





Notes:


THOMSON 


Made in PRC  Text font:Arial Bold

Rated Input: 22V  Text font:Arial Bold


 US: TMBDL01BTG587NV2
 FCC ID: RSE-TG587NV2
 The text below "FCC" logo font is Arial bold.


 3066999
 CONFORMS TO:
 UL STD 60950-1
 CERTIFIED TO:
 CAN/CSA STD C22.2
 No.60950-1
 The text below the"ETL" logo font is Arial bold and height is 0.9mm

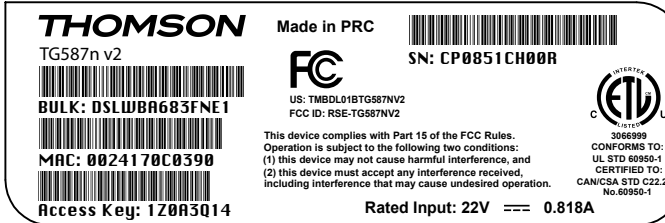

THOMSON Made in PRC
 TG587n v2
 SN: CP0851CH00R
FCC
 US: TMBDL01BTG587NV2
 FCC ID: RSE-TG587NV2
 This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
 (1) this device may not cause harmful interference, and
 (2) this device must accept any interference received, including interference that may cause undesired operation.
ETL
 3066999
 CONFORMS TO:
 UL STD 60950-1
 CERTIFIED TO:
 CAN/CSA STD C22.2
 No.60950-1
 BULK: DSLWBA683FNE1
 MAC: 0024170C0390
 Access Key: 1Z0A3Q14
 Rated Input: 22V 

“ This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
 (1) this device may not cause harmful interference, and
 (2) this device must accept any interference received, including interference that may cause undesired operation. ”
 Text height is 0.9mm

safety logo scale is 2:1

Others description:

Serial Label	
Category	Housing label
Label dimensions	89.5mm x 29.5mm,R6mm * 3 3 rounded and 1 right angled corner (top left corner)
Position	Bottom of the plastic housing, in the space foreseen on the bottom
Text Font	Chicago. Exception: "Series "is printed by Univers
Height	2.2mm;
Barcode Symbology	Code 93
Height	4mm
Check Character	2 digits
Bar width	0.17mm

MATERIAL (SPEC.)										SCALE
Mylar 3M7815										1:1
FINISH										SHEET
										1/1
Select Dim.	tol.	A	B	C	EPS	EPE	BAG	CTN	Label	UNIT
0~6	0.05	0.05	0.10						0.20	MM
6~30	0.10	0.15	0.20	0.50	0.50	3.00			0.20	
30~120	0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25		
120~300	0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30		
300~450	0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50		
450~600	0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80		
DRAFT TOLERANCE ± 0.2°										CRITICAL DIM. MARK *

FOXCONN		
HON HAI PRECISION IND. CO., LTD. CNSBG		
PART NAME	housing label	
MODEL	PART NO.	DESIGNED
U46L152		Xie Rong
CUSTOMER MODEL	CUSTOMER PART NO.	APPROVED
TG587n v2		Sunny wu


REV.	MARK	ECR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
0	N/A	N/A	09/03/11	First Release	Xie Rong

Notes:




Made in PRC Text font:Arial Bold

Rated Input: 22V 0.818A Text font:Arial Bold

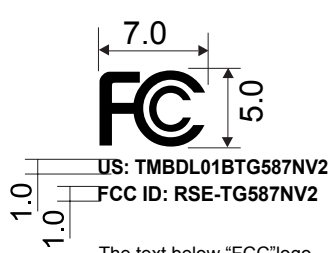

The text below "FCC" logo font is Arial bold.



The text below the "ETL" logo font is Arial bold and height is 0.9mm

“ This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
 (1) this device may not cause harmful interference, and
 (2) this device must accept any interference received, including interference that may cause undesired operation. ”

Text height is 0.9mm

safety logo scale is 2:1


Others description:

Serial Label	
Category	Housing label
Label dimensions	89.5mm x 29.5mm, R6mm * 3 3 rounded and 1 right angled corner (top left corner)
Position	Bottom of the plastic housing, in the space foreseen on the bottom
Text Font	Chicago. Exception: "Series "is printed by Univers
Height	2.2mm;
Barcode Symbology	Code 93
Height	4mm
Check Character	2 digits
Bar width	0.17mm

MATERIAL (SPEC.)										SCALE
Mylar 3M7815										1:1
FINISH										SHEET
										1/1
Select Dim.	tol.	A	B	C	EPS	EPE	BAG	CTN	Label	UNIT
0~6		0.05	0.05	0.10					0.20	MM
6~30		0.10	0.15	0.20	0.50	0.50	3.00		0.20	
30~120		0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25	
120~300		0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30	
300~450		0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50	
450~600		0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80	
DRAFT TOLERANCE ± 0.2°										CRITICAL DIM. MARK *

FOXCONN		
HON HAI PRECISION IND. CO., LTD. CNSBG		
PART NAME	housing label	
MODEL	PART NO.	DESIGNED
U46L152		Xie Rong
CUSTOMER MODEL	CUSTOMER PART NO.	APPROVED
TG585n v2		Sunny wu

REV.	MARK	ECR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
0	N/A	N/A	09/03/11	First Release	Xie Rong

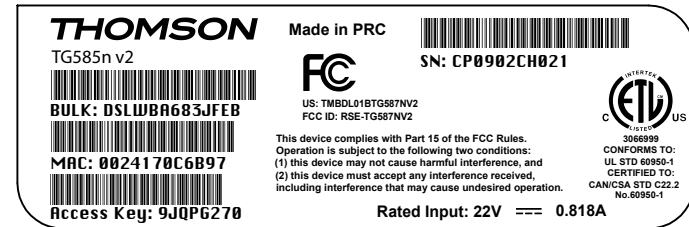

THOMSON
Series

BULK: UNICBSFFFFR1

MAC: AAABCC0DEEE

Access Key: A1B2C304

SN: CPYYWHPRHK


CE

THOMSON TELECOM

Rated Input: 22V 0.818A

FCC Label should be put here to replace this

Look at this, you can know which

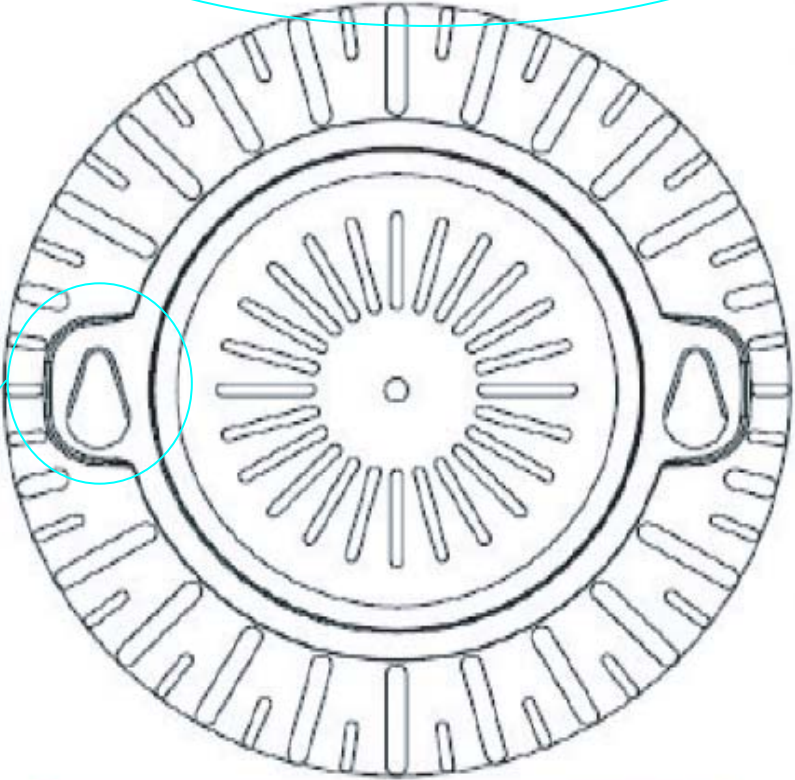

Network Name: ThomsonUUUUUU

Wireless Key: 1234ABCDEF

SN: CPYYWHPRHK

1234-5678

WiFi CERTIFIED