

# RADIO TEST REPORT

According to

47 CFR FCC Part 15 Subpart C § 15.247

**Equipment** : TG703 DSLVBB643 JC  
TG703 DSLVBB643 US  
**Brand Name** : **Technicolor**  
**Filing Type** : **New Application**  
**Applicant** : **Thomson Telecom Belgium**  
Prins Boudewijnlaan 47 B-2650 Edegem Belgium  
**FCC ID** : RSE-TG703  
**Received Date** : Sep. 20, 2010  
**Final Test Date** : Oct. 19, 2010

## Statement

**This report is only covering the 802.11b/g/n modes of operation of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.

  
Wayne Hsu /Vice Manager



**SPORTON International Inc.**

No. 52 Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

## **Contents**

- 1. SUMMARY OF THE TEST RESULTS..... 1**
- 2. GENERAL INFORMATION..... 2**
  - 2.1. Interface Ports ..... 2
  - 2.2. Information of the Power Supply Unit: ..... 2
  - 2.3. Information of the Radio Interface ..... 2
  - 2.4. Table for Filed Antenna ..... 3
  - 2.5. Table for Carrier Frequencies ..... 4
  - 2.6. Test Modes ..... 4
  - 2.7. Testing Locations ..... 4
  - 2.8. Supporting Units ..... 5
  - 2.9. Test Software ..... 5
  - 2.10. Test Configurations ..... 6
- 3. TEST RESULTS..... 8**
  - 3.1. AC Power Line Conducted Emissions Measurement..... 8
  - 3.2. Maximum Peak Output Power Measurement..... 12
  - 3.3. Power Spectral Density Measurement ..... 14
  - 3.4. 6dB Spectrum Bandwidth Measurement..... 21
  - 3.5. Radiated Emissions Measurement..... 28
  - 3.6. Band Edge Emissions Measurement ..... 52
  - 3.7. Antenna Requirements..... 59
- 4. LIST OF MEASURING EQUIPMENTS ..... 60**
- 5. TEST LOCATIONS ..... 62**
- 6. TAF CERTIFICATE OF ACCREDITATION..... 63**
- APPENDIX A. MAXIMUM PERMISSIBLE EXPOSURE..... A1 ~ A3**
- APPENDIX B. TEST PHOTOS ..... B1 ~ B6**
- APPENDIX C. PHOTOGRAPHS OF EUT ..... C1 ~ C14**



**1. SUMMARY OF THE TEST RESULTS**

<b>Applied Standard: 47 CFR FCC Part 15 Subpart C</b>				
<b>Part</b>	<b>Rule Section</b>	<b>Description of Test</b>	<b>Result</b>	<b>Under Limit</b>
3.1	15.207	AC Power Line Conducted Emissions	Complies	15.68 dB
3.2	15.247(b)(3)	Maximum Peak Conducted Output Power	Complies	4.91 dB
3.3	15.247(e)	Power Spectral Density	Complies	17.43 dB
3.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
3.5	15.247(d)	Radiated Emissions	Complies	1.20 dB
3.6	15.247(d)	Band Edge Emissions	Complies	0.23 dB
3.7	15.203	Antenna Requirements	Complies	-

<b>Test Items</b>	<b>Uncertainty</b>	<b>Remark</b>
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Peak Conducted Output Power	±0.8dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
6dB Spectrum Bandwidth	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

**2. GENERAL INFORMATION**

Trade Name : Technicolor  
 Hardware Version : PEM3

**2.1. Interface Ports**

The table below shows the interface ports that are equipped on the models:

Equipment	Product code	POWER	DSL	VoIP	Ethernet 10/100 base-T	Wireless LAN IEEE802.11n
TG703	DSLVB643 JC	☒	☒	☒ (1-port)	☒ (4-ports)	☒
TG703	DSLVB643 US	☒	☒	☒ (1-port)	☒ (4-ports)	☒

☒: Equipped    ☐: Not equipped

TG703 is the DSL modems used over POTS – Plain Old Telephone Service.

**2.2. Information of the Power Supply Unit:**

Trade Name	Product Number	Input Rating	Output Rating	Type	Company Info
FRIWO	FW7599/US/12	100Vac ~ 240Vac	12 Vdc / 1.0 A	Switched / Wall mount	FRIWO Gerätebau GmbH / FRIWO Mobile Power GmbH P.O. Box 1164 Von-Liebig-Straße 11D-48346 Ostbevern

**2.3. Information of the Radio Interface**

The EUT is with IEEE 802.11b/g/n radio functions.

**IEEE 802.11b/g**

Items	Description
Power Type	12Vdc from adapter
Modulation	DSSS for IEEE 802.11b; OFDM for IEEE 802.11g
Data Modulation	DSSS (DBPSK / DQPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11); OFDM (6/9/12/18/24/36/48/54)
Frequency Band	2400 ~ 2483.5MHz
Total Amount of Channels	11

**IEEE 802.11n**

Items	Description
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Frequency Band	2400 ~ 2483.5MHz
Total Amount of Channels	11

The table below is the general spec of IEEE 802.11n. However, the radio is operated only in 800nsGI mode with Occupied Band Width (OBW) of 20 MHz.

MCS Index	Nss	Modulation	R	NBPS	NCBPS		NDBPS		Data rate(Mbps)			
					20MHz	40MHz	20MHz	40MHz	800nsGI		400nsGI	
									20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5	7.200	15
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0	14.400	30
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5	21.700	45
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0	28.900	60
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0	43.300	90
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0	57.800	120
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5	65.000	135
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0	72.200	150
8	2	BPSK	1/2	1	104	216	52	108	13.0	27.0	14.444	30
9	2	QPSK	1/2	2	208	432	104	216	26.0	54.0	28.889	60
10	2	QPSK	3/4	2	208	432	156	324	39.0	81.0	43.333	90
11	2	16-QAM	1/2	4	416	864	208	432	52.0	108.0	57.778	120
12	2	16-QAM	3/4	4	416	864	312	648	78.0	162.0	86.667	180
13	2	64-QAM	2/3	6	624	1296	416	864	104.0	216.0	115.556	240
14	2	64-QAM	3/4	6	624	1296	468	972	117.0	243.0	130.000	270
15	2	64-QAM	5/6	6	624	1296	520	1080	130.0	270.0	144.444	300

Symbol	Explanation
Nss	Number of spatial streams
R	Code rate
NBPS	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	Guard interval

**2.4. Table for Filed Antenna**

The table below shows the maximum antenna gain of each antenna equipped inside the EUT.

Ant. No.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Remark
1	WHA YU	-	Dipole Antenna	NA	2.81	TX / RX
2	-	-	Printed Antenna	NA	2.48	RX

**2.5. Table for Carrier Frequencies**

The table below is the mapping between the carrier frequencies and the channel numbers.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

**2.6. Test Modes**

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case data rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report. (All the test results are for 110V /60Hz)

Test Items	Mode	Data Rate	Channel
AC Power Line Conducted Emissions	See Note	-	-
Maximum Peak Conducted Output Power Power Spectral Density 6dB Spectrum Bandwidth	11b/BPSK	1 Mbps	1/6/11
	11g/BPSK	6 Mbps	1/6/11
	11n/MCS0	6.5 Mbps	1/6/11
Radiated Emissions 9kHz~1GHz	11g/BPSK	6 Mbps	6
Radiated Emissions 1GHz~10th Harmonic	11b/BPSK	1 Mbps	1/6/11
	11g/BPSK	6 Mbps	1/6/11
	11n/MCS0	6.5 Mbps	1/6/11
Band Edge Emissions	11b/BPSK	1 Mbps	1/6/11
	11g/BPSK	6 Mbps	1/6/11
	11n/MCS0	6.5 Mbps	1/6/11

Note :  
The followings are the modes for Conducted Emissions:  
Mode 1. Measured on AC port – ADSL2+ Annex A

**2.7. Testing Locations**

Test Site No.	Site Category	Location
03CH02-HY	SAC	Hwa Ya
CO04-HY	Conduction	Hwa Ya
TH01-HY	OVEN Room	Hwa Ya

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 5 for Test Site Addresses.

**2.8. Supporting Units**

Support Unit	Brand	Model	FCC ID
Telephone	HTT	HTT-806	-
PC(x2) (Remote Workstation)	HP	d330uT	-
Monitor(x2) (Remote Workstation)	Jean	JC278AA11U	-
Notebook (Remote Workstation)	DELL	PP32LB	DoC
Keyboard (x2) (Remote Workstation)	BTC	9110	-
Mouse (x2) (Remote Workstation)	Logitech	M-SBM96B	-
CO. (Remote Workstation)	Mediulinces	DSLlinuxX 6512	-

**2.9. Test Software**

The testing software/command was provided by the manufacturer and was used to control the operating channel and the proper data rate for the testing.

**Power Parameters of IEEE 802.11b/g/n**


Test Software Version	Ttermpro		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	8	9	7
IEEE 802.11g	10	13	9
IEEE 802.11n (MCS0)	10	13	9




**2.10. Test Configurations**

**2.10.1. Radiation Emissions Test Configuration**

<For radiated emissions 9KHz ~ 1GHz test>

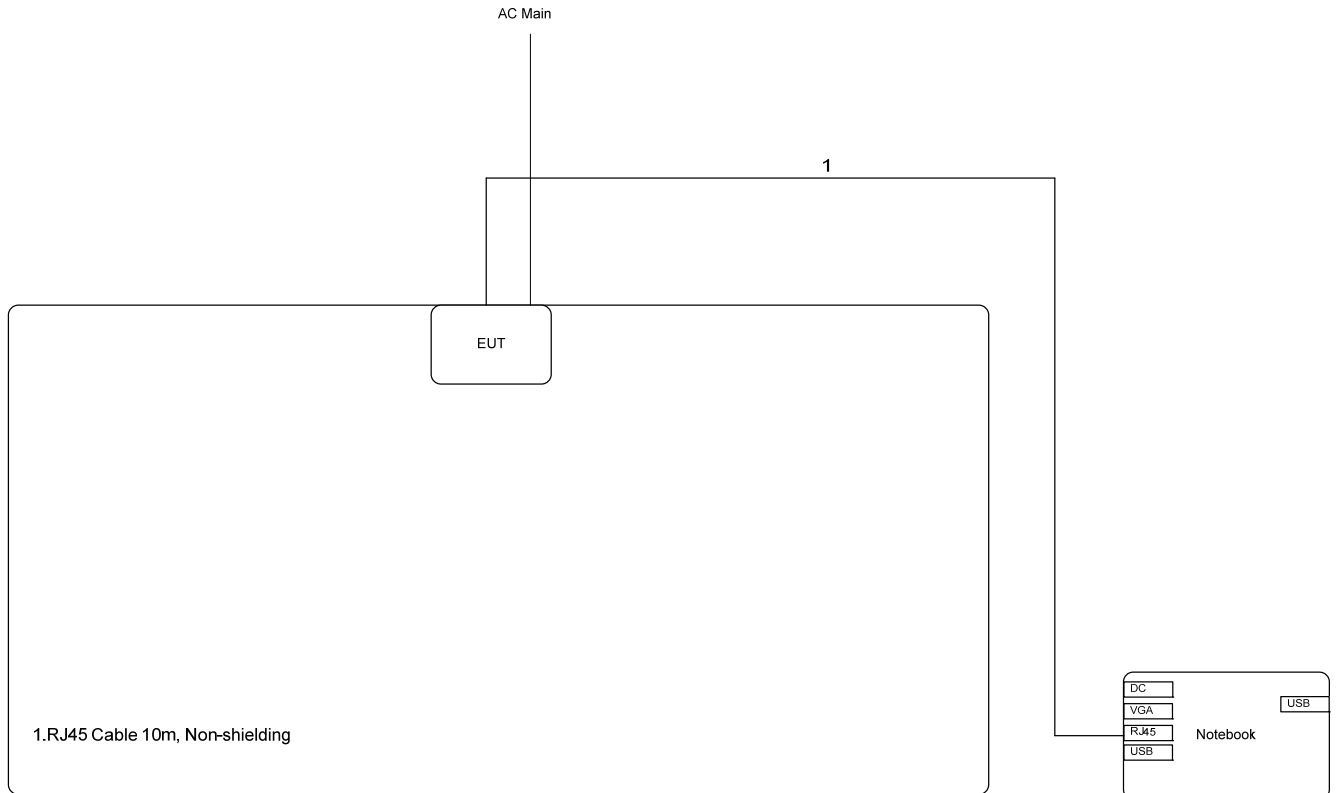

**<For radiated emissions above 1GHz test>**

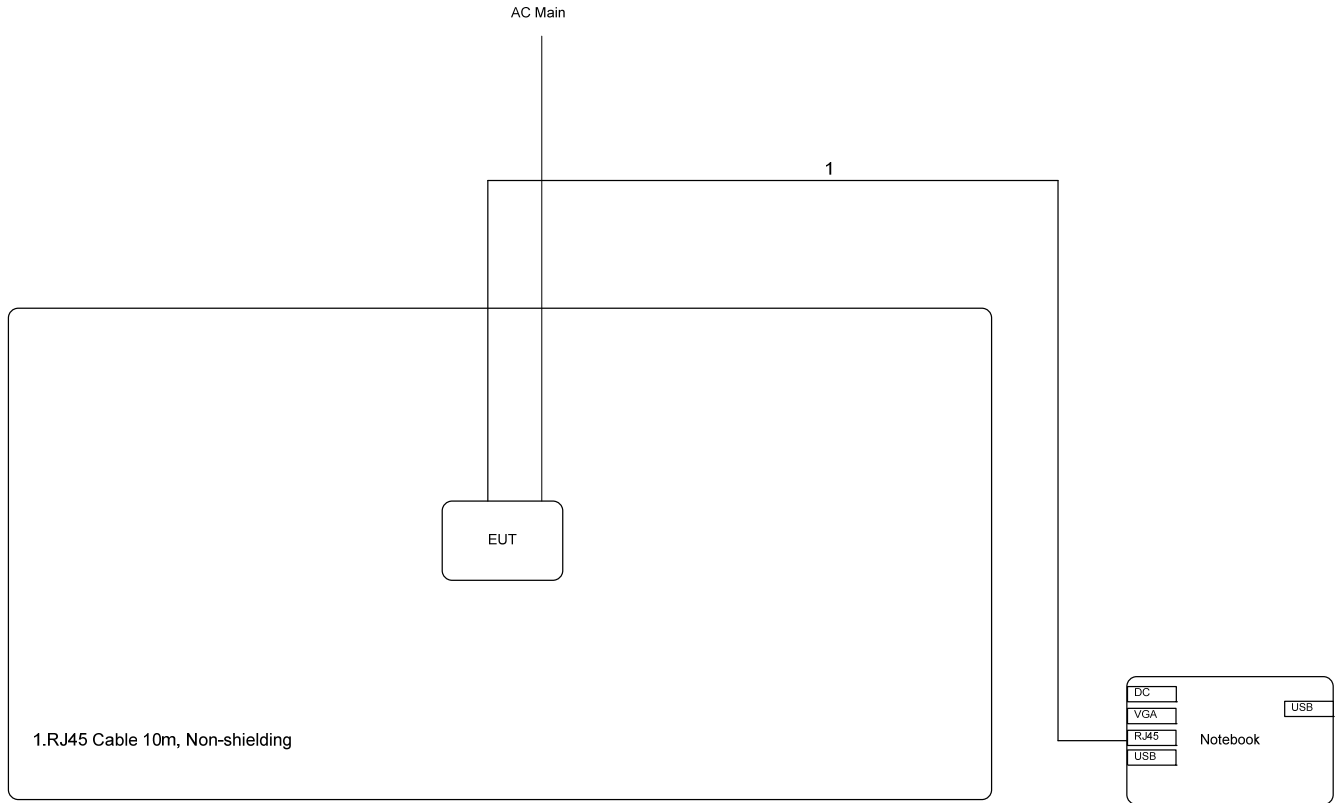

### 3. TEST RESULTS

#### 3.1. AC Power Line Conducted Emissions Measurement

##### 3.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

##### 3.1.2. Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

##### 3.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

**3.1.4. Test Setup Layout**

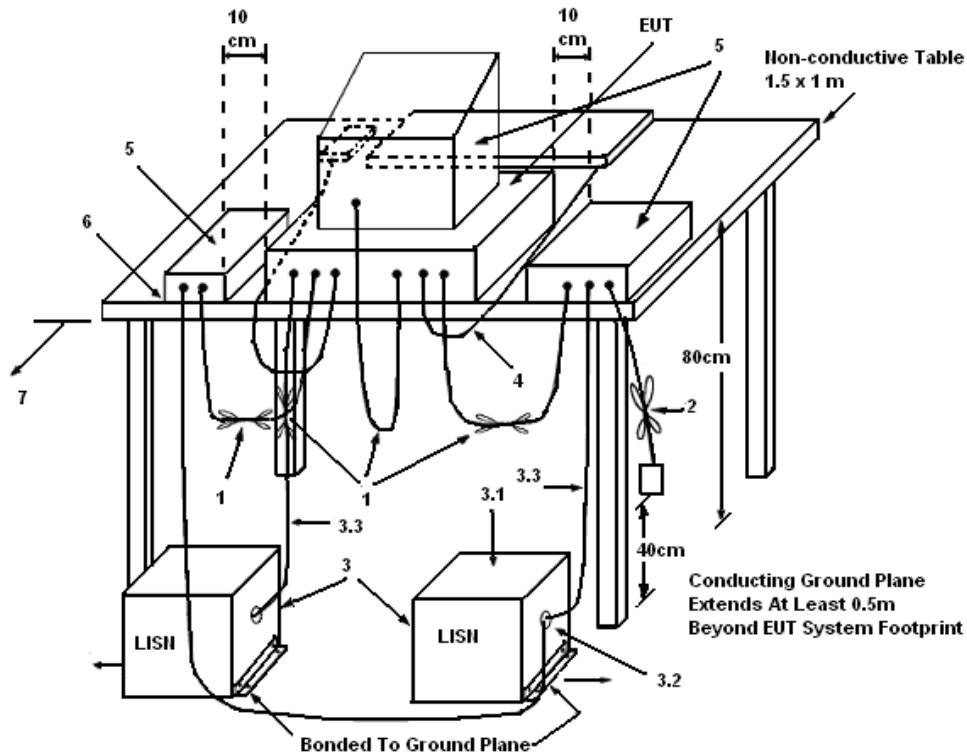

**LEGEND:**

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

**3.1.5. Test Deviation**

There is no deviation with the original standard.


**3.1.6. EUT Operation during Test**

The EUT was placed on the test table and programmed in normal function.

**3.1.7. Results of AC Power Line Conducted Emissions Measurement**


<b>Test Date</b>	Oct. 08, 2010	<b>Test Site No.</b>	CO04-HY
<b>Temperature</b>	25.3°C	<b>Humidity</b>	51.8%
<b>Test Engineer</b>	Ken Zhung	<b>Configuration</b>	Mode 1

*Line*

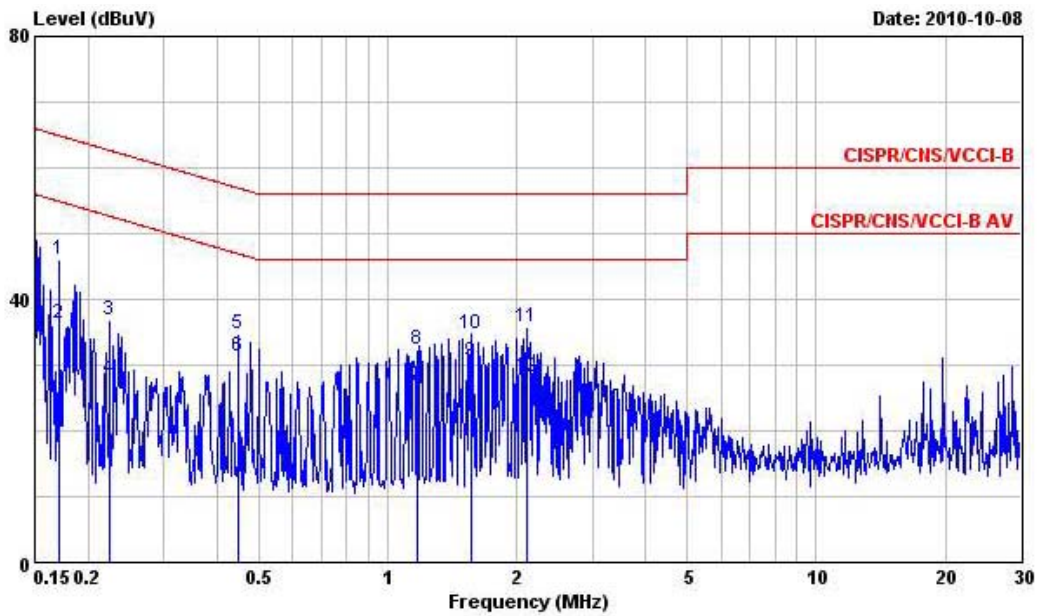

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.1705980	45.97	-18.96	64.93	45.38	0.30	0.29	QP
2	0.1705980	36.31	-18.62	54.93	35.72	0.30	0.29	Average
3	0.2238950	36.87	-25.80	62.67	36.28	0.30	0.29	QP
4	0.2238950	27.95	-24.72	52.67	27.36	0.30	0.29	Average
5	0.4458990	34.65	-22.30	56.95	34.26	0.29	0.10	QP
6	0.4458990	31.27	-15.68	46.95	30.88	0.29	0.10	Average
7	1.174	26.96	-19.04	46.00	26.55	0.29	0.12	Average
8	1.174	32.42	-23.58	56.00	32.01	0.29	0.12	QP
9	1.560	30.48	-15.52	46.00	30.05	0.30	0.13	Average
10	1.560	34.86	-21.14	56.00	34.43	0.30	0.13	QP
11	2.120	35.78	-20.22	56.00	35.32	0.31	0.15	QP
12	2.120	28.11	-17.89	46.00	27.65	0.31	0.15	Average

**Neutral**

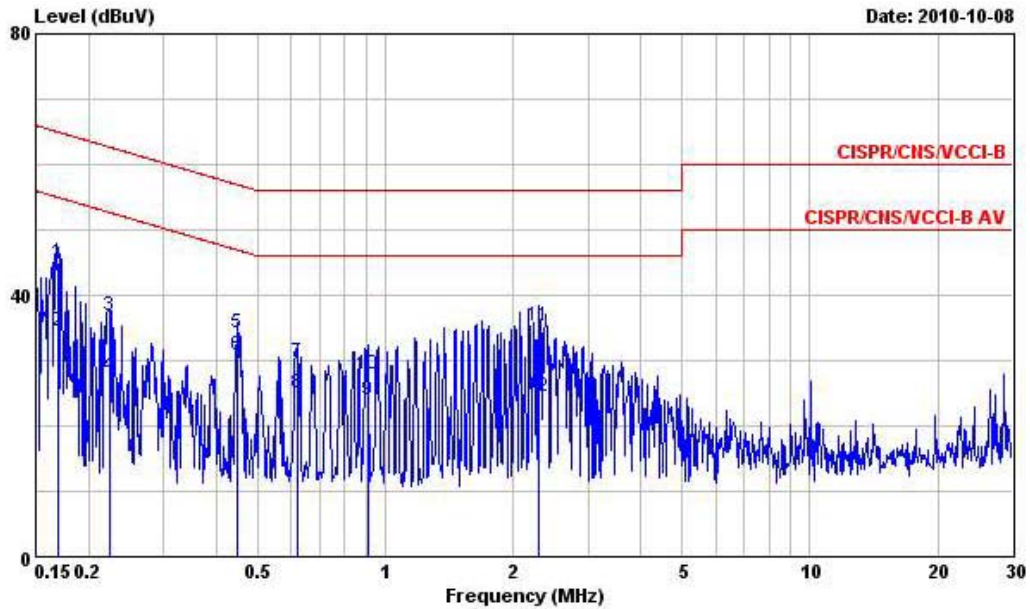

	Freq	Level	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1694400	45.01	-19.98	64.99	44.46	0.26	0.29	QP
2	0.1694400	34.39	-20.60	54.99	33.84	0.26	0.29	Average
3	0.2231870	36.96	-25.74	62.70	36.42	0.25	0.29	QP
4	0.2231870	27.52	-25.18	52.70	26.98	0.25	0.29	Average
5	0.4491640	34.10	-22.79	56.89	33.76	0.24	0.10	QP
6	0.4491640	30.72	-16.17	46.89	30.38	0.24	0.10	Average
7	0.6205370	29.61	-26.39	56.00	29.26	0.24	0.11	QP
8	0.6205370	24.98	-21.02	46.00	24.63	0.24	0.11	Average
9	0.9087440	23.89	-22.11	46.00	23.52	0.25	0.12	Average
10	0.9087440	28.00	-28.00	56.00	27.63	0.25	0.12	QP
11	2.300	35.26	-20.74	56.00	34.83	0.27	0.16	QP
12	2.300	24.57	-21.43	46.00	24.14	0.27	0.16	Average

Note:

Level = Read Level + LISN Factor + Cable Loss.

**3.2. Maximum Peak Output Power Measurement**

**3.2.1. Limit**

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limit has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

**3.2.2. Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Filter No.	Auto
Measurement time	0.135 s ~ 26 s
Used Peak Sensor	MA2411B

**3.2.3. Test Procedures**

1. The transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the peak power value.
3. Repeat above procedures on all channels needed to be tested.
4. While measuring multiple antennas, the connectors are required to link with Power Meter through a combiner.

**3.2.4. Test Setup Layout**

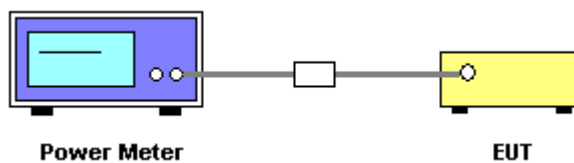

**3.2.5. Test Deviation**

There is no deviation with the original standard.

**3.2.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.2.7. Test Result of Maximum Peak Output Power**

<b>Test Date</b>	Oct. 13, 2010	<b>Test Site No.</b>	TH01-HY
<b>Temperature</b>	22.5°C	<b>Humidity</b>	65%
<b>Test Engineer</b>	Ian	<b>Configurations</b>	802.11b/g

**Configuration IEEE 802.11b**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	19.29	30.00	<b>Complies</b>
6	2437 MHz	19.58	30.00	<b>Complies</b>
11	2462 MHz	18.08	30.00	<b>Complies</b>

**Configuration IEEE 802.11g**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	24.25	30.00	<b>Complies</b>
6	2437 MHz	24.85	30.00	<b>Complies</b>
11	2462 MHz	23.72	30.00	<b>Complies</b>

<b>Test Date</b>	Oct. 13, 2010	<b>Test Site No.</b>	TH01-HY
<b>Temperature</b>	22.5°C	<b>Humidity</b>	65%
<b>Test Engineer</b>	Ian	<b>Configurations</b>	802.11n

**Configuration IEEE 802.11n MCS0 20MHz**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	24.55	30.00	<b>Complies</b>
6	2437 MHz	25.09	30.00	<b>Complies</b>
11	2462 MHz	23.97	30.00	<b>Complies</b>





**3.3.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.3.7. Test Result of Power Spectral Density**

<b>Test Date</b>	Oct. 13, 2010	<b>Test Site No.</b>	TH01-HY
<b>Temperature</b>	22.5°C	<b>Humidity</b>	65%
<b>Test Engineer</b>	Ian	<b>Configurations</b>	802.11b/g

**Configuration IEEE 802.11b**

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-9.43	8.00	<b>Complies</b>
6	2437 MHz	-10.25	8.00	<b>Complies</b>
11	2462 MHz	-11.75	8.00	<b>Complies</b>

**Configuration IEEE 802.11g**


Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-11.64	8.00	<b>Complies</b>
6	2437 MHz	-10.69	8.00	<b>Complies</b>
11	2462 MHz	-12.49	8.00	<b>Complies</b>

<b>Test Date</b>	Oct. 13, 2010	<b>Test Site No.</b>	TH01-HY
<b>Temperature</b>	22.5°C	<b>Humidity</b>	65%
<b>Test Engineer</b>	Ian	<b>Configurations</b>	802.11n (MCS0)

**Configuration IEEE 802.11n MCS0 20MHz**


Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-10.83	8.00	<b>Complies</b>
6	2437 MHz	-11.56	8.00	<b>Complies</b>
11	2462 MHz	-11.42	8.00	<b>Complies</b>

Power Density Plot on Configuration IEEE 802.11b / 2412 MHz

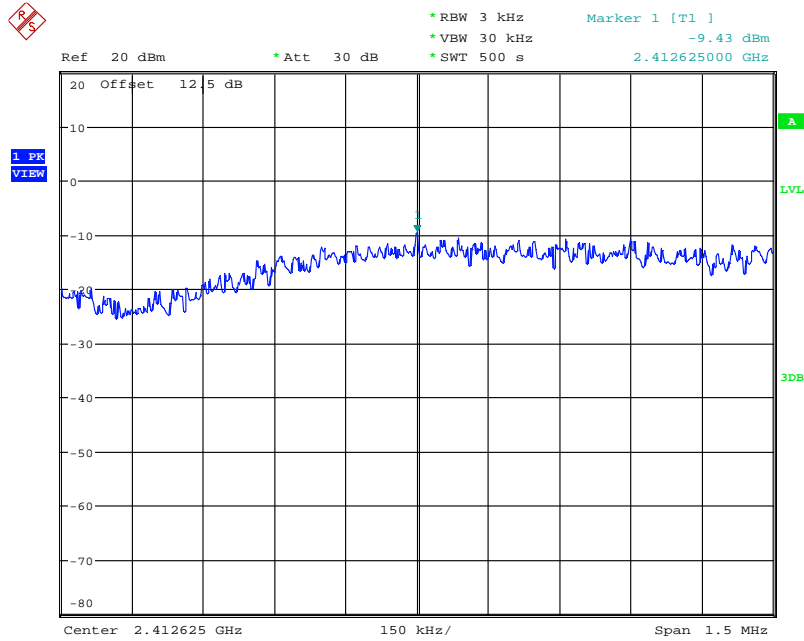


Date: 13.OCT.2010 10:46:55

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz

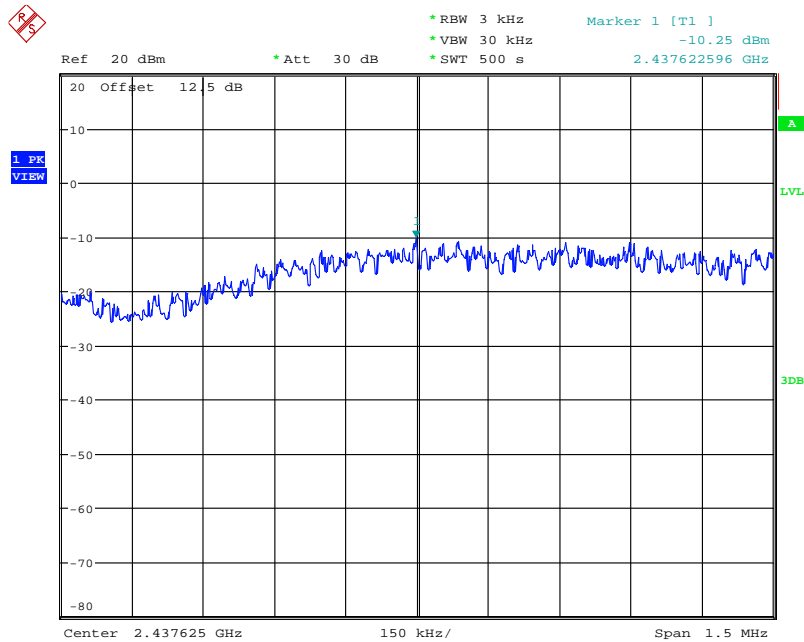


Date: 13.OCT.2010 10:53:10

Power Density Plot on Configuration IEEE 802.11b / 2462 MHz

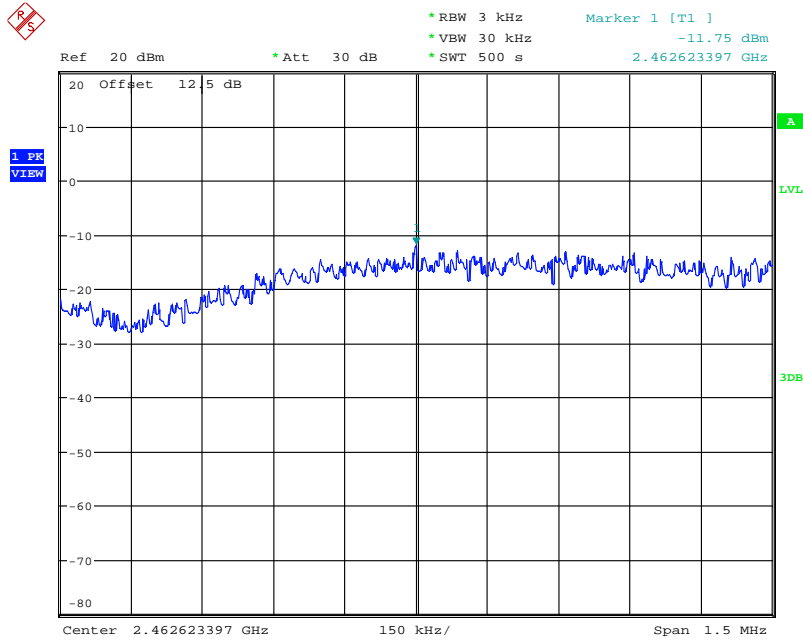


Date: 13.OCT.2010 10:55:24

Power Density Plot on Configuration IEEE 802.11g / 2412 MHz

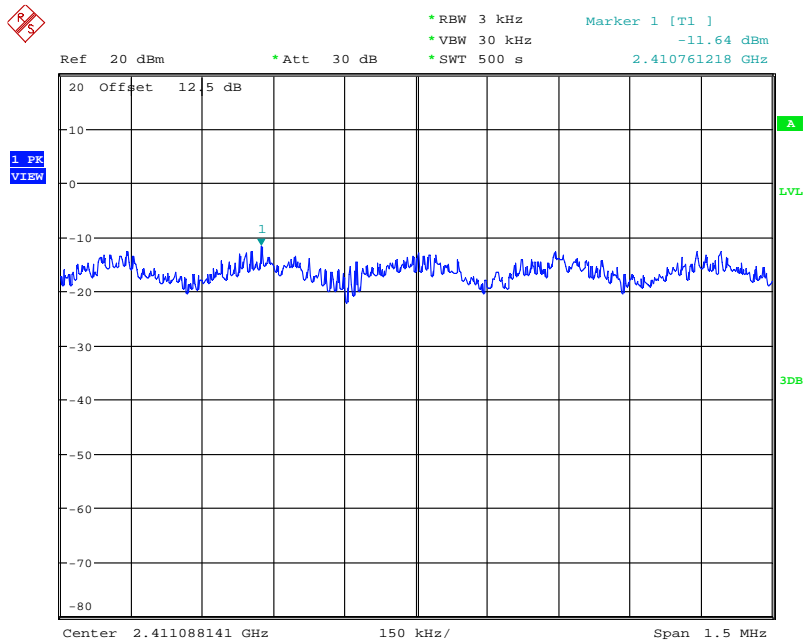


Date: 13.OCT.2010 10:57:01

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz

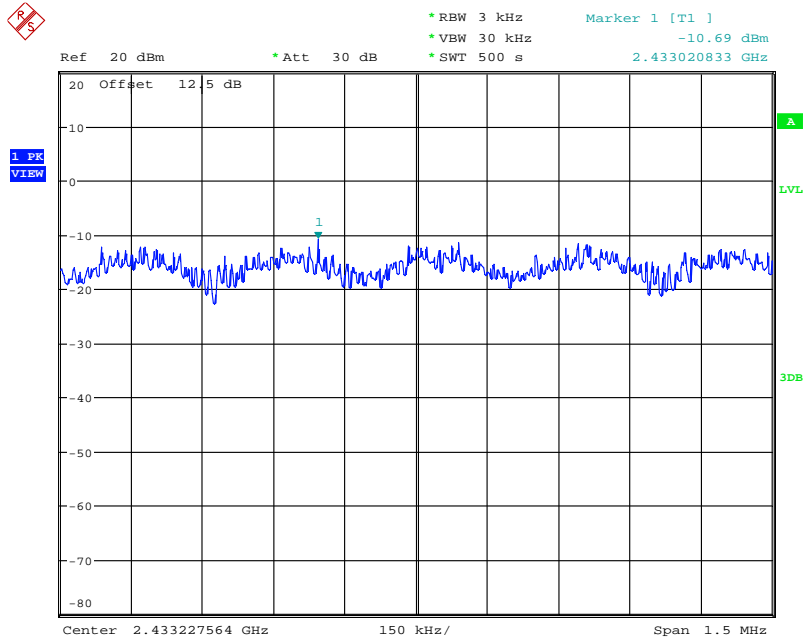


Date: 13.OCT.2010 10:58:38

Power Density Plot on Configuration IEEE 802.11g / 2462 MHz

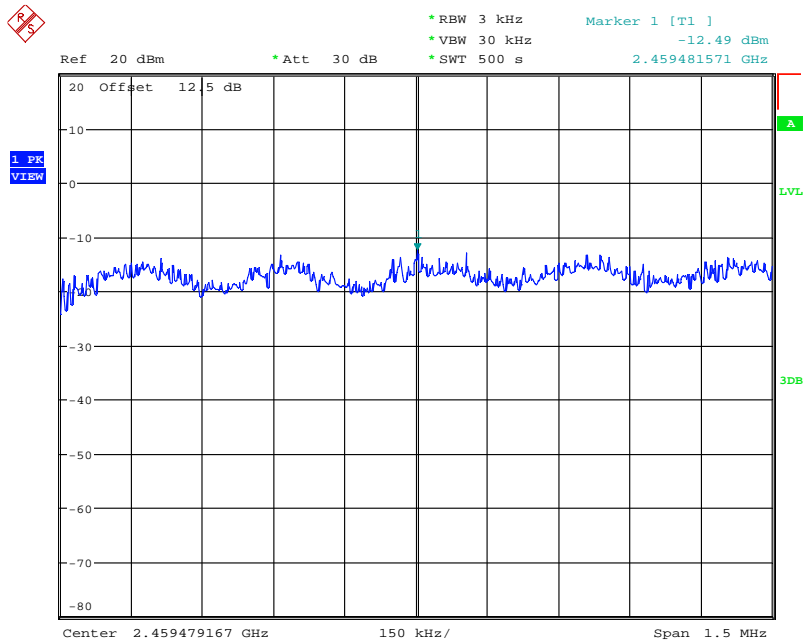


Date: 13.OCT.2010 11:00:16

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 2412 MHz

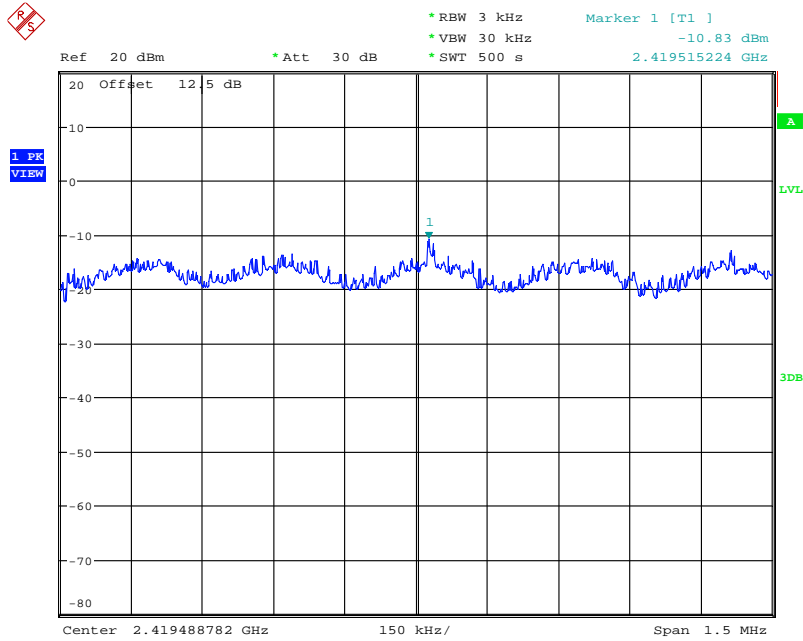


Date: 13.OCT.2010 11:01:59

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 2437 MHz

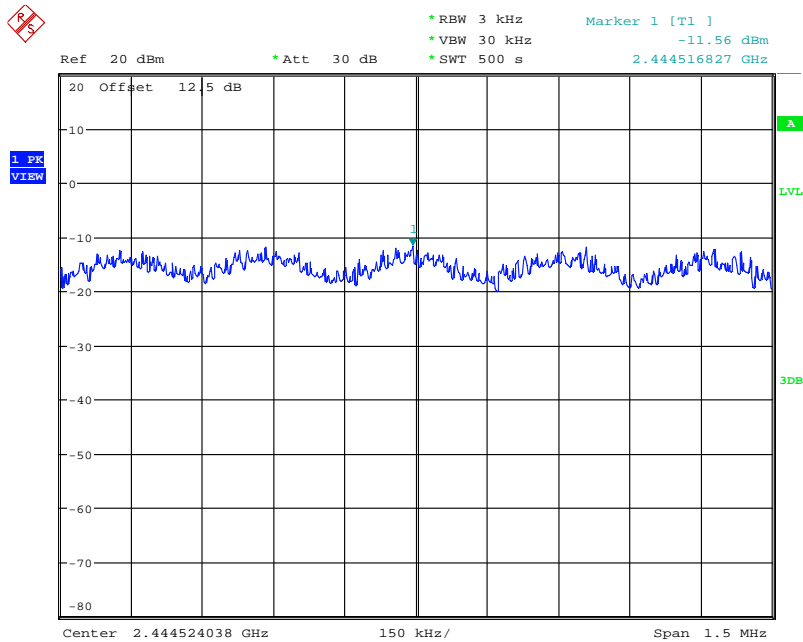

Date: 13.OCT.2010 11:03:23

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 2462 MHz

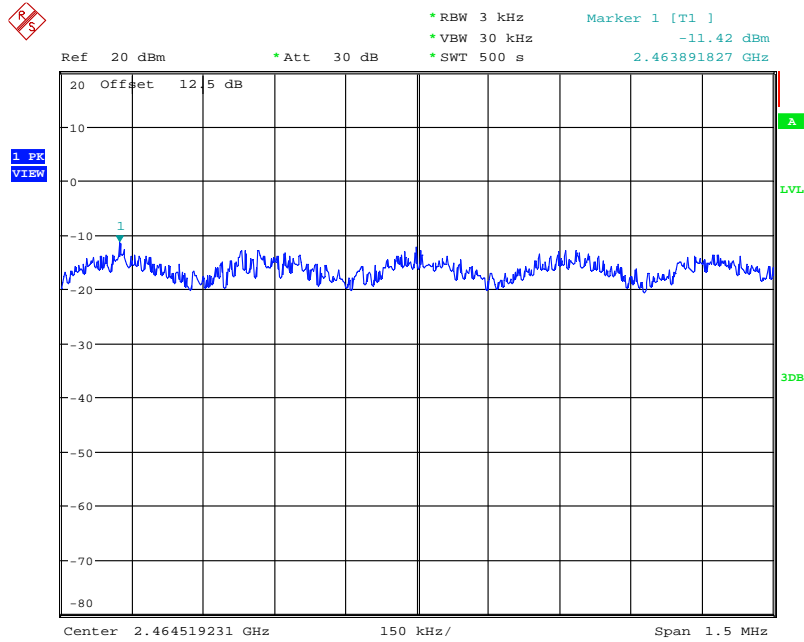

Date: 13.OCT.2010 11:04:49

**3.4. 6dB Spectrum Bandwidth Measurement**

**3.4.1. Limit**

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

**3.4.2. Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

**3.4.3. Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.
4. In case of conducted measurements on smart antenna systems (devices with multiple transmit chains) a power splitter/combiner shall be used to combine all the transmit chains (antenna outputs) into a single test point. The insertion loss of the power splitter/combiner shall be taken into account.

**3.4.4. Test Setup Layout**

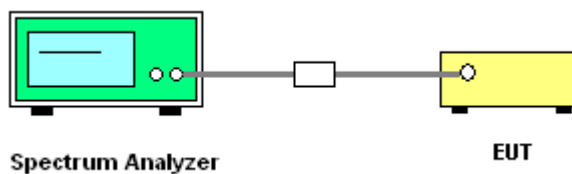

**3.4.5. Test Deviation**

There is no deviation with the original standard.

**3.4.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.



**3.4.7. Test Result of 6dB Spectrum Bandwidth**

<b>Test Date</b>	Sep. 20, 2010	<b>Test Site No.</b>	TH01-HY
<b>Temperature</b>	22.5°C	<b>Humidity</b>	65%
<b>Test Engineer</b>	Ian	<b>Configurations</b>	802.11b/g

**Configuration IEEE 802.11b**

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	12.12	15.08	500	<b>Complies</b>
6	2437 MHz	12.12	15.08	500	<b>Complies</b>
11	2462 MHz	12.12	15.12	500	<b>Complies</b>

**Configuration IEEE 802.11g**


Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.36	16.44	500	<b>Complies</b>
6	2437 MHz	16.36	16.44	500	<b>Complies</b>
11	2462 MHz	16.36	16.44	500	<b>Complies</b>

<b>Test Date</b>	Sep. 20, 2010	<b>Test Site No.</b>	TH01-HY
<b>Temperature</b>	22.5°C	<b>Humidity</b>	65%
<b>Test Engineer</b>	Ian	<b>Configurations</b>	802.11n (MCS0)

**Configuration IEEE 802.11n MCS0 20MHz**


Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	17.08	17.56	500	<b>Complies</b>
6	2437 MHz	17.08	17.56	500	<b>Complies</b>
11	2462 MHz	17.08	17.56	500	<b>Complies</b>

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz

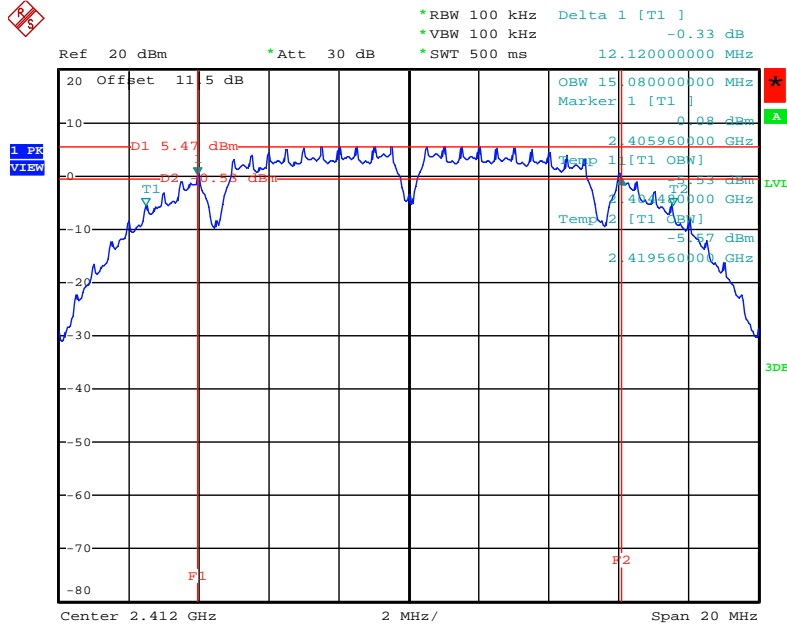


Date: 20.SEP.2010 16:29:51

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz

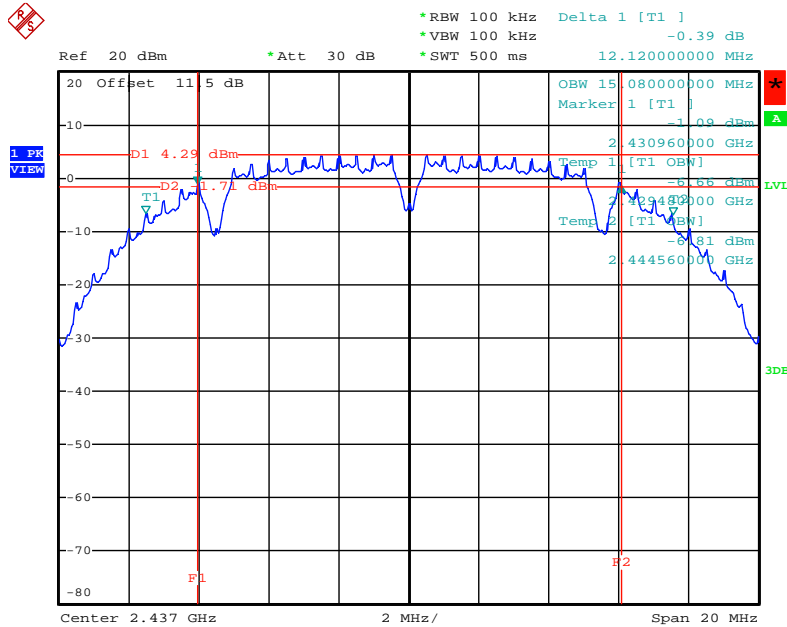


Date: 20.SEP.2010 16:14:56

**6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz**

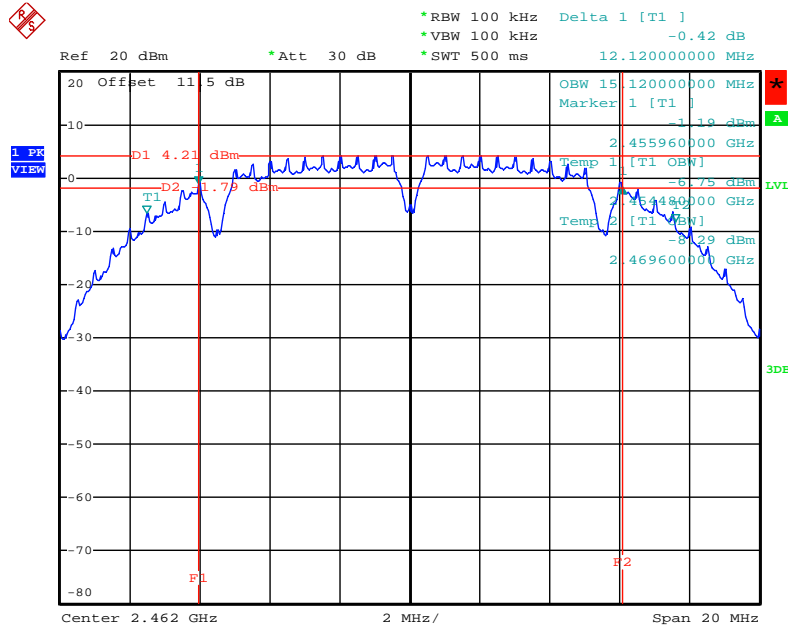


Date: 20.SEP.2010 16:26:59

**6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz**

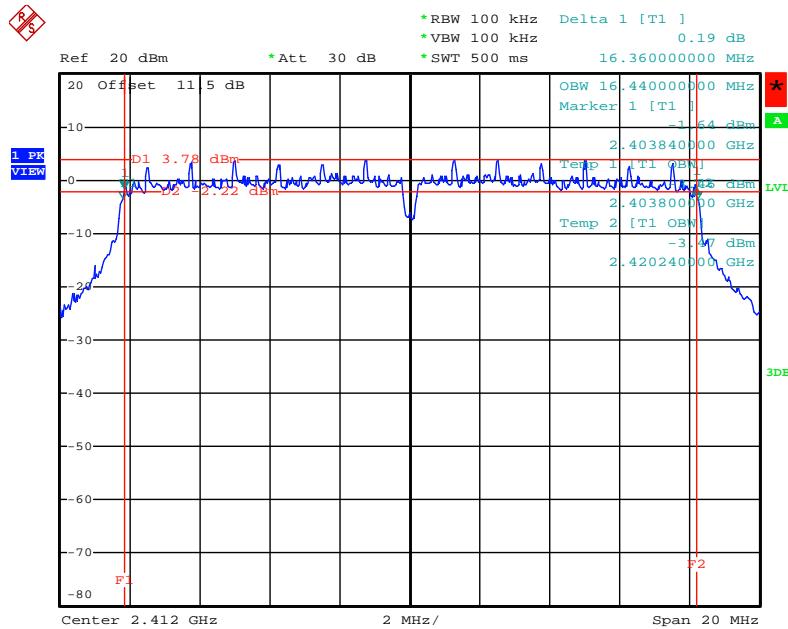


Date: 20.SEP.2010 16:32:56

**6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz**

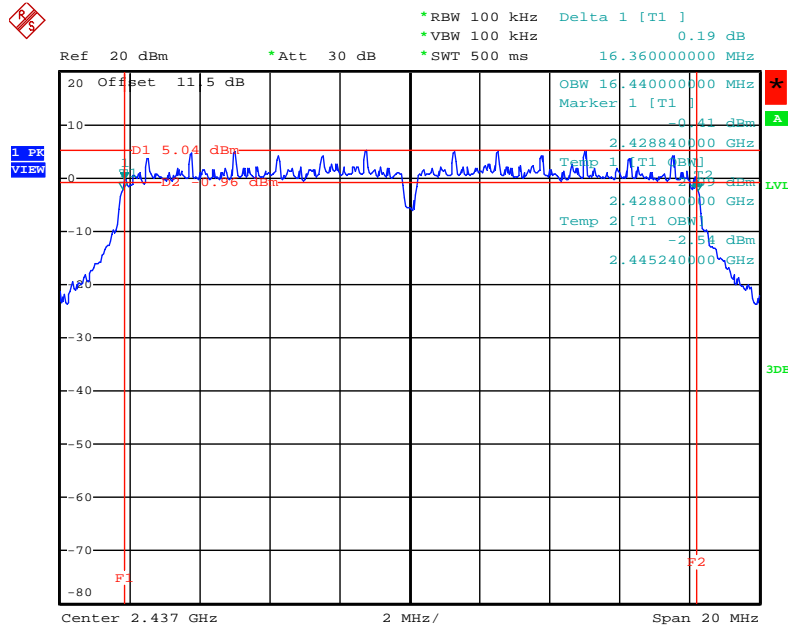


Date: 20.SEP.2010 16:46:30

**6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2462 MHz**

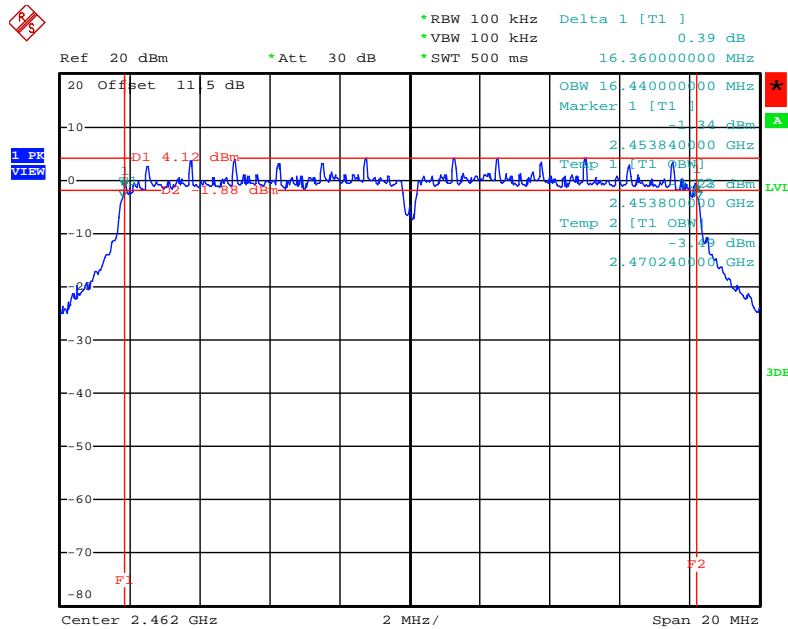


Date: 20.SEP.2010 16:52:03

**6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / 2412 MHz**

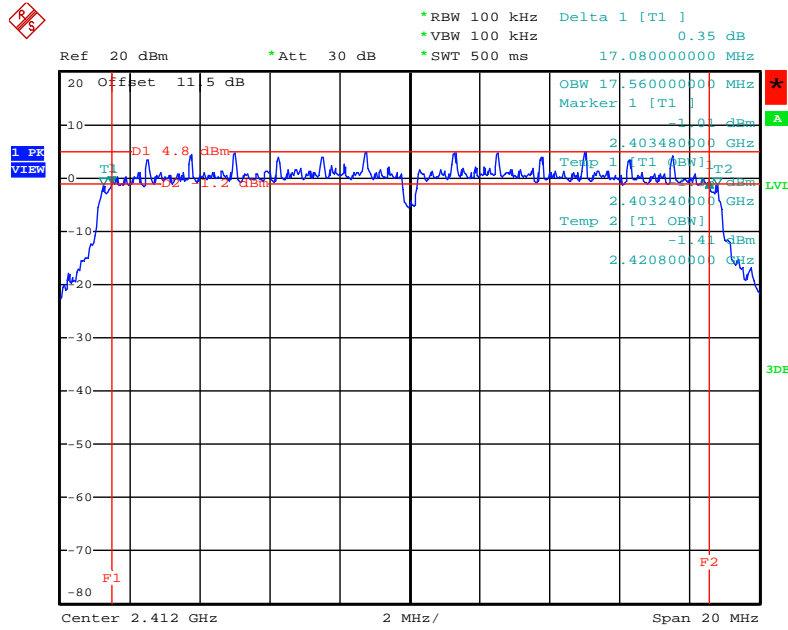


Date: 20.SEP.2010 16:57:07

**6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / 2437 MHz**

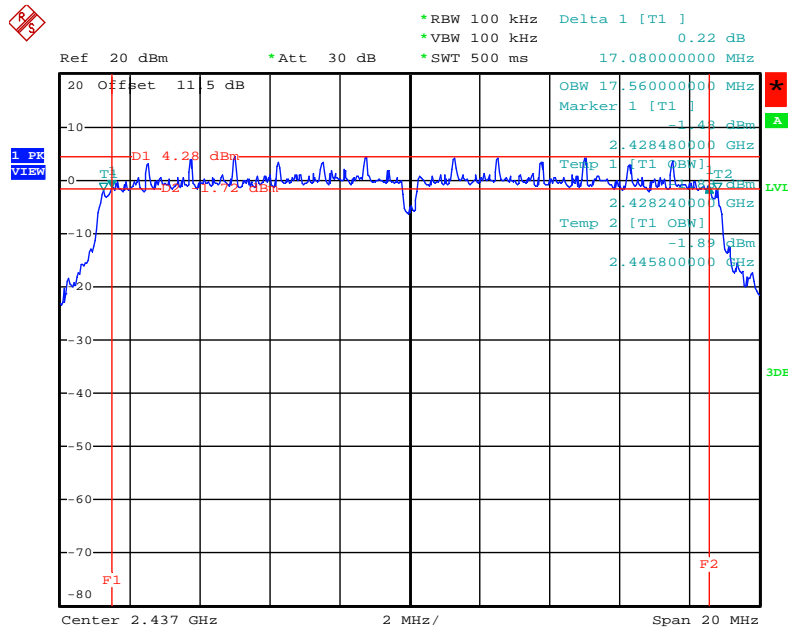

Date: 20.SEP.2010 17:00:57

**6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / 2462 MHz**

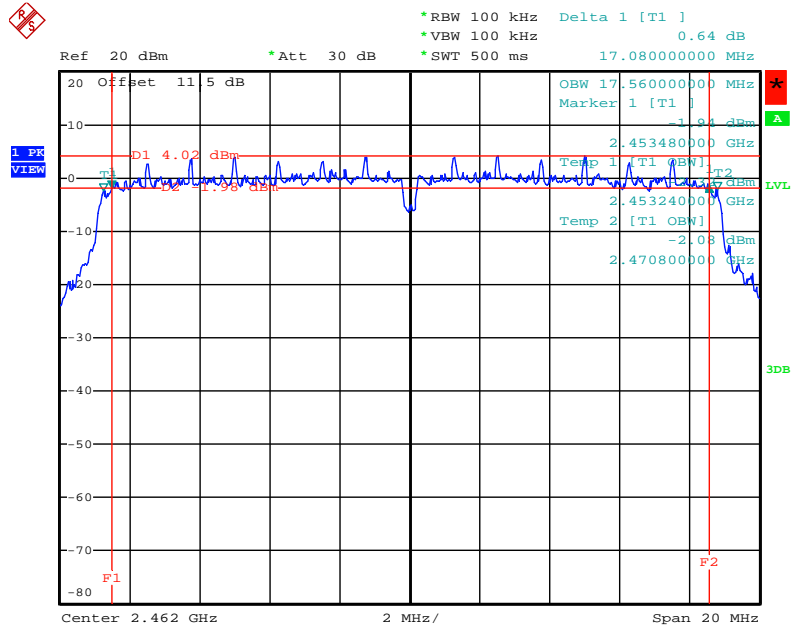

Date: 20.SEP.2010 17:04:51

**3.5. Radiated Emissions Measurement**

**3.5.1. Limit**

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emissions fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

<b>Frequencies (MHz)</b>	<b>Field Strength (micorvolts/meter)</b>	<b>Measurement Distance (meters)</b>
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

**3.5.2. Measuring Instruments and Settings**

Please refer to section 4 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

<b>Spectrum Parameter</b>	<b>Setting</b>
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100KHz / 100KHz for peak

<b>Receiver Parameter</b>	<b>Setting</b>
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP


**3.5.3. Test Procedures**

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.




3.5.4. Test Setup Layout

For radiated emissions below 30MHz

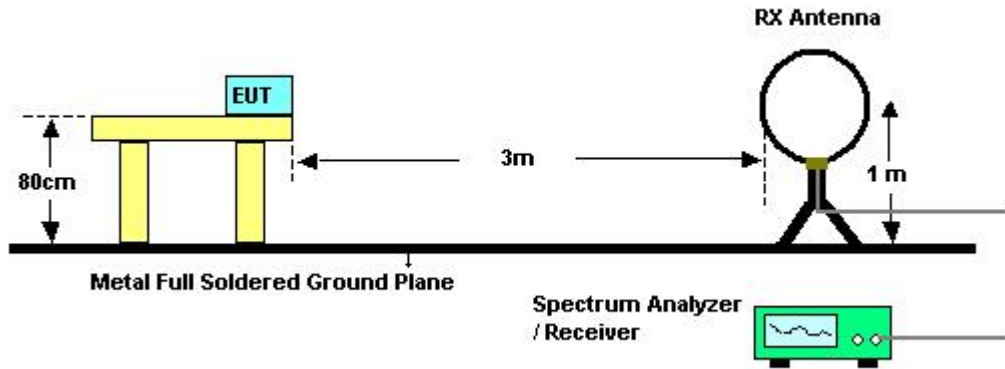

For radiated emissions above 30MHz

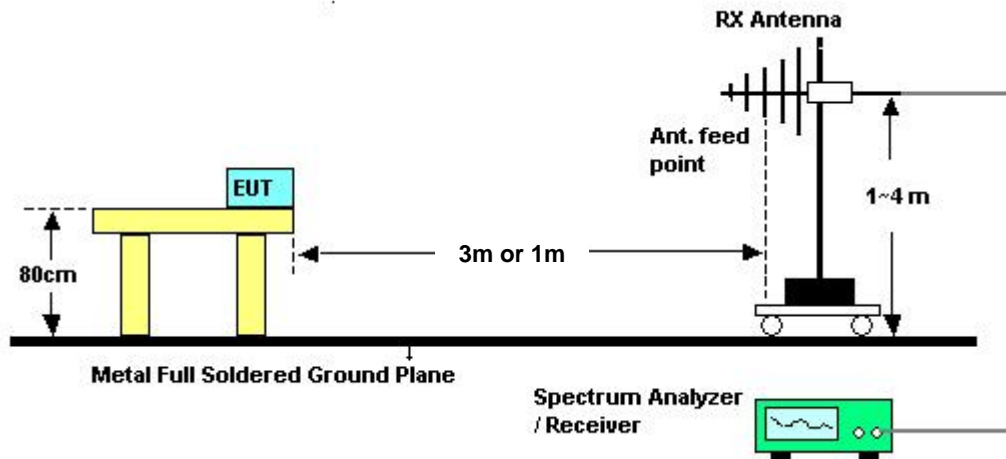

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor =  $20 \log(\text{specific distance [3m]} / \text{test distance [1m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

3.5.5. Test Deviation

There is no deviation with the original standard.

3.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

**3.5.7. Results of Radiated Emissions (9kHz~30MHz)**

<b>Test Date</b>	Oct. 19, 2010	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	26.5°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Daniel		

<b>Freq. (MHz)</b>	<b>Level (dBuV)</b>	<b>Over Limit (dB)</b>	<b>Limit Line (dBuV)</b>	<b>Remark</b>
-	-	-	-	See Note


Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

**3.5.8. Results of Radiated Emissions (30MHz~1GHz)**


<b>Test Date</b>	Oct. 19, 2010	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	26.5°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Daniel	<b>Configurations</b>	802.11g CH 6

**Horizontal**

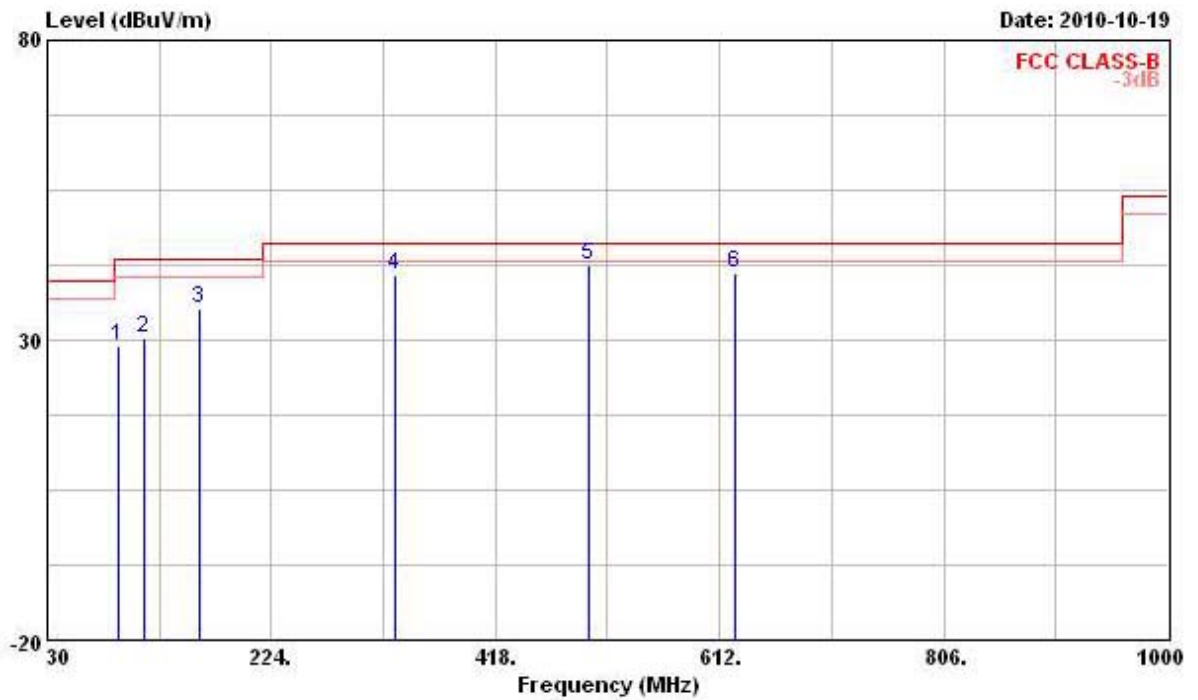

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>ReadAntenna Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
<b>1</b>	<b>91.110</b>	<b>28.97</b>	<b>-14.53</b>	<b>43.50</b>	<b>45.49</b>	<b>9.67</b>	<b>1.49</b>	<b>27.68</b>	<b>Peak</b>
<b>2</b>	<b>114.390</b>	<b>30.31</b>	<b>-13.19</b>	<b>43.50</b>	<b>43.22</b>	<b>12.92</b>	<b>1.73</b>	<b>27.56</b>	<b>Peak</b>
<b>3</b>	<b>160.950</b>	<b>35.42</b>	<b>-8.08</b>	<b>43.50</b>	<b>50.18</b>	<b>10.51</b>	<b>2.10</b>	<b>27.37</b>	<b>Peak</b>
<b>4</b>	<b>331.670</b>	<b>40.94</b>	<b>-5.06</b>	<b>46.00</b>	<b>50.81</b>	<b>14.20</b>	<b>2.97</b>	<b>27.04</b>	<b>Peak</b>
<b>5</b>	<b>498.510</b>	<b>42.62</b>	<b>-3.38</b>	<b>46.00</b>	<b>49.76</b>	<b>17.26</b>	<b>3.78</b>	<b>28.18</b>	<b>QP</b>
<b>6</b>	<b>625.580</b>	<b>41.27</b>	<b>-4.73</b>	<b>46.00</b>	<b>45.42</b>	<b>19.84</b>	<b>4.14</b>	<b>28.13</b>	<b>Peak</b>

**Vertical**

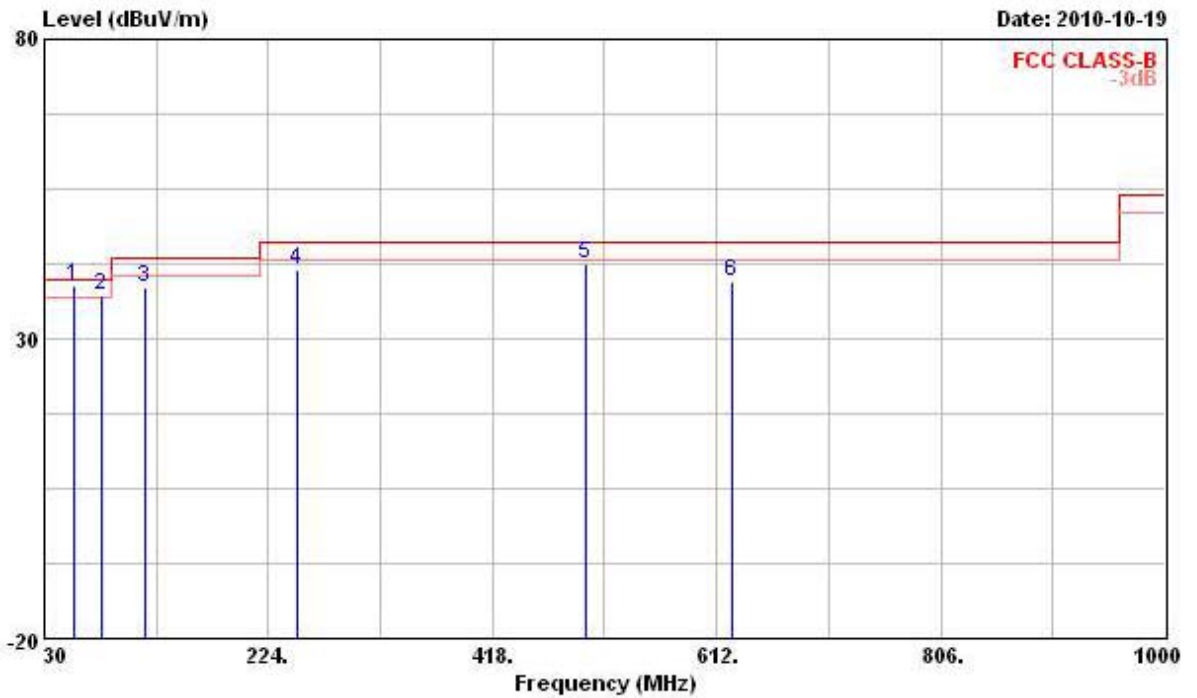

	<b>Freq</b>	<b>Level</b>	<b>Over</b>	<b>Limit</b>	<b>ReadAntenna</b>	<b>Cable</b>	<b>Preamp</b>	<b>Remark</b>
	<b>MHz</b>	<b>dBuV/m</b>	<b>dB</b>	<b>dBuV/m</b>	<b>dBuV</b>	<b>dB</b>	<b>dB</b>	
1	55.220	38.80	-1.20	40.00	57.10	8.27	1.18	27.75 QP
2	79.470	37.32	-2.68	40.00	56.25	7.37	1.41	27.71 QP
3	117.300	38.42	-5.08	43.50	50.95	13.27	1.76	27.56 Peak
4	249.220	41.49	-4.51	46.00	52.66	12.97	2.68	26.82 QP
5	498.510	42.36	-3.64	46.00	49.50	17.26	3.78	28.18 QP
6	625.580	39.59	-6.41	46.00	43.74	19.84	4.14	28.13 Peak

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBUV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

**3.5.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)**

<b>Test Date</b>	Oct. 11, 2010	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	26.5°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Daniel	<b>Configurations</b>	802.11b CH 1


**Horizontal**

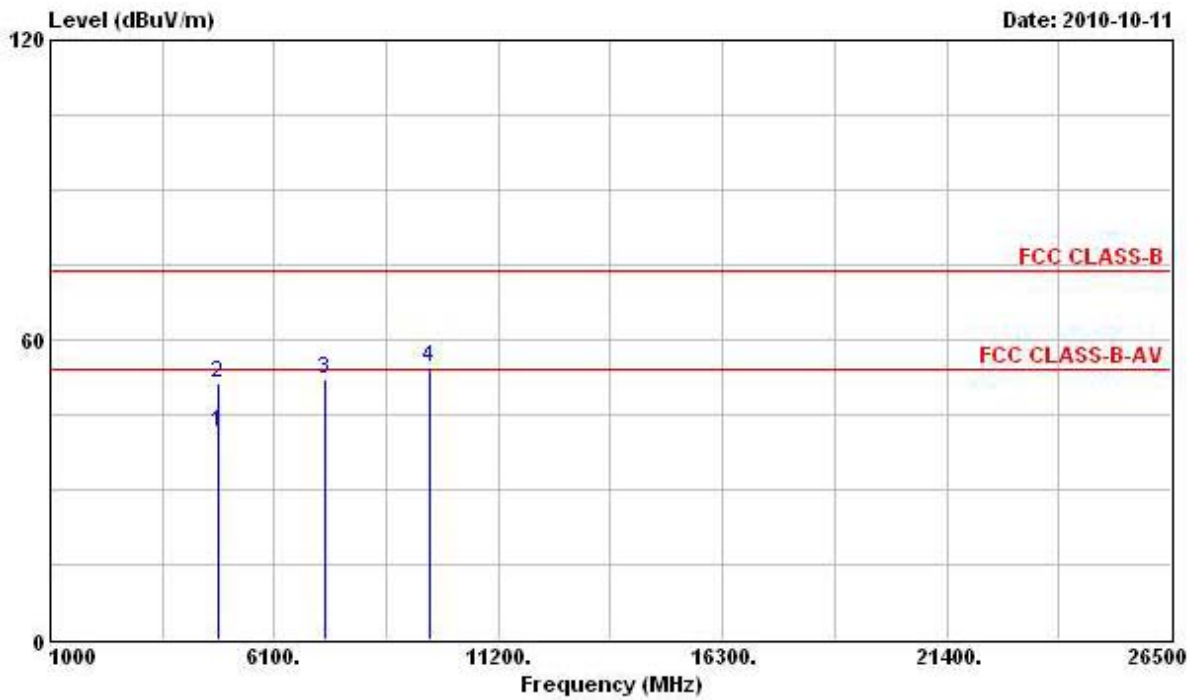

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	
1	4824.000	41.46	-12.54	54.00	35.63	35.76	4.58	34.51	Average
2	4824.000	51.31	-22.69	74.00	45.48	35.76	4.58	34.51	Peak
3	7236.000	51.92			42.73	37.85	5.63	34.29	Peak
4	9648.000	54.56			43.46	39.39	6.34	34.63	Peak

Note: Item 3 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

**Vertical**

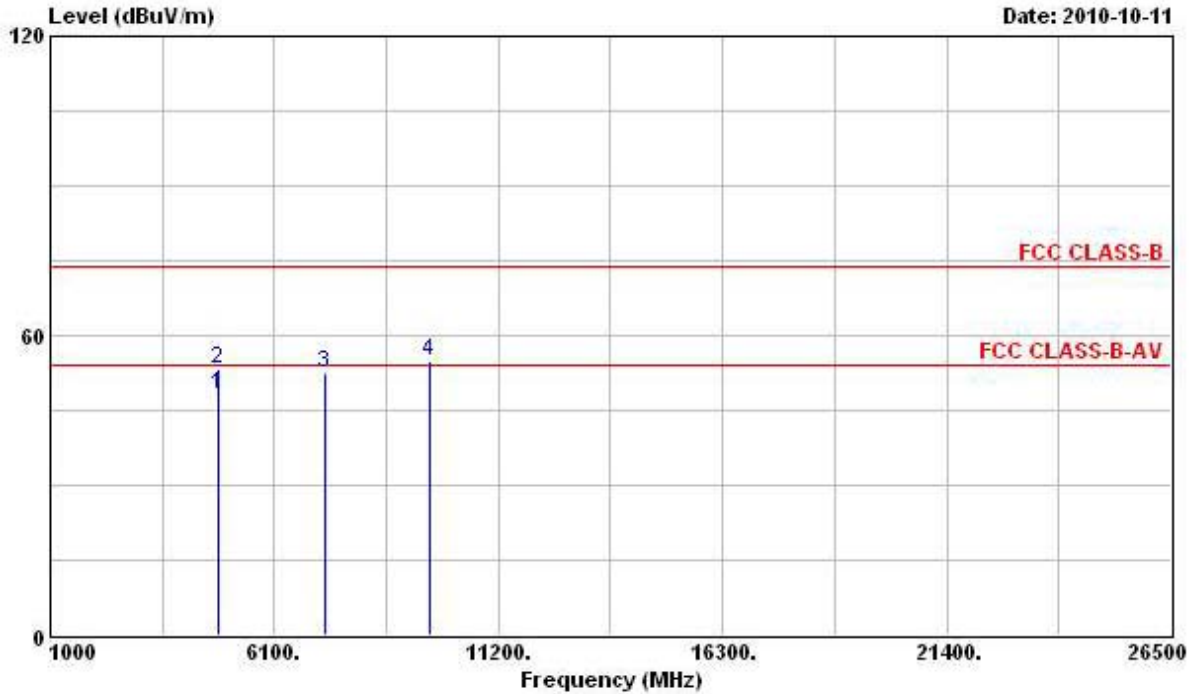


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4824.000	48.29	-5.71	54.00	43.09	35.13	4.58	34.51	Average
2	4824.000	53.34	-20.66	74.00	48.14	35.13	4.58	34.51	Peak
3	7236.000	52.57			44.33	36.90	5.63	34.29	Peak
4	9648.000	54.67			44.37	38.59	6.34	34.63	Peak

Note: Item 3 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

<b>Test Date</b>	Oct. 11, 2010	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	26.5°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Daniel	<b>Configurations</b>	802.11b CH 6


**Horizontal**

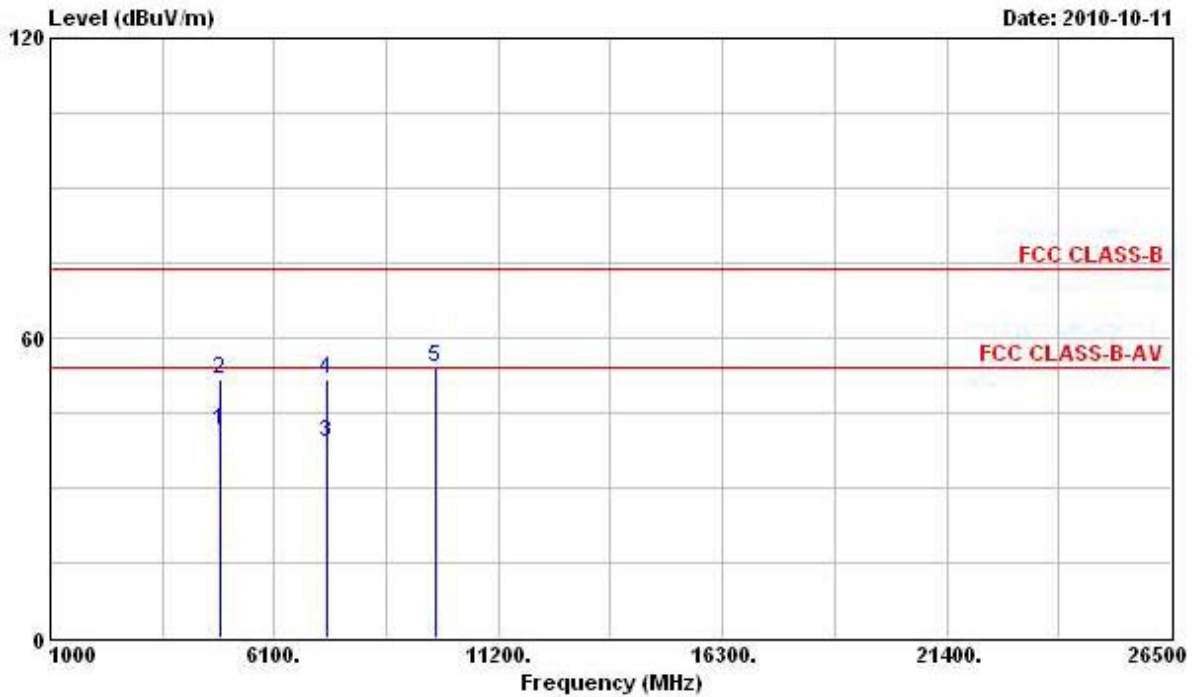

	<b>Freq</b>	<b>Level</b>	<b>Over</b>	<b>Limit</b>	<b>ReadAntenna</b>	<b>Cable</b>	<b>Preamp</b>	<b>Remark</b>
	<b>MHz</b>	<b>dBuV/m</b>	<b>Limit</b>	<b>Line</b>	<b>Level</b>	<b>Loss</b>	<b>Factor</b>	
			<b>dB</b>	<b>dBuV/m</b>	<b>dBuV</b>	<b>dB</b>	<b>dB</b>	
<b>1</b>	<b>4874.000</b>	<b>41.47</b>	<b>-12.53</b>	<b>54.00</b>	<b>35.48</b>	<b>35.83</b>	<b>4.61</b>	<b>34.45 Average</b>
<b>2</b>	<b>4874.000</b>	<b>51.72</b>	<b>-22.28</b>	<b>74.00</b>	<b>45.73</b>	<b>35.83</b>	<b>4.61</b>	<b>34.45 Peak</b>
<b>3</b>	<b>7311.000</b>	<b>38.89</b>	<b>-15.11</b>	<b>54.00</b>	<b>29.68</b>	<b>37.86</b>	<b>5.64</b>	<b>34.29 Average</b>
<b>4</b>	<b>7311.000</b>	<b>51.88</b>	<b>-22.12</b>	<b>74.00</b>	<b>42.67</b>	<b>37.86</b>	<b>5.64</b>	<b>34.29 Peak</b>
<b>5</b>	<b>9748.000</b>	<b>54.05</b>			<b>42.76</b>	<b>39.51</b>	<b>6.36</b>	<b>34.58 Peak</b>

Note: An item 5 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

**Vertical**

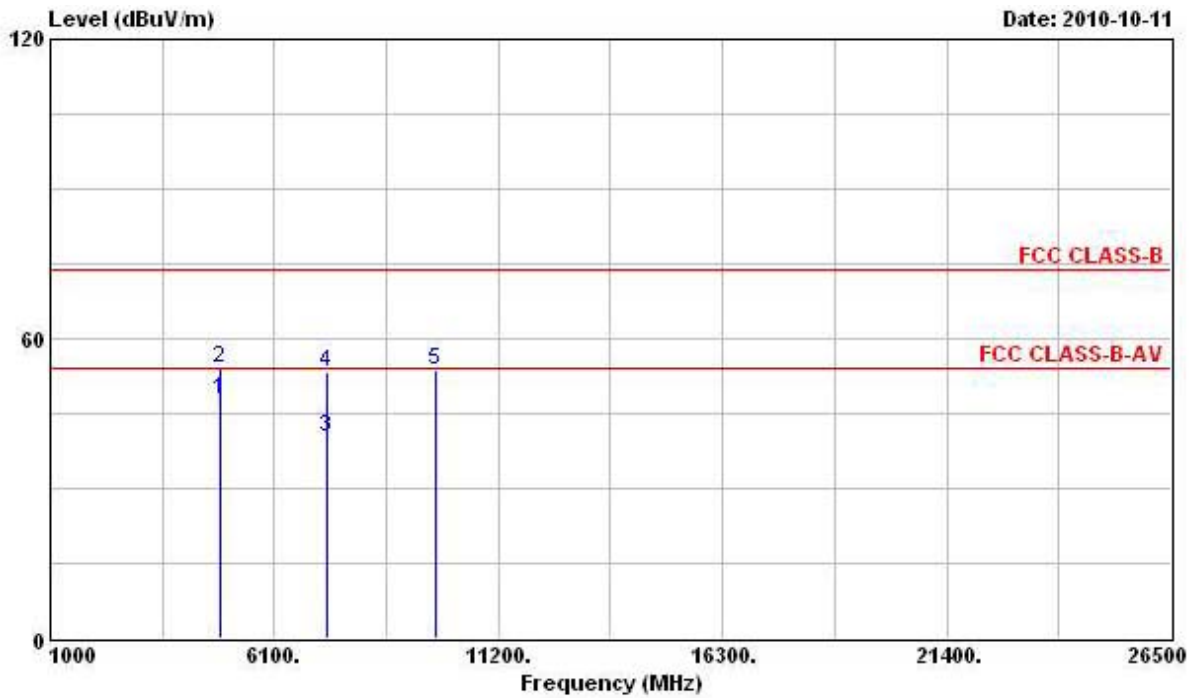


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4874.000	47.82	-6.18	54.00	42.48	35.18	4.61	34.45	Average
2	4874.000	54.10	-19.90	74.00	48.76	35.18	4.61	34.45	Peak
3	7311.000	40.42	-13.58	54.00	32.15	36.92	5.64	34.29	Average
4	7311.000	53.34	-20.66	74.00	45.07	36.92	5.64	34.29	Peak
5	9748.000	53.54			43.05	38.71	6.36	34.58	Peak

Note: An item 5 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).



<b>Test Date</b>	Oct. 11, 2010	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	26.5°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Daniel	<b>Configurations</b>	802.11b CH 11


**Horizontal**

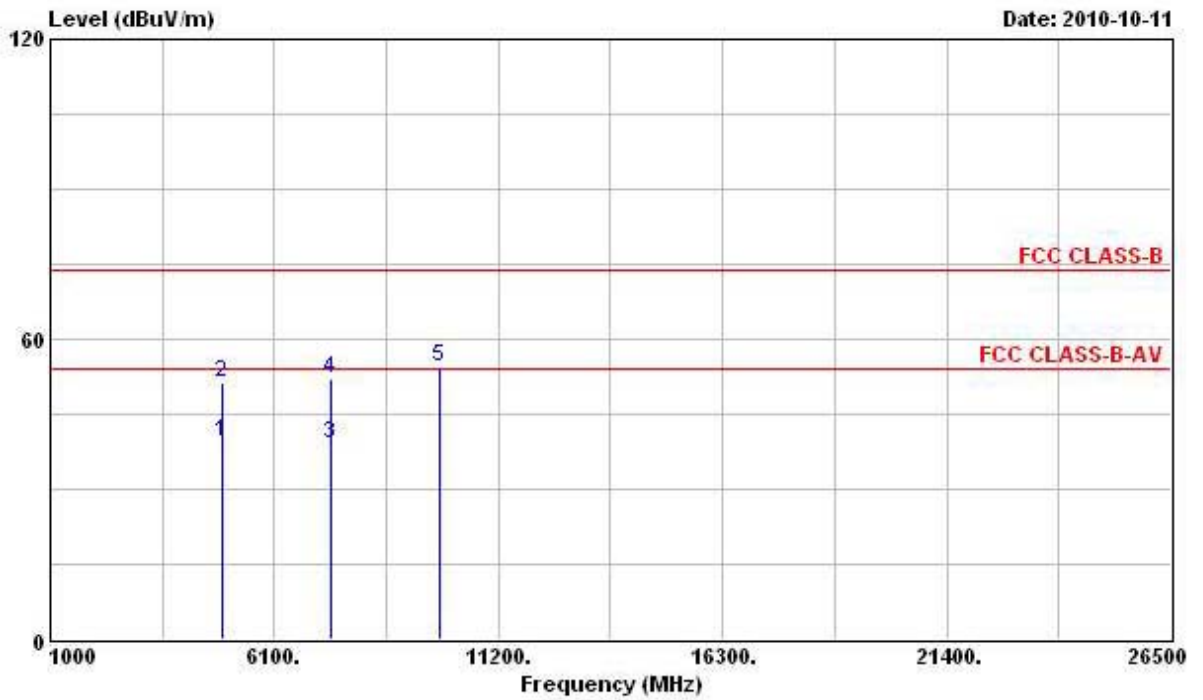

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4924.000	39.65	-14.35	54.00	33.45	35.90	4.68	34.38 Average
2	4924.000	51.46	-22.54	74.00	45.26	35.90	4.68	34.38 Peak
3	7386.000	38.93	-15.07	54.00	29.69	37.88	5.65	34.29 Average
4	7386.000	51.93	-22.07	74.00	42.69	37.88	5.65	34.29 Peak
5	9848.000	54.37			42.92	39.61	6.38	34.54 Peak

Note: Item 5 is on un-restricted band, so the limit is -20dBc for the field strength of the fundamental emissions (see section 3.6.7).

**Vertical**

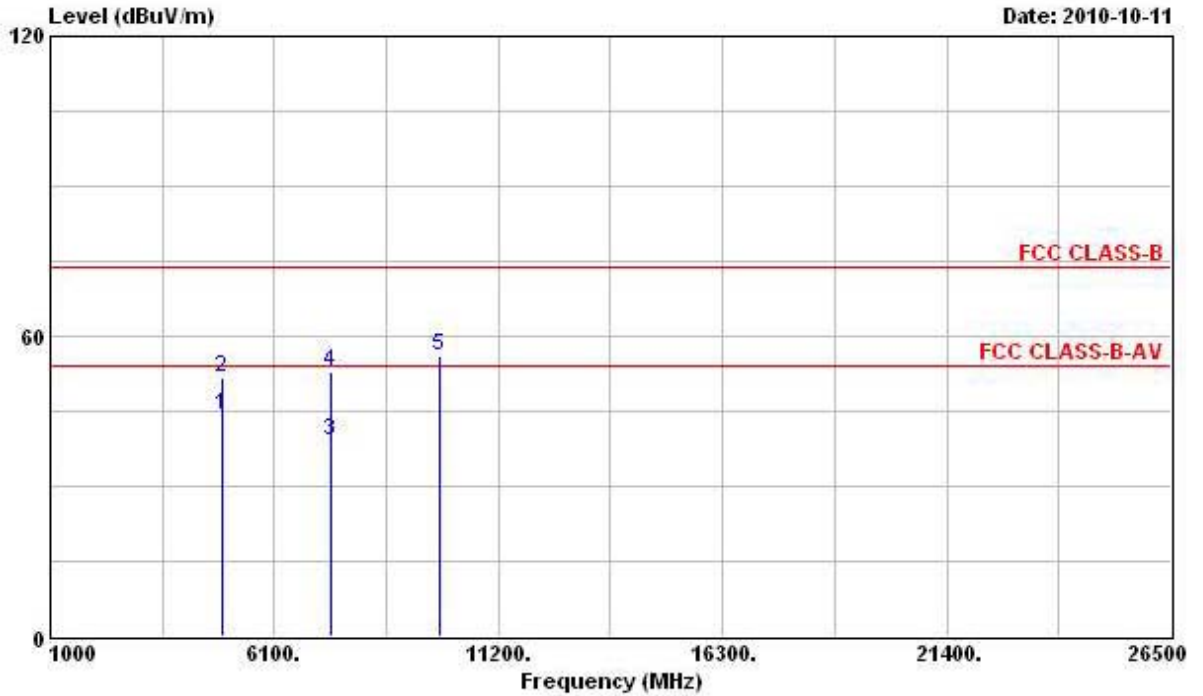


	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>ReadAntenna Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4924.000	44.08	-9.92	54.00	38.55	35.23	4.68	34.38	Average
2	4924.000	51.65	-22.35	74.00	46.12	35.23	4.68	34.38	Peak
3	7386.000	39.20	-14.80	54.00	30.88	36.96	5.65	34.29	Average
4	7386.000	53.07	-20.93	74.00	44.75	36.96	5.65	34.29	Peak
5	9848.000	55.95			45.30	38.81	6.38	34.54	Peak

Note: An item 5 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

<b>Test Date</b>	Oct. 11, 2010	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	26.5°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Daniel	<b>Configurations</b>	802.11g CH 1


**Horizontal**

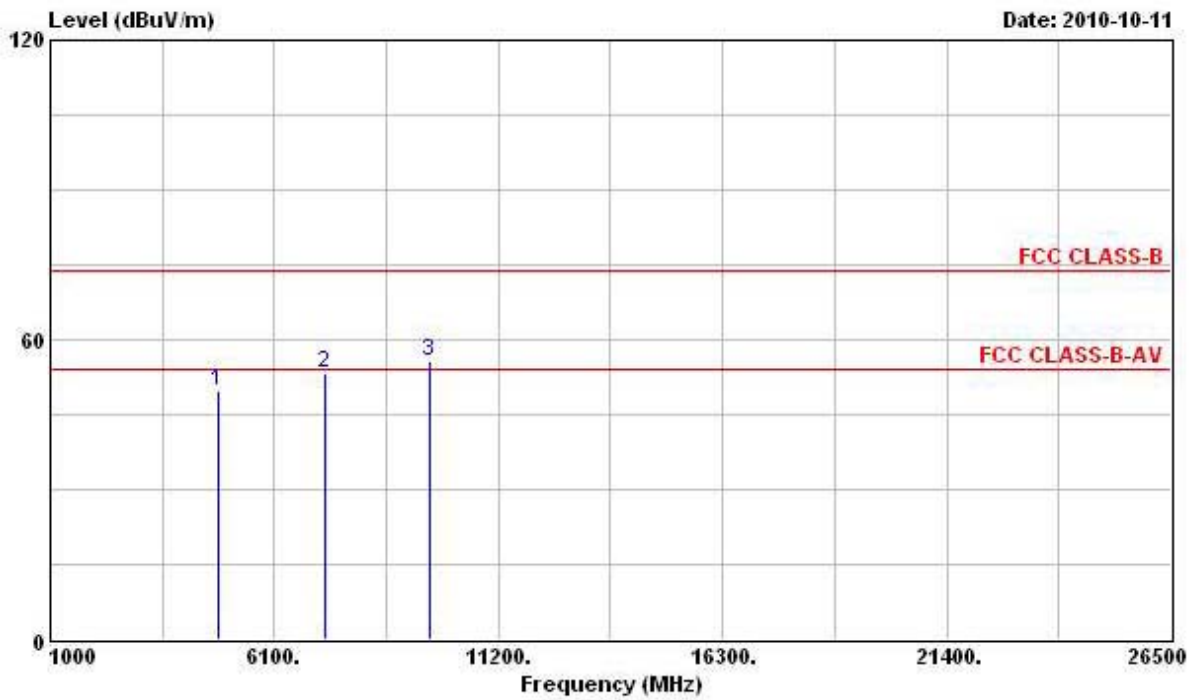

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>ReadAntenna Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
<b>1</b>	<b>4824.000</b>	<b>49.75</b>	<b>-4.25</b>	<b>54.00</b>	<b>43.92</b>	<b>35.76</b>	<b>4.58</b>	<b>34.51</b>	<b>PK</b>
<b>2</b>	<b>7236.000</b>	<b>53.22</b>			<b>44.03</b>	<b>37.85</b>	<b>5.63</b>	<b>34.29</b>	<b>Peak</b>
<b>3</b>	<b>9648.000</b>	<b>55.81</b>			<b>44.71</b>	<b>39.39</b>	<b>6.34</b>	<b>34.63</b>	<b>Peak</b>

Note: Item 2 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

**Vertical**

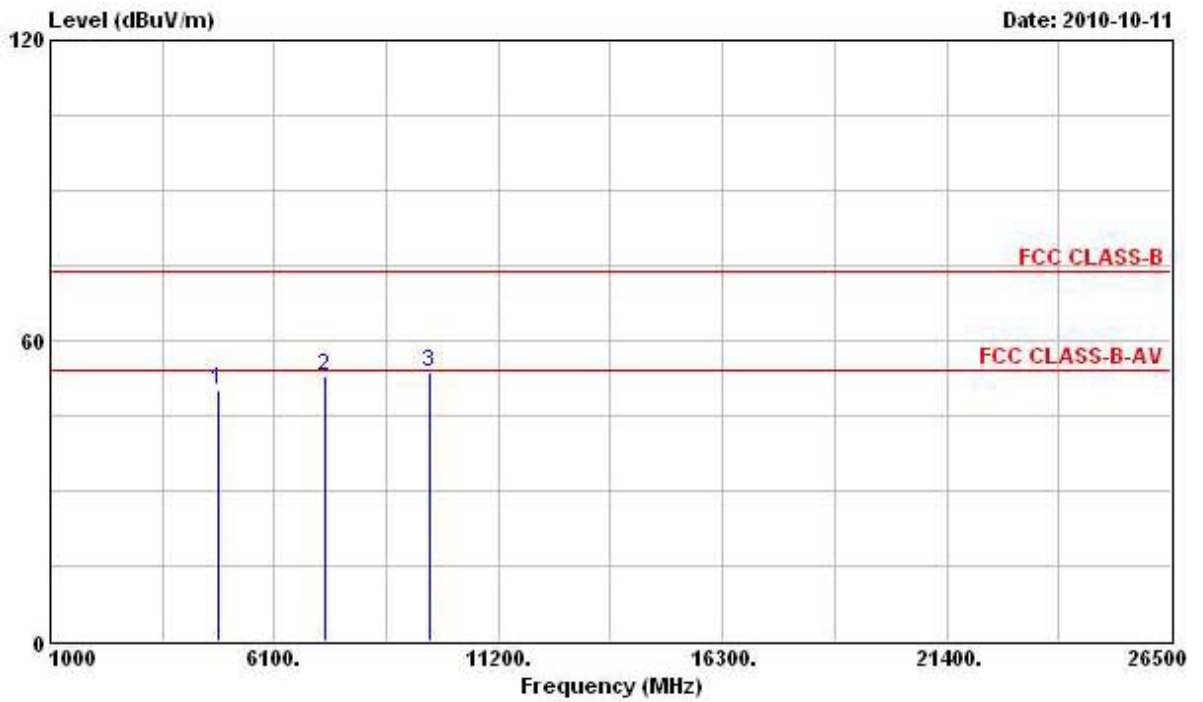


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	4824.000	49.99	-4.01	54.00	44.79	35.13	4.58	34.51	PK
2	7236.000	53.03			44.79	36.90	5.63	34.29	Peak
3	9648.000	53.54			43.24	38.59	6.34	34.63	Peak

Note: Item 2 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

<b>Test Date</b>	Oct. 11, 2010	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	26.5°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Daniel	<b>Configurations</b>	802.11g CH 6


**Horizontal**

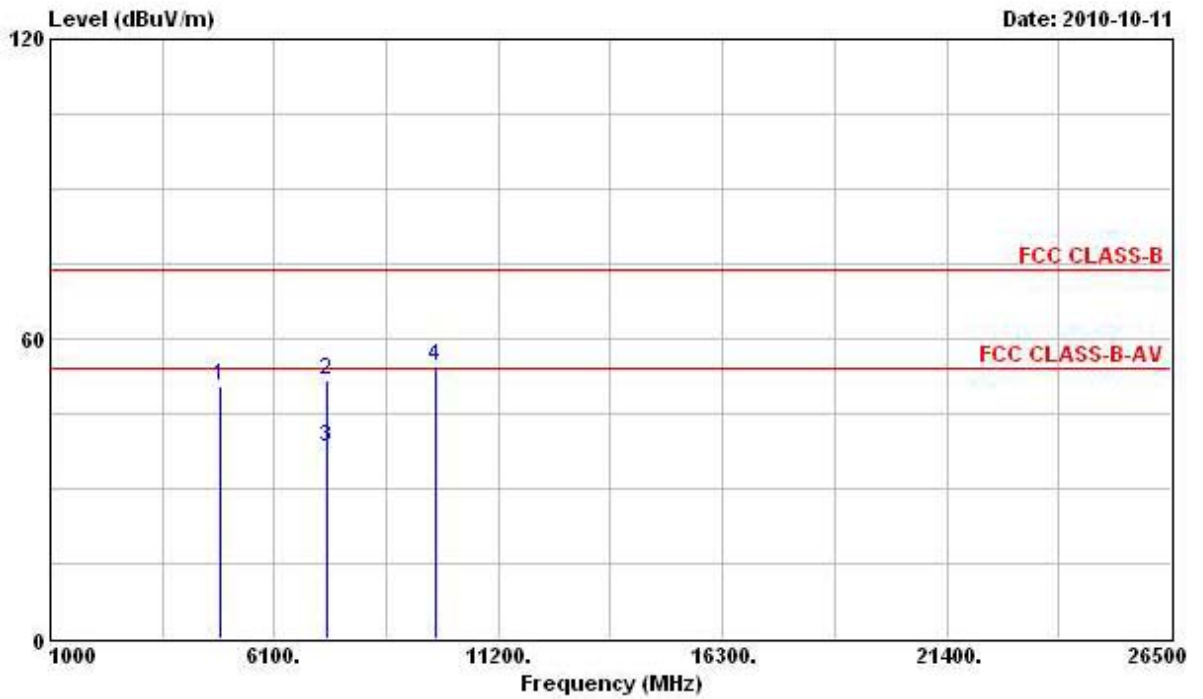

	<b>Freq</b>	<b>Level</b>	<b>Over</b>	<b>Limit</b>	<b>ReadAntenna</b>	<b>Cable</b>	<b>Preamp</b>	<b>Remark</b>
	<b>MHz</b>	<b>dBuV/m</b>	<b>Limit</b>	<b>Line</b>	<b>Level</b>	<b>Loss</b>	<b>Factor</b>	
			<b>dB</b>	<b>dBuV/m</b>	<b>dBuV</b>	<b>dB/m</b>	<b>dB</b>	<b>dB</b>
<b>1</b>	<b>@ 4874.000</b>	<b>50.51</b>	<b>-3.49</b>	<b>54.00</b>	<b>44.52</b>	<b>35.83</b>	<b>4.61</b>	<b>34.45 pk</b>
<b>2</b>	<b>7311.000</b>	<b>51.61</b>	<b>-22.39</b>	<b>74.00</b>	<b>42.40</b>	<b>37.86</b>	<b>5.64</b>	<b>34.29 Peak</b>
<b>3</b>	<b>7311.000</b>	<b>38.37</b>	<b>-15.63</b>	<b>54.00</b>	<b>29.16</b>	<b>37.86</b>	<b>5.64</b>	<b>34.29 Average</b>
<b>4</b>	<b>9748.000</b>	<b>54.31</b>			<b>43.02</b>	<b>39.51</b>	<b>6.36</b>	<b>34.58 Peak</b>

Note: An item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

**Vertical**

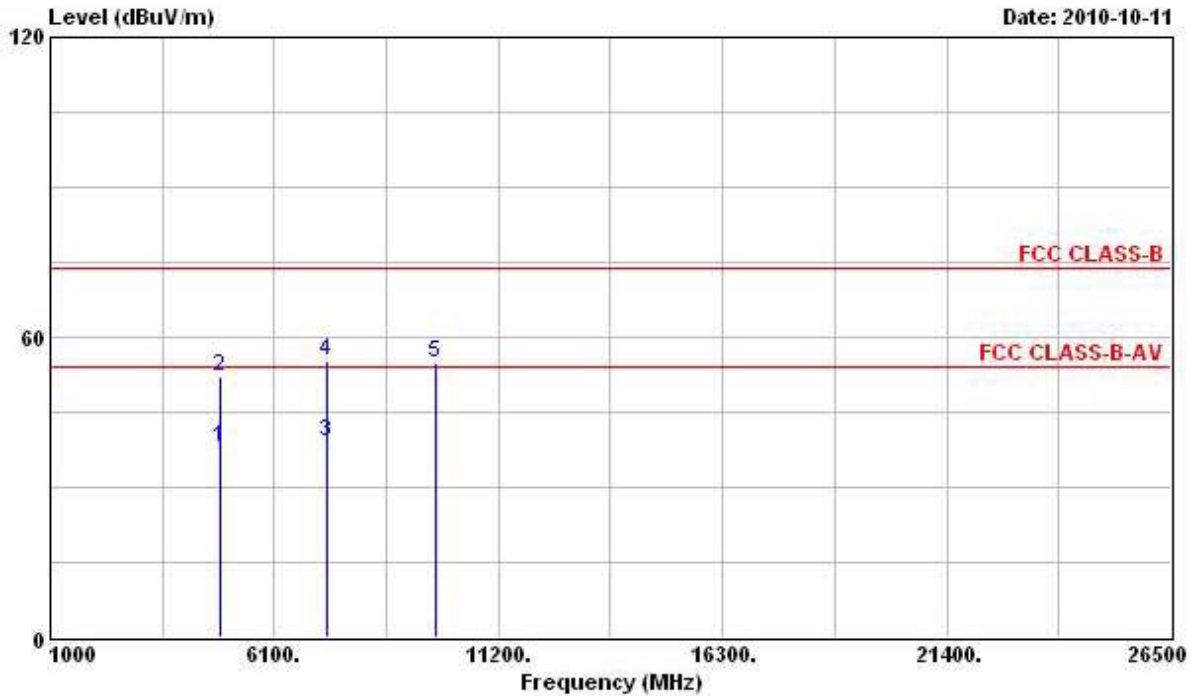


	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>ReadAntenna Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4874.000	37.83	-16.17	54.00	32.49	35.18	4.61	34.45	Average
2	4874.000	51.91	-22.09	74.00	46.57	35.18	4.61	34.45	Peak
3	7311.000	39.05	-14.95	54.00	30.78	36.92	5.64	34.29	Average
4	7311.000	55.16	-18.84	74.00	46.89	36.92	5.64	34.29	Peak
5	9748.000	54.80			44.31	38.71	6.36	34.58	Peak

Note: An item 5 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Test Date	Oct. 11, 2010	Test Site No.	03CH02-HY
Temperature	26.5°C	Humidity	54%
Test Engineer	Daniel	Configurations	802.11g CH 11


**Horizontal**

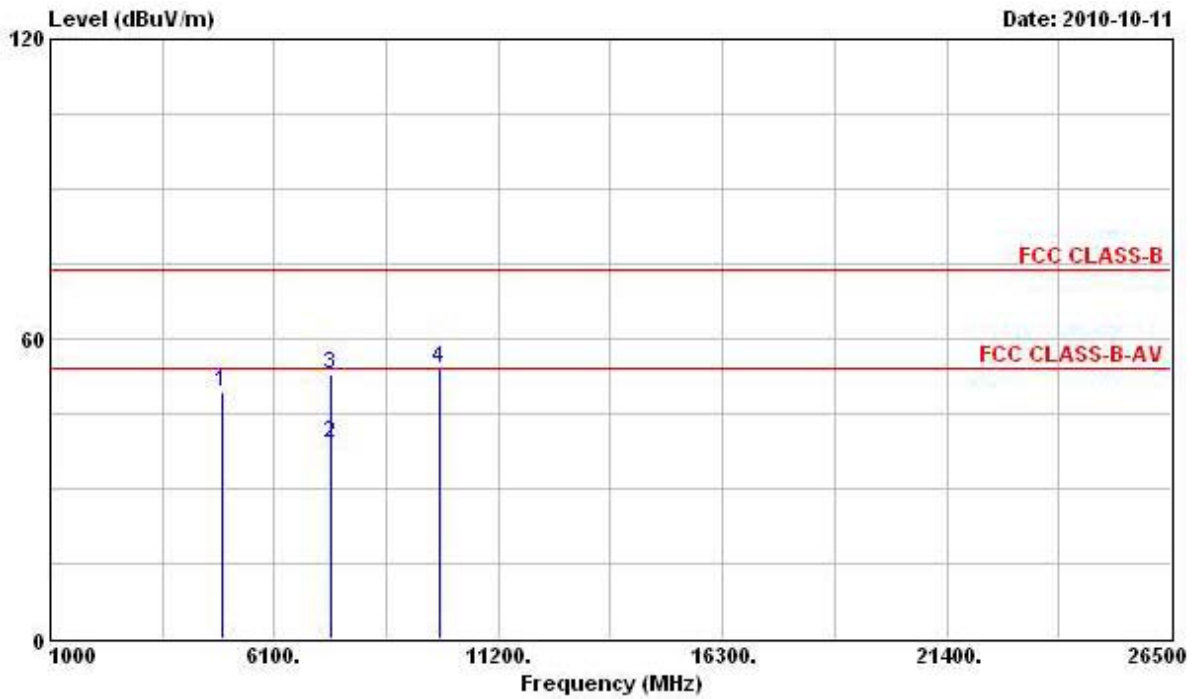

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @ 4924.000	49.26	-4.74	54.00	43.06	35.90	4.68	34.38	pk
2 7386.000	39.22	-14.78	54.00	29.98	37.88	5.65	34.29	Average
3 7386.000	52.86	-21.14	74.00	43.62	37.88	5.65	34.29	Peak
4 9848.000	54.21			42.76	39.61	6.38	34.54	Peak

Note: An item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

**Vertical**

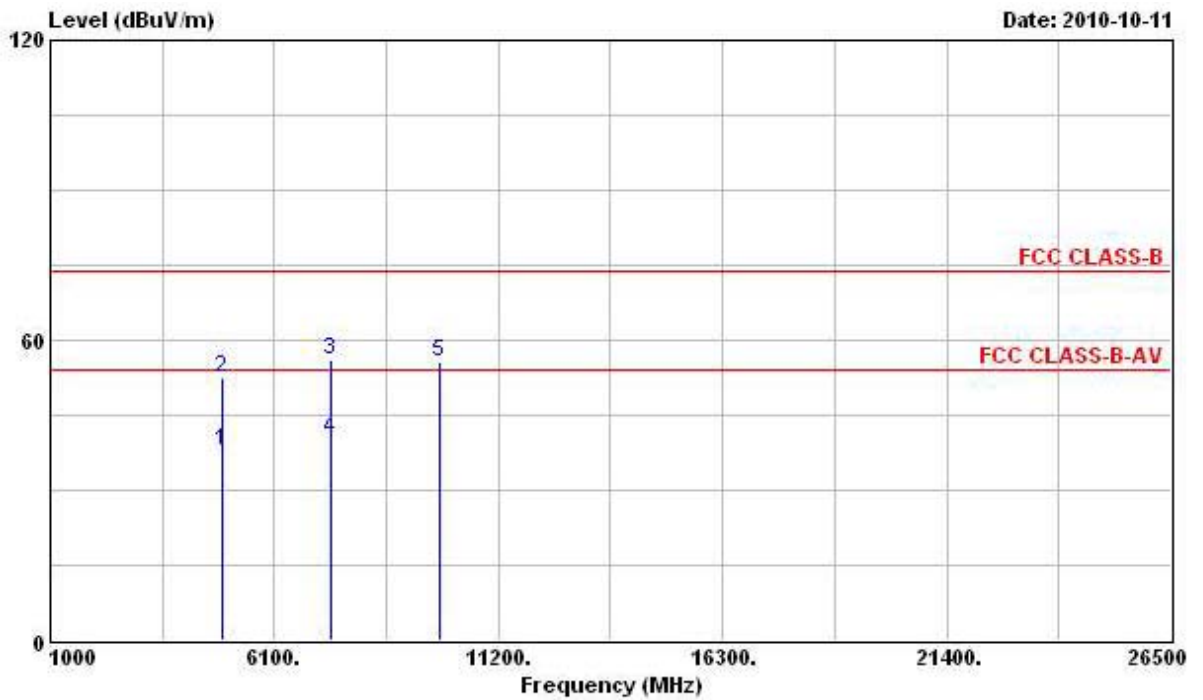


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4924.000	37.83	-16.17	54.00	32.30	35.23	4.68	34.38	Average
2	4924.000	52.60	-21.40	74.00	47.07	35.23	4.68	34.38	Peak
3	7386.000	55.90	-18.10	74.00	47.58	36.96	5.65	34.29	Peak
4	7386.000	40.17	-13.83	54.00	31.85	36.96	5.65	34.29	Average
5	9848.000	55.58			44.93	38.81	6.38	34.54	Peak

Note: An item 5 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).



Test Date	Oct. 11, 2010	Test Site No.	03CH02-HY
Temperature	26.5°C	Humidity	54%
Test Engineer	Daniel	Configurations	MCS0 20MHz Ch 1


**Horizontal**

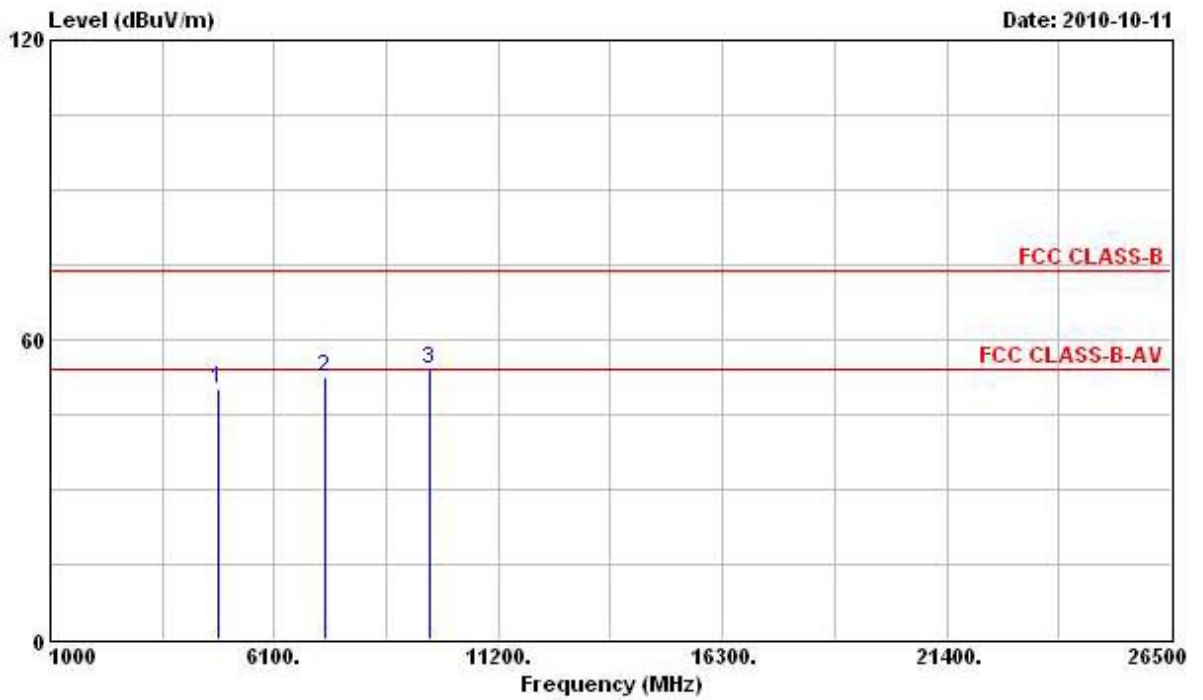

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @ 4824.000	50.32	-3.68	54.00	44.49	35.76	4.58	34.51	pk
2 7236.000	52.69			43.50	37.85	5.63	34.29	Peak
3 9648.000	53.89			42.79	39.39	6.34	34.63	Peak

Note: Item 2 and 3 are on un-restricted band, so the limit is -20dBc for the field strength of the fundamental emissions (see section 3.6.7).

**Vertical**

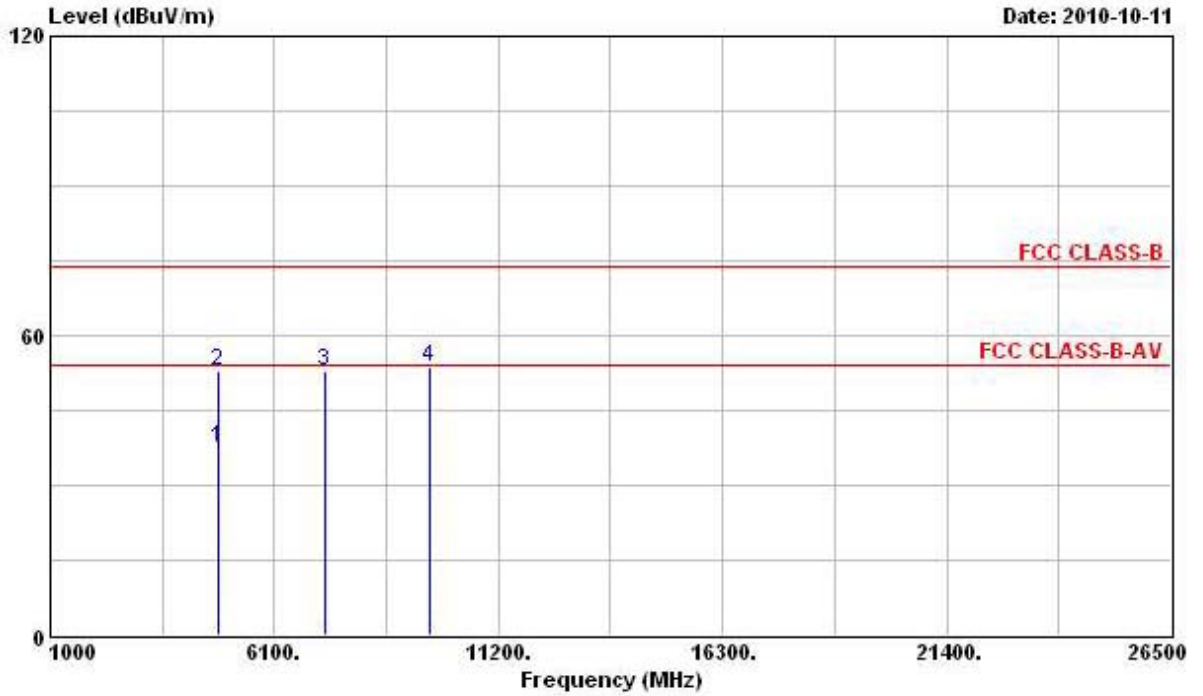


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4824.000	37.58	-16.42	54.00	32.38	35.13	4.58	34.51	Average
2	4824.000	52.97	-21.03	74.00	47.77	35.13	4.58	34.51	Peak
3	7236.000	53.00			44.76	36.90	5.63	34.29	Peak
4	9648.000	53.84			43.54	38.59	6.34	34.63	Peak

Note: Item 3 and 4 are on un-restricted band, so the limit is -20dBc for the field strength of the fundamental emissions (see section 3.6.7).

Test Date	Oct. 11, 2010	Test Site No.	03CH02-HY
Temperature	26.5°C	Humidity	54%
Test Engineer	Daniel	Configurations	MCS0 20MHz Ch 6


**Horizontal**

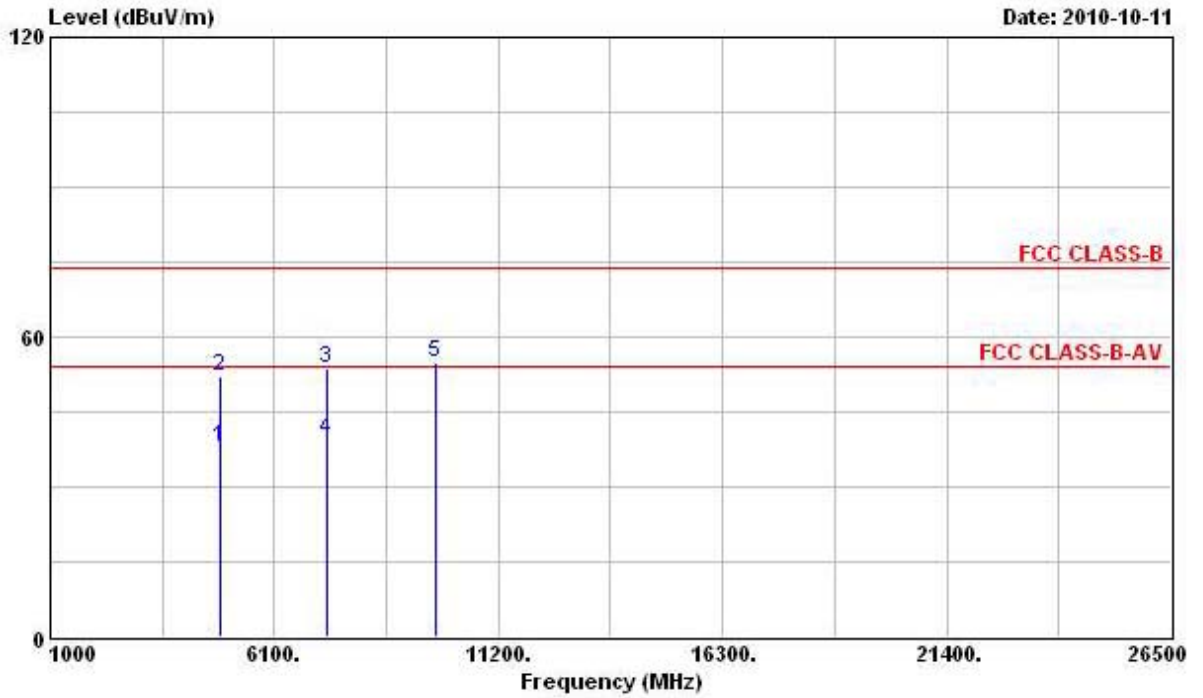

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4874.000	37.81	-16.19	54.00	31.82	35.83	4.61	34.45	Average
2	4874.000	52.21	-21.79	74.00	46.22	35.83	4.61	34.45	Peak
3	7311.000	53.65	-20.35	74.00	44.44	37.86	5.64	34.29	Peak
4	7311.000	39.44	-14.56	54.00	30.23	37.86	5.64	34.29	Average
5	9748.000	55.02			43.73	39.51	6.36	34.58	Peak

Note: Item 5 is on un-restricted band, so the limit is -20dBc for the field strength of the fundamental emissions (see section 3.6.7).

**Vertical**

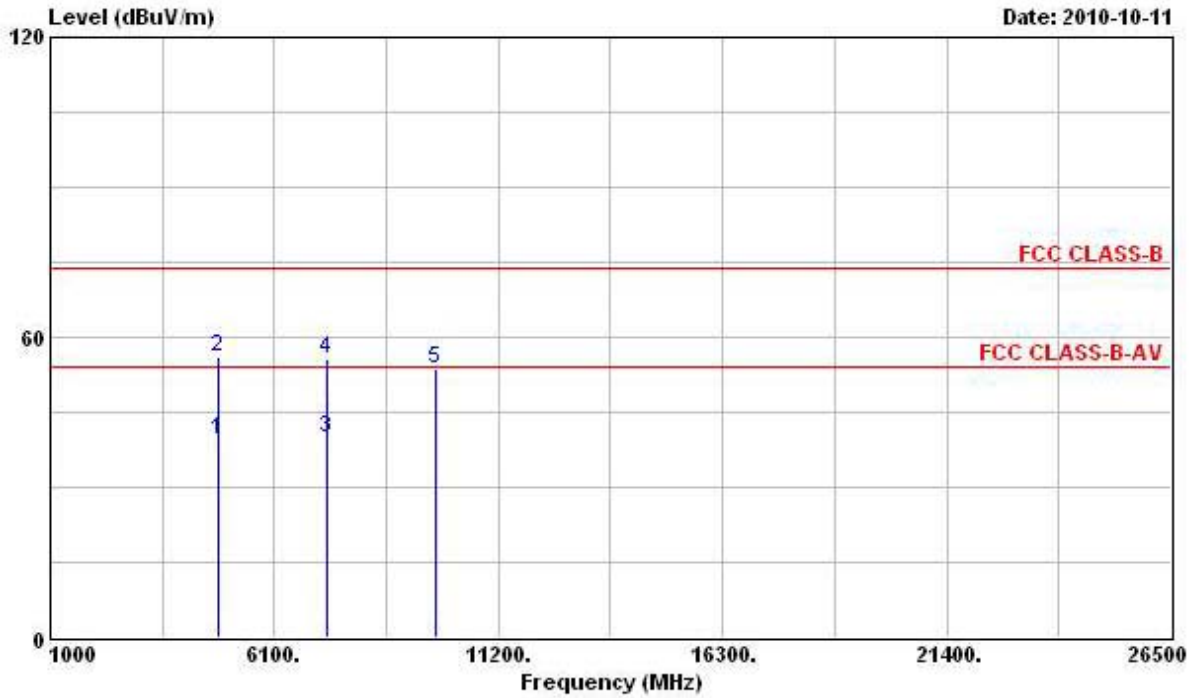


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4824.000	39.43	-14.57	54.00	34.23	35.13	4.58	34.51	Average
2	4824.000	56.24	-17.76	74.00	51.04	35.13	4.58	34.51	Peak
3	7311.000	39.70	-14.30	54.00	31.43	36.92	5.64	34.29	Average
4	7311.000	55.51	-18.49	74.00	47.24	36.92	5.64	34.29	Peak
5	9748.000	53.69			43.20	38.71	6.36	34.58	Peak

Note: Item 5 is on un-restricted band, so the limit is -20dBc for the field strength of the fundamental emissions (see section 3.6.7).

Test Date	Oct. 11, 2010	Test Site No.	03CH02-HY
Temperature	26.5°C	Humidity	54%
Test Engineer	Daniel	Configurations	MCS0 20MHz Ch 11


**Horizontal**

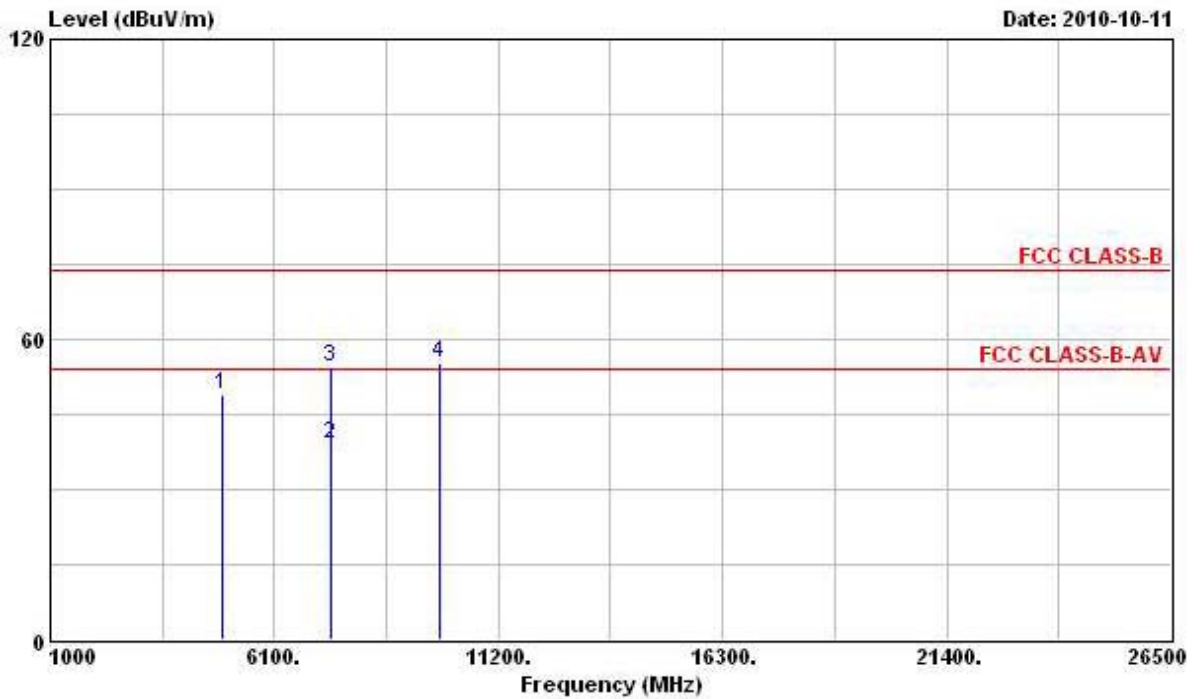

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4924.000	48.99	-5.01	54.00	42.79	35.90	4.68	34.38	pk
2	7386.000	39.15	-14.85	54.00	29.91	37.88	5.65	34.29	Average
3	7386.000	54.43	-19.57	74.00	45.19	37.88	5.65	34.29	Peak
4	9848.000	55.40			43.95	39.61	6.38	34.54	Peak

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of the fundamental emissions (see section 3.6.7).

**Vertical**

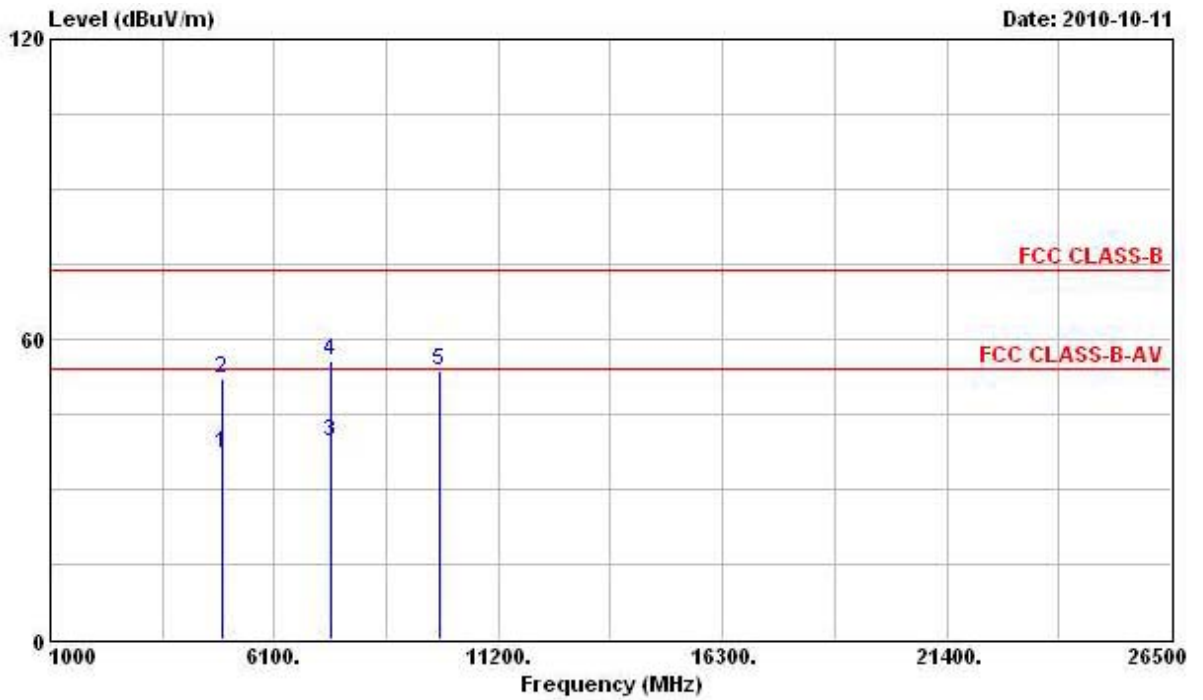

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4924.000	37.19	-16.81	54.00	31.66	35.23	4.68	34.38	Average
2	4924.000	52.24	-21.76	74.00	46.71	35.23	4.68	34.38	Peak
3	7386.000	39.43	-14.57	54.00	31.11	36.96	5.65	34.29	Average
4	7386.000	55.83	-18.17	74.00	47.51	36.96	5.65	34.29	Peak
5	9848.000	53.77			43.12	38.81	6.38	34.54	Peak

Note: Item 5 is on un-restricted band, so the limit is -20dBc for the field strength of the fundamental emissions (see section 3.6.7).

**3.6. Band Edge Emissions Measurement**

**3.6.1. Limit**

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

<b>Frequencies (MHz)</b>	<b>Field Strength (micorvolts/meter)</b>	<b>Measurement Distance (meters)</b>
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

**3.6.2. Measuring Instruments and Setting**

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

<b>Spectrum Parameter</b>	<b>Setting</b>
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 KHz /100 KHz for Peak

**3.6.3. Test Procedures**

1. The test procedure is the same as section 3.5.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

**3.6.4. Test Setup Layout**

This test setup layout is the same as that shown in section 3.5.4.

**3.6.5. Test Deviation**

There is no deviation with the original standard.

**3.6.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.6.7. Test Result of Band Edge Emissions**

<b>Test Date</b>	Oct. 11, 2010	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	26.5°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Daniel	<b>Configurations</b>	802.11b CH 1, 6, 11

**Channel 1**

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>ReadAntenna Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	<b>MHz</b>	<b>dBuV/m</b>	<b>dB</b>	<b>dBuV/m</b>	<b>dBuV</b>	<b>dB/m</b>	<b>dB</b>	<b>dB</b>	
<b>1</b>	<b>2356.930</b>	<b>62.66</b>	<b>-11.34</b>	<b>74.00</b>	<b>27.77</b>	<b>31.90</b>	<b>2.99</b>	<b>0.00</b>	<b>Peak</b>
<b>2 @</b>	<b>2410.700</b>	<b>115.61</b>			<b>80.50</b>	<b>32.09</b>	<b>3.02</b>	<b>0.00</b>	<b>Peak</b>
<b>1 @</b>	<b>2389.990</b>	<b>49.92</b>	<b>-4.08</b>	<b>54.00</b>	<b>14.87</b>	<b>32.03</b>	<b>3.02</b>	<b>0.00</b>	<b>Average</b>
<b>2 @</b>	<b>2411.460</b>	<b>110.28</b>			<b>75.17</b>	<b>32.09</b>	<b>3.02</b>	<b>0.00</b>	<b>Average</b>

Item 2 is Fundamental Emissions.

**Channel 6**

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>ReadAntenna Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	<b>MHz</b>	<b>dBuV/m</b>	<b>dB</b>	<b>dBuV/m</b>	<b>dBuV</b>	<b>dB/m</b>	<b>dB</b>	<b>dB</b>	
<b>1 @</b>	<b>2436.540</b>	<b>107.52</b>			<b>72.26</b>	<b>32.21</b>	<b>3.05</b>	<b>0.00</b>	<b>Average</b>
<b>1 @</b>	<b>2438.060</b>	<b>112.06</b>			<b>76.80</b>	<b>32.21</b>	<b>3.05</b>	<b>0.00</b>	<b>Peak</b>

An item 1 is Fundamental Emissions.

**Channel 11**

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>ReadAntenna Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	<b>MHz</b>	<b>dBuV/m</b>	<b>dB</b>	<b>dBuV/m</b>	<b>dBuV</b>	<b>dB/m</b>	<b>dB</b>	<b>dB</b>	
<b>1 @</b>	<b>2463.330</b>	<b>115.85</b>			<b>80.49</b>	<b>32.28</b>	<b>3.08</b>	<b>0.00</b>	<b>Peak</b>
<b>2</b>	<b>2483.500</b>	<b>63.75</b>	<b>-10.25</b>	<b>74.00</b>	<b>28.33</b>	<b>32.34</b>	<b>3.08</b>	<b>0.00</b>	<b>Peak</b>
<b>1 @</b>	<b>2462.570</b>	<b>110.22</b>			<b>74.86</b>	<b>32.28</b>	<b>3.08</b>	<b>0.00</b>	<b>Average</b>
<b>2 @</b>	<b>2483.850</b>	<b>52.24</b>	<b>-1.76</b>	<b>54.00</b>	<b>16.82</b>	<b>32.34</b>	<b>3.08</b>	<b>0.00</b>	<b>Average</b>

Item 1 is Fundamental Emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



<b>Test Date</b>	Oct. 11, 2010	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	26.5°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Daniel	<b>Configurations</b>	802.11g CH 1, 6, 11

**Channel 1**

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>Read Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	2389.990	52.59	-1.41	54.00	17.54	32.03	3.02	0.00	Average
2 @	2413.740	103.68			68.57	32.09	3.02	0.00	Average
1 @	2389.990	71.73	-2.27	74.00	36.68	32.03	3.02	0.00	Peak
2 @	2415.260	113.59			78.48	32.09	3.02	0.00	Peak

Item 2 is Fundamental Emissions.

**Channel 6**

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>Read Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	2435.780	106.52			71.32	32.15	3.05	0.00	Average
1 @	2438.060	117.39			82.13	32.21	3.05	0.00	Peak

An item 1 is Fundamental Emissions.

**Channel 11**

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>Read Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	2465.420	114.38			79.02	32.28	3.08	0.00	Peak
2 @	2483.500	73.53	-0.47	74.00	38.11	32.34	3.08	0.00	Peak
1 @	2464.660	100.34			64.98	32.28	3.08	0.00	Average
2 @	2483.500	53.47	-0.53	54.00	18.05	32.34	3.08	0.00	Average

Item 1 is Fundamental Emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<b>Test Date</b>	Oct. 11, 2010	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	26.5°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Daniel	<b>Configurations</b>	MCS0 20MHz Ch1, 6, 11

**Channel 1**

<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>ReadAntenna Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
<b>MHz</b>	<b>dBuV/m</b>	<b>dB</b>	<b>dBuV/m</b>	<b>dBuV</b>	<b>dB/m</b>	<b>dB</b>	<b>dB</b>	
1 @ 2390.000	52.40	-1.60	54.00	17.35	32.03	3.02	0.00	Average
2 @ 2413.740	103.27			68.16	32.09	3.02	0.00	Average
1 @ 2390.000	71.66	-2.34	74.00	36.61	32.03	3.02	0.00	Peak
2 @ 2415.260	113.36			78.25	32.09	3.02	0.00	Peak

Item 2 is Fundamental Emissions.

**Channel 6**

<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>ReadAntenna Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
<b>MHz</b>	<b>dBuV/m</b>	<b>dB</b>	<b>dBuV/m</b>	<b>dBuV</b>	<b>dB/m</b>	<b>dB</b>	<b>dB</b>	
1 @ 2435.210	105.96			70.76	32.15	3.05	0.00	Average
1 @ 2439.580	117.36			82.10	32.21	3.05	0.00	Peak

An item 1 is Fundamental Emissions.

**Channel 11**

<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>ReadAntenna Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
<b>MHz</b>	<b>dBuV/m</b>	<b>dB</b>	<b>dBuV/m</b>	<b>dBuV</b>	<b>dB/m</b>	<b>dB</b>	<b>dB</b>	
1 @ 2465.420	103.41			68.05	32.28	3.08	0.00	Average
2 @ 2483.500	53.77	-0.23	54.00	18.35	32.34	3.08	0.00	Average
1 @ 2457.060	112.99			77.66	32.28	3.05	0.00	Peak
2 @ 2483.500	72.61	-1.39	74.00	37.19	32.34	3.08	0.00	Peak

Item 1 is Fundamental Emissions.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


For Emission not in Restricted Band

Low Band Edge Plot on Configuration IEEE 802.11b / 2412 MHz

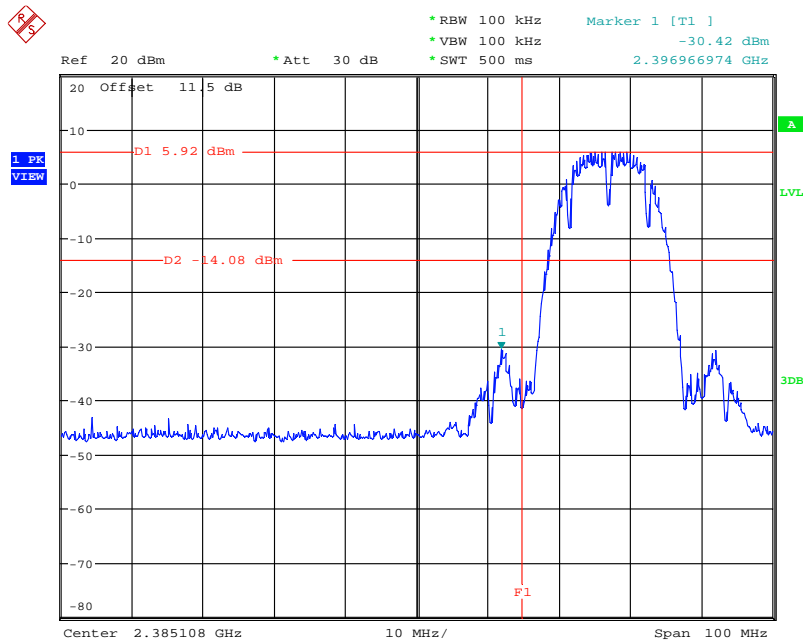


Date: 22.OCT.2010 10:30:03

High Band Edge Plot on Configuration IEEE 802.11b / 2462 MHz

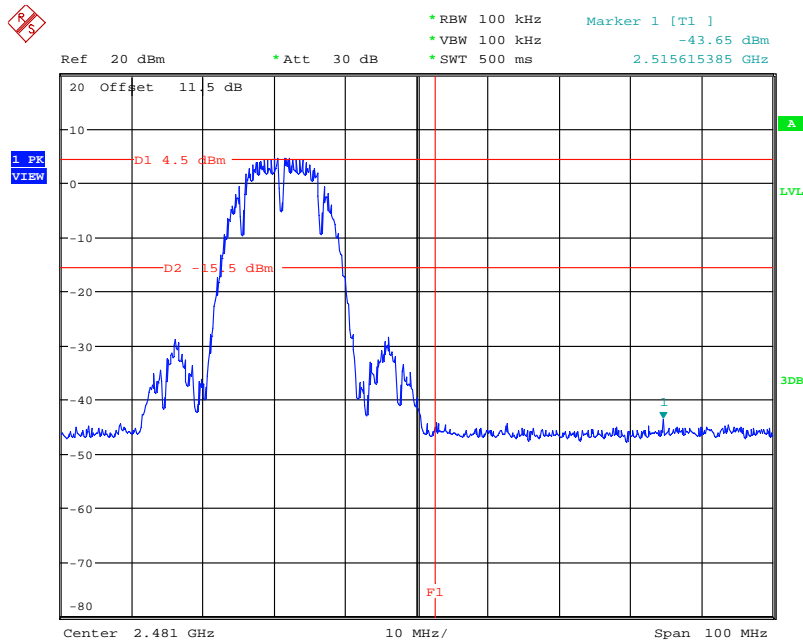


Date: 22.OCT.2010 10:34:30

Low Band Edge Plot on Configuration IEEE 802.11g / 2412 MHz

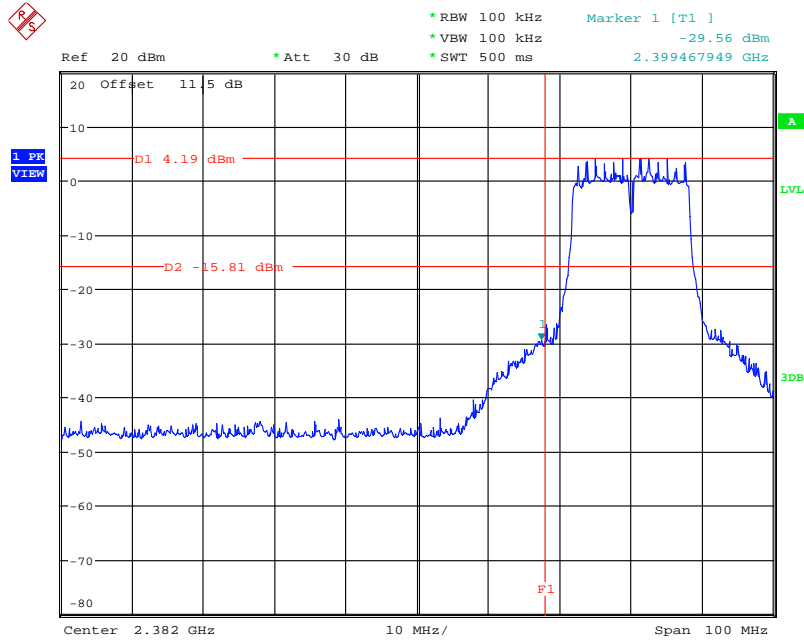


Date: 22.OCT.2010 10:54:57

High Band Edge Plot on Configuration IEEE 802.11g / 2462 MHz

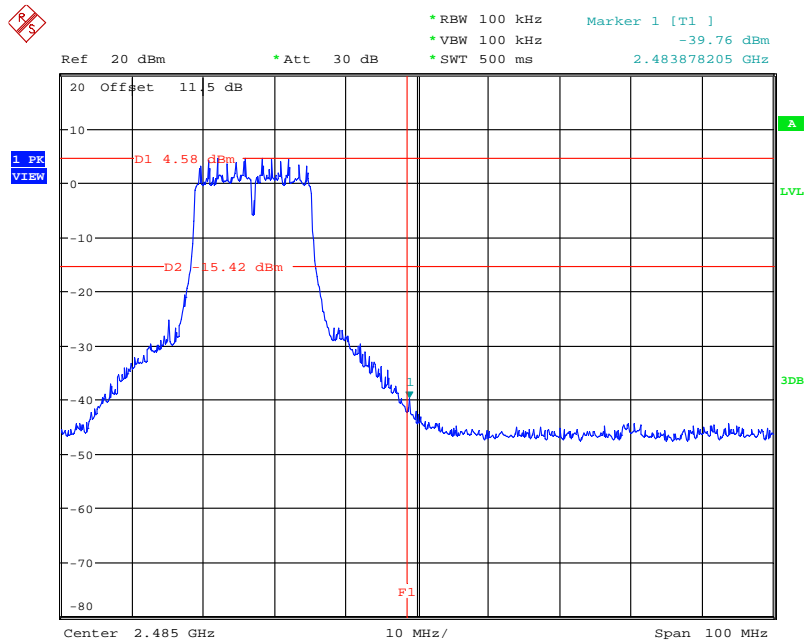


Date: 22.OCT.2010 10:40:22

Low Band Edge Plot on Configuration IEEE 802.11n MCS0 20MHz / 2412 MHz

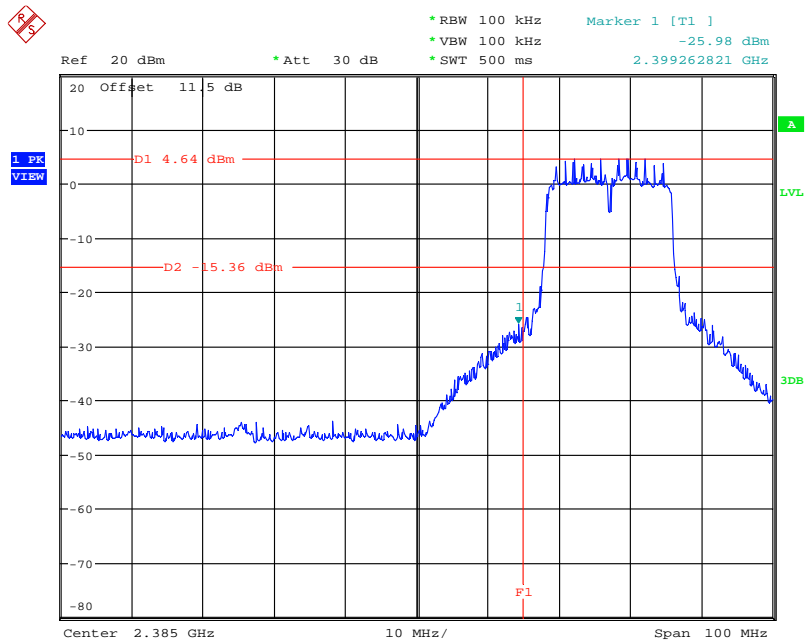

Date: 22.OCT.2010 10:42:39

High Band Edge Plot on Configuration IEEE 802.11n MCS0 20MHz / 2462 MHz

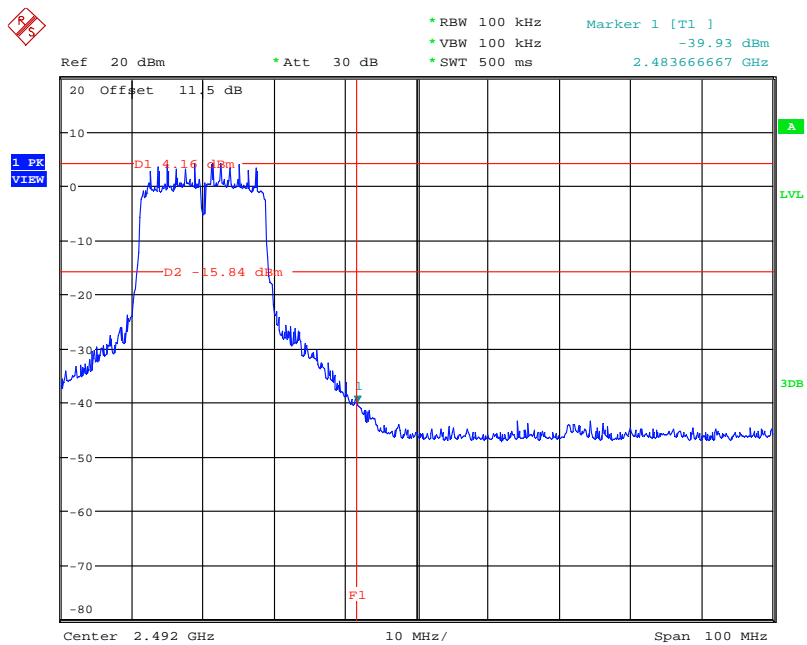

Date: 22.OCT.2010 10:46:06

**3.7. Antenna Requirements****3.7.1. Limit**

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

**3.7.2. Antenna Connector Construction**

Please refer to section 2.3 in this test report; there is no antenna connector on this board.

**4. LIST OF MEASURING EQUIPMENTS**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Apr. 06, 2010	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99041	9kHz – 30MHz	Mar. 23, 2010	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	Apr. 29, 2010	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2010	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSU26.5	100015	20Hz ~ 26.5GHz	Nov. 19, 2009	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Apr. 16, 2010	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	N/A	Oct. 22, 2010	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 02, 2009	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 02, 2009	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 30, 2010	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	0917017	300MHz~40GHz	Dec. 03, 2009	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	0949003	300MHz~40GHz	Dec. 03, 2009	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30 MHz - 1 GHz 3m	May 01, 2010	Radiation (03CH02-HY)
Spectrum Analyzer	R&S	FSP40	100305/040	9 kHz - 40GHz	Feb. 02, 2010	Radiation (03CH02-HY)
Amplifier	Agilent	8447D	2944A11146	100 kHz – 1.3 GHz	Jul. 23, 2010	Radiation (03CH02-HY)
Amplifier	Agilent	8449B	3008A02373	1GHz – 26.5 GHz	Jul. 23, 2010	Radiation (03CH02-HY)
Horn Antenna	ETS-LINDGREN	3117	00091920	1GHz~18GHz	Oct. 22, 2009	Radiation (03CH02-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz ~ 1GHz	Feb. 26, 2010	Radiation (03CH02-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX106	03CH02-HY	1GHz~40GHz	Feb. 26, 2010	Radiation (03CH02-HY)
Bilog Antenna	SCHAFFNER	CBL61128	2723	30 MHz - 2 GHz	Nov. 30, 2009	Radiation (03CH02-HY)
Turn Table	HD	DS 420	420/649/00	0 - 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	HD	MA 240	240/559/00	1 m - 4 m	N/A	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul. 27, 2010*	Radiation (03CH02-HY)
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Jul. 26, 2010*	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.



**5. TEST LOCATIONS**

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

6. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-100529

財團法人全國認證基金會  
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

**Sporton International Inc.**

**EMC & Wireless Communications Laboratory**

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.

is accredited in respect of laboratory

- Accreditation Criteria : ISO/IEC 17025:2005
- Accreditation Number : 1190
- Originally Accredited : December 15, 2003
- Effective Period : January 10, 2010 to January 09, 2013
- Accredited Scope : Testing Field, see described in the Appendix
- Specific Accreditation Program : Accreditation Program for Designated Testing Laboratory for Commodities Inspection  
Accreditation Program for Telecommunication Equipment Testing Laboratory  
Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities

Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date : May 29, 2010

P1, total 23 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix