

FCC PART 27

TEST AND MEASUREMENT REPORT

For

Cellphone-Mate, Inc.

48820 Kato Road, Suite 300B,
Fremont, CA 94539, USA

FCC ID: RSNCM700V
Model: CM700V

Report Type: Original Report	Product Type: Upper 700MHz Amplifier
Test Engineer: Jack Liu	
Report Number: R1105172-27	
Report Date: 2011-06-22	
Reviewed By: EMC/RF Lead	Victor Zhang 
Prepared By: Bay Area Compliance Laboratories Corp. (84) 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: (408) 732-9162 Fax: (408) 732 9164	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "*" ...

TABLE OF CONTENTS

1	GENERAL INFORMATION	5
1.1	PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
1.2	MECHANICAL DESCRIPTION	5
1.3	OBJECTIVE.....	5
1.4	RELATED SUBMITTAL(S)/GRANT(S).....	5
1.5	TEST METHODOLOGY	6
1.6	MEASUREMENT UNCERTAINTY.....	6
1.7	TEST FACILITY.....	6
2	SYSTEM TEST CONFIGURATION	7
2.1	JUSTIFICATION.....	7
2.2	EUT EXERCISE SOFTWARE.....	7
2.3	EQUIPMENT MODIFICATIONS	7
2.4	LOCAL SUPPORT EQUIPMENT AND SOFTWARE LIST AND DETAILS	7
2.5	INTERNAL CONFIGURATIONS OF EUT.....	7
2.6	INTERFACE PORTS AND CABLES	7
2.7	TEST SETUP BLOCK DIAGRAM.....	8
3	SUMMARY OF TEST RESULTS.....	10
4	FCC §2.1046 & §27.50 – RF OUTPUT POWER.....	11
4.1	APPLICABLE STANDARD	11
4.2	TEST PROCEDURE	11
4.3	TEST EQUIPMENT LIST AND DETAILS	11
4.4	TEST ENVIRONMENTAL CONDITIONS	11
4.5	TEST RESULTS	12
5	FCC §2.1047 - MODULATION CHARACTERISTIC.....	14
5.1	APPLICABLE STANDARD	14
5.2	TEST RESULT	14
6	FCC §2.1049 & §27.53 - OCCUPIED BANDWIDTH	15
6.1	APPLICABLE STANDARD	15
6.2	TEST PROCEDURE	15
6.3	TEST EQUIPMENT LIST AND DETAILS	15
6.4	TEST ENVIRONMENTAL CONDITIONS	15
6.5	TEST RESULTS	16
7	FCC §2.1053 & §27.53 - SPURIOUS RADIATED EMISSIONS.....	41
7.1	APPLICABLE STANDARD	41
7.2	TEST PROCEDURE	41
7.3	TEST EQUIPMENT LIST AND DETAILS	41
7.4	TEST ENVIRONMENTAL CONDITIONS	42
7.5	SUMMARY OF TEST RESULTS	42
7.6	TEST RESULTS	42
8	FCC §2.1051 & §27.53 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	43
8.1	APPLICABLE STANDARD	43
8.2	TEST PROCEDURE	43
8.3	TEST EQUIPMENT LIST AND DETAILS	43
8.4	TEST ENVIRONMENTAL CONDITIONS	43
8.5	TEST RESULTS	43

9	FCC §27.53 – BAND EDGE	52
9.1	APPLICABLE STANDARD	52
9.2	TEST PROCEDURE	52
9.3	TEST EQUIPMENT LIST AND DETAILS	52
9.4	TEST ENVIRONMENTAL CONDITIONS	52
9.5	TEST RESULTS	52
10	FCC §2.1055 & §27.54 – FREQUENCY STABILITY	77
10.1	APPLICABLE STANDARD	77
10.2	TEST PROCEDURE	77
10.3	TEST RESULTS	77
11	FCC §1.1307(B), §27.52 & §2.1091 - RF EXPOSURE INFORMATION	78
11.1	APPLICABLE STANDARD	78
11.2	MPE PREDICTION	78
12	EXHIBIT A - FCC ID LABEL REQUIREMENTS	80
12.1	FCC ID LABEL REQUIREMENT	80
12.2	FCC ID LABEL CONTENTS	80
12.3	FCC LABEL LOCATION ON EUT	80
13	EXHIBIT B - TEST SETUP PHOTOGRAPHS	81
13.1	RADIATED EMISSIONS - FRONT VIEW	81
13.2	RADIATED EMISSIONS 30 MHZ TO 1 GHZ- REAR VIEW	81
13.3	RADIATED EMISSIONS ABOVE 1 GHZ- REAR VIEW	82
13.4	CONDUCTED MEASUREMENT VIEW	82
14	EXHIBIT C - EUT PHOTOGRAPHS	83
14.1	EUT - TOP VIEW	83
14.2	EUT - BOTTOM VIEW	83
14.3	EUT - SIDE VIEW 1	84
14.4	EUT - SIDE VIEW 2	84
14.5	EUT – UPLINK PORT VIEW	85
14.6	EUT – DOWNLINK PORT VIEW	85
14.7	EUT – COVER OFF VIEW	86
14.8	EUT – COVER OFF CLOSE UP VIEW	86
14.9	EUT – MAIN PCB BOARD FRONT VIEW	87
14.10	EUT – MAIN PCB BOARD REAR VIEW	87
14.11	AC/DC POWER SUPPLY VIEW	88

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R1105172-27	Original Report	2011-06-22

1 GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

The *Cellphone-Mate, Inc.* FCC ID: RSNCM700V, Model: CM700V Amplifier or the "EUT" as referred to in this report is a LTE Bi-directional amplifier. The LTE Band support three modulations: QPSK, 16QAM, 64QAM.

Technical Specification

Parameters		Specification
Frequency	Downlink	746-757 MHz
	Uplink	776-787 MHz
Output Power		Maximum 2 Watt
AC Power		110V, 60Hz
Power Consumption		15 Watt

1.2 Mechanical Description

The EUT measures 14cm (**L**) x 12cm (**W**) x 3cm (**H**), and weighs approximately 802.5 g.

The test data gathered are from production sample, sample number: 3 provided by the manufacturer.

1.3 Objective

This type approval report is prepared on behalf of *Cellphone-Mate, Inc.* in accordance with Part 2, Subpart J, and Part 27 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC rules for RF output power, modulation characteristic, occupied bandwidth, spurious emissions at antenna terminal, field strength of spurious radiation, band edge, and conducted and radiated margin.

1.4 Related Submittal(s)/Grant(s)

N/A

1.5 Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 27 - Miscellaneous Wireless Communications Services
Applicable Standards: TIA/EIA-603-C, ANSI C63.4-2003.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the values ranging from +2.0 dB for Conducted Emissions tests and +4.0 dB for Radiated Emissions tests are the most accurate estimates pertaining to uncertainty of EMC measurements at BACL Corp.

Detailed instrumentation measurement uncertainties can be found in BACL Corp. report QAP-018.

1.7 Test Facility

The test site used by BACL Corp. to collect radiated and conducted emissions measurement data is located at its facility in Sunnyvale, California, USA.

The test sites at BACL have been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and

December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission, Industry Canada, and Voluntary Control Council for Interference has the reports on file and is listed under FCC registration number: 90464, IC registration number: 3062A, and VCCI Registration Number: C-2463 and R-2698. The test site has been approved by the FCC, IC, and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200167-0). The current scope of accreditations can be found at <http://ts.nist.gov/ts/htdocs/210/214/scopes/2001670.htm>

2 SYSTEM TEST CONFIGURATION

2.1 Justification

The EUT was configured for testing according to TIA/EIA-603-C.

The final qualification test was performed with the EUT operating at normal mode.

2.2 EUT Exercise Software

N/A, signal was sent through EUT using a signal generator, device was set to normal operating mode.

2.3 Equipment Modifications

No modifications were made to the EUT.

2.4 Local Support Equipment and Software List and Details

Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Signal Generator	SMIQ03	DE23746
Linksys	Wireless-N Gigabit Router	WRT310N	CSF01H250300
Dell	Laptop	PP18L	17899297525
Agilent	ESG-D Series Signal Generator	E4438C	MY45091309
Agilent	Signal Studio for 3GPP LTE	N7624B	-

2.5 Internal Configurations of EUT


Manufacturer	Description	Model	Serial Number
Cellphone-Mate Inc	Main PCB Board	CM2000-WL V4.0	-

2.6 Interface Ports and Cables


Cable Description	Length (m)	To	From
RF Cable	< 1	EUT	Spectrum Analyzer
2 RF Cables	< 1	EUT	Signal Generator

2.7 Test Setup Block Diagram

Conducted RF

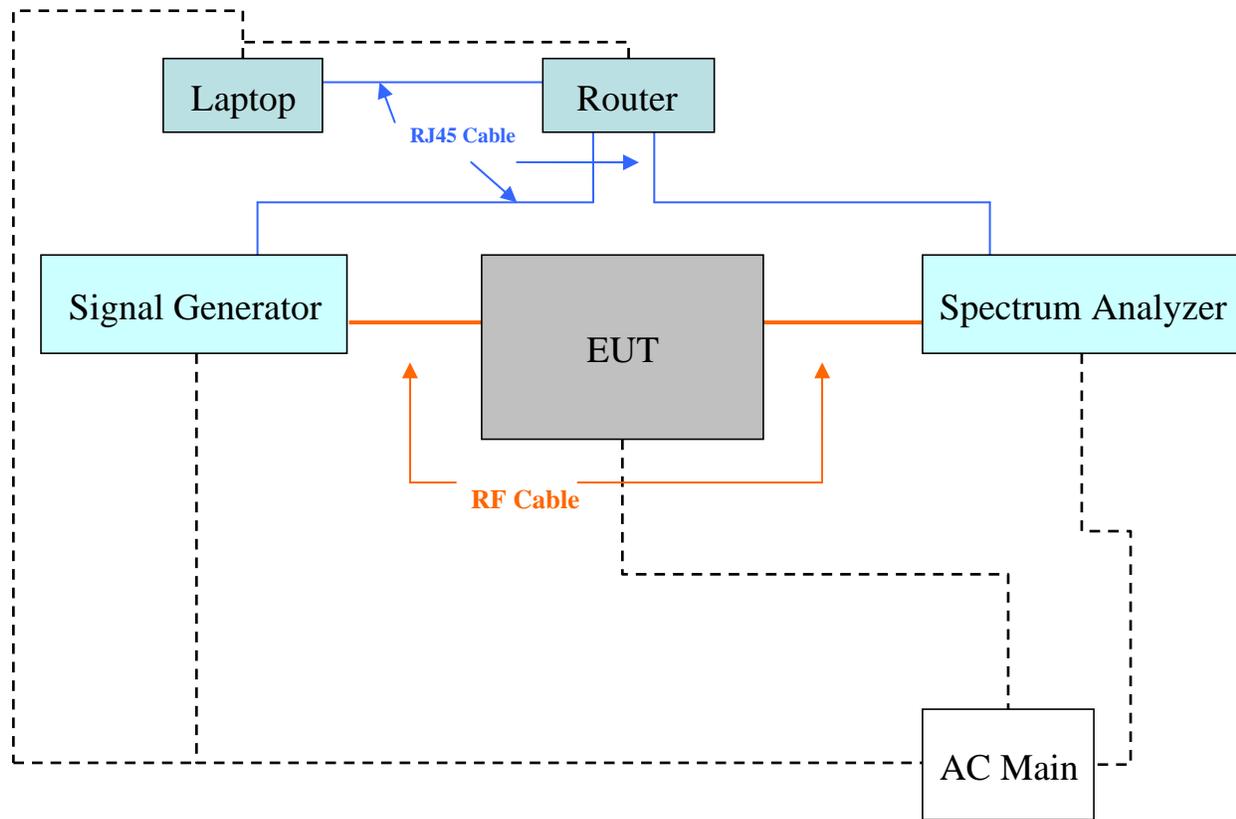

Radiated Emission

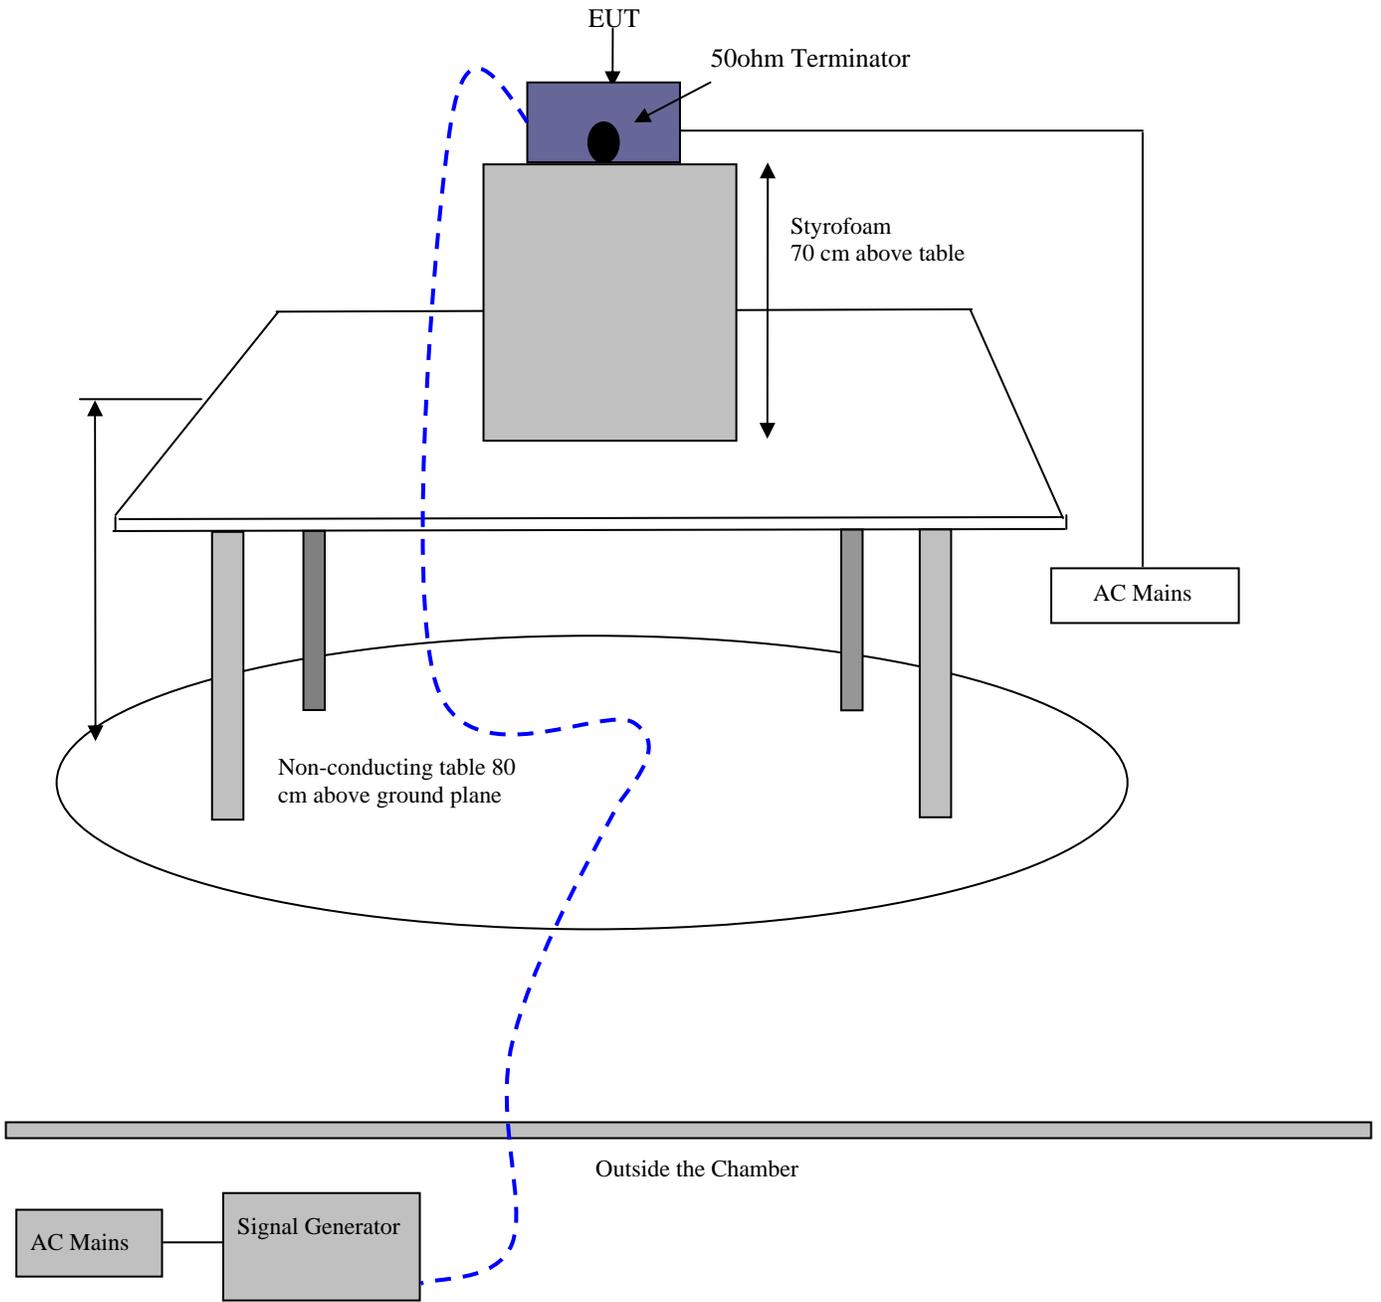

3 SUMMARY OF TEST RESULTS

FCC Rules	Description of Tests	Results
§2.1046, §27.50(d)(i)	RF Output Power	Compliant
§2.1047	Modulation Characteristics	N/A
§2.1049, §27.53 (c)	Occupied Bandwidth	Compliant
§2.1053, §27.53 (c)(g)	Spurious Radiated Emissions	Compliant
§2.1051, §27.53 (c)(g)	Spurious Emissions at Antenna Terminals	Compliant
§27.53 (c)(g)	Band Edge	Compliant
§2.1055, §27.54	Frequency Stability	Note ¹
§2.1091, §27.52	RF Exposure	Compliant

N/A: Not applicable.

Note¹: EUT is an amplifier; frequency stability testing is not required.

4 FCC §2.1046 & §27.50 – RF OUTPUT POWER

4.1 Applicable Standard

According to FCC §27.50, the maximum effective radiated power (ERP) of fixed and base station must not exceed 1000 Watts.

4.2 Test Procedure

Conducted:

The RF output of the transmitter was connected to the signal generator and the spectrum analyzer through sufficient attenuation.

4.3 Test Equipment List and Details

Manufacturers	Descriptions	Models	Serial Numbers	Calibration Dates
Agilent	ESG-D Series Signal Generator	E4438C	MY45091309	2011-04-28
Agilent	Spectrum Analyzer	E4446A	US44300386	2010-08-18

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

4.4 Test Environmental Conditions

Temperature:	20-25°C
Relative Humidity:	39-44 %
ATM Pressure:	101-102 kPa

The testing was performed by Jack Liu from 2011-05-23 to 2011-05-26 at RF Site.

4.5 Test Results

746-757 MHz/776-787 MHz Band

Maximum Output Power (LTE) – Downlink

Mode	Modulation	Frequency (MHz)	Input Power (dBm)	Output Power (dBm)
Downlink 746-757 MHz	QPSK (1.4 MHz)	747	-59	11.21
	QPSK (1.4 MHz)	752	-59	10.72
	QPSK (1.4 MHz)	756	-59	9.76
	16QAM (1.4 MHz)	747	-59	11.12
	16QAM (1.4 MHz)	752	-59	11.09
	16QAM (1.4 MHz)	756	-59	9.47
	64QAM (1.4 MHz)	747	-59	11.25
	64QAM (1.4 MHz)	752	-59	11.07
	64QAM (1.4 MHz)	756	-59	9.71
	QPSK (3 MHz)	748	-59	11.17
	QPSK (3 MHz)	752	-59	10.74
	QPSK (3 MHz)	755	-59	9.54
	16QAM (3 MHz)	748	-59	11.22
	16QAM (3 MHz)	752	-59	10.8
	16QAM (3 MHz)	755	-59	9.64
	64QAM (3 MHz)	748	-59	11.18
	64QAM (3 MHz)	752	-59	10.77
	64QAM (3 MHz)	755	-59	9.53
	QPSK (5 MHz)	749	-59	11.15
	QPSK (5 MHz)	754	-59	9.73
	16QAM (5 MHz)	749	-59	11.16
	16QAM (5 MHz)	754	-59	9.75
	64QAM (5 MHz)	749	-59	11.09
	64QAM (5 MHz)	754	-59	9.64
	QPSK (10 MHz)	752	-59	10.54
	16QAM (10 MHz)	752	-59	10.59
64QAM (10 MHz)	752	-59	10.64	

Maximum Output Power (LTE) – Uplink

Mode	Modulation	Frequency (MHz)	Input Power (dBm)	Output Power (dBm)
Uplink 776-787 MHz	QPSK (1.4 MHz)	777	-42	24.38
	QPSK (1.4 MHz)	782	-42	24.6
	QPSK (1.4 MHz)	786	-42	26.37
	16QAM (1.4 MHz)	777	-42	24.24
	16QAM (1.4 MHz)	782	-42	24.23
	16QAM (1.4 MHz)	786	-42	26.08
	64QAM (1.4 MHz)	777	-42	24.41
	64QAM (1.4 MHz)	782	-42	24.34
	64QAM (1.4 MHz)	786	-42	26.02
	QPSK (3 MHz)	778	-42	24.37
	QPSK (3 MHz)	782	-42	24.65
	QPSK (3 MHz)	785	-42	26.38
	16QAM (3 MHz)	778	-42	24.22
	16QAM (3 MHz)	782	-42	24.46
	16QAM (3 MHz)	785	-42	26.16
	64QAM (3 MHz)	778	-42	24.1
	64QAM (3 MHz)	782	-42	24.52
	64QAM (3 MHz)	785	-42	26.2
	QPSK (5 MHz)	779	-42	28.48
	QPSK (5 MHz)	784	-42	28.87
	16QAM (5 MHz)	779	-42	24.08
	16QAM (5 MHz)	784	-42	25.76
	64QAM (5 MHz)	779	-42	23.82
	64QAM (5 MHz)	784	-42	25.75
	QPSK (10 MHz)	782	-42	25.04
	16QAM (10 MHz)	782	-42	25.03
64QAM (10 MHz)	782	-42	25.14	

5 FCC §2.1047 - MODULATION CHARACTERISTIC

5.1 Applicable Standard

According to FCC §2.1047(d) and Part 27, there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

5.2 Test Result

N/A

6 FCC §2.1049 & §27.53 - OCCUPIED BANDWIDTH

6.1 Applicable Standard

Requirements: FCC §2.1049 and §27.53.

6.2 Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 100 kHz and the 26 dB & 99% bandwidth was recorded.

6.3 Test Equipment List and Details

Manufacturers	Descriptions	Models	Serial Numbers	Calibration Dates
Agilent	ESG-D Series Signal Generator	E4438C	MY45091309	2011-04-28
Agilent	Spectrum Analyzer	E4446A	US44300386	2010-08-18

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

6.4 Test Environmental Conditions

Temperature:	20-25°C
Relative Humidity:	39-44 %
ATM Pressure:	101-102 kPa

The testing was performed by Jack Liu from 2011-05-23 to 2011-05-26 at RF Site.

6.5 Test Results

746-757 MHz/776-787 MHz Band

Occupied Bandwidth (LTE) – Downlink

Mode	Modulation	Frequency (MHz)	Emission Bandwidth Input (MHz)	Emission Bandwidth Output (MHz)
Downlink 746-757 MHz	QPSK (1.4 MHz)	752	1.1761	1.1727
	16QAM (1.4 MHz)	752	1.1762	1.1755
	64QAM (1.4 MHz)	752	1.1789	1.1734
	QPSK (3 MHz)	752	2.7334	2.7361
	16QAM (3 MHz)	752	2.7410	2.7424
	64QAM (3 MHz)	752	2.7380	2.7357
	QPSK (5 MHz)	754	4.5042	4.5098
	16QAM (5 MHz)	754	4.5080	4.5097
	64QAM (5 MHz)	754	4.5014	4.5083
	QPSK (10 MHz)	752	8.9378	8.9235
	16QAM (10 MHz)	752	8.9381	8.9245
	64QAM (10 MHz)	752	8.9377	8.9176


Occupied Bandwidth (LTE) – Uplink

Mode	Modulation	Frequency (MHz)	Emission Bandwidth Input (MHz)	Emission Bandwidth Output (MHz)
Uplink 776-787 MHz	QPSK (1.4 MHz)	782	1.1483	1.1668
	16QAM (1.4 MHz)	782	1.1450	1.1645
	64QAM (1.4 MHz)	782	1.1481	1.1717
	QPSK (3 MHz)	782	2.7223	2.7264
	16QAM (3 MHz)	782	2.7163	2.7260
	64QAM (3 MHz)	782	2.7169	2.7235
	QPSK (5 MHz)	784	4.4792	4.4662
	16QAM (5 MHz)	784	4.4900	4.4702
	64QAM (5 MHz)	784	4.4708	4.4736
	QPSK (10 MHz)	782	8.9114	8.9081
	16QAM (10 MHz)	782	8.9134	8.9231
	64QAM (10 MHz)	782	8.9094	8.9083


DL: 746-757 MHz

LTE-QPSK (1.4 MHz), Frequency: 752 MHz

Input

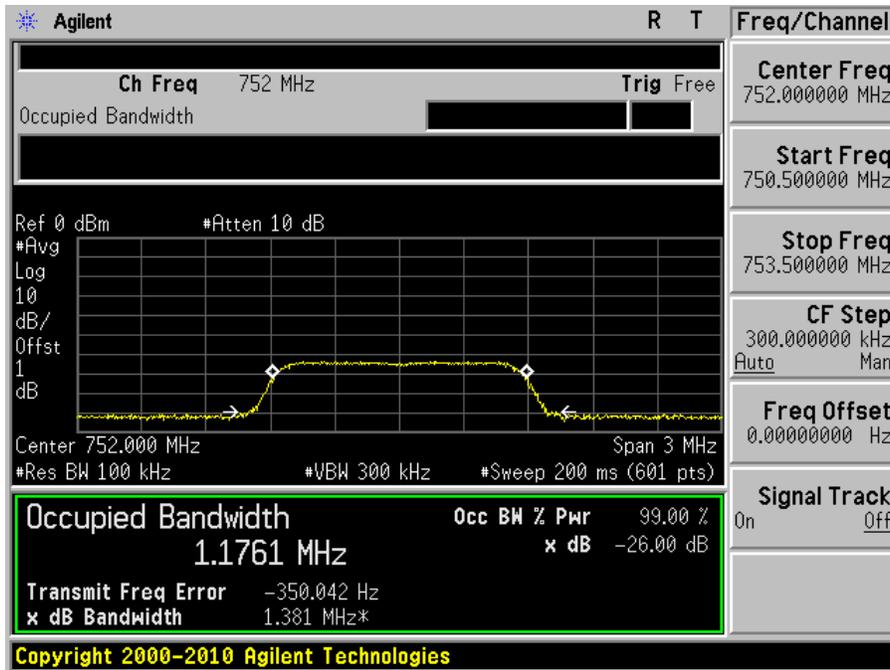


Output

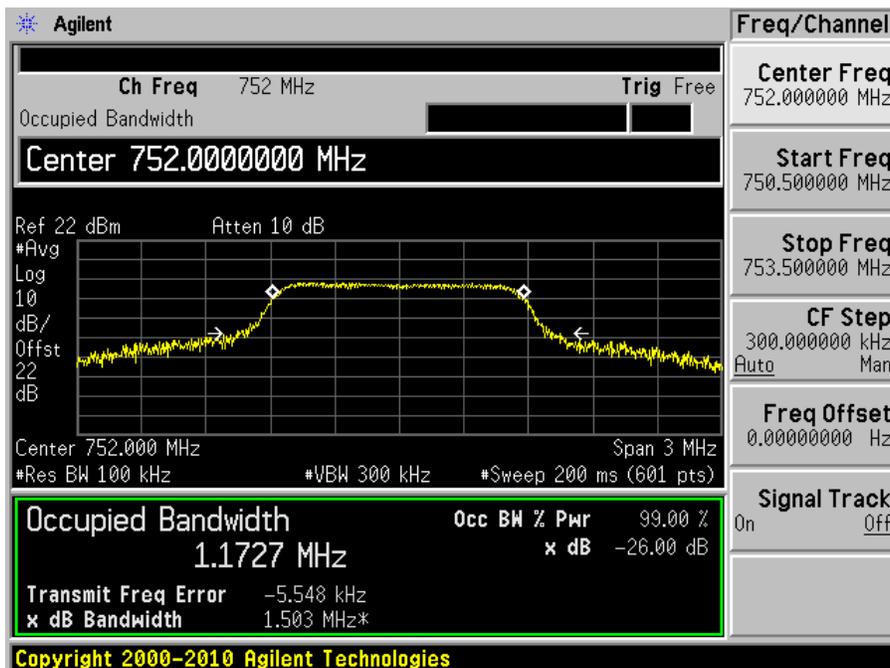


LTE-16QAM (1.4 MHz), Frequency: 752 MHz

Input

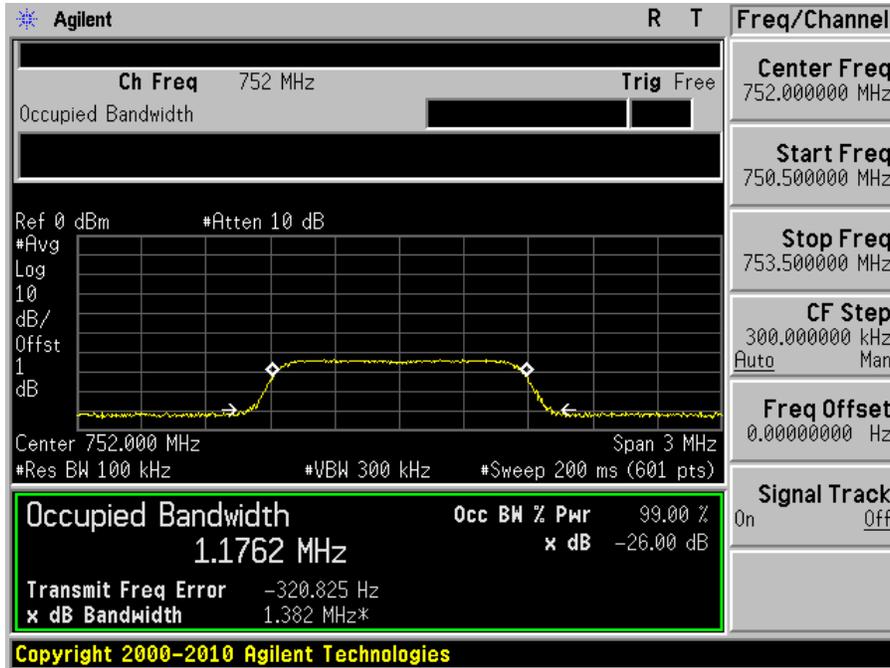


Output

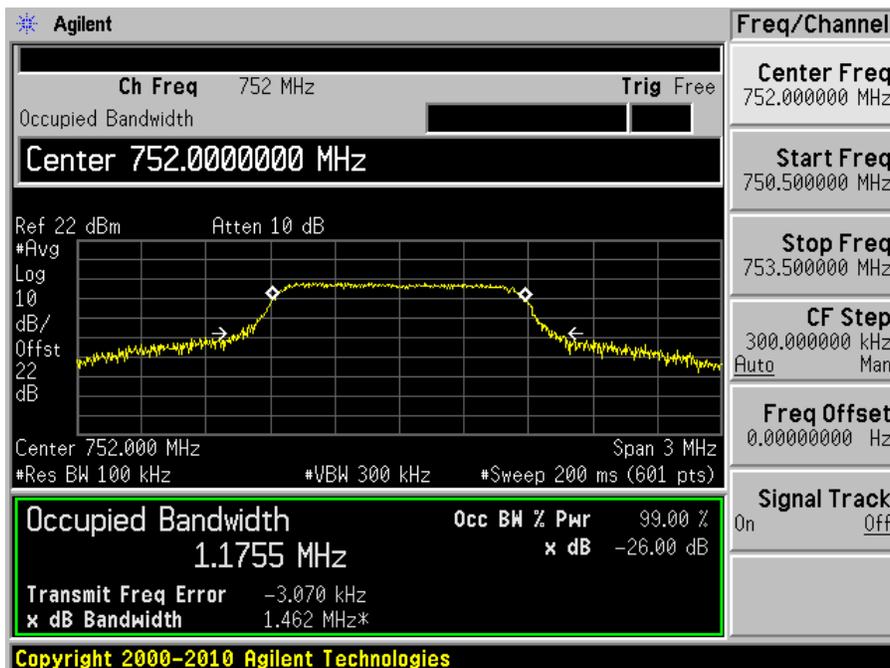


LTE-64QAM (1.4 MHz), Frequency: 752 MHz

Input

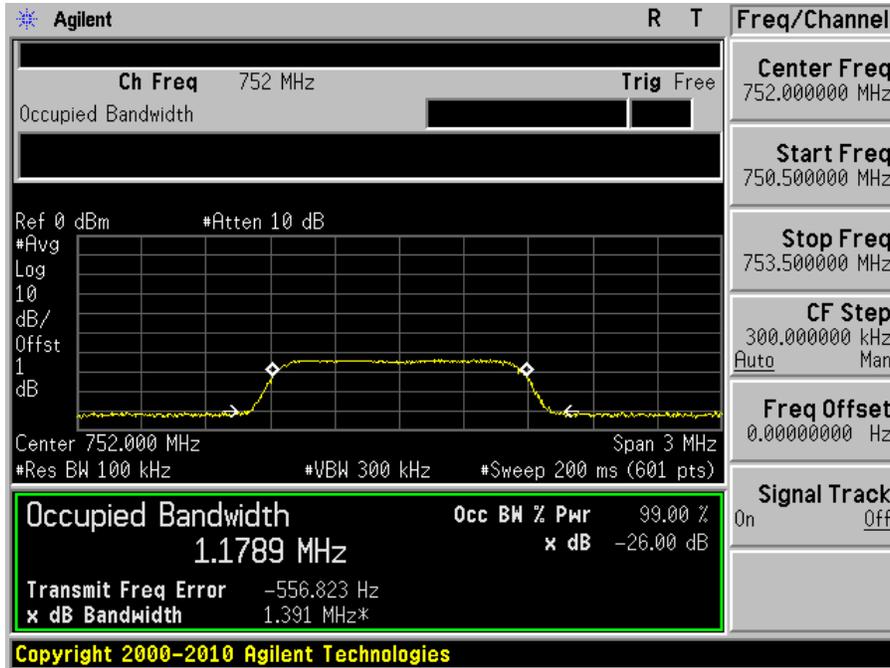


Output

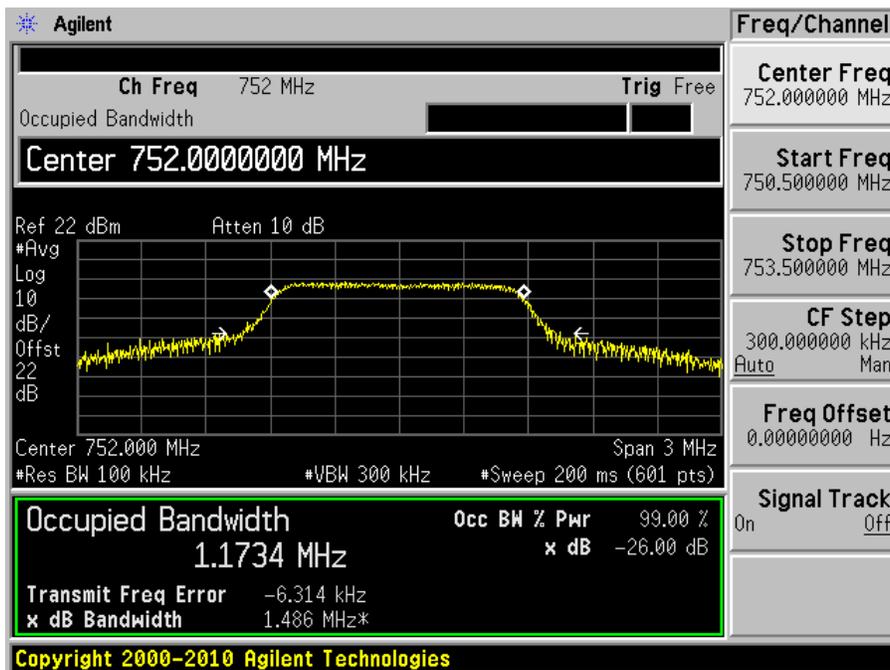


LTE-QPSK (3 MHz), Frequency: 752 MHz

Input

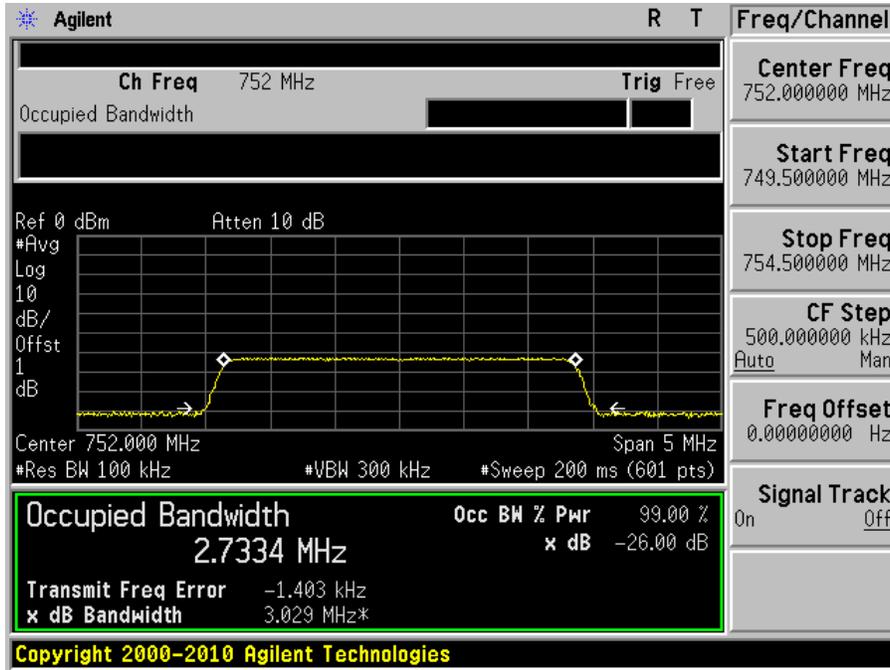


Output

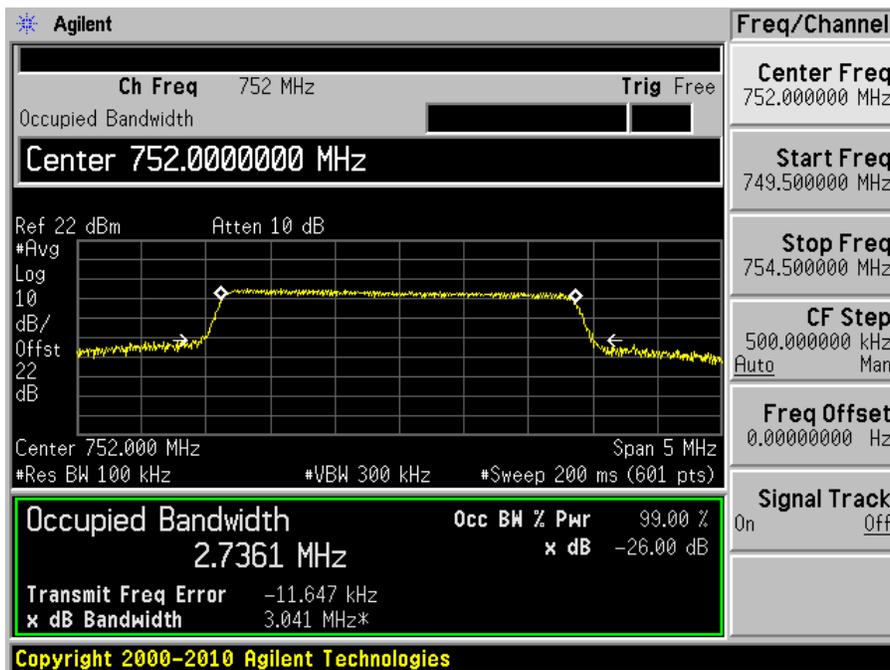


LTE-16QAM (3 MHz), Frequency: 752 MHz

Input

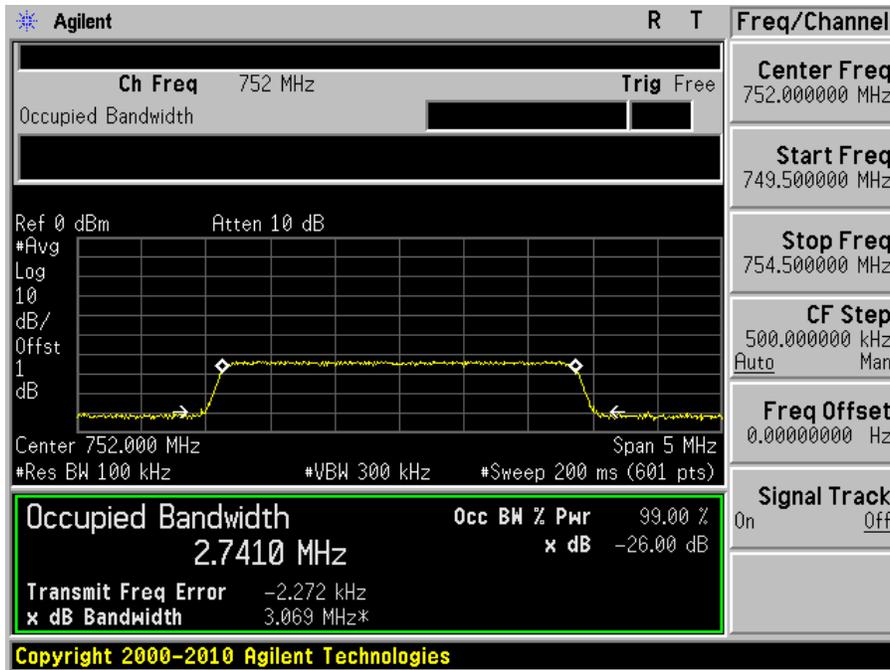


Output

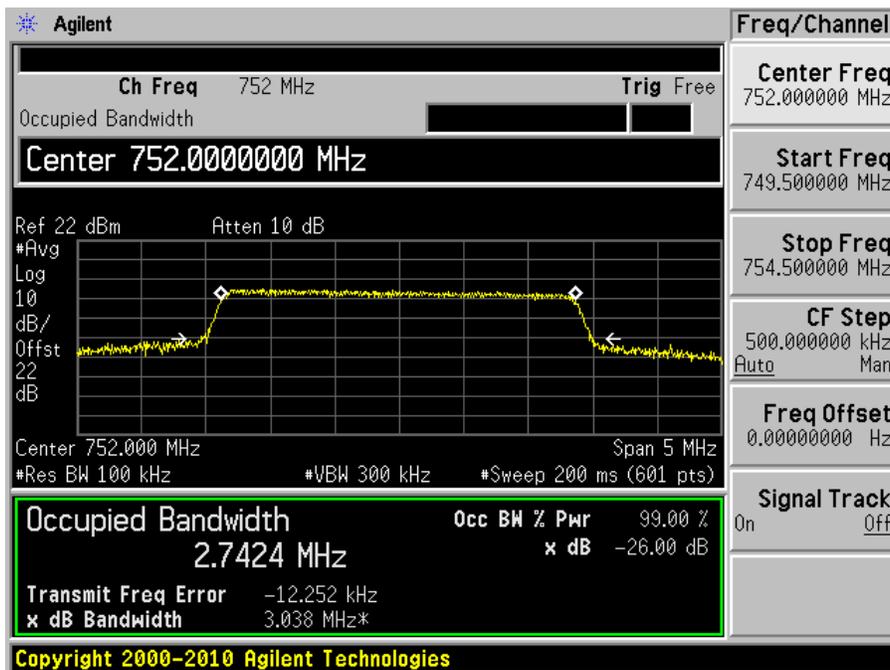


LTE-64QAM (3 MHz), Frequency: 752 MHz

Input

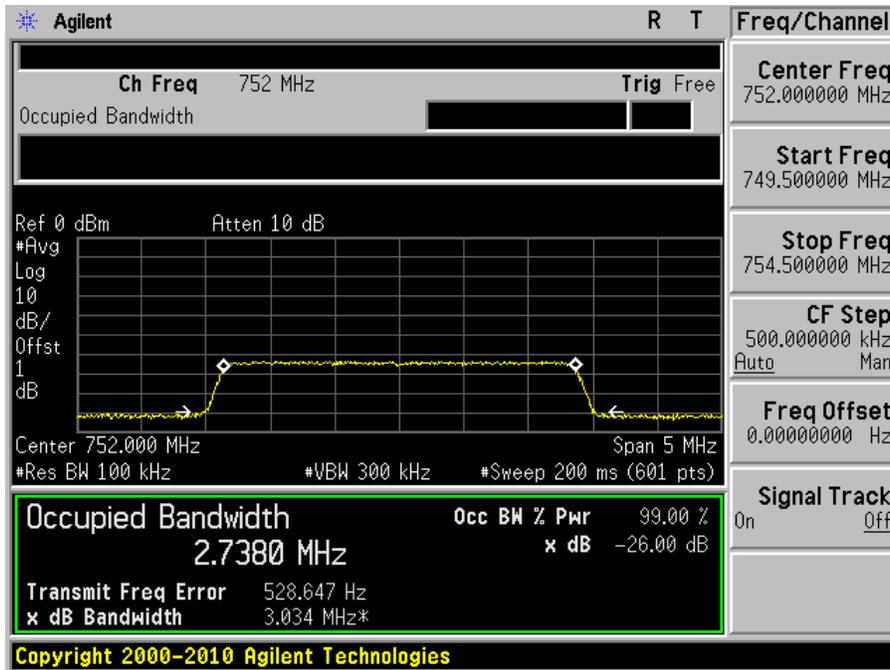


Output

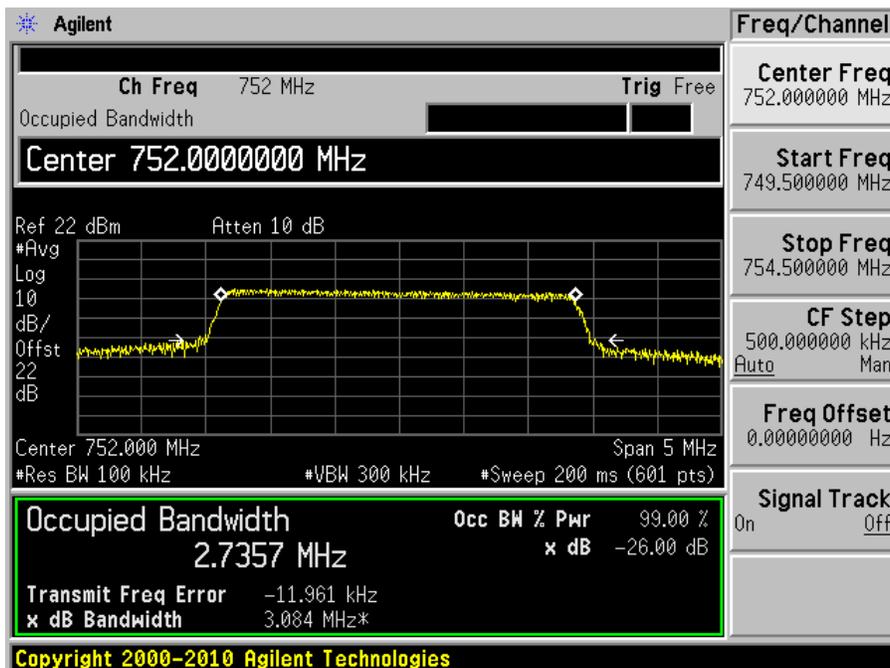


LTE-QPSK (5 MHz), Frequency: 754 MHz

Input

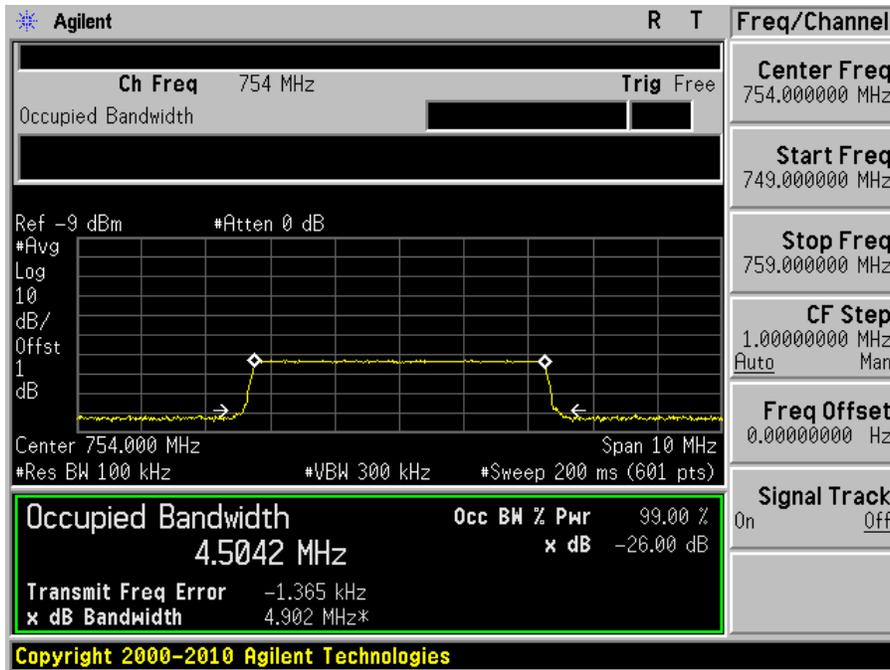


Output

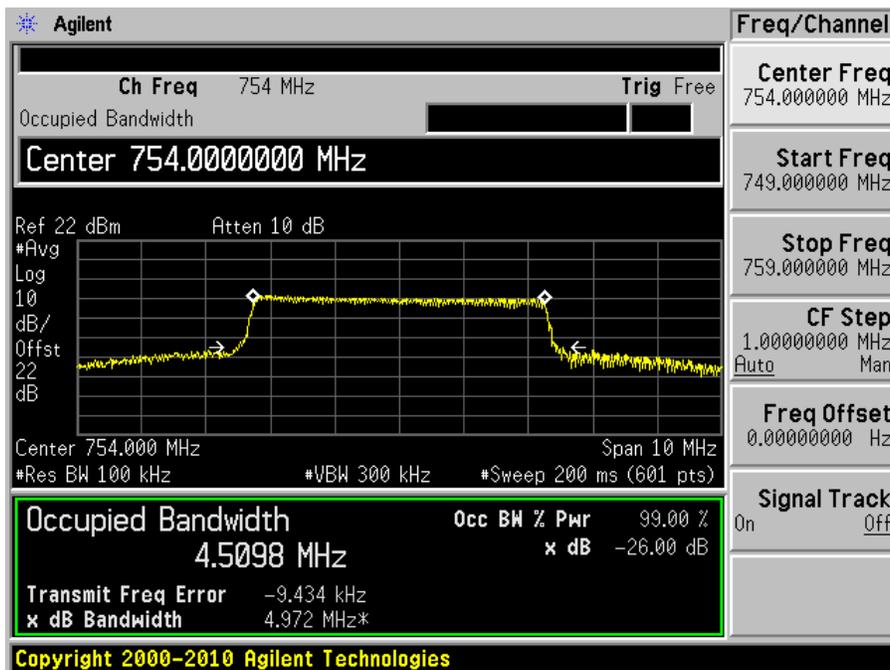


LTE-16QAM (5 MHz), Frequency: 754 MHz

Input

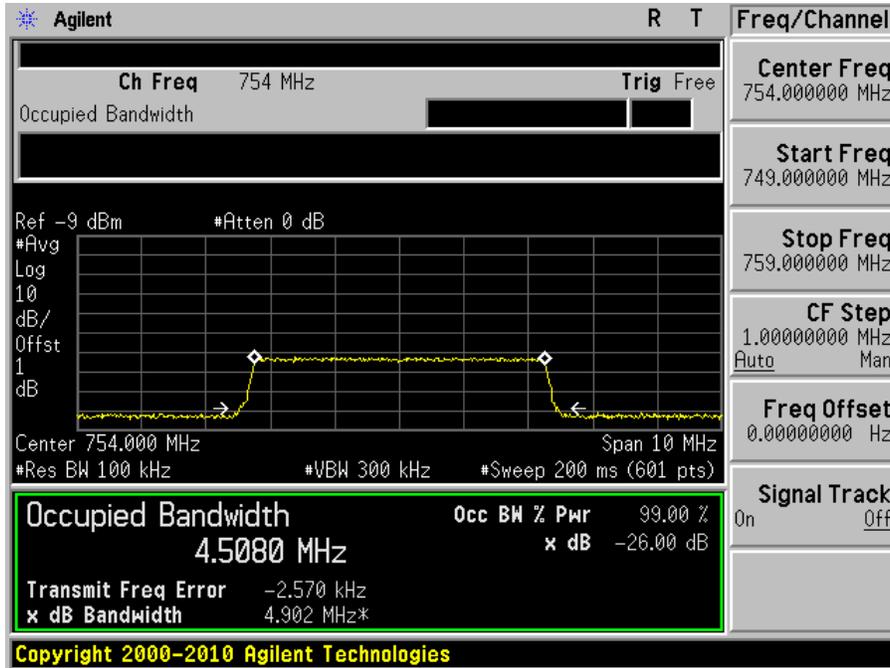


Output

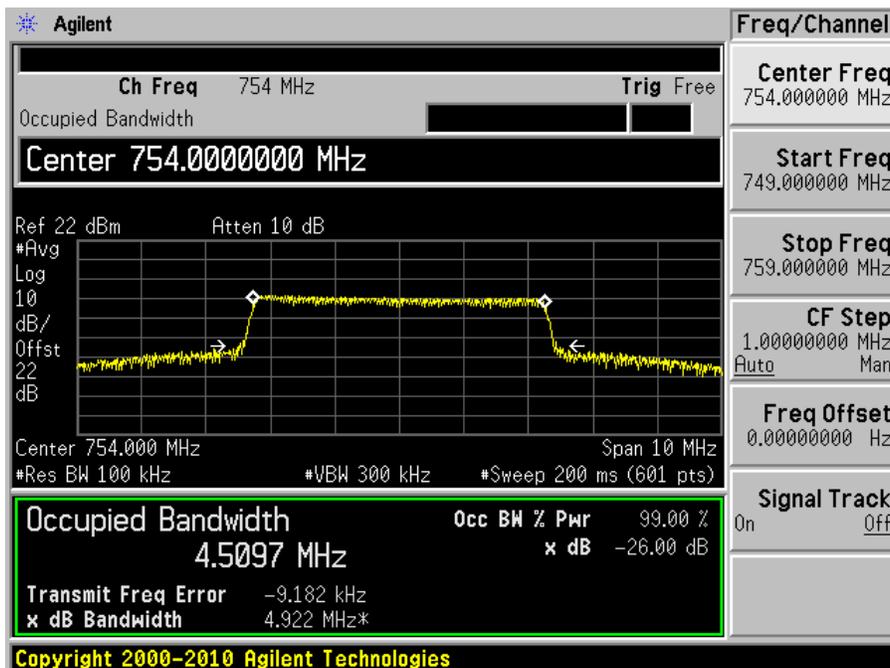


LTE-64QAM (5 MHz), Frequency: 754 MHz

Input

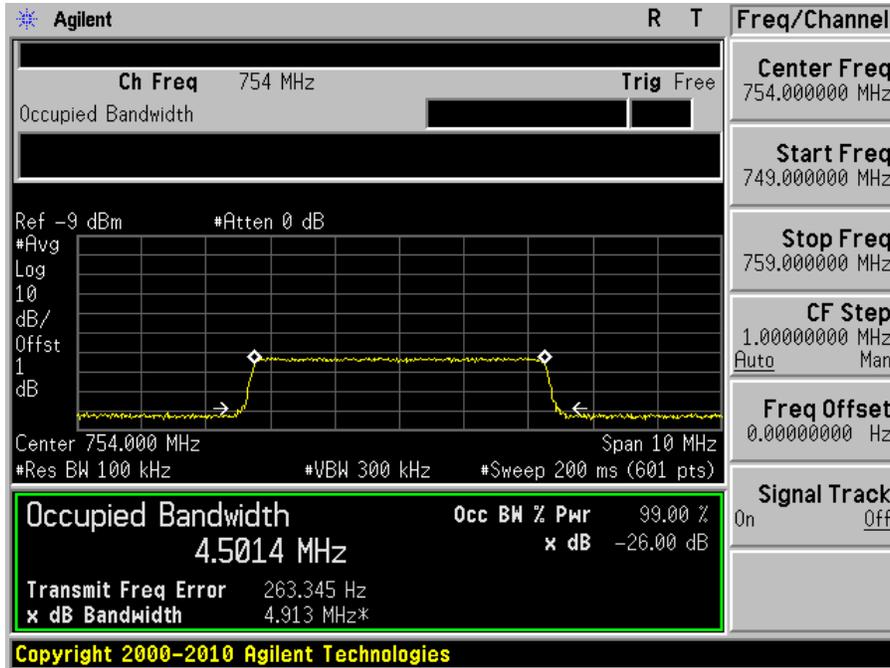


Output

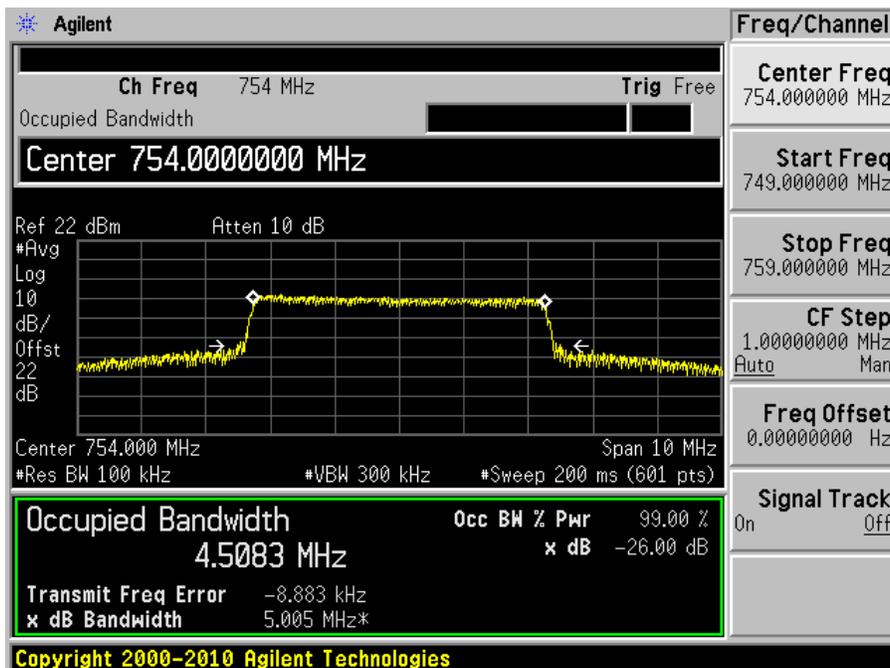


LTE-QPSK (10 MHz), Frequency: 752 MHz

Input

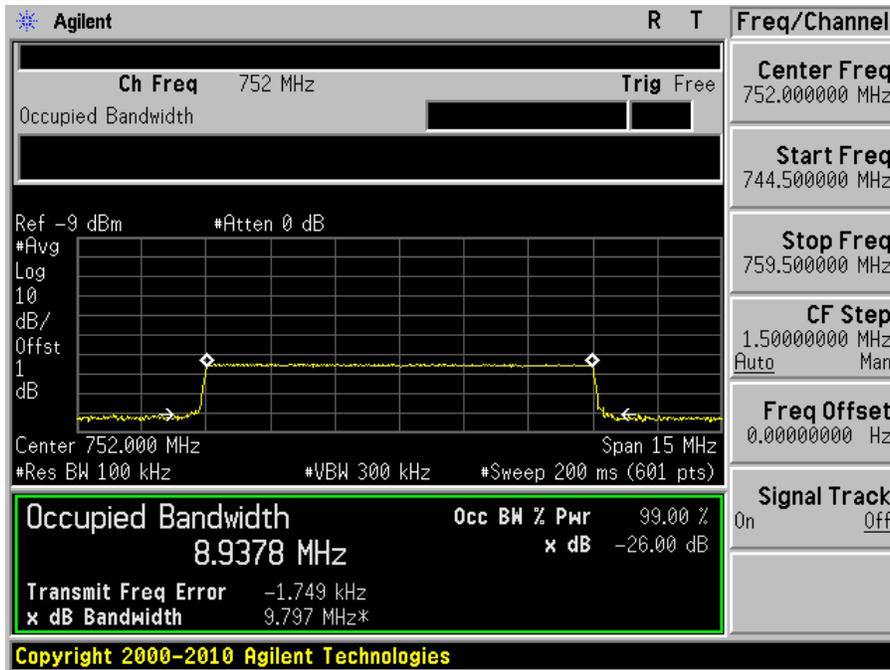


Output

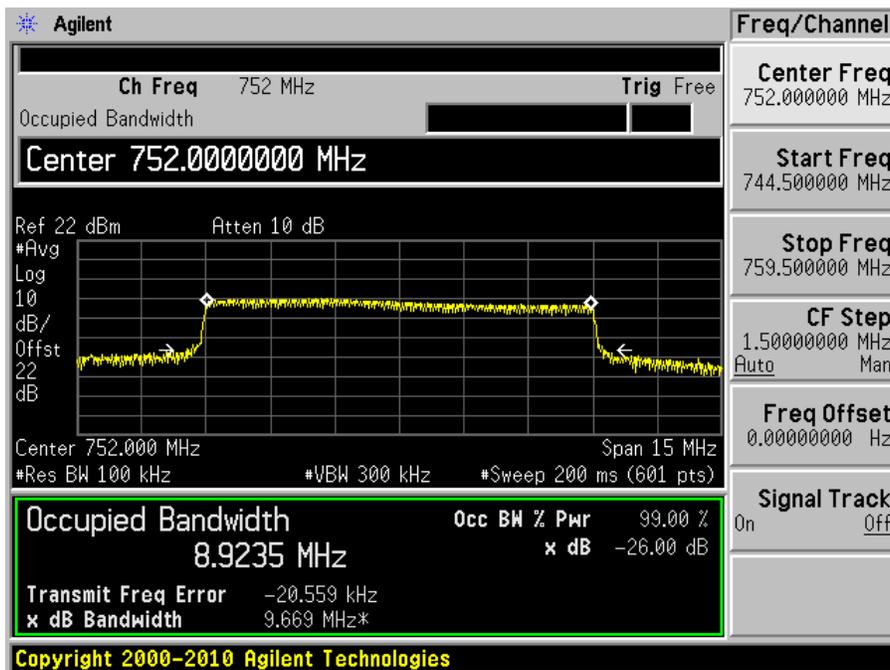


LTE-16QAM (10 MHz), Frequency: 752 MHz

Input

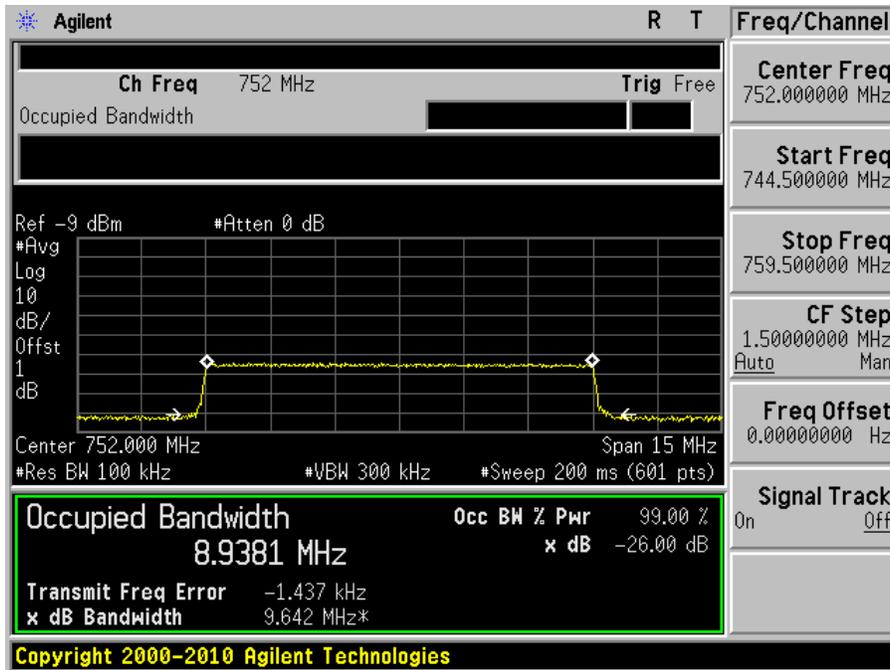


Output

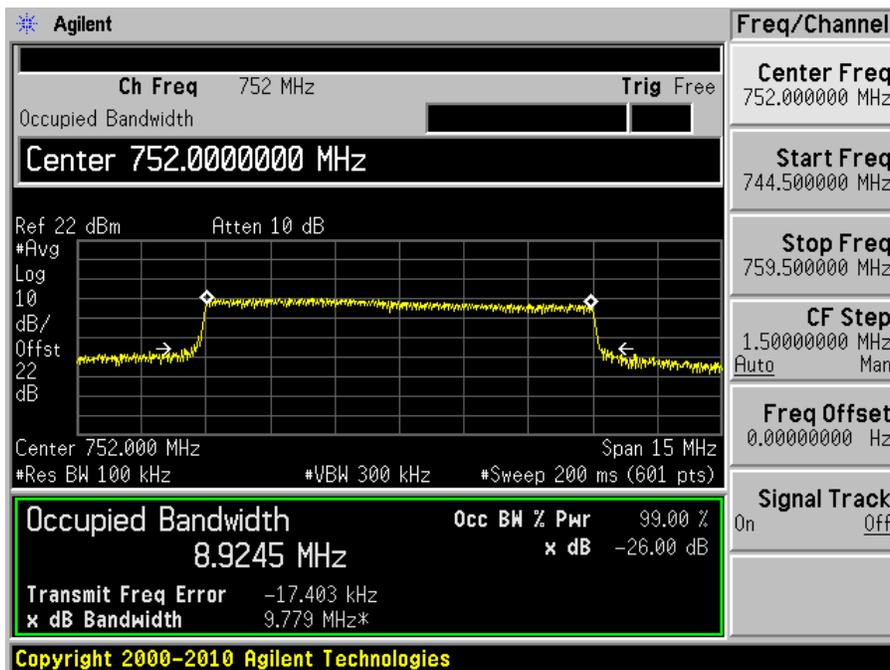


LTE-64QAM (10 MHz), Frequency: 752 MHz

Input

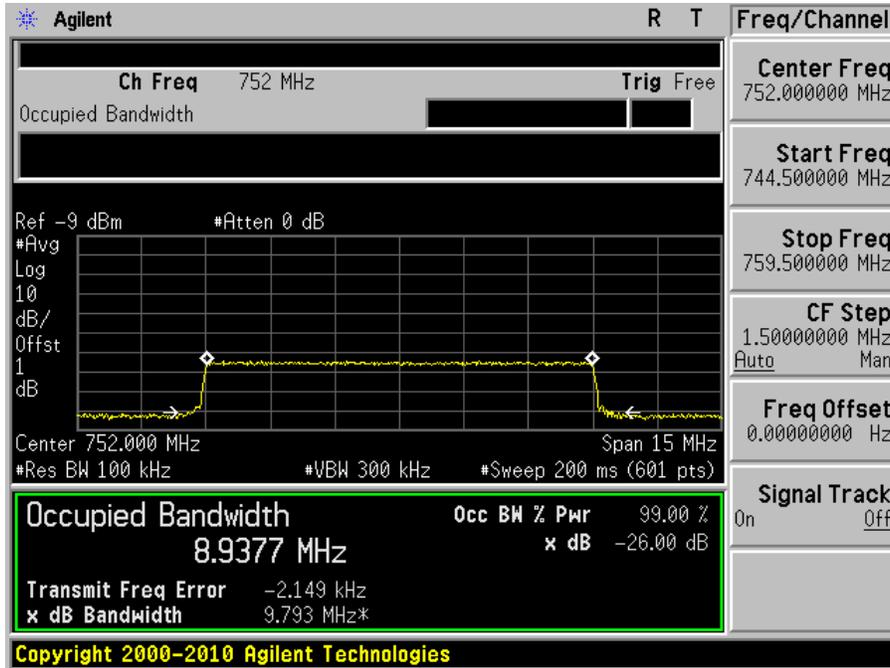


Output

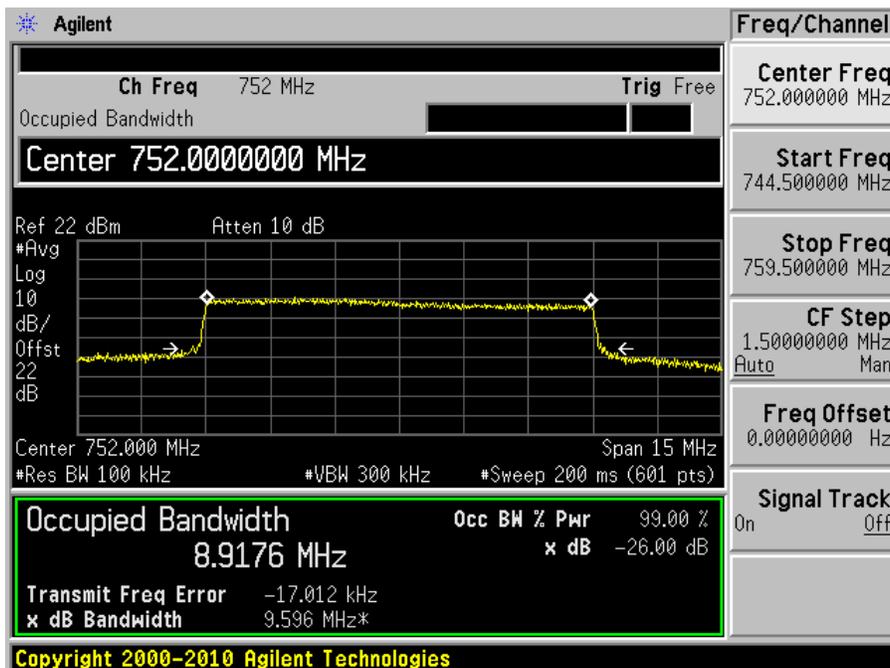


UL: 776-787 MHz

LTE-QPSK (1.4 MHz), Frequency: 782 MHz

Input

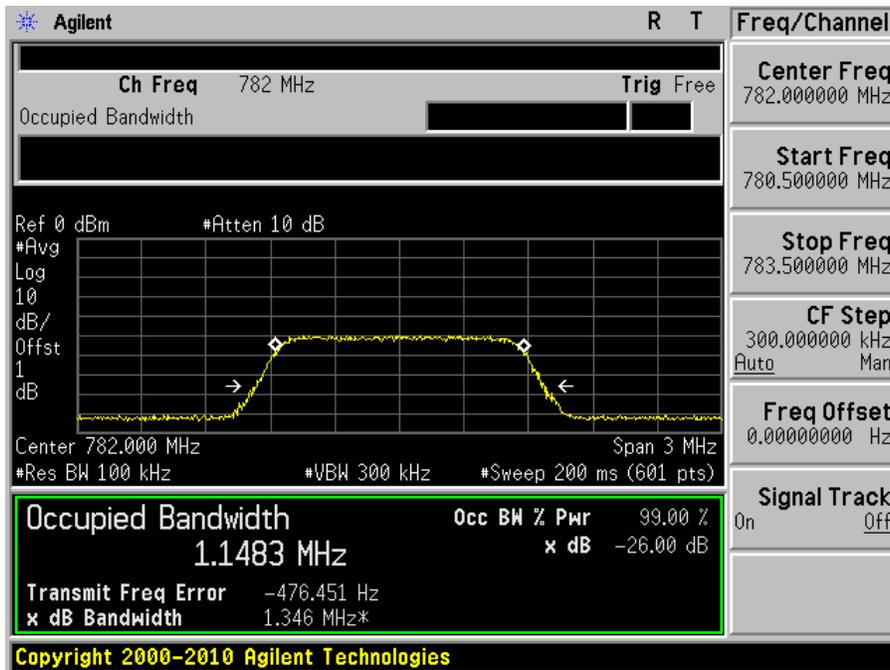


Output

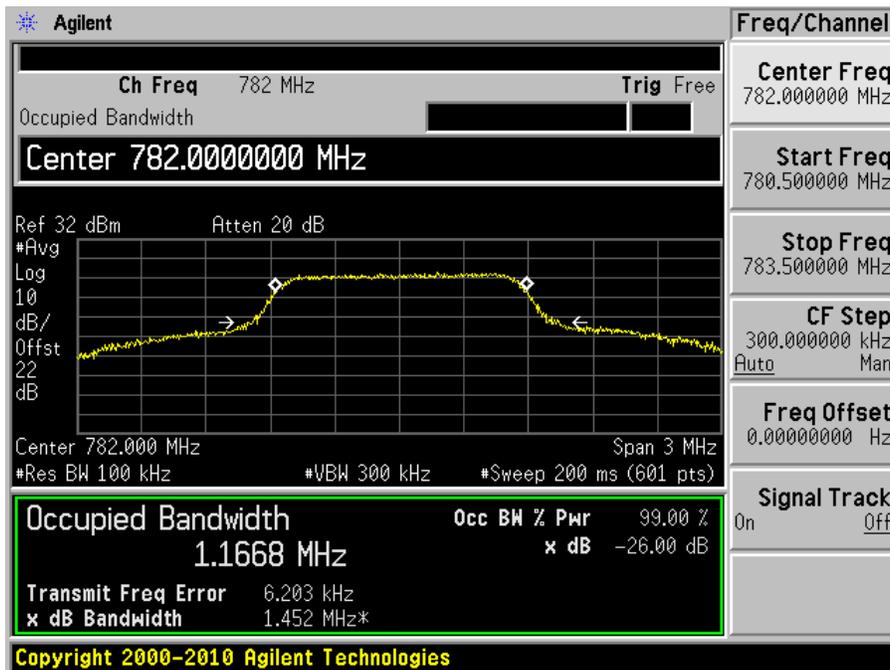


LTE-16QAM (1.4 MHz), Frequency: 782 MHz

Input

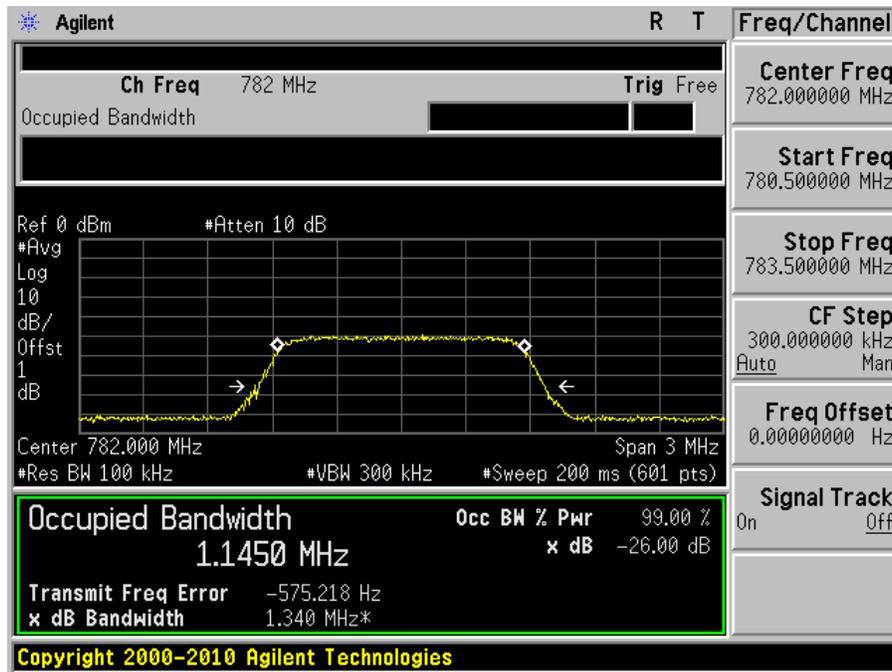


Output

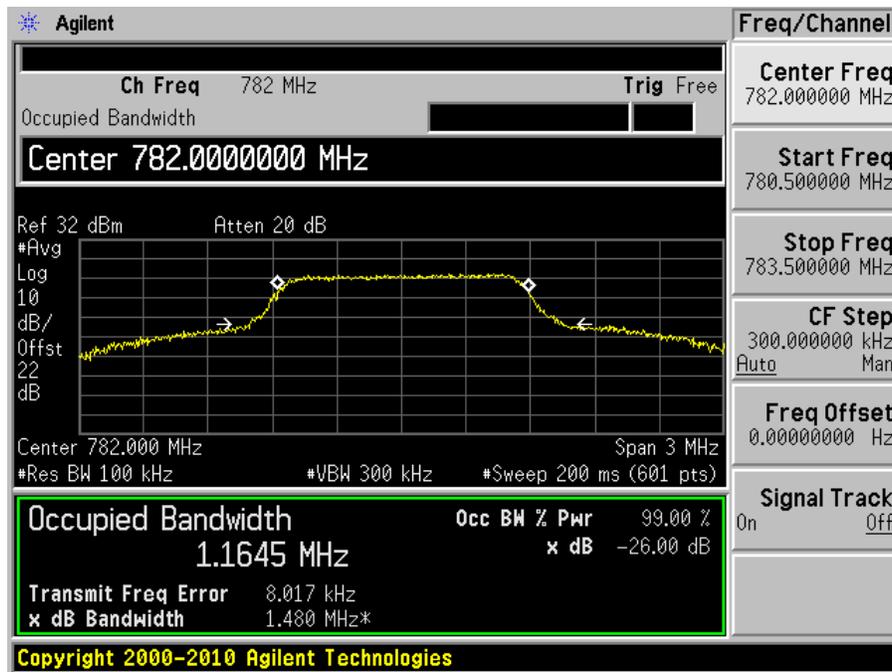


LTE-64QAM (1.4 MHz), Frequency: 782 MHz

Input

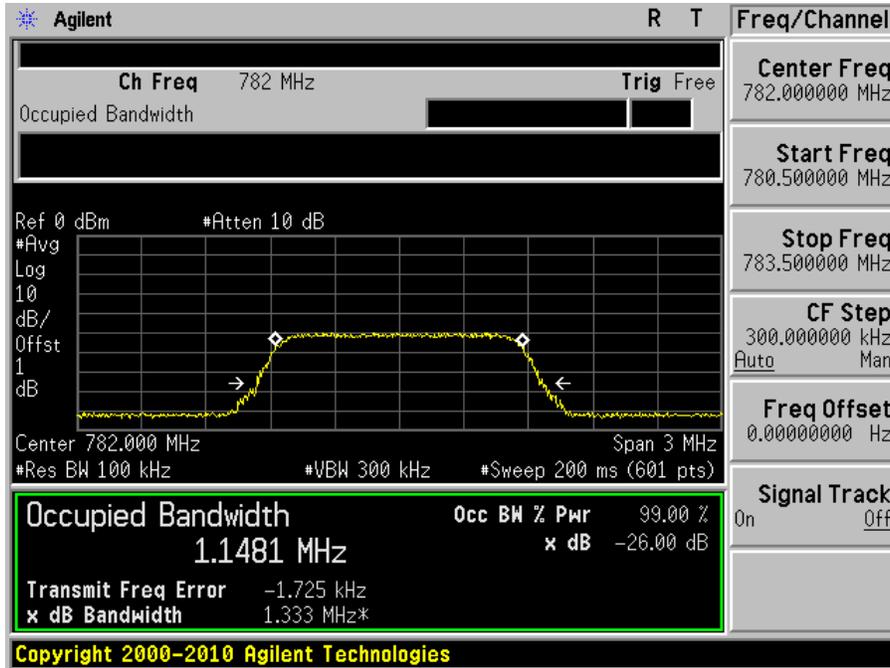


Output

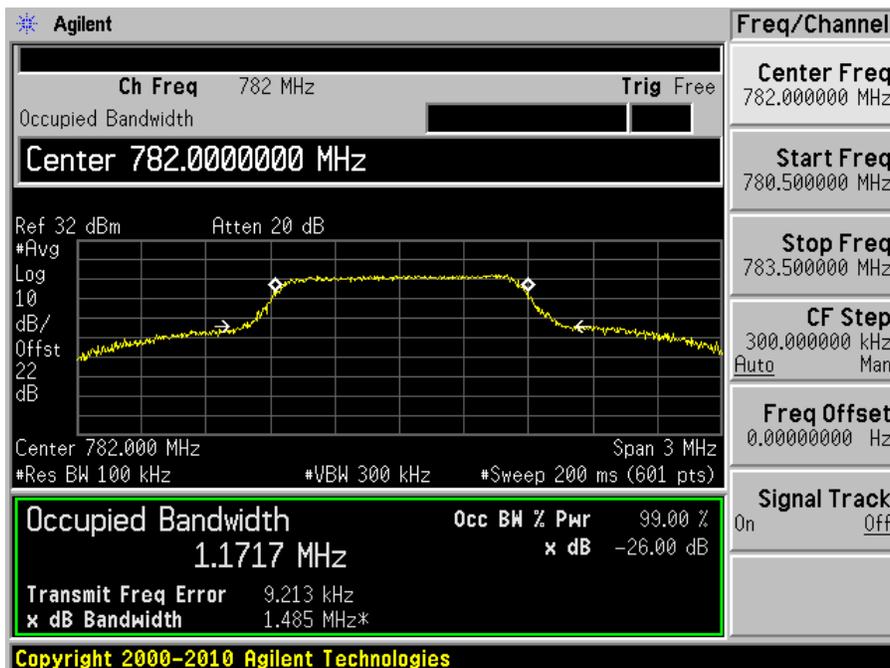


LTE-QPSK (3 MHz), Frequency: 782 MHz

Input

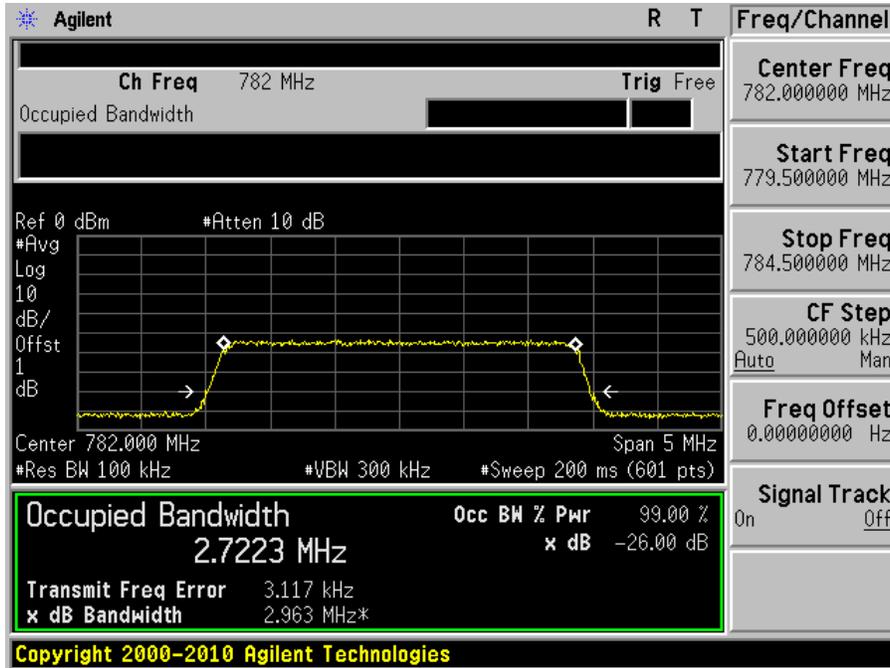


Output

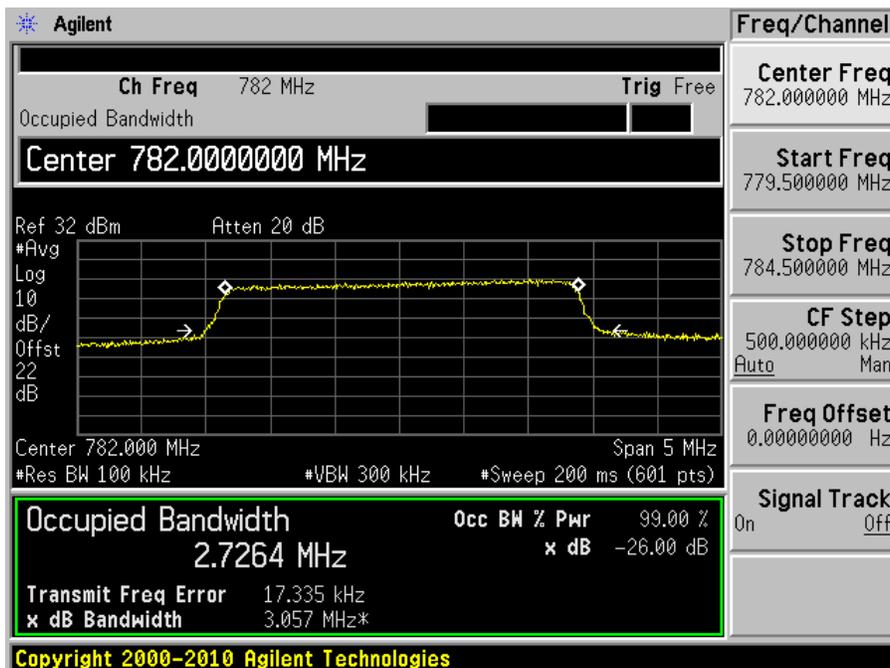


LTE-16QAM (3 MHz), Frequency: 782 MHz

Input

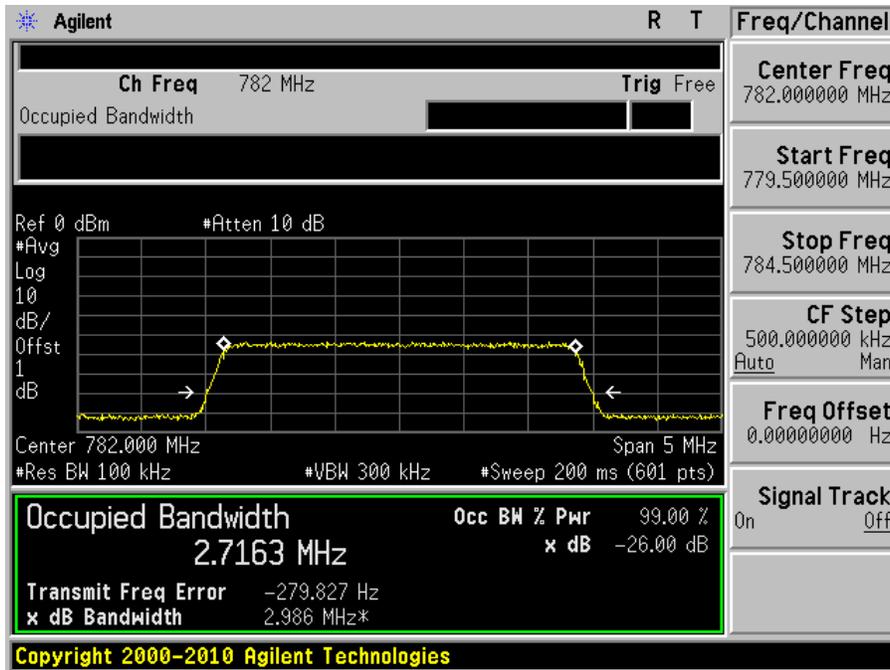


Output

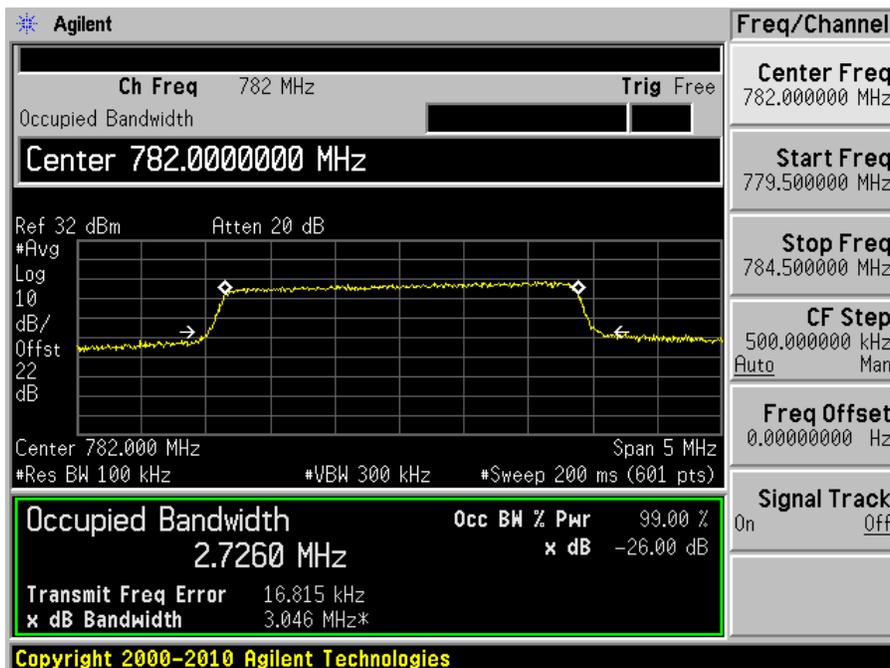


LTE-64QAM (3 MHz), Frequency: 782 MHz

Input

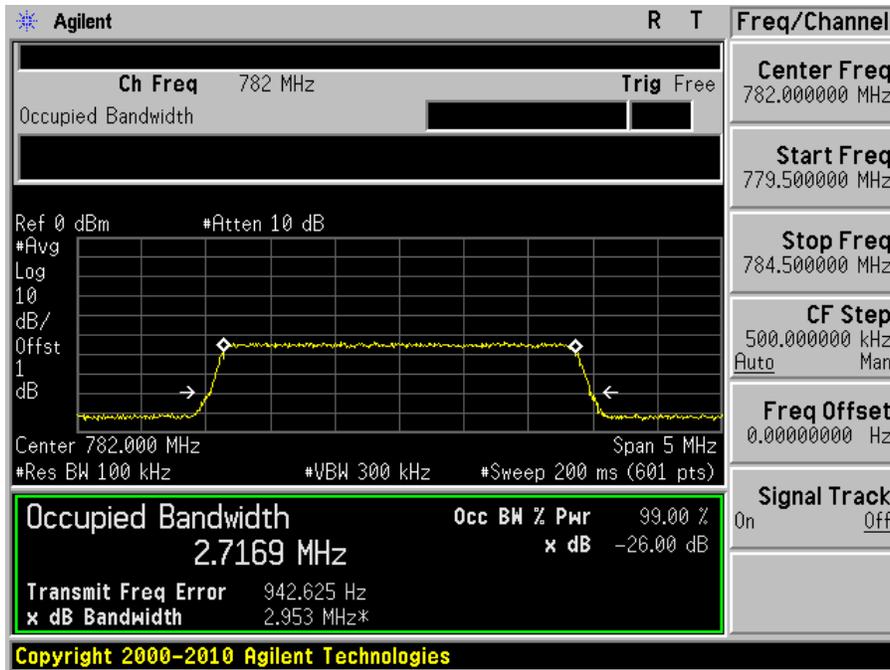


Output

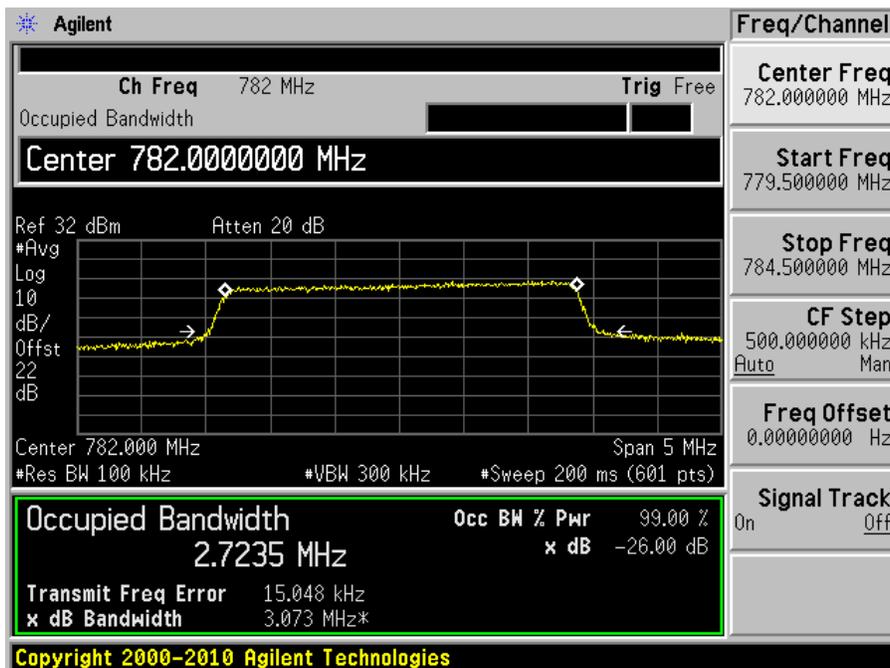


LTE-QPSK (5 MHz), Frequency: 784 MHz

Input

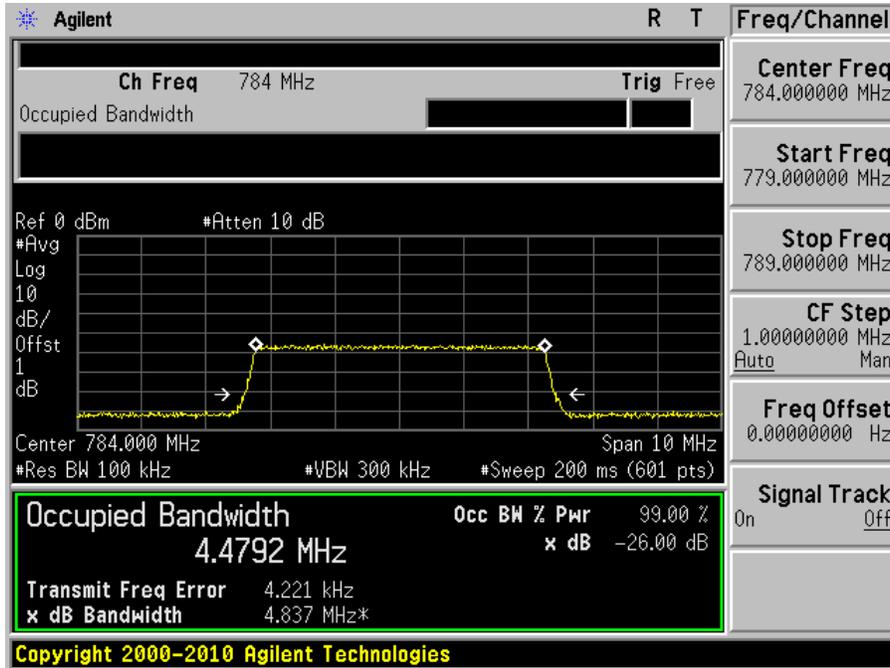


Output

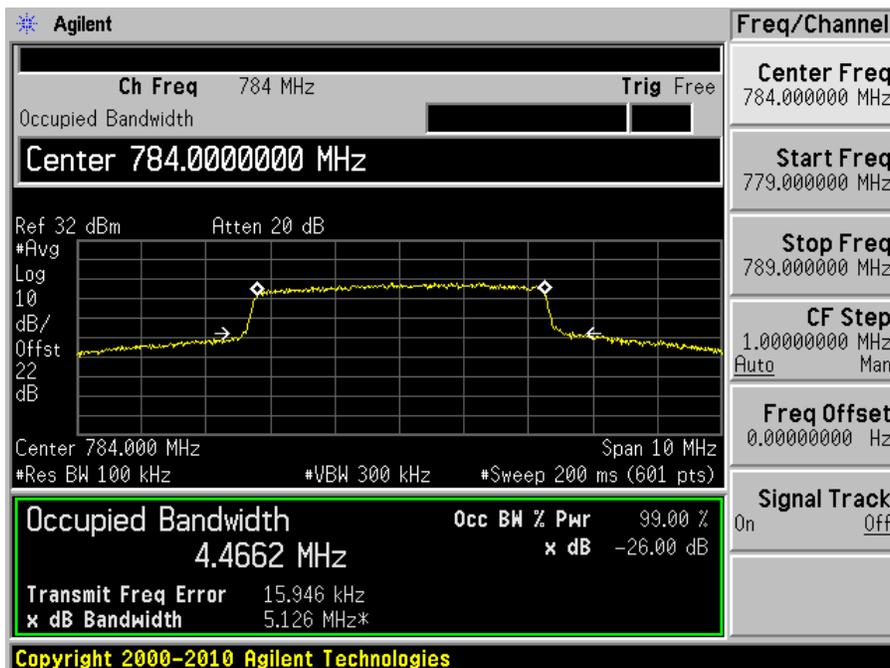


LTE-16QAM (5 MHz), Frequency: 784 MHz

Input

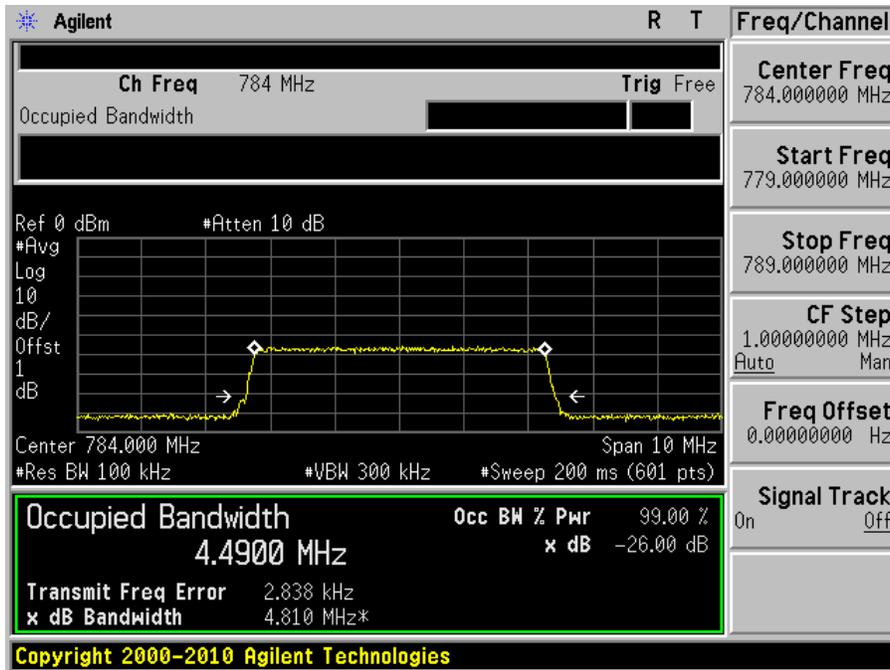


Output

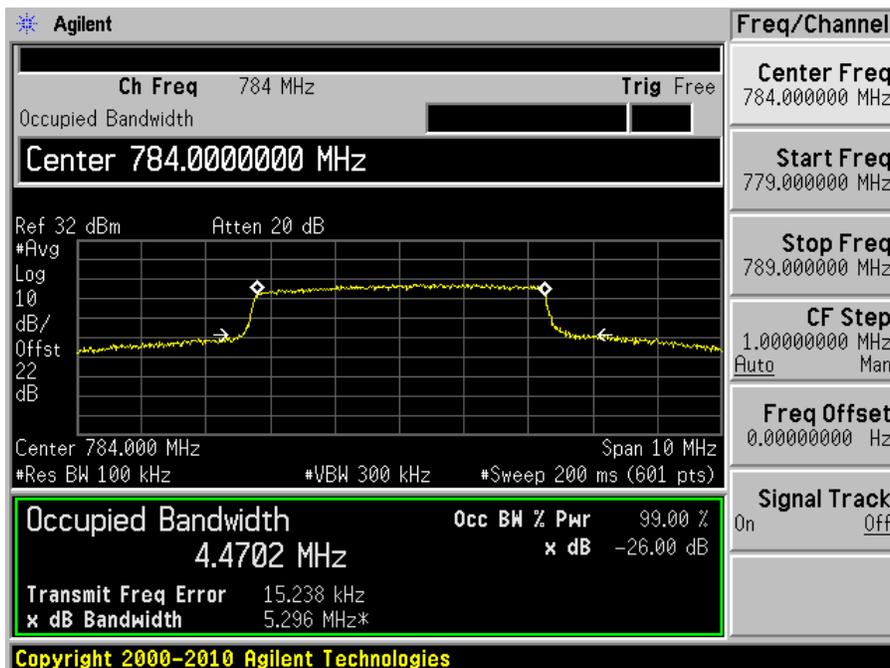


LTE-64QAM (5 MHz), Frequency: 784 MHz

Input

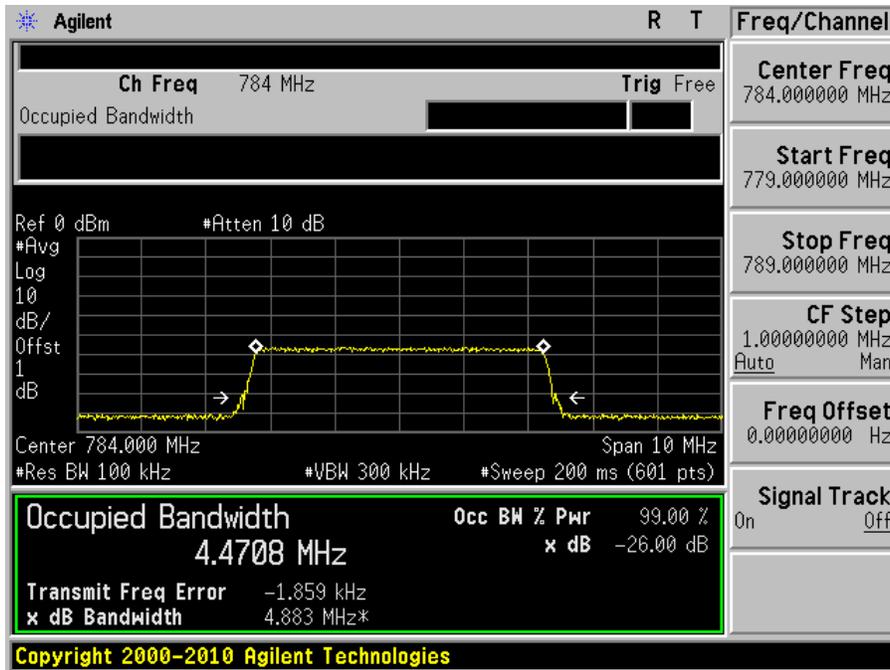


Output

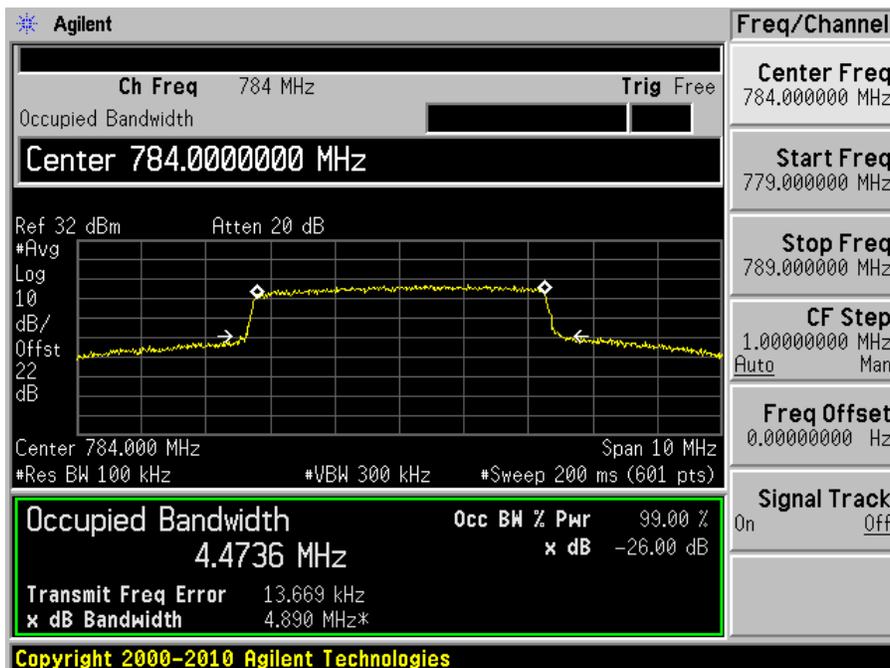


LTE-QPSK (10 MHz), Frequency: 782 MHz

Input

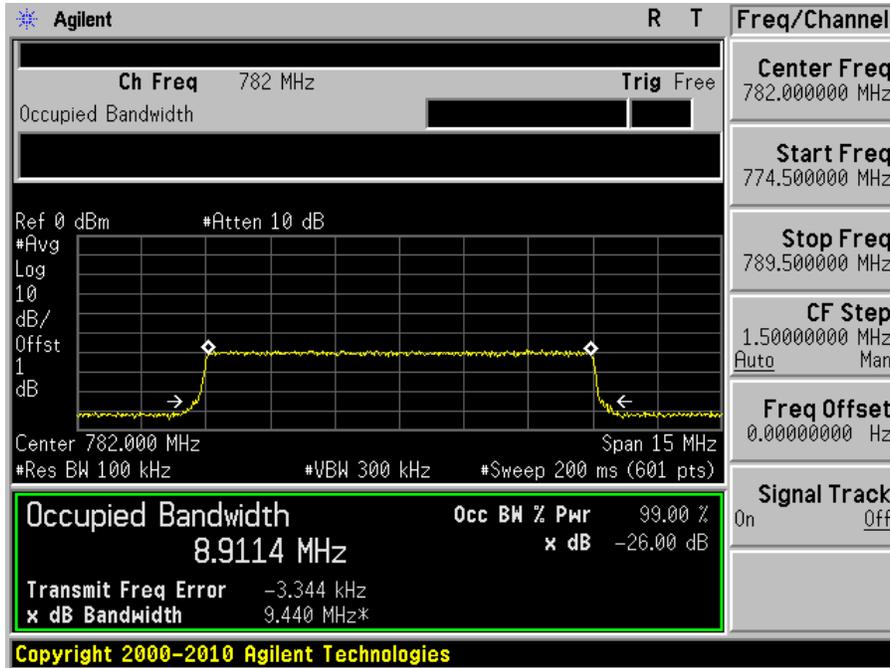


Output

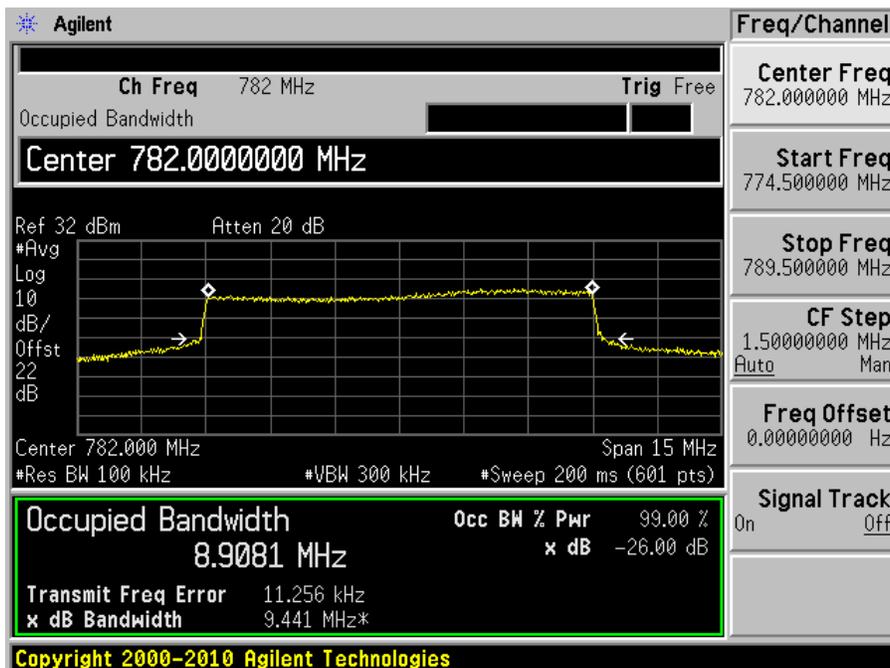


LTE-16QAM (10 MHz), Frequency: 782 MHz

Input

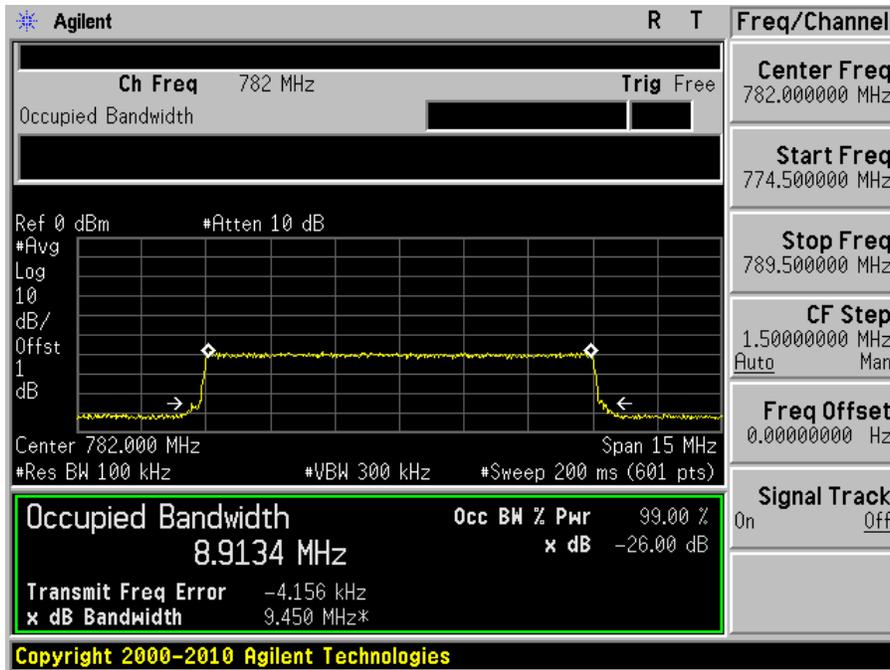


Output

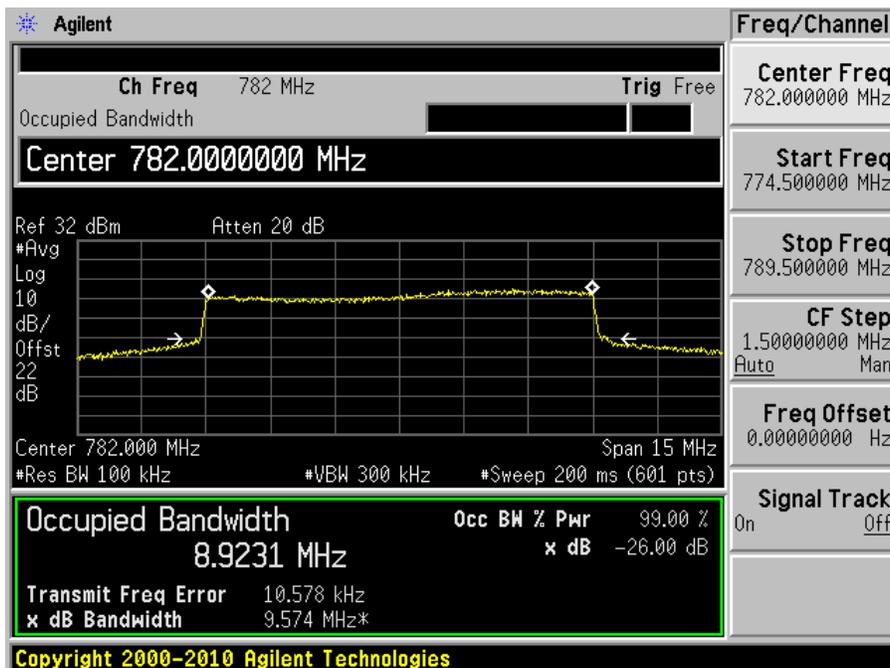


LTE-64QAM (10 MHz), Frequency: 782 MHz

Input

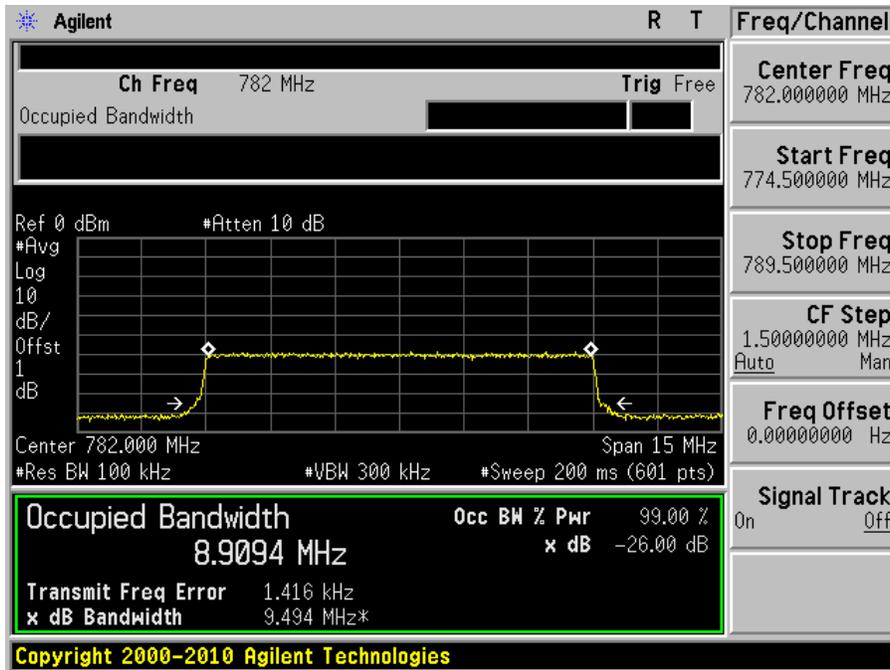

Output

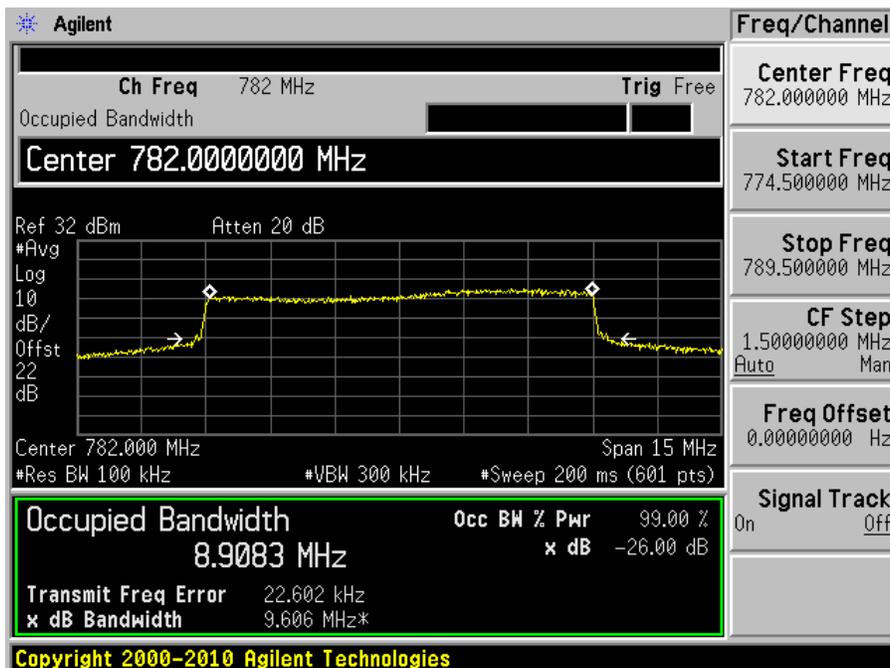

7 FCC §2.1053 & §27.53 - SPURIOUS RADIATED EMISSIONS

7.1 Applicable Standard

Requirements: FCC §2.1053, §27.53.

7.2 Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \log (\text{TX Power in Watts}/0.001)$ – the absolute level
 Spurious attenuation limit in dB = $43 + 10 \text{Log}_{10} (\text{power out in Watts})$

7.3 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
Agilent	Spectrum Analyzer	E4440A	US45303156	2010-08-09
Agilent	Signal Generator	E4438C	MY45091309	2011-04-28
Rohde & Schwarz	EMI Test Receiver	ESCI 1166.5950K03	100337	2011-03-21
Sunol Science Corp	System Controller	SC99V	122303-1	N/R
Sunol Science Corp	Combination Antenna	JB3	A0020106-3	2010-06-16
Hewlett Packard	Pre amplifier	8447D	2944A06639	2010-06-18
A.R.A Inc	Horn antenna	DRG-1181A	1132	2010-11-29
Mini-Circuits	Pre Amplifier	ZVA-183-S	570400946	2011-05-09

Statement of Traceability: **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

7.4 Test Environmental Conditions

Temperature:	20-25°C
Relative Humidity:	39-44 %
ATM Pressure:	101-102 kPa

The testing was performed by Jack Liu from 2011-05-23 to 2011-05-26 at Chamber3.

7.5 Summary of Test Results

The worst case reading as follows:

Technology	Frequency Bands	Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Frequency Range
LTE	DL:746-757 MHz	Note ¹	-	-	30 MHz – 22 GHz
	UL: 776-787 MHz	Note ¹	-	-	30 MHz – 22 GHz

Note ¹: All harmonics were on the noise floor level and/or 20 dB below the limit.
All digital signals were tested on another standard.

7.6 Test Results

DL: 746-757 MHz

Modulation: CW Signal – 752 MHz (Scan from 30 MHz to 22 GHz @ 3 Meter Distance)

Indicated		Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Gain Correction (dB)	Cable Loss (dB)	Absolute Level (dBm)		
-	-	-	-	-	-	-	-	-	-	-	Note ¹

UL: 776-787 MHz

Modulation: CW Signal – 782 MHz (Scan from 30 MHz to 22 GHz @ 3 Meter Distance)

Indicated		Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Gain Correction (dB)	Cable Loss (dB)	Absolute Level (dBm)		
-	-	-	-	-	-	-	-	-	-	-	Note ¹

Note ¹: All harmonics were on the noise floor level and/or 20 dB below the limit.
All digital signals were tested on another standard.

8 FCC §2.1051 & §27.53 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

8.1 Applicable Standard

Requirements: FCC §2.1051 & §27.53.

The spectrum shall be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1057.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB

8.2 Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

8.3 Test Equipment List and Details

Manufacturers	Descriptions	Models	Serial Numbers	Calibration Dates
Agilent	ESG-D Series Signal Generator	E4438C	MY45091309	2011-04-28
Agilent	Spectrum Analyzer	E4446A	US44300386	2010-08-18

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

8.4 Test Environmental Conditions

Temperature:	20-25°C
Relative Humidity:	39-44 %
ATM Pressure:	101-102 kPa

The testing was performed by Jack Liu from 2011-05-23 to 2011-05-26 at RF Site.


8.5 Test Results

Please refer to the following plots.


DL: 746-757 MHz

Modulation: CW Signal, Frequency: 752 MHz

Plot 1: 30 MHz to 1 GHz

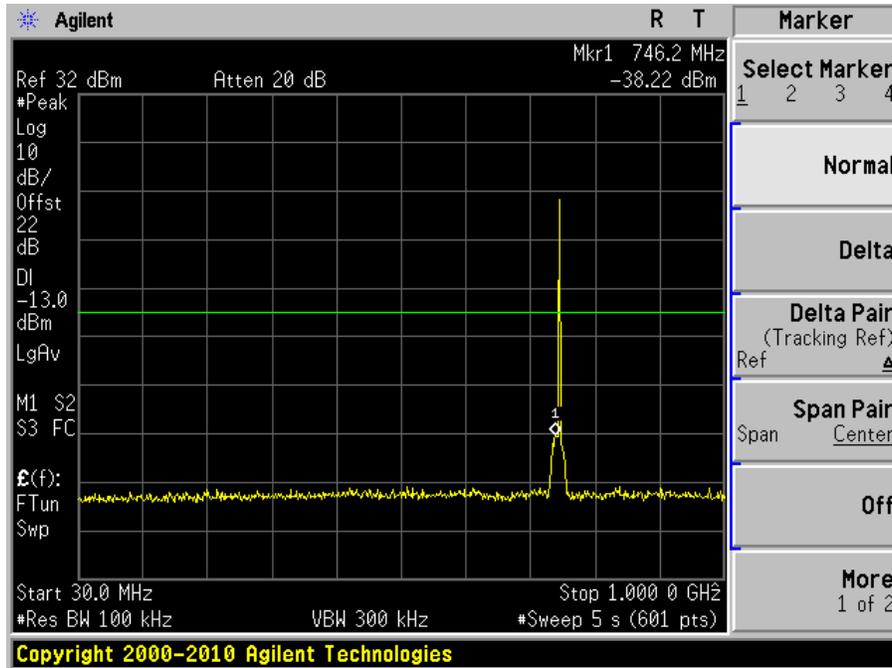


Plot 2: Above 1 GHz

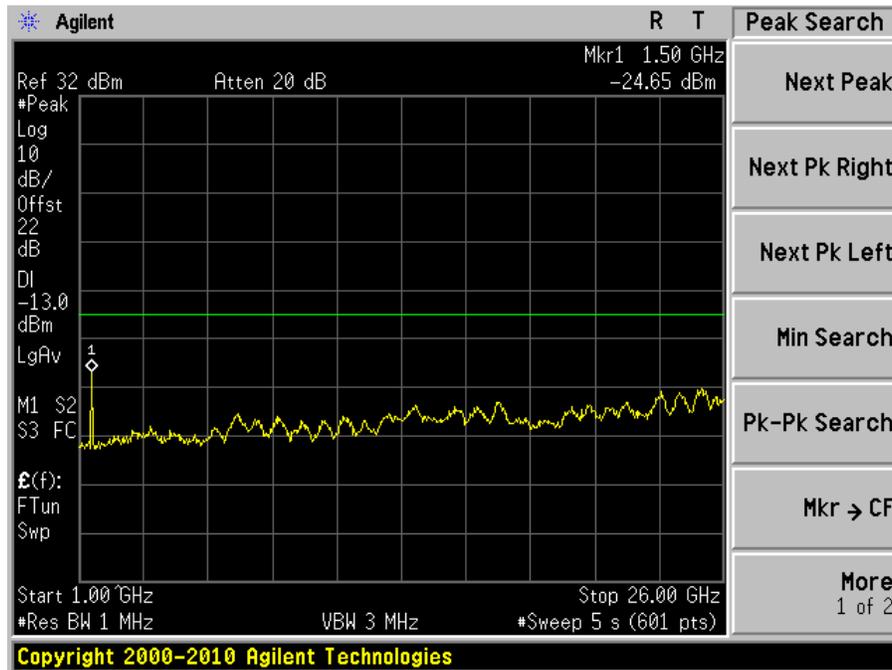


Inter-Modulation:

Lowest Channel

Input

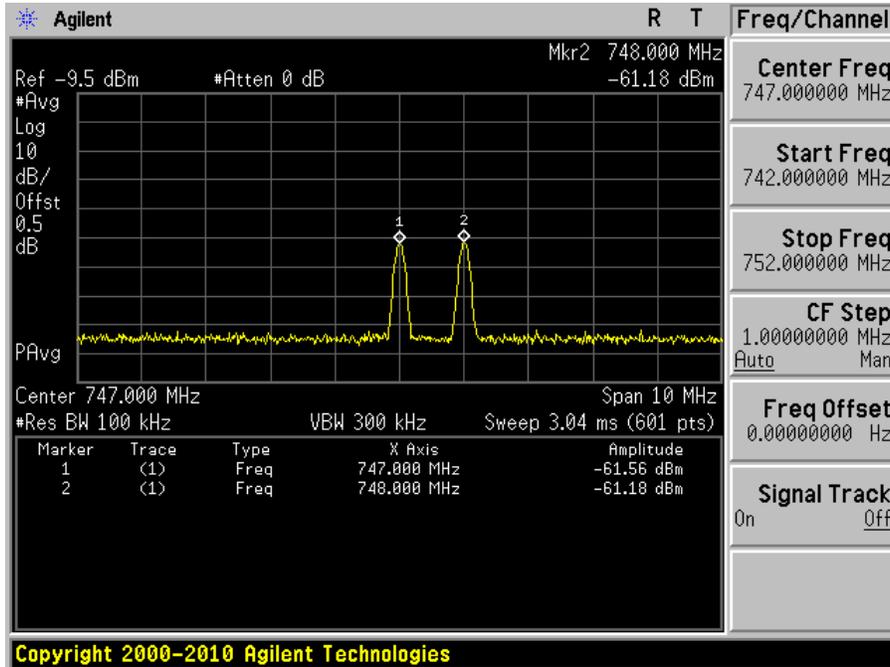


Output

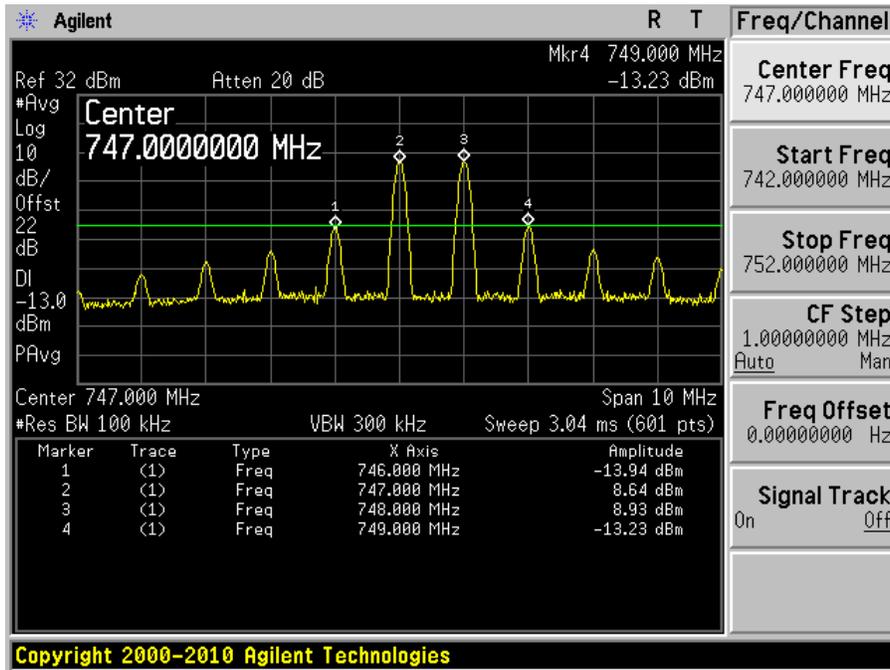


Middle Channel

Input

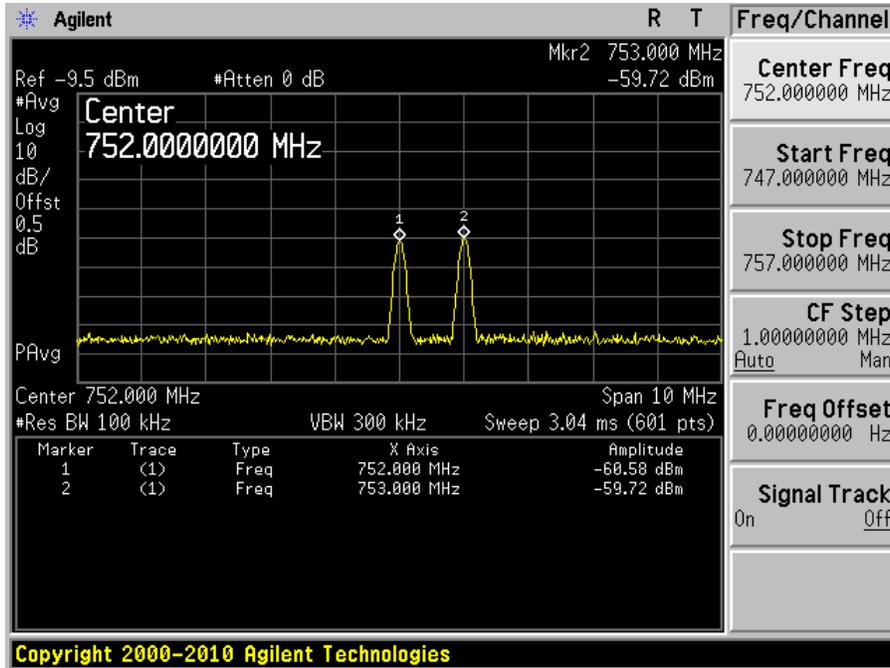


Output

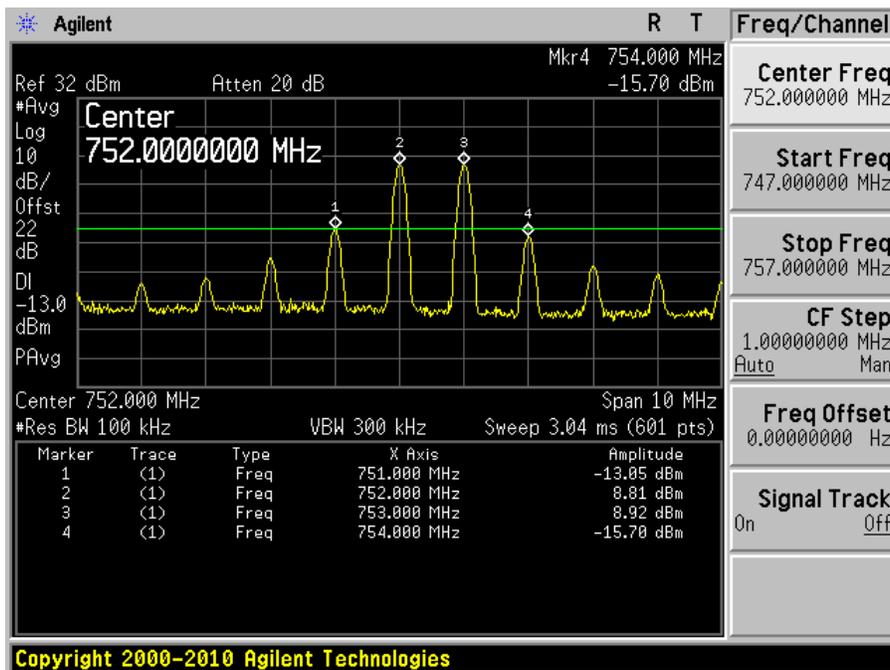


Highest Channel

Input

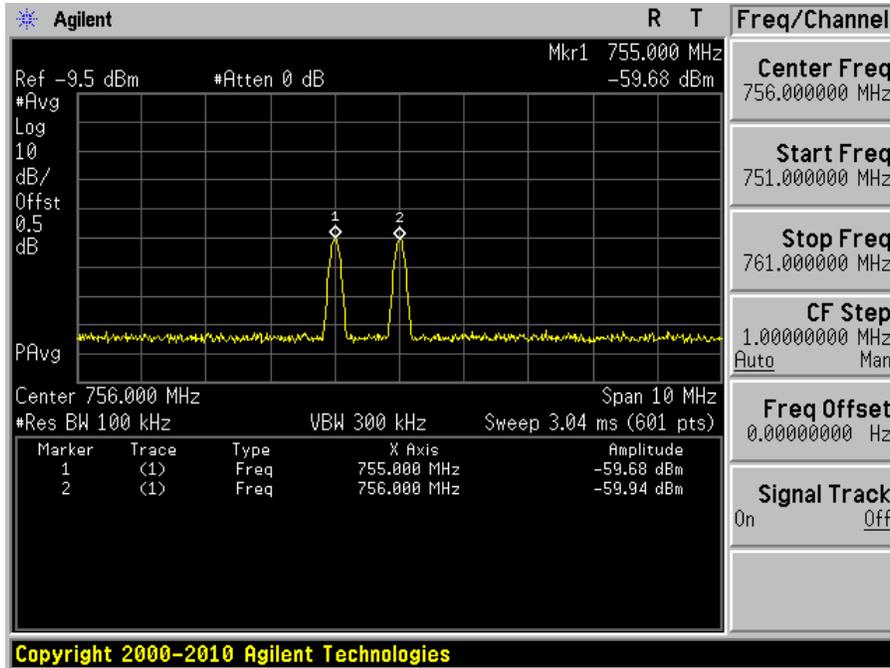


Output

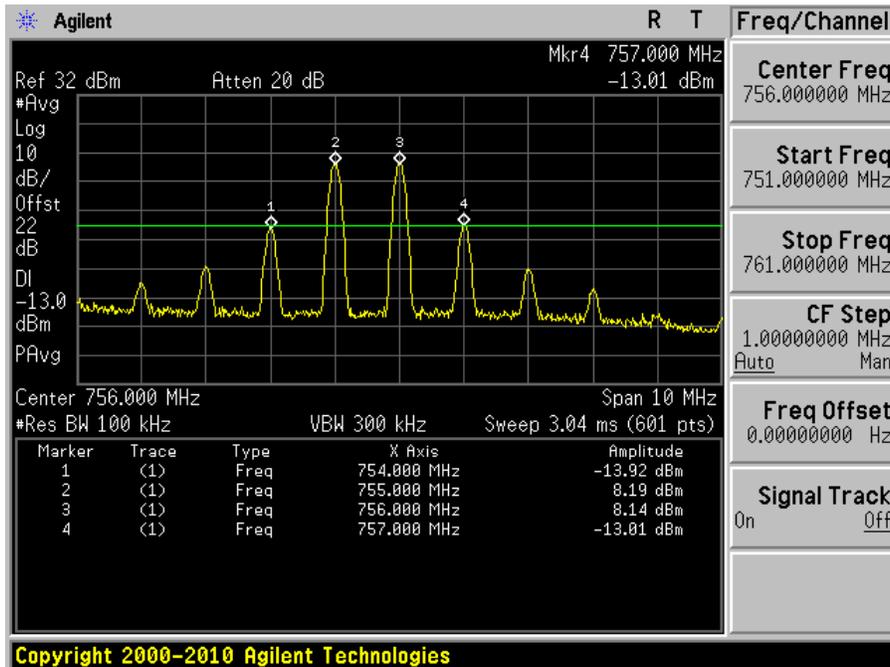


UL: 776-787 MHz

Modulation: CW Signal, Frequency: 782 MHz

Plot 1: 30 MHz to 1 GHz

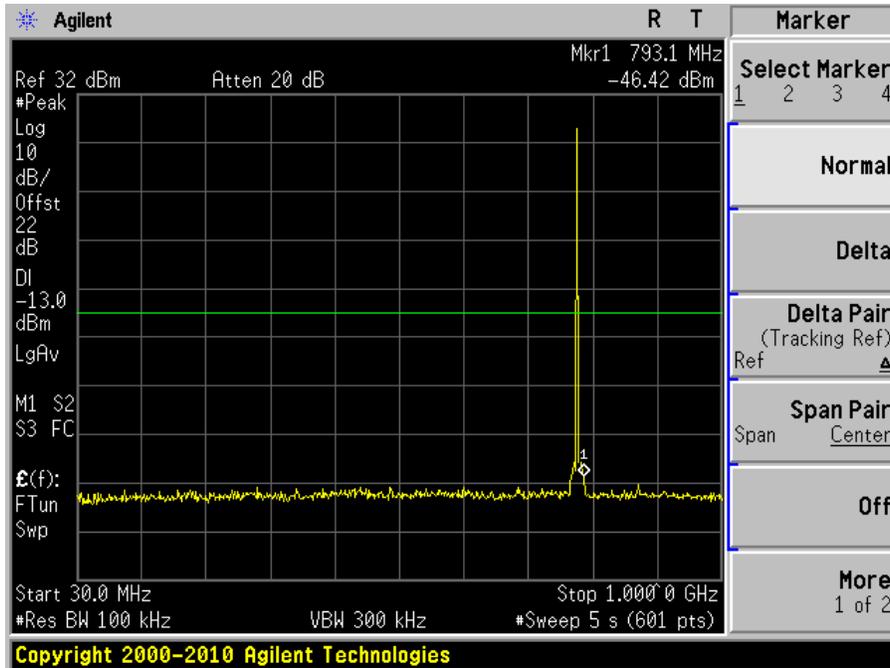


Plot 2: Above 1 GHz

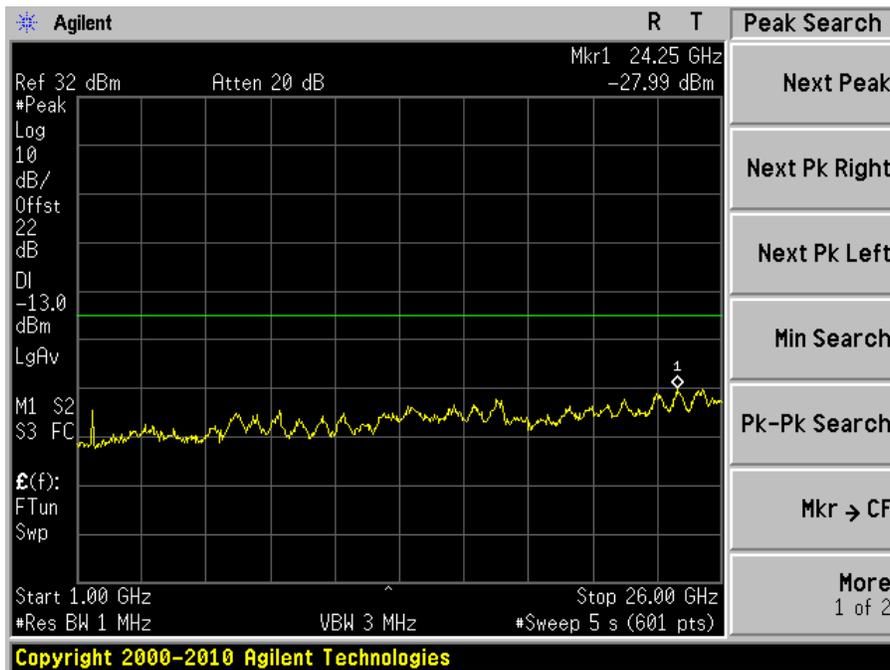


Inter-modulation:

Lowest Channel

Input

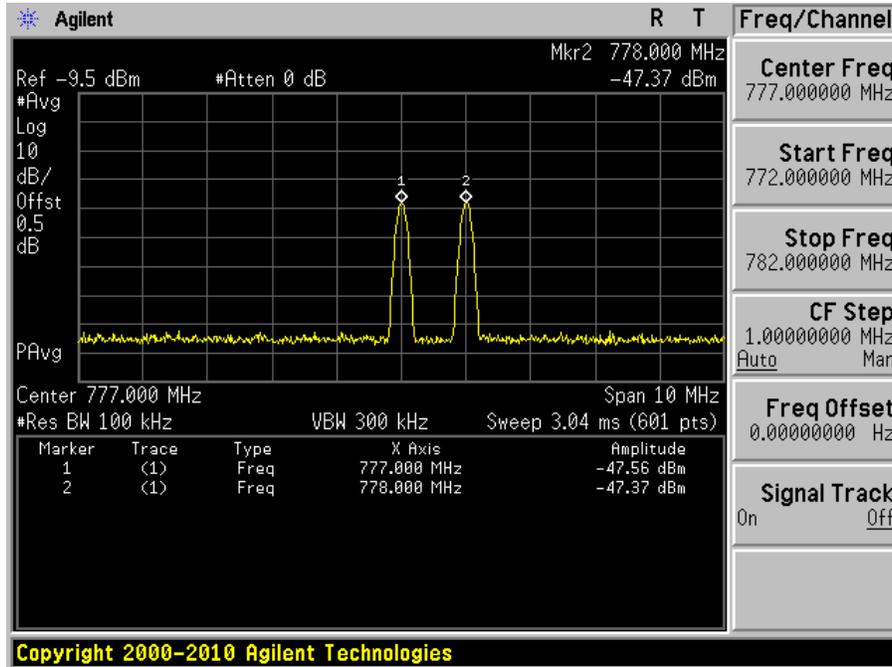


Output

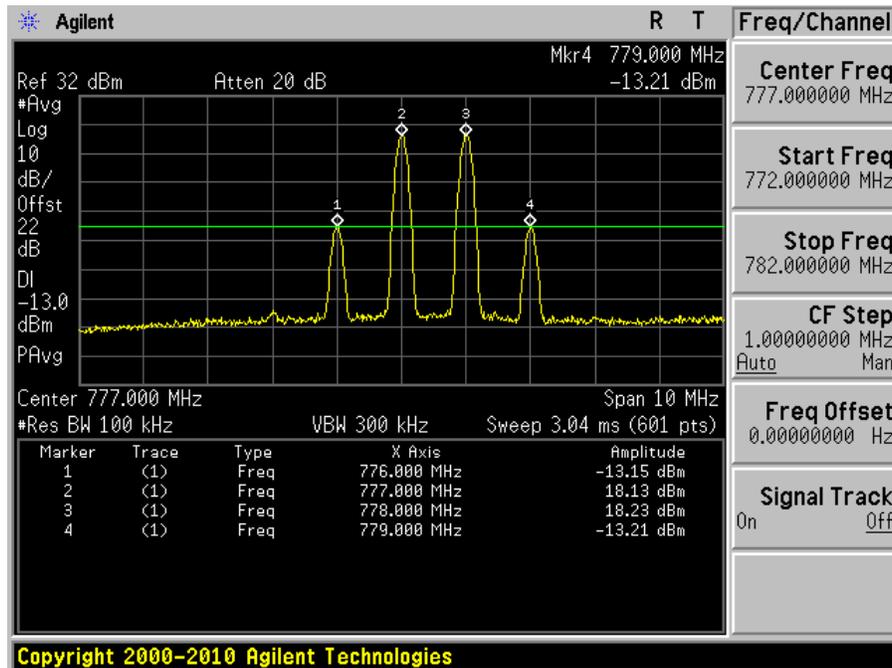


Middle Channel

Input

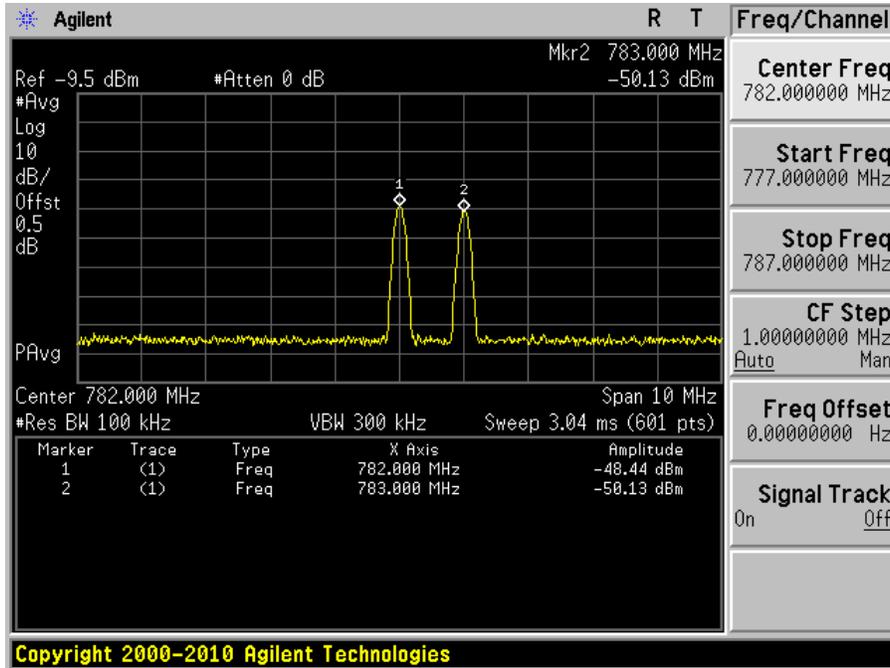


Output

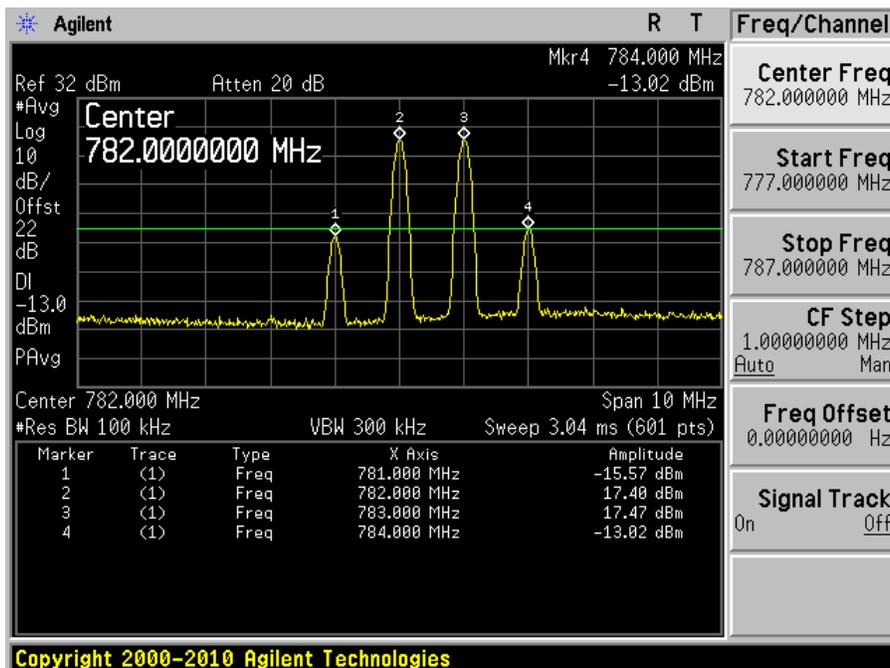


Highest Channel

Input

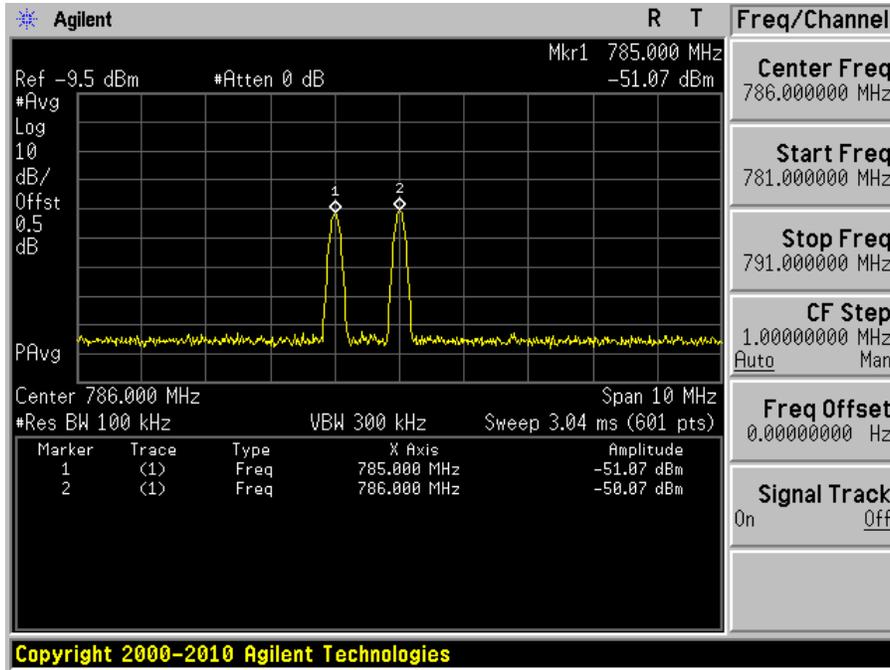

Output

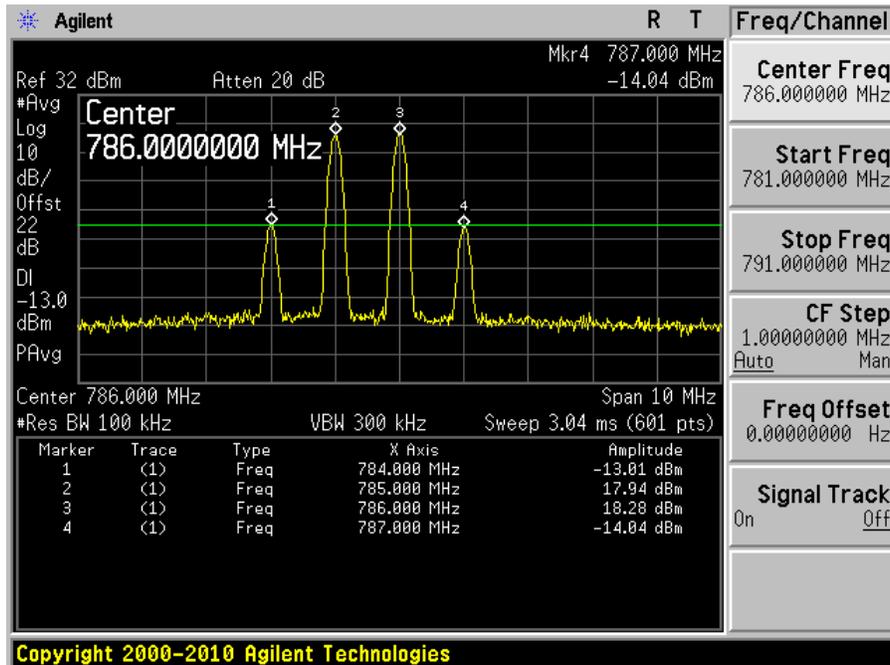

9 FCC §27.53 – BAND EDGE

9.1 Applicable Standard

According to FCC §27.53, the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

9.2 Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

9.3 Test Equipment List and Details

Manufacturers	Descriptions	Models	Serial Numbers	Calibration Dates
Agilent	ESG-D Series Signal Generator	E4438C	MY45091309	2011-04-28
Agilent	Spectrum Analyzer	E4446A	US44300386	2010-08-18

Statement of Traceability: **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

9.4 Test Environmental Conditions

Temperature:	20-25°C
Relative Humidity:	39-44 %
ATM Pressure:	101-102 kPa

The testing was performed by Jack Liu from 2011-05-23 to 2011-05-26 at RF Site.


9.5 Test Results

Please refer to the following plots.


DL: 746-757 MHz

Modulation: LTE-QPSK (1.4 MHz):

Plot 1: Lowest Edge

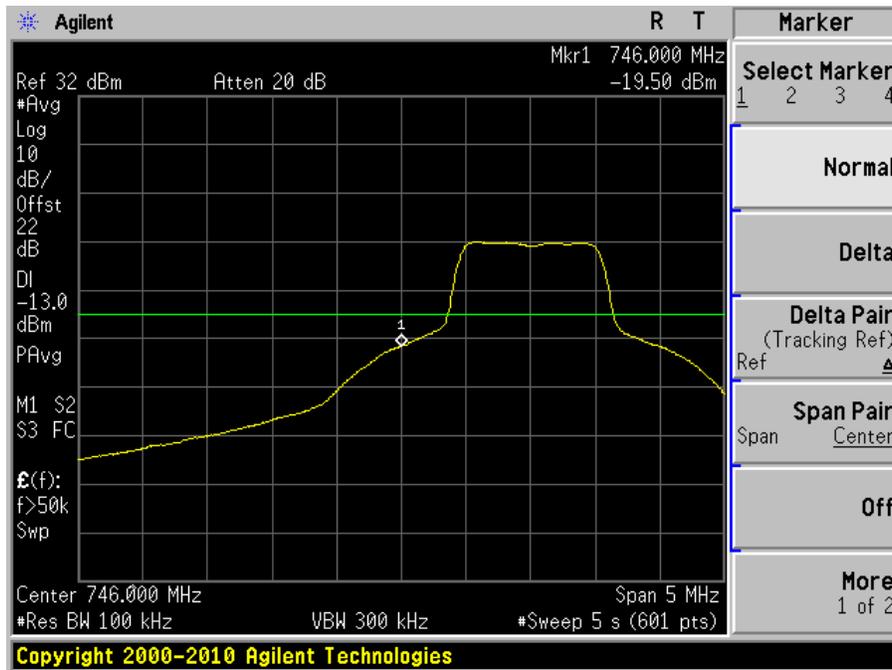


Plot 2: Highest Edge

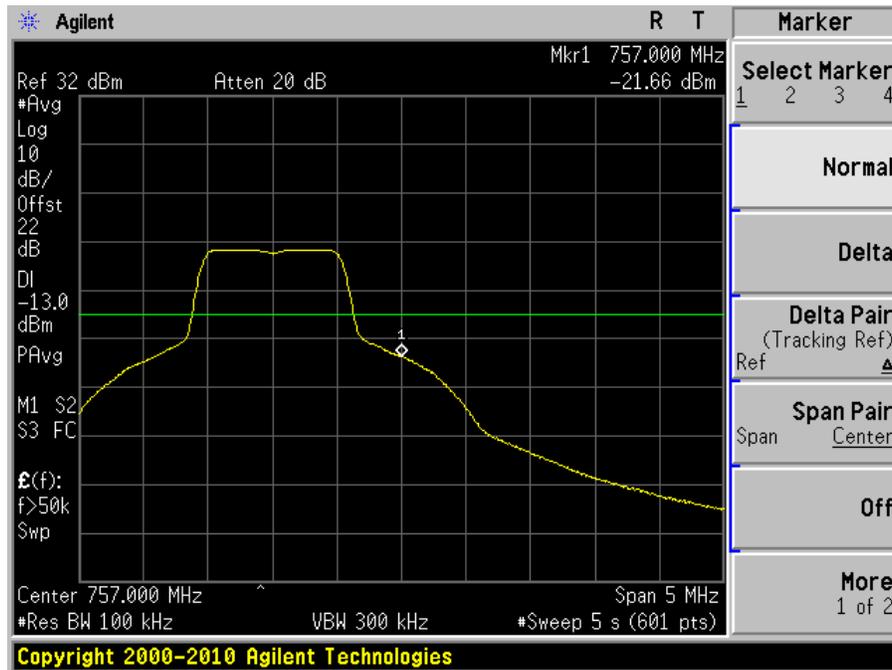


Modulation: LTE-16QAM (1.4 MHz):

Plot 1: Lowest Edge

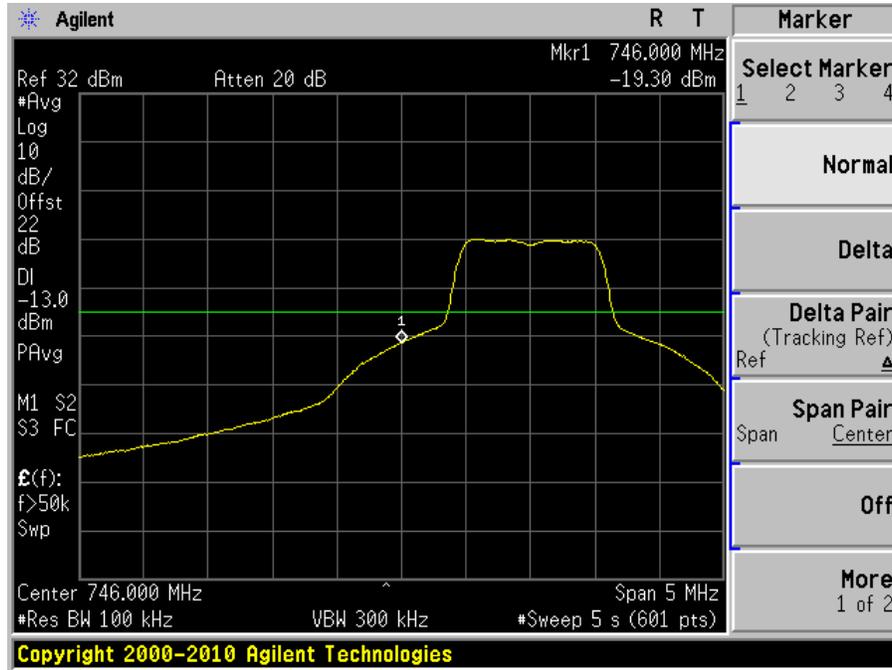


Plot 2: Highest Edge

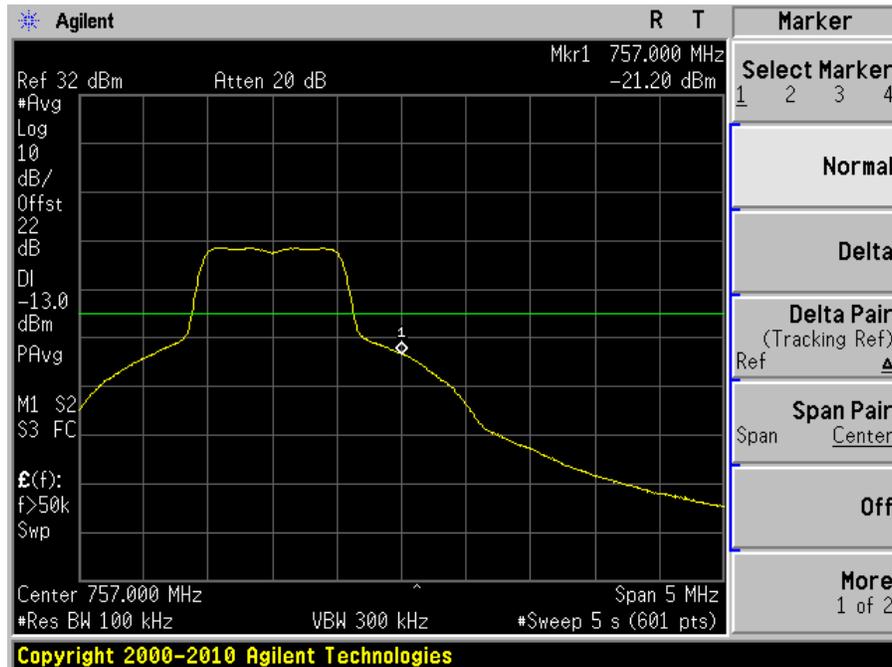


Modulation: LTE-64QAM (1.4 MHz):

Plot 1: Lowest Edge

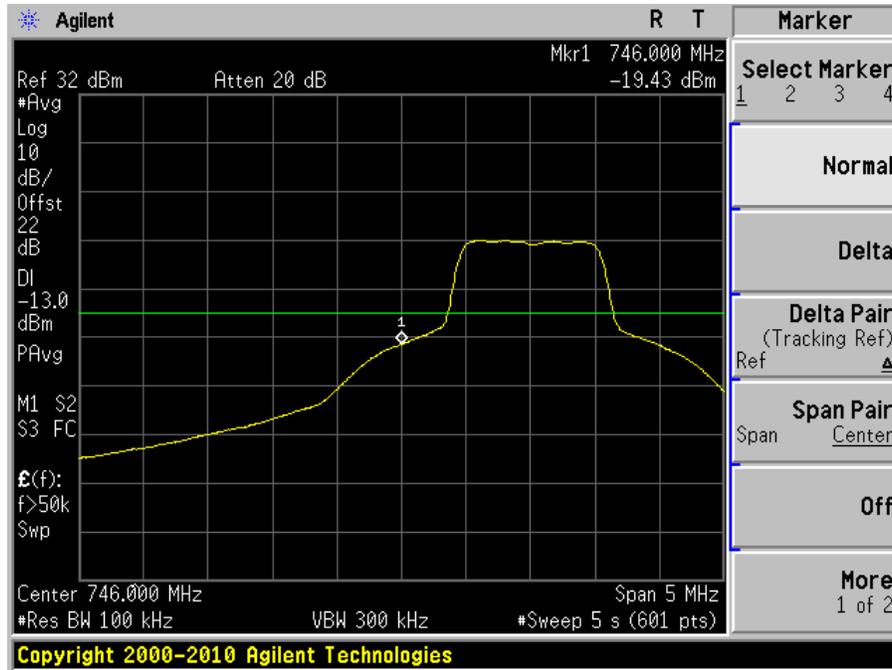


Plot 2: Highest Edge

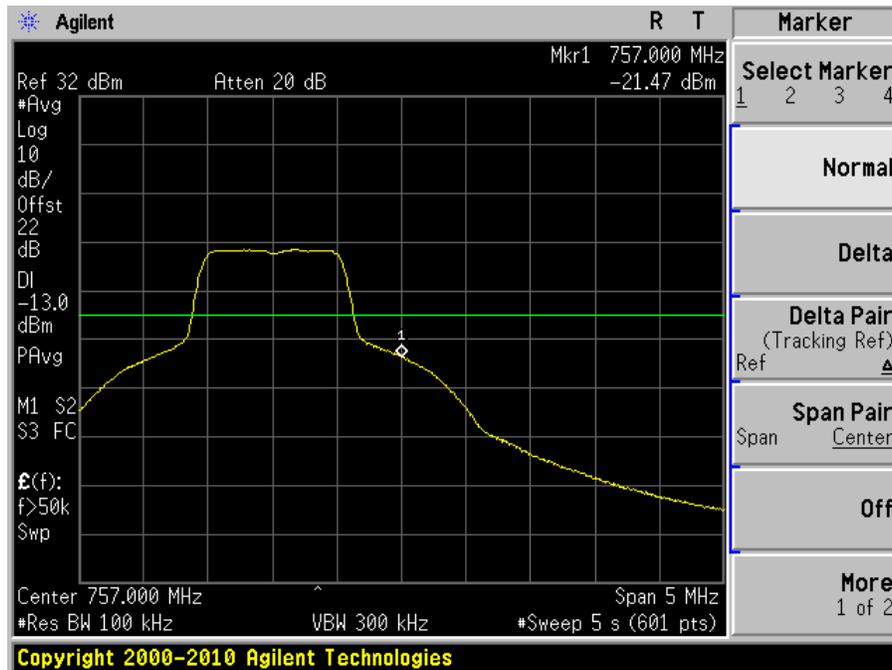


Modulation: LTE-QPSK (3 MHz):

Plot 1: Lowest Edge

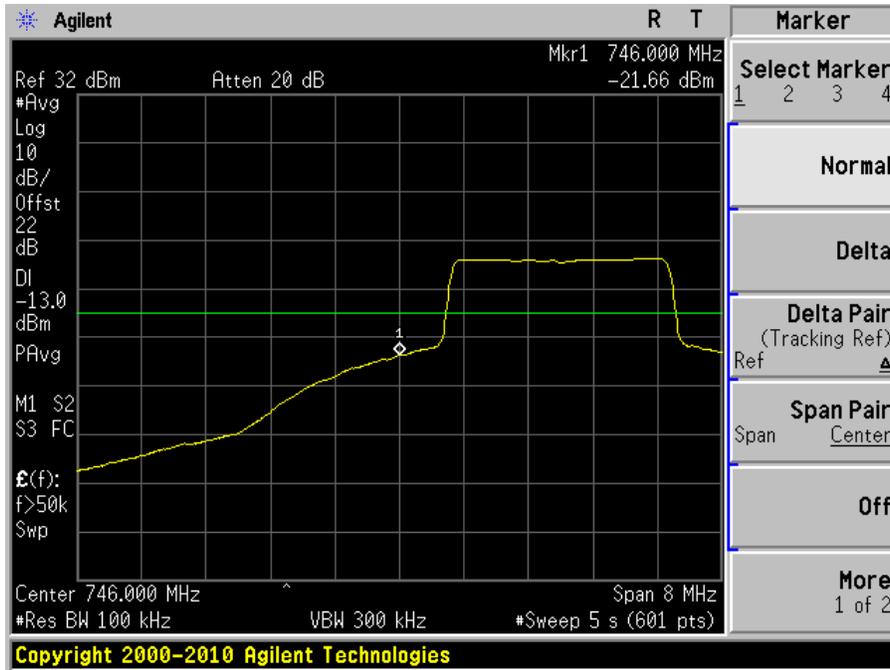


Plot 2: Highest Edge

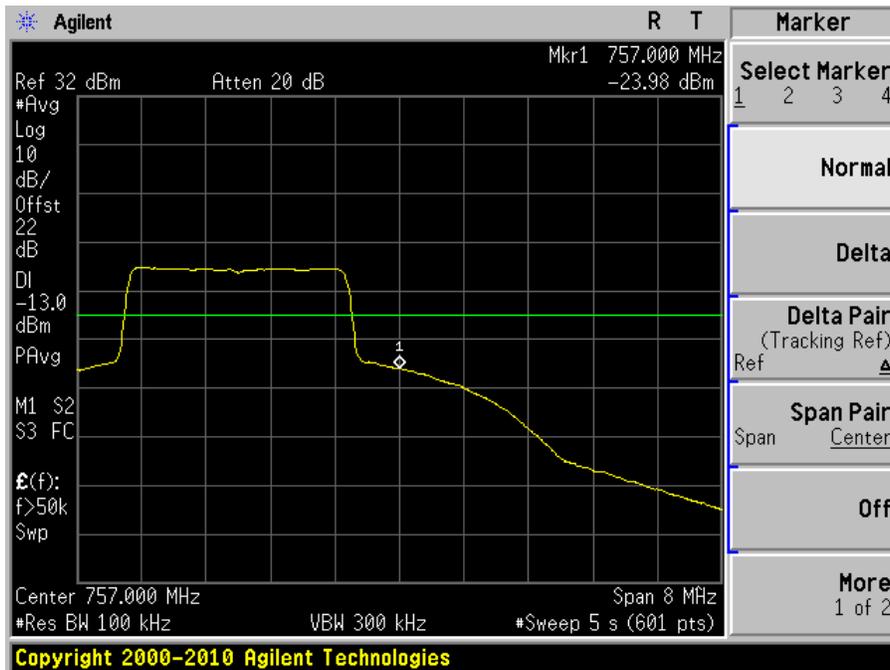


Modulation: LTE-16QAM (3 MHz):

Plot 1: Lowest Edge

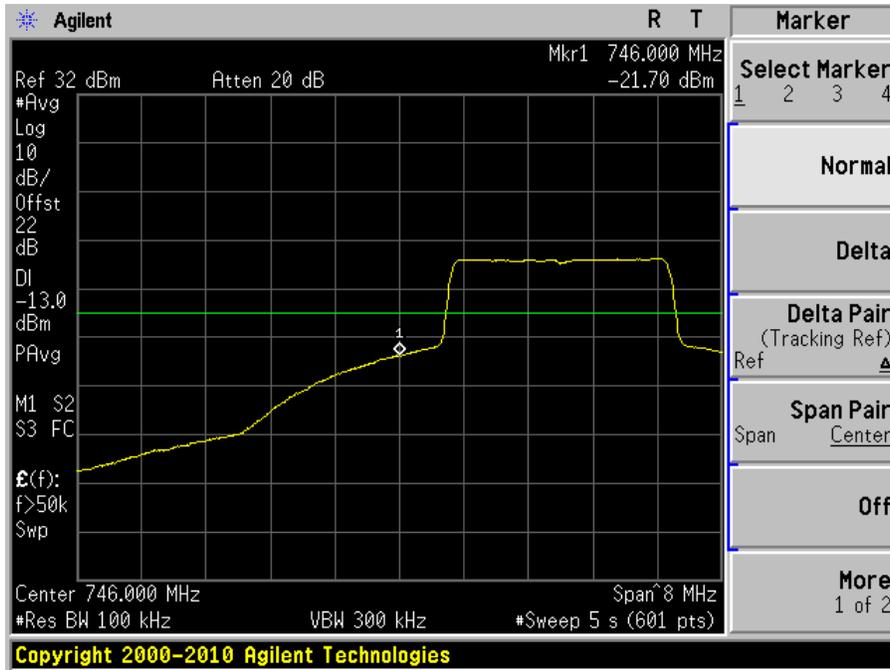


Plot 2: Highest Edge

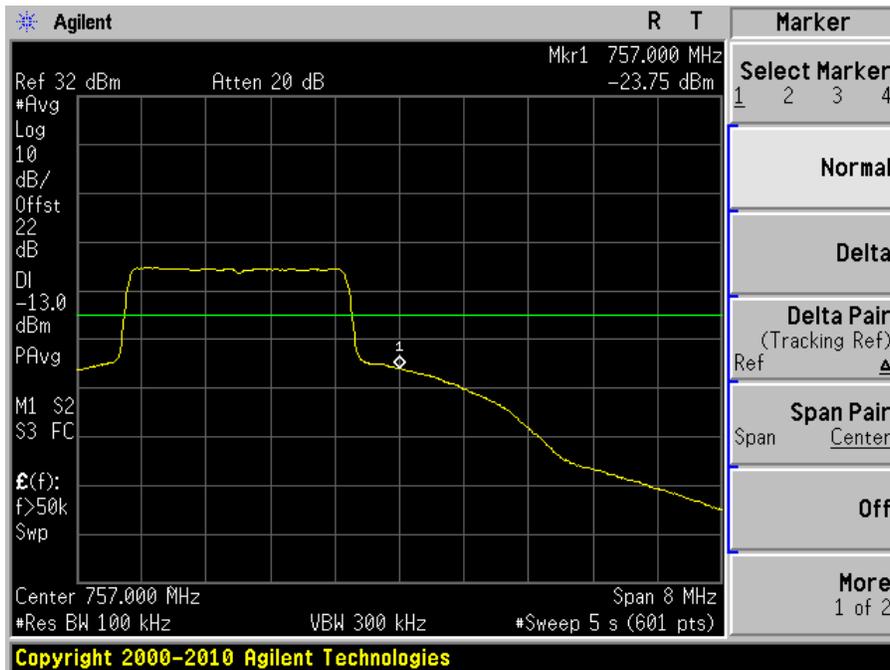


Modulation: LTE-64QAM (3 MHz):

Plot 1: Lowest Edge

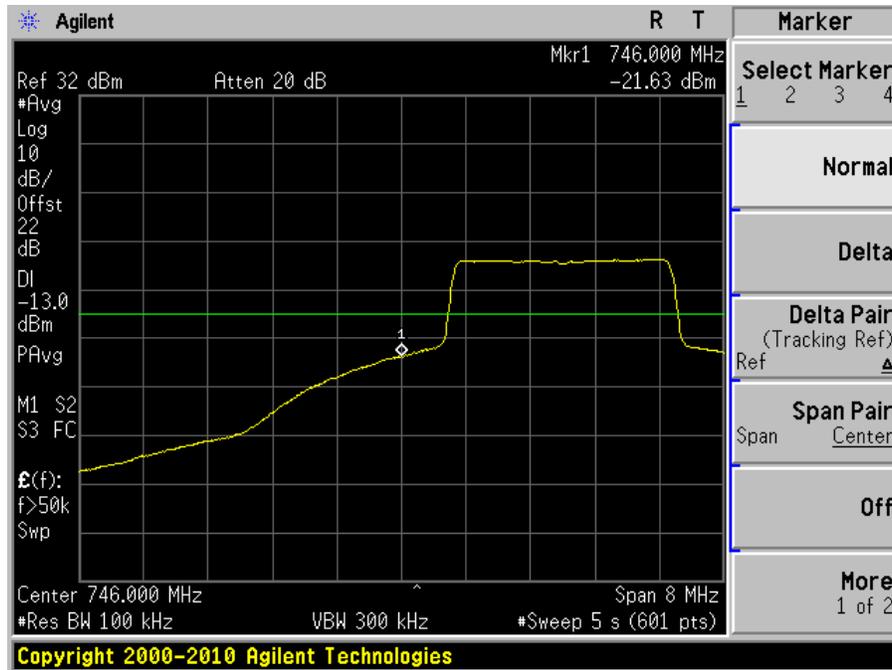


Plot 2: Highest Edge

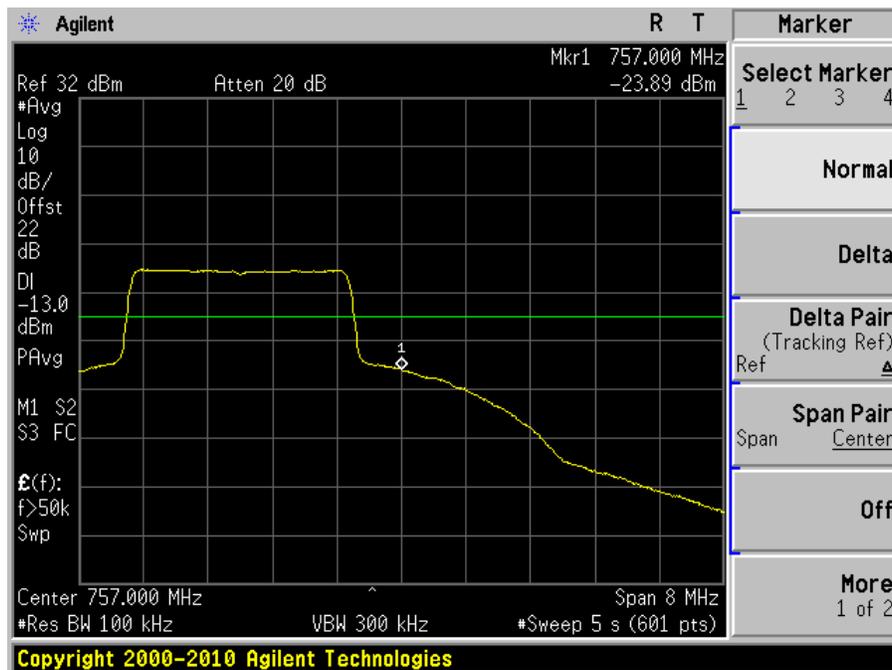


Modulation: LTE-QPSK (5 MHz):

Plot 1: Lowest Edge

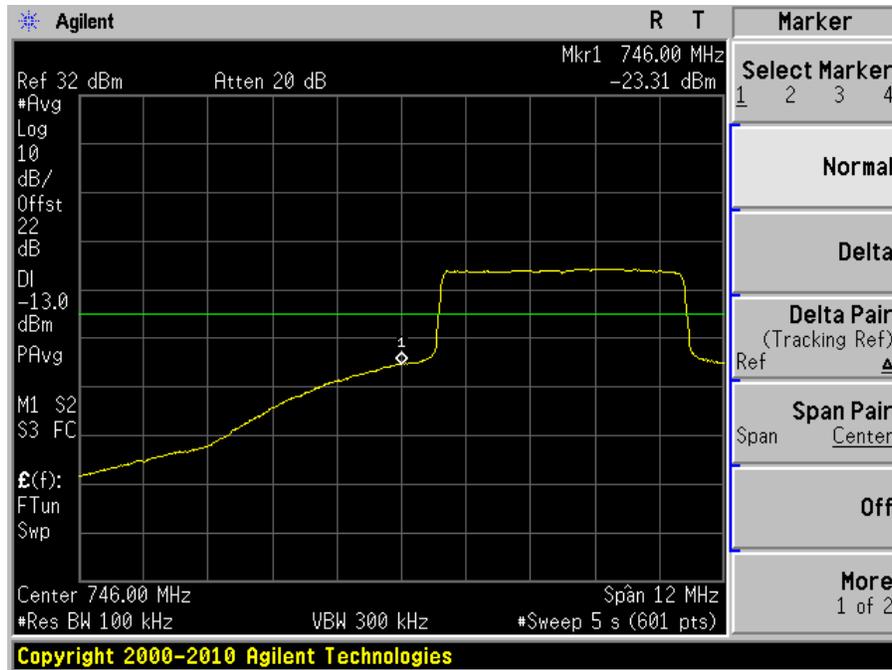


Plot 2: Highest Edge

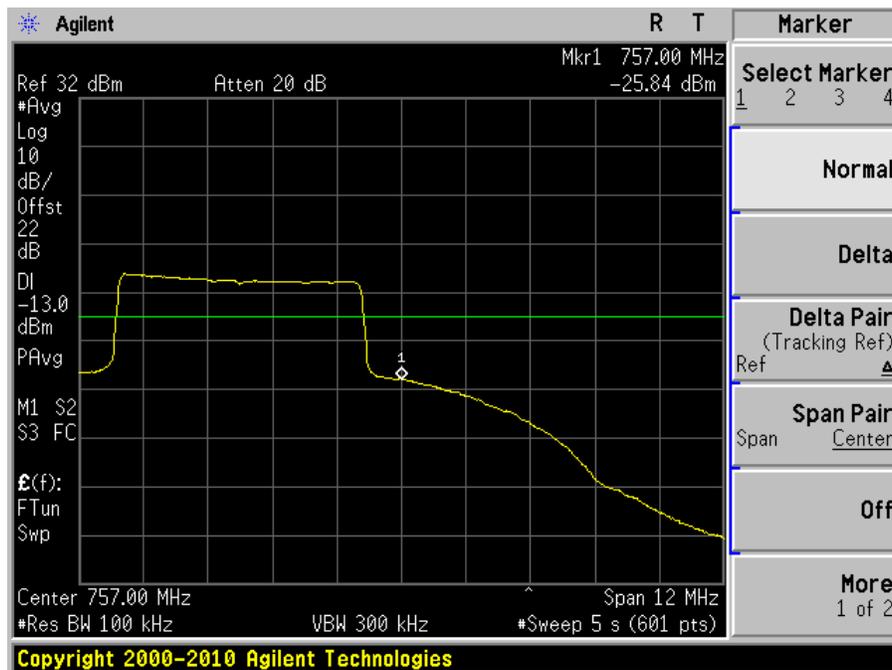


Modulation: LTE-16QAM (5 MHz):

Plot 1: Lowest Edge

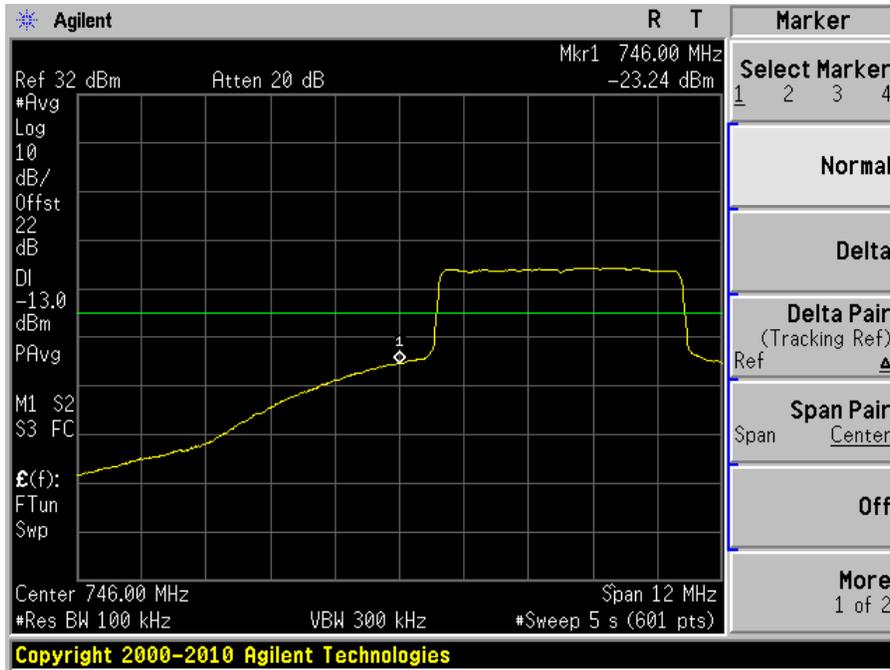


Plot 2: Highest Edge

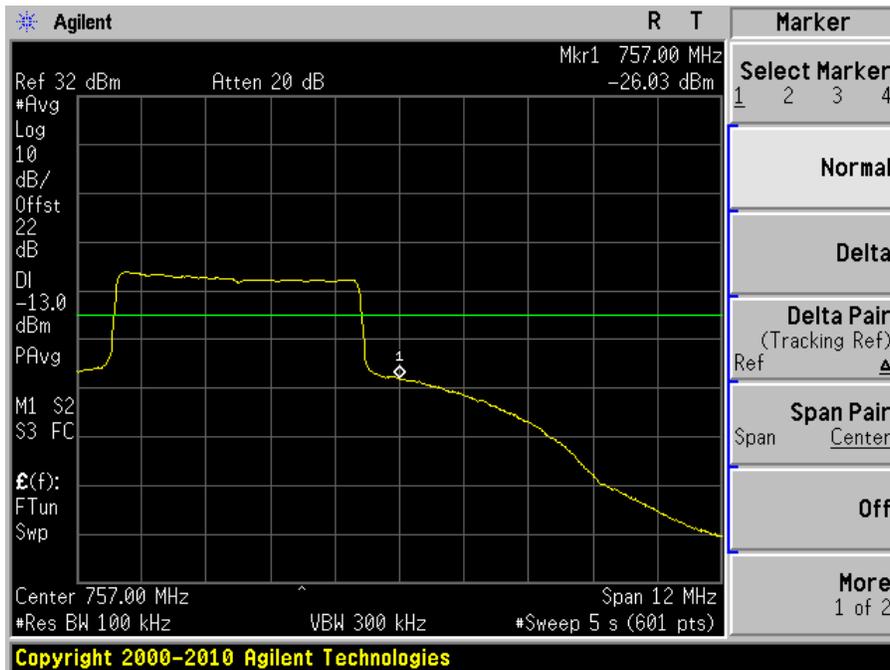


Modulation: LTE-64QAM (5 MHz):

Plot 1: Lowest Edge

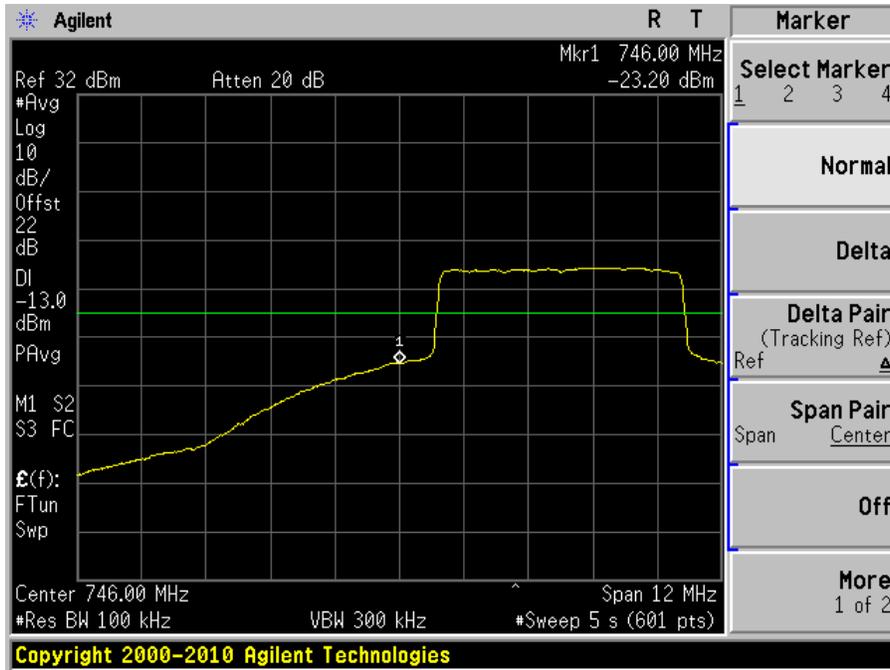


Plot 2: Highest Edge

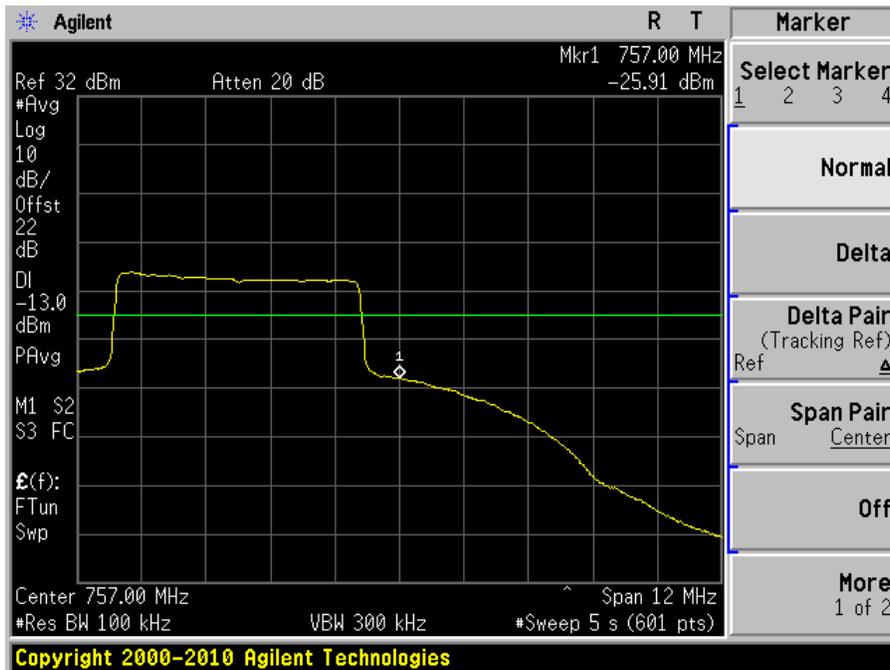


Modulation: LTE-QPSK (10 MHz):

Plot 1: Lowest Edge

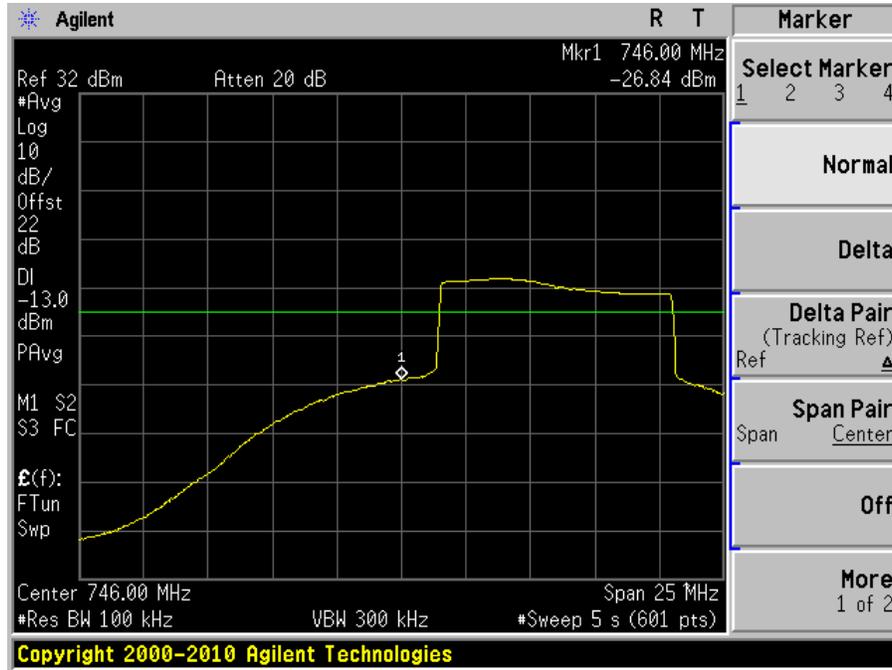


Plot 2: Highest Edge

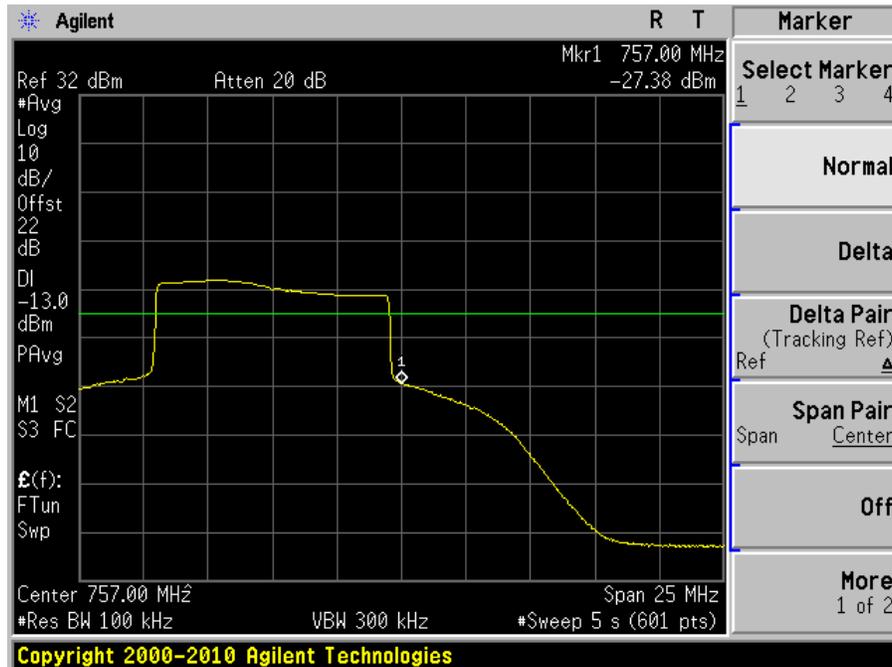


Modulation: LTE-16QAM (10 MHz):

Plot 1: Lowest Edge

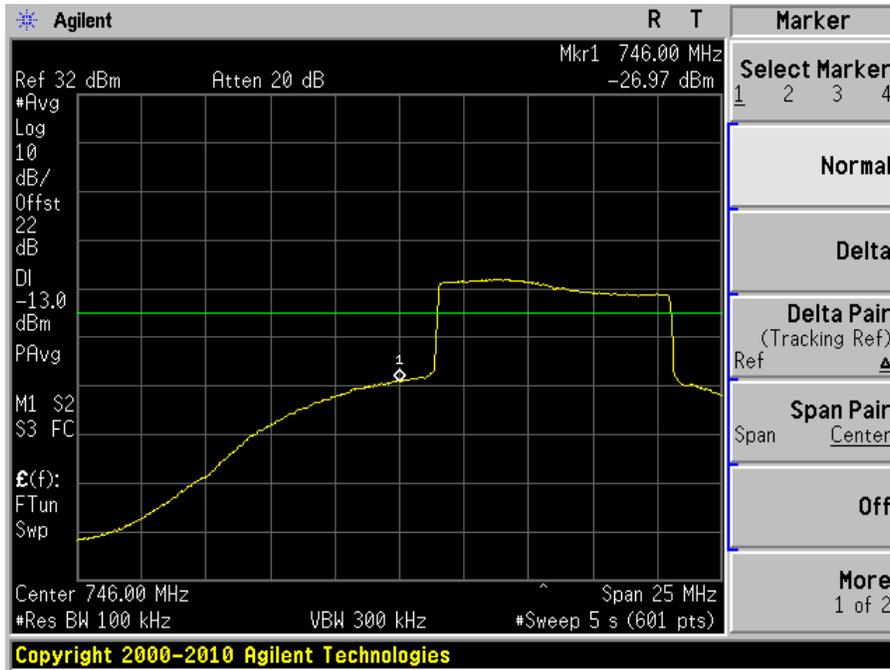


Plot 2: Highest Edge

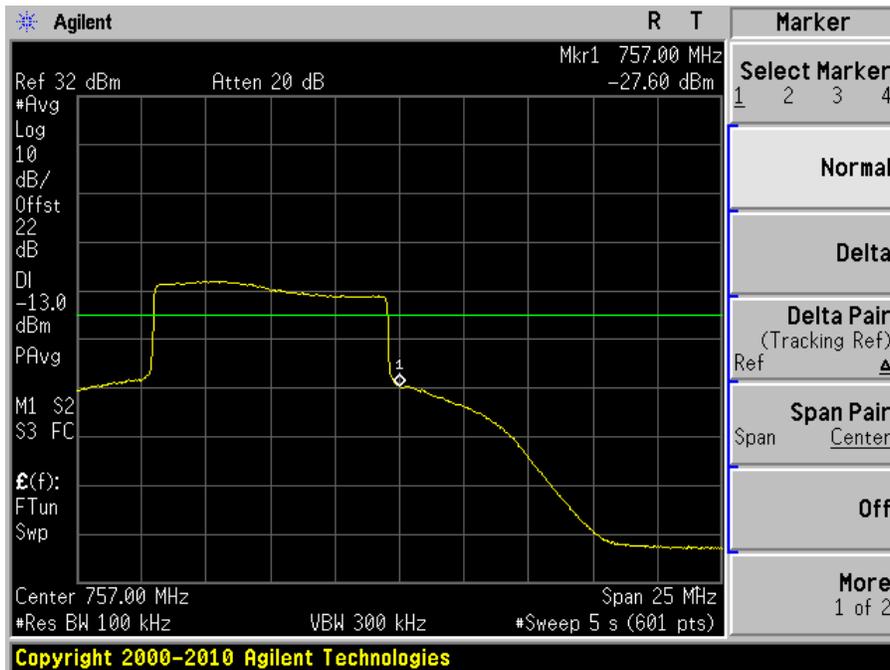

Modulation: LTE-64QAM (10 MHz):

Plot 1: Lowest Edge

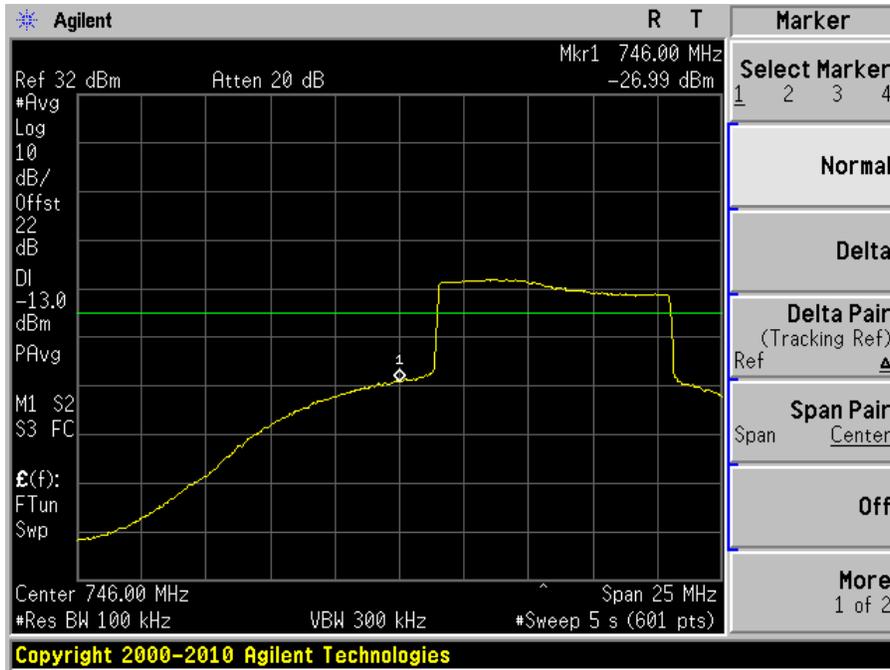


Plot 2: Highest Edge




UL: 776-787 MHz

Modulation: LTE-QPSK (1.4 MHz):

Plot 1: Lowest Edge

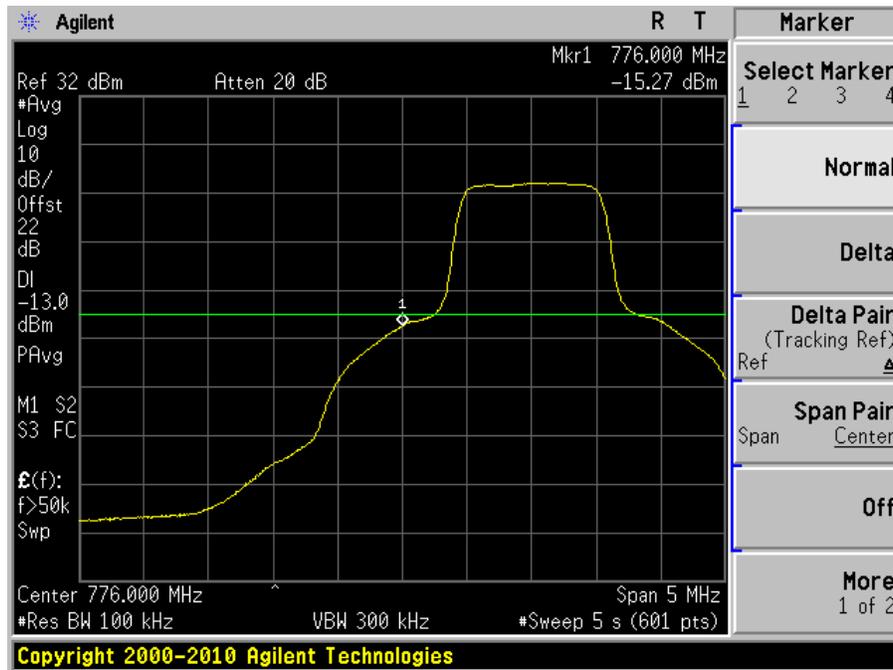


Plot 2: Highest Edge

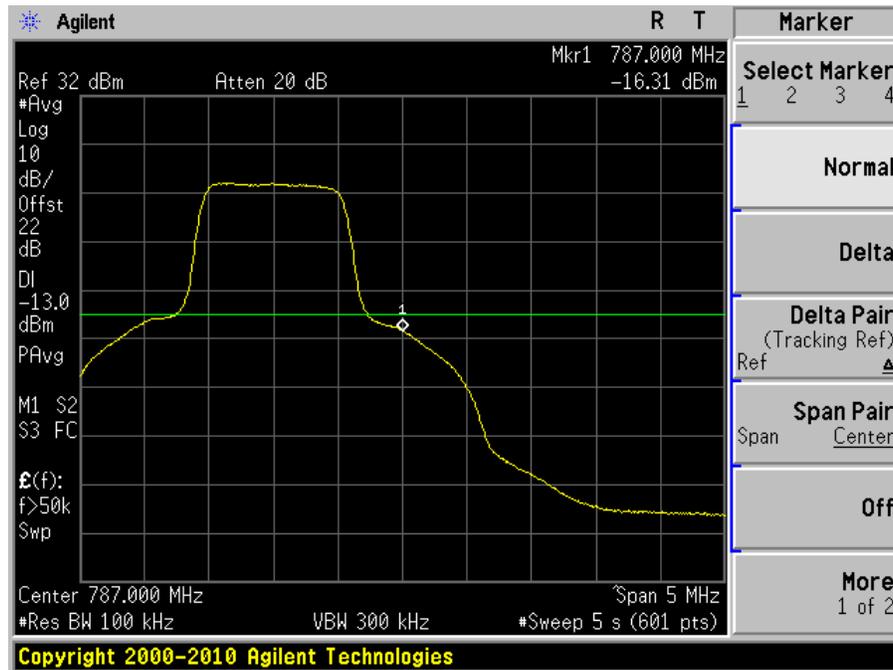


Modulation: LTE-16QAM (1.4 MHz):

Plot 1: Lowest Edge

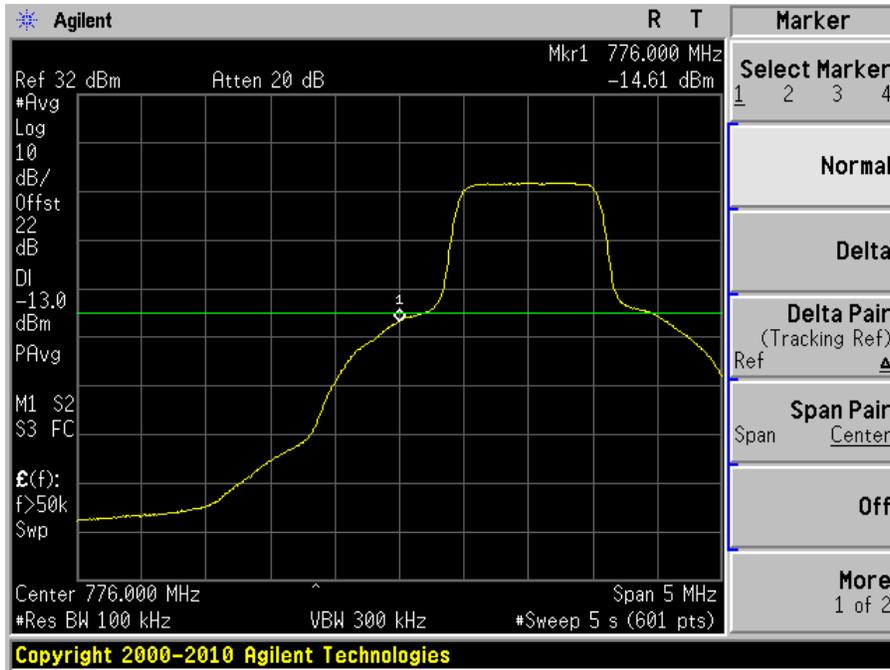


Plot 2: Highest Edge

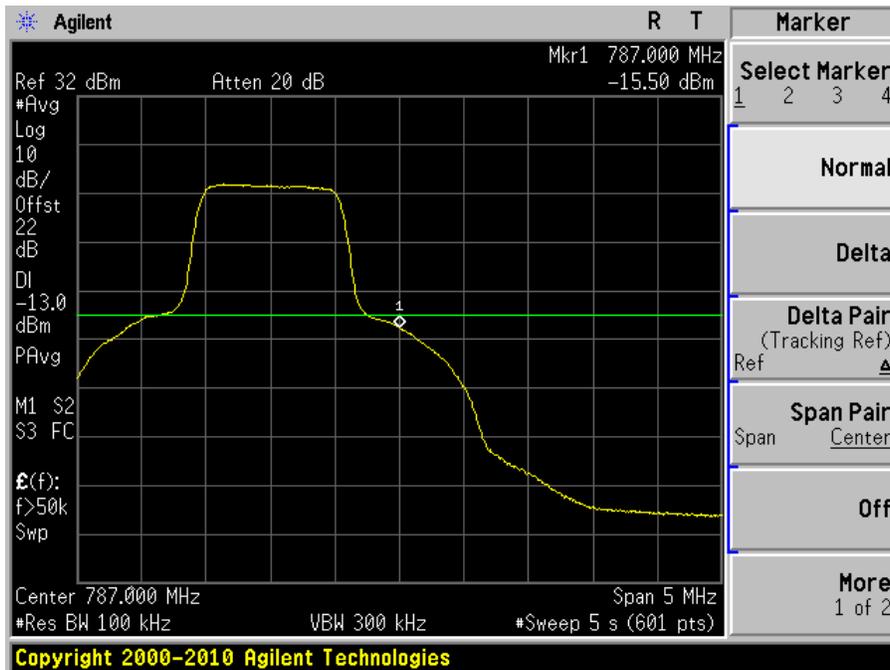


Modulation: LTE-64QAM (1.4 MHz):

Plot 1: Lowest Edge

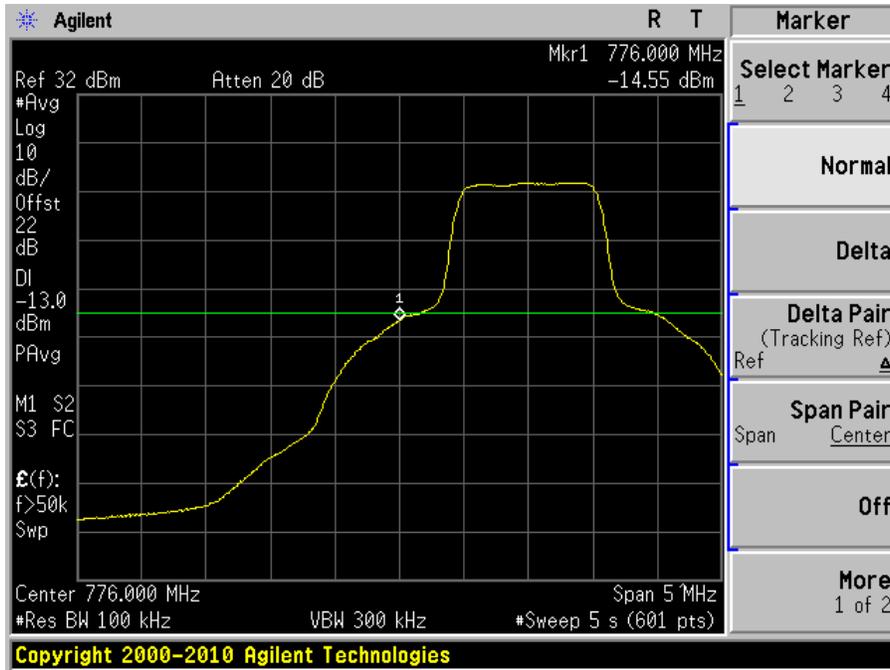


Plot 2: Highest Edge

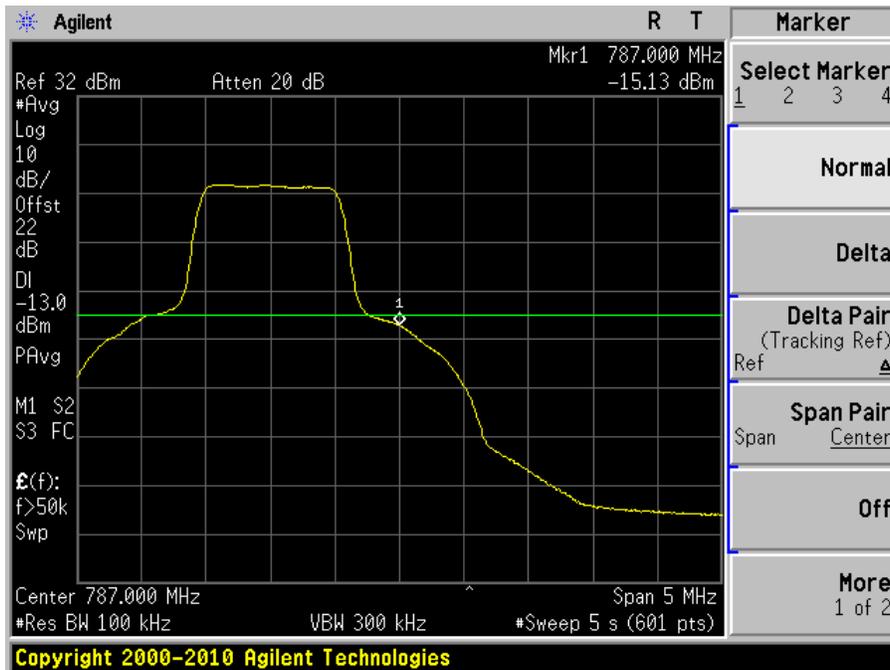


Modulation: LTE-QPSK (3 MHz):

Plot 1: Lowest Edge

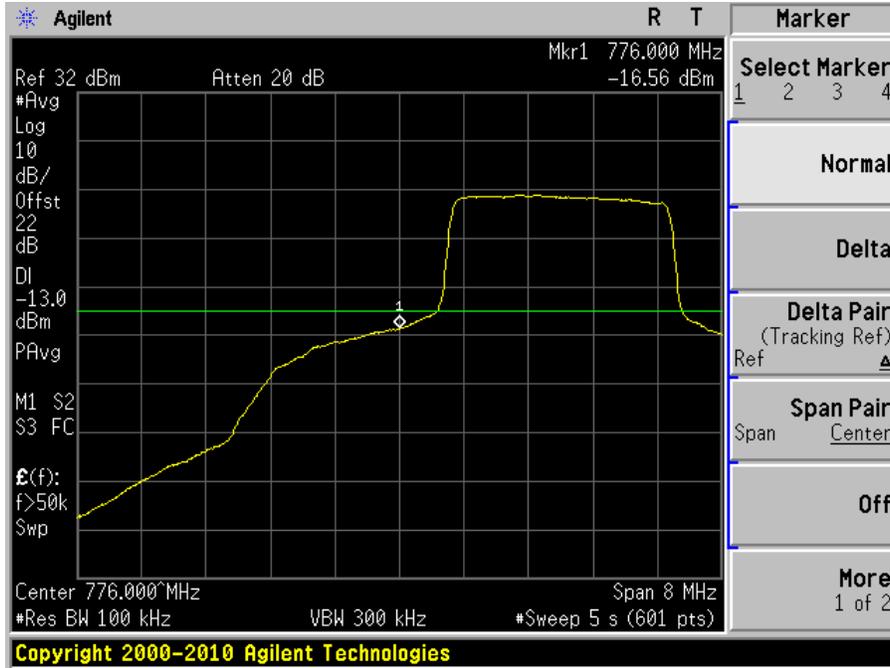


Plot 2: Highest Edge

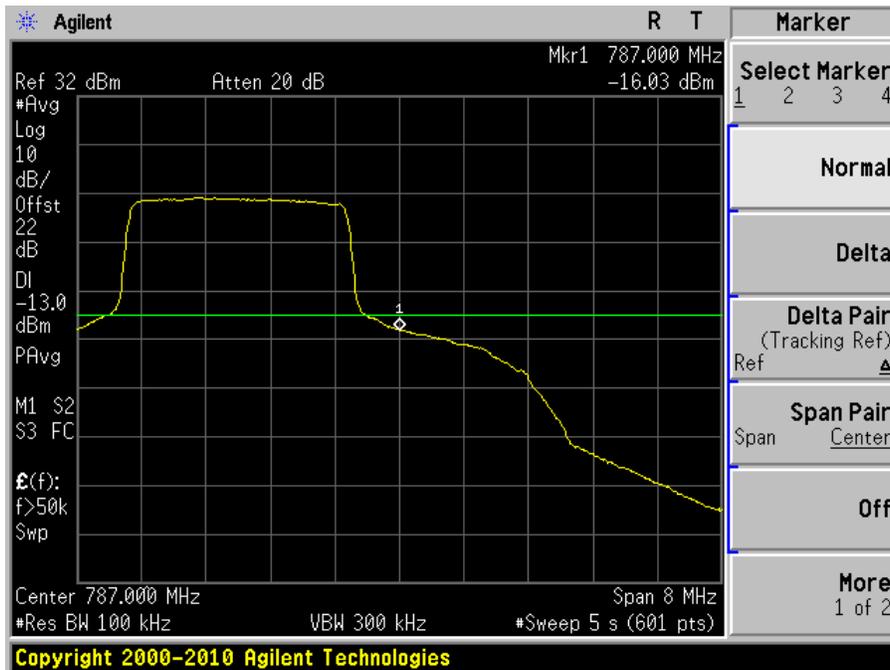


Modulation: LTE-16QAM (3 MHz):

Plot 1: Lowest Edge

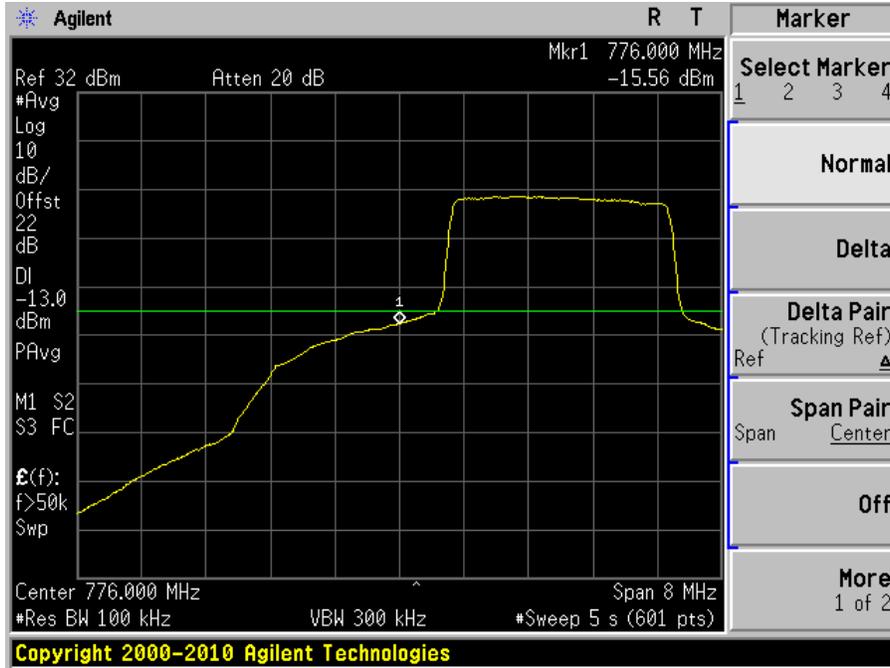


Plot 2: Highest Edge

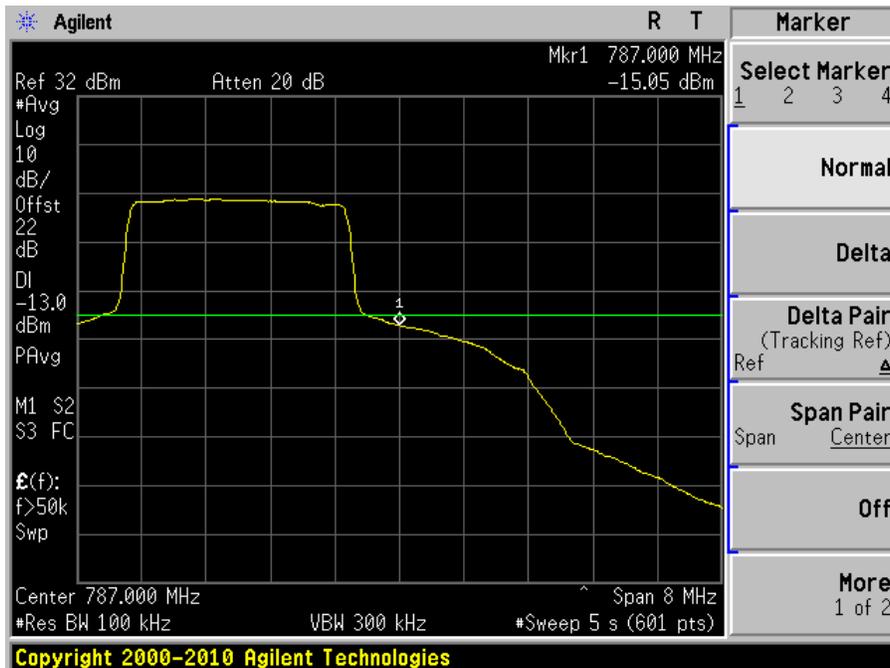


Modulation: LTE-64QAM (3 MHz):

Plot 1: Lowest Edge

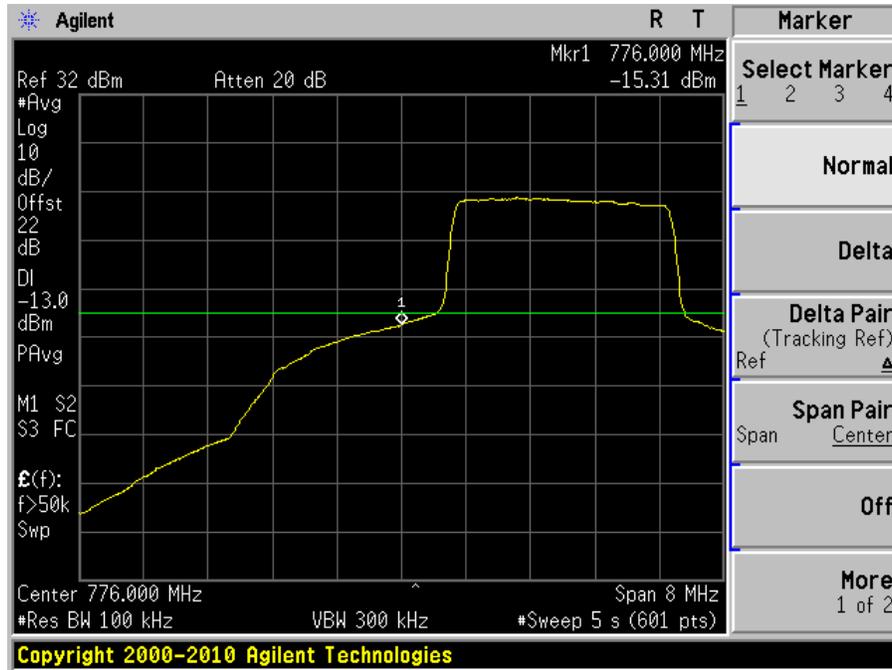


Plot 2: Highest Edge

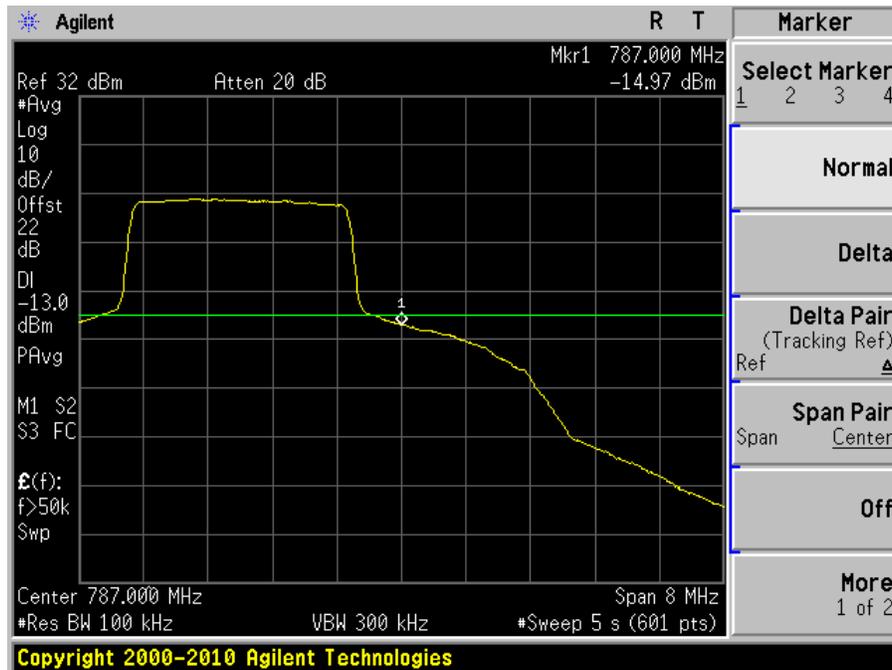


Modulation: LTE-QPSK (5 MHz):

Plot 1: Lowest Edge

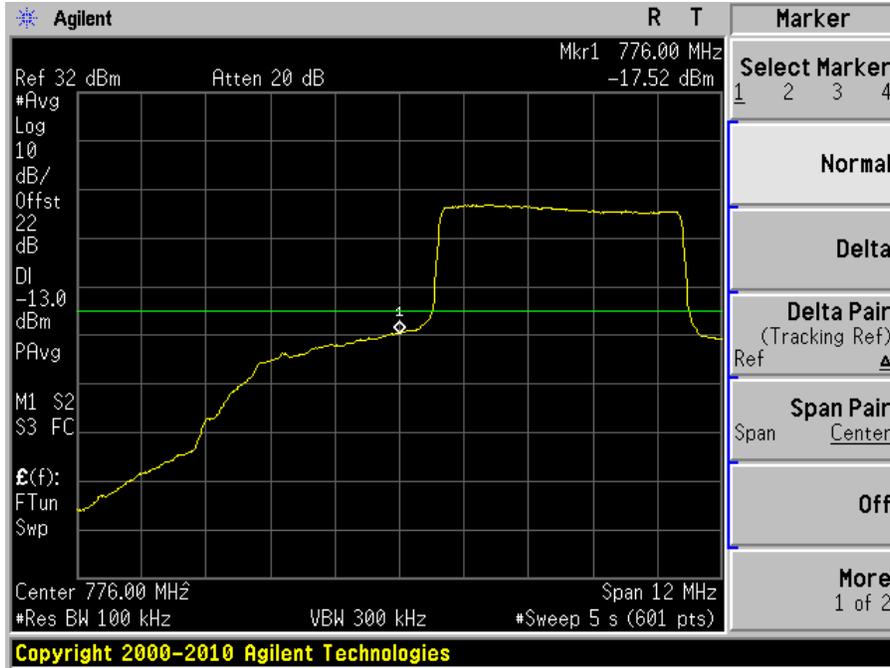


Plot 2: Highest Edge

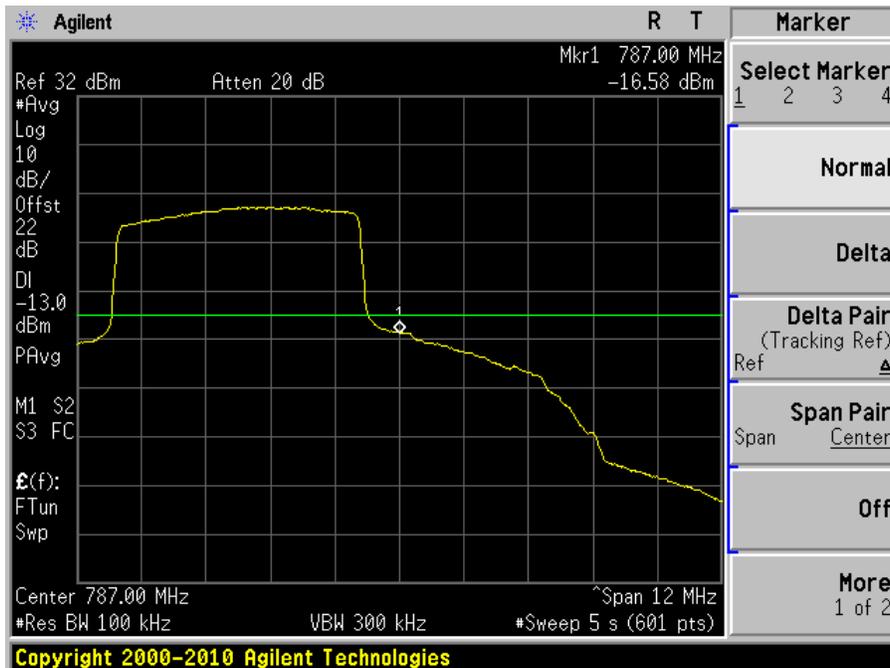


Modulation: LTE-16QAM (5 MHz):

Plot 1: Lowest Edge

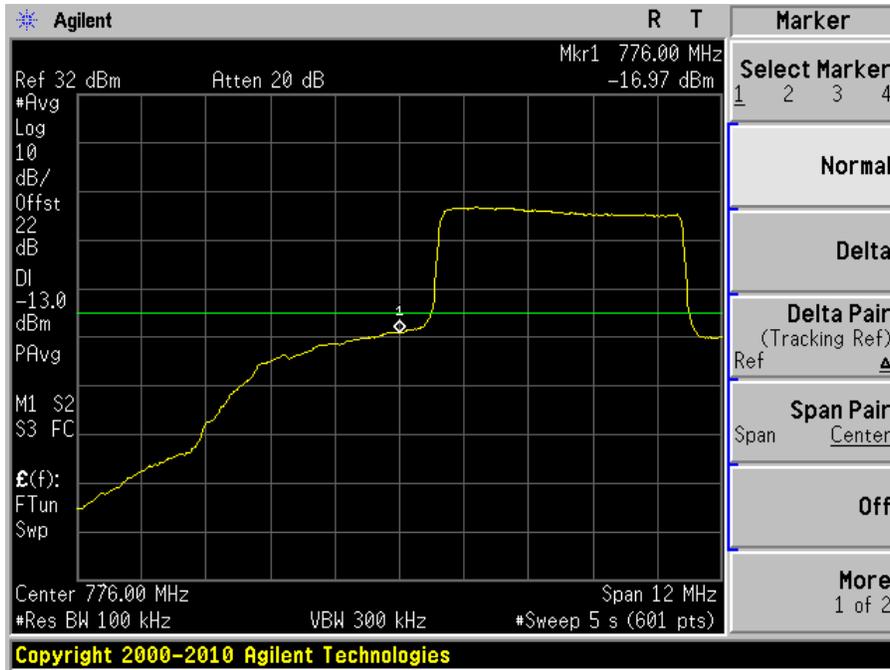


Plot 2: Highest Edge

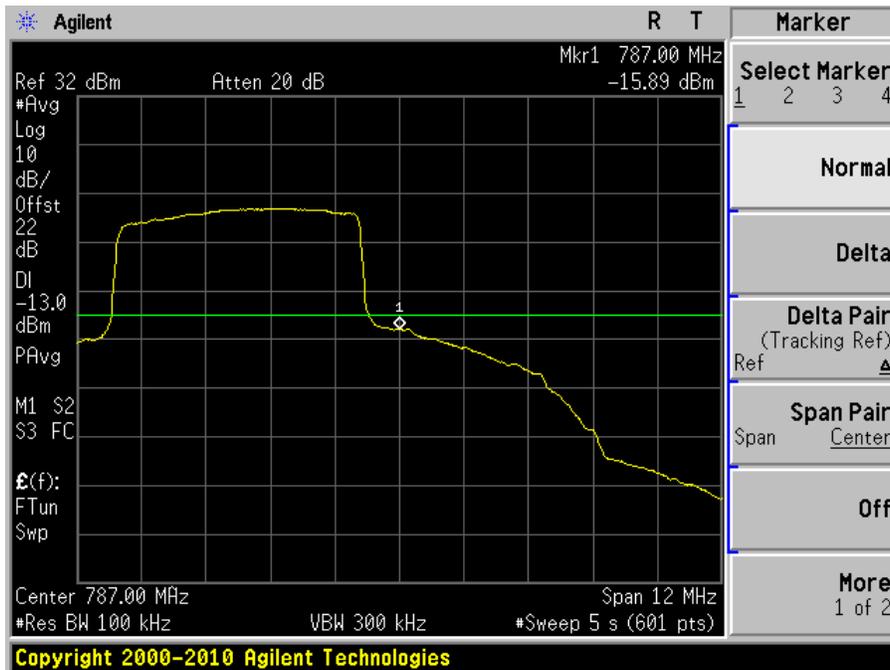


Modulation: LTE-64QAM (5 MHz):

Plot 1: Lowest Edge

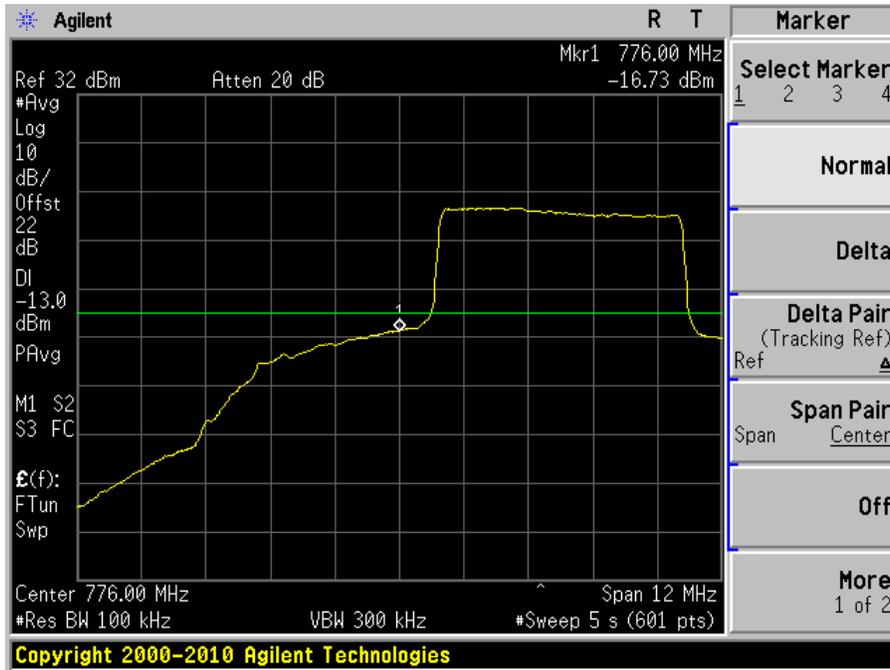


Plot 2: Highest Edge

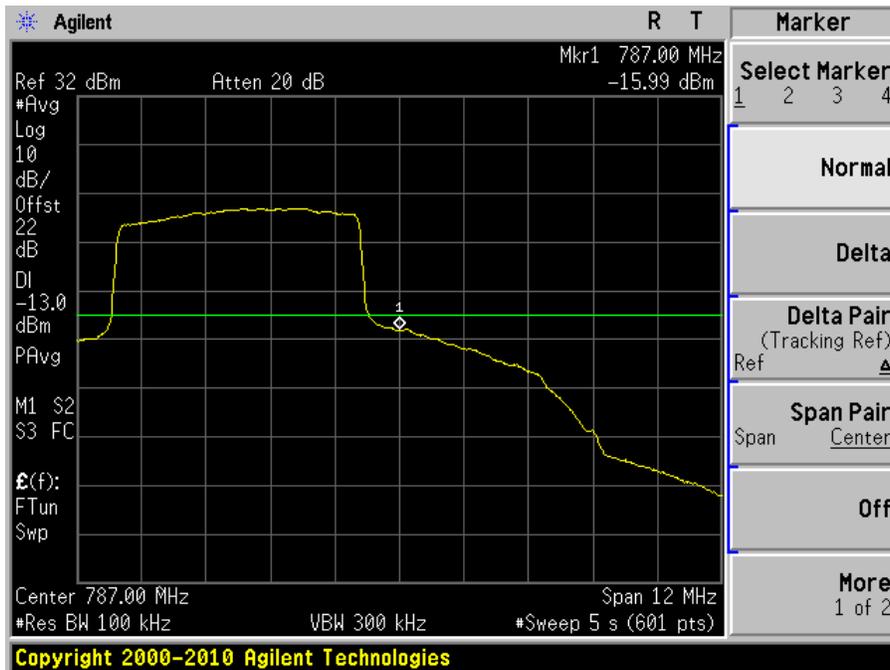


Modulation: LTE-QPSK (10 MHz):

Plot 1: Lowest Edge

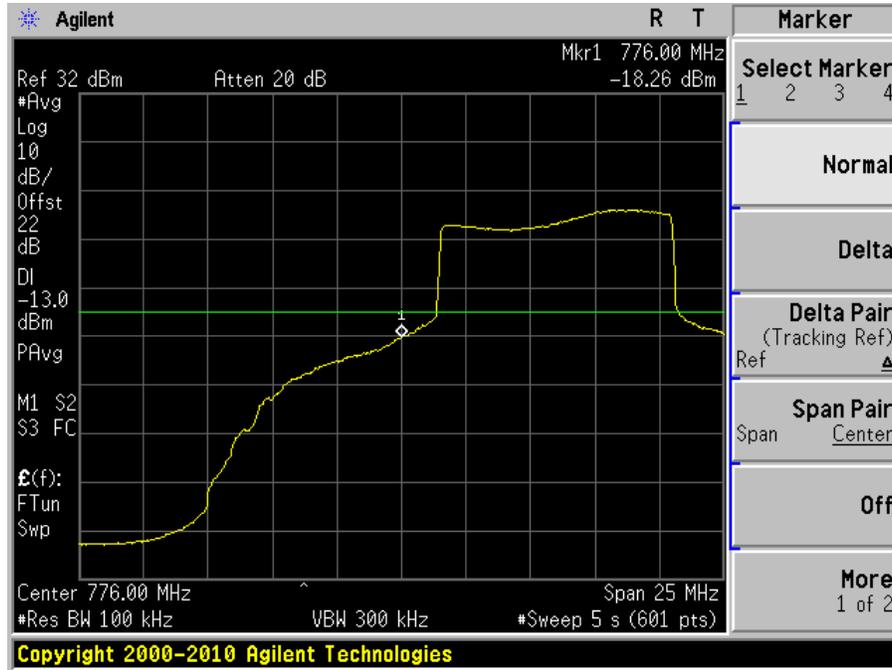


Plot 2: Highest Edge

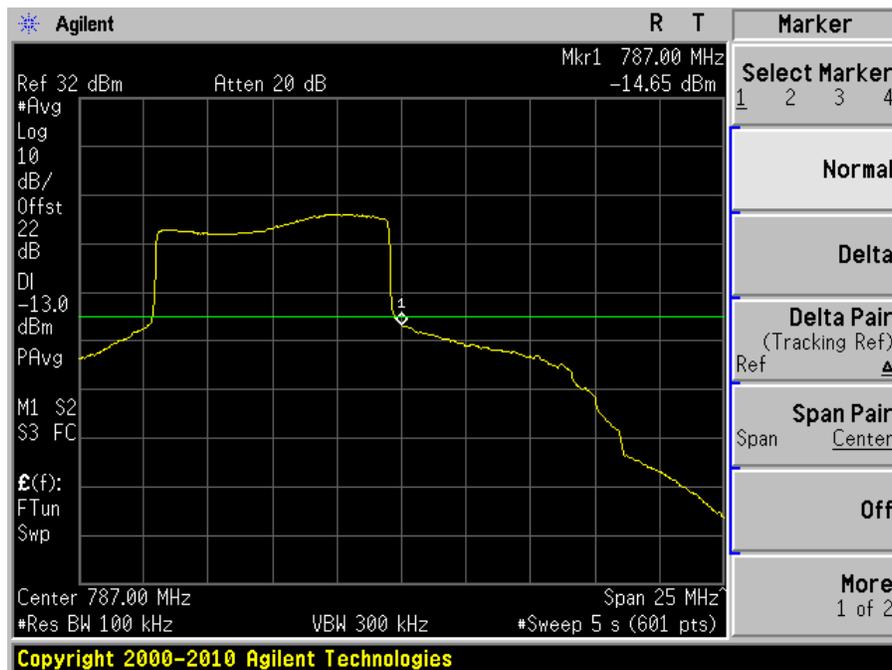


Modulation: LTE-16QAM (10 MHz):

Plot 1: Lowest Edge

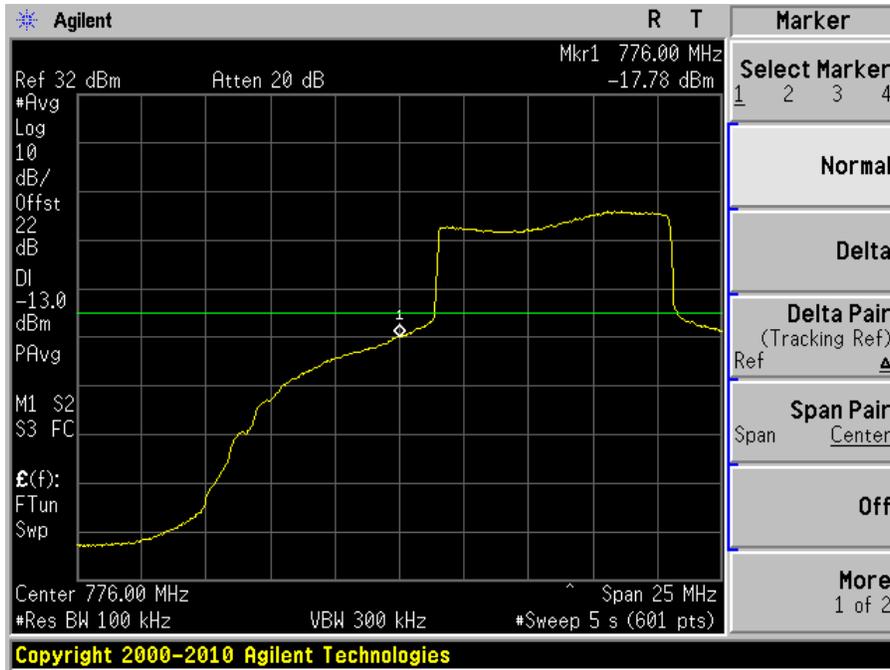


Plot 2: Highest Edge

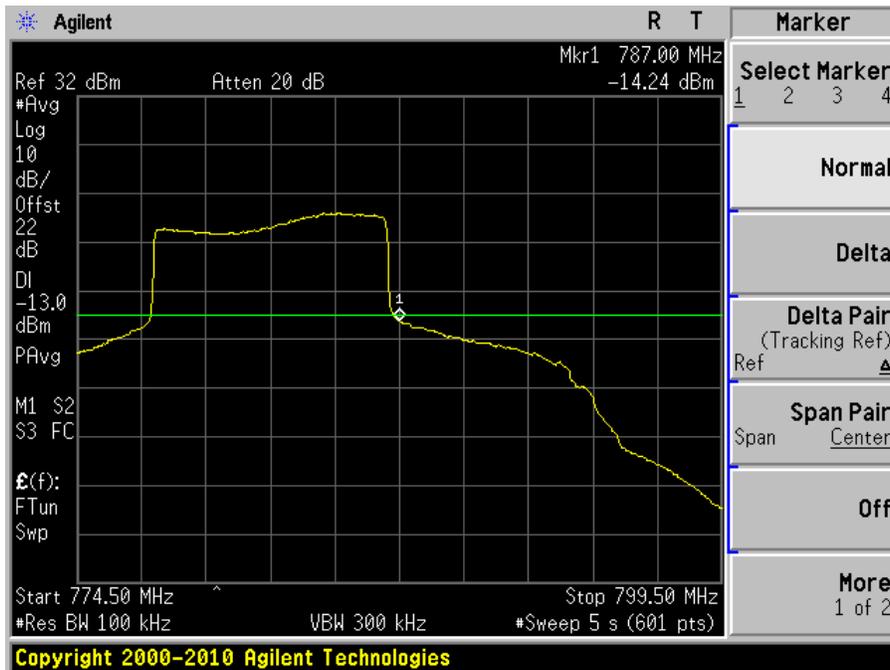


Modulation: LTE-64QAM (10 MHz):

Plot 1: Lowest Edge

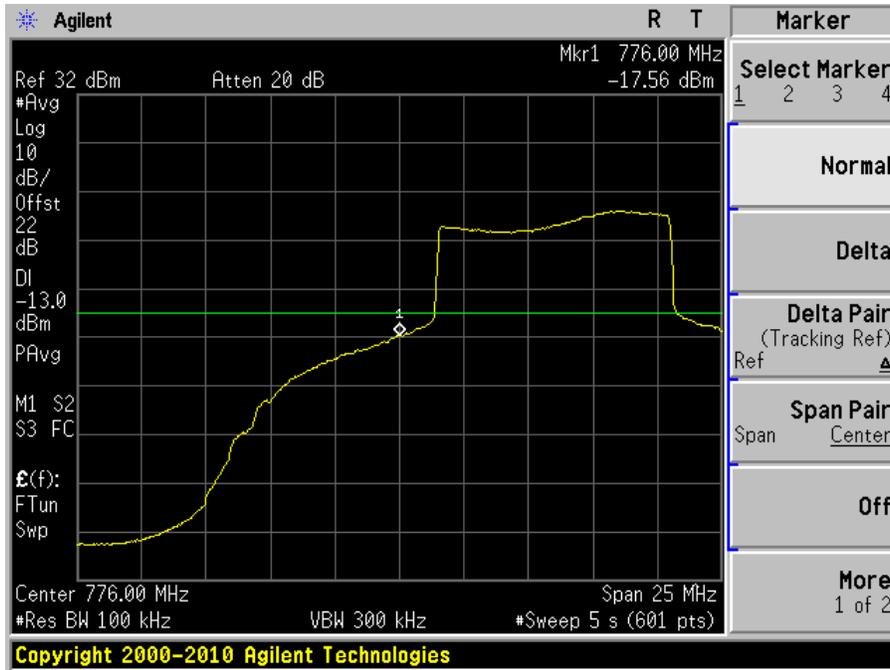

Plot 2: Highest Edge

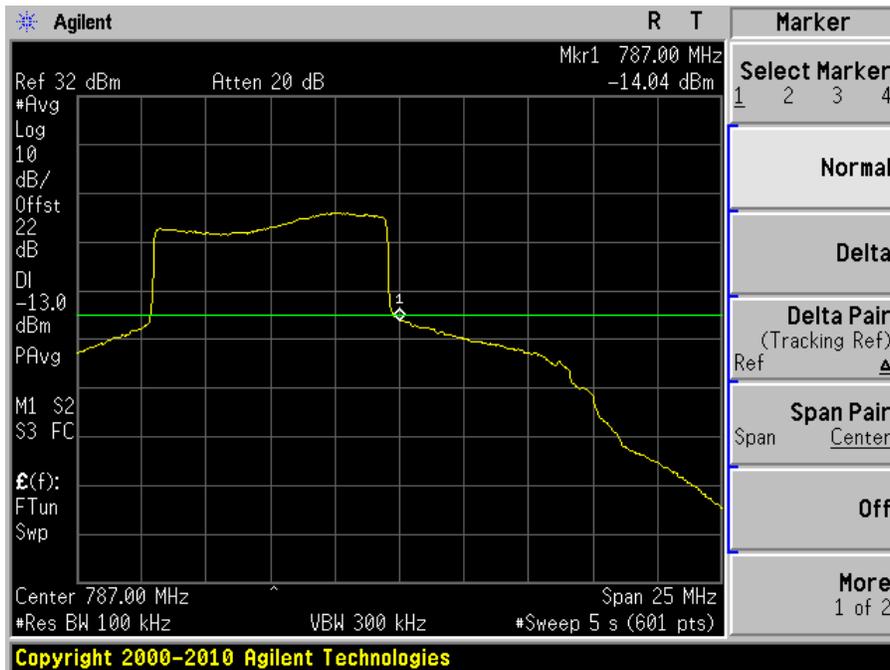

10 FCC §2.1055 & §27.54 – FREQUENCY STABILITY

10.1 Applicable Standard

According to FCC §27.54, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

10.2 Test Procedure

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from battery end point to 115 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification — the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 0.00025 % (± 2.5 ppm) of the center frequency.

10.3 Test Results

Not applicable, *EUT is a amplifier; the signal source is from the signal generator, so no frequency stability applied.*

11 FCC §1.1307(b), §27.52 & §2.1091 - RF EXPOSURE INFORMATION

11.1 Applicable Standard

According to FCC §1.1310 and §2.1091 (Mobile Devices) RF exposure is calculated.

Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	¹ (100)	30
1.34-30	824/f	2.19/f	¹ (180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

¹ = Plane-wave equivalent power density

11.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

DL: 746-757 MHz

Maximum peak output power at antenna input terminal (dBm): 11.25

Maximum peak output power at antenna input terminal (mW): 13.335

Prediction distance (cm): 25

Prediction frequency (MHz): 747

Antenna Gain, typical (dBi): 14

Maximum Antenna Gain (numeric): 25.11

Power density at predication frequency and distance (mW/cm²): 0.043

MPE limit for uncontrolled exposure at predication frequency (mW/cm²): 0.498

UL: 776-787 MHz

Maximum peak output power at antenna input terminal (dBm):	<u>28.87</u>
Maximum peak output power at antenna input terminal (mW):	<u>770.903</u>
Prediction distance (cm):	<u>60</u>
Prediction frequency (MHz):	<u>784</u>
Antenna Gain, typical (dBi):	<u>14</u>
Maximum Antenna Gain (numeric):	<u>25.11</u>
Power density at predication frequency and distance (mW/cm ²):	<u>0.428</u>
MPE limit for uncontrolled exposure at predication frequency (mW/cm ²):	<u>0.523</u>

Test Result

For downlink, the indoor antenna with 14 dBi gain should have at least 25 cm prediction distance to meet the MPE limit. For uplink, the outdoor antenna with 14 dBi gain should have at least 60 cm prediction distance to meet the MPE limit. The distance needs to be addressed in the user manual.