



FCC PART 22H, 24E

TEST AND MEASUREMENT REPORT

For

Cellphone-Mate, Inc.

48820 Kato Road, Suite 300B

Fremont, CA 94539, USA

FCC ID: RSNDUAL-60UNDER
Model: CM2000-WL-60dB

Report Type: Original Report
Product Type: Universal Building Repeater
Test Engineer: Jack Liu
Report Number: R0904133-2224
Report Date: 2009-08-20
Reviewed By: Senior RF Engineer
Prepared By: Bay Area Compliance Laboratories Corp.

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "*" ...

TABLE OF CONTENTS

1	GENERAL INFORMATION	5
1.1	PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
1.2	MECHANICAL DESCRIPTION	5
1.3	EUT PHOTO	5
1.4	OBJECTIVE.....	6
1.5	RELATED SUBMITTAL(S)/GRANT(S).....	6
1.6	TEST METHODOLOGY	6
1.7	MEASUREMENT UNCERTAINTY.....	6
1.8	TEST FACILITY.....	7
2	SYSTEM TEST CONFIGURATION	8
2.1	JUSTIFICATION	8
2.2	EUT EXERCISE SOFTWARE.....	8
2.3	EQUIPMENT MODIFICATIONS	8
2.4	POWER SUPPLY AND LINE FILTERS	8
2.5	EUT INTERNAL CONFIGURATION DETAILS.....	8
2.6	INTERFACE PORTS AND CABLING	8
3	SUMMARY OF TEST RESULTS.....	9
4	FCC §2.1046, §22.913(A) & §24.232 – RF OUTPUT POWER.....	10
4.1	APPLICABLE STANDARD	10
4.2	TEST PROCEDURE	10
4.3	ENVIRONMENTAL CONDITIONS.....	10
4.4	TEST EQUIPMENT LIST AND DETAILS	10
4.5	SUMMARY OF TEST RESULTS.....	11
5	FCC §2.1047 - MODULATION CHARACTERISTIC.....	12
5.1	APPLICABLE STANDARD	12
5.2	TEST RESULT	12
6	FCC §2.1049, §22.917 & §24.238 - OCCUPIED BANDWIDTH.....	13
6.1	APPLICABLE STANDARD	13
6.2	TEST PROCEDURE	13
6.3	ENVIRONMENTAL CONDITIONS.....	13
6.4	TEST EQUIPMENT LIST AND DETAILS	13
6.5	SUMMARY OF TEST RESULTS.....	14
7	FCC §2.1053, §22.917 & §24.238 - SPURIOUS RADIATED EMISSIONS.....	39
7.1	APPLICABLE STANDARD	39
7.2	TEST PROCEDURE	39
7.3	ENVIRONMENTAL CONDITIONS.....	39
7.4	TEST EQUIPMENT LIST AND DETAILS	40
7.5	SUMMARY OF TEST RESULTS.....	41
7.6	TEST RESULTS	42
8	FCC §2.1051, §22.917& §24.238- SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	44
8.1	APPLICABLE STANDARD	44
8.2	TEST PROCEDURE	44
8.3	ENVIRONMENTAL CONDITIONS.....	44
8.4	TEST EQUIPMENT LIST AND DETAILS	44
8.5	TEST RESULTS	44

9	FCC §22.917 & §24.238– BAND EDGE.....	91
9.1	APPLICABLE STANDARD	91
9.2	TEST PROCEDURE	91
9.3	ENVIRONMENTAL CONDITIONS.....	91
9.4	TEST EQUIPMENT LIST AND DETAILS	91
9.5	TEST RESULTS	91
10	FCC §2.1055 – FREQUENCY STABILITY.....	100
10.1	TEST RESULT	100
11	FCC §1.1307(B) (1) & §2.1091 - RF EXPOSURE	101
11.1	APPLICABLE STANDARD	101
11.2	MPE PREDICTION	101
12	EXHIBIT A - FCC ID LABELING AND WARNING STATEMENT	103
12.1	FCC ID LABEL REQUIREMENT	103
12.2	FCC ID LABEL	103
12.3	FCC LABEL LOCATION ON EUT	103
12.4	FCC WARNING STATEMENT.....	103
13	EXHIBIT B - TEST SETUP PHOTOGRAPHS.....	104
13.1	RADIATED EMISSIONS BELOW 1 GHZ - FRONT VIEW	104
13.2	RADIATED EMISSIONS BELOW 1 GHZ - REAR VIEW.....	104
13.3	RADIATED EMISSIONS ABOVE 1 GHZ - FRONT VIEW	105
13.4	RADIATED EMISSIONS ABOVE 1 GHZ - REAR VIEW	105
14	EXHIBIT C – EUT PHOTOGRAPHS.....	106
14.1	EUT - TOP VIEW.....	106
14.2	EUT - BOTTOM VIEW	106
14.3	EUT – AC/DC ADAPTER VIEW	107
14.4	EUT –COVER OFF VIEW	107
14.5	EUT – RF AMPLIFIER BOARD ASSEMBLY TOP VIEW	108
14.6	EUT – RF AMPLIFIER BOARD ASSEMBLY BOTTOM VIEW	108

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R0904133-2224	Original Report	2009-08-20

1 GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

This test and measurement report was prepared on behalf of *Cellphone-Mate Inc.* and their product, *CM2000-WL-60dB*, FCC ID: RSNDUAL-60UNDER or the "EUT" as referred to in this report. The EUT is a Universal Building Repeater with FMA type connector.

General Specifications:


- Operating Frequency: *Downlink*: 869-894 MHz and 1930-1990 MHz
Uplink: 824-849 MHz and 1850-1910 MHz
- Emission Designator: F9W, GXW
- Modulation: CDMA, GSM
- Power Source: AC/DC adaptor, Input: 110V/60Hz; Output: DC 6V

1.2 Mechanical Description

The EUT dimension is approximately 140mm (L) x 120 mm (W) x 30 mm (H) and weighs approximately 749g.

* *The test data gathered are from typical production sample, serial number: R0904133-X, provided by BACL.*

1.3 EUT Photo

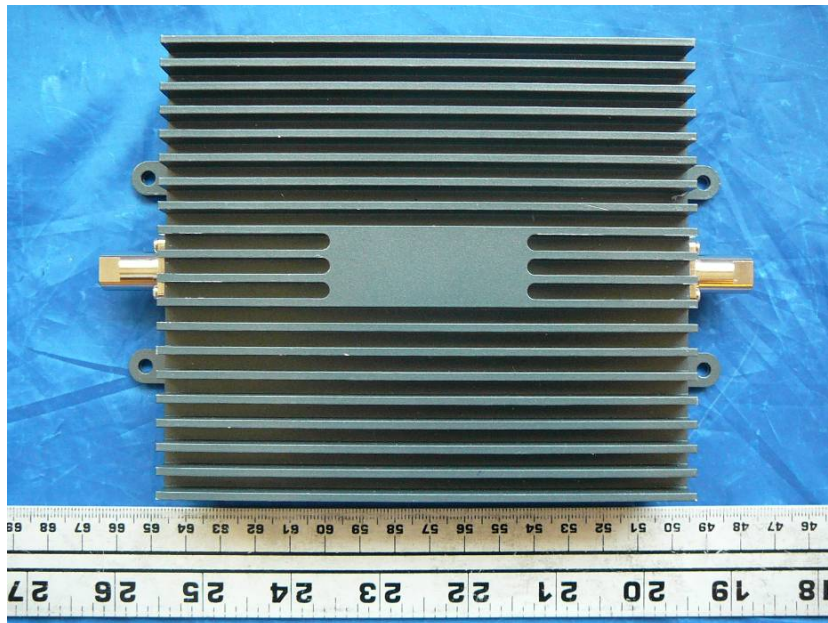

Please see additional photos in Exhibit C

1.4 Objective

This type approval report is prepared on behalf of *Cellphone-Mate, Inc.* in accordance with Part 2, Subpart J, Part 22 Subpart H, and Part 24 Subpart E, of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC rules for RF output power, modulation characteristic, occupied bandwidth, spurious emissions at antenna terminal, field strength of spurious radiation, frequency stability, band edge, and conducted and radiated margin.

1.5 Related Submittal(s)/Grant(s)

No Related Submittals

1.6 Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services
Part 24 Subpart E - PCS

Applicable Standards: TIA EIA 98-C, TIA/EIA603-C, ANSI C63.4-2003.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

1.7 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the values ranging from +2.0 dB for Conducted Emissions tests and +4.0 dB for Radiated Emissions tests are the most accurate estimates pertaining to uncertainty of EMC measurements at BACL Corp.

Detailed instrumentation measurement uncertainties can be found in BACL Corp. report QAP-018.

1.8 Test Facility

The test site used by BACL Corp. to collect radiated and conducted emissions measurement data is located at its facility in Sunnyvale, California, USA.

The test sites at BACL have been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and

December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission, Industry Canada, and Voluntary Control Council for Interference has the reports on file and is listed under FCC registration number: 90464, IC registration number: 3062A, and VCCI Registration Number: C-2463 and R-2698. The test site has been approved by the FCC, IC, and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200167-0). The current scope of accreditations can be found at <http://ts.nist.gov/ts/htdocs/210/214/scopes/2001670.htm>

2 SYSTEM TEST CONFIGURATION

2.1 Justification

The EUT was configured for testing according to TIA/EIA-603-C.

The final qualification test was performed with the EUT operating at normal mode.

2.2 EUT Exercise Software

NA, signal was sent through EUT using a signal generator, device was set to normal operating mode.

2.3 Equipment Modifications

No modifications were made to the EUT.

2.4 Power Supply and Line Filters

Manufacturer	Description	Model	Serial Number
Oriental Hero ELE. FTY.	AC/DC Switch Adapter	OH-1048A0603000U-UL	-

2.5 EUT Internal Configuration Details

Manufacturer	Description	Model	Version
Cellphone-Mate	PCB Assembly	CM2000-WL	Ver.3.1

2.6 Interface Ports and Cabling

Cable Description	Length (m)	From	To
RF cable	< 3m	Signal Generator	Input/ EUT
RF cable	< 3m	Output/ EUT	Spectrum analyzer

3 SUMMARY OF TEST RESULTS

FCC Rules	Description of Tests	Results
§ 2.1046 § 22.913 (a), § 24.232	RF Output Power	Compliant
§ 2.1047	Modulation Characteristics	N/A*
§ 2.1049, § 22.905 § 22.917, § 24.238	Occupied Bandwidth / Out of Band Emissions	Compliant
§ 2.1053 § 22.917, § 24.238	Spurious Radiated Emissions	Compliant
§ 2.1051 § 22.917, § 24.238	Spurious Emissions at Antenna Terminals	Compliant
§ 22.917, § 24.238	Band Edge	Compliant
§ 2.1055 § 22.355, § 24.235	Frequency Stability	N/A**
§2.1091	RF Exposure	Compliant

Note: *According to FCC § 2.1047(d) and part 22H, 24\$, there is no specific requirement for digital modulation and no oscillator circuit, therefore modulation characteristic is not presented.

** There is no oscillator circuit in the EUT, therefore there is no frequency stability measurement required.

4 FCC §2.1046, §22.913(a) & §24.232 – RF OUTPUT POWER

4.1 Applicable Standard

According to §22.913 (a), the maximum effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts.

According to §24.232 , Mobile/portable stations are limited to 2 watts EIRP peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

4.2 Test Procedure

Conducted:

The RF output of the transmitter was connected to the signal generator and the spectrum analyzer through sufficient attenuation.

4.3 Environmental Conditions

Temperature:	18~23 °C
Relative Humidity:	30~42 %
ATM Pressure:	101.1~102.1kPa

* The testing was performed by Jack Liu on 2009-8-03 ~ 2009-8-10

4.4 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
Rohde & Schwarz	Generator, Signal	SMIQ03	849192/0085	2008-10-14
Agilent	Analyzer, Spectrum	E4440A	US45303156	2009-03-25

* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

4.5 Summary of Test Results

Maximum Output Power – Modulated Signal

Mode		Channel	Frequency (MHz)	Output Power (dBm)	Output Power (Watt)	Limit (Watt)
GSM	850 MHz Uplink	Low	824.2	23.90	0.245	500
		Middle	836.6	22.61	0.182	500
		High	848.8	21.09	0.129	500
	850 MHz Downlink	Low	869.2	12.70	0.019	500
		Middle	881.6	14.93	0.031	500
		High	893.8	13.36	0.022	500
	1900 MHz Uplink	Low	1850.2	19.60	0.091	2
		Middle	1880.0	19.43	0.088	2
		High	1909.8	19.31	0.085	2
	1900 MHz Downlink	Low	1930.2	8.23	0.007	2
		Middle	1960.0	11.54	0.014	2
		High	1989.8	9.36	0.009	2

Mode		Channel	Frequency (MHz)	Output Power (dBm)	Output Power (Watt)	Limit (Watt)
CDMA	850 MHz Uplink	Low	824.73	17.39	0.055	500
		Middle	836.40	17.28	0.053	500
		High	848.19	17.29	0.054	500
	850 MHz Downlink	Low	869.73	7.71	0.006	500
		Middle	881.40	8.30	0.007	500
		High	893.19	7.95	0.006	500
	1900 MHz Uplink	Low	1851.25	10.83	0.012	2
		Middle	1880.00	13.05	0.020	2
		High	1908.75	10.30	0.011	2
	1900 MHz Downlink	Low	1931.25	5.50	0.004	2
		Middle	1960.00	5.78	0.004	2
		High	1988.75	5.62	0.004	2

5 FCC §2.1047 - MODULATION CHARACTERISTIC

5.1 Applicable Standard

According to FCC § 2.1047(d) and part 22H, there is no specific requirement for digital modulation and no oscillator circuit, therefore modulation characteristic is not presented.

5.2 Test Result

N/A

6 FCC §2.1049, §22.917 & §24.238 - OCCUPIED BANDWIDTH

6.1 Applicable Standard

Requirements: CFR 47, Section 2.1049, Section 22.917 and Section 24.238.

6.2 Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 30 kHz (Cellular/PCS) and the 26 dB & 99% bandwidth was recorded.

6.3 Environmental Conditions

Temperature:	18~23 °C
Relative Humidity:	30~42 %
ATM Pressure:	101.1~102.1kPa

* The testing was performed by Jack Liu on 2009-8-03 ~ 2009-8-10

6.4 Test Equipment List and Details

Manufacturers	Descriptions	Models	Serial Numbers	Calibration Date
Agilent	Spectrum Analyzer	E4440A	MY44303352	2009-04-28
Rohde & Schwarz	Generator, Signal	SMIQ03	849192/0085	2008-10-14
HP	Generator, Signal	8648C	3426M00143	2009-02-25

* **Statement of Traceability:** BA CL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

6.5 Summary of Test Results

Mode		Channel	Frequency (MHz)	Emission Bandwidth 26 dB (kHz)	Emission Bandwidth 99% (kHz)
GSM	850 MHz Uplink	Low	824.20	309.591	245.4752
		Middle	836.60	310.035	245.1605
		High	848.80	311.188	244.7253
	850 MHz Downlink	Low	869.20	312.671	242.5889
		Middle	881.60	311.287	243.6970
		High	893.80	314.092	246.5341
	1900 MHz Uplink	Low	1850.20	313.862	245.4640
		Middle	1880.00	314.749	245.3173
		High	1909.80	314.432	242.0744
	1900 MHz Downlink	Low	1930.20	315.583	244.4468
		Middle	1960.00	314.367	242.3668
		High	1989.80	312.195	245.3881


Mode		Channel	Frequency (MHz)	Emission Bandwidth 26 dB (MHz)	Emission Bandwidth 99% (MHz)
CDMA	850 MHz Uplink	Low	824.73	1.476	1.2781
		Middle	836.40	1.697	1.2779
		High	848.19	1.452	1.2761
	850 MHz Downlink	Low	869.73	1.444	1.2750
		Middle	881.40	1.728	1.2797
		High	893.19	1.671	1.2750
	1900 MHz Uplink	Low	1851.25	1.842	1.2858
		Middle	1880.00	1.996	1.2937
		High	1908.75	1.918	1.2928
	1900 MHz Downlink	Low	1931.25	1.594	1.2773
		Middle	1960.00	1.447	1.2717
		High	1988.75	1.577	1.2717

Please refer to the following plots.


GSM 850 MHz Band (Uplink)

Low Channel (824.2 MHz)

Input

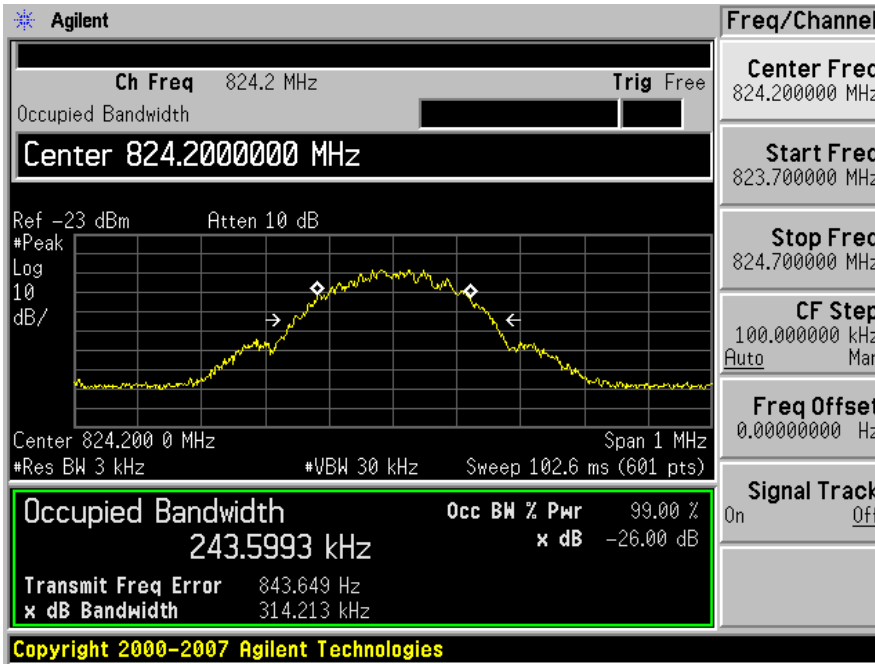


Output

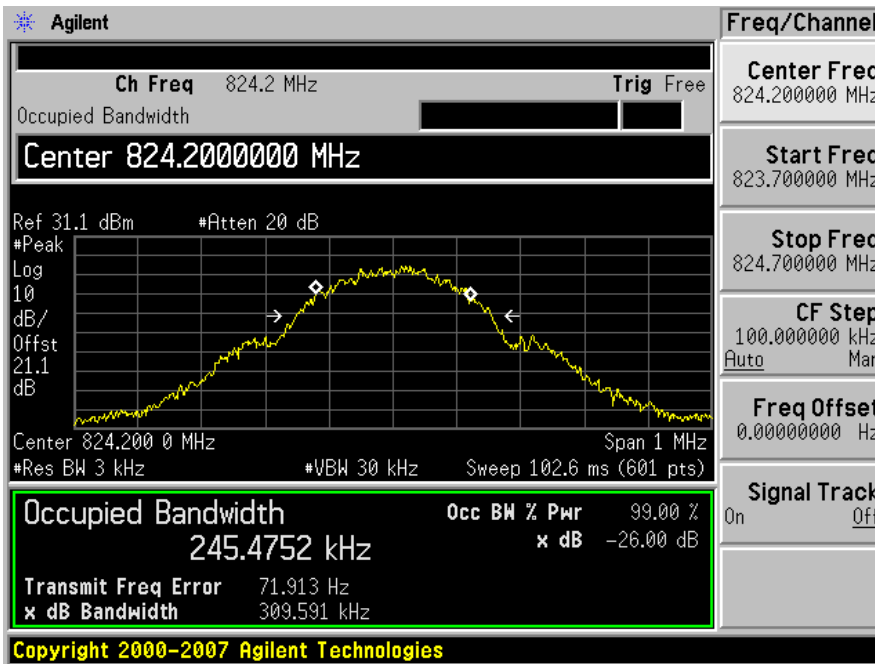


Middle Channel (836.6 MHz)

Input

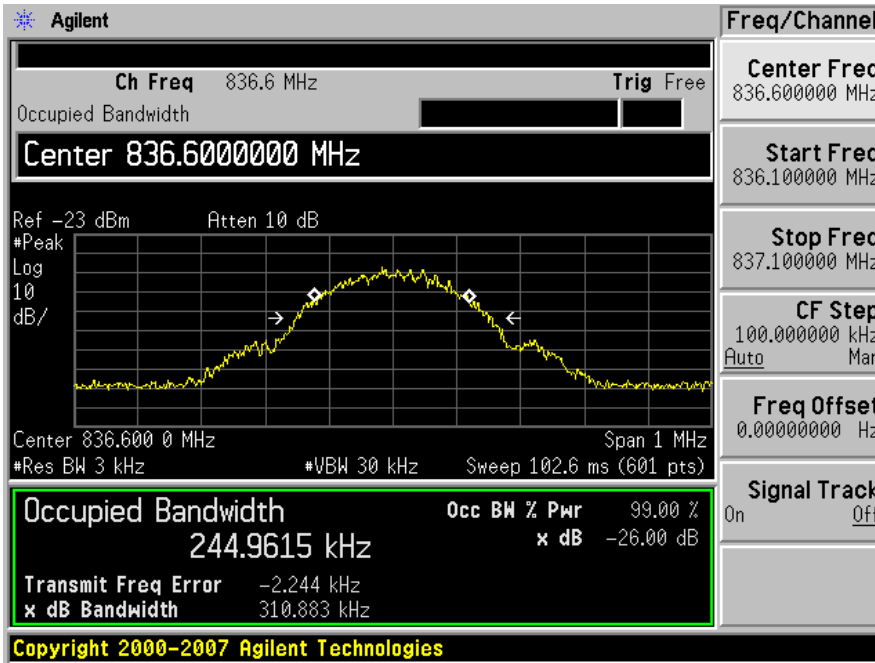

Output

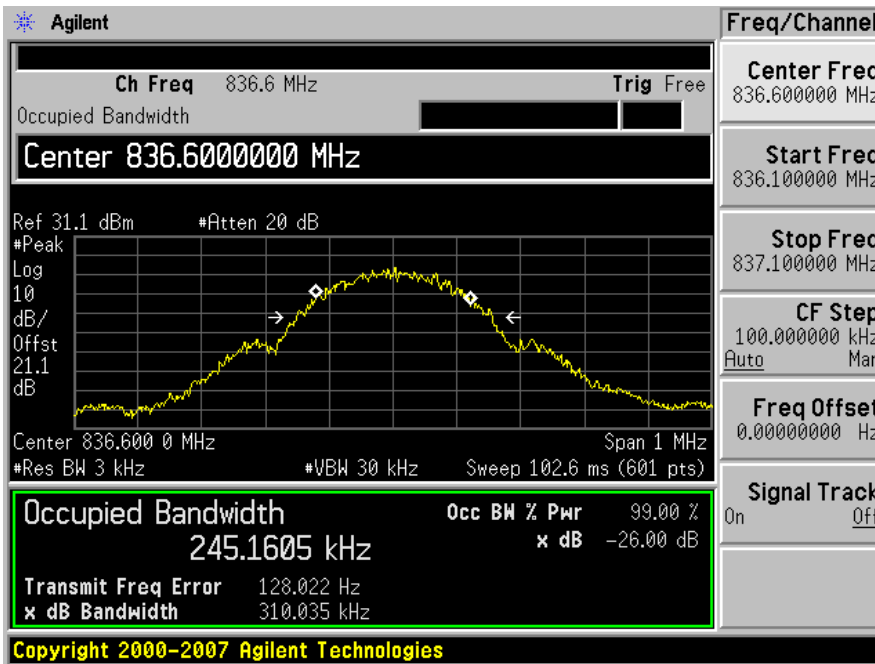


High Channel (848.8 MHz)

Input




Output

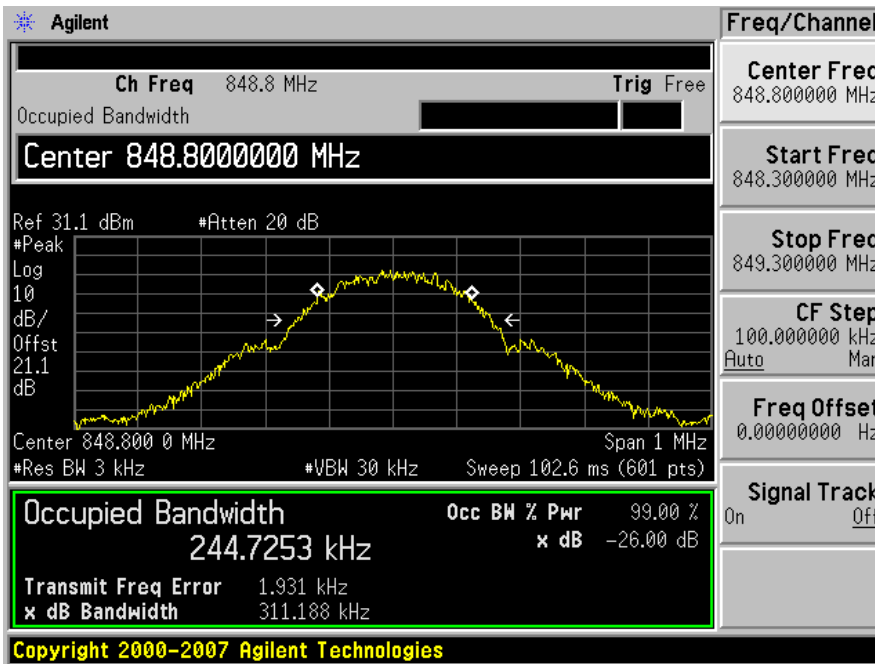


GSM 850 MHz Band (Downlink)

Low Channel (869.2 MHz)

Input

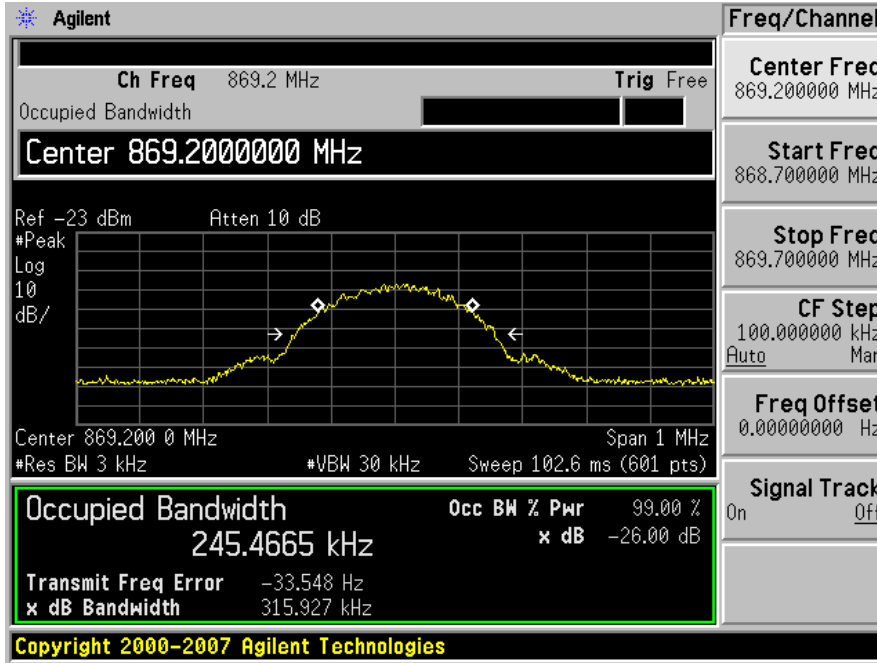


Output

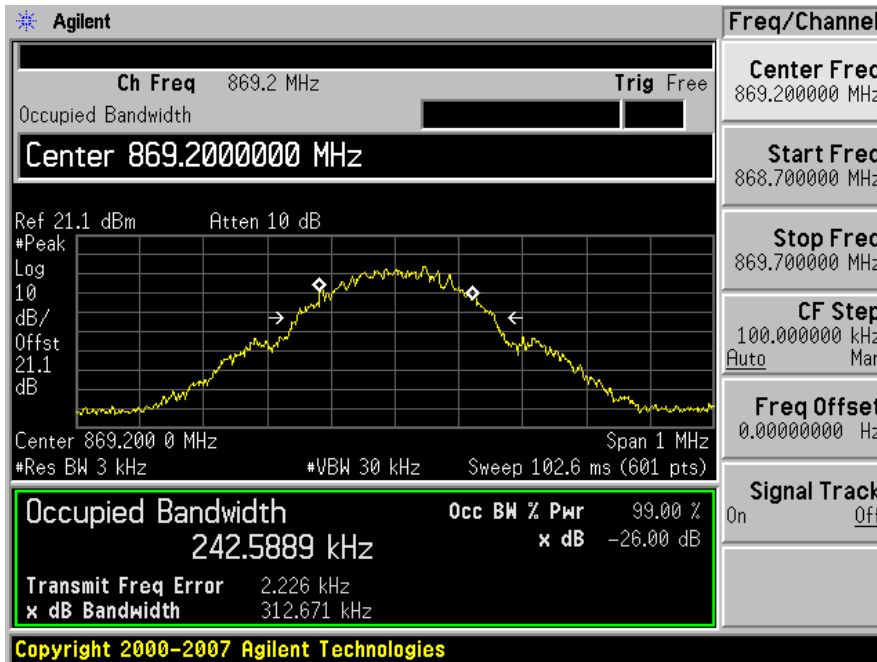


Middle Channel (881.6 MHz)

Input

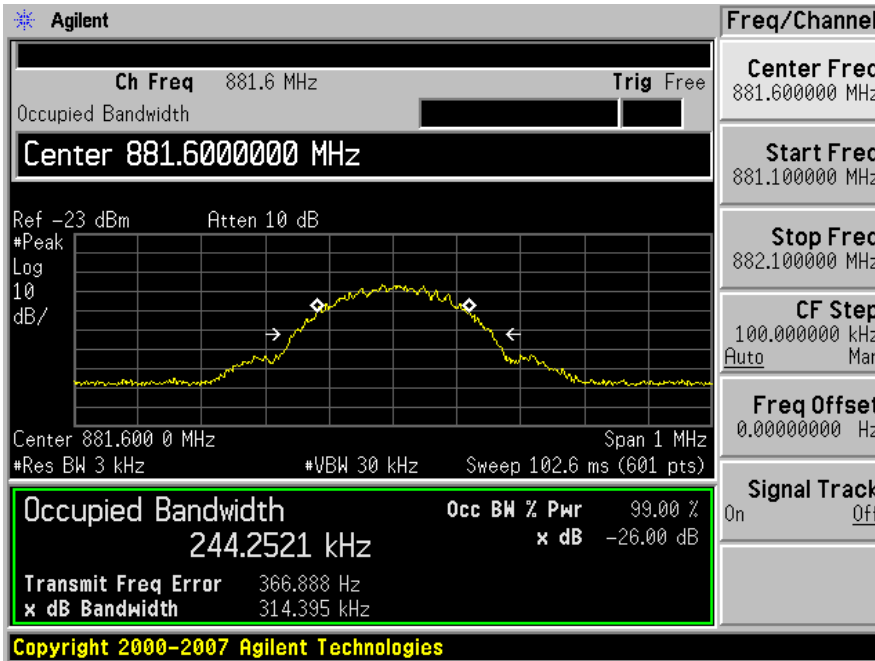


Output

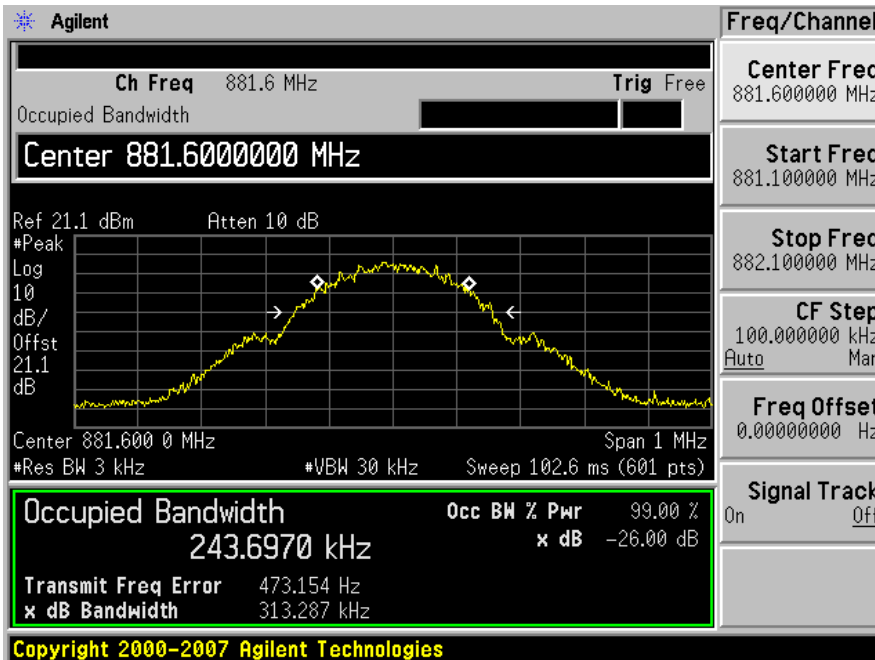


High Channel (893.8 MHz)

Input

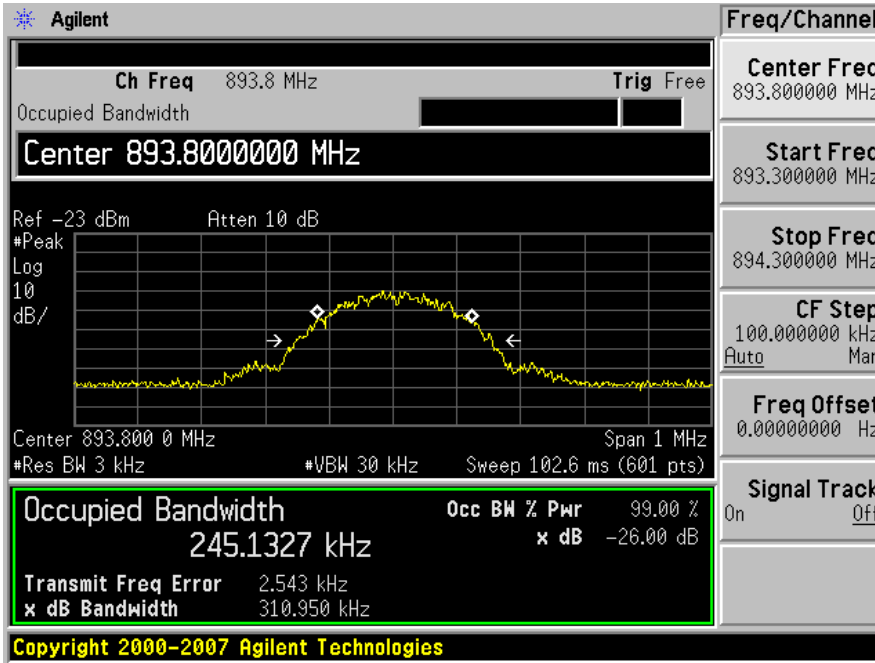


Output

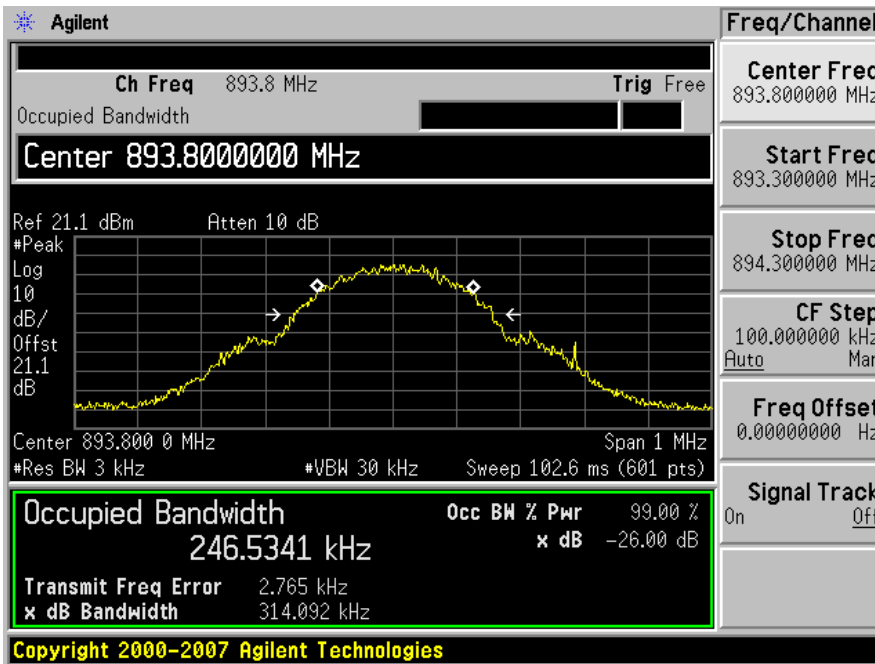


GSM 1900 MHz Band (Uplink)

Low Channel (1850.2 MHz)

Input

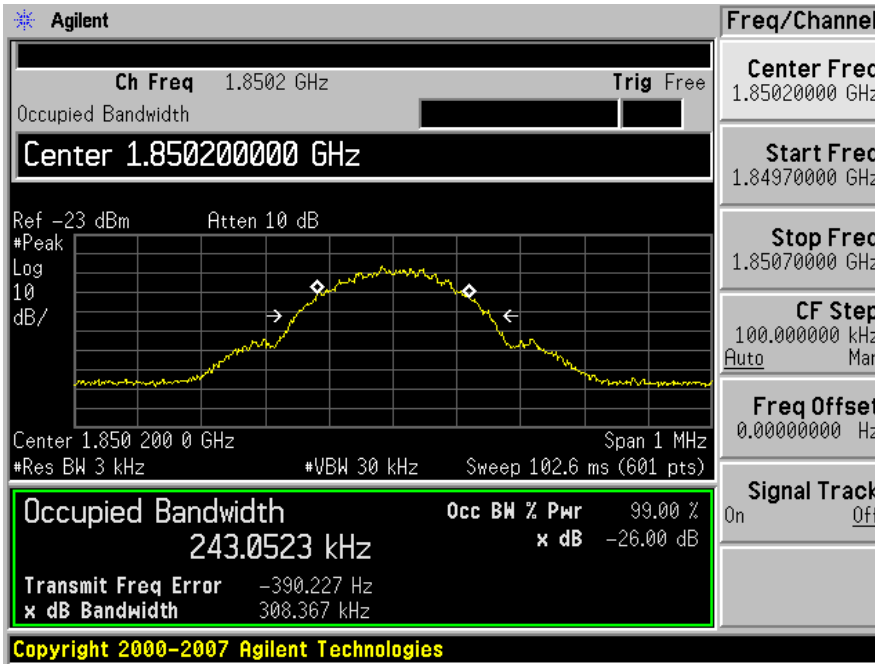


Output

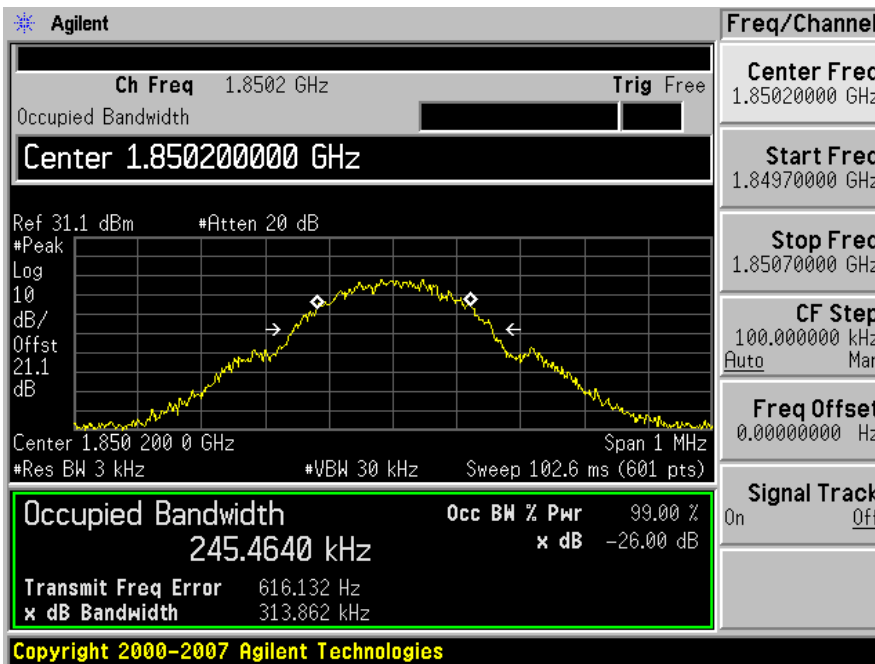


Middle Channel (1880 MHz)

Input

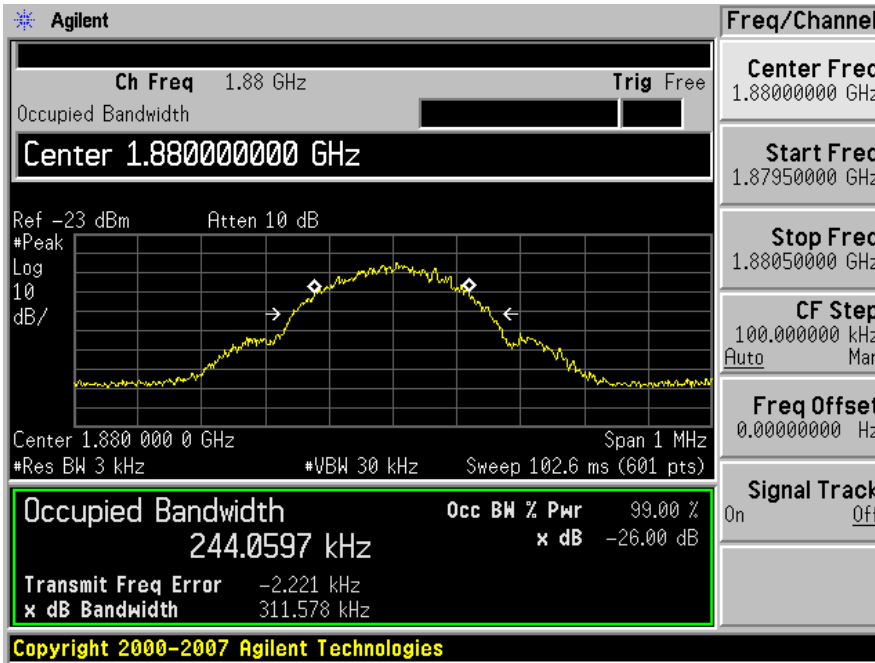


Output

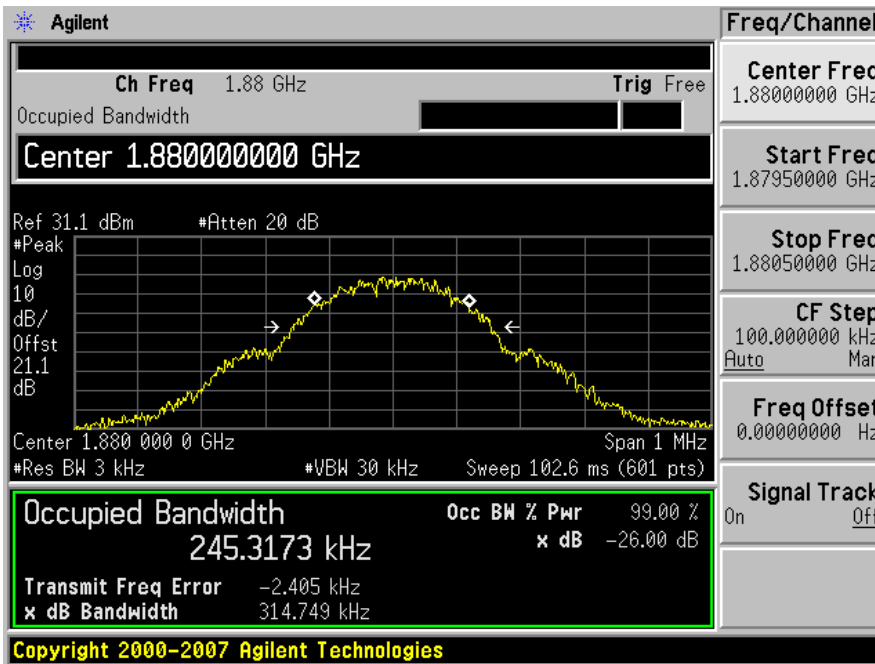


High Channel (1909.8 MHz)

Input

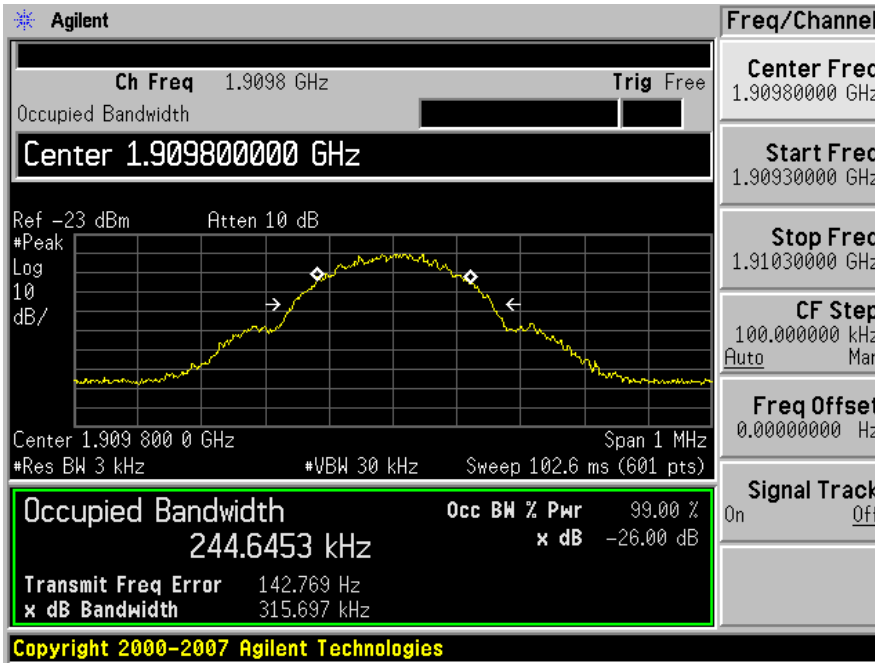


Output

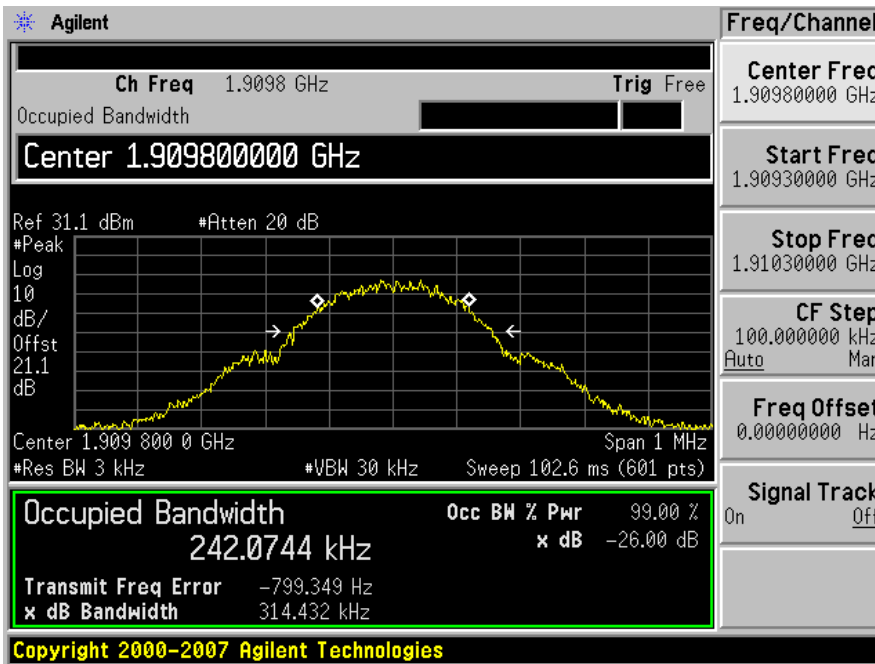


GSM 1900 MHz Band (Downlink)

Low Channel (1930.2 MHz)

Input

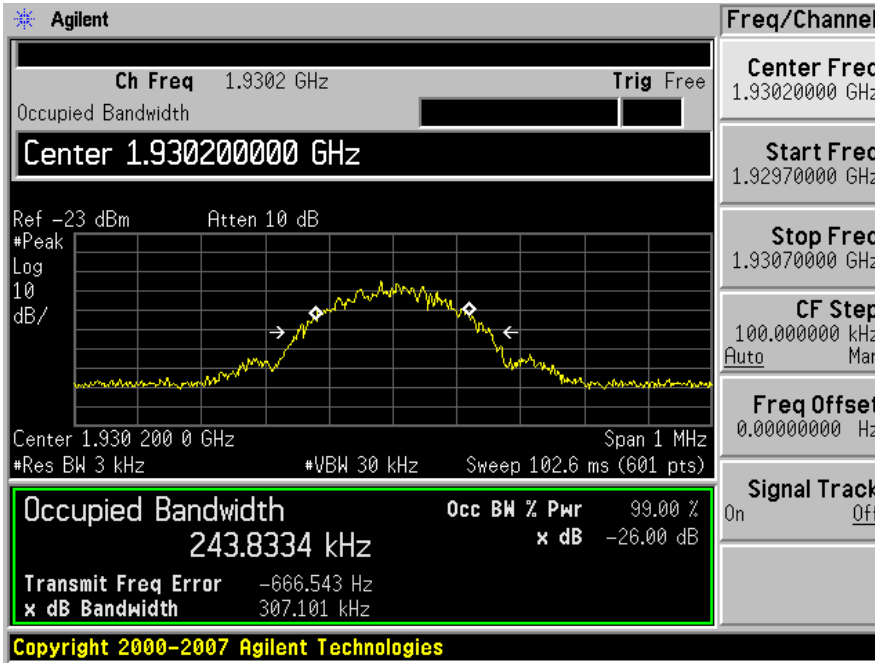

Output

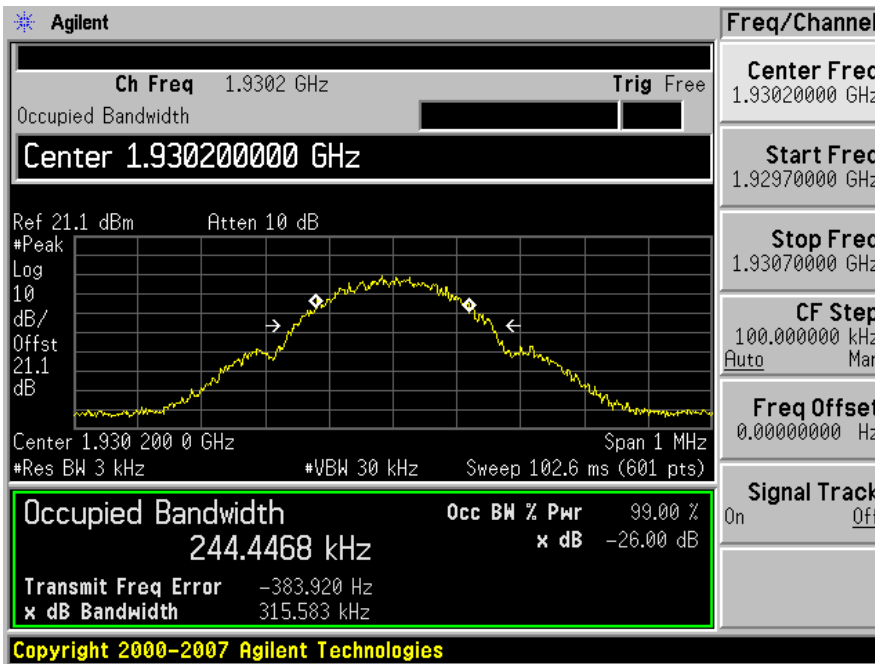


Middle Channel (1960 MHz)

Input




Output

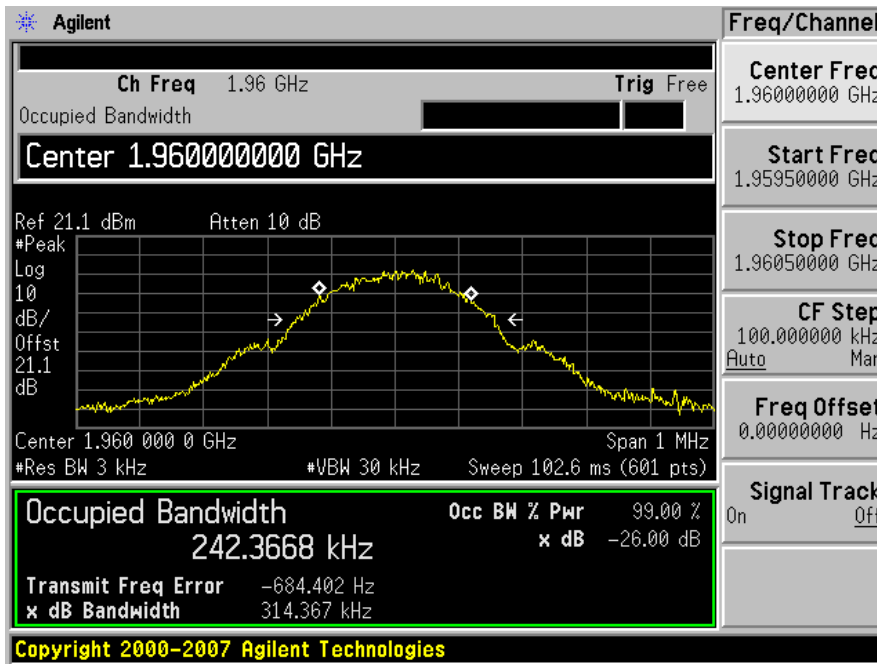


High Channel (1989.8 MHz)

Input

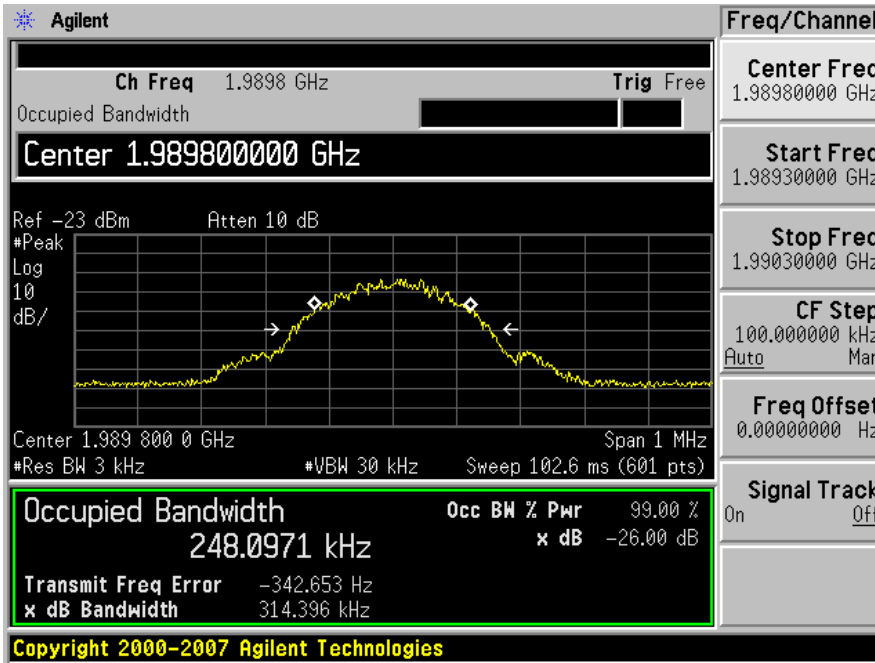


Output

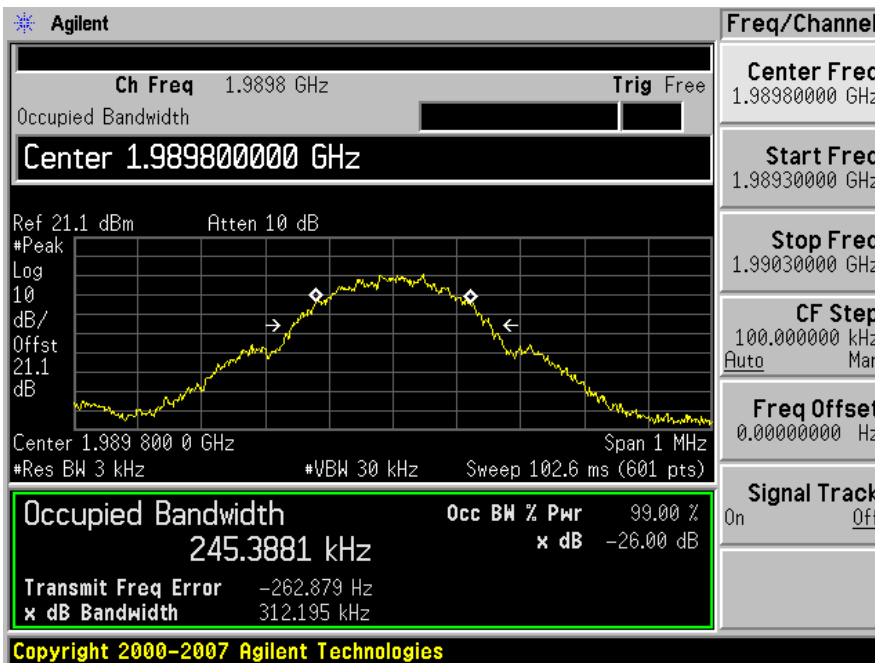


CDMA 850 MHz Band (Uplink)

Low Channel (824.73 MHz)

Input

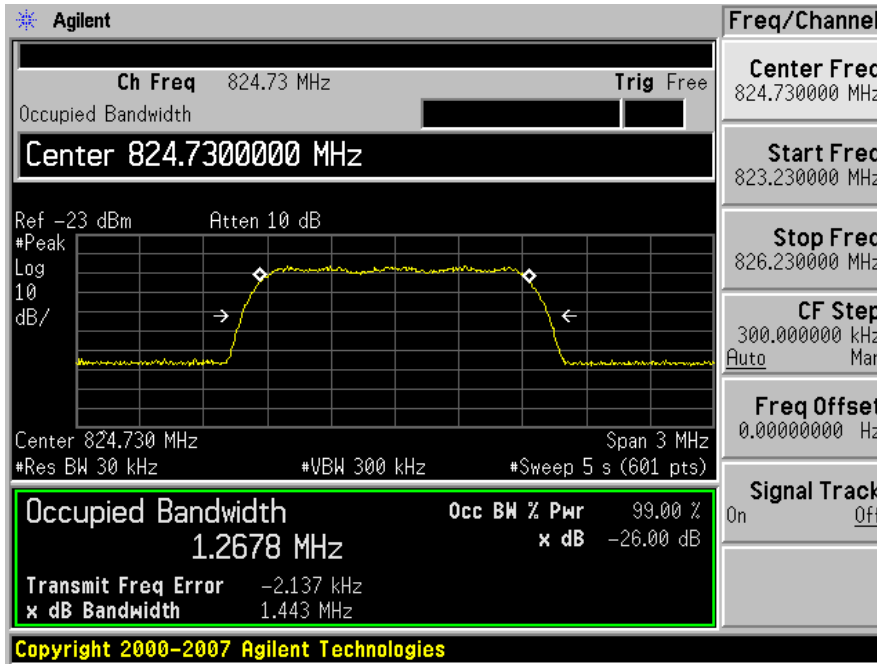


Output

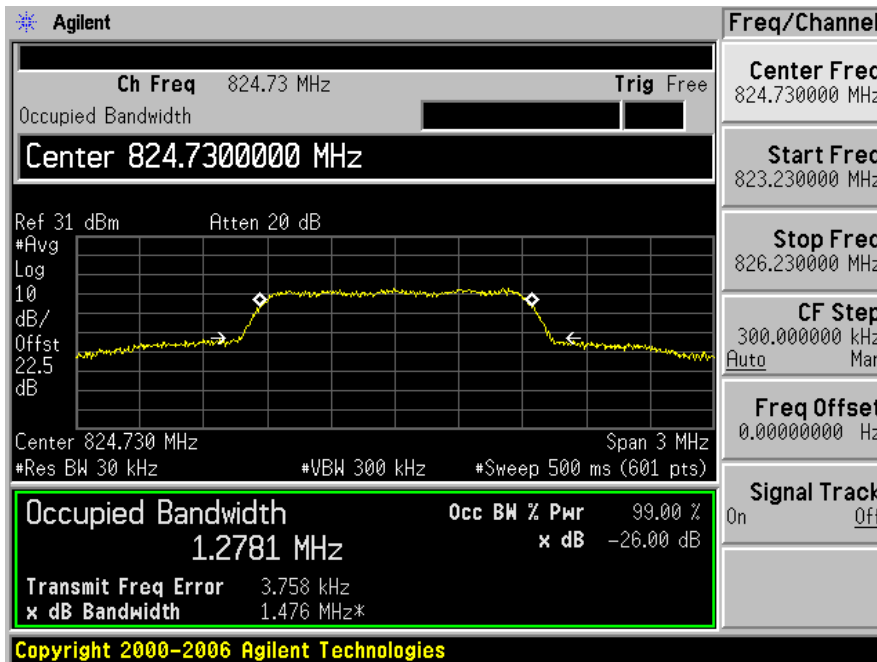


Middle Channel (836.4 MHz)

Input

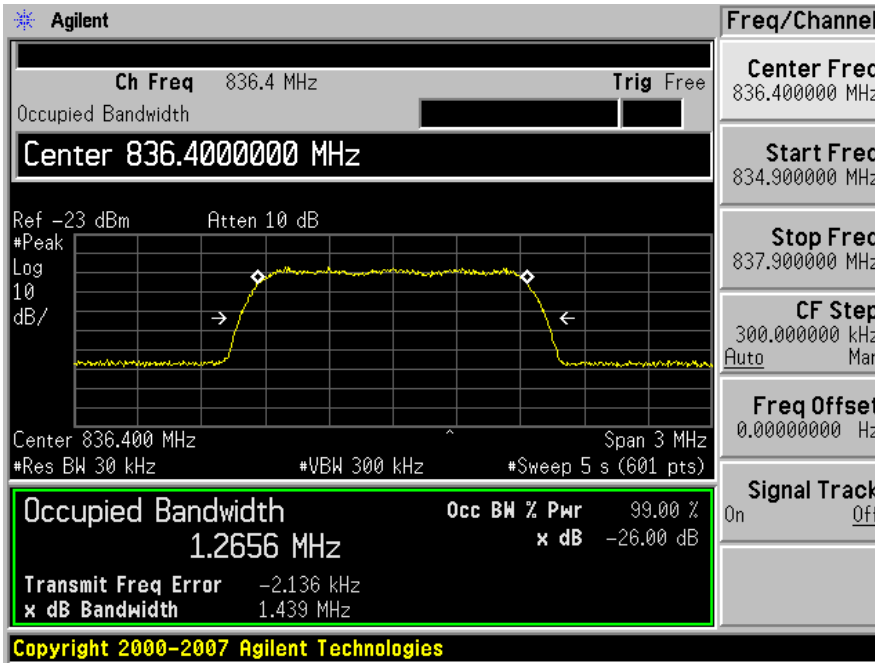


Output

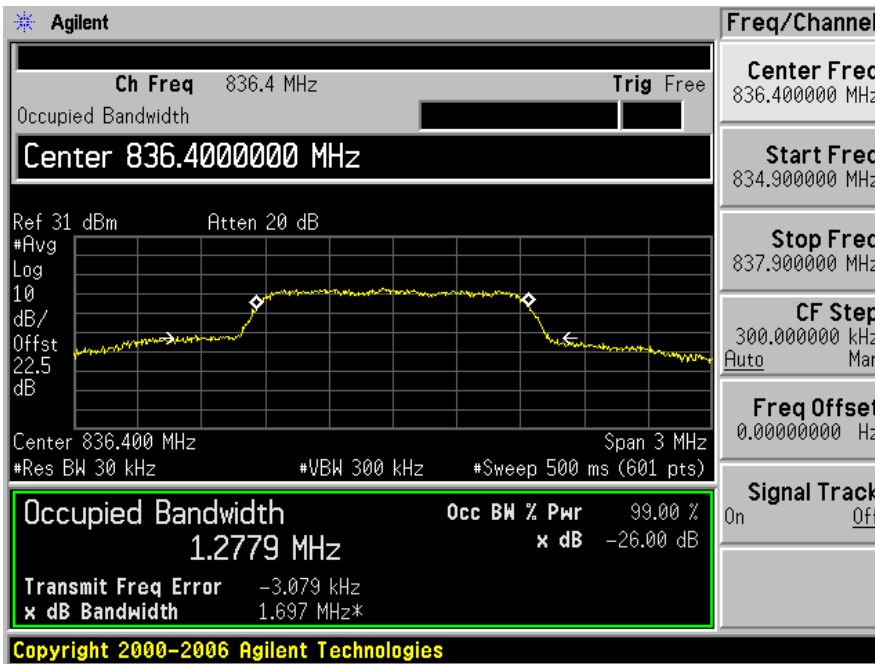


High Channel (848.19 MHz)

Input

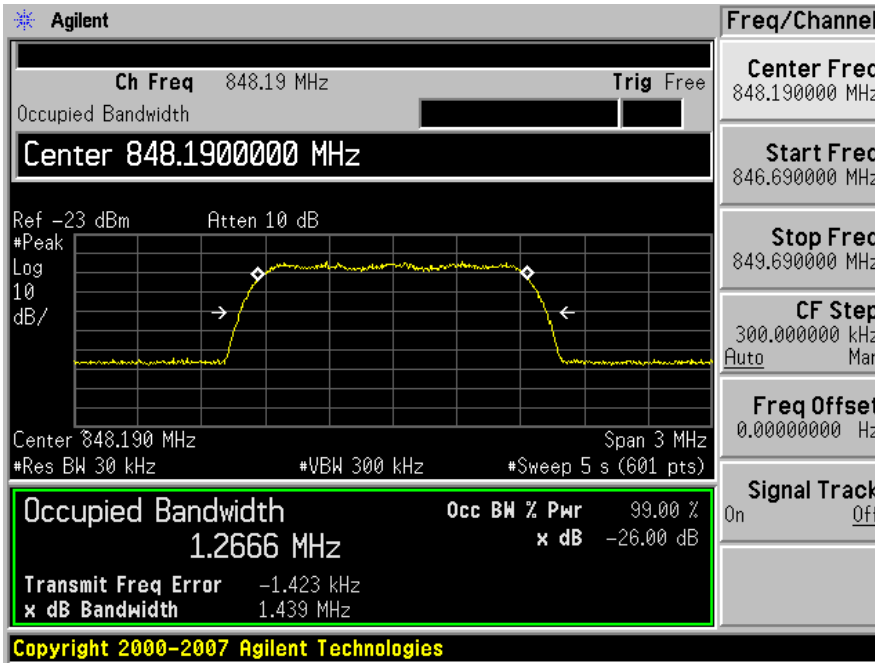


Output

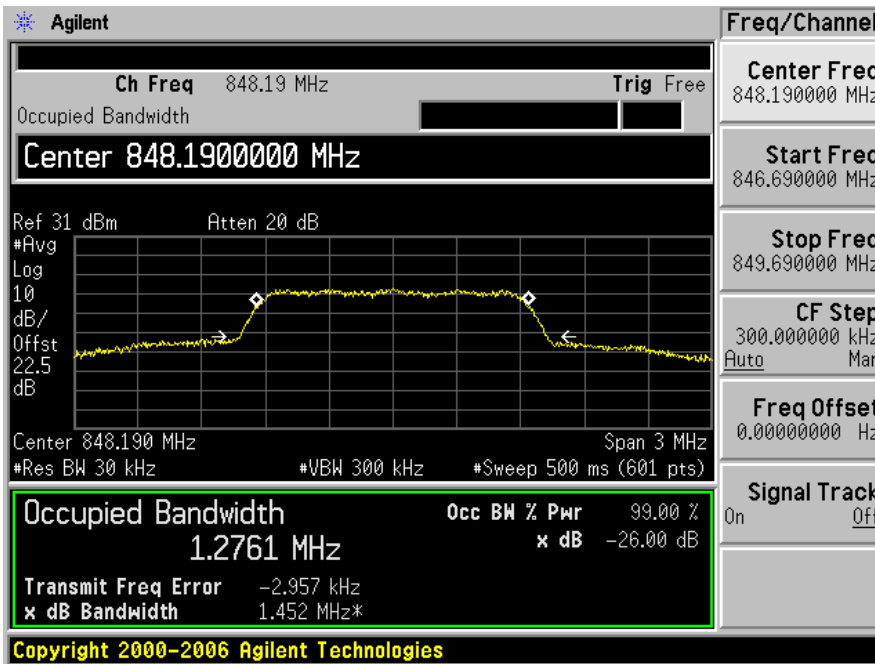


CDMA 850 MHz Band (Downlink)

Low Channel (869.73 MHz)

Input

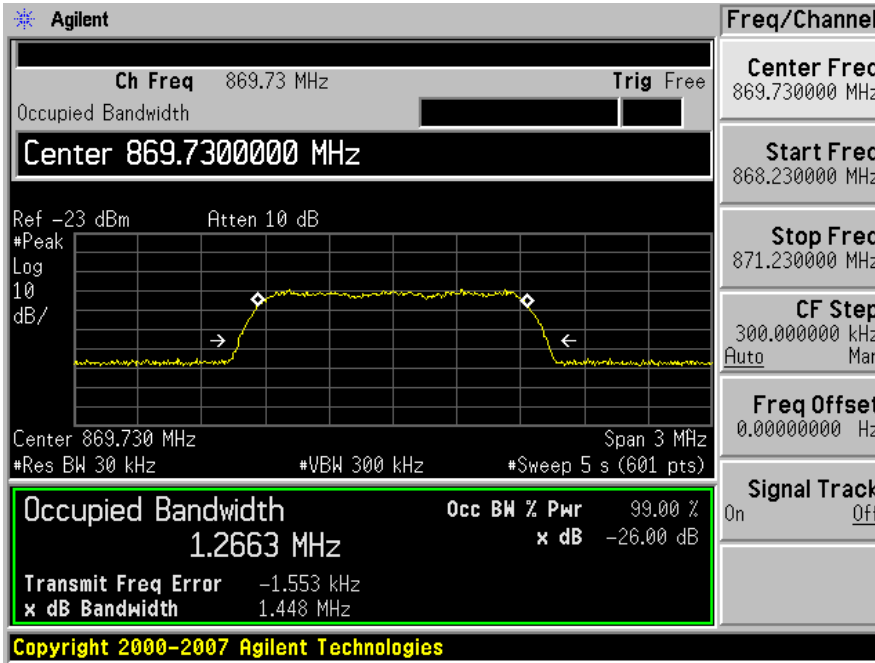


Output

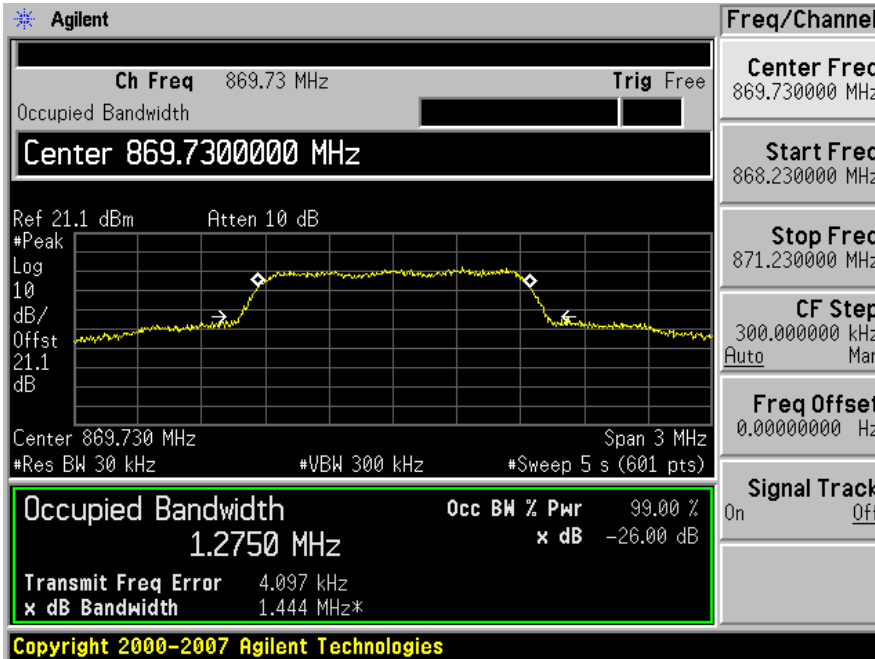


Middle Channel (881.4 MHz)

Input

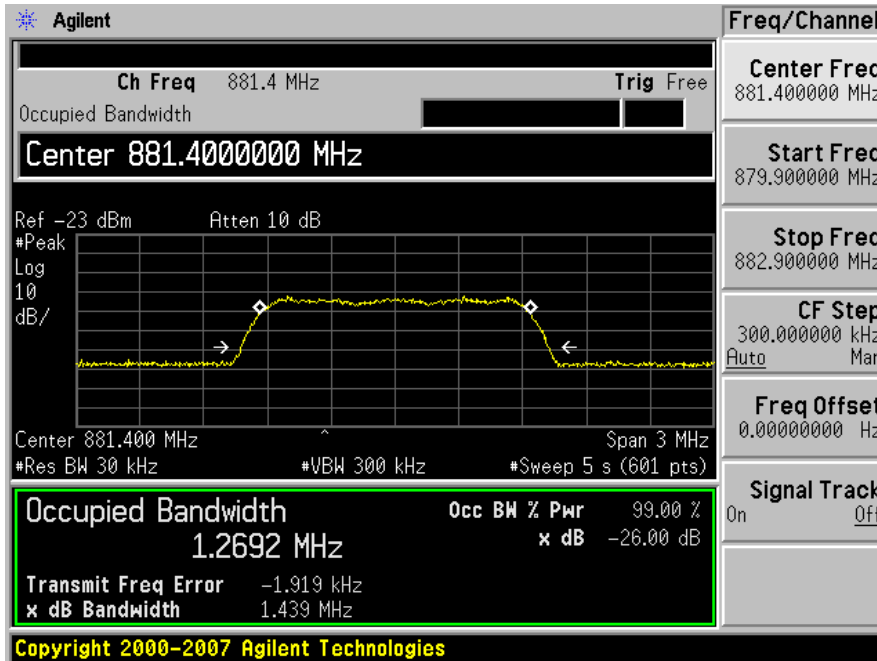


Output

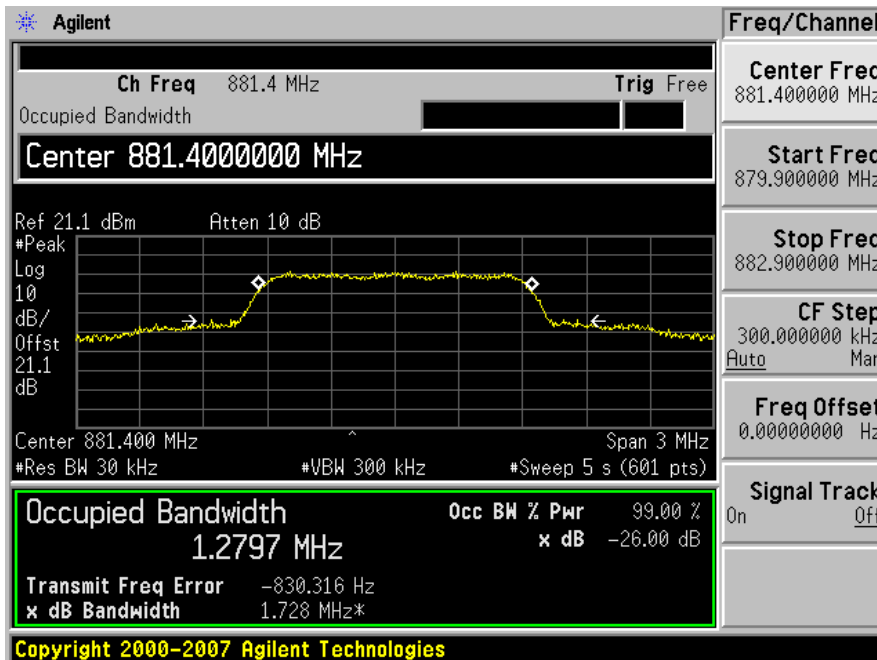


High Channel (893.19 MHz)

Input

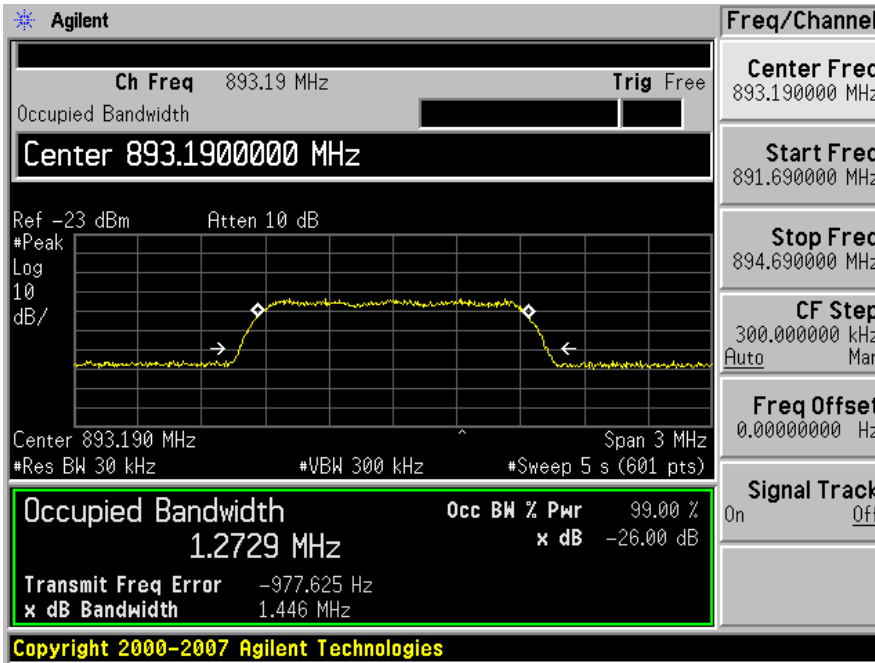


Output

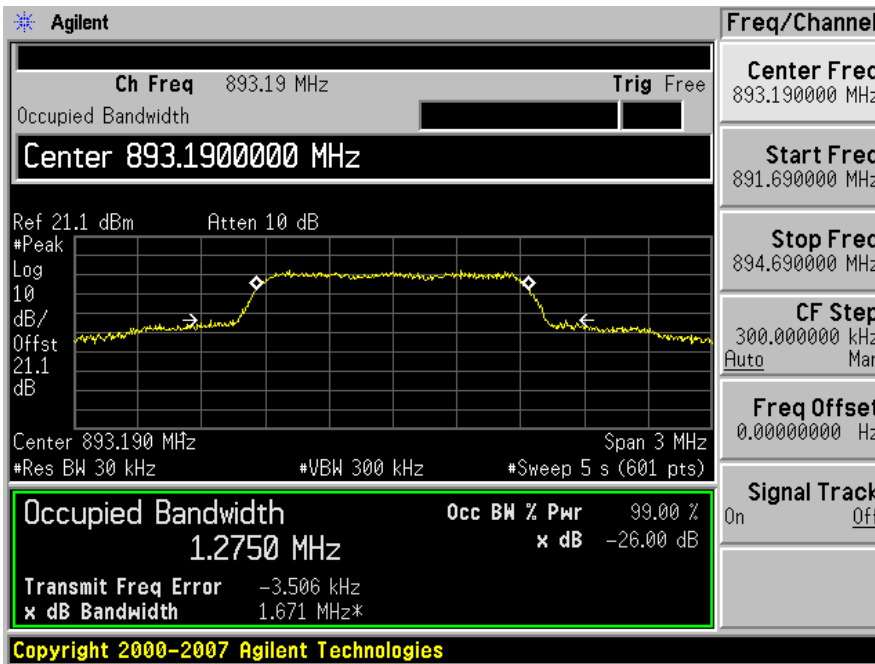


CDMA 1900 MHz Band (Uplink)

Low Channel (1851.25 MHz)

Input

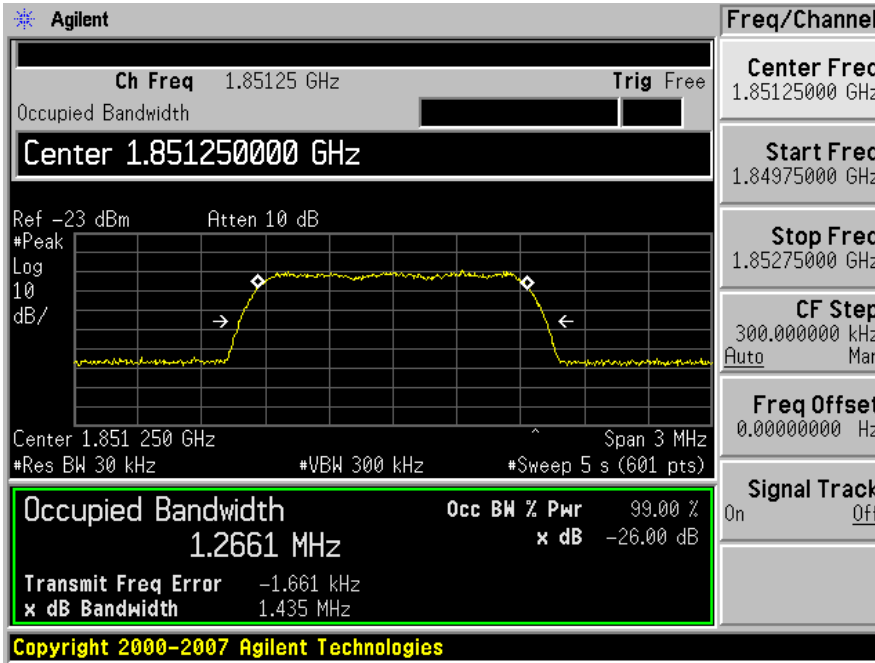


Output

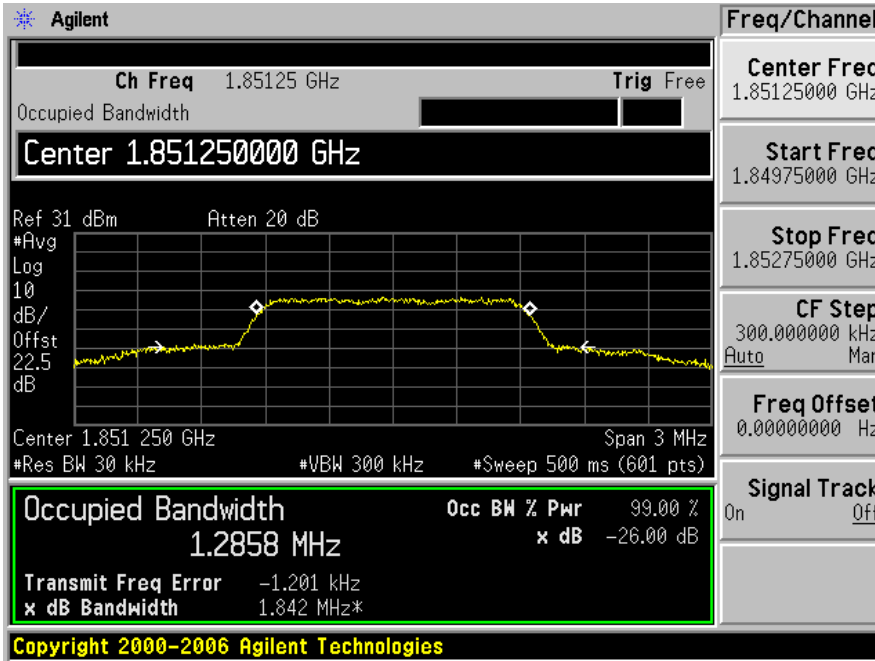


Middle Channel (1880 MHz)

Input

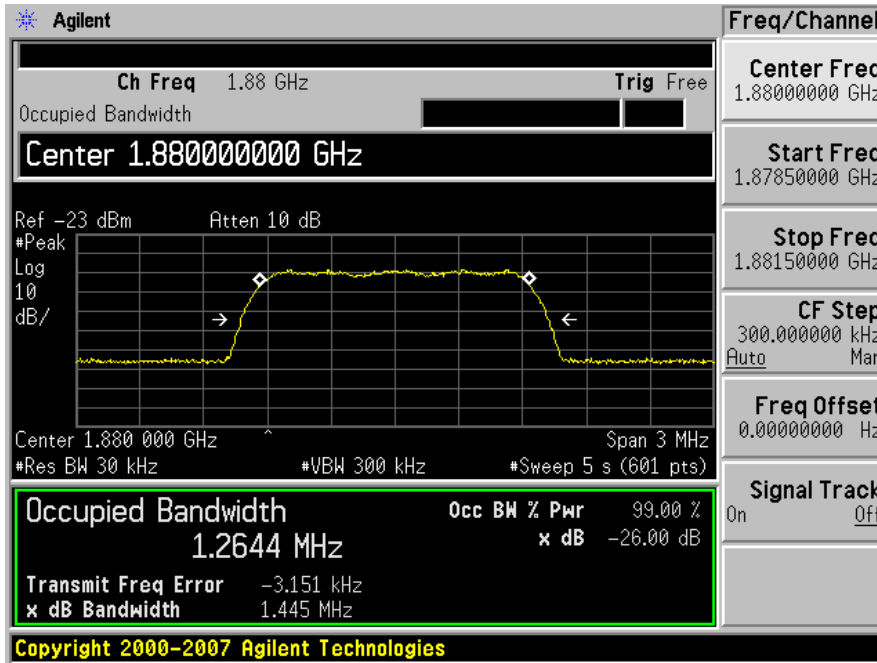


Output

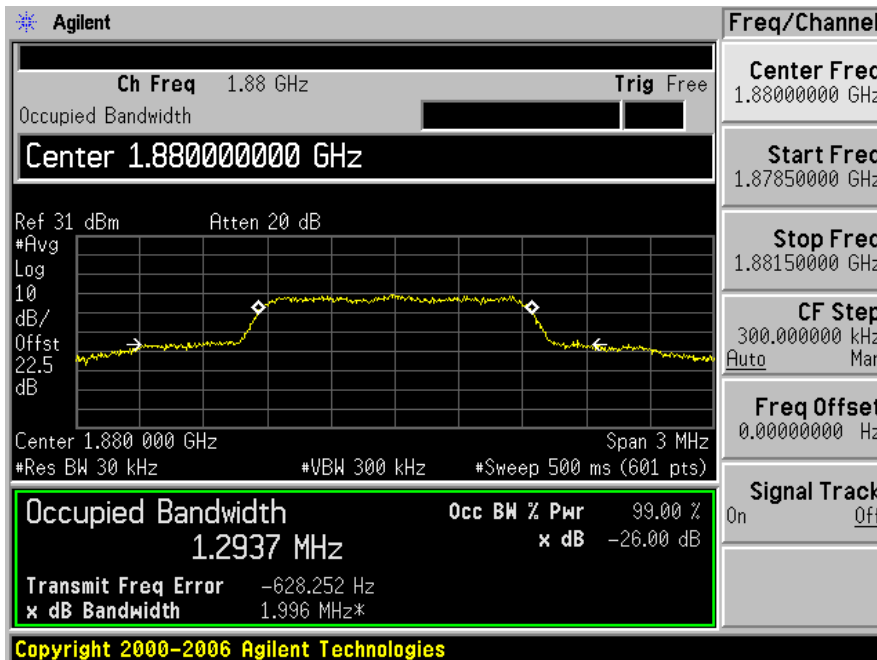


High Channel (1908.75 MHz)

Input

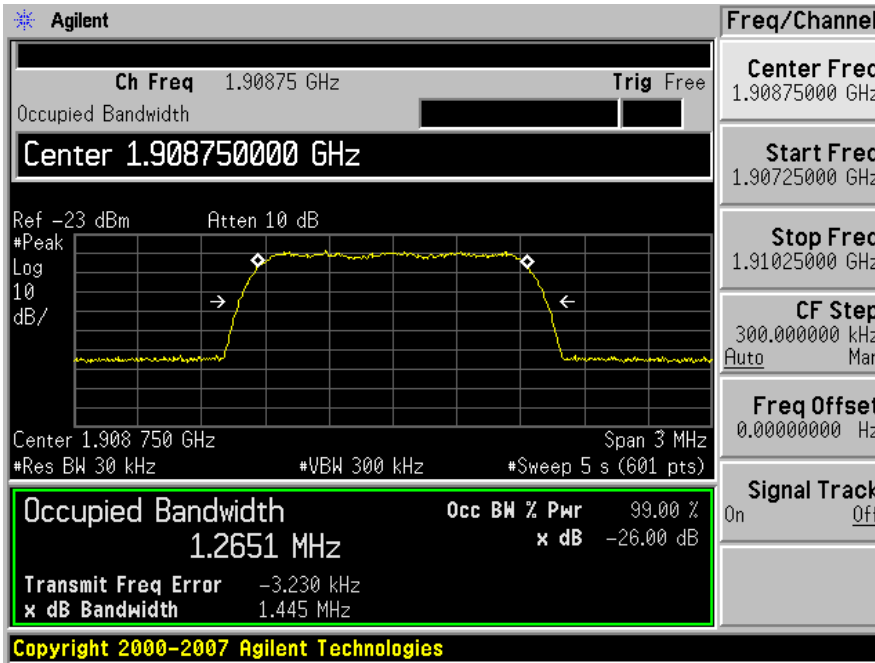


Output

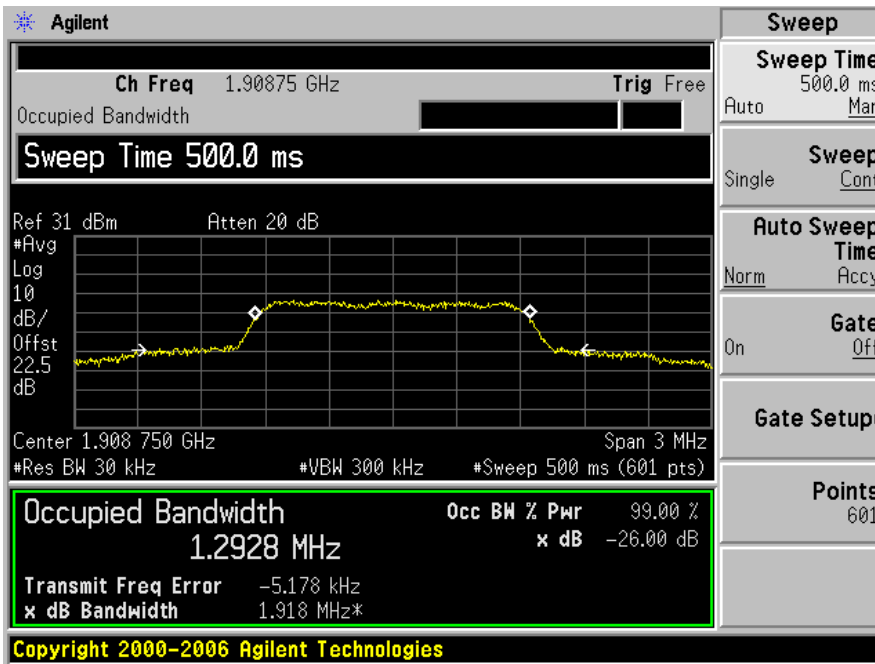


CDMA 1900 MHz Band (Downlink)

Low Channel (1931.25 MHz)

Input

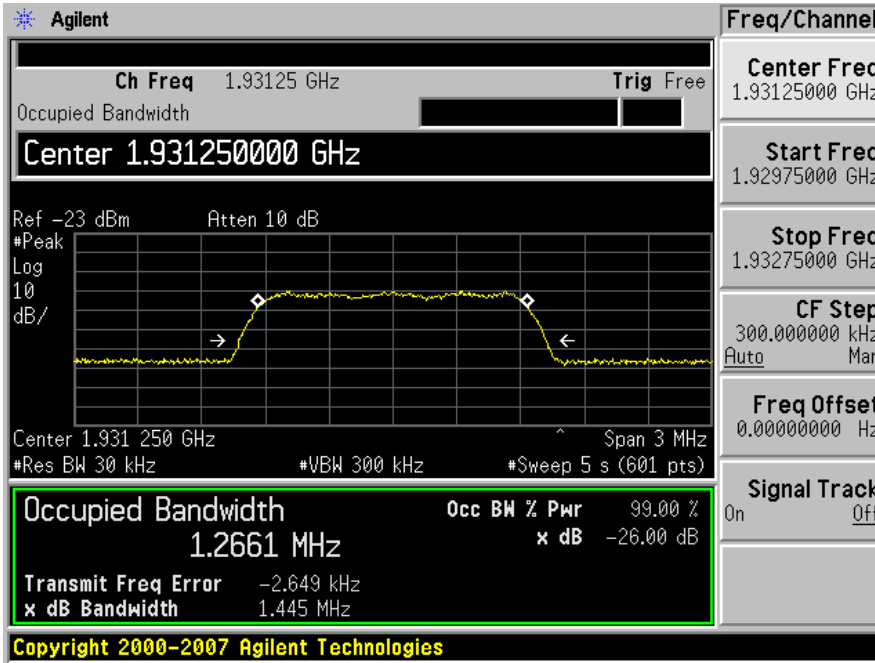


Output

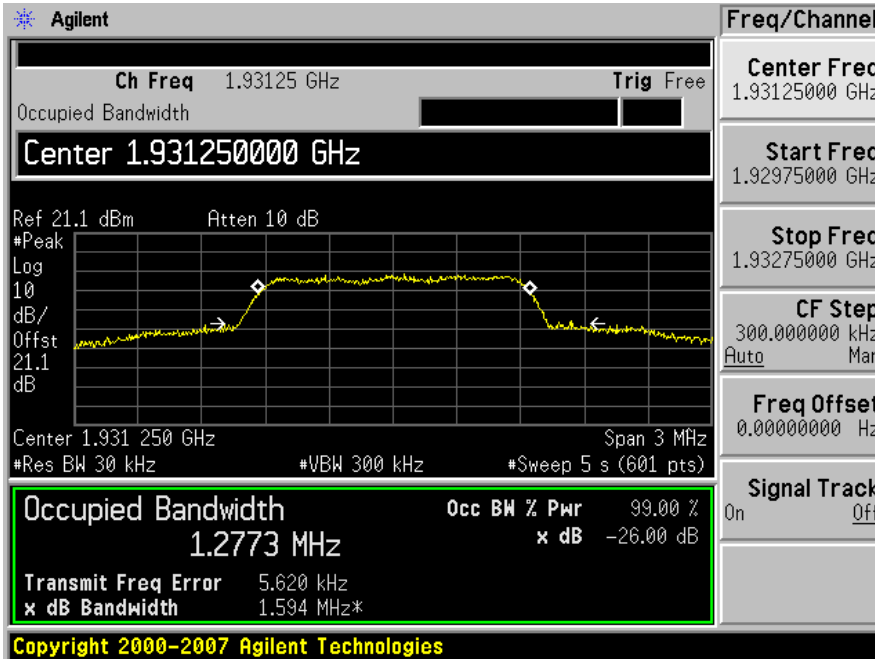


Middle Channel (1960 MHz)

Input

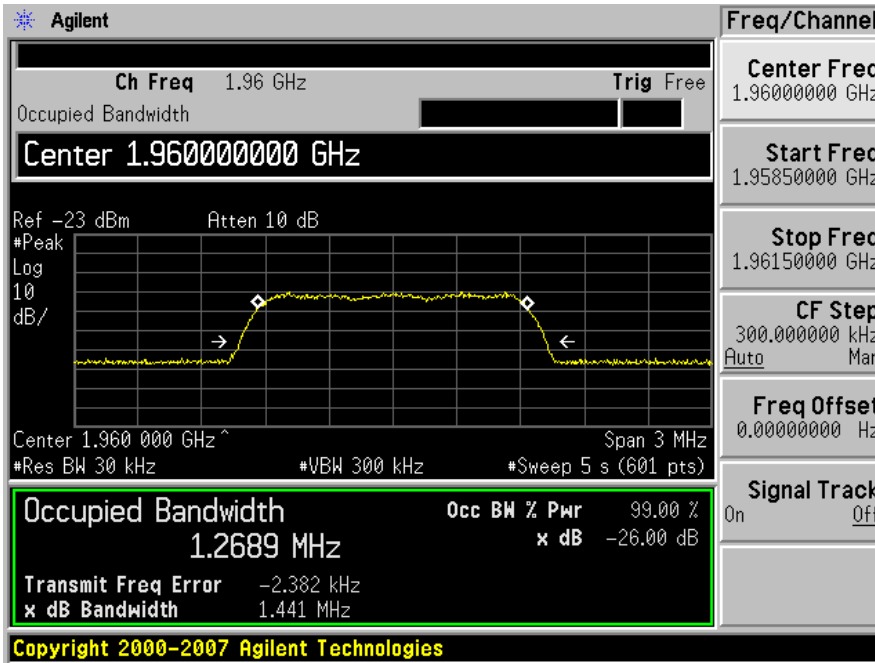


Output

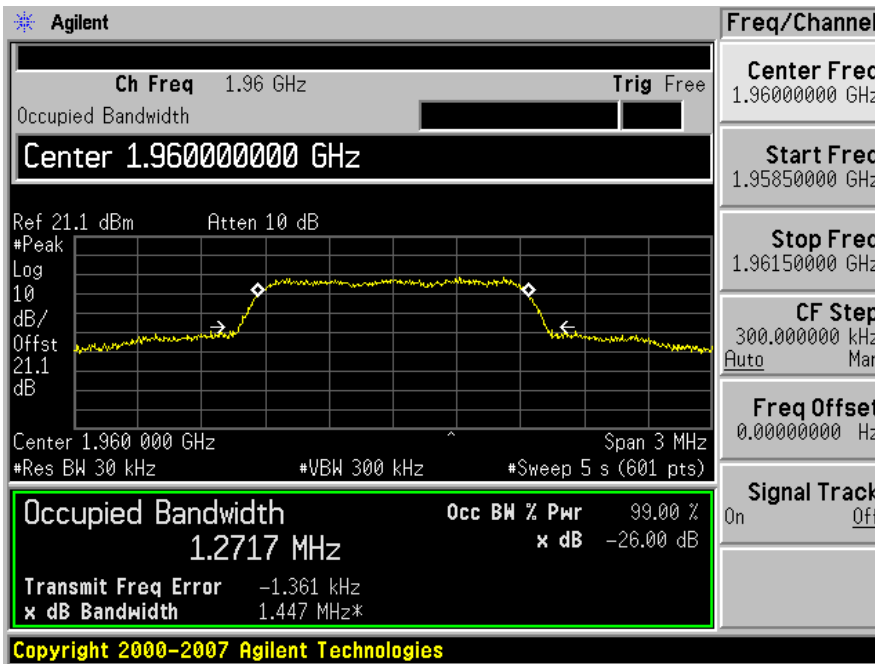


High Channel (1988.75 MHz)

Input

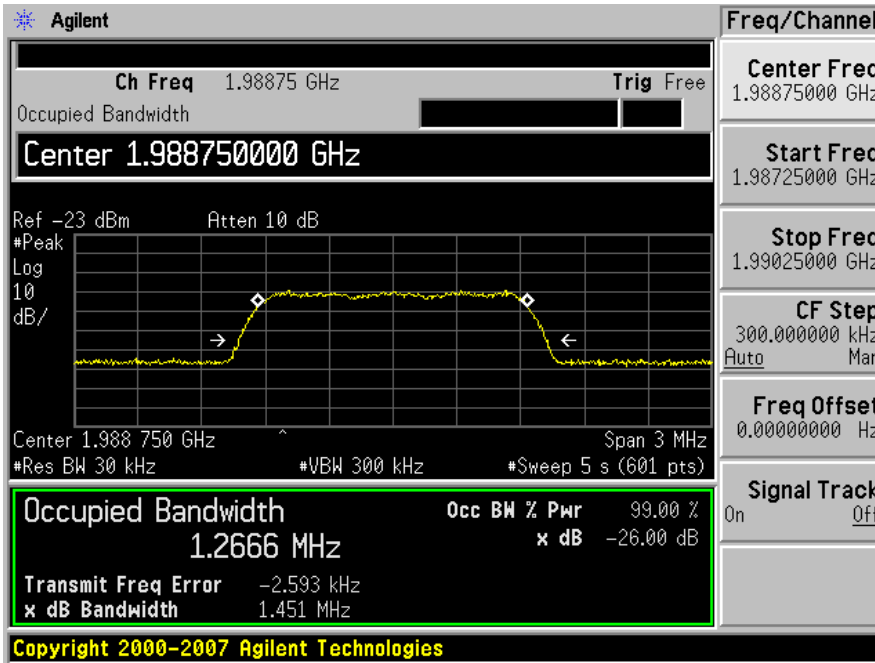

Output

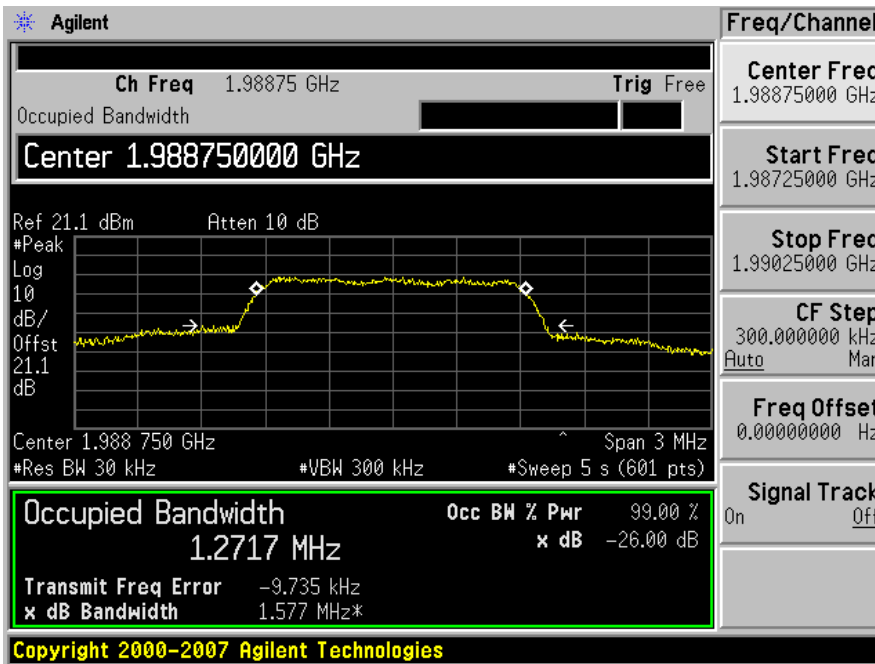

7 FCC §2.1053, §22.917 & §24.238 - SPURIOUS RADIATED EMISSIONS

7.1 Applicable Standard

Requirements: CFR 47, § 2.1053, § 22.917 and § 24.238

7.2 Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 log (TX Power in Watts/0.001) – the absolute level
Spurious attenuation limit in dB = 43 + 10 Log10 (power out in Watts)

7.3 Environmental Conditions

Temperature:	18~23 °C
Relative Humidity:	30~42 %
ATM Pressure:	101.1~102.1kPa

* The testing was performed by Jack Liu on 2009-6-11 at chamber 3

7.4 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
Agilent	Spectrum Analyzer	E4440A	MY44303352	2009-04-28
Sunol Sciences	Antenna	JB1	A020106-1	2009-04-17
A.R.A	Horn Antenna	DRG-118/A	1132	2008-07-28
A. H. Systems	Antenna, Horn, DRG	SAS-200/571	261	2008-07-01
Rohde & Schwarz	Generator, Signal	SMIQ03	849192/0085	2008-10-14
Ducommun	Pre-Amplifier	ALN-09173030-01	988251-03R	2009-03-04
HP	Pre-Amplifier	8447D	2944A06639	2009-03-06

* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

7.5 Summary of Test Results

Worst case reading as follows:

Mode: GSM 850 MHz Downlink			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Input Frequency
-37.10	1763.2	Horizontal	881.6

Mode: GSM 850 MHz Uplink			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Input Frequency
-38.68	1673.2	Horizontal	836.6

Mode: GSM 1900 MHz Downlink			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Input Frequency
-40.07	3920.0	Vertical	1960.0

Mode: GSM 1900 MHz Uplink			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Input Frequency
-32.77	3760.0	Horizontal	1880.0

Mode: CDMA 850 MHz Downlink			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Input Frequency
-31.27	1762.8	Horizontal	881.4

Mode: CDMA 850 MHz Uplink			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Input Frequency
-38.98	1672.8	Horizontal	836.4

Mode: CDMA 1900 MHz Downlink			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Input Frequency
-29.69	3920.0	Vertical	1960.0

Mode: CDMA 1900 MHz Uplink			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Input Frequency
-25.47	3760.0	Vertical	1880.0

7.6 Test Results

GSM 850 MHz band Downlink

Input frequency = 881.6 MHz

Indicated		Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Cord. (dB)	Cable Loss (dB)	Absolute Level (dBm)		
1763.2	50.34	18	100	V	1763.2	-62.21	9.3	0.36	-53.27	-13	-40.27
1763.2	51.12	103	100	H	1763.2	-59.04	9.3	0.36	-50.10	-13	-37.10

GSM 850 MHz band Uplink

Input frequency = 836.6 MHz

Indicated		Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Cord. (dB)	Cable Loss (dB)	Absolute Level (dBm)		
1673.2	48.11	13	150	V	1673.2	-65.30	9.3	0.36	-56.36	-13	-43.36
1673.2	49.91	201	100	H	1673.2	-60.62	9.3	0.36	-51.68	-13	-38.68

GSM 1900 MHz band Downlink

Input frequency = 1960 MHz

Indicated		Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Cord. (dB)	Cable Loss (dB)	Absolute Level (dBm)		
3920.0	39.75	200	156	V	3920	-63.27	10.8	0.6	-53.07	-13	-40.07
3920.0	39.11	136	240	H	3920	-65.88	10.8	0.6	-55.68	-13	-42.68

GSM 1900 MHz band Uplink

Input frequency = 1880 MHz

Indicated		Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Cord. (dB)	Cable Loss (dB)	Absolute Level (dBm)		
3760.0	46.97	349	100	V	3760	-55.88	10.6	0.58	-45.86	-13	-32.86
3760.0	49.36	334	131	H	3760	-55.79	10.6	0.58	-45.77	-13	-32.77

CDMA 850 MHz band Downlink

Input frequency = 881.4 MHz

Indicated		Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Cord. (dB)	Cable Loss (dB)	Absolute Level (dBm)		
1762.8	55.34	18	100	V	1762.8	-57.21	9.3	0.36	-48.27	-13	-35.27
1762.8	56.95	106	100	H	1762.8	-53.21	9.3	0.36	-44.27	-13	-31.27

CDMA 850 MHz band Uplink

Input frequency = 836.4 MHz

Indicated		Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Cord. (dB)	Cable Loss (dB)	Absolute Level (dBm)		
1672.8	48.35	20	142	V	1672.8	-65.06	9.3	0.36	-56.12	-13	-43.12
1672.8	49.61	56	150	H	1672.8	-60.92	9.3	0.36	-51.98	-13	-38.98

CDMA 1900 MHz band Downlink

Input frequency = 1960 MHz

Indicated		Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Cord. (dB)	Cable Loss (dB)	Absolute Level (dBm)		
3920.0	50.13	205	167	V	3920	-52.89	10.8	0.6	-42.69	-13	-29.69
3920.0	48.36	139	220	H	3920	-56.63	10.8	0.6	-46.43	-13	-33.43

CDMA 1900 MHz band Uplink

Input frequency = 1880 MHz

Indicated		Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Cord. (dB)	Cable Loss (dB)	Absolute Level (dBm)		
3760.0	54.36	3	150	V	3760	-48.49	10.6	0.58	-38.47	-13	-25.47
3760.0	54.78	309	158	H	3760	-50.37	10.6	0.58	-40.35	-13	-27.35

8 FCC §2.1051, §22.917& §24.238- SPURIOUS EMISSIONS AT ANTENNA TERMINALS

8.1 Applicable Standard

Requirements: CFR 47, § 2.1051, § 22.917, § 24.238.

The spectrum shall be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1057.

§ 22.917: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB

8.2 Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

8.3 Environmental Conditions

Temperature:	18~23 °C
Relative Humidity:	30~42 %
ATM Pressure:	101.1~102.1kPa

* The testing was performed by Jack Liu on 2009-8-03 ~ 2009-8-10

8.4 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
Rohde & Schwarz	Generator, Signal	SMIQ03	849192/0085	2008-10-14
Agilent	Spectrum Analyzer	E4440A	MY44303352	2009-04-28
HP	Generator, Signal	8648C	3426M00143	2009-02-25


* **Statement of Traceability: BA CL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

8.5 Test Results


Please refer to the hereinafter plots.

GSM 850 MHz band Low channel Uplink:

Input

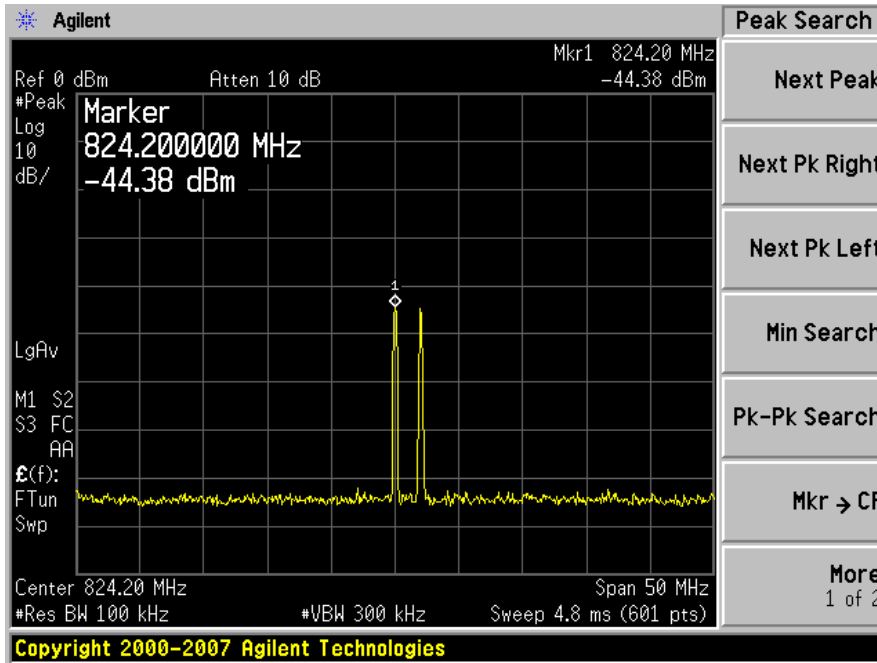


Output

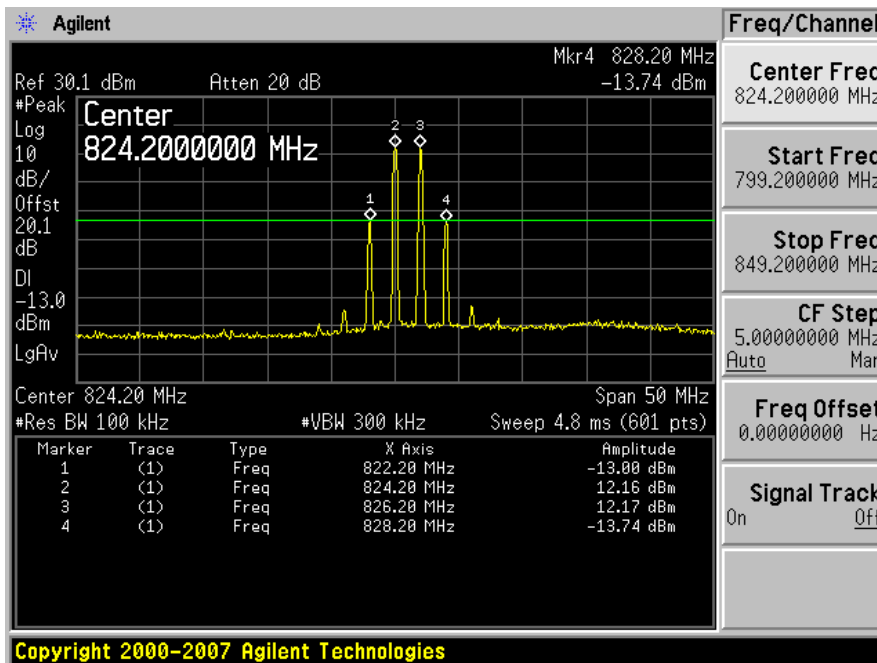


GSM 850 MHz band High channel Uplink:

Input

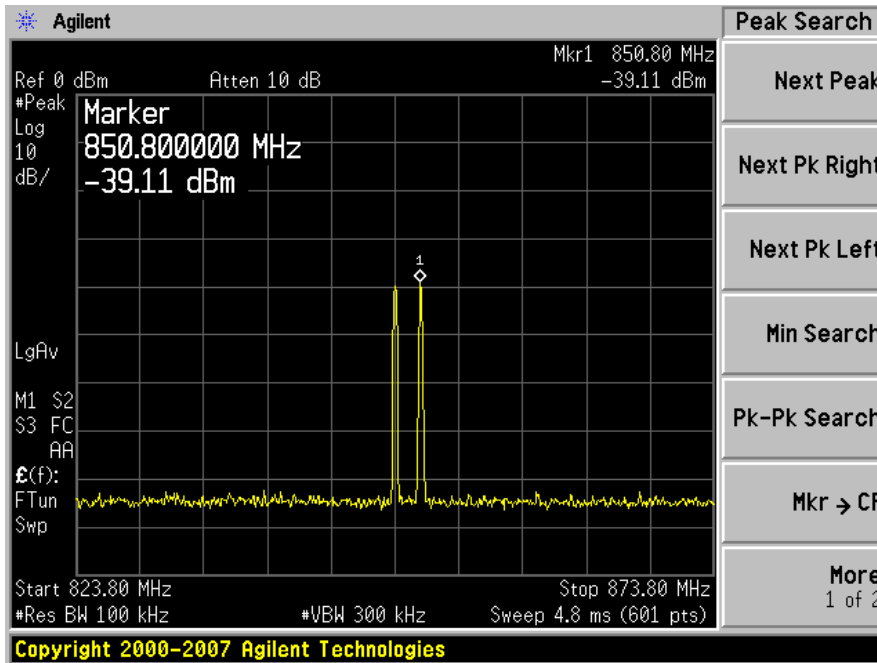


Output

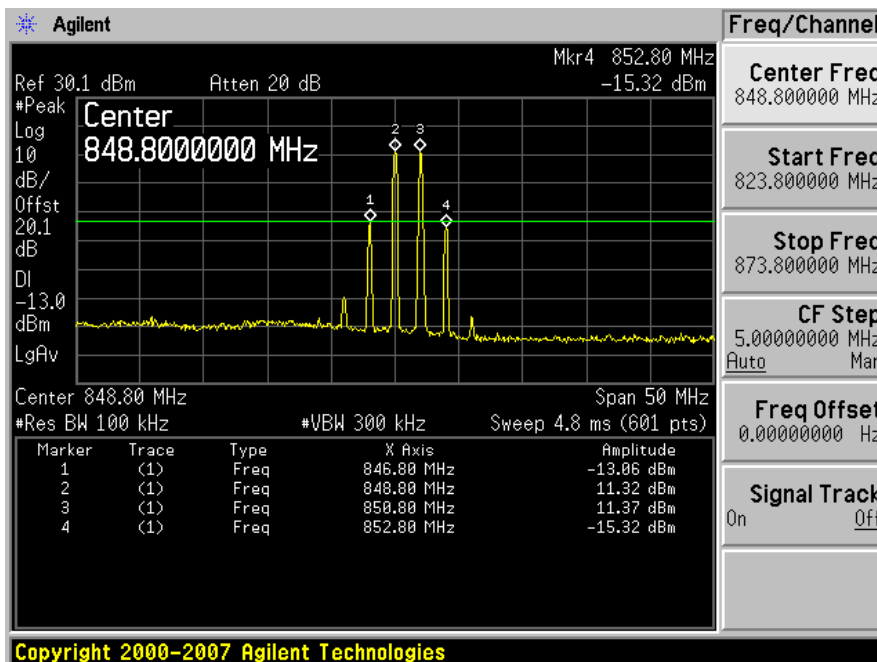


GSM 1900 MHz band Low channel Uplink:

Input

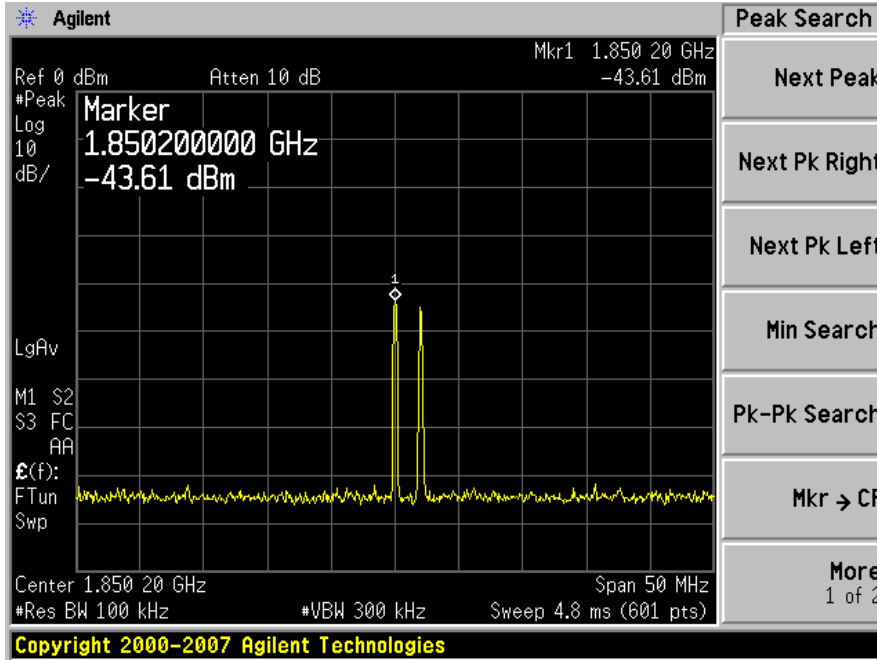


Output

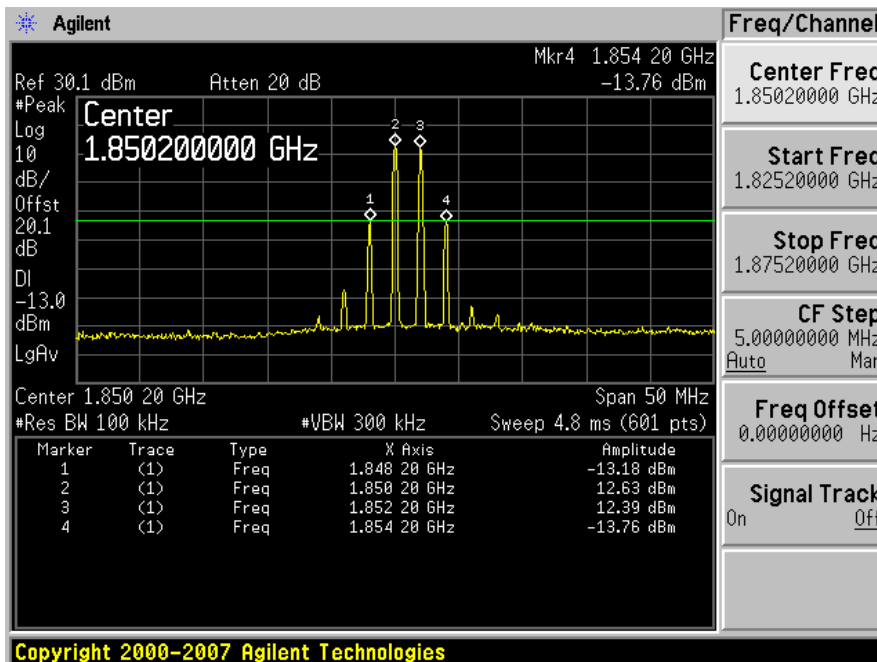


GSM 1900 MHz band High channel Uplink:

Input

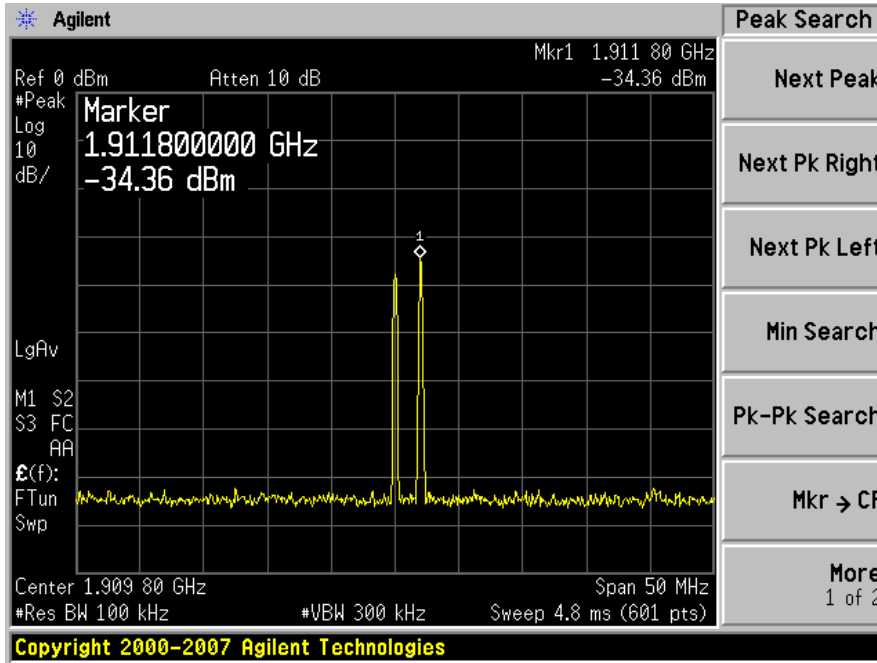


Output

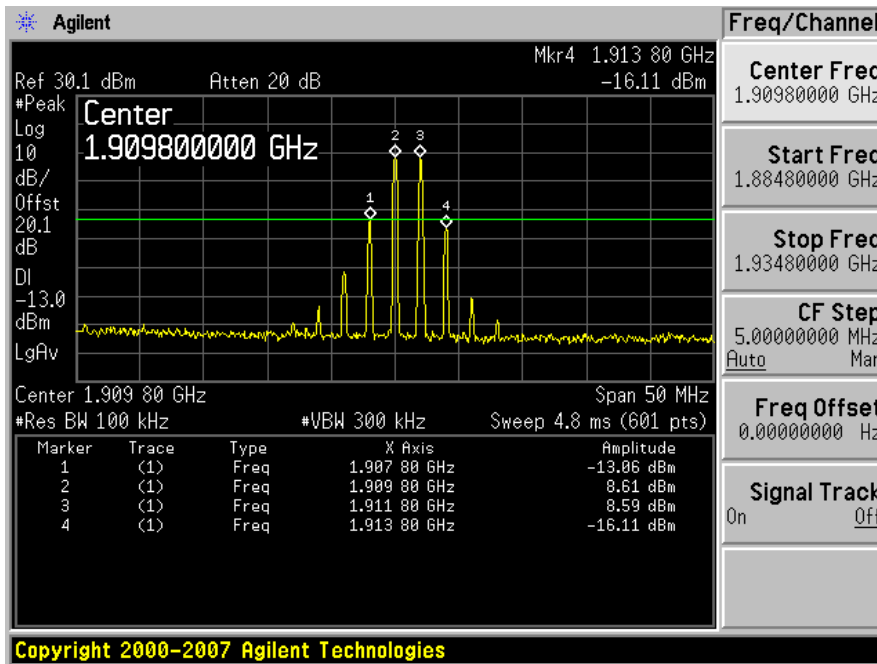


GSM 850 MHz band Low channel Downlink:

Input

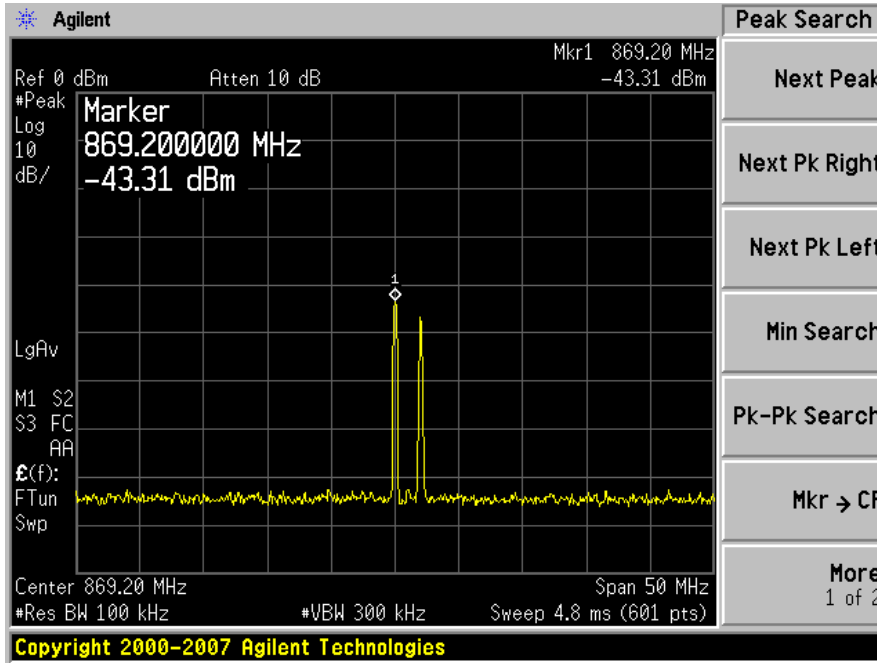


Output

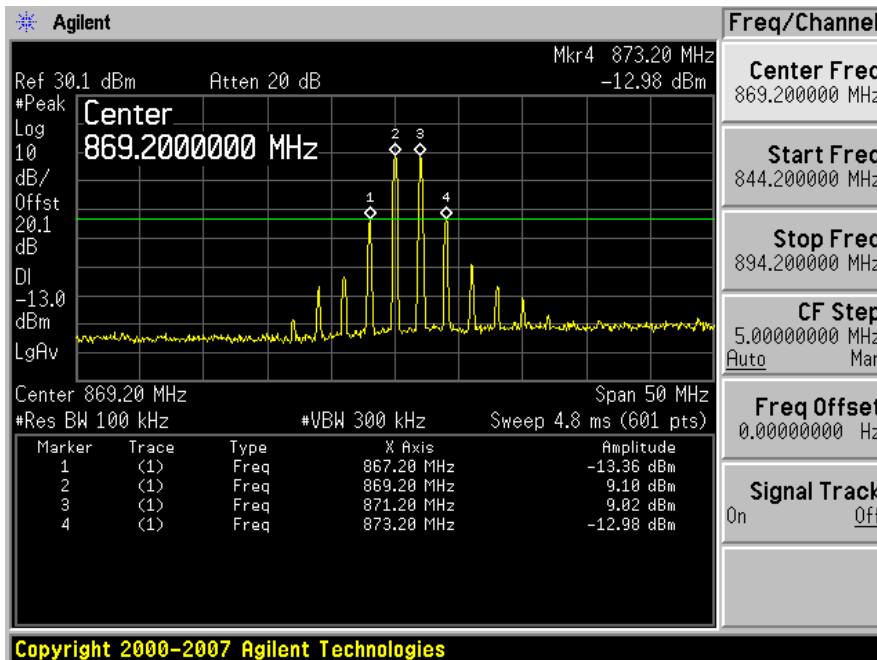


GSM 850 MHz band High channel Downlink:

Input

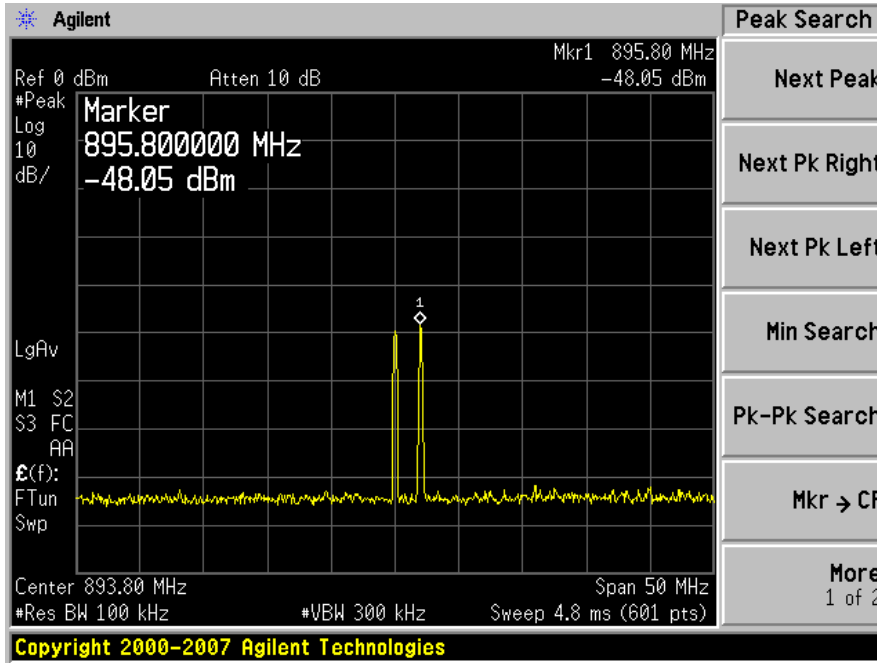


Output

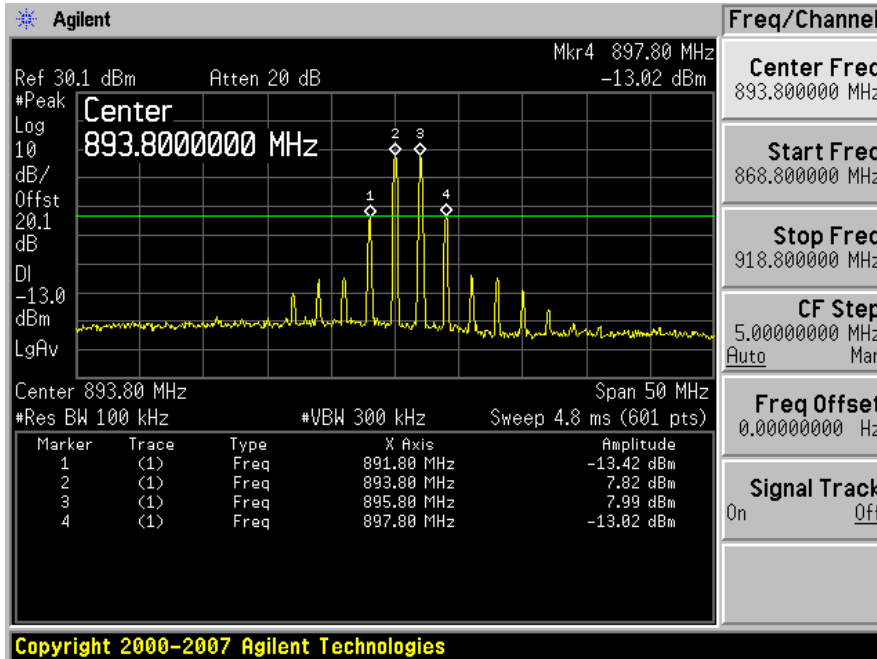


GSM 1900 MHz band Low channel Downlink:

Input

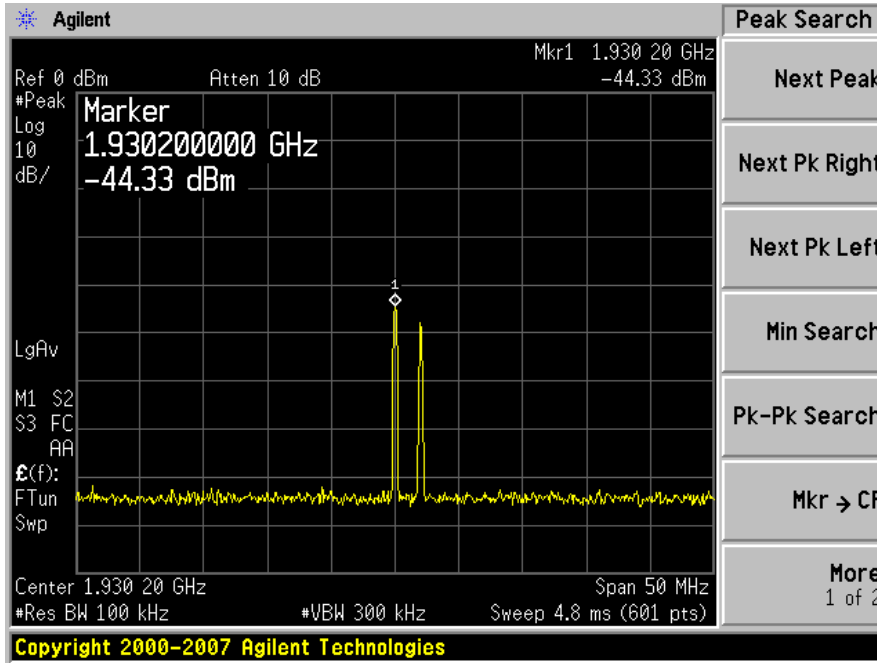


Output

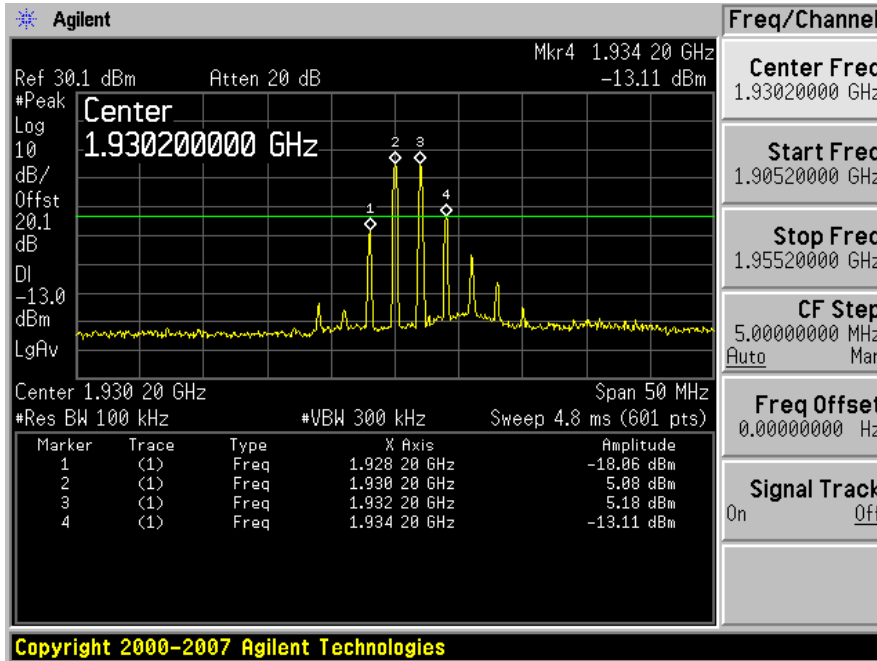


GSM 1900 MHz band High channel Downlink:

Input

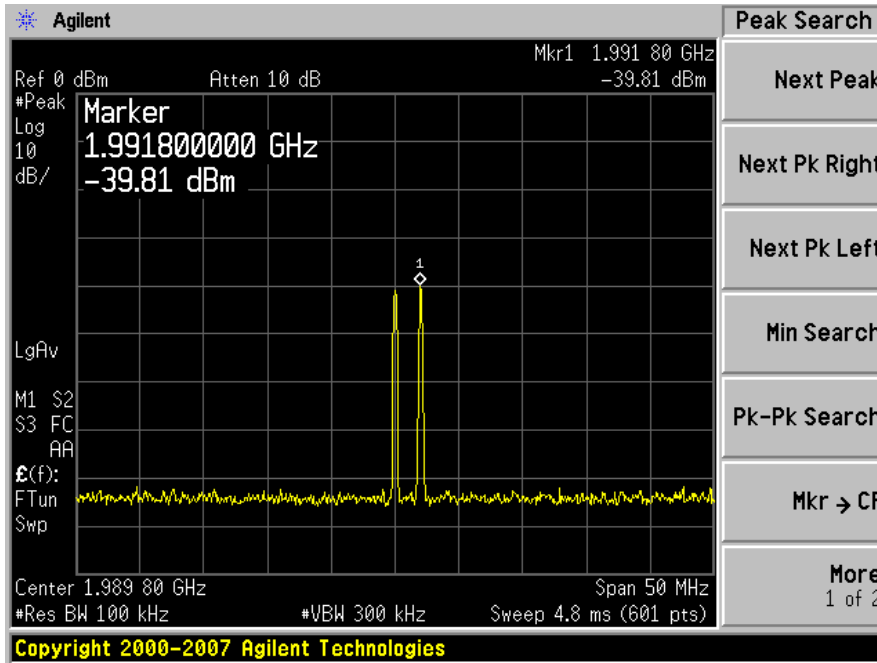


Output

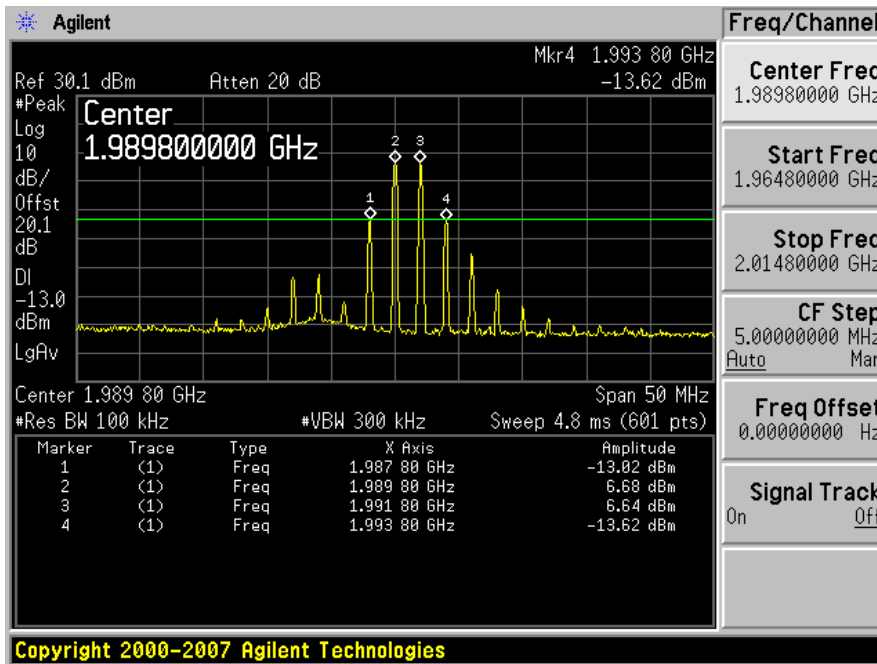


CDMA 850 MHz band Low channel Uplink:

Input

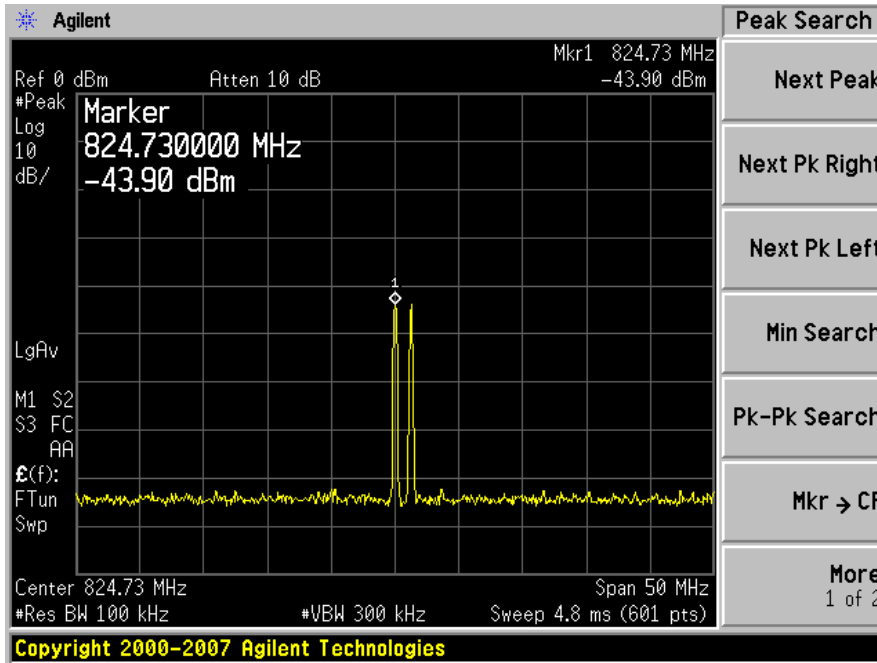


Output

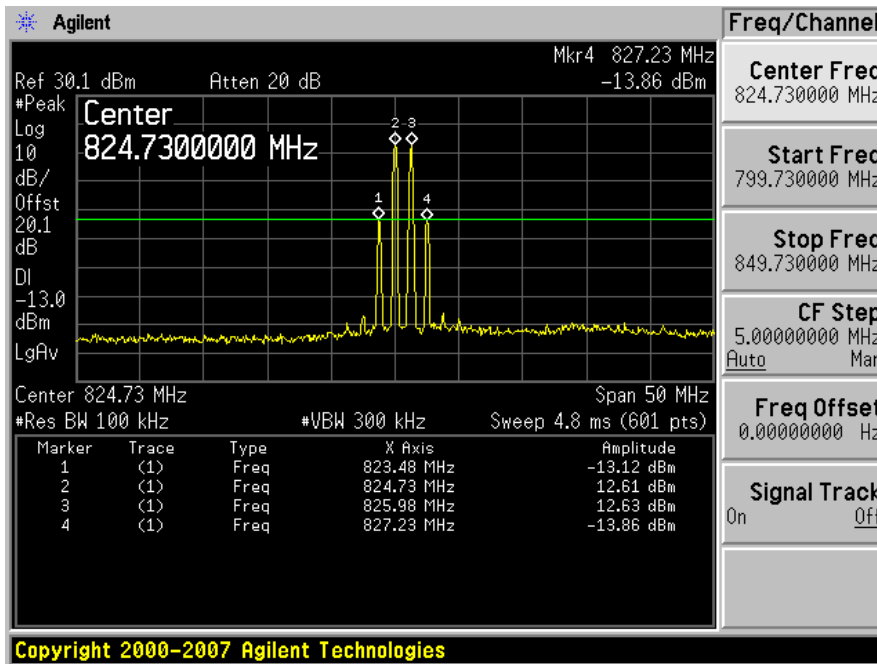


CDMA 850 MHz band High channel Uplink:

Input

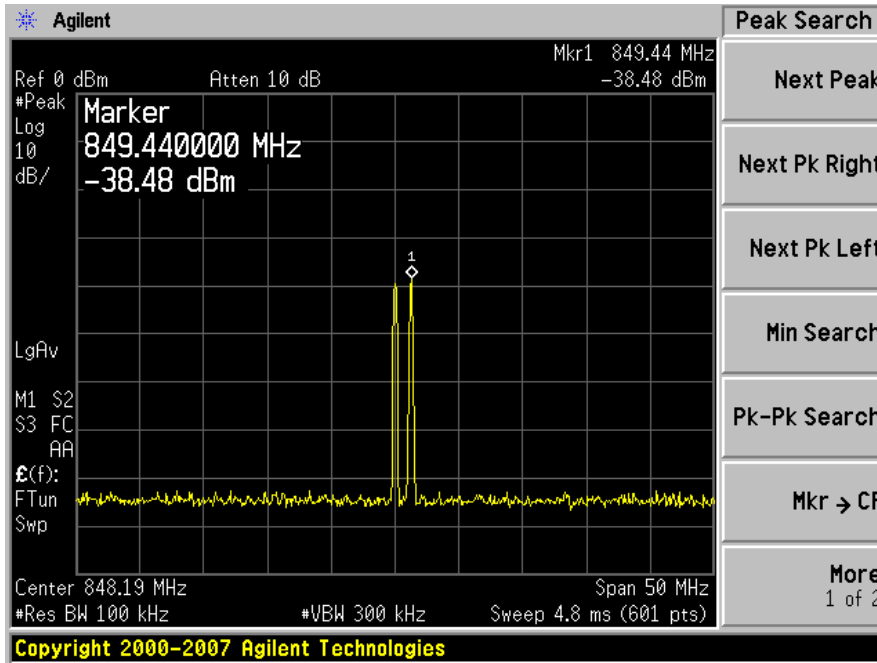


Output

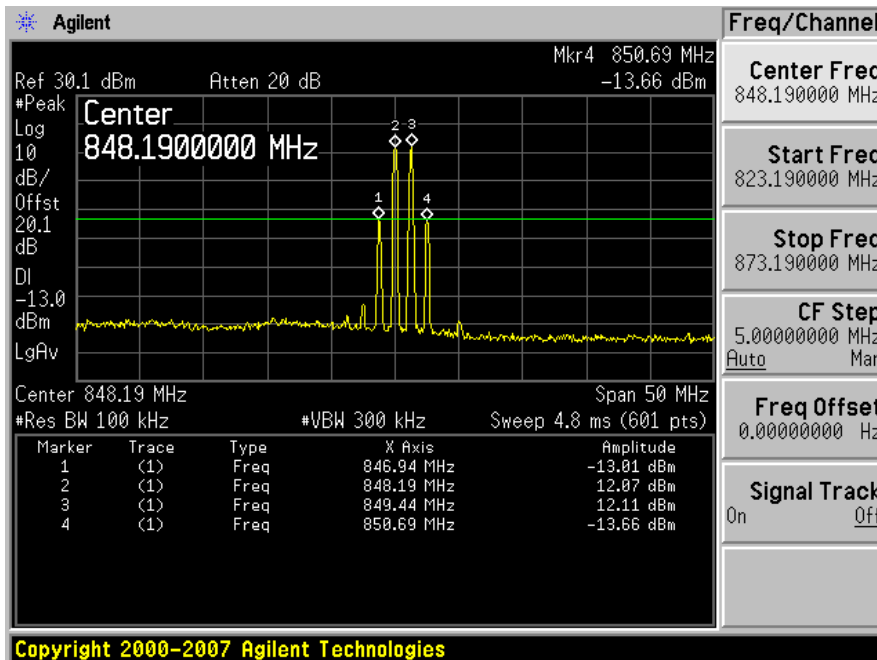


CDMA 1900 MHz band Low channel Uplink:

Input

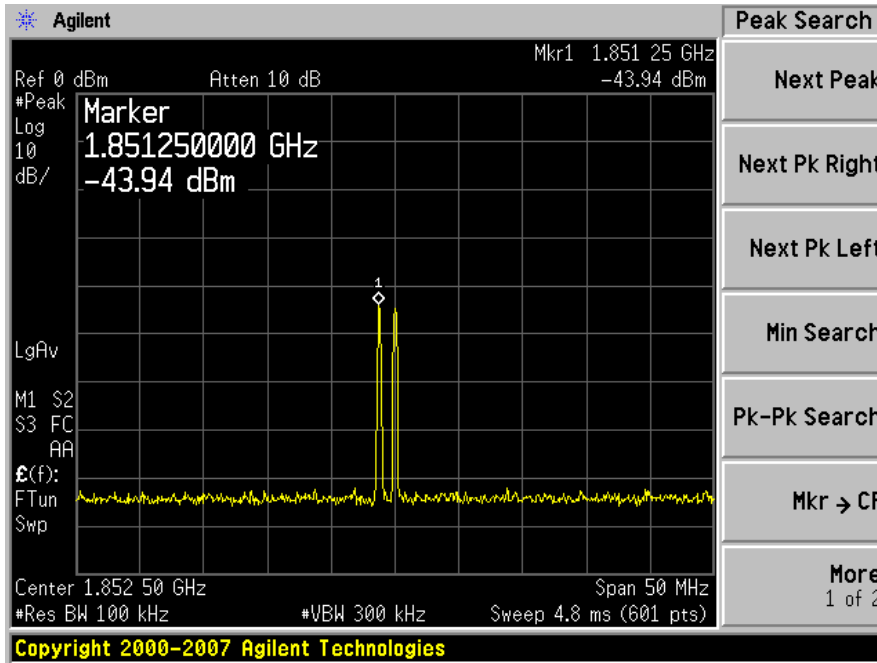


Output

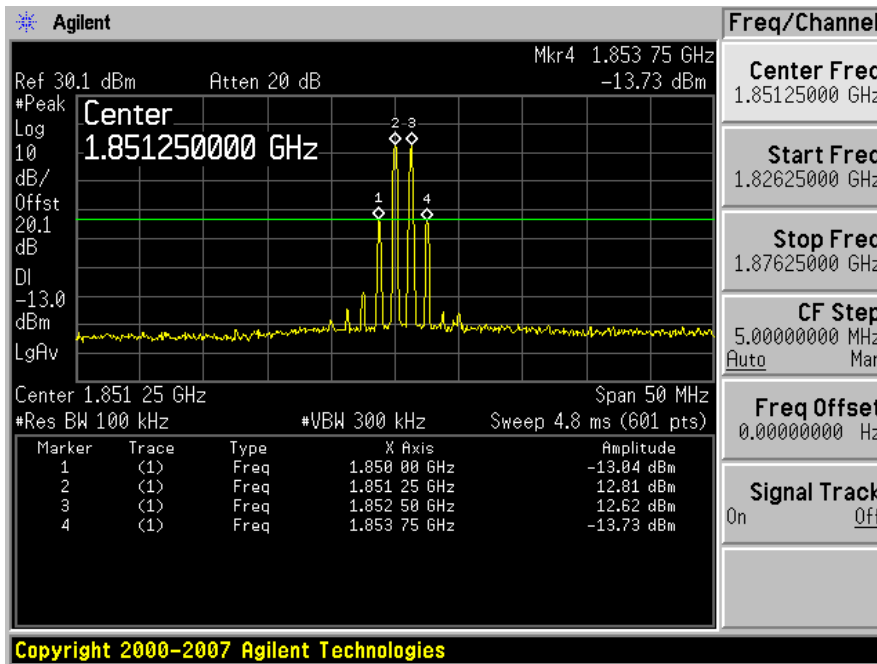


CDMA 1900 MHz band High channel Uplink:

Input

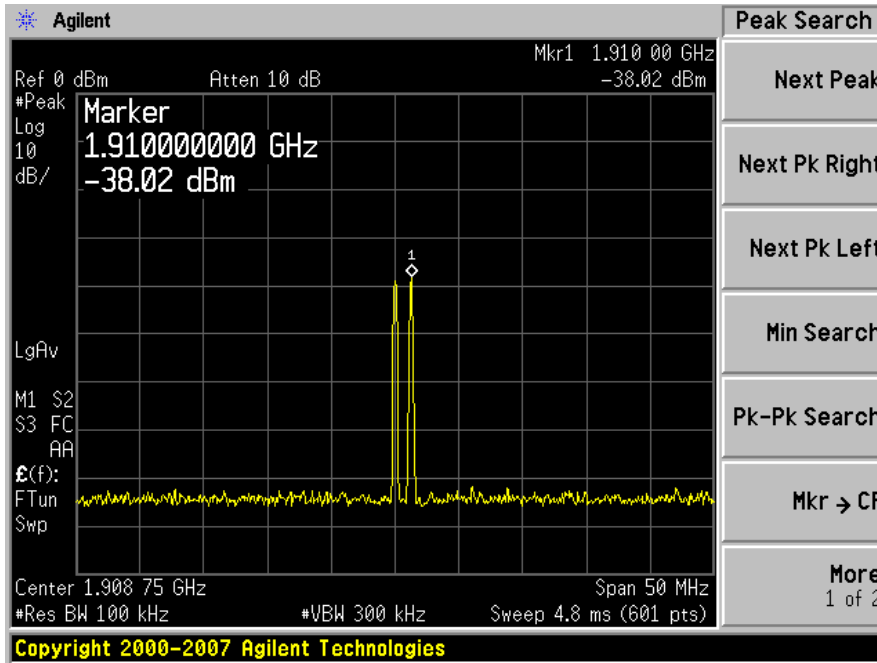


Output

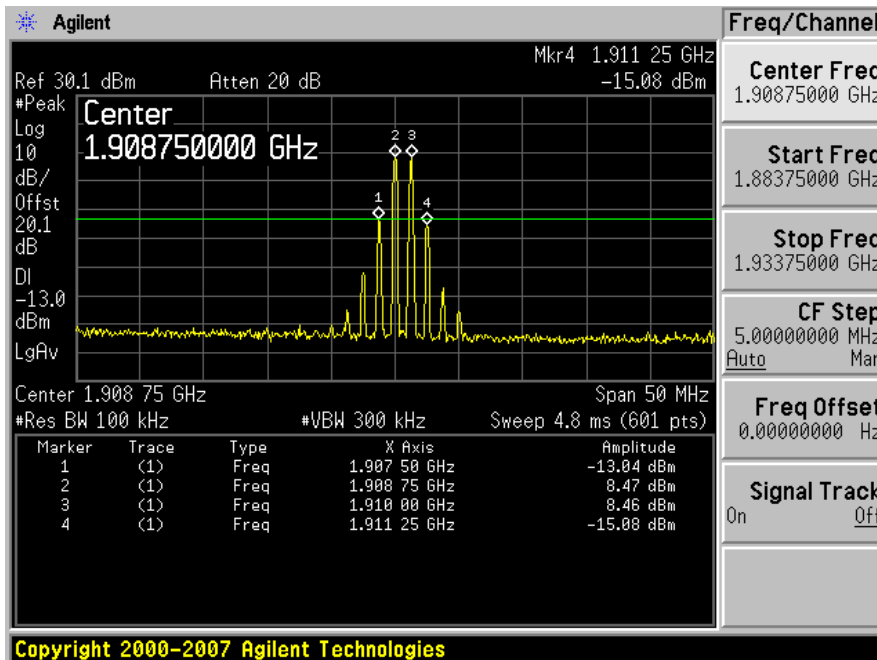


CDMA 850 MHz band Low channel Downlink:

Input

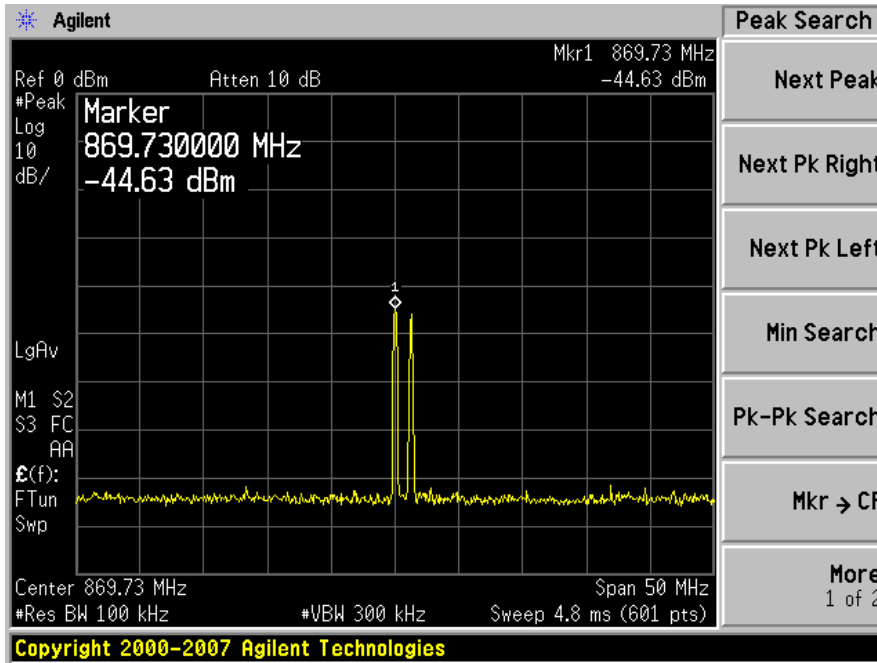


Output

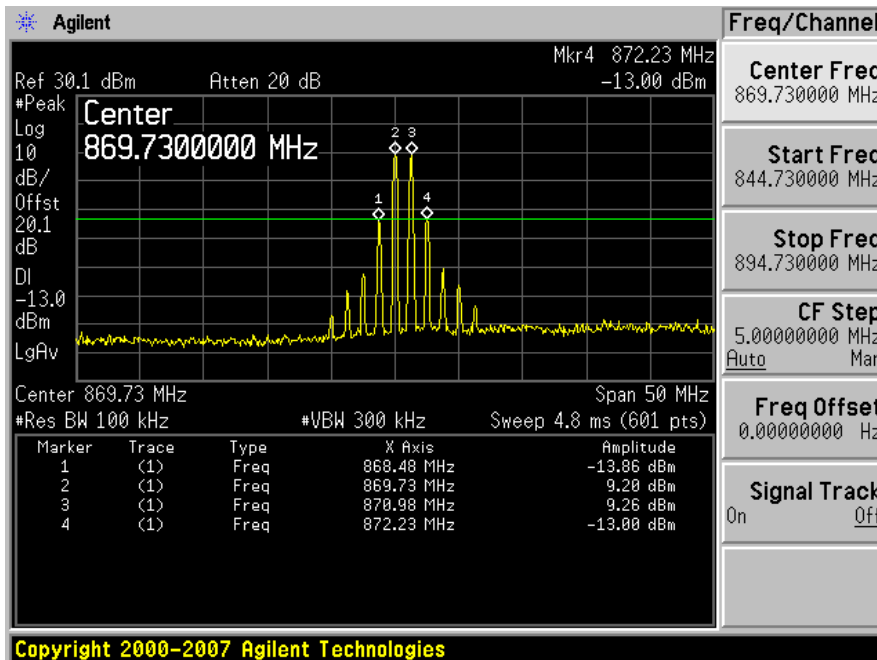


CDMA 850 MHz band High channel Downlink:

Input

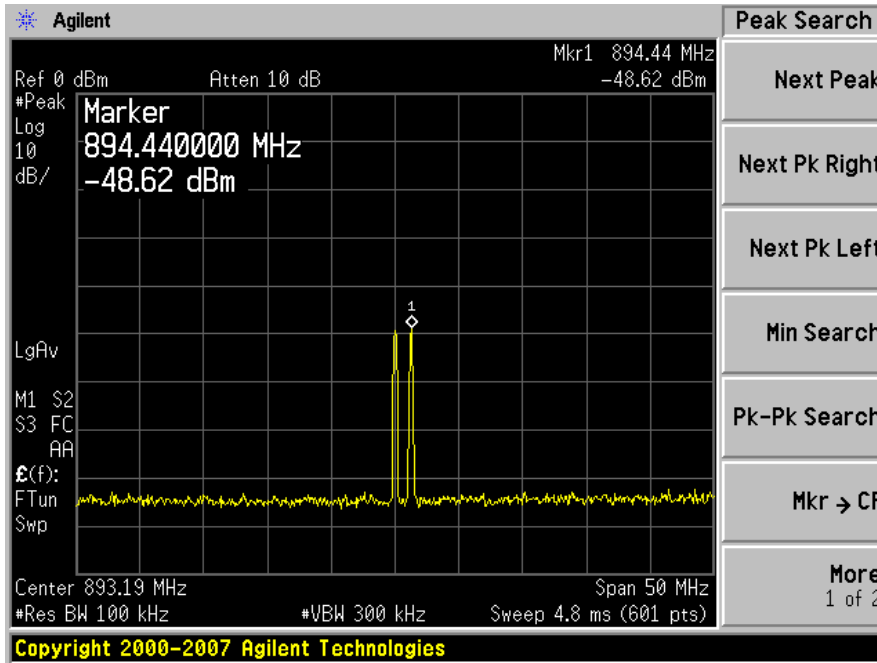


Output

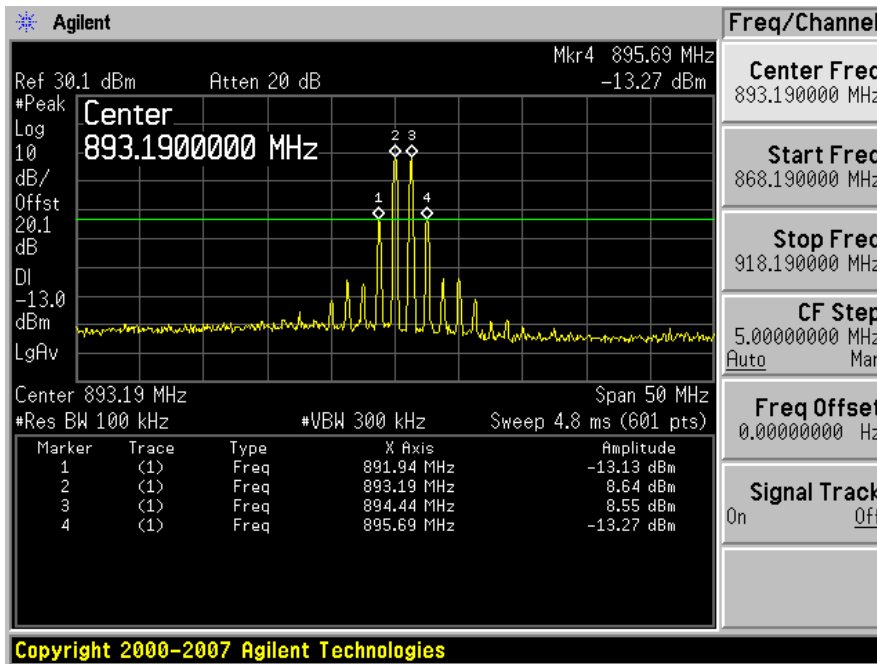


CDMA 1900 MHz band Low channel Downlink:

Input

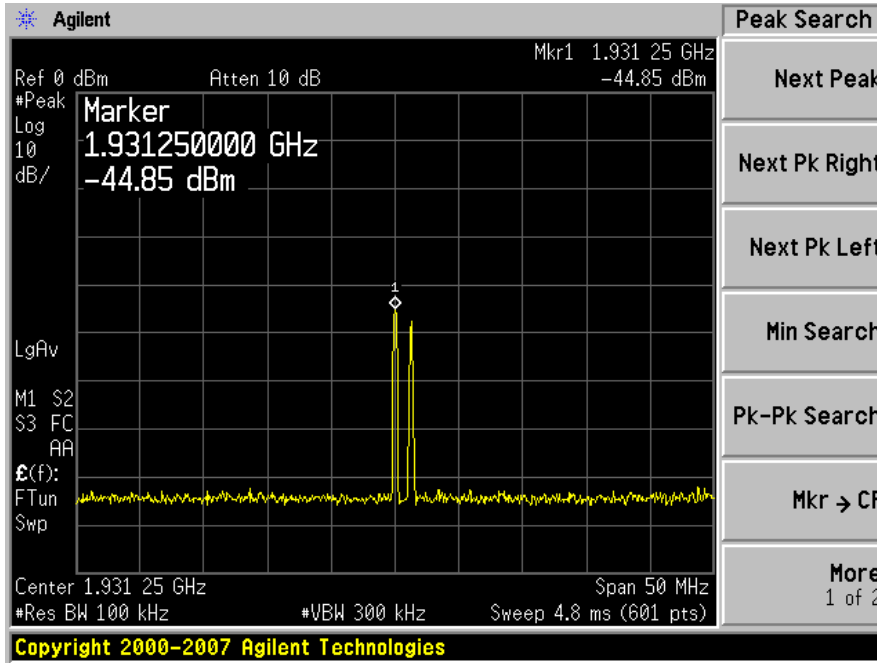


Output

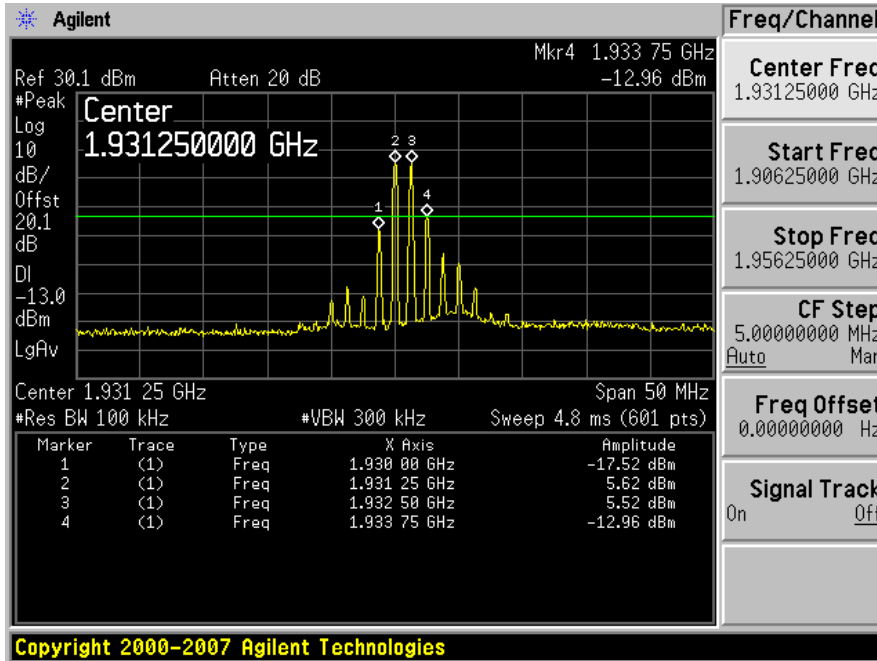


CDMA 1900 MHz band High channel Downlink:


Input

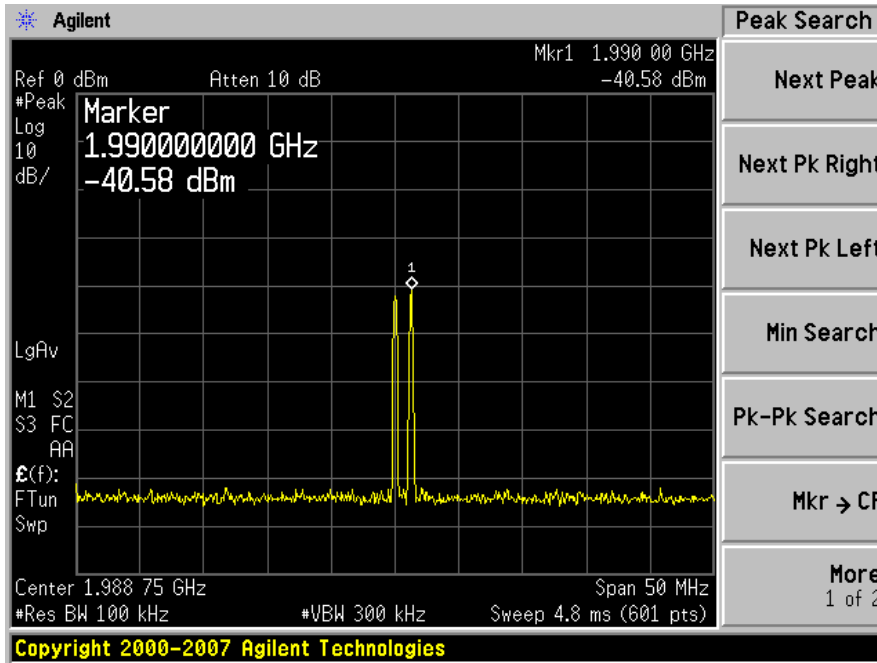


Output

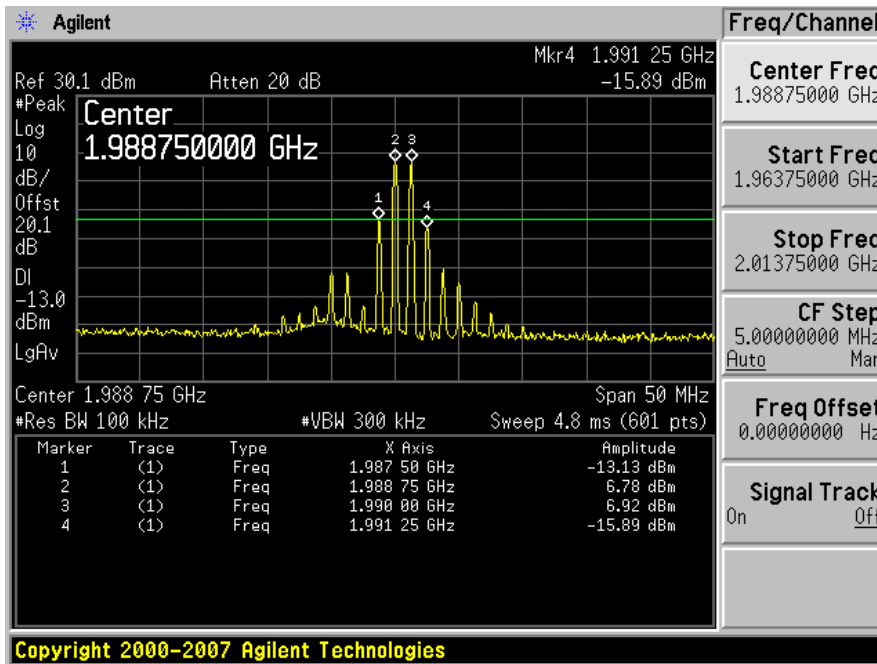

GSM 850 MHz band Uplink: Low Channel (824.2 MHz)

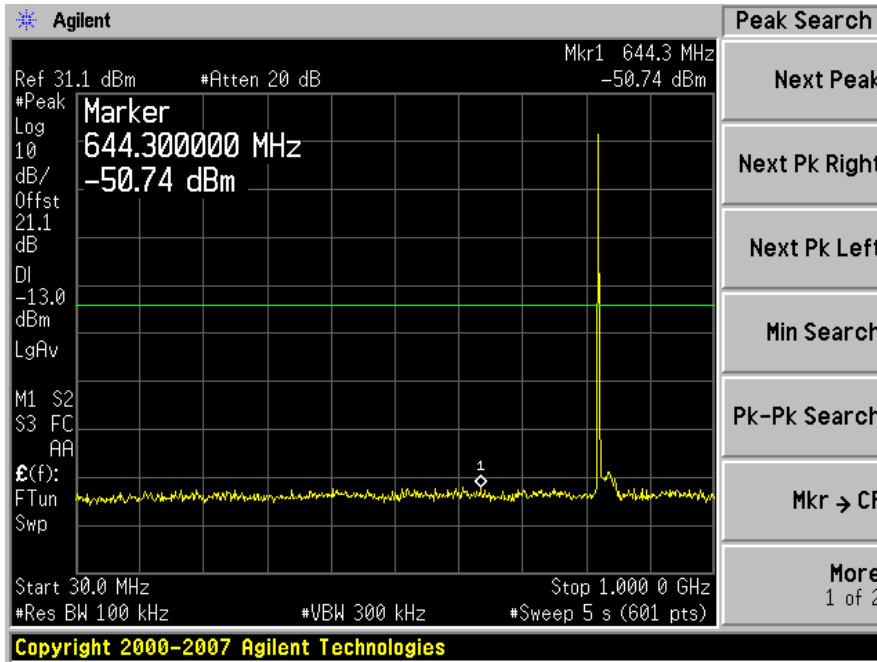


30 MHz to 1 GHz

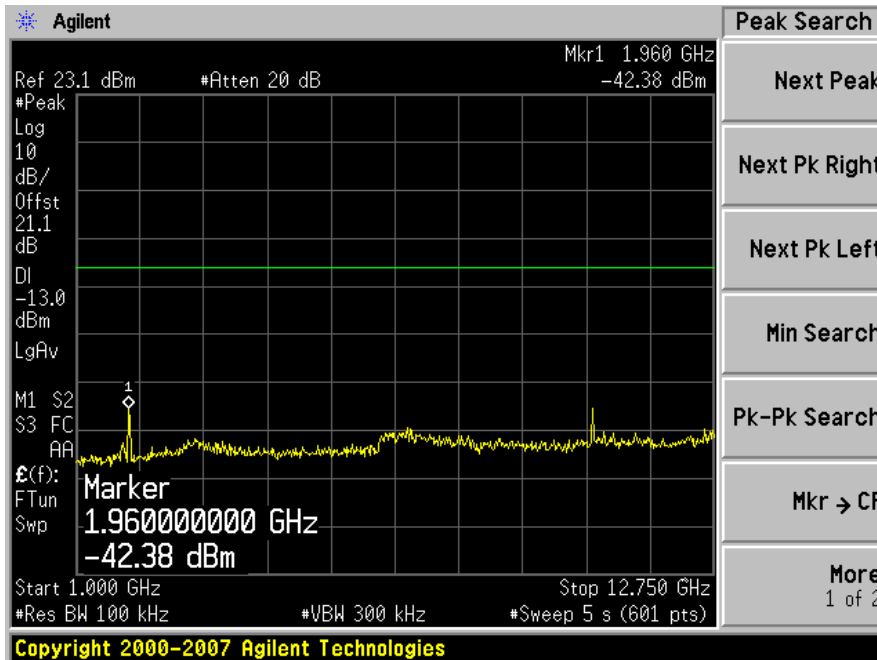


1 GHz to 12.75 GHz

GSM 850 MHz band Uplink: Middle Channel (836.6 MHz)

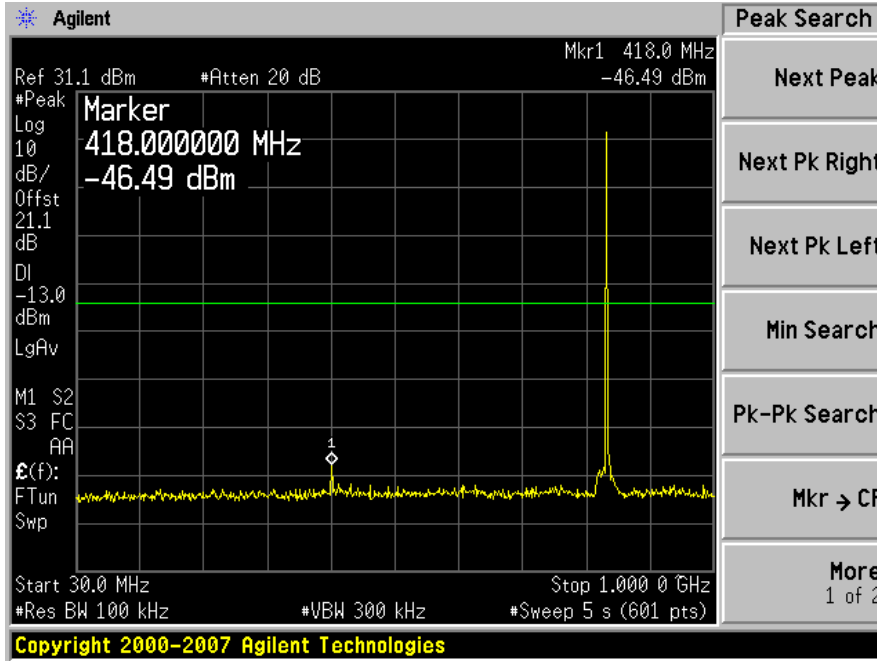


30 MHz to 1 GHz

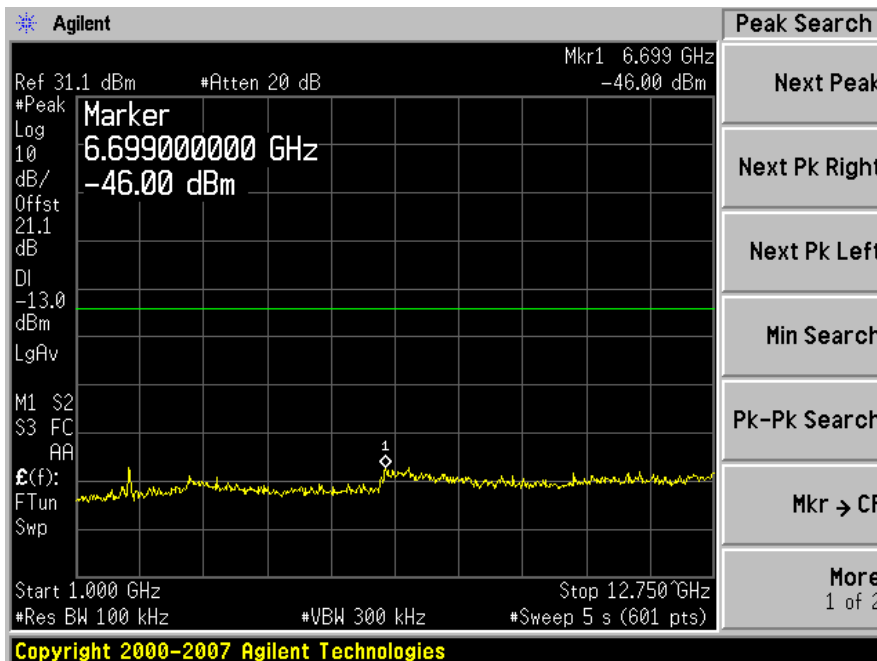


1 GHz to 12.75 GHz

GSM 850 MHz band Uplink: High Channel (848.8 MHz)

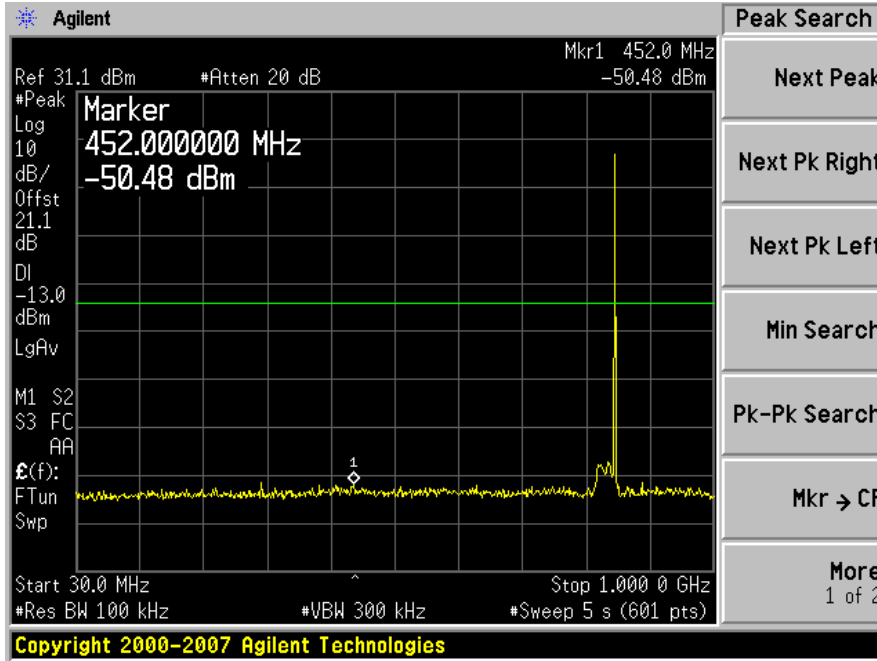


30 MHz to 1 GHz

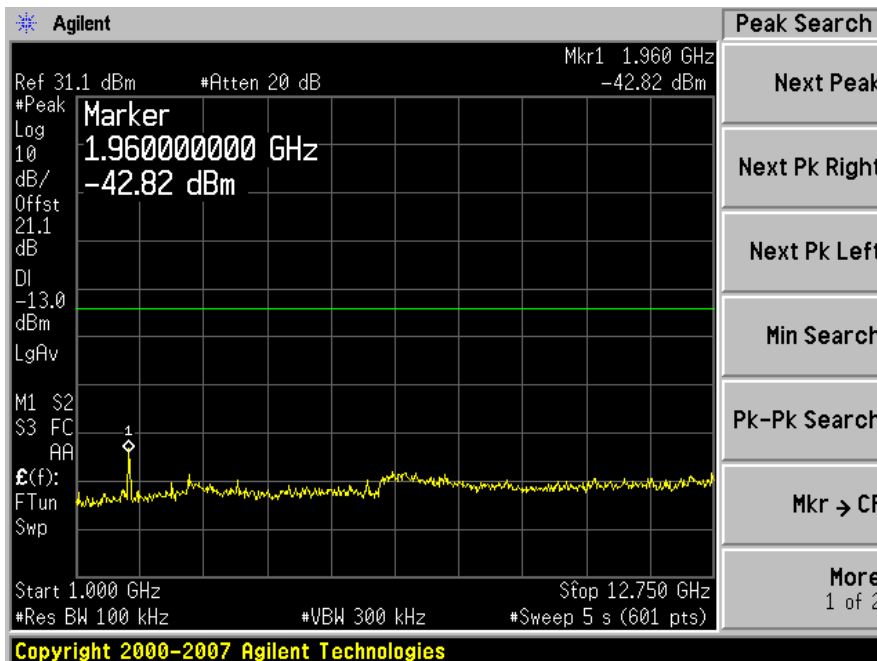


1 GHz to 12.75 GHz

GSM 850 MHz band Downlink: Low Channel (869.2 MHz)

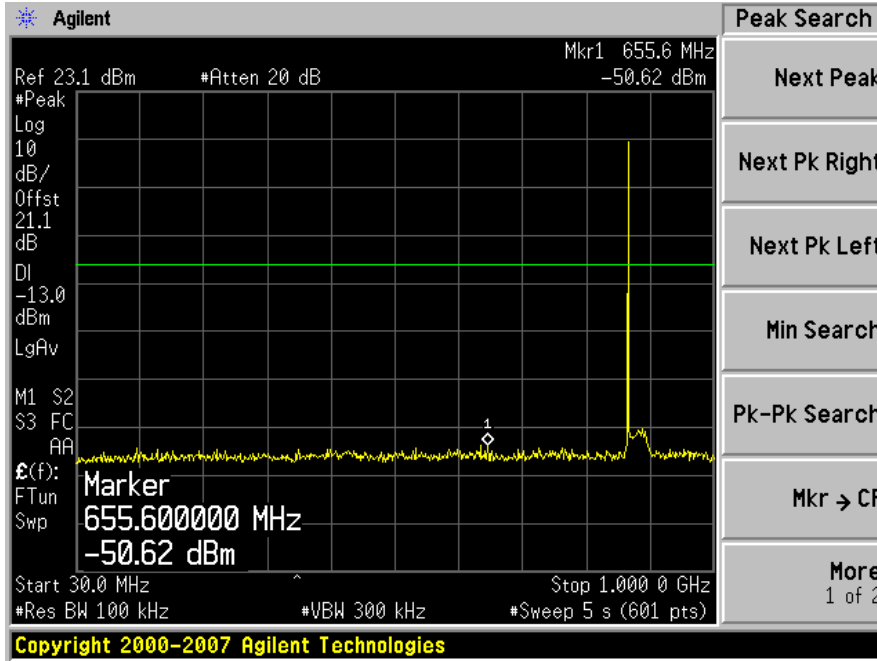


30 MHz to 1 GHz

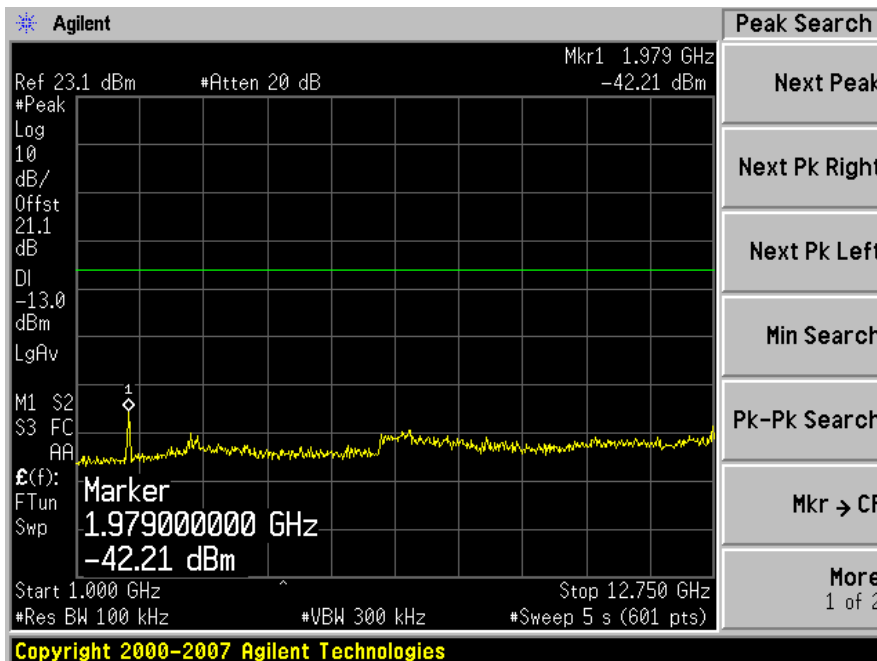


1 GHz to 12.75 GHz

GSM 850 MHz band Downlink: Middle Channel (881.6 MHz)

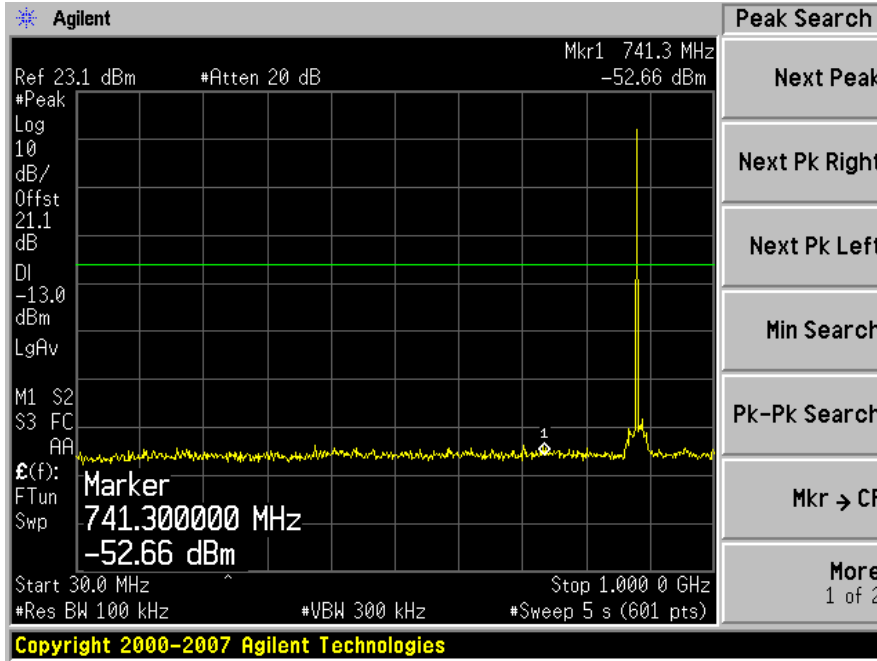


30 MHz to 1 GHz

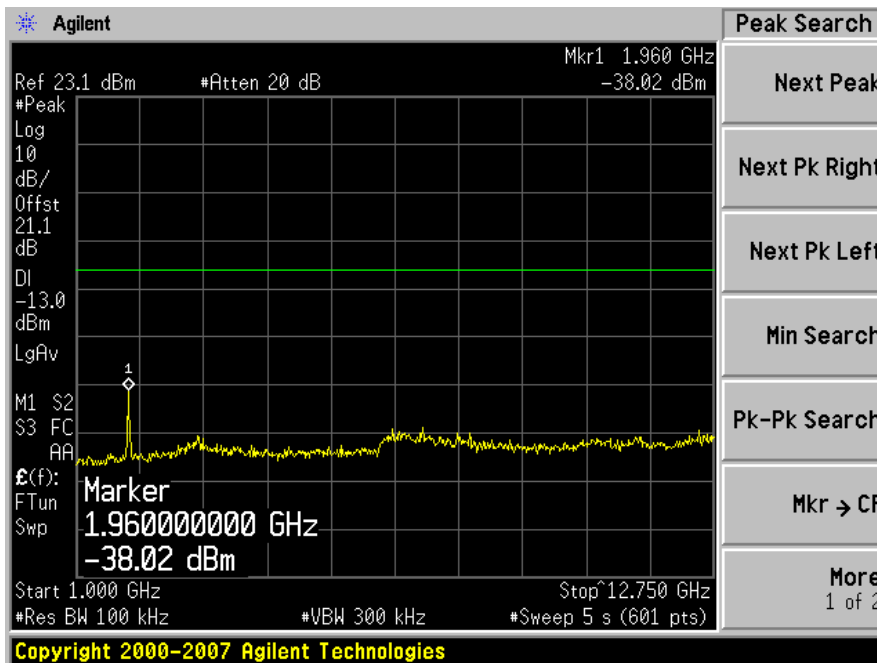


1 GHz to 12.75 GHz

GSM 850 MHz band Downlink: High Channel (893.8 MHz)

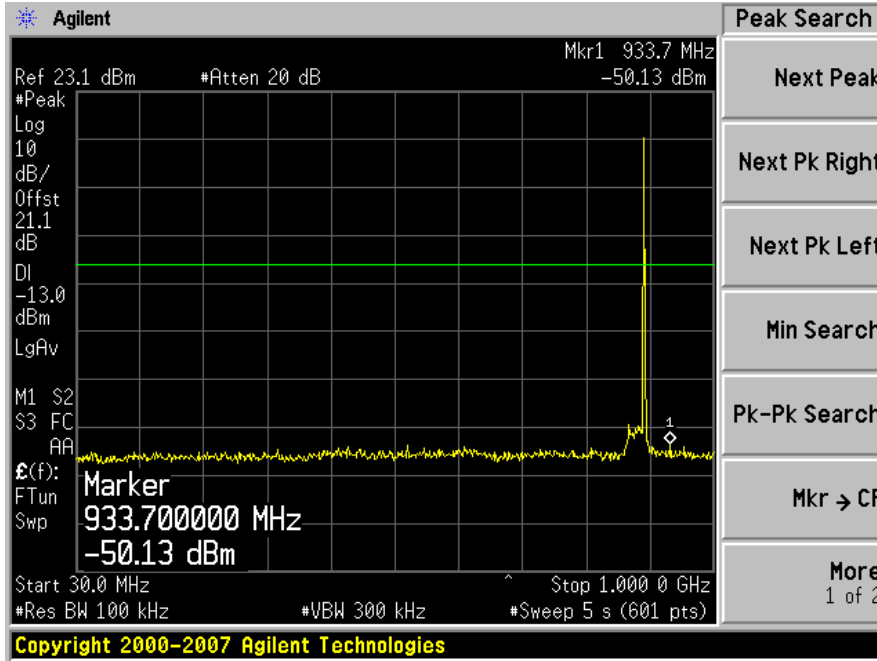


30 MHz to 1 GHz

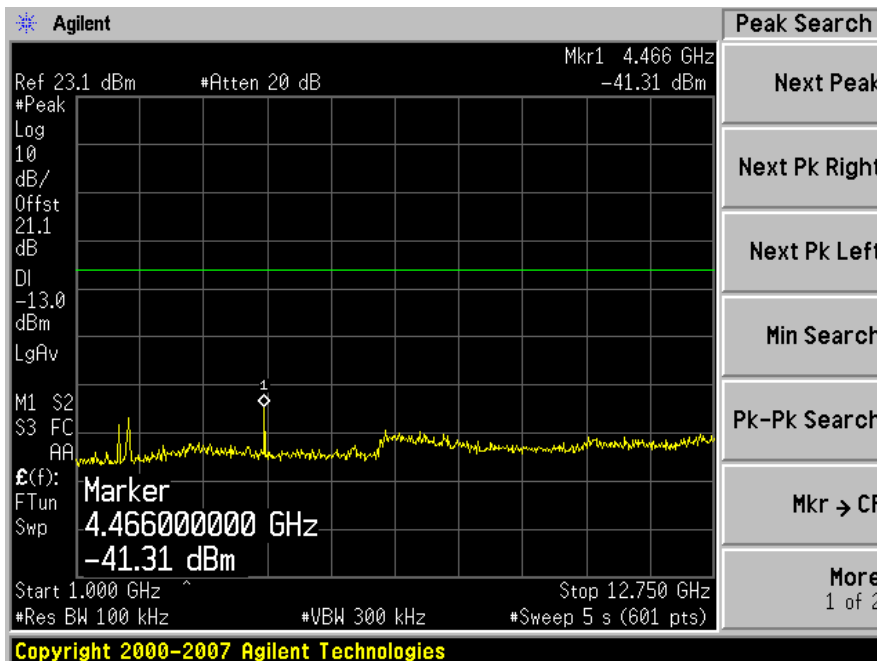


1 GHz to 12.75 GHz


GSM 1900 MHz band Uplink: Low Channel (1850.2 MHz)

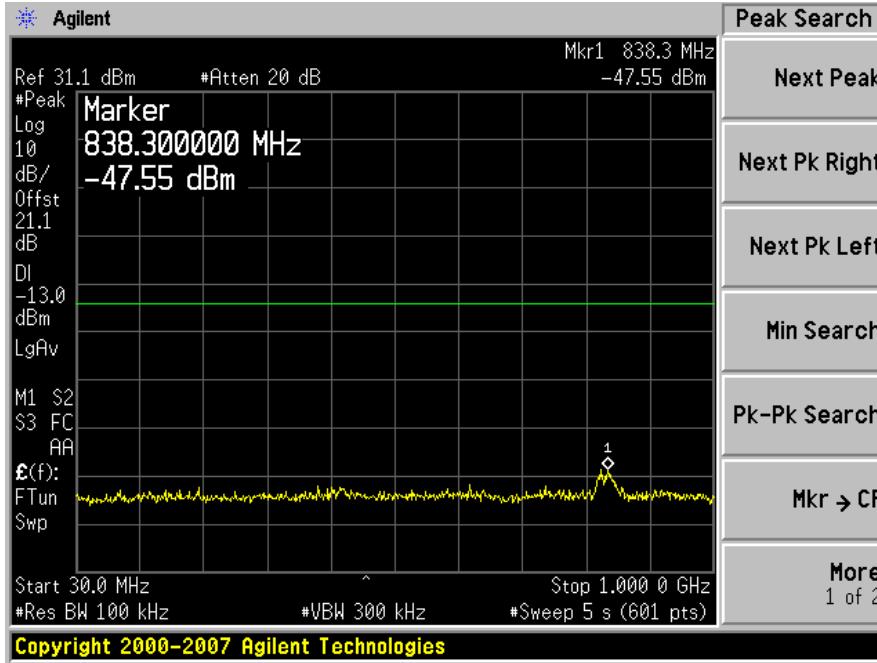

30 MHz to 1 GHz

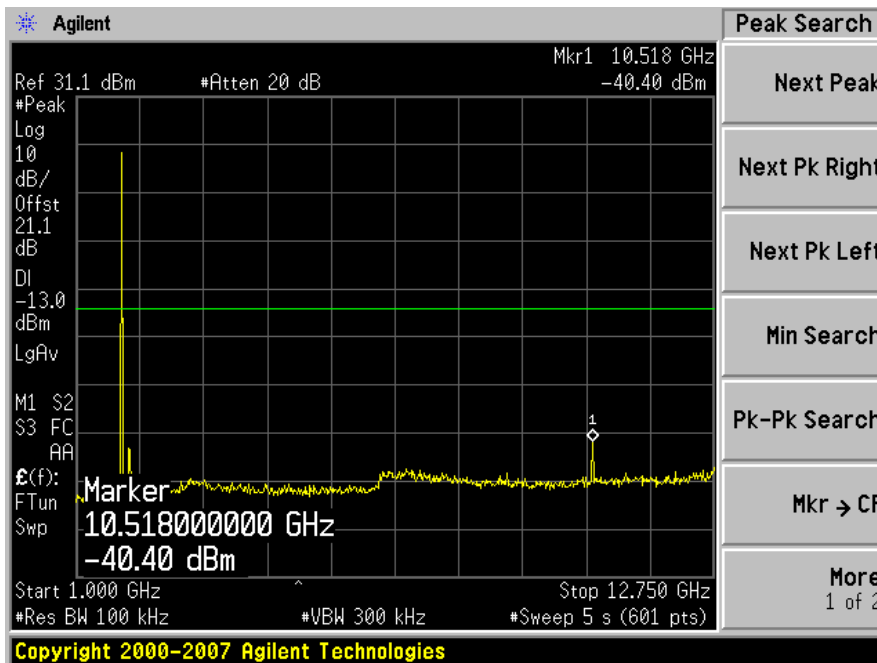


1 GHz to 12.75 GHz

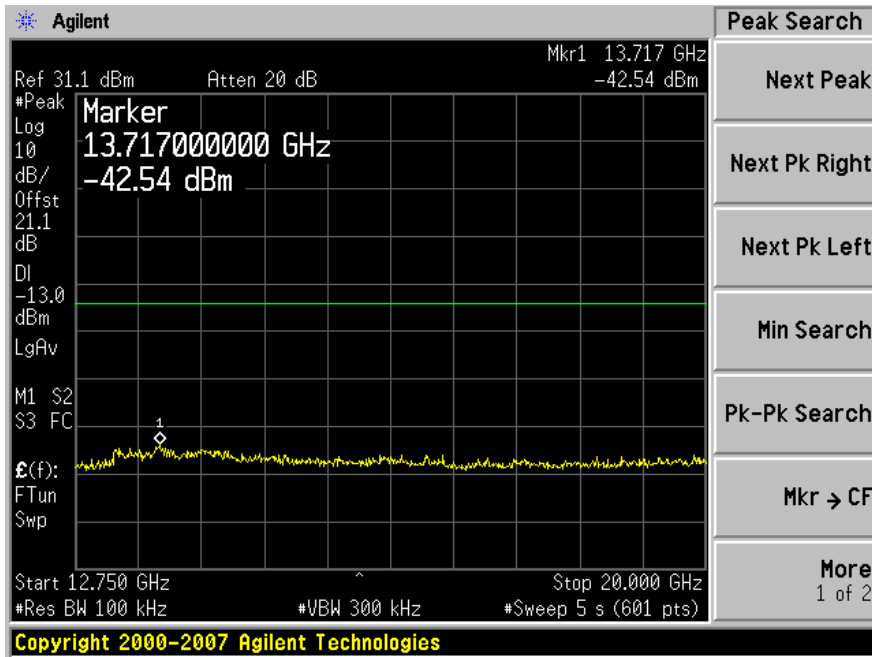


12.75 GHz to 20 GHz


GSM 1900 MHz band Uplink: Middle Channel (1880 MHz)

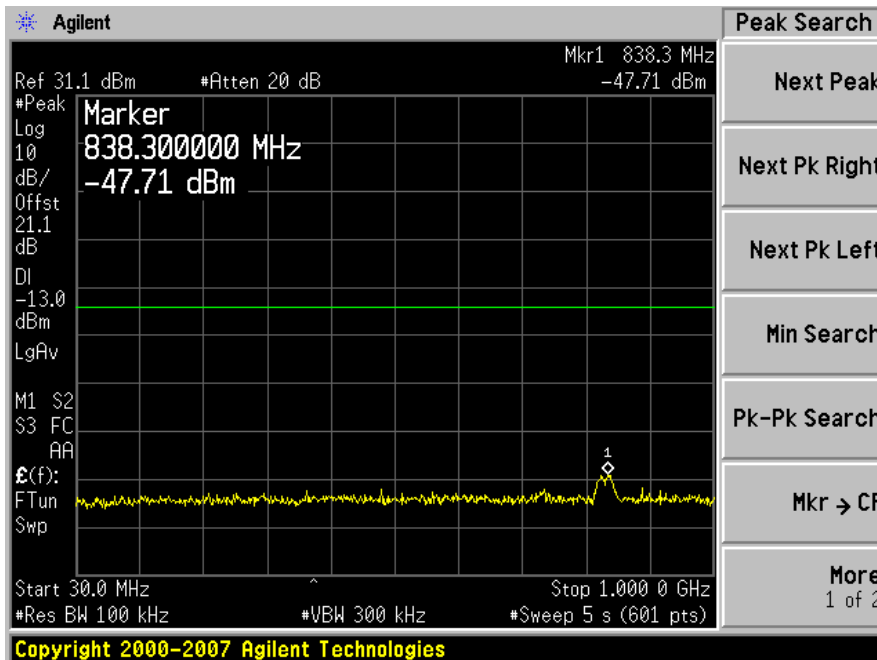

30 MHz to 1 GHz

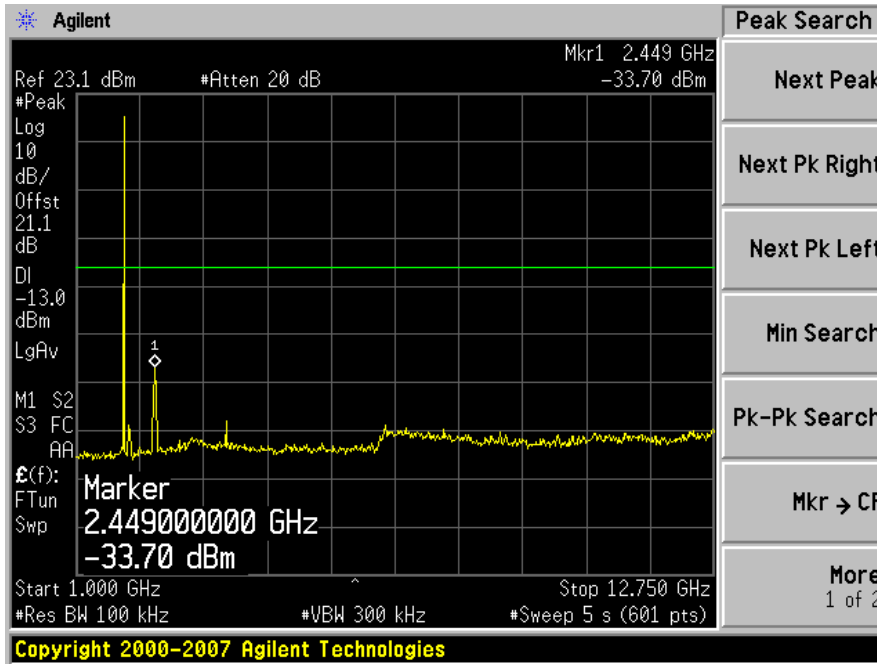


1 GHz to 12.75 GHz

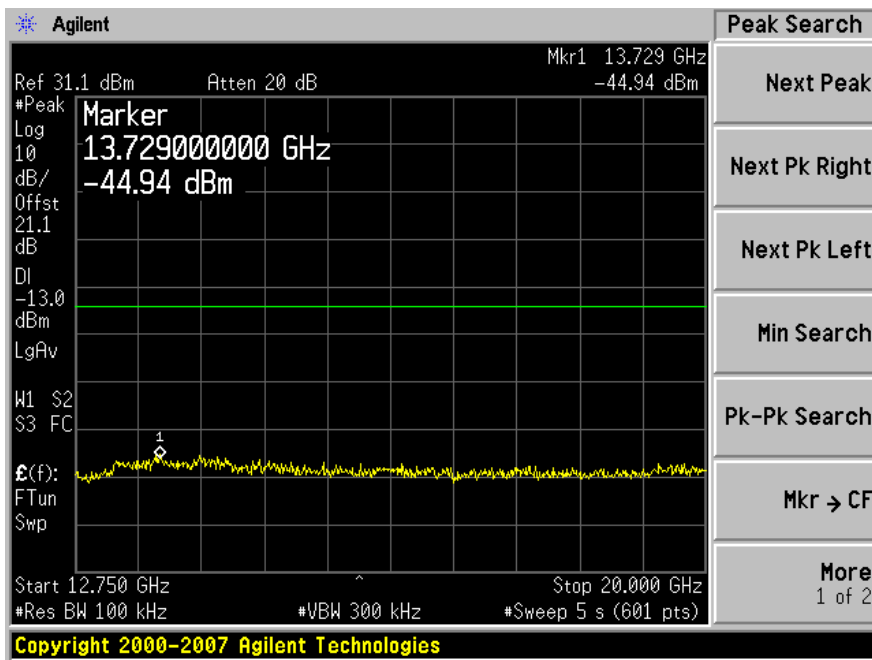


12.75 GHz to 20 GHz


GSM 1900 MHz band Uplink: High Channel (1909.8 MHz)

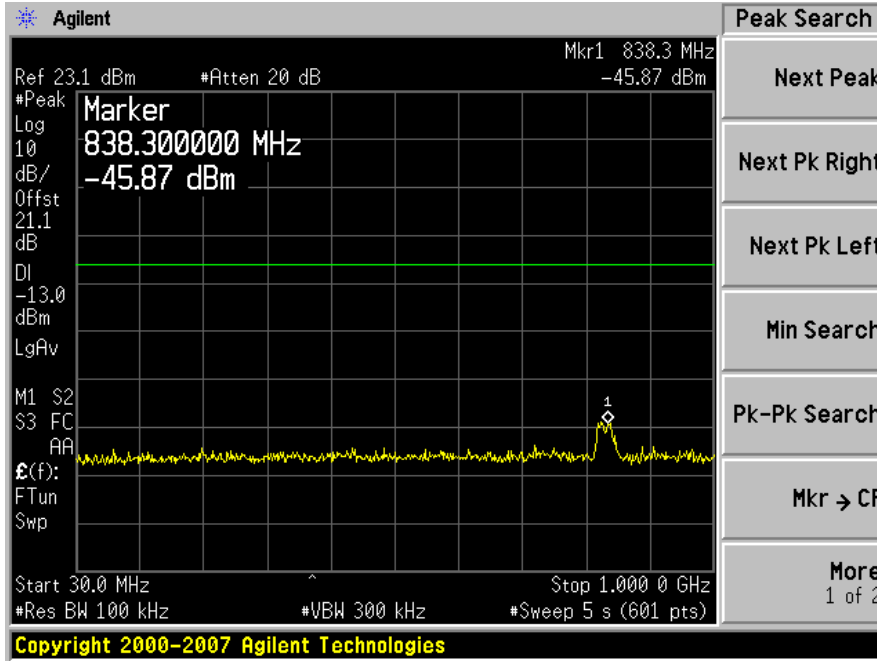

30 MHz to 1 GHz

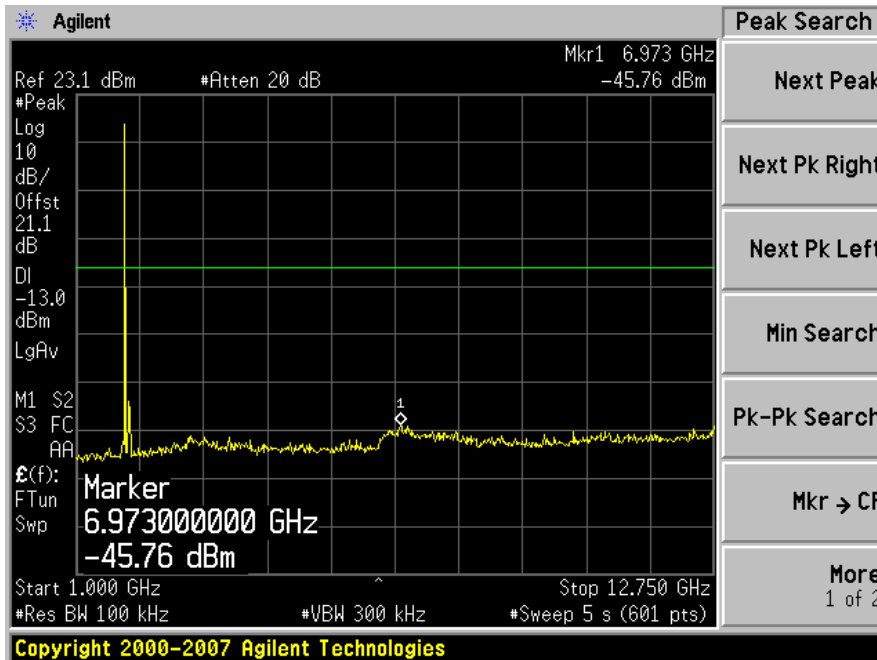


1 GHz to 12.75 GHz

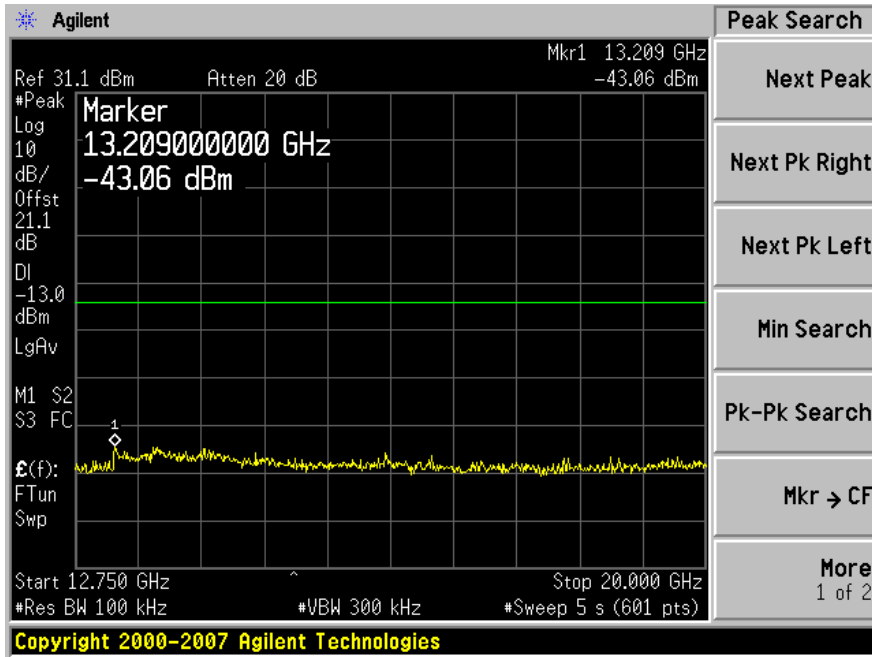


12.75 GHz to 20 GHz


GSM 1900 MHz band Downlink: Low Channel (1930.2 MHz)

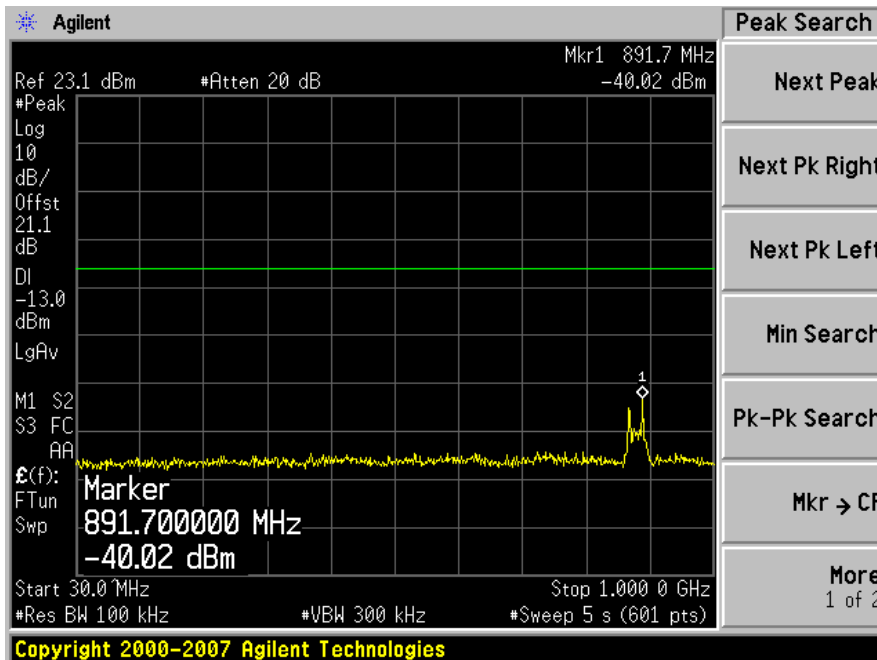

30 MHz to 1 GHz

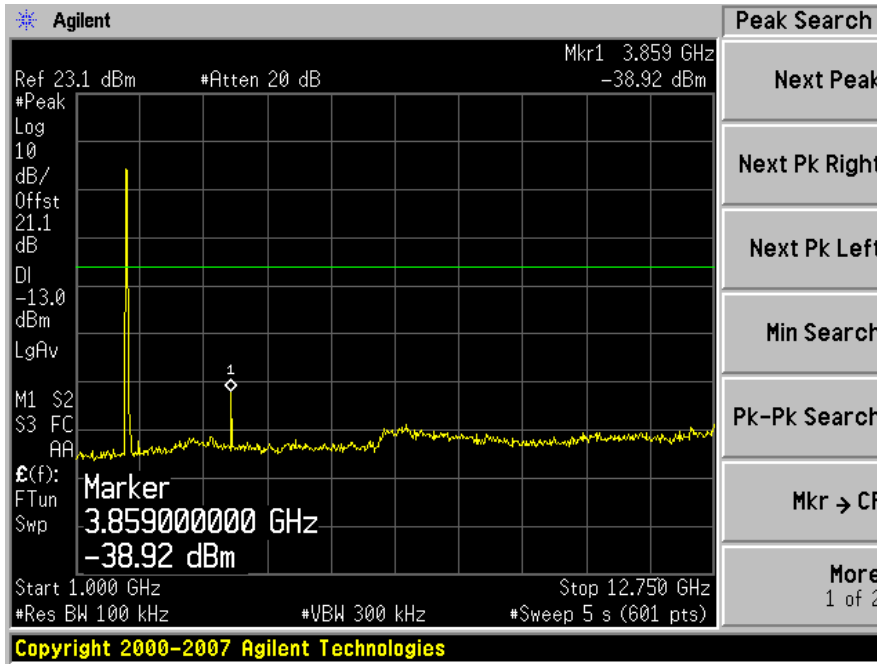


1 GHz to 12.75 GHz

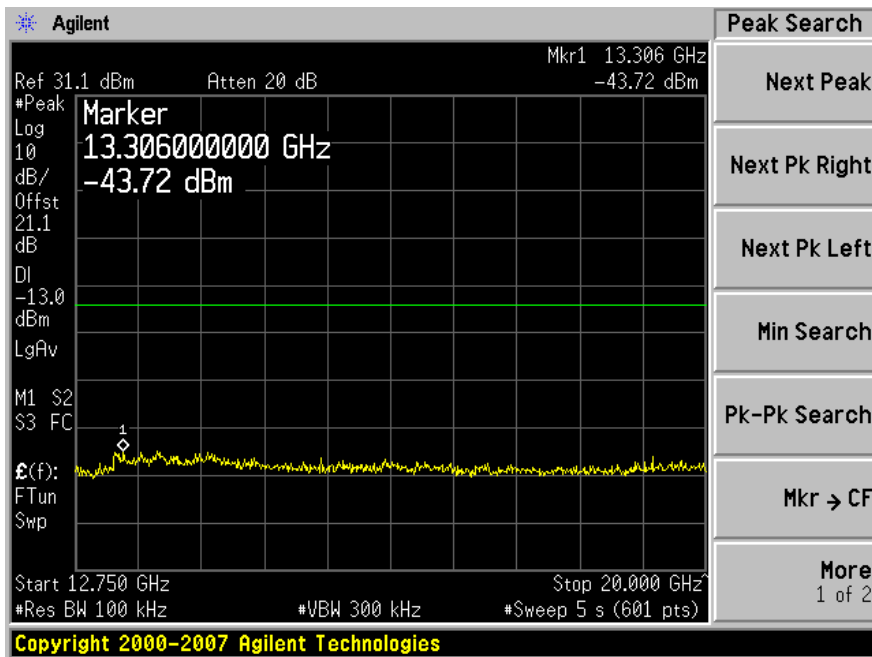


12.75 GHz to 20 GHz


GSM 1900 MHz band Downlink: Middle Channel (1960 MHz)

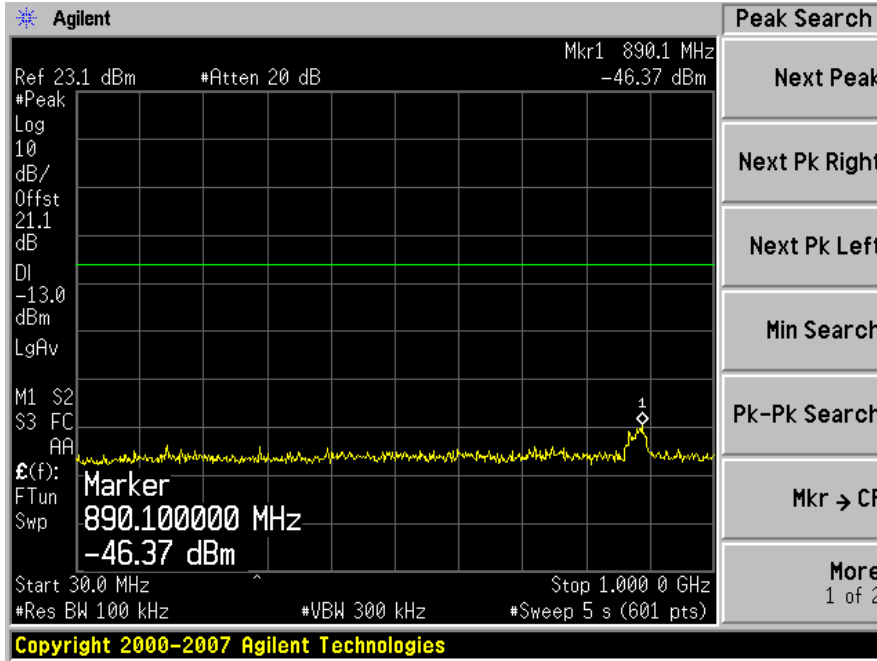

30 MHz to 1 GHz

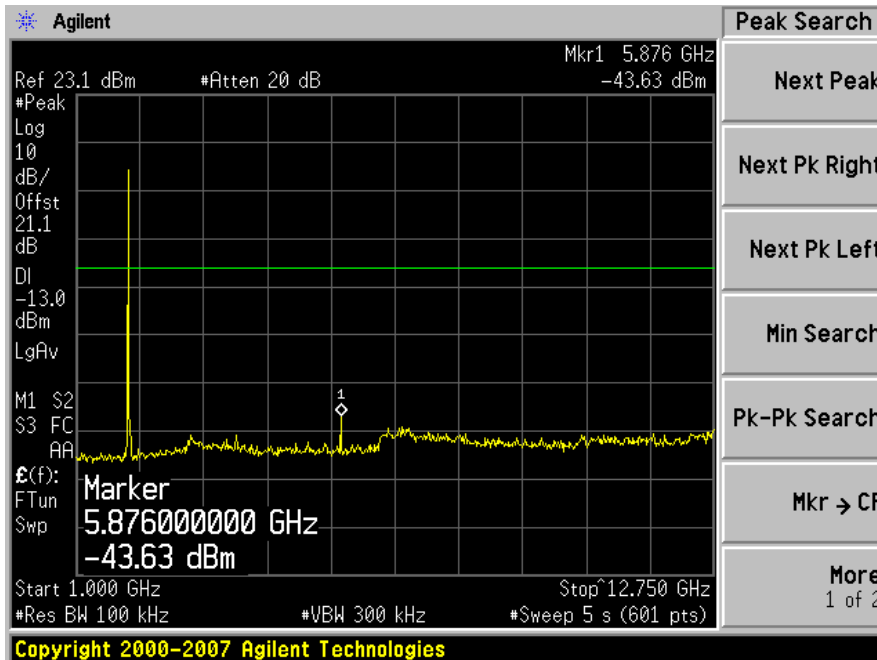


1 GHz to 12.75 GHz

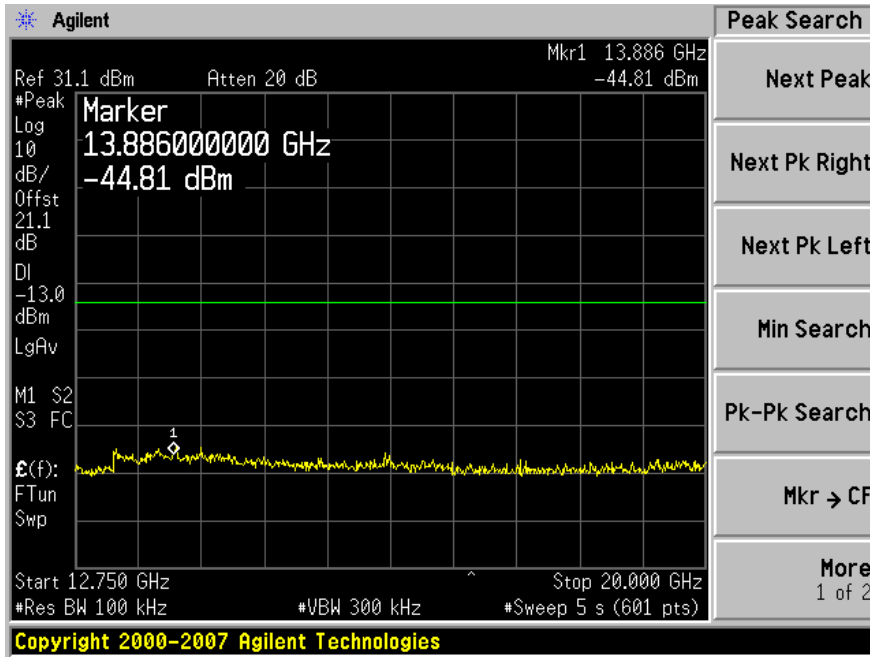


12.75 GHz to 20 GHz


GSM 1900 MHz band Downlink: High Channel (1989.8 MHz)

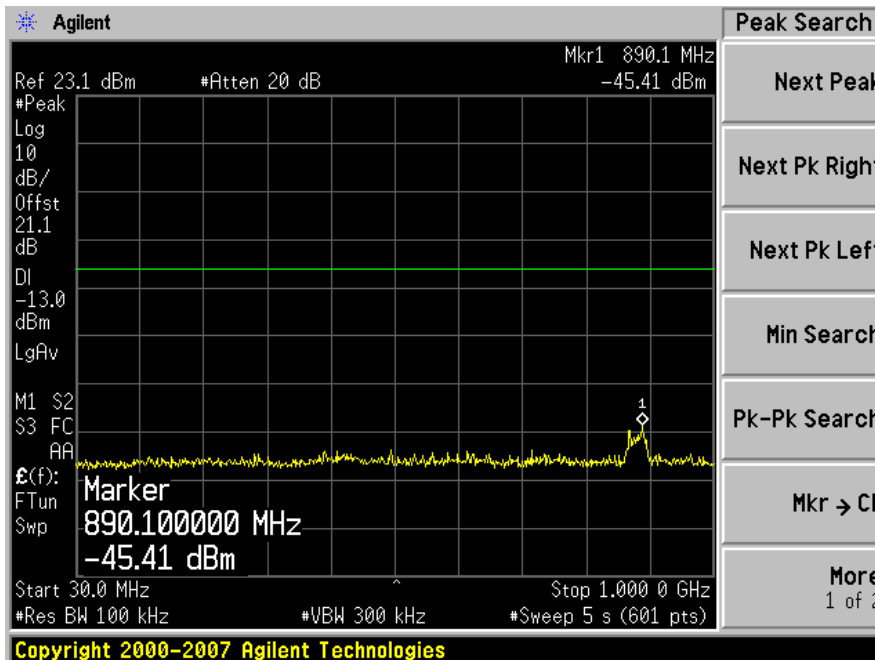

30 MHz to 1 GHz

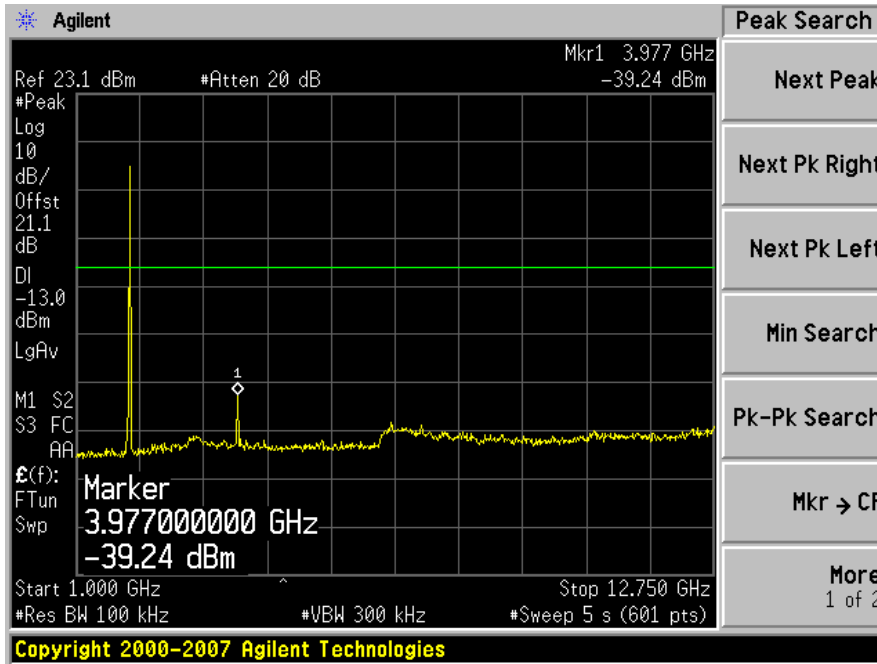


1 GHz to 12.75 GHz

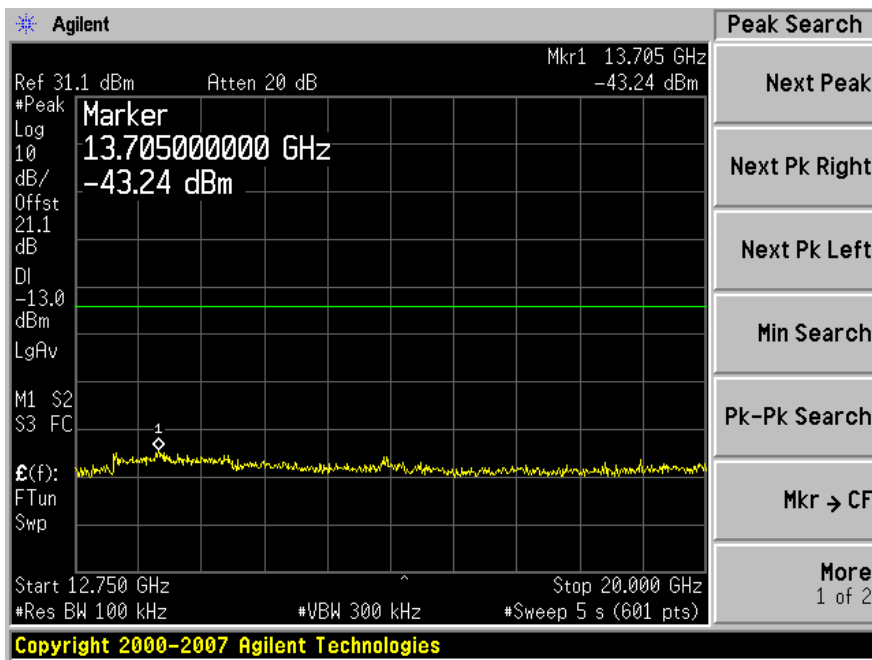


12.75 GHz to 20 GHz

CDMA 850 MHz band Uplink: Low Channel (824.73 MHz)

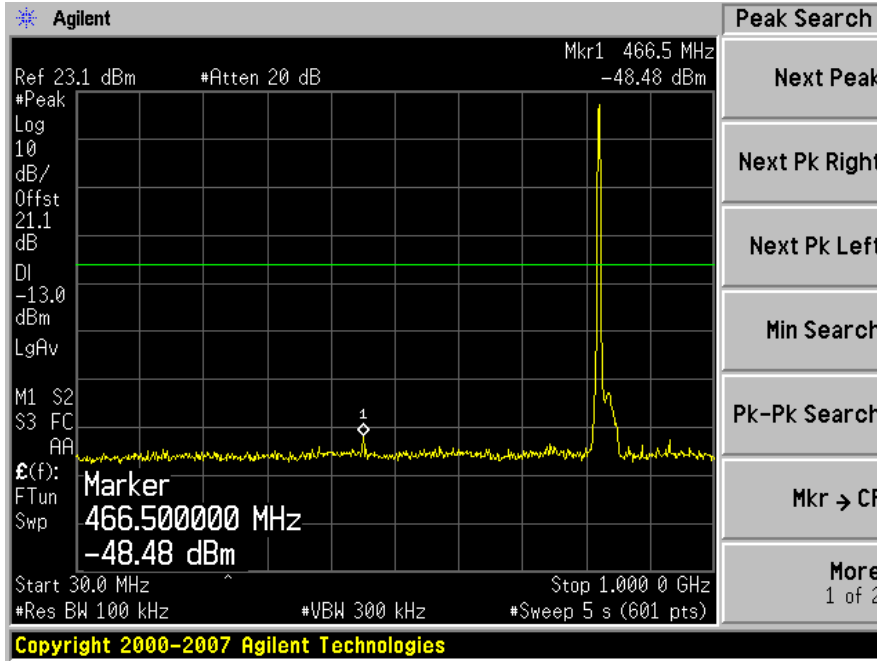


30 MHz to 1 GHz

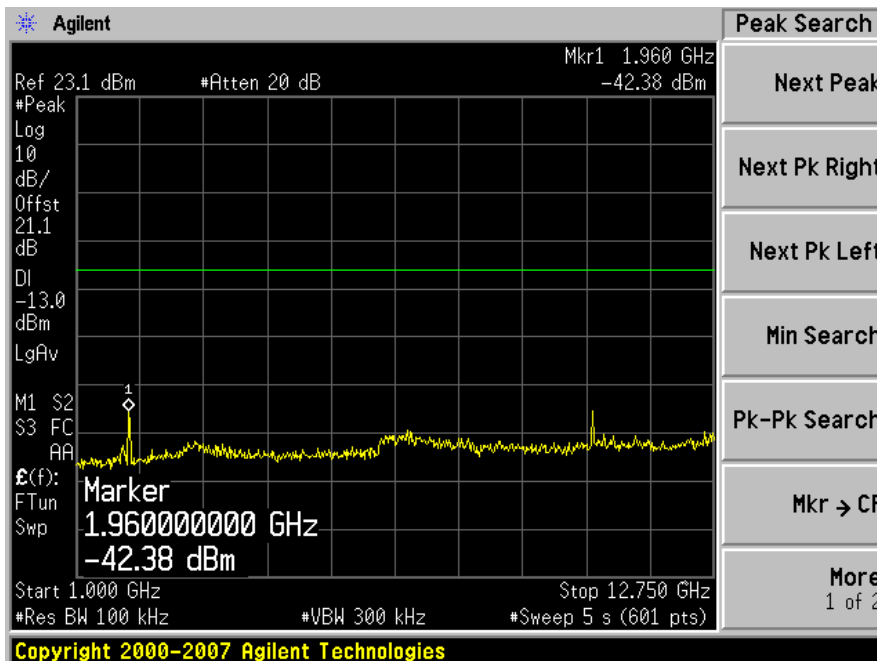


1 GHz to 12.75 GHz

CDMA 850 MHz band Uplink: Middle Channel (836.4 MHz)

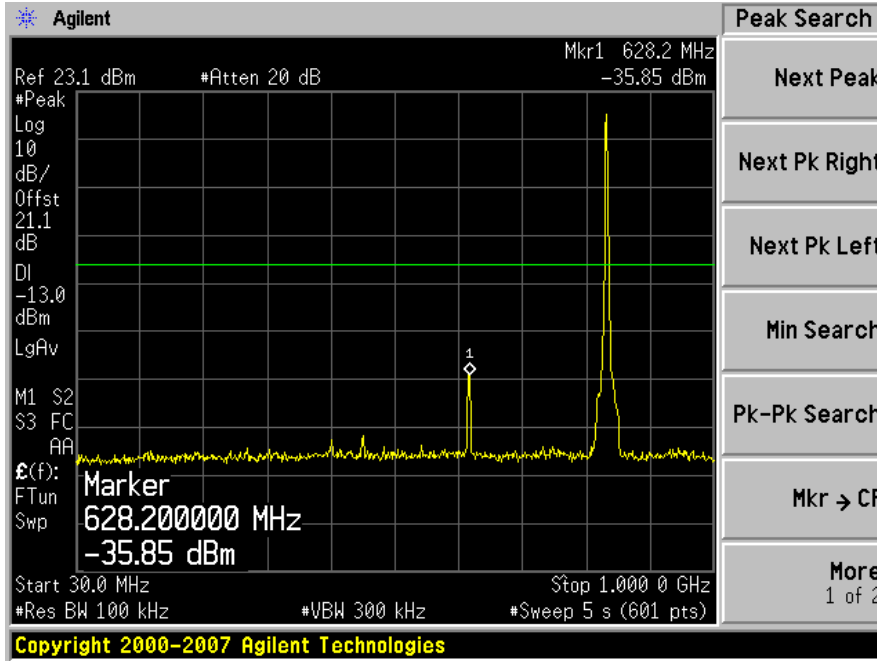


30 MHz to 1 GHz

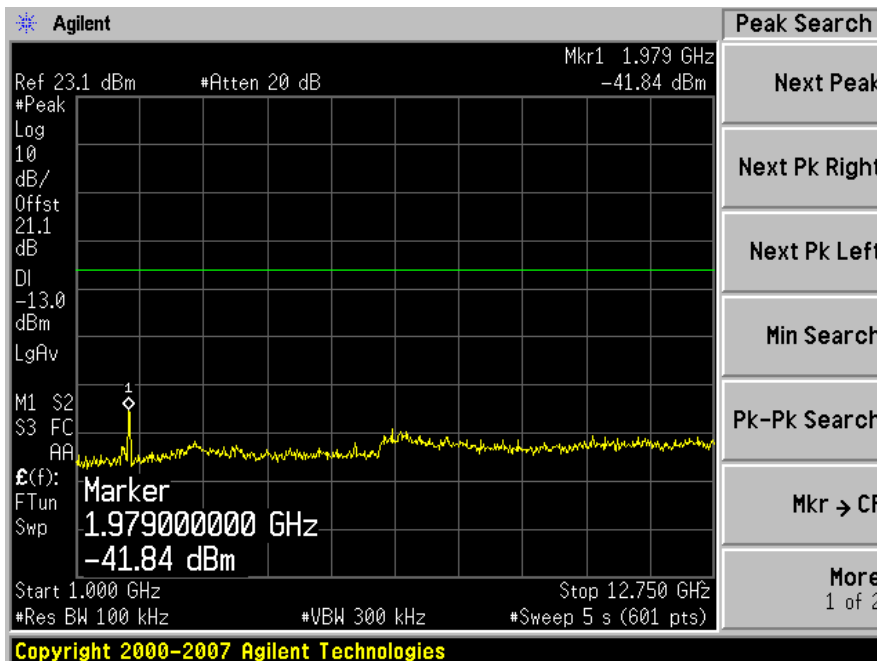


1 GHz to 12.75 GHz

CDMA 850 MHz band Uplink: High Channel (848.19 MHz)

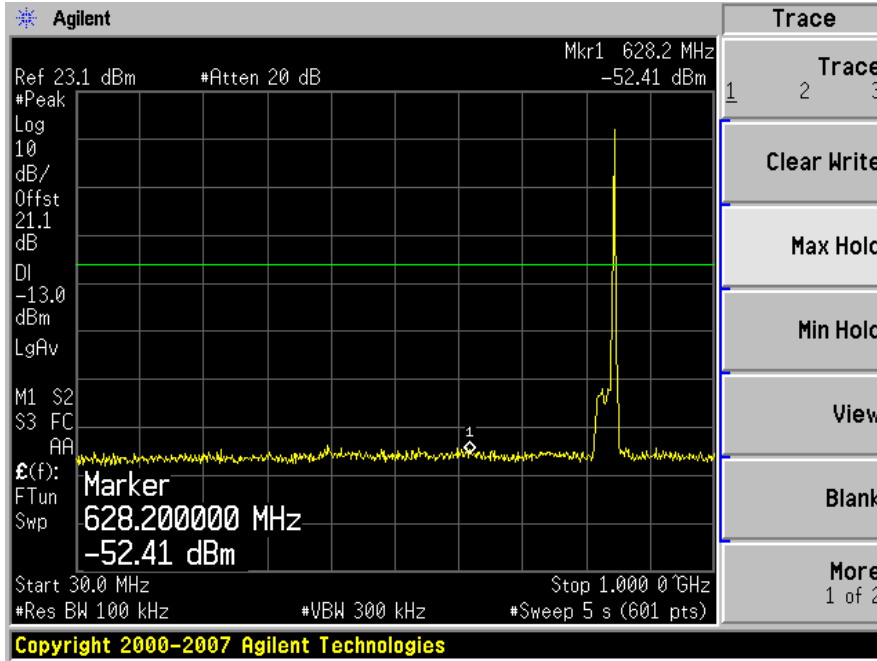


30 MHz to 1 GHz

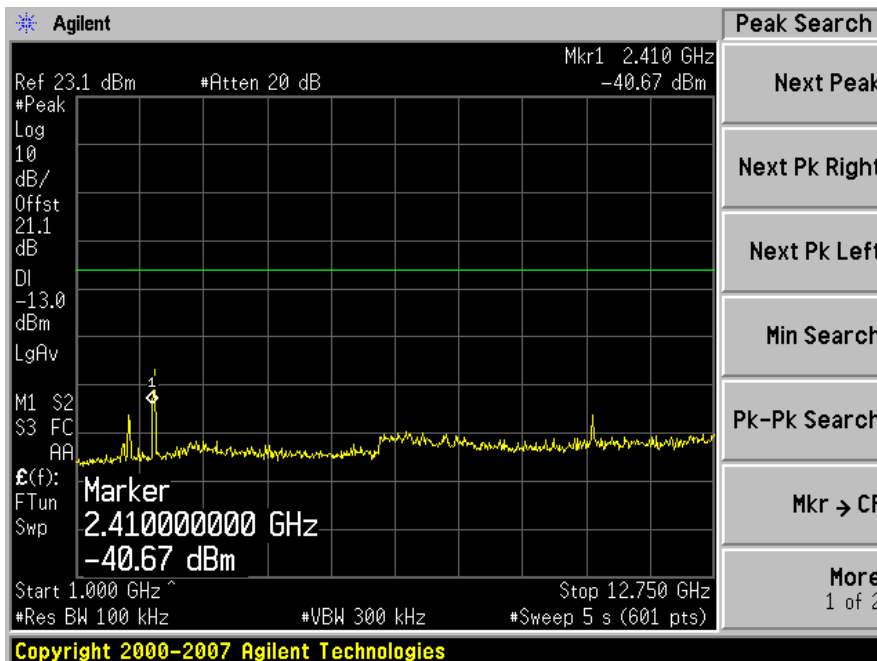


1 GHz to 12.75 GHz

CDMA 850 MHz band Downlink: Low Channel (869.73 MHz)

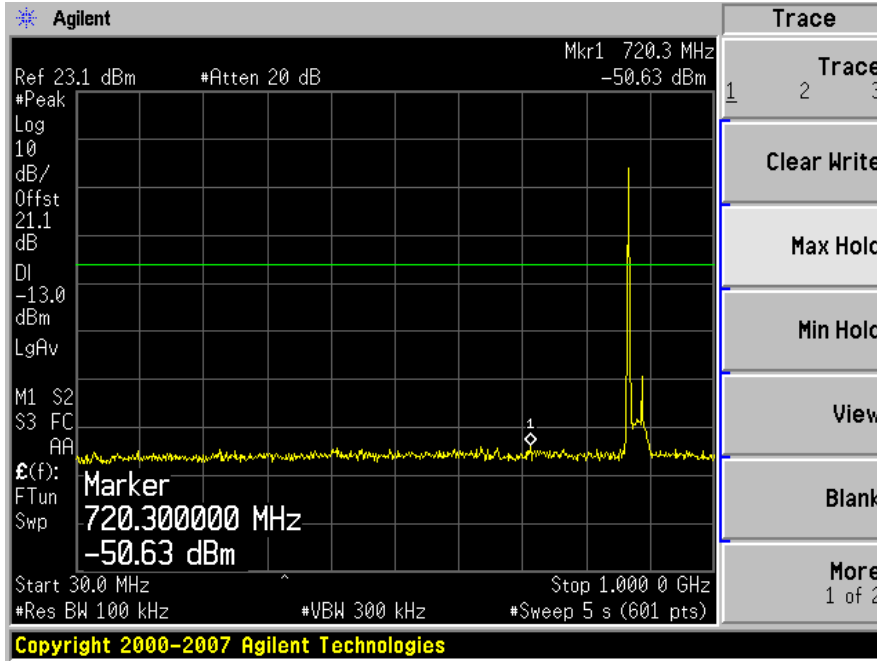


30 MHz to 1 GHz

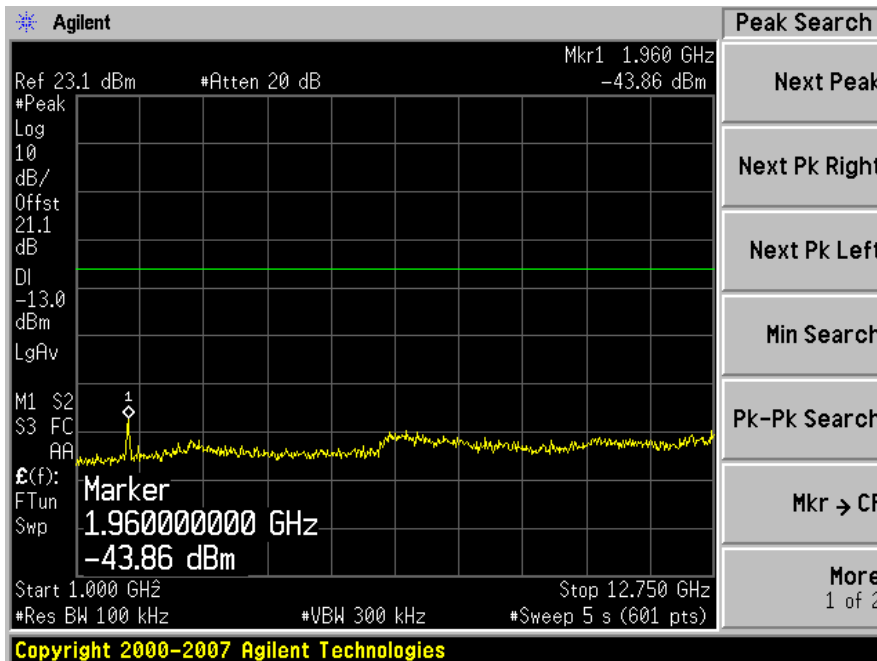


1 GHz to 12.75 GHz

CDMA 850 MHz band Downlink: Middle Channel (881.4 MHz)

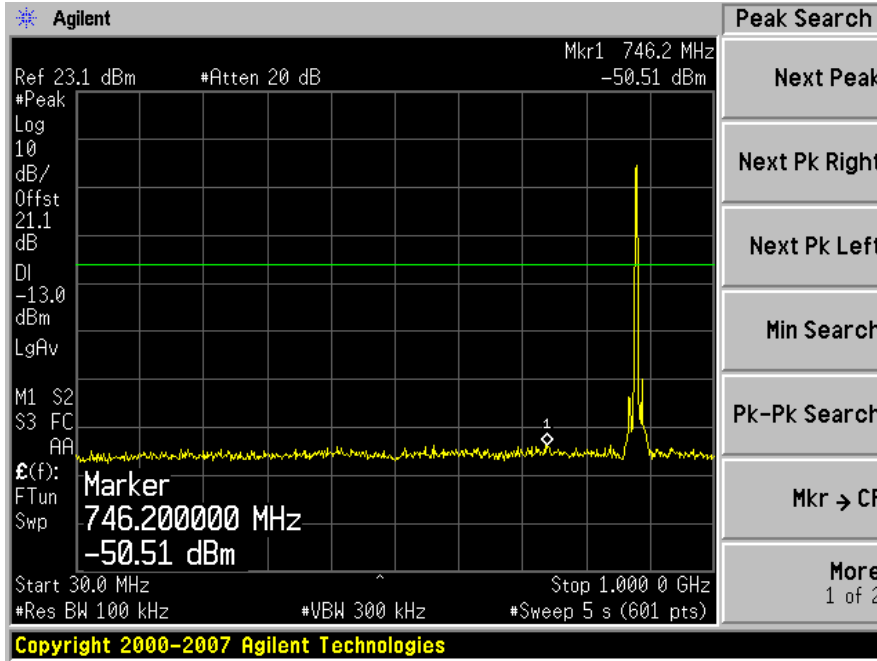


30 MHz to 1 GHz

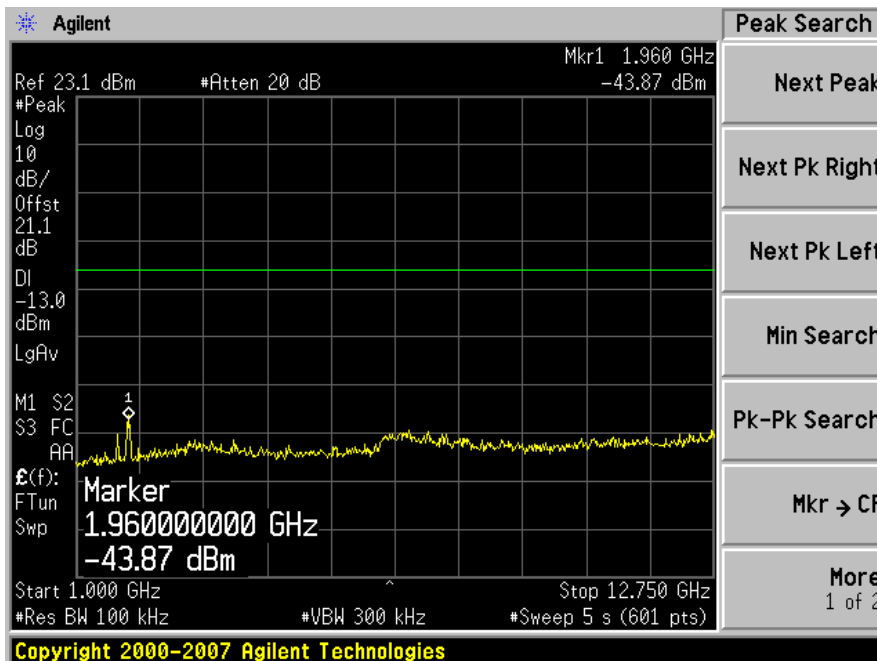


1 GHz to 12.75 GHz

CDMA850 MHz band Downlink: High Channel (893.19 MHz)

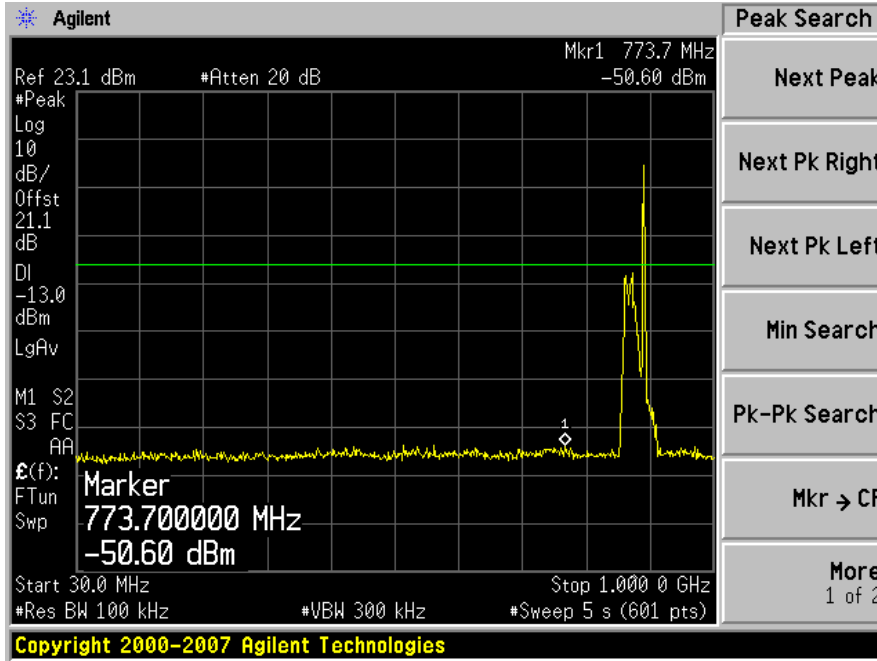


30 MHz to 1 GHz

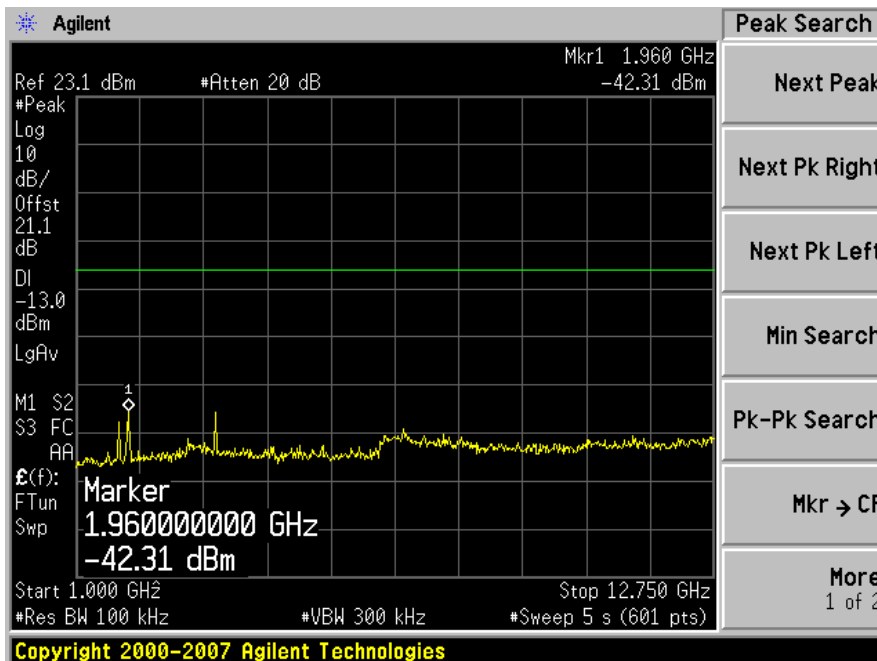


1 GHz to 12.75 GHz


CDMA 1900 MHz band Uplink: Low Channel (1851.25 MHz)

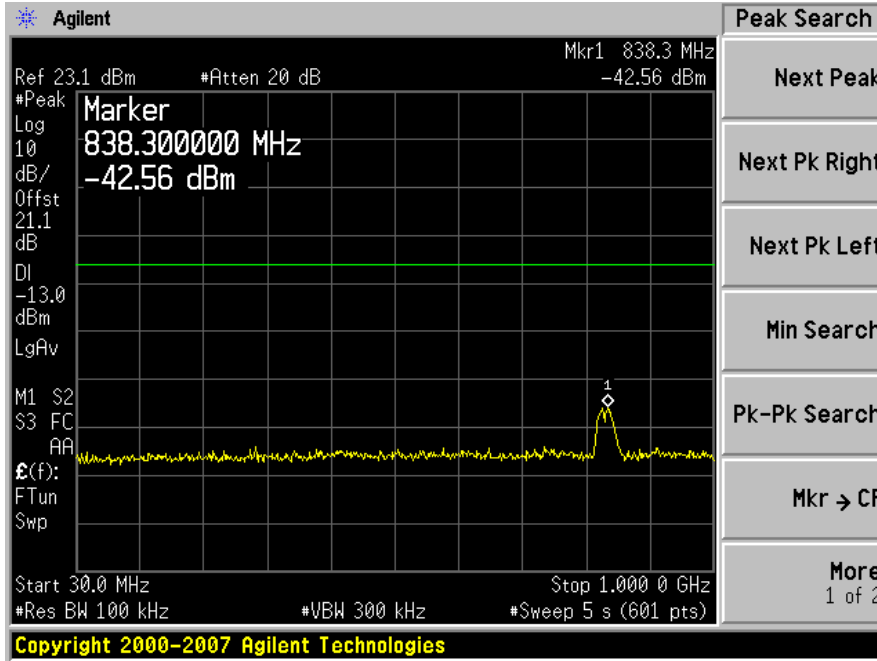

30 MHz to 1 GHz

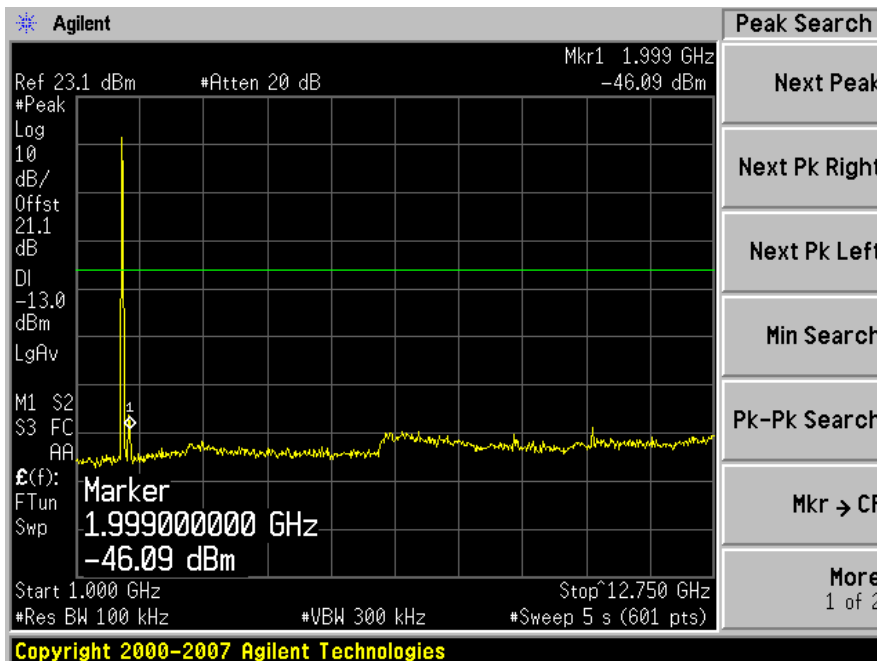


1 GHz to 12.75 GHz

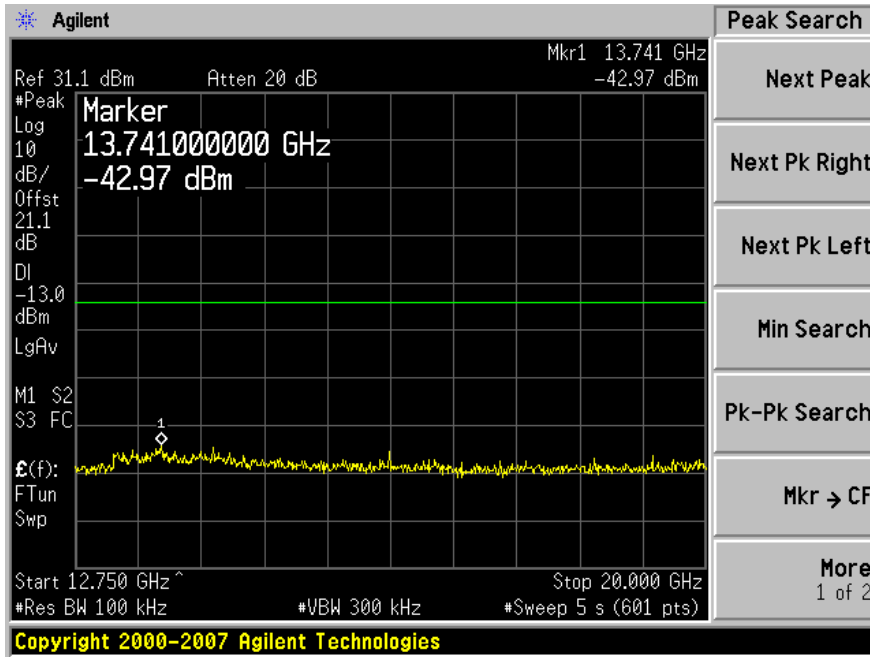


12.75 GHz to 20 GHz


CDMA 1900 MHz band Uplink: Middle Channel (1880 MHz)

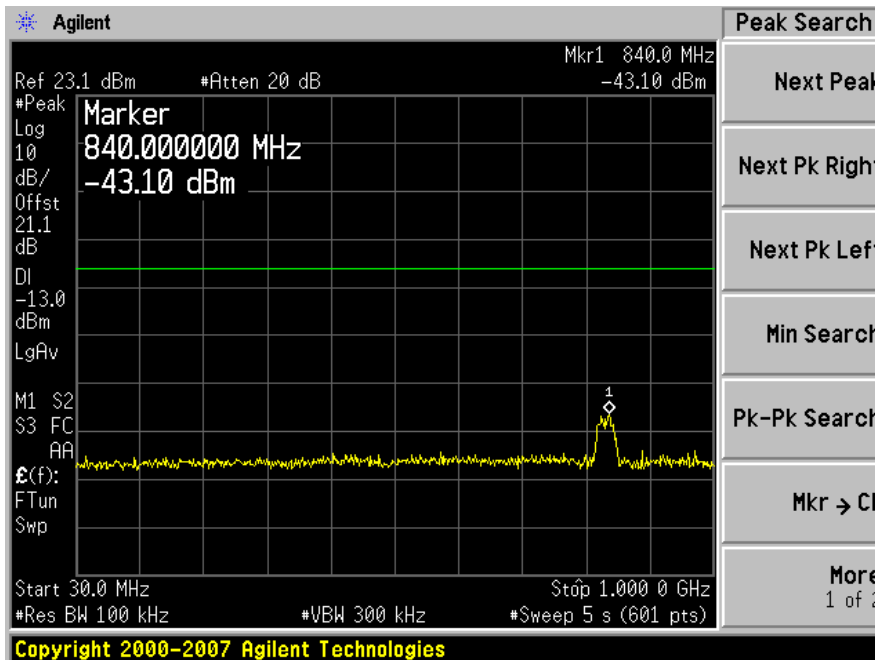

30 MHz to 1 GHz

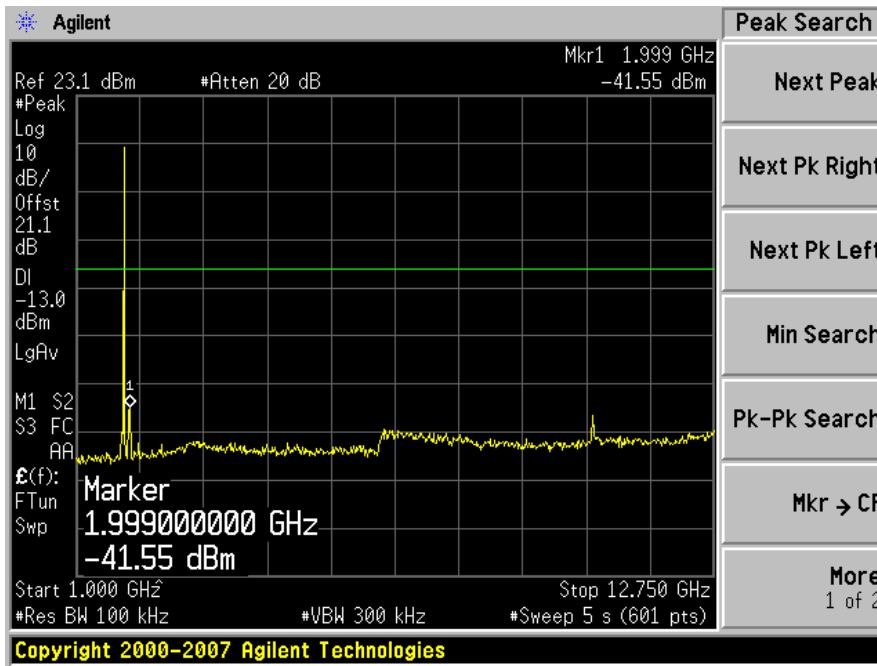


1 GHz to 12.75 GHz

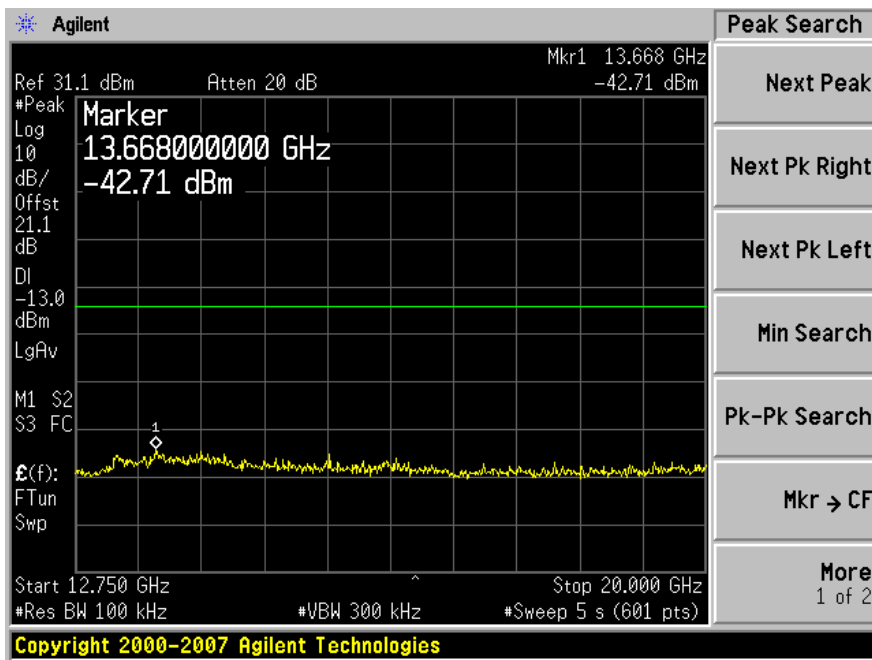


12.75 GHz to 20 GHz


CDMA 1900 MHz band Uplink: High Channel (1908.75 MHz)

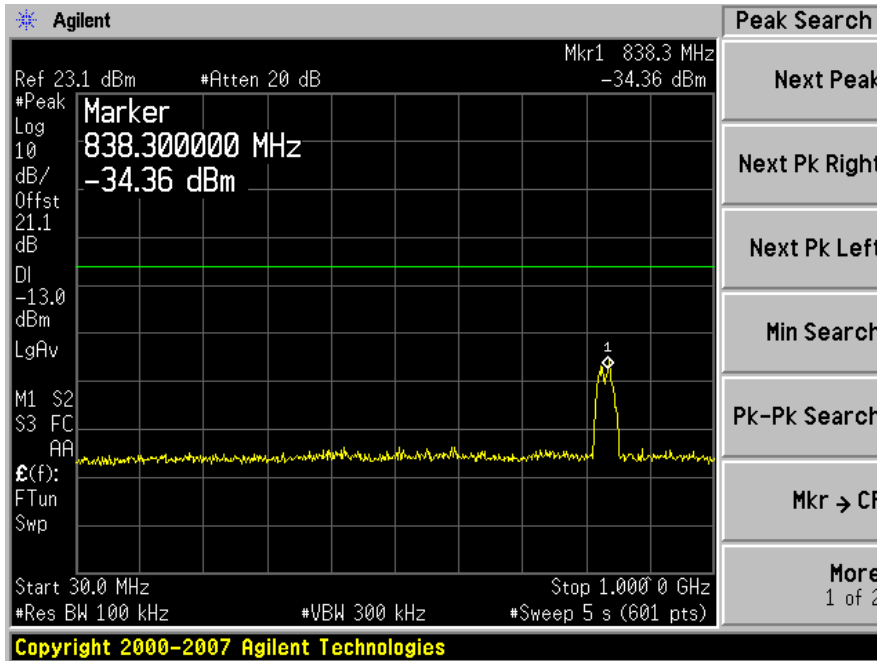

30 MHz to 1 GHz

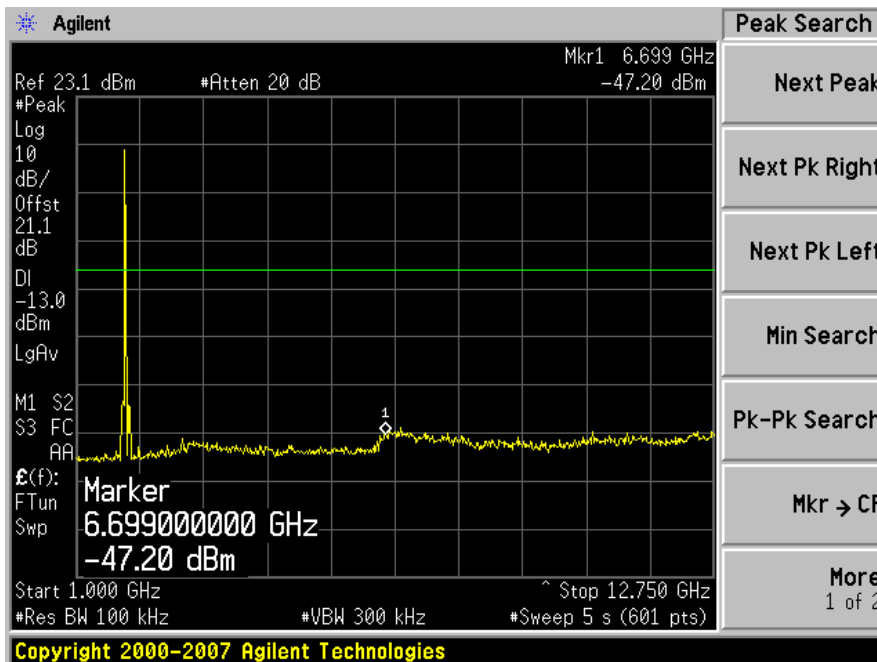


1 GHz to 12.75 GHz

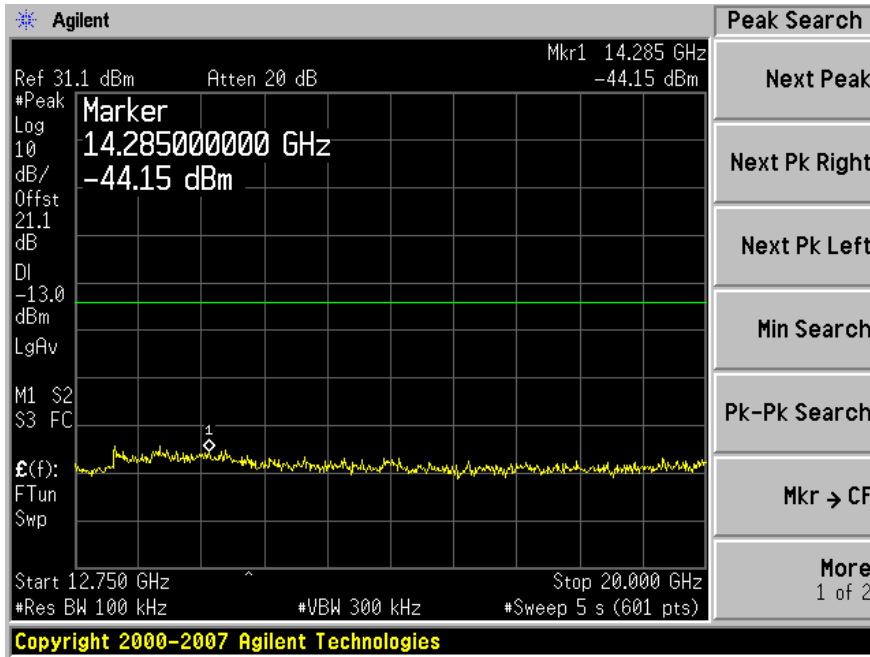


12.75 GHz to 20 GHz


CDMA 1900 MHz band Downlink: Low Channel (1931.25 MHz)

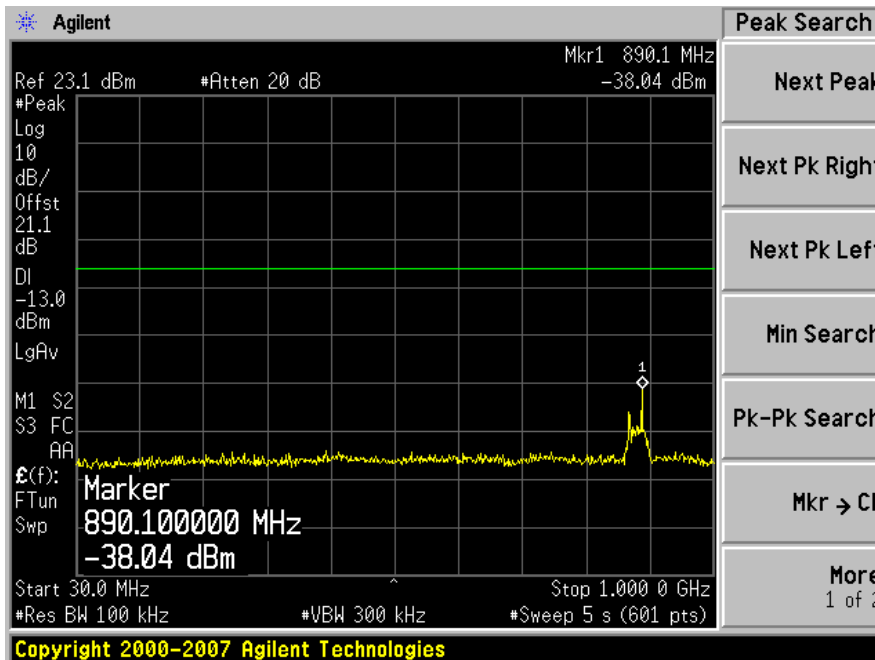

30 MHz to 1 GHz

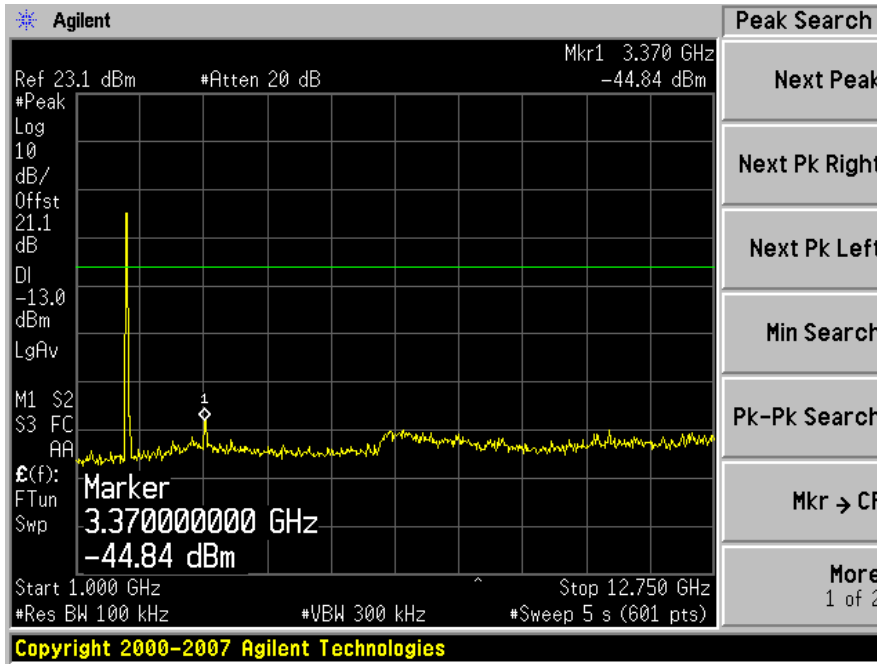


1 GHz to 12.75 GHz

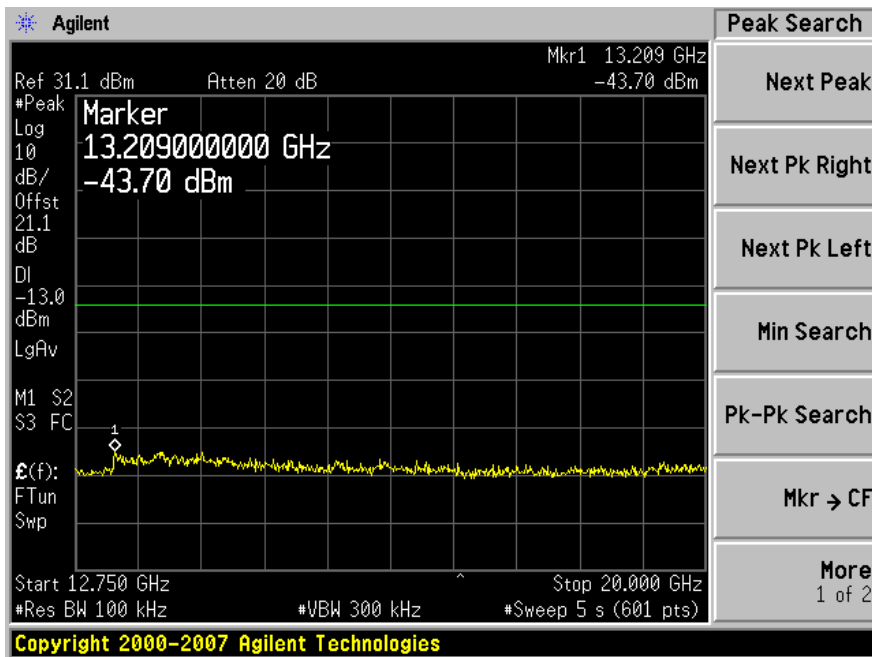


12.75 GHz to 20 GHz


CDMA 1900 MHz band Downlink: Middle Channel (1960 MHz)

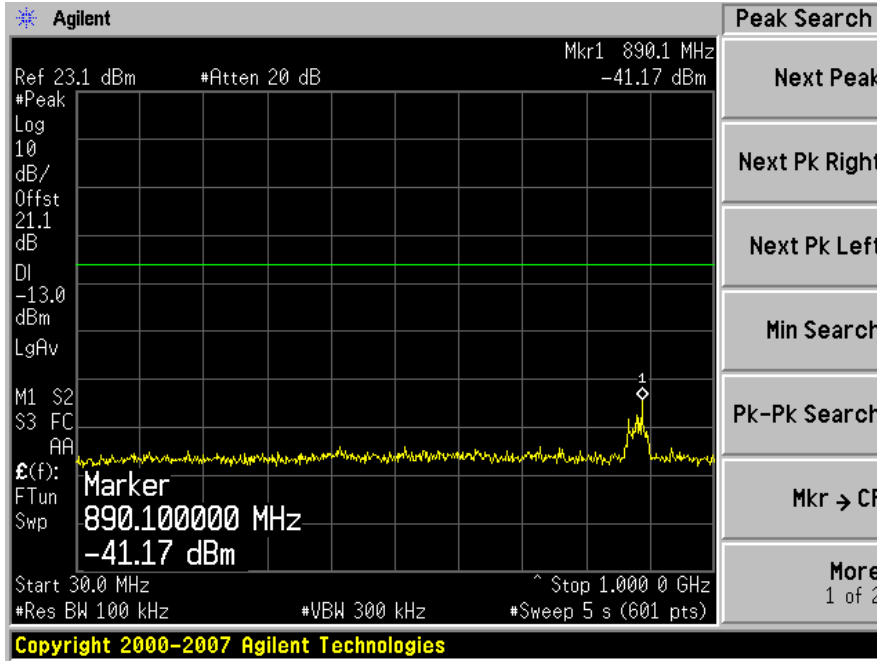

30 MHz to 1 GHz

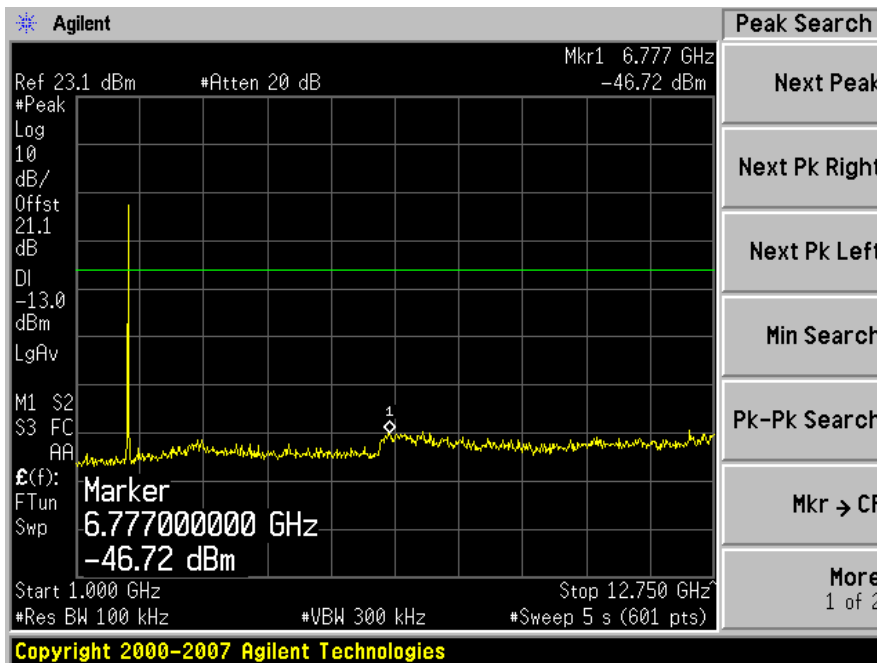


1 GHz to 12.75 GHz

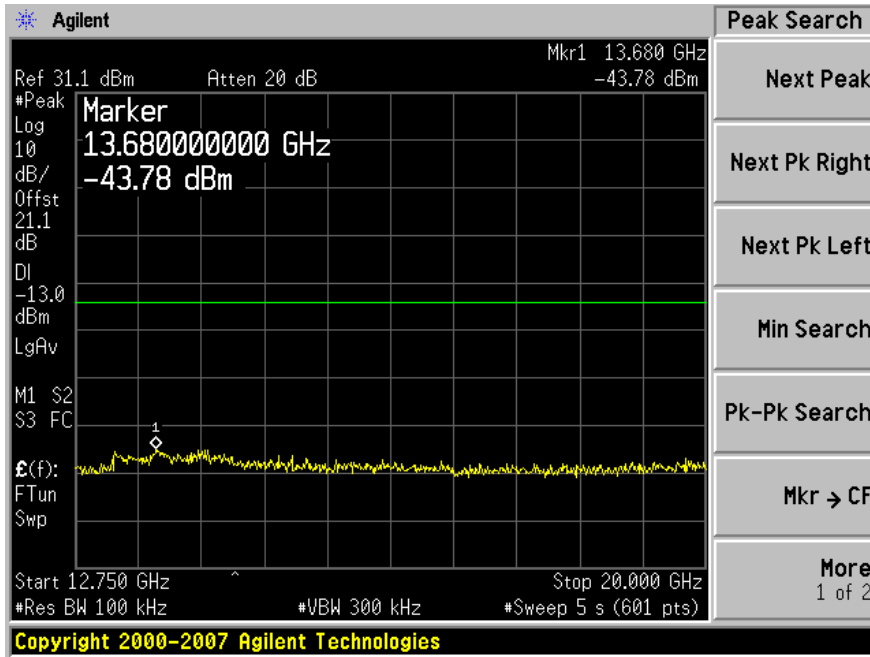


12.75 GHz to 20 GHz


CDMA 1900 MHz band Downlink: High Channel (1988.75 MHz)

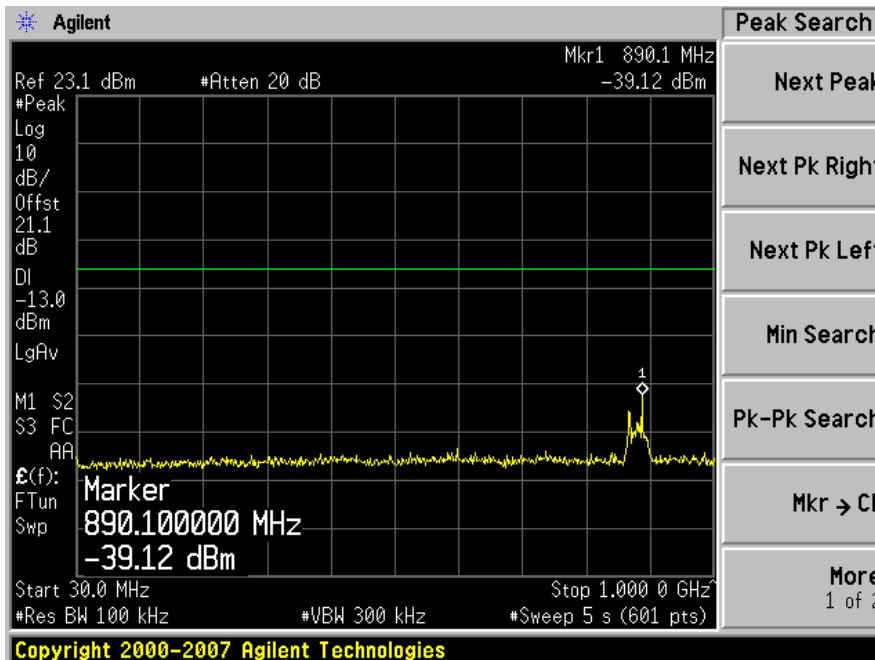

30 MHz to 1 GHz

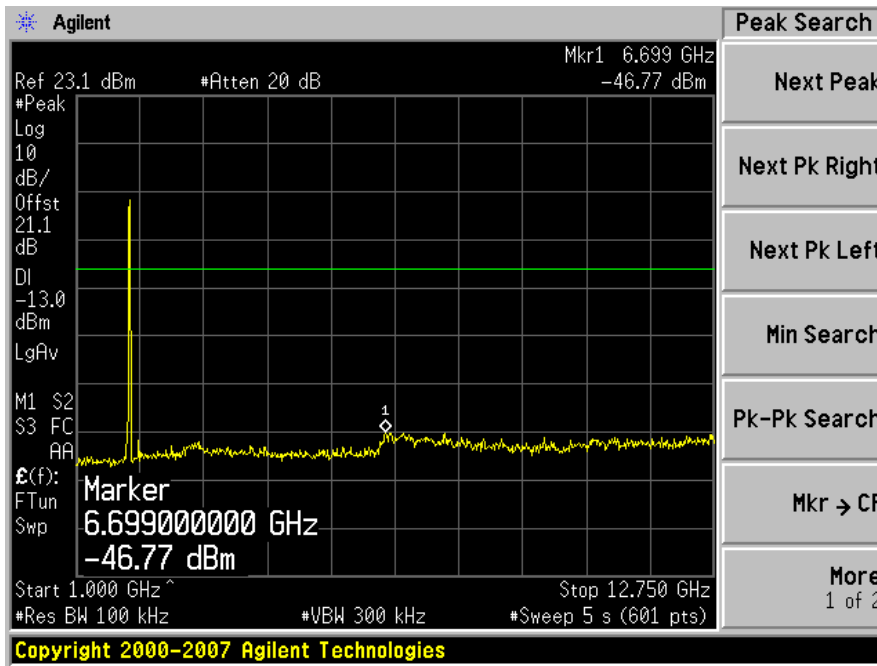

1 GHz to 12.75 GHz

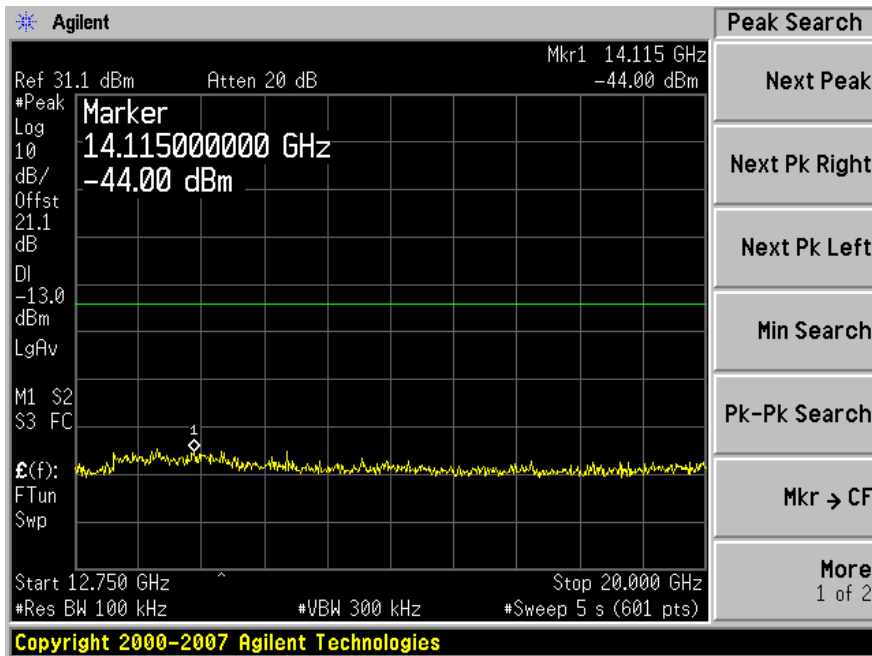

12.75 GHz to 20 GHz

9 FCC §22.917 & §24.238– BAND EDGE

9.1 Applicable Standard

According to § 22.917, the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

9.2 Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

9.3 Environmental Conditions

Temperature:	18~23 °C
Relative Humidity:	30~42 %
ATM Pressure:	101.1~102.1kPa

* The testing was performed by Jack Liu on 2009-8-03 ~ 2009-8-10

9.4 Test Equipment List and Details


Manufacturer	Description	Model	Serial Number	Calibration Date
Rohde & Schwarz	Generator, Signal	SMIQ03	849192/0085	2008-10-14
Agilent	Spectrum Analyzer	E4440A	MY44303352	2009-04-28

* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.


9.5 Test Results

Please refer to the following plots.

GSM 850 MHz band Uplink Band Edge

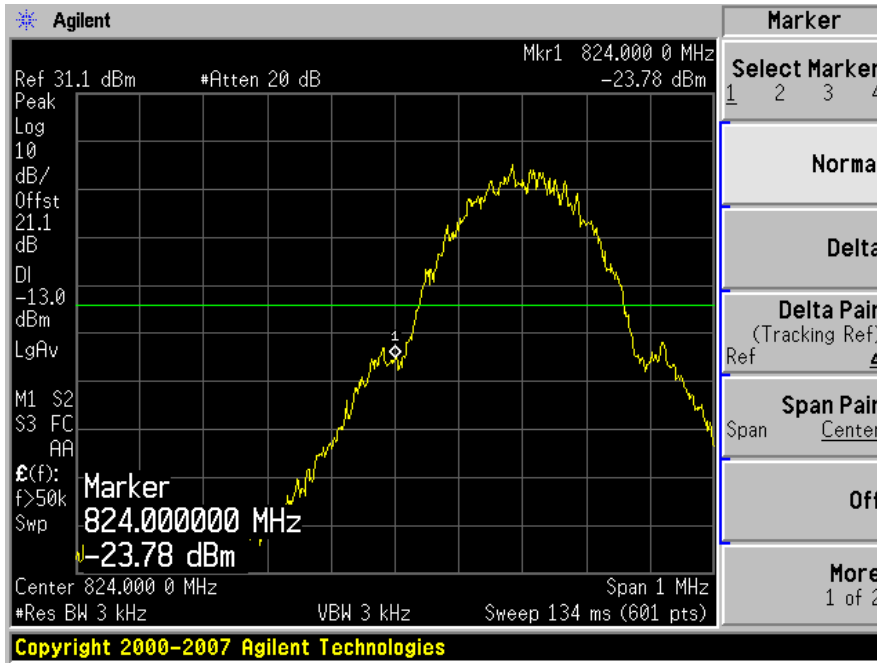


Low Channel

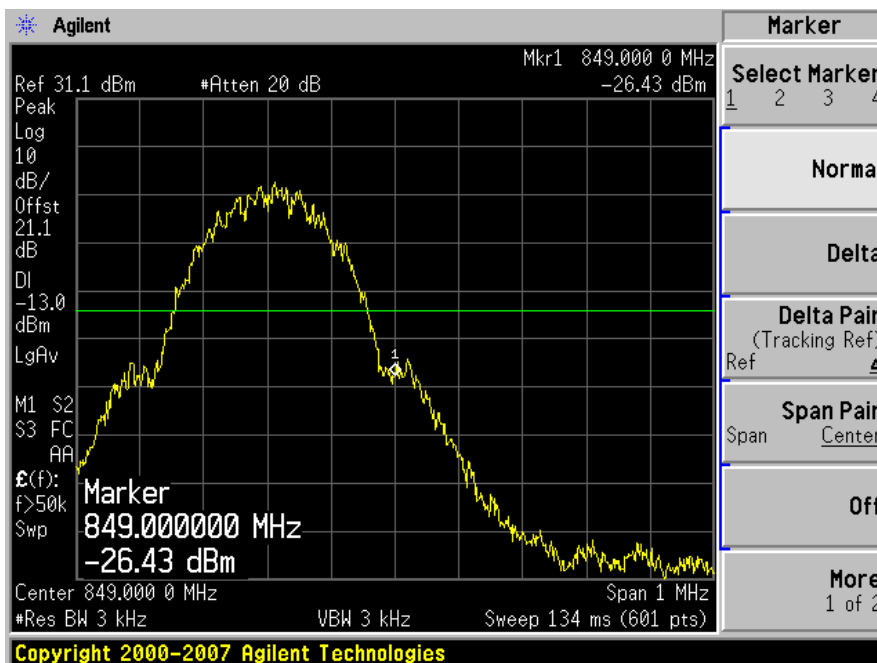


High Channel

GSM 850 MHz band Downlink Band Edge

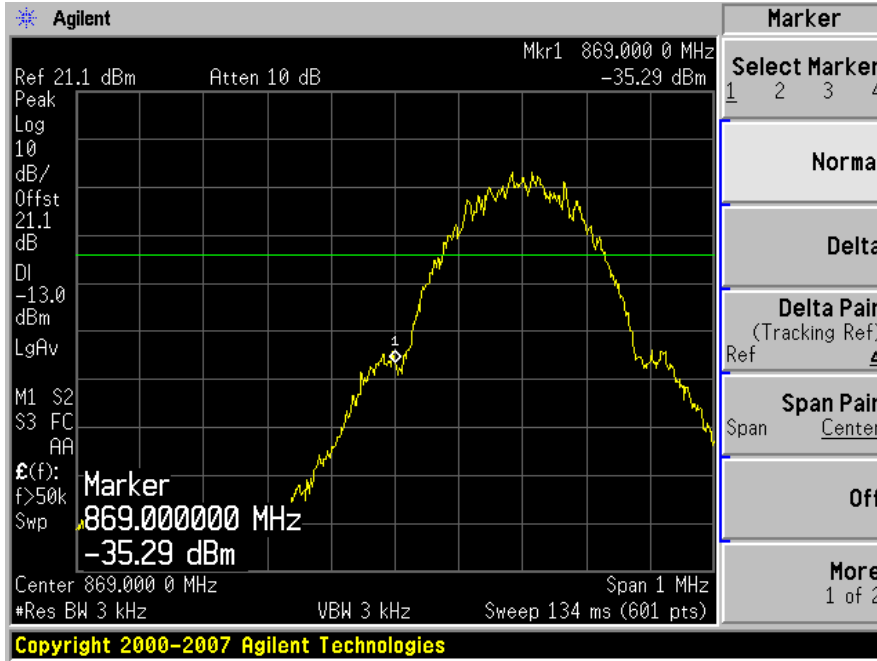


Low Channel

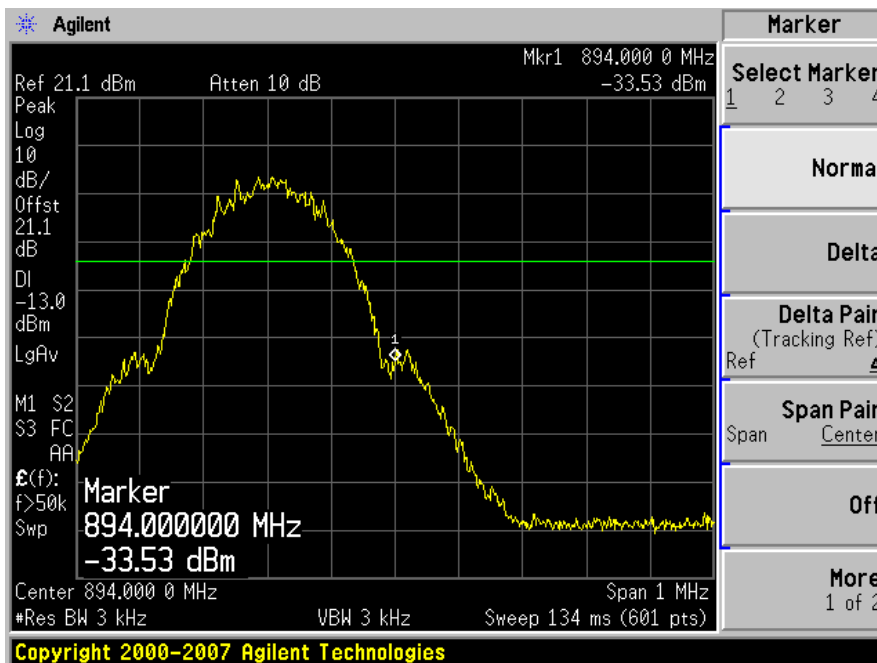


High Channel

GSM 1900 MHz band Uplink Band Edge

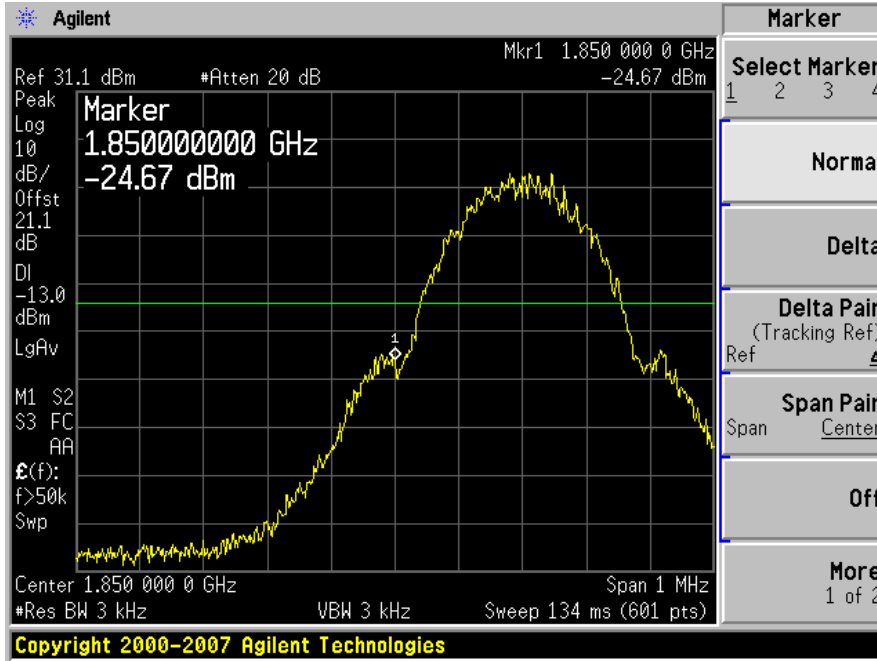


Low Channel

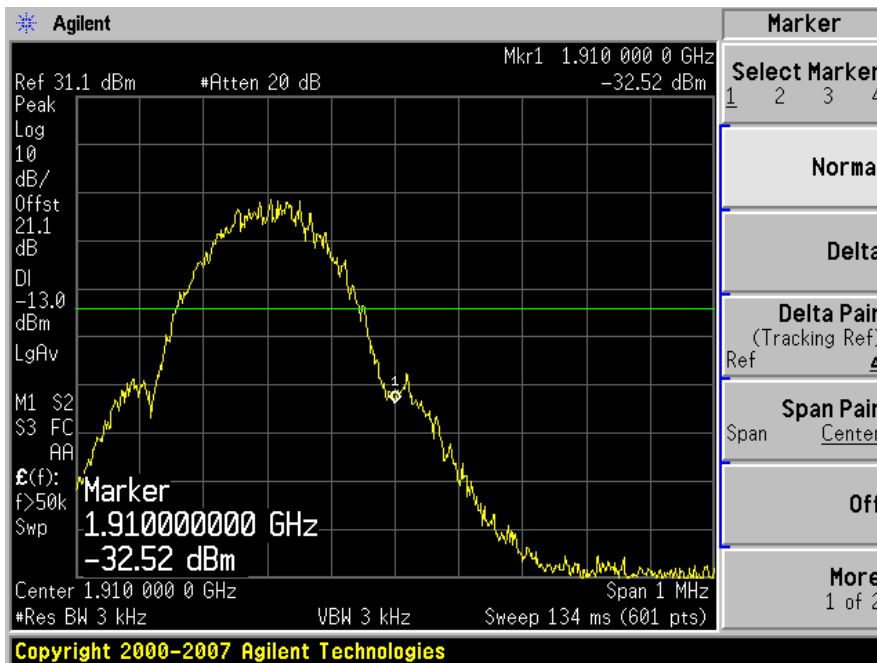


High Channel

GSM 1900 MHz band Downlink Band Edge

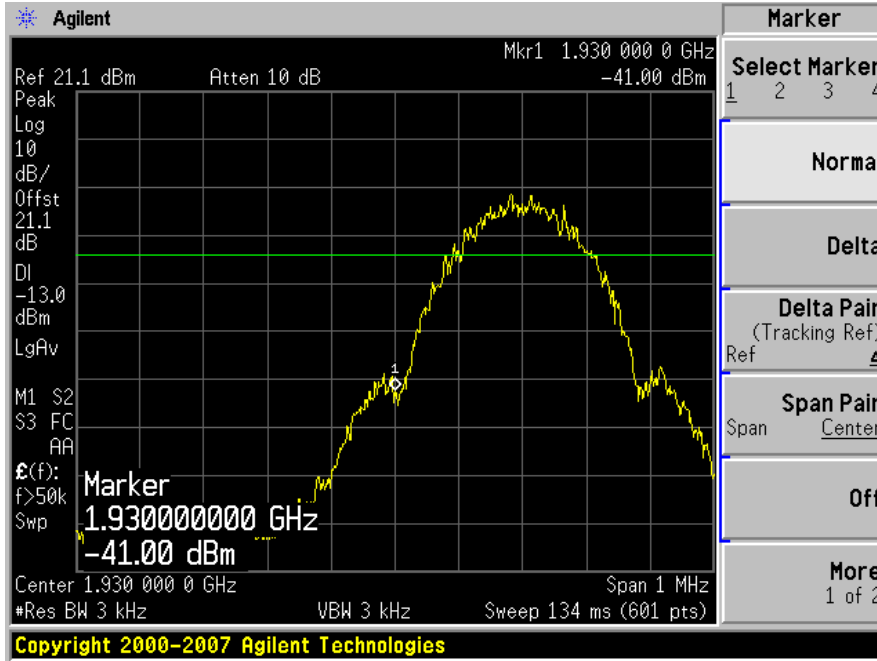


Low Channel

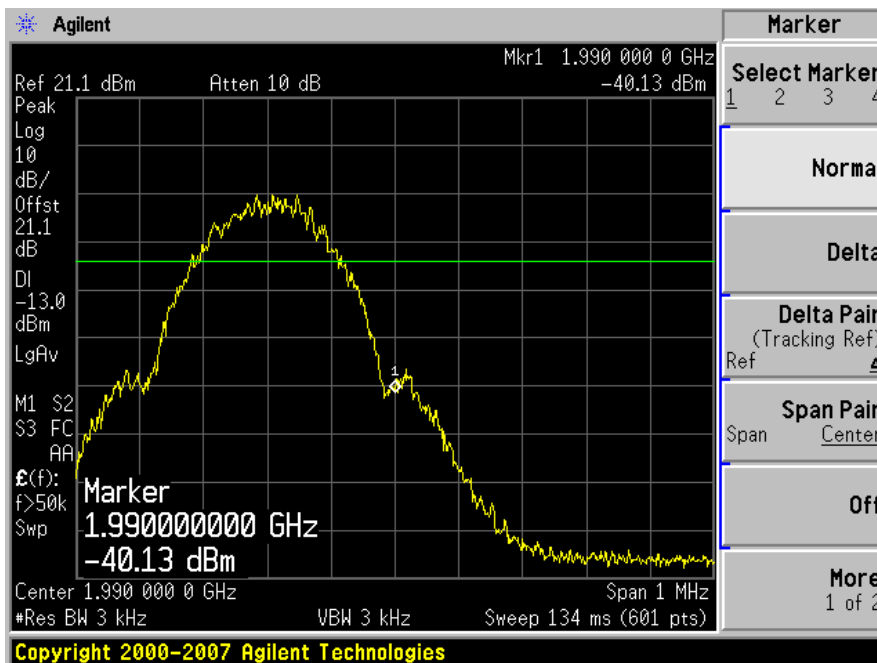


High Channel

CDMA 850 MHz band Uplink Band Edge

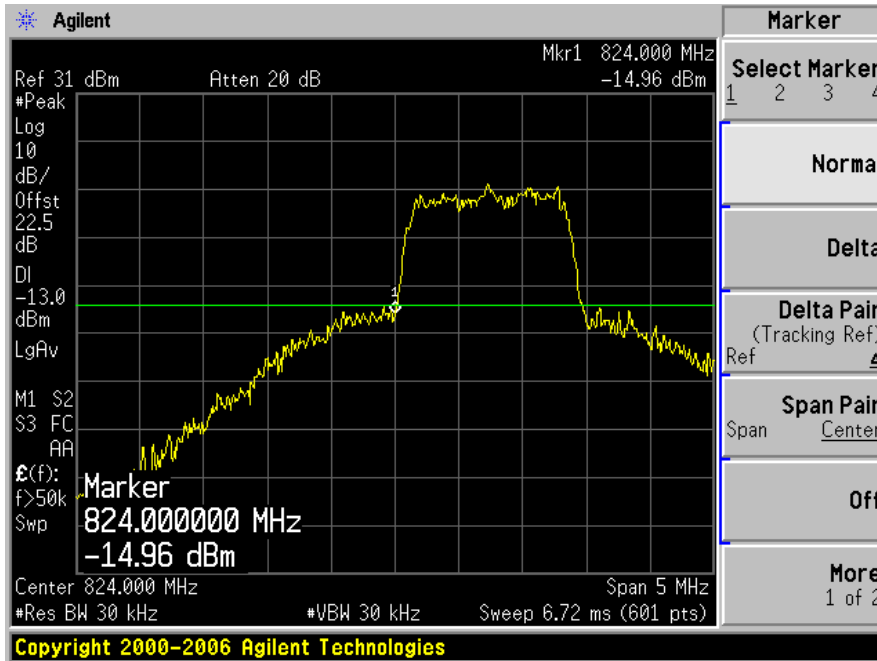


Low Channel

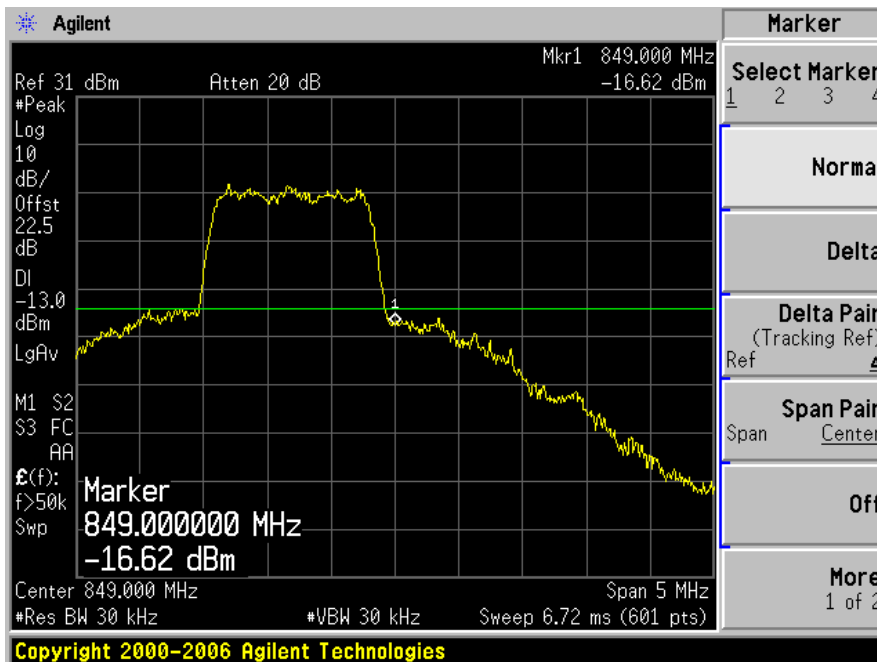


High Channel

CDMA 850 MHz band Downlink Band Edge

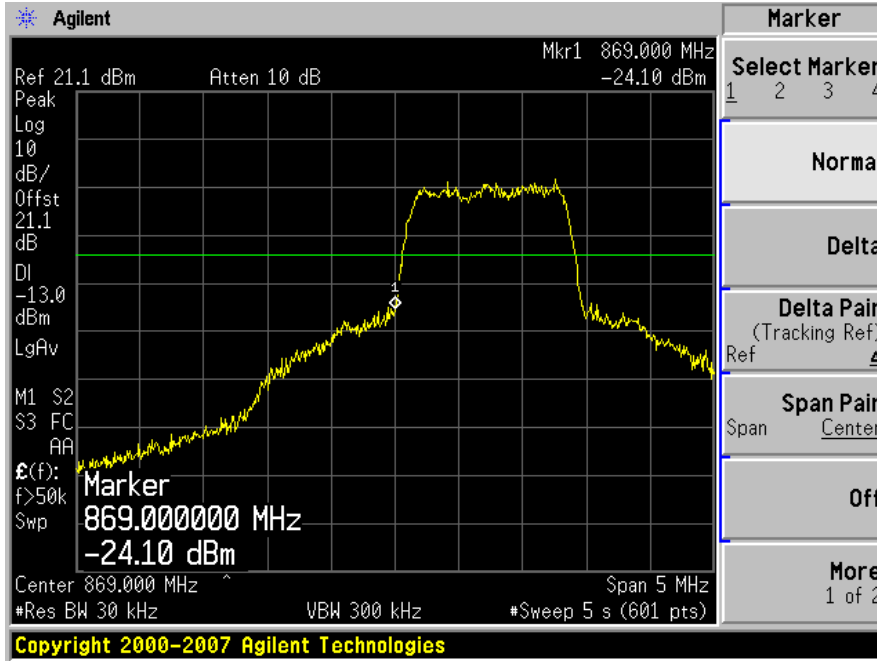


Low Channel

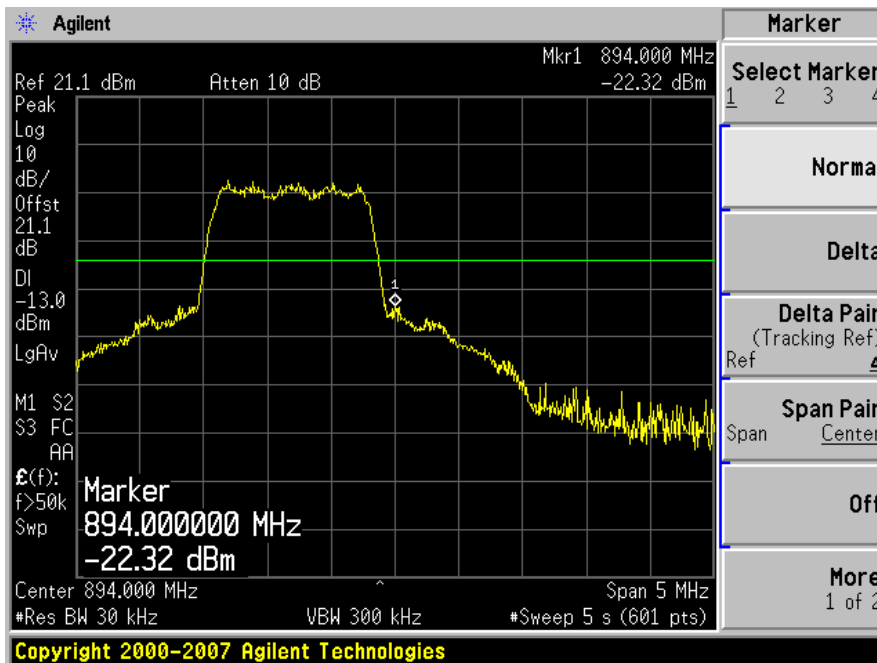


High Channel

CDMA 1900 MHz band Uplink Band Edge

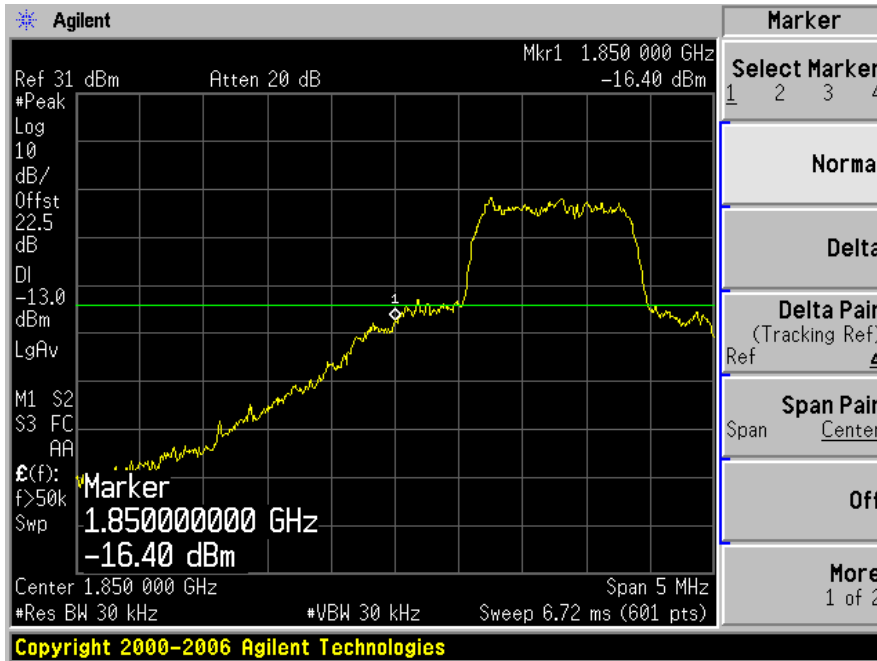


Low Channel

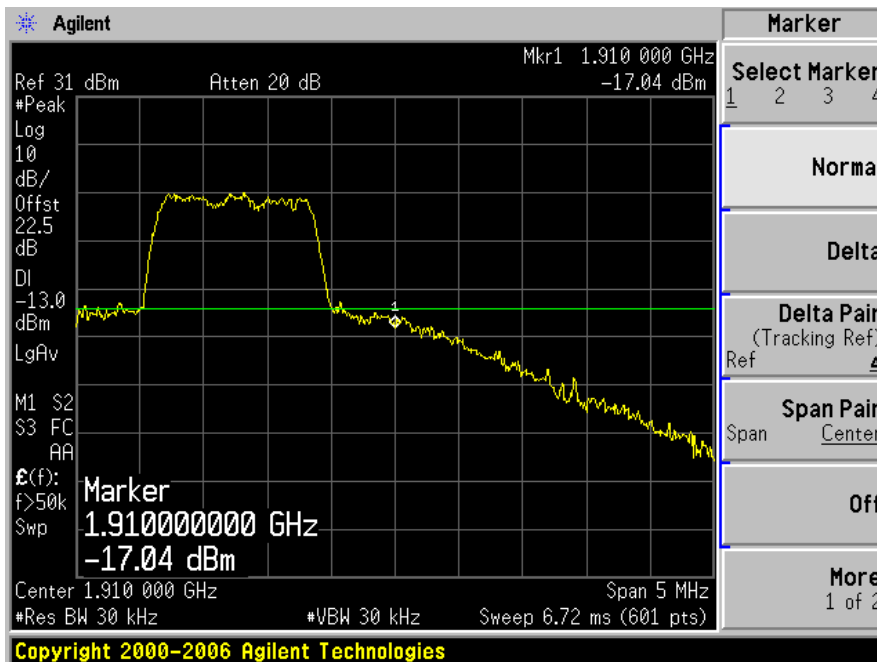


High Channel

CDMA 1900 MHz band Downlink Band Edge

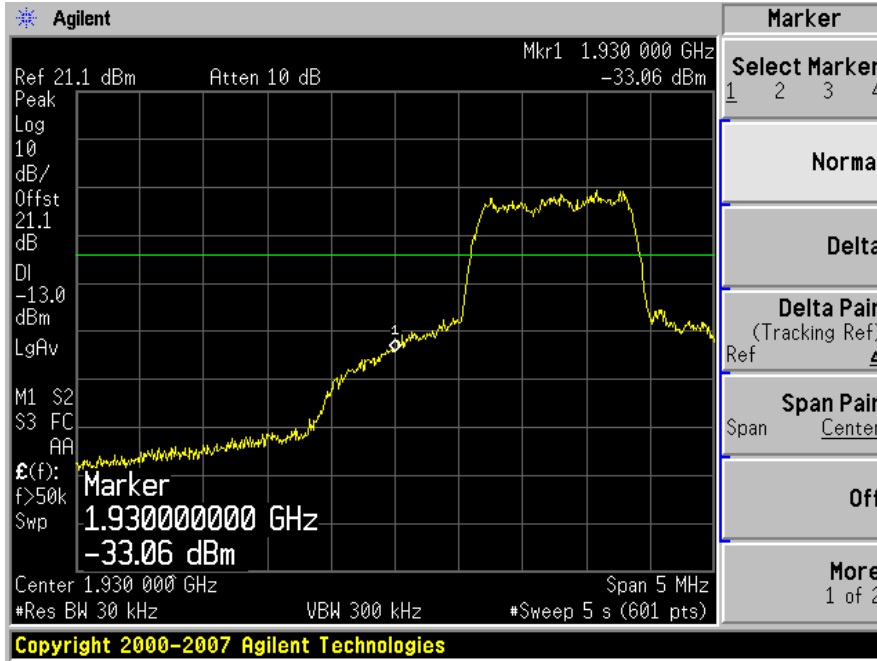

Low Channel

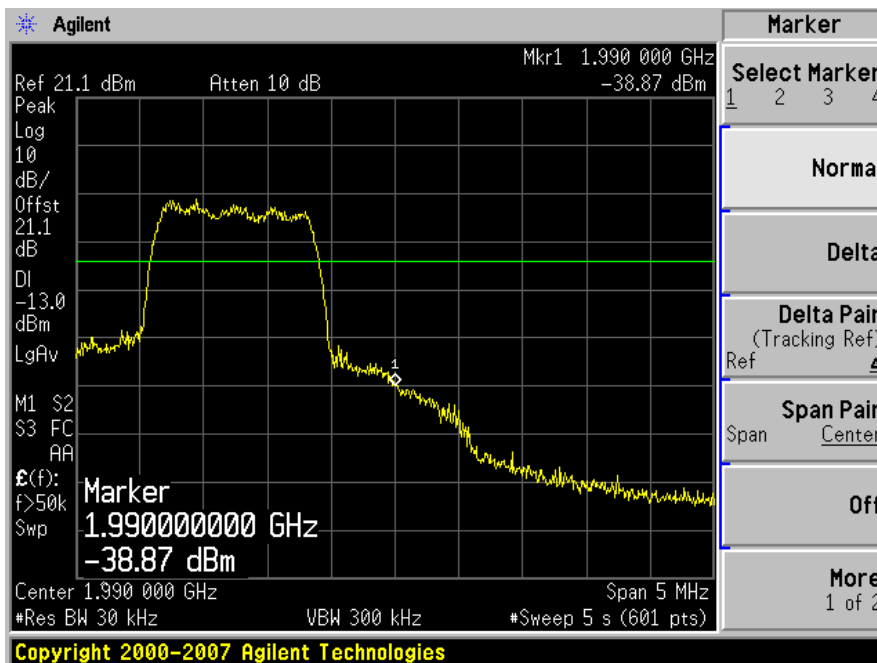

High Channel

10 FCC §2.1055 – Frequency Stability

This EUT is an amplifier, not a transmitter. There is no oscillator circuit in the EUT, therefore there is no frequency stability measurement required.

10.1 Test Result

N/A

11 FCC §1.1307(b) (1) & §2.1091 - RF EXPOSURE

11.1 Applicable Standard

According to §1.1310 and §2.1091 (Mobile Devices) RF exposure is calculated.

Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

Note: f = frequency in MHz

* = Plane-wave equivalent power density

11.2 MPE Prediction

Predication of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

850 MHz Cellular Band Uplink:

Maximum peak output power at antenna input terminal (dBm): 23.9

Maximum peak output power at antenna input terminal (mW): 245.47

Prediction distance (cm): 25.0

Prediction frequency (MHz): 836.6

Antenna Gain, typical (dBi): 9.0

Maximum Antenna Gain (numeric): 7.94

Power density at predication frequency and distance (mW/cm²): 0.248

MPE limit for uncontrolled exposure at predication frequency (mW/cm²): 0.558

850 MHz Cellular Band Downlink:

Maximum peak output power at antenna input terminal (dBm):	<u>14.93</u>
Maximum peak output power at antenna input terminal (mW):	<u>31.11</u>
Prediction distance (cm):	<u>25.0</u>
Prediction frequency (MHz):	<u>881.6</u>
Antenna Gain, typical (dBi):	<u>9.0</u>
Maximum Antenna Gain (numeric):	<u>7.94</u>
Power density at predication frequency and distance (mW/cm ²):	<u>0.031</u>
MPE limit for uncontrolled exposure at predication frequency (mW/cm ²):	<u>0.588</u>

1900 MHz PCS Band Uplink:

Maximum peak output power at antenna input terminal (dBm):	<u>19.6</u>
Maximum peak output power at antenna input terminal (mW):	<u>91.2</u>
Prediction distance (cm):	<u>25.0</u>
Prediction frequency (MHz):	<u>1880</u>
Antenna Gain, typical (dBi):	<u>9.0</u>
Maximum Antenna Gain (numeric):	<u>7.94</u>
Power density at predication frequency and distance (mW/cm ²):	<u>0.092</u>
MPE limit for uncontrolled exposure at predication frequency (mW/cm ²):	<u>1.0</u>

PCS 1900 MHz Band Downlink:

Maximum peak output power at antenna input terminal (dBm):	<u>11.54</u>
Maximum peak output power at antenna input terminal (mW):	<u>14.25</u>
Prediction distance (cm):	<u>25.0</u>
Prediction frequency (MHz):	<u>1960</u>
Antenna Gain, typical (dBi):	<u>9.0</u>
Maximum Antenna Gain (numeric):	<u>7.94</u>
Power density at predication frequency and distance (mW/cm ²):	<u>0.014</u>
MPE limit for uncontrolled exposure at predication frequency (mW/cm ²):	<u>1.0</u>

Test Result

For Uplink, the highest power density level at 25 cm is 0.248mW/cm², which is below the uncontrolled exposure limit of 1 mW/cm² at 836.6 MHz.

For Downlink, the highest power density level at 25 cm is 0.031mW/cm², which is below the uncontrolled exposure limit of 0.588 mW/cm² at 881.6 MHz.

So the indoor antenna prediction distance should be greater then 25 cm, and outdoor antenna prediction distance should be greater then 25 cm.