



FCC PART 22H, 24E



# TEST AND MEASUREMENT REPORT

For

## Cellphone-Mate, Inc.

48820 Kato Road, Suite 300B, Fremont, CA 94539, USA

**FCC ID: RSNDUAL-65UNDER**  
**Model: CM2020 65dB**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Universal Building Repeater
<b>Test Engineer:</b> Jack Liu	
<b>Report Number:</b> R0904244-2224	
<b>Report Date:</b> 2009-05-20	
<b>Reviewed By:</b> Sr. RF Engineer	
<b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (84) 1274 Anvilwood Ave Sunnyvale, CA 94089, USA Tel: (408) 732-9162 Fax: (408) 732 9164	

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP\*, NIST, or any agency of the Federal Government.

\* This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "\*" encl.

## TABLE OF CONTENTS

<b>1</b>	<b>GENERAL INFORMATION .....</b>	<b>5</b>
1.1	PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
1.2	MECHANICAL DESCRIPTION .....	5
1.3	EUT PHOTO.....	5
1.4	OBJECTIVE.....	6
1.5	RELATED SUBMITTAL(S)/GRANT(S).....	6
1.6	TEST METHODOLOGY .....	6
1.7	MEASUREMENT UNCERTAINTY.....	6
1.8	TEST FACILITY.....	7
<b>2</b>	<b>SYSTEM TEST CONFIGURATION .....</b>	<b>8</b>
2.1	JUSTIFICATION .....	8
2.2	EUT EXERCISE SOFTWARE.....	8
2.3	EQUIPMENT MODIFICATIONS .....	8
2.4	POWER SUPPLY AND LINE FILTERS .....	8
2.5	LOCAL SUPPORT EQUIPMENT LIST AND DETAILS .....	8
2.6	INTERFACE PORTS AND CABLING .....	8
<b>3</b>	<b>SUMMARY OF TEST RESULTS.....</b>	<b>9</b>
<b>4</b>	<b>§2.1046, §22.913(A) &amp; §24.232 – RF OUTPUT POWER .....</b>	<b>10</b>
4.1	APPLICABLE STANDARD .....	10
4.2	TEST PROCEDURE .....	10
4.3	ENVIRONMENTAL CONDITIONS.....	10
4.4	TEST EQUIPMENT LIST AND DETAILS .....	10
4.5	SUMMARY OF TEST RESULTS.....	11
<b>5</b>	<b>§2.1047 - MODULATION CHARACTERISTIC.....</b>	<b>12</b>
5.1	APPLICABLE STANDARD .....	12
5.2	TEST RESULT .....	12
<b>6</b>	<b>§2.1049, §22.917 &amp; §24.238 - OCCUPIED BANDWIDTH.....</b>	<b>13</b>
6.1	APPLICABLE STANDARD .....	13
6.2	TEST PROCEDURE .....	13
6.3	ENVIRONMENTAL CONDITIONS.....	13
6.4	TEST EQUIPMENT LIST AND DETAILS .....	13
6.5	SUMMARY OF TEST RESULTS.....	14
<b>7</b>	<b>§2.1053, §22.917 &amp; §24.238 - SPURIOUS RADIATED EMISSIONS.....</b>	<b>39</b>
7.1	APPLICABLE STANDARD .....	39
7.2	TEST PROCEDURE .....	39
7.3	ENVIRONMENTAL CONDITIONS.....	39
7.4	TEST EQUIPMENT LIST AND DETAILS .....	39
7.5	SUMMARY OF TEST RESULTS.....	40
7.6	TEST RESULTS .....	41
<b>8</b>	<b>§2.1051, §22.917 &amp; §24.238- SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....</b>	<b>44</b>
8.1	APPLICABLE STANDARD .....	44
8.2	TEST PROCEDURE .....	44

8.3	ENVIRONMENTAL CONDITIONS.....	44
8.4	TEST EQUIPMENT LIST AND DETAILS .....	44
8.5	TEST RESULTS .....	44
<b>9</b>	<b>§22.917 &amp; §24.238– BAND EDGE.....</b>	<b>85</b>
9.1	APPLICABLE STANDARD .....	85
9.2	TEST PROCEDURE .....	85
9.3	ENVIRONMENTAL CONDITIONS.....	85
9.4	TEST EQUIPMENT LIST AND DETAILS .....	85
9.5	TEST RESULTS .....	85
<b>10</b>	<b>§2.1055 – FREQUENCY STABILITY.....</b>	<b>94</b>
10.1	TEST RESULT .....	94
<b>11</b>	<b>§1.1307(B) (1) &amp; §2.1091 - RF EXPOSURE .....</b>	<b>95</b>
11.1	APPLICABLE STANDARD .....	95
11.2	MPE PREDICTION .....	95
<b>12</b>	<b>EXHIBIT A - FCC ID LABELING AND WARNING STATEMENT .....</b>	<b>97</b>
12.1	FCC ID LABEL REQUIREMENT .....	97
12.2	FCC ID LABEL .....	97
12.3	FCC LABEL LOCATION ON EUT .....	97
12.4	FCC WARNING STATEMENT .....	97
<b>13</b>	<b>EXHIBIT B - TEST SETUP PHOTOGRAPHS.....</b>	<b>98</b>
13.1	RADIATED EMISSIONS - FRONT VIEW .....	98
13.2	RADIATED EMISSIONS - REAR VIEW .....	98
<b>14</b>	<b>EXHIBIT C – EUT PHOTOGRAPHS.....</b>	<b>99</b>
14.1	EUT - TOP VIEW.....	99
14.2	EUT - BOTTOM VIEW .....	99
14.3	EUT - SIDE VIEW (1) .....	100
14.4	EUT - SIDE VIEW (2) .....	100
14.5	EUT - PORT VIEW (1) .....	101
14.6	EUT – PORT VIEW (2) .....	101
14.7	EUT – AC/DC ADAPTER VIEW .....	102
14.8	EUT – TOP SIDE WITHOUT COVER VIEW (1).....	102
14.9	EUT – To SIDE WITHOUT COVER VIEW (2) .....	103
14.10	EUT – BOTTOM SIDE WITHOUT COVER VIEW.....	103
14.11	EUT – POWER BOARD ASSEMBLY TOP VIEW .....	104
14.12	EUT – RF AMPLIFIER BOARD ASSEMBLY TOP VIEW .....	104

**DOCUMENT REVISION HISTORY**

<b>Revision Number</b>	<b>Report Number</b>	<b>Description of Revision</b>	<b>Date of Revision</b>
0	R0904244-2224	Original	2009-05-20

## 1 GENERAL INFORMATION

### 1.1 Product Description for Equipment under Test (EUT)

The *Cellphone-Mate Inc.* product, *CM2020 65dB*, FCC ID: RSNDUAL-65UNDER or the "EUT" as referred to in this report, is a Universal Building Repeater with N female type connector.

#### General Specifications:


- Operating Frequency: *Downlink*: 869-894 MHz and 1930-1990 MHz  
*Uplink*: 824-849 MHz and 1850-1910 MHz
- Emission Designator: F9W, GXW
- Modulation: CDMA, GSM
- Power Source: Input: 110V/60Hz; Output: DC 9V

### 1.2 Mechanical Description

The EUT dimension is approximately 187mm (L) x 184 mm (W) x 50 mm (H) and weighs approximately 2018.5g.

\* *The test data gathered are from typical production sample, serial number: R0904244-1, provided by BACL.*

### 1.3 EUT Photo

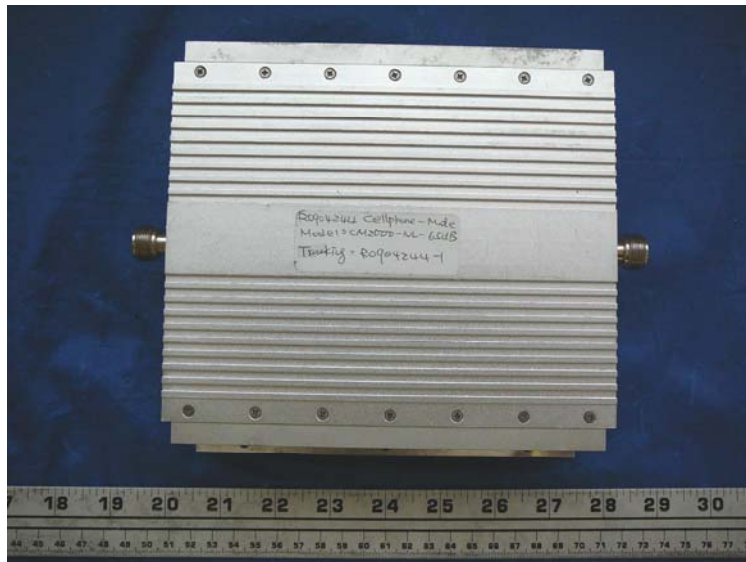

*Please see additional photos in Exhibit C*

## 1.4 Objective

This type approval report is prepared on behalf of Cellphone-Mate, Inc. in accordance with Part 2, Subpart J, Part 22 Subpart H, and Part 24 Subpart E, of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC rules for RF output power, modulation characteristic, occupied bandwidth, spurious emissions at antenna terminal, field strength of spurious radiation, frequency stability, band edge, and conducted and radiated margin.

## 1.5 Related Submittal(s)/Grant(s)

No Related Submittals

## 1.6 Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services  
Part 24 Subpart E - PCS

Applicable Standards: TIA EIA 98-C, TIA/EIA603-C, ANSI C63.4-2003.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

## 1.7 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the values ranging from +2.0 dB for Conducted Emissions tests and +4.0 dB for Radiated Emissions tests are the most accurate estimates pertaining to uncertainty of EMC measurements at BACL Corp.

Detailed instrumentation measurement uncertainties can be found in BACL Corp. report QAP-018.

## 1.8 Test Facility

The test site used by BACL Corp. to collect radiated and conducted emissions measurement data is located at its facility in Sunnyvale, California, USA.

The test sites at BACL have been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and

December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission, Industry Canada, and Voluntary Control Council for Interference has the reports on file and is listed under FCC registration number: 90464, IC registration number: 3062A, and VCCI Registration Number: C-2463 and R-2698. The test site has been approved by the FCC, IC, and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200167-0). The current scope of accreditations can be found at <http://ts.nist.gov/ts/htdocs/210/214/scopes/2001670.htm>

## 2 SYSTEM TEST CONFIGURATION

### 2.1 Justification

The EUT was configured for testing according to TIA/EIA-603-C.

The final qualification test was performed with the EUT operating at normal mode.

### 2.2 EUT Exercise Software

NA, signal was sent through EUT using a signal generator, device was set to normal operating mode.

### 2.3 Equipment Modifications

No modifications were made to the EUT.

### 2.4 Power Supply and Line Filters

Manufacturer	Description	Model	Serial Number
Oriental Hero ELE. FTY.	AC/DC Switch Adapter	OH-1048A0904000U-U	-

### 2.5 Local Support Equipment List and Details

N/A

### 2.6 Interface Ports and Cabling

Cable Description	Length (m)	From	To
RF cable	< 3m	Signal Generator	Input/ EUT
RF cable	< 3m	Output/ EUT	Spectrum analyzer



### 3 SUMMARY OF TEST RESULTS

FCC Rules	Description of Tests	Results
§ 2.1046 § 22.913 (a) § 24.232	RF Output Power	Compliant
§ 2.1047	Modulation Characteristics	N/A*
§ 2.1049 § 22.905 § 22.917 § 24.238	Occupied Bandwidth / Out of Band Emissions	Compliant
§ 2.1053 § 22.917 § 24.238	Spurious Radiated Emissions	Compliant
§ 2.1051 § 22.917	Spurious Emissions at Antenna Terminals	Compliant
§ 22.917 § 24.238	Band Edge	Compliant
§ 2.1055 § 22.355 § 24.235	Frequency Stability	N/A**
§2.1091	RF Exposure	Compliant

Note: \*According to FCC § 2.1047(d) and part 22H, there is no specific requirement for digital modulation and no oscillator circuit, therefore modulation characteristic is not presented.

\*\* There is no oscillator circuit in the EUT, therefore there is no frequency stability measurement required.

## 4 §2.1046, §22.913(a) & §24.232 – RF OUTPUT POWER

### 4.1 Applicable Standard

According to §22.913 (a), the maximum effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts.

According to §24.232 , Mobile/portable stations are limited to 2 watts EIRP peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

### 4.2 Test Procedure

*Conducted:*

The RF output of the transmitter was connected to the signal generator and the spectrum analyzer through sufficient attenuation.

### 4.3 Environmental Conditions

<b>Temperature:</b>	18~22 °C
<b>Relative Humidity:</b>	35~42 %
<b>ATM Pressure:</b>	101.1~101.7 kPa

\* The testing was performed by Jack Liu on 2009-4-29 ~ 2009-5-01

### 4.4 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
Rohde & Schwarz	Generator, Signal	SMIQ03	849192/0085	2008-10-14
Agilent	Analyzer, Spectrum	E4440A	US45303156	2009-03-25

\* **Statement of Traceability: BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

## 4.5 Summary of Test Results

### Maximum Output Power – Modulated Signal

Mode		Channel	Frequency (MHz)	Output Power (dBm)	Output Power (Watt)	Limit (Watt)
GSM	850 MHz Uplink	Low	824.2	22.22	0.167	500
		Middle	836.6	22.42	0.175	500
		High	848.8	21.73	0.149	500
	850 MHz Downlink	Low	869.2	22.79	0.190	500
		Middle	881.6	25.28	0.425	500
		High	893.8	24.94	0.392	500
	1900 MHz Uplink	Low	1850.2	22.20	0.166	2
		Middle	1880.0	23.12	0.205	2
		High	1909.8	16.14	0.041	2
	1900 MHz Downlink	Low	1930.2	19.48	0.089	2
		Middle	1960.0	23.48	0.223	2
		High	1989.8	21.04	0.127	2

Mode		Channel	Frequency (MHz)	Output Power (dBm)	Output Power (Watt)	Limit (Watt)
CDMA	850 MHz Uplink	Low	824.73	20.51	0.112	500
		Middle	836.40	21.08	0.128	500
		High	848.19	18.89	0.077	500
	850 MHz Downlink	Low	869.73	17.98	0.063	500
		Middle	881.40	21.76	0.150	500
		High	893.19	19.86	0.097	500
	1900 MHz Uplink	Low	1851.25	19.32	0.086	2
		Middle	1880.00	20.53	0.113	2
		High	1908.75	16.48	0.044	2
	1900 MHz Downlink	Low	1931.25	16.63	0.046	2
		Middle	1960.00	19.16	0.082	2
		High	1988.75	17.44	0.055	2

---

## **5 §2.1047 - MODULATION CHARACTERISTIC**

---

### **5.1 Applicable Standard**

According to FCC § 2.1047(d) and part 22H, there is no specific requirement for digital modulation and no oscillator circuit, therefore modulation characteristic is not presented.

### **5.2 Test Result**

N/A

## 6 §2.1049, §22.917 & §24.238 - OCCUPIED BANDWIDTH

### 6.1 Applicable Standard

Requirements: CFR 47, Section 2.1049, Section 22.917 and Section 24.238.

### 6.2 Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 30 kHz (Cellular/PCS) and the 26 dB & 99% bandwidth was recorded.

### 6.3 Environmental Conditions

<b>Temperature:</b>	18~22 °C
<b>Relative Humidity:</b>	35~42 %
<b>ATM Pressure:</b>	101.1~101.7 kPa

\* The testing was performed by Jack Liu on 2009-4-29 ~ 2009-5-01

### 6.4 Test Equipment List and Details

Manufacturers	Descriptions	Models	Serial Numbers	Calibration Date
Agilent	Spectrum Analyzer	E4440A	MY44303352	2009-04-28
HP	Signal Generator	8648C	3426A00417	2009-03-25
R & S	Signal Generator	SMIQ03	849192/0085	2008-10-14

\* **Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

## 6.5 Summary of Test Results

Mode		Channel	Frequency (MHz)	Emission Bandwidth 26 dB (kHz)	Emission Bandwidth 99% (kHz)
GSM	850 MHz Uplink	Low	824.20	313.201	244.7043
		Middle	836.60	312.631	245.5420
		High	848.80	312.505	245.4381
	850 MHz Downlink	Low	869.20	305.387	245.0024
		Middle	881.60	312.442	244.3580
		High	893.80	312.795	246.6655
	1900 MHz Uplink	Low	1850.20	311.580	245.6845
		Middle	1880.00	313.135	245.8830
		High	1909.80	310.507	245.0976
	1900 MHz Downlink	Low	1930.20	314.659	245.6239
		Middle	1960.00	314.769	243.0311
		High	1989.80	310.290	245.3122


Mode		Channel	Frequency (MHz)	Emission Bandwidth 26 dB (MHz)	Emission Bandwidth 99% (MHz)
CDMA	850 MHz Uplink	Low	824.73	1.447	1.2659
		Middle	836.40	1.457	1.2778
		High	848.19	1.482	1.2728
	850 MHz Downlink	Low	869.73	1.462	1.2745
		Middle	881.40	1.456	1.2746
		High	893.19	1.447	1.2725
	1900 MHz Uplink	Low	1851.25	1.445	1.2698
		Middle	1880.00	1.465	1.2778
		High	1908.75	1.446	1.2710
	1900 MHz Downlink	Low	1931.25	1.461	1.2720
		Middle	1960.00	1.448	1.2757
		High	1988.75	1.452	1.2718

Please refer to the following plots.


**GSM 850 MHz Band (Uplink)**

Low Channel (824.2 MHz)

Input

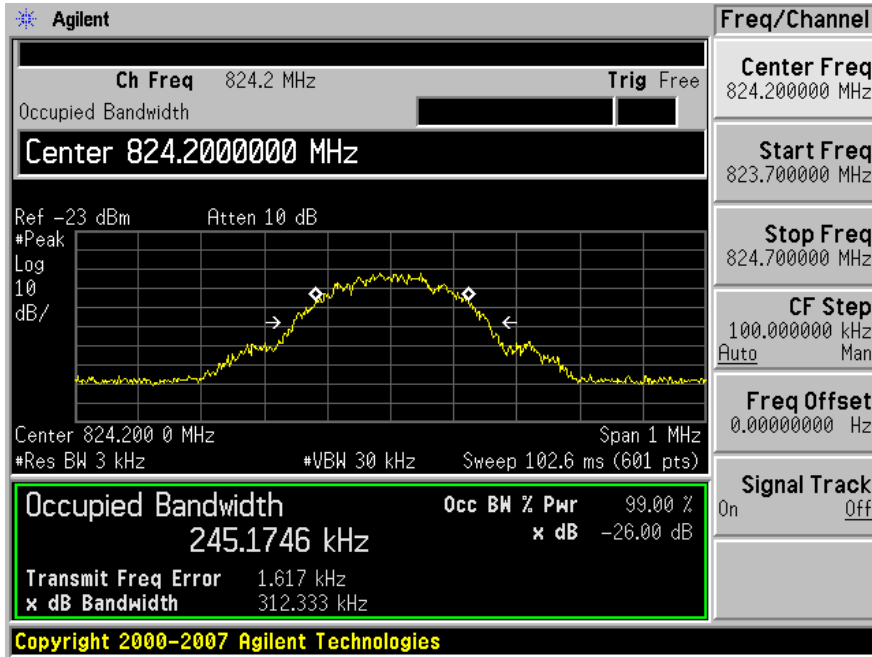


Output

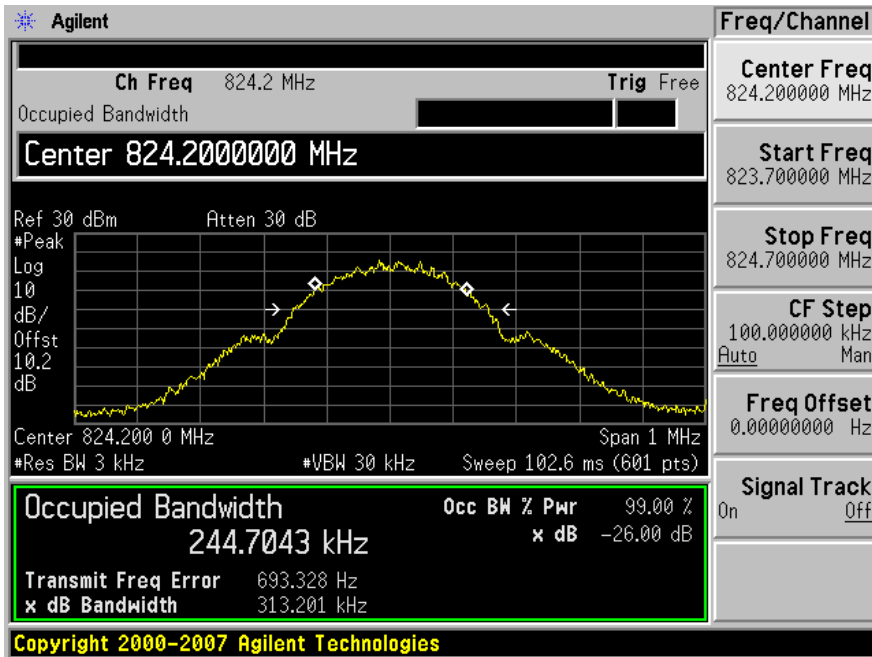


Middle Channel (836.6 MHz)

Input

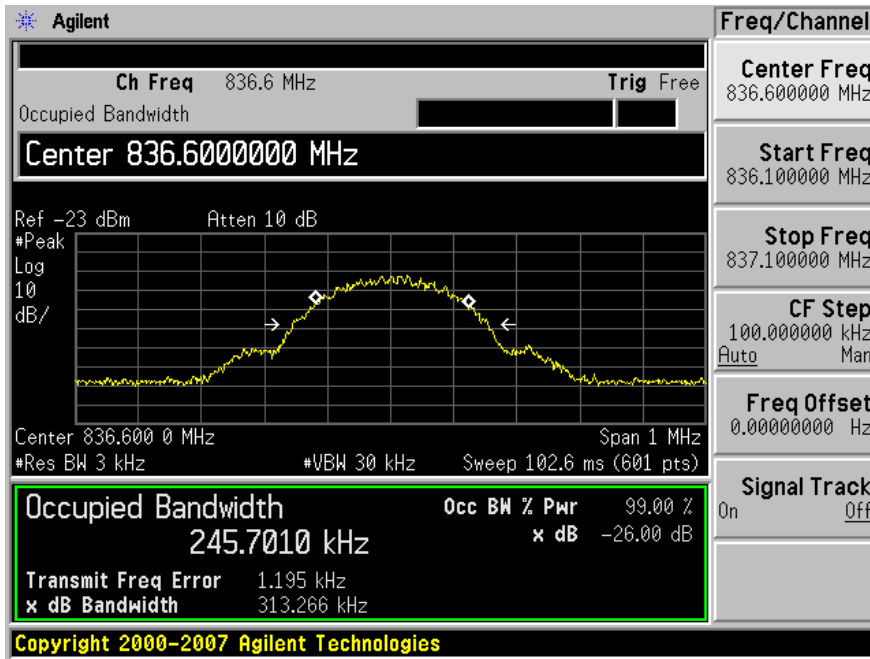


Output

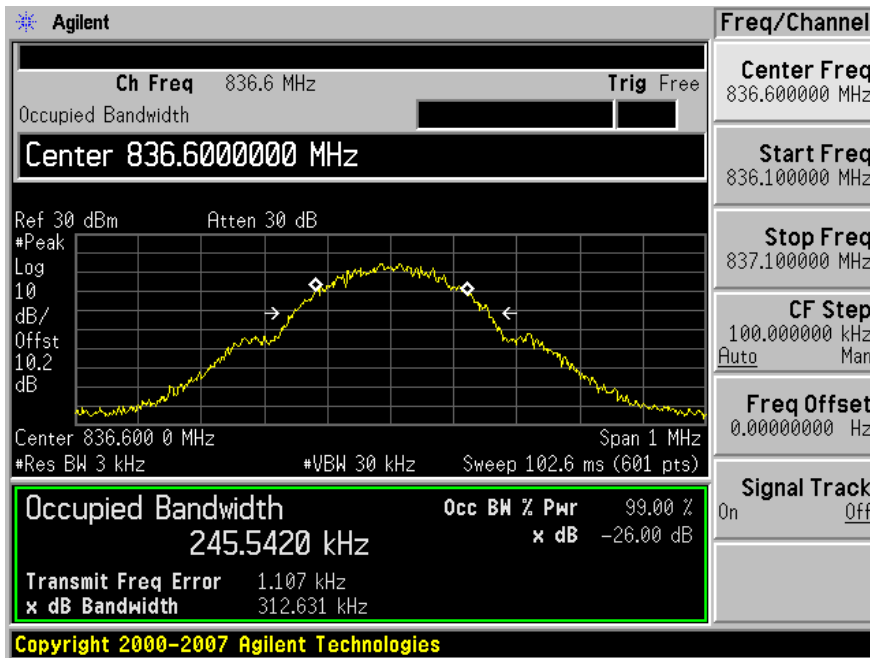



High Channel (848.8 MHz)

Input

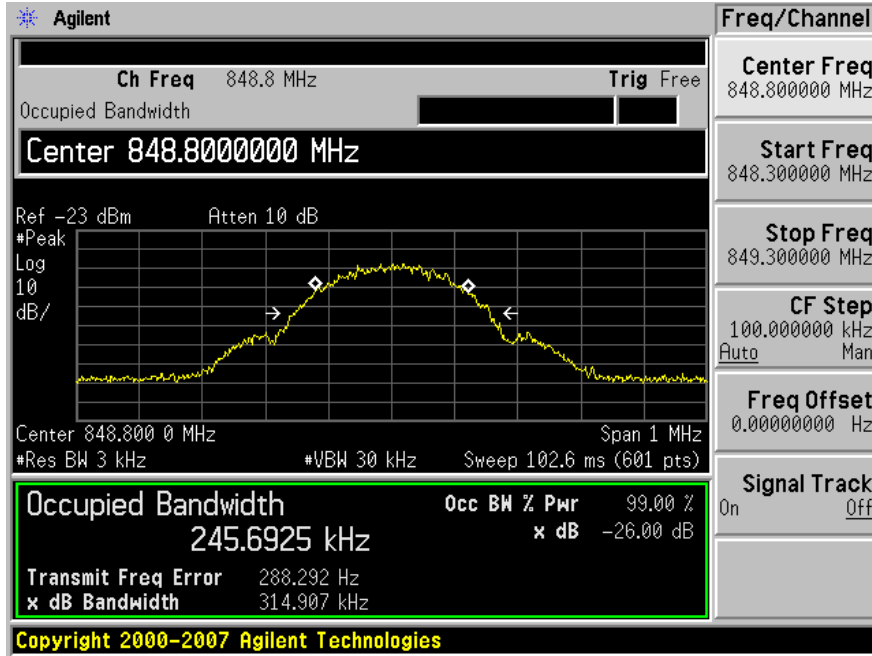


Output




**GSM 850 MHz Band (Downlink)**

Low Channel (869.2 MHz)

Input

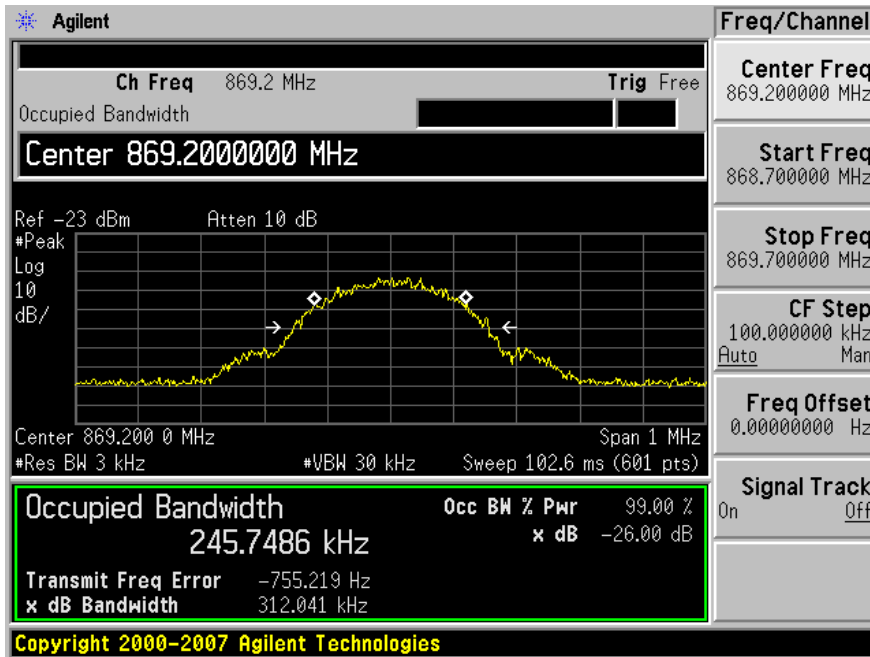


Output

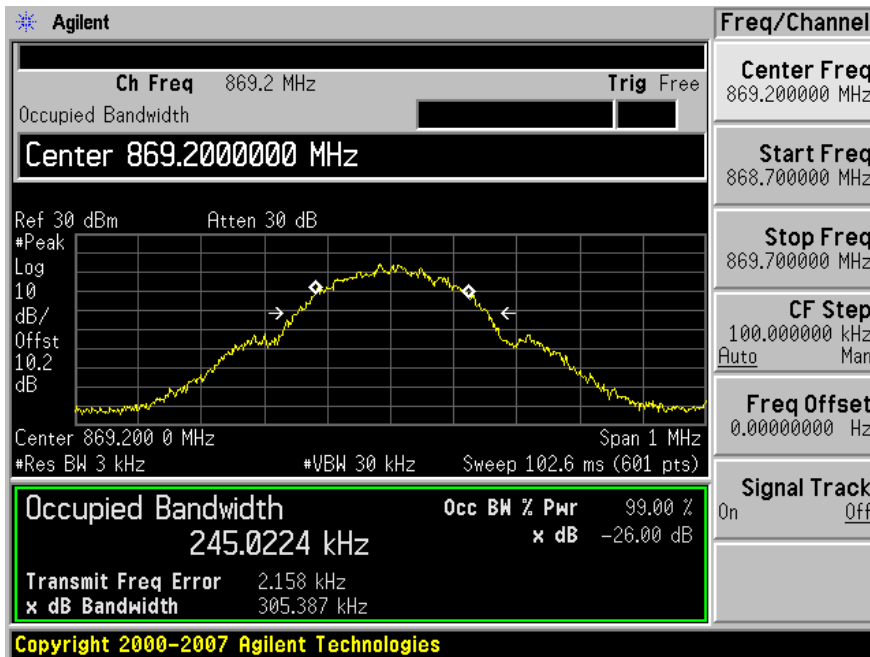


Middle Channel (881.6 MHz)

Input

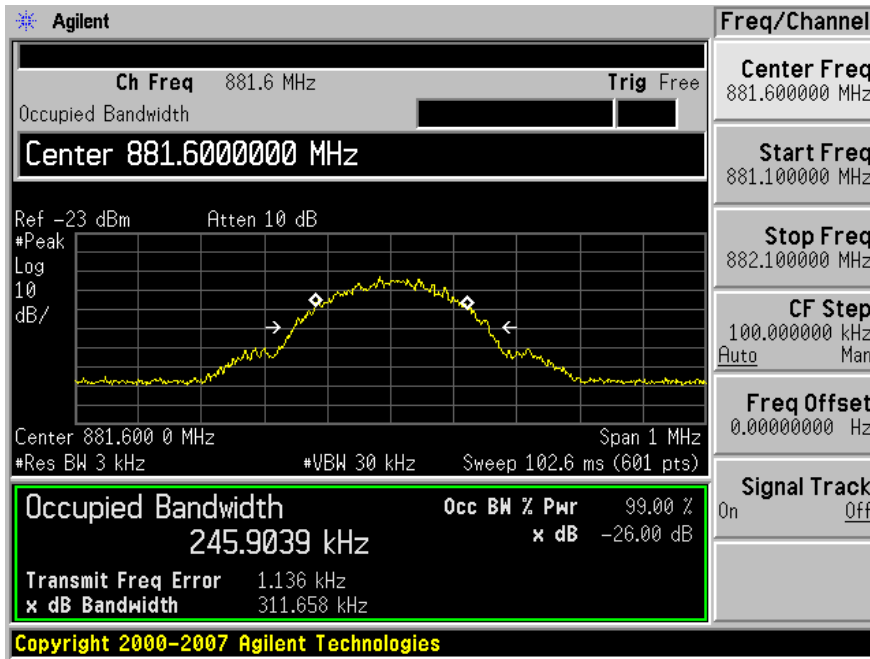


Output

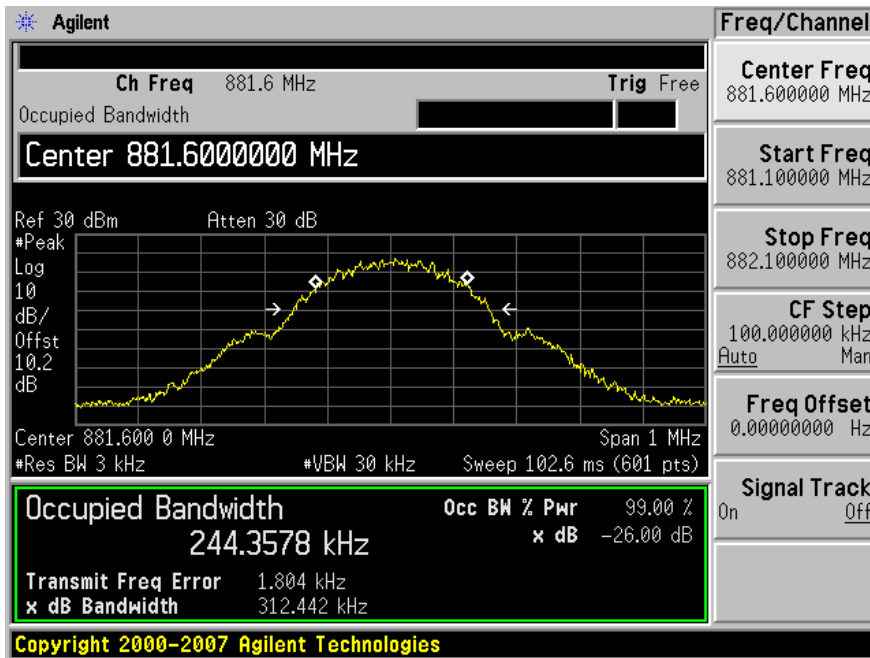


High Channel (893.8 MHz)

Input

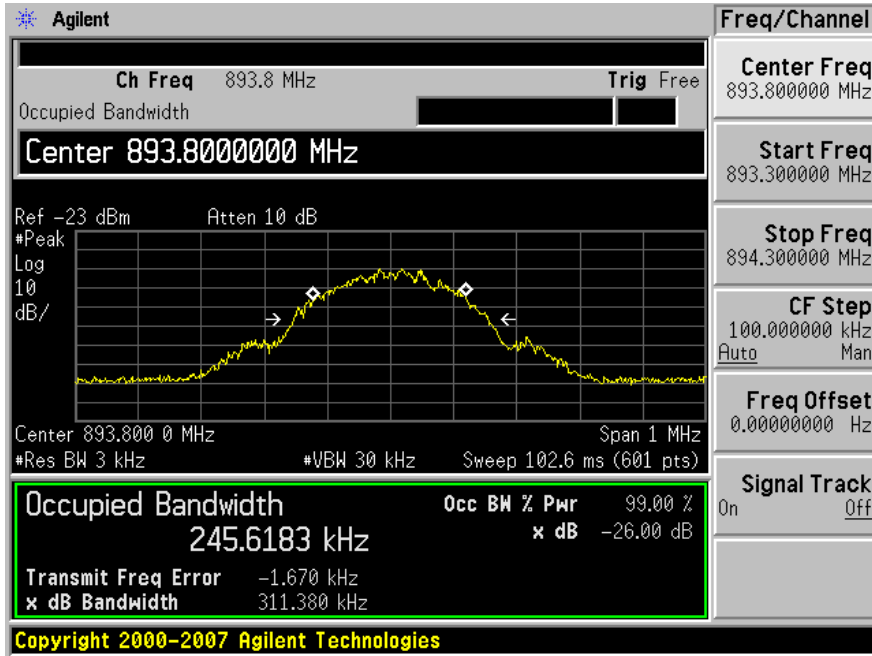


Output

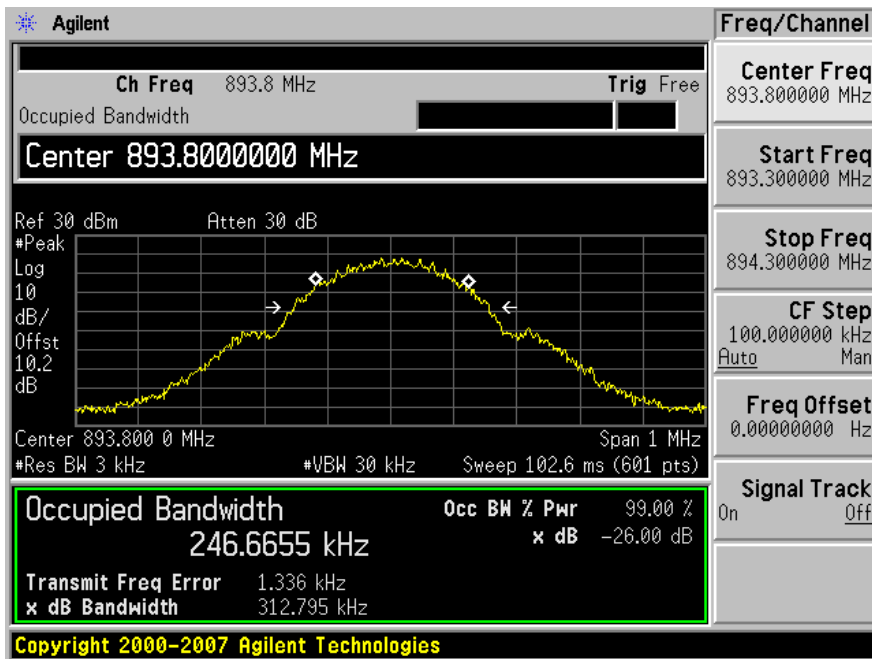


**GSM 1900 MHz Band (Uplink)**

Low Channel (1850.2 MHz)

Input

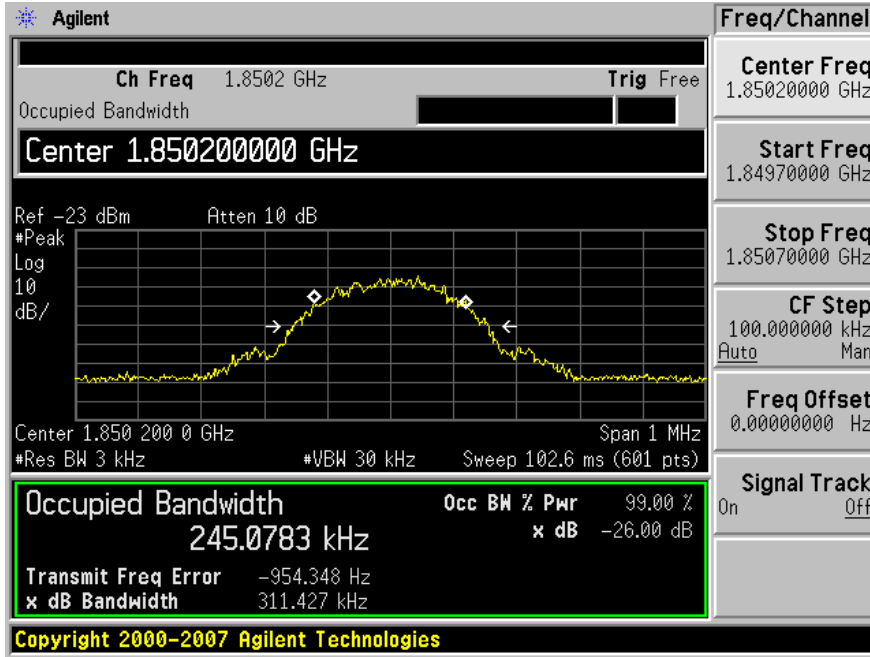


Output

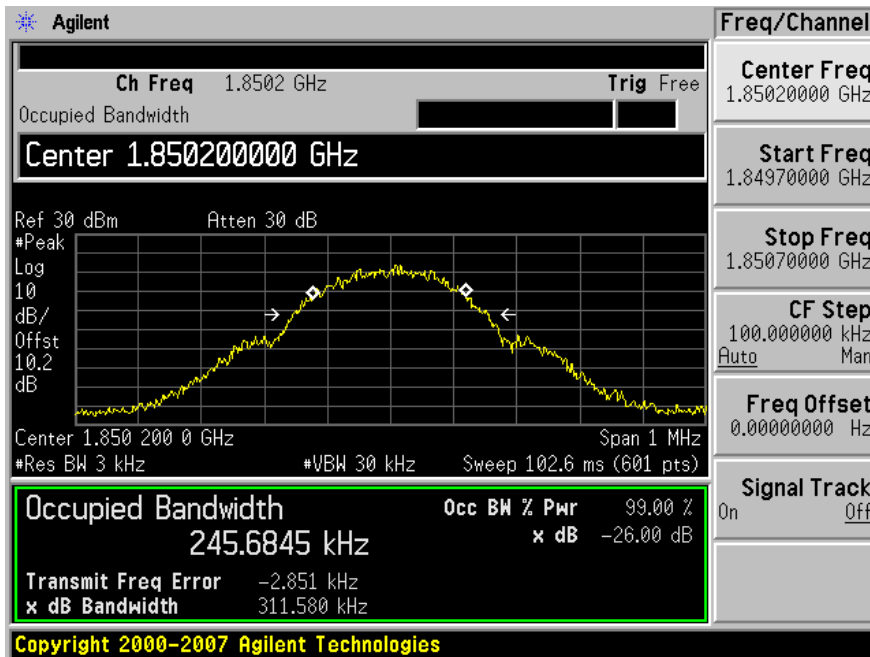


Middle Channel (1880 MHz)

Input

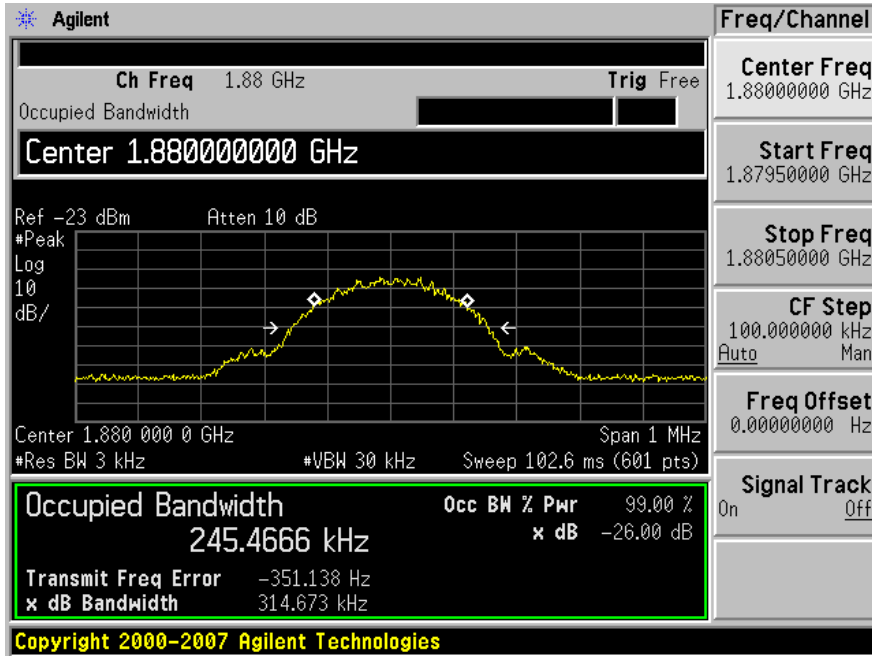


Output

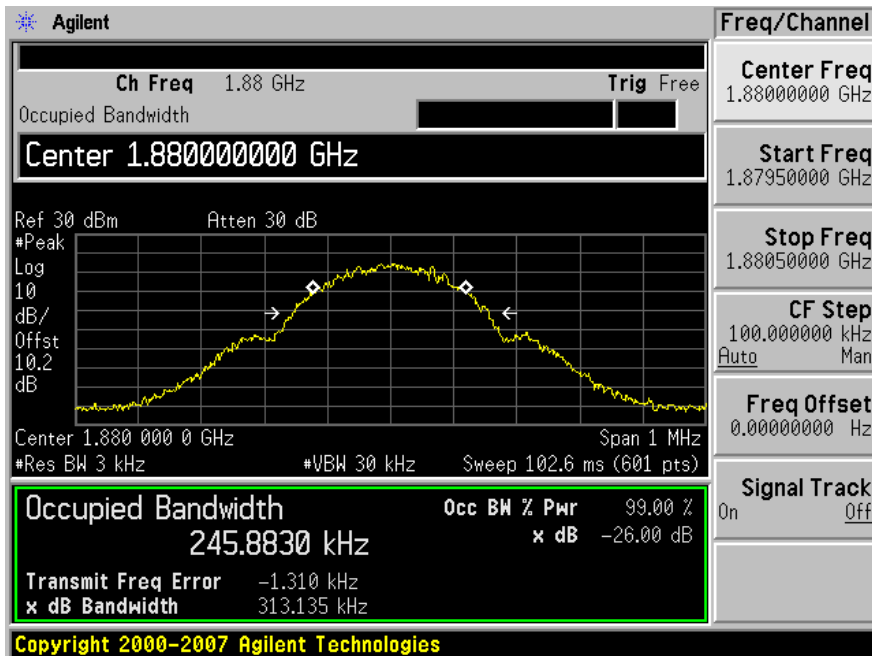


High Channel (1909.8 MHz)

Input

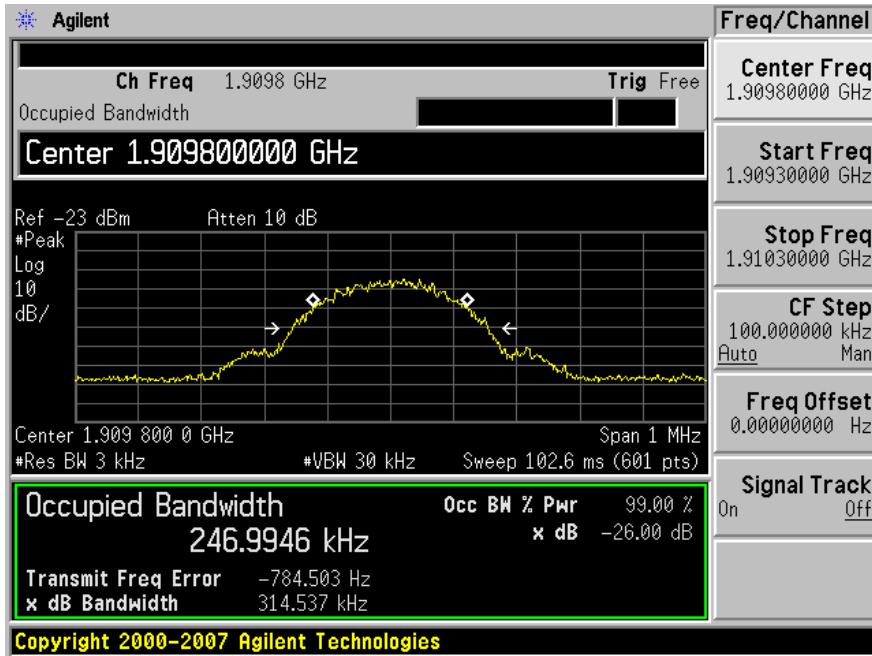

Output

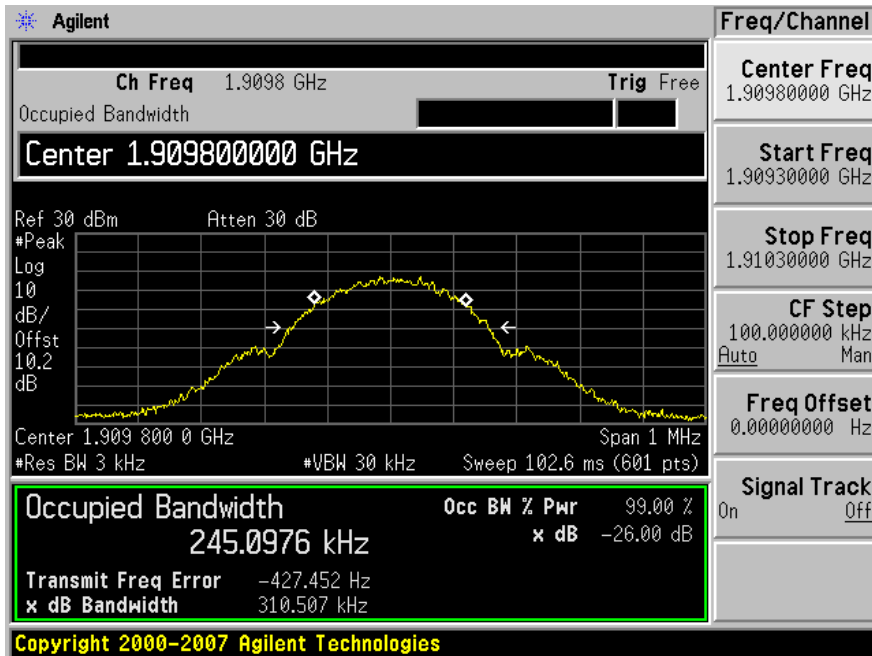


**GSM 1900 MHz Band (Downlink)**

Low Channel (1930.2 MHz)

Input



Output

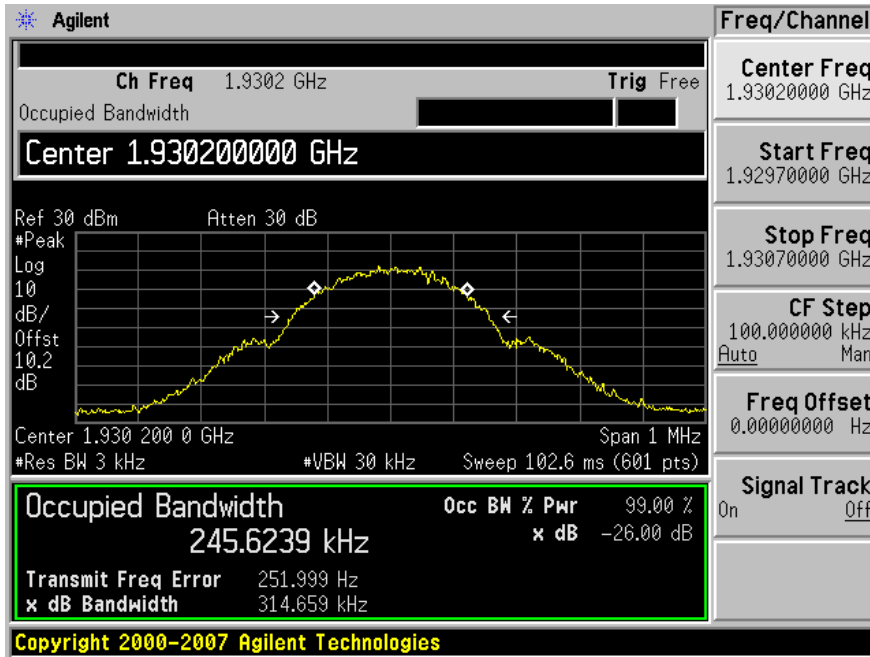




Middle Channel (1960 MHz)

Input




Output

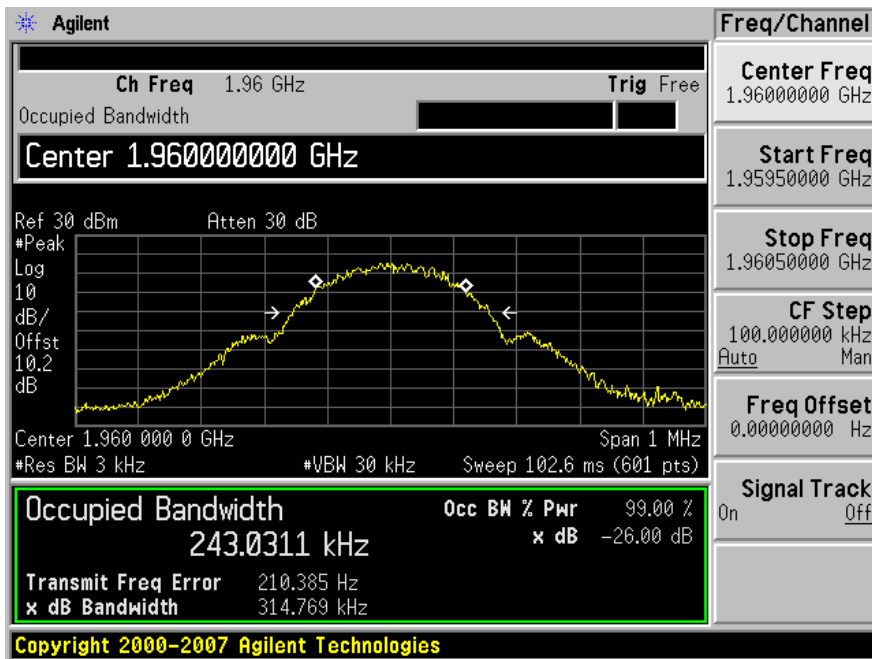


High Channel (1989.8 MHz)

Input

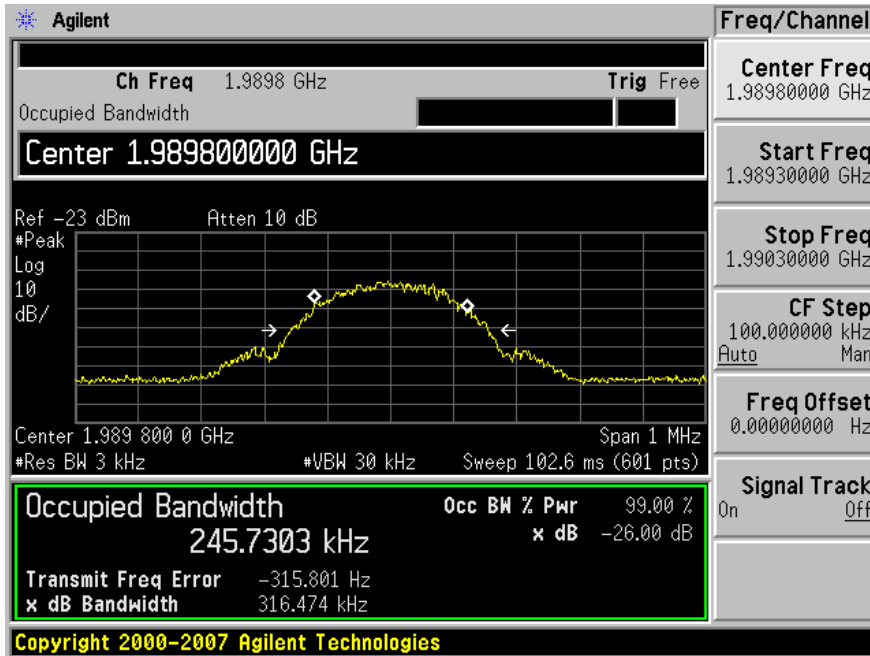


Output

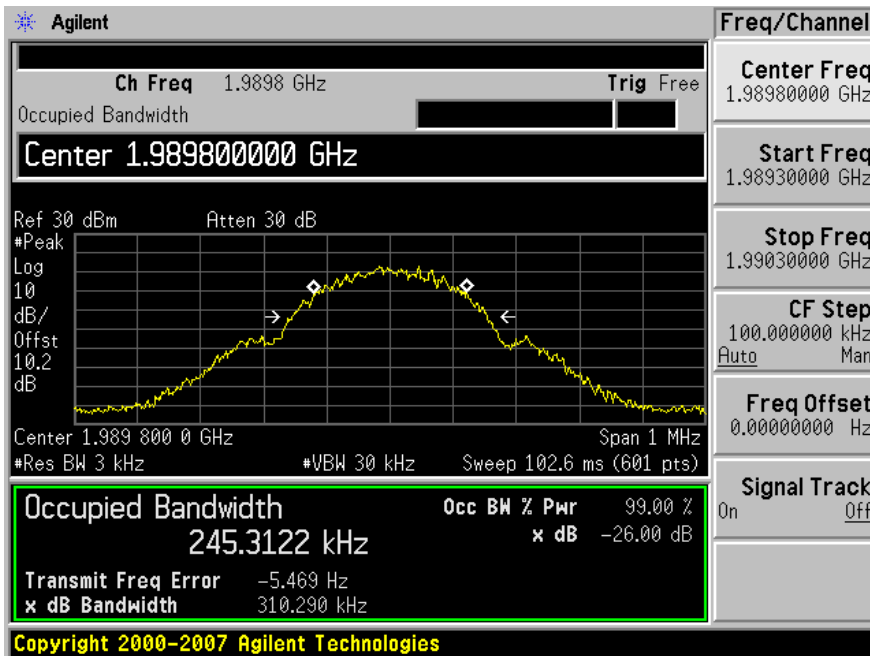


**CDMA 850 MHz Band (Uplink)**

Low Channel (824.73 MHz)

Input

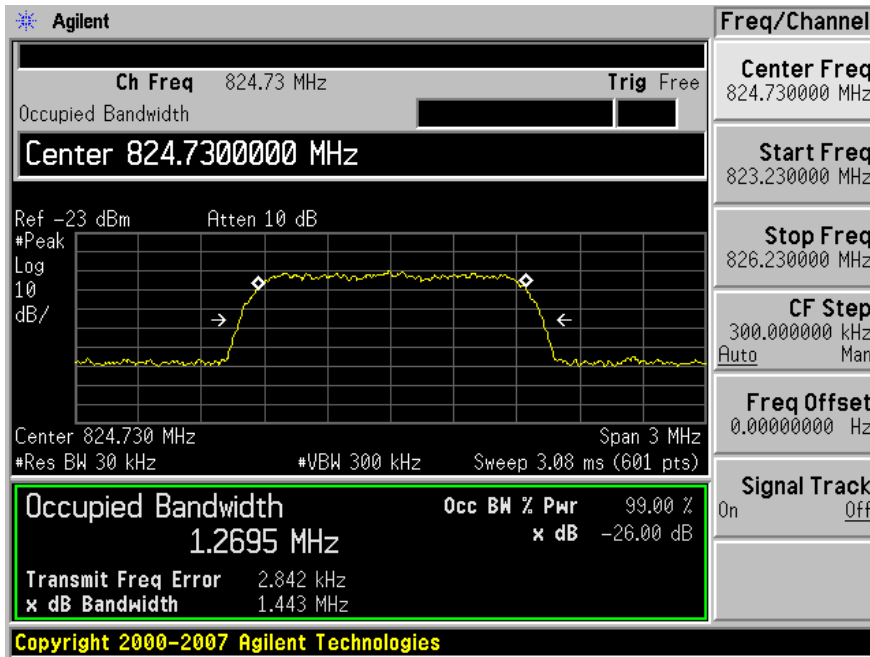


Output

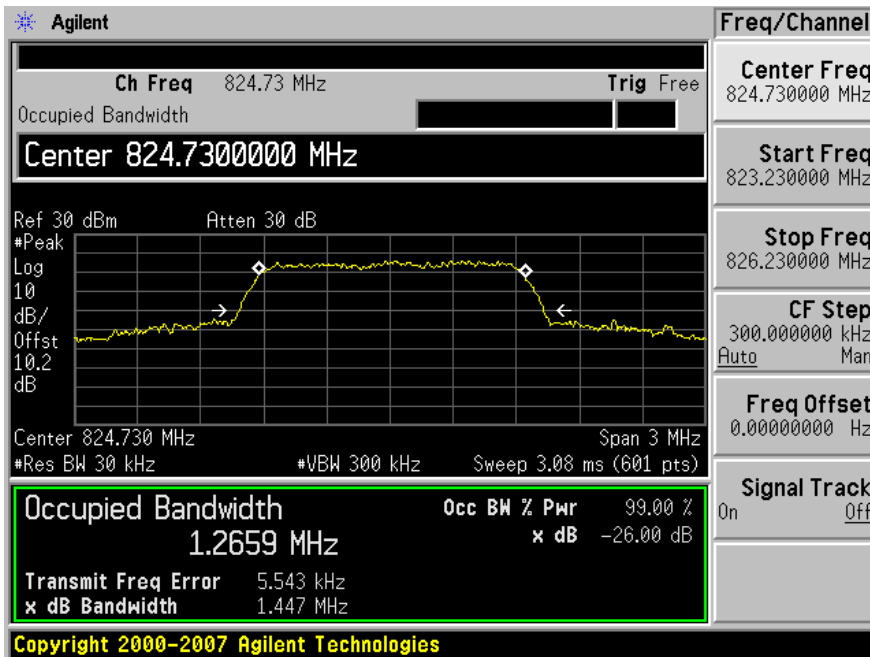


Middle Channel (836.4 MHz)

Input

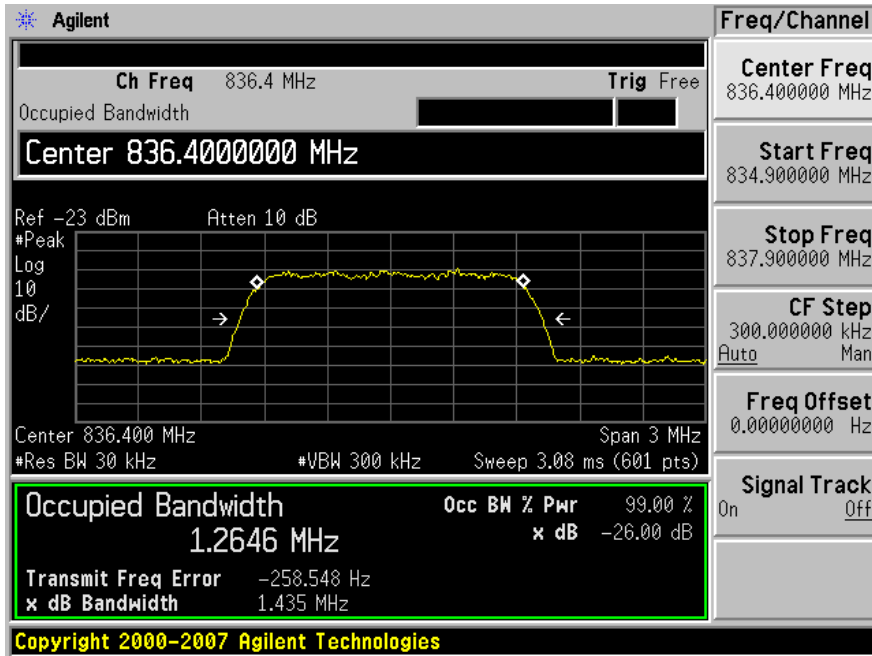


Output

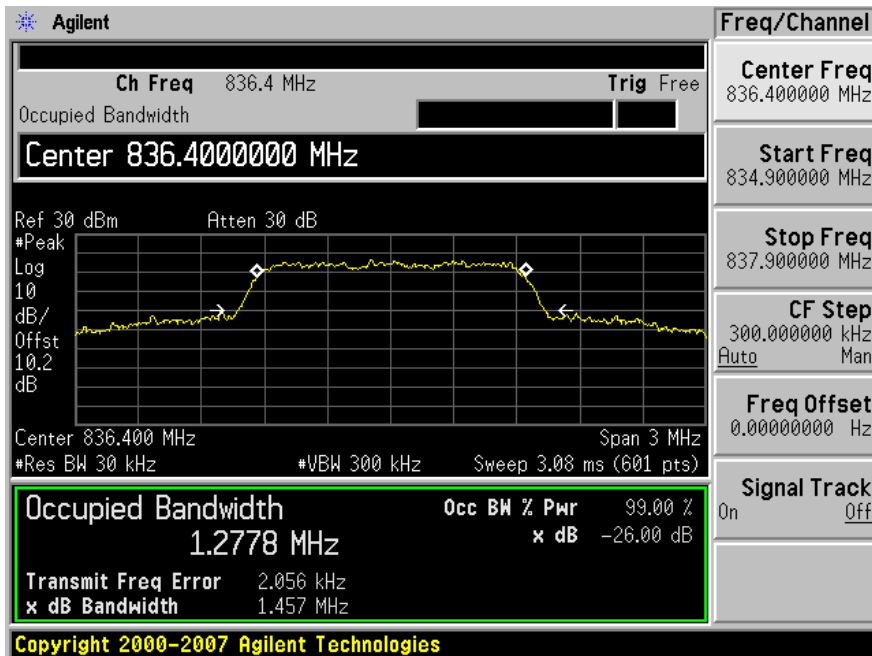


High Channel (848.19 MHz)

Input

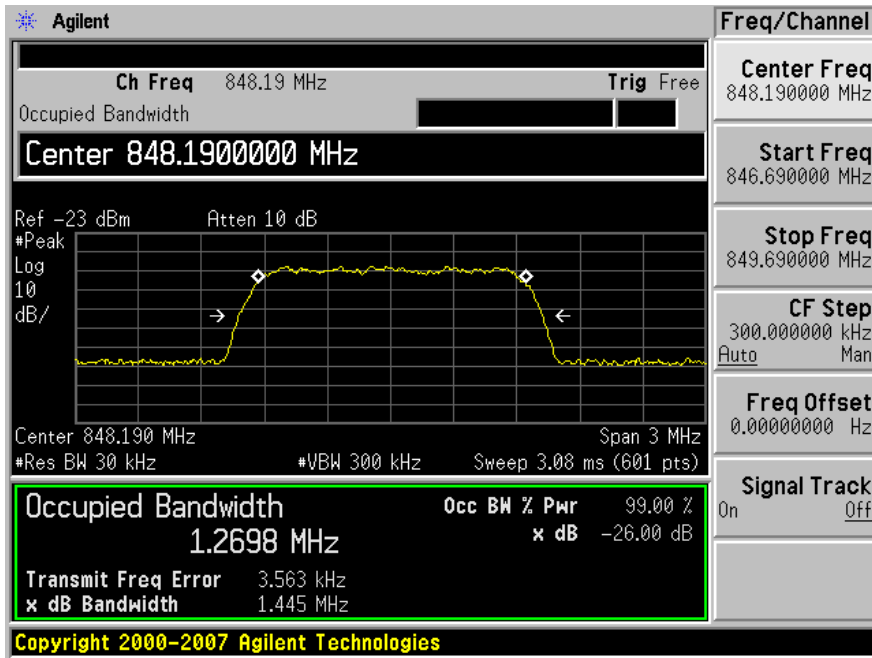


Output

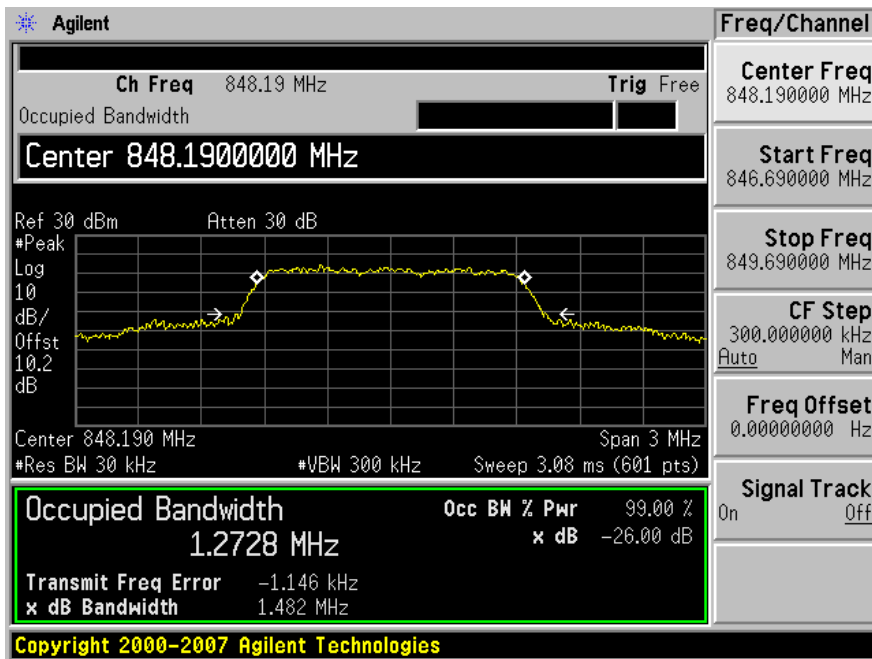


**CDMA 850 MHz band (Downlink)**

Low Channel (869.73 MHz)

Input

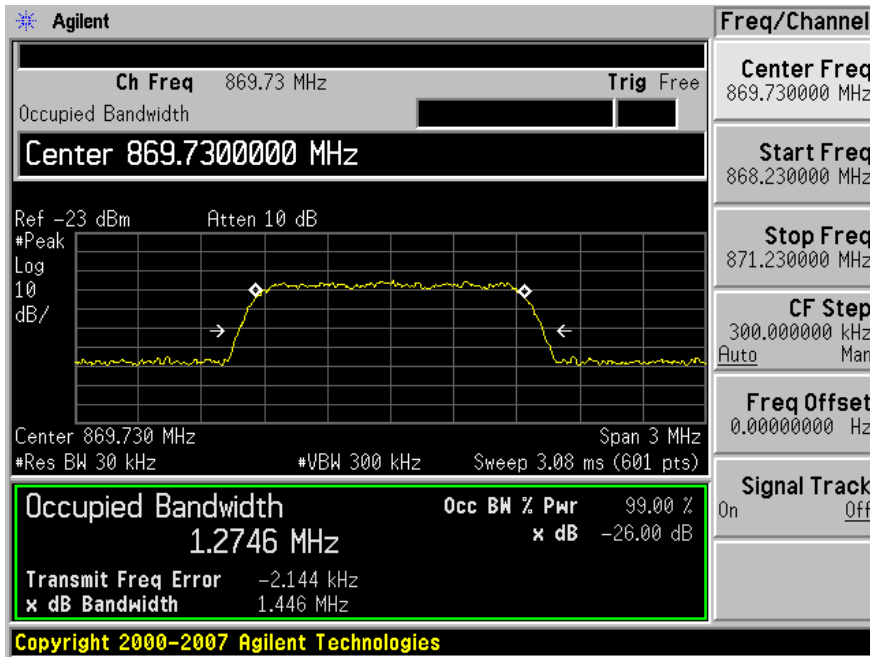


Output

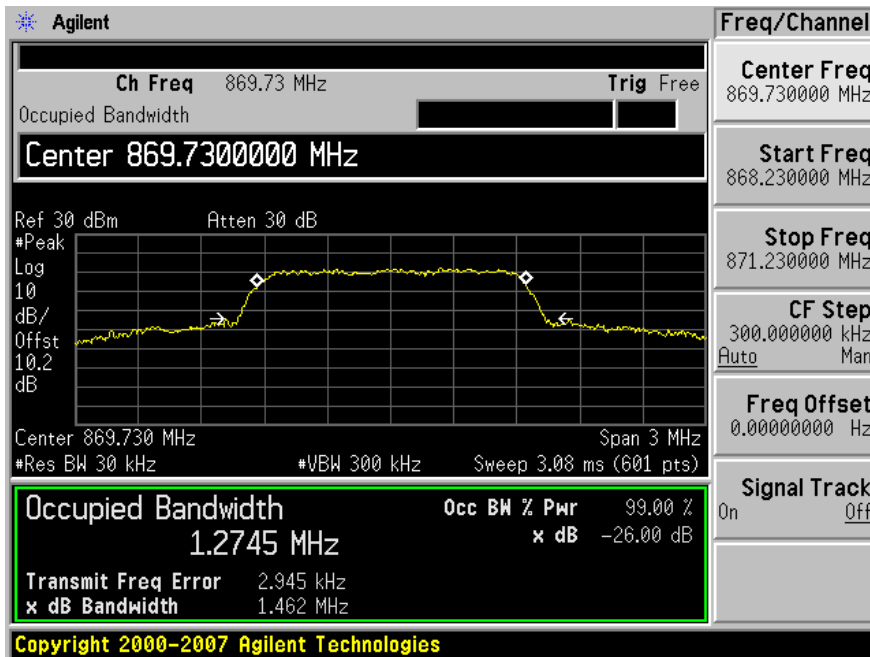


Middle Channel (881.4 MHz)

Input

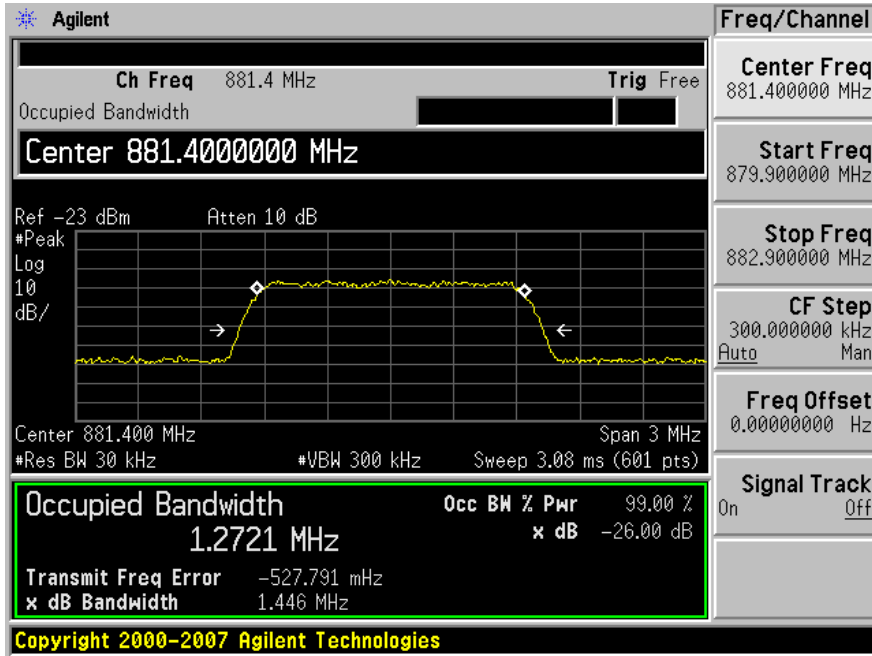


Output

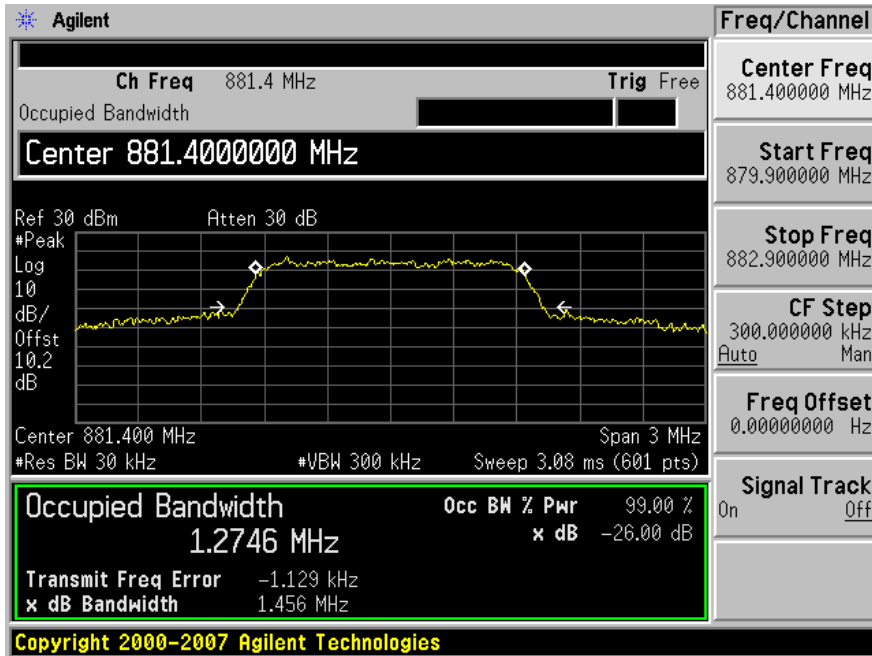


High Channel (893.19 MHz)

Input

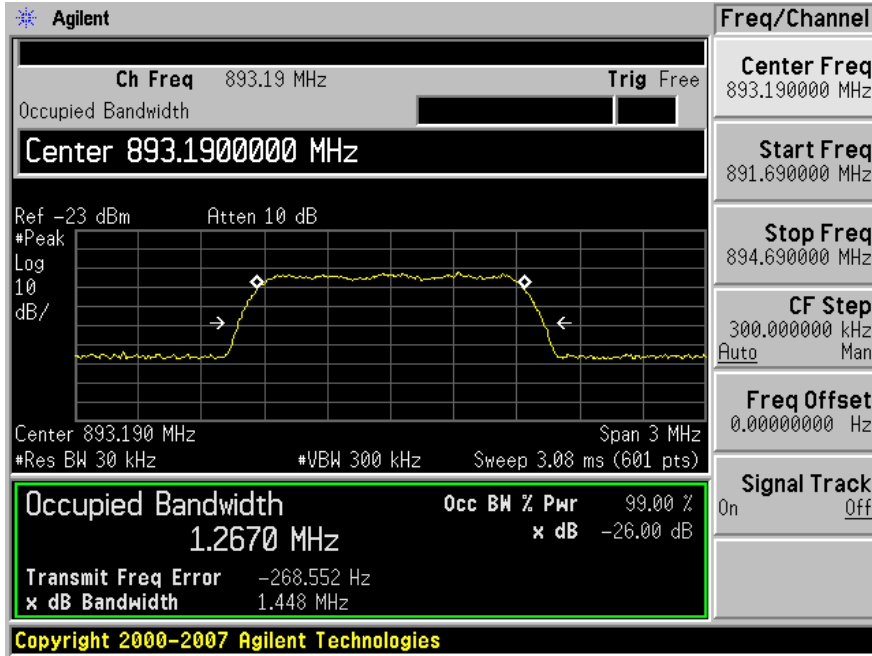

Output

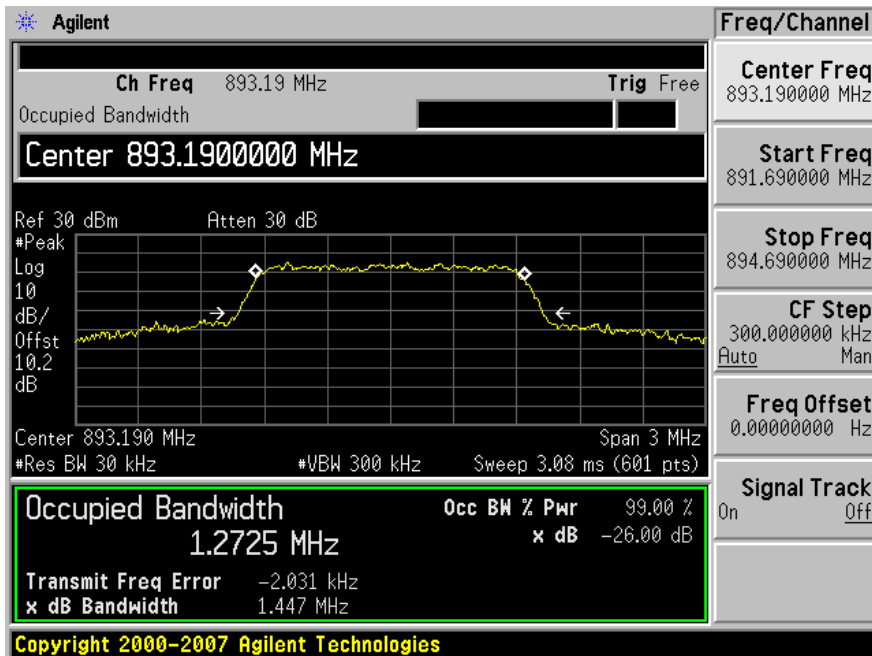





**CDMA 1900 MHz Band (Uplink)**

Low Channel (1851.25 MHz)

Input

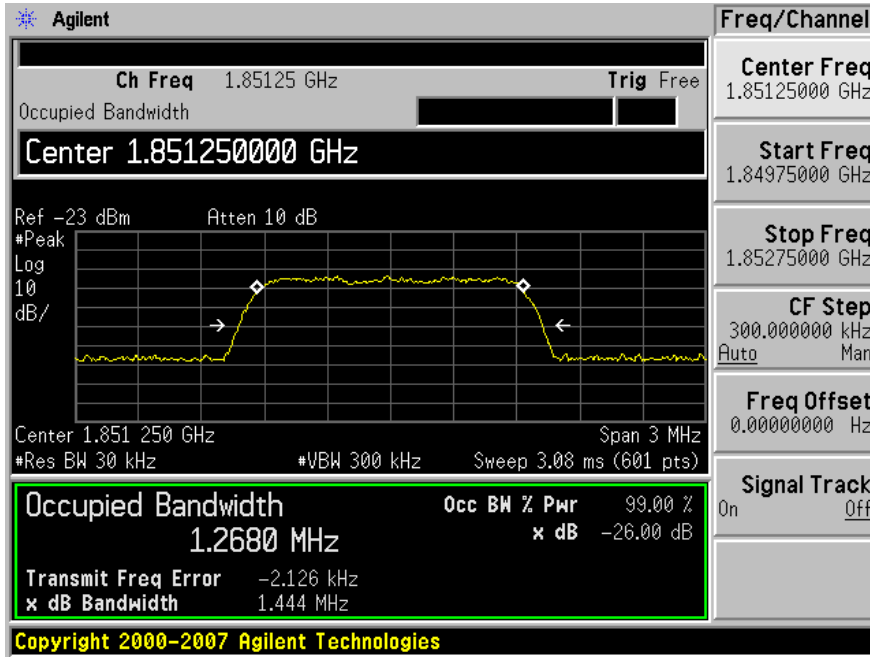


Output

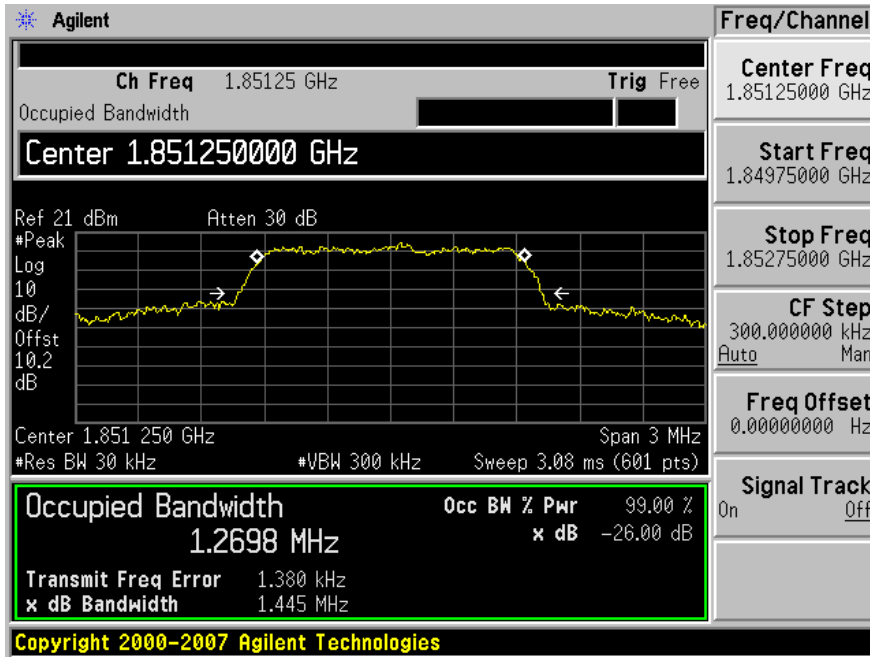


Middle Channel (1880 MHz)

Input

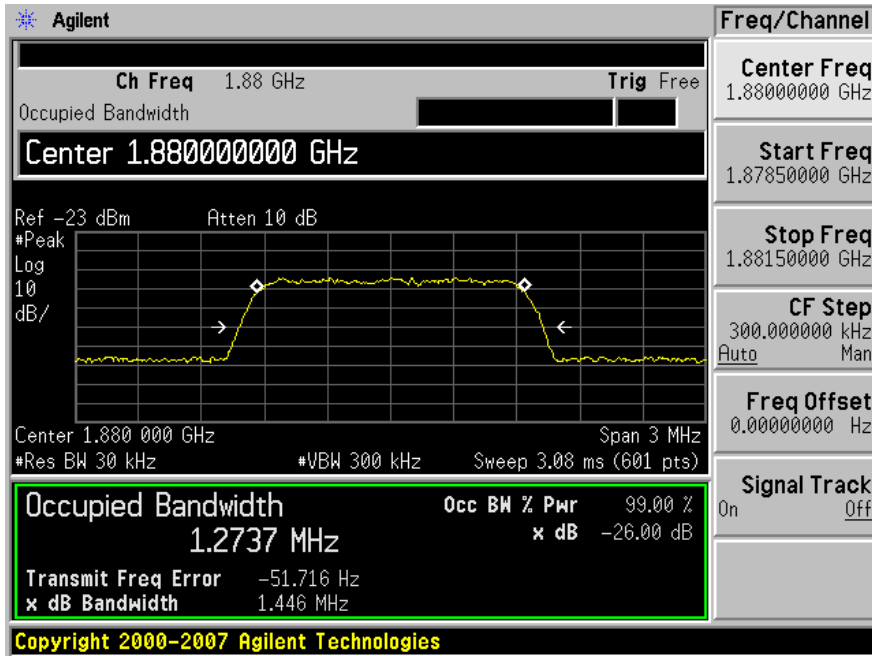


Output

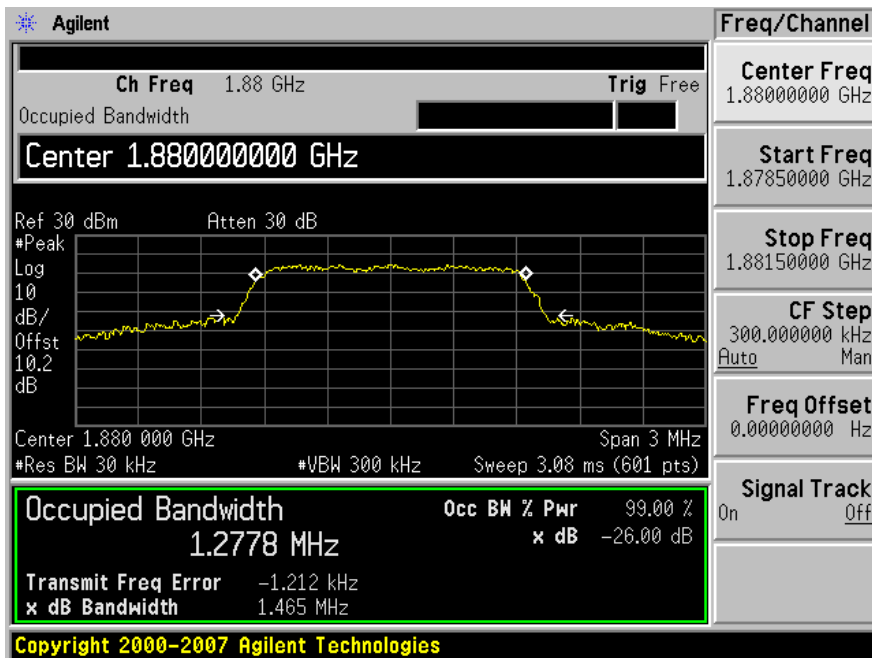


High Channel (1908.75 MHz)

Input

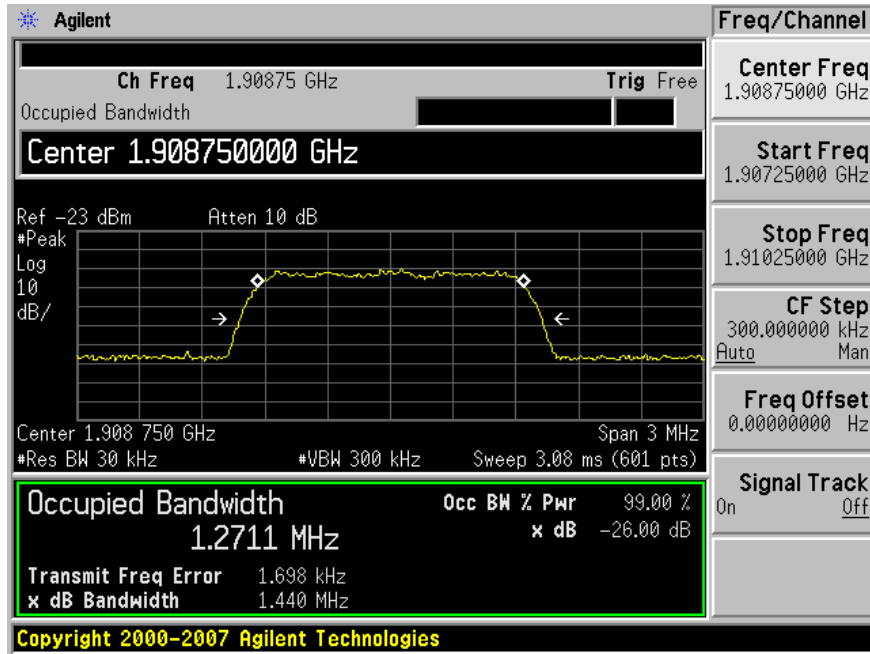


Output

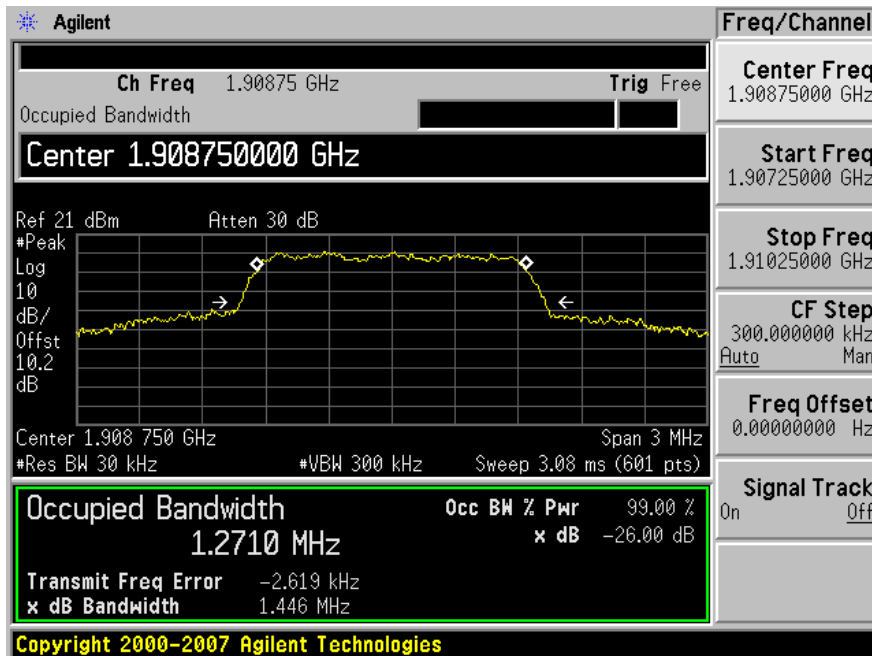


**CDMA 1900 MHz Band (Downlink)**

Low Channel (1931.25 MHz)

Input

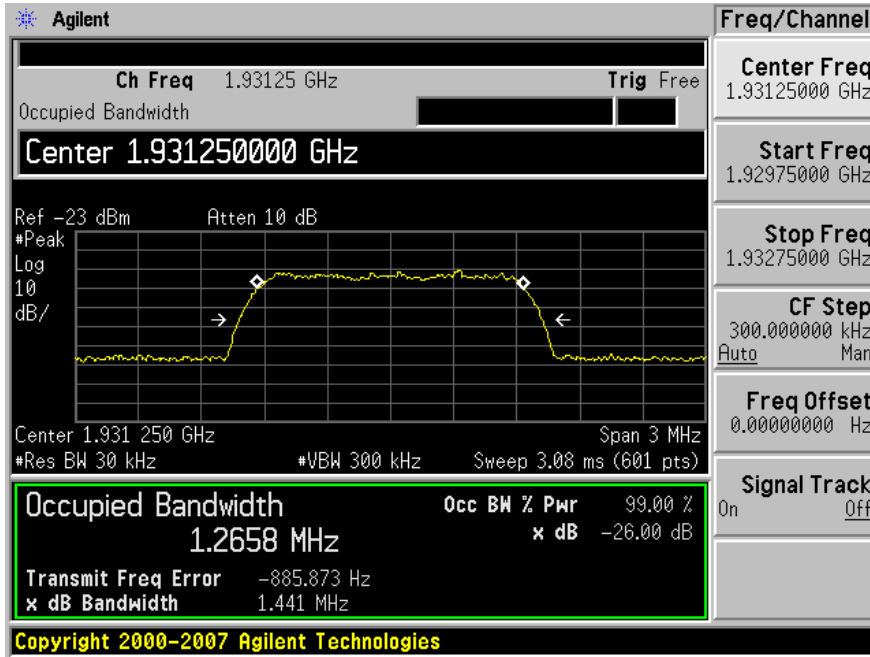


Output

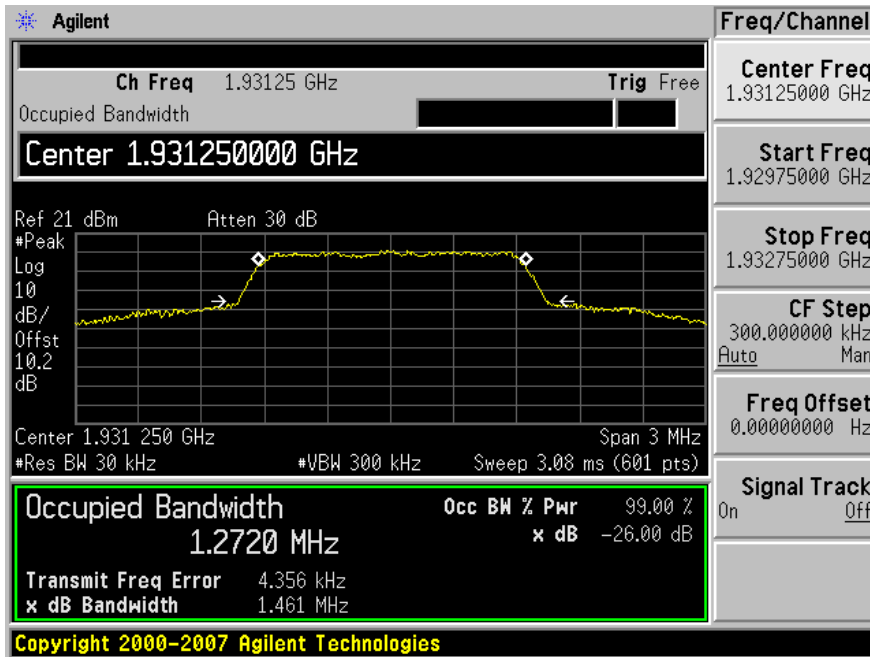


Middle Channel (1960 MHz)

Input

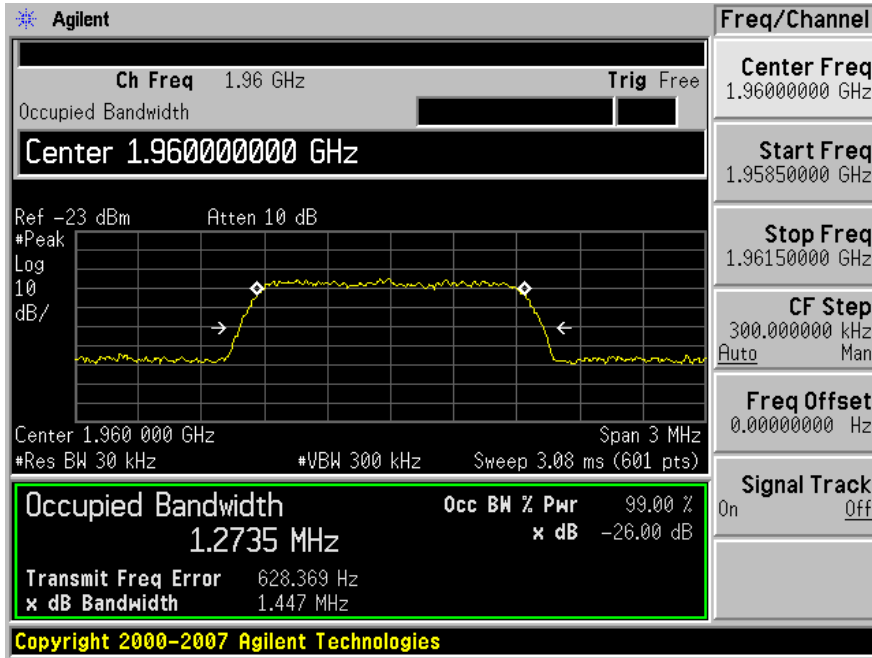


Output

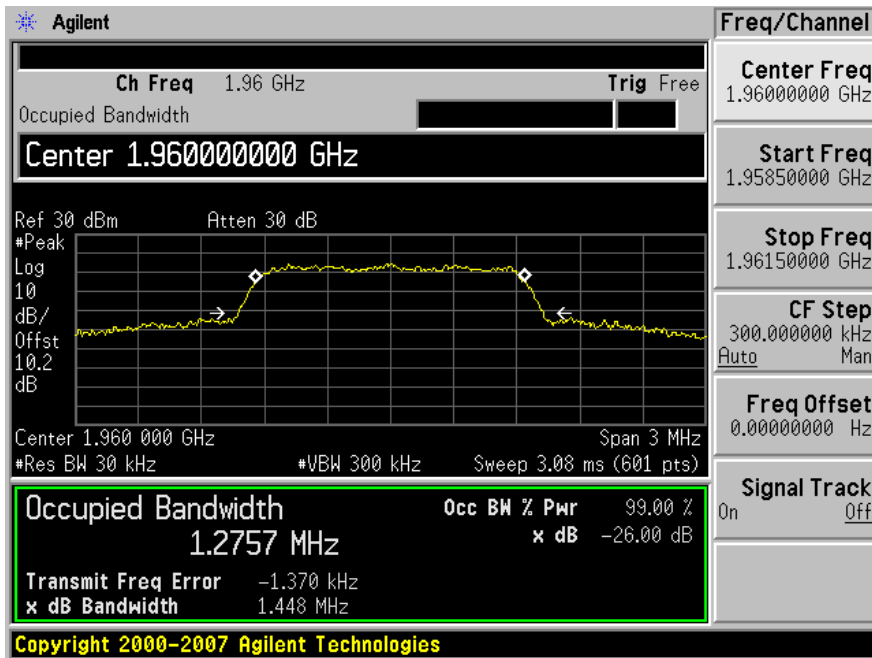


High Channel (1988.75 MHz)

Input

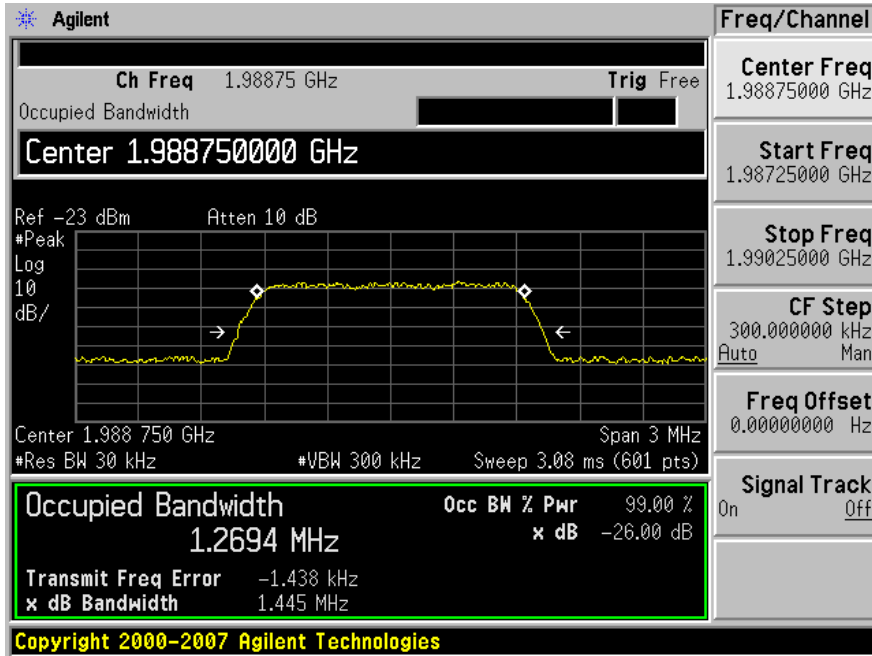

Output

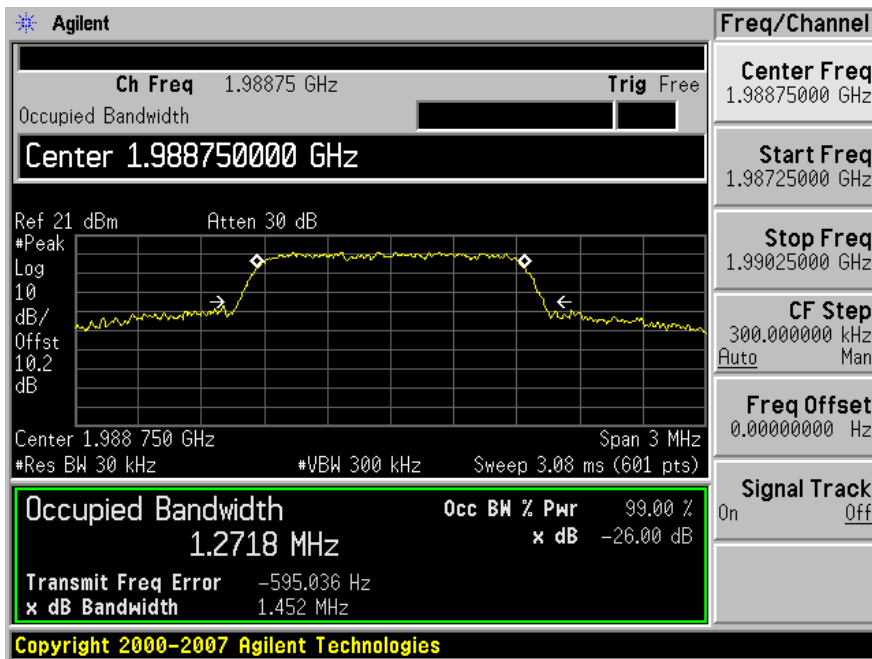

## 7 §2.1053, §22.917 & §24.238 - SPURIOUS RADIATED EMISSIONS

### 7.1 Applicable Standard

Requirements: CFR 47, § 2.1053, § 22.917. § 24.238

### 7.2 Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 log (TX Power in Watts/0.001) – the absolute level

Spurious attenuation limit in dB = 43 + 10 Log10 (power out in Watts)

### 7.3 Environmental Conditions

<b>Temperature:</b>	18~22 °C
<b>Relative Humidity:</b>	35~42 %
<b>ATM Pressure:</b>	101.1~101.7 kPa

\* The testing was performed by Jack Liu on 2009-4-29 ~ 2009-5-01

### 7.4 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
Agilent	Spectrum Analyzer	E4440A	US44303352	2009-04-28
Sunol Sciences	Antenna	JB1	A020106-1	2009-04-17
A.R.A	Horn Antenna	DRG-118/A	1132	2008-07-28
A. H. Systems	Antenna, Horn, DRG	SAS-200/571	261	2008-07-01
Rohde & Schwarz	Generator, Signal	SMIQ03	849192/0085	2008-10-14
Ducommun	Pre-Amplifier	ALN-09173030-01	988251-03R	2009-03-04
HP	Pre-Amplifier	8447D	2944A06639	2009-03-06

\* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

## 7.5 Summary of Test Results

Worst case reading as follows:

<b>Mode: GSM 850 MHz Downlink</b>			
<b>Margin (dB)</b>	<b>Frequency (MHz)</b>	<b>Polarization (Horizontal/Vertical)</b>	<b>Input Frequency</b>
-29.18	1763.2	Horizontal	881.6

<b>Mode: GSM 850 MHz Uplink</b>			
<b>Margin (dB)</b>	<b>Frequency (MHz)</b>	<b>Polarization (Horizontal/Vertical)</b>	<b>Input Frequency</b>
-39.37	1673.2	Horizontal	836.6

<b>Mode: GSM 1900 MHz Downlink</b>			
<b>Margin (dB)</b>	<b>Frequency (MHz)</b>	<b>Polarization (Horizontal/Vertical)</b>	<b>Input Frequency</b>
-39.10	3920	Vertical	1960

<b>Mode: GSM 1900 MHz Uplink</b>			
<b>Margin (dB)</b>	<b>Frequency (MHz)</b>	<b>Polarization (Horizontal/Vertical)</b>	<b>Input Frequency</b>
-31.88	3760	Vertical	1880

<b>Mode: CDMA 850 MHz Downlink</b>			
<b>Margin (dB)</b>	<b>Frequency (MHz)</b>	<b>Polarization (Horizontal/Vertical)</b>	<b>Input Frequency</b>
-18.83	1322	Horizontal	881.4

<b>Mode: CDMA 850 MHz Uplink</b>			
<b>Margin (dB)</b>	<b>Frequency (MHz)</b>	<b>Polarization (Horizontal/Vertical)</b>	<b>Input Frequency</b>
-9.99	5018.4	Vertical	836.4

<b>Mode: CDMA 1900 MHz Downlink</b>			
<b>Margin (dB)</b>	<b>Frequency (MHz)</b>	<b>Polarization (Horizontal/Vertical)</b>	<b>Input Frequency</b>
-28.56	3920	Vertical	1960

<b>Mode: CDMA 1900 MHz Uplink</b>			
<b>Margin (dB)</b>	<b>Frequency (MHz)</b>	<b>Polarization (Horizontal/Vertical)</b>	<b>Input Frequency</b>
-24.32	3760	Vertical	1880



## 7.6 Test Results

### GSM 850 MHz band Downlink

Input frequency = 881.6 MHz

Indicated		Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Cord. (dB)	Cable Loss (dB)	Absolute Level (dBm)		
1763.2	59.04	103	100	H	1763.2	-51.12	9.3	0.36	-42.18	-13	-29.18
1763.2	57.44	18	100	V	1763.2	-55.11	9.3	0.36	-46.17	-13	-33.17

### GSM 850 MHz band Uplink

Input frequency = 836.6 MHz

Indicated		Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Cord. (dB)	Cable Loss (dB)	Absolute Level (dBm)		
1673.2	49.22	201	100	H	1673.2	-61.31	9.3	0.36	-52.37	-13	-39.37
1673.2	48.79	13	150	V	1673.2	-64.62	9.3	0.36	-55.68	-13	-42.68

### GSM 1900 MHz band Downlink

Input frequency = 1960 MHz

Indicated		Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Cord. (dB)	Cable Loss (dB)	Absolute Level (dBm)		
3920	40.72	200	156	V	3920	-62.30	10.8	0.6	-52.10	-13	-39.10
3920	40.61	136	240	H	3920	-64.38	10.8	0.6	-54.18	-13	-41.18

### GSM 1900 MHz band Uplink

Input frequency = 1880 MHz

Indicated		Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Cord. (dB)	Cable Loss (dB)	Absolute Level (dBm)		
3760	47.95	349	100	V	3760	-54.90	10.6	0.58	-44.88	-13	-31.88
3760	49.18	334	131	H	3760	-55.97	10.6	0.58	-45.95	-13	-32.95

**CDMA 850 MHz band Downlink**

Input frequency = 881.4 MHz

Indicated		Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Cord. (dB)	Cable Loss (dB)	Absolute Level (dBm)		
1322.0	74.15	167	168	H	1322.0	-38.92	7.4	0.31	-31.83	-13	-18.83
1322.0	72.00	108	100	V	1322.0	-42.47	7.4	0.31	-35.38	-13	-22.38
2644.2	58.49	202	100	V	2644.2	-46.44	9.2	0.45	-37.69	-13	-24.69
4407.0	51.82	297	141	V	4407.0	-51.05	11.1	0.63	-40.58	-13	-27.58
2644.2	56.60	193	100	H	2644.2	-49.89	9.2	0.45	-41.14	-13	-28.14
1762.8	58.81	106	100	H	1762.8	-51.35	9.3	0.36	-42.41	-13	-29.41
4407.0	48.82	221	100	H	4407.0	-54.29	11.1	0.63	-43.82	-13	-30.82
1762.8	57.33	18	100	V	1762.8	-55.22	9.3	0.36	-46.28	-13	-33.28

**CDMA 850 MHz band Uplink**

Input frequency = 836.4 MHz

Indicated		Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Cord. (dB)	Cable Loss (dB)	Absolute Level (dBm)		
5018.4	67.83	198	174	V	5018.4	-32.90	10.6	0.69	-22.99	-13	-9.99
5018.4	66.41	216	220	H	5018.4	-33.16	10.6	0.69	-23.25	-13	-10.25
2509.2	56.92	0	109	V	2509.2	-49.13	9.4	0.44	-40.17	-13	-27.17
2509.2	52.99	194	111	H	2509.2	-53.85	9.4	0.44	-44.89	-13	-31.89
4182.0	46.57	326	122	V	4182.0	-55.76	10.9	0.61	-45.47	-13	-32.47
4182.0	41.41	0	150	H	4182.0	-62.26	10.9	0.61	-51.97	-13	-38.97
1672.8	48.71	56	150	H	1672.8	-61.82	9.3	0.36	-52.88	-13	-39.88
1672.8	49.35	20	142	V	1672.8	-64.06	9.3	0.36	-55.12	-13	-42.12

**CDMA 1900 MHz band Downlink**

Input frequency = 1960 MHz

Indicated		Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Cord. (dB)	Cable Loss (dB)	Absolute Level (dBm)		
3920	51.26	205	167	V	3920	-51.76	10.8	0.6	-41.56	-13	-28.56
3920	47.7	139	220	H	3920	-57.29	10.8	0.6	-47.09	-13	-34.09

**CDMA 1900 MHz band Uplink**

Input frequency = 1880 MHz

Indicated		Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Cord. (dB)	Cable Loss (dB)	Absolute Level (dBm)		
3760	55.51	3	150	V	3760	-47.34	10.6	0.58	-37.32	-13	-24.32
3760	55.63	309	158	H	3760	-49.52	10.6	0.58	-39.50	-13	-26.50

## 8 §2.1051, §22.917& §24.238- SPURIOUS EMISSIONS AT ANTENNA TERMINALS

### 8.1 Applicable Standard

Requirements: CFR 47, § 2.1051, § 22.917, § 24.238.

The spectrum shall be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1057.

§ 22.917: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB

### 8.2 Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10<sup>th</sup> harmonic.

### 8.3 Environmental Conditions

Temperature:	18~22 °C
Relative Humidity:	35~42 %
ATM Pressure:	101.1~101.7kPa

\* The testing was performed by Jack Liu on 2009-4-29 ~ 2009-5-1

### 8.4 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
Rohde & Schwarz	Generator, Signal	SMIQ03	849192/0085	2008-10-14
Agilent	Analyzer, Spectrum	E4440A	US45303156	2008-05-31
HP	Generator, Signal	83650B	3641A00276	2008-05-28


\* **Statement of Traceability: BA CL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

### 8.5 Test Results


Please refer to the hereinafter plots.

**GSM 850 MHz band Low channel Uplink:**

Input

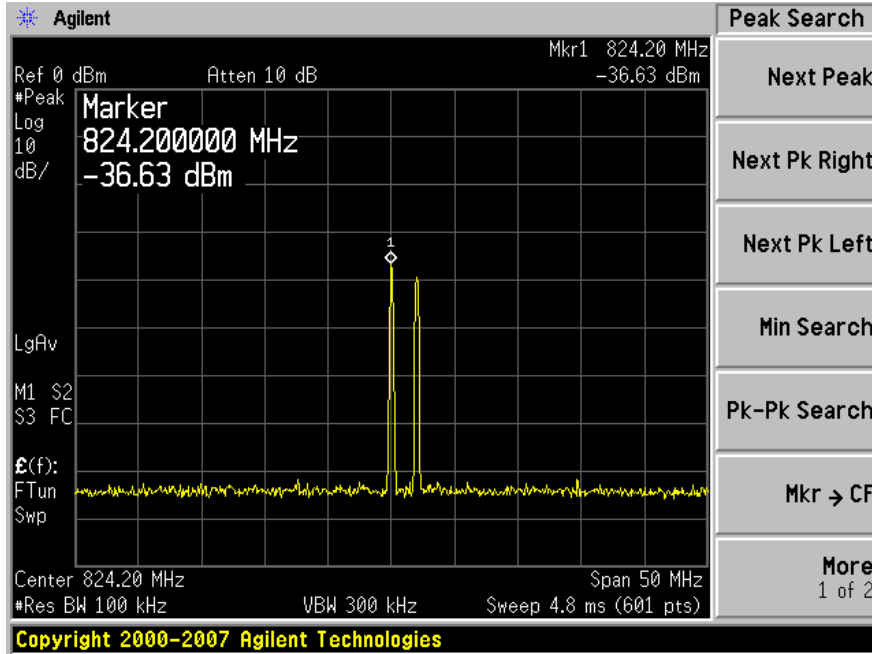


Output

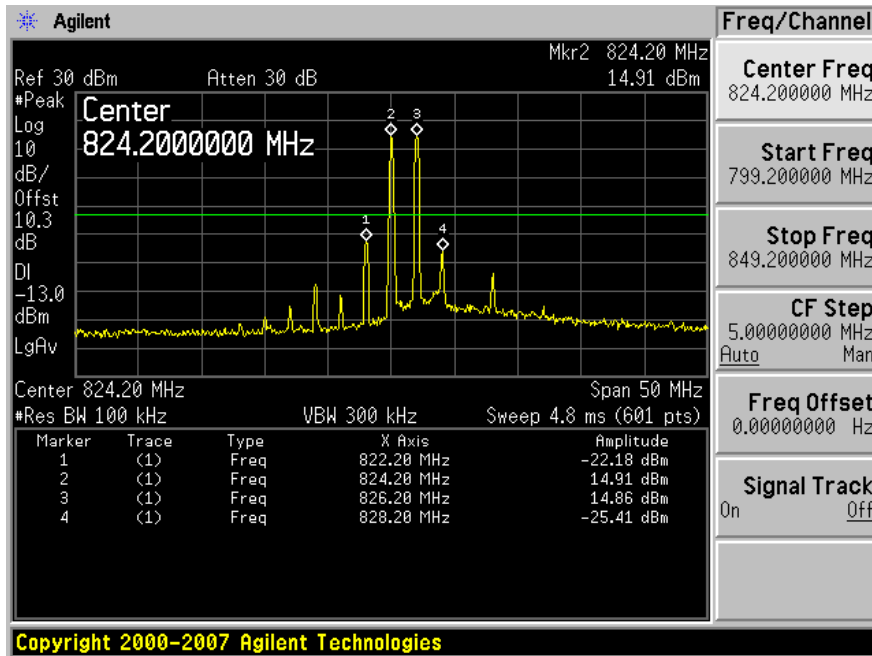


**GSM 850 MHz band High channel Uplink:**

Input

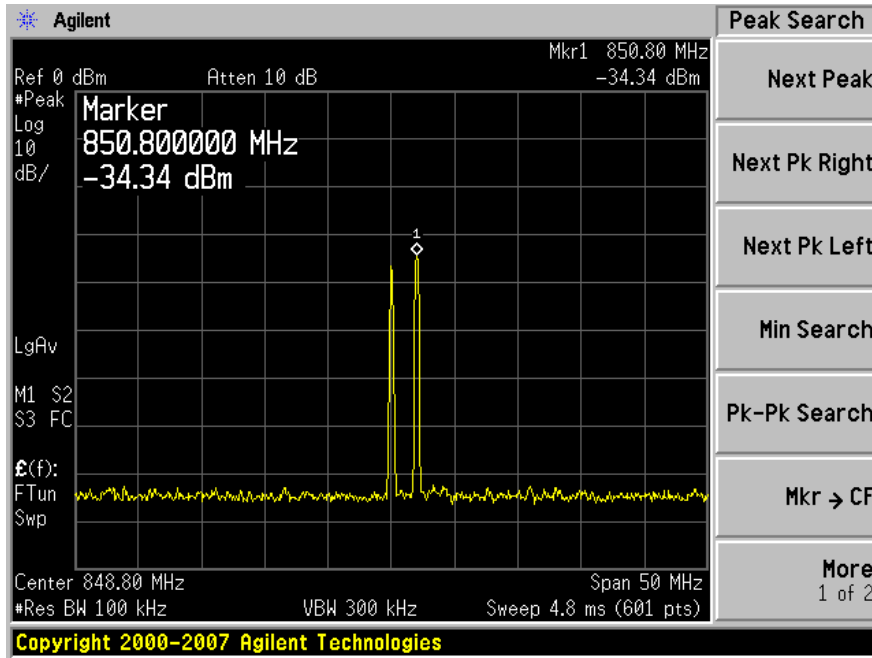


Output

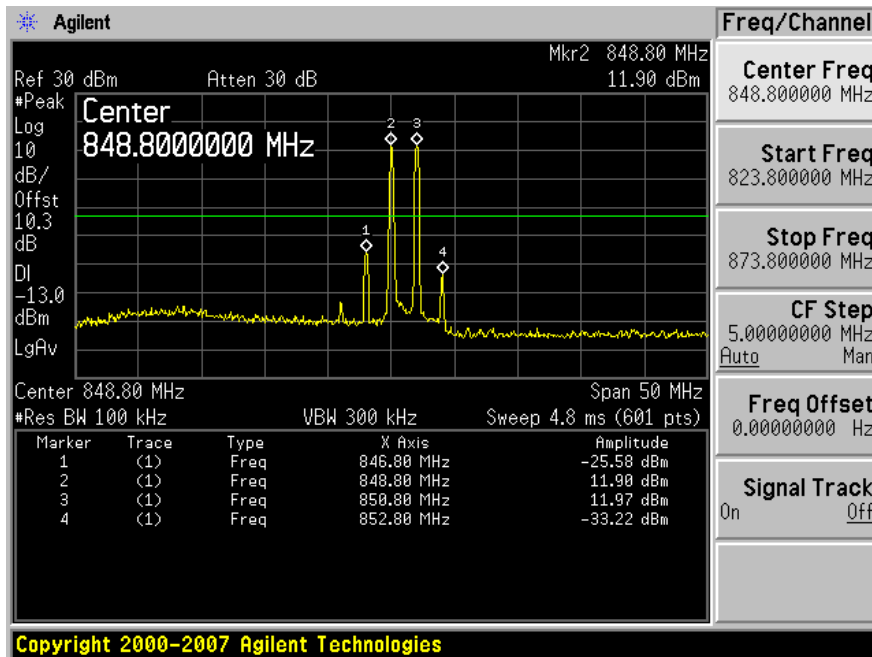


**GSM 1900 MHz band Low channel Uplink:**

Input

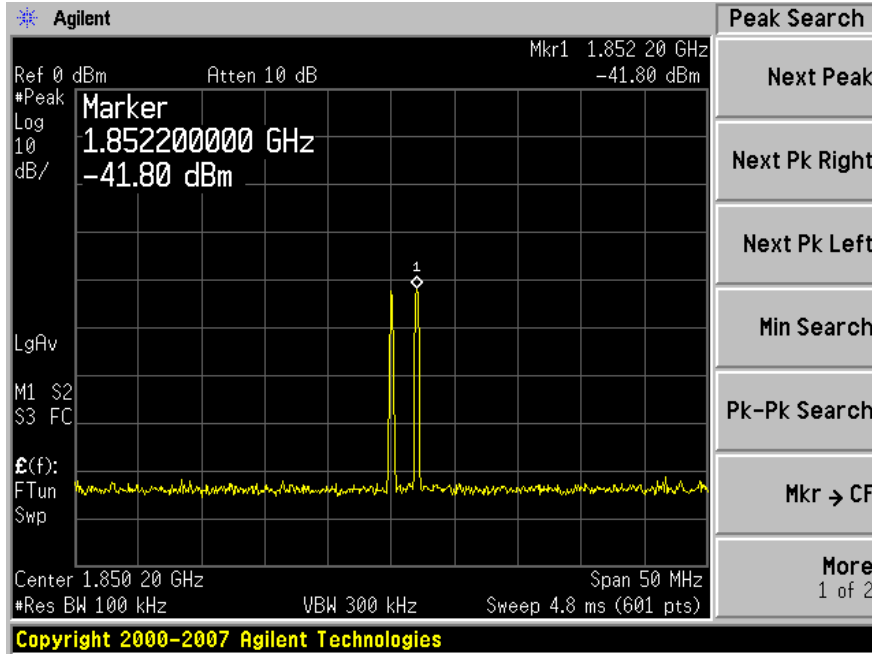


Output

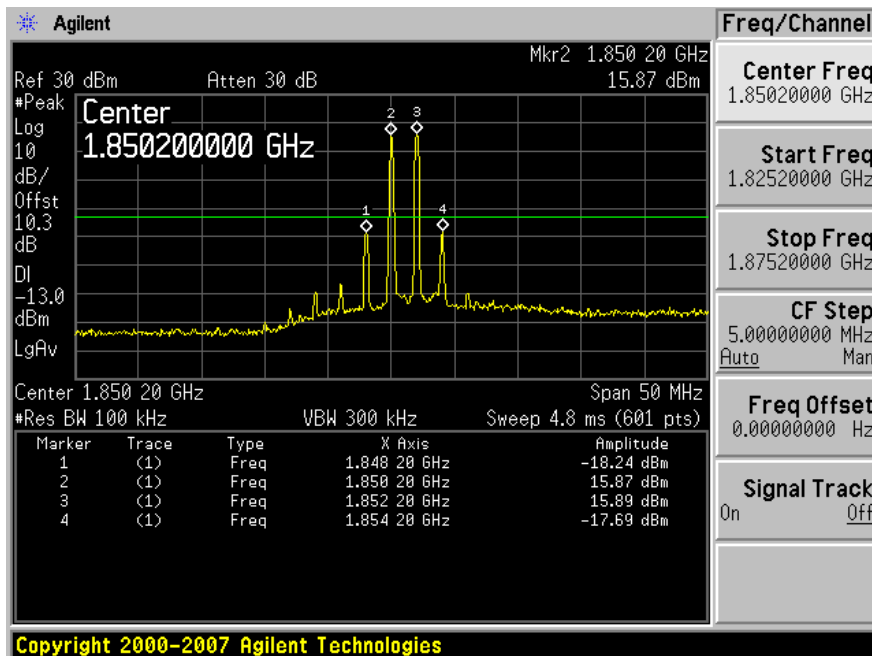


**GSM 1900 MHz band High channel Uplink:**

Input

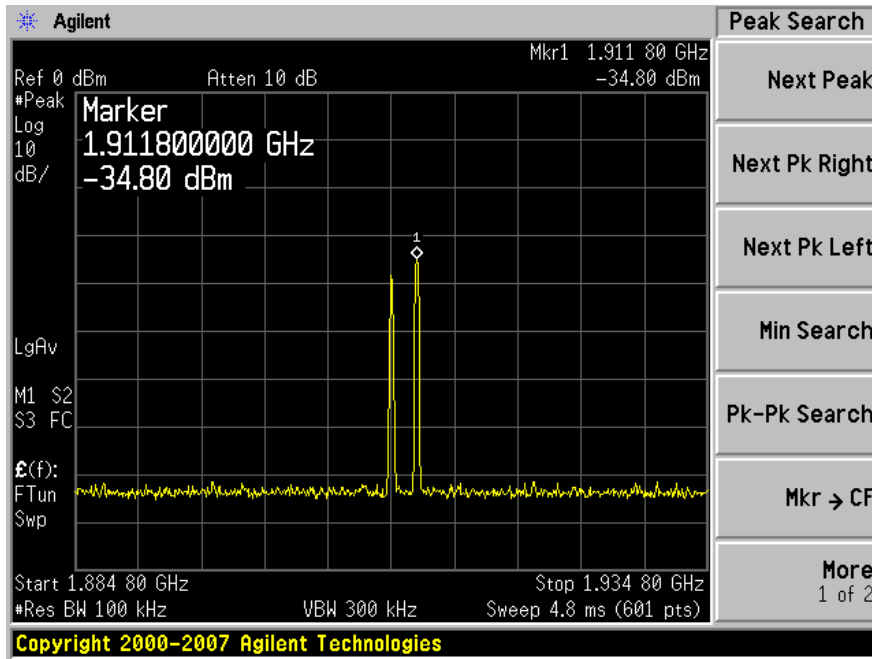


Output

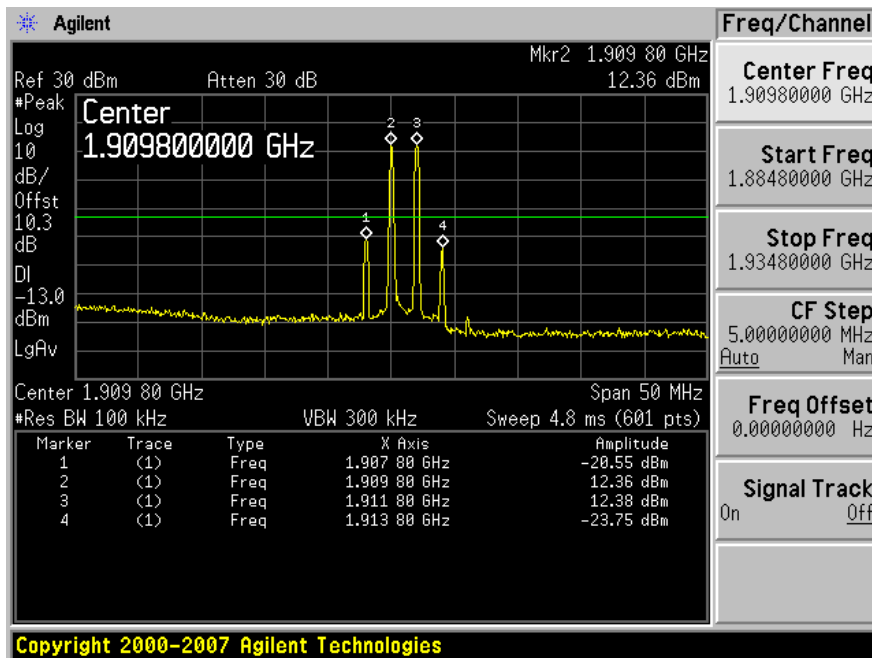




**GSM 850 MHz band Low channel Downlink:**

Input

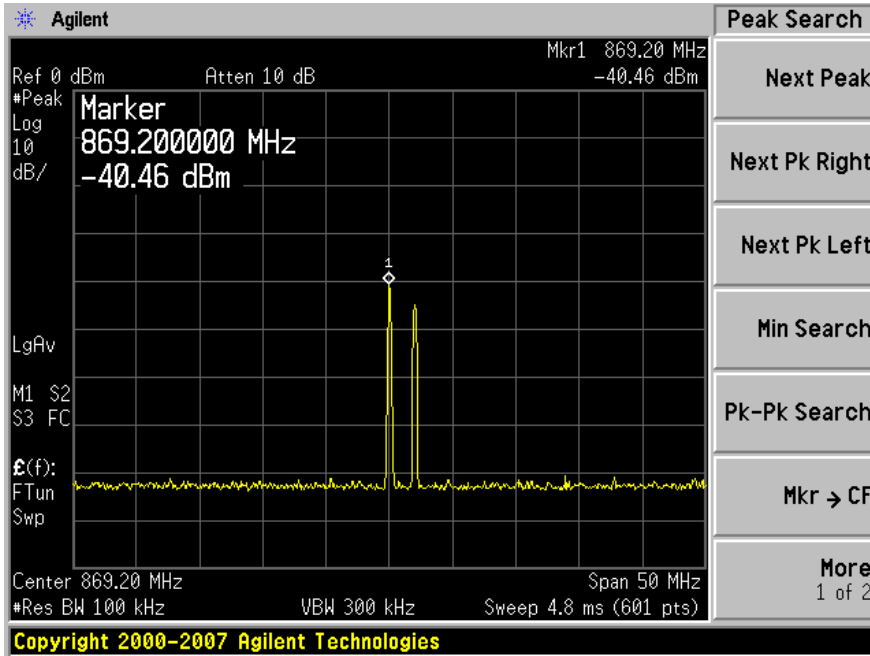


Output

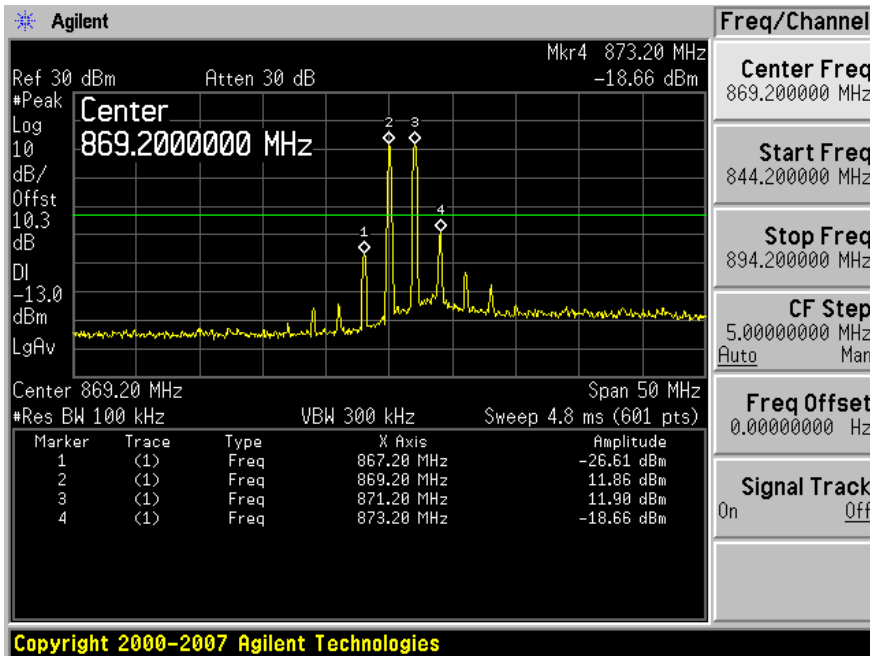


**GSM 850 MHz band High channel Downlink:**

Input

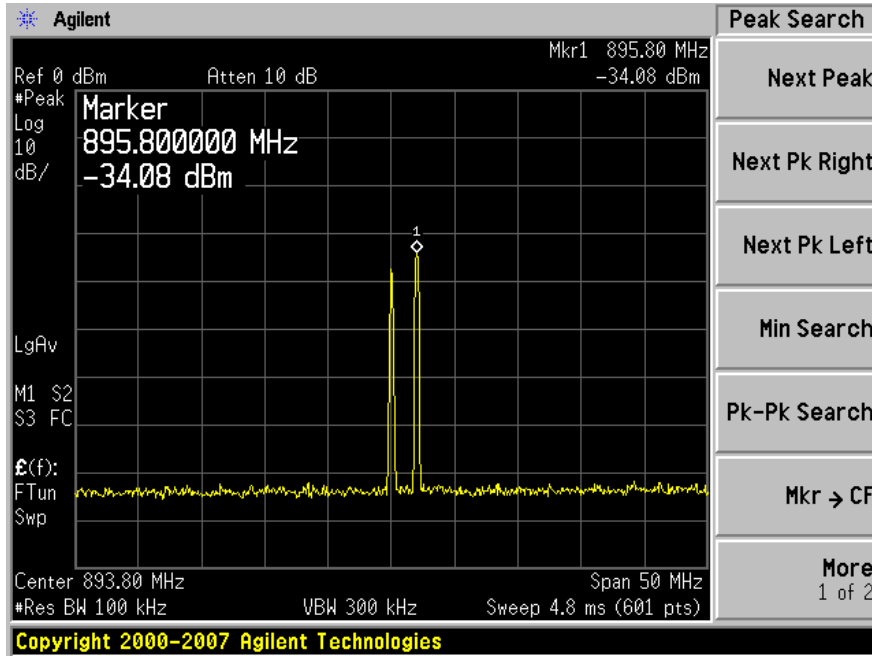


Output

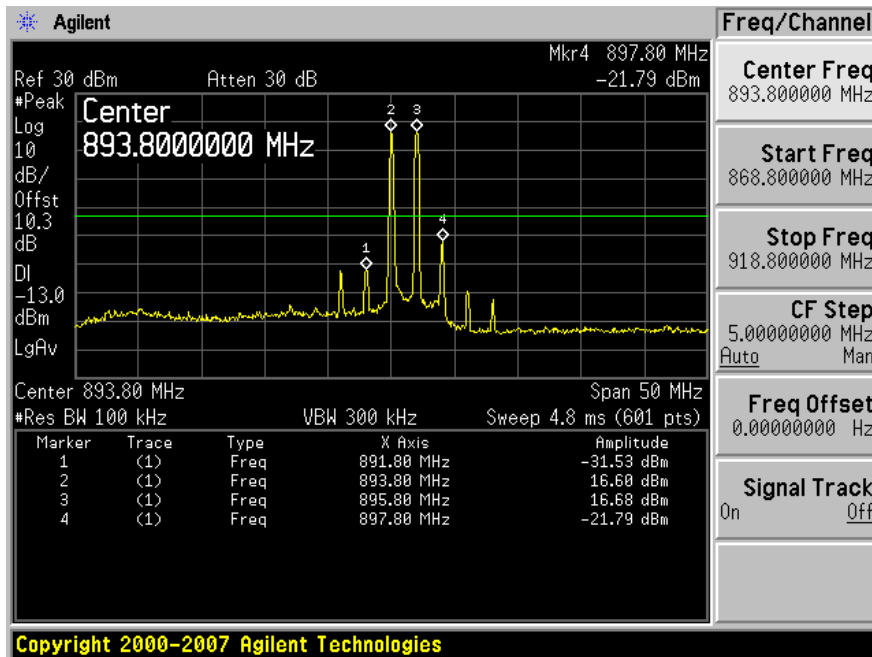


**GSM 1900 MHz band Low channel Downlink:**

Input

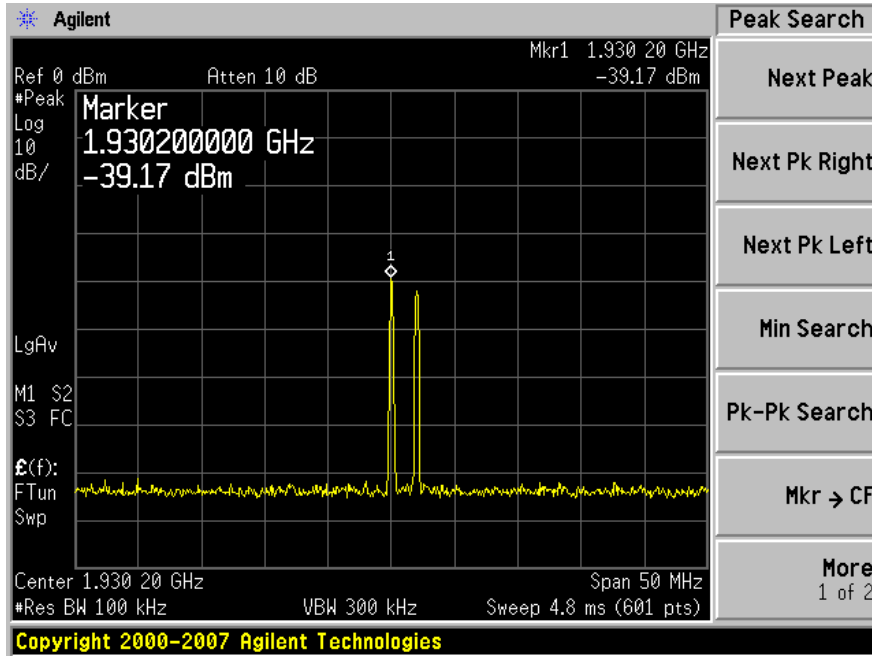


Output

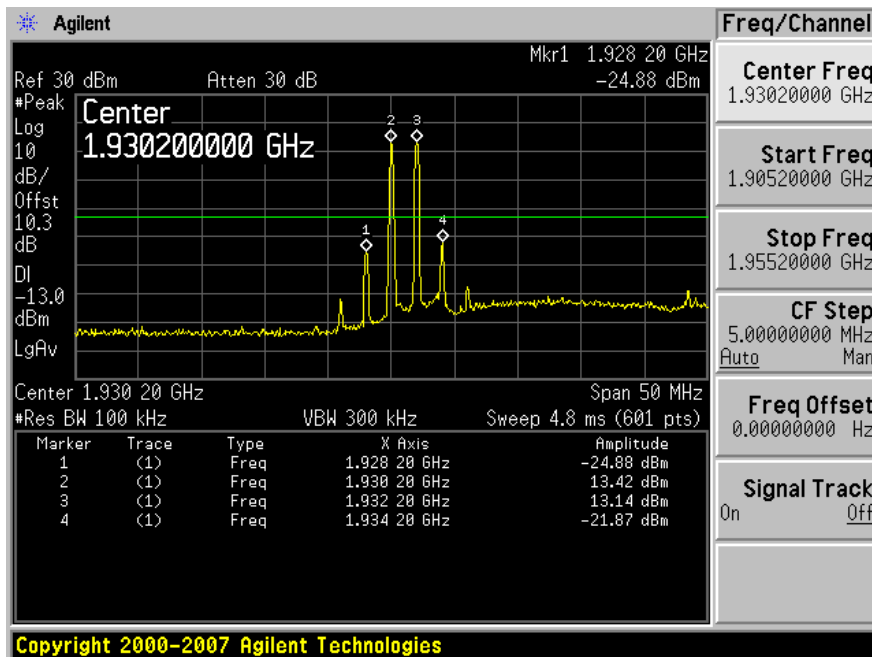


**GSM 1900 MHz band High channel Downlink:**

Input

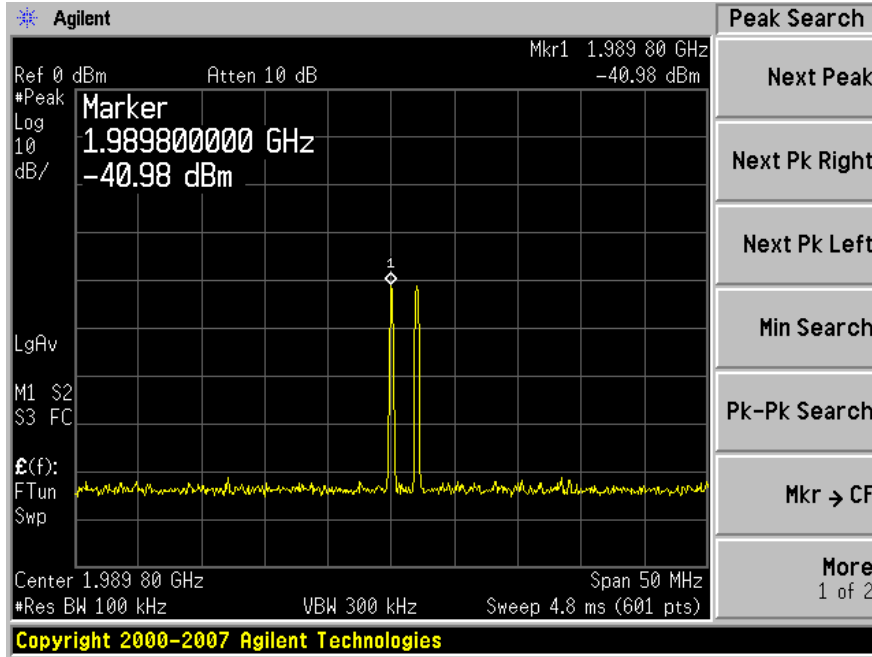


Output

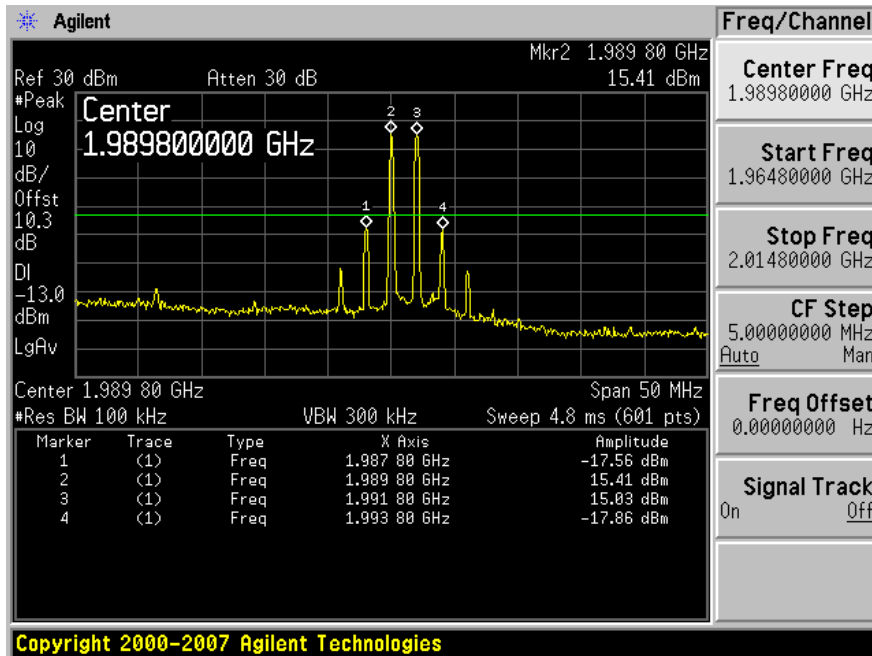


**CDMA 850 MHz band Low channel Uplink:**

Input

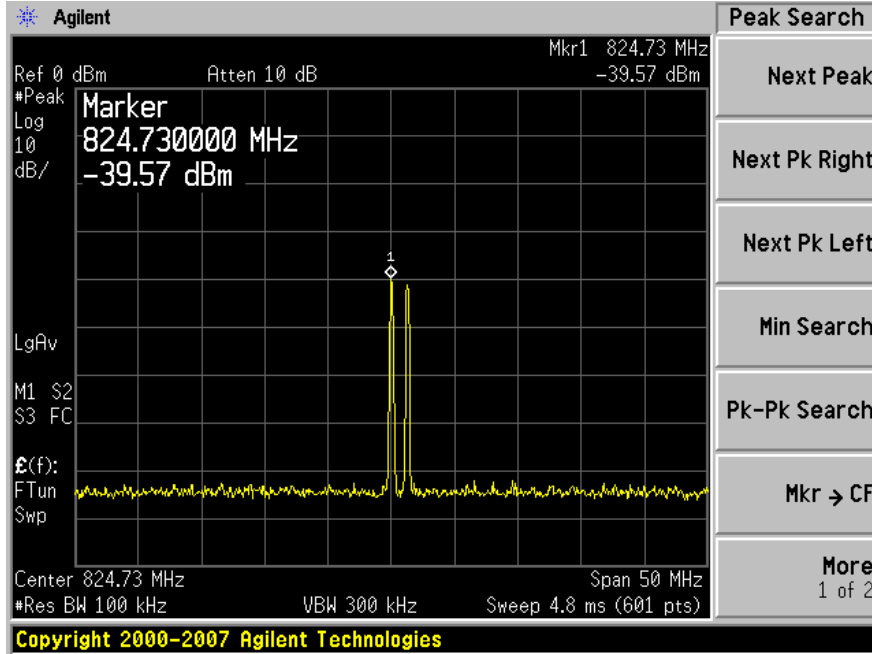


Output

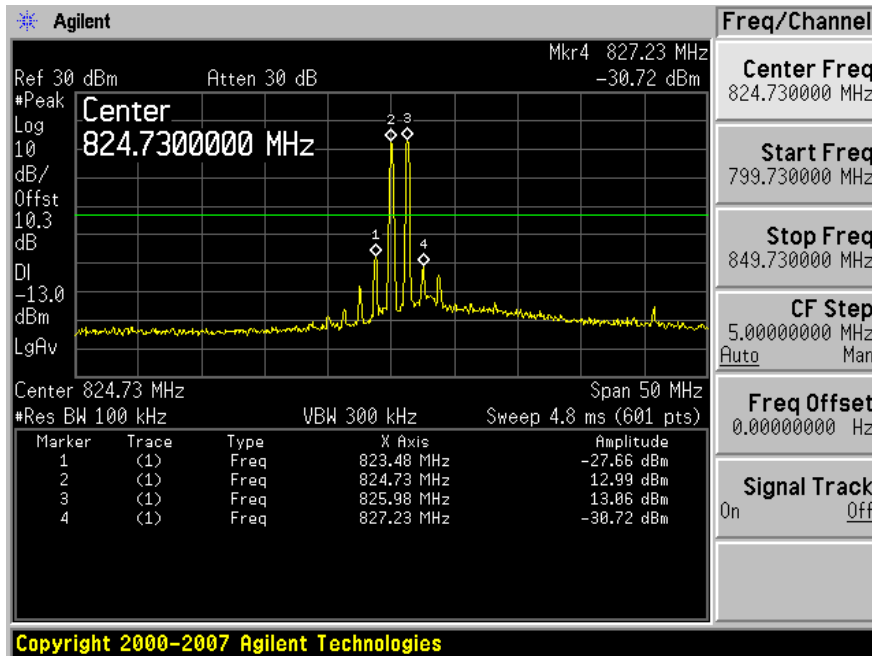


**CDMA 850MHz band High channel Uplink:**

Input

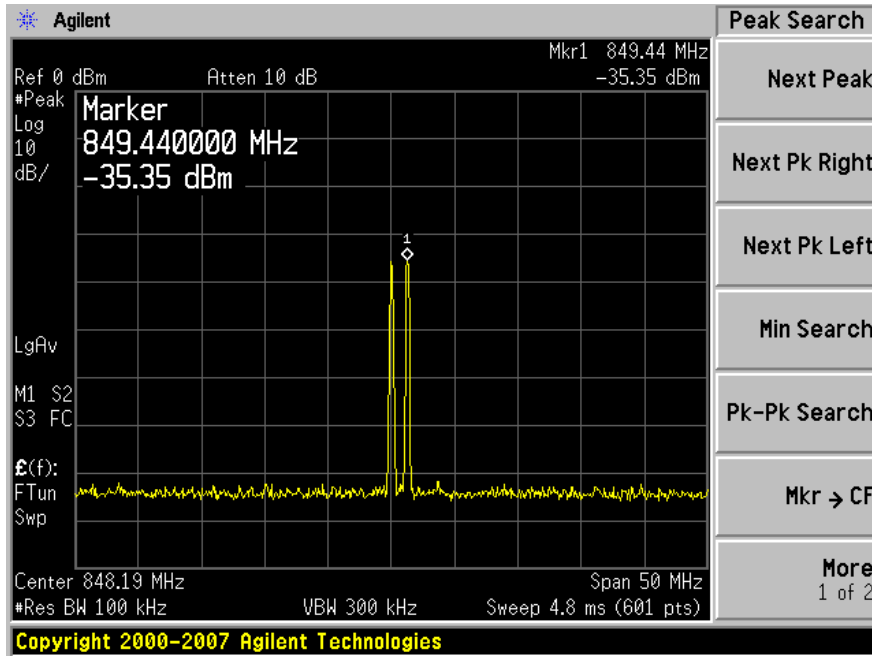


Output

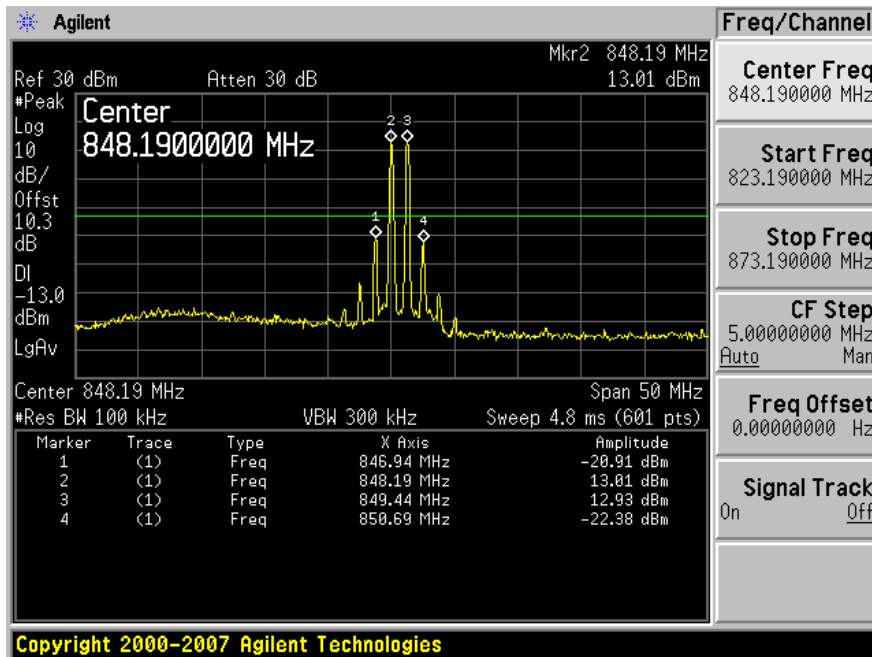


**CDMA 1900MHz band Low channel Uplink:**

Input

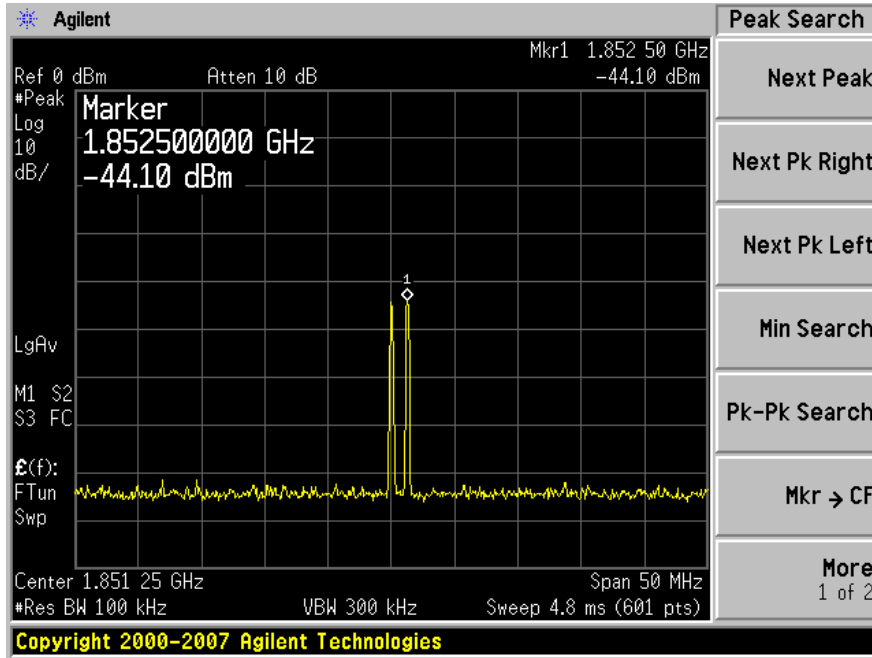


Output

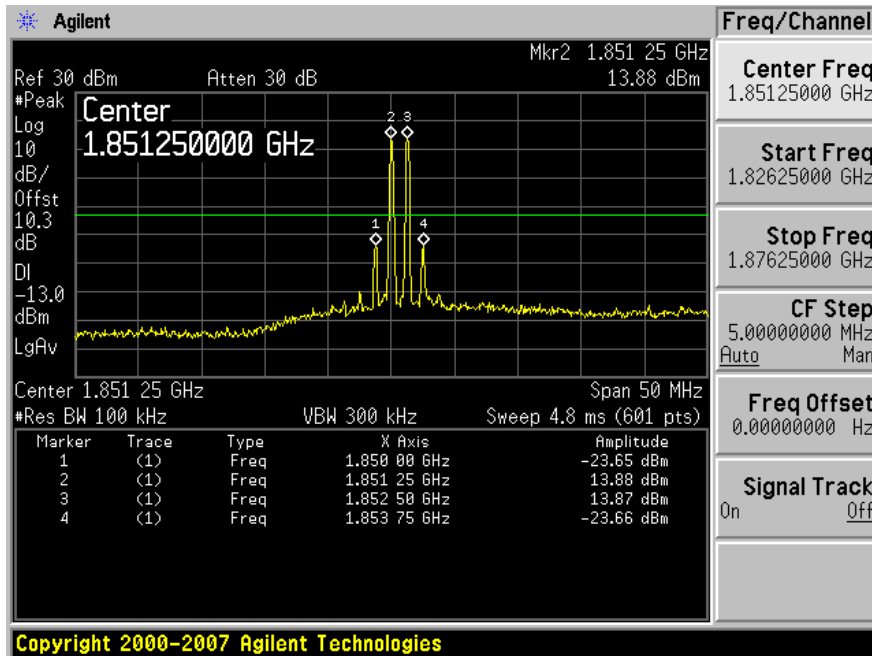


**CDMA 1900 MHz band High channel Uplink:**

Input

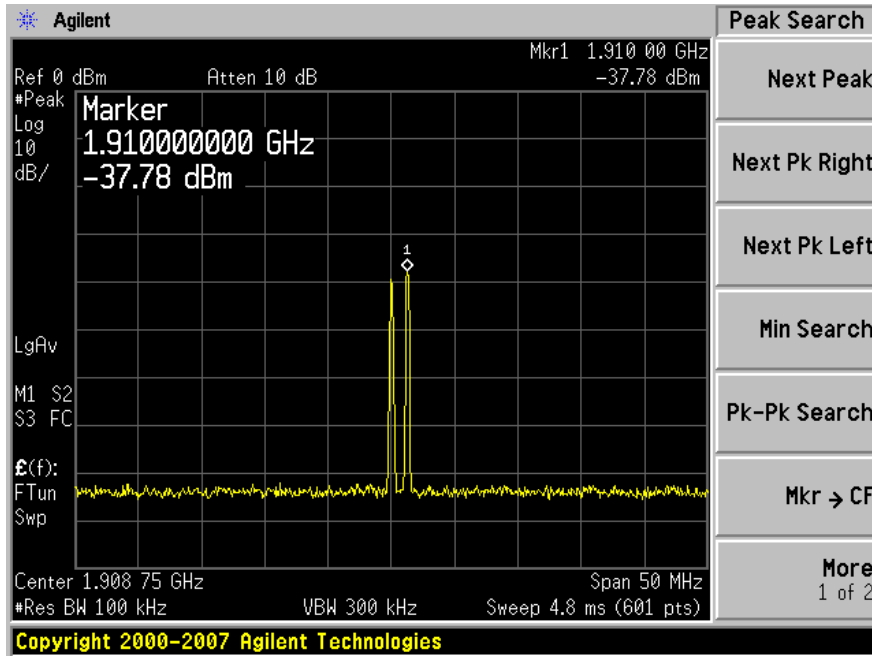


Output

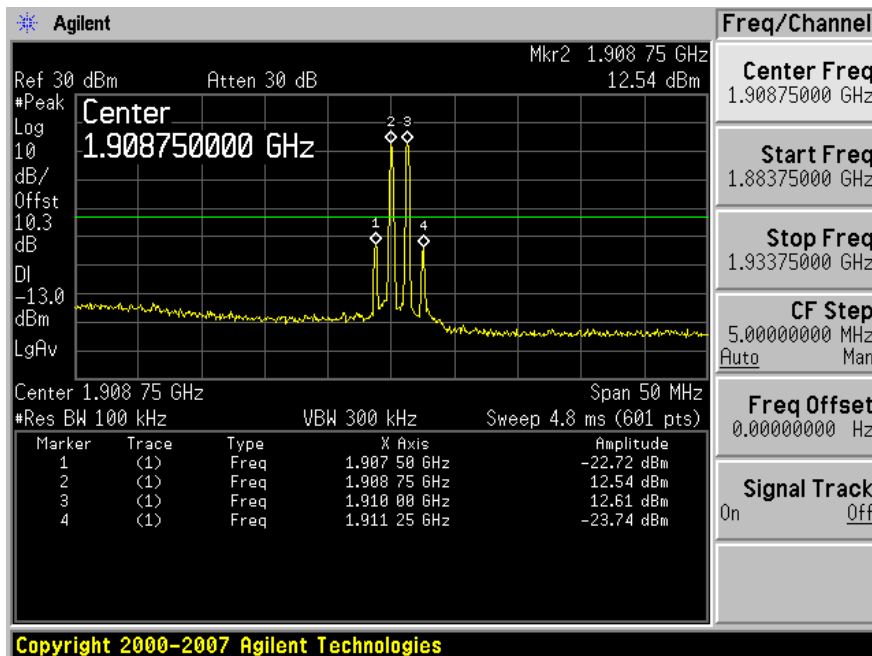




**CDMA 850 MHz band Low channel Downlink:**

Input

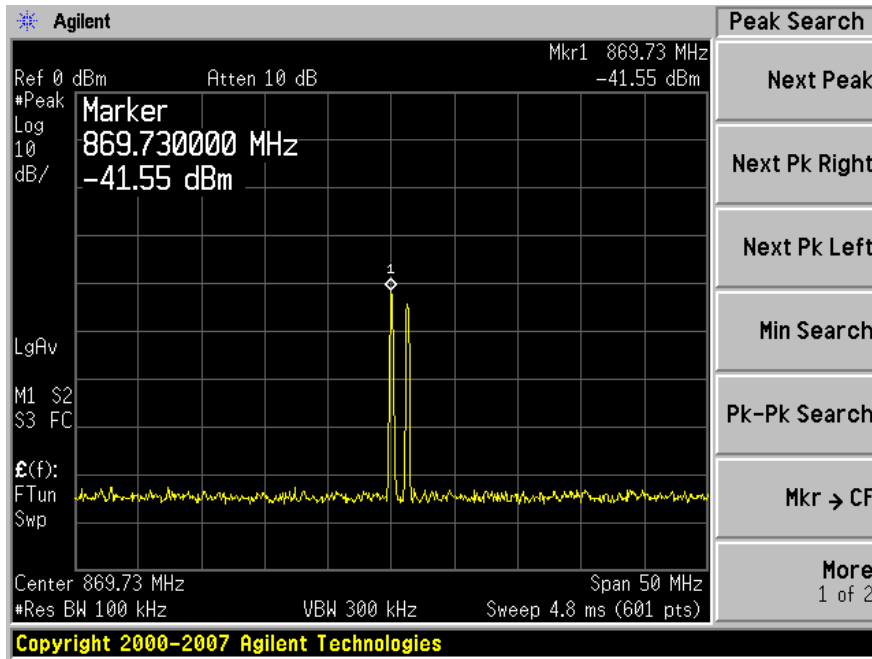


Output

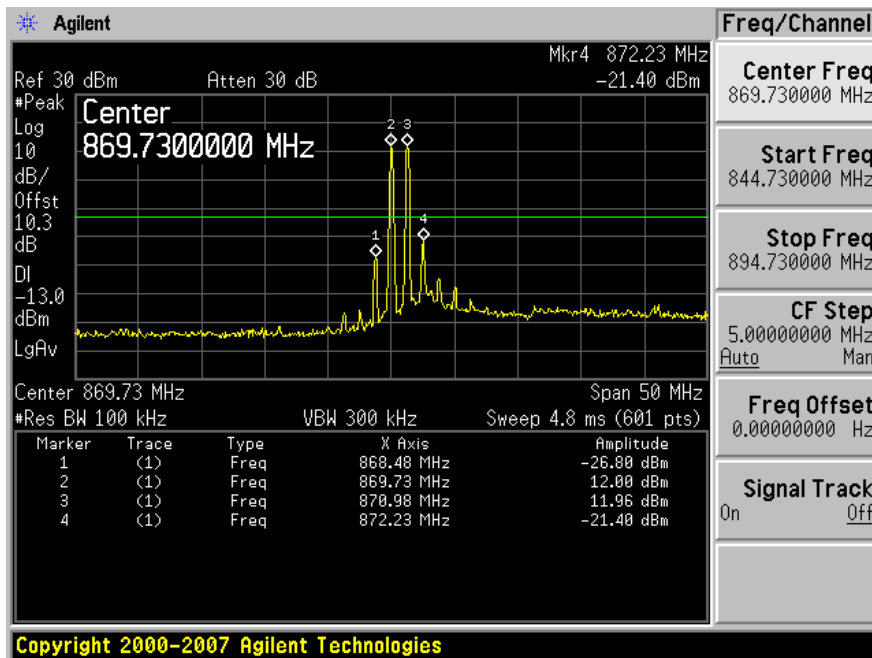


**CDMA 850 MHz band High channel Downlink:**

Input

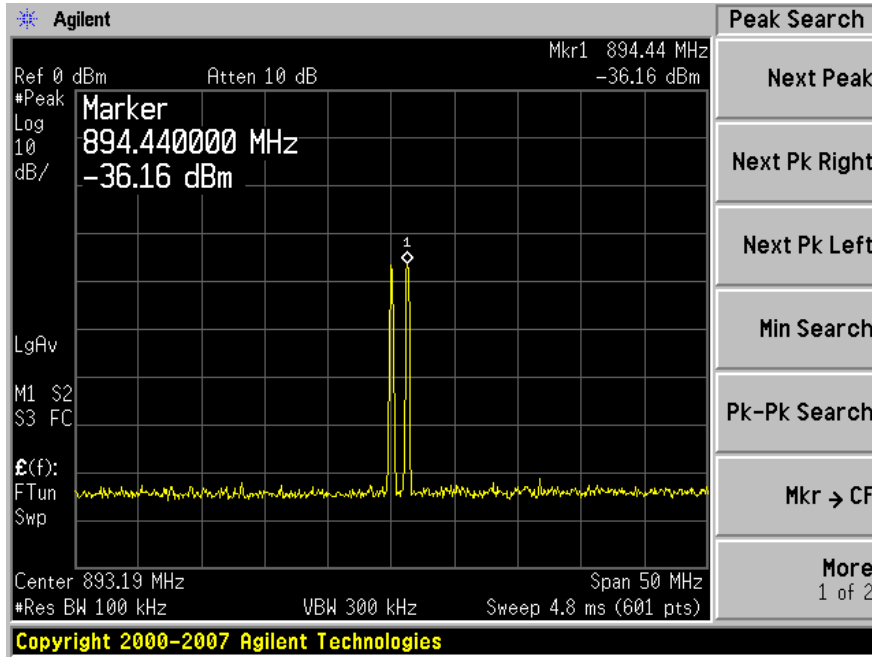


Output

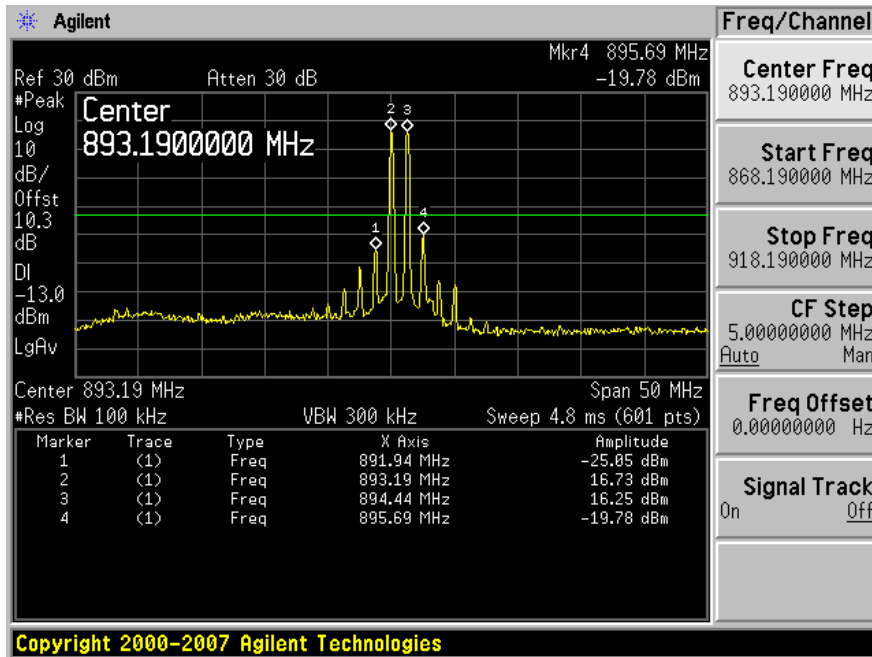


**CDMA 1900 MHz band Low channel Downlink:**

Input

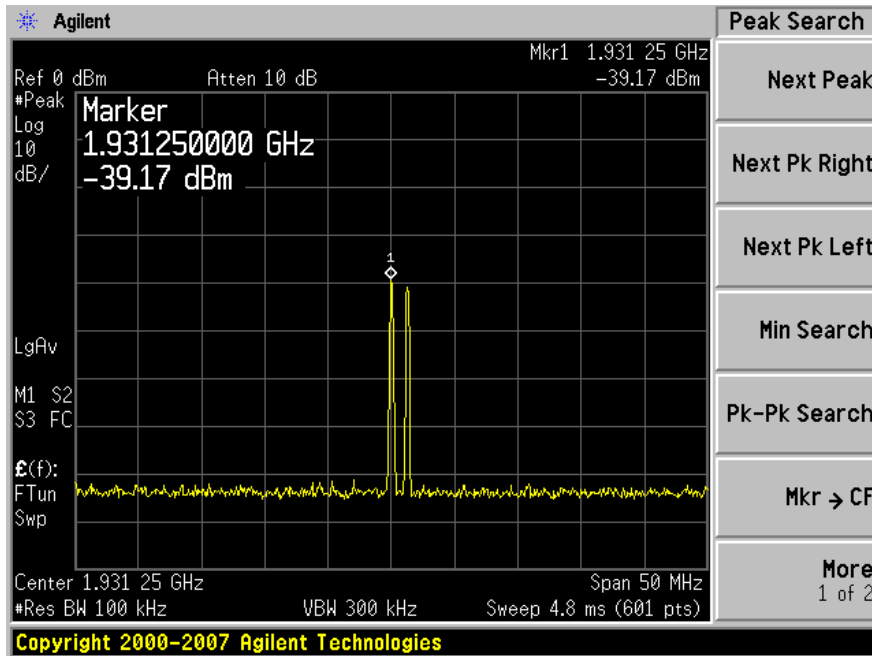


Output

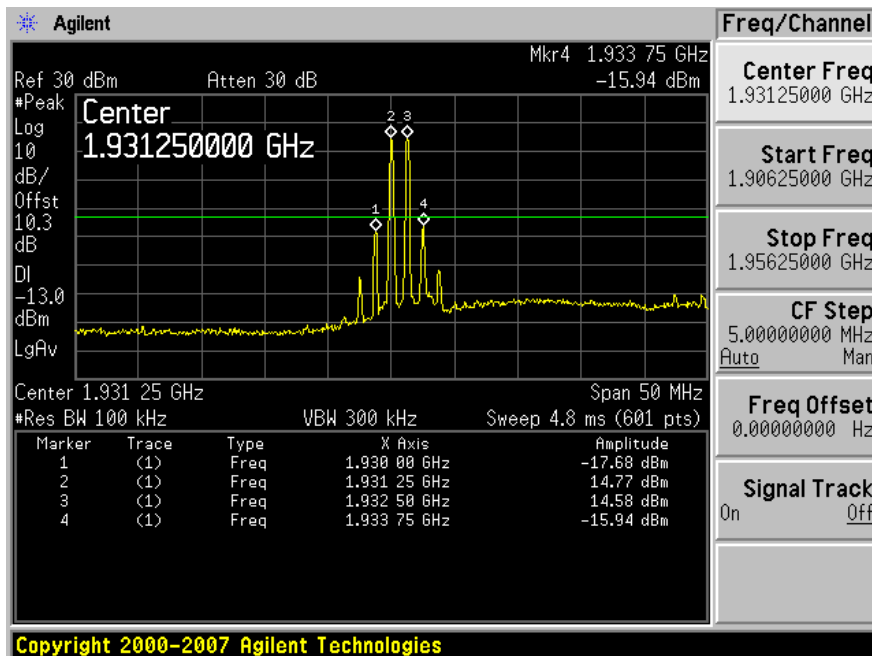


**CDMA 1900 MHz band High channel Downlink:**


Input

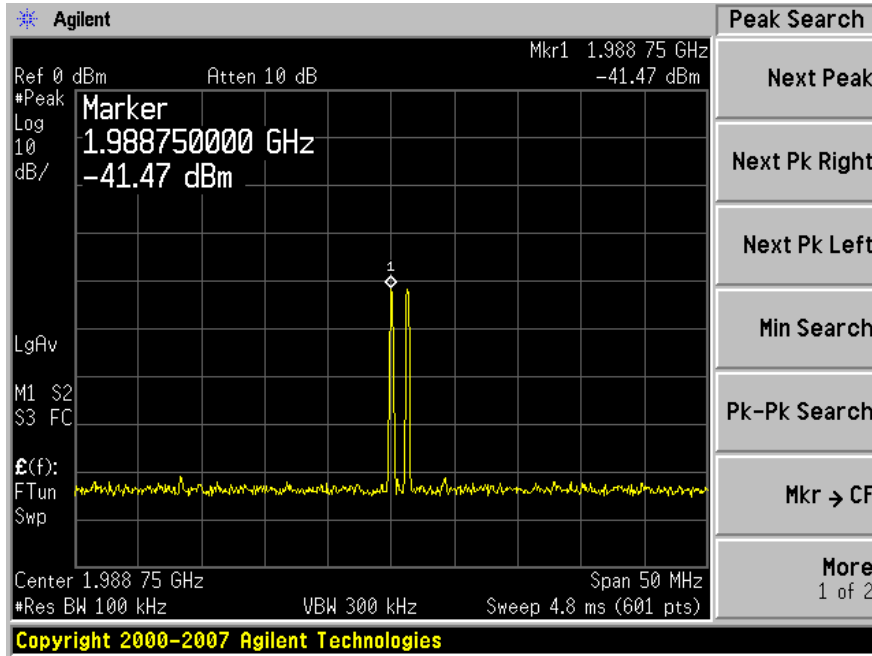


Output

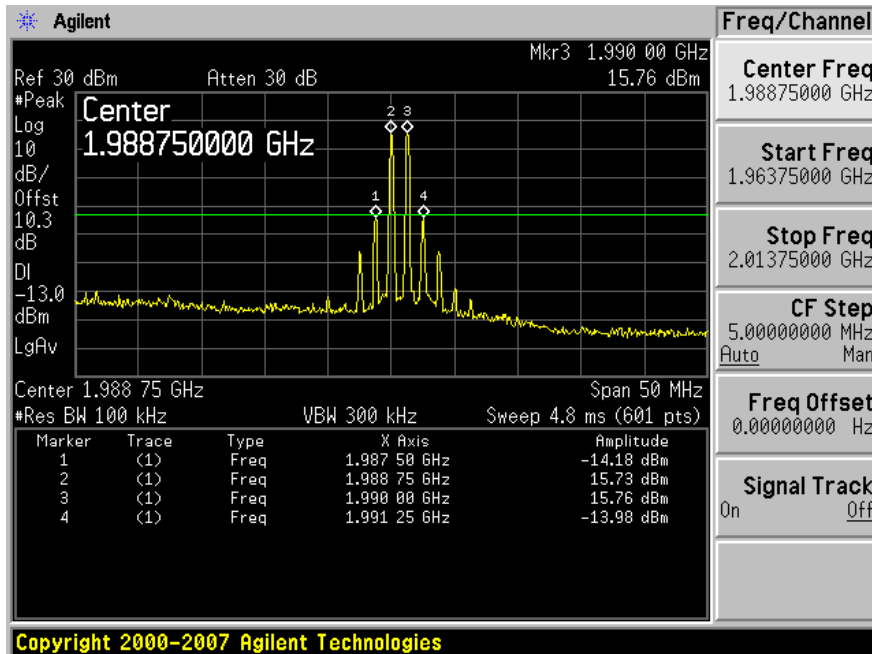

**GSM 850 MHz band Uplink: Low Channel (824.2 MHz)**

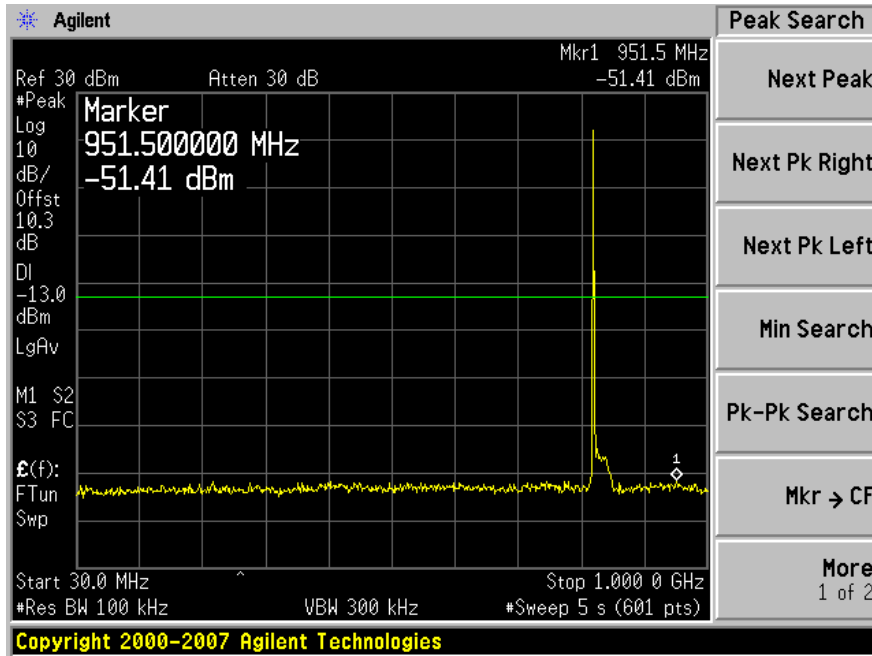


30 MHz to 1 GHz

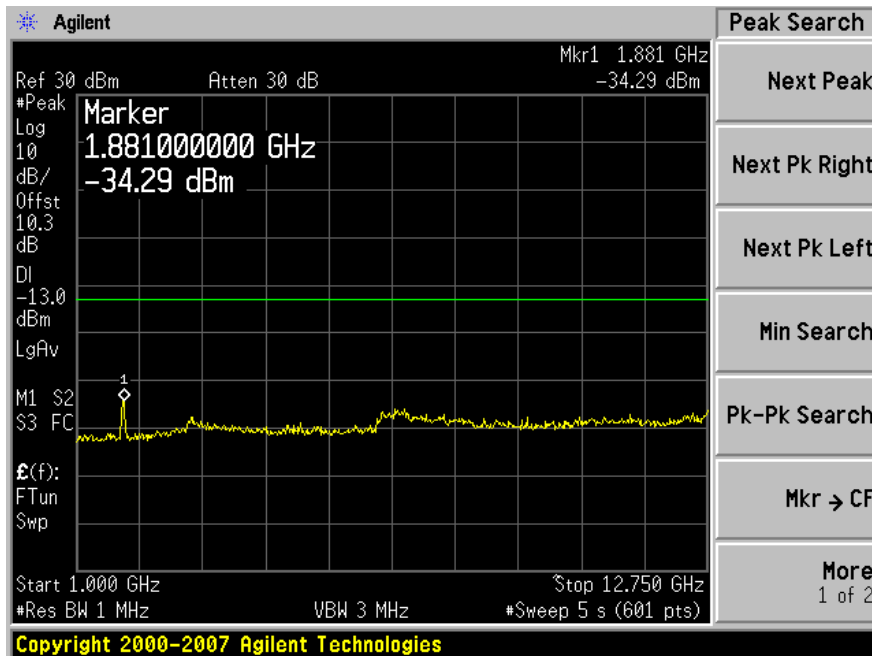


1 GHz to 12.75 GHz

### GSM 850 MHz band Uplink: Middle Channel (836.6 MHz)

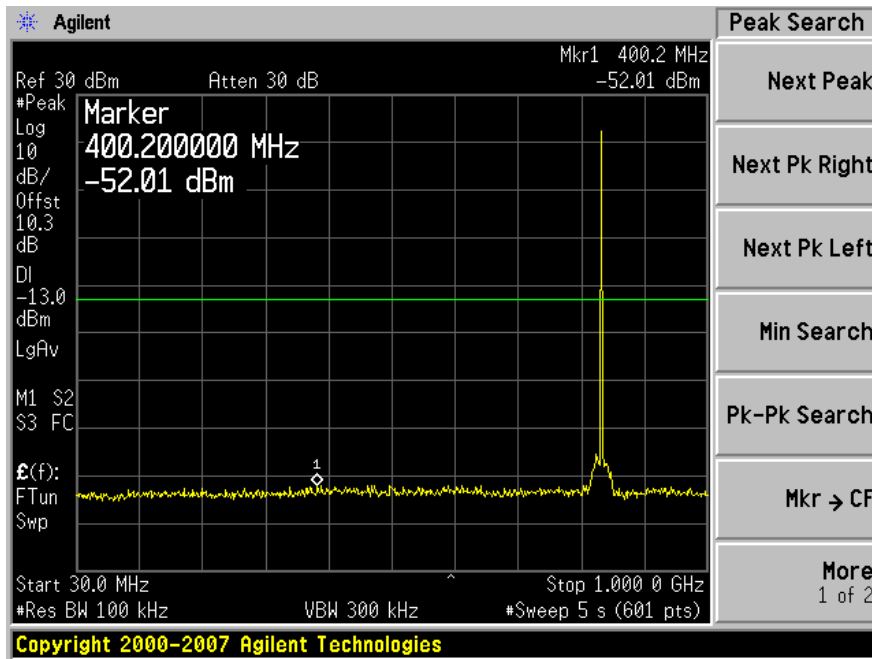


30 MHz to 1 GHz

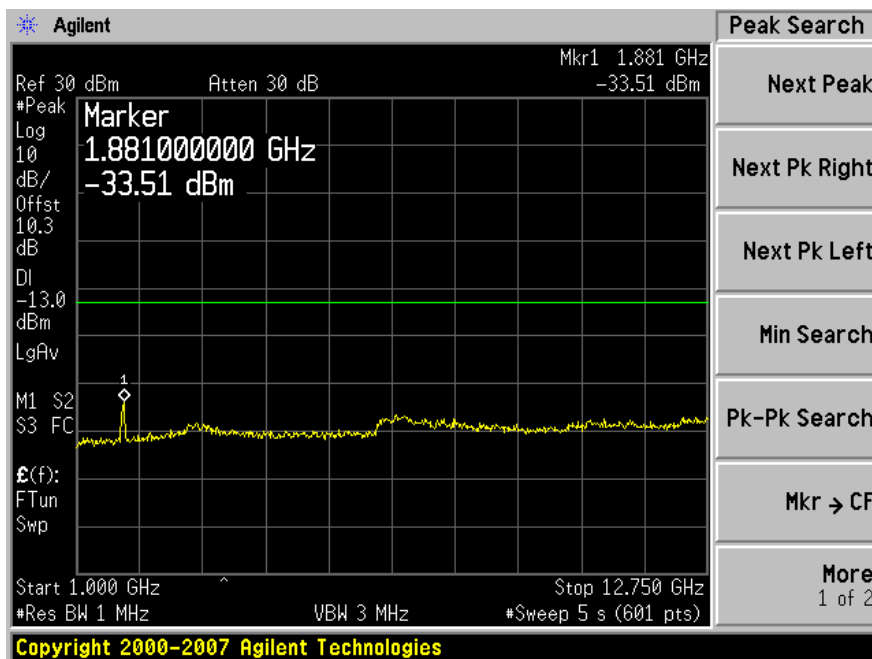


1 GHz to 12.75 GHz

**GSM 850 MHz band Uplink: High Channel (848.8 MHz)**

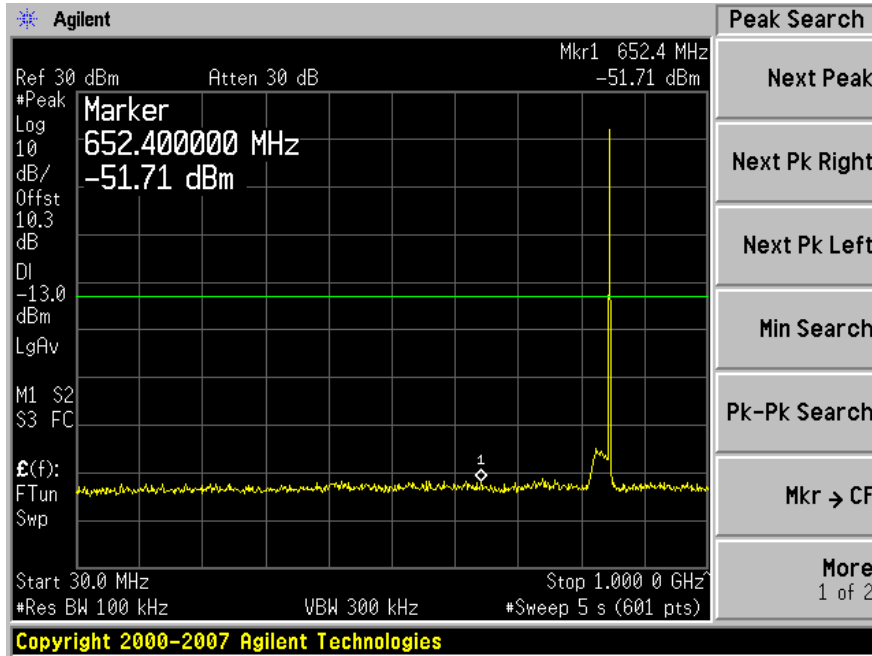


30 MHz to 1 GHz

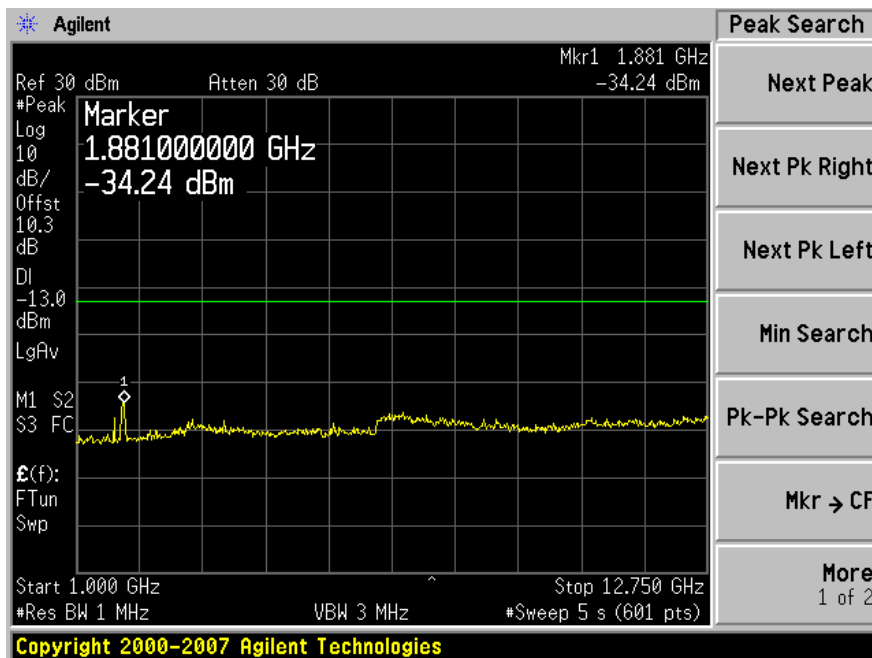


1 GHz to 12.75 GHz

**GSM 850 MHz band Downlink: Low Channel (869.2 MHz)**

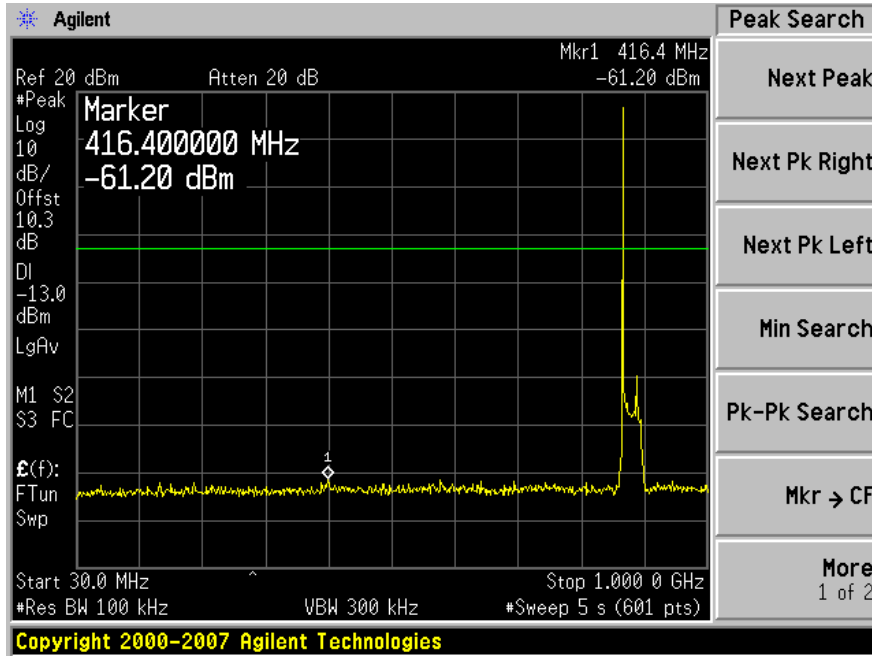


30 MHz to 1 GHz

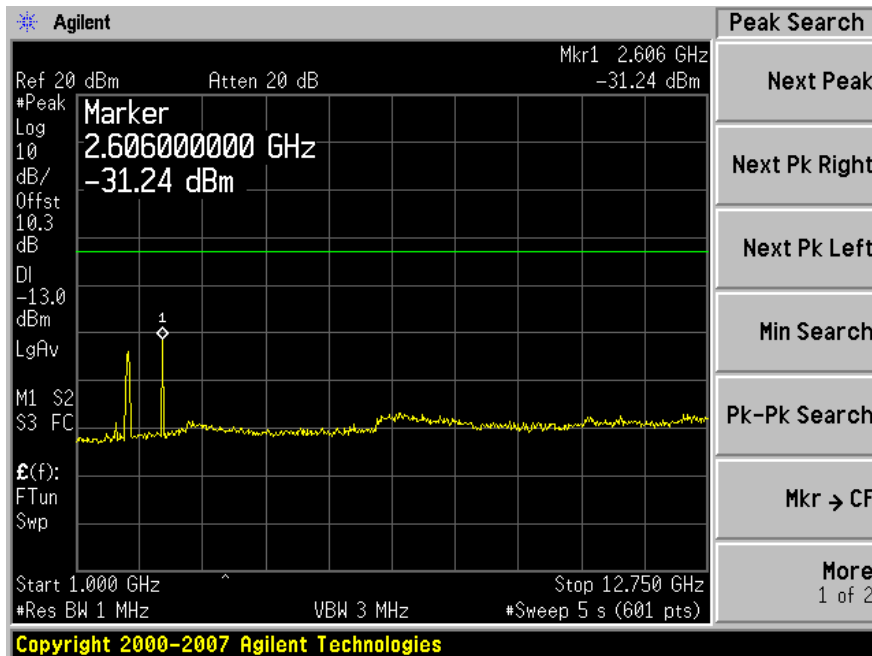


1 GHz to 12.75 GHz



**GSM 850 MHz band Downlink: Middle Channel (881.6 MHz)**

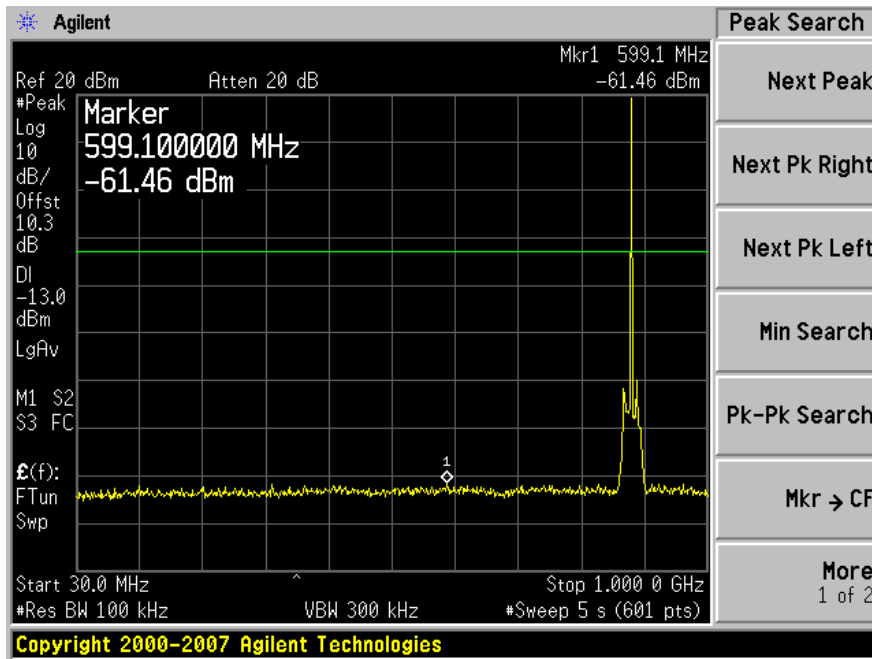


30 MHz to 1 GHz

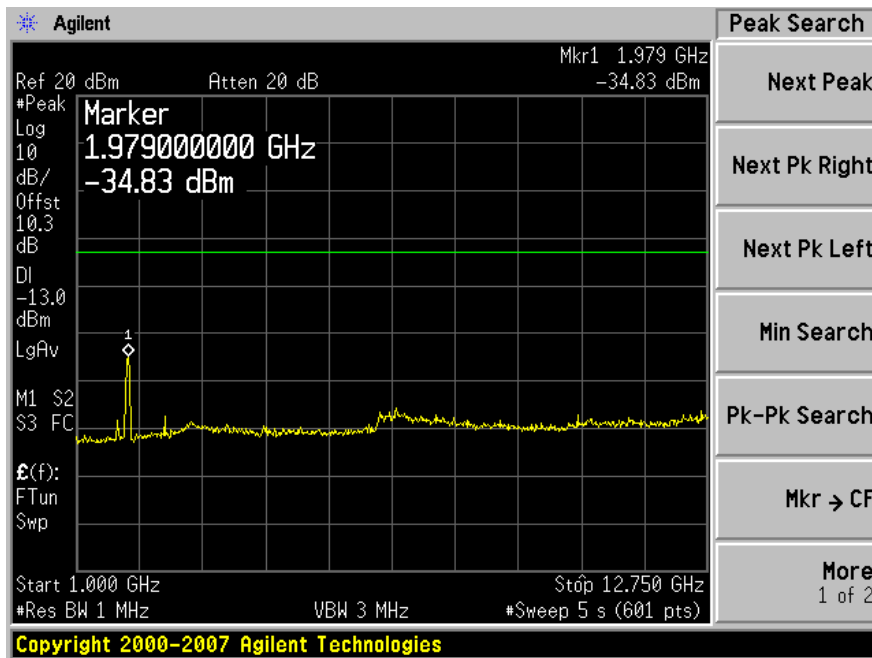


1 GHz to 12.75 GHz

**GSM 850 MHz band Downlink: High Channel (893.8 MHz)**

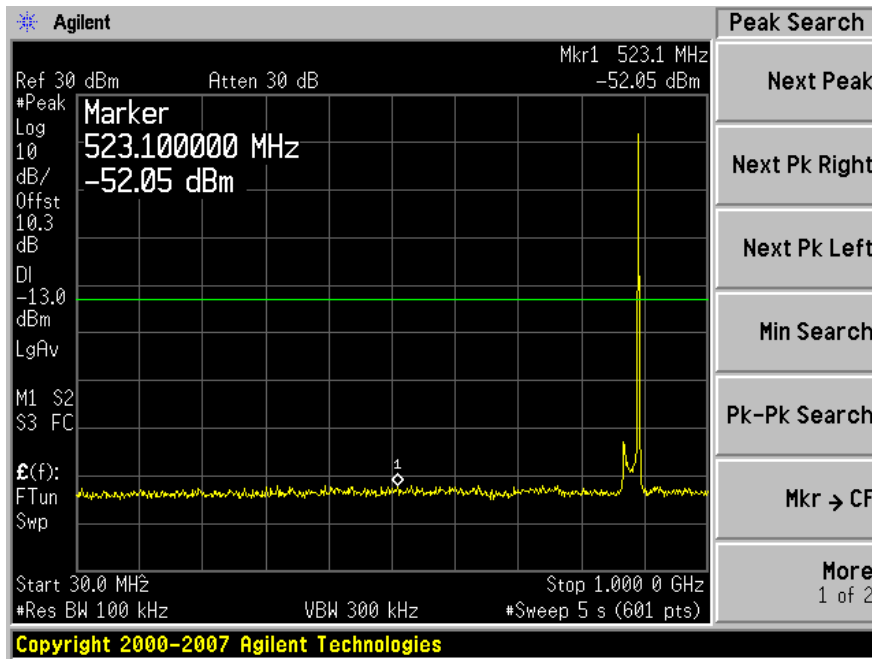


30 MHz to 1 GHz

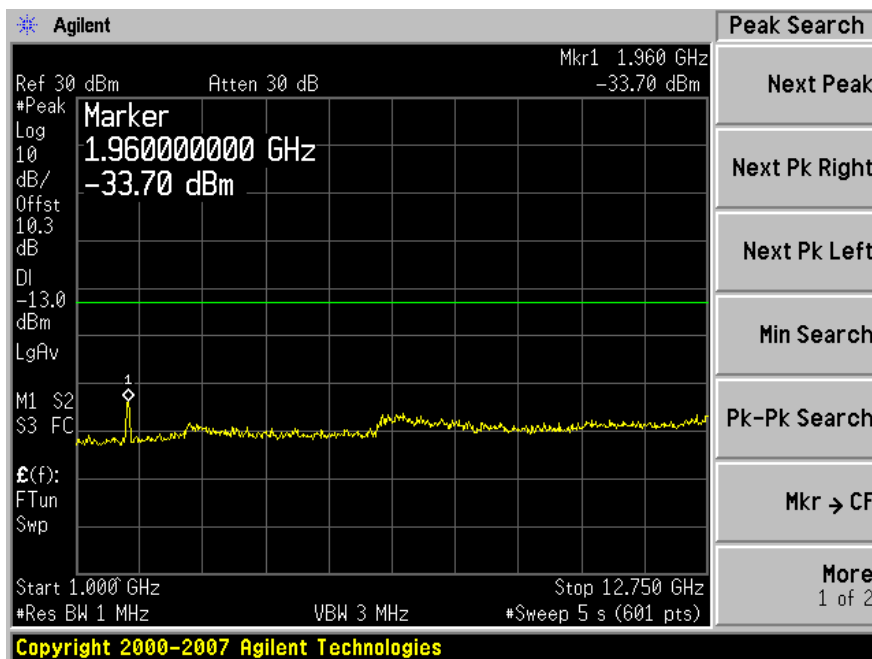


1 GHz to 12.75 GHz

**GSM 1900 MHz band Uplink: Low Channel (1850.2 MHz)**

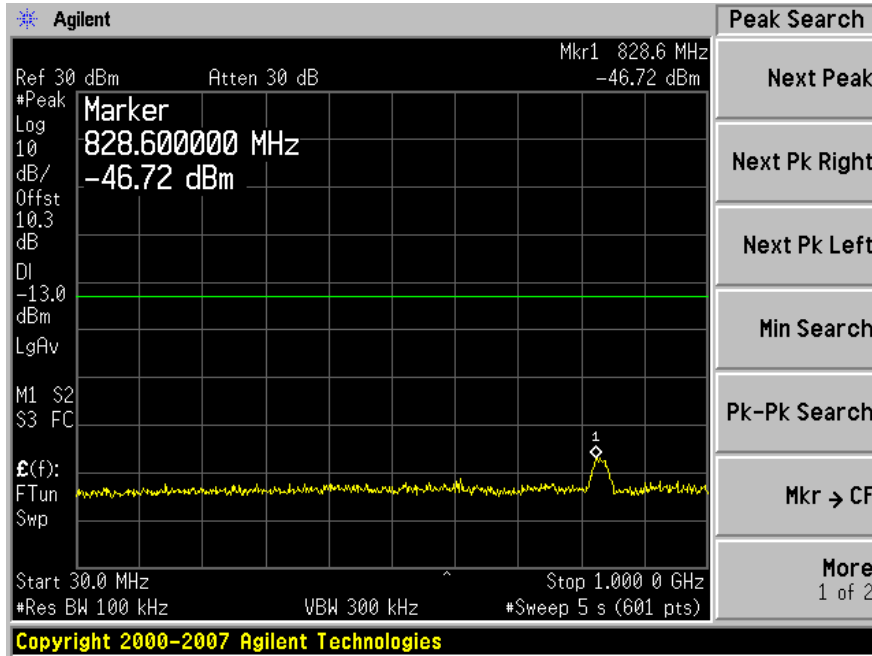


30 MHz to 1 GHz

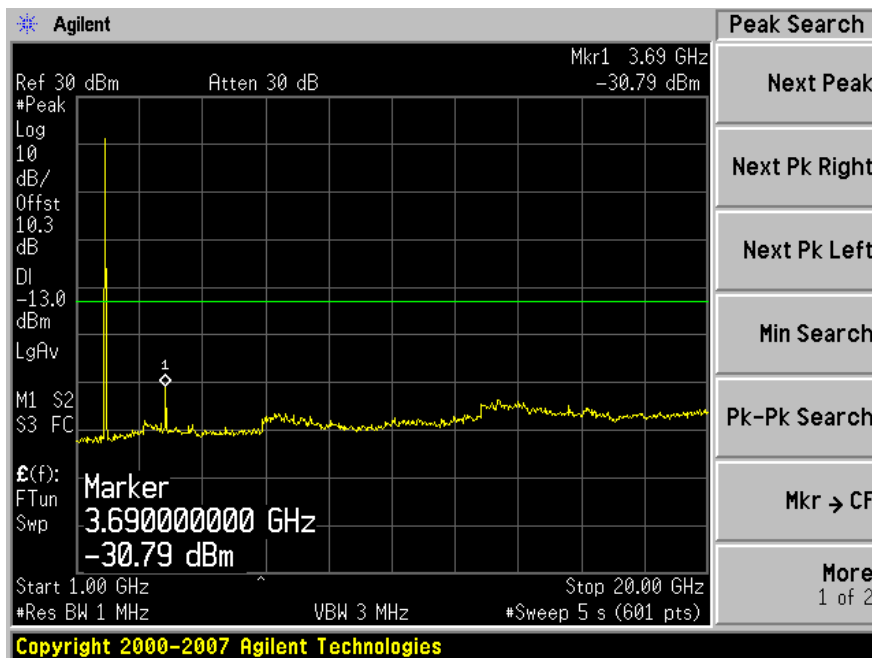


1 GHz to 20 GHz

**GSM 1900 MHz band Uplink: Middle Channel (1880 MHz)**

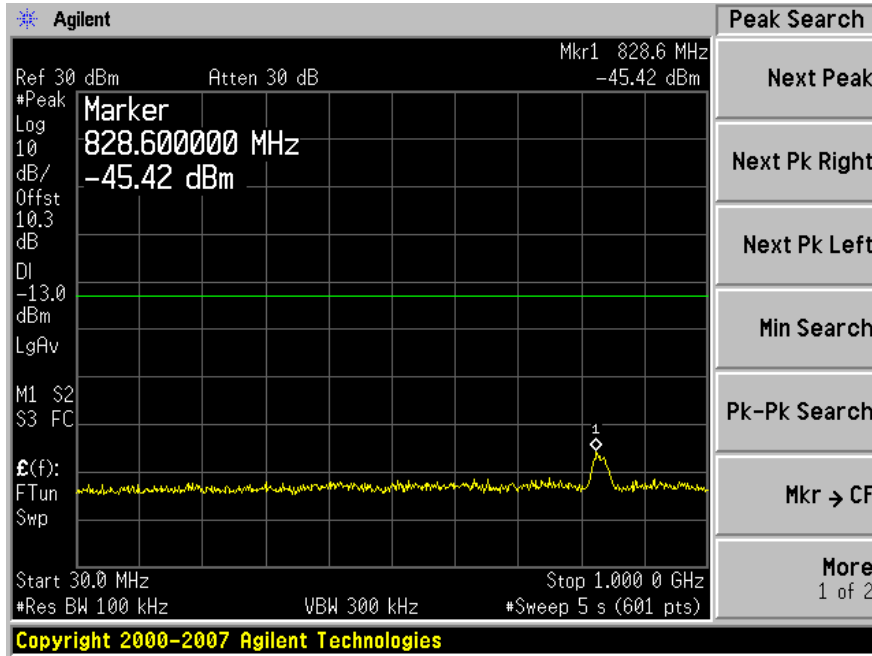


30 MHz to 1 GHz

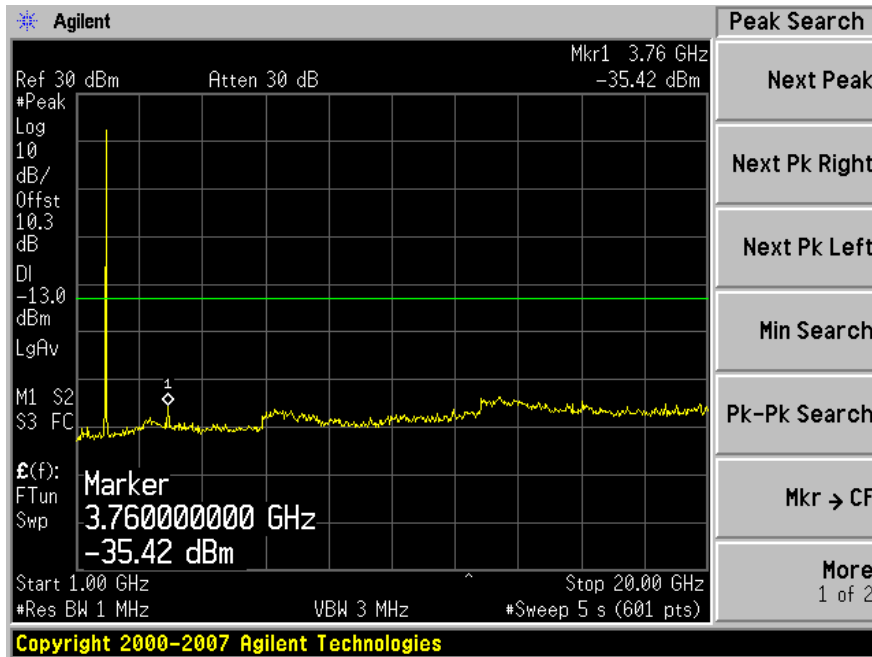


1 GHz to 20 GHz

**GSM 1900 MHz band Uplink: High Channel (1909.8 MHz)**

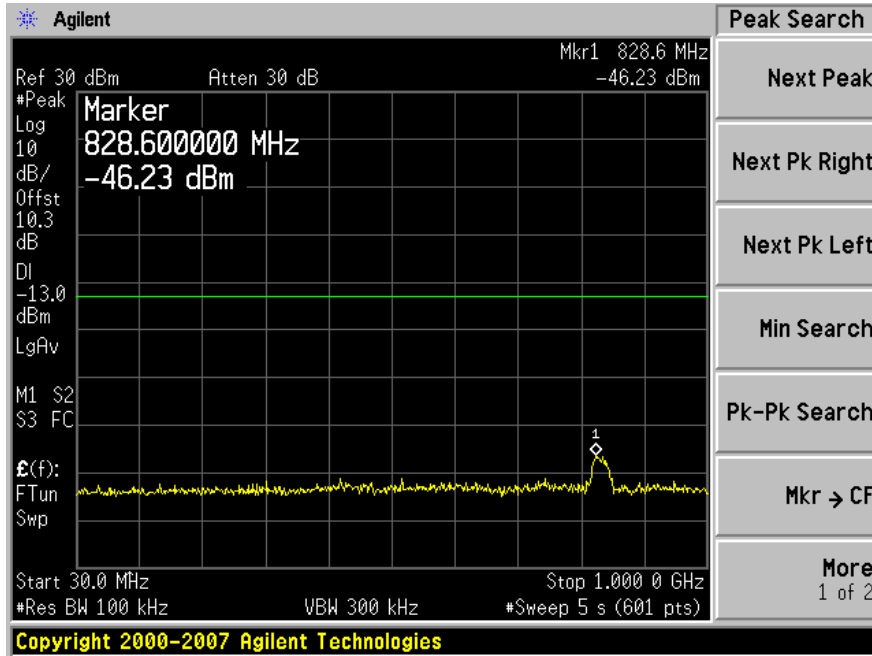


**30 MHz to 1 GHz**

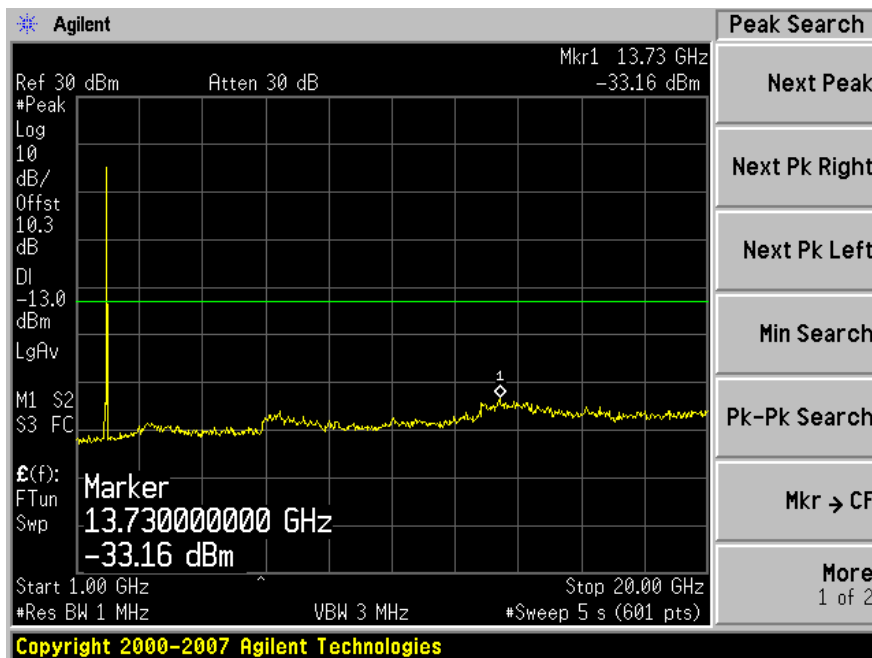


**1 GHz to 20 GHz**

**GSM 1900 MHz band Downlink: Low Channel (1930.2 MHz)**

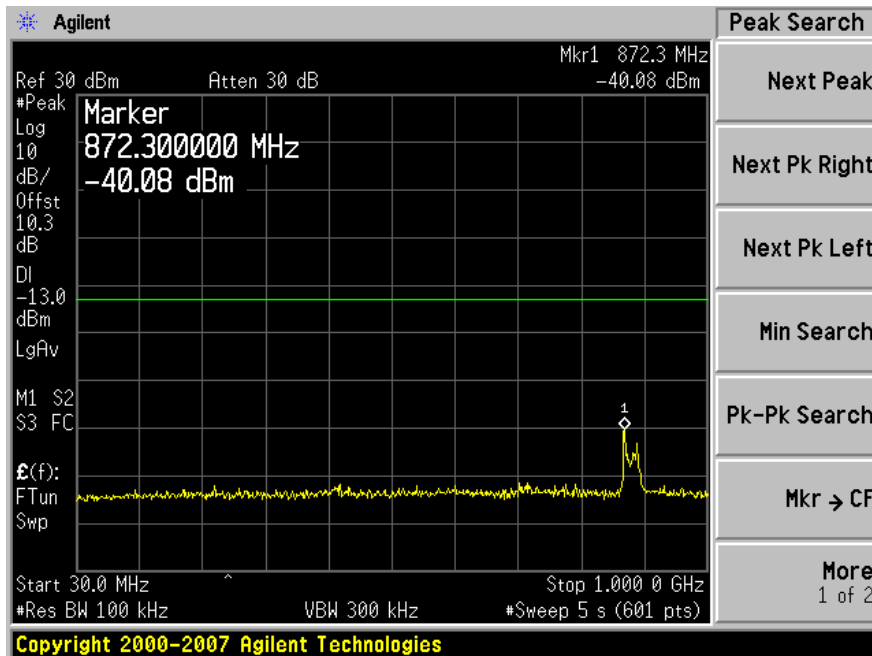


30 MHz to 1 GHz

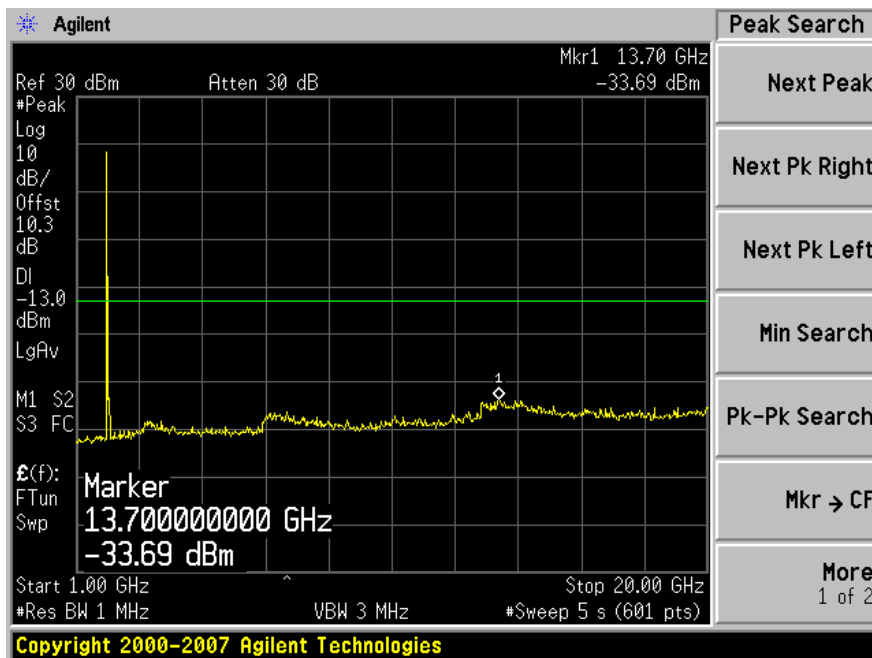


1 GHz to 20 GHz

**GSM 1900 MHz band Downlink: Middle Channel (1960 MHz)**

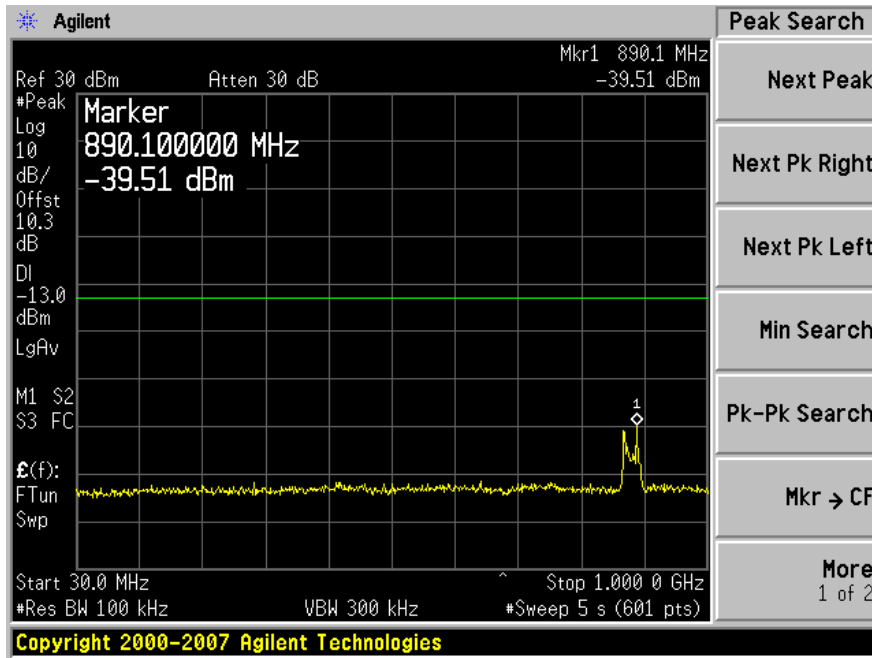


30 MHz to 1 GHz

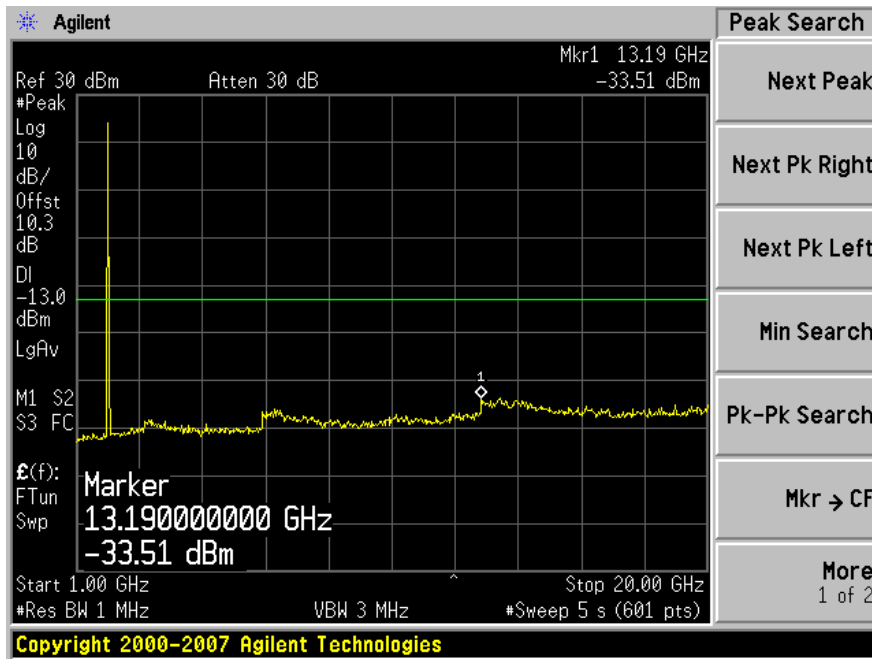


1 GHz to 20 GHz

**GSM 1900 MHz band Downlink: High Channel (1989.8 MHz)**

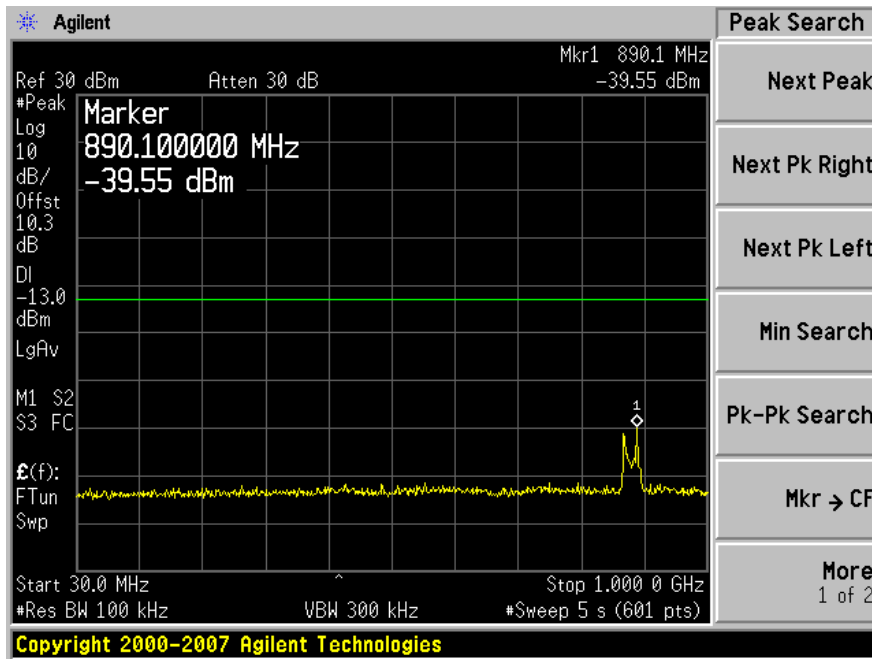


30 MHz to 1 GHz

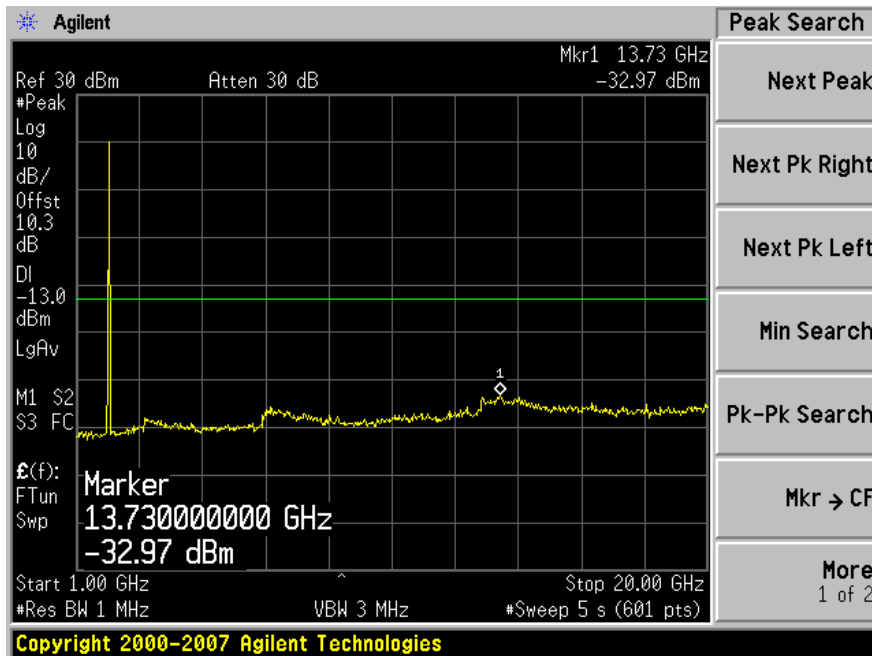


1 GHz to 20 GHz



**CDMA 850 MHz band Uplink: Low Channel (824.73 MHz)**

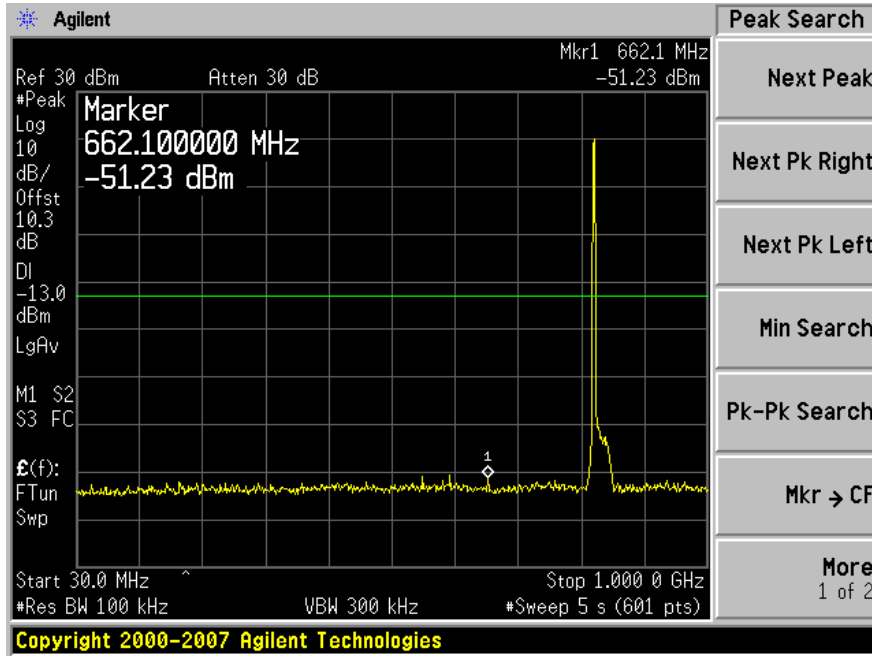


30 MHz to 1 GHz

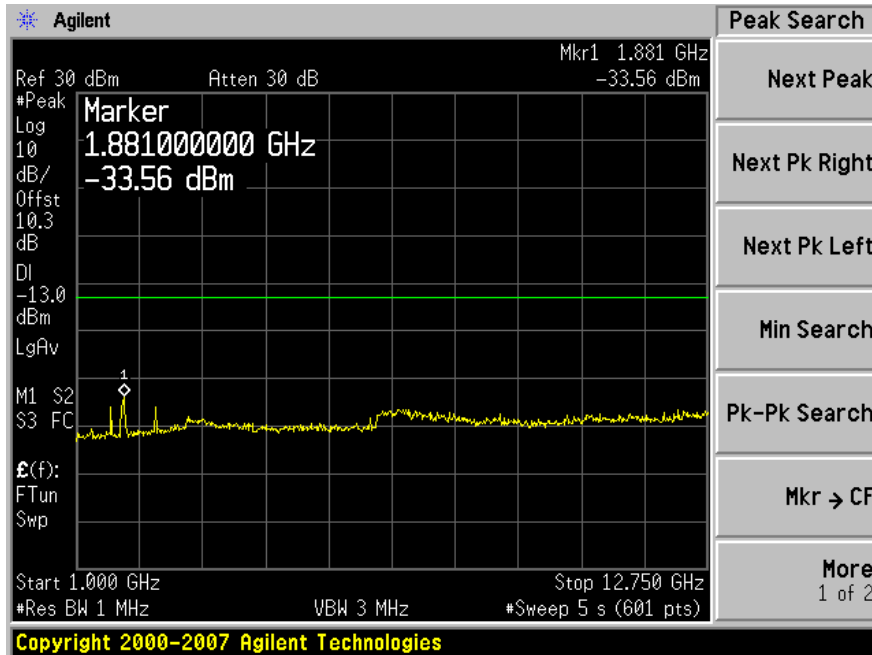


1 GHz to 12.75 GHz

**CDMA 850 MHz band Uplink: Middle Channel (836.4 MHz)**

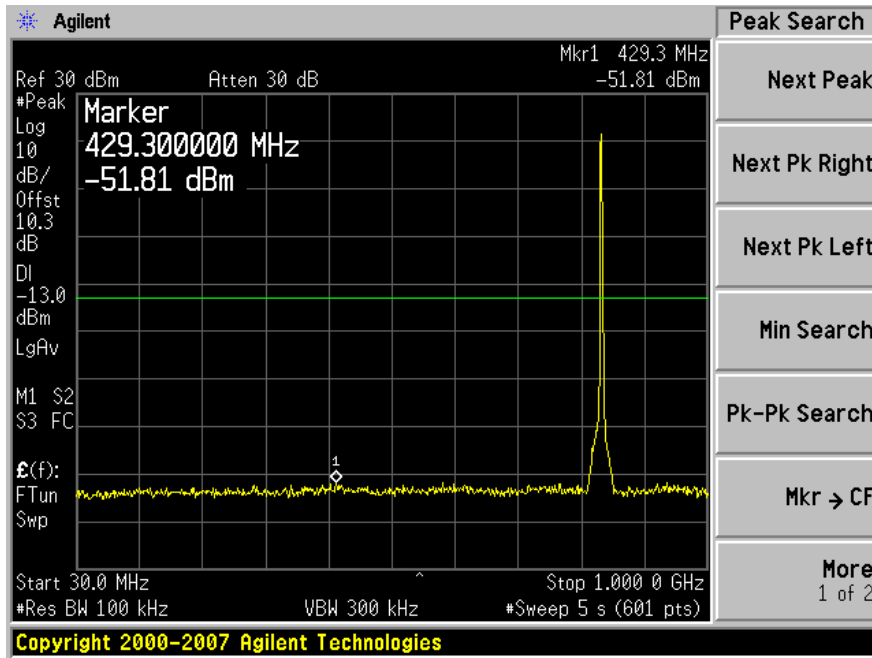


30 MHz to 1 GHz

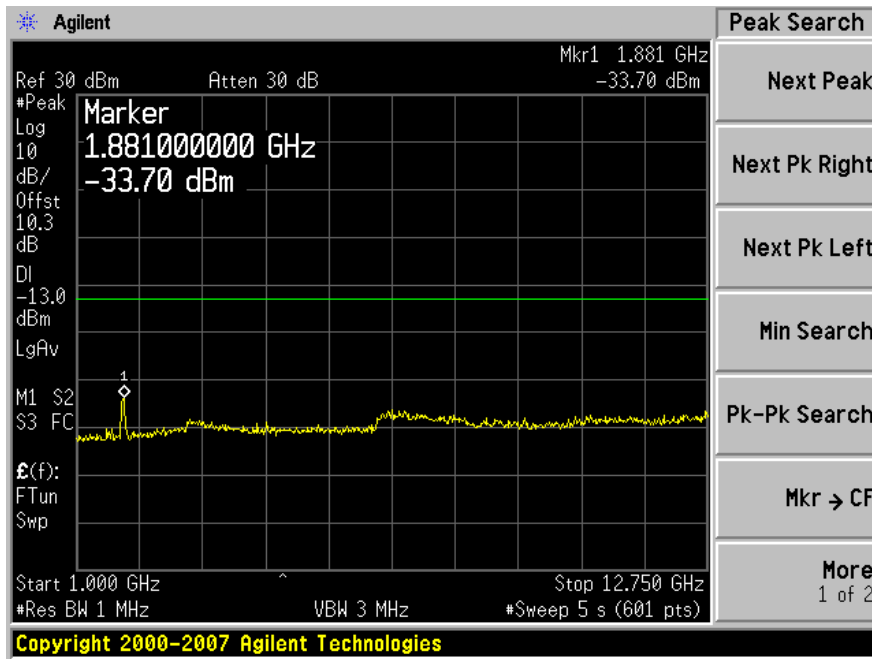


1 GHz to 12.75 GHz

**CDMA 850 MHz band Uplink: High Channel (848.19MHz)**

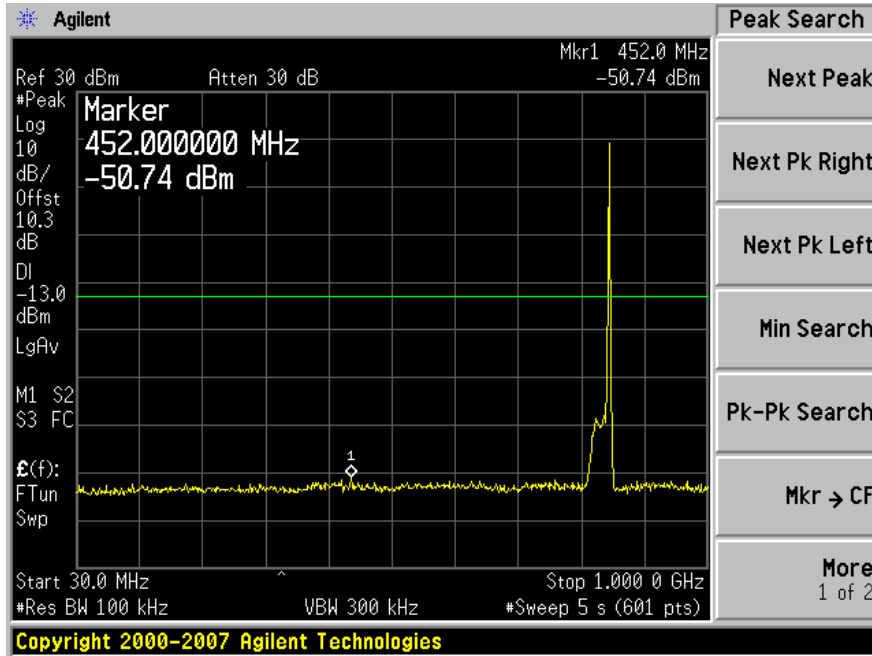


30 MHz to 1 GHz

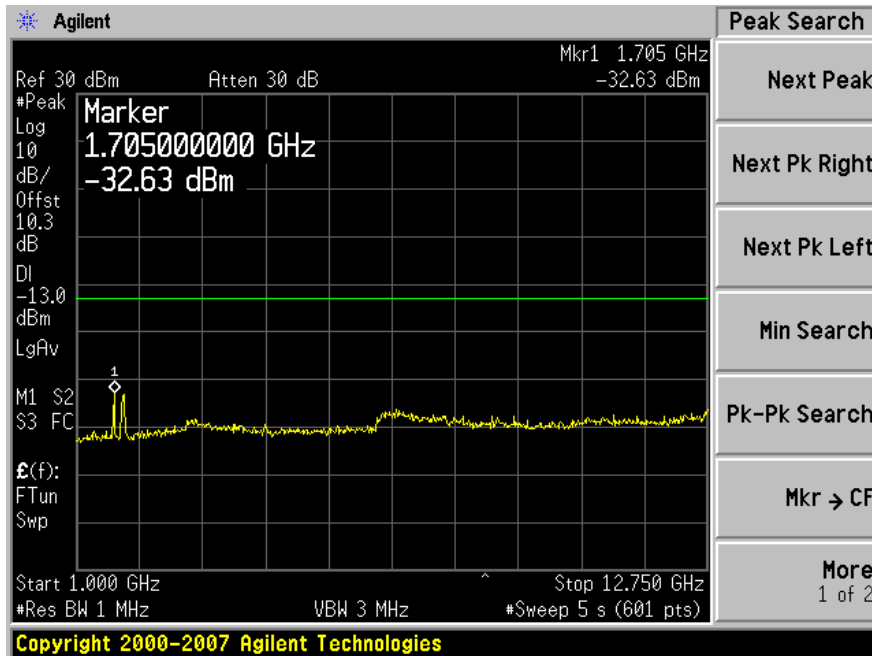


1 GHz to 12.75 GHz

CDMA 850 MHz band Downlink: Low Channel (869.73 MHz)

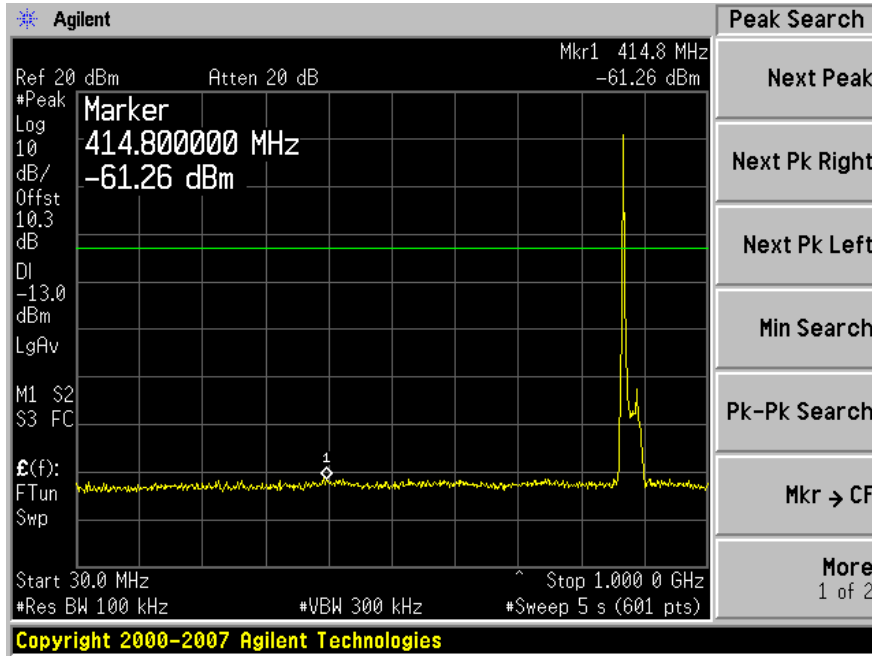


30 MHz to 1 GHz

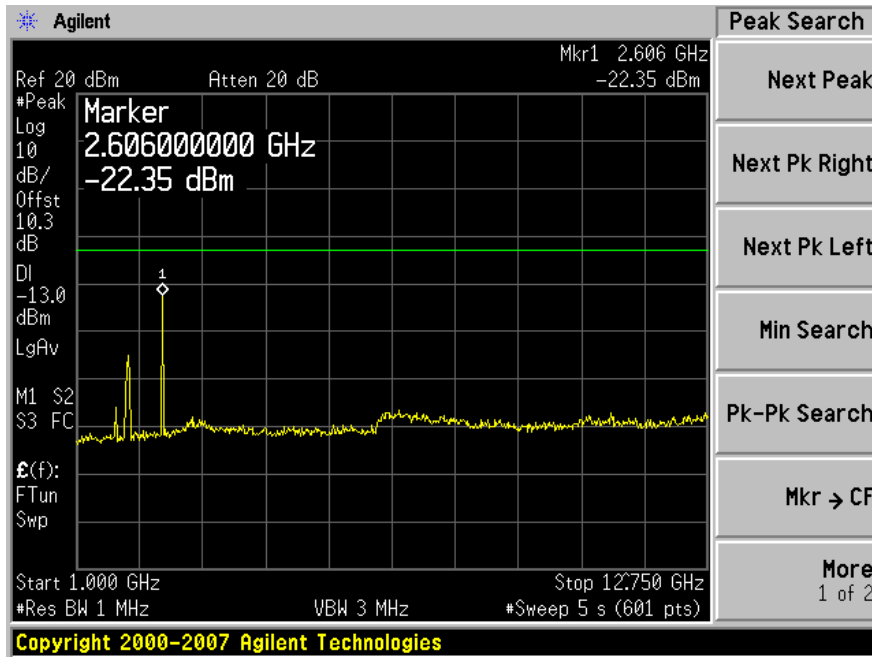


1 GHz to 12.75 GHz

**CDMA 850 MHz band Downlink: Middle Channel (881.4 MHz)**

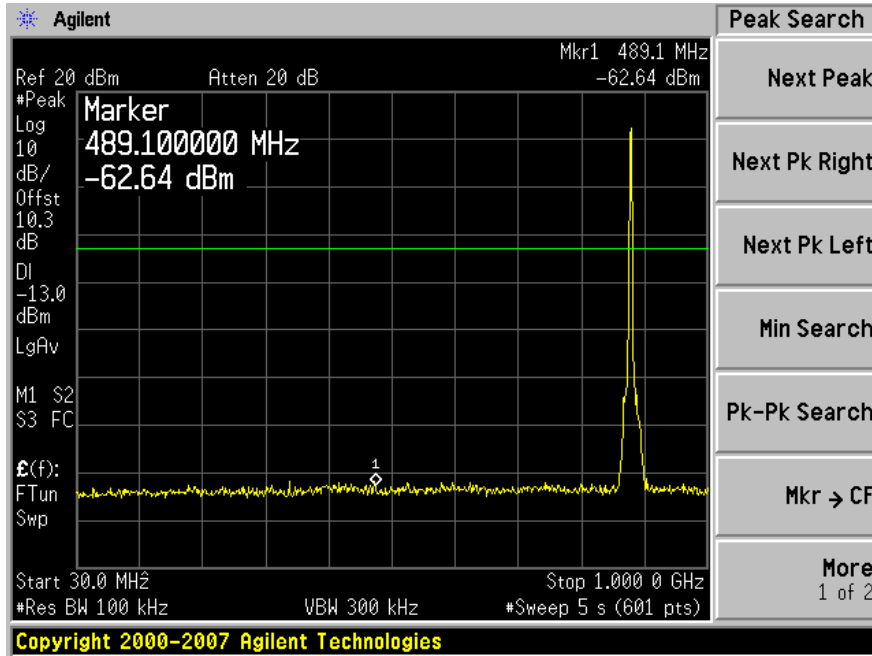


30 MHz to 1 GHz

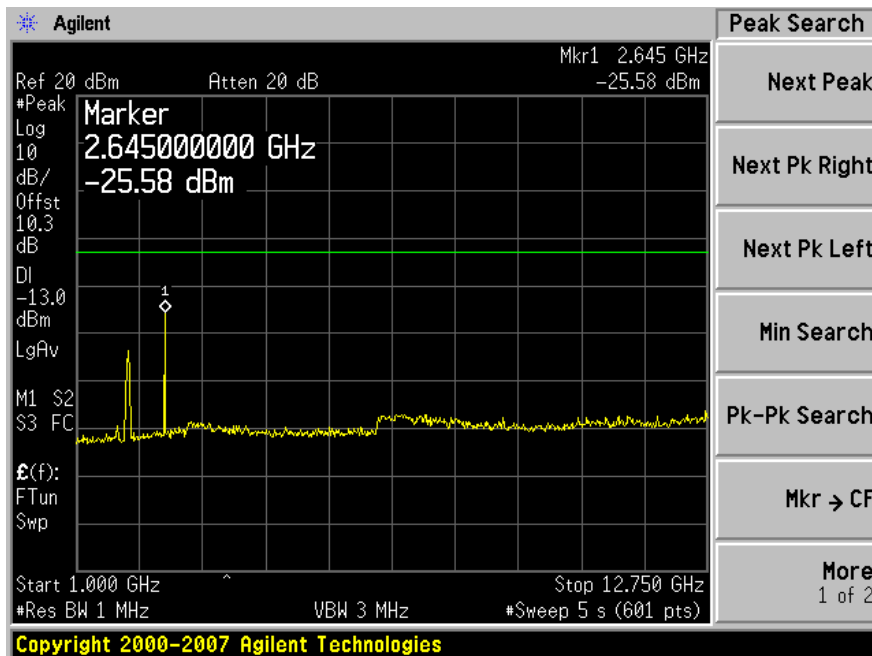


1 GHz to 12.75 GHz

**CDMA850 MHz band Downlink: High Channel (893.19 MHz)**

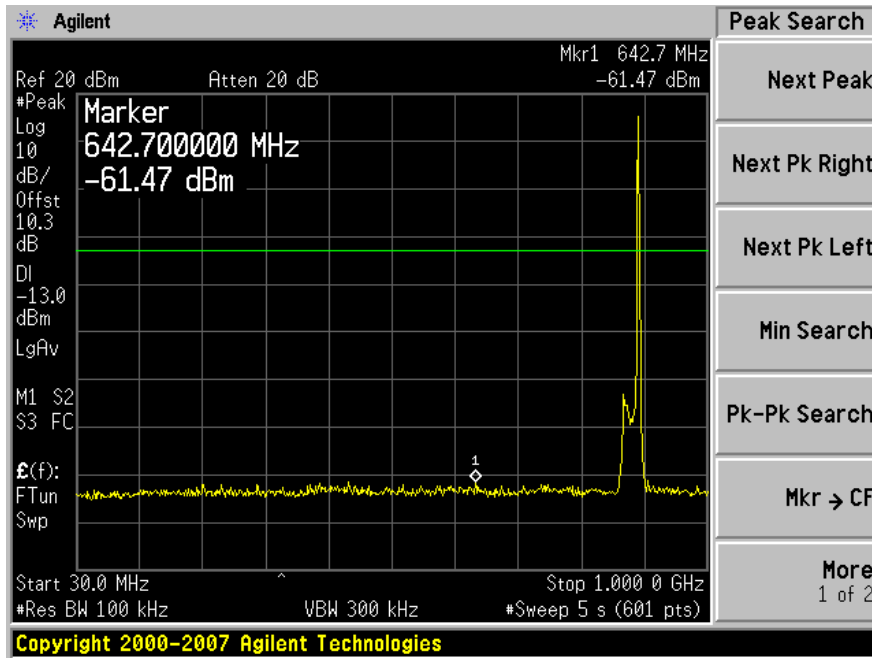


30 MHz to 1 GHz

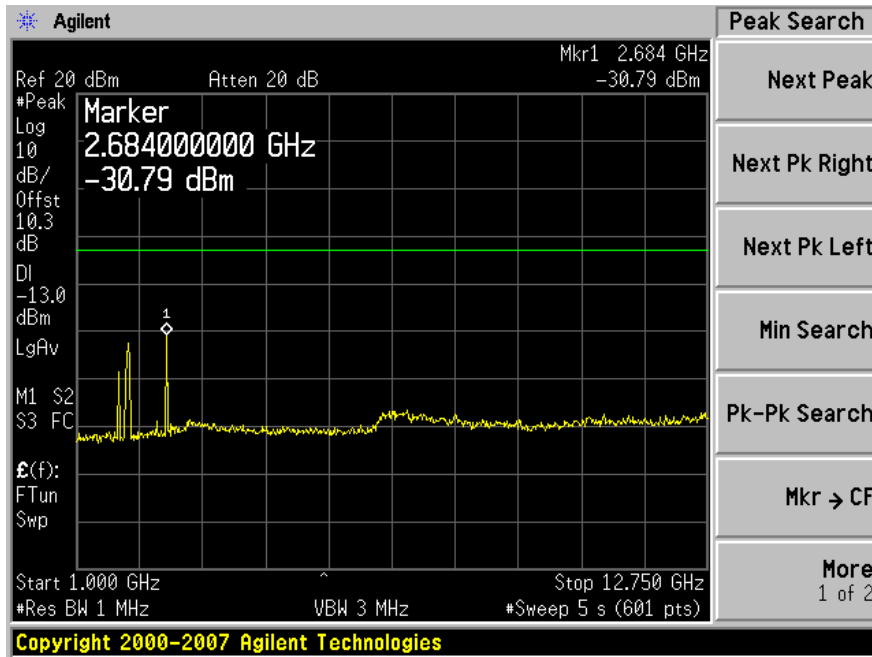


1 GHz to 12.75 GHz

**CDMA 1900 MHz band Uplink: Low Channel (1851.25 MHz)**

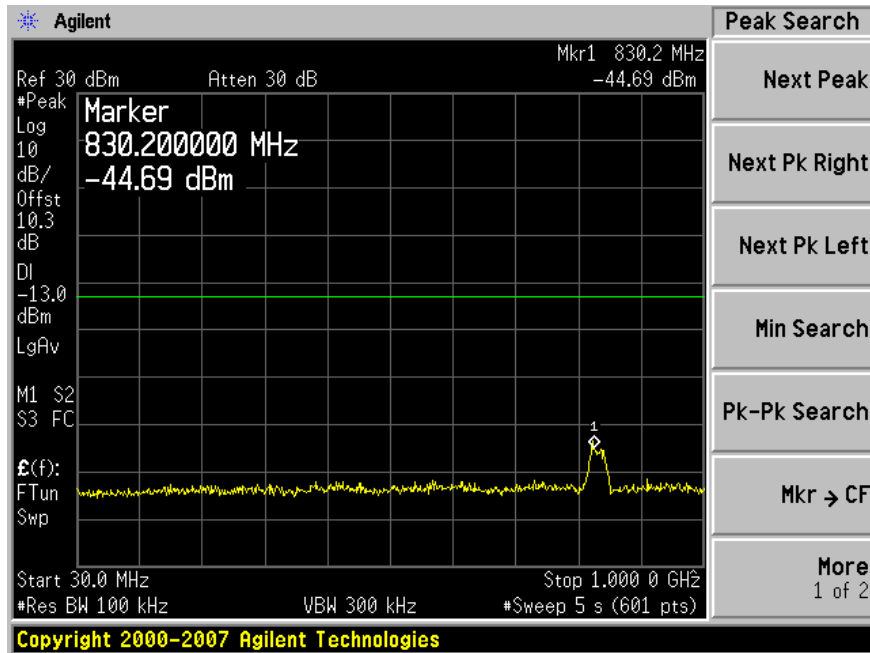


30 MHz to 1 GHz

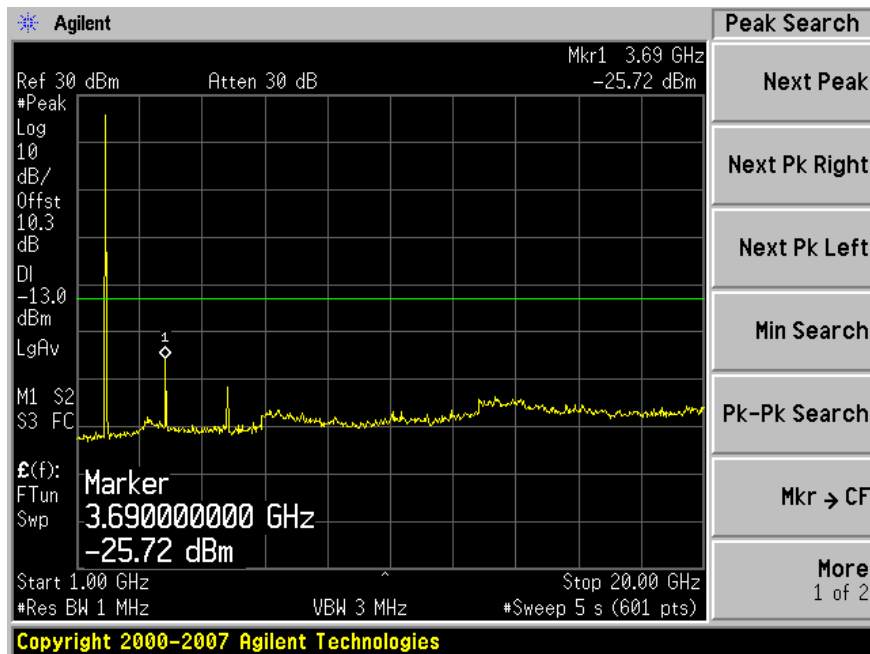


1 GHz to 20 GHz

### CDMA 1900 MHz band Uplink: Middle Channel (1880 MHz)

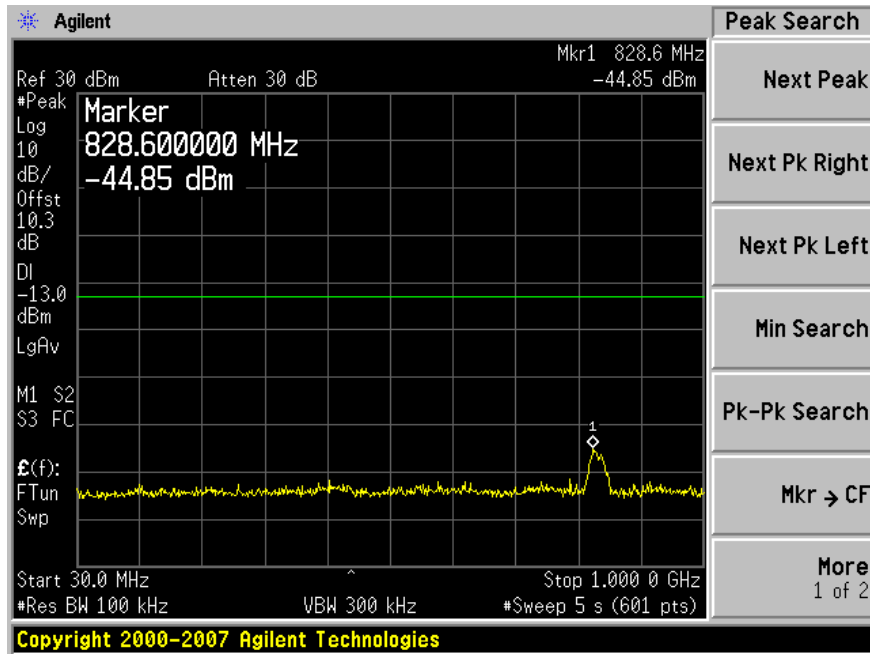


30 MHz to 1 GHz

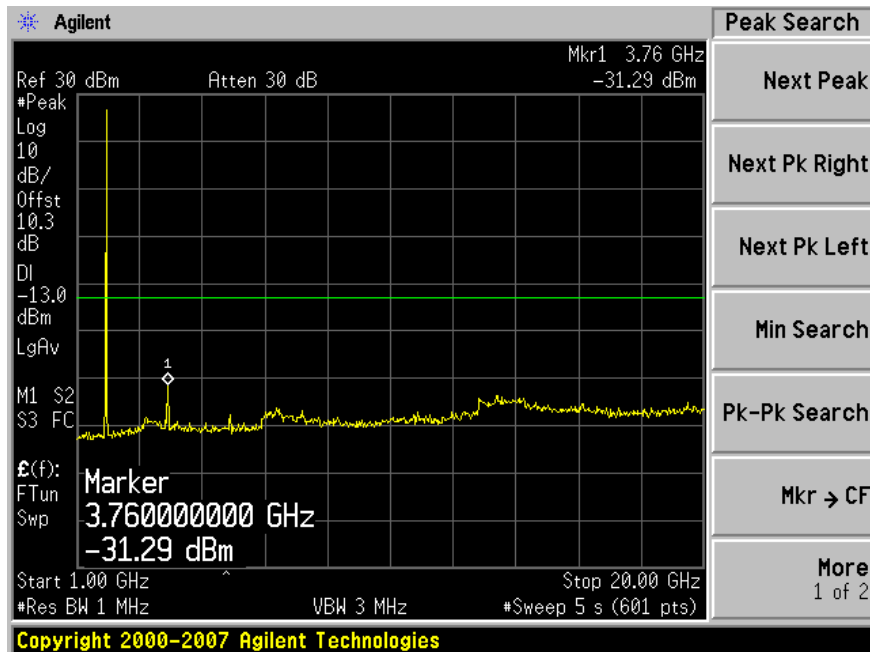


1 GHz to 20 GHz



**CDMA 1900 MHz band Uplink: High Channel (1908.75 MHz)**

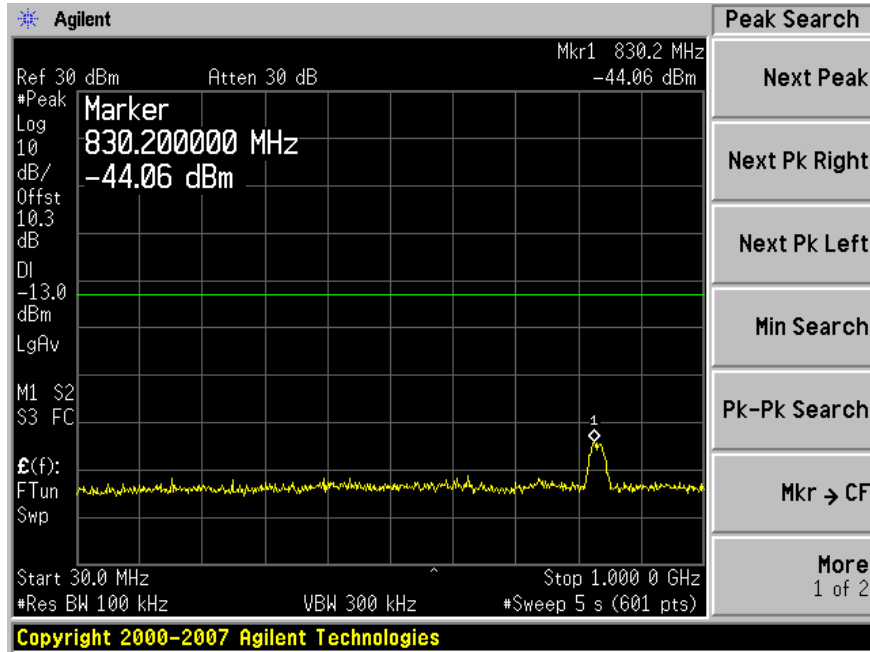


30 MHz to 1 GHz

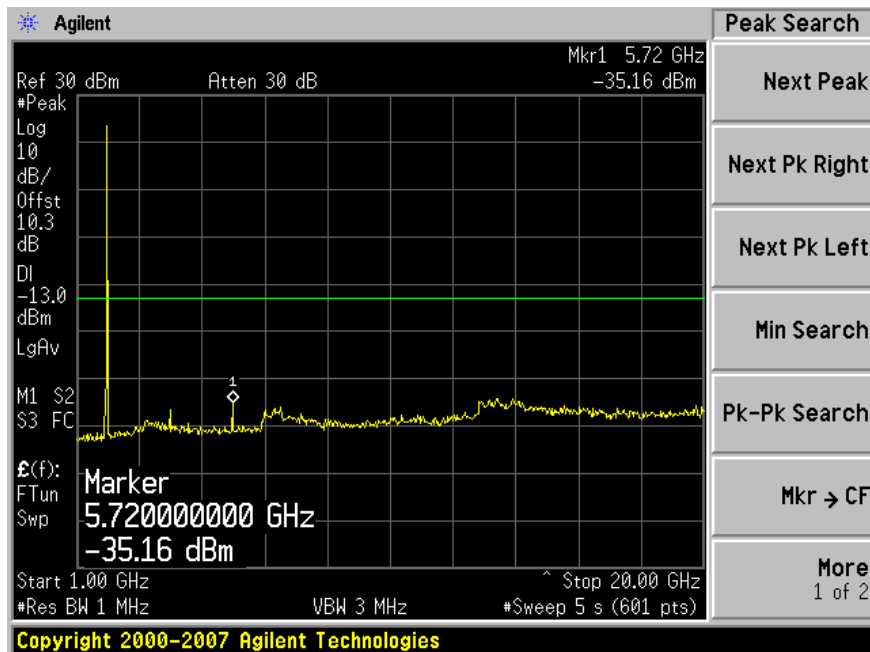


1 GHz to 20 GHz

**CDMA 1900 MHz band Downlink: Low Channel (1931.25 MHz)**

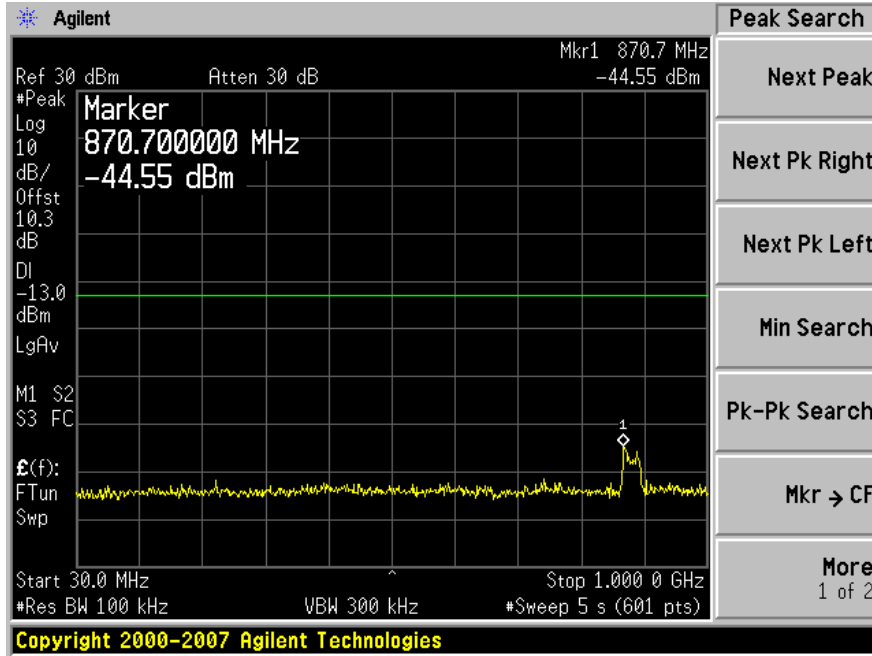


30 MHz to 1 GHz

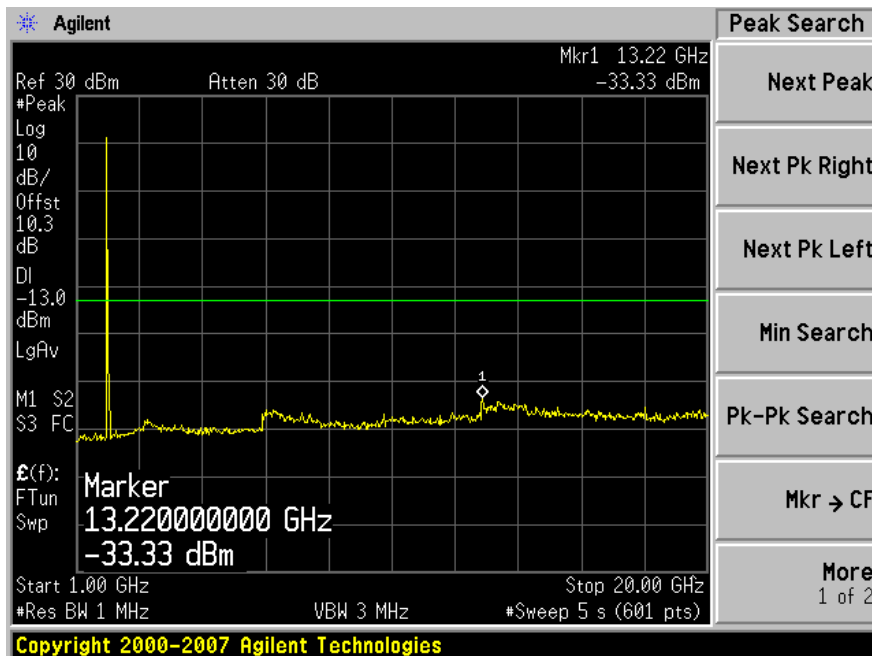


1 GHz to 20 GHz

**CDMA 1900 MHz band Downlink: Middle Channel (1960 MHz)**

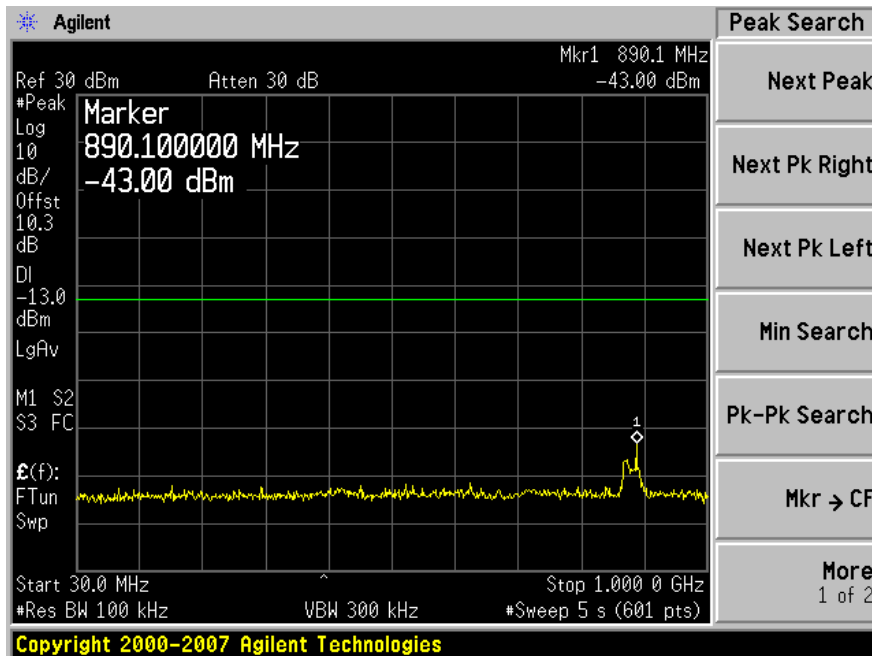


30 MHz to 1 GHz

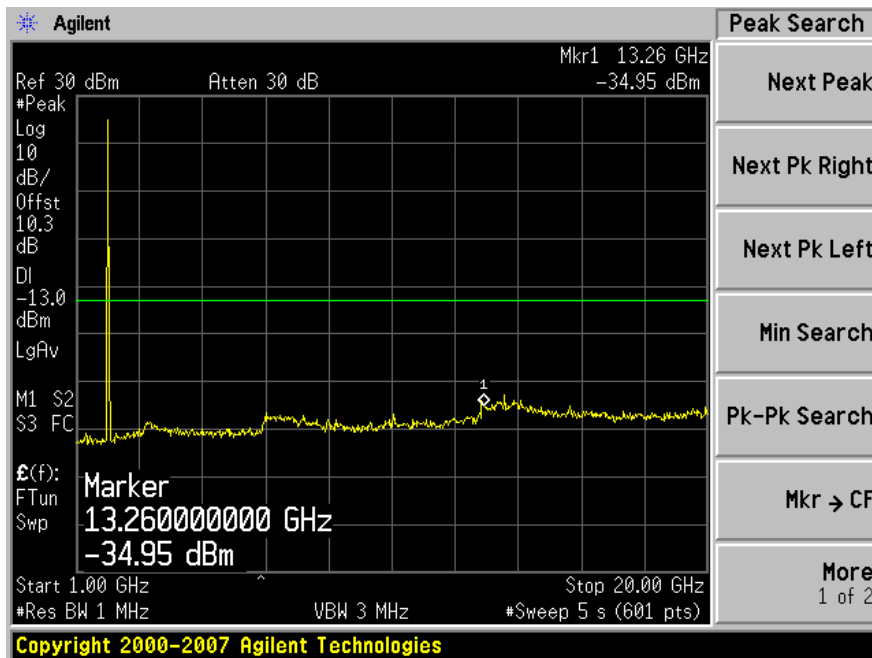


1 GHz to 20 GHz

**CDMA 1900 MHz band Downlink: High Channel (1988.75 MHz)**

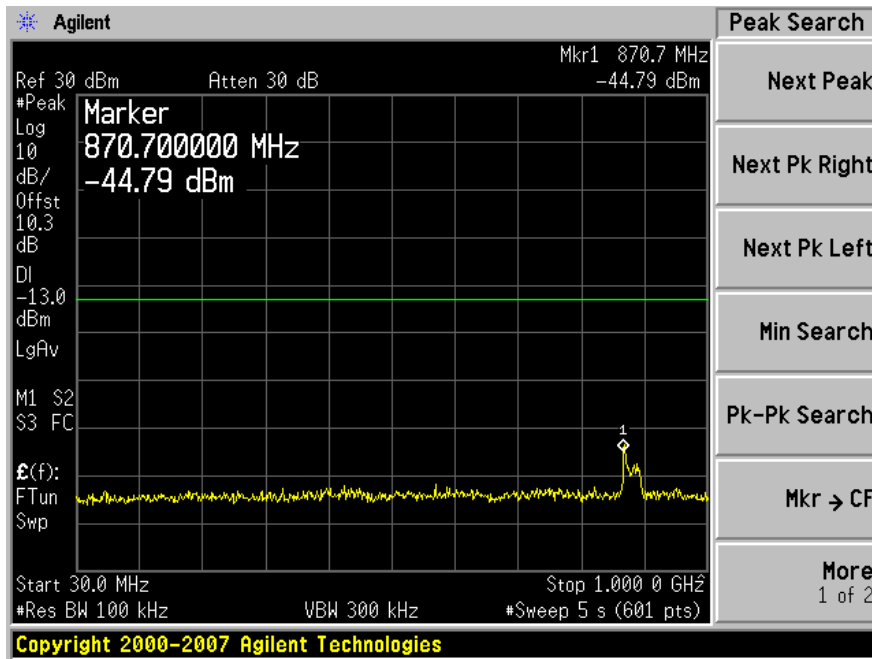

30 MHz to 1 GHz

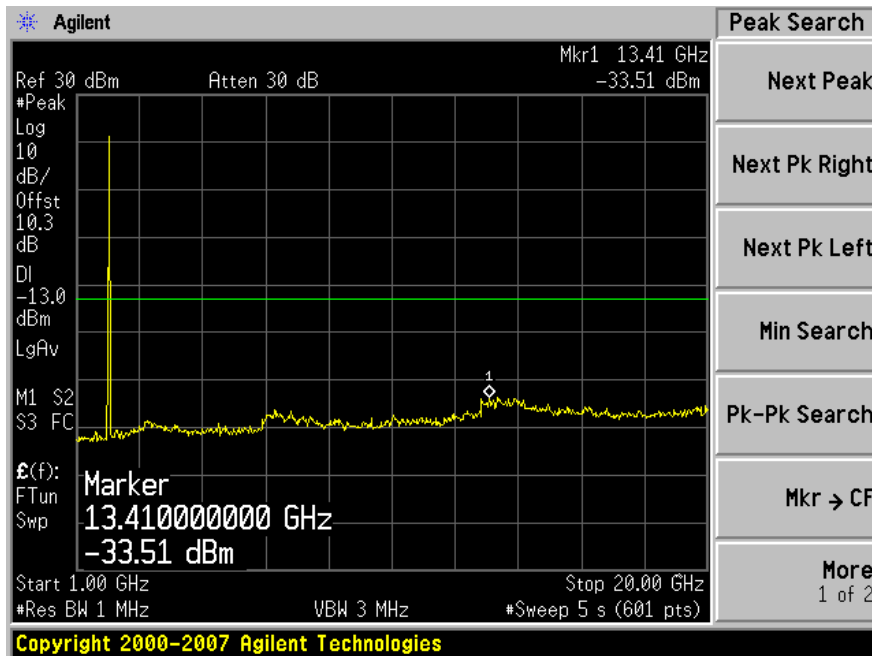

1 GHz to 20 GHz

## 9 §22.917 & §24.238– BAND EDGE

### 9.1 Applicable Standard

According to § 22.917, the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §24.238, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### 9.2 Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

### 9.3 Environmental Conditions

<b>Temperature:</b>	18~22 °C
<b>Relative Humidity:</b>	35~42 %
<b>ATM Pressure:</b>	101.1~101.7 kPa

\* The testing was performed by Jack Liu on 2009-4-29 ~ 2009-5-01

### 9.4 Test Equipment List and Details


Manufacturer	Description	Model	Serial Number	Calibration Date
Rohde & Schwarz	Generator, Signal	SMIQ03	849192/0085	2008-10-14
Agilent	Analyzer, Spectrum	E4440A	US45303156	2008-05-31

\* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.


### 9.5 Test Results

Please refer to the following plots.

**GSM 850 MHz band Uplink Band Edge**

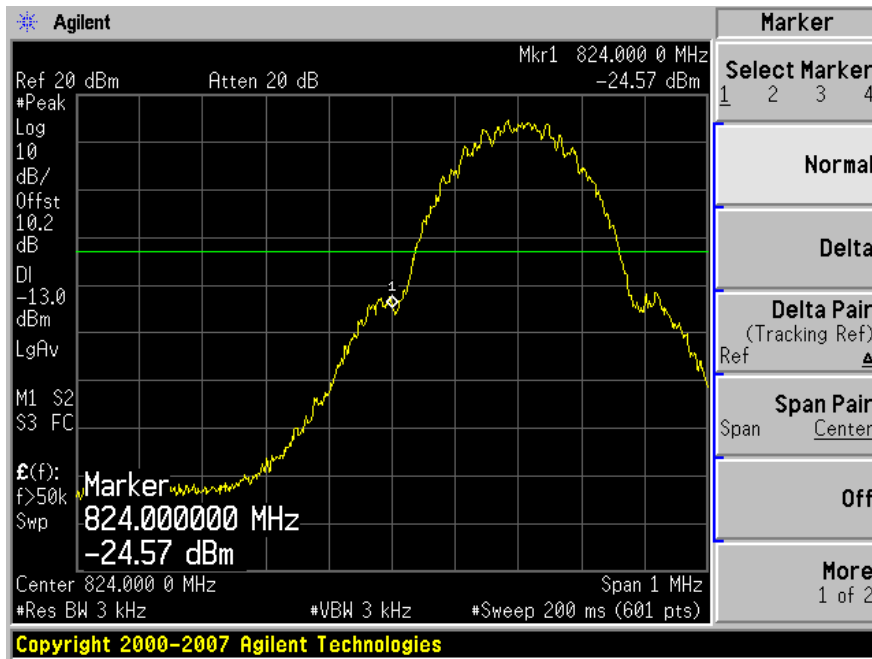


**Low Channel**

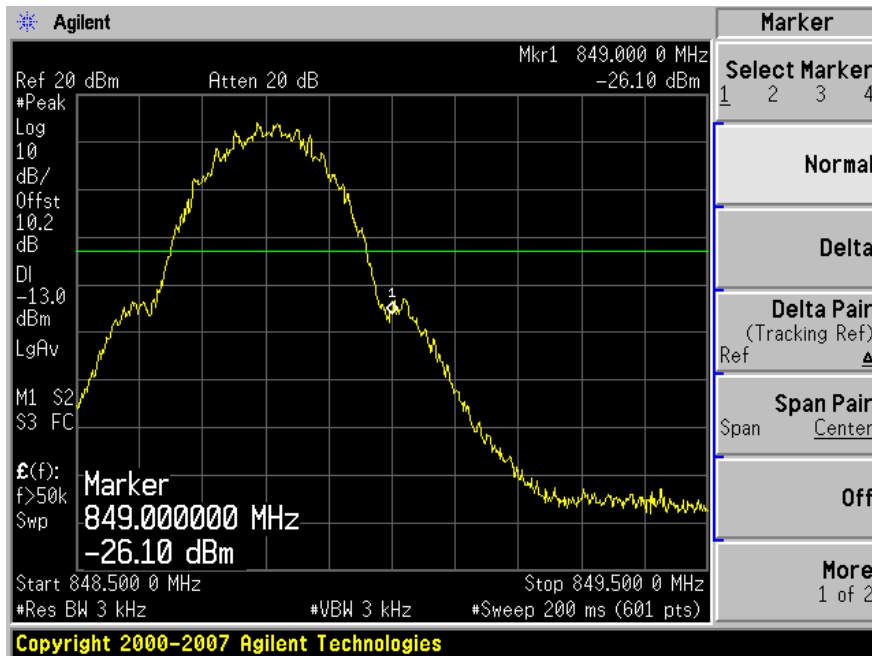


**High Channel**

**GSM 850 MHz band Downlink Band Edge**

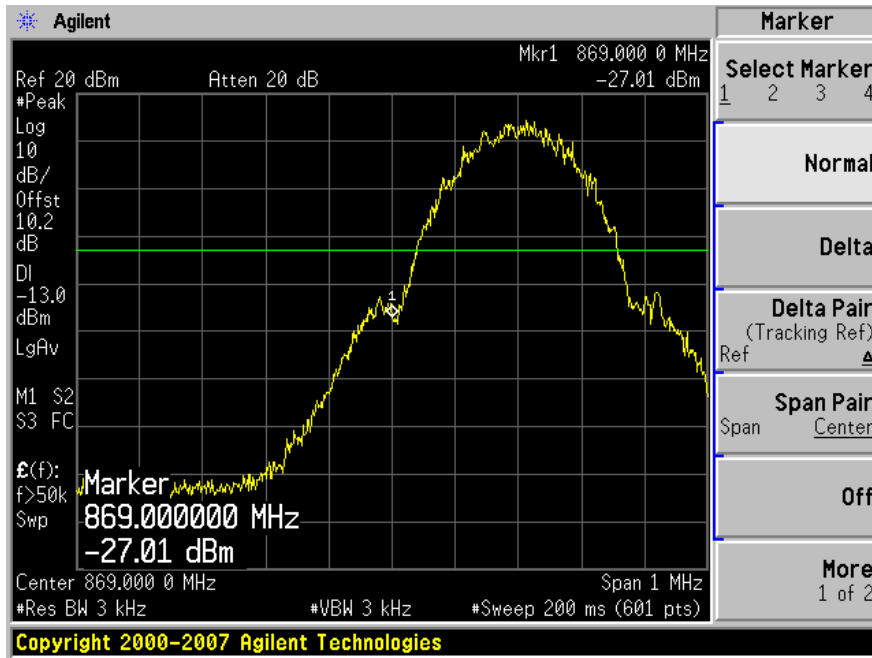


**Low Channel**

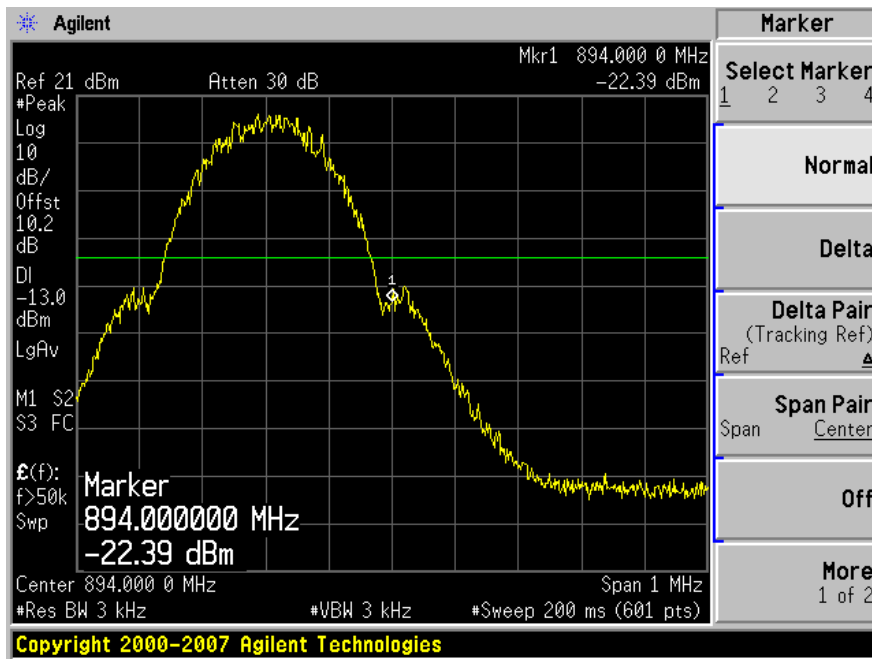


**High Channel**

**GSM 1900 MHz band Uplink Band Edge**

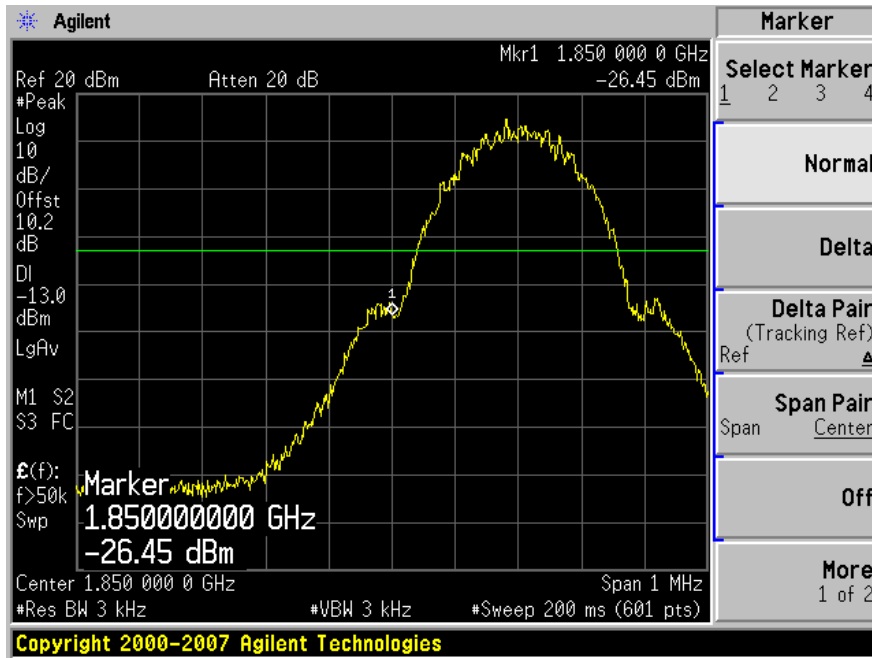


**Low Channel**

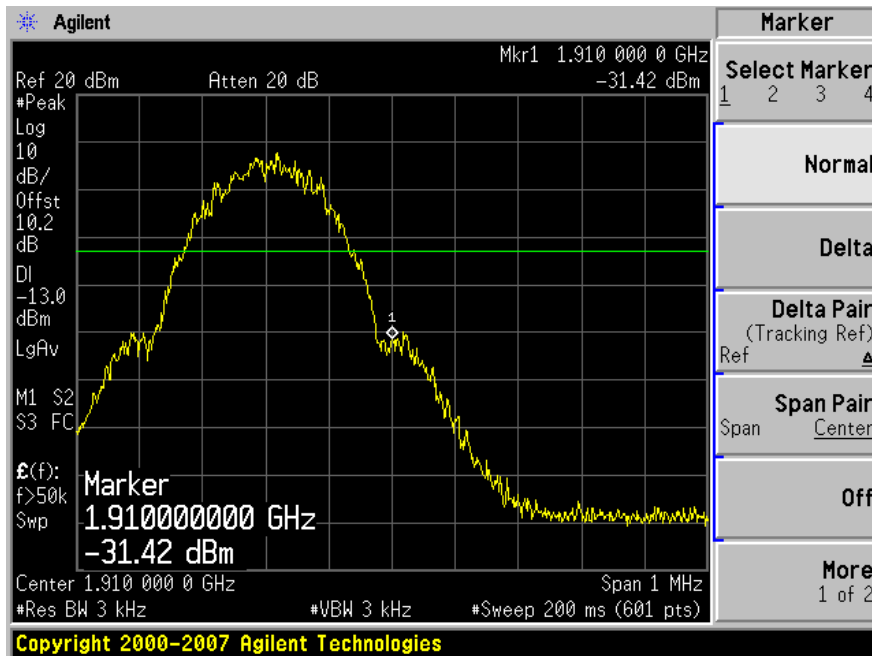


**High Channel**



**GSM 1900 MHz band Downlink Band Edge**

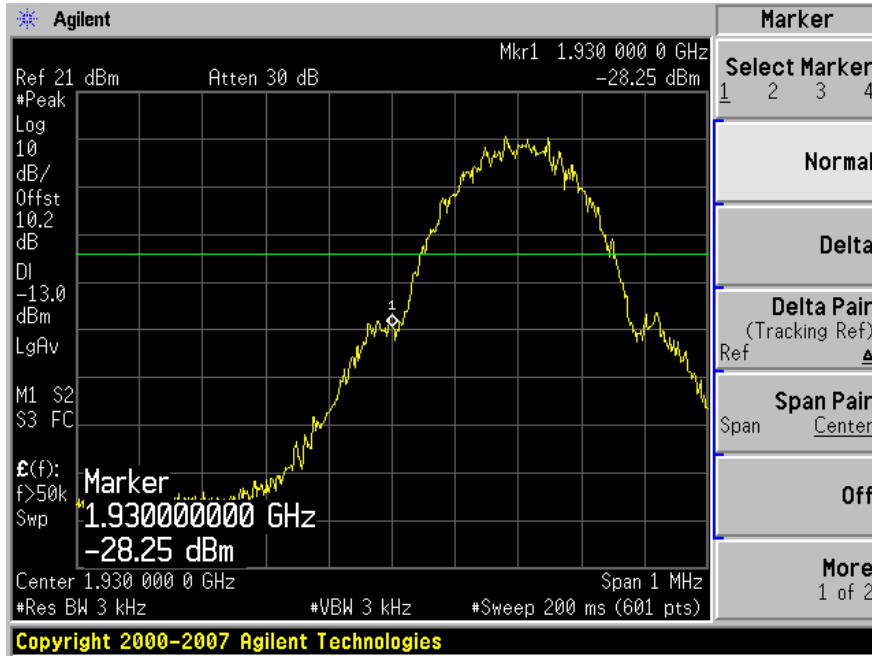


**Low Channel**

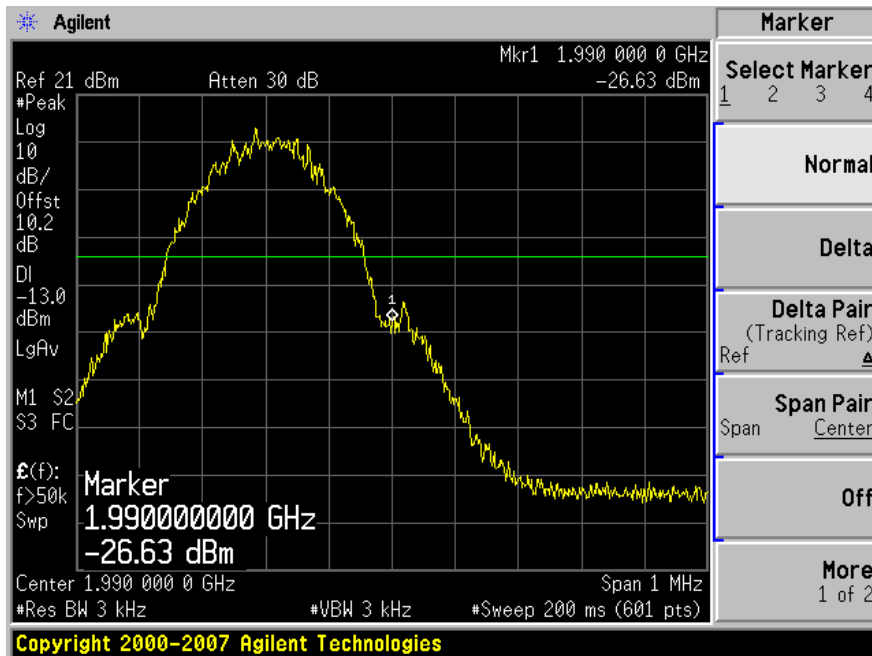


**High Channel**

**CDMA 850 MHz band Uplink Band Edge**

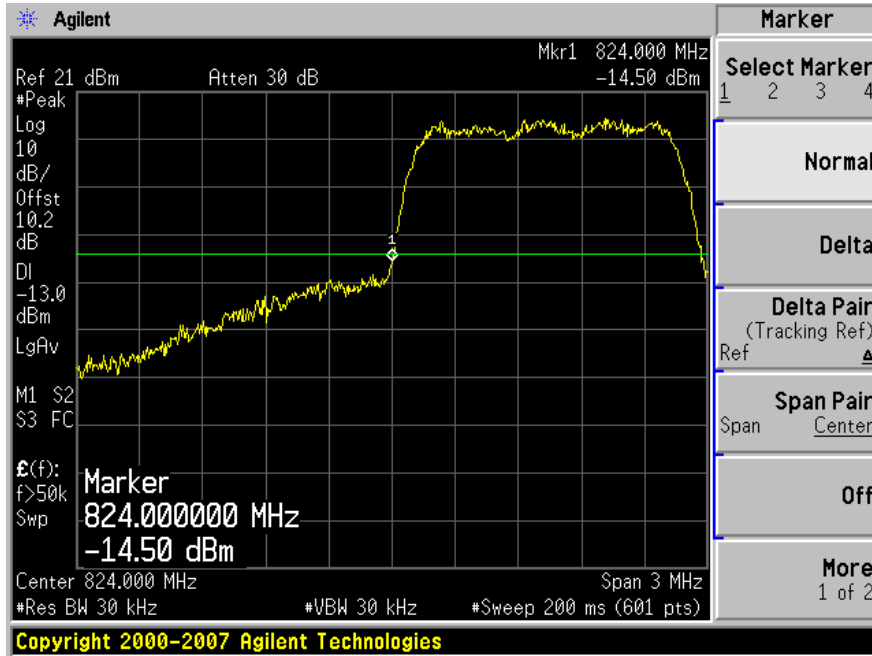


**Low Channel**

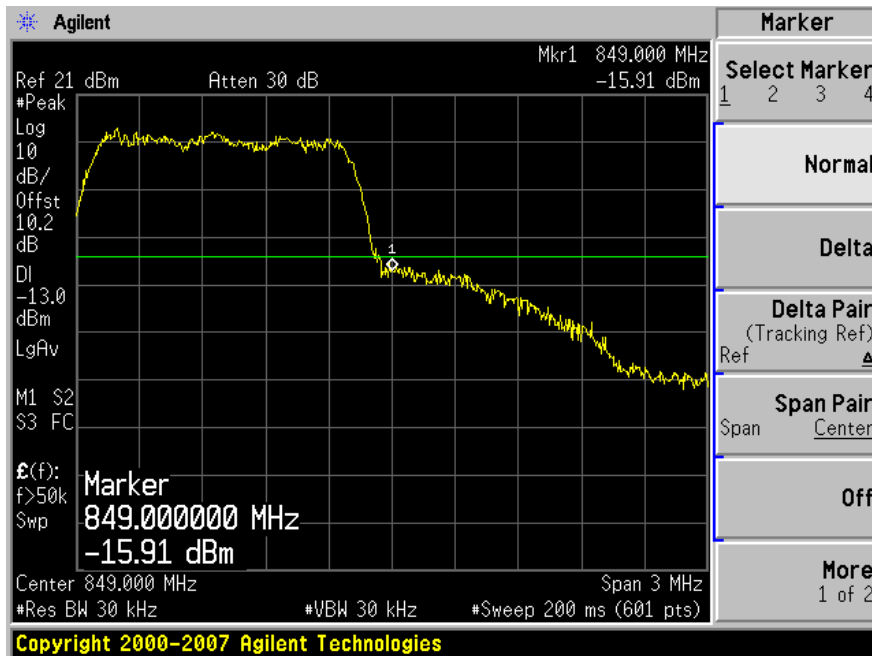


**High Channel**

**CDMA 850 MHz band Downlink Band Edge**

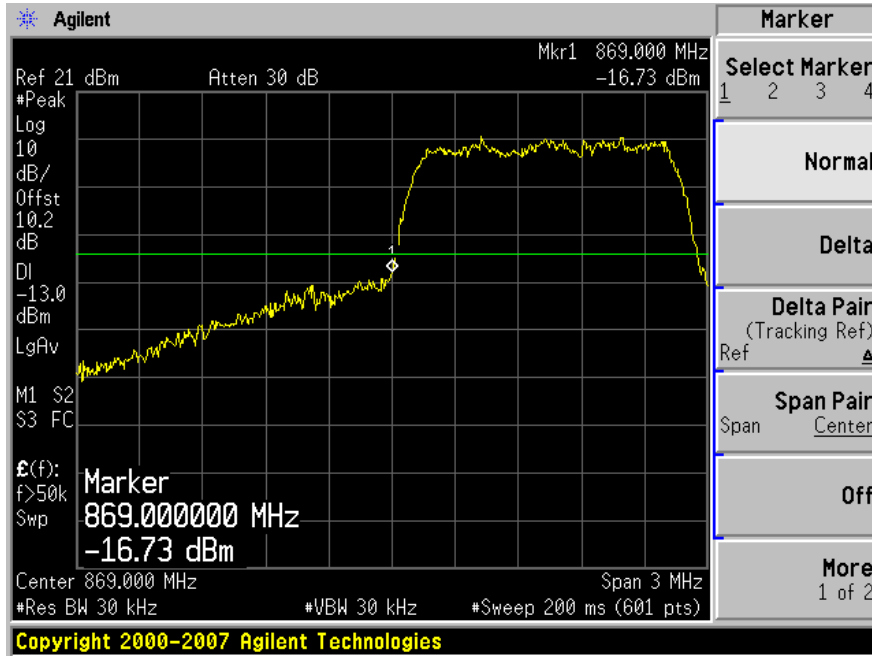


**Low Channel**

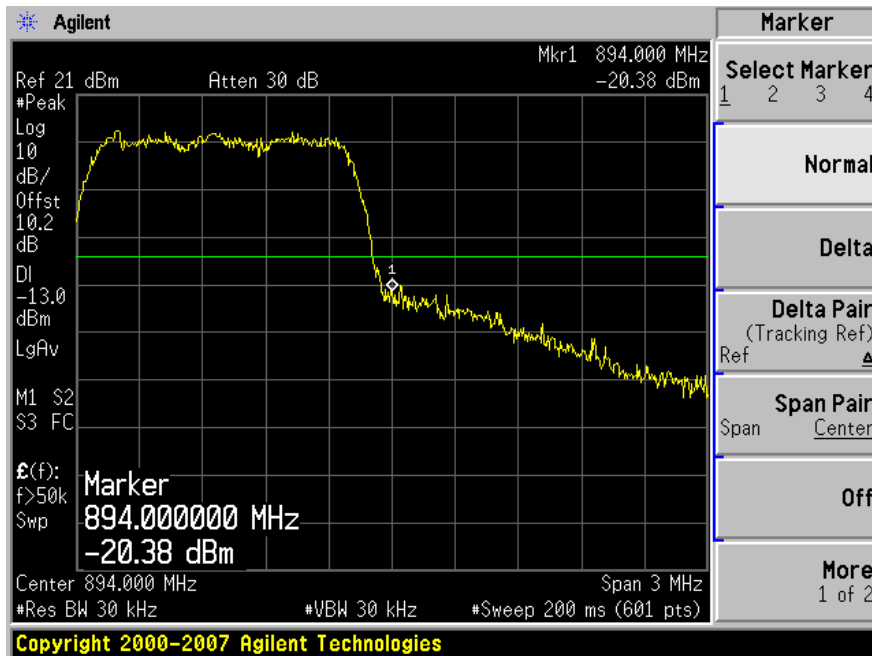


**High Channel**

**CDMA 1900 MHz band Uplink Band Edge**

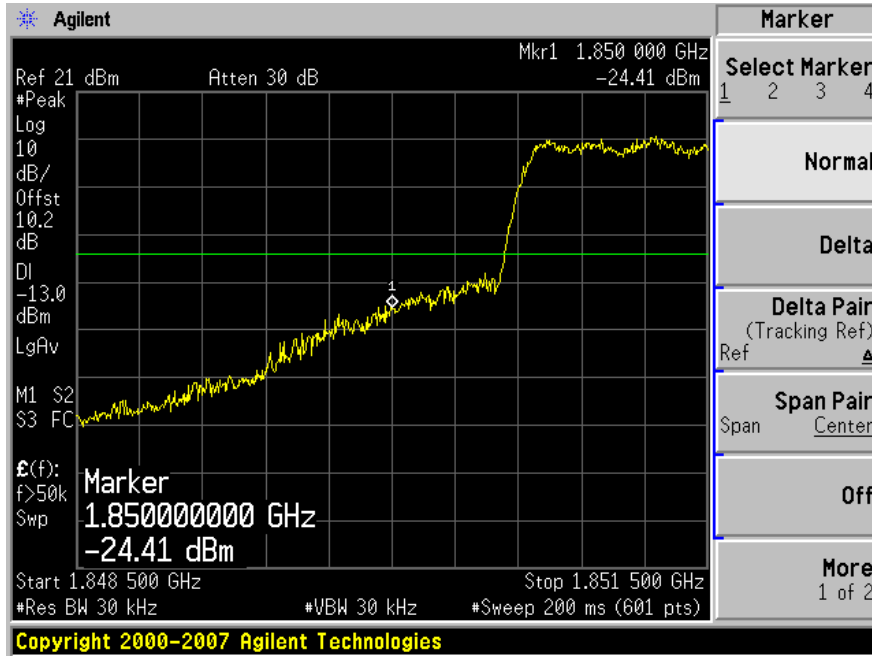


**Low Channel**

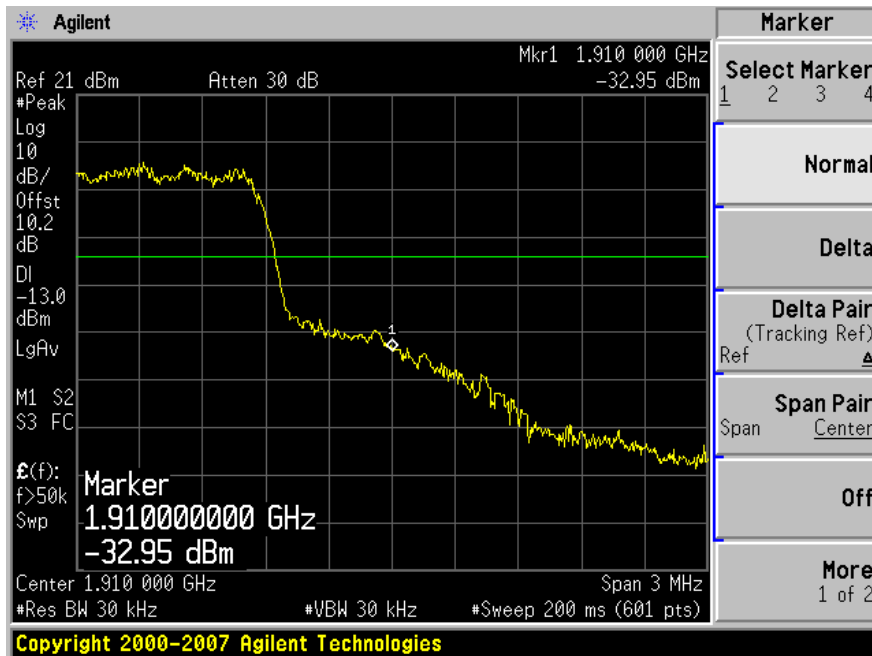


**High Channel**

**CDMA 1900 MHz band Downlink Band Edge**

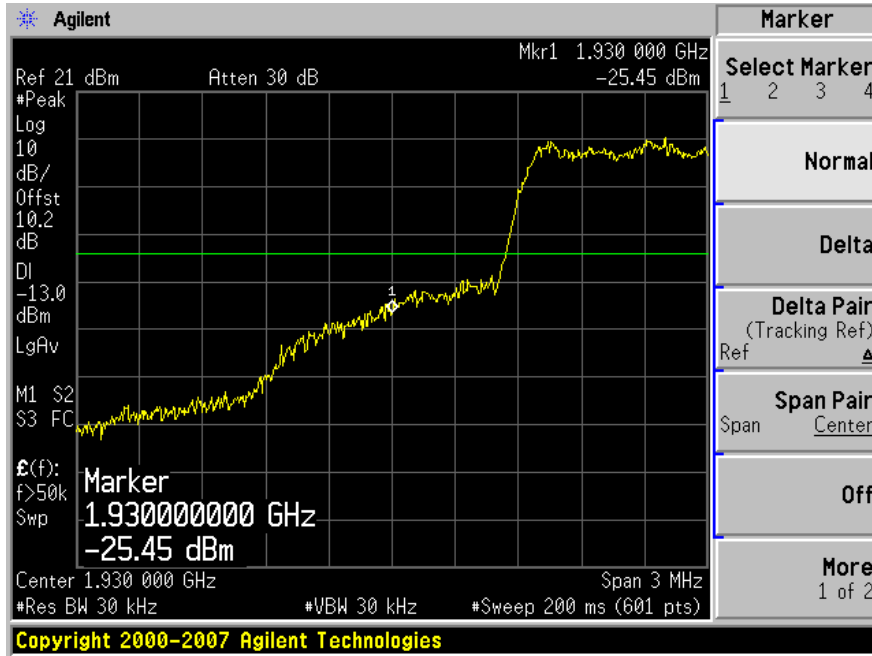

**Low Channel**

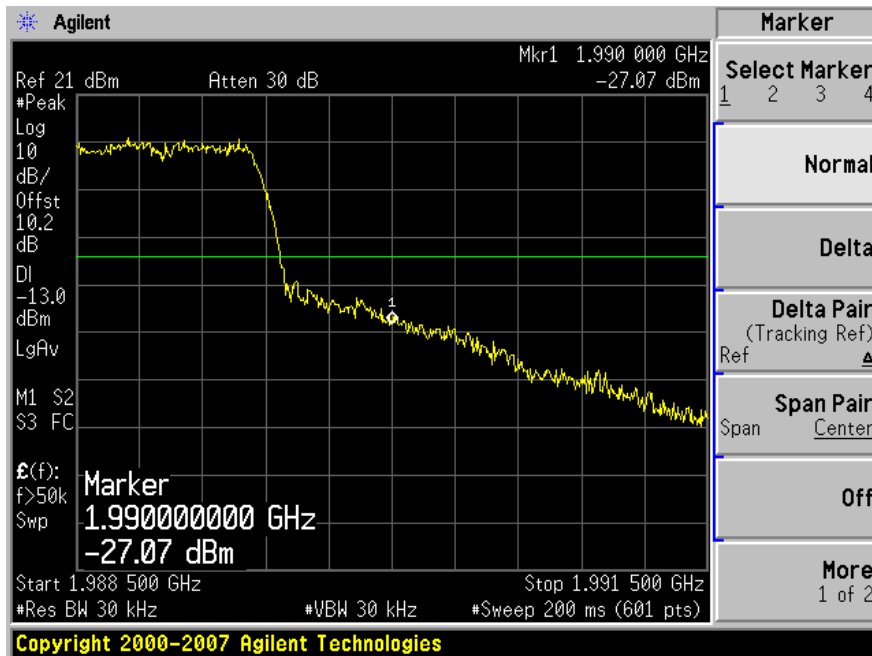

**High Channel**

---

## **10 §2.1055 – Frequency Stability**

---

This EUT is an amplifier, not a transmitter. There is no oscillator circuit in the EUT, therefore there is no frequency stability measurement required.

### **10.1 Test Result**

N/A

## 11 §1.1307(b) (1) & §2.1091 - RF EXPOSURE

### 11.1 Applicable Standard

According to §1.1310 and §2.1091 (Mobile Devices) RF exposure is calculated.

Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minute)
<b>Limits for General Population/Uncontrolled Exposure</b>				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

Note: f = frequency in MHz

\* = Plane-wave equivalent power density

### 11.2 MPE Prediction

Predication of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

#### 850 MHz Cellular Band Uplink:

Maximum peak output power at antenna input terminal (dBm): 22.42

Maximum peak output power at antenna input terminal (mW): 174.58

Prediction distance (cm): 25

Prediction frequency (MHz): 836.6

Antenna Gain, typical (dBi): 9.0

Maximum Antenna Gain (numeric): 7.94

Power density at predication frequency and distance (mW/cm<sup>2</sup>): 0.1765

MPE limit for uncontrolled exposure at predication frequency (mW/cm<sup>2</sup>): 0.558

**850 MHz Cellular Band Downlink:**

Maximum peak output power at antenna input terminal (dBm):	<u>25.28</u>
Maximum peak output power at antenna input terminal (mW):	<u>377.29</u>
Prediction distance (cm):	<u>25</u>
Prediction frequency (MHz):	<u>881.6</u>
Antenna Gain, typical (dBi):	<u>9</u>
Maximum Antenna Gain (numeric):	<u>7.94</u>
Power density at predication frequency and distance (mW/cm <sup>2</sup> ):	<u>0.3410</u>
MPE limit for uncontrolled exposure at predication frequency (mW/cm <sup>2</sup> ):	<u>0.588</u>

**1900 MHz PCS Band Uplink:**

Maximum peak output power at antenna input terminal (dBm):	<u>23.12</u>
Maximum peak output power at antenna input terminal (mW):	<u>205.12</u>
Prediction distance (cm):	<u>25</u>
Prediction frequency (MHz):	<u>1880</u>
Antenna Gain, typical (dBi):	<u>9</u>
Maximum Antenna Gain (numeric):	<u>7.94</u>
Power density at predication frequency and distance (mW/cm <sup>2</sup> ):	<u>0.2074</u>
MPE limit for uncontrolled exposure at predication frequency (mW/cm <sup>2</sup> ):	<u>1.0</u>

**PCS 1900 MHz Band Downlink:**

Maximum peak output power at antenna input terminal (dBm):	<u>23.48</u>
Maximum peak output power at antenna input terminal (mW):	<u>222.84</u>
Prediction distance (cm):	<u>25</u>
Prediction frequency (MHz):	<u>1960</u>
Antenna Gain, typical (dBi):	<u>9</u>
Maximum Antenna Gain (numeric):	<u>7.94</u>
Power density at predication frequency and distance (mW/cm <sup>2</sup> ):	<u>0.2253</u>
MPE limit for uncontrolled exposure at predication frequency (mW/cm <sup>2</sup> ):	<u>1.0</u>

**Test Result**

For Uplink, the highest power density level at 25 cm is 0.2074mW/cm<sup>2</sup>, which is below the uncontrolled exposure limit of 1 mW/cm<sup>2</sup> at 1880 MHz.

For Downlink, the highest power density level at 25 cm is 0.3410mW/cm<sup>2</sup>, which is below the uncontrolled exposure limit of 0.588mW/cm<sup>2</sup> at 881.6 MHz.

So the indoor antenna prediction distance should be greater then 25 cm, and outdoor antenna prediction distance should be greater then 25 cm.