

TEST AND MEASUREMENT REPORT



For

Cellphone-Mate, Inc.

48820 Kato Road, Suite 300B,

Fremont, CA 94539, USA

FCC ID: RSNDUAL-85UNDER

Report Type: Original Report	Product Type: Universal Building Repeater
Test Engineer: <u>Lionel Lara</u> 	
Report Number: <u>R1108101-2224</u>	
Report Date: <u>2011-09-27</u>	
Reviewed By: <u>Victor Zhang</u>  Test Engineer, Lead	
Prepared By: Bay Area Compliance Laboratories Corp. (SP) 1274 Anvilwood Ave., Sunnyvale, CA 94089, USA Tel: (408) 732-9162 Fax: (408) 732 9164	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "*" ...

TABLE OF CONTENTS

1	GENERAL INFORMATION	5
1.1	PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
1.2	MECHANICAL DESCRIPTION	5
1.3	OBJECTIVE.....	5
1.4	RELATED SUBMITTAL(S)/GRANT(S).....	5
1.5	TEST METHODOLOGY	5
1.6	MEASUREMENT UNCERTAINTY.....	6
1.7	TEST FACILITY.....	6
2	SYSTEM TEST CONFIGURATION	7
2.1	JUSTIFICATION.....	7
2.2	EUT EXERCISE SOFTWARE.....	7
2.3	EQUIPMENT MODIFICATIONS	7
2.4	POWER SUPPLY AND LINE FILTERS.....	7
2.5	INTERNAL CONFIGURATION.....	7
2.6	LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	7
2.7	INTERFACE PORTS AND CABLING	7
3	SUMMARY OF TEST RESULTS.....	8
4	FCC §2.1046, §22.913(A) & §24.232 – RF OUTPUT POWER	9
4.1	APPLICABLE STANDARD	9
4.2	TEST PROCEDURE	9
4.3	TEST ENVIRONMENTAL CONDITIONS.....	9
4.4	TEST EQUIPMENT LIST AND DETAILS	9
4.5	TEST RESULTS	10
5	FCC §2.1047 - MODULATION CHARACTERISTIC.....	12
5.1	APPLICABLE STANDARD	12
5.2	TEST RESULT	12
6	FCC §2.1049, §22.917 & §24.238 - OCCUPIED BANDWIDTH.....	13
6.1	APPLICABLE STANDARD	13
6.2	TEST PROCEDURE	13
6.3	TEST ENVIRONMENTAL CONDITIONS.....	13
6.4	TEST EQUIPMENT LIST AND DETAILS	13
6.5	TEST RESULTS	14
7	FCC §2.1053, §22.917 & §24.238 - SPURIOUS RADIATED EMISSIONS.....	31
7.1	APPLICABLE STANDARD	31
7.2	TEST PROCEDURE	31
7.3	TEST ENVIRONMENTAL CONDITIONS.....	31
7.4	TEST EQUIPMENT LIST AND DETAILS	32
7.5	SUMMARY OF TEST RESULTS.....	32
7.6	TEST RESULTS	33
8	FCC §2.1051, §22.917 & §24.238 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	34
8.1	APPLICABLE STANDARD	34
8.2	TEST PROCEDURE	34
8.3	TEST ENVIRONMENTAL CONDITIONS.....	34
8.4	TEST EQUIPMENT LIST AND DETAILS	34

8.5	TEST RESULTS	34
9	FCC §22.917 & §24.238 – BAND EDGE.....	75
9.1	APPLICABLE STANDARD	75
9.2	TEST PROCEDURE	75
9.3	TEST ENVIRONMENTAL CONDITIONS	75
9.4	TEST EQUIPMENT LIST AND DETAILS	75
9.5	TEST RESULTS	75
10	FCC §2.1055, §22.355 & §24.235 – FREQUENCY STABILITY.....	92
10.1	TEST RESULT	92
11	FCC §1.1307(B)(1) & §2.1091 - RF EXPOSURE INFORMATION.....	93
11.1	APPLICABLE STANDARD	93
11.2	MPE PREDICTION	93
12	EXHIBIT A - FCC ID LABELING REQUIREMENTS	95
12.1	FCC ID LABEL REQUIREMENTS.....	95
12.2	FCC ID LABEL CONTENTS	95
12.3	FCC LABEL LOCATION ON EUT	96
13	EXHIBIT B - TEST SETUP PHOTOGRAPHS.....	97
13.1	RADIATED EMISSIONS - FRONT VIEW	97
13.2	RADIATED EMISSIONS - REAR VIEW (BELOW 1 GHz).....	97
13.3	RADIATED EMISSIONS - REAR VIEW (ABOVE 1 GHz).....	98
13.4	CONDUCTED MEASUREMENT VIEW	98
14	EXHIBIT C – EUT PHOTOGRAPHS.....	99
14.1	EUT - TOP VIEW.....	99
14.2	EUT - BOTTOM VIEW	99
14.3	EUT - SIDE VIEW (1)	100
14.4	EUT - SIDE VIEW (2)	100
14.5	EUT - PORT VIEW (1)	101
14.6	EUT – PORT VIEW (2)	101
14.7	EUT – COVER OFF VIEW.....	102
14.8	EUT – PCB BOARD ASSEMBLY TOP VIEW	102
14.9	EUT – PCB BOARD ASSEMBLY BOTTOM VIEW	103
14.10	EUT – AC/DC ADAPTER VIEW	103

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R1108101-2224	Original Report	2011-09-27

1 GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

The Cellphone-Mate Inc's product, model: CM2020, FCC ID: RSNDUAL-85UNDER or the "EUT" as referred to in this report, is a Universal Building Repeater with N female type antenna connector operates in Cellular and PCS bands.

General Specifications:

- Operating Frequency: *Downlink:* 869-894 MHz and 1930-1990 MHz
Uplink: 824-849 MHz and 1850-1910 MHz
- Emission Designator: F9W, GXW, G7W
- Modulation: GSM, EDGE, CDMA, WCDMA
- Power Source: Input: 110V/60Hz; Output: DC 9V

1.2 Mechanical Description

The EUT dimension is approximately 22.5cm (L) x 19cm (W) x 4.5cm (H) and weighs approximately 2140g.

The test data gathered are from production sample, serial number: CM110815-Z0195, provided by the manufacturer.

1.3 Objective

This type approval report is prepared on behalf of Cellphone-Mate, Inc. in accordance with Part 2, Subpart J, Part 22 Subpart H, and Part 24 Subpart E, of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC rules for RF output power, modulation characteristic, occupied bandwidth, spurious emissions at antenna terminal, field strength of spurious radiation, frequency stability, band edge, and conducted and radiated margin.

1.4 Related Submittal(s)/Grant(s)

No Related Submittals

1.5 Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services
Part 24 Subpart E - PCS

Applicable Standards: TIA EIA 98-C, TIA/EIA 603-C, ANSI C63.4-2003.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the values ranging from +2.0 dB for Conducted Emissions tests and +4.0 dB for Radiated Emissions tests are the most accurate estimates pertaining to uncertainty of EMC measurements at BACL Corp.

Detailed instrumentation measurement uncertainties can be found in BACL Corp. report QAP-018.

1.7 Test Facility

The test site used by BACL Corp. to collect radiated and conducted emissions measurement data is located at its facility in Sunnyvale, California, USA.

The test sites at BACL have been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and

December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission, Industry Canada, and Voluntary Control Council for Interference has the reports on file and is listed under FCC registration number: 90464, IC registration number: 3062A, and VCCI Registration Number: C-2463 and R-2698. The test site has been approved by the FCC, IC, and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200167-0). The current scope of accreditations can be found at <http://ts.nist.gov/ts/htdocs/210/214/scopes/2001670.htm>

2 SYSTEM TEST CONFIGURATION

2.1 Justification

The EUT was configured for testing according to TIA/EIA-603-C.

The final qualification test was performed with the EUT operating at normal mode.

2.2 EUT Exercise Software

NA, signal was sent through EUT using a signal generator, device was set to normal operating mode.

2.3 Equipment Modifications

No modifications were made to the EUT.

2.4 Power Supply and Line Filters

Manufacturer	Description	Model	Serial Number
Oriental Hero ELE. FTY.	AC/DC Switch Adapter	OH-1048A0904000U-U	-

2.5 Internal Configuration

Manufacturer	Description	Model	Serial Number
Cellphone-Mate Inc.	PCB Board	CM2020-75 WL V1.0	-

2.6 Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Signal Generator	SMIQ03	849192/0085
Agilent	ESG-D Series Signal Generator	E4438C	MY45091309

2.7 Interface Ports and Cabling

Cable Description	Length (m)	From	To
RF cable	< 3m	Signal Generator	Input/ EUT
RF cable	< 3m	Output/ EUT	Spectrum analyzer

3 SUMMARY OF TEST RESULTS

FCC Rules	Description of Tests	Results
§2.1046 §22.913(a), §24.232	RF Output Power	Compliant
§2.1047	Modulation Characteristics	N/A ¹
§2.1049 §22.917, §24.238	Occupied Bandwidth / Out of Band Emissions	Compliant
§2.1053 §22.917, §24.238	Spurious Radiated Emissions	Compliant
§2.1051 §22.917, §24.238	Spurious Emissions at Antenna Terminals	Compliant
§22.917, §24.238	Band Edge	Compliant
§2.1055 §22.355, §24.235	Frequency Stability	N/A ²
§2.1091	RF Exposure Information	Compliant

Note: ¹According to FCC §2.1047(d) and part 22H, 24E there is no specific requirement for digital modulation and no oscillator circuit in this device, therefore modulation characteristic is not presented.

² There is no oscillator circuit in the EUT, therefore there is no frequency stability measurement required.

4 FCC §2.1046, §22.913(a) & §24.232 – RF OUTPUT POWER

4.1 Applicable Standard

According to FCC §22.913 (a), the maximum effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts.

According to FCC §24.232 , Mobile/portable stations are limited to 2 watts EIRP peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

4.2 Test Procedure

Conducted:

The RF output of the transmitter was connected to the signal generator and the spectrum analyzer through sufficient attenuation.

4.3 Test Environmental Conditions

Temperature:	20-25 °C
Relative Humidity:	35-40 %
ATM Pressure:	101-102 kPa

The testing was performed by Lionel Lara from 2011-08-15 to 2011-08-19 at RF Site.

4.4 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
Rohde & Schwarz	Generator, Signal	SMIQ03	849192/0085	2010-03-31
Agilent	Analyzer, Spectrum	E4440A	US45303156	2010-08-09
Agilent	ESG-D Series Signal Generator	E4438C	MY45091309	2011-04-28

Statement of Traceability: BAACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

4.5 Test Results

Maximum Output Power – Modulated Signal

Mode		Channel	Frequency (MHz)	Output Power (dBm)	Output Power (mw)	Limit (Watt)
GSM	850 MHz Uplink	Low	824.2	20.52	112.72	500
		Middle	836.6	21.00	125.89	500
		High	848.8	19.55	90.16	500
	850 MHz Downlink	Low	869.2	21.94	156.31	500
		Middle	881.6	23.10	204.17	500
		High	893.8	21.14	130.02	500
	1900 MHz Uplink	Low	1850.2	22.24	167.49	2
		Middle	1880.0	21.39	137.72	2
		High	1909.8	18.36	68.55	2
	1900 MHz Downlink	Low	1930.2	19.55	90.16	2
		Middle	1960.0	23.65	231.74	2
		High	1989.8	19.02	79.80	2

Mode		Channel	Frequency (MHz)	Output Power (dBm)	Output Power (mw)	Limit (Watt)
EDGE	850 MHz Uplink	Low	824.2	18.93	78.16	500
		Middle	836.6	21.26	133.66	500
		High	848.8	20.56	113.76	500
	850 MHz Downlink	Low	869.2	19.84	96.38	500
		Middle	881.6	20.04	100.93	500
		High	893.8	23.22	209.89	500
	1900 MHz Uplink	Low	1850.2	23.13	205.59	2
		Middle	1880.0	23.58	228.03	2
		High	1909.8	18.55	71.61	2
	1900 MHz Downlink	Low	1930.2	17.38	54.70	2
		Middle	1960.0	21.03	126.77	2
		High	1989.8	15.87	38.64	2

Note: For PCS band, the RF cable and connectors loss is over 5 dB, the EIRP output power is less than 33 dBm (2 watts).

Mode		Channel	Frequency (MHz)	Output Power (dBm)	Output Power (mw)	Limit (Watt)
CDMA	850 MHz Uplink	Low	824.80	18.43	69.66	500
		Middle	836.52	20.23	105.44	500
		High	848.20	19.52	89.54	500
	850 MHz Downlink	Low	869.80	18.97	78.89	500
		Middle	881.52	19.37	86.50	500
		High	893.20	21.35	136.46	500
	1900 MHz Uplink	Low	1850.8	19.31	85.31	2
		Middle	1880.0	19.95	98.86	2
		High	1909.2	15.52	35.66	2
	1900 MHz Downlink	Low	1930.8	17.21	52.60	2
		Middle	1960.0	18.83	76.38	2
		High	1989.2	15.37	34.43	2

Mode		Channel	Frequency (MHz)	Output Power (dBm)	Output Power (mw)	Limit (Watt)
WCDMA	850 MHz Uplink	Low	826.4	20.28	106.66	500
		Middle	836.4	21.49	140.93	500
		High	846.6	19.89	97.50	500
	850 MHz Downlink	Low	871.4	22.47	176.60	500
		Middle	881.4	20.76	119.12	500
		High	891.6	22.59	181.55	500
	1900 MHz Uplink	Low	1852.4	19.30	85.11	2
		Middle	1880.0	24.39	274.79	2
		High	1907.6	19.88	97.27	2
	1900 MHz Downlink	Low	1932.4	19.02	79.80	2
		Middle	1960.0	22.24	167.49	2
		High	1987.6	20.32	107.65	2

Note: For PCS band, the RF cable and connectors loss is over 5 dB, the EIRP output power is less than 33 dBm (2 watts).

5 FCC §2.1047 - MODULATION CHARACTERISTIC

5.1 Applicable Standard

According to FCC §2.1047(d), Part 22H and Part 24E, there is no specific requirement for digital modulation and no oscillator circuit, therefore modulation characteristic is not presented.

5.2 Test Result

N/A

6 FCC §2.1049, §22.917 & §24.238 - OCCUPIED BANDWIDTH

6.1 Applicable Standard

Requirements: FCC §2.1049, §22.917 and §24.238.

6.2 Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 30 kHz (Cellular/PCS) and the 26 dB & 99% bandwidth was recorded.

6.3 Test Environmental Conditions

Temperature:	20-25 °C
Relative Humidity:	35-40 %
ATM Pressure:	101-102 kPa

The testing was performed by Lionel Lara from 2011-08-15 to 2011-08-19 at RF Site.

6.4 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
Rohde & Schwarz	Generator, Signal	SMIQ03	849192/0085	2010-03-31
Agilent	Analyzer, Spectrum	E4440A	US45303156	2010-08-09
Agilent	ESG-D Series Signal Generator	E4438C	MY45091309	2011-04-28

Statement of Traceability: *BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.*

6.5 Test Results

Mode		Channel	Frequency (MHz)	Emission Bandwidth 26 dB (kHz)	Emission Bandwidth 99% (kHz)
GSM	850 MHz Uplink	Middle	836.6	318.948	247.3864
	850 MHz Downlink	Middle	881.6	324.966	248.7918
	1900 MHz Uplink	Middle	1880.0	322.850	248.1241
	1900 MHz Downlink	Middle	1960.0	321.004	248.4913

Mode		Channel	Frequency (MHz)	Emission Bandwidth 26 dB (kHz)	Emission Bandwidth 99% (kHz)
EDGE	850 MHz Uplink	Middle	836.6	309.799	255.9695
	850 MHz Downlink	Middle	881.6	306.911	253.0422
	1900 MHz Uplink	Middle	1880.0	315.159	255.3707
	1900 MHz Downlink	Middle	1960.0	316.276	257.2820

Mode		Channel	Frequency (MHz)	Emission Bandwidth 26 dB (MHz)	Emission Bandwidth 99% (MHz)
CDMA	850 MHz Uplink	Middle	836.52	1.442	1.2605
	850 MHz Downlink	Middle	881.52	1.448	1.2707
	1900 MHz Uplink	Middle	1880.0	1.445	1.2685
	1900 MHz Downlink	Middle	1960.0	1.461	1.2733


Mode		Channel	Frequency (MHz)	Emission Bandwidth 26 dB (MHz)	Emission Bandwidth 99% (MHz)
WCDMA	850 MHz Uplink	Middle	836.4	4.977	4.4160
	850 MHz Downlink	Middle	881.4	4.918	4.3340
	1900 MHz Uplink	Middle	1880.0	4.963	4.3767
	1900 MHz Downlink	Middle	1960.0	4.994	4.3856

Please refer to the following plots.


GSM 850 MHz Band (Uplink)

Middle Channel (836.6 MHz)

Input

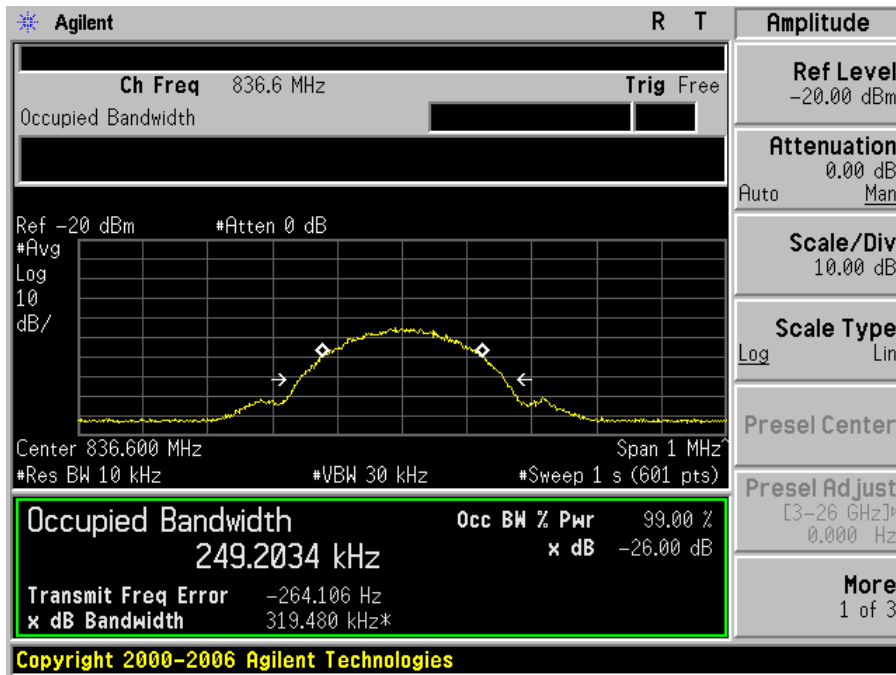


Output

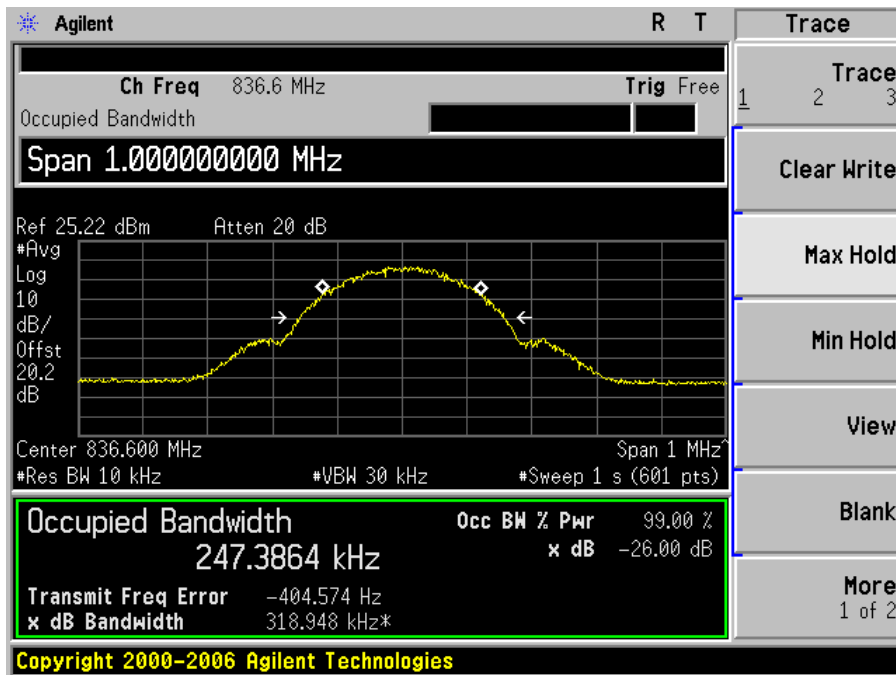


GSM 850 MHz Band (Downlink)

Middle Channel (881.6 MHz)

Input

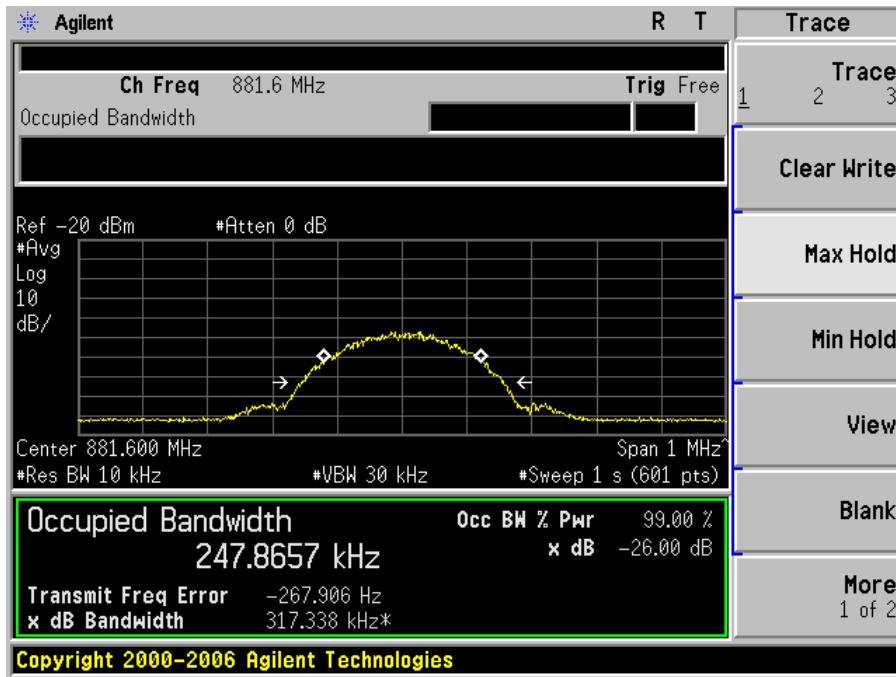


Output

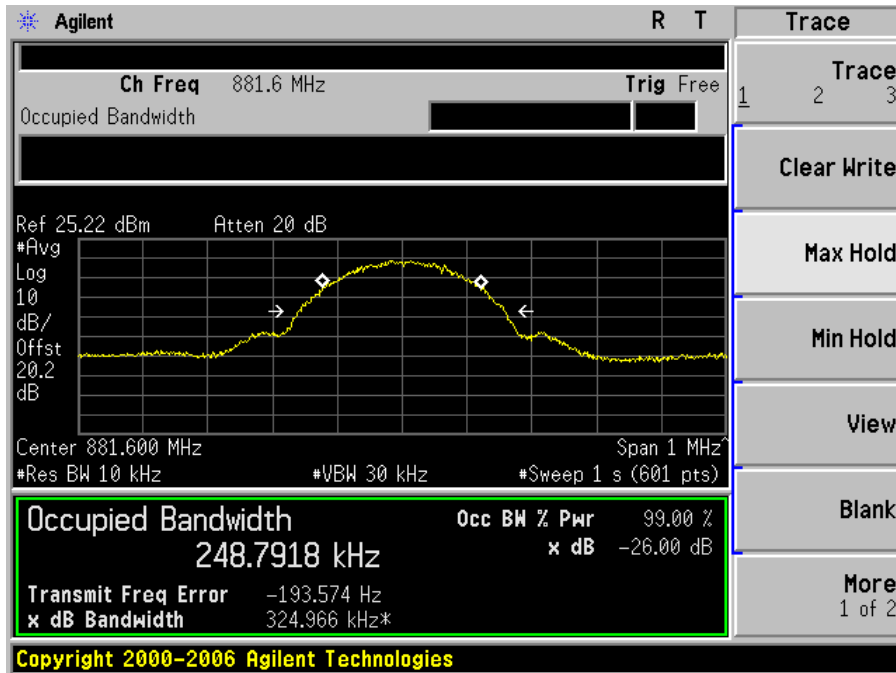


GSM 1900 MHz Band (Uplink)

Middle Channel (1880 MHz)

Input

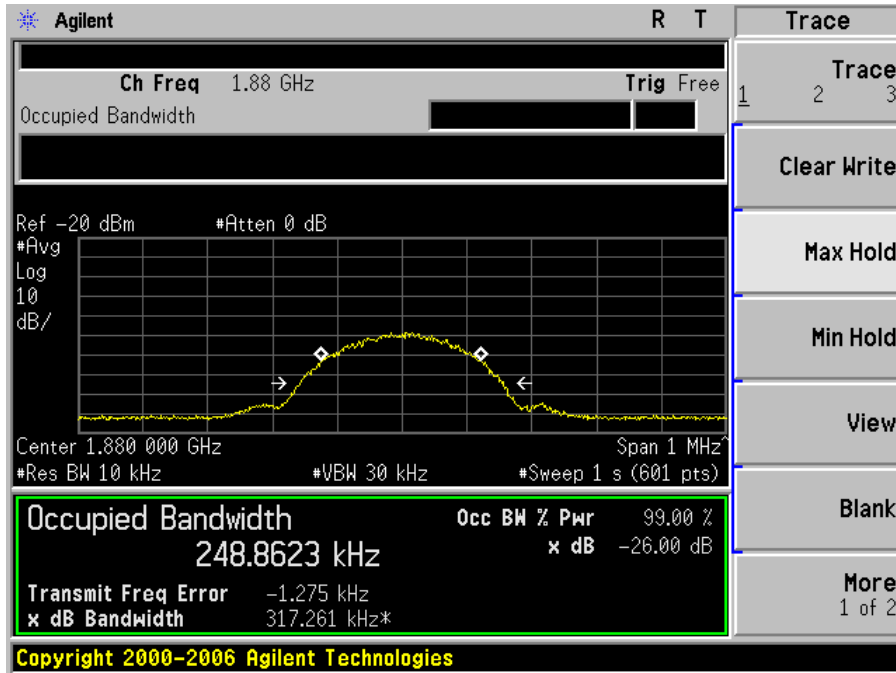


Output

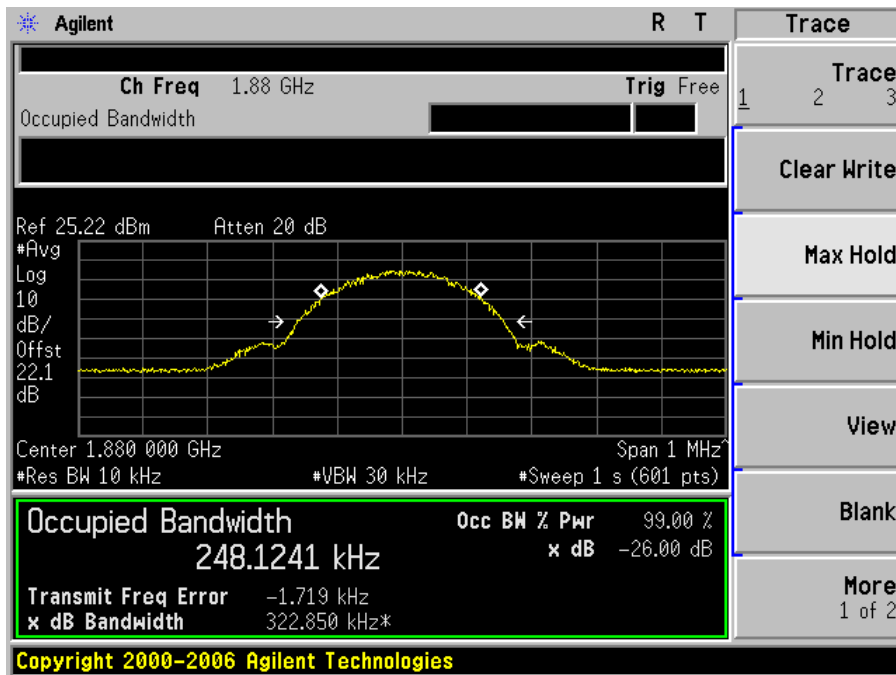


GSM 1900 MHz Band (Downlink)

Middle Channel (1960 MHz)

Input

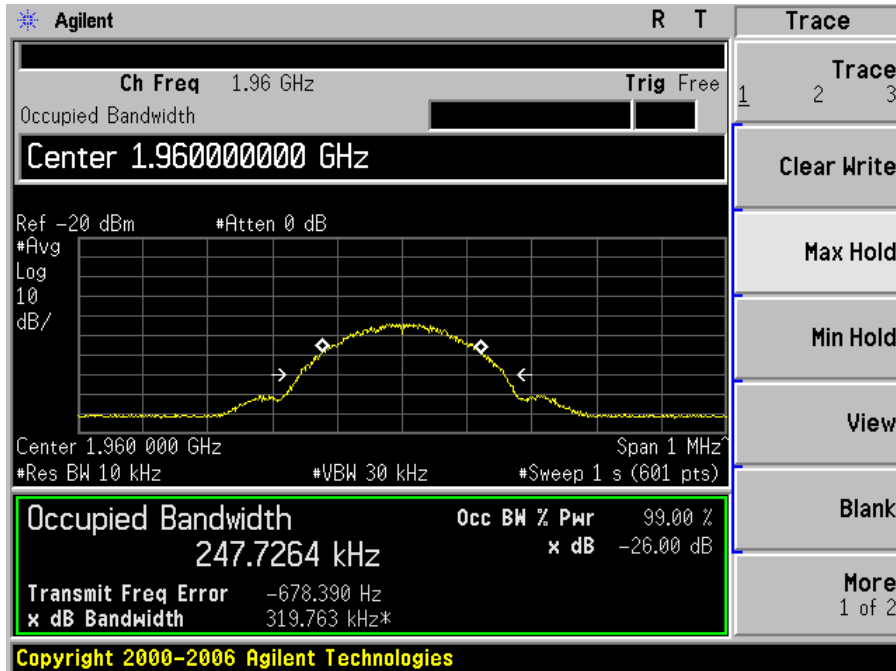


Output

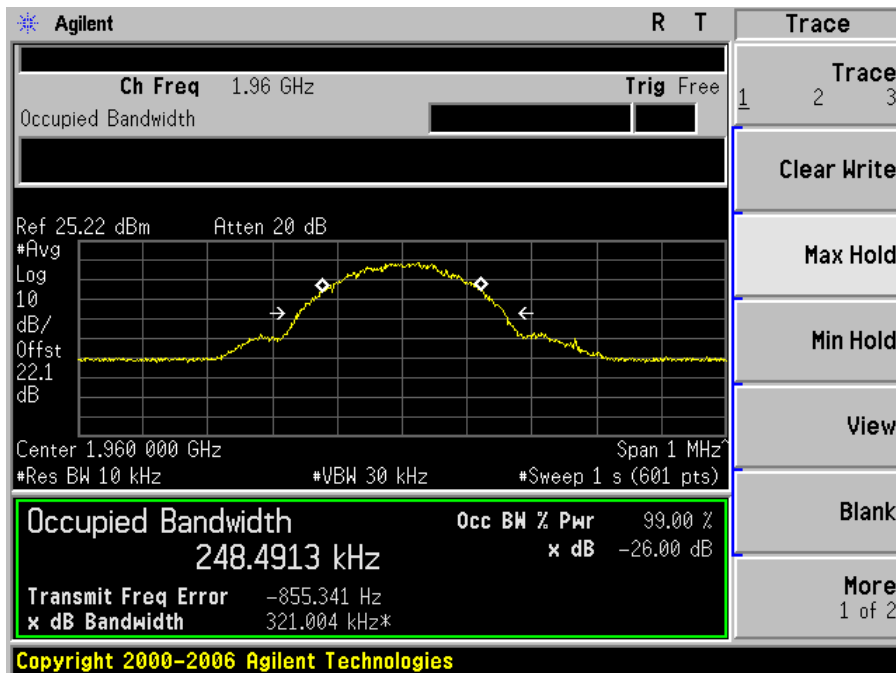


EDGE 850 MHz Band (Uplink)

Middle Channel (836.6 MHz)

Input

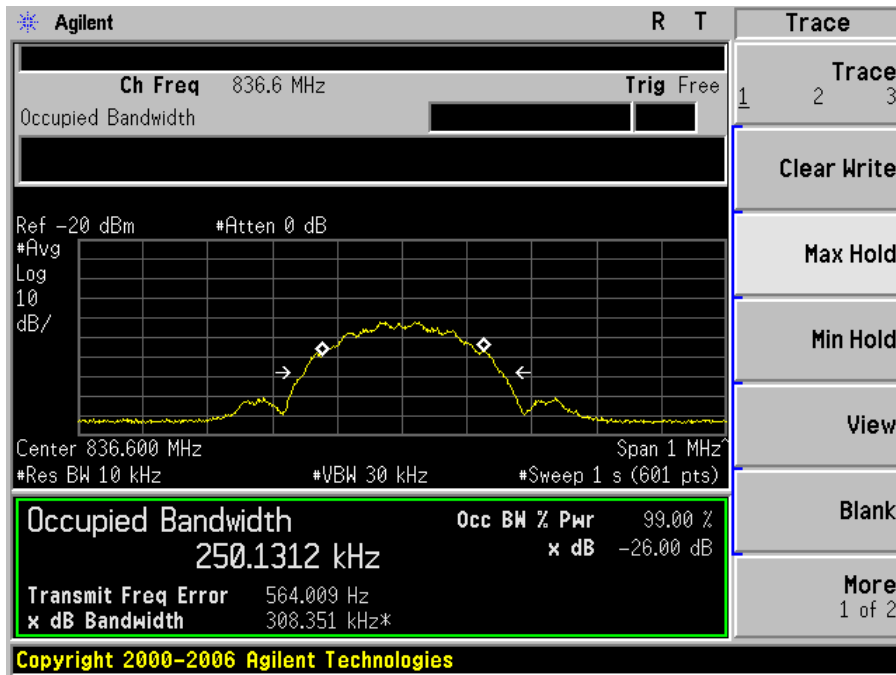


Output

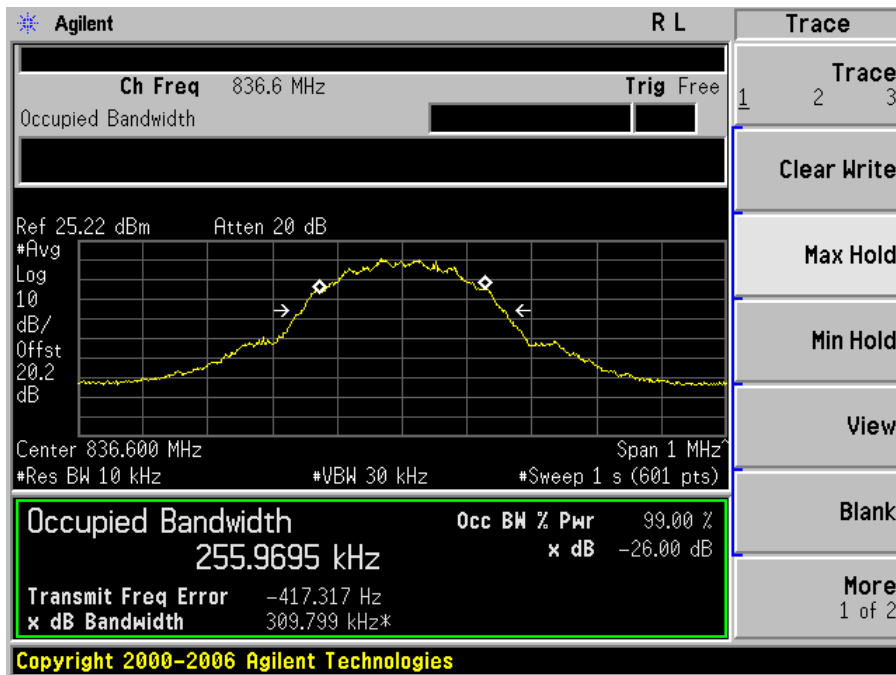


EDGE 850 MHz Band (Downlink)

Middle Channel (881.6 MHz)

Input

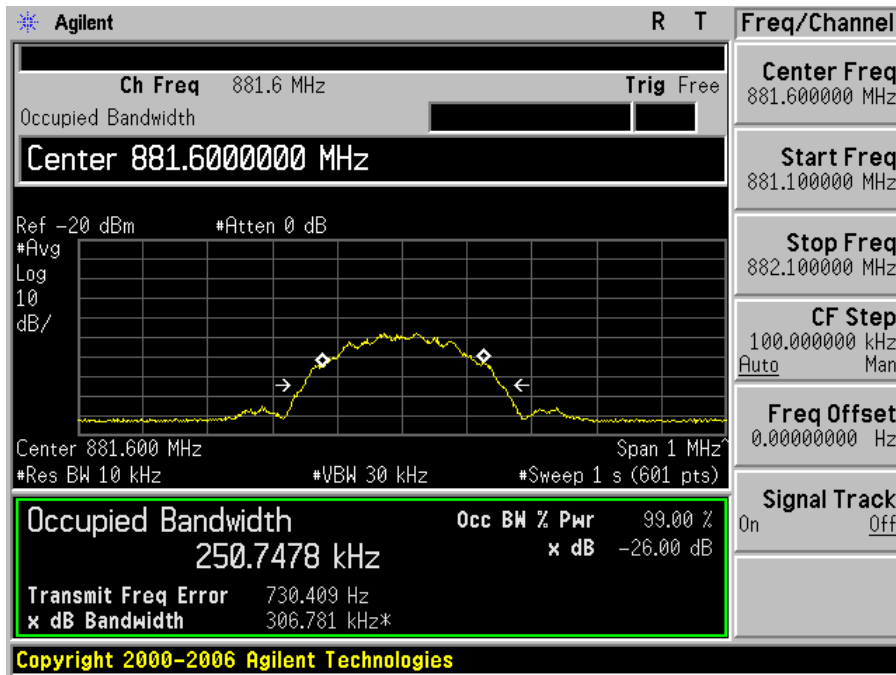


Output

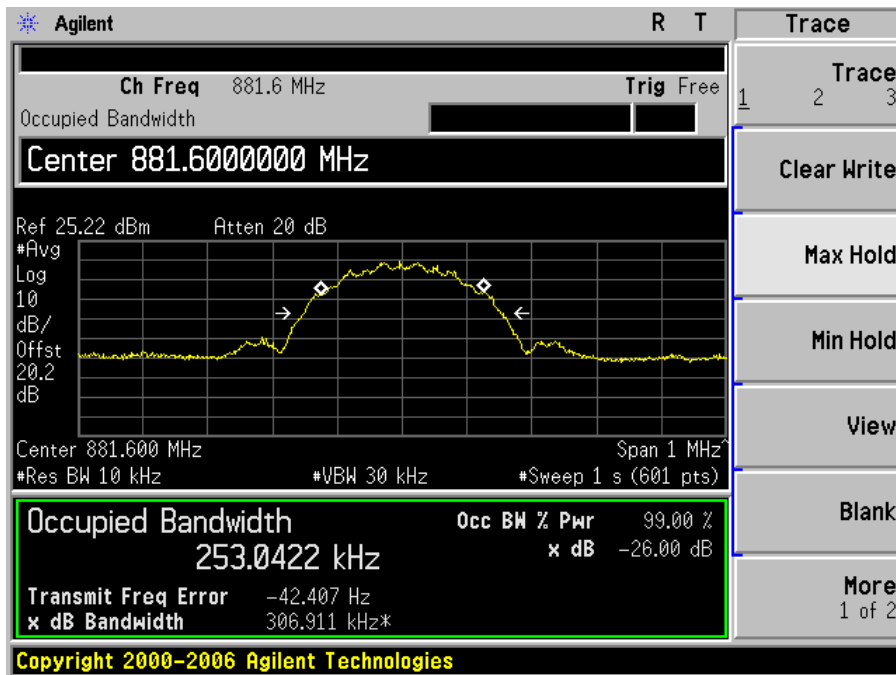


EDGE 1900 MHz Band (Uplink)

Middle Channel (1880 MHz)

Input

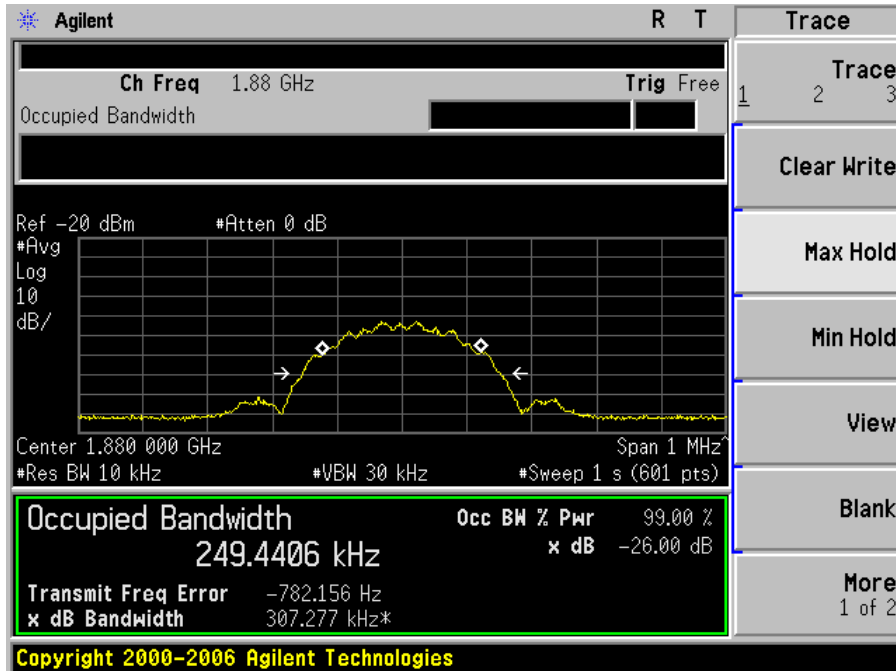


Output

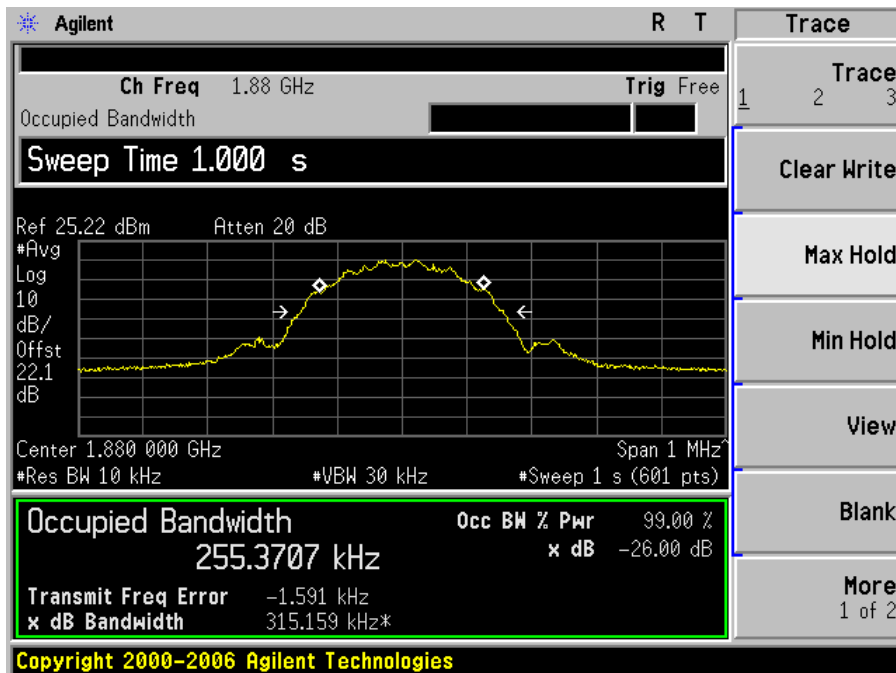


EDGE 1900 MHz Band (Downlink)

Middle Channel (1960 MHz)

Input

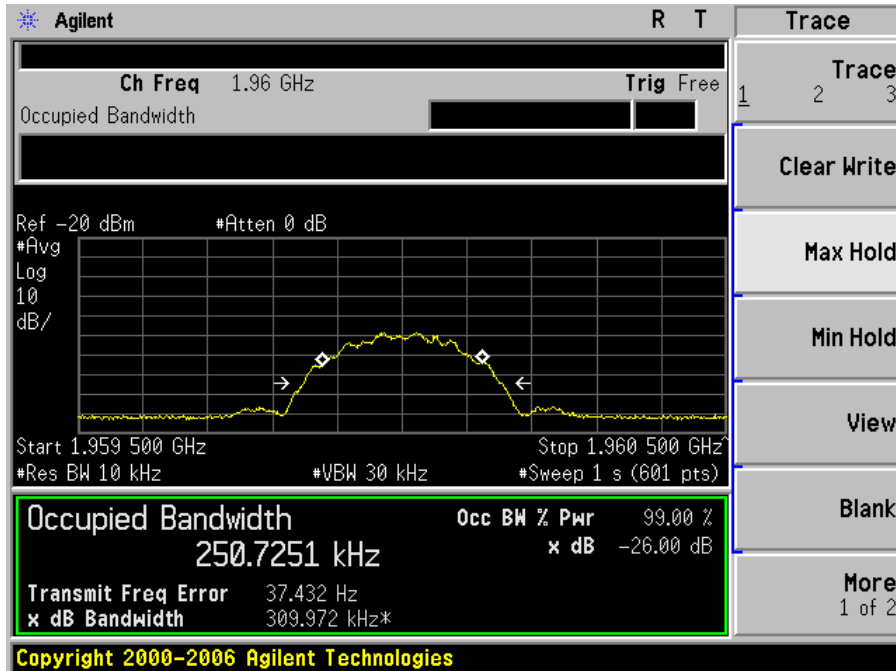


Output

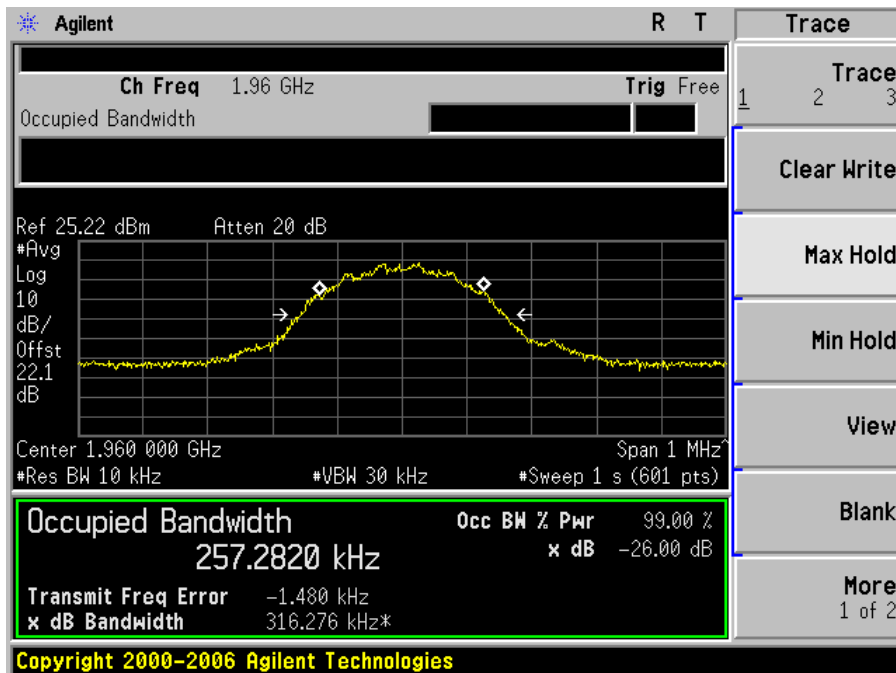


CDMA 850 MHz Band (Uplink)

Middle Channel (836.52 MHz)

Input

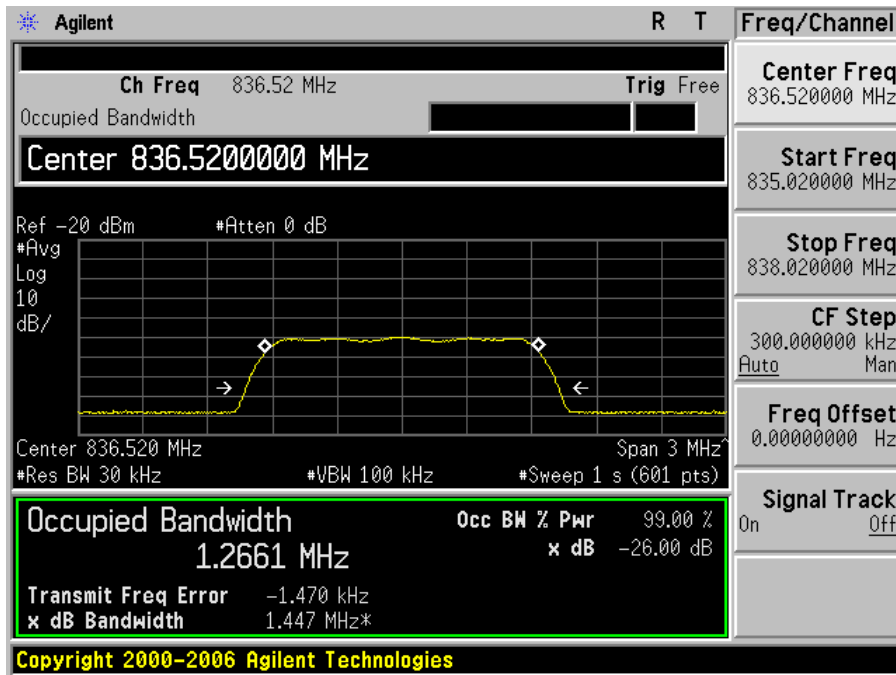


Output

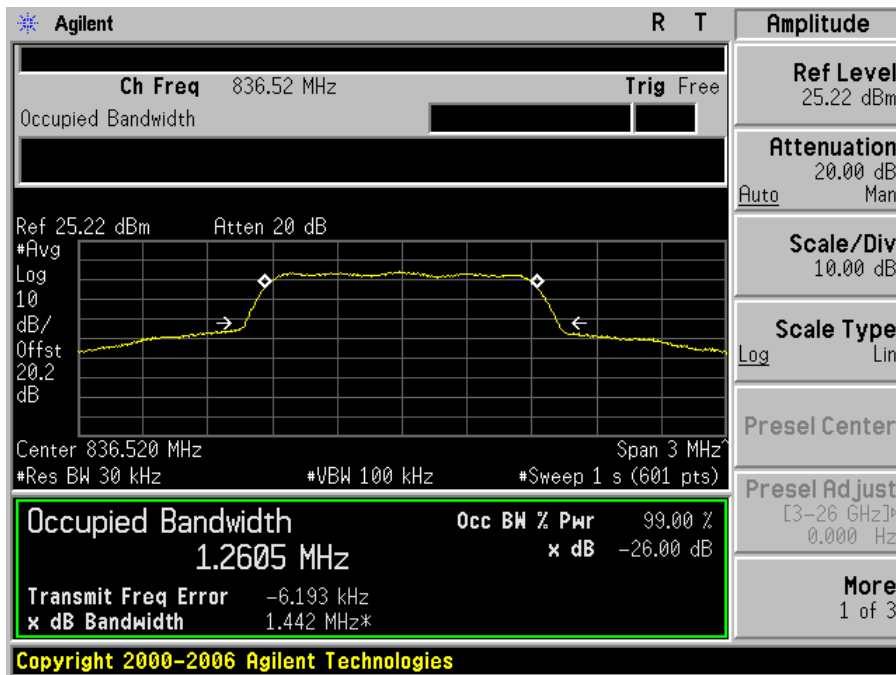


CDMA 850 MHz band (Downlink)

Middle Channel (881.52 MHz)

Input

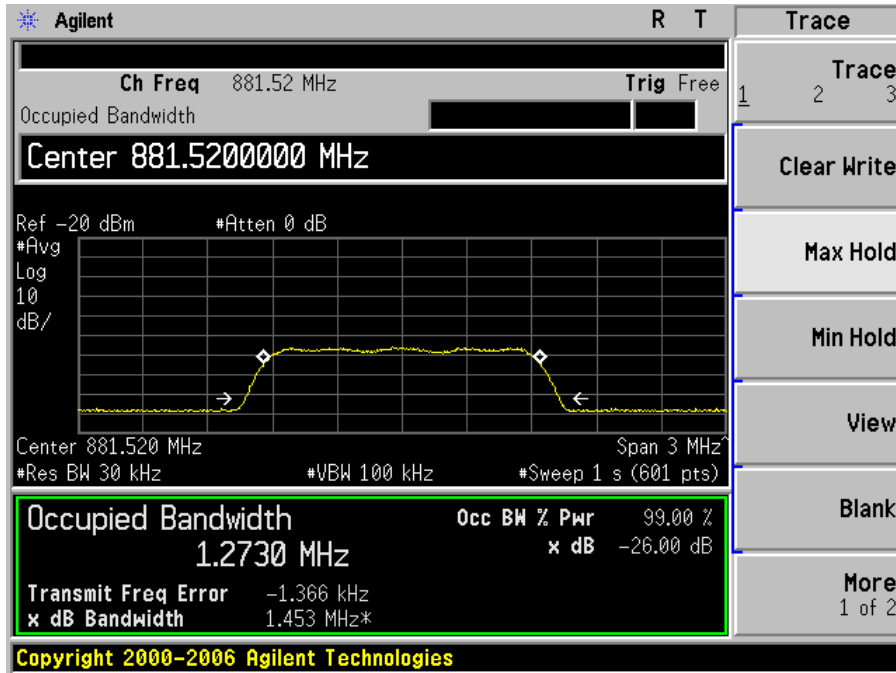


Output

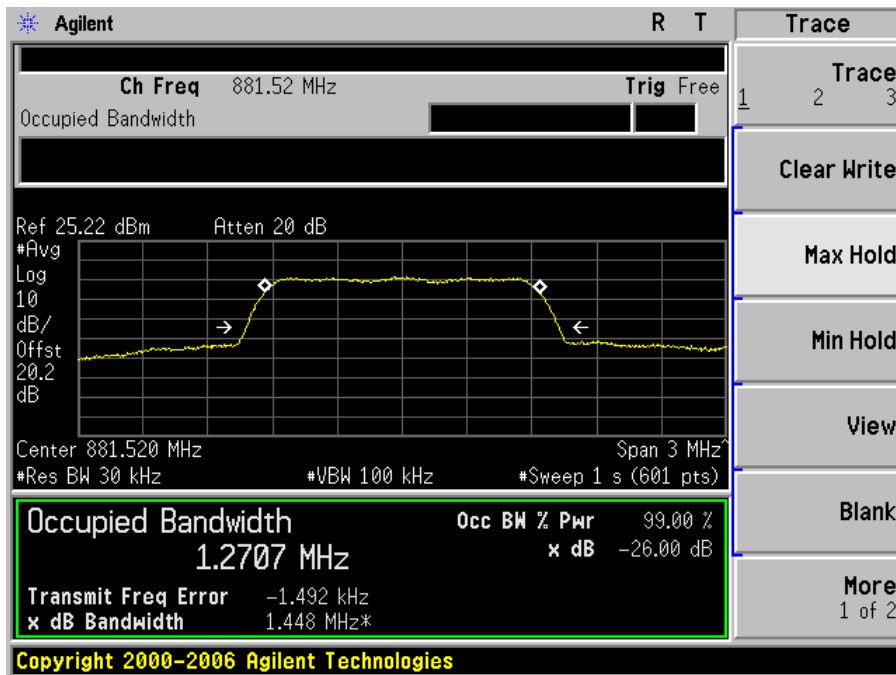


CDMA 1900 MHz Band (Uplink)

Middle Channel (1880 MHz)

Input

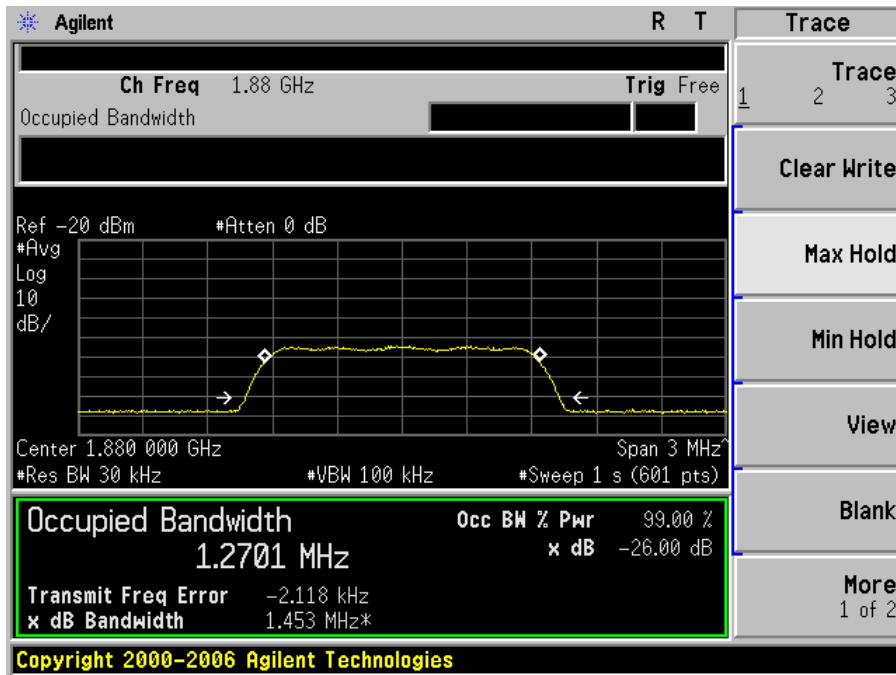


Output

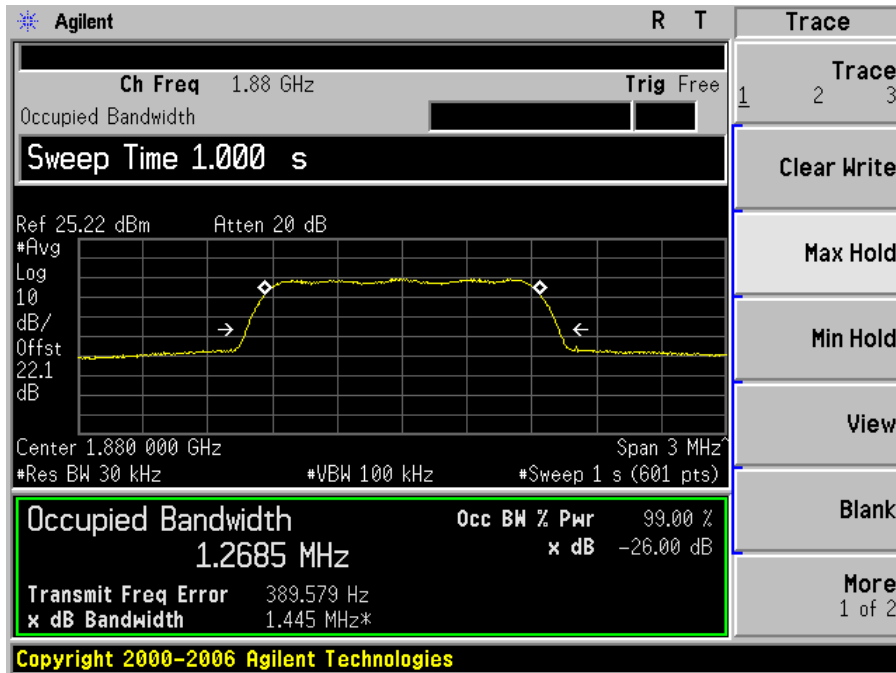


CDMA 1900 MHz Band (Downlink)

Middle Channel (1960 MHz)

Input

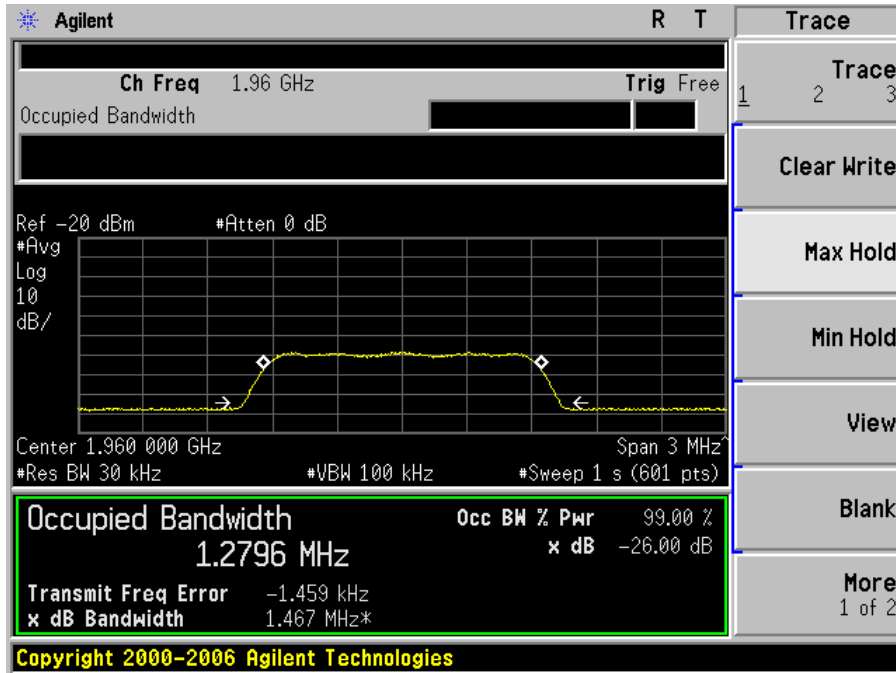


Output

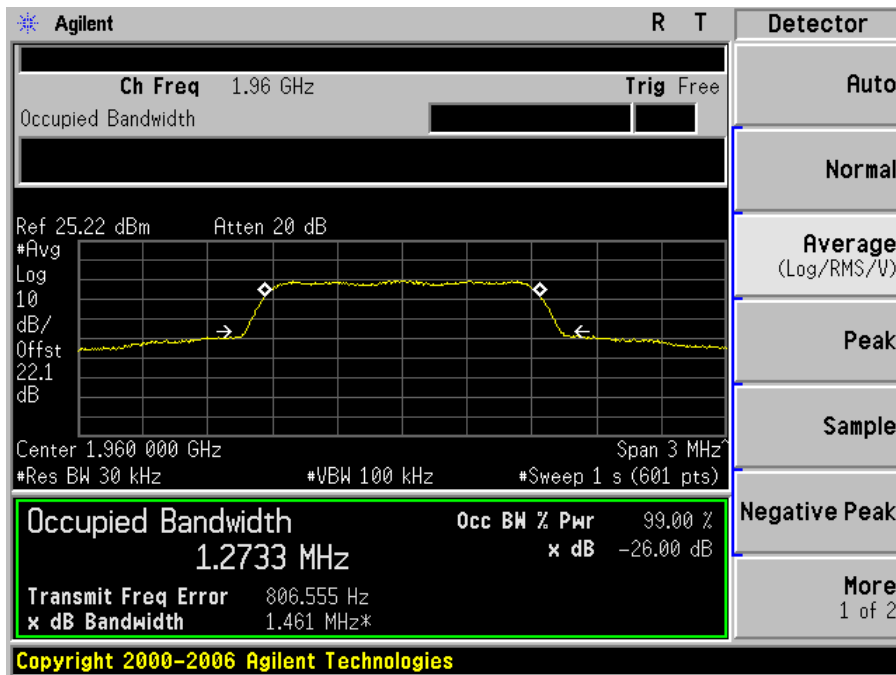


WCDMA 850 MHz Band (Uplink)

Middle Channel (836.4 MHz)

Input

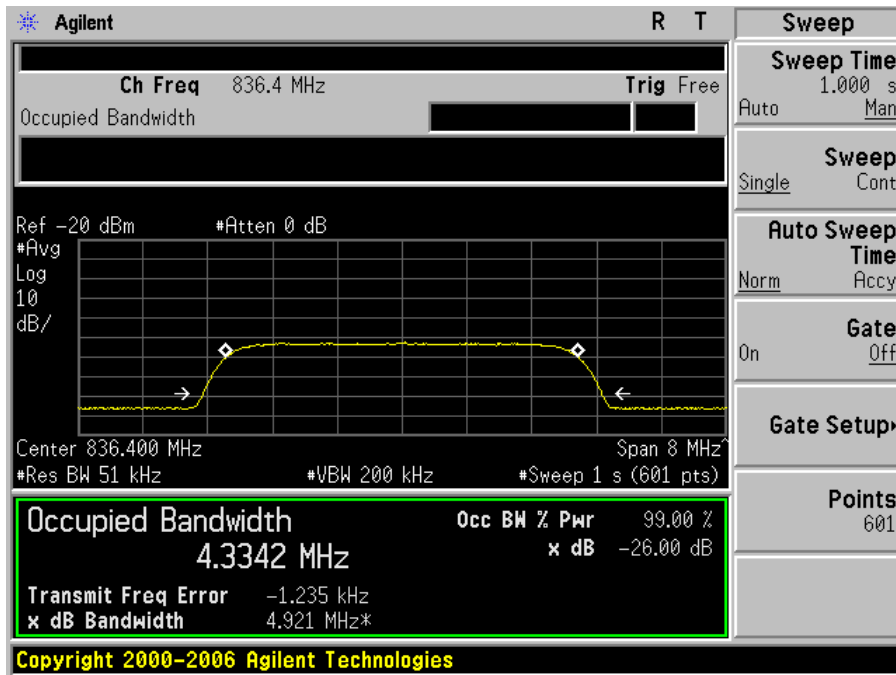


Output

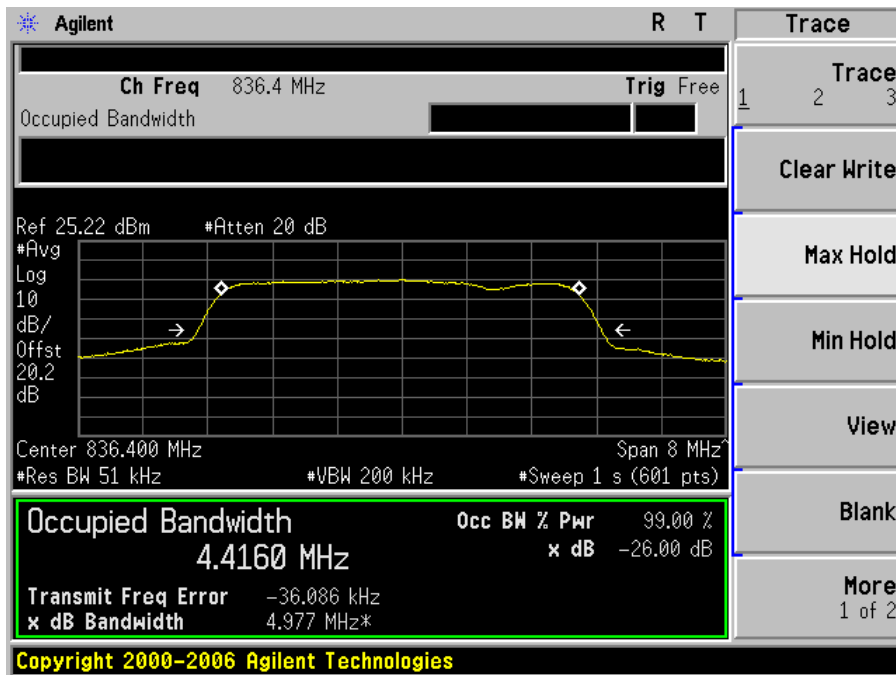


WCDMA 850 MHz band (Downlink)

Middle Channel (881.4 MHz)

Input

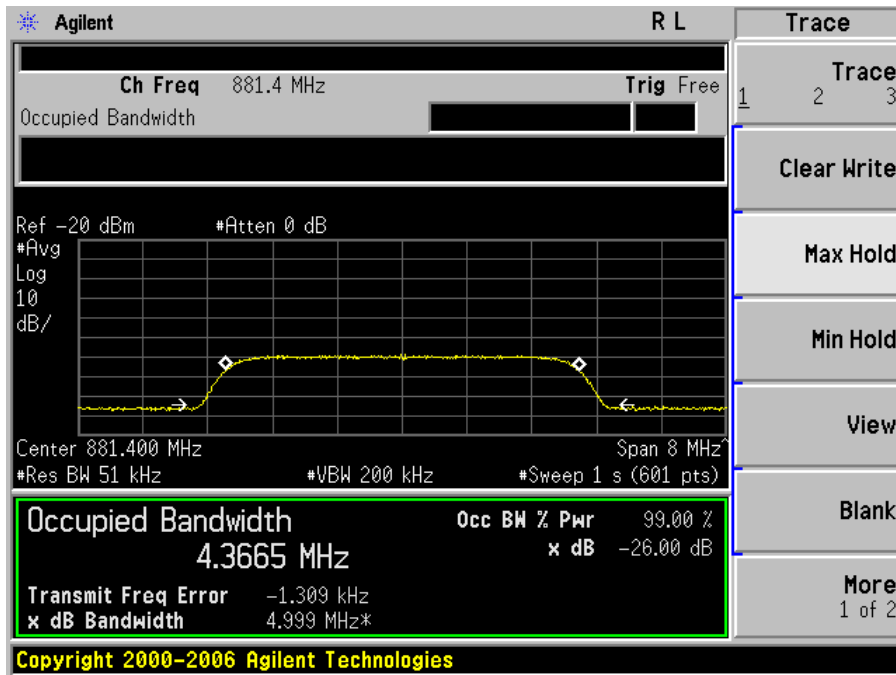


Output

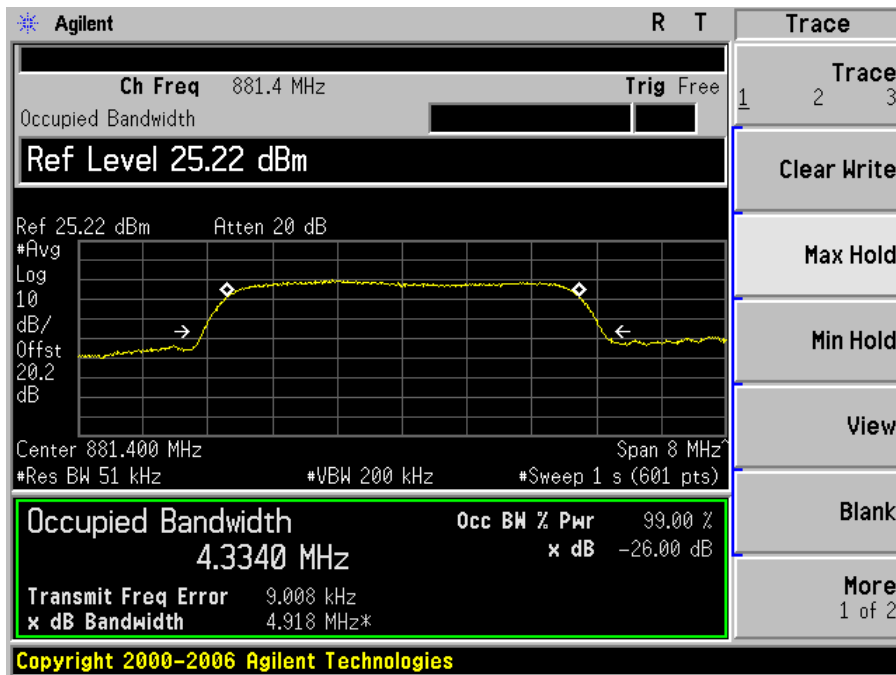


WCDMA 1900 MHz Band (Uplink)

Middle Channel (1880 MHz)

Input

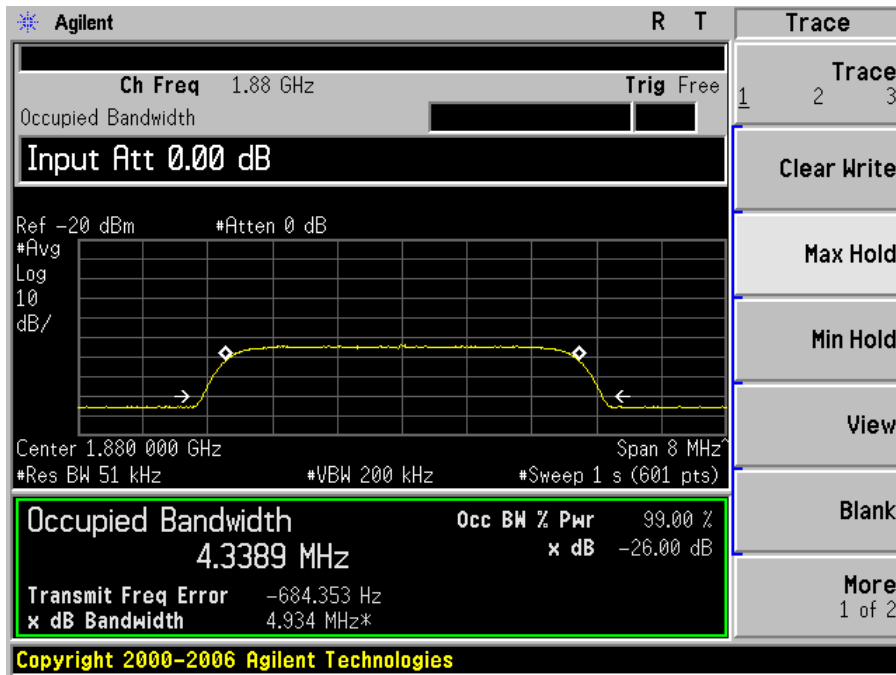


Output

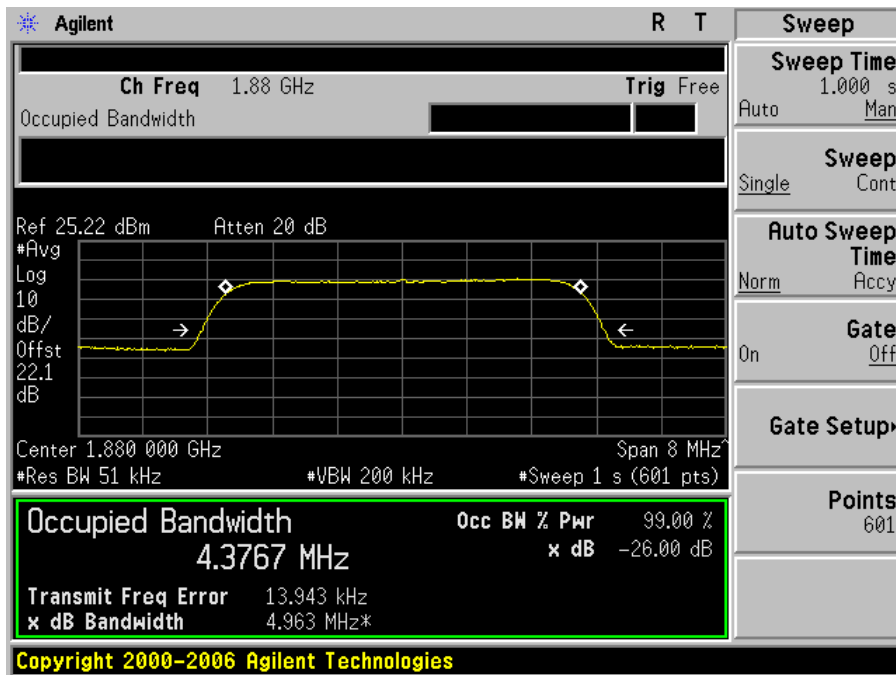


WCDMA 1900 MHz Band (Downlink)

Middle Channel (1960 MHz)

Input

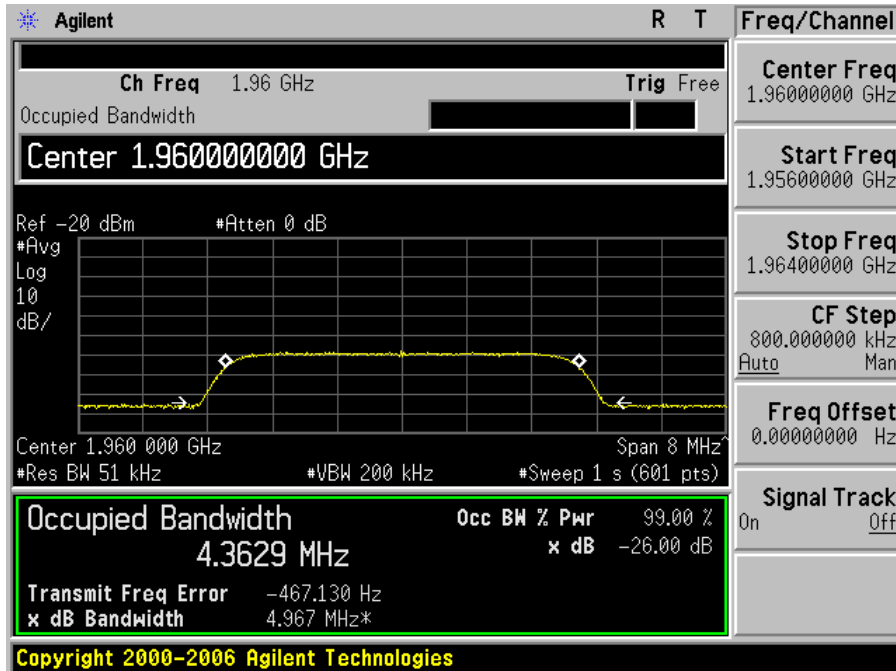

Output

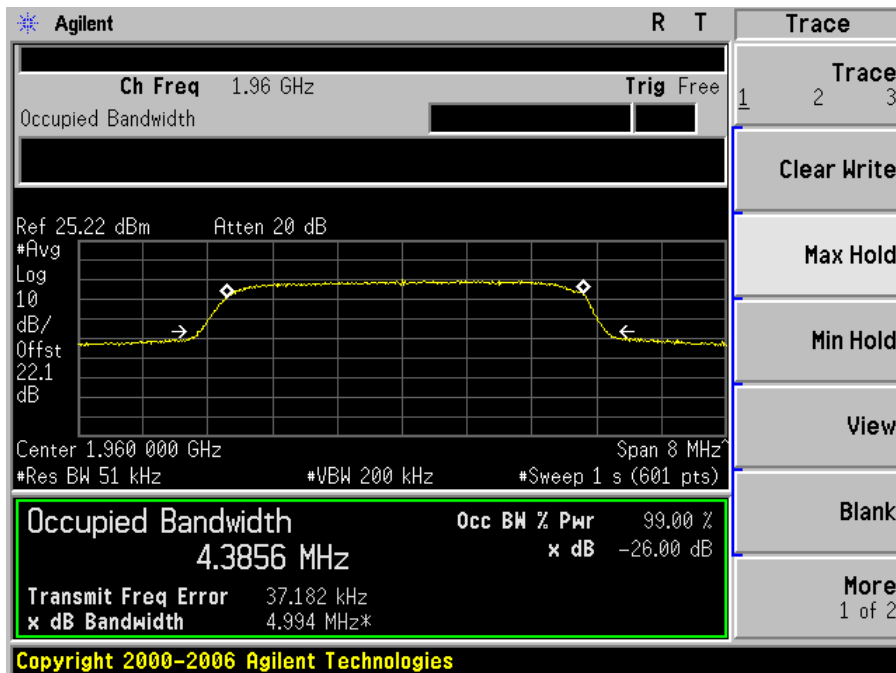

7 FCC §2.1053, §22.917 & §24.238 - SPURIOUS RADIATED EMISSIONS

7.1 Applicable Standard

Requirements: FCC §2.1053, §22.917 and §24.238

7.2 Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \log (\text{TX Power in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \text{ Log}_{10} (\text{power out in Watts})$

7.3 Test Environmental Conditions

Temperature:	20-25 °C
Relative Humidity:	35-40 %
ATM Pressure:	101-102 kPa

The testing was performed by Lionel Lara from 2011-08-15 to 2011-08-19 at Chamber3.

7.4 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
Hewlett Packard	Pre-amplifier	8447D	2944A06639	2011-06-09
Mini-Circuits	Pre-amplifier	ZVA-183-S	570400946	2011-05-09
Sunol Sciences	Antenna	JB1	A020106-1	2011-05-17
A.R.A Inc	Horn antenna	DRG-118/A	1132	2010-11-29
Sunol Sciences	Horn Antenna	DRH-118	A052704	2011-02-23
Rohde & Schwarz	Generator, Signal	SMIQ03	849192/0085	2010-03-31
Agilent	ESG-D Series Signal Generator	E4438C	MY45091309	2011-04-28
Agilent	Analyzer, Spectrum	E4440A	US45303156	2010-08-09

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

7.5 Summary of Test Results

Worst case reading as follows:

Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Input Frequency (MHz)
Cellular Band, Downlink			
-21.8	1889.67	Vertical	848.8
Cellular Band, Uplink			
-22.08	1889.17	Horizontal	824.2
PCS Band, Downlink			
-21.65	1889.67	Vertical	1989.8
PCS Band, Uplink			
-32.71	304.45	Horizontal	1909.8

7.6 Test Results

Cellular Band, Downlink, Input frequency = 848.8 MHz

Indicated		Turntable Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Cord. (dB)	Cable Loss (dB)	Absolute Level (dBm)		
301.07	61.49	184	150	H	301.07	-44.56	0	0.5	-45.06	-13	-32.06
301.07	48.68	290	113	V	301.07	-57.37	0	0.5	-57.87	-13	-44.87
1889.67	61.46	155	150	V	1889.67	-42.44	8.3	0.66	-34.80	-13	-21.80
1889.67	60.69	130	149	H	1889.67	-43.21	8.3	0.66	-35.57	-13	-22.57

Cellular Band, Uplink, Input frequency = 824.2 MHz

Indicated		Turntable Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Cord. (dB)	Cable Loss (dB)	Absolute Level (dBm)		
299.18	59.06	20	100	H	299.18	-47.35	0	0.5	-47.85	-13	-34.85
299.18	55.92	85	150	V	299.18	-50.49	0	0.5	-50.99	-13	-37.99
1889.17	60.74	269	160	H	1889.17	-42.72	8.3	0.66	-35.08	-13	-22.08
1889.17	59.97	29	150	V	1889.17	-43.49	8.3	0.66	-35.85	-13	-22.85

PCS Band, Downlink, Input frequency = 1989.8 MHz

Indicated		Turntable Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Cord. (dB)	Cable Loss (dB)	Absolute Level (dBm)		
301.53	61.04	180	150	H	301.53	-45.09	0	0.5	-45.59	-13	-32.59
301.53	52.72	298	100	V	301.53	-53.41	0	0.5	-53.91	-13	-40.91
1889.67	61.61	150	151	V	1889.67	-42.29	8.3	0.66	-34.65	-13	-21.65
1889.67	59.02	130	150	H	1889.67	-44.88	8.3	0.66	-37.24	-13	-24.24

PCS Band, Uplink, Input frequency = 1909.8 MHz

Indicated		Turntable Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Cord. (dB)	Cable Loss (dB)	Absolute Level (dBm)		
304.45	61.38	36	150	H	304.45	-45.21	0	0.5	-45.71	-13	-32.71
304.45	56.99	289	150	V	304.45	-49.6	0	0.5	-50.1	-13	-37.1

8 FCC §2.1051, §22.917 & §24.238 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

8.1 Applicable Standard

Requirements: FCC §2.1051, §22.917 and §24.238.

The spectrum shall be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1057.

8.2 Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

8.3 Test Environmental Conditions

Temperature:	20-25 °C
Relative Humidity:	35-40 %
ATM Pressure:	101-102 kPa

The testing was performed by Lionel Lara on 2011-09-14 in RF site.

8.4 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
Rohde & Schwarz	Generator, Signal	SMIQ03	849192/0085	2010-03-31
Agilent	Analyzer, Spectrum	E4440A	US45303156	2010-08-09
Agilent	ESG-D Series Signal Generator	E4438C	MY45091309	2011-04-28

Statement of Traceability: *BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.*


8.5 Test Results

Please refer to the following plots.


Inter-modulation:

GSM/EDGE 850 MHz band Low channel Uplink:

Input

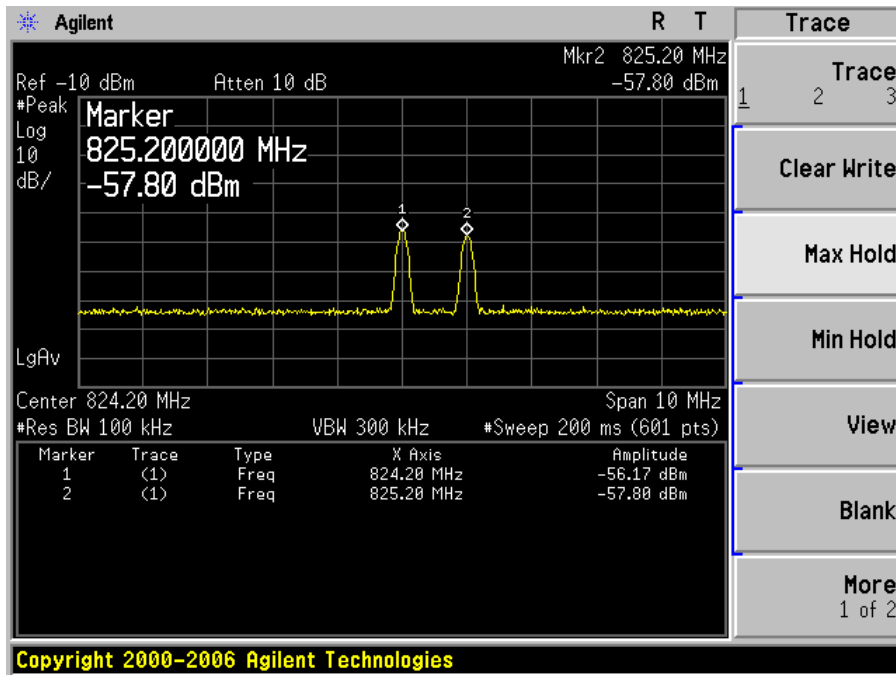


Output

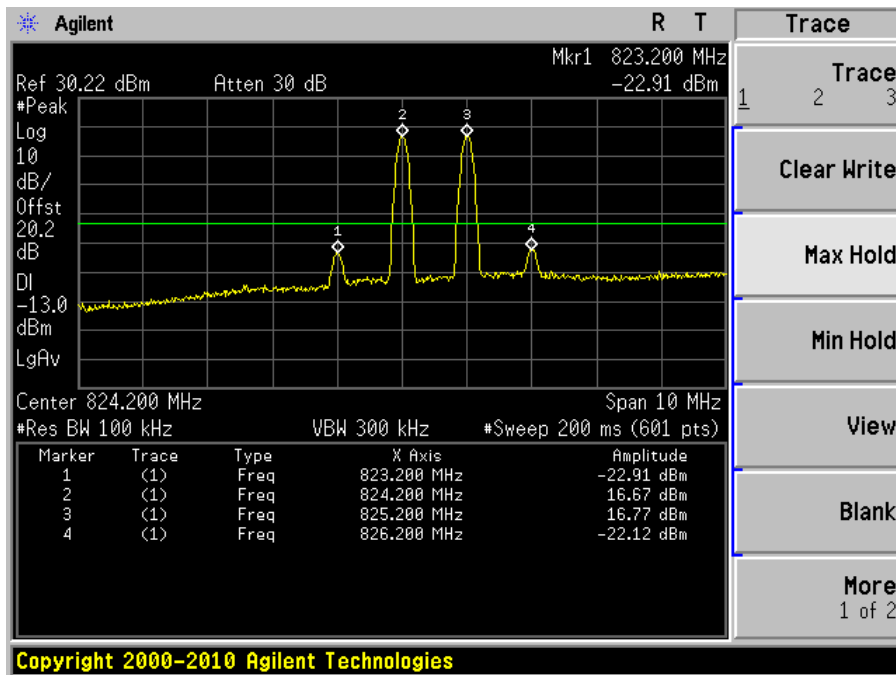


GSM/EDGE 850 MHz band Middle channel Uplink:

Input

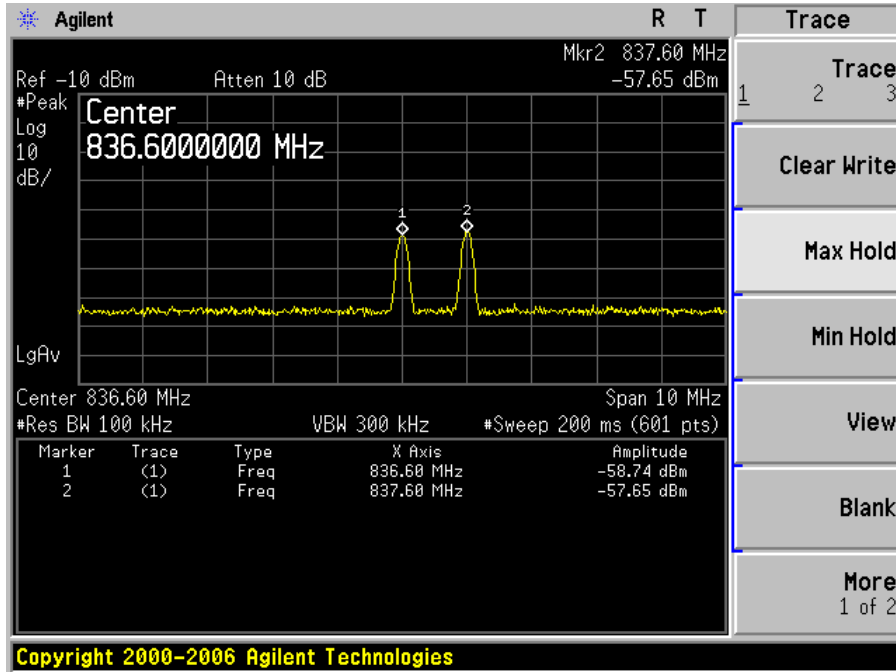


Output

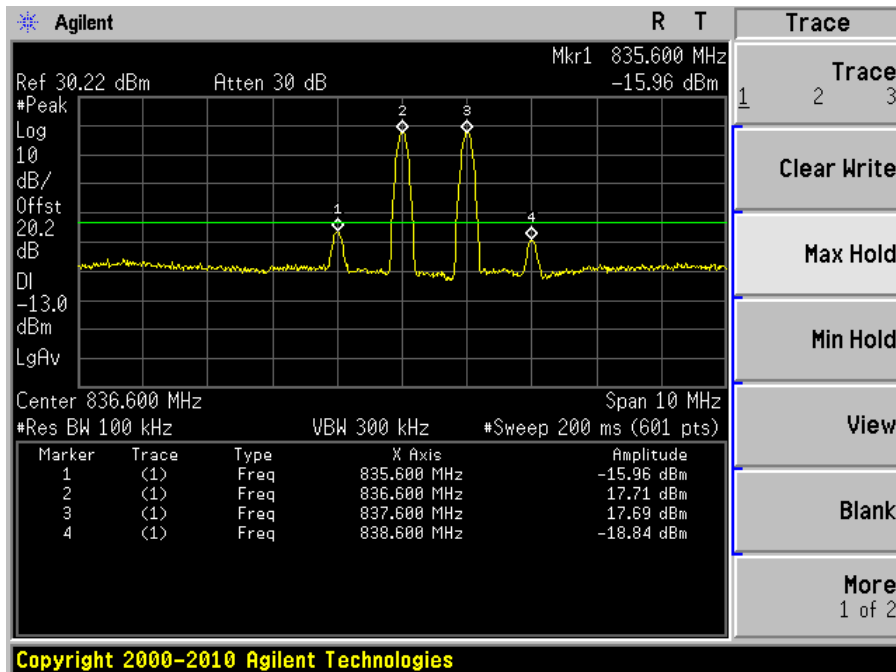


GSM/EDGE 850 MHz band High channel Uplink:

Input

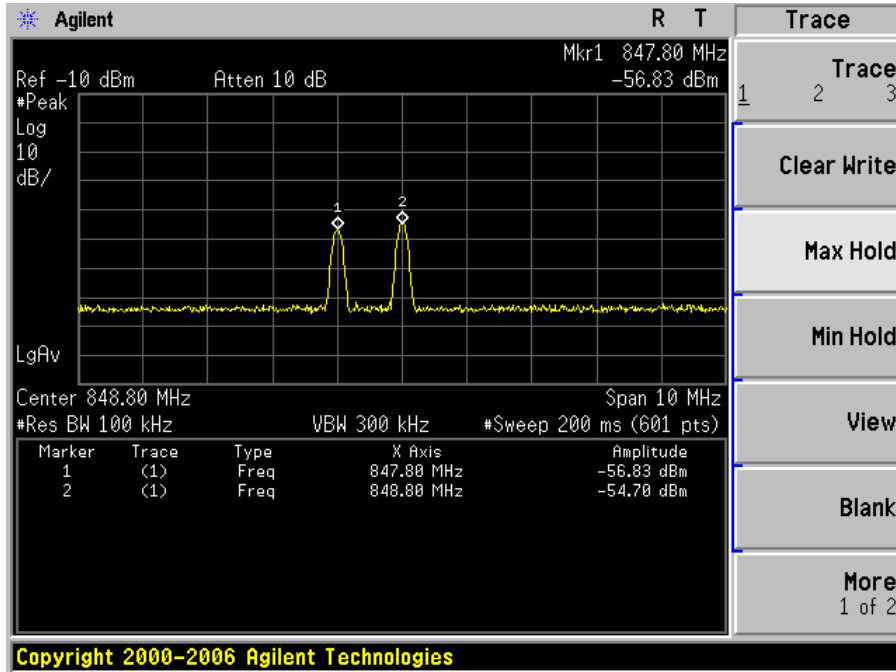


Output

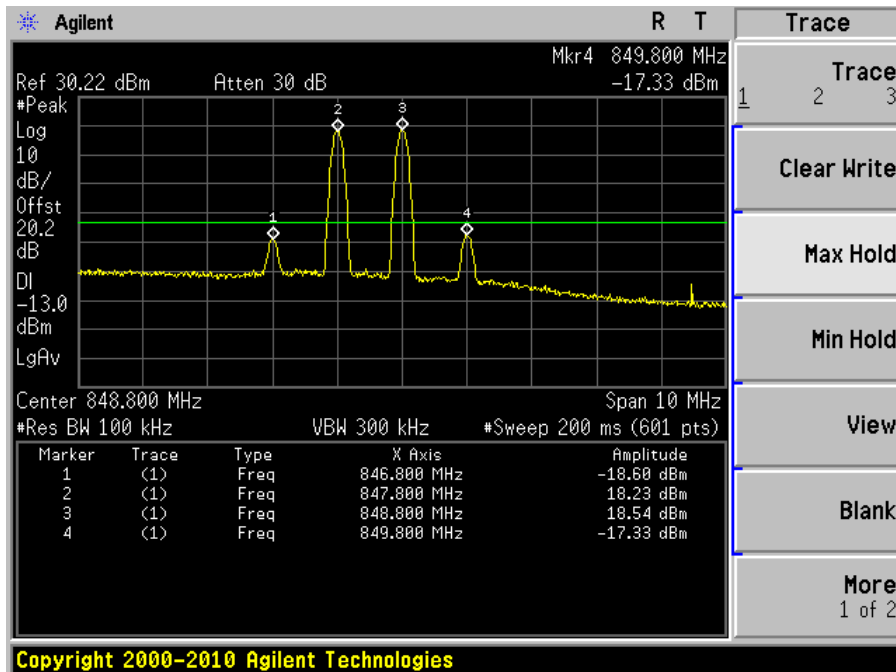


GSM/EDGE 1900 MHz band Low channel Uplink:

Input

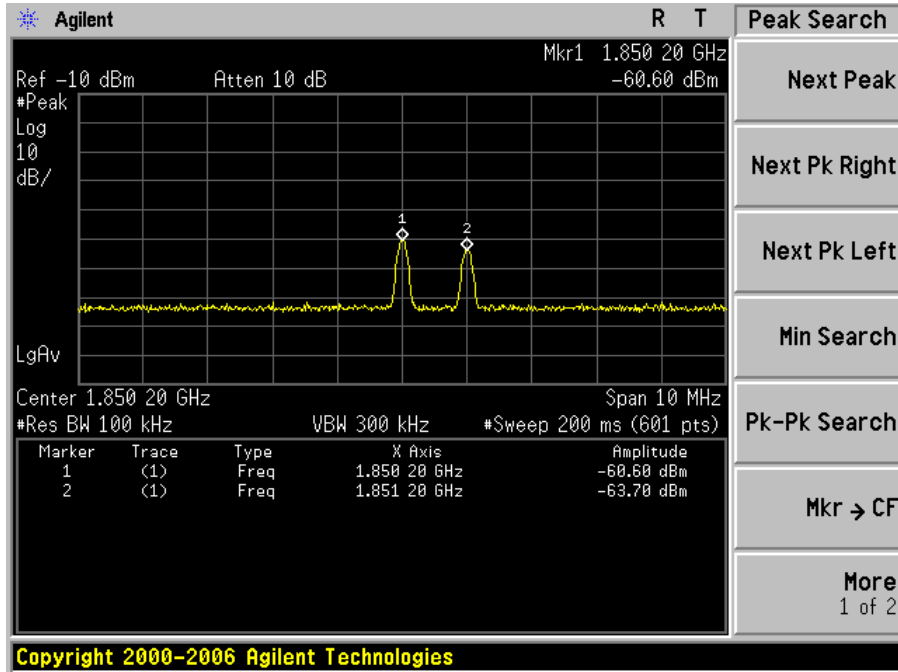


Output

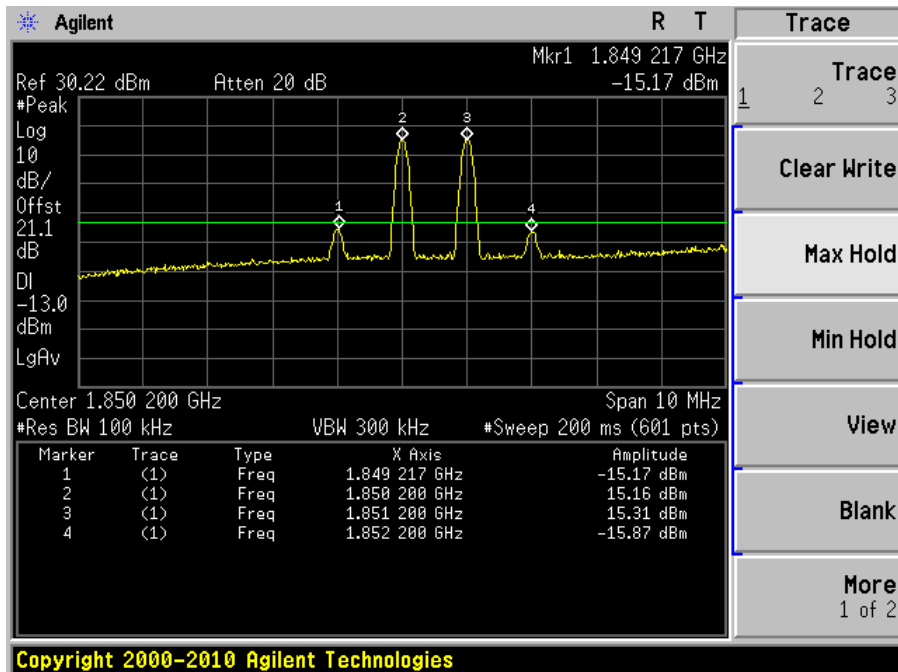


GSM/EDGE 1900 MHz band Middle channel Uplink:

Input

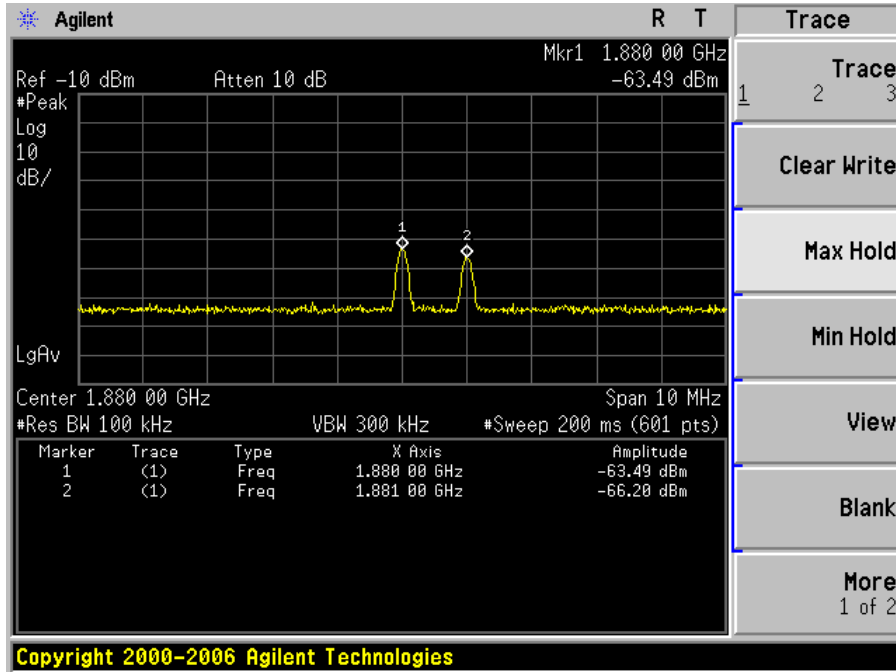


Output

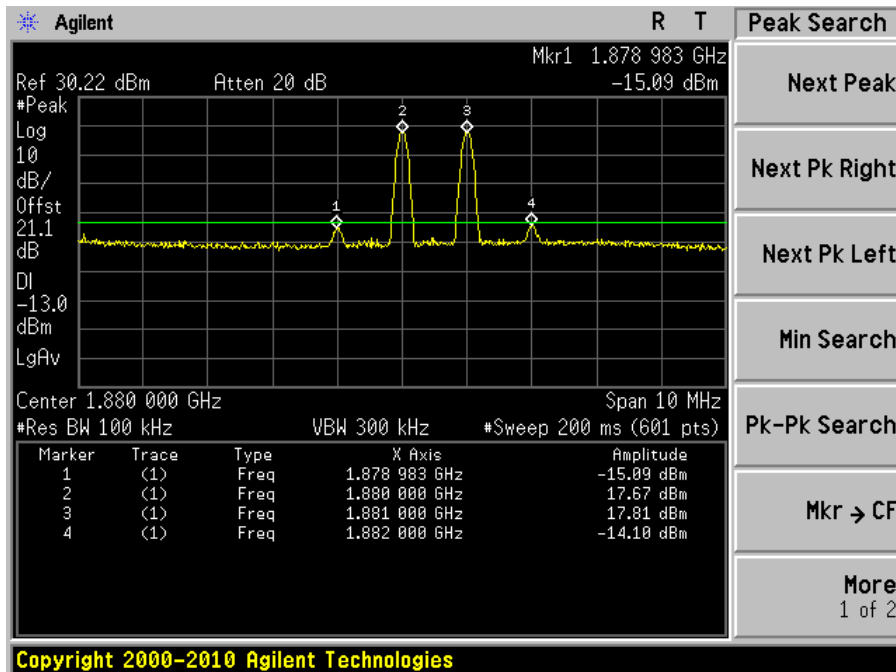


GSM/EDGE 1900 MHz band High channel Uplink:

Input

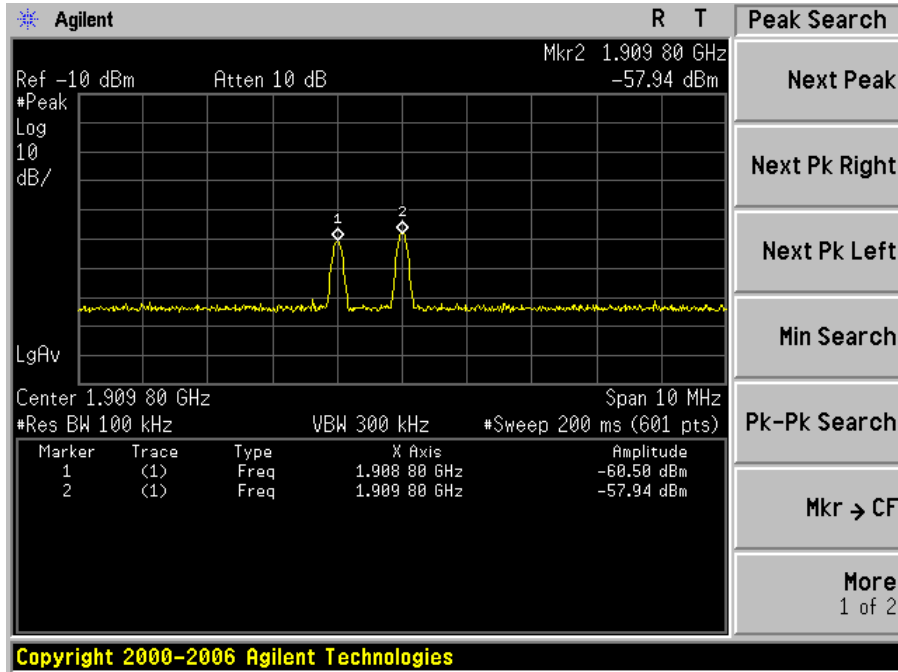


Output

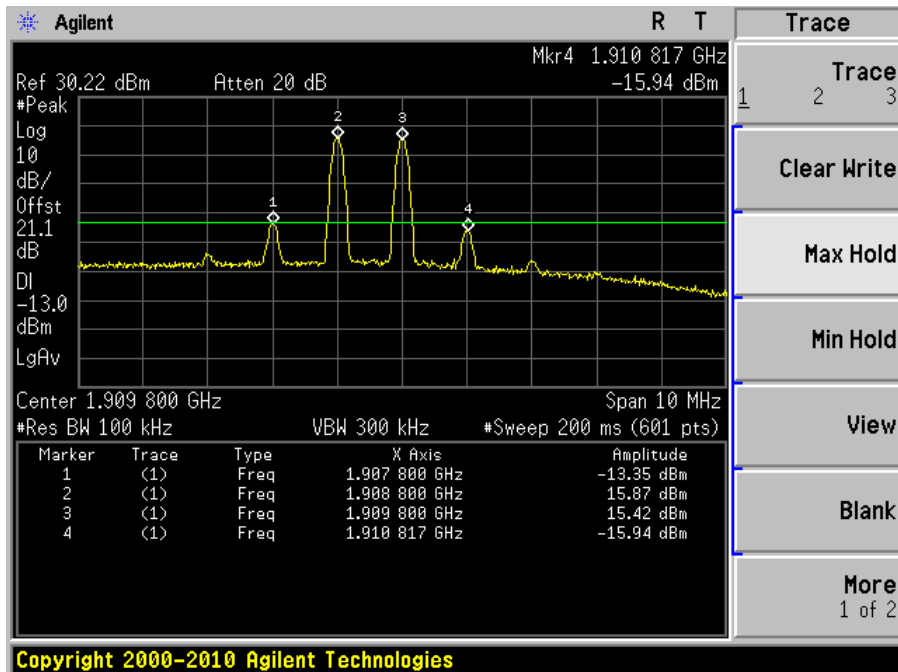


GSM/EDGE 850 MHz band Low channel Downlink:

Input

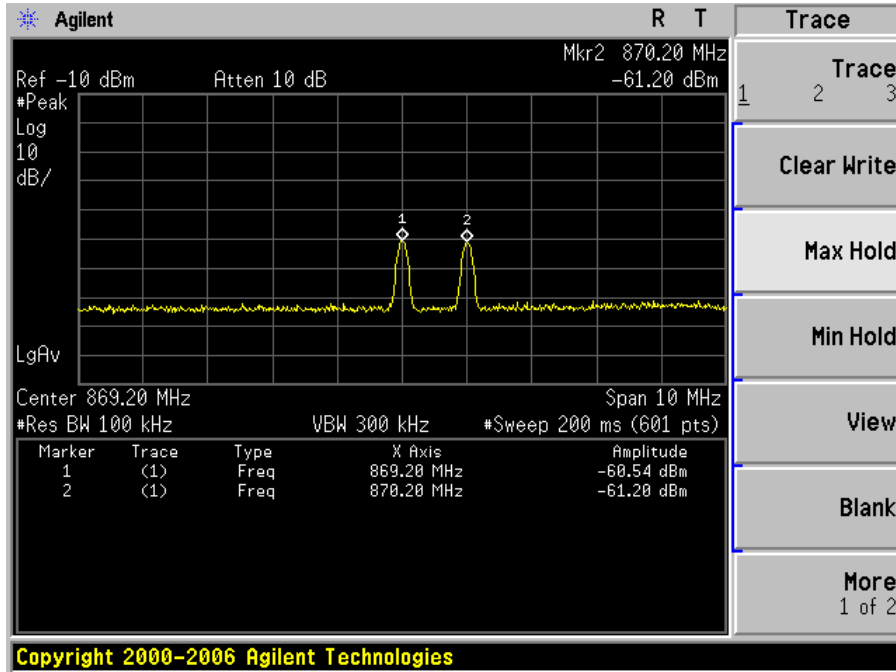


Output

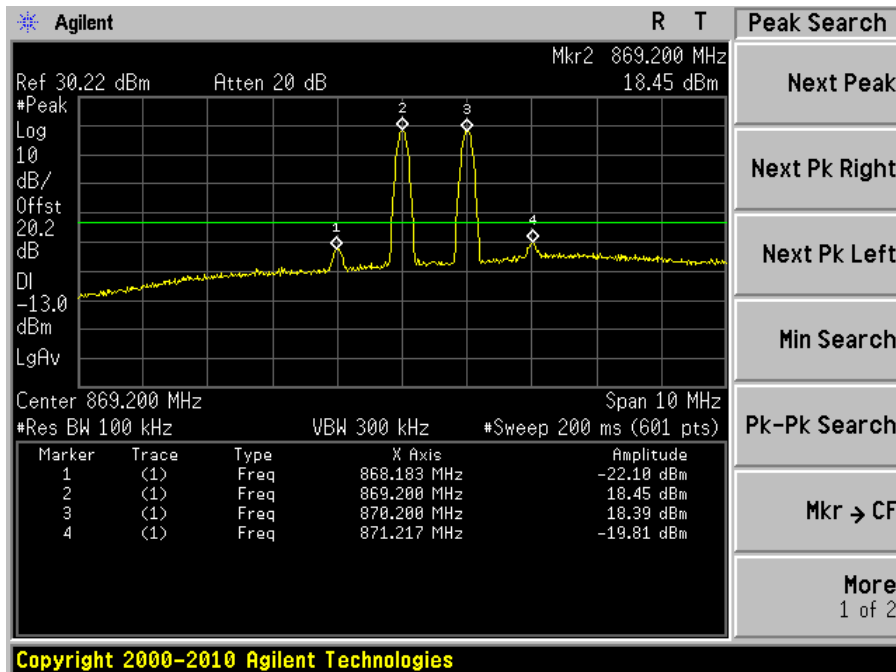


GSM/EDGE 850 MHz band Middle channel Downlink:

Input

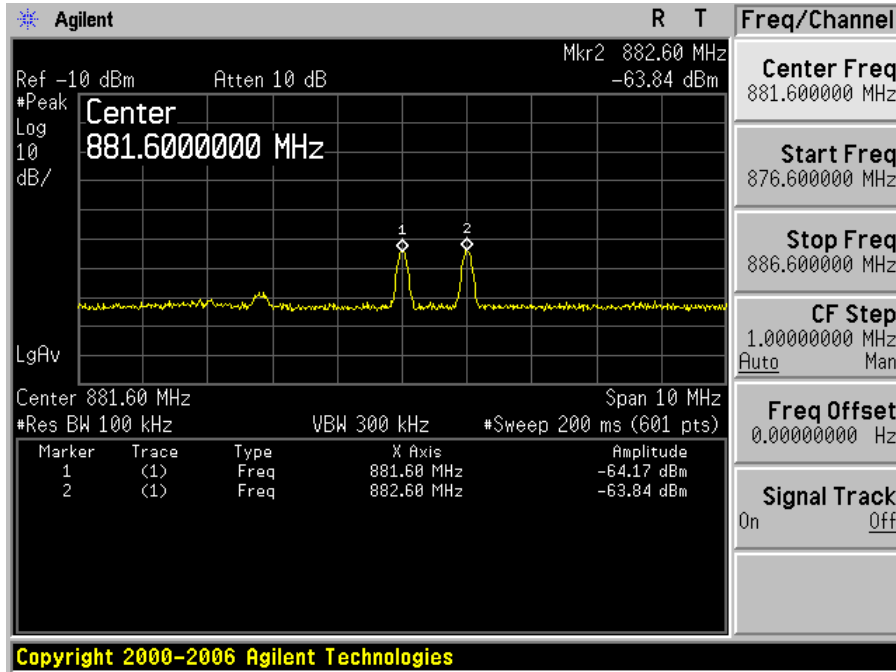


Output

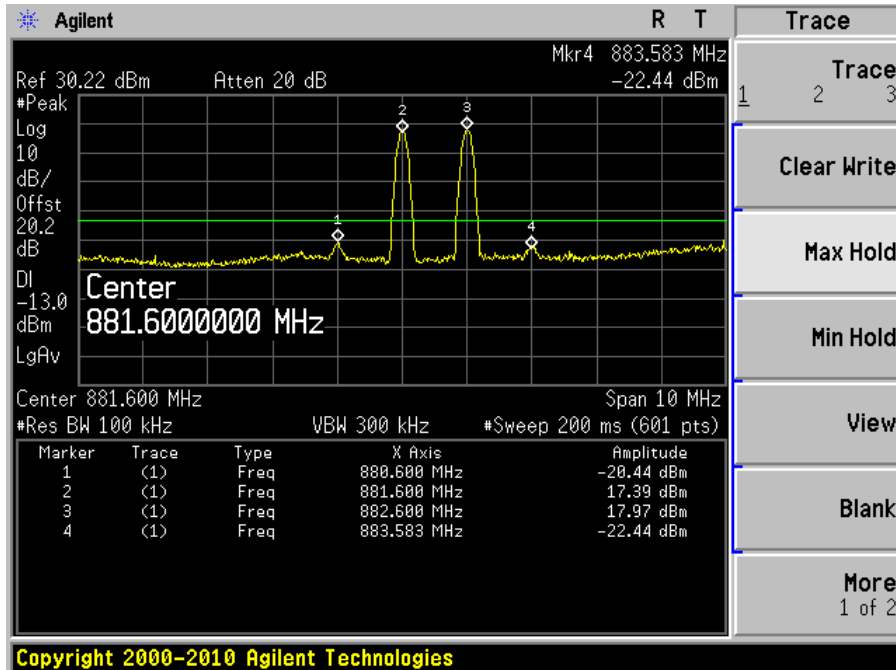


GSM/EDGE 850 MHz band High channel Downlink:

Input

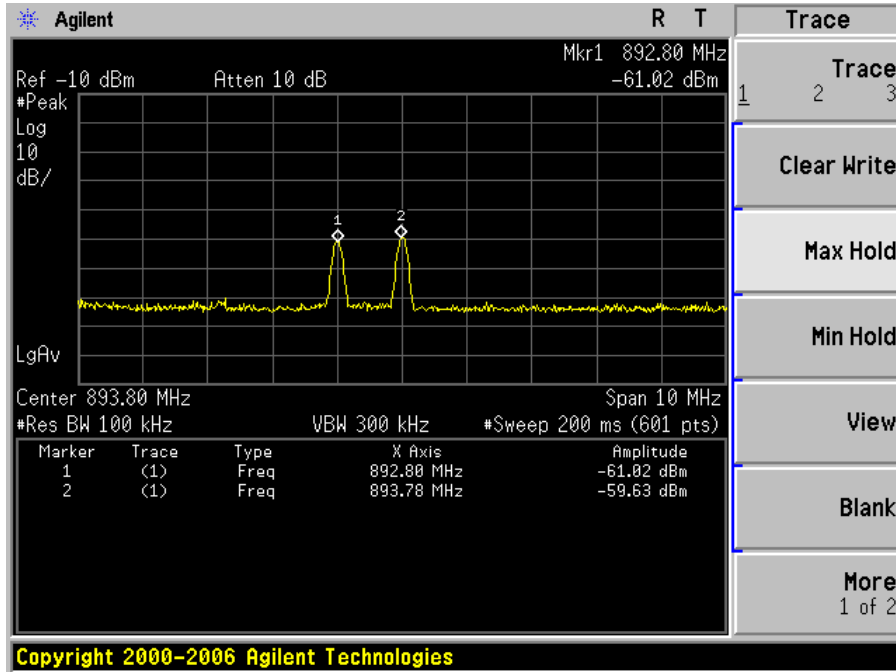


Output

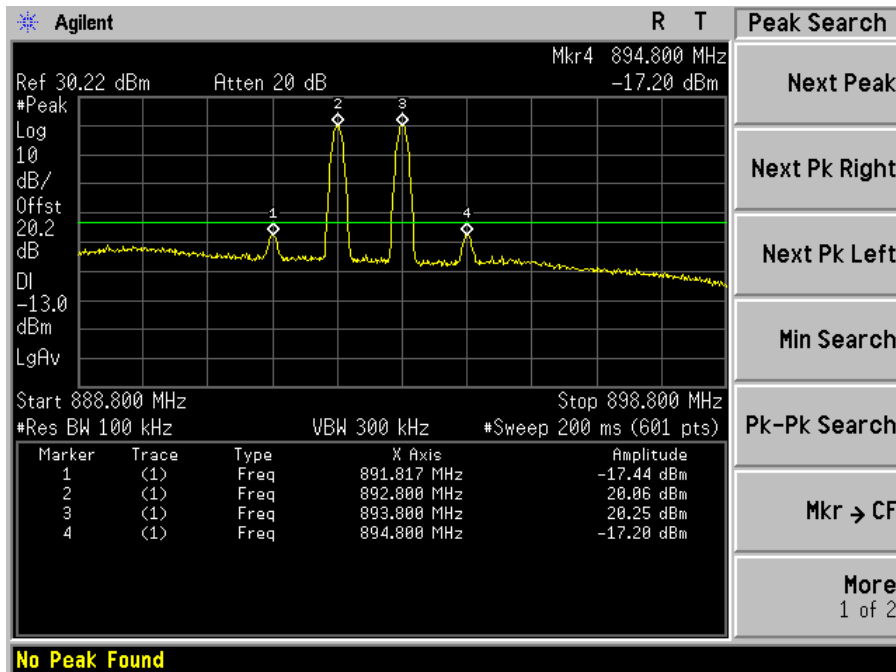


GSM/EDGE 1900 MHz band Low channel Downlink:

Input

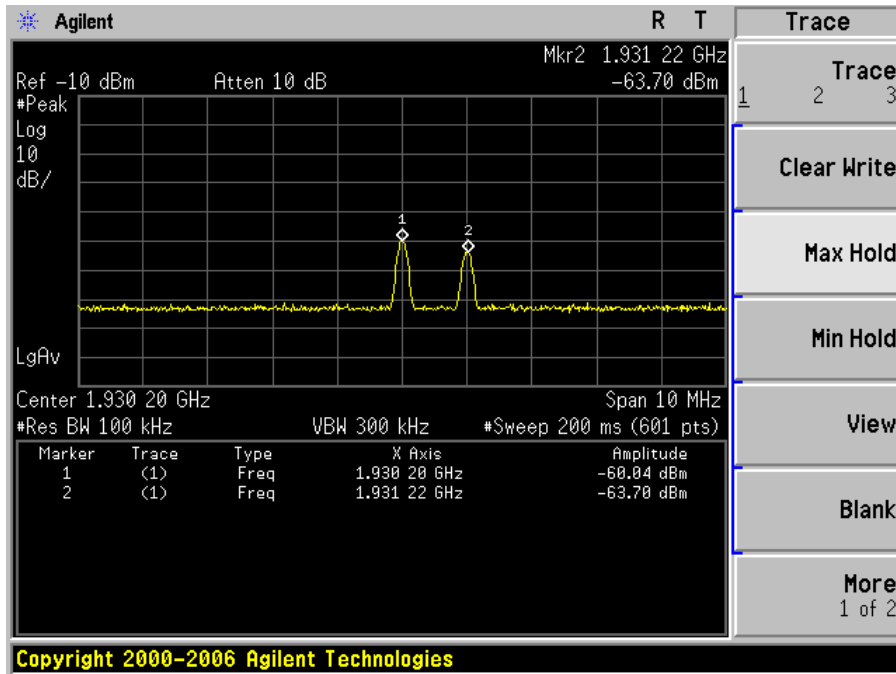


Output

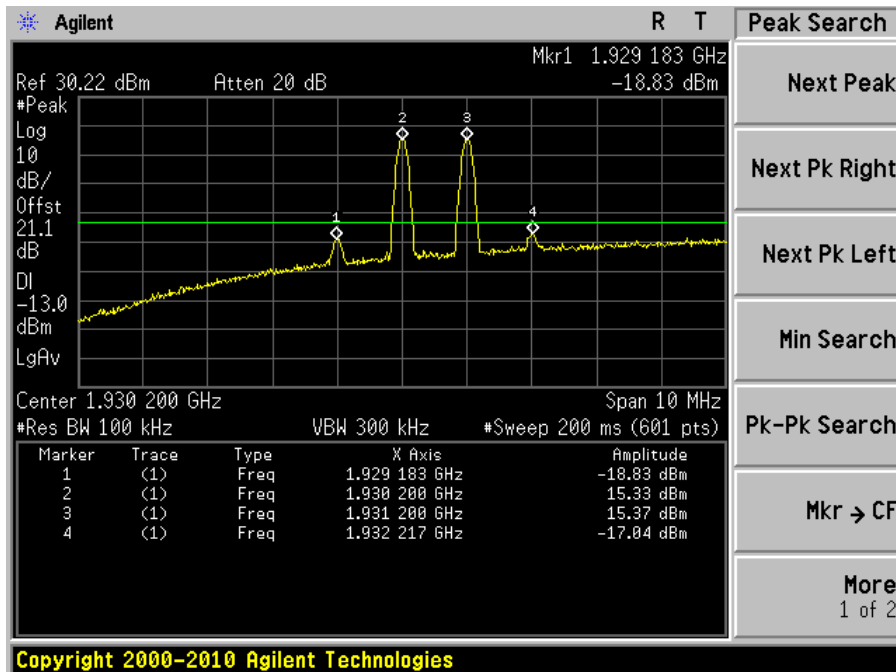


GSM/EDGE 1900 MHz band Middle channel Downlink:

Input

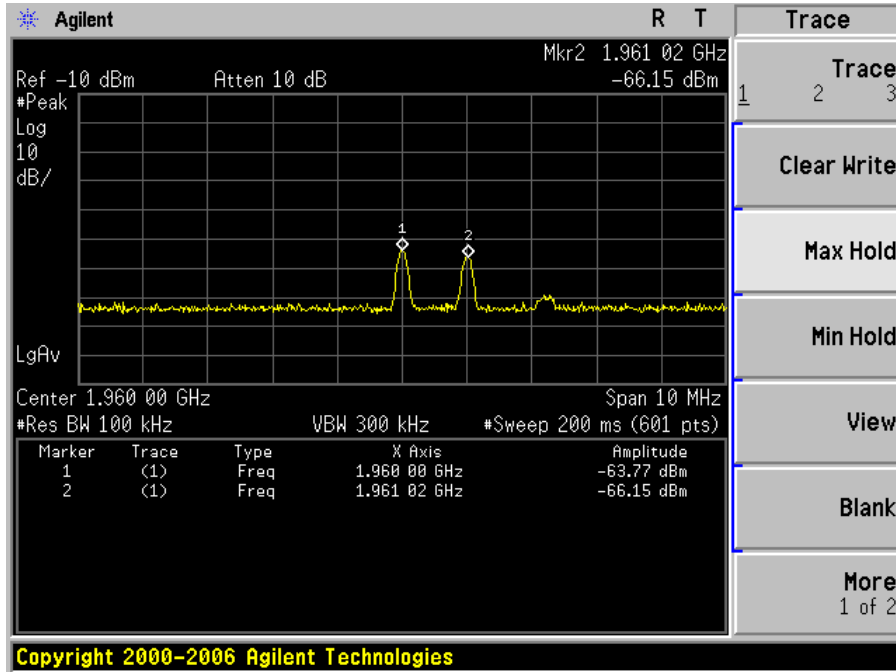


Output

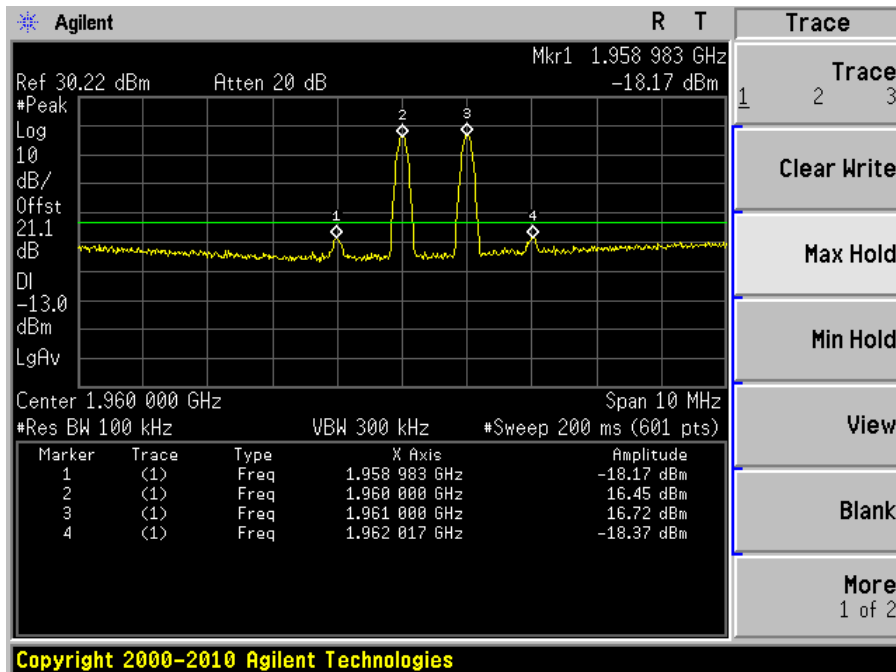


GSM/EDGE 1900 MHz band High channel Downlink:

Input

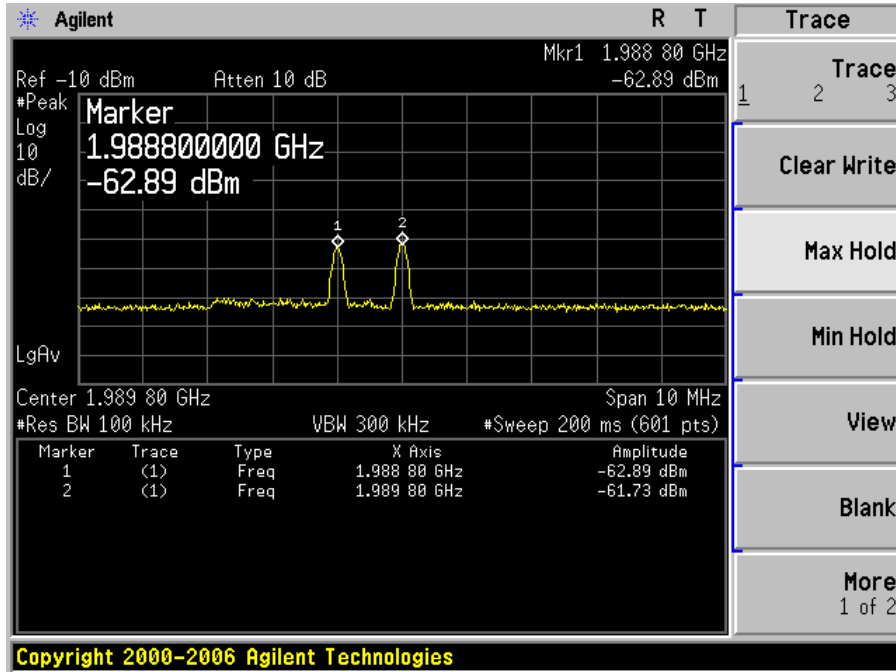


Output

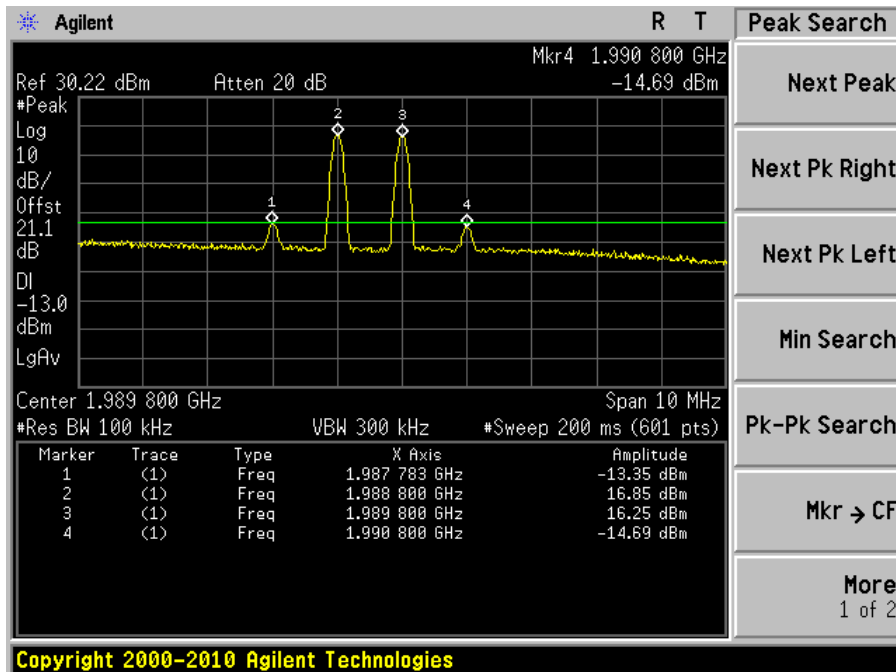


CDMA 850 MHz band Low channel Uplink:

Input

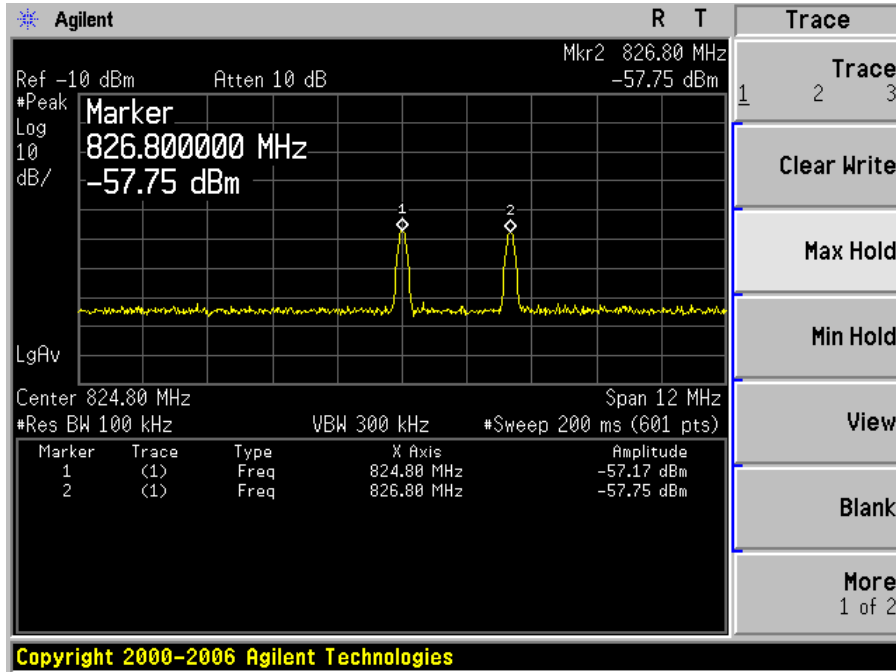


Output

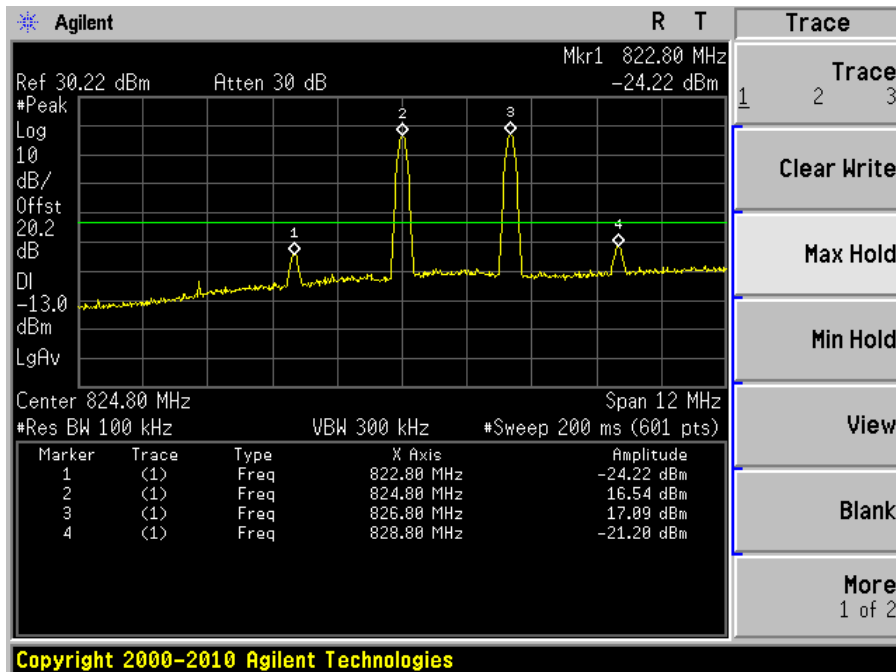


CDMA 850 MHz band Middle channel Uplink:

Input

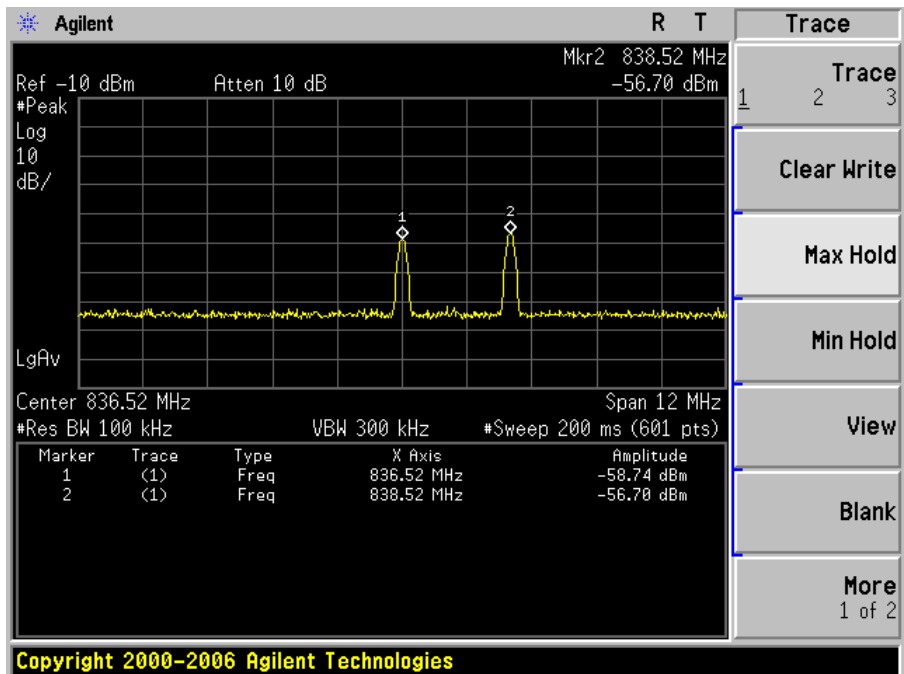


Output

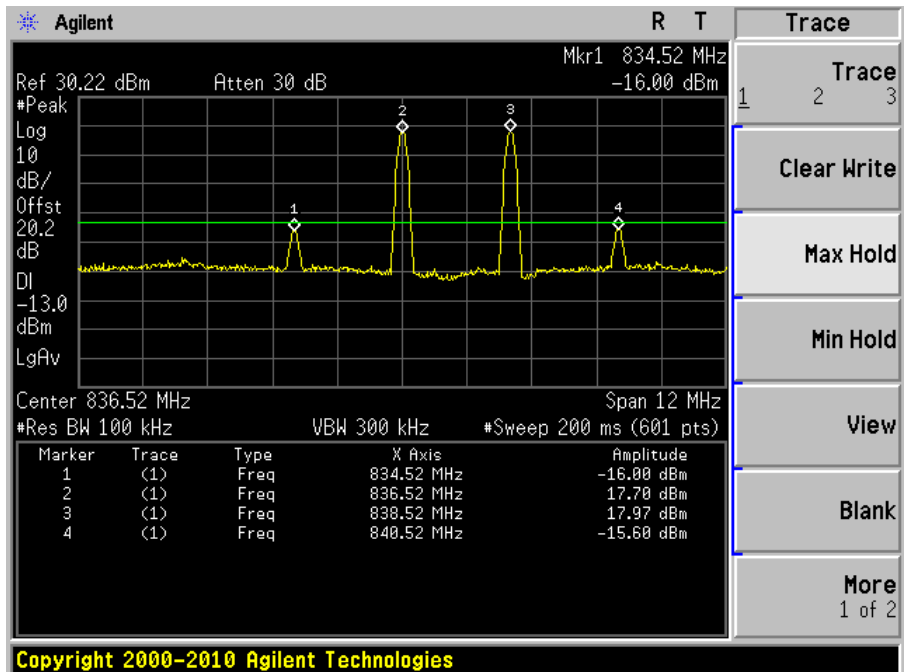


CDMA 850 MHz band High channel Uplink:

Input

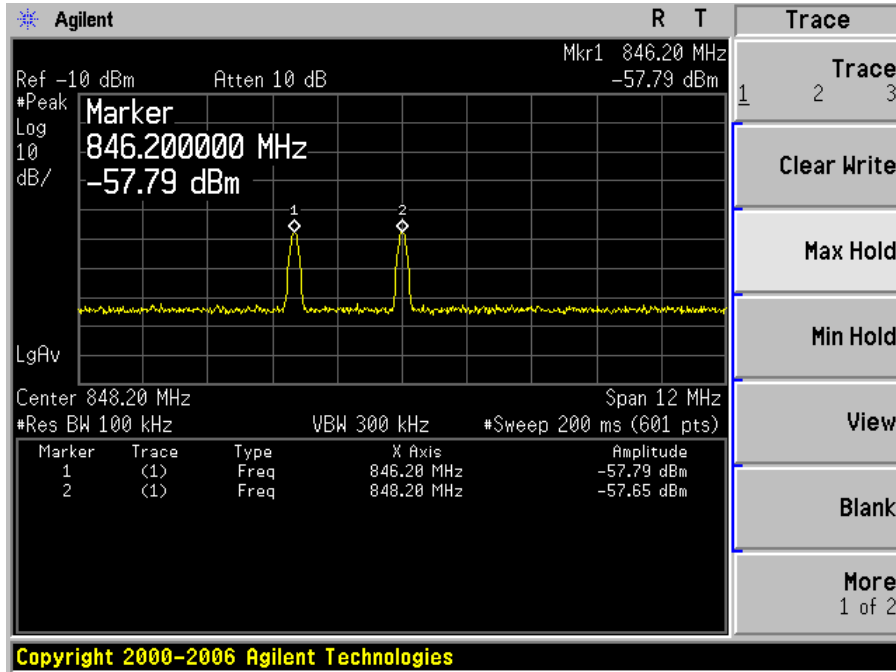


Output

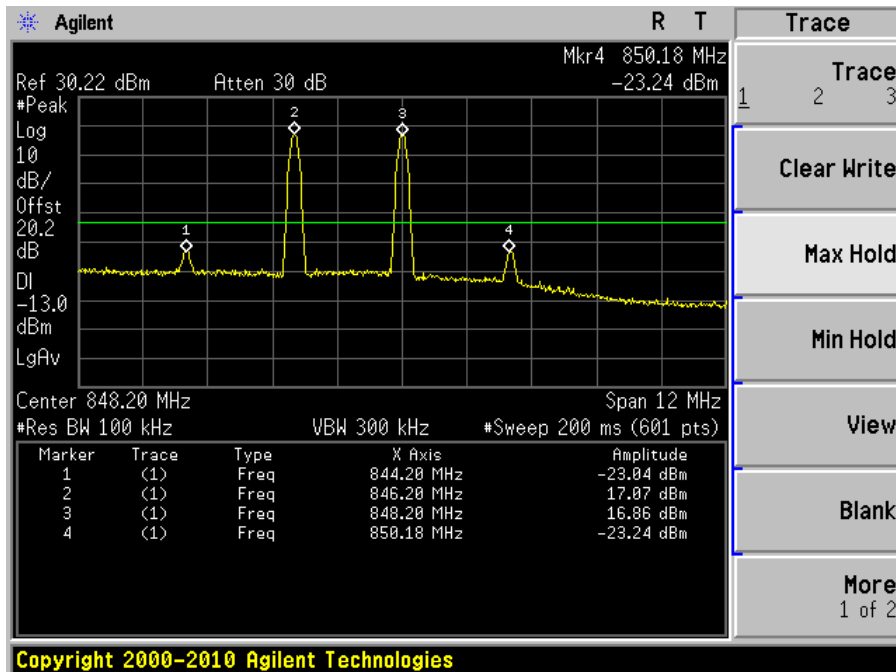


CDMA 1900 MHz band Low channel Uplink:

Input

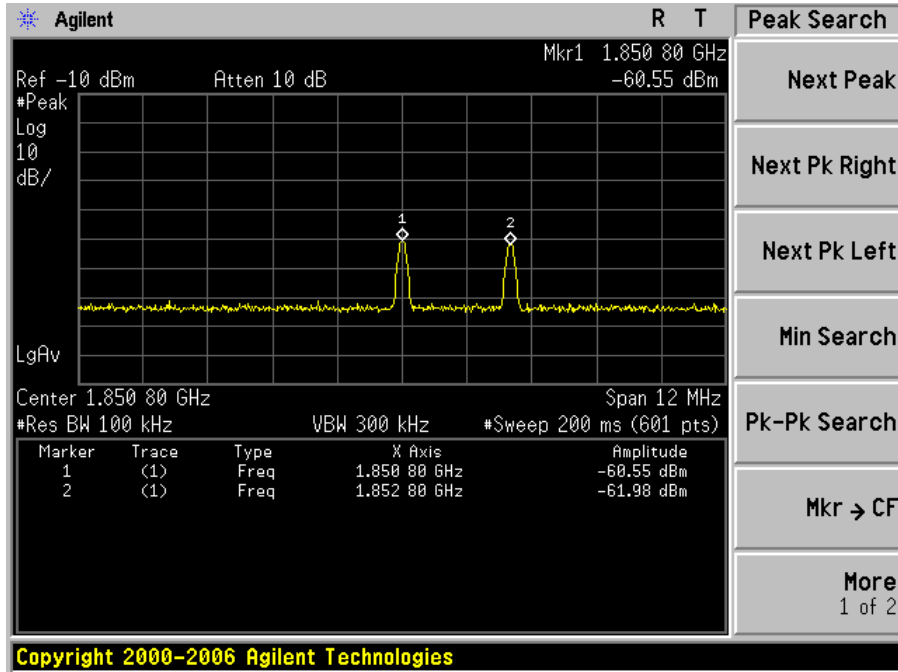


Output

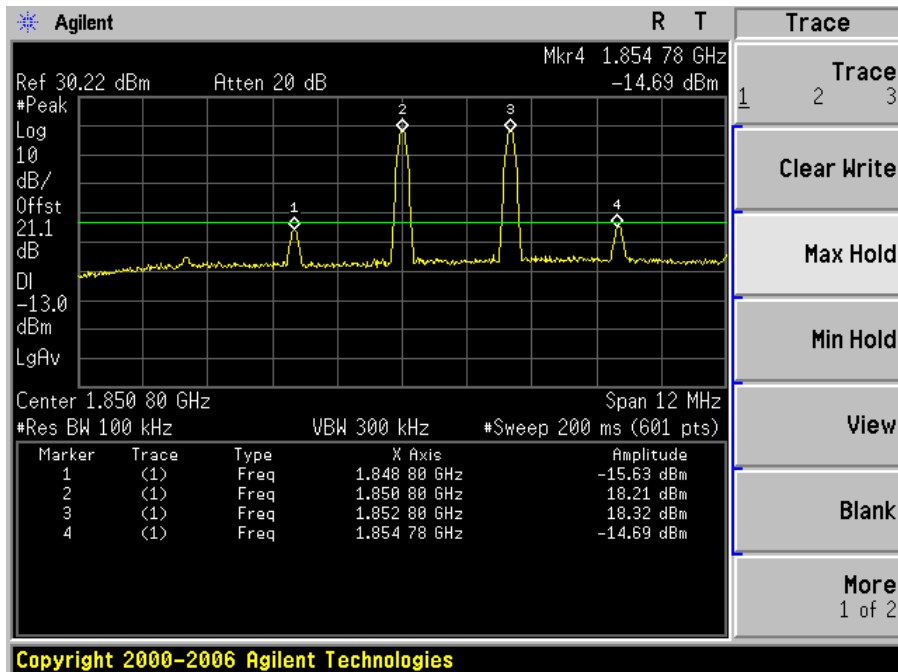


CDMA 1900 MHz band Middle channel Uplink:

Input

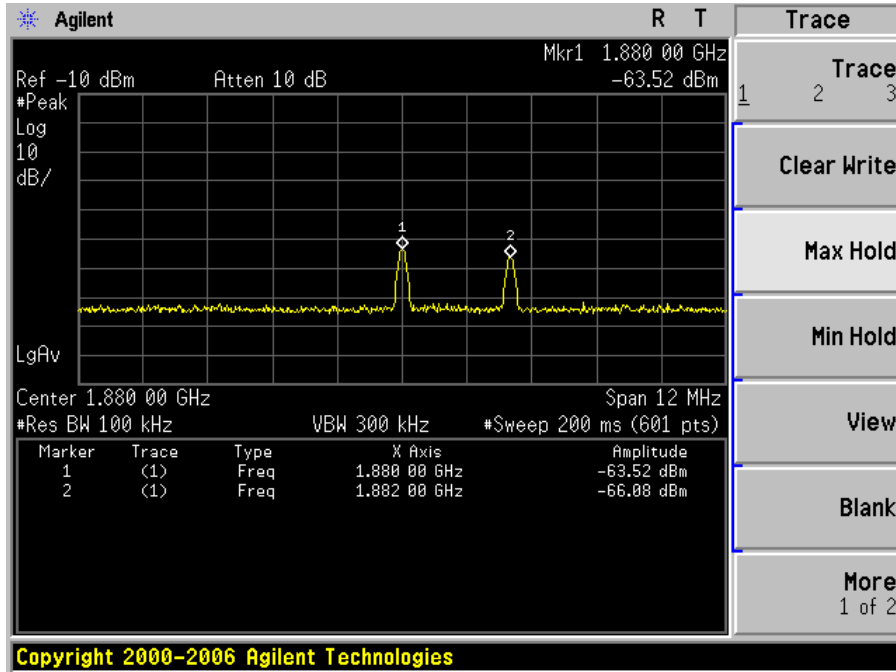


Output

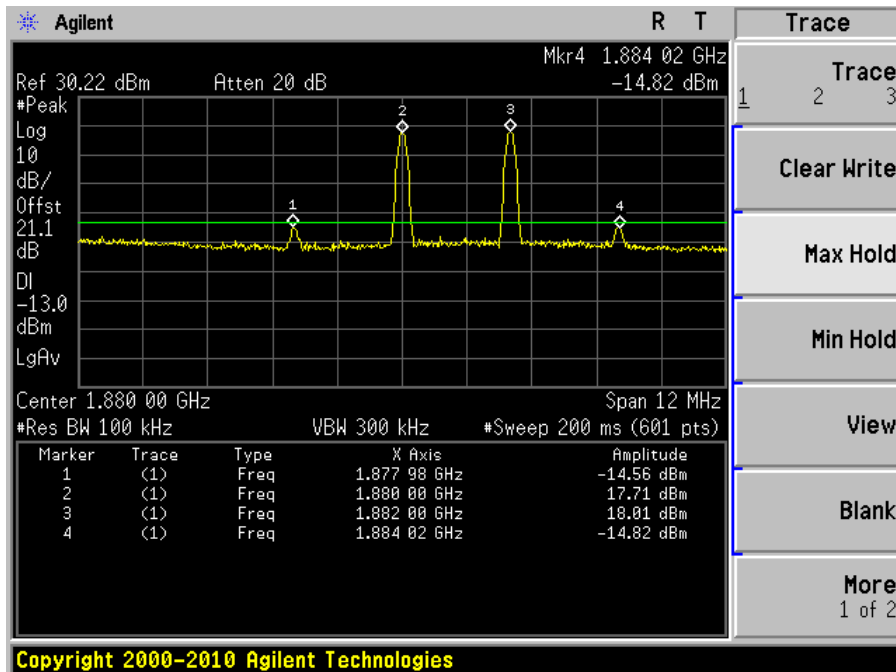


CDMA 1900 MHz band High channel Uplink:

Input

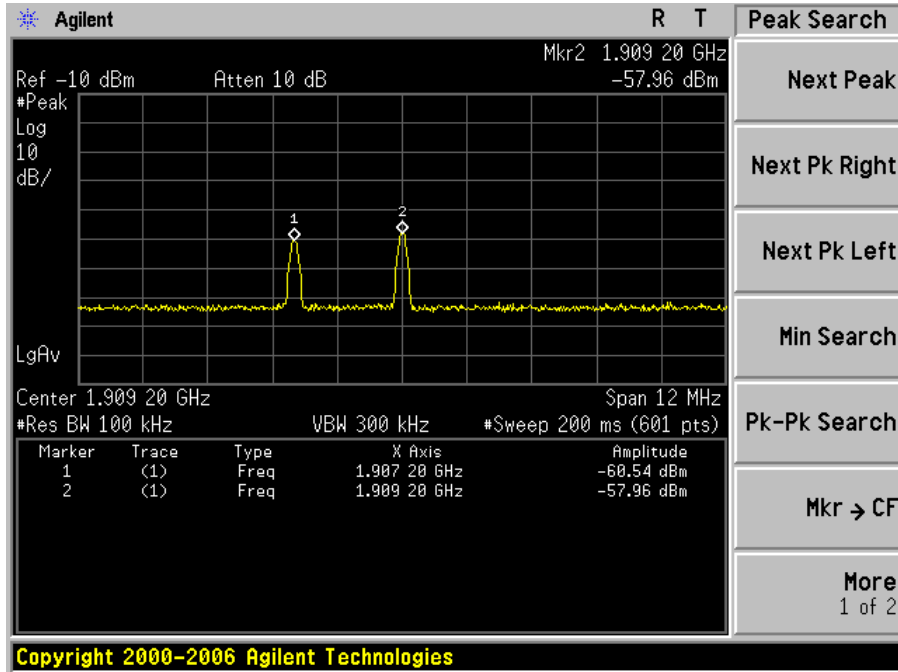


Output

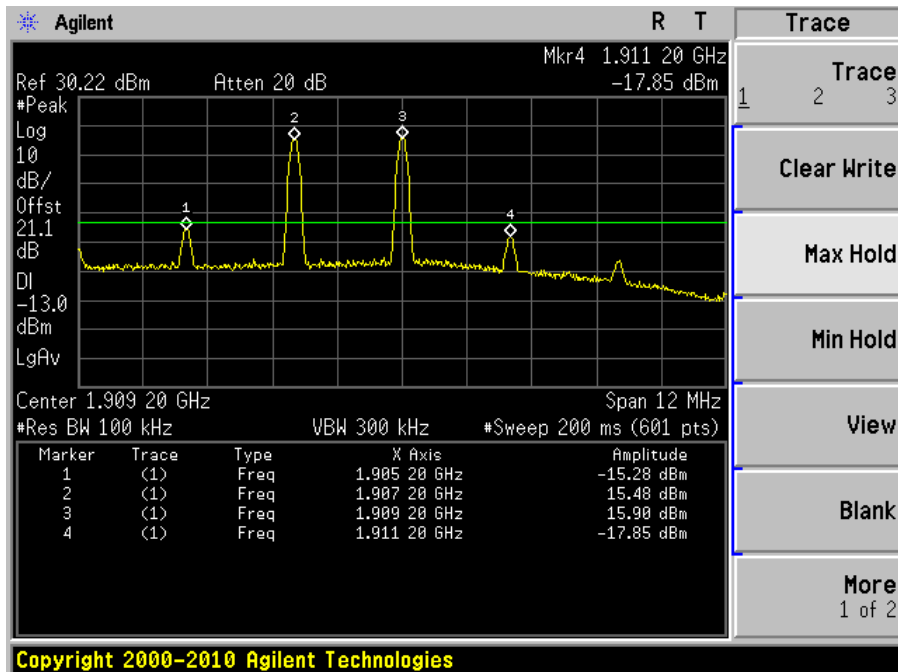


CDMA 850 MHz band Low channel Downlink:

Input

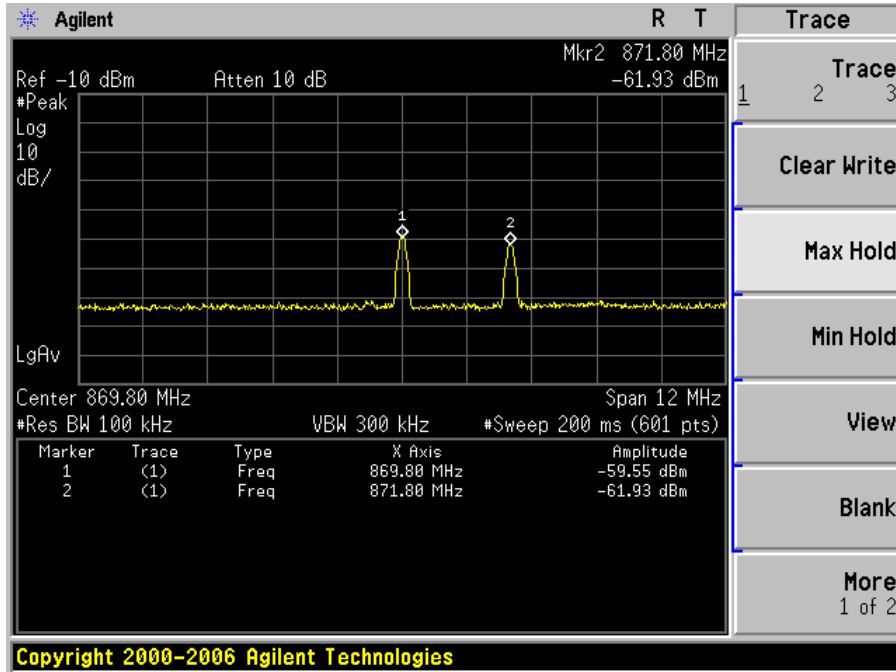


Output

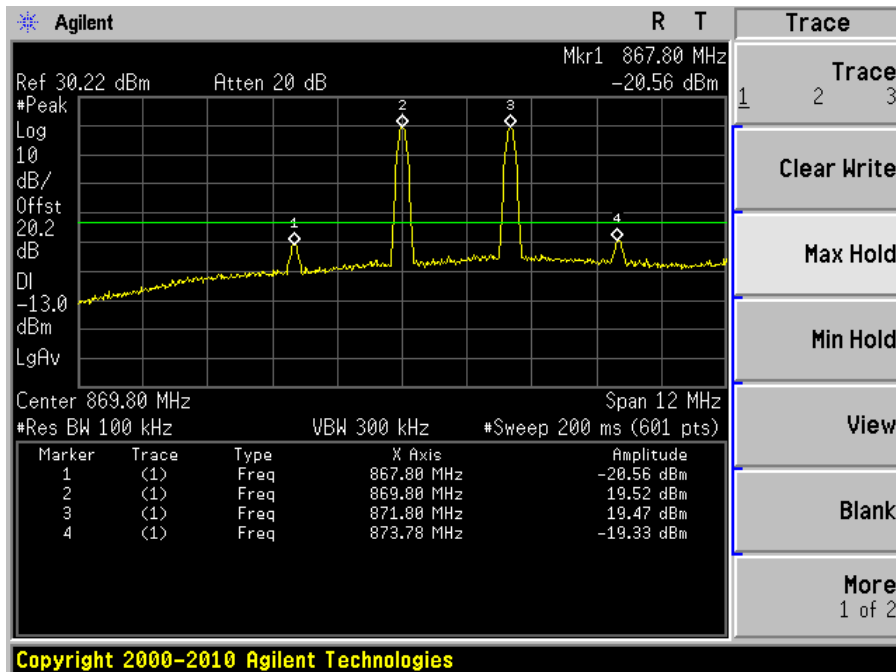


CDMA 850 MHz band Middle channel Downlink:

Input

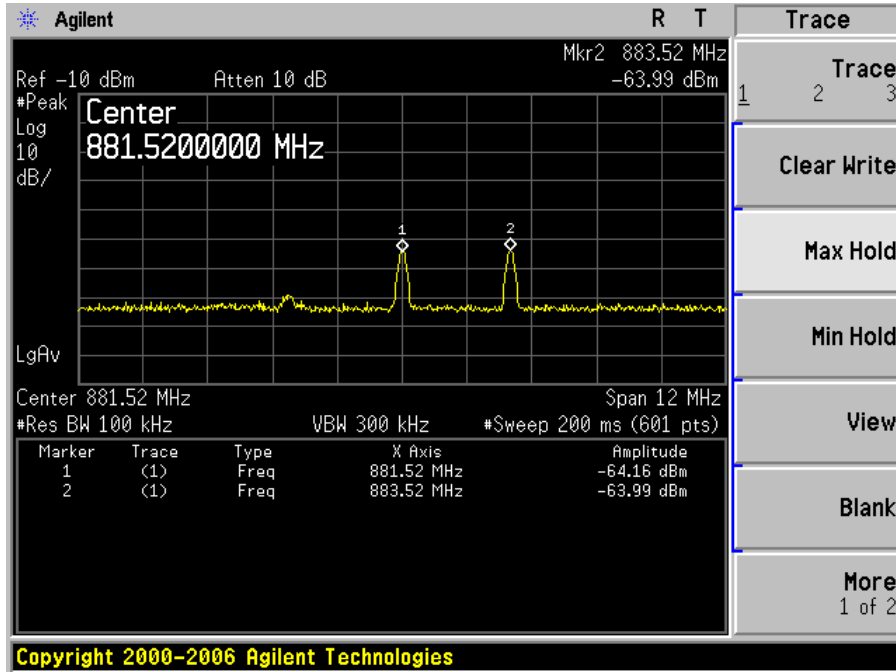


Output

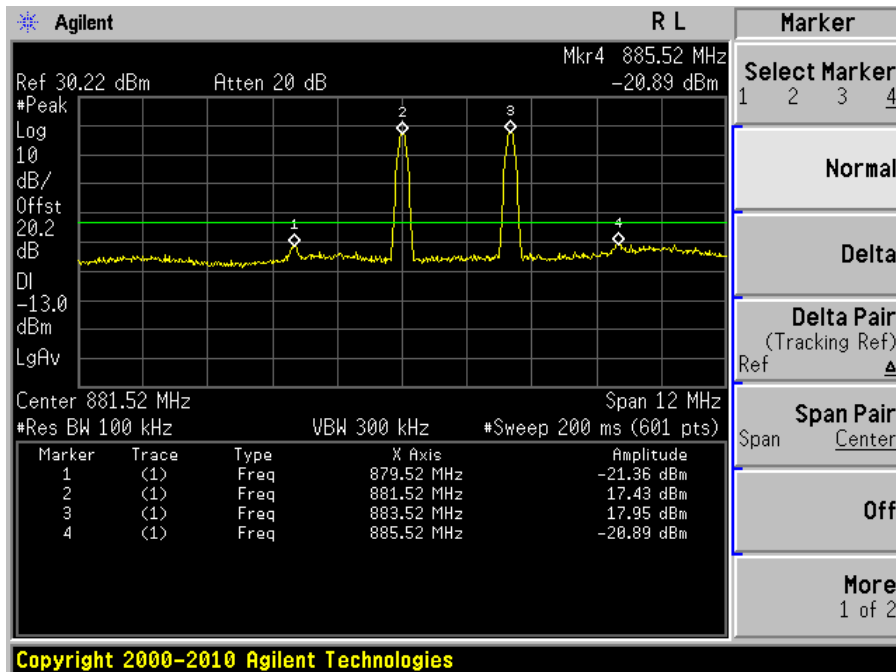


CDMA 850 MHz band High channel Downlink:

Input

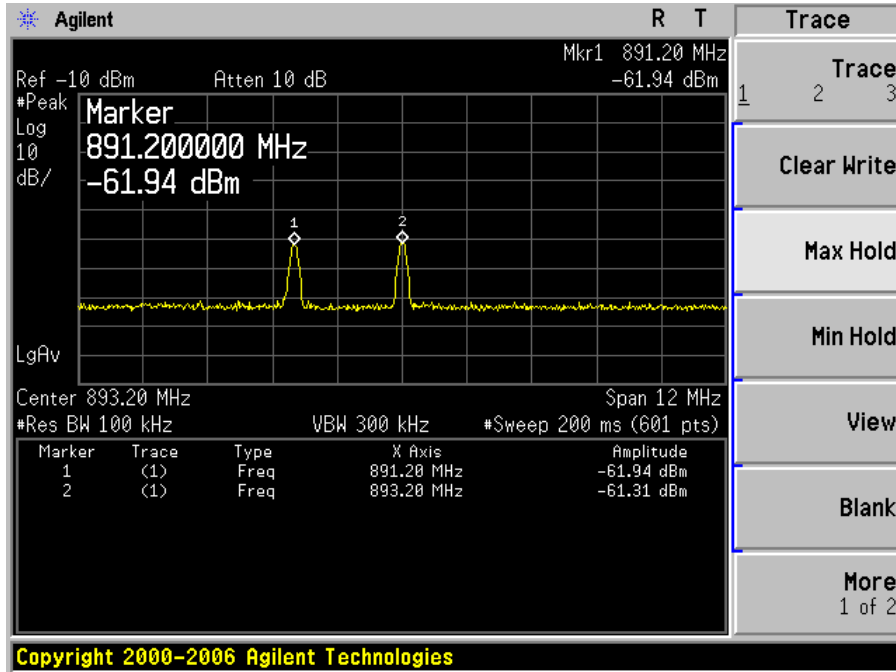


Output

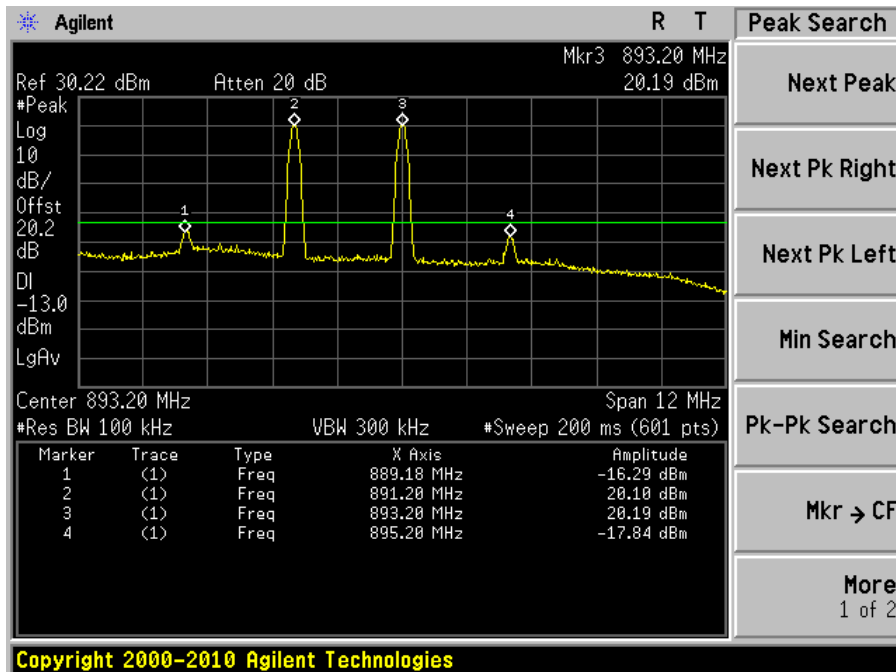


CDMA 1900 MHz band Low channel Downlink:

Input

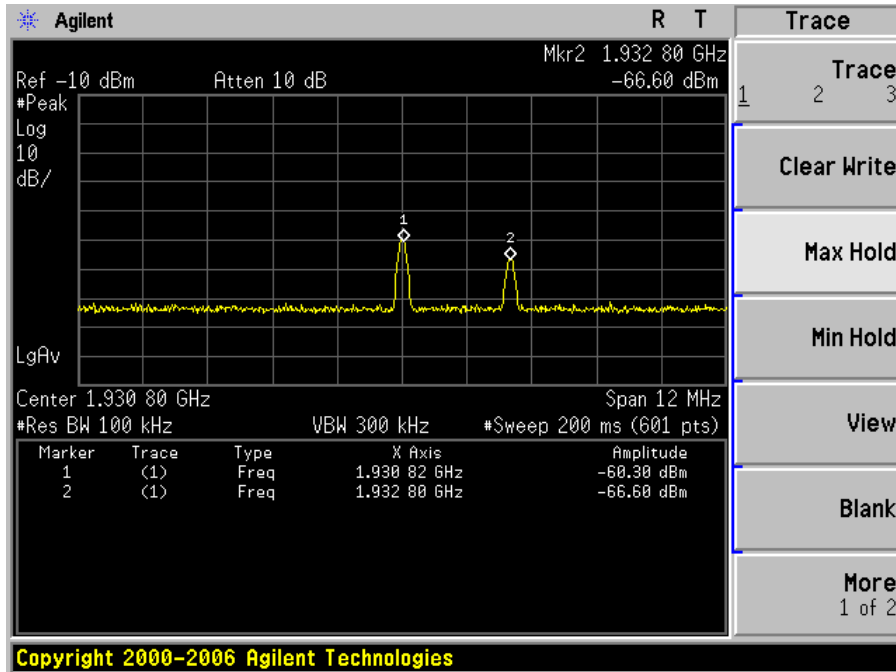


Output

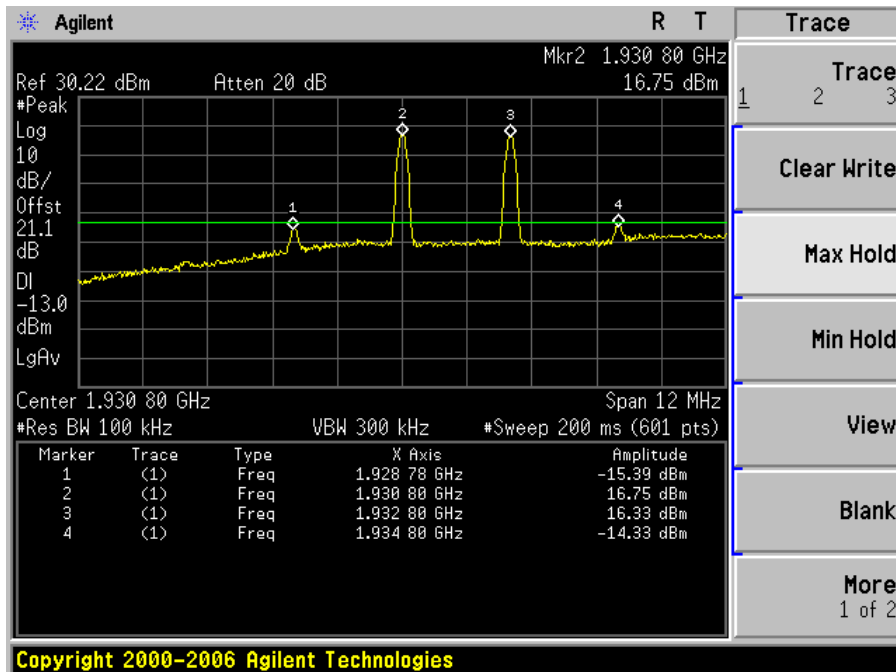


CDMA 1900 MHz band Middle channel Downlink:

Input

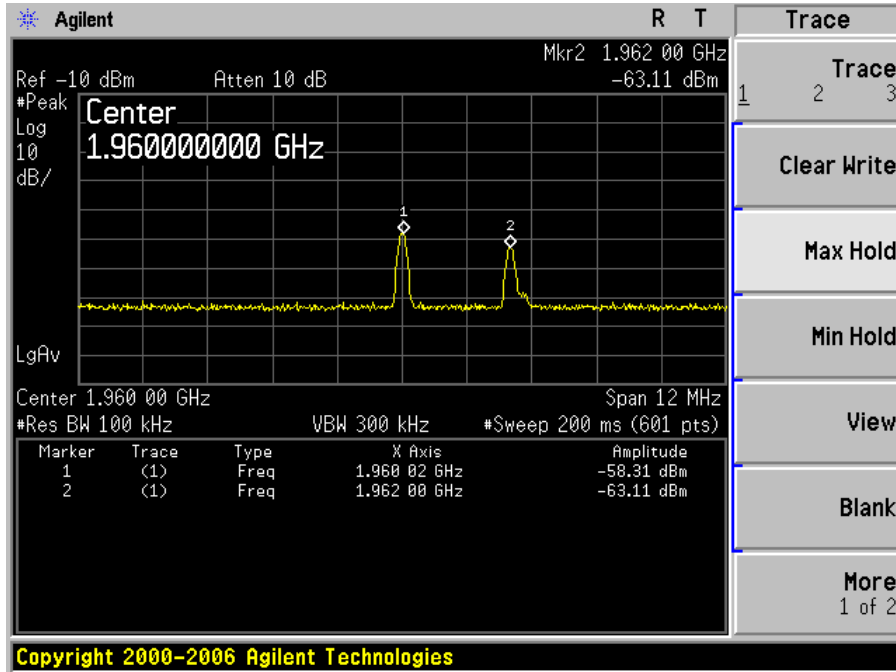


Output

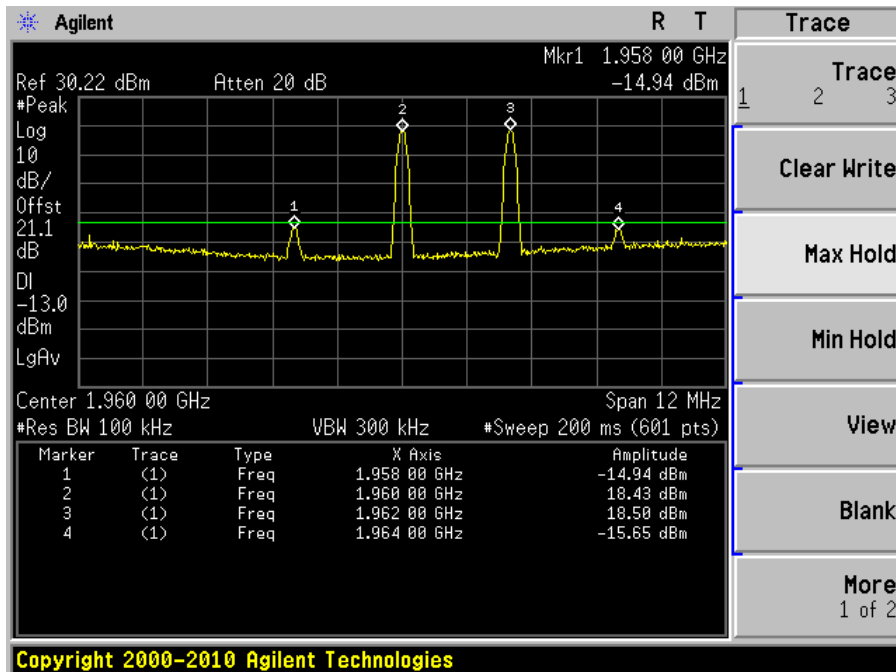


CDMA 1900 MHz band High channel Downlink:

Input

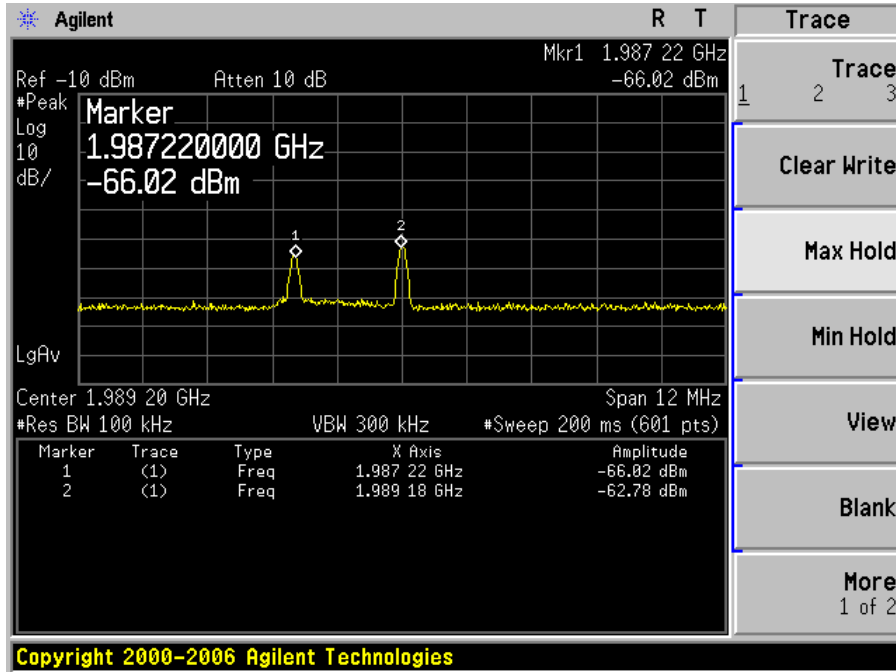


Output

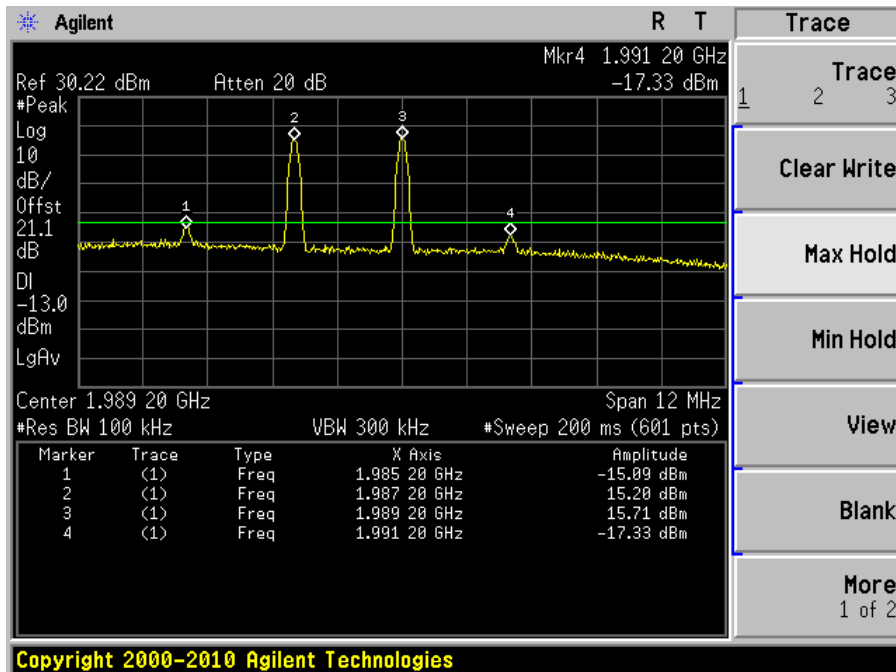


WCDMA 850 MHz band Low channel Uplink:

Input

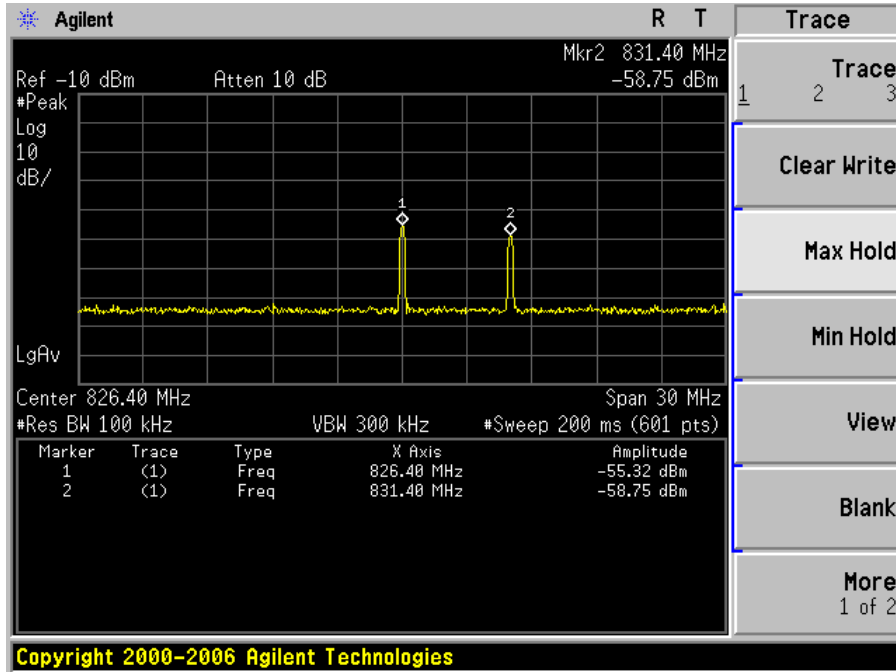


Output

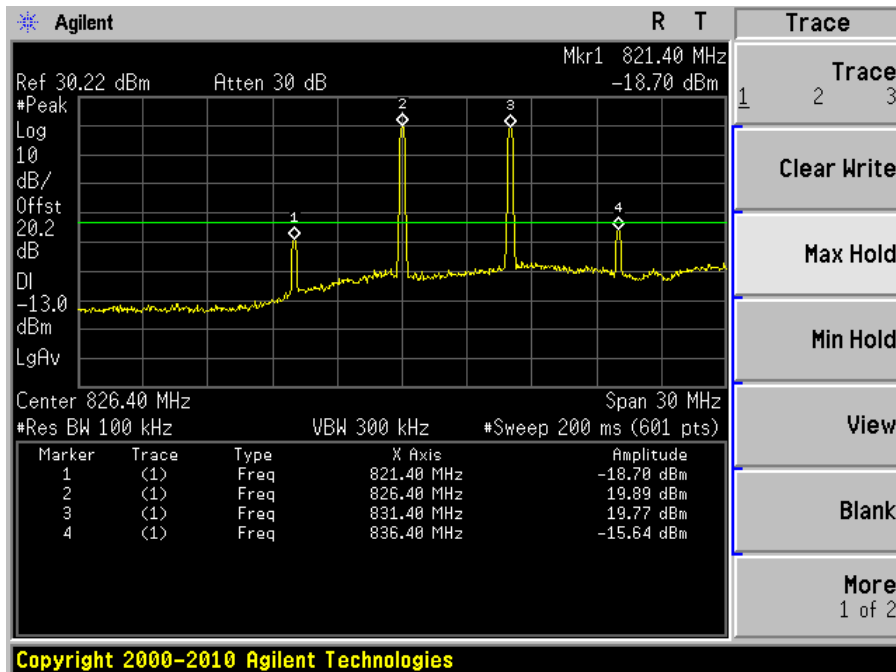


WCDMA 850 MHz band Middle channel Uplink:

Input

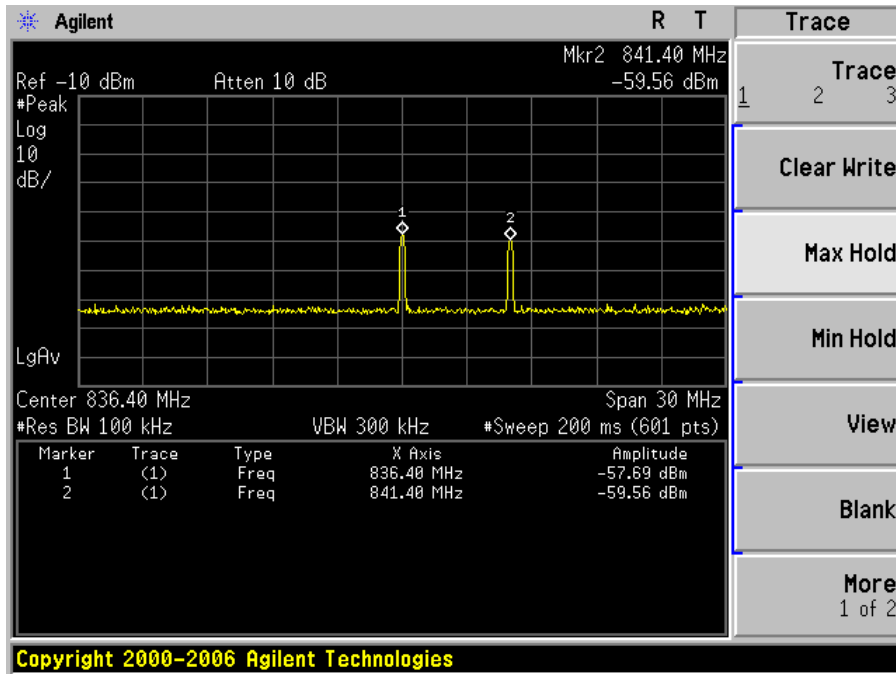


Output

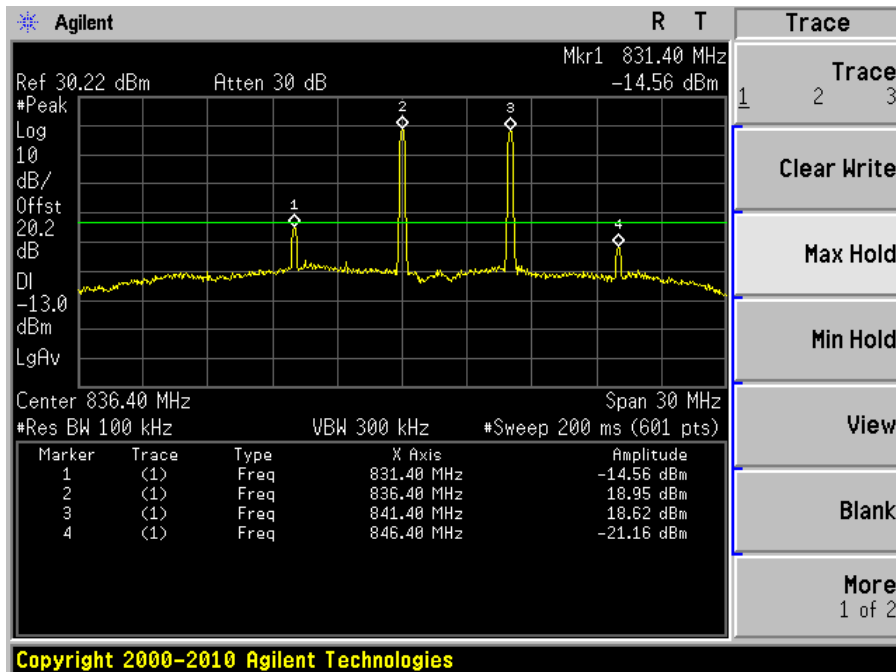


WCDMA 850 MHz band High channel Uplink:

Input

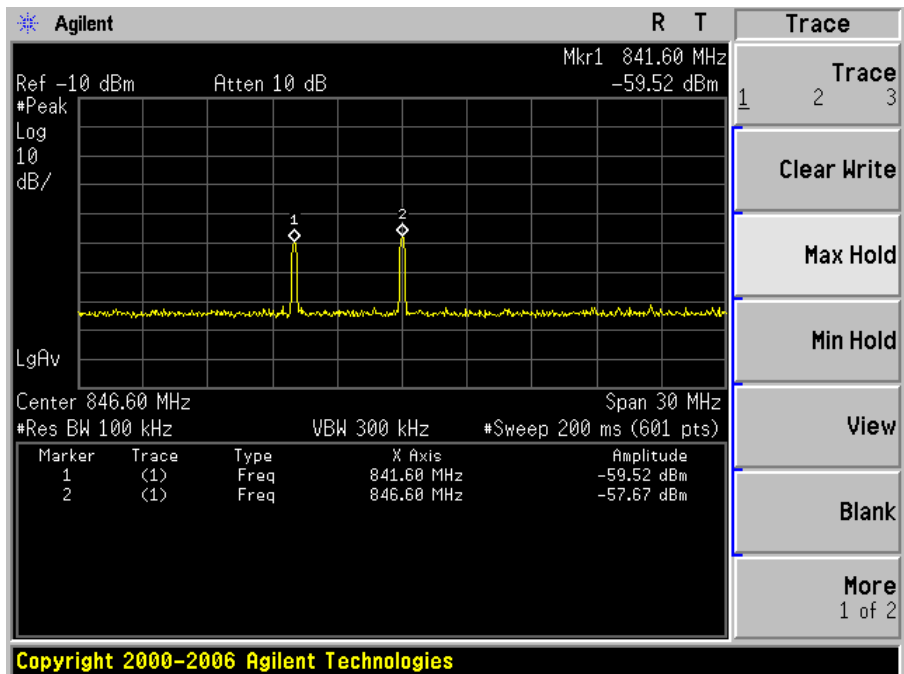


Output

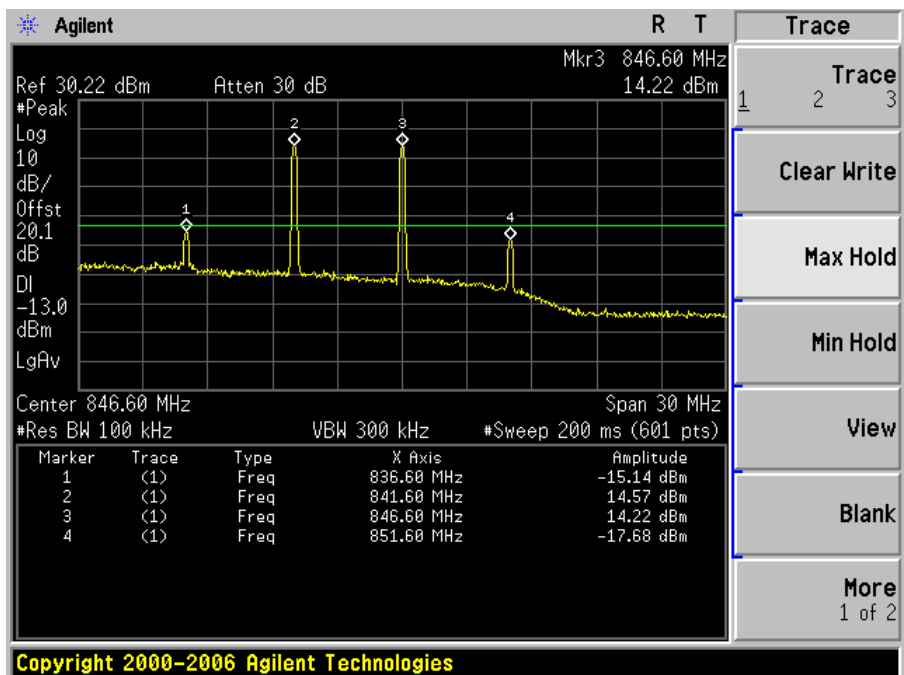


WCDMA 1900 MHz band Low channel Uplink:

Input

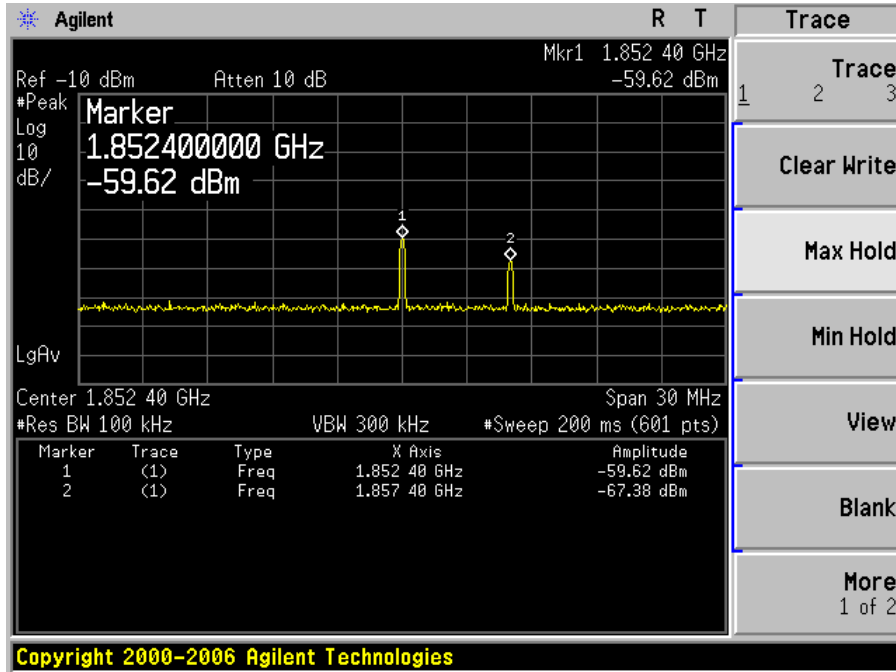


Output

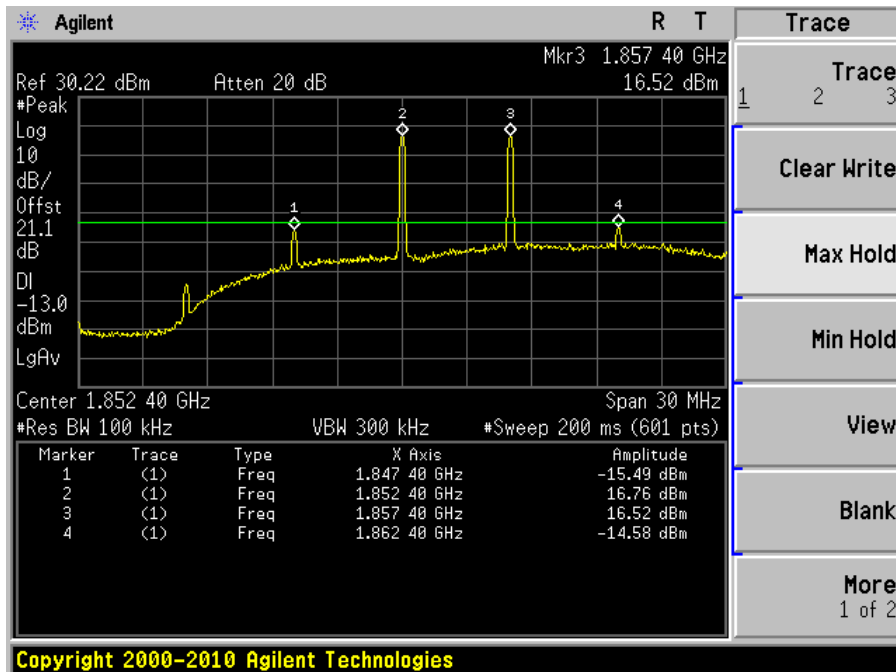


WCDMA 1900 MHz band Middle channel Uplink:

Input

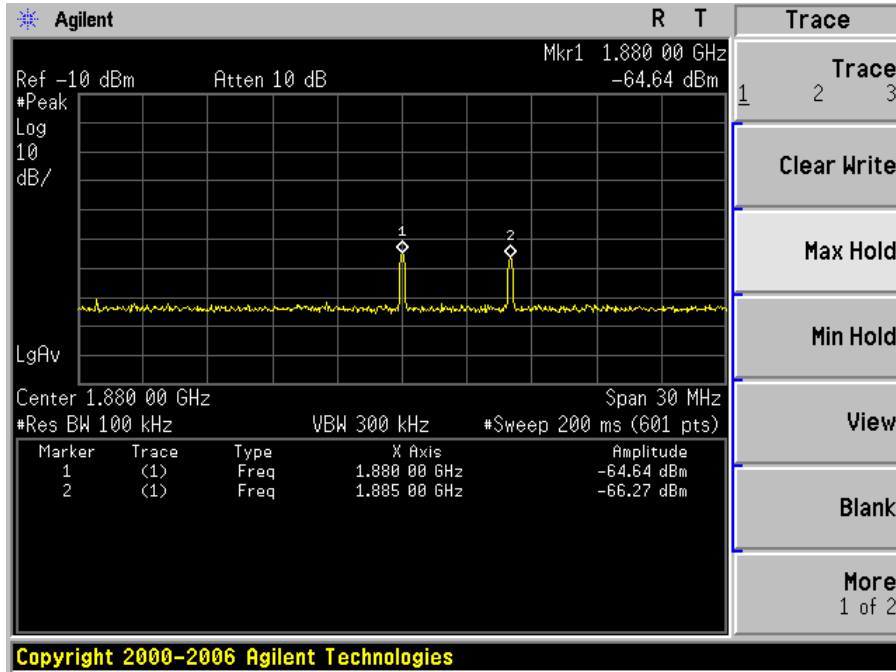


Output

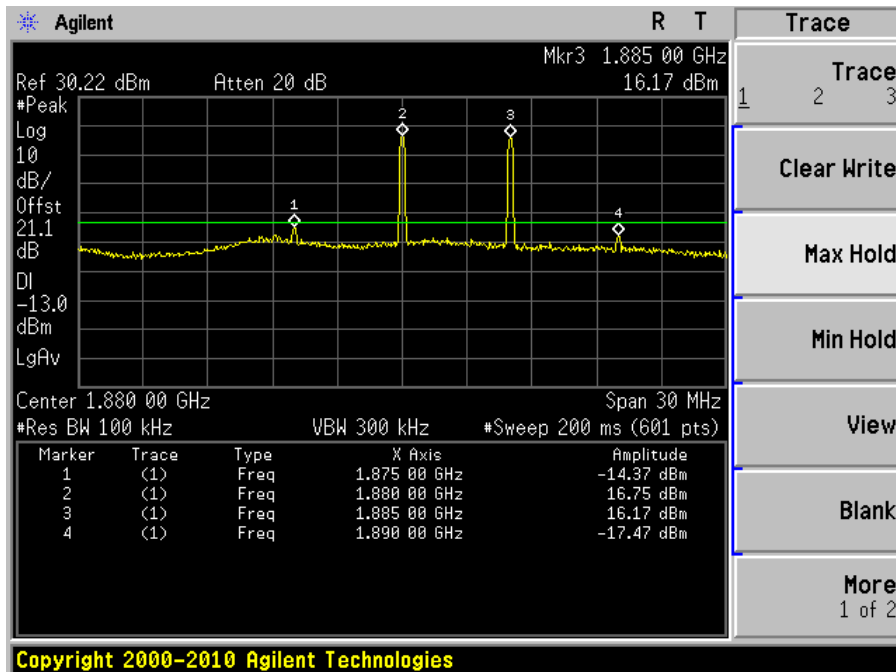


WCDMA 1900 MHz band High channel Uplink:

Input

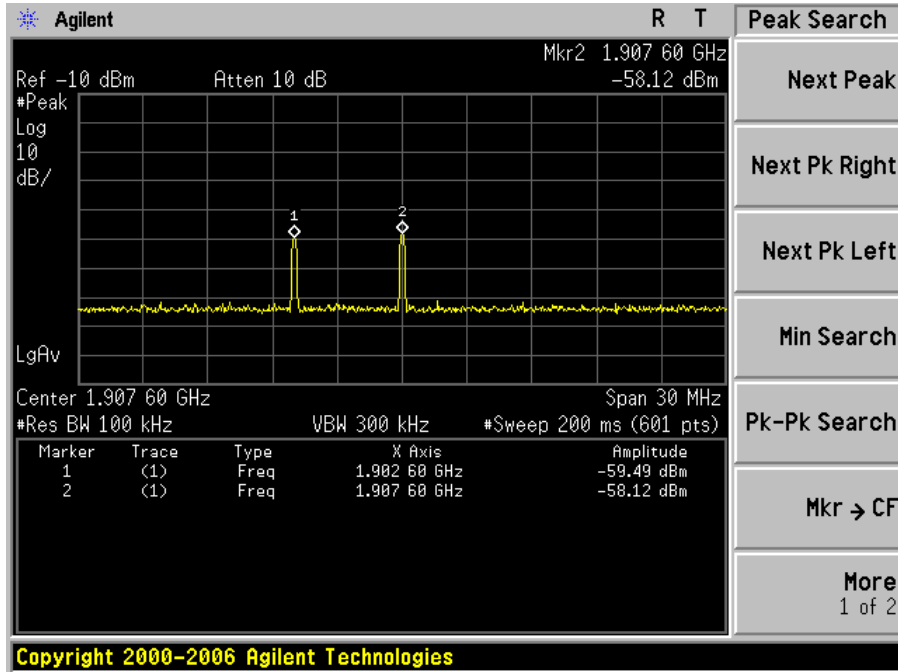


Output

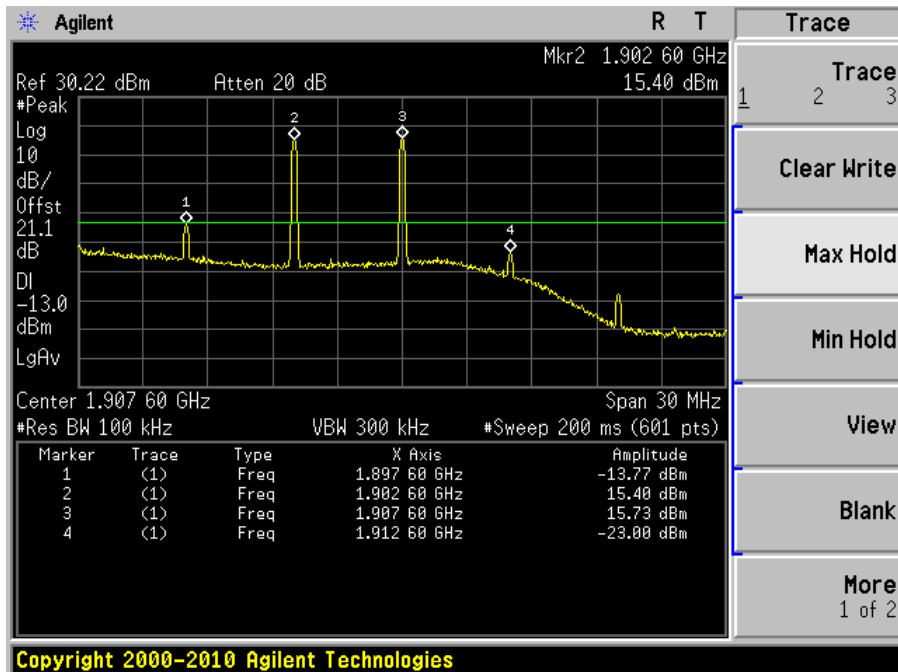


WCDMA 850 MHz band Low channel Downlink:

Input

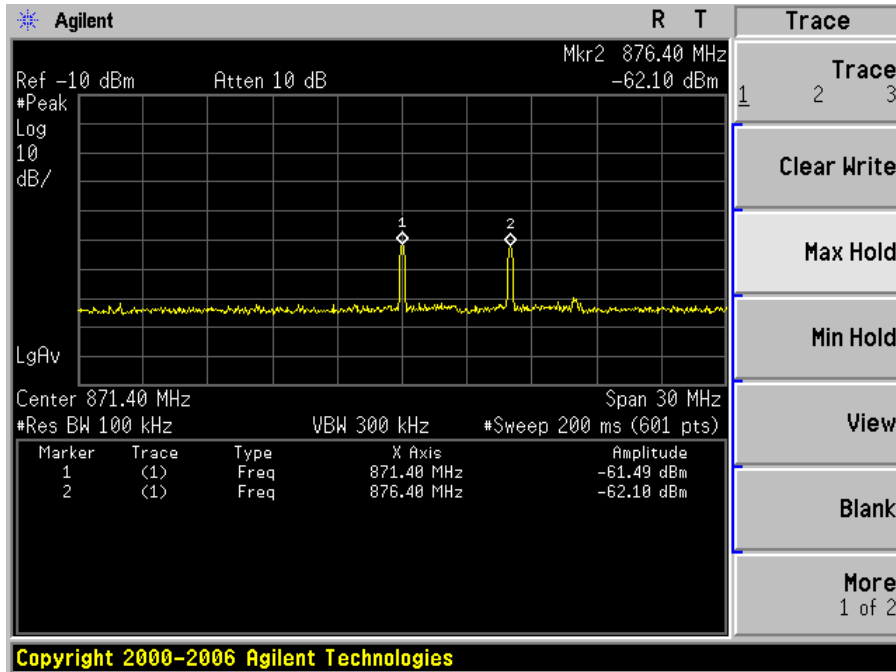


Output

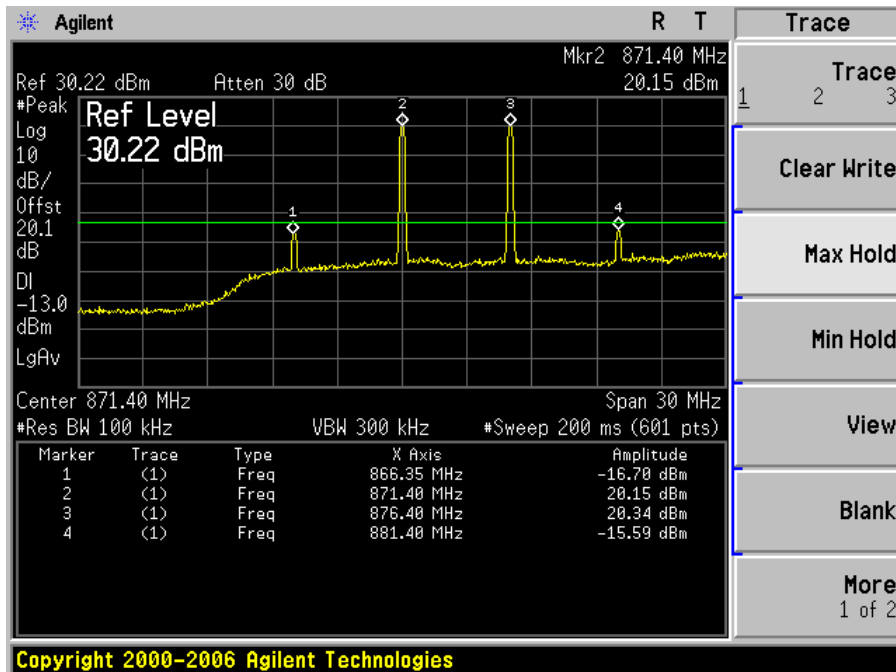


WCDMA 850 MHz band Middle channel Downlink:

Input

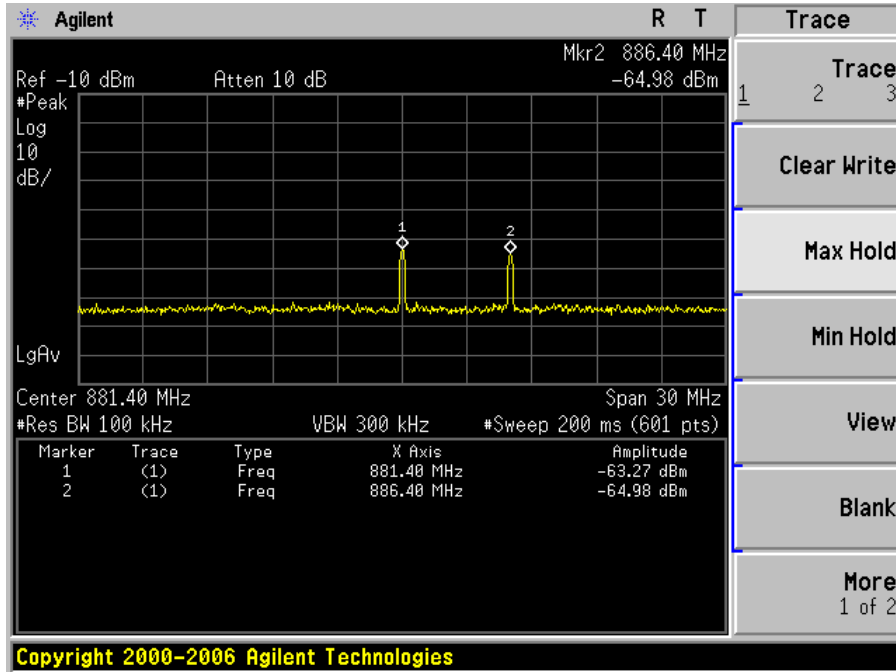


Output

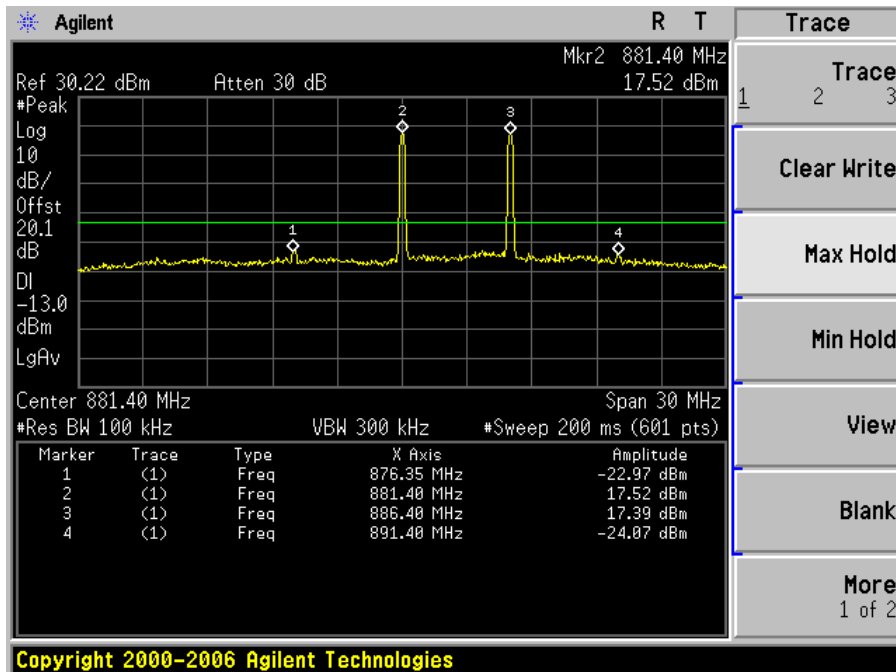


WCDMA 850 MHz band High channel Downlink:

Input

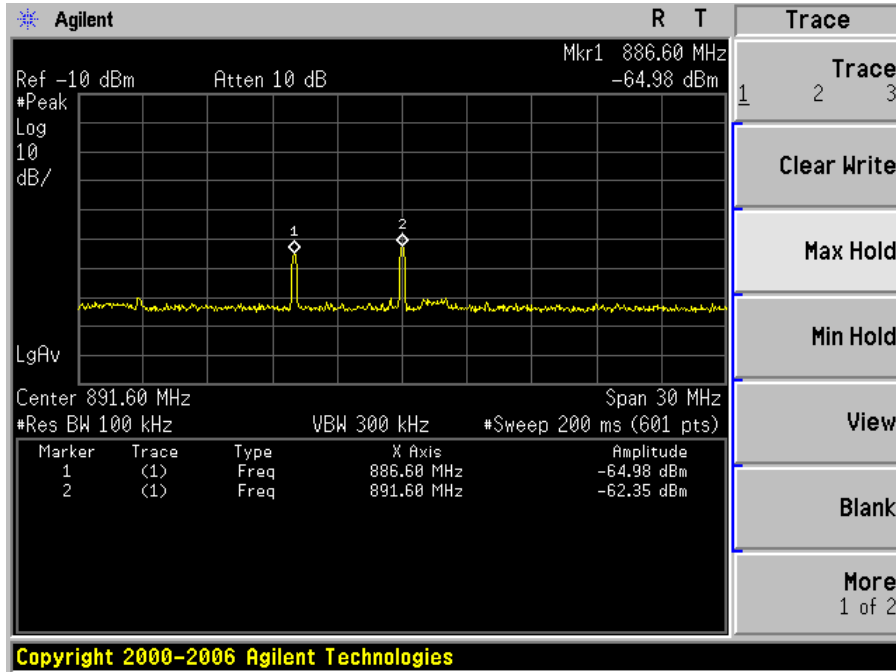


Output

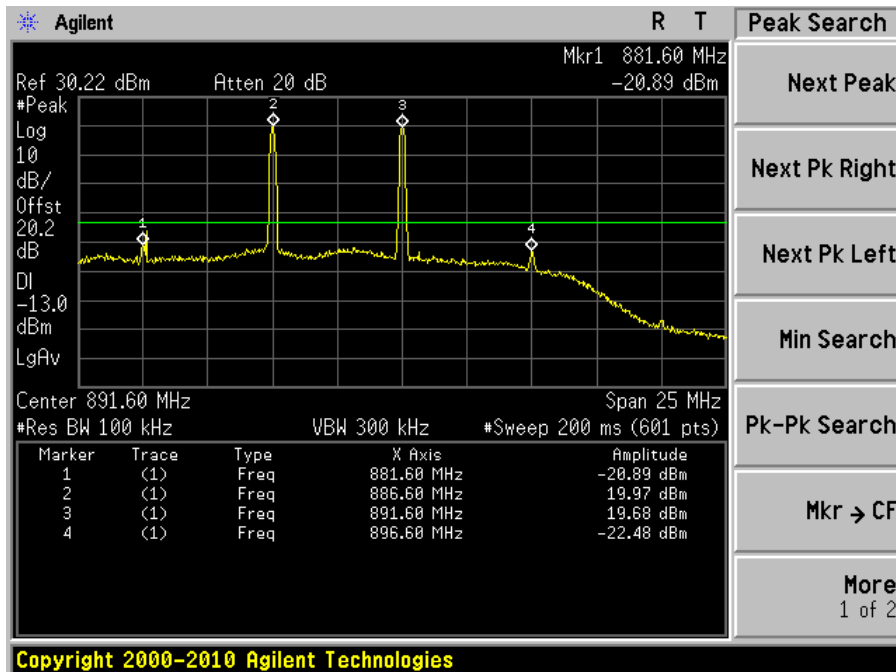


WCDMA 1900 MHz band Low channel Downlink:

Input

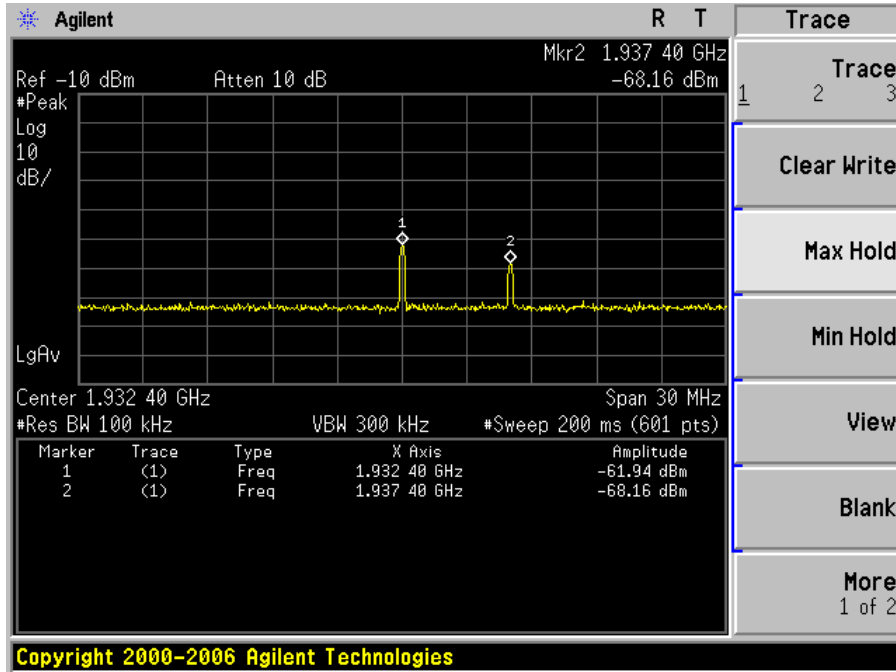


Output

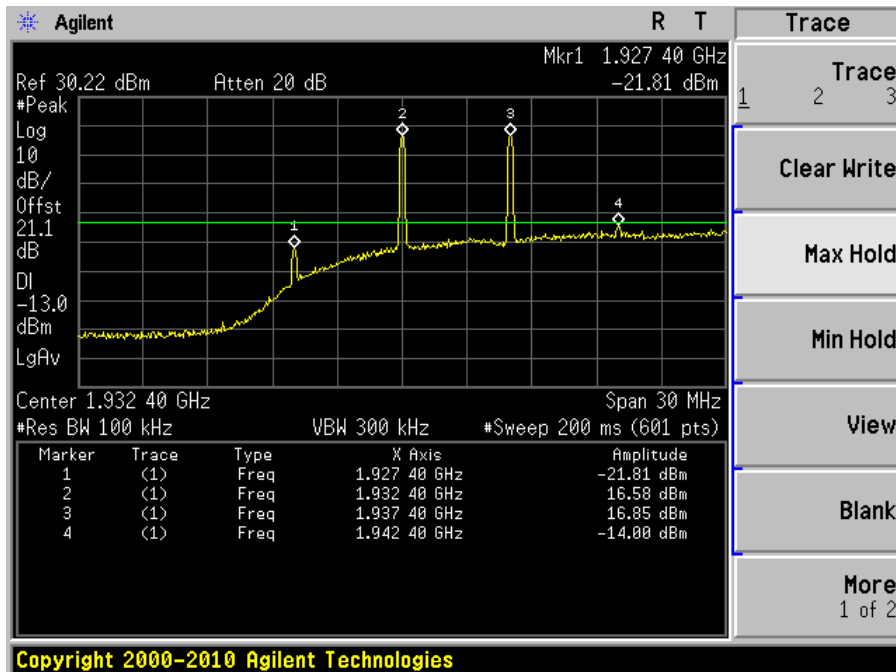


WCDMA 1900 MHz band Middle channel Downlink:

Input

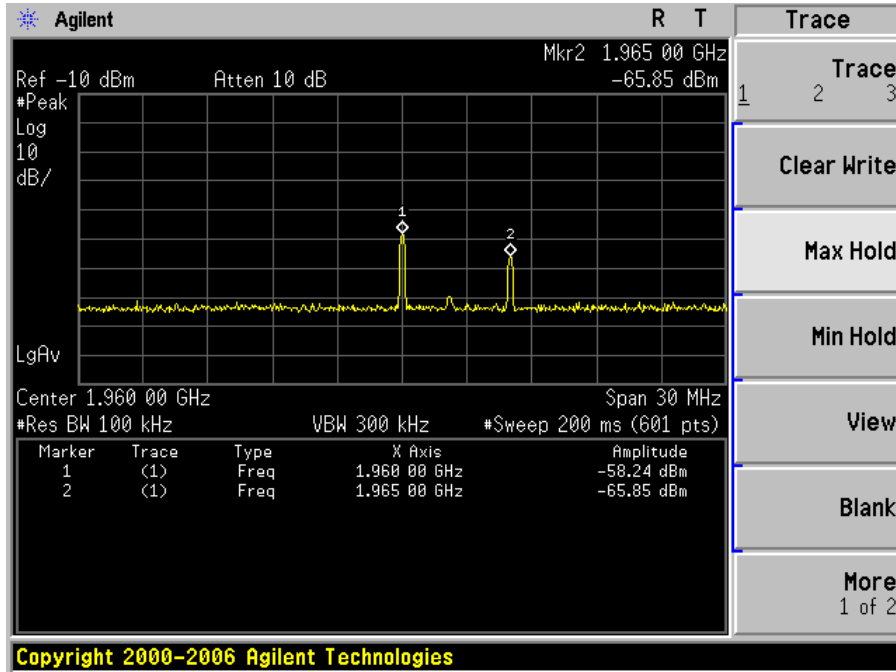


Output

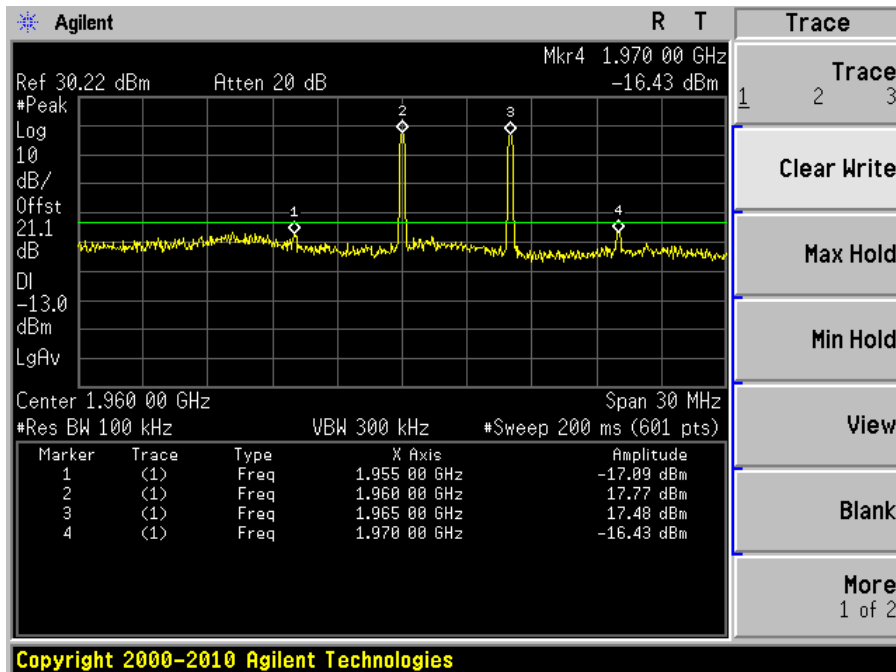


WCDMA 1900 MHz band High channel Downlink:

Input

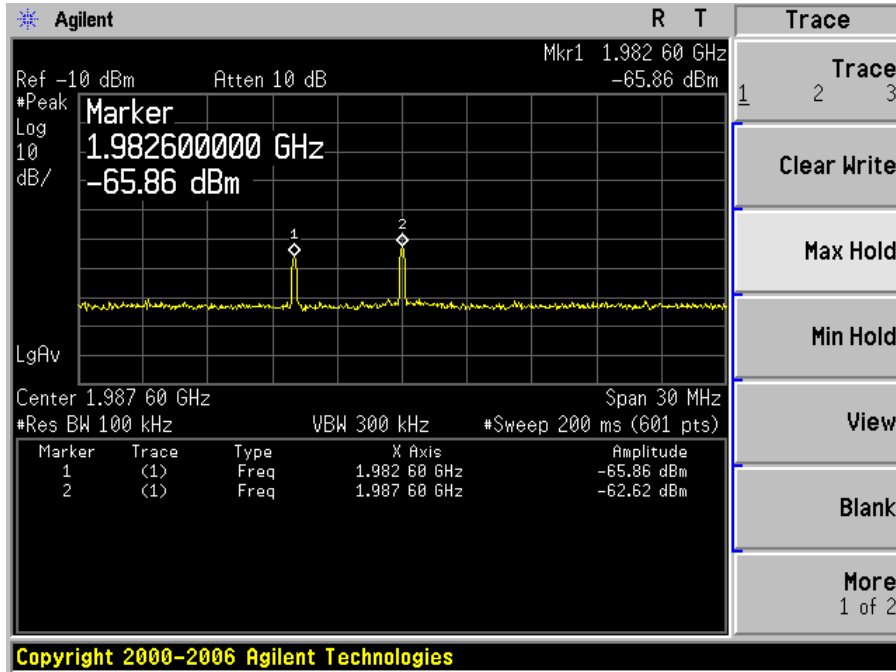


Output

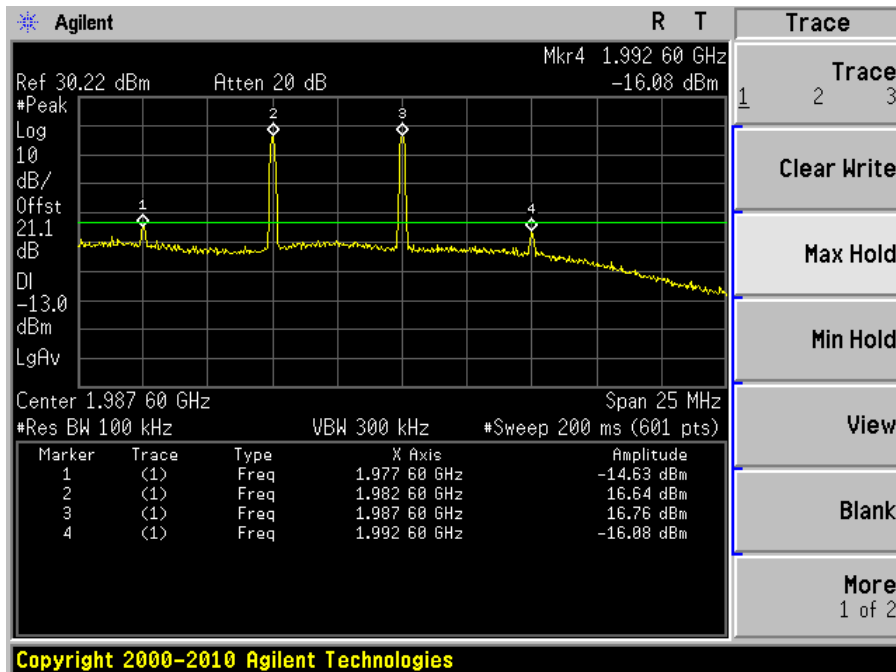


Spurious Emission at antenna terminal:

850 MHz band Uplink: Worst Channel

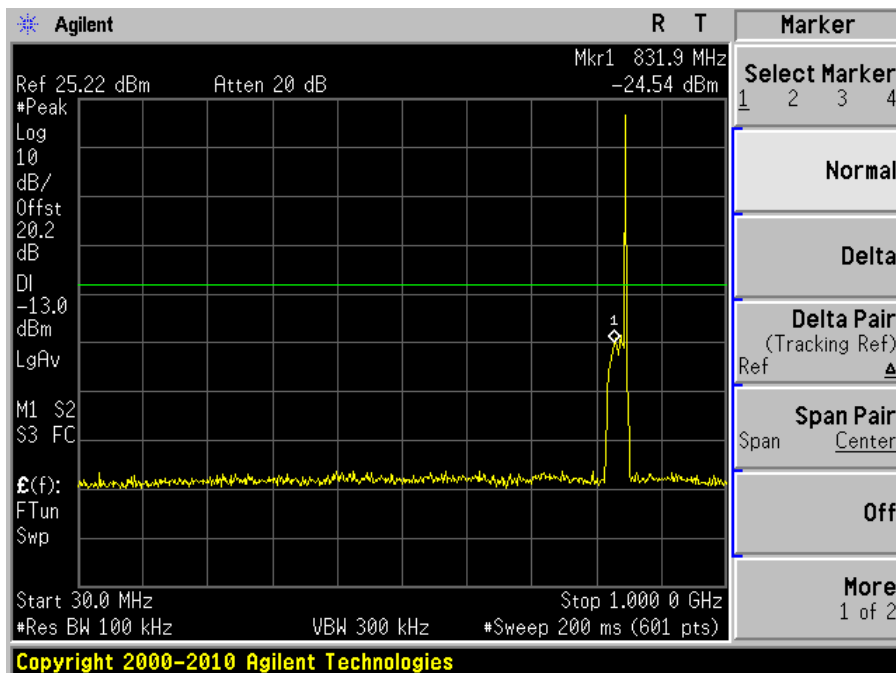


30 MHz to 1 GHz

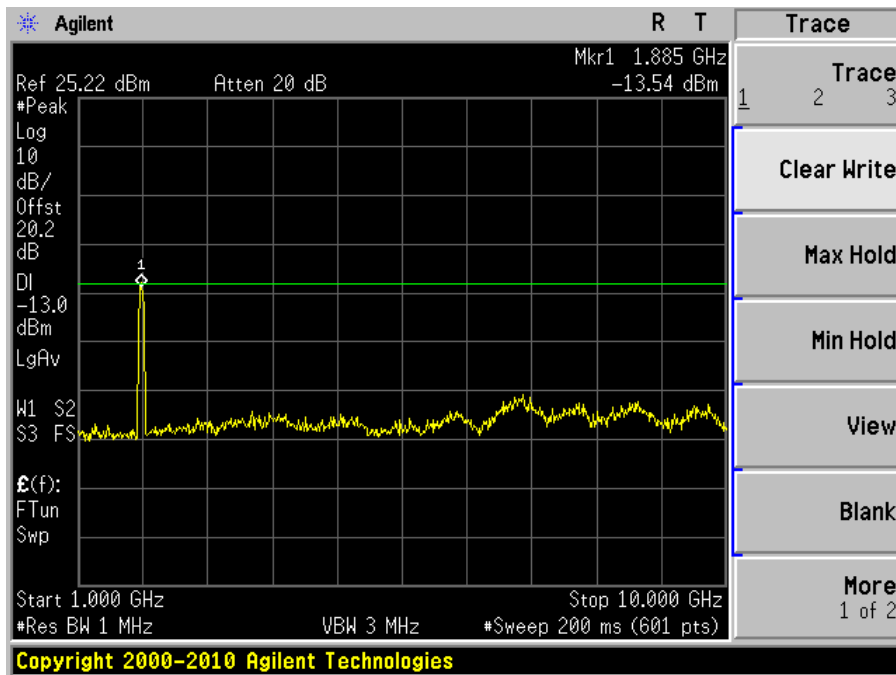


1 GHz to 10 GHz

850 MHz band Downlink: Worst Channel

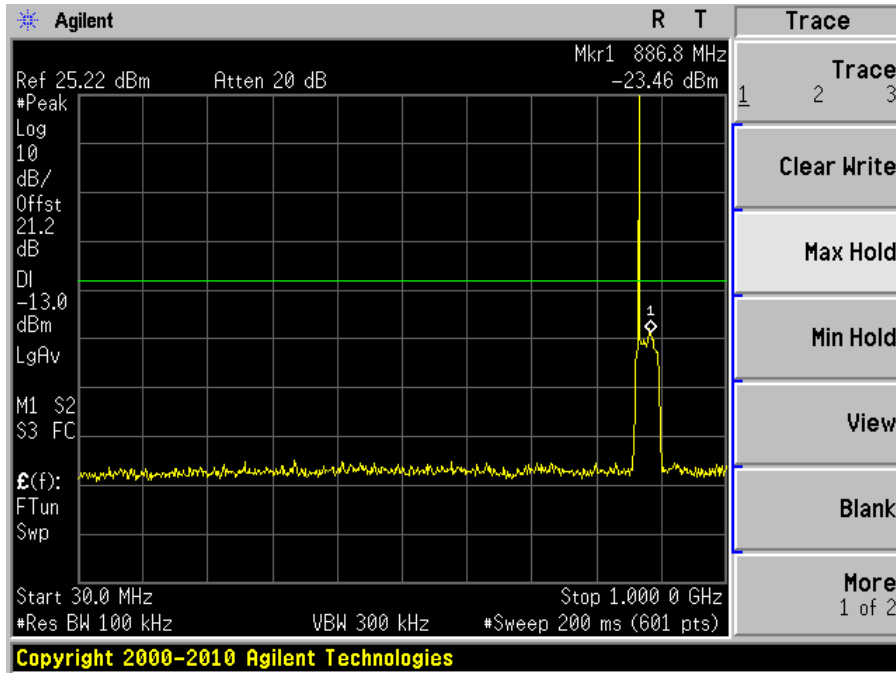


30 MHz to 1 GHz

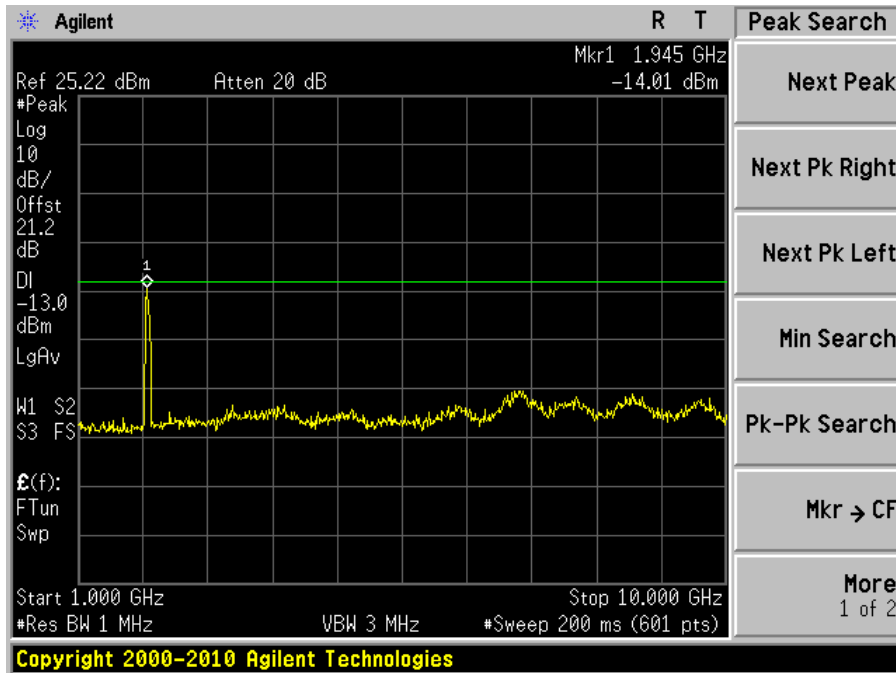


1 GHz to 10 GHz

1900 MHz band Uplink: Worst Channel

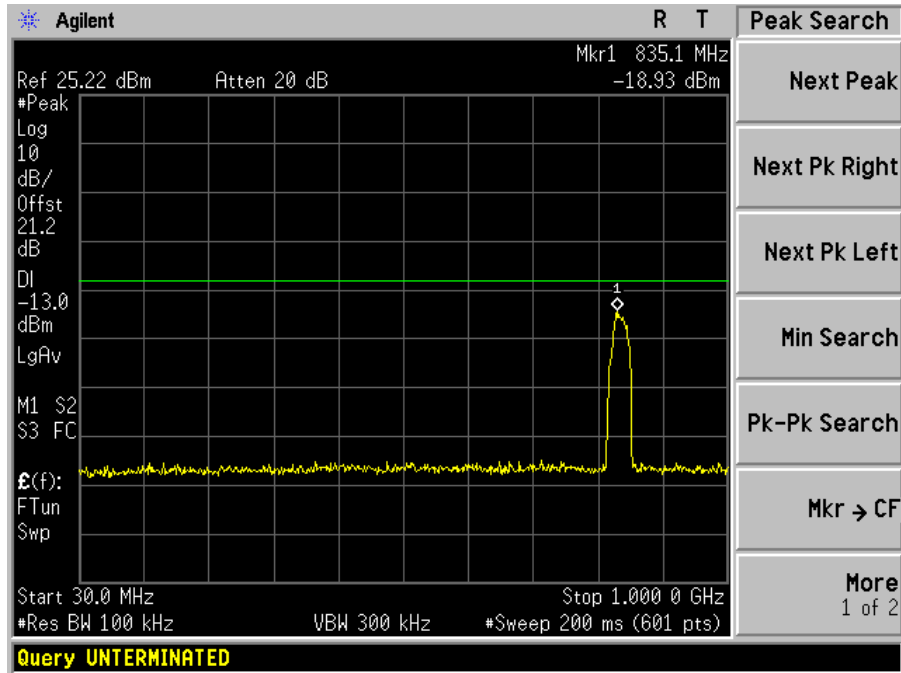


30 MHz to 1 GHz

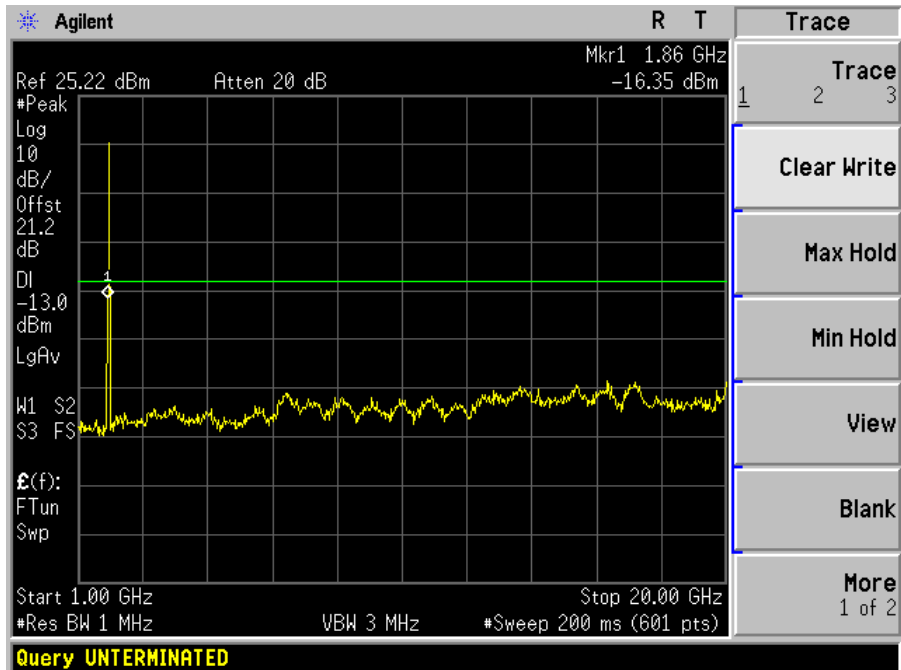


1 GHz to 20 GHz

1900 MHz band Downlink: Worst Channel

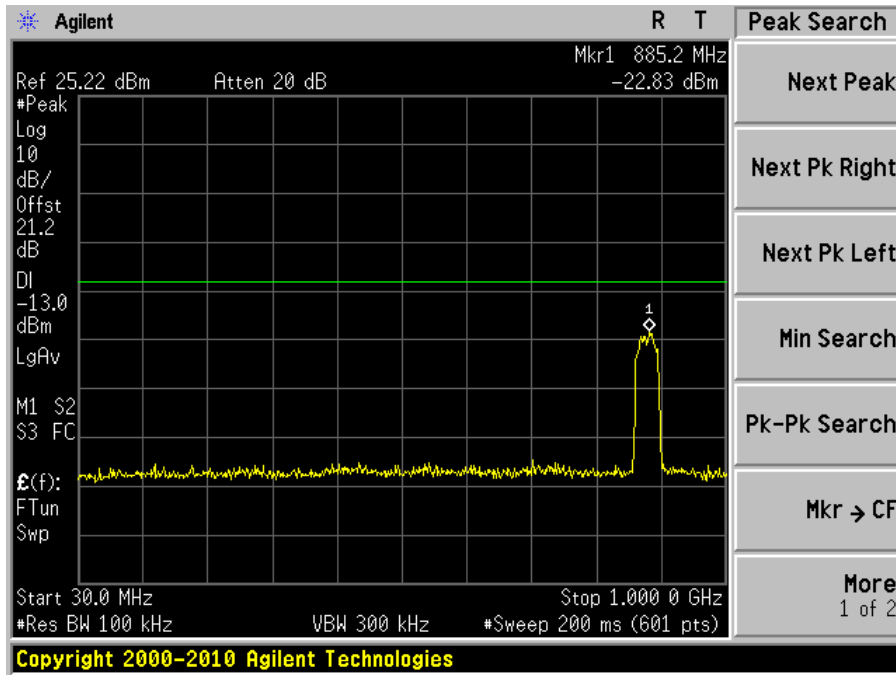

30 MHz to 1 GHz

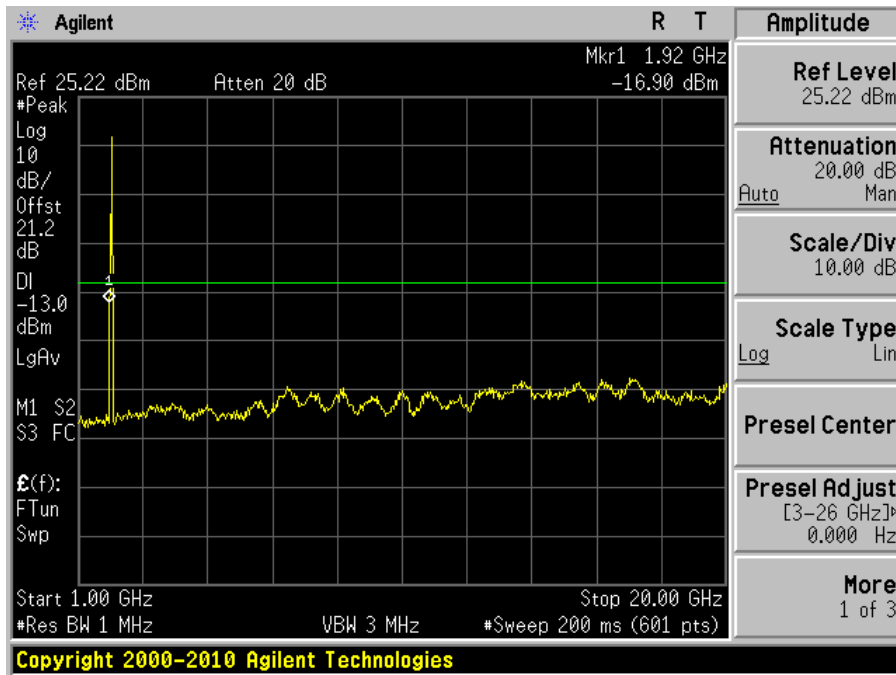

1 GHz to 20 GHz

9 FCC §22.917 & §24.238 – BAND EDGE

9.1 Applicable Standard

According to FCC §22.917, the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to FCC §24.238, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

9.2 Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

9.3 Test Environmental Conditions

Temperature:	20-25 °C
Relative Humidity:	35-40%
ATM Pressure:	101-102 kPa

The testing was performed by Lionel Lara from 2011-08-15 to 2011-08-19 at RF Site.

9.4 Test Equipment List and Details


Manufacturer	Description	Model	Serial Number	Calibration Date
Rohde & Schwarz	Generator, Signal	SMIQ03	849192/0085	2010-03-31
Agilent	Analyzer, Spectrum	E4440A	US45303156	2010-08-09
Agilent	ESG-D Series Signal Generator	E4438C	MY45091309	2011-04-28

Statement of Traceability: *BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.*


9.5 Test Results

Please refer to the following plots.

GSM 850 MHz band Uplink Band Edge

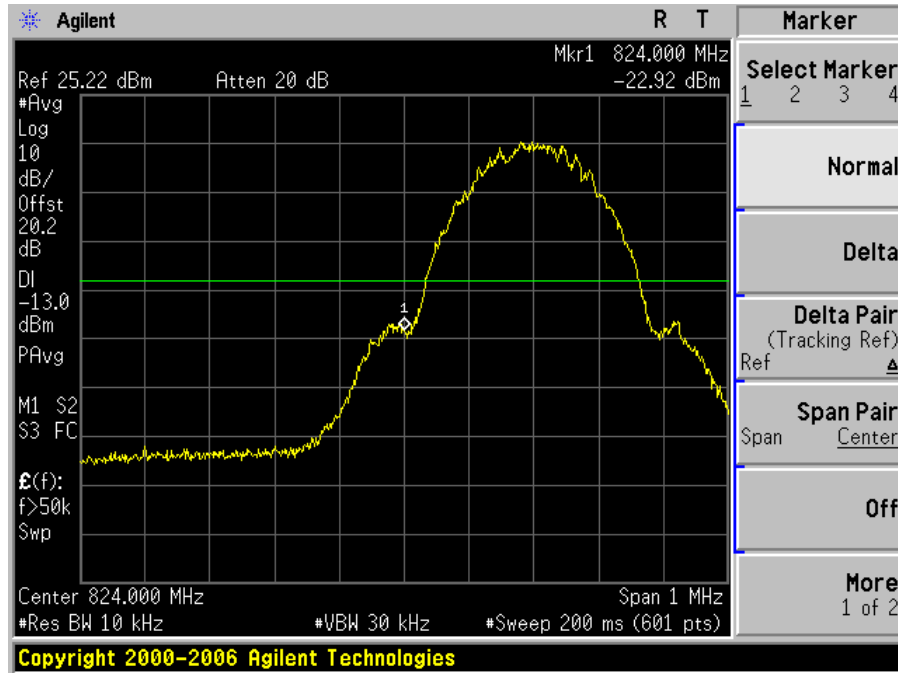


Low Channel

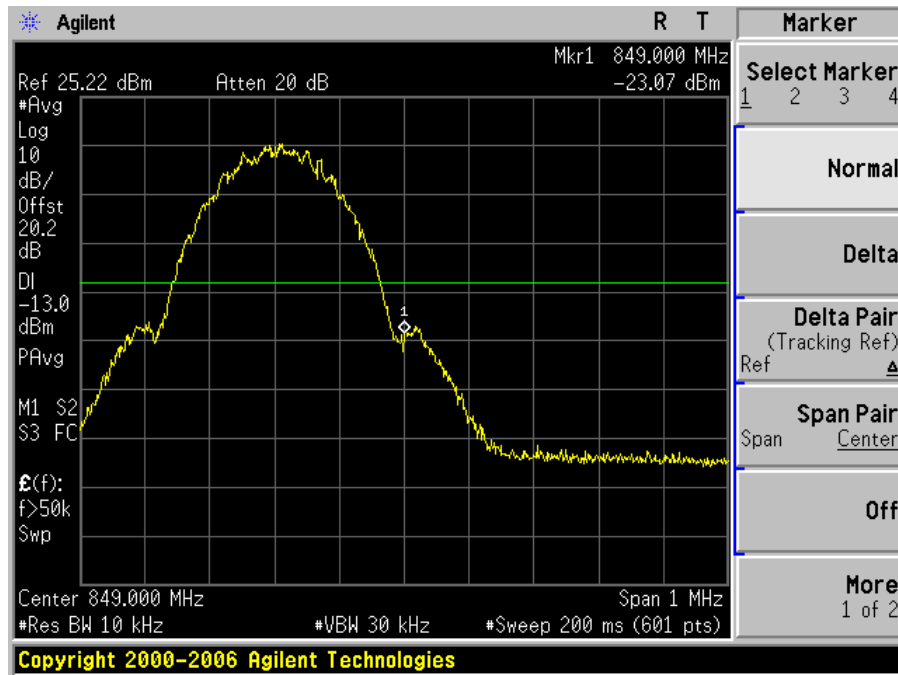


High Channel

GSM 850 MHz band Downlink Band Edge

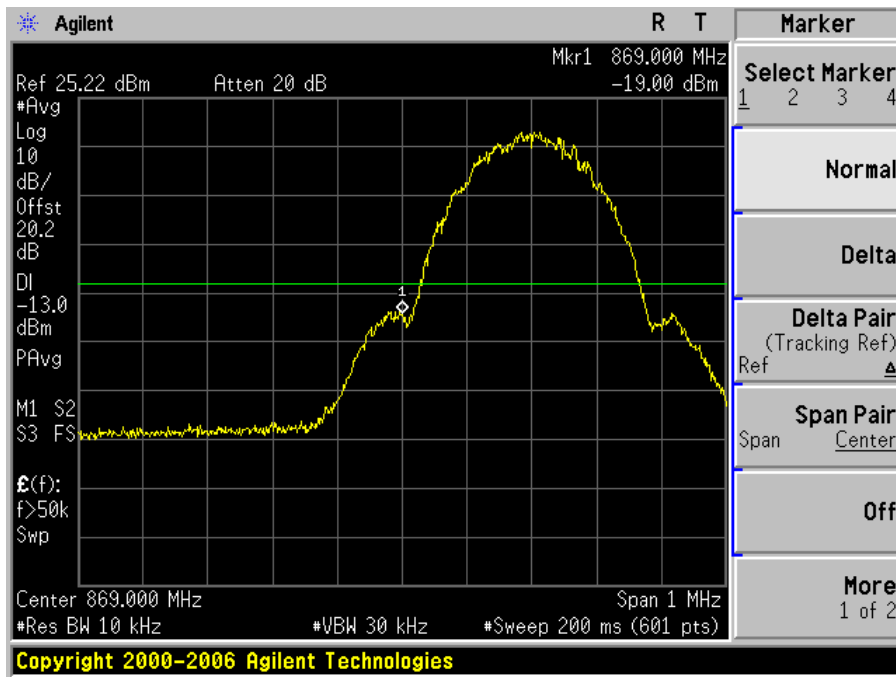


Low Channel

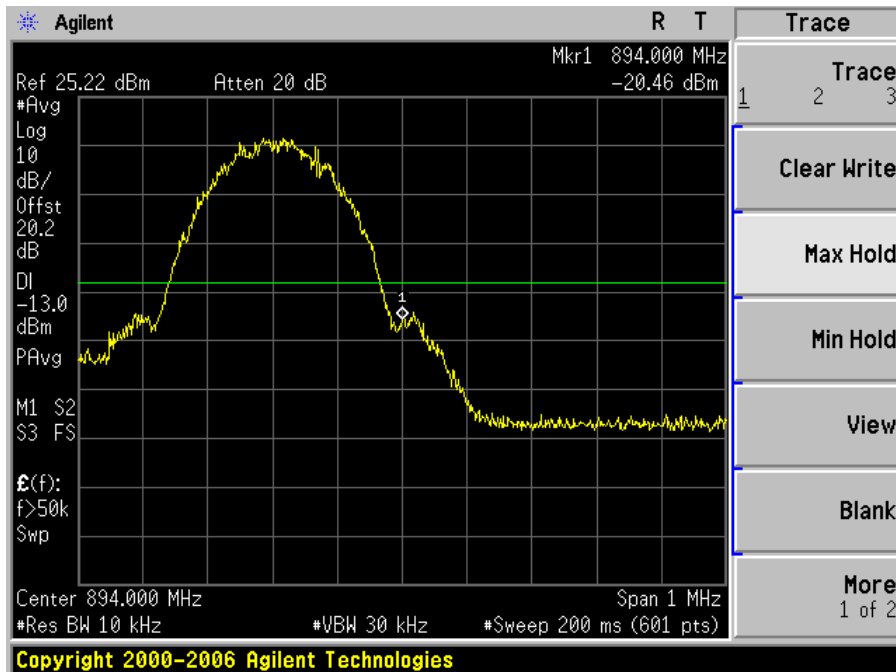


High Channel

GSM 1900 MHz band Uplink Band Edge

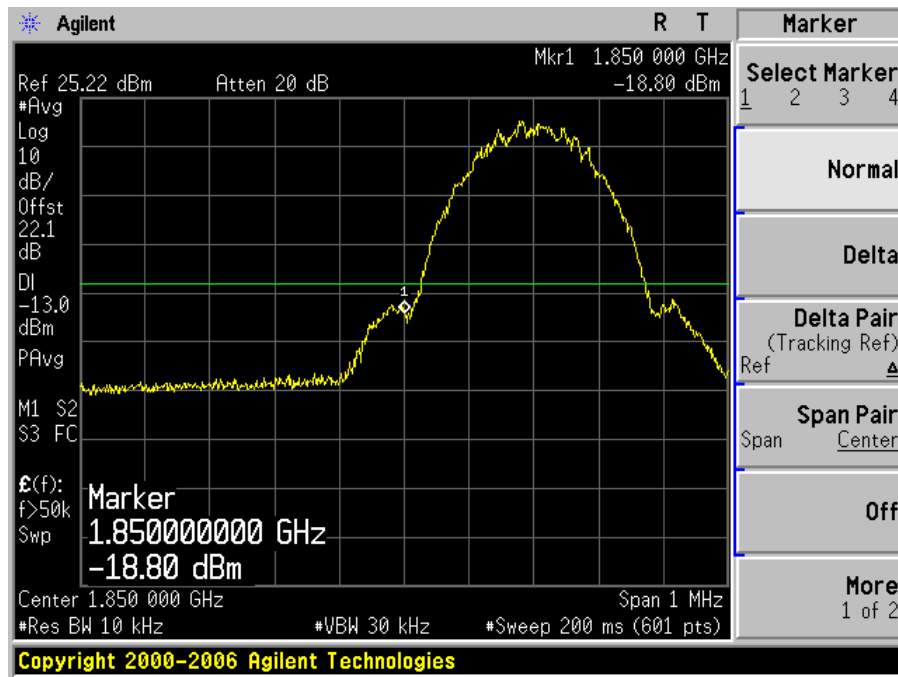


Low Channel

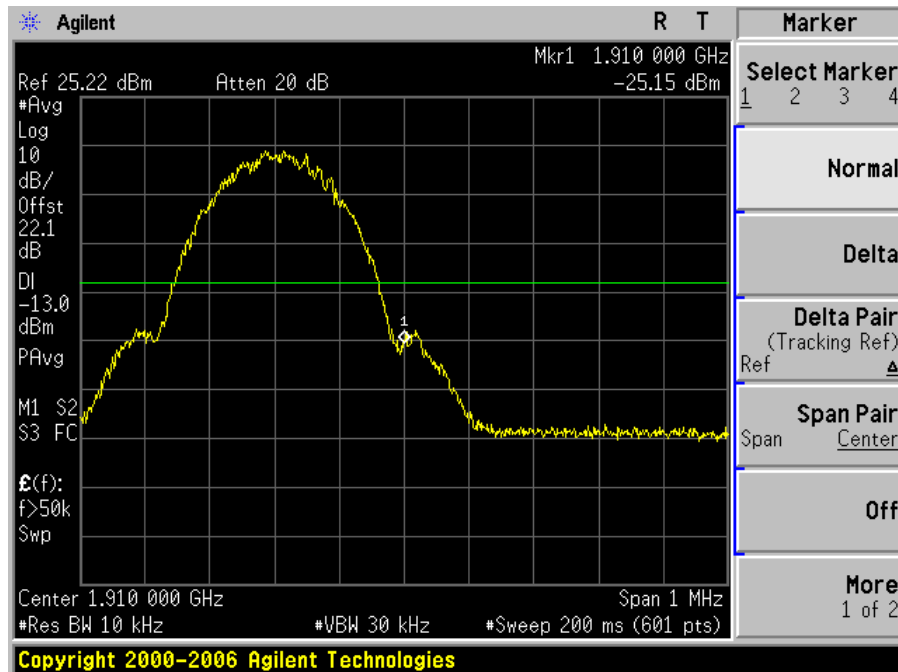


High Channel

GSM 1900 MHz band Downlink Band Edge

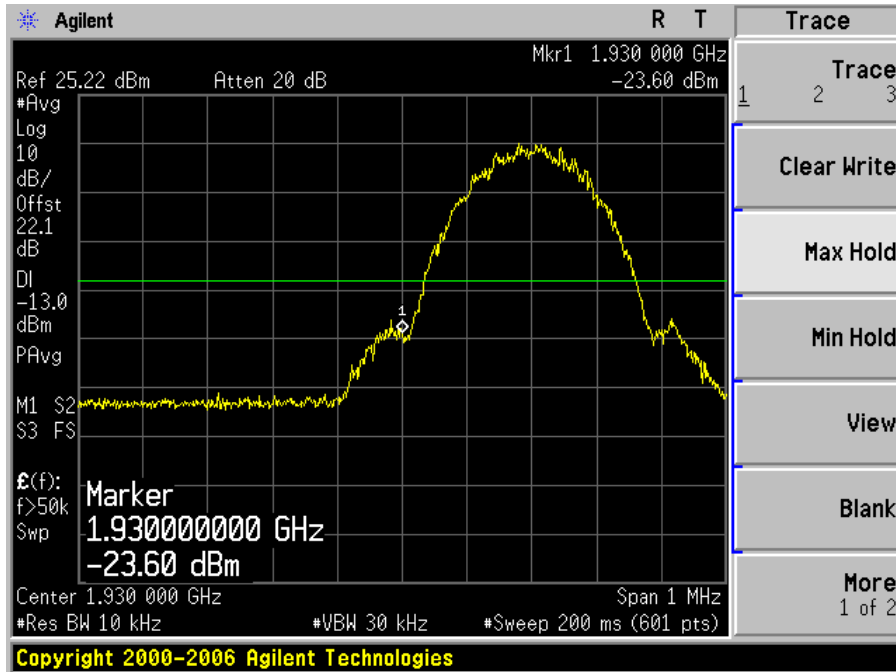


Low Channel

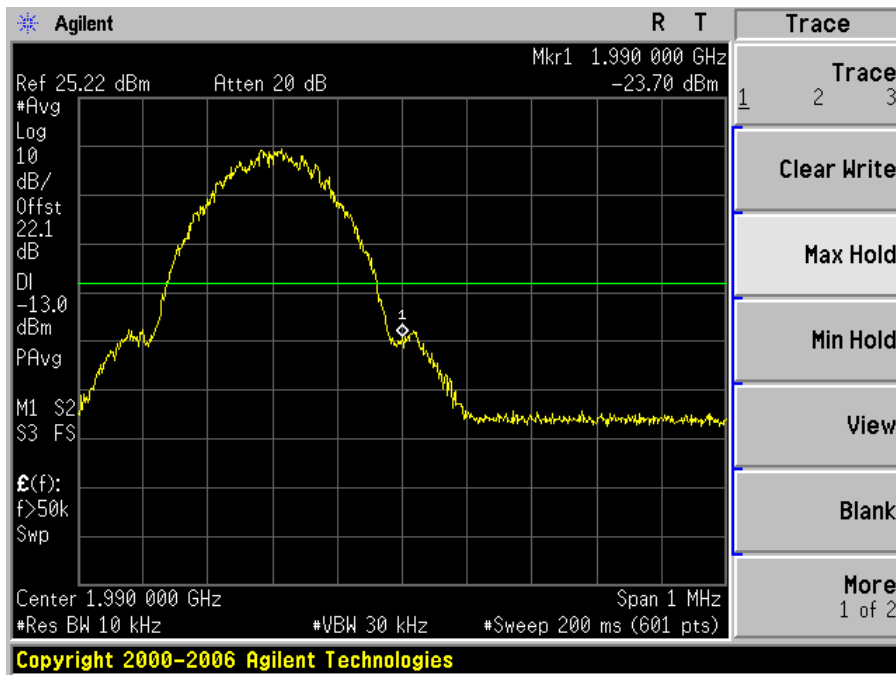


High Channel

EDGE 850 MHz band Uplink Band Edge

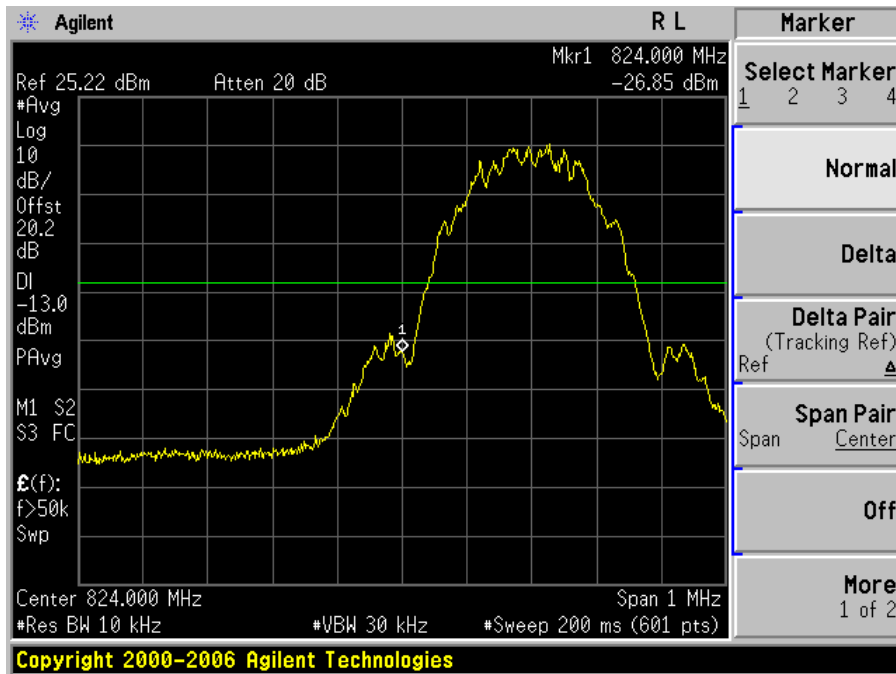


Low Channel

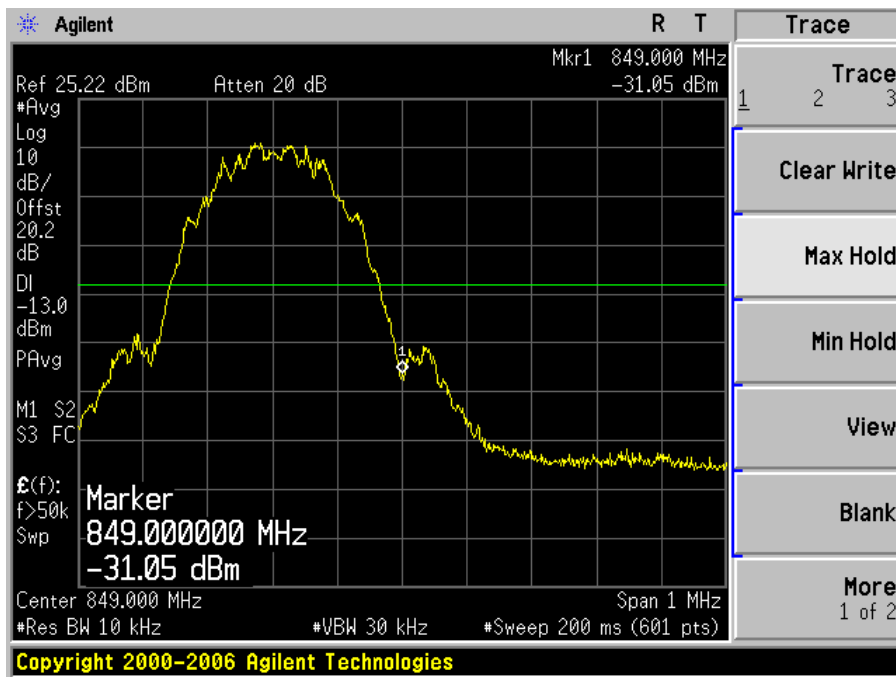


High Channel

EDGE 850 MHz band Downlink Band Edge

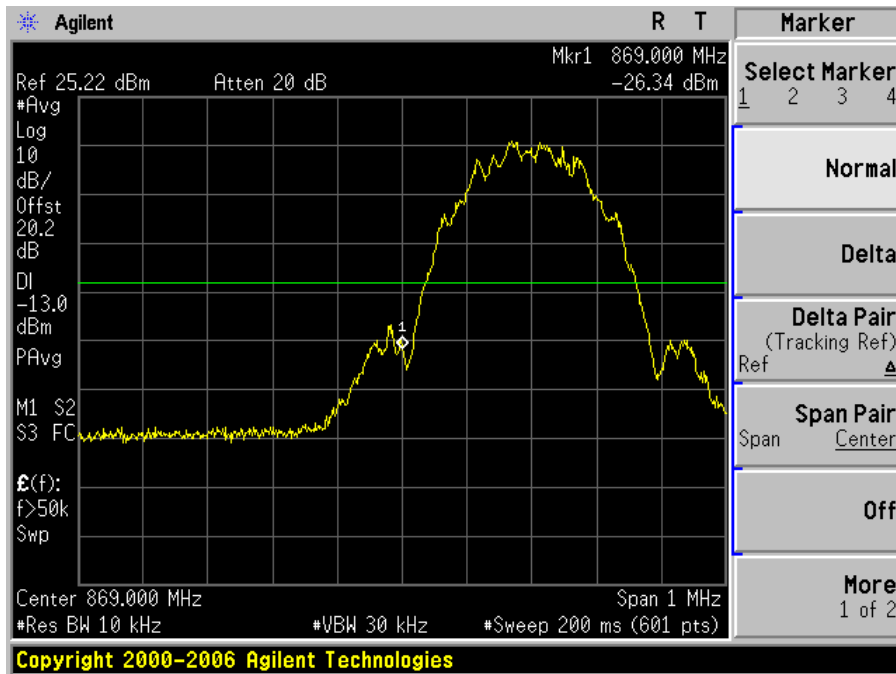


Low Channel

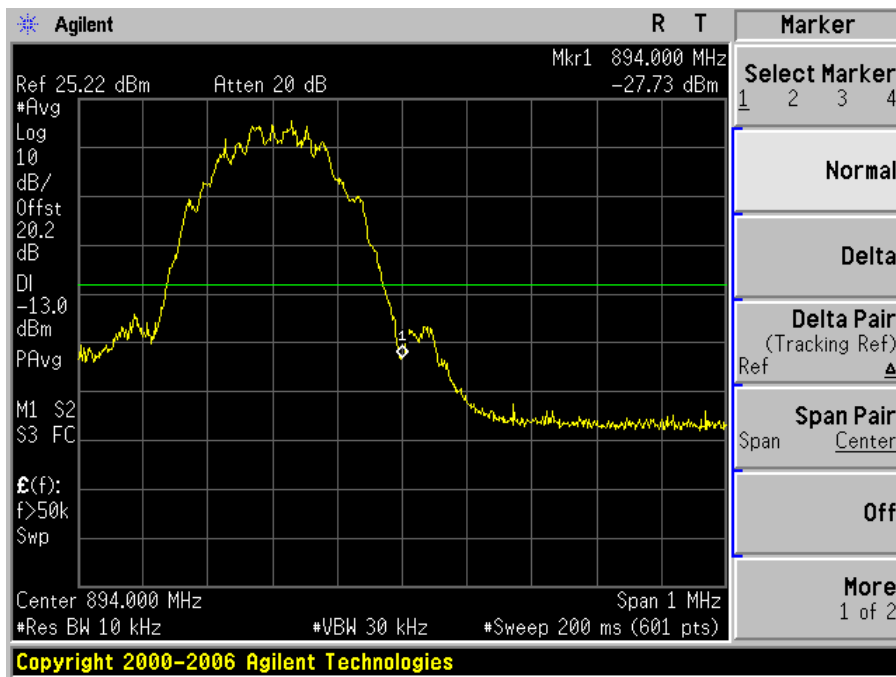


High Channel

EDGE 1900 MHz band Uplink Band Edge

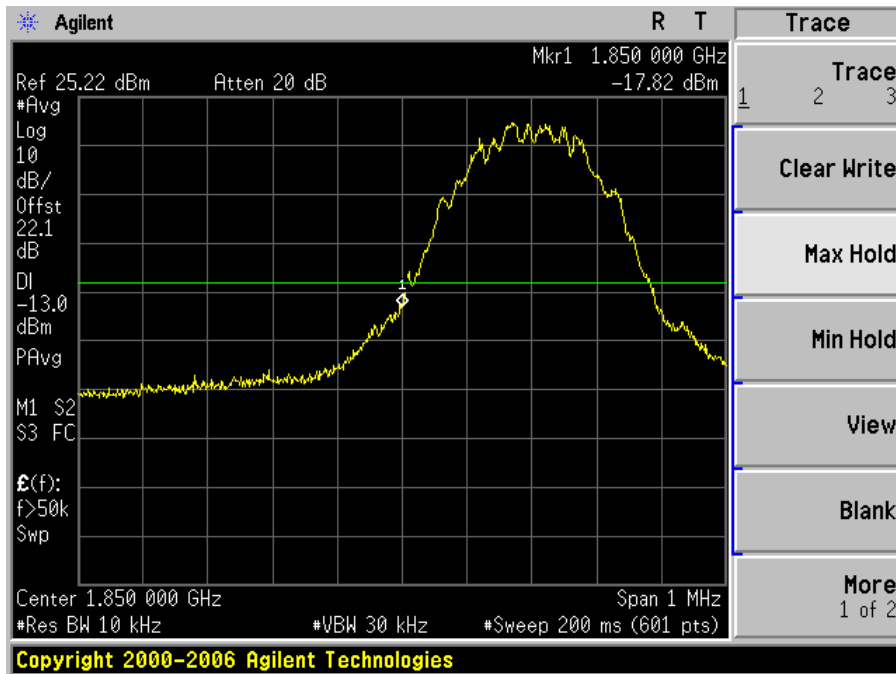


Low Channel

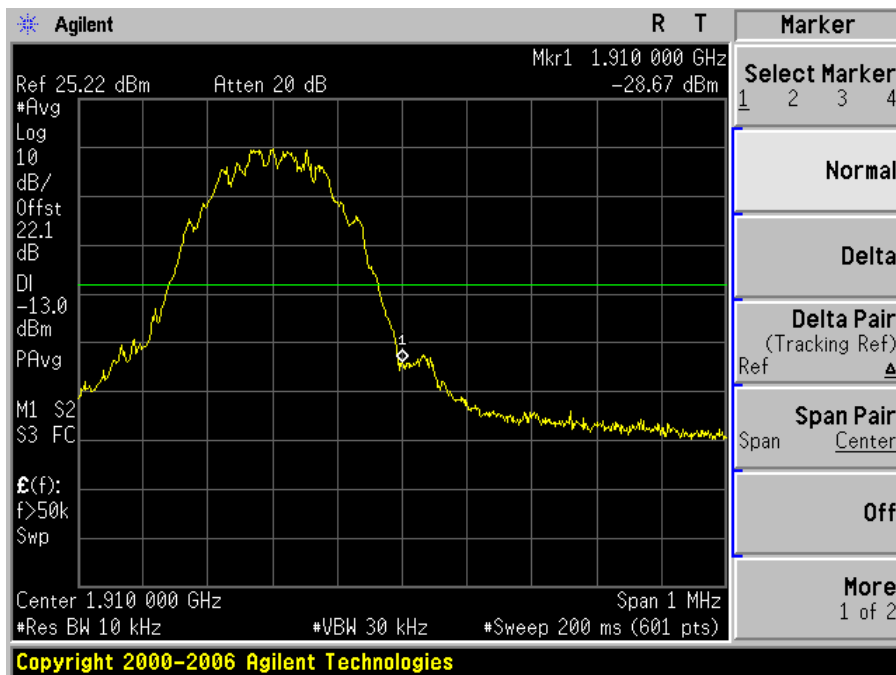


High Channel

EDGE 1900 MHz band Downlink Band Edge

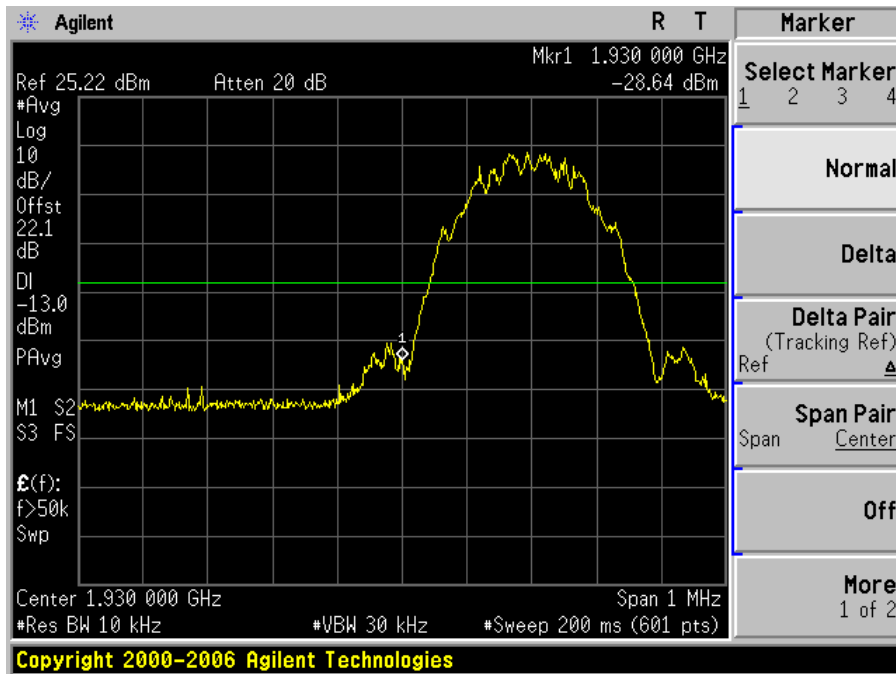


Low Channel

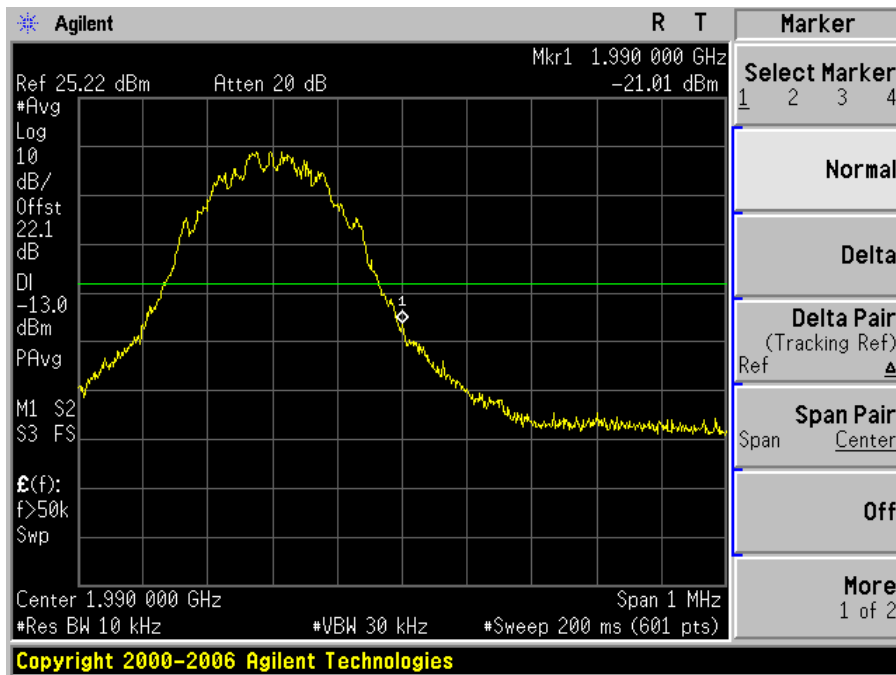


High Channel

CDMA 850 MHz band Uplink Band Edge

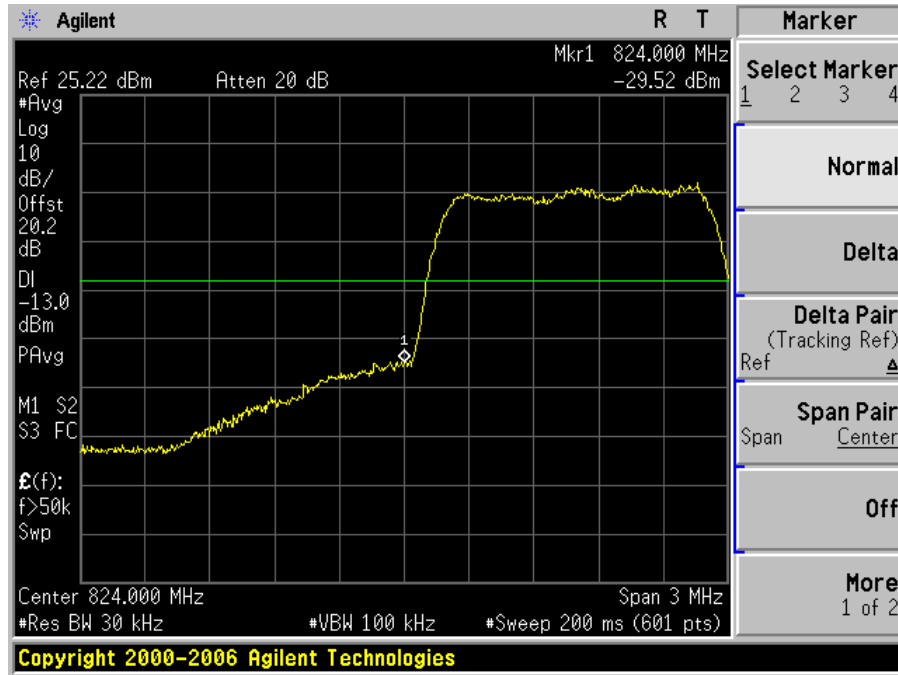


Low Channel

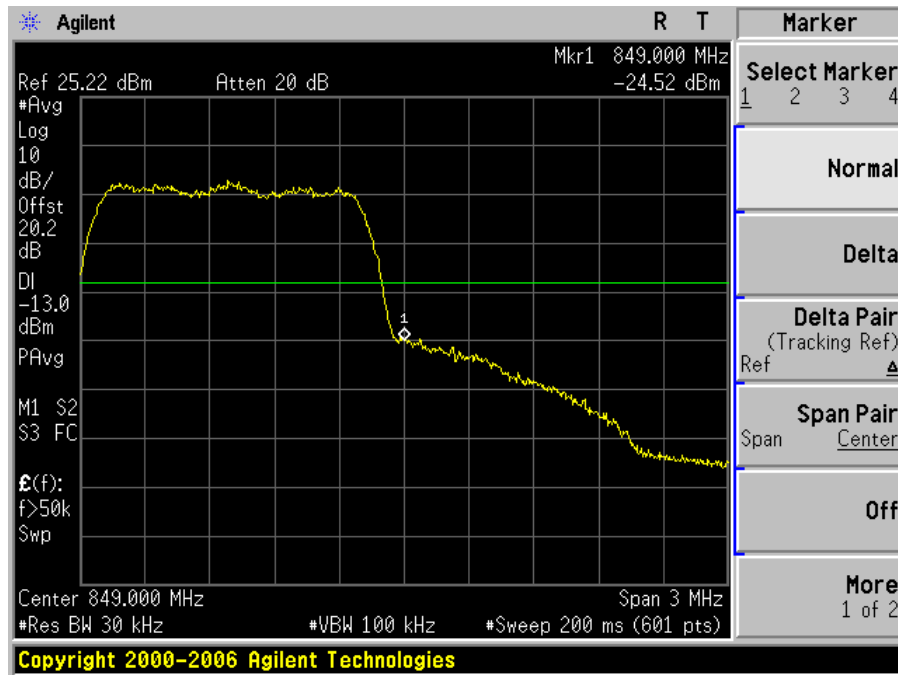


High Channel

CDMA 850 MHz band Downlink Band Edge

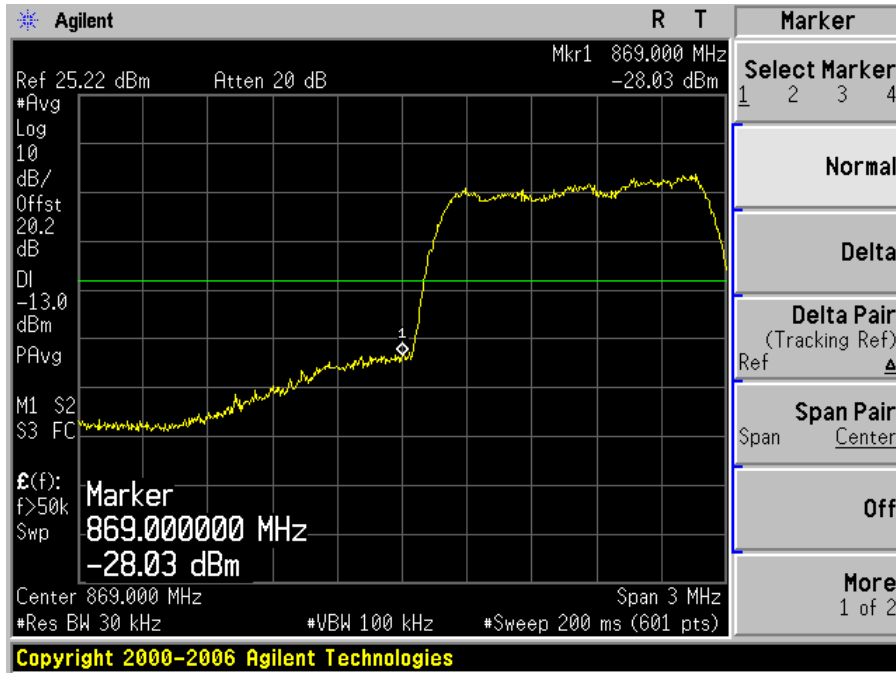


Low Channel

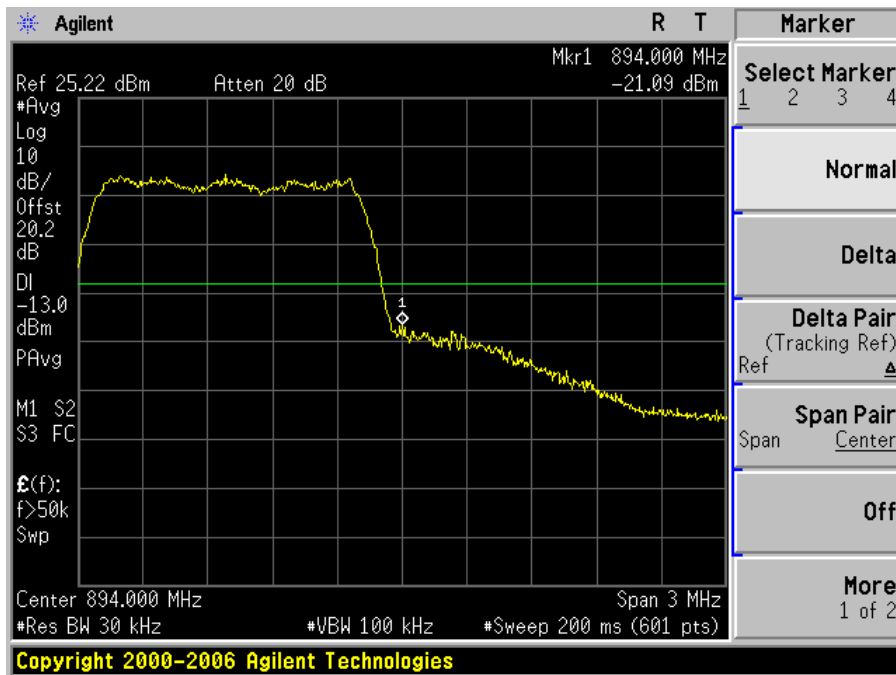

High Channel

CDMA 1900 MHz band Uplink Band Edge

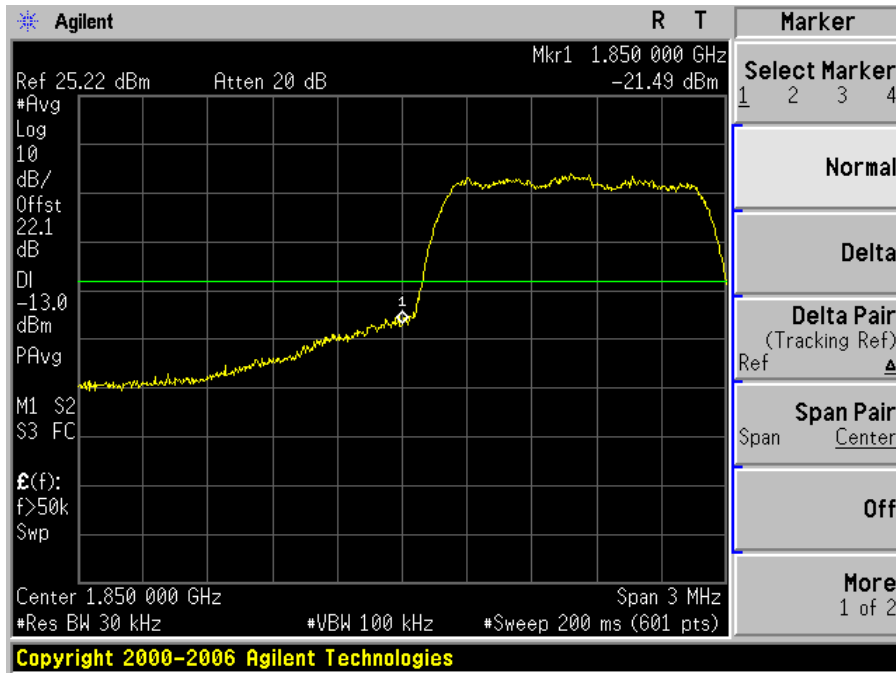


Low Channel




High Channel

CDMA 1900 MHz band Downlink Band Edge

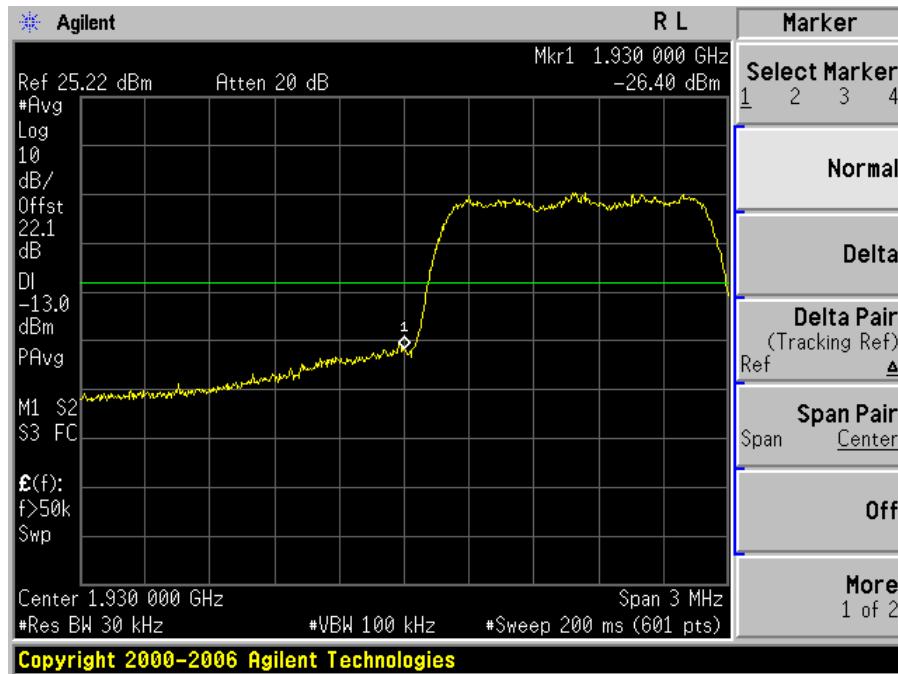


Low Channel

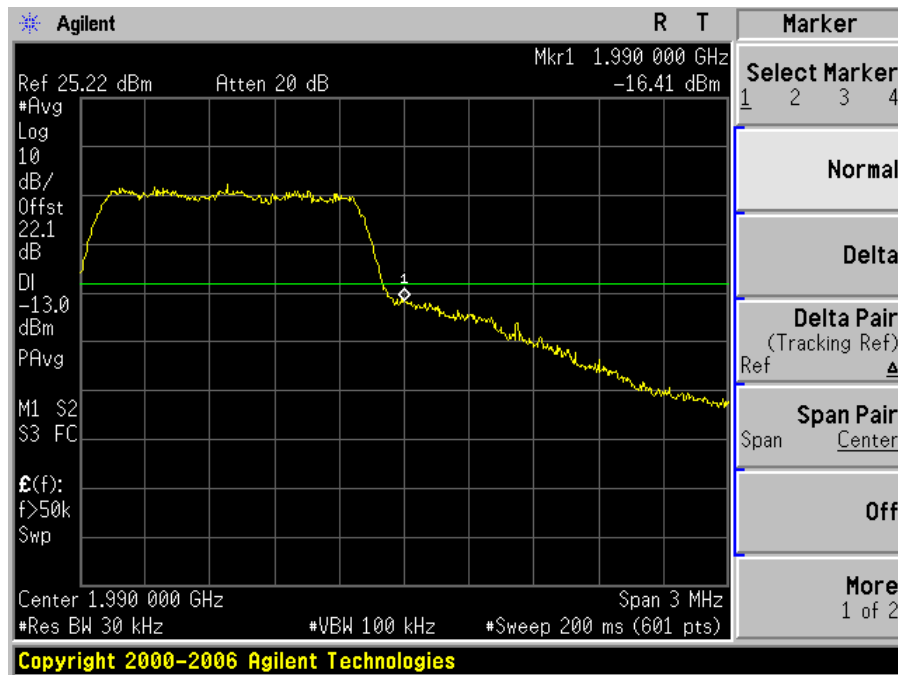


High Channel

WCDMA 850 MHz band Uplink Band Edge

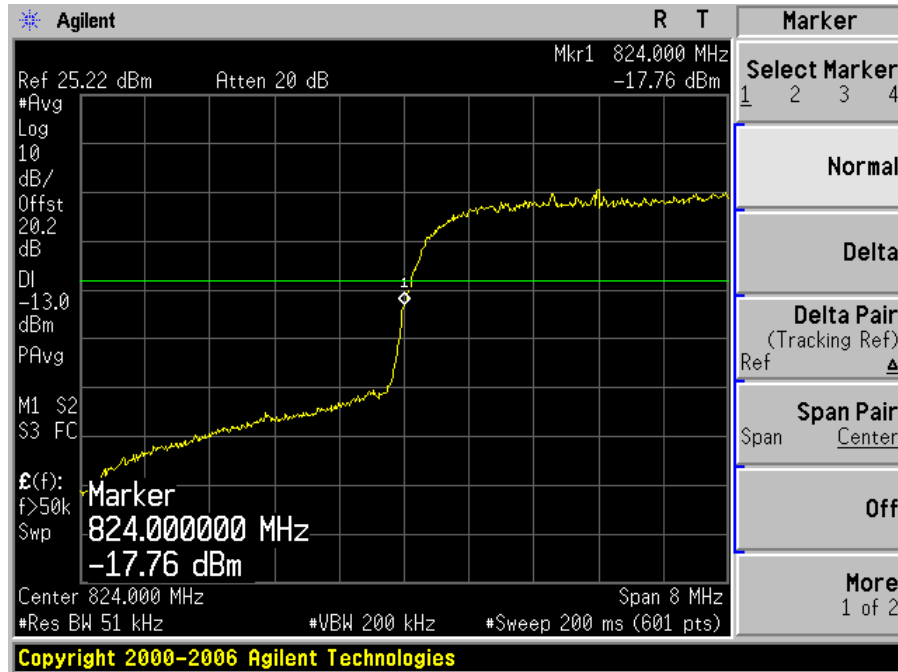


Low Channel

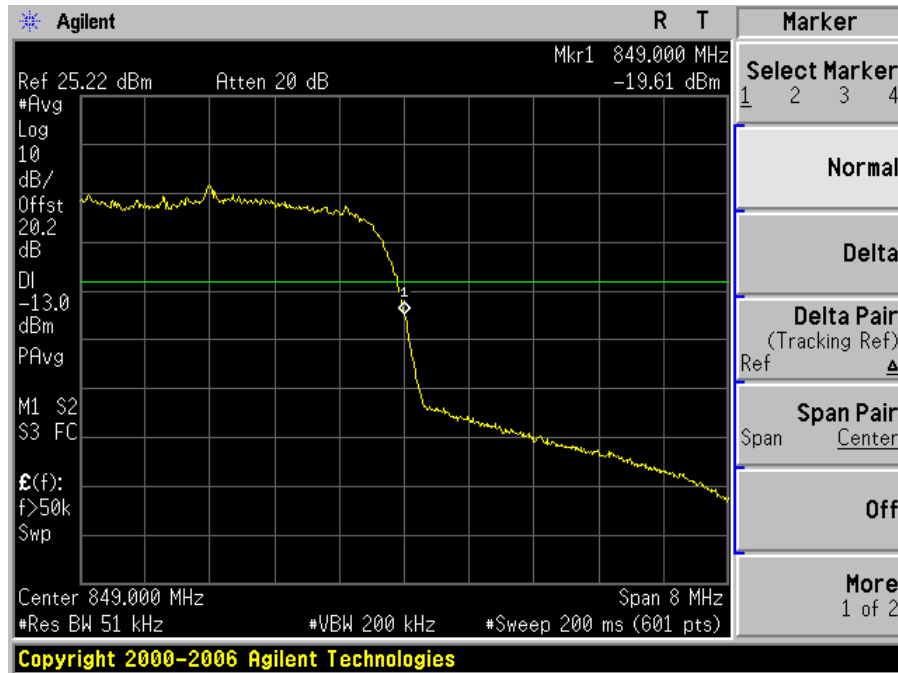


High Channel

WCDMA 850 MHz band Downlink Band Edge

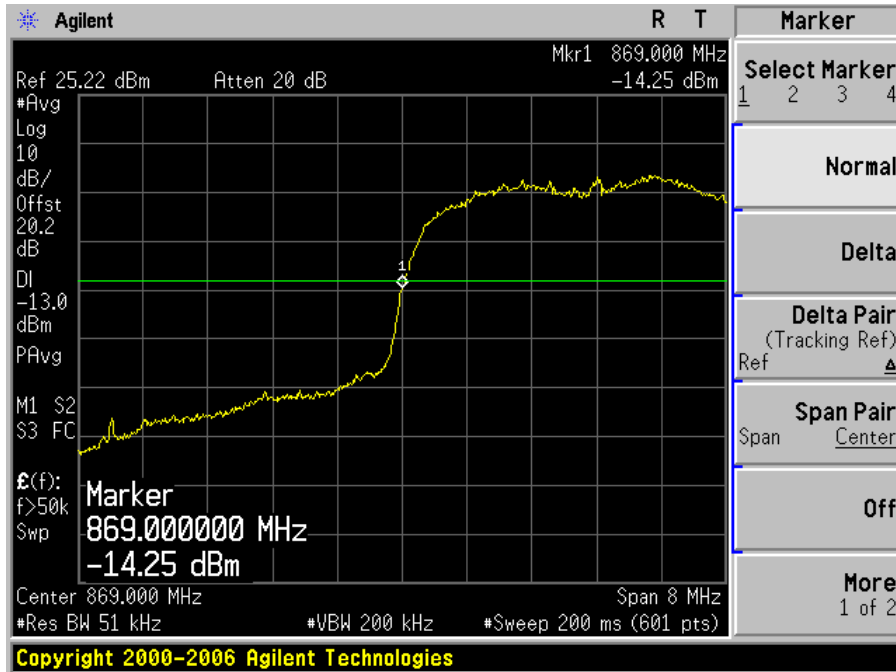


Low Channel

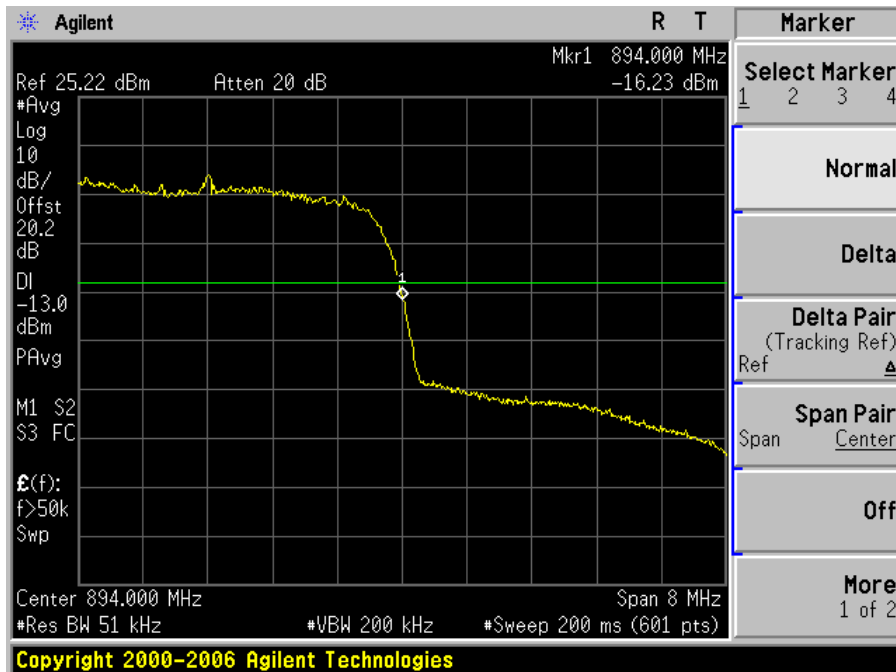


High Channel

WCDMA 1900 MHz band Uplink Band Edge

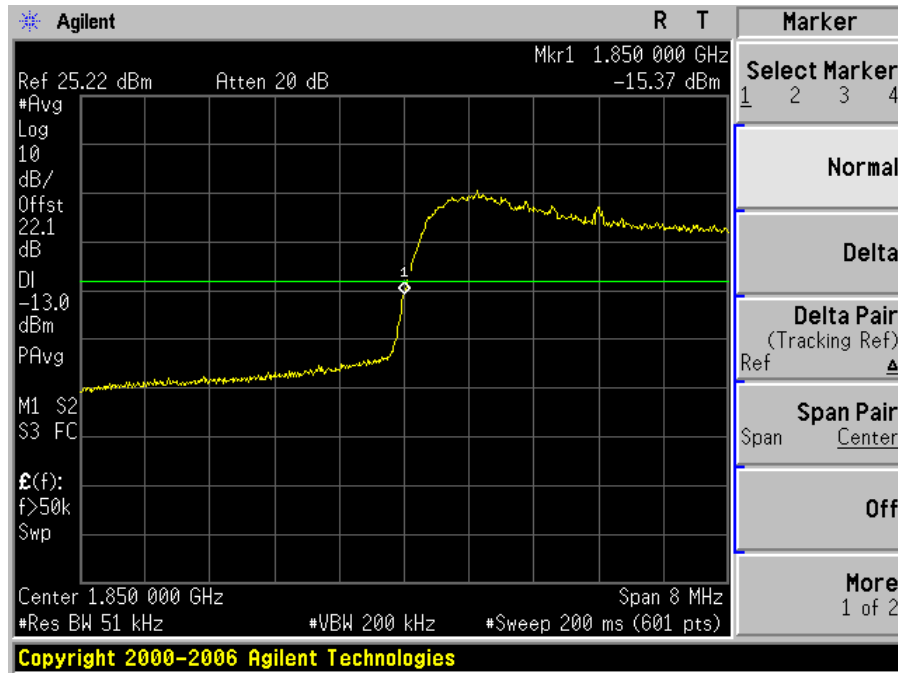


Low Channel

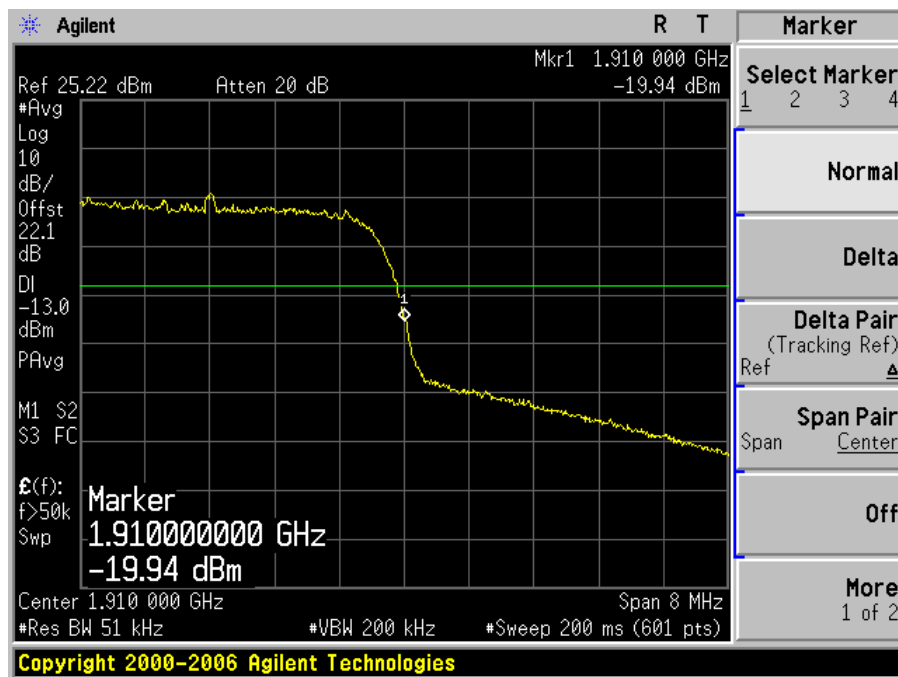


High Channel

WCDMA 1900 MHz band Downlink Band Edge

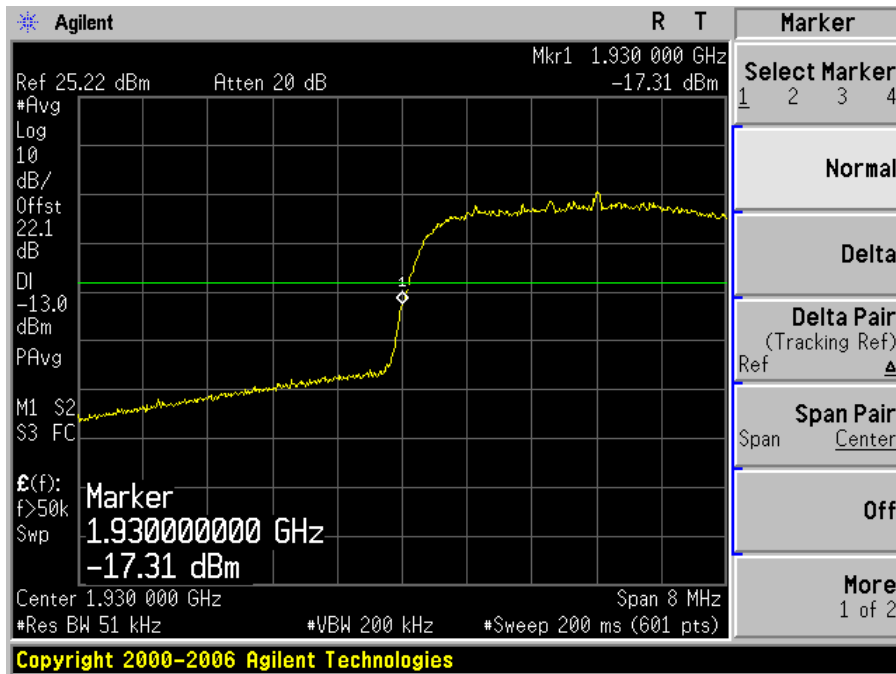

Low Channel

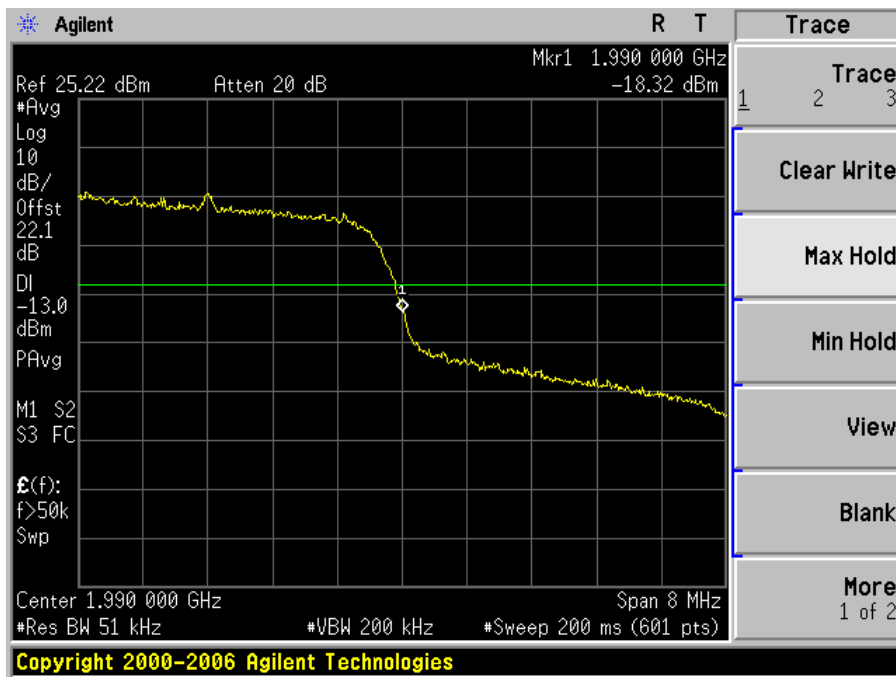

High Channel

10 FCC §2.1055, §22.355 & §24.235 – FREQUENCY STABILITY

This EUT is an amplifier/repeater, not a transmitter. There is no oscillator circuit in the EUT, therefore there is no frequency stability measurement required.

10.1 Test Result

N/A

11 FCC §1.1307(b)(1) & §2.1091 - RF EXPOSURE INFORMATION

11.1 Applicable Standard

According to FCC §1.1310 and §2.1091 (Mobile Devices) RF exposure is calculated.

Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

Note: f = frequency in MHz

* = Plane-wave equivalent power density

11.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

Cellular Band Uplink:

Maximum peak output power at antenna input terminal (dBm): 21.49

Maximum peak output power at antenna input terminal (mW): 140.93

Prediction distance (cm): 25

Prediction frequency (MHz): 836.4

Antenna Gain, typical (dBi): 14

Cable Loss (dB): 3.6

Power density at predication frequency and distance (mW/cm²): 0.197

MPE limit for uncontrolled exposure at predication frequency (mW/cm²): 0.558

Cellular Band Downlink:

Maximum peak output power at antenna input terminal (dBm):	<u>23.22</u>
Maximum peak output power at antenna input terminal (mW):	<u>209.89</u>
Prediction distance (cm):	<u>25</u>
Prediction frequency (MHz):	<u>893.8</u>
Antenna Gain, typical (dBi):	<u>14</u>
Cable Loss (dB):	<u>3.6</u>
Power density at predication frequency and distance (mW/cm ²):	<u>0.293</u>
MPE limit for uncontrolled exposure at predication frequency (mW/cm ²):	<u>0.596</u>

PCS Band Uplink:

Maximum peak output power at antenna input terminal (dBm):	<u>24.39</u>
Maximum peak output power at antenna input terminal (mW):	<u>274.79</u>
Prediction distance (cm):	<u>25</u>
Prediction frequency (MHz):	<u>1880</u>
Antenna Gain, typical (dBi):	<u>14</u>
Cable Loss (dB):	<u>5.0</u>
Power density at predication frequency and distance (mW/cm ²):	<u>0.278</u>
MPE limit for uncontrolled exposure at predication frequency (mW/cm ²):	<u>1.0</u>

PCS Band Downlink:

Maximum peak output power at antenna input terminal (dBm):	<u>23.65</u>
Maximum peak output power at antenna input terminal (mW):	<u>231.74</u>
Prediction distance (cm):	<u>25</u>
Prediction frequency (MHz):	<u>1960</u>
Antenna Gain, typical (dBi):	<u>14</u>
Cable Loss (dB):	<u>5.0</u>
Power density at predication frequency and distance (mW/cm ²):	<u>0.234</u>
MPE limit for uncontrolled exposure at predication frequency (mW/cm ²):	<u>1.0</u>

Note: To meet 33 dBm (2 watts) EIRP limit in PCS band, the gain of antenna used with this booster must be offset by coaxial cable loss such that the antenna gain less cable loss does not exceed 9 dBi.

Results

For Uplink, the highest power density level at 25 cm is below the uncontrolled exposure limit. For Downlink; the highest power density level at 25 cm is below the uncontrolled exposure limit.