

# Cellphone-Mate, Inc.

## TEST REPORT FOR

**5 Band Mobile Booster  
Model: Fusion2Go-Max**

**Tested to The Following Standard:**

**FCC Part 20.21 / 22H / 24E / 27**

**Report No.: 102180-12**

**Date of issue: February 28, 2019**



Test Certificate # 803.06

This test report bears the accreditation symbol indicating that the testing performed herein meets the test and reporting requirements of ISO/IEC 17025 under the applicable scope of testing for CKC Laboratories, Inc.

We strive to create long-term, trust based relationships by providing sound, adaptive, customer first testing services. We embrace each of our customers' unique EMC challenges, not as an interruption to set processes, but rather as the reason we are in business.

## TABLE OF CONTENTS

Administrative Information .....	4
Test Report Information .....	4
Report Authorization .....	4
Test Facility Information .....	5
Software Versions.....	5
Site Registration & Accreditation Information .....	5
Summary of Results .....	6
Modifications During Testing.....	8
Conditions During Testing .....	8
Equipment Under Test.....	8
General Product Information .....	9
FCC Part 20.21/22H/24E/27 .....	10
General Test Setup .....	10
7.1 Authorized Frequency Band Verification.....	11
Summary of Results .....	11
7.2 Maximum Power / 7.3 Maximum Booster Gain .....	17
Summary of Results .....	18
7.4 Intermodulation Product.....	41
Summary of Results .....	42
7.5 Out of Band Emissions .....	48
Summary of Results .....	49
7.6 Conducted Spurious Emissions .....	81
Summary of Results .....	82
7.7 Noise limit.....	107
Summary of Results .....	108
7.7.1 Maximum Transmitter Noise Power Level .....	112
7.7.2 Variable UL Noise Timing.....	117
7.8 Uplink Inactivity .....	120
Summary of Results .....	121

7.9 Booster Gain Limit .....	125
Summary of Results .....	126
7.9.1 Maximum Gain .....	126
7.9.2 Variable uplink Gain Timing .....	129
7.10 Occupied Band Width .....	133
Summary of Results .....	134
7.11 Oscillation Detection .....	185
Summary of Results .....	187
7.12 Radiated Spurious Emissions .....	204
Summary of Results .....	205
Exhibit A: Test Setup Photos .....	208
Supplemental Information .....	213
Measurement Uncertainty .....	213
Emissions Test Details .....	213

## ADMINISTRATIVE INFORMATION

### Test Report Information

**REPORT PREPARED FOR:**

Cellphone-Mate, Inc.  
48346 Milmont Drive  
Fremont CA 94538

Representative: Dennis Findley  
Customer Reference Number: CKC01112019

**DATE OF EQUIPMENT RECEIPT:**

**DATE(S) OF TESTING:**

**REPORT PREPARED BY:**

Terri Rayle  
CKC Laboratories, Inc.  
5046 Sierra Pines Drive  
Mariposa, CA 95338

Project Number: 102180

January 14, 2019

January 14-29, 2019

### Report Authorization

The test data contained in this report documents the observed testing parameters pertaining to and are relevant for only the equipment provided by the client, tested in the agreed upon operational mode(s) and configuration(s) as identified herein. Compliance assessment remains the client's responsibility. This report may not be used to claim product endorsement by A2LA or any government agencies. This test report has been authorized for release under quality control from CKC Laboratories, Inc.



**Steve Behm**  
*Director of Quality Assurance & Engineering Services*  
*CKC Laboratories, Inc.*

## Test Facility Information



Our laboratories are configured to effectively test a wide variety of product types. CKC utilizes first class test equipment, anechoic chambers, data acquisition and information services to create accurate, repeatable and affordable test results.

TEST LOCATION(S):  
CKC Laboratories, Inc.  
1120 Fulton Place  
Fremont, CA 94539

## Software Versions

CKC Laboratories Proprietary Software	Version
EMITest Emissions	5.03.11
EMITest Immunity	5.03.10

## Site Registration & Accreditation Information

Location	NIST CB #	TAIWAN	CANADA	FCC	JAPAN
Fremont, CA	US0082	SL2-IN-E-1148R	3082B-1	US1023	A-0149

## SUMMARY OF RESULTS

**Standard / Specification: FCC Part 20.21/22H/24E/27**

**Wideband Consumer Signal Booster Measurement Guidance: KDB #935210 DO3 v04r02, June 19, 2018**

Correlation Matrix & Results					
Guidance Section	Guidance Description	FCC Section	FCC Rule Description	Mods	Results
7.1 a) - k)	Authorized Frequency Band Verification Test	20.21(e)(3)	Frequency Bands	NA	Pass
7.2.2 a) - k)	Maximum Power Measurement Procedure	2.1046/20.21(e)(8)(i)(D)	Power Limit	Mod. #1	Pass
7.3 a) - d)	Maximum Booster Gain Computation	20.21(e)(8)(i)(B)	Bidirectional Capabilities	Mod. #1	Pass
7.4 a) - n)	Intermodulation Product	20.21(e)(8)(i)(F)	Intermodulation Limit	Mod. #1	Pass
7.5 a) - n)	Out of Band Emissions	20.21(e)(8)(i)(E)	Out of Band Emission	Mod. #1	Pass
7.6 a) - e)	Conducted Spurious Emission	2.1051/22H/24E/27	Spurious emission	NA	Pass
7.7.1 a) - g) 7.7.1 h) - n) 7.7.2 a) - g)	Noise Limit Procedure Variable Noise Variable Noise Timing	20.21(e)(8)(i)(A)(2)(i) 20.21(e)(8)(i)(A)(1) 20.21(e)(8)(i)(H)	Noise Limits  Transmit Power Off Mode	Mod. #1	Pass
7.8 a) - l)	Uplink inactivity	20.21(e)(8)(i)(I)	Uplink Inactivity	NA	Pass

NA = Not applicable

NA1 = Not applicable because

**Standard / Specification: FCC Part 20.21/22H/24E/27 - continued**

Correlation Matrix & Results					
Guidance Section	Guidance Description	FCC Section	FCC Rule Description	Mods	Results
7.9.1 a) - l)	Variable Booster Gain	20.21(e)(8)(i)(C) (1), (2)(i)	Booster Gain	Mod. #1	Pass
7.9.2 a) - f)	Variable Uplink Gain Timing	20.21(e)(8)(i)(H)	Transmit Power Off Mode		
7.10.a) - j)	Occupied Band Width	2.1049/22H/24E/27	Occupied Band Width	NA	Pass
7.11.2 a) - r) 7.11.3 a) - h) 7.11.4 a) - h) (alternate to 7.11.3)	Anti-Oscillation	20.21(e)(8)(ii)(A)	Anti-Oscillation	Mod. #1	Pass
7.12a) - f)	Radiated Spurious Emission	2.1053/ 22H/24E/27	Spurious Emission	Mod. #1	Pass
7.13 a) - c)	Spectrum Block Filter	NA	NA	NA	NA1
7.14	Additional requirements for dual-enclosure wideband consumer signal boosters	NA	NA	NA	NA2

NA = Not applicable

NA1 = Not applicable because the EUT does not employ spectrum block filter.

NA2 = Not applicable because the EUT is not dual-enclosure wideband consumer signal booster.

ISO/IEC 17025 Decision Rule
The declaration of pass or fail herein is based upon assessment to the specification(s) listed above, including where applicable, assessment of measurement uncertainties. For performance related tests, equipment was monitored for specified criteria identified in that section of testing.

## Modifications During Testing

This list is a summary of the modifications made to the equipment during testing.

Summary of Conditions
<b>Modification #1:</b> <ul style="list-style-type: none"> <li>a. Increased the 850 UL output power by 1dB</li> <li>b. Increased the AWS UL gain by 1dB</li> <li>c. Increased the PCS UL gain by 1dB</li> <li>d. Increased the LTE-V UL gain by 1dB</li> <li>e. Increased the 850 DL gain by 1dB</li> <li>f. Decreased the AWS DL gain by 1dB</li> <li>g. Decreased the AWS DL gain by 1dB</li> </ul>

**Modifications listed above must be incorporated into all production units.**

## Conditions During Testing

This list is a summary of the conditions noted to the equipment during testing.

Summary of Conditions
None

## EQUIPMENT UNDER TEST (EUT)

During testing, numerous configurations may have been utilized. The configurations listed below support compliance to the standard(s) listed in the Summary of Results section.

### Configuration 1

#### *Equipment Tested:*

Device	Manufacturer	Model #	S/N
5 Band Mobile Booster	Cellphone-Mate, Inc.	Fusion2Go-Max	2

#### *Support Equipment:*

Device	Manufacturer	Model #	S/N
Power Supply	Surecall	GME36A-120300FDS	NA



## General Product Information:

Product Information	Manufacturer-Provided Details
Equipment Type:	Stand-Alone Equipment
Type of Equipment	Wideband Consumer booster/Zone Enhancer
Operating Frequency Range:	UL: 824-849MHz DL: 869-894MHz  UL: 1850-1915MHz DL: 1930-1995MHz  UL: 1710-1755MHz, 698-716MHz, 776-787MHz DL: 2110-2155MHz, 728-746MHz, 746-757MHz
OBW and Emissions Type(s):	GXW (GSM) G7W (EDGE) F9W(CDMA) F9W(WCDMA) W7D (LTE) See Section 7.10 for OBW
Modulation Type(s):	0.3 GMSK (GSM) 3p/8 8-PSK (EDGE) QPSK (CDMA) BPSK/QPSK (WCDMA) OFDM (LTE)
Number of TX Chains:	1
Antenna Type(s) and Gain:	Dedicated, See antenna kitting information
Beamforming Type:	NA
Antenna Connection Type:	Donor/Outdoor antenna/ UL: 50-ohm UFL Server / indoor antenna/ DL: 50-ohm FME
Nominal Input Voltage:	12VDC
Firmware used for Test:	SC_HB_CarTop50_V1.0_No2_20181206

## FCC PART 20.21/22H/24E/27

### General Test Setup

#### Summary of Conditions

The equipment under test (EUT) is a Mobile Wideband Consumer Booster intended for automotive.

The EUT is placed on the Styrofoam platform for radiated emission and a test bench for conducted emission measurement.

UL: 824-849MHz

DL: 869-894MHz

UL: 1850-1915MHz

DL: 1930-1995MHz

UL: 1710-1755MHz, 698-716MHz, 776-787MHz

DL: 2110-2155MHz, 728-746MHz, 746-757MHz

Test procedure:

The test was performed in accordance with the FCC document: 935210 D03 Signal Booster Measurements v04r02, dated June19, 2018.

Firmware: SC\_HB\_CarTop50\_V1.0\_No2\_20181206

Device is powered by a support 12V DC power supply

## 7.1 Authorized Frequency Band Verification

### Test Conditions / Setup

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170  
 Customer: Cellphone-Mate, Inc.  
 Specification: **7.1 Authorized Frequency Band Verification**  
 Work Order #: **102180** Date 01/14/2019  
 Test Type: **Conducted Emissions**  
 Tested By: **Hieu Song Nguyenpham**  
 Software: EMITest 5.03.11

**Equipment Tested:**

Device	Manufacturer	Model #	S/N
Configuration 1			

**Support Equipment:**

Device	Manufacturer	Model #	S/N
Configuration 1			

**Test Conditions / Notes:**

Test environment conditions: Temperature: 22.0°C, 60% relative humidity, Pressure:100.9 kPa
---


**Test Equipment:**

Asset #	Description	Manufacturer	Model	Calibration Date	Cal Due Date
P05411	Attenuator	Weinschel	54A-10	1/19/2018	1/19/2020
P07192	Cable	Astro	32022-29094K-29094K-48TC	10/9/2017	10/9/2019
P07191	Cable	Astro	32022-29094K-29094K-48TC	10/30/2017	10/30/2019
03418	Signal Generator	Agilent	E4438C	6/19/2017	6/19/2019
03471	Spectrum Analyzer	Agilent	E4440A	1/18/2018	1/18/2020


### Summary of Results

Pass: The plots above show the device only operates on the CMRS frequency bands authorized for use by the NPS.


**Plots**

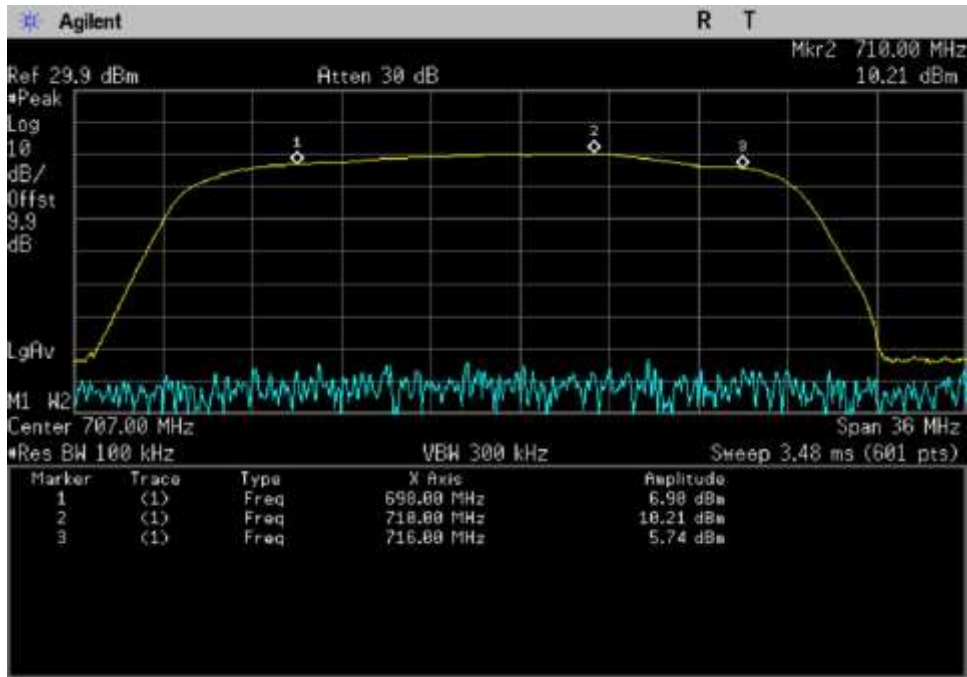


UL\_698-716\_698-710MHz

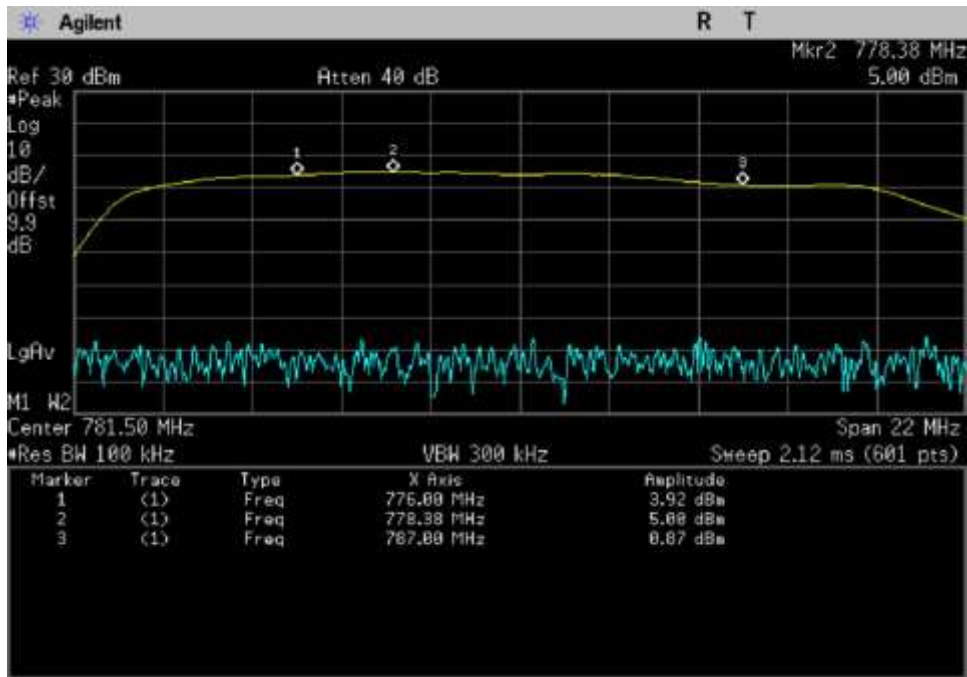


UL\_776-787\_776-778.38MHz

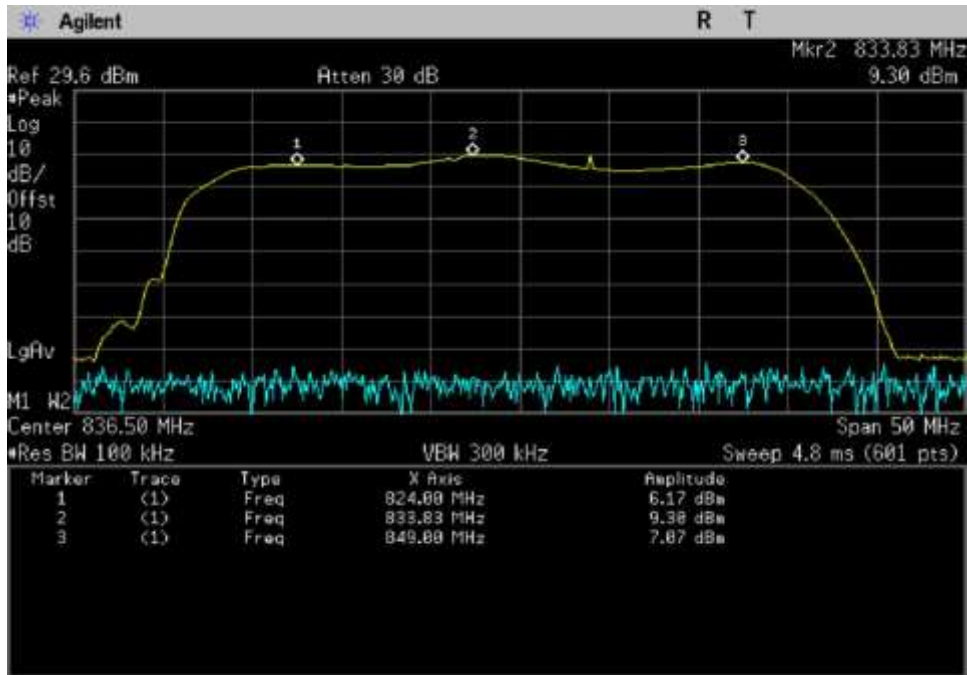


UL\_824-849\_824-833.83MHz

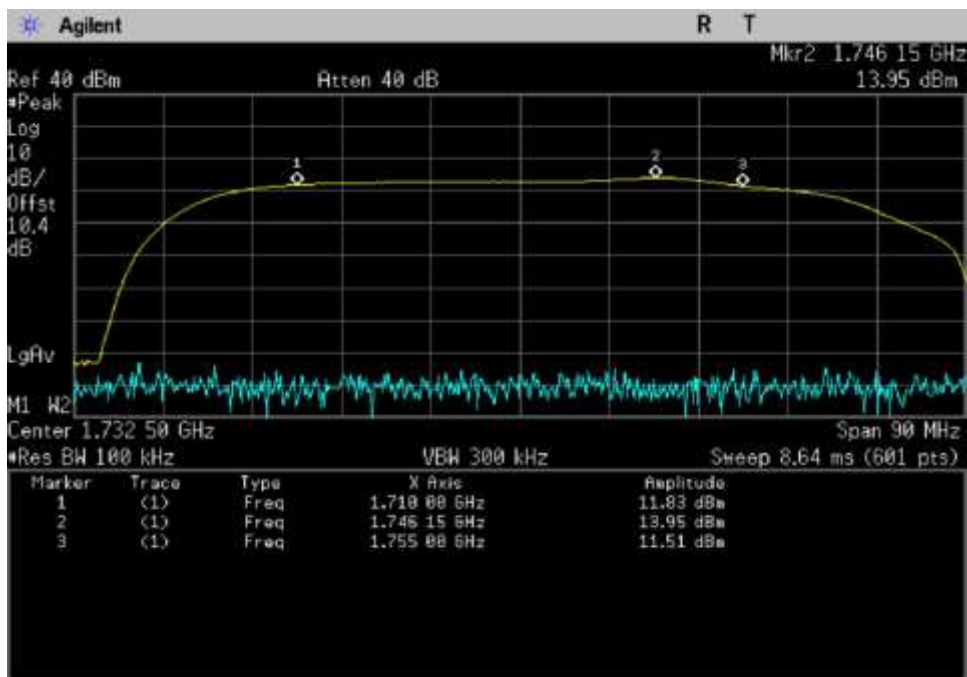


UL\_1710-1755\_1710-1746.15MHz

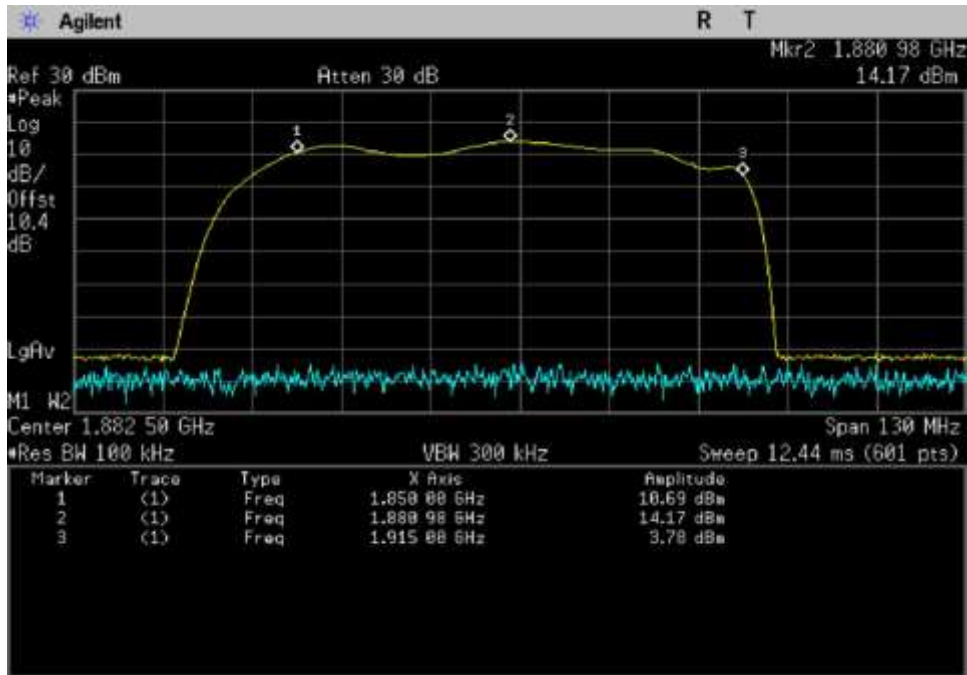


UL\_1850-1915\_ 1850- 1880.98MHz

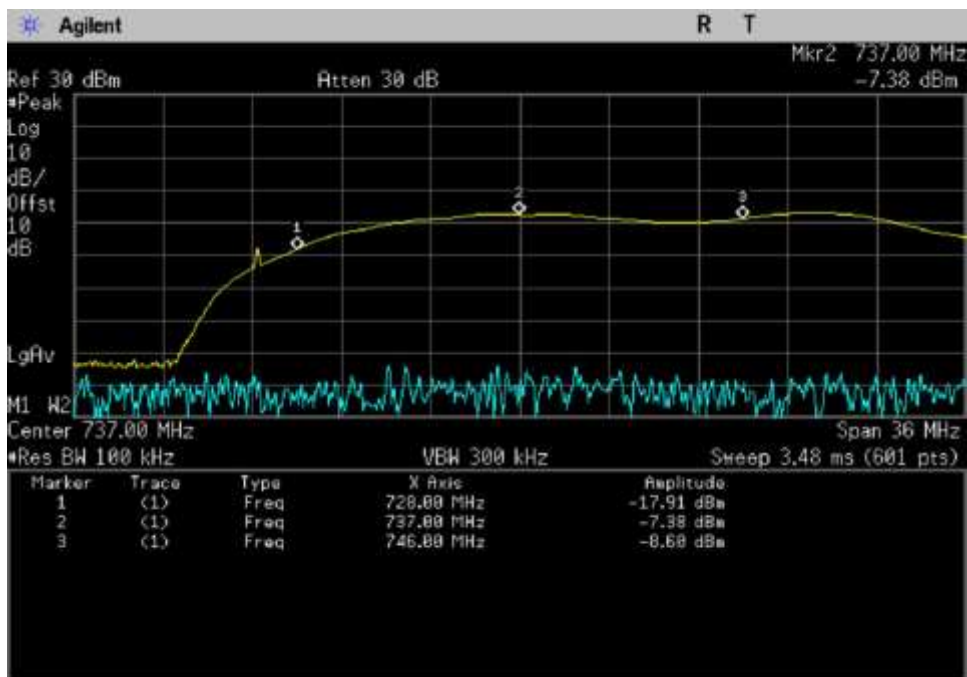

DL\_728-746\_ 728- 737MHz

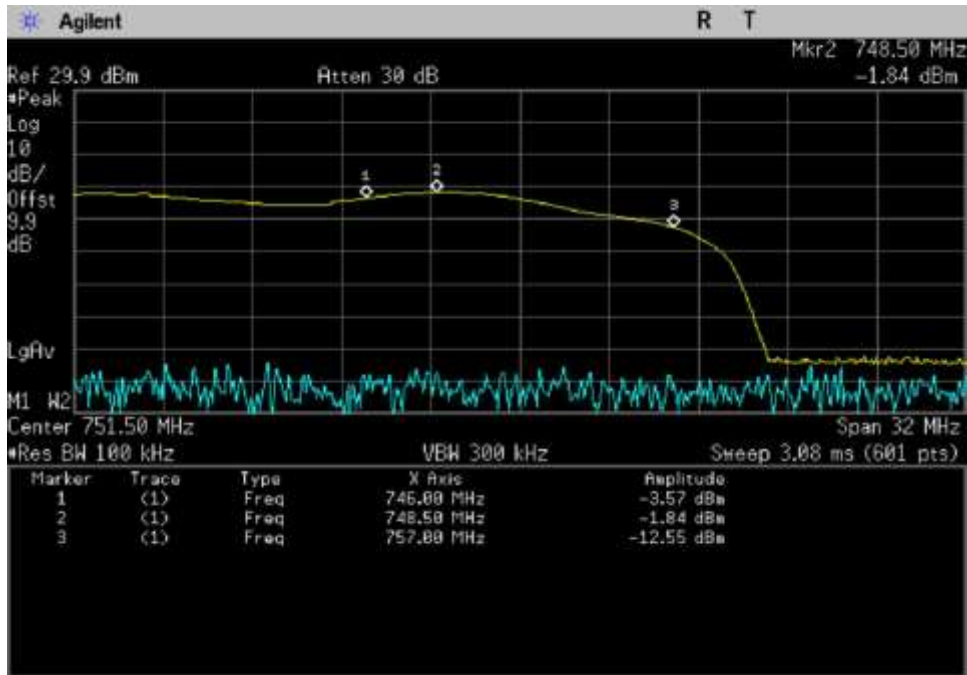


DL\_746-757\_ 746- 748.5MHz

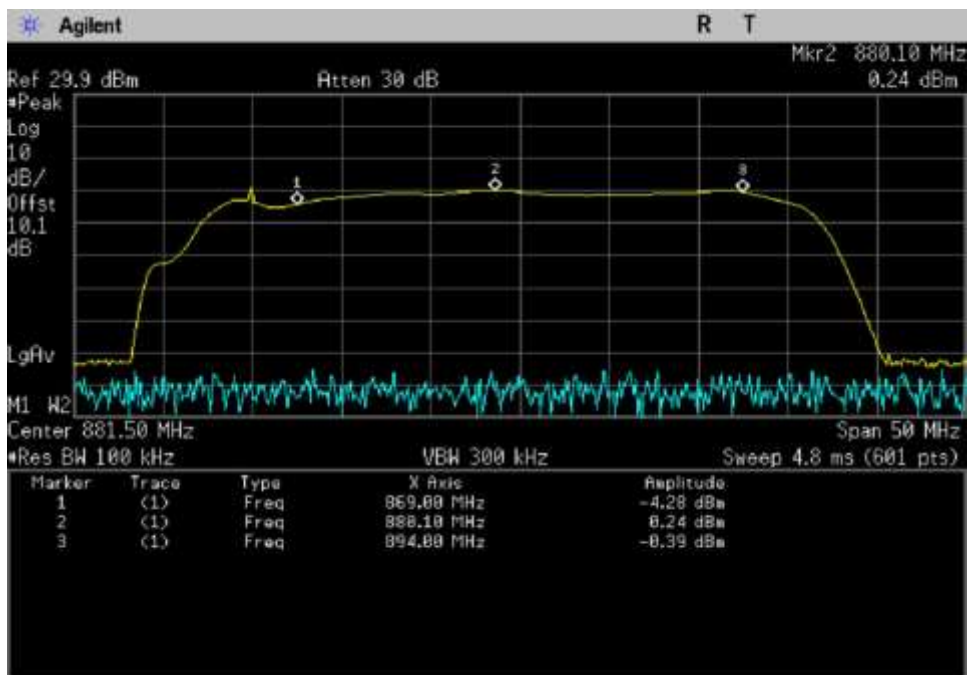


DL\_869-894\_ 869- 880.1MHz



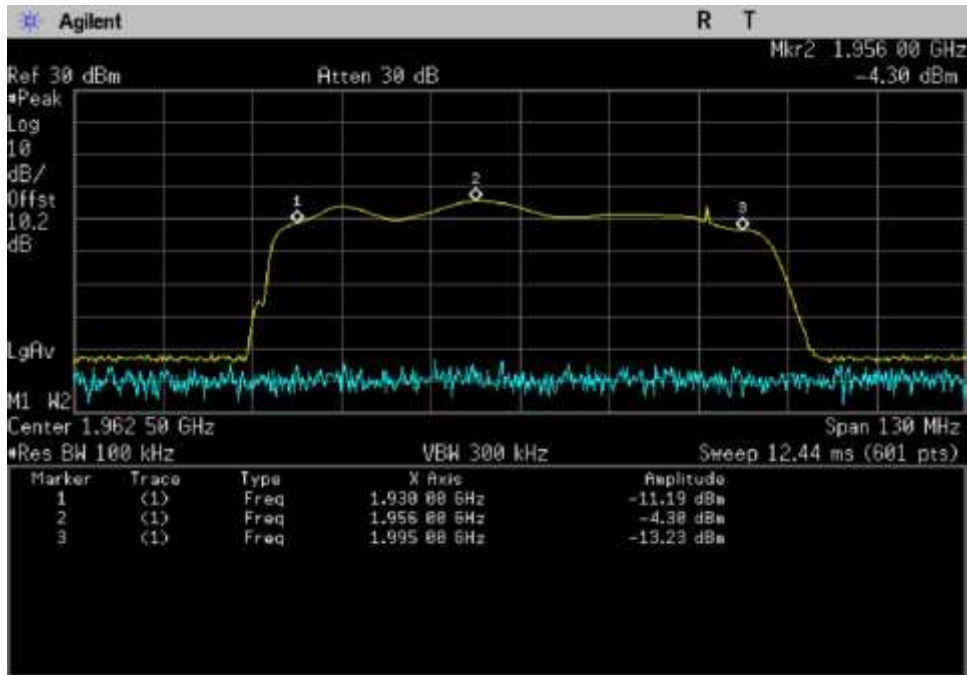

DL\_1930-1995\_ 1930- 1956MHz

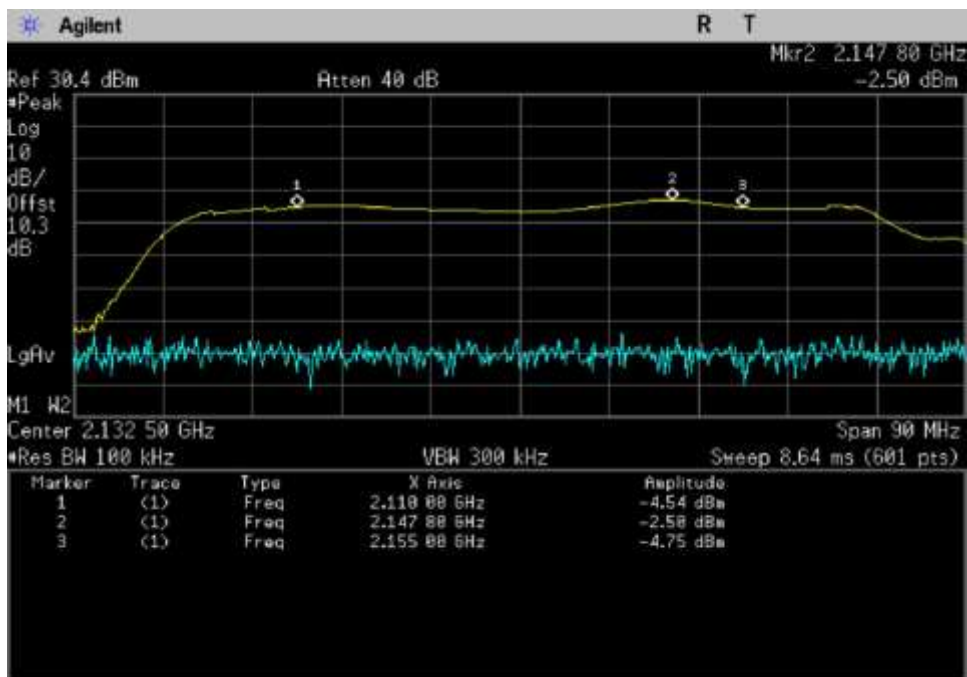

DL\_2110-2155\_ 2110- 2147.8MHz



**7.2 Maximum Power / 7.3 Maximum Booster Gain**

**Test Conditions / Setup**

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170  
 Customer: Cellphone-Mate, Inc.  
 Specification: **7.2 Maximum Power Measurement**  
**7.3 Maximum Booster Gain**  
 Work Order #: **102180** Date 01/16/2019  
 Test Type: **Conducted Emissions**  
 Tested By: **Hieu Song Nguyenpham**  
 Software: EMITest 5.03.11

**Equipment Tested:**

Device	Manufacturer	Model #	S/N
Configuration 1			

**Support Equipment:**

Device	Manufacturer	Model #	S/N
Configuration 1			

**Test Conditions / Notes:**

Test environment conditions: Temperature: 22.5°C, 52% relative humidity, Pressure: 101.5kPa  
 Modification #1 was in place during testing.

**Test Equipment:**

Asset #	Description	Manufacturer	Model	Calibration Date	Cal Due Date
P05411	Attenuator	Weinschel	54A-10	1/19/2018	1/19/2020
P07192	Cable	Astro	32022-29094K-29094K-48TC	10/9/2017	10/9/2019
P07191	Cable	Astro	32022-29094K-29094K-48TC	10/30/2017	10/30/2019
03418	Signal Generator	Agilent	E4438C	6/19/2017	6/19/2019
03471	Spectrum Analyzer	Agilent	E4440A	1/18/2018	1/18/2020

## Summary of Results

Pass: as summarized in table below, measured EIRP, Gain and UL/DL gain ratio are within limits.

Pre AGC				Pre AGC		
	Pulse GSM			4.1 MHz AWGN		
Frequency (MHz)	Input (dBm)	Output (dBm)	Gain (dB)	Input (dBm)	Output (dBm)	Gain (dB)
UL1710-1755	-24.9	22.3	47.2	-26.4	20.1	46.5
UL1850-1915	-23.2	24.3	47.5	-24.6	21.8	46.4
UL824-894	-14.8	26.4	41.2	-16.3	24.3	40.6
UL 698-716	-17.7	24.9	42.6	-17.9	24.0	41.9
UL776-787	-16.6	25.4	42.0	-15.8	25.3	41.1
DL2110-2155	-36.3	3.0	39.3	-39.9	-0.3	39.6
DL1930-1995	-38.0	2.9	40.9	-39.1	2.0	41.1
DL869-894	-39.8	6.0	45.8	-41.9	3.9	45.8
DL:728-746	-40.6	2.3	42.9	-42.7	0.6	43.3
DL 746-757	-38.3	5.0	43.3	-40.5	2.8	43.3

Pulse GSM					Conducted	Conducted and EIRP
Frequency (MHz)	Output Power (dBm)	*Ant Gain (dBi)	Cable (dB)	EIRP (dBm)	Limit Min (dBm)	Limit Max (dBm)
UL1710-1755	22.3	2.2	0.2	24.3	17	30
UL1850-1915	24.3	3.2	0.2	27.3	17	30
UL824-894	26.4	2.6	0.1	28.9	17	30
UL 698-716	24.9	0.6	0.1	25.4	17	30
UL776-787	25.4	-0.4	0.1	24.9	17	30
DL2110-2155	3.0	10.0	3.8	9.2	NA	17
DL1930-1995	2.9	10.0	3.6	9.3	NA	17
DL869-894	6.0	7.0	2.3	10.7	NA	17
DL:728-746	2.3	7.0	2.1	7.2	NA	17
DL 746-757	5.0	7.0	2.1	9.9	NA	17

4.1MHz AWGN					Conducted	Conducted and EIRP
Frequency (MHz)	Output Power (dBm)	*Ant Gain (dBi)	Cable (dB)	EIRP (dBm)	Limit Min (dBm)	Limit Max (dBm)
UL1710-1755	20.1	2.2	0.2	22.1	17	30
UL1850-1915	21.8	3.2	0.2	24.8	17	30
UL824-894	24.3	2.6	0.1	26.8	17	30
UL 698-716	24.0	0.6	0.1	24.5	17	30
UL776-787	25.3	-0.4	0.1	24.8	17	30
DL2110-2155	-0.3	10.0	3.8	5.9	NA	17
DL1930-1995	2.0	10.0	3.6	8.4	NA	17
DL869-894	3.9	7.0	2.3	8.6	NA	17
DL:728-746	0.6	7.0	2.1	5.5	NA	17
DL 746-757	2.8	7.0	2.1	7.7	NA	17

\* Antenna gain and cable losses indicated from Fusion2Go-Max Marine-1 Kit

UL SC328W

DL SC248W and SC240-20FN


Section 5.5 power						
Frequency (MHz)	Pulse GSM			4.1 MHz AWGN		
	Input (dBm)	Output (dBm)	Gain (dB)	Input (dBm)	Output (dBm)	Gain (dB)
UL1710-1755	10.0	22.3	12.3	10.0	19.8	9.8
UL1850-1915	10.0	23.8	13.8	10.0	21.5	11.5
UL824-894	10.0	26.0	16.0	10.0	22.6	12.6
UL 698-716	10.1	24.2	14.1	10.1	24.0	13.9
UL776-787	10.1	24.6	14.5	10.1	24.6	14.5
DL2110-2155	-32.4	2.6	35.0	-34.9	-0.7	34.2
DL1930-1995	-34.9	2.4	37.3	-33.9	1.4	35.3
DL869-894	-35.0	5.6	40.6	-36.9	3.8	40.7
DL:728-746	-35.8	2.3	38.1	-37.4	0.2	37.6
DL 746-757	-34.3	5.0	39.3	-34.9	2.8	37.7

Note: The booster went into Transmitter off mode at Max input power in accordance with section 5.5. Results presented on the above table are at 1 dB below the Transmit off RF input level.


UL gain vs DL gain	Pulse GSM (dB)	4.1MHz AWGN (dB)	Limit (dB)
UL gain vs DL gain 1710/2110	7.9	6.9	9.0
UL gain vs DL gain 1850/1930	6.6	5.3	9.0
UL gain vs DL gain 824/869	-4.6	-5.2	9.0
UL gain vs DL gain 776/728	-0.3	-1.4	9.0
UL gain vs DL gain 776/746	-1.3	-2.2	9.0

**Plots**


**AWGN**

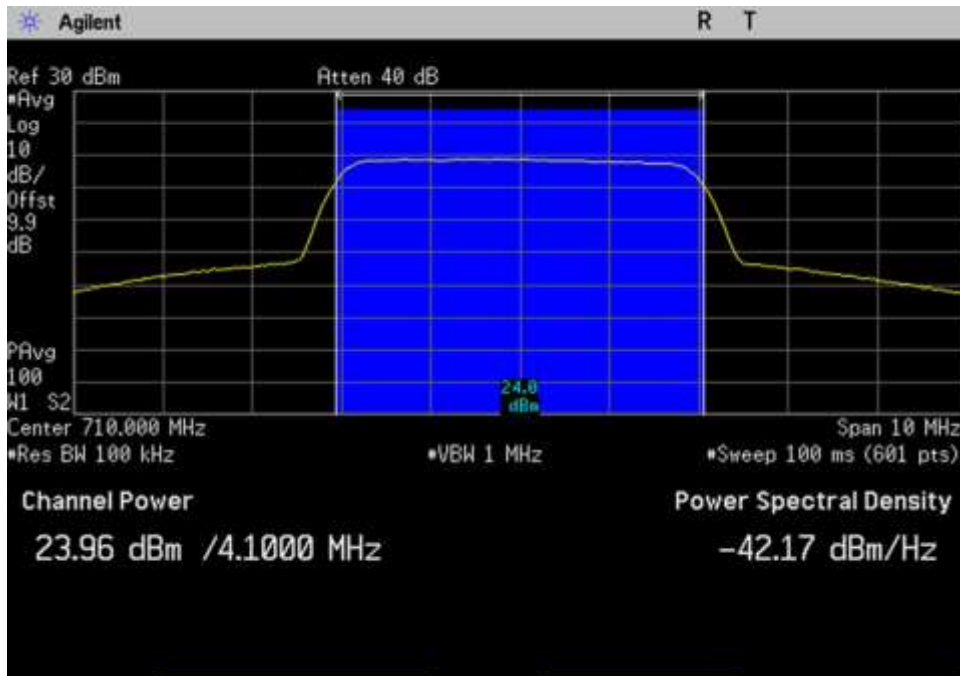


UL\_698-716\_AWGN\_710MHz

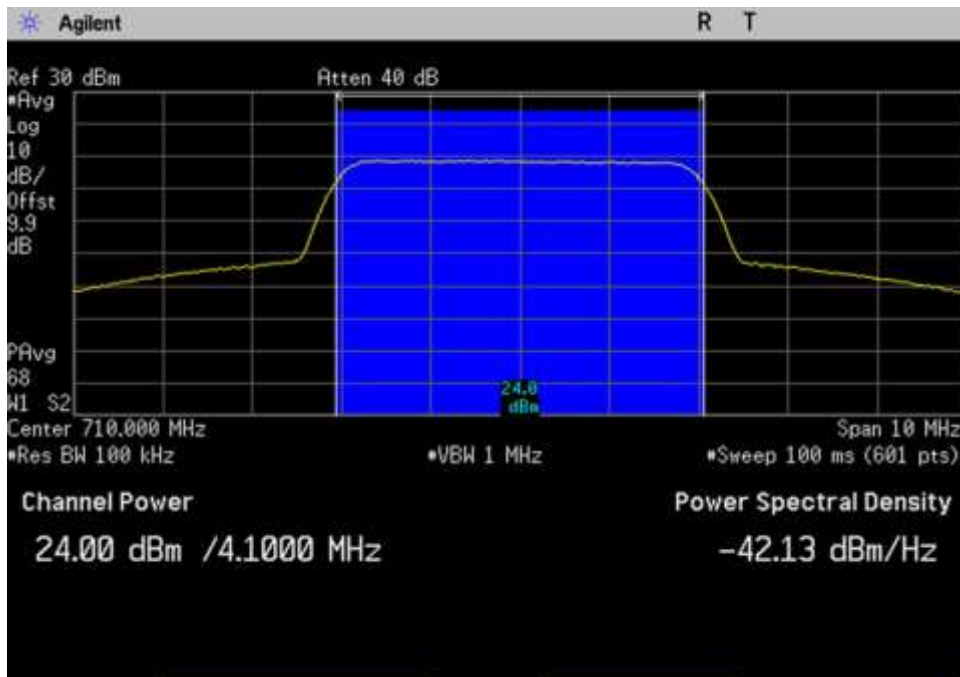


UL\_698-716\_AWGN\_710MHz

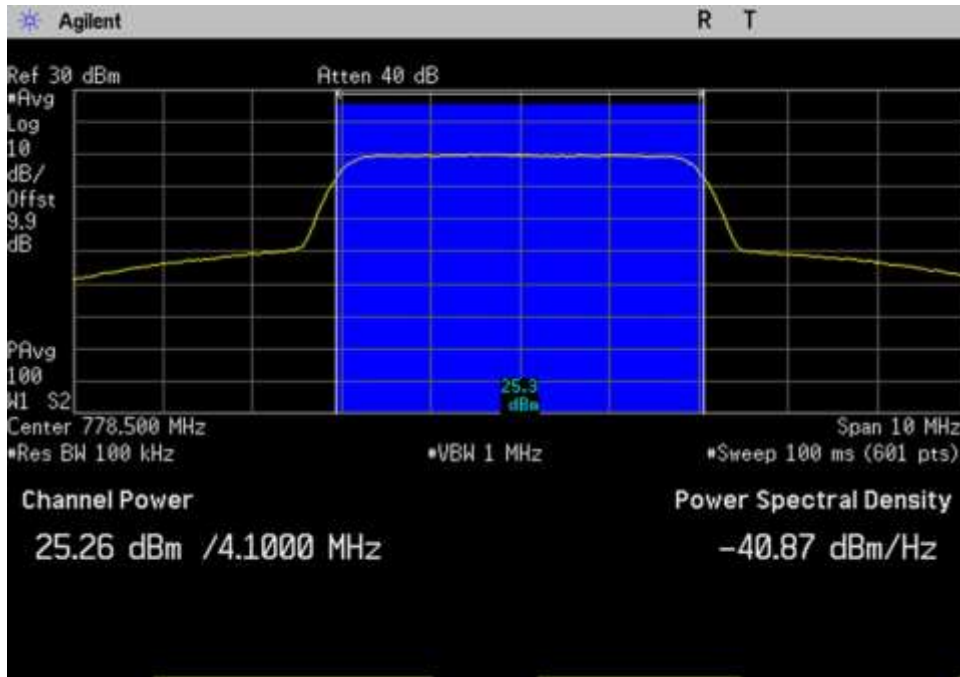


UL\_776-787\_AWGN\_778.5MHz

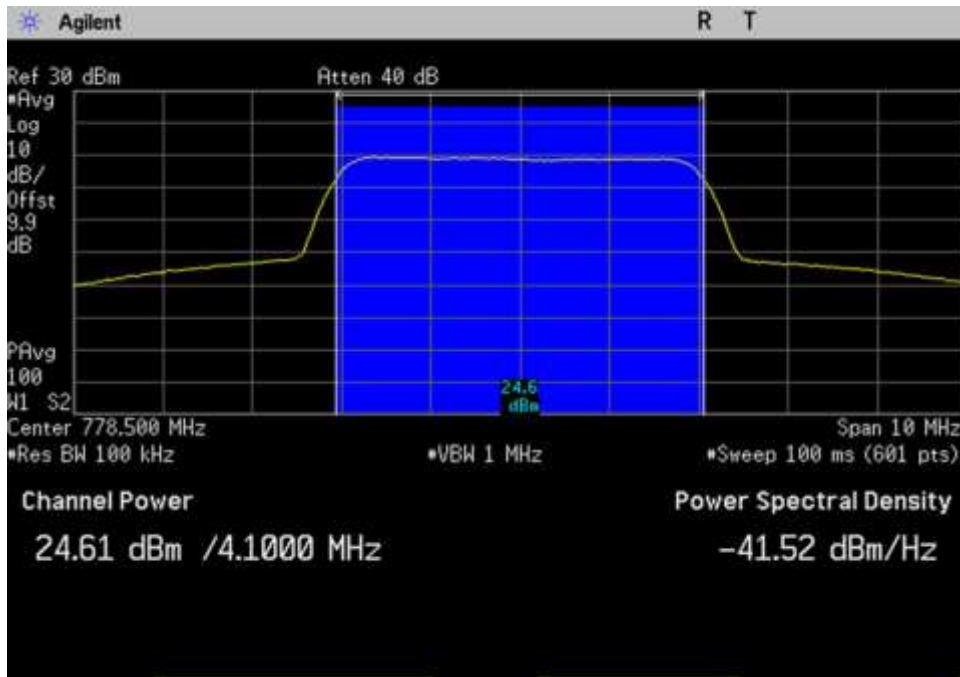


UL\_776-787\_AWGN\_Max\_778.5MHz

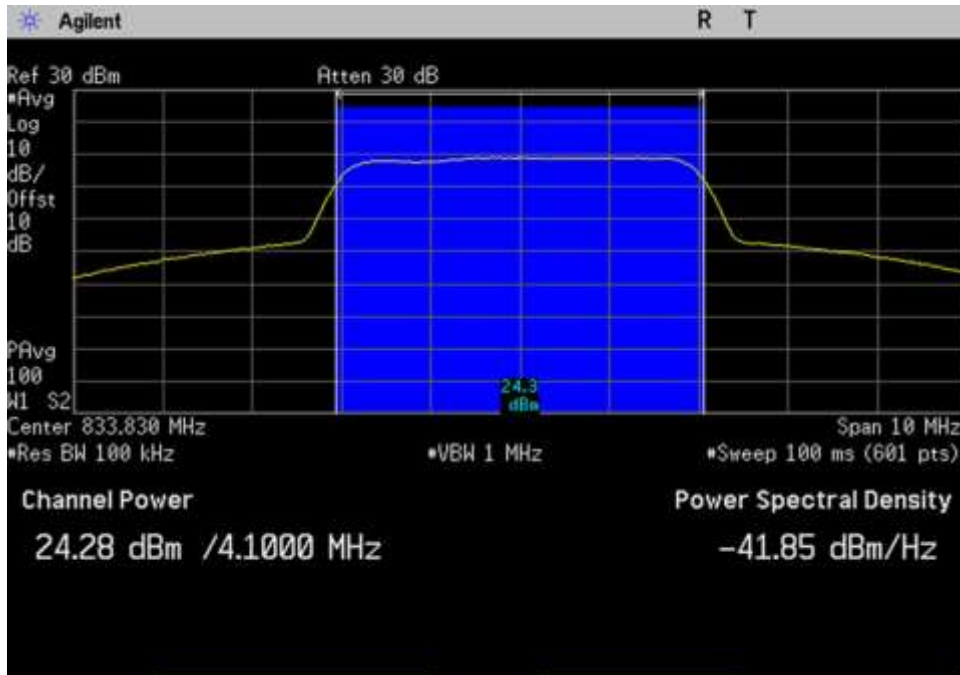


UL\_824-849\_AWGN\_ 833.83MHz

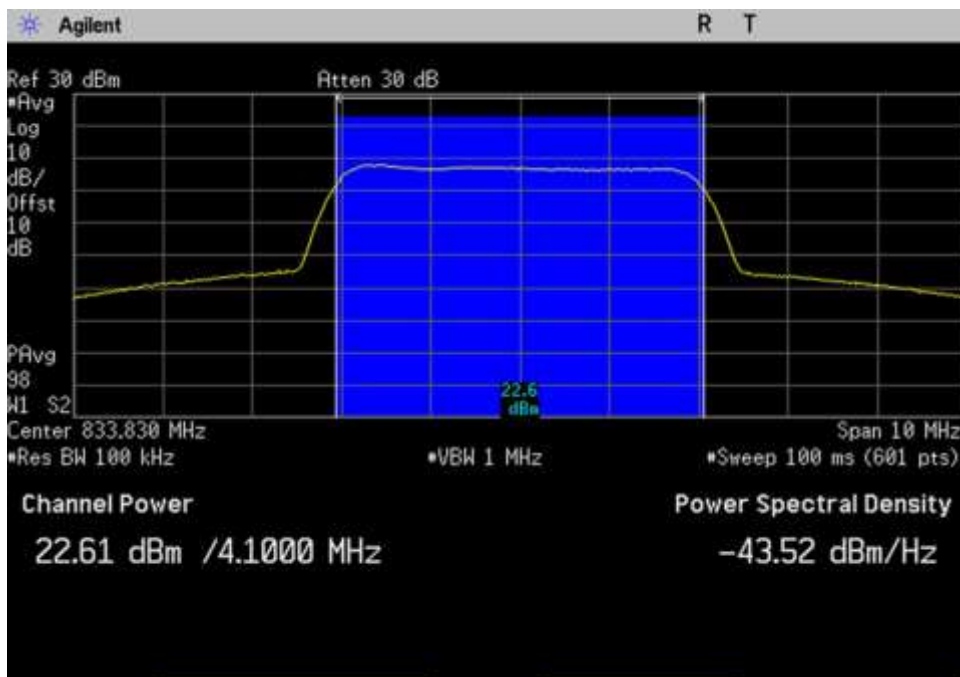

UL\_824-849\_AWGN\_Max\_ 833.83MHz

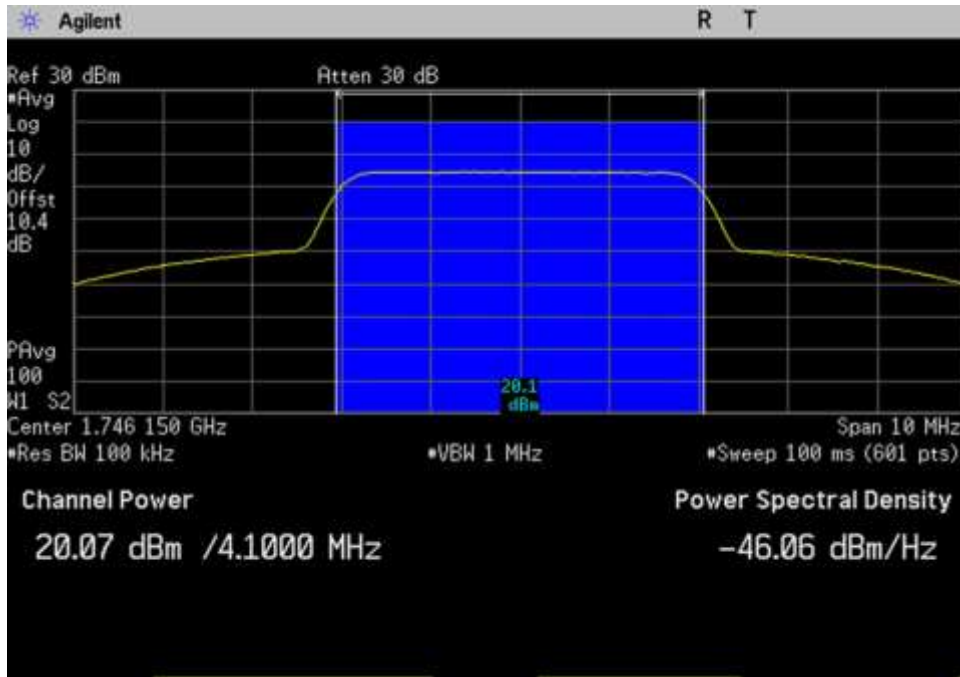


UL\_1710-1755\_AWGN\_1746.15MHz

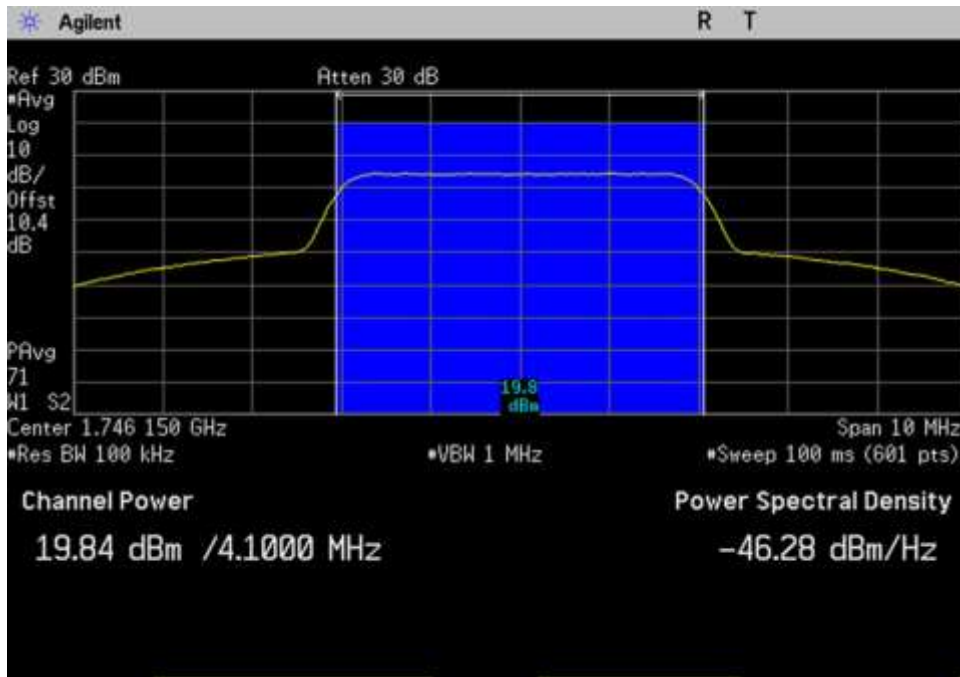


UL\_1710-1755\_AWGN\_Max\_1746.15MHz




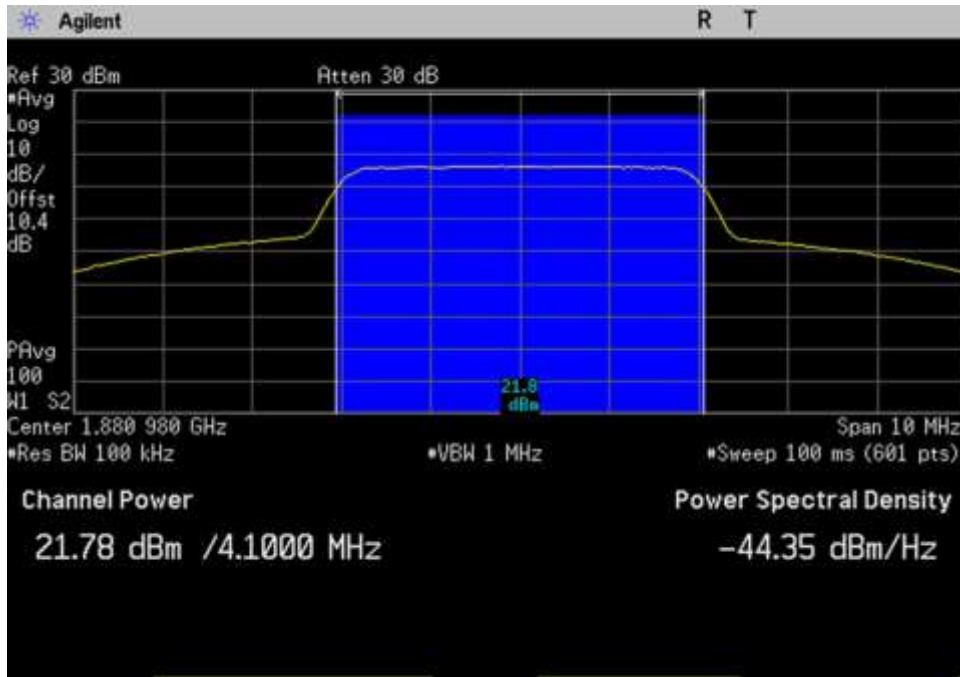


UL\_1850-1915\_AWGN\_1880.98MHz

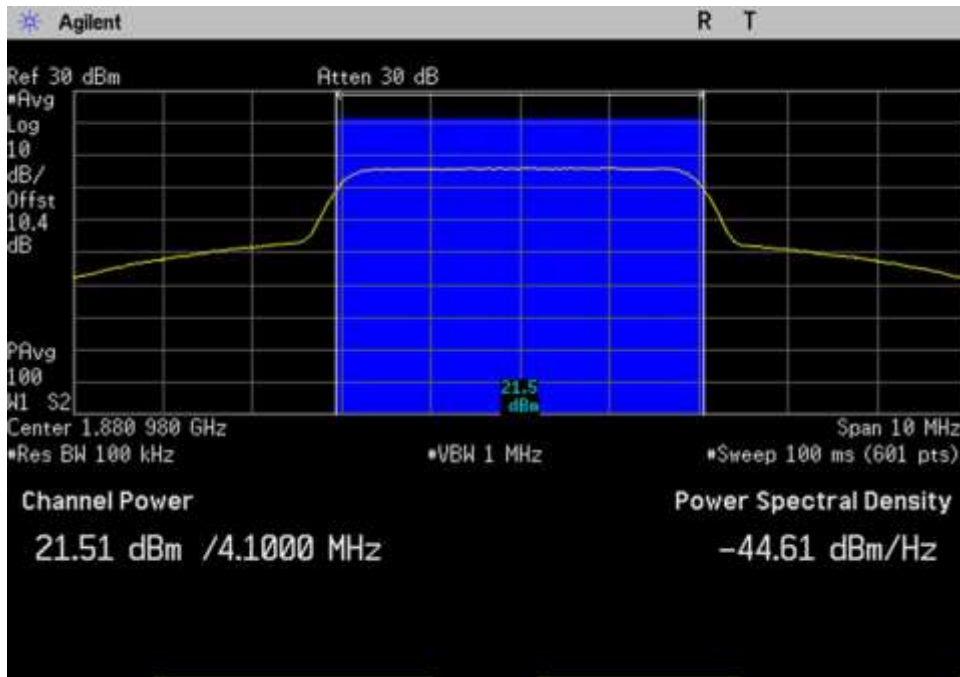


UL\_1850-1915\_AWGN\_Max\_1880.98MHz

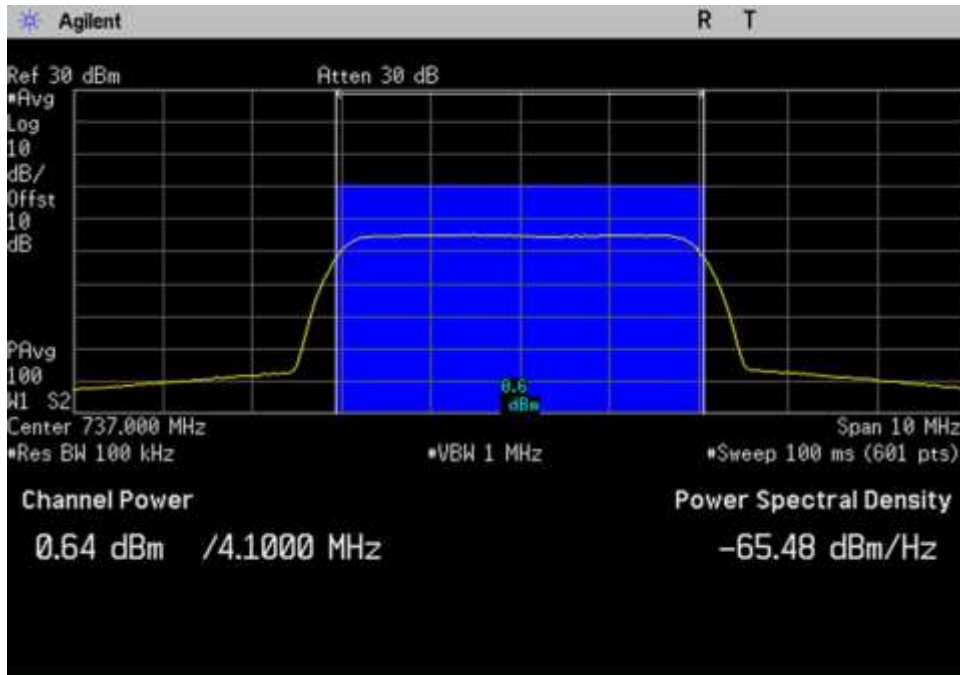


DL\_728-746\_AWGN\_737MHz

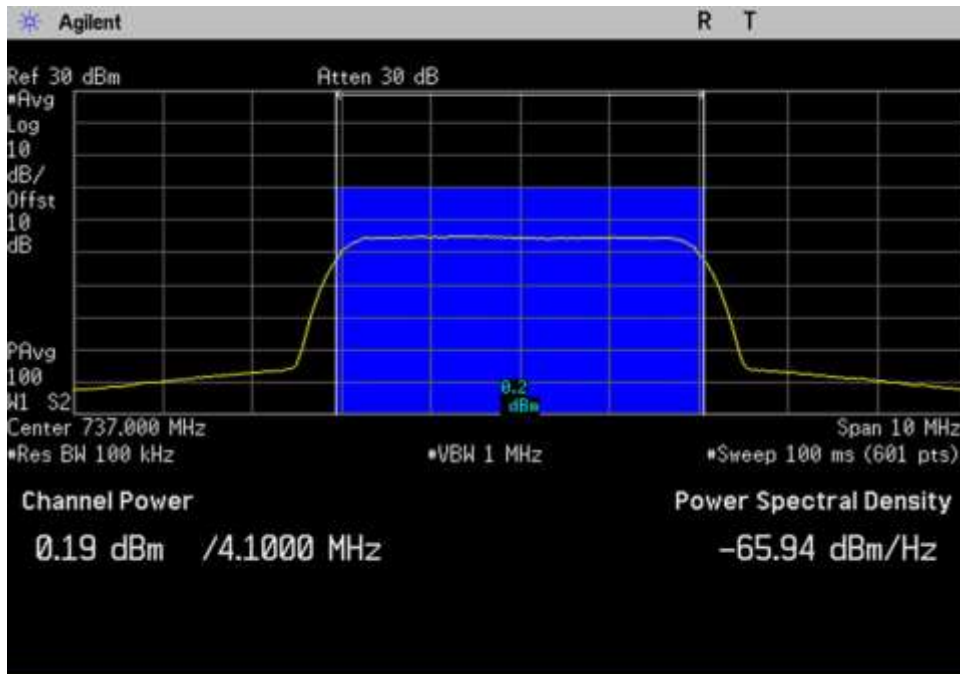


DL\_728-746\_AWGN\_Max\_737MHz

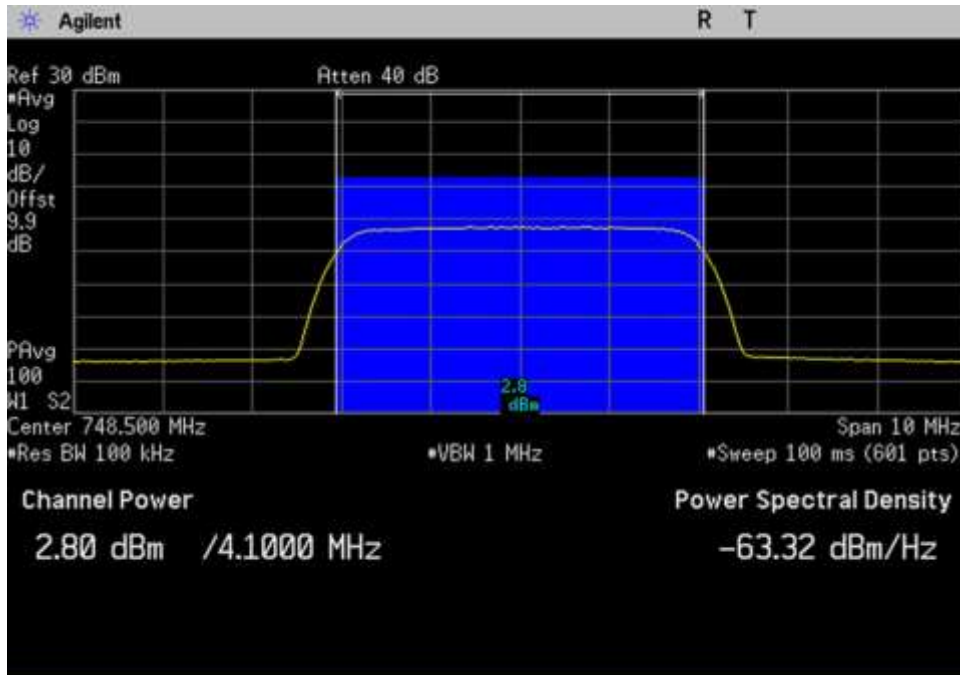


DL\_746-757\_AWGN\_748.5MHz

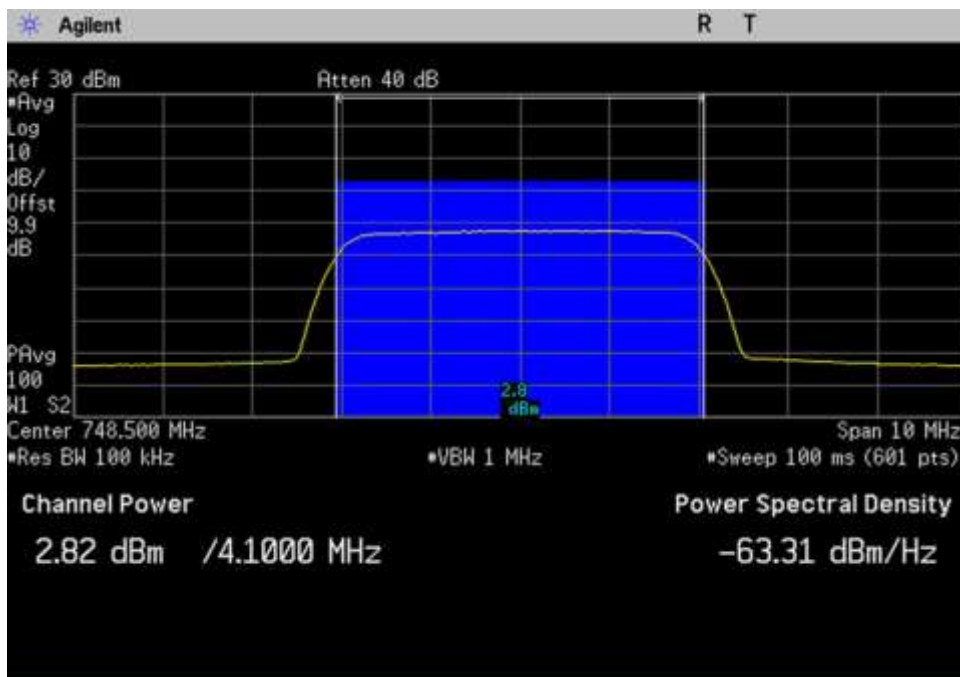


DL\_746-757\_AWGN\_Max\_748.5MHz

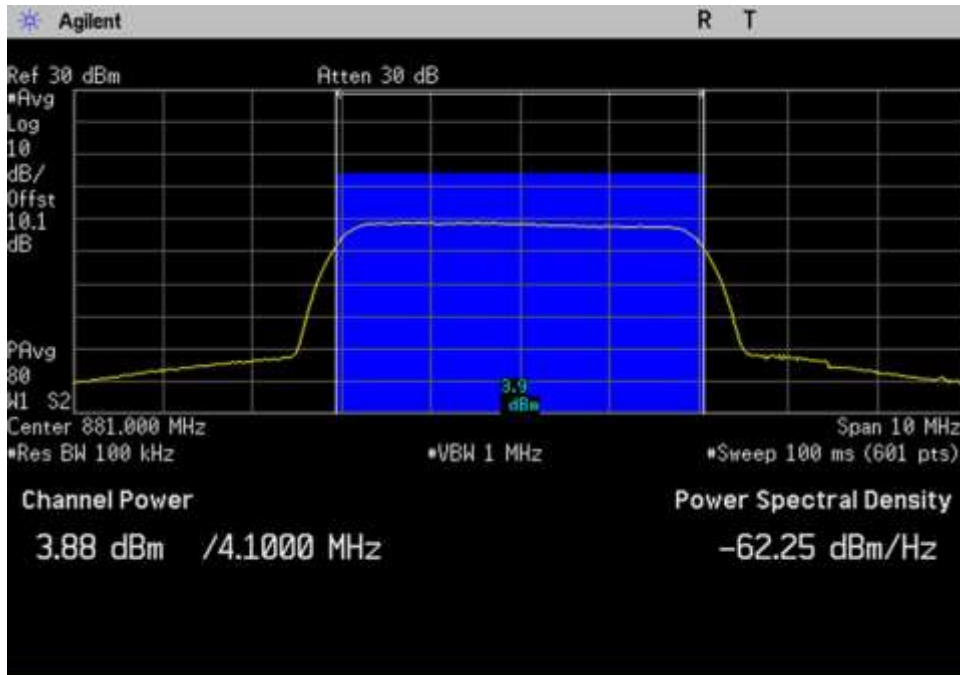

DL\_869-894\_AWGN\_881MHz

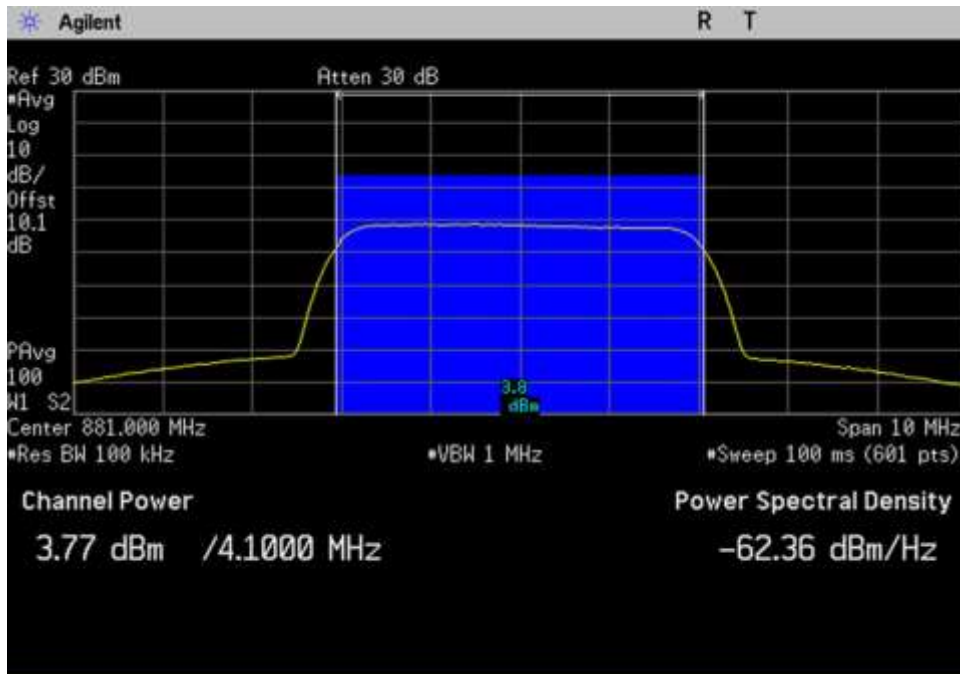


DL\_869-894\_AWGN\_Max\_881MHz

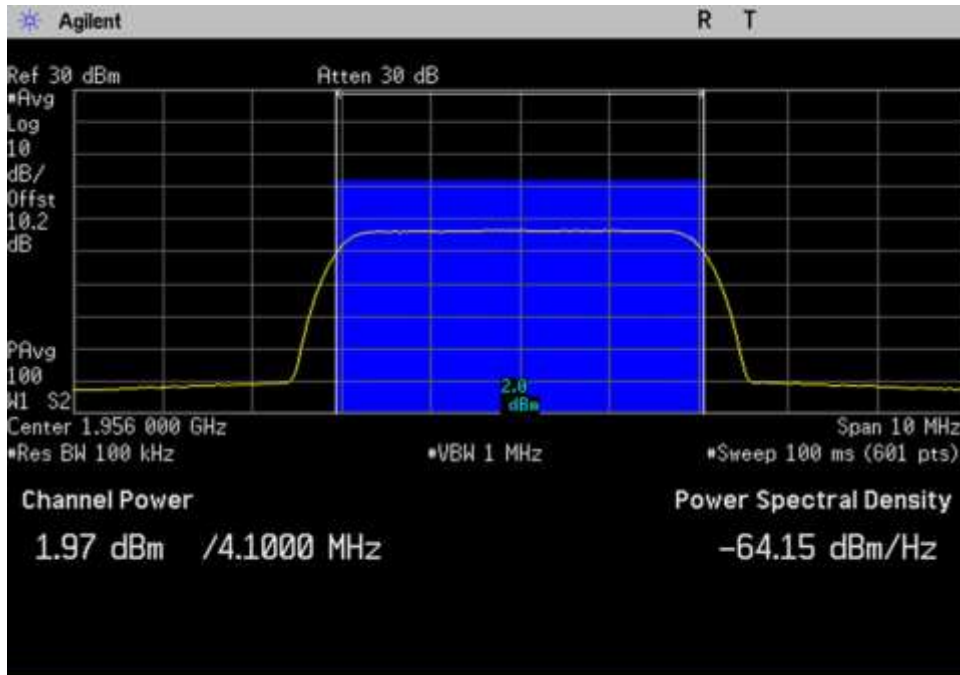


DL\_1930-1995\_AWGN\_1956MHz



DL\_1930-1995\_AWGN\_Max\_1956MHz

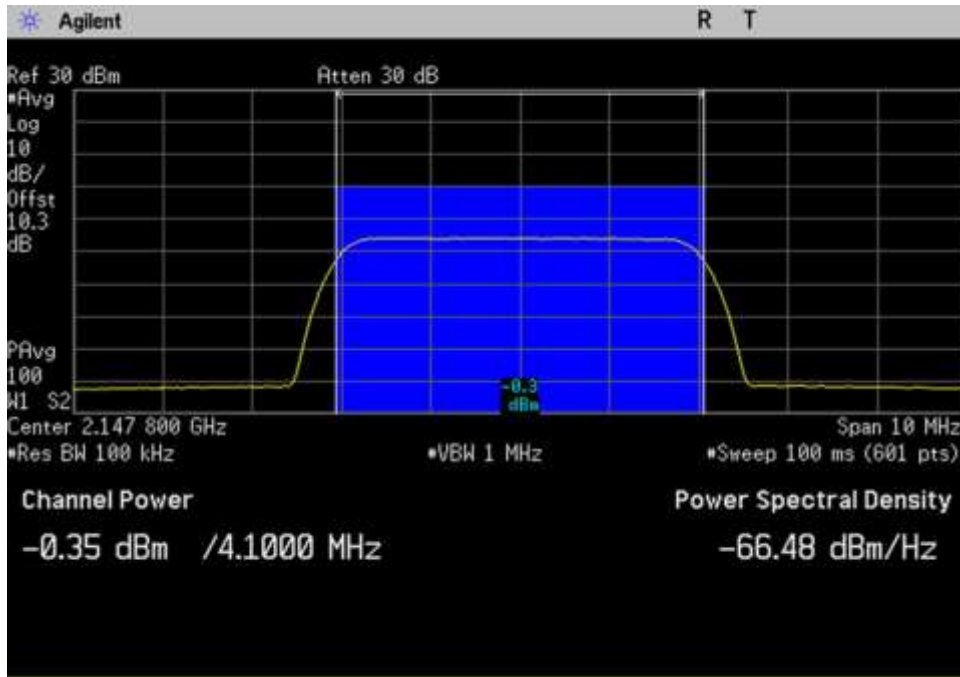


DL\_2110-2155\_AWGN\_2147.8MHz

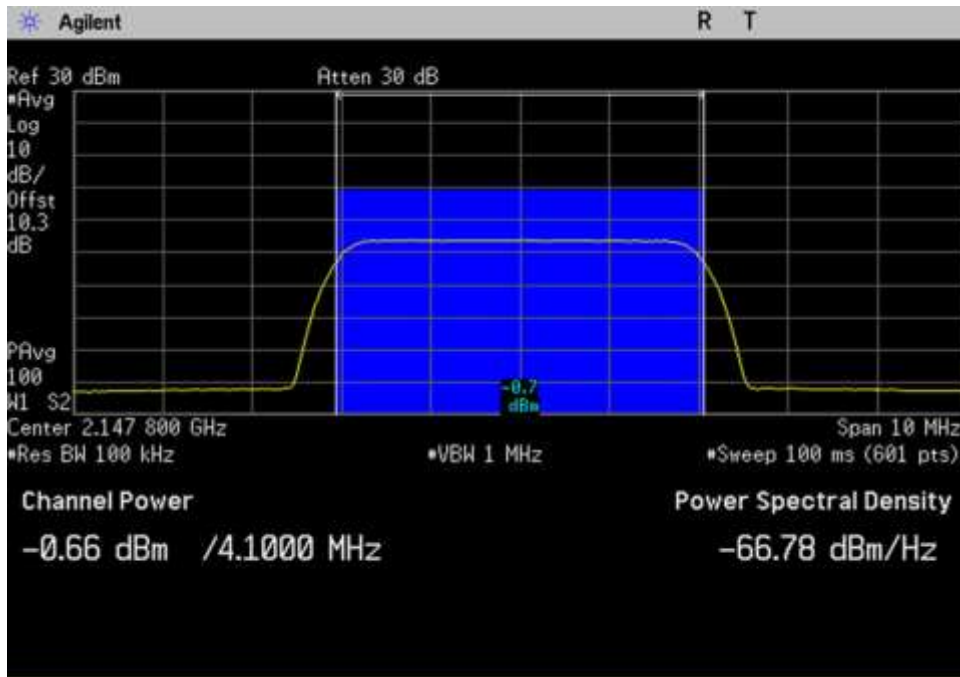


DL\_2110-2155\_AWGN\_Max\_2147.8MHz




**GSM**

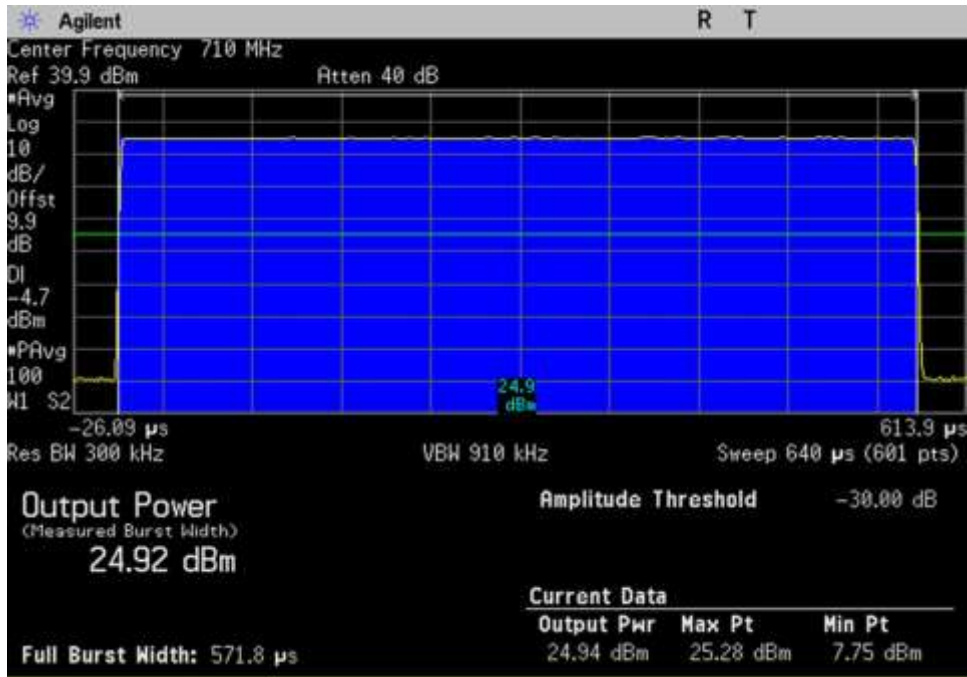


UL\_698-716\_GSM\_710MHz

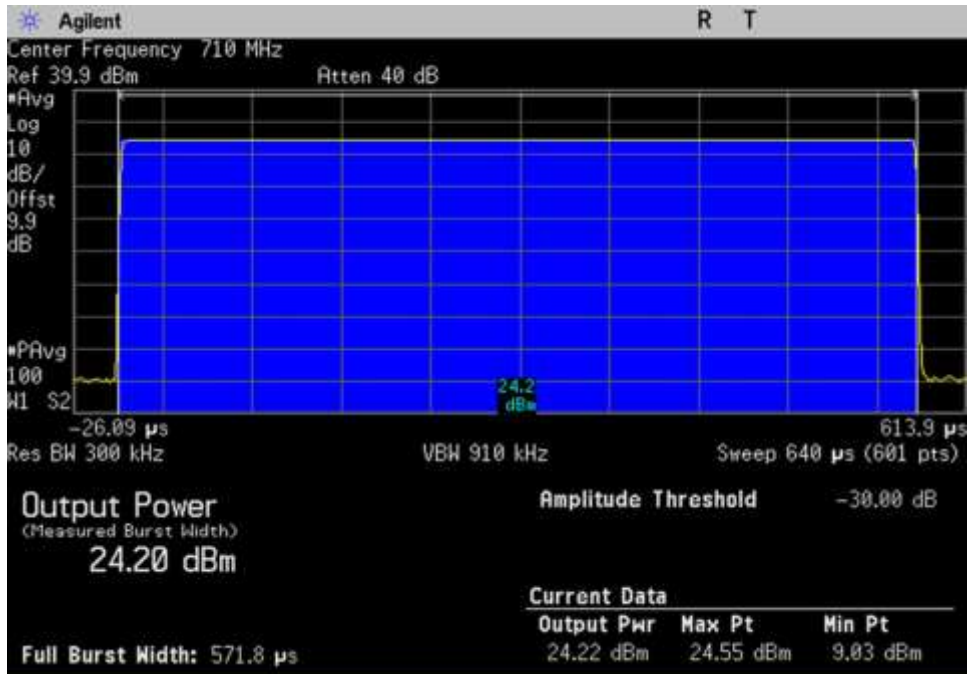

UL\_698-716\_GSM\_Max\_710MHz

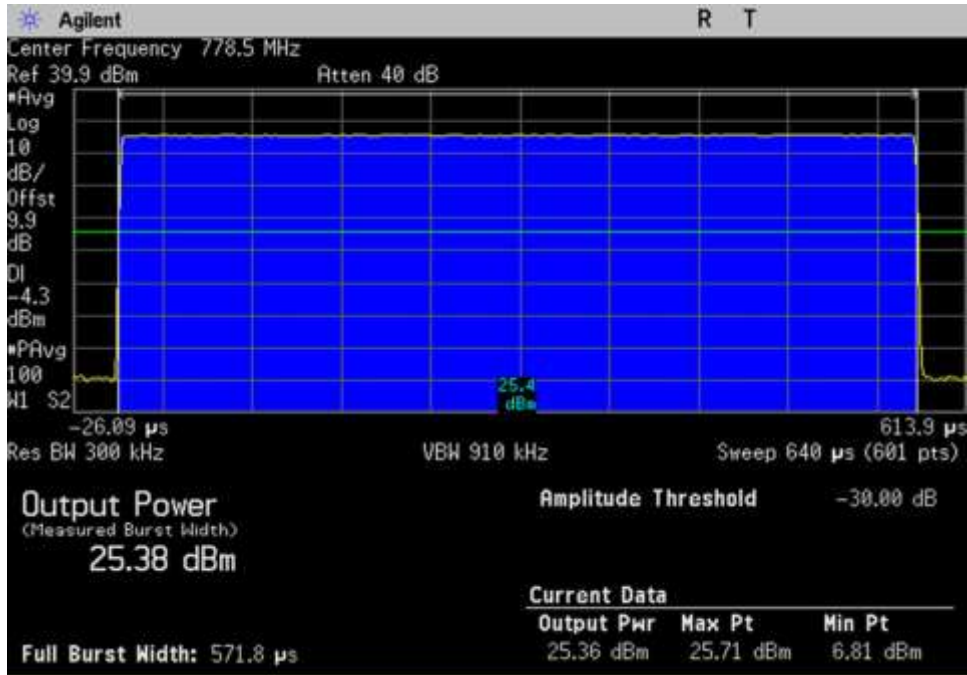


UL\_776-787\_GSM\_778.5MHz

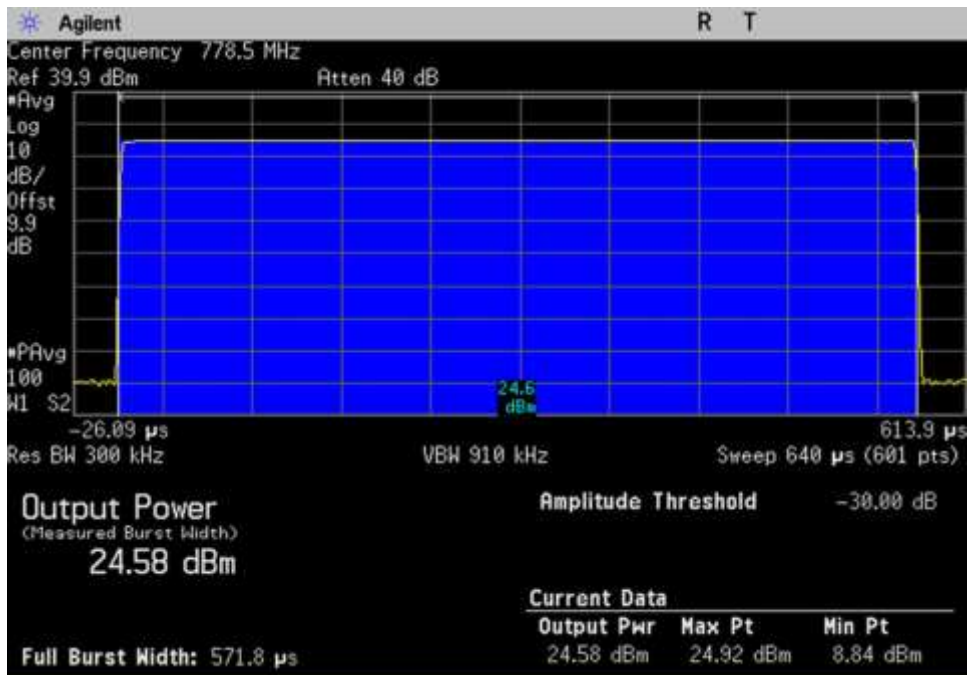


UL\_776-787\_GSM\_Max\_778.5MHz




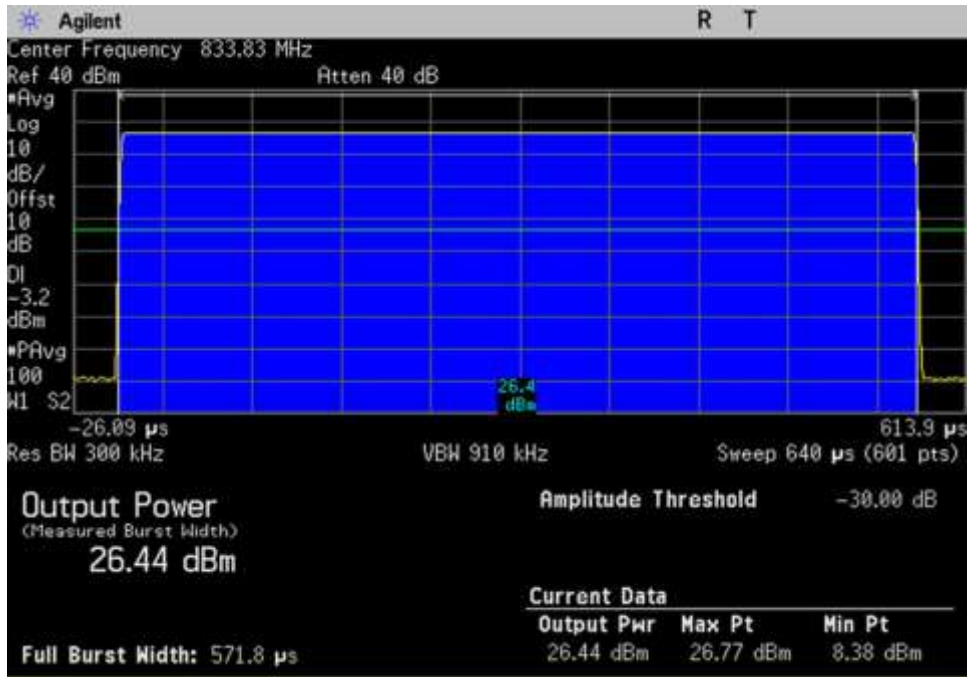


UL\_824-849\_GSM\_ 833.83MHz

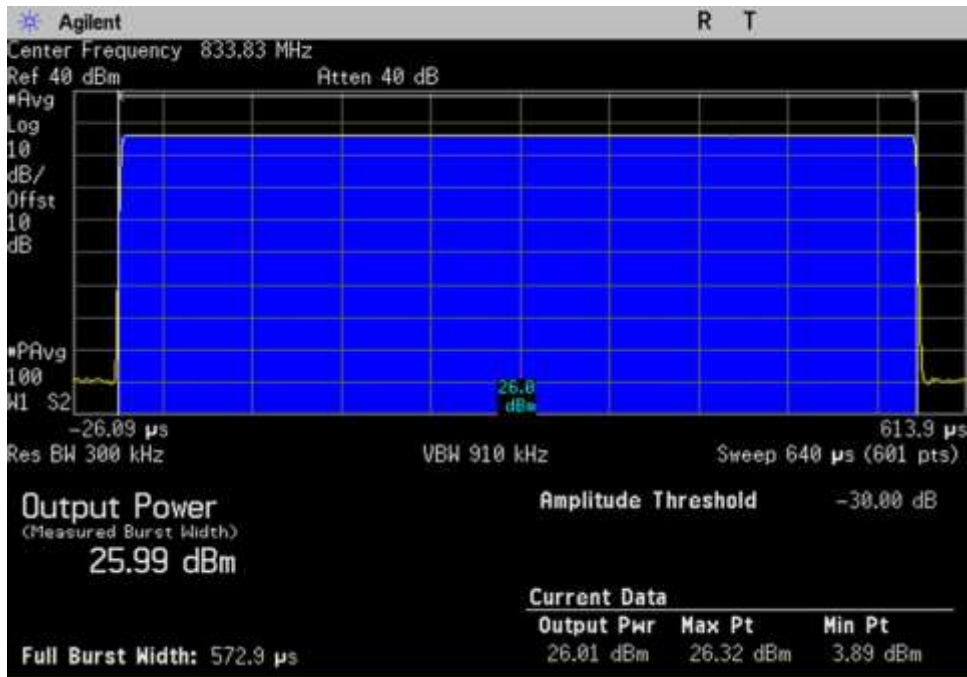


UL\_824-849\_GSM\_Max\_ 833.83MHz

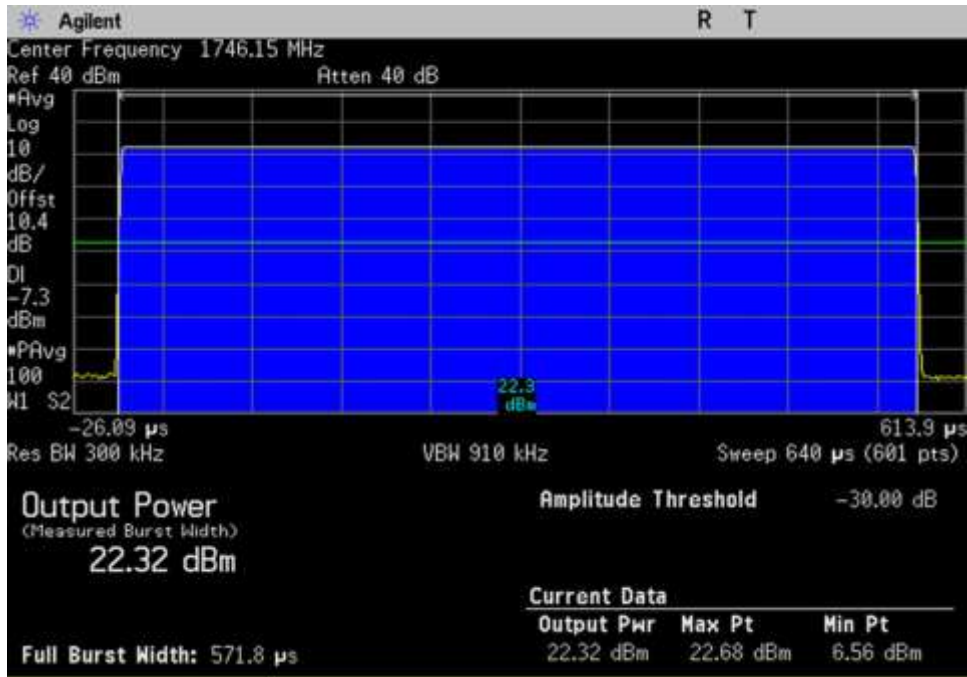


UL\_1710-1755\_GSM\_1746.15MHz

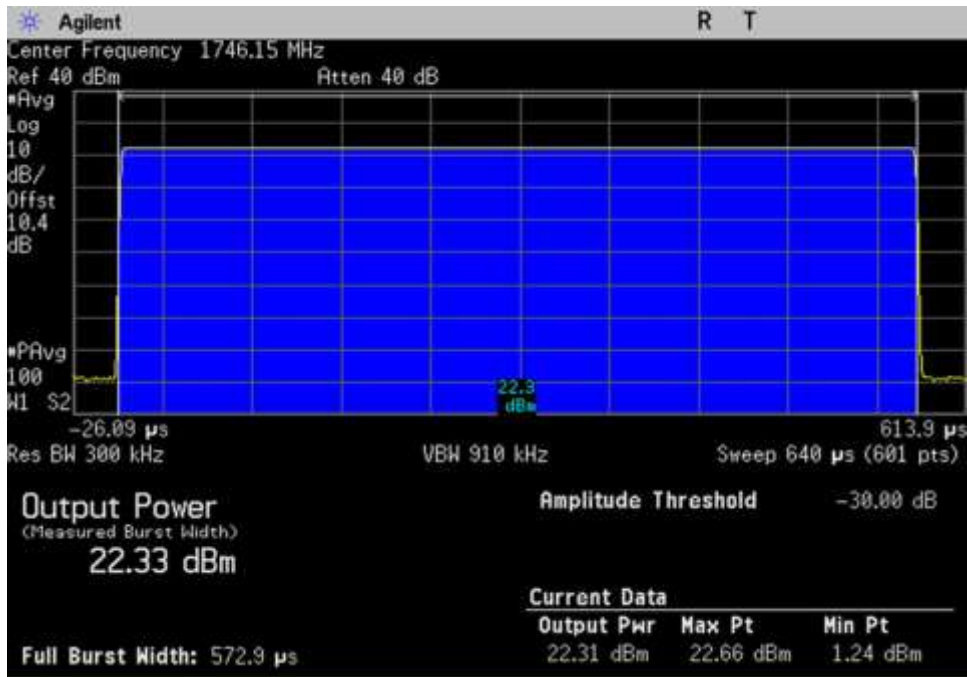


UL\_1710-1755\_GSM\_Max\_1746.15MHz

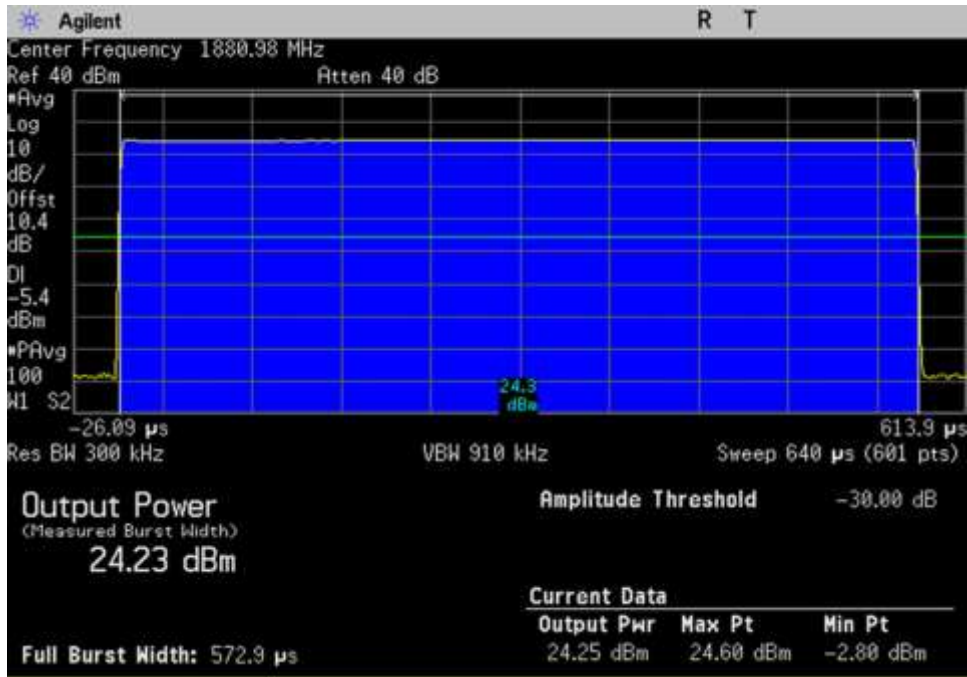


UL\_1850-1915\_GSM\_1880.98MHz

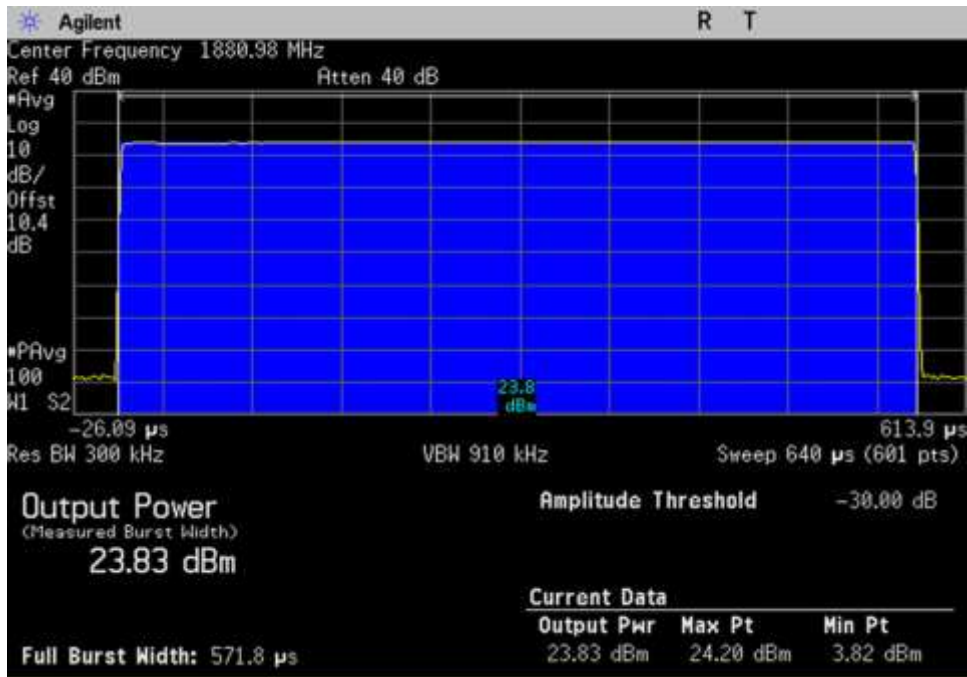


UL\_1850-1915\_GSM\_Max\_1880.98MHz

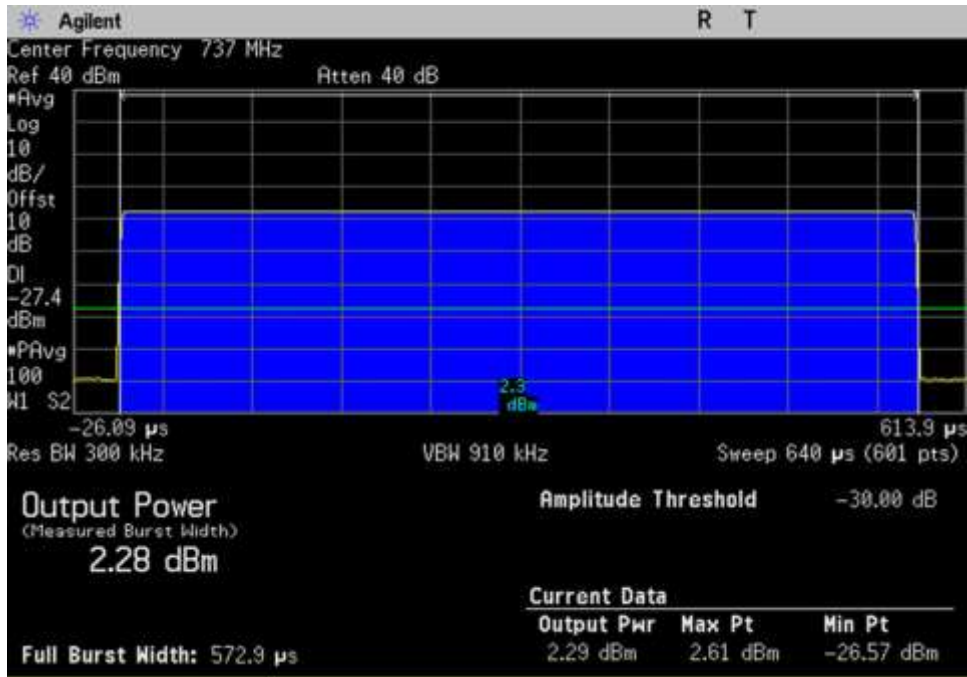


DL\_728-746\_GSM\_737MHz

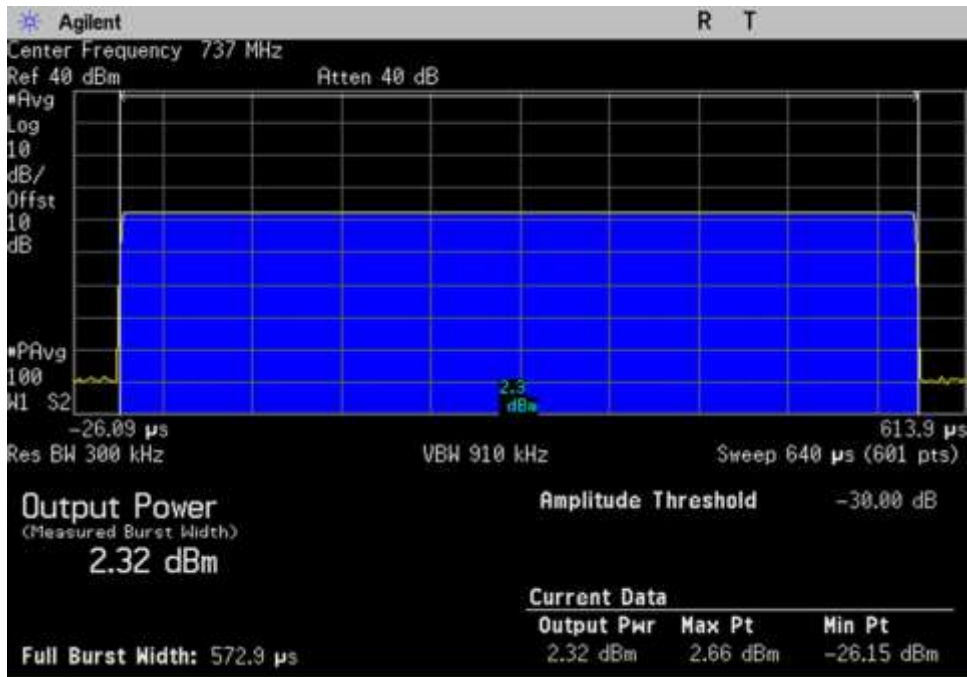

DL\_728-746\_GSM\_Max\_737MHz

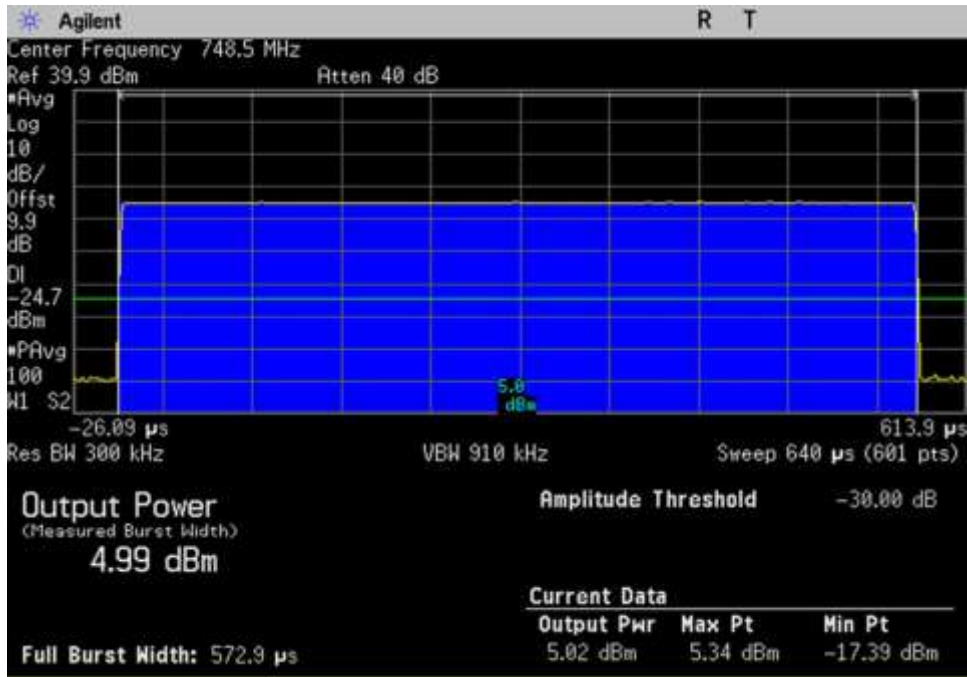


DL\_746-757\_GSM\_748.5MHz

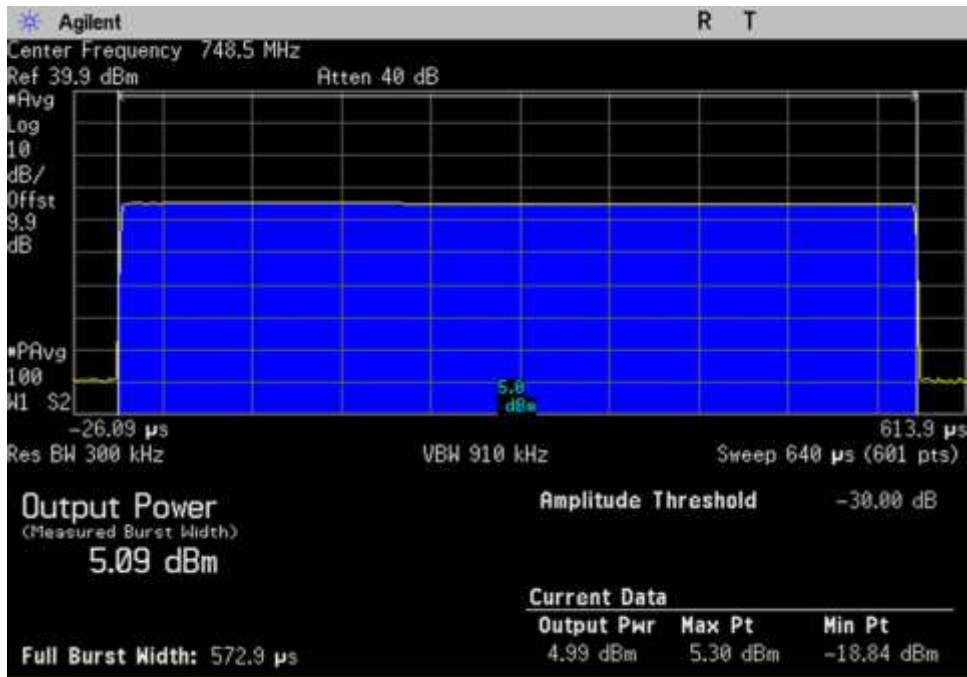


DL\_746-757\_GSM\_Max\_748.5MHz




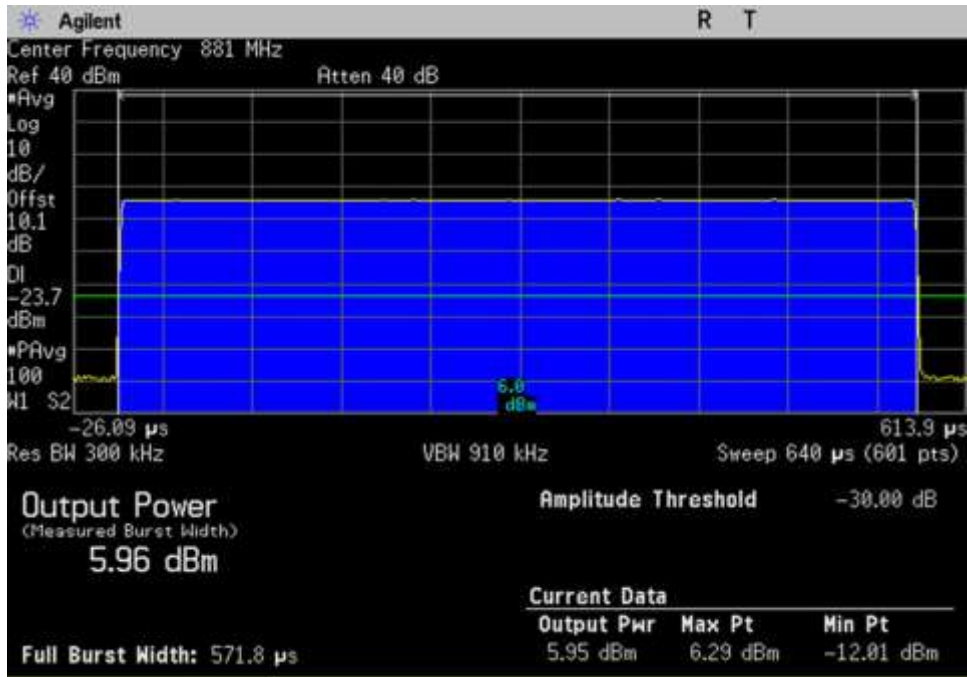


DL\_869-894\_GSM\_881MHz

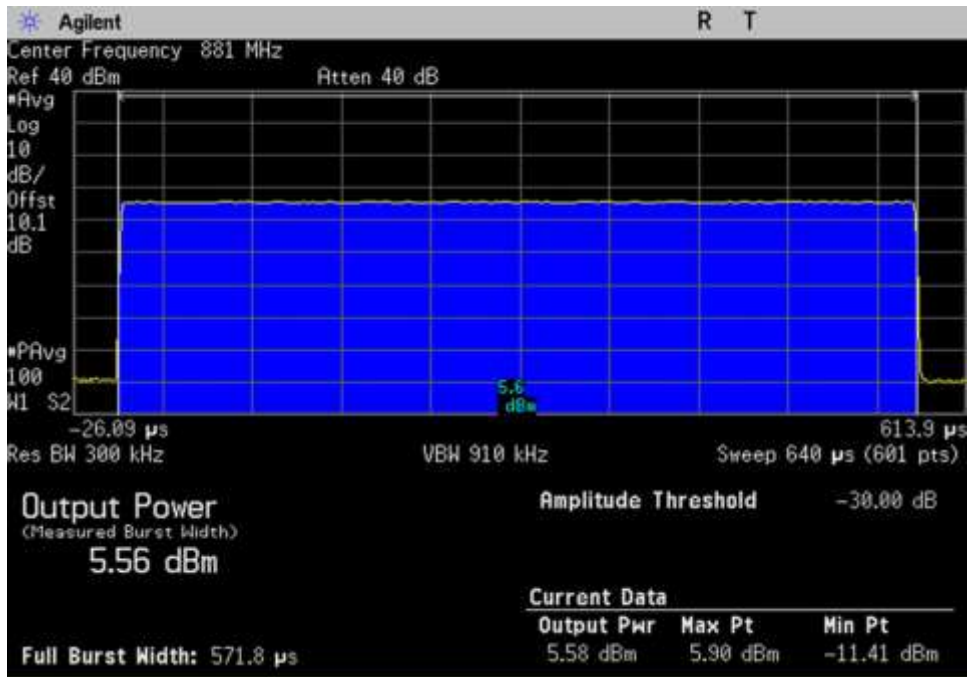


DL\_869-894\_GSM\_Max\_881MHz

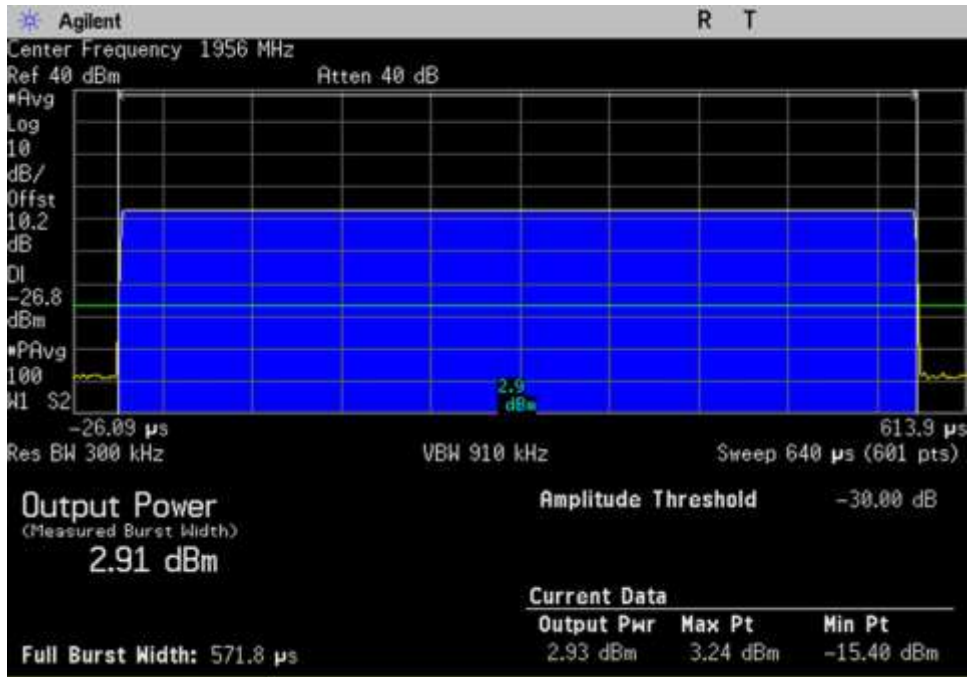


DL\_1930-1995\_GSM\_1956MHz

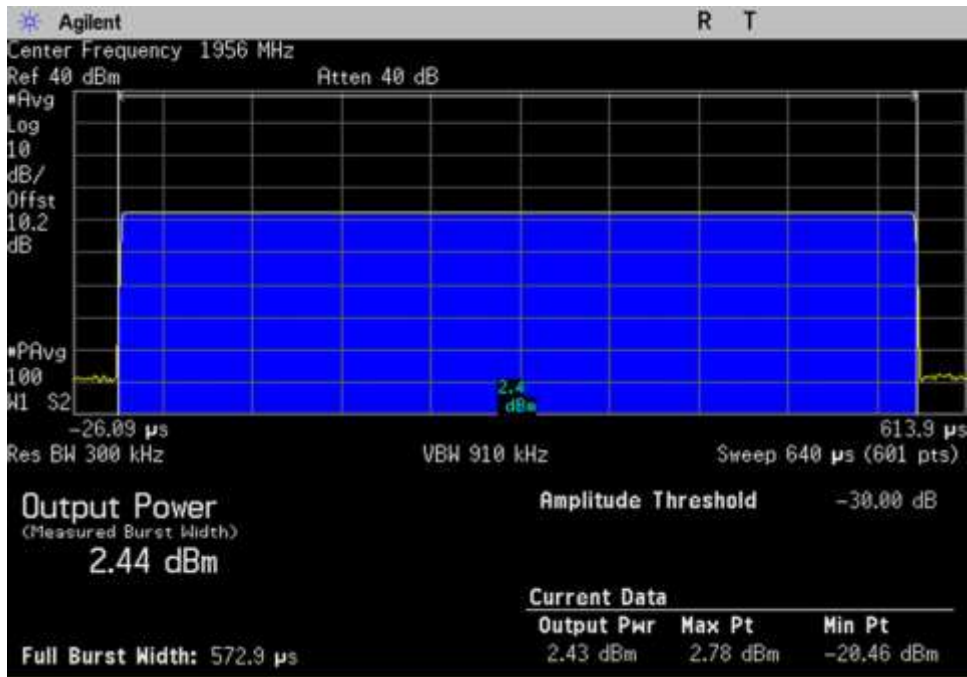

DL\_1930-1995\_GSM\_Max\_1956MHz

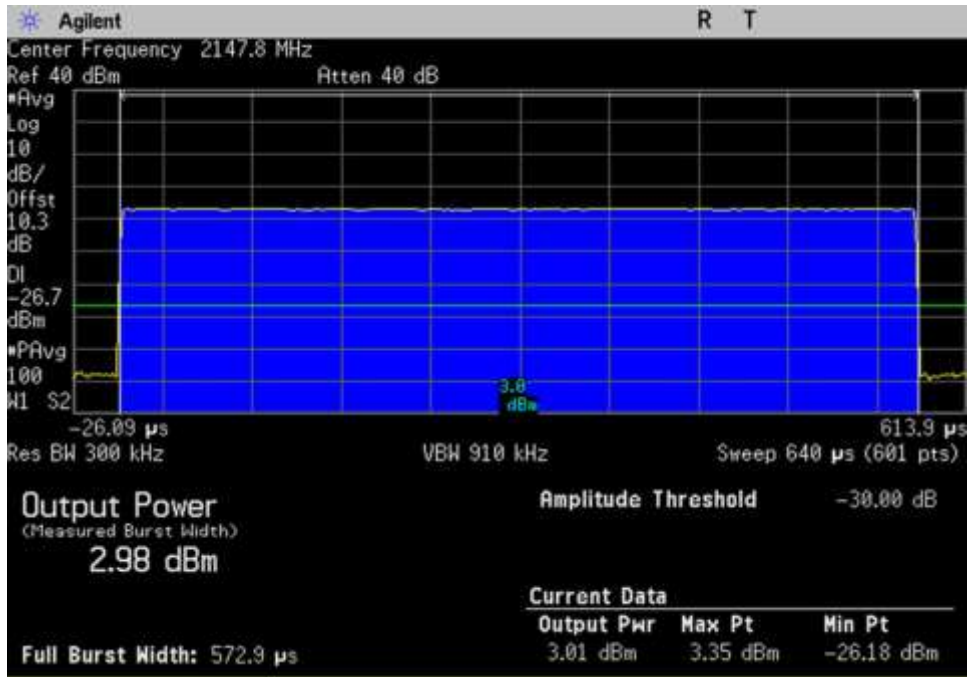

DL\_2110-2155\_GSM\_2147.8MHz

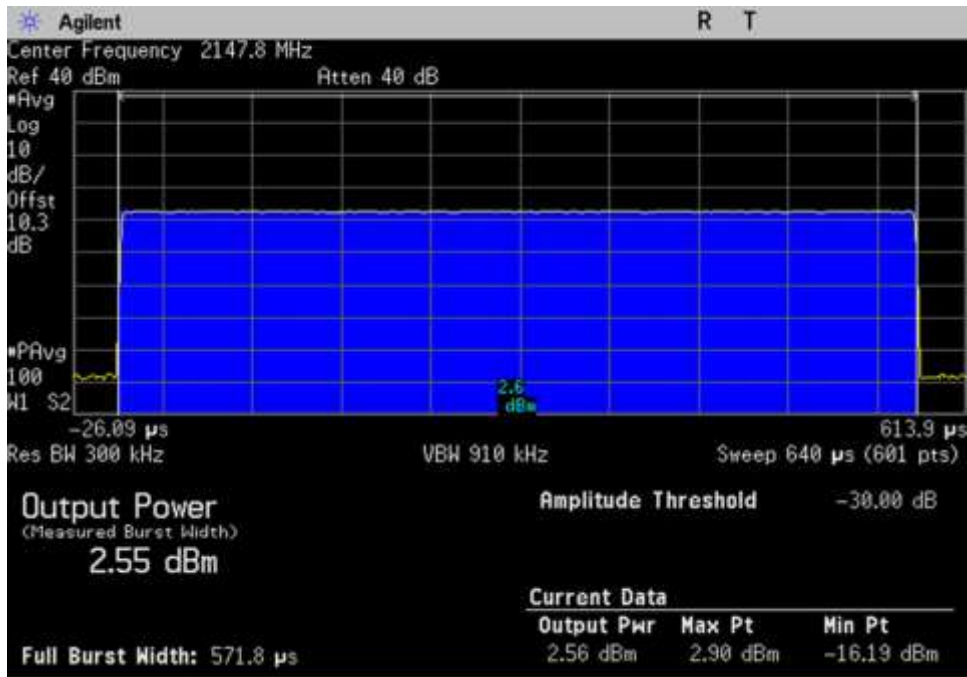

DL\_2110-2155\_GSM\_Max\_2147.8MHz



## 7.4 Intermodulation Product

### Test Conditions / Setup

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170  
 Customer: Cellphone-Mate, Inc.  
 Specification: **7.4 Intermodulation Product**  
 Work Order #: **102180** Date 01/21/2019  
 Test Type: **Conducted Emissions**  
 Tested By: **Hieu S. Nguyenpham**  
 Software: EMITest 5.03.11

**Equipment Tested:**

Device	Manufacturer	Model #	S/N
Configuration 1			

**Support Equipment:**

Device	Manufacturer	Model #	S/N
Configuration 1			

**Test Conditions / Notes:**

Test environment conditions: Temperature: 21.2°C, 46% relative humidity, Pressure: 101.6kPa

Modification #1 was in place during testing.

**Test Equipment:**

Asset #	Description	Manufacturer	Model	Calibration Date	Cal Due Date
P05411	Attenuator	Weinschel	54A-10	1/19/2018	1/19/2020
P07192	Cable	Astro	32022-29094K-29094K-48TC	10/9/2017	10/9/2019
P07191	Cable	Astro	32022-29094K-29094K-48TC	10/30/2017	10/30/2019
03418	Signal Generator	Agilent	E4438C	6/19/2017	6/19/2019
03471	Spectrum Analyzer	Agilent	E4440A	1/18/2018	1/18/2020


## Summary of Results

Pass: As shown on the plots, all intermodulation products are measured below -19dbm limit.


Inter Modulation Product			
Frequency (MHz)	Pre AGC (dBm)	Limit (dBm)	Results
UL 1710-1755	-20.8	-19	Pass
UL 1850-1915	-22.8	-19	Pass
UL 824-894	-20.3	-19	Pass
UL 698-716	-22.1	-19	Pass
UL 776-787	-19.8	-19	Pass
DL 2110-2155	-54.1	-19	Pass
DL 1930-1995	-53.7	-19	Pass
DL 869-894	-45.8	-19	Pass
DL 728-746	-45.4	-19	Pass
DL 746-757	-44.4	-19	Pass

Note: The EUT maintains compliance with the intermodulation limit at input power of AGC+10dB


## Plots

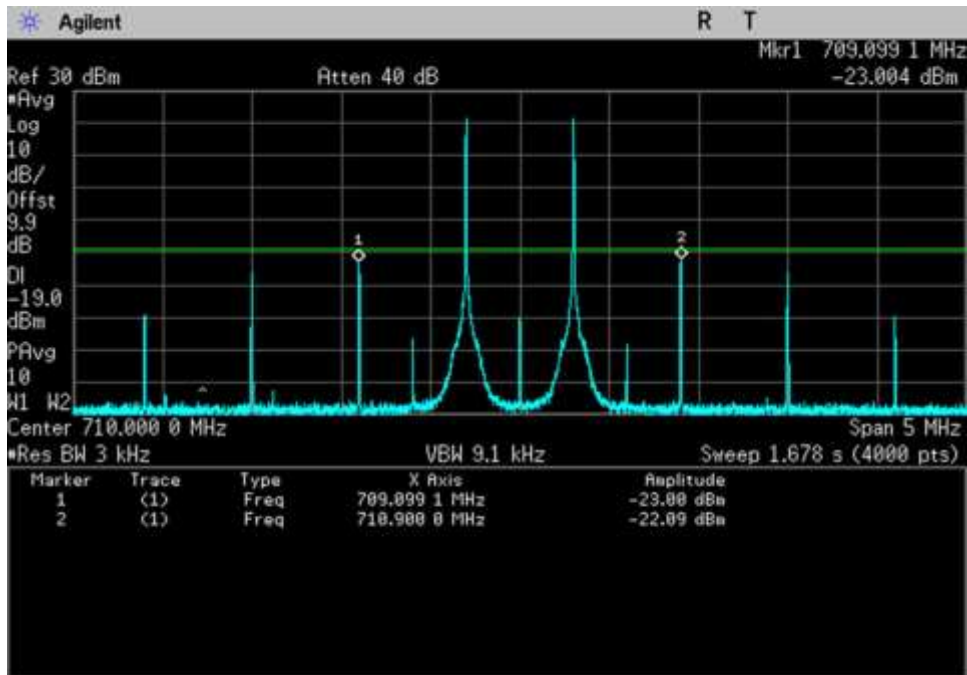


UL\_698-716\_710MHz

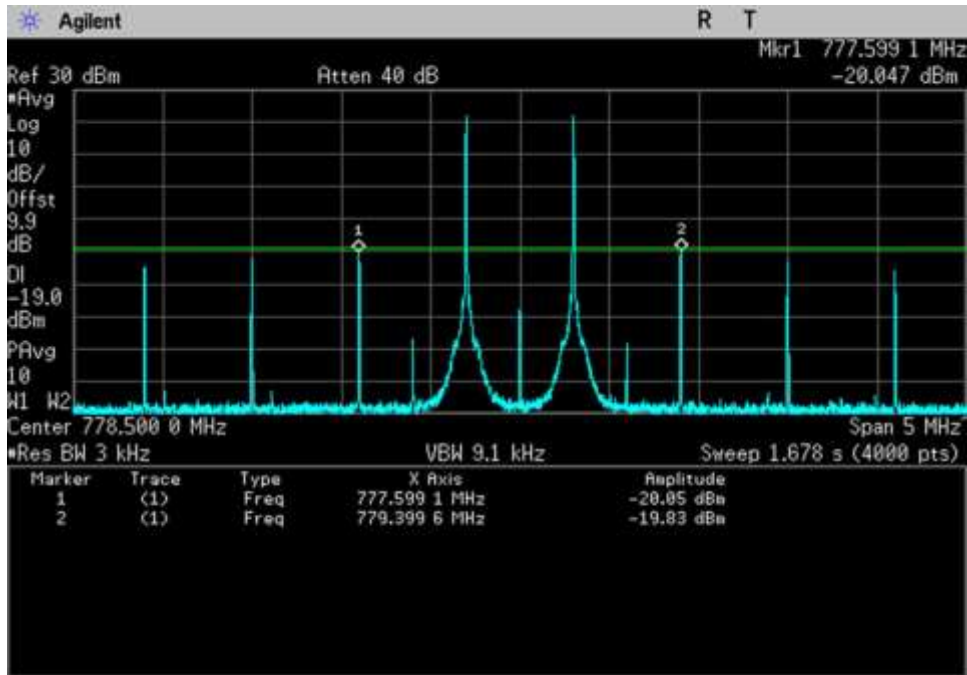


UL\_776-787\_ 778.5MHz

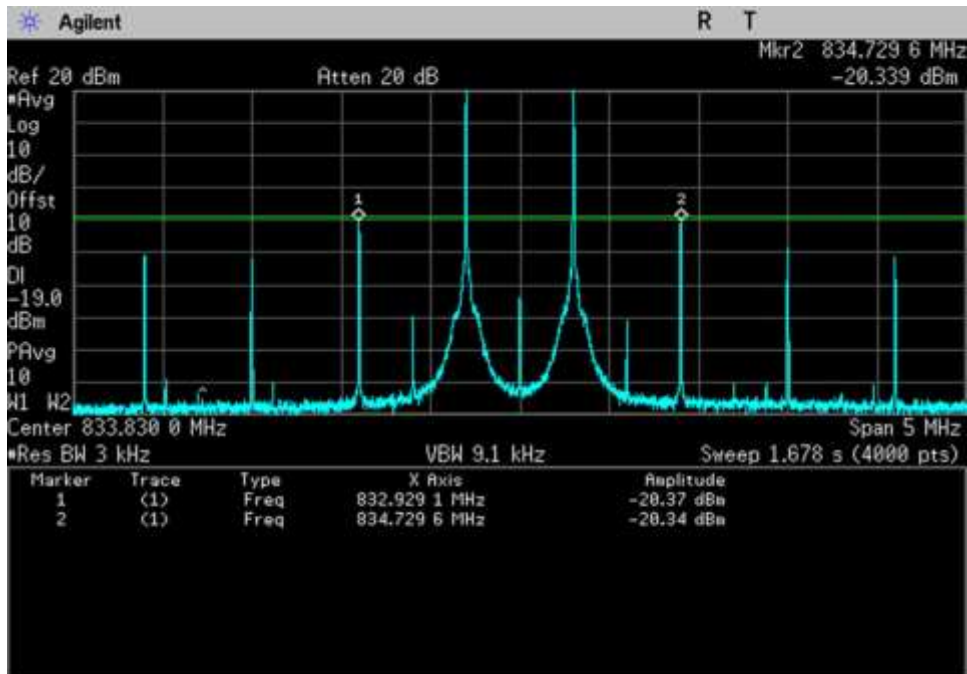


UL\_824-849\_ 833.83MHz

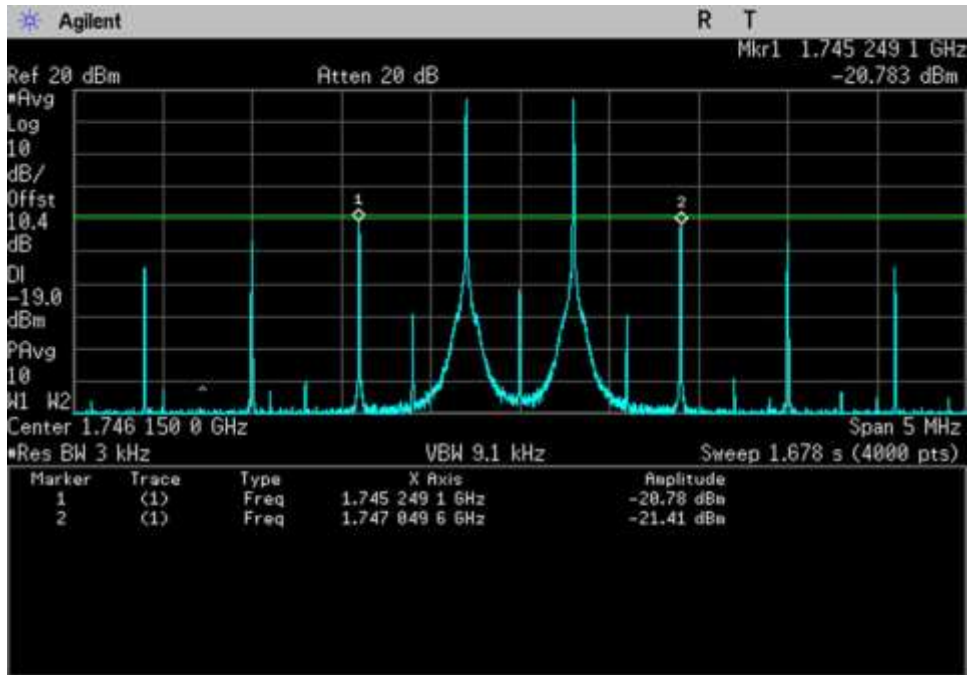


UL\_1710-1755\_ 1746.15MHz

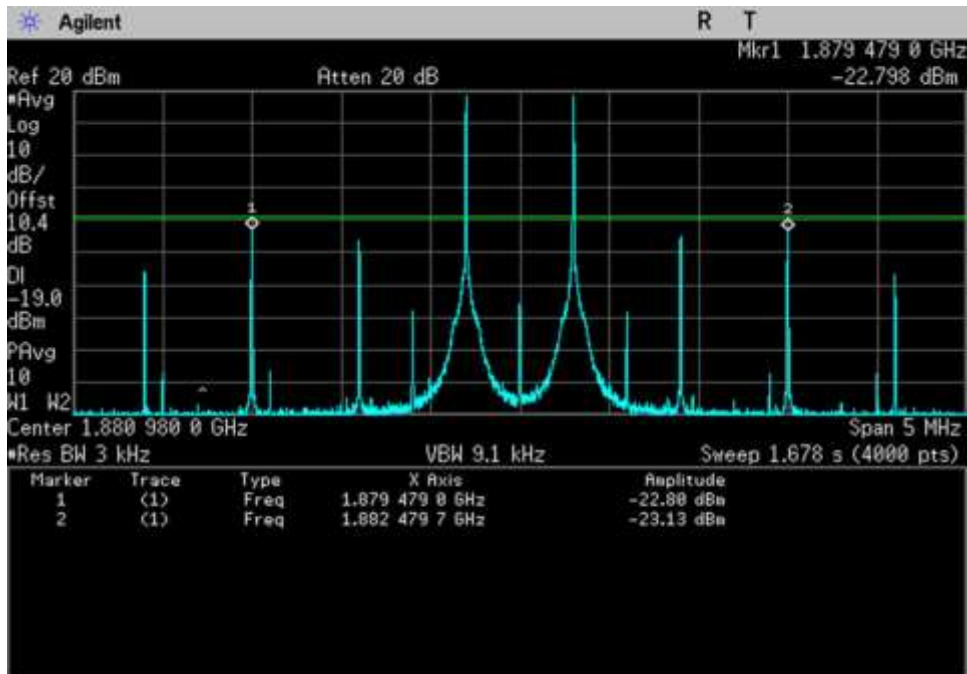


UL\_1850-1915\_ 1880.98MHz

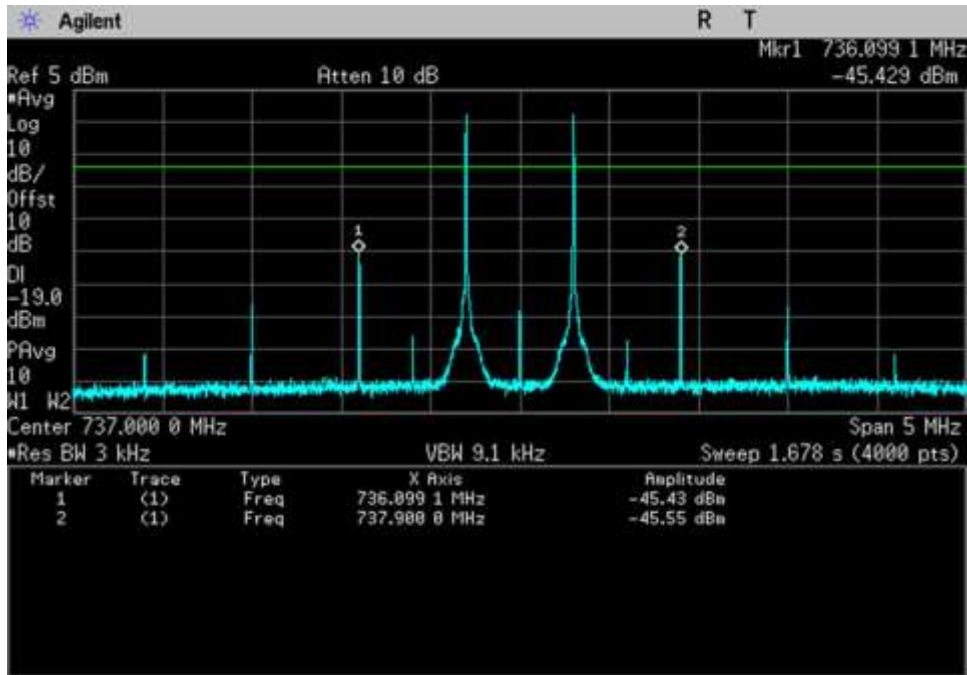


DL\_728-746\_737MHz

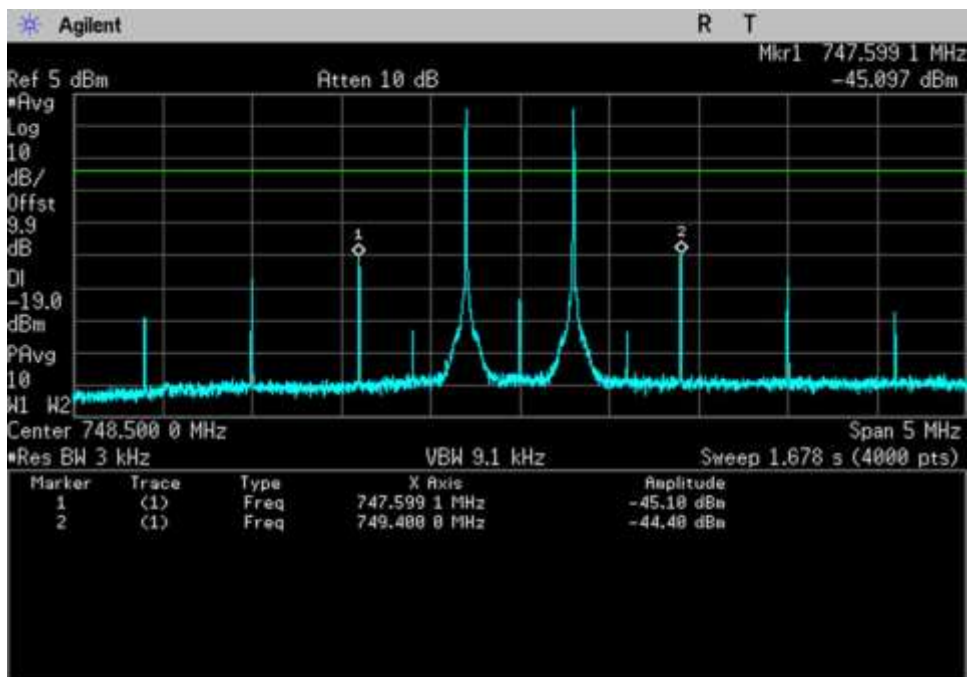


DL\_746-757\_748.5MHz

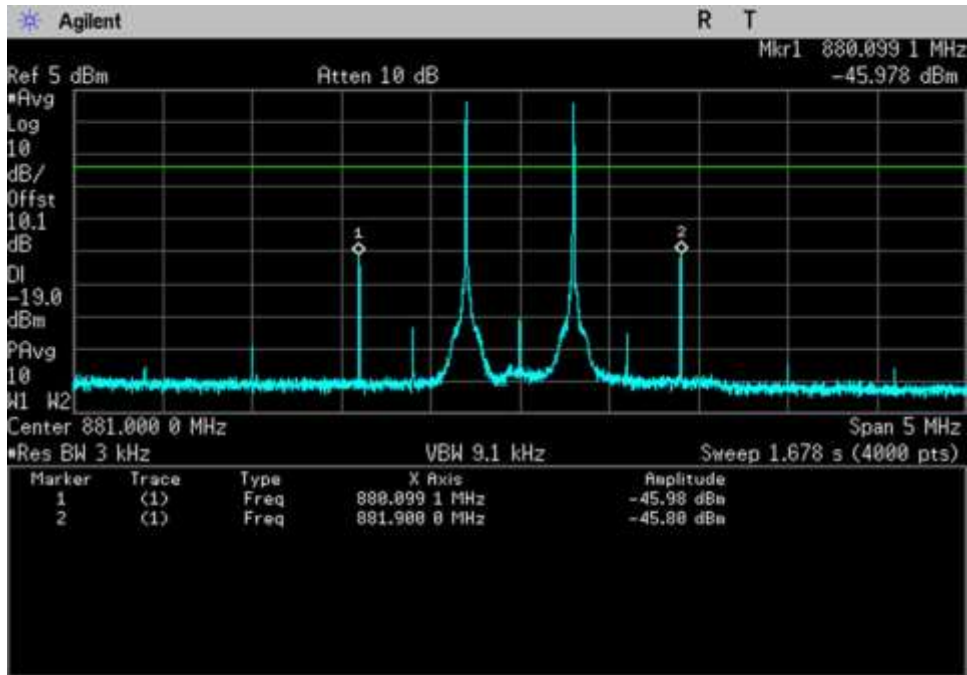

DL\_869-894\_881MHz

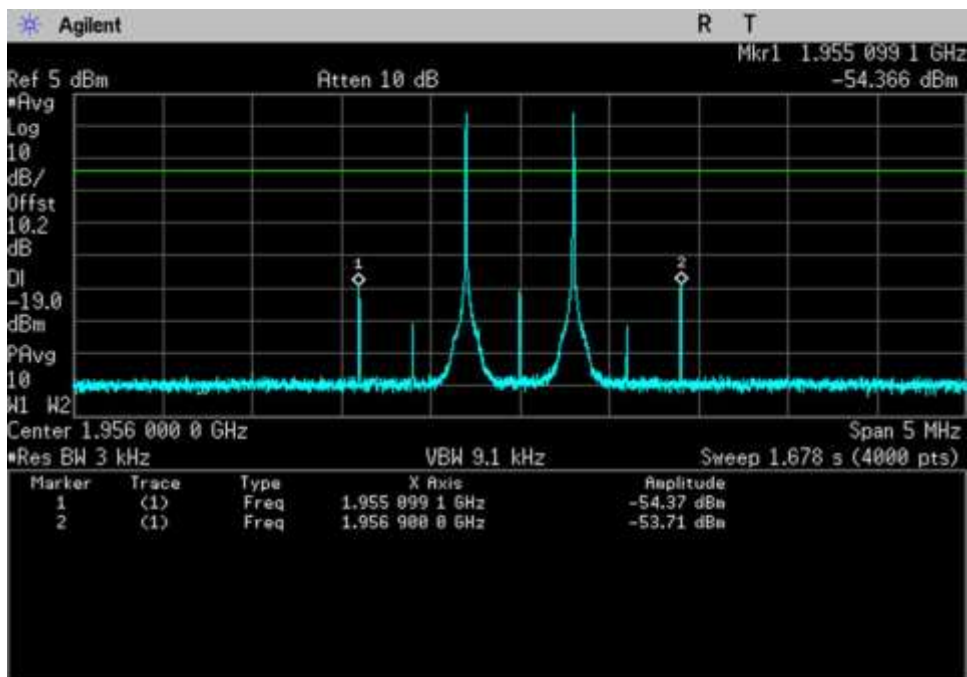

DL\_1930-1995\_1956MHz

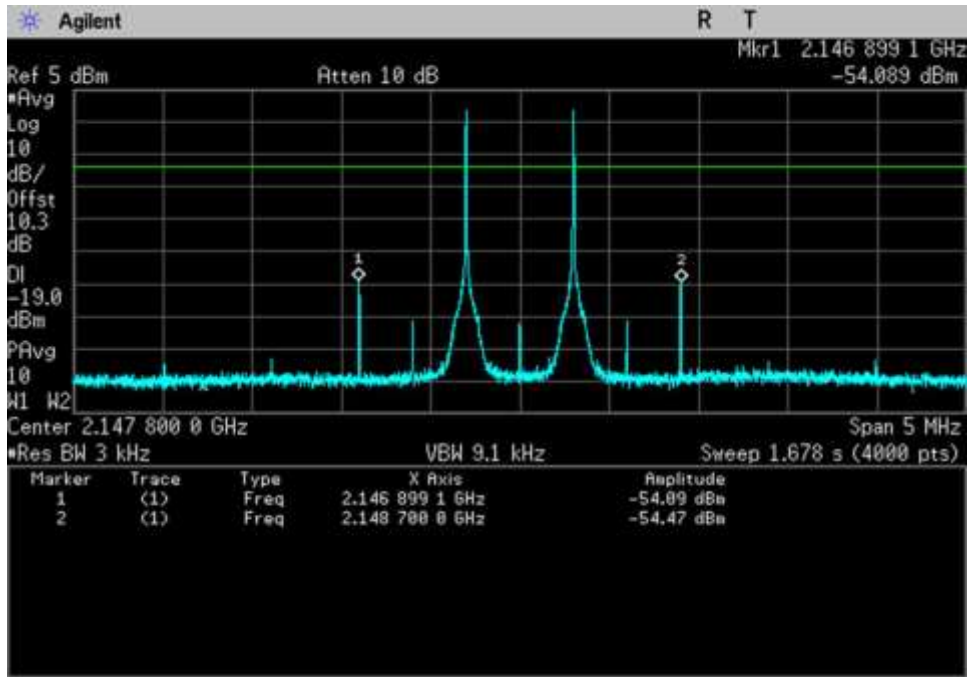

DL\_2110-2155\_2147.8MHz



## 7.5 Out of Band Emissions

### Test Conditions / Setup

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170  
 Customer: Cellphone-Mate, Inc.  
 Specification: **7.5 Out-of-band Emissions**  
 Work Order #: **102180** Date 01/22/2019 and 01/28/2019  
 Test Type: **Conducted Emissions**  
 Tested By: **Hieu Song Nguyenpham**  
 Software: EMITest 5.03.11

**Equipment Tested:**

Device	Manufacturer	Model #	S/N
Configuration 1			

**Support Equipment:**

Device	Manufacturer	Model #	S/N
Configuration 1			

**Test Conditions / Notes:**

01/22/2019: Test environment conditions: Temperature: 20.3°C, 36.4% relative humidity, Pressure: 102.5kPa  
 01/28/2019: Test environment conditions: Temperature: 20.5°C, 38% relative humidity, Pressure: 102.2kPa

Modification #1 was in place during testing.

**Test Equipment:**

Asset #	Description	Manufacturer	Model	Calibration Date	Cal Due Date
P05411	Attenuator	Weinschel	54A-10	1/19/2018	1/19/2020
P07192	Cable	Astro	32022-29094K-29094K-48TC	10/9/2017	10/9/2019
P07191	Cable	Astro	32022-29094K-29094K-48TC	10/30/2017	10/30/2019
03418	Signal Generator	Agilent	E4438C	6/19/2017	6/19/2019
03471	Spectrum Analyzer	Agilent	E4440A	1/18/2018	1/18/2020



## Summary of Results

Pass: As indicated in plots below, all OBE are under the limit of -19dBm.

### GSM

Low				High			
Out of Band Emission				Out of Band Emission			
Frequency (MHz)	Pre AGC	Limit (dBm)	Results	Frequency (MHz)	Pre AGC	Limit (dBm)	Result
UL1710-1755	-25.1	-19	Pass	UL1710-1755	-25.3	-19	Pass
UL1850-1915	-25.6	-19	Pass	UL1850-1915	-29.0	-19	Pass
UL824-849	-19.7	-19	Pass	UL824-849	-20.5	-19	Pass
UL 698-716	-19.4	-19	Pass	UL 698-716	-21.3	-19	Pass
UL776-787	-19.1	-19	Pass	UL776-787	-20.3	-19	Pass
DL2110-2155	-44.7	-19	Pass	DL2110-2155	-43.9	-19	Pass
DL1930-1995	-46.3	-19	Pass	DL1930-1995	-43.9	-19	Pass
DL869-894	-41.2	-19	Pass	DL869-894	-39.1	-19	Pass
DL:728-746	-47.7	-19	Pass	DL:728-746	-42.9	-19	Pass
DL 746-757	-43.0	-19	Pass	DL 746-757	-43.7	-19	Pass

### CDMA (alternative 1.25 MHz AWGN)

Low				High			
Out of Band Emission				Out of Band Emission			
Frequency (MHz)	Pre AGC	Limit (dBm)	Results	Frequency (MHz)	Pre AGC	Limit (dBm)	Result
UL1710-1755	-19.7	-19	Pass	UL1710-1755	-19.2	-19	Pass
UL1850-1915	-19.8	-19	Pass	UL1850-1915	-24.8	-19	Pass
UL824-849	-21.1	-19	Pass	UL824-849	-19.6	-19	Pass
UL 698-716	-21.7	-19	Pass	UL 698-716	-26.6	-19	Pass
UL776-787	-20.7	-19	Pass	UL776-787	-21.0	-19	Pass
DL2110-2155	-61.4	-19	Pass	DL2110-2155	-61.3	-19	Pass
DL1930-1995	-60.7	-19	Pass	DL1930-1995	-59.6	-19	Pass
DL869-894	-53.6	-19	Pass	DL869-894	-53.2	-19	Pass
DL:728-746	-63.7	-19	Pass	DL:728-746	-59.0	-19	Pass
DL 746-757	-59.9	-19	Pass	DL 746-757	-60.3	-19	Pass


**LTE (alternative 4.1MHz AWGN)**

Low				High			
Out of Band Emission				Out of Band Emission			
Frequency (MHz)	Pre AGC	Limit (dBm)	Results	Frequency (MHz)	Pre AGC	Limit (dBm)	Results
UL1710-1755	-25.0	-19	Pass	UL1710-1755	-19.1	-19	Pass
UL1850-1915	-21.0	-19	Pass	UL1850-1915	-19.6	-19	Pass
UL824-849	-25.5	-19	Pass	UL824-849	-24.8	-19	Pass
UL 698-716	-27.7	-19	Pass	UL 698-716	-30.4	-19	Pass
UL776-787	-26.0	-19	Pass	UL776-787	-29.2	-19	Pass
DL2110-2155	-52.6	-19	Pass	DL2110-2155	-52.2	-19	Pass
DL1930-1995	-53.3	-19	Pass	DL1930-1995	-52.0	-19	Pass
DL869-894	-51.6	-19	Pass	DL869-894	-48.3	-19	Pass
DL:728-746	-61.3	-19	Pass	DL:728-746	-52.0	-19	Pass
DL 746-757	-48.0	-19	Pass	DL 746-757	-57.3	-19	Pass


Note: The EUT also maintains compliance with the out-of-band emissions limit at input power indicated in section 5.5.

**Plots**


**CDMA**

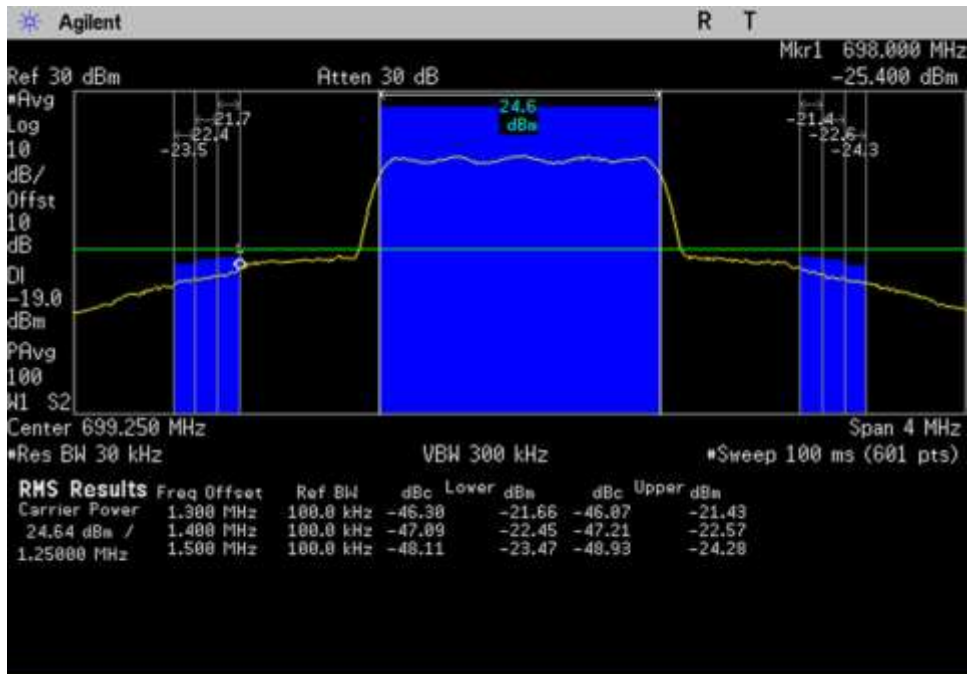


UL\_698-716\_CDMA\_697.25- 701.25MHz

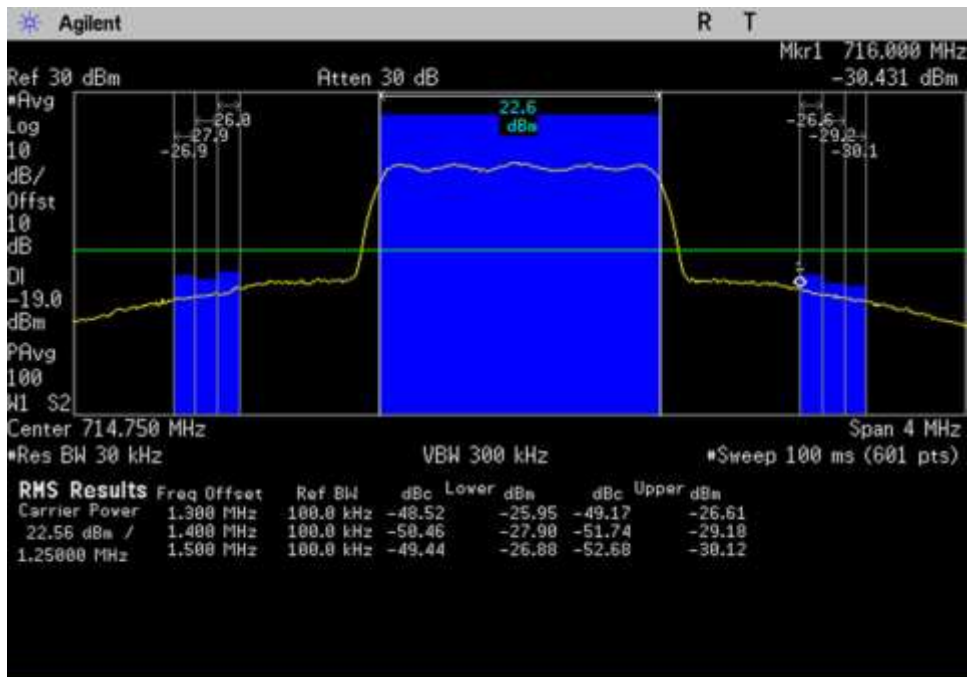


UL\_698-716\_CDMA\_712.75- 716.75MHz

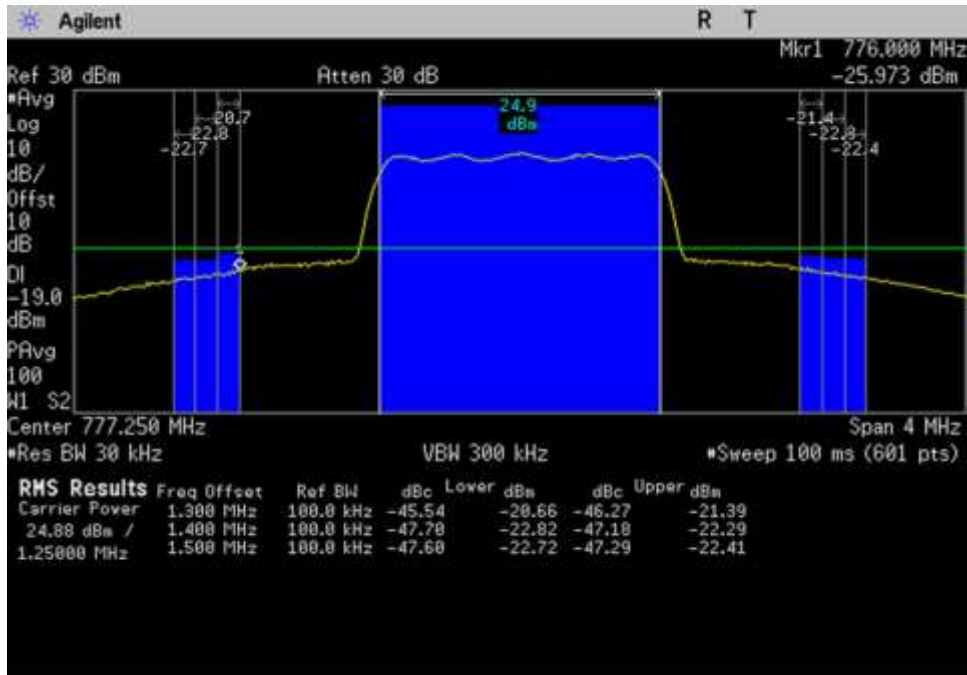


UL\_776-787\_CDMA\_775.25-779.25MHz

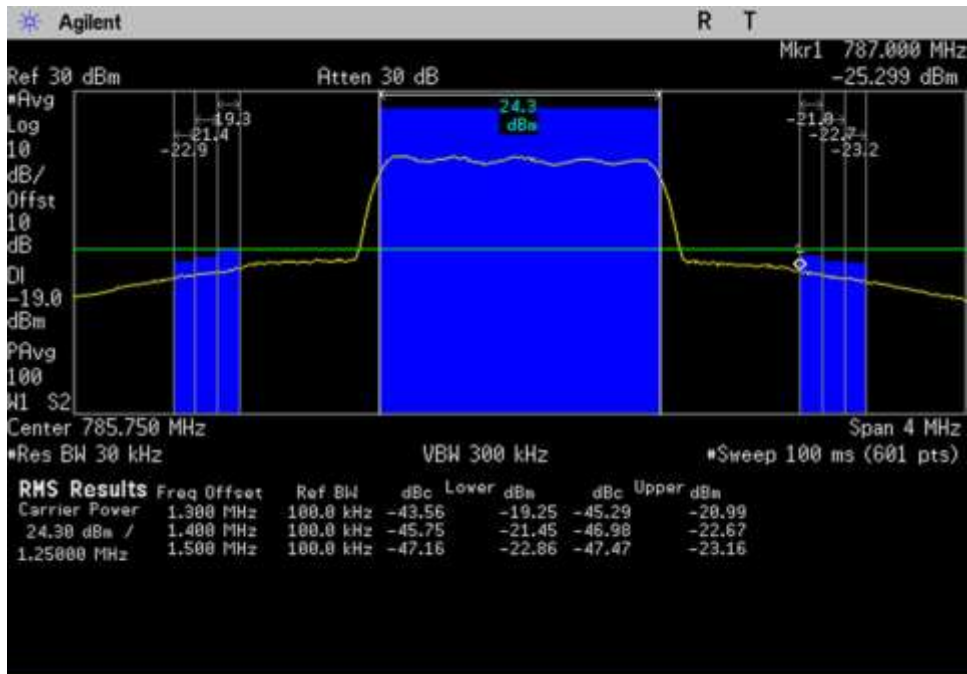


UL\_776-787\_CDMA\_783.75-787.75MHz

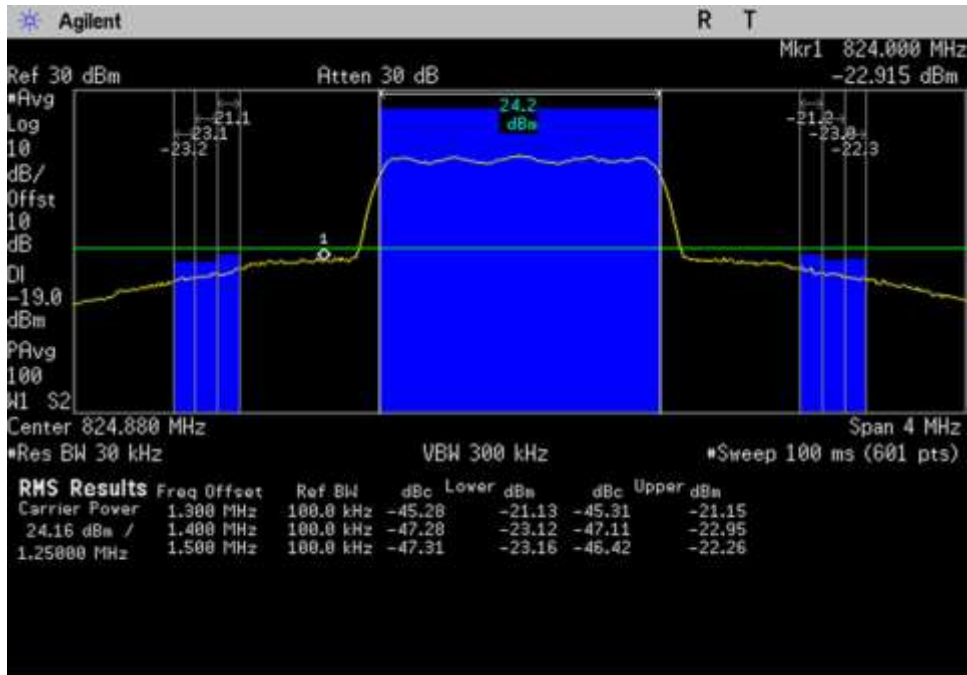


UL\_824-849\_CDMA\_ 822.88- 826.88MHz

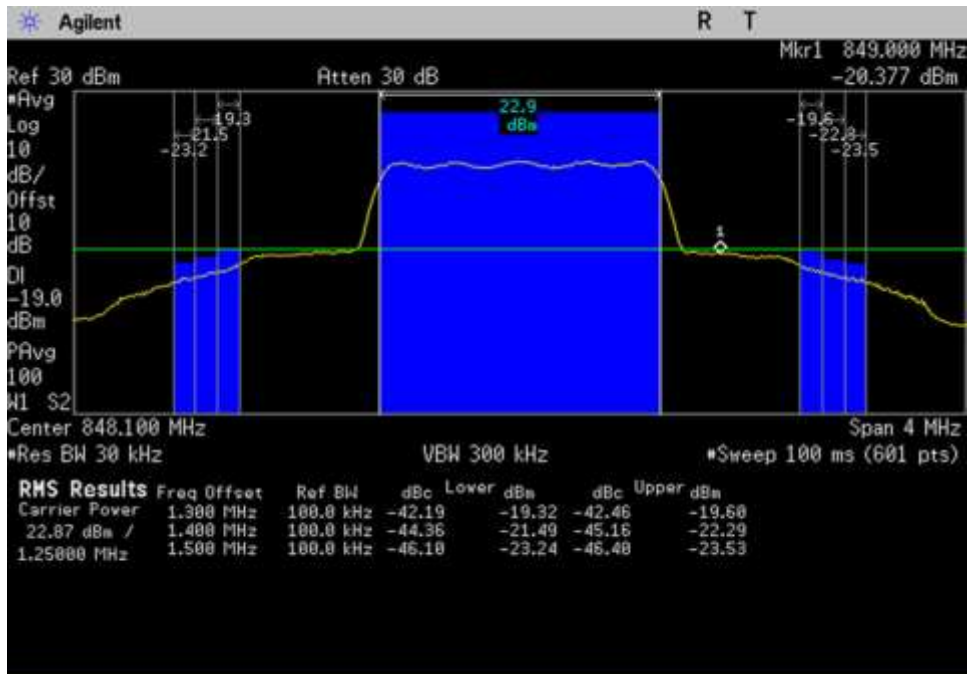


UL\_824-849\_CDMA\_ 846.1- 850.1MHz

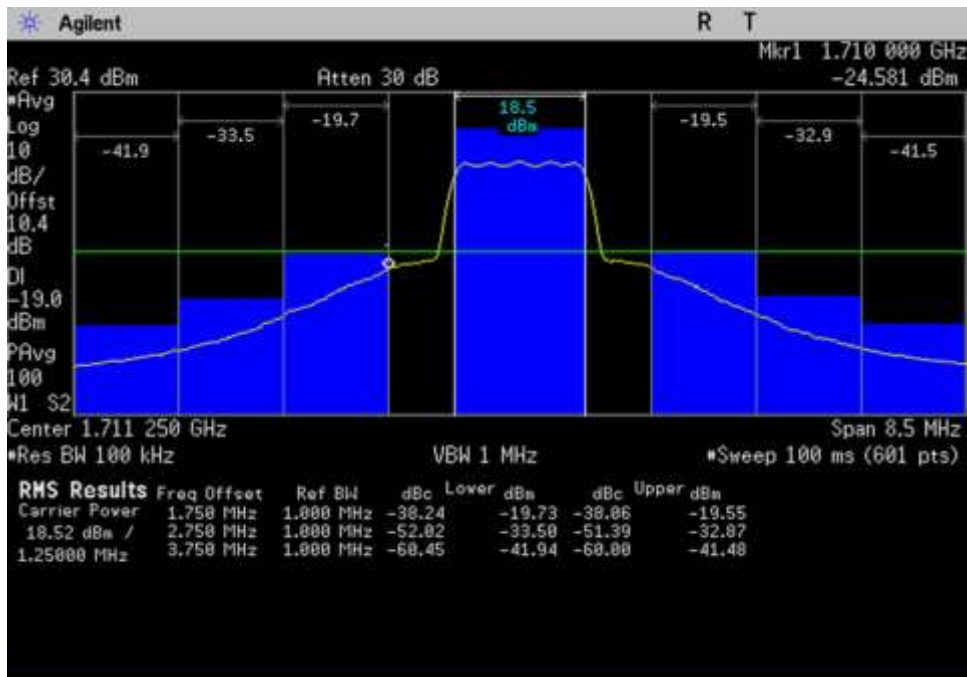


UL\_1710-1755\_CDMA\_1707-1715.5MHz

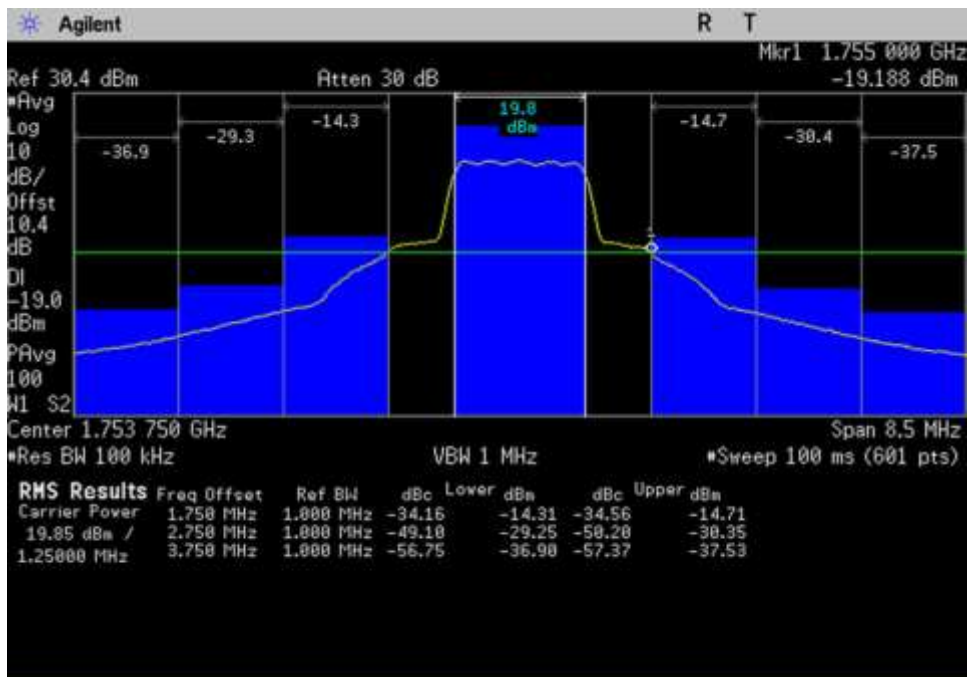

UL\_1710-1755\_CDMA\_1749.5-1758MHz

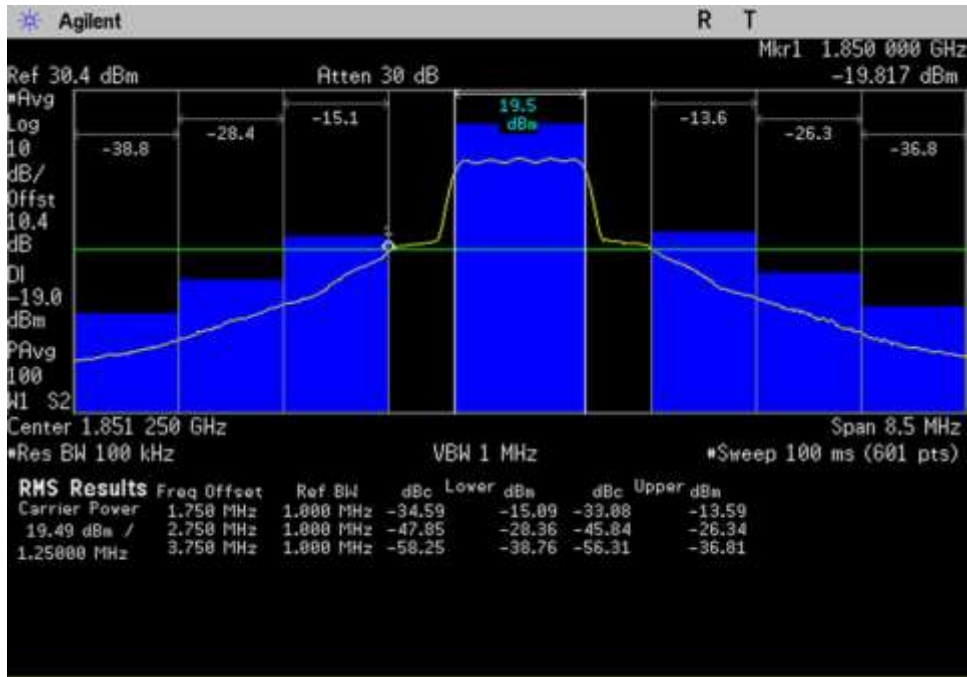


UL\_1850-1915\_CDMA\_1847-1855.5MHz

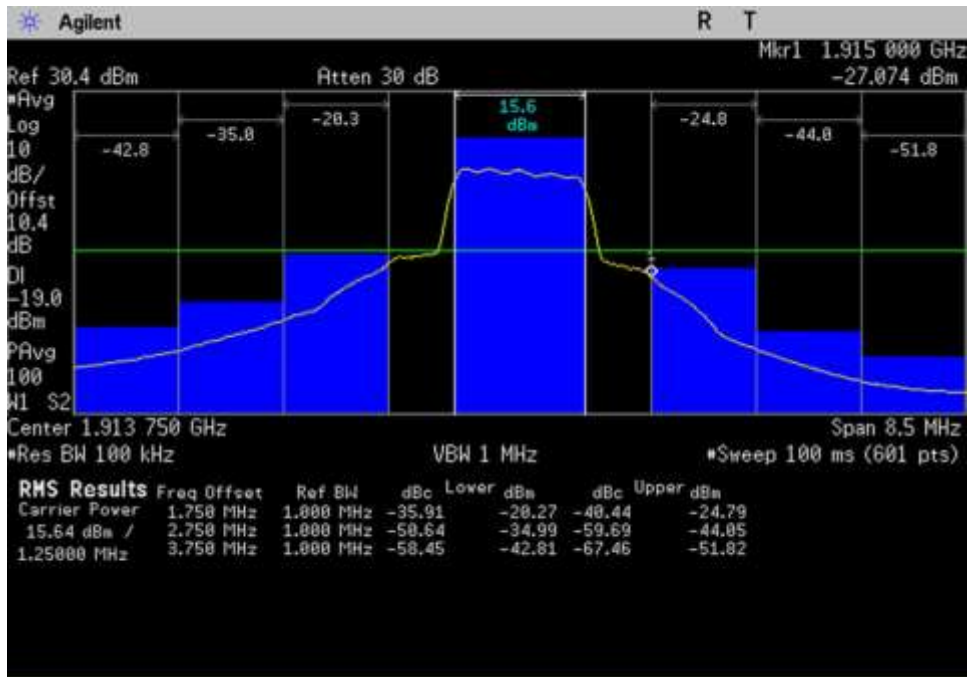


UL\_1850-1915\_CDMA\_1909.5-1918MHz



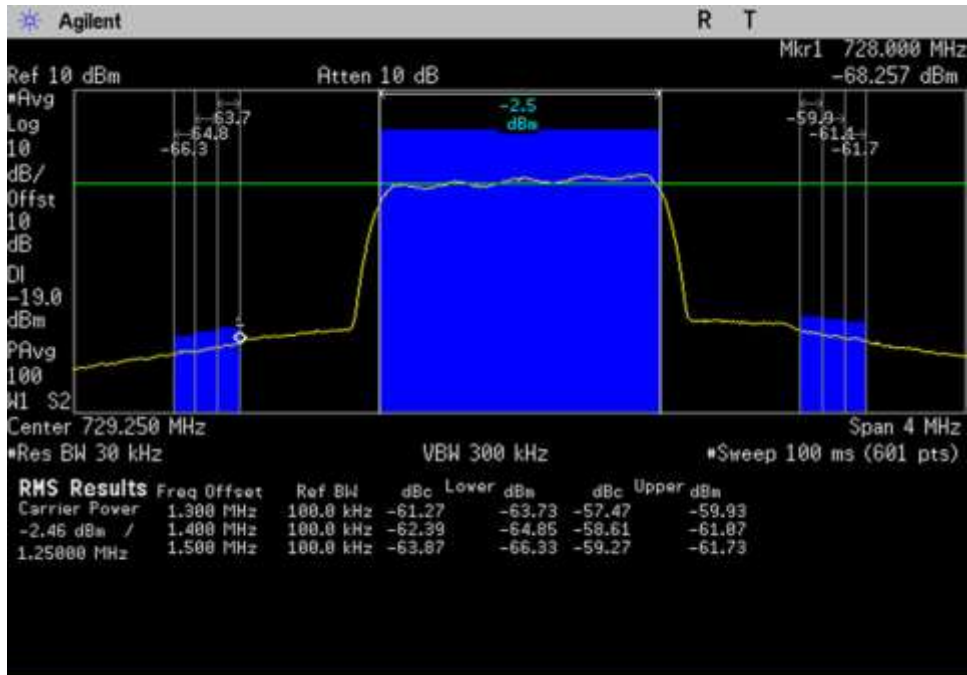


DL\_728-746\_CDMA\_727.25-731.25MHz

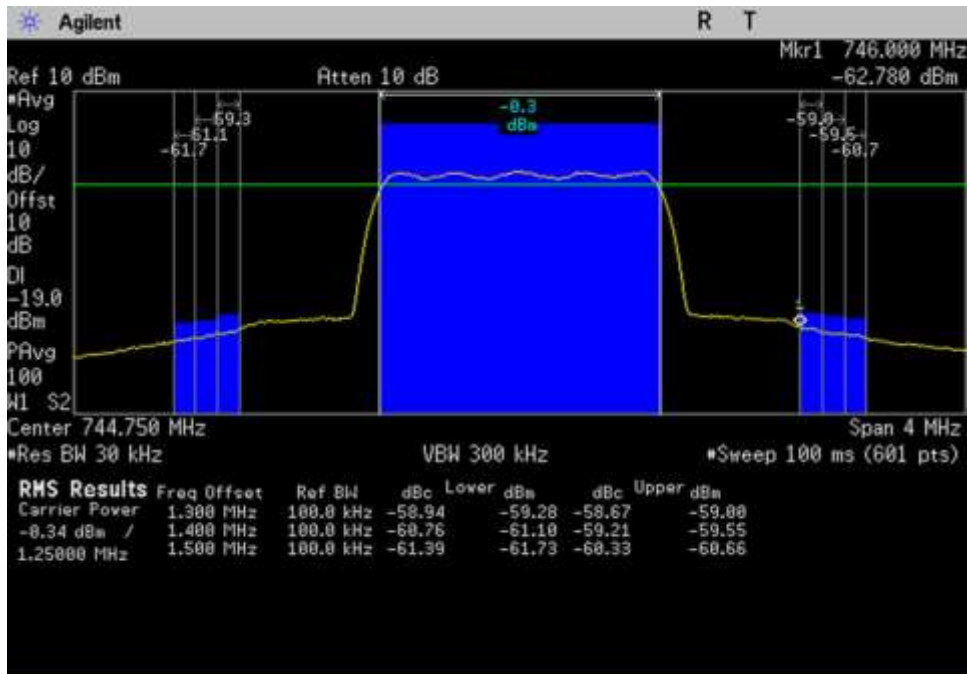


DL\_728-746\_CDMA\_742.75-746.75MHz




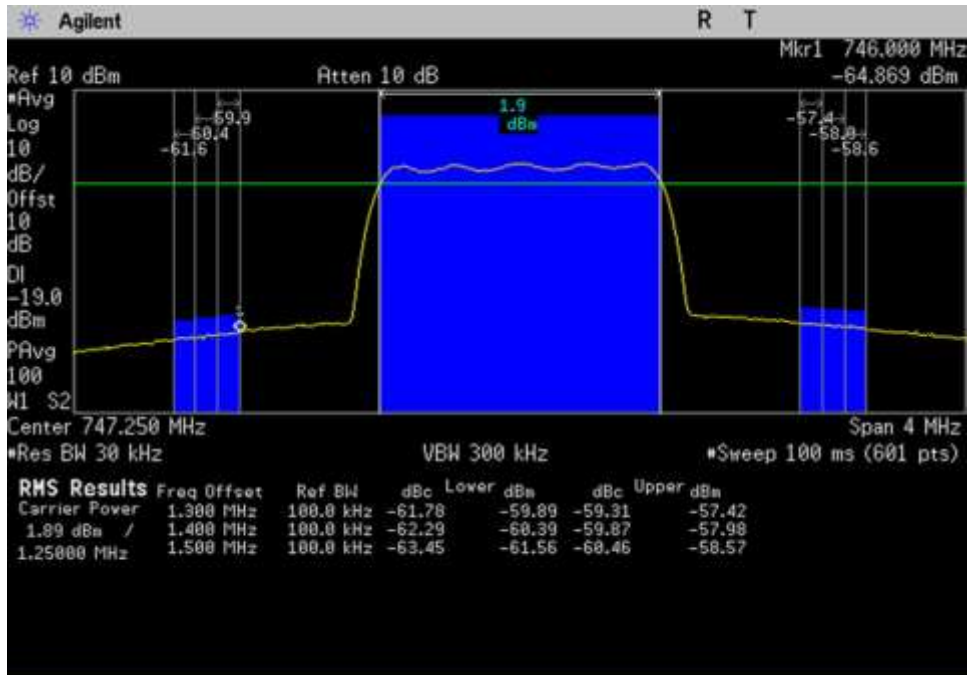


DL\_746-757\_CDMA\_745.25-749.25MHz

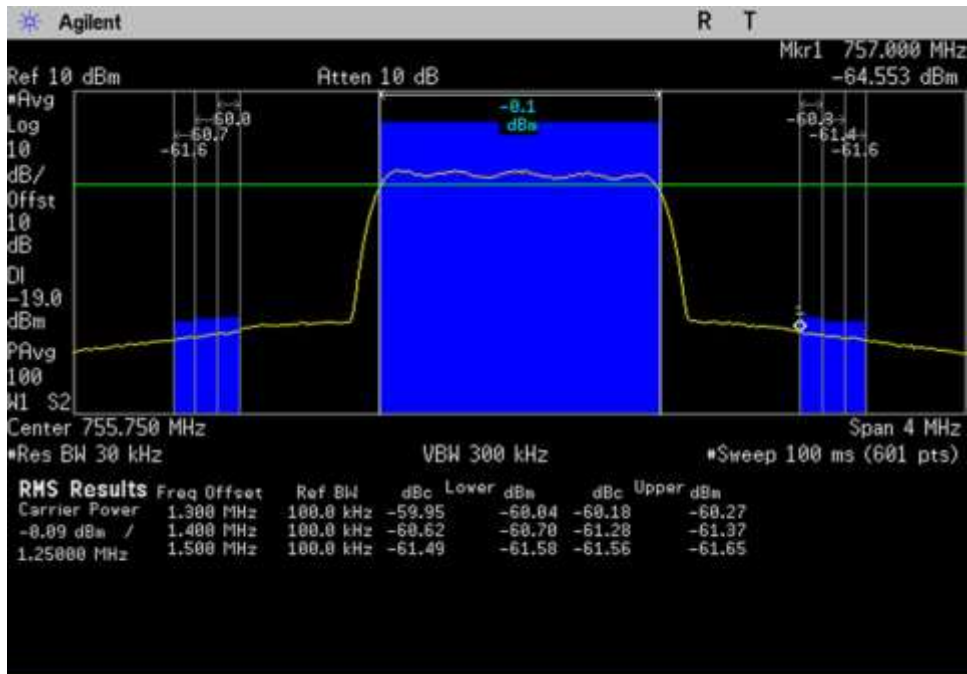


DL\_746-757\_CDMA\_753.75-757.75MHz

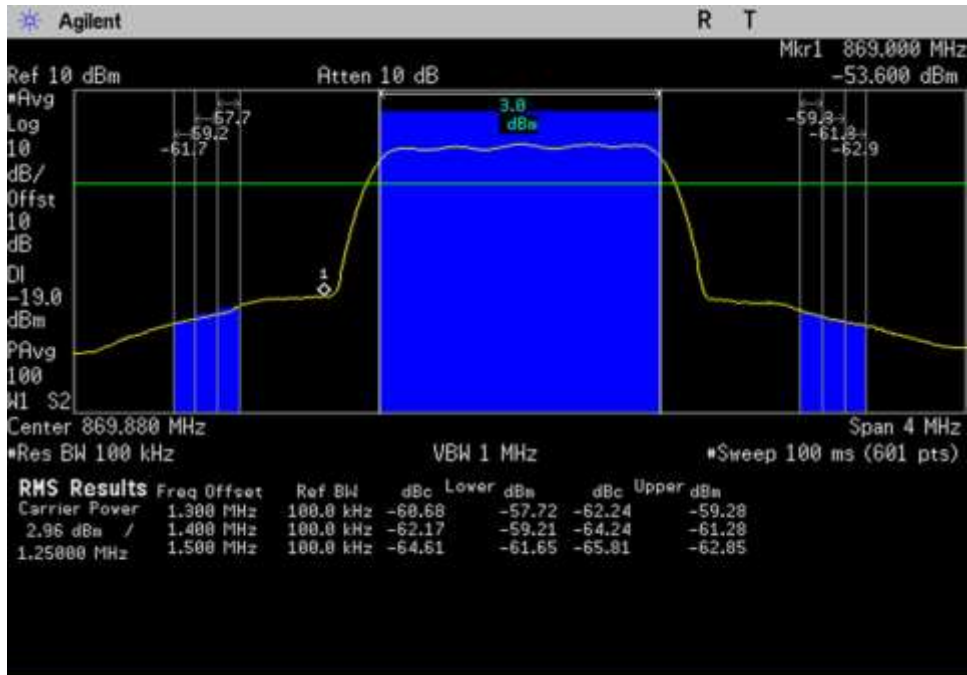


DL\_869-894\_CDMA\_867.88-871.88MHz

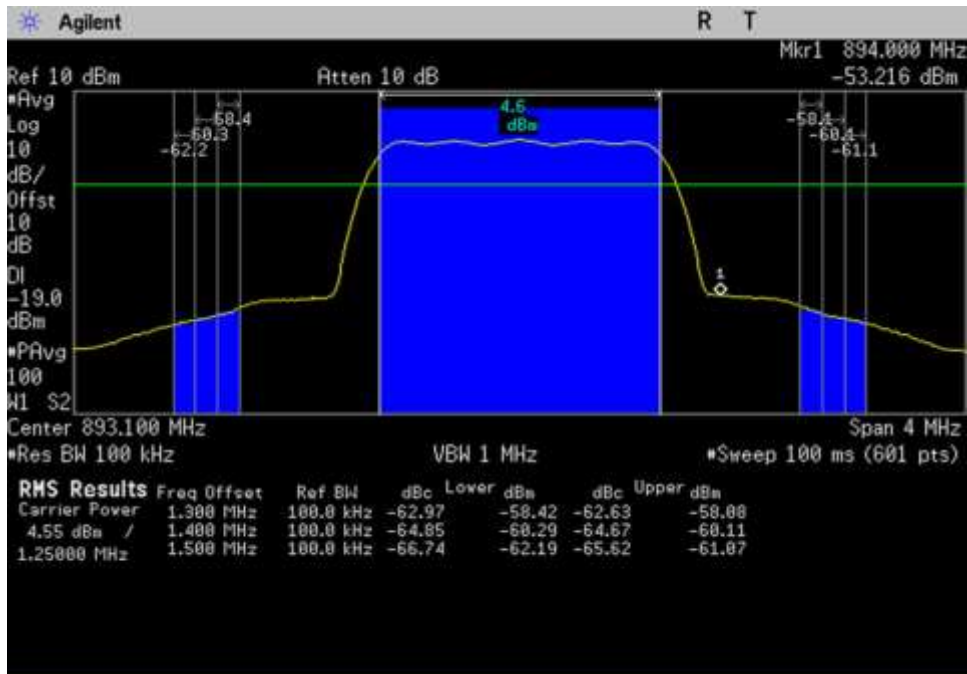


DL\_869-894\_CDMA\_891.1-895.1MHz

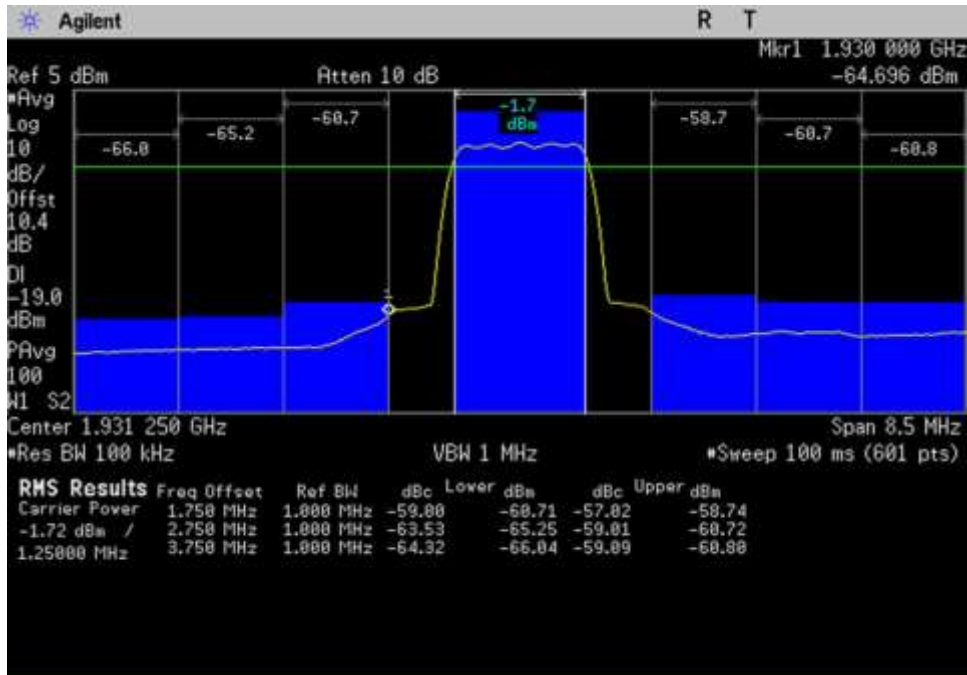


DL\_1930-1995\_CDMA\_1927-1935.5MHz

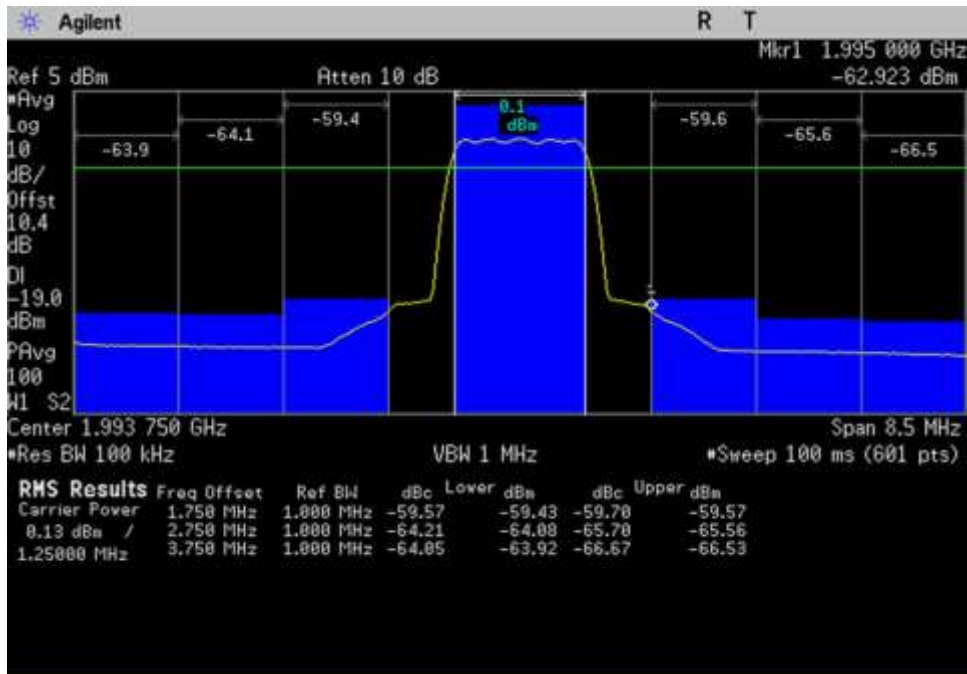

DL\_1930-1995\_CDMA\_1989.5-1998MHz

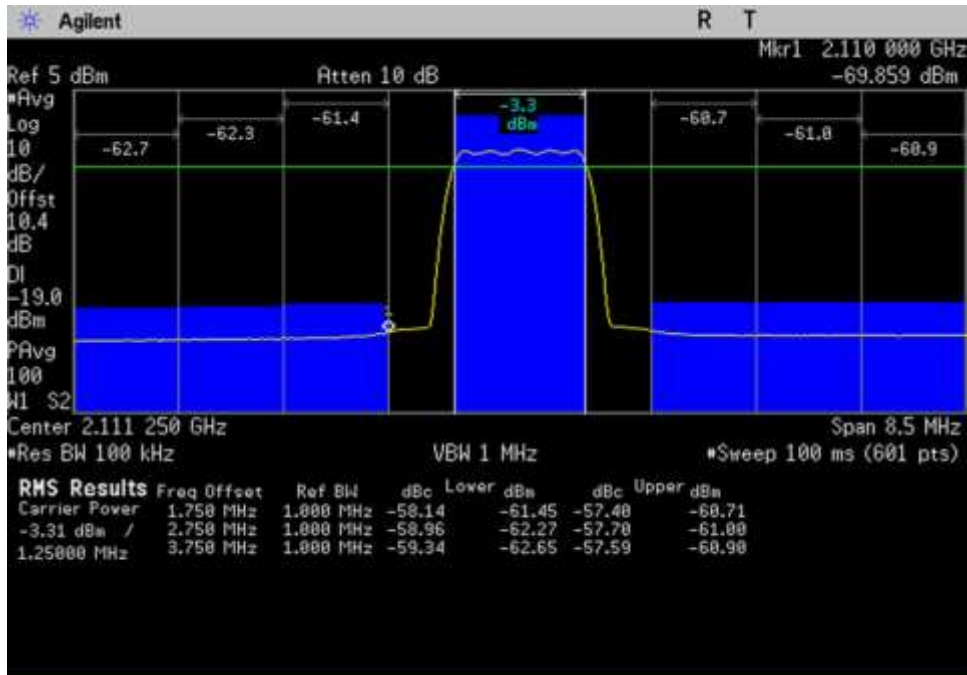


DL\_2110-2155\_CDMA\_2107-2115.5MHz

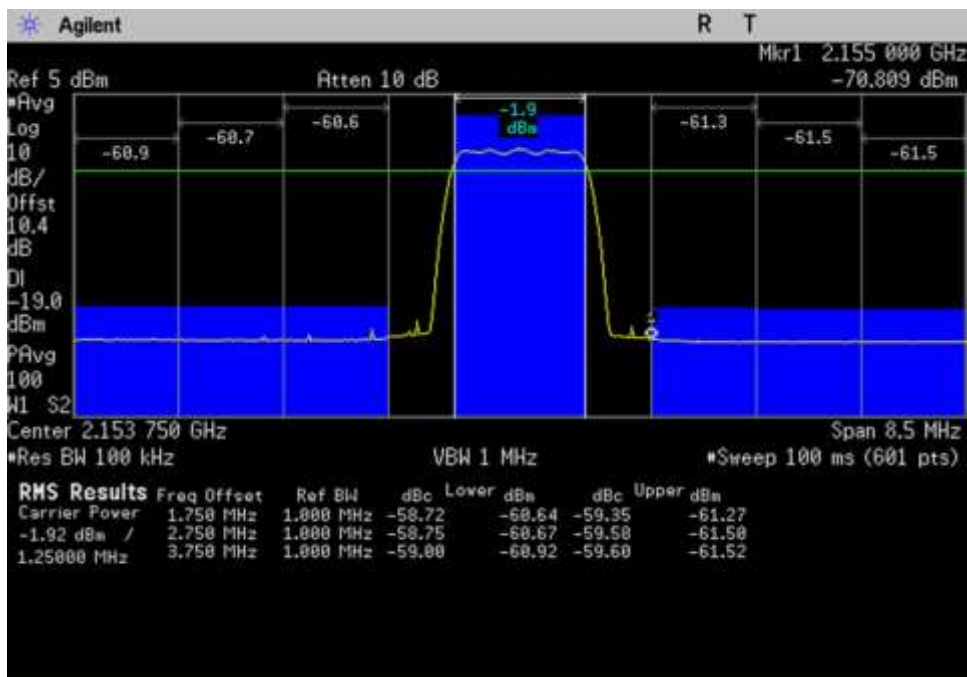


DL\_2110-2155\_CDMA\_2149.5-2158MHz


### GSM

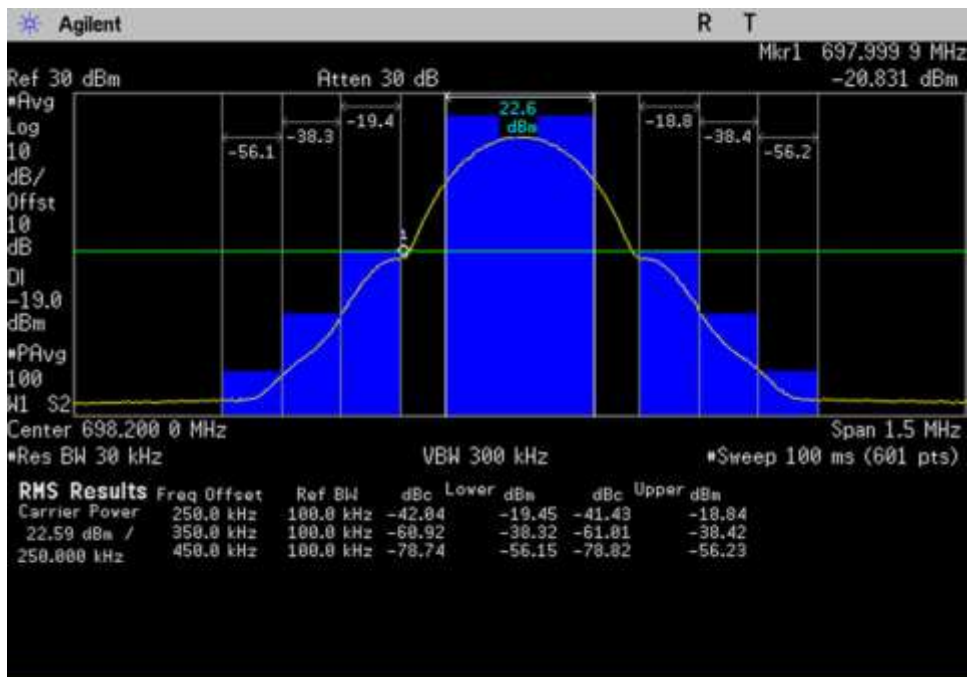


UL\_698-716\_GSM\_697.45- 698.95MHz

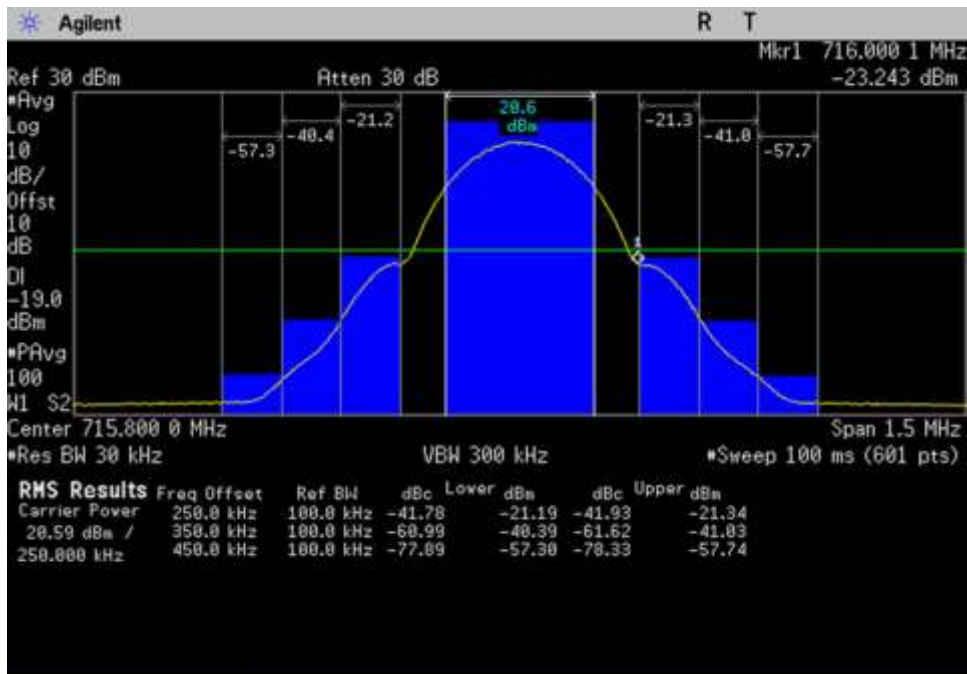

UL\_698-716\_GSM\_715.05- 716.55MHz

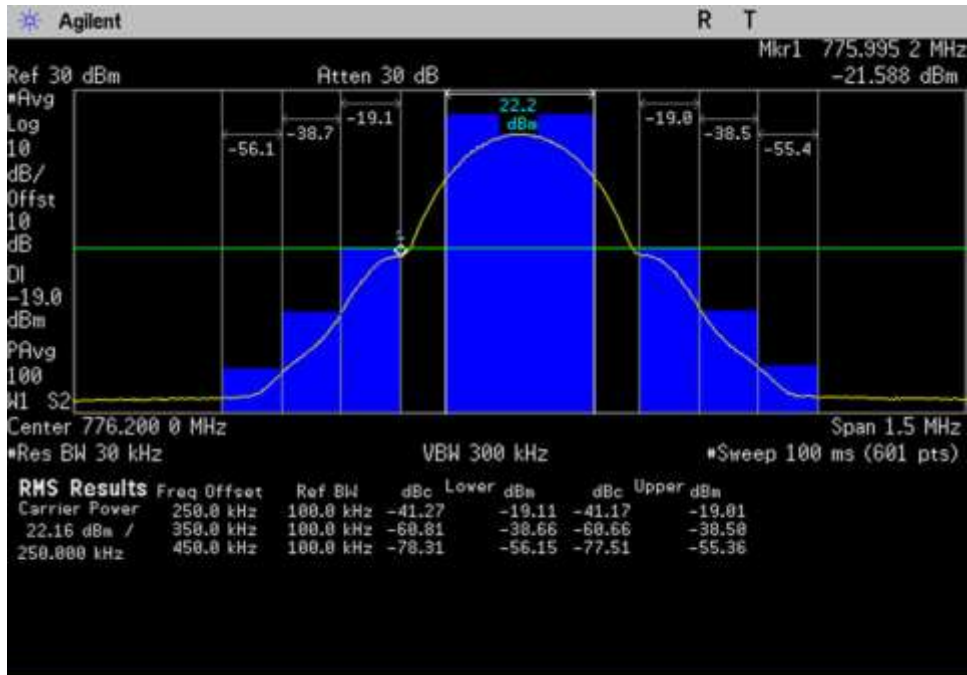


UL\_776-787\_GSM\_775.45-776.95MHz

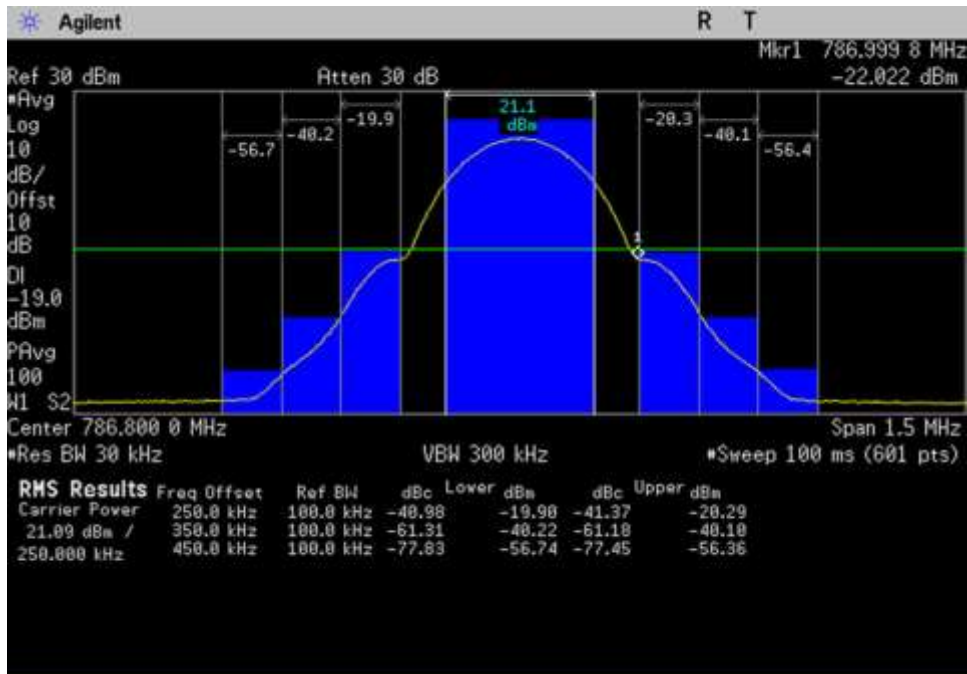


UL\_776-787\_GSM\_786.05-787.55MHz



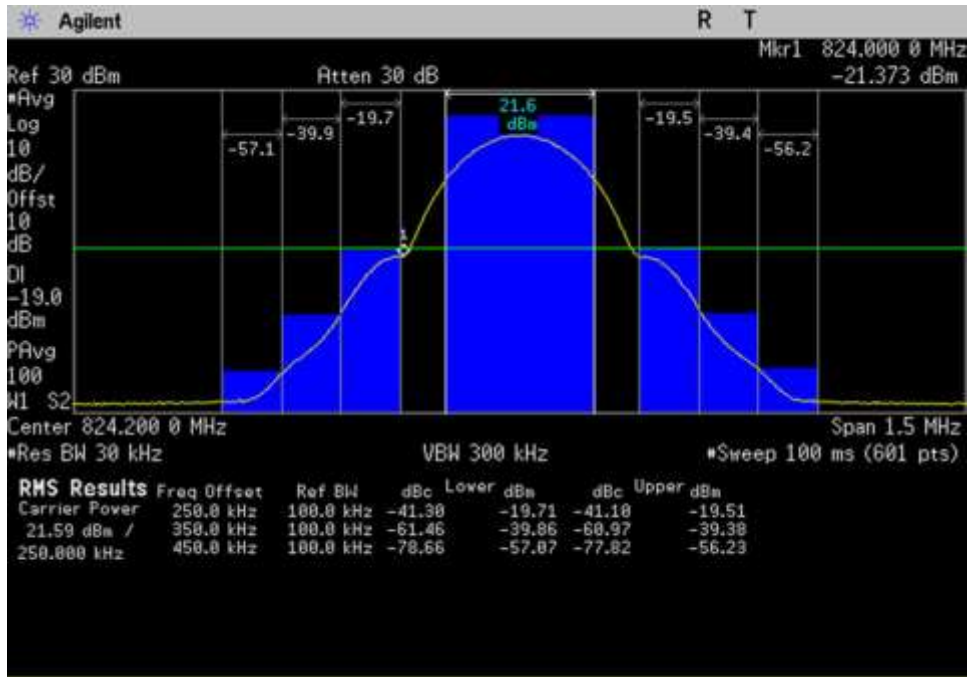


UL\_824-849\_GSM\_848.05-849.55MHz

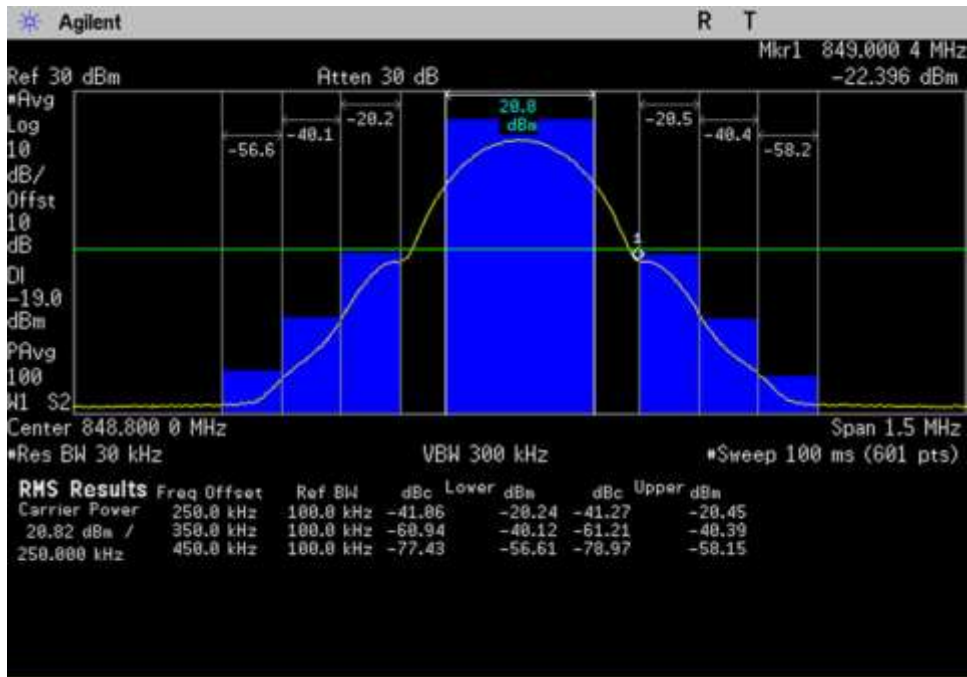


UL\_824-849\_LTE\_822.5-830.5MHz




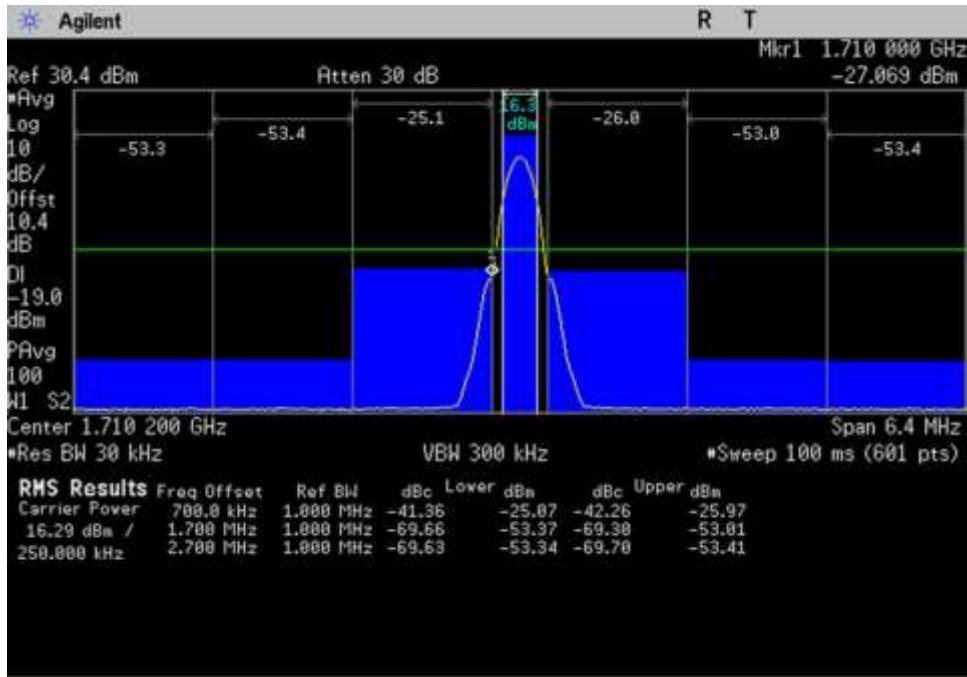


UL\_1710-1755\_GSM\_1707-1713.4MHz

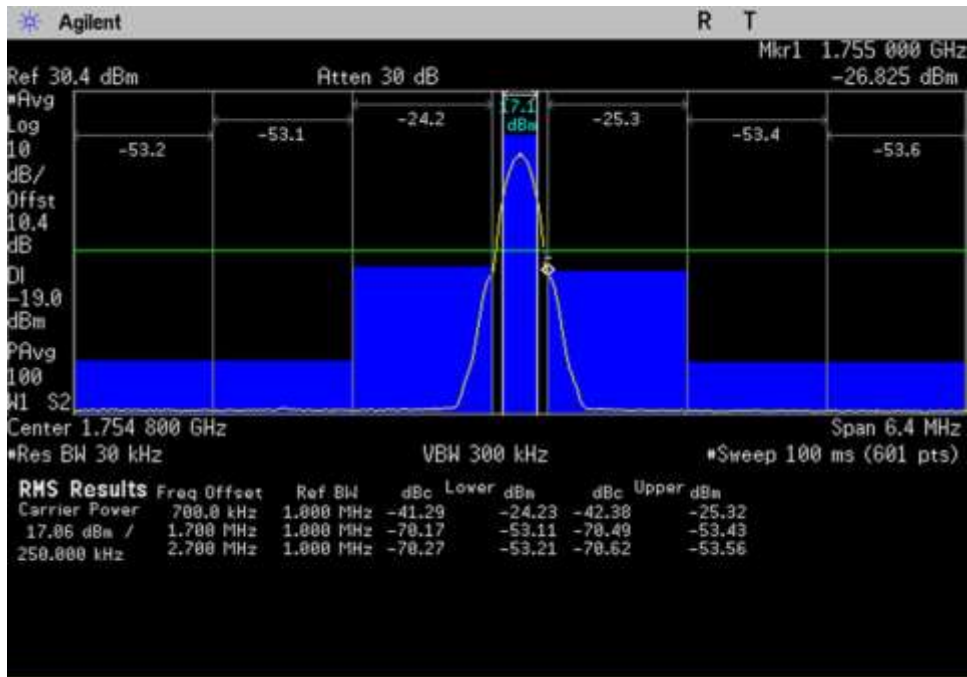


UL\_1710-1755\_GSM\_1751.6-1758MHz

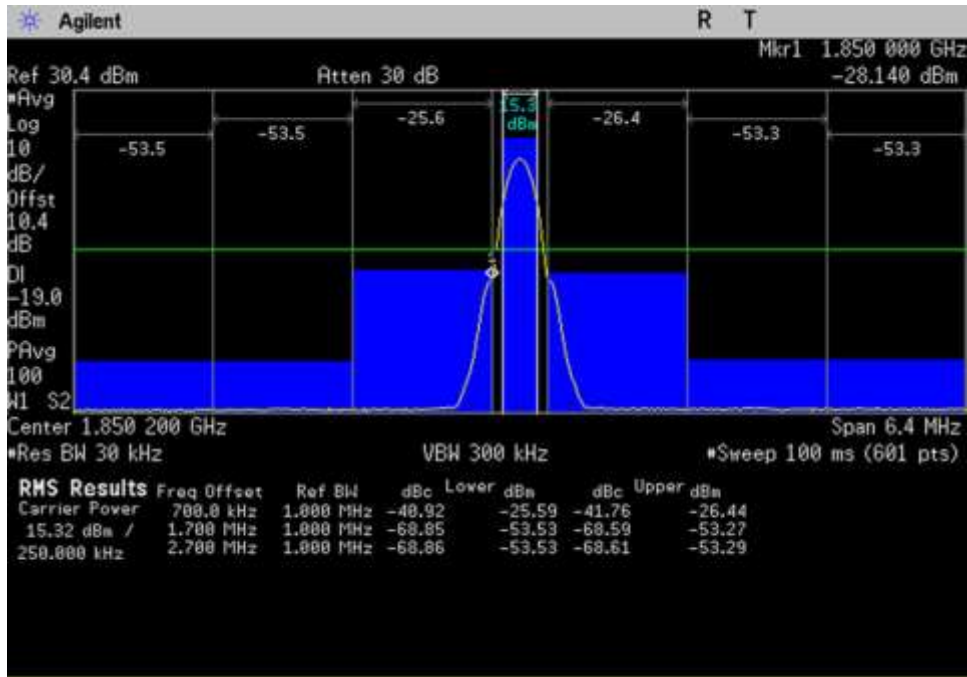


UL\_1850-1915\_GSM\_1847-1853.4MHz

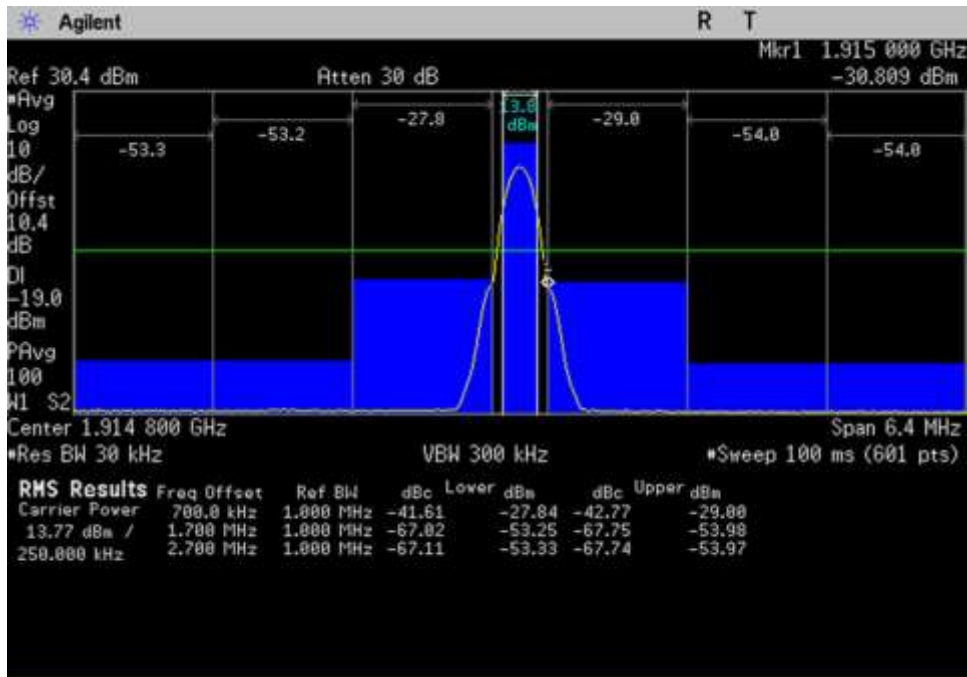


UL\_1850-1915\_GSM\_1911.6-1918MHz

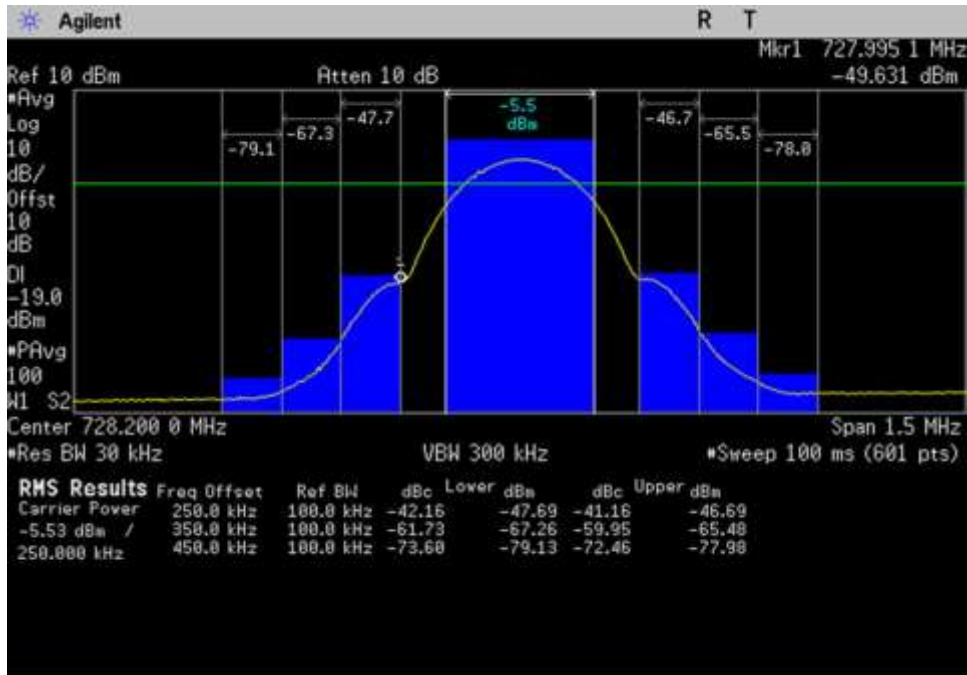


DL\_728-746\_GSM\_727.45-728.95MHz

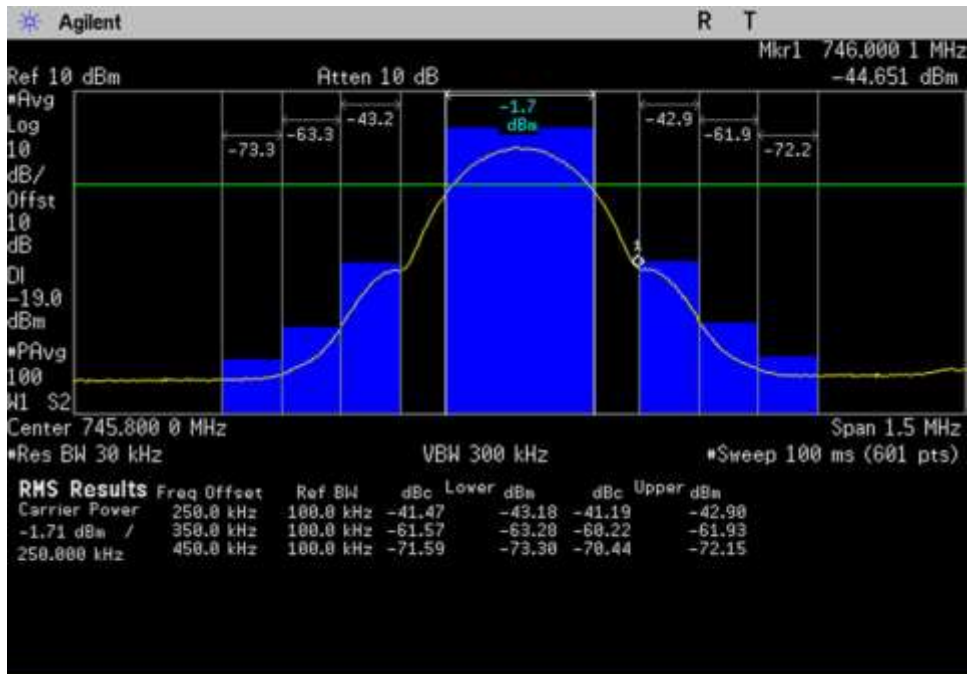


DL\_728-746\_GSM\_745.05-746.55MHz

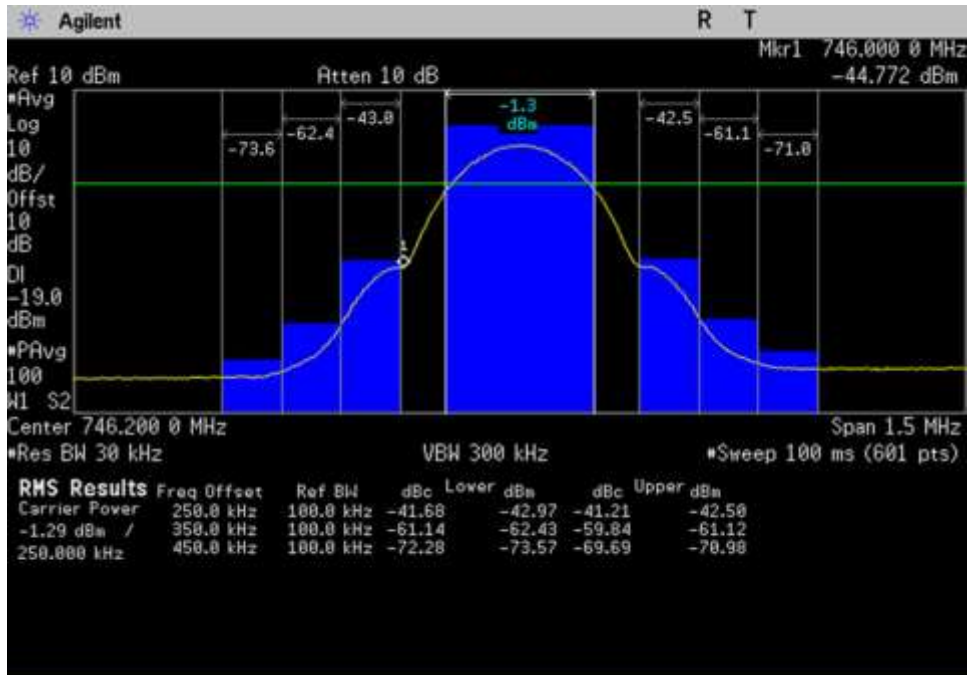


DL\_746-757\_GSM\_745.45-746.95MHz

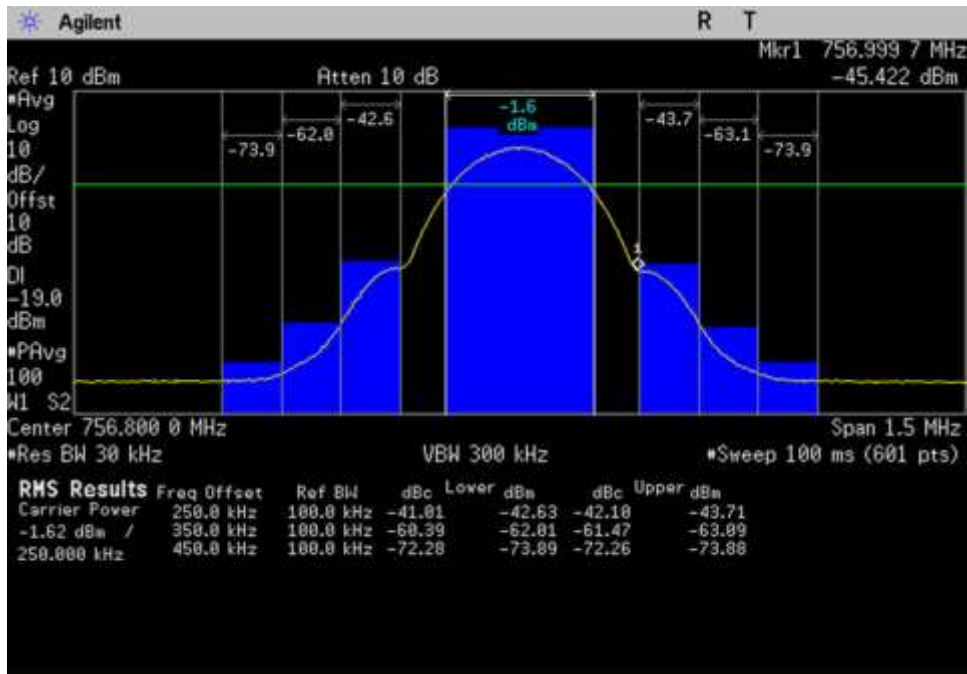


DL\_746-757\_GSM\_756.05-757.55MHz

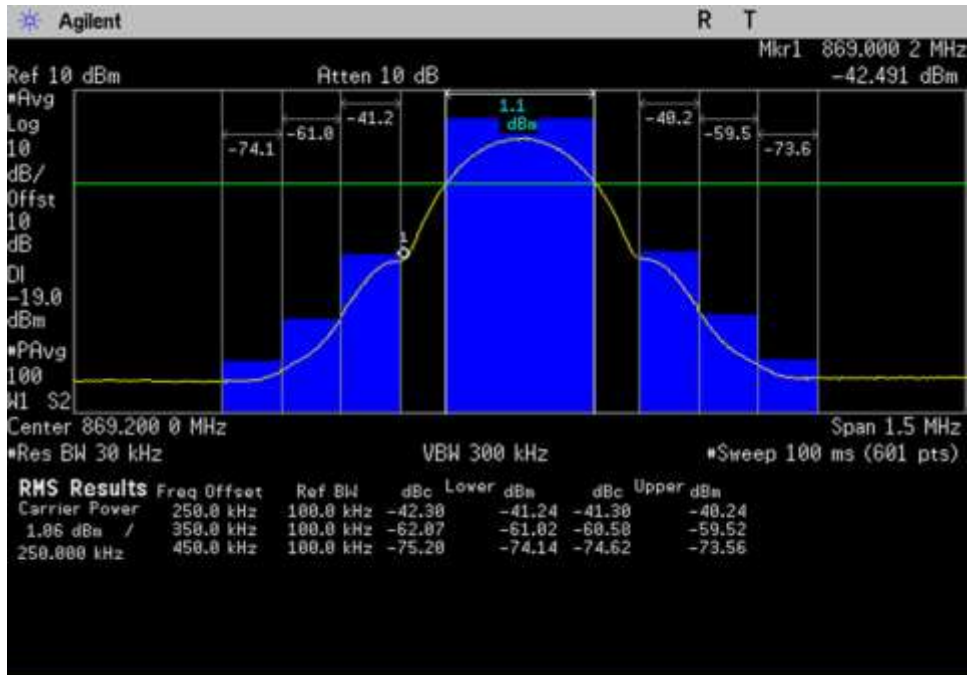


DL\_869-894\_GSM\_868.45-869.95MHz

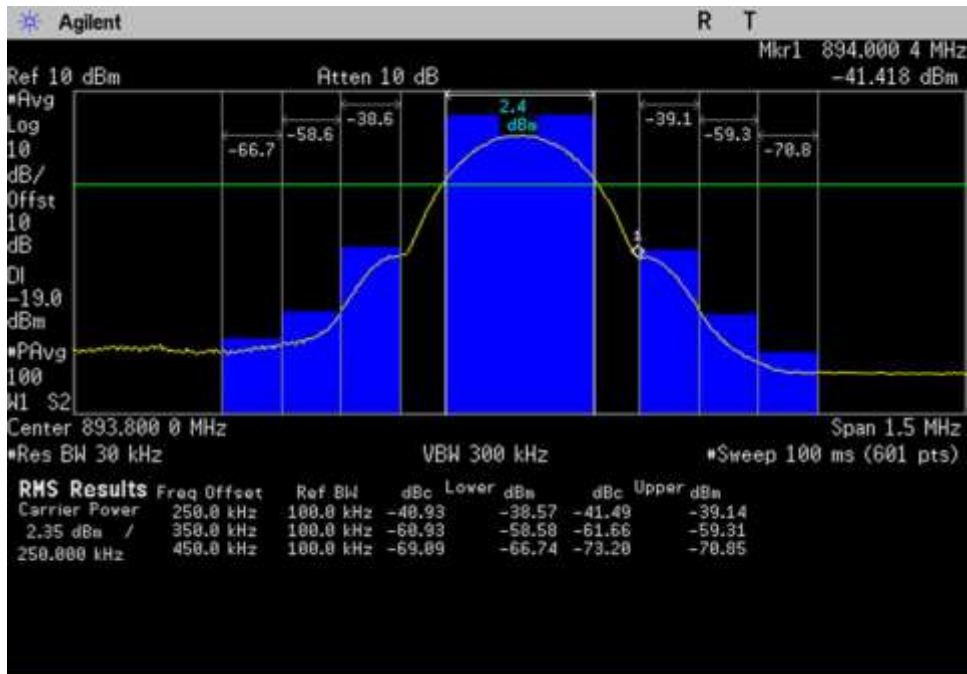

DL\_869-894\_GSM\_893.05-894.55MHz

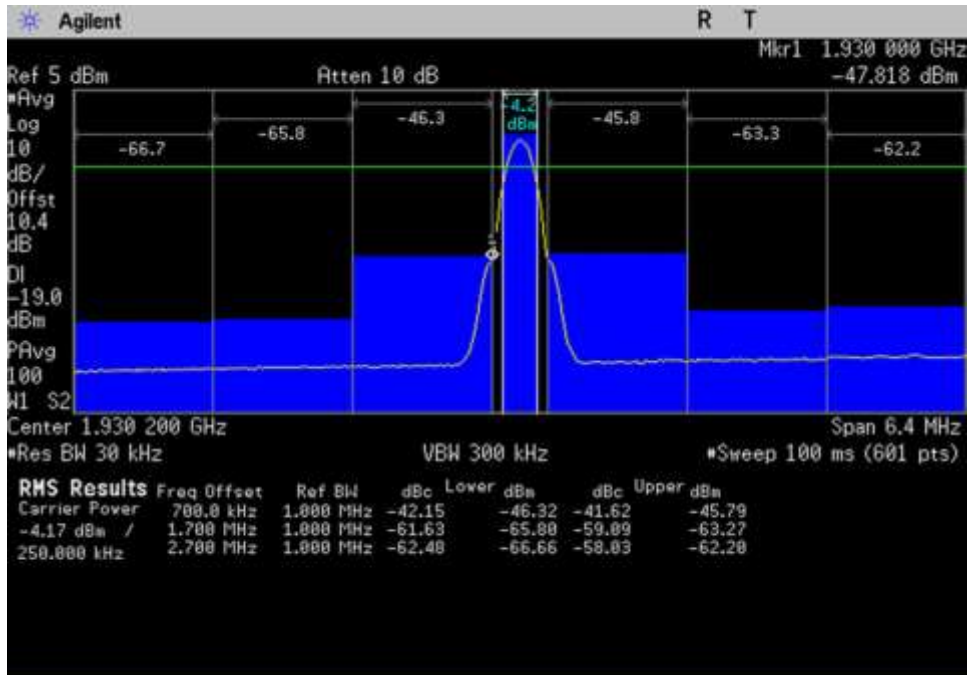


DL\_1930-1995\_GSM\_1927-1933.4MHz

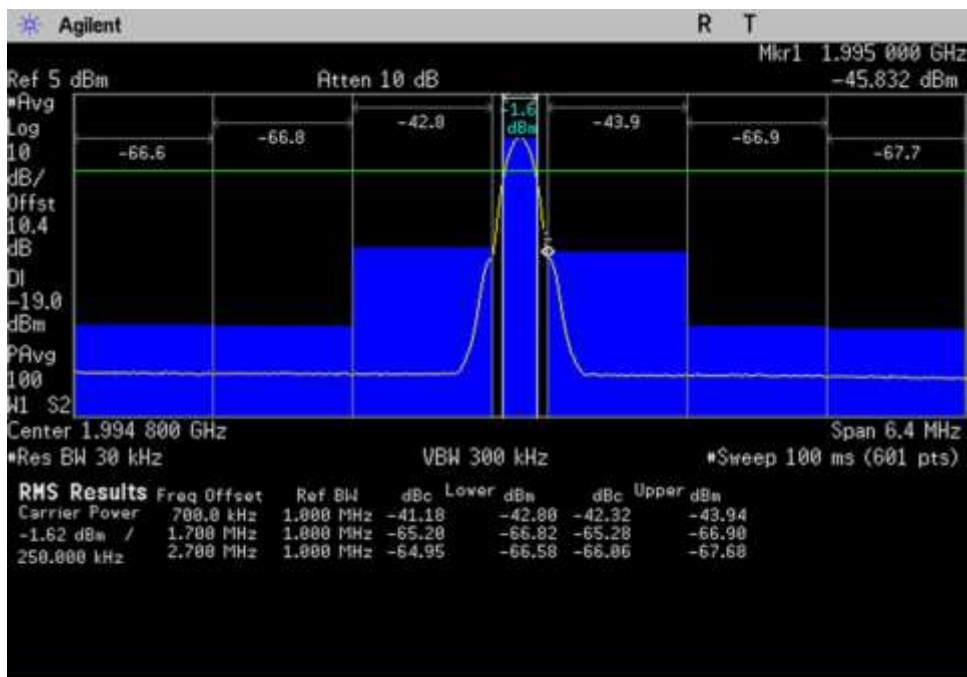


DL\_1930-1995\_GSM\_1991.6-1998MHz



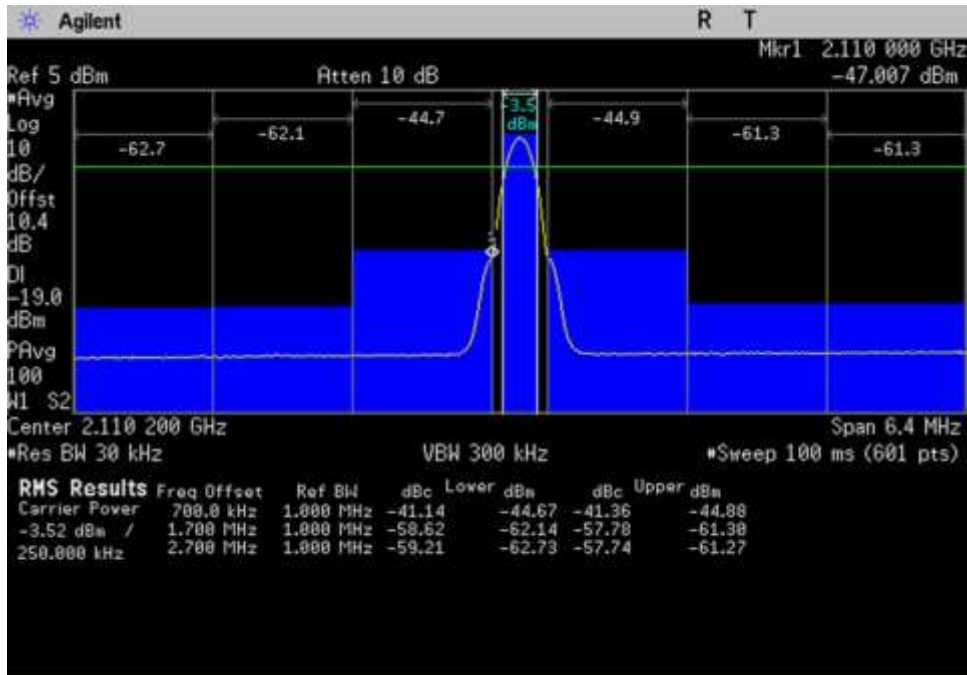


DL\_2110-2155\_GSM\_2107- 2113.4MHz

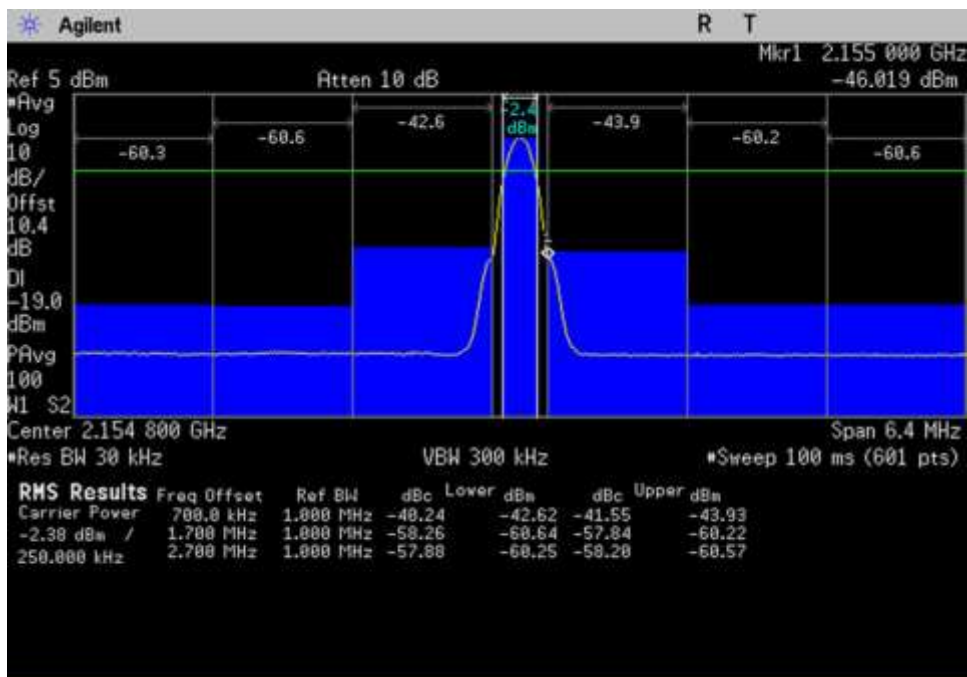


DL\_2110-2155\_GSM\_2151.6- 2158MHz




LTE

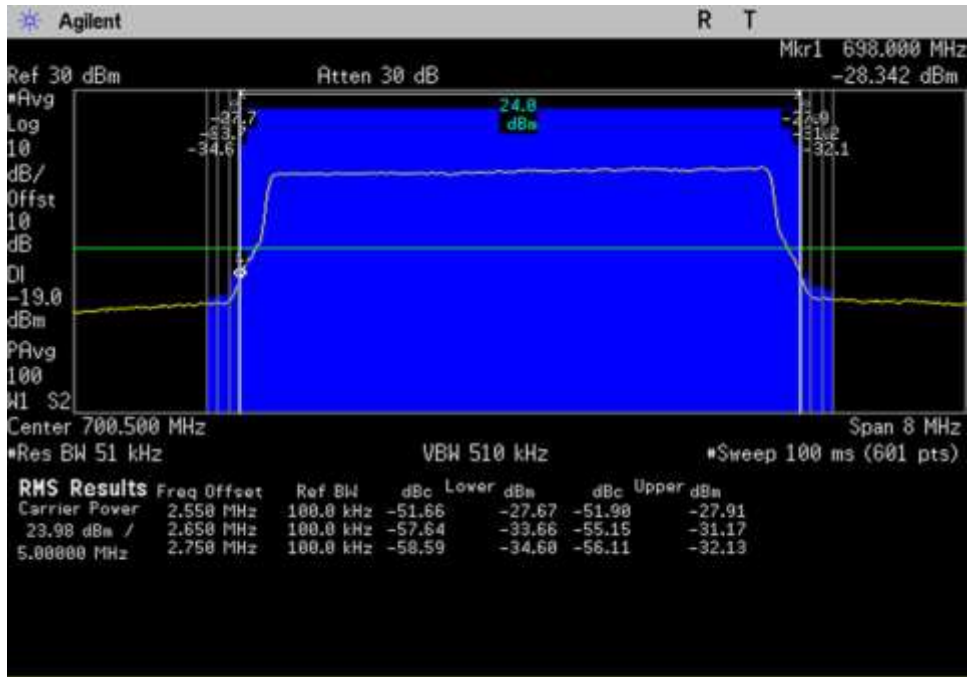


UL\_698-716\_LTE\_696.5- 704.5MHz

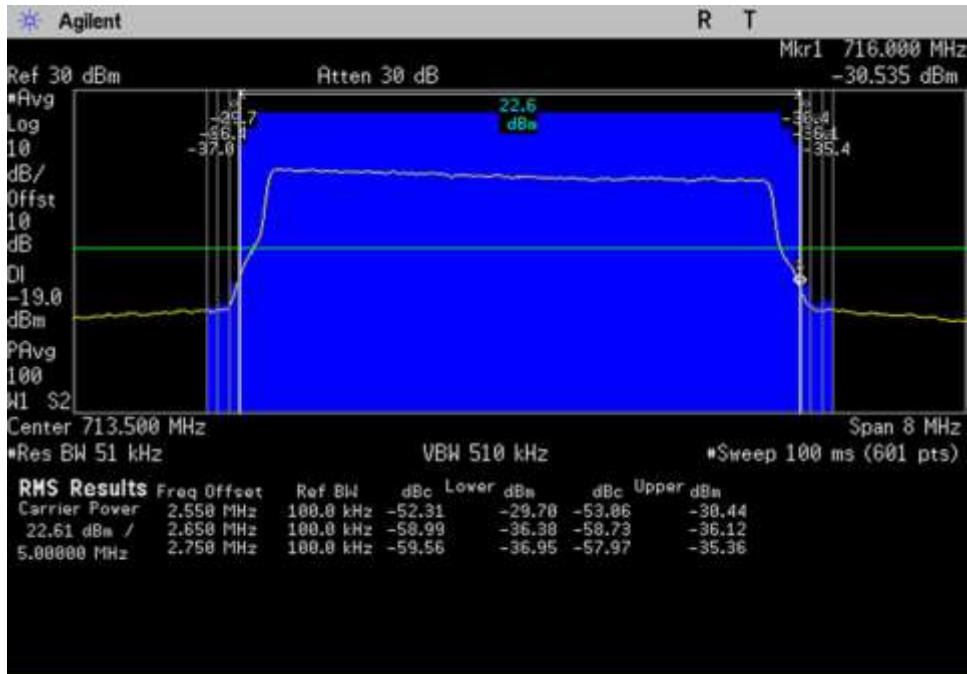


UL\_698-716\_LTE\_709.5- 717.5MHz

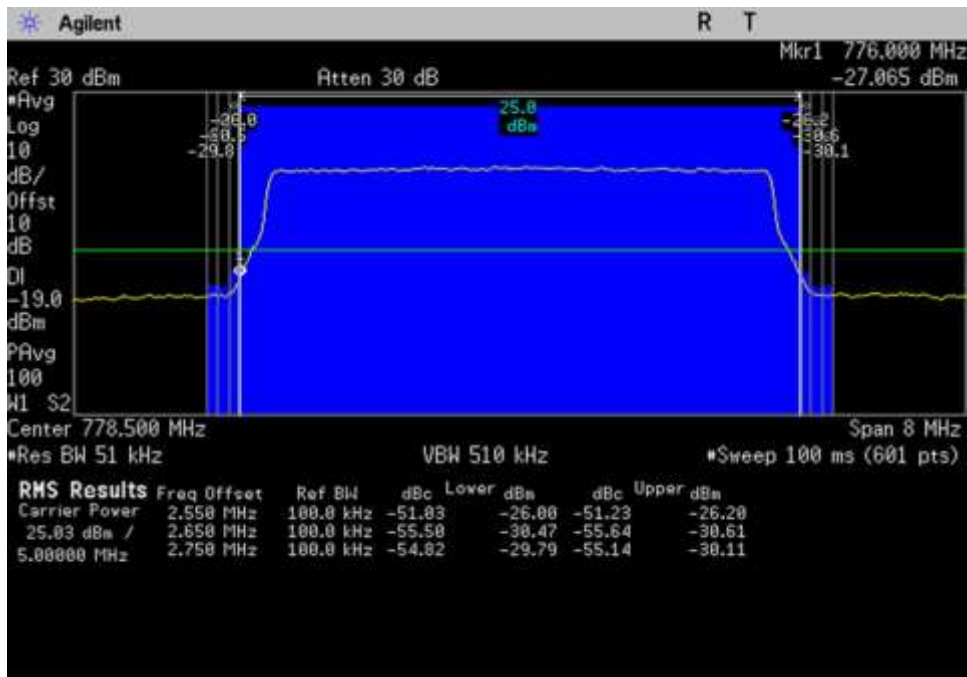


UL\_776-787\_LTE\_774.5-782.5MHz

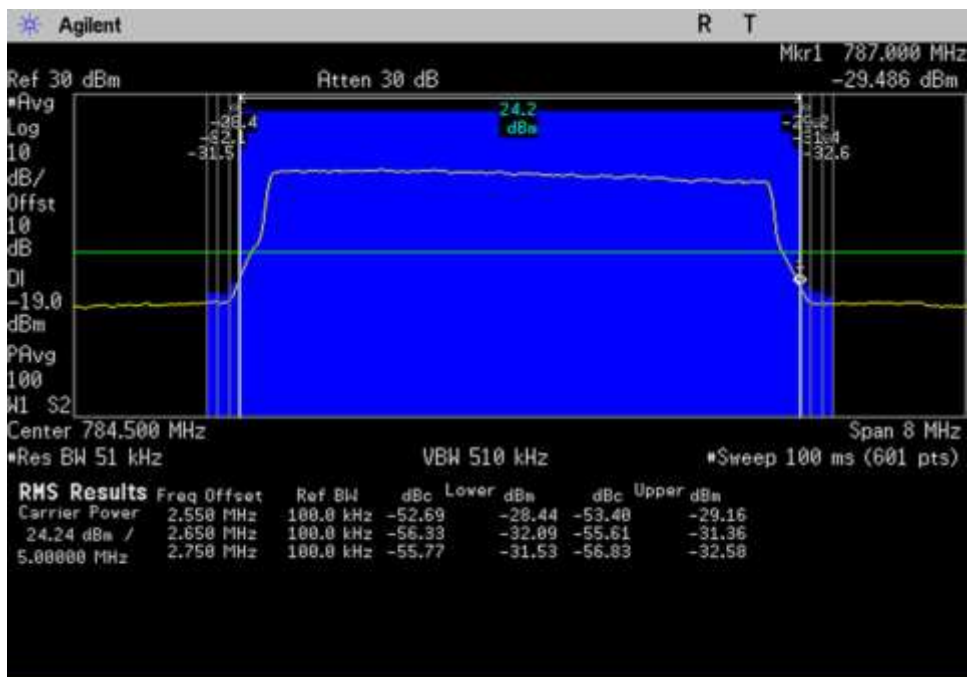


UL\_776-787\_LTE\_780.5-788.5MHz

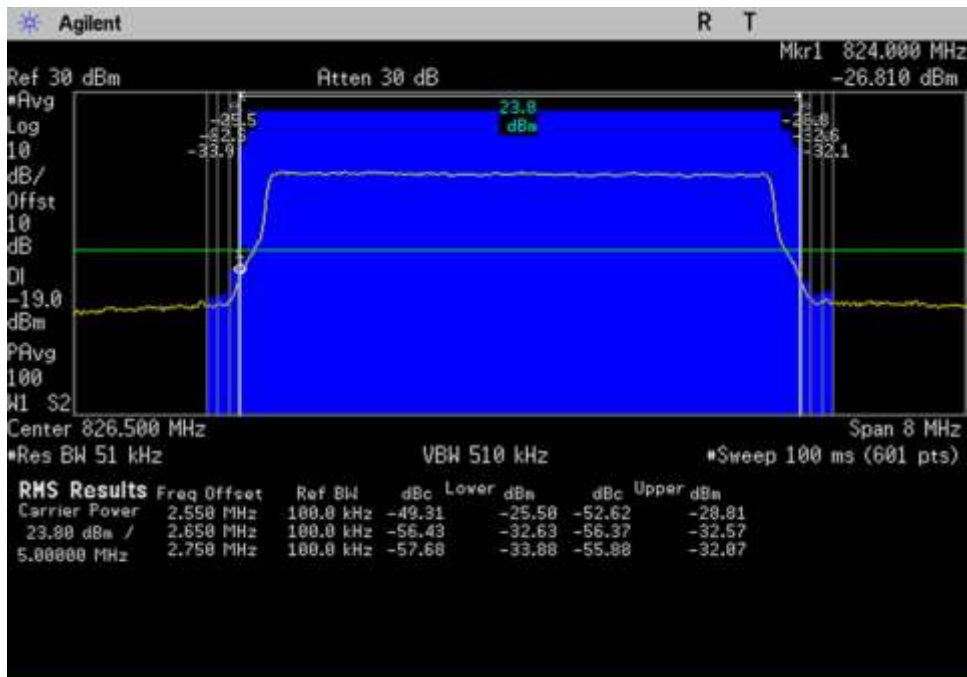


UL\_824-849\_LTE\_822.5-830.5MHz

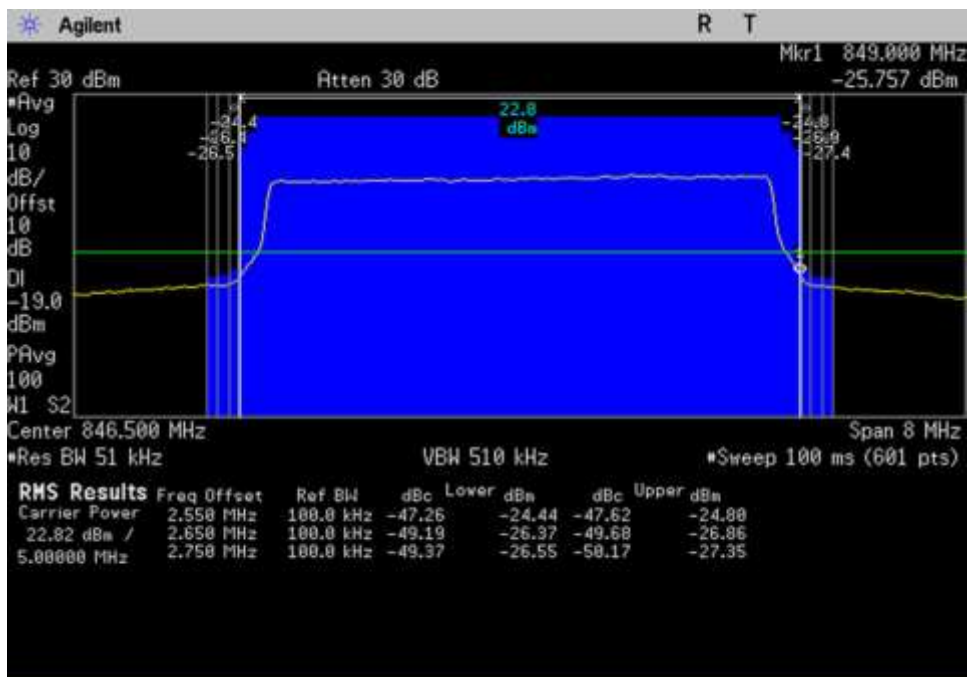


UL\_824-849\_LTE\_842.5-850.5MHz

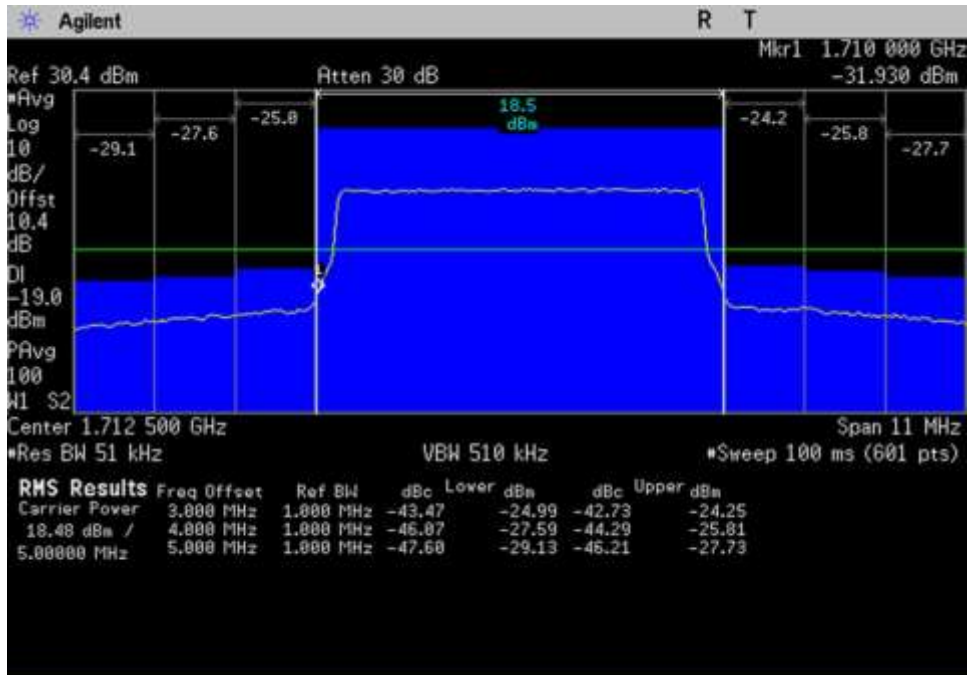


UL\_1710-1755\_LTE\_1707-1718MHz

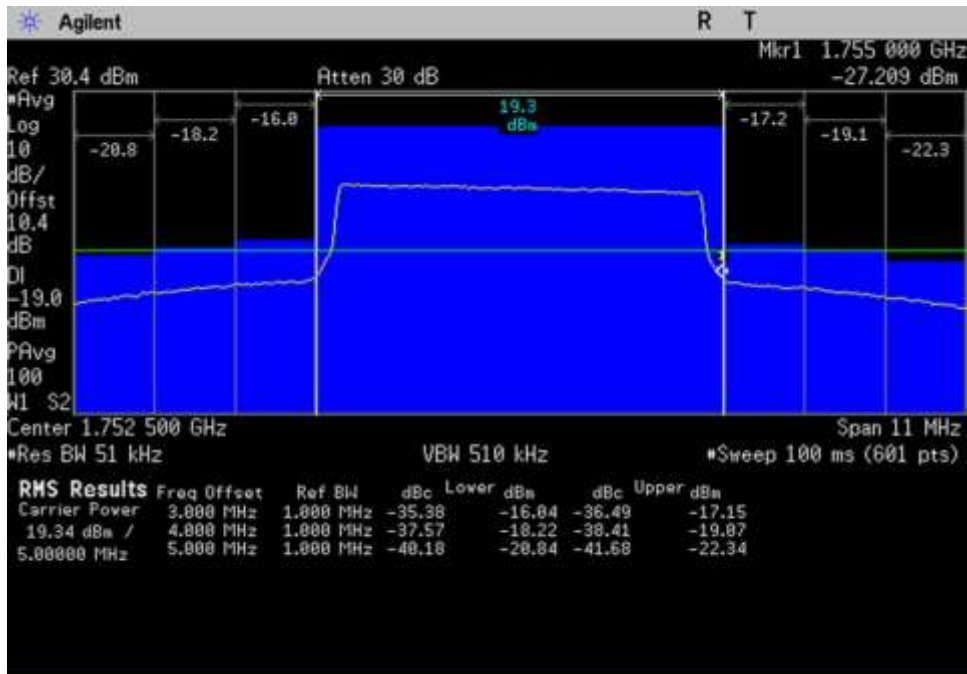


UL\_1710-1755\_LTE\_1747-1758MHz

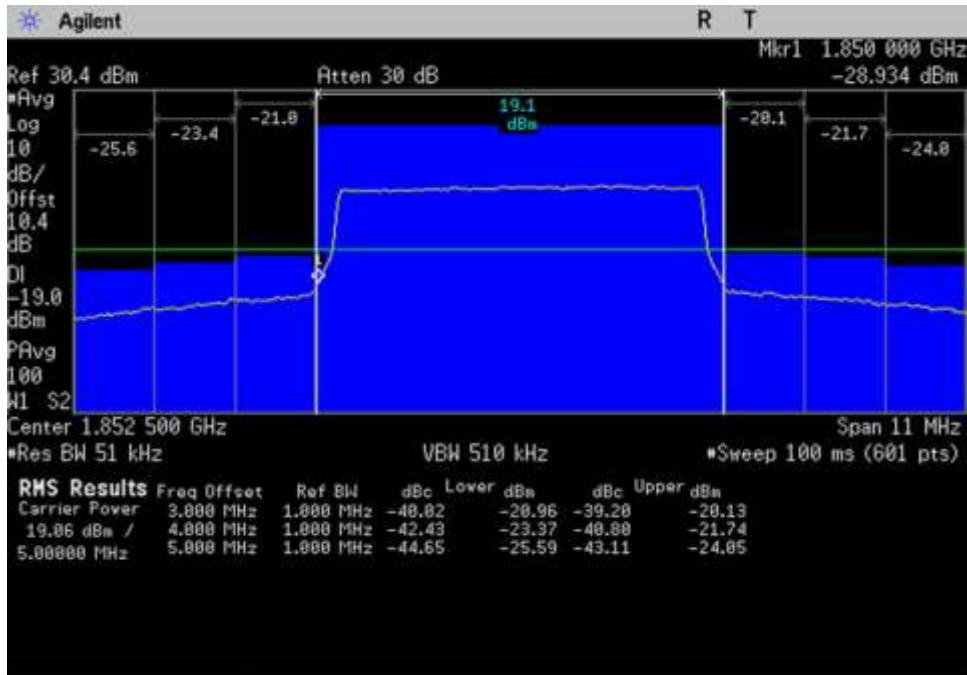


UL\_1850-1915\_LTE\_1847-1858MHz

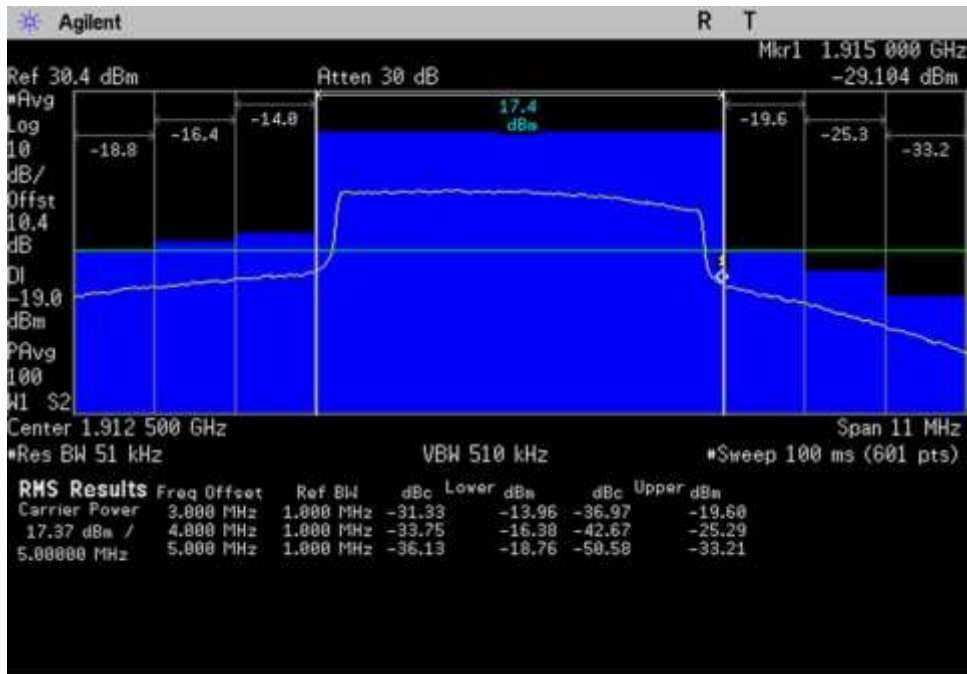

UL\_1850-1915\_LTE\_1907-1918MHz

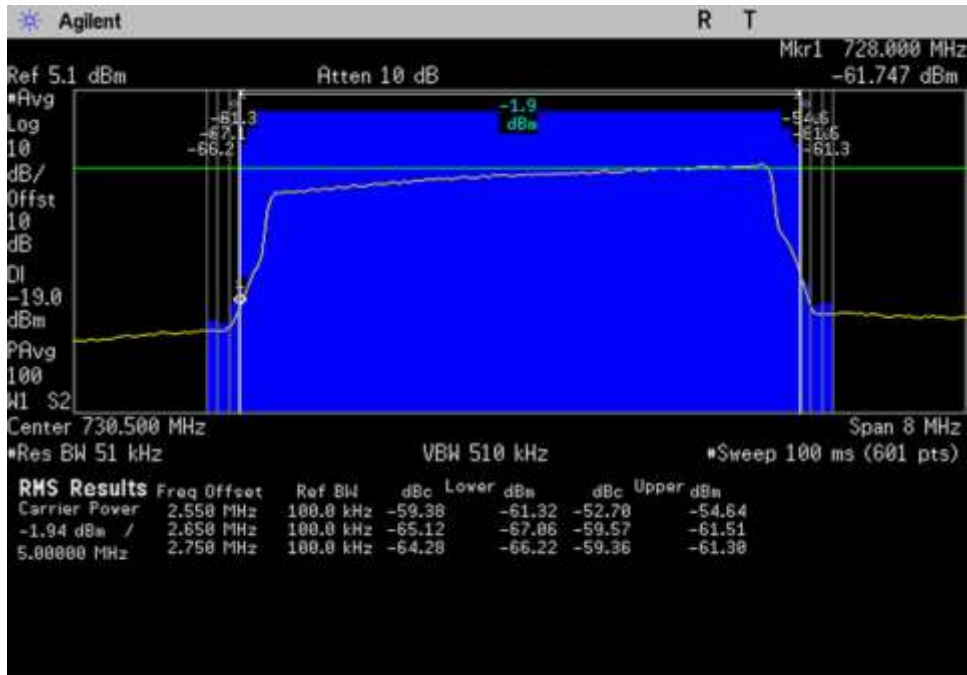


DL\_728-746\_LTE\_726.5-734.5MHz

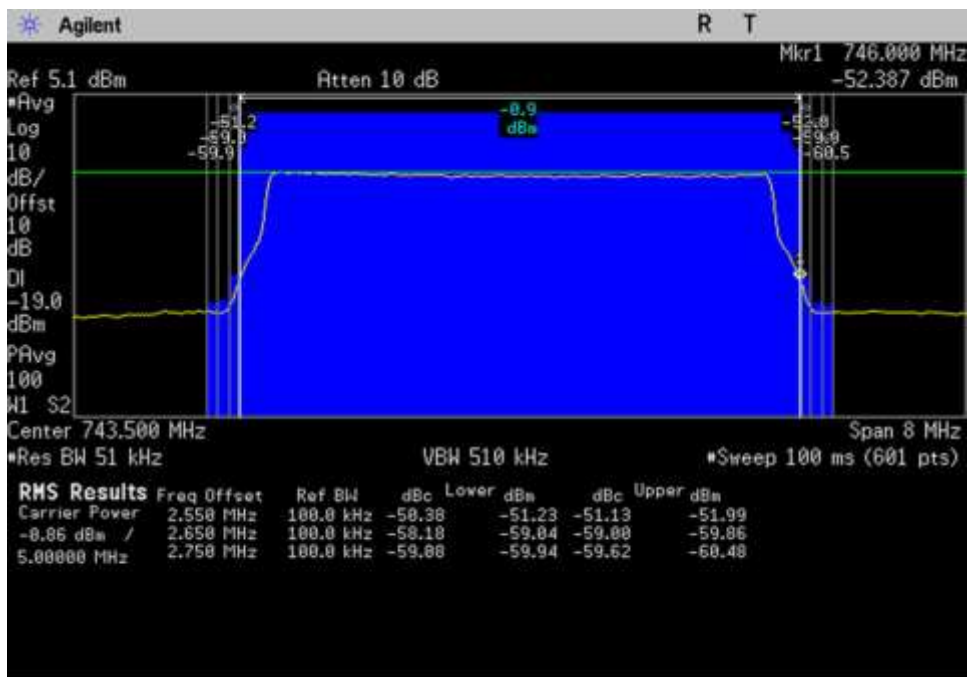


DL\_728-746\_LTE\_739.5-747.5MHz



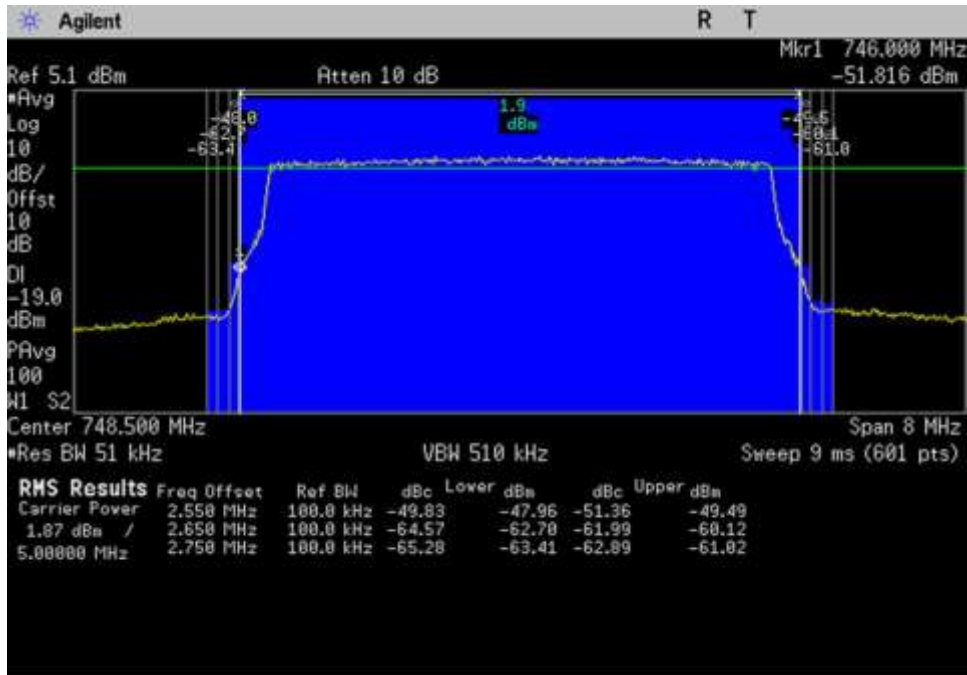


DL\_746-757\_LTE\_744.5-752.5MHz

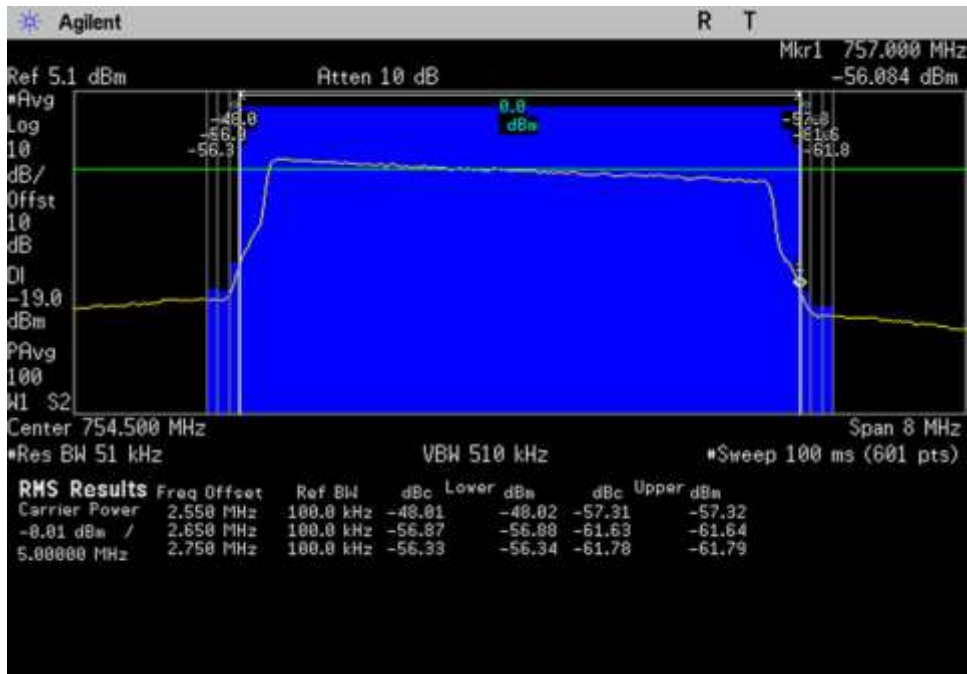


DL\_746-757\_LTE\_750.5-758.5MHz




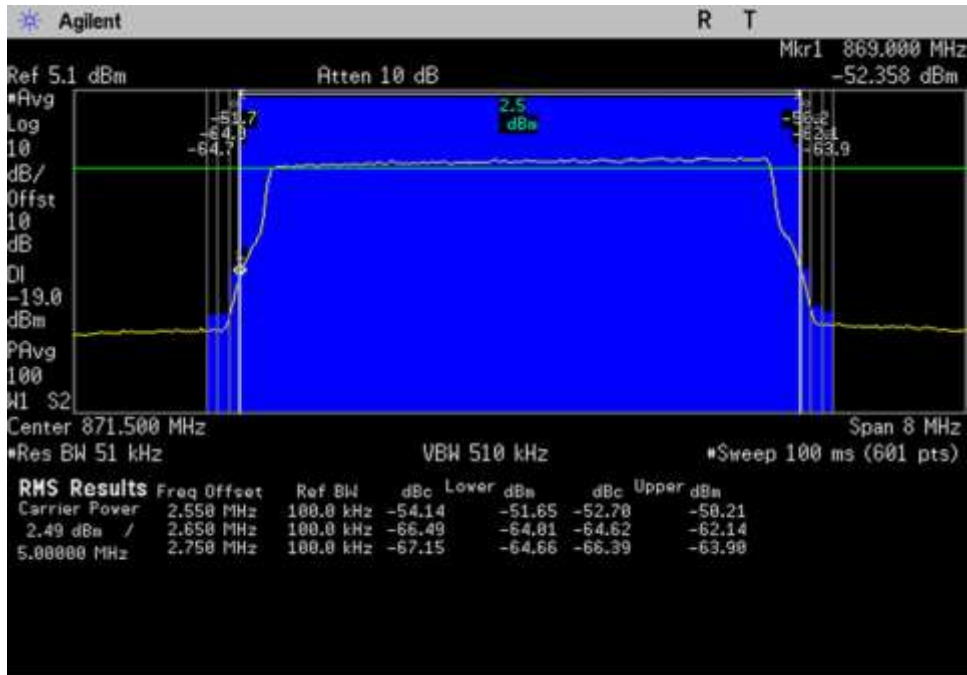


DL\_869-894\_LTE\_867.5-875.5MHz

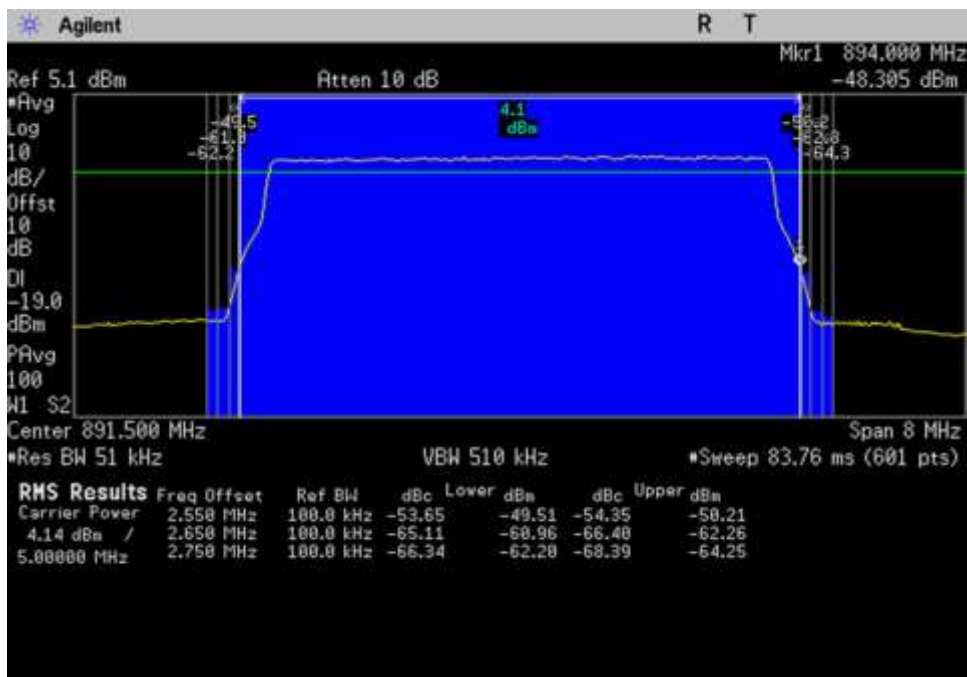


DL\_869-894\_LTE\_887.5-895.5MHz

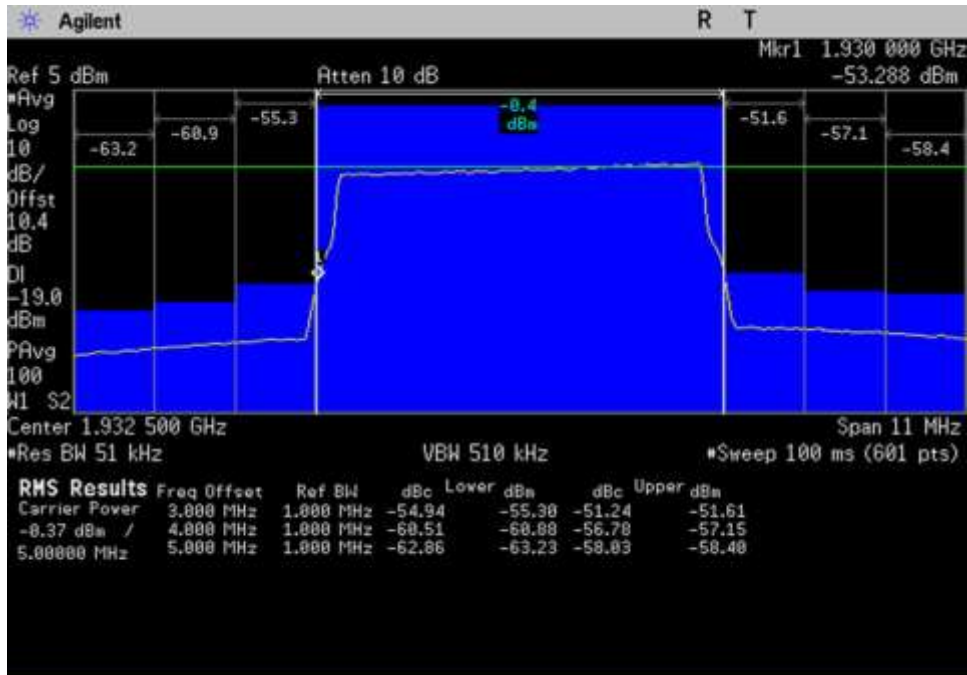


DL\_1930-1995\_LTE\_1927-1938MHz

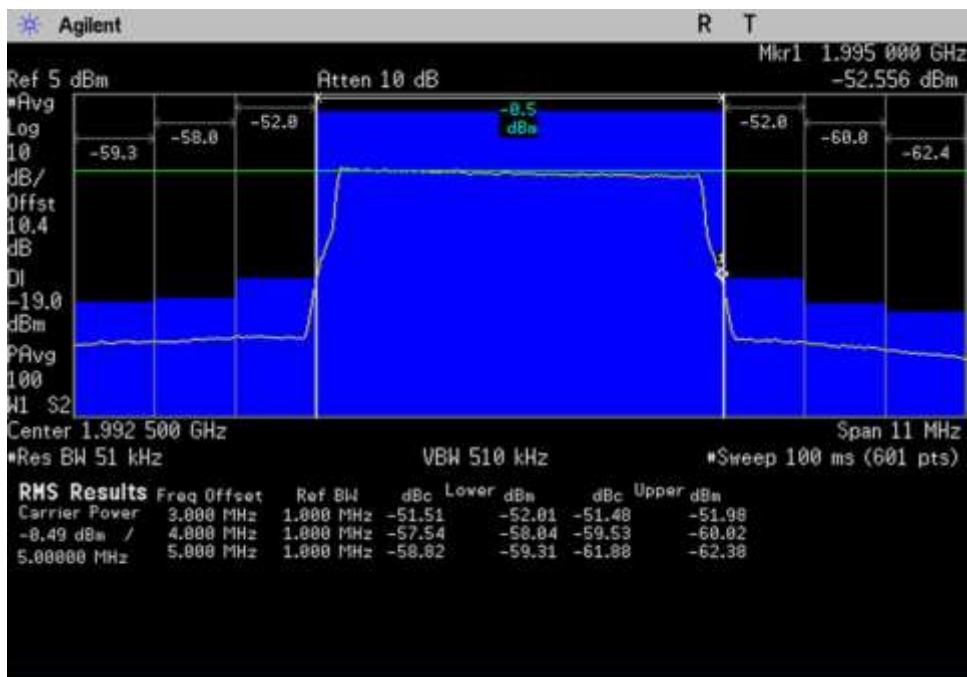

DL\_1930-1995\_LTE\_1987-1998MHz

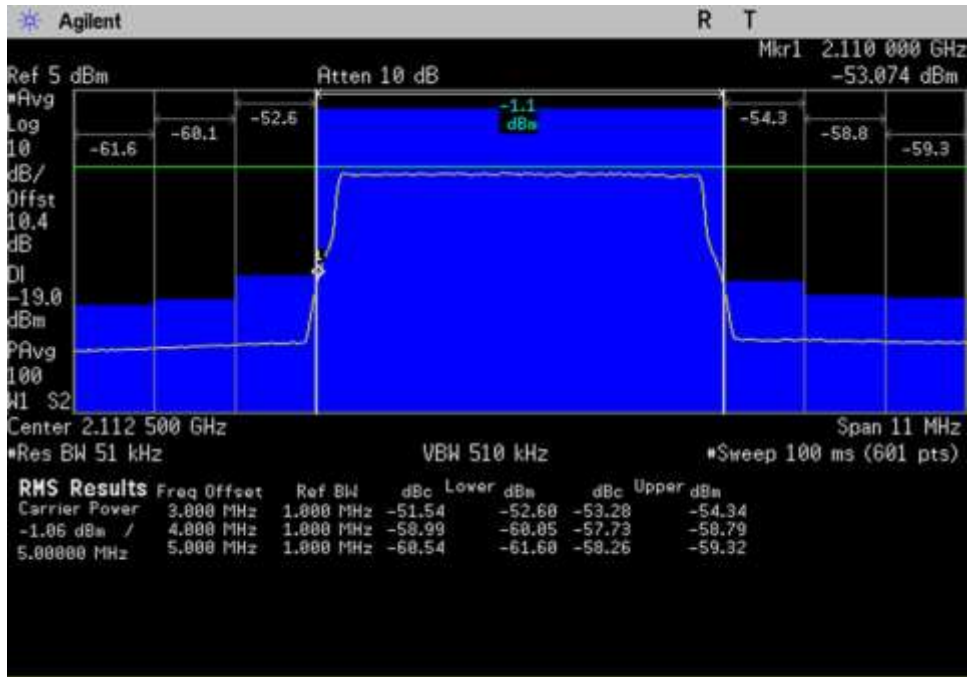

DL\_2110-2155\_LTE\_2107-2118MHz

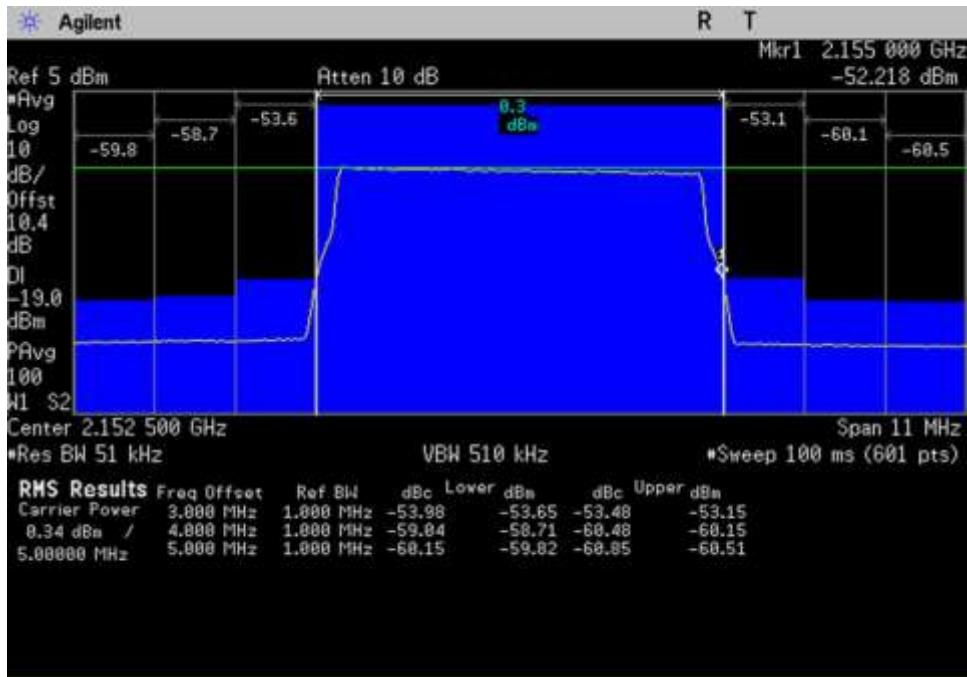

DL\_2110-2155\_LTE\_2147-2158MHz

## 7.6 Conducted Spurious Emissions

### Test Conditions / Setup

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170  
 Customer: Cellphone-Mate, Inc.  
 Specification: **7.6 Conducted Spurious Emissions / 47 CFR §2.1051 Spurious Emissions at Antenna Terminals**  
 Work Order #: **102180** Date 01/15/2019  
 Test Type: **Conducted Emissions**  
 Tested By: **Hieu S Nguyenpham**  
 Software: EMITest 5.03.11

**Equipment Tested:**

Device	Manufacturer	Model #	S/N
Configuration 1			

**Support Equipment:**

Device	Manufacturer	Model #	S/N
Configuration 1			

**Test Conditions / Notes:**

Test environment conditions: Temperature: 20.6°C, 57.2% relative humidity, Pressure: 102.3kPa

Frequency range of measurement = 30MHz- 22GHz.  
 30 MHz - 1000MHz -> RBW\*= 1MHz VBW= 3MHz  
 1000 MHz - 22000MHz ->RBW= 1MHz VBW= 3MHz

\*Note: As specified on 7.6 Conducted spurious emissions test procedure of 935210 D03 Signal Booster Measurements v04r02, for frequencies below 1 GHz, an RBW of 1 MHz may be used in a preliminary measurement. If non-compliant emissions are detected, a final measurement shall be made with a 100 kHz RBW. Additionally, a peak detector may also be used for the preliminary measurement. If non-compliant emissions are detected, then a final measurement of these emissions shall be made with the power averaging (RMS) detector.

27.53 (f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

**Test Equipment:**

Asset #	Description	Manufacturer	Model	Calibration Date	Cal Due Date
P05411	Attenuator	Weinschel	54A-10	1/19/2018	1/19/2020
P07192	Cable	Astro	32022-29094K-29094K-48TC	10/9/2017	10/9/2019
P07191	Cable	Astro	32022-29094K-29094K-48TC	10/30/2017	10/30/2019
03418	Signal Generator	Agilent	E4438C	6/19/2017	6/19/2019
03471	Spectrum Analyzer	Agilent	E4440A	1/18/2018	1/18/2020

## Summary of Results

Pass: As summarized in plots below, the conducted spurious emissions are within limits.

### **9 kHz-30 MHz**

No Conducted Spurious Emissions were found within 20dB of the limit.

Per section 27.53 (f), the 1559-1610 band was also investigated and found emission within limits using applied correction (see calculation below).

<b>Limit Line Calculation*</b>				
<b>Frequency (MHz)</b>	<b>Antenna Gain- cable loss (dBi)</b>	<b>Limit line EIRP (dBW/MHz)</b>	<b>Limit line EIRP (dBm)</b>	<b>Limit line EIRP corrected (dBm)</b>
UL 776-787	-0.5	-70.0	-40	-40.5

**LIMIT LINE FOR SPURIOUS CONDUCTED EMISSION**

**REQUIRED ATTENUATION = 43+10 LOG P DB**


Limit line (dBuV) =  $V_{dBuV} - \text{Attenuation}$

$$\begin{aligned}
 V_{dBuV} &= 20 \text{ Log } \frac{V}{1 \times 10^{-6}} \\
 &= 20 (\text{Log } V - \text{Log } 1 \times 10^{-6}) \\
 &= 20 \text{ Log } V - 20 \text{ Log } 1 \times 10^{-6} \\
 &= 20 \text{ Log } V - 20(-6) \\
 &= 20 \text{ Log } V + 120
 \end{aligned}$$


$$\begin{aligned}
 \text{Attenuation} &= 43 + 10 \text{ Log } P \\
 &= 43 + 10 \text{ Log } \frac{V^2}{R} \\
 &= 43 + 10 (\text{Log } V^2 - \text{Log } R) \\
 &= 43 + 10 (2 \text{ Log } V - \text{Log } R) \\
 &= 43 + 20 \text{ Log } V - 10 \text{ Log } R
 \end{aligned}$$

$$\begin{aligned}
 \text{Limit line} &= V_{dBuV} - \text{Attenuation} \\
 &= 20 \text{ Log } V + 120 - (43 + 20 \text{ Log } V - 10 \text{ Log } R) \\
 &= 20 \text{ Log } V + 120 - 43 - 20 \text{ Log } V + 10 \text{ Log } R \\
 &= 20 \text{ Log } V + 120 - 43 - 20 \text{ Log } V + 10 \text{ Log } R \\
 &= 120 - 43 + 10 \text{ Log } 50 \quad \text{Note : } R = 50 \Omega \\
 &= 120 - 43 + 16.897 \\
 &= 94 \text{ dBuV at any power level}
 \end{aligned}$$

Plots

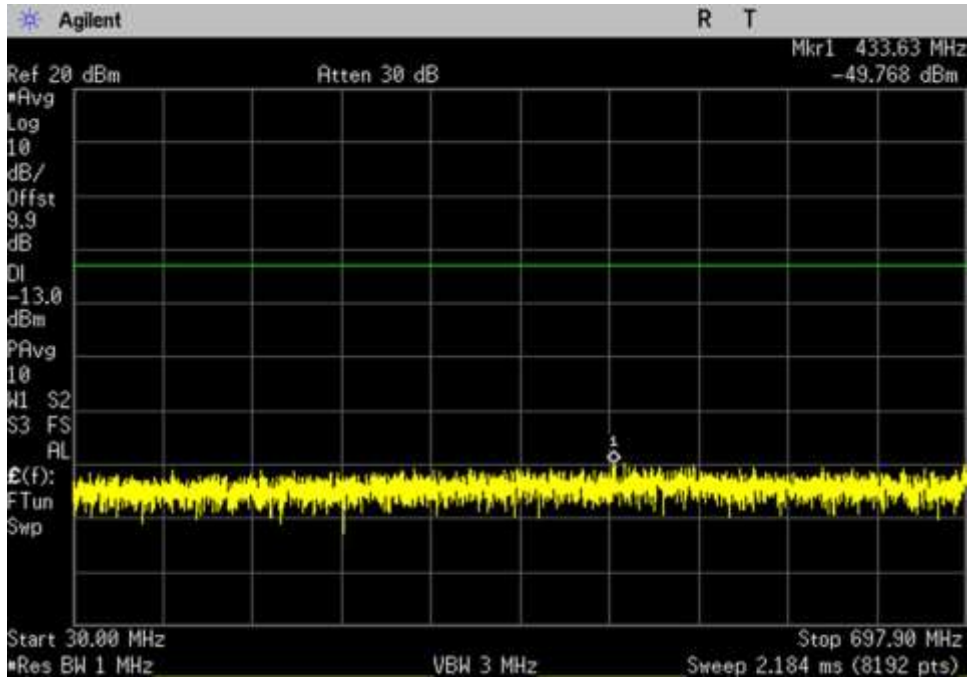


UL\_698-716\_30- 697.9MHz

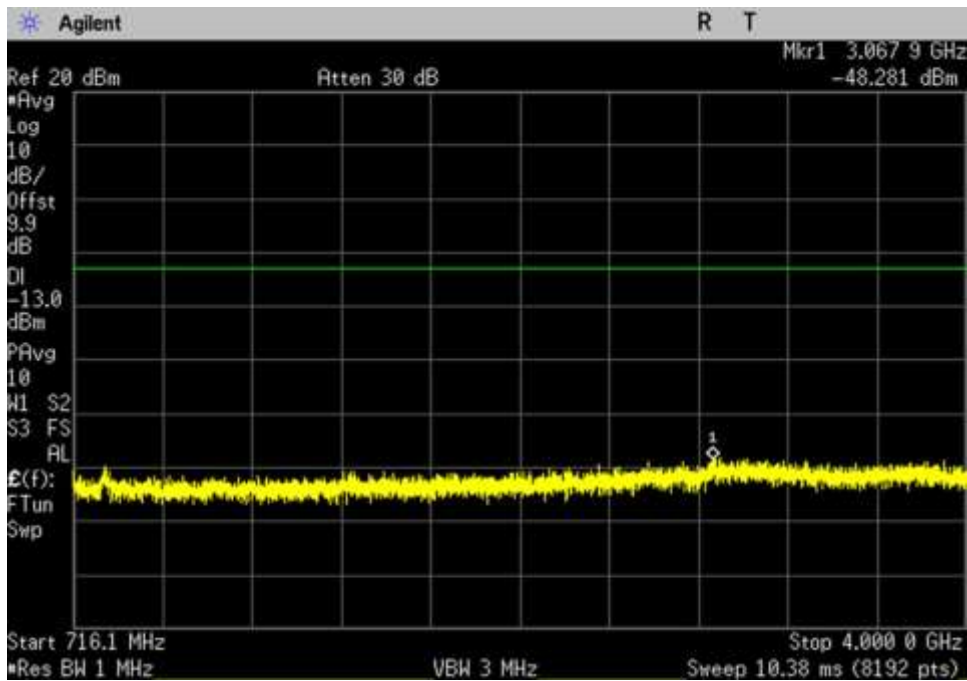


UL\_698-716\_716.1- 4000MHz




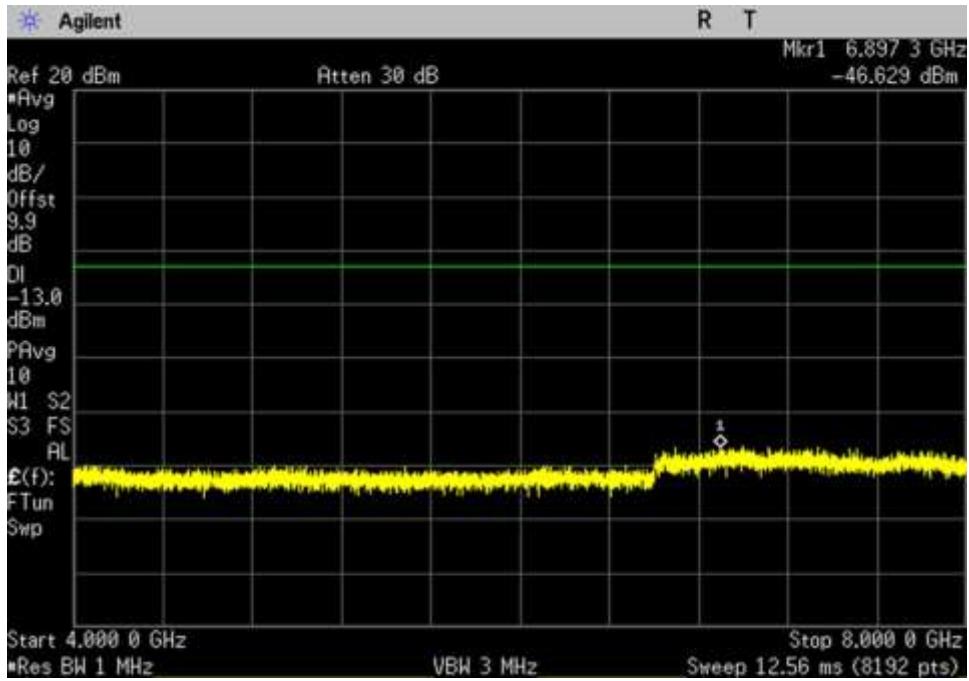


UL\_698-716\_ 4000- 8000MHz

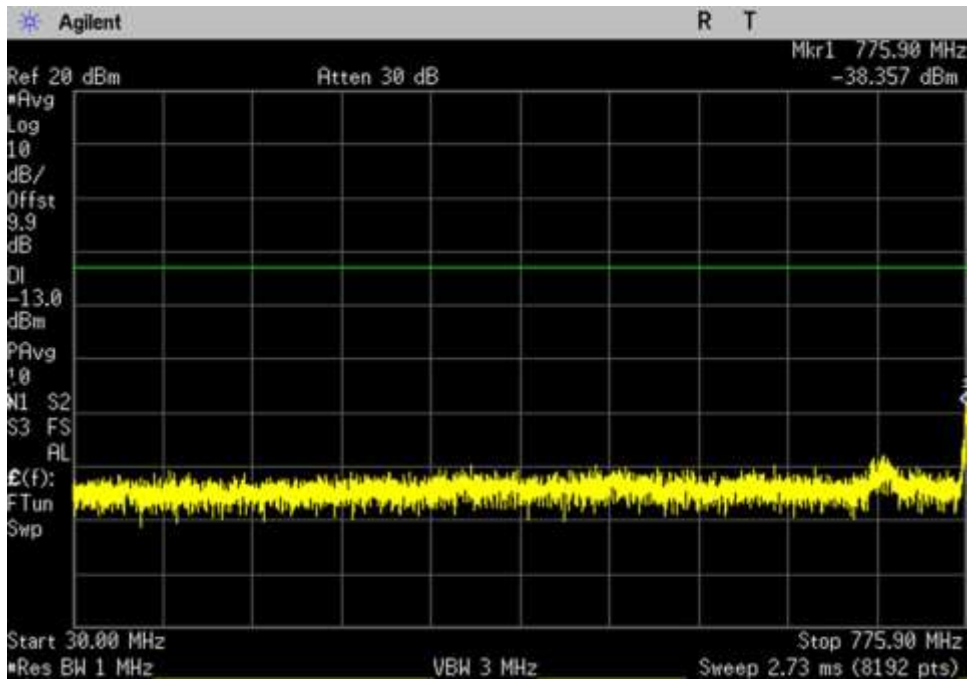


UL\_776-787\_ 30- 775.9MHz

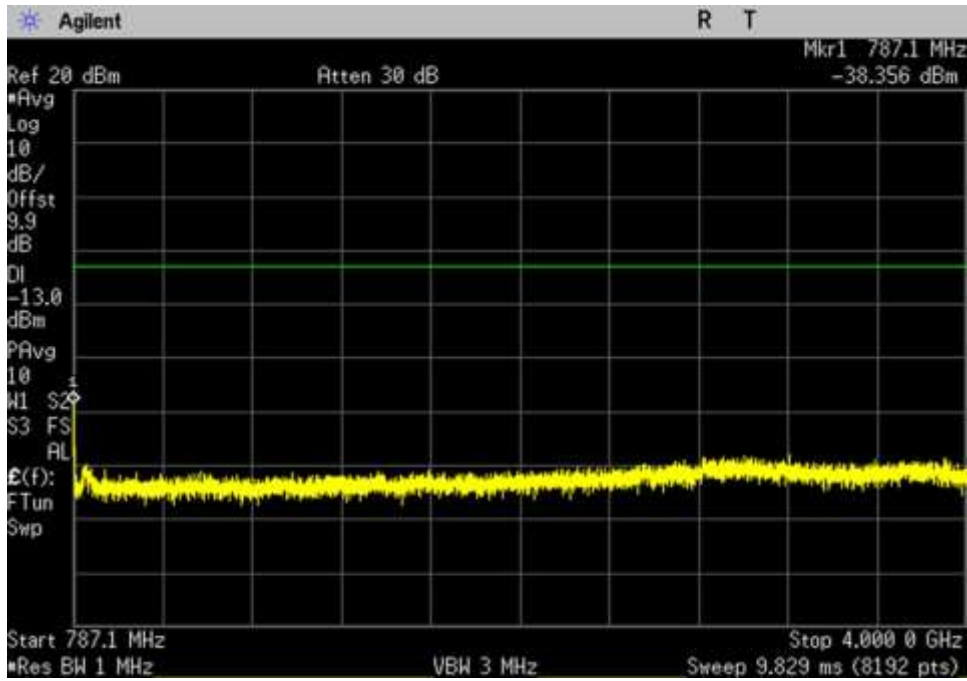


UL\_776-787\_ 787.1- 4000MHz

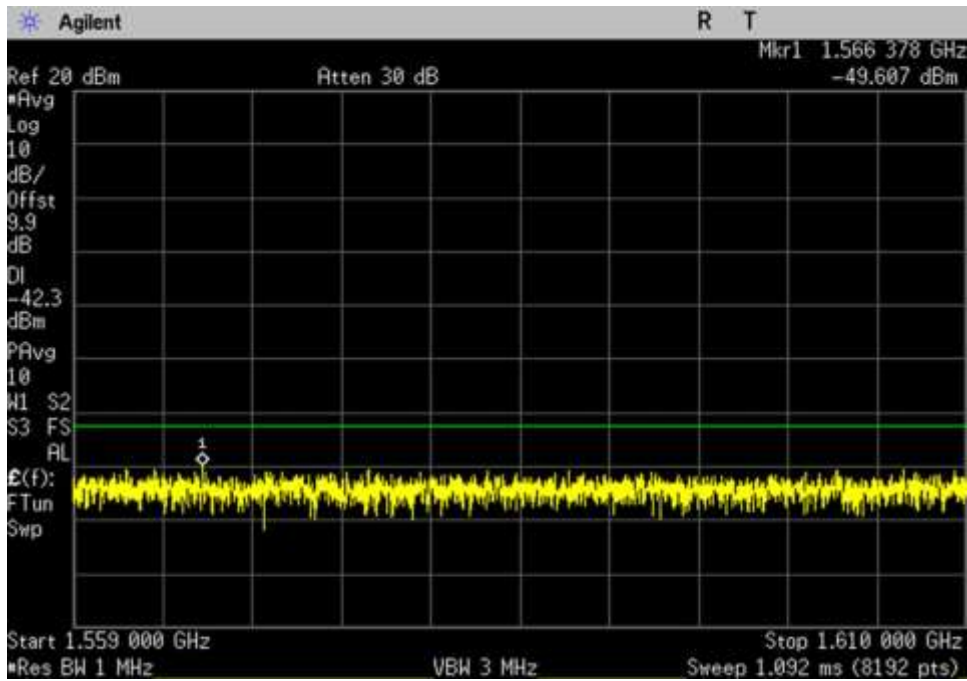


UL\_776-787\_ 1559- 1610MHz

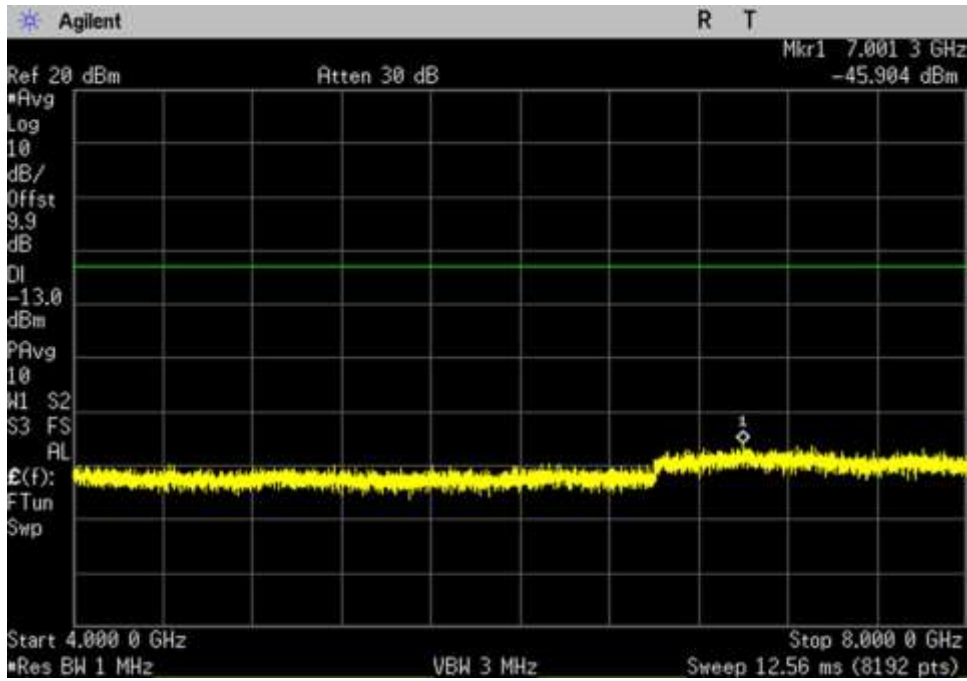


UL\_776-787\_ 4000- 8000MHz

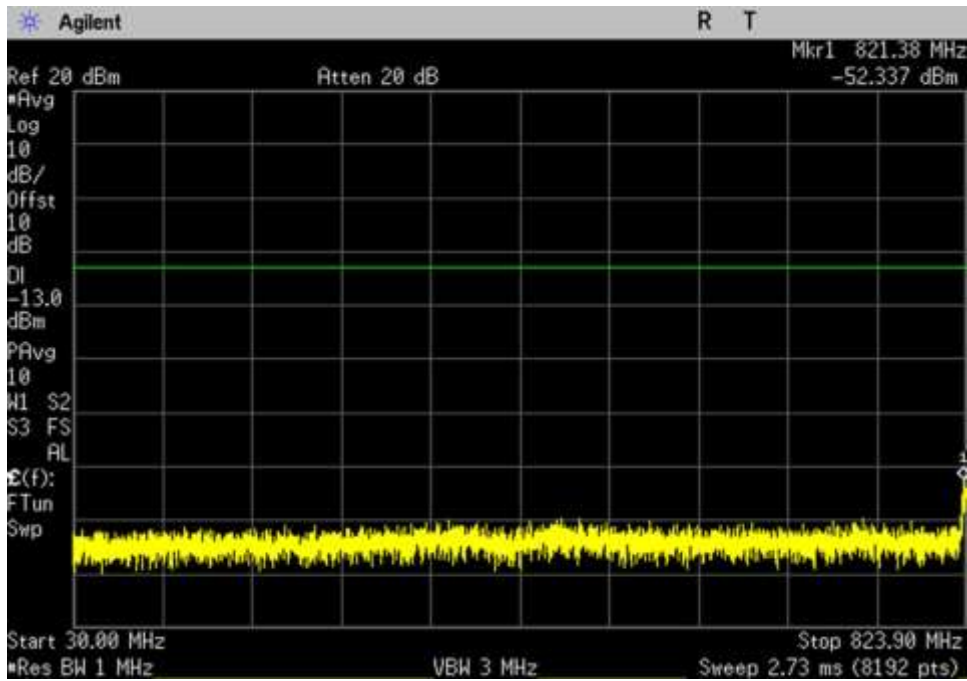


UL\_824-849\_ 30- 823.9MHz

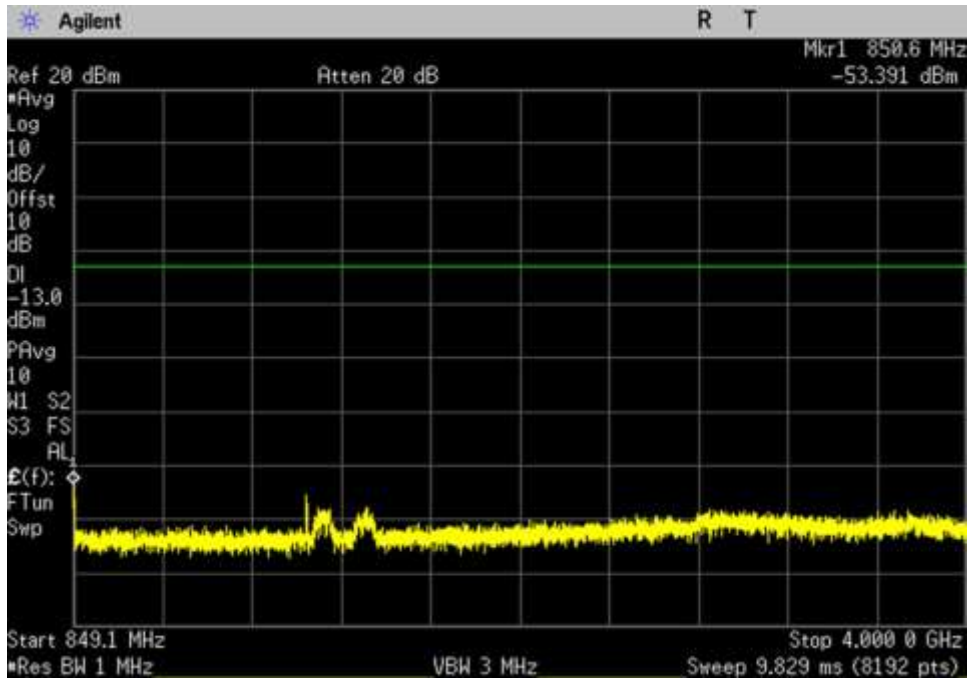


UL\_824-849\_ 849.1- 4000MHz

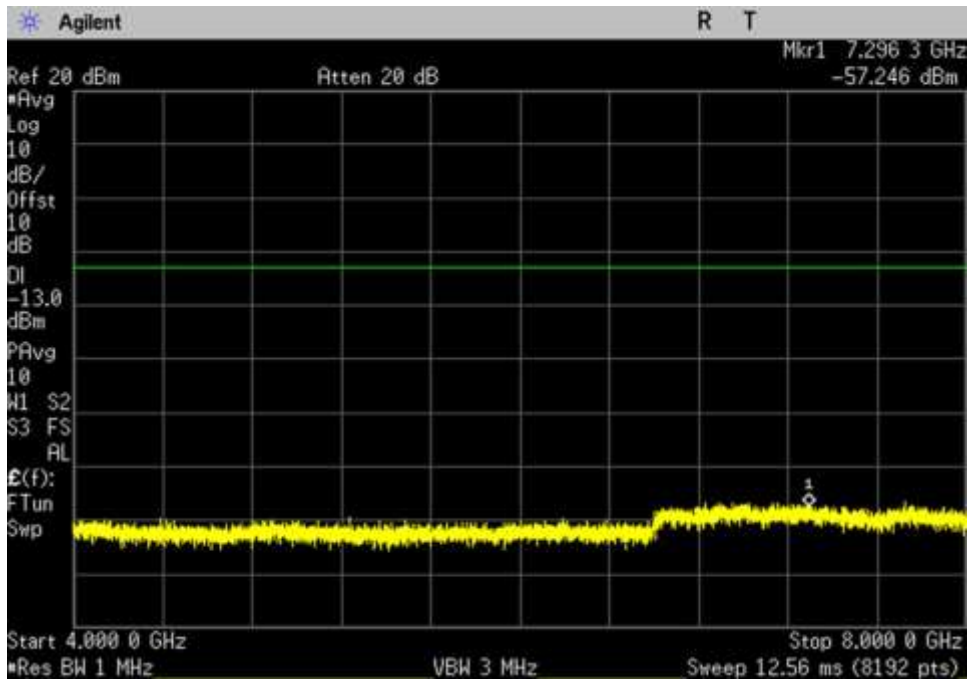


UL\_824-849\_ 4000- 8000MHz

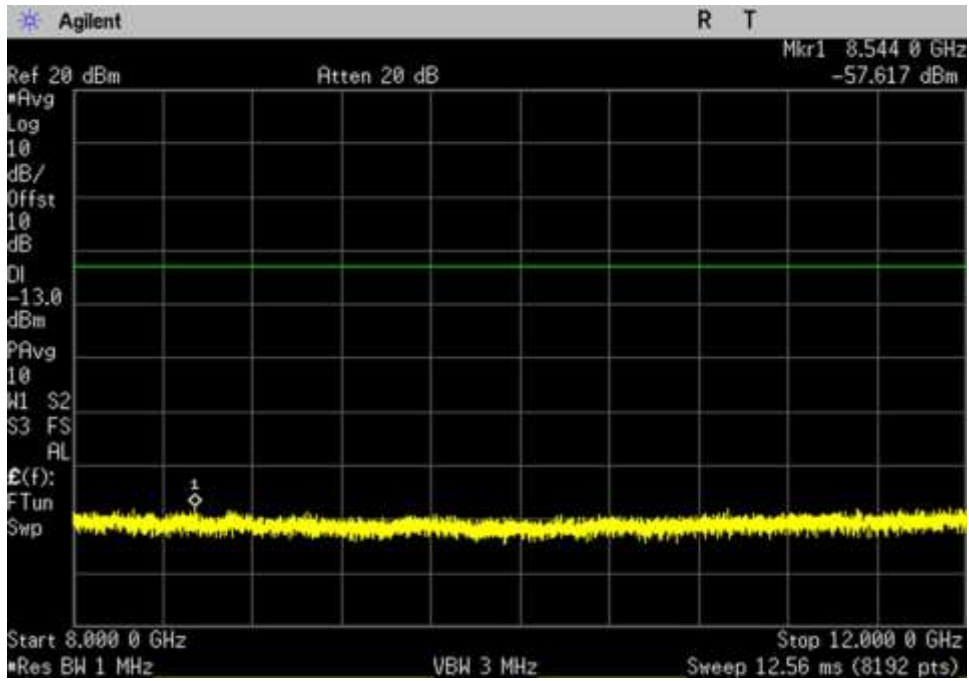


UL\_824-849\_ 8000- 12000MHz

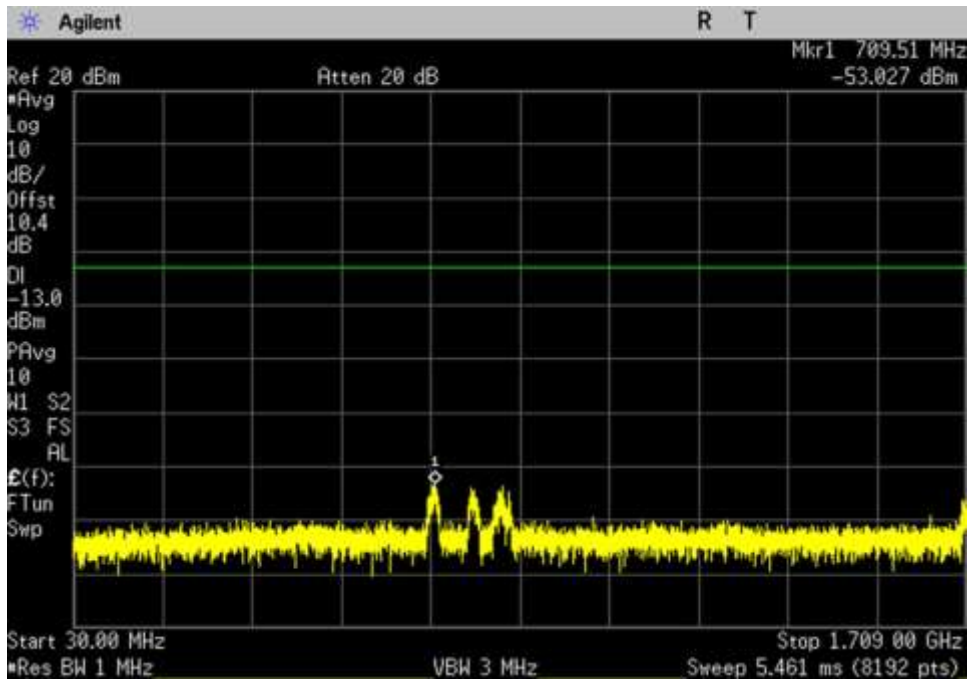


UL\_1710-1755\_ 30- 1709MHz

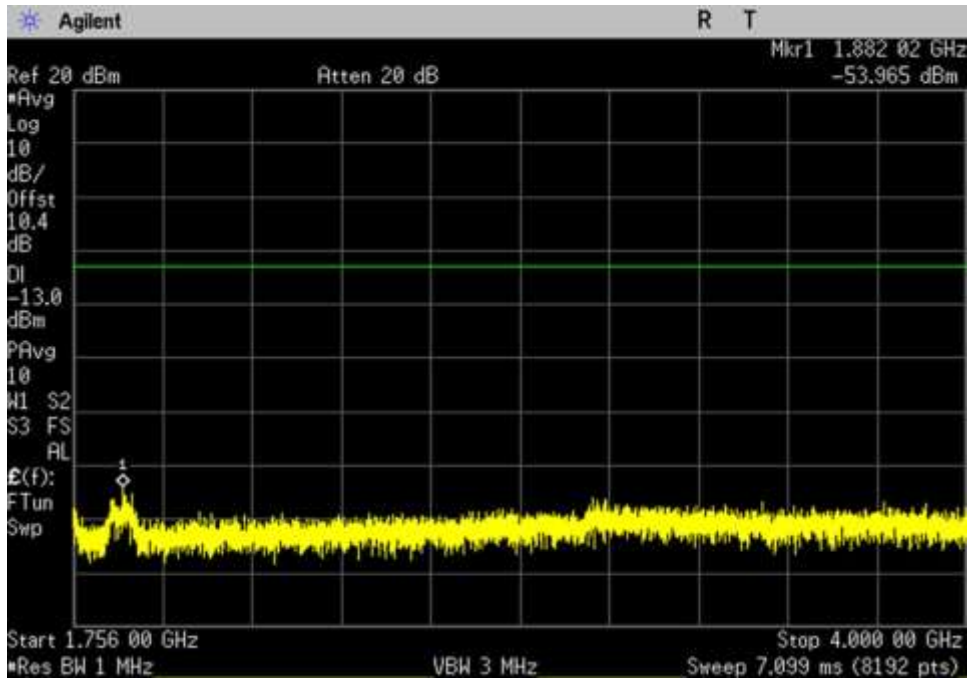


UL\_1710-1755\_ 1756- 4000MHz

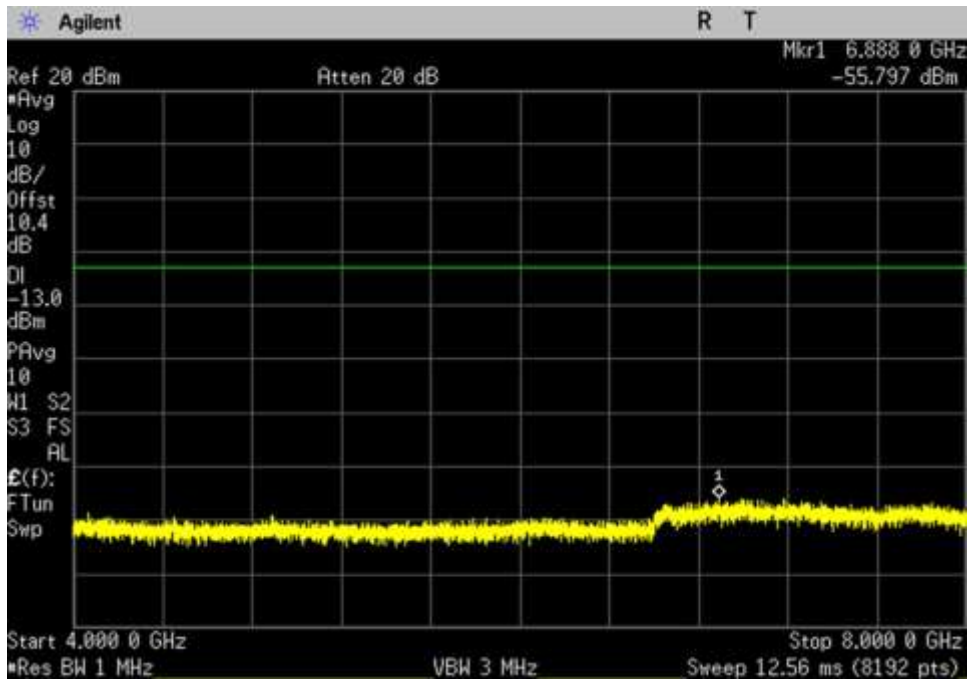

UL\_1710-1755\_ 4000- 8000MHz

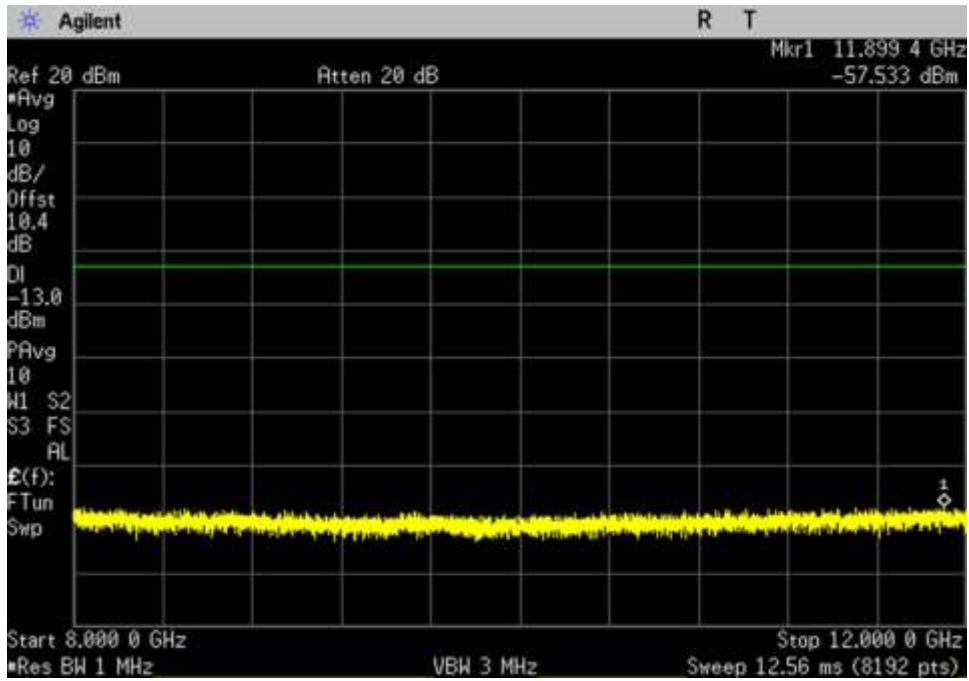


UL\_1710-1755\_ 8000- 12000MHz

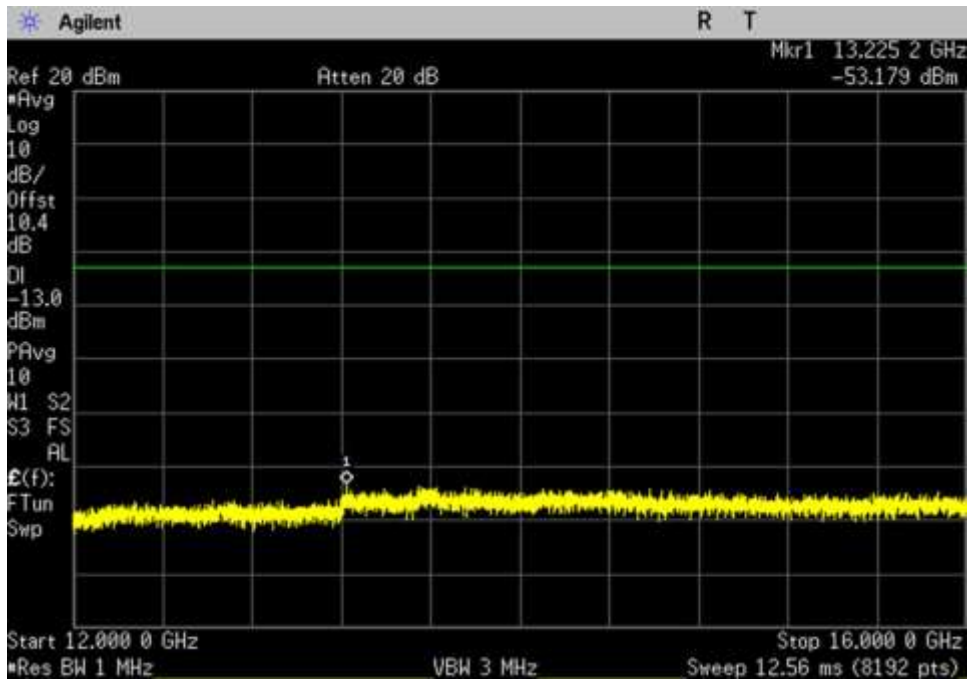


UL\_1710-1755\_ 12000- 16000MHz




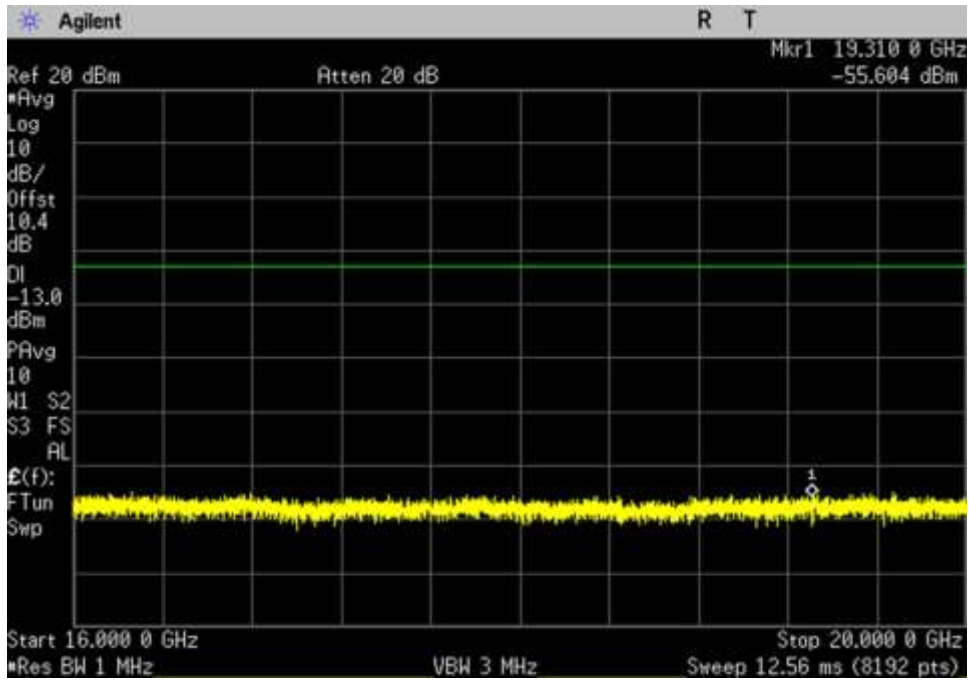


UL\_1710-1755\_ 16000- 20000MHz

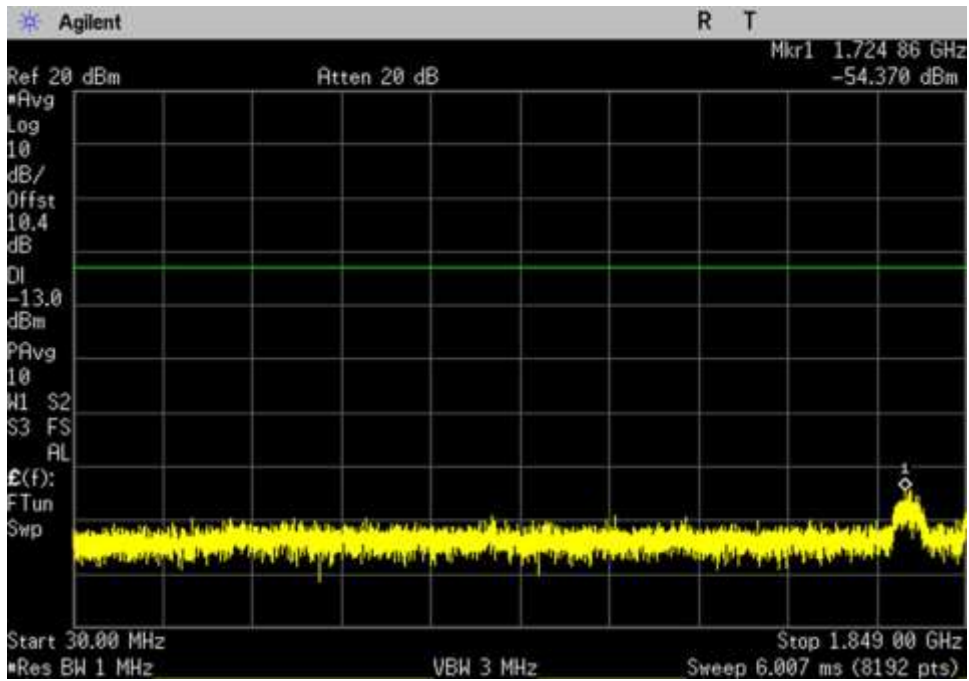


UL\_1850-1915\_ 30- 1849MHz

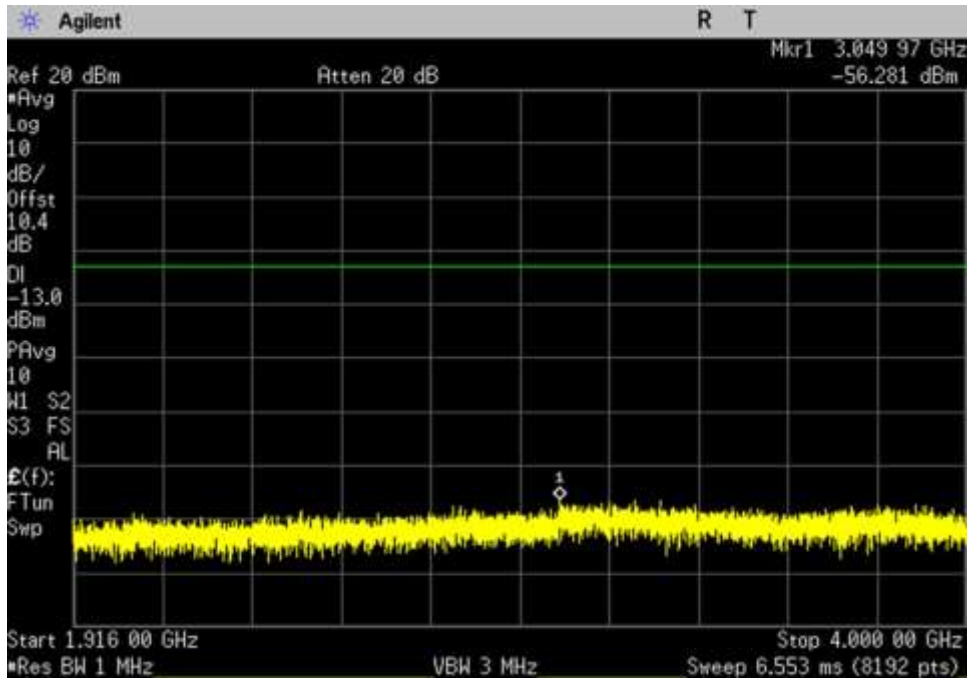


UL\_1850-1915\_ 1916- 4000MHz

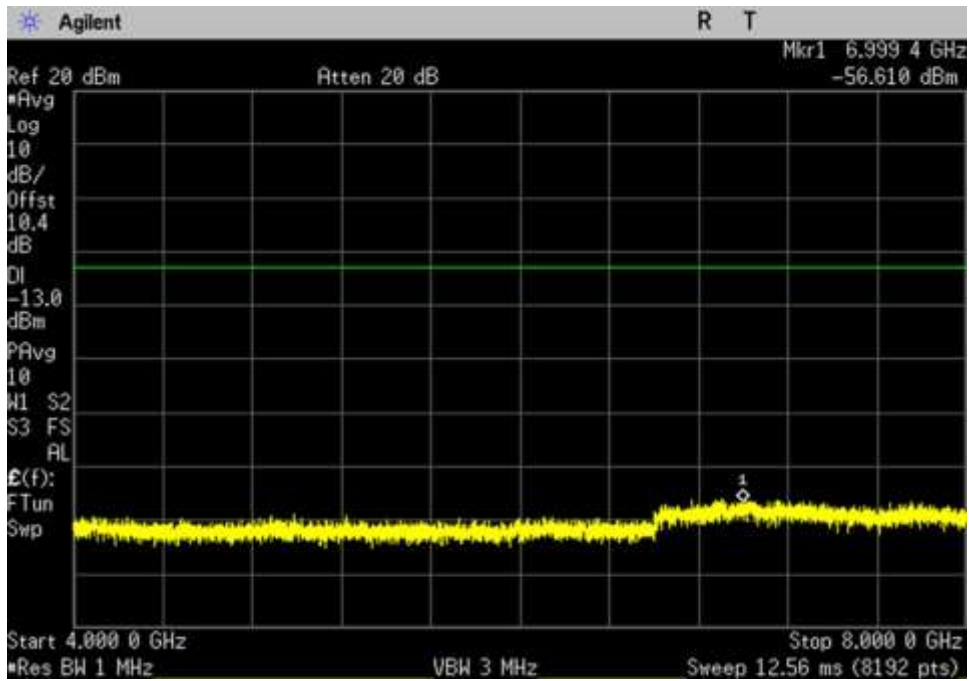


UL\_1850-1915\_ 4000- 8000MHz

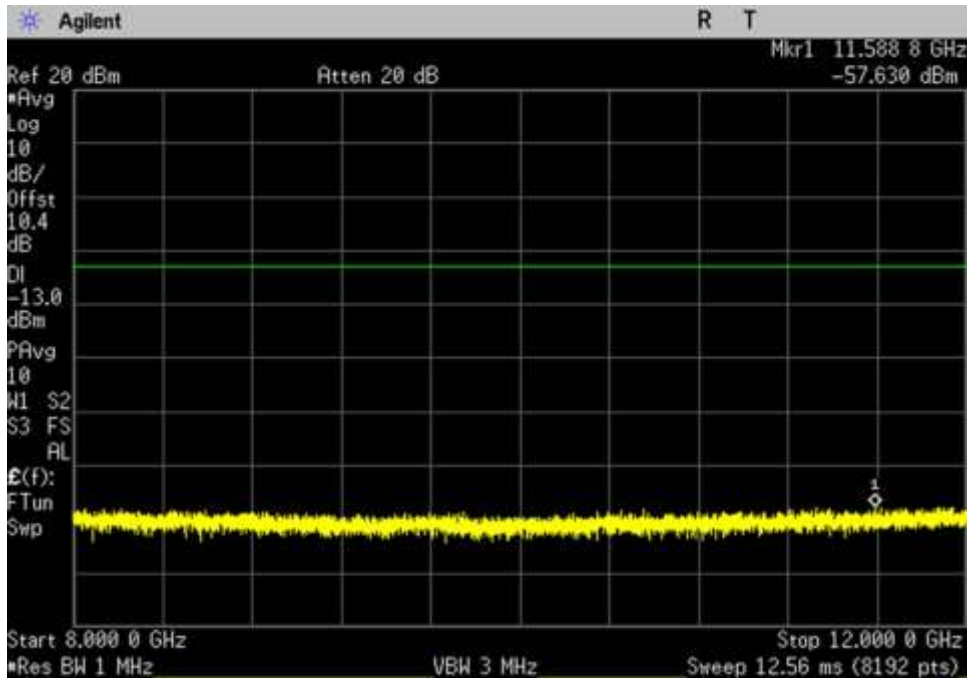


UL\_1850-1915\_ 8000- 12000MHz

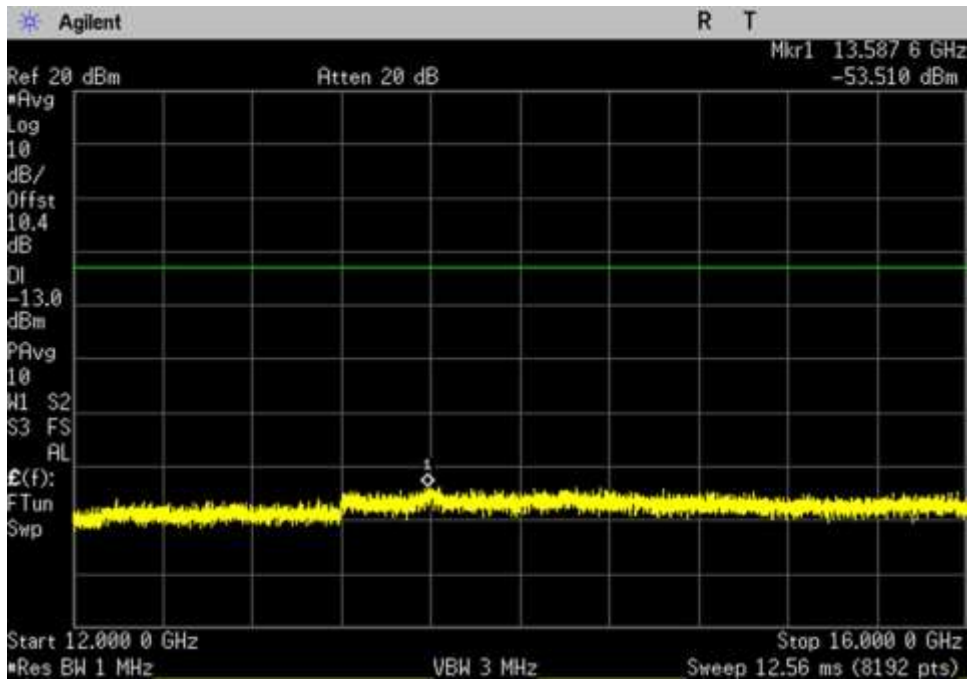


UL\_1850-1915\_ 12000- 16000MHz

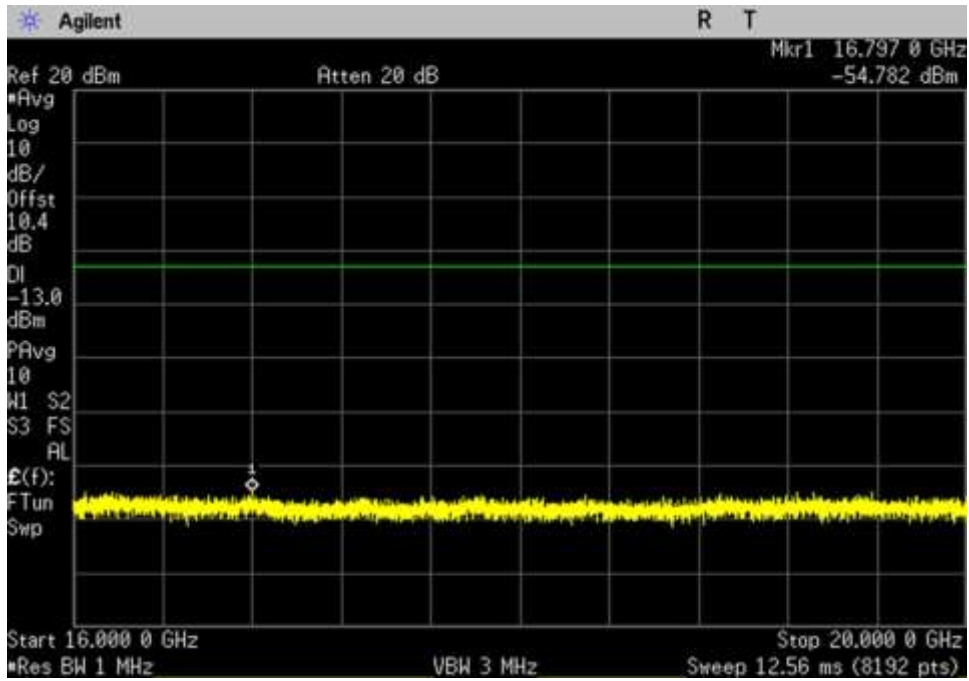


UL\_1850-1915\_16000-20000MHz

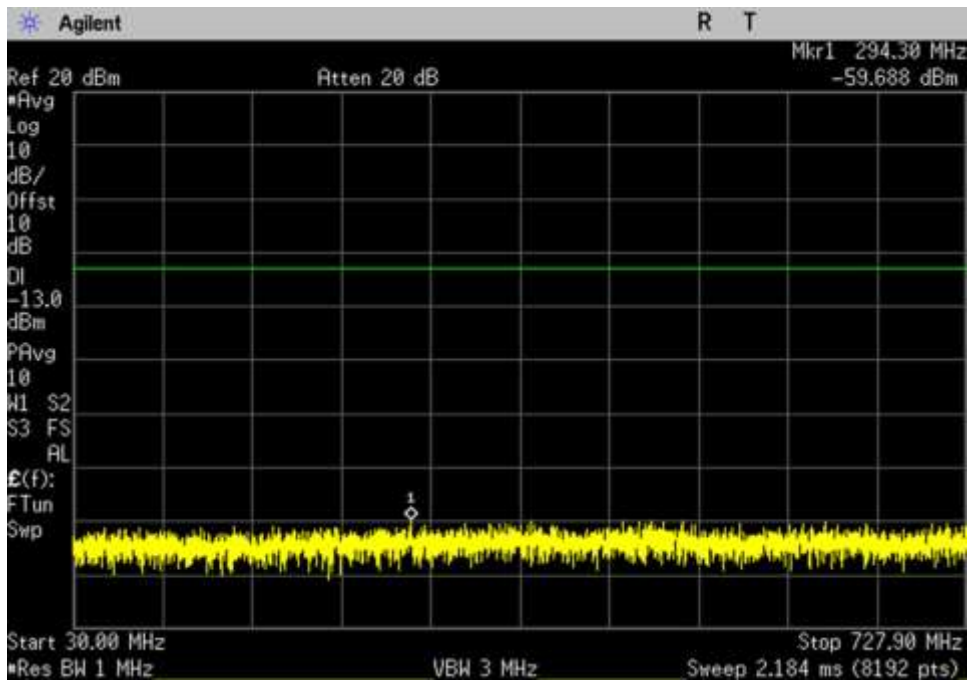


DL\_728-746\_30-727.9MHz

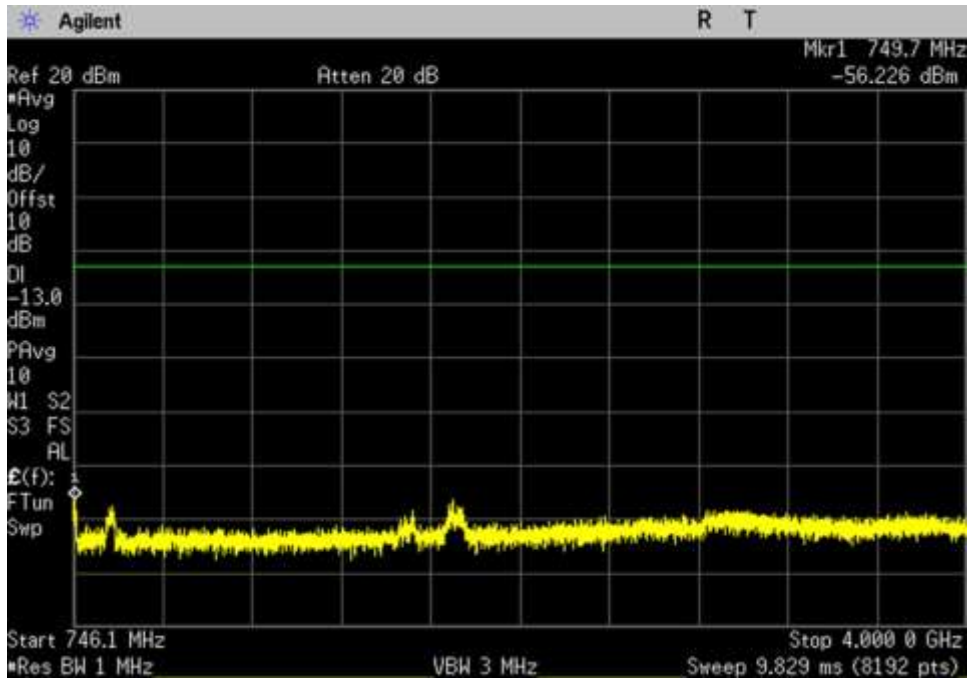


DL\_728-746\_ 746.1- 4000MHz

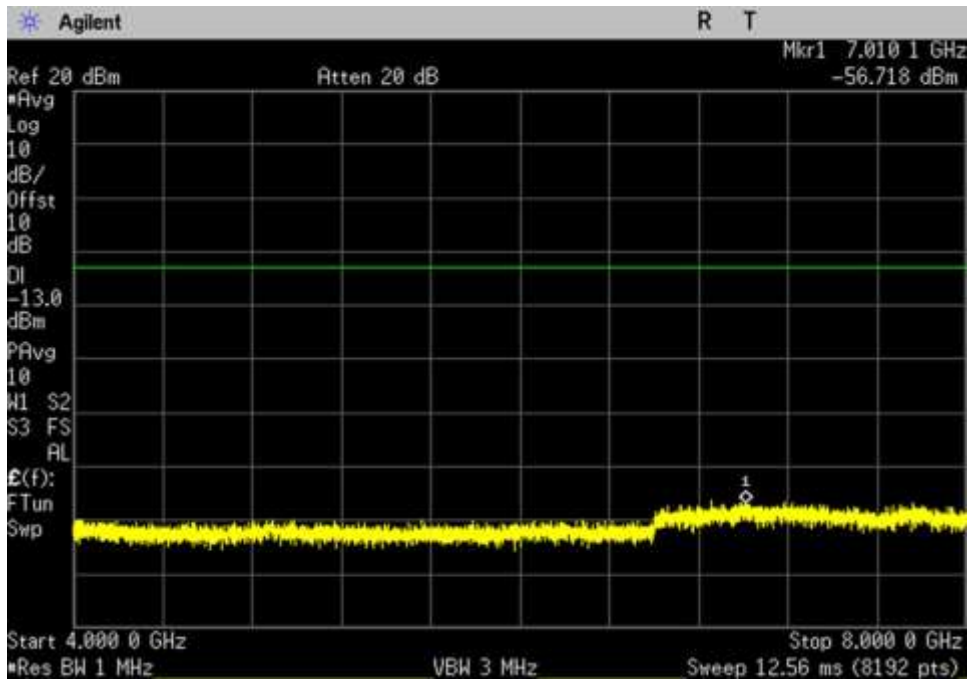


DL\_728-746\_ 4000- 8000MHz

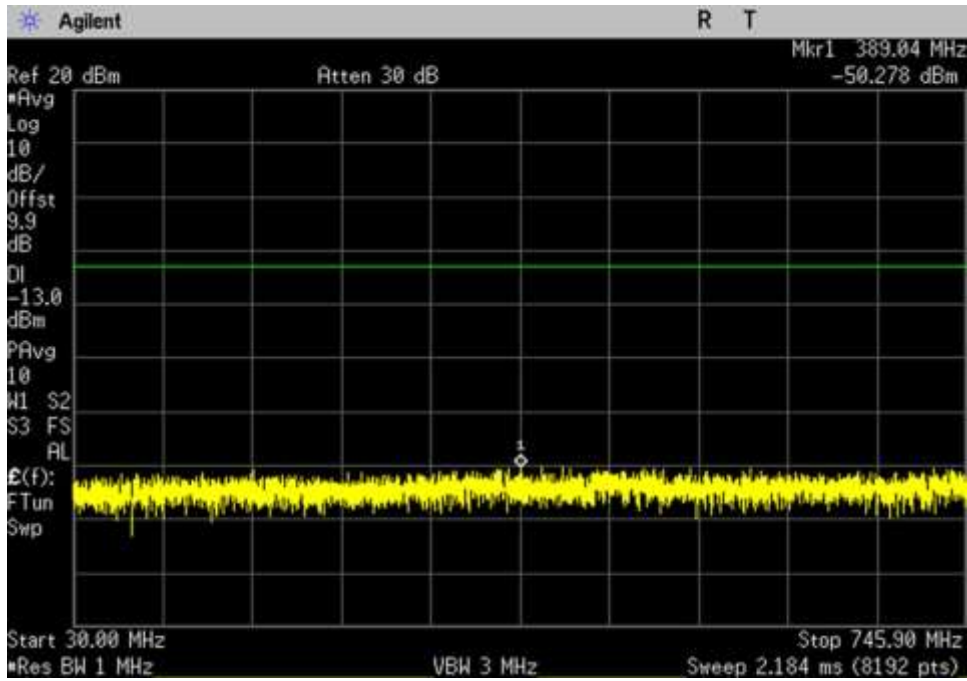


DL\_746-757\_ 30- 745.9MHz

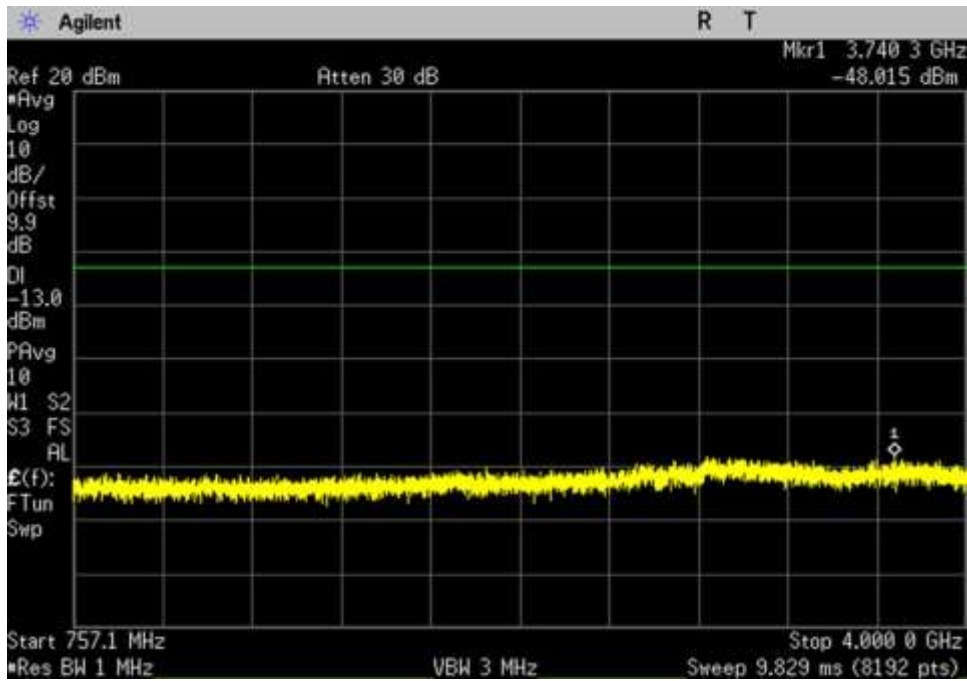

DL\_746-757\_ 757.1- 4000MHz

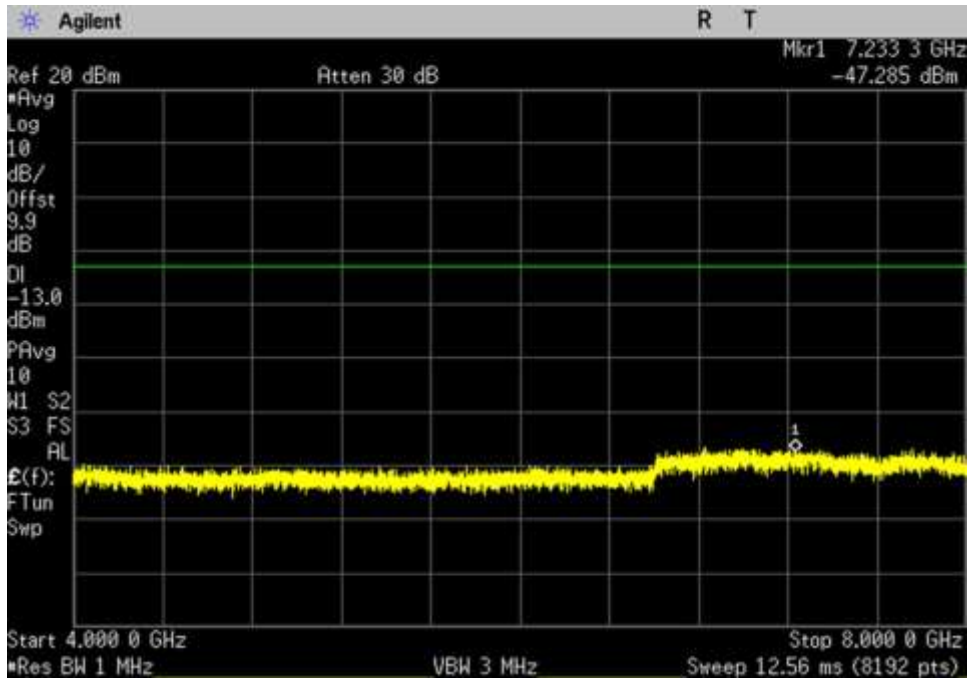


DL\_746-757\_ 4000- 8000MHz

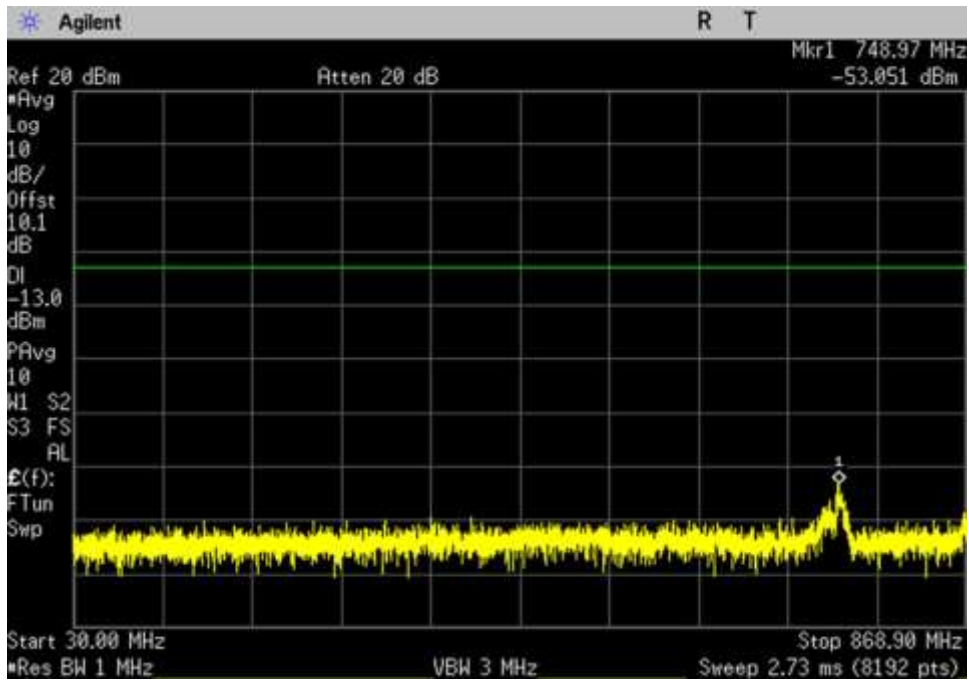


DL\_869-894\_ 30- 868.9MHz




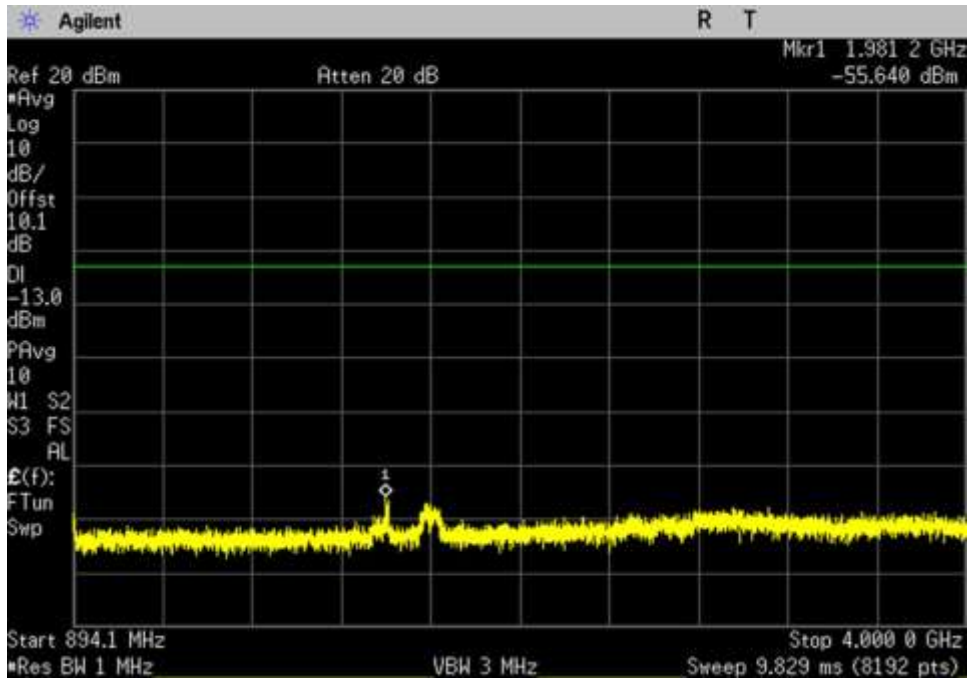


DL\_869-894\_ 894.1- 4000MHz

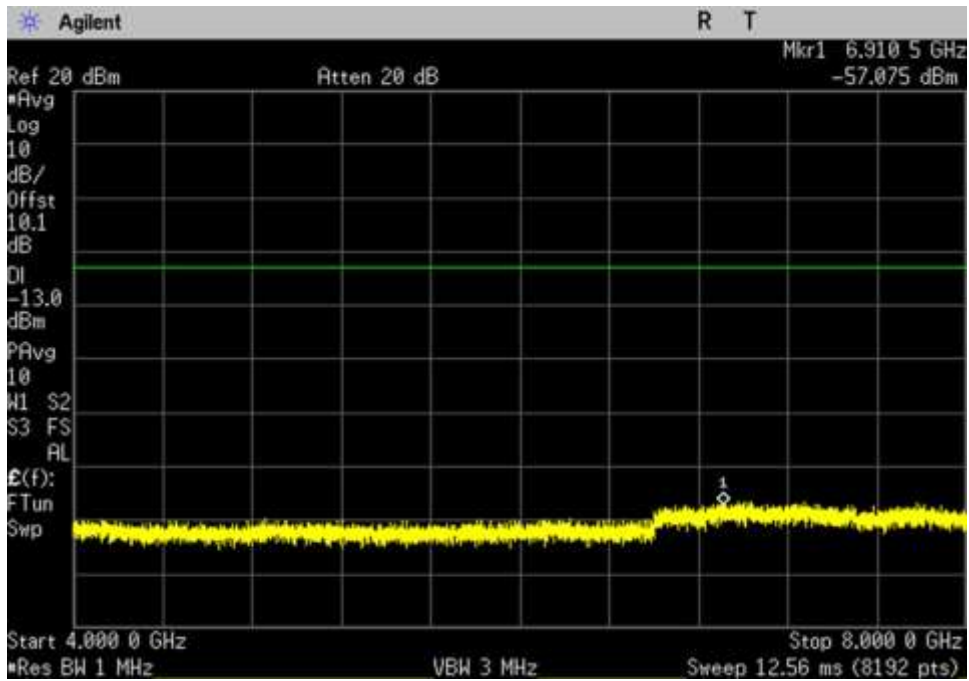


DL\_869-894\_ 4000- 8000MHz

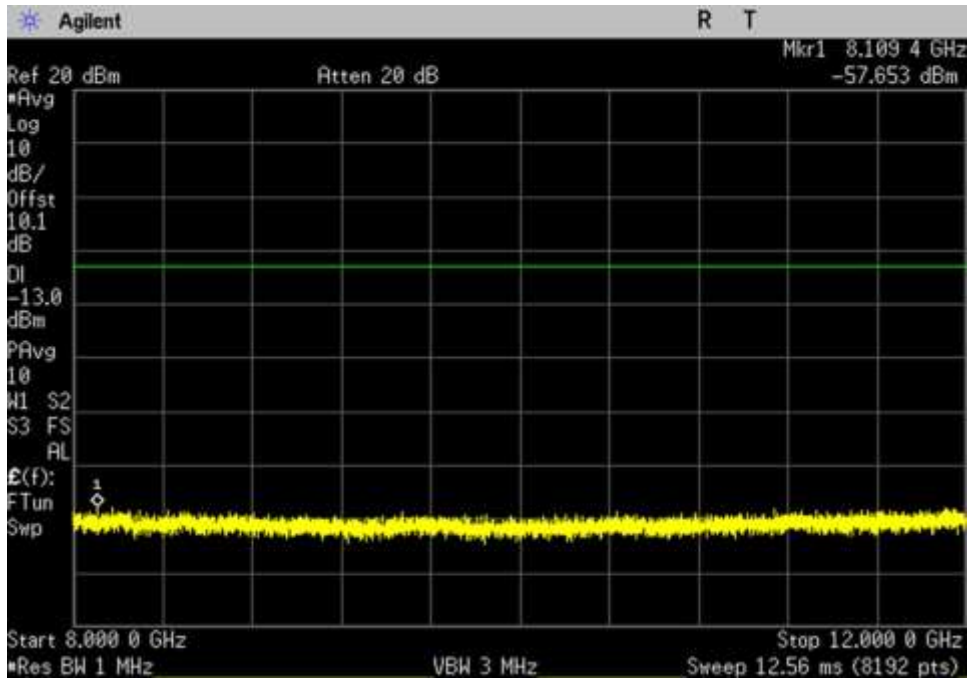


DL\_869-894\_ 8000- 12000MHz

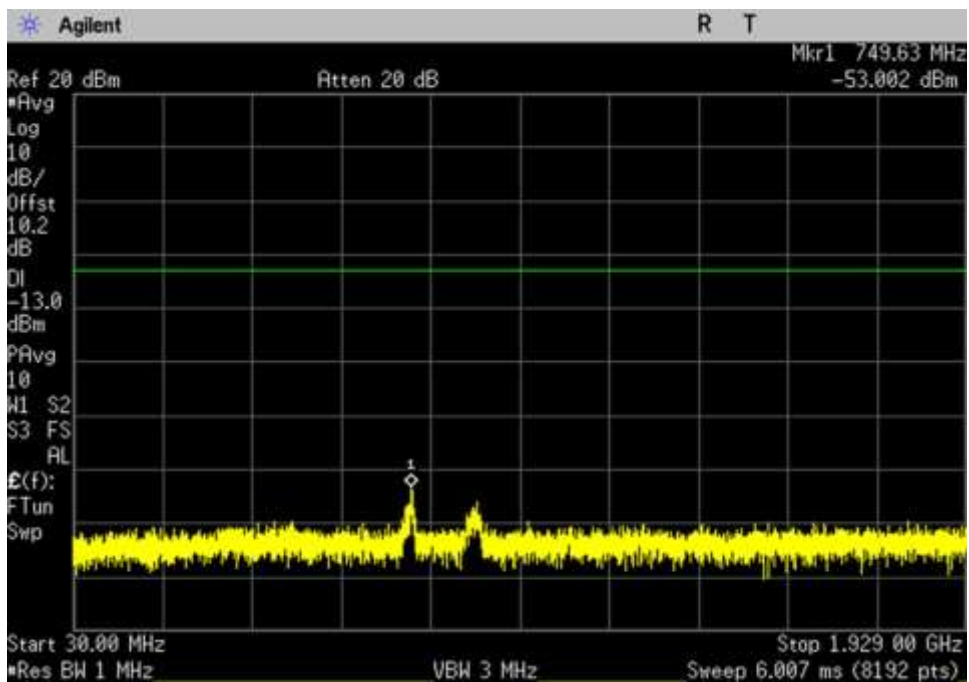


DL\_1930-1995\_ 30- 1929MHz

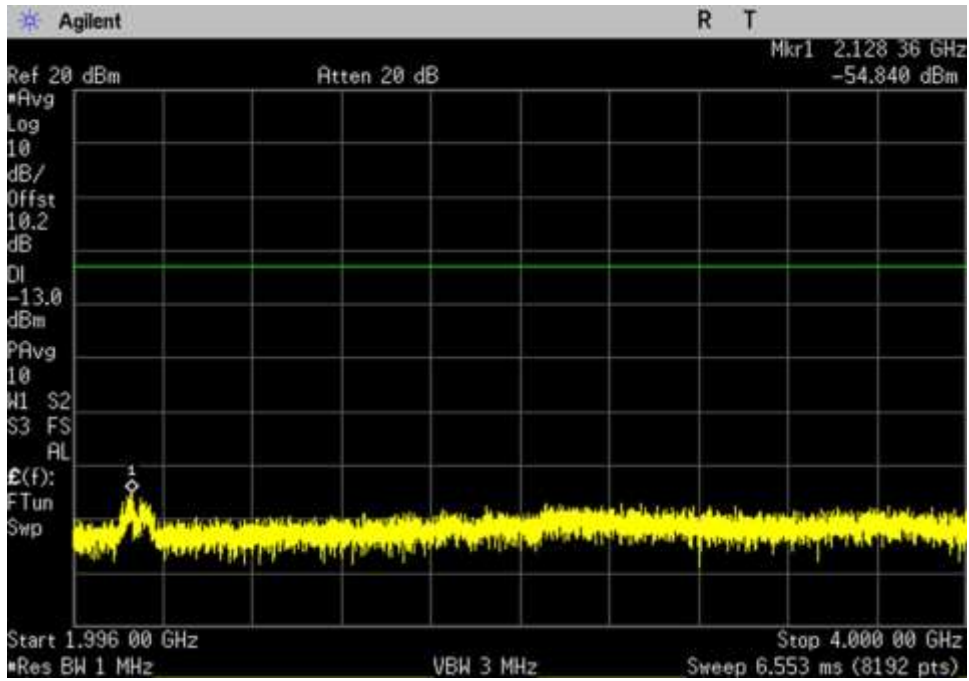


DL\_1930-1995\_ 1996- 4000MHz

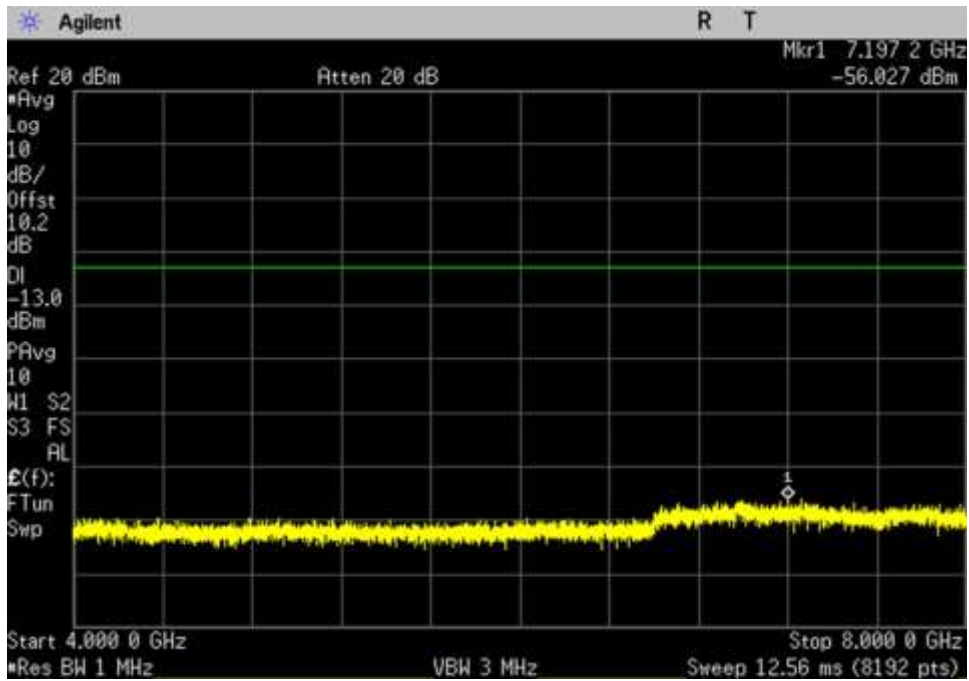


DL\_1930-1995\_ 4000- 8000MHz

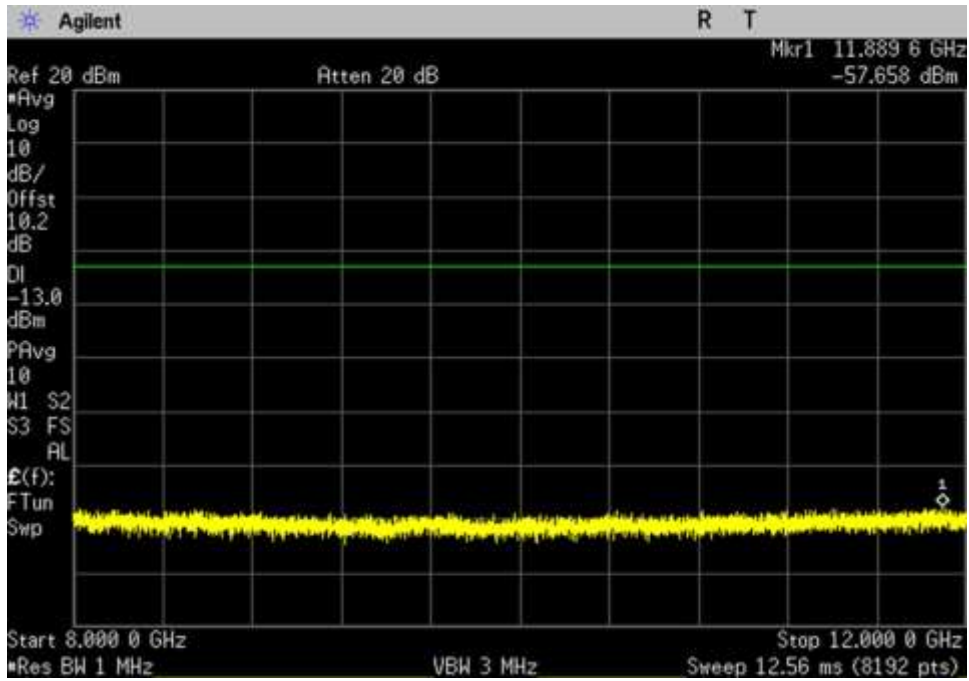


DL\_1930-1995\_ 8000- 12000MHz

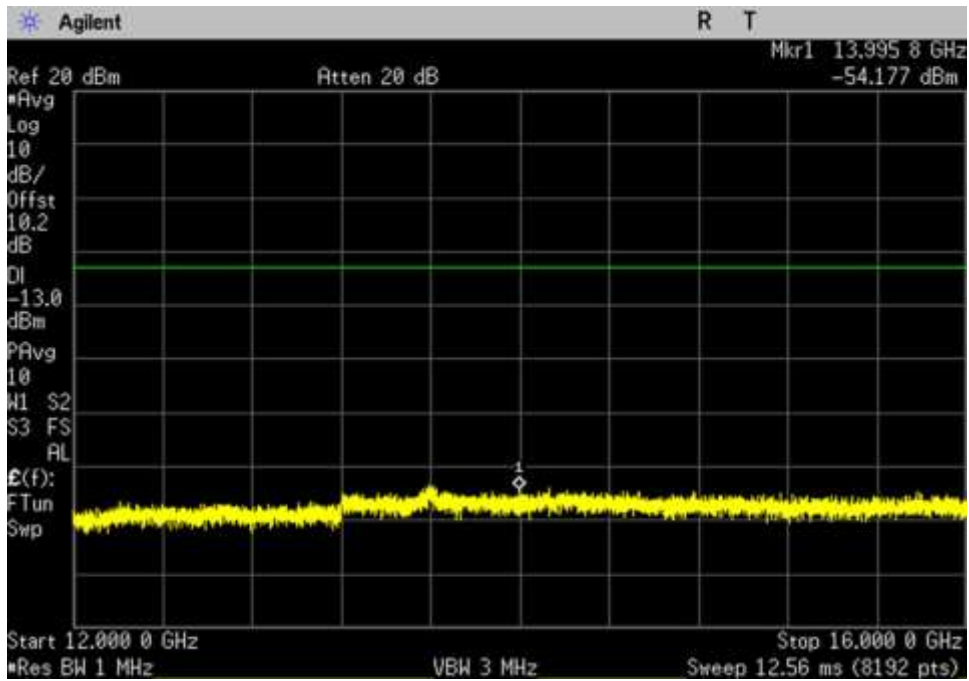


DL\_1930-1995\_ 12000- 16000MHz

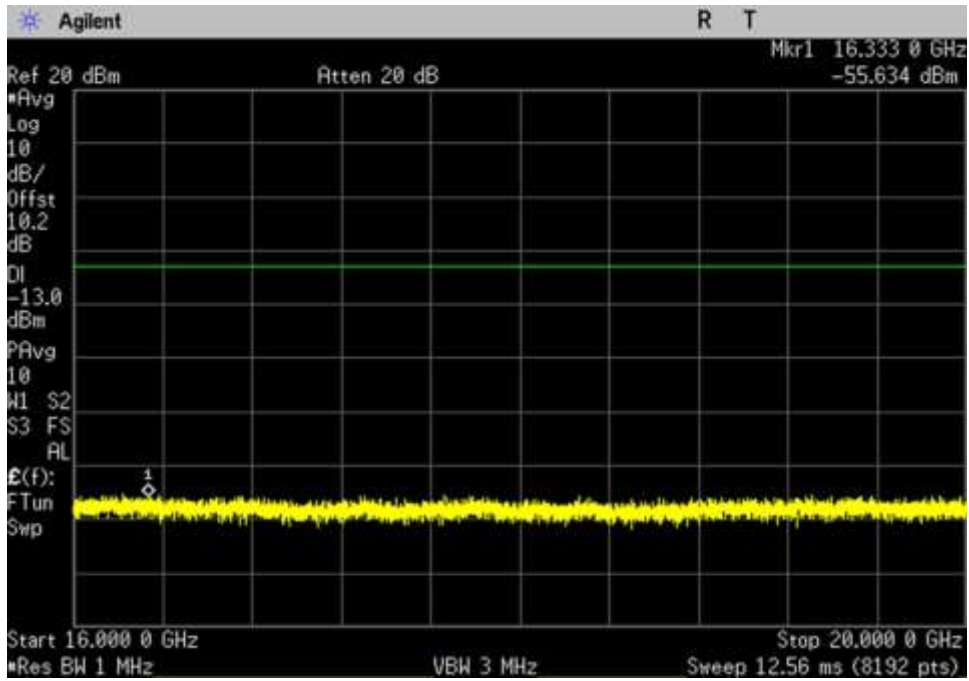


DL\_1930-1995\_ 16000- 20000MHz

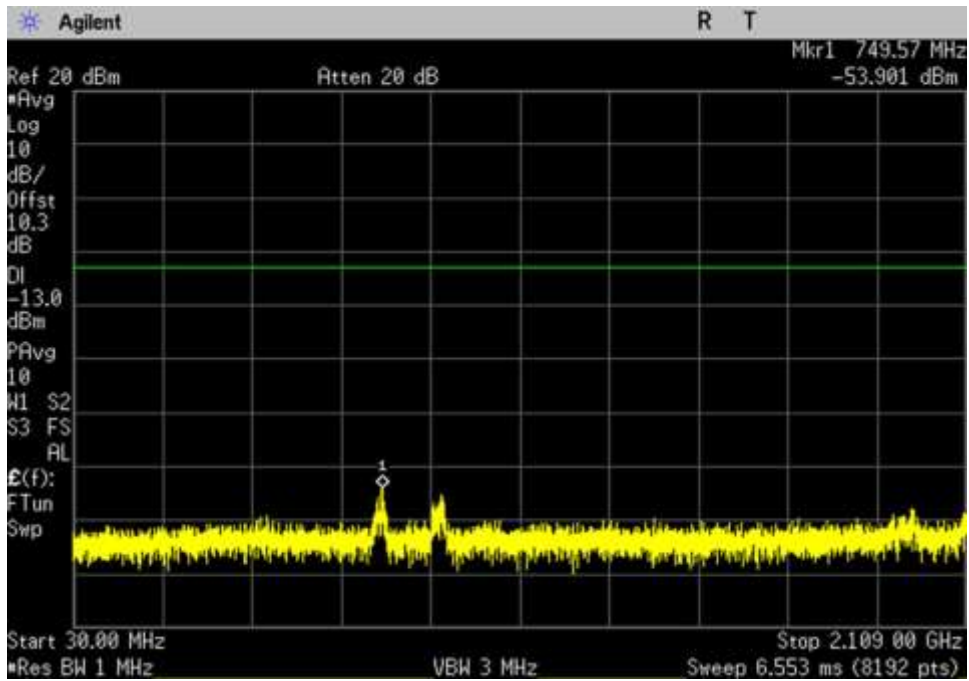


DL\_2110-2155\_ 30- 2109MHz

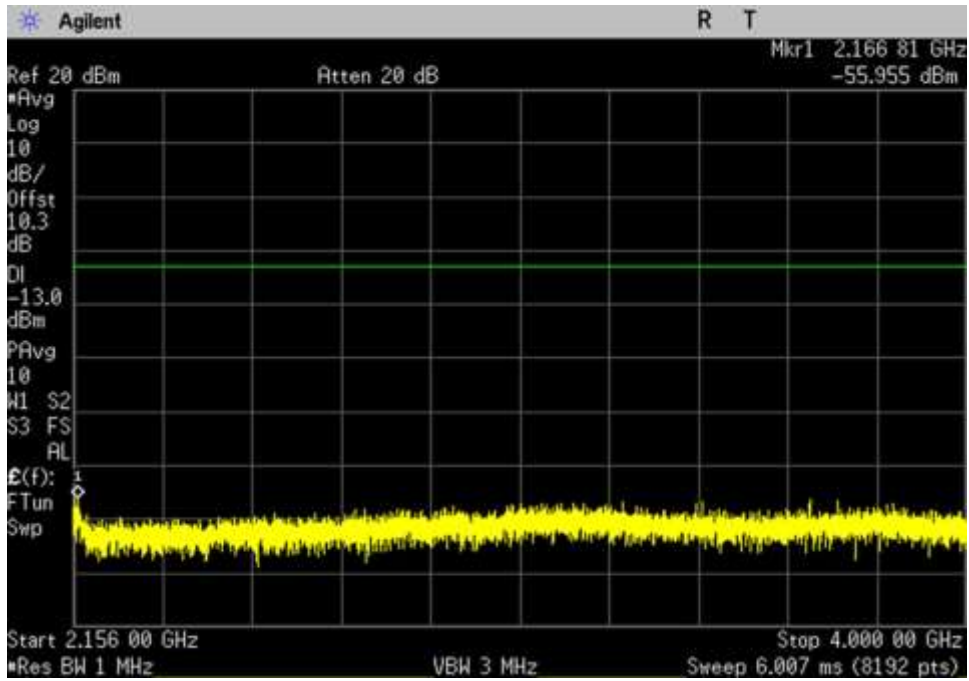


DL\_2110-2155\_ 2156- 4000MHz

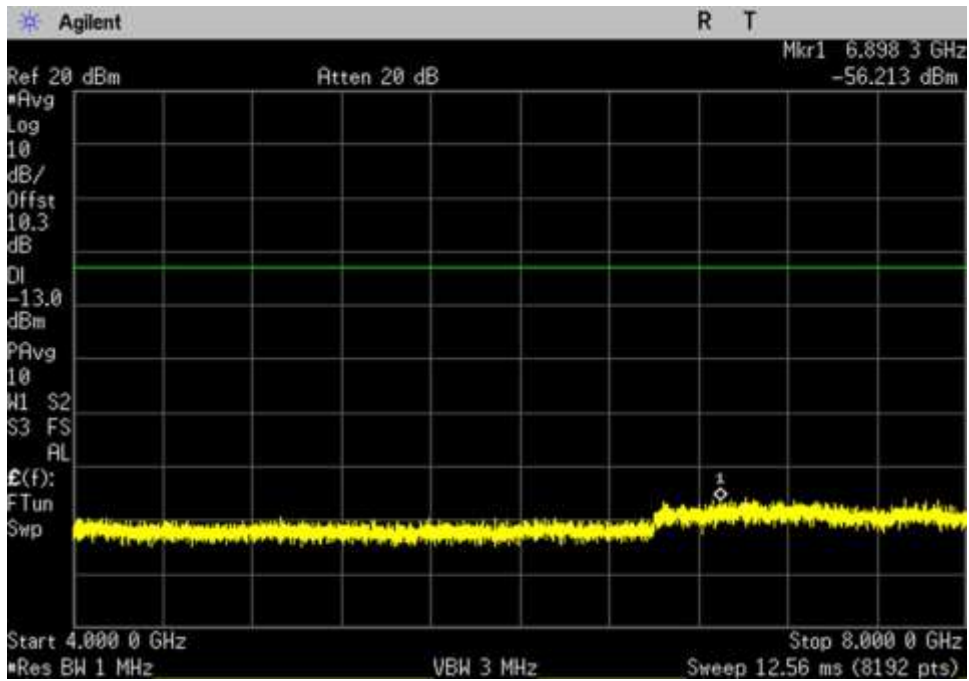

DL\_2110-2155\_ 4000- 8000MHz

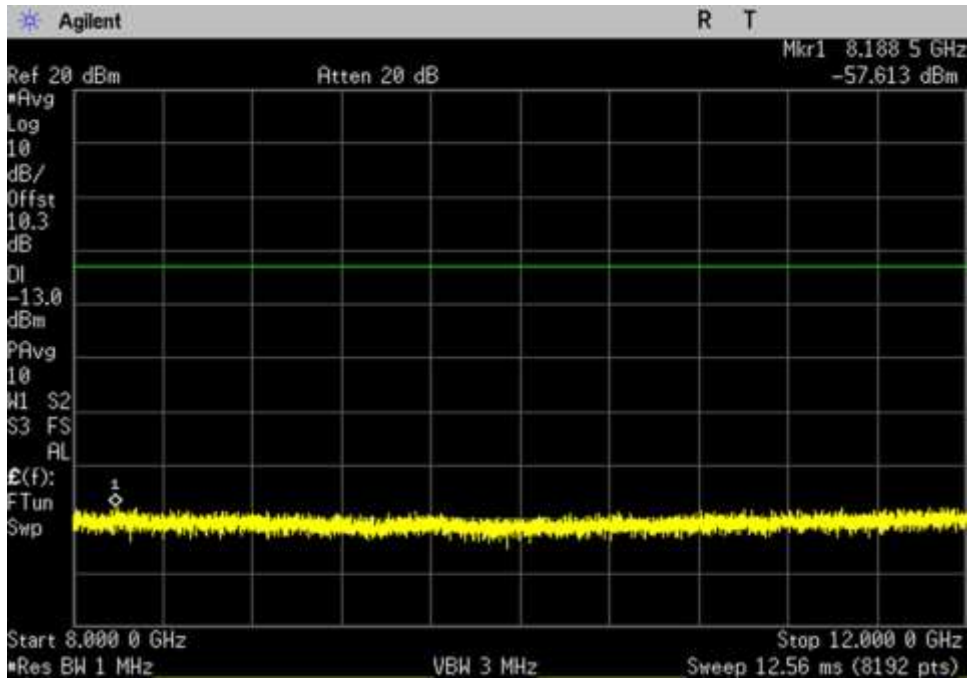


DL\_2110-2155\_ 8000- 12000MHz

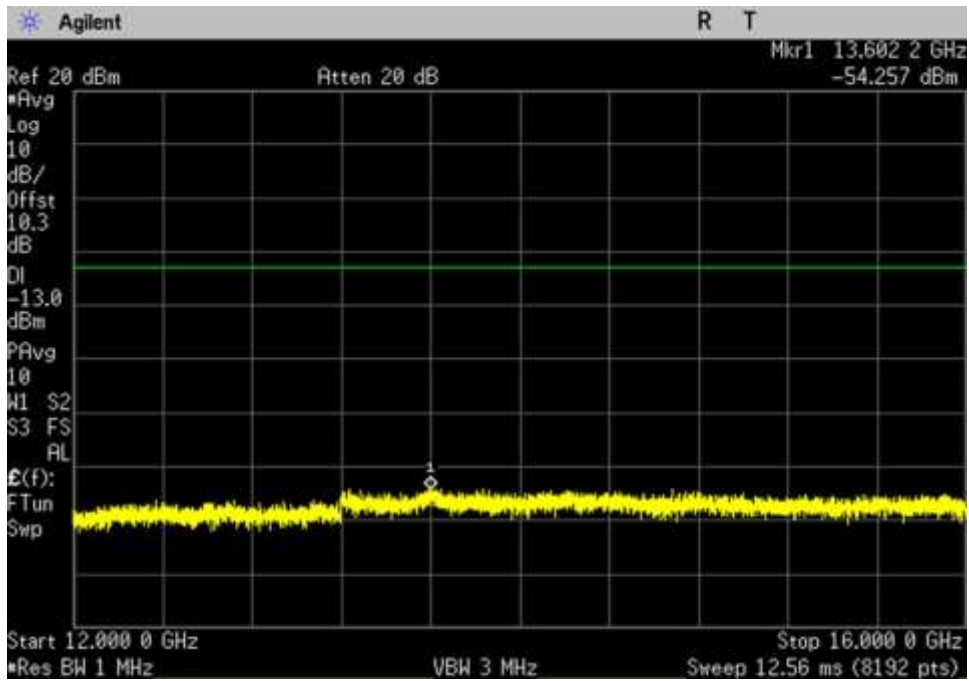


DL\_2110-2155\_ 12000- 16000MHz



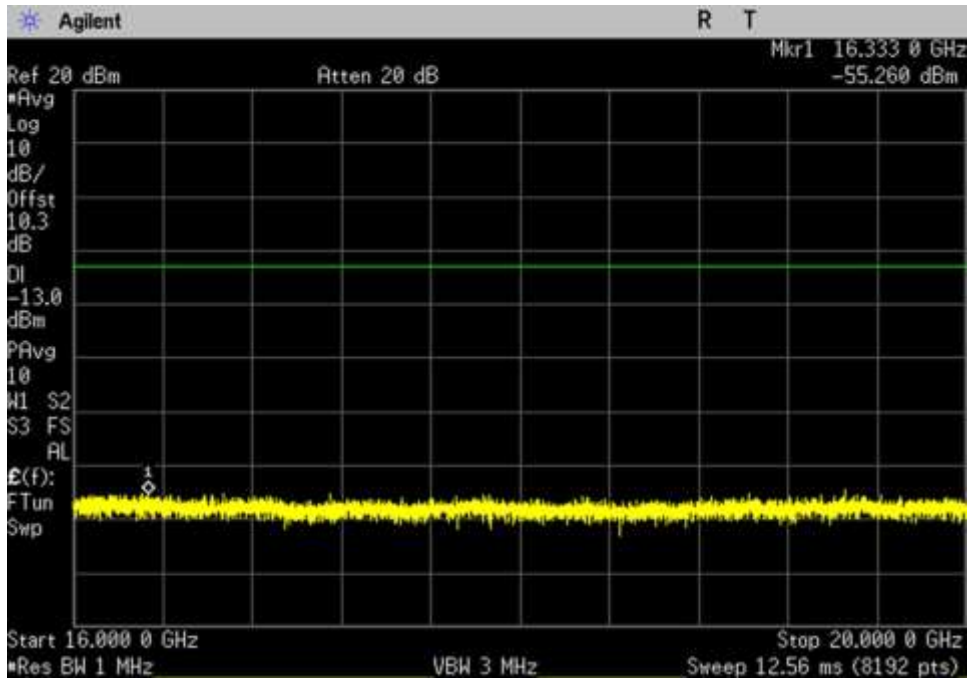

DL\_2110-2155\_ 16000- 20000MHz

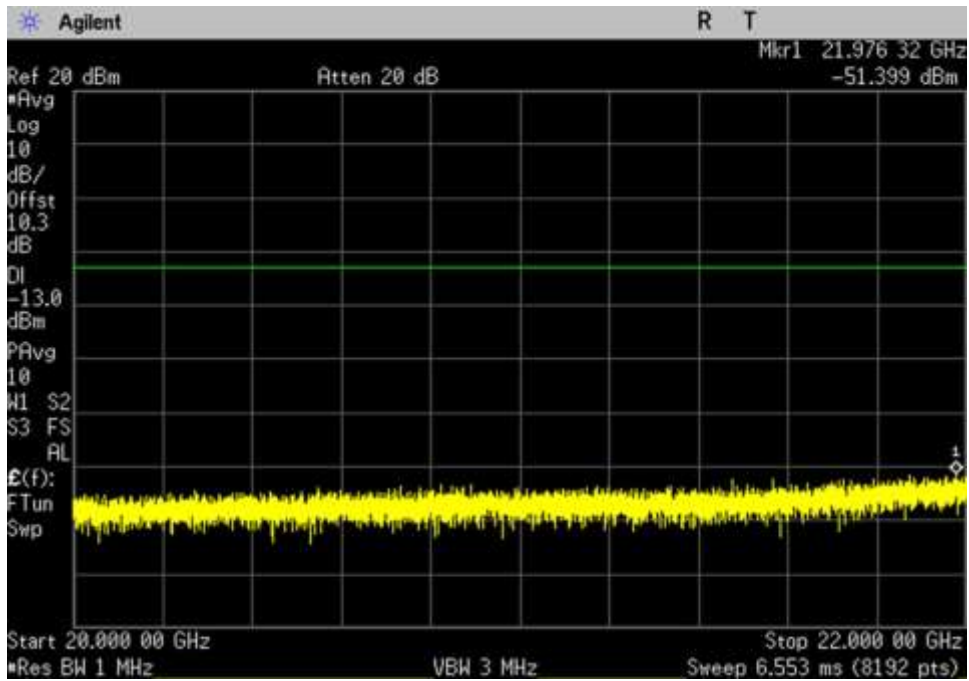

DL\_2110-2155\_ 20000- 22000MHz

## 7.7 Noise limit

### Test Conditions / Setup

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170  
 Customer: Cellphone-Mate, Inc.  
 Specification: **7.7 Noise Limit (Maximum Transmitter Noise Power Level / Variable UL Noise Timing)**  
 Work Order #: **102180** Date: 01/28/2019  
 Test Type: **Conducted Emissions**  
 Tested By: **Hieu Song Nguyenpham**  
 Software: EMITest 5.03.11

**Equipment Tested:**

Device	Manufacturer	Model #	S/N
Configuration 1			

**Support Equipment:**

Device	Manufacturer	Model #	S/N
Configuration 1			

**Test Conditions / Notes:**

Test environment conditions: Temperature: 20.5°C, 38% relative humidity, Pressure: 102.2kPa  
 Modification #1 was in place during testing.

**Test Equipment:**

Asset #	Description	Manufacturer	Model	Calibration Date	Cal Due Date
P07192	Cable	Astro	32022-29094K-29094K-48TC	10/9/2017	10/9/2019
P07191	Cable	Astro	32022-29094K-29094K-48TC	10/30/2017	10/30/2019
03418	Signal Generator	Agilent	E4438C	6/19/2017	6/19/2019
03471	Spectrum Analyzer	Agilent	E4440A	1/18/2018	1/18/2020
C00082	Directional Coupler	MECA Electronics, Inc.	722-10-1.500V	9/18/2017	9/18/2019