




Mode	CB (MHz)	Modulation	Channel	Frequency (MHz)	Peak to Average ratio (dB)
LTE Band 4	10	QPSK	20000	1715.0	5.62
LTE Band 4	10	QPSK	20175	1732.5	5.19
LTE Band 4	10	QPSK	20350	1750.0	5.36
LTE Band 4	10	16QAM	20000	1715.0	6.41
LTE Band 4	10	16QAM	20175	1732.5	6.00
LTE Band 4	10	16QAM	20350	1750.0	6.26

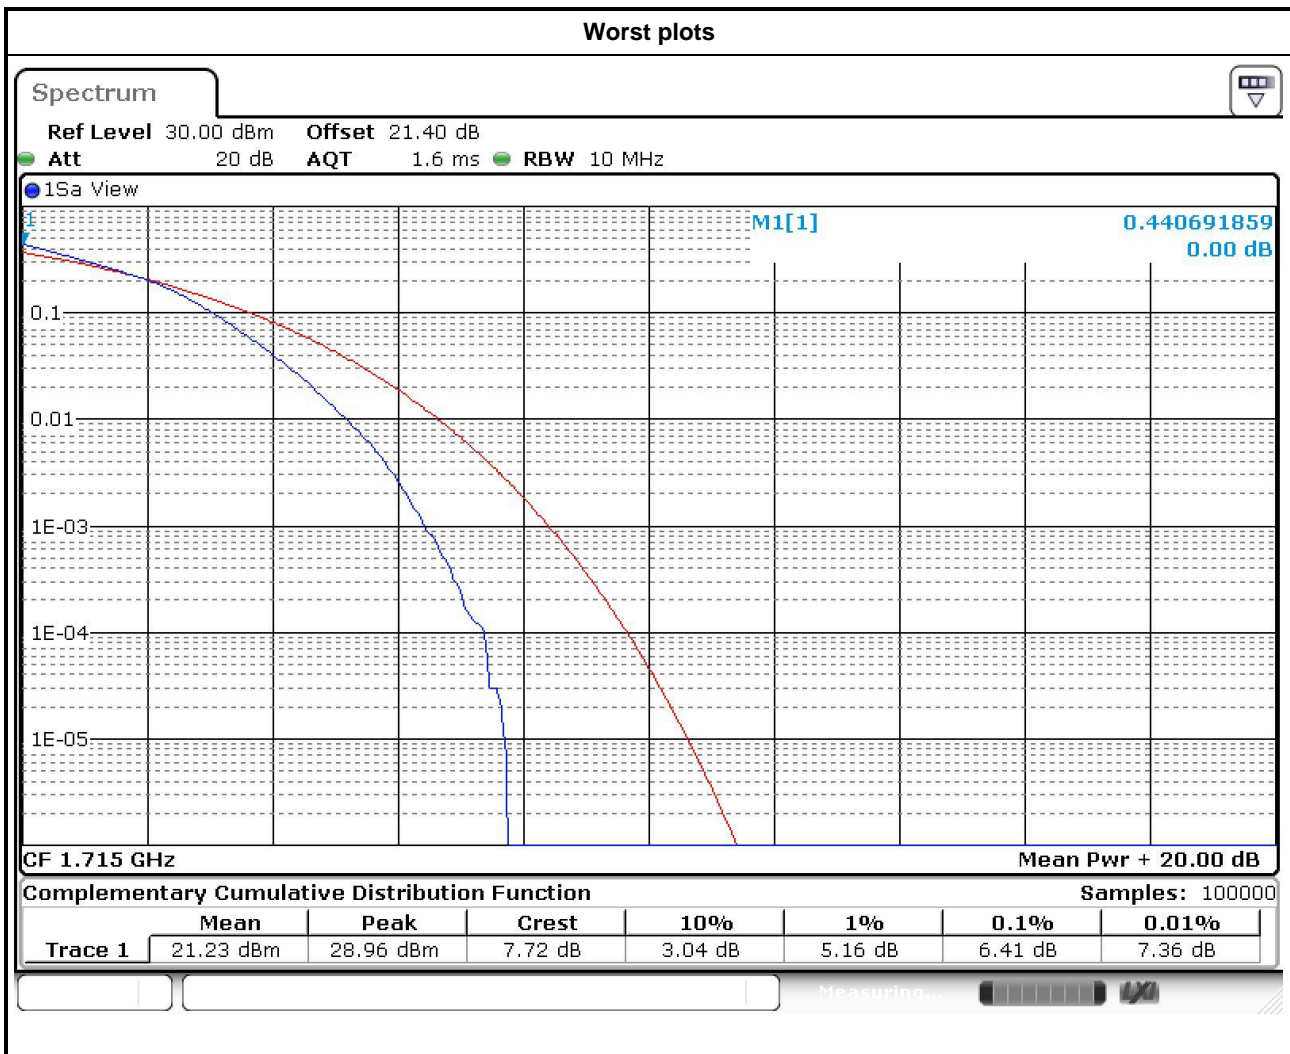

Mode	CB (MHz)	Modulation	Channel	Frequency (MHz)	Peak to Average ratio (dB)
LTE Band 4	15	QPSK	20025	1717.5	5.68
LTE Band 4	15	QPSK	20175	1732.5	5.25
LTE Band 4	15	QPSK	20325	1747.5	5.28
LTE Band 4	15	16QAM	20025	1717.5	6.29
LTE Band 4	15	16QAM	20175	1732.5	6.06
LTE Band 4	15	16QAM	20325	1747.5	6.17

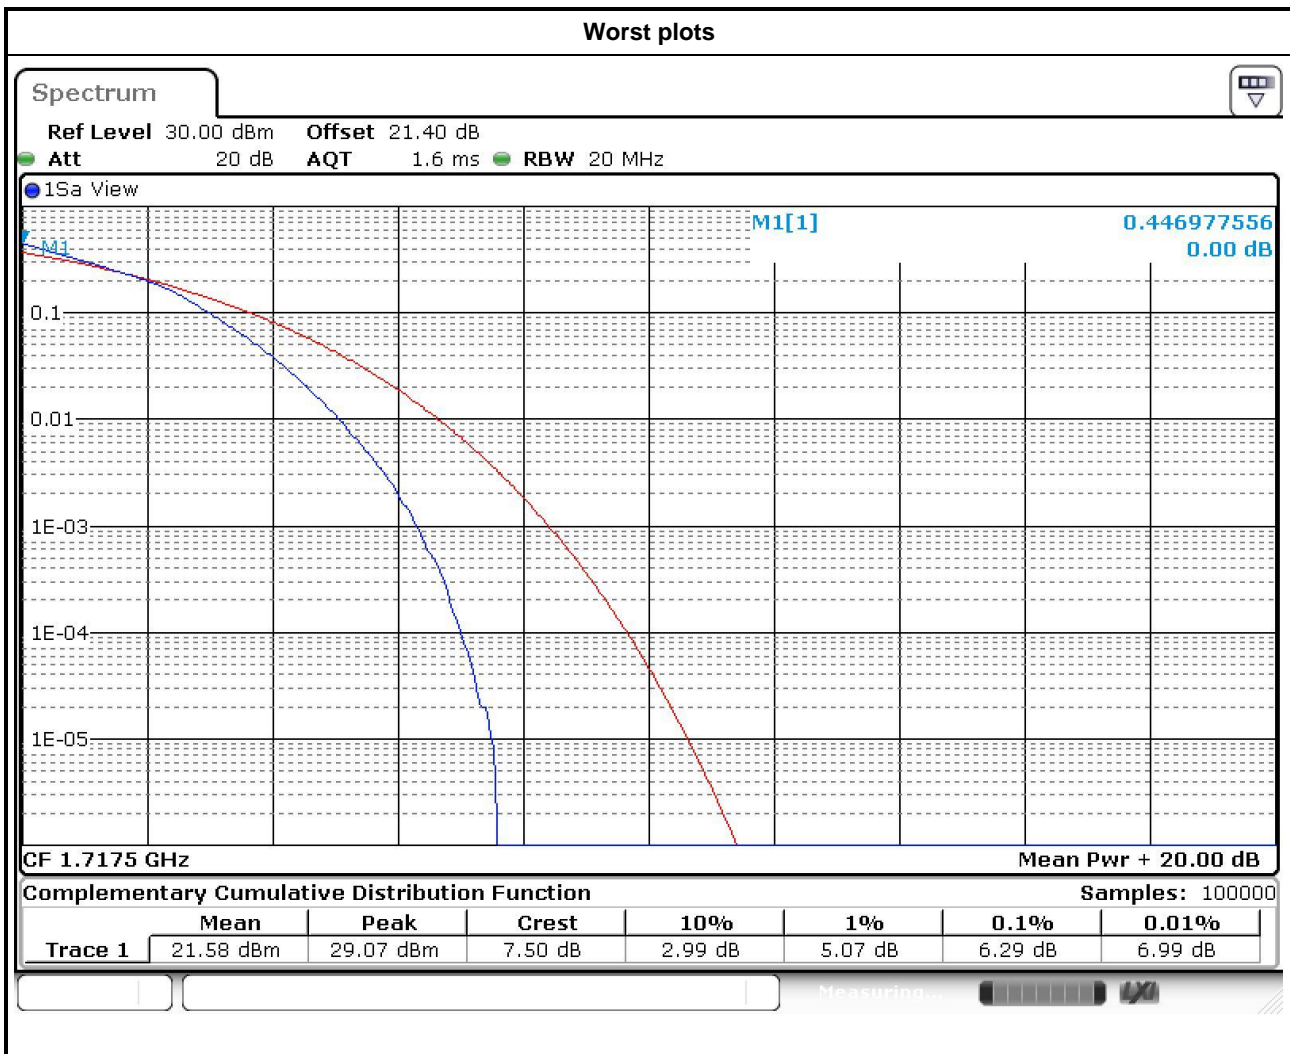

Mode	CB (MHz)	Modulation	Channel	Frequency (MHz)	Peak to Average ratio (dB)
LTE Band 4	20	QPSK	20050	1720.0	5.54
LTE Band 4	20	QPSK	20175	1732.5	5.10
LTE Band 4	20	QPSK	20300	1745.0	5.13
LTE Band 4	20	16QAM	20050	1720.0	6.32
LTE Band 4	20	16QAM	20175	1732.5	6.09
LTE Band 4	20	16QAM	20300	1745.0	6.06

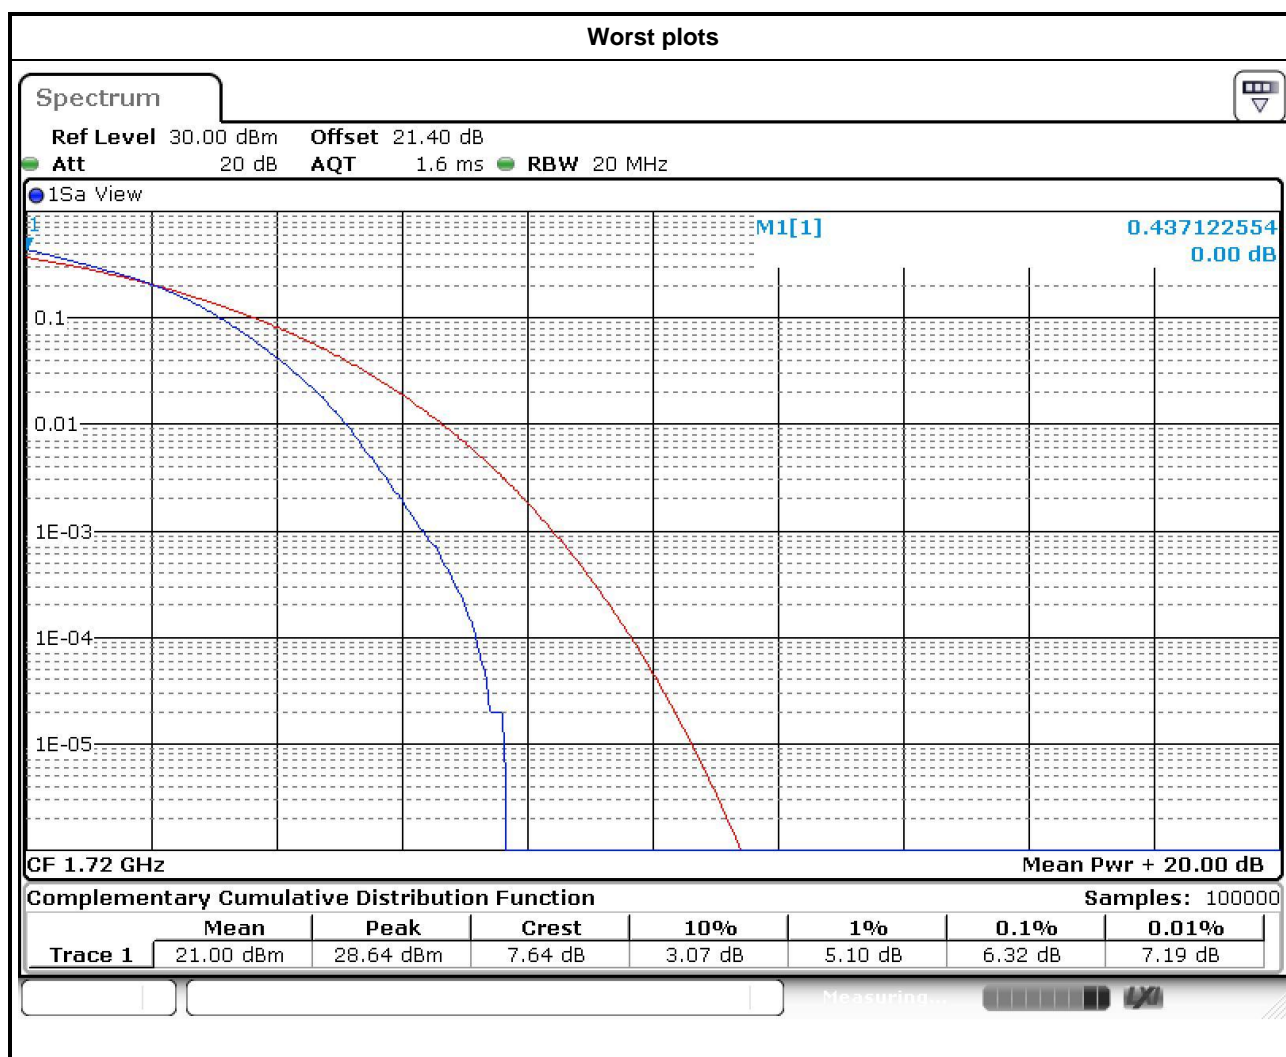

3.7 Frequency Stability


3.7.1 Limit of Frequency Stability

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

3.7.2 Test Procedures

1. EUT was placed at temperature chamber and connected to an external power supply.
2. Temperature and voltage condition shall be tested to confirm frequency stability.
3. Temperature range is from -30~55°C and voltage range is from lowest to highest working voltage.
4. Tem Link up EUT and simulator. Confirm frequency drift value of simulator and record it.

3.7.3 Test Setup

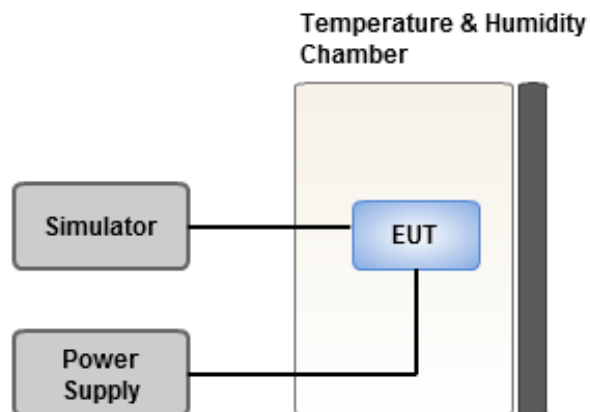

3.7.4 Test Result of Frequency Stability

LTE Band 4, CB: 1.4MHz			
Temperature (°C)	Voltage (dc)	Frequency Drift (ppm)	Limit (ppm)
55	3.7	0.014	2.5
50	3.7	0.012	2.5
40	3.7	0.013	2.5
30	3.7	0.013	2.5
20	3.7	0.014	2.5
10	3.7	0.013	2.5
0	3.7	0.012	2.5
-10	3.7	0.010	2.5
-20	3.7	0.012	2.5
-30	3.7	0.013	2.5
20	4.5	0.013	2.5
20	3.2	0.013	2.5

LTE Band 4, CB: 3MHz			
Temperature (°C)	Voltage (dc)	Frequency Drift (ppm)	Limit (ppm)
55	3.7	0.013	2.5
50	3.7	0.012	2.5
40	3.7	0.013	2.5
30	3.7	0.014	2.5
20	3.7	0.012	2.5
10	3.7	0.012	2.5
0	3.7	0.014	2.5
-10	3.7	0.013	2.5
-20	3.7	0.013	2.5
-30	3.7	0.012	2.5
20	4.5	0.014	2.5
20	3.2	0.013	2.5

LTE Band 4, CB: 5MHz			
Temperature (°C)	Voltage (dc)	Frequency Drift (ppm)	Limit (ppm)
55	3.7	0.013	2.5
50	3.7	0.012	2.5
40	3.7	0.013	2.5
30	3.7	0.014	2.5
20	3.7	0.014	2.5
10	3.7	0.013	2.5
0	3.7	0.013	2.5
-10	3.7	0.012	2.5
-20	3.7	0.012	2.5
-30	3.7	0.013	2.5
20	4.5	0.013	2.5
20	3.2	0.013	2.5

LTE Band 4, CB: 10MHz			
Temperature (°C)	Voltage (dc)	Frequency Drift (ppm)	Limit (ppm)
55	3.7	0.013	2.5
50	3.7	0.014	2.5
40	3.7	0.012	2.5
30	3.7	0.014	2.5
20	3.7	0.013	2.5
10	3.7	0.013	2.5
0	3.7	0.012	2.5
-10	3.7	0.013	2.5
-20	3.7	0.014	2.5
-30	3.7	0.013	2.5
20	4.5	0.013	2.5
20	3.2	0.012	2.5

LTE Band 4, CB: 15MHz			
Temperature (°C)	Voltage (dc)	Frequency Drift (ppm)	Limit (ppm)
55	3.7	0.014	2.5
50	3.7	0.013	2.5
40	3.7	0.013	2.5
30	3.7	0.013	2.5
20	3.7	0.013	2.5
10	3.7	0.012	2.5
0	3.7	0.012	2.5
-10	3.7	0.013	2.5
-20	3.7	0.013	2.5
-30	3.7	0.013	2.5
20	4.5	0.013	2.5
20	3.2	0.013	2.5

LTE Band 4, CB: 20MHz			
Temperature (°C)	Voltage (dc)	Frequency Drift (ppm)	Limit (ppm)
55	3.7	0.013	2.5
50	3.7	0.012	2.5
40	3.7	0.012	2.5
30	3.7	0.011	2.5
20	3.7	0.013	2.5
10	3.7	0.011	2.5
0	3.7	0.013	2.5
-10	3.7	0.012	2.5
-20	3.7	0.013	2.5
-30	3.7	0.013	2.5
20	4.5	0.012	2.5
20	3.2	0.013	2.5

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin
Kou District, New Taipei City,
Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,
Kwei Shan District, Tao Yuan City
333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan District, Tao Yuan
City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==