

**FCC PART 15 SUBPART B & SUBPART C SECTION 15.249
TEST REPORT***for***CO / O2 ANALYZER
Model: COOTWO**

Prepared for

DIVENAV, INC.
4311 JAMBOREE ROAD, SUITE #178
NEWPORT BEACH, CA 92660

Prepared by: _____

TOREY OLIVER

Approved by: _____

MATT HARRISON

COMPATIBLE ELECTRONICS INC.
20621 PASCAL WAY
LAKE FOREST, CALIFORNIA 92630
(949) 587-0400DATE: FEBRUARY 2nd, 2016

	REPORT BODY	APPENDICES					TOTAL
		A	B	C	D	E	
PAGES	18	2	2	2	14	23	61

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.

**Brea Division**
114 Olinda Drive
Brea, CA 92823
(714) 579-0500**Agoura Division**
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600**Silverado Division**
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700**Lake Forest Division**
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

TABLE OF CONTENTS

Section / Title	PAGE
GENERAL REPORT SUMMARY	4
SUMMARY OF TEST RESULTS	5
1. PURPOSE	6
2. ADMINISTRATIVE DATA	7
2.1 Location of Testing	7
2.2 Traceability Statement	7
2.3 Cognizant Personnel	7
2.4 Date Test Sample was Received	7
2.5 Disposition of the Test Sample	7
2.6 Abbreviations and Acronyms	7
3. APPLICABLE DOCUMENTS	8
4. DESCRIPTION OF TEST CONFIGURATION	9
4.1 Description of Test Configuration	9
4.1.1 Photograph Test Configuration	9
4.1.2 Cable Construction and Termination	10
5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT	11
5.1 EUT and Accessory List	11
5.2 EMI Test Equipment	12
6. TEST SITE DESCRIPTION	13
6.1 Test Facility Description	13
6.2 EUT Mounting, Bonding and Grounding	13
6.3 Facility Environmental Characteristics	13
7. CHARACTERISTICS OF THE TRANSMITTER	14
7.1 Channel Number and Frequencies	14
7.2 Antenna	14
8. TEST PROCEDURES	15
8.1 RF Emissions	15
8.1.1 Conducted Emissions Test	15
8.1.2 Radiated Emissions (Spurious and Harmonics) Test	16
8.1.3 Fundamental Field Strength	17
8.1.4 Duty Cycle	17
8.1.5 Emissions Radiated Outside of the Fundamental Frequency Band	17
9. TEST PROCEDURE DEVIATIONS	18
10. CONCLUSIONS	18



LIST OF APPENDICES

APPENDIX	TITLE
A	Laboratory Accreditations and Recognitions
B	Modifications to the EUT
C	Additional Models Covered Under This Report
D	Diagrams, Charts, and Photos • Test Setup Diagrams • Antenna and Amplifier Factors • Radiated and Conducted Emissions Photos
E	Radiated and Conducted Emissions Data Sheets

LIST OF FIGURES

FIGURE	TITLE
1	Plot Map And Layout of Test Site Below 1GHz
2	Plot Map And Layout of Test Site Above 1GHz
3	Conducted Emissions Test Setup



GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced in any form unless done so in full with the written permission of Compatible Electronics.

This report must not be used to claim product certification, approval or endorsement by NVLAP, NIST, or any agency of the federal government.

Device Tested: CO / O2 Analyzer
Model: COOTWO
S/N: None

Product Description: COOTWO is a dual-gas Oxygen and Carbon Monoxide analyzer for recreational SCUBA divers. COOTWO includes a chemical sensor that measures the partial pressure of Oxygen and a chemical sensor that measures the amount of Carbon Monoxide in a gas. COOTWO can operate stand-alone or in conjunction with a smartphone via Bluetooth 4.0 low energy technology.

Modifications: The EUT was not modified in order to comply with specifications.

Manufacturer: DiveNav, Inc.
4311 Jamboree Road, Suite #178
Newport Beach, CA 92660

Test Date: January 15, February 2, 2016

Test Specifications: EMI requirements

CFR Title 47, Part 15 Subpart B Sections 15.107, 15.109, Subpart C Sections 15.205, 15.207, 15.209 and 15.249

Test Procedure: ANSI C63.4 & C63.10



SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Conducted RF Emissions, 150 kHz - 30 MHz.	Complies with the limits of CFR Title 47 Part 15 Subpart B, Section 15.107 and Subpart C Section 15.207
2	Radiated RF Emissions & Harmonics, 9 kHz – 10,000 MHz.	Complies with the limits of CFR Title 47 Part 15 Subpart B Section 15.109 & Subpart C Sections 15.205, 15.209, & 15.249
3	Fundamental Field Strength	Complies with the limits of CFR Title 47 Part 15 Subpart C Section 15.249
4	Emissions Radiated Outside of the Fundamental Frequency Band	Complies with the limits of CFR Title 47 Part 15 Subpart C Sections 15.205 & 15.249

TABLE 1:

SIX HIGHEST CONDUCTED EMISSIONS READINGS

	Reading Type (PK / QP / AV)	Line (Line / Neutral)	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Delta (dB)
1	AV	L	0.52	29.64	46.00	-16.36
2	AV	L	6.53	27.97	50.00	-22.03
3	AV	N	0.59	22.02	46.00	-23.98
4	AV	L	0.49	21.67	46.24	-24.57
5	AV	N	0.51	17.59	46.00	-28.41
6	AV	N	6.59	20.14	50.00	-29.86

TABLE 2

SIX HIGHEST RADIATED EMISSIONS READINGS

	Reading Type (PK / QP / AV)	Polarization (Vert / Horz)	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Delta (dB)	Test Distance
1	QP	V	48.00	23.63	40.00	-16.37	3-Meter
2	QP	H	938.40	27.95	46.00	-18.05	3-Meter
3	QP	H	739.60	26.72	46.00	-19.28	3-Meter
4	QP	H	48.00	20.60	40.00	-19.40	3-Meter
5	QP	V	738.40	26.60	46.00	-19.40	3-Meter
6	QP	V	736.90	26.48	46.00	-19.52	3-Meter



1. PURPOSE

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the CO / O2 Analyzer Model: COOTWO. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4 & C63.10. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT (equipment under test) hereafter, are within the specification limits defined by the Code of Federal Regulations Title 47, Part 15 Subpart B sections 15.107, 15.109, & Part 15 Subpart C sections 15.205, 15.207, 15.209 and 15.249.



2. ADMINISTRATIVE DATA

2.1 Location of Testing

The tests described herein were performed at the test facility of Compatible Electronics, 20621 Pascal Way Lake Forest, California 92630.

2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

2.3 Cognizant Personnel

DiveNav, Inc.

Alberto Montovani President & CEO

Compatible Electronics, Inc.

Torey Oliver Test Technician
Matt Harrison Lab Manager

2.4 Date Test Sample was Received

The test sample was received on January 15, 2016.

2.5 Disposition of the Test Sample

The test sample remains at Compatible Electronics, Inc. as of the date of this test report.

2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

RF	Radio Frequency
EMI	Electromagnetic Interference
EUT	Equipment Under Test
P/N	Part Number
S/N	Serial Number
HP	Hewlett Packard
ITE	Information Technology Equipment
CML	Corrected Meter Limit
LISN	Line Impedance Stabilization Network
NVLAP	National Voluntary Laboratory Accreditation Program
CFR	Code of Federal Regulations
PCB	Printed Circuit Board
TX	Transmit
RX	Receive



3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this Test Report.

SPEC	TITLE
CFR Title 47, Part 15	FCC Rules – Radio frequency devices (including digital devices)
ANSI C63.4 2014	Methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz.
ANSI C63.10: 2013	American National Standard for Testing Unlicensed Wireless Devices



4. DESCRIPTION OF TEST CONFIGURATION

4.1 Description of Test Configuration

The CO / O2 Analyzer Model: COOTWO (EUT) was setup in a tabletop configuration. The EUT was checked in all 3 axis. The worst case was found to be the X-Axis. The EUT was continuously transmitting a data stream during transmit tests. The EUT was checked for worst case in all orientations such as charging the EUT and not charging, and the worst case was not charging.

The tests were performed using a new battery.

It was determined that the emissions were at their highest level when the EUT was transmitting in the configuration described above for Radiated Emissions. The final radiated data was taken in the above configuration. Please see Appendix E for the test data.

4.1.1 Photograph Test Configuration



4.1.2 Cable Construction and Termination

Cable 1

This is a 1-meter, braid shielded USB cable. This cable connects the EUT to a 5VDC power adapter. It has a USB Type A connector at the power supply end and a micro USB connector at the EUT end of the cable. The cable was not bundled.



5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT**5.1 EUT and Accessory List**

#	EQUIPMENT TYPE	MANU-FACTURER	MODEL	SERIAL NUMBER
1	CO / O2 ANALYZER (EUT)	DIVENAV, INC.	COOTWO	NONE
2	SMART PHONE	APPLE	IPHONE	NONE
3	USB POWER ADAPTER	BELKIN	F8Z981	NONE



5.2 EMI Test Equipment

EQUIPMENT TYPE	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. DUE DATE
Computer	Compatible Electronics	NONE	NONE	N/A	N/A
EMI Receiver	Rohde & Schwarz	ESIB40	100172	09/22/2015	09/22/2016
Antenna, Loop	Com Power	AL-130	121049	12/06/2013	12/06/2016
Antenna, CombiLog	Com Power	AC-220	003	05/20/2014	05/20/2016
Antenna, Horn 1-18GHz	Com Power	AH-118	071225	07/01/2014	07/01/2016
Antenna, Horn 18-26GHz	Com-Power	AH-826	081033	07/06/2014	07/06/2016
Pre-Amp, 1-18GHz	Com Power	PAM-118A	551033	02/05/2015	02/05/2016
Pre-Amp, 18-40GHz	Com-Power	PA-840	181289	06/16/2015	06/16/2016
High Pass Filter	AMTI Microwave Circuits	H3G020G4	481230	08/26/2015	08/26/2016
Mast, Antenna Positioner	Sunol Science Corporation	TWR 95-4	020808-3	N/A	N/A
Antenna Mast	Sunol Science Corporation	TWR 95-4	020808-3	N/A	N/A
Turntable	Sunol Science Corporation	FM 2001	N/A	N/A	N/A
Mast and Turntable Controller	Sunol Science Corporation	SC104V	020808-1	N/A	N/A
LISN	Com-Power	LI-150	191935	03/17/2014	03/17/2016



6. TEST SITE DESCRIPTION

6.1 Test Facility Description

Please refer to section 2.1 and the figures in Appendix D of this report for test location.

6.2 EUT Mounting, Bonding and Grounding

The EUT was mounted on a 1.0 by 1.5 by 0.8 meter high non-conductive table, which was placed on the ground plane.

For above 1GHz testing the EUT was place 1.5 meters above high, above the ground plane.

The EUT was not grounded.

6.3 Facility Environmental Characteristics

When applicable refer to the data sheets in Appendix E for the relative humidity, air temperature, and barometric pressure.



7. CHARACTERISTICS OF THE TRANSMITTER

7.1 Channel Number and Frequencies

There are a total of 40 channels. The low channel is at 2402.0 MHz and the high channel is at 2480.0 MHz. There is approximately 2 MHz separation between channels and the EUT uses GFSK modulation.

7.2 Antenna

The antenna is a PCB trace located on the EUT PCB.



8. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

8.1 RF Emissions

8.1.1 Conducted Emissions Test

The EMI receiver was used as a measuring meter. A quasi-peak and/or average reading was taken only where indicated in the data sheets. The LISN output was measured using the EMI receiver. The output of the second LISN was terminated by a 50-ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding, and grounding of the EUT. The EUT received its power through the LISN, which was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI 63.4. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The different configurations were investigated to find the worst case as well the worst case channel. The final data was collected under program control by the computer software. The final qualification data is located in Appendix E.

Test Results:

The EUT complies with the limits of CFR Title 47 Part 15 Subpart B section 15.107, & Subpart C section 15.207. The six highest emissions are listed in table 1.



8.1.2 Radiated Emissions (Spurious and Harmonics) Test

The EMI receiver was used as a measuring meter. The receiver was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the receiver records the highest measured reading over all the sweeps. Amplifiers were used to increase the sensitivity of the instrument. There was one Microwave Preamplifier used for frequencies above 1 GHz.

For spurious emissions the quasi-peak detector was used for frequencies below 1GHz and the average detector was used for frequencies above 1 GHz.

For the harmonics and fundamental emissions a duty cycle average was used.

The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE (MHz)	TRANSDUCER	EFFECTIVE MEASUREMENT BANDWIDTH
.009 to .150	Active Loop Antenna	200 Hz
.150 to 30	Active Loop Antenna	9 kHz
30 to 1000	Combilog Antenna	100 kHz
1000 to 25000	Horn Antenna	1 MHz

The TDK FAC-3 shielded test chamber of Compatible Electronics, Inc. was used for radiated emissions testing. This test site is in full compliance with ANSI C63.4 & ANSI C63.10. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters in both vertical and horizontal polarizations (for E field radiated field strength).

Test Results:

The EUT complies with the limits of CFR Title 47 Part 15 Subpart B section 15.109, & Part 15 Subpart C sections 15.205, 15.209 and 15.249. The six highest emissions are listed in table 2.



8.1.3 Fundamental Field Strength

The Peak Transmit Radiated Field Strength was measured at a 3-meter test distance. The EMI Receiver was used to obtain the final test data. The final qualification data sheets are located in Appendix E.

8.1.4 Duty Cycle

Where

$$\delta(\text{dB}) = 20 \log \left[\frac{\sum (nt_1 + mt_2 + \dots + \xi t_x)}{T} \right]$$

n is the number of pulses of duration t_1

m is the number of pulses of duration t_2

ξ is the number of pulses of duration t_x

T is the period of the pulse train or 100 ms if the pulse train length is greater than 100 ms

Duty Cycle Correction Factor = -20.00dB

Pulse Type 1 = $4 * 384.7695 \text{ uS} = 1.539078156 \text{ mS}$

Total On Time = 1.539078156 mS

$100 \text{ ms} / 1.539078156 = 0.0154$

$20 \log (0.0154) = -36.25 \text{ dB}$ correction factor

Max Duty Cycle Correction Factor = -20.00dB

Test Results:

The EUT complies with Part 15 Subpart C, Section 15.249.

8.1.5 Emissions Radiated Outside of the Fundamental Frequency Band

The Band Edge measurement was measured using the EMI Receiver at a 3-meter test distance to obtain the final test data. The lower and upper channels were tuned during the low and high band edge tests. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with Part 15 Subpart C, Section 15.205 & 15.249.



9. TEST PROCEDURE DEVIATIONS

The test procedures were not deviated from throughout all tests.

10. CONCLUSIONS

The CO / O2 Analyzer Model: COOTWO meets all of the relevant specification requirements defined in the Code of Federal Regulations Title 47, Part 15 Subpart B section 15.107, 15.109, & Subpart C sections 15.205, 15.207, 15.209 and 15.249.



APPENDIX A***LABORATORY ACCREDITATIONS AND
RECOGNITIONS***

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

LABORATORY ACCREDITATIONS AND RECOGNITIONS

NVLAP LAB CODES 200063-0,
200528-0, 200527-0

For US, Canada, Australia/New Zealand, Taiwan and the European Union, Compatible Electronics is currently accredited by NVLAP to ISO/IEC 17025 an ISO 9002 equivalent. Please follow the link to the NIST site for each of our facilities NVLAP certificate and scope of accreditation.

NVLAP listing links

Agoura Division - <http://ts.nist.gov/Standards/scopes/2000630.htm>Brea Division - <http://ts.nist.gov/Standards/scopes/2005280.htm>Silverado/Lake Forest Division - <http://ts.nist.gov/Standards/scopes/2005270.htm>

ANSI listing

[CETCB](http://www.ansica.org/wwwversion2/outside/ALLdirectoryDetails.asp?menuID=1&prgID=3&orgID=123&status=4)<https://www.ansica.org/wwwversion2/outside/ALLdirectoryDetails.asp?menuID=1&prgID=3&orgID=123&status=4>

Compatible Electronics has been nominated as a Conformity Assessment Body (CAB) for EMC under the US/EU Mutual Recognition Agreement (MRA).



Compatible Electronics has been nominated as a Conformity Assessment Body (CAB) for Taiwan/BSMI under the US/APEC (Asia-Pacific Economic Cooperation) Mutual Recognition Agreement (MRA).

We are also certified/listed for IT products by the following country/agency:



VCCI Listing, from VCCI site

[Enter "Compatible" in search form](http://www.vcci.or.jp/vcci_e/activity/registration/setsubi.html) http://www.vcci.or.jp/vcci_e/activity/registration/setsubi.html

FCC Listing, from FCC OET site

[FCC test lab search](https://fjallfoss.fcc.gov/oetcf/eas/reports/TestFirmSearch.cfm) <https://fjallfoss.fcc.gov/oetcf/eas/reports/TestFirmSearch.cfm>

Compatible Electronics IC listing can be found at:

<http://www.ic.gc.ca/eic/site/ic1.nsf/eng/home>

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

APPENDIX B

MODIFICATIONS TO THE EUT



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

MODIFICATIONS TO THE EUT

There were no modifications were made during testing.



APPENDIX C***ADDITIONAL MODELS COVERED
UNDER THIS REPORT***

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

ADDITIONAL MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

CO / O2 ANALYZER
Model: COOTWO
S/N: NONE

No additional models were tested.



APPENDIX D

DIAGRAMS, CHARTS, AND PHOTOS



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

FIGURE 1: PLOT MAP AND LAYOUT OF TEST SITE BELOW 1GHZ

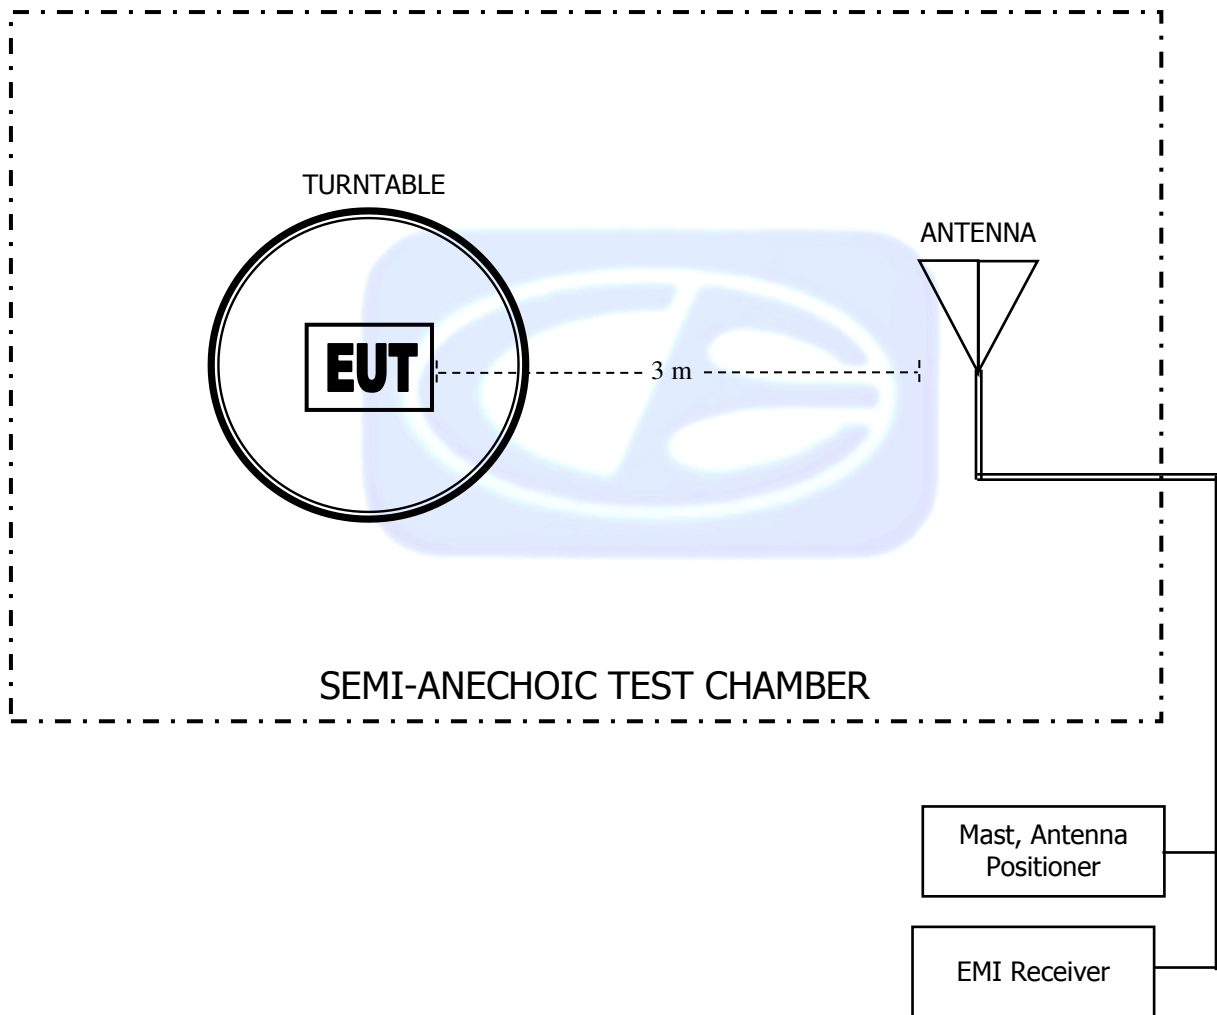


FIGURE 2: PLOT MAP AND LAYOUT OF TEST SITE ABOVE 1GHZ


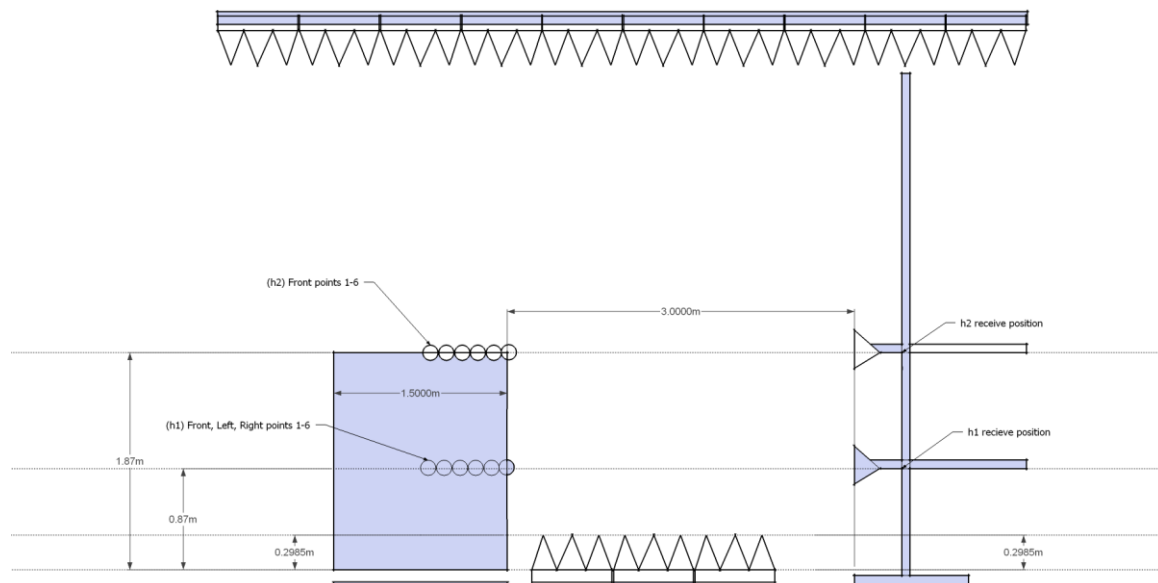


FIGURE 3: CONDUCTED EMISSIONS TEST SETUP

COM-POWER AL-130**LOOP ANTENNA****S/N: 121049****CALIBRATION DUE: DECEMBER 6, 2016**

FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)	FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)
0.009	-34.64	16.86	0.8	-36.32	15.18
0.01	-34.78	16.72	0.9	-36.22	15.28
0.02	-35.91	15.59	1.0	-36.22	15.28
0.03	-35.48	16.02	2.0	-35.91	15.59
0.04	-35.82	15.68	3.0	-35.91	15.59
0.05	-36.49	15.01	4.0	-36.01	15.49
0.06	-36.30	15.20	5.0	-35.80	15.70
0.07	-36.43	15.07	6.0	-36.00	15.50
0.08	-36.30	15.20	7.0	-35.90	15.60
0.09	-36.39	15.11	8.0	-35.70	15.80
0.1	-36.41	15.09	9.0	-35.70	15.80
0.2	-36.61	14.89	10.0	-35.60	15.90
0.3	-36.63	14.87	15.0	-36.52	14.98
0.4	-36.52	14.99	20.0	-35.75	15.75
0.5	-36.63	14.87	25.0	-37.78	13.72
0.6	-36.62	14.88	30.0	-38.62	12.88
0.7	-36.53	14.97			

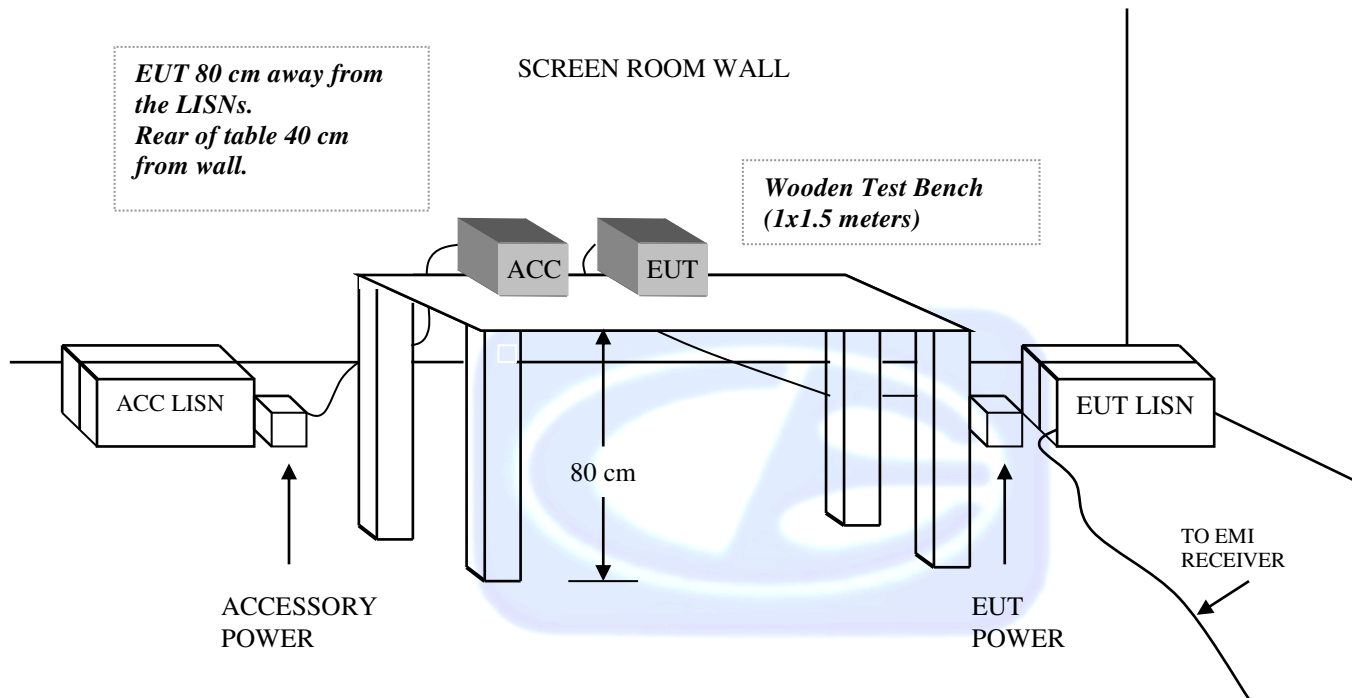

COM-POWER AC-220**LAB P - COMBILOG ANTENNA**

S/N: 003

CALIBRATION DUE: MAY 21, 2016

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	22.90	160	15.20
35	22.80	180	14.40
40	23.50	200	14.10
45	21.90	250	15.90
50	22.00	300	18.20
60	18.10	400	19.40
70	12.80	500	21.50
80	12.10	600	22.00
90	12.70	700	23.90
100	13.00	800	25.80
120	15.50	900	27.00
140	14.40	1000	27.90



COM-POWER AH-118**HORN ANTENNA****S/N: 071225****CALIBRATION DUE: JULY 1, 2016**

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
1000	30.2	9500	43.86
1500	29.46	10000	43.85
2000	31.81	10500	43.54
2500	35.95	11000	45.28
3000	33.6	11500	45.18
3500	36.43	12000	45.03
4000	35.85	12500	44.33
4500	36.32	13000	45.71
5000	40.11	13500	46.89
5500	38.7	14000	46.88
6000	39.33	14500	45.89
6500	40.08	15000	49.59
7000	41.17	15500	46.49
7500	43.58	16000	45.01
8000	41.55	16500	44.57
8500	42.63	17000	48.28
9000	43.5	17500	49.88
		18000	49.94



COM-POWER PAM-118A**1-18GHz - PREAMPLIFIER****S/N: 551033****CALIBRATION DUE: FEBRUARY 5, 2016**

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
500	36.57	5500	40.23
1000	38.49	6000	38.68
1100	38.83	6500	39.16
1200	39.05	7000	35.30
1300	39.06	7500	36.25
1400	38.83	8000	36.08
1500	38.52	8500	36.03
1600	38.69	9000	36.9
1700	39.54	9500	37.29
1800	39.66	10000	37.56
1900	40.49	11000	37.23
2000	40.03	12000	37.05
2500	39.30	13000	36.15
3000	41.29	14000	33.80
3500	40.61	15000	37.41
4000	41.49	16000	37.98
4500	41.51	17000	35.82
5000	40.41	18000	32.01



**FRONT VIEW**

DIVENAV, INC.
CO / O2 ANALYZER
Model: COOTWO

FCC SUBPART B & C - RADIATED EMISSIONS < 1GHz


**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

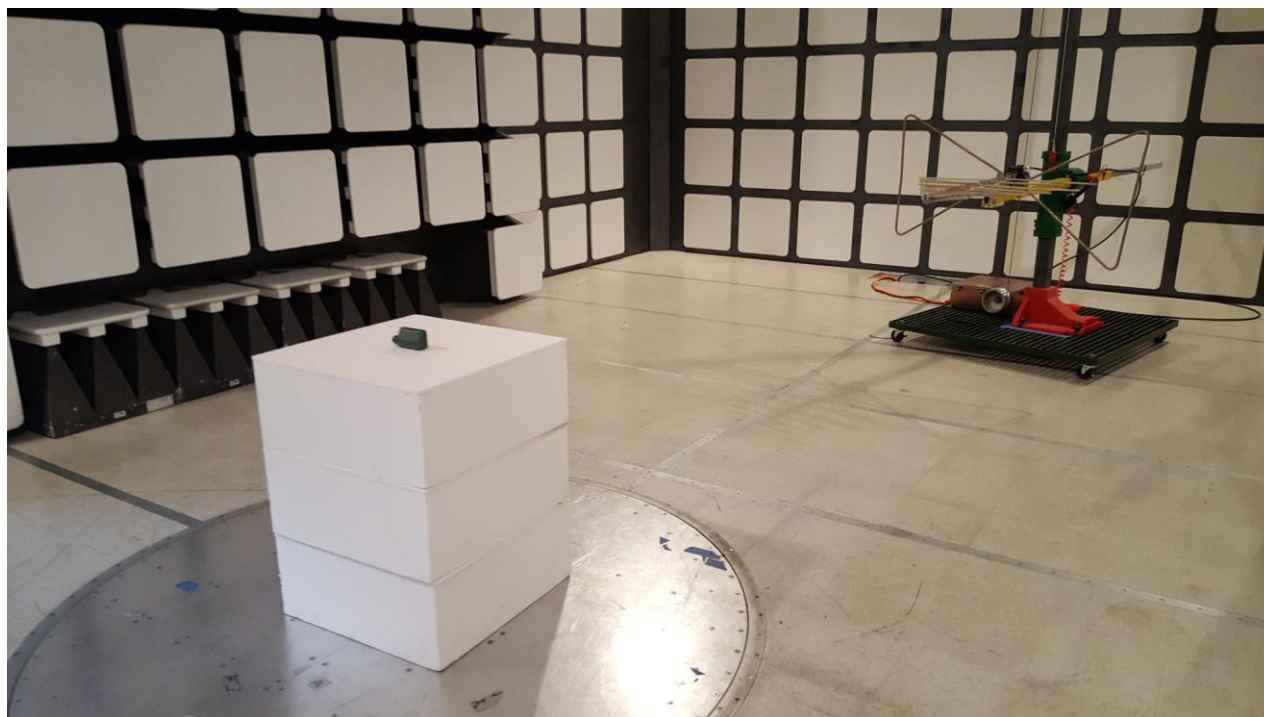

REAR VIEW

DIVENAV, INC.
CO / O2 ANALYZER
Model: COOTWO

FCC SUBPART B & C - RADIATED EMISSIONS < 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



FRONT VIEW

DIVENAV, INC.
CO / O2 ANALYZER
Model: COOTWO

FCC SUBPART B & C - RADIATED EMISSIONS > 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

**REAR VIEW**

DIVENAV, INC.
CO / O2 ANALYZER
Model: COOTWO

FCC SUBPART B & C - RADIATED EMISSIONS > 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



FRONT VIEW

DIVENAV, INC.
CO / O2 ANALYZER
Model: COOTWO

FCC SUBPART B & C - CONDUCTED EMISSIONS

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



REAR VIEW

DIVENAV, INC.
CO / O2 ANALYZER
Model: COOTWO

FCC SUBPART B & C - CONDUCTED EMISSIONS

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

APPENDIX E***RADIATED EMISSIONS DATA SHEETS***

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500


Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Title: FCC 15.209 & 15.109 Class B
File: Radiated Pre-Scan 30-1000Mhz
Operator: Matt Harrison
EUT Type: COOTWO.
EUT Condition: Constantly Hopping.
Comments: X-Axis
Temp: 70f
Hum: 42%
Battery Operated

1/15/2016 3:15:12 PM
Sequence: Preliminary Scan

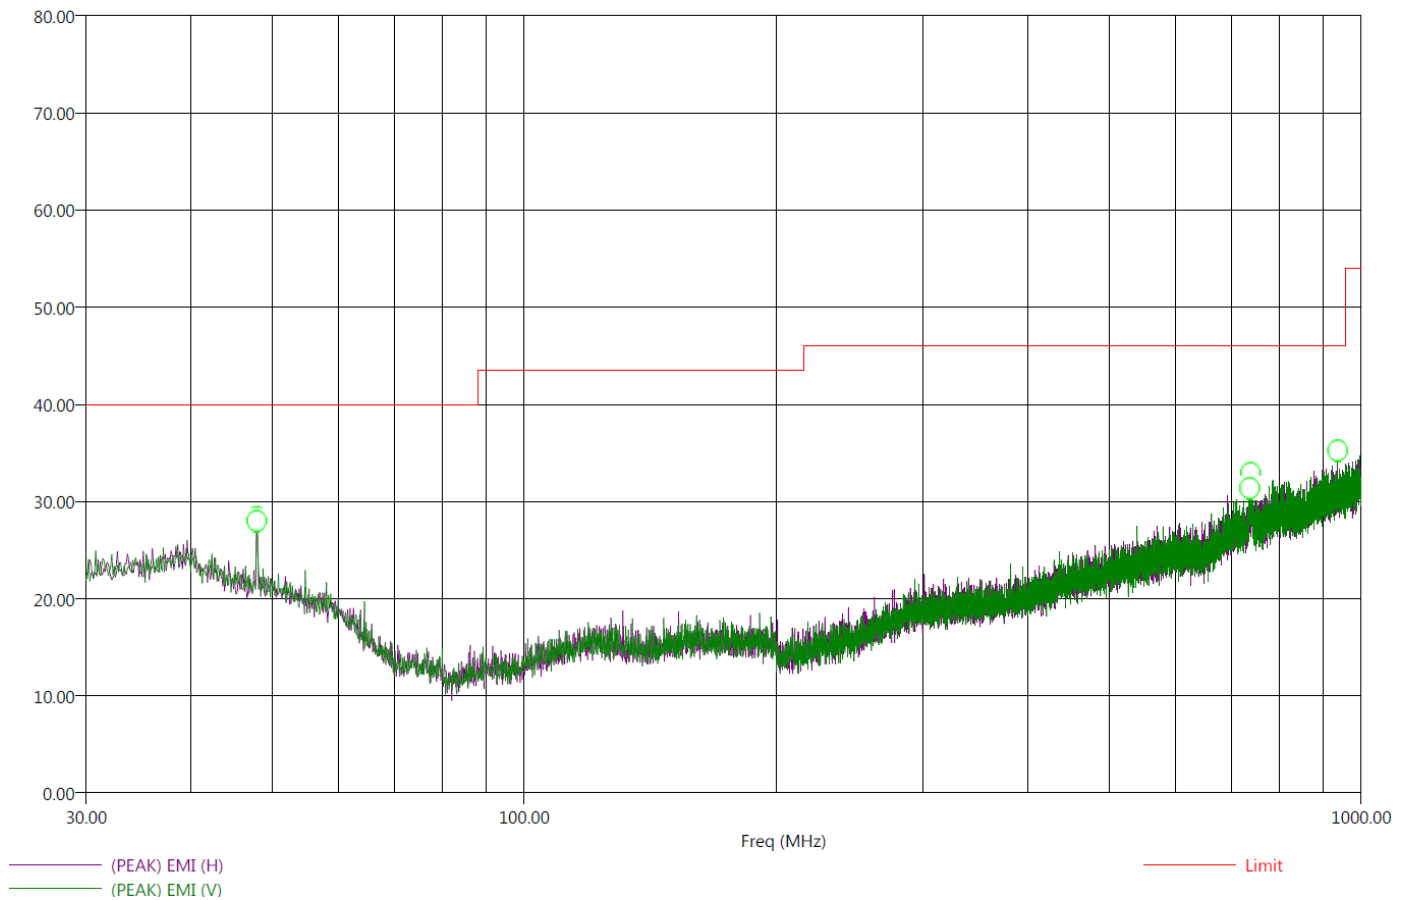Compatible Electronics, Inc. FAC-3 (Lab P)Electric Field Strength (dB μ V/m)

***There were no radiated emissions other than harmonics found below 30 MHz or above 1GHz.
This is the worst case mode.***



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Title: FCC 15.209 & 15.109 Class B
File: Radiated Final 30-1000Mhz
Operator: Matt Harrison
EUT Type: COOTWO.
EUT Condition: Constantly Hopping.
Comments: X-Axis
Temp: 70f
Hum: 42%
Battery Operated

1/15/2016 3:26:50 PM
Sequence: Final Measurements

Compatible Electronics, Inc. FAC-3 (Lab P)

Freq (MHz)	(QP) Margin (dB)	(QP) EMI (dBμV/m)	(PEAK) EMI (dBμV/m)	Limit (dBμV/m)	Pol	Ttbl Agl (deg)	Twr Ht (cm)	Transducer(dB)	Cable(dB)
48.00	-19.40	20.60	25.71	40.00	H	2.25	217.64	21.38	0.33
48.00	-16.37	23.63	26.99	40.00	V	23.50	399.70	21.38	0.32
736.90	-19.52	26.48	32.48	46.00	V	215.50	214.05	24.59	3.15
738.40	-19.40	26.60	32.03	46.00	V	360.00	268.17	24.63	3.14
739.60	-19.28	26.72	32.13	46.00	H	84.50	400.05	24.66	3.12
938.40	-18.05	27.95	34.13	46.00	H	102.50	337.17	26.83	3.45

*There were no radiated emissions other than harmonics found below 30 MHz or above 1GHz.
This is the worst case mode.*



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

CONDUCTED EMISSIONS
DATA SHEETS



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500


Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Title: FCC 15.207 & 15.107 Class B
File: Conducted Pre-Line.set
Operator: Matt Harrison
EUT Type: COOTWO.
EUT Condition: Charging/Hopping.
Comments: Connected to representative USB adapter.
Temp: 66f
Hum: 44%
Host: 120V 60Hz

2/2/2016 9:41:42 AM
Sequence: Preliminary Scan

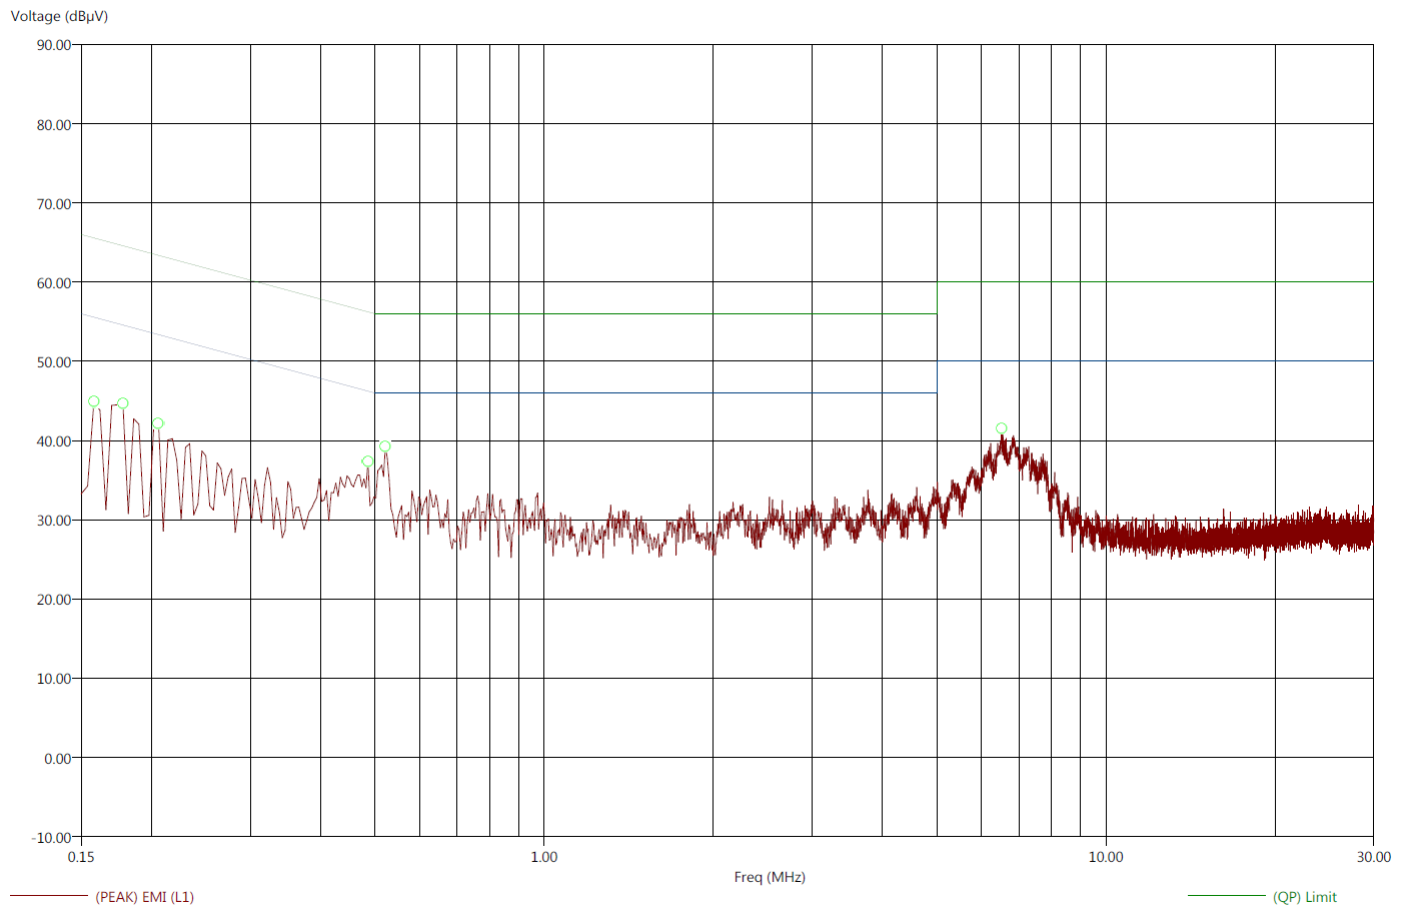Compatible Electronics, Inc. FAC-3 (LAB P)

This is the worst case mode.



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Title: FCC 15.207 & 15.107 Class B
File: Conducted Final-Line.set
Operator: Matt Harrison
EUT Type: COOTWO.
EUT Condition: Charging/Hopping.
Comments: Connected to representative USB adapter.
Temp: 66f
Hum: 44%
Host: 120V 60Hz

2/2/2016 9:51:11 AM
Sequence: Final Measurements

Compatible Electronics, Inc. FAC-3 (LAB P)

Freq (MHz)	(AVG) Margin AVL (dB)	(QP) Margin QPL (dB)	(AVG) EMI (dBμV)	(QP) EMI (dBμV)	(PEAK) EMI (dBμV)	(AVG) Limit (dBμV)	(QP) Limit (dBμV)	Transducer (dB)	Cable (dB)
0.16	-30.54	-25.72	25.03	39.84	46.56	55.57	65.57	0.43	0.20
0.18	-31.50	-26.45	23.08	38.13	43.70	54.58	64.58	0.37	0.25
0.21	-34.51	-27.76	18.86	35.61	40.29	53.37	63.37	0.30	0.29
0.49	-24.57	-28.14	21.67	28.09	34.17	46.24	56.24	0.03	0.01
0.52	-16.36	-20.17	29.64	35.83	39.03	46.00	56.00	0.02	0.00
6.53	-22.03	-24.32	27.97	35.68	39.40	50.00	60.00	0.03	0.39

This is the worst case mode.



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500


Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Title: FCC 15.207 & 15.107 Class B
File: Conducted Pre-Neutral.set
Operator: Matt Harrison
EUT Type: COOTWO.
EUT Condition: Charging/Hopping.
Comments: Connected to representative USB adapter.
Temp: 66f
Hum: 44%
Host: 120V 60Hz

2/2/2016 9:54:21 AM
Sequence: Preliminary Scan

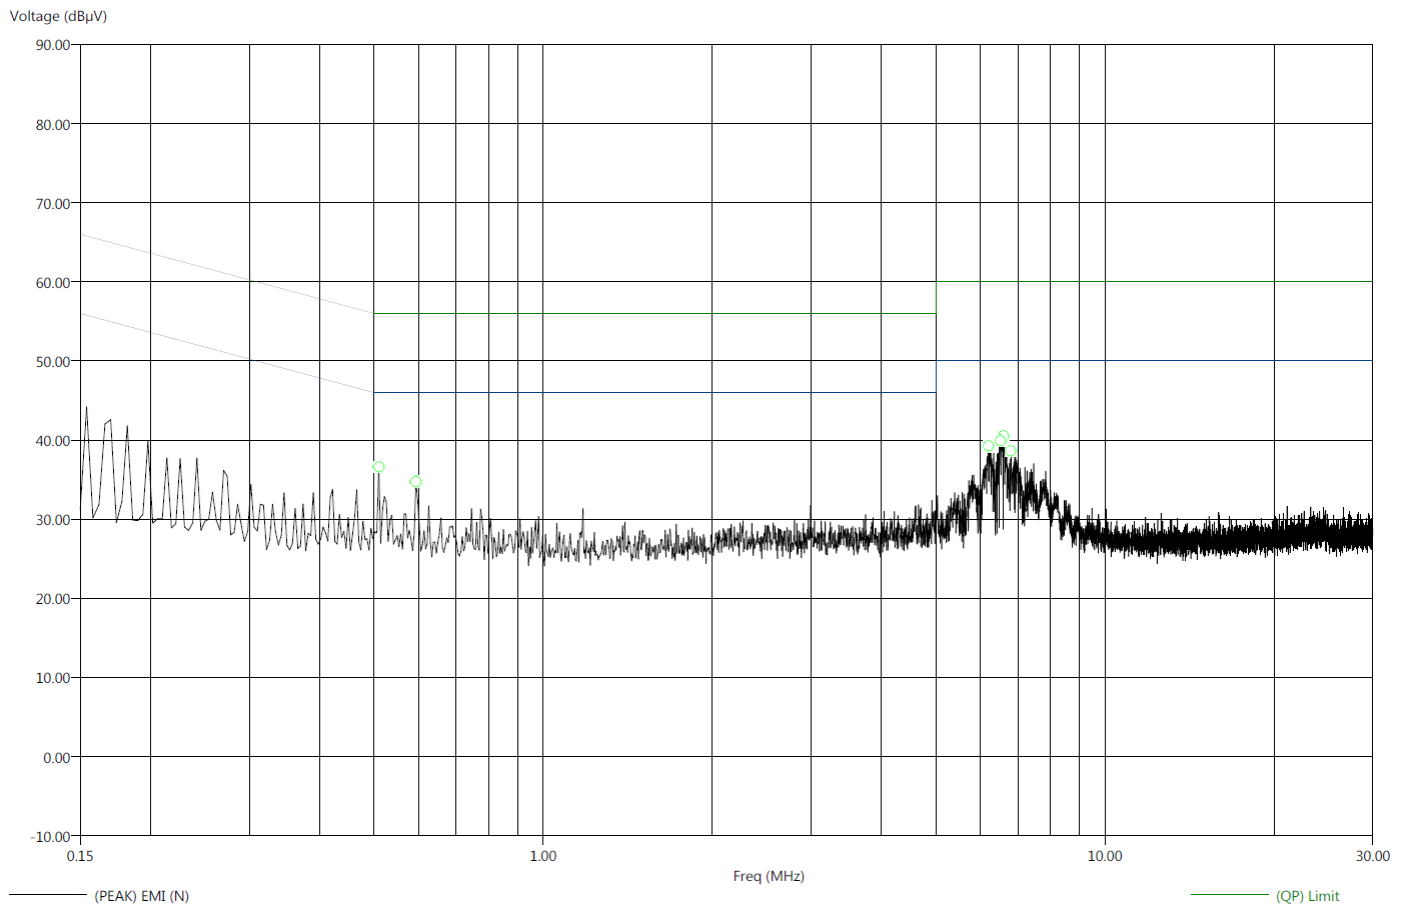Compatible Electronics, Inc. FAC-3 (LAB P)

This is the worst case channel and mode.



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Title: FCC 15.207 & 15.107 Class B
File: Conducted Final-Neutral.set
Operator: Matt Harrison
EUT Type: COOTWO.
EUT Condition: Charging/Hopping.
Comments: Connected to representative USB adapter.
Temp: 66f
Hum: 44%
Host: 120V 60Hz

2/2/2016 9:57:47 AM
Sequence: Final Measurements

Compatible Electronics, Inc. FAC-3 (LAB P)

Freq (MHz)	(AVG) Margin AVL (dB)	(QP) Margin QPL (dB)	(AVG) EMI (dBμV)	(QP) EMI (dBμV)	(PEAK) EMI (dBμV)	(AVG) Limit (dBμV)	(QP) Limit (dBμV)	Transducer (dB)	Cable (dB)
0.51	-28.41	-27.29	17.59	28.71	36.81	46.00	56.00	0.03	0.00
0.59	-23.98	-26.38	22.02	29.62	34.79	46.00	56.00	0.03	0.00
6.21	-31.81	-26.95	18.19	33.05	37.61	50.00	60.00	0.03	0.36
6.53	-30.96	-25.96	19.04	34.04	38.80	50.00	60.00	0.03	0.39
6.59	-29.86	-25.51	20.14	34.49	39.02	50.00	60.00	0.03	0.40
6.81	-34.59	-31.14	15.41	28.86	37.41	50.00	60.00	0.03	0.42

This is the worst case channel and mode.




Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

***DUTY CYCLE
DATA SHEETS***

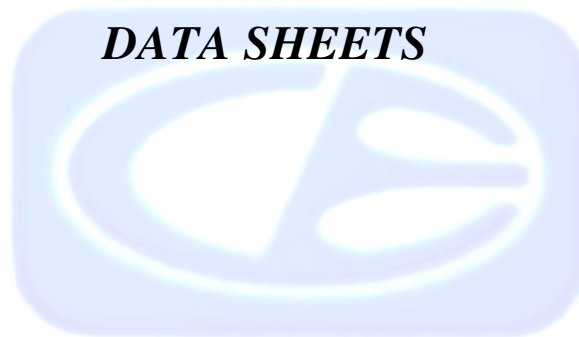


Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600


Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

DUTY CYCLE



DUTY CYCLE

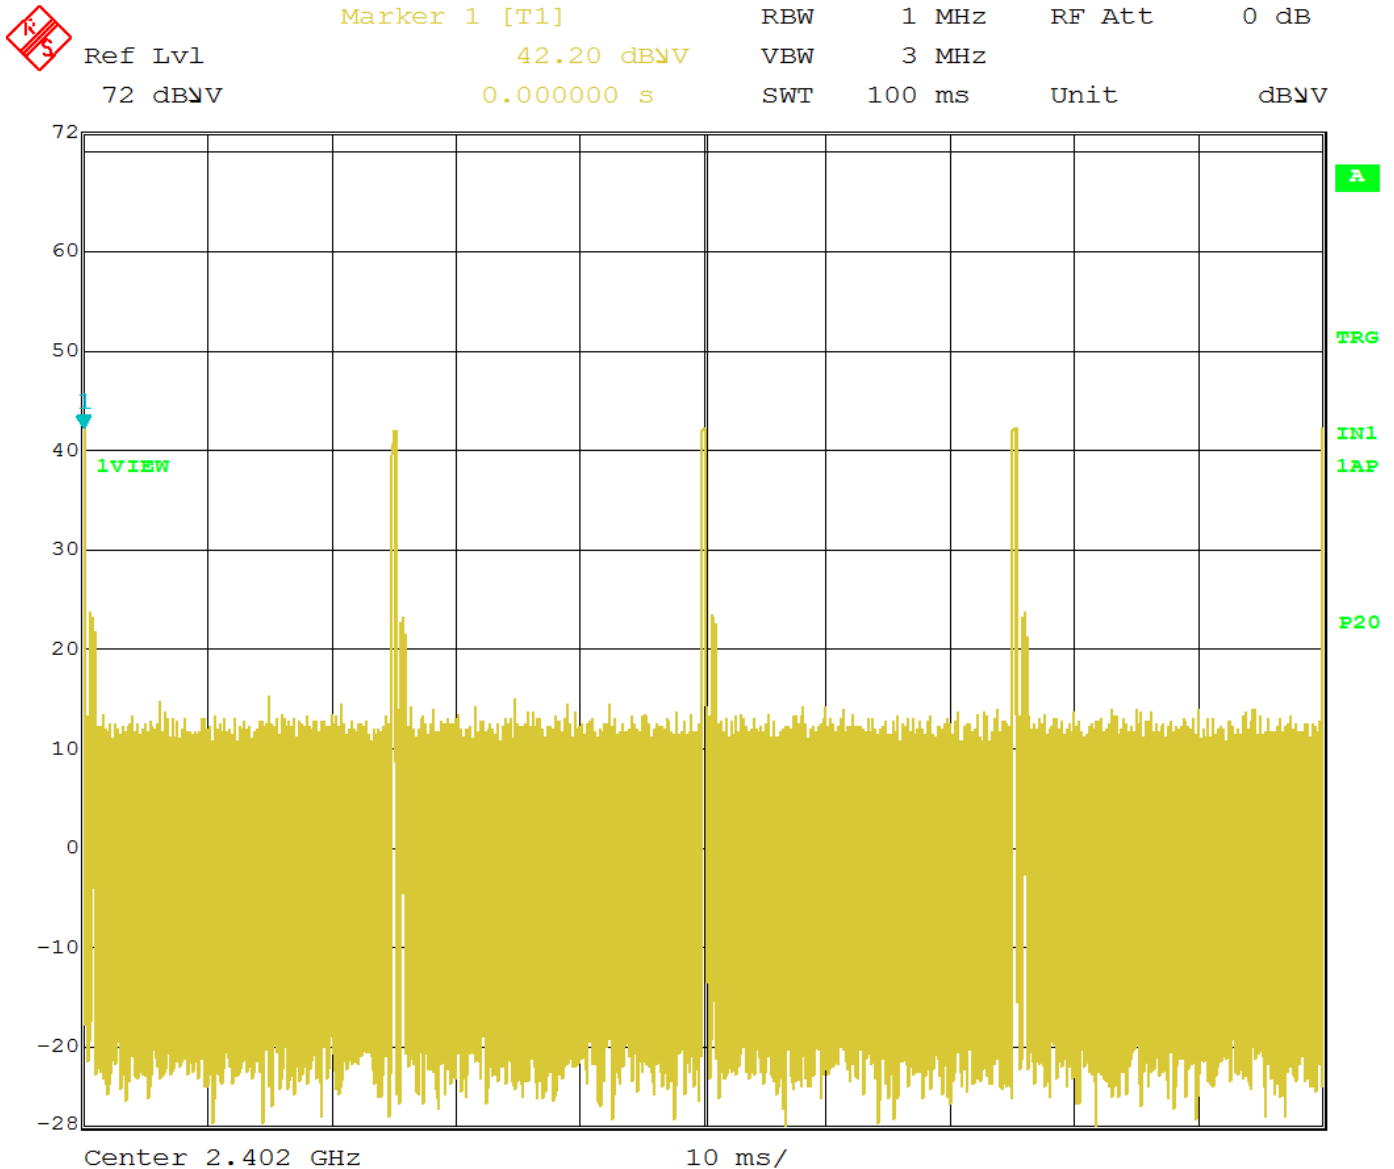

Title: COOTWO
 Comment A: DUTY CYCLE

Duty cycle was checked in each mode, advertise and burst data transfer. Worst case duty cycle is when the product is in burst data transfer mode. Every 100ms, 4 bursts at 384.7695 us each.



Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500


Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

FUNDAMENTAL & HARMONICS

DATA SHEETS

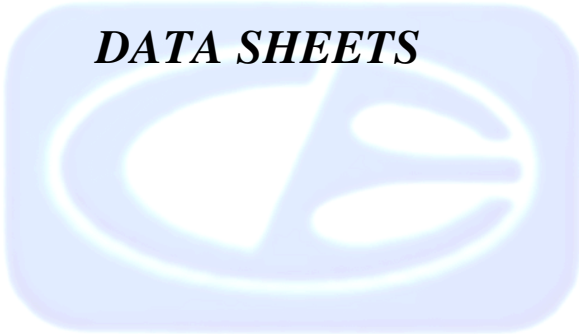

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

FUNDAMENTAL FIELD STRENGTH

FCC 15.249 RSS210Company: DiveNav, Inc.
EUT: CO / O2 Analyzer
Model: COOTWODate: 1/15/2016
Lab: P
Tested By: Matt Harrison**Compatible Electronics, Inc. FAC-3**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table	Tower	Comments
2402.00	102.97	H	113.97	-11.00	Peak	45.00	1.30	X Axis
2402.00	82.97	H	93.97	-11.00	Avg	45.00	1.30	X Axis
2402.00	97.25	V	113.97	-16.72	Peak	100.00	1.10	X Axis
2402.00	77.25	V	93.97	-16.72	Avg	100.00	1.10	X Axis
2440.00	102.55	H	113.97	-11.42	Peak	45.00	1.70	X Axis
2440.00	82.55	H	93.97	-11.42	Avg	45.00	1.70	X Axis
2440.00	96.91	V	113.97	-17.06	Peak	115.00	1.00	X Axis
2440.00	76.91	V	93.97	-17.06	Avg	115.00	1.00	X Axis
2480.00	103.03	H	113.97	-10.94	Peak	53.00	1.60	X Axis
2480.00	83.03	H	93.97	-10.94	Avg	53.00	1.60	X Axis
2480.00	95.20	V	113.97	-18.77	Peak	81.00	1.26	X Axis
2480.00	75.20	V	93.97	-18.77	Avg	81.00	1.26	X Axis

Test distance
3 meter**Brea Division**
114 Olinda Drive
Brea, CA 92823
(714) 579-0500**Agoura Division**
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600**Silverado Division**
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700**Lake Forest Division**
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

HARMONICS LOW CHANNEL HORIZONTAL

FCC 15.249Company: DiveNav
EUT: CO / O2 Analyzer
Model: COOTWODate: 1/15/2016
Lab: P
Tested By: Matt Harrison

Frequency: 2402 Mhz

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4804.0	46.07	H	73.98	-27.91	Peak	1.22	112	
4804.0	26.07	H	53.98	-27.91	Avg	1.22	112	
7206.0	--	H	73.98	--	Peak	--	--	No Emission Found
7206.0	--	H	53.98	--	Avg	--	--	
9608.0	--	H	73.98	--	Peak	--	--	No Emission Found
9608.0	--	H	53.98	--	Avg	--	--	
12010.0	--	H	73.98	--	Peak	--	--	No Emission Found
12010.0	--	H	53.98	--	Avg	--	--	
14412.0	--	H	73.98	--	Peak	--	--	No Emission Found
14412.0	--	H	53.98	--	Avg	--	--	
16814.0	--	H	73.98	--	Peak	--	--	No Emission Found
16814.0	--	H	53.98	--	Avg	--	--	
19216.0	--	H	73.98	--	Peak	--	--	No Emission Found
19216.0	--	H	53.98	--	Avg	--	--	
21618.0	--	H	73.98	--	Peak	--	--	No Emission Found
21618.0	--	H	53.98	--	Avg	--	--	
24020.0	--	H	73.98	--	Peak	--	--	No Emission Found
24020.0	--	H	53.98	--	Avg	--	--	

Test distance
3 meter**Brea Division**
114 Olinda Drive
Brea, CA 92823
(714) 579-0500**Agoura Division**
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600**Silverado Division**
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700**Lake Forest Division**
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

HARMONICS LOW CHANNEL VERTICAL

FCC 15.249Company: DiveNav
EUT: CO / O2 Analyzer
Model: COOTWODate: 1/15/2016
Lab: P
Tested By: Matt Harrison

Frequency: 2402 Mhz

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margi n	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4804.0	43.87	V	73.98	-30.11	Peak	1.63	250	
4804.0	23.87	V	53.98	-30.11	Avg	1.63	250	
7206.0	--	V	73.98	--	Peak	--	--	No Emission Found
7206.0	--	V	53.98	--	Avg	--	--	
9608.0	--	V	73.98	--	Peak	--	--	No Emission Found
9608.0	--	V	53.98	--	Avg	--	--	
12010.0	--	V	73.98	--	Peak	--	--	No Emission Found
12010.0	--	V	53.98	--	Avg	--	--	
14412.0	--	V	73.98	--	Peak	--	--	No Emission Found
14412.0	--	V	53.98	--	Avg	--	--	
16814.0	--	V	73.98	--	Peak	--	--	No Emission Found
16814.0	--	V	53.98	--	Avg	--	--	
19216.0	--	V	73.98	--	Peak	--	--	No Emission Found
19216.0	--	V	53.98	--	Avg	--	--	
21618.0	--	V	73.98	--	Peak	--	--	No Emission Found
21618.0	--	V	53.98	--	Avg	--	--	
24020.0	--	V	73.98	--	Peak	--	--	No Emission Found
24020.0	--	V	53.98	--	Avg	--	--	

Test
distance
3 meter

HARMONICS MID CHANNEL HORIZONTAL

FCC 15.249Company: DiveNav
EUT: CO / O2 Analyzer
Model: COOTWODate: 1/15/2016
Lab: P
Tested By: Matt Harrison

Frequency 2440 Mhz

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4880.0	47.05	H	73.98	-26.93	Peak	1.19	40	
4880.0	27.05	H	53.98	-26.93	Avg	1.19	40	
7320.0	55.99	H	73.98	-17.99	Peak	1.35	174	
7320.0	35.99	H	53.98	-17.99	Avg	1.35	174	
9760.0	--	H	73.98	--	Peak	--	--	No Emission Found
9760.0	--	H	53.98	--	Avg	--	--	
12200.0	--	H	73.98	--	Peak	--	--	No Emission Found
12200.0	--	H	53.98	--	Avg	--	--	
14640.0	--	H	73.98	--	Peak	--	--	No Emission Found
14640.0	--	H	53.98	--	Avg	--	--	
17080.0	--	H	73.98	--	Peak	--	--	No Emission Found
17080.0	--	H	53.98	--	Avg	--	--	
19520.0	--	H	73.98	--	Peak	--	--	No Emission Found
19520.0	--	H	53.98	--	Avg	--	--	
21960.0	--	H	73.98	--	Peak	--	--	No Emission Found
21960.0	--	H	53.98	--	Avg	--	--	
24400.0	--	H	73.98	--	Peak	--	--	No Emission Found
24400.0	--	H	53.98	--	Avg	--	--	

Test distance
3 meter**Brea Division**
114 Olinda Drive
Brea, CA 92823
(714) 579-0500**Agoura Division**
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600**Silverado Division**
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700**Lake Forest Division**
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

HARMONICS MID CHANNEL VERTICAL

FCC 15.249Company: DiveNav
EUT: CO / O2 Analyzer
Model: COOTWODate: 1/15/2016
Lab: P
Tested By: Matt Harrison

Frequency: 2440 Mhz

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4880.0	45.67	V	73.98	-28.31	Peak	1.82	229	
4880.0	25.67	V	53.98	-28.31	Avg	1.82	229	
7320.0	52.24	V	73.98	-21.74	Peak	3.04	0	
7320.0	32.24	V	53.98	-21.74	Avg	3.04	0	
9760.0	--	V	73.98	--	Peak	--	--	No Emission Found
9760.0	--	V	53.98	--	Avg	--	--	
12200.0	--	V	73.98	--	Peak	--	--	No Emission Found
12200.0	--	V	53.98	--	Avg	--	--	
14640.0	--	V	73.98	--	Peak	--	--	No Emission Found
14640.0	--	V	53.98	--	Avg	--	--	
17080.0	--	V	73.98	--	Peak	--	--	No Emission Found
17080.0	--	V	53.98	--	Avg	--	--	
19520.0	--	V	73.98	--	Peak	--	--	No Emission Found
19520.0	--	V	53.98	--	Avg	--	--	
21960.0	--	V	73.98	--	Peak	--	--	No Emission Found
21960.0	--	V	53.98	--	Avg	--	--	
24400.0	--	V	73.98	--	Peak	--	--	No Emission Found
24400.0	--	V	53.98	--	Avg	--	--	

Test
distance
3 meter**Brea Division**
114 Olinda Drive
Brea, CA 92823
(714) 579-0500**Agoura Division**
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600**Silverado Division**
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700**Lake Forest Division**
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

HARMONICS HIGH CHANNEL HORIZONTAL

FCC 15.249Company: DiveNav
EUT: CO / O2 Analyzer
Model: COOTWODate: 1/15/2016
Lab: P
Tested By: Matt Harrison

Frequency: 2480 Mhz

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4960.0	48.17	H	73.98	-25.81	Peak	1.44	335	
4960.0	28.17	H	53.98	-25.81	Avg	1.44	335	
7440.0	51.71	H	73.98	-22.27	Peak	1.00	210	
7440.0	31.71	H	53.98	-22.27	Avg	1.00	210	
9920.0	--	H	73.98	--	Peak	--	--	No Emission Found
9920.0	--	H	53.98	--	Avg	--	--	
12400.0	--	H	73.98	--	Peak	--	--	No Emission Found
12400.0	--	H	53.98	--	Avg	--	--	
14880.0	--	H	73.98	--	Peak	--	--	No Emission Found
14880.0	--	H	53.98	--	Avg	--	--	
17360.0	--	H	73.98	--	Peak	--	--	No Emission Found
17360.0	--	H	53.98	--	Avg	--	--	
19840.0	--	H	73.98	--	Peak	--	--	No Emission Found
19840.0	--	H	53.98	--	Avg	--	--	
22320.0	--	H	73.98	--	Peak	--	--	No Emission Found
22320.0	--	H	53.98	--	Avg	--	--	
24800.0	--	H	73.98	--	Peak	--	--	No Emission Found
24800.0	--	H	53.98	--	Avg	--	--	

Test distance
3 meter**Brea Division**
114 Olinda Drive
Brea, CA 92823
(714) 579-0500**Agoura Division**
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600**Silverado Division**
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700**Lake Forest Division**
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

HARMONICS HIGH CHANNEL VERTICAL

FCC 15.249

Company: DiveNav
EUT: CO / O2 Analyzer
Model: COOTWO

Date: 1/15/2016
Lab: P
Tested By: Matt Harrison

Frequency: 2480 Mhz

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4960.0	49.84	V	73.98	-24.14	Peak	1.79	271	
4960.0	29.84	V	53.98	-24.14	Avg	1.79	271	
7440.0	51.57	V	73.98	-22.41	Peak	3.14	223	
7440.0	31.57	V	53.98	-22.41	Avg	3.14	223	
9920.0	--	V	73.98	--	Peak	--	--	No Emission Found
9920.0	--	V	53.98	--	Avg	--	--	
12400.0	--	V	73.98	--	Peak	--	--	No Emission Found
12400.0	--	V	53.98	--	Avg	--	--	
14880.0	--	V	73.98	--	Peak	--	--	No Emission Found
14880.0	--	V	53.98	--	Avg	--	--	
17360.0	--	V	73.98	--	Peak	--	--	No Emission Found
17360.0	--	V	53.98	--	Avg	--	--	
19840.0	--	V	73.98	--	Peak	--	--	No Emission Found
19840.0	--	V	53.98	--	Avg	--	--	
22320.0	--	V	73.98	--	Peak	--	--	No Emission Found
22320.0	--	V	53.98	--	Avg	--	--	
24800.0	--	V	73.98	--	Peak	--	--	No Emission Found
24800.0	--	V	53.98	--	Avg	--	--	

Test
distance
3 meter



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

***EMISSIONS RADIATED OUTSIDE OF THE FUNDAMENTAL
FREQUENCY BAND
DATA SHEETS***



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

BAND EDGES LOW CHANNEL

FCC 15.249

Company: DiveNav
EUT: CO/O2 Analyzer
Model: COOTWO
Duty Cycle Correction Factor: -20.00


Date: 1/15/2016
Lab: R
Test ENG: Matt H.

Compatible Electronics, Inc. FAC-3 (Lab R)


Freq. (MHz)	Level (dBμV/m)	Pol	Limit (dBμV)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2402.00	102.97	H	--	--	Peak	1.3	45	Fundamental
MD	-36.55	H	--	--	MD	1.3	45	Marker Delta
2400.00	66.42	H	73.98	-7.56	Peak	1.3	45	Method Used
2400.00	46.42	H	53.98	-7.56	Avg	1.3	45	
2402.00	97.25	V	--	--	Peak	1.1	100	Fundamental
MD	-35.90	V	--	--	MD	1.1	100	Marker Delta
2400.00	61.35	V	73.98	-12.63	Peak	1.1	100	Method Used
2400.00	41.35	V	53.98	-12.63	Avg	1.1	100	

Test distance
3 meter




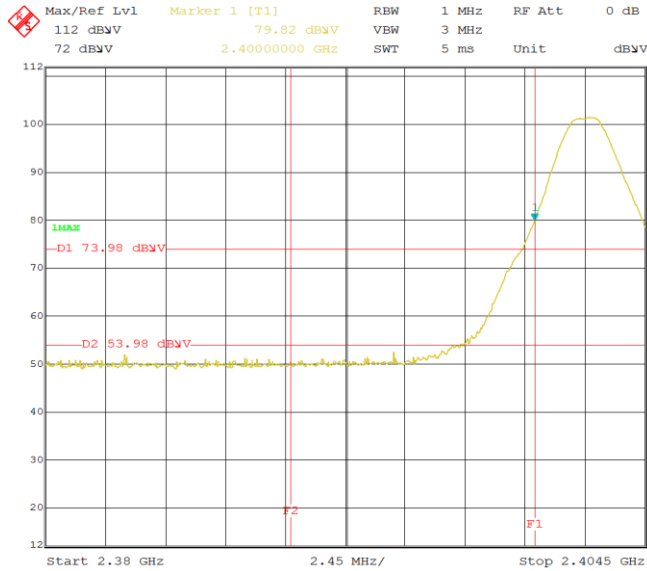


Title: COOTWO
Comment A: LBE, H

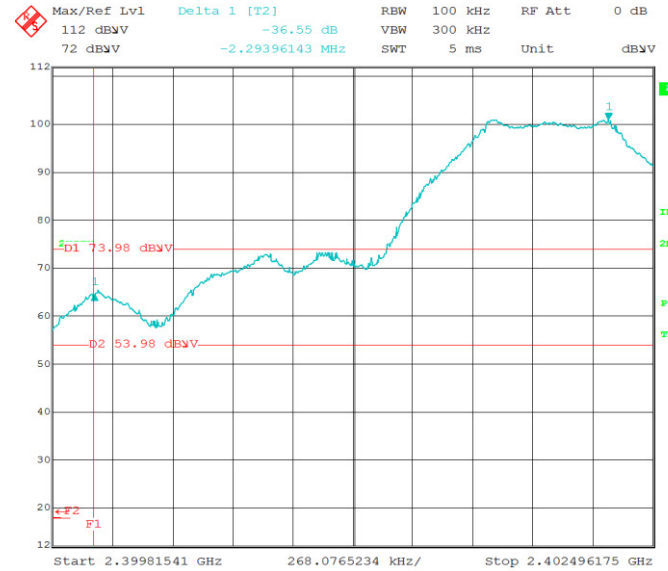

Title: COOTWO
Comment A: LBE

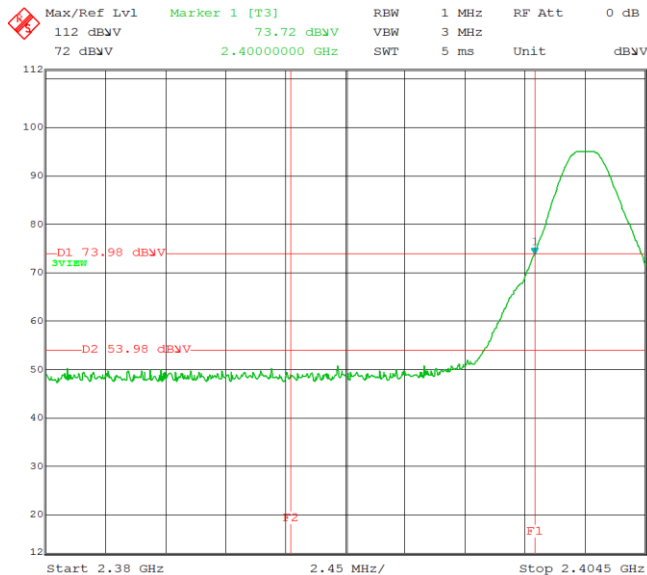

Title: COOTWO
Comment A: LBE, V

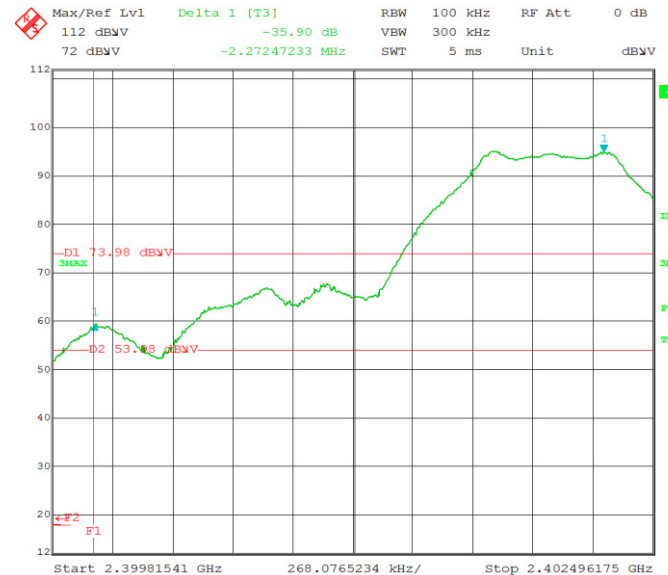

Title: COOTWO
Comment A: LBE, V

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

BAND EDGES HIGH CHANNEL

FCC 15.249



Company: DiveNav
EUT: CO / O2 Analyzer
Model: COOTWO

Date: 1/15/2016
Lab: P
ENG: Matt Harrison

Compatible Electronics, Inc. FAC-3 (Lab R)

Freq. (MHz)	Level (dBμV/m)	Pol	Limit (dBμV)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2483.50	63.74	H	73.98	-10.24	Peak	1.6	53	No Marker Delta
2483.50	43.74	H	53.98	-10.24	Avg	1.6	53	Method Used
2489.33	59.25	V	73.98	-14.73	Peak	1.26	81	No Marker Delta
2489.33	39.25	V	53.98	-14.73	Avg	1.26	81	Method Used

Test distance
3 meter

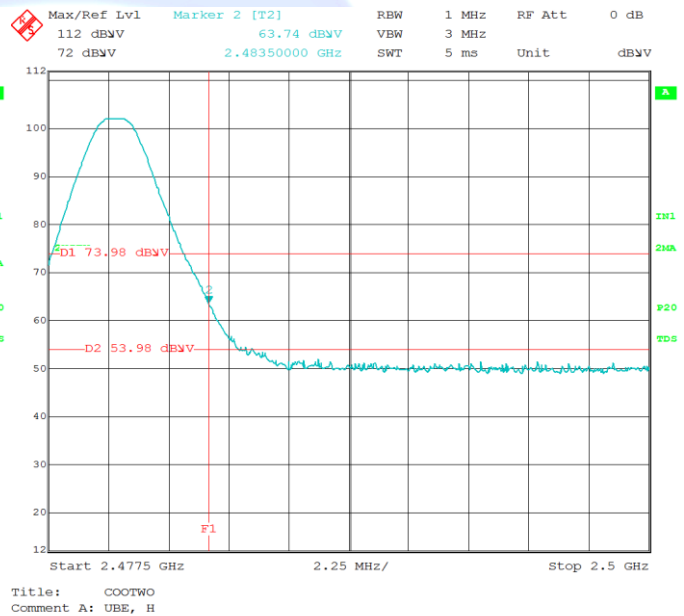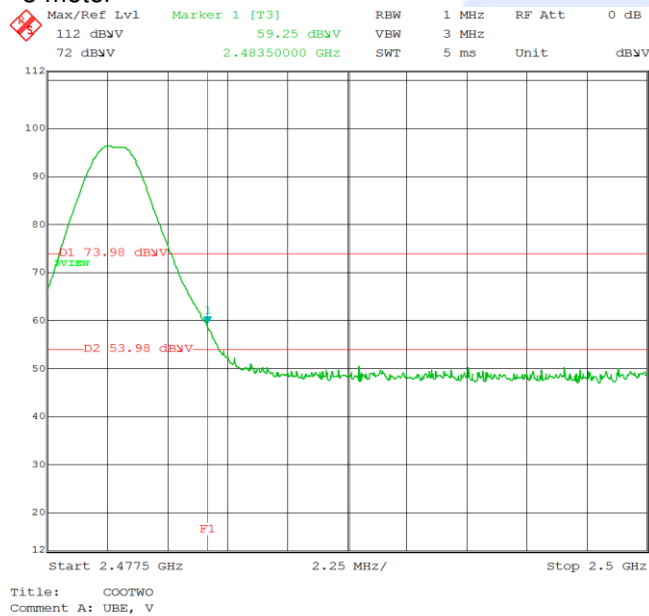

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400