



TEST REPORT nr. R15140701

Federal Communication Commission (FCC)

Test item

Description: TRANSCEIVER UNIT
Trademark: REMDEVICE
Model/Type: EB / TYPE: EBM6
FCC ID: RTF-EBEBM6

Test Specification

Standard: FCC Rules & Regulations, Title 47:2014
Part 15 paragraph(s): 203, 204, 207, 209 and 247

Client's name: REMDEVICE S.r.l.

Address: Via Munari, 72 – 36055 Nove (VI) – ITALY

Manufacturer's name : Same as client

Address: --

Report

Tested by: A. Bertezolo – Technician

Approved by: R. Beghetto – Laboratory Manager

Date of issue: 23.06.16

Contents: 82 pages

This test report shall not be reproduced except in full without the written approval of CMC.
The test results presented in this report relate only to the item tested.



Index

1. SUMMARY	3
2. DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	4
2.1 TEST SITE	4
3. TESTING AND SAMPLING	4
4. OPERATIVE CONDITIONS	4
5. PHOTOGRAPH(S) OF EUT	5
5.1 PHOTOGRAPH(S) OF EUT	5
6. EQUIPMENT LIST	6
7. MEASUREMENT UNCERTAINTY	7
8. REFERENCE DOCUMENTS	8
9. DEVIATION FROM TEST SPECIFICATION	9
10. TEST CASE VERDICTS	9
11. RESULTS	10
11.1 ANTENNA REQUIREMENTS	11
11.2 CONDUCTED EMISSIONS	12
11.3 EMISSIONS IN RESTRICTED FREQUENCY BANDS AND IN UNRESTRICTED FREQUENCY BANDS	18
11.4 DTS BANDWIDTH	44
11.5 BAND EDGE	53
11.6 FUNDAMENTAL EMISSION OUTPUT POWER	59
11.7 MAXIMUM POWER SPECTRAL DENSITY LEVEL IN THE FUNDAMENTAL EMISSION	68
11.8 SPURIOUS EMISSION	77
11.9 MAXIMUM PERMISSIBLE EXPOSURE	82



1. Summary

Standard:

FCC Rules & Regulations, Title 47:2014
Part 15 paragraph(s): 203, 204, 207, 209 and 247

Test specifications	Environmental Phenomena	Tests sequence	Result
Part 15.203	Antenna requirements	1	Complies
Part 15.207	Conducted emissions	2	Complies
Part 15.209	Emissions in restricted frequency bands and in unrestricted frequency bands	3	Complies
Part 15.209	DTS bandwidth	4	Complies
Part 15.247 (d)	Band edge	5	Complies
Part 15.209 and 15.247	Fundamental emission output power	6	Complies
Part 15.209 and 15.247	Maximum power spectral density level in the fundamental emission	7	Complies
Part 15.209	Spurious emission	8	Complies
Part 1.1310	Maximum permissible exposure	9	Complies

The Test Report was given to the Client representatives for necessary documentation of ratification of the tested equipment and it is valid for the FCC certification

2. Description of Equipment under test (EUT)

Power supply : 12/24 Vdc

Serial Number..... : M003214

Type of equipment : ☒ Transmitter Unit
 ☒ Receiver Unit

Type of station : ☒ Fixed station
 ☐ Portable station
 ☐ Mobile station

Frequency band : F_L: 902,5 MHz F_M: 915,0 MHz F_H: 927,5 MHz

2.1 Test Site

Company..... : CMC Centro Misure Compatibilità S.r.l.
Address : Via della Fisica, 20
36016 Thiene (VI) – ITALY
Test site facility's FCC registration number : 271947

3. Testing and sampling

Date of receipt of test item : 07.07.15

Testing start date : 01.12.15

Testing end date : 23.02.16

Samples tested nr..... : 1

Sampling procedure. : Equipment used for testing was picked up by the manufacturer, at the end of the production process with random criterion

Internal identification : adhesive label with the product number P150803



4. Operative conditions

EUT exercising : EUT in continuous transmission at maximum power



5. Photograph(s) of EUT

5.1 Photograph(s) of EUT

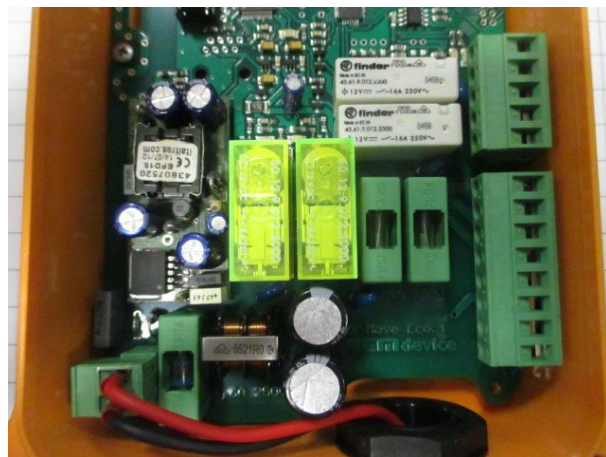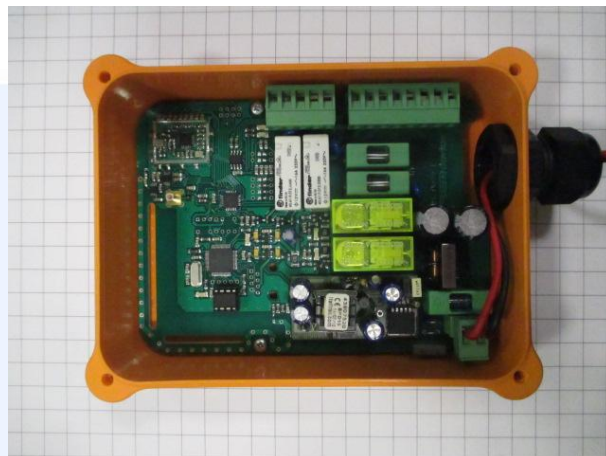



6. Equipment list

<i>Id. number</i>	<i>Manufacturer</i>	<i>Model</i>	<i>Description</i>	<i>Serial number</i>	<i>Last calibration</i>	<i>Due date calibration</i>
CMC S010	Rohde & Schwarz	ESH3-Z2	Impulses Limiting Device	---	January '16	January '17
CMC S108	EMCO	3115	Horn Antenna	9811-5622	May '13	May '16
CMC S127	Schaffner	HLA6120	Loop Antenna	1191	January '16	January '19
CMC S129	Rohde & Schwarz	ESPI7	Receiver	836.914/004	January '16	January '17
CMC S136	Schwarzbeck	VULB 9163	Broadband Antenna	9136-205	May '13	May '16
CMC S164	Rohde & Schwarz	ESU26	EMC interference receiver	100052	January '16	January '17
CMC S200	Schwarzbeck	NSLK 8128	V-LISN	8128-273	January '16	January '17
CMC S227	Rohde & Schwarz	ESR7	EMI Test Receiver 7GHz	101121	January '16	January '17



7. Measurement uncertainty

Test	Expanded Uncertainty	note
Conducted Emission		
(50Ω/50μH AMN) - (9 kHz – 150 kHz)	±3.6 dB	1
(50Ω/50μH AMN) - (150 kHz – 30 MHz)	±3.0 dB	1
(Voltage probe) - (150 kHz – 30 MHz)	±2.8 dB	1
(50Ω/5μH AMN) - (150 kHz – 108 MHz)	±2.6 dB	1
Discontinuous Conducted Emission		
Conducted Emission (50Ω/50μH AMN) - (150 kHz – 30 MHz)	±3.0 dB	1
Disturbance Power (30 MHz – 300 MHz)		
	±3.7 dB	1
Radiated Emission		
(0,150 MHz – 30 MHz)	±4.0 dB	1
(30 MHz – 1000 MHz)	±4.3 dB	1
(1 GHz – 6 GHz)	±4.5 dB	1
Electromagnetic field EMF		
	±10.5 %	1
Harmonic current emissions test		
	±1.8 %	1
Voltage fluctuation and flicker test		
	±2.6 %	1
Insertion loss test		
	±2.0 dB	1
Radiated electromagnetic disturbance test (loop antenna)		
	±2.1 dB	1
Radiated electromagnetic field immunity test		
	0.81 V/m at 3V/m	1
Pulse modulated radiated electromagnetic field immunity test		
	0.81 V/m at 3V/m	1
Injected currents immunity test		
	0.45 V at 3V	1
Bulk current		
	3.7 mA at 60 mA	1
Power frequency magnetic field immunity test		
	0.1 A/m at 10 A/m	1
Effective radiated power (F < 1GHz)		
	±4.3 dB	1
Effective radiated power (F > 1GHz)		
	±3.7 dB	1
Frequency error		
	< 1x10 ⁻⁷	1
Modulation bandwidth		
	< 1x10 ⁻⁷	1
Conducted RF power and spurious emission		
	±0.7 dB	1
Adjacent channel power		
	±1.2 dB	1
Blocking		
	±1.2 dB	1
Electrostatic discharge immunity test		
		2
Electrical fast transients / burst immunity test		
		2
Surge immunity test		
		2
Pulse magnetic field immunity test		
		2
Damped oscillatory magnetic field immunity test		
		2
Short interruption immunity test		
		2
Voltage transient emission test		
	±2.2 %	1
Transient immunity test		
		2

Rev_15_01 date 04/05/2015

Note 1:

The expanded uncertainty reported according to EN55016-4-2:2011 is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of p = 95%

Note 2:

It has been demonstrated that the used test equipment meets the specified requirements in the standard with at least a 95% confidence, covering factor k = 2.



8. Reference documents

Reference no.	Description
FCC Rules and Regulation Title 47 part 15:2014	--
ANSI C63.4:2014	American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz – 40 GHz
ANSI C63.10:2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01 DTS Meas Guidance v03r03	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247
Internal Procedure PM001 rev. 2.0 (Quality Manual)	Measure Procedure
Internal procedure INC_M rev. 8.2 (Quality Manual)	Measurement uncertainty calculation



9. Deviation from test specification

In agreement with the client, emission tests were performed with peak detector.

At the frequencies where the measures exceed the limit or within 6 dB from it, the test was repeated with quasi-peak detector and/or average detector.

10. Test case verdicts

Test case does not apply to the test object..... : N.A.

Test item does meet the requirement..... : Complies

Test item does not meet the requirement..... : Does not comply

Test not performed : N.E.






11. Results

In this clause tests results are reported.

Measurement uncertainty is in accordance with document CMC INC_M rev. 8.2.

Judgement of compliance:

Case 1	Case 2	Case 3	Case 4
			
The sample complies with the requirement.	The sample complies with the requirement.	The sample does not comply with the requirement.	The sample does not comply with the requirement.
The measurement results is within the specification limit when the measurement uncertainty is taken into account.	It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty although the measurement result is below the limit.	It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty also the measurement result is upper the limit.	The measurement results is outside the specification limit when the measurement uncertainty is taken into account.

In agreement with ILAC-G8: 03/2009 Guidelines on the Reporting of Compliance with Specification.



11.1 Antenna requirements

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.203 and 15.204
- Internal procedure PM001
- See clause 4 of this test report

Test configuration

Test site:
Laboratory

Auxiliary equipment:
See clause 4 of this test report

EUT exercising

See clause 4 of this test report

Test equipment used

--
Measurement uncertainty: See clause 7 of this test report

Test specification

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.
The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded

Environmental conditions

Temperature (°C)	Atmospheric pressure (kPa)	Relative humidity (%)
23	100	42

Result

Antenna Type	External R.F. power amplifier	Gain	Remarks	Results
Integral antenna	Not Present	3,2 dBi	--	Complies
External antenna	Not Present	3,2 dBi	--	Complies

Result: The requirements are met



11.2 Conducted emissions

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.207
- Internal procedure PM001
- See clause 4 of this test report

Test configuration and test method

Test site:
Shielded chamber

Auxiliary equipment:
See clause 4 of this test report

EUT exercising

See clause 4 of this test report

Test equipment used

CMC S010, CMC S200, CMC S206
Measurement uncertainty: See clause 7 of this test report

Test specification

Port: Main port
Frequency range: 150 kHz – 30 MHz

Environmental conditions


Temperature (°C)	Atmospheric pressure (kPa)	Relative humidity (%)
21	98	46

Acceptance limits

Frequency range (MHz)	dB(μV) Quasi-peak	dB(μV) Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50



Setup

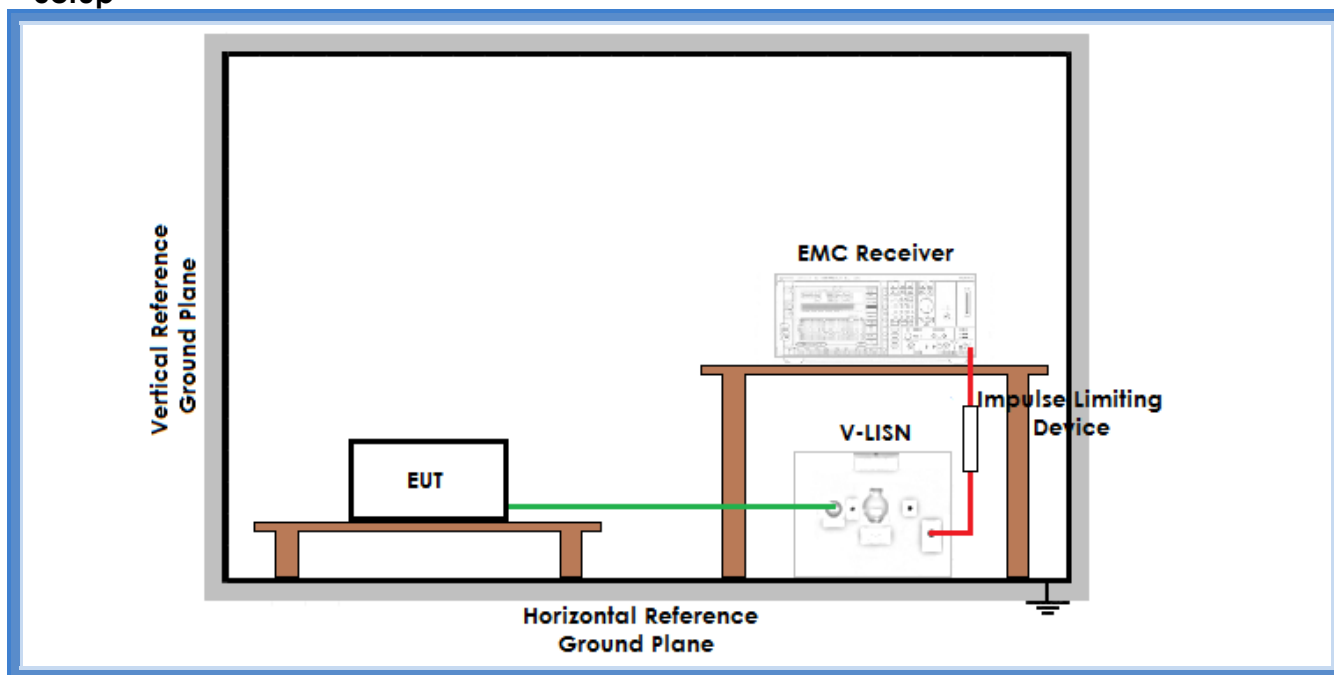

Result

Line	Graphs	Remarks	Result
+12 Vdc	G15140759	Integrated antenna	Complies
-12 Vdc	G15140760	Integrated antenna	Complies
+12 Vdc	G15140761	External antenna	Complies
-12 Vdc	G15140762	External antenna	Complies
Remarks: --			

Graphs Legend


PK: Peak; QP [1s] (quasi-peak at 1 second) values are marked with a +

AV: Average; AV [1s] (average at 1 second) values are marked with a X



Graphs


G15140759

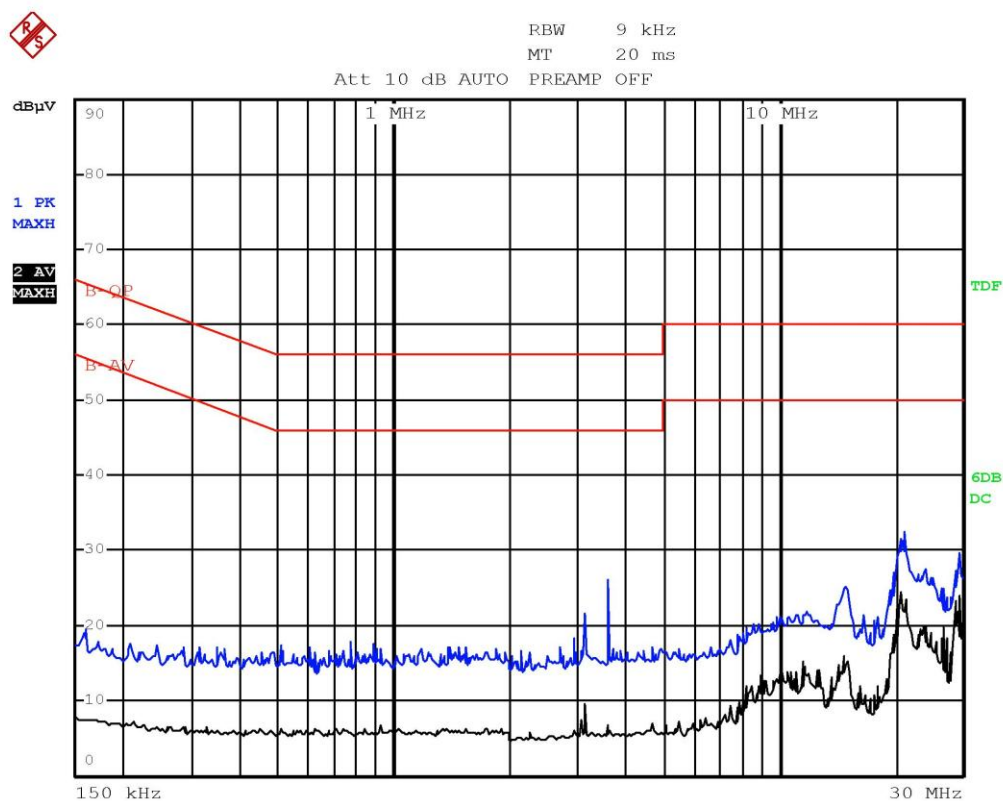

Bertezzo 15140759




G15140760

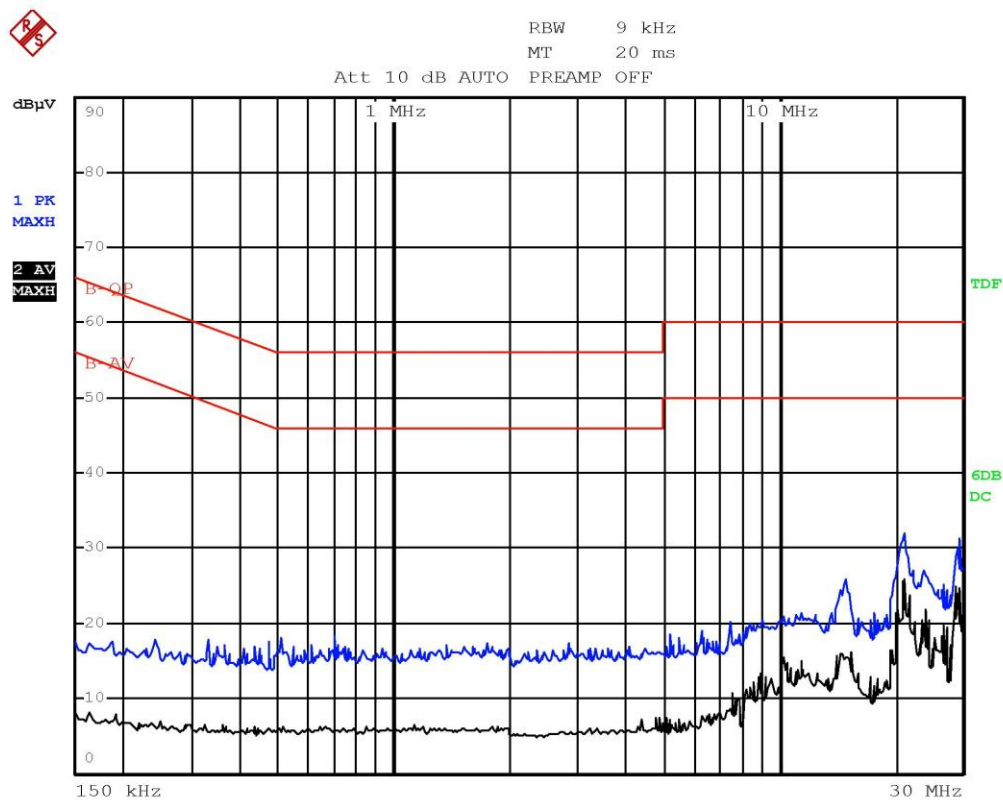

Bertezzo 15140760




G15140761

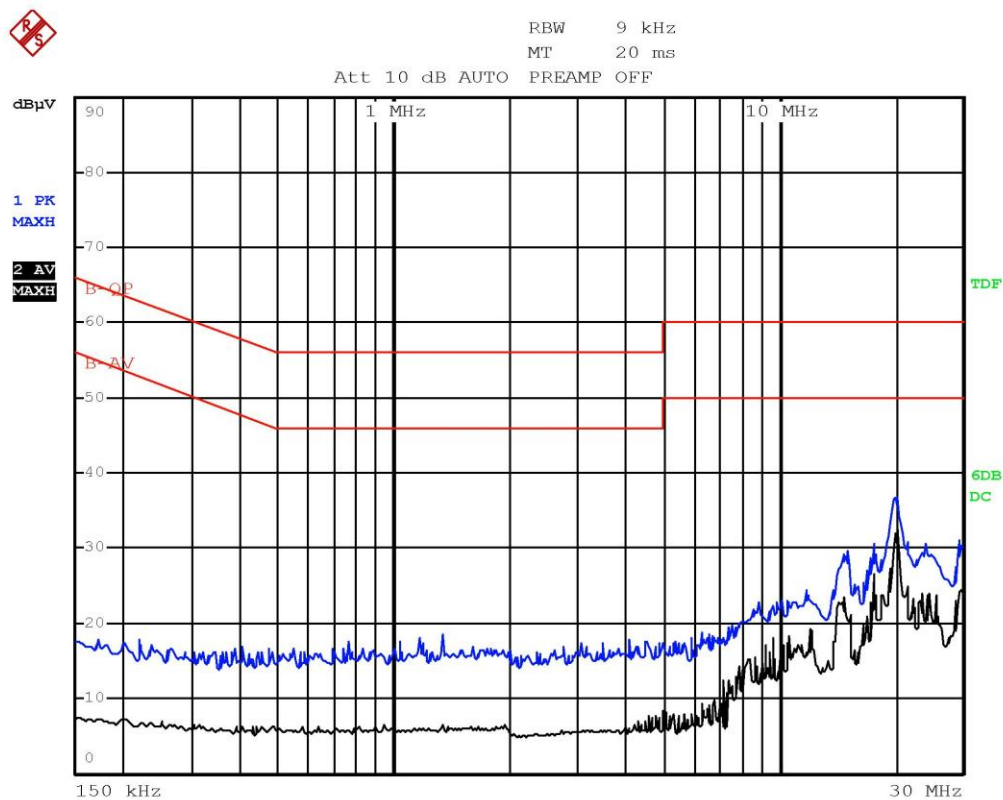

Bertezolo 15140761



G15140762

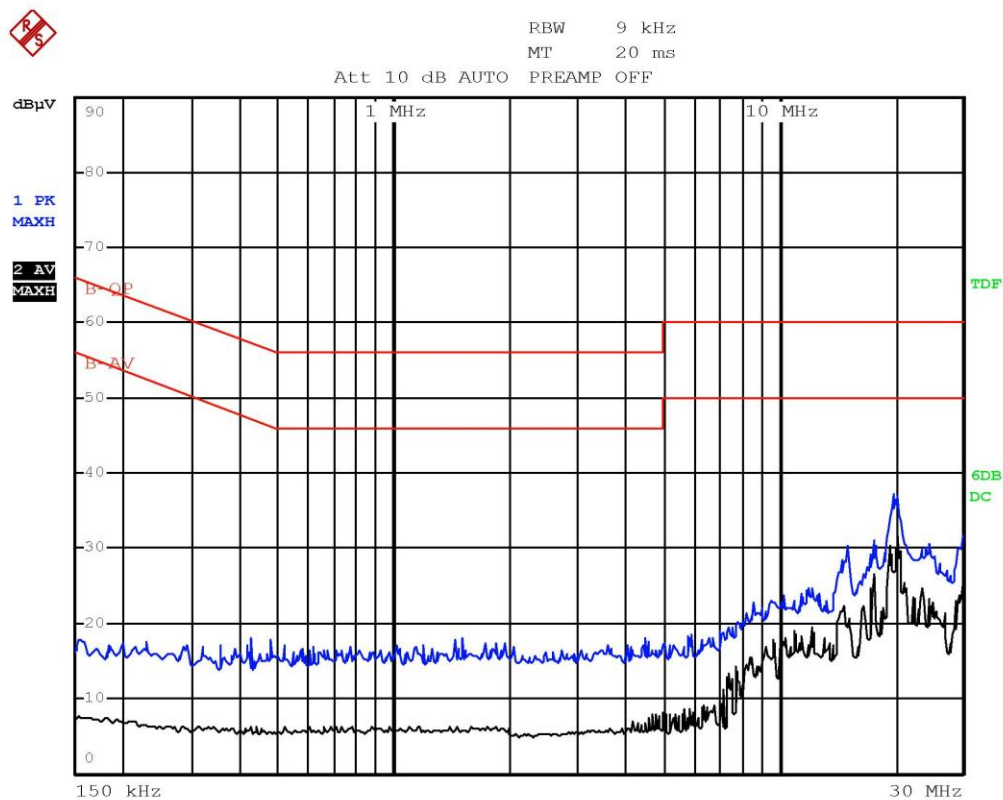

Bertezzo 15140762

Result: The requirements are met



11.3 Emissions in restricted frequency bands and in unrestricted frequency bands

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part. 15.209
- Internal procedure PM001
- See clause 4 of this test report

Test configuration

Test site:
Semi-anechoic chamber

Auxiliary equipment:
See clause 4 of this test report

EUT exercising

See clause 4 of this test report

Test equipment used

CMC S108, CMC S127, CMC S136, CMC S164,
CMC S227
Measurement uncertainty: See clause 7 of this
test report

Test specification

Port: Enclosure
Frequency range: 0,009 MHz – 1000 MHz
Antenna polarization: Horizontal (H) – Vertical (V)
EUT – Antenna distance:
10 m for frequencies $\leq$ 1000 MHz
3 m for frequencies $>$ 1000 MHz

Environmental conditions

Temperature (°C)	Atmospheric pressure (kPa)	Relative humidity (%)
22	100	42




Acceptance limits

Frequency range (MHz)	Limits [dB(μV/m)]	
0,009 to 0,490	108,51 to 73,80	
0,490 to 1,705	53,80 to 42,97	
1,705 to 30	49,54	
30 to 88	30	
88 to 216	33,52	
216 to 960	36,02	
960 to 1000	43,98	
	Linear average detector [dB(μV/m)]	Peak detector [dB(μV/m)]
Above 1000	53,98	73,98


Remarks: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

Setup


Frequency ≤ 30 MHz

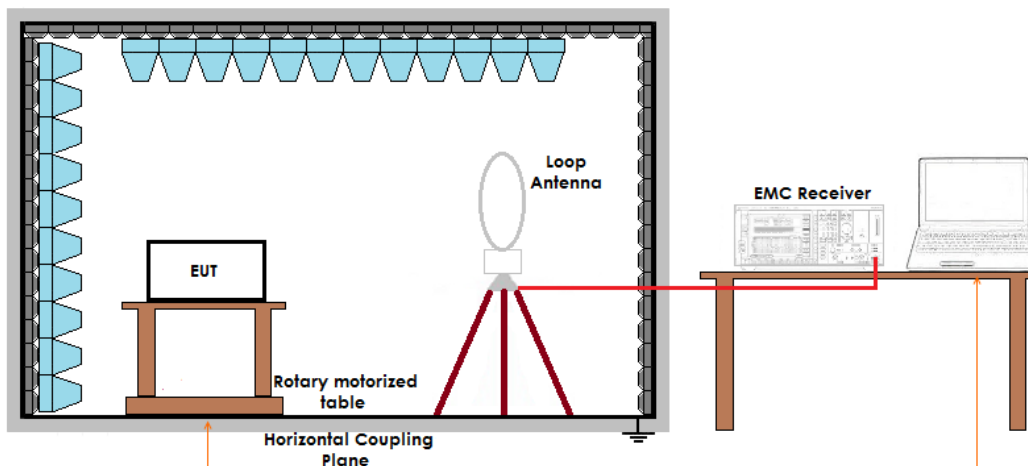

Frequency ≤ 1 GHz

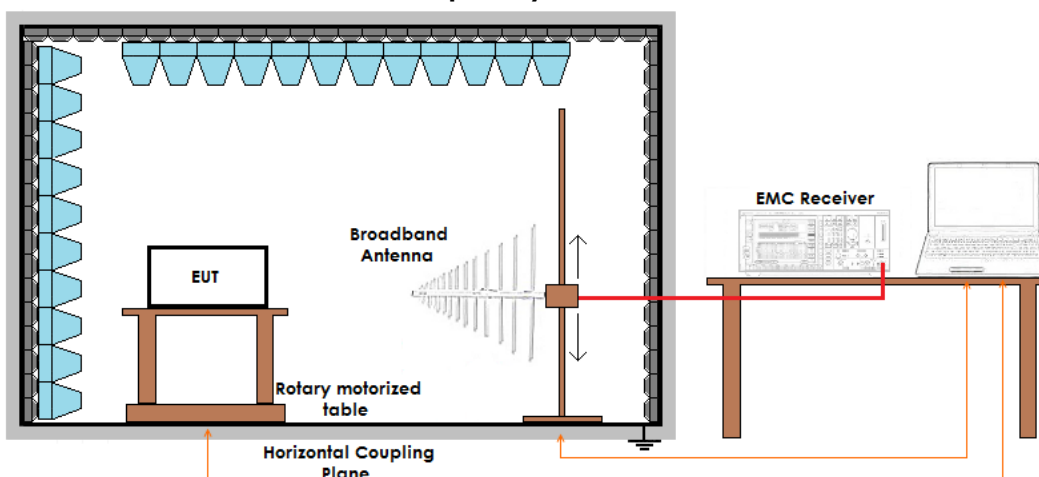

Frequency > 1 GHz

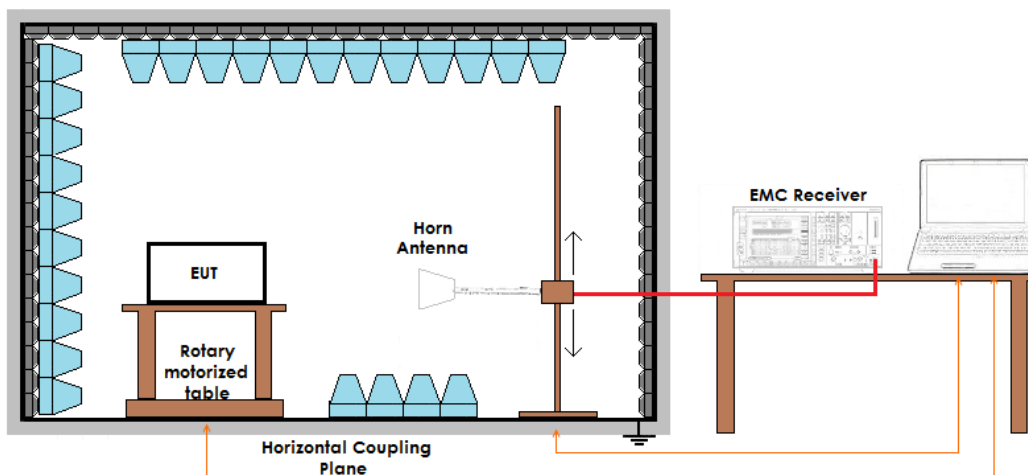



Result

Polarization	Frequency Range (MHz)	Graphs	Remarks	Result
Loop	0,009 – 30	G15140756	Worst case	Complies
V	30 – 1000	G15140752	Lowest channel	Complies
H	30 – 1000	G15140753	Lowest channel	Complies
V	30 – 1000	G15140751	Medium channel	Complies
H	30 – 1000	G15140750	Medium channel	Complies
V	30 – 1000	G15140755	Highest channel	Complies
H	30 – 1000	G15140754	Highest channel	Complies
V	1000 – 10000	G15140757	Worst case	Complies
H	1000 – 10000	G15140758	Worst case	Complies

Remarks: Integrated antenna.
Peaks above the limits are due to the main transmitting frequencies

Polarization	Frequency Range (MHz)	Graphs	Remarks	Result
Loop	0,009 – 30	G15140727	Worst case	Complies
V	30 – 1000	G15140709	Lowest channel	Complies
H	30 – 1000	G15140710	Lowest channel	Complies
V	30 – 1000	G15140712	Medium channel	Complies
H	30 – 1000	G15140711	Medium channel	Complies
V	30 – 1000	G15140713	Highest channel	Complies
H	30 – 1000	G15140714	Highest channel	Complies
V	1000 – 10000	G15140708	Worst case	Complies
H	1000 – 10000	G15140707	Worst case	Complies

Remarks: External antenna.
Peaks above the limits are due to the main transmitting frequencies

Graphs Legend


PK: Peak; QP [1s] (quasi-peak at 1 second) values are marked with a +
AV: Average; AV [1s] (average at 1 second) values are marked with a x



Graphs

G15140707

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Gandini 15140707
Test Spec
Horiz

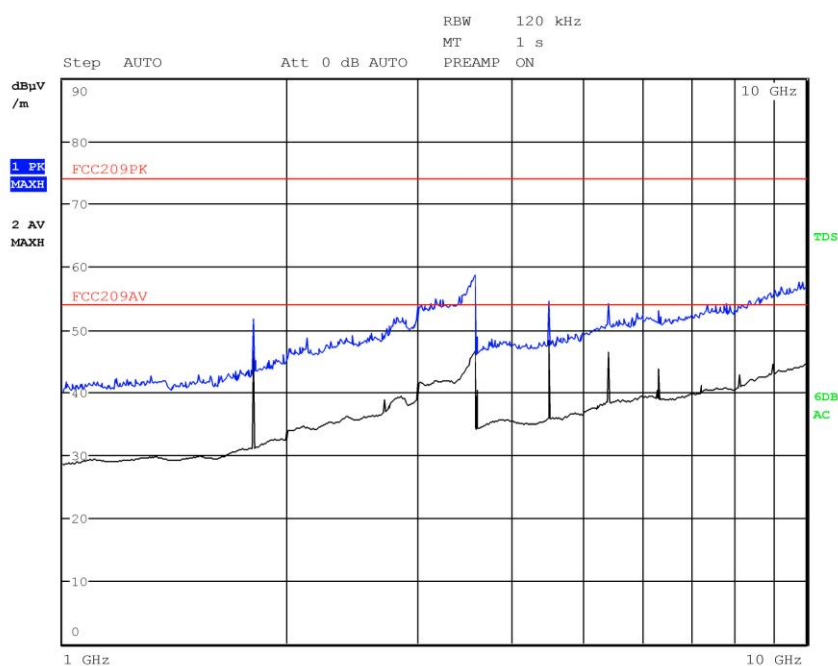


Final Measurement

Meas Time: 1 s
Margin: 6 dB
Subranges: 0



G15140708

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Gandini 15140708
Test Spec
Vert

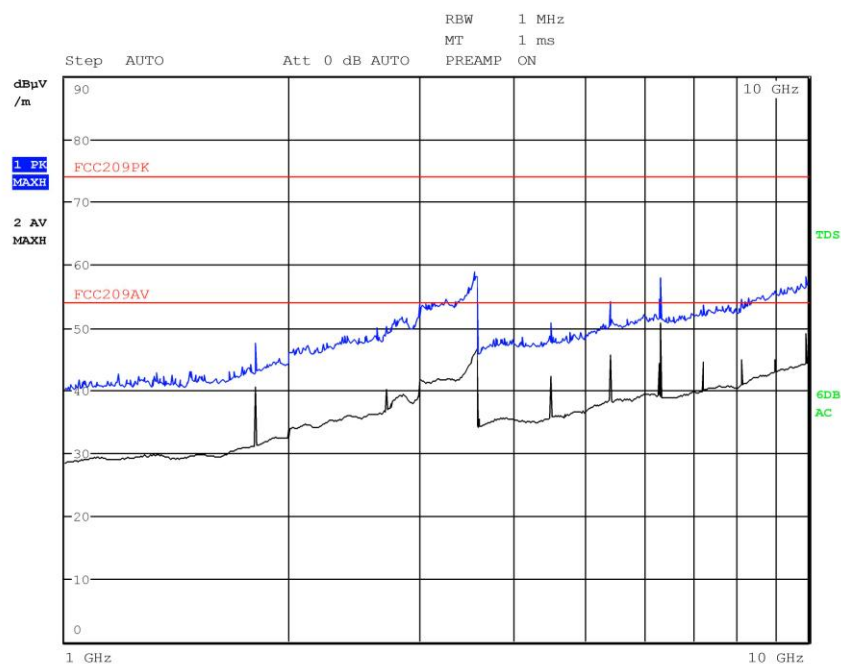


Final Measurement

Meas Time: 1 s
Margin: 6 dB
Subranges: 0



G15140709


Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Gandini 15140709
Test Spec
Vert

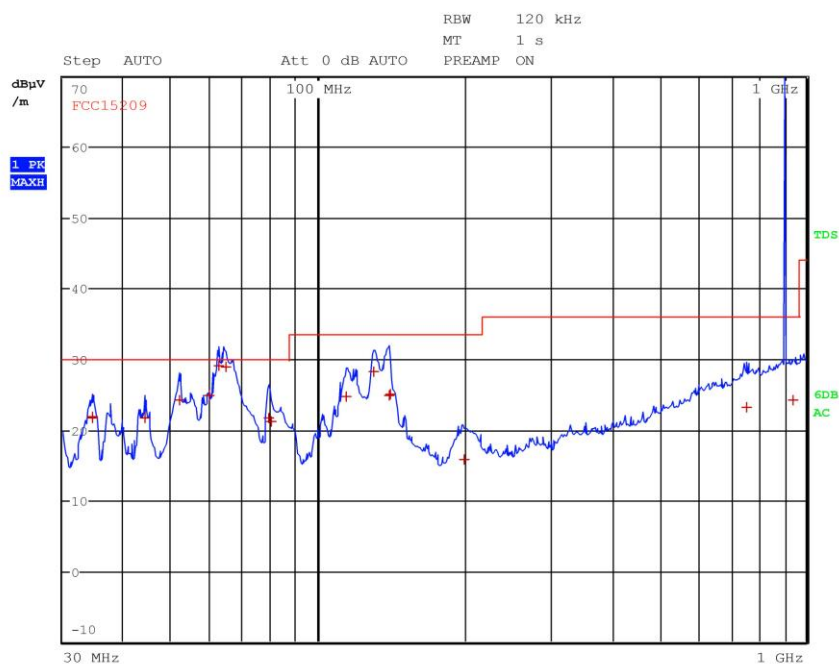



G15140710

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Gandini 15140710
Test Spec
Horiz

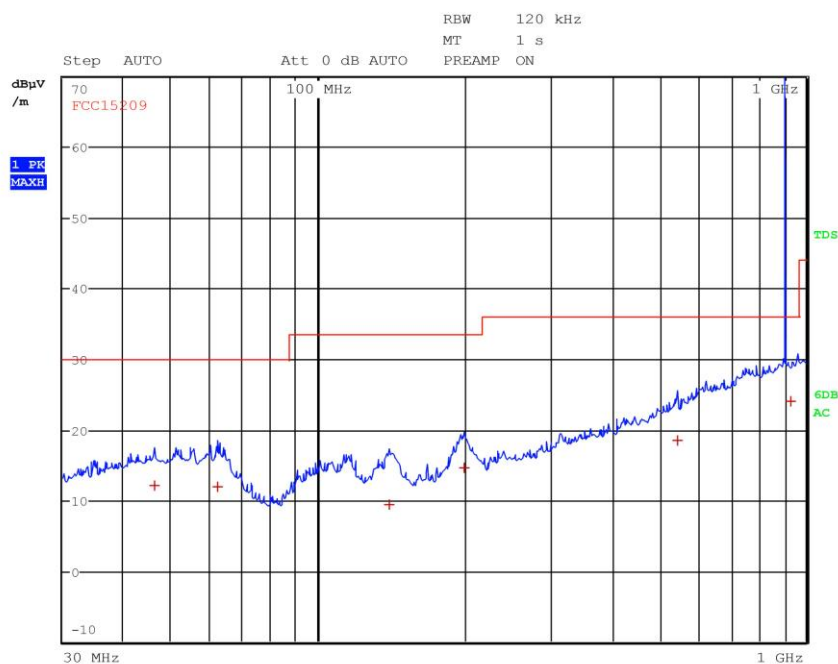

Final Measurement


Meas Time: 1 s
Margin: 20 dB
Subranges: 6

Trace	Frequency	Level (dBμV/m)	Detector	Delta Limit/dB
1	46.120000000 MHz	12.07	Quasi Peak	-17.93
1	62.160000000 MHz	11.97	Quasi Peak	-18.03
1	140.040000000 MHz	9.40	Quasi Peak	-24.12
1	198.960000000 MHz	14.68	Quasi Peak	-18.84
1	545.520000000 MHz	18.49	Quasi Peak	-17.53
1	932.000000000 MHz	24.09	Quasi Peak	-11.93



G15140711

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Gandini 15140711
Test Spec
Horiz

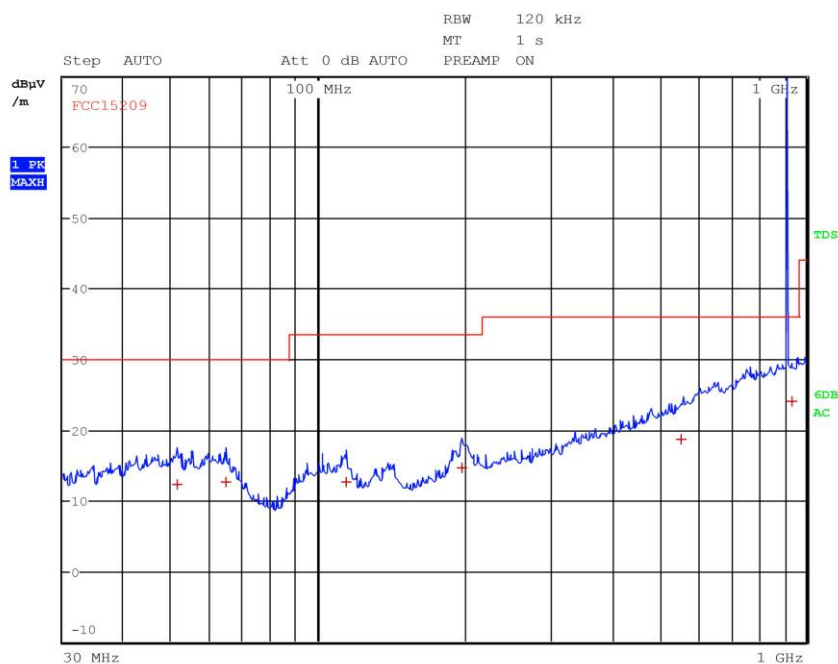

Final Measurement


Meas Time: 1 s
Margin: 20 dB
Subranges: 6

Trace	Frequency	Level (dBμV/m)	Detector	Delta Limit/dB
1	51.440000000 MHz	12.34	Quasi Peak	-17.66
1	64.640000000 MHz	12.64	Quasi Peak	-17.36
1	114.160000000 MHz	12.56	Quasi Peak	-20.96
1	196.960000000 MHz	14.68	Quasi Peak	-18.84
1	553.400000000 MHz	18.70	Quasi Peak	-17.32
1	932.200000000 MHz	24.06	Quasi Peak	-11.96



G15140712

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Gandini 15140712
Test Spec
Vert

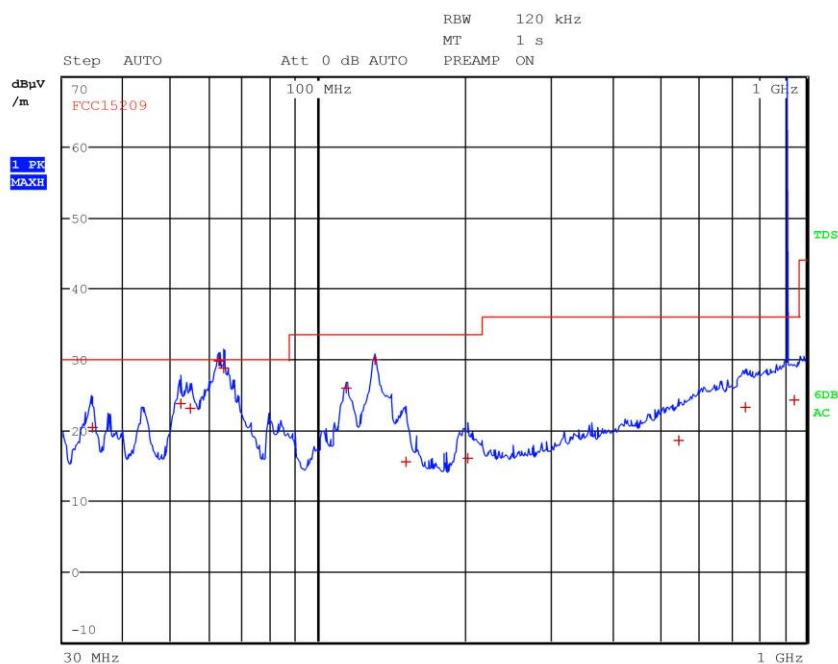



Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Gandini 15140712
Test Spec
Vert

Final Measurement


Meas Time: 1 s
Margin: 20 dB
Subranges: 12

Trace	Frequency	Level (dBµV/m)	Detector	Delta Limit/dB
1	34.480000000 MHz	20.42	Quasi Peak	-9.58
1	52.200000000 MHz	23.67	Quasi Peak	-6.33
1	54.560000000 MHz	23.05	Quasi Peak	-6.95
1	62.560000000 MHz	29.72	Quasi Peak	-0.28
1	64.120000000 MHz	28.70	Quasi Peak	-1.30
1	114.400000000 MHz	25.90	Quasi Peak	-7.62
1	130.880000000 MHz	29.85	Quasi Peak	-3.67
1	150.920000000 MHz	15.49	Quasi Peak	-18.03
1	202.480000000 MHz	15.97	Quasi Peak	-17.55
1	547.640000000 MHz	18.49	Quasi Peak	-17.53
1	751.840000000 MHz	23.12	Quasi Peak	-12.90
1	945.360000000 MHz	24.16	Quasi Peak	-11.86



G15140713

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Gandini 15140713
Test Spec
Vert

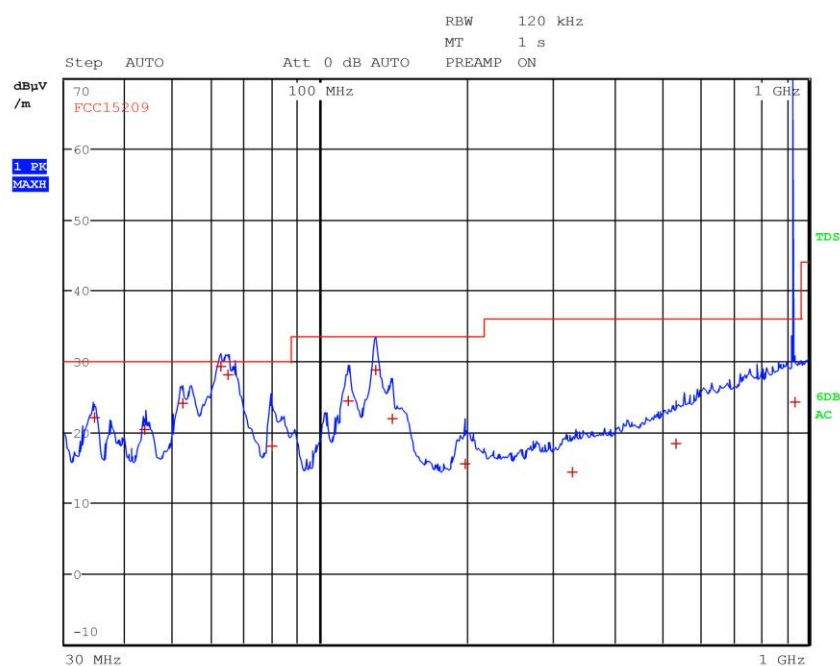



Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Gandini 15140713
Test Spec
Vert

Final Measurement


Meas Time: 1 s
Margin: 20 dB
Subranges: 13

Trace	Frequency	Level (dBµV/m)	Detector	Delta Limit/dB
1	34.480000000 MHz	22.06	Quasi Peak	-7.94
1	43.680000000 MHz	20.39	Quasi Peak	-9.61
1	52.280000000 MHz	23.98	Quasi Peak	-6.02
1	62.720000000 MHz	29.16	Quasi Peak	-0.84
1	64.680000000 MHz	28.01	Quasi Peak	-1.99
1	79.520000000 MHz	18.03	Quasi Peak	-11.97
1	114.520000000 MHz	24.42	Quasi Peak	-9.10
1	129.960000000 MHz	28.71	Quasi Peak	-4.81
1	140.680000000 MHz	21.78	Quasi Peak	-11.74
1	198.560000000 MHz	15.38	Quasi Peak	-18.14
1	328.480000000 MHz	14.24	Quasi Peak	-21.78
1	535.600000000 MHz	18.30	Quasi Peak	-17.72
1	942.360000000 MHz	24.18	Quasi Peak	-11.84



G15140714

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Gandini 15140714
Test Spec
Horiz

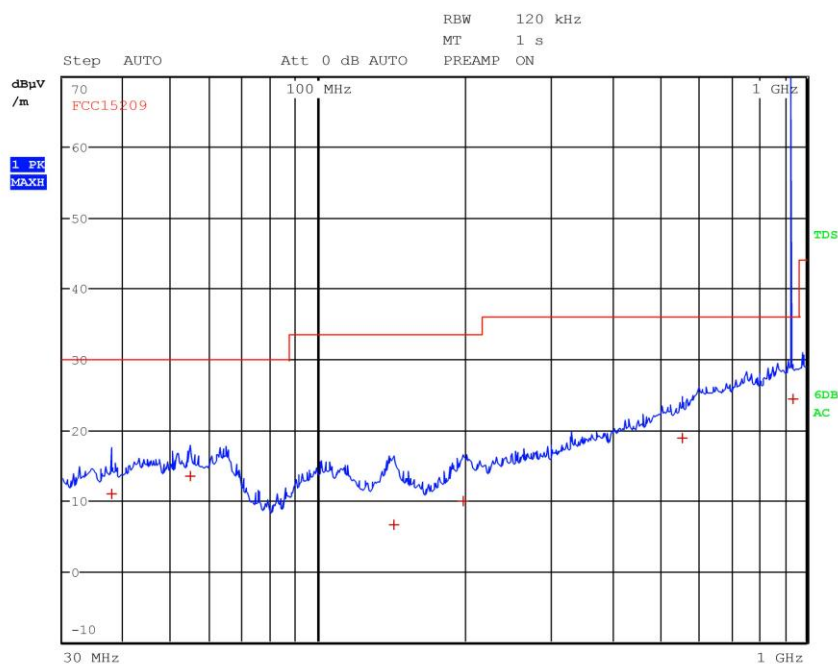


Final Measurement

Meas Time: 1 s
Margin: 20 dB
Subranges: 6

Trace	Frequency	Level (dBμV/m)	Detector	Delta Limit/dB
1	37.720000000 MHz	10.98	Quasi Peak	-19.02
1	54.800000000 MHz	13.44	Quasi Peak	-16.56
1	143.000000000 MHz	6.52	Quasi Peak	-27.00
1	198.320000000 MHz	10.00	Quasi Peak	-23.52
1	557.040000000 MHz	18.75	Quasi Peak	-17.27
1	939.640000000 MHz	24.30	Quasi Peak	-11.72



G15140727

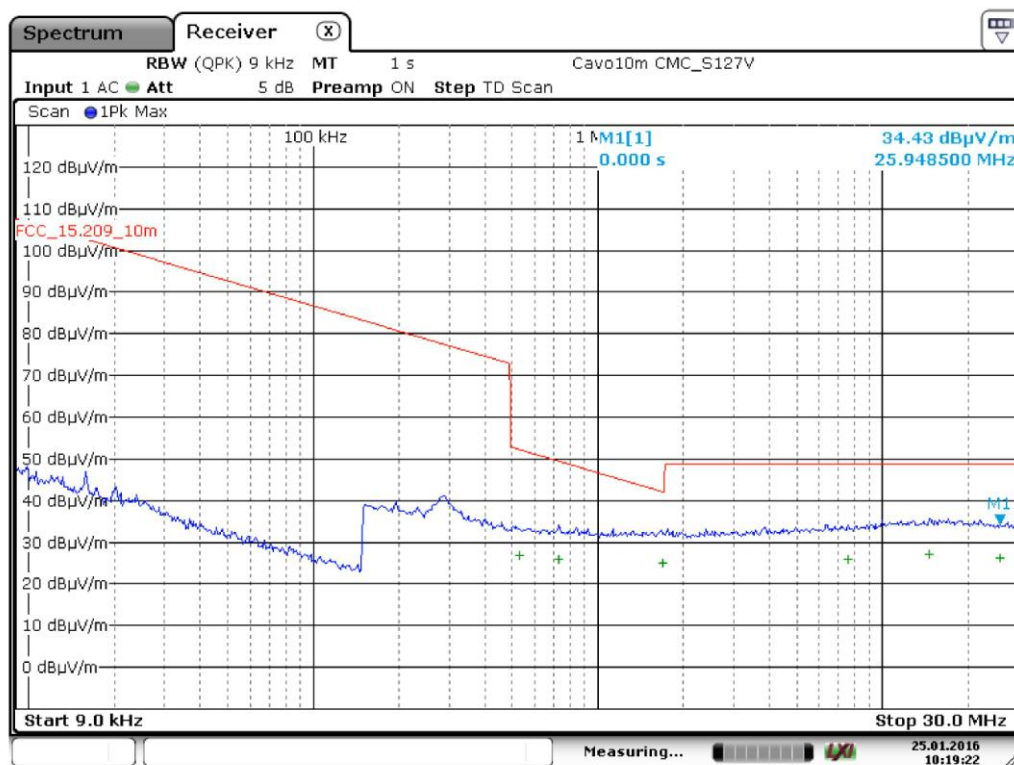


Bertezzo 15140727

Trace/Detector	Frequency	Level dBμV/m	DeltaLimit
1 Quasi Peak	530.2500 kHz	26.83	-25.36 dB
1 Quasi Peak	728.2500 kHz	26.06	-23.38 dB
1 Quasi Peak	1.6913 MHz	24.94	-17.18 dB
1 Quasi Peak	7.5503 MHz	25.97	-22.65 dB
1 Quasi Peak	14.6535 MHz	27.06	-21.56 dB
1 Quasi Peak	25.9485 MHz	26.26	-22.36 dB



G15140750

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Bertezzo 15140750
Test Spec

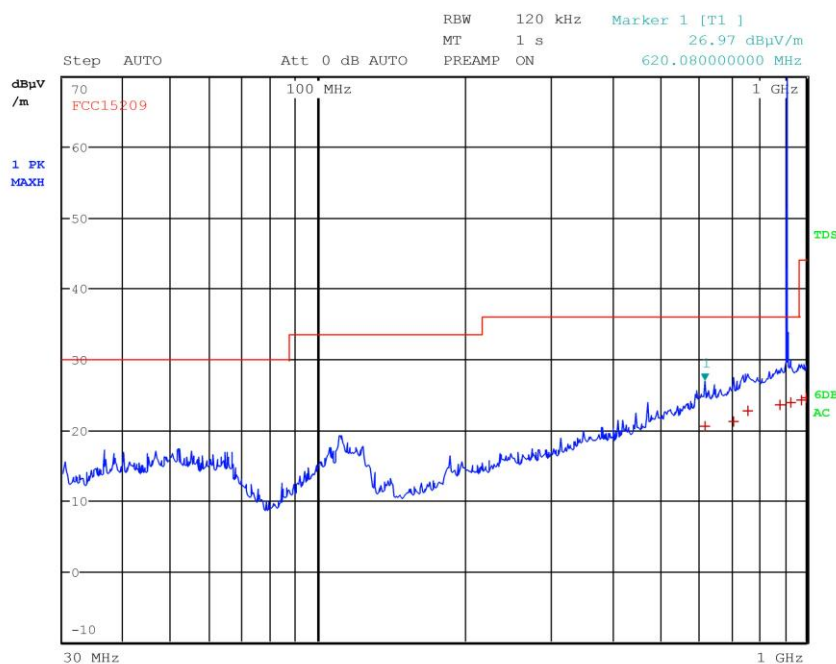

Final Measurement


Meas Time: 1 s
Margin: 20 dB
Subranges: 7

Trace	Frequency	Level (dBμV/m)	Detector	Delta Limit/dB
1	620.08000000 MHz	20.49	Quasi Peak	-15.53
1	711.52000000 MHz	21.21	Quasi Peak	-14.81
1	757.92000000 MHz	22.76	Quasi Peak	-13.26
1	884.80000000 MHz	23.60	Quasi Peak	-12.42
1	929.48000000 MHz	23.82	Quasi Peak	-12.20
1	977.72000000 MHz	24.21	Quasi Peak	-19.77
1	999.36000000 MHz	24.56	Quasi Peak	-19.42



G15140751

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Bertezzo 15140751
Test Spec

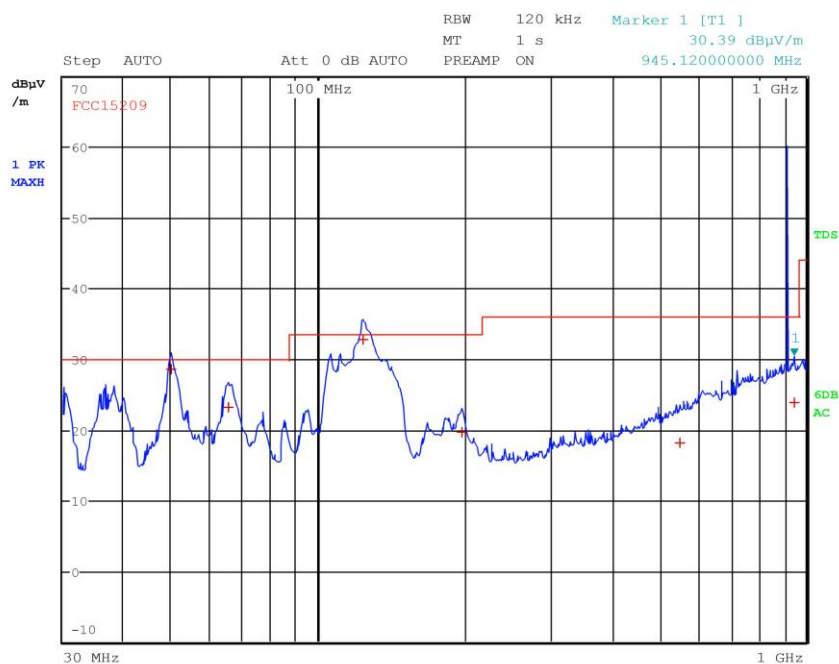

Final Measurement


Meas Time: 1 s
Margin: 20 dB
Subranges: 6

Trace	Frequency	Level (dBμV/m)	Detector	Delta Limit/dB
1	50.040000000 MHz	28.52	Quasi Peak	-1.48
1	65.560000000 MHz	23.27	Quasi Peak	-6.73
1	123.520000000 MHz	32.84	Quasi Peak	-0.68
1	197.240000000 MHz	19.67	Quasi Peak	-13.85
1	551.400000000 MHz	18.22	Quasi Peak	-17.80
1	945.120000000 MHz	23.80	Quasi Peak	-12.22



G15140752

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Bertezolo 15140752
Test Spec

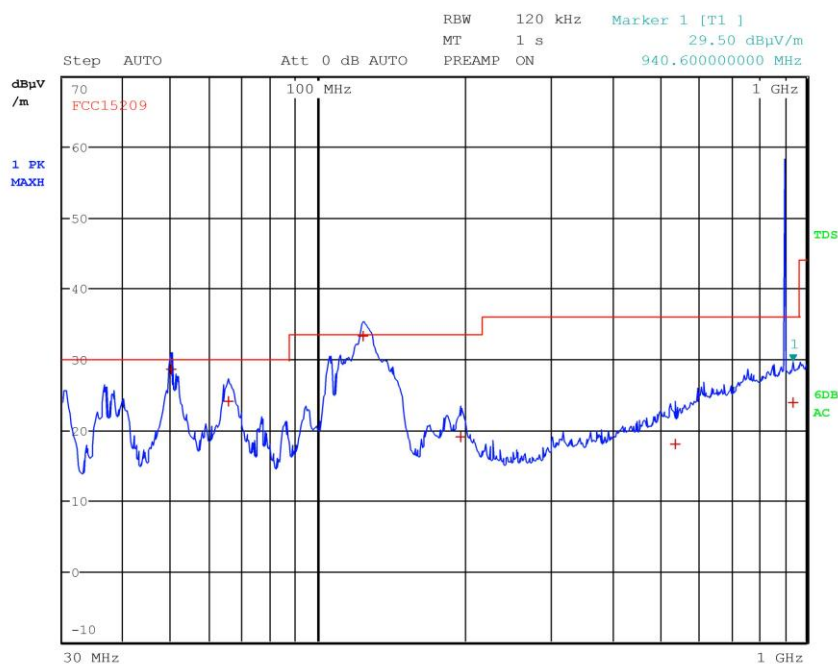

Final Measurement


Meas Time: 1 s
Margin: 20 dB
Subranges: 6

Trace	Frequency	Level (dBμV/m)	Detector	Delta Limit/dB
1	50.080000000 MHz	28.56	Quasi Peak	-1.44
1	65.520000000 MHz	24.04	Quasi Peak	-5.96
1	123.920000000 MHz	33.25	Quasi Peak	-0.27
1	195.600000000 MHz	19.06	Quasi Peak	-14.46
1	539.200000000 MHz	17.97	Quasi Peak	-18.05
1	940.600000000 MHz	23.91	Quasi Peak	-12.11



G15140753

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Bertezzo 15140753
Test Spec

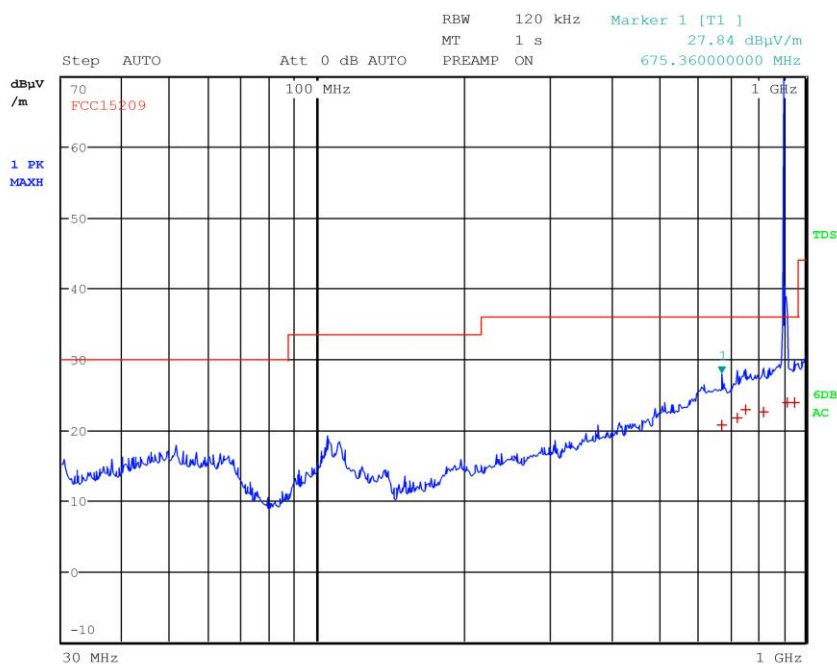

Final Measurement


Meas Time: 1 s
Margin: 20 dB
Subranges: 6

Trace	Frequency	Level (dBμV/m)	Detector	Delta Limit/dB
1	675.360000000 MHz	20.69	Quasi Peak	-15.33
1	726.560000000 MHz	21.75	Quasi Peak	-14.27
1	755.400000000 MHz	22.81	Quasi Peak	-13.21
1	821.760000000 MHz	22.50	Quasi Peak	-13.52
1	921.200000000 MHz	23.80	Quasi Peak	-12.22
1	950.520000000 MHz	23.85	Quasi Peak	-12.17



G15140754

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Bertezzo 15140754
Test Spec

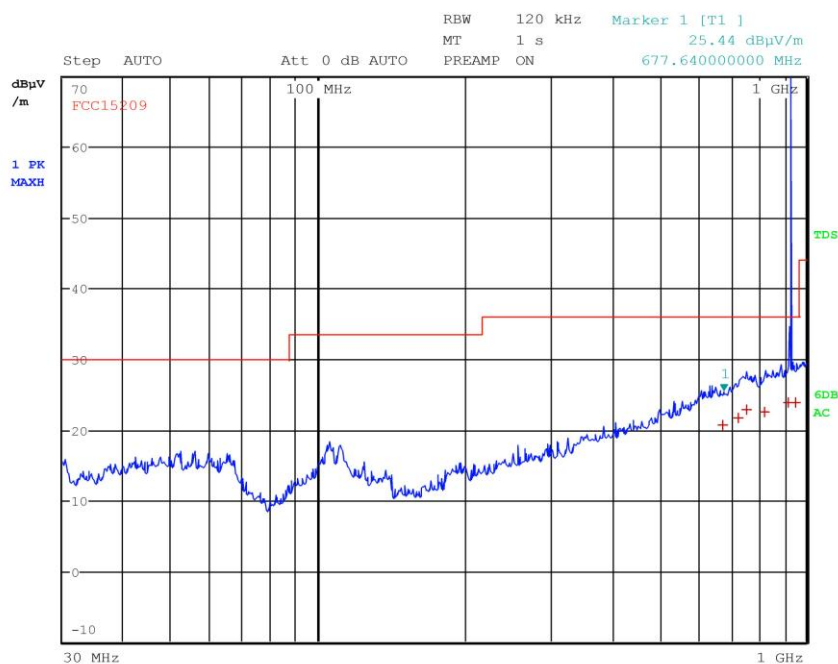

Final Measurement


Meas Time: 1 s
Margin: 20 dB
Subranges: 6

Trace	Frequency	Level (dBμV/m)	Detector	Delta Limit/dB
1	675.360000000 MHz	20.69	Quasi Peak	-15.33
1	726.560000000 MHz	21.74	Quasi Peak	-14.28
1	755.400000000 MHz	22.84	Quasi Peak	-13.18
1	821.760000000 MHz	22.51	Quasi Peak	-13.51
1	921.200000000 MHz	23.85	Quasi Peak	-12.17
1	950.520000000 MHz	23.92	Quasi Peak	-12.10



G15140755

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Bertezzo 15140755
Test Spec

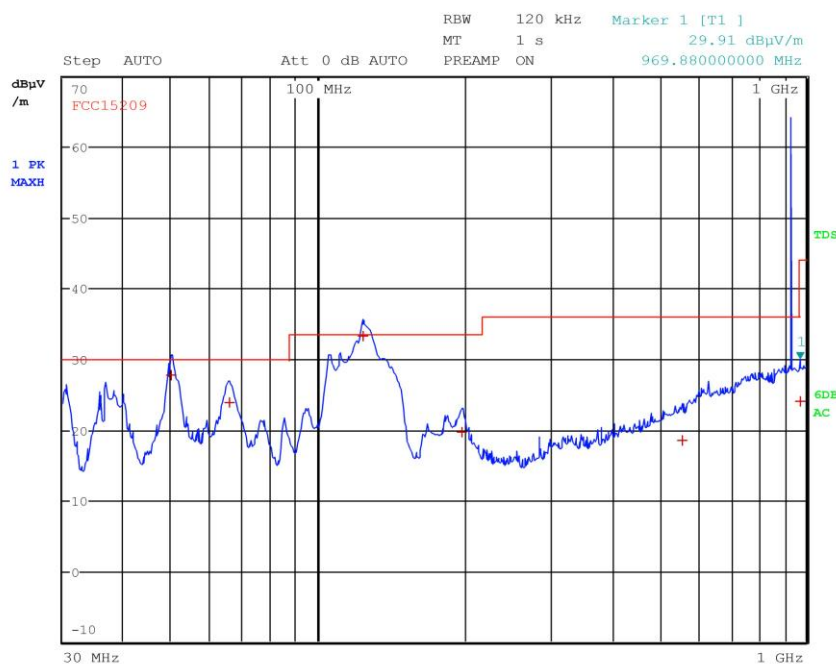

Final Measurement


Meas Time: 1 s
Margin: 20 dB
Subranges: 6

Trace	Frequency	Level (dBμV/m)	Detector	Delta Limit/dB
1	49.960000000 MHz	27.79	Quasi Peak	-2.21
1	65.880000000 MHz	23.87	Quasi Peak	-6.13
1	123.680000000 MHz	33.24	Quasi Peak	-0.28
1	196.640000000 MHz	19.74	Quasi Peak	-13.78
1	557.280000000 MHz	18.45	Quasi Peak	-17.57
1	969.880000000 MHz	24.06	Quasi Peak	-19.92



G15140756

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Bertezolo 15140756
Test Spec

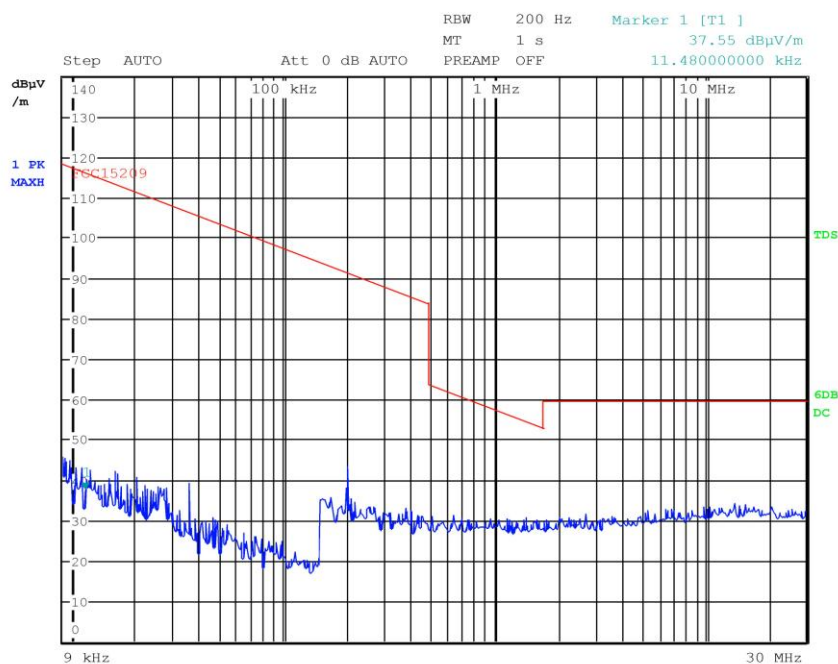


Final Measurement

Meas Time: 1 s
Margin: 20 dB
Subranges: 0



G15140757

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Bertezolo 15140757
Test Spec

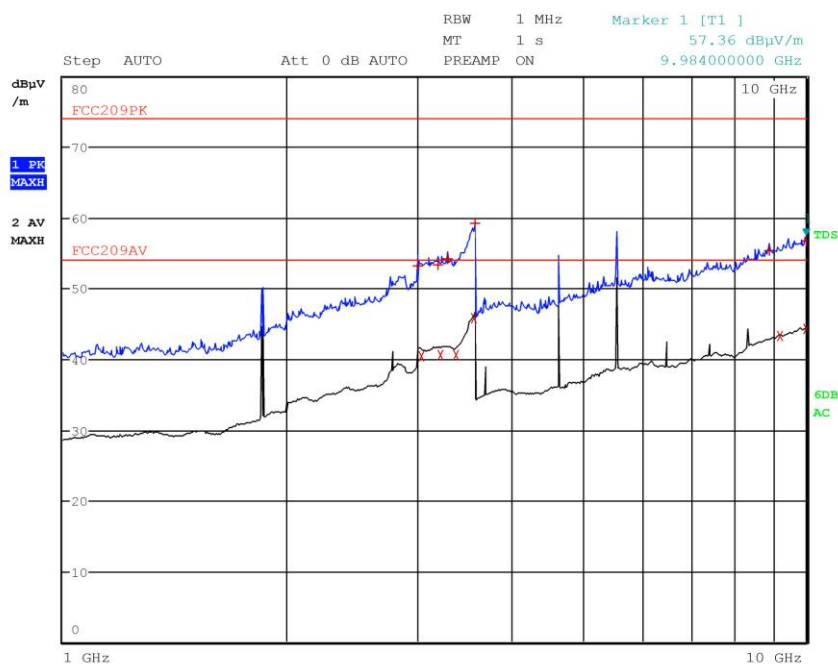



Meas Type Emission
Equipment under Test
Manufacturer
OP Condition
Operator Bertezolo 15140757
Test Spec

Final Measurement

Meas Time: 1 s
Margin: 20 dB
Subranges: 12

Trace	Frequency	Level (dBµV/m)	Detector	Delta Limit/dB
1	3.002000000 GHz	53.13	Max Peak	-20.87
2	3.034800000 GHz	40.35	Average	-13.65
1	3.200800000 GHz	53.40	Max Peak	-20.60
2	3.221600000 GHz	40.56	Average	-13.44
1	3.288400000 GHz	54.12	Max Peak	-19.88
2	3.384000000 GHz	40.55	Average	-13.45
2	3.575600000 GHz	45.80	Average	-8.20
1	3.587200000 GHz	59.31	Max Peak	-14.69
1	8.905600000 GHz	55.34	Max Peak	-18.66
2	9.207200000 GHz	43.19	Average	-10.81
1	9.984000000 GHz	56.68	Max Peak	-17.32
2	9.988800000 GHz	44.24	Average	-9.76