

Straubing, 12 September 2003

TEST - REPORT

No. 58002-30555-1

for

CELSIUS

Remote Controller, Portable Unit

Applicant: A. J. Fonseca Lda

Test Specification: FCC Code of Federal Regulations,
CFR 47, Part 15,
Sections 15.209 and 15.249

Note:

The test data of this report relate only to the individual item which has been tested. This report shall not be reproduced except in full extent without the written approval of the testing laboratory.

Table of Contents

1.	Administrative Data.....	3
2.	Identification of Test Laboratory.....	4
3.	Summary.....	5
4.	Operation Mode and Configuration of EUT.....	6
5.	Measuring Methods	7
5.1.	Field Strength of Emissions, Prescans in a fully-anechoic Room.....	7
5.2.	Radiated Emission Measurement at Open Area Test Site	9
6.	Photographs Taken During Testing	10
7.	List of Measurements.....	13
8.	Referenced Regulations	16
	Charts taken during testing.....	17

1. Administrative Data

Test item (EUT)	
Type designation	CELSIUS
Version of EUT:	
Serial number(s):	MB
Type of equipment:	Remote Controller
Parts/accessories:	---
FCC-ID:	
Technical data	
Frequency range:	902 - 928 MHz
Operational frequencies:	---
Type of modulation:	FM
Pulse frequency:	N/A
Pulse width:	N/A
Class of emission:	140K0F3D
Antenna:	Integrated
Power supply:	2 x 1.5 V Alakaline Batteries
Applicant: (full address)	A.J. Fonseca Lda Rua Herois de Mucaba, 32 4470-056 Gueifães Portugal
Contract identification:	Verbal
Contact person:	Mr. Leal Duarte
Manufacturer:	Applicant
Application details	
Receipt of EUT:	25 August 2003
Date of test:	01 September 2003
Note:	

2. Identification of Test Laboratory

Details of the Test Laboratory	
Company name:	Senton GmbH EMI/EMC Test Center
Address:	Aeussere Fruehlingstrasse 45 D-94315 Straubing Germany
Laboratory Accreditation:	DAR-Registration No. TTI-P-G 062/94-01
FCC Test Site registration number	90926
Industry Canada Test site registration:	IC 3050
Name for contact purposes:	Mr. Johann Roidt
	Phone: (+49) (0)9421 5522-0 Fax: (+49) (0)9421 5522-99

3. Summary

Summary of test results
The tested sample complies with the requirements set forth in the Code of Regulations CFR 47, Part 15, Sections 15.207, 15.209 and 15.249 of the Federal Communication Commission (FCC) and the Radio Standards Specification RSS-210 Issue 5, Section 7 (Category I Receiver) of Industry Canada (IC).

Personnel involved in this report	
Laboratory Manager:	 Mr. Johann Roidt
Responsible for testing:	Mr. Johann Roidt
Responsible for test report:	Mr. Johann Roidt

4. Operation Mode and Configuration of EUT

Operation Mode
1) Continuous TX

Configuration of EUT
Not applicable

List of ports and cables				
Port	Description	Classification ¹	Cable type	Cable length
	No ports			

List of devices connected to EUT				
Item	Description	Type Designation	Serial no. or ID	Manufacturer
	Not applicable			

¹ Ports shall be classified as ac power, dc power or signal/control port

5. Measuring Methods

5.1. Field Strength of Emissions, Prescans in a fully-anechoic Room


Rules and Specifications:	Sections 15.109, 15.209, 15.245
Guide:	ANSI C63.4 1997

Measurement Procedure:

Radiated emissions are measured over the frequency range from 30 MHz to maximum frequency as specified in section 15.33.

Measurements are made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 100 kHz (below 1 GHz) or 1 MHz (above 1 GHz).

All tests are performed at a test-distance of 3 meters. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing. During the tests the EUT is rotated all around to find the maximum levels of emissions. The cables and equipment were placed and moved within the range of position likely to find their maximum emissions.

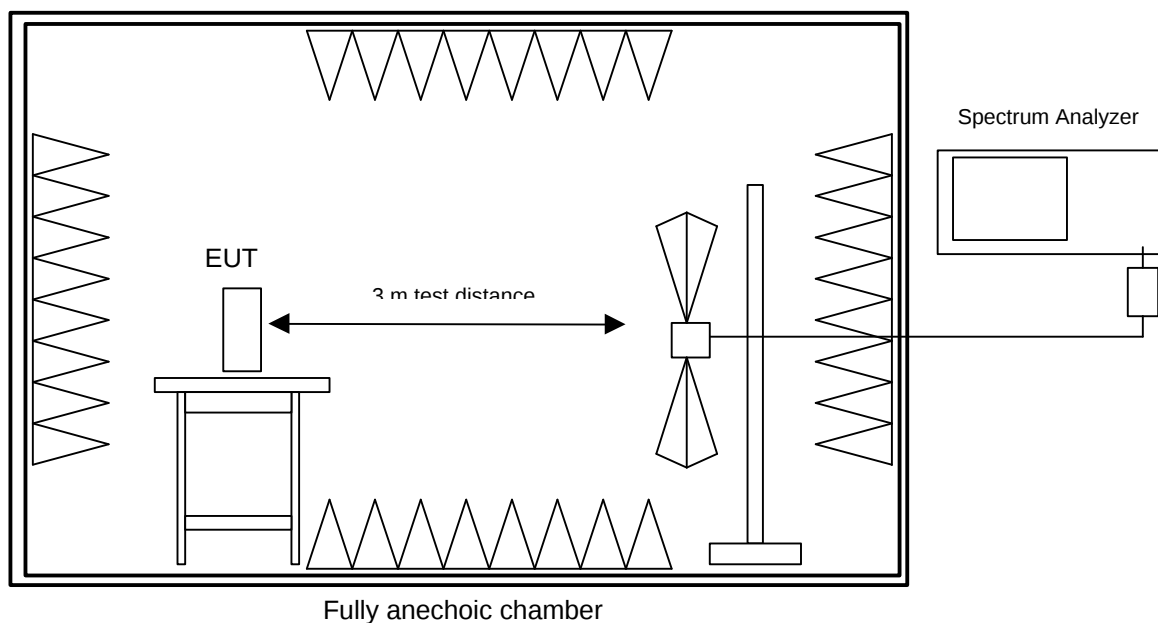

Test instruments used:


No.	Type	Model	Serial Number	Manufacturer
01	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
02	Preamplifier	CPA9231A	3393	Schaffner
03	Biconical antenna	HK 116	829708/006	Rohde & Schwarz
04	Log. periodic antenna	3147	9112-1054	EMCO
05	Horn antenna	3115	9508-4553	EMCO
06	Horn antenna	3160-03	9112-1003	Emco
07	Horn antenna	3160-04	9112-1001	Emco
08	Horn antenna	3160-05	9112-1001	Emco
09	Horn antenna	3160-06	9112-1001	Emco
10	Horn antenna	3160-07	9112-1008	Emco
11	Horn antenna	3160-08	9112-1002	Emco
12	Horn antenna	3160-09	9403-1025	Emco
13	Preamplifier 1-8 GHz	AFS3-00100800-32-LN	847743	Miteq
14	Preamplifier 8-18 GHz	ACO/180-3530	32641	CTT
15	Fully anechoic room	No. 2	1452	Albatross Projects

5.2. Radiated Emission Measurement at Open Area Test Site

Rules and Specifications:	Sections 15.109, 15.209, 15.245
Guide:	ANSI C63.4 1997

Measurement Procedure:

Radiated emissions are measured in the frequency range 30 MHz to 1 GHz
The measurement bandwidth of the test receiver is set to 120 kHz with detector set to quasi-peak.
Hand-held or body-worn devices are tested in the position producing the highest emission relative to the limit as verified by prescans in the fully-anechoic room.
EUT is rotated all around and receiving antenna is raised and lowered to find the maximum levels of emission. The cables and equipment are placed and moved within the range of position likely to find their maximum emissions.
In general a test-distance of 3 meters is selected. If a test-distance of 10 meters is used the limits are calculated according to 15.31 (d) and (f)(1).
If required preamplifiers are used for the whole frequency range. Special care is taken to avoid overload in transmit mode (using appropriate attenuators and filters if necessary).

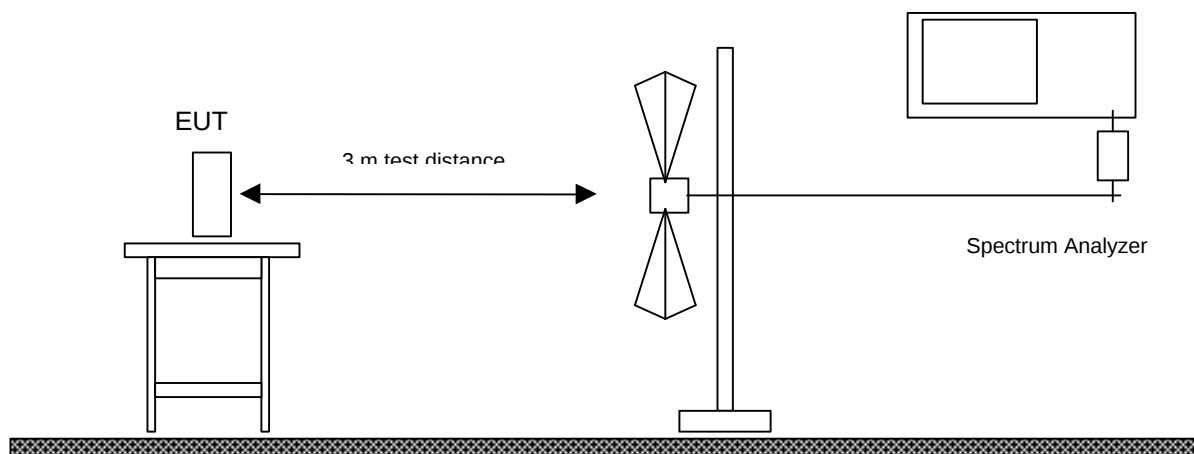

Test instruments used:

No.	Type	Model	Serial Number	Manufacturer
01	EMI Receiver	ESVP	881414/009	Rohde & Schwarz
141	Biconical antenna	HK 116	829708/006	Rohde & Schwarz
143	Log. periodic antenna	3147	9112-1054	EMCO
145	Horn antenna	3115	9508-4553	EMCO
146	Horn antenna set	3160-03/-09	9112-1003	EMCO
114	Preamplifier 1-8 GHz	AFS3-00100800-32-LN	847743	Miteq
115	Preamplifier 8-18 GHz	ACO/180-3530	32641	CTT
003	Open Field Test Site	No. 1	N/A	Senton

6. Photographs Taken During Testing

Test setup for radiated emission measurement (fully anechoic room)





7. List of Measurements

FCC Part 15			
Section(s):	Test	Page(s)	Result
15.205 15.207 15.249 (a) 15.249 (d)			
	Restricted Bands		Pass
	AC Powerline Emissions	---	Not applicable
	Field Strength of Emissions (Fundamental & Harmonics)	14	Pass
	Radiated Spurious Emissions	15	Pass

IC RSS-210 Issue 5			
Section(s):	Test	Page(s)	Result
6.6	Transmitter AC Wireline Conducted Emissions	---	Not applicable
6.2.2 (m2) (1)	Field Strength of Emissions Fundamental & Harmonics	14	Passed
6.2.2. (m2) (3)	Radiated Spurious Emissions (except Fundamental & Harmonics)	15	Passed

Field Strength of Emissions

Rules and Specifications:	15.209, 15.249 (a) Radiated Emission Limits		
Guide:	ANSI C63.4		
Limit:	The field strength of emissions from intentional radiators operated in these frequency band shall comply with the following:		
	Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
	902-928 MHz	50	500
	2400-2483.5 MHz	50	500
	5725-5875 MHz	50	500
	24-24.25 GHz	250	2500

Tested Frequency:	
Test Site:	Open Area Test Site (< 1 GHz), Fully anechoic chamber (> 1 GHz)
Distance:	3 Meter

Frequency (MHz)	Detector	Antenna Polarization	Analyzer Reading (dBμV)	Correction Factor (dB/m)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
903.144	Q.P	Hor	57	35.12	92.12	94.00	1.9
1806.300	Pk	Hor	11.99	30.01	42	54.00	12.0
2711.000	Pk	Hor	11.58	33.09	44.67	54.00	9.3
4516.200	PK	Hor	14.62	31.86	46.48	54.00	7.5

*** = All emissions showed more than 20 dB margin to the limit

Sample calculation of erp values:

Field Strength (dBμV/m) = Analyzer Reading (dBμV) + Correction Factor (dB/m)

Test Results:	Pass
---------------	------

Spurious Radiation Measurement

Rules and Specifications:	15.209, 15.249 (d) Radiated Emission Limits	
Guide:	ANSI C63.4	
Limit:	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated at least 50 dB below the level of the fundamental or to the general radiated emission limits below, whichever is the lesser attenuation	
	Frequency of Emission (MHz)	Field Strength (microvolts/meter)
	30 - 88	100
	88 - 216	150
	216 - 960	200
	Above 960	500

Tested Frequency:	
Test Site:	Open Area Test Site (< 1 GHz), Fully anechoic chamber (> 1 GHz)
Distance:	3 Meter

Frequency (MHz)	Detector	Antenna Polarization	Analyzer Reading (dBμV)	Correction Factor (dB/m)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30-12400	QP/Pk	Hor/Ver	***				

*** = All emissions showed more than 20 dB margin to the limit

Sample calculation of erp values:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{Analyzer Reading (dB}\mu\text{V)} + \text{Correction Factor (dB/m)}$$

Test Results:	Pass	
---------------	------	--

8. Referenced Regulations

All tests were performed with reference to the following regulations and standards:

☒	CFR 47 Part 2	Code of Federal Regulations Part 2 (Frequency Allocations And Radio Treaty Matters, General Rules And Regulations) of the Federal Communication Commission (FCC)	October 1, 2001
☐	CFR 47 Part 15 Subpart A	Code of Federal Regulations Part 15 (Radio Frequency Devices), Subpart A (General) of the Federal Communication Commission (FCC)	March 13, 2003
☐	CFR 47 Part 15 Subpart B	Code of Federal Regulations Part 15 (Radio Frequency Devices), Subpart B (Unintentional Radiators) of the Federal Communication Commission (FCC)	March 13, 2003
☒	CFR 47 Part 15 Subpart C	Code of Federal Regulations Part 15 (Radio Frequency Devices), Subpart C (Intentional Radiators) of the Federal Communication Commission (FCC)	March 13, 2003
☐	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz - 40 GHz	October, 1992
☒	RSS-210	Radio Standards Specification RSS-210 Issue 5 for Low Power Licence-Exempt Radiocommunication Devices of Industry Canada	November 2001
☐	TIA/EIA-603	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	February 1993
☐	TIA/EIA-603-1	Addendum to TIA/EIA-603	March 4, 1998

Charts taken during testing

Radiated Emission Test 902 MHz - 928 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:
CELSIUS Mobil Unit

Serial no.:
US MB

Applicant:
A. J. Fonseca Lda

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Horizontal Polarization

Date of test:
08/16/2003

Operator:
J. Roidt

Test performed:
automatically

File name:
default.emi


Comment:

Detector:
Peak

List of values:
Selected by hand

dB μ V/m

Limit1: FCC Part 15 Transducer: EMCO 3147 (A-1009)

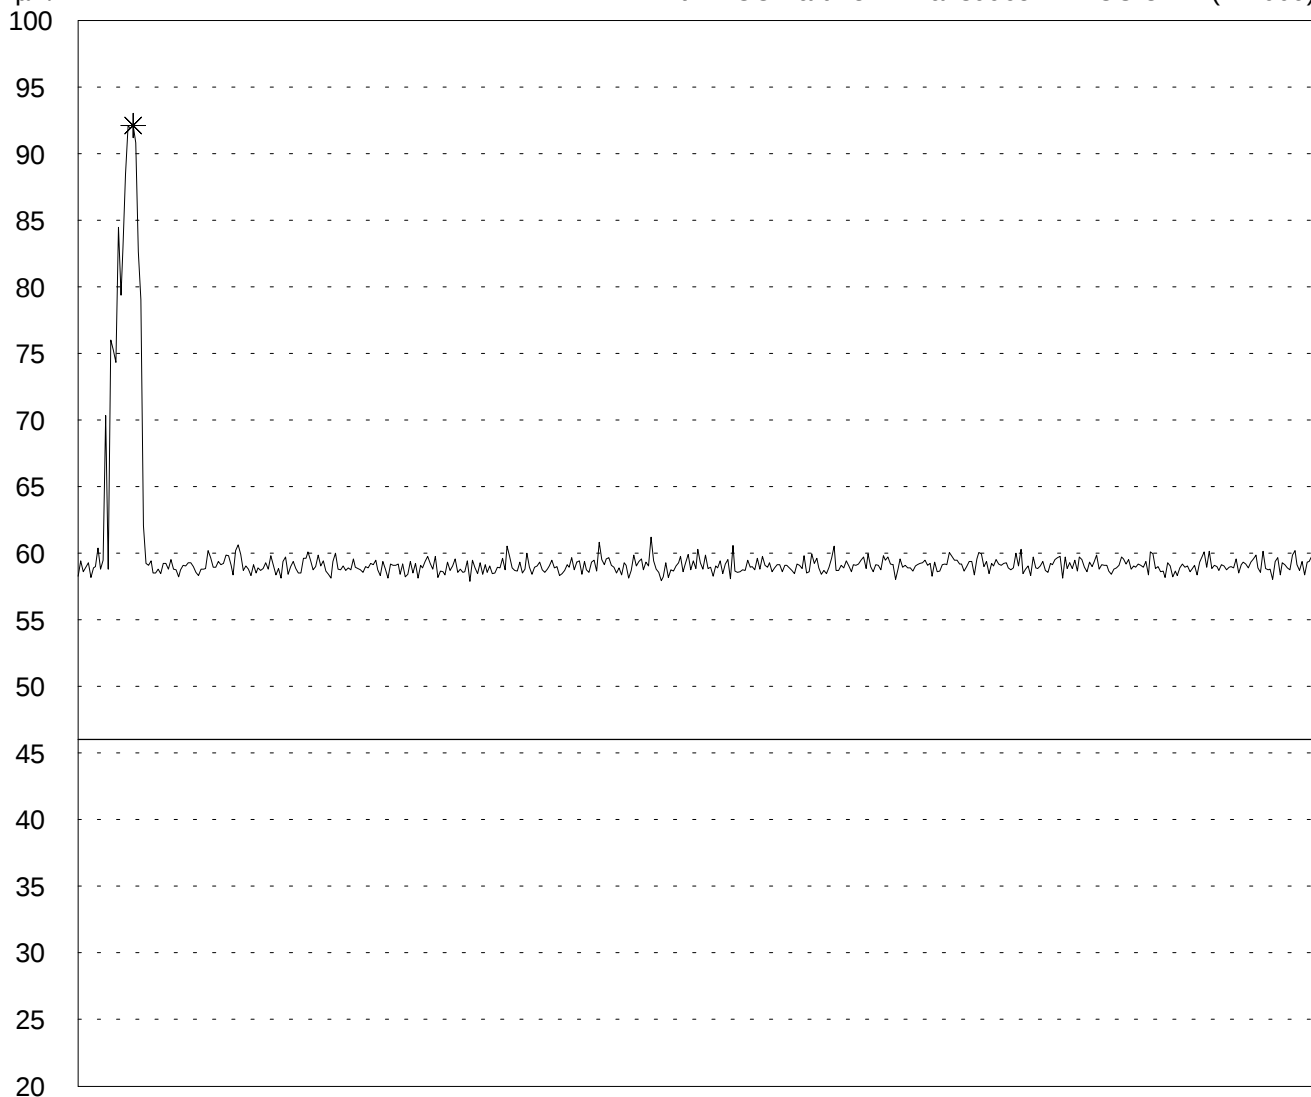

902

928
MHz


Result:
Limit kept

Project file:
58002-30555-2

Page of Pages

Radiated Emission Test 902 MHz - 928 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: CELSIUS Mobil Unit	Comment:	
Serial no.: US MB		
Applicant: A. J. Fonseca Lda		
Test site: Fully anechoic room, cabin no. 2		
Tested on: Test distance 3 metres Vertical Polarization		
Date of test: 08/16/2003		
Operator: J. Roidt		
Test performed: automatically		
File name: default.emi		
Detector: Peak		List of values: Selected by hand

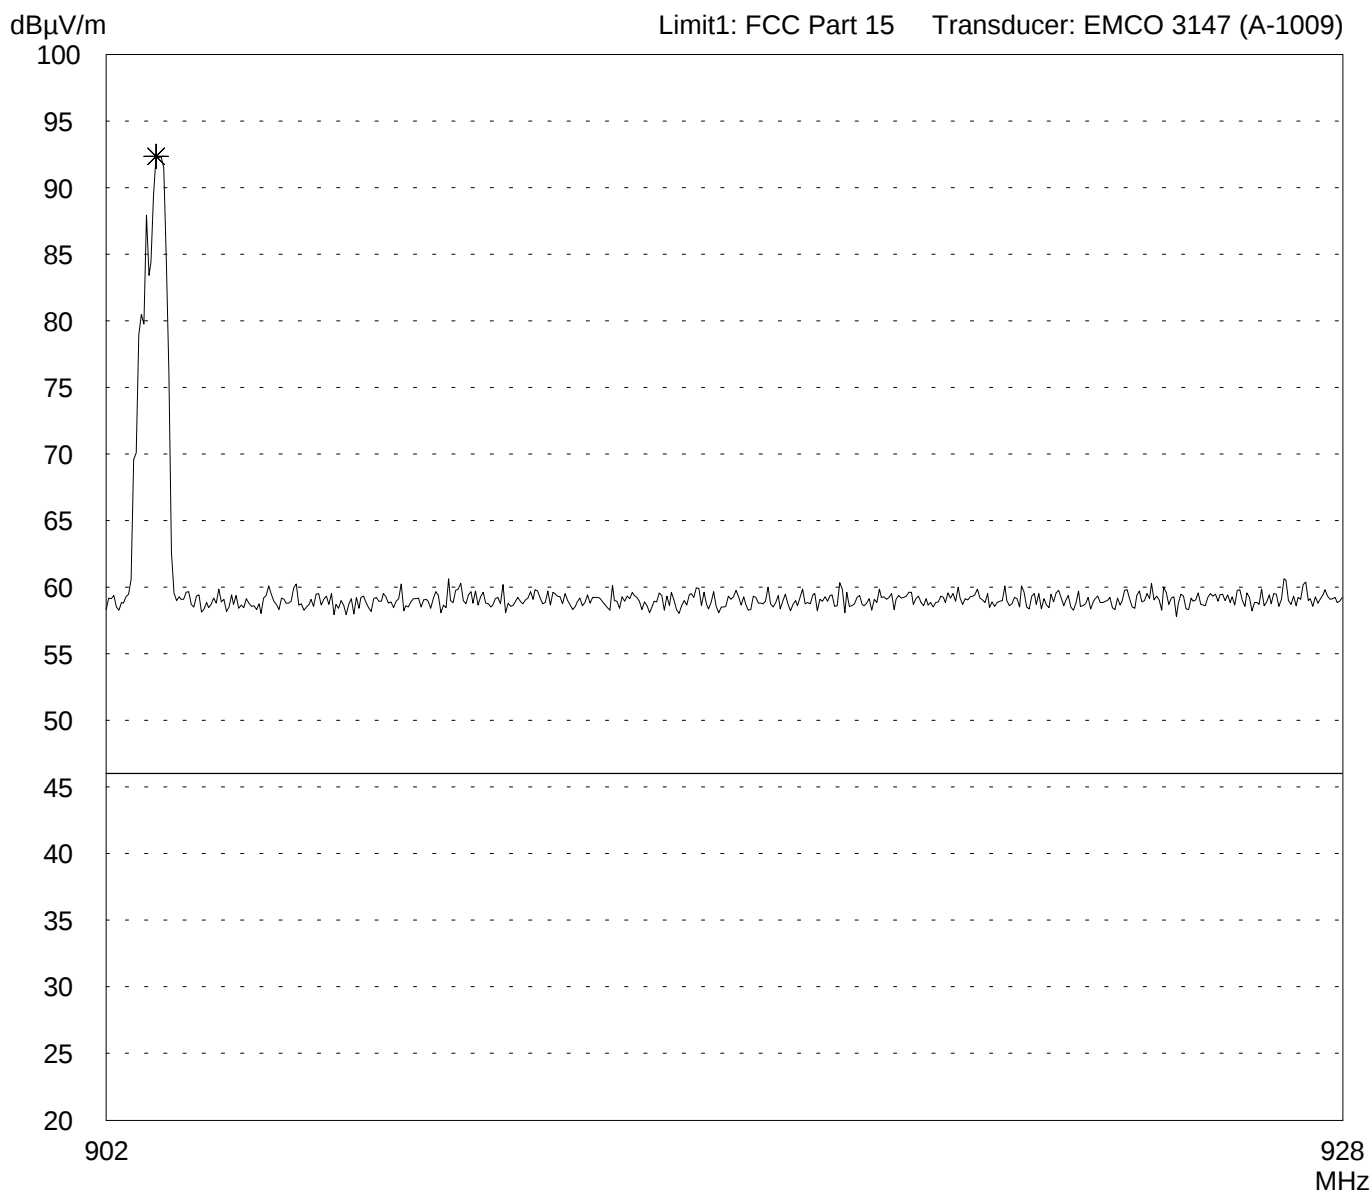

Result: Limit kept	Project file: 58002-30555-2
Page of Pages	

Radiated Emission Test 9 kHz - 30 MHz according to FCC Part 15 Subpart C

Model:
CELSIUS Portable Unit

Serial no.:
MB

Applicant:
A. J. Fonseca Lda

Test site:
Shielded room, cabin no. 2

Tested on:
Test distance 3 metres

Date of test:
02/05/2004

Operator:
J. Roidt

Test performed:
automatically

File name:

Mode:

Detector:
Peak / Final Results: QP


Final results:
20 dB Margin

25 Subranges

dB μ V/m

Limit1: FCC Subpart C

Transducer: HFH2-Z2

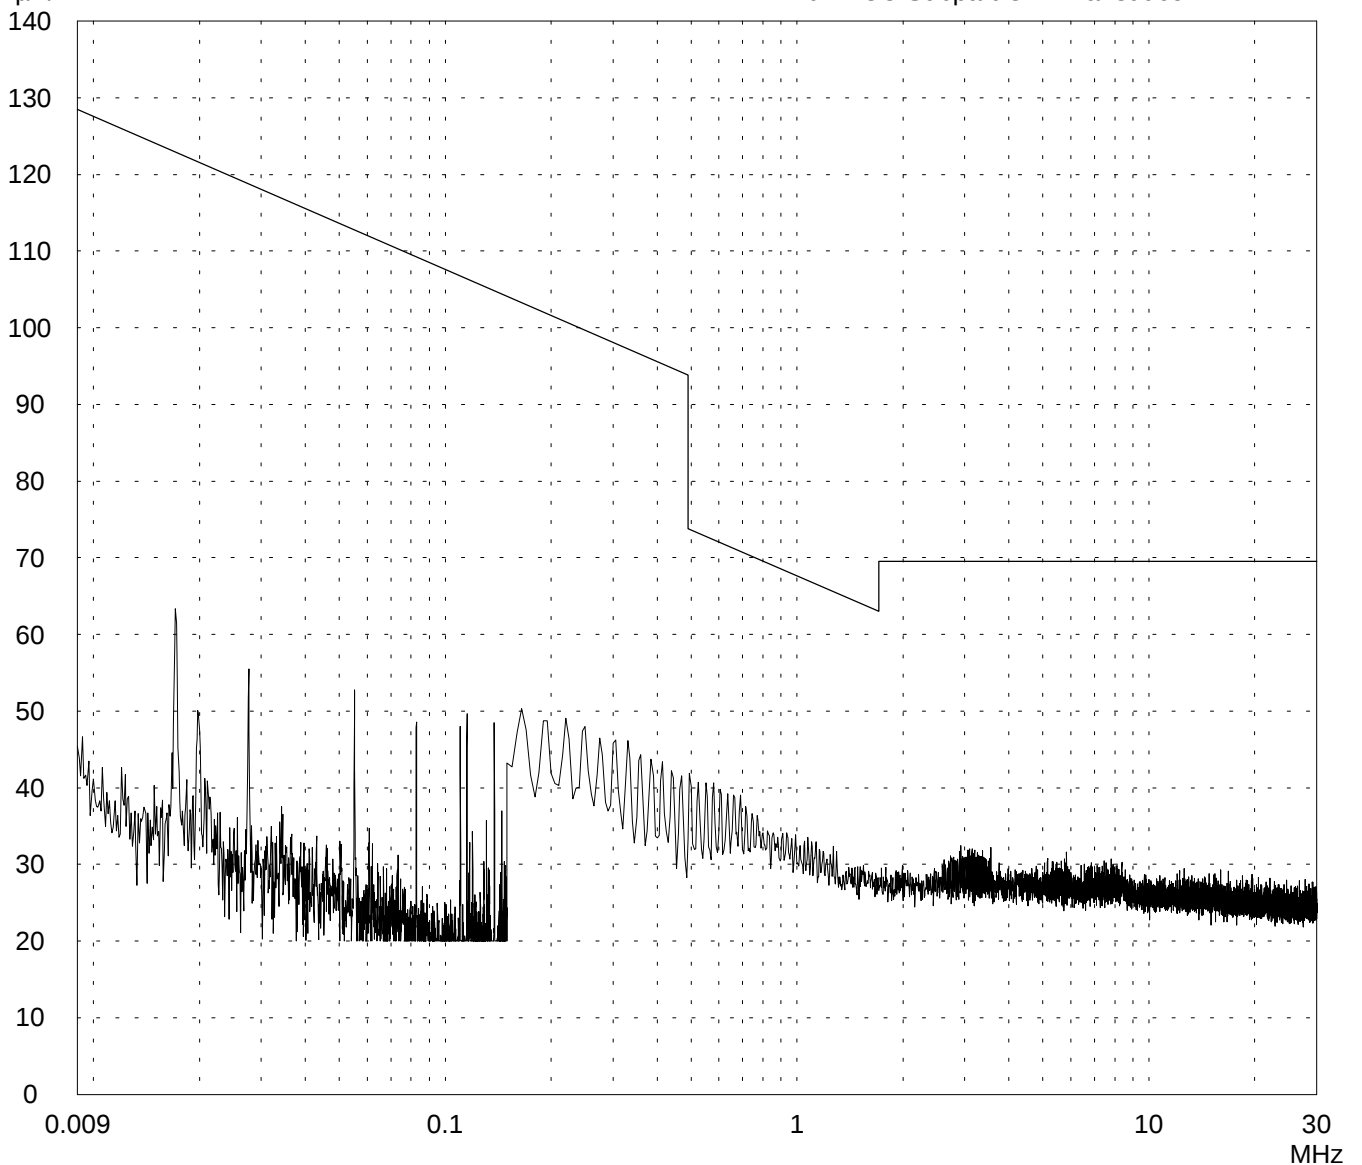

Result:
Limit kept

Project file:
58002-30555-1

Page of Pages

Radiated Emission Test 30 MHz - 300 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:
CELSIUS Mobile Unit

Serial no.:
US MB

Applicant:
A.J. Fonseca Lda

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Horizontal Polarization

Date of test:
August 16, 2003

Operator:
J. Roidt

Test performed:
automatically

File name:
default.emi


Comment:
EUT on long side

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

$\text{dB}\mu\text{V/m}$

Limit1: FCC Part 15 Transducer: HK 116 (A-1560)

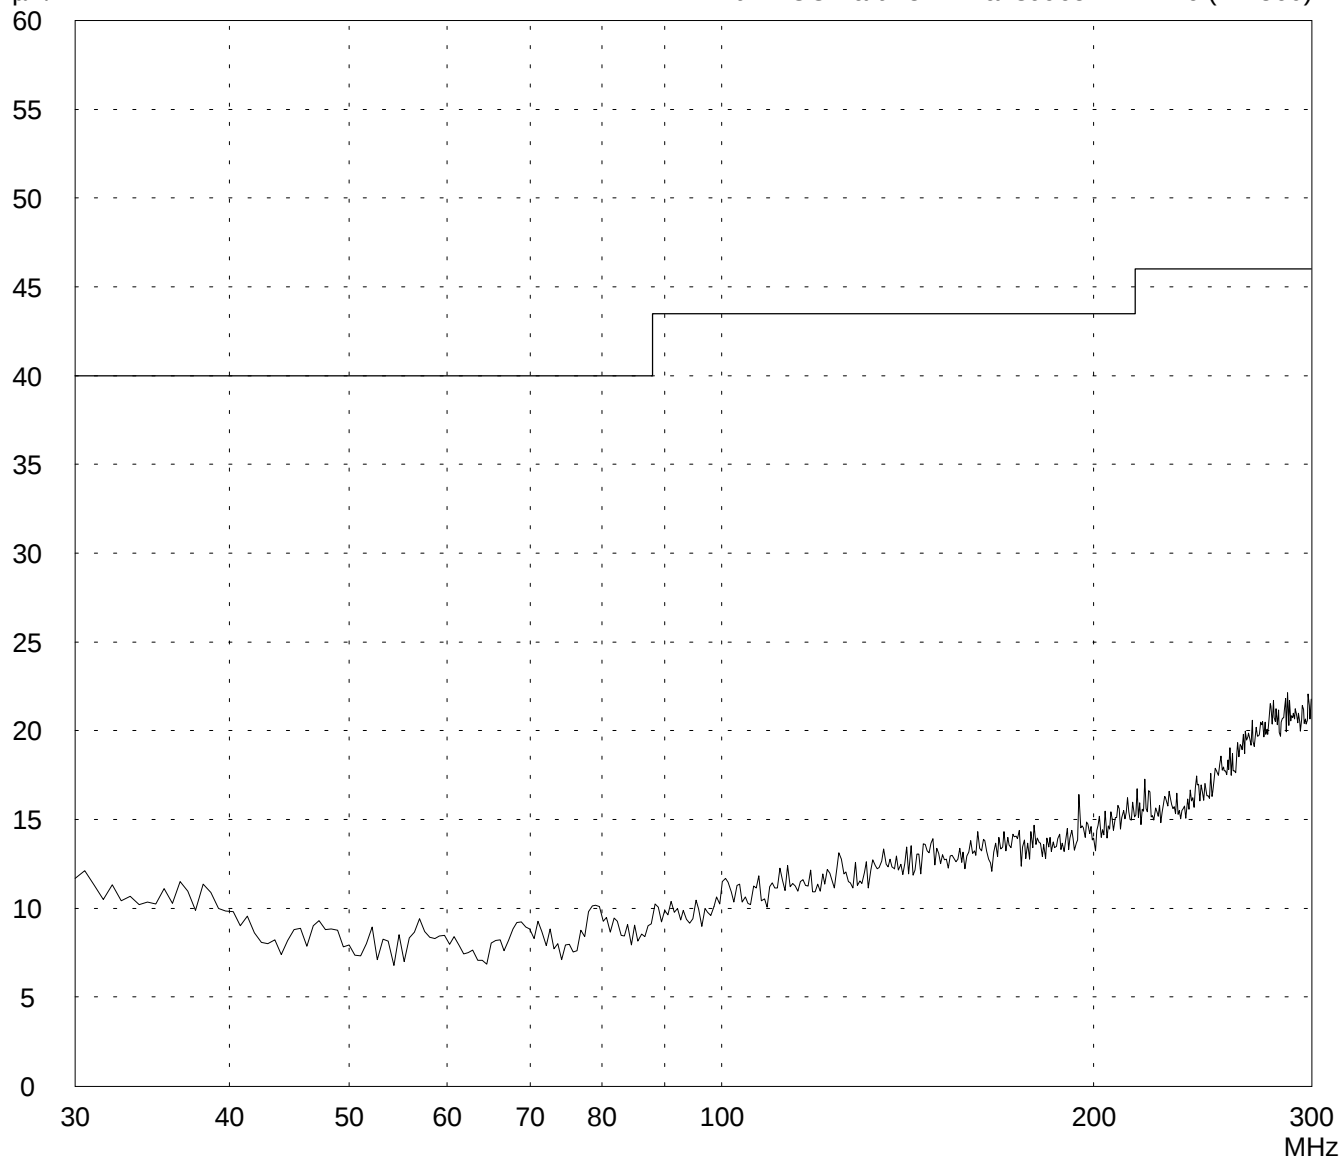

Result:
Prescan

Project file:
58002-30555-2

Page of Pages

Radiated Emission Test 30 MHz - 300 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:
CELSIUS Mobile Unit

Serial no.:
US MB

Applicant:
A.J. Fonseca Lda

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Vertical Polarization

Date of test:
August 16, 2003

Operator:
J. Roidt

Test performed:
automatically

File name:
default.emi


Comment:
EUT flat on table

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

dB μ V/m

Limit1: FCC Part 15 Transducer: HK 116 (A-1560)

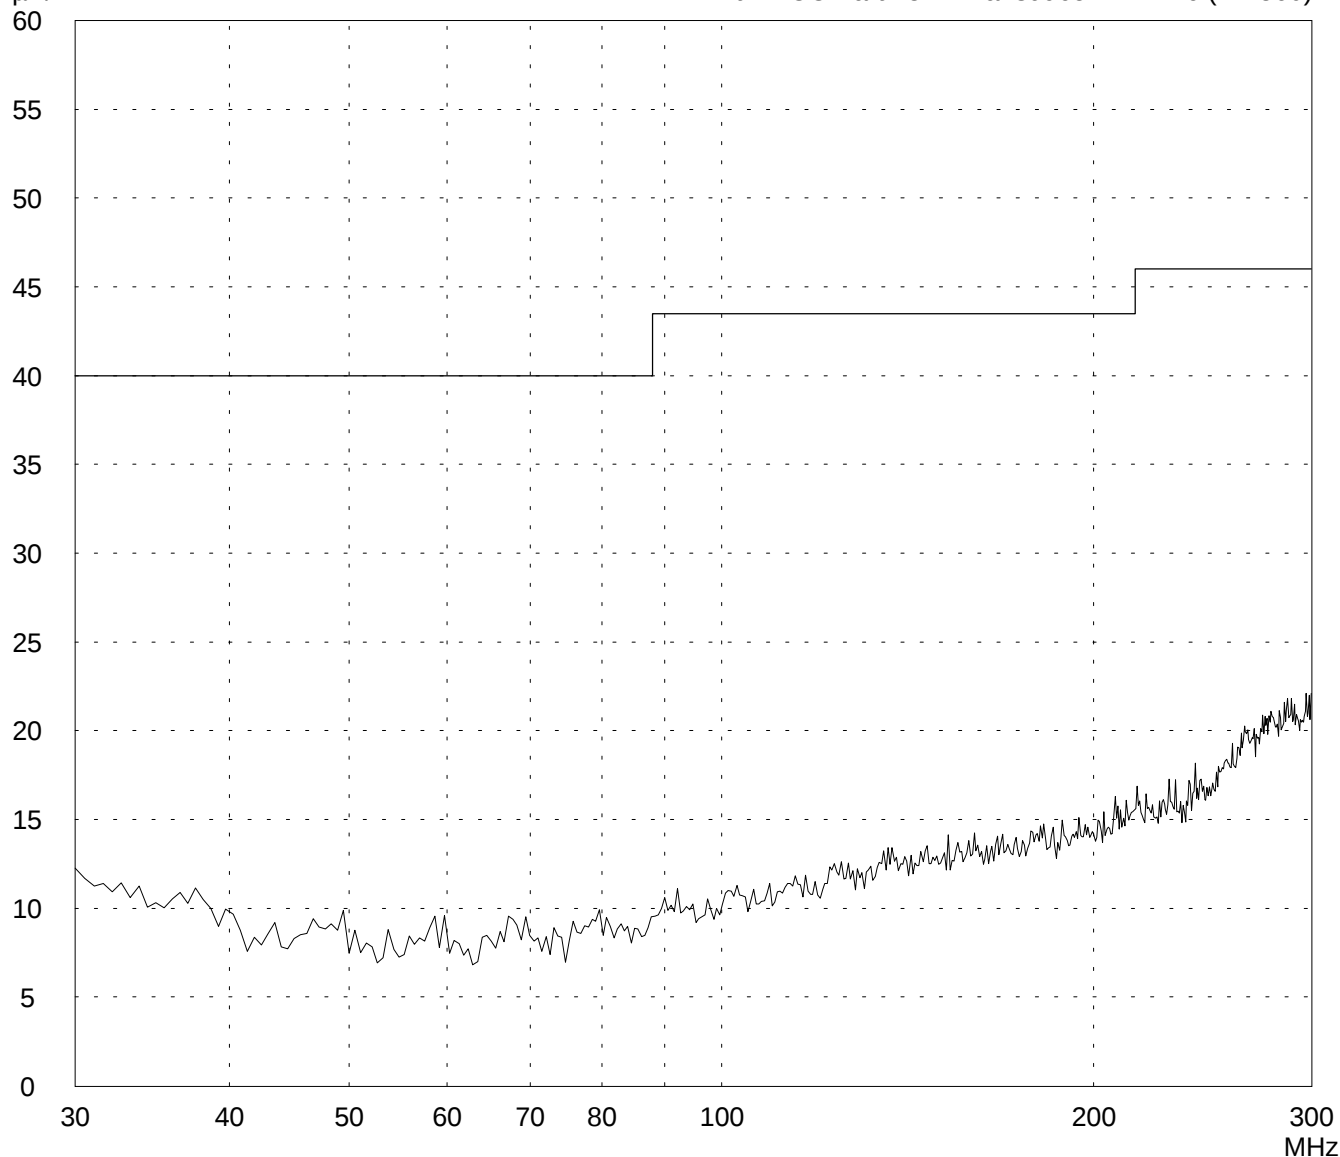

Result:
Prescan

Project file:
58002-30555-2

Page of Pages

Radiated Emission Test 30 MHz - 300 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:
CELSIUS Mobile Unit

Serial no.:
US MB

Applicant:
A.J. Fonseca Lda

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Horizontal Polarization

Date of test:
August 16, 2003

Operator:
J. Roidt

Test performed:
automatically

File name:
default.emi


Comment:
EUT flat on table

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

dB μ V/m

Limit1: FCC Part 15 Transducer: HK 116 (A-1560)

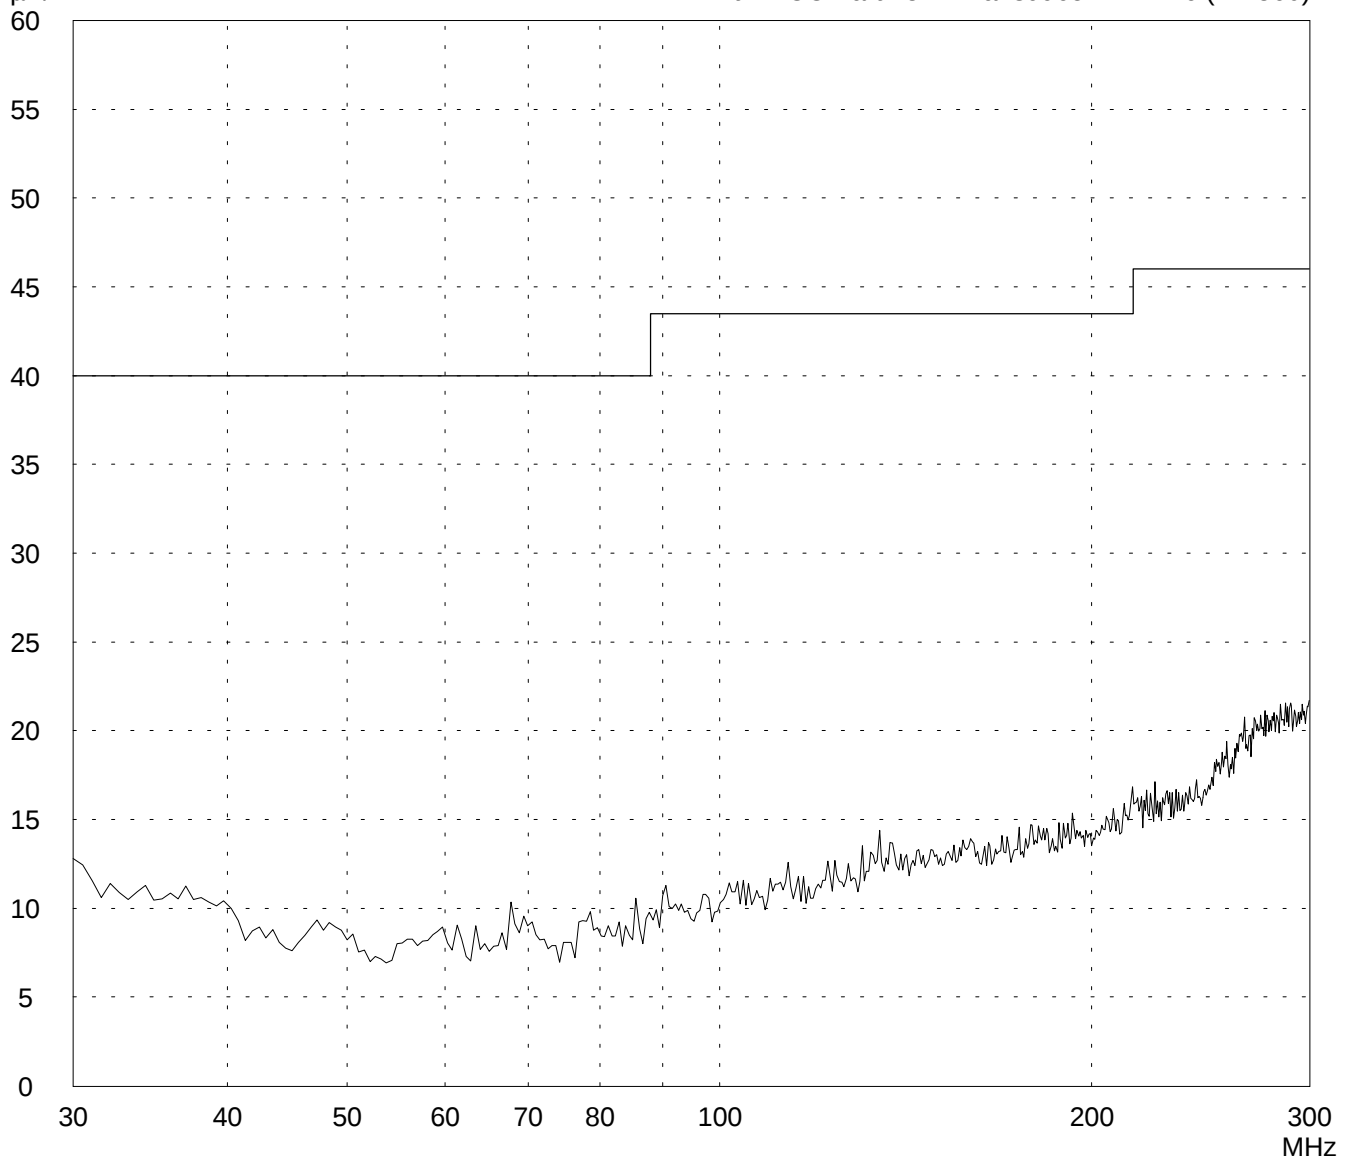

Result:
Prescan

Project file:
58002-30555-2

Page of Pages

Radiated Emission Test 30 MHz - 300 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:
CELSIUS Mobile Unit

Serial no.:
US MB

Applicant:
A.J. Fonseca Lda

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Vertical Polarization

Date of test: August 16, 2003
Operator: J. Roidt

Test performed: automatically
File name: default.emi


Comment:
EUT on long side

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

dB μ V/m

Limit1: FCC Part 15 Transducer: HK 116 (A-1560)

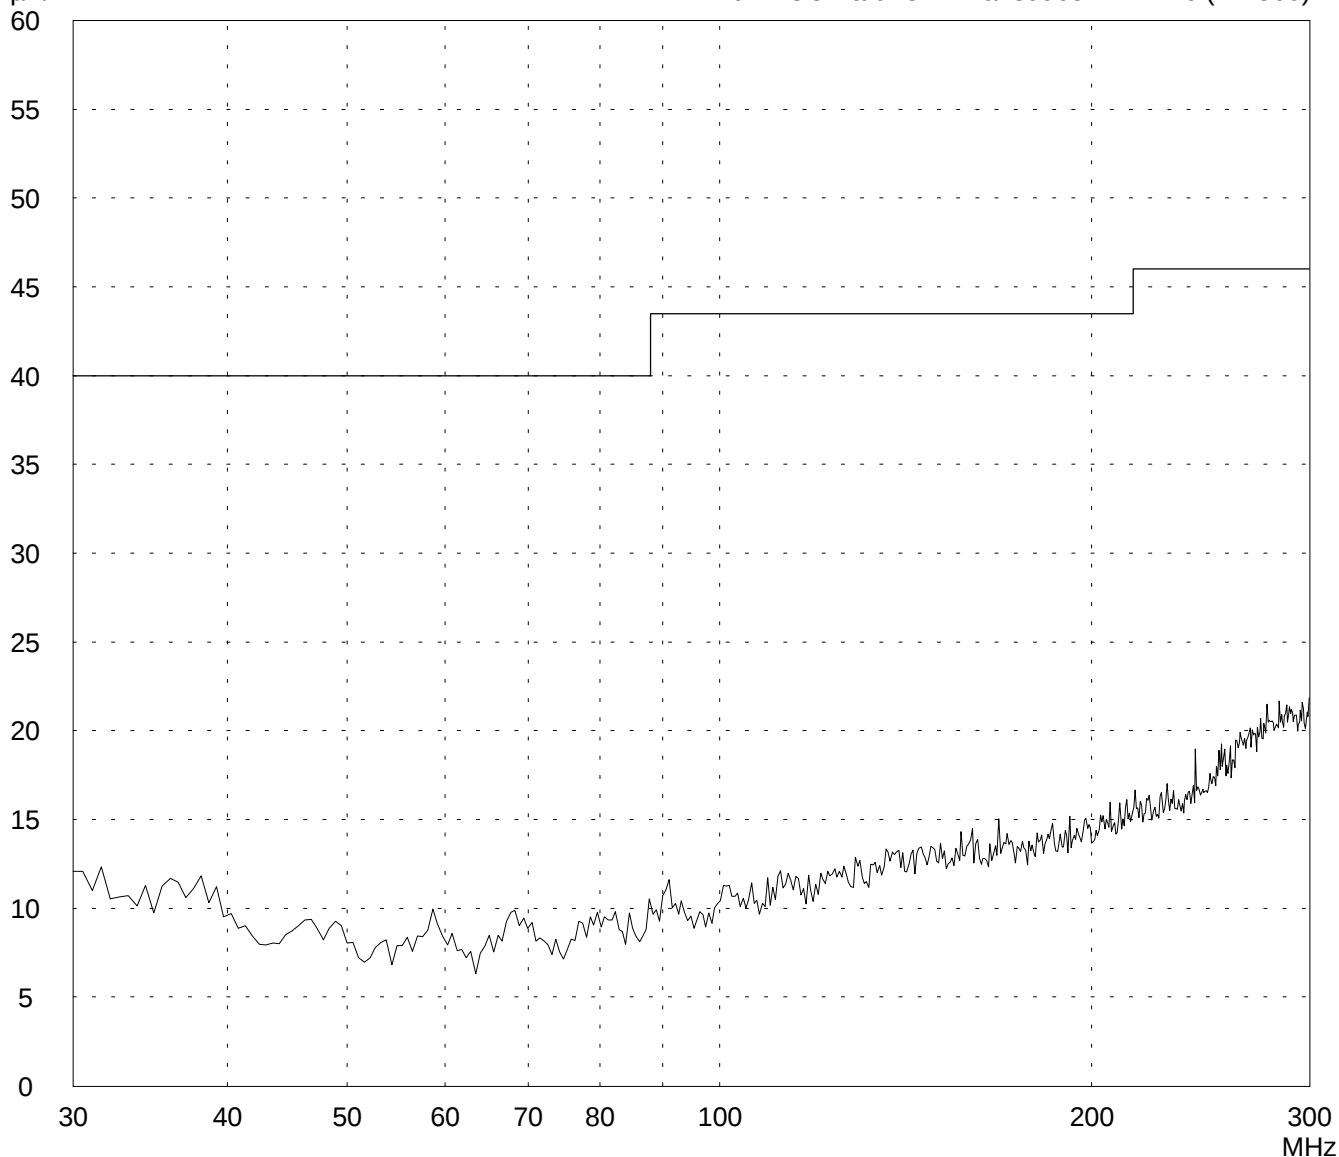

Result:
Prescan

Project file:
58002-30555-2

Page of Pages

Radiated Emission Test 30 MHz - 300 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:
CELSIUS Mobile Unit

Serial no.:
US MB

Applicant:
A.J. Fonseca Lda

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Horizontal Polarization

Date of test:
August 16, 2003

Operator:
J. Roidt

Test performed:
automatically

File name:
default.emi


Comment:
EUT in upright position

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

dB μ V/m

Limit1: FCC Part 15 Transducer: HK 116 (A-1560)

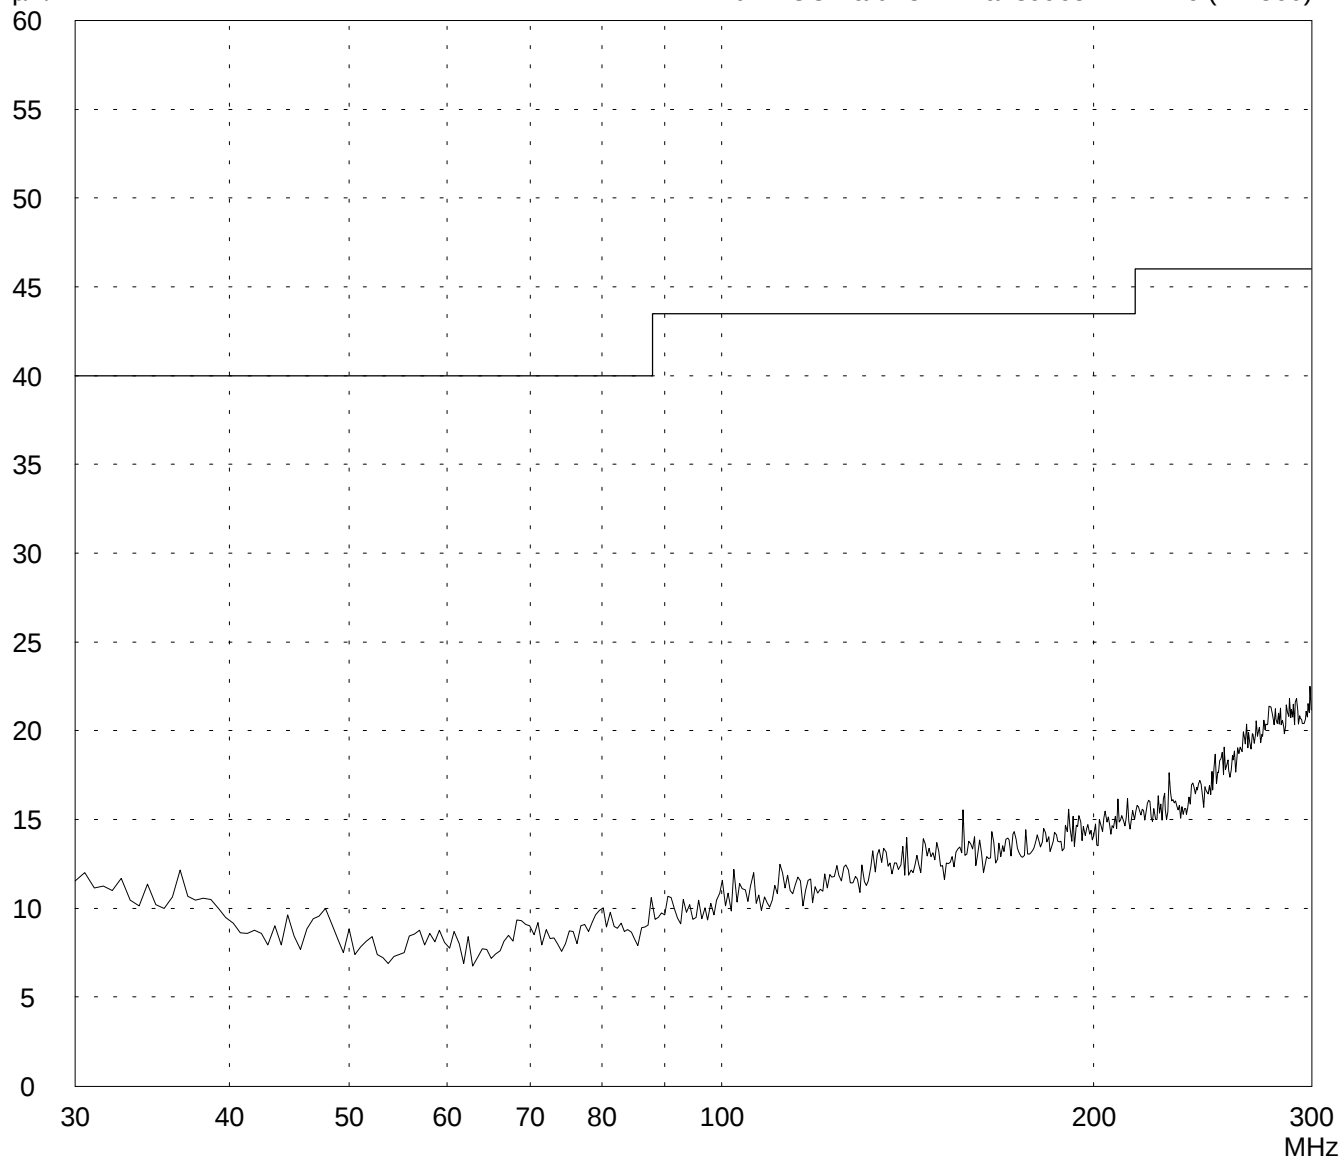

Result:
Prescan

Project file:
58002-30555-2

Page of Pages

Radiated Emission Test 30 MHz - 300 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:
CELSIUS Mobile Unit

Serial no.:
US MB

Applicant:
A.J. Fonseca Lda

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Vertical Polarization

Date of test:
August 16, 2003

Operator:
J. Roidt

Test performed:
automatically

File name:
default.emi


Comment:
EUT in upright position

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

$\text{dB}\mu\text{V/m}$

Limit1: FCC Part 15 Transducer: HK 116 (A-1560)

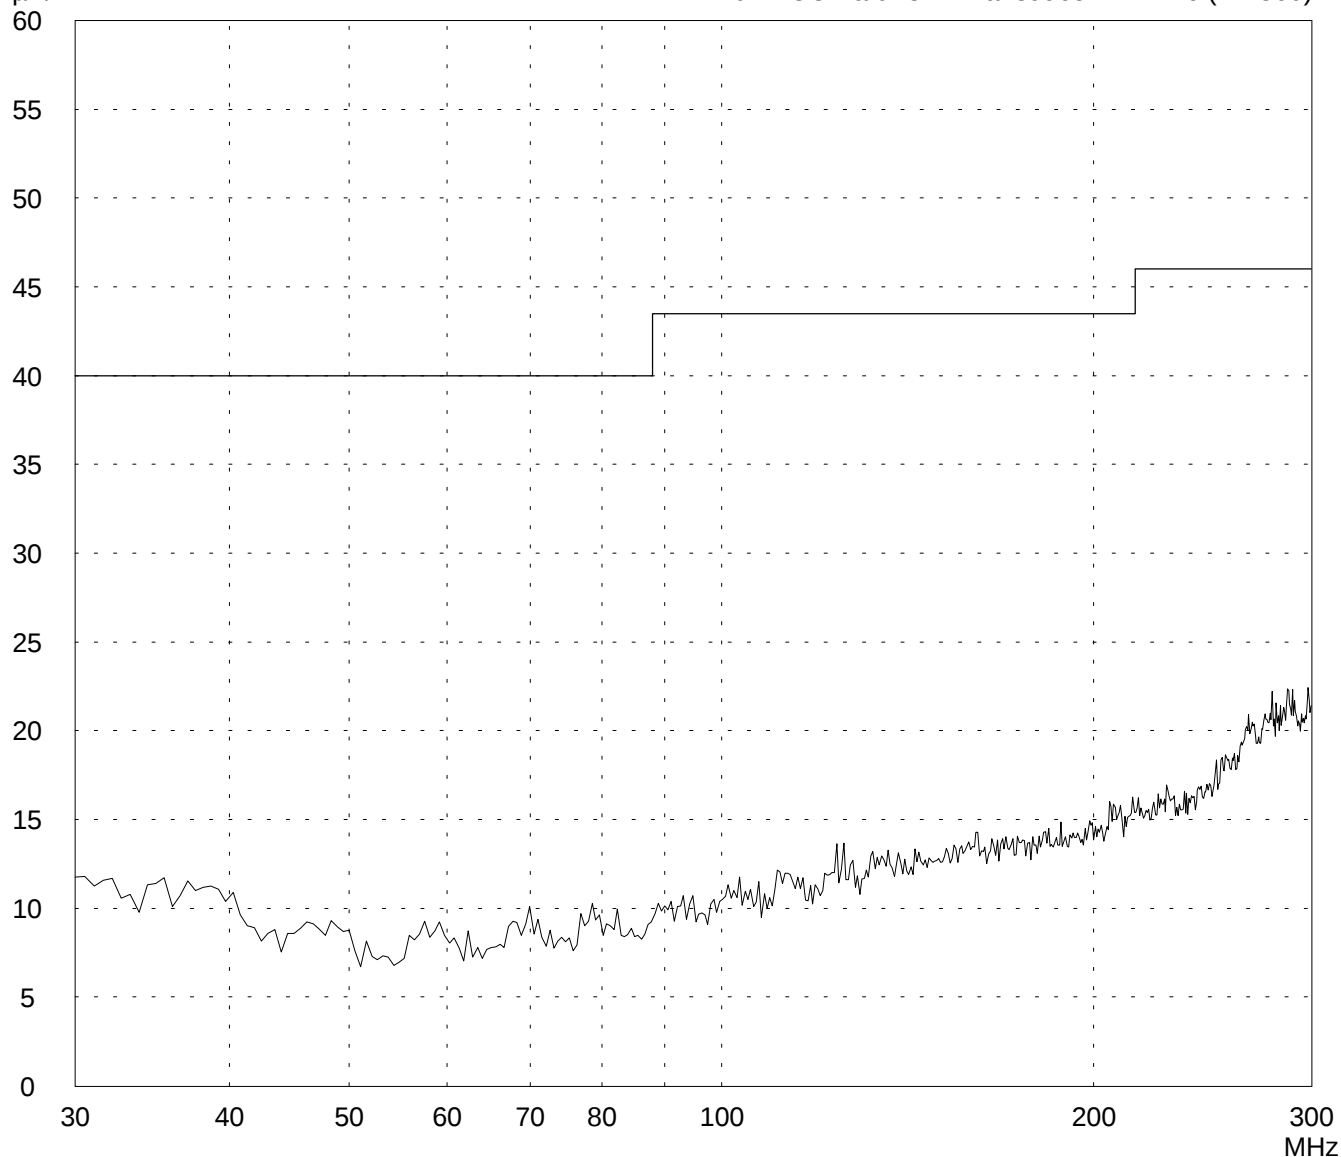

Result:
Prescan

Project file:
58002-30555-2

Page of Pages

Radiated Emission Test 300 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:
CELSIUS Mobil Unit

Serial no.:
US MB

Applicant:
A. J. Fonseca Lda

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Horizontal Polarization

Date of test:
09/24/2003

Operator:
M. Steindl

Test performed:
automatically

File name:
default.emi

Comment:
- EUT on long side


Detector:
Peak

List of values:
10 dB Margin

50 Subranges

$\text{dB}\mu\text{V/m}$

Limit1: FCC Part 15 Transducer: EMCO 3147 (A-1009)

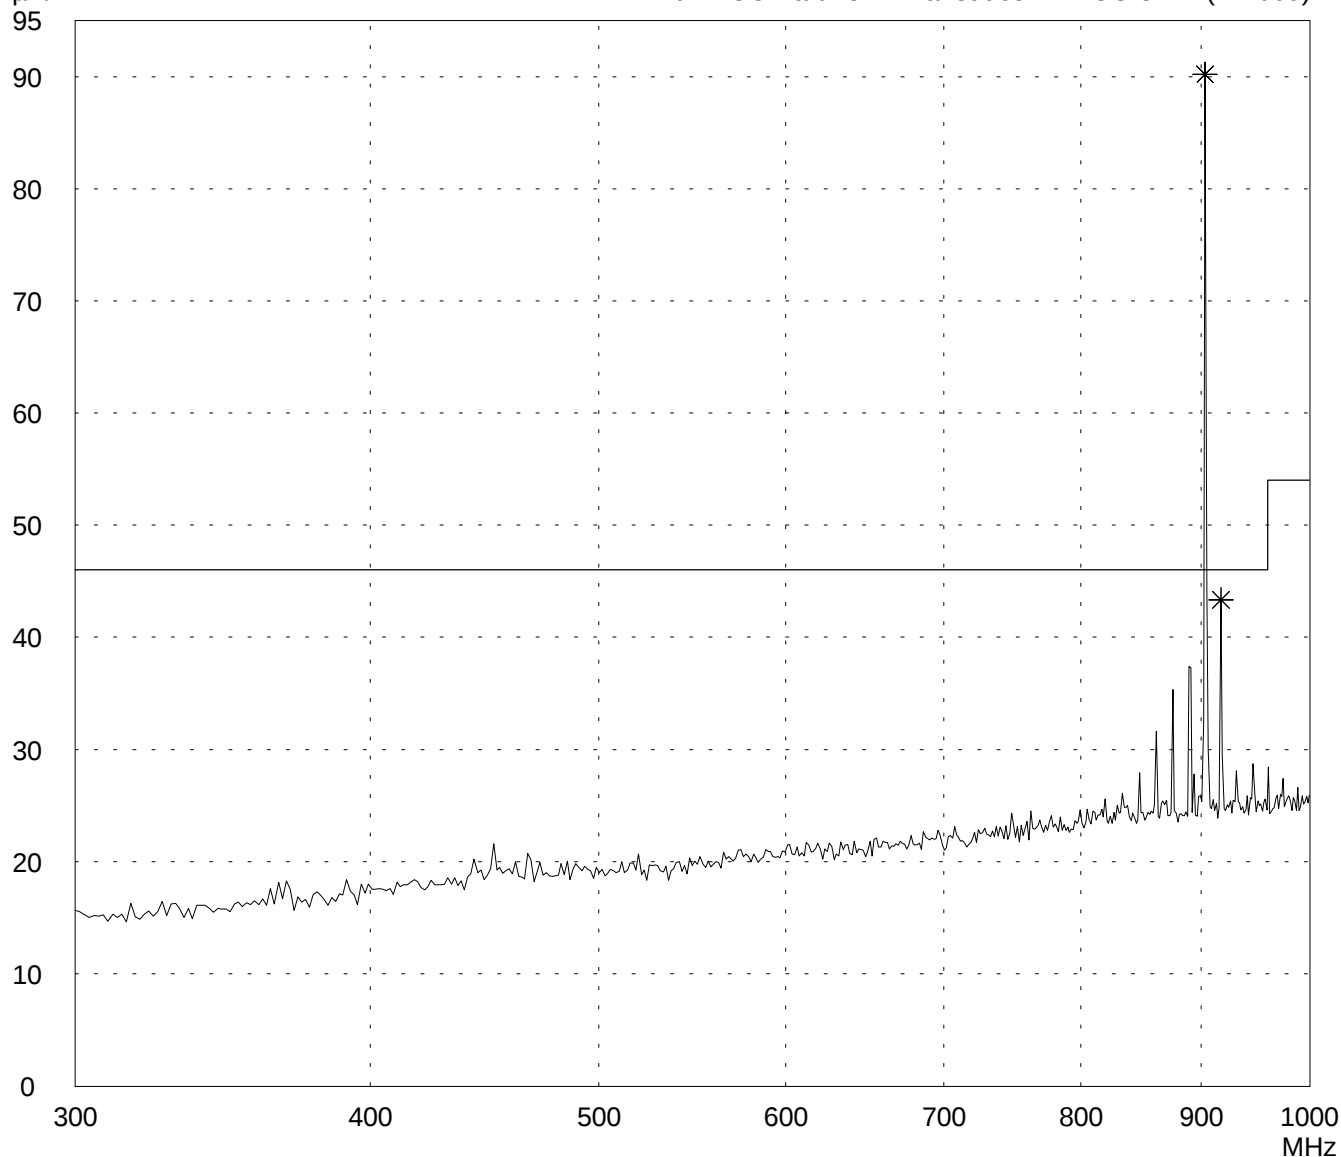

Result:
Prescan

Project file:
58002-30555-2

Page of Pages

Radiated Emission Test 300 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:
CELSIUS Mobil Unit

Serial no.:
US MB

Applicant:
A. J. Fonseca Lda

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Vertical Polarization

Date of test:
09/24/2003

Operator:
M. Steindl

Test performed:
automatically

File name:
default.emi

Comment:
- EUT flat on table


Detector:
Peak

List of values:
10 dB Margin

50 Subranges

$\text{dB}\mu\text{V/m}$

Limit1: FCC Part 15 Transducer: EMCO 3147 (A-1009)

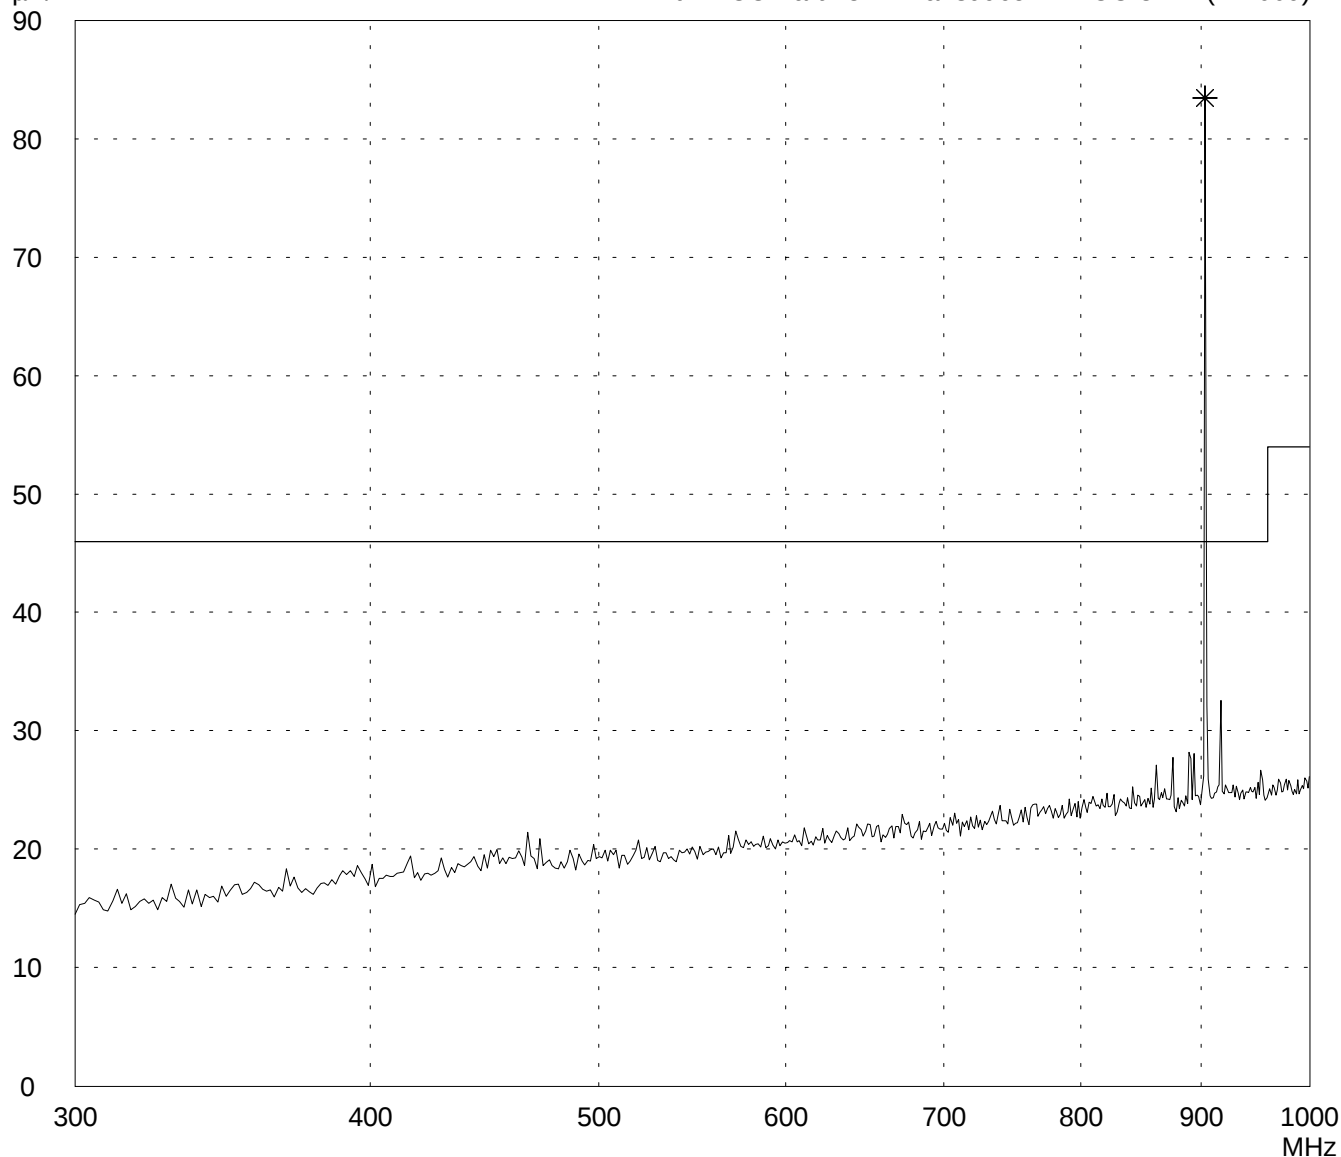

Result:
Prescan

Project file:
58002-30555-2

Page of Pages

Radiated Emission Test 300 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:
CELSIUS Mobil Unit

Serial no.:
US MB

Applicant:
A. J. Fonseca Lda

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Horizontal Polarization

Date of test:
09/24/2003

Operator:
M. Steindl

Test performed:
automatically

File name:
default.emi

Comment:
- EUT flat on table


Detector:
Peak

List of values:
10 dB Margin

50 Subranges

$\text{dB}\mu\text{V/m}$

Limit1: FCC Part 15 Transducer: EMCO 3147 (A-1009)

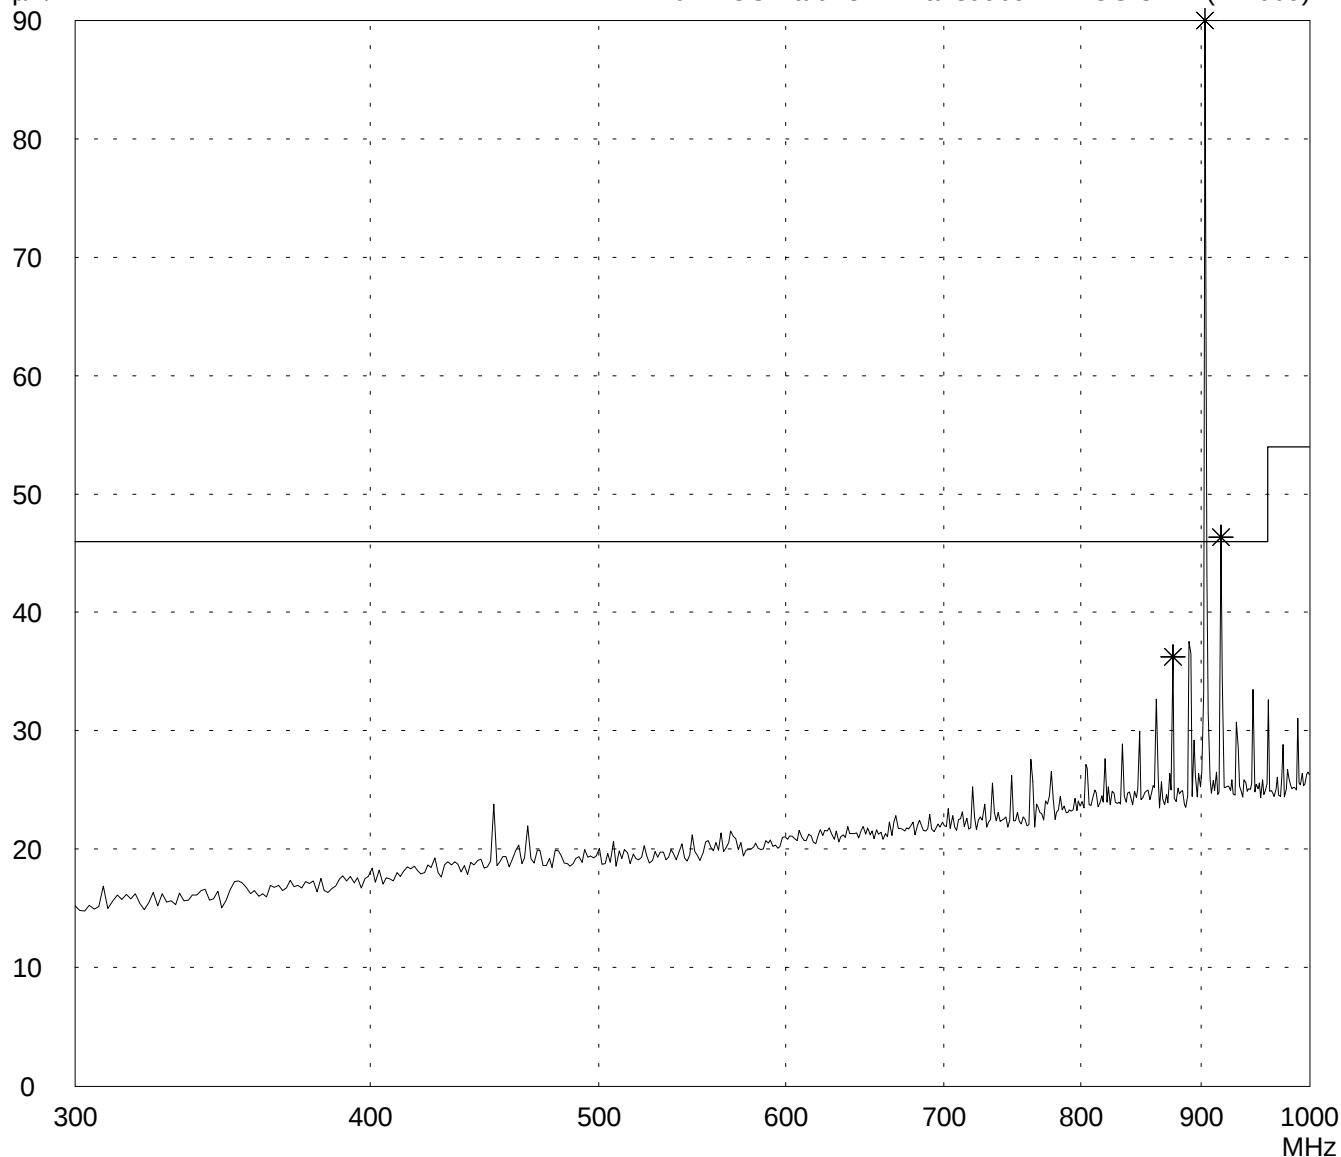

Result:
Prescan

Project file:
58002-30555-2

Page of Pages

Radiated Emission Test 300 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:
CELSIUS Mobil Unit

Serial no.:
US MB

Applicant:
A. J. Fonseca Lda

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Vertical Polarization

Date of test:
09/24/2003

Operator:
M. Steindl

Test performed:
automatically

File name:
default.emi

Comment:
- EUT on long side


Detector:
Peak

List of values:
10 dB Margin

50 Subranges

$\text{dB}\mu\text{V/m}$

Limit1: FCC Part 15 Transducer: EMCO 3147 (A-1009)

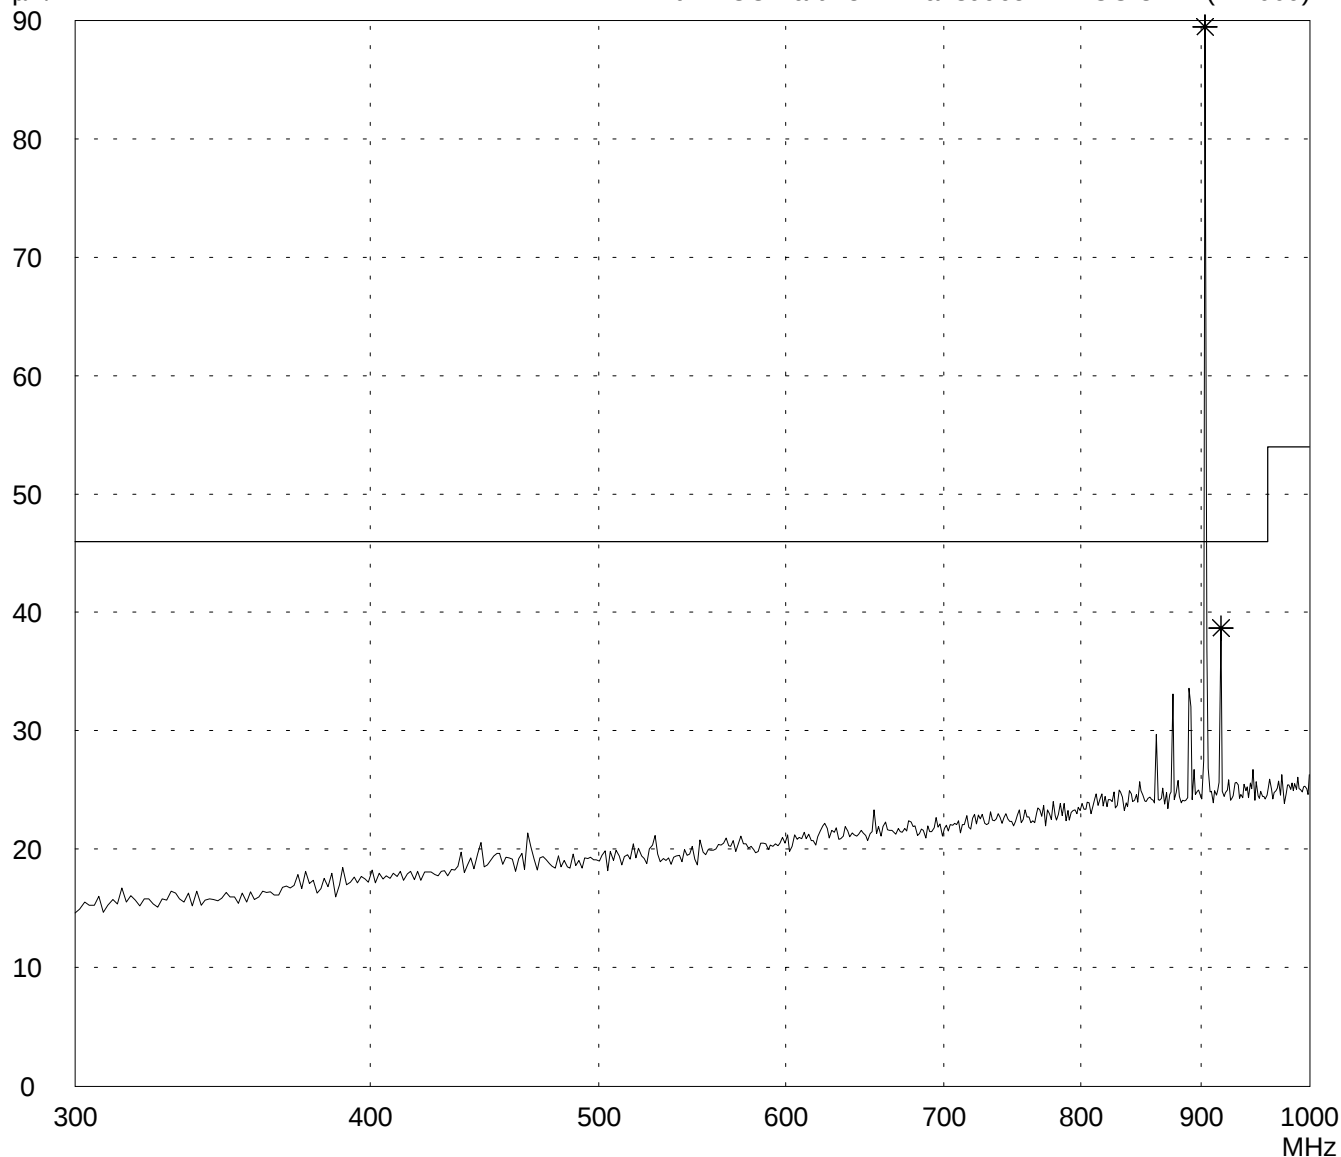

Result:
Prescan

Project file:
58002-30555-2

Page of Pages

Radiated Emission Test 300 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:
CELSIUS Mobil Unit

Serial no.:
US MB

Applicant:
A. J. Fonseca Lda

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Horizontal Polarization

Date of test:
09/24/2003

Operator:
M. Steindl

Test performed:
automatically

File name:
default.emi

Comment:
- EUT in upright position


Detector:
Peak

List of values:
10 dB Margin

50 Subranges

$\text{dB}\mu\text{V/m}$

Limit1: FCC Part 15 Transducer: EMCO 3147 (A-1009)

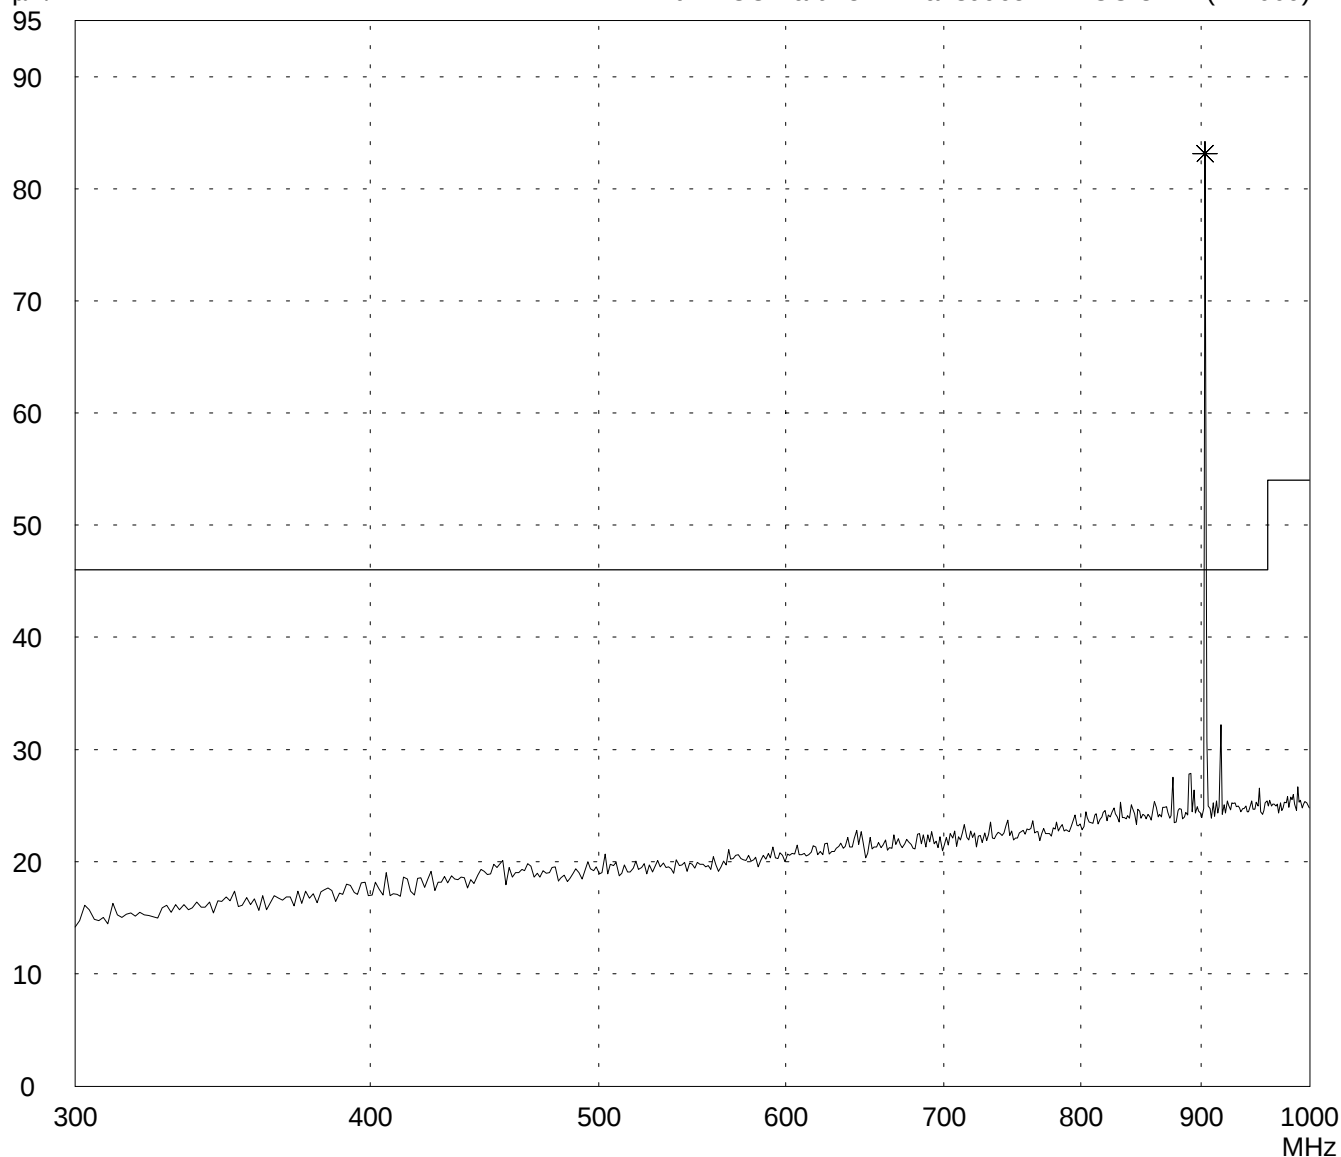

Result:
Prescan

Project file:
58002-30555-2

Page of Pages

Radiated Emission Test 300 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:
CELSIUS Mobil Unit

Serial no.:
US MB

Applicant:
A. J. Fonseca Lda

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Vertical Polarization

Date of test:
09/24/2003

Operator:
M. Steindl

Test performed:
automatically

File name:
default.emi

Comment:
- EUT in upright position


Detector:
Peak

List of values:
10 dB Margin

50 Subranges

$\text{dB}\mu\text{V/m}$

Limit1: FCC Part 15 Transducer: EMCO 3147 (A-1009)

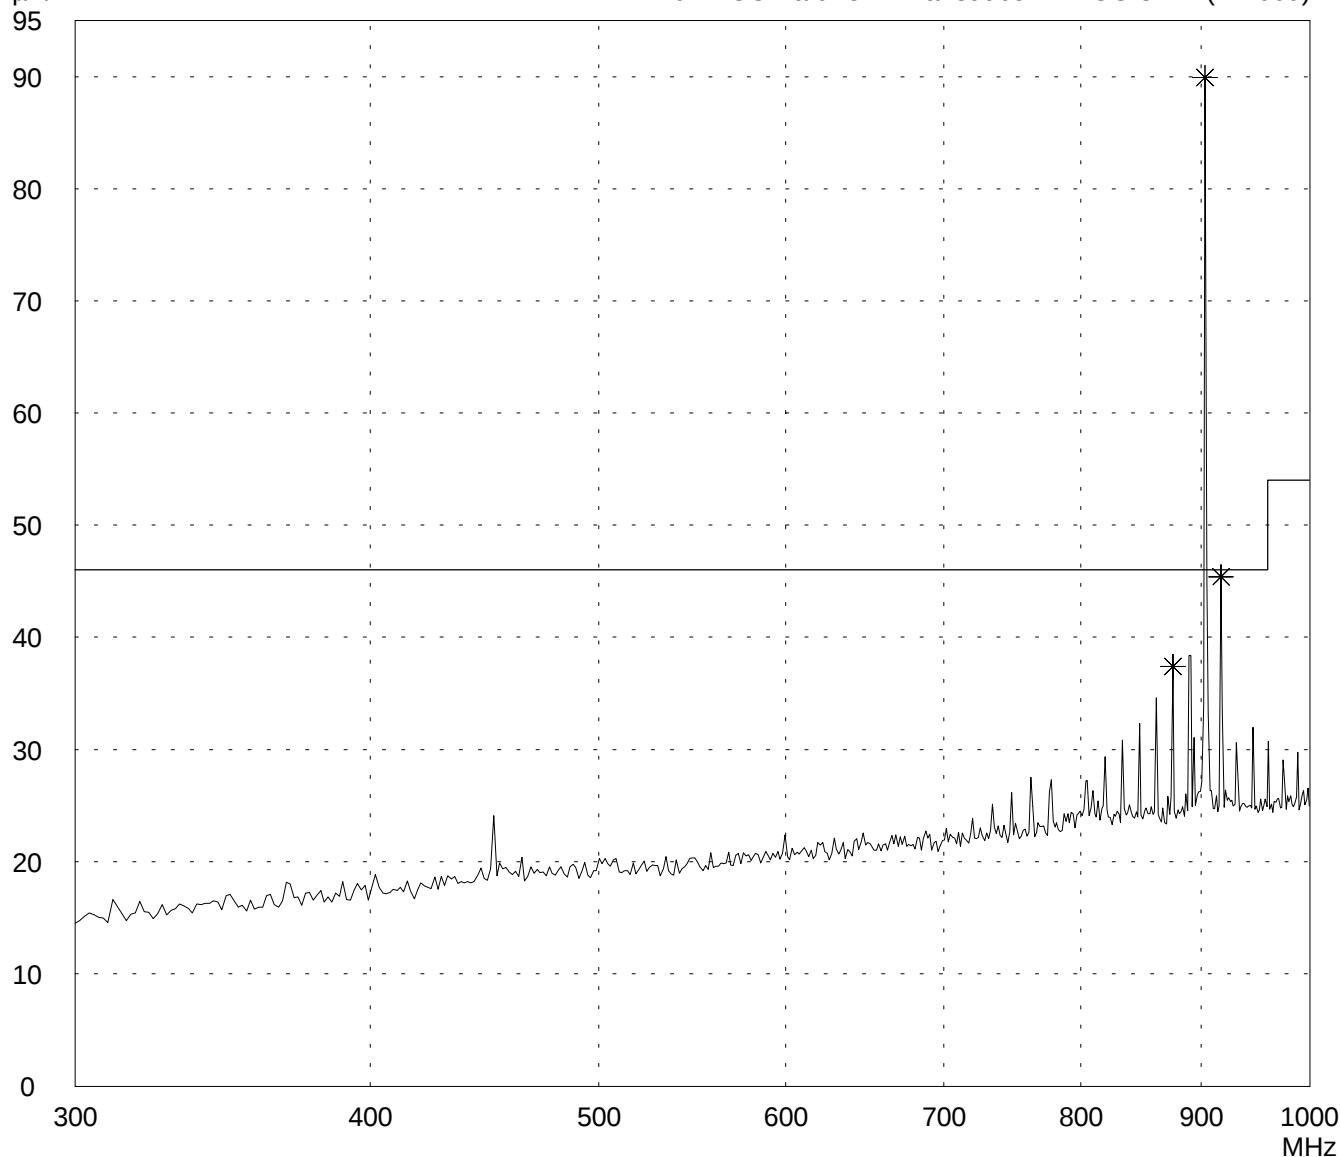

Result:
Prescan

Project file:
58002-30555-2

Page of Pages

Radiated Emission Test 1 GHz - 3.95 GHz acc. to FCC Part 15 (EMCO 3115)

Model:
CELSIUS Mobil Unit

Serial no.:
US MB

Applicant:
A. J. Fonseca Lda.

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Vertical Polarization

Date of test: 09/25/2003 Operator: M. Steindl


Test performed: automatically File name: default.emi

Comment:
- EUT on long side

- with WHKS1000-10SS high pass filter

Detector:
Peak

List of values:
Selected by hand

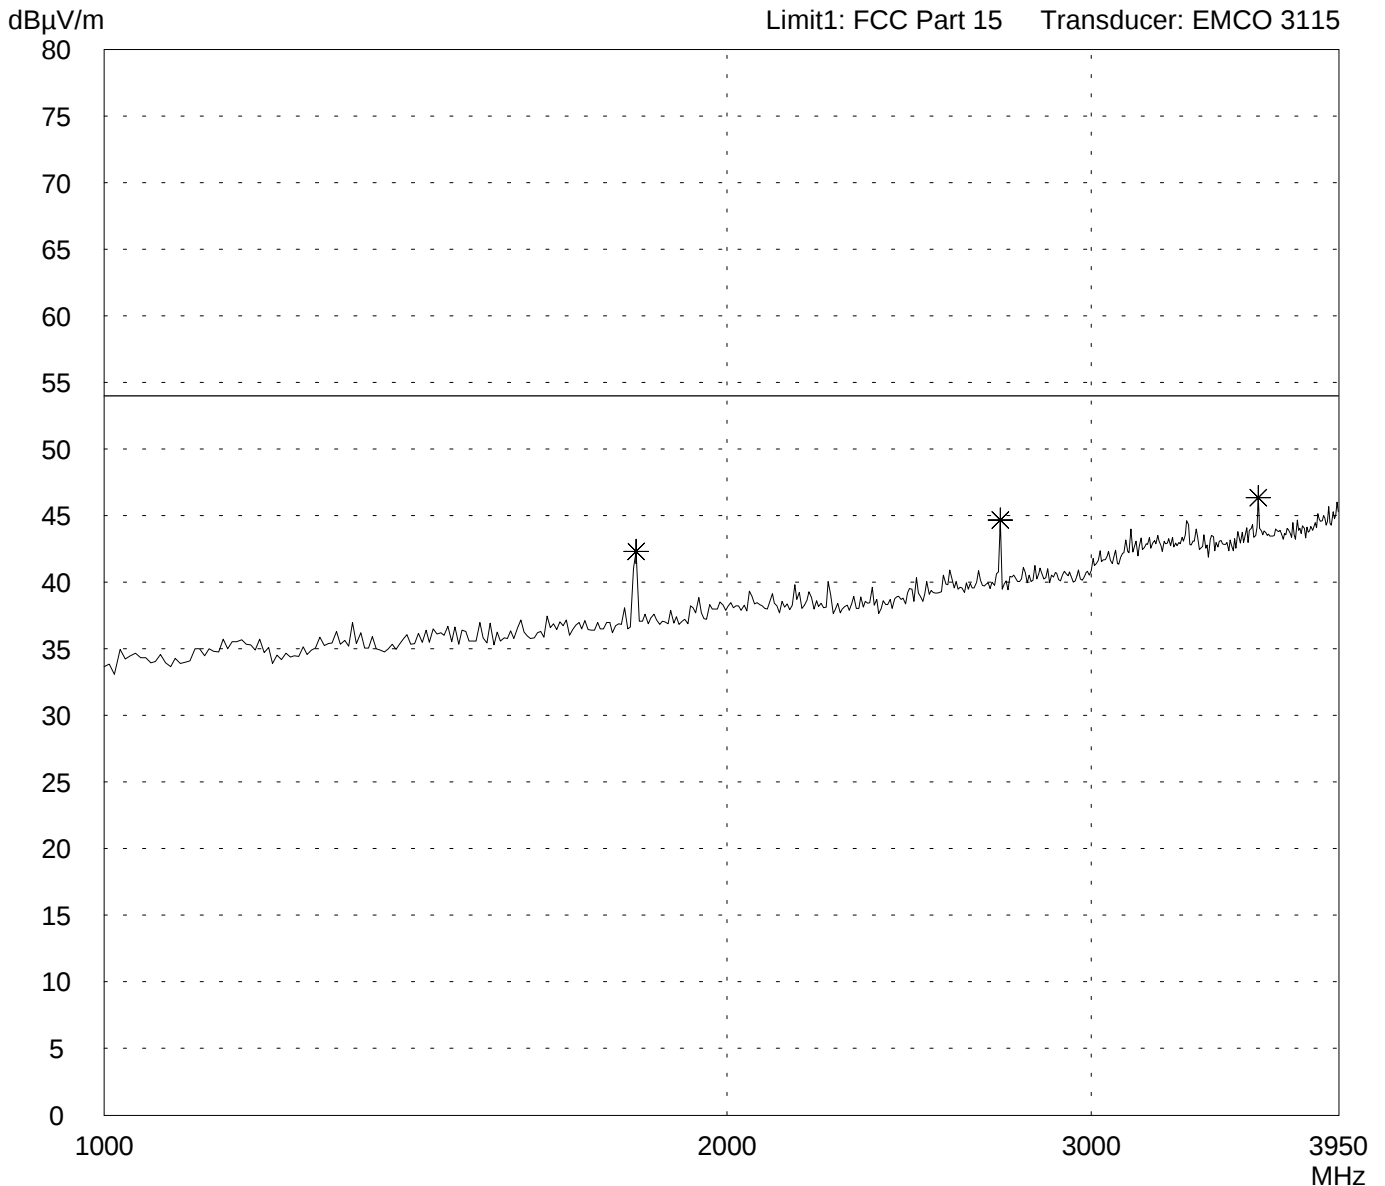

Result:
Limit kept

Project file:
58002-30555-2

Page of Pages

Radiated Emission Test 1 GHz - 3.95 GHz acc. to FCC Part 15 (EMCO 3115)

Model:
CELSIUS Mobil Unit

Serial no.:
US MB

Applicant:
A. J. Fonseca Lda.

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Vertical Polarization

Date of test: 09/25/2003 Operator: M. Steindl

Test performed: automatically File name: default.emi

Comment:
- EUT flat on table


- with WHKS1000-10SS high pass filter

Detector:
Peak

List of values:
Selected by hand

$\text{dB}\mu\text{V/m}$

Limit1: FCC Part 15 Transducer: EMCO 3115

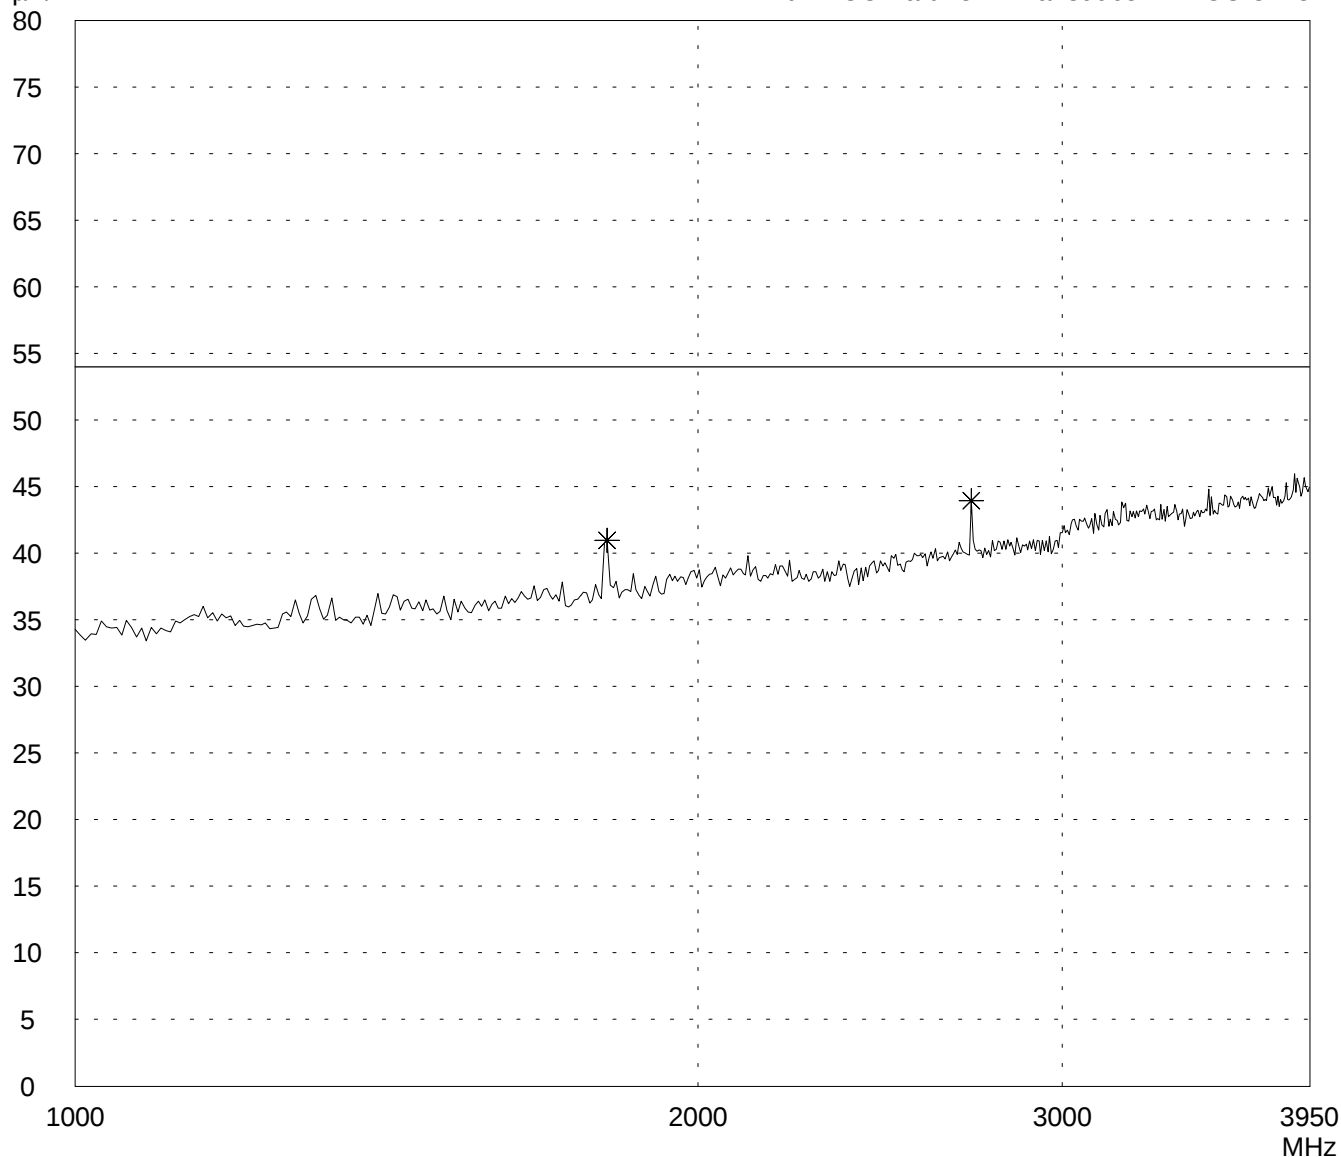

Result:
Limit kept

Project file:
58002-30555-2

Page of Pages

Radiated Emission Test 1 GHz - 3.95 GHz acc. to FCC Part 15 (EMCO 3115)

Model:
CELSIUS Mobil Unit

Serial no.:
US MB

Applicant:
A. J. Fonseca Lda.

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Horizontal Polarization

Date of test: 09/25/2003 Operator: M. Steindl

Test performed: automatically File name: default.emi

Comment:
- EUT on long side


- with WHKS1000-10SS high pass filter

Detector:
Peak

List of values:
Selected by hand

dB μ V/m

Limit1: FCC Part 15 Transducer: EMCO 3115

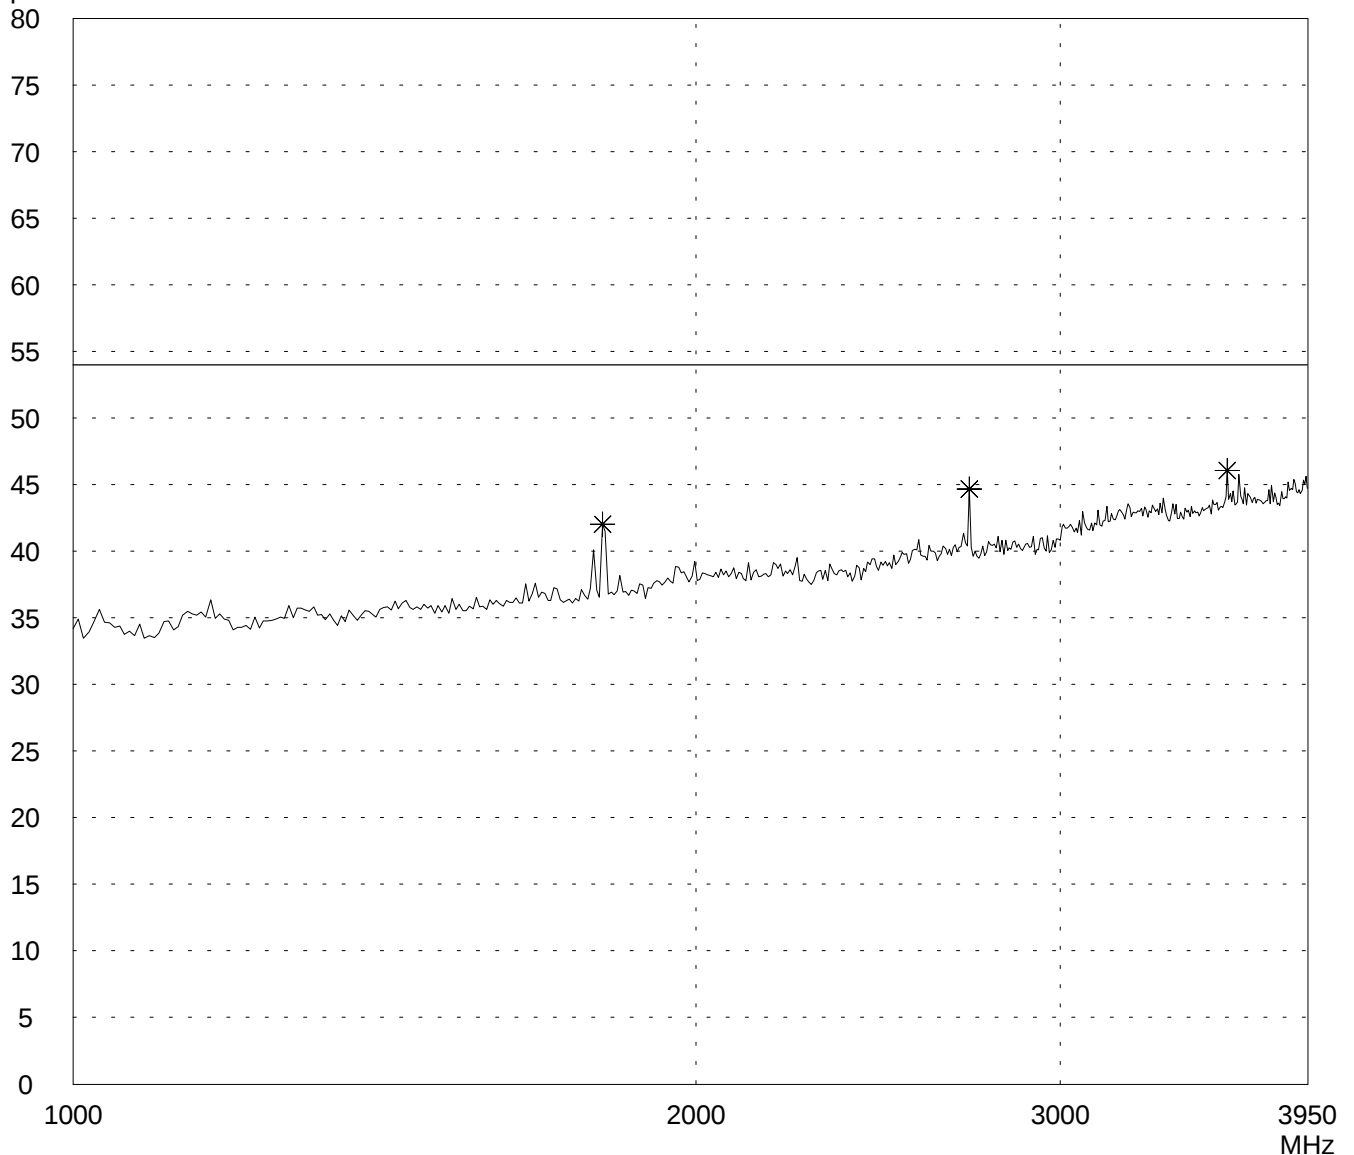

Result:
Limit kept

Project file:
58002-30555-2

Page of Pages

Radiated Emission Test 1 GHz - 3.95 GHz acc. to FCC Part 15 (EMCO 3115)

Model:
CELSIUS Mobil Unit

Serial no.:
US MB

Applicant:
A. J. Fonseca Lda.

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Horizontal Polarization

Date of test: 09/25/2003 Operator: M. Steindl


Test performed: automatically File name: default.emi

Comment:
- EUT flat on table

- with WHKS1000-10SS high pass filter

Detector:
Peak

List of values:
Selected by hand

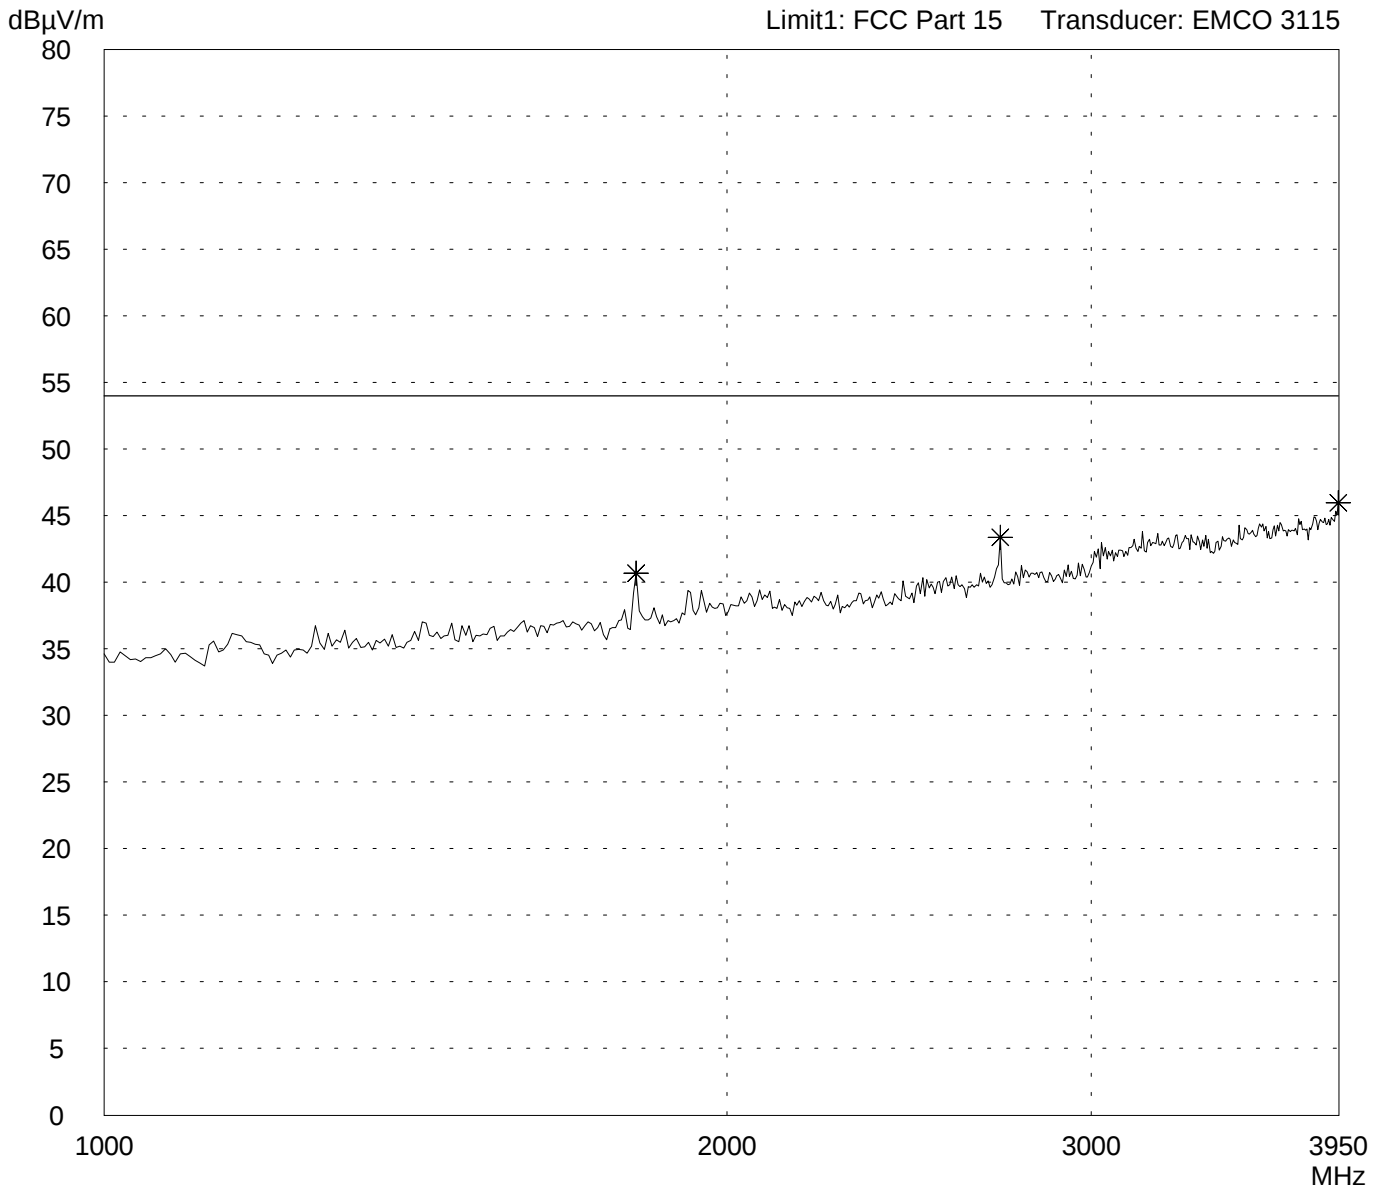

Result:
Limit kept

Project file:
58002-30555-2

Page of Pages

Radiated Emission Test 1 GHz - 3.95 GHz acc. to FCC Part 15 (EMCO 3115)

Model:
CELSIUS Mobil Unit

Serial no.:
US MB

Applicant:
A. J. Fonseca Lda.

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Horizontal Polarization

Date of test: 09/25/2003 Operator: M. Steindl


Test performed: automatically File name: default.emi

Comment:
- EUT in upright position

- with WHKS1000-10SS high pass filter

Detector:
Peak

List of values:
Selected by hand

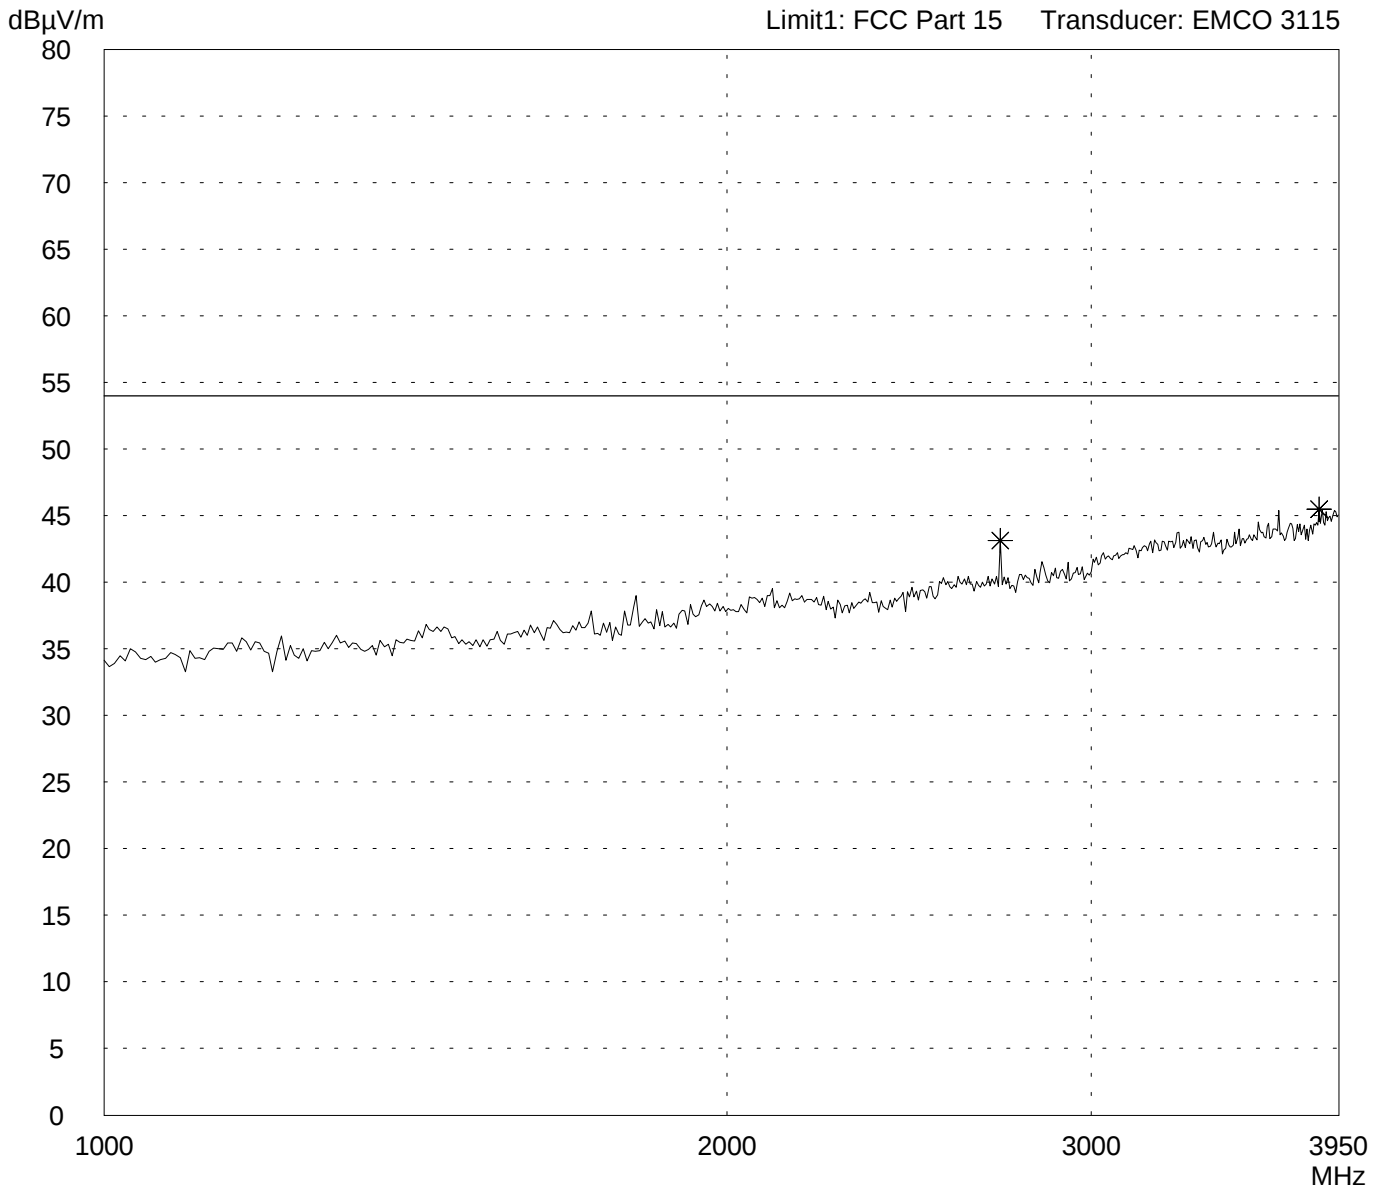

Result:
Limit kept

Project file:
58002-30555-2

Page of Pages

Radiated Emission Test 1 GHz - 3.95 GHz acc. to FCC Part 15 (EMCO 3115)

Model:
CELSIUS Mobil Unit

Serial no.:
US MB

Applicant:
A. J. Fonseca Lda.

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Vertical Polarization

Date of test: 09/25/2003 Operator: M. Steindl

Test performed: automatically File name: default.emi

Comment:
- EUT in upright position


- with WHKS1000-10SS high pass filter

Detector:
Peak

List of values:
Selected by hand

dB μ V/m

Limit1: FCC Part 15 Transducer: EMCO 3115

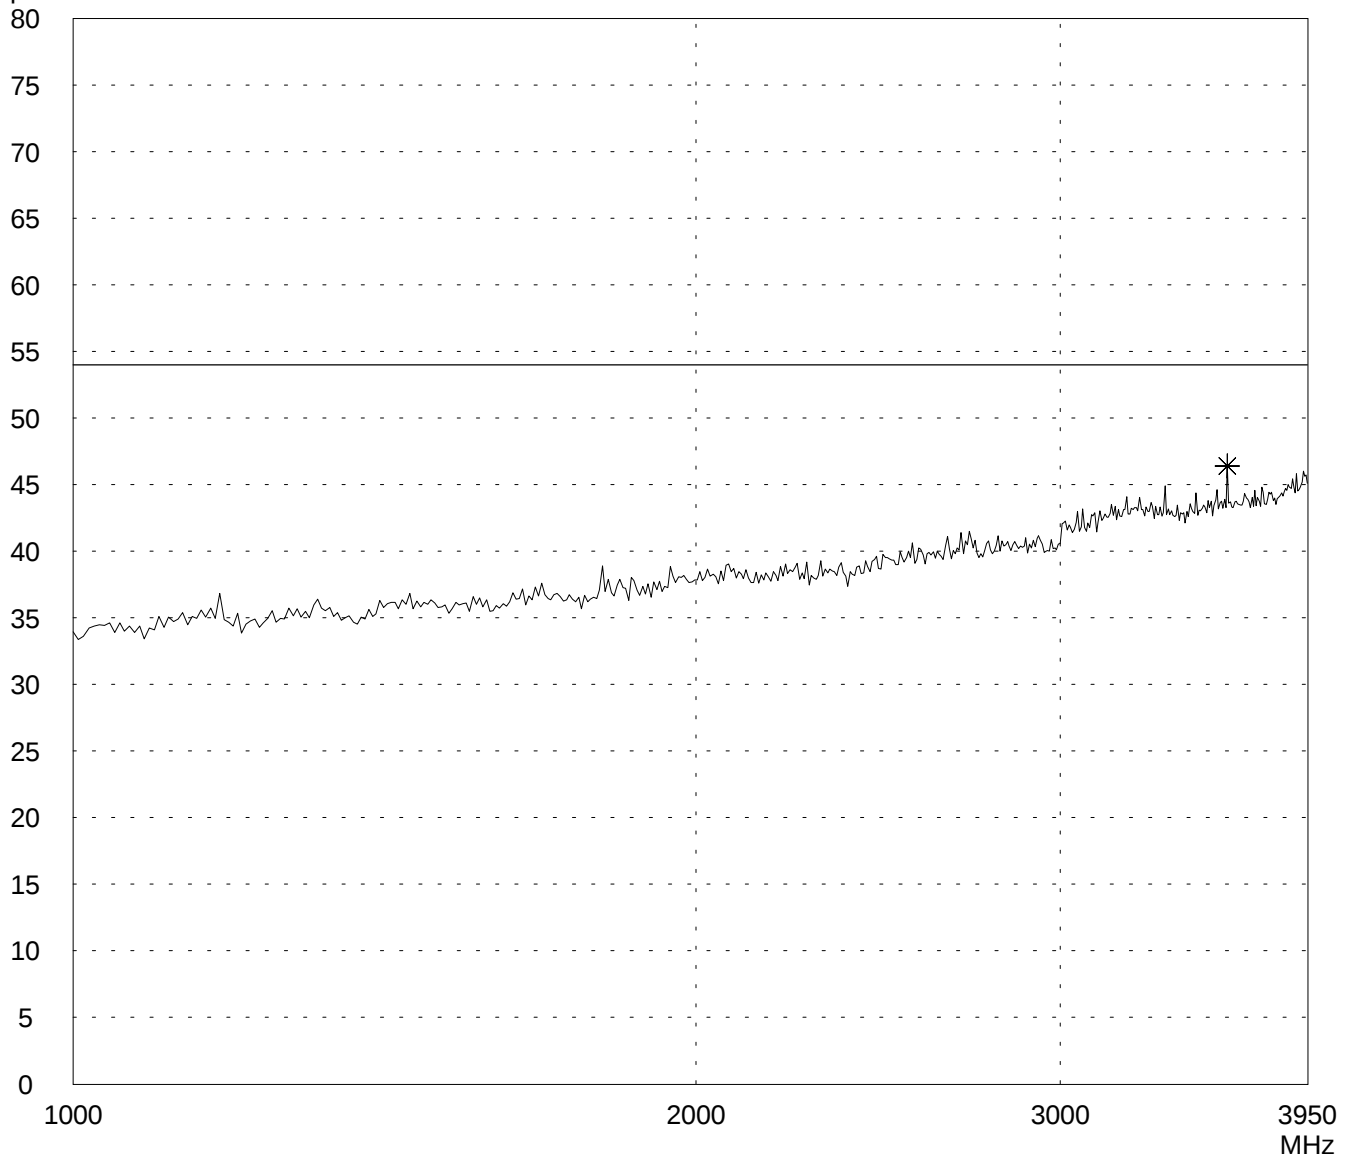

Result:
Limit kept

Project file:
58002-30555-2

Page of Pages

Radiated Emission Test 3.95 GHz - 5.85 GHz acc. to FCC Part 15 (EMCO 3160)

Model:
CELSIUS Mobil Unit

Serial no.:
US MB

Applicant:
A. J. Fonseca Lda.

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 1 meter
Horizontal Polarization

Date of test: 09/25/2003 Operator: M. Steindl

Test performed: automatically File name: default.emi

Comment:
- EUT on long side


- with WHKM3/13G-10SS high pass filter

Detector:
Peak

List of values:
Selected by hand

dBµV/m

Limit1: FCC Part 15 (1 m) Transducer: EMCO 3160

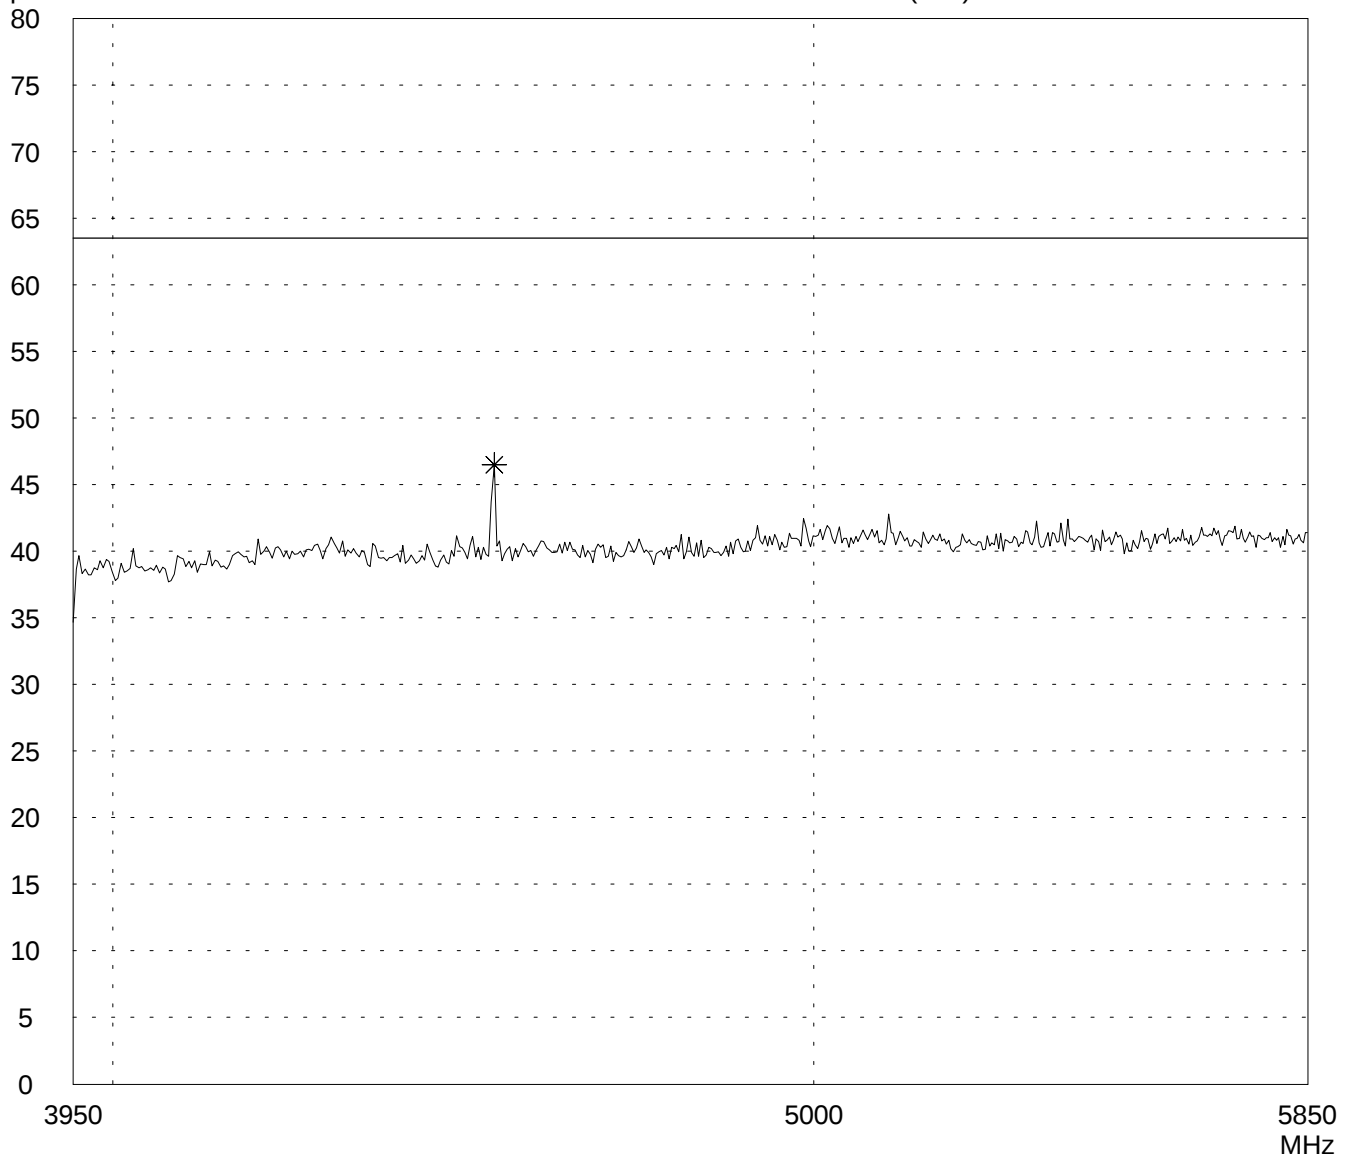

Result:
Limit kept

Project file:
58002-30555-2

Page of Pages

Radiated Emission Test 3.95 GHz - 5.85 GHz acc. to FCC Part 15 (EMCO 3160)

Model:
CELSIUS Mobil Unit

Serial no.:
US MB

Applicant:
A. J. Fonseca Lda.

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 1 meter
Vertical Polarization

Date of test: 09/25/2003 Operator: M. Steindl

Test performed: automatically File name: default.emi

Comment:
- EUT flat on table


- with WHKM3/13G-10SS high pass filter

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

dBµV/m

Limit1: FCC Part 15 (1 m) Transducer: EMCO 3160

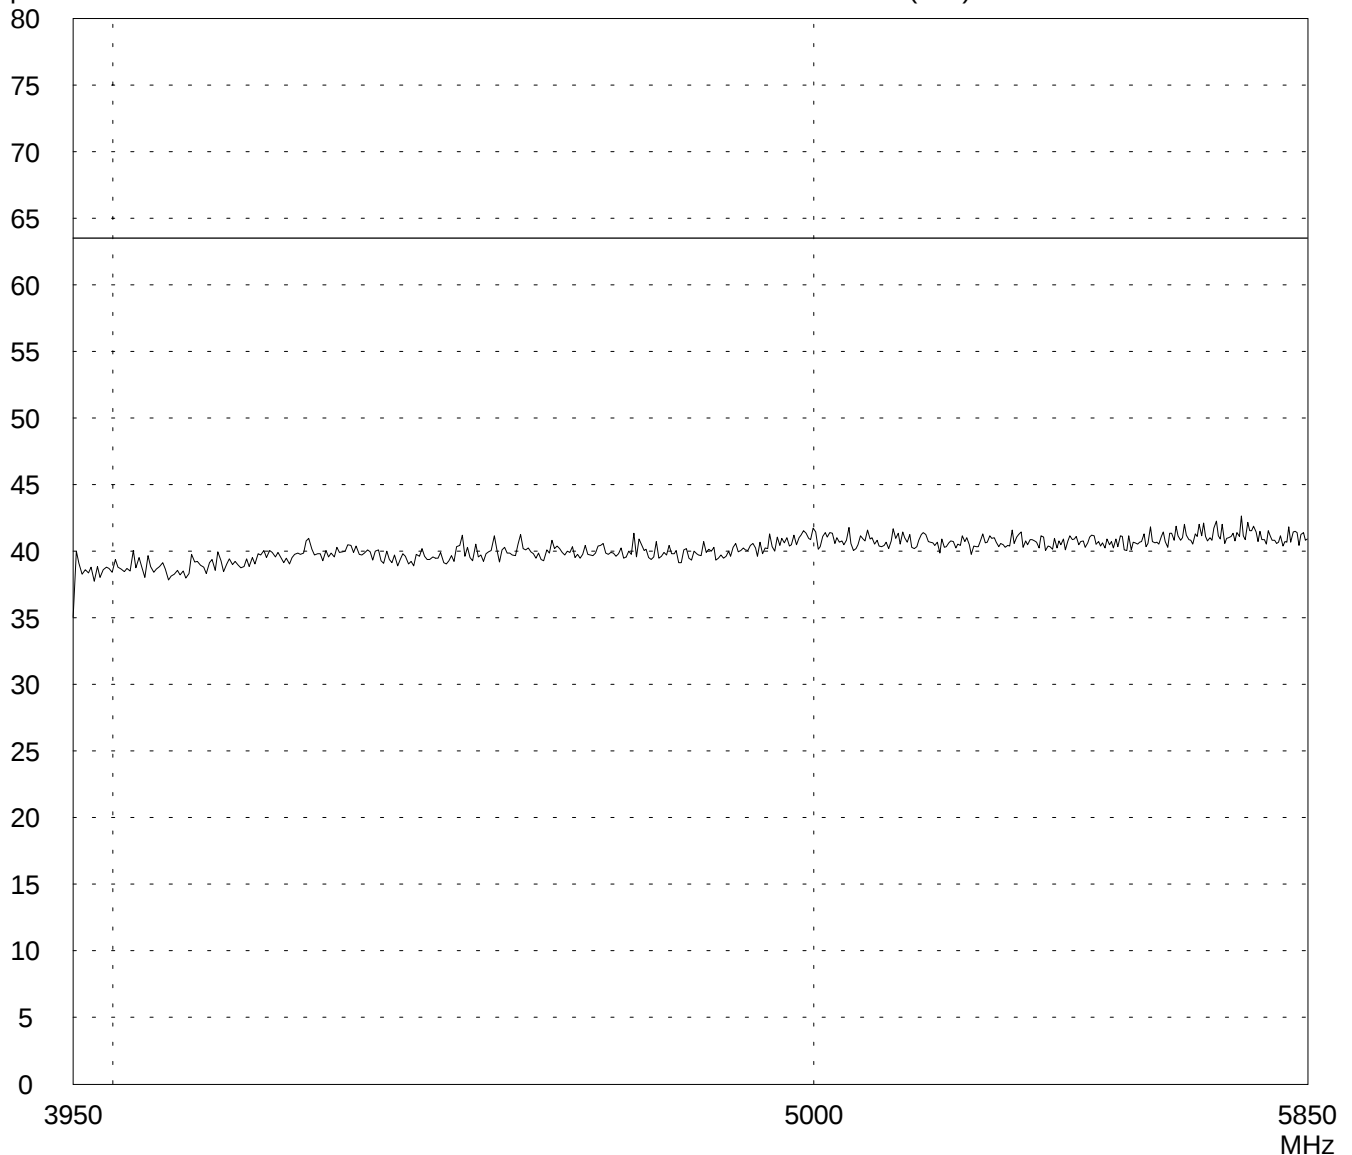

Result:
Limit kept

Project file:
58002-30555-2 Page of Pages

Radiated Emission Test 3.95 GHz - 5.85 GHz acc. to FCC Part 15 (EMCO 3160)

Model:
CELSIUS Mobil Unit

Serial no.:
US MB

Applicant:
A. J. Fonseca Lda.

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 1 meter
Horizontal Polarization

Date of test: 09/25/2003 Operator: M. Steindl

Test performed: automatically File name: default.emi

Comment:
- EUT flat on table


- with WHKM3/13G-10SS high pass filter

Detector:
Peak

List of values:
Selected by hand

dBµV/m

Limit1: FCC Part 15 (1 m) Transducer: EMCO 3160

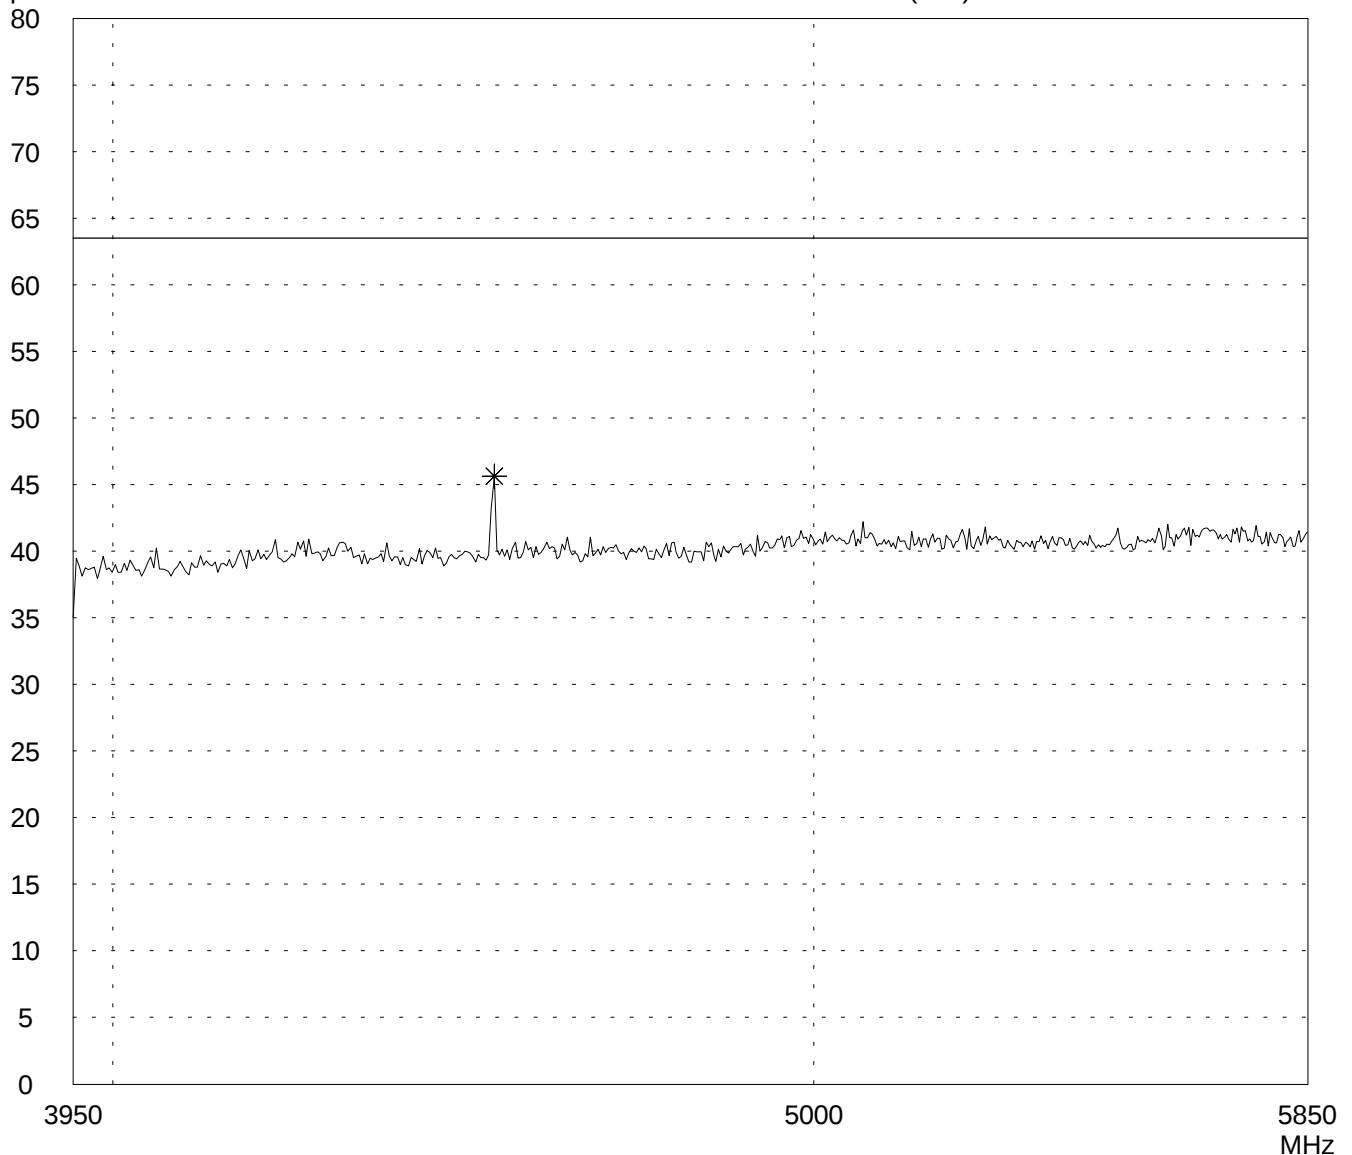

Result:
Limit kept

Project file:
58002-30555-2

Page of Pages

Radiated Emission Test 3.95 GHz - 5.85 GHz acc. to FCC Part 15 (EMCO 3160)

Model:
CELSIUS Mobil Unit

Serial no.:
US MB

Applicant:
A. J. Fonseca Lda.

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 1 meter
Vertical Polarization

Date of test: 09/25/2003 Operator: M. Steindl

Test performed: automatically File name: default.emi

Comment:
- EUT on long side


- with WHKM3/13G-10SS high pass filter

Detector:
Peak

List of values:
Selected by hand

dBµV/m

Limit1: FCC Part 15 (1 m) Transducer: EMCO 3160

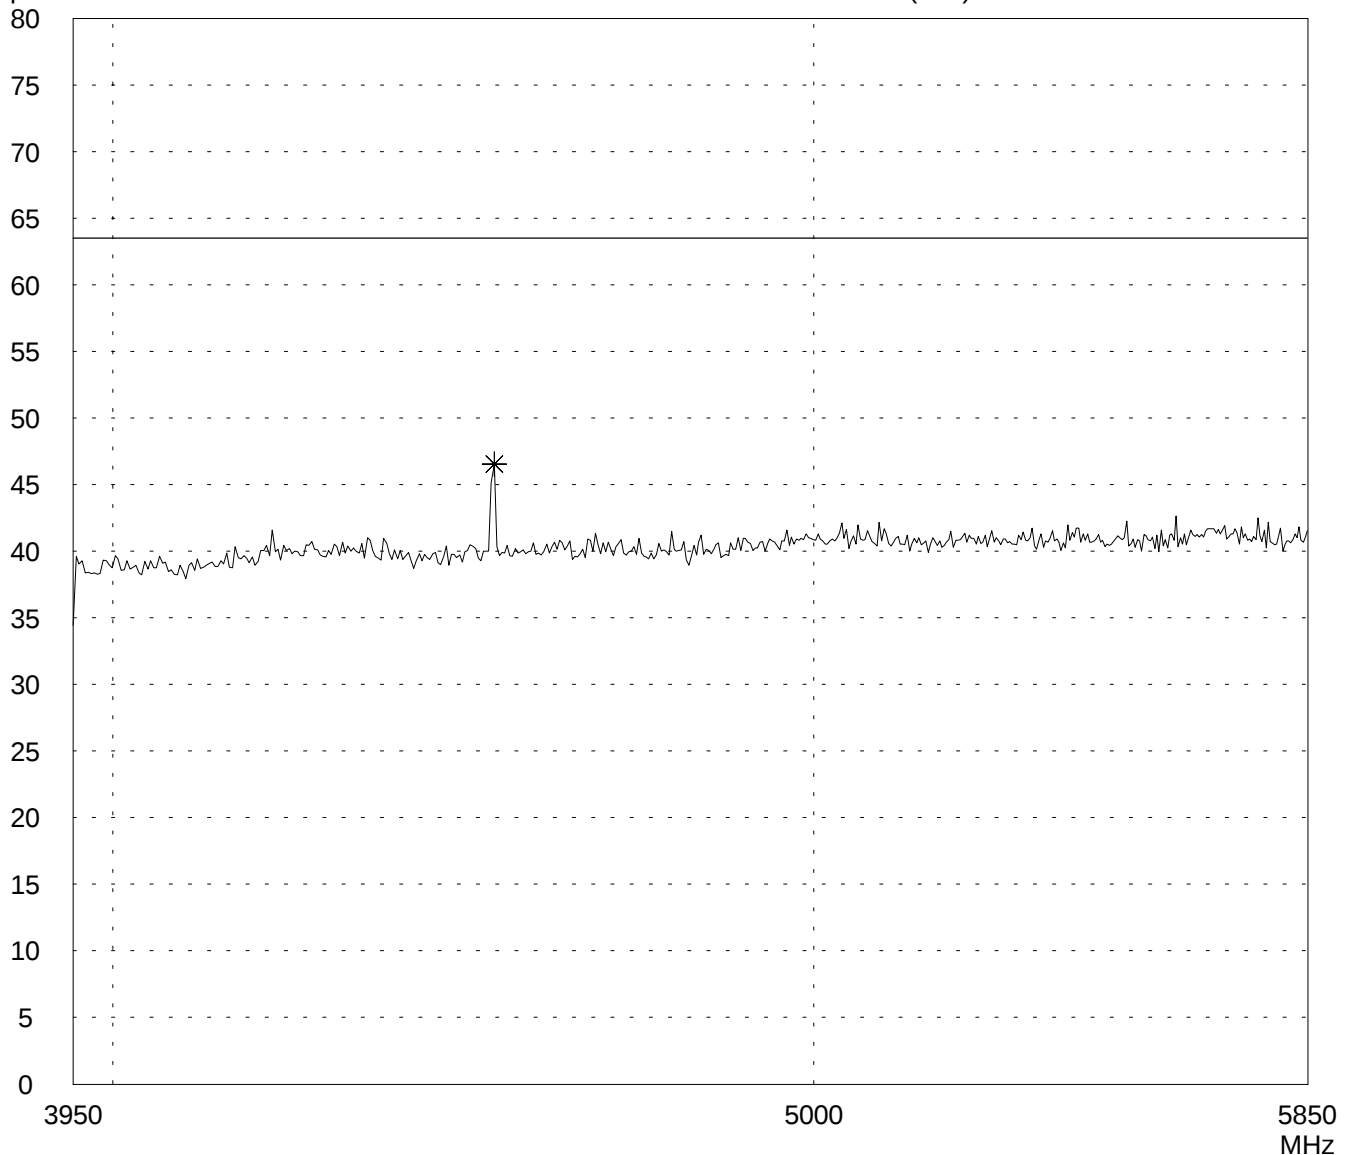

Result:
Limit kept

Project file:
58002-30555-2

Page of Pages

Radiated Emission Test 3.95 GHz - 5.85 GHz acc. to FCC Part 15 (EMCO 3160)

Model:
CELSIUS Mobil Unit

Serial no.:
US MB

Applicant:
A. J. Fonseca Lda.

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 1 meter
Horizontal Polarization

Date of test: 09/25/2003 Operator: M. Steindl

Test performed: automatically File name: default.emi

Comment:
- EUT in upright position


- with WHKM3/13G-10SS high pass filter

Detector:
Peak

List of values:
Selected by hand

dBµV/m

Limit1: FCC Part 15 (1 m) Transducer: EMCO 3160

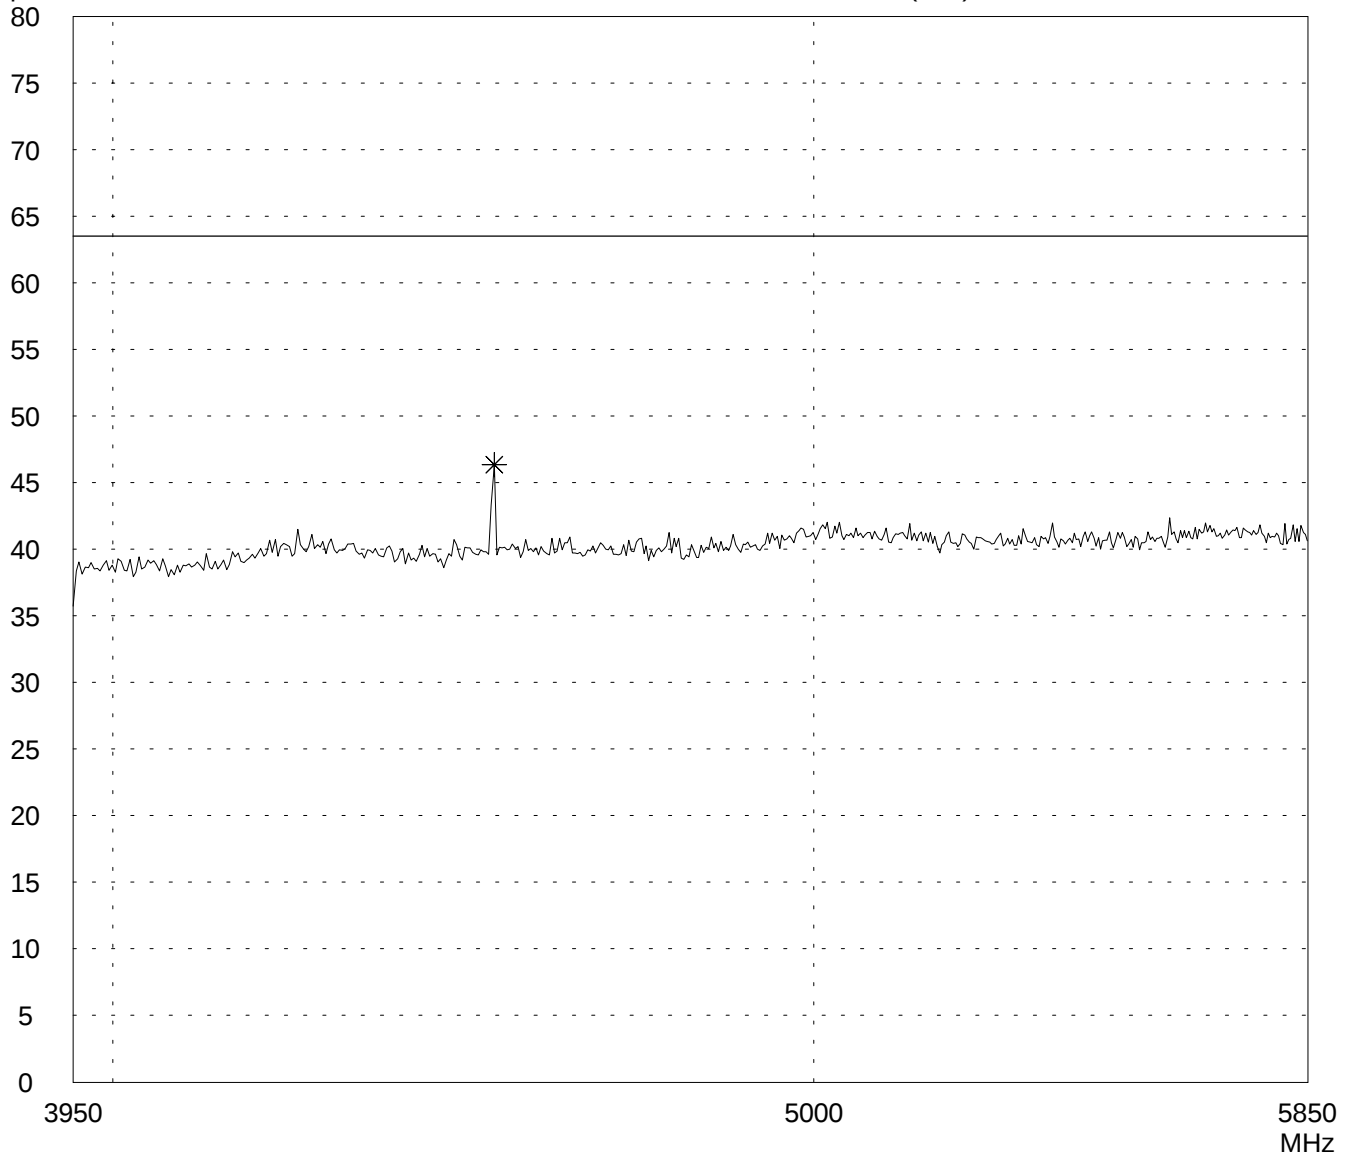

Result:
Limit kept

Project file:
58002-30555-2

Page of Pages

Radiated Emission Test 3.95 GHz - 5.85 GHz acc. to FCC Part 15 (EMCO 3160)

Model:
CELSIUS Mobil Unit

Serial no.:
US MB

Applicant:
A. J. Fonseca Lda.

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 1 meter
Vertical Polarization

Date of test: 09/25/2003 Operator: M. Steindl

Test performed: automatically File name: default.emi

Comment:
- EUT in upright position


- with WHKM3/13G-10SS high pass filter

Detector:
Peak

List of values:
Selected by hand

dB μ V/m

Limit1: FCC Part 15 (1 m) Transducer: EMCO 3160

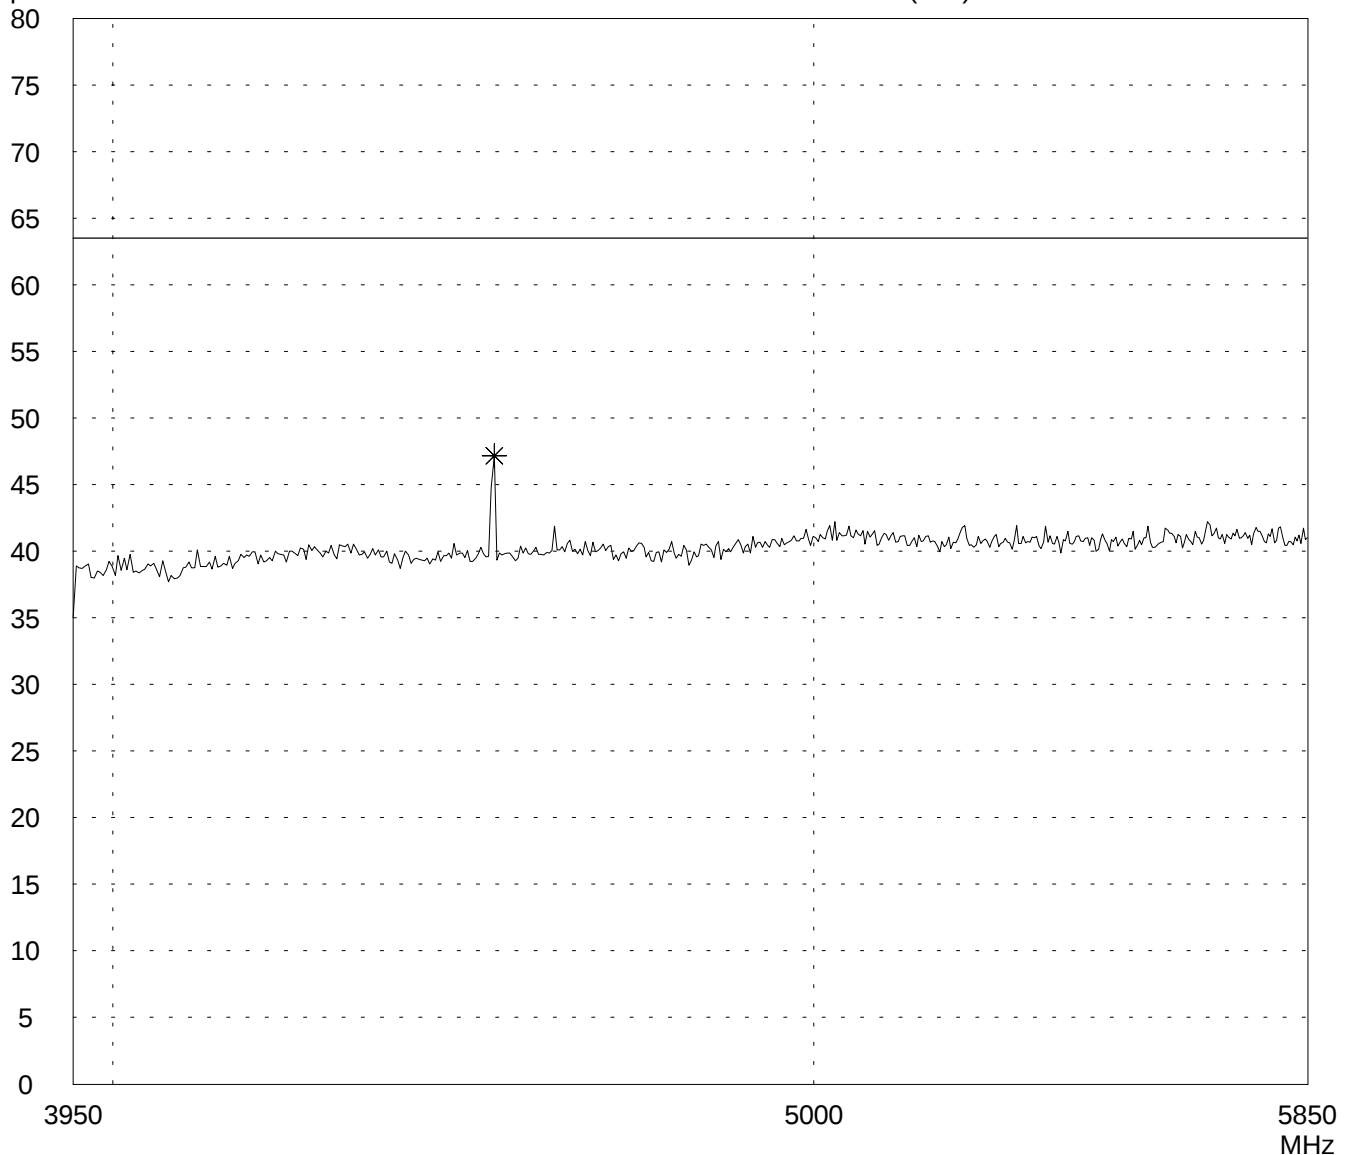

Result:
Limit kept

Project file:
58002-30555-2

Page of Pages

Radiated Emission Test 5.85 GHz - 8.2 GHz acc. to FCC Part 15 (EMCO 3160)

Model:
CELSIUS Mobil Unit

Serial no.:
US MB

Applicant:
A. J. Fonseca Lda.

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 1 meter
Horizontal Polarization

Date of test: 09/25/2003 Operator: M. Steindl

Test performed: automatically File name: default.emi

Comment:
- EUT flat on table


- with WHKM3/13G-10SS high pass filter

Detector:
Peak

List of values:
Selected by hand

dBμV/m

Limit1: FCC Part 15 (1 m) Transducer: EMCO 3160

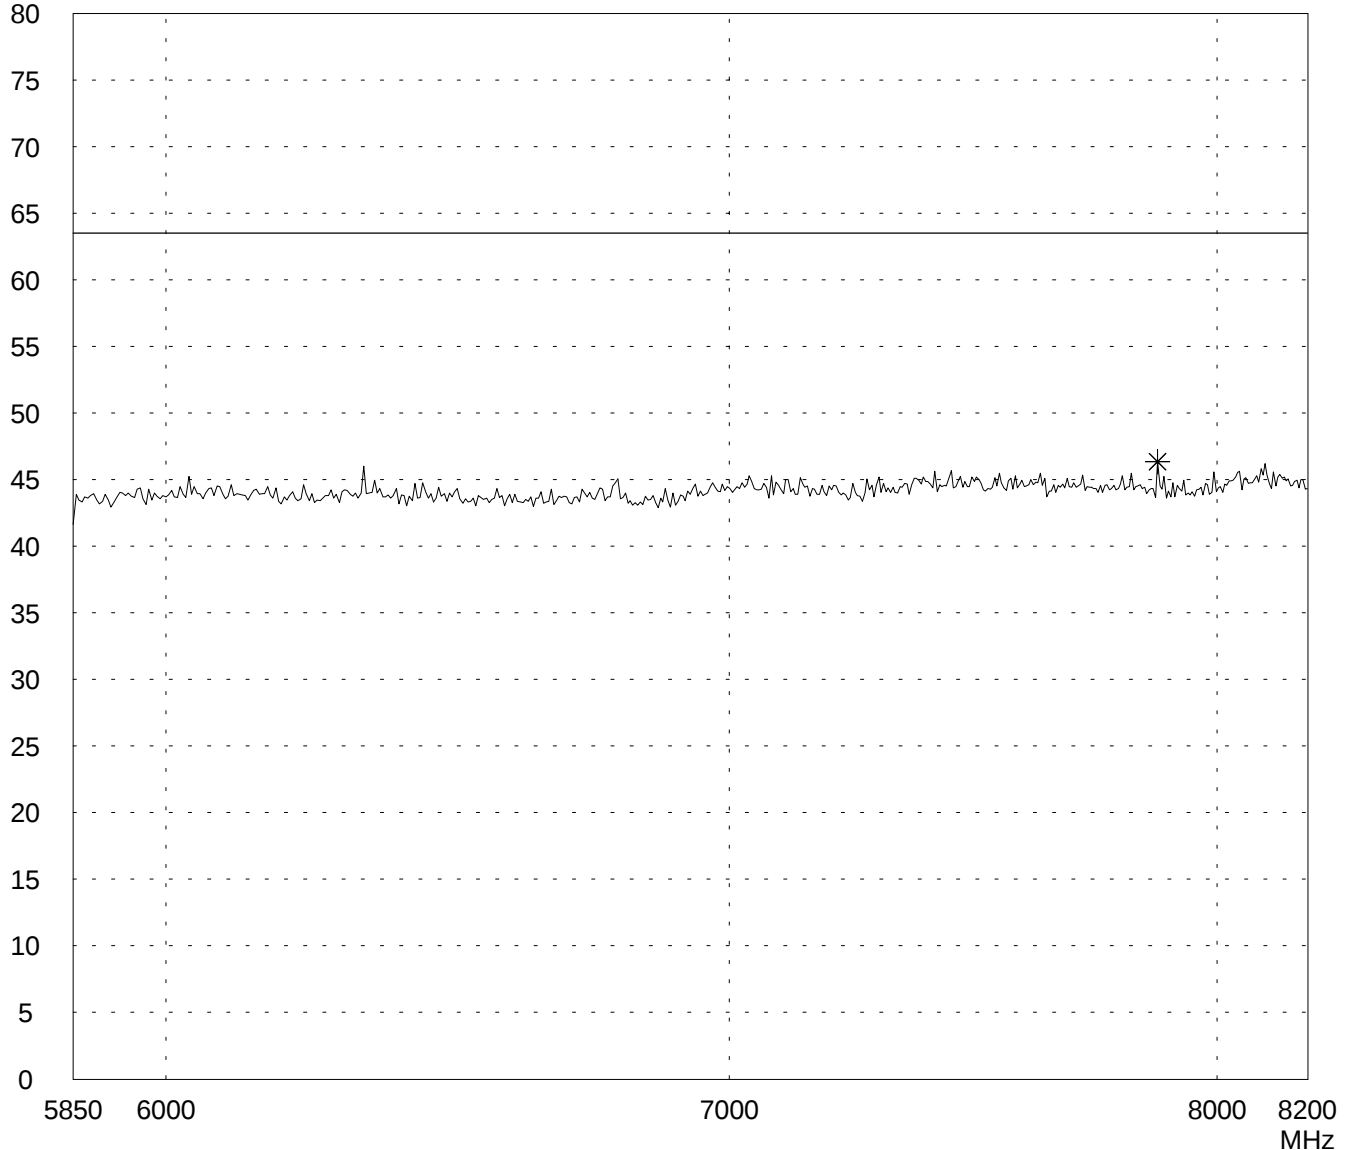

Result:
Limit kept

Project file: 58002-30555-2 Page of Pages

Radiated Emission Test 5.85 GHz - 8.2 GHz acc. to FCC Part 15 (EMCO 3160)

Model:
CELSIUS Mobil Unit

Serial no.:
US MB

Applicant:
A. J. Fonseca Lda.

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 1 meter
Vertical Polarization

Date of test: 09/25/2003 Operator: M. Steindl

Test performed: automatically File name: default.emi

Comment:
- EUT flat on table


- with WHKM3/13G-10SS high pass filter

Detector:
Peak

List of values:
Selected by hand

dBμV/m

Limit1: FCC Part 15 (1 m) Transducer: EMCO 3160

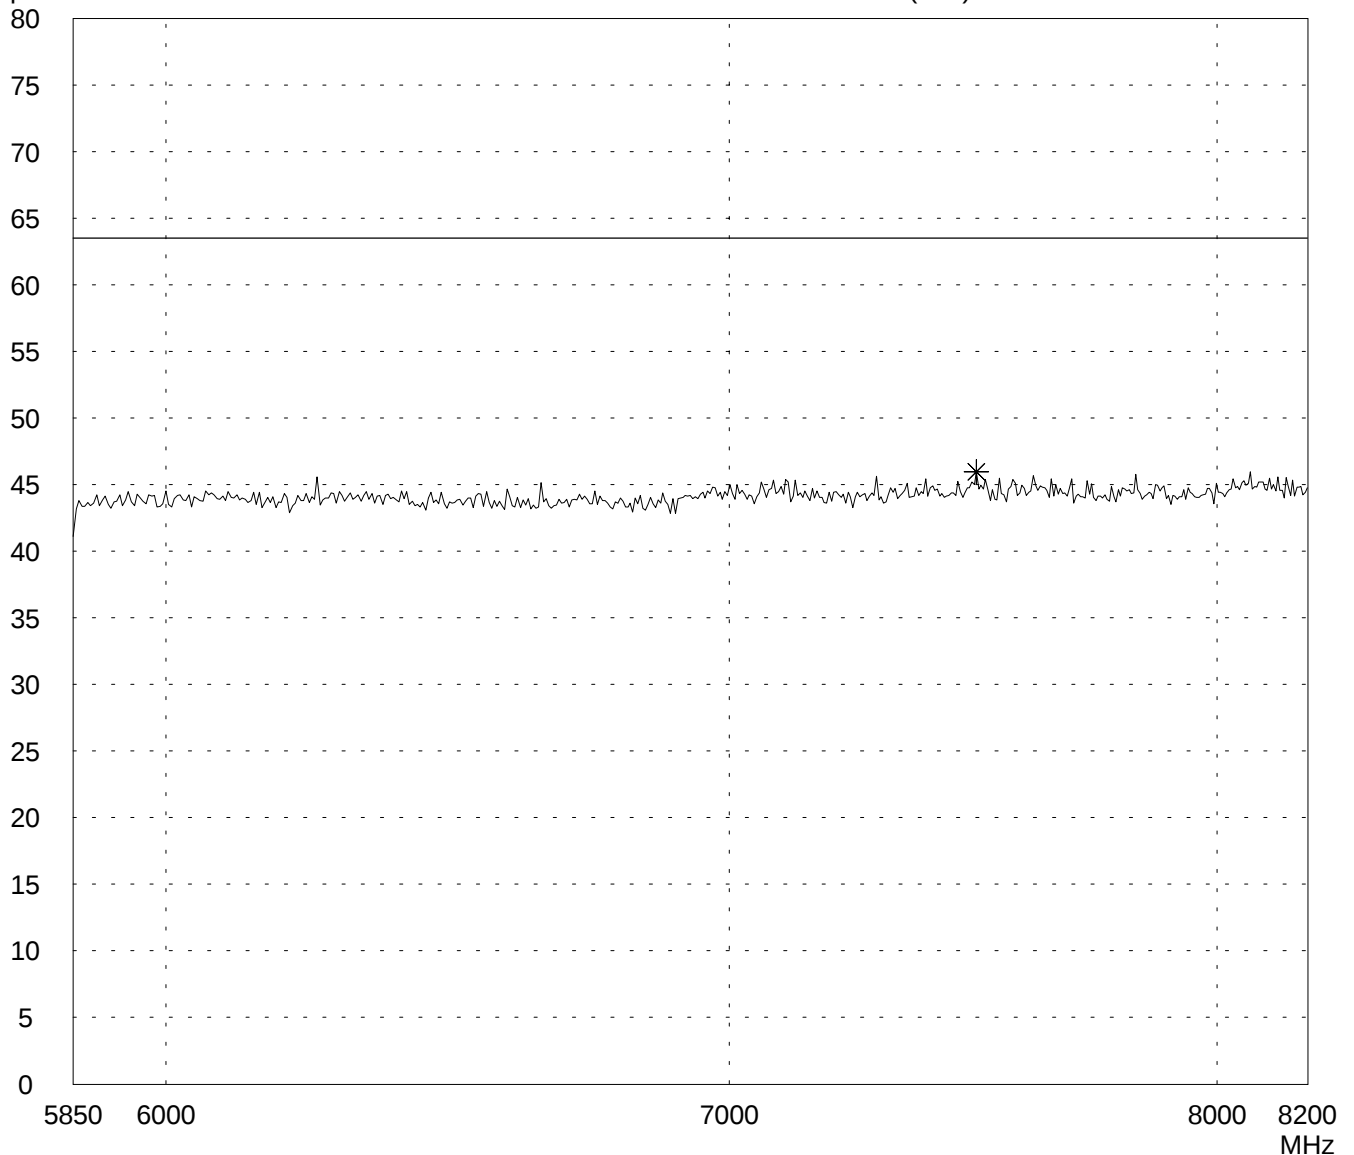

Result:
Limit kept

Project file:
58002-30555-2

Page of Pages

Radiated Emission Test 5.85 GHz - 8.2 GHz acc. to FCC Part 15 (EMCO 3160)

Model:
CELSIUS Mobil Unit

Serial no.:
US MB

Applicant:
A. J. Fonseca Lda.

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 1 meter
Horizontal Polarization

Date of test:
09/25/2003

Operator:
M. Steindl

Test performed:
automatically

File name:
default.emi

Comment:

- EUT on long side
- with WHKM3/13G-10SS high pass filter

Detector:
Peak


List of values:

10 dB Margin

50 Subranges

dB μ V/m

Limit1: FCC Part 15 (1 m) Transducer: EMCO 3160

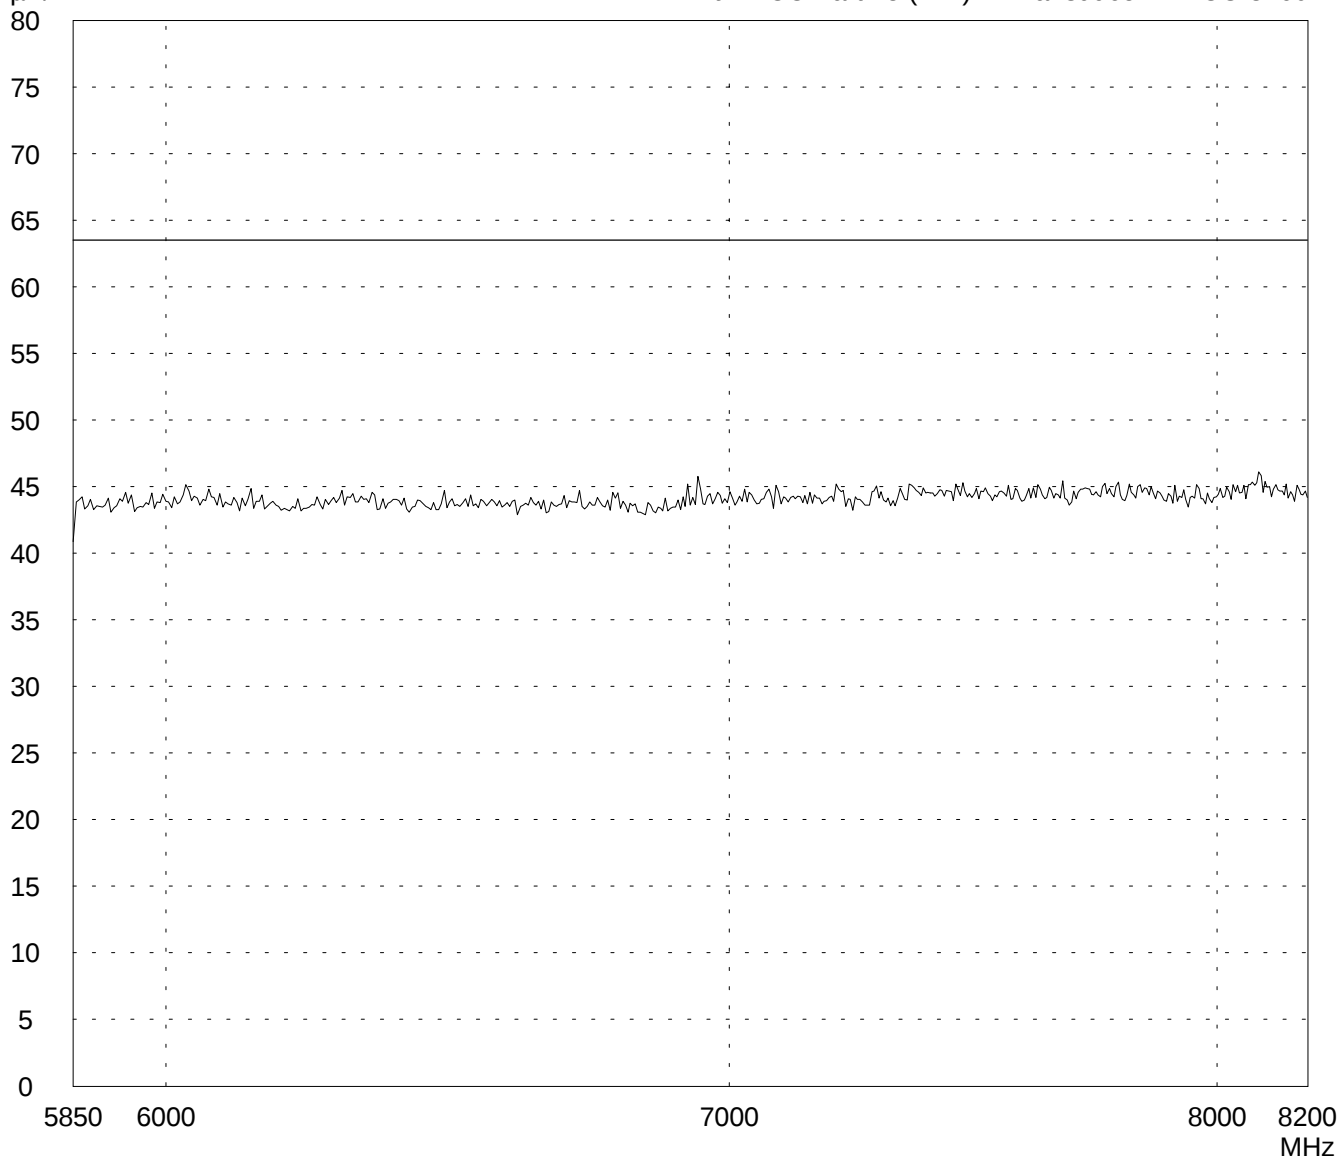

Result:
Limit kept

Project file:
58002-30555-2

Page of Pages

Radiated Emission Test 5.85 GHz - 8.2 GHz acc. to FCC Part 15 (EMCO 3160)

Model:
CELSIUS Mobil Unit

Serial no.:
US MB

Applicant:
A. J. Fonseca Lda.

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 1 meter
Vertical Polarization

Date of test: 09/25/2003 Operator: M. Steindl

Test performed: automatically File name: default.emi

Comment:
- EUT on long side


- with WHKM3/13G-10SS high pass filter

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

dBμV/m

Limit1: FCC Part 15 (1 m) Transducer: EMCO 3160

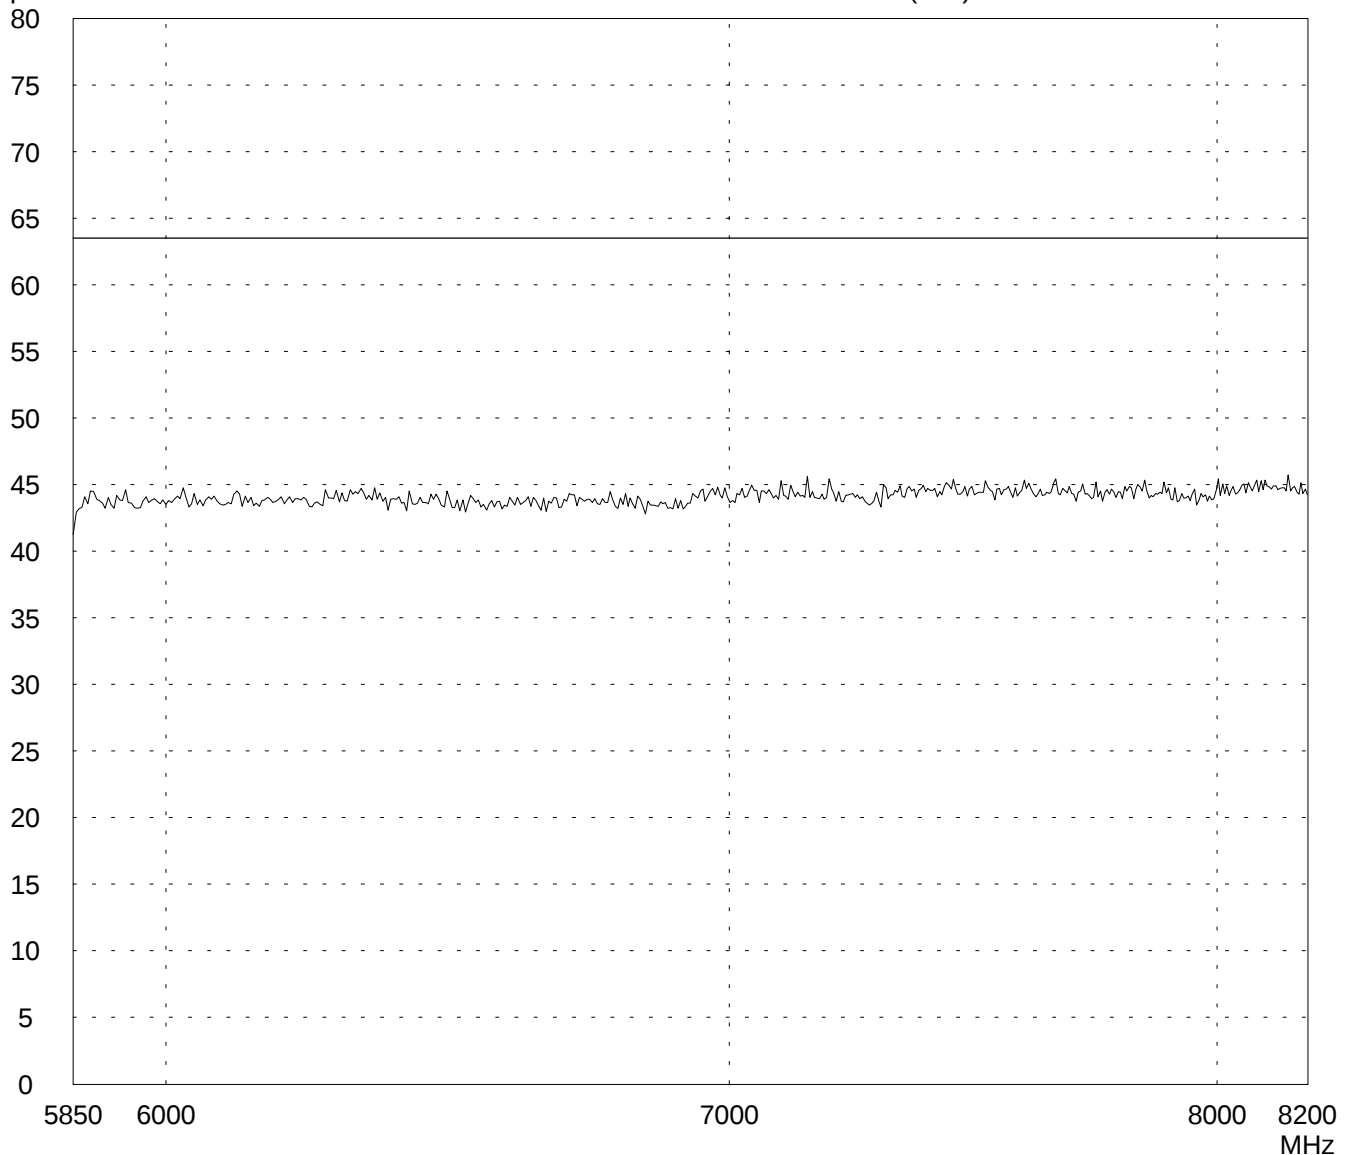

Result:
Limit kept

Project file:
58002-30555-2 Page of Pages

Radiated Emission Test 5.85 GHz - 8.2 GHz acc. to FCC Part 15 (EMCO 3160)

Model:
CELSIUS Mobil Unit

Serial no.:
US MB

Applicant:
A. J. Fonseca Lda.

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 1 meter
Horizontal Polarization

Date of test: 09/25/2003 Operator: M. Steindl

Test performed: automatically File name: default.emi

Comment:
- EUT in upright position


- with WHKM3/13G-10SS high pass filter

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

dBμV/m

Limit1: FCC Part 15 (1 m) Transducer: EMCO 3160

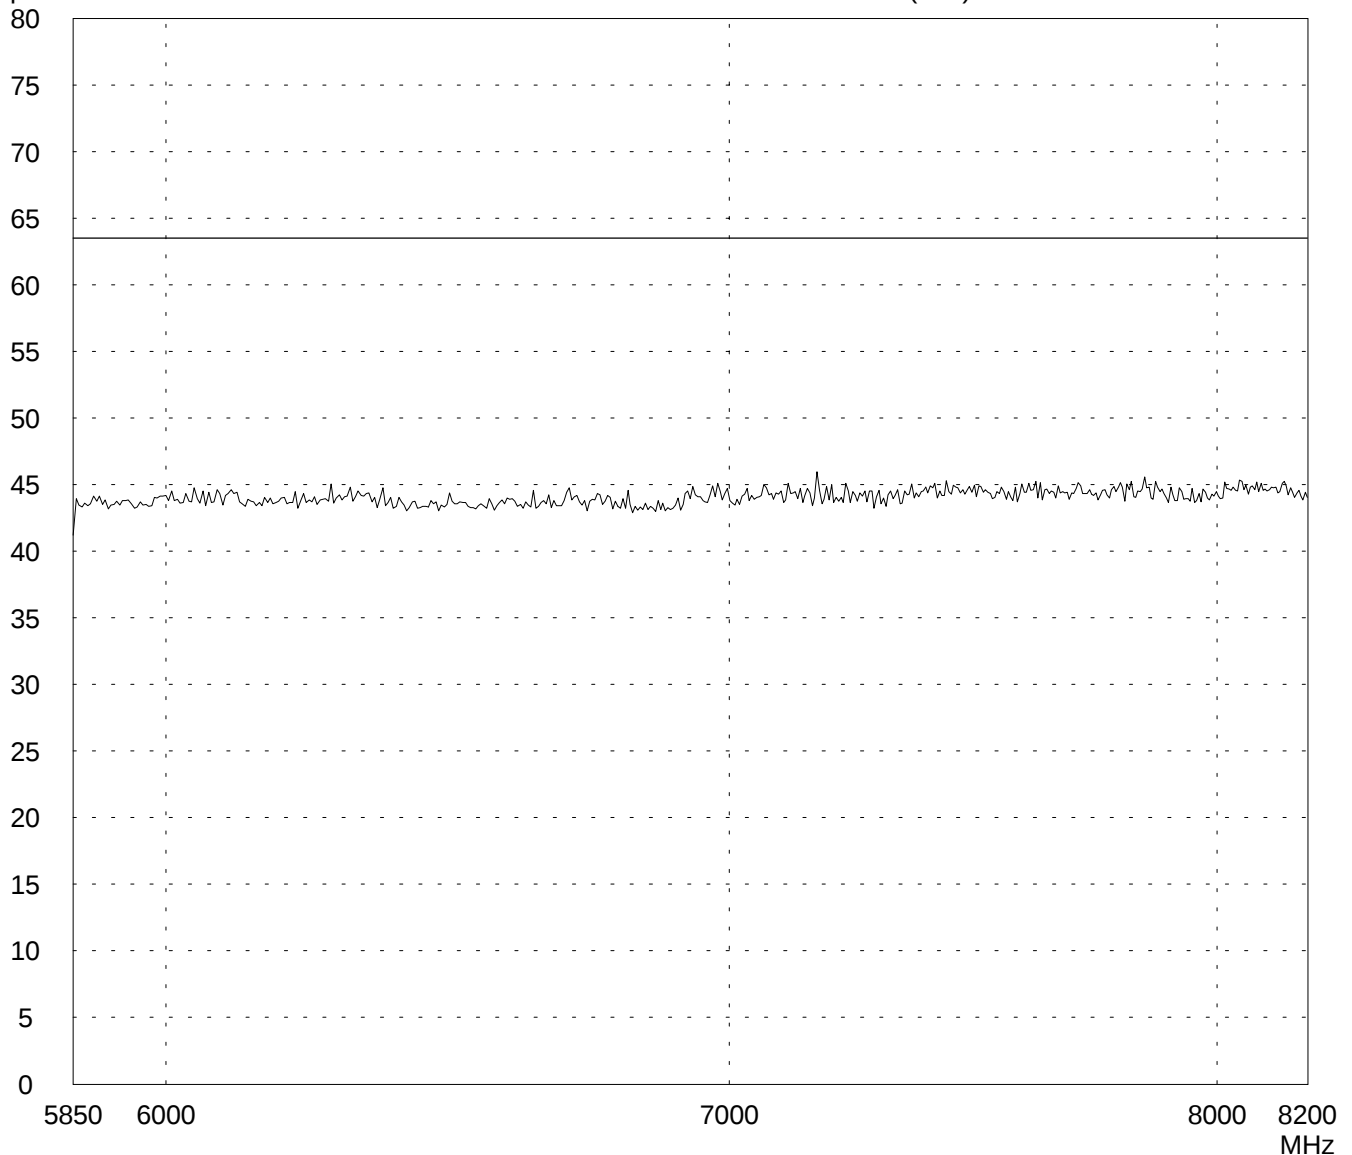

Result:
Limit kept

Project file:
58002-30555-2 Page of Pages

Radiated Emission Test 5.85 GHz - 8.2 GHz acc. to FCC Part 15 (EMCO 3160)

Model:
CELSIUS Mobil Unit

Serial no.:
US MB

Applicant:
A. J. Fonseca Lda.

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 1 meter
Vertical Polarization

Date of test: 09/25/2003 Operator: M. Steindl

Test performed: automatically File name: default.emi

Comment:
- EUT in upright position


- with WHKM3/13G-10SS high pass filter

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

dBμV/m

Limit1: FCC Part 15 (1 m) Transducer: EMCO 3160

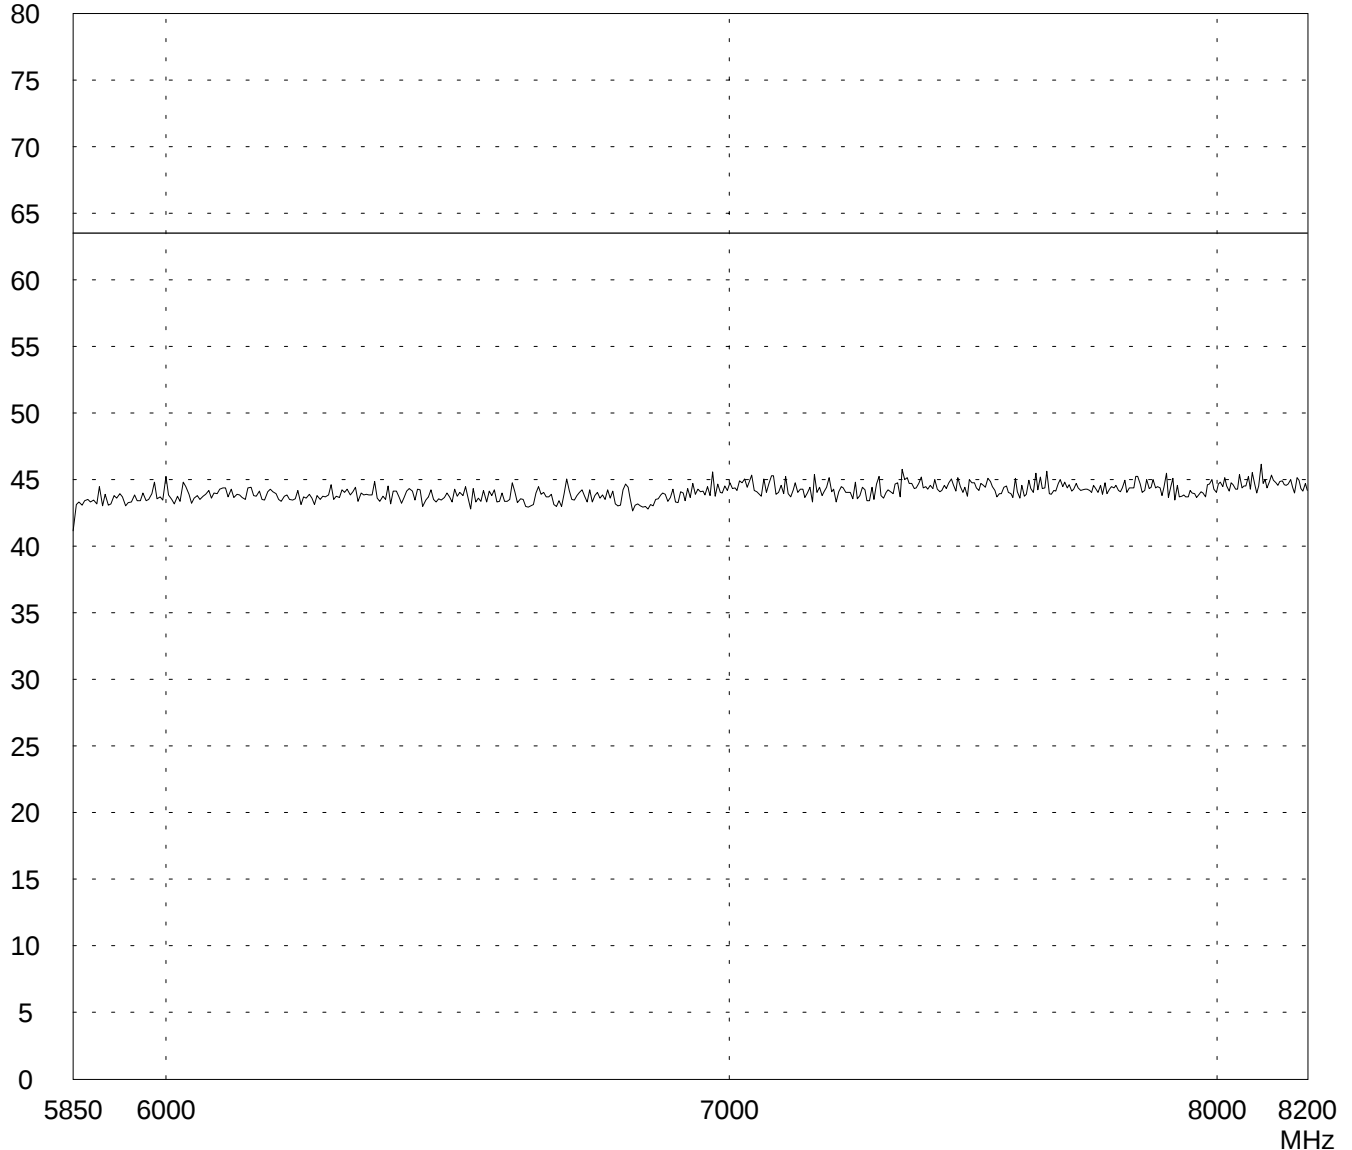

Result:
Limit kept

Project file:
58002-30555-2 Page of Pages

Radiated Emission Test 8.2 GHz - 12.4 GHz acc. to FCC Part 15 (EMCO 3160)

Model:
CELSIUS Mobil Unit

Serial no.:
US MB

Applicant:
A. J. Fonseca Lda.

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 1 meter
Horizontal Polarization

Date of test: 09/25/2003 Operator: M. Steindl

Test performed: automatically File name: default.emi

Comment:
- EUT flat on table


- with WHKM3/13G-10SS high pass filter

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

dB μ V/m

Limit1: FCC Part 15 (1 m) Transducer: EMCO 3160

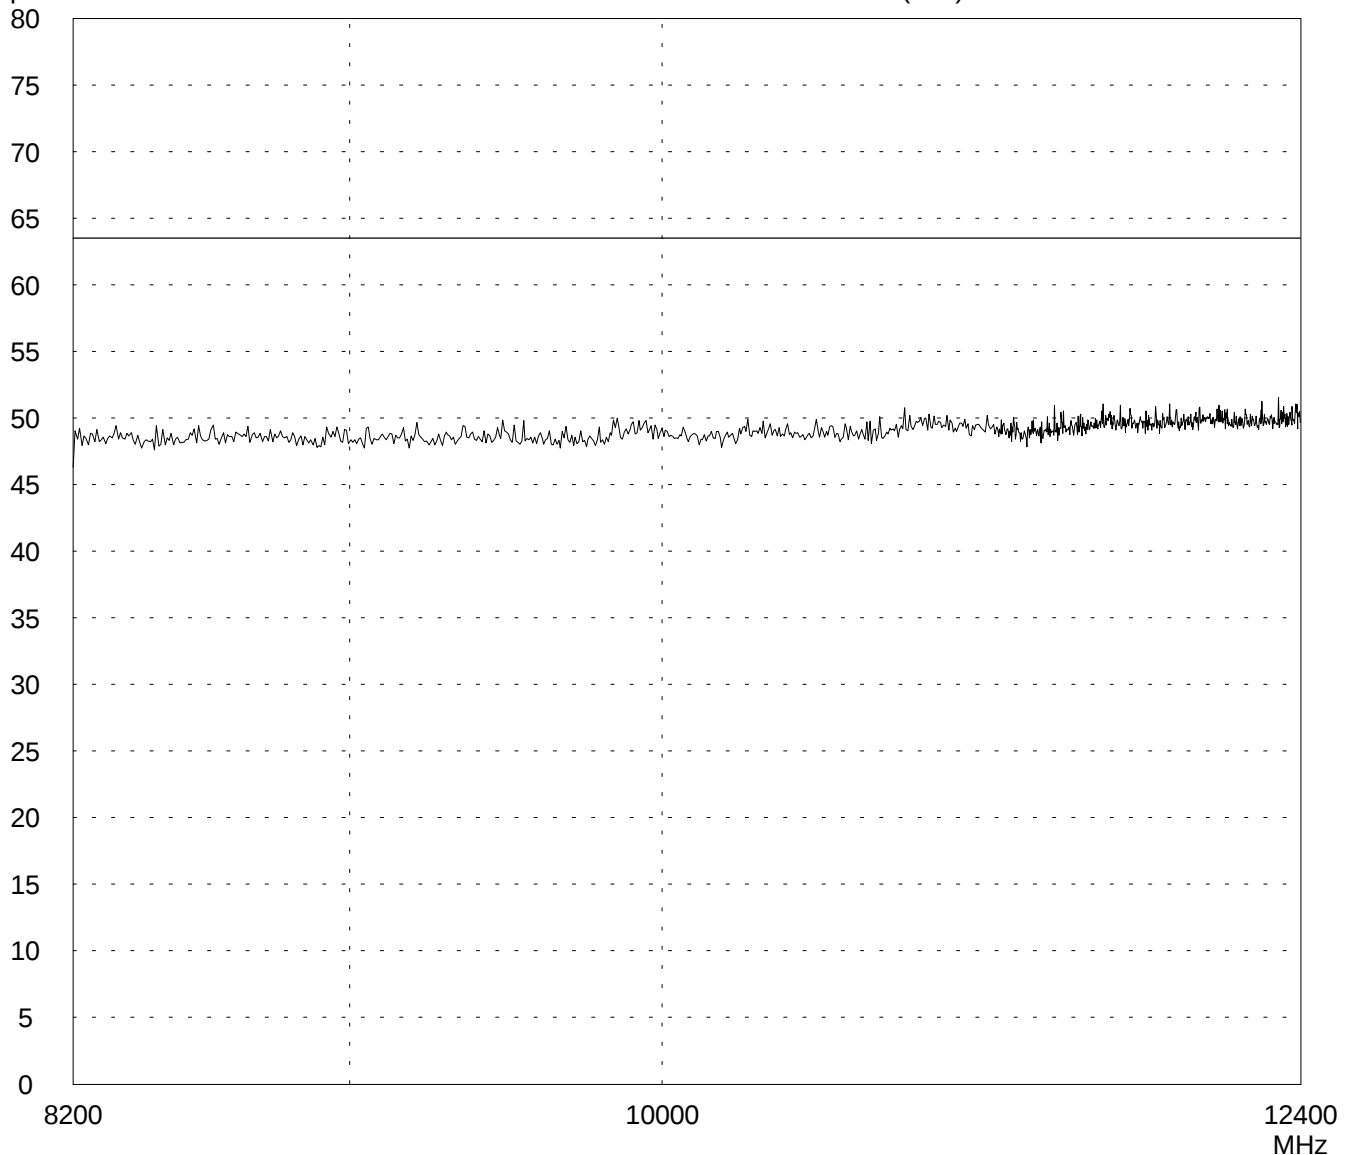

Result:
Limit kept

Project file:
58002-30555-2 Page of Pages

Radiated Emission Test 8.2 GHz - 12.4 GHz acc. to FCC Part 15 (EMCO 3160)

Model:
CELSIUS Mobil Unit

Serial no.:
US MB

Applicant:
A. J. Fonseca Lda.

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 1 meter
Vertical Polarization

Date of test: 09/25/2003 Operator: M. Steindl


Test performed: automatically File name: default.emi

Comment:
- EUT flat on table

- with WHKM3/13G-10SS high pass filter

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

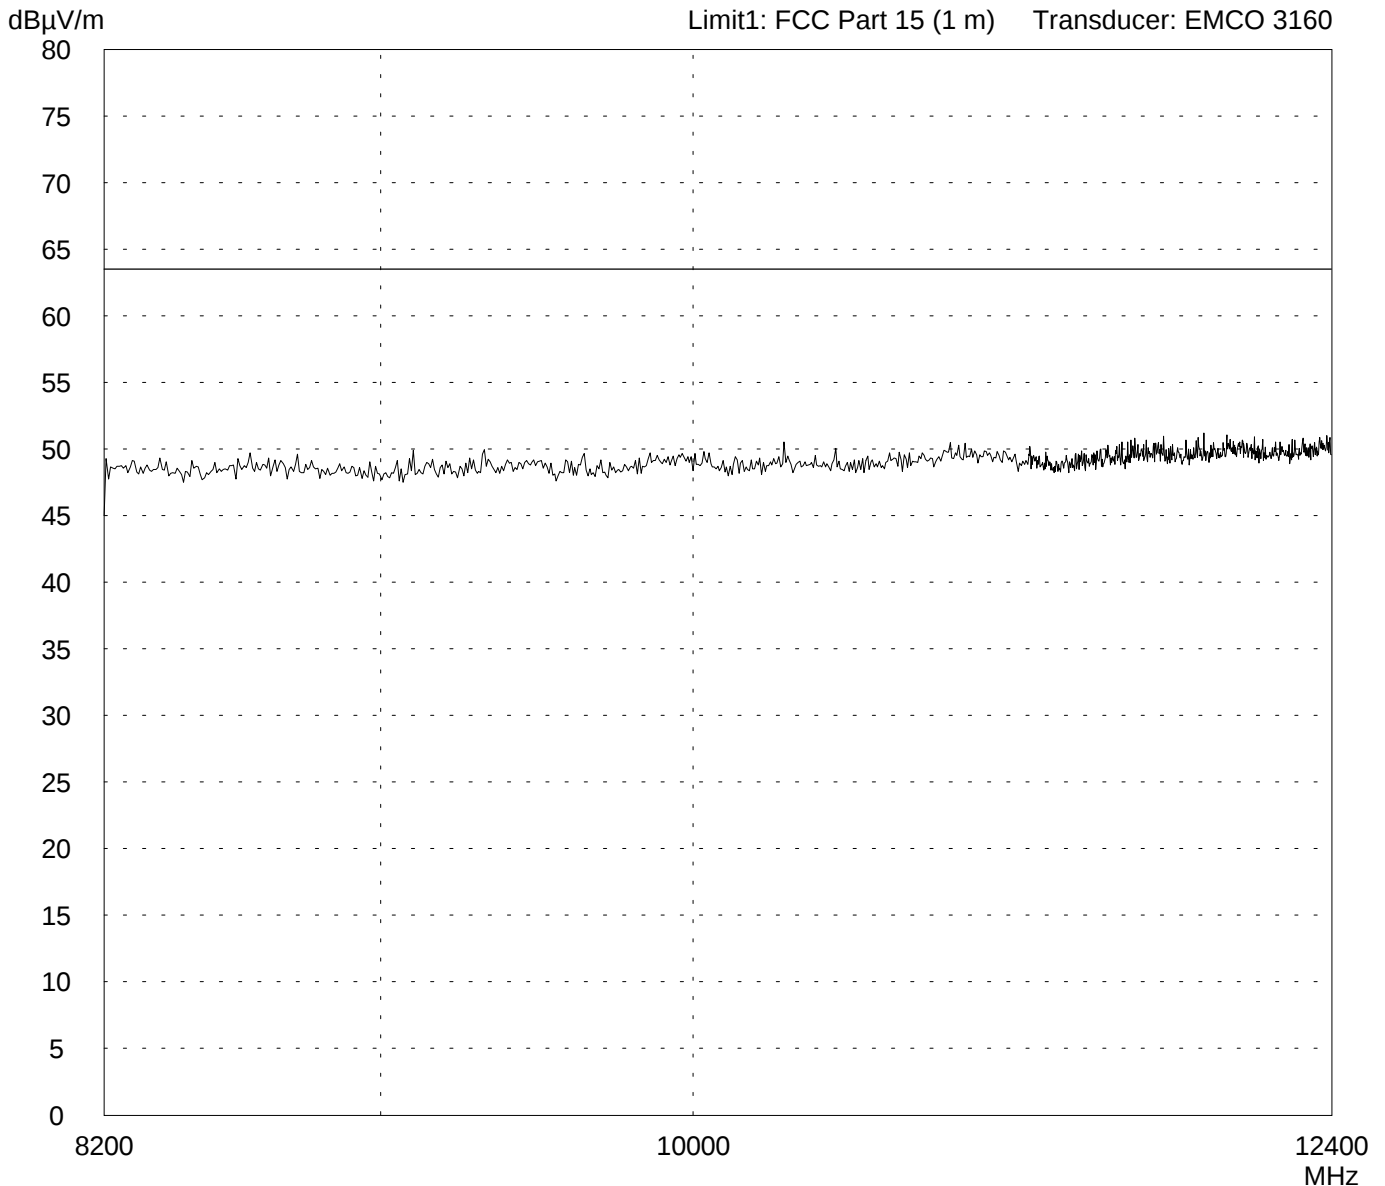

Result:
Limit kept

Project file:
58002-30555-2 Page of Pages

Radiated Emission Test 8.2 GHz - 12.4 GHz acc. to FCC Part 15 (EMCO 3160)

Model:
CELSIUS Mobil Unit

Serial no.:
US MB

Applicant:
A. J. Fonseca Lda.

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 1 meter
Horizontal Polarization

Date of test: 09/25/2003 Operator: M. Steindl

Test performed: automatically File name: default.emi

Comment:
- EUT on long side


- with WHKM3/13G-10SS high pass filter

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

dB μ V/m

Limit1: FCC Part 15 (1 m) Transducer: EMCO 3160

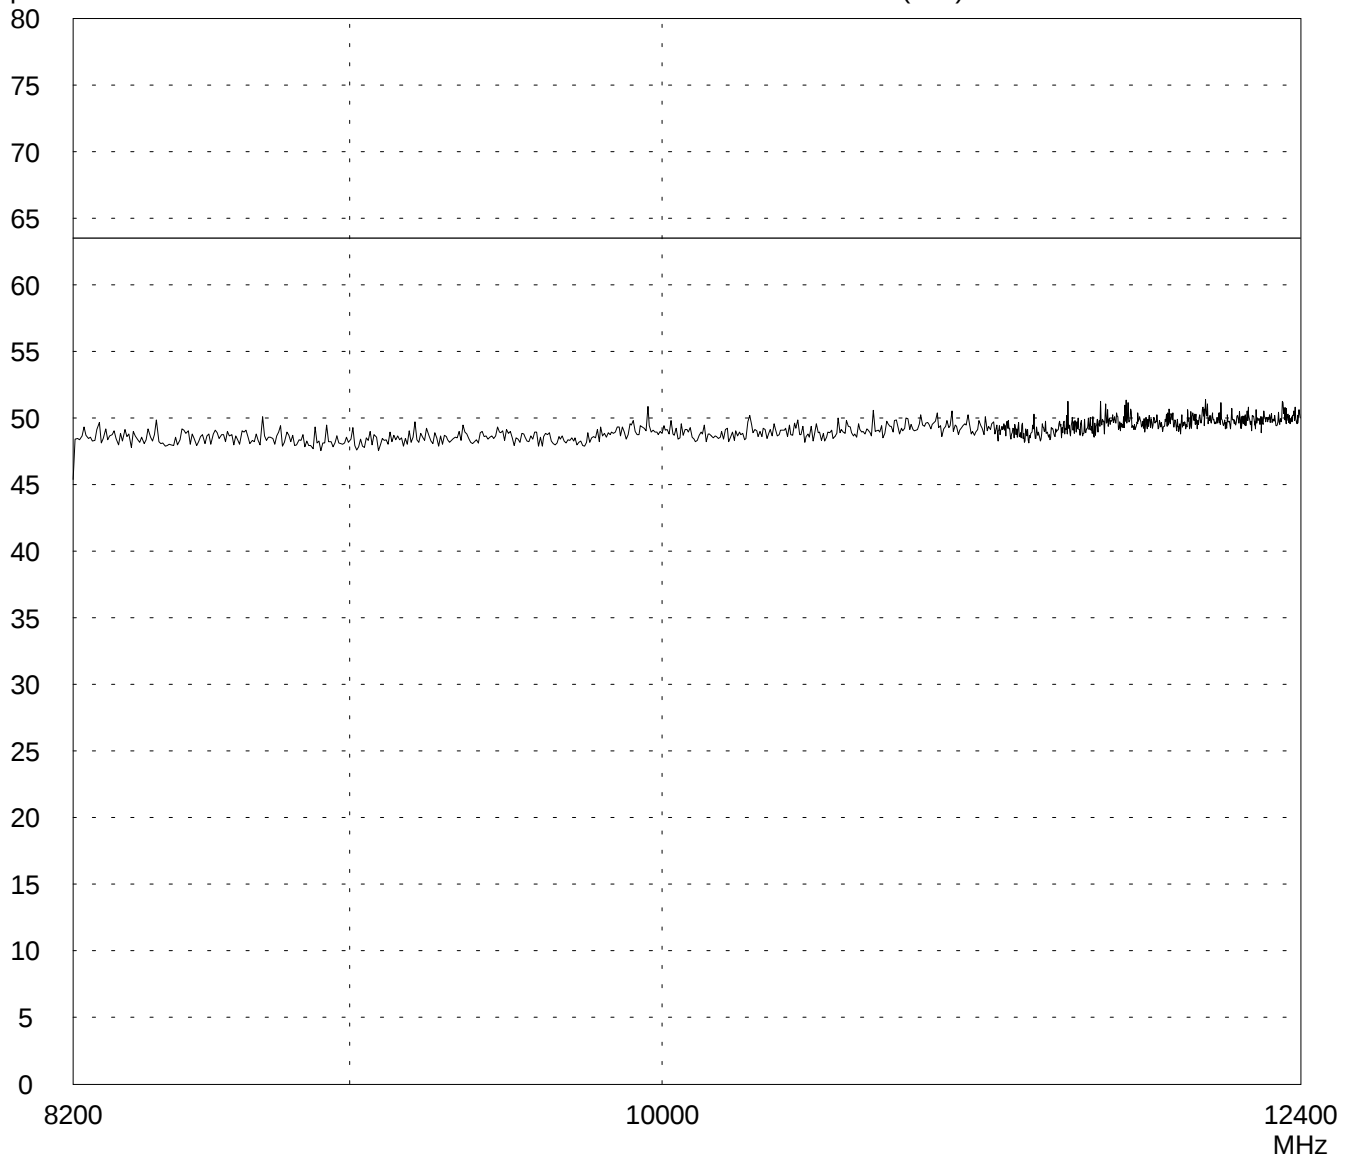

Result:
Limit kept

Project file: 58002-30555-2 Page of Pages

Radiated Emission Test 8.2 GHz - 12.4 GHz acc. to FCC Part 15 (EMCO 3160)

Model:
CELSIUS Mobil Unit

Serial no.:
US MB

Applicant:
A. J. Fonseca Lda.

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 1 meter
Vertical Polarization

Date of test: 09/25/2003 Operator: M. Steindl

Test performed: automatically File name: default.emi

Comment:
- EUT on long side


- with WHKM3/13G-10SS high pass filter

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

dB μ V/m

Limit1: FCC Part 15 (1 m) Transducer: EMCO 3160

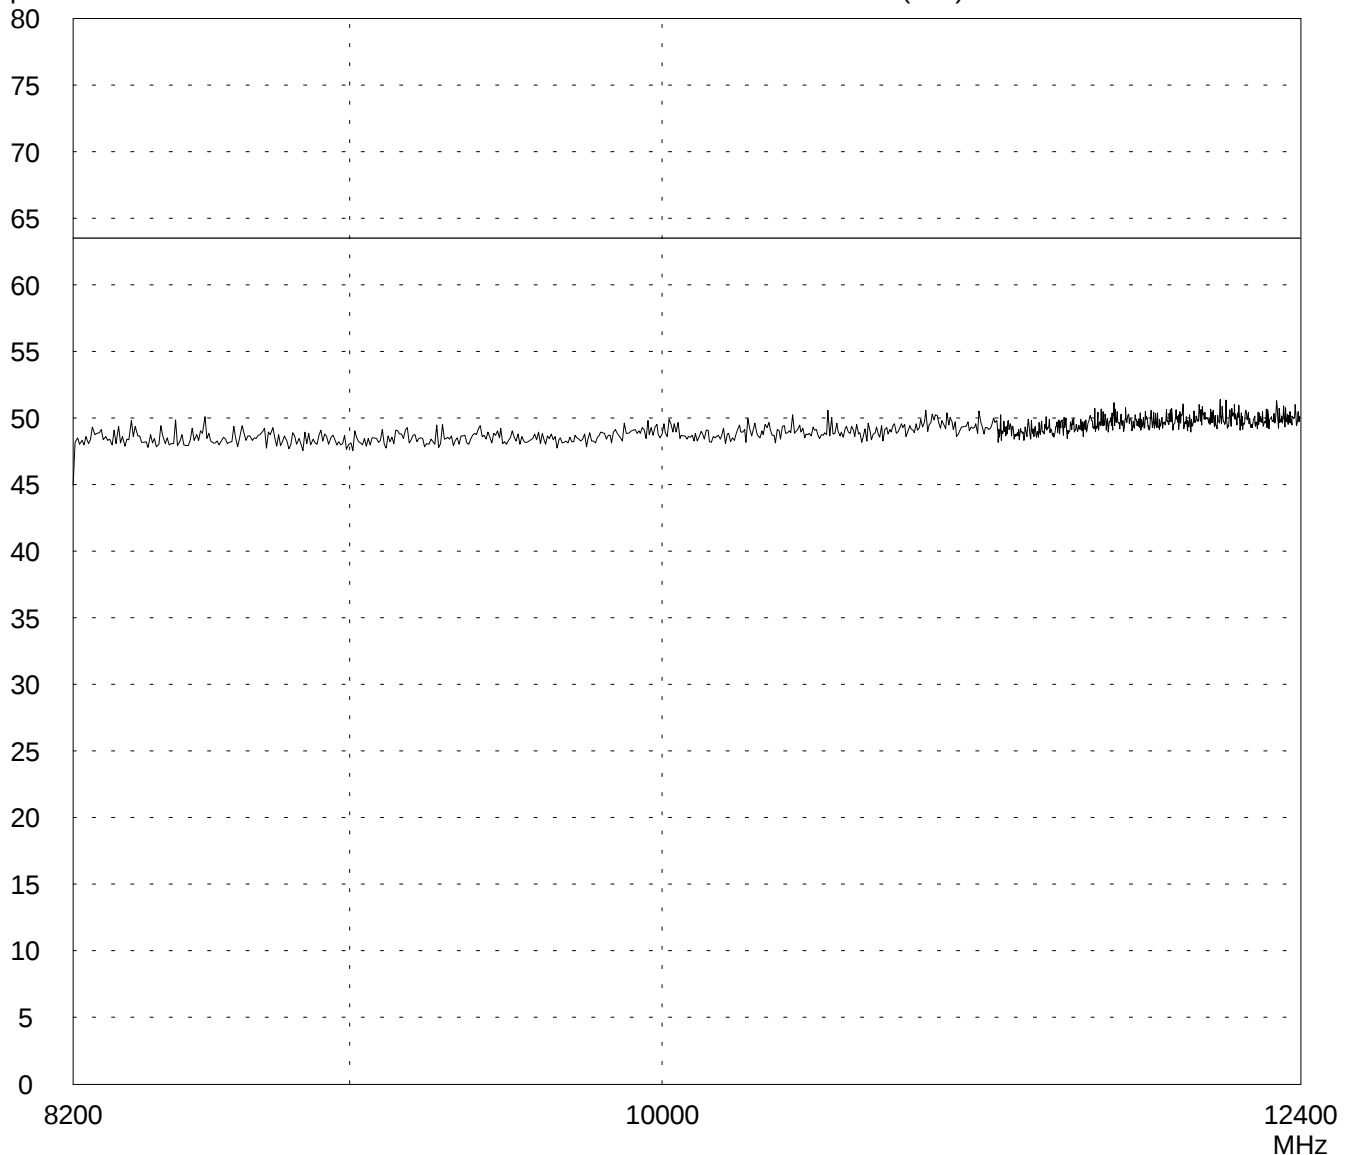

Result:
Limit kept

Project file:
58002-30555-2 Page of Pages

Radiated Emission Test 8.2 GHz - 12.4 GHz acc. to FCC Part 15 (EMCO 3160)

Model:
CELSIUS Mobil Unit

Serial no.:
US MB

Applicant:
A. J. Fonseca Lda.

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 1 meter
Horizontal Polarization

Date of test: 09/25/2003 Operator: M. Steindl

Test performed: automatically File name: default.emi

Comment:
- EUT in upright position


- with WHKM3/13G-10SS high pass filter

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

$\text{dB}\mu\text{V/m}$

Limit1: FCC Part 15 (1 m) Transducer: EMCO 3160

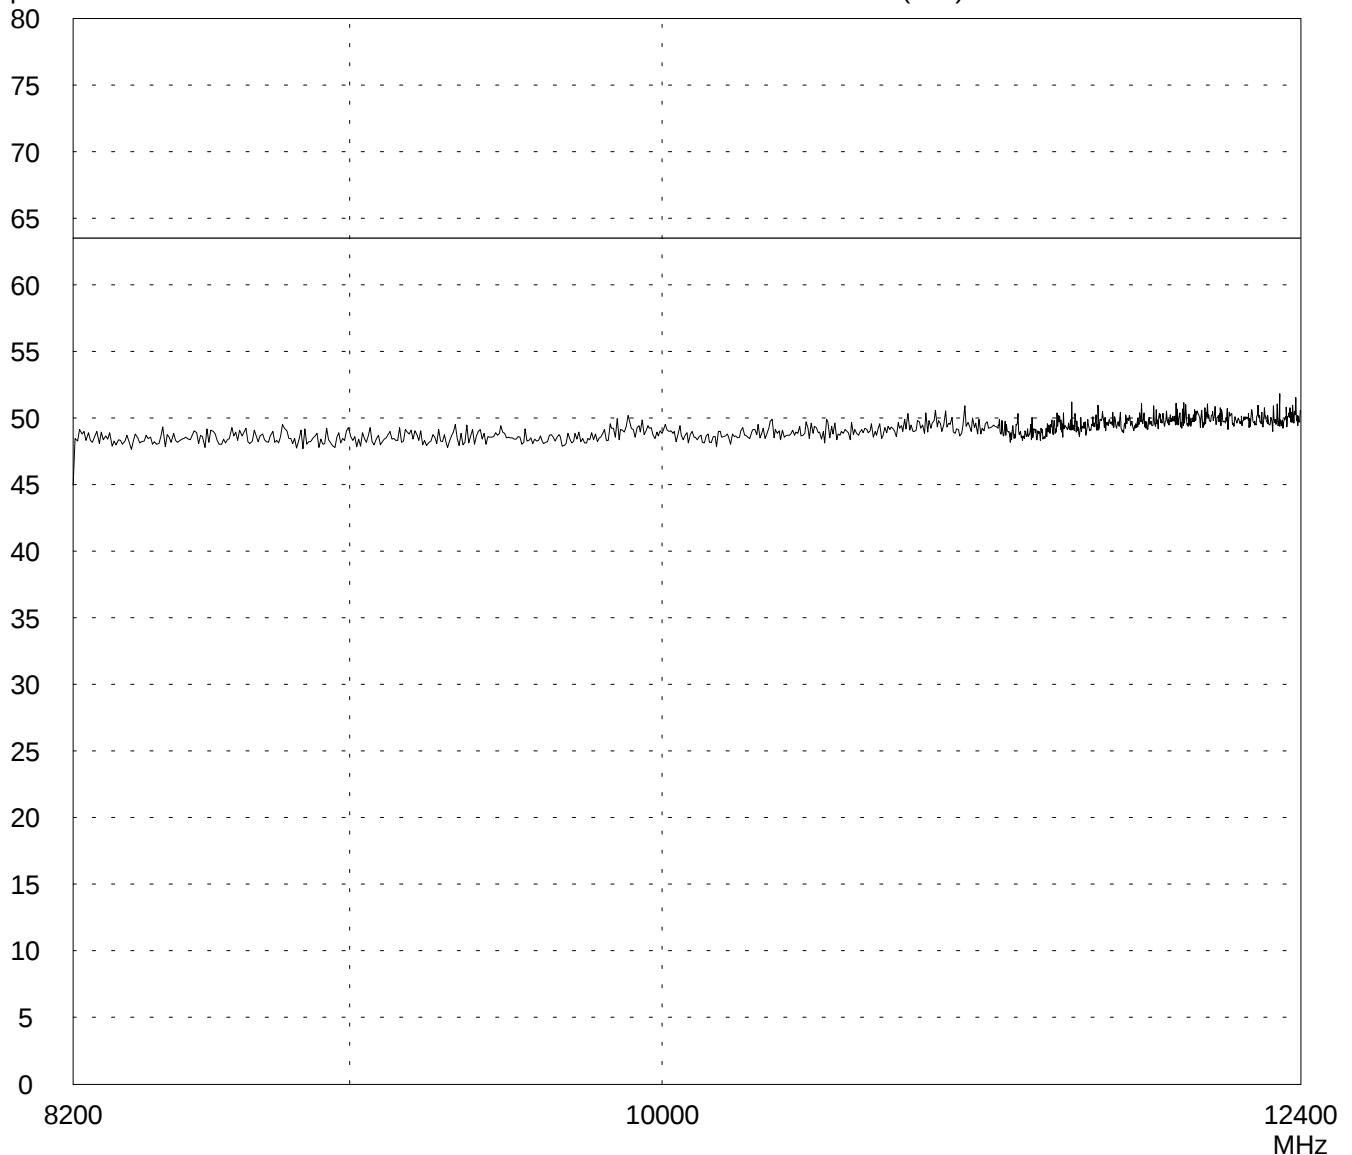

Result:
Limit kept

Project file: 58002-30555-2 Page of Pages