

Test of Wistron 802.11 a/b/g/n Wireless Module

To: FCC 47 CFR Part 15.407 & IC RSS-210

Test Report Serial No.: HPWD11-U2 Rev A



# TEST REPORT

FROM



Test of Wistron 802.11 a/b/g/n Wireless Module  
to

To: FCC 47 CFR Part 15.407 & IC RSS-210

Class II Permissive Change, FCC ID: RTP-DNMA83

Additional Antenna DFS Bands Only

Test Report Serial No.: HPWD11-U2 Rev A

This report supersedes NONE

Applicant: Hewlett Packard  
200 Forest Street MR01-2/M18  
Marlborough  
Massachusetts 01752-3085 , USA

Product Function: Access Point

Copy No: pdf Issue Date: 25th November 2009

**This Test Report is Issued Under the Authority of:**

**MiCOM Labs, Inc.**  
440 Boulder Court, Suite 200  
Pleasanton, CA 94566 USA  
Phone: +1 (925) 462-0304  
Fax: +1 (925) 462-0306  
[www.micomlabs.com](http://www.micomlabs.com)



CERTIFICATE #2381.01

**MiCOM Labs is an ISO 17025 Accredited Testing Laboratory**



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 3 of 68

---

This page has been left intentionally blank



## TABLE OF CONTENTS

**ACCREDITATION, LISTINGS & RECOGNITION ..... 5**

**1. TEST RESULT CERTIFICATE ..... 8**

**2. REFERENCES AND MEASUREMENT UNCERTAINTY ..... 9**

    2.1. Normative References ..... 9

    2.2. Test and Uncertainty Procedures ..... 10

**3. PRODUCT DETAILS AND TEST CONFIGURATIONS ..... 11**

    3.1. Technical Details ..... 11

    3.2. Scope of Test Program ..... 12

    3.3. Equipment Model(s) and Serial Number(s) ..... 17

    3.4. Antenna Details ..... 17

    3.5. Cabling and I/O Ports ..... 17

    3.6. Test Configurations ..... 18

    3.7. Equipment Modifications ..... 19

    3.8. Deviations from the Test Standard ..... 19

    3.9. Subcontracted Testing or Third Party Data ..... 19

**4. TEST SUMMARY ..... 20**

**5. TEST RESULTS ..... 21**

    5.1. Device Characteristics ..... 21

        5.1.1. *Band-Edge 5600 – 5650 MHz (15.407)* ..... 21

        5.1.2. *Radiated Emissions (15.407, RSS-210)* ..... 31

**6. PHOTOGRAPHS ..... 65**

    6.1. Radiated Emissions > 1GHz ..... 65

**7. TEST EQUIPMENT DETAILS ..... 67**

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 5 of 68

## ACCREDITATION, LISTINGS & RECOGNITION

MiCOM Labs, Inc. an accredited laboratory complies with the international standard BS EN ISO/IEC 17025. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



The American Association for Laboratory Accreditation

World Class Accreditation

### Accredited Laboratory

A2LA has accredited

**MICOM LABS**

*Pleasanton, CA*

for technical competence in the field of

**Electrical Testing**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 *General Requirements for the Competence of Testing and Calibration Laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-LAF Communiqué dated 8 January 2009).

Presented this 26th day of February 2008.



President & CEO  
For the Accreditation Council  
Certificate Number 2381.01  
Valid to February 28, 2010  
Revised November 17, 2009

*For the tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.*

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## LISTINGS

MiCOM Labs test facilities are listed by the following organizations;

### North America

#### **United States of America**

Federal Communications Commission (FCC) Listing #: 102167

#### **Canada**

Industry Canada (IC) Listing #:4143A-2

### Japan Registration

VCCI Membership Number: 2959

- Radiation 3 meter site; Registration No. R-2881
- Line Conducted, Registration Nos. C-3181 & T-1470
- Emissions; Registration Nos. C-3180 & T-1469

## RECOGNITION

### **APEC MRA (Asia-Pacific Economic Community Mutual Recognition Agreement)**

#### **Conformity Assessment Body (CAB) – MiCOM Labs**

Test data generated by MiCOM Labs is accepted in the following countries under the APEC MRA.

Country	Recognition Body	Phase	CAB Identification No.
Australia	Australian Communications and Media Authority (ACMA)	I	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	I	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	I	
Singapore	Infocomm Development Authority (IDA)	I	
Taiwan	Directorate General of Telecommunications (DGT) Bureau of Standards, Metrology and Inspection (BSMI)	I	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 7 of 68

---

## DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft		
Rev A	25 <sup>th</sup> November '09	Initial Release

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 8 of 68

## 1. TEST RESULT CERTIFICATE

<b>Applicant:</b>	Hewlett Packard 200 Forest Street MR01-2/M18 Marlborough Massachusetts 01752-3085 , USA	<b>Tested By:</b>	MiCOM Labs, Inc. 440 Boulder Court Suite 200 Pleasanton California, 94566, USA
<b>EUT:</b>	Wireless Access Card	<b>Telephone:</b>	+1 925 462 0304
<b>Model:</b>	Wistron DNMA-83	<b>Fax:</b>	+1 925 462 0306
<b>S/N:</b>	D027814A010EC01		
<b>Test Date(s):</b>	22nd Dec '08 to 2nd Jan '09 & 16th Nov '09	<b>Website:</b>	www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC 47 CFR Part 15.407 & IC RSS-210  Radiated Testing of Additional Integral Antenna (Laird Technologies SM24513P)	EQUIPMENT COMPLIES


MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

### Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:

  
 \_\_\_\_\_  
 Graeme Grieve  
 Quality Manager MiCOM Labs,

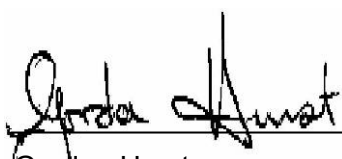  
 \_\_\_\_\_  
 Gordon Hurst  
 President & CEO MiCOM Labs, Inc.



CERTIFICATE #2381.01

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





## 2. REFERENCES AND MEASUREMENT UNCERTAINTY

### 2.1. Normative References

Ref.	Publication	Year	Title
(i)	FCC 47 CFR Part Sub-Part C 15.247 Sub-Part E 15.407	2007	Code of Federal Regulations
(ii)	FCC 06-96	June 2006	Memorandum Opinion and Order
(iii)	Industry Canada RSS-210	Issue 7 June 2007	Low Power License-Exempt Radiocommunication Devices (All Frequency Bands): Category 1 Equipment
(iv)	Industry Canada RSS-Gen	Issue 2 June 2007	General Requirements and Information for the Certification of Radiocommunication Equipment
(v)	ANSI C63.4	2003	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
(vi)	CISPR 22/ EN 55022	1997 1998	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
(vii)	M 3003	Edition 1 Dec. 1997	Expression of Uncertainty and Confidence in Measurements
(viii)	LAB34	Edition 1 Aug 2002	The expression of uncertainty in EMC Testing
(ix)	ETSI TR 100 028	2001	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
(x)	A2LA	14 <sup>th</sup> September 2005	Reference to A2LA Accreditation Status – A2LA Advertising Policy
(xi)	FCC Public Notice – DA 02-2138	2002	Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 10 of 68

---

## **2.2. Test and Uncertainty Procedures**

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 11 of 68

### 3. PRODUCT DETAILS AND TEST CONFIGURATIONS

#### 3.1. Technical Details

Details	Description
Purpose:	Test of the Wistron 802.11 a/b/g/n Wireless Module in the frequency ranges 2,400 – 2,483.5, 5150 – 5350, 5470 – 5725 and 5725 – 5,850 MHz to FCC Part(s) 15.247, 15.407 and Industry Canada RSS-210 regulations.
Applicant:	Hewlett Packard 200 Forest Street MR01-2/M18 Marlborough Massachusetts 01752-3085 , USA
Manufacturer:	Winstron NEWEB Corp
Laboratory performing the tests:	MiCOM Labs, Inc. 440 Boulder Court, Suite 200 Pleasanton, California 94566 USA
FCC ID:	RTP-DNMA83
IC ID:	4891A-DNMA83
Test report reference number:	HPWD11-U2 Rev A
Date EUT received:	20 <sup>th</sup> December 2008
Standard(s) applied:	FCC 47 CFR Part 15.407 & IC RSS-210
Dates of test (from - to):	23 <sup>rd</sup> to 24 <sup>th</sup> December 2008
No of Units Tested:	1
Type of Equipment:	802.11a/b/g/n Wireless Access Card, 3x3 Spatial Multiplexing MIMO configuration
Applicants Trade Name:	WLAN a+b+g+n mini-PCI Module
Model(s):	DNMA-83
Software Release	5.3
Hardware Release:	-030
Declared Frequency Range(s):	5,250 to 5,350 MHz 5,470 to 5,725 MHz
Type of Modulation:	Per 802.11 – OFDM
Declared Nominal Output Power: (Average Power)	802.11a: Legacy +18 dBm 802.11n: HT-20 +18 dBm 802.11n: HT-40 +17 dBm
Maximum observed output power	5260 – 5320 = +18.8 dBm (0.0759 W) 5500 – 5700 = +19.3 dBm (0.0851 W)
EUT Modes of Operation:	Legacy 802.11a/b/g, 802.11n HT-20, HT-40
Transmit/Receive Operation:	Time Division Duplex
Rated Input Voltage and Current:	Power Supply 3.3 Vdc @ 1 A
Operating Temperature Range:	Declared range 0 to +40°C
ITU Emission Designator:	802.11a Legacy 16M9W7D 802.11n HT-20 18M1W7D 802.11n HT-40 37M3W7D
Frequency Stability:	±20 ppm max
Equipment Dimensions:	2.5" x 2.5"
Weight:	2oz
Primary function of equipment:	Wireless Access Point

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 12 of 68

---

### **3.2. Scope of Test Program**

#### **RF Testing**

The scope of the compliance program was to test an additional antenna for the Wistron 802.11 a/b/g/n wireless module, 3x3 Spatial Multiplexing MIMO configurations in the frequency ranges 5,250 – 5,350 and 5470 – 5725 for compliance against FCC 47 CFR Part 15.407 specifications.

The antenna tested is detailed in section 3.4 “Antenna Details”.


#### **Identification**

FCC ID: RTP-DNMA83  
IC ID: 4891A-DNMA83

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


### Laird Technologies SM24513P MIMO Antenna

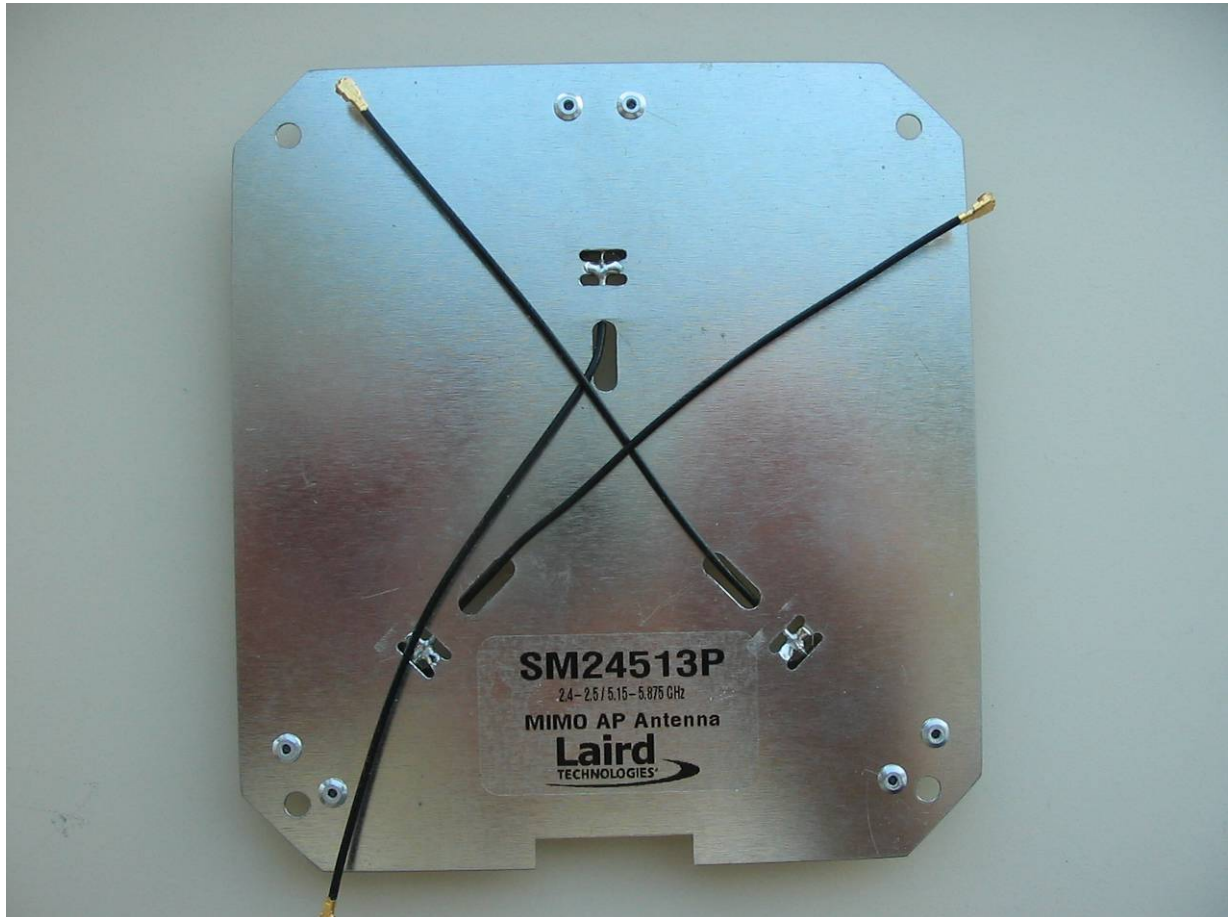

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


### Laird Technologies SM24513P MIMO Antenna

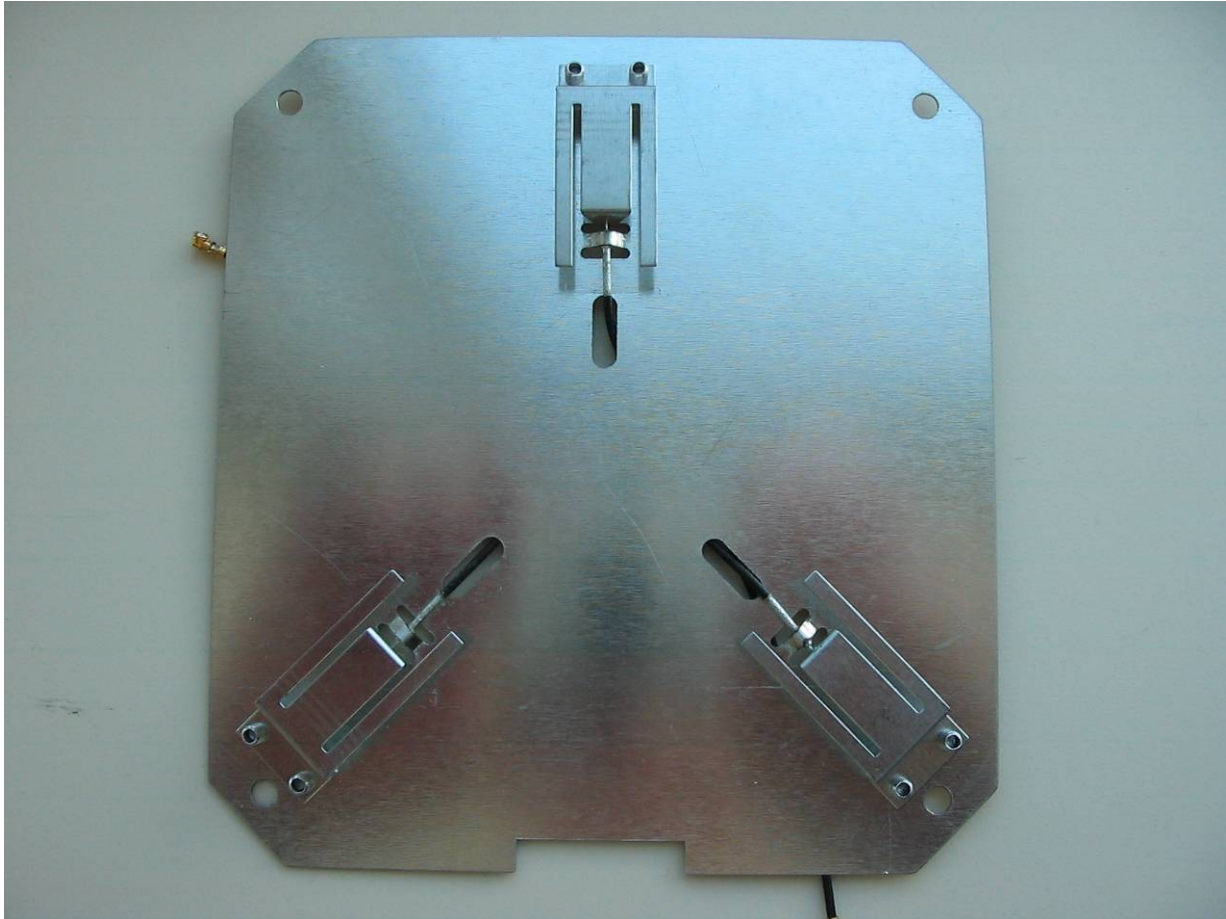

---


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

**Wistron 802.11 a/b/g/n wireless card  
Wireless Access Card (Top)**

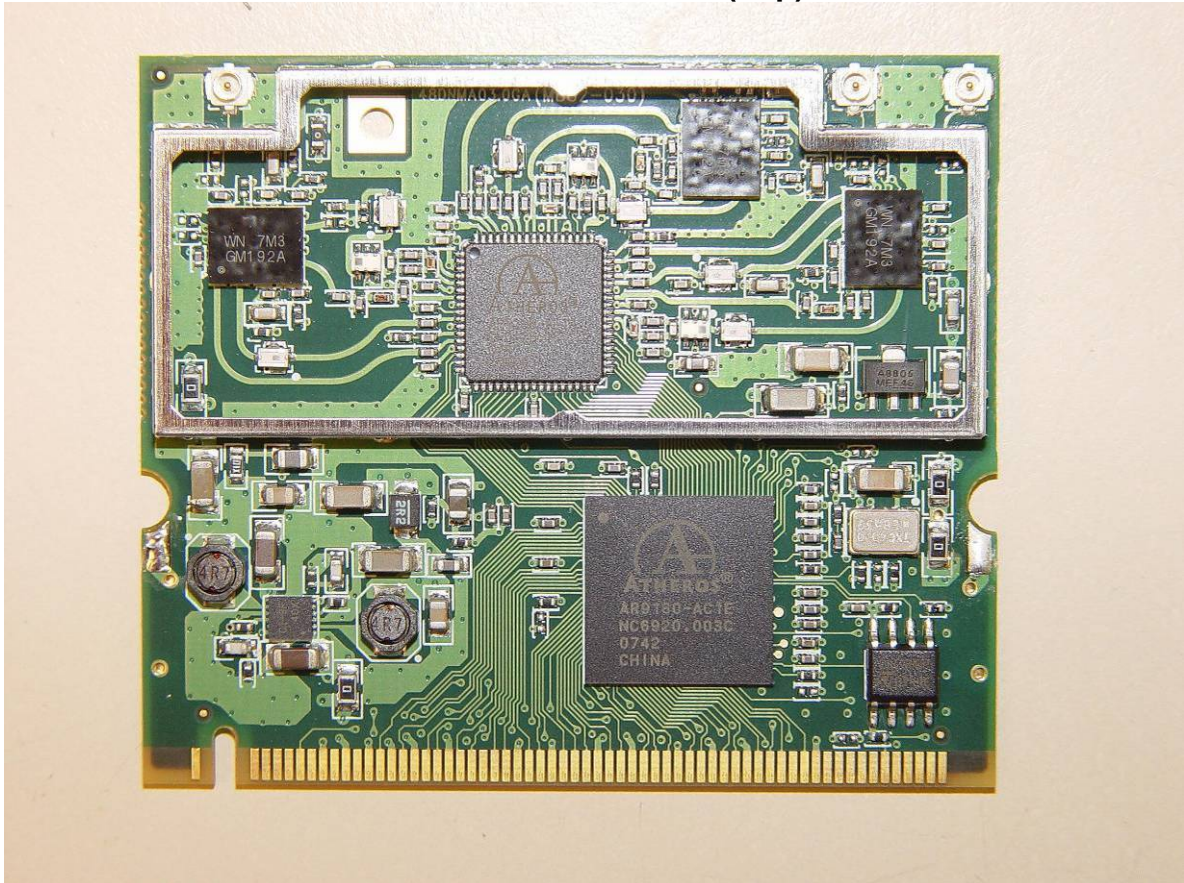

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

**Wistron 802.11 a/b/g/n wireless card  
Wireless Access Card (Bottom)**

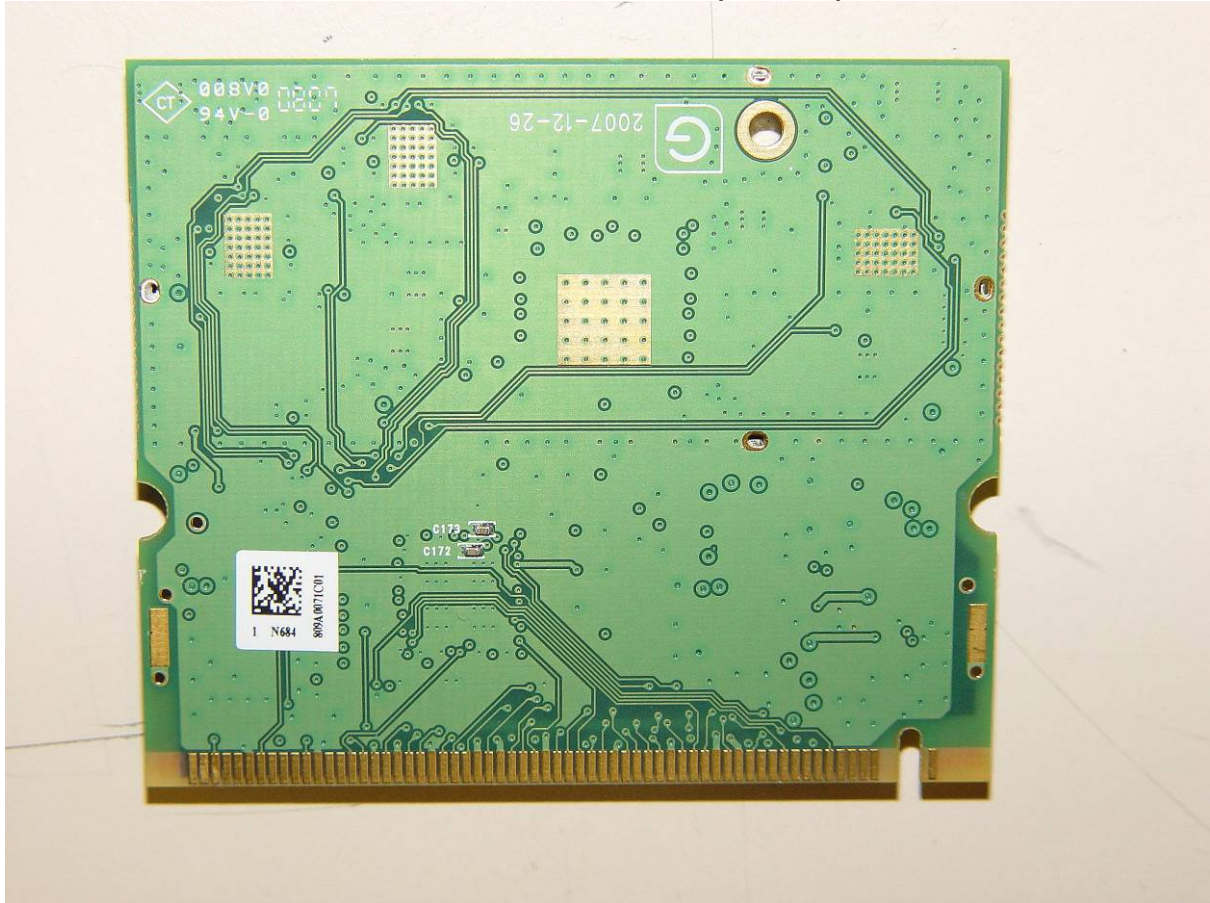





**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 17 of 68

### 3.3. Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description (Including Brand Name)	Mfr	Model No.	Serial No.
EUT	Access Card	Wistron	DNMA-83	D027814A010EC01
Support	Wireless Access Point	Colubris Networks	MSM410	230394
Support	Laptop PC	HP		

### 3.4. Antenna Details

- Laird Technologies SM24513P MIMO AP Antenna
  - Maximum Gain 2,400 – 2,483.5 MHz, 2.73 dBi
  - Maximum Gain 5,150 – 5,875 MHz, 6.45 dBi

### 3.5. Cabling and I/O Ports

Number and type of I/O ports on supporting wireless access point

- 2 X RJ-45 , 10/100/1000 BASE-T Ethernet, Auto MDX

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 3.6. Test Configurations

Testing was performed to determine the highest power level versus bit rate. The variant with the highest power was used to exercise the product.

Matrix of test configurations

Operational Mode(s) (802.11)	Variant	Data Rates with Highest Power	Frequencies (MHz)
a	Legacy	6 MBit/s	5,260
n	HT-20	6.5 MCS	5,300 5,320
	HT-40	13.5 MCS	5,270 5,310
a	Legacy	6 MBit/s	5,500
n	HT-20	6.5 MCS	5,600 5,700
	HT-40	13.5 MCS	5,510 5,620 5,690

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 19 of 68

---

### **3.7. Equipment Modifications**

The following modifications were required to bring the equipment into compliance:

1. NONE

### **3.8. Deviations from the Test Standard**

The following deviations from the test standard were required in order to complete the test program:

1. NONE

### **3.9. Subcontracted Testing or Third Party Data**

1. NONE

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



#### 4. TEST SUMMARY

##### List of Measurements

The following table represents the list of measurements required under the **FCC CFR47 Part 15.407** and **Industry Canada RSS-210** and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
N/A	Band-Edge Compliance	20 dB band-edge 5600-5650 MHz	Conducted	Complies	5.1.1
<b>15.407(b)(2)</b> <b>15.205(a)</b> <b>15.209(a)</b> <b>2.2</b> <b>2.6</b> <b>A9.3(2)</b> <b>4.7</b>	Radiated Emissions		Radiated		5.1.2
	Transmitter Radiated Spurious Emissions	Emissions above 1 GHz	Radiated	Complies	5.1.2.1
	Radiated Band Edge	Band edge results	Radiated	Complies	5.1.2.1
<b>RSS-GEN</b> <b>§4.8, §6</b>	Receiver Radiated Spurious Emissions	Emissions above 1 GHz	Radiated	Complies	5.1.2.2

- Note 1:** Test results reported in this document relate only to the items tested
- Note 2:** The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria
- Note 3:** **Section 3.7 Equipment Modifications** highlights the equipment modifications that were required to bring the product into compliance with the above test matrix

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## 5. TEST RESULTS


### 5.1. Device Characteristics

#### 5.1.1. Band-Edge 5600 – 5650 MHz (15.407)

#### Test Procedure

The test methodology and conditions utilized for each measurement is referenced in the following test results matrix. Band-edge data was measured per the following test set-up, measurements were performed on a single chain.

#### Test Configuration

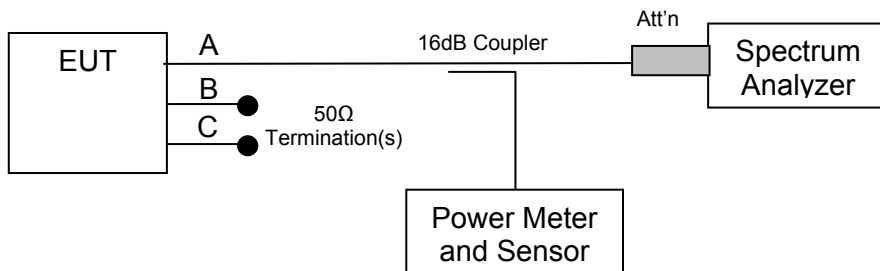

Test configuration for Centre Frequencies



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 22 of 68

<b>Test Conditions:</b>	15.407 Band-Edge	<b>Rel. Humidity (%):</b>	39 to 42
<b>Variant:</b>	802.11a	<b>Ambient Temp. (°C):</b>	21 to 22
<b>TPC:</b>	HIGH	<b>Pressure (mBars):</b>	998 to 1000
<b>Modulation:</b>	ON	<b>Duty Cycle (%):</b>	100
<b>Voltage:</b>	3.3 Vdc	<b>Antenna Gain:</b>	N/A dBi

<b>Test Frequency:</b>	5580 MHz			
<b>Power Setting:</b>	18 (Maximum)			
Band-Edge Frequency	Peak Marker	Band-Edge Power (5600 MHz)	20 dB Power Limit	Margin
MHz	dBm	dBm	dBm	dB
5600	+5.37	-30.64	-16.06	-14.6

<b>Test Frequency:</b>	5660 MHz			
<b>Power Setting:</b>	18 (Maximum)			
Band-Edge Frequency	Peak Marker	Band-Edge Power (5650 MHz)	20 dB Power Limit	Margin
MHz	dBm	dBm	dBm	dB
5650	+5.50	-20.22	-14.50	-5.72


<b>Measurement uncertainty:</b>	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**802.11a Lower Band-Edge Plot 5600 MHz**

Transmission was 802.11a, 5580 MHz maximum power

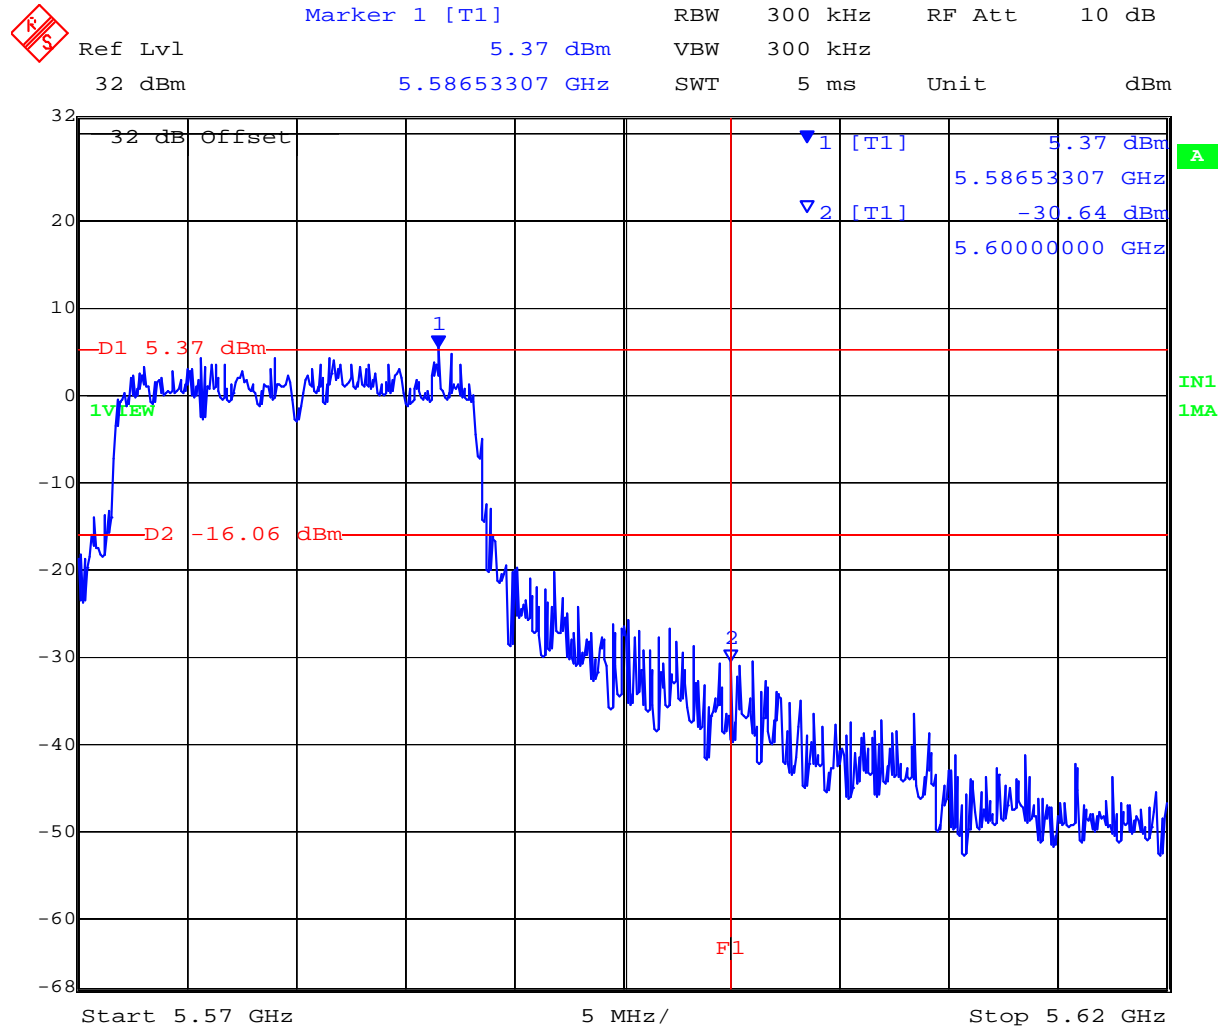


Date: 16.NOV.2009 16:37:28

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**802.11a Upper Band-Edge Plot 5650 MHz**

Transmission was 802.11a, 5660 MHz maximum power

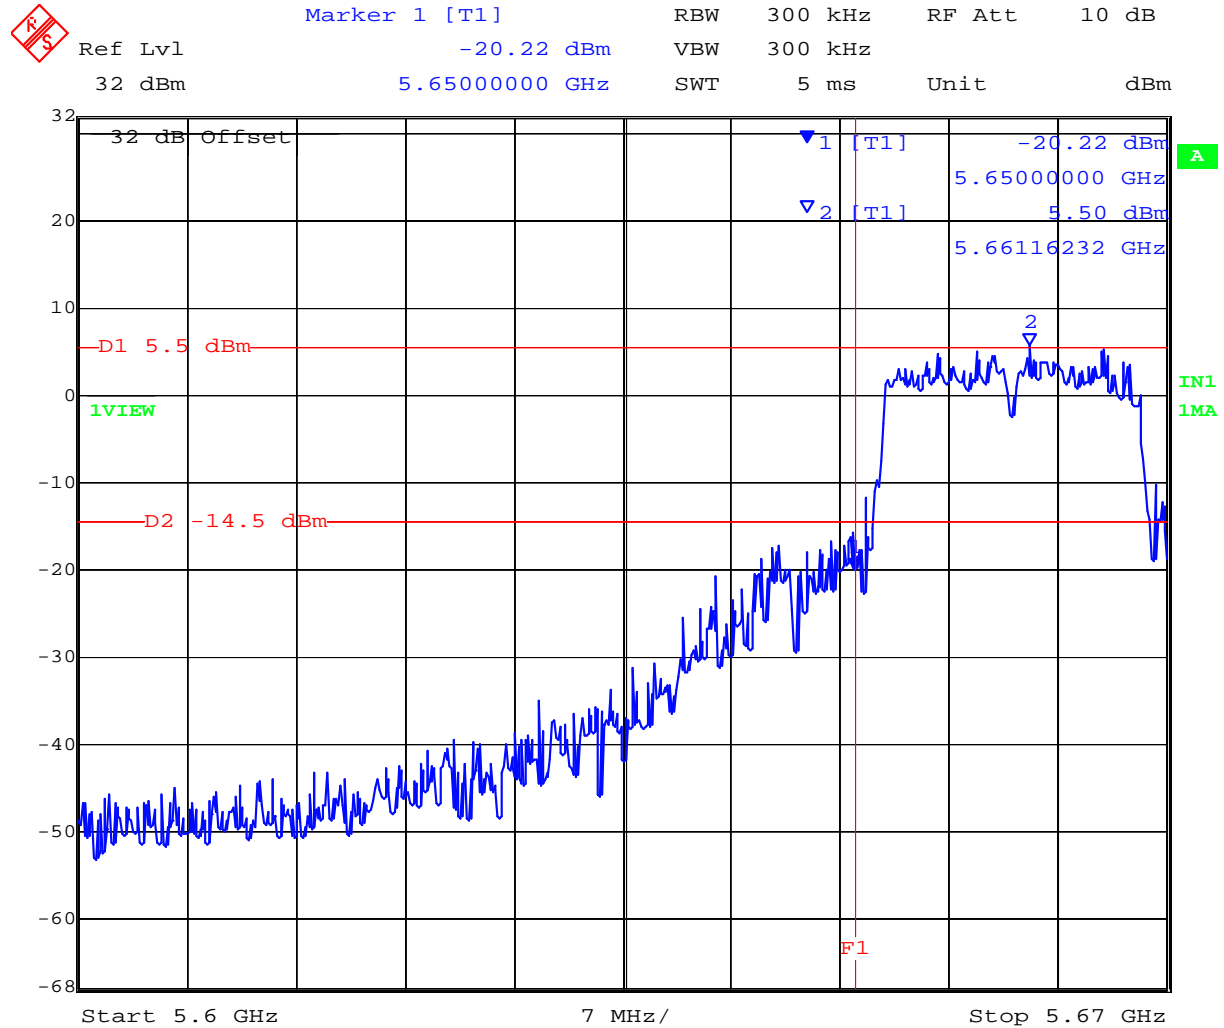

Date: 16.NOV.2009 16:26:55

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 25 of 68

<b>Test Conditions:</b>	15.407 Band-Edge	<b>Rel. Humidity (%):</b>	39 to 42
<b>Variant:</b>	802.11n HT-20	<b>Ambient Temp. (°C):</b>	21 to 22
<b>TPC:</b>	HIGH	<b>Pressure (mBars):</b>	998 to 1000
<b>Modulation:</b>	ON	<b>Duty Cycle (%):</b>	100
<b>Voltage:</b>	3.3 Vdc	<b>Antenna Gain:</b>	N/A dBi

<b>Test Frequency:</b>	5580 MHz			
<b>Power Setting:</b>	18 (Maximum)			
Band-Edge Frequency	Peak Marker	Band-Edge Power (5600 MHz)	20 dB Power Limit	Margin
MHz	dBm	dBm	dBm	dB
5600	+3.94	-38.72	-16.06	-22.7

<b>Test Frequency:</b>	5660 MHz			
<b>Power Setting:</b>	18 (Maximum)			
Band-Edge Frequency	Peak Marker	Band-Edge Power (5650 MHz)	20 dB Power Limit	Margin
MHz	dBm	dBm	dBm	dB
5650	+6.49	-18.92	-13.51	-5.41


<b>Measurement uncertainty:</b>	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**802.11n HT-20 Lower Band-Edge Plot 5600 MHz**

Transmission was 802.11n HT-20, 5580 MHz maximum power

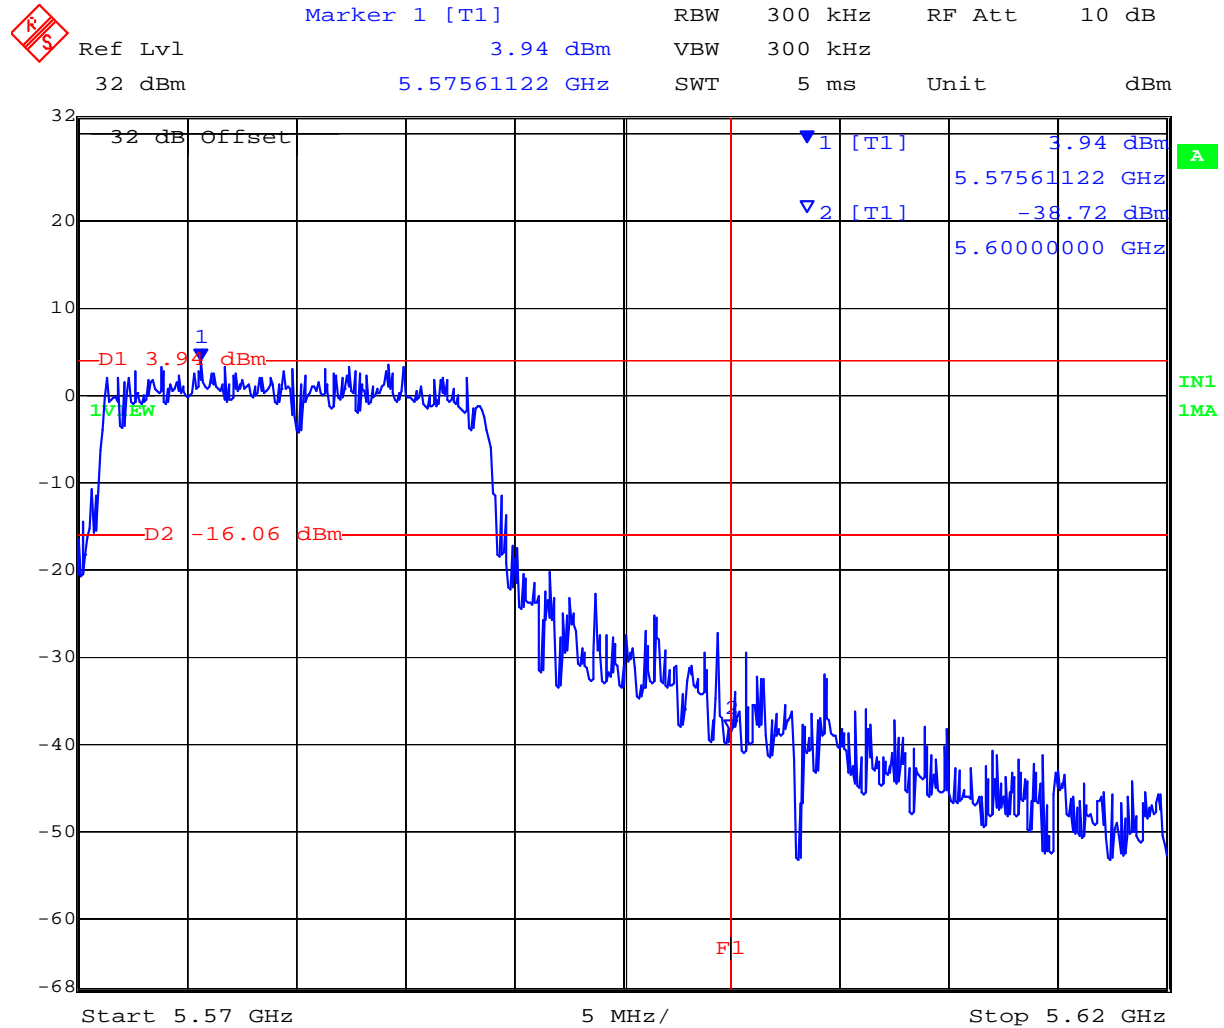


Date: 16.NOV.2009 16:32:32

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**802.11n HT-20 Upper Band-Edge Plot 5650 MHz**

Transmission was 802.11n HT-20, 5660 MHz maximum power

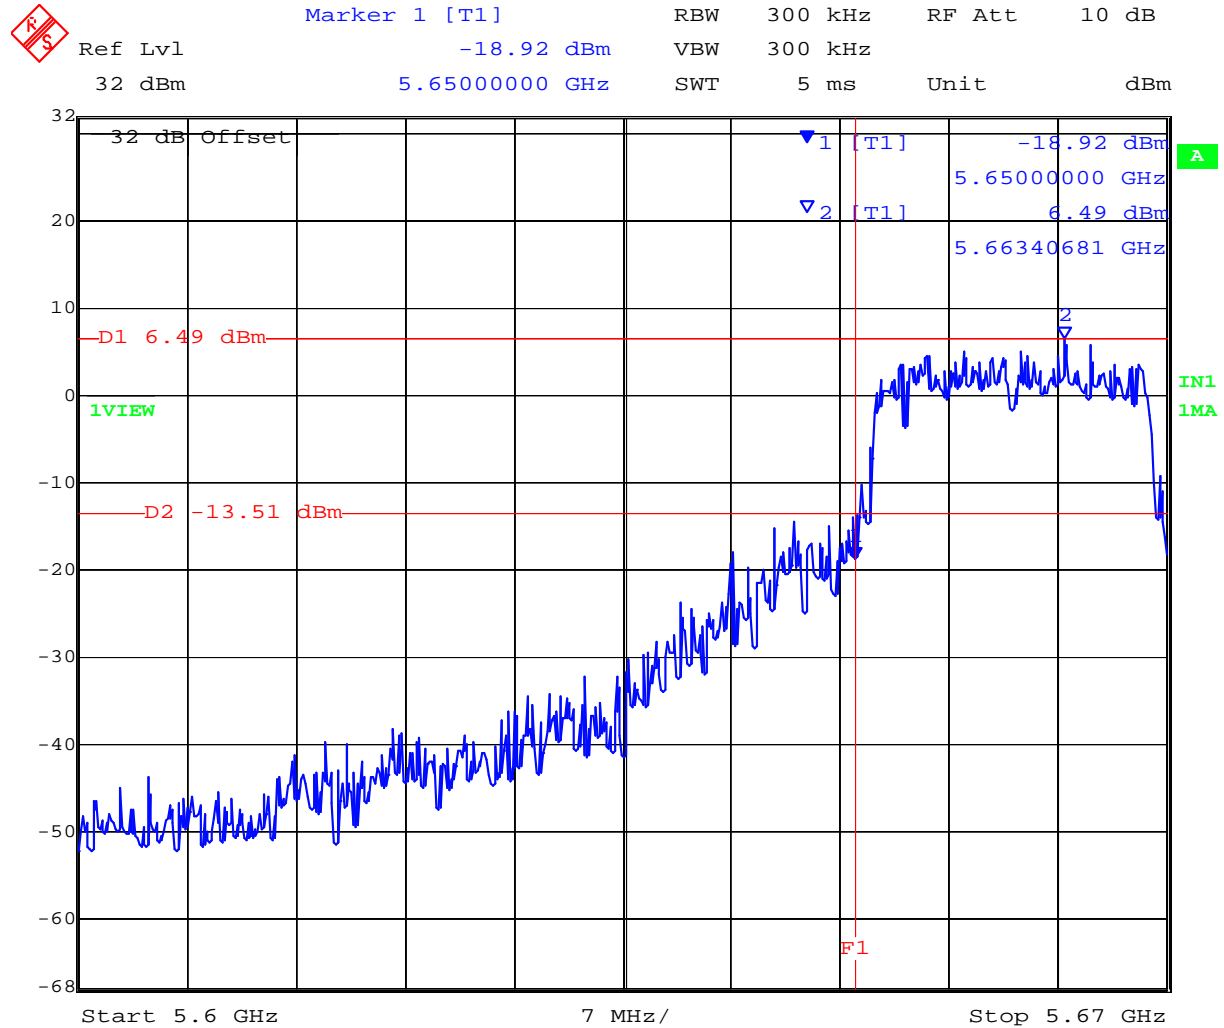

Date: 16.NOV.2009 16:29:25

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 28 of 68

<b>Test Conditions:</b>	15.407 Band-Edge	<b>Rel. Humidity (%):</b>	39 to 42
<b>Variant:</b>	802.11n HT-40	<b>Ambient Temp. (°C):</b>	21 to 22
<b>TPC:</b>	HIGH	<b>Pressure (mBars):</b>	998 to 1000
<b>Modulation:</b>	ON	<b>Duty Cycle (%):</b>	100
<b>Voltage:</b>	3.3 Vdc	<b>Antenna Gain:</b>	N/A dBi

<b>Test Frequency:</b>	5550 MHz			
<b>Power Setting:</b>	17 (Maximum)			
Band-Edge Frequency	Peak Marker	Band-Edge Power (5600 MHz)	20 dB Power Limit	Margin
MHz	dBm	dBm	dBm	dB
5600	0.08	-47.98	-19.92	-28.06

<b>Test Frequency:</b>	5670 MHz			
<b>Power Setting:</b>	17 (Maximum)			
Band-Edge Frequency	Peak Marker	Band-Edge Power (5650 MHz)	20 dB Power Limit	Margin
MHz	dBm	dBm	dBm	dB
5650	+1.21	-22.45	-18.79	-3.6


<b>Measurement uncertainty:</b>	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**802.11n HT-40 Lower Band-Edge Plot 5600 MHz**

Transmission was 802.11n HT-40, 5550 MHz maximum power

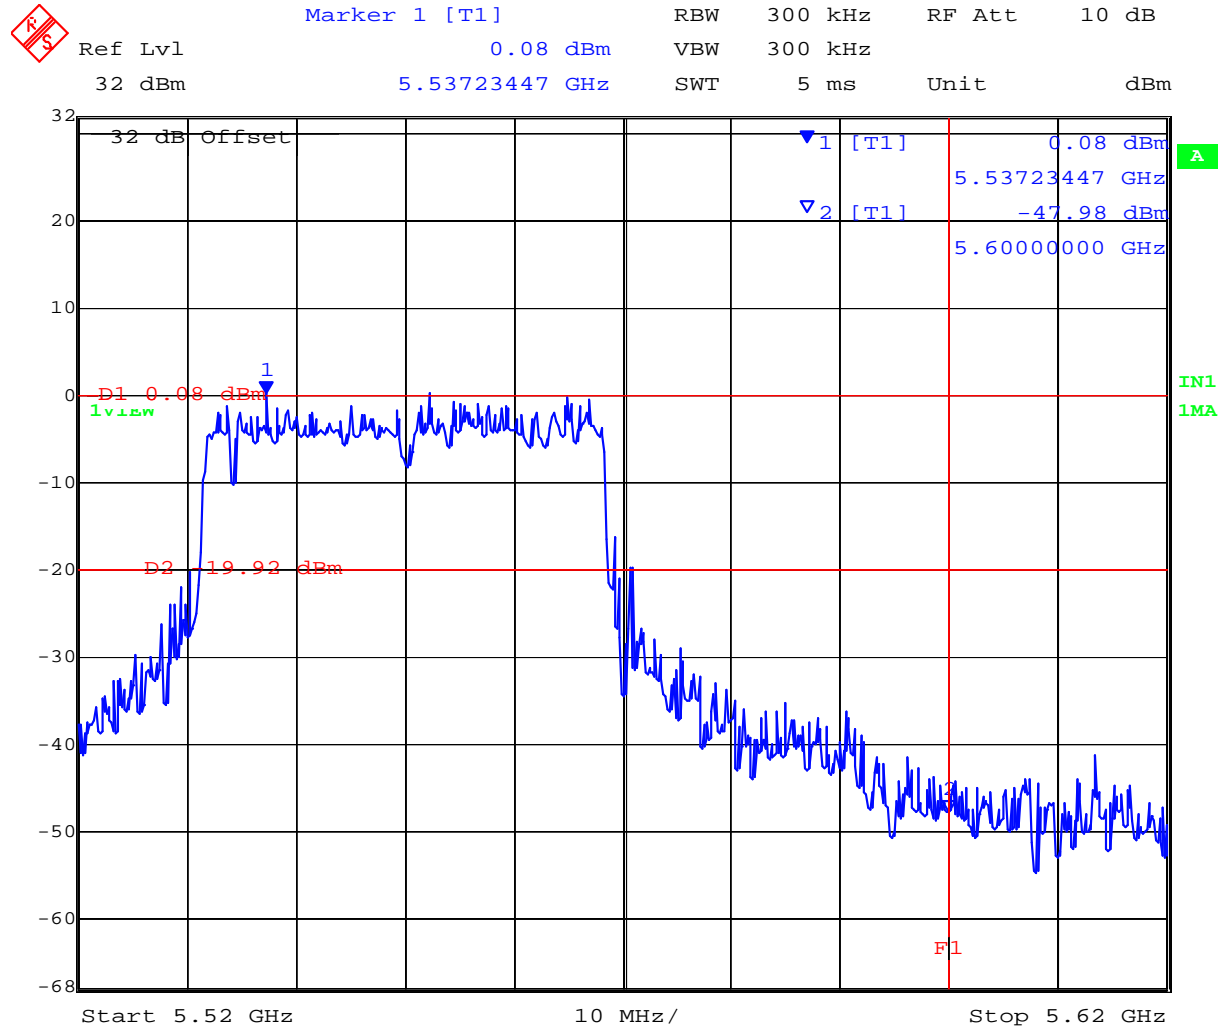


Date: 16.NOV.2009 16:15:43

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**802.11n HT-40 Upper Band-Edge Plot 5650 MHz**

Transmission was 802.11n HT-40, 5670 MHz maximum power

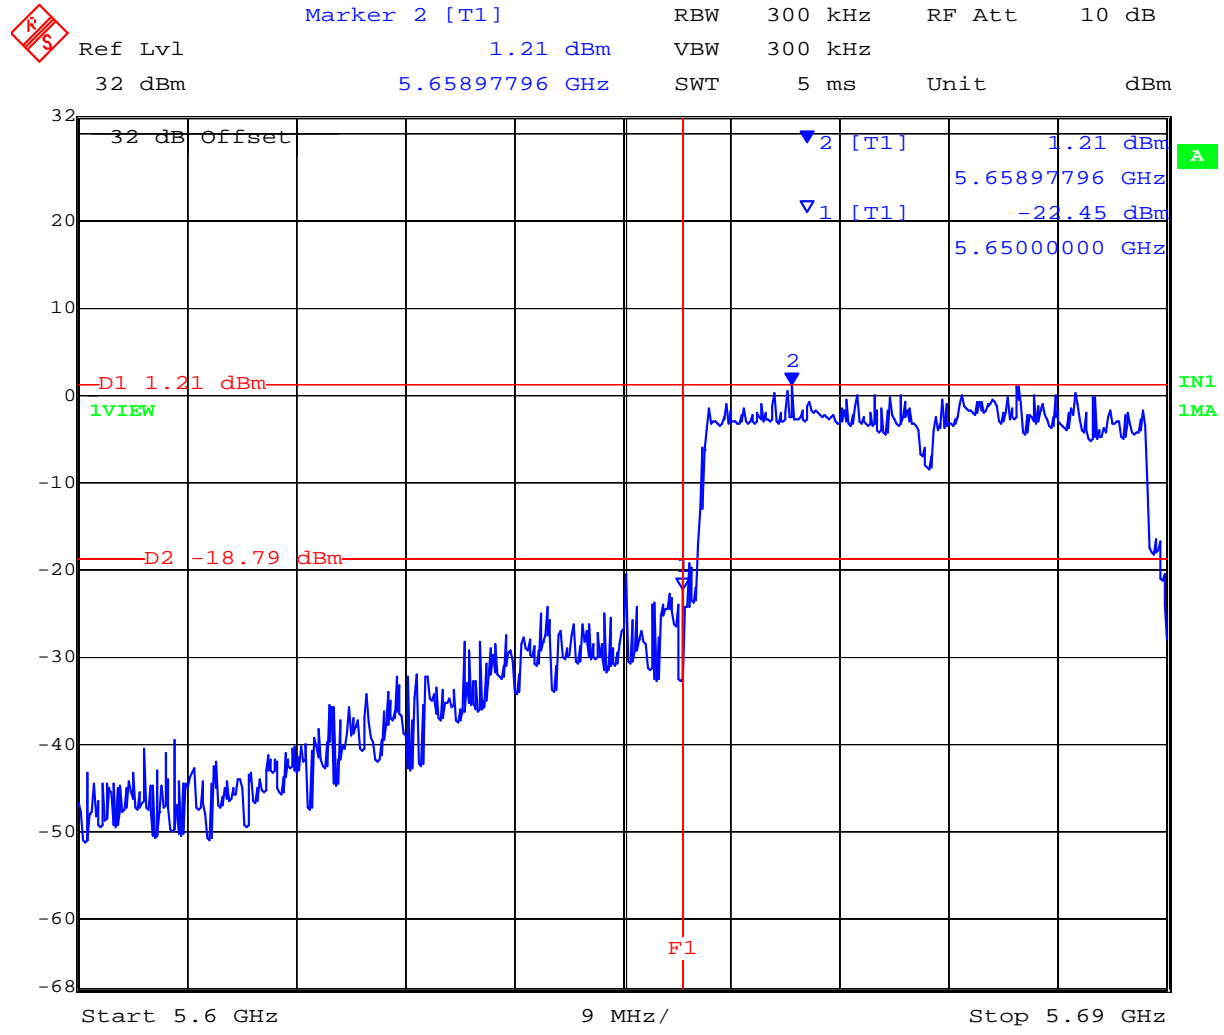

Date: 16.NOV.2009 16:20:38

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

**5.1.2. Radiated Emissions (15.407, RSS-210)**

**5.1.2.1. Transmitter Radiated Spurious Emissions (above 1 GHz) and Radiated Band Edge Measurements – Restricted Bands**


**FCC, Part 15 Subpart C §15.407(b)(2), §15.205(a)/15.209(a)**  
**Industry Canada RSS-210 §A9.3(2); §2.2; §2.6; RSS-Gen §4.7**

**Test Procedure**

Radiated emissions above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned.

All measurements on any frequency or frequencies over 1 MHz are based on the use of measurement instrumentation employing an average detector function. All measurements above 1 GHz were performed using a minimum resolution bandwidth of 1 MHz.

**Test Measurement Set up**

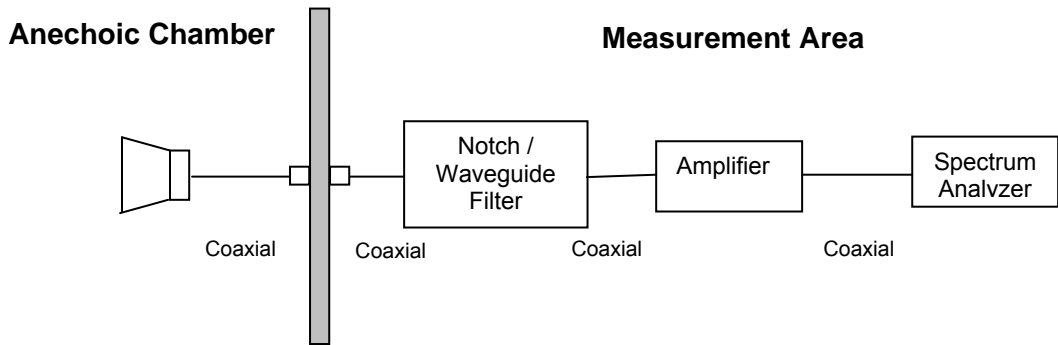

Measurement set up for Radiated Emission Test

**Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

- FS = R + AF + CORR - FO
- where: FS = Field Strength
- R = Measured Spectrum analyzer Input Amplitude
- AF = Antenna Factor
- CORR = Correction Factor = CL – AG + NFL
- CL = Cable Loss
- AG = Amplifier Gain
- FO = Distance Falloff Factor
- NFL = Notch Filter Loss or Waveguide Loss

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.







**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 33 of 68


TABLE OF RESULTS – 802.11a, Legacy 6 MBit/s Channel 36 (5,180 MHz)

Maximum Power

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments

No emissions found within 6 dB of the limit line

Band-edge – Restricted Bands  
 RB – Restricted Band  
 NRB – Non-Restricted Band

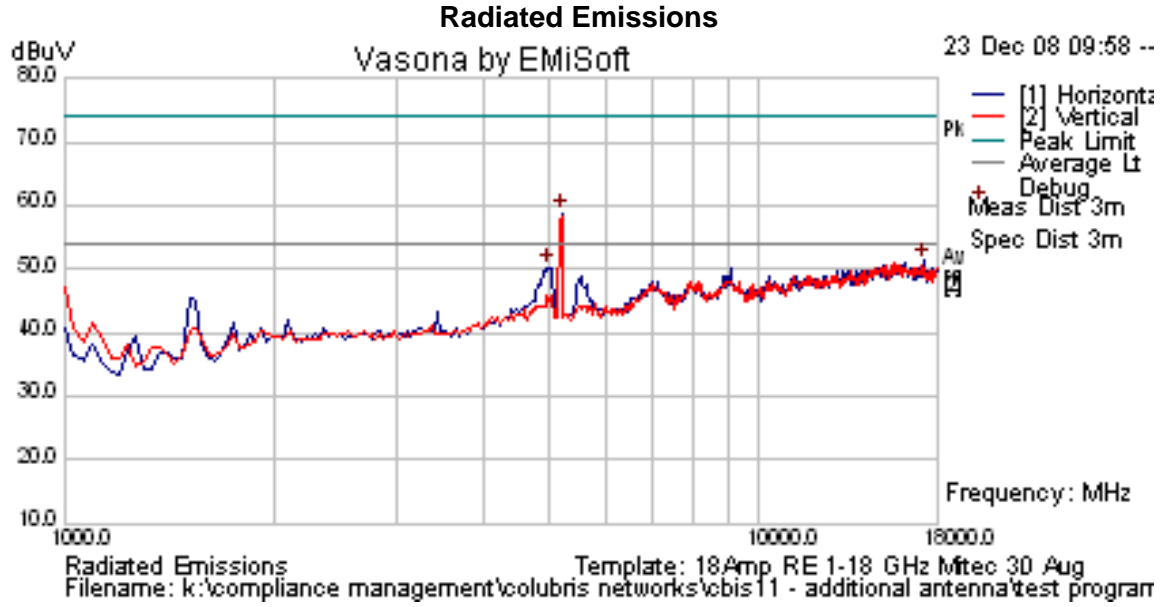

The above plot is peak emissions only

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 34 of 68


TABLE OF RESULTS – 802.11a, Legacy 6 MBit/s Channel 40 (5,200 MHz)

Maximum Power

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments

No emissions found within 6 dB of the limit line

Band-edge – Restricted Bands  
 RB – Restricted Band  
 NRB – Non-Restricted Band

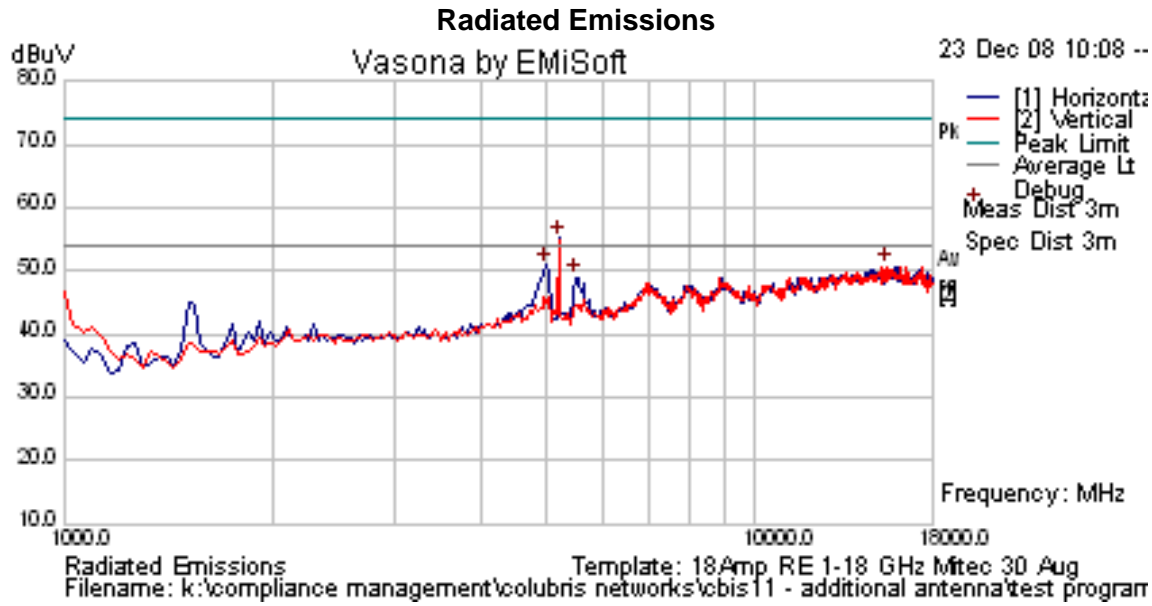

The above plot is peak emissions only

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 35 of 68


TABLE OF RESULTS – 802.11a, Legacy 6 MBit/s Channel 48 (5,240 MHz)

Maximum Power

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments

No emissions found within 6 dB of the limit line

Band-edge – Restricted Bands  
 RB – Restricted Band  
 NRB – Non-Restricted Band

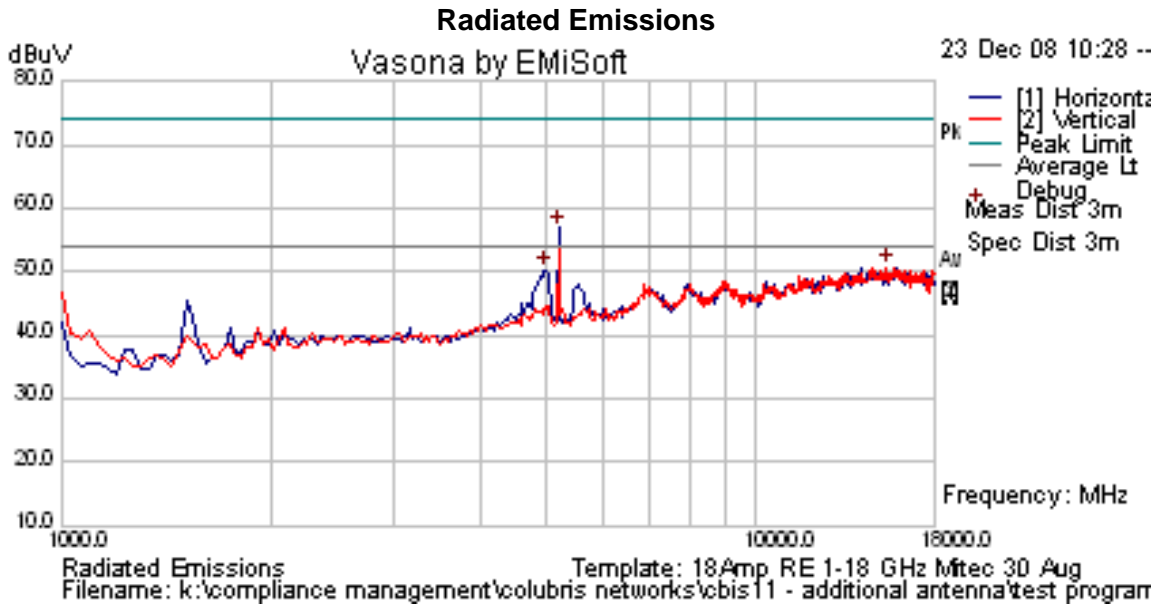

The above plot is peak emissions only

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 36 of 68


TABLE OF RESULTS – 802.11a, Legacy 6 MBit/s Channel 52 (5,260 MHz)

Maximum Power

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments

No emissions found within 6 dB of the limit line

Band-edge – Restricted Bands  
 RB – Restricted Band  
 NRB – Non-Restricted Band

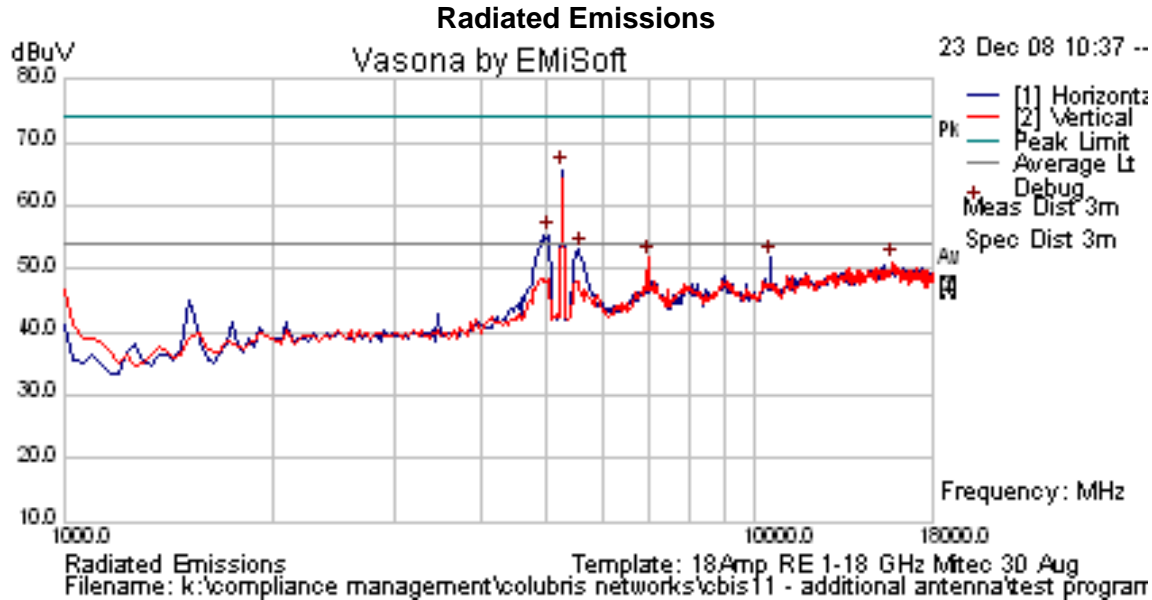

The above plot is peak emissions only

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 37 of 68

TABLE OF RESULTS – 802.11a, Legacy 6 MBit/s Channel 60 (5,300 MHz)

Maximum Power

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
15896.471	50.49	8.85	-0.52	58.82	Peak Max	H	98	243	74	-15.18	Pass	RB
15896.471	34.13	8.85	-0.52	42.46	Average Max	H	98	243	54	-11.54	Pass	RB

Band-edge – Restricted Bands  
 RB – Restricted Band  
 NRB – Non-Restricted Band

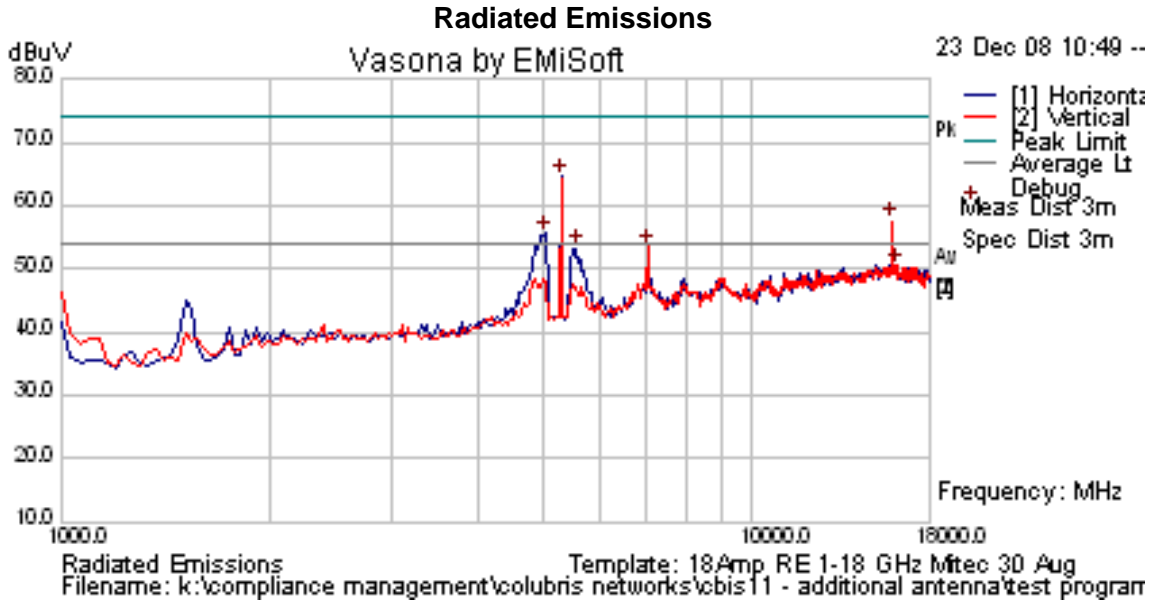

The above plot is peak emissions only

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 38 of 68

TABLE OF RESULTS – 802.11a, Legacy 6 MBit/s Channel 64 (5,320 MHz)

Maximum Power

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
15967.134	51.25	8.97	-0.49	59.72	Peak Max	V	98	361	74	-14.28	Pass	RB
15967.134	33.69	8.97	-0.49	42.16	Average Max	V	98	361	54	-11.84	Pass	RB

Band-edge – Restricted Bands  
 RB – Restricted Band  
 NRB – Non-Restricted Band

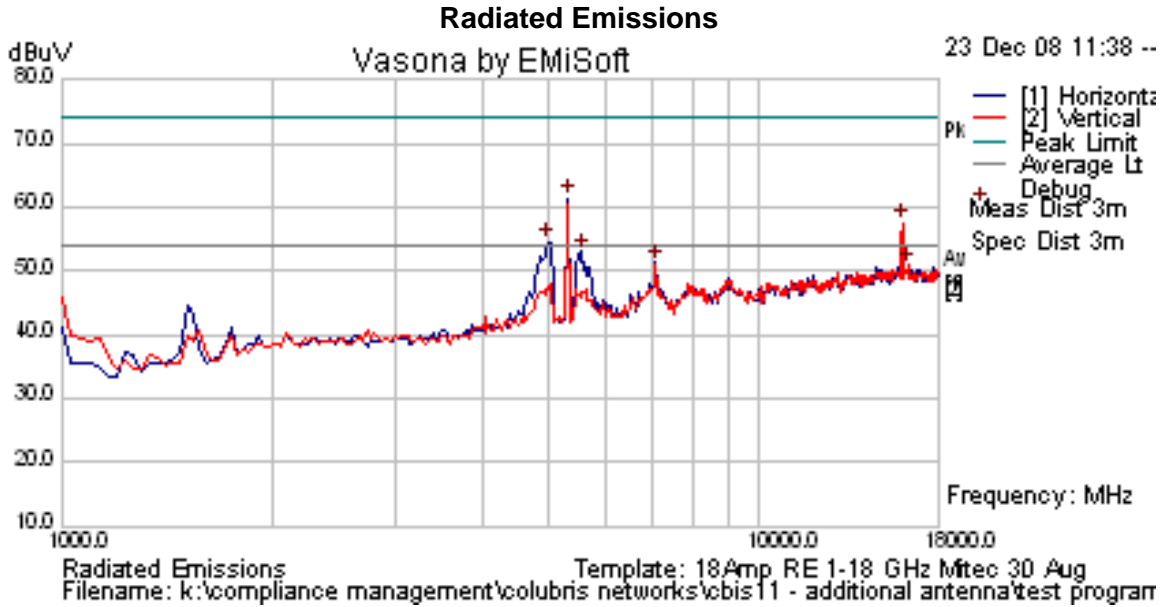

The above plot is peak emissions only

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 39 of 68


TABLE OF RESULTS – 802.11a, HT-20 6.5 MCS Channel 36 (5,180 MHz)

Maximum Power

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments

No emissions found within 6 dB of the limit line

Band-edge – Restricted Bands  
 RB – Restricted Band  
 NRB – Non-Restricted Band

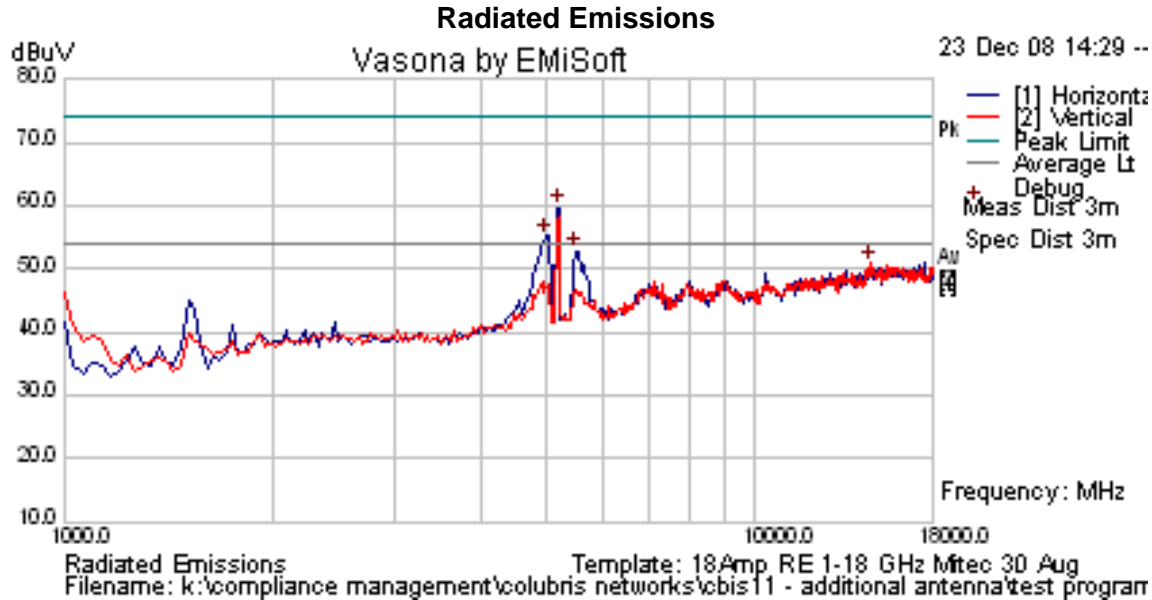

The above plot is peak emissions only

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 40 of 68


TABLE OF RESULTS – 802.11a, HT-20 6.5 MCS Channel 40 (5,200 MHz)

Maximum Power

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments

No emissions found within 6 dB of the limit line

Band-edge – Restricted Bands  
 RB – Restricted Band  
 NRB – Non-Restricted Band

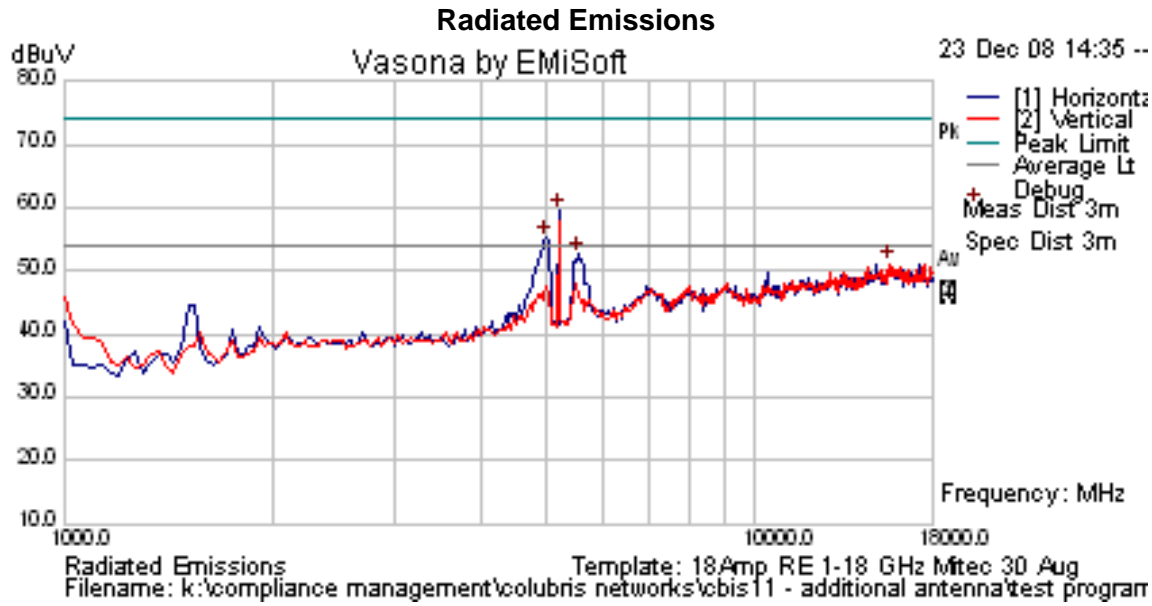

The above plot is peak emissions only

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 41 of 68


TABLE OF RESULTS – 802.11a, HT-20 6.5 MCS Channel 48 (5,240 MHz)

Maximum Power

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments

No emissions found within 6 dB of the limit line

Band-edge – Restricted Bands  
 RB – Restricted Band  
 NRB – Non-Restricted Band

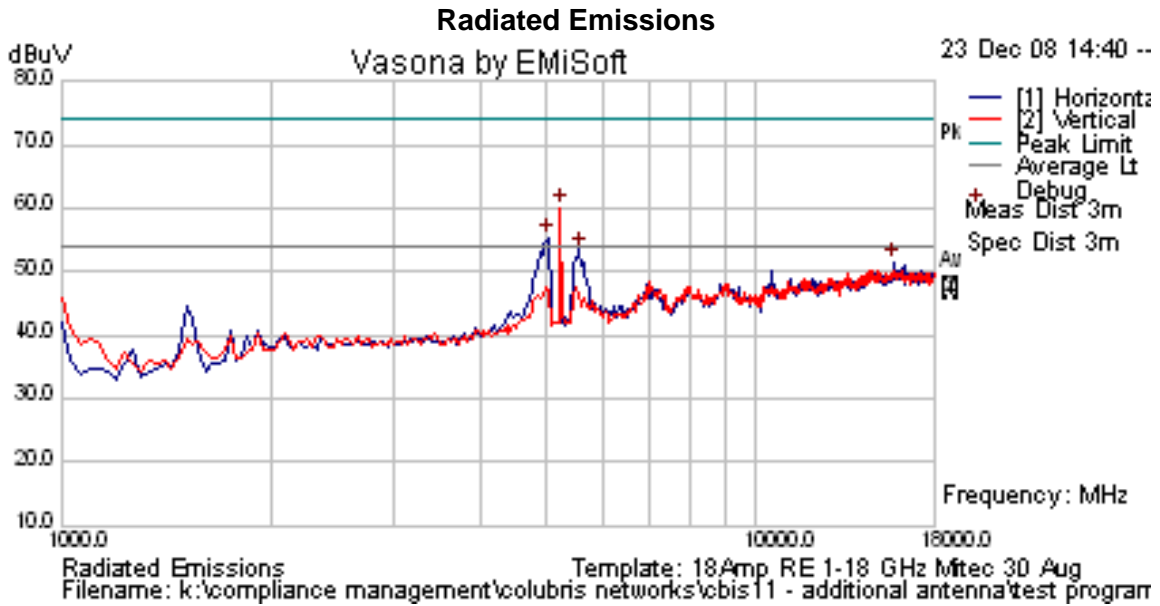

The above plot is peak emissions only

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 42 of 68


TABLE OF RESULTS – 802.11a, HT-20 6.5 MCS Channel 52 (5,260 MHz)

Maximum Power

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments

No emissions found within 6 dB of the limit line

Band-edge – Restricted Bands  
 RB – Restricted Band  
 NRB – Non-Restricted Band

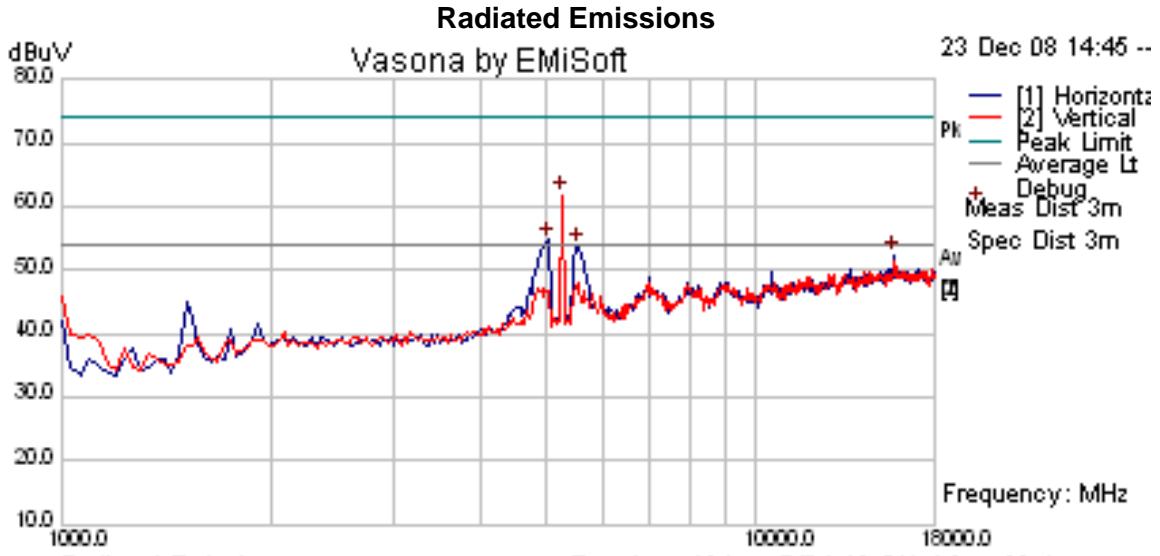

The above plot is peak emissions only

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

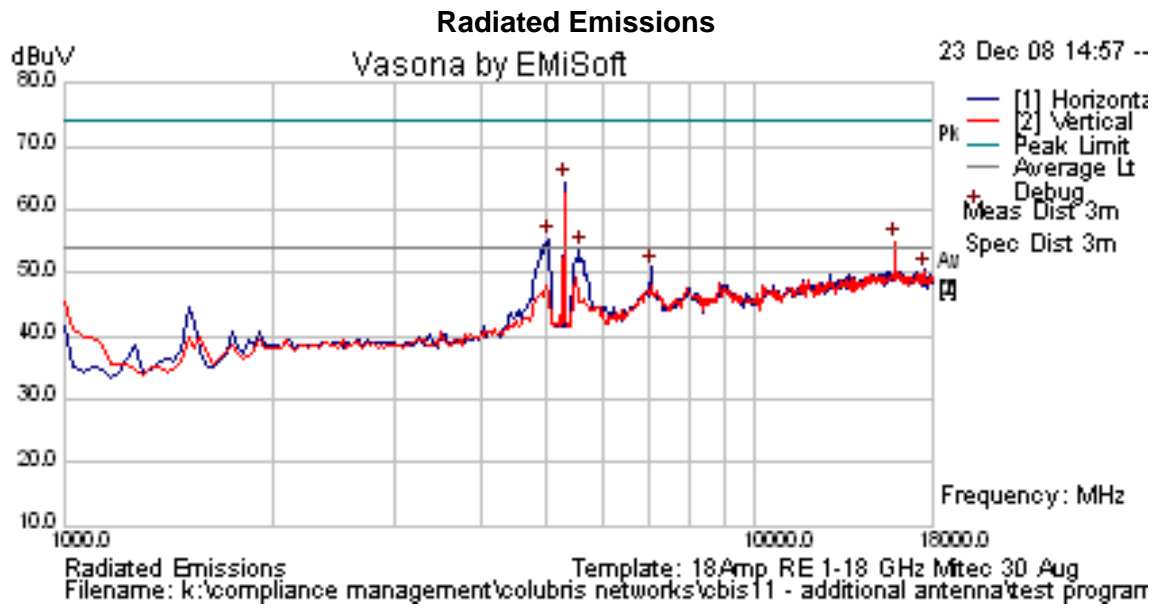


TABLE OF RESULTS – 802.11a, HT-20 6.5 MCS Channel 60 (5,300 MHz)

Maximum Power

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
15901.724	50.24	8.86	-0.51	58.59	Peak Max	V	98	21	74	-15.41	Pass	RB
7066.633	53.27	5.39	-1.76	56.91	Peak Max	H	119	305	74	-17.09	Pass	RB
15901.724	34.49	8.86	-0.51	42.84	Average Max	V	98	21	54	-11.16	Pass	RB
7066.633	45.39	5.4	-1.88	44.91	Average Max	H	125	190	54	-5.09	Pass	RB

Band-edge – Restricted Bands  
 RB – Restricted Band  
 NRB – Non-Restricted Band



The above plot is peak emissions only

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

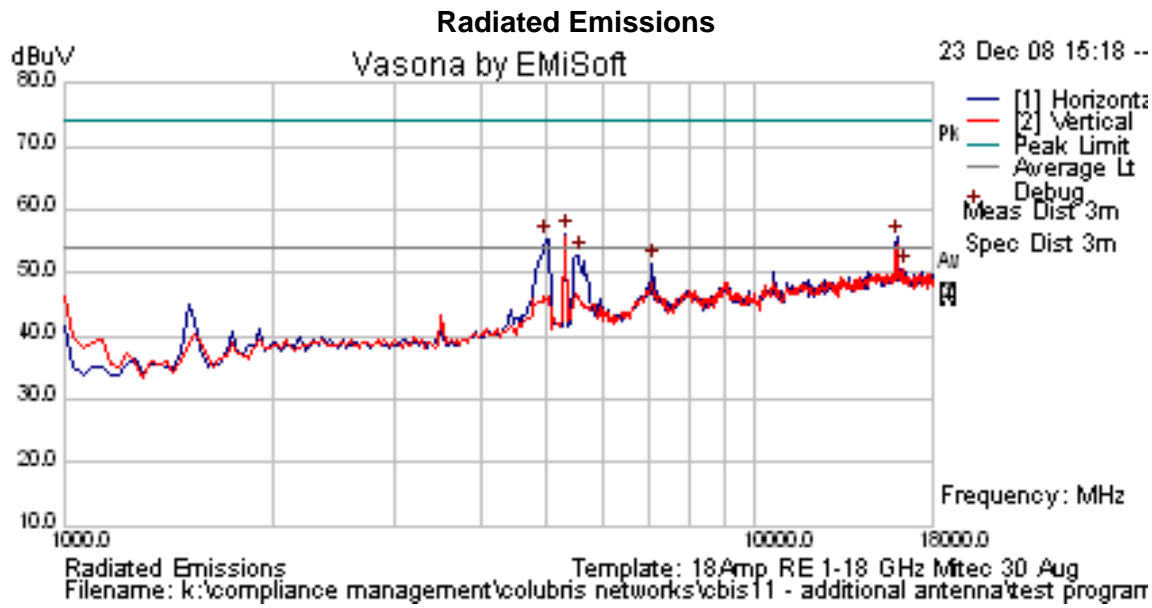


TABLE OF RESULTS – 802.11a, HT-20 6.5 MCS Channel 64 (5,320 MHz)

Maximum Power

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
15963.619	51.38	8.96	-0.49	59.85	Peak Max	V	139	10	74	-14.15	Pass	RB
7093.106	50.73	5.4	-1.88	54.26	Peak Max	H	119	25	74	-19.74	Pass	RB
15963.619	34.42	8.96	-0.49	42.89	Average Max	V	139	10	54	-11.11	Pass	RB
7093.106	43.39	5.4	-1.88	46.91	Average Max	H	119	25	54	-7.09	Pass	RB

Band-edge – Restricted Bands  
 RB – Restricted Band  
 NRB – Non-Restricted Band



The above plot is peak emissions only

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 45 of 68

TABLE OF RESULTS – 802.11a, HT-40 13.5 MCS Channel 5, 190 MHz


Maximum Power

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments

No emissions found within 6 dB of the limit line

Band-edge – Restricted Bands  
 RB – Restricted Band  
 NRB – Non-Restricted Band

**Radiated Emissions**

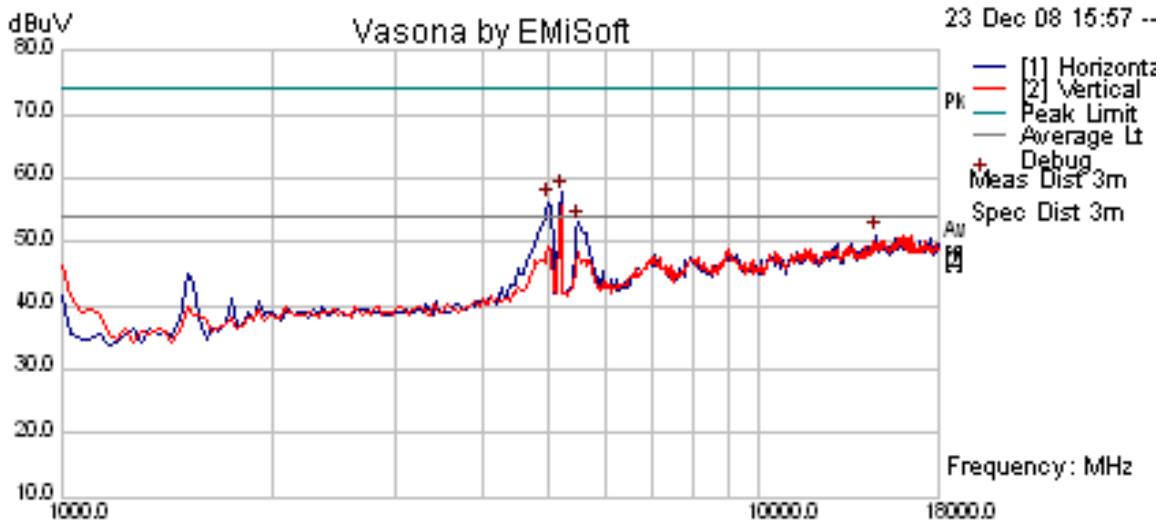

Radiated Emissions Template: 18Amp RE 1-18 GHz Mitec 30 Aug  
 Filename: k:\compliance management\colubris networks\cbis11 - additional antenna\test program

The above plot is peak emissions only

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 46 of 68


TABLE OF RESULTS – 802.11a, HT-40 13.5 MCS Channel 5,230 MHz

Maximum Power

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments

No emissions found within 6 dB of the limit line

Band-edge – Restricted Bands  
 RB – Restricted Band  
 NRB – Non-Restricted Band

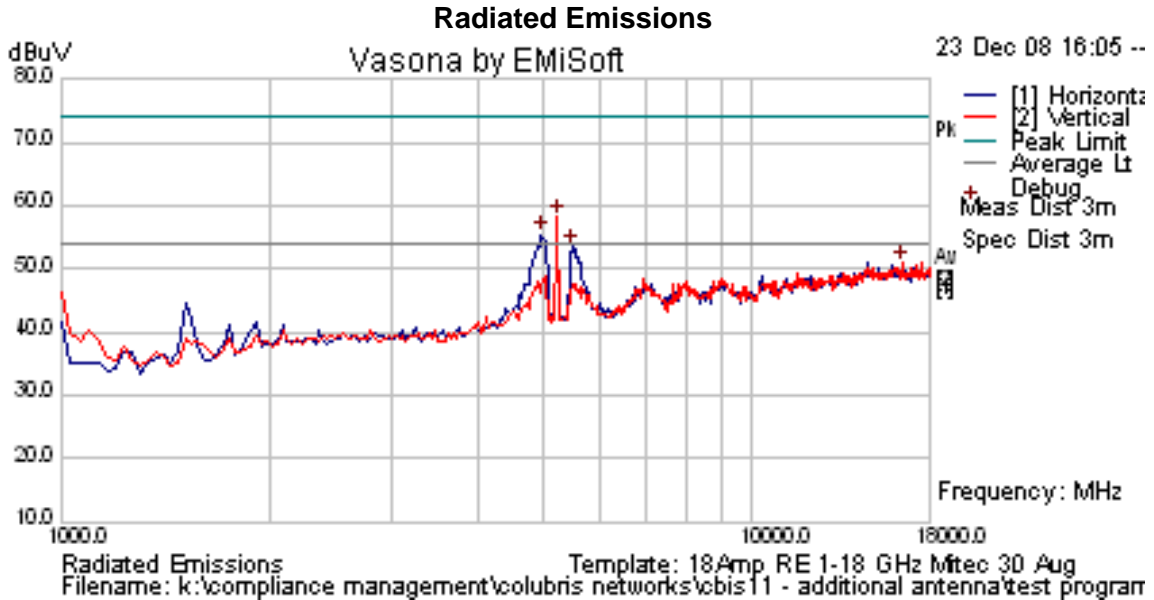

The above plot is peak emissions only

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 47 of 68

TABLE OF RESULTS – 802.11a, HT-40 13.5 MCS Channel 5,270 MHz

Maximum Power

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
7026.663	52.03	5.39	-1.61	55.81	Peak Max	H	127	311	74	-18.19	Pass	
7026.663	46.04	5.39	-1.61	49.81	Average Max	H	125	311	54	-4.19	Pass	

Band-edge – Restricted Bands  
 RB – Restricted Band  
 NRB – Non-Restricted Band

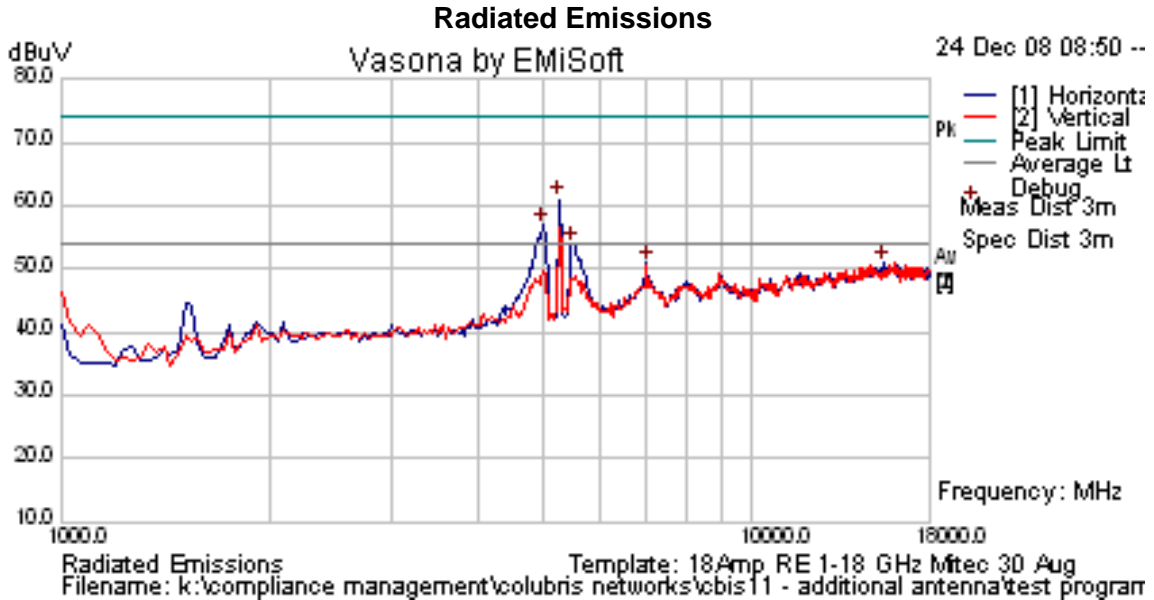

The above plot is peak emissions only

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 48 of 68

TABLE OF RESULTS – 802.11a, HT-40 13.5 MCS Channel 5,310 MHz

Maximum Power

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
7079.908	54.46	5.4	-1.82	58.04	Peak Max	V	161	360	74	-15.96	Pass	
7079.908	49.54	5.4	-1.82	53.12	Average Max	V	161	360	54	-0.88	Pass	

Band-edge – Restricted Bands  
 RB – Restricted Band  
 NRB – Non-Restricted Band

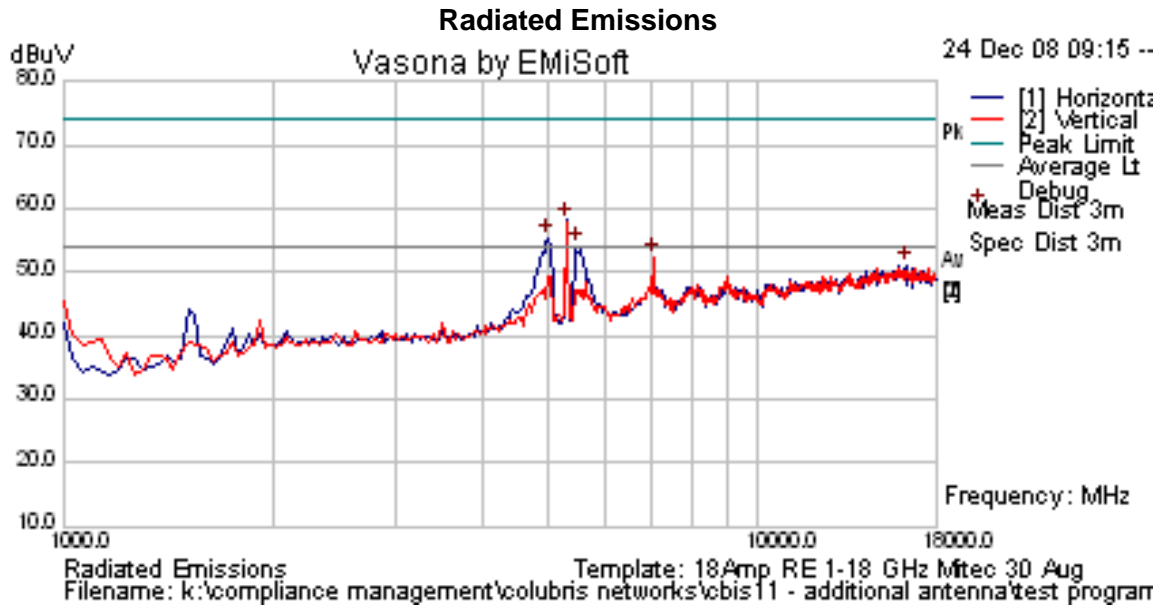

The above plot is peak emissions only

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 49 of 68

TABLE OF RESULTS – 802.11a, Legacy 6 MBit/s Channel 100 (5,500 MHz)


Maximum Power

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments

No emissions found within 6 dB of the limit line

Band-edge – Restricted Bands  
 RB – Restricted Band  
 NRB – Non-Restricted Band

Radiated Emissions

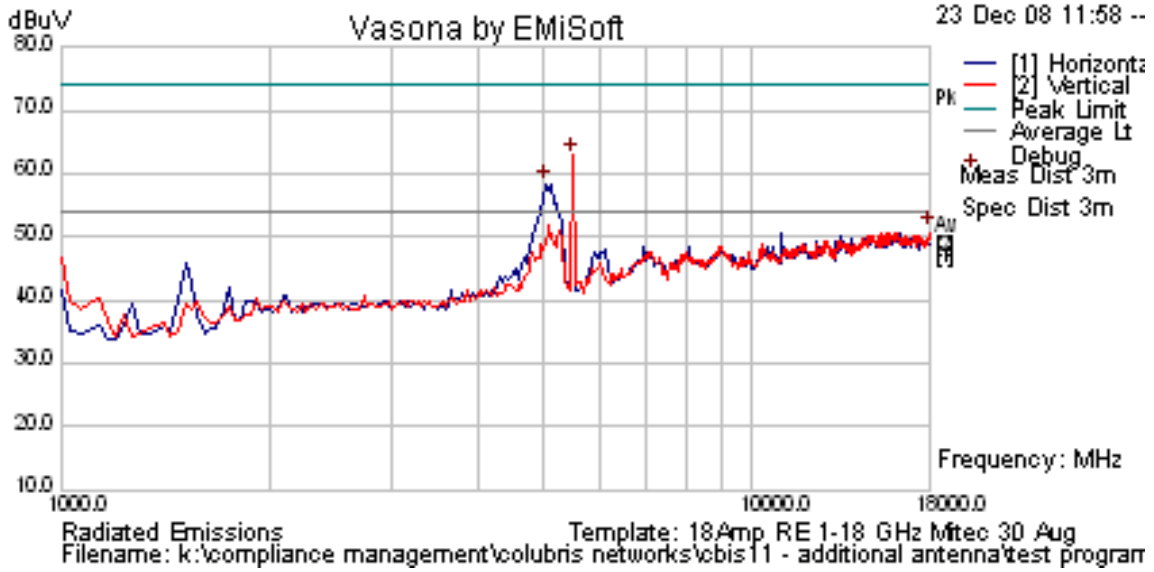

The above plot is peak emissions only

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

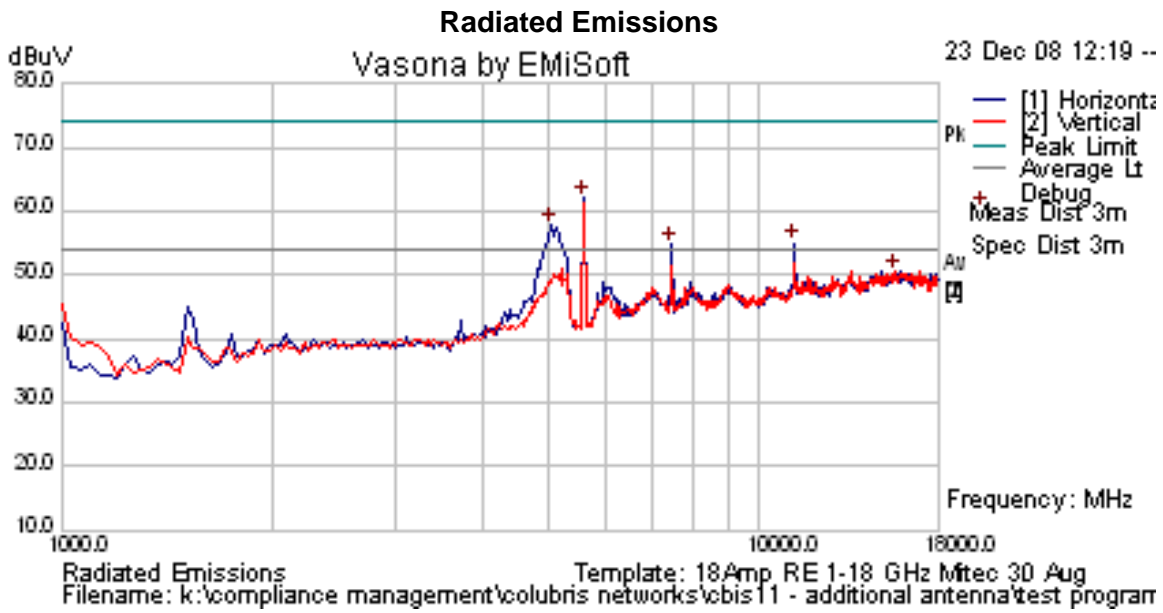


TABLE OF RESULTS – 802.11a, Legacy 6 MBit/s Channel 120 (5,600 MHz)

Maximum Power

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
11199.92	54.6	6.9	-1.34	60.16	Peak Max	H	99	303	74	-13.84	Pass	RB
7466.781	55.11	5.47	-3.7	56.89	Peak Max	H	108	330	74	-17.11	Pass	RB
11199.92	39.71	6.9	-1.34	45.26	Average Max	H	99	303	54	-8.74	Pass	RB
7466.781	51.32	5.47	-3.7	53.09	Average Max	H	108	330	54	-0.91	Pass	RB

Band-edge – Restricted Bands  
 RB – Restricted Band  
 NRB – Non-Restricted Band



The above plot is peak emissions only

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

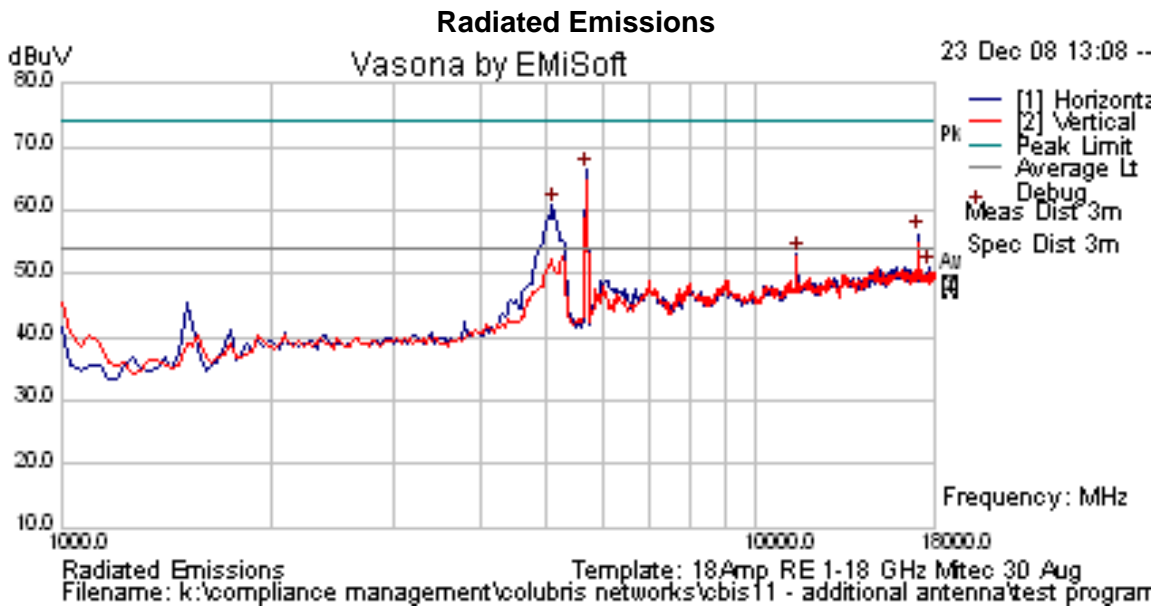


TABLE OF RESULTS – 802.11a, Legacy 6 MBit/s Channel 140 (5,700 MHz)

Maximum Power

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
17096.56	49.99	8.53	-0.35	58.17	Peak Max	V	98	12	74	-15.83	Pass	RB
11402.068	51.12	6.82	-1.45	56.5	Peak Max	H	103	43	74	-17.5	Pass	RB
17096.56	34.59	8.53	-0.35	42.77	Average Max	V	98	12	54	-11.23	Pass	RB
11402.068	35.77	6.82	-1.45	41.15	Average Max	H	103	43	54	-12.85	Pass	RB

Band-edge – Restricted Bands  
 RB – Restricted Band  
 NRB – Non-Restricted Band



The above plot is peak emissions only

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 52 of 68

TABLE OF RESULTS – 802.11a, HT-20 6.5 MCS Channel 100 (5,500 MHz)


Maximum Power

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments

No emissions found within 6 dB of the limit line

Band-edge – Restricted Bands  
 RB – Restricted Band  
 NRB – Non-Restricted Band

**Radiated Emissions**

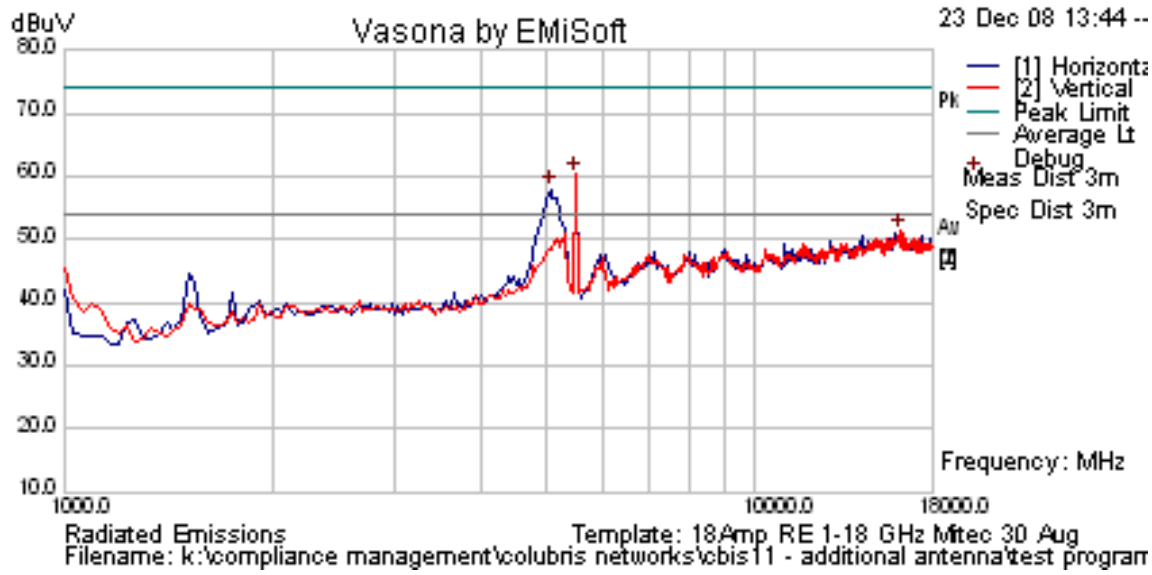

The above plot is peak emissions only

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

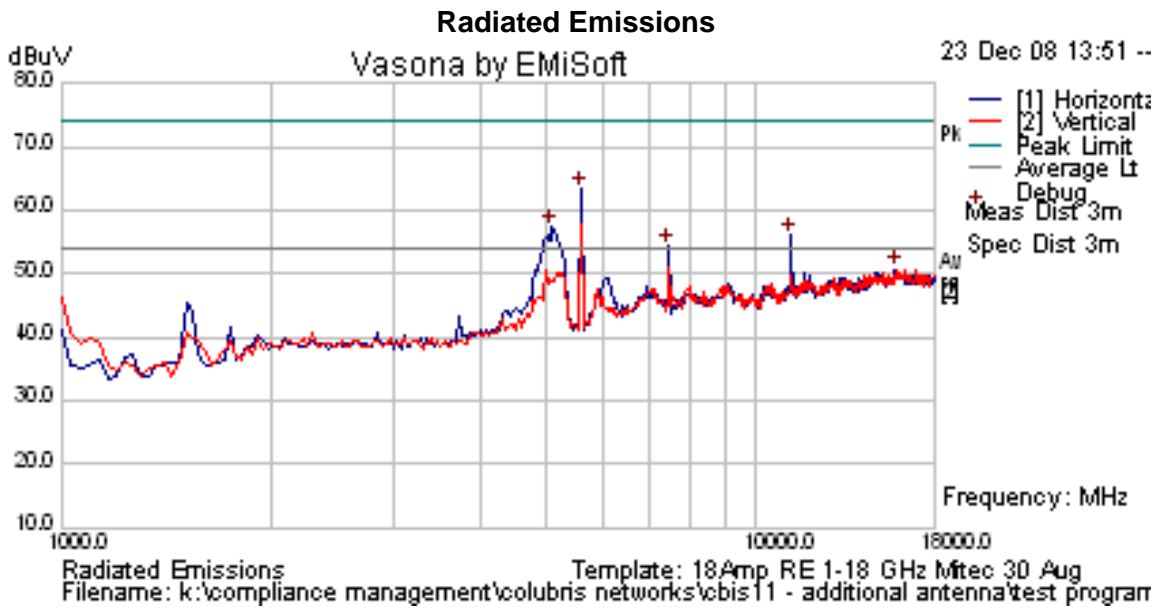


TABLE OF RESULTS – 802.11a, HT-20 6.5 MCS Channel 120 (5,600 MHz)

Maximum Power

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
11199.439	53.01	6.9	-1.34	58.57	Peak Max	H	99	298	74	-15.43	Pass	
7466.691	57.12	5.47	-3.7	58.9	Peak Max	H	118	324	74	-15.1	Pass	
11199.439	37.94	6.9	-1.34	43.5	Average Max	H	99	298	54	-10.5	Pass	
7466.691	40.47	5.47	-3.7	42.24	Average Max	H	119	324	54	-11.76	Pass	

Band-edge – Restricted Bands  
 RB – Restricted Band  
 NRB – Non-Restricted Band



The above plot is peak emissions only

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 54 of 68

TABLE OF RESULTS – 802.11a, HT-20 6.5 MCS Channel 140 (5,700 MHz)

Maximum Power

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
17096.56	49.99	8.53	-0.35	58.17	Peak Max	V	98	12	74	-15.83	Pass	
11402.068	51.12	6.82	-1.45	56.5	Peak Max	H	103	43	74	-17.5	Pass	
17096.56	34.59	8.53	-0.35	42.77	Average Max	V	98	12	54	-11.23	Pass	
11402.068	35.77	6.82	-1.45	41.15	Average Max	H	103	43	54	-12.85	Pass	

Band-edge – Restricted Bands  
 RB – Restricted Band  
 NRB – Non-Restricted Band

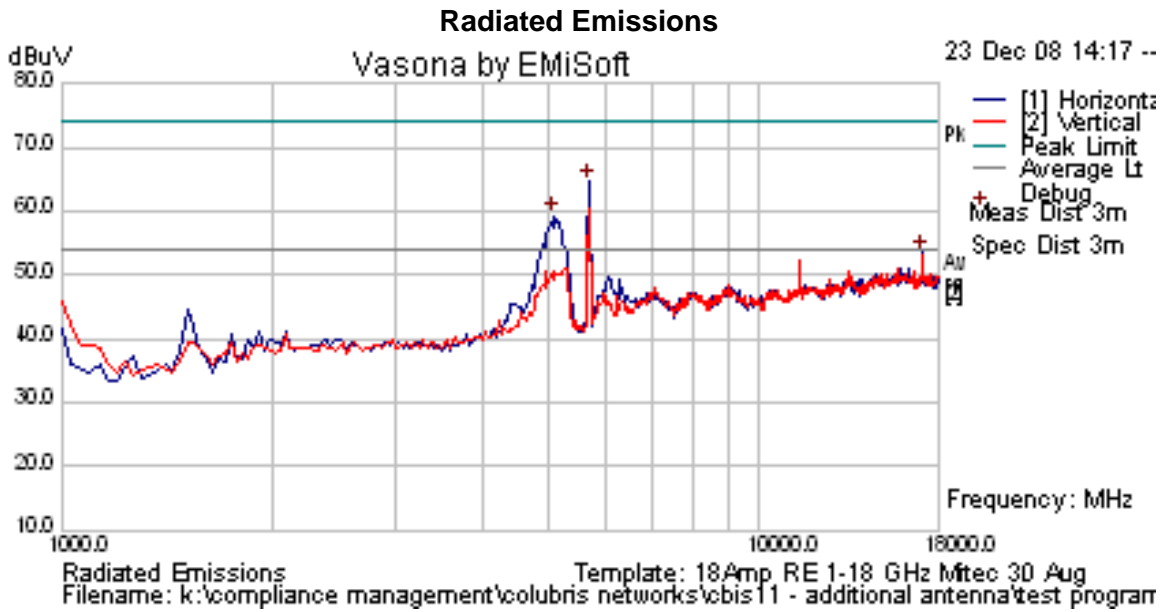

The above plot is peak emissions only

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 55 of 68


TABLE OF RESULTS – 802.11a, HT-40 13.5 MCS Channel 5,510 MHz

Maximum Power

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
7346.698	53.67	5.45	-3.02	56.1	Peak Max	H	104	38	74	-17.9	Pass	RB
7346.698	49.89	5.45	-3.02	52.32	Average Max	H	104	38	54	-1.68	Pass	RB

Band-edge – Restricted Bands  
 RB – Restricted Band  
 NRB – Non-Restricted Band

Radiated Emissions

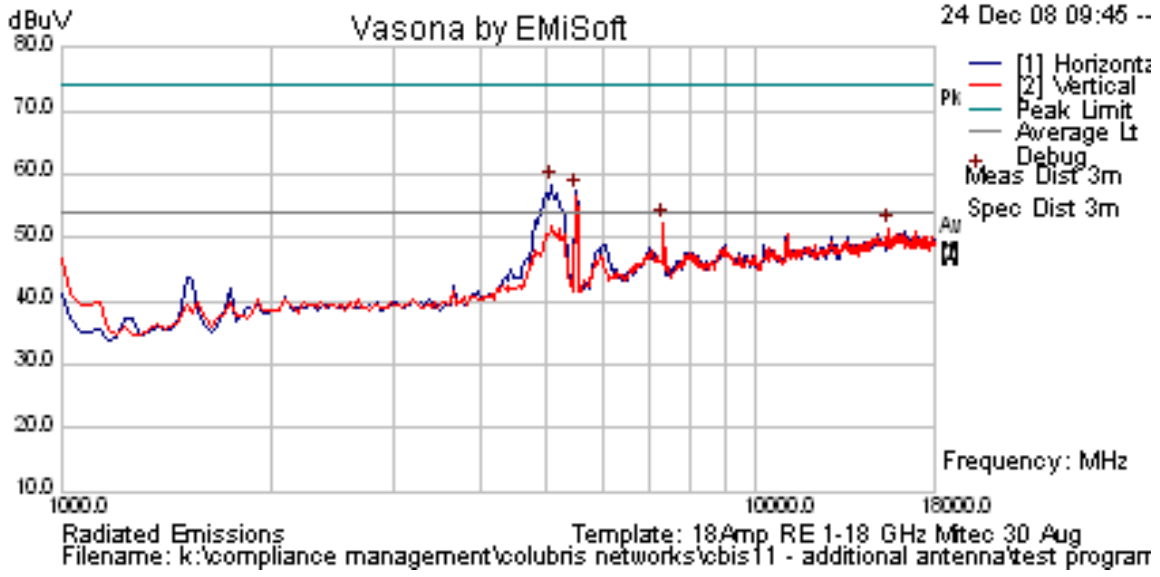

The above plot is peak emissions only

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 56 of 68

TABLE OF RESULTS – 802.11a, HT-40 13.5 MCS Channel 5,620 MHz

Maximum Power

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
7493.317	55.73	5.48	-3.79	57.41	Peak Max	H	135	321	74	-16.59	Pass	RB
11237.996	50.24	6.88	-1.43	55.69	Peak Max	H	101	311	74	-18.31	Pass	RB
7493.318	41.43	5.48	-3.79	43.11	Average Max	H	136	321	54	-10.89	Pass	RB
11237.996	36.25	6.88	-1.43	41.7	Average Max	H	101	311	54	-12.3	Pass	RB

Band-edge – Restricted Bands  
 RB – Restricted Band  
 NRB – Non-Restricted Band

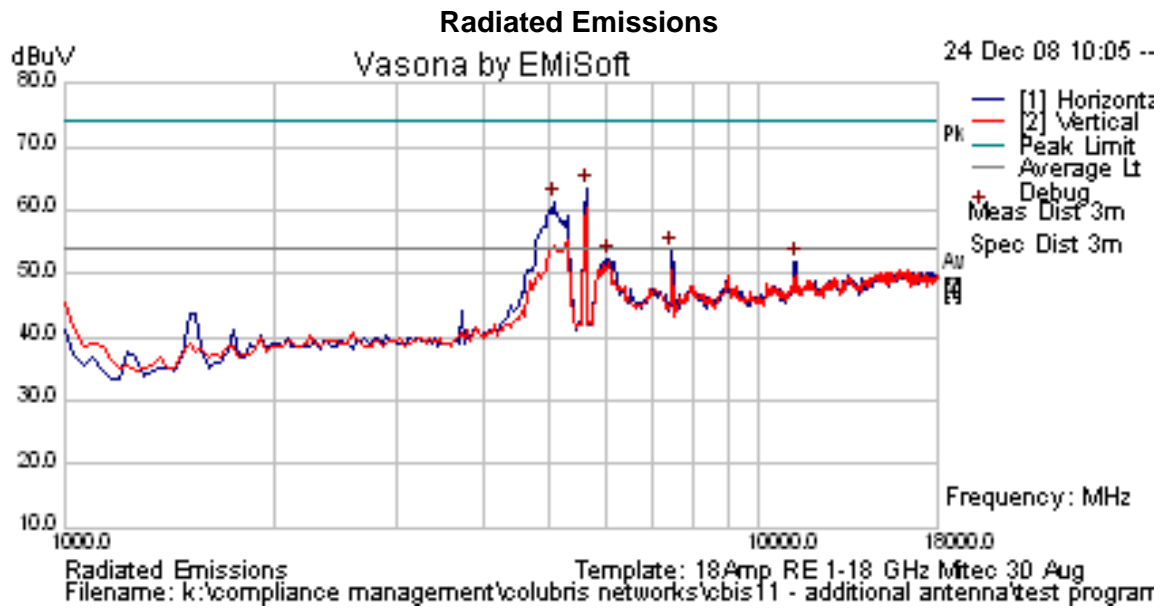

The above plot is peak emissions only

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 57 of 68


TABLE OF RESULTS – 802.11a, HT-40 13.5 MCS Channel 5,690 MHz

Maximum Power

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments

No emissions found within 6 dB of the limit line

Band-edge – Restricted Bands  
 RB – Restricted Band  
 NRB – Non-Restricted Band

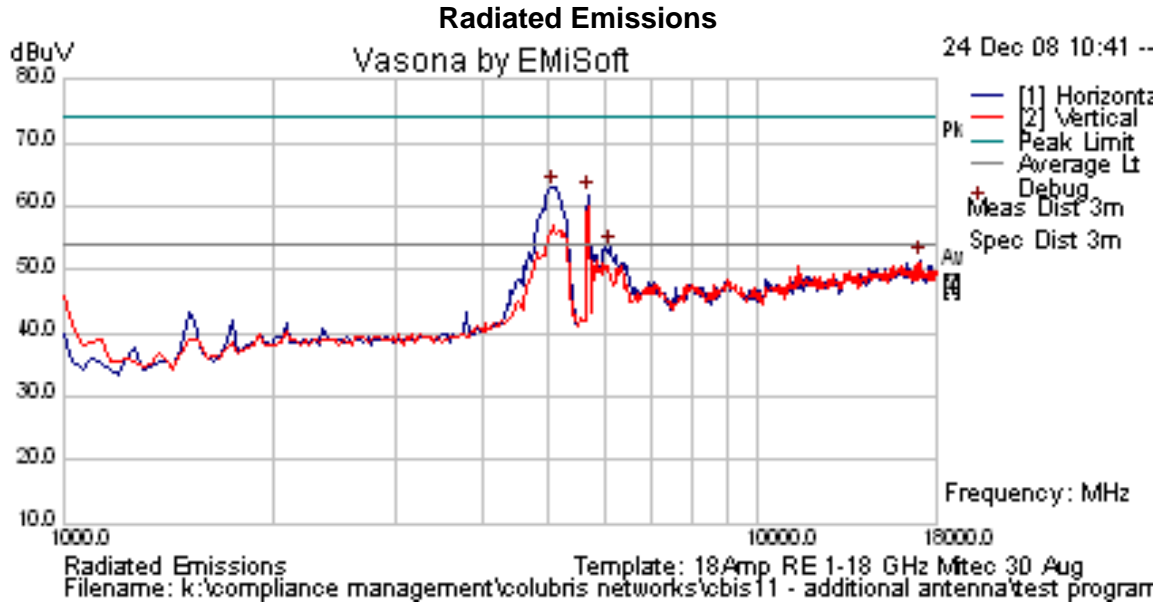

The above plot is peak emissions only

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Specification**  
**Limits**

**15.407 (b)(2).** All emissions outside of the 5,150-5,350MHz band shall not exceed an EIRP of -27dBm/MHz.

**§15.205 (a)** Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

**§15.205 (a)** Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

**§15.209 (a)** Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

**RSS-210 §A9.3(2)** For transmitters operating in the 5250-5350 MHz band, all emissions outside the 5150-5350 MHz band shall not exceed -27 dBm/MHz e.i.r.p. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band shall not exceed out of band emission limit of 27 dBm/MHz e.i.r.p. in the 5150-5250 MHz band in order to operate indoor/outdoor, or alternatively shall comply with the spectral power density for operation within the 5150-5250 MHz band and shall be labeled “for indoor use only”.

**RSS-Gen §4.7** The search for unwanted emissions shall be from the lowest frequency internally generated or used in the device (local oscillator, intermediate of carrier frequency), or from 30 MHz, whichever is the lowest frequency, to the 5<sup>th</sup> harmonic of the highest frequency generated without exceeding 40 GHz.

**RSS-Gen §6** Receiver Spurious Emission Standard

If a radiated measurement is made, all spurious emissions shall comply with the limits of the following Table. The resolution bandwidth of the spectrum analyzer shall be 100 kHz for spurious emission measurements below 1.0 GHz and 1.0 MHz for measurements above 1.0 GHz

**§15.209 (a)** Limit Matrix

Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 59 of 68

---

**Laboratory Measurement Uncertainty for Radiated Emissions**

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

**Traceability**

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### 5.1.2.2. Receiver Radiated Spurious Emissions (above 1 GHz)

#### Industry Canada RSS-Gen §4.8, §6


#### Test Procedure

Radiated emissions above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned.

All measurements on any frequency or frequencies over 1 MHz are based on the use of measurement instrumentation employing an average detector function. All measurements above 1 GHz were performed using a minimum resolution bandwidth of 1 MHz.

All Sectors of the EUT were tested simultaneously

#### Test Measurement Set up

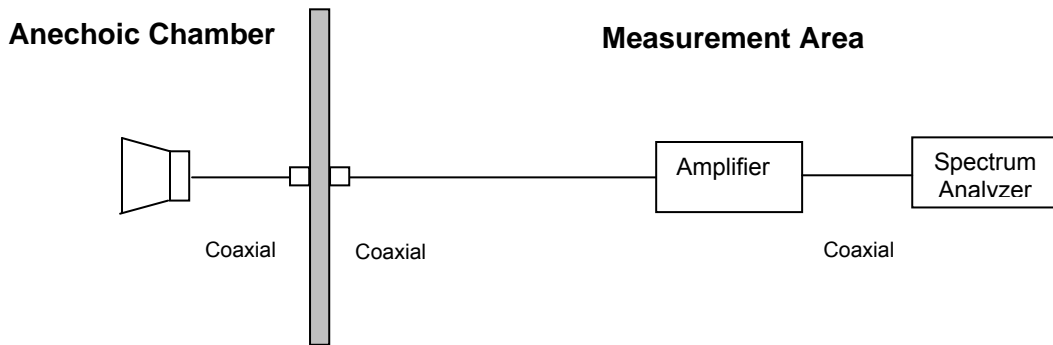

Measurement set up for Radiated Emission Test

#### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where: FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 61 of 68

---

For example:

Given receiver input reading of 51.5 dB $\mu$ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB $\mu$ V/m (or dB $\mu$ V) and  $\mu$ V/m (or  $\mu$ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu\text{V/m}))}$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 62 of 68

**Receiver Radiated Spurious Emissions above 1 GHz**  
**Channel 5180**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments

No emissions were found within 6 dB of the limit line

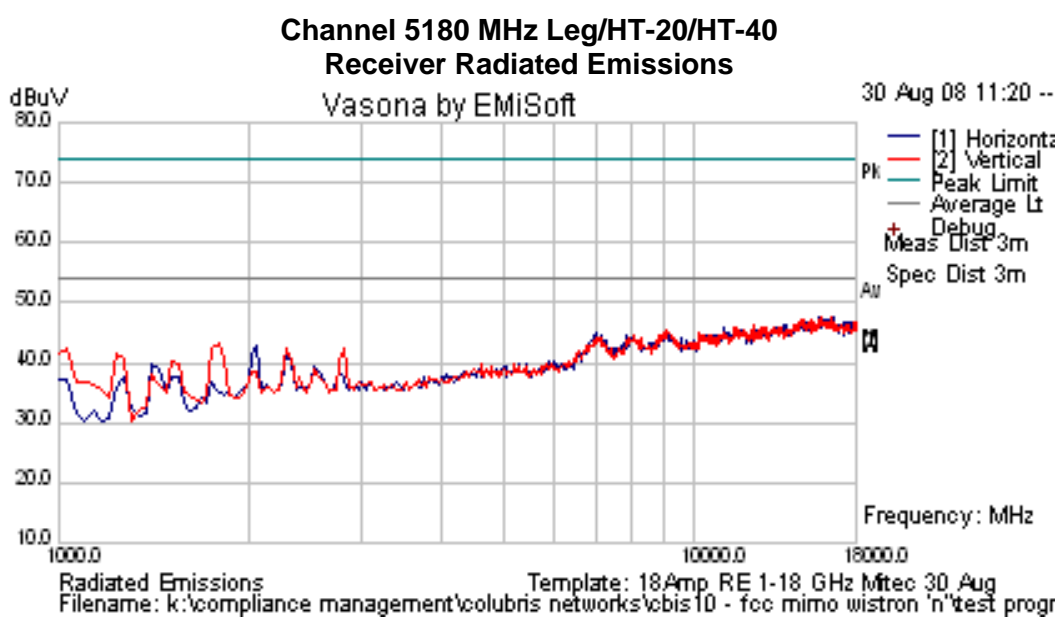

The above plot is peak emissions only

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 63 of 68

**Receiver Radiated Spurious Emissions above 1 GHz**

**Channel 5260**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments

No emissions were found within 6 dB of the limit line

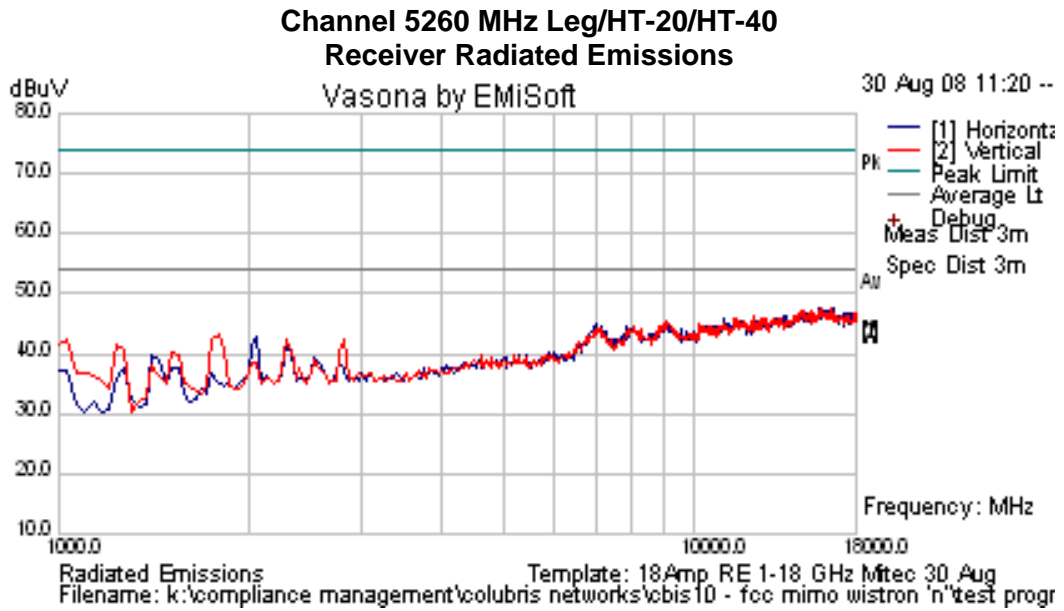

The above plot is peak emissions only

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 64 of 68


**Receiver Radiated Spurious Emissions above 1 GHz**

**Channel 5600**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Poi	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments

No emissions were found within 6 dB of the limit line

**Channel 5600 MHz Leg/HT-20/HT-40 Receiver Radiated Emissions**

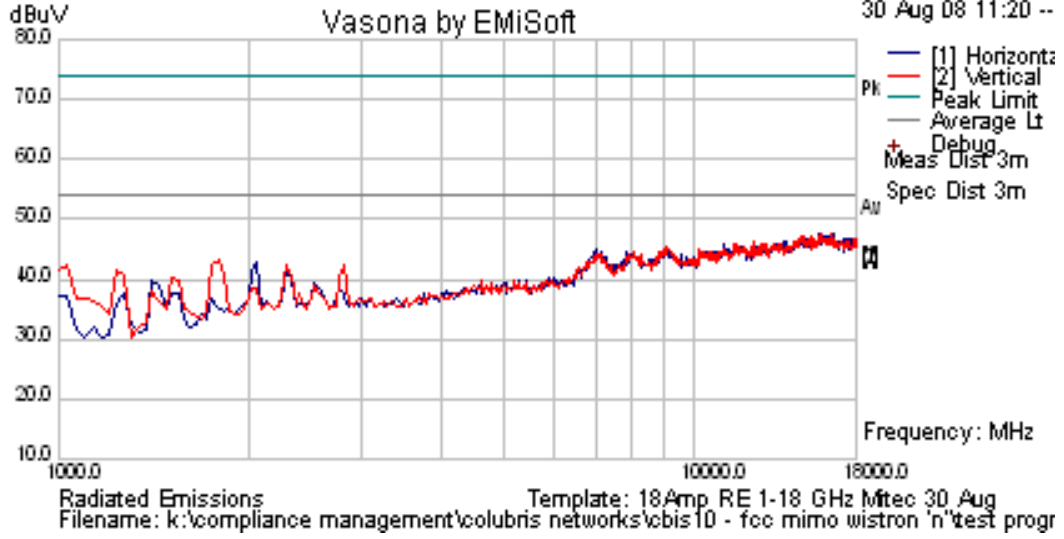

The above plot is peak emissions only

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## 6. PHOTOGRAPHS

### 6.1. Radiated Emissions > 1GHz



---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** Wistron 802.11 a/b/g/n Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD11-U2 Rev A  
**Issue Date:** 25th November 2009  
**Page:** 67 of 68

## 7. TEST EQUIPMENT DETAILS

Asset #	Instrument	Manufacturer	Part #	Serial #
0088	Spectrum Analyzer	Hewlett Packard	8564E	3410A00141
0134	Amplifier	Com Power	PA 122	181910
0158	Barometer /Thermometer	Control Co.	4196	E2846
0193	EMI Receiver	Rhode & Schwartz	ESI 7	838496/007
0252	SMA Cable	Megaphase	Sucoflex 104	None
0310	2m SMA Cable	Micro-Coax	UFA210A-0-0787-3G03G0	209089-001
0312	3m SMA Cable	Micro-Coax	UFA210A-1-1181-3G0300	209092-001
0313	Coupler	Hewlett Packard	86205A	3140A01285
0314	30dB N-Type Attenuator	ARRA	N9444-30	1623
0070	Power Meter	Hewlett Packard	437B	3125U11552
0116	Power Sensor	Hewlett Packard	8485A	3318A19694
0117	Power Sensor	Hewlett Packard	8487D	3318A00371
0184	Pulse Limiter	Rhode & Schwartz	ESH3Z2	357.8810.52
0190	LISN	Rhode & Schwartz	ESH3Z5	836679/006
0293	BNC Cable	Megaphase	1689 1GVT4	15F50B001
0301	5.6 GHz Notch Filter	Micro-Tronics	RBC50704	001
0302	5.25 GHz Notch Filter	Micro-Tronics	BRC50703	002
0303	5.8 GHz Notch Filter	Micro-Tronics	BRC50705	003
0304	2.4GHzHz Notch Filter	Micro-Tronics	--	001
0307	BNC Cable	Megaphase	1689 1GVT4	15F50B002
0335	1-18GHz Horn Antenna	ETS- Lindgren	3117	00066580
0337	Amplifier	MiCOM Labs	--	--
0338	Antenna	Sunol Sciences	JB-3	A052907

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



440 Boulder Court, Suite 200  
Pleasanton, CA 94566, USA  
Tel: 1.925.462.0304  
Fax: 1.925.462.0306  
[www.micomlabs.com](http://www.micomlabs.com)