

Test of Hewlett Packard MRLBB-1303 Wireless  
Module

To: FCC 47 CFR Part 15.407 & IC RSS-210

Test Report Serial No.: HPWD41-U6 Rev B



# TEST REPORT

FROM



Test of Hewlett Packard MRLBB-1303 Wireless Module

to

To FCC 47 CFR Part 15.407 & IC RSS-210

Test Report Serial No.: HPWD41-U6 Rev B

Note: this report contains data with regard to the 5,150 - 5,250, 5,250 - 5,350 and 5,470 - 5,7250MHz frequency bands for Hewlett Packard, MRLBB-1303 Wireless Access module. 5.8 GHz test data is reported in MiCOM Labs test report HPWD41-U3

This report supersedes None

Applicant: Hewlett Packard  
8000 Foothills Blvd  
Roseville, 95947 California  
USA

Product Function: WLAN 802.11a/n/ac Module

Copy No: pdf Issue Date: 16th October 2013

**This Test Report is Issued Under the Authority of:**

**MiCOM Labs, Inc.**  
440 Boulder Court, Suite 200  
Pleasanton, CA 94566 USA  
Phone: +1 (925) 462-0304  
Fax: +1 (925) 462-0306  
[www.micomlabs.com](http://www.micomlabs.com)



TEST CERTIFICATE #2381.01

**MiCOM Labs is an ISO 17025 Accredited Testing Laboratory**



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 3 of 407

---

This page has been left intentionally blank

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## TABLE OF CONTENTS

<b>ACCREDITATION, LISTINGS &amp; RECOGNITION</b> .....	<b>5</b>
TESTING ACCREDITATION .....	5
RECOGNITION .....	6
PRODUCT CERTIFICATION .....	7
<b>1. TEST RESULT CERTIFICATE</b> .....	<b>9</b>
<b>2. REFERENCES AND MEASUREMENT UNCERTAINTY</b> .....	<b>10</b>
2.1. Normative References.....	10
2.2. Test and Uncertainty Procedures.....	11
<b>3. PRODUCT DETAILS AND TEST CONFIGURATIONS</b> .....	<b>12</b>
3.1. Technical Details.....	12
3.2. Scope of Test Program .....	13
3.3. Equipment Model(s) and Serial Number(s) .....	16
3.4. Antenna Details .....	16
3.5. Cabling and I/O Ports .....	16
3.6. Test Configurations .....	17
3.7. Equipment Modifications .....	19
3.8. Deviations from the Test Standard.....	19
3.9. Subcontracted Testing or Third Party Data .....	19
<b>4. TESTING EQUIPMENT CONFIGURATION(S)</b> .....	<b>20</b>
4.1. Conducted RF Emission Test Set-up .....	20
4.2. Radiated Spurious Emission Test Set-up > 1 GHz .....	21
4.3. Digital Emissions Test Set-up (0.03 – 1 GHz).....	22
4.4. ac Wireline Emission Test Set-up .....	23
<b>5. TEST SUMMARY</b> .....	<b>24</b>
<b>6. TEST RESULTS</b> .....	<b>27</b>
6.1. Device Characteristics.....	27
6.1.1. <i>Conducted Testing</i> .....	27
6.1.2. <i>Radiated Emission Testing</i> .....	85
6.1.3. <i>AC Wireline Conducted Emissions (150 kHz – 30 MHz)</i> .....	116
6.1.4. <i>Dynamic Frequency Selection (DFS)</i> .....	119
<b>7. PHOTOGRAPHS</b> .....	<b>163</b>
7.1. Test Setup - Conducted .....	163
7.2. <b>Test Setup - Digital and Spurious Emissions Configuration</b> .....	164
7.3. 164	
7.4. Dynamic Frequency Selection (DFS).....	165
<b>8. TEST EQUIPMENT DETAILS</b> .....	<b>166</b>
<b>APPENDIX</b> .....	<b>167</b>
<b>A. SUPPORTING INFORMATION</b> .....	<b>167</b>
A.1. CONDUCTED TEST PLOTS .....	167
A.1.1. <i>26 dB &amp; 99% Bandwidth</i> .....	168
A.1.2. <i>Peak Power Spectral Density</i> .....	276
A.1.3. <i>Peak Excursion Ratio</i> .....	392

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## ACCREDITATION, LISTINGS & RECOGNITION

### TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard EN ISO/IEC 17025. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 6 of 407

## **RECOGNITION**

MiCOM Labs, Inc has widely recognized Electrical testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA\*\* countries. Our test reports are widely accepted for global type approvals.

Country	Recognition Body	Status	Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Listing #: 102167
Canada	Industry Canada (IC)	FCB	APEC MRA 2	US0159 Listing #: 4143A-2
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	APEC MRA 2	RCB 210
	VCCI	--	--	A-0012
Europe	European Commission	NB	EU MRA	NB 2280
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	CAB	APEC MRA 1	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	CAB	APEC MRA 1	
Singapore	Infocomm Development Authority (IDA)	CAB	APEC MRA 1	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

\*\*APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

N/A – Not Applicable

\*\*EU MRA – European Union Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the EU member countries.

\*\*NB – Notified Body

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 7 of 407

## **PRODUCT CERTIFICATION**

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard EN ISO/IEC Guide 65. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



**USA Telecommunication Certification Body (TCB)** - TCB Identifier – US0159

**Industry Canada Certification Body** - CAB Identifier – US0159

**European Notified Body** - Notified Body Identifier - 2280

**Japan – Recognized Certification Body (RCB)** - RCB Identifier - 210

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 8 of 407

---

## DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft	13 <sup>th</sup> September 2013	
Rev A	1 <sup>st</sup> October 2013	Initial release
Rev B	16 <sup>th</sup> October 2013	Implemented FCC KDB 644545 "Guidance for IEEE 802.11ac and Pre-ac Device Emissions Testing"

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 9 of 407

## 1. TEST RESULT CERTIFICATE

Applicant:	Hewlett Packard 8000 Foothills Blvd Roseville, 95947 California USA	Tested By:	MiCOM Labs, Inc. 440 Boulder Court Suite 200 Pleasanton California, 94566, USA
EUT:	WLAN 802.11a/n/ac Module	Tel:	+1 925 462 0304
Model:	MRLBB-1303	Fax:	+1 925 462 0306
S/N:	Not Available		
Test Date(s):	18th June - 16th October 2013	Website:	www.micomlabs.com


STANDARD(S)	TEST RESULTS
FCC 47 CFR Part 15.407 & IC RSS-210	EQUIPMENT COMPLIES


MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

### Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:

  
\_\_\_\_\_  
Graeme Grieve  
Quality Manager MiCOM Labs,

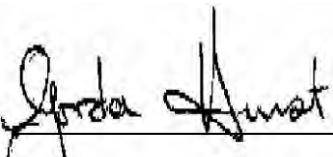  
\_\_\_\_\_  
Gordon Hurst  
President & CEO MiCOM Labs, Inc.



TESTING CERTIFICATE #2381.01

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## **2. REFERENCES AND MEASUREMENT UNCERTAINTY**

### **2.1. Normative References**

<b>Ref.</b>	<b>Publication</b>	<b>Year</b>	<b>Title</b>
<b>(i)</b>	FCC 47 CFR Part 15.407	2012	Code of Federal Regulations
<b>(ii)</b>	FCC 06-96	June 2006	Memorandum Opinion and Order
<b>(iii)</b>	FCC OET KDB 662911	4 <sup>th</sup> April 2011	Emissions Testing of Transmitters with Multiple Outputs in the Same Band
<b>(iv)</b>	Industry Canada RSS-210	2010	Low Power License-Exempt Radiocommunication Devices (All Frequency Bands): Category 1 Equipment
<b>(v)</b>	Industry Canada RSS-Gen	2010	General Requirements and Information for the Certification of Radiocommunication Equipment
<b>(vi)</b>	ANSI C63.4	2009	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
<b>(vii)</b>	CISPR 22/ EN 55022	2008 2006+A1:2007	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
<b>(viii)</b>	M 3003	Edition 1 Dec. 1997	Expression of Uncertainty and Confidence in Measurements
<b>(ix)</b>	LAB34	Edition 1 Aug 2002	The expression of uncertainty in EMC Testing
<b>(x)</b>	ETSI TR 100 028	2001	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
<b>(xi)</b>	A2LA	July 2012	Reference to A2LA Accreditation Status – A2LA Advertising Policy
<b>(xii)</b>	FCC Public Notice – DA 02-2138	2002	Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 11 of 407

---

## **2.2. Test and Uncertainty Procedures**

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 12 of 407

### 3. PRODUCT DETAILS AND TEST CONFIGURATIONS

#### 3.1. Technical Details

Details	Description
Purpose:	Test of the Hewlett Packard MRLBB-1303 Wireless Module in the frequency range 5,150 - 5,250, 5,250 – 5,350 and 5,470 - 5725 MHz to FCC Part 15.407 and Industry Canada RSS-210 regulations.
Applicant:	Hewlett Packard 8000 Foothills Blvd Roseville, 95947 California, USA
Manufacturer:	As applicant
Laboratory performing the tests:	MiCOM Labs, Inc. 440 Boulder Court, Suite 200 Pleasanton, California 94566 USA
Test report reference number:	HPWD41-U6 Rev B
Date EUT received:	12 <sup>th</sup> June 2013
Standard(s) applied:	FCC 47 CFR Part 15.407 & IC RSS-210
Dates of test (from - to):	18th June - 16th October 2013
No of Units Tested:	One
Type of Equipment:	802.11a/n/ac Wireless Access Point 3x3 Spatial Multiplexing MIMO configuration
Applicants Trade Name:	Wireless Access Point
Model(s):	MRLBB-1303
Location for use:	Indoor only
Declared Frequency Range(s):	5,150 – 5,250, 5250 – 5,350 and 5,470 – 5,725 MHz
Hardware Rev	LP2
Software Rev	LSDK 10.1.357
Type of Modulation:	Per 802.11 – OFDM
EUT Modes of Operation:	802.11a, 802.11n HT-20, HT-40, VHT-40, VHT-80
Declared Nominal Output Power: (Average Power)	802.11a Legacy, HT-20: +20 dBm 802.11n: HT-40/VHT-40 +20 dBm 802.11n: VHT-80 +20 dBm
Transmit/Receive Operation:	Time Division Duplex
Rated Input Voltage and Current:	3.3 Vdc ±10%
Operating Temperature Range:	Declared range 0° to +55°C
ITU Emission Designator:	802.11a 16M9D1D 802.11n HT-20 18M0D1D 802.11n HT-40 36M5D1D 802.11ac-40 36M5D1D 802.11ac-80 76M6D1D
Equipment Dimensions:	50mm wide, 55.8mm length, 4mm thick
Weight:	0.40 ounces
Primary function of equipment:	Wireless Access Point for transmitting data and voice.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 13 of 407

---

### 3.2. Scope of Test Program

#### **Hewlett Packard MRLBB-1303 Wireless Module RF Testing**

The scope of the test program was to test the Hewlett Packard MRLBB-1303 Wireless LAN Access Point, 3X3 Spatial Multiplexing MIMO configurations in the frequency range 5,150 - 5,250, 5,250 – 5,350 and 5,470 – 5,725 MHz for compliance against FCC 47 CFR Part 15.407 and Industry Canada RSS-210 specifications.

#### **FCC OET KDB Implementation**

This test program implements the following FCC KDB – 662911 4/4/2011;

#### ***Emissions Testing of Transmitters with Multiple Outputs in the Same Band***

The KDB document provides guidance for measurements of conducted output emissions of devices that employ a single transmitter with multiple outputs in the same band, with the outputs occupying the same or overlapping frequency ranges. It applies to EMC compliance measurements on devices that transmit on multiple antennas simultaneously in the same or overlapping frequency ranges through a coordinated process. Examples include, but are not limited to, devices employing beam forming or multiple-input and multiple-output (MIMO.) This guidance applies to both licensed and unlicensed devices wherever the FCC rules call for conducted output measurements. Guidance is provided for in-band, out-of-band and spurious emission measurements.

This guidance does not apply to the multiple transmitters included in a composite device, such as a device that combines an 802.11 modem with a cell phone in one enclosure with each driving its own antenna.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


Hewlett Packard Inc  
MRLBB-1303 802.11 a/n/ac Wireless Module



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Hewlett Packard Inc  
MRLBB-1303 802.11 a/n/ac Wireless Module

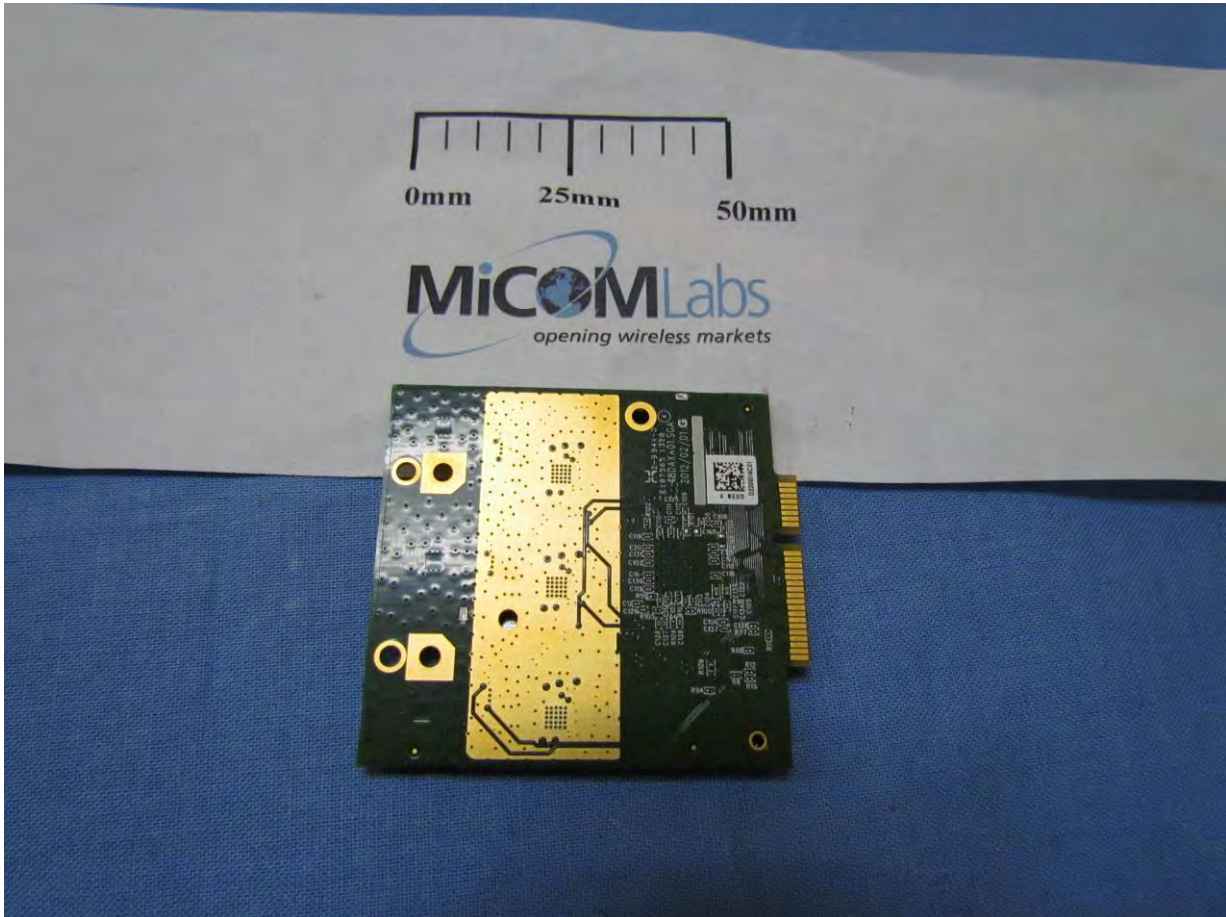

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 16 of 407

### 3.3. Equipment Model(s) and Serial Number(s)

Equipment Type	Equipment Description (Including Brand Name)	Mfr	Model No.	Serial No.
EUT	Wireless LAN Access Point	Hewlett Packard	MRLBB-1303	Not Available
Support	Laptop PC	IBM	Thinkpad	None

### 3.4. Antenna Details

Model	Type	Gain	Freq. Band	Note
		dBi	MHz	
5184-6684	PIFA	7.4	5150 - 5350	
5184-6684	PIFA	7.81	5470 - 5725	
5184-6684	PIFA	7.79	5725 - 5850	

### 3.5. Cabling and I/O Ports

Number and type of I/O ports

1. 3 x u.FL RF connectors

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 3.6. Test Configurations

Testing was performed to determine the highest power level versus bit rate. The variant with the highest power was used to exercise the product.

Matrix of test configurations

Operational Mode(s) (802.11)	Variant	Data Rates with Highest Power	Frequencies (MHz)
5150-5250	802.11a	6 MBit/s	5180, 5200, 5240
	HT-20	6.5 MBit/s	
	HT-40	13.5 MBit/s	5190, 5230
	VHT-40		
	VHT-80	29.3 MBit/s	5,210
5250-5350 5470-5725	802.11a	6 MBit/s	5260,5280,5300,5320 5500,5580,5720*
	802.11n HT-20	6.5 MBit/s	
	802.11n HT-40	13.5 MBit/s	5270,5310 5510,5550,5710*
	VHT-40		
	VHT-80	29.3 MBit/s	5290 5530, 5690*

**\*Note:** Testing 802.11 a, n (HT-20, HT-40), VHT-40, VHT-80 all straddles the 5725 MHz band-edge. This is recognized by the FCC and is covered under FCC KDB 644545 Guidance for 802.11ac and Pre-ac Device Emission Testing



**Spurious Emission and Band-Edge Test Strategy**  
**Bands 5,150 – 5250**

11a	11n HT-20	11n HT-40	11ac-40	11ac-80
SE 5180	SE 5180	SE 5190	SE 5190	SE 5210
SE 5200	SE 5200			
SE 5240	SE 5240	SE 5230	SE 5230	
BE 5150	BE 5150	BE 5150	BE 5150	BE 5150

**Bands 5,250 – 5,350**

11a	11n HT-20	11n HT-40	11ac-40	11ac-80
SE 5260	SE 5260	SE 5270	SE 5270	SE 5290
SE 5300	SE 5300			
SE 5320	SE 5320	SE 5310	SE 5310	
BE 5350	BE 5350	BE 5350	BE 5350	BE 5350

**Band 5,470 – 5,725**

11a	11n HT-20	11n HT-40	11ac-40	11ac-80
SE 5500	SE 5500	SE 5510	SE 5510	SE 5530
SE 5580	SE 5580	SE 5550	SE 5550	
SE 5720	SE 5720	SE 5710	SE 5710	SE 5690
BE 5470	BE 5470	BE 5470	BE 5470	BE 5470

KEY:-  
SE – Spurious Emissions  
BE – Band-Edge



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 19 of 407

---

### **3.7. Equipment Modifications**

The following modifications were required to bring the equipment into compliance:

1. NONE

### **3.8. Deviations from the Test Standard**

The following deviations from the test standard were required in order to complete the test program:

1. NONE

### **3.9. Subcontracted Testing or Third Party Data**

1. NONE

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## 4. TESTING EQUIPMENT CONFIGURATION(S)


### 4.1. Conducted RF Emission Test Set-up

The following tests were performed using the conducted test set-up shown in the diagram below.

1. Section 6.1.1.1. 26 dB and 99% Bandwidth
2. Section 6.1.1.2. Maximum Conducted Output Power
3. Section 6.1.1.3. Peak Power Spectral Density
4. Section 6.1.1.4. Peak Excursion Ratio

#### Conducted Test Set-Up Pictorial Representation

3 - Port Test Configuration

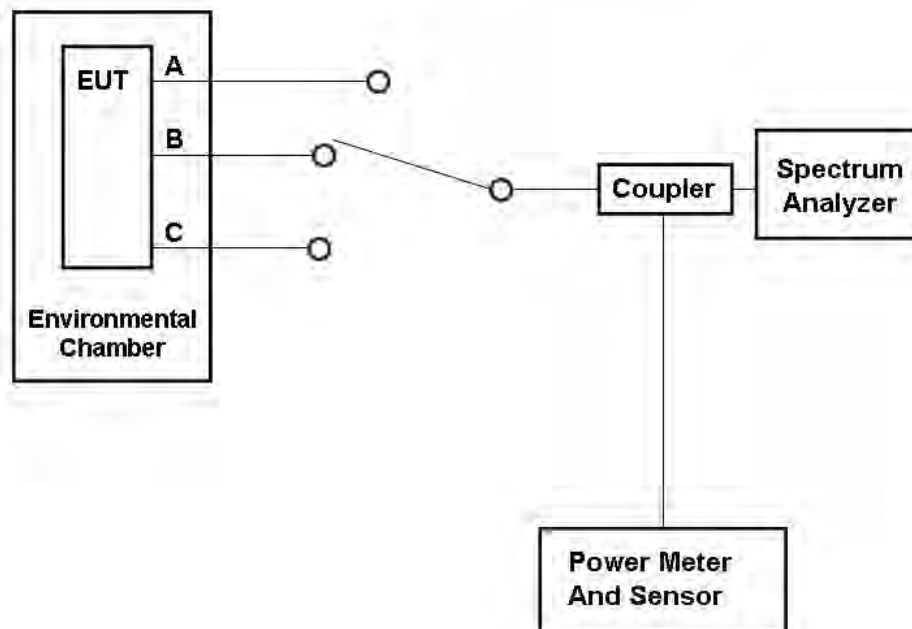


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

#### 4.2. Radiated Spurious Emission Test Set-up > 1 GHz

The following tests were performed using the conducted test set-up shown in the diagram below.

1. Section 6.1.2.1 through 12

#### Radiated Emission Measurement Setup – Above 1 GHz

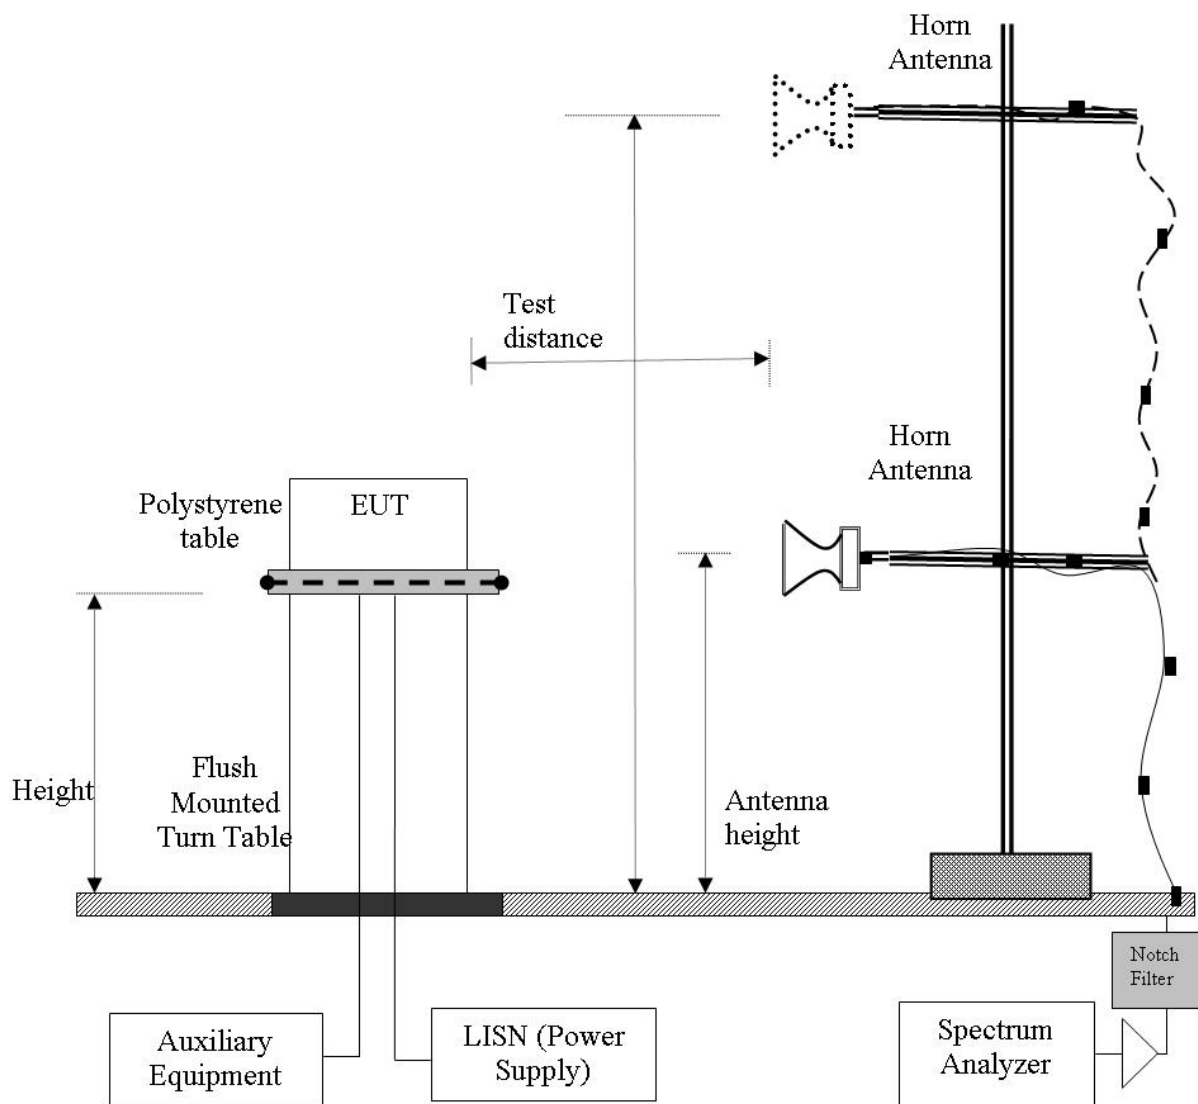


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### 4.3. Digital Emissions Test Set-up (0.03 – 1 GHz)

The following tests were performed using the conducted test set-up shown in the diagram below.

2. Section 6.1.2.13

#### Digital Emission Measurement Setup – Below 1 GHz

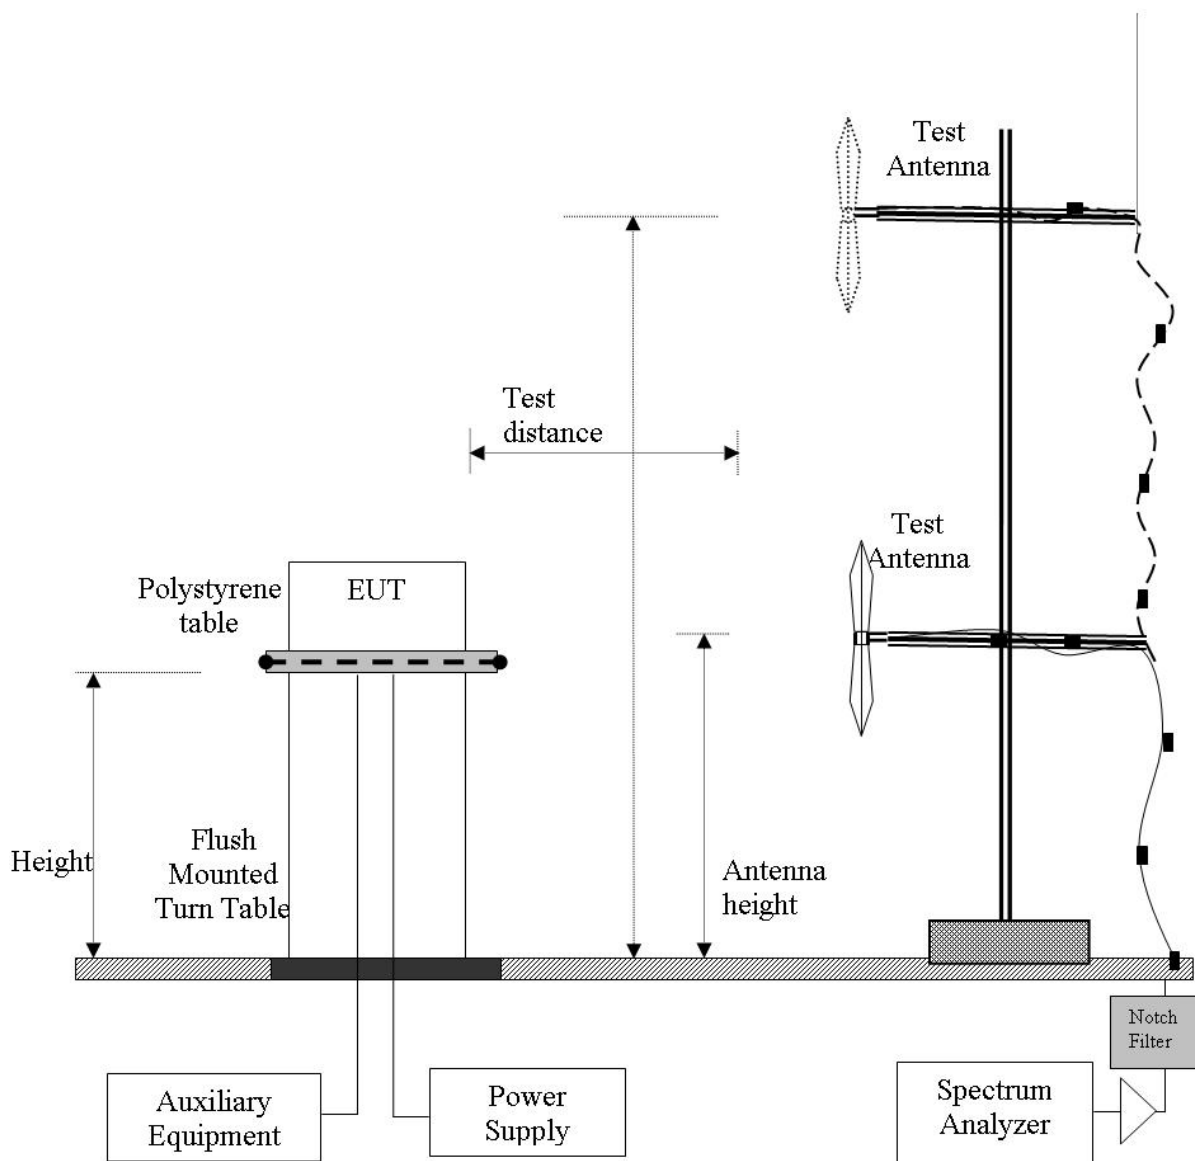

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




#### 4.4. ac Wireline Emission Test Set-up

The following tests were performed using the conducted test set-up shown in the diagram below.

1. Section 6.1.3 ac Wireline Conducted Emissions

#### Conducted Test Set-Up Pictorial Representation

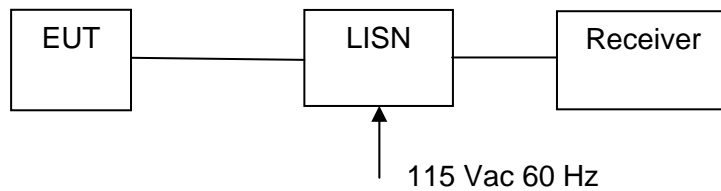

Measurement set up for ac Wireline Conducted Emissions Test



## 5. TEST SUMMARY

### List of Measurements

The following table represents the list of measurements required under the **FCC CFR47 Part 15.407** and **Industry Canada RSS-210** and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
<b>15.407(a)</b> <b>A9.2(2)</b> <b>4.4</b>	26dB and 99% Emission BW	Emission bandwidth measurement	Conducted	Complies	6.1.1.1 A.1.1
<b>15.407(a)</b> <b>A9.2(2)</b> <b>4.6</b>	Maximum Conducted Output Power	Power Measurement	Conducted	Complies	6.1.1.2
<b>15.407(a)</b> <b>A9.2(2)</b>	Peak Power Spectral Density	PPSD	Conducted	Complies	6.1.1.3 A.1.2
<b>15.407(a)(6)</b>	Peak Excursion Ratio	<13dB in any 1MHz bandwidth	Conducted	Complies	6.1.1.4 A.1.3
<b>15.407(g)</b> <b>15.31</b> <b>2.1</b> <b>4.5</b>	Frequency Stability	Limits: contained within band of operation at all times.	Applicant declaration	Complies	6.1.1.5
<b>15.407(f)</b> <b>5.5</b>	Radio Frequency Radiation Exposure	Exposure to radio frequency energy levels, Maximum Permissible Exposure (MPE)	Conducted	See included MPE exhibit	--

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**List of Measurements (continued)**

The following table represents the list of measurements required under the **FCC CFR47 Part 15.407** and **Industry Canada RSS-210** and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
<b>15.407(b)(2)</b> <b>15.205(a)</b> <b>15.209(a)</b> <b>2.2</b> <b>2.6</b> <b>A9.3(2)</b> <b>4.7</b>	Radiated Emissions		Radiated		6.1.2
	Transmitter Radiated Spurious Emissions	Emissions above 1 GHz		Complies	6.1.2.1 6.1.2.2 6.1.2.3
	Radiated Band Edge	Band edge results		Complies	6.1.2.1 6.1.2.2 6.1.2.3
<b>15.407(b)(6)</b> <b>15.205(a)</b> <b>15.209(a)</b> <b>2.2</b>	Radiated Emissions	Emissions <1 GHz (30M-1 GHz)		Complies	6.1.2.4
<b>15.407(b)(6)</b> <b>15.207</b> <b>7.2.2</b>	AC Wireline Conducted Emissions 150 kHz–30 MHz	Conducted Emissions	Conducted	Complies ac/dc adaptor only, POE not marketed with equipment	6.1.3

Note 1: Test results reported in this document relate only to the items tested

Note 2: The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria

Note 3: Section 3.7 Equipment Modifications highlights the equipment modifications that were required to bring the product into compliance with the above test matrix



## List of Measurements (cont'd)

### Dynamic Frequency Selection (DFS)

The following table represents the list of measurements required under the **FCC CFR47 Part 15.407(h)(2)** and **FCC Memorandum Opinion and Order FCC 06-96 (Compliance Measurement procedures for Unlicensed National Information Infrastructure devices operating in the 5250-5350 MHz and 5470-5725 MHz bands incorporating dynamic frequency selection)**.

### Tests performed on Master Device

Section	Test Items	Description	Condition	Result	Test Report Section
	DFS	Dynamic Frequency Selection	Conducted		6.1.4
7.8.1	Detection Bandwidth	UNII Detection Bandwidth	Conducted	Complies	
7.8.2.1	Performance Requirements Check	Initial Channel Availability Check Time	Conducted	Complies	
7.8.2.2		Radar Burst at the Beginning of the Channel Availability Check Time	Conducted	Complies	
7.8.2.3		Radar Burst at the End of the Channel Availability Check Time	Conducted	Complies	
7.8.3	In-Service Monitoring	In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period	Conducted	Complies	
7.8.4	Radar Detection	Statistical Performance Check	Conducted	Complies	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 27 of 407

## 6. TEST RESULTS

### 6.1. Device Characteristics

#### 6.1.1. Conducted Testing

##### 6.1.1.1. 26 dB and 99 % Bandwidth

Conducted Test Conditions for 26 dB and 99% Bandwidth			
<b>Standard:</b>	FCC CFR 47:15.407	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	26 dB and 99 % Bandwidth	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.407 (a)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	KDB 789033 - D01 DTS General UNII Test Procedures v01		

**Test Procedure for 26 dB and 99% Bandwidth Measurement**

The bandwidth at 26 dB and 99 % is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency. KDB 789033 Section 5.1 Emission Bandwidth was used in order to prove compliance. The Resolution Bandwidth was set to approximately 1% of the emission bandwidth.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 28 of 407

### Measurement Results for 26 dB and 99 % Operational Bandwidth(s)

#### Equipment Configuration for 26 dB & 99% Occupied Bandwidth

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5180.0	24.449	23.948	24.248	--	24.449	23.948		
5200.0	24.349	23.948	24.248	--	24.349	23.948		
5240.0	24.048	23.848	24.349	--	24.349	23.848		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5180.0	16.834	16.834	16.934	--	16.934	16.834		
5200.0	16.834	16.934	16.934	--	16.934	16.834		
5240.0	16.733	16.733	16.834	--	16.834	16.733		

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 29 of 407

**Equipment Configuration for 26 dB & 99% Occupied Bandwidth**

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6.5 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5180.0	24.950	24.549	25.351	--	25.351	24.549		
5200.0	25.150	24.148	25.351	--	25.351	24.148		
5240.0	25.050	24.349	25.251	--	25.251	24.349		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5180.0	18.036	17.936	17.936	--	18.036	17.936		
5200.0	17.936	17.936	17.936	--	17.936	17.936		
5240.0	18.036	17.836	17.936	--	18.036	17.836		

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 30 of 407

**Equipment Configuration for 26 dB & 99% Occupied Bandwidth**

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5190.0	48.898	46.894	49.098	--	49.098	46.894		
5230.0	48.497	47.695	48.297	--	48.497	47.695		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5190.0	36.473	36.473	36.473	--	36.473	36.473		
5230.0	36.473	36.473	36.473	--	36.473	36.473		

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 31 of 407

**Equipment Configuration for 26 dB & 99% Occupied Bandwidth**

<b>Variant:</b>	802.11ac-40	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5190.0	48.297	46.894	48.297	--	48.297	46.894		
5230.0	48.497	49.098	48.898	--	49.098	48.497		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5190.0	36.473	36.473	36.473	--	36.473	36.473		
5230.0	36.473	36.473	36.473	--	36.473	36.473		

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 32 of 407

**Equipment Configuration for 26 dB & 99% Occupied Bandwidth**

<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	29.3 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5210.0	100.601	101.002	100.200	--	101.002	100.200		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5210.0	76.152	76.152	76.553	--	76.553	76.152		

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 33 of 407

**Equipment Configuration for 26 dB & 99% Occupied Bandwidth**

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5260.0	24.549	24.248	24.649	--	24.649	24.248		
5300.0	24.349	24.048	24.850	--	24.850	24.048		
5320.0	24.349	22.946	24.248	--	24.349	22.946		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5260.0	16.934	16.934	16.834	--	16.934	16.834		
5300.0	16.934	16.934	16.934	--	16.934	16.934		
5320.0	16.934	16.733	16.934	--	16.934	16.733		

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 34 of 407

**Equipment Configuration for 26 dB & 99% Occupied Bandwidth**

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6.5 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5260.0	25.050	23.948	25.351	--	25.351	23.948		
5300.0	25.150	23.948	25.150	--	25.150	23.948		
5320.0	24.749	24.248	25.351	--	25.351	24.248		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5260.0	18.036	17.836	17.936	--	18.036	17.836		
5300.0	17.836	17.836	17.936	--	17.936	17.836		
5320.0	17.936	18.036	17.936	--	18.036	17.936		

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 35 of 407

**Equipment Configuration for 26 dB & 99% Occupied Bandwidth**

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5270.0	47.295	46.693	49.098	--	49.098	46.693		
5310.0	47.695	46.894	48.497	--	48.497	46.894		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5270.0	36.273	36.473	36.473	--	36.473	36.273		
5310.0	36.473	36.273	36.273	--	36.473	36.273		

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 36 of 407

**Equipment Configuration for 26 dB & 99% Occupied Bandwidth**

<b>Variant:</b>	802.11ac-40	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	144 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5270.0	47.896	47.695	48.697	--	48.697	47.695		
5310.0	47.295	47.094	48.297	--	48.297	47.094		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5270.0	36.273	36.473	36.273	--	36.473	36.273		
5310.0	36.273	36.473	36.473	--	36.473	36.273		

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 37 of 407

**Equipment Configuration for 26 dB & 99% Occupied Bandwidth**

<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	192 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5290.0	95.391	95.792	99.399	--	99.399	95.391		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5290.0	76.152	76.152	75.752	--	76.152	75.752		

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 38 of 407

**Equipment Configuration for 26 dB & 99% Occupied Bandwidth**

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5500.0	23.948	23.747	23.447	--	23.948	23.447		
5580.0	23.948	23.547	23.447	--	23.948	23.447		
5720.0	24.850	24.048	24.048	--	24.859	24.048		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5500.0	16.834	16.834	16.733	--	16.834	16.733		
5580.0	16.733	16.834	16.733	--	16.834	16.733		
5720.0	17.034	16.834	16.934	--	17.034	16.834		

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 39 of 407

**Equipment Configuration for 26 dB & 99% Occupied Bandwidth**

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6.5 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5500.0	24.950	24.048	24.449	--	24.950	18.437		
5580.0	24.449	24.449	24.248	--	24.449	24.248		
5720.0	24.749	24.248	24.148	--	24.749	24.148		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5500.0	17.936	17.936	17.936	--	17.936	17.936		
5580.0	17.936	17.936	17.836	--	17.936	17.836		
5720.0	16.834	16.834	16.834	--	16.834	16.834		

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 40 of 407

**Equipment Configuration for 26 dB & 99% Occupied Bandwidth**

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5510.0	47.695	46.493	47.495	--	47.695	46.493		
5550.0	47.695	46.693	47.094	--	47.695	46.693		
5710.0	47.695	49.098	47.495	--	49.098	47.495		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5510.0	36.273	36.273	36.273	--	36.273	36.273		
5550.0	36.273	36.273	36.273	--	36.273	36.273		
5710.0	36.473	36.473	36.473	--	36.473	36.473		

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 41 of 407

**Equipment Configuration for 26 dB & 99% Occupied Bandwidth**

<b>Variant:</b>	802.11ac-40	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5510.0	48.297	45.691	47.295	--	48.297	45.691		
5550.0	47.695	46.894	46.894	--	47.695	46.894		
5710.0	47.094	49.499	46.894	--	46.092	45.691		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5510.0	36.273	36.273	36.273	--	36.273	36.273		
5550.0	36.273	36.273	36.273	--	36.273	36.273		
5710.0	36.473	36.473	36.473	--	36.273	36.273		

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 42 of 407

**Equipment Configuration for 26 dB & 99% Occupied Bandwidth**

<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	192 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5530.0	<a href="#">96.593</a>	<a href="#">93.387</a>	<a href="#">95.792</a>	--	96.593	93.387		
5690.0	<a href="#">95.792</a>	<a href="#">93.788</a>	<a href="#">92.986</a>	--	95.792	92.986		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5530.0	<a href="#">75.752</a>	<a href="#">75.752</a>	<a href="#">75.752</a>	--	75.752	75.752		
5690.0	<a href="#">75.752</a>	<a href="#">76.152</a>	<a href="#">75.752</a>	--	76.152	75.752		

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 43 of 407

## Specification

### Limits

#### **FCC, Part 15 §15.407 (a)(1), (a)(2) and Industry Canada RSS-210 § A9.2(2)**

**(a)(1)** For the band 5.15-5.25 GHz the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or +4 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

**(a)(2)** For the 5.25-5.35 GHz band the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or +11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +11 dBm in any 1 megahertz band.

#### **Industry Canada RSS-Gen 4.4**

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

## Traceability

### Test Equipment Used

0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 44 of 407

### 6.1.1.2. Maximum Conducted Output Power

Conducted Test Conditions for Maximum Conducted Output Power			
<b>Standard:</b>	FCC CFR 47:15.407	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	Maximum Conducted Output Power	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.407 (a)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	KDB 789033 - D01 DTS General UNII Test Procedures v01		
<b>Test Procedure for Maximum Conducted Output Power Measurement</b>			
<p>Method PM (Measurement using an RF average power meter). Section C) 4) of KDB 789033 defines a methodology using an average wideband power meter. Measurements were made while the EUT was operating in a continuous transmission mode (100% duty cycle) at the appropriate center frequency. All cable losses and offsets were taken into consideration in the measured result. All operational modes and frequency bands were measured independently and the resultant calculated. For multiple outputs, the measurements were made simultaneously on each output port and summed in a linear fashion. This technique was used in order to prove compliance.</p>			

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





### Antenna Beam and Non-Beam Forming Power Levels

15. 407 (a)(1), (a) (2) Operation with directional antenna gains greater than 6 dBi.

If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. Further FCC KDB 662911 D01 Multiple Transmitter Output v01 requires that the gain of antennas transmitting the same data (legacy 802.11a mode) must be increased by  $10 * \log(N)$  when N is the number of antenna elements.

The MRLBB-1303 does not implement beam-forming

### Operating Frequency Band 5150-5250 MHz

#### 5150 – 5250 MHz Uncorrelated Operation (MIMO)

Antenna (dB)	Gain (dBi)	Max. Allowable Conducted Peak Power (dBm)		Maximum EIRP dBm
		Uncorrelated	Per Chain	
Integral	7.4	+15.6	+10.83	+23.0

#### 5150 – 5250 MHz Correlated Operation (Non-MIMO i.e. Legacy)

Antenna dB	Gain dBi	Antenna Gain Increase V's No. Antenna Ports		Total Gain dBi	Max. Allowable Conducted Peak Power Per Chain dBm	Maximum EIRP dBm
		Ports	dB			
Integral	7.4	3	4.77	12.17	+10.83	+23.0



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 46 of 407

**Operating Frequency Band 5250 - 5350 and 5470 – 5725 MHz**

**5250 – 5350 and 5470 – 5725 MHz Uncorrelated Operation (MIMO)**

Antenna	Gain	Max. Allowable Conducted Peak Power (dBm)		Maximum EIRP
		Uncorrelated	Per Chain	
(dB)	(dBi)			dBm
Integral	7.8	+22.20	+17.43	+30.0

**5250 – 5350 and 5470 – 5725 MHz Correlated Operation (Non-MIMO i.e. Legacy)**

Antenna	Gain	Antenna Gain Increase V's No. Antenna Ports		Total Gain	Max. Allowable Conducted Peak Power Per Chain	Maximum EIRP
		Ports	dB			
dB	dBi			dBi	dBm	dBm
Integral	7.8	3	4.77	12.57	+17.43	+23.0

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Maximum Transmit (Conducted) Power, FCC Limits and Industry Canada Limits**

**Bands 5150 – 5250 MHz**

**FCC Limits**

Conducted Power Limit lesser of: 50 mW or 4 dBm + 10 log (B) dBm. B is the 26 dB emission bandwidth in MHz.

Mode	Frequency Range (MHz)	Minimum 26 dB Bandwidth (MHz)	4 + 10 Log (B) (dBm)	Limit (dBm)
a	5150 – 5250	24.4	+17.8	+17.00
HT-20		25.4	+18.0	+17.00
HT-40		49.1	+20.9	+17.00
VCT-40		48.9	+20.9	+17.00
VCT-80		101.0	24.0	+17.00

**Industry Canada Limits**

EIRP Limit 5150 – 5250 MHz: Lesser of 200 mW (+23 dBm) or 10 + 10 Log (B) dBm. B is the 99% emission bandwidth in MHz.

Mode	Frequency Range (MHz)	Minimum 99 % Bandwidth (MHz)	10 + 10 Log (B) (dBm)	EIRP Limit (dBm)
a	5150 – 5250	16.9	16.3	+22.3
HT-20		18.0	22.6	+22.6
HT-40		36.5	25.6	+23.0
VCT-40		36.5	25.6	+23.0
VCT-80		76.6	28.8	+23.0



### FCC Limits

#### Bands 5250 – 5350

Limit lesser of: 250 mW or 11 dBm + 10 log (B) dBm.

Mode	Frequency Range (MHz)	Maximum 26 dB Bandwidth (MHz)	11 + 10 Log (B) (dBm)	Limit (dBm)
a	5250 – 5350 5470 – 5725	24.9	25.0	+24.0
HT-20		25.4	25.0	+24.0
HT-40		49.1	27.9	+24.0
VCT-40		48.7	27.9	+24.0
VCT-80		99.4	31.0	+24.0

### Industry Canada Limits

#### Bands 5250 – 5350

Limit lesser of: 250 mW or 11 dBm + 10 log (B) dBm.

Mode	Frequency Range (MHz)	99% Bandwidth (MHz)	11 + 10 Log (B) (dBm)	Limit (dBm)
a	5250 – 5350 5470 – 5725	16.9	23.3	+23.3
HT-20		18.0	23.6	+23.5
HT-40		36.5	26.6	+24.0
VCT-40		36.4	26.6	+24.0
VCT-80		76.2	29.8	+24.0

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### FCC Limits

#### Bands 5470 – 5725 MHz

Limit lesser of: 250 mW or 11 dBm + 10 log (B) dBm.

Mode	Frequency Range (MHz)	Maximum 26 dB Bandwidth (MHz)	11 + 10 Log (B) (dBm)	Limit (dBm)
a	5250 – 5350 5470 – 5725	24.6	24.9	+24.0
HT-20		25.0	25.0	+24.0
HT-40		47.7	27.8	+24.0
VCT-40		48.3	27.8	+24.0
VCT-80		96.6	30.8	+24.0

### Industry Canada Limits

#### Bands 5470 – 5725 MHz

Limit lesser of: 250 mW or 11 dBm + 10 log (B) dBm.

Mode	Frequency Range (MHz)	99% Bandwidth (MHz)	11 + 10 Log (B) (dBm)	Limit (dBm)
a	5250 – 5350 5470 – 5725	16.9	23.3	+23.3
HT-20		17.9	23.5	+23.5
HT-40		36.3	26.6	+24.0
VCT-40		36.3	26.6	+24.0
VCT-80		76.2	29.8	+24.0

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 50 of 407

### Frequency Band 5150 – 5250 MHz

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6 MBit/s	<b>Antenna Gain (dBi):</b>	7.40
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power Σ Port(s) dBm	Minimum 26 dB Bandwidth MHz	Limit dBm	Margin dBm	EUT Power Setting
	a	b	c	d					
5180.0	9.29	9.67	8.47	--	13.94	23.948	15.60	-3.06	9.00
5200.0	9.36	9.74	8.71	--	14.06	23.948	15.60	-2.94	9.00
5240.0	9.74	9.92	8.78	--	14.28	23.848	15.60	-2.72	9.00

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6.5 MBit/s	<b>Antenna Gain (dBi):</b>	7.40
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power Σ Port(s) dBm	Minimum 26 dB Bandwidth MHz	Limit dBm	Margin dBm	EUT Power Setting
	a	b	c	d					
5180.0	9.28	9.42	8.45	--	13.84	24.549	15.60	-3.16	9.00
5200.0	9.62	9.70	8.63	--	14.11	24.148	15.60	-2.89	9.00
5240.0	9.57	9.67	8.60	--	14.08	24.349	15.60	-2.92	9.00

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 51 of 407

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	7.40
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	
5190.0	10.53	11.10	10.57	--	15.51	46.894	15.60	-0.09	11.00
5230.0	10.60	11.17	10.43	--	15.52	47.695	15.60	-0.08	11.00

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	802.11ac-40	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	7.40
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	
5190.0	10.68	10.97	10.41	--	15.46	46.894	15.60	-0.14	11.00
5230.0	10.71	11.17	10.33	--	15.52	48.497	15.60	-0.08	11.00

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 52 of 407

<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	29.3 MBit/s	<b>Antenna Gain (dBi):</b>	7.40
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

Test Measurement Results										
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting	
	Port(s)									
MHz	a	b	c	d	$\Sigma$ Port(s) dBm	MHz	dBm	dBm		
5210.0	10.44	10.89	10.14	--	15.27	100.200	15.60	-0.73	11.00	

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	$\pm 2.81$ dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 53 of 407

### Frequency Band 5250 – 5350 MHz

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6 MBit/s	<b>Antenna Gain (dBi):</b>	7.40
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

Test Measurement Results										
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting	
	Port(s)									
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm		
5260.0	17.58	17.57	16.96	--	22.15	24.248	22.60	-0.45	15.50	
5300.0	17.73	17.67	16.91	--	22.22	24.048	22.60	-0.38	15.00	
5320.0	17.83	17.87	16.89	--	22.32	22.946	22.60	-0.28	15.50	

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6.5 MBit/s	<b>Antenna Gain (dBi):</b>	7.40
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

Test Measurement Results										
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting	
	Port(s)									
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm		
5260.0	17.53	17.78	16.85	--	22.18	23.948	22.60	-0.42	15.50	
5300.0	17.94	17.97	16.96	--	22.42	23.948	22.60	-0.18	15.50	
5320.0	17.94	17.82	16.96	--	22.37	24.248	22.60	-0.23	16.00	

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 54 of 407

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	7.40
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	
5270.0	17.18	17.82	16.89	--	22.09	46.693	22.60	-0.51	17.50
5310.0	17.73	18.14	17.18	--	22.47	46.894	22.60	-0.13	17.50

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±2.81 dB

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	802.11ac-40	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	7.40
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	
5270.0	17.53	17.91	17.08	--	22.29	47.695	22.60	-0.31	17.50
5310.0	17.75	18.12	17.53	--	22.58	47.094	22.60	-0.02	17.50

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 55 of 407

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	29.3 MBit/s	<b>Antenna Gain (dBi):</b>	7.40
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	
5290.0	17.49	17.87	17.20	--	22.30	95.391	22.60	-0.30	17.50

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 56 of 407

### Frequency Band 5470 – 5700 MHz

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6 MBit/s	<b>Antenna Gain (dBi):</b>	7.80
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	
5500.0	16.81	15.95	16.11	--	21.08	23.447	22.20	-1.12	16.00
5580.0	17.10	16.89	16.12	--	21.49	23.447	22.20	-0.71	16.00
5720.0	17.65	17.45	16.36	--	21.96	23.747	22.20	-0.24	15.00

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

#### Equipment Configuration for Peak Transmit Power

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6.5 MBit/s	<b>Antenna Gain (dBi):</b>	7.80
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	
5500.0	16.92	15.90	15.82	--	21.01	18.437	22.20	-1.19	16.50
5580.0	17.04	16.92	16.06	--	21.47	24.248	22.20	-0.73	16.00
5720.0	17.44	17.52	16.27	--	21.88	24.048	22.20	-0.32	15.50

#### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 57 of 407

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	7.80
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	
5510.0	17.01	17.68	16.97	--	22.00	46.493	22.20	-0.20	17.50
5550.0	16.65	17.88	16.99	--	21.98	46.693	22.20	-0.22	17.50
5710.0	16.99	17.74	17.29		22.12	47.495	24.00	-0.08	16.50

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±2.81 dB

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	802.11ac-40	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	7.80
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	N/A
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	
5510.0	17.06	17.69	16.85		21.99	45.691	22.20	-0.21	17.50
5550.0	16.75	17.77	16.84		21.92	46.894	22.20	-0.28	17.50
5710.0	16.95	17.75	17.20		22.08	46.894	22.20	-0.12	16.50

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 58 of 407

**Equipment Configuration for Peak Transmit Power**

<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	29.3 MBit/s	<b>Antenna Gain (dBi):</b>	7.80
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	$\Sigma$ Port(s) dBm	MHz	dBm	dBm	
5530.0	16.65	17.34	16.82	--	21.72	93.387	22.20	-0.48	17.50
5690.0	17.17	17.77	17.09	--	22.13	92.986	22.20	-0.07	17.50

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	$\pm 2.81$ dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 59 of 407

## Measurement Results for Maximum Conducted Output Power

### Specification Limits

#### **FCC, Part 15 §15.407 (a)(1), (a)(2) and Industry Canada RSS-210 § A9.2(2)**

**(a)(1)** For the band 5.15-5.25 GHz the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or  $+4 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

**(a)(2)** For the 5.25-5.35 and 5470-5725 MHz GHz band the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $+11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +11 dBm in any 1 megahertz band.

#### **Industry Canada RSS-210 §A9.2(2)**

For the band 5150-5250 MHz, the maximum equivalent isotropically radiated power (e.i.r.p.) shall not exceed 200 mW or  $10 + 10 \log_{10} B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

For the band 5250-5350 MHz and 5470-5725 MHz, the maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10} B$ , dBm, whichever power is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band. The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10} B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz.

### Traceability

#### Test Equipment Used

0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 60 of 407

### 6.1.1.3. Peak Power Spectral Density

Conducted Test Conditions for Power Spectral Density			
<b>Standard:</b>	FCC CFR 47:15.407	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	Power Spectral Density	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.247 (a)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	KDB 789033 - D01 DTS General UNII Test Procedures v01		

**Test Procedure for Power Spectral Density**

The In-Band power spectral density was measured using the measure and sum approach per FCC KDB 662911 (D01 Multiple Transmitter Output v01.)

Summation Plots:

It may be observed that the spectrum in some plots may break the limit line however this in itself does NOT constitute a failure for devices with multiple antenna ports. In the case of devices with multiple ports i.e. MIMO devices a summation plot is automatically generated for all active antenna ports. Spectral values are arithmetically summed on a computer and results exported back to the spectrum analyzer as a data file producing a graphical image of total summed spectral power density for the device. The spectrum plot is saved and provided for review.

NOTE: The margin for failing spectral plots will be marked BOLD red. A summation plot is not required for devices with a single antenna port. A failure occurs after the summation of spectrum plots have been summed and the peak marker is found to be greater than the limit line.

Supporting Information

Calculated Power =  $A + 10 \log (1/x)$  dBm

A = Total Power Spectral Density [ $10 \log_{10} (10a/10 + 10 b/10 + 10c/10 + 10d/10)$ ]

x = Duty Cycle

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 61 of 407

**Equipment Configuration for Peak Power Spectral Density**

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6 MBit/s	<b>Antenna Gain (dBi):</b>	7.40
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Power Spectral Density				Calculated Power Spectral Density $\Sigma$ Port(s)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5180.0	-1.745	-1.442	-3.100	--	2.733	2.6	0.1
5200.0	-1.855	-1.551	-3.043	--	2.668	2.6	0.1
5240.0	-2.030	-1.850	-2.980	--	2.512	2.6	-0.1

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Power Spectral Density Summation Ports A+B+C+D

**Equipment Configuration for Peak Power Spectral Density**

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6 MBit/s	<b>Antenna Gain (dBi):</b>	7.40
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

Test Frequency	Measured Power Spectral Density	Limit	Margin
	Port(s) (dBm/MHz)		
MHz	Summation A+B+C+D	dBm/MHz	dB
5180.0	2.353	2.6	-0.25
5200.0	2.489	2.6	-0.11
5240.0	2.351	2.6	-0.25

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 62 of 407

**Equipment Configuration for Peak Power Spectral Density**

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6.5 MBit/s	<b>Antenna Gain (dBi):</b>	7.40
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Power Spectral Density				Calculated Power Spectral Density $\Sigma$ Port(s)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5180.0	-1.684	-1.686	-2.926	--	2.711	2.6	0.1
5200.0	-1.859	-1.779	-3.067	--	2.575	2.6	0.0
5240.0	-2.115	-2.041	-3.250	--	2.337	2.6	-0.3

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Power Spectral Density Summation Ports A+B+C+D

**Equipment Configuration for Peak Power Spectral Density**

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6.5 MBit/s	<b>Antenna Gain (dBi):</b>	7.40
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

Test Frequency	Measured Power Spectral Density	Limit	Margin
	Port(s) (dBm/MHz)		
MHz	Summation A+B+C+D	dBm/MHz	dB
5180.0	2.352	2.6	-0.25
5200.0	2.203	2.6	-0.40
5240.0	2.092	2.6	-0.51

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 63 of 407

**Equipment Configuration for Peak Power Spectral Density**

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	7.40
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Power Spectral Density				Calculated Power Spectral Density $\Sigma$ Port(s)	Limit	Margin
	Port(s) (dBm/MHz)						
	MHz	a	b	c			
5190.0	-2.499	-1.924	-3.450	--	2.192	2.6	-0.4
5230.0	-2.546	-2.055	-3.851	--	2.018	2.6	-0.6

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	$\pm 2.81$ dB

**Equipment Configuration for Peak Power Spectral Density**

<b>Variant:</b>	802.11ac-40	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	7.40
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Power Spectral Density				Calculated Power Spectral Density $\Sigma$ Port(s)	Limit	Margin
	Port(s) (dBm/MHz)						
	MHz	a	b	c			
5190.0	-2.781	-1.823	-3.563	--	2.107	2.6	-0.5
5230.0	-2.701	-2.153	-3.735	--	1.957	2.6	-0.6

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	$\pm 2.81$ dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 64 of 407

**Equipment Configuration for Peak Power Spectral Density**

<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	29.3 MBit/s	<b>Antenna Gain (dBi):</b>	7.40
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Power Spectral Density				Calculated Power Spectral Density $\Sigma$ Port(s)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5210.0	-5.946	-5.809	-7.219	--	-1.509	2.6	-4.1

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

**Equipment Configuration for Peak Power Spectral Density**

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6 MBit/s	<b>Antenna Gain (dBi):</b>	7.40
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Power Spectral Density				Calculated Power Spectral Density $\Sigma$ Port(s)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5260.0	<a href="#">4.462</a>	<a href="#">5.008</a>	<a href="#">4.716</a>	--	9.506	9.6	-0.1
5300.0	<a href="#">3.875</a>	<a href="#">4.634</a>	<a href="#">4.260</a>	--	9.039	9.6	-0.6
5320.0	<a href="#">4.412</a>	<a href="#">4.778</a>	<a href="#">4.824</a>	--	9.446	9.6	-0.2

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	2.81 dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 65 of 407

**Equipment Configuration for Peak Power Spectral Density**

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6.5 MBit/s	<b>Antenna Gain (dBi):</b>	7.40
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Power Spectral Density				Calculated Power Spectral Density $\Sigma$ Port(s)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5260.0	<a href="#">4.256</a>	<a href="#">4.880</a>	<a href="#">4.559</a>	--	9.344	9.6	-0.3
5300.0	<a href="#">4.083</a>	<a href="#">4.531</a>	<a href="#">4.541</a>	--	9.161	9.6	-0.4
5320.0	<a href="#">4.549</a>	<a href="#">5.329</a>	<a href="#">4.845</a>	--	9.691	9.6	<b>0.1</b>

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	2.81 dB

Power Spectral Density Summation A+B+C+D

**Equipment Configuration for Peak Power Spectral Density**

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6.5 MBit/s	<b>Antenna Gain (dBi):</b>	7.40
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

Test Frequency	Measured Power Spectral Density	Limit	Margin
	Port(s) (dBm/MHz)		
MHz	Summation A+B+C+D	dBm/MHz	dB
5320.0	<a href="#">9.550</a>	9.6	-0.1

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 66 of 407

**Equipment Configuration for Peak Power Spectral Density**

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	7.40
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Power Spectral Density				Calculated Power Spectral Density $\Sigma$ Port(s)	Limit	Margin
	Port(s) (dBm/MHz)						
	MHz	a	b	c			
5270.0	4.137	4.006	2.974	--	8.507	9.6	-1.1
5310.0	3.948	4.460	2.958	--	8.604	9.6	-1.0

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	$\pm 2.81$ dB

**Equipment Configuration for Peak Power Spectral Density**

<b>Variant:</b>	802.11ac-40	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	144 MBit/s	<b>Antenna Gain (dBi):</b>	7.40
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Power Spectral Density				Calculated Power Spectral Density $\Sigma$ Port(s)	Limit	Margin
	Port(s) (dBm/MHz)						
	MHz	a	b	c			
5270.0	3.835	4.098	3.032	--	8.449	9.6	-1.2
5310.0	3.894	4.170	2.753	--	8.419	9.6	-1.2

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	$\pm 2.81$ dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 67 of 407

**Equipment Configuration for Peak Power Spectral Density**

<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	192 MBit/s	<b>Antenna Gain (dBi):</b>	7.40
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Power Spectral Density				Calculated Power Spectral Density $\Sigma$ Port(s)	Limit	Margin
	Port(s) (dBm/MHz)						
	MHz	a	b	c			
5290.0	0.226	0.567	-0.703	--	4.834	9.6	-4.8

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	$\pm 2.81$ dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 68 of 407

**Equipment Configuration for Peak Power Spectral Density**

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6 MBit/s	<b>Antenna Gain (dBi):</b>	7.80
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Power Spectral Density				Calculated Power Spectral Density $\Sigma$ Port(s)	Limit	Margin
	Port(s) (dBm/MHz)						
	MHz	a	b	c			
5500.0	<a href="#">4.577</a>	<a href="#">4.828</a>	<a href="#">3.437</a>		9.093	9.2	-0.1
5580.0	<a href="#">4.574</a>	<a href="#">4.962</a>	<a href="#">3.977</a>		9.294	9.2	<b>0.1</b>
5720.0	<a href="#">3.926</a>	<a href="#">4.789</a>	<a href="#">3.954</a>		9.013	9.2	-0.2

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	$\pm 2.81$ dB

Power Spectral Density Summation A+B+C+D

**Equipment Configuration for Peak Power Spectral Density**

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6 MBit/s	<b>Antenna Gain (dBi):</b>	7.80
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

Test Frequency	Measured Power Spectral Density		Limit	Margin
	Port(s) (dBm/MHz)			
MHz	Summation A+B+C+D		dBm/MHz	dB
5580	<a href="#">9.080</a>		9.2	-1.2

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	$\pm 2.81$ dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 69 of 407

**Equipment Configuration for Peak Power Spectral Density**

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6.5 MBit/s	<b>Antenna Gain (dBi):</b>	7.80
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Power Spectral Density				Calculated Power Spectral Density $\Sigma$ Port(s)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5500.0	<a href="#">4.636</a>	<a href="#">4.927</a>	<a href="#">3.749</a>		9.237	9.2	<b>0.0</b>
5580.0	<a href="#">4.126</a>	<a href="#">4.644</a>	<a href="#">3.328</a>		8.837	9.2	-0.4
5720.0	<a href="#">3.825</a>	<a href="#">4.606</a>	<a href="#">3.826</a>		8.874	9.2	-0.3

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	$\pm 2.81$ dB

**Power Spectral Density Summation A+B+C+D**

**Equipment Configuration for Peak Power Spectral Density**

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6.5 MBit/s	<b>Antenna Gain (dBi):</b>	7.80
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

Test Frequency	Measured Power Spectral Density	Limit	Margin
	Port(s) (dBm/MHz)		
MHz	Summation A+B+C+D	dBm/MHz	dB
5500.0	<a href="#">9.150</a>	9.2	0.5

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	$\pm 2.81$ dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 70 of 407

**Equipment Configuration for Peak Power Spectral Density**

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	7.80
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Power Spectral Density				Calculated Power Spectral Density $\Sigma$ Port(s)	Limit	Margin
	Port(s) (dBm/MHz)						
	MHz	a	b	c			
5510.0	3.377	3.625	2.112	--	7.858	9.2	-1.3
5550.0	3.557	3.883	1.796	--	7.942	9.2	-1.3
5710.0	3.262	3.659	3.051	--	8.103	9.2	-1.1

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	$\pm 2.81$ dB

**Equipment Configuration for Peak Power Spectral Density**

<b>Variant:</b>	802.11ac-40	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	7.80
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Power Spectral Density				Calculated Power Spectral Density $\Sigma$ Port(s)	Limit	Margin
	Port(s) (dBm/MHz)						
	MHz	a	b	c			
5510.0	3.544	3.580	2.182	--	7.920	9.2	-1.3
5550.0	3.664	3.750	1.836	--	7.940	9.2	-1.3
5710.0	2.986	3.683	3.113	--	8.043	9.2	-1.2

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	$\pm 2.81$ dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 71 of 407

**Equipment Configuration for Peak Power Spectral Density**

<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	29.3 MBit/s	<b>Antenna Gain (dBi):</b>	7.80
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Power Spectral Density				Calculated Power Spectral Density $\Sigma$ Port(s)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5530.0	0.823	0.389	-0.752	--	4.974	9.2	-4.2

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	$\pm 2.81$ dB

**Equipment Configuration for Peak Power Spectral Density**

<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	29.3 MBit/s	<b>Antenna Gain (dBi):</b>	7.80
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Power Spectral Density				Calculated Power Spectral Density $\Sigma$ Port(s)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5690.0	-1.440	-1.688	-1.408	--	3.261	9.2	-5.9

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	$\pm 2.81$ dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 72 of 407

---

### Specification

**FCC, Part 15 §15.407 (a)(1), (a)(2)**

**5150 – 5250 MHz**

**(a)(1)** The peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

**5250 – 5350 MHz & 5470 – 5725 MHz**

**(a)(2)** The peak power spectral density shall not exceed +11 dBm in any 1 megahertz band.

**Industry Canada RSS-210 § A9.2(1), A9.2(2)**

**5150 – 5250 MHz**

§ **A9.2(1)** The eirp spectral density shall not exceed +10 dBm in any 1 MHz band

**5250 – 5350 MHz & 5470 – 5725 MHz**

§ **A9.2(2)** The power spectral density shall not exceed +11 dBm in any 1 MHz band

### Traceability

Test Equipment Used
---------------------

0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117
--

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 73 of 407

#### 6.1.1.4. Peak Excursion Ratio

Conducted Test Conditions for Peak Excursion Ratio			
<b>Standard:</b>	FCC CFR 47:15.407	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	Peak Excursion Ratio	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.407 (a)(6)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	KDB 789033 - D01 DTS General UNII Test Procedures v01		

##### Test Procedure for Peak Excursion Ratio

Compliance with the peak excursion requirement is demonstrated by confirming the ratio of the maximum of the peak-hold spectrum to the maximum of the average spectrum during continuous transmission. Section F) of KDB 789033 was used in order to prove compliance. This is a conducted measurement using a spectrum analyzer using dual traces. Peak Excursion Ratio is the difference in amplitude (dB) between both traces; The following identifies two spectrum traces on the same plot. Trace 1 is the max hold Peak detector, and Trace 2 is the recalled trace data from Peak Power Spectral Density measurements. Each frequency and operational mode is recalled in order to prove compliance.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 74 of 407

**Equipment Configuration for Peak Excursion Ratio**

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency MHz	Measured Peak Excursion (dB)				Ratio (dB)		Limit dB	Lowest Margin MHz
	Port(s)				Highest	Lowest		
	a	b	c	d				
5180.0	9.58	--	--	--	9.58	9.58	13.0	-3.42

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

**Equipment Configuration for Peak Excursion Ratio**

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency MHz	Measured Peak Excursion (dB)				Ratio (dB)		Limit dB	Lowest Margin MHz
	Port(s)				Highest	Lowest		
	a	b	c	d				
5180.0	9.09	--	--	--	9.09	9.09	13.0	-3.91

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 75 of 407

**Equipment Configuration for Peak Excursion Ratio**

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Peak Excursion (dB)				Ratio (dB)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d			dB	MHz
5190.0	9.79	--	--	--	9.79	9.79	13.0	-3.21

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

**Equipment Configuration for Peak Excursion Ratio**

<b>Variant:</b>	802.11ac-40	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Peak Excursion (dB)				Ratio (dB)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d			dB	MHz
5190.0	9.62	--	--	--	9.62	9.62	13.0	-3.38

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 76 of 407

**Equipment Configuration for Peak Excursion Ratio**

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency MHz	Measured Peak Excursion (dB)				Ratio (dB)		Limit dB	Lowest Margin MHz
	Port(s)				Highest	Lowest		
	a	b	c	d				
5510.0	9.85	--	--	--	9.85	9.85	13.0	-3.15

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 77 of 407

**Equipment Configuration for Peak Excursion Ratio**

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Peak Excursion (dB)				Ratio (dB)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5260.0	9.06	--	--	--	9.06	9.06	13.0	-3.94

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

**Equipment Configuration for Peak Excursion Ratio**

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6.5 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Peak Excursion (dB)				Ratio (dB)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5260.0	8.99	--	--	--	8.99	8.99	13.0	-4.01

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 78 of 407

**Equipment Configuration for Peak Excursion Ratio**

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Peak Excursion (dB)				Ratio (dB)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d			dB	MHz
5270.0	9.82	--	--	--	9.82	9.82	13.0	-3.18

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

**Equipment Configuration for Peak Excursion Ratio**

<b>Variant:</b>	802.11ac-40	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	144 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Peak Excursion (dB)				Ratio (dB)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d			dB	MHz
5270.0	9.97	--	--	--	9.97	9.97	13.0	-3.03

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 79 of 407

**Equipment Configuration for Peak Excursion Ratio**

<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	192 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Peak Excursion (dB)				Ratio (dB)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d			dB	MHz
5290.0	10.30	--	--	--	10.30	10.30	13.0	-2.70

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 80 of 407

**Equipment Configuration for Peak Excursion Ratio**

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Peak Excursion (dB)				Ratio (dB)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5500.0	9.26	--	--	--	9.26	9.26	13.0	-3.74

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

**Equipment Configuration for Peak Excursion Ratio**

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6.5 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Peak Excursion (dB)				Ratio (dB)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5500.0	9.03	--	--	--	9.03	9.03	13.0	-3.97

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 81 of 407

**Equipment Configuration for Peak Excursion Ratio**

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Peak Excursion (dB)				Ratio (dB)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d			dB	MHz
5510.0	9.22	--	--	--	9.22	9.22	13.0	-3.78

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

**Equipment Configuration for Peak Excursion Ratio**

<b>Variant:</b>	802.11ac-40	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Peak Excursion (dB)				Ratio (dB)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d			dB	MHz
5510.0	9.71	--	--	--	9.71	9.71	13.0	-3.29

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 82 of 407

<b>Equipment Configuration for Peak Excursion Ratio</b>
---

<b>Variant:</b>	802.11ac-80	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	29.3 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable		
<b>Engineering Test Notes:</b>			

<b>Test Measurement Results</b>
---------------------------------

Test Frequency MHz	Measured Peak Excursion (dB)				Ratio (dB)		Limit dB	Lowest Margin MHz
	Port(s)				Highest	Lowest		
	a	b	c	d				
5530.0	9.93	--	--	--	9.93	9.93	13.0	-3.07

<b>Traceability to Industry Recognized Test Methodologies</b>
---

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 83 of 407

---

## Specification

### Limits

**§15.407 (a)(6)** The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified in this paragraph) shall not exceed 13dB across any 1MHz bandwidth or the emission bandwidth whichever is less

### Traceability

Test Equipment Used
---------------------

0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117
--

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 84 of 407

---

#### 6.1.1.5. Frequency Stability

**FCC, Part 15 Subpart C §15.407(g)**  
**Industry Canada RSS-210 §2.1**

##### Test Procedure

The manufacturer of the equipment is responsible for ensuring that the frequency stability is such that emissions are always maintained within the band of operation under all conditions.

##### Manufacturer Declaration

The frequency stability of the reference oscillator sets the frequency stability of the RF transceiver signals. Therefore all of the RF signals should have  $\pm 20$ ppm stability.

This stability accounts for room temp tolerance of the crystal oscillator circuit, frequency variation across temperature, and crystal ageing.

$\pm 20$ ppm at 5.250 GHz translates to a maximum frequency shift of  $\pm 105$  KHz. As the edge of the channels is at least one MHz from either of the band edges,  $\pm 105$  KHz is more than sufficient to guarantee that the intentional emission will remain in the band over the entire operating range of the EUT.

##### Specification

##### Limits

**§15.407 (g)** Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 85 of 407

### 6.1.2. Radiated Emission Testing

**FCC, Part 15 Subpart C §15.407(b)(2), §15.205(a)/15.209(a)**  
**Industry Canada RSS-210 §A9.3(2); §2.2; §2.6; RSS-Gen §4.7**

#### **Test Procedure**

Testing was performed in a 3-meter anechoic chamber. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. Preliminary emissions were recorded with in Spectrum Analyzer mode, using a maximum peak detector while in peak hold mode. Depending on the frequency band spanned a notch filter and/or waveguide filter was used to remove the fundamental frequency.

Emissions nearest the limits were chosen for maximization and formal measurement using a CISPR compliant receiver. Emissions above 1000 MHz are measured utilizing a CISPR compliant average detector with a tuned receiver, using a bandwidth of 1 MHz. Emissions from 30 MHz – 1000 MHz are measured utilizing a CISPR compliant quasi-peak detector with a tuned receiver, using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed.

#### **Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

FS = Field Strength  
R = Measured Spectrum analyzer Input Amplitude  
AF = Antenna Factor

$$CORR = \text{Correction Factor} = CL - AG + NFL$$

CL = Cable Loss  
AG = Amplifier Gain  
FO = Distance Falloff Factor  
NFL = Notch Filter Loss or Waveguide Loss

Field Strength Calculation Example:

Given receiver input reading of 51.5 dB $\mu$ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB $\mu$ V/m (or dB $\mu$ V) and  $\mu$ V/m (or  $\mu$ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu\text{V/m}))}$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$
$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 86 of 407

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength (dB $\mu$ V/m);

$$E = 1000000 \times \sqrt{30P} / 3 \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz = 68.23 dB $\mu$ V/m

**Note:** The data in this Section identifies that the EUT is in compliance with the -27dBm/MHz EIRP limit (68.23 dB $\mu$ V/m) for out of band emissions. All out of band emissions are less than 68.23 dB  $\mu$ V/m.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 87 of 407

## Specification

### Radiated Spurious Emissions

**15.407 (b)(2).** All emissions outside of the 5,150-5,350MHz band shall not exceed an EIRP of -27dBm/MHz.

**FCC §15.205 (a)** Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

**FCC §15.205 (a)** Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

**FCC §15.209 (a)** Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

**RSS-210 §A9.3(2)** For transmitters operating in the 5250-5350 MHz band, all emissions outside the 5150-5350 MHz band shall not exceed -27 dBm/MHz e.i.r.p. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band shall not exceed out of band emission limit of 27 dBm/MHz e.i.r.p. in the 5150-5250 MHz band in order to operate indoor/outdoor, or alternatively shall comply with the spectral power density for operation within the 5150-5250 MHz band and shall be labeled "for indoor use only".

**RSS-Gen §4.7** The search for unwanted emissions shall be from the lowest frequency internally generated or used in the device (local oscillator, intermediate of carrier frequency), or from 30 MHz, whichever is the lowest frequency, to the 5<sup>th</sup> harmonic of the highest frequency generated without exceeding 40 GHz.

#### **RSS-Gen §6** Receiver Spurious Emission Standard

If a radiated measurement is made, all spurious emissions shall comply with the limits of the following Table. The resolution bandwidth of the spectrum analyzer shall be 100 kHz for spurious emission measurements below 1.0 GHz and 1.0 MHz for measurements above 1.0 GHz

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 88 of 407

---

**Table 1: FCC 15.209 Spurious Emissions Limits**

Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ )	Field Strength ( $\text{dB}\mu\text{V/m}$ )	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

**Traceability:**

Test Equipment Used
0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312


---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 6.1.2.1. Integral Antenna – Spurious Emissions

<b>Test Freq.</b>	5180 MHz	<b>Engineer</b>	SB
<b>Variant</b>	802.11a; 6 Mbs	<b>Temp (°C)</b>	24
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	30
<b>Power Setting</b>	18	<b>Press. (mBars)</b>	1010
<b>Antenna</b>	integral	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>			
<b>Test Notes 2</b>			

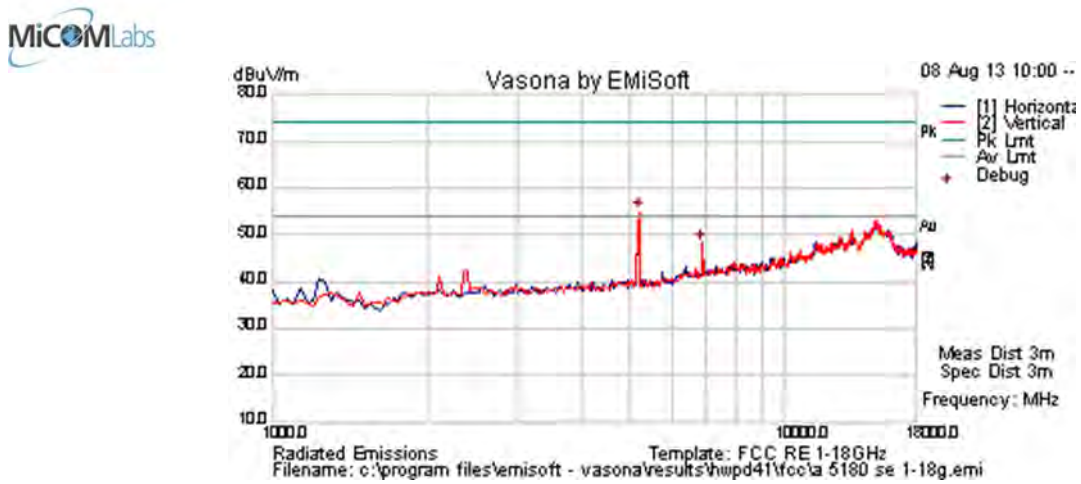

#### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5190.381	60.1	4.8	-9.9	55.0	Peak [Scan]	V	100	0				FUND
6893.787	49.3	5.6	-6.5	48.4	Peak [Scan]	V	100	0	54.0	-5.6	Pass	NRB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205												


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 90 of 407

<b>Test Freq.</b>	5200 MHz	<b>Engineer</b>	SB
<b>Variant</b>	802.11a; 6 Mbs	<b>Temp (°C)</b>	24
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	30
<b>Power Setting</b>	9	<b>Press. (mBars)</b>	1010
<b>Antenna</b>	integral	<b>Duty Cycle (%)</b>	100

<b>Test Notes 1</b>	
<b>Test Notes 2</b>	

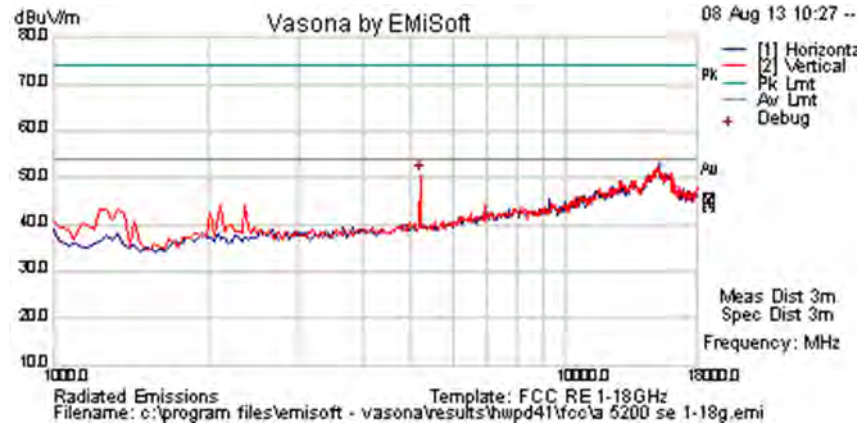

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5190.381	55.8	4.8	-9.9	50.7	Peak [Scan]	V	100	0				FUND


Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
	NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 91 of 407

Test Freq.	5240 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	24
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	30
Power Setting	9	Press. (mBars)	1010
Antenna	integral	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

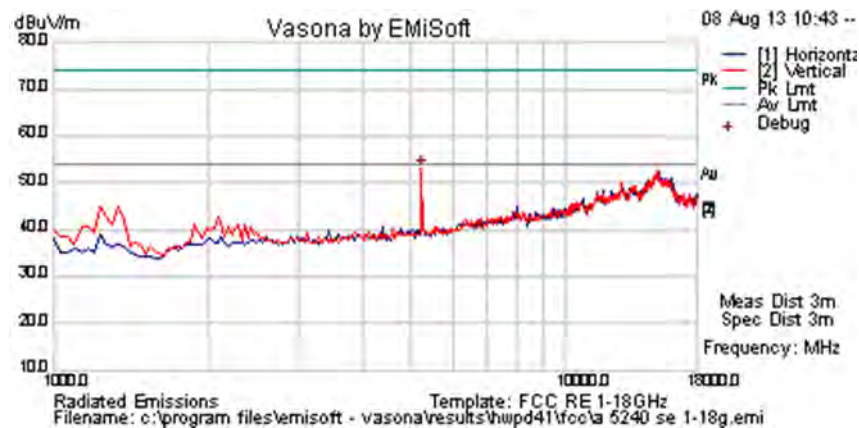

### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5224.449	58.0	4.8	-9.8	53.0	Peak [Scan]	V	100	0				FUND
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205												


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 92 of 407

Test Freq.	5260 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	24
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	30
Power Setting	16.5	Press. (mBars)	1010
Antenna	integral	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

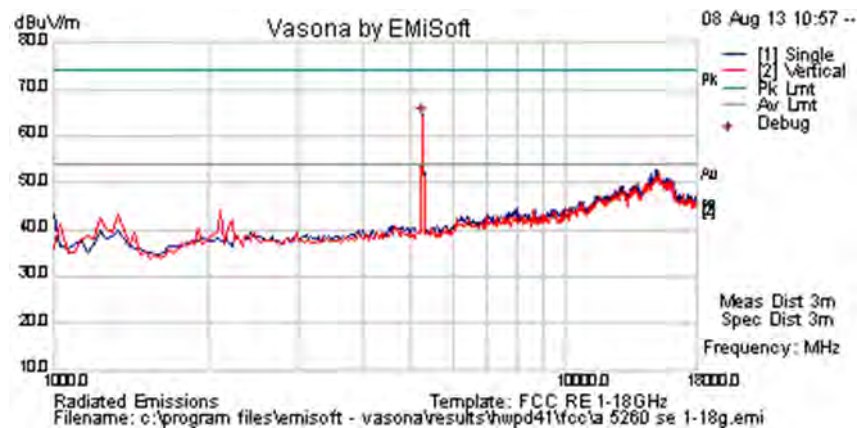

### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5258.517	69.0	4.8	-9.7	64.1	Peak [Scan]	V	0	0				FUND
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205												


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 93 of 407

Test Freq.	5300 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	24
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	30
Power Setting	16.5	Press. (mBars)	1010
Antenna	integral	Duty Cycle (%)	100

Test Notes 1	
Test Notes 2	

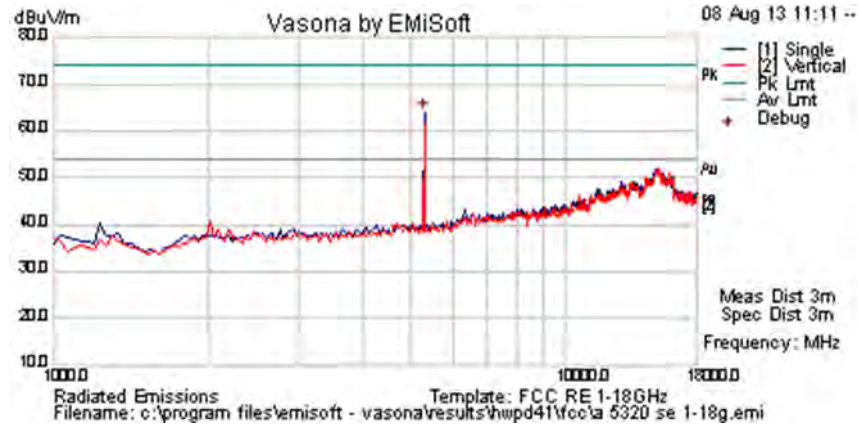

### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5292.585	68.7	4.8	-9.6	63.9	Peak [Scan]		0	0				FUND

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission  
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 94 of 407

<b>Test Freq.</b>	5320 MHz	<b>Engineer</b>	SB
<b>Variant</b>	802.11a; 6 Mbs	<b>Temp (°C)</b>	24
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	30
<b>Power Setting</b>	16.5	<b>Press. (mBars)</b>	1010
<b>Antenna</b>	integral	<b>Duty Cycle (%)</b>	100

<b>Test Notes 1</b>	
<b>Test Notes 2</b>	

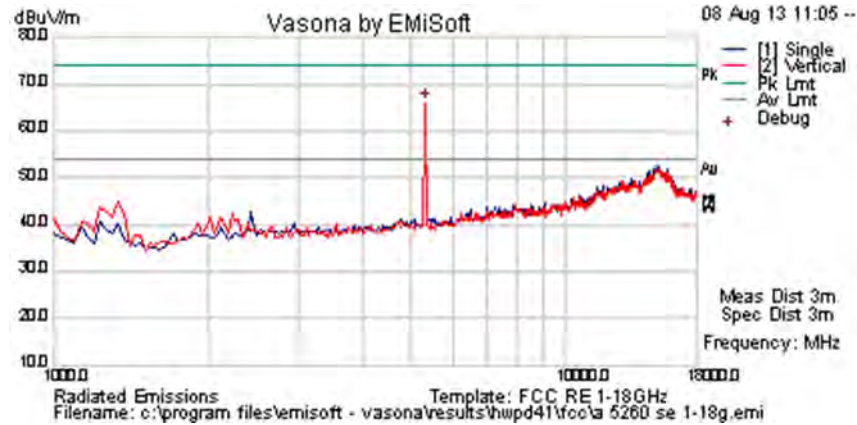

### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5326.653	70.8	4.9	-9.5	66.1	Peak [Scan]	V	0	0				FUND

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission  
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 95 of 407

Test Freq.	5500 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	24
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	30
Power Setting	16.5	Press. (mBars)	1010
Antenna	integral	Duty Cycle (%)	100

Test Notes 1	
Test Notes 2	

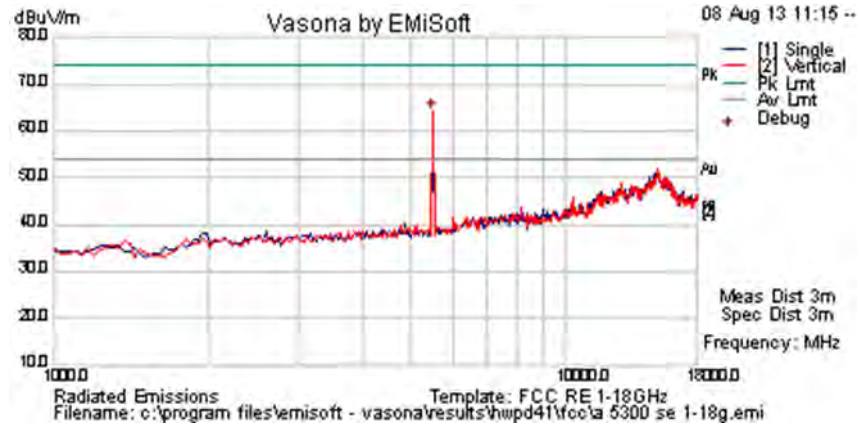

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5496.994	68.8	5.0	-9.6	64.2	Peak [Scan]	V	0	0				FUND

Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
	NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 96 of 407

<b>Test Freq.</b>	5580 MHz	<b>Engineer</b>	SB
<b>Variant</b>	802.11a; 6 Mbs	<b>Temp (°C)</b>	24
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	30
<b>Power Setting</b>	16.5	<b>Press. (mBars)</b>	1010
<b>Antenna</b>	integral	<b>Duty Cycle (%)</b>	100

<b>Test Notes 1</b>	
<b>Test Notes 2</b>	

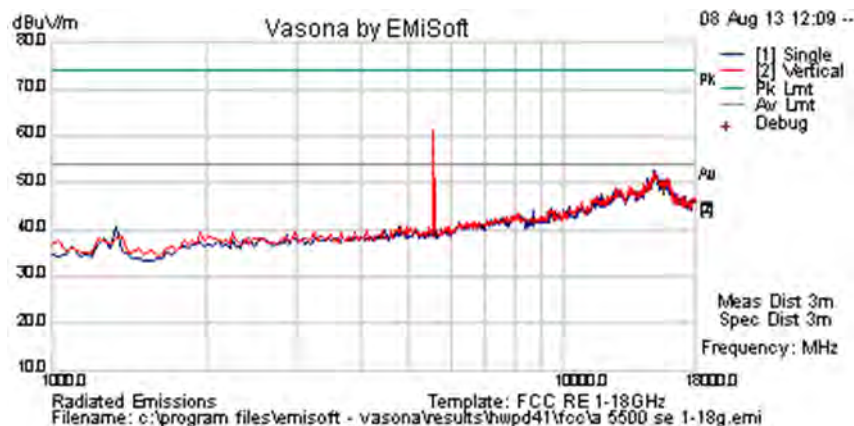

### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5565.130	66.1	4.9	-9.7	61.3	Peak [Scan]	V	0	0				FUND

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission  
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 97 of 407

<b>Test Freq.</b>	5720 MHz	<b>Engineer</b>	SB
<b>Variant</b>	802.11a; 6 Mbs	<b>Temp (°C)</b>	24
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	30
<b>Power Setting</b>	16.5	<b>Press. (mBars)</b>	1010
<b>Antenna</b>	integral	<b>Duty Cycle (%)</b>	100

<b>Test Notes 1</b>	
<b>Test Notes 2</b>	

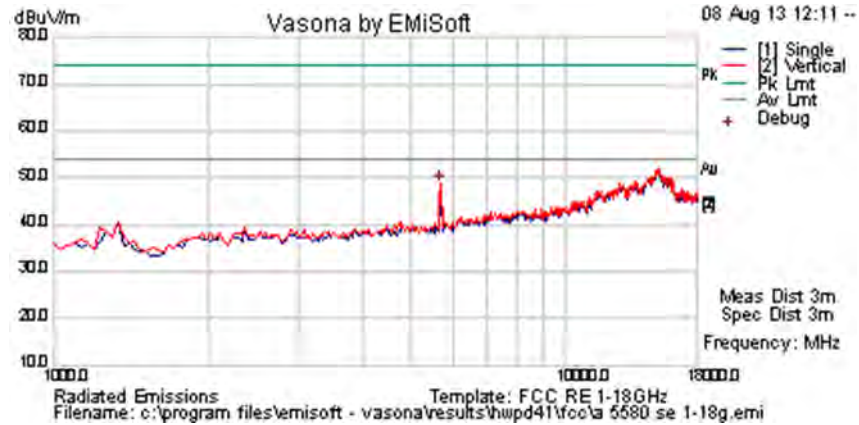

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5701.403	53.4	5.0	-9.6	48.8	Peak [Scan]	V	0	0				FUND

Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
	NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 6.1.2.2. Radiated Band-Edge - Integral Antenna

Peak Limit 74.0 dB $\mu$ V, Peak Limit 54.0 dB $\mu$ V

Operational Mode	5150 MHz			5350 MHz		
	dB $\mu$ V		Power Setting	dB $\mu$ V		Power Setting
	Peak	Average		Peak	Average	
<b>a</b>	52.73	33.58	9.0	64.88	37.80	16.5
<b>n HT-20</b>	54.00	33.26	9.0	64.64	36.50	16.5
<b>n HT-40</b>	50.83	37.50	9.0	63.90	49.11	18.0
<b>VHT-40</b>	51.79	35.26	12.0	63.65	49.22	18.0
<b>VHT-80</b>	61.92	46.64	12.0	62.68	48.60	18.0

Operational Mode	5460 MHz		
	Peak	Average	Power Setting
<b>a</b>	59.94	35.92	16.5
<b>n HT-20</b>	58.86	36.16	16.5
<b>n HT-40</b>	52.85	40.00	18.0
<b>VHT-40</b>	52.19	38.48	18.0
<b>VHT-80</b>	63.90	47.04	18.0


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 99 of 407

### 802.11a Frequency 5180 MHz Band-Edge Frequency 5150

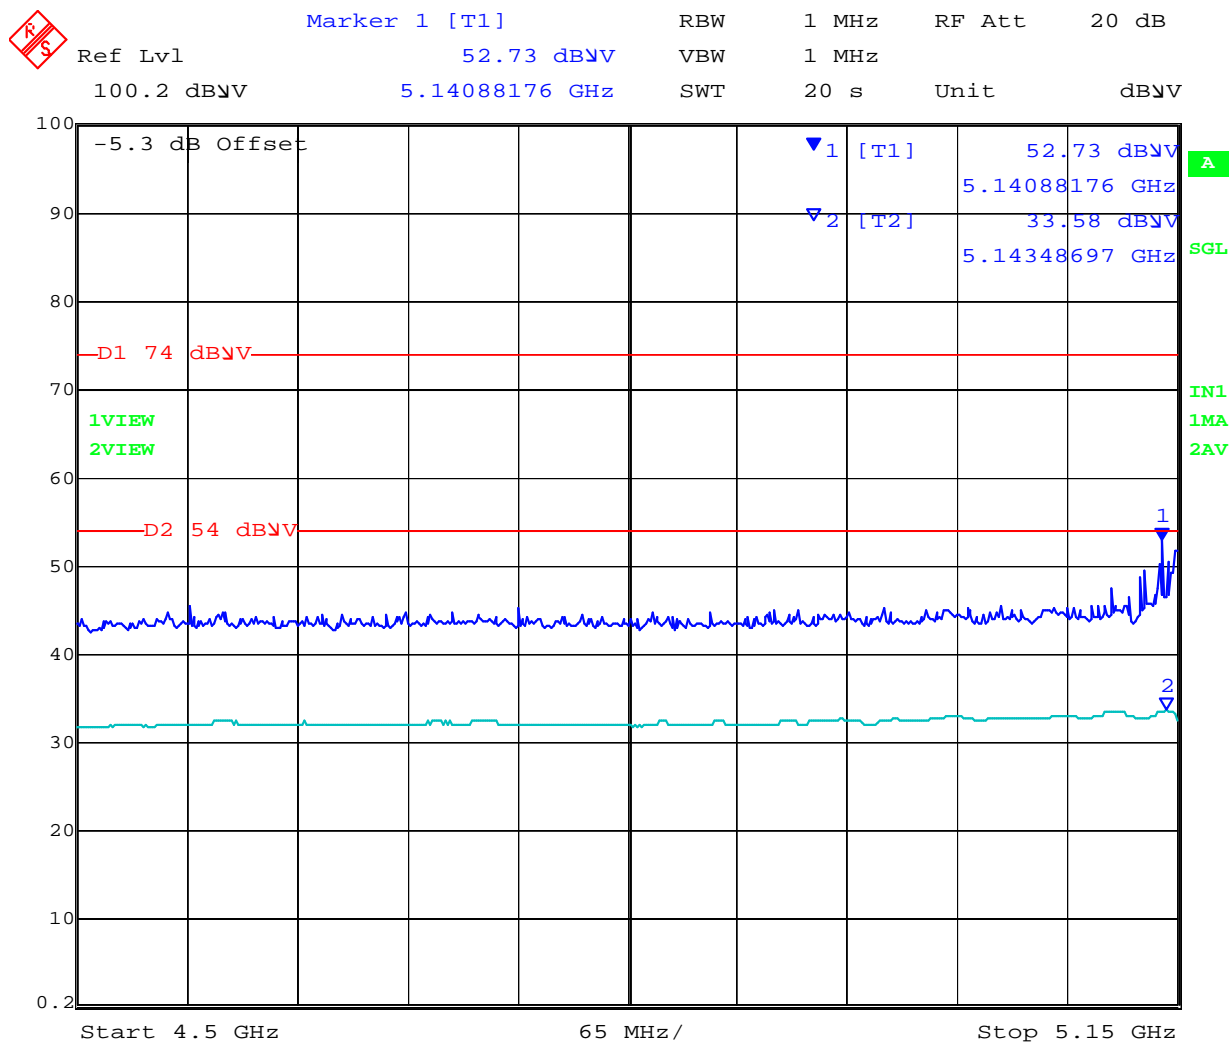


Date: 7.AUG.2013 09:08:53

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





### 802.11a Frequency 5320 MHz Band-Edge Frequency 5350

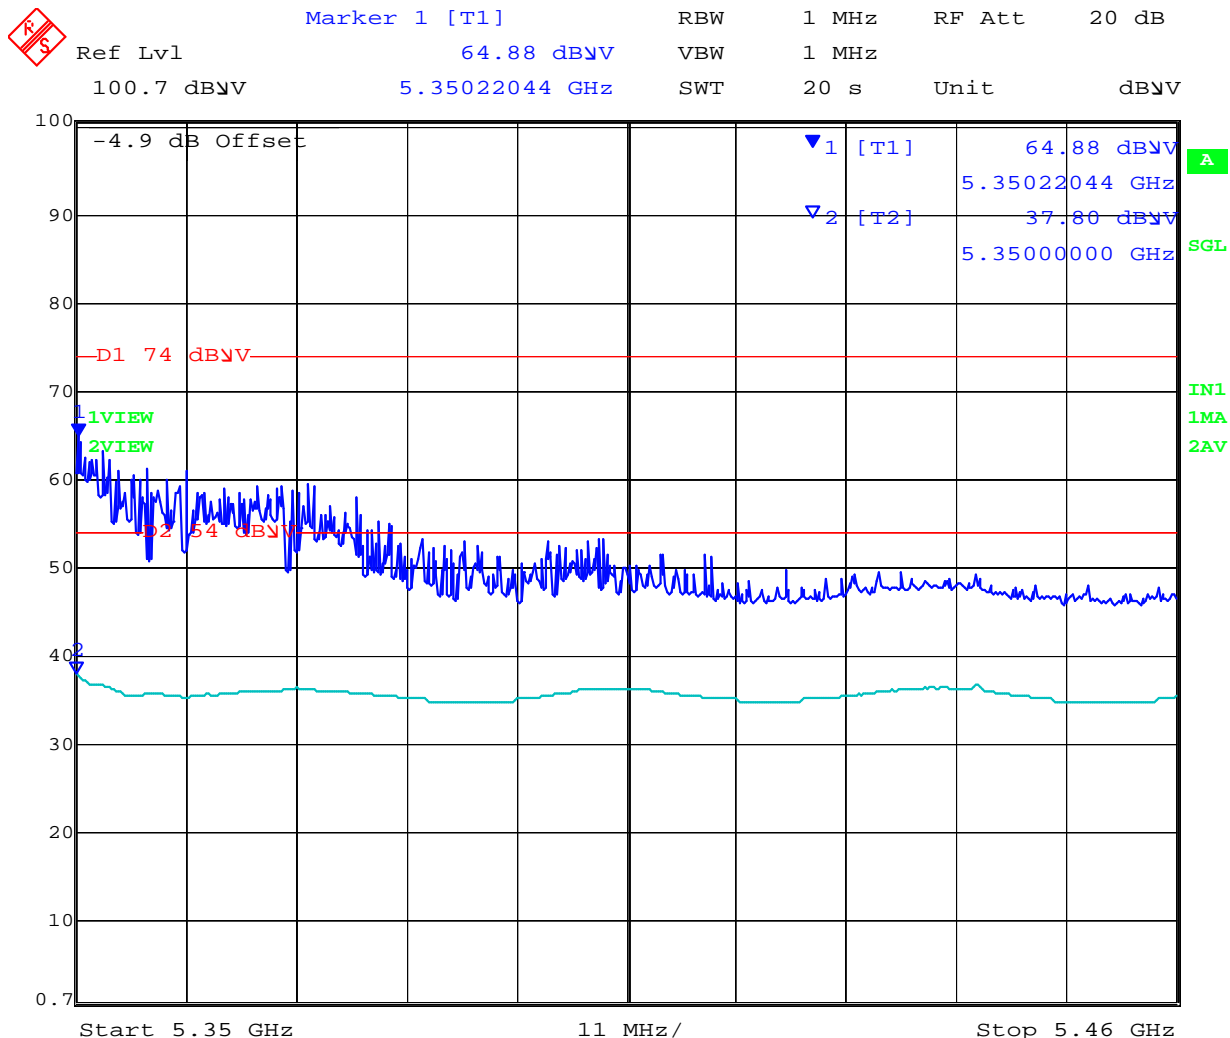


Date: 7.AUG.2013 10:02:01

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 802.11a Frequency 5500 MHz Band-Edge Frequency 5460

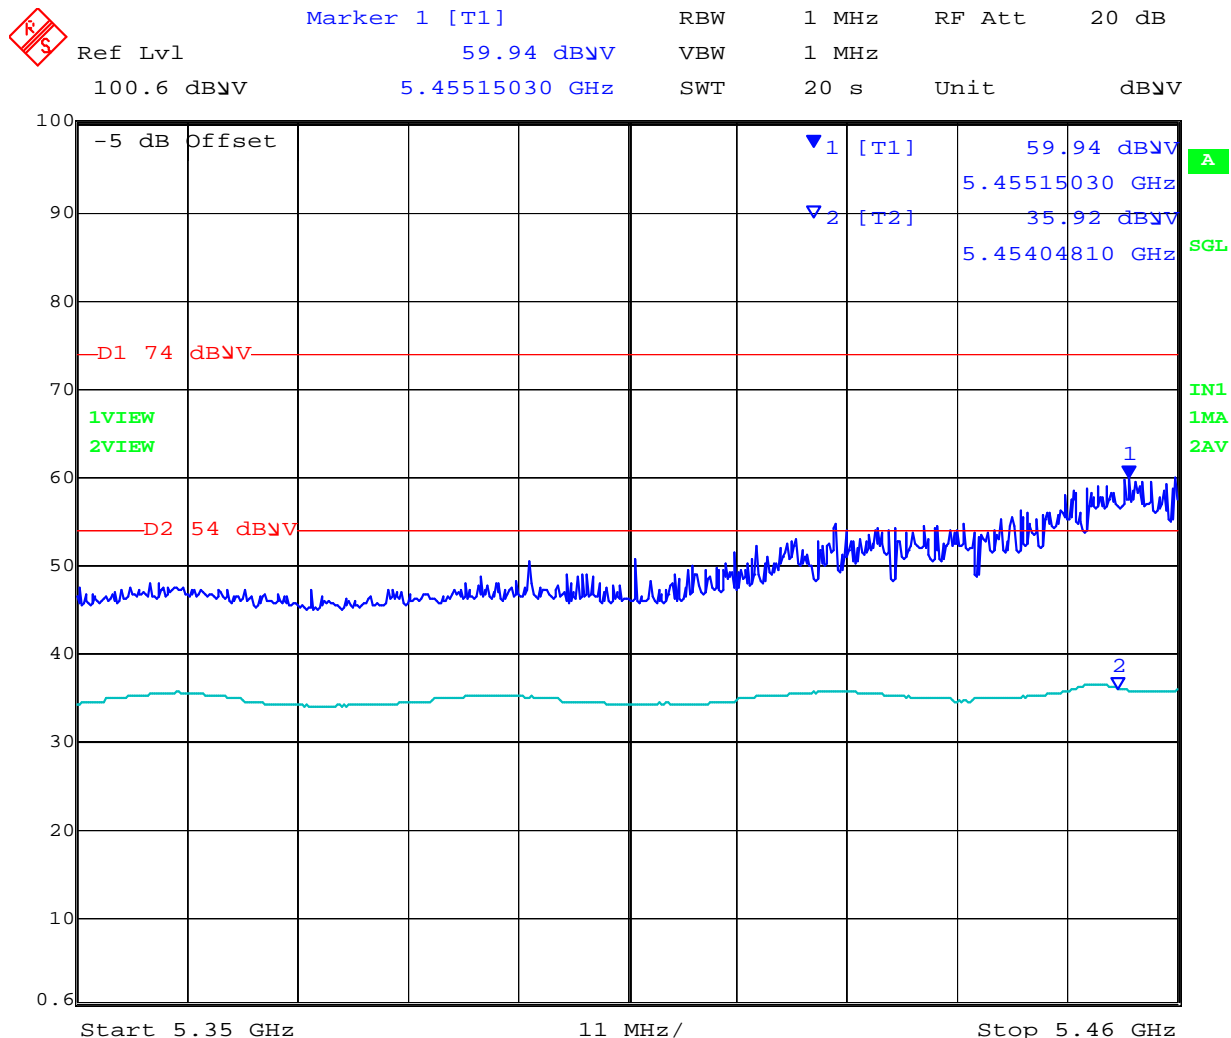


Date: 7.AUG.2013 13:53:49

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





### 802.11n HT-20 Frequency 5320 MHz Band-Edge Frequency 5350

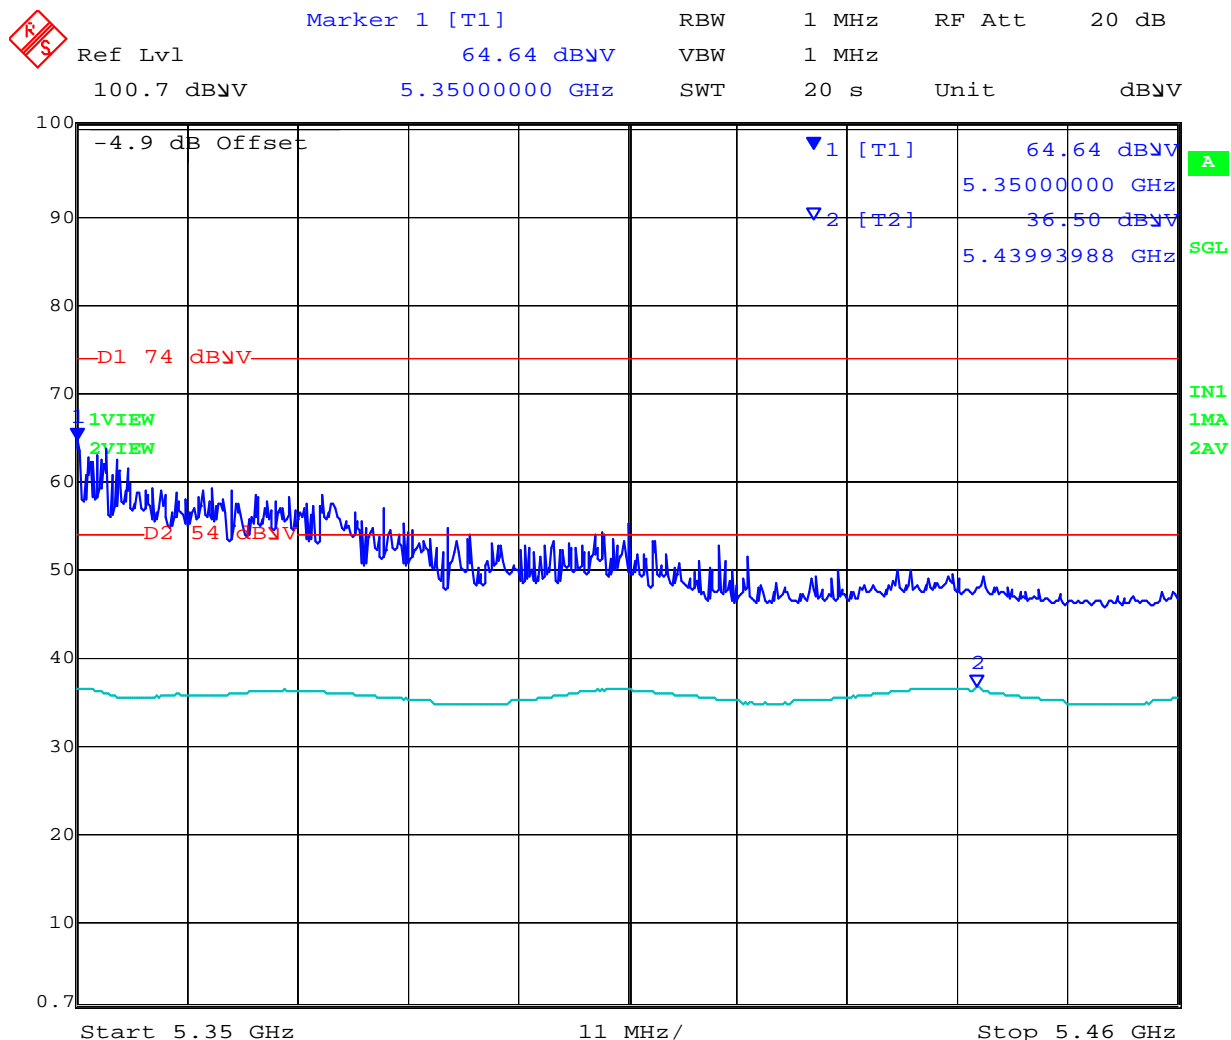


Date: 7.AUG.2013 10:10:36

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 802.11n HT-20 Frequency 5500 MHz Band-Edge Frequency 5460

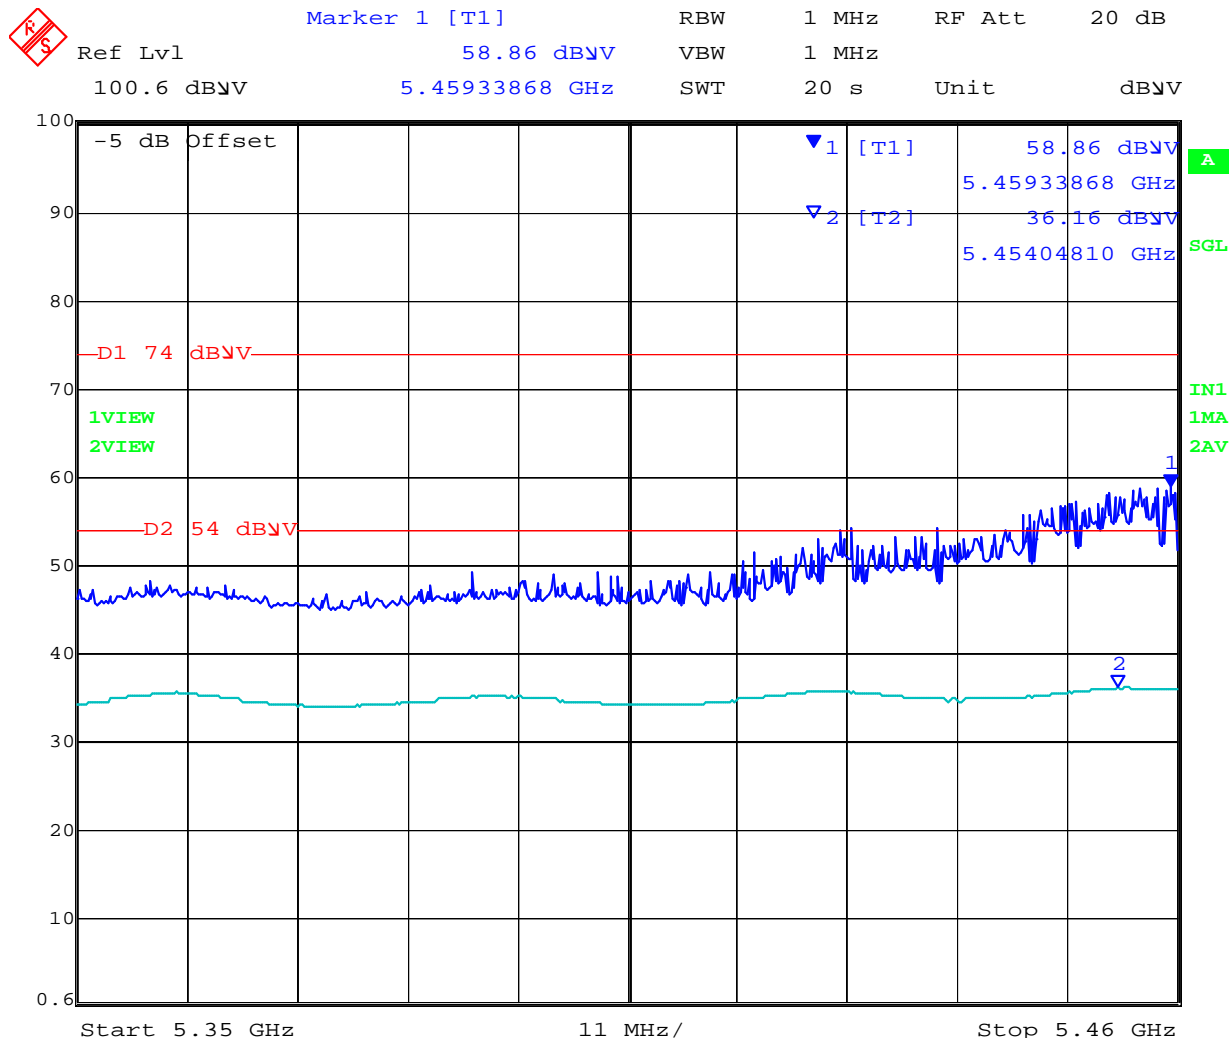


Date: 7.AUG.2013 13:48:43

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 802.11n HT-40 Frequency 5190 MHz Band-Edge Frequency 5150

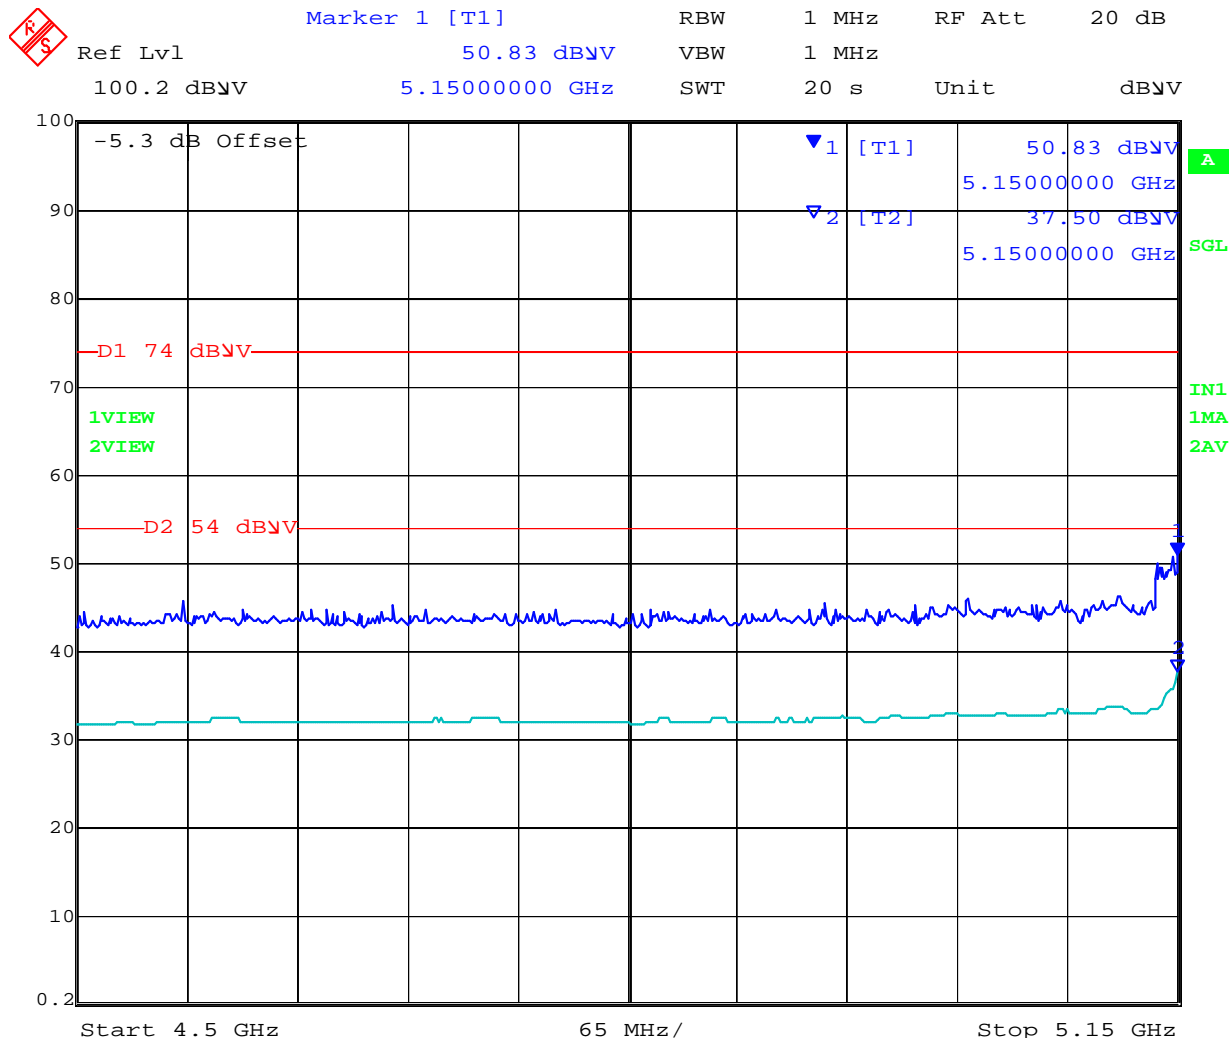


Date: 7.AUG.2013 09:25:54

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 802.11n HT-40 Frequency 5310 MHz Band-Edge Frequency 5350

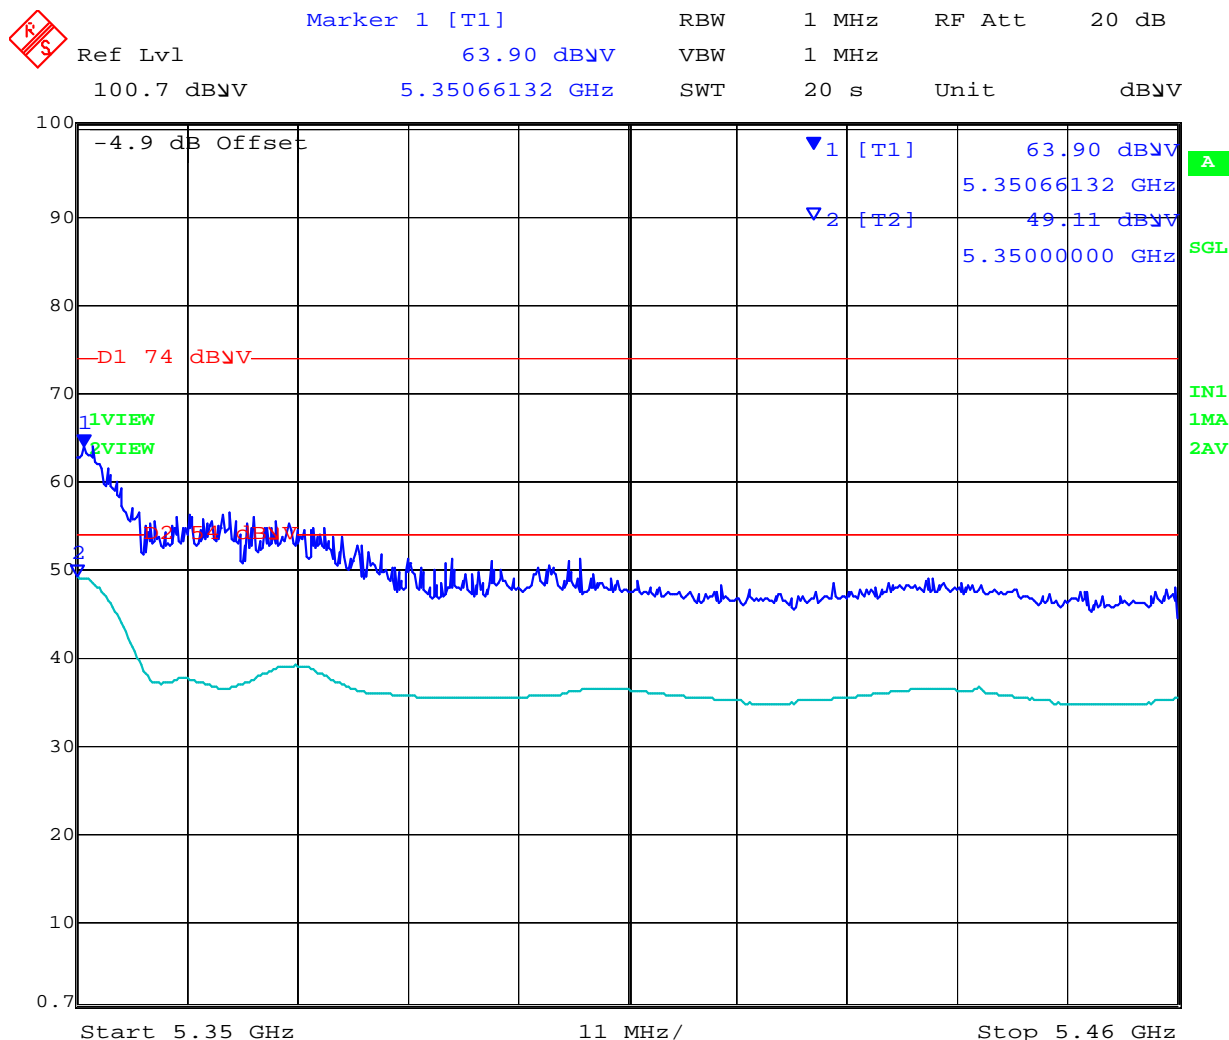


Date: 7.AUG.2013 10:14:03

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 802.11n HT-40 Frequency 5510 MHz Band-Edge Frequency 5460

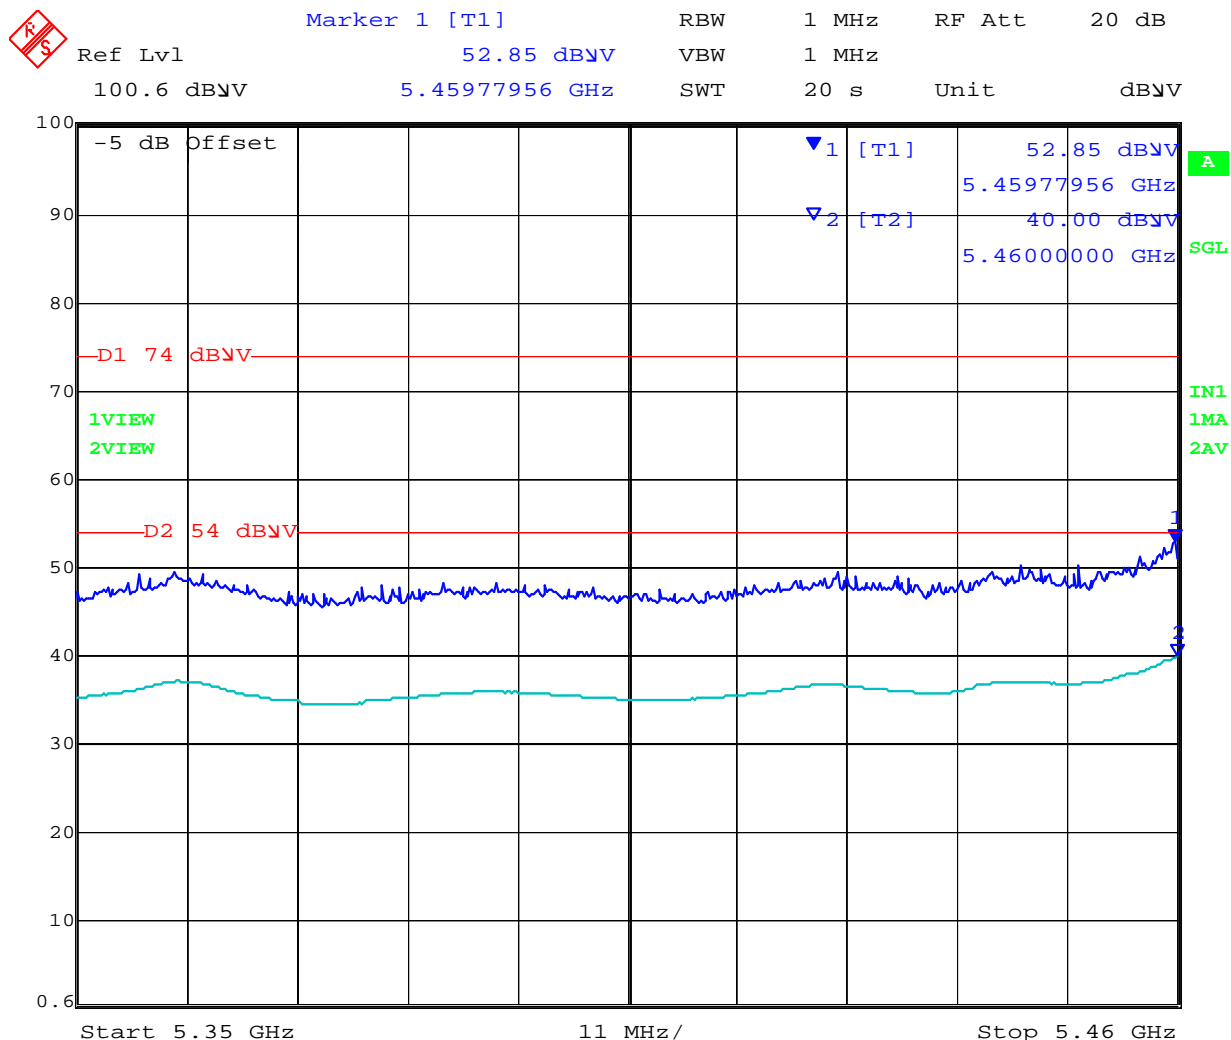

Date: 7.AUG.2013 13:40:25


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 108 of 407

### 802.11VHT-40 Frequency 5190 MHz Band-Edge Frequency 5150

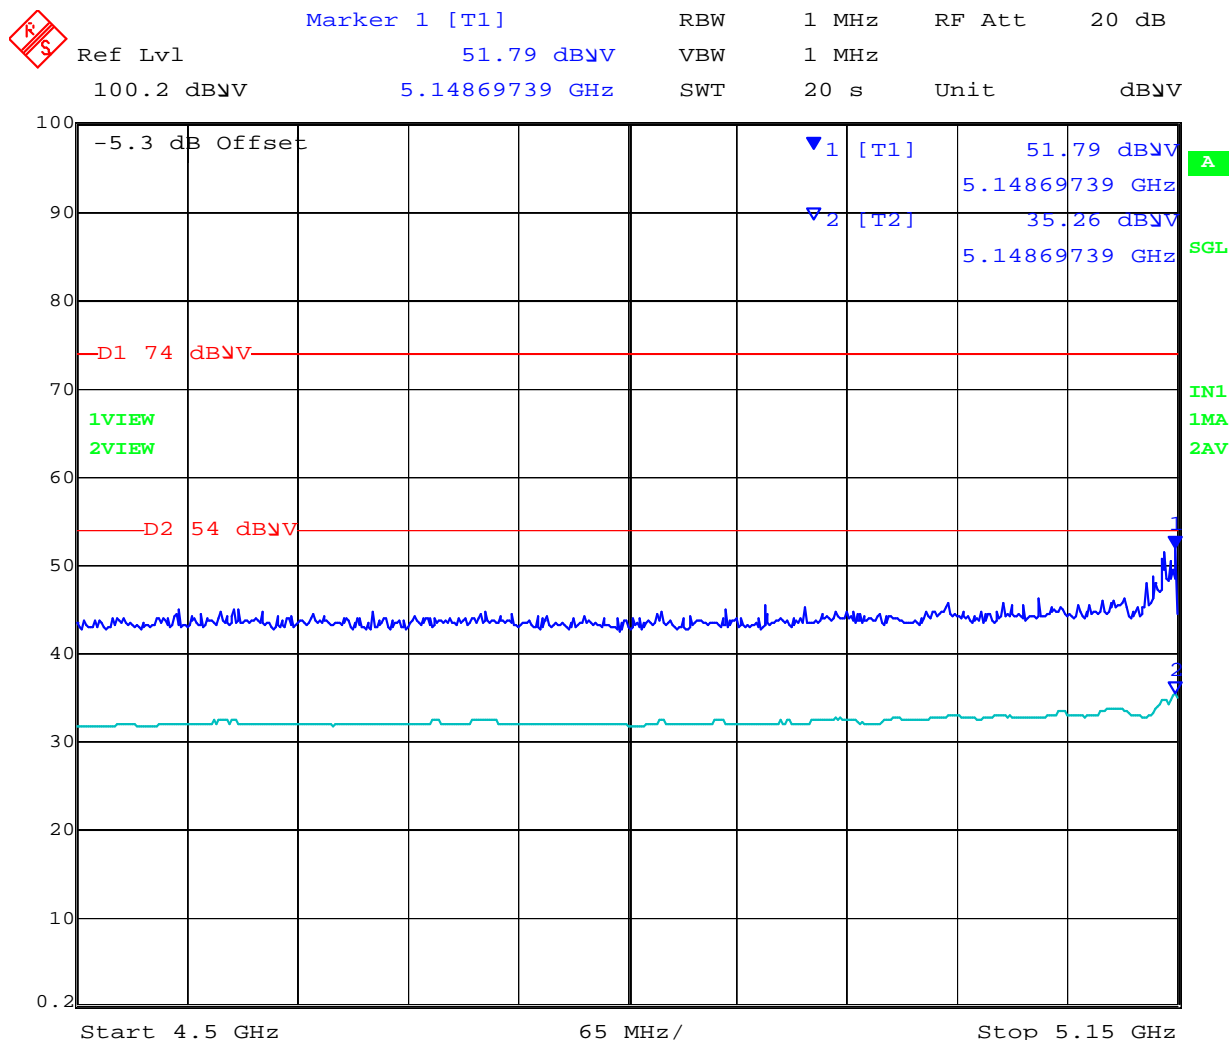


Date: 7.AUG.2013 09:43:08

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**802.11VHT-40 Frequency 5310 MHz Band-Edge Frequency 5350**

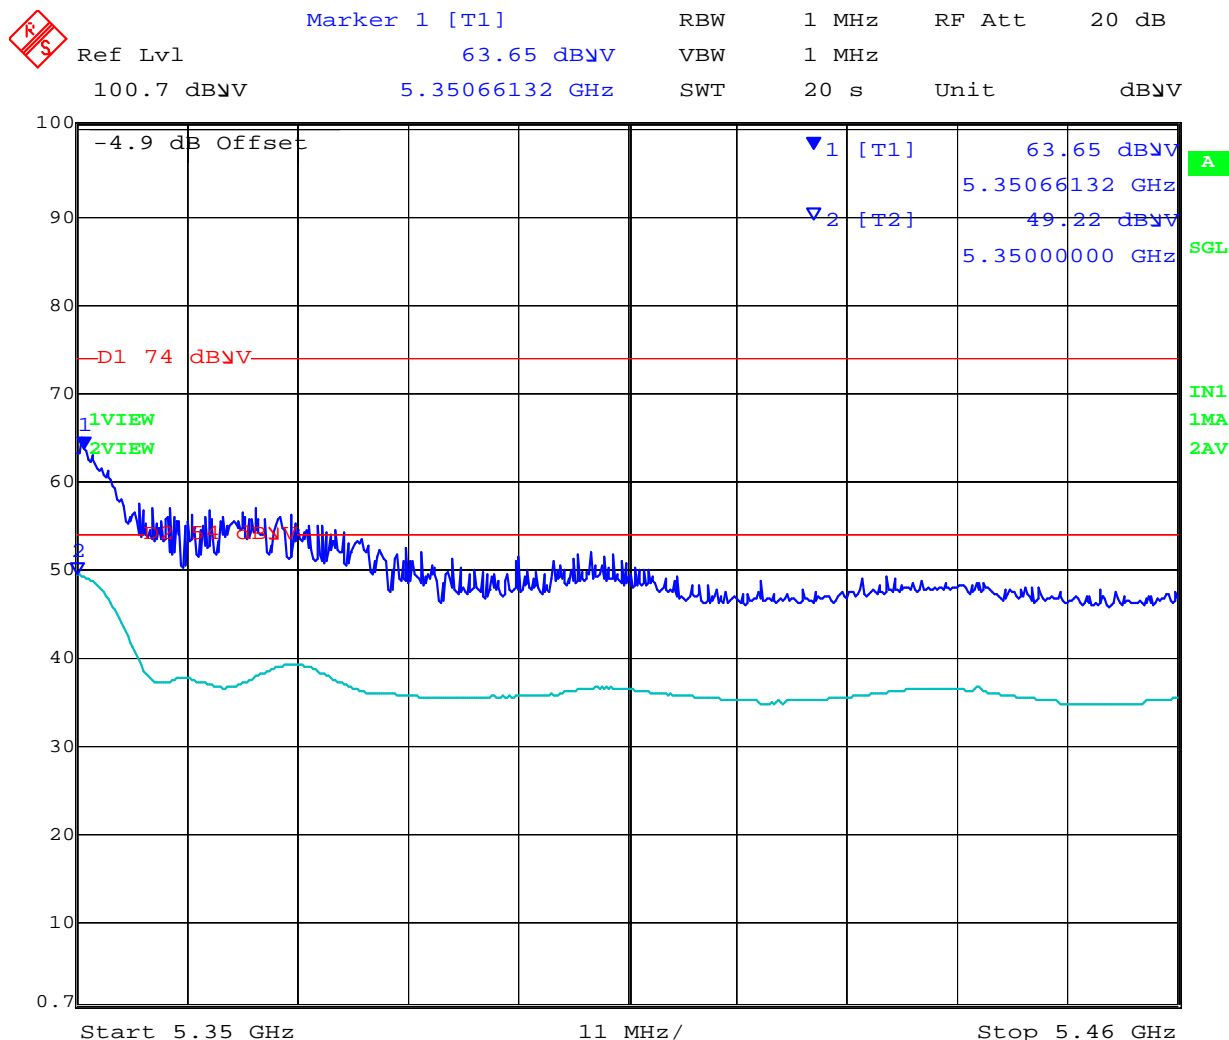


Date: 7.AUG.2013 10:26:29

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**802.11VHT-40 Frequency 5510 MHz Band-Edge Frequency 5460**

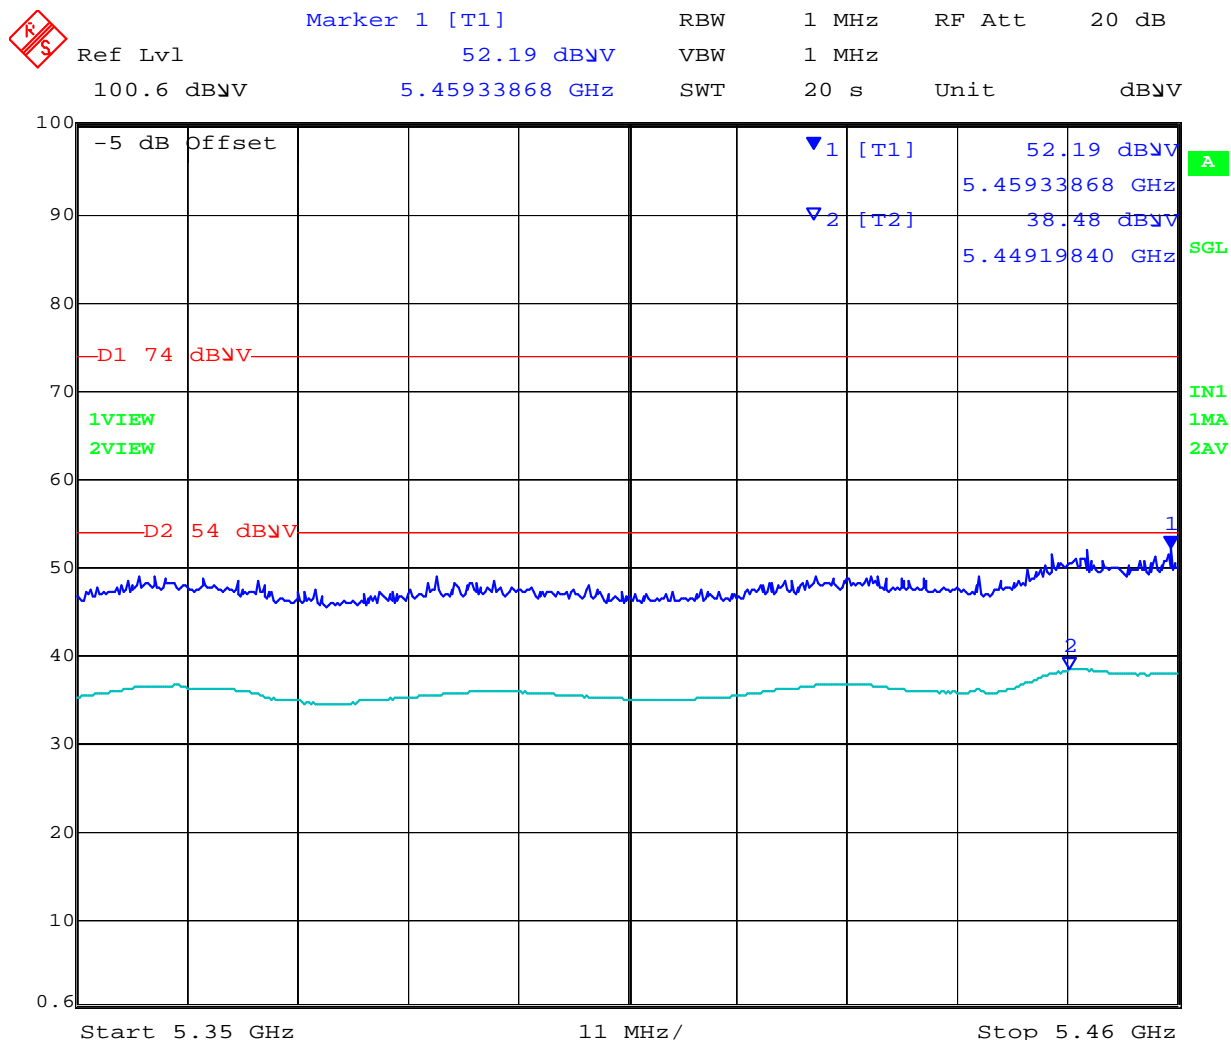


Date: 7.AUG.2013 13:36:10

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**802.11VHT-80 Frequency 5210 MHz Band-Edge Frequency 5150**

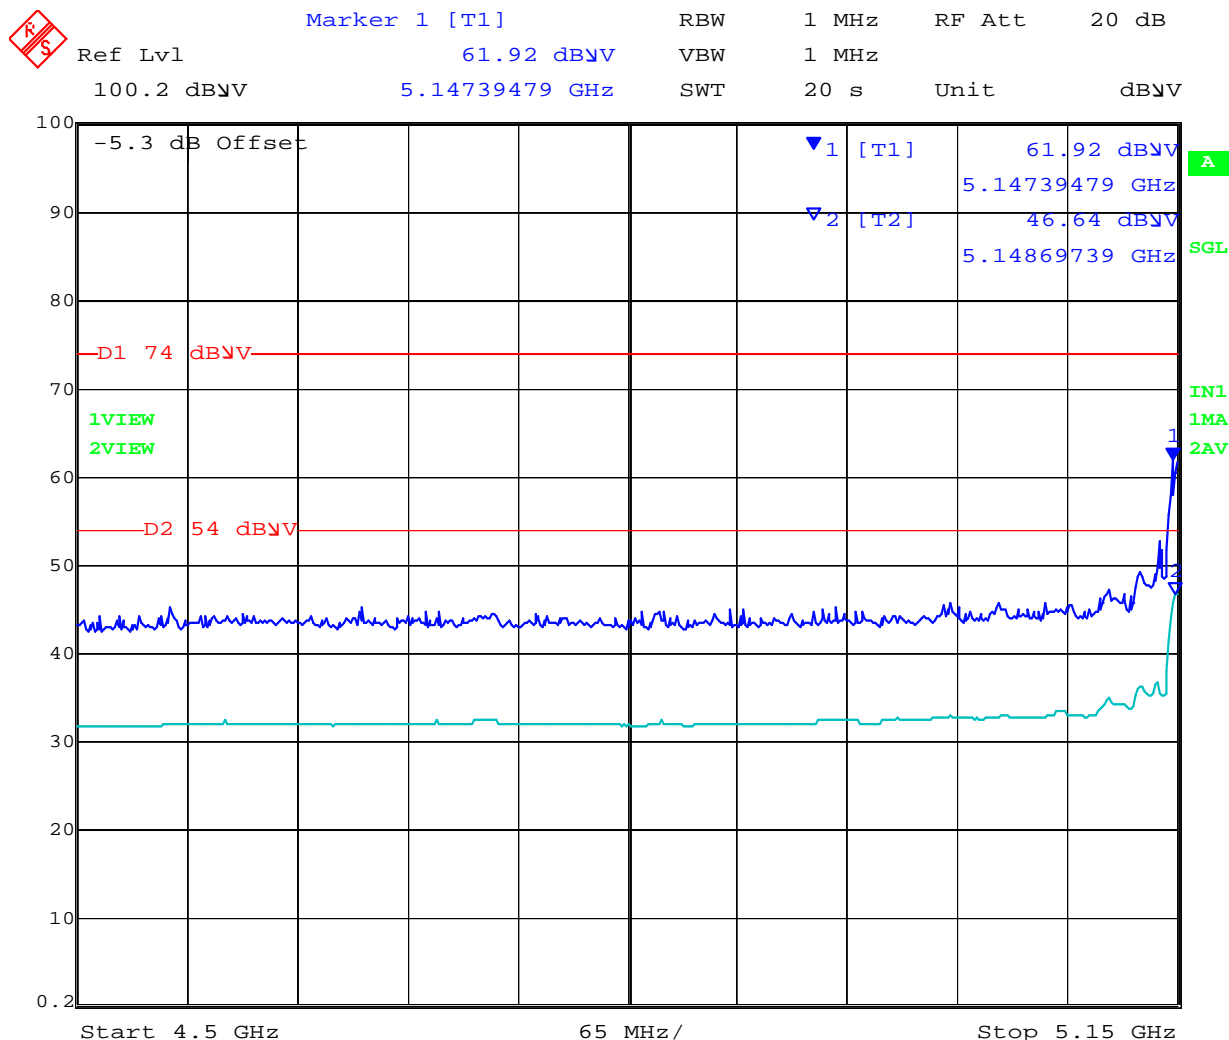


Date: 7.AUG.2013 09:48:59

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**802.11VHT-80 Frequency 5290 MHz Band-Edge Frequency 5350**

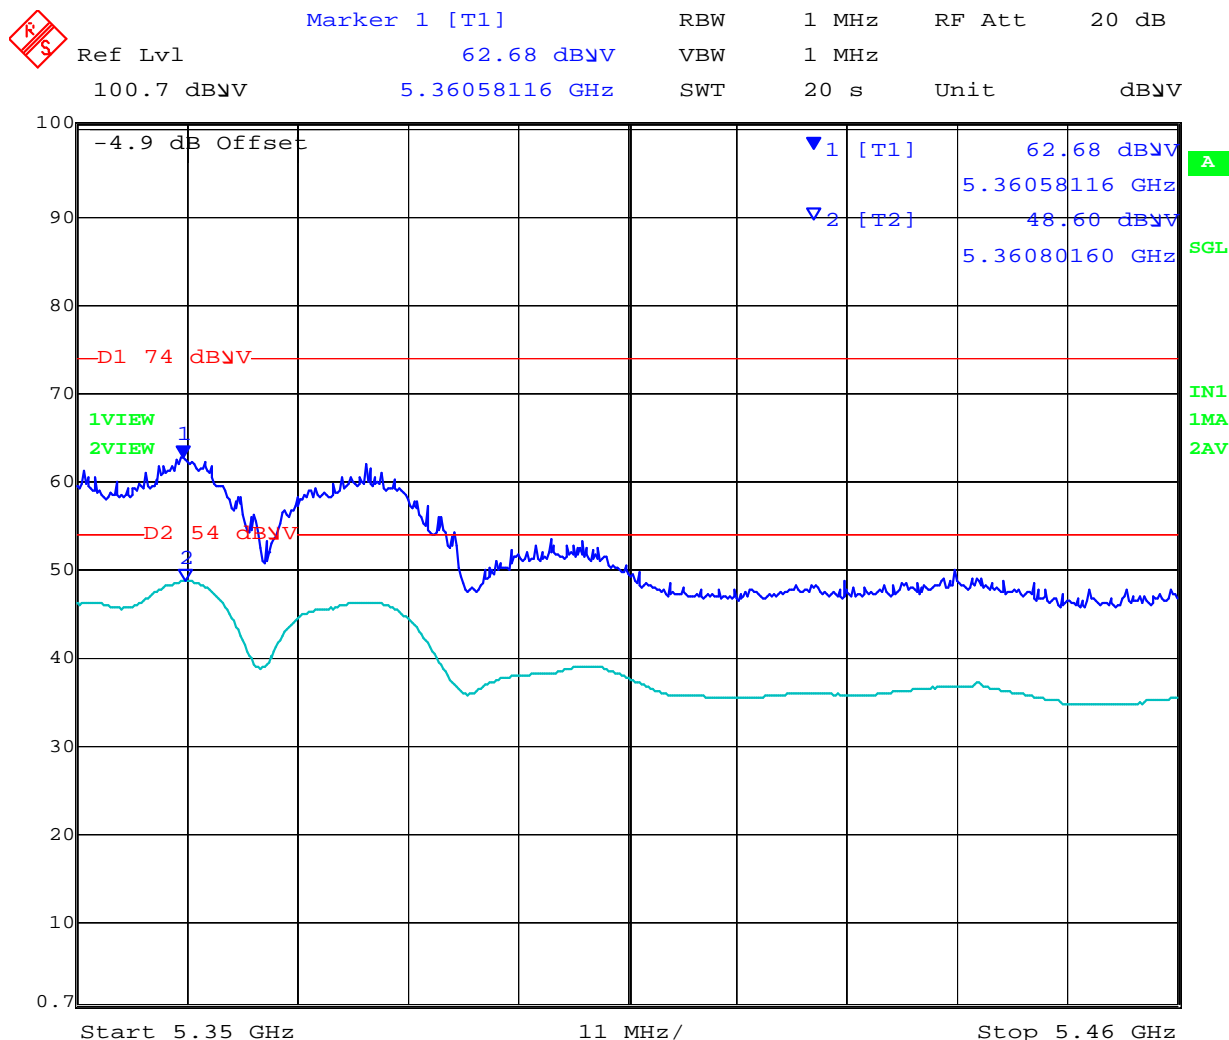


Date: 7.AUG.2013 10:34:44

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**802.11VHT-80 Frequency 5530 MHz Band-Edge Frequency 5460 MHz**

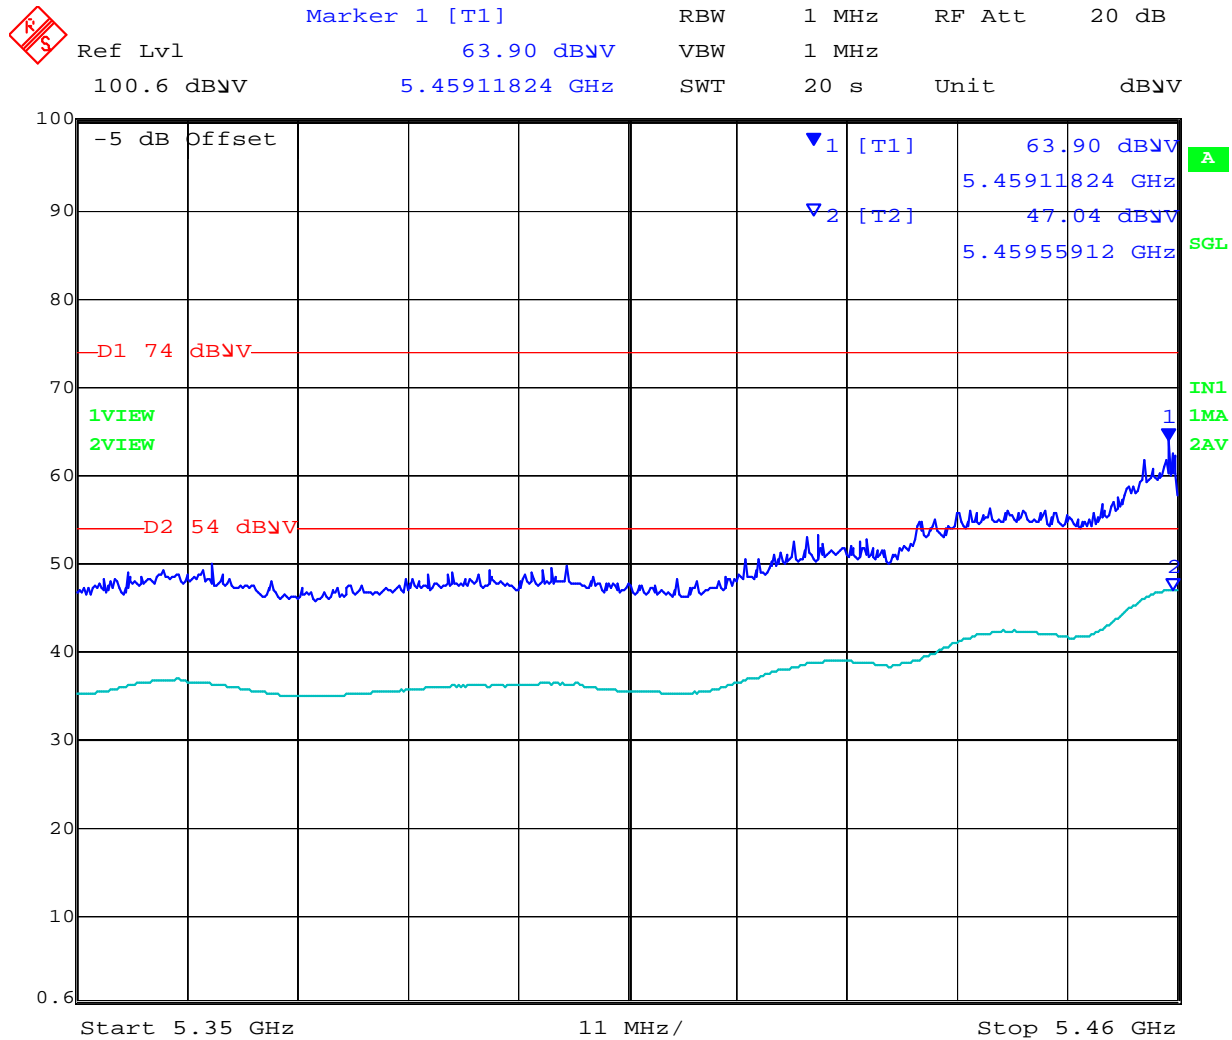

Date: 7.AUG.2013 13:31:58

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 114 of 407

### 6.1.2.3. Digital Emissions (30M-1 GHz)

**FCC, Part 15 Subpart C §15.205/ §15.209**  
**Industry Canada RSS-210 §2.2**

#### Test Procedure

Testing 30M-1 GHz was performed in a 3-meter anechoic chamber using a CISPR compliant receiver. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. To further maximize emissions the receive antenna was varied between 1 and 4 meters. The emissions are recorded with receiver in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed. The anechoic chamber test set-up is identified in Section 6 Test Set-Up Photographs.

The EUT had two methods of powering on ac/dc converter and Power over Ethernet (POE). Both modes were tested for emissions below 1GHz.

#### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength

R = Measured Receiver Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

For example:

Given a Receiver input reading of 51.5dB $\mu$ V; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dB}\mu\text{V/m}$$

Conversion between dB $\mu$ V/m (or dB $\mu$ V) and  $\mu$ V/m (or  $\mu$ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu\text{V/m}))}$$

$$40 \text{ dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250\mu\text{V/m}$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## Specification

### Limits

**§15.205 (a)** Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

**§15.205 (a)** Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

**§15.209 (a)** Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

### §15.209 (a) and RSS-Gen §2.2 Limit Matrix

Frequency(MHz)	Field Strength ( $\mu\text{V/m}$ )	Field Strength ( $\text{dB}\mu\text{V/m}$ )	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

### Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

### Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 6.1.3. AC Wireline Conducted Emissions (150 kHz – 30 MHz)

**FCC, Part 15 Subpart C §15.207**  
**Industry Canada RSS-Gen §7.2.2**

#### Test Procedure


The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

#### Measurement Results for AC Wireline Conducted Emissions (150 kHz – 30 MHz)

Ambient conditions.

Temperature: 17 to 23 °C    Relative humidity: 31 to 57 %    Pressure: 999 to 1012 mbar

#### Test Measurement Set up

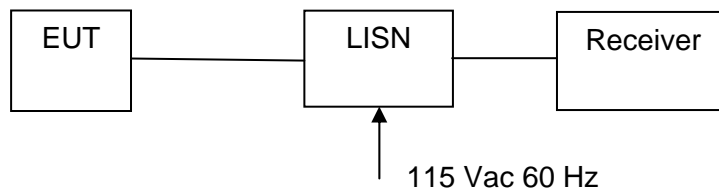

Measurement set up for AC Wireline Conducted Emissions Test

#### Measurement Results for AC Wireline Conducted Emissions (150 kHz – 30 MHz)

Ambient conditions.


Temperature: 17 to 23 °C    Relative humidity: 31 to 57 %    Pressure: 999 to 1012 mbar



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 117 of 407

### Laptop 120 Vac, 60 Hz Supply Voltage

<b>Test Freq.</b>	N/A	<b>Engineer</b>	JMH
<b>Variant</b>	AC Line Emissions	<b>Temp (°C)</b>	28
<b>Freq. Range</b>	0.150 MHz - 30 MHz	<b>Rel. Hum.(%)</b>	37
<b>Power Setting</b>	Maximum	<b>Press. (mBars)</b>	998
<b>Antenna</b>	Terminated in 50 Ω		
<b>Test Notes 1</b>	120V 60 Ha, module installed in laptop		
<b>Test Notes 2</b>			

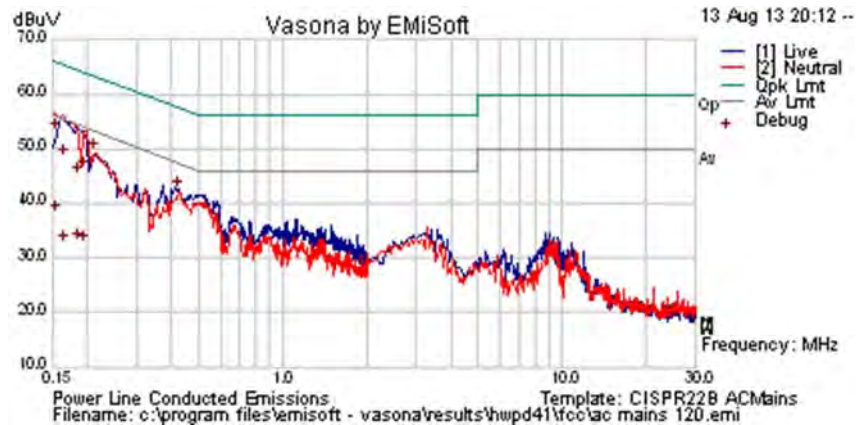

### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line	Limit dBuV	Margin dB	Pass /Fail	Comments
0.155	43.3	9.9	0.1	53.2	Quasi Peak	Neutral	65.73	-12.5	Pass	
0.155	28.1	9.9	0.1	38.1	Average	Neutral	55.73	-17.6	Pass	
0.166	38.2	9.9	0.1	48.2	Quasi Peak	Neutral	65.16	-17.0	Pass	
0.166	22.6	9.9	0.1	32.6	Average	Neutral	55.16	-22.6	Pass	
0.187	23.0	9.9	0.1	32.9	Average	Live	54.17	-21.2	Pass	
0.187	35.1	9.9	0.1	45.1	Quasi Peak	Live	64.17	-19.1	Pass	
0.196	22.3	9.9	0.1	32.3	Average	Neutral	53.78	-21.5	Pass	
0.196	36.1	9.9	0.1	46.0	Quasi Peak	Neutral	63.78	-17.8	Pass	
0.213	39.3	9.9	0.1	49.3	Peak [Scan]	Neutral	53.09	-3.8	Pass	
0.426	32.5	9.9	0.1	42.5	Peak [Scan]	Live	47.33	-4.9	Pass	

Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency  
 NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## Specification

### Limit

**§15.207 (a)** Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu\Omega$  line impedance stabilization network (LISN), see §15.207 (a) matrix below. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

### RSS-Gen §7.2.2

The radio frequency voltage that is conducted back into the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table below. The tighter limit applies at the frequency range boundaries.

### §15.207 (a) and RSS-Gen §7.2.2 Limit Matrix

The lower limit applies at the boundary between frequency ranges

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency

### Laboratory Measurement Uncertainty for Conducted Emissions

Measurement uncertainty	$\pm 2.64$ dB
-------------------------	---------------

### Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-EMC-01 'Measurement of Conducted Emissions'	0158, 0184, 0287, 0190, 0293, 0307



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 119 of 407

#### 6.1.4. Dynamic Frequency Selection (DFS)

FCC, Part 15 Subpart C §15.407(h)  
FCC 06-96 Memorandum Opinion and Order  
Industry Canada RSS-210 A9.4

##### 6.1.4.1. Interference Threshold values, Master or Client incorporating In-Service Monitoring

Maximum Transmit Power	Value (see note)
≥ 200 milliwatt	-64 dBm
< 200 milliwatt	-62 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna

##### 6.1.4.2. DFS Response requirement values

Parameter	Value
<i>Non-occupancy period</i>	Minimum 30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds See Note 1.
<i>Channel Closing Transmission Time</i>	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
<i>U-NII Detection Bandwidth</i>	Minimum 80% of the 99% power bandwidth See Note 3.

Note 1: The instant that the *Channel Move Time* and the *Channel Closing Transmission Time* begins is as follows:

- For the Short pulse radar Test Signals this instant is the end of the *Burst*.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar *Burst* generated.
- For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.

Note 2: The *Channel Closing Transmission Time* is comprised of 200 milliseconds starting at the beginning of the *Channel Move Time* plus any additional intermittent control signals required to facilitate *Channel* changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the *U-NII Detection Bandwidth* detection test, radar type 1 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 6.1.4.3. Radar Test Waveforms

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

#### Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Trials
1	1	1428	18	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

A minimum of 30 unique waveforms are required for each of the short pulse radar types 2 through 4. For short pulse radar type 1, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for short pulse radar types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.

#### Long Pulse Radar Test Waveform

Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse radar test signal. If more than 30 waveforms are used for the Long Pulse radar test signal, then each additional waveform must also be unique and not repeated from the previous waveforms.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 121 of 407

---

Each waveform is defined as follows:

- 1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- 2) There are a total of 8 to 20 *Bursts* in the 12 second period, with the number of *Bursts* being randomly chosen. This number is *Burst Count*.
- 3) Each *Burst* consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each *Burst* within the 12 second sequence may have a different number of pulses.
- 4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a *Burst* will have the same pulse width. Pulses in different *Bursts* may have different pulse widths.
- 5) Each pulse has a linear FM chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a *Burst* will have the same chirp width. Pulses in different *Bursts* may have different chirp widths. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- 6) If more than one pulse is present in a *Burst*, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a *Burst*, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- 7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to *Burst\_Count*. Each interval is of length  $(12,000,000 / \textit{Burst\_Count})$  microseconds. Each interval contains one *Burst*. The start time for the *Burst*, relative to the beginning of the interval, is between 1 and  $[(12,000,000 / \textit{Burst\_Count}) - (\textit{Total Burst Length}) + (\textit{One Random PRI Interval})]$  microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each *Burst* is chosen independently.


---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

**A representative example of a Long Pulse radar test waveform:**

- 1) The total test signal length is 12 seconds.
- 2) 8 *Bursts* are randomly generated for the *Burst\_Count*.
- 3) *Burst 1* has 2 randomly generated pulses.
- 4) The pulse width (for both pulses) is randomly selected to be 75 microseconds.
- 5) The PRI is randomly selected to be at 1213 microseconds.
- 6) *Bursts 2* through 8 are generated using steps 3 – 5.
- 7) Each *Burst* is contained in even intervals of 1,500,000 microseconds. The starting location for Pulse 1, *Burst 1* is randomly generated (1 to 1,500,000 minus the total *Burst 1* length + 1 random PRI interval) at the 325,001 microsecond step. *Bursts 2* through 8 randomly fall in successive 1,500,000 microsecond intervals (i.e. *Burst 2* falls in the 1,500,001 – 3,000,000 microsecond range).

**Graphical representation of the Long Pulse radar Test Waveform.**

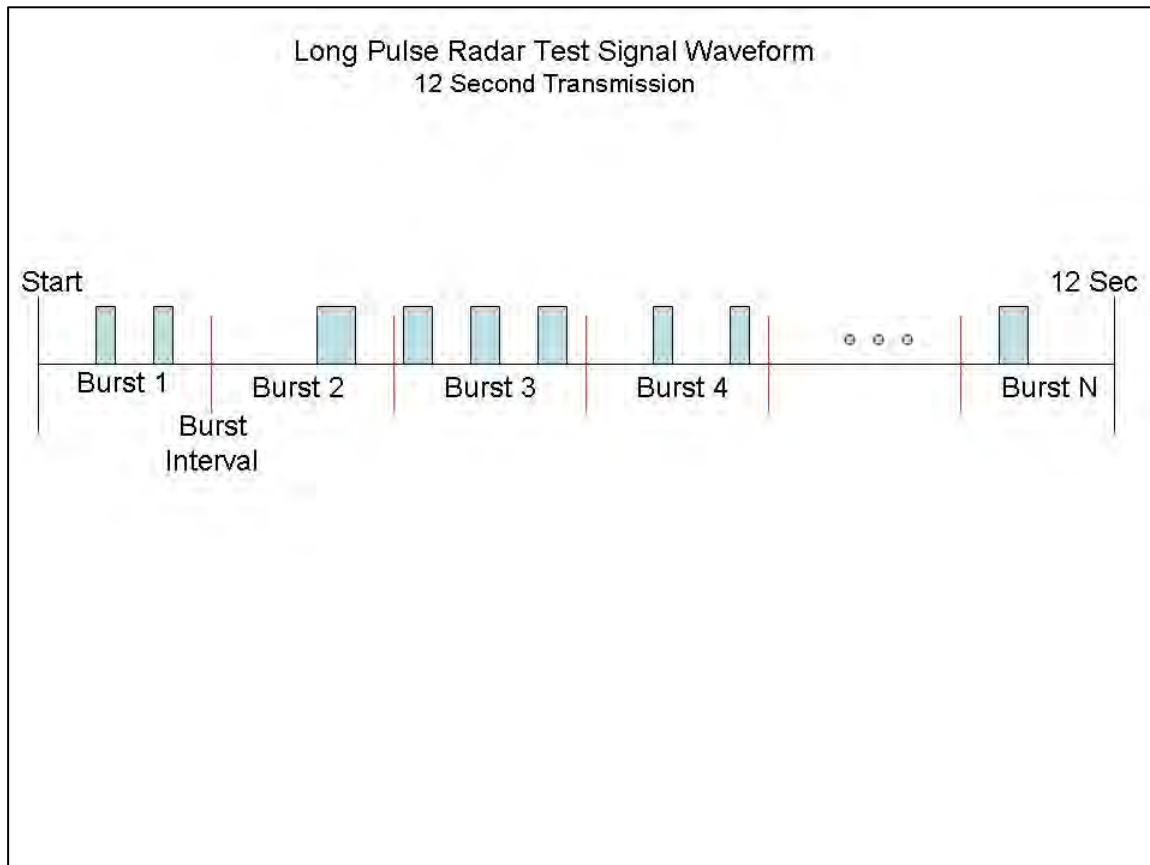

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



#### 6.1.4.4. Frequency Hopping Radar Test Waveform

**Frequency Hopping Radar Test Waveform**


Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	.333	300	70%	30

For the Frequency Hopping Radar Type, the same *Burst* parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:

#### 6.1.4.5. Radar Waveform Calibration

The following equipment setup was used to calibrate the conducted Radar Waveform. A spectrum analyzer was used to establish the test signal level for each radar type. During this process there were no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) mode at the frequency of the Radar Waveform generator. Peak detection was utilized. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz.

The signal generator amplitude was set so that the power level measured at the spectrum analyzer was -61dBm (Ref Section 5.1). The 30dB amplifier gain was entered as an amplitude offset on the spectrum analyzer.

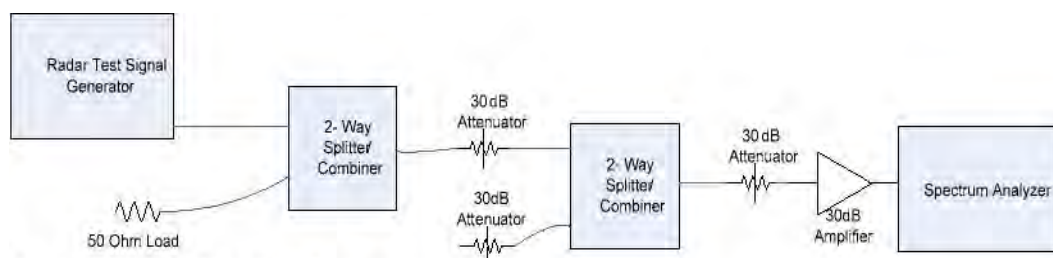


**Conducted Calibration Setup**







### 6.1.4.6. Weather Radar Band Edge Plots

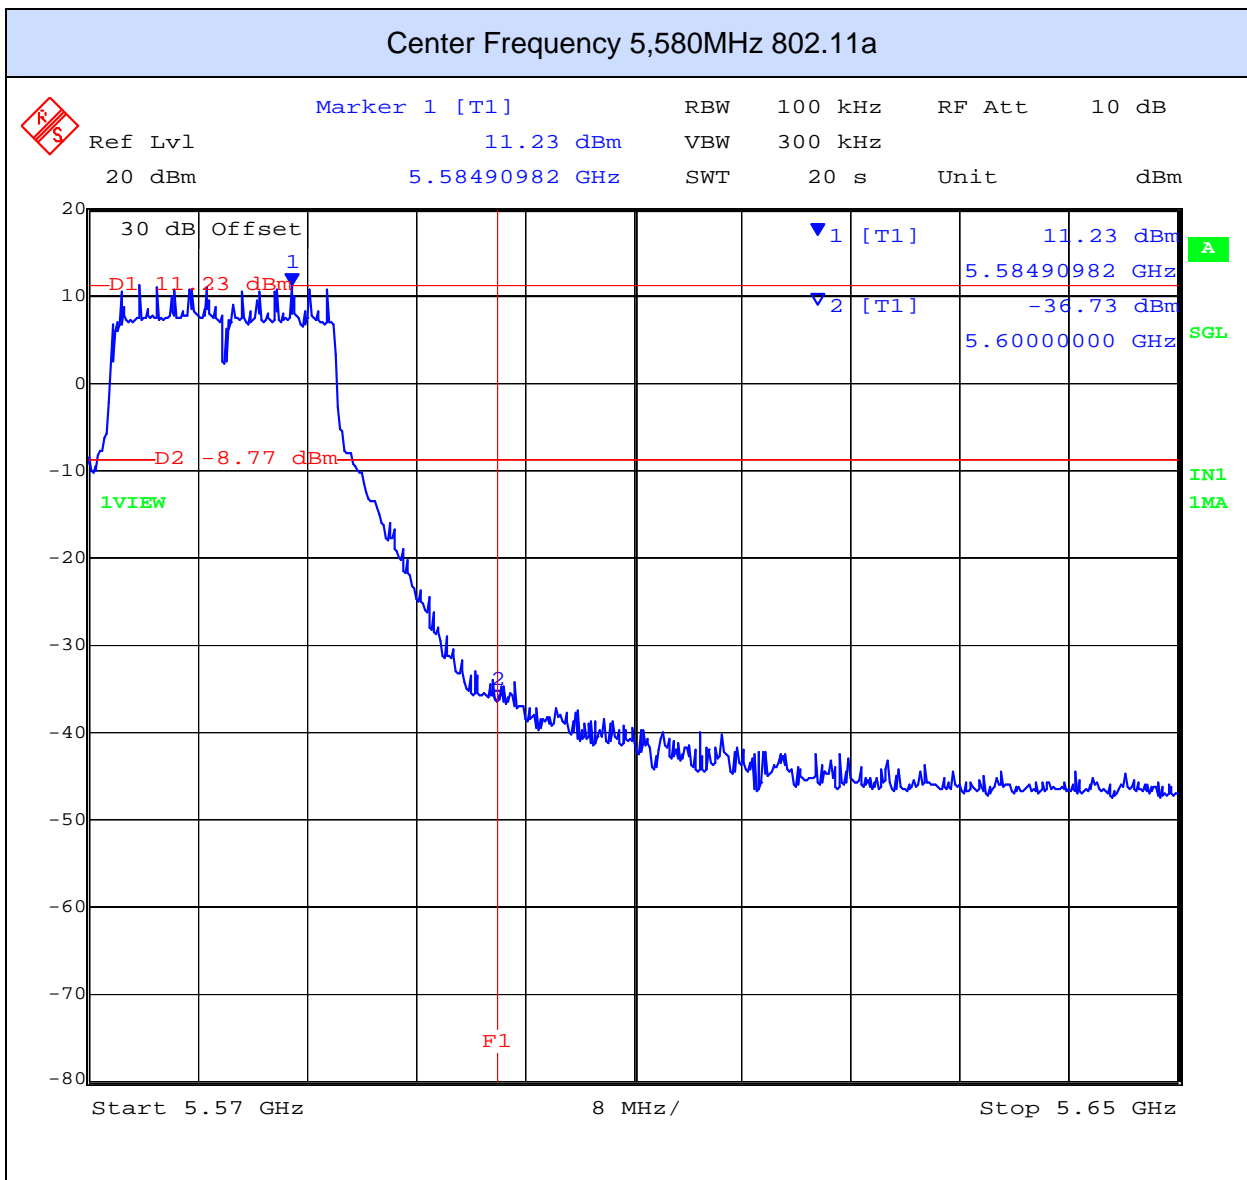


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

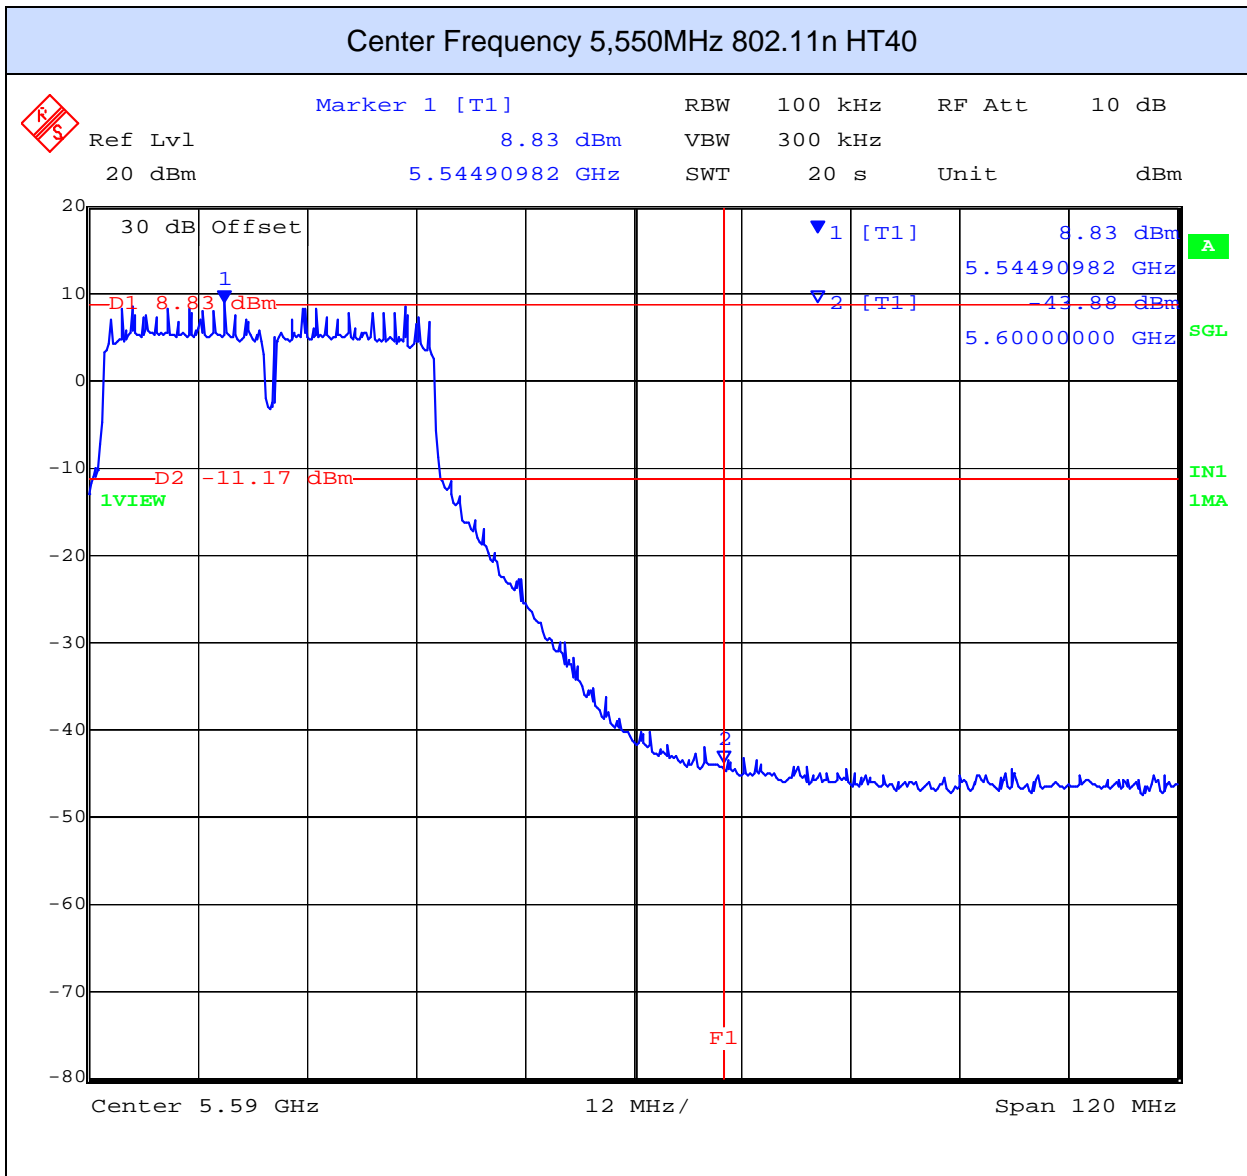


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

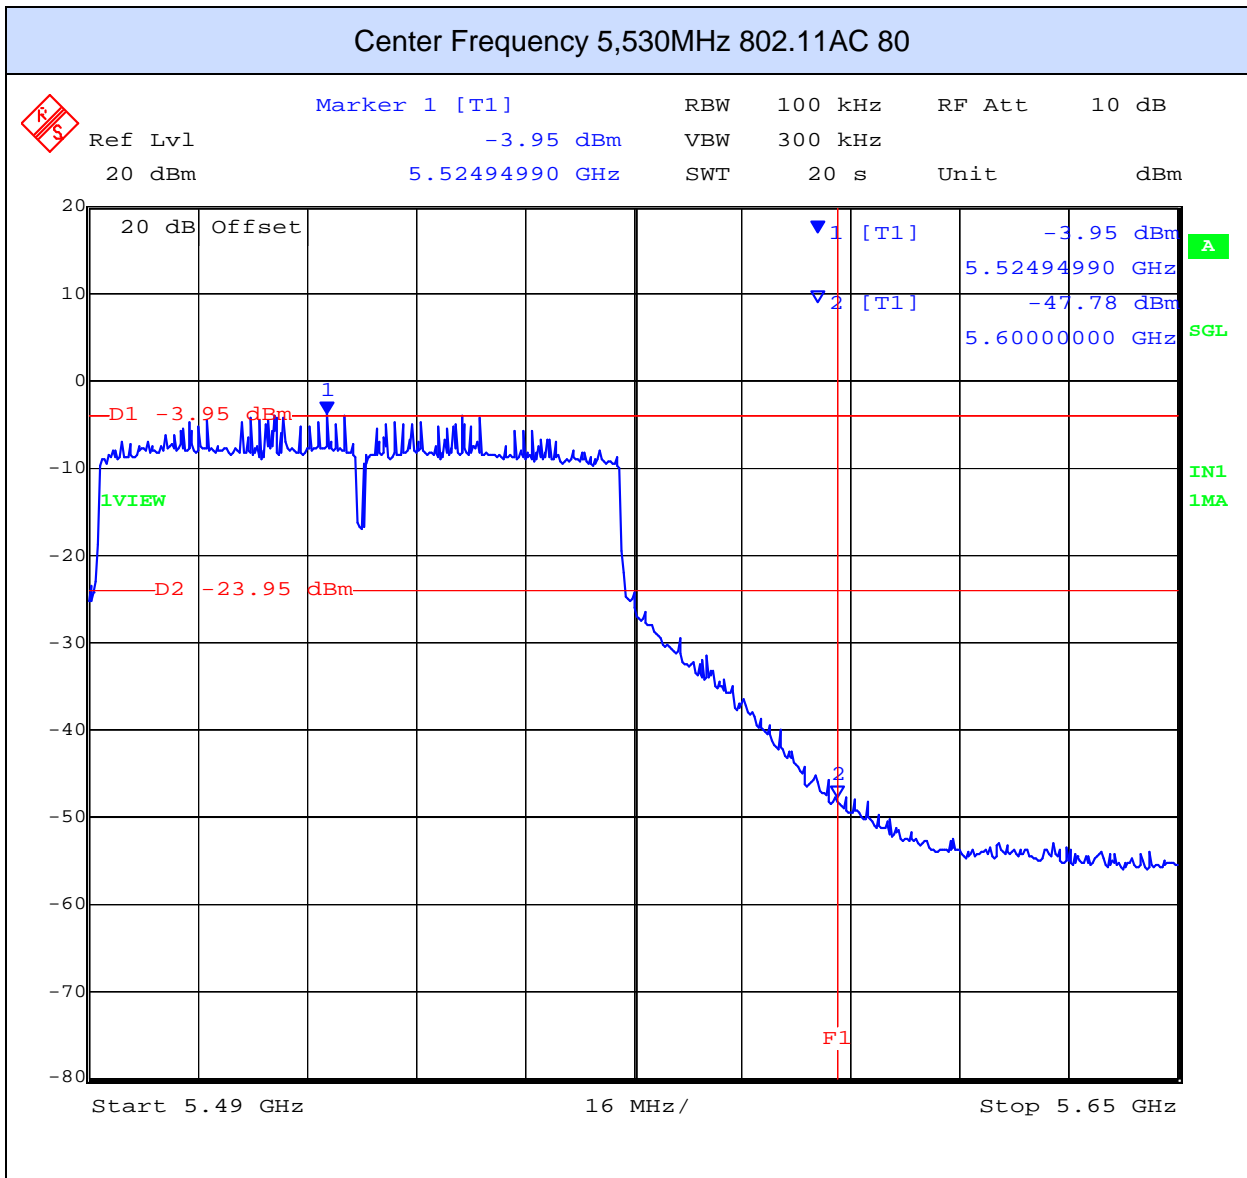


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

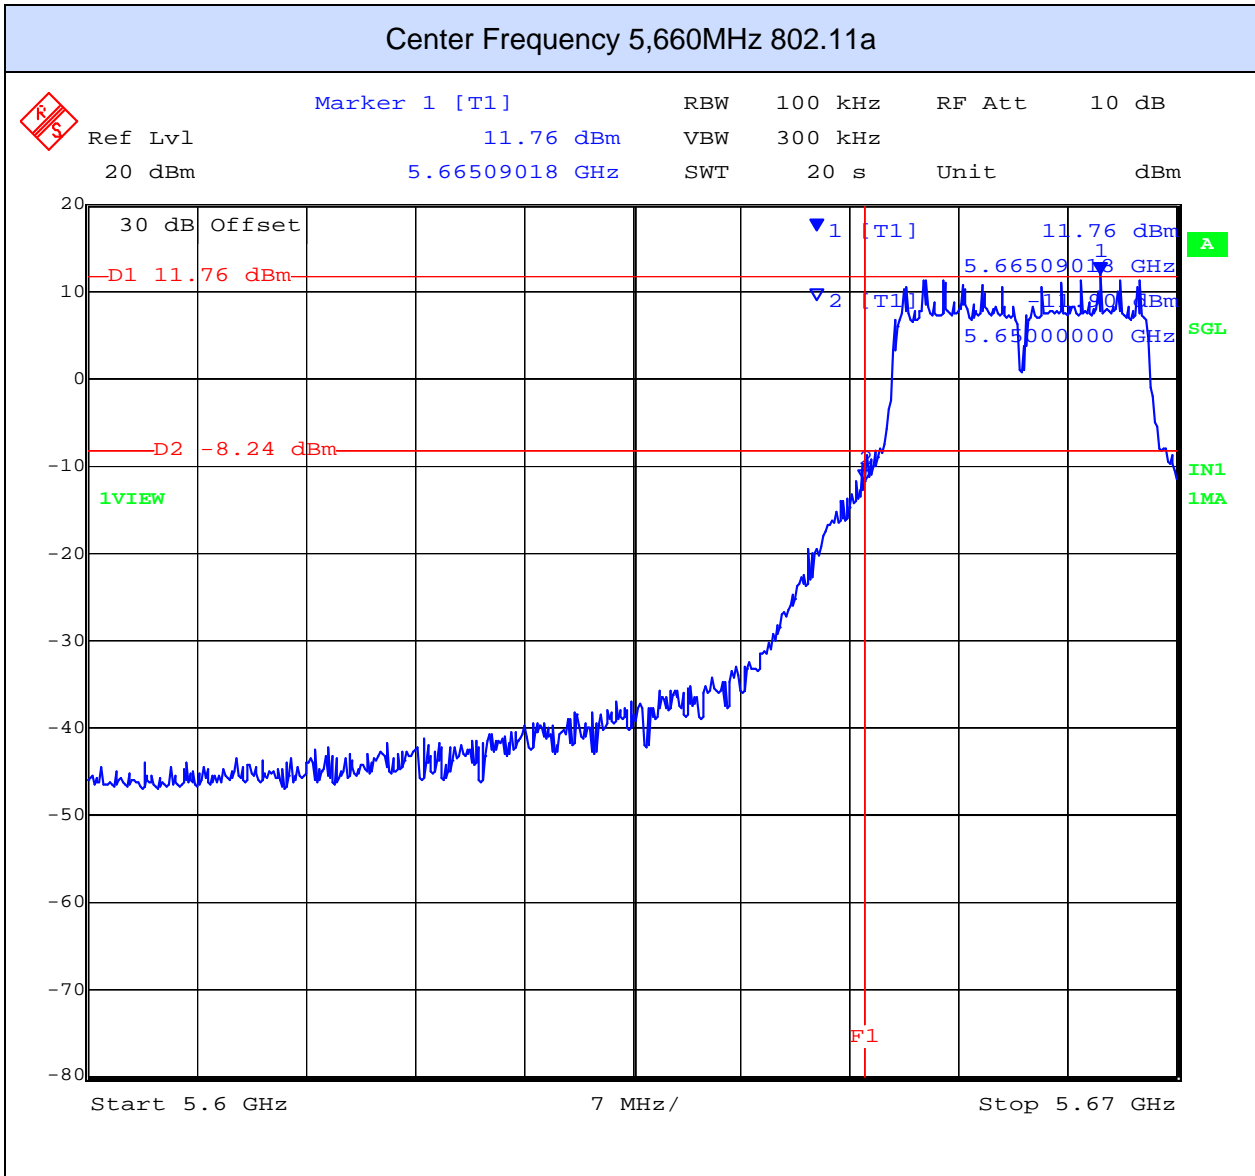

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

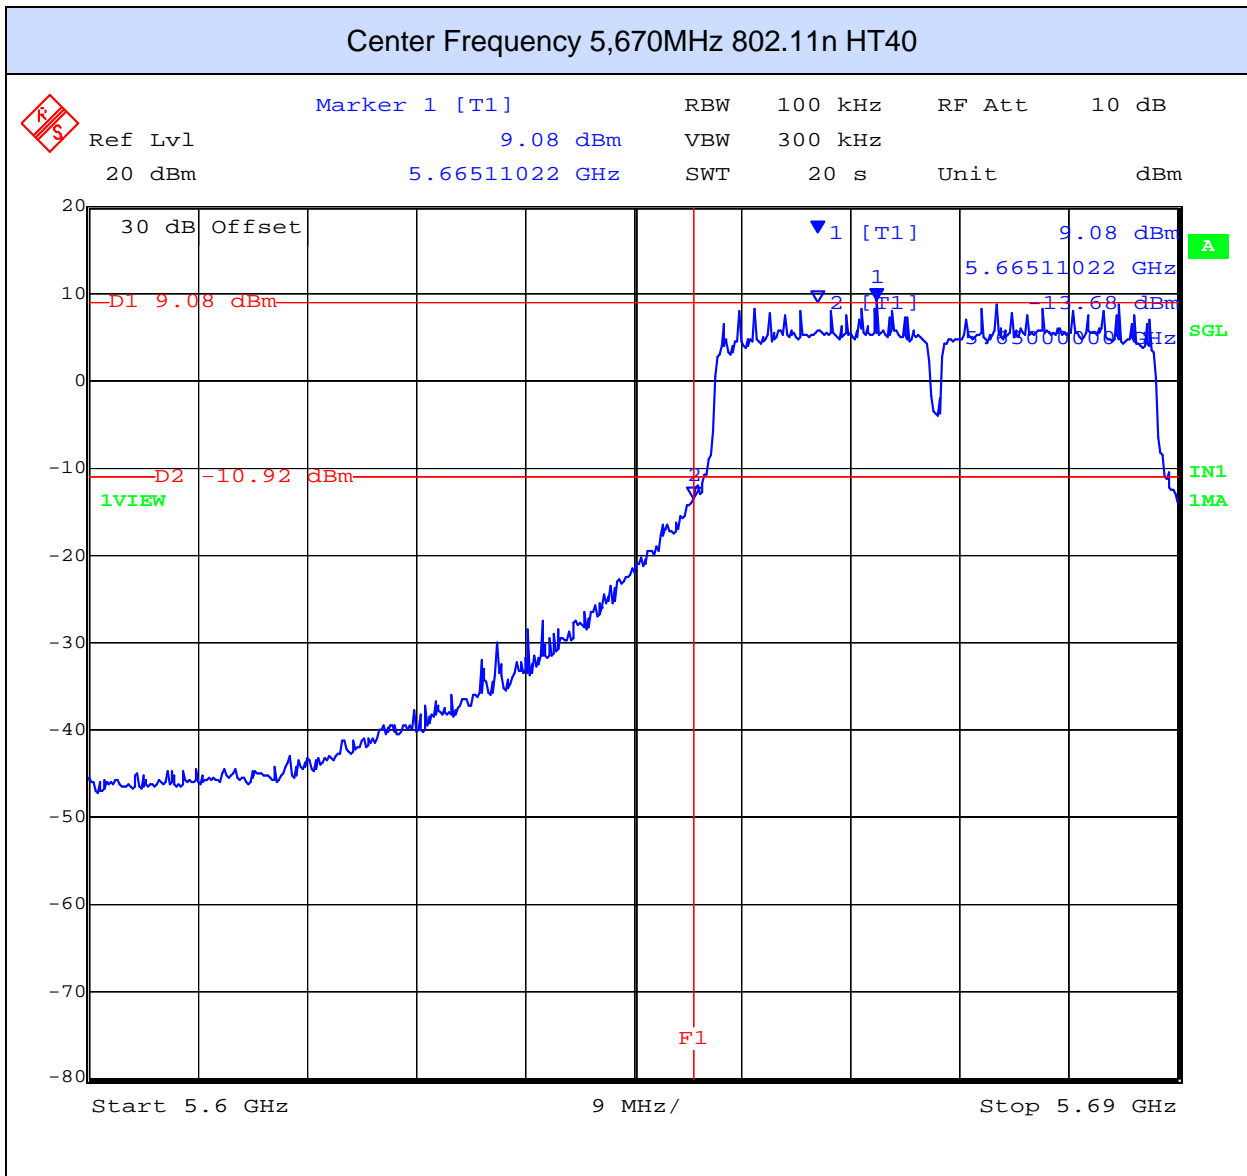

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

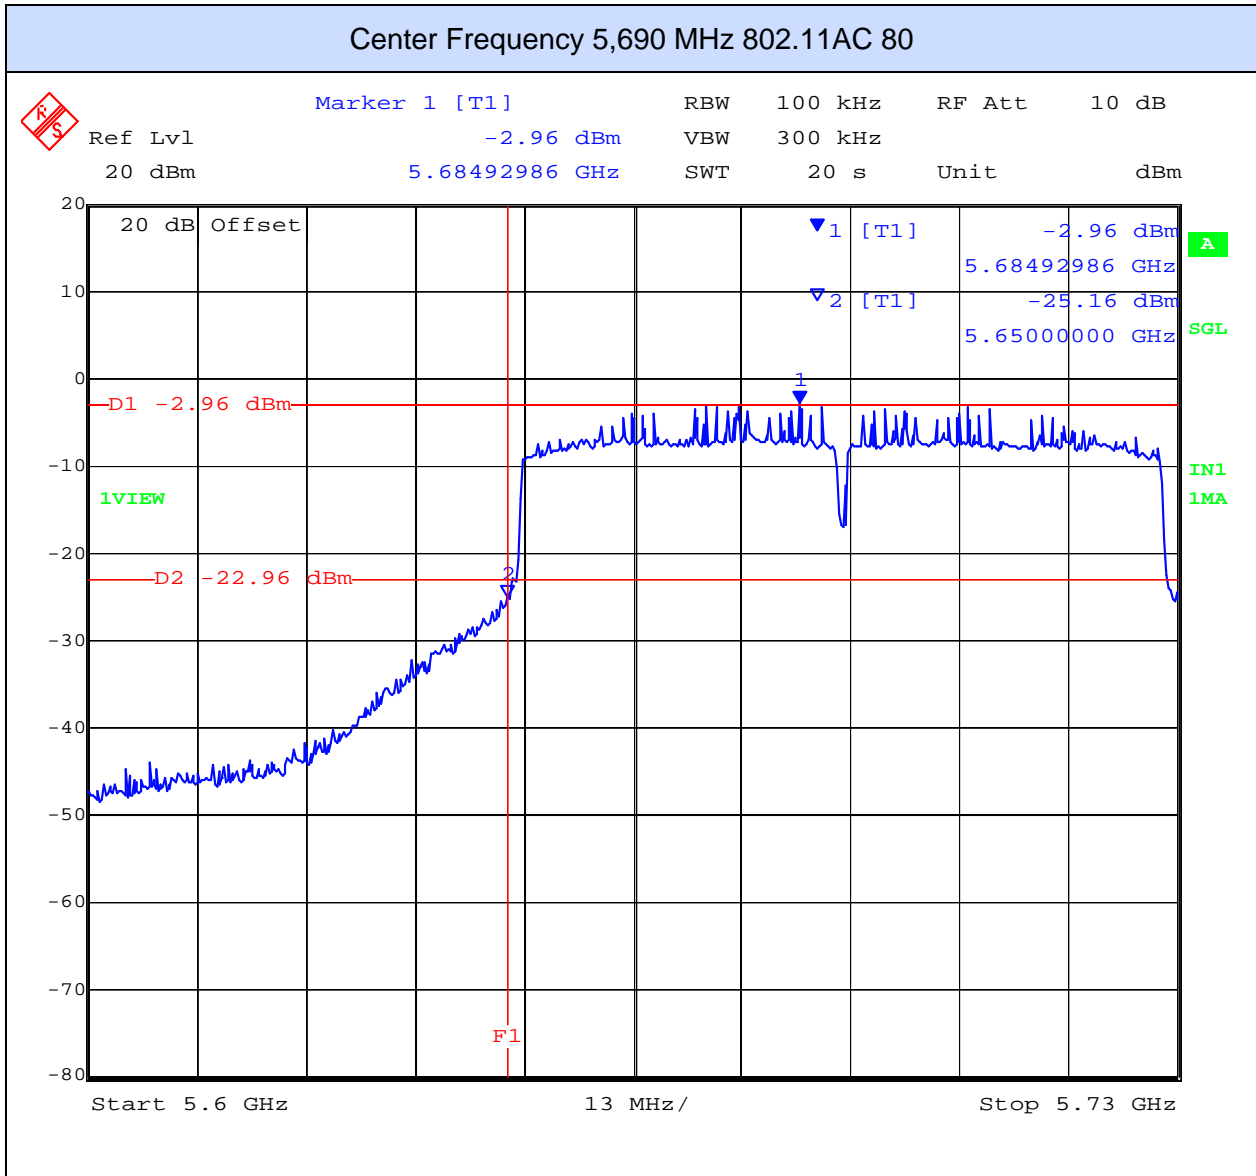


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


### 6.1.4.7. Test Set Up:

#### Block Diagram(s) of Test Setup

Setup for Conducted Measurements where the EUT is the Master with injection of Radar Test Waveforms at the Master.

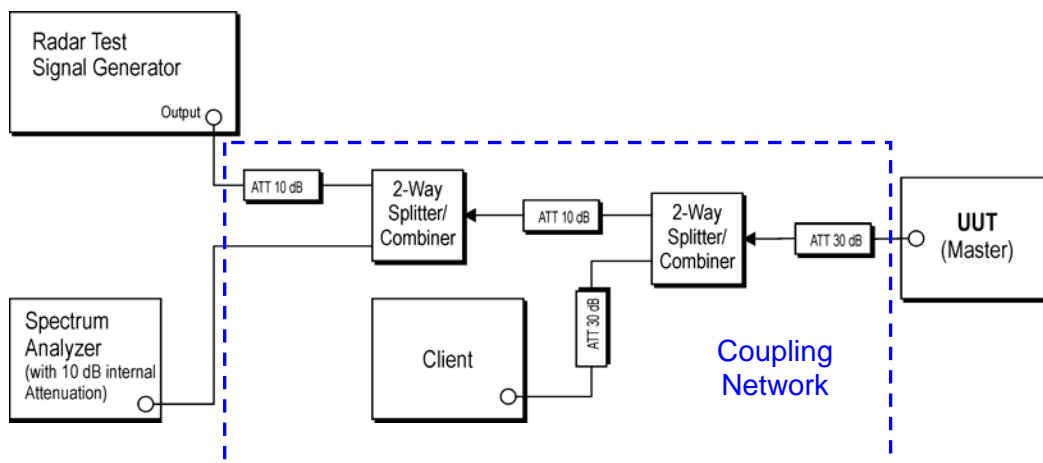

#### Support Equipment Configuration

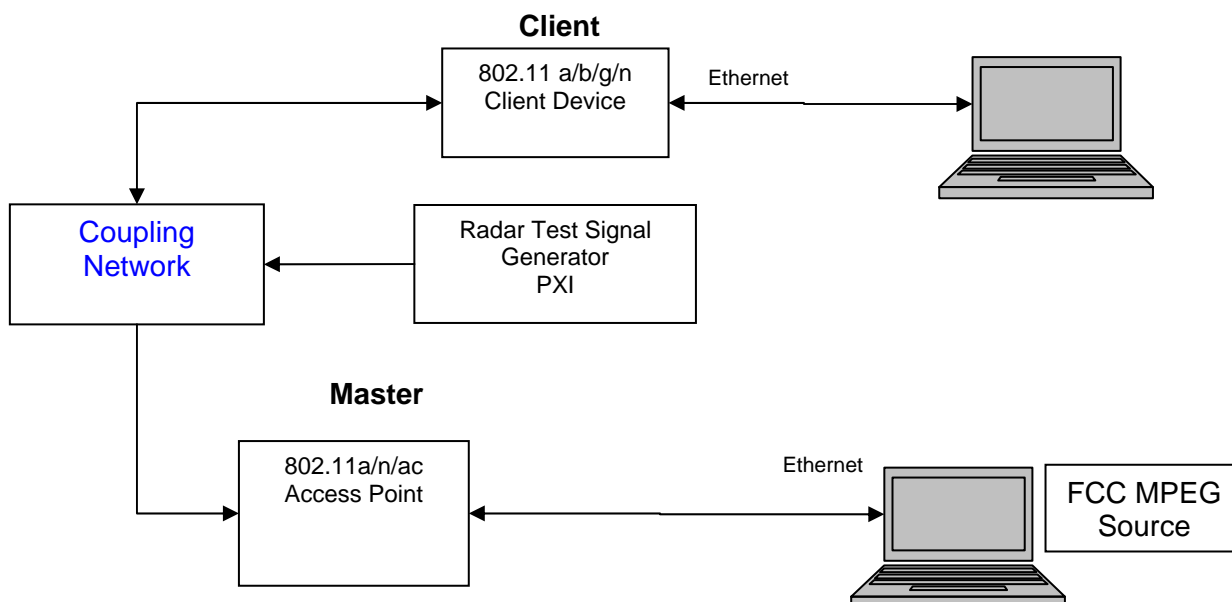

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



The EUT is a Master Device with radar detection.

**Applicability of DFS Requirements Prior to Use of a Channel**  
**(Ref Table 1 of FCC 06-96)**

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
<i>Non-Occupancy Period</i>	Yes	Not required	Yes
<i>DFS Detection Threshold</i>	Yes	Not required	Yes
<i>Channel Availability Check Time</i>	Yes	Not required	Not required
<i>Uniform Spreading</i>	Yes	Not required	Not required
<i>U-NII Detection Bandwidth</i>	Yes	Not required	Yes

**Applicability of DFS requirements during normal operation**  
**(Ref Table 2 of FCC 06-96)**

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
<i>DFS Detection Threshold</i>	Yes	Not required	Yes
<i>Channel Closing Transmission Time</i>	Yes	Yes	Yes
<i>Channel Move Time</i>	Yes	Yes	Yes
<i>U-NII Detection Bandwidth</i>	Yes	Not required	Yes

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 132 of 407

---

For the frequency band 5,470 – 5,725 MHz, the Master device provides, on aggregate, uniform loading of the spectrum across all devices by selecting an operating channel among the available channels using a random algorithm. The EUT was tested in HT-40 mode.

Declared minimum antenna gain 0 dBi. ;

Radar receive signal level = -62 dBm + minimum antenna gain + 1 dB

$$= -62 + 0 + 1$$

Radar receive signal level = -61 dBm

### **Measurement Results - Dynamic Frequency Selection (DFS)**

Ambient conditions.

Temperature: 17 to 23 °C    Relative humidity: 31 to 57%    Pressure: 999 to 1012 mbar

Radio parameters.

Test methodology: Conducted

Device Type: Master

Transmit Power: Maximum

### **Operational Details - Dynamic Frequency Selection (DFS)**

Operational Modes: 802.11a, 802.11n HT40, 802.11AC80

Data Rates: 6mpbs 802.11a, 0MCS 802.11n, MCS0 802.11AC

*\*Note\* No video pixilation was observed during the video stream at these rates. Video frames per second were noted to be at 30fps.*

### **Video Streaming Method - Dynamic Frequency Selection (DFS)**

Using the VideoLan player a video stream was setup on the master laptop with the destination being the client laptop. The video profile chosen for the video stream is “MPEG-2 + MPGA (TS)”. On the client laptop the VideoLan player was setup to listen to an incoming video stream from the master device.

The requisite MPEG video file (“TestFile.mpg” available on the NTIA website at the following link <http://ntiacsd.ntia.doc.gov/dfs/>) is used during this video stream.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 133 of 407

---

#### **6.1.4.8. UNII Detection Bandwidth:**

All UNII channels for this device have identical channel bandwidths and DFS testing was completed on channel 5,500 MHz (802.11a) and 5510MHz (HT40).

The generating equipment is configured as shown in the Conducted Test Setup above. A single Burst of the short pulse radar Type 1 through 6 was produced at 5,500 MHz (802.11a) and 5,510 MHz (802.11n HT40) at a level of -61 dBm (Ref Section 5.1). The EUT is set up as a standalone device (no associated Client and no traffic).

A single radar Burst is generated for a minimum of 10 trials, and the response of the EUT is noted. The EUT must detect the Radar Waveform 90% or more of the time.

The radar frequency is increased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The highest frequency at which detection is greater than or equal to 90% is denoted as  $F_H$ .

The radar frequency is decreased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The lowest frequency at which detection is greater than or equal to 90% is denoted as  $F_L$ .

The U-NII Detection Bandwidth is calculated as follows:

$$\text{U-NII Detection Bandwidth} = F_H - F_L$$

The U-NII Detection Bandwidth must be at least 80% of the EUT transmitter 99% power Table of results are continued on the next page.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 134 of 407

EUT Frequency= 5,500 MHz 802.11a (Detection = √, No Detection = 0)											
Radar Frequency (MHz)	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
-20											%
-19											%
-18											%
-17											%
-16											%
-15											%
-14											%
-13											%
-12											%
-11	0	0									<90%
-10	√	√	√	√	√	√	√	√	√	√	100%
-9	√	√	√	√	√	√	√	√	√	√	90%
-8	√	√	√	√	√	√	√	√	√	√	100%
-7	√	√	√	√	√	√	√	√	√	√	100%
-6	√	√	√	√	√	√	√	√	√	√	100%
-5	√	√	√	√	√	√	√	√	√	√	100%
-4	√	√	√	√	√	√	√	√	√	√	90%
-3	√	√	√	√	√	√	√	√	√	√	100%
-2	√	√	√	√	√	√	√	√	√	√	100%
-1	√	√	√	√	√	√	√	√	√	√	100%
F <sub>0</sub>	√	√	√	√	√	√	√	√	√	√	100%
+1	√	√	√	√	√	√	√	√	√	√	100%
+2	√	√	√	√	√	√	√	√	√	√	90%
+3	√	√	√	√	√	√	√	√	√	√	100%
+4	√	√	√	√	√	√	√	√	√	√	100%
+5	√	√	√	√	√	√	√	√	√	√	100%
+6	√	√	√	√	√	√	√	√	√	√	100%
+7	√	√	√	√	√	√	√	√	√	√	100%
+8	√	√	√	√	√	√	√	√	√	√	100%
+9	√	√	√	√	√	√	√	√	√	√	100%
+10	√	√	√	√	√	√	√	√	√	√	100%
+11	0	0									<90%
+12											%
+13											%
+14											%
+15											%
+16											%
+17											%

Detection Bandwidth =  $F_H - F_L = 5590 - 5510 = 20$  MHz  
 EUT 99% Bandwidth = 17.134 MHz (ref. bandwidth channel 5500 MHz)  
 17.134 MHz \*80% = 13.707MHz

For each frequency step the minimum percentage detection is 90%

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 135 of 407

EUT Frequency= 5,510 MHz 802.11n HT40 (Detection = √, No Detection = 0)											
Radar Frequency (MHz)	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
-21											%
-20	0	0									<90%
-19	v	v	v	v	v	v	v	v	v	v	100%
-18	v	v	v	v	v	v	v	v	v	v	100%
-17	v	v	v	v	v	v	v	v	v	v	100%
-16	v	v	v	v	v	v	v	v	v	v	100%
-15	v	v	v	v	v	v	v	v	v	v	100%
-14	v	v	v	v	v	v	v	v	v	v	100%
-13	v	v	v	v	v	v	v	v	v	v	100%
-12	v	v	v	v	v	v	v	v	v	v	100%
-11	v	v	v	v	v	v	v	v	v	v	100%
-10	v	v	v	v	v	v	v	v	v	v	100%
-9	v	v	v	v	v	v	v	v	v	v	100%
-8	v	v	v	v	v	v	v	v	v	v	100%
-7	v	v	v	v	v	v	v	v	v	v	100%
-6	v	v	v	v	v	v	v	v	v	v	100%
-5	v	v	v	v	v	v	v	v	v	v	100%
-4	v	v	v	v	v	v	v	v	v	v	100%
-3	v	v	v	v	v	v	v	v	v	v	100%
-2	v	v	v	v	v	v	v	v	v	v	100%
-1	v	v	v	v	v	v	v	v	v	v	100%
F <sub>0</sub>	v	v	v	v	v	v	v	v	v	v	100%

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 136 of 407

EUT Frequency= 5,510 MHz 802.11n HT40 (Detection = √, No Detection = 0)											
Radar Frequency (MHz)	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
F <sub>0</sub>	v	v	v	v	v	v	v	v	v	v	100%
+1	v	v	v	v	v	v	v	v	v	v	100%
+2	v	v	v	v	v	v	v	v	v	v	100%
+3	v	v	v	v	v	v	v	v	v	v	100%
+4	v	v	v	v	v	v	v	v	v	v	100%
+5	v	v	v	v	v	v	v	v	v	v	100%
+6	v	v	v	v	v	v	v	v	v	v	100%
+7	v	v	v	v	v	v	v	v	v	v	100%
+8	v	v	v	v	v	v	v	v	v	v	100%
+9	v	v	v	v	v	v	v	v	v	v	100%
+10	v	v	v	v	v	v	v	v	v	v	100%
+11	v	v	v	v	v	v	v	v	v	v	100%
+12	v	v	v	v	v	v	v	v	v	v	100%
+13	v	v	v	v	v	v	v	v	v	v	100%
+14	v	v	v	v	v	v	v	v	v	v	100%
+15	v	v	v	v	v	v	v	v	v	v	100%
+16	v	v	v	v	v	v	v	v	v	v	100%
+17	v	v	v	v	v	v	v	v	v	v	100%
+18	v	v	v	v	v	v	v	v	v	v	100%
+19	v	v	v	v	v	v	v	v	v	v	100%
+20	v	0	0								<90%
+21											%
Detection Bandwidth = F <sub>H</sub> -F <sub>L</sub> = 5590-5530 = 40 MHz											
EUT 99% Bandwidth = 36.472 MHz (ref. bandwidth channel 5510 MHz)											
36.472 MHz *80% = 29.177 MHz											

For each frequency step the minimum percentage detection is 90%

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 137 of 407

EUT Frequency= 5,530 MHz 802.11n HT80 (Detection = √, No Detection = 0)											
Radar Frequency (MHz)	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
-41	0	0									<90%
-40	v	v	v	v	v	v	v	v	v	v	100%
-39	v	v	v	v	v	v	v	v	v	v	100%
-38	v	v	v	v	v	v	v	v	v	v	100%
-37	v	v	v	v	v	v	v	v	v	v	100%
-36	v	v	v	v	v	v	v	v	v	v	100%
-35	v	v	v	v	v	v	v	v	v	v	100%
-34	v	v	v	v	v	v	v	v	v	v	100%
-33	v	v	v	v	v	v	v	v	v	v	100%
-32	v	v	v	v	v	v	v	v	v	v	100%
-31	v	v	v	v	v	v	v	v	v	v	100%
-30	v	v	v	v	v	v	v	v	v	v	100%
-29	v	v	v	v	v	v	v	v	v	v	100%
-28	v	v	v	v	v	v	v	v	v	v	100%
-27	v	v	v	v	v	v	v	v	v	v	100%
-26	v	v	v	v	v	v	v	v	v	v	100%
-25	v	v	v	v	v	v	v	v	v	v	100%
-24	v	v	v	v	v	v	v	v	v	v	100%
-23	v	v	v	v	v	v	v	v	v	v	100%
-22	v	v	v	v	v	v	v	v	v	v	100%
-21	v	v	v	v	v	v	v	v	v	v	100%
-20	v	v	v	v	v	v	v	v	v	v	100%
-19	v	v	v	v	v	v	v	v	v	v	100%
-18	v	v	v	v	v	v	v	v	v	v	100%
-17	v	v	v	v	v	v	v	v	v	v	100%
-16	v	v	v	v	v	v	v	v	v	v	100%
-15	v	v	v	v	v	v	v	v	v	v	100%
-14	v	v	v	v	v	v	v	v	v	v	100%
-13	v	v	v	v	v	v	v	v	v	v	100%
-12	v	v	v	v	v	v	v	v	v	v	100%
-11	v	v	v	v	v	v	v	v	v	v	100%
-10	v	v	v	v	v	v	v	v	v	v	100%
-9	v	v	v	v	v	v	v	v	v	v	100%
-8	v	v	v	v	v	v	v	v	v	v	100%
-7	v	v	v	v	v	v	v	v	v	v	100%
-6	v	v	v	v	v	v	v	v	v	v	100%
-5	v	v	v	v	v	v	v	v	v	v	100%
-4	v	v	v	v	v	v	v	v	v	v	100%
-3	v	v	v	v	v	v	v	v	v	v	100%
-2	v	v	v	v	v	v	v	v	v	v	100%
-1	v	v	v	v	v	v	v	v	v	v	100%
F <sub>0</sub>	v	v	v	v	v	v	v	v	v	v	100%

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 138 of 407

EUT Frequency= 5,530 MHz 802.11n HT80 (Detection = √, No Detection = 0)											
Radar Frequency (MHz)	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
+1	v	v	v	v	v	v	v	v	v	v	100%
+2	v	v	v	v	v	v	v	v	v	v	100%
+3	v	v	v	v	v	v	v	v	v	v	100%
+4	v	v	v	v	v	v	v	v	v	v	100%
+5	v	v	v	v	v	v	v	v	v	v	100%
+6	v	v	v	v	v	v	v	v	v	v	100%
+7	v	v	v	v	v	v	v	v	v	v	100%
+8	v	v	v	v	v	v	v	v	v	v	100%
+9	v	v	v	v	v	v	v	v	v	v	100%
+10	v	v	v	v	v	v	v	v	v	v	100%
+11	v	v	v	v	v	v	v	v	v	v	100%
+12	v	v	v	v	v	v	v	v	v	v	100%
+13	v	v	v	v	v	v	v	v	v	v	100%
+14	v	v	v	v	v	v	v	v	v	v	100%
+15	v	v	v	v	v	v	v	v	v	v	100%
+16	v	v	v	v	v	v	v	v	v	v	100%
+17	v	v	v	v	v	v	v	v	v	v	100%
+18	v	v	v	v	v	v	v	v	v	v	100%
+19	v	v	v	v	v	v	v	v	v	v	100%
+20	v	v	v	v	v	v	v	v	v	v	100%
+21	v	v	v	v	v	v	v	v	v	v	100%
+22	v	v	v	v	v	v	v	v	v	v	100%
+23	v	v	v	v	v	v	v	v	v	v	100%
+24	v	v	v	v	v	v	v	v	v	v	100%
+25	v	v	v	v	v	v	v	v	v	v	100%
+26	v	v	v	v	v	v	v	v	v	v	100%
+27	v	v	v	v	v	v	v	v	v	v	100%
+28	v	v	v	v	v	v	v	v	v	v	100%
+29	v	v	v	v	v	v	v	v	v	v	100%
+30	v	v	v	v	v	v	v	v	v	v	100%
+31	v	v	v	v	v	v	v	v	v	v	100%
+32	v	v	v	v	v	v	v	v	v	v	100%
+33	v	v	v	v	v	v	v	v	v	v	100%
+34	v	v	v	v	v	v	v	v	v	v	100%
+35	v	v	v	v	v	v	v	v	v	v	100%
+36	v	v	v	v	v	v	v	v	v	v	100%
+37	v	v	v	v	v	v	v	v	v	v	100%
+38	v	v	v	v	v	v	v	v	v	v	100%
+39	v	v	v	v	v	v	v	v	v	v	100%
+40	v	v	v	v	v	v	0	v	v	v	90%
+41	0	0									< 90%
Detection Bandwidth = $F_H - F_L = 5531 - 5489 = 42$ MHz											
EUT 99% Bandwidth = 36.6 MHz (ref. bandwidth channel 5510 MHz)											
36.6 MHz *80% = 29.28 MHz											

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 139 of 407

---

#### 6.1.4.9. Initial Channel Availability Check Time

This test verifies that the EUT does not emit pulse, control, or data signals on the test Channel until the power-up sequence has been completed and the U-NII device checks for Radar Waveforms for one minute on the test Channel. This test does not use any Radar Waveforms.

The U-NII device is powered on and be instructed to operate at 5,500MHz 802.11a, 5,510MHz 802.11n HT40, and 802.11AC 80.. At the same time the EUT is powered on, the spectrum analyzer is set for zero span with a 1 MHz resolution bandwidth at 5,500, 5,510, and 5530 MHz with a 260 second sweep time. The analyzer's sweep will be started the same time power is applied to the U-NII device.

The EUT should not transmit any pulse or data transmissions until at least 1 minute after the completion of the power-on cycle.

The first red marker line shown on the following plot denotes the instant when the EUT starts its power-up sequence i.e.  $T_0$  (as defined within the FCC's MO&O 06-96 Normative Reference 2 ). The power-up reference  $T_0$  is determined by the time it takes for the EUT to start "beaconing" i.e. initial beacon – 60 secs = end of power-up.

The Channel Availability Check Time commences at instant  $T_0$  and will end no sooner than  $T_0 + 60$  seconds.


---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**EUT power up and Initial Channel Availability Check Time**  
**5,500MHz 802.11a Power On = 84.92 Seconds**

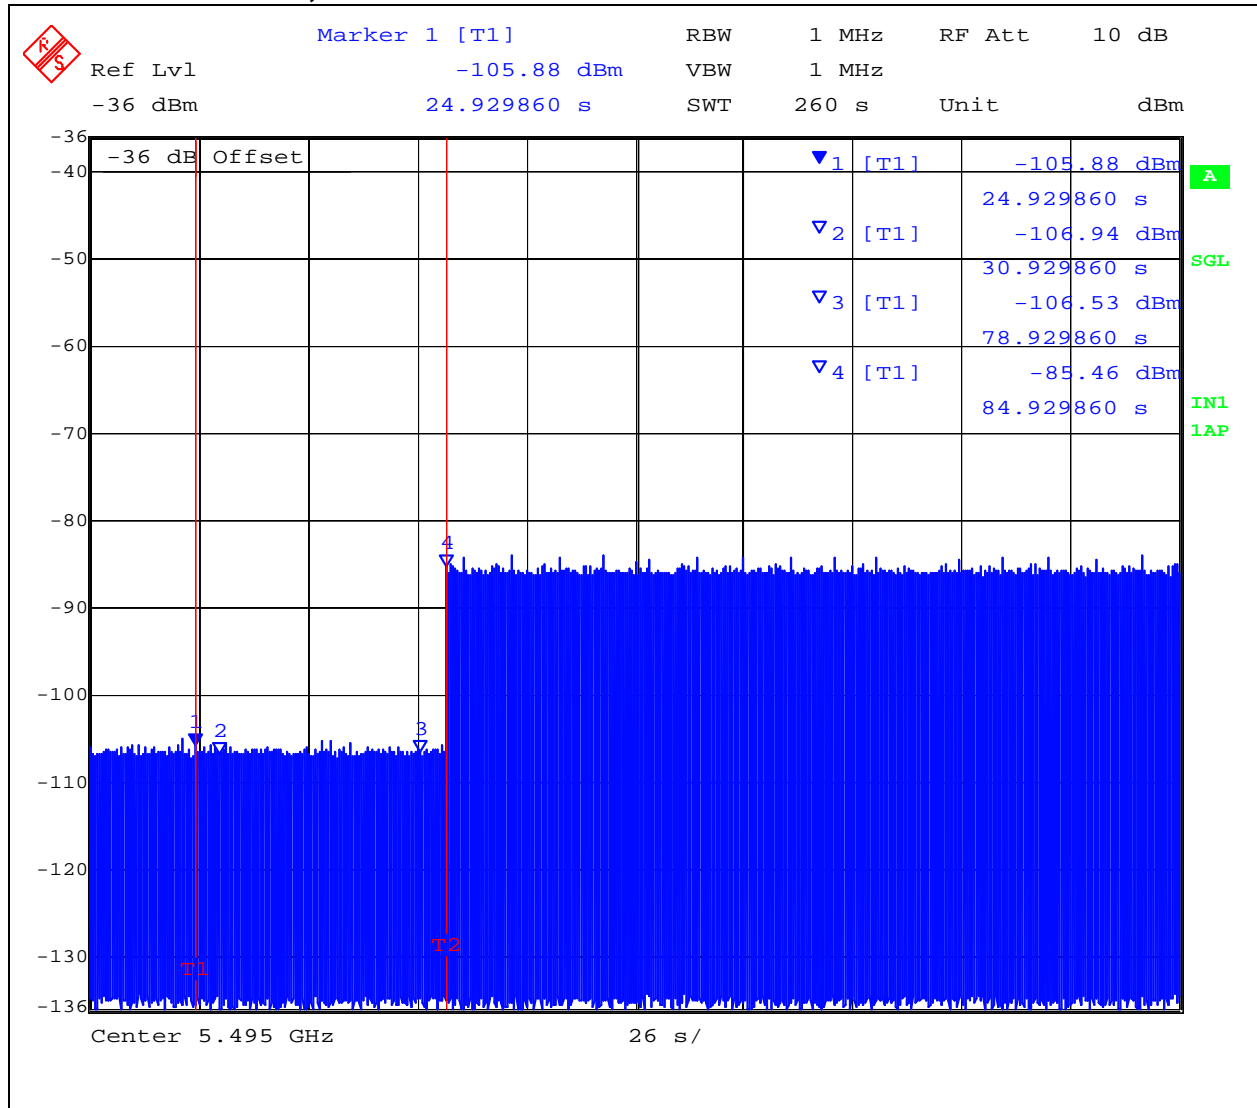


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 141 of 407


**EUT power up and Initial Channel Availability Check Time**  
**5,510MHz 802.11n HT40 Power On = 89.61 Seconds**

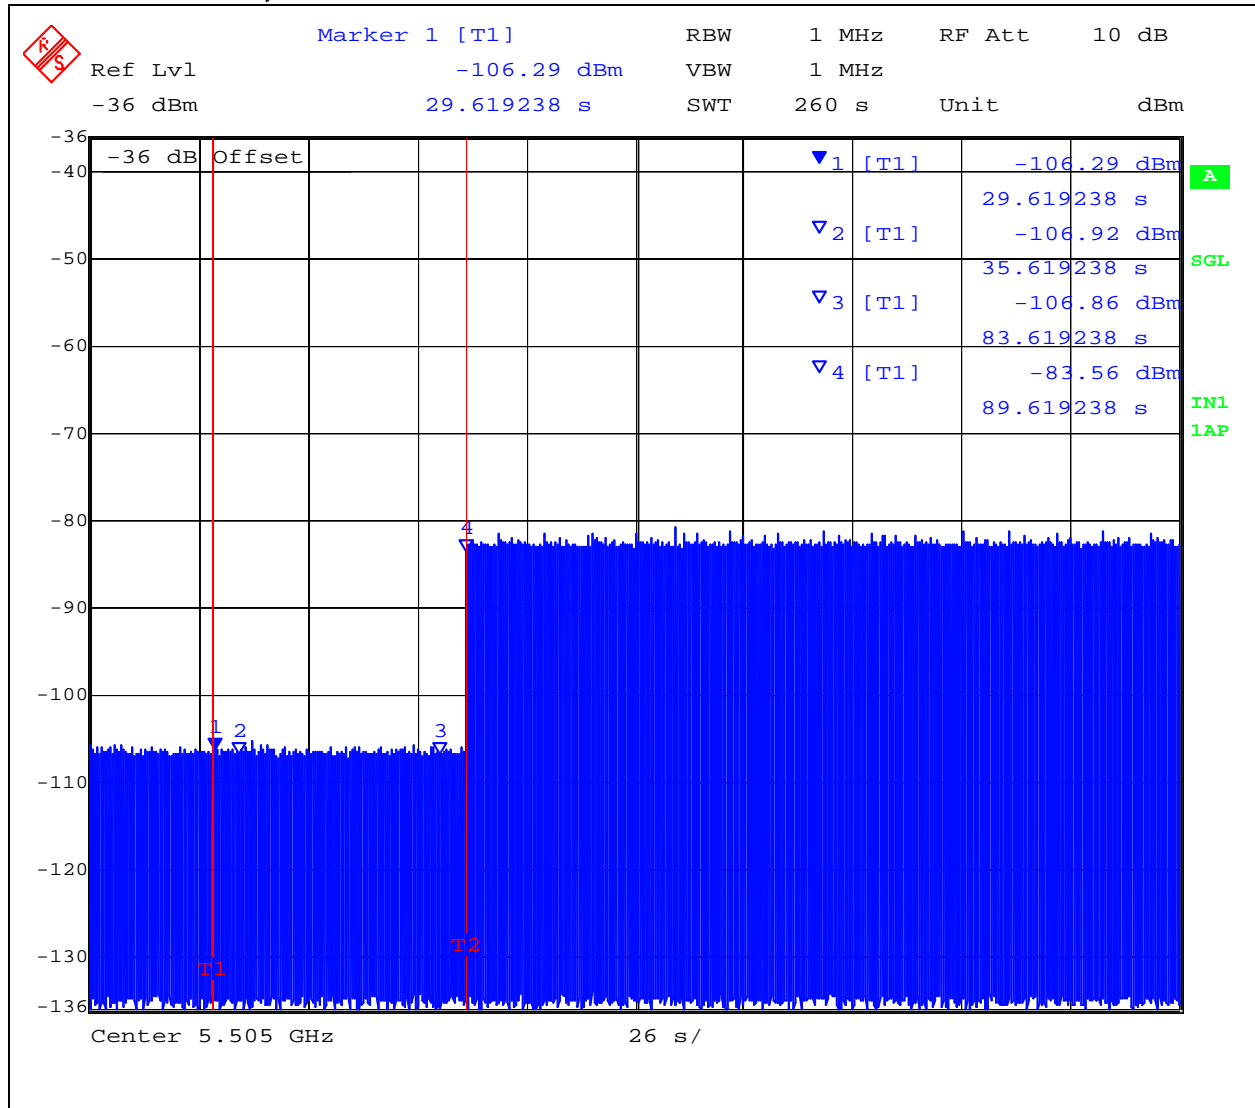

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**EUT power up and Initial Channel Availability Check Time**  
**5,530MHz 802.11AC 80 Power On = 94.30 Seconds**

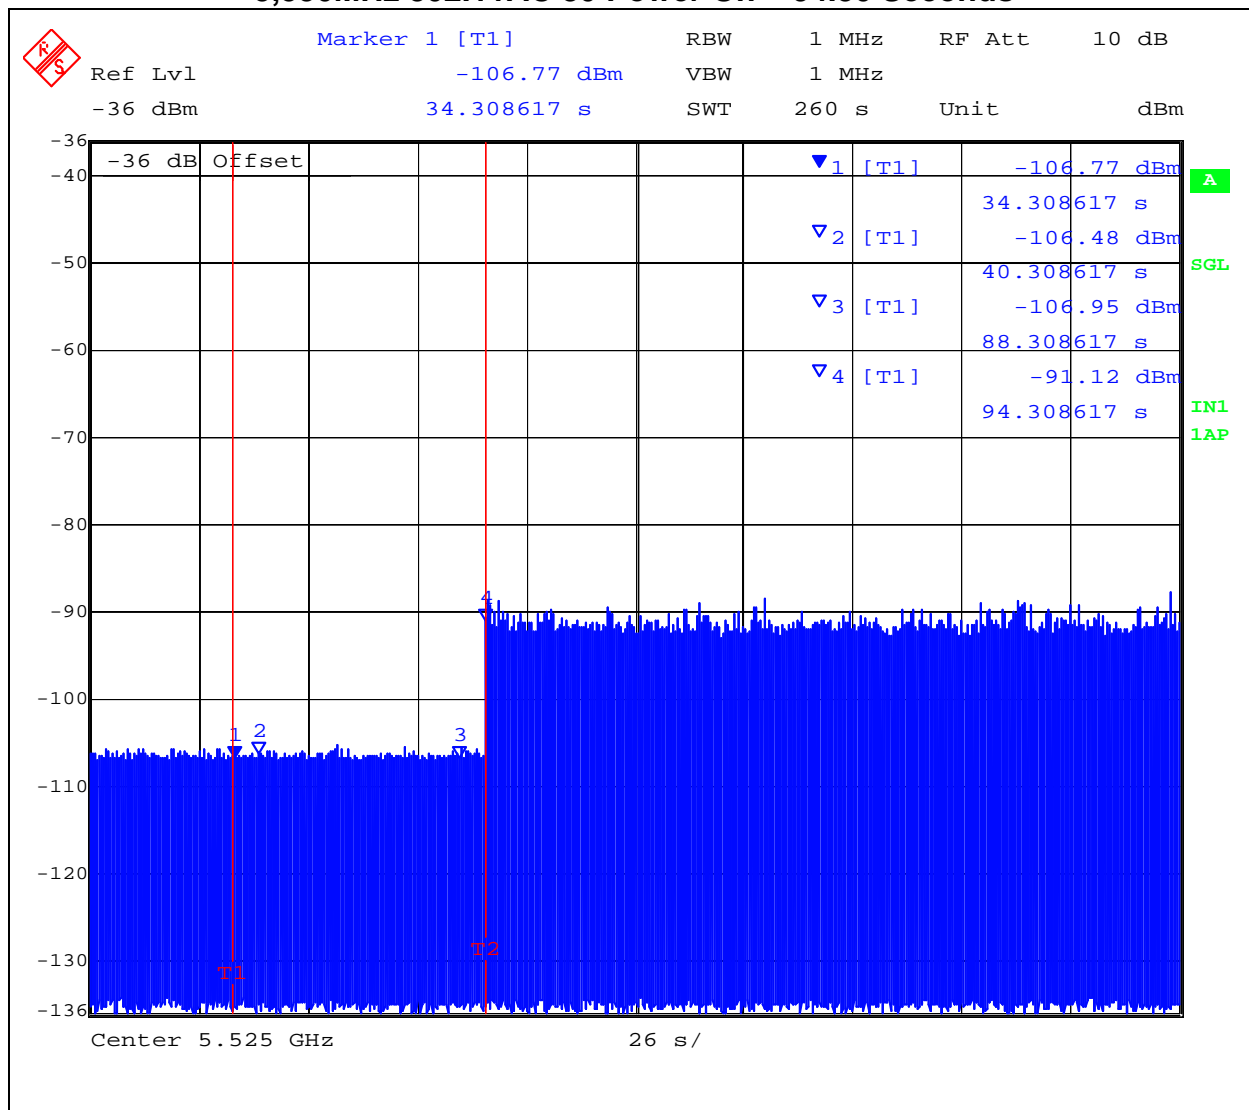

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 143 of 407

---

#### **6.1.4.10. Radar Burst at the Beginning of the Channel Availability Check Time:**

The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold +6 dB (-62 dBm Ref Section 6.1.7) occurs at the beginning of the Channel Availability Check Time.

A single Burst of short pulse of radar Type 1 will commence within a 6 second window starting at  $T_0$  (first red marker line on the following plot).


Visual indication on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions at 5,500MHz 802.11a, 5,510MHz 802.11n HT40, and 802.11AC 80 will continue for 2.5 minutes after the radar burst has been generated.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Channel Availability Check Time at the start T0 + 6 seconds Check Time  
5,500MHz 802.11a**

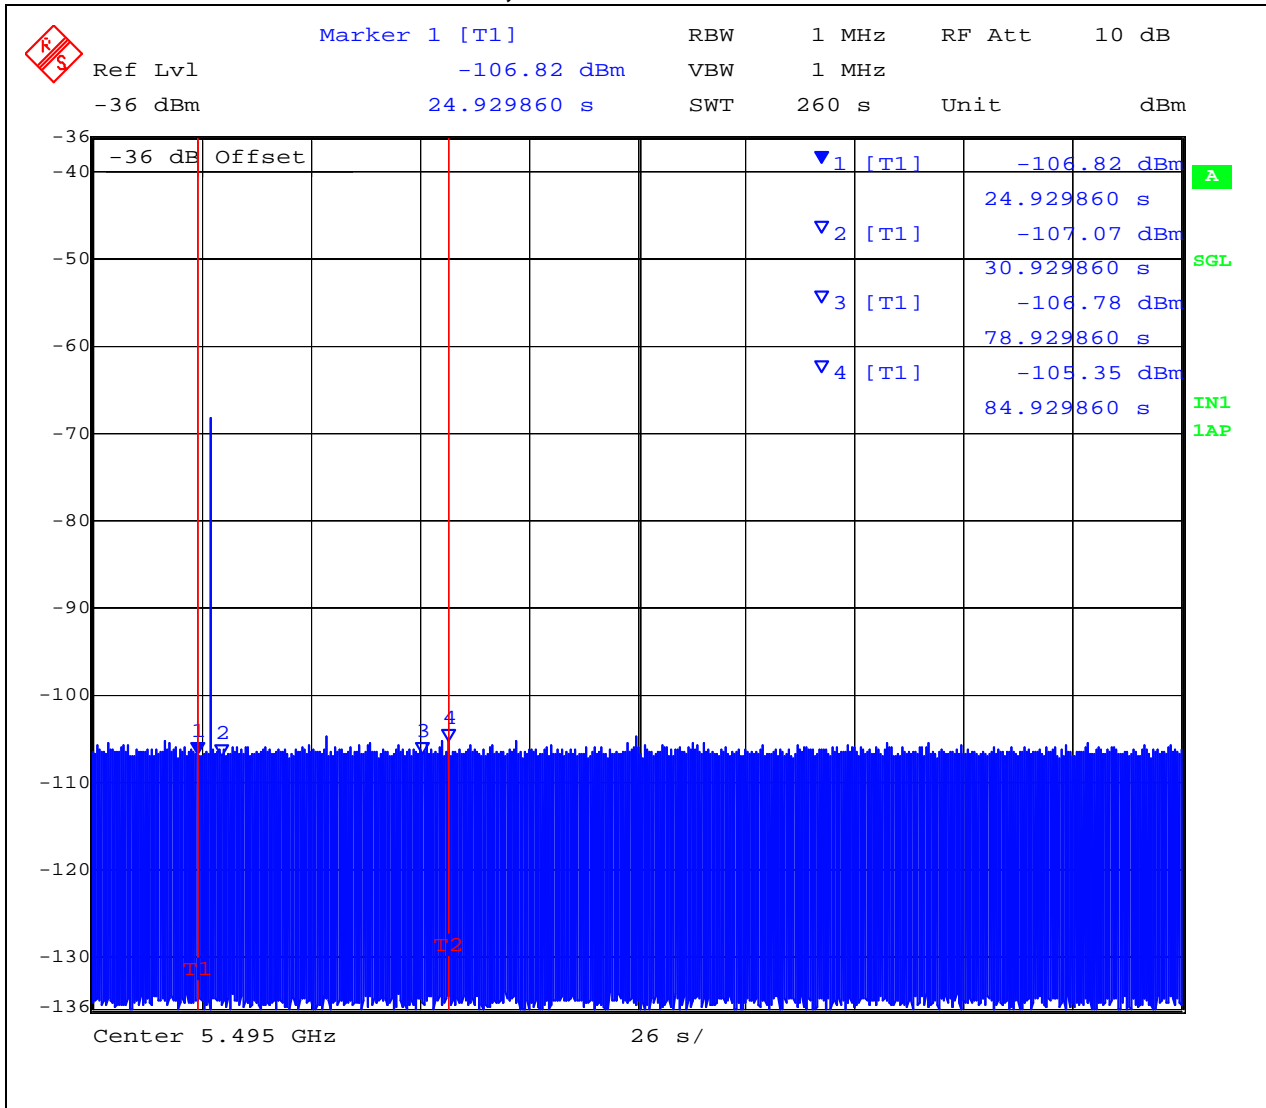

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Channel Availability Check Time at the start T0 + 6 seconds Check Time**  
**5,510MHz 802.11n HT40**

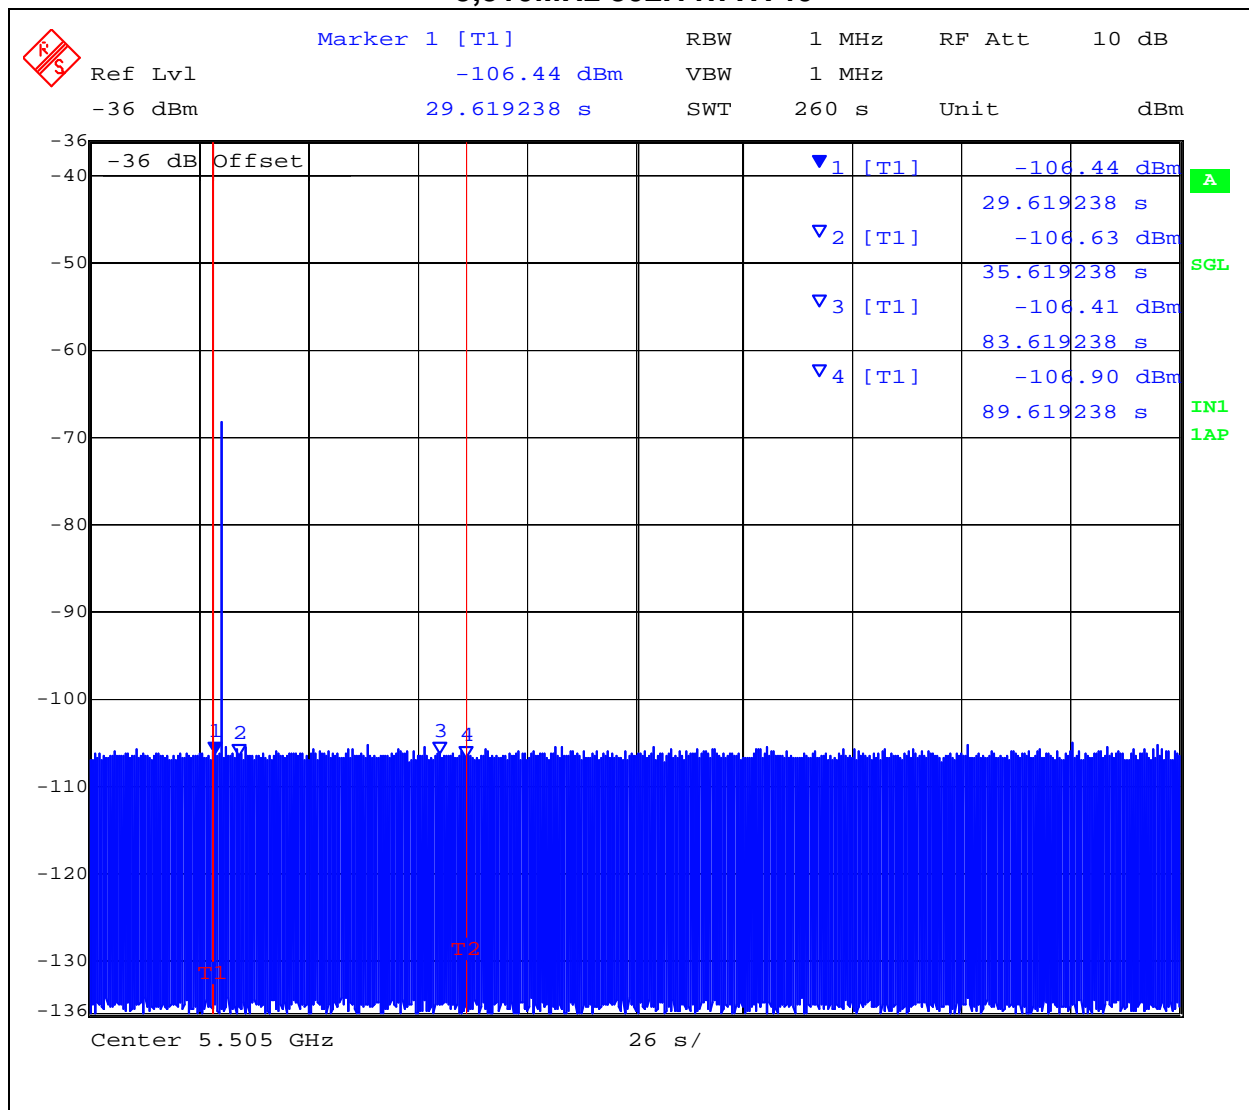

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Channel Availability Check Time at the start T0 + 6 seconds Check Time**  
**5,530MHz 802.11AC 80**

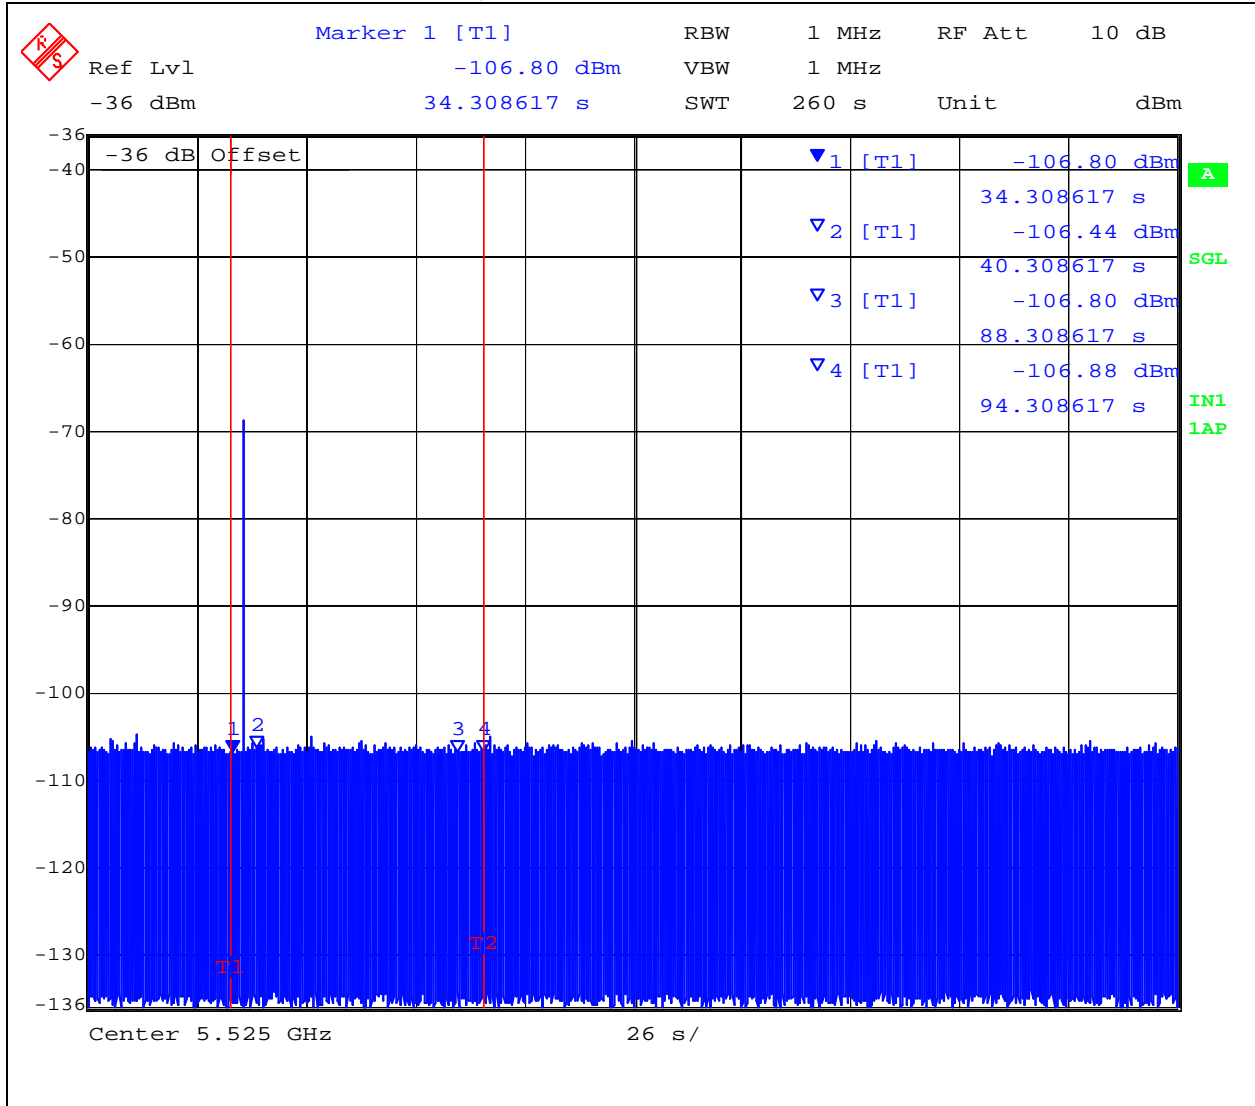

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 147 of 407

---

#### **6.1.4.11. Radar Burst at the End of the Channel Availability Check Time:**

The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold occurs at the end of the Channel Availability Check Time.

A single Burst of short pulse of radar type 1 will commence within a 6 second window starting at  $T_0 + 54$  seconds. The window will commence at marker 2 and end at the red frequency line  $T_2$ .

Visual indication on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions at 5,500MHz 802.11a, 5,510MHz 802.11n HT40, and 802.11AC 80 will continue for 2.5 minutes after the radar burst has been generated.


---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.






**Channel Availability Check Time at T0 + 54 seconds Check Time  
5,500MHz 802.11a**

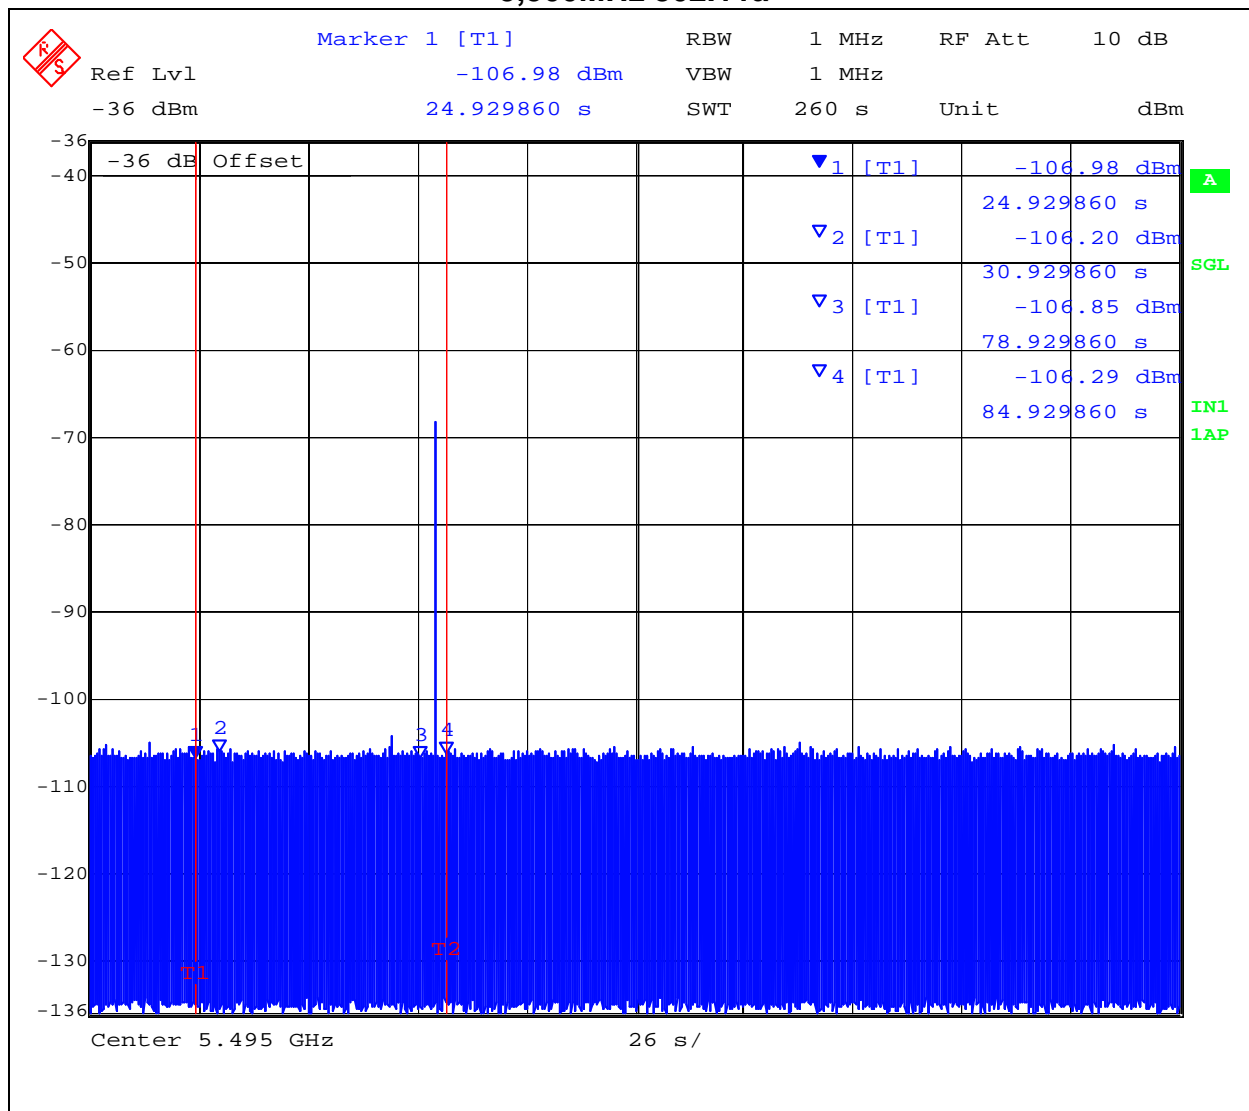

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Channel Availability Check Time at T0 + 54 seconds Check Time  
5,510MHz 802.11n HT40**

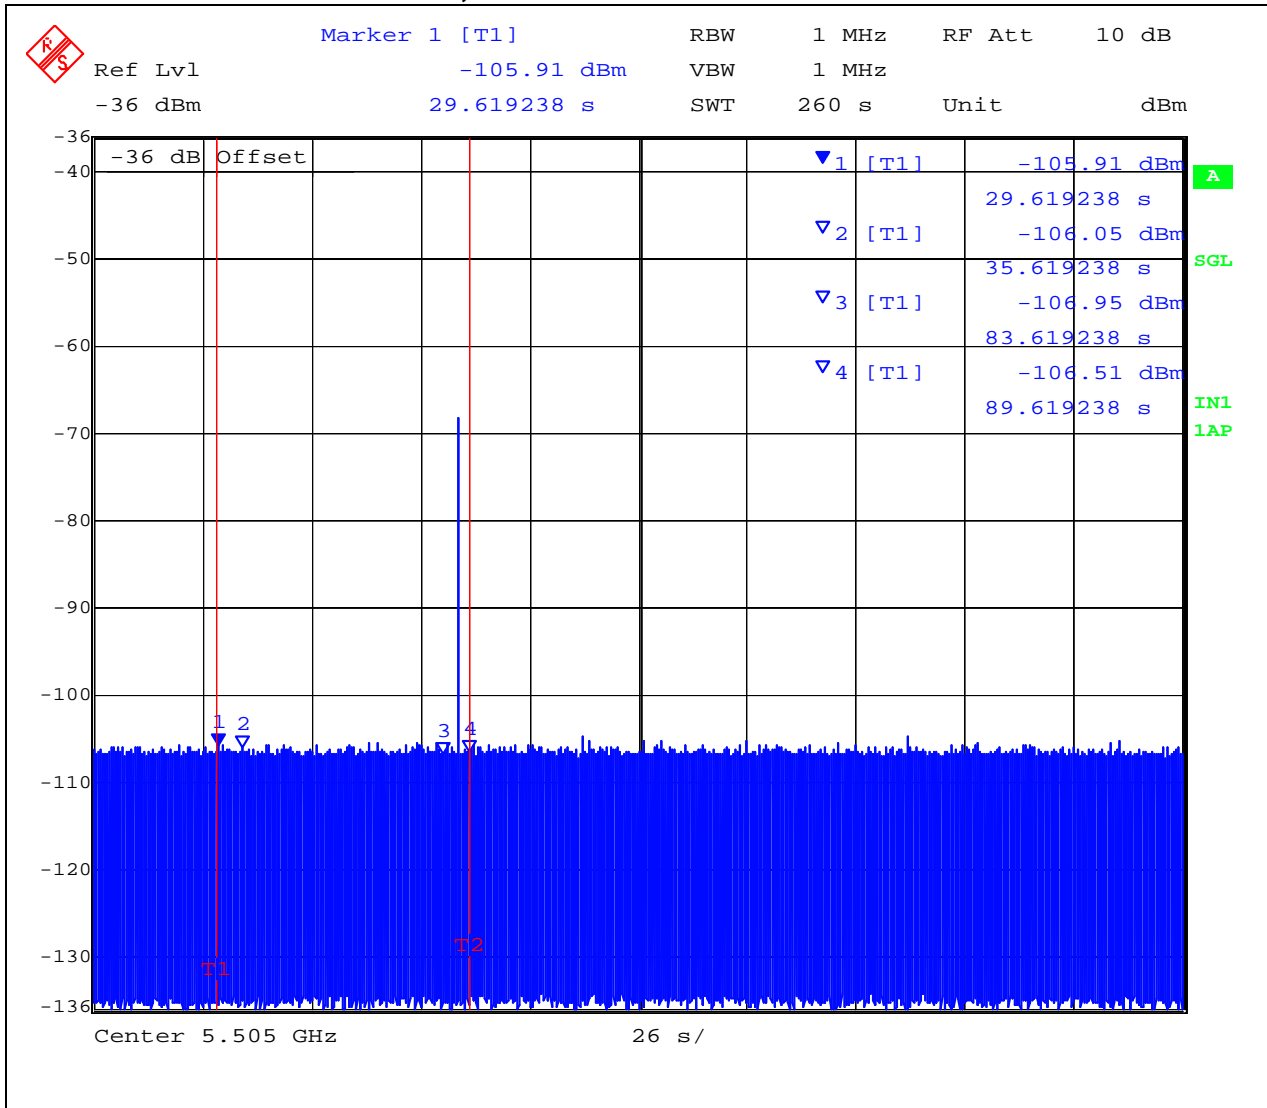

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Channel Availability Check Time at T0 + 54 seconds Check Time  
5,530MHz 802.11AC 80**

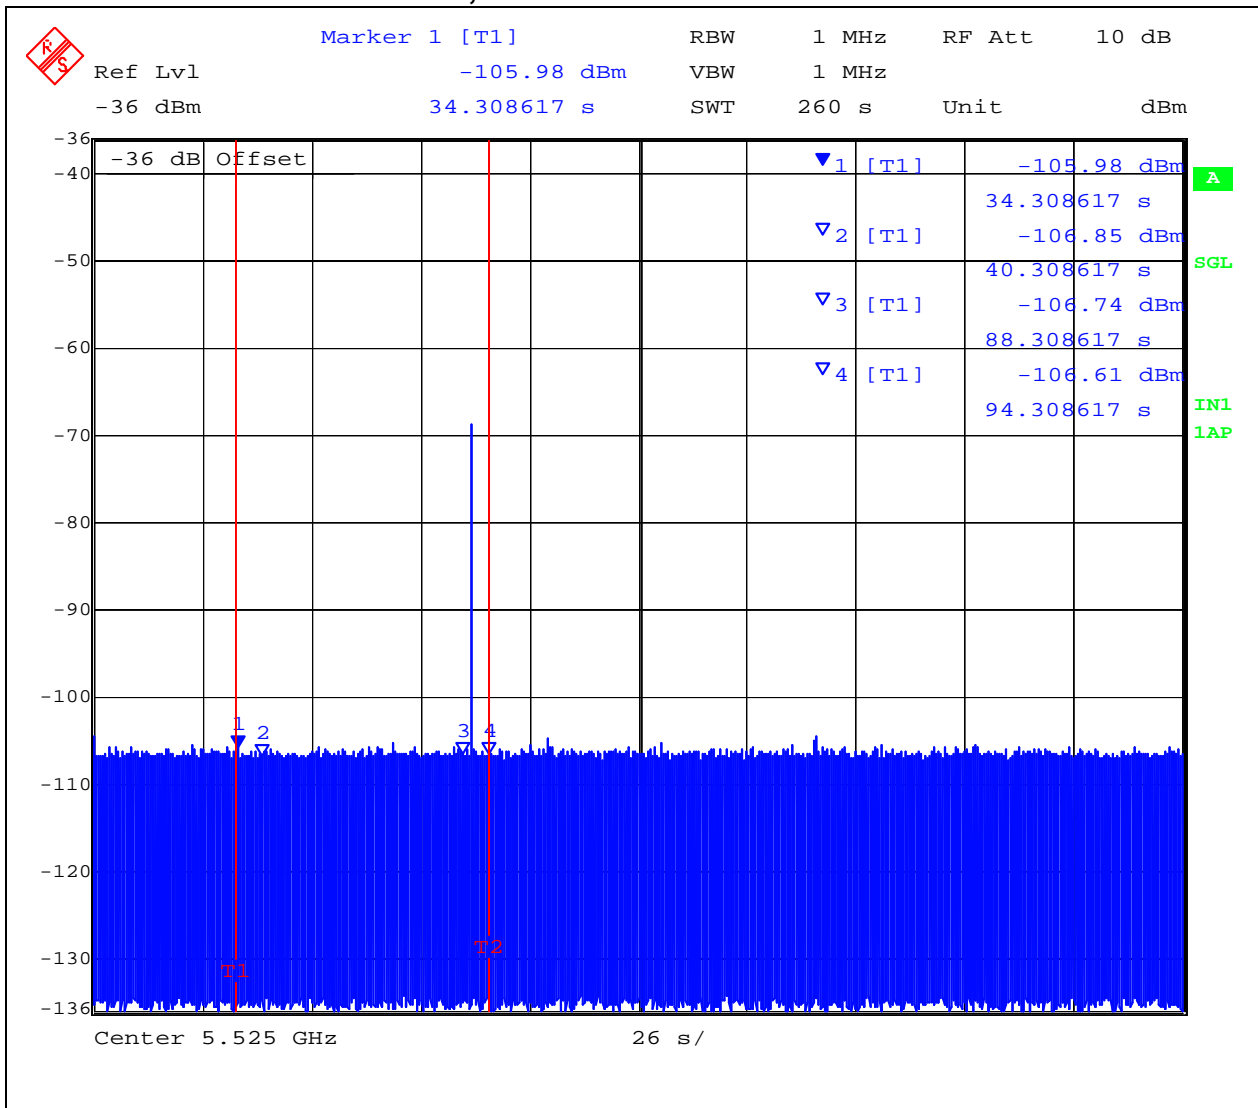

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 151 of 407

---

#### **6.1.4.12. In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period**

##### **FCC §15.407(h)(2)(iii)**

The steps below define the procedure to determine the above mentioned parameters when a radar Burst with a level equal to the DFS Detection Threshold is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the EUT (Master). The requisite MPEG video file ("TestFile.mpg" available on the NTIA website at the following link <http://ntiacsd.ntia.doc.gov/dfs/>) is streamed from the master device (AP) to the client.

#### **Channel Closing Transmission Time - Measurement**

A Type 1 waveform was introduced to the EUT, from which a 12 second transmission record was digitally captured, collecting nearly 250M samples of data, which included in excess of 600 ms of pre-trigger data. This Type 1 waveform had an integral marker built into its construction, marking the start of the radar waveform play, which directly triggered the PXI digitizer's data capture via the PXI backplane trigger bus.

The test system was set-up to capture all transmission data for access point events above a threshold level of -50 dBm. The test equipment time stamps all captured events with respect to  $T_0$  (zero time indicating the start of the measurements sequence) starting the 612.1 ms pre-trigger period followed by the radar type 1 burst period.

Radar (Type 1) Pre-trigger period      612.1 ms

Type 1 burst period                      25.70 ms

(The period of the 18 pulse burst includes [18 pulses \* 1.428mS PRI] = 25.704 ms. Then add 1  $\mu$ s pulse width for the final pulse.)

Channel Closing Transmission Time starts immediately after the last radar pulse is transmitted i.e. 637.8 ms after the start of the trace capture period.




**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 152 of 407

Therefore, pulses seen after this 637.8 ms boundary are identified and totaled to provide an aggregate total of transmissions in order to determine whether the EUT is compliant with the Channel Closing Transmission Time requirements as described in MO&O FCC 06-96. In this case, it was found that an aggregate total of 0.00 ms of transmission time accrued. This value is found at the right hand side at the foot of the following plot (10s Total).

**Channel Closing Transmission Time 5,500 MHz (802.11a) = 0.237 mSecs (limit 260 mSecs)**

**Channel Move Time 5,500MHz (802.11a) = 0.8 Secs (limit 10 Secs)**

### Channel Move Time, Channel Closing Transmission Time for Type 1 Radar Captured by the Test System - 0 to 12 seconds

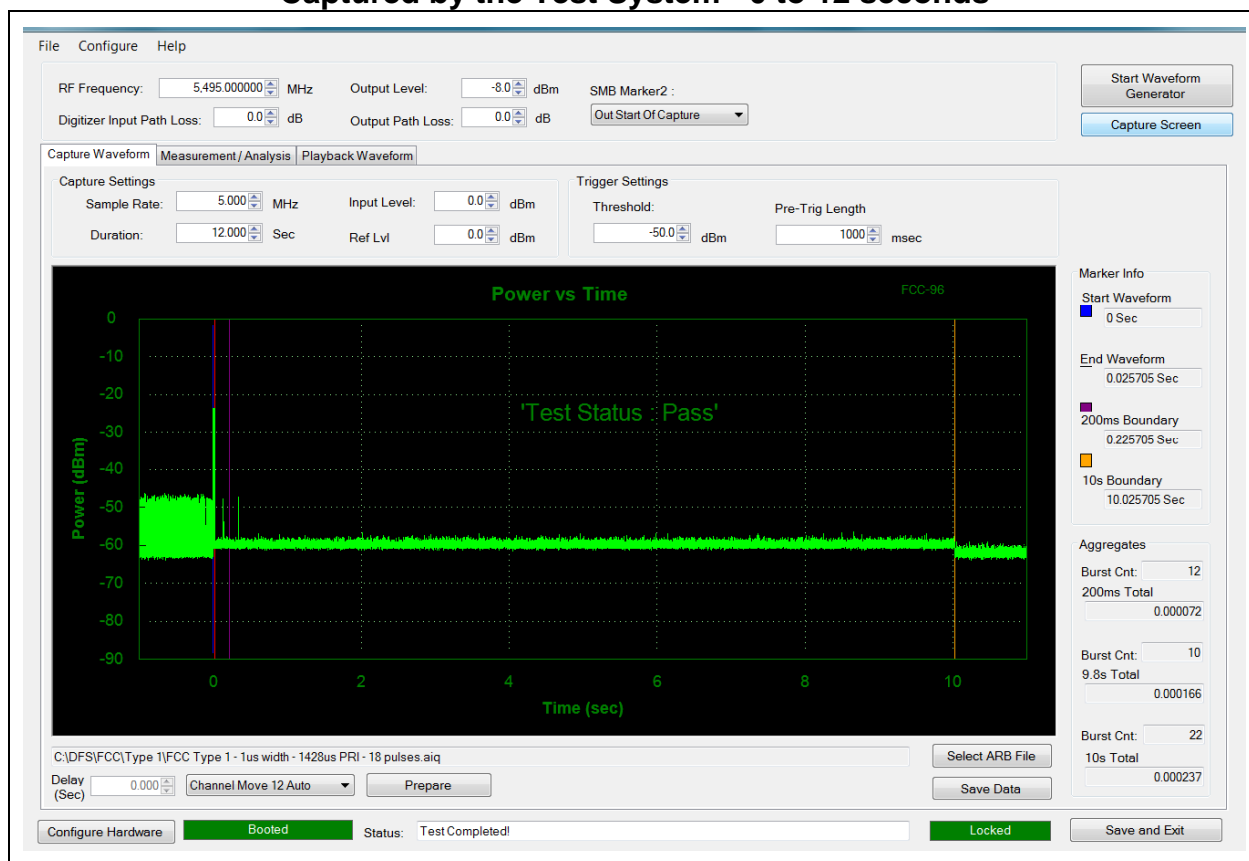

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 153 of 407

**Channel Closing Transmission Time 5,510 MHz (802.11n HT40) = 1.061 mSecs**  
**(limit 260 mSecs)**

**Channel Move Time 5,510 MHz (802.11n HT40) = 1.12 Secs** (limit 10 Secs)

### Channel Move Time, Channel Closing Transmission Time for Type 1 Radar Captured by the Test System - 0 to 12 seconds



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 154 of 407

**Channel Closing Transmission Time 5,530 MHz (802.11AC 80) = 0.001 uSecs**  
**(limit 260 mSecs)**

**Channel Move Time 5,530 MHz (802.11AC 80) = 0.00001 Secs** (limit 10 Secs)

### Channel Move Time, Channel Closing Transmission Time for Type 1 Radar Captured by the Test System - 0 to 12 seconds

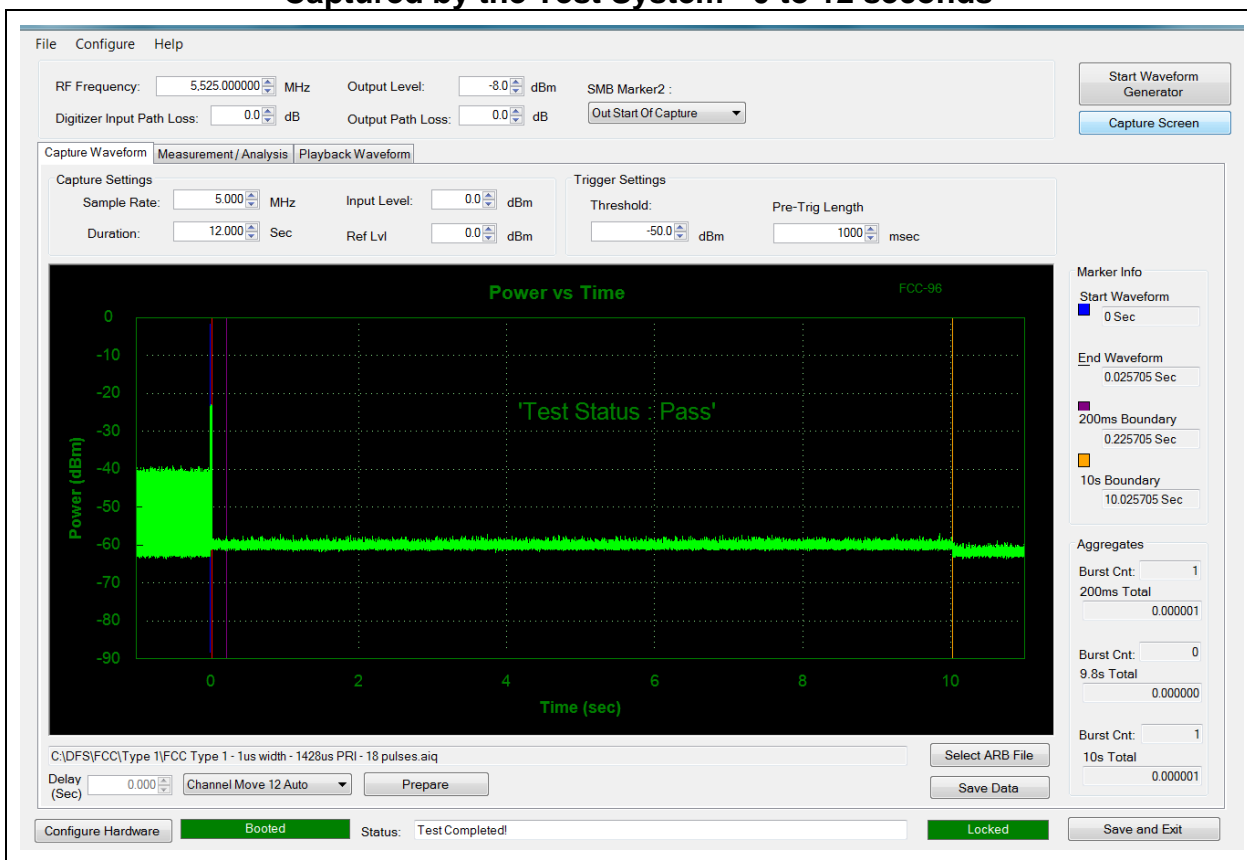

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




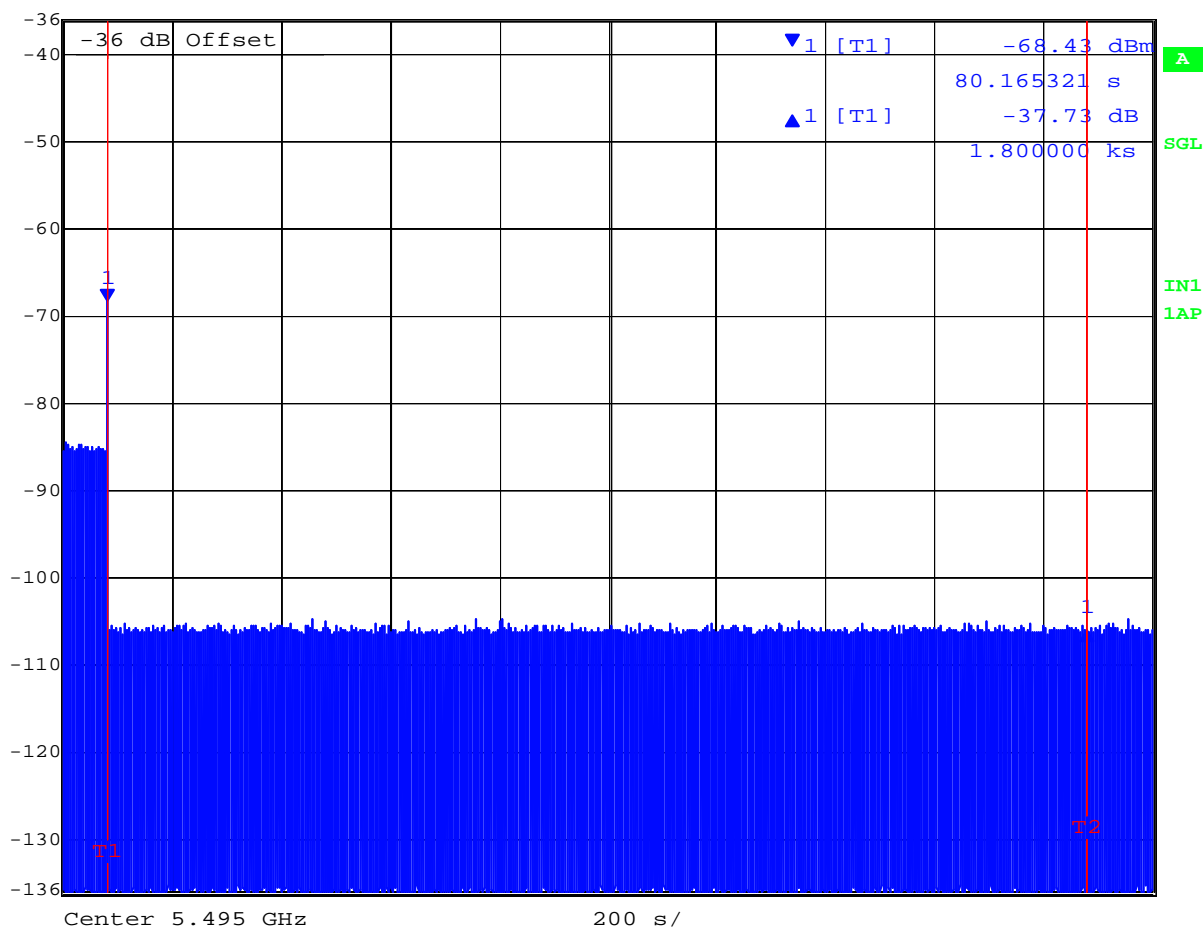
**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 155 of 407

### 30 Minute Non-Occupancy Period

The EUT is monitored for more than 30 minutes following the channel close/move time to verify no transmissions resume on this Channel.

### 30 Minute Non-Occupancy Period Type 1 Radar 5,500MHz 802.11a

 Delta 1 [T1] RBW 1 MHz RF Att 10 dB  
Ref Lvl -37.73 dB VBW 1 MHz  
-36 dBm 1.800000 ks SWT 2000 s Unit dBm



Date: 5.AUG.2013 18:49:02


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.






**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 156 of 407

### 30 Minute Non-Occupancy Period Type 1 Radar 5,510 MHz 802.11n HT40

 Ref Lvl      Delta 1 [T1]      RBW      1 MHz      RF Att      10 dB  
-36 dBm      -37.72 dB      VBW      1 MHz  
1.800000 ks      SWT      2000 s      Unit      dBm

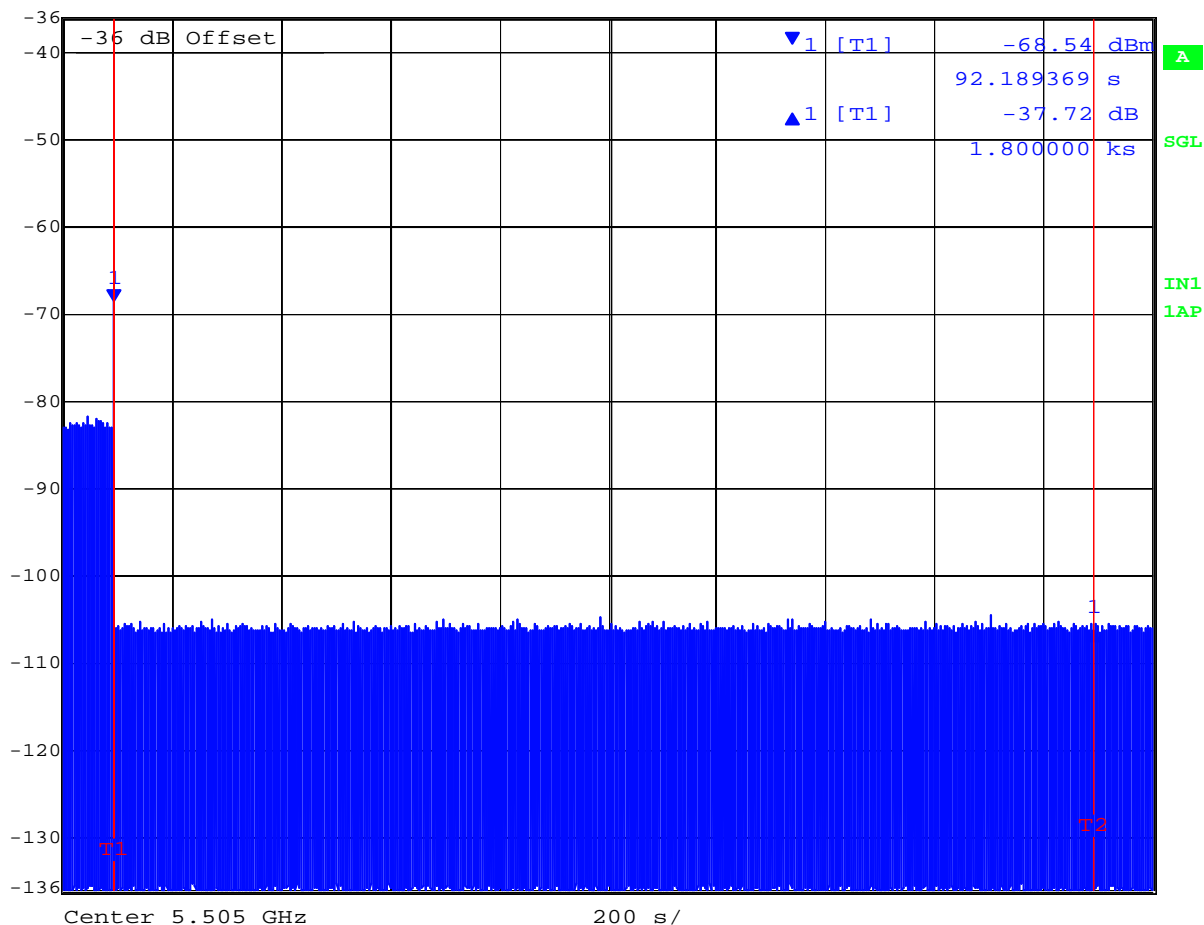

Date: 5.AUG.2013 18:05:59


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 157 of 407

**30 Minute Non-Occupancy Period Type 1 Radar**  
**5,530 MHz 802.11AC 80**

	Delta 1 [T1]	RBW	1 MHz	RF Att	10 dB
	Ref Lvl	-37.35 dB	VBW	1 MHz	
	-36 dBm	1.800000 ks	SWT	2000 s	Unit

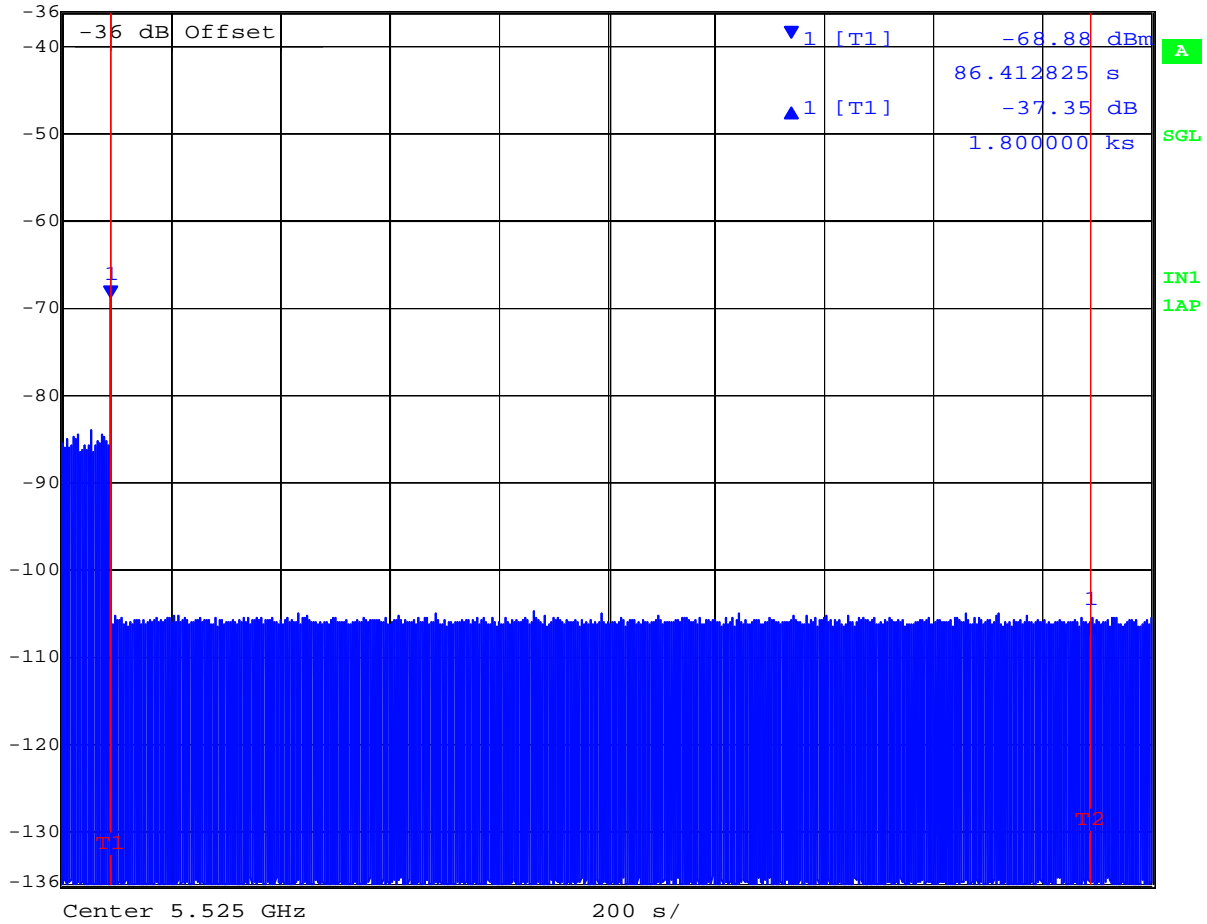

Date: 8.AUG.2013 08:03:43

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 158 of 407

---

#### **6.1.4.13. Statistical Performance Check**

The steps below define the procedure to determine the minimum percentage of detection when a radar burst with a level equal to the DFS Detection Threshold is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the UUT (Master) at 5,500MHz 802.11a, 5,510MHz 802.11n HT40, and 802.11AC 80.

The Radar Waveform generator sends the individual waveform for each of the radar types 1-6. Statistical data will be gathered to determine the ability of the device to detect the radar test waveforms. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trial runs. The percentage of successful detection is calculated by:

Total # of detections ÷ Total # of Trials × 100 = Probability of Detection

The Minimum number of trails, minimum percentage of successful detection and the average minimum percentage of successful detection are found in the Radar Test Waveforms section.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Verification of Detection 5,500MHz 802.11a**

Trial #	Detection = √, No Detection = 0					
	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	√	√	√	√	√	√
2	√	√	√	√	√	√
3	√	√	√	√	√	√
4	√	√	√	√	√	√
5	√	√	√	√	√	√
6	√	√	√	√	√	√
7	√	√	√	√	√	√
8	√	√	√	√	√	√
9	√	√	√	√	√	√
10	√	√	√	√	√	√
11	√	√	√	√	√	√
12	√	√	√	√	√	√
13	√	√	√	√	√	√
14	√	√	√	√	√	√
15	√	√	√	√	√	√
16	√	√	√	√	√	√
17	√	√	√	√	√	√
18	√	√	√	√	√	√
19	√	√	√	√	√	√
20	√	√	√	√	√	√
21	√	√	√	0	√	√
22	√	√	√	0	√	√
23	√	√	√	√	√	√
24	√	√	√	√	√	√
25	√	√	√	√	0	√
26	√	√	√	√	√	√
27	√	√	√	√	√	√
28	√	√	√	√	√	√
29	√	√	√	√	√	√
30	√	√	√	√	√	√
<b>Detection Percentage</b>	100% (>60%)	100% (>60%)	100% (>60%)	93.3% (>60%)	96.6% (>80%)	100% (>70%)

In addition an average minimum percentage of successful detection across all four Short pulse radar test waveforms is required and calculated as follows;

$$(P_{d1} + P_{d2} + P_{d3} + P_{d4}) / 4 = \% + \% + \% + \% / 4 = \% (> 80\%)$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Verification of Detection 5,510MHz 802.11n HT40**

Trial #	Detection = √, No Detection = 0					
	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	√	√	√	√	√	√
2	√	√	√	√	√	√
3	√	√	√	√	√	√
4	√	√	√	√	√	√
5	√	√	√	√	√	√
6	√	√	√	√	√	√
7	√	√	√	√	√	√
8	√	√	√	√	√	√
9	√	√	√	√	√	√
10	√	√	√	√	√	√
11	√	√	√	√	√	√
12	√	√	√	√	√	√
13	√	√	√	√	√	√
14	√	√	√	√	√	√
15	√	√	√	√	√	√
16	√	√	√	√	√	√
17	√	√	√	√	√	√
18	√	√	√	√	√	√
19	√	√	√	√	√	√
20	√	√	√	√	√	√
21	√	√	√	√	√	√
22	√	√	√	√	√	√
23	√	√	√	√	√	√
24	√	√	√	√	√	√
25	√	√	√	√	√	√
26	√	√	√	√	√	√
27	√	√	√	√	√	√
28	√	√	√	√	√	√
29	√	√	√	√	√	√
30	√	√	√	√	√	√
<b>Detection Percentage</b>	100% (>60%)	100% (>60%)	100% (>60%)	100% (>60%)	100% (>80%)	100% (>70%)

In addition an average minimum percentage of successful detection across all four Short pulse radar test waveforms is required and calculated as follows;

$$(P_{d1} + P_{d2} + P_{d3} + P_{d4}) / 4 = (\% + \% + \% + \%) / 4 = \% (> 80\%)$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Verification of Detection 5,530MHz 802.11n HT80**

Trial #	Detection = √, No Detection = 0					
	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	√	√	√	√	√	√
2	√	√	√	√	√	√
3	√	√	√	√	√	√
4	√	√	√	√	√	√
5	√	√	√	√	√	√
6	√	√	√	√	√	√
7	√	√	√	√	√	√
8	√	√	√	√	√	√
9	√	√	√	√	√	√
10	√	√	√	√	√	√
11	√	√	0	√	√	√
12	√	√	√	√	√	√
13	√	√	√	√	√	√
14	√	√	√	√	√	√
15	√	√	√	√	√	√
16	√	√	√	√	√	√
17	√	√	√	√	√	√
18	√	√	√	√	√	√
19	0	√	√	√	√	√
20	√	√	√	√	√	√
21	√	√	√	√	√	√
22	√	√	√	√	√	√
23	√	√	√	√	√	√
24	√	√	√	√	√	√
25	√	√	√	√	√	√
26	√	√	√	√	√	√
27	√	√	√	√	√	√
28	√	√	√	√	√	√
29	√	√	√	√	√	√
30	√	√	√	√	√	√
<b>Detection Percentage</b>	100% (>60%)	100% (>60%)	96.6% (>60%)	100% (>60%)	100% (>80%)	100% (>70%)

In addition an average minimum percentage of successful detection across all four Short pulse radar test waveforms is required and calculated as follows;

$$(P_{d1} + P_{d2} + P_{d3} + P_{d4}) / 4 = (\% + \% + \% + \%) / 4 = \% (> 80\%)$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 162 of 407

---

**Measurement Uncertainty Time/Power**

Measurement uncertainty		
- Time		4%
- Power		1.33dB

**Traceability**


Test Equipment Used
0072, 0083, 0098, 0116, 0132, 0158, 0313, 0314, 0193, 0223, 0252, 0253, 0251, 0256, 0328, 0329

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## 7. PHOTOGRAPHS

### 7.1. Test Setup - Conducted

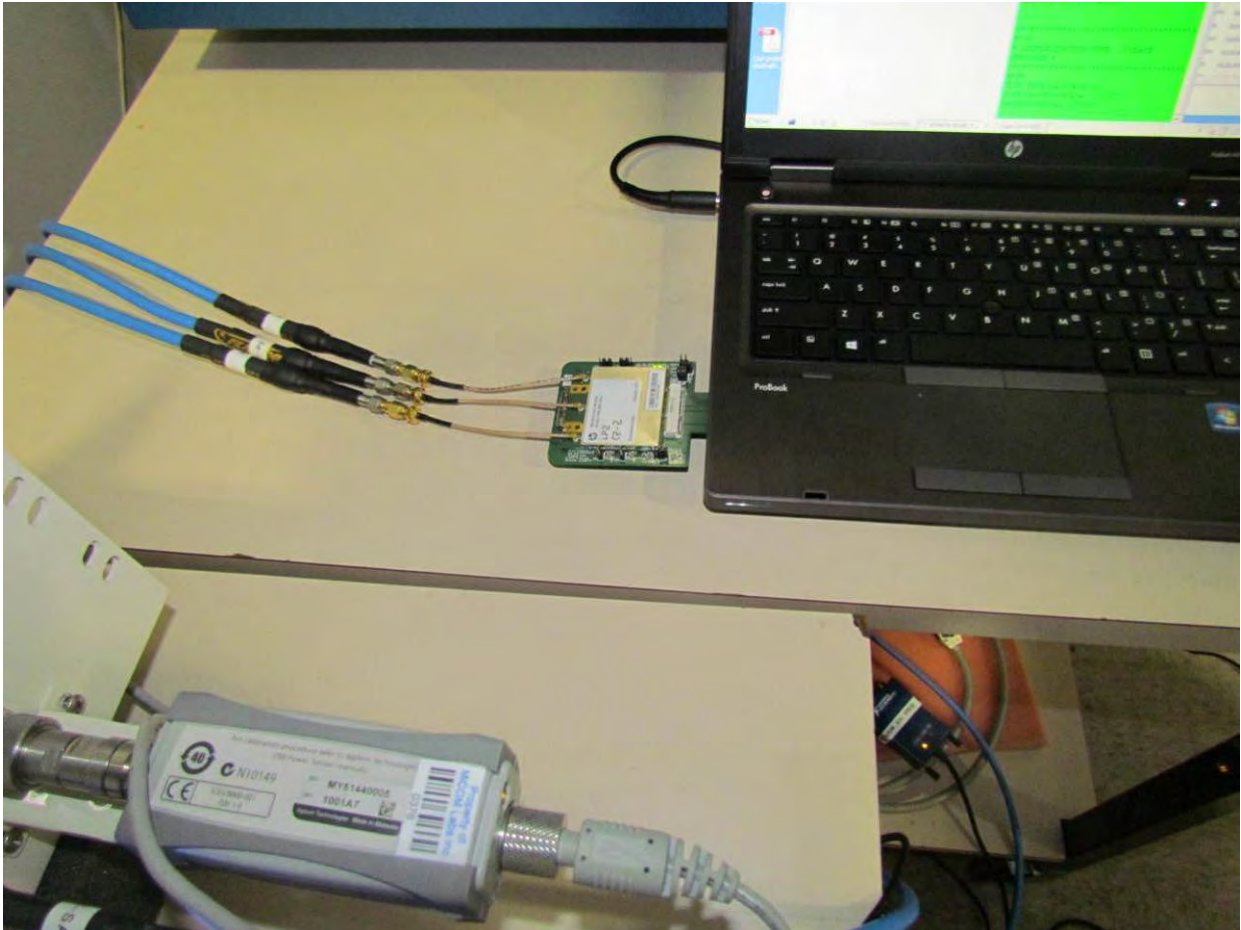

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## 7.2. Test Setup - Digital and Spurious Emissions Configuration



---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### 7.3. Dynamic Frequency Selection (DFS)



---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 166 of 407

## 8. TEST EQUIPMENT DETAILS

Asset #	Instrument	Manufacturer	Part #	Serial #	Calibration Due Date
0070	Power Meter	Hewlett Packard	437B	3125U11552	28 <sup>th</sup> Nov 13
0117	Power Sensor	Hewlett Packard	8487D	3318A00371	15 <sup>th</sup> Nov 13
0223	Power Meter	Hewlett Packard	EPM-442A	US37480256	15 <sup>th</sup> Nov 13
0374	Power Sensor	Hewlett Packard	8485A	3318A19694	29 <sup>th</sup> Nov 13
0158	Barometer /Thermometer	Control Co.	4196	E2846	8 <sup>th</sup> Dec 13
0193	EMI Receiver	Rhode & Schwartz	ESI 7	838496/007	2 <sup>nd</sup> Dec 13
0287	EMI Receiver	Rhode & Schwartz	ESIB40	100201	16 <sup>th</sup> Nov 13
0338	30 - 3000 MHz Antenna	Sunol	JB3	A052907	8 <sup>th</sup> Nov 13
0335	1-18 GHz Horn Antenna	EMCO	3117	00066580	7 <sup>th</sup> Nov 13
0252	SMA Cable	Megaphase	Sucoflex 104	None	N/A
0293	BNC Cable	Megaphase	1689 1GVT4	15F50B001	N/A
0307	BNC Cable	Megaphase	1689 1GVT4	15F50B002	N/A
0310	2m SMA Cable	Micro-Coax	UFA210A-0-0787-3G03G0	209089-001	N/A
0312	3m SMA Cable	Micro-Coax	UFA210A-1-1181-3G0300	209092-001	N/A
0314	30dB N-Type Attenuator	ARRA	N9444-30	1623	N/A
	EMC Test Software	EMISoft	Vasona	5.0051	N/A
	RF Conducted Test Software	National Instruments	Labview	Version 8.2	N/A
	RF Conducted Test Software	MiCOM Labs ATS		Version 1.5	N/A

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 167 of 407

---

## **APPENDIX**

### **A. SUPPORTING INFORMATION**

#### **A.1. CONDUCTED TEST PLOTS**

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




### A.1.1. 26 dB & 99% Bandwidth



#### 26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5180.00 MHz, Chain a, Temp: Ambient, Voltage: 5 Vdc

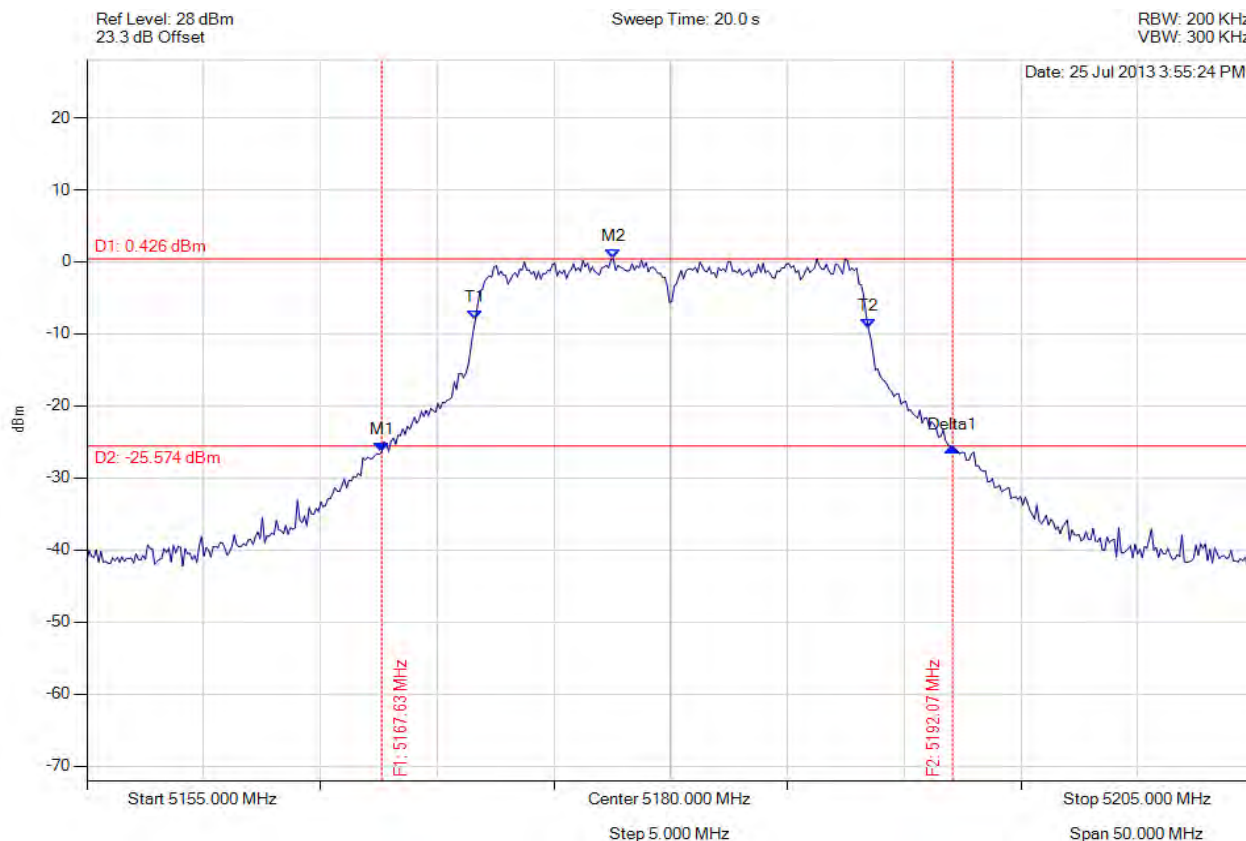

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5167.625 MHz : -26.427 dBm M2 : 5177.545 MHz : 0.426 dBm Delta1 : 24.449 MHz : 0.759 dB T1 : 5171.633 MHz : -8.083 dBm T2 : 5188.467 MHz : -9.222 dBm OBW : 16.834 MHz	Measured 26 dB Bandwidth : 24.449 MHz Measured 99% Bandwidth : 16.834 MHz

[Back to the Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**26 dB & 99% BANDWIDTH**

Variant: 802.11a, Channel: 5180.00 MHz, Chain b, Temp: Ambient, Voltage: 5 Vdc

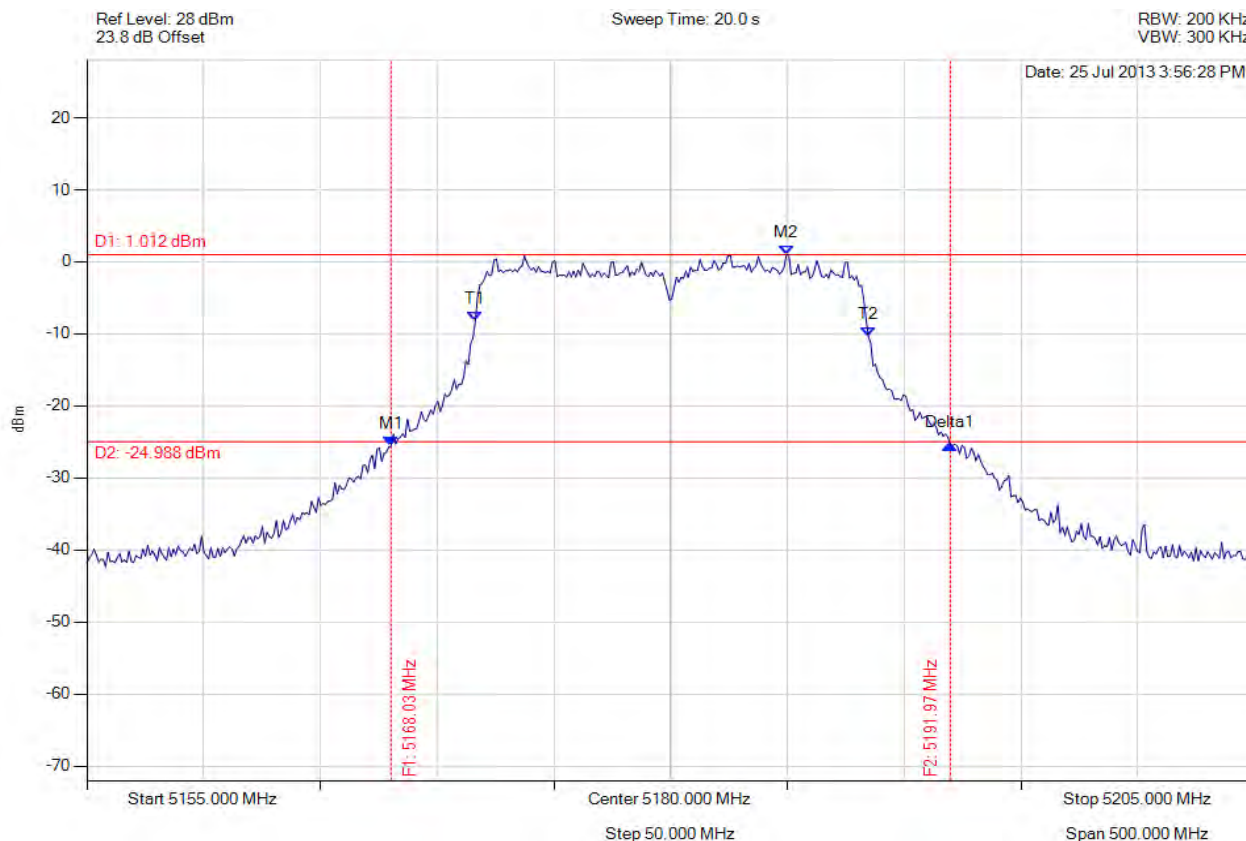

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5168.026 MHz : -25.603 dBm M2 : 5184.960 MHz : 1.012 dBm Delta1 : 23.948 MHz : 0.169 dB T1 : 5171.633 MHz : -8.203 dBm T2 : 5188.467 MHz : -10.363 dBm OBW : 16.834 MHz	Measured 26 dB Bandwidth: 23.948 MHz Measured 99% Bandwidth: 16.834 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 170 of 407



**26 dB & 99% BANDWIDTH**

Variant: 802.11a, Channel: 5180.00 MHz, Chain c, Temp: Ambient, Voltage: 5 Vdc

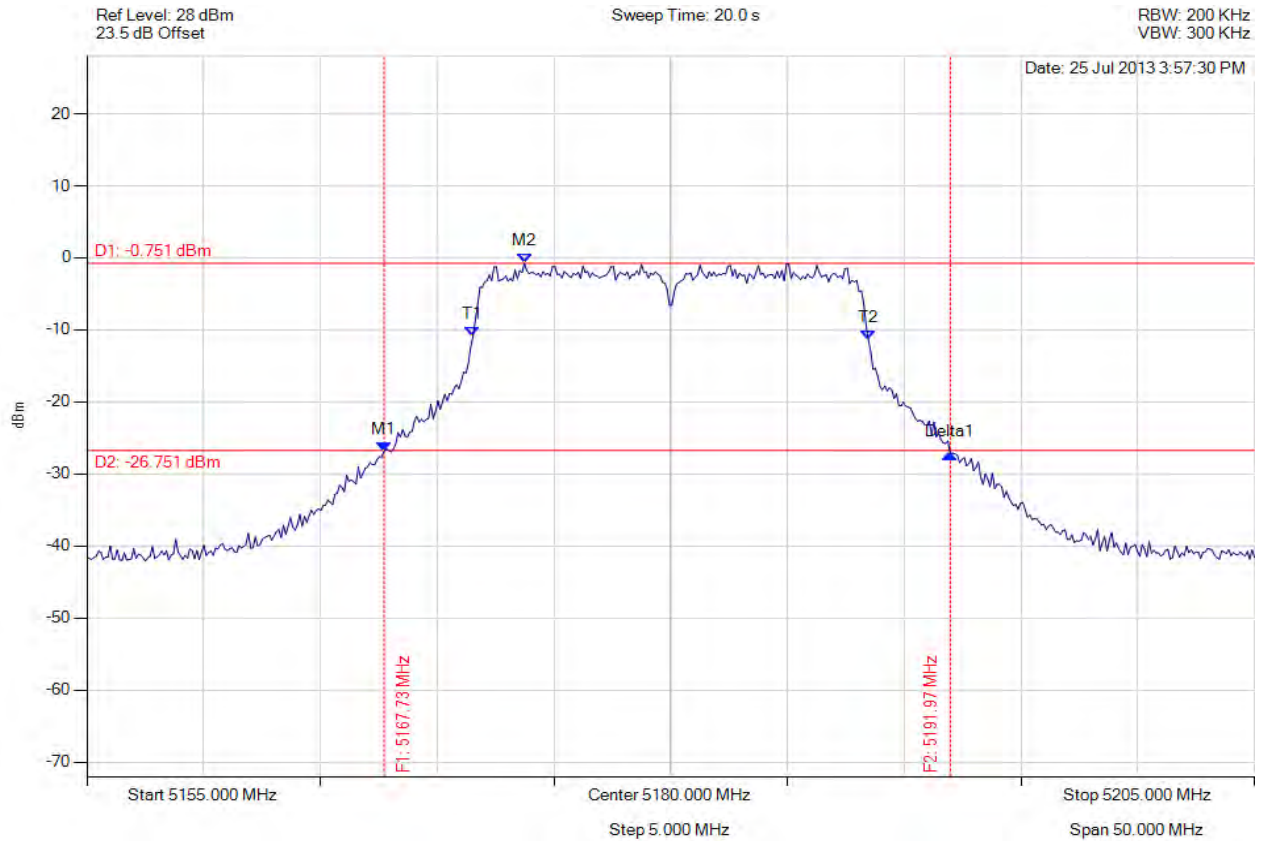

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5167.725 MHz : -26.836 dBm M2 : 5173.737 MHz : -0.751 dBm Delta1 : 24.248 MHz : -0.329 dB T1 : 5171.533 MHz : -10.928 dBm T2 : 5188.467 MHz : -11.396 dBm OBW : 16.934 MHz	Measured 26 dB Bandwidth: 24.248 MHz Measured 99% Bandwidth: 16.934 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11a, Channel: 5200.00 MHz, Chain a, Temp: Ambient, Voltage: 5 Vdc

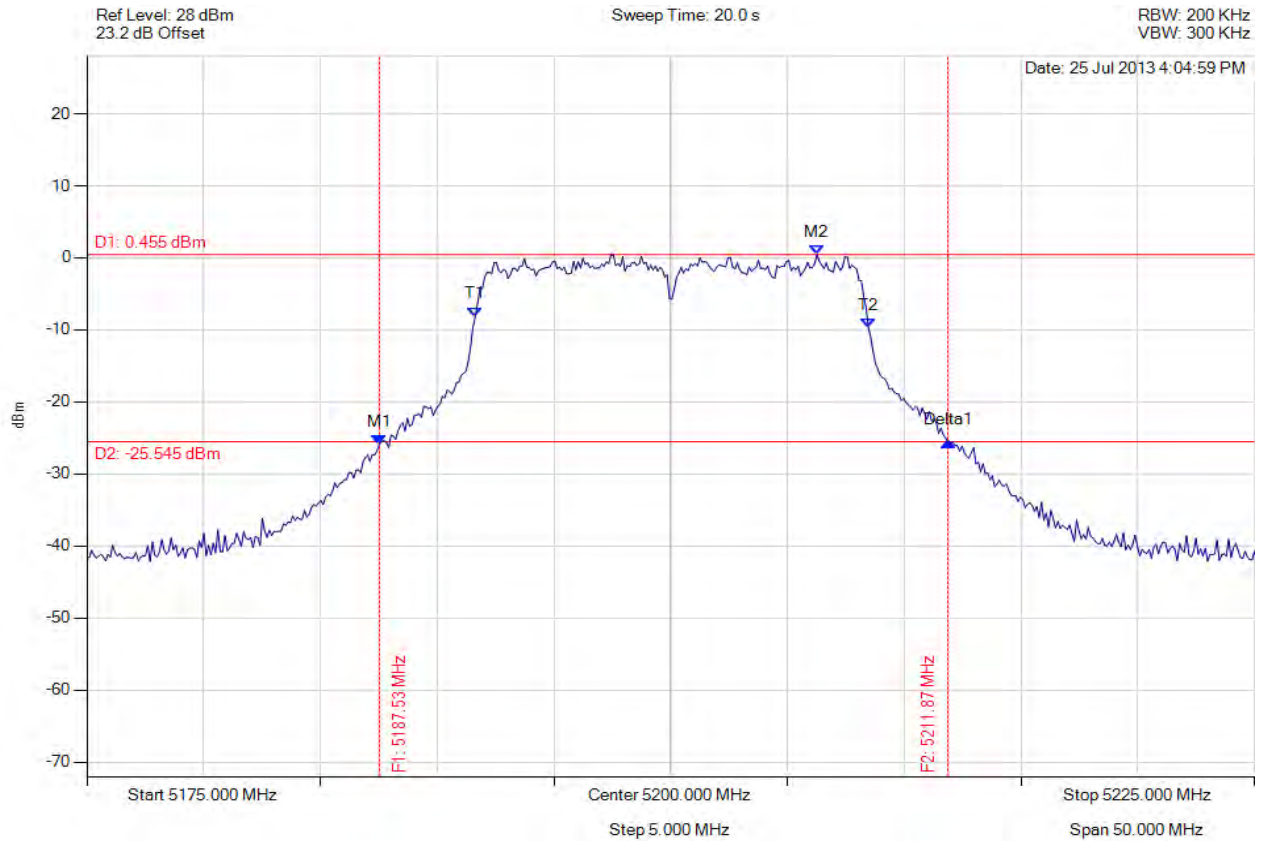

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5187.525 MHz : -25.919 dBm M2 : 5206.263 MHz : 0.455 dBm Delta1 : 24.349 MHz : 0.323 dB T1 : 5191.633 MHz : -8.125 dBm T2 : 5208.467 MHz : -9.641 dBm OBW : 16.834 MHz	Measured 26 dB Bandwidth: 24.349 MHz Measured 99% Bandwidth: 16.834 MHz

[Back to the Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**26 dB & 99% BANDWIDTH**

Variant: 802.11a, Channel: 5200.00 MHz, Chain b, Temp: Ambient, Voltage: 5 Vdc

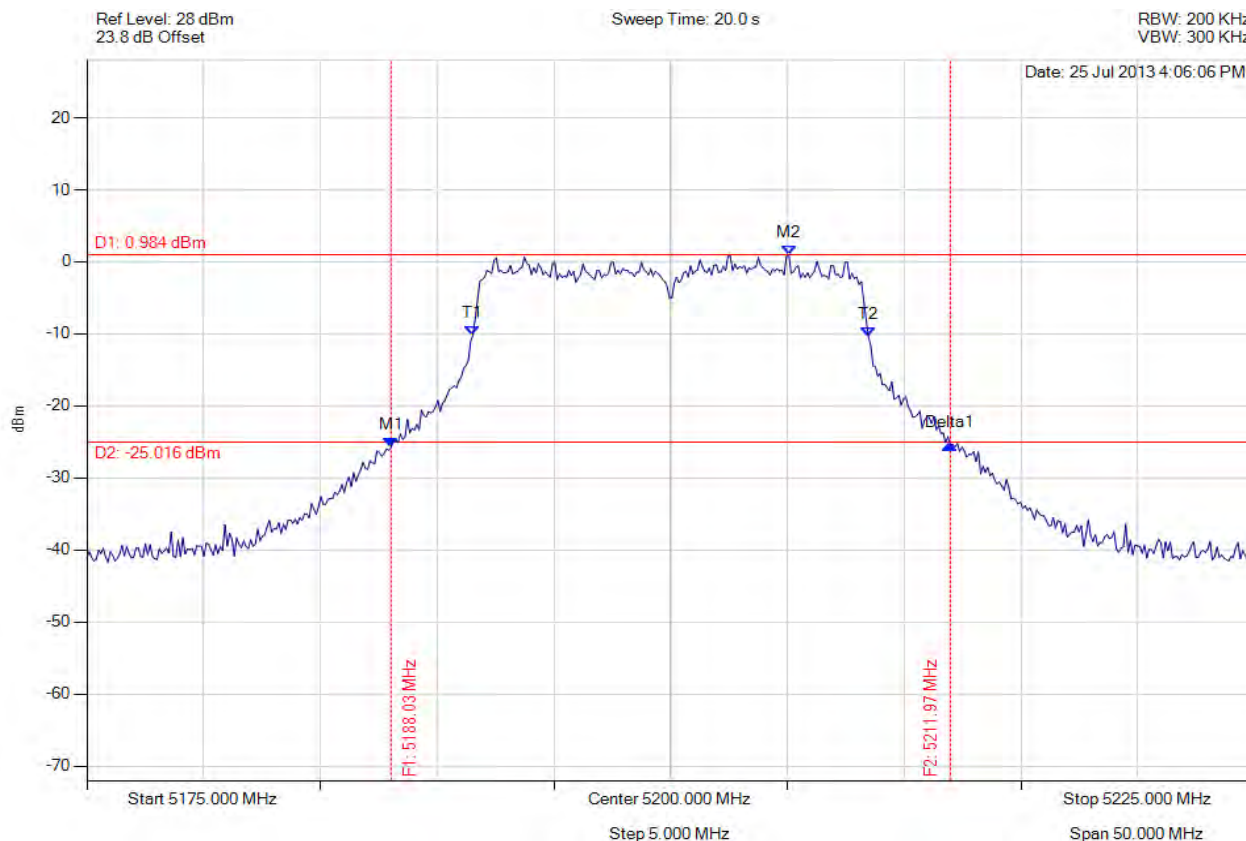

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5188.026 MHz : -25.768 dBm M2 : 5205.060 MHz : 0.984 dBm Delta1 : 23.948 MHz : 0.368 dB T1 : 5191.533 MHz : -10.175 dBm T2 : 5208.467 MHz : -10.332 dBm OBW : 16.934 MHz	Measured 26 dB Bandwidth: 23.948 MHz Measured 99% Bandwidth: 16.934 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 173 of 407



**26 dB & 99% BANDWIDTH**

Variant: 802.11a, Channel: 5200.00 MHz, Chain c, Temp: Ambient, Voltage: 5 Vdc

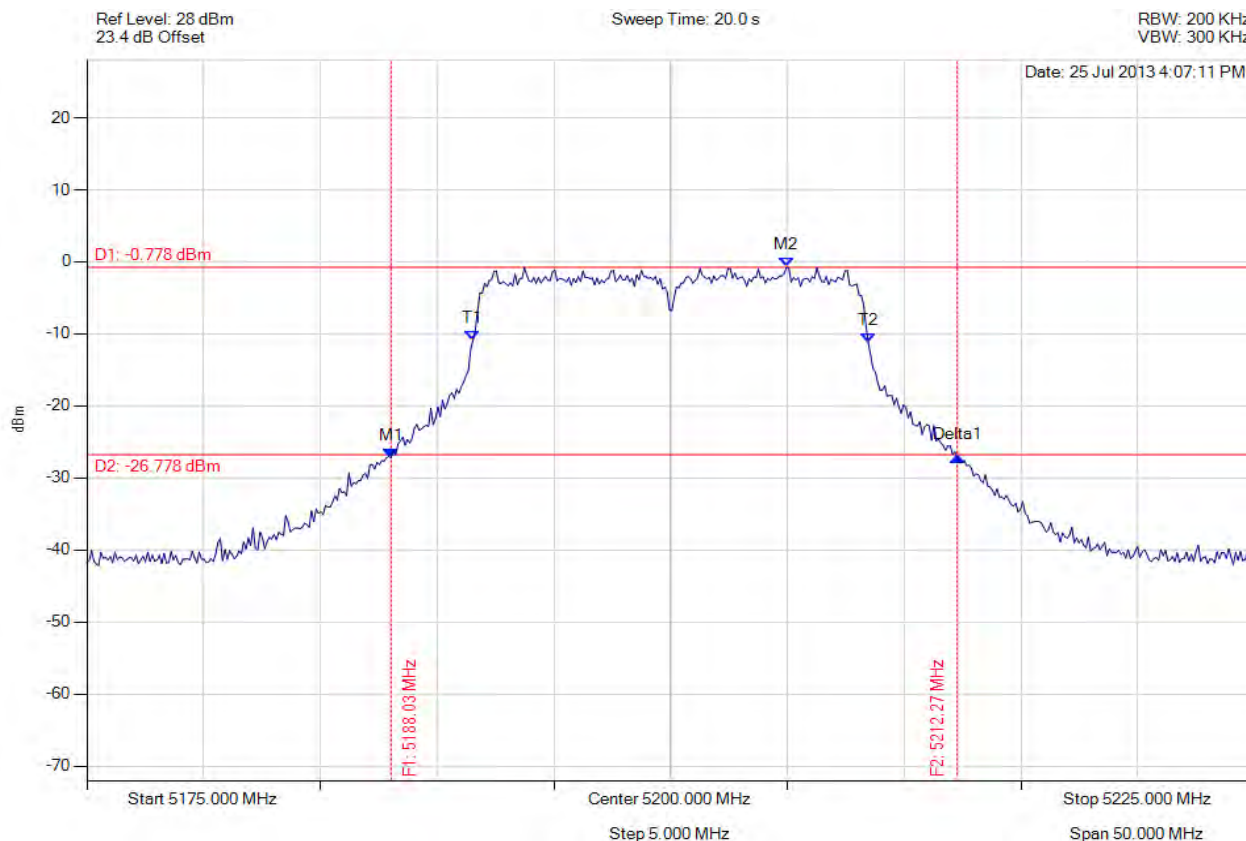

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5188.026 MHz : -27.200 dBm M2 : 5204.960 MHz : -0.778 dBm Delta1 : 24.248 MHz : 0.216 dB T1 : 5191.533 MHz : -10.912 dBm T2 : 5208.467 MHz : -11.274 dBm OBW : 16.934 MHz	Measured 26 dB Bandwidth: 24.248 MHz Measured 99% Bandwidth: 16.934 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11a, Channel: 5240.00 MHz, Chain a, Temp: Ambient, Voltage: 5 Vdc

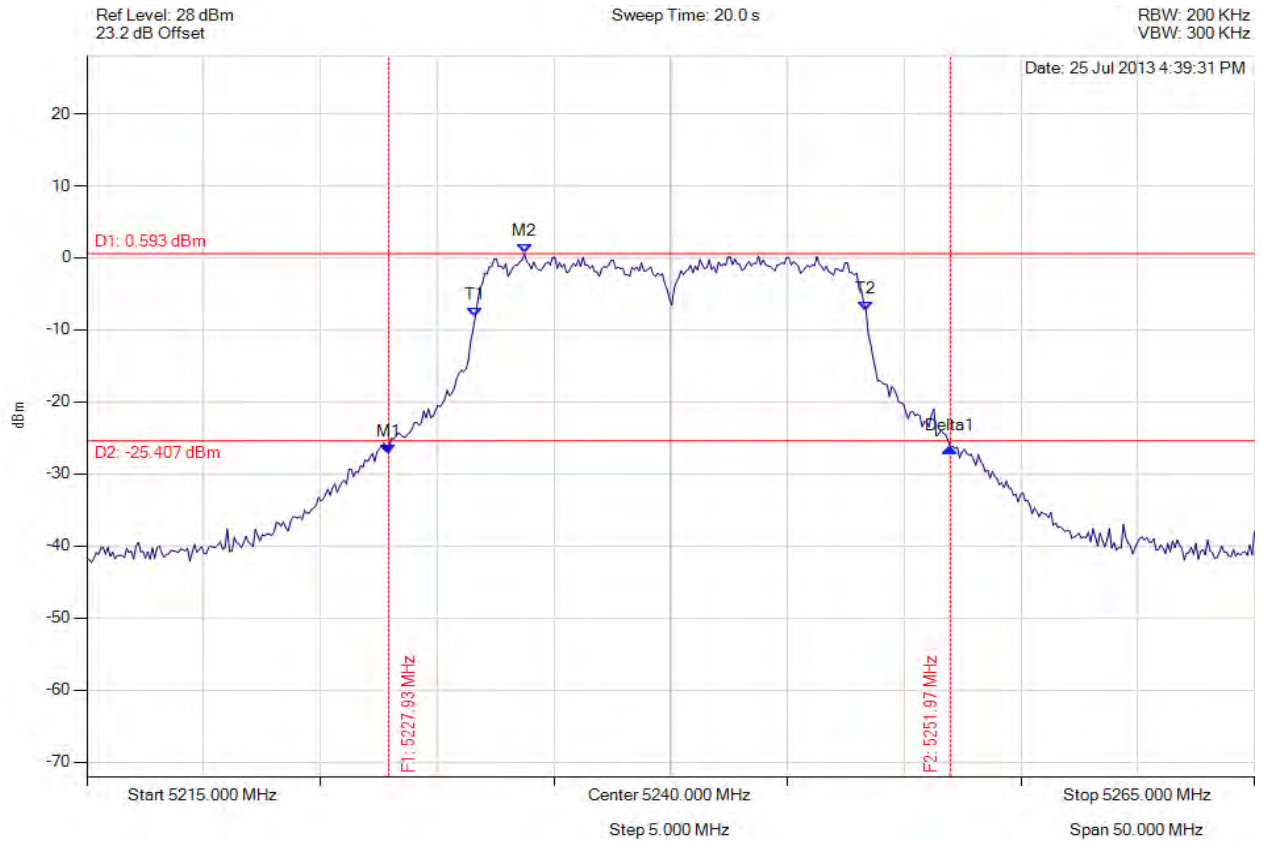

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5227.926 MHz : -27.192 dBm M2 : 5233.737 MHz : 0.593 dBm Delta1 : 24.048 MHz : 0.856 dB T1 : 5231.633 MHz : -8.156 dBm T2 : 5248.367 MHz : -7.365 dBm OBW : 16.733 MHz	Measured 26 dB Bandwidth: 24.048 MHz Measured 99% Bandwidth: 16.733 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 175 of 407



**26 dB & 99% BANDWIDTH**

Variant: 802.11a, Channel: 5240.00 MHz, Chain b, Temp: Ambient, Voltage: 5 Vdc

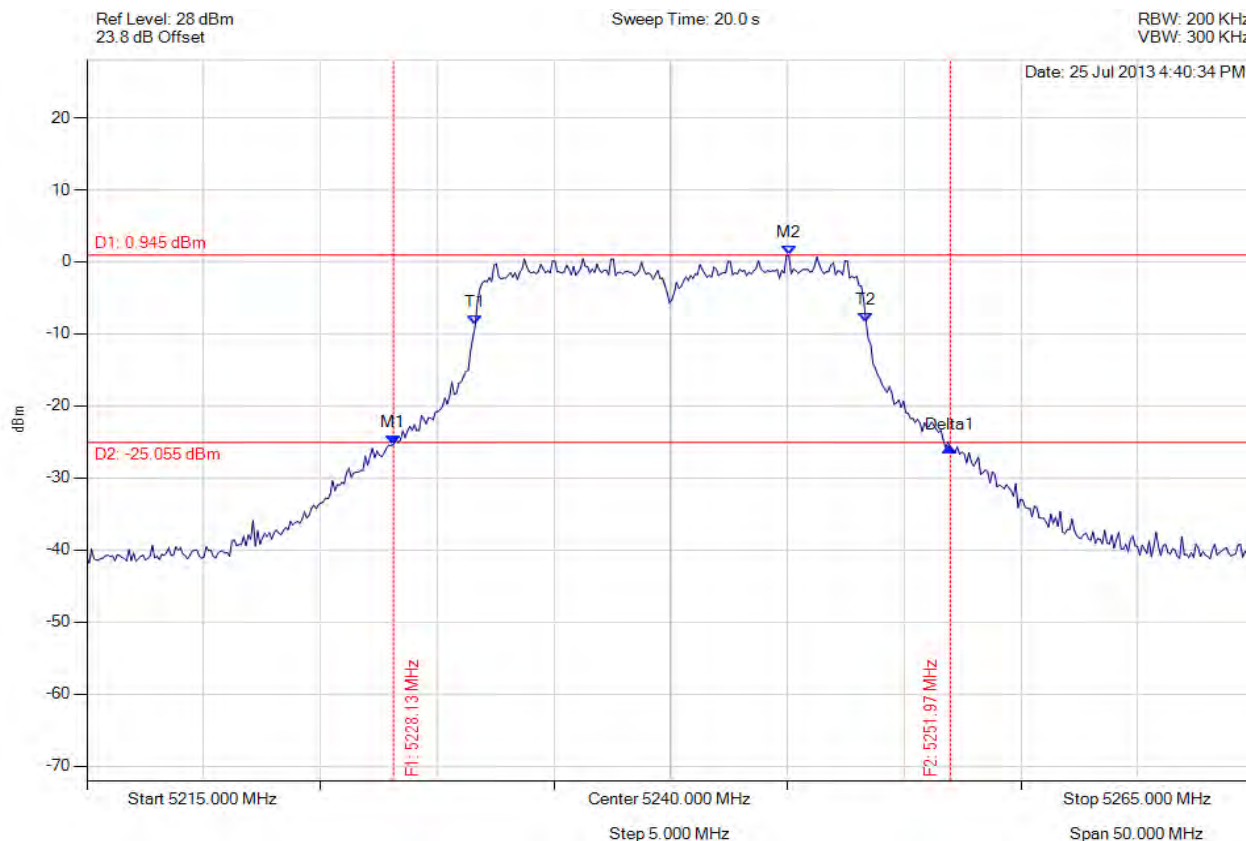

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5228.126 MHz : -25.390 dBm M2 : 5245.060 MHz : 0.945 dBm Delta1 : 23.848 MHz : -0.350 dB T1 : 5231.633 MHz : -8.736 dBm T2 : 5248.367 MHz : -8.339 dBm OBW : 16.733 MHz	Measured 26 dB Bandwidth: 23.848 MHz Measured 99% Bandwidth: 16.733 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11a, Channel: 5240.00 MHz, Chain c, Temp: Ambient, Voltage: 5 Vdc

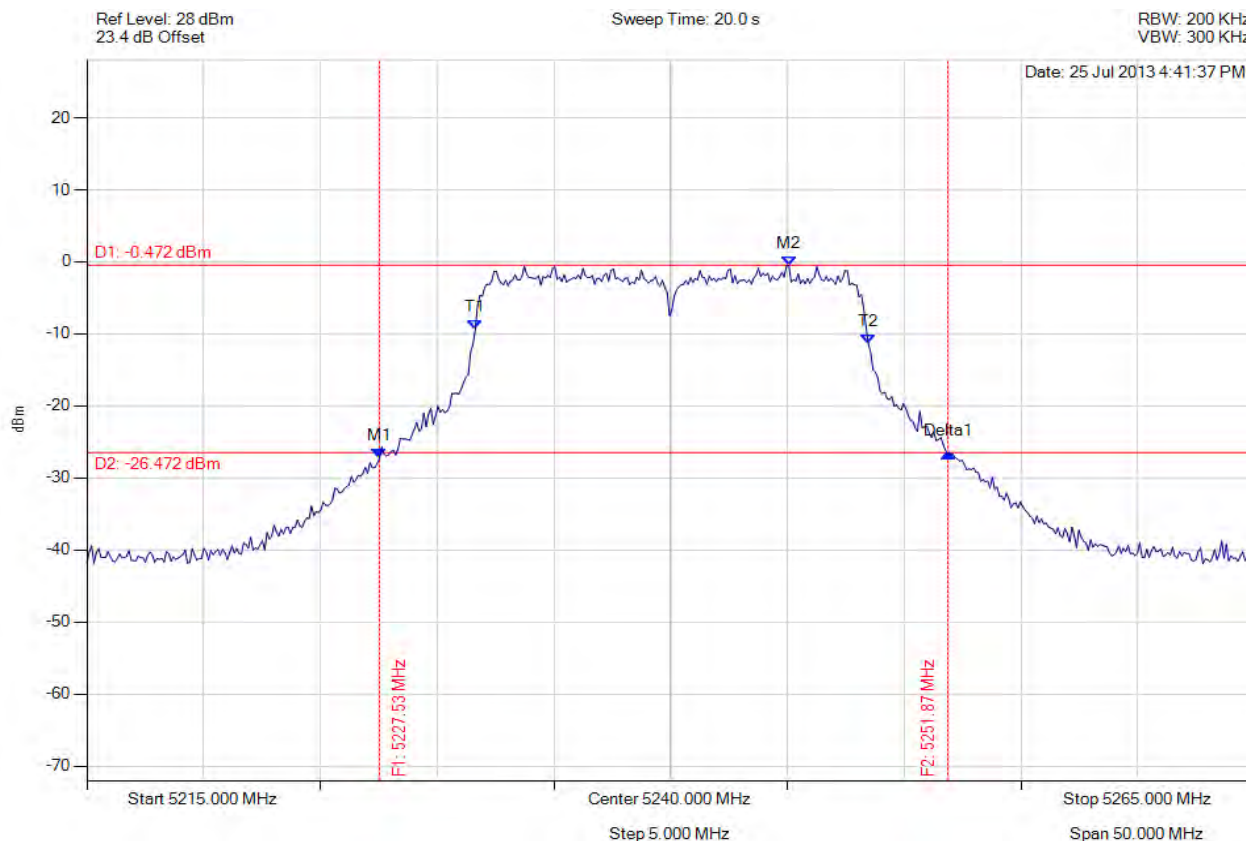

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5227.525 MHz : -27.287 dBm M2 : 5245.060 MHz : -0.472 dBm Delta1 : 24.349 MHz : 0.708 dB T1 : 5231.633 MHz : -9.411 dBm T2 : 5248.467 MHz : -11.386 dBm OBW : 16.834 MHz	Measured 26 dB Bandwidth: 24.349 MHz Measured 99% Bandwidth: 16.834 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-20, Channel: 5180.00 MHz, Chain a, Temp: Ambient, Voltage: 5 Vdc

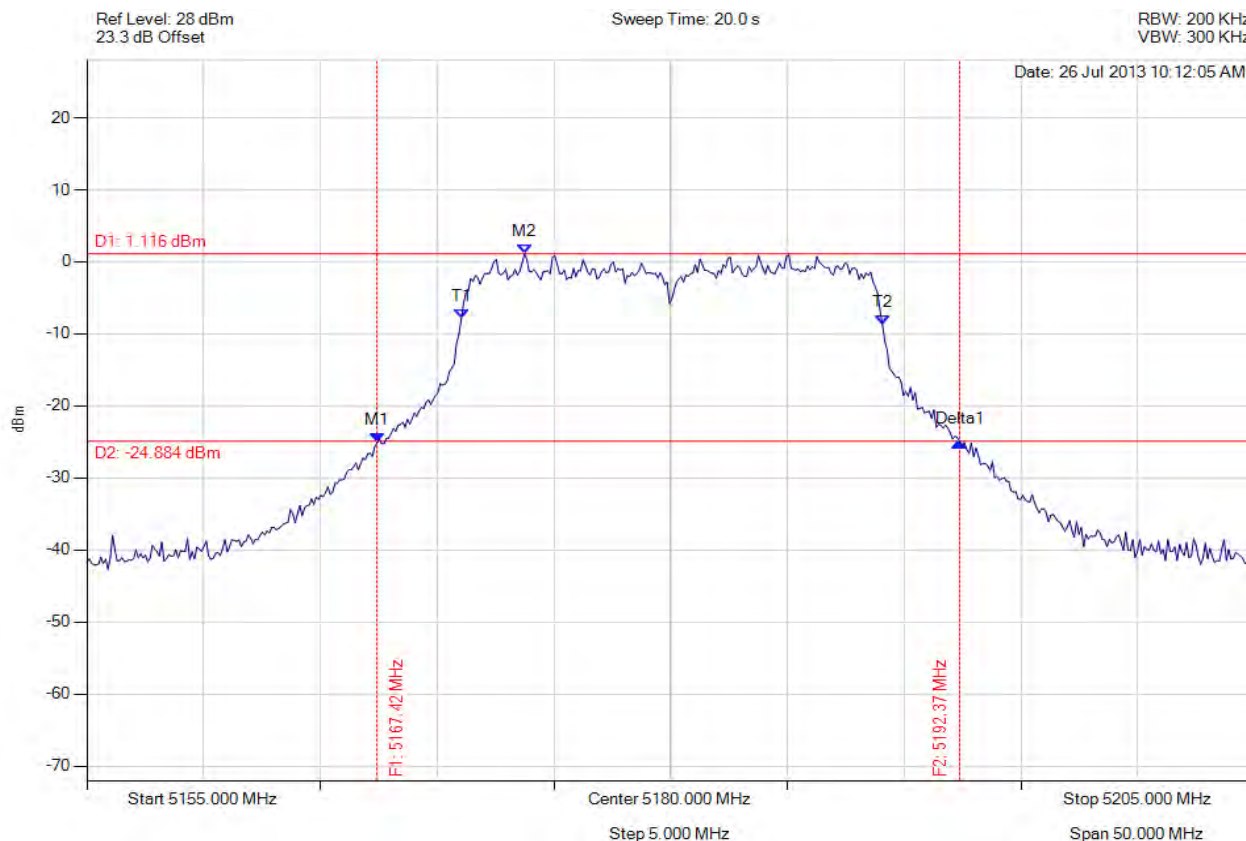

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5167.425 MHz : -25.128 dBm M2 : 5173.737 MHz : 1.116 dBm Delta1 : 24.950 MHz : 0.155 dB T1 : 5171.032 MHz : -7.951 dBm T2 : 5189.068 MHz : -8.673 dBm OBW : 18.036 MHz	Measured 26 dB Bandwidth: 24.950 MHz Measured 99% Bandwidth: 18.036 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-20, Channel: 5180.00 MHz, Chain b, Temp: Ambient, Voltage: 5 Vdc

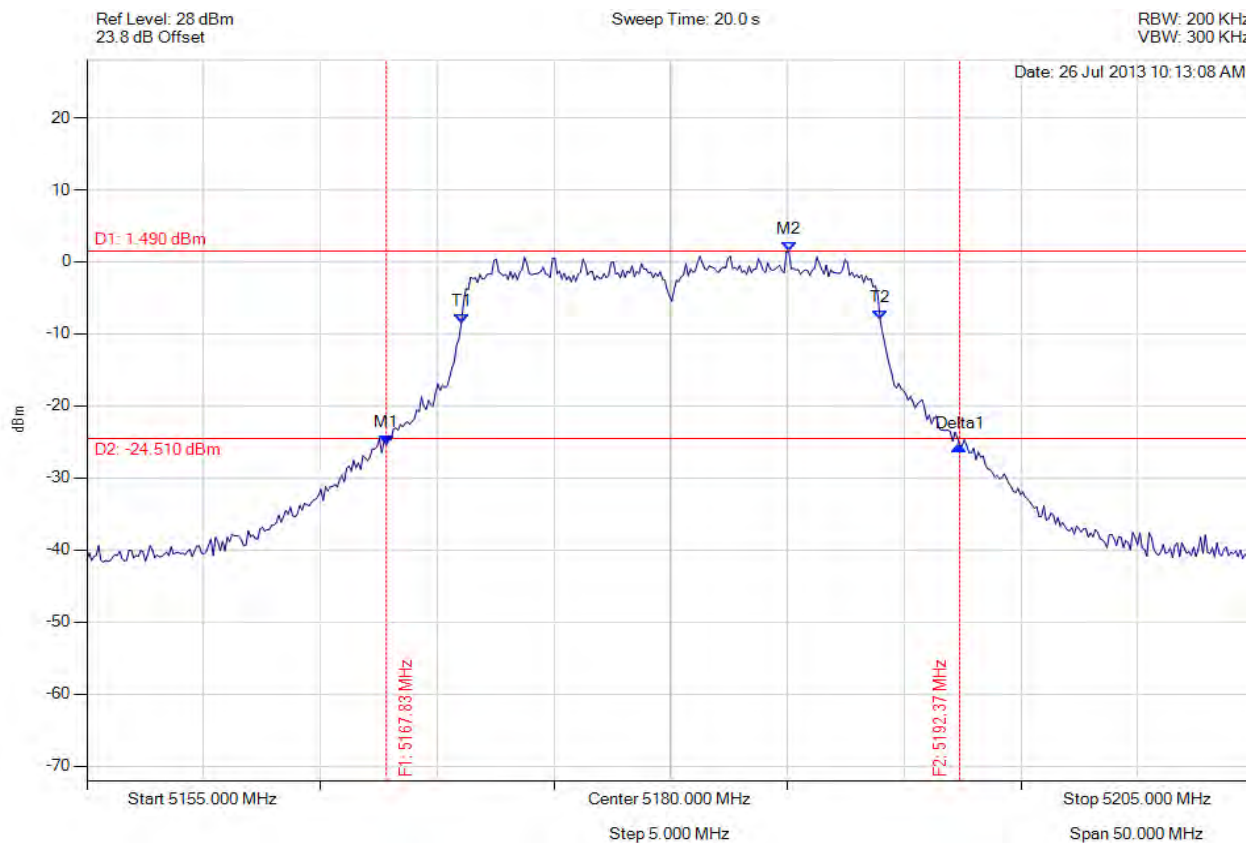

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5167.826 MHz : -25.418 dBm M2 : 5185.060 MHz : 1.490 dBm Delta1 : 24.549 MHz : -0.140 dB T1 : 5171.032 MHz : -8.569 dBm T2 : 5188.968 MHz : -8.001 dBm OBW : 17.936 MHz	Measured 26 dB Bandwidth: 24.549 MHz Measured 99% Bandwidth: 17.936 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-20, Channel: 5180.00 MHz, Chain c, Temp: Ambient, Voltage: 5 Vdc

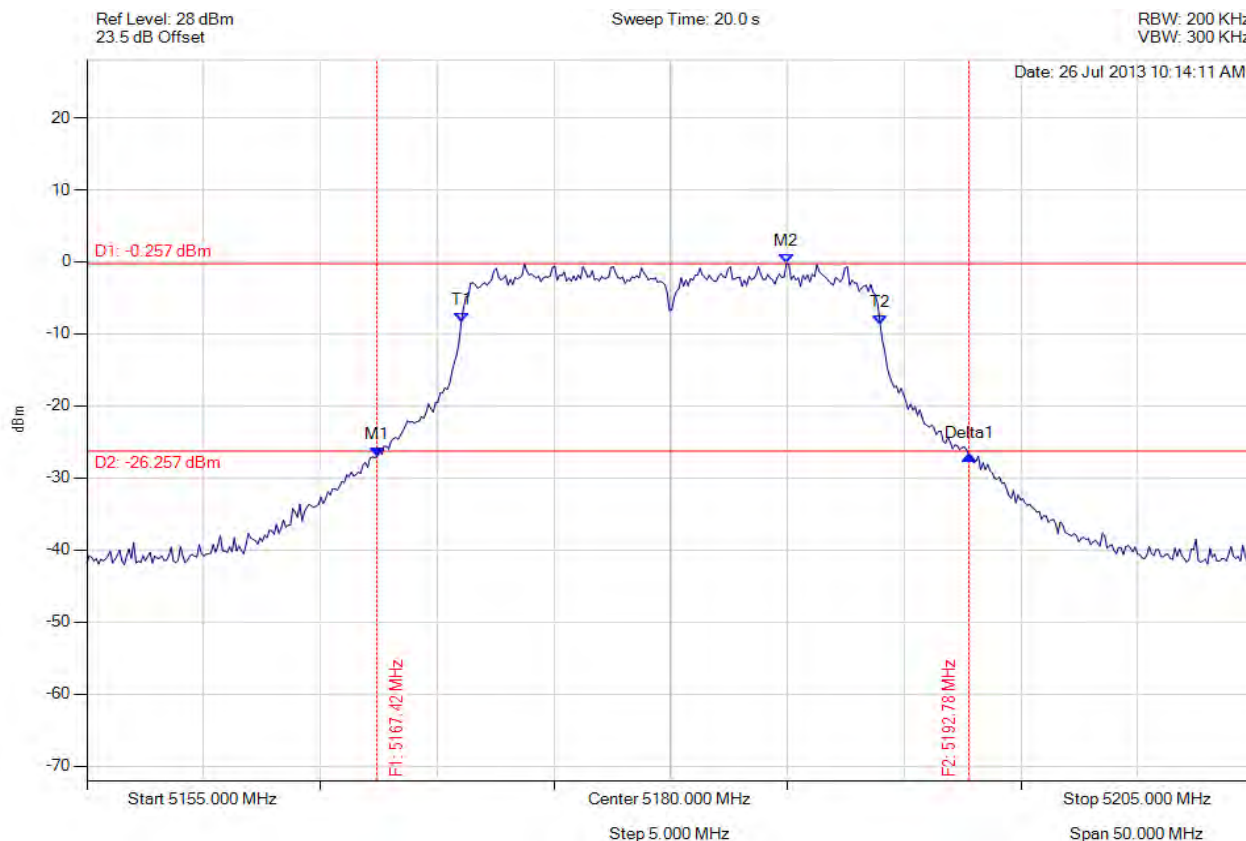

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5167.425 MHz : -27.031 dBm M2 : 5184.960 MHz : -0.257 dBm Delta1 : 25.351 MHz : 0.159 dB T1 : 5171.032 MHz : -8.308 dBm T2 : 5188.968 MHz : -8.648 dBm OBW : 17.936 MHz	Measured 26 dB Bandwidth: 25.351 MHz Measured 99% Bandwidth: 17.936 MHz

[Back to the Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-20, Channel: 5200.00 MHz, Chain a, Temp: Ambient, Voltage: 5 Vdc

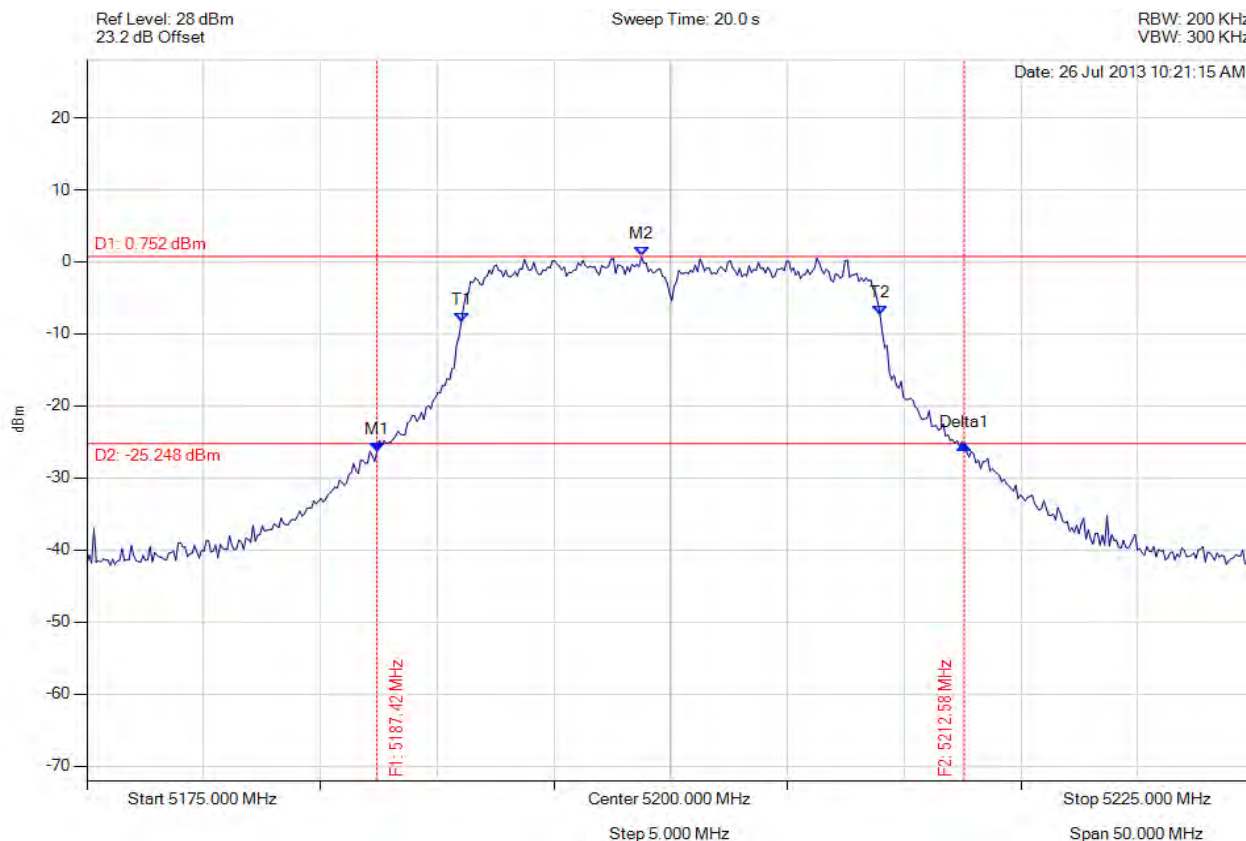

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5187.425 MHz : -26.315 dBm M2 : 5198.747 MHz : 0.752 dBm Delta1 : 25.150 MHz : 0.942 dB T1 : 5191.032 MHz : -8.376 dBm T2 : 5208.968 MHz : -7.367 dBm OBW : 17.936 MHz	Measured 26 dB Bandwidth: 25.150 MHz Measured 99% Bandwidth: 17.936 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-20, Channel: 5200.00 MHz, Chain b, Temp: Ambient, Voltage: 5 Vdc

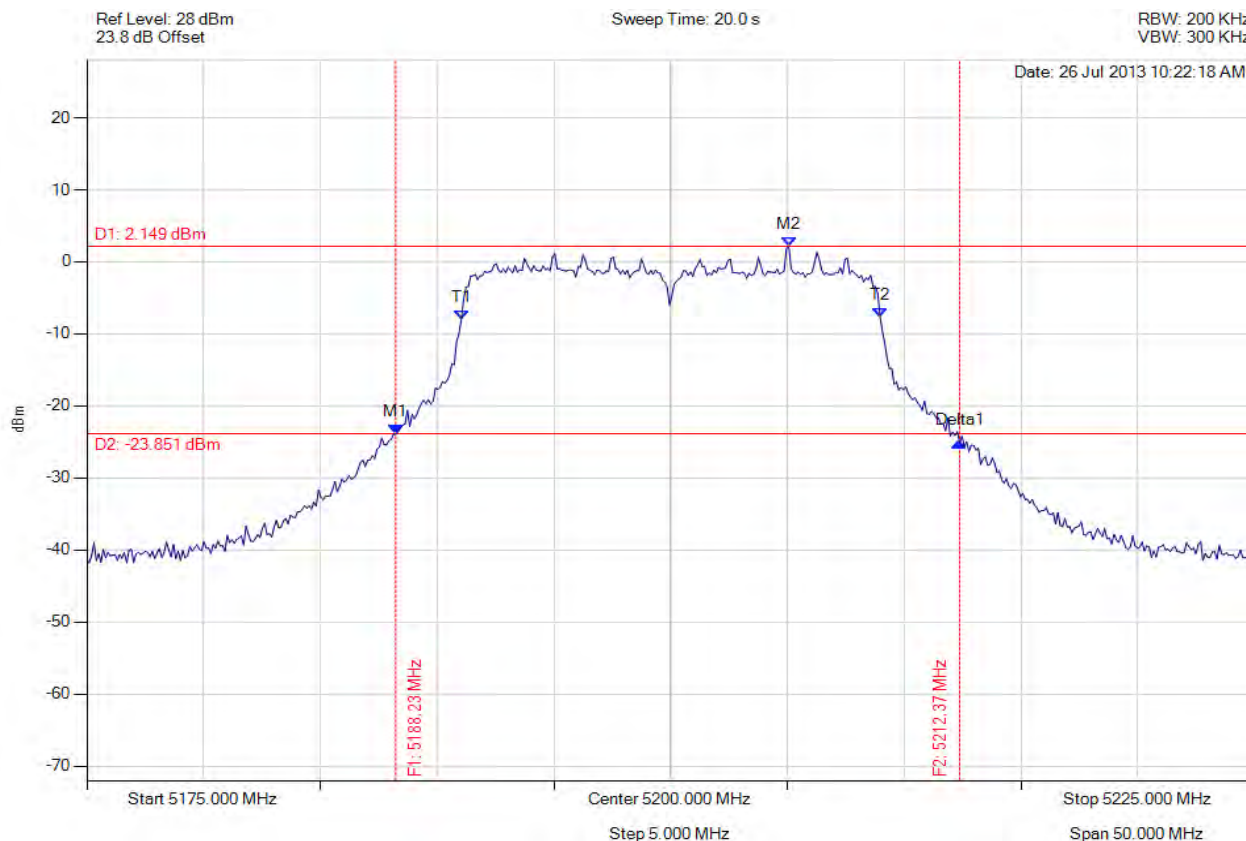

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5188.226 MHz : -23.917 dBm M2 : 5205.060 MHz : 2.149 dBm Delta1 : 24.148 MHz : -1.204 dB T1 : 5191.032 MHz : -8.058 dBm T2 : 5208.968 MHz : -7.662 dBm OBW : 17.936 MHz	Measured 26 dB Bandwidth: 24.148 MHz Measured 99% Bandwidth: 17.936 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-20, Channel: 5200.00 MHz, Chain c, Temp: Ambient, Voltage: 5 Vdc

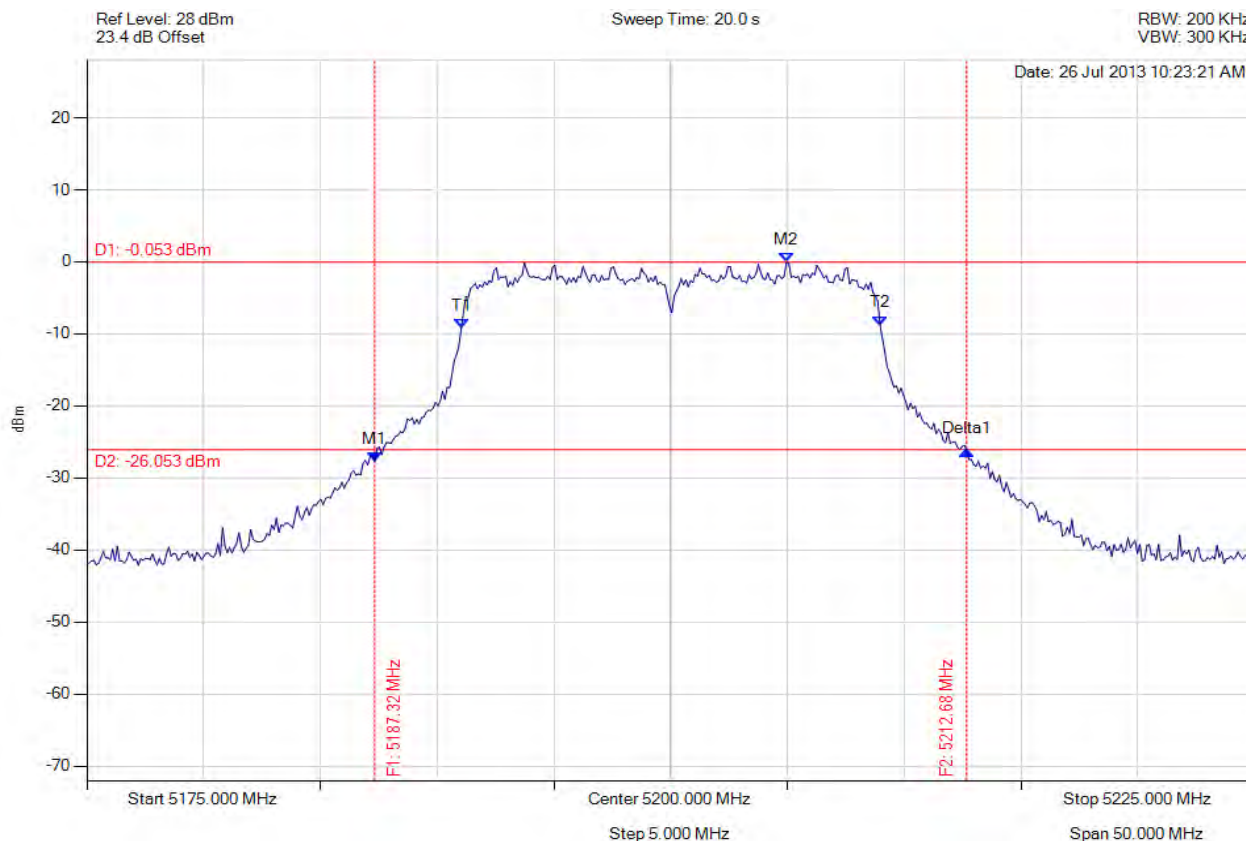

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5187.325 MHz : -27.719 dBm M2 : 5204.960 MHz : -0.053 dBm Delta1 : 25.351 MHz : 1.570 dB T1 : 5191.032 MHz : -9.171 dBm T2 : 5208.968 MHz : -8.795 dBm OBW : 17.936 MHz	Measured 26 dB Bandwidth: 25.351 MHz Measured 99% Bandwidth: 17.936 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-20, Channel: 5240.00 MHz, Chain a, Temp: Ambient, Voltage: 5 Vdc

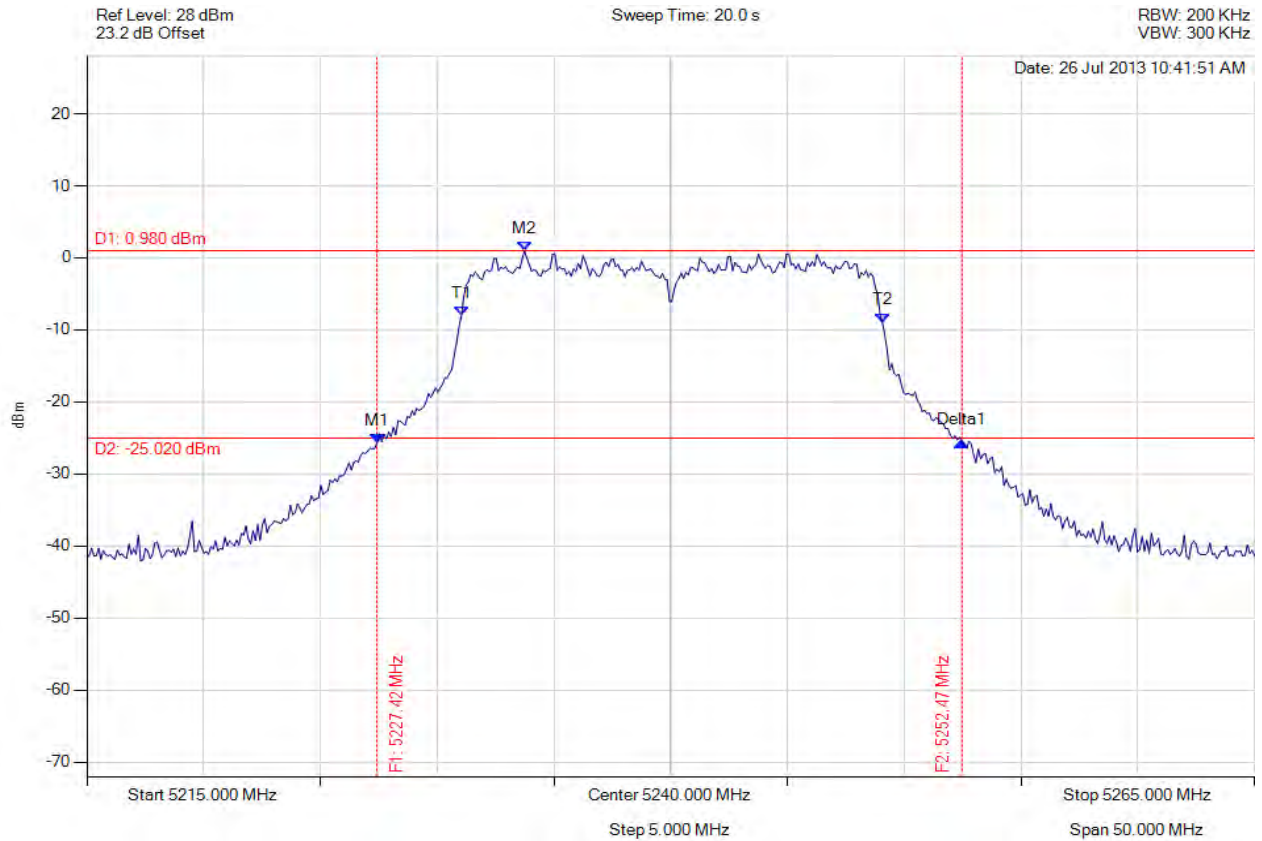

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5227.425 MHz : -25.660 dBm M2 : 5233.737 MHz : 0.980 dBm Delta1 : 25.050 MHz : 0.065 dB T1 : 5231.032 MHz : -8.115 dBm T2 : 5249.068 MHz : -8.963 dBm OBW : 18.036 MHz	Measured 26 dB Bandwidth: 25.050 MHz Measured 99% Bandwidth: 18.036 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-20, Channel: 5240.00 MHz, Chain b, Temp: Ambient, Voltage: 5 Vdc

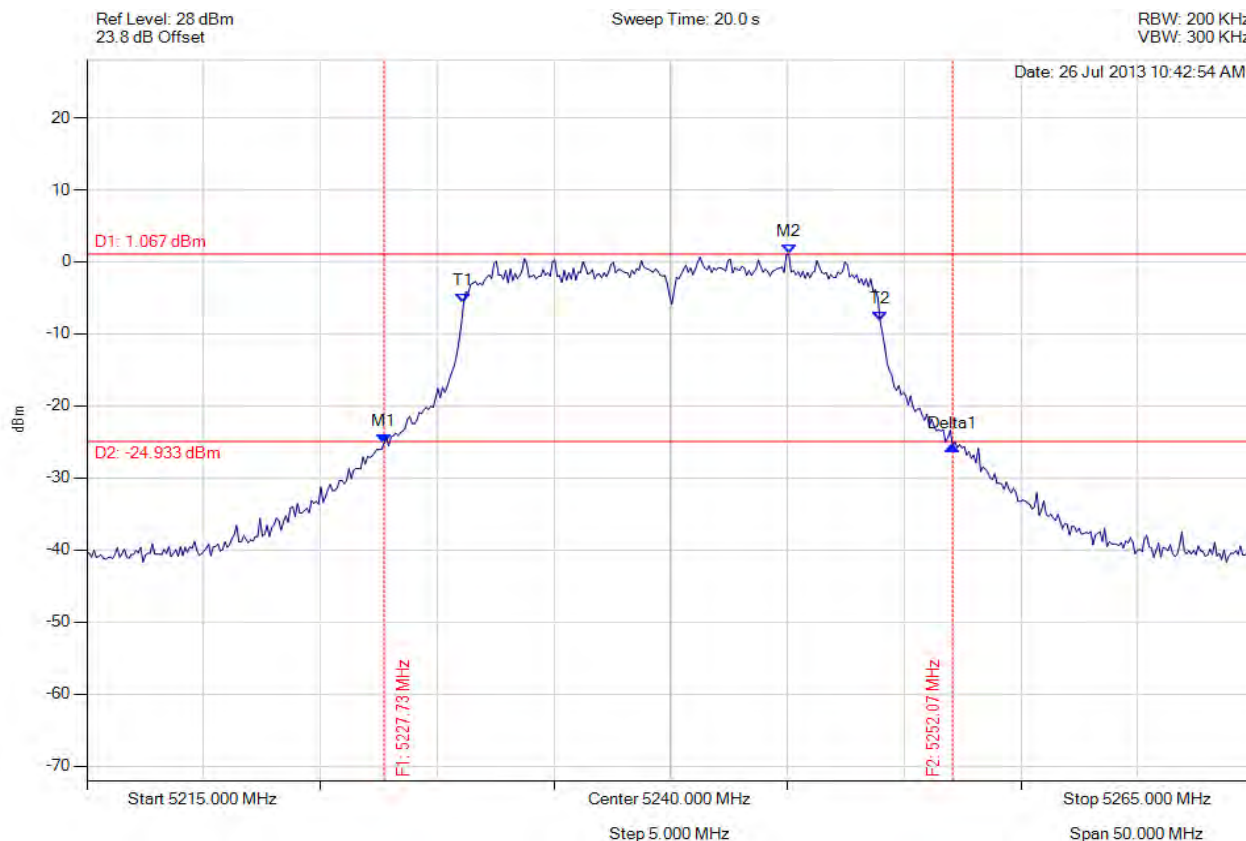

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5227.725 MHz : -25.201 dBm M2 : 5245.060 MHz : 1.067 dBm Delta1 : 24.349 MHz : -0.421 dB T1 : 5231.132 MHz : -5.667 dBm T2 : 5248.968 MHz : -8.180 dBm OBW : 17.836 MHz	Measured 26 dB Bandwidth: 24.349 MHz Measured 99% Bandwidth: 17.836 MHz

[Back to the Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-20, Channel: 5240.00 MHz, Chain c, Temp: Ambient, Voltage: 5 Vdc

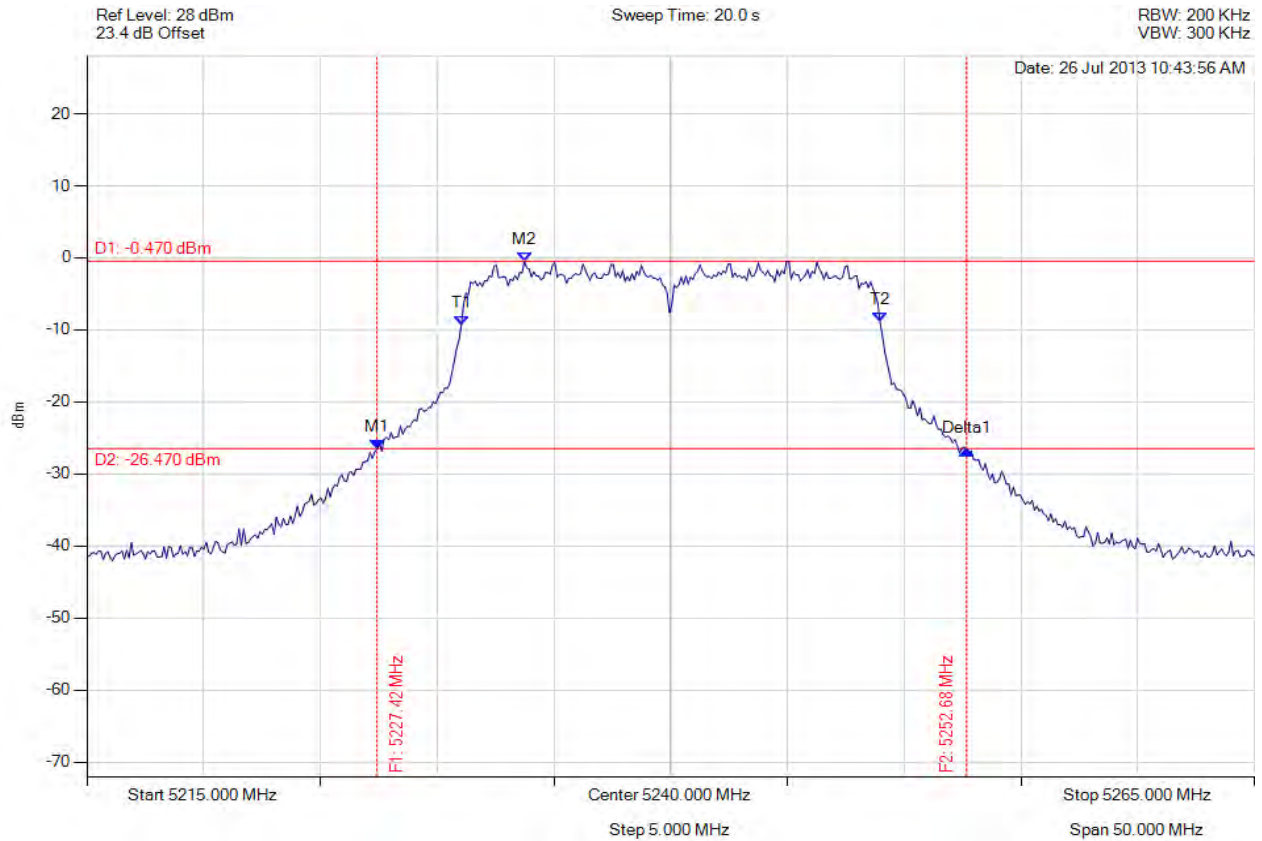

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5227.425 MHz : -26.486 dBm M2 : 5233.737 MHz : -0.470 dBm Delta1 : 25.251 MHz : -0.218 dB T1 : 5231.032 MHz : -9.417 dBm T2 : 5248.968 MHz : -8.945 dBm OBW : 17.936 MHz	Measured 26 dB Bandwidth: 25.251 MHz Measured 99% Bandwidth: 17.936 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-40, Channel: 5190.00 MHz, Chain a, Temp: Ambient, Voltage: 5 Vdc

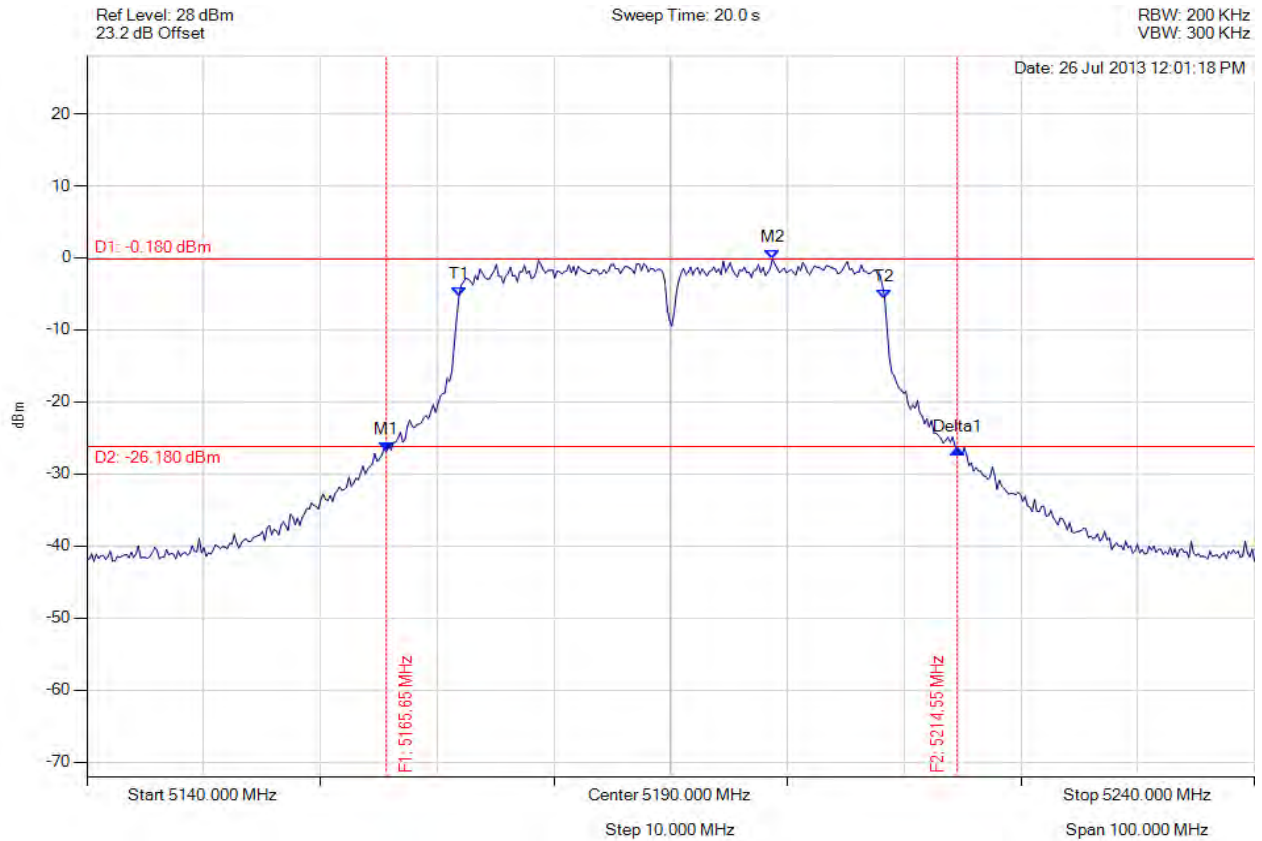

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5165.651 MHz : -26.860 dBm M2 : 5198.717 MHz : -0.180 dBm Delta1 : 48.898 MHz : 0.291 dB T1 : 5171.864 MHz : -5.303 dBm T2 : 5208.337 MHz : -5.724 dBm OBW : 36.473 MHz	Measured 26 dB Bandwidth: 48.898 MHz Measured 99% Bandwidth: 36.473 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-40, Channel: 5190.00 MHz, Chain b, Temp: Ambient, Voltage: 5 Vdc

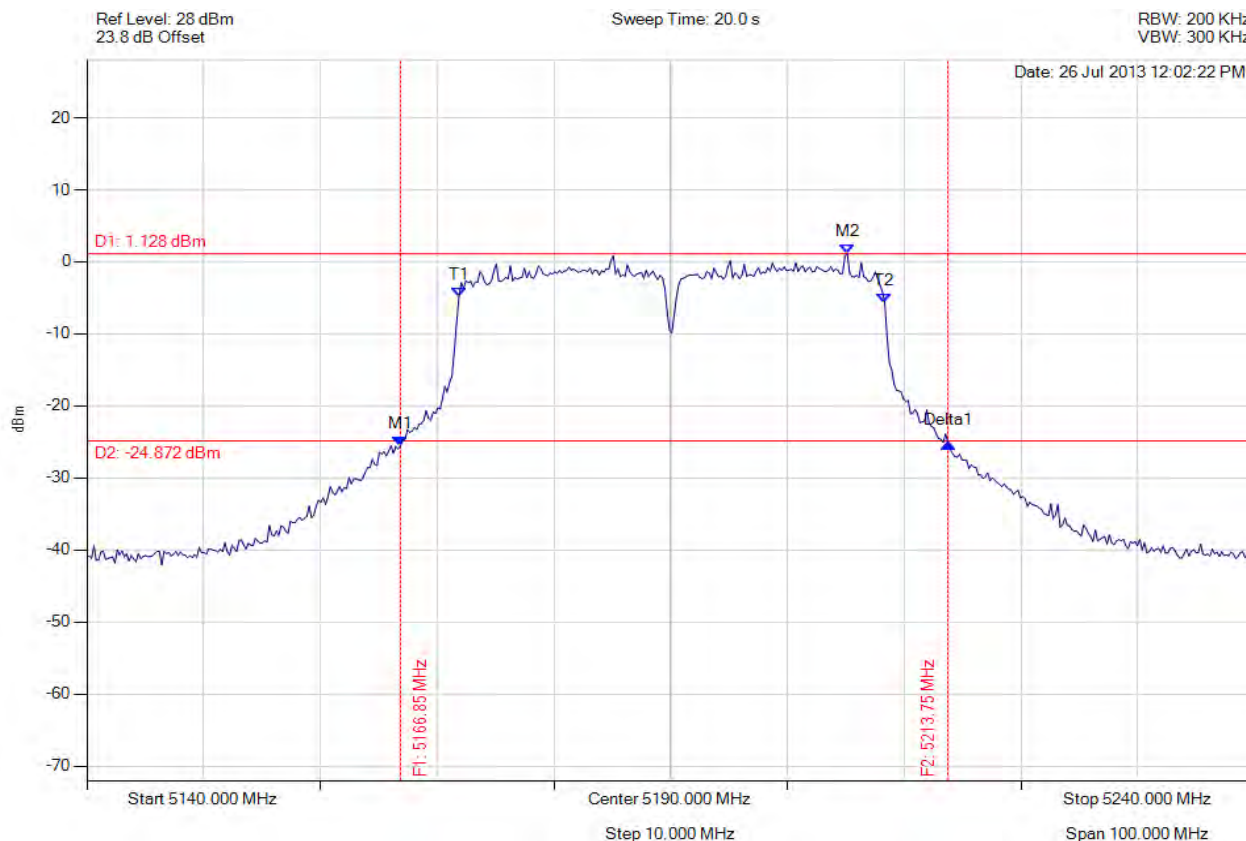

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5166.854 MHz : -25.557 dBm M2 : 5205.130 MHz : 1.128 dBm Delta1 : 46.894 MHz : 0.423 dB T1 : 5171.864 MHz : -4.859 dBm T2 : 5208.337 MHz : -5.722 dBm OBW : 36.473 MHz	Measured 26 dB Bandwidth: 46.894 MHz Measured 99% Bandwidth: 36.473 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.






**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 188 of 407



**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-40, Channel: 5190.00 MHz, Chain c, Temp: Ambient, Voltage: 5 Vdc

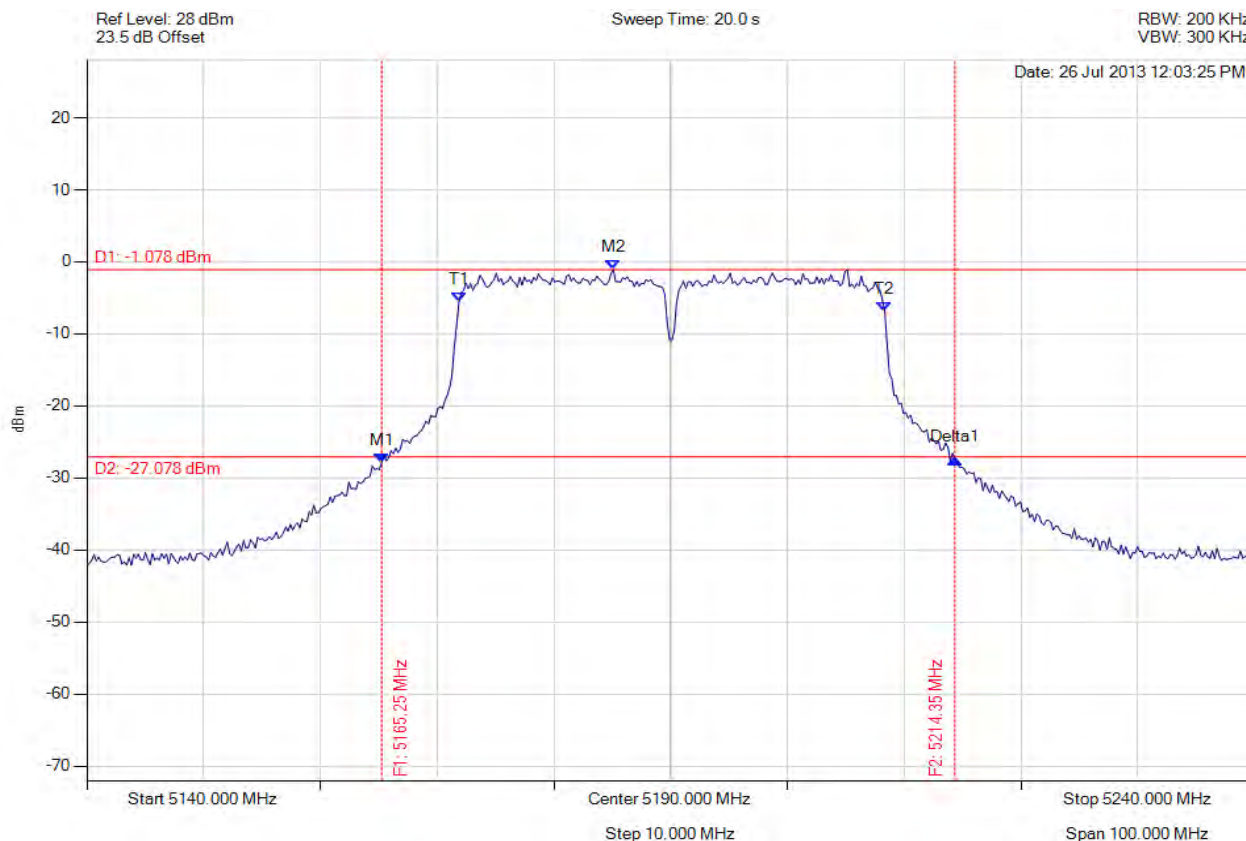

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5165.251 MHz : -27.871 dBm M2 : 5185.090 MHz : -1.078 dBm Delta1 : 49.098 MHz : 0.517 dB T1 : 5171.864 MHz : -5.583 dBm T2 : 5208.337 MHz : -6.940 dBm OBW : 36.473 MHz	Measured 26 dB Bandwidth: 49.098 MHz Measured 99% Bandwidth: 36.473 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 189 of 407



**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-40, Channel: 5230.00 MHz, Chain a, Temp: Ambient, Voltage: 5 Vdc

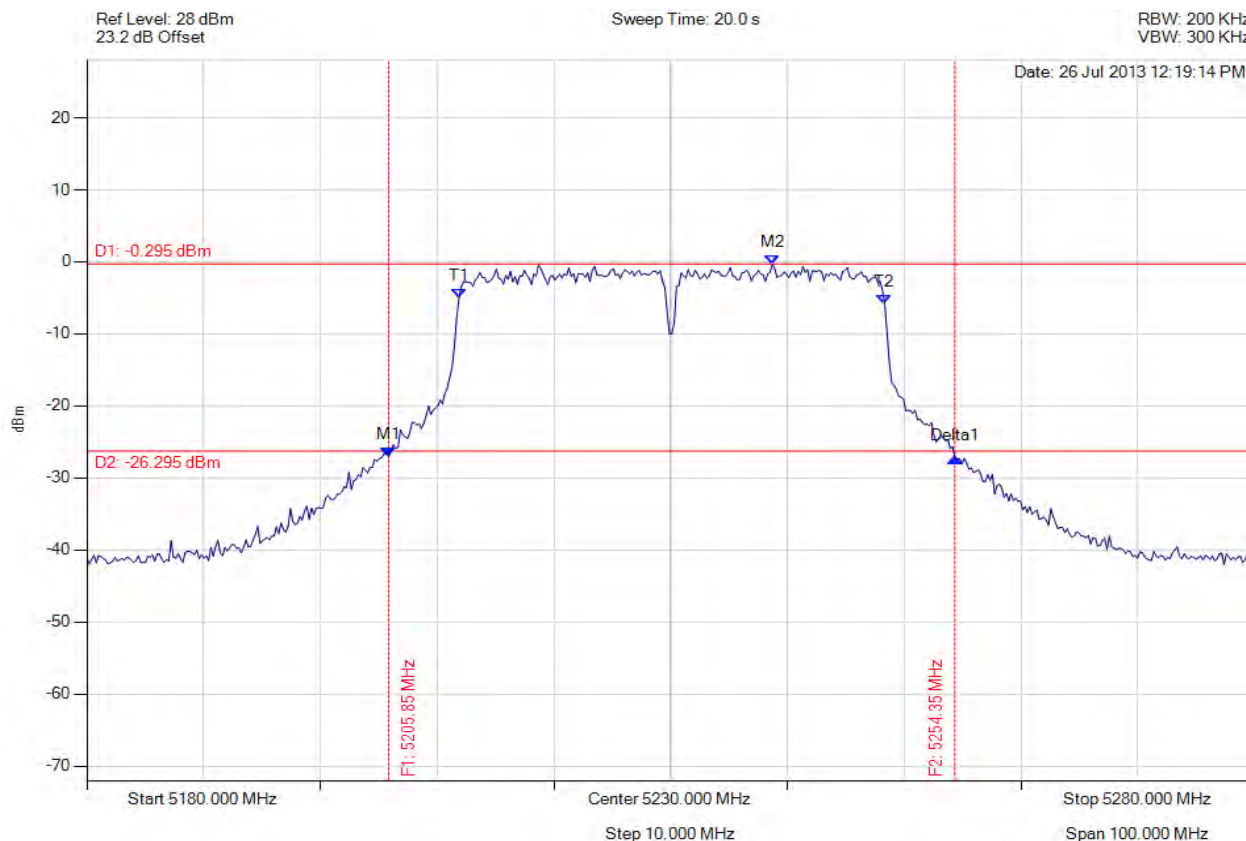

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5205.852 MHz : -27.021 dBm M2 : 5238.717 MHz : -0.295 dBm Delta1 : 48.497 MHz : -0.161 dB T1 : 5211.864 MHz : -5.032 dBm T2 : 5248.337 MHz : -5.907 dBm OBW : 36.473 MHz	Measured 26 dB Bandwidth: 48.497 MHz Measured 99% Bandwidth: 36.473 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-40, Channel: 5230.00 MHz, Chain b, Temp: Ambient, Voltage: 5 Vdc

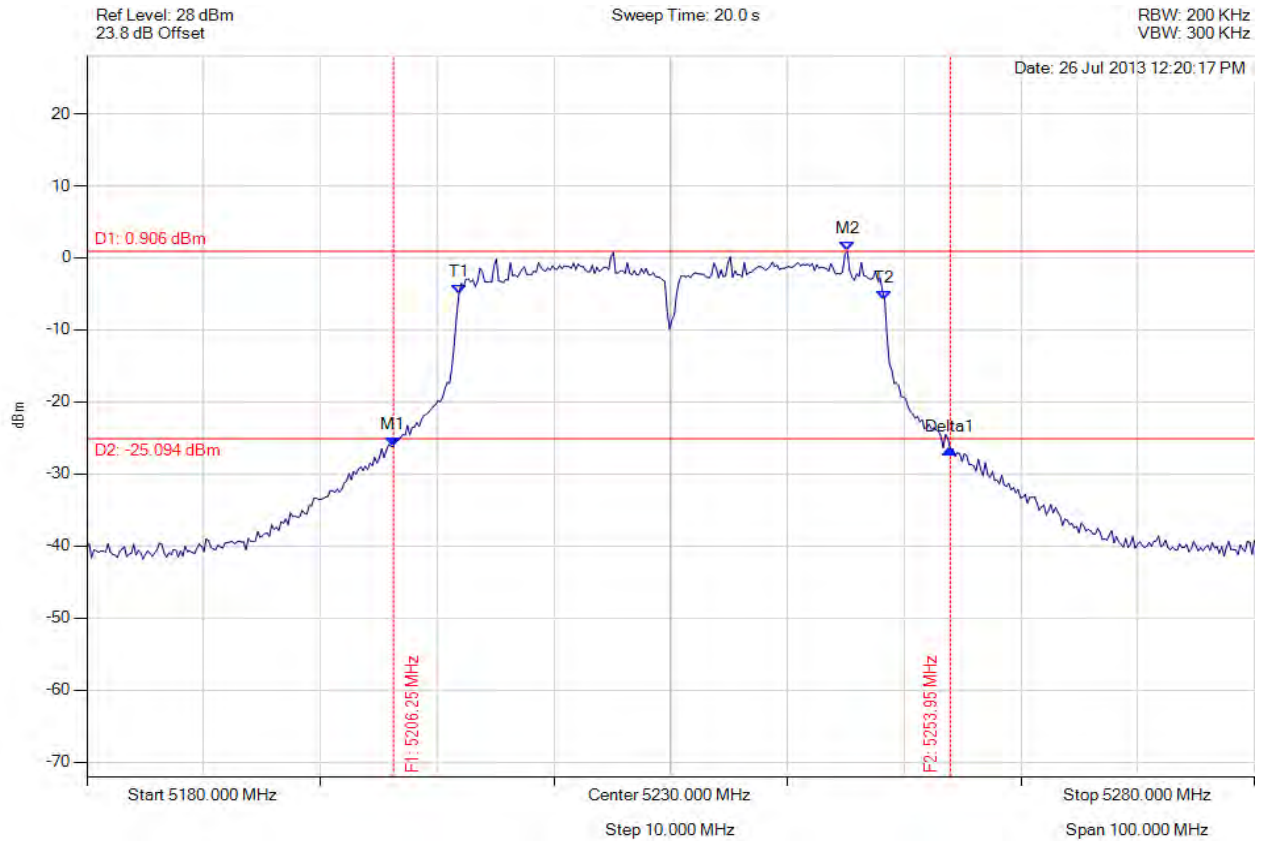

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5206.253 MHz : -26.175 dBm M2 : 5245.130 MHz : 0.906 dBm Delta1 : 47.695 MHz : -0.334 dB T1 : 5211.864 MHz : -4.998 dBm T2 : 5248.337 MHz : -5.909 dBm OBW : 36.473 MHz	Measured 26 dB Bandwidth: 47.695 MHz Measured 99% Bandwidth: 36.473 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-40, Channel: 5230.00 MHz, Chain c, Temp: Ambient, Voltage: 5 Vdc

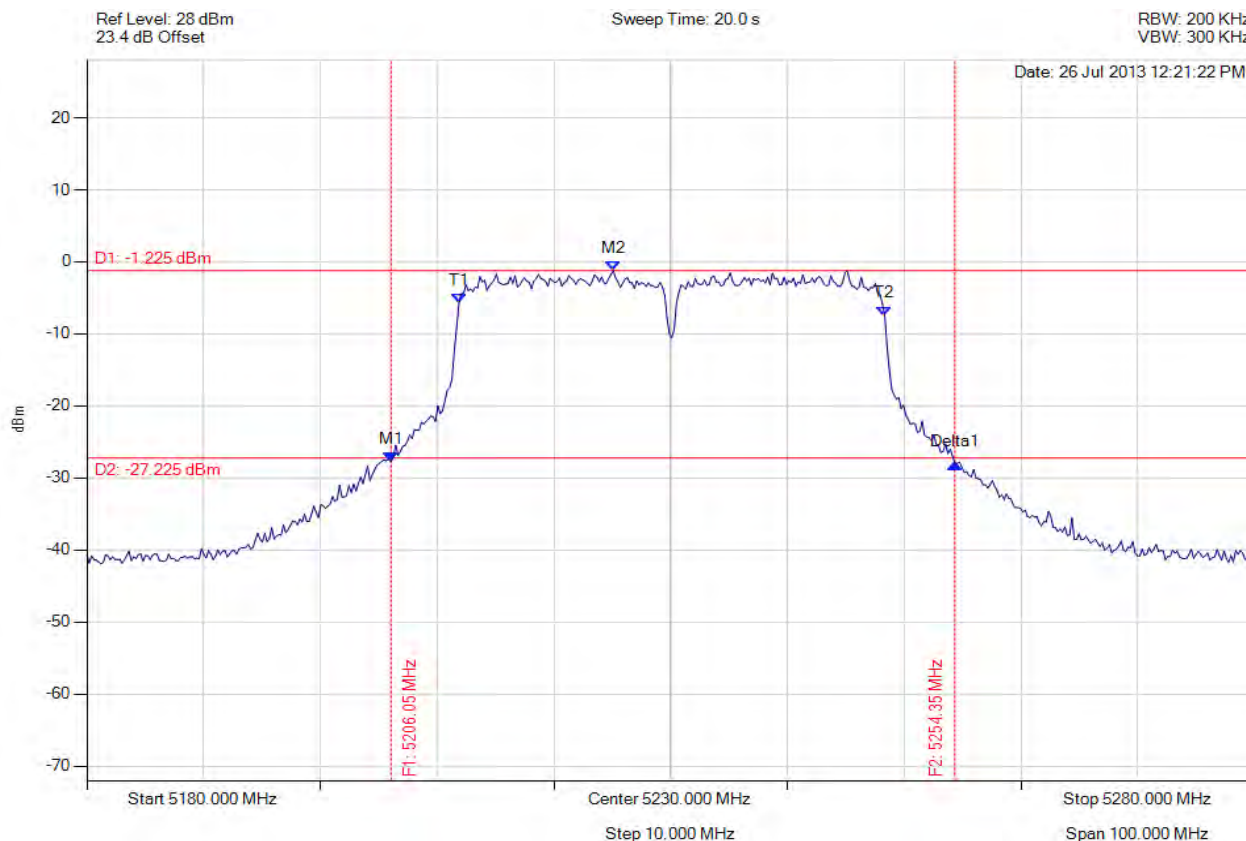

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5206.052 MHz : -27.755 dBm M2 : 5225.090 MHz : -1.225 dBm Delta1 : 48.297 MHz : -0.309 dB T1 : 5211.864 MHz : -5.724 dBm T2 : 5248.337 MHz : -7.466 dBm OBW : 36.473 MHz	Measured 26 dB Bandwidth: 48.297 MHz Measured 99% Bandwidth: 36.473 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11ac-40, Channel: 5190.00 MHz, Chain a, Temp: Ambient, Voltage: 5 Vdc

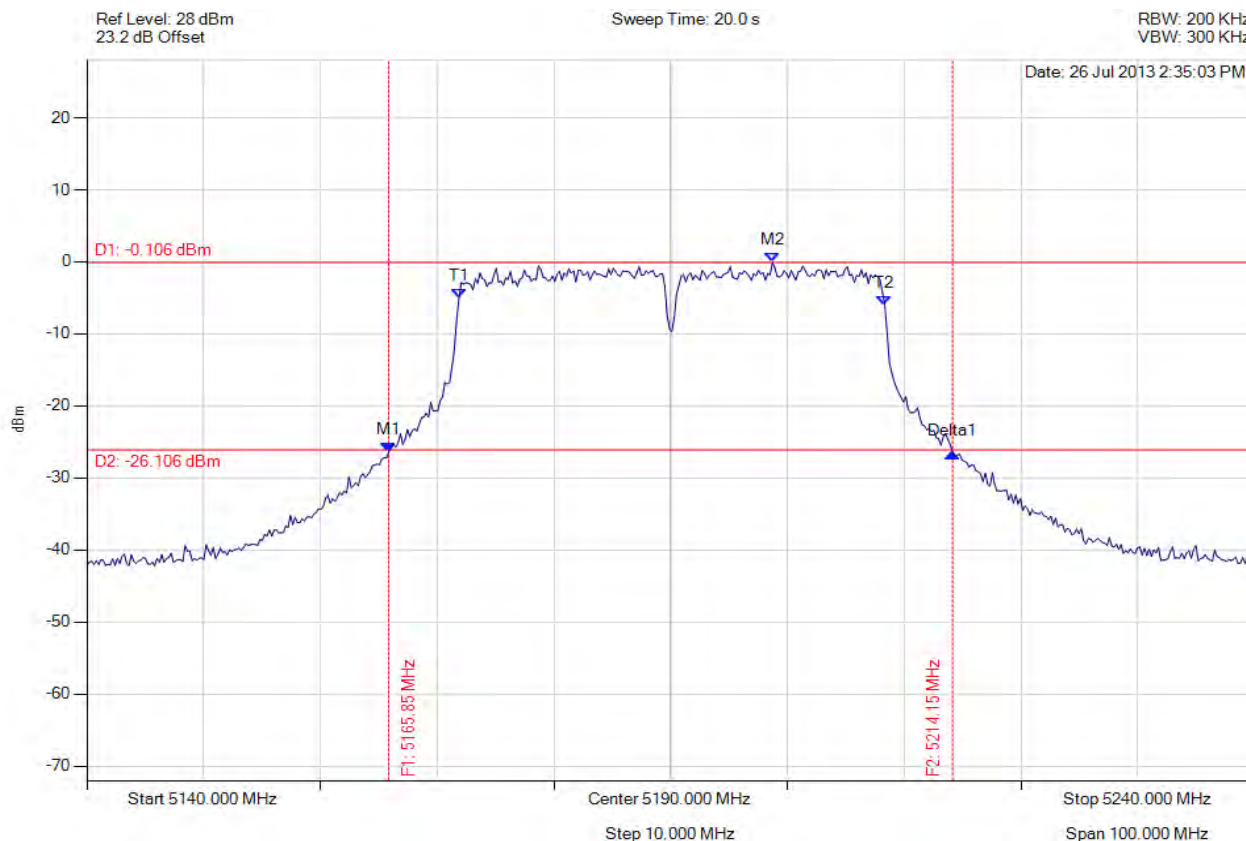

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5165.852 MHz : -26.376 dBm M2 : 5198.717 MHz : -0.106 dBm Delta1 : 48.297 MHz : -0.163 dB T1 : 5171.864 MHz : -4.991 dBm T2 : 5208.337 MHz : -5.988 dBm OBW : 36.473 MHz	Measured 26 dB Bandwidth: 48.297 MHz Measured 99% Bandwidth: 36.473 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11ac-40, Channel: 5190.00 MHz, Chain b, Temp: Ambient, Voltage: 5 Vdc

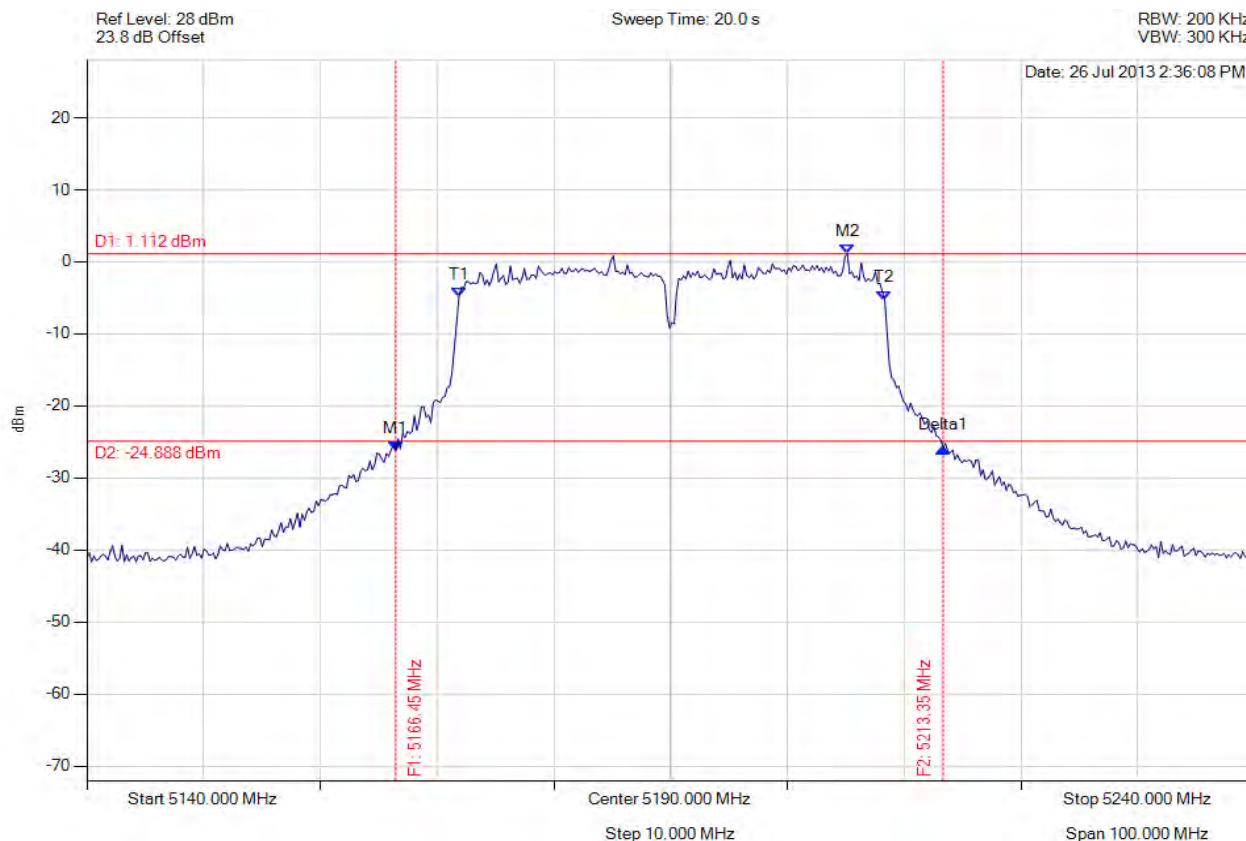


Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5166.453 MHz : -26.171 dBm M2 : 5205.130 MHz : 1.112 dBm Delta1 : 46.894 MHz : 0.370 dB T1 : 5171.864 MHz : -4.849 dBm T2 : 5208.337 MHz : -5.286 dBm OBW : 36.473 MHz	Measured 26 dB Bandwidth: 46.894 MHz Measured 99% Bandwidth: 36.473 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

**26 dB & 99% BANDWIDTH**

Variant: 802.11ac-40, Channel: 5190.00 MHz, Chain c, Temp: Ambient, Voltage: 5 Vdc

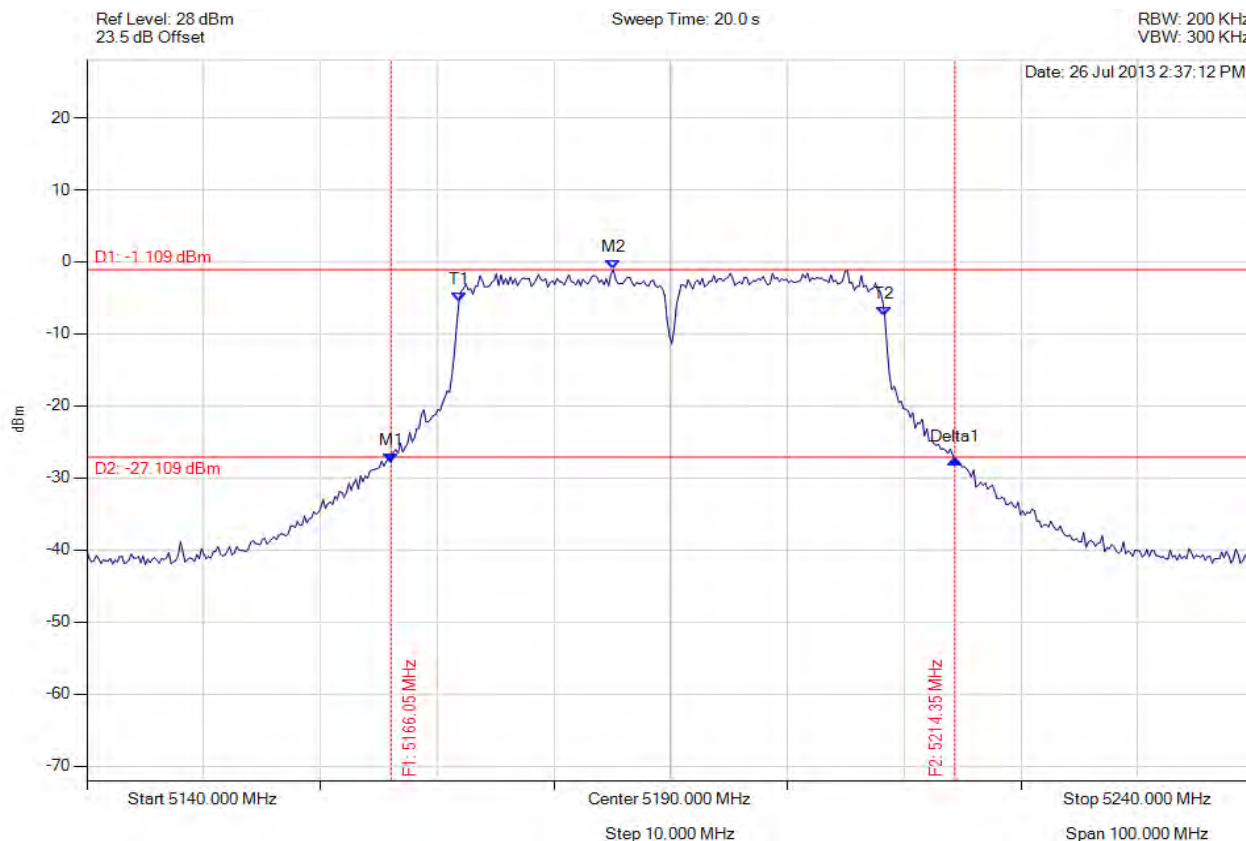

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5166.052 MHz : -27.830 dBm M2 : 5185.090 MHz : -1.109 dBm Delta1 : 48.297 MHz : 0.431 dB T1 : 5171.864 MHz : -5.522 dBm T2 : 5208.337 MHz : -7.536 dBm OBW : 36.473 MHz	Measured 26 dB Bandwidth: 48.297 MHz Measured 99% Bandwidth: 36.473 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11ac-40, Channel: 5230.00 MHz, Chain a, Temp: Ambient, Voltage: 5 Vdc

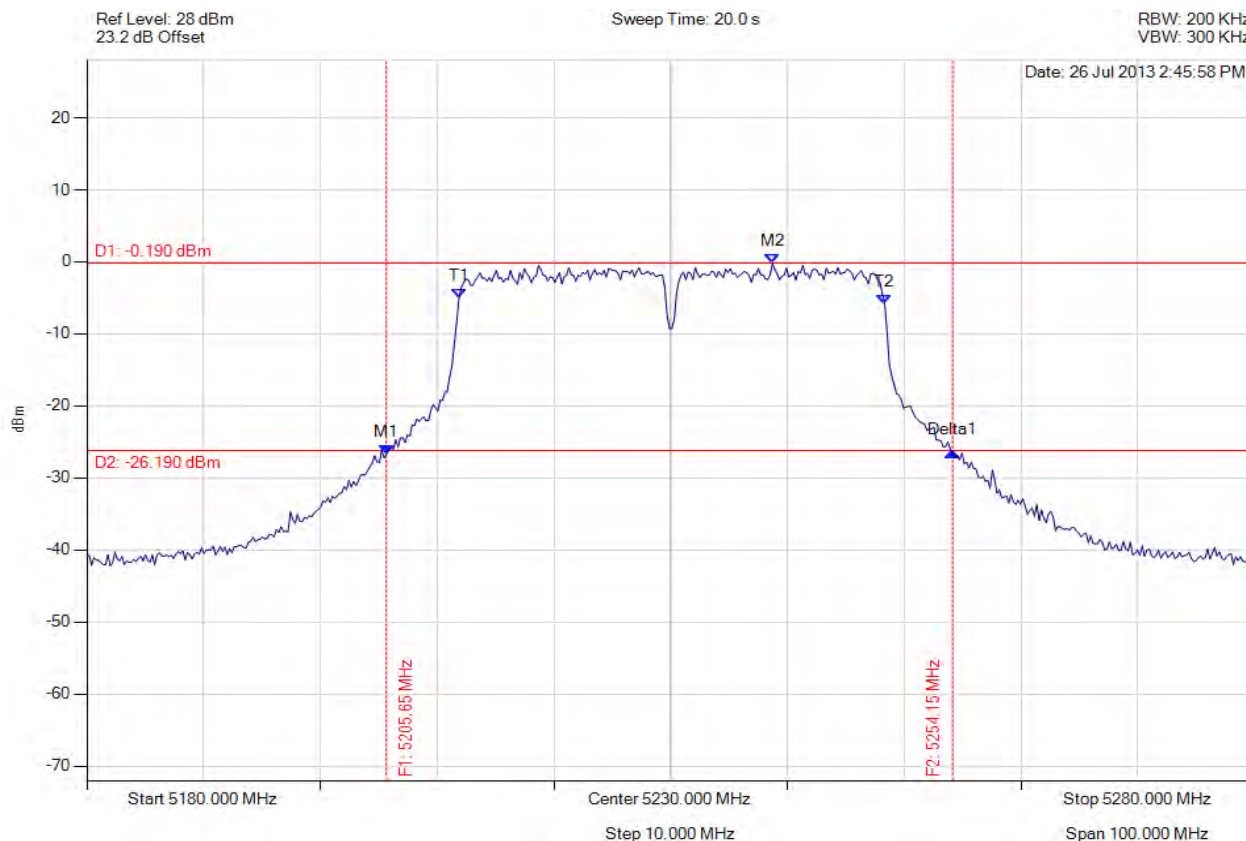

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5205.651 MHz : -26.712 dBm M2 : 5238.717 MHz : -0.190 dBm Delta1 : 48.497 MHz : 0.390 dB T1 : 5211.864 MHz : -5.089 dBm T2 : 5248.337 MHz : -5.892 dBm OBW : 36.473 MHz	Measured 26 dB Bandwidth: 48.497 MHz Measured 99% Bandwidth: 36.473 MHz

[Back to the Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**26 dB & 99% BANDWIDTH**

Variant: 802.11ac-40, Channel: 5230.00 MHz, Chain b, Temp: Ambient, Voltage: 5 Vdc

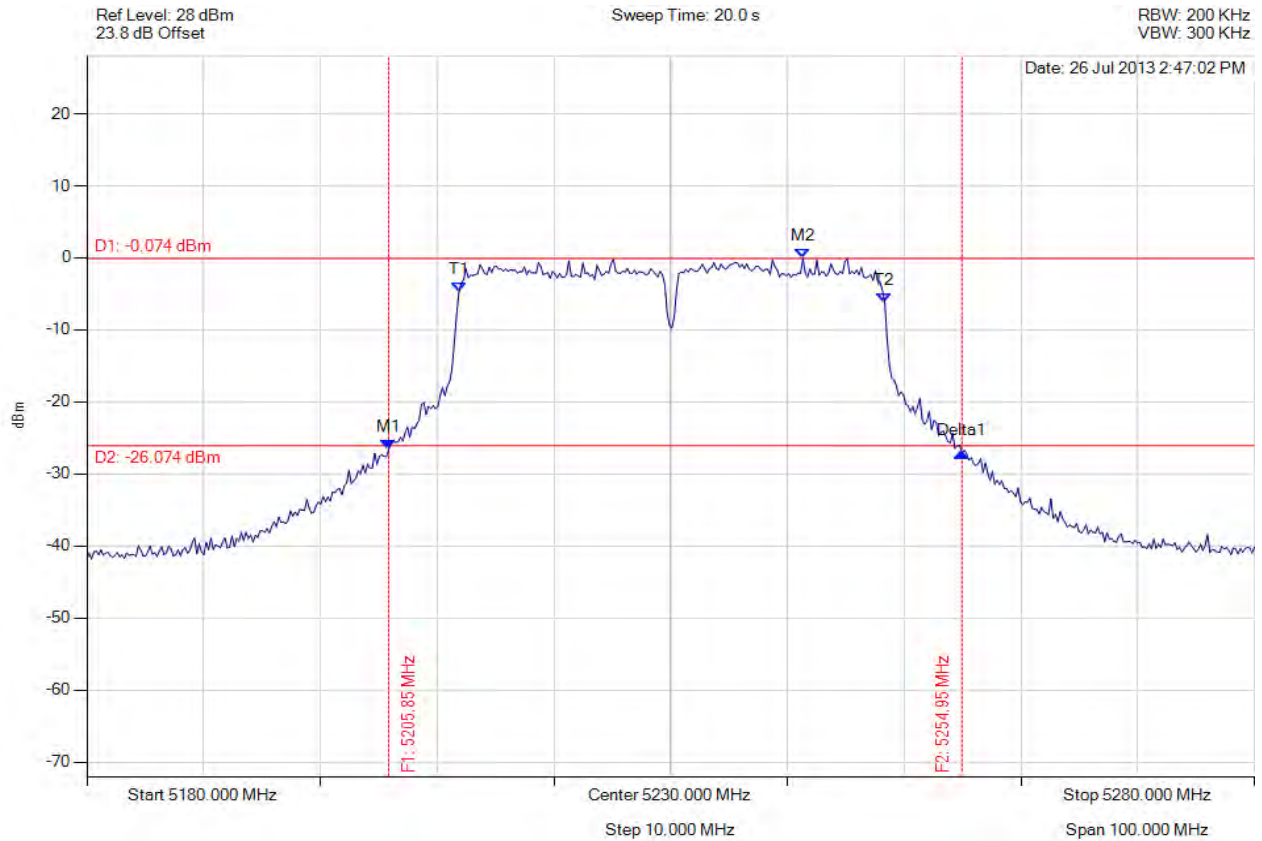

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5205.852 MHz : -26.590 dBm M2 : 5241.323 MHz : -0.074 dBm Delta1 : 49.098 MHz : -0.508 dB T1 : 5211.864 MHz : -4.688 dBm T2 : 5248.337 MHz : -6.212 dBm OBW : 36.473 MHz	Measured 26 dB Bandwidth: 49.098 MHz Measured 99% Bandwidth: 36.473 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11ac-40, Channel: 5230.00 MHz, Chain c, Temp: Ambient, Voltage: 5 Vdc

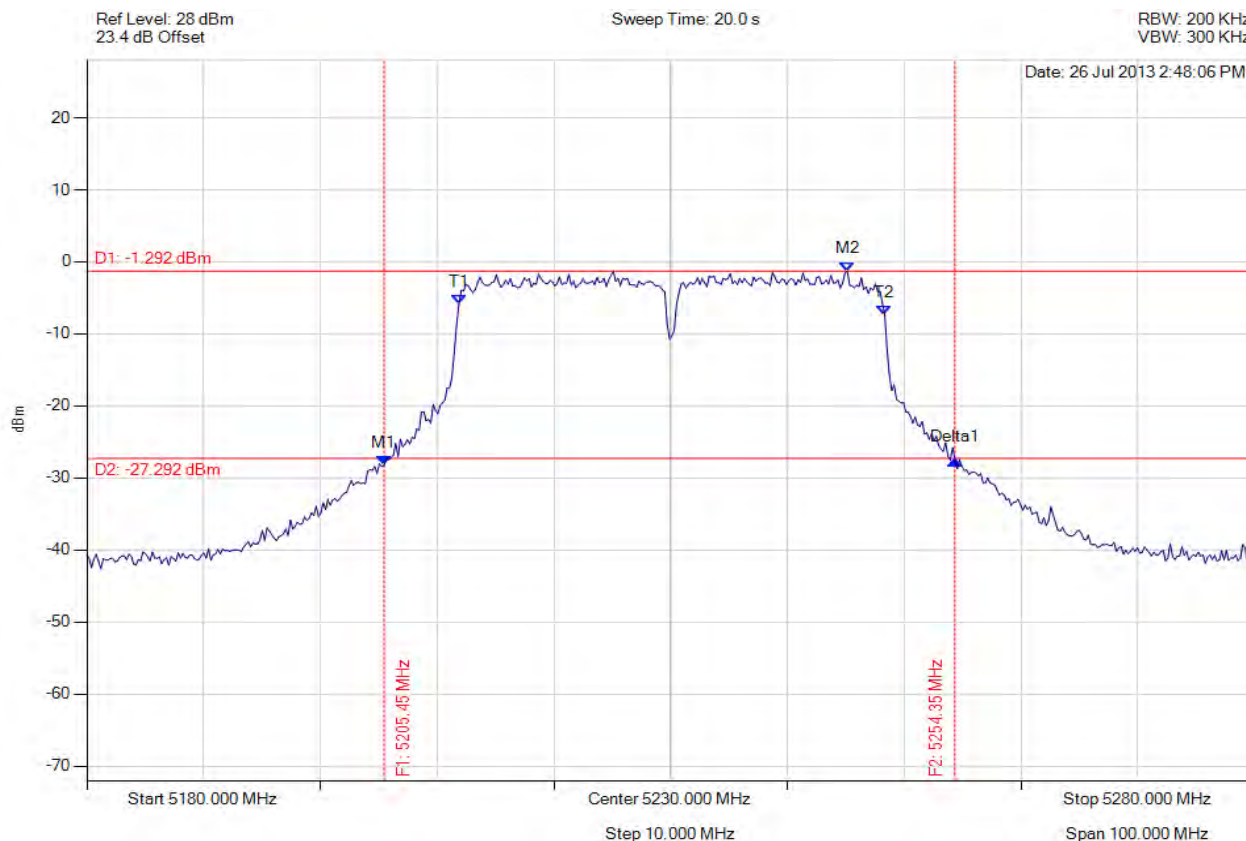

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5205.451 MHz : -28.286 dBm M2 : 5245.130 MHz : -1.292 dBm Delta1 : 48.898 MHz : 0.813 dB T1 : 5211.864 MHz : -5.819 dBm T2 : 5248.337 MHz : -7.444 dBm OBW : 36.473 MHz	Measured 26 dB Bandwidth: 48.898 MHz Measured 99% Bandwidth: 36.473 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11ac-80, Channel: 5210.00 MHz, Chain a, Temp: Ambient, Voltage: 5 Vdc

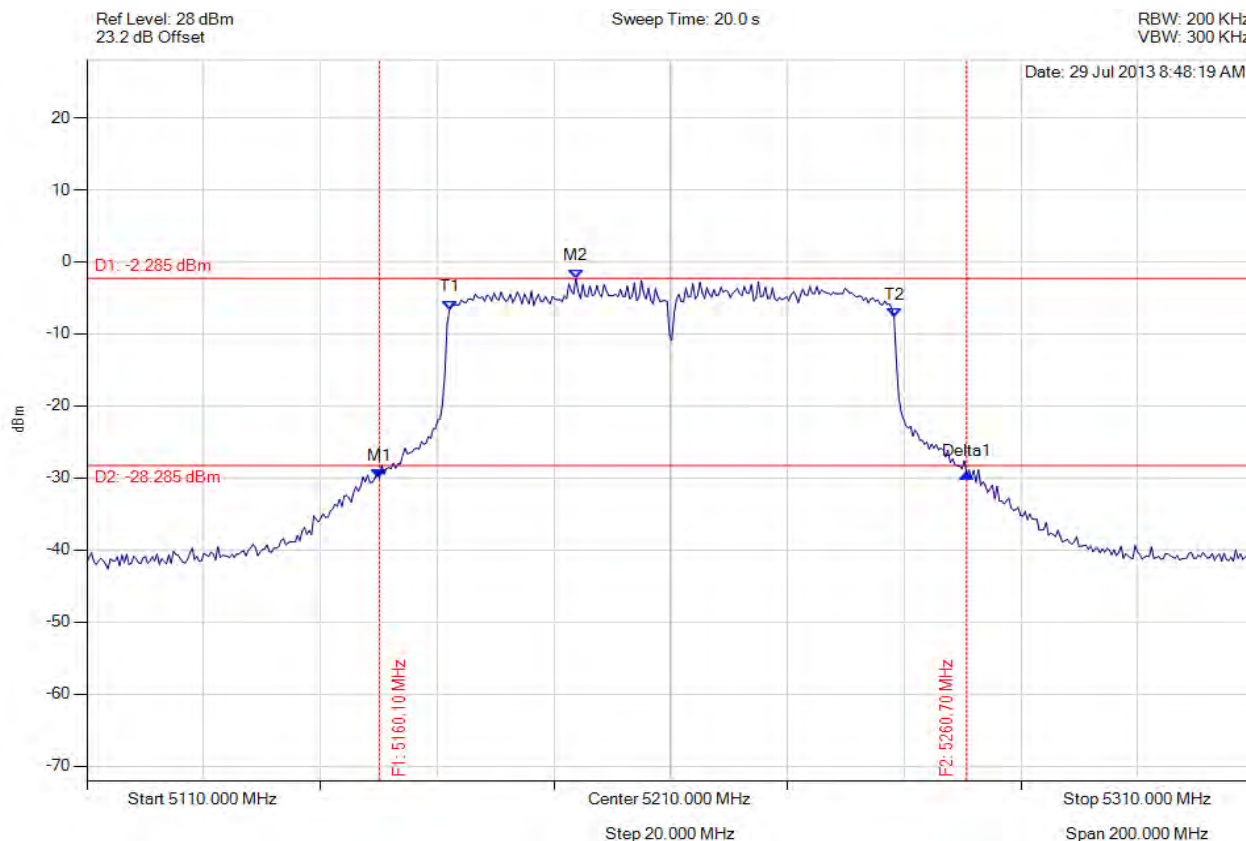

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5160.100 MHz : -30.033 dBm M2 : 5193.768 MHz : -2.285 dBm Delta1 : 100.601 MHz : 0.596 dB T1 : 5172.124 MHz : -6.633 dBm T2 : 5248.277 MHz : -7.698 dBm OBW : 76.152 MHz	Measured 26 dB Bandwidth: 100.601 MHz Measured 99% Bandwidth: 76.152 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11ac-80, Channel: 5210.00 MHz, Chain b, Temp: Ambient, Voltage: 5 Vdc

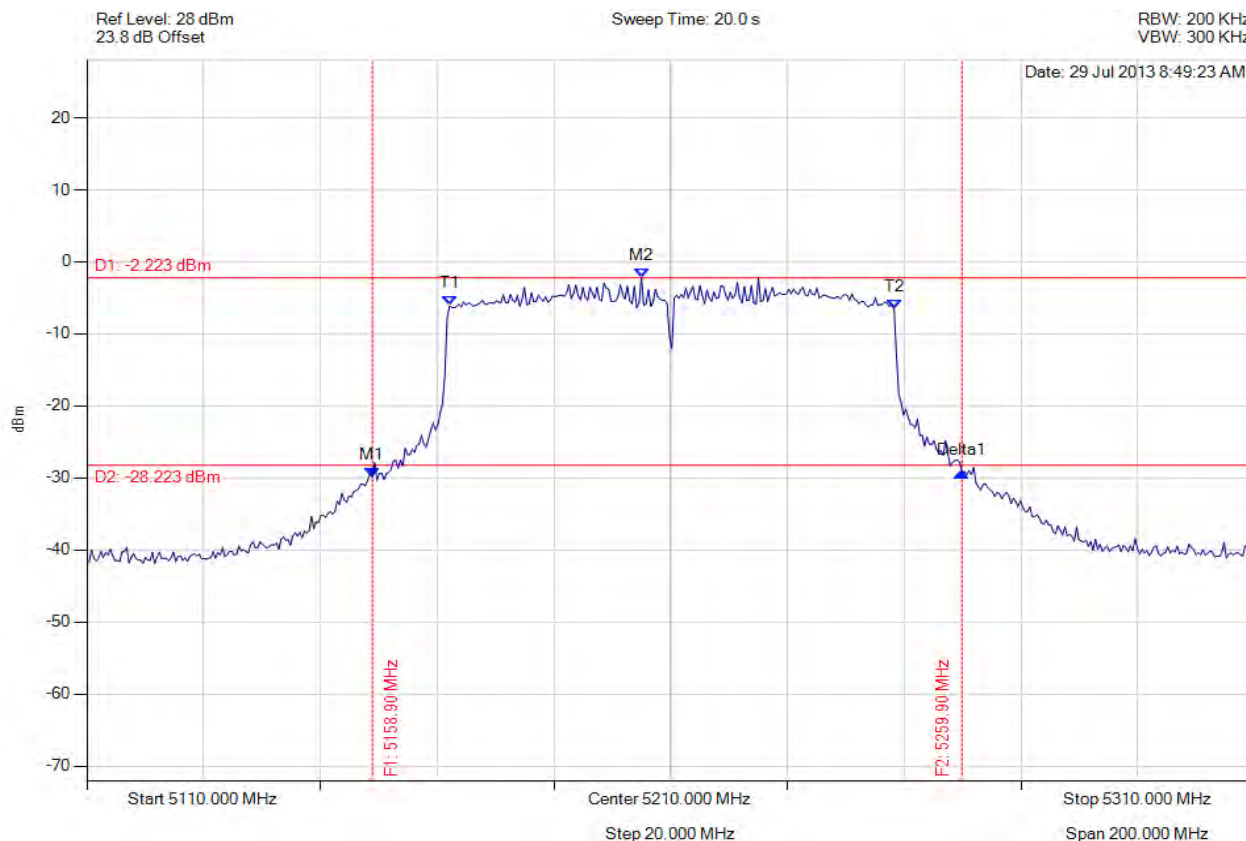

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5158.898 MHz : -29.870 dBm M2 : 5204.990 MHz : -2.223 dBm Delta1 : 101.002 MHz : 0.606 dB T1 : 5172.124 MHz : -6.106 dBm T2 : 5248.277 MHz : -6.478 dBm OBW : 76.152 MHz	Measured 26 dB Bandwidth: 101.002 MHz Measured 99% Bandwidth: 76.152 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11ac-80, Channel: 5210.00 MHz, Chain c, Temp: Ambient, Voltage: 5 Vdc

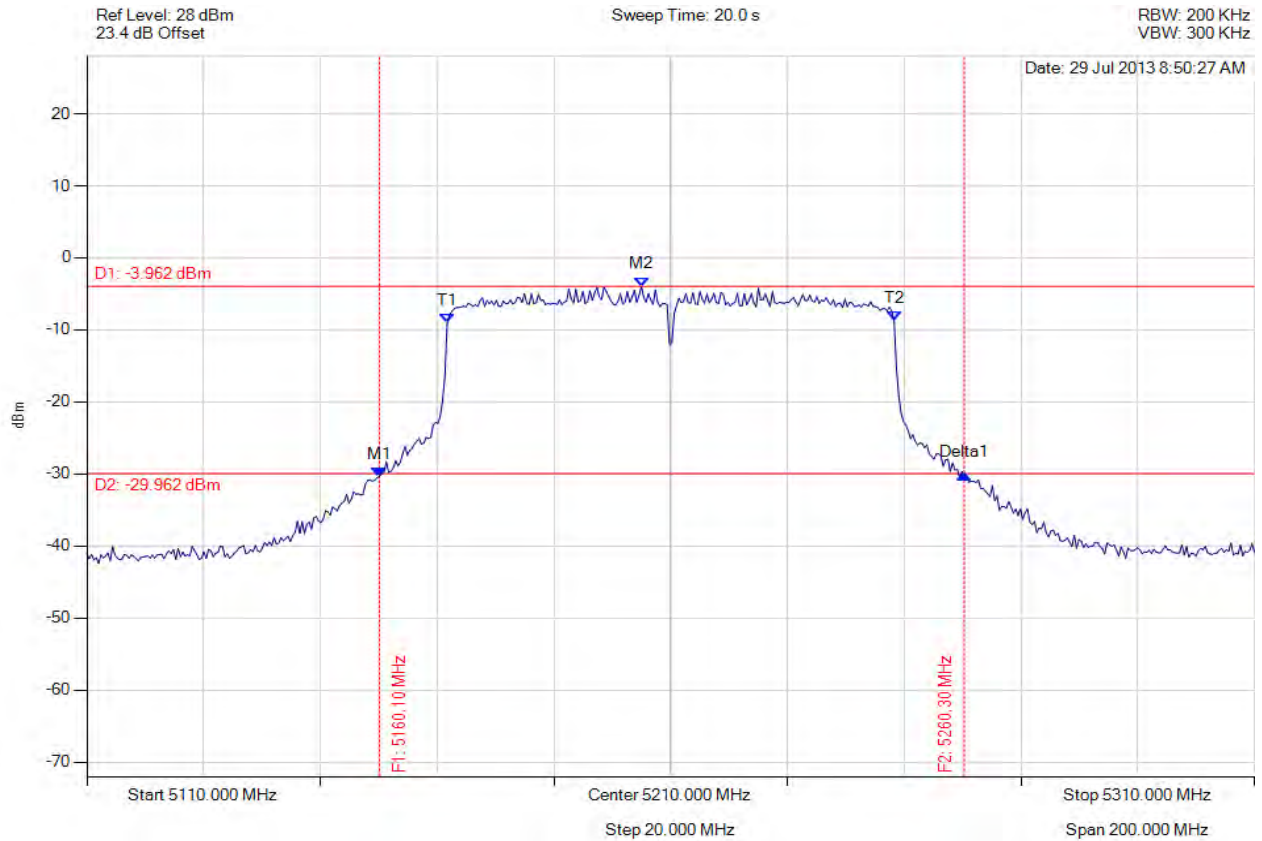

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5160.100 MHz : -30.377 dBm M2 : 5204.990 MHz : -3.962 dBm Delta1 : 100.200 MHz : 0.299 dB T1 : 5171.723 MHz : -9.083 dBm T2 : 5248.277 MHz : -8.727 dBm OBW : 76.553 MHz	Measured 26 dB Bandwidth: 100.200 MHz Measured 99% Bandwidth: 76.553 MHz

[Back to the Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**26 dB & 99% BANDWIDTH**

Variant: 802.11a, Channel: 5260.00 MHz, Chain a, Temp: Ambient, Voltage: 5 Vdc

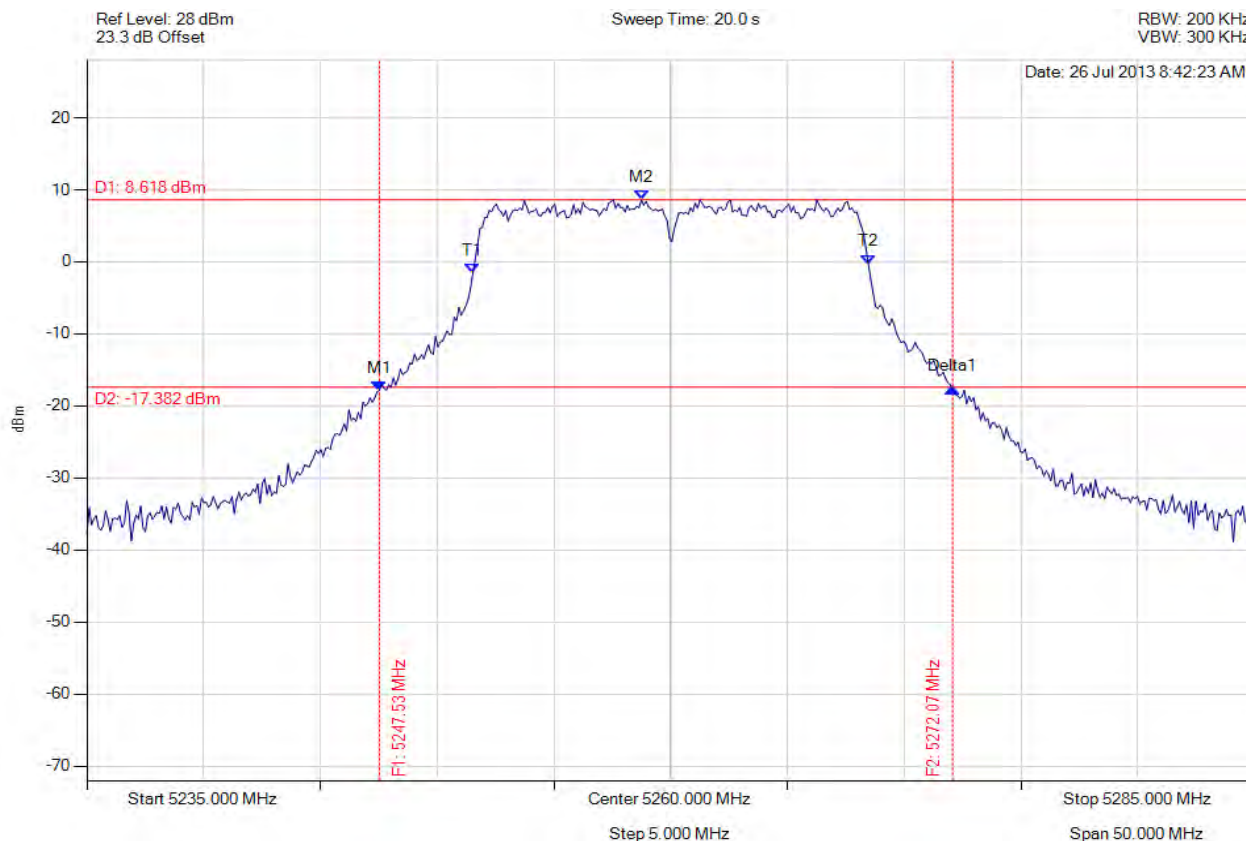

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5247.525 MHz : -17.847 dBm M2 : 5258.747 MHz : 8.618 dBm Delta1 : 24.549 MHz : 0.234 dB T1 : 5251.533 MHz : -1.532 dBm T2 : 5268.467 MHz : -0.283 dBm OBW : 16.934 MHz	Measured 26 dB Bandwidth: 24.549 MHz Measured 99% Bandwidth: 16.934 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 202 of 407



### 26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5260.00 MHz, Chain b, Temp: Ambient, Voltage: 5 Vdc

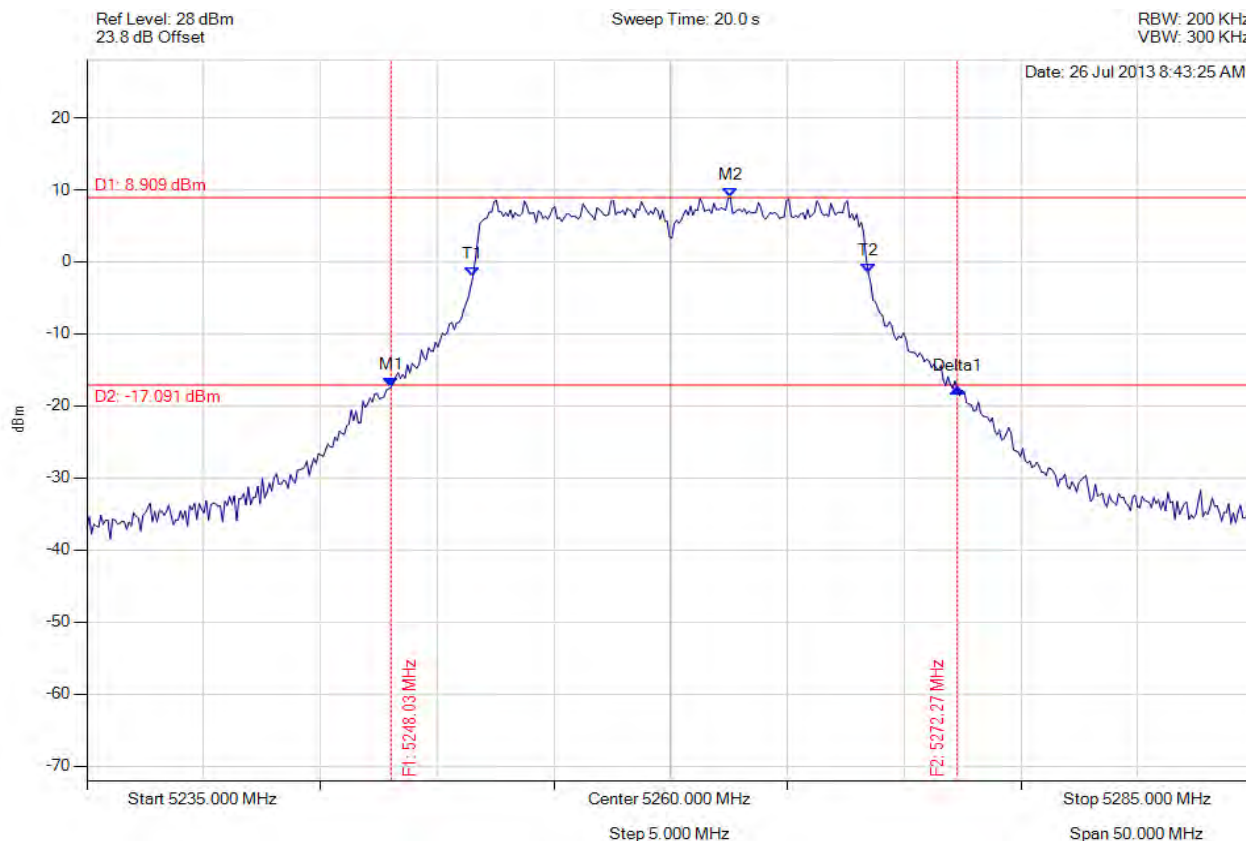

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5248.026 MHz : -17.409 dBm M2 : 5262.555 MHz : 8.909 dBm Delta1 : 24.248 MHz : -0.118 dB T1 : 5251.533 MHz : -2.034 dBm T2 : 5268.467 MHz : -1.603 dBm OBW : 16.934 MHz	Measured 26 dB Bandwidth: 24.248 MHz Measured 99% Bandwidth: 16.934 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 203 of 407



**26 dB & 99% BANDWIDTH**

Variant: 802.11a, Channel: 5260.00 MHz, Chain c, Temp: Ambient, Voltage: 5 Vdc

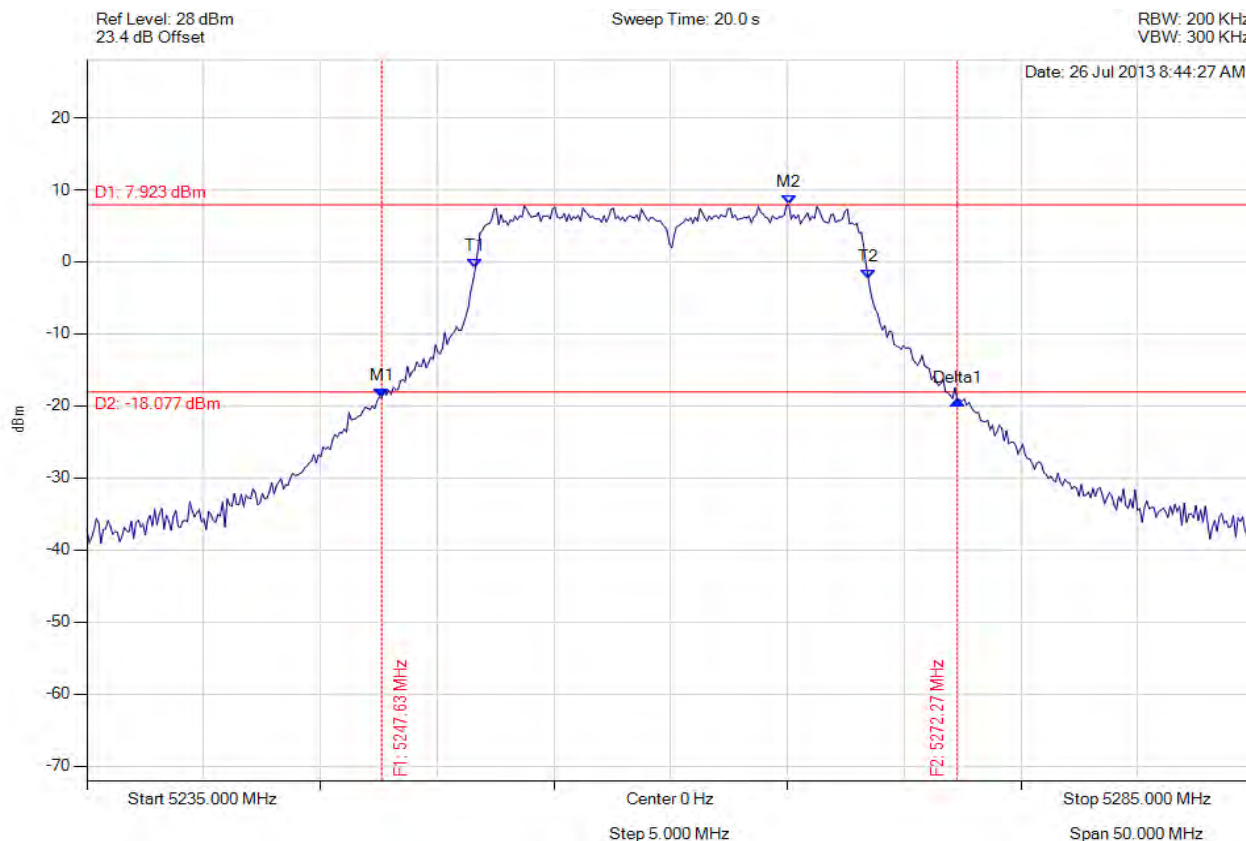

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5247.625 MHz : -18.933 dBm M2 : 5265.060 MHz : 7.923 dBm Delta1 : 24.649 MHz : -0.252 dB T1 : 5251.633 MHz : -0.889 dBm T2 : 5268.467 MHz : -2.354 dBm OBW : 16.834 MHz	Measured 26 dB Bandwidth: 24.649 MHz Measured 99% Bandwidth: 16.834 MHz

[Back to the Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**26 dB & 99% BANDWIDTH**

Variant: 802.11a, Channel: 5300.00 MHz, Chain a, Temp: Ambient, Voltage: 5 Vdc

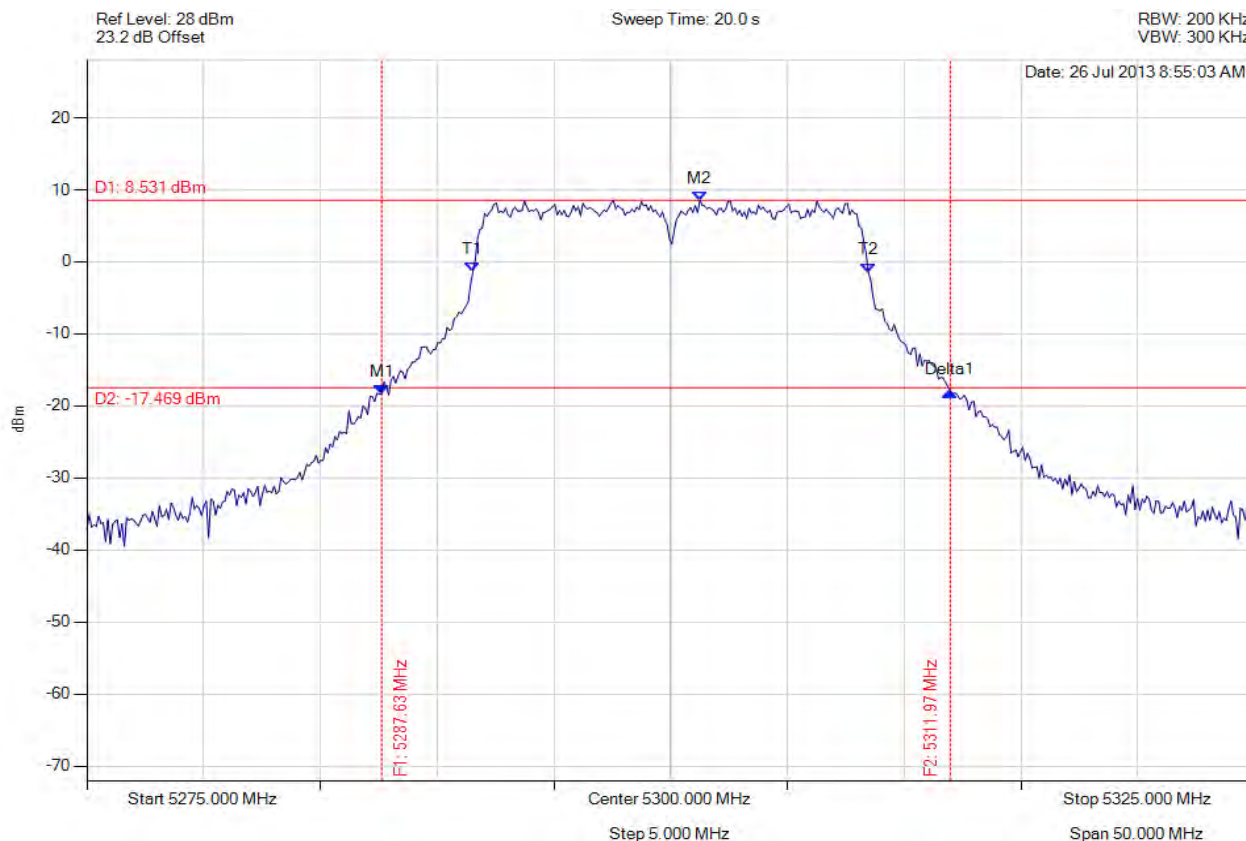

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5287.625 MHz : -18.312 dBm M2 : 5301.253 MHz : 8.531 dBm Delta1 : 24.349 MHz : 0.336 dB T1 : 5291.533 MHz : -1.388 dBm T2 : 5308.467 MHz : -1.453 dBm OBW : 16.934 MHz	Measured 26 dB Bandwidth: 24.349 MHz Measured 99% Bandwidth: 16.934 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11a, Channel: 5300.00 MHz, Chain b, Temp: Ambient, Voltage: 5 Vdc

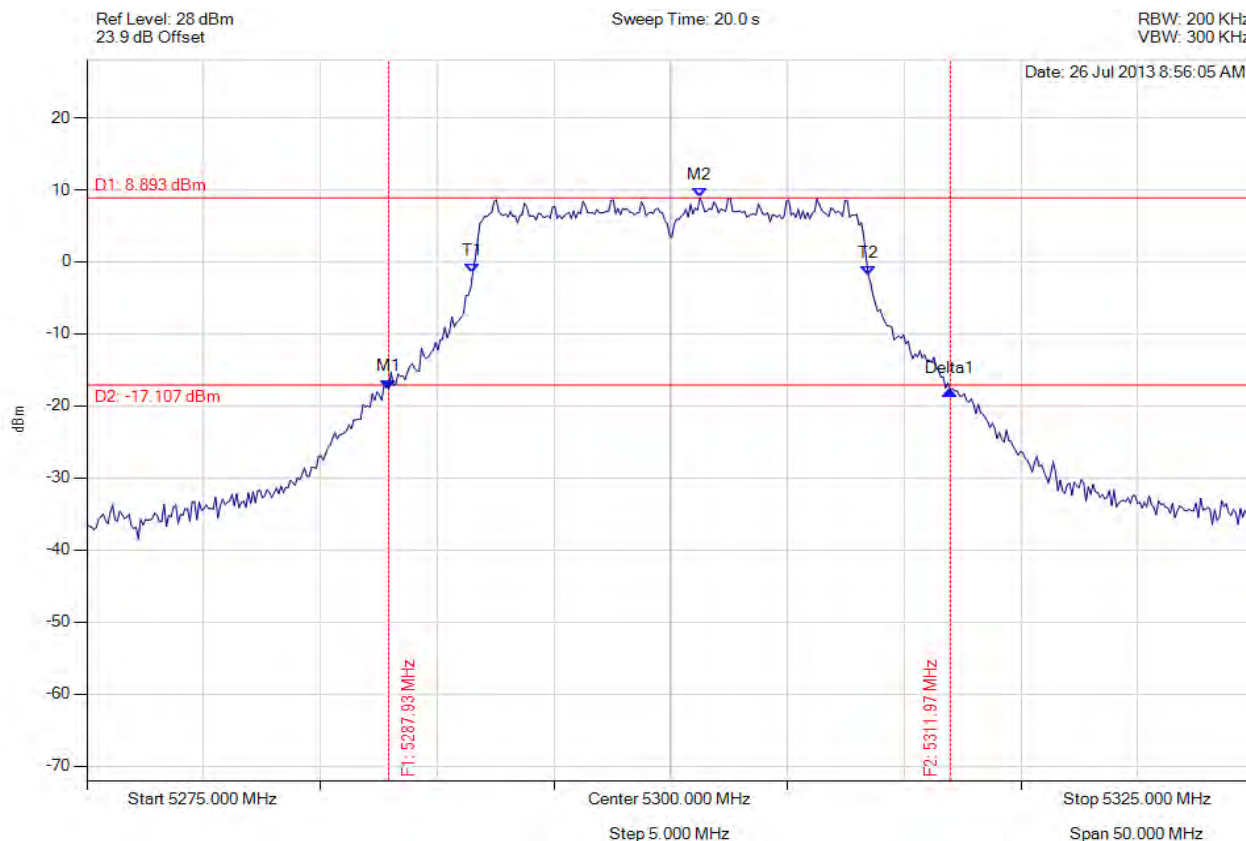

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5287.926 MHz : -17.629 dBm M2 : 5301.253 MHz : 8.893 dBm Delta1 : 24.048 MHz : -0.275 dB T1 : 5291.533 MHz : -1.473 dBm T2 : 5308.467 MHz : -1.845 dBm OBW : 16.934 MHz	Measured 26 dB Bandwidth: 24.048 MHz Measured 99% Bandwidth: 16.934 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11a, Channel: 5300.00 MHz, Chain c, Temp: Ambient, Voltage: 5 Vdc

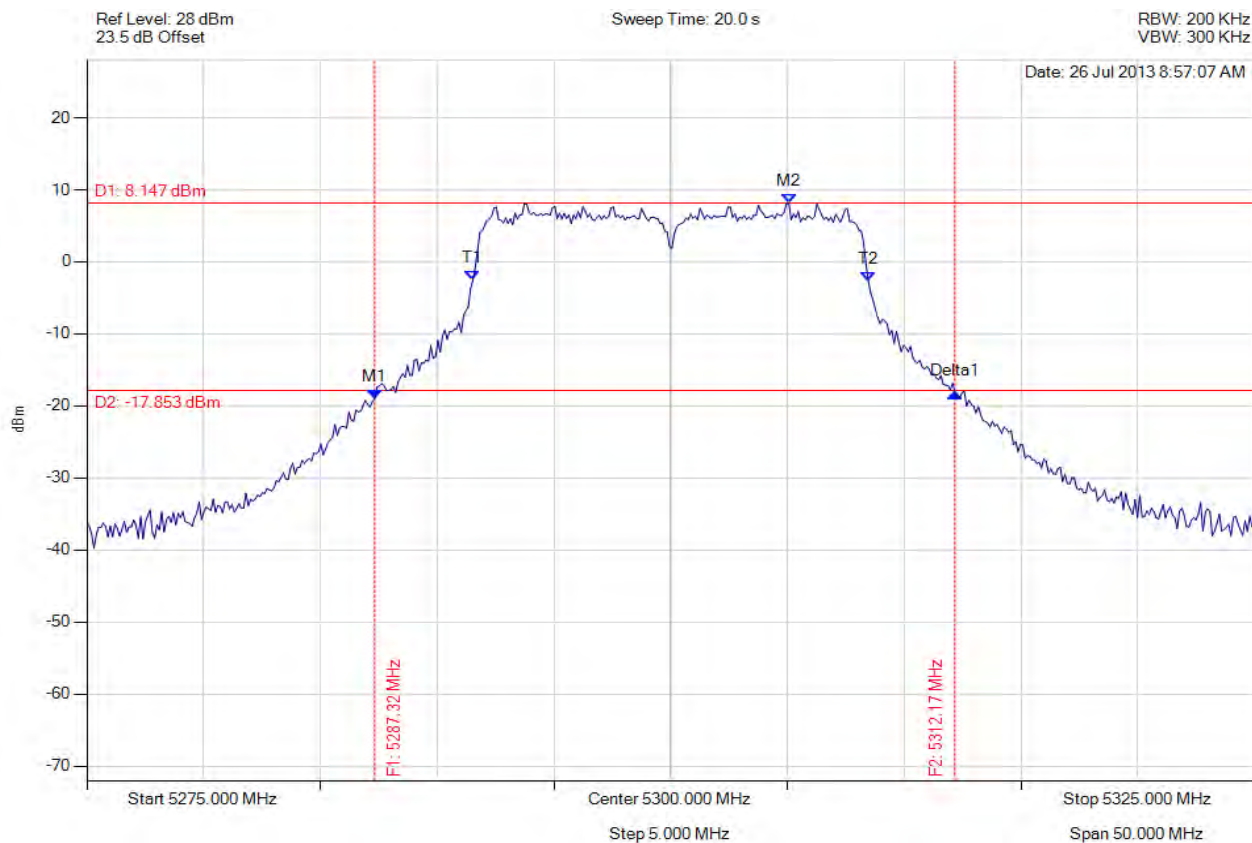

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5287.325 MHz : -19.010 dBm M2 : 5305.060 MHz : 8.147 dBm Delta1 : 24.850 MHz : 0.866 dB T1 : 5291.533 MHz : -2.561 dBm T2 : 5308.467 MHz : -2.720 dBm OBW : 16.934 MHz	Measured 26 dB Bandwidth: 24.850 MHz Measured 99% Bandwidth: 16.934 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11a, Channel: 5320.00 MHz, Chain a, Temp: Ambient, Voltage: 5 Vdc

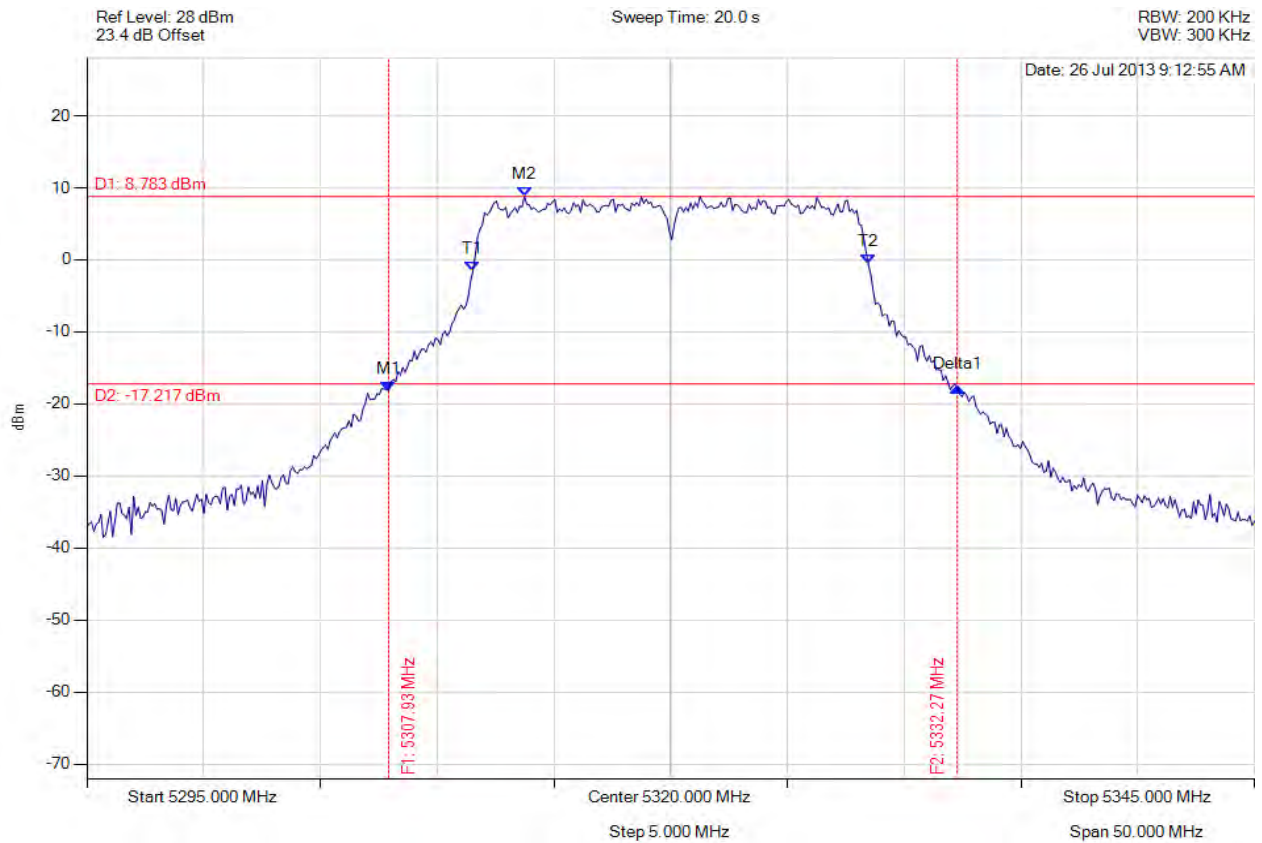

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5307.926 MHz : -18.150 dBm M2 : 5313.737 MHz : 8.783 dBm Delta1 : 24.349 MHz : 0.523 dB T1 : 5311.533 MHz : -1.567 dBm T2 : 5328.467 MHz : -0.609 dBm OBW : 16.934 MHz	Measured 26 dB Bandwidth: 24.349 MHz Measured 99% Bandwidth: 16.934 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variants: 802.11a, Channel: 5320.00 MHz, Chain b, Temp: Ambient, Voltage: 5 Vdc

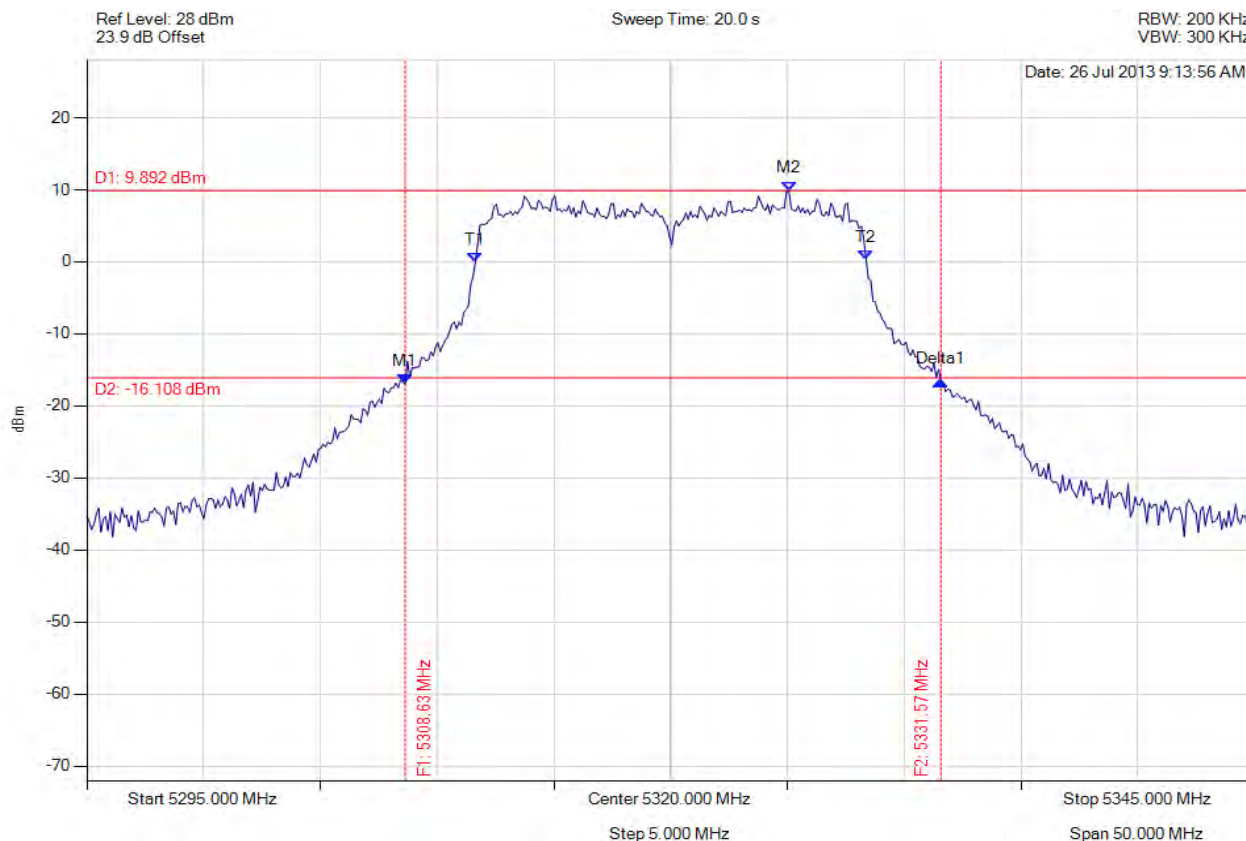

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5308.627 MHz : -16.950 dBm M2 : 5325.060 MHz : 9.892 dBm Delta1 : 22.946 MHz : 0.388 dB T1 : 5311.633 MHz : -0.062 dBm T2 : 5328.367 MHz : 0.341 dBm OBW : 16.733 MHz	Measured 26 dB Bandwidth: 22.946 MHz Measured 99% Bandwidth: 16.733 MHz

[Back to the Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**26 dB & 99% BANDWIDTH**

Variant: 802.11a, Channel: 5320.00 MHz, Chain c, Temp: Ambient, Voltage: 5 Vdc

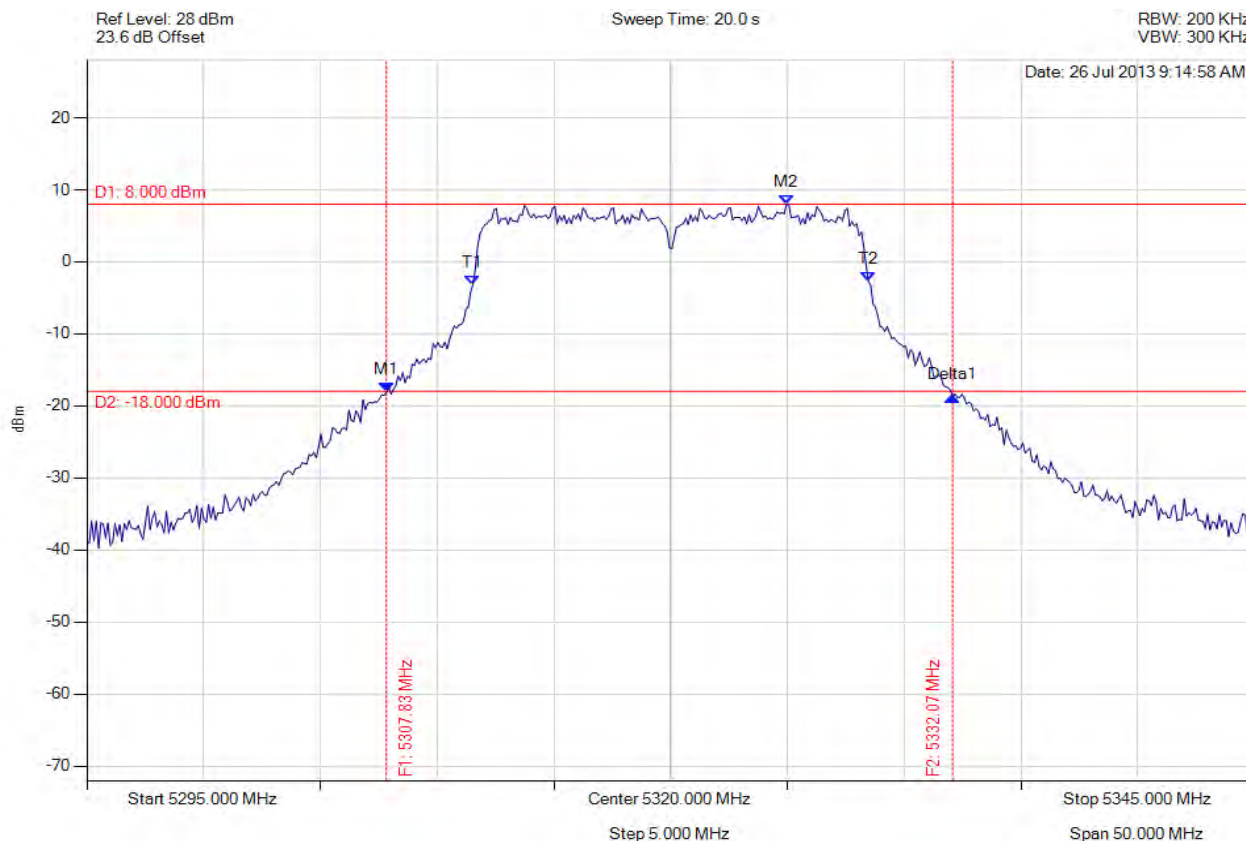

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5307.826 MHz : -18.101 dBm M2 : 5324.960 MHz : 8.000 dBm Delta1 : 24.248 MHz : -0.610 dB T1 : 5311.533 MHz : -3.177 dBm T2 : 5328.467 MHz : -2.685 dBm OBW : 16.934 MHz	Measured 26 dB Bandwidth: 24.248 MHz Measured 99% Bandwidth: 16.934 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-20, Channel: 5260.00 MHz, Chain a, Temp: Ambient, Voltage: 5 Vdc

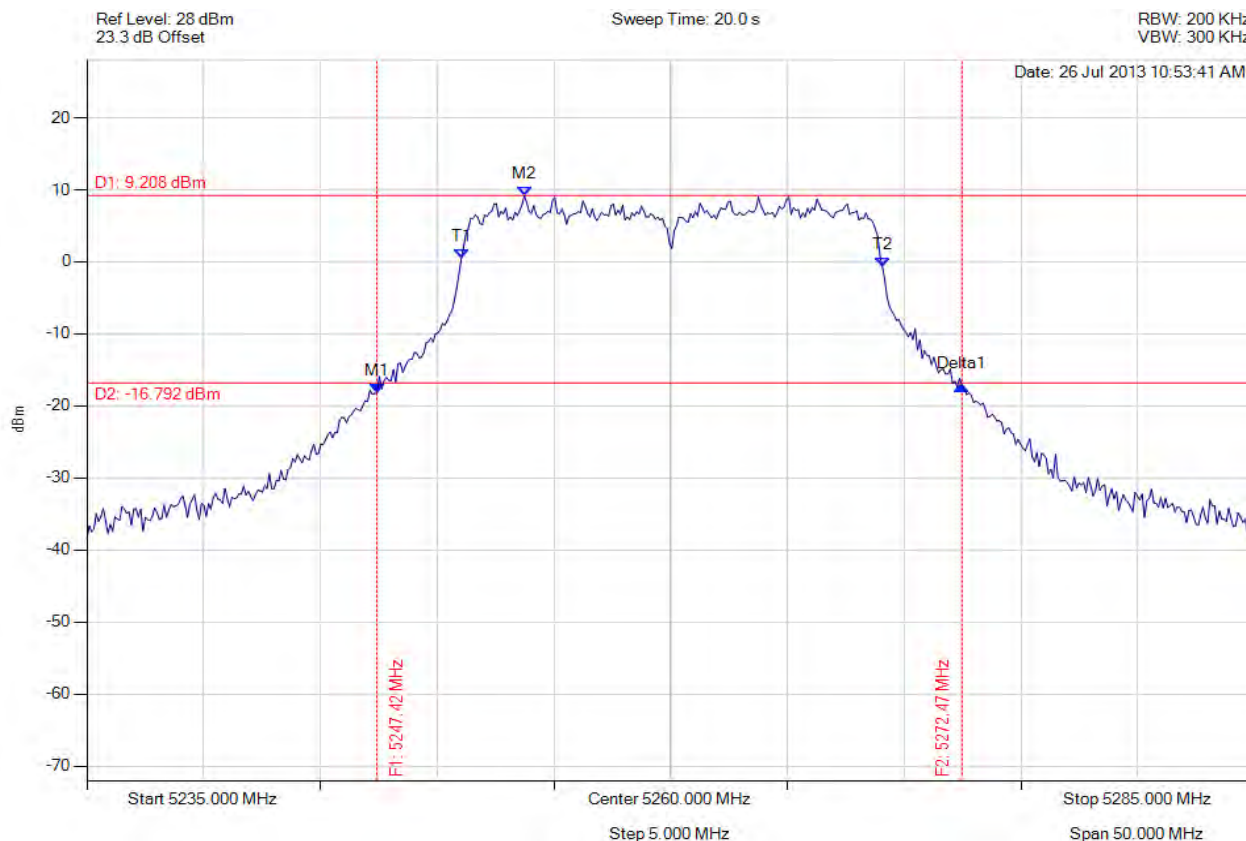

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5247.425 MHz : -18.186 dBm M2 : 5253.737 MHz : 9.208 dBm Delta1 : 25.050 MHz : 1.021 dB T1 : 5251.032 MHz : 0.426 dBm T2 : 5269.068 MHz : -0.647 dBm OBW : 18.036 MHz	Measured 26 dB Bandwidth: 25.050 MHz Measured 99% Bandwidth: 18.036 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-20, Channel: 5260.00 MHz, Chain b, Temp: Ambient, Voltage: 5 Vdc

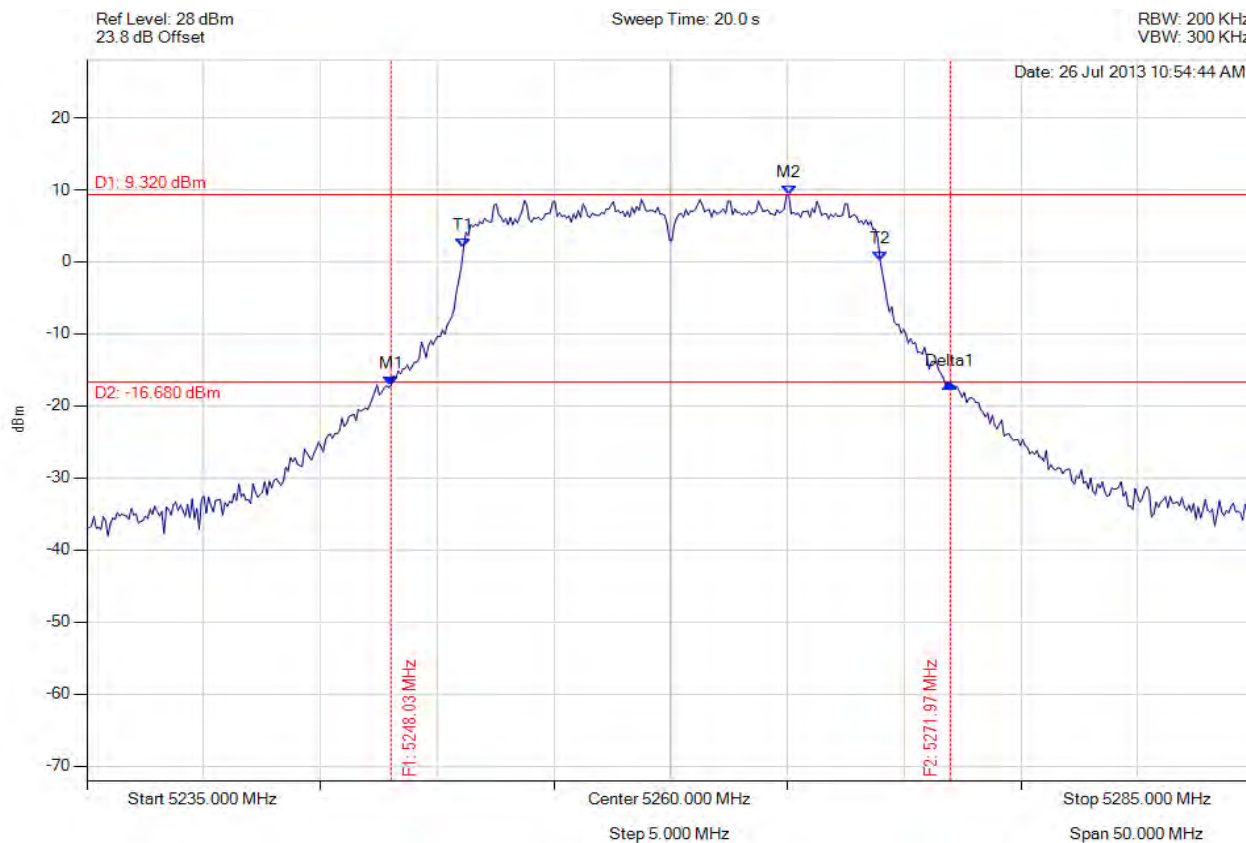

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5248.026 MHz : -17.224 dBm M2 : 5265.060 MHz : 9.320 dBm Delta1 : 23.948 MHz : 0.415 dB T1 : 5251.132 MHz : 2.009 dBm T2 : 5268.968 MHz : 0.201 dBm OBW : 17.836 MHz	Measured 26 dB Bandwidth: 23.948 MHz Measured 99% Bandwidth: 17.836 MHz

[Back to the Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-20, Channel: 5260.00 MHz, Chain c, Temp: Ambient, Voltage: 5 Vdc

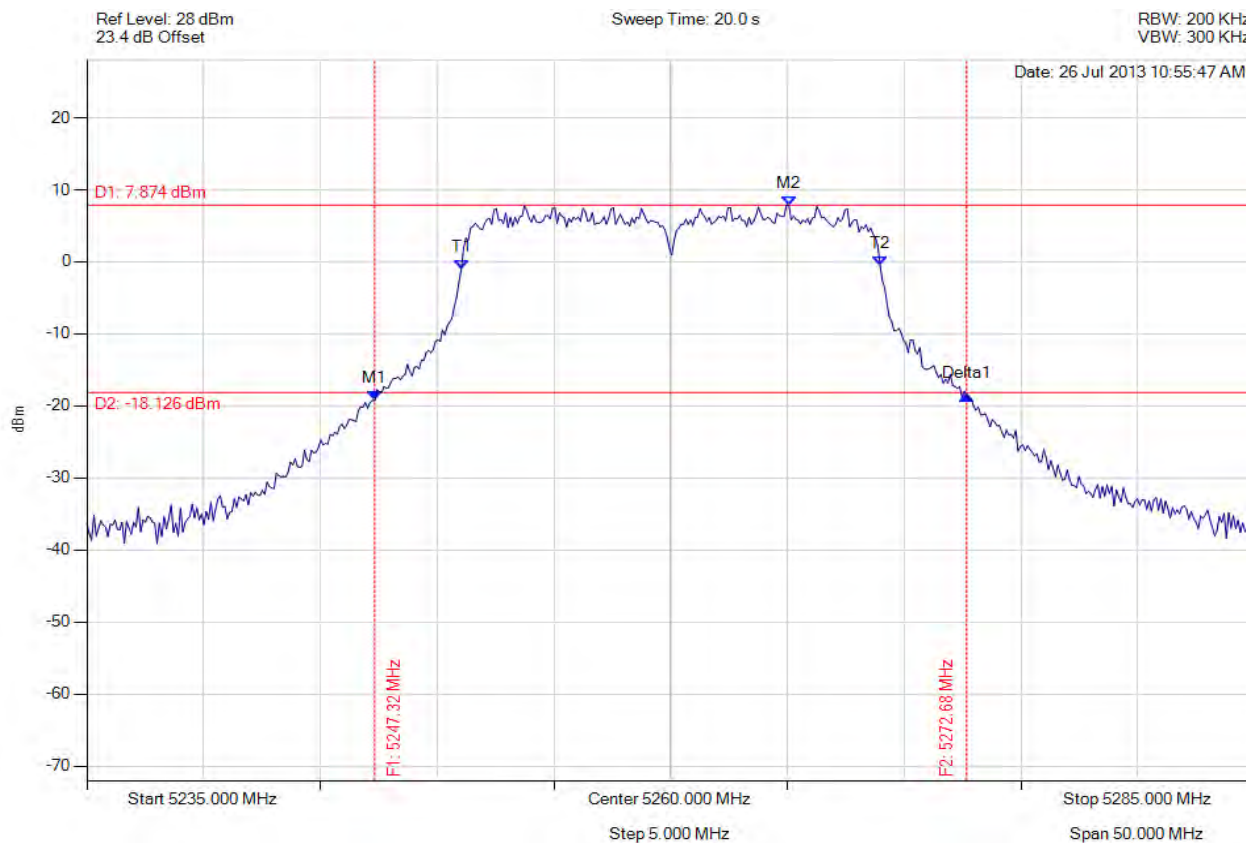

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5247.325 MHz : -19.252 dBm M2 : 5265.060 MHz : 7.874 dBm Delta1 : 25.351 MHz : 0.757 dB T1 : 5251.032 MHz : -1.056 dBm T2 : 5268.968 MHz : -0.501 dBm OBW : 17.936 MHz	Measured 26 dB Bandwidth: 25.351 MHz Measured 99% Bandwidth: 17.936 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-20, Channel: 5300.00 MHz, Chain a, Temp: Ambient, Voltage: 5 Vdc

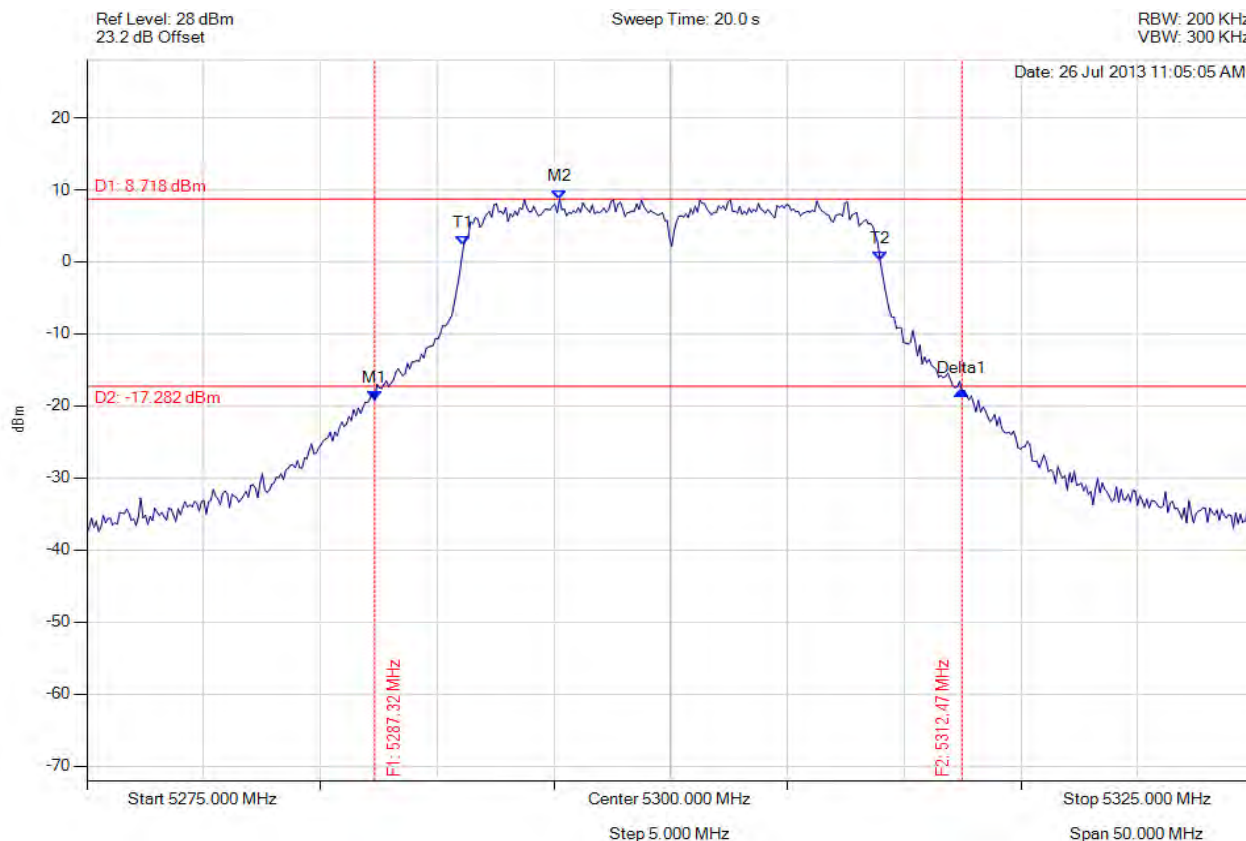

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5287.325 MHz : -19.254 dBm M2 : 5295.240 MHz : 8.718 dBm Delta1 : 25.150 MHz : 1.332 dB T1 : 5291.132 MHz : 2.237 dBm T2 : 5308.968 MHz : 0.156 dBm OBW : 17.836 MHz	Measured 26 dB Bandwidth : 25.150 MHz Measured 99% Bandwidth : 17.836 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-20, Channel: 5300.00 MHz, Chain b, Temp: Ambient, Voltage: 5 Vdc

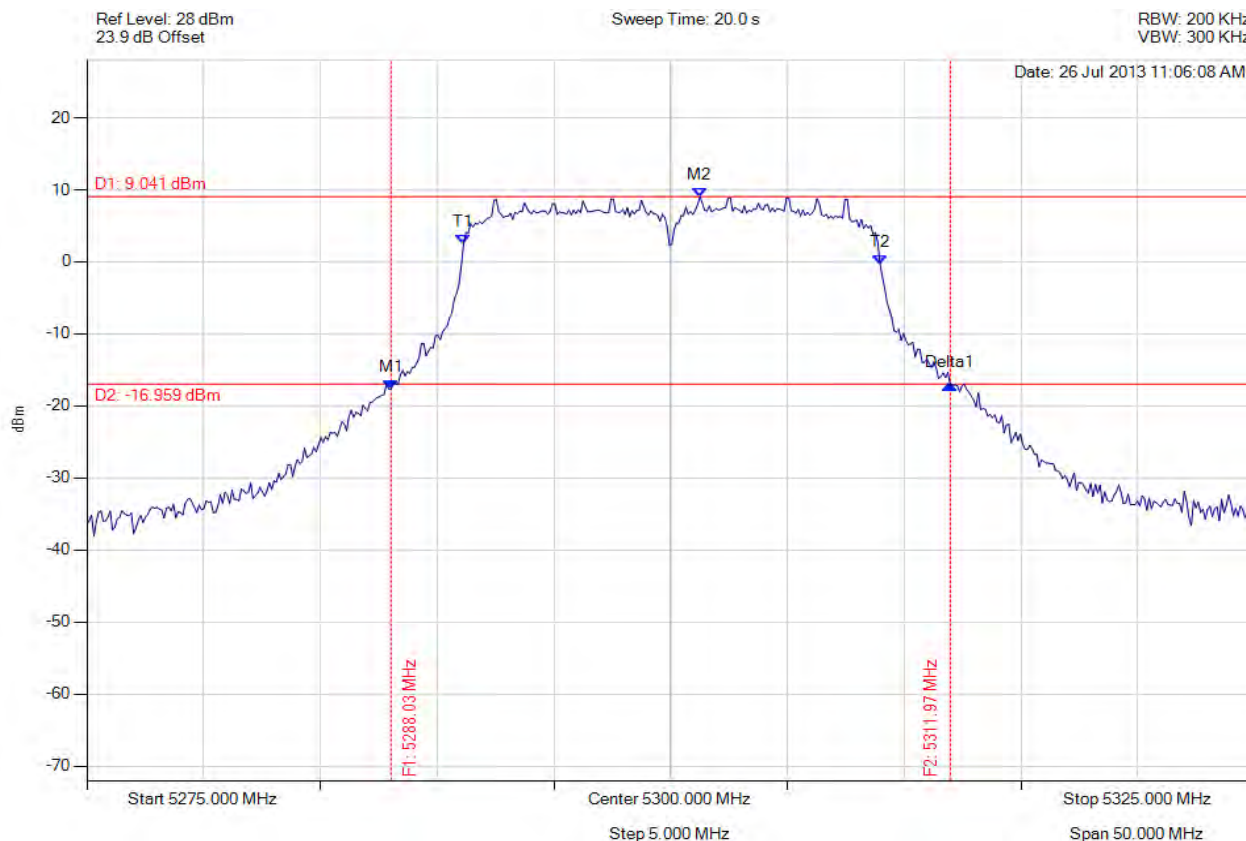

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5288.026 MHz : -17.696 dBm M2 : 5301.253 MHz : 9.041 dBm Delta1 : 23.948 MHz : 0.596 dB T1 : 5291.132 MHz : 2.476 dBm T2 : 5308.968 MHz : -0.322 dBm OBW : 17.836 MHz	Measured 26 dB Bandwidth: 23.948 MHz Measured 99% Bandwidth: 17.836 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-20, Channel: 5300.00 MHz, Chain c, Temp: Ambient, Voltage: 5 Vdc

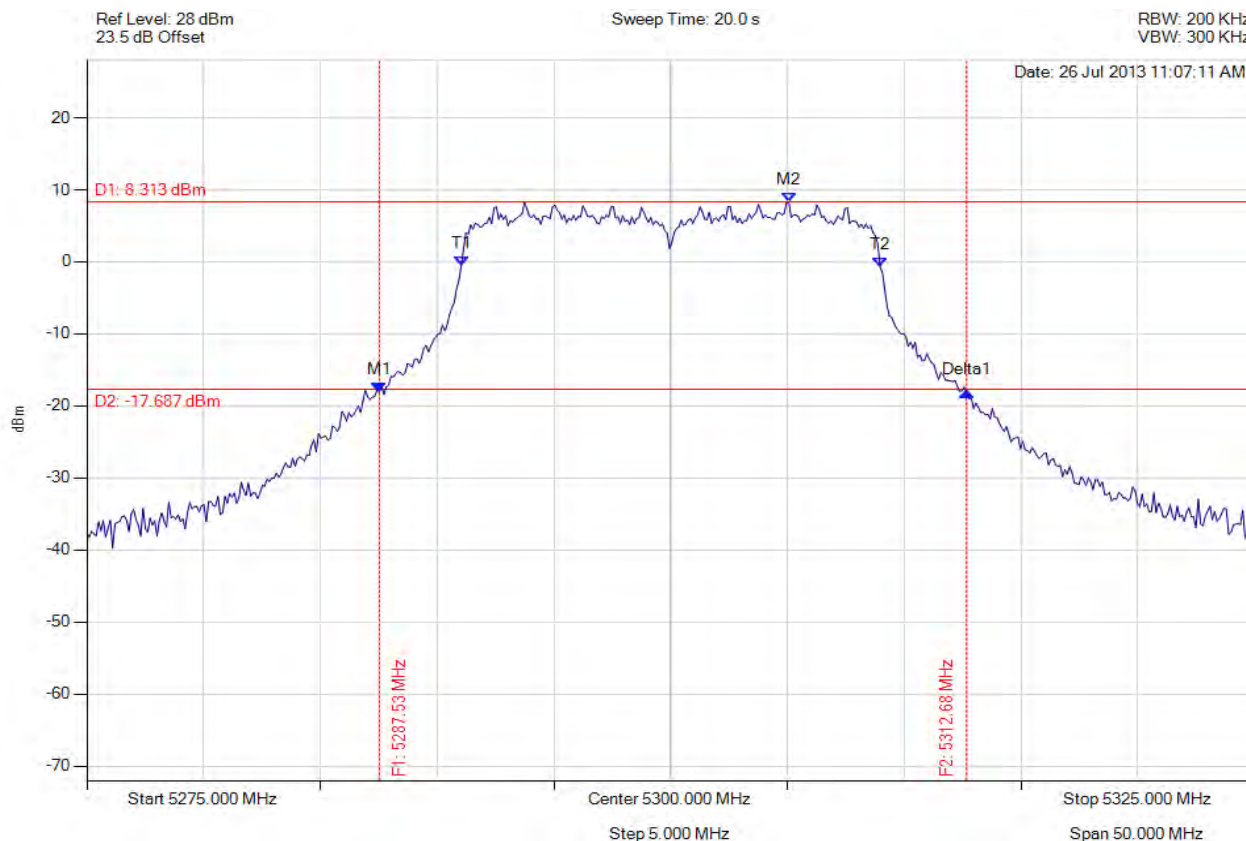

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5287.525 MHz : -18.036 dBm M2 : 5305.060 MHz : 8.313 dBm Delta1 : 25.150 MHz : -0.067 dB T1 : 5291.032 MHz : -0.511 dBm T2 : 5308.968 MHz : -0.690 dBm OBW : 17.936 MHz	Measured 26 dB Bandwidth: 25.150 MHz Measured 99% Bandwidth: 17.936 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-20, Channel: 5320.00 MHz, Chain a, Temp: Ambient, Voltage: 5 Vdc

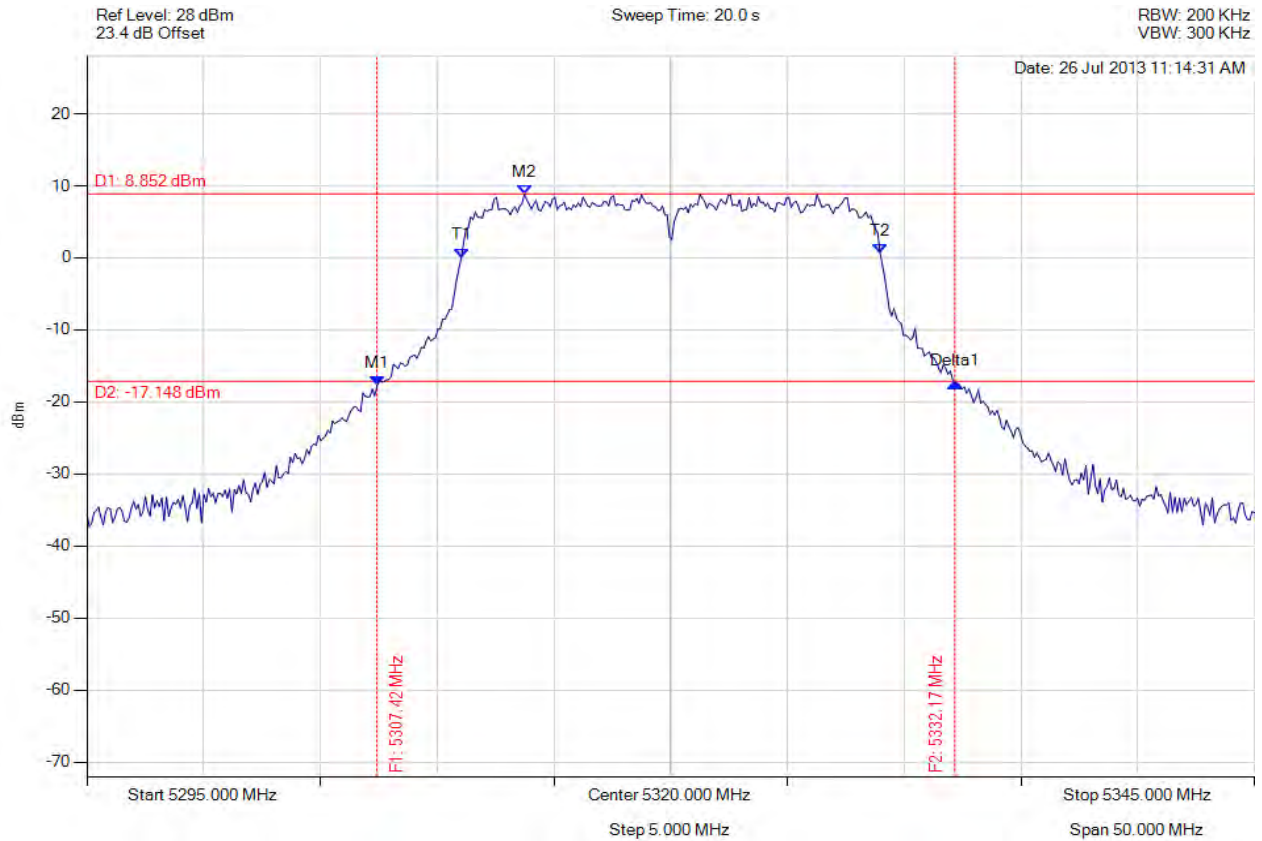

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5307.425 MHz : -17.786 dBm M2 : 5313.737 MHz : 8.852 dBm Delta1 : 24.749 MHz : 0.474 dB T1 : 5311.032 MHz : 0.048 dBm T2 : 5328.968 MHz : 0.622 dBm OBW : 17.936 MHz	Measured 26 dB Bandwidth: 24.749 MHz Measured 99% Bandwidth: 17.936 MHz

[Back to the Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-20, Channel: 5320.00 MHz, Chain b, Temp: Ambient, Voltage: 5 Vdc

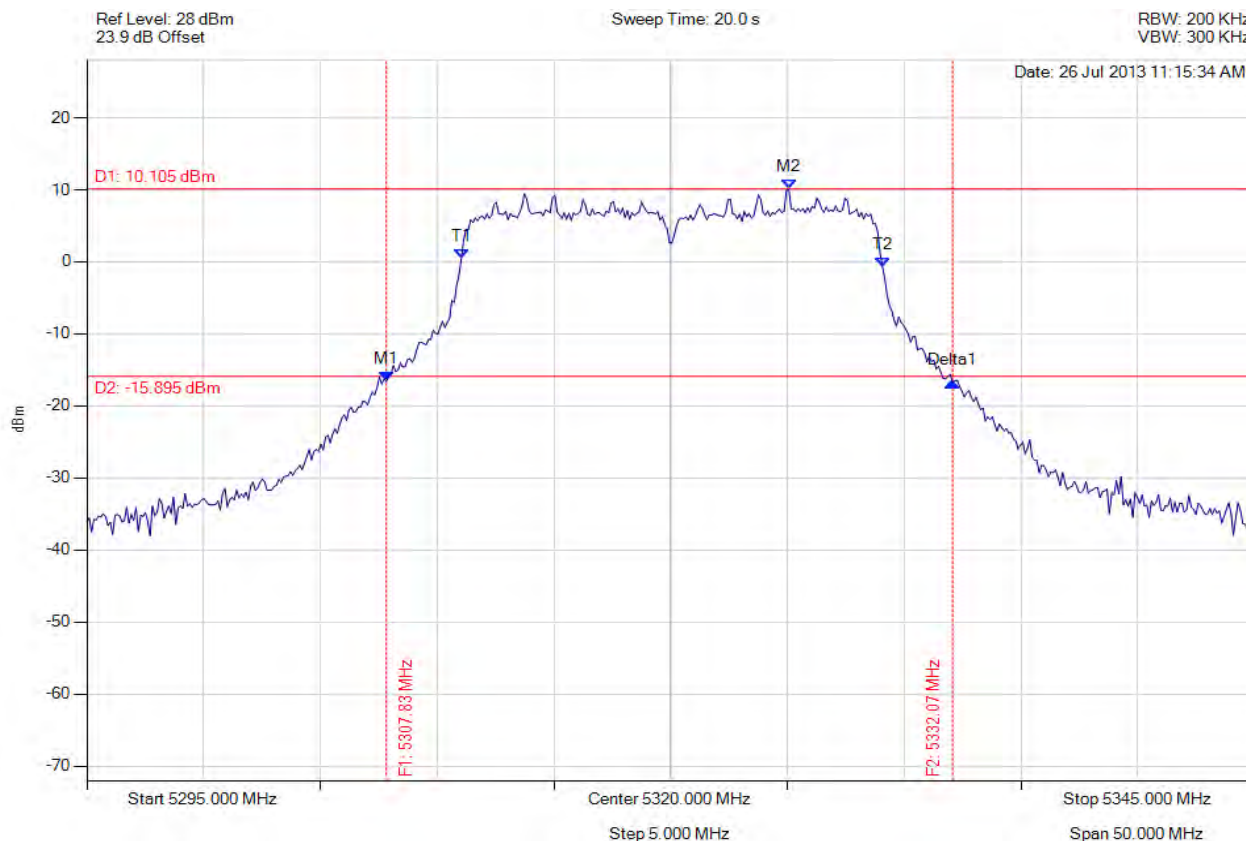

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5307.826 MHz : -16.622 dBm M2 : 5325.060 MHz : 10.105 dBm Delta1 : 24.248 MHz : -0.157 dB T1 : 5311.032 MHz : 0.406 dBm T2 : 5329.068 MHz : -0.643 dBm OBW : 18.036 MHz	Measured 26 dB Bandwidth: 24.248 MHz Measured 99% Bandwidth: 18.036 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-20, Channel: 5320.00 MHz, Chain c, Temp: Ambient, Voltage: 5 Vdc

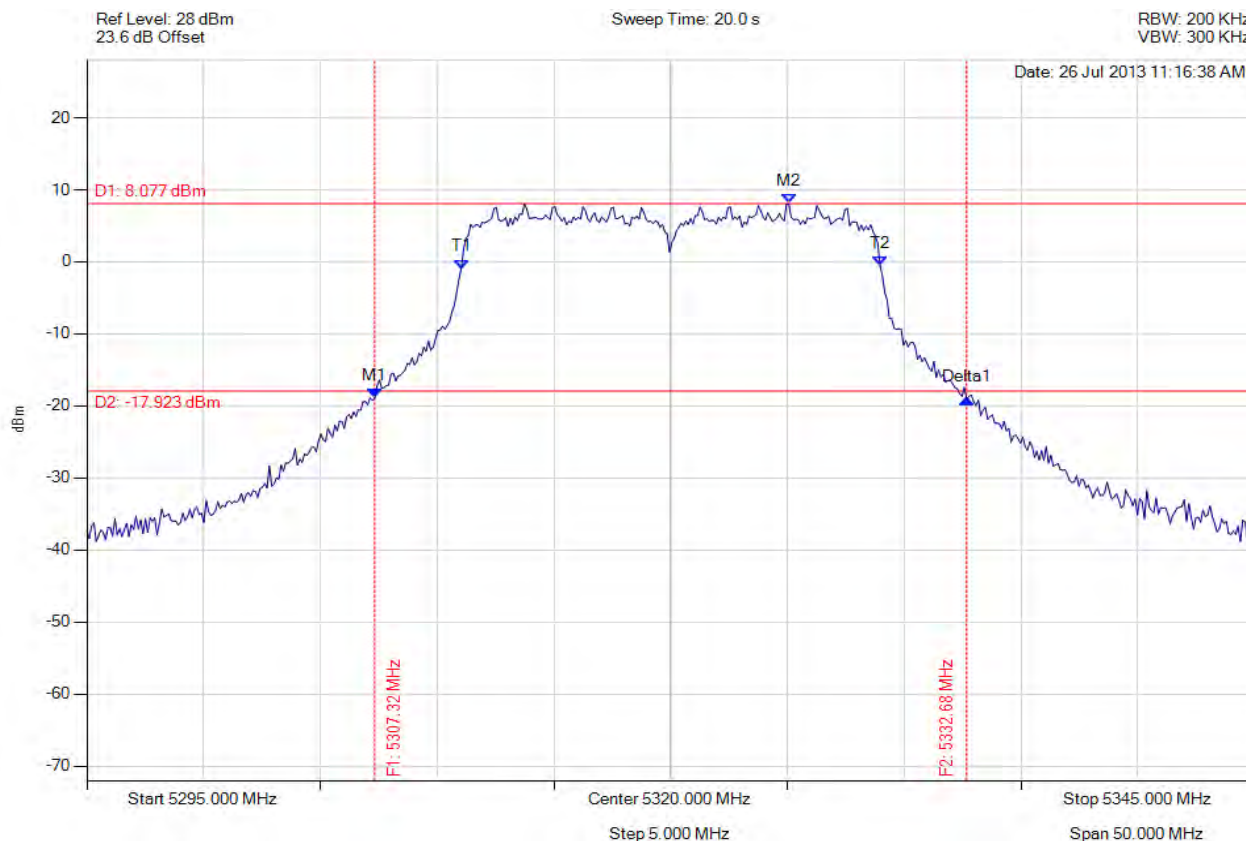

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5307.325 MHz : -18.949 dBm M2 : 5325.060 MHz : 8.077 dBm Delta1 : 25.351 MHz : -0.120 dB T1 : 5311.032 MHz : -0.956 dBm T2 : 5328.968 MHz : -0.550 dBm OBW : 17.936 MHz	Measured 26 dB Bandwidth: 25.351 MHz Measured 99% Bandwidth: 17.936 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-40, Channel: 5270.00 MHz, Chain a, Temp: Ambient, Voltage: 5 Vdc

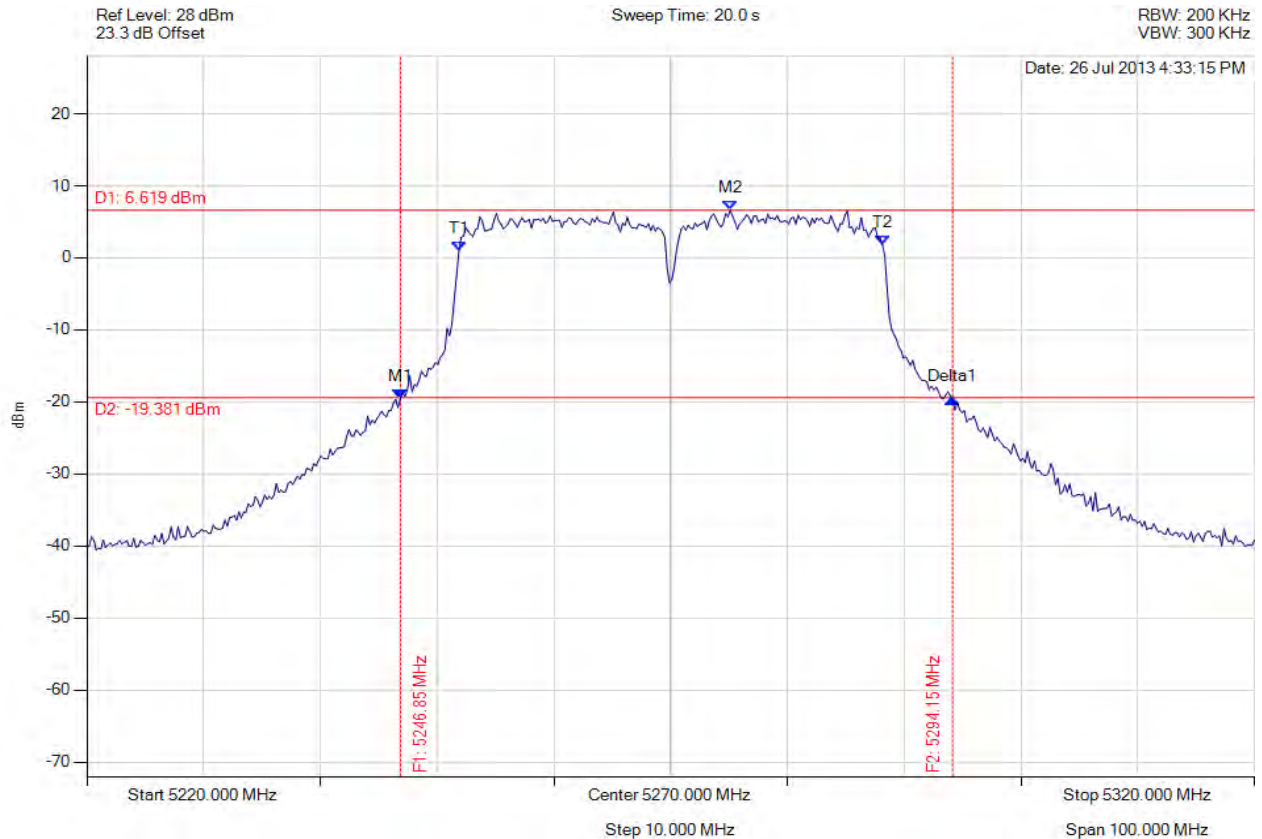

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5246.854 MHz : -19.539 dBm M2 : 5275.110 MHz : 6.619 dBm Delta1 : 47.295 MHz : -0.012 dB T1 : 5251.864 MHz : 1.008 dBm T2 : 5288.136 MHz : 1.840 dBm OBW : 36.273 MHz	Measured 26 dB Bandwidth: 47.295 MHz Measured 99% Bandwidth: 36.273 MHz

[Back to the Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-40, Channel: 5270.00 MHz, Chain b, Temp: Ambient, Voltage: 5 Vdc

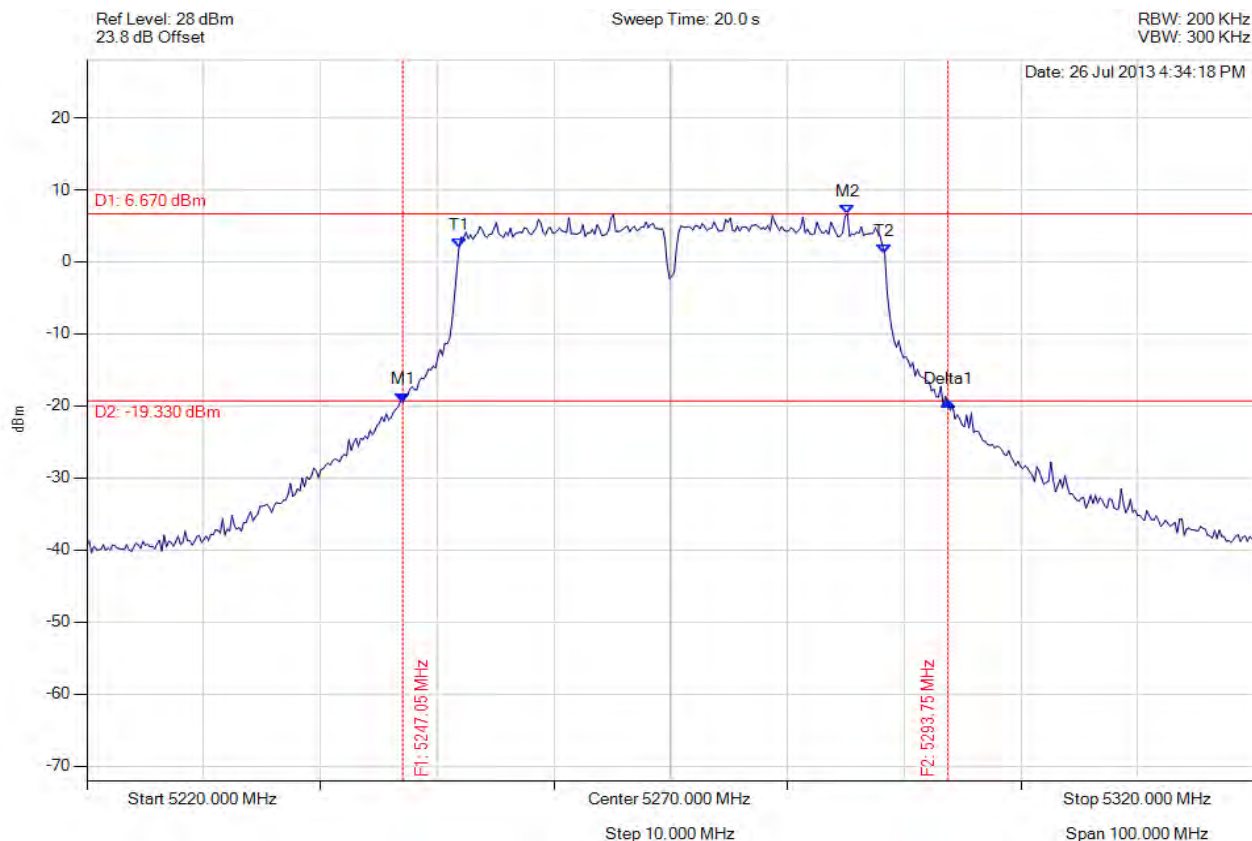

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5247.054 MHz : -19.474 dBm M2 : 5285.130 MHz : 6.670 dBm Delta1 : 46.693 MHz : 0.045 dB T1 : 5251.864 MHz : 1.974 dBm T2 : 5288.337 MHz : 1.155 dBm OBW : 36.473 MHz	Measured 26 dB Bandwidth: 46.693 MHz Measured 99% Bandwidth: 36.473 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-40, Channel: 5270.00 MHz, Chain c, Temp: Ambient, Voltage: 5 Vdc

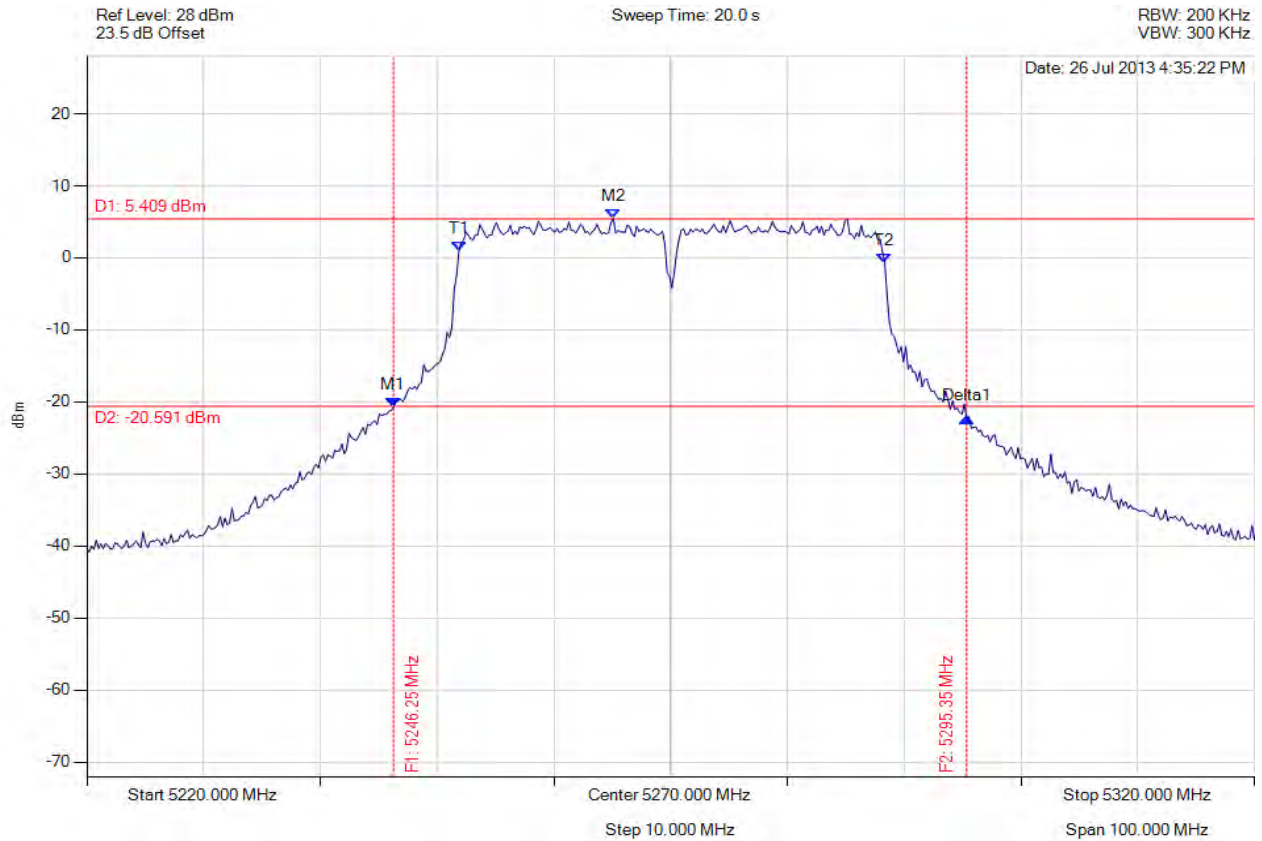

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5246.253 MHz : -20.761 dBm M2 : 5265.090 MHz : 5.409 dBm Delta1 : 49.098 MHz : -1.477 dB T1 : 5251.864 MHz : 1.008 dBm T2 : 5288.337 MHz : -0.666 dBm OBW : 36.473 MHz	Measured 26 dB Bandwidth: 49.098 MHz Measured 99% Bandwidth: 36.473 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-40, Channel: 5310.00 MHz, Chain a, Temp: Ambient, Voltage: 5 Vdc

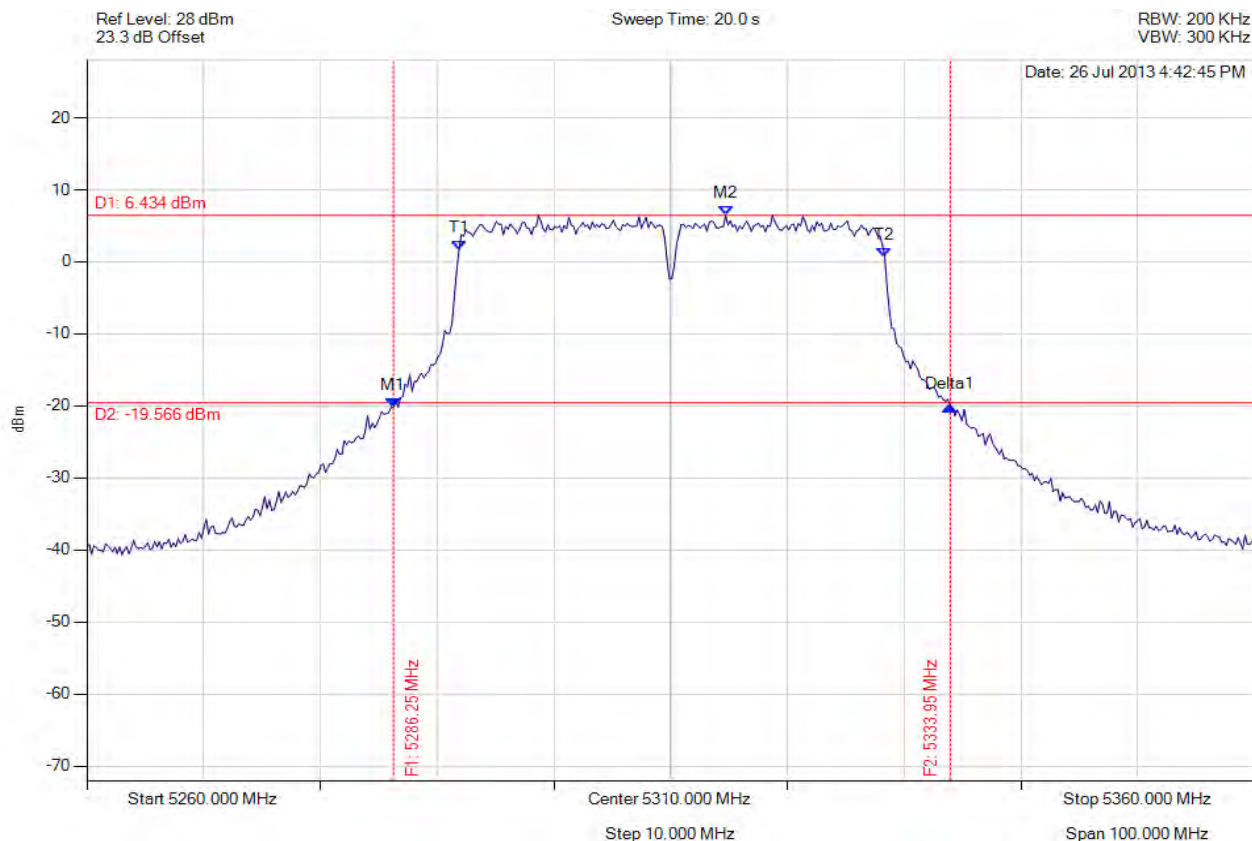

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5286.253 MHz : -20.157 dBm M2 : 5314.709 MHz : 6.434 dBm Delta1 : 47.695 MHz : 0.171 dB T1 : 5291.864 MHz : 1.606 dBm T2 : 5328.337 MHz : 0.644 dBm OBW : 36.473 MHz	Measured 26 dB Bandwidth: 47.695 MHz Measured 99% Bandwidth: 36.473 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-40, Channel: 5310.00 MHz, Chain b, Temp: Ambient, Voltage: 5 Vdc

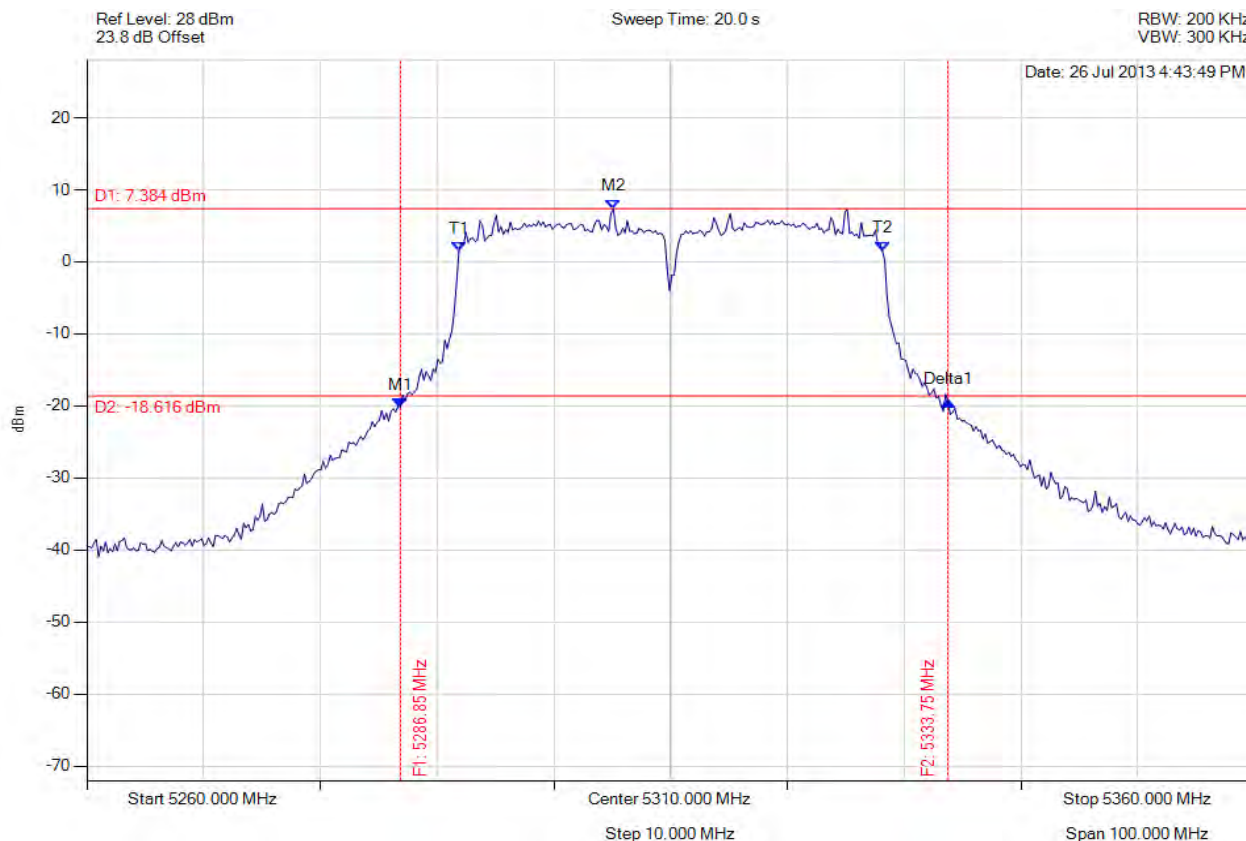


Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5286.854 MHz : -20.147 dBm M2 : 5305.090 MHz : 7.384 dBm Delta1 : 46.894 MHz : 0.757 dB T1 : 5291.864 MHz : 1.512 dBm T2 : 5328.136 MHz : 1.543 dBm OBW : 36.273 MHz	Measured 26 dB Bandwidth: 46.894 MHz Measured 99% Bandwidth: 36.273 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-40, Channel: 5310.00 MHz, Chain c, Temp: Ambient, Voltage: 5 Vdc

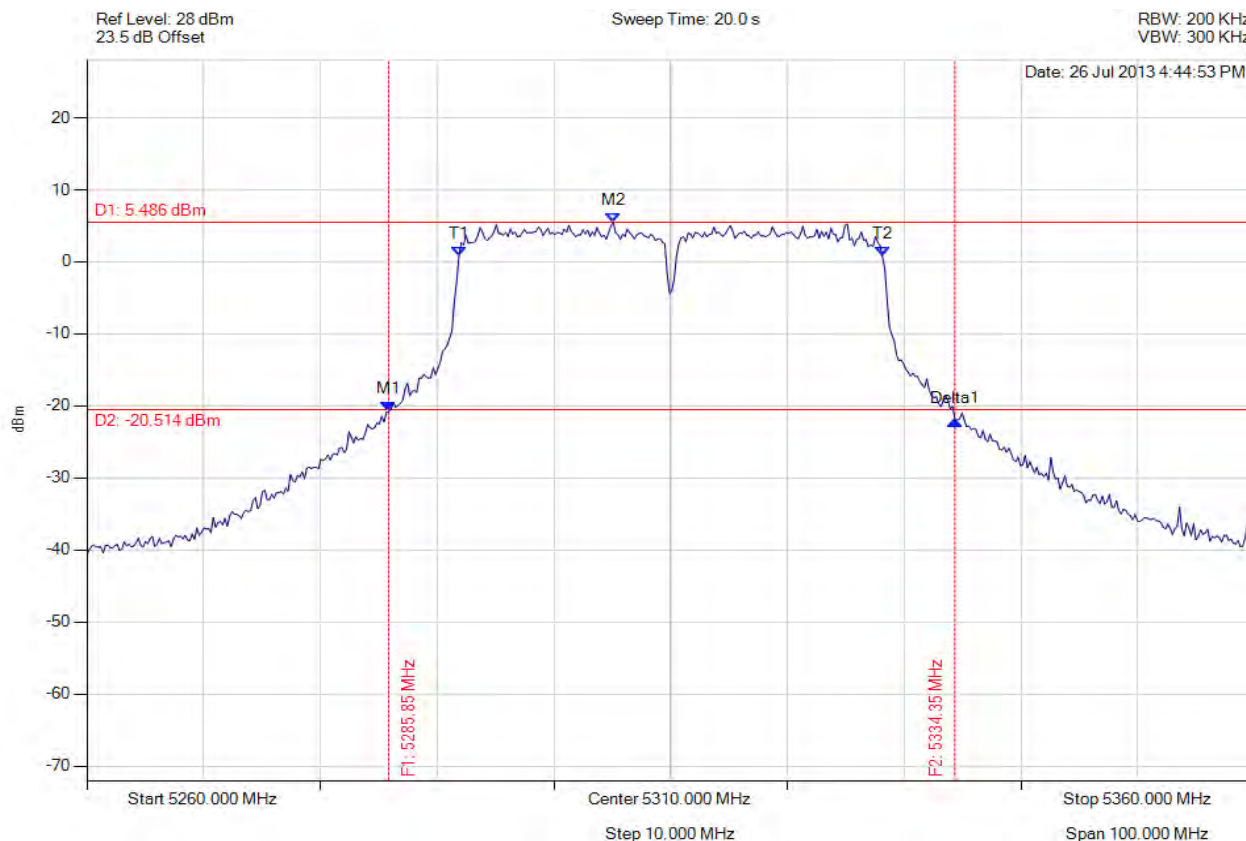

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5285.852 MHz : -20.779 dBm M2 : 5305.090 MHz : 5.486 dBm Delta1 : 48.497 MHz : -1.222 dB T1 : 5291.864 MHz : 0.831 dBm T2 : 5328.136 MHz : 0.738 dBm OBW : 36.273 MHz	Measured 26 dB Bandwidth: 48.497 MHz Measured 99% Bandwidth: 36.273 MHz

[Back to the Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**26 dB & 99% BANDWIDTH**

Variant: 802.11ac-40, Channel: 5270.00 MHz, Chain a, Temp: Ambient, Voltage: 5 Vdc

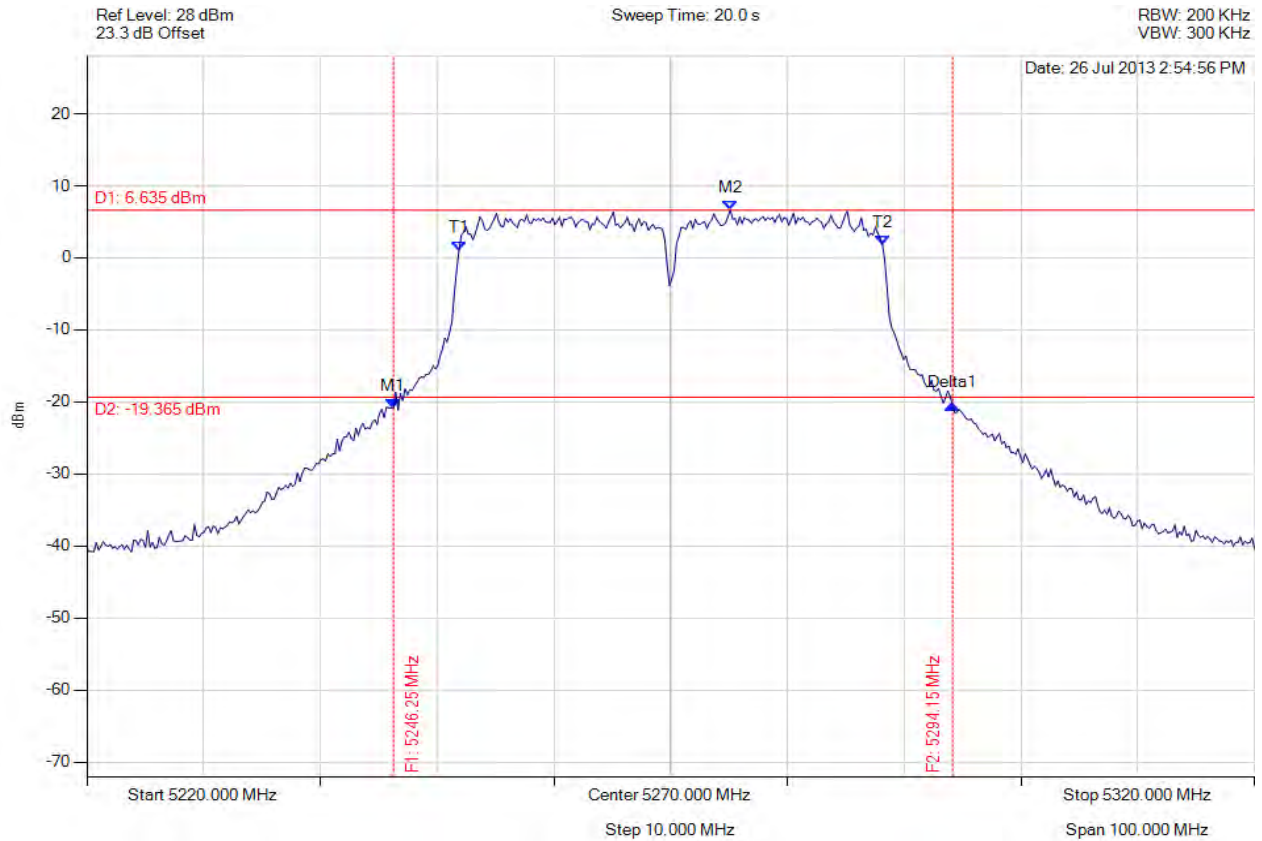

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5246.253 MHz : -20.816 dBm M2 : 5275.110 MHz : 6.635 dBm Delta1 : 47.896 MHz : 0.364 dB T1 : 5251.864 MHz : 1.041 dBm T2 : 5288.136 MHz : 1.828 dBm OBW : 36.273 MHz	Measured 26 dB Bandwidth: 47.896 MHz Measured 99% Bandwidth: 36.273 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11ac-40, Channel: 5270.00 MHz, Chain b, Temp: Ambient, Voltage: 5 Vdc

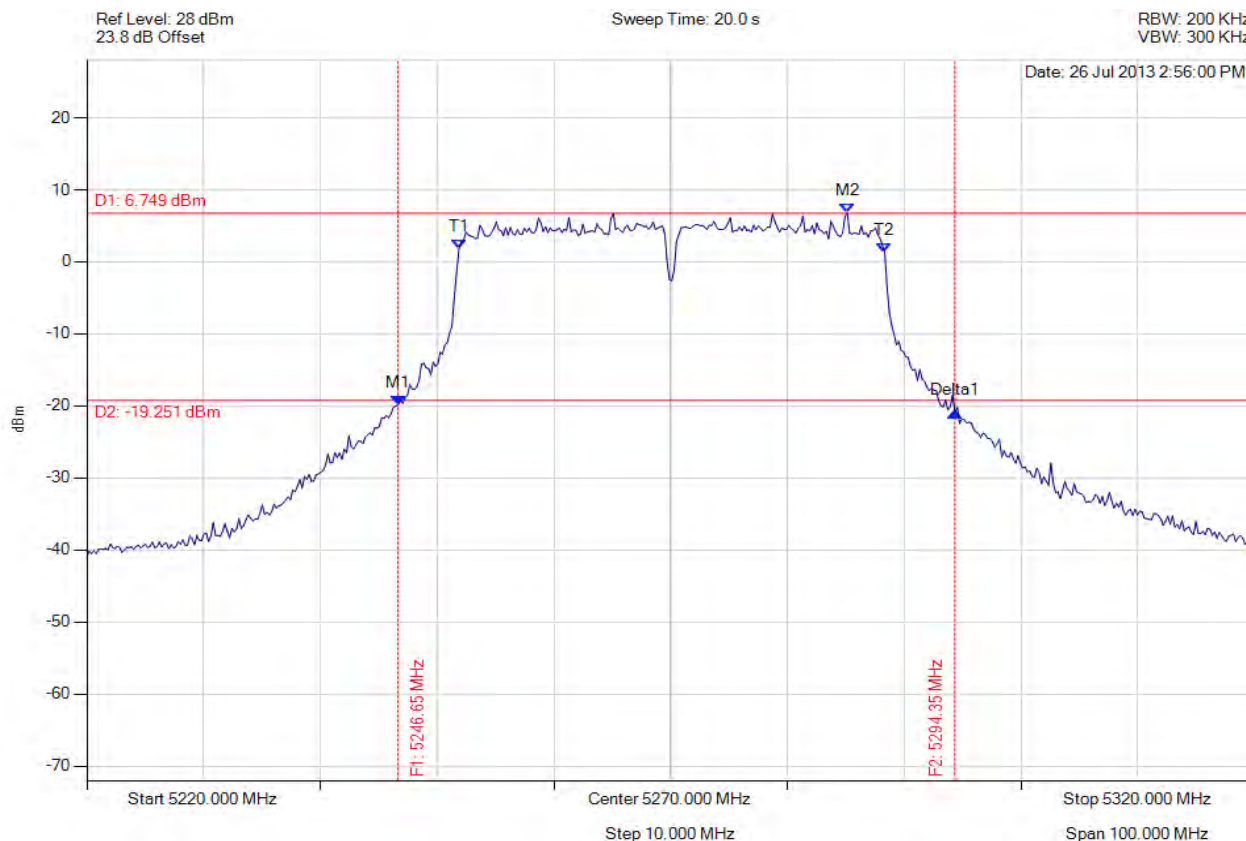

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5246.653 MHz : -19.828 dBm M2 : 5285.130 MHz : 6.749 dBm Delta1 : 47.695 MHz : -1.123 dB T1 : 5251.864 MHz : 1.750 dBm T2 : 5288.337 MHz : 1.258 dBm OBW : 36.473 MHz	Measured 26 dB Bandwidth: 47.695 MHz Measured 99% Bandwidth: 36.473 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11ac-40, Channel: 5270.00 MHz, Chain c, Temp: Ambient, Voltage: 5 Vdc

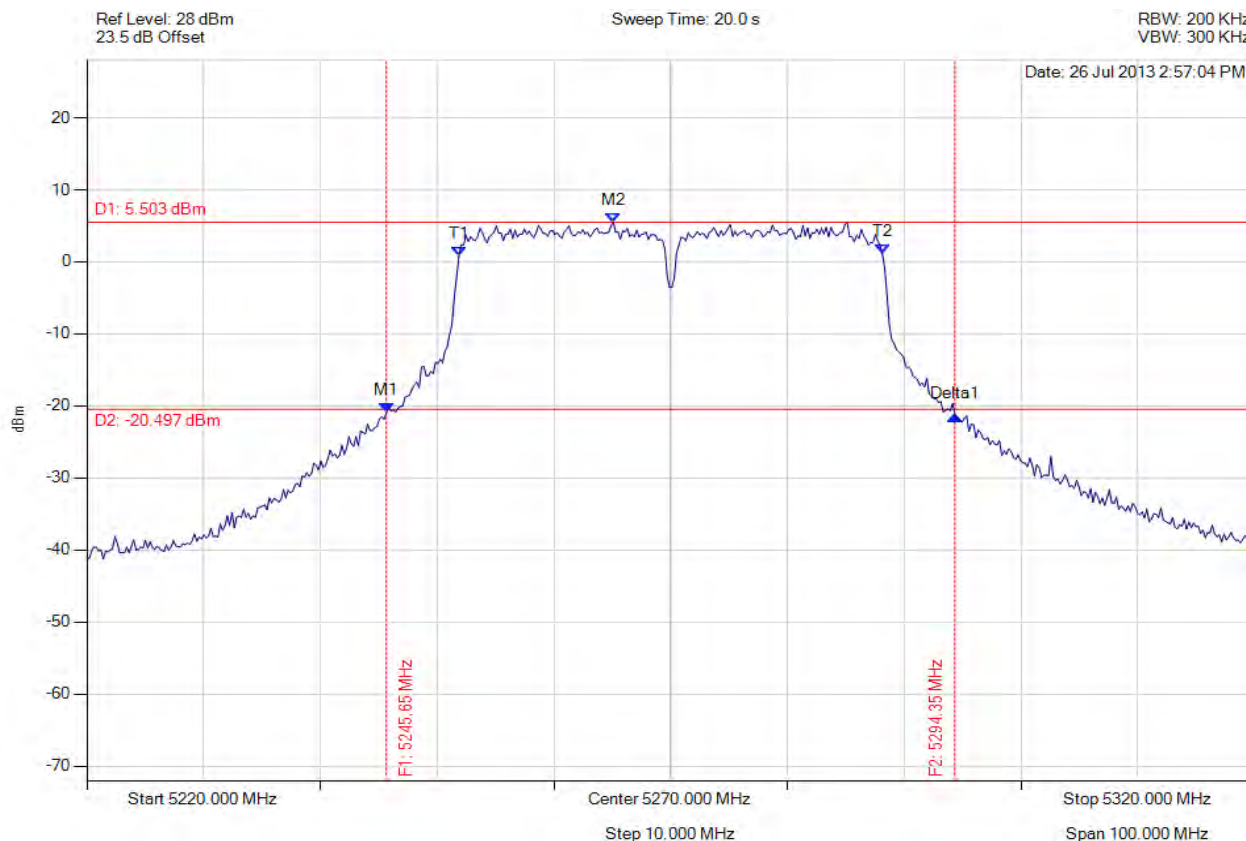

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5245.651 MHz : -20.926 dBm M2 : 5265.090 MHz : 5.503 dBm Delta1 : 48.697 MHz : -0.474 dB T1 : 5251.864 MHz : 0.774 dBm T2 : 5288.136 MHz : 1.075 dBm OBW : 36.273 MHz	Measured 26 dB Bandwidth: 48.697 MHz Measured 99% Bandwidth: 36.273 MHz

[Back to the Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**26 dB & 99% BANDWIDTH**

Variant: 802.11ac-40, Channel: 5310.00 MHz, Chain a, Temp: Ambient, Voltage: 5 Vdc

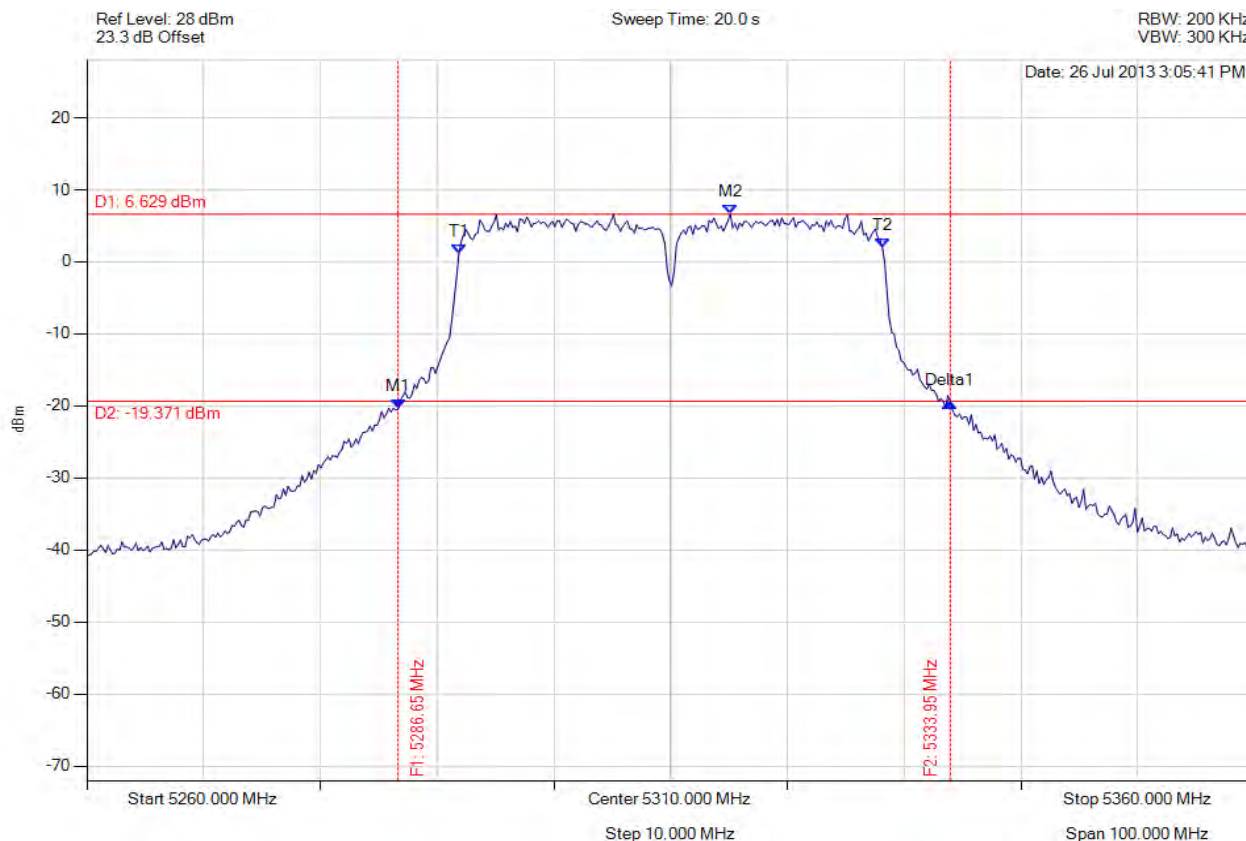

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5286.653 MHz : -20.403 dBm M2 : 5315.110 MHz : 6.629 dBm Delta1 : 47.295 MHz : 0.925 dB T1 : 5291.864 MHz : 1.203 dBm T2 : 5328.136 MHz : 1.994 dBm OBW : 36.273 MHz	Measured 26 dB Bandwidth: 47.295 MHz Measured 99% Bandwidth: 36.273 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11ac-40, Channel: 5310.00 MHz, Chain b, Temp: Ambient, Voltage: 5 Vdc

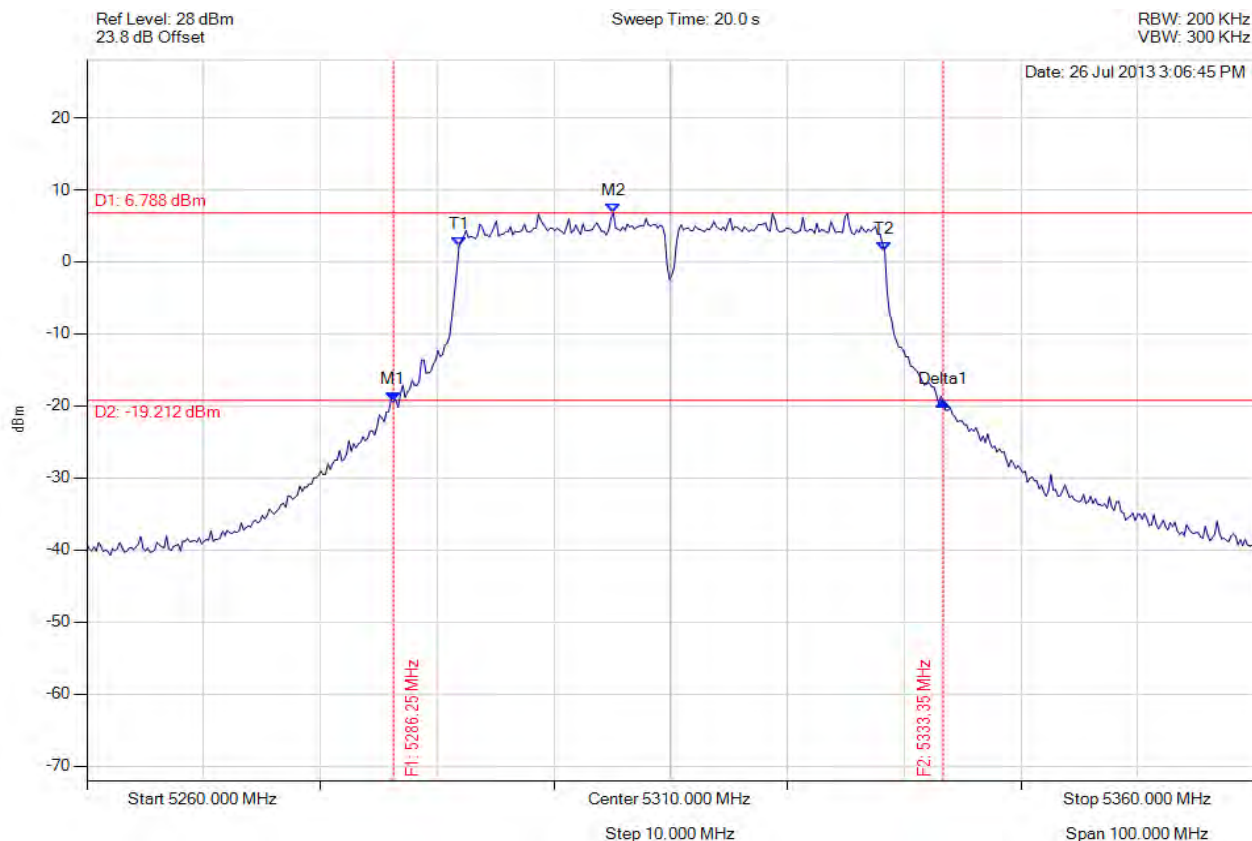

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5286.253 MHz : -19.431 dBm M2 : 5305.090 MHz : 6.788 dBm Delta1 : 47.094 MHz : -0.024 dB T1 : 5291.864 MHz : 2.056 dBm T2 : 5328.337 MHz : 1.447 dBm OBW : 36.473 MHz	Measured 26 dB Bandwidth: 47.094 MHz Measured 99% Bandwidth: 36.473 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11ac-40, Channel: 5310.00 MHz, Chain c, Temp: Ambient, Voltage: 5 Vdc

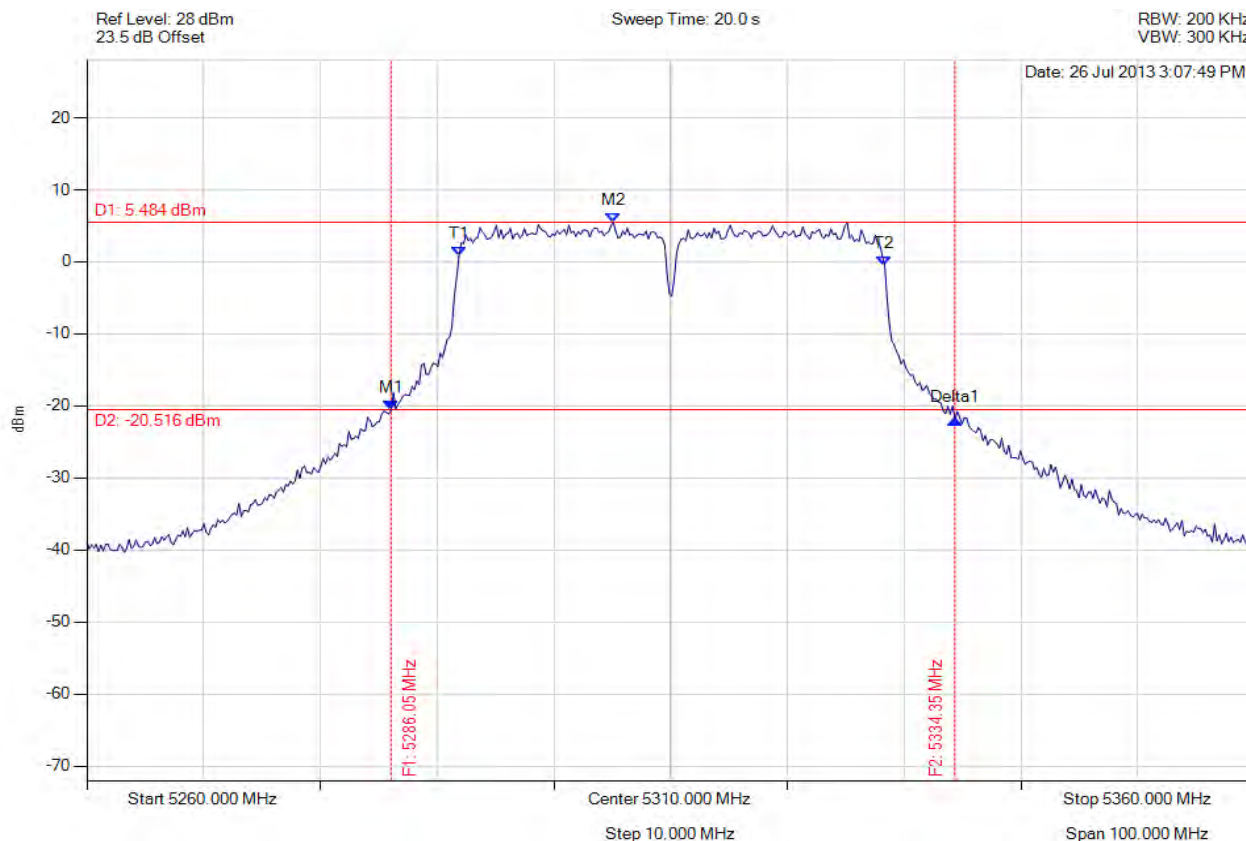

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5286.052 MHz : -20.627 dBm M2 : 5305.090 MHz : 5.484 dBm Delta1 : 48.297 MHz : -1.271 dB T1 : 5291.864 MHz : 0.752 dBm T2 : 5328.337 MHz : -0.489 dBm OBW : 36.473 MHz	Measured 26 dB Bandwidth: 48.297 MHz Measured 99% Bandwidth: 36.473 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11ac-80, Channel: 5290.00 MHz, Chain a, Temp: Ambient, Voltage: 5 Vdc

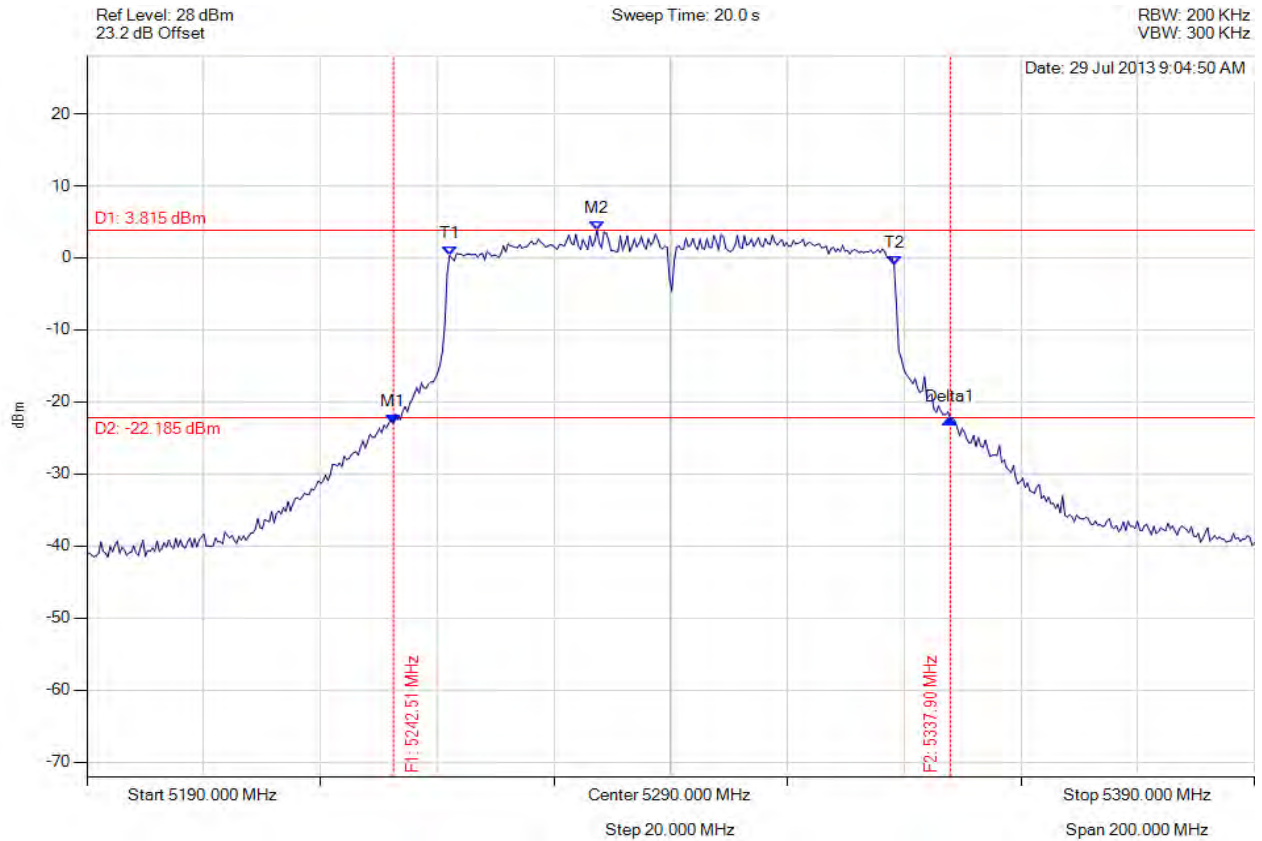

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5242.505 MHz : -22.984 dBm M2 : 5277.375 MHz : 3.815 dBm Delta1 : 95.391 MHz : 0.600 dB T1 : 5252.124 MHz : 0.325 dBm T2 : 5328.277 MHz : -0.993 dBm OBW : 76.152 MHz	Measured 26 dB Bandwidth: 95.391 MHz Measured 99% Bandwidth: 76.152 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11ac-80, Channel: 5290.00 MHz, Chain b, Temp: Ambient, Voltage: 5 Vdc

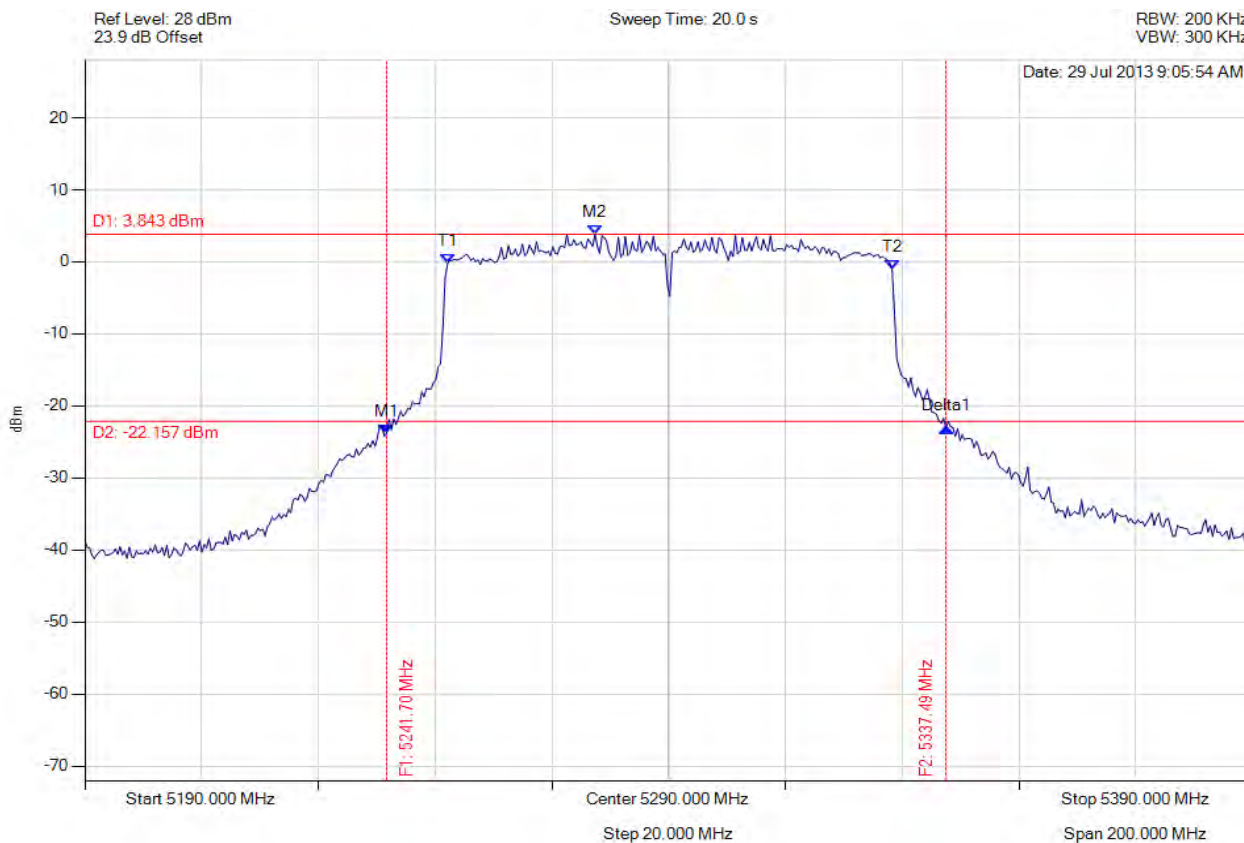

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5241.703 MHz : -23.854 dBm M2 : 5277.375 MHz : 3.843 dBm Delta1 : 95.792 MHz : 0.795 dB T1 : 5252.124 MHz : -0.232 dBm T2 : 5328.277 MHz : -1.103 dBm OBW : 76.152 MHz	Measured 26 dB Bandwidth: 95.792 MHz Measured 99% Bandwidth: 76.152 MHz

[Back to the Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**26 dB & 99% BANDWIDTH**

Variant: 802.11ac-80, Channel: 5290.00 MHz, Chain c, Temp: Ambient, Voltage: 5 Vdc

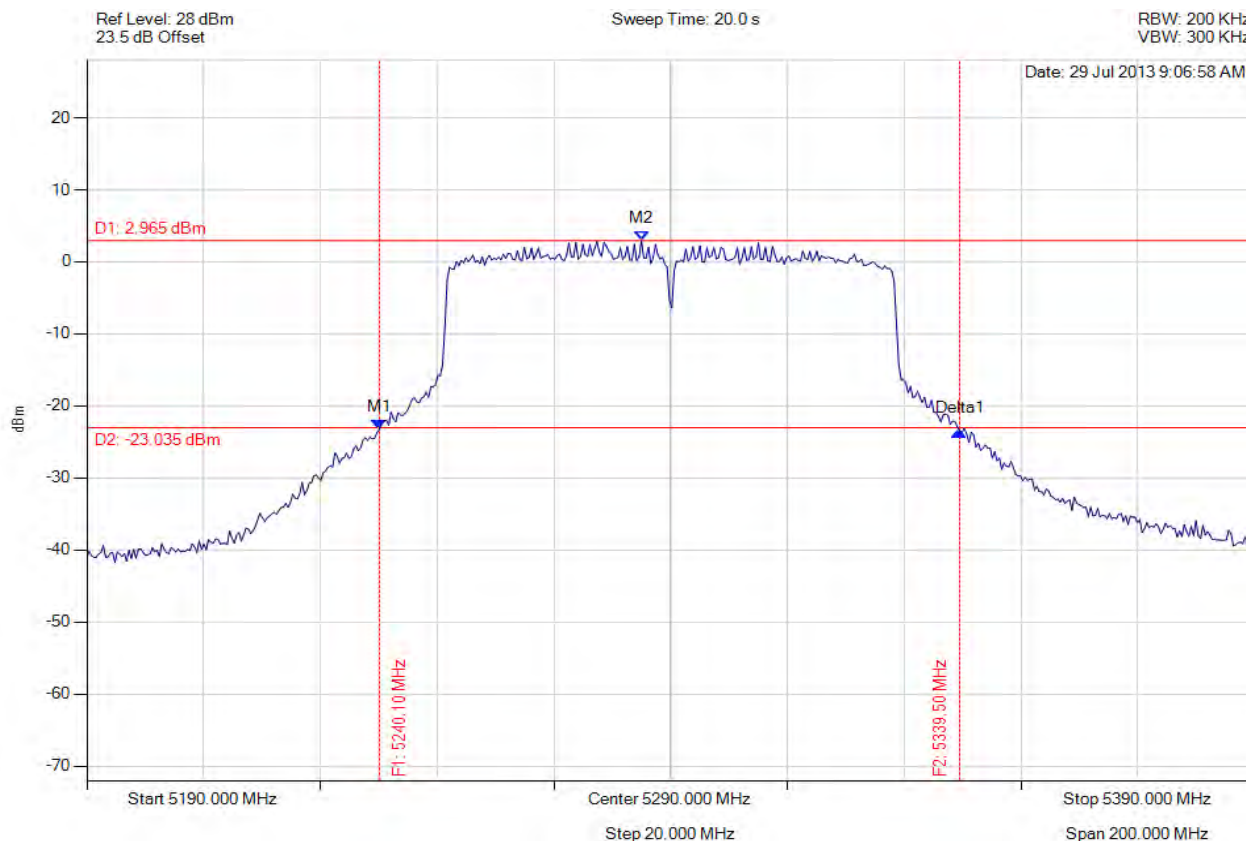

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5240.100 MHz : -23.263 dBm M2 : 5284.990 MHz : 2.965 dBm Delta1 : 99.399 MHz : -0.207 dB T1 : 0 Hz : 500.000 dBm T2 : 0 Hz : 500.000 dBm OBW : 75.752 MHz	Measured 26 dB Bandwidth: 99.399 MHz Measured 99% Bandwidth: 75.752 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11a, Channel: 5500.00 MHz, Chain a, Temp: Ambient, Voltage: 5 Vdc

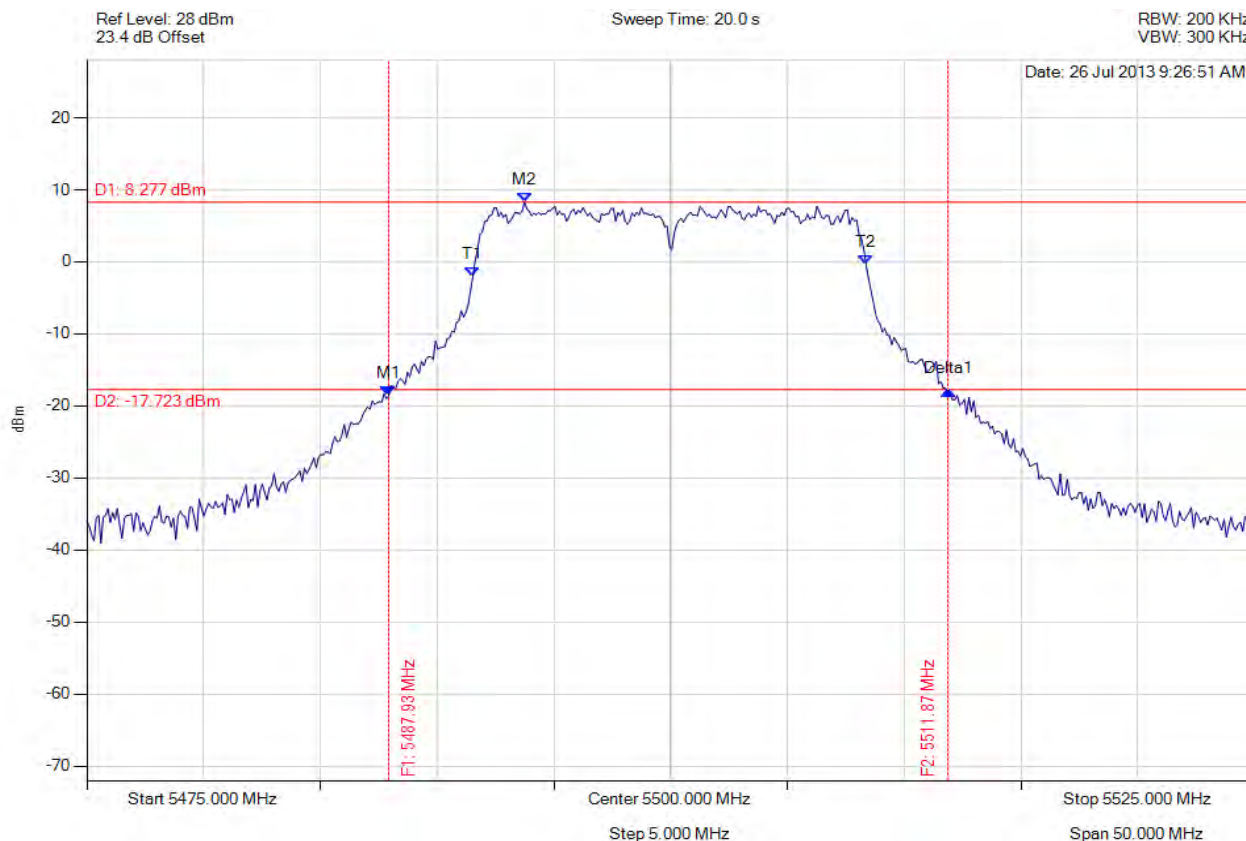

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5487.926 MHz : -18.624 dBm M2 : 5493.737 MHz : 8.277 dBm Delta1 : 23.948 MHz : 0.738 dB T1 : 5491.533 MHz : -2.040 dBm T2 : 5508.367 MHz : -0.383 dBm OBW : 16.834 MHz	Measured 26 dB Bandwidth: 23.948 MHz Measured 99% Bandwidth: 16.834 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 235 of 407



**26 dB & 99% BANDWIDTH**

Variant: 802.11a, Channel: 5500.00 MHz, Chain b, Temp: Ambient, Voltage: 5 Vdc

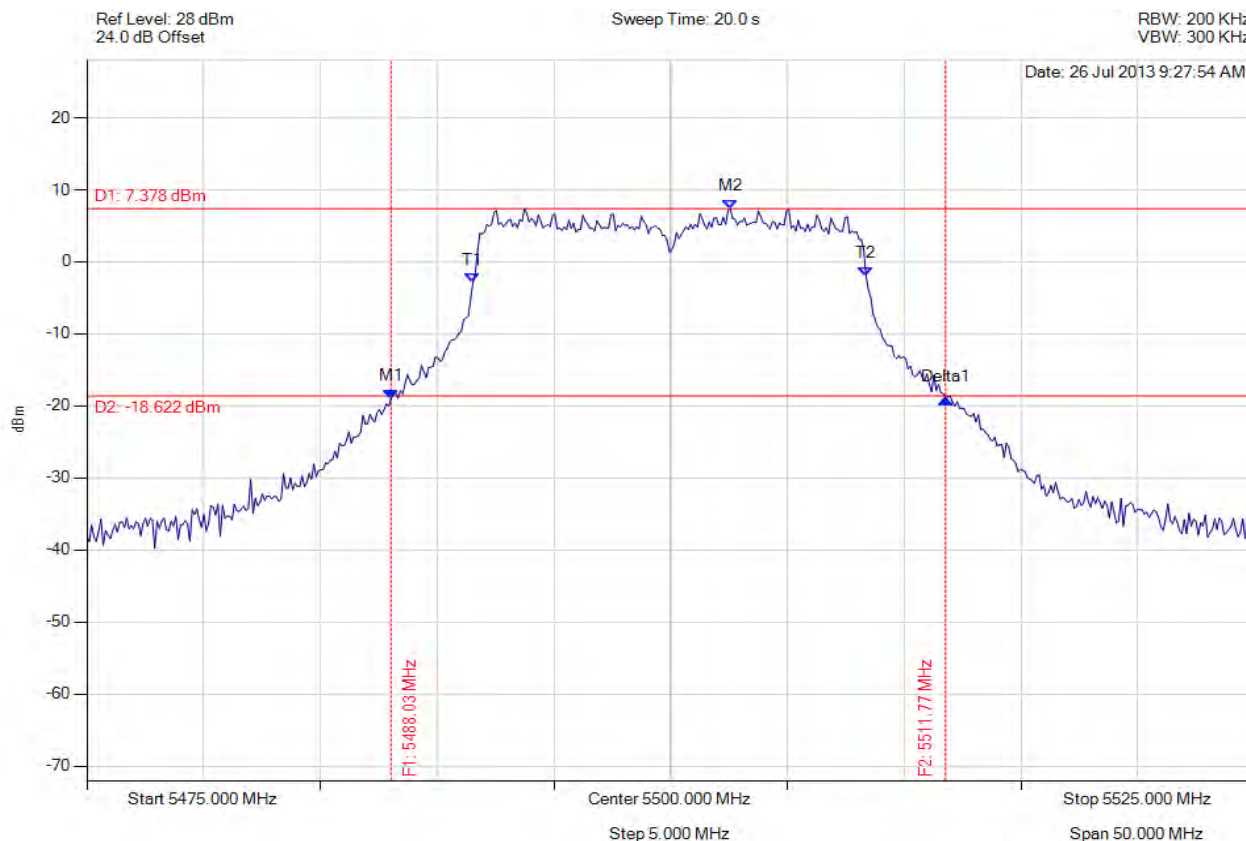

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5488.026 MHz : -18.971 dBm M2 : 5502.555 MHz : 7.378 dBm Delta1 : 23.747 MHz : -0.077 dB T1 : 5491.533 MHz : -2.901 dBm T2 : 5508.367 MHz : -1.951 dBm OBW : 16.834 MHz	Measured 26 dB Bandwidth: 23.747 MHz Measured 99% Bandwidth: 16.834 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.






**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 236 of 407



**26 dB & 99% BANDWIDTH**

Variant: 802.11a, Channel: 5500.00 MHz, Chain c, Temp: Ambient, Voltage: 5 Vdc

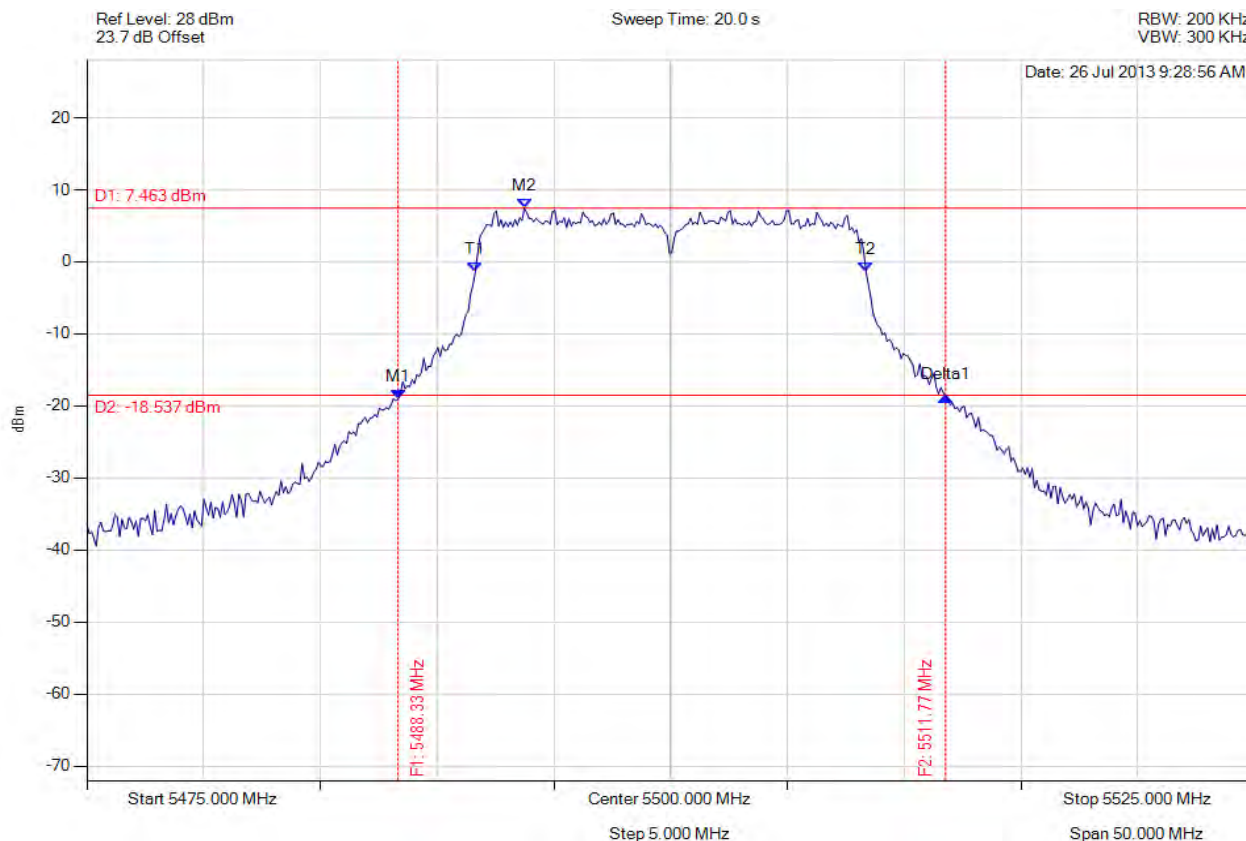

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5488.327 MHz : -19.022 dBm M2 : 5493.737 MHz : 7.463 dBm Delta1 : 23.447 MHz : 0.366 dB T1 : 5491.633 MHz : -1.353 dBm T2 : 5508.367 MHz : -1.432 dBm OBW : 16.733 MHz	Measured 26 dB Bandwidth: 23.447 MHz Measured 99% Bandwidth: 16.733 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11a, Channel: 5580.00 MHz, Chain a, Temp: Ambient, Voltage: 5 Vdc

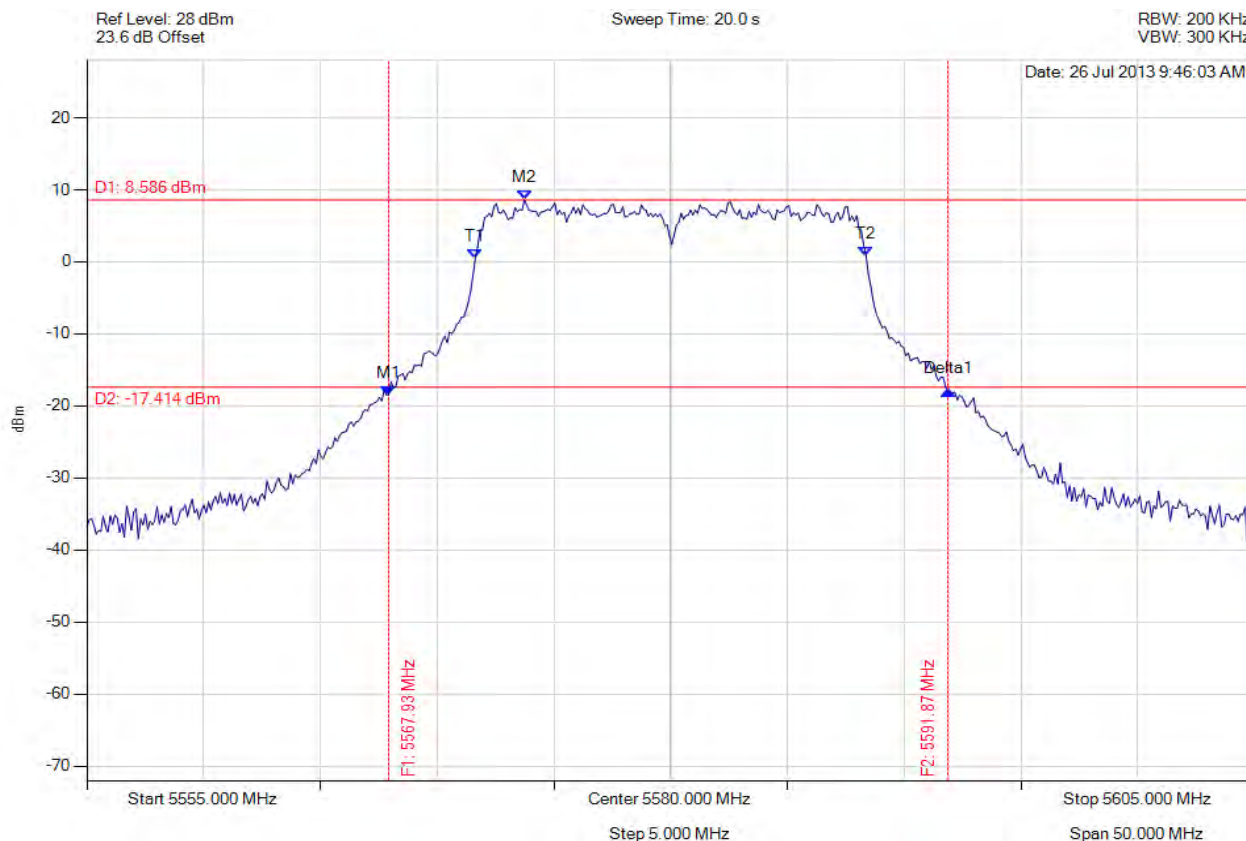

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5567.926 MHz : -18.479 dBm M2 : 5573.737 MHz : 8.586 dBm Delta1 : 23.948 MHz : 0.574 dB T1 : 5571.633 MHz : 0.494 dBm T2 : 5588.367 MHz : 0.858 dBm OBW : 16.733 MHz	Measured 26 dB Bandwidth: 23.948 MHz Measured 99% Bandwidth: 16.733 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11a, Channel: 5580.00 MHz, Chain b, Temp: Ambient, Voltage: 5 Vdc

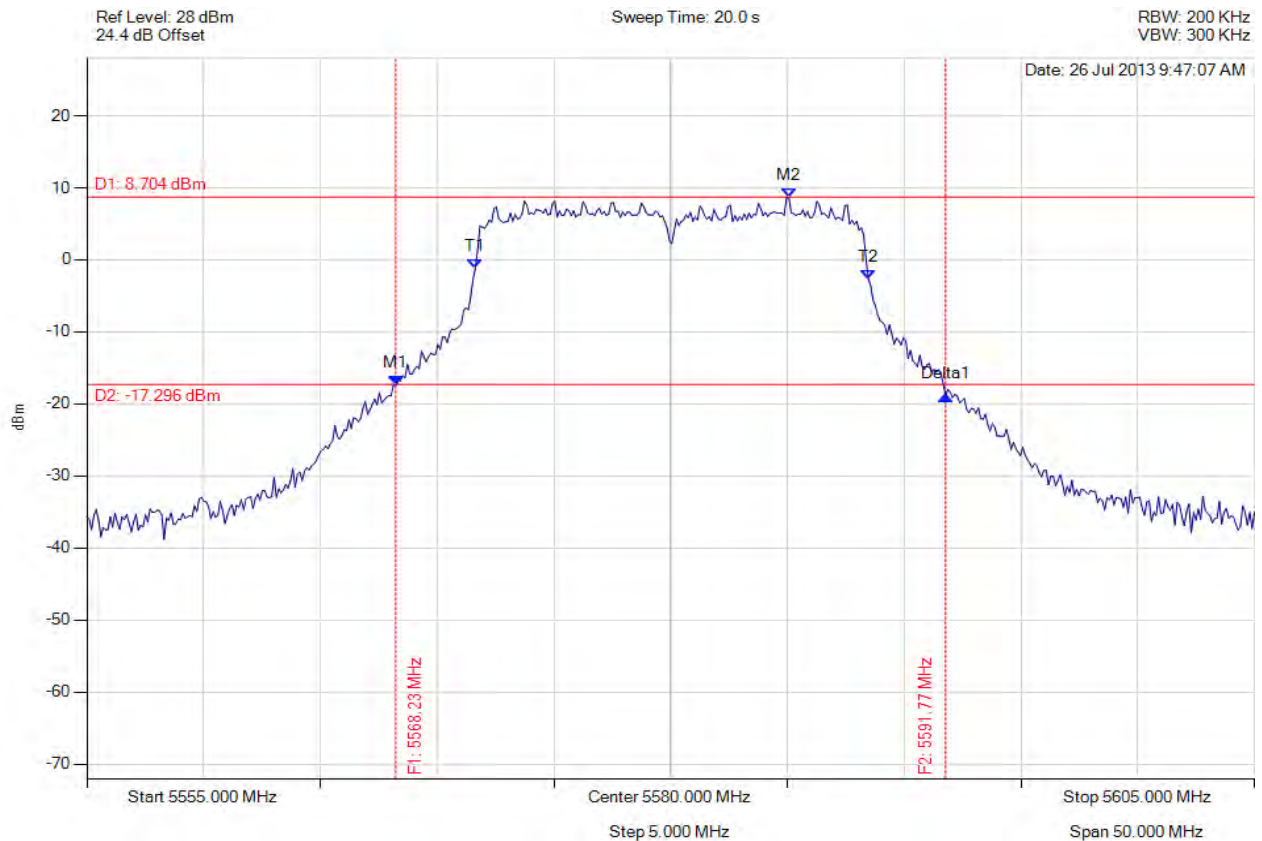

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5568.226 MHz : -17.416 dBm M2 : 5585.060 MHz : 8.704 dBm Delta1 : 23.547 MHz : -1.415 dB T1 : 5571.633 MHz : -1.135 dBm T2 : 5588.467 MHz : -2.655 dBm OBW : 16.834 MHz	Measured 26 dB Bandwidth: 23.547 MHz Measured 99% Bandwidth: 16.834 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11a, Channel: 5580.00 MHz, Chain c, Temp: Ambient, Voltage: 5 Vdc

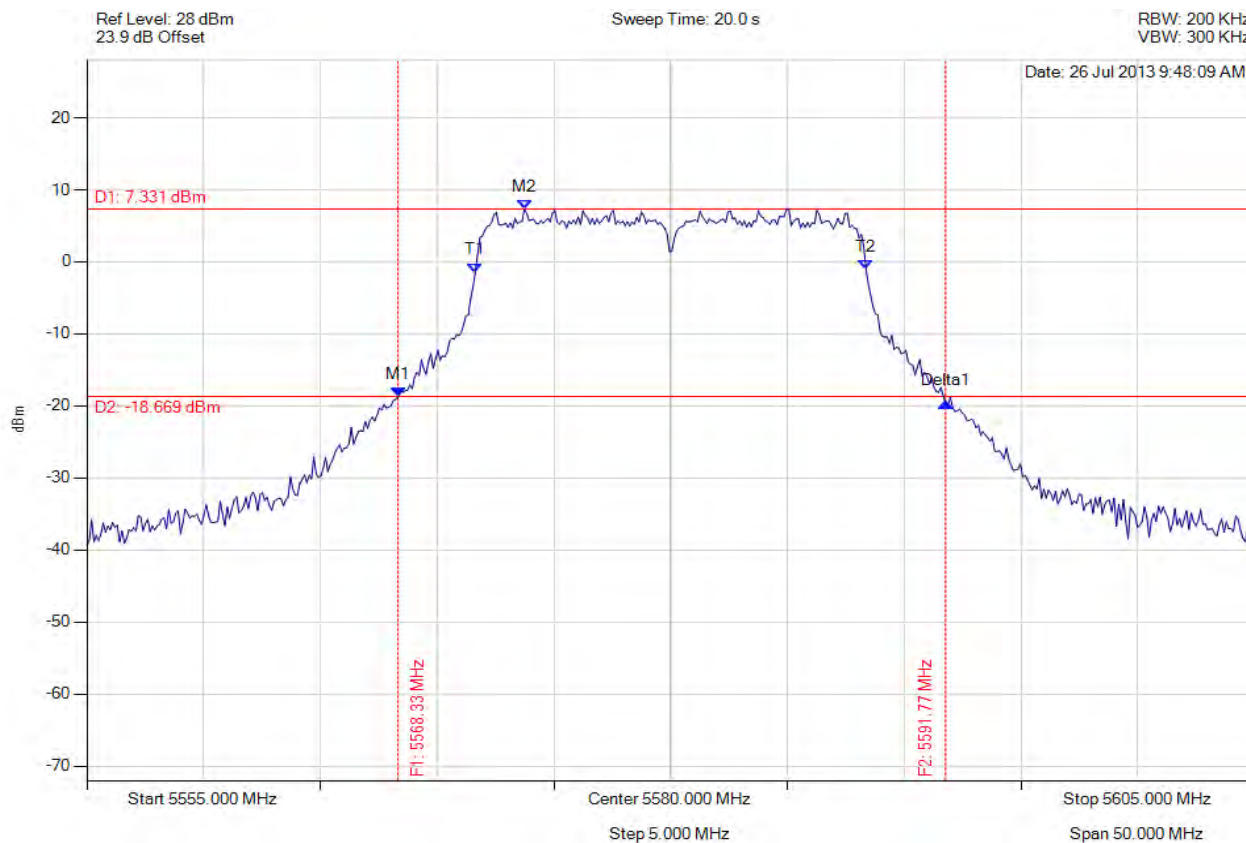

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5568.327 MHz : -18.752 dBm M2 : 5573.737 MHz : 7.331 dBm Delta1 : 23.447 MHz : -0.826 dB T1 : 5571.633 MHz : -1.459 dBm T2 : 5588.367 MHz : -1.052 dBm OBW : 16.733 MHz	Measured 26 dB Bandwidth: 23.447 MHz Measured 99% Bandwidth: 16.733 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 240 of 407



### 26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5700.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

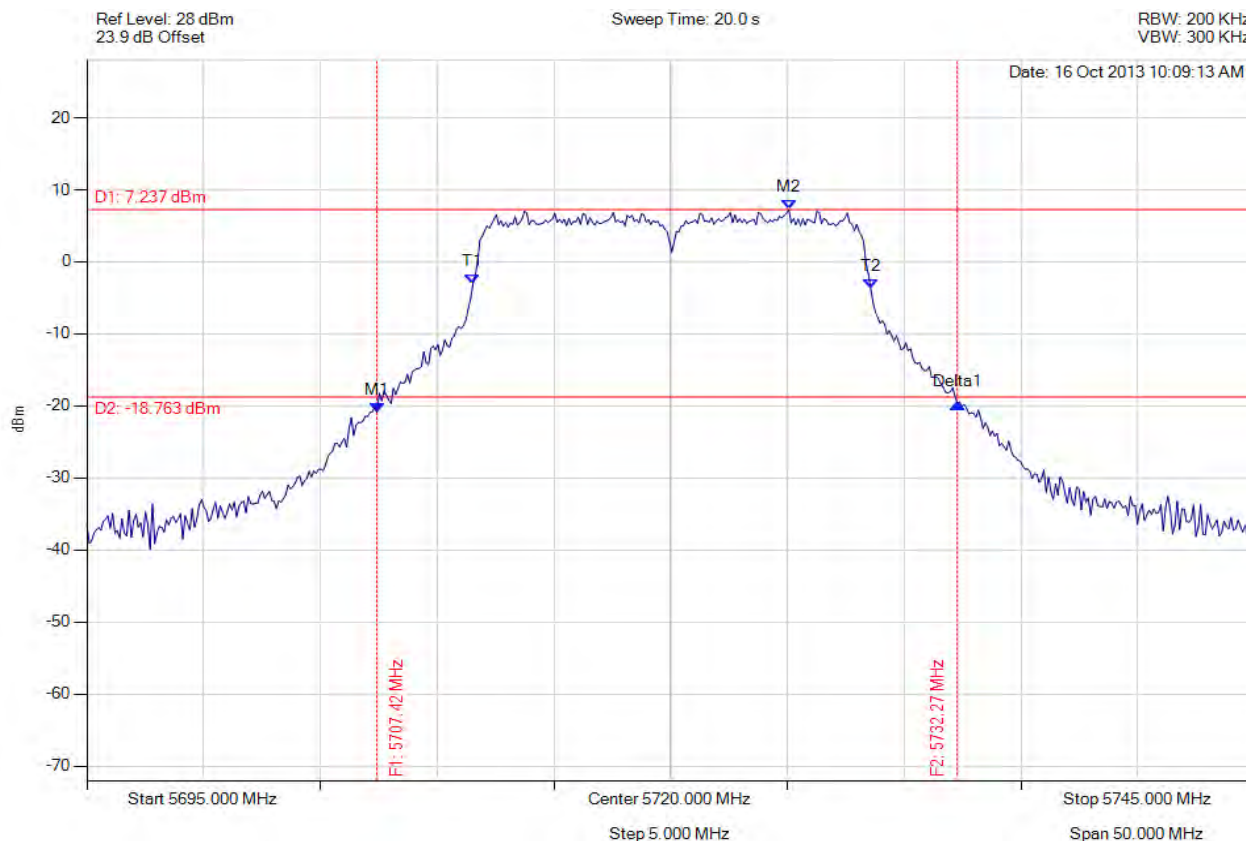

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5707.425 MHz : -20.869 dBm M2 : 5725.060 MHz : 7.237 dBm Delta1 : 24.850 MHz : 1.220 dB T1 : 5711.533 MHz : -3.070 dBm T2 : 5728.567 MHz : -3.718 dBm OBW : 17.034 MHz	Measured 26 dB Bandwidth: 24.850 MHz Measured 99% Bandwidth: 17.034 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.






**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 241 of 407



**26 dB & 99% BANDWIDTH**

Variant: 802.11a, Channel: 5700.00 MHz, Chain b, Temp: Ambient, Voltage: 5 Vdc

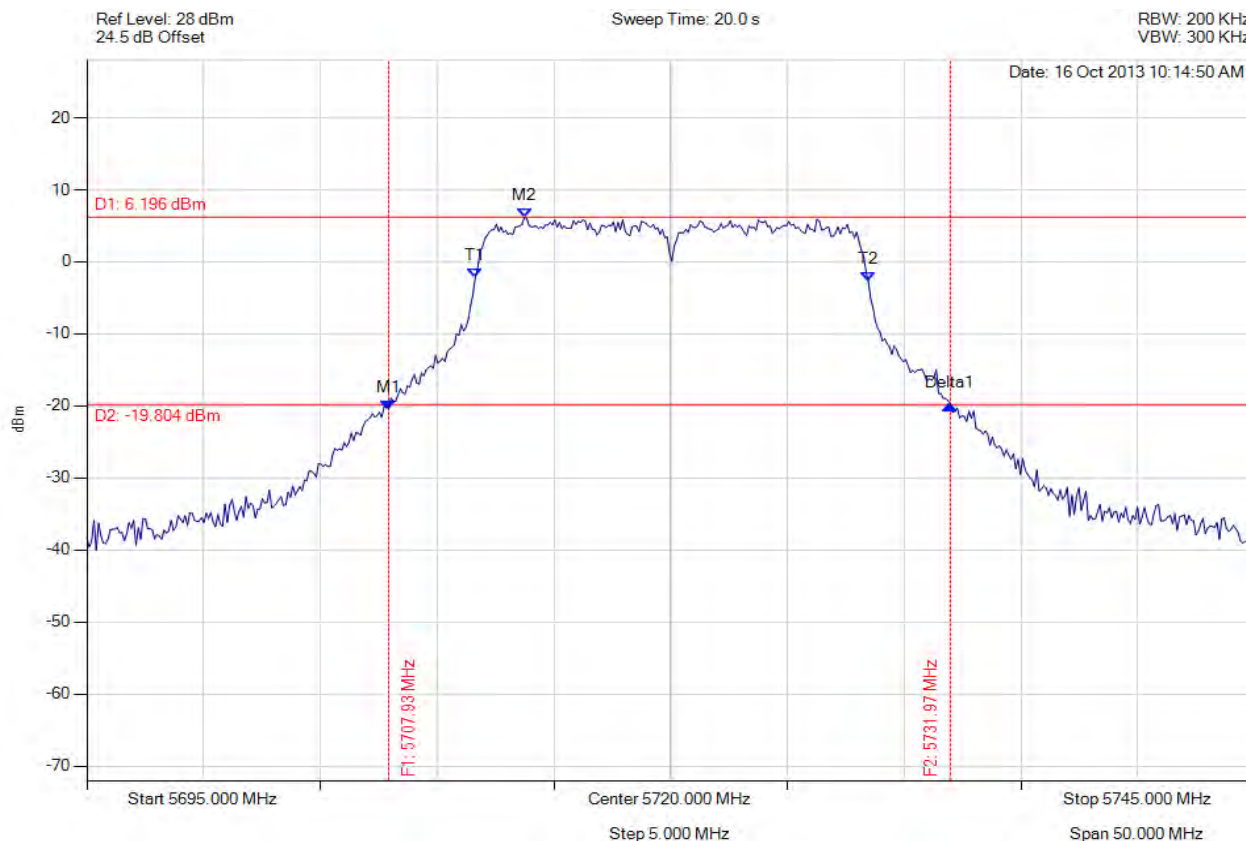

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5707.926 MHz : -20.478 dBm M2 : 5713.737 MHz : 6.196 dBm Delta1 : 24.048 MHz : 0.651 dB T1 : 5711.633 MHz : -2.134 dBm T2 : 5728.467 MHz : -2.777 dBm OBW : 16.834 MHz	Measured 26 dB Bandwidth: 24.048 MHz Measured 99% Bandwidth: 16.834 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11a, Channel: 5700.00 MHz, Chain c, Temp: Ambient, Voltage: 5 Vdc

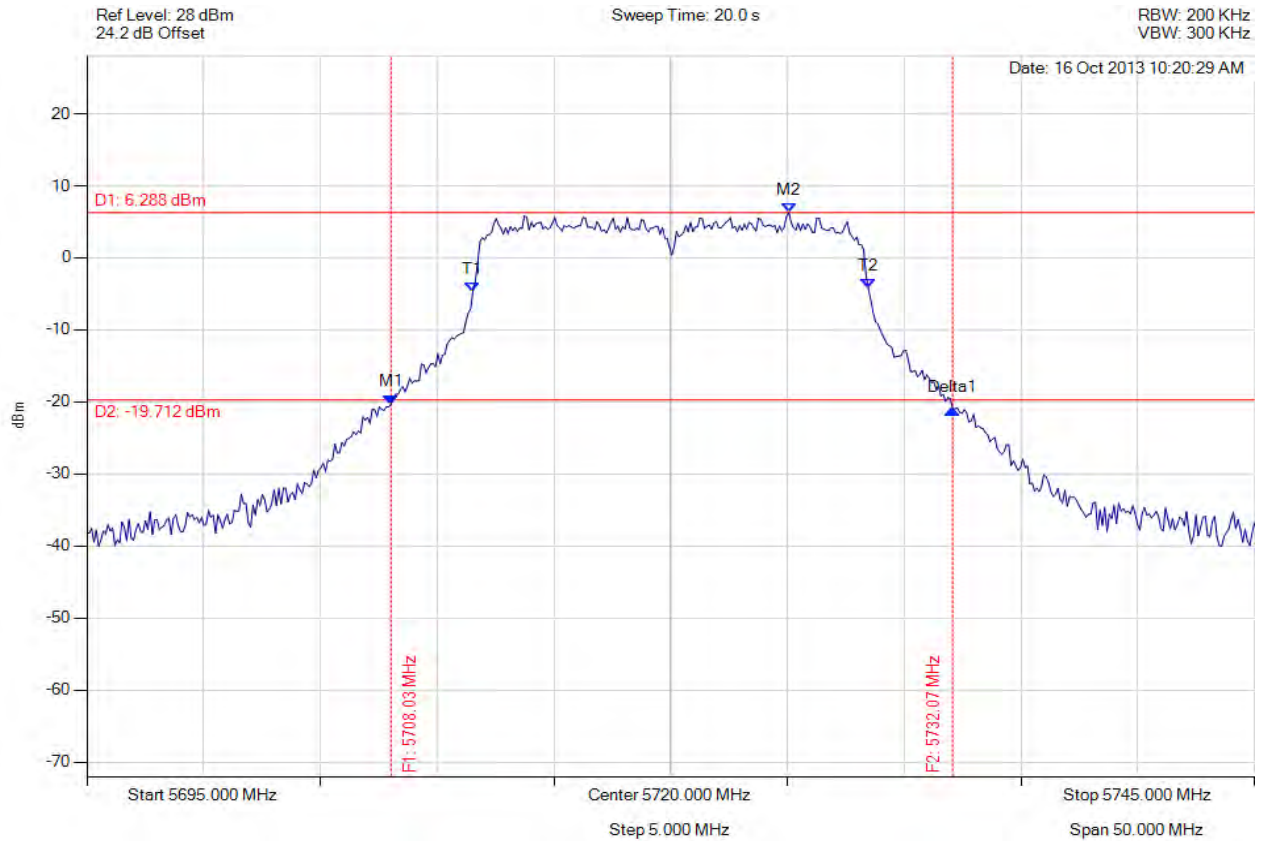

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5708.026 MHz : -20.303 dBm M2 : 5725.060 MHz : 6.288 dBm Delta1 : 24.048 MHz : -0.716 dB T1 : 5711.533 MHz : -4.652 dBm T2 : 5728.467 MHz : -4.225 dBm OBW : 16.934 MHz	Measured 26 dB Bandwidth: 24.048 MHz Measured 99% Bandwidth: 16.934 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.






**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 243 of 407



**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-20, Channel: 5500.00 MHz, Chain a, Temp: Ambient, Voltage: 5 Vdc

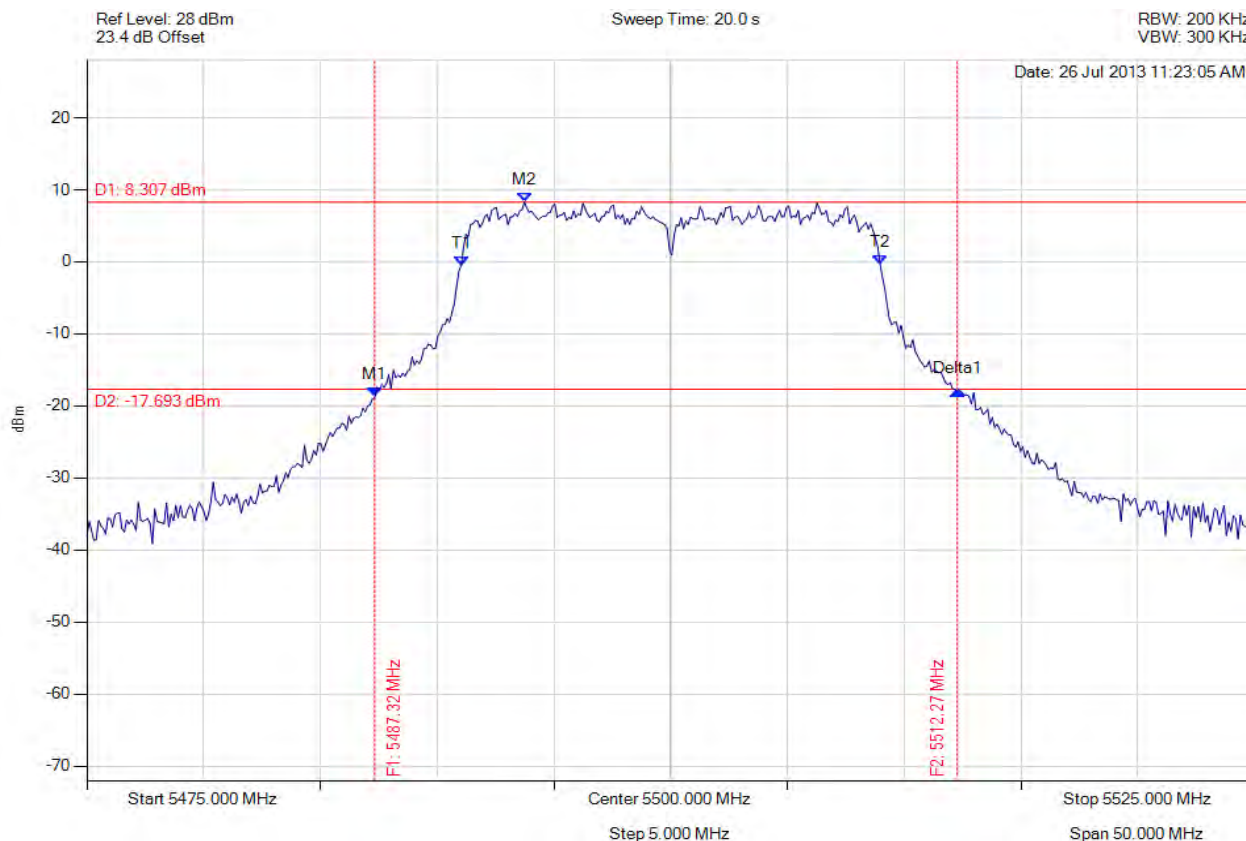

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5487.325 MHz : -18.792 dBm M2 : 5493.737 MHz : 8.307 dBm Delta1 : 24.950 MHz : 0.976 dB T1 : 5491.032 MHz : -0.468 dBm T2 : 5508.968 MHz : -0.312 dBm OBW : 17.936 MHz	Measured 26 dB Bandwidth : 24.950 MHz Measured 99% Bandwidth : 17.936 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-20, Channel: 5500.00 MHz, Chain b, Temp: Ambient, Voltage: 5 Vdc

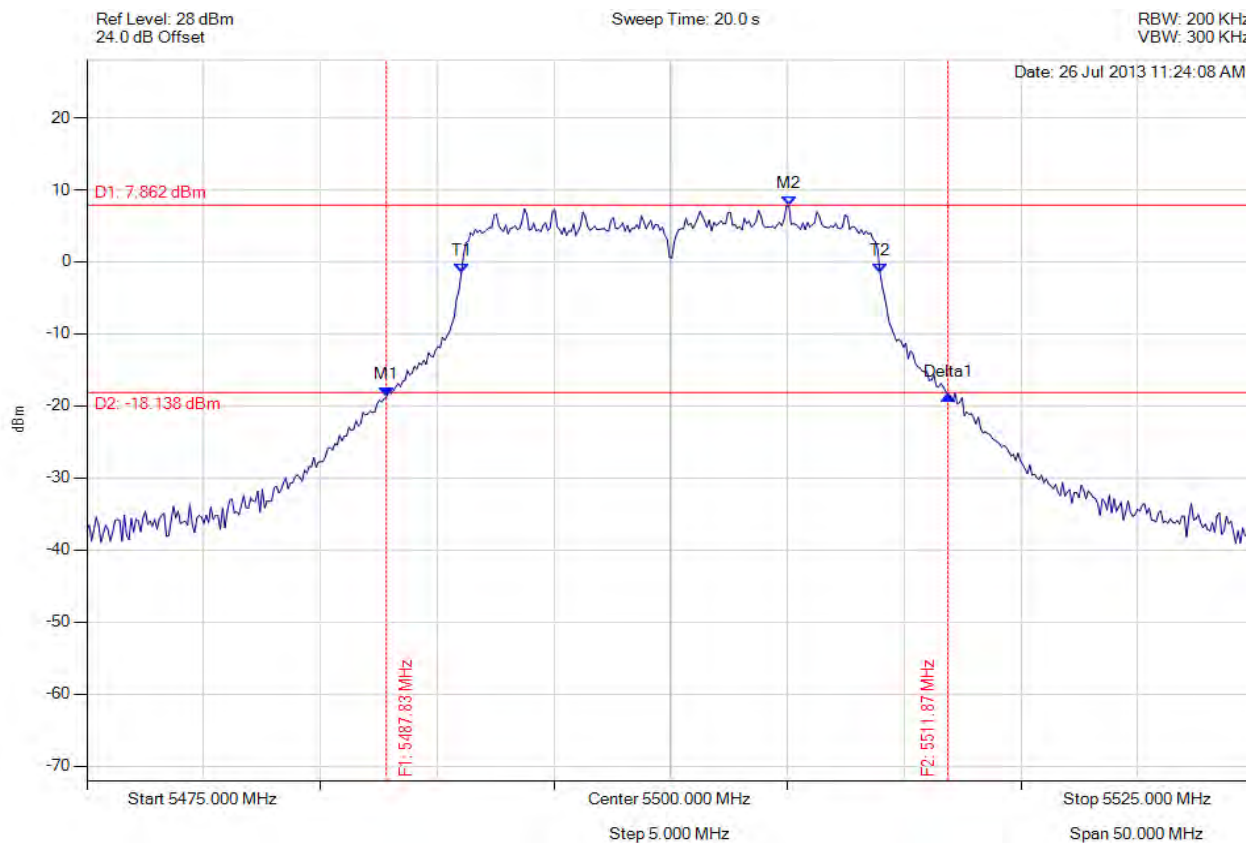

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5487.826 MHz : -18.790 dBm M2 : 5505.060 MHz : 7.862 dBm Delta1 : 24.048 MHz : 0.327 dB T1 : 5491.032 MHz : -1.546 dBm T2 : 5508.968 MHz : -1.565 dBm OBW : 17.936 MHz	Measured 26 dB Bandwidth: 24.048 MHz Measured 99% Bandwidth: 17.936 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 245 of 407



**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-20, Channel: 5500.00 MHz, Chain c, Temp: Ambient, Voltage: 5 Vdc

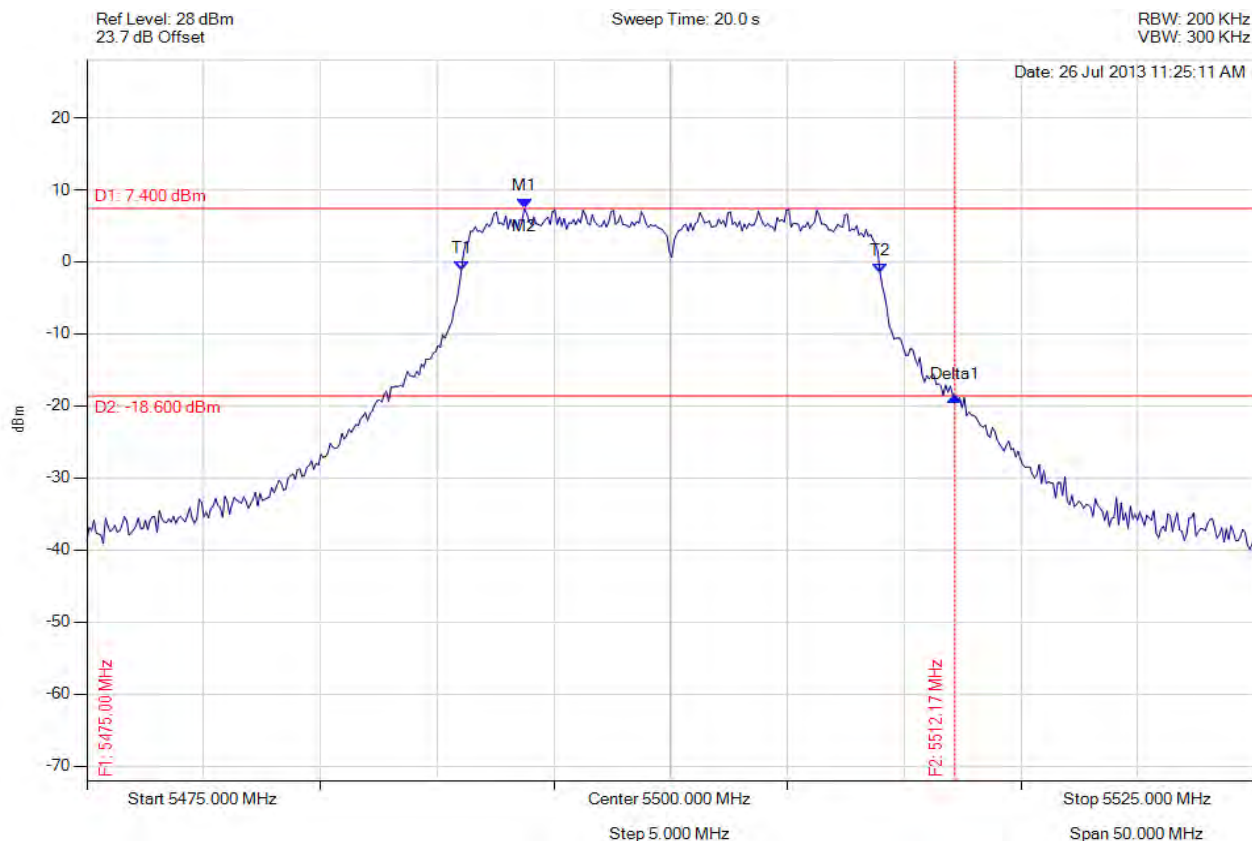

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5487.721 MHz : 7.400 dBm M2 : 5493.737 MHz : 7.400 dBm Delta1 : 5512.17 MHz : -26.099 dB T1 : 5491.032 MHz : -1.235 dBm T2 : 5508.968 MHz : -1.514 dBm OBW : 17.936 MHz	Measured 26 dB Bandwidth: 24.449 MHz Measured 99% Bandwidth: 17.936 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-20, Channel: 5580.00 MHz, Chain a, Temp: Ambient, Voltage: 5 Vdc

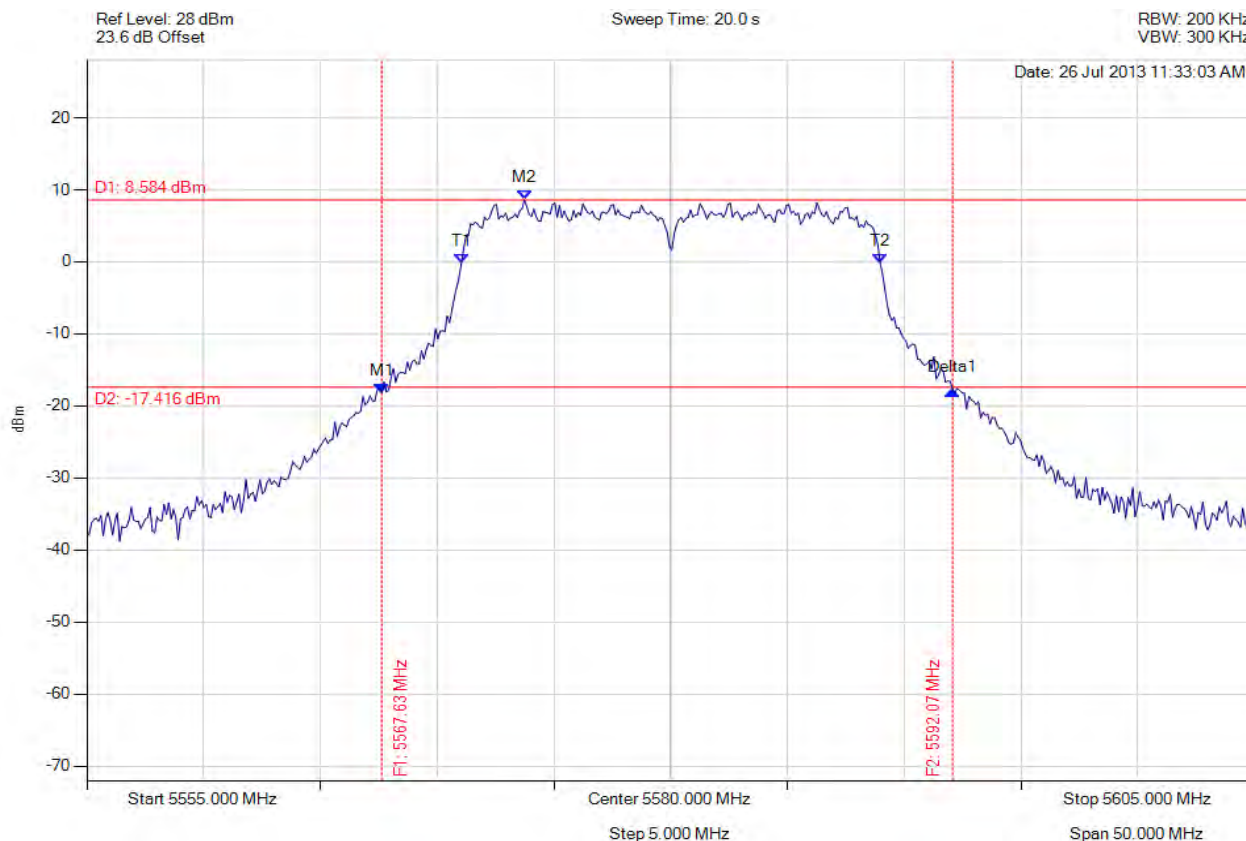

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5567.625 MHz : -18.180 dBm M2 : 5573.737 MHz : 8.584 dBm Delta1 : 24.449 MHz : 0.380 dB T1 : 5571.032 MHz : -0.257 dBm T2 : 5588.968 MHz : -0.133 dBm OBW : 17.936 MHz	Measured 26 dB Bandwidth: 24.449 MHz Measured 99% Bandwidth: 17.936 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 247 of 407



**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-20, Channel: 5580.00 MHz, Chain b, Temp: Ambient, Voltage: 5 Vdc

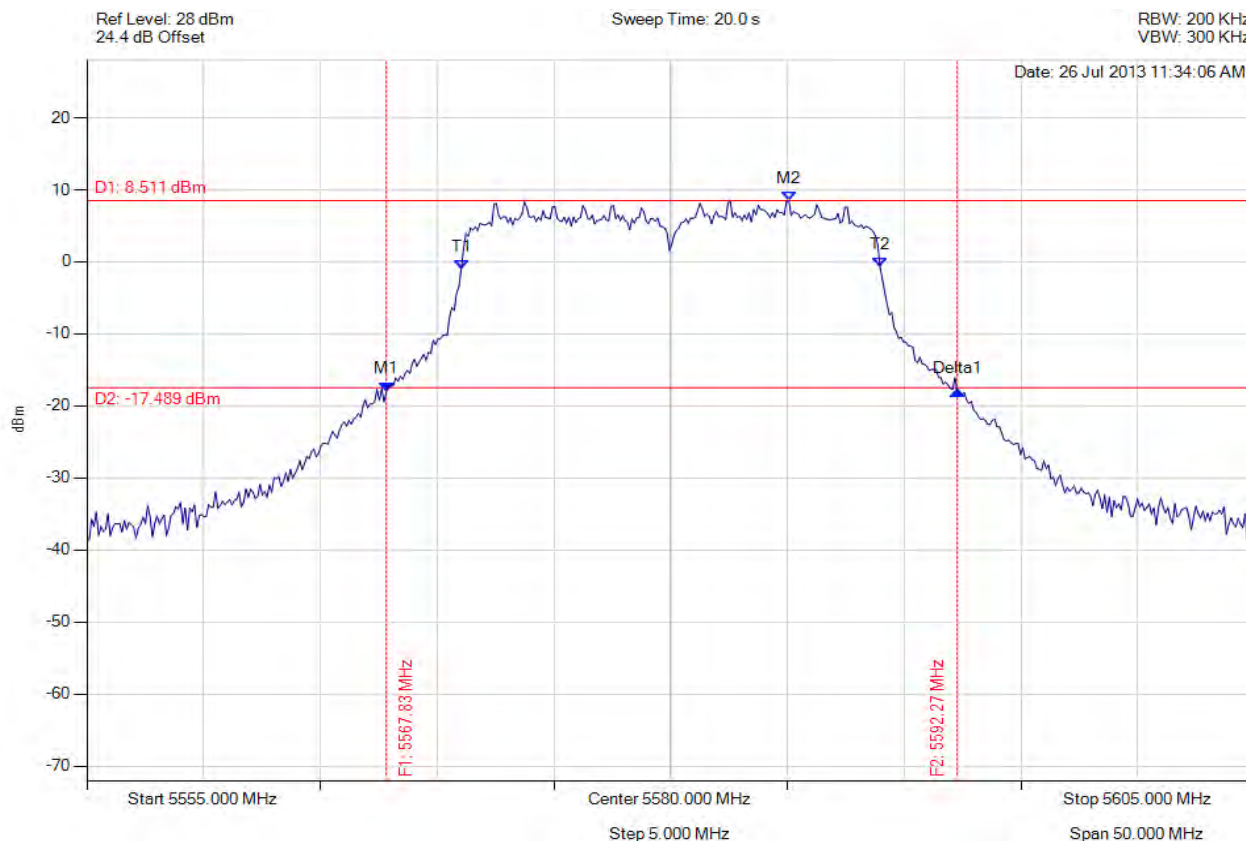

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5567.826 MHz : -17.969 dBm M2 : 5585.060 MHz : 8.511 dBm Delta1 : 24.449 MHz : 0.055 dB T1 : 5571.032 MHz : -0.981 dBm T2 : 5588.968 MHz : -0.751 dBm OBW : 17.936 MHz	Measured 26 dB Bandwidth: 24.449 MHz Measured 99% Bandwidth: 17.936 MHz

[Back to the Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-20, Channel: 5580.00 MHz, Chain c, Temp: Ambient, Voltage: 5 Vdc

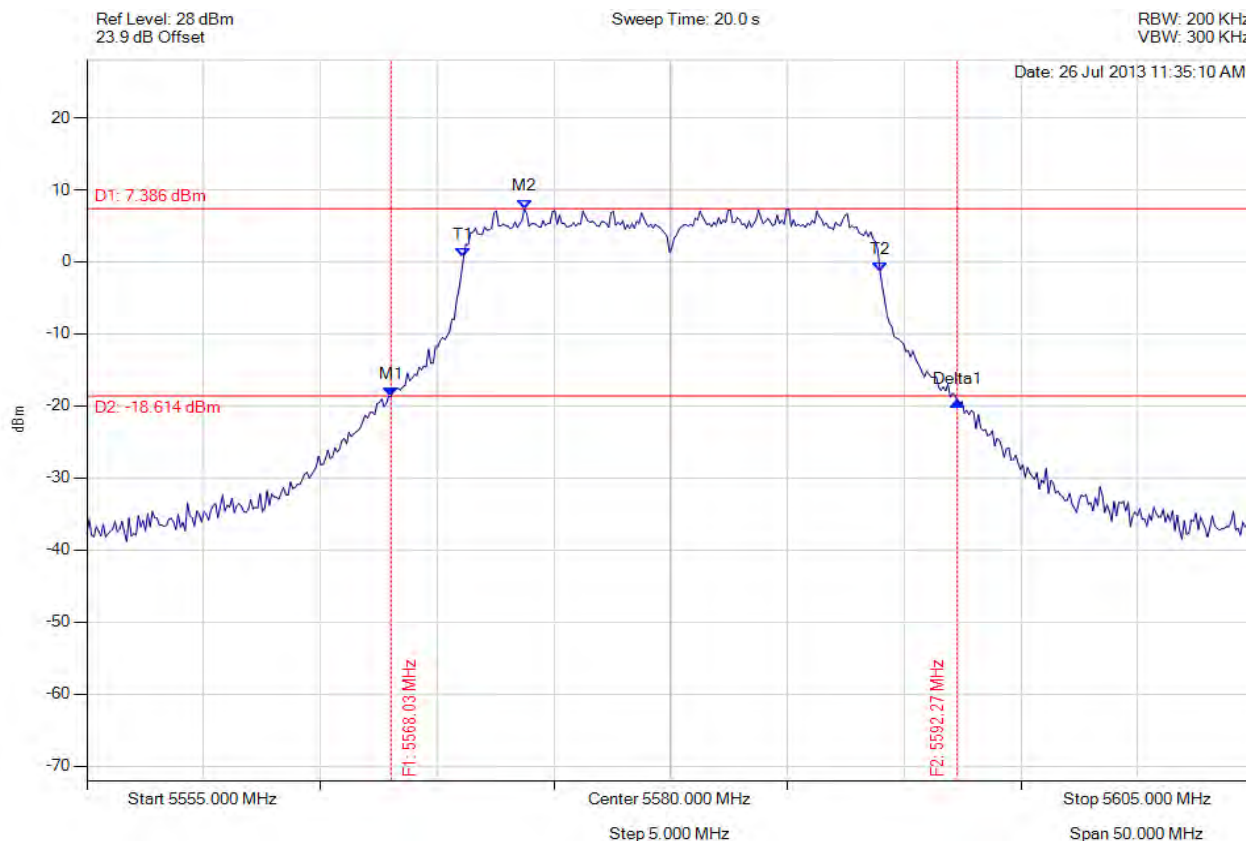

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5568.026 MHz : -18.744 dBm M2 : 5573.737 MHz : 7.386 dBm Delta1 : 24.248 MHz : -0.578 dB T1 : 5571.132 MHz : 0.683 dBm T2 : 5588.968 MHz : -1.365 dBm OBW : 17.836 MHz	Measured 26 dB Bandwidth: 24.248 MHz Measured 99% Bandwidth: 17.836 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 249 of 407



### 26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5700.00 MHz, Chain a, Temp: Ambient, Voltage: 5 Vdc

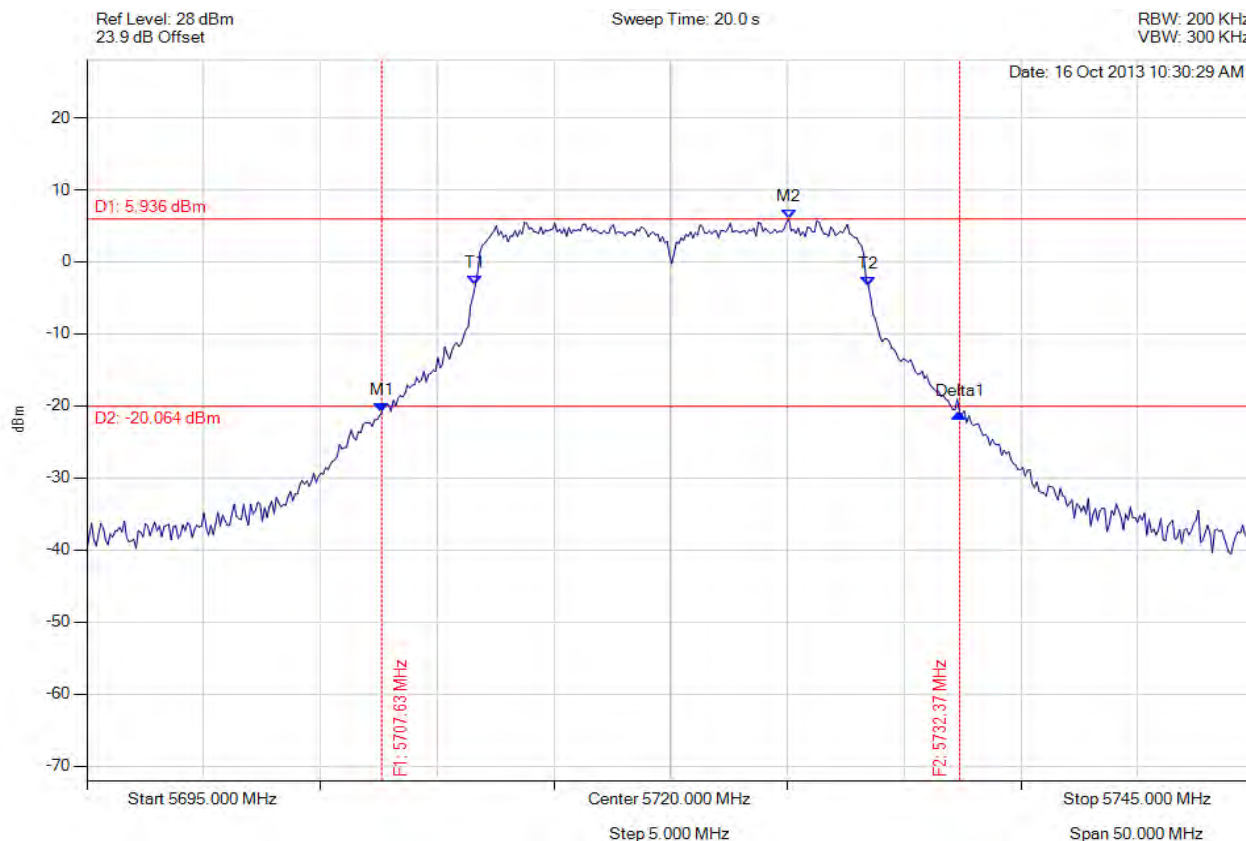

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5707.625 MHz : -20.922 dBm M2 : 5725.060 MHz : 5.936 dBm Delta1 : 24.749 MHz : -0.077 dB T1 : 5711.633 MHz : -3.196 dBm T2 : 5728.467 MHz : -3.344 dBm OBW : 16.834 MHz	Measured 26 dB Bandwidth: 24.749 MHz Measured 99% Bandwidth: 16.834 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.






**Title:** Hewlett Packard MRLBB-1303 Wireless Module  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HPWD41-U6 Rev B  
**Issue Date:** 16th October 2013  
**Page:** 250 of 407



**26 dB & 99% BANDWIDTH**

Variant: 802.11n HT-20, Channel: 5700.00 MHz, Chain b, Temp: Ambient, Voltage: 5 Vdc

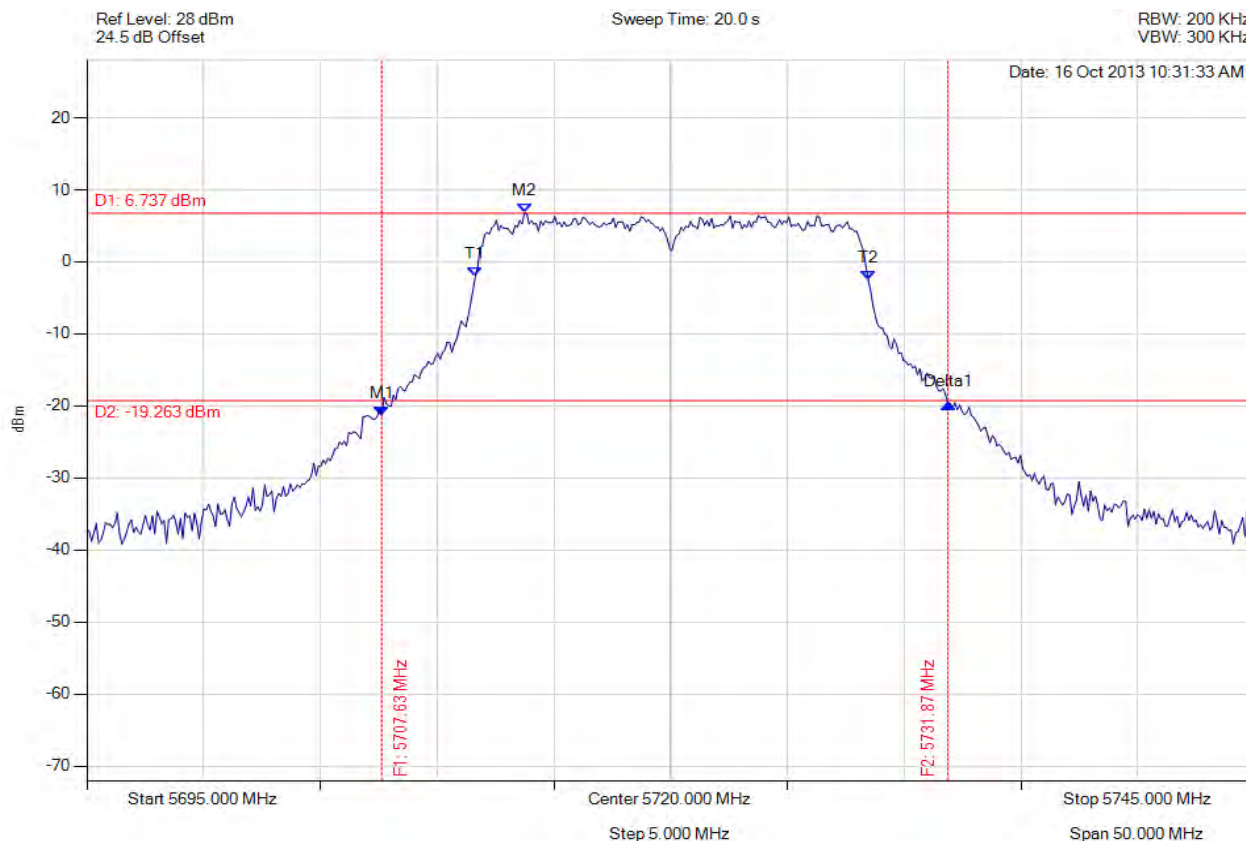

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5707.625 MHz : -21.329 dBm M2 : 5713.737 MHz : 6.737 dBm Delta1 : 24.248 MHz : 1.676 dB T1 : 5711.633 MHz : -2.020 dBm T2 : 5728.467 MHz : -2.600 dBm OBW : 16.834 MHz	Measured 26 dB Bandwidth: 24.248 MHz Measured 99% Bandwidth: 16.834 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.