

The Test Report issued under the responsibility of:
Greatwall International Approval Co., Limited
Unit 04,7/F,Bright Way Tower, No.33 Mong
Kok Road, Kowloon, Hong Kong
Tel:00852-69425539 Fax: 00852-35902333



Report No.: E86.12.361.009

This Test Report is Prepared for

ShenZhen Fujikam Industry Development Co., Ltd

6F.West,1st Building,Innovative Industrial Park,Nanshan Cloud Valley,No.1183,Liuxian Avenue,Nanshan District,SZ,CN.

Product Name:	Cloud Camera

Model No.: FI-360W;FI-360WP;FI-361;FI-361N;FI-362

Brand Name: FUJIKAM

Applicable standards: FCC Part 15 Subpart C, Paragraph 15.247

Test result: The FCC testing has been performed on the submitted samples and found in compliance with

ANSI 63.4-2003 and FCC Part15.247

Prepared by:

Shirley Xu Assistant

Reviewer: Many Hany

Mary Huang/Supervisor

Approved & Authorized Signer:

Mike Wang/ Manager

Note: This report shall not be reproduced except in full, without the written approval of Greatwall International Approval Co., Ltd. This document may be altered or revised by Greatwall International Approval Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample

Page 2 of 98

Report No: E86.12.361.009

Date: 2012-12-24



Test Report Conclusion

Content

1.0	General Details	3
1.1	Test Lab Details.	3
1.2	Applicant Details	3
1.3	Description of EUT	3
2.0	List of Measurement Equipment	4
3.0	Technical Details	5
3.1	Summary of Test Results.	6
3.2	Test Standards	6
4.0	EUT Modification.	6
5.0	Power Line Conducted Emission Test.	7
5.1	Schematics of the Test.	7
5.2	Test Method and Test Procedure.	7
5.3	Configuration of the EUT.	7
5.4	EUT Operating Condition.	8
5.5	Conducted Emission Limit.	8
5.6	Test Result.	8
6.0	Radiated Emission test.	11
6.1	Test Method and Test Procedure.	11
6.2	Configuration of the EUT.	11
6.3	EUT Operation Condition.	11
6.4	Radiated Emission Limit.	12
7.0	6dB Bandwidth Measurement.	35
8.0	Maximum Peak Output Power.	54
9.0	Power Spectral Density Measurement.	57
10.0	Out of Band Measurement.	76
11.0	Antenna Requirement.	87
12.0	FCC ID Label	88
13.0	Photo of Test Setup and EUT View.	89

Report No: E86.12.361.009 Page 3 of 98

Date: 2012-12-24



1. General Information

1.1 Details of Applicant

Name: ShenZhen Fujikam Industry Development Co., Ltd

Address: 6F.West,1st Building,Innovative Industrial Park,Nanshan Cloud Valley,No.1183,Liuxian Avenue,Nanshan District,SZ,CN.

1. 2 Application Details

Date of Receipt of Application: Nov 30, 2012 Date of Receipt of Test Item: Nov 30, 2012 Date of Test: Nov 30, 2012~ Dec 22, 2012

1.3 General Description of EUT

Product Name:	Cloud Camera
Model No.:	FI-360W;FI-360WP;FI-361;FI-361N;FI-362
Brand Name;	FUJIKAM
Operation Frequency:	2422-2452 MHz for 802.11n HT40 and 2412-2462MHz for 802.11b/g, 802.11n HT20
Channel number:	IEEE 802.11b/g/n (HT20): 11 Channels
	IEEE 802.11n HT40 : 7 Channels
Channel separation:	IEEE 802.11b/g/n (HT20/40) : 5MHz
Modulation Technology:	IEEE 802.11b : DSSS (CCK, QPSK, DBPSK)
	IEEE 802.11g/n (HT20/HT40) : OFDM(64QAM, 16QAM, QPSK, BPSK)
Air Data Rate	IEEE 802.11b : 11, 5.5, 2, 1 Mbps
	IEEE 802.11g: 54, 48,36, 24, 18, 12, 9, 6 Mbps
	IEEE 802.11n HT20: 150, 117, 104, 78, 65, 58.5, 52, 39, 26, 19.5, 13, 6 Mbps
	IEEE 802.11n HT40: 150, 117, 104, 78, 65, 58.5, 52, 39, 26, 19.5, 13, 6 Mbps
Antenna Type:	Dipole antennas
Antenna gain:	3.0dBi
Power supply:	DC5V
Remark:	
FCC ID:	RU6-36IPC

Page 4 of 98

Report No: E86.12.361.009

Date: 2012-12-24



2.0	Test Equipments					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date	
Spectrum Analyzer	Agilent	E4408B	MY46185649	2012-10-31	2013-10-30	
Receiver	RS	ESCI	100492	2012-10-31	2013-10-30	
Receiver	RS	ESCI	100202	2012-10-31	2013-10-30	
Bilog Antenna	SCHWARZBECK	VULB 9168	9168-438	2012-02-12	2013-02-11	
LISN	SCHWARZBECK	NSLK 8126	8126466	2012-10-31	2013-10-30	
Loop Antenna	RS	FMZB1516	1516131	2012-02-12	2013-02-11	
ETS Horn Antenna	ETS	3160	SEL0076	2012-02-12	2013-02-11	
Cable	Resenberger	N/A	N0.1	2012-10-31	2013-10-30	
Cable	SCHWARZBECK	N/A	N0.2	2012-10-31	2013-10-30	
Cable	SCHWARZBECK	N/A	N0.3	2012-10-31	2013-10-30	
Power Meter	Anritsu	K240C	020346	2012-10-31	2013-10-30	
Horn Antenna	EMCO	3115	640201028-06	2012-02-12	2013-02-11	
9*6*6 Anechoic	ETS-LINDGREN		SEL0017	2012-10-31	2013-10-30	
Pre-amplifier	Schwarebeck	BBV9743	9743-019	2012-10-31	2013-10-30	
Pre-amplifier	KUAITE	AFS33-18002 650-30-8P-44	SEL0080	2012-10-31	2013-10-30	

Page 5 of 98

Report No: E86.12.361.009

Date: 2012-12-24



3. DESCRIPTION OF TEST MODES

IEEE 802.11b, 802.11g, 802.11n (HT20) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 11Mbps data rate (worst case) was chosen for full testing. IEEE 802.11g mode: 54Mbps data rate (worst case) was chosen for full testing. IEEE 802.11n (HT20) mode: 65Mbps data rate (worst case) were chosen for full testing

IEEE 802.11n HT40

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2422
Mid	2437
High	2452

IEEE 802.11n HT40 mode: 65Mbps data rate (worst case) was chosen for full testing.

The worst-case data rates are determined according to the description above, based on the investigations by measuring the PSD and average power across all the data rates, bandwidths, modulations and spatial stream modes.

Date: 2012-12-24



3.0 Technical Details

3.1 Summary of test results

The EUT has	been tested	l according	to the fol	lowing specifica	ations:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.107 & 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz	PASS	Complies
FCC Part 15, Paragraph 15.247(b)	Maximum peak output power Limit: max. 30dBm	PASS	Complies
FCC Part 15, Paragraph 15.109,15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	PASS	Complies
FCC Part 15, Paragraph 15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Complies
FCC Part 15, Paragraph 15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit: Table 15,209	PASS	Complies

3.2 Test Standards

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 Test Lab Details

Name: Shenzhen Certification Technology Service Co., Ltd

Address: 2F, Building B, East Area of Nanchang Second Industrial Zone, Gushu 2nd Road, Bao'an District,

Shenzhen 518126, P.R. China.

FCC Registration Number: 197647

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2012-12-24



5. Power Line Conducted Emission Test

5.1 Schematics of the test

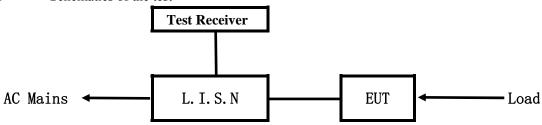


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2003.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

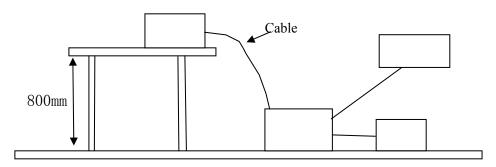

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2003. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device Manufacturer		Model	FCC ID
C11 C	ShenZhen Fujikam Industry	FI-360W; FI-360WP; FI-361;	RU6-36IPC
Cloud Camera	Development Co., Ltd	FI-361N; FI-362	KU0-301FC

Report No: E86.12.361.009 Page 8 of 98

Date: 2012-12-24



B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable
N/A				

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2003.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207.

Frequency		Class A Limits (dB µ V)		Class B Limits (dB \(\mu \) V)	
	(MHz)	Quasi-peak Level Average Level		Quasi-peak Level	Average Level
	0.15 ~ 0.50	79.0	66.0	66.0~56.0*	56.0~46.0*
	$0.50 \sim 5.00$	73.0	60.0	56.0	46.0
	5.00 ~ 30.00	73.0	60.0	60.0	50.0

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2012-12-24



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

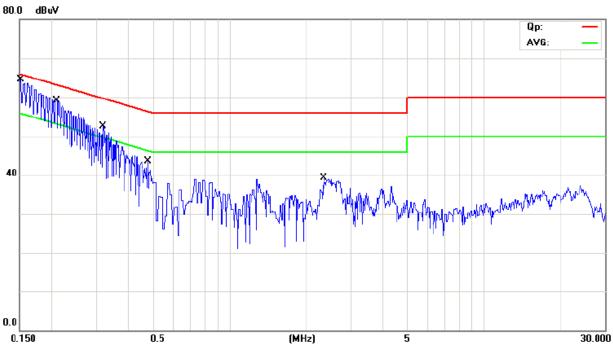

Frequency	Line	Reading(dBµV)		Limit(dBµV)	
(MHz)	Line	Quasi-peak	Average	Quasi-peak	Average
0.150	Live	51.30	35.80	65.96	55.96
0.209	Live	44.06	29.76	63.23	53.23
0.318	Live	38.98	19.58	59.76	49.76
0.477	Live	31.05	19.15	56.38	46.38
2.343	Live	31.04	14.74	56.00	46.00

Date: 2012-12-24



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

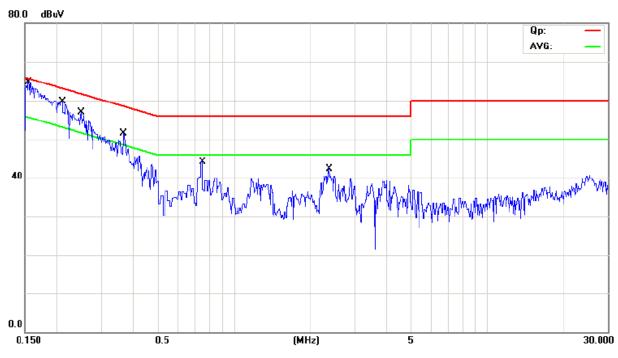

Frequency	Line	Reading(dBµV)		Limit(dBµV)	
(MHz)	LIIIC	Quasi-peak	Average	Quasi-peak	Average
0.154	Neutral	51.80	34.80	65.75	55.75
0.209	Neutral	44.76	29.06	63.22	53.22
0.249	Neutral	42.31	33.81	61.77	51.77
0.367	Neutral	41.13	23.33	58.57	48.57
0.744	Neutral	34.16	30.53	56.00	46.00
2.376	Neutral	32.35	14.45	56.00	46.00

Date: 2012-12-24



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Distance = 3m Computer Pre -Amplifier Turn-table Receiver

6.2 Configuration of The EUT
Same as section 5.3 of this report

Block diagram of Test setup

6.3 EUT Operating Condition
Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Ground Plane

This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: E86.12.361.009 Page 12 of 98

Date: 2012-12-24



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209

	-	
Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT

Report No: E86.12.361.009 Page 13 of 98

Date: 2012-12-24



Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep transmitting

Results: Pass


Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
110.025	36.48	Н	43.50
267.650	35.20	Н	46.00
531.975	34.96	Н	46.00
110.025	35.50	V	43.50
134.275	33.71	V	43.50
267.650	30.73	V	46.00
531.025	41.62	V	46.00

Date: 2012-12-24




Test Figure:

H

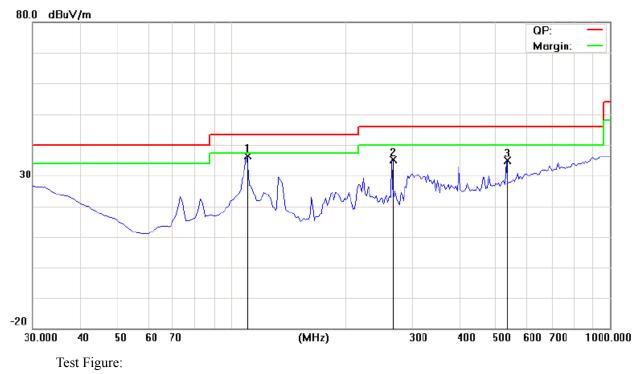

V

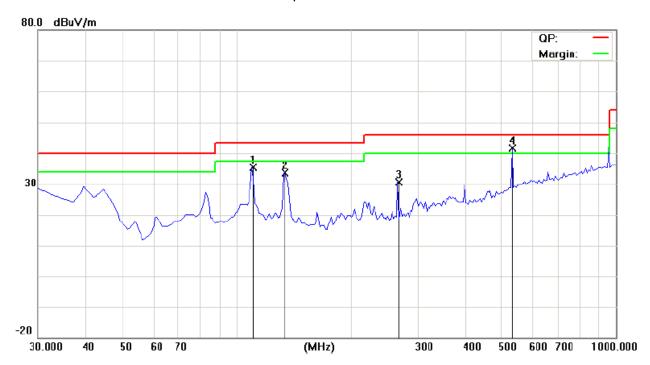

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: E86.12.361.009 Page 15 of 98

Date: 2012-12-24



Operation Mode: Transmitting & Receiving under CH01 for 11g at 54Mbps

			1
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
2412.00	92.39 (PK)	Н	Fundamental Frequency
2412.00	93.69 (PK)	V	rundamentai riequency
4824.00	47.28 (PK)	Н	74(Peak)/ 54(AV)
4824.00	45.89 (PK)	V	74(Peak)/ 54(AV)
7236.00	1	H/V	74(Peak)/ 54(AV)
9648.00	-	H/V	74(Peak)/ 54(AV)
12060	-	H/V	74(Peak)/ 54(AV)
14472	-	H/V	74(Peak)/ 54(AV)
16884		H/V	74(Peak)/ 54(AV)
19296		H/V	74(Peak)/ 54(AV)
21708		H/V	74(Peak)/ 54(AV)
24120		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode 54Mbps

Date: 2012-12-24



Operation Mode: Transmitting & Receiving under CH06 for 11g at 54Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
2437.00	92.97 (PK)	Н	Zimi(@zim (#Z i ++im)
2437.00		П	Fundamental Frequency
2437.00	94.44 (PK)	V	
4874.00	45.47 (PK)	Н	74(Peak)/ 54(AV)
4874.00	47.32 (PK)	V	74(Peak)/ 54(AV)
7311.00		H/V	74(Peak)/ 54(AV)
9748.00		H/V	74(Peak)/ 54(AV)
12185		H/V	74(Peak)/ 54(AV)
14622		H/V	74(Peak)/ 54(AV)
17059		H/V	74(Peak)/ 54(AV)
19496		H/V	74(Peak)/ 54(AV)
21933		H/V	74(Peak)/ 54(AV)
24370		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode 54 Mbps

Operation Mode: Transmitting & Receiving under CH11 for 11g at 54Mbps

	8	0	1
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
2462.00	93.43 (PK)	Н	Fundamental Frequency
2462.00	93.36 (PK)	V	Fundamental Frequency
4924	47.58 (PK)	Н	74(Peak)/ 54(AV)
4924	45.36 (PK)	V	74(Peak)/ 54(AV)
7386		H/V	74(Peak)/ 54(AV)
9848		H/V	74(Peak)/ 54(AV)
12310		H/V	74(Peak)/ 54(AV)
14772		H/V	74(Peak)/ 54(AV)
17234		H/V	74(Peak)/ 54(AV)
19696		H/V	74(Peak)/ 54(AV)
22158		H/V	74(Peak)/ 54(AV)
24620		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode at 54 Mbps

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2012-12-24




Please refer to the following test plots for details:

CH01 for 11g at 54Mbps: Horizontal

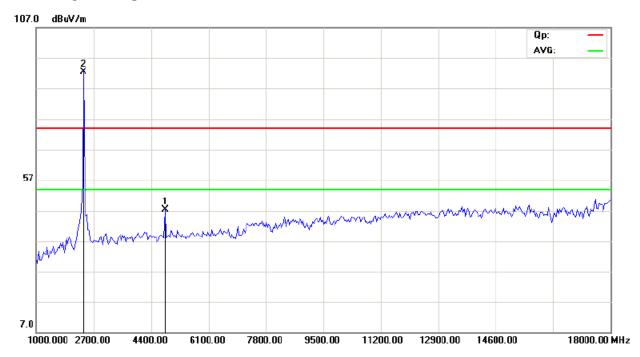

CH01 for 11g at 54Mbps: Vertical

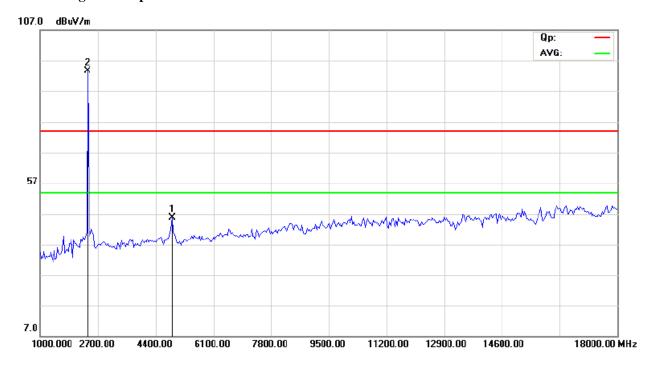


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Date: 2012-12-24



CH06 for 11g at 54Mbps: Vertical

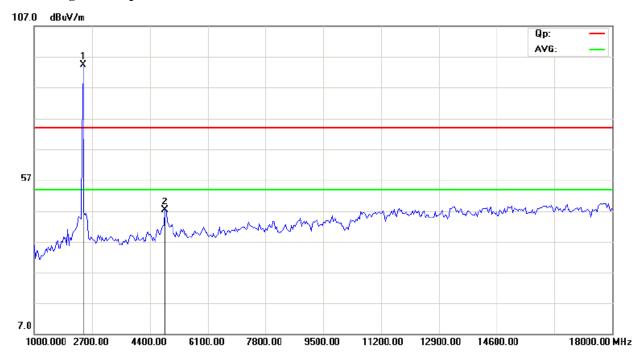

CH06 for 11g at 54Mbps: Horizontal

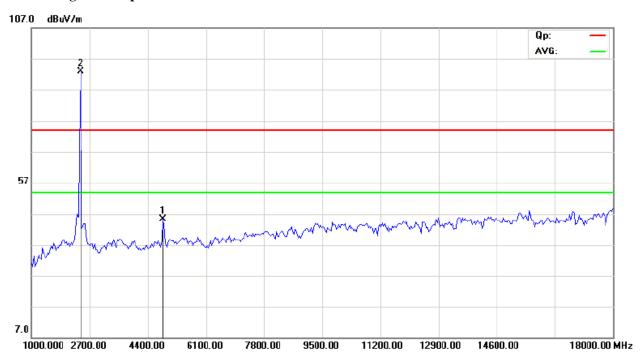


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Date: 2012-12-24



CH11 for 11g at 54Mbps: Vertical

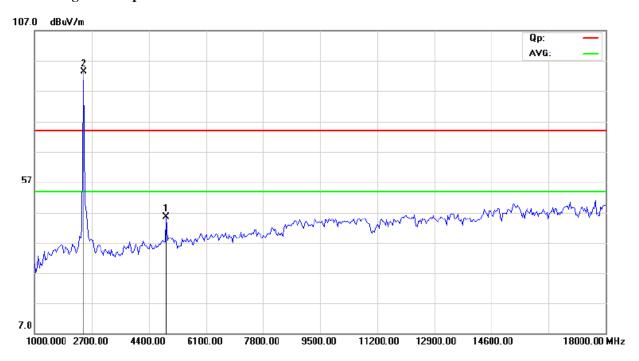

CH11 for 11g at 54Mbps: Horizontal

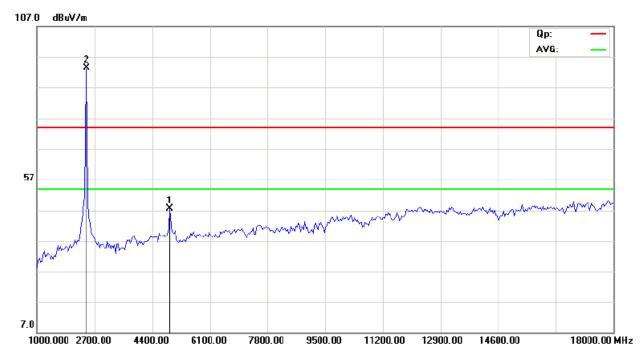

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2012-12-24



Operation Mode: Transmitting & Receiving under CH01 for 11b at 11Mbps

	2 2		•
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
2412.00	92.76 (PK)	Н	Eundamental Eraguenay
2412.00	93.76 (PK)	V	Fundamental Frequency
4824.00	47.32 (PK)	Н	74(Peak)/ 54(AV)
4824.00	44.19 (PK)	V	74(Peak)/ 54(AV)
7236.00		H/V	74(Peak)/ 54(AV)
9648.00		H/V	74(Peak)/ 54(AV)
12060		H/V	74(Peak)/ 54(AV)
14472	-	H/V	74(Peak)/ 54(AV)
16684		H/V	74(Peak)/ 54(AV)
19296		H/V	74(Peak)/ 54(AV)
21708		H/V	74(Peak)/ 54(AV)
24120		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode 11Mbps

Operation Mode: Transmitting & Receiving under CH06 for 11b at 11Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \) V/m)
2437.00	92.63 (PK)	Н	Eundamental Eraguenay
2437.00	96.15 (PK)	V	Fundamental Frequency
4874.00	42.01 (PK)	Н	74(Peak)/ 54(AV)
4874.00	46.50 (PK)	V	74(Peak)/ 54(AV)
7311.00		H/V	74(Peak)/ 54(AV)
9748.00		H/V	74(Peak)/ 54(AV)
12185		H/V	74(Peak)/ 54(AV)
14622		H/V	74(Peak)/ 54(AV)
17059		H/V	74(Peak)/ 54(AV)
19496		H/V	74(Peak)/ 54(AV)
21933		H/V	74(Peak)/ 54(AV)
24370		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode 11Mbps

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: E86.12.361.009 Page 21 of 98

Date: 2012-12-24



Operation Mode: Transmitting & Receiving under CH11 for 11b at 11Mbps

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
2462.00	92.74 (PK)	Н	Fundamental Frequency
2462.00	93.95 (PK)	V	Fundamental Frequency
4924	45.29 (PK)	Н	74(Peak)/ 54(AV)
4924	46.13 (PK)	V	74(Peak)/ 54(AV)
7386	1	H/V	74(Peak)/ 54(AV)
9848	-	H/V	74(Peak)/ 54(AV)
12310		H/V	74(Peak)/ 54(AV)
14772		H/V	74(Peak)/ 54(AV)
17234	1	H/V	74(Peak)/ 54(AV)
19696	-	H/V	74(Peak)/ 54(AV)
22158		H/V	74(Peak)/ 54(AV)
24620		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit


- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode at 11Mbps

Date: 2012-12-24




Please refer to the following test plots for details:

CH01 for 11b at 11Mbps: Horizontal

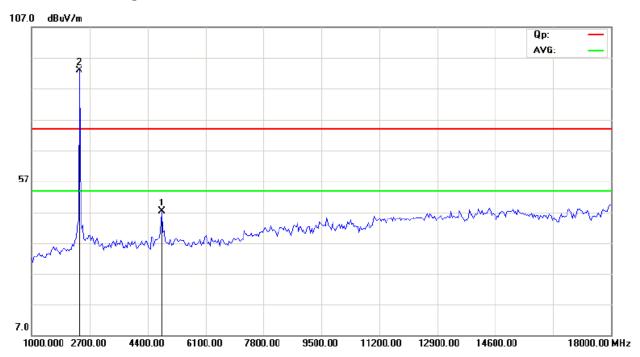

CH01 for 11b at 11Mbps: Vertical

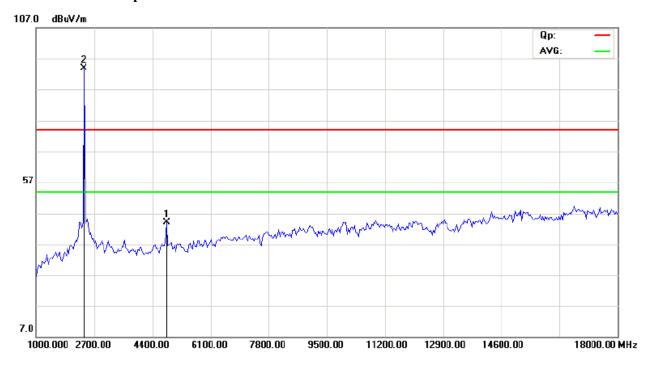


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Date: 2012-12-24



CH06 for 11b at 11Mbps: Vertical

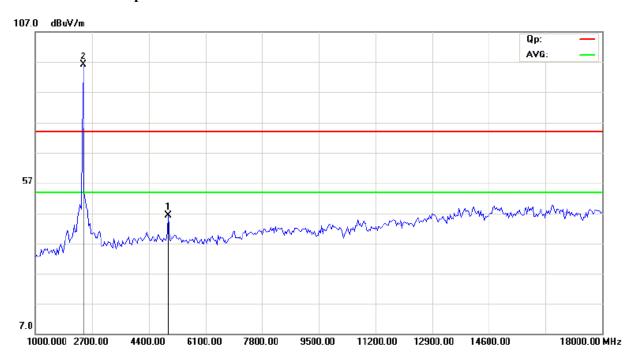

CH06 for 11b at 11Mbps: Horizontal

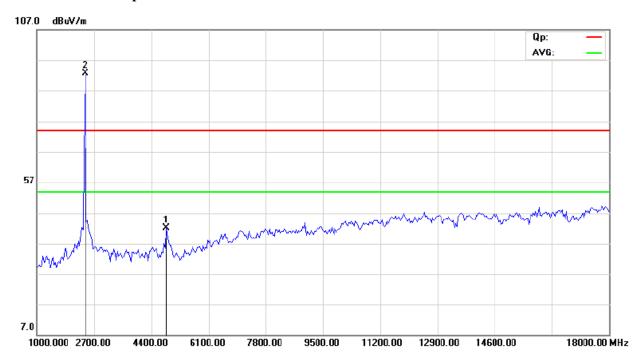


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Date: 2012-12-24



CH11 for 11b at 11Mbps: Vertical

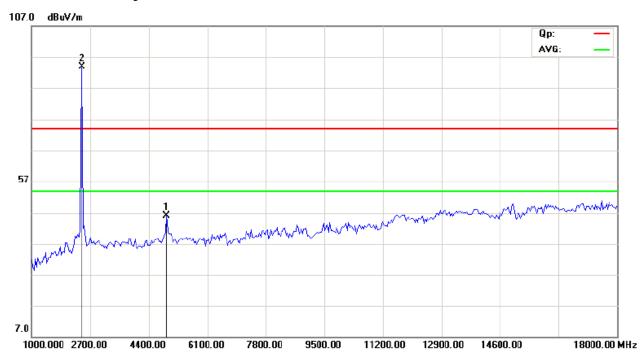

CH11 for 11b at 11Mbps: Horizontal

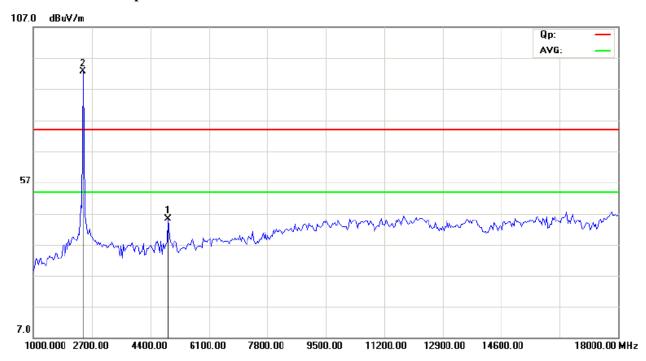

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2012-12-24



Operation Mode: Transmitting & Receiving under CH01 for 11n HT20 at 65Mbps

			-
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
2412.00	90.36 (PK)	Н	Fundamental Frequency
2412.00	92.42 (PK)	V	Fundamental Frequency
4824.00	45.35 (PK)	Н	74(Peak)/ 54(AV)
4824.00	47.09 (PK)	V	74(Peak)/ 54(AV)
7236.00		H/V	74(Peak)/ 54(AV)
9648.00		H/V	74(Peak)/ 54(AV)
12060		H/V	74(Peak)/ 54(AV)
14472		H/V	74(Peak)/ 54(AV)
16684		H/V	74(Peak)/ 54(AV)
19296		H/V	74(Peak)/ 54(AV)
21708		H/V	74(Peak)/ 54(AV)
24120		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode 65Mbps

Operation Mode: Transmitting & Receiving under CH06 for 11n HT20 at 65Mbps

	operation from a final strategy of the certain guidant of the final final strategy				
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)		
2437.00	91.05 (PK)	Н	Even domental Engavenery		
2437.00	92.01 (PK)	V	Fundamental Frequency		
4874.00		Н	74(Peak)/ 54(AV)		
4874.00		V	74(Peak)/ 54(AV)		
7311.00		H/V	74(Peak)/ 54(AV)		
9748.00		H/V	74(Peak)/ 54(AV)		
12185		H/V	74(Peak)/ 54(AV)		
14622		H/V	74(Peak)/ 54(AV)		
17059		H/V	74(Peak)/ 54(AV)		
19496		H/V	74(Peak)/ 54(AV)		
21933		H/V	74(Peak)/ 54(AV)		
24370		H/V	74(Peak)/ 54(AV)		

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode 65Mbps

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: E86.12.361.009 Page 26 of 98

Date: 2012-12-24



Operation Mode: Transmitting & Receiving under CH11 for 11n HT20 at 65Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)	
2462.00	91.12 (PK)	Н	Fundamental Frequency	
2462.00	90.31 (PK)	V	Fundamental Frequency	
4924	45.69 (PK)	Н	74(Peak)/ 54(AV)	
4924	45.14 (PK)	V	74(Peak)/ 54(AV)	
7386		H/V	74(Peak)/ 54(AV)	
9848		H/V	74(Peak)/ 54(AV)	
12310		H/V	74(Peak)/ 54(AV)	
14772		H/V	74(Peak)/ 54(AV)	
17234		H/V	74(Peak)/ 54(AV)	
19696		H/V	74(Peak)/ 54(AV)	
22158		H/V	74(Peak)/ 54(AV)	
24620		H/V	74(Peak)/ 54(AV)	

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit


- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode 65Mbps

Date: 2012-12-24




Please refer to the following test plots for details:

CH01 for 11n HT20 at 65Mbps: Horizontal

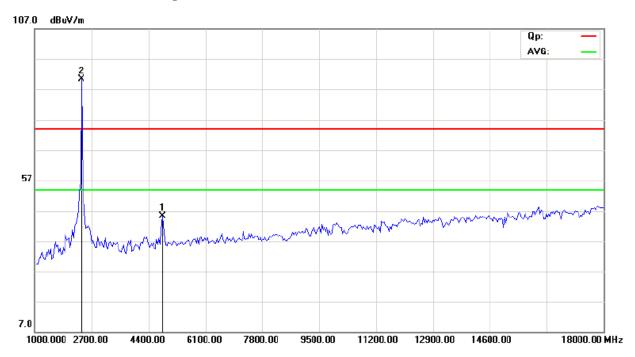

CH01 for 11n HT20 at 65Mbps: Vertical

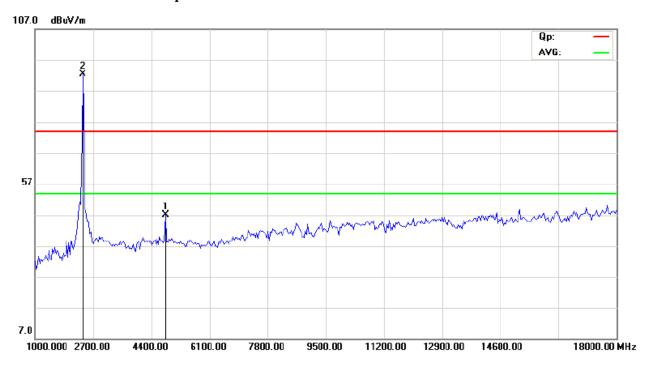

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Page 28 of 98

Report No: E86.12.361.009


Date: 2012-12-24



CH06 for 11n HT20 at 65Mbps: Vertical

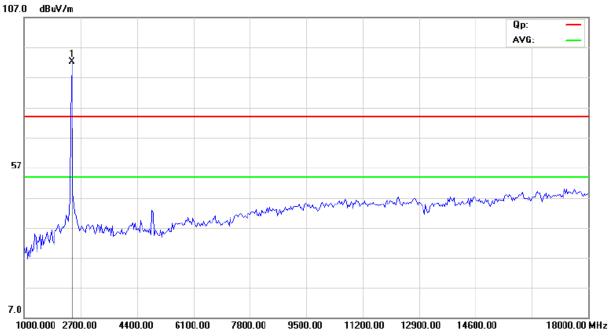

CH06 for 11n HT20 at 65Mbps: Horizontal

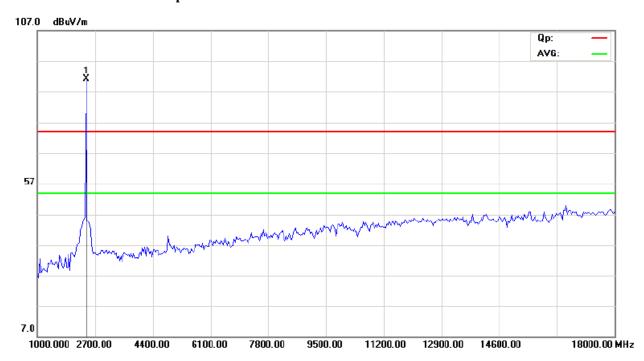


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Date: 2012-12-24



CH11 for 11n HT20 at 65Mbps: Vertical

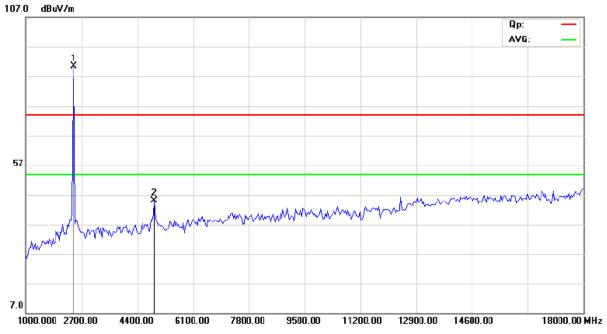

CH11 for 11n HT20 at 65Mbps: Horizontal

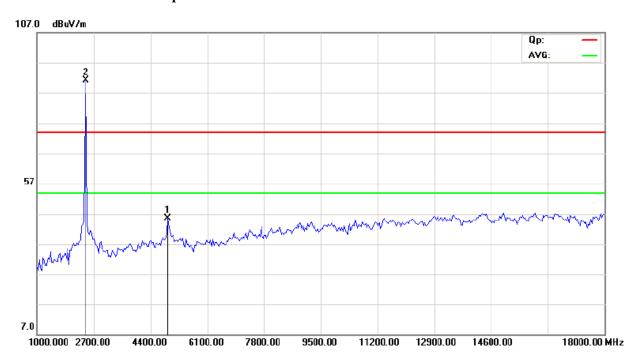

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2012-12-24



Operation Mode: Transmitting & Receiving under CH01 for 11n HT40 at 65Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)	
2422.00	90.01 (PK)	Н	Fundamental Frequency	
2422.00	89.94 (PK)	V	Fundamental Frequency	
4844.00	44.01 (PK)	Н	74(Peak)/ 54(AV)	
4844.00	49.77 (PK)	V	74(Peak)/ 54(AV)	
7266.00		H/V	74(Peak)/ 54(AV)	
9688.00		H/V	74(Peak)/ 54(AV)	
12110		H/V	74(Peak)/ 54(AV)	
14532		H/V	74(Peak)/ 54(AV)	
16954		H/V	74(Peak)/ 54(AV)	
19376		H/V	74(Peak)/ 54(AV)	
21798		H/V	74(Peak)/ 54(AV)	
24220		H/V	74(Peak)/ 54(AV)	

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT40) mode 65Mbps

Operation Mode: Transmitting & Receiving under CH04 for 11n HT40 at 65Mbps

operation from the arrange of the control of the first than the control of the co					
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)		
2437.00	2437.00 90.22 (PK)		Eundamental Eragueney		
2437.00	91.65 (PK)	V	Fundamental Frequency		
4874.00		Н	74(Peak)/ 54(AV)		
4874.00	44.53 (PK)	V	74(Peak)/ 54(AV)		
7311.00		H/V	74(Peak)/ 54(AV)		
9748.00		H/V	74(Peak)/ 54(AV)		
12185		H/V	74(Peak)/ 54(AV)		
14622		H/V	74(Peak)/ 54(AV)		
17059		H/V	74(Peak)/ 54(AV)		
19496		H/V	74(Peak)/ 54(AV)		
21933		H/V	74(Peak)/ 54(AV)		
24370	24370		74(Peak)/ 54(AV)		

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT40) mode 65Mbps

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: E86.12.361.009 Page 31 of 98

Date: 2012-12-24



Operation Mode: Transmitting & Receiving under CH7 for 11n HT40 at 65Mbps

Frequency (MHz)	(MHz) Level@3m (dB \(\mu \) V/m) Antenna Polarit		Limit@3m (dB \(\mu \)V/m)	
2452.00	91.60 (PK)	Н	Г., 1,, 1, Г.,	
2452.00	88.19 (PK)	V	Fundamental Frequency	
4904	46.23 (PK)	Н	74(Peak)/ 54(AV)	
4904		V	74(Peak)/ 54(AV)	
7356		H/V	74(Peak)/ 54(AV)	
9808		H/V	74(Peak)/ 54(AV)	
12260		H/V	74(Peak)/ 54(AV)	
14712		H/V	74(Peak)/ 54(AV)	
17164		H/V	74(Peak)/ 54(AV)	
19616		H/V	74(Peak)/ 54(AV)	
22068		H/V	74(Peak)/ 54(AV)	
24520		H/V	74(Peak)/ 54(AV)	

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit


- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT40) mode 65Mbps

Date: 2012-12-24




Please refer to the following test plots for details:

CH01 for 11n HT40 at 65Mbps: Vertical

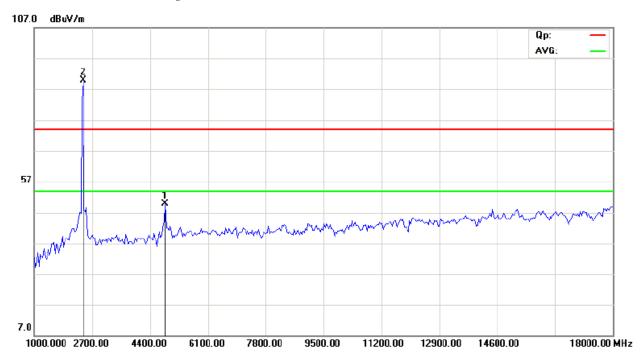

CH01 for 11n HT40 at 65Mbps: Horizontal

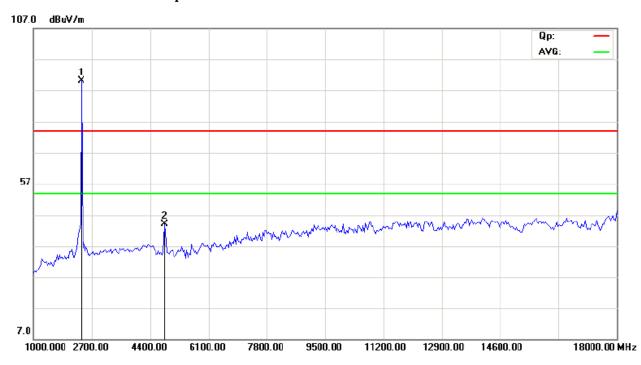


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Date: 2012-12-24



CH04 for 11n HT40 at 65Mbps: Vertical

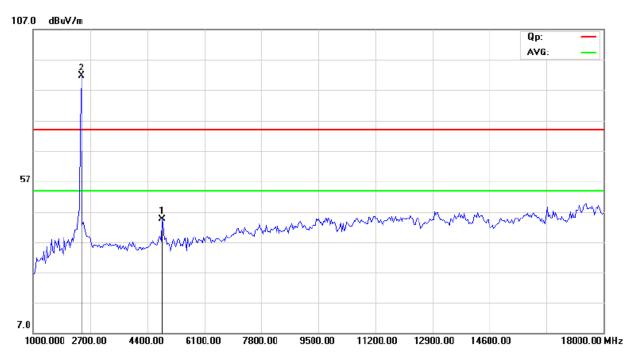

CH04 for 11n HT40 at 65Mbps: Horizontal

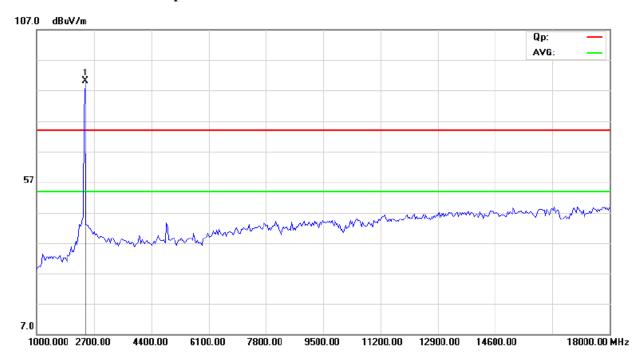


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Date: 2012-12-24



CH07 for 11n HT40 at 65Mbps: Vertical

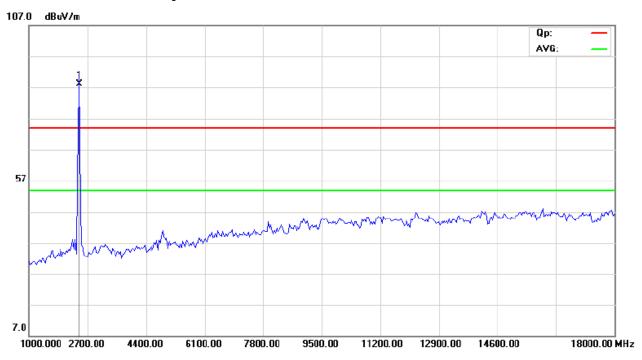

CH07 for 11n HT40 at 65Mbps: Horizontal

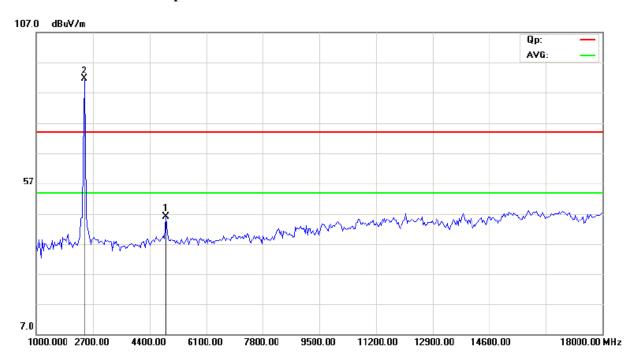

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Report No: E86.12.361.009 Page 35 of 98

Date: 2012-12-24



7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth (VBW) \geq 3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

Page 36 of 98 Report No: E86.12.361.009

Date: 2012-12-24



6dB Occupied Bandwidth

EUT	EUT Cloud Can		nera	a Model		FI-360W;FI-360WP;FI-361;FI-361N;FI-362		
Mode		802.111)	Input Voltage		AC 120V		
Temperat	ure	24 deg.	C,	Humidity		56% RH		
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	Bandwidth (MHz)		num Limit MHz)	Pass/ Fail	
1		2412	1	10.08		0.5	Pass	
6		2437	1	10.08		0.5	Pass	
11		2462	1	9.36		0.5	Pass	
1		2412	11	9.60		0.5	Pass	
6		2437	11	9.42		0.5	Pass	
11		2462	11	9.36		0.5	Pass	


Page 37 of 98

Report No: E86.12.361.009

Date: 2012-12-24



1. 802.11b at 1Mbps of CH01

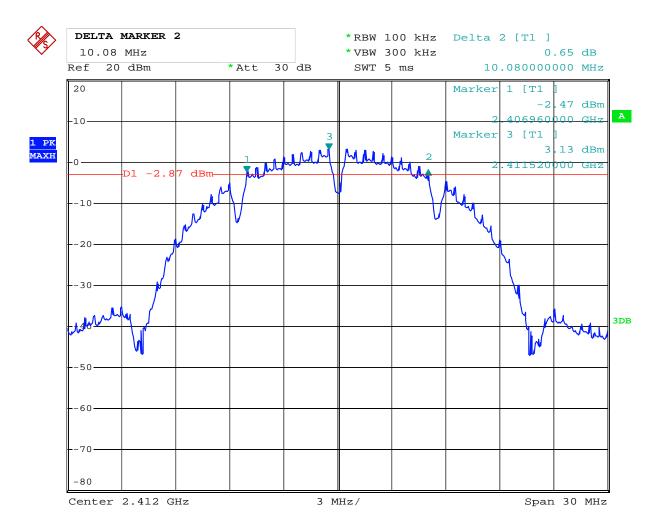

Date: 22.DEC.2012 14:29:58


Page 38 of 98

Report No: E86.12.361.009

Date: 2012-12-24



2. 802.11b at 1Mbps of CH06

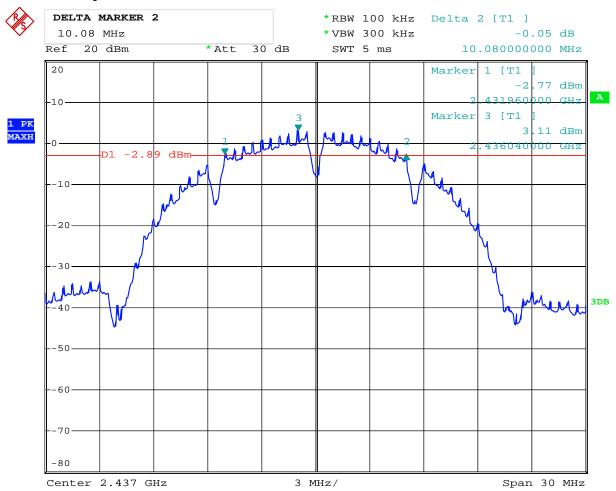

Date: 22.DEC.2012 14:32:15


Page 39 of 98

Report No: E86.12.361.009

Date: 2012-12-24



3. 802.11b at 1Mbps of CH11

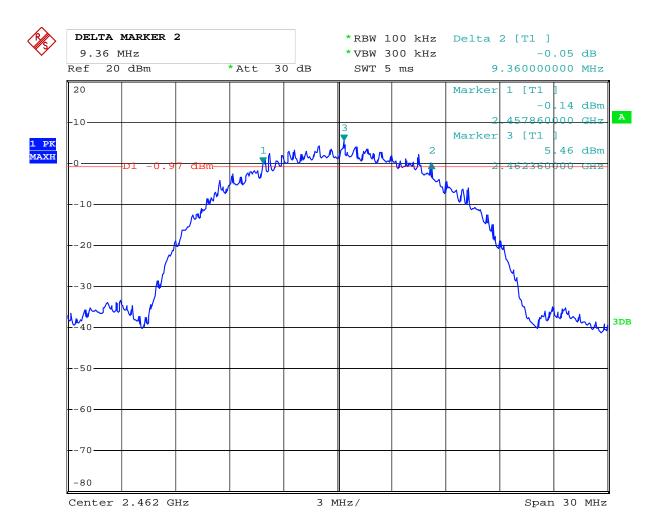

Date: 22.DEC.2012 14:34:46


Page 40 of 98

Report No: E86.12.361.009

Date: 2012-12-24



4. 802.11b at 11Mbps of CH01

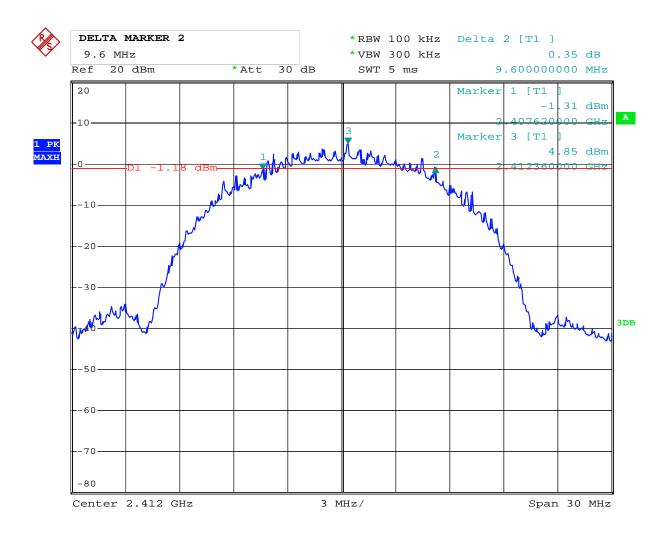

Date: 22.DEC.2012 14:38:33


Page 41 of 98

Report No: E86.12.361.009

Date: 2012-12-24



5. 802.11b at 11Mbps of CH06

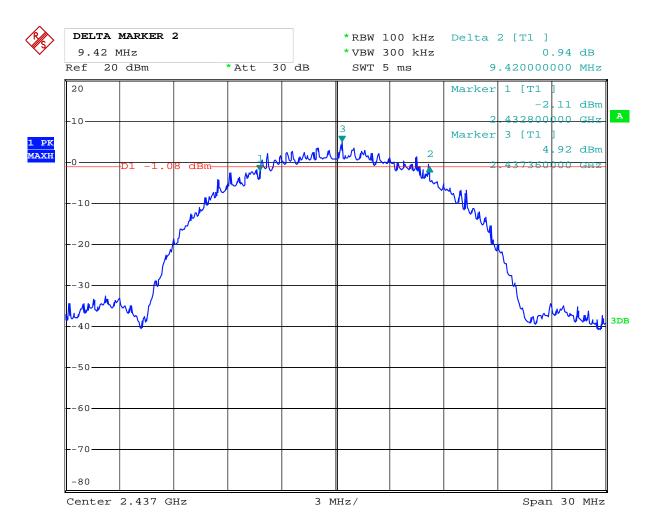

Date: 22.DEC.2012 14:37:30


Page 42 of 98

Report No: E86.12.361.009

Date: 2012-12-24



6. 802.11b at 11Mbps of CH11

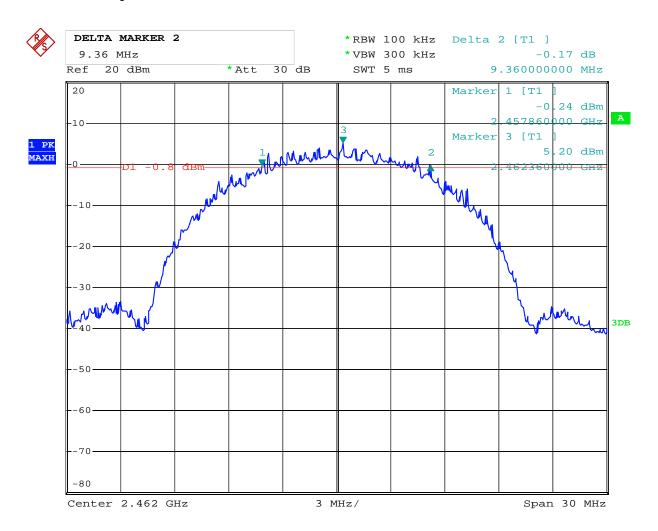

Date: 22.DEC.2012 14:36:16

Report No: E86.12.361.009 Page 43 of 98

Date: 2012-12-24



6dB Occupied Bandwidth

EUT		Cloud Camera	Model		FI-360	FI-360W;FI-360WP;FI-361;FI-361N;FI-362			
Mode		802.11g	Input Voltag	e	AC 120V				
Temperat	ure	24 deg. C,	Humidity			56% RH			
Channel	C	hannel Frequency (MHz)	Data Transfer Rate (Mbps)	Baı	Minimum Limit (MHz)		Pass/ Fail		
1		2412	6	-	16.44	0.5	Pass		
6		2437	6		16.38	0.5	Pass		
11		2462	6	16.44		0.5	Pass		

Page 44 of 98


Report No: E86.12.361.009

Date: 2012-12-24



Test Plots:

1. 802.11g at 6Mbps of CH01

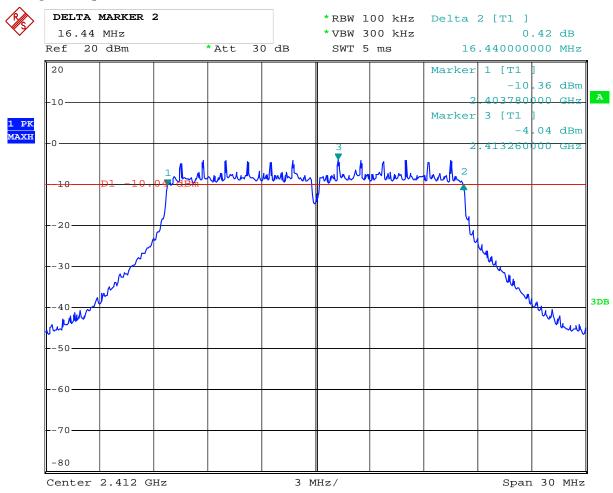

Date: 22.DEC.2012 14:42:34


Page 45 of 98

Report No: E86.12.361.009

Date: 2012-12-24



2. 802.11g at 6Mbps of CH06

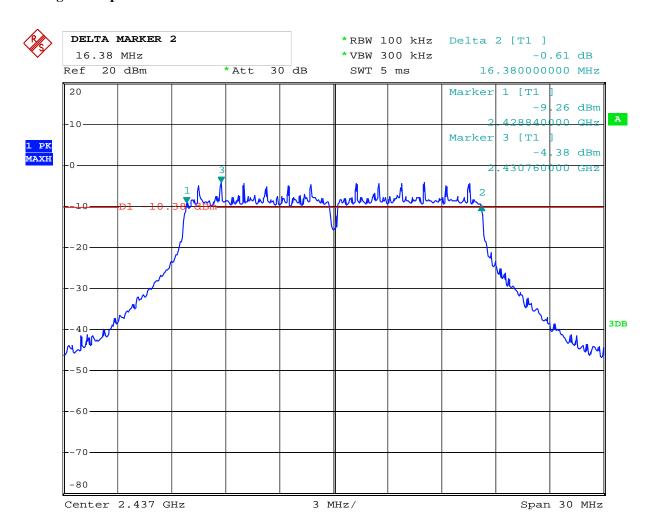

Date: 22.DEC.2012 14:43:39


Page 46 of 98

Report No: E86.12.361.009

Date: 2012-12-24



3. 802.11g at 6Mbps of CH11

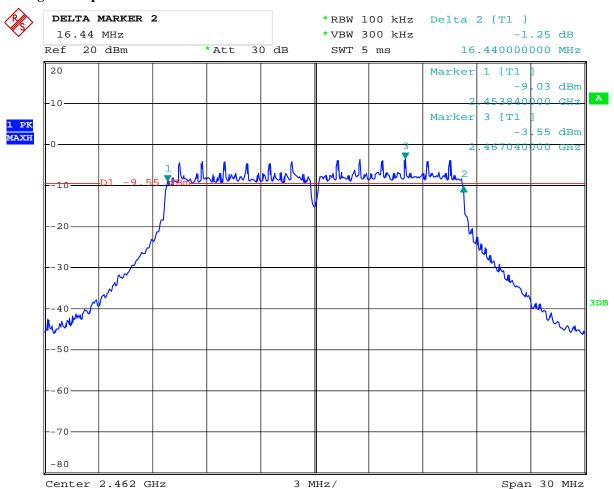

Date: 22.DEC.2012 14:44:57

Report No: E86.12.361.009 Page 47 of 98

Date: 2012-12-24



6dB Occupied Bandwidth

EUT		Cloud Cam	era	Model		F	FI-360W;FI-3	660WP;FI-361;FI-361N;FI-362		
Mode		802.11n	n Input		Input Voltage		AC 120V			
Temperati	ure	24 deg. C	Ξ,	Humidit	y			56% RH		
Channel				Transfer (Mbps)	Bandw		Minimum Limit (MHz)	Pass/ Fail		
1		2412		HT20	17.6		17.64		0.5	Pass
6		2437		HT20		6	0.5	Pass		
11		2462	HT20		17.6	4	0.5	Pass		
1		2422		HT40 35.3		2	0.5	Pass		
4		2437	HT40		35.52		0.5	Pass		
7	2452 HT40		35.5	2	0.5	Pass				

Page 48 of 98


Report No: E86.12.361.009

Date: 2012-12-24



Test Plots:

1. 802.11n at HT20 of CH01

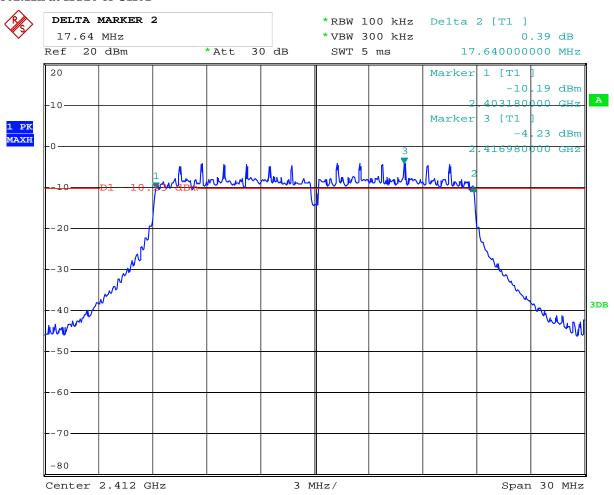

Date: 22.DEC.2012 14:49:09


Page 49 of 98

Report No: E86.12.361.009

Date: 2012-12-24



2. 802.11n at HT20 of CH06

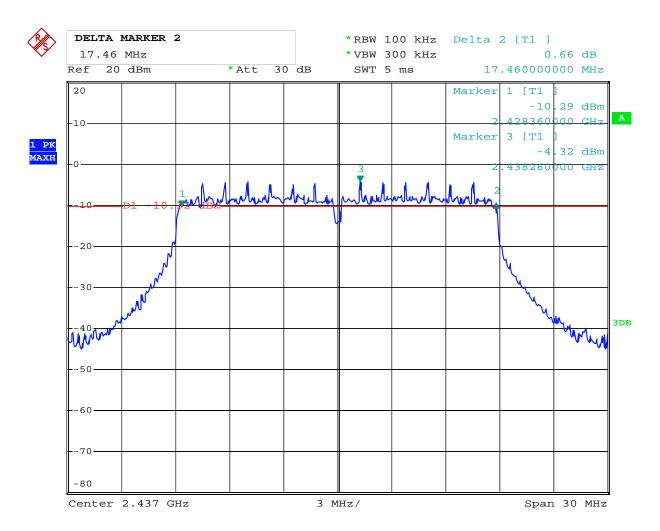

Date: 22.DEC.2012 14:47:17


Page 50 of 98

Report No: E86.12.361.009

Date: 2012-12-24



3. 802.11n at HT20 of CH11

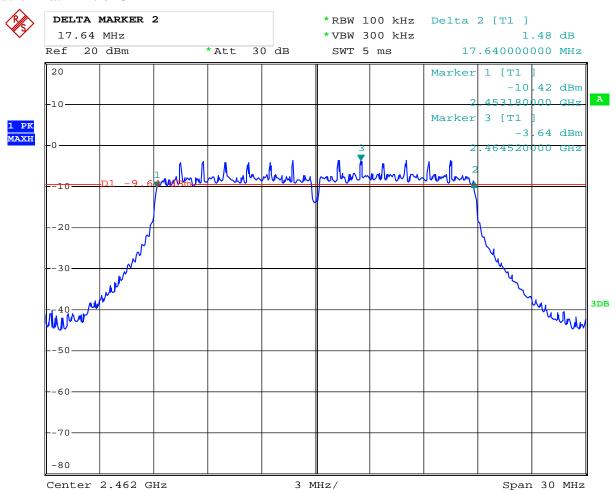

Date: 22.DEC.2012 14:45:58


Page 51 of 98

Report No: E86.12.361.009

Date: 2012-12-24



4. 802.11n at HT40 of CH01

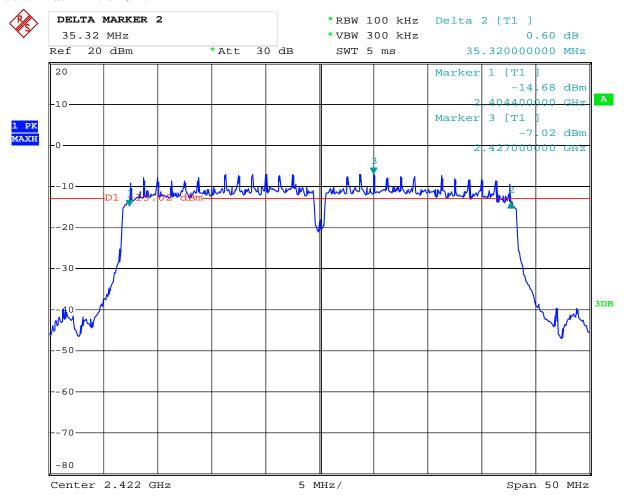

Date: 22.DEC.2012 14:50:43


Page 52 of 98

Report No: E86.12.361.009

Date: 2012-12-24



5. 802.11n at HT40 of CH04

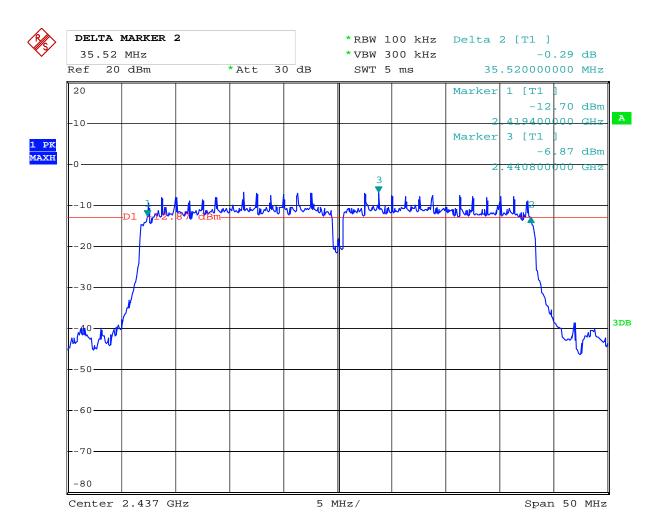

Date: 22.DEC.2012 14:52:11


Page 53 of 98

Report No: E86.12.361.009

Date: 2012-12-24



6. 802.11n at HT40 of CH07

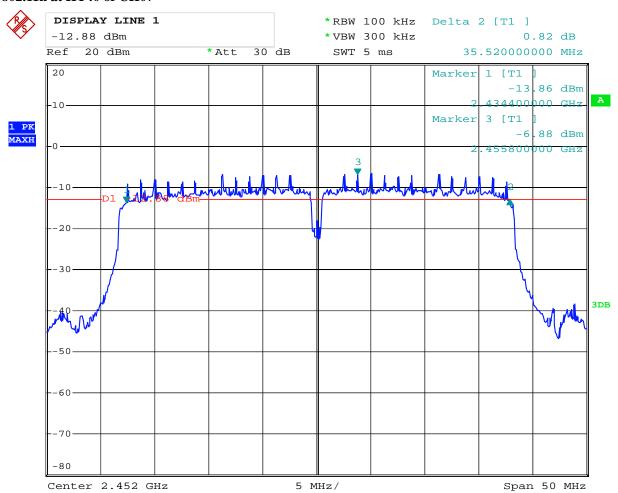

Date: 22.DEC.2012 14:53:35

Report No: E86.12.361.009


Date: 2012-12-24



Page 54 of 98

8. Maximum Peak Output Power

8.1 Test Setup



8.2 Limits of Maximum Peak Output Power

The Maximum Peak Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the peak power was measured

Report No: E86.12.361.009

Date: 2012-12-24



8.4Test Results

EUT		Cloud Camera	Model	Model FI-360W;F		I-360WP;FI-361;FI-361N;FI-362	
Mode		802.11b	Input Voltag	Input Voltage		AC 120V	
Temperat	ure	24 deg. C,	Humidity	Humidity		56% RH	
Channel	Cha	annel Frequency (MHz)	Peak Power Output (dBm)			Pass/ Fail	
1		2412	16.15		30	Pass	
6		2437	16.01	16.01		Pass	
11		2462	16.49	16.49		Pass	

Note: 1. At finial test to get the worst-case emission at 11Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss + Attenuator

3. The test voltage varied from AC102V-138V. The worse case was recorded

EUT	Cloud Camera	Model	FI-360W;FI-360	FI-360W;FI-360WP;FI-361;FI-361N;FI-362		
Mode	802.11g	Input Voltage		AC 120V		
Temperatur	re 24 deg. C,	Humidity		56% RH		
Channel	Channel Frequency (MHz)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass/ Fail		
1	2412	13.31	30	Pass		
6	2437	13.33	30	Pass		
11	2462	13.96	30	Pass		

Note: 1. At finial test to get the worst-case emission at 54Mbps for CH01, CH06 and CH11

- 2. The result basic equation calculation as follow:

 Peak Power Output = Peak Power Reading + Cable loss + Attenuator
- 3. The test voltage varied from AC102V-138V. The worse case was recorded

Report No: E86.12.361.009

Date: 2012-12-24



EUT		Cloud Camera		Model	FI-360W;FI-360WP;FI-361;FI-361N;FI-362		
Mode		802.11n (HT20)		Input Voltage		AC 120V	
Temperatu	re	24 deg. C,		Humidity		56% RH	
Channel	Cł	nannel Frequency (MHz)	P	eak Power Output (dBm)	Peak Power Limit (dBm)	Pass/ Fail	
1		2412		12.81	30	Pass	
6		2437		12.84	30	Pass	
11		2462		13.33	30	Pass	

Note: 1. At finial test to get the worst-case emission at 11n HT20 for CH01, CH06 and CH11

2. The result basic equation calculation as follow:Peak Power Output = Peak Power Reading + Cable loss + Attenuator

3. The test voltage varied from AC102V-138V. The worse case was recorded

EUT		Cloud Camera	Model	FI-3	FI-360W;FI-360WP;FI-361;FI-361N;FI-362	
Mode		802.11n (HT40)	Input Voltage		AC 120V	
Temperatu	re	24 deg. C,	Humidity		56% RH	
Channel	C	hannel Frequency (MHz)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass/ Fail	
1		2422	12.83	30	Pass	
4		2437	13.03	30	Pass	
7		2452	13.23	30	Pass	

Note: 1. At finial test to get the worst-case emission at 11n HT40 for CH01, CH04 and CH07

- 2. The result basic equation calculation as follow:
 - Peak Power Output = Peak Power Reading + Cable loss + Attenuator
- 3. The test voltage varied from AC102V-138V. The worse case was recorded


Report No: E86.12.361.009 Page 57 of 98

Date: 2012-12-24



9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm.

9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW \geq 30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be ≤ 8 dBm.

Page 58 of 98 Report No: E86.12.361.009

Date: 2012-12-24



9.4Test Result

EUT	EUT Cloud Camera		Model		FI-360W;FI-360WP;FI-361;FI-361N;FI-362		
Mode		802.11b 11Mbps	Input Voltage		AC 120V		
Temperat	ure	24 deg. C,	Humidity			56% RH	
Channel	Ch	annel Frequency (MHz)	Final RF Power Level in 3kHz BW (dBm)	I	Iaximum Limit (dBm)		
			11Mt	bps			
1		2412	-5.67		8	Pass	
6		2437	-5.52		8	Pass	
11		2462	-4.83		8	Pass	

EUT		Cloud Camera	Cloud Camera Model		FI-360W;FI-360WP;FI-361;FI-361N;FI-362		
Mode		802.11b 1Mbps	Input Voltage		AC 120V		
Temperati	ure	24 deg. C,	Humidity		56% RH		
Channel	Cha	annel Frequency (MHz)	Final RF Power Level in 3kHz BW (dBm)		faximum Limit (dBm) Pass/ Fail		
			1Mb	ps			
1		2412	-6.46	8		Pass	
6	2437 -6.81			8	Pass		
11		2462 -6.20			8	Pass	

Page 59 of 98 Report No: E86.12.361.009

Date: 2012-12-24



EUT	EUT Cloud Car		Model		FI-360W;FI-360WP;FI-361;FI-361N;FI-362		
Mode		802.11g 6Mbps	Input Voltage		AC 120V		
Temperat	ure	24 deg. C,	Humidity			56% RH	
Channel	Ch	annel Frequency (MHz)	Final RF Power Level in 3kHz BW (dBm)		Maximum Limit (dBm)		
			6Mb	ps			
1		2412	-14.66		8	Pass	
6		2437	-14.53		8	Pass	
11		2462	-14.28		8	Pass	

EUT	EUT Cloud		Model		FI-360W;FI-360WP;FI-361;FI-361N;FI-362		
Mode		802.11n HT20	Input Voltage	e	AC 120V		
Temperat	ure	24 deg. C,	Humidity			56% RH	
Channel	Cha	annel Frequency (MHz)	Final RF Power Level in 3kHz BW (dBm)		Maximum Limit (dBm) Pass/ Fail		
			HT2	20			
1		2412	-14.22		8	Pass	
6		2437	-14.13		8	Pass	
11	·	2462	-12.49		8	Pass	

Page 60 of 98 Report No: E86.12.361.009

Date: 2012-12-24



EUT	EUT Cloud Came		Model		FI-360W;FI-360WP;FI-361;FI-361N;FI-362		
Mode		802.11n HT40	Input Voltage		AC 120V		
Temperat	ure	24 deg. C,	Humidity			56% RH	
Channel	Cha	annel Frequency (MHz)	Final RF Power Level in 3kHz BW (dBm)		faximum Limit (dBm) Pass/ Fail		
			HT2	10			
1		2422	-16.85		8	Pass	
6		2437	-16.73		8	Pass	
11		2452	-16.65		8	Pass	

Page 61 of 98


Report No: E86.12.361.009

Date: 2012-12-24



9.5 Photo of Power Spectral Density Measurement

1.802.11b at 11Mbps of CH01

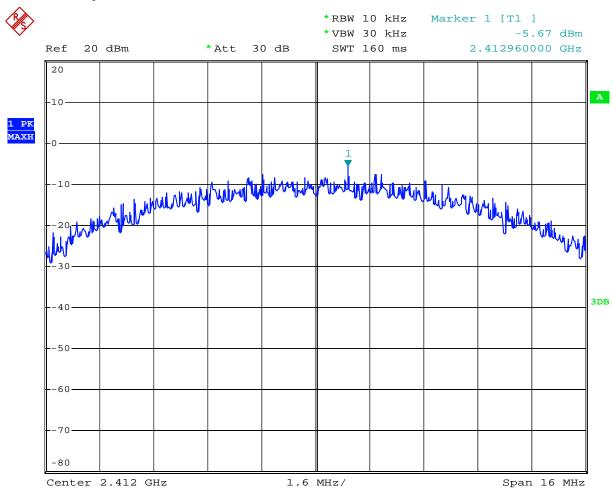

Date: 22.DEC.2012 15:07:55


Page 62 of 98

Report No: E86.12.361.009

Date: 2012-12-24



2. 802.11b at 11Mbps at CH06

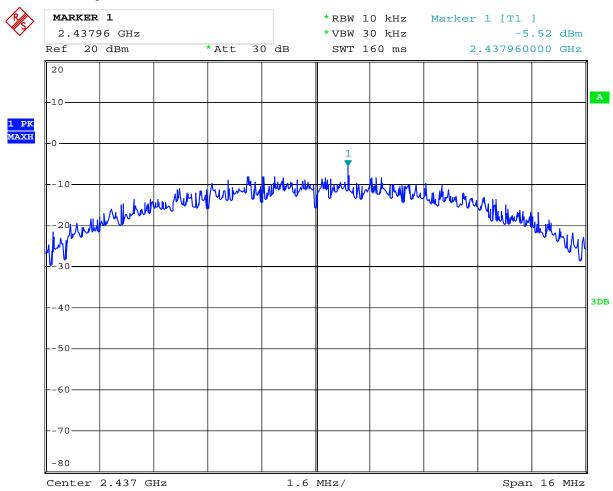

Date: 22.DEC.2012 15:06:53


Page 63 of 98

Report No: E86.12.361.009

Date: 2012-12-24



3. 802.11b at 11Mbps of CH11

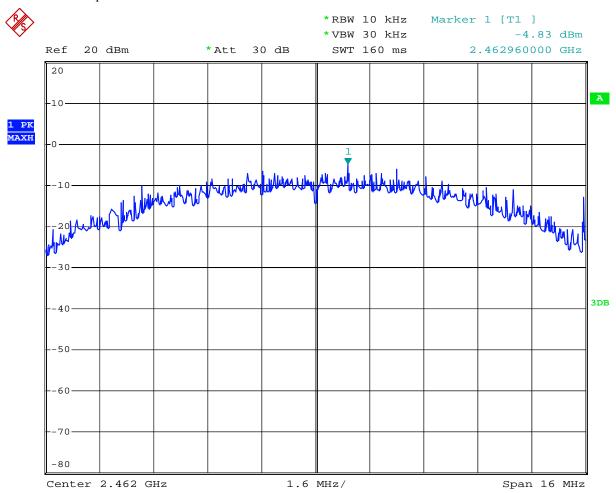

Date: 22.DEC.2012 14:59:13


Page 64 of 98

Report No: E86.12.361.009

Date: 2012-12-24



4. 802.11b at 1Mbps of CH1

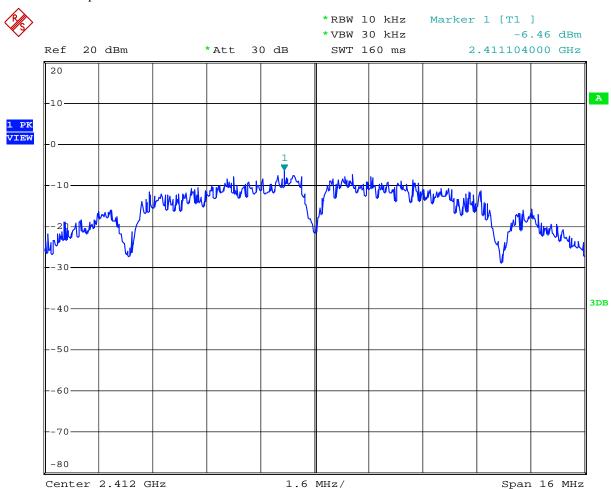

Date: 22.DEC.2012 14:56:09


Page 65 of 98

Report No: E86.12.361.009

Date: 2012-12-24



5. 802.11b at 1Mbps of CH6

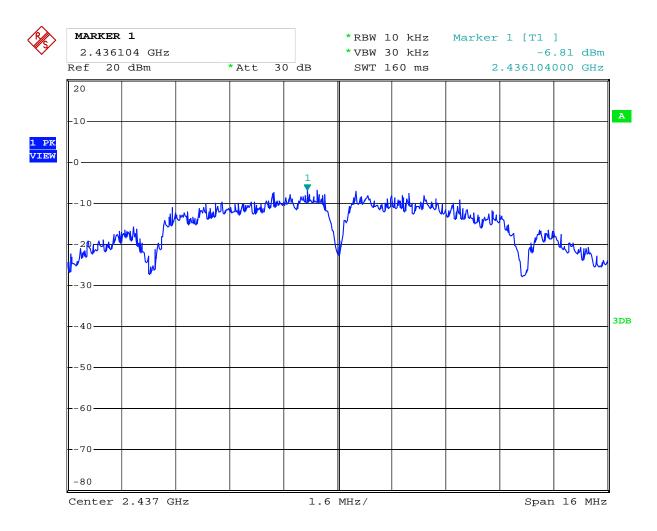

Date: 22.DEC.2012 14:57:15


Page 66 of 98

Report No: E86.12.361.009

Date: 2012-12-24



6. 802.11b at 1Mbps of CH11

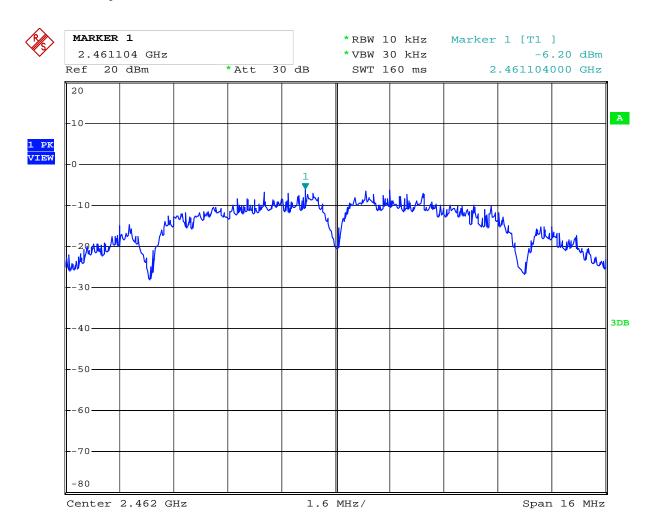

Date: 22.DEC.2012 14:57:54


Page 67 of 98

Report No: E86.12.361.009

Date: 2012-12-24



7. 802.11g at 6Mbps of CH1

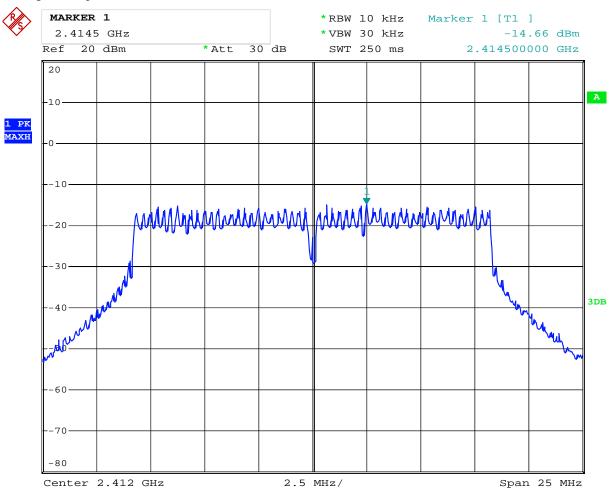

Date: 22.DEC.2012 15:08:44


Page 68 of 98

Report No: E86.12.361.009

Date: 2012-12-24



8. 802.11g at 6 Mbps of CH6

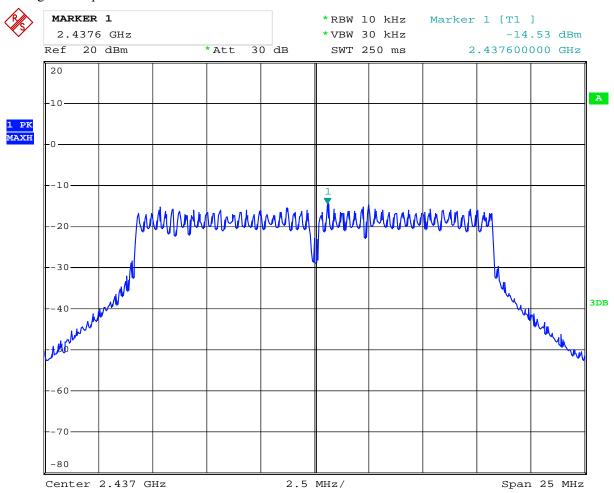

Date: 22.DEC.2012 15:09:10


Page 69 of 98

Report No: E86.12.361.009

Date: 2012-12-24



9. 802.11g at 6 Mbps of CH11

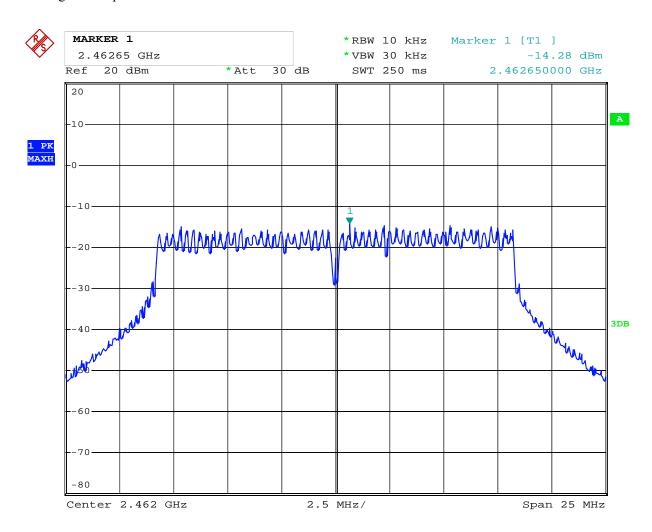

Date: 22.DEC.2012 15:09:42


Page 70 of 98

Report No: E86.12.361.009

Date: 2012-12-24



10. 802.11n at HT20 of CH01

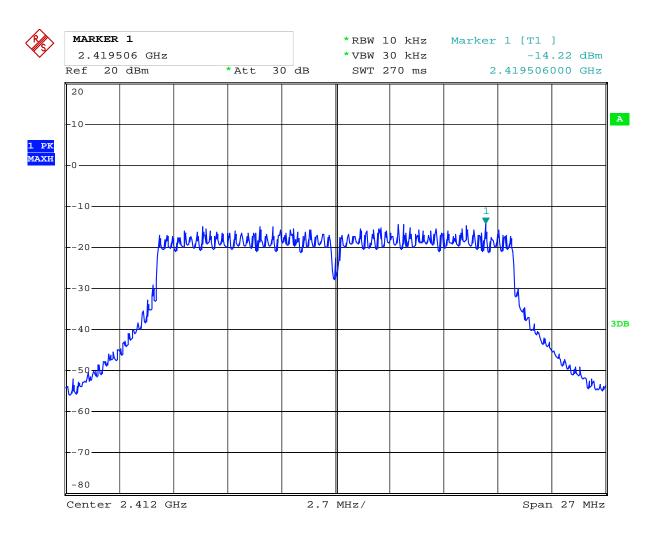

Date: 22.DEC.2012 15:10:57


Page 71 of 98

Report No: E86.12.361.009

Date: 2012-12-24



11. 802.11n at HT20 of CH06

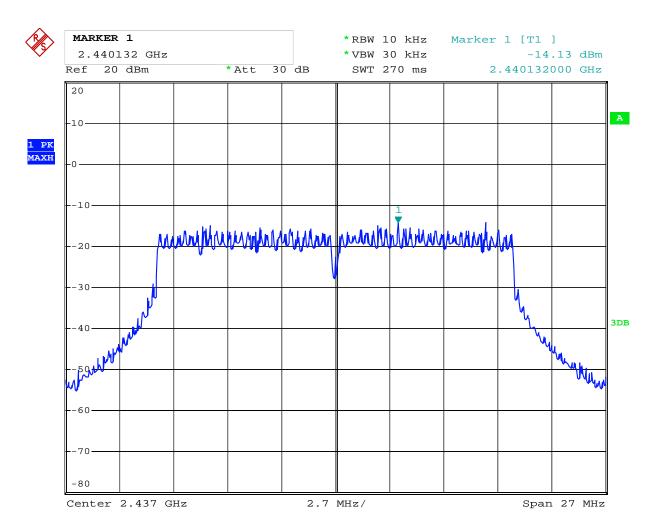

Date: 22.DEC.2012 15:11:32


Page 72 of 98

Report No: E86.12.361.009

Date: 2012-12-24



12. 802.11n at HT20 of CH11

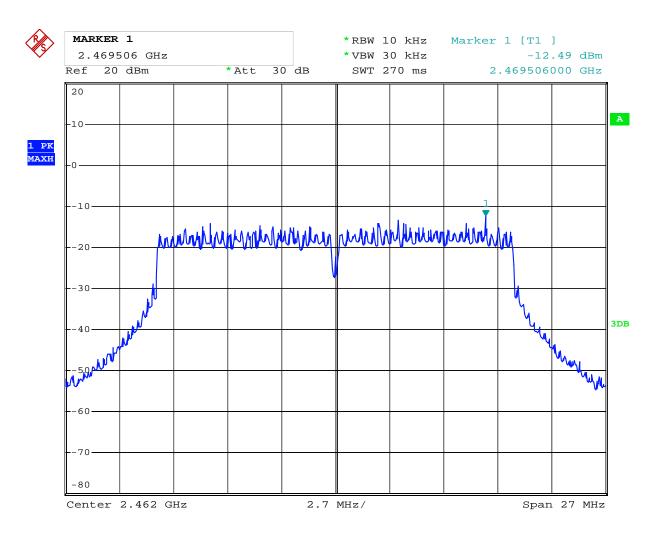

Date: 22.DEC.2012 15:12:12


Page 73 of 98

Report No: E86.12.361.009

Date: 2012-12-24



13. 802.11n at HT40 of CH01

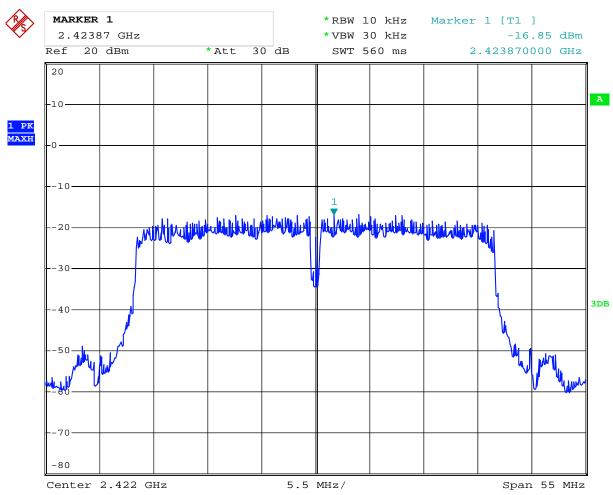

Date: 22.DEC.2012 15:14:54


Page 74 of 98

Report No: E86.12.361.009

Date: 2012-12-24



14. 802.11n at HT40 of CH04

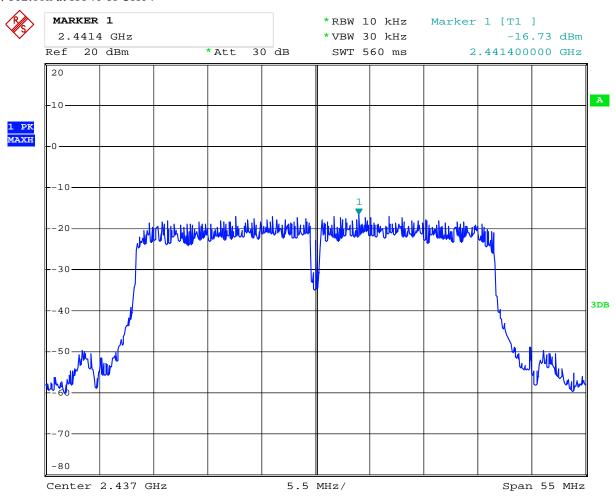

Date: 22.DEC.2012 15:14:04


Page 75 of 98

Report No: E86.12.361.009

Date: 2012-12-24



15. 802.11n at HT40 of CH07

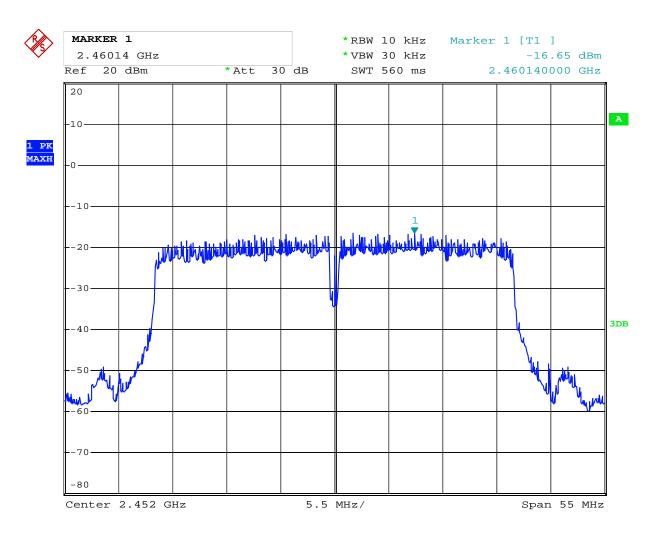

Date: 22.DEC.2012 15:13:18


Report No: E86.12.361.009 Page 76 of 98

Date: 2012-12-24



10 Out of Band Measurement

10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test.(Peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector)

For bandage test, the spectrum set as follows: RBW=VBW=100 kHz. A conducted measurement used

10.4 Test Result

Please see next pages

Note: 1. this is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), after pre-test. It was found that the worse radiated emission was get at the lying position. the worse case was recorded

2. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Date: 2012-12-24




For 802.11b mode

CH01 at 11Mbps

10.4 Band-edge and Restricted band Measurement

Product:	Cloud Can	nera	Model:	FI-360W;FI-360WP;FI-361;FI-361N;FI-362
Mode	Keeping Transmitting		Input Voltage	AC 120V
Temperature	24 deg. 0	C,	Humidity	56% RH
Test Result:	Pass		Detector	PK
2400	PK (dBµV/m)	46.52	Limit	$74(dB\mu V/m)$
	$AV (dB\mu V/m)$	1	Limit	54(dBμV/m)
2390	PK (dBµV/m)	40.63	Limit	74(dBμV/m)
	AV ($dB\mu V/m$)		LIIIII	54(dBμV/m)

Test Figure:

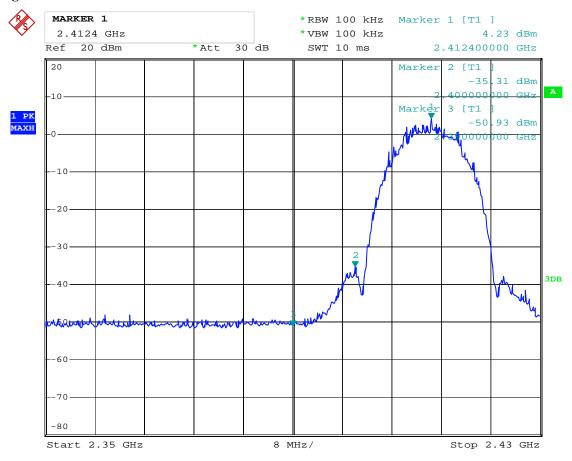

Date: 22.DEC.2012 15:23:29

Note: The Max. FS in Restrict Band are measured in conventional method.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2012-12-24




CH11 at 11Mbps

10.4 Band-edge and Restricted band Measurement

Product:	Cloud Ca	mera	Model:		FI-360W;FI-360WP;FI-361;FI-361N;FI-362
Mode	Keeping Tran	g Transmitting		ut Voltage	AC 120V
Temperature	24 deg.	C,	Humidity		56% RH
Test Result:	Pass		Detector		PK
2483.5	PK (dBµV/m)	40.33		T ::4	74(dBμV/m)
	AV (dBμV/m)			Limit	54(dBµV/m)

Test Figure:

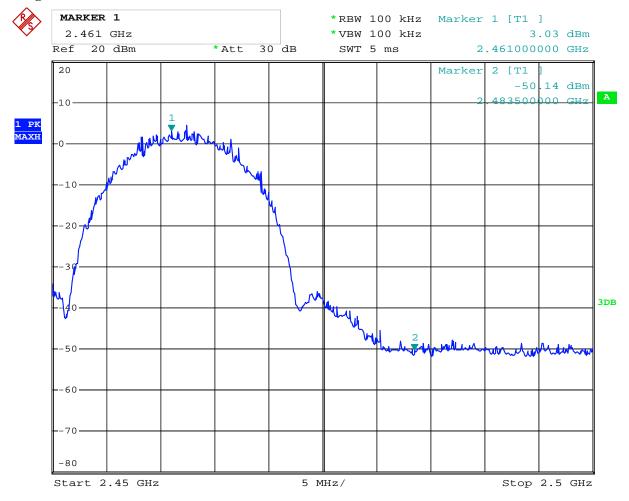

Date: 22.DEC.2012 15:19:01

Note: The Max. FS in Restrict Band are measured in conventional method.

Date: 2012-12-24




For 802.11b mode

CH01 at 1Mbps

10.4 Band-edge and Restricted band Measurement

Product:	Cloud Can	nera	Model:	FI-360W;FI-360WP;FI-361;FI-361N;
Troduct.			Wiodei.	FI-362
Mode	Keeping Transmitting		Input Voltage	AC 120V
Temperature	24 deg. (C,	Humidity	56% RH
Test Result:	Pass		Detector	PK
2400	PK (dBμV/m)	47.01	T ::4	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$
2390	PK (dBµV/m)	40.17	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)		Lillit	$54(dB\mu V/m)$

Test Figure:

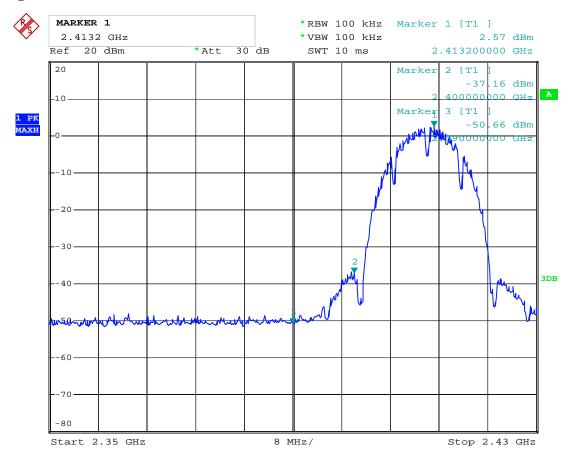

Date: 22.DEC.2012 15:22:48

Note: The Max. FS in Restrict Band are measured in conventional method.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2012-12-24




CH11 at 1Mbps

10.4 Band-edge and Restricted band Measurement

Product:	Cloud Can	era Model				FI-360W;FI-360WP;FI-361;FI-361N;FI-362
Mode	Keeping Trans	mitting	Input Voltag	ge		AC 120V
Temperature	24 deg. (C, Humidity		7		56% RH
Test Result:	Pass	Detector				PK
2483.5	PK (dBμV/m)	40.71		т :		74(dBμV/m)
	AV (dBμV/m)			Lii	nit	$54(dB\mu V/m)$

Test Figure:

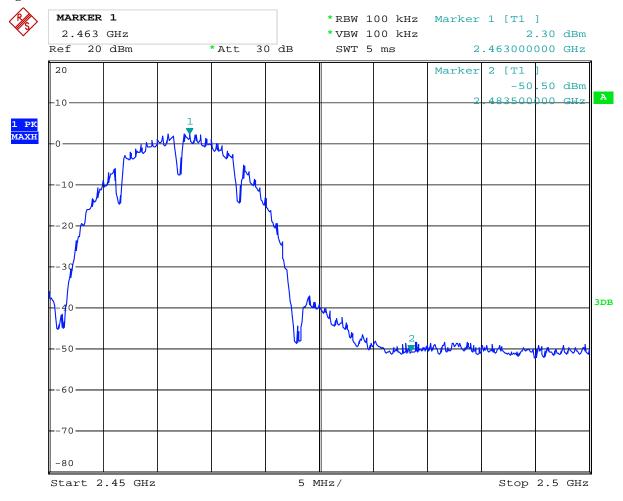

Date: 22.DEC.2012 15:18:14

Note: The Max. FS in Restrict Band are measured in conventional method.

Date: 2012-12-24




For 802.11g mode

CH01 at 6Mbps

10.4 Band-edge and Restricted band Measurement

Product:	Cloud Camera		Model:	FI-360W;FI-360WP;FI-361;FI-361N;FI-362
Mode	Keeping Trans	Keeping Transmitting		AC 120V
Temperature	24 deg. (Ξ,	Humidity	56% RH
Test Result:	Pass		Detector	PK
2400	PK (dBµV/m)	46.93	Limit	$74(dB\mu V/m)$
	$AV (dB\mu V/m)$		Limit	$54(dB\mu V/m)$
2390	PK (dBµV/m)	41.02	Limit	$74(dB\mu V/m)$
	$AV (dB\mu V/m)$		Lillit	$54(dB\mu V/m)$

Test Figure:

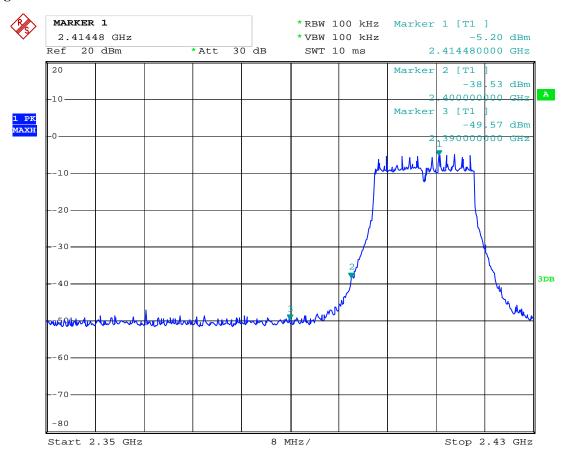

Date: 22.DEC.2012 15:21:53

Note: The Max. FS in Restrict Band are measured in conventional method.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2012-12-24




CH11 at 6Mbps

10.4 Band-edge and Restricted band Measurement

Product:	Cloud Can	nera	Mod	el:	FI-360W;FI-360WP;FI-361;FI-361N;FI-362
Mode	Keeping Transmitting		Input Voltage		AC 120V
Temperature	24 deg. (Ξ,	Humidity		56% RH
Test Result:	Pass		Detector		PK
2483.5	PK (dBµV/m)	41.37	T ::4		$74(dB\mu V/m)$
	$AV (dB\mu V/m)$		Limit	Limit 54(dBμV/m)	

Test Figure:

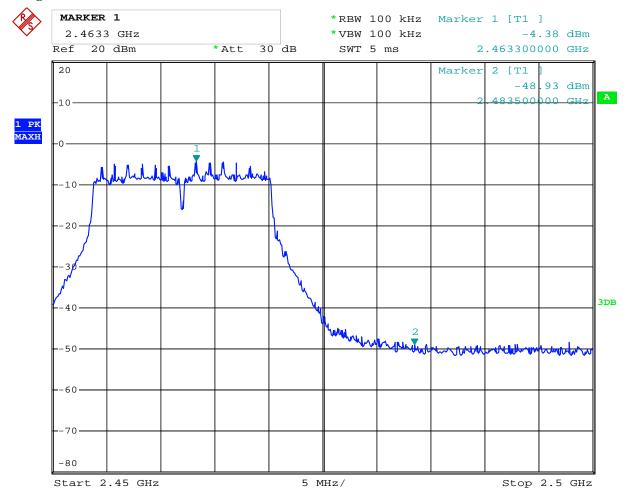

Date: 22.DEC.2012 15:20:57

Note: The Max. FS in Restrict Band are measured in conventional method.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2012-12-24




For 802.11n (HT20) mode

CH01 at 65Mbps

10.4 Band-edge and Restricted band Measurement

Product:	Cloud Cam	iera M		odel:	FI-360W;FI-360WP;FI-361;FI-361N;FI-362
Mode	Keeping Transi	mitting	Input Voltage		AC 120V
Temperature	24 deg. C	C, Hu		midity	56% RH
Test Result:	Pass	De		tector	PK
2400	PK (dBµV/m)	46.87		T 1 14	$74(dB\mu V/m)$
	AV (dBμV/m)			Limit	$54(dB\mu V/m)$
2390	PK (dBµV/m)	40.73		Limit	$74(dB\mu V/m)$
	AV (dBμV/m)			Lillill	$54(dB\mu V/m)$

Test Figure:

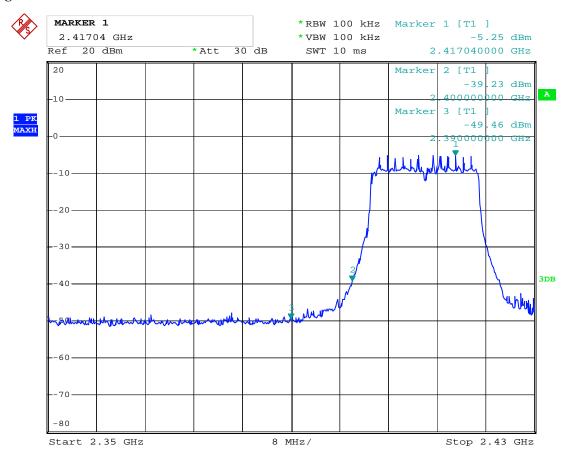

Date: 22.DEC.2012 15:24:30

Note: The Max. FS in Restrict Band are measured in conventional method.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2012-12-24




CH11 at 65Mbps

10.4 Band-edge and Restricted band Measurement

Product:	Cloud Ca	mera	Model:	FI-360W;FI-360WP;FI-361;FI-361N;FI-362
Mode	Keeping Tran	nsmitting	Input Voltage	AC 120V
Temperature	24 deg.	24 deg. C,		56% RH
Test Result:	Pass		Detector	PK
2483.5	PK (dBµV/m)	41.65	T ::4	74(dBμV/m)
	AV ($dB\mu V/m$)		Limit	54(dBµV/m)

Test Figure:

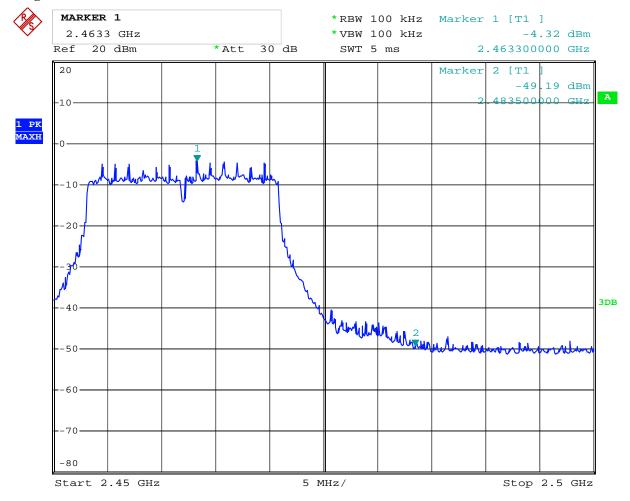

Date: 22.DEC.2012 15:19:55

Note: The Max. FS in Restrict Band are measured in conventional method.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2012-12-24




For 802.11n (HT40) mode

CH01 at 65Mbps

10.4 Band-edge and Restricted band Measurement

	1						
Product:	Cloud Cam	iera	Model:		FI-360W;FI-360WP;FI-361;FI-361N;FI-362		
Mode	Keeping Trans	mitting Inp		put	AC 120V		
		Vol		tage			
Temperature	24 deg. (C, Hum		nidity	56% RH		
Test Result:	Pass	Dete		ector	PK		
2400	PK (dBµV/m)	41.1	17	T 114	74(dBμV/m)		
	AV ($dB\mu V/m$)			Limit	$54(dB\mu V/m)$		
2390	PK (dBµV/m)	40.53		Limit	74(dBμV/m)		
	AV (dBμV/m)			LIIIII	54(dBμV/m)		

Test Figure:

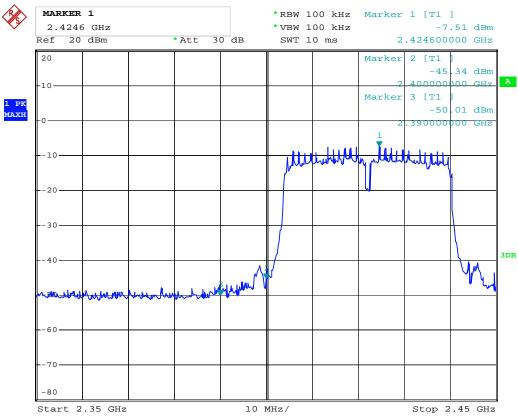

Date: 22.DEC.2012 15:15:48

Note: The Max. FS in Restrict Band are measured in conventional method.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2012-12-24




CH7 at 65Mbps

10.4 Band-edge and Restricted band Measurement

Product:	Cloud Ca	mera	Model:	FI-360W;FI-360WP;FI-361;FI-361N;FI-362
Mode	Keeping Tran	smitting	Input Voltage	AC 120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5	PK (dBµV/m)	41.92	T ::4	74(dBμV/m)
	AV (dBμV/m)		Limit	54(dBμV/m)

Test Figure:

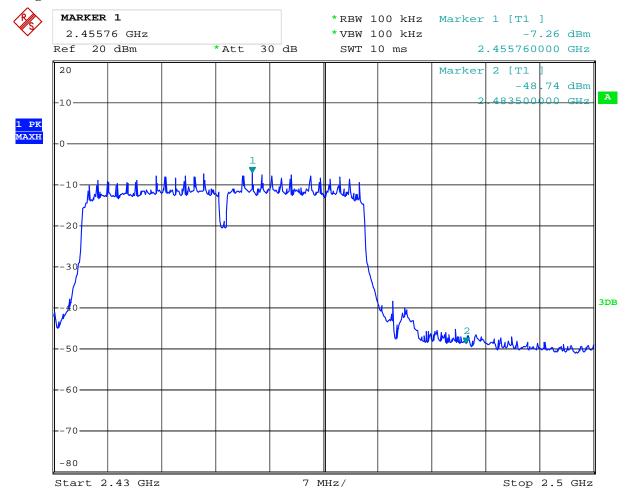

Date: 22.DEC.2012 15:16:49

Note: The Max. FS in Restrict Band are measured in conventional method.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2012-12-24



Page 87 of 98

11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

Dipole antennas used. The maximum Gain of the antennas is 3.0dBi.

Report No: E86.12.361.009 Page 88 of 98

Date: 2012-12-24




12.0 FCC ID Label

FCC ID: RU6-36IPC

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

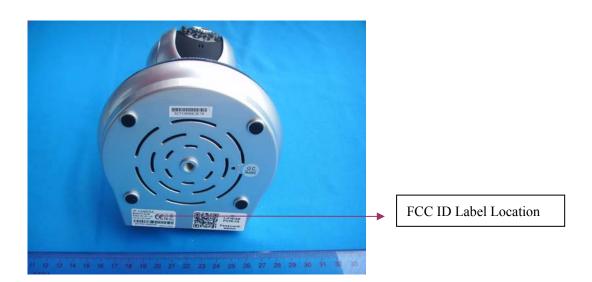

Page 89 of 98


Report No: E86.12.361.009

Date: 2012-12-24



13.0 **Photo of testing**

Conducted Emission Test Setup:

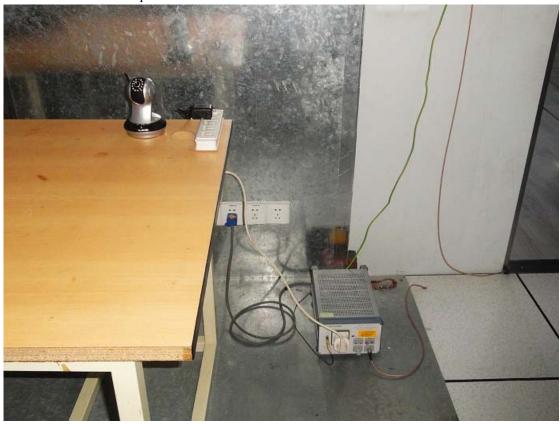


Date: 2012-12-24



Radiated Emission Test Setup:



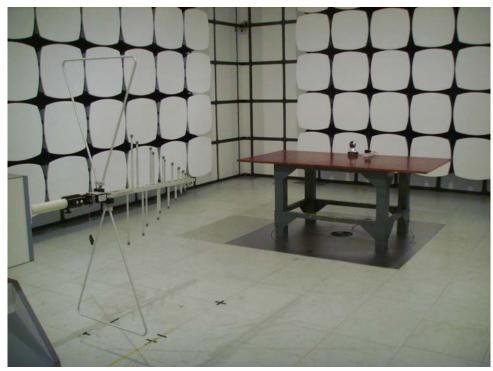

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Greatwall International Approval Co., Limited reserves the rights to withdraw it and to adopt any

other remedies which may be appropriate.

Date: 2012-12-24



Photographs - EUT

Details of: Overview



Details of: Side view



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Page 92 of 98

Report No: E86.12.361.009


Date: 2012-12-24



Details of: Real view

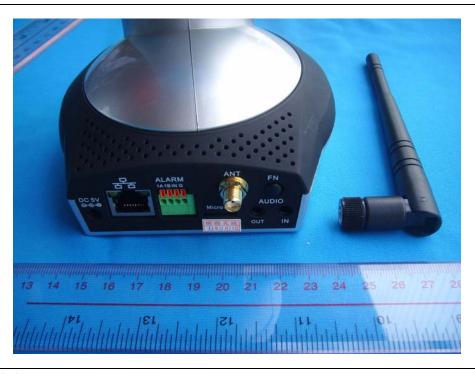

Details of: Internal view 1

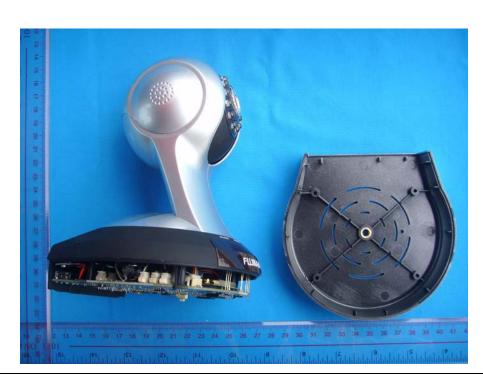


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Date: 2012-12-24



Details of: Internal view 2

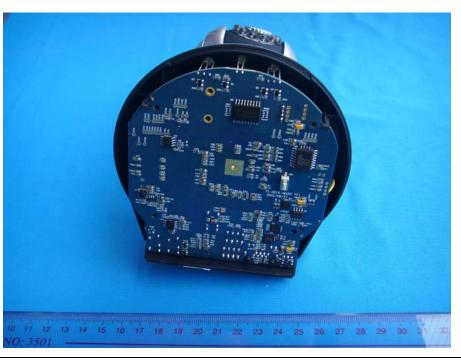

Details of: Main PCB

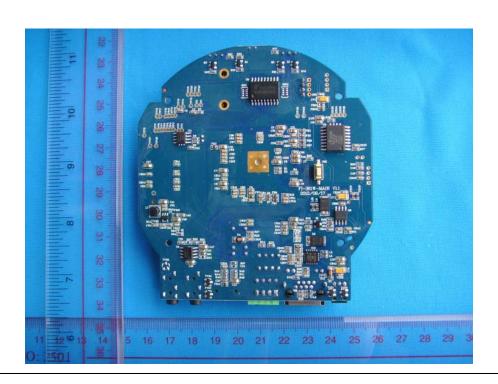

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 94 of 98

Report No: E86.12.361.009


Date: 2012-12-24



Details of: Main PCB



Details of: Internal view 3

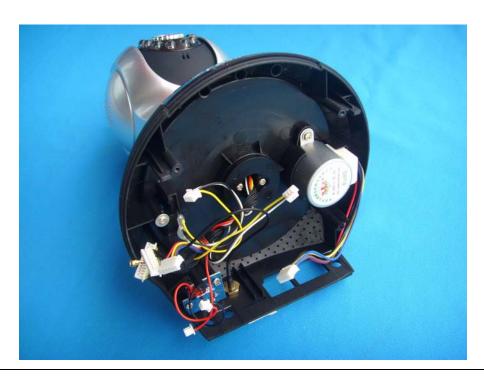


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Date: 2012-12-24



Details of: Switch board

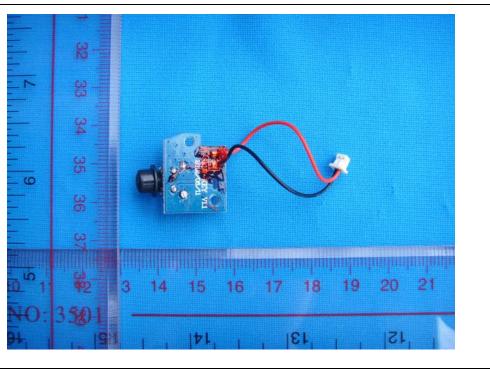

Details of: Switch board

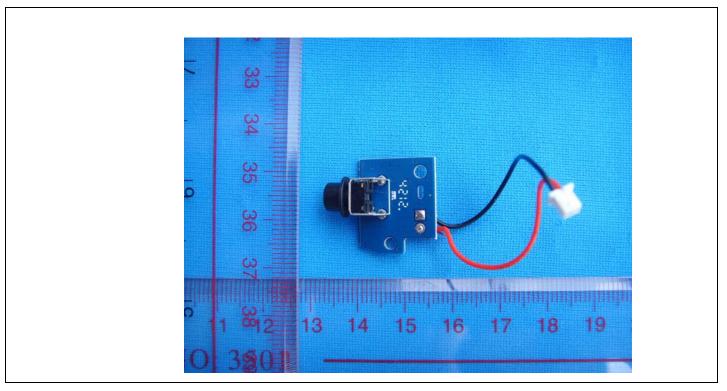

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2012-12-24



Details of: Internal view 4



Details of: Internal view 5



The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Greatwall International Approval Co., Limited reserves the rights to withdraw it and to adopt any


Date: 2012-12-24



Details of: CMOS PCB

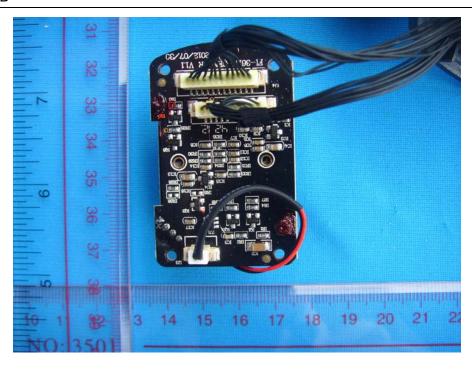

Details of: CMOS PCB

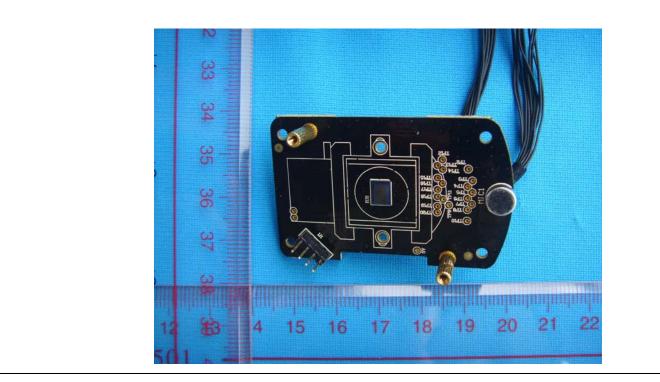

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 98 of 98

Report No: E86.12.361.009


Date: 2012-12-24



Details of: Infrared LED PCB and Lens



Details of: Infrared LED PCB and Lens

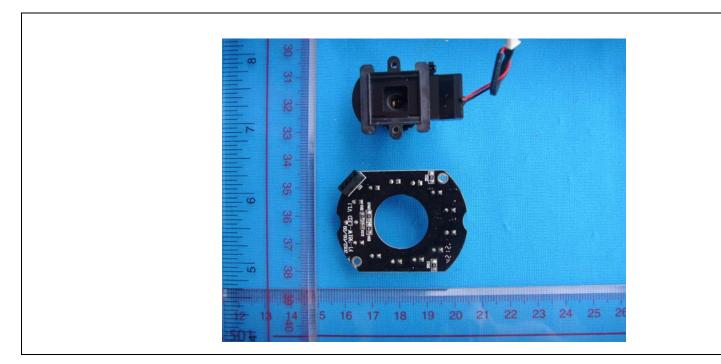

End of the report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Greatwall International Approval Co., Limited. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Greatwall International Approval Co., Limited to his customer. Supplier or others persons directly concerned. Greatwall International Approval Co., Limited will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.