

Report on the Radio Testing

For

HWM-Water Ltd

on

Pcorr+

Report no. TRA-035318-00-47-00A

5th October 2017

RF922 3.0

Report Number: TRA-035318-00-47-00A  
Issue: A

REPORT ON THE RADIO TESTING OF A  
HWM-Water Ltd  
Pcorr+  
WITH RESPECT TO SPECIFICATION  
FCC 47CFR 15.249

TEST DATE: 27 - 28 September 2017

Written by: D Winstanley

Daniel Winstanley  
Senior Radio Test Engineer

Approved by:

John Charters  
Department Manager - Radio

Date: 5th October 2017

Disclaimers:

- [1] THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE  
[2] THE RESULTS CONTAINED IN THIS DOCUMENT RELATE ONLY TO THE ITEM(S) TESTED

RF922 3.0

1 Revision Record

<i>Issue Number</i>	<i>Issue Date</i>	<i>Revision History</i>
A	5th October 2017	Original

## 2 Summary

TEST REPORT NUMBER:	TRA-035318-00-47-00A
WORKS ORDER NUMBER	TRA-035318-00
PURPOSE OF TEST:	USA: Testing of radio frequency equipment per the relevant authorization procedure of chapter 47 of CFR (code of federal regulations) Part 2, subpart J.
TEST SPECIFICATION(S):	47CFR15.249
EQUIPMENT UNDER TEST (EUT):	Pcorr+
FCC IDENTIFIER:	RUZ-031A
EUT SERIAL NUMBER:	07162006
MANUFACTURER/AGENT:	HWM-Water Ltd
ADDRESS:	Ty Coch House Llantarnam Industrial Park Cwmbran NP44 3AW United Kingdom
CLIENT CONTACT:	Andy Earp ☎ 01633 627853 ✉ aearp@hwm-water.com
TEST DATE:	27 - 28 September 2017
TESTED BY:	Daniel Winstanley Element

## 2.1 Test Summary

Test Method and Description	Requirement Clause	Applicable to this equipment	Result / Note
	47CFR15		
Radiated spurious emissions	15.249(d)	<input checked="" type="checkbox"/>	Pass
AC power line conducted emissions	15.207	<input type="checkbox"/>	Battery powered Only
Occupied bandwidth	15.215(c)	<input checked="" type="checkbox"/>	Pass
Field strength of fundamental	15.249(a)	<input checked="" type="checkbox"/>	Pass
Calculation of duty correction <sup>1</sup>	15.35(c)	<input type="checkbox"/>	N/A
Unintentional Radiated Spurious Emissions	15.109	<input checked="" type="checkbox"/>	Pass

### Notes:

The results contained in this report relate only to the items tested, in the condition at time of test, and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only. Any modifications made are identified in Section 8 of this report.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 5.2 of this test report (Deviations from Test Standards).

### 3 Contents

1	Revision Record.....	3
2	Summary.....	4
2.1	Test Summary.....	5
3	Contents.....	6
4	Introduction .....	7
5	Test Specifications .....	8
5.1	Normative References .....	8
5.2	Deviations from Test Standards .....	8
6	Glossary of Terms.....	9
7	Equipment Under Test .....	10
7.1	EUT Identification.....	10
7.2	System Equipment.....	10
7.3	EUT Mode of Operation .....	10
7.3.1	Transmission.....	10
7.3.2	Reception .....	10
7.4	EUT Radio Parameters .....	11
7.4.1	General .....	11
7.4.2	Antennas.....	11
7.5	EUT Description .....	11
8	Modifications .....	12
9	EUT Test Setup.....	13
9.1	Block Diagram.....	13
9.2	General Set-up Photograph .....	14
10	General Technical Parameters.....	15
10.1	Normal Conditions.....	15
10.2	Varying Test Conditions .....	15
11	Radiated emissions.....	16
11.1	Definitions .....	16
11.2	Test Parameters.....	16
11.3	Test Limit .....	17
11.4	Test Method .....	18
11.5	Test Set-up Photograph .....	19
11.6	Test Equipment.....	19
11.7	Test Results .....	20
12	Occupied Bandwidth .....	21
12.1	Definitions .....	21
12.2	Test Parameters.....	21
12.3	Test Limit .....	21
12.4	Test Method .....	22
12.5	Test Equipment.....	22
12.6	Test Results .....	23
13	Transmitter output power (fundamental radiated emission) .....	24
13.1	Definition .....	24
13.2	Test Parameters.....	24
13.3	Test Limit .....	24
13.4	Test Method .....	25
13.5	Test Equipment.....	25
13.6	Test Results .....	25
14	Radiated emissions – unintentional radiation / receiver emissions .....	26
14.1	Definitions .....	26
14.2	Test Parameters.....	26
14.3	Test Limit .....	26
14.4	Test Method .....	27
14.5	Test Equipment.....	28
14.6	Test Results .....	28
15	Measurement Uncertainty .....	29

## 4 Introduction

This report TRA-035318-00-47-00A presents the results of the Radio testing on a HWM-Water Ltd, Pcorr+ to specification 47CFR15 Radio Frequency Devices.

The testing was carried out for HWM-Water Ltd by Element, at the address(es) detailed below.

<input type="checkbox"/>	Element Hull Unit E South Orbital Trading Park Hedon Road Hull HU9 1NJ UK	<input checked="" type="checkbox"/>	Element North West Unit 1 Pendle Place Skemersdale West Lancashire WN8 9PN UK
--------------------------	---	-------------------------------------	---

This report details the configuration of the equipment, the test methods used and any relevant modifications where appropriate.

All test and measurement equipment under the control of the laboratory and requiring calibration is subject to an established programme and procedures to control and maintain measurement standards. The quality management system meets the principles of ISO 9001, and has quality control procedures for monitoring the validity of tests undertaken. Records and sufficient detail are retained to establish an audit trail of calibration records relating to its test results for a defined period. Under control of the established calibration programme, key quantities or values of the test & measurement instrumentation are within specification and comply with the relevant traceable internationally recognised and appropriate standard specifications, which are UKAS calibrated as such where these properties have a significant effect on results. Participation in inter-laboratory comparisons and proficiency testing ensures satisfactory correlation of results conform to Elements own procedures, as well as statistical techniques for analysis of test data providing the appropriate confidence in measurements.

Throughout this report EUT denotes equipment under test.

FCC Site Listing:

Element is accredited for the above sites under the US-EU MRA, Designation number UK0009.

IC Registration Number(s):

Element North West                      3930B

The test site requirements of ANSI C63.4-2014 are met up to 1 GHz.

The test site SVSWR requirements of CISPR 16-1-4:2010 are met over the frequency range 1 GHz to 18 GHz.

## **5 Test Specifications**

### **5.1 Normative References**

- FCC 47 CFR Ch. I – Part 15 – Radio Frequency Devices.
- ANSI C63.10-2013 – American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.
- ANSI C63.4-2014 – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

### **5.2 Deviations from Test Standards**

There were no deviations from the test standard.



## 6 Glossary of Terms

<b>§</b>	denotes a section reference from the standard, not this document
<b>AC</b>	Alternating Current
<b>ANSI</b>	American National Standards Institute
<b>BW</b>	bandwidth
<b>C</b>	Celsius
<b>CFR</b>	Code of Federal Regulations
<b>CW</b>	Continuous Wave
<b>dB</b>	decibel
<b>dBm</b>	dB relative to 1 milliwatt
<b>DC</b>	Direct Current
<b>DSSS</b>	Direct Sequence Spread Spectrum
<b>EIRP</b>	Equivalent Isotropically Radiated Power
<b>ERP</b>	Effective Radiated Power
<b>EUT</b>	Equipment Under Test
<b>FCC</b>	Federal Communications Commission
<b>FHSS</b>	Frequency Hopping Spread Spectrum
<b>Hz</b>	hertz
<b>IC</b>	Industry Canada
<b>ITU</b>	International Telecommunication Union
<b>LBT</b>	Listen Before Talk
<b>m</b>	metre
<b>max</b>	maximum
<b>MIMO</b>	Multiple Input and Multiple Output
<b>min</b>	minimum
<b>MRA</b>	Mutual Recognition Agreement
<b>N/A</b>	Not Applicable
<b>PCB</b>	Printed Circuit Board
<b>PDF</b>	Portable Document Format
<b>Pt-mpt</b>	Point-to-multipoint
<b>Pt-pt</b>	Point-to-point
<b>RF</b>	Radio Frequency
<b>RH</b>	Relative Humidity
<b>RMS</b>	Root Mean Square
<b>Rx</b>	receiver
<b>s</b>	second
<b>SVSWR</b>	Site Voltage Standing Wave Ratio
<b>Tx</b>	transmitter
<b>UKAS</b>	United Kingdom Accreditation Service
<b>V</b>	volt
<b>W</b>	watt
<b>Ω</b>	ohm

## **7 Equipment Under Test**

### **7.1 EUT Identification**

- Name: Pcorr+
- Serial Number: 07162006
- Model Number PR5US
- Software Revision: V1.36
- Build Level / Revision Number: Production Standard

### **7.2 System Equipment**

Equipment listed below forms part of the overall test setup and is required for equipment functionality and/or monitoring during testing. The compliance levels achieved in this report relate only to the EUT and not items given in the following list.

*Not Applicable – No support/monitoring equipment required.*

### **7.3 EUT Mode of Operation**

#### **7.3.1 Transmission**

The mode of operation for transmitter tests was as follows:-

The equipment under test was set to permanent transmit a modulated carrier on the required frequency.

#### **7.3.2 Reception**

The mode of operation for receiver tests was as follows:-

The equipment under test was permanently set to receive / transmit standby mode.

## 7.4 EUT Radio Parameters

### 7.4.1 General

<b>Frequency of operation:</b>	914.5 MHz
<b>Modulation type(s):</b>	FM
<b>Occupied channel bandwidth(s):</b>	Wideband
<b>Channel spacing:</b>	Wideband
<b>Warning against use of alternative antennas in user manual (yes/no):</b>	N/A
<b>Nominal Supply Voltage:</b>	3.6 Vdc
<b>Location of notice for license exempt use:</b>	Label / user manual / both.
<b>Duty cycle:</b>	100% (for test)

### 7.4.2 Antennas

<b>Type:</b>	Helical
<b>Frequency range:</b>	914.5MHz
<b>Impedance:</b>	50 ohms
<b>SWR:</b>	9.2856
<b>Gain:</b>	0dBi
<b>Polarisation:</b>	Vertical
<b>Beam width:</b>	Near omni-directional (in Horizontal Plane)
<b>Connector type:</b>	TNC Male
<b>Length:</b>	67.0 +/-2.0 mm
<b>Weight:</b>	10.5 grammes
<b>Environmental limits:</b>	20°C to +60°C
<b>Mounting:</b>	TNC Connector

## 7.5 EUT Description

Transceiver to allow for data collection and remote configuration.

The product is a sensitive microphone with analysis and recording function. It contains a radio Transceiver to allow for data collection and remote configuration.

## **8 Modifications**


No modifications were performed during this assessment.

## 9 EUT Test Setup

### 9.1 Block Diagram

The following diagram shows basic EUT interconnections with cable type and cable lengths identified:

The equipment under test is a stand-alone battery operated device.



## 9.2 General Set-up Photograph

The following photograph shows basic EUT set-up:



## 10 General Technical Parameters

### 10.1 Normal Conditions

The E U T was tested under the normal environmental conditions of the test laboratory, except where otherwise stated. The normal power source applied was approx. 3.6 V dc from batteries.

### 10.2 Varying Test Conditions

There are no specific frequency stability requirements for the type of device. The results contained in this report demonstrate that the occupied bandwidth is contained within the authorised band and the manufacturer has declared sufficient frequency stability (refer to section 7.4).

Variation of supply voltage is required to ensure stability of the declared output power. During carrier power testing the following variations were made:

	<i>Category</i>	<i>Nominal</i>	<i>Variation</i>
<input type="checkbox"/>	Mains	110 V ac +/-2 %	85 % and 115 %
<input checked="" type="checkbox"/>	Battery	New battery	N/A

11 Radiated emissions

11.1 Definitions

*Out-of-band emissions*

Emissions on a frequency or frequencies immediately outside the necessary bandwidth which result from the modulation process, but exclude spurious emissions.

*Spurious emissions*

Emissions on a frequency or frequencies which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products, but exclude out-of-band emissions.

*Restricted bands*

A frequency band in which intentional radiators are permitted to radiate only spurious emissions but not fundamental signals.

11.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.5 and 6.6
EUT Channels / Frequencies Measured:	914.51MHz
EUT Channel Bandwidths:	Wideband
Deviations From Standard:	None
Measurement BW:	30 MHz to 1 GHz: 120 kHz Above 1 GHz: 1 MHz
Measurement Detector:	Up to 1 GHz: quasi-peak Above 1 GHz: RMS average and Peak

Environmental Conditions (Normal Environment)

Temperature: 24.8 °C	+15 °C to +35 °C (as declared)
Humidity: 41 % RH	20 % RH to 75 % RH (as declared)
Supply: 3.6 Vdc	



### 11.3 Test Limit

Except for harmonics, out-of-band emissions shall be attenuated by at least 50 dB below the level of the fundamental or to the general field strength limits listed in FCC 47CFR15.209, whichever is less stringent.

Harmonics shall be limited to a maximum level of 0.5 mV/m measured at 3 metres.

#### General Field Strength Limits for License-Exempt Transmitters at Frequencies above 30 MHz

<i>Frequency (MHz)</i>	<i>Field Strength (<math>\mu</math>V/m at 3 m)</i>
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

n.b. per FCC 47CFR15.35(b) / RSS-Gen 8.1, peak limit is 20 dB above average.

## 11.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure i, the emissions from the EUT were measured on a spectrum analyzer / EMI receiver.

Radiated electromagnetic emissions from the EUT are checked first by preview scans. Preview scans for all spectrum and modulation characteristics are checked, using a peak detector and where applicable worst-case determined for function, operation, orientation, etc. for both vertical and horizontal polarisations. Pre-scan plots are shown with a peak detector and 100 kHz RBW.

If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in ANSI C63.10 are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed, (see EUT setup photographs for more detail).

Emissions between 30 MHz and 1 GHz are measured using calibrated broadband antennas. Emissions above 1 GHz are characterized using standard gain horn antennas. Pre-amplifiers and filters are used where required. Care is taken to ensure that test receiver resolution bandwidth, video bandwidth and detector type(s) meet the regulatory requirements.

For both horizontal and vertical polarizations, the EUT is then rotated through 360 degrees in azimuth until the highest emission is detected. At the previously determined azimuth the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected, this maximum value is recorded.

Power values measured on the test receiver / analyzer are converted to field strength, FS, in dBμV/m at the regulatory distance, using:

$$FS = PR + CL + AF - PA + DC - CF$$

Where,

PR is the power recorded on the receiver / spectrum analyzer in dBμV;

CL is the cable loss in dB;

AF is the test antenna factor in dB/m;


PA is the pre-amplifier gain in dB (where used);

DC is the duty correction factor in dB (where used, e.g. harmonics of pulsed fundamental);

CF is the distance factor in dB (where measurement distance different to limit distance);

This field strength value is then compared with the regulatory limit.

**Figure i Test Setup**

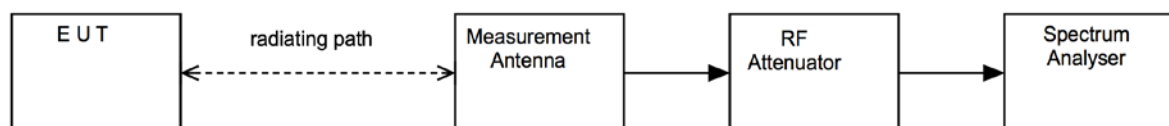


### 11.5 Test Set-up Photograph



### 11.6 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
ESVS10	R&S	Receiver	L317	22/03/2018
FSU46	R&S	Spectrum Analyser	U281	19/06/2018
8449B	Agilent	Pre Amp	U457	26/07/2018
3115	EMCO	1-18GHz Horn	L139	25/09/2019
CBL611/A	Chase	Bilog	U191	23/02/2019

11.7 Test Results

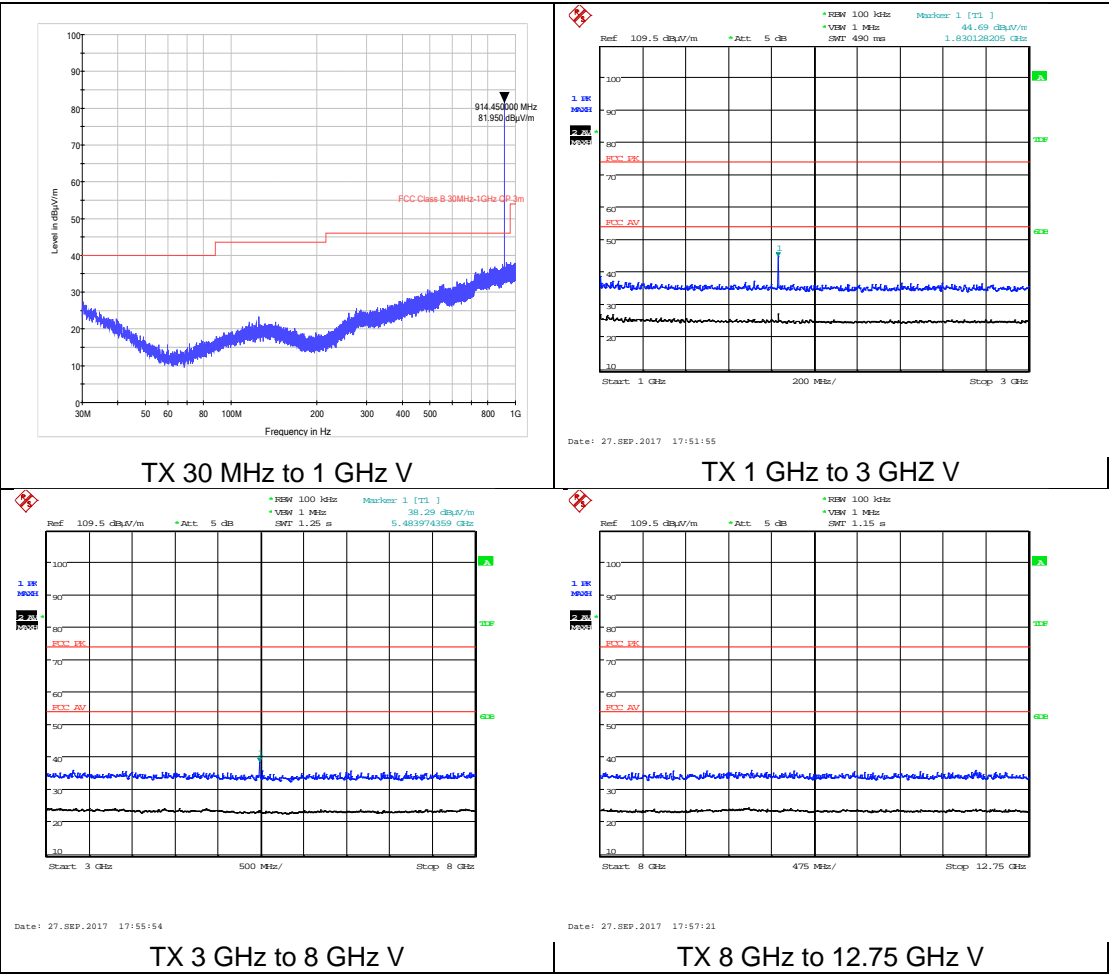

Detector	Freq. (MHz)	Meas'd Emission (dBμV)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp Gain (dB)	Duty Cycle Corr'n (dB)	Distance Extrap'n Factor (dB)	Field Strength (dBμV/m)	Field Strength (μV/m)	Limit (μV/m)
Pk	1828.99	49.24	2.50	27.10	35.38	0.00	0.00	43.46	148.94	5000
Av	1828.99	44.92	2.50	27.10	35.38	0.00	0.00	39.14	90.57	500
Pk	2743.45	37.44	3.00	29.30	35.53	0.00	0.00	34.21	51.35	5000
Av	2743.45	24.07	3.00	29.30	35.53	0.00	0.00	20.84	11.02	500

## 12 Occupied Bandwidth

### 12.1 Definitions

#### *Occupied bandwidth*

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to 0.5 % of the emitted power. This is also known as the *99 % emission bandwidth*. For transmitters in which there are multiple carriers, contiguous or non-contiguous in frequency, the occupied bandwidth is to be the sum of the occupied bandwidths of the individual carriers.

#### *20 dB bandwidth*

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal.

### 12.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.9
EUT Channels / Frequencies Measured:	914.5 MHz
EUT Channel Bandwidths:	Wideband
Deviations From Standard:	None
Measurement BW:	5 kHz
(requirement: 1 % to 5 % OBW)	
Spectrum Analyzer Video BW:	20 kHz
(requirement at least 3x RBW)	
Measurement Span:	1MHz
(requirement 2 to 5 times OBW)	
Measurement Detector:	Peak

### Environmental Conditions (Normal Environment)

Temperature: 24 °C	+15 °C to +35 °C (as declared)
Humidity: 42 % RH	20 % RH to 75 % RH (as declared)

### 12.3 Test Limit

#### Industry Canada:

If the frequency stability of the license-exempt radio apparatus is not specified in the applicable standard (RSS), measurement of the frequency stability is not required provided that the occupied bandwidth of the license-exempt radio apparatus lies entirely outside the restricted bands and the prohibited TV bands of 54 to 72 MHz, 76 to 88 MHz, 174 to 216 MHz, 470 to 608 MHz and 614 to 806 MHz.

#### Federal Communications Commission:


Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

12.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure iii, the bandwidth of the EUT was measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.

Figure iii Test Setup



12.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
FSU46	R&S	Spectrum Analyser	U281	19/06/2018



## 13 Transmitter output power (fundamental radiated emission)

### 13.1 Definition

The RF power dissipated in the standard output termination when operating under the rated duty cycle selected by the applicant for approval.

### 13.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.5 / 6.6
EUT Channels / Frequencies Measured:	914.5 MHz
EUT Channel Bandwidths:	Wide Band
Deviations From Standard:	None
Measurement BW:	120 kHz
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	N/A
Measurement Detector:	Up to 1 GHz: Quasi-peak Above 1 GHz: Average RMS and Peak
Voltage Extreme Environment Test Range:	Mains Power = 85 % and 115 % of Nominal (FCC only requirement); Battery Power = new battery.

### Environmental Conditions (Normal Environment)

Temperature: 24.5 °C	+15 °C to +35 °C (as declared)
Humidity: 42 % RH	20 % RH to 75 % RH (as declared)

### 13.3 Test Limit

The field strength measured at 3 metres shall not exceed the limits in the following table:

**Field Strength Limits for License-Exempt Transmitters for Any Application**

<i><b>Fundamental frequency (MHz)</b></i>	<i><b>Field strength (mV/m at 3 m)</b></i>	<i><b>Detector</b></i>
902 to 928	50	Quasi-Peak
2400 to 2483.5	50	Average RMS
5725 to 5875	50	Average RMS

n.b. per FCC 47CFR15.249(e) / RSS-Gen 8.1, peak limit is 20 dB above average.




### 13.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure iv, the resolution bandwidth of the spectrum analyser was increased above the EUT occupied bandwidth and the peak emission data noted.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.

**Figure iv Test Setup**



### 13.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
ESVS10	R&S	Receiver	L317	22/03/2018
CBL611/A	Chase	Bilog	U191	23/02/2019

### 13.6 Test Results

Detector	Freq. (MHz)	Meas'd Emission (dBμV)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp Gain (dB)	Duty Cycle Corr'n (dB)	Distance Extrap'n Factor (dB)	Field Strength (dBμV/m)	Field Strength (mV/m)	Limit (mV/m)
QP	914.46	57.00	3.97	29.25	N/A	0.00	0.00	90.22	32.434	50

## 14 Radiated emissions – unintentional radiation / receiver emissions

### 14.1 Definitions

#### *Receiver spurious emissions*

The radio frequency signals generated within the receiver, which may cause interference to other equipment. This includes the period during which the equipment is scanning or switching channels.

#### *Unintentional radiator*

A device that generates RF energy which is not intended to be radiated for reception by a radio receiver.

### 14.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.5 and 6.6
EUT Channels / Frequencies Measured:	914.51MHz
EUT Channel Bandwidths:	Wideband
Deviations From Standard:	None
Measurement BW:	30 MHz to 1 GHz: 120 kHz Above 1 GHz: 1 MHz
Measurement Detector:	Up to 1 GHz: quasi-peak Above 1 GHz: Peak

### Environmental Conditions (Normal Environment)

Temperature: 24.8 °C	+15 °C to +35 °C (as declared)
Humidity: 41 % RH	20 % RH to 75 % RH (as declared)
Supply: 3.6 V dc	

### 14.3 Test Limit

#### Note:

Only radio communication receivers operating in stand-alone mode within the band 30 to 960 MHz, as well as scanner receivers, are subject to requirements, as described above. All other receivers are exempted from any certification, testing, labelling and reporting requirements.

However, all receivers in all frequency bands shall comply with the limits set forth in FCC 47CFR15B even in cases where testing, reporting and/or certification are not required.

#### Receiver Radiated Limits

Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500


#### 14.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure viii, the emissions from the EUT were measured on a spectrum analyzer / EMI receiver. The EUT was rotated in three orthogonal planes and the measurement antenna height scanned (below 1 GHz, from 1 to 4 m; above 1 GHz as necessary) in order to maximise emissions.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration at each frequency.

Pre-scan plots are shown with a peak detector and 100 kHz RBW.

**Figure viii Test Setup**

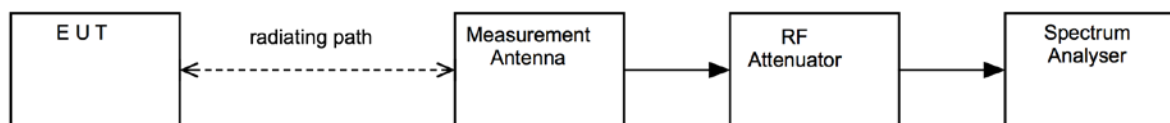


**Test Setup Photograph(s)**



14.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
ESVS10	R&S	Receiver	L317	22/03/2018
FSU46	R&S	Spectrum Analyser	U281	19/06/2018
8449B	Agilent	Pre Amp	U457	26/07/2018
3115	EMCO	1-18GHz Horn	L139	25/09/2019
CBL611/A	Chase	Bilog	U191	23/02/2019

14.6 Test Results

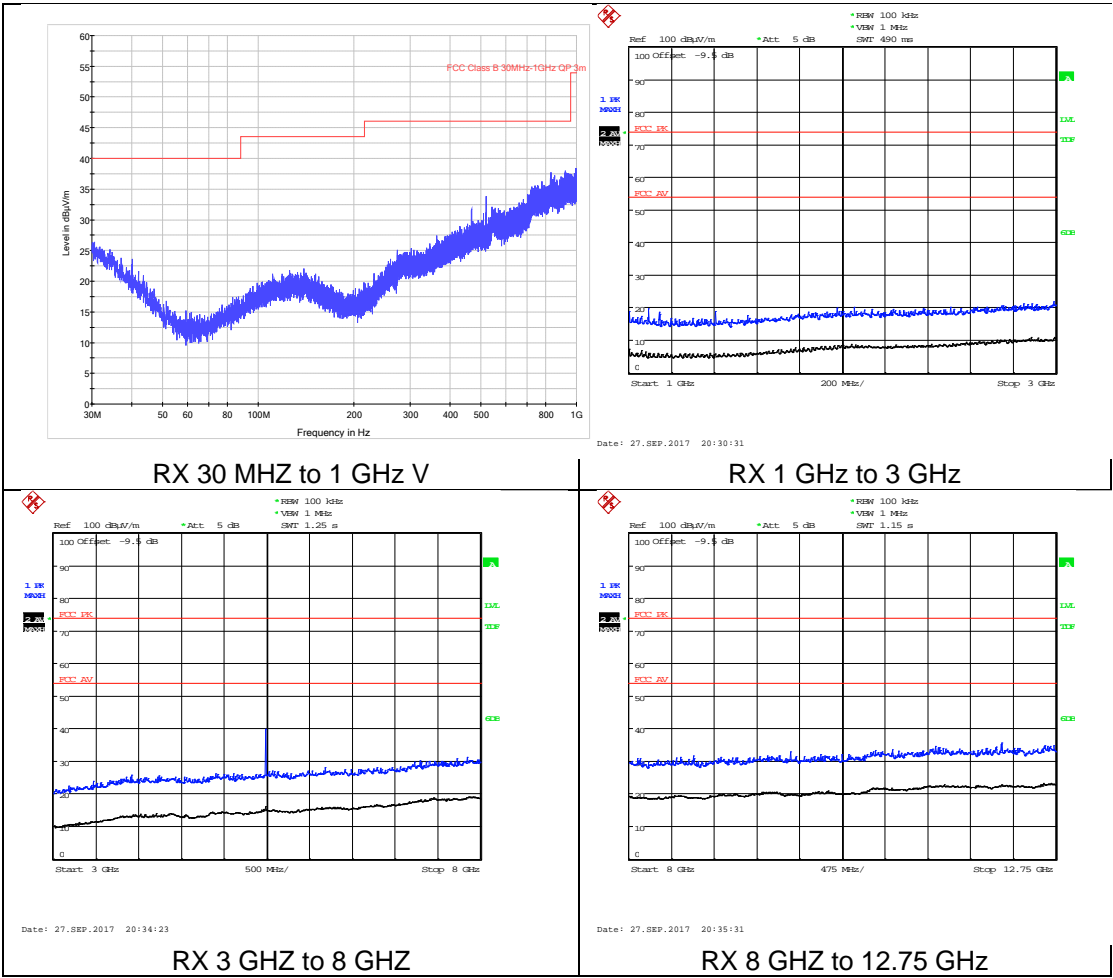

## 15 Measurement Uncertainty

### Calculated Measurement Uncertainties

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95 % confidence:

#### [1] Carrier power

Uncertainty in test result (Power Meter) = **1.08 dB**

Uncertainty in test result (Spectrum Analyser) = **2.48 dB**

#### [2] Spurious emissions

Uncertainty in test result (30 MHz to 1 GHz) = **4.6 dB**

Uncertainty in test result (1 GHz to 18 GHz) = **4.7 dB**

#### [3] AC power line conducted emissions

Uncertainty in test result = **3.4 dB**

#### [4] Occupied bandwidth

Uncertainty in test result = **15.5 %**

#### [5] Maximum frequency error

Uncertainty in test result (Power Meter) = **0.113 ppm**

Uncertainty in test result (Spectrum Analyser) = **0.265 ppm**

#### [6] Duty cycle

Uncertainty in test result = **7.98 %**