

E52RCT

SAM II Phantom; Left Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(5.29,5.29,5.29); Crest factor: 8.0; Brain 1900 MHz: $\sigma = 1.40$ mho/m $\epsilon_r = 40.3$ $\rho = 1.00$ g/cm³

Cube 5x5x7; SAR (1g): 1.16 mW/g, SAR (10g): 0.695 mW/g

Coarse: Dx = 17.0, Dy = 17.0, Dz = 10.0

Powerdrift: -0.11 dB

Comment:

FCC ID : RV2E52RCT / MODEL : E52RCT


Company : Ezze Mobile Tech., Inc.

Test Position: Left Touch / Antenna: Fixed

Mode: GSM1900 / Channel : 512

Liquid Temperature: 21.9°C

Date Tested : February 13, 2004

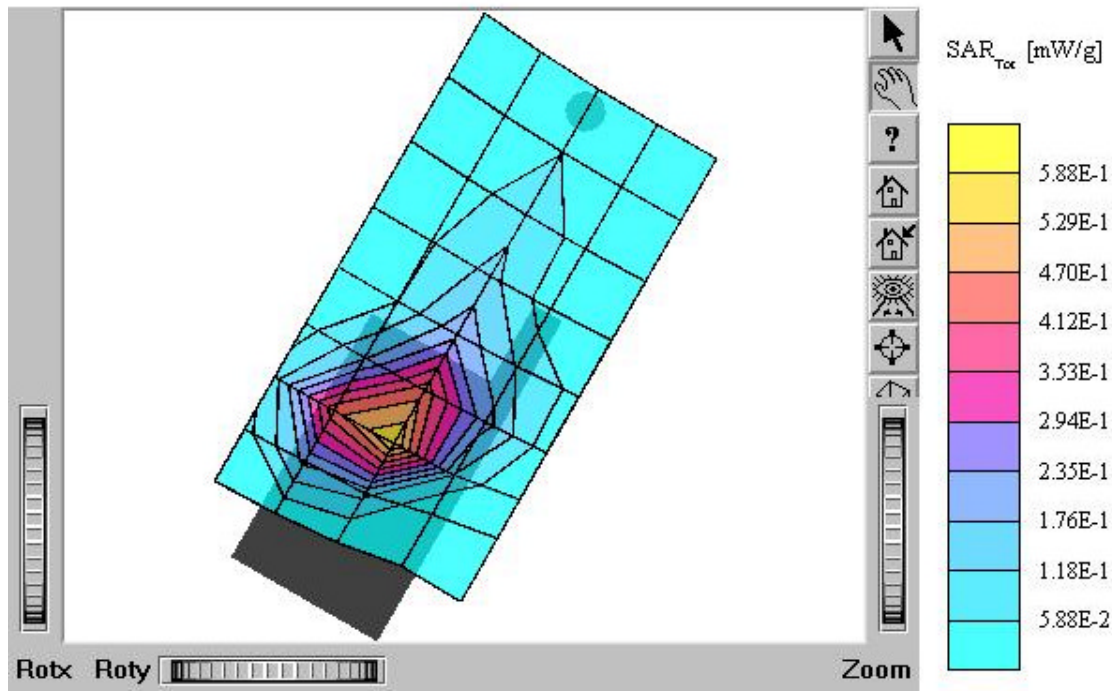

E52RCT

SAM II Phantom; Left Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(5.29,5.29,5.29); Crest factor: 8.0; Brain 1900 MHz: $\sigma = 1.40$ mho/m $\epsilon_r = 40.3$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 1.13 mW/g, SAR (10g): 0.677 mW/g

Coarse: Dx = 17.0, Dy = 17.0, Dz = 10.0

Powerdrift: -0.29 dB

Comment:

FCC ID : RV2E52RCT / MODEL : E52RCT


Company : Ezze Mobile Tech., Inc.

Test Position: Left Touch / Antenna: Fixed

Mode: GSM1900 / Channel : 661

Liquid Temperature: 21.9°C

Date Tested : February 13, 2004

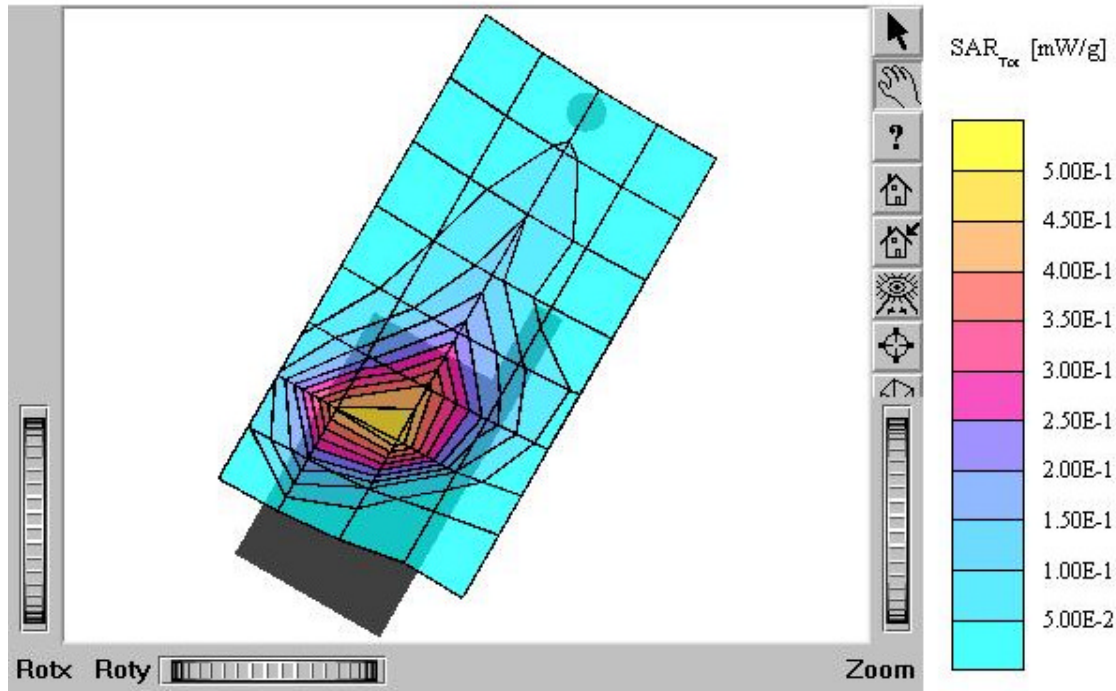

E52RCT

SAM II Phantom; Left Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(5.29,5.29,5.29); Crest factor: 8.0; Brain 1900 MHz: $\sigma = 1.40$ mho/m $\epsilon_r = 40.3$ $\rho = 1.00$ g/cm³

Cube 5x5x7; SAR (1g): 1.12 mW/g, SAR (10g): 0.641 mW/g

Coarse: Dx = 17.0, Dy = 17.0, Dz = 10.0

Powerdrift: -0.14 dB

Comment:

FCC ID : RV2E52RCT / MODEL : E52RCT


Company : Ezze Mobile Tech., Inc.

Test Position: Left Touch / Antenna: Fixed

Mode: GSM1900 / Channel : 810


Liquid Temperature: 21.9°C

Date Tested : February 13, 2004

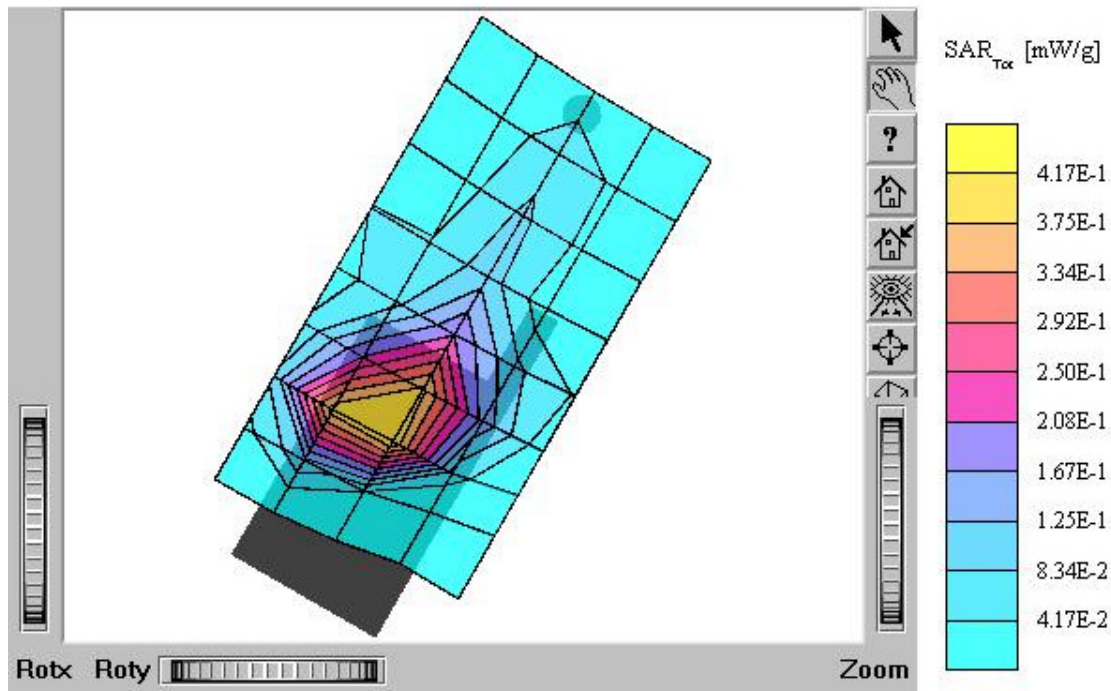


E52RCT

SAM II Phantom; Right Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(5.29,5.29,5.29); Crest factor: 8.0; Brain 1900 MHz: $\sigma = 1.40$
mho/m $\epsilon_r = 40.3$ $\rho = 1.00$ g/cm³
Cube 5x5x7; SAR (1g): 1.25 mW/g, SAR (10g): 0.756 mW/g
Coarse: Dx = 17.0, Dy = 17.0, Dz = 10.0
Powerdrift: -0.19 dB
Comment:
FCC ID : RV2E52RCT / MODEL : E52RCT
Company : Ezze Mobile Tech., Inc.
Test Position: Right Touch / Antenna: Fixed
Mode: GSM1900 / Channel : 512
Liquid Temperature: 21.9°C
Date Tested : February 13, 2004

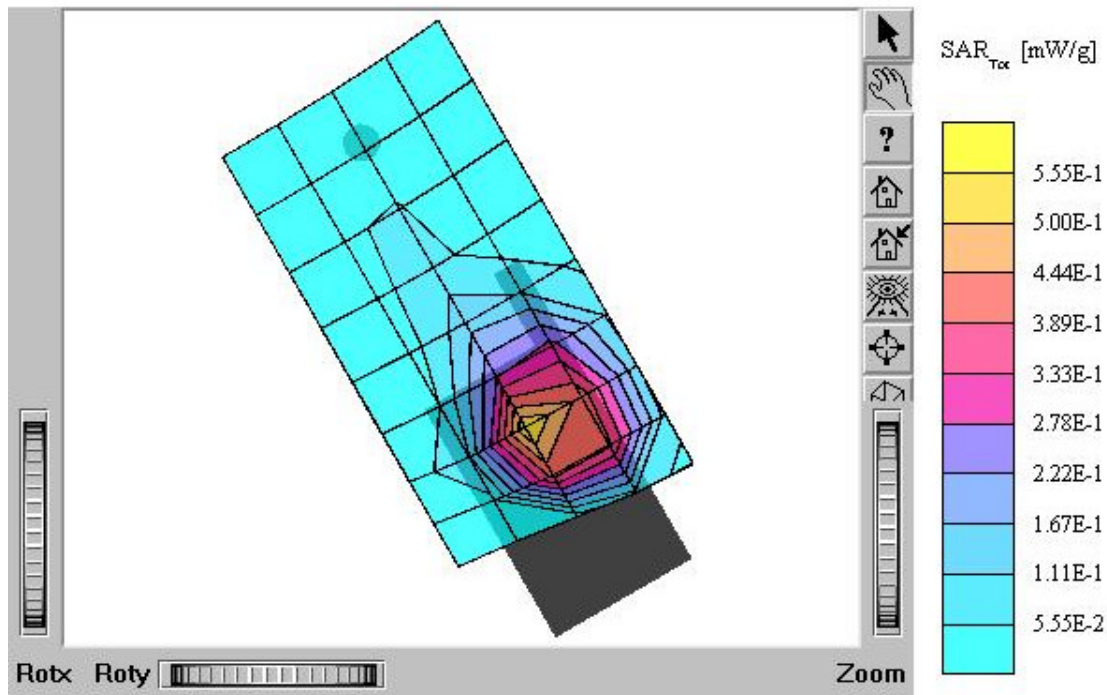


E52RCT

SAM II Phantom: Right Hand [CRP] Section: Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(5.29,5.29,5.29); Crest factor: 8.0; Brain 1900 MHz: $\sigma = 1.40$
mho/m $\epsilon_r = 40.3$ $\rho = 1.00$ g/cm³
Cube 5x5x7; SAR (1g): 1.28 mW/g, SAR (10g): 0.767 mW/g
Coarse: Dx = 17.0, Dy = 17.0, Dz = 10.0
Powerdrift: -0.09 dB
Comment:
FCC ID : RV2E52RCT / MODEL : E52RCT
Company : Ezze Mobile Tech., Inc.
Test Position: Right Touch / Antenna: Fixed
Mode: GSM1900 / Channel : 661
Liquid Temperature: 21.9°C
Date Tested : February 13, 2004

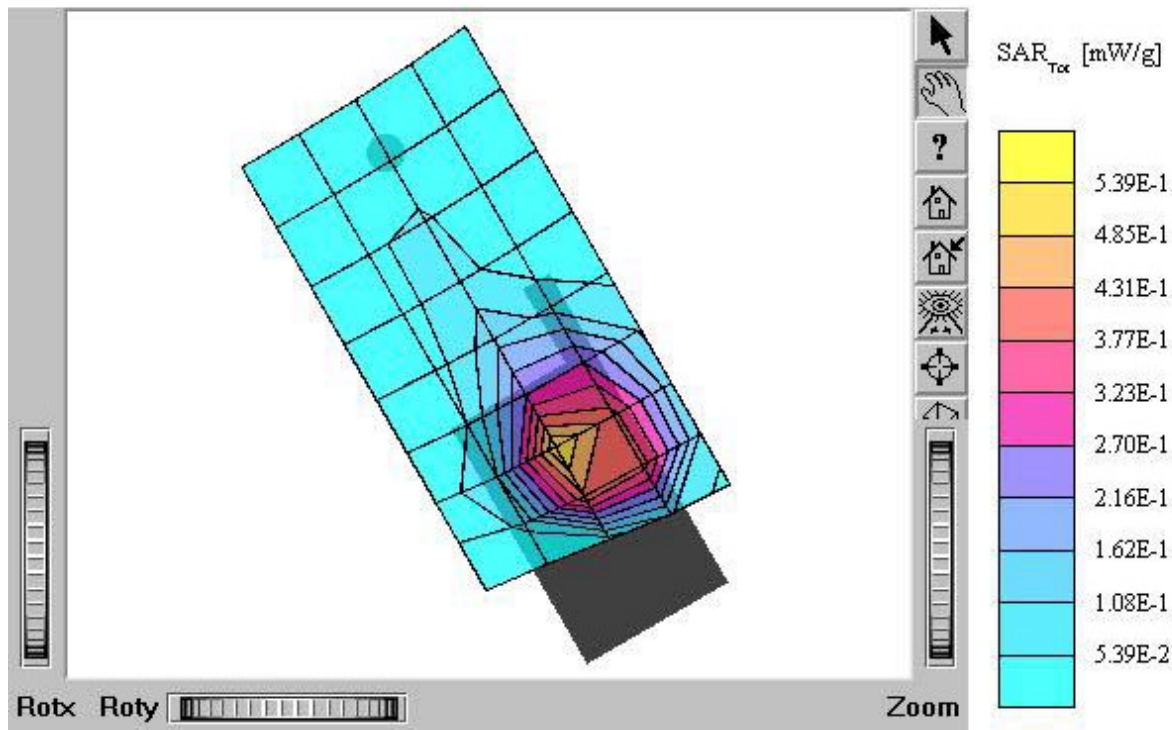


E52RCT

SAM II Phantom; Right Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(5.29,5.29,5.29); Crest factor: 8.0; Brain 1900 MHz: $\sigma = 1.40$
mho/m $\epsilon_r = 40.3$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 1.21 mW/g, SAR (10g): 0.712 mW/g
Coarse: Dx = 17.0, Dy = 17.0, Dz = 10.0
Powerdrift: -0.05 dB
Comment:
FCC ID : RV2E52RCT / MODEL : E52RCT
Company : Ezze Mobile Tech., Inc.
Test Position: Right Touch / Antenna: Fixed
Mode: GSM1900 / Channel : 810
Liquid Temperature: 21.9°C
Date Tested : February 13, 2004

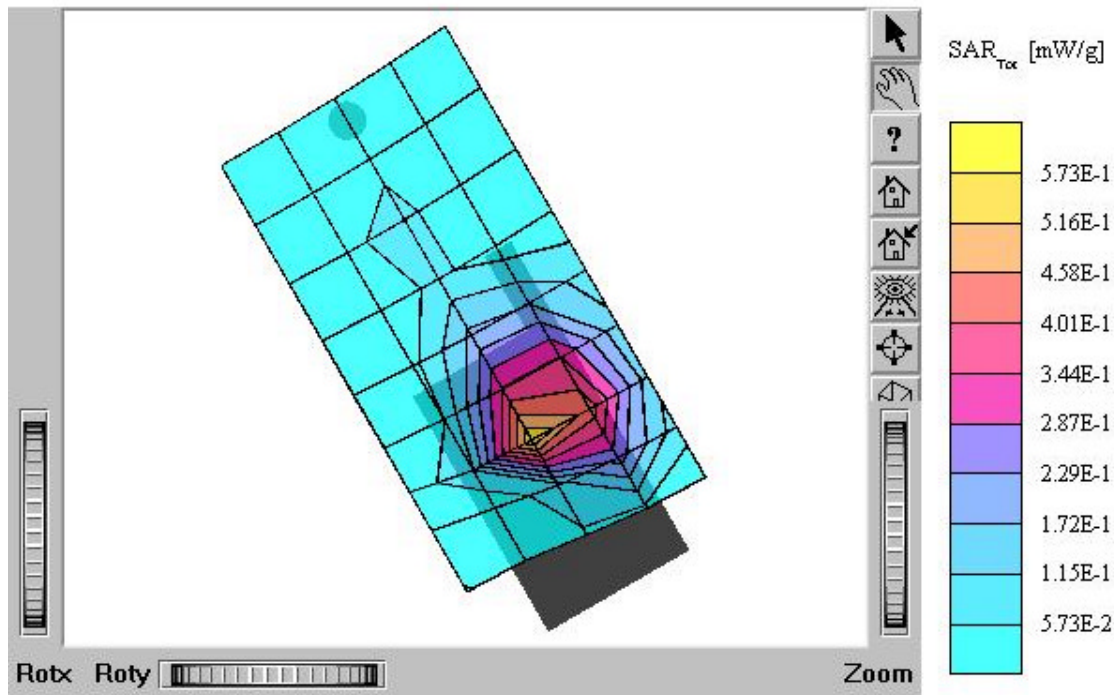


E52RCT

SAM II Phantom; Left Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(5.29,5.29,5.29); Crest factor: 8.0; Brain 1900 MHz: $\sigma = 1.40$
mho/m $\epsilon_r = 40.3$ $\rho = 1.00$ g/cm³
Cube 5x5x7; SAR (1g): 0.192 mW/g, SAR (10g): 0.121 mW/g
Coarse: Dx = 17.0, Dy = 17.0, Dz = 10.0
Powerdrift: -0.20 dB
Comment:
FCC ID : RV2E52RCT / MODEL : E52RCT
Company : Ezze Mobile Tech., Inc.
Test Position: Left Tilt / Antenna: Fixed
Mode: GSM1900 / Channel : 661
Liquid Temperature: 21.9°C
Date Tested : February 13, 2004

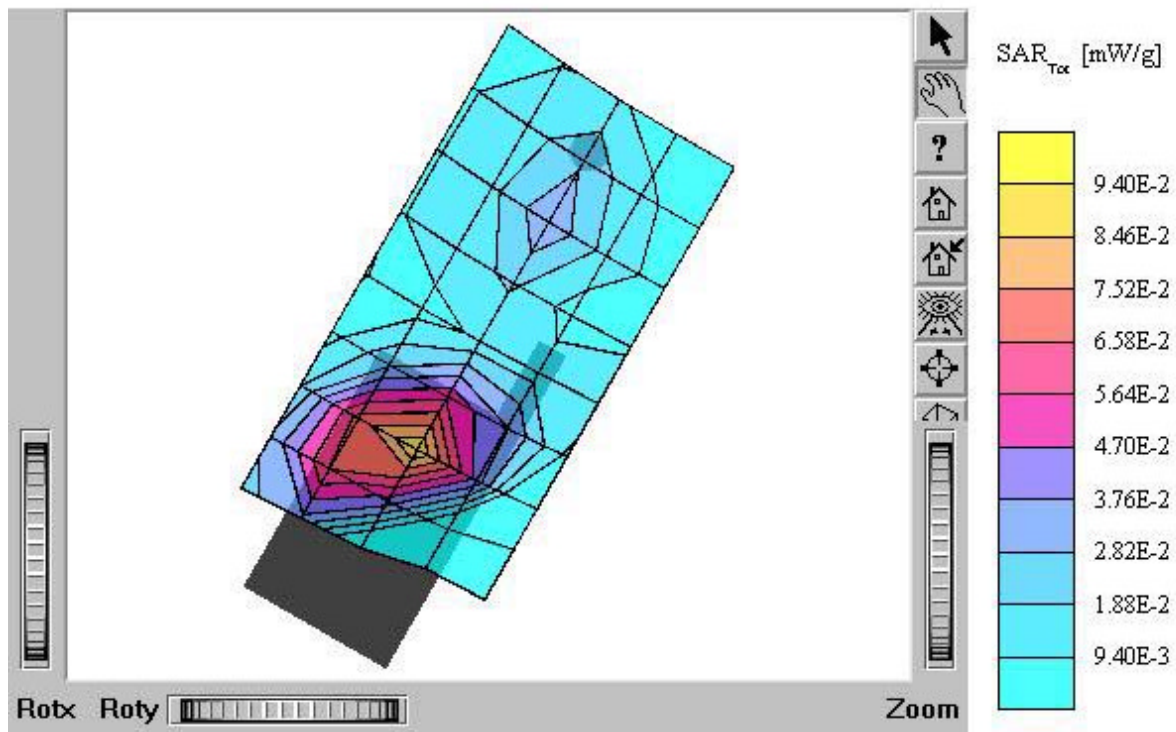

E52RCT

SAM II Phantom: Right Hand [CRP] Section: Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(5.29,5.29,5.29); Crest factor: 8.0; Brain 1900 MHz: $\sigma = 1.40$
 $\text{mho/m } \epsilon_r = 40.3$ $\rho = 1.00 \text{ g/cm}^3$
Cube 5x5x7: SAR (1g): 0.124 mW/g, SAR (10g): 0.0788 mW/g
Coarse: Dx = 17.0, Dy = 17.0, Dz = 10.0
Powerdrift: -0.33 dB
Comment:
FCC ID : RV2E52RCT / MODEL : E52RCT
Company : Ezze Mobile Tech., Inc.
Test Position: Right Tilt / Antenna: Fixed
Mode: GSM1900 / Channel : 661
Liquid Temperature: 21.9°C
Date Tested : February 13, 2004

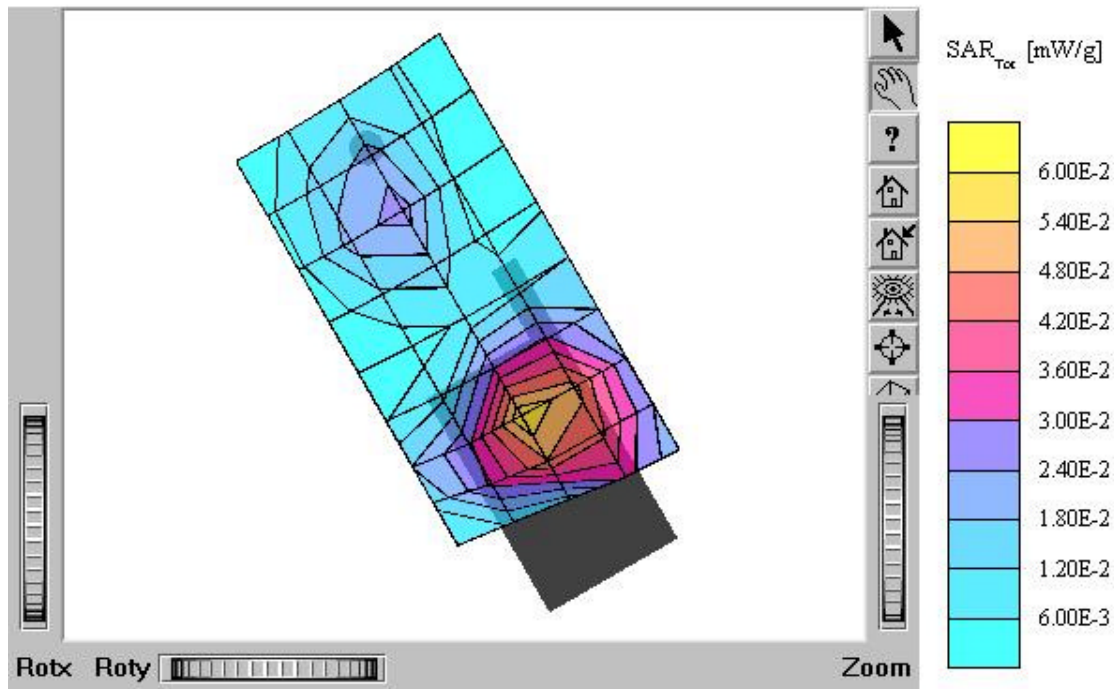

E52RCT (Body)

SAM II Phantom: Flat Section: Position: (90°,90°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(4.69,4.69,4.69); Crest factor: 8.0; Body 1900 MHz: $\sigma = 1.55$ mho/m $\epsilon_r = 53.1$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.210 mW/g, SAR (10g): 0.126 mW/g

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: -0.06 dB

Comment:

FCC ID : RV2E52RCT / MODEL : E52RCT


Company : Ezze Mobile Tech., Inc.

Test Position: Body / Antenna: Fixed

Mode: GSM1900 / Channel : 512

Liquid Temperature: 21.9°C

Date Tested : February 13, 2004

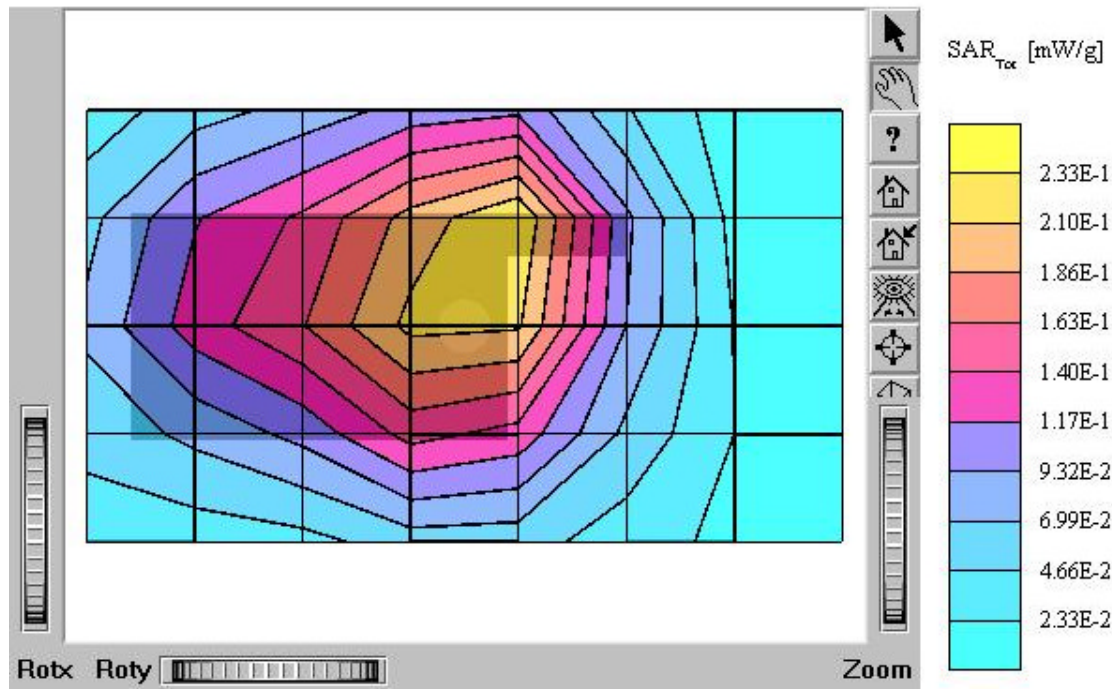

E52RCT (Body)

SAM II Phantom: Flat Section: Position: (90°,90°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(4.69,4.69,4.69); Crest factor: 8.0; Body 1900 MHz: $\sigma = 1.55$ mho/m $\epsilon_r = 53.1$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.199 mW/g, SAR (10g): 0.118 mW/g

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: -0.02 dB

Comment:

FCC ID : RV2E52RCT / MODEL : E52RCT


Company : Ezze Mobile Tech., Inc.

Test Position: Body / Antenna: Fixed

Mode: GSM1900 / Channel : 661

Liquid Temperature: 21.9°C

Date Tested : February 13, 2004

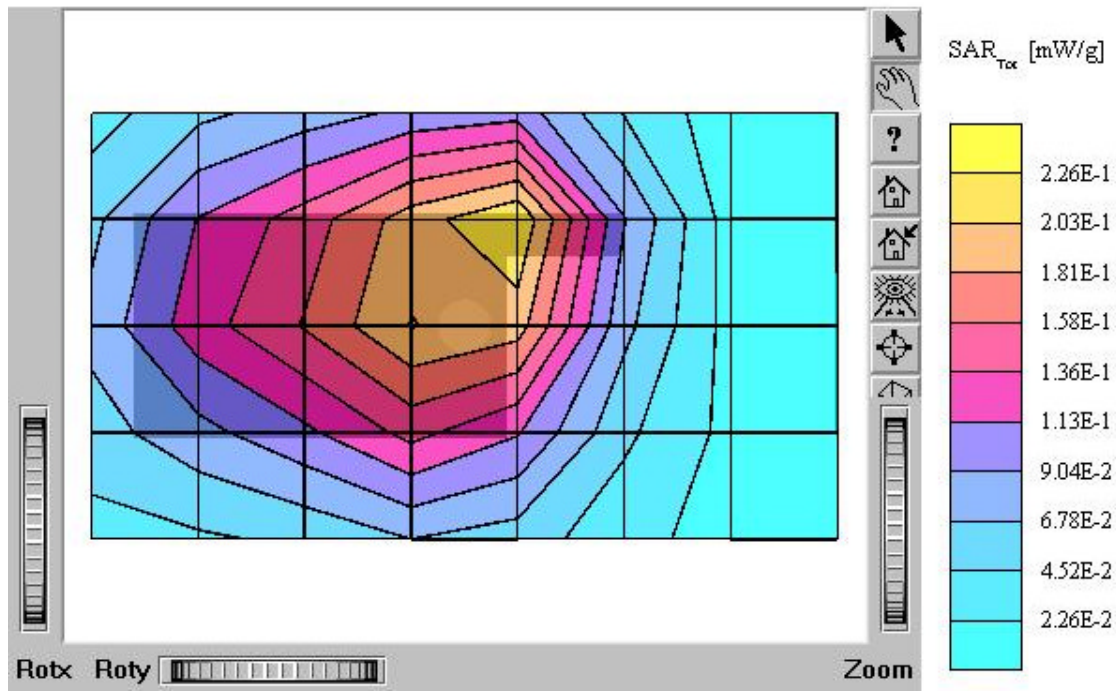

E52RCT (Body)

SAM II Phantom; Flat Section; Position: (90°,90°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(4.69,4.69,4.69); Crest factor: 8.0; Body 1900 MHz: $\sigma = 1.55$ mho/m $\epsilon_r = 53.1$ $\rho = 1.00$ g/cm³

Cube 5x5x7; SAR (1g): 0.215 mW/g, SAR (10g): 0.126 mW/g

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: -0.02 dB

Comment:

FCC ID : RV2E52RCT / MODEL : E52RCT


Company : Ezze Mobile Tech., Inc.

Test Position: Body / Antenna: Fixed

Mode: GSM1900 / Channel : 810

Liquid Temperature: 21.9°C

Date Tested : February 13, 2004

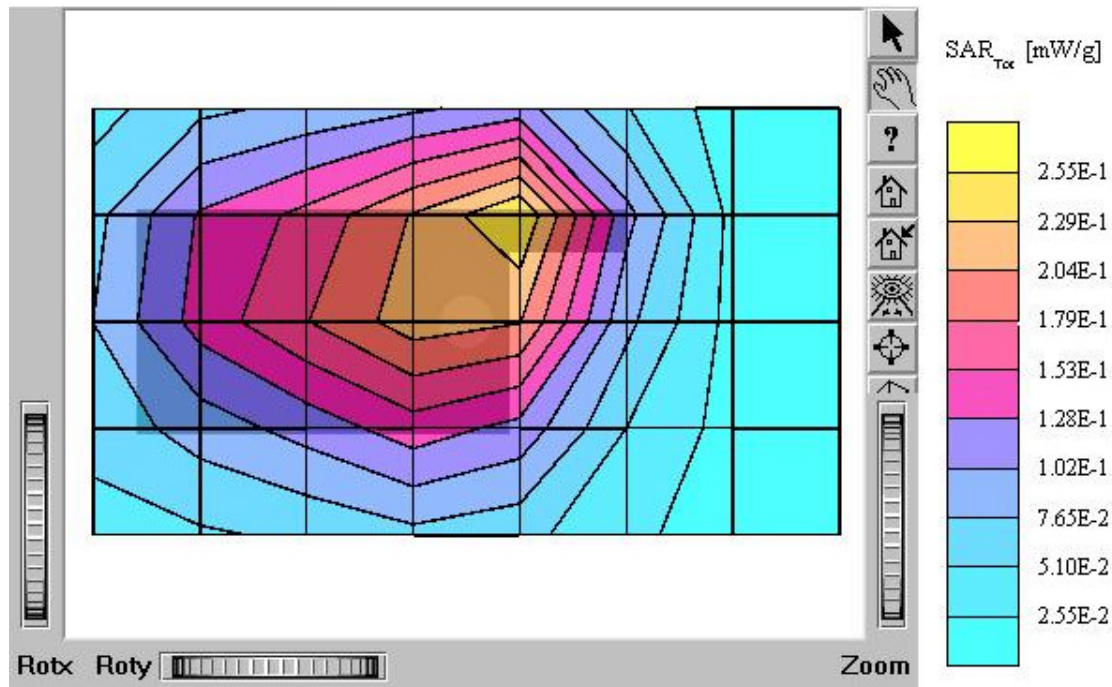


E52RCT

SAM II Phantom; Right Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(5.29,5.29,5.29); Crest factor: 8.0; Brain 1900 MHz: $\sigma = 1.40$
mho/m $\epsilon_r = 40.3$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 1.28 mW/g, SAR (10g): 0.767 mW/g
Cube 5x5x7: Dx = 8.0, Dy = 8.0, Dz = 5.0

Comment:

FCC ID : RV2E52RCT / MODEL : E52RCT
Company : Ezze Mobile Tech., Inc.
Test Position: Right Touch / Antenna: Fixed
Mode: GSM1900 / Channel : 661
Liquid Temperature: 21.9°C
Date Tested : February 13, 2004

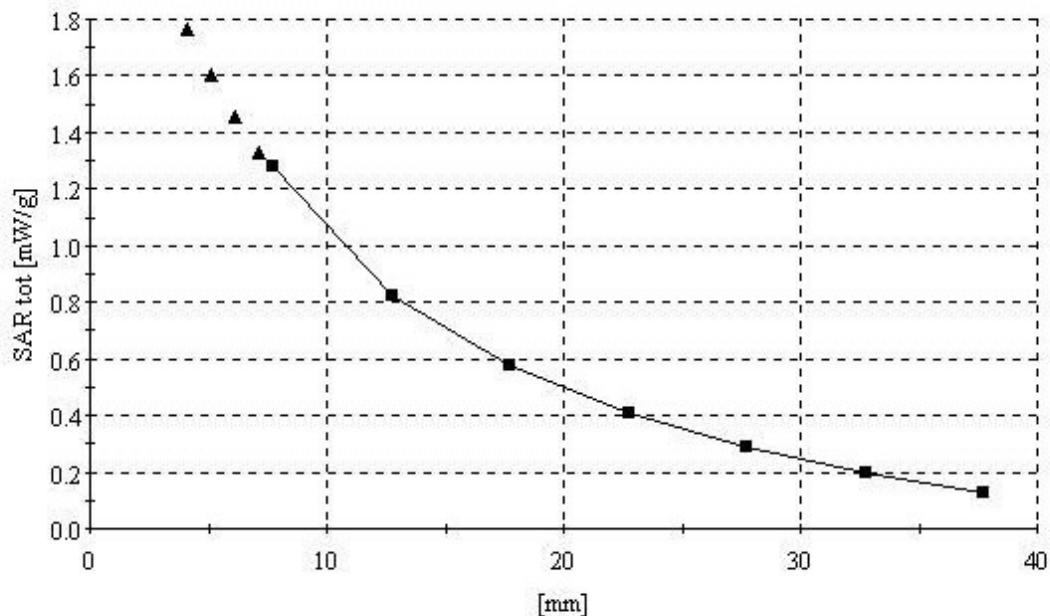

E52RCT (Body)

SAM II Phantom; Flat Section; Position: (90°,90°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(4.69,4.69,4.69); Crest factor: 8.0; Body 1900 MHz: $\sigma = 1.55$ mho/m $\epsilon_r = 53.1$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.215 mW/g, SAR (10g): 0.126 mW/g

Cube 5x5x7: Dx = 8.0, Dy = 8.0, Dz = 5.0

Comment:

FCC ID : RV2E52RCT / MODEL : E52RCT

Company : Ezze Mobile Tech., Inc.

Test Position: Body / Antenna: Fixed

Mode: GSM1900 / Channel : 810

Liquid Temperature: 21.9°C

Date Tested : February 13, 2004

