

ATTACHMENT O – SAR TEST PLOTS -1/2-

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM850 / Antenna : Fixed / Channel : 128

Liquid Temperature : 21.7 °C / Ambient Temperature: 21.9

Date Tested : July 25, 2006

DUT: EZ 700D; Type: Bar; Serial: #1

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 825$ MHz; $\sigma = 0.865$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 128/Area Scan (51x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 1.03 mW/g


Left touch 128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 32.1 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.891 mW/g; SAR(10 g) = 0.602 mW/g

Maximum value of SAR (measured) = 0.980 mW/g

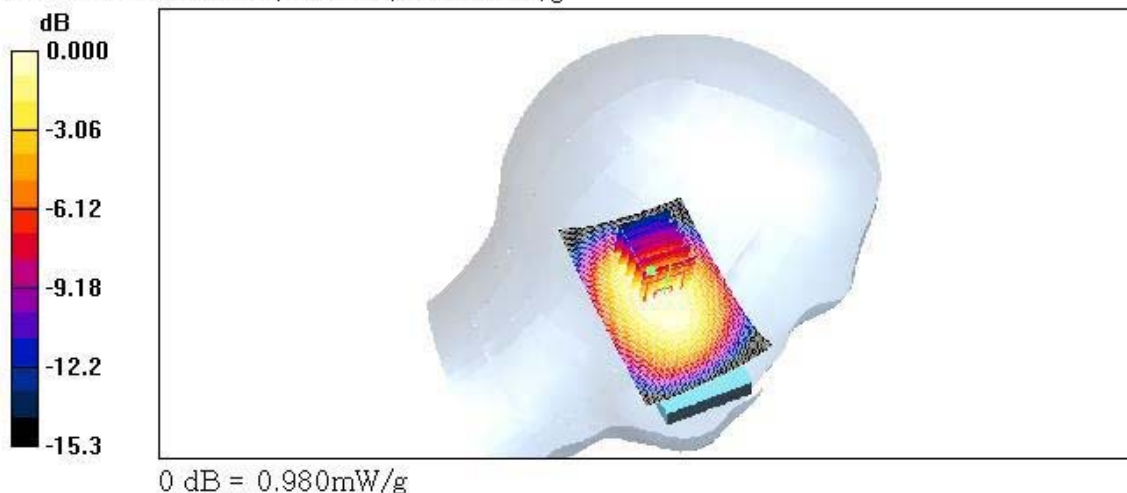

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM850 / Antenna : Fixed / Channel : 190

Liquid Temperature : 21.7 °C / Ambient Temperature: 21.9

Date Tested : July 25, 2006

DUT: EZ 700D; Type: Bar; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.876$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 190/Area Scan (51x81x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.27 mW/g

Left touch 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm


Reference Value = 35.3 V/m; Power Drift = -0.155 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.721 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.17 mW/g

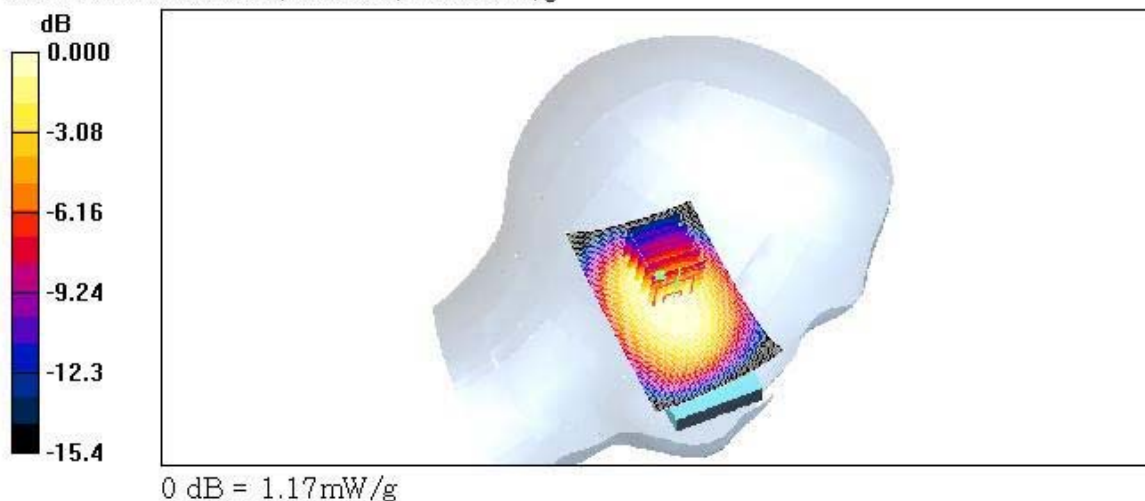

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM850 / Antenna : Fixed / Channel : 251

Liquid Temperature : 21.7 °C / Ambient Temperature: 21.9

Date Tested July 25, 2006

DUT: EZ 700D; Type: Bar; Serial: #1

Communication System: GSM 850; Frequency: 849.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 850$ MHz; $\sigma = 0.888$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 251/Area Scan (51x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 1.28 mW/g


Left touch 251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 35.2 V/m; Power Drift = -0.050 dB

Peak SAR (extrapolated) = 1.64 W/kg

SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.747 mW/g

Maximum value of SAR (measured) = 1.25 mW/g

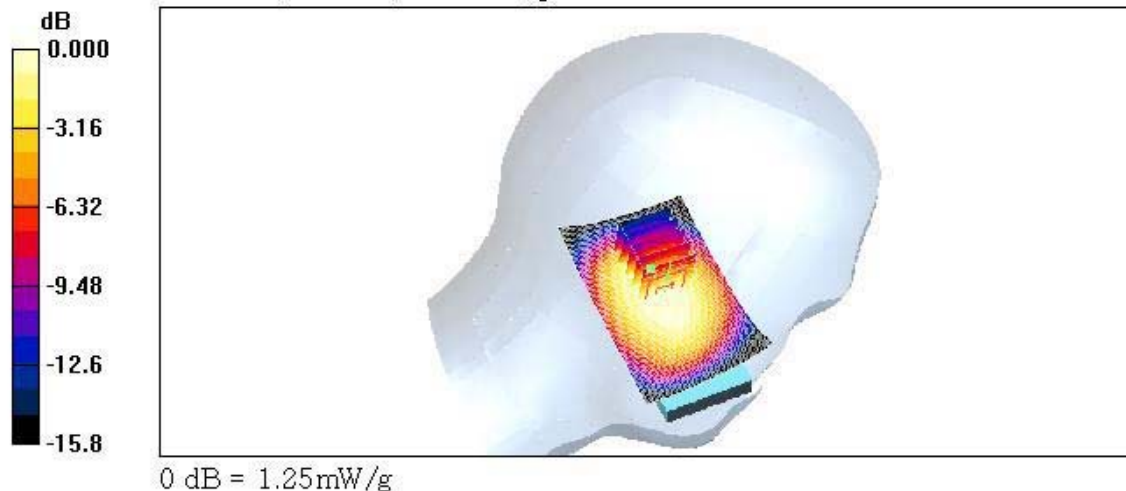

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM850 / Antenna : Fixed / Channel : 128

Liquid Temperature : 21.7 °C / Ambient Temperature: 21.9

Date Tested : July 25, 2006

DUT: EZ 700D; Type: Bar; Serial: #1

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 825$ MHz; $\sigma = 0.865$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 128/Area Scan (51x81x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Maximum value of SAR (interpolated) = 1.23 mW/g


Right touch 128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm

Reference Value = 33.4 V/m; Power Drift = -0.037 dB

Peak SAR (extrapolated) = 1.86 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.673 mW/g

Maximum value of SAR (measured) = 1.11 mW/g

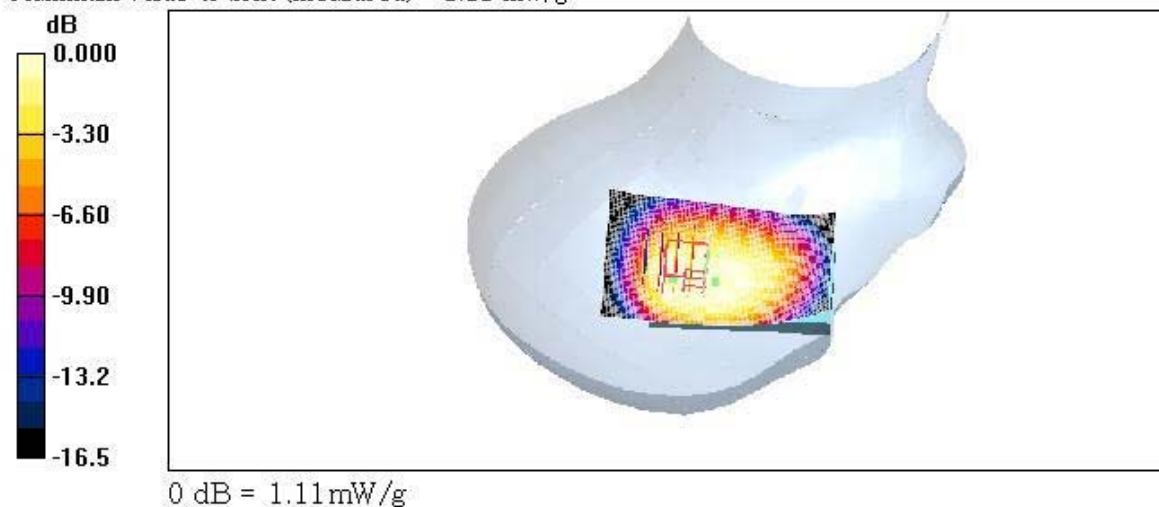

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM850 / Antenna : Fixed / Channel : 190

Liquid Temperature : 21.7 °C / Ambient Temperature: 21.9

Date Tested : July 25, 2006

DUT: EZ 700D; Type: Bar; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.876$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 190/Area Scan (51x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.55 mW/g

Right touch 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 37.2 V/m; Power Drift = -0.079 dB

Peak SAR (extrapolated) = 2.42 W/kg

SAR(1 g) = 1.24 mW/g; SAR(10 g) = 0.829 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.35 mW/g

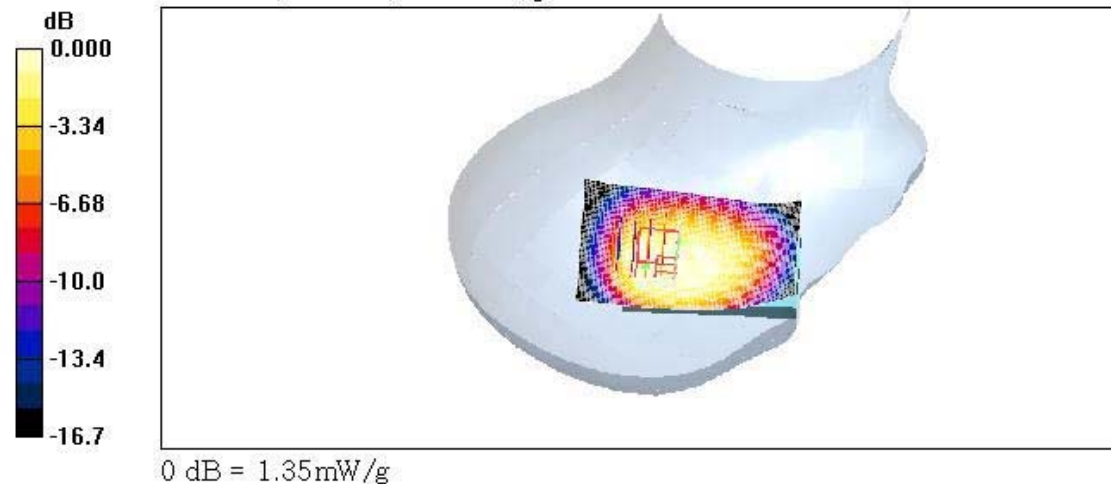

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM850 / Antenna : Fixed / Channel : 251

Liquid Temperature : 21.7 °C / Ambient Temperature: 21.9

Date Tested : July 25, 2006

DUT: EZ 700D; Type: Bar; Serial: #1

Communication System: GSM 850; Frequency: 849.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 850$ MHz; $\sigma = 0.888$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 251/Area Scan (51x81x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Maximum value of SAR (interpolated) = 1.39 mW/g


Right touch 251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm

Reference Value = 36.2 V/m; Power Drift = -0.030 dB

Peak SAR (extrapolated) = 2.02 W/kg

SAR(1 g) = 1.2 mW/g; SAR(10 g) = 0.795 mW/g

Maximum value of SAR (measured) = 1.33 mW/g

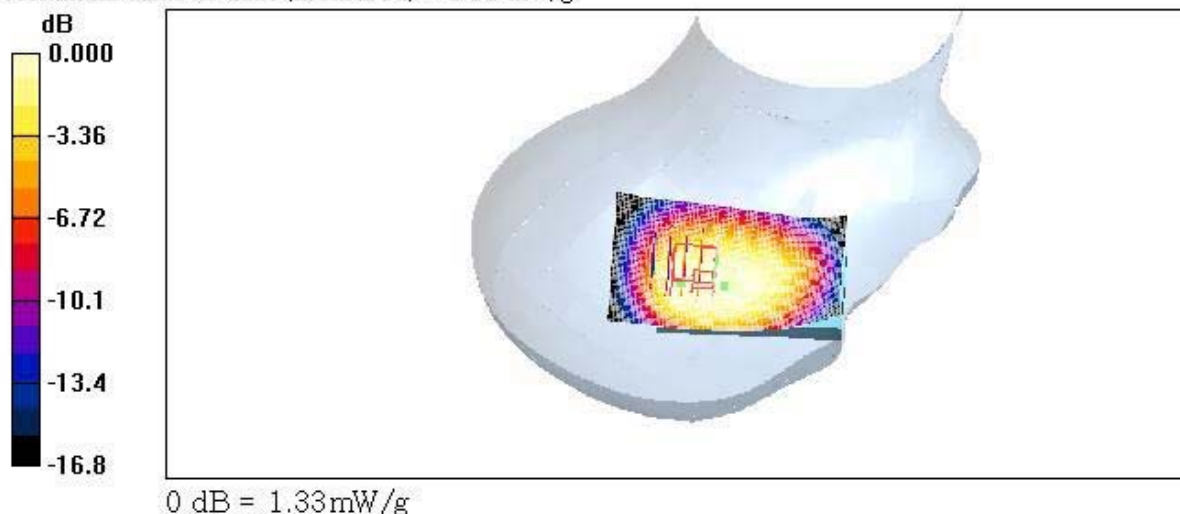

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM850 / Antenna : Fixed / Channel : 128

Liquid Temperature : 21.7 °C / Ambient Temperature: 21.9

Date Tested : July 25, 2006

DUT: EZ 700D; Type: Bar; Serial: #1

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.865 \text{ mho/m}$; $\epsilon_r = 40.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Left tilt 128/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.07 mW/g



Left tilt 128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 31.2 V/m; Power Drift = -0.134 dB

Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 0.804 mW/g; SAR(10 g) = 0.484 mW/g

Maximum value of SAR (measured) = 0.808 mW/g

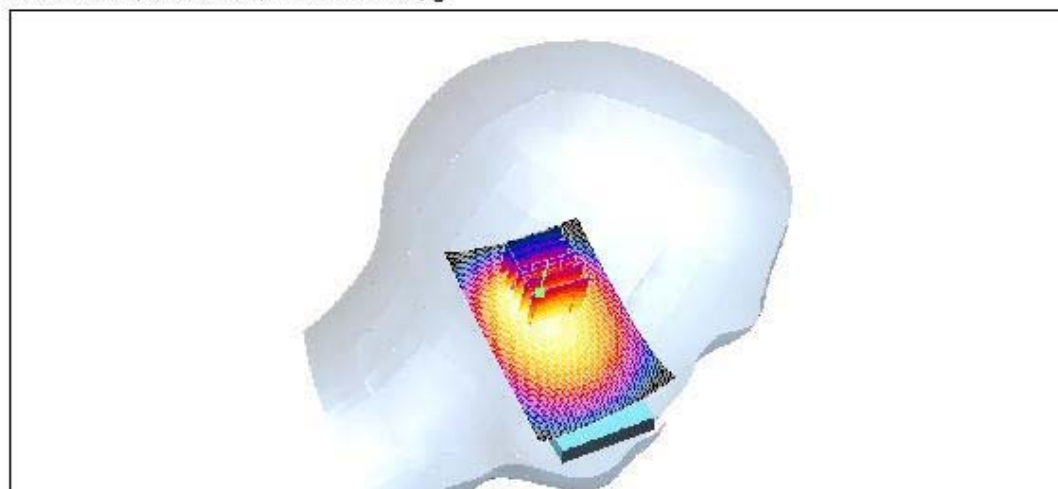

0 dB = 0.808mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM850 / Antenna : Fixed / Channel : 190

Liquid Temperature : 21.7 °C / Ambient Temperature: 21.9

Date Tested : July 25, 2006

DUT: EZ 700D; Type: Bar; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.876 \text{ mho/m}$; $\epsilon_r = 40.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Left tilt 190/Area Scan (51x81x1): Measurement grid: $\Delta x = 15\text{mm}$, $\Delta y = 15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.30 mW/g

Left tilt 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8\text{mm}$, $\Delta y = 8\text{mm}$, $\Delta z = 5\text{mm}$


Reference Value = 34.1 V/m; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 2.41 W/kg

SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.620 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.01 mW/g

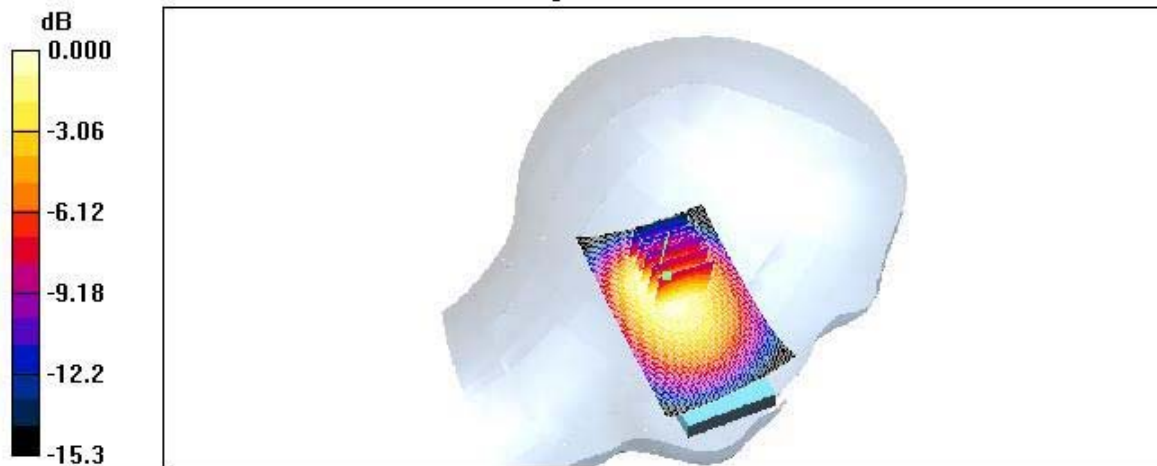

0 dB = 1.01mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM850 / Antenna : Fixed / Channel : 251

Liquid Temperature : 21.7 °C / Ambient Temperature: 21.9

Date Tested : July 25, 2006

DUT: EZ 700D; Type: Bar; Serial: #1

Communication System: GSM 850; Frequency: 849.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 850$ MHz; $\sigma = 0.888$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Left tilt 251/Area Scan (51x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 1.30 mW/g


Left tilt 251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 34.1 V/m; Power Drift = -0.080 dB

Peak SAR (extrapolated) = 2.25 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.619 mW/g

Maximum value of SAR (measured) = 1.00 mW/g

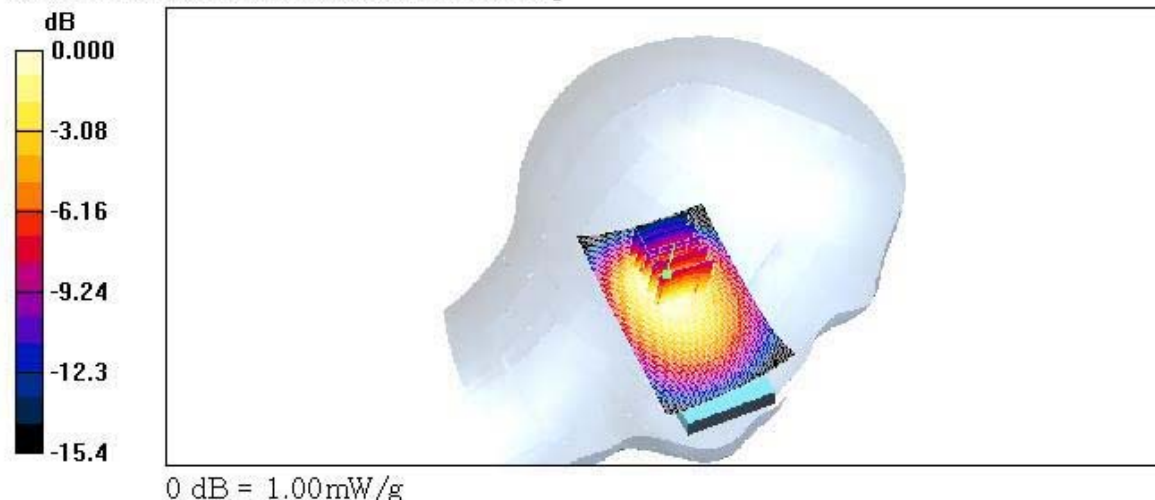

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM850 / Antenna : Fixed / Channel : 128

Liquid Temperature : 21.7 °C / Ambient Temperature: 21.9

Date Tested : July 25, 2006

DUT: EZ 700D; Type: Bar; Serial: #1

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 825$ MHz; $\sigma = 0.865$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³


Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 835/900 MHz; Type: SAM

Right tilt 128/Area Scan (51x81x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm
Maximum value of SAR (interpolated) = 1.41 mW/g

Right tilt 128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm
Reference Value = 33.8 V/m; Power Drift = -0.094 dB
Peak SAR (extrapolated) = 2.64 W/kg
SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.593 mW/g
Maximum value of SAR (measured) = 1.08 mW/g

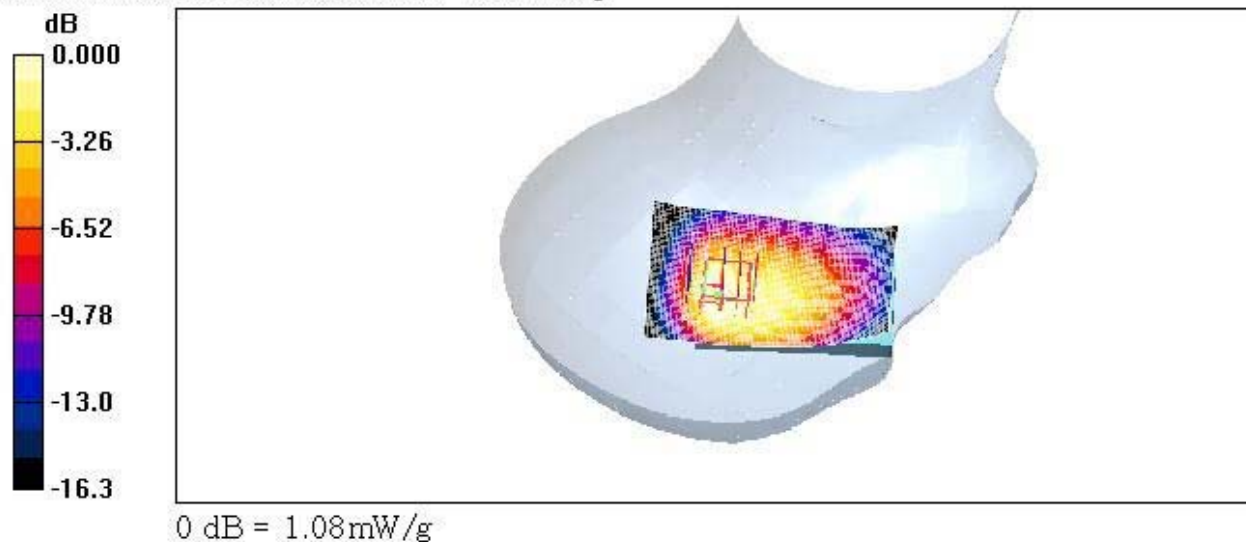

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM850 / Antenna : Fixed / Channel : 190

Liquid Temperature : 21.7 °C / Ambient Temperature: 21.9

Date Tested : July 25, 2006

DUT: EZ 700D; Type: Bar; Serial: #1

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.876$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Right tilt 190/Area Scan (51x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.54 mW/g

Right tilt 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 35.1 V/m; Power Drift = -0.069 dB

Peak SAR (extrapolated) = 2.97 W/kg

SAR(1 g) = 1.2 mW/g; SAR(10 g) = 0.671 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.25 mW/g

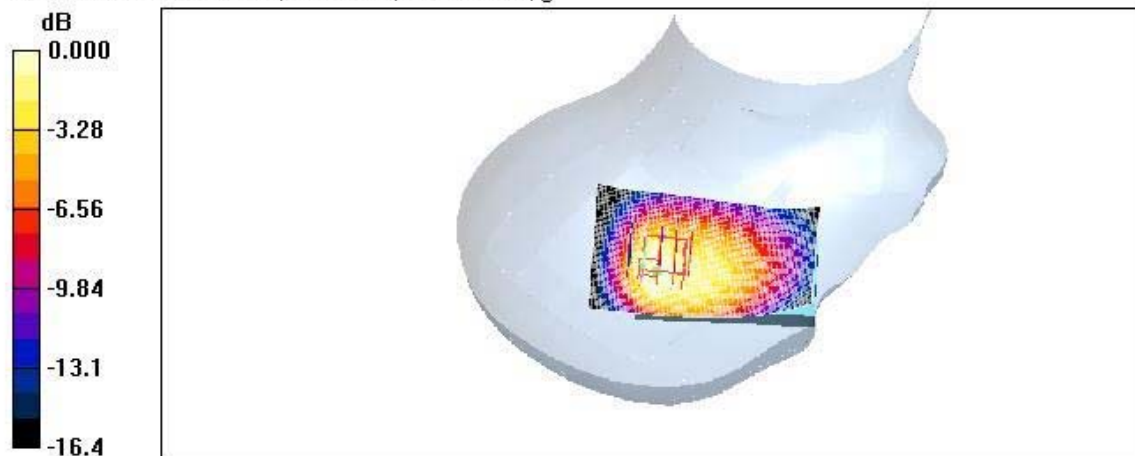

0 dB = 1.25mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM850 / Antenna : Fixed / Channel : 251

Liquid Temperature : 21.7 °C / Ambient Temperature: 21.9

Date Tested : July 25, 2006

DUT: EZ 700D; Type: Bar; Serial: #1

Communication System: GSM 850; Frequency: 849.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 850$ MHz; $\sigma = 0.888$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Right tilt 251/Area Scan (51x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 1.49 mW/g


Right tilt 251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 35.2 V/m; Power Drift = -0.144 dB

Peak SAR (extrapolated) = 2.77 W/kg

SAR(1 g) = 1.17 mW/g; SAR(10 g) = 0.676 mW/g

Maximum value of SAR (measured) = 1.21 mW/g

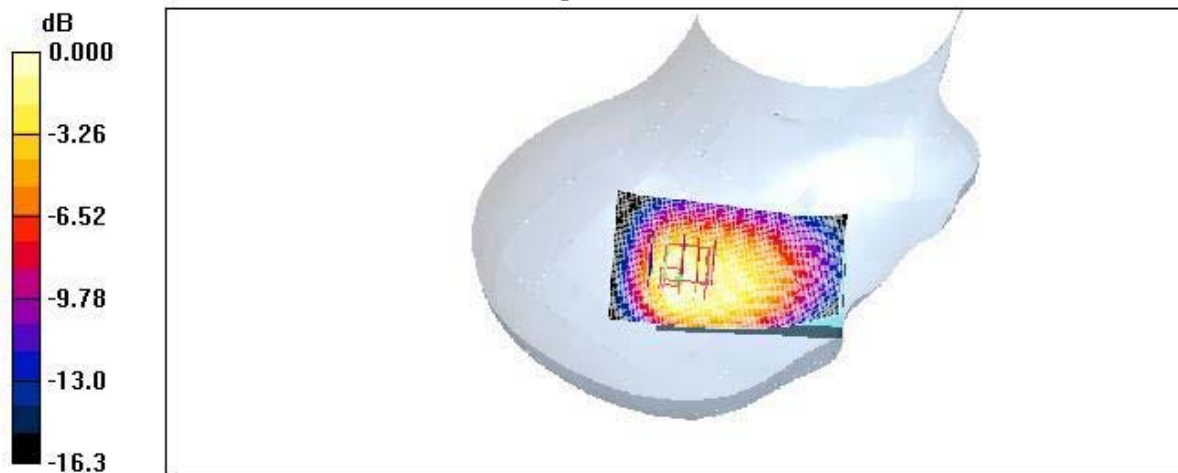

0 dB = 1.21mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM1900/Antenna : Fixed / Channel : 512

Liquid Temperature : 21.7 °C / Ambient Temperature: 21.9

Date Tested : July 25, 2006

DUT: EZ 700D; Type: Bar; Serial: #1

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 512/Area Scan (51x81x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.989 mW/g

Left touch 512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm


Reference Value = 20.6 V/m; Power Drift = -0.019 dB

Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 0.910 mW/g; SAR(10 g) = 0.482 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.936 mW/g

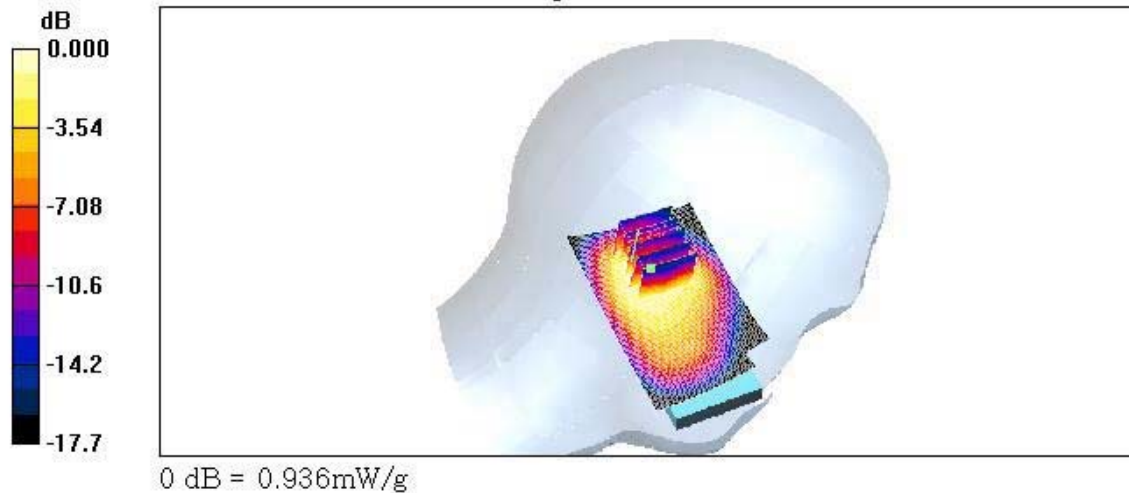

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM1900/Antenna : Fixed / Channel : 661

Liquid Temperature : 21.7 °C / Ambient Temperature: 21.9

Date Tested : July 25, 2006

DUT: EZ 700D; Type: Bar; Serial: #1

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 661/Area Scan (51x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (interpolated) = 1.05 mW/g


Left touch 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 21.4 V/m; Power Drift = -0.105 dB

Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 0.961 mW/g; SAR(10 g) = 0.505 mW/g

Maximum value of SAR (measured) = 0.991 mW/g

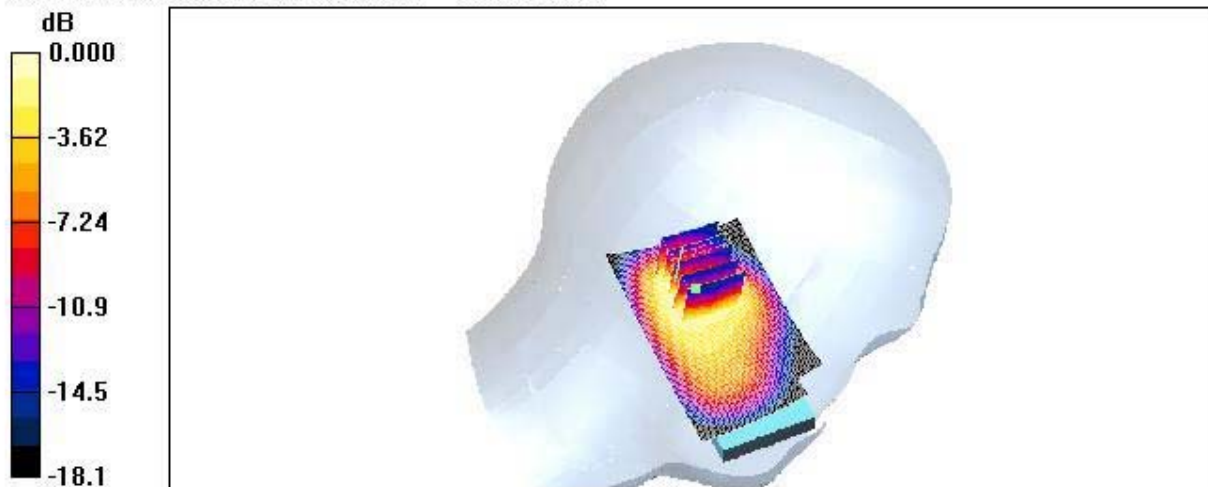

0 dB = 0.991mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM1900/ Antenna : Fixed / Channel : 810

Liquid Temperature : 21.7 °C / Ambient Temperature: 21.9

Date Tested : July 25, 2006

DUT: EZ 700D; Type: Bar; Serial: #1

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 810/Area Scan (51x81x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Maximum value of SAR (interpolated) = 1.24 mW/g


Left touch 810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm

Reference Value = 22.9 V/m; Power Drift = 0.009 dB

Peak SAR (extrapolated) = 1.86 W/kg

SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.588 mW/g

Maximum value of SAR (measured) = 1.21 mW/g

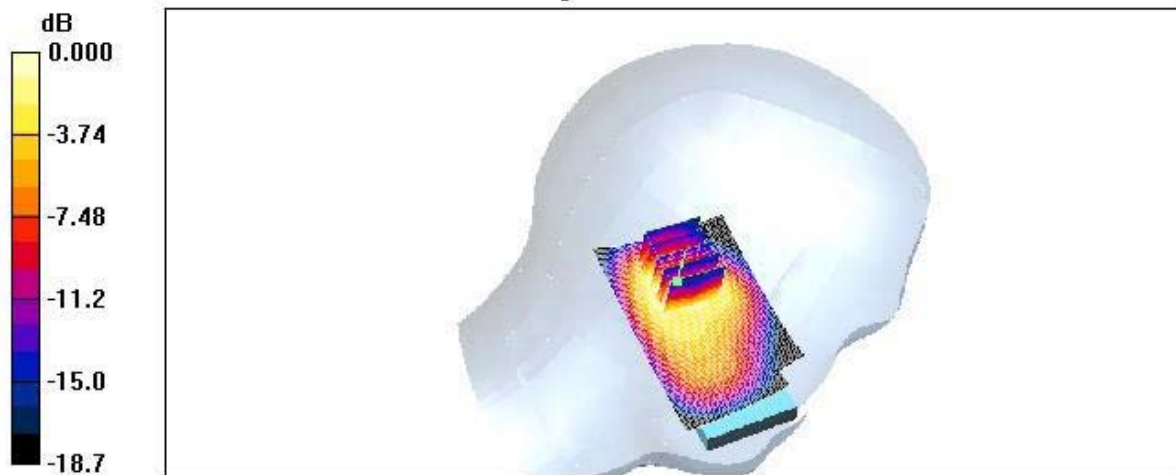

0 dB = 1.21mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM1900/Antenna : Fixed / Channel : 512

Liquid Temperature : 21.7 °C / Ambient Temperature: 21.9

Date Tested : July 25, 2006

DUT: EZ 700D; Type: Bar; Serial: #1

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 512/Area Scan (51x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.07 mW/g

Right touch 512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 21.1 V/m; Power Drift = 0.041 dB

Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.923 mW/g; SAR(10 g) = 0.489 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.05 mW/g

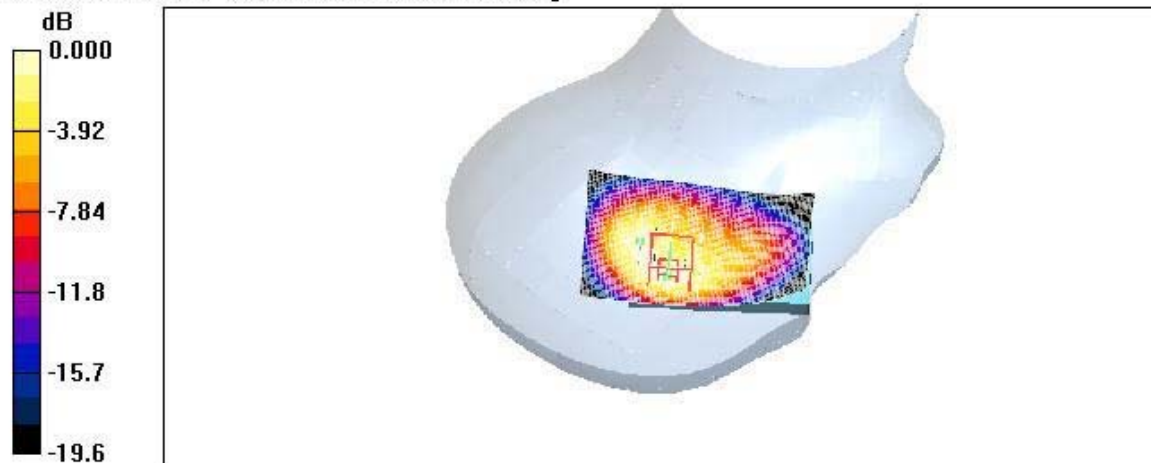

0 dB = 1.05mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM1900/ Antenna : Fixed / Channel : 661

Liquid Temperature : 21.7 °C / Ambient Temperature: 21.9

Date Tested : July 25, 2006

DUT: EZ 700D; Type: Bar; Serial: #1

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 661/Area Scan (51x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 1.13 mW/g


Right touch 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 21.7 V/m; Power Drift = 0.108 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.967 mW/g; SAR(10 g) = 0.512 mW/g

Maximum value of SAR (measured) = 1.11 mW/g

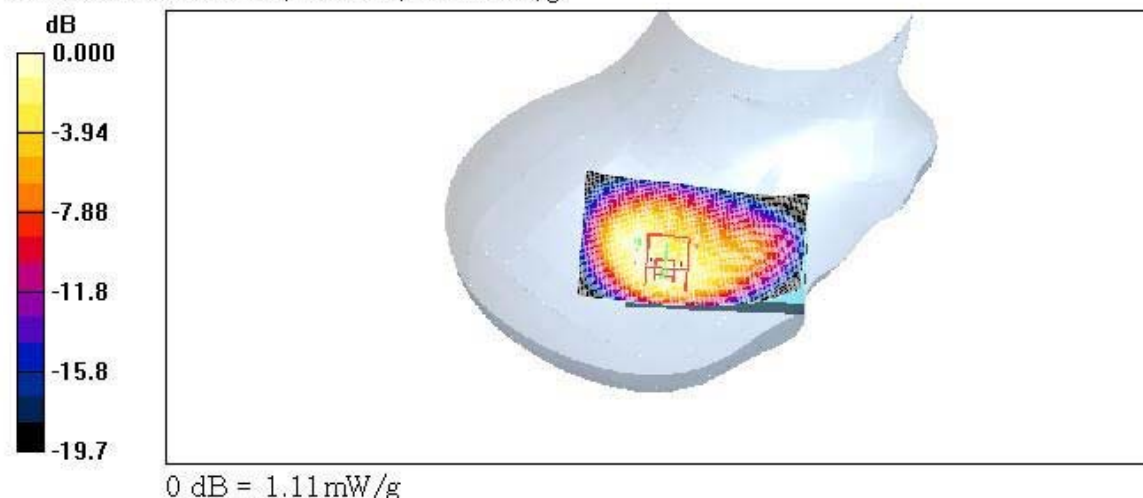

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM1900/ Antenna : Fixed / Channel : 810

Liquid Temperature : 21.7 °C / Ambient Temperature: 21.9

Date Tested : July 25, 2006

DUT: EZ 700D; Type: Bar; Serial: #1

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 810/Area Scan (51x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 1.24 mW/g


Right touch 810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 23.2 V/m; Power Drift = 0.063 dB

Peak SAR (extrapolated) = 1.91 W/kg

SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.568 mW/g

Maximum value of SAR (measured) = 1.21 mW/g

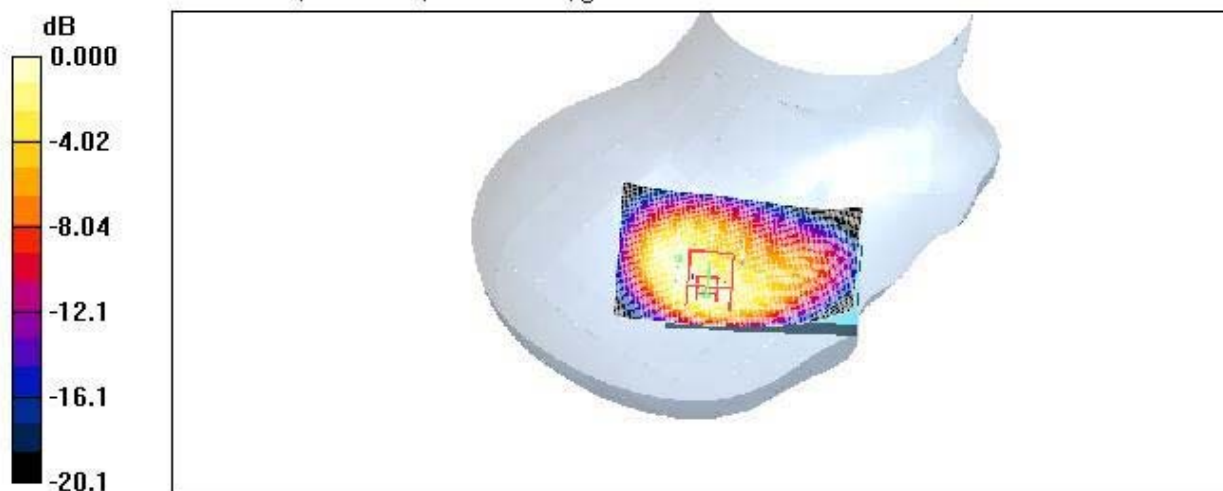

0 dB = 1.21mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM1900/ Antenna : Fixed / Channel : 512

Liquid Temperature : 21.7 °C / Ambient Temperature: 21.9

Date Tested : July 25, 2006

DUT: EZ 700D; Type: Bar; Serial: #1

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 38.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Left tilt 512/Area Scan (51x81x1): Measurement grid: $\Delta x = 15\text{mm}$, $\Delta y = 15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.00 mW/g

Left tilt 512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8\text{mm}$, $\Delta y = 8\text{mm}$, $\Delta z = 5\text{mm}$


Reference Value = 19.1 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.906 mW/g; SAR(10 g) = 0.466 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.04 mW/g

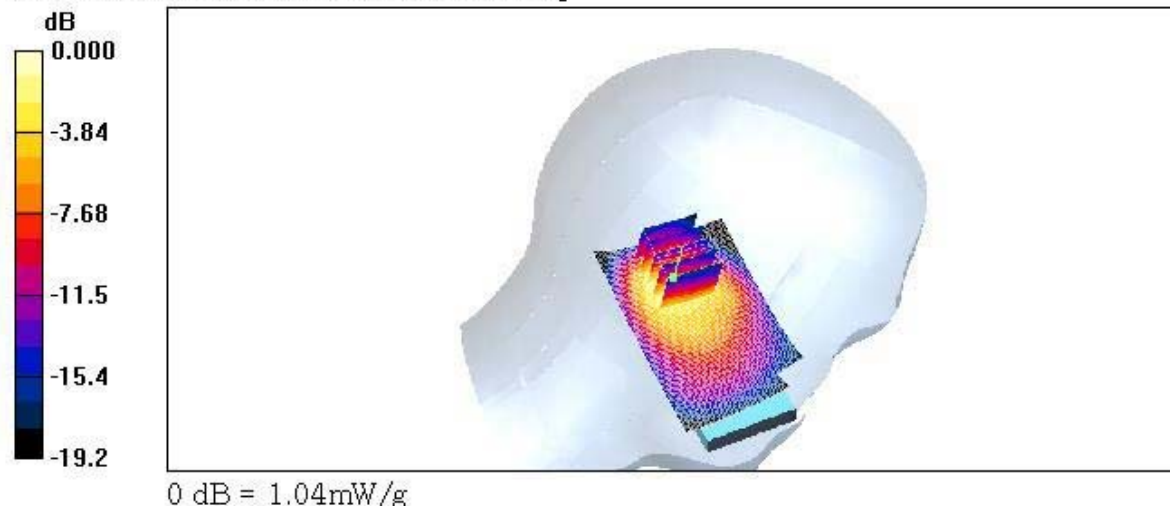

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM1900/ Antenna : Fixed / Channel : 661

Liquid Temperature : 21.7 °C / Ambient Temperature: 21.9

Date Tested : July 25, 2006

DUT: EZ 700D; Type: Bar; Serial: #1

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.44 \text{ mho/m}$; $\epsilon_r = 38.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Left tilt 661/Area Scan (51x81x1): Measurement grid: $\Delta x = 15\text{mm}$, $\Delta y = 15\text{mm}$

Maximum value of SAR (interpolated) = 1.06 mW/g


Left tilt 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8\text{mm}$, $\Delta y = 8\text{mm}$, $\Delta z = 5\text{mm}$

Reference Value = 19.1 V/m; Power Drift = 0.051 dB

Peak SAR (extrapolated) = 1.64 W/kg

SAR(1 g) = 0.964 mW/g; SAR(10 g) = 0.489 mW/g

Maximum value of SAR (measured) = 1.12 mW/g

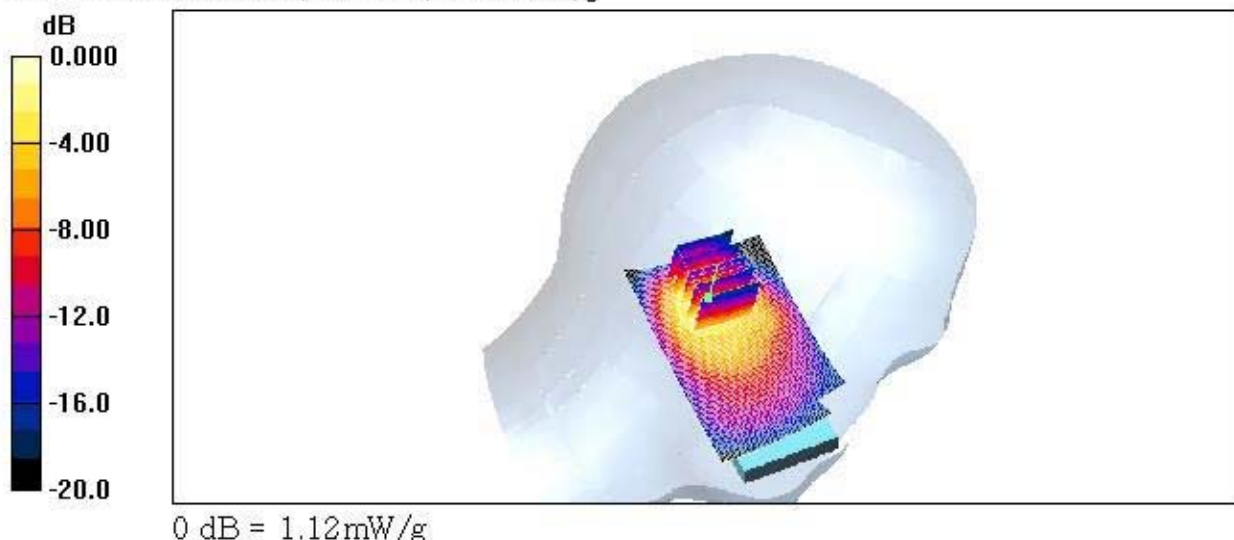

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM1900/Antenna : Fixed / Channel : 810

Liquid Temperature : 21.7 °C / Ambient Temperature: 21.9

Date Tested : July 25, 2006

DUT: EZ 700D; Type: Bar; Serial: #1

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Left tilt 810/Area Scan (51x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 1.21 mW/g


Left tilt 810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 20.5 V/m; Power Drift = 0.006 dB

Peak SAR (extrapolated) = 1.88 W/kg

SAR(1 g) = 1.1 mW/g; SAR(10 g) = 0.556 mW/g

Maximum value of SAR (measured) = 1.26 mW/g

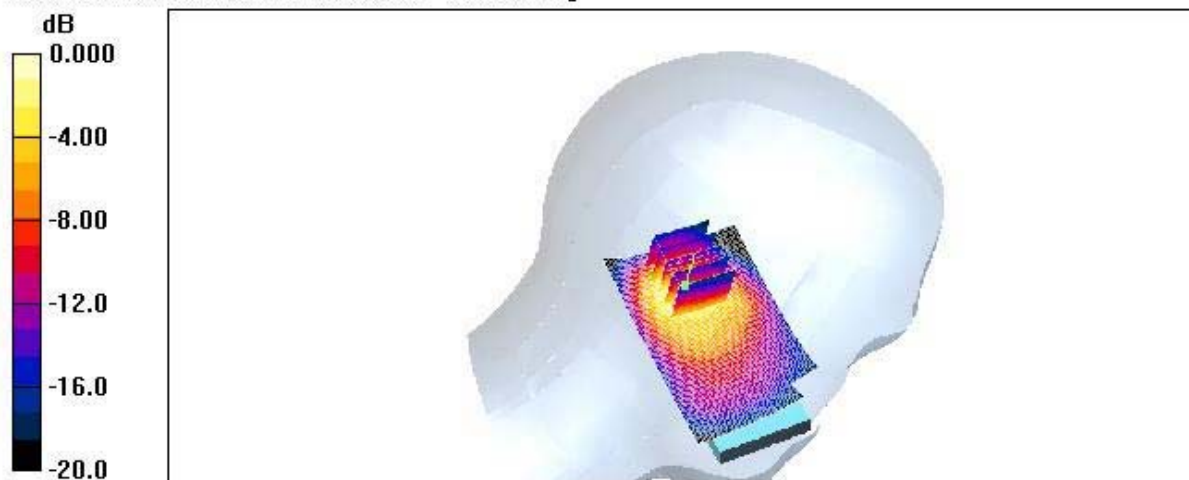

0 dB = 1.26mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM1900/Antenna : Fixed / Channel : 512

Liquid Temperature : 21.7 °C / Ambient Temperature: 21.9

Date Tested : July 25, 2006

DUT: EZ 700D; Type: Bar; Serial: #1

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAB4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Right tilt 512/Area Scan (51x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.997 mW/g

Right tilt 512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 20.6 V/m; Power Drift = 0.166 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.859 mW/g; SAR(10 g) = 0.433 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.989 mW/g

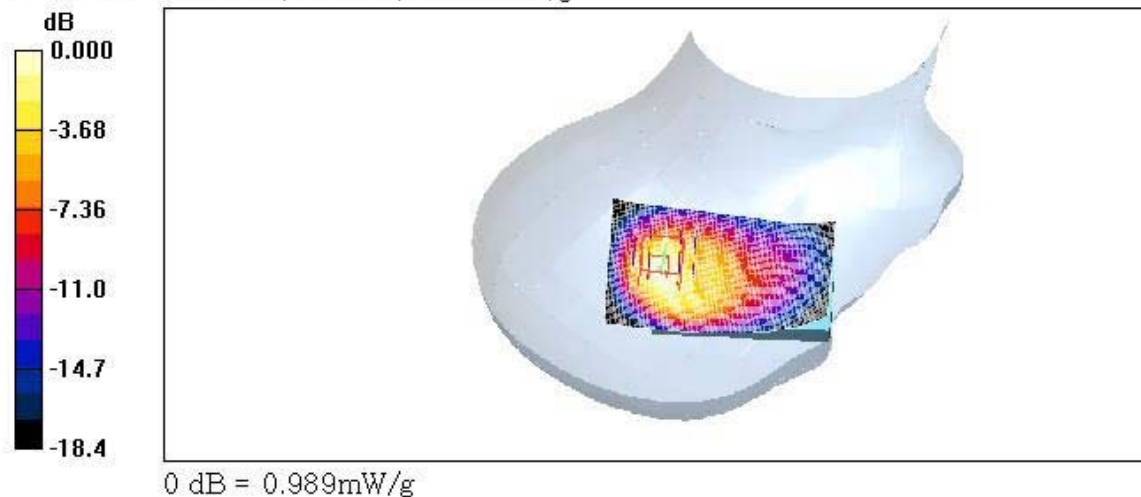

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM1900/ Antenna : Fixed / Channel : 661

Liquid Temperature : 21.7 °C / Ambient Temperature: 21.9

Date Tested : July 25, 2006

DUT: EZ 700D; Type: Bar; Serial: #1

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Right tilt 661/Area Scan (51x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 1.05 mW/g


Right tilt 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 21.3 V/m; Power Drift = 0.053 dB

Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.896 mW/g; SAR(10 g) = 0.448 mW/g

Maximum value of SAR (measured) = 1.03 mW/g

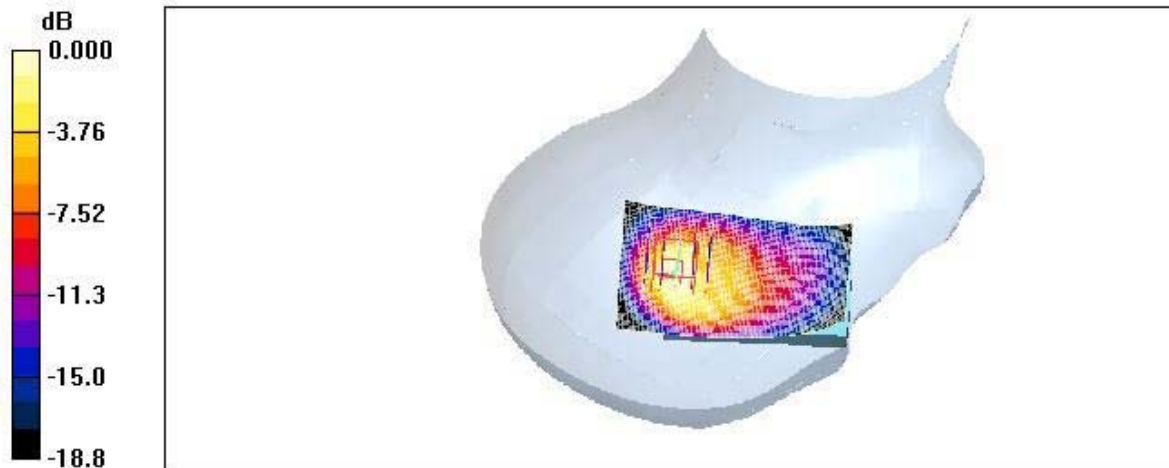

0 dB = 1.03mW/g

Test Laboratory: HCT

Company Ezze Mobile Tech., Inc.

Mode : GSM1900/ Antenna : Fixed / Channel : 810

Liquid Temperature : 21.7 °C / Ambient Temperature: 21.9

Date Tested : July 25, 2006

DUT: EZ 700D; Type: Bar; Serial: #1

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Right tilt 810/Area Scan (51x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 1.20 mW/g


Right tilt 810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 22.6 V/m; Power Drift = -0.104 dB

Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.506 mW/g

Maximum value of SAR (measured) = 1.16 mW/g

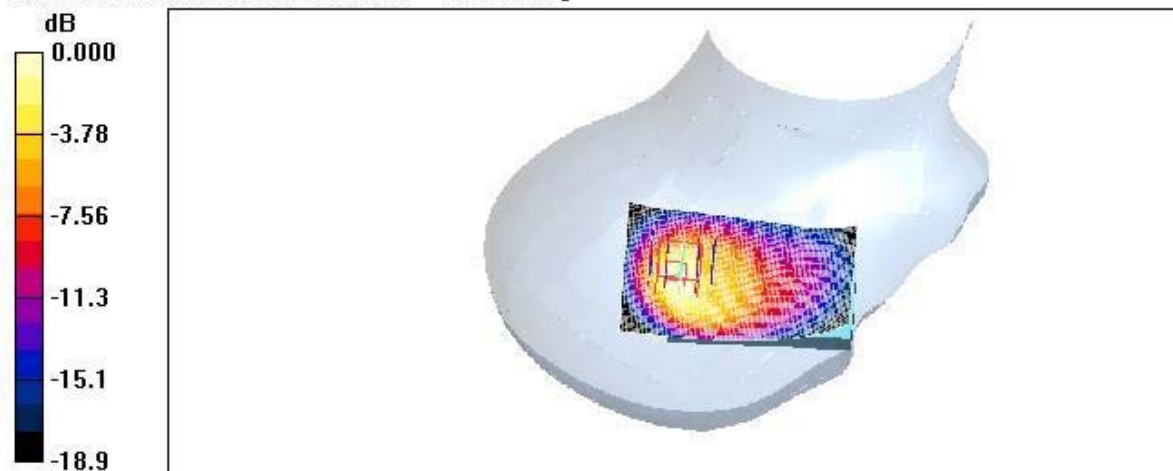

0 dB = 1.16mW/g