

Test of SP-4700-A

This covers the following Product Series:

SP-4700, SP-3800

To: FCC 47 CFR Part 15.247 & IC RSS-210

Test Report Serial No.: TRIL05-U2 Rev C



TEST REPORT  
FROM



Test of SP-4700-A  
This covers the following Product Series:  
SP-4700, SP-3800

To FCC 47 CFR Part 15.247 & IC RSS-210

Test Report Serial No.: TRIL05-U2 Rev C

Note: this report contains data with regard to the 5725 to 5850 MHz operational mode of the Trilliant Connector Wireless WAN Mesh Node. 5,250 to 5,350 and 5,470 to 5,725 MHz are reported in MiCOM Labs test report TRIL05-U4

This report supersedes: TRIL05-U2 Rev B

Applicant: Trilliant Networks, Inc  
1100 Island Drive  
Redwood City  
CA 94065

Product Function: SkyPilot by Trilliant Wireless  
WAN 5 GHz Mesh Backhaul

Copy No: pdf Issue Date: 17th May 2012

**This Test Report is Issued Under the Authority of:**

**MiCOM Labs, Inc.**  
440 Boulder Court, Suite 200  
Pleasanton, CA 94566 USA  
Phone: +1 (925) 462-0304  
Fax: +1 (925) 462-0306  
[www.micomlabs.com](http://www.micomlabs.com)



TEST CERTIFICATE #2381.01

**MiCOM Labs is an ISO 17025 Accredited Testing Laboratory**



**Title:** SP-4700-A  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** TRIL05-U2 Rev C  
**Issue Date:** 17th May 2012  
**Page:** 3 of 67

---

This page has been left intentionally blank

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## TABLE OF CONTENTS

<b>ACCREDITATION, LISTINGS &amp; RECOGNITION .....</b>	<b>5</b>
TESTING ACCREDITATION .....	5
RECOGNITION .....	6
PRODUCT CERTIFICATION .....	7
<b>1. TEST RESULT CERTIFICATE .....</b>	<b>9</b>
<b>2. REFERENCES AND MEASUREMENT UNCERTAINTY .....</b>	<b>10</b>
2.1. Normative References .....	10
2.2. Test and Uncertainty Procedures .....	11
<b>3. PRODUCT DETAILS AND TEST CONFIGURATIONS .....</b>	<b>12</b>
3.1. Technical Details .....	12
3.2. Scope of Test Program .....	13
3.3. Equipment Model(s) and Serial Number(s) .....	15
3.4. Antenna Details .....	15
3.5. Cabling and I/O Ports .....	15
3.6. Test Configurations .....	16
3.7. Equipment Modifications .....	17
3.8. Deviations from the Test Standard .....	17
3.9. Subcontracted Testing or Third Party Data .....	17
<b>4. TEST SUMMARY .....</b>	<b>18</b>
<b>5. TEST RESULTS .....</b>	<b>20</b>
5.1. Device Characteristics .....	20
5.1.1. <i>6 dB and 99 % Bandwidth</i> .....	20
5.1.2. <i>Peak Output Power</i> .....	26
5.1.3. <i>Peak Power Spectral Density</i> .....	30
5.1.4. <i>Maximum Permissible Exposure</i> .....	36
5.1.5. <i>Conducted Spurious Emissions</i> .....	37
5.1.6. <i>Radiated Emissions</i> .....	46
5.1.7. <i>ac Wireline Conducted Emissions (150 kHz – 30 MHz)</i> .....	60
<b>6. PHOTOGRAPHS .....</b>	<b>63</b>
6.1. Radiated Emissions Below 1 GHz - Test Setup .....	63
6.2. Radiated Emissions Above 1 GHz - Test Setup .....	64
6.3. ac Wireline Emissions .....	65
<b>7. TEST EQUIPMENT DETAILS .....</b>	<b>66</b>

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## ACCREDITATION, LISTINGS & RECOGNITION

### TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard EN ISO/IEC 17025. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



The American Association for Laboratory Accreditation

World Class Accreditation

### *Accredited Laboratory*

A2LA has accredited

**MICOM LABS**


*Pleasanton, CA*

for technical competence in the field of

**Electrical Testing**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 *General Requirements for the Competence of Testing and Calibration Laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Presented this 27<sup>th</sup> day of March 2012.



President & CEO  
For the Accreditation Council  
Certificate Number 2381.01  
Valid to November 30, 2013

*For the tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.*

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## **RECOGNITION**

MiCOM Labs, Inc has widely recognized Electrical testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA\*\* countries. Our test reports are widely accepted for global type approvals.

<b>Country</b>	<b>Recognition Body</b>	<b>Status</b>	<b>Phase</b>	<b>Identification No.</b>
USA	Federal Communications Commission (FCC)	TCB	-	Listing #: 102167
Canada	Industry Canada (IC)	FCB	APEC MRA 2	Listing #: 4143A-2
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	APEC MRA 2	210
	VCCI	--	--	No. 2959
Europe	European Commission	NB	EU MRA	NB 2280
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	CAB	APEC MRA 1	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	CAB	APEC MRA 1	
Singapore	Infocomm Development Authority (IDA)	CAB	APEC MRA 1	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

\*\*APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

N/A – Not Applicable

\*\*EU MRA – European Union Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the EU member countries.

\*\*NB – Notified Body

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## **PRODUCT CERTIFICATION**

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard EN ISO/IEC Guide 65. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



The American Association for Laboratory Accreditation

### *Accredited Product Certification Body*

A2LA has accredited

**MICOM LABS**

*Pleasanton, CA*

for technical competence as a

**Product Certification Body**

This product certification body is accredited in accordance with the recognized International Standard ISO/IEC Guide 65:1996 *General requirements for bodies operating product certification systems*. This accreditation demonstrates technical competence for a defined scope and the operation of a quality management system.

Presented this 27<sup>th</sup> day of March 2012.



President & CEO  
For the Accreditation Council  
Certificate Number 2381.02  
Valid to November 30, 2013

*For the product certification schemes to which this accreditation applies, please refer to the organization's Product Certification Scope of Accreditation*

**USA Telecommunication Certification Body (TCB)** - TCB Identifier – US0159

**Industry Canada Certification Body** - CAB Identifier – US0159

**European Notified Body** - Notified Body Identifier - 2280

**Japan – Recognized Certification Body (RCB)** - RCB Identifier - 210

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** SP-4700-A  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** TRIL05-U2 Rev C  
**Issue Date:** 17th May 2012  
**Page:** 8 of 67

---

## DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft		
Rev A	8 <sup>th</sup> May 2012	Initial release.
Rev B	16 <sup>th</sup> May 2012	Referenced device is for exclusive Fixed Point to Point operation in Section 5.1.2 Peak Output Power
Rev C	17 <sup>th</sup> May 2012	Correction of Typos.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** SP-4700-A  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** TRIL05-U2 Rev C  
**Issue Date:** 17th May 2012  
**Page:** 9 of 67

## 1. TEST RESULT CERTIFICATE

<b>Applicant:</b> Trilliant Networks, Inc 1100 Island Drive Redwood City CA 94065	<b>Tested By:</b> MiCOM Labs, Inc. 440 Boulder Court Suite 200 Pleasanton California, 94566, USA
<b>EUT:</b> 802.11a Wireless WAN Mesh Node	<b>Tel:</b> +1 925 462 0304
<b>Model:</b> SP-4700-A The results of testing reported in this report cover the following Product Series: SP-4700, SP-3800	<b>Fax:</b> +1 925 462 0306
<b>S/N's:</b> 106366557	
<b>Test Date(s):</b> 8th to 10th March 2012	<b>Website:</b> www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC 47 CFR Part 15.247 & IC RSS-210	EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

### Notes:


1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:



TEST CERTIFICATE #2381.01

  
\_\_\_\_\_  
Graeme Grieve  
Quality Manager MiCOM Labs,

  
\_\_\_\_\_  
Gordon Hurst  
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## 2. REFERENCES AND MEASUREMENT UNCERTAINTY

### 2.1. Normative References

REF.	PUBLICATION	YEAR	TITLE
i.	FCC 47 CFR Part 15, Subpart C	2010	Title 47: Telecommunication PART 15—RADIO FREQUENCY DEVICES Subpart C—Intentional Radiators
ii.	RSS-210 Annex 8	2010	Radio Standards Specification 210, Issue 8, Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment
iii.	FCC OET KDB 662911	4 <sup>th</sup> April 2011	Emissions Testing of Transmitters with Multiple Outputs in the Same Band
iv.	RSS-GEN	2010	Radio Standards Specification-Gen, Issue 3, General Requirements and Information for the Certification of Radiocommunication Equipment
v.	FCC 47 CFR Part 15, Subpart B	2010	47 CFR Part 15, SubPart B; Unintentional Radiators
vi.	ICES-003	2004	Spectrum Management and Telecommunications Policy Interference-Causing Equipment Standard Digital Apparatus; Issue 4
vii.	ANSI C63.4	2009	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
viii.	CISPR 22/ EN 55022	2008 2006+A1:2007	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
ix.	M 3003	Edition 1 Dec. 1997	Expression of Uncertainty and Confidence in Measurements
x.	LAB34	Edition 1 Aug 2002	The expression of uncertainty in EMC Testing
xi.	ETSI TR 100 028	2001	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
xii.	A2LA	March 2012	Reference to A2LA Accreditation Status – A2LA Advertising Policy

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** SP-4700-A  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** TRIL05-U2 Rev C  
**Issue Date:** 17th May 2012  
**Page:** 11 of 67

---

## **2.2. Test and Uncertainty Procedures**

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** SP-4700-A  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** TRIL05-U2 Rev C  
**Issue Date:** 17th May 2012  
**Page:** 12 of 67

### 3. PRODUCT DETAILS AND TEST CONFIGURATIONS

#### 3.1. Technical Details

Details	Description
Purpose:	Test of the SP-4700-A to FCC Part 15.247 and Industry Canada RSS-210 regulations.
Applicant:	Trilliant Networks, Inc 1100 Island Drive Redwood City CA 94065
Manufacturer:	Senao Networks Inc
Laboratory performing the tests:	MiCOM Labs, Inc. 440 Boulder Court, Suite 200 Pleasanton, California 94566 USA
Test report reference number:	TRIL05-U2 Rev C
Date EUT received:	8 <sup>th</sup> March 2012
Standard(s) applied:	FCC 47 CFR Part 15.247 & IC RSS-210
Dates of test (from - to):	8th to 10th March 2012
No of Units Tested:	One
Type of Equipment:	802.11a Wireless WAN Mesh Node
Product Name:	SkyPilot Connector
Model:	SP-4700-A
Hardware Release	Rev 02
Software Release	2.1
Declared Frequency Range(s):	5725 - 5850 MHz
Type of Modulation:	Per 802.11 –CCK, BPSK, QPSK, DSSS, OFDM
Declared Nominal Peak Output Power:	802.11a:Leg. +22 dBm,
EUT Modes of Operation:	Legacy 802.11a
Transmit/Receive Operation:	Half Duplex
Rated Input Voltage and Current:	POE 48 Vdc 0.6 A
Operating Temperature Range:	Declared range -20° to +60°C
ITU Emission Designator:	5725 – 5850 MHz 802.11a 16M8D1D
Equipment Dimensions:	11.0 (W) x 6.5 (H) x 4.5 (D) inches
Weight:	2.5 lbs
Primary function of equipment:	Wireless WAN Mesh Backhaul

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


### 3.2. Scope of Test Program

The scope of the test program was to test the SkyPilot by Trilliant Wireless WAN SP-4700-A Mesh Node in the frequency range of 5725 – 5850 MHz for compliance against FCC 47 CFR Part 15.247 and Industry Canada RSS-210 specifications.

#### EUT

Trilliant Inc. supplied a SkyPilot SP-4700-A device that contains an 802.11a mesh backhaul radio as being representative of operation in the 5 GHz bands for all of the SkyPilot SP-4700 and SP-3800 Series products.

#### 802.11a Wireless WAN Mesh Node

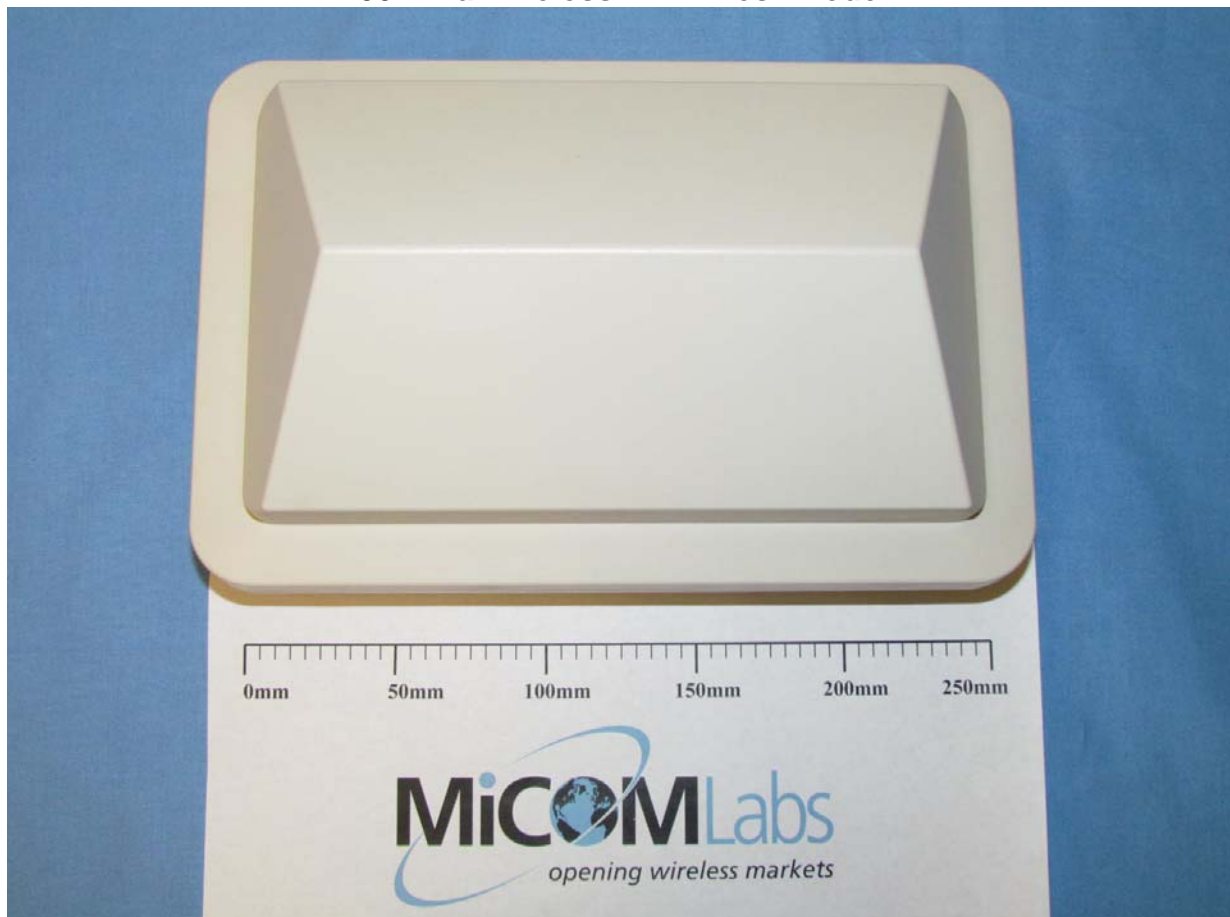

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



The customer supplied the following information about the products that are represented by the radio product.

There are no hardware differences between the 802.11a 5 GHz mesh radios. Differences between models are country specific, regulatory settings that are incorporated in the software.

Summary Table of Model Numbers
<b>Connectors</b>
SP-4700-A SP-4700-R SP-4700-xx
<b>DualBand Connectors</b>
SP-3800-W-A SP-3800-W-N SP-3800-W-E SP-3800-W-xx

### Explanation of Model Numbers

Product Name: SkyPilot by Trilliant Wireless WAN Connector Series

Model Numbers: SP-4700 Series.

The SkyPilot by Trilliant Wireless WAN Connector Series consists of the following models:

SP-4700-A, SP-4700-R, SP-4700-XX  
(where X is 0 to 9, A to Z or blank)

Product Name: SkyPilot by Trilliant Wireless WAN Connector DualBand Series

Model Numbers: SP-3800-W Series.

The SkyPilot by Trilliant Wireless WAN Connector DualBand Series consists of the following models:

SP-3800-W-A, SP-3800-W-N, SP-3800-W-E, SP-3800-W-XX  
(where X is 0 to 9, A to Z or blank)



### 3.3. Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description (Including Brand Name)	Mfr	Model No.	Serial No.
EUT	SkyPilot by Trilliant Wireless WAN	Trilliant Networks	SP-4700-A	106366557
Support	Laptop PC	IBM	Thinkpad	None

### 3.4. Antenna Details

Model	Gain (dBi)	Frequency Range (MHz)
Integral Panel	17.0	5150 - 5350
	18.5	5470 - 5725
	19.0	5725 - 5850

### 3.5. Cabling and I/O Ports

Number and type of I/O ports

1. RJ-45 10/100/1000 Ethernet & 48 Vdc POE (x1)



### 3.6. Test Configurations

Testing was performed to determine the highest power level versus bit rate. The variant with the highest power was used to exercise the product.

Operational Mode	Variant	Data Rate with Highest Power	Frequencies (MHz)
802.11a	Legacy	6 MBit/s	5,735 5,785 5,835

Results for the above configurations are provided in this report.

#### Antenna Test Configurations for Radiated Emissions

Results for the following configurations are provided in this report.

5,725 – 5850 MHz

15.247	
802.11a	a SE 5735
	a SE 5785
	a SE 5835
	BE a 5460

KEY;-

SE – Spurious Emission  
BE – Band-Edge





### **3.7. Equipment Modifications**

The following modifications were required to bring the equipment into compliance:

1. NONE

### **3.8. Deviations from the Test Standard**

The following deviations from the test standard were required in order to complete the test program:

1. NONE

### **3.9. Subcontracted Testing or Third Party Data**

1. NONE

## 4. TEST SUMMARY

### List of Measurements

The following table represents the list of measurements required under the **FCC CFR47 Part 15.247** and **Industry Canada RSS-210** and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
15.247(a)(2) A8.2(1) 4.4	6 dB and 99 % Bandwidths	≥500 kHz	Conducted	Complies	5.1.1
15.247(b)(3) 15.31(e) A8.4(4)	Peak Output Power Voltage Variation	Shall not exceed 1W  Variation of supply voltage 85 % -115 %	Conducted	Complies	5.1.2
15.247(e) A8.2	Peak Power Spectral Density	Shall not be greater than +8 dBm in any 3 kHz band	Conducted	Complies	5.1.3
15.247(i) 5.5	Maximum Permissible Exposure	Exposure to radio frequency energy levels	Conducted	Complies	5.1.4
15.247(d) 15.205 / 15.209 A8.5 2.2 4.7	Spurious Emissions (30MHz - 26 GHz b/g and 30 MHz – 40 GHz a)	The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power	Conducted	Complies	5.1.5

### List of Measurements (continued)

The following table represents the list of measurements required under the **FCC CFR47 Part 15.247**, **Industry Canada RSS-210**, and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
<b>15.247(d)</b> <b>15.205 /</b> <b>15.209</b> <b>A8.5</b> <b>2.2</b> <b>2.6</b> <b>4.7</b>	Radiated Emissions	Restricted Bands	Radiated	Complies	5.1.6
	Transmitter Radiated Spurious Emissions	Emissions above 1 GHz		Complies	5.1.6.1
	Radiated Band Edge	Band-edge results		Complies	5.1.6.2.
	Receiver Radiated Spurious Emissions	Peak Emissions Emissions above 1 GHz		Complies	5.1.6.3
Industry Canada only <b>RSS-Gen §4.10, §6</b>					
<b>15.205 /</b> <b>15.209</b> <b>2.2</b>	Radiated Spurious Emissions	Emissions <1 GHz (30M-1 GHz)	Radiated	Complies	5.1.6.4
<b>15.207</b> <b>7.2.2</b>	AC Wireline Conducted Emissions 150 kHz–30 MHz	Conducted Emissions	Conducted	Complies	5.1.7

**Note 1:** Test results reported in this document relate only to the items tested

**Note 2:** The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria

**Note 3:** Section 3.7 Equipment Modifications highlights the equipment modifications that were required to bring the product into compliance with the above test matrix

## 5. TEST RESULTS

### 5.1. Device Characteristics

#### 5.1.1. 6 dB and 99 % Bandwidth

FCC, Part 15 Subpart C §15.247(a)(2)


Industry Canada RSS-210 §A8.2

Industry Canada RSS-Gen §4.4

#### Test Procedure

The bandwidth at 6 dB and 99 % is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

#### Test Measurement Set up

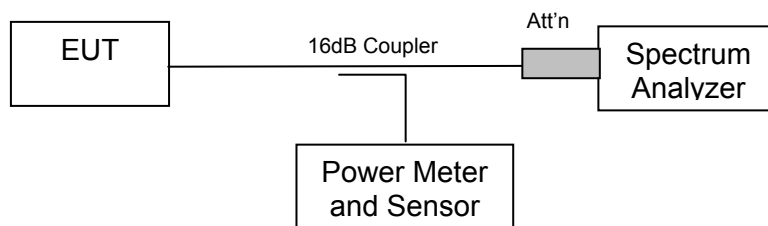

Measurement set up for 6 dB and 99 % bandwidth test

#### Measurement Results for 6 dB & 99% Bandwidth

Ambient conditions.

Temperature: 17 to 23 °C    Relative humidity: 31 to 57 %    Pressure: 999 to 1012 mbar

#### Radio Parameters

Duty Cycle: 100%

Output: Modulated Carrier

Power: Default, Maximum Power

Test s/w: ART



Measurement Results for 6 dB Operational Bandwidth(s) Ambient conditions.

Temperature: 17 to 23 °C    Relative humidity: 31 to 57 %    Pressure: 999 to 1012 mbar

**TABLE OF RESULTS – 802.11a - Legacy**

<b>Test Conditions:</b>	15.247 (a)(2)	<b>Rel. Humidity (%):</b>	35 to 42
<b>Variant:</b>	802.11a	<b>Ambient Temp. (°C):</b>	19 to 22
<b>TPC:</b>	HIGH	<b>Pressure (mBars):</b>	998 to 1003
<b>Modulation:</b>	ON	<b>Duty Cycle (%):</b>	100
<b>Beam Forming Gain (Y):</b>	N/A      dB	<b>Antenna Gain:</b>	19 dBi
<b>Applied Voltage:</b>	48.00      Vdc		
<b>Notes 1:</b>			
<b>Notes 2:</b>			

**6 dB Bandwidth**

Test Frequency	6 dB Bandwidth				Minimum 6dB Bandwidth Limit		Margin
	MHz				kHz	MHz	
MHz	a	b	c	d			
5735.000	16.433000	--	--	--	500	0.5	-15.933000
5785.000	16.433000	--	--	--			-15.933000
5835.000	16.433000	--	--	--			-15.933000

**99% Bandwidth**

Test Frequency	99 % Bandwidth						
	MHz						
MHz	a	b	c	d			
5735.000	16.673000	--	--	--			
5785.000	16.754000	--	--	--			
5835.000	16.593000	--	--	--			

<b>Measurement uncertainty:</b>	±2.81 dB
---------------------------------	----------


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**PORT A 5,735 MHz 802.11a Legacy 6 dB and 99% Bandwidth**



Delta 1 [T1] RBW 100 kHz RF Att 20 dB  
 Ref Lvl 3.04 dB VBW 300 kHz  
 25 dBm 16.43286573 MHz SWT 20 s Unit dBm

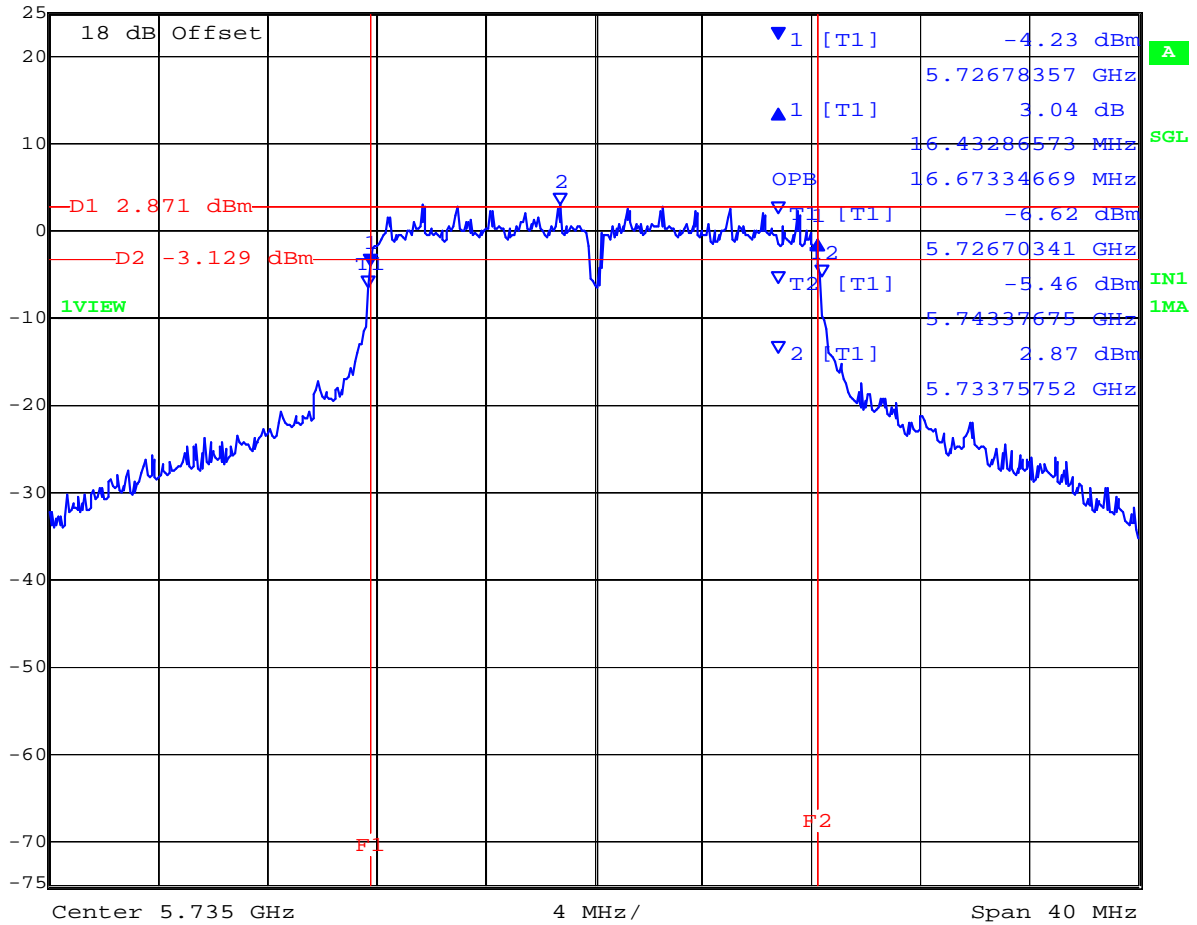


Date: 8.MAR.2012 11:49:31

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**PORT A 5,785 MHz 802.11a Legacy 6 dB and 99% Bandwidth**

Delta 1 [T1] RBW 100 kHz RF Att 20 dB  
 Ref Lvl 25 dBm 2.33 dB VBW 300 kHz  
 16.43286573 MHz SWT 20 s Unit dBm

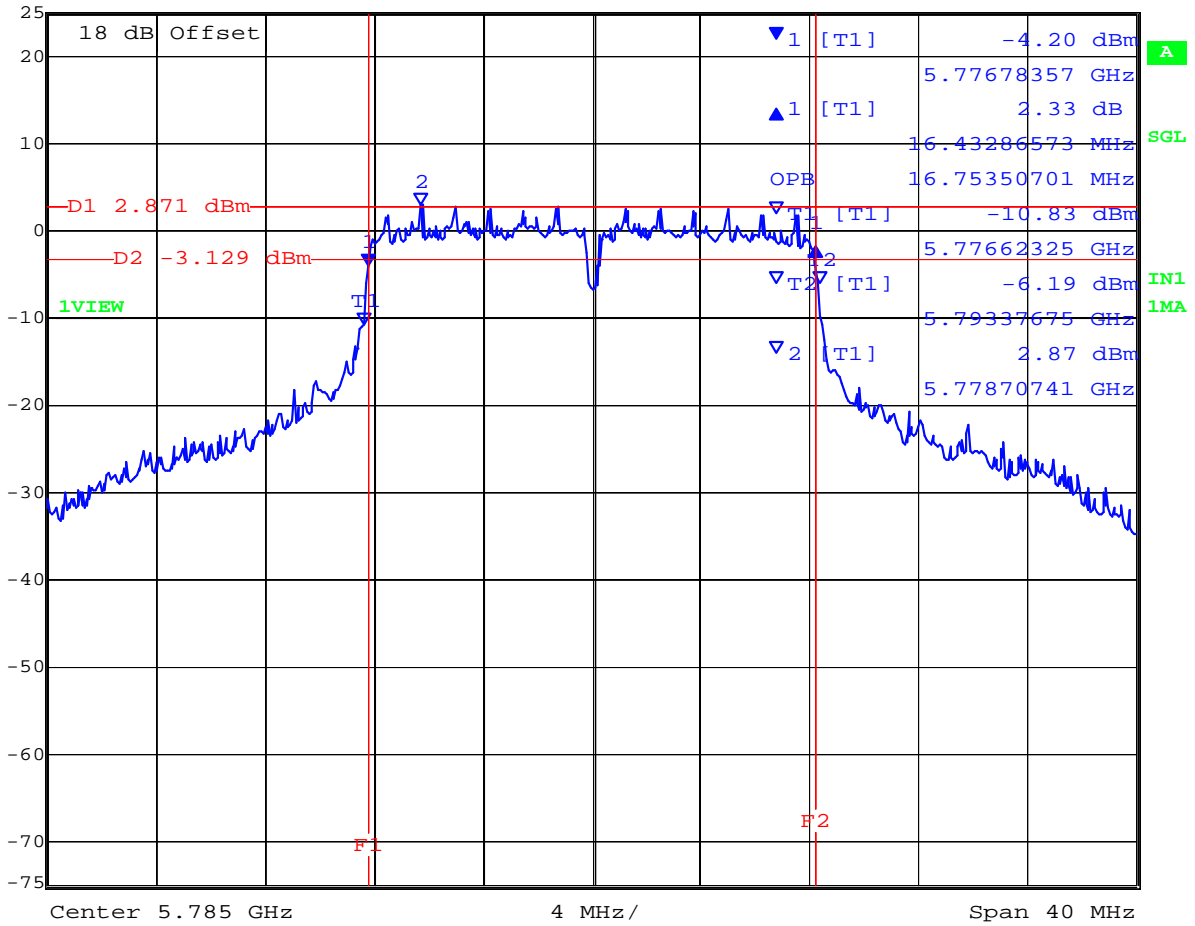


Date: 8.MAR.2012 12:04:25

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**PORT A 5,835 MHz 802.11a Legacy 6 dB and 99% Bandwidth**

Delta 1 [T1] RBW 100 kHz RF Att 20 dB  
 Ref Lvl 2.23 dB VBW 300 kHz  
 25 dBm 16.43286573 MHz SWT 20 s Unit dBm

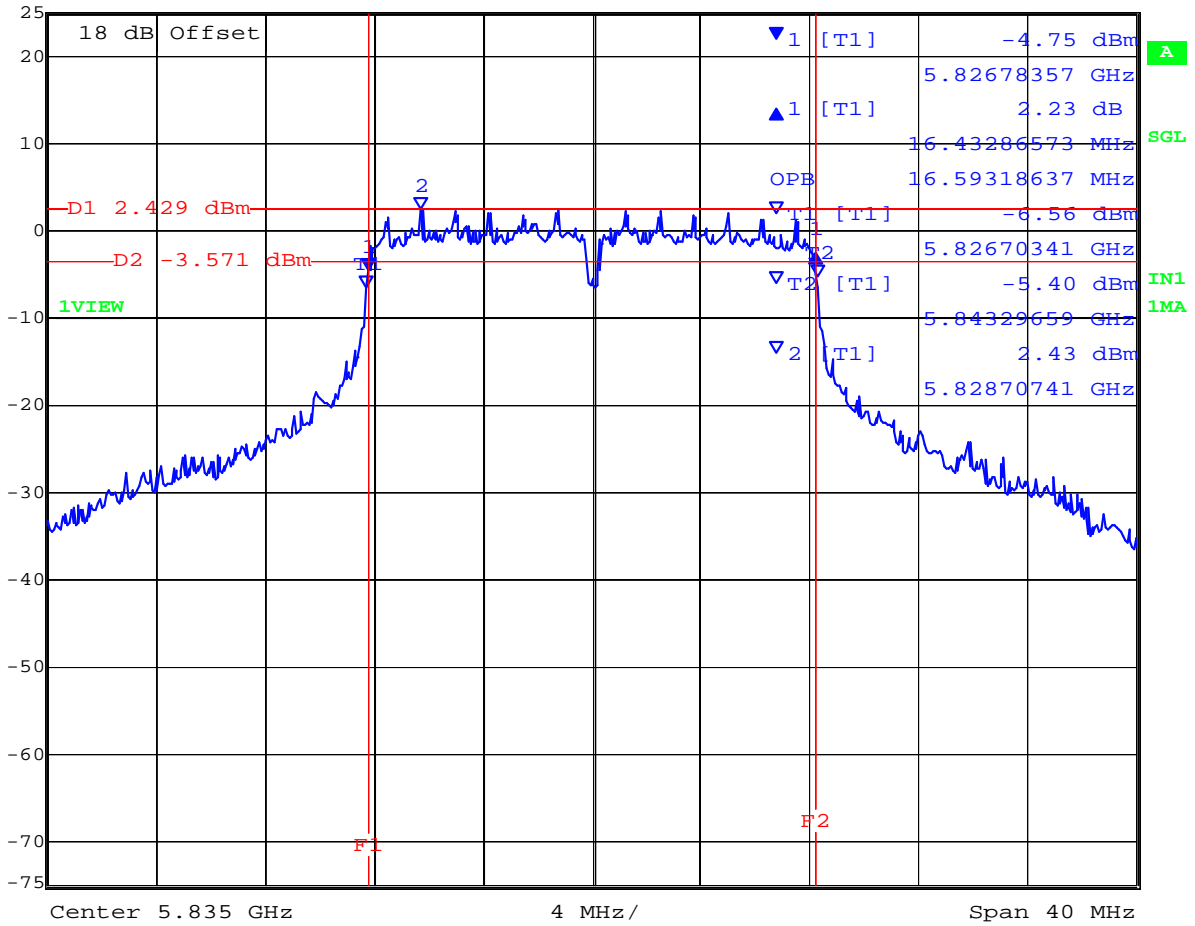

Date: 8.MAR.2012 12:17:33

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





## Specification

### Limits

**§15.247 (a)(2) & RSS-210 §A8.2(1)**

The minimum 6 dB bandwidth shall be at least 500 kHz.

**§ IC RSS-Gen 4.4.1 Occupied Bandwidth** When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

**§ IC RSS-Gen 4.4.2 6 dB Bandwidth** Where indicated, the 6 dB bandwidth is measured at the points when the spectral density of the signal is 6 dB down from the in-band spectral density of the modulated signal, with the transmitter modulated by a representative signal.

## Laboratory Measurement Uncertainty for Spectrum Measurement

Measurement uncertainty	±2.81 dB
-------------------------	----------

## Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of RF Spectrum Mask'	0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


### 5.1.2. Peak Output Power

**FCC, Part 15 Subpart C §15.247(b)(3), §15.31(e)**  
**Industry Canada RSS-210 §A8.4(4)**

#### Test Procedure

The transmitter terminal of EUT was connected to the input of the spectrum analyzer set to measure peak power. The resolution filter bandwidth was set to 6 dB, peak detector selected and the analyzer built-in power function was used to measure peak power over the 99 % bandwidth.

#### Test Measurement Set up

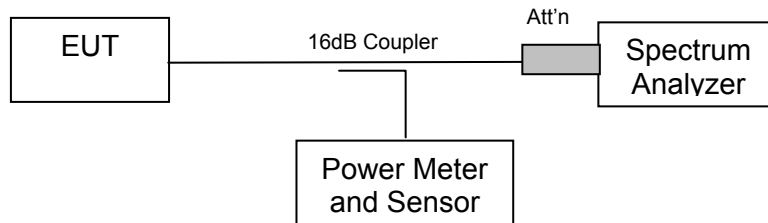

Measurement set up for Transmitter Peak Output Power

Ambient conditions.

Temperature: 17 to 23 °C    Relative humidity: 31 to 57 %    Pressure: 999 to 1012 mbar

Radio Parameters

Duty Cycle: 100%

Output: Modulated Carrier

Power: Maximum Default Power

Calculated Power = A + G + 10 log (1/x) dBm

A = Total Power [10 Log<sub>10</sub> (10<sup>a/10</sup> + 10<sup>b/10</sup>)], G = Antenna Gain,

x = Duty Cycle



**TABLE OF RESULTS – 802.11a – Legacy**  
 Maximum Conducted Power

<b>Test Conditions:</b>	15.247 (b)	<b>Rel. Humidity (%):</b>	35	to	42
<b>Variant:</b>	802.11a	<b>Ambient Temp. (°C):</b>	19	to	22
<b>TPC:</b>	HIGH	<b>Pressure (mBars):</b>	998	to	1003
<b>Modulation:</b>	ON	<b>Duty Cycle (%):</b>	100		
<b>Beam Forming Gain (Y):</b>	N/A dB	<b>Antenna Gain:</b>	19 dBi		
<b>Applied Voltage:</b>	48.00 Vdc				
<b>Notes 1:</b>					
<b>Notes 2:</b>					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)				Combined	Calculated		
MHz	a	b	c	d			dBm	dB
5735	21.83	--	--	--	N/A	21.83	30.00	-8.17
5785	21.70	--	--	--	N/A	21.70	30.00	-8.30
5835	21.49	--	--	--	N/A	21.49	30.00	-8.51

<b>Measurement uncertainty:</b>	±1.33 dB
---------------------------------	----------

**Fixed Point-Point Operation**

Antenna	Gain (dBi)	Max. Allowable Conducted Peak Power (dBm)	Max. Peak Power (dBm)	Maximum EIRP 19 dBi Antenna (dBm)
Integral Panel	19.0	+30.0	+21.83	+40.83

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## Specification

### Limits

**§15.247 (b)** The maximum peak output power of the intentional radiator shall not exceed the following:

**§15.247 (b) (3)** For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands: 1.0 watt.

**15.247 (b) (4)** The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

15.247 (c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:

(i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(ii) Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

**§15.31 (e)** For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

**§ RSS-210 A8.4(4)** For systems employing digital modulation techniques operating in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands the maximum peak conducted power shall not exceed 1 watt.



**Title:** SP-4700-A  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** TRIL05-U2 Rev C  
**Issue Date:** 17th May 2012  
**Page:** 29 of 67

---

**Laboratory Measurement Uncertainty for Power Measurements**

Measurement uncertainty	$\pm 1.33$ dB
-------------------------	---------------

**Traceability**

Method	Test Equipment Used
Measurements were made per work instruction WI-01 'Measuring RF Output Power'	0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


### 5.1.3. Peak Power Spectral Density

**FCC, Part 15 Subpart C §15.247(e)**  
**Industry Canada RSS-210 §A8.2**

#### Test Procedure

The transmitter output was connected to a spectrum analyzer and the maximum level in a 3 kHz bandwidth was measured. A peak value was found over the full emission bandwidth and the frequency span reduced to obtain enhanced resolution. Sweep time  $\geq$  span / 3 kHz with video averaging turned off. The Peak Power Spectral Density is the highest level found across the emission in a 3 kHz resolution bandwidth.

#### Test Measurement Set up

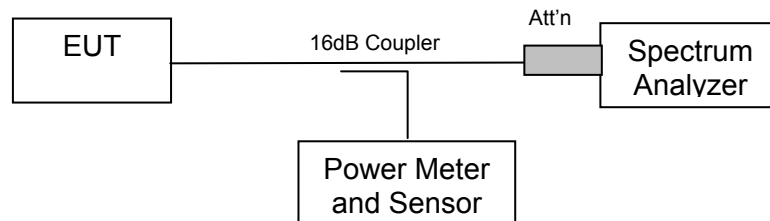

Measurement set up for Peak Power Spectral Density

#### Measurement Results for Peak Power Spectral Density

Ambient conditions.

Temperature: 17 to 23 °C    Relative humidity: 31 to 57 %    Pressure: 999 to 1012 mbar

#### Radio Parameters

Duty Cycle: 100%

Output: Modulated Carrier

Power: Maximum Default Power



**Peak Power Spectral Density**

**TABLE OF RESULTS – 802.11a Legacy**

<b>Test Conditions:</b>	15.247 (e)	<b>Rel. Humidity (%):</b>	35	to	42
<b>Variant:</b>	802.11a	<b>Ambient Temp. (°C):</b>	19	to	22
<b>TPC:</b>	HIGH	<b>Pressure (mBars):</b>	998	to	1003
<b>Modulation:</b>	ON	<b>Duty Cycle (%):</b>	100		
<b>Beam Forming Gain (Y):</b>	N/A dB	<b>Antenna Gain:</b>	19 dBi		
<b>Applied Voltage:</b>	48.00 Vdc	<b>Antenna Ports (N):</b>	1		
<b>Notes 1:</b>					
<b>Notes 2:</b>					


Test Frequency	Measured Power Density				Correction factor	Peak Power Spectral Density	Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	10Log(N)	dBm	dBm	dB
5735.000	-11.58	--	--	--	0.00	-11.58	8.00	-19.58
5785.000	-11.57	--	--	--	0.00	-11.57	8.00	-19.57
5835.000	-11.86	--	--	--	0.00	-11.86	8.00	-19.86

<b>Measurement uncertainty:</b>	± 1.33 dB
---------------------------------	-----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### PORT A 5,735 MHz 802.11a Legacy - Peak Power Spectral Density

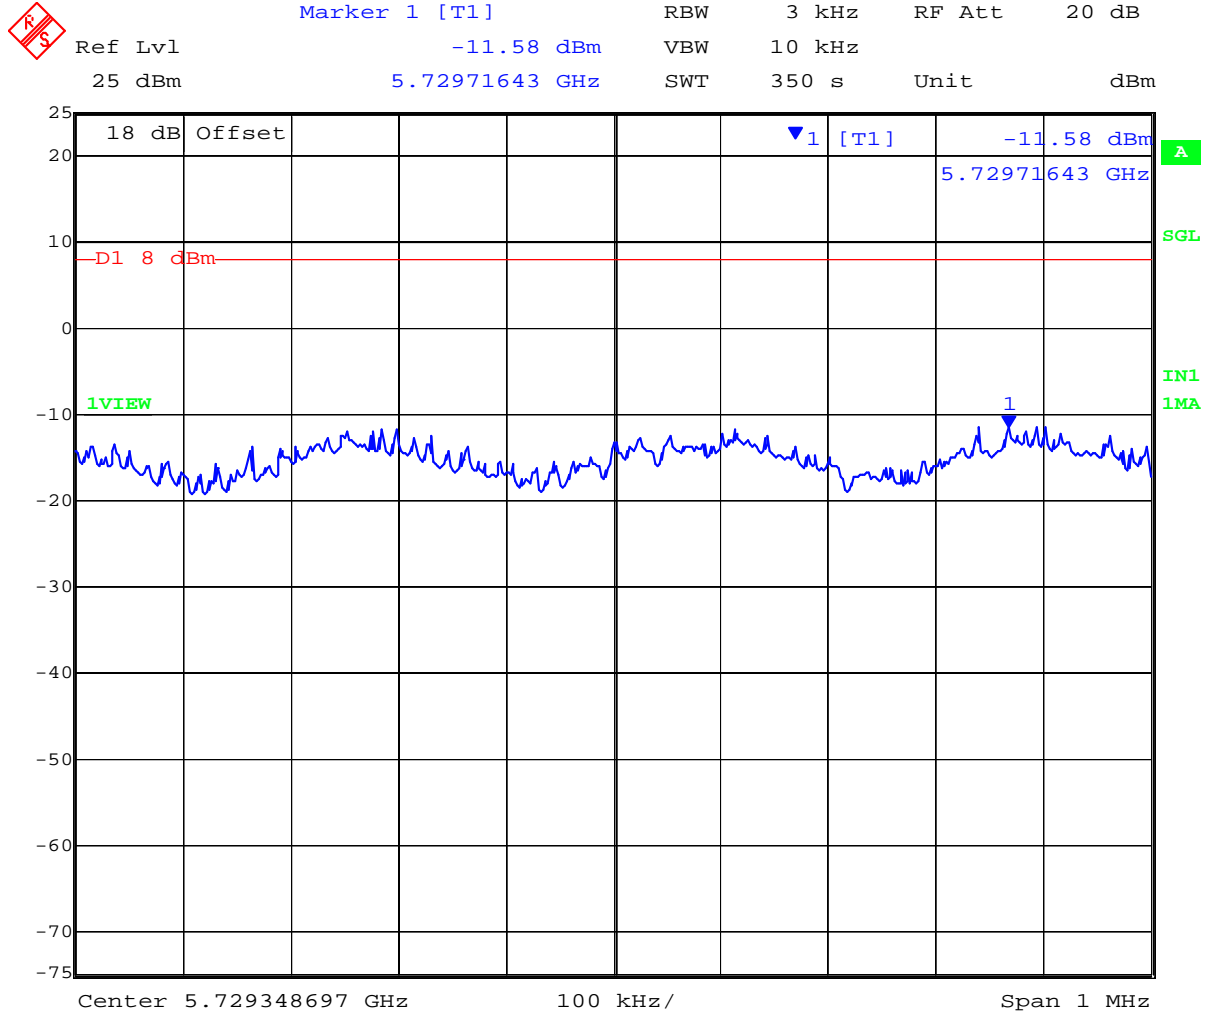


Date: 8.MAR.2012 11:57:23

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





### PORT A 5,785 MHz 802.11a Legacy - Peak Power Spectral Density

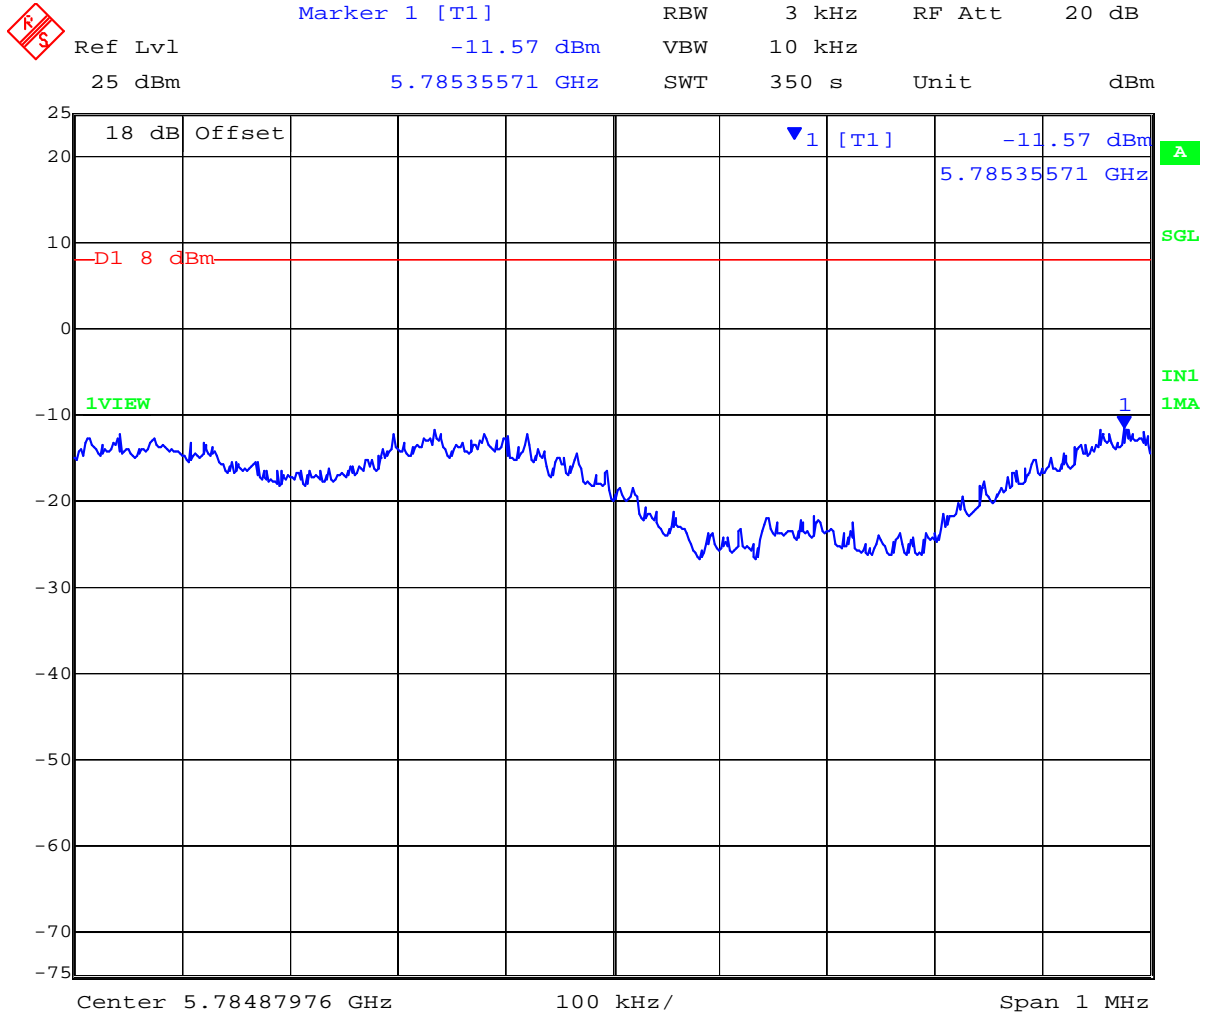

Date: 8.MAR.2012 12:10:58

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Specification**  
**Peak Power Spectral Density Limits**

**§15.247(e)** For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission

**RSS-210 §A8.2(2)** The transmitter power spectral density (into the antenna) shall not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission or over 1.0 second if the transmission exceeds 1.0 second duration.

**Laboratory Measurement Uncertainty for Spectral Density**

Measurement uncertainty	±1.33 dB
-------------------------	----------

**Traceability**

Method	Test Equipment Used
Measurements were made per work instruction WI-01 'Measuring RF Output Power'	0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117

#### 5.1.4. Maximum Permissible Exposure

**FCC, Part 15 Subpart C §15.247(i)**

**Industry Canada RSS-Gen §5.5**

#### Calculations for Maximum Permissible Exposure Levels

$$\text{Power Density} = P_d \text{ (mW/cm}^2\text{)} = \text{EIRP}/(4\pi d^2)$$

$$\text{EIRP} = P * G$$

P = Peak output power (mW)

G = Antenna numeric gain (numeric)

d = Separation distance (cm)

$$\text{Numeric Gain} = 10^{(G \text{ (dBi)}/10)}$$

The Trilliant CONNECTOR has a single integral antenna.

Because the EUT belongs to the General Population/Uncontrolled Exposure the limit of power density is 1.0 mW/cm<sup>2</sup>

Freq. Band (GHz)	Antenna Gain (dBi)	Numeric Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Calculated Safe Distance @ 1mW/cm <sup>2</sup> Limit(cm)	Minimum Separation Distance (cm)
5.8	19.0	79.5	+21.83	152.4	31.0	20.0*

\*Note: for mobile or fixed location transmitters the minimum separation distance is 20cm, even if calculations indicate the MPE distance to be less.

#### Specification

#### Maximum Permissible Exposure Limits

**§15.247(i)** Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency levels in excess of the Commission's guidelines.

**FCC §1.1310** Limit = 1mW / cm<sup>2</sup> from 1.310 Table 1

**RSS-Gen §5.5** Before equipment certification is granted, the applicable requirements of RSS-102 shall be met

#### Laboratory Measurement Uncertainty for Power Measurements

Measurement uncertainty	±1.33 dB
-------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


### 5.1.5. Conducted Spurious Emissions

**FCC, Part 15 Subpart C §15.247(d); 15.205; 15.209**  
**Industry Canada RSS-210 §A8.5, §2.2**  
**Industry Canada RSS-Gen 4.7**

#### **Test Procedure**

Conducted emissions were measured at a limit of 20 dB below the highest in-band spectral density measured with a spectrum analyzer connected to the antenna terminal. Emissions at the band edge were measured and recorded. Measurements were made while EUT was operating in transmit mode of operation at the appropriate center frequency.

#### **Test Measurement Set up**

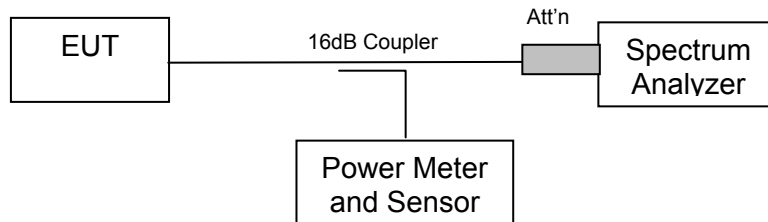

Band-edge measurement test configuration

#### **Measurement Results of Conducted Spurious Emissions**

Ambient conditions.

Temperature: 17 to 23 °C    Relative humidity: 31 to 57 %    Pressure: 999 to 1012 mbar

Radio Parameters

Duty Cycle: 100%

Output: Modulated Carrier

Power: Maximum Default Power



**Title:** SP-4700-A  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** TRIL05-U2 Rev C  
**Issue Date:** 17th May 2012  
**Page:** 38 of 67

---

### **Conducted Spurious Emission Results**

Measurements were performed with the transmitter tuned to the channel closest to the band-edge being measured. All emissions were maximized during measurement. Limits which were derived from the band-edge measurements provided below are drawn on each plot.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Conducted Spurious Emission Results**

TABLE OF RESULTS – 802.11a Legacy

<b>Test Conditions:</b>	15.247 (a)(2)	<b>Rel. Humidity (%):</b>	35	to	42
<b>Variant:</b>	802.11a	<b>Ambient Temp. (°C):</b>	19	to	22
<b>TPC:</b>	HIGH	<b>Pressure (mBars):</b>	998	to	1003
<b>Modulation:</b>	ON	<b>Duty Cycle (%):</b>	100		
<b>Beam Forming Gain</b>	N/A dB	<b>Antenna Gain:</b>	N/A		dBi
<b>Applied Voltage:</b>	48.00 Vdc	<b>Antenna Ports (N):</b>			
<b>Notes 1:</b>					
<b>Notes 2:</b>					

**Conducted Spurious Measurement**

Test Freq.	Start Freq.	Stop Freq.	Port A		Port B		Port C		Port D	
			SE dBm	Limit dBm	SE dBm	Limit dBm	SE dBm	Limit dBm	SE dBm	Limit dBm
5735.000	30.00	26000.00	-41.96	-17.52						
5785.000	30.00	26000.00	-41.61	-17.48						
5835.000	30.00	26000.00	-41.36	-18.79						

SE: Maximum spurious emission found

**Band-edge Measurement**

Test Freq.	Band-edge freq.	Port A		Port B		Port C		Port D	
		BE dBm	Limit dBm	BE dBm	Limit dBm	BE dBm	Limit dBm	BE dBm	Limit dBm
5735.000	5725.00	-17.21	-16.97						
5835.000	5850.00	-26.90	-17.46						

BE: Maximum Band edge emission found


<b>Measurement uncertainty:</b>	±2.81 dB
---------------------------------	----------


Note: Limit is based on 20dB down from fundamental emissions

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### PORT A 802.11a Legacy - Conducted Spurious Emissions 5735 MHz

 Marker 1 [T1] RBW 100 kHz RF Att 20 dB  
Ref Lvl 25 dBm 2.48 dBm VBW 300 kHz  
25 dBm 5.70280561 GHz SWT 60 s Unit dBm

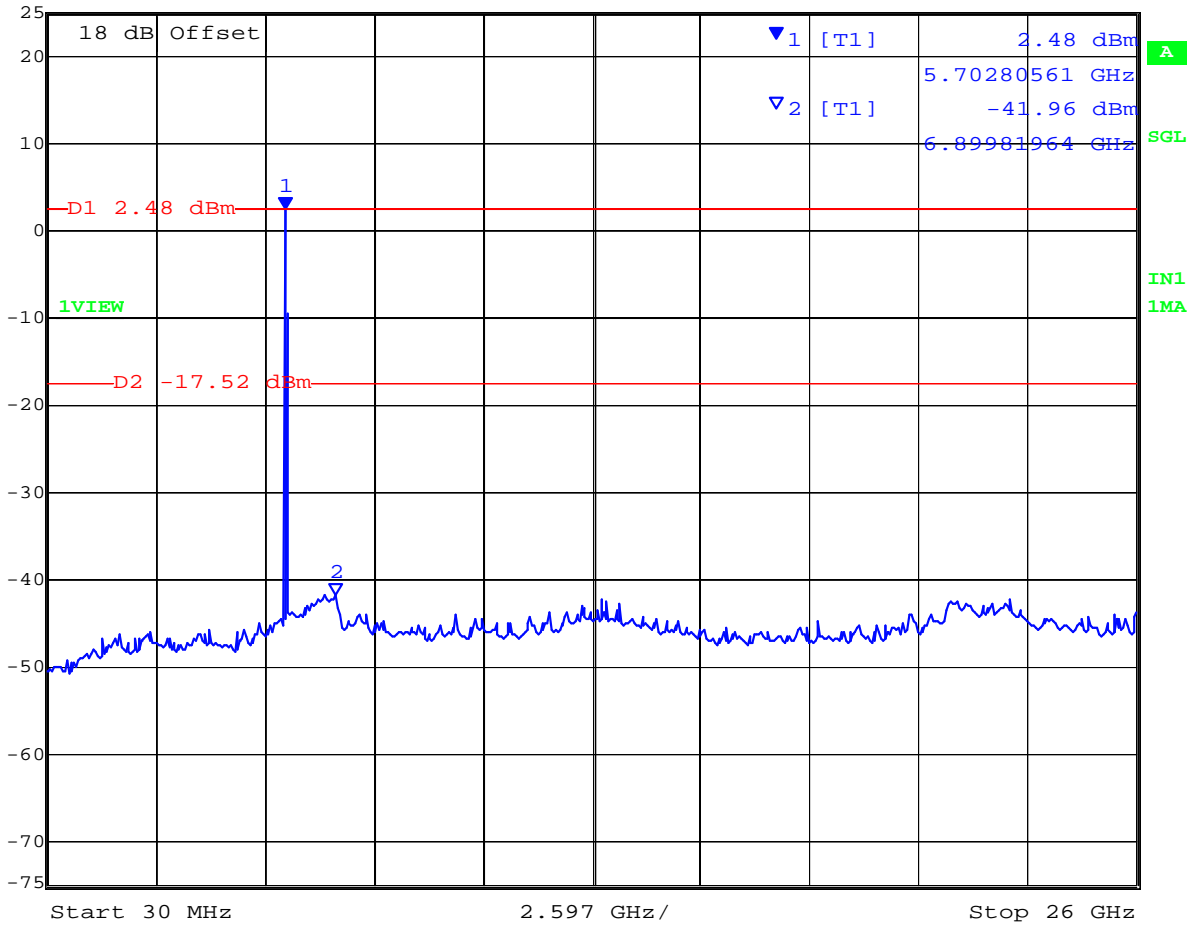

Date: 8.MAR.2012 11:59:22

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.






### PORT A 802.11a Legacy - Conducted Spurious Emissions 5785 MHz



Marker 1 [T1] RBW 100 kHz RF Att 20 dB  
Ref Lvl 2.52 dBm VBW 300 kHz  
25 dBm 5.75484970 GHz SWT 60 s Unit dBm

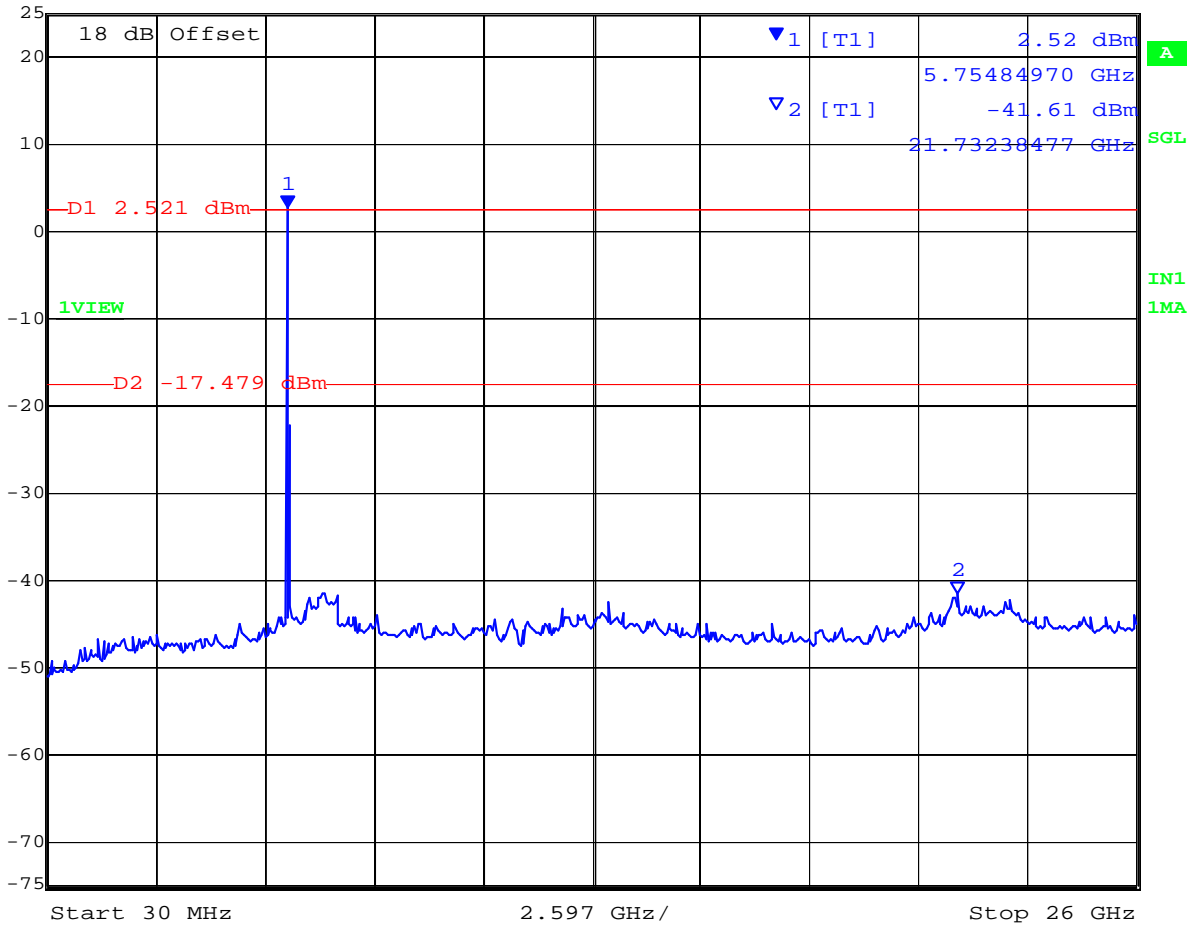

Date: 8.MAR.2012 12:12:56


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### PORT A 802.11a Legacy - Conducted Spurious Emissions 5835 MHz



Marker 1 [T1] RBW 100 kHz RF Att 20 dB  
Ref Lvl 1.21 dBm VBW 300 kHz  
25 dBm 5.80689379 GHz SWT 60 s Unit dBm

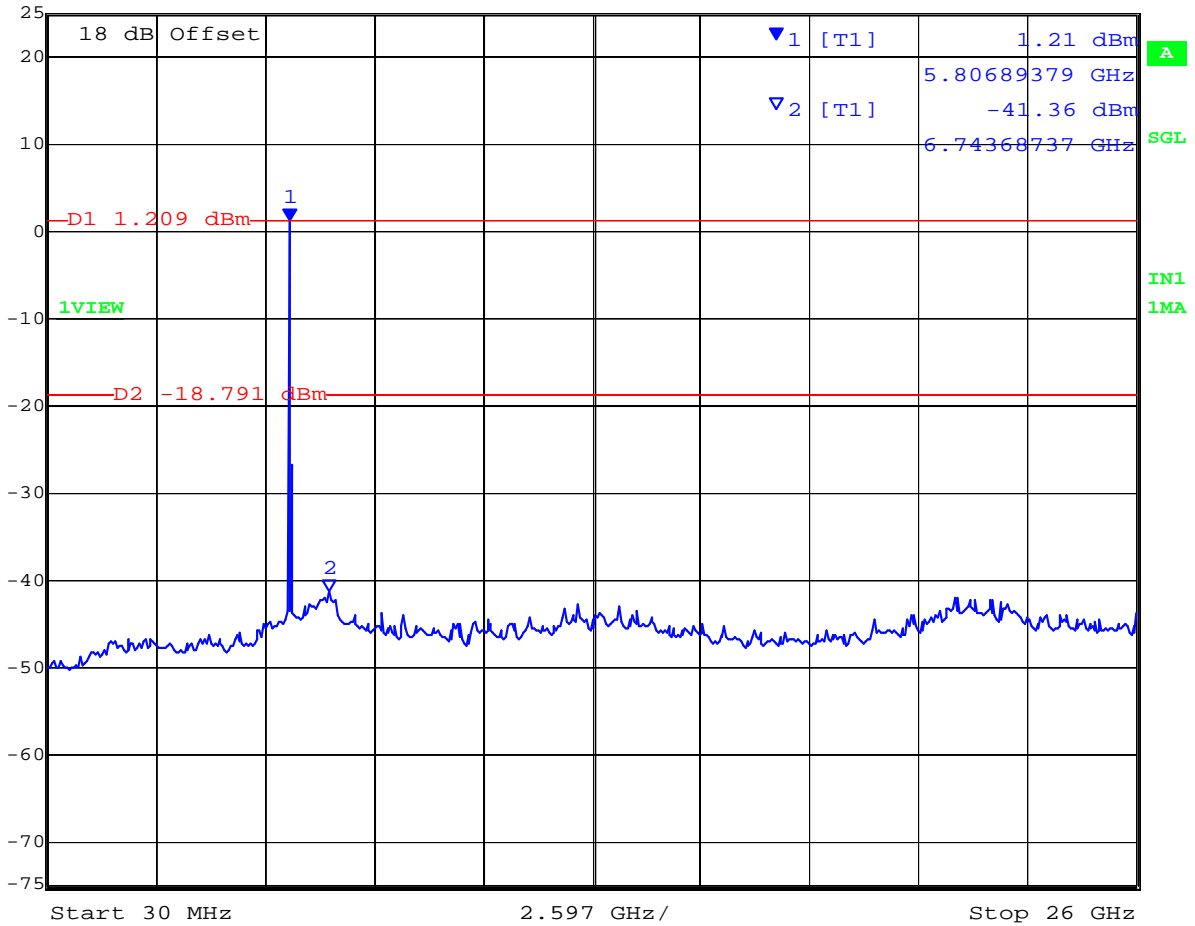


Date: 8.MAR.2012 12:27:27

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### PORT A 802.11a Legacy - Conducted Band Edge Spurious 5725 MHz

Marker 1 [T1] RBW 100 kHz RF Att 20 dB  
Ref Lvl 25 dBm -17.21 dBm VBW 300 kHz  
5.72500000 GHz SWT 20 s Unit dBm

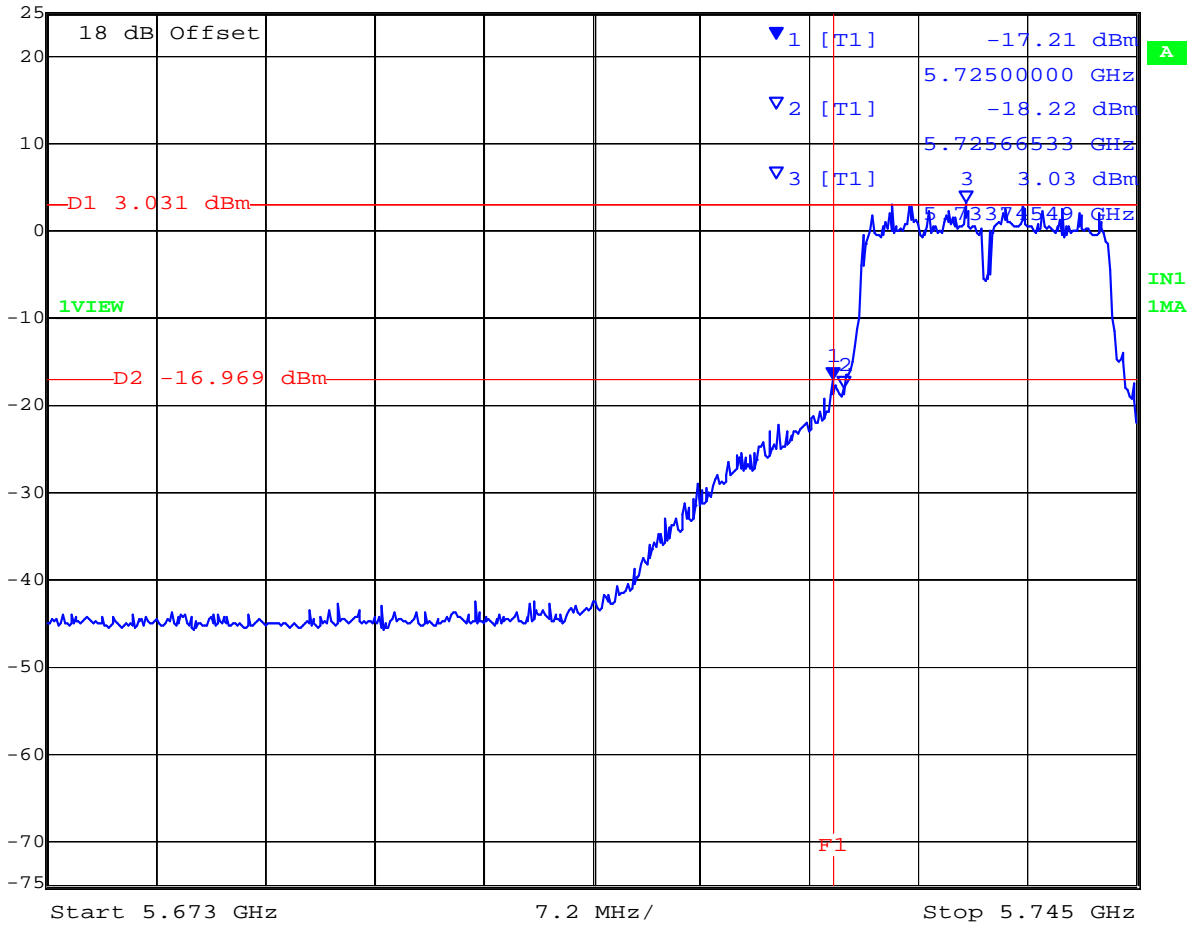

Date: 8.MAR.2012 11:50:52


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### PORT A 802.11a Conducted Spurious Emissions at 5850 MHz Band Edge



Marker 1 [T1] RBW 100 kHz RF Att 20 dB  
Ref Lvl 25 dBm 2.55 dBm VBW 300 kHz  
25 dBm 5.83365731 GHz SWT 20 s Unit dBm

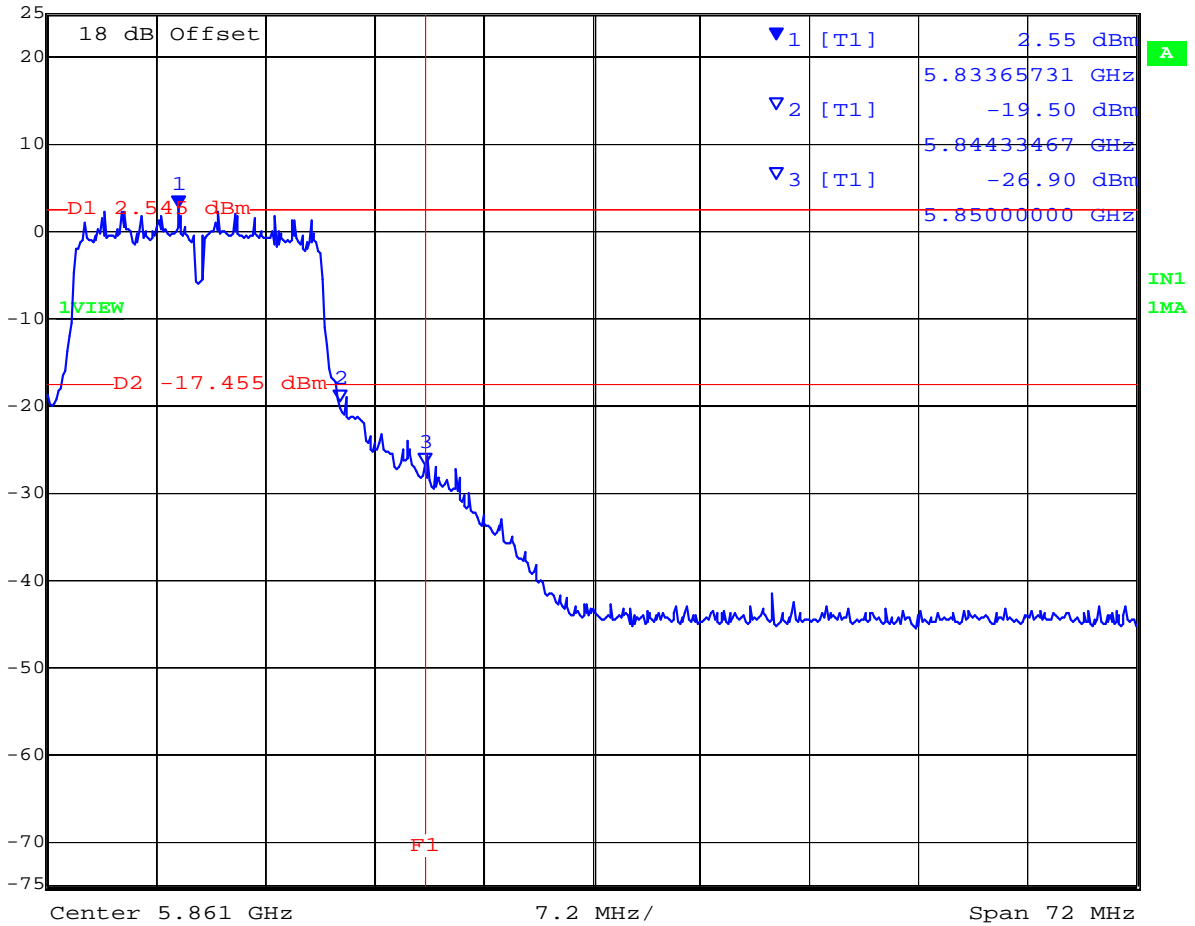

Date: 8.MAR.2012 12:18:55

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## Specification

### Limits Band-Edge

Lower Limit Band-edge	Upper Limit Band-edge	Limit below highest level of desired power
2,400 MHz	2,483.5 MHz	≥ 20 dB
5725 MHz	5850 MHz	

**§15.247(d) and RSS-210 §A8.5** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

#### §15.247(d)

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section §15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(a)).

**RSS-210 §A8.5** If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required. In addition, radiated emissions which fall in the restricted bands of Table 1 must also comply with the radiated emission limits specified in Tables 2 and 3.

#### RSS-Gen §4.7

The search for unwanted emissions shall be from the lowest frequency internally generated or used in the device (local oscillator, intermediate of carrier frequency), or from 30 MHz , whichever is the lowest frequency, to the 5<sup>th</sup> harmonic of the highest frequency generated without exceeding 40 GHz.

### Laboratory Measurement Uncertainty for Conducted Spurious Emissions

Measurement uncertainty	±2.37 dB
-------------------------	----------

### Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-05 'Measurement of Spurious Emissions'	0088, 0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 5.1.6. Radiated Emissions

#### Transmitter Radiated Spurious Emissions (above 1 GHz); Peak Field Strength Measurements; and Radiated Band Edge Measurements – Restricted Bands

**FCC, Part 15 Subpart C §15.247(d) 15.205; 15.209**  
**Industry Canada RSS-210 §A8.5, §2.2, §2.6**  
**Industry Canada RSS-Gen §4.7**

#### Test Procedure

Radiated emissions above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned.

All measurements on any frequency or frequencies over 1 MHz are based on the use of measurement instrumentation employing an average detector function. All measurements above 1 GHz were performed using a minimum resolution bandwidth of 1 MHz.

#### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where: FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss

For example:

Given receiver input reading of 51.5 dB $\mu$ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$


Conversion between dB $\mu$ V/m (or dB $\mu$ V) and  $\mu$ V/m (or  $\mu$ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu\text{V/m}))}$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

### Radiated Emission Measurement Setup – Above 1 GHz

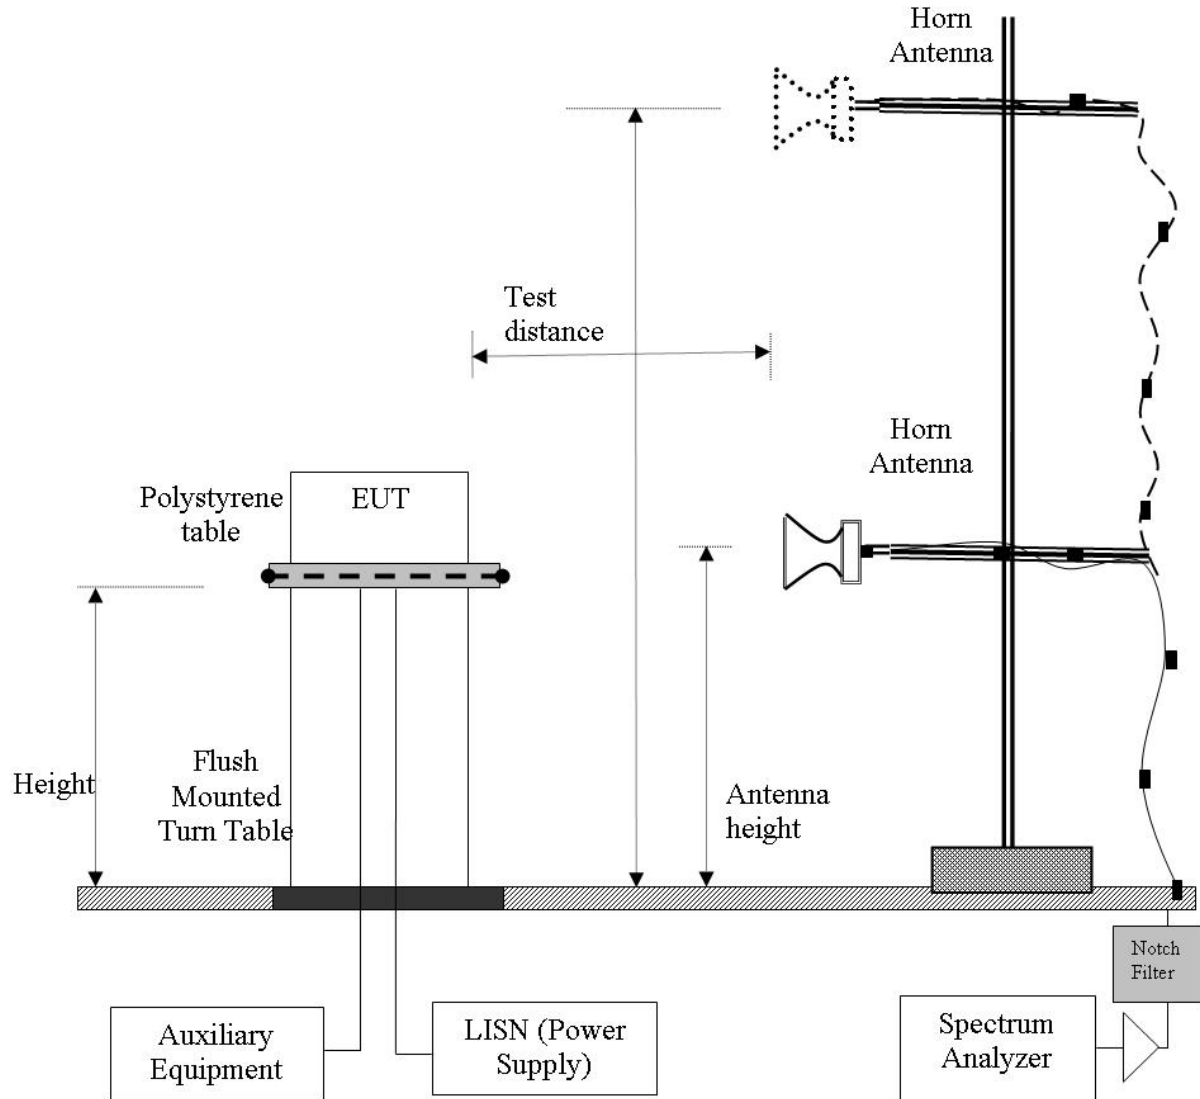


**NOTE: KDB 662911 was implemented for Out-of-Band measurements. Where necessary Option (2) Measure and add 10 log (N) dB was implemented**



### 5.1.6.1. Antenna – Integral

<b>Test Freq.</b>	5735 MHz	<b>Engineer</b>	GMH
<b>Variant</b>	802.11a; 6 Mbs	<b>Temp (°C)</b>	21.5
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	31
<b>Power Setting</b>	Pwr = 16	<b>Press. (mBars)</b>	1006
<b>Antenna</b>	Integral 19 dBi	<b>Duty Cycle (%)</b>	100

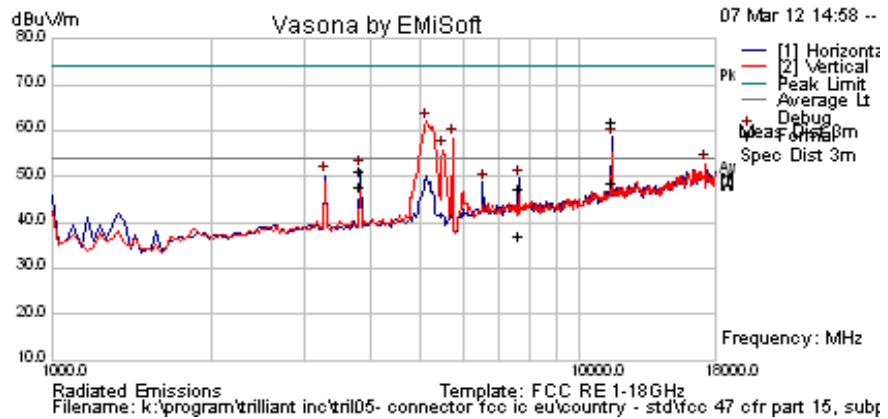

### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
11472.565	57.3	6.8	-2.0	62.0	Peak Max	H	98	243	74.0	-12.0	Pass	RB
3823.393	58.2	3.8	-10.9	51.1	Peak Max	H	99	243	74	-22.9	Pass	RB
7646.699	46.6	5.5	-4.9	47.2	Peak Max	H	98	289	74	-26.8	Pass	RB
11472.565	43.9	6.8	-2.0	48.7	Average Max	H	98	243	54.0	-5.3	Pass	RB
3823.393	54.8	3.8	-10.9	47.7	Average Max	H	99	243	54.0	-6.3	Pass	RB
7646.699	36.6	5.5	-4.9	37.2	Average Max	H	98	289	54	-16.8	Pass	RB
5122.244	67.4	4.6	-10.0	62.1	Peak [Scan]	V					Pass	BE
5735.471	63.1	4.8	-9.5	58.3	Peak [Scan]	V						FUND
5496.994	60.8	4.6	-9.6	55.8	Peak [Scan]	V					Pass	BE
17216.433	43.3	8.6	0.9	52.8	Peak [Scan]	V	100	0	54.0	-1.2	Pass	NOISE
3282.565	58.6	3.5	-11.8	50.3	Peak [Scan]	H	100	0	54.0	-3.7	Pass	NRB
6553.106	50.6	5.2	-7.0	48.8	Peak [Scan]	H	100	0.0	54.0	-5.2	Pass	NRB

**Legend:** TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission  
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.






5735 MHz operation; Restricted Band 5,350 -5,460 MHz



Marker 1 [T1] RBW 1 MHz RF Att 20 dB  
Ref Lvl 100.5 dBV 46.52 dBV VBW 1 MHz  
5.44809619 GHz SWT 10 s Unit dBV

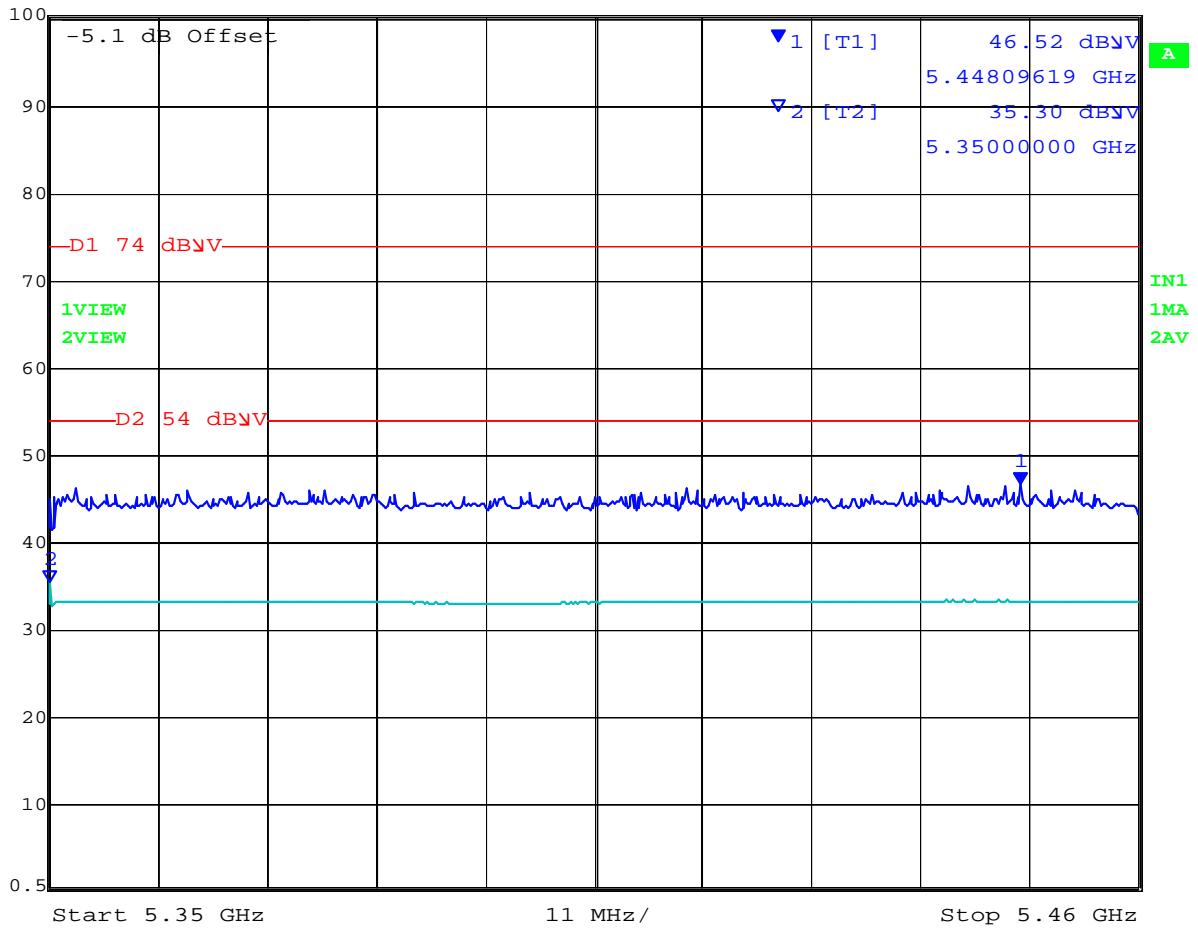


Date: 7.MAR.2012 16:17:27

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



<b>Test Freq.</b>	5785 MHz	<b>Engineer</b>	GMH
<b>Variant</b>	802.11a; 6 Mbs	<b>Temp (°C)</b>	21.5
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	31
<b>Power Setting</b>	Pwr = 16	<b>Press. (mBars)</b>	1006
<b>Antenna</b>	Integral 19 dBi	<b>Duty Cycle (%)</b>	100

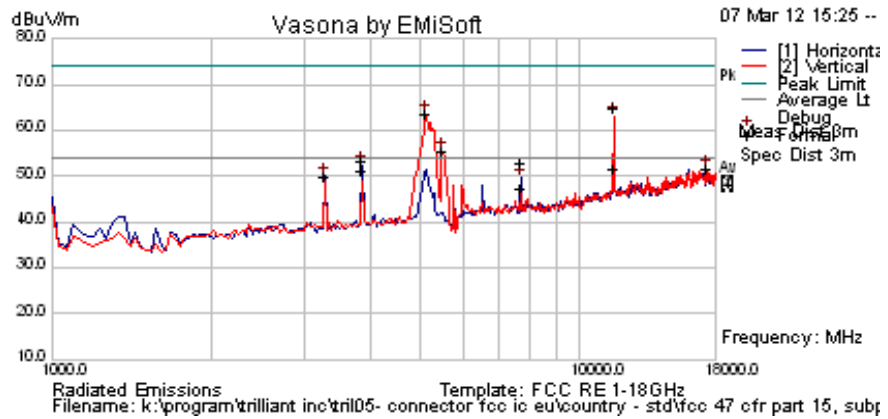

**Formally measured emission peaks**


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
11571.790	60.2	6.8	-2.0	65.0	Peak Max	H	173	261	74.0	-9.0	Pass	RB
3856.717	60.4	3.8	-10.8	53.4	Peak Max	H	98	237	74.0	-20.6	Pass	RB
7713.372	52.0	5.5	-4.7	52.8	Peak Max	H	98	118	74.0	-21.2	Pass	RB
11571.790	46.6	6.8	-2.0	51.4	Average Max	H	173	261	54.0	-2.6	Pass	RB
3856.717	58.1	3.8	-10.8	51.1	Average Max	H	98	237	54.0	-2.9	Pass	RB
7713.372	46.7	5.5	-4.7	47.5	Average Max	H	98	118	54.0	-6.5	Pass	RB
5122.244	68.9	4.6	-10.0	63.6	Peak [Scan]	V					Pass	BE
5496.994	60.4	4.6	-9.6	55.4	Peak [Scan]	V					Pass	BE
17352.705	41.6	8.7	1.3	51.6	Peak [Scan]	H	150	0	54.0	-2.4	Pass	NOISE
3282.565	58.3	3.5	-11.8	49.9	Peak [Scan]	H					Pass	NRB


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission  
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



5785 MHz operation; Restricted Band 5,350 -5,460 MHz

 Marker 1 [T1] RBW 1 MHz RF Att 20 dB  
Ref Lvl 100.5 dBμV 46.59 dBμV VBW 1 MHz  
100.5 dBμV 5.40268537 GHz SWT 10 s Unit dBμV

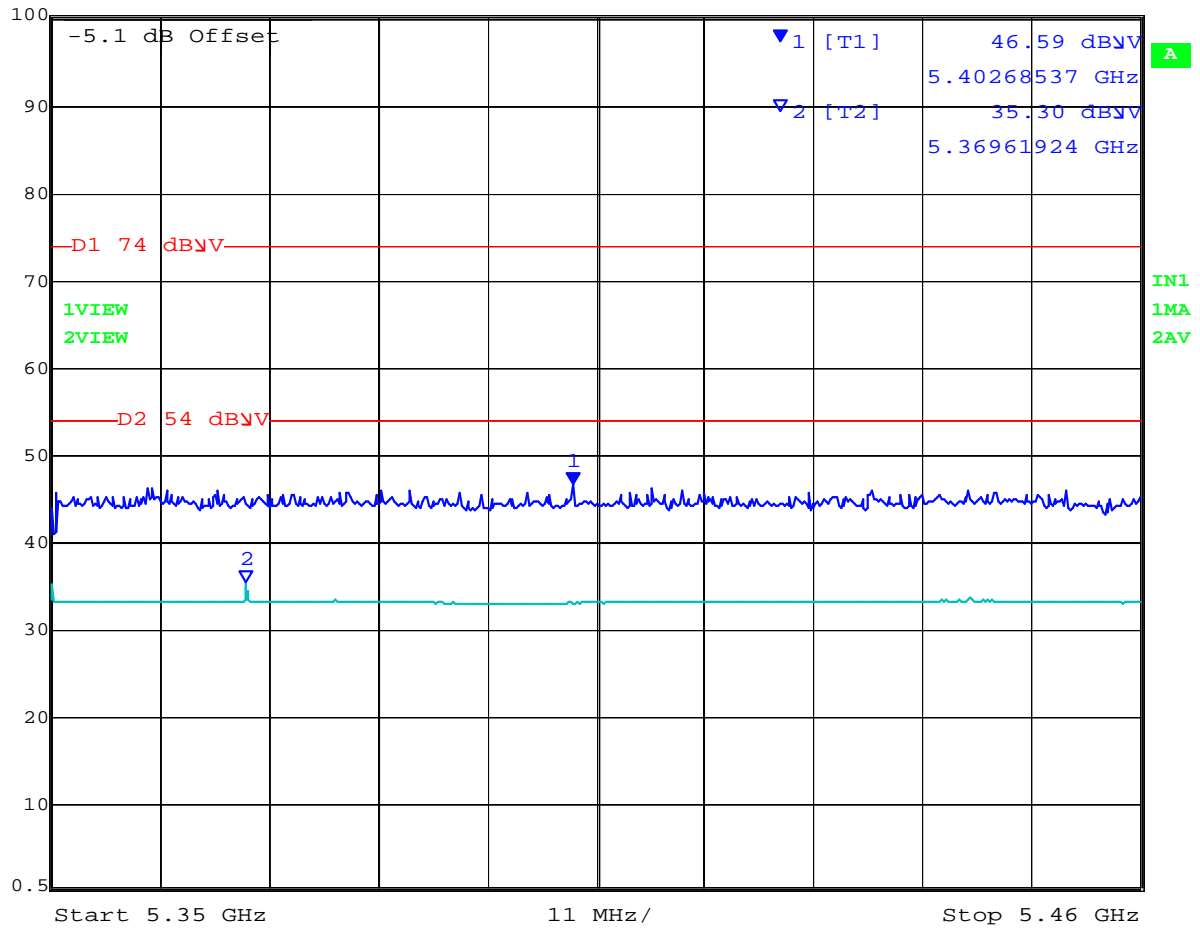


Date: 7.MAR.2012 16:13:58

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



<b>Test Freq.</b>	5835 MHz	<b>Engineer</b>	GMH
<b>Variant</b>	802.11a; 6 Mbs	<b>Temp (°C)</b>	21.5
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	31
<b>Power Setting</b>	Pwr = 16	<b>Press. (mBars)</b>	1006
<b>Antenna</b>	Integral 19 dBi	<b>Duty Cycle (%)</b>	100

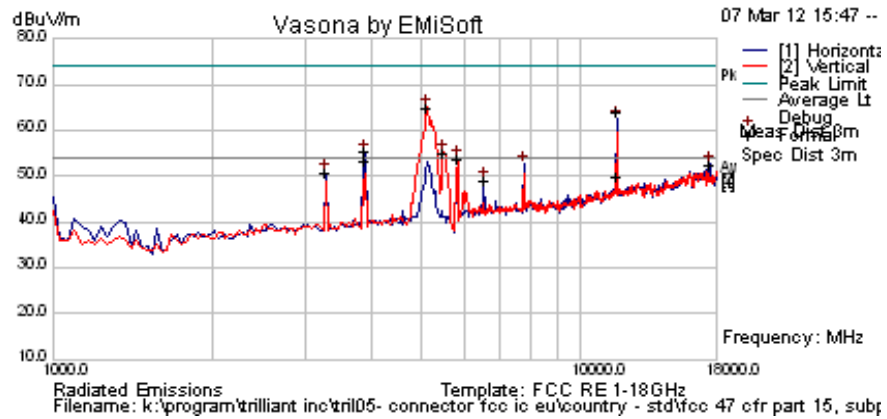

**Formally measured emission peaks**


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
11666.811	59.5	6.8	-2.3	64.0	Peak Max	H	131	254	74.0	-10.0	Pass	RB
3890.029	62.3	3.8	-10.7	55.5	Peak Max	H	98	217	74.0	-18.5	Pass	RB
11666.811	45.6	6.8	-2.3	50.1	Average Max	H	131	254	54.0	-3.9	Pass	RB
3890.029	60.2	3.8	-10.7	53.4	Average Max	H	98	217	54.0	-0.6	Pass	RB
5122.244	70.4	4.6	-10.0	65.1	Peak [Scan]	V					Pass	BE
5496.994	60.2	4.6	-9.6	55.2	Peak [Scan]	V					Pass	BE
5837.675	58.3	4.8	-9.3	53.9	Peak [Scan]	H						FUND
17523.046	42.9	8.8	0.9	52.6	Peak [Scan]	H	100	0	54.0	-1.4	Pass	NOISE
3282.565	58.9	3.5	-11.8	50.6	Peak [Scan]	H					Pass	NRB
6553.106	50.7	5.2	-7.0	48.9	Peak [Scan]	H					Pass	NRB


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission  
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



5835 MHz operation; Restricted Band 5,350 -5,460 MHz

 Marker 1 [T1] RBW 1 MHz RF Att 20 dB  
Ref Lvl 100.5 dBμV 46.59 dBμV VBW 1 MHz  
100.5 dBμV 5.40268537 GHz SWT 10 s Unit dBμV

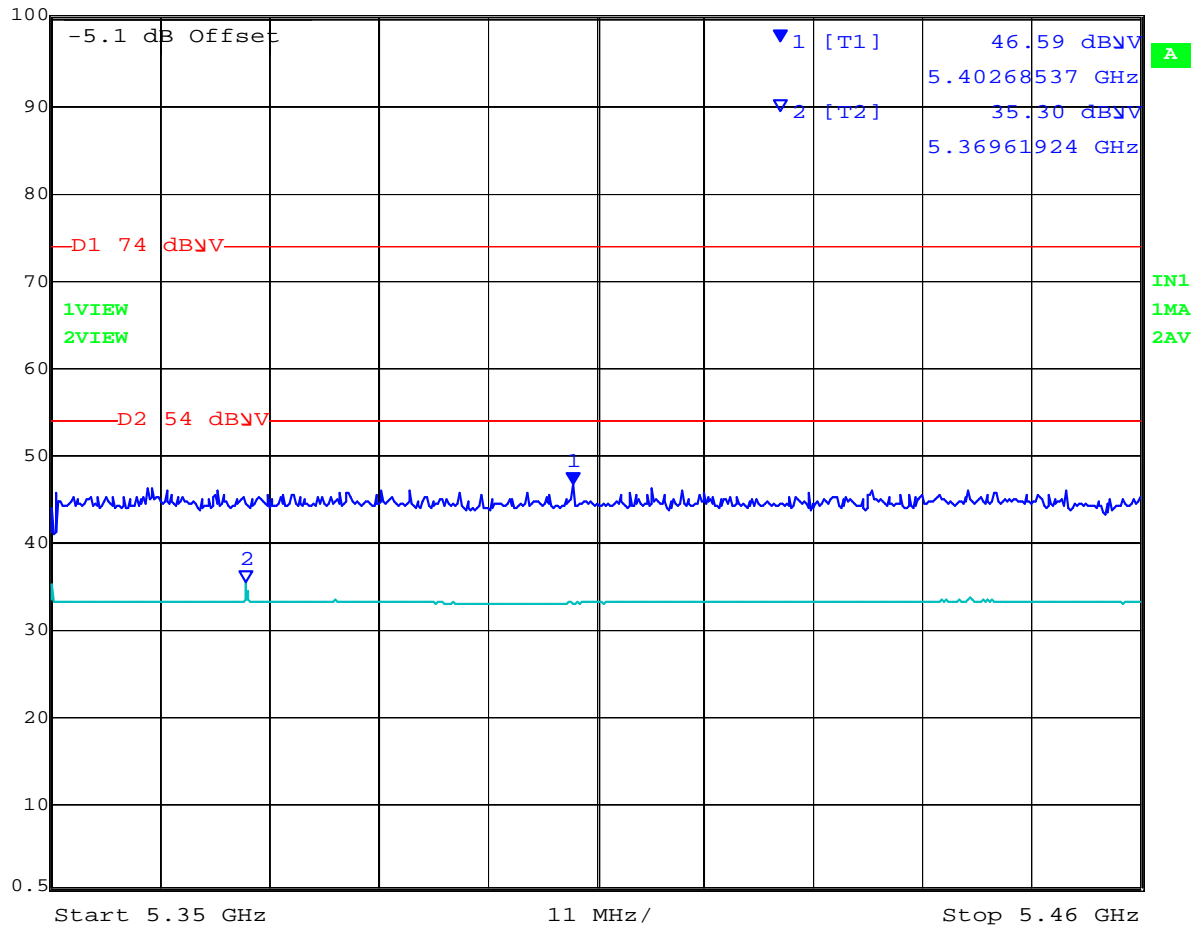

Date: 7.MAR.2012 16:13:58

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## Specification Limits

**FCC §15.247(d) and RSS-210 §A8.5** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

### **FCC §15.247(d)**

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section §15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(a)).

**IC RSS-210 §A8.5** If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required. In addition, radiated emissions which fall in the restricted bands of Table 1 must also comply with the radiated emission limits specified in Tables 2 and 3.

### **IC RSS-Gen §4.7**

The search for unwanted emissions shall be from the lowest frequency internally generated or used in the device (local oscillator, intermediate or carrier frequency), or from 30 MHz, whichever is the lowest frequency, to the 5<sup>th</sup> harmonic of the highest frequency generated without exceeding 40 GHz.

**FCC §15.205 (a)** Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

**FCC §15.205 (a)** Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

**FCC §15.209 (a)** Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.



**§15.209 (a) Limit Matrix**

Frequency(MHz)	Field Strength ( $\mu\text{V/m}$ )	Field Strength ( $\text{dB}\mu\text{V/m}$ )	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

**Laboratory Measurement Uncertainty for Radiated Emissions**

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

**Traceability**

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### 5.1.6.2. Radiated Spurious Emissions (30M-1 GHz)

**FCC, Part 15 Subpart C §15.205/ §15.209**  
**Industry Canada RSS-210 §2.2**

#### Test Procedure

Testing 30M-1 GHz was performed in a 3-meter anechoic chamber using a CISPR compliant receiver. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. To further maximize emissions the receive antenna was varied between 1 and 4 meters. The emissions are recorded with receiver in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed. The anechoic chamber test set-up is identified in Section 6 Test Set-Up Photographs.

The EUT had two methods of powering on ac/dc converter and Power over Ethernet (POE). Both modes were tested for emissions below 1GHz.

#### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength  
R = Measured Receiver Input Amplitude  
AF = Antenna Factor  
CORR = Correction Factor = CL – AG + NFL  
CL = Cable Loss  
AG = Amplifier Gain

For example:

Given a Receiver input reading of 51.5dB $\mu$ V; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dB}\mu\text{V/m}$$

Conversion between dB $\mu$ V/m (or dB $\mu$ V) and  $\mu$ V/m (or  $\mu$ V) are done as:


$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu\text{V/m}))}$$

$$40 \text{ dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250\mu\text{V/m}$$




### Radiated Emission Measurement Setup – Below 1 GHz

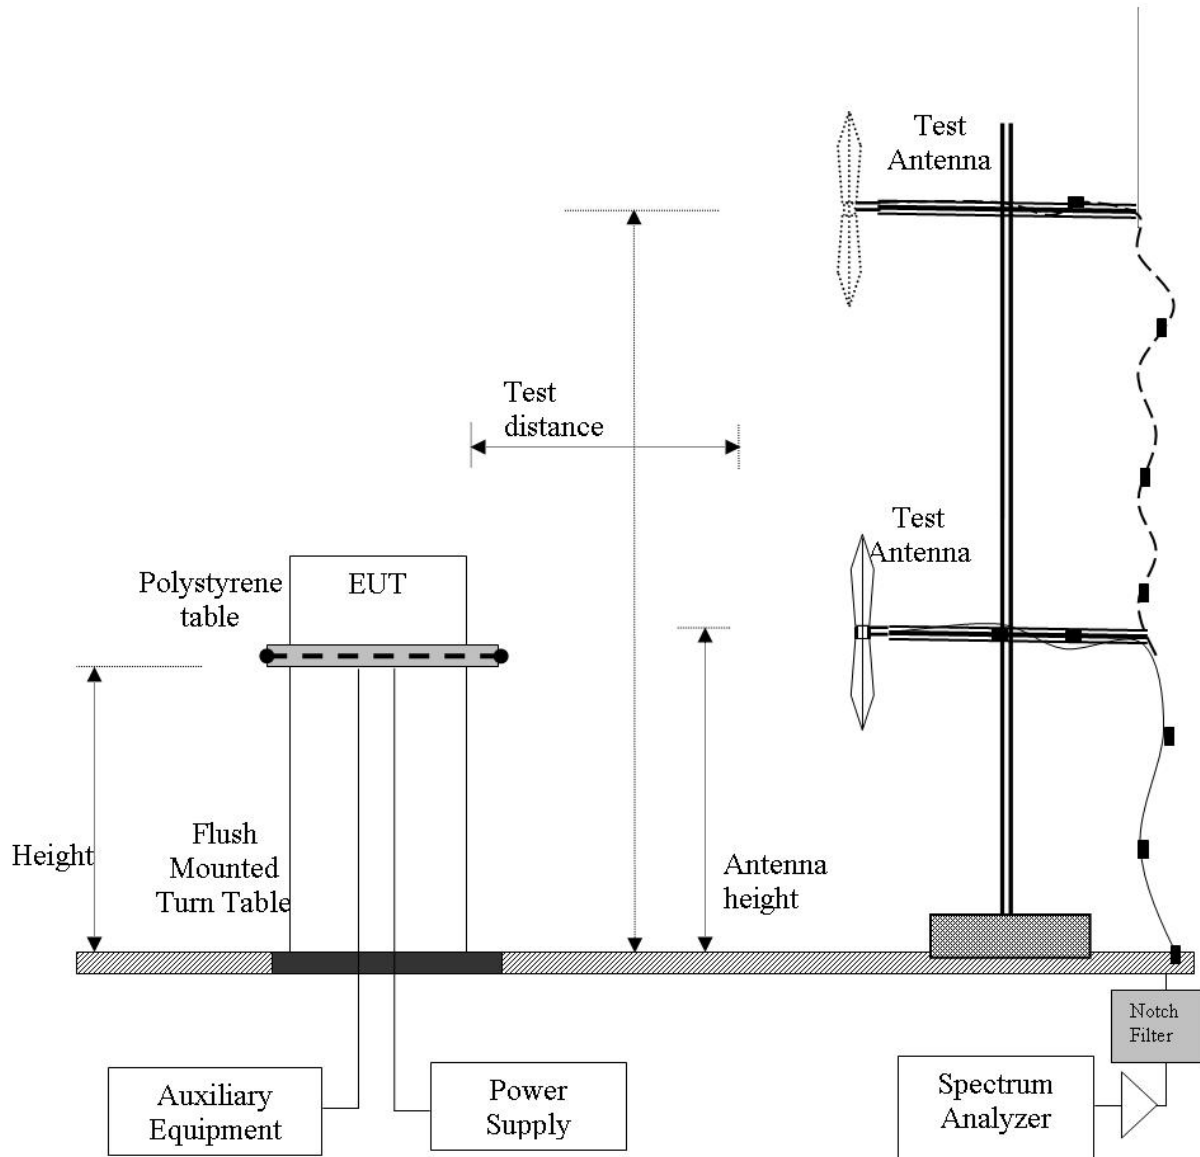

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



<b>Test Freq.</b>	5500 MHz	<b>Engineer</b>	SB
<b>Variant</b>	Digital Emissions	<b>Temp (°C)</b>	19.5
<b>Freq. Range</b>	30 MHz - 1000 MHz	<b>Rel. Hum.(%)</b>	33
<b>Power Setting</b>	Max Power	<b>Press. (mBars)</b>	1005
<b>Antenna</b>			

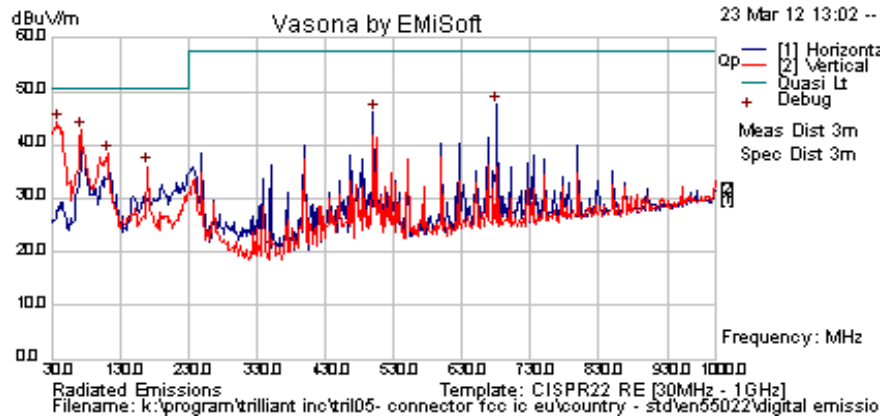

### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
37.776	56.5	3.6	-15.9	44.2	Peak [Scan]	V	100	0	50.5	-6.3	Pass	
72.766	61.9	3.9	-23.1	42.7	Peak [Scan]	V	100	0	50.5	-7.8	Pass	
681.202	51.4	6.5	-10.4	47.5	Peak [Scan]	H	100	0	57.5	-10.0	Pass	
500.421	53.2	5.8	-12.8	46.1	Peak [Scan]	H	200	0	57.5	-11.4	Pass	
111.643	52.6	4.2	-18.5	38.3	Peak [Scan]	V	100	0	50.5	-12.2	Pass	
169.960	50.8	4.5	-19.4	35.9	Peak [Scan]	V	100	0	50.5	-14.6	Pass	

Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency  
 NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## Specification

### Limits

**§15.205 (a)** Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

**§15.205 (a)** Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

**§15.209 (a)** Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

### §15.209 (a) and RSS-Gen §2.2 Limit Matrix

Frequency(MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

### Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

### Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


### 5.1.7. ac Wireline Conducted Emissions (150 kHz – 30 MHz)

**FCC, Part 15 Subpart C §15.207**  
**Industry Canada RSS-Gen §7.2.2**

#### **Test Procedure**

The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

#### **Test Measurement Set up**

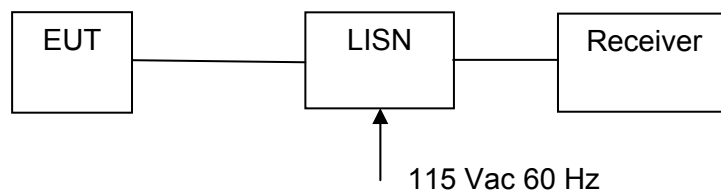

Measurement set up for AC Wireline Conducted Emissions Test


#### **Measurement Results for AC Wireline Conducted Emissions (150 kHz – 30 MHz)**

Ambient conditions.

Temperature: 17 to 23 °C      Relative humidity: 31 to 57 %      Pressure: 999 to 1012 mbar



<b>Test Freq.</b>	5735 MHz	<b>Engineer</b>	GMH
<b>Variant</b>	AC Line Emissions	<b>Temp (°C)</b>	22
<b>Freq. Range</b>	0.150 MHz - 30 MHz	<b>Rel. Hum.(%)</b>	34
<b>Power Setting</b>	Maximum	<b>Press. (mBars)</b>	1008
<b>Antenna</b>	N/A		
<b>Test Notes 1</b>	Class A		
<b>Test Notes 2</b>			

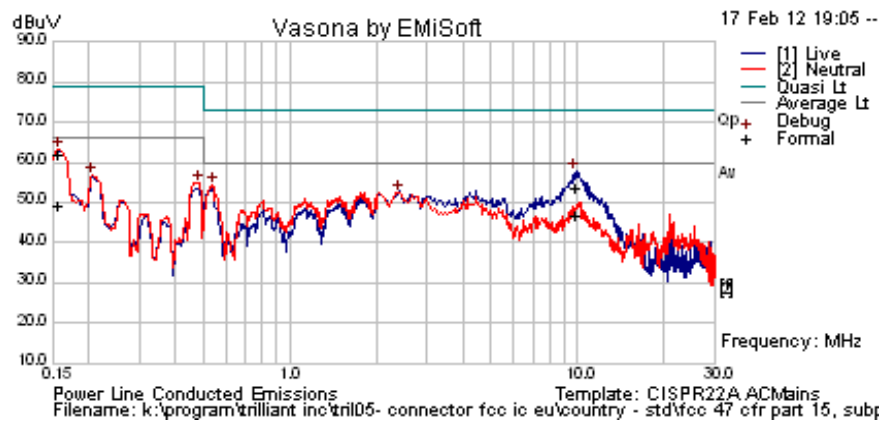

### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line	Limit dBuV	Margin dB	Pass /Fail	Comments
0.541	44.1	9.9	0.1	54.1	Peak [Scan]	Neutral	60.0	-5.9	Pass	
0.483	44.8	9.9	0.1	54.8	Peak [Scan]	Neutral	66.0	-11.2	Pass	
2.404	42.2	10.1	0.1	52.4	Peak [Scan]	Neutral	60	-7.7	Pass	
0.206	46.7	9.9	0.1	56.6	Peak [Scan]	Neutral	66	-9.4	Pass	
9.912	42.8	10.3	0.4	53.5	Quasi Peak	Live	73	-19.5	Pass	
0.157	51.8	9.9	0.1	61.7	Quasi Peak	Neutral	79	-17.3	Pass	
9.912	36.1	10.3	0.4	46.8	Average	Live	60	-13.2	Pass	
0.157	39.4	9.9	0.1	49.3	Average	Neutral	66	-16.7	Pass	

Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency  
 NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## Specification

### Limit

**§15.207 (a)** Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu\Omega$  line impedance stabilization network (LISN), see §15.207 (a) matrix below. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

### RSS-Gen §7.2.2

The radio frequency voltage that is conducted back into the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table below. The tighter limit applies at the frequency range boundaries.

### §15.207 (a) and RSS-Gen §7.2.2 Limit Matrix

The lower limit applies at the boundary between frequency ranges

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency

### Laboratory Measurement Uncertainty for Conducted Emissions

Measurement uncertainty	$\pm 2.64$ dB
-------------------------	---------------


### Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-EMC-01 'Measurement of Conducted Emissions'	0158, 0184, 0287, 0190, 0293, 0307

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## 6. PHOTOGRAPHS

### 6.1. Radiated Emissions Below 1 GHz - Test Setup

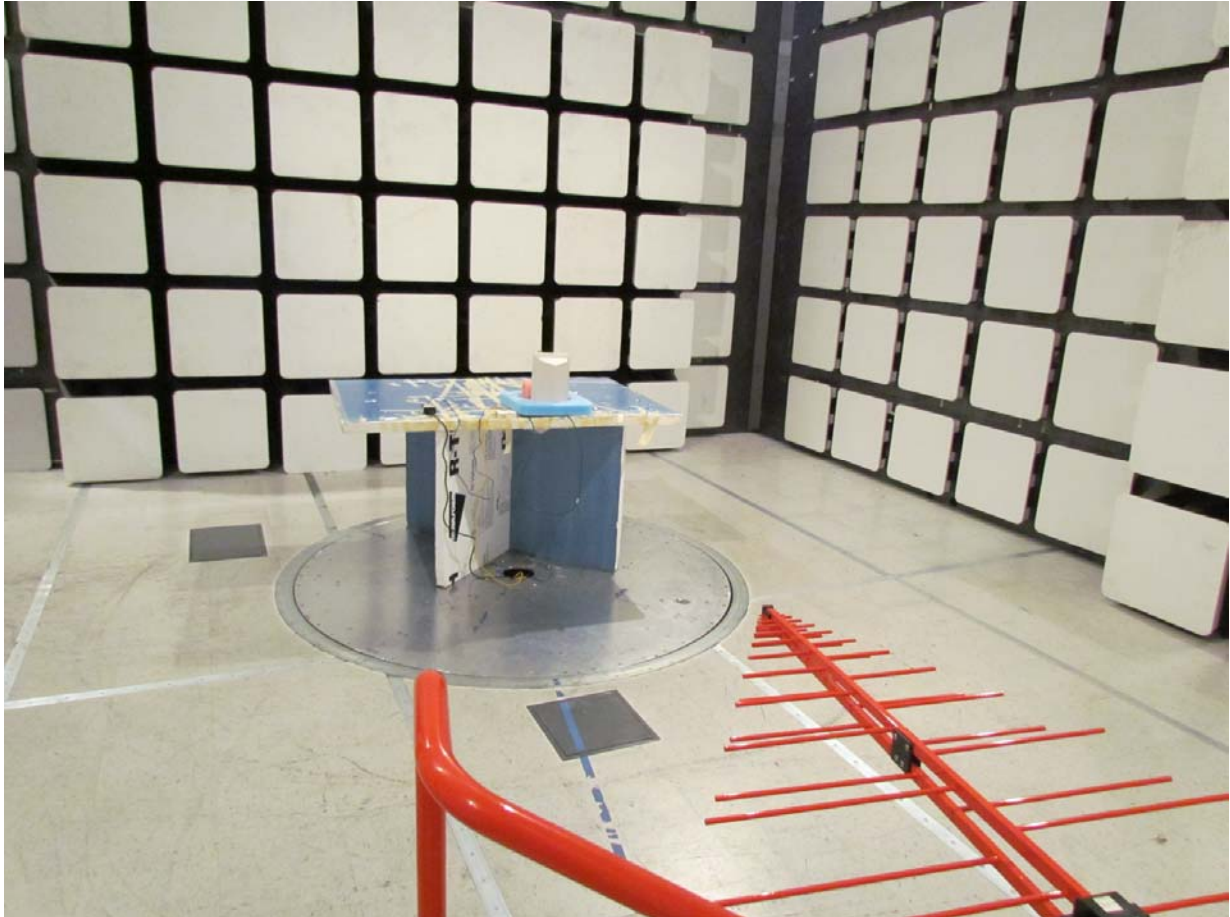


---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## 6.2. Radiated Emissions Above 1 GHz - Test Setup

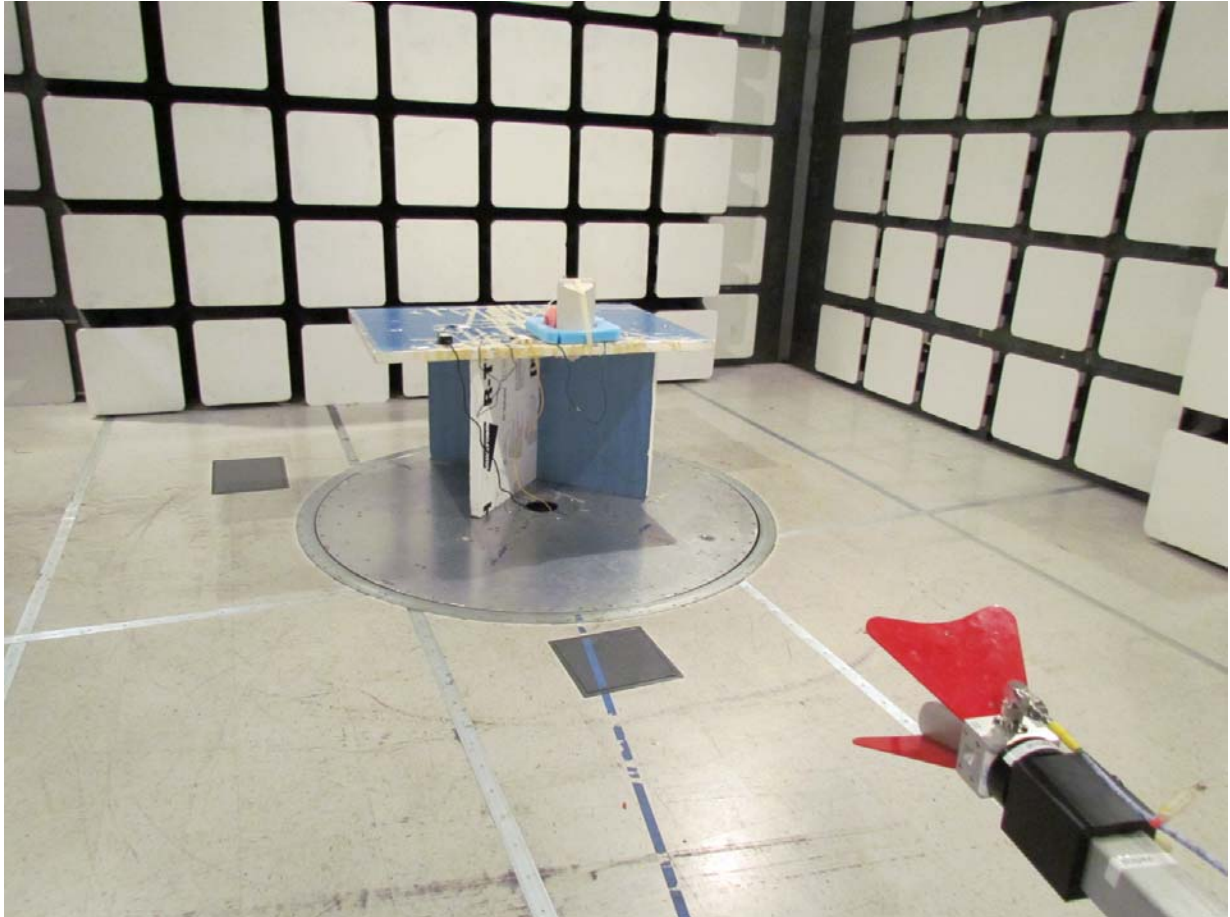

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 6.3. ac Wireline Emissions



---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## 7. TEST EQUIPMENT DETAILS

Asset #	Instrument	Manufacturer	Part #	Serial #	Calibration Due Date
0070	Power Meter	Hewlett Packard	437B	3125U11552	28 <sup>th</sup> Nov 12
0117	Power Sensor	Hewlett Packard	8487D	3318A00371	15 <sup>th</sup> Nov 12
0223	Power Meter	Hewlett Packard	EPM-442A	US37480256	15 <sup>th</sup> Nov 12
0374	Power Sensor	Hewlett Packard	8485A	3318A19694	29 <sup>th</sup> Nov 12
0158	Barometer /Thermometer	Control Co.	4196	E2846	8 <sup>th</sup> Dec 12
0193	EMI Receiver	Rhode & Schwartz	ESI 7	838496/007	2 <sup>nd</sup> Dec 12
0287	EMI Receiver	Rhode & Schwartz	ESIB40	100201	16 <sup>th</sup> Nov 12
0338	30 - 3000 MHz Antenna	Sunol	JB3	A052907	8 <sup>th</sup> Nov 12
0335	1-18 GHz Horn Antenna	EMCO	3117	00066580	7 <sup>th</sup> Nov 12
0252	SMA Cable	Megaphase	Sucoflex 104	None	N/A
0293	BNC Cable	Megaphase	1689 1GVT4	15F50B001	N/A
0307	BNC Cable	Megaphase	1689 1GVT4	15F50B002	N/A
0310	2m SMA Cable	Micro-Coax	UFA210A-0-0787-3G03G0	209089-001	N/A
0312	3m SMA Cable	Micro-Coax	UFA210A-1-1181-3G0300	209092-001	N/A
0314	30dB N-Type Attenuator	ARRA	N9444-30	1623	N/A

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



440 Boulder Court, Suite 200  
Pleasanton, CA 94566, USA  
Tel: 1.925.462.0304  
Fax: 1.925.462.0306  
[www.micomlabs.com](http://www.micomlabs.com)