

SF-245W-10SR



2.4GHz Mesh A/P antenna, 10 deg down-tilt

Specifications:




- 2400-2500MHz
- Gain: 7.4dBi
- Length: 17.5 inches
- Weight: 4.7 oz
- -3dB Beam-width: 20 degrees
- Cross Polar Rejection: 15dB +
- Max Power: 50 watts
- Max wind survival: 150MPH +
- Wind Load: 7.1 sq in
- Connector: Integral N-male
- Radome: White UV stabilized fiberglass
- DC Shunt for lightning protection
- RoHS Compliant
- Mast mounting hardware optional

Vertical radiation pattern

NEW SF-245-10
2400MHz
最大レベル: -57.14dB
計算利得R: 7.467dBi

2450MHz
最大レベル: -55.97dB
計算利得R: 7.517dBi

2500MHz
最大レベル: -56.32dB
計算利得R: 7.279dBi

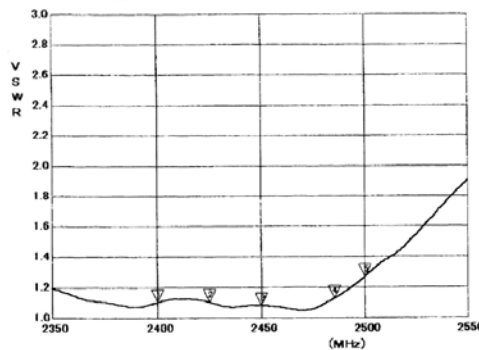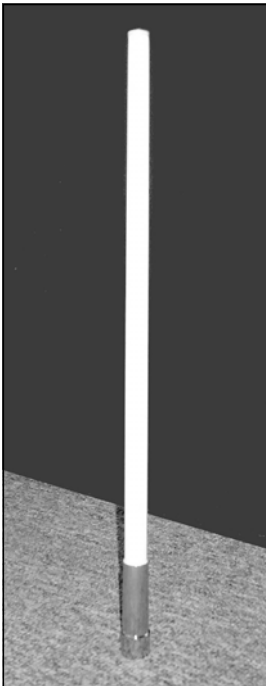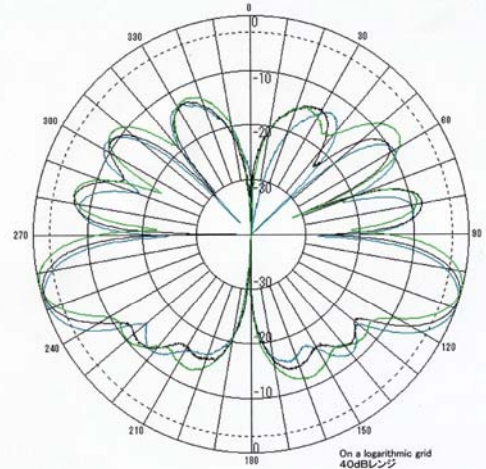

Marker List
1: 2400MHz 1.105
2: 2425MHz 1.104
3: 2450MHz 1.082
4: 2485MHz 1.130
5: 2500MHz 1.271

VSWR

1.13:1 or less

NCG Company

1275 N. Grove St.
Anaheim, CA 92806-2114

Phone: 800.962.2611

Fax: 714.630.7024

Email: micks@natcommgroup.com

FEATURES:

- 802.11b and 802.11g compatible
- 10 degree down-tilt provides concentrated signal below the antenna
- Male N-connector for easy installation
- Compact gain antenna for point-to-multipoint applications
- Heavy duty fiberglass for durability
- Weather proof for indoor or outdoor installation

MOUNTING OPTIONS:

- MB-100: 1"-2.5" mast mount

Manufactured by: COMET Company Ltd.

