



**FCC CFR47 PART 90 SUBPART Y  
CERTIFICATION  
TEST REPORT**

**FOR**

**FIXED WIRELESS NODE (802.11 BASED)**

**MODEL NUMBER: SC3111**

**FCC ID: RV7-SC3111**

**REPORT NUMBER: 07U11263-3**

**ISSUE DATE: SEPTEMBER 24, 2007**

*Prepared for*  
**SKYPILOT NETWORK INC  
2055 LAURELWOOD ROAD 2NDFLOOR  
SANTA CLARA, CA 95054, USA**

*Prepared by*  
**COMPLIANCE CERTIFICATION SERVICES  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

---

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	09/24/07	Initial Issue	T. Chan

---

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS.....</b>	<b>4</b>
<b>2. TEST METHODOLOGY .....</b>	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>5</b>
<b>4. CALIBRATION AND UNCERTAINTY.....</b>	<b>5</b>
4.1. MEASURING INSTRUMENT CALIBRATION.....	5
4.2. MEASUREMENT UNCERTAINTY.....	5
<b>5. EQUIPMENT UNDER TEST.....</b>	<b>6</b>
5.1. DESCRIPTION OF EUT .....	6
5.2. MAXIMUM OUTPUT POWER .....	6
5.3. DESCRIPTION OF AVAILABLE ANTENNAS .....	6
5.4. SOFTWARE AND FIRMWARE.....	6
5.5. WORST-CASE CONFIGURATION AND MODE .....	6
5.6. DESCRIPTION OF TEST SETUP .....	7
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>9</b>
<b>7. LIMITS AND RESULTS .....</b>	<b>10</b>
7.1. CHANNEL TESTS .....	10
7.1.1. EMISSION BANDWIDTH .....	10
7.1.2. PEAK OUTPUT POWER .....	14
7.1.3. MAXIMUM PERMISSIBLE EXPOSURE .....	18
7.1.4. AVERAGE POWER.....	21
7.1.5. PEAK POWER SPECTRAL DENSITY .....	22
7.1.6. EMISSION MASK AND CONDUCTED SPURIOUS.....	26
7.2. RADIATED EMISSIONS.....	33
7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS .....	33
7.2.2. TRANSMITTER ABOVE 1 GHz .....	35
7.2.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz.....	36
7.3. FREQUENCY STABILITY.....	37
7.4. POWERLINE CONDUCTED EMISSIONS .....	39
<b>8. SETUP PHOTOS .....</b>	<b>43</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SKYPILOT NETWORK INC  
2055 LAURELWOOD ROAD 2<sup>ND</sup> FLOOR  
SANTA CLARA, CA 95054, USA

**EUT DESCRIPTION:** SKY CONNECTOR OUTDOOR, 802.11 BASED, FIXED WIRELESS NODE

**MODEL:** SC3130

**SERIAL NUMBER:** F07040001

**DATE TESTED:** AUGUST 19-27, 2007

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 90 SUBPART Y	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.


**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:



THU CHAN  
EMC SUPERVISOR  
COMPLIANCE CERTIFICATION SERVICES

Tested By:



KEITH NG  
EMC EMNGINEER  
COMPLIANCE CERTIFICATION SERVICES

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA/EIA 603C (2004), ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 90.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is an 802.11 based, fixed wireless node.

The radio module is manufactured by SkyPilot.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
4950 - 4980	20 MHz Bandwidth	11.89	15.45

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio is equipped with an integrated patch antenna with a maximum gain of 17dBi.

### 5.4. SOFTWARE AND FIRMWARE

The radio is connected by the laptop through telnet, and controlled by a script language called vxshell.

### 5.5. WORST-CASE CONFIGURATION AND MODE

The EUT is a depopulated version of the dual band model SC3130, in which the 2.4 GHz band circuitry is not installed on the PC board. Preliminary tests demonstrate that the emissions of the dual band version are higher than the emissions of the single band version. The performance of the EUT is represented by the worst-case data measured on the dual band version, as presented in this report.

## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	DELL	INSPIRON 8100	CN-03N642-12961-21E	DoC
AC Adapter	DELL	AA20031	CN-09364U-16291	DoC
AC -RJ45 Adapter	ACRO POWER	AXS-30S-24/D7(RJ)	155	DoC


### I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US 115V	Un-shielded	2m	N/A
2	DC	1	DC	Un-shielded	2m	N/A
3	Ethernet	1	RJ45	Un-shielded	2m	Laptop to Adapter
4	Ethernet	1	RJ45	Un-shielded	2m	EUT to Adapter
5	AC	1	US 115V	Un-shielded	2m	N/A

### TEST SETUP

As the EUT is powered over internet, it is connected to a host laptop computer via unshielded crossover LAN cable through adapter during the tests. Test software exercised the radio card.

**SETUP DIAGRAM FOR TESTS**

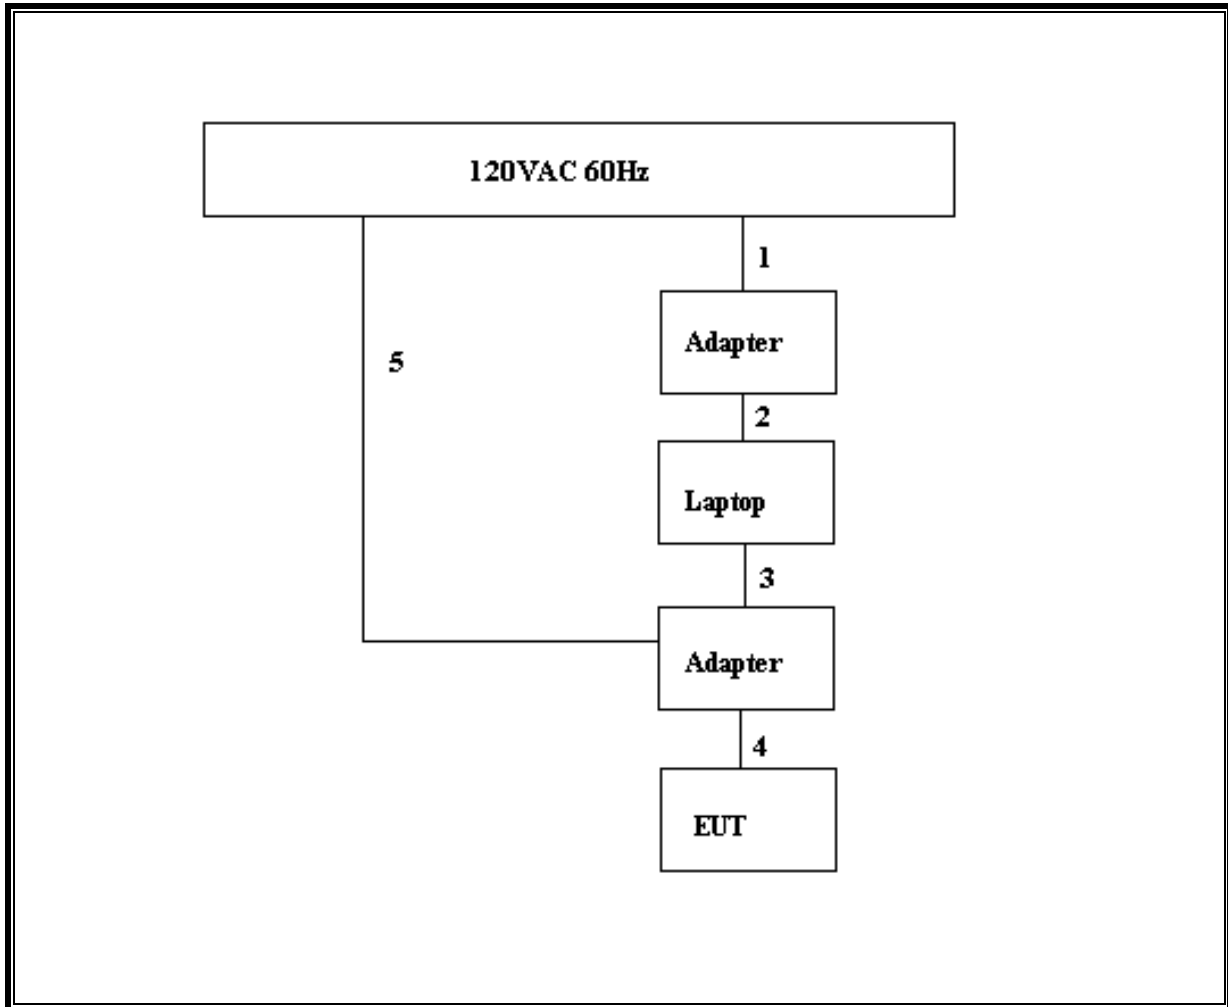



## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
Spectrum Analyzer 3 Hz ~ 44 GHz	Agilent / HP	E4446A	MY43360112	12/18/07
Peak Power Meter	Agilent / HP	E4416A	GB41291160	12/02/07
Peak / Average Power Sensor	Agilent	E9327A	US40440755	12/02/07
Temperature / Humidity Chamber	Thermotron	SE 600-10-10	29800	04/16/08
EMI Receiver, 9 kHz ~ 2.9 GHz	Agilent / HP	8542E	3942A00286	6/12//2008
RF Filter Section	Agilent / HP	85420E	3705A00256	6/12//2008
Antenna, Bilog 30 MHz ~ 2 GHz	Sunol Sciences	JB1	A121003	6/12//2008
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	6717	04/22/08
Preamplifier, 1 ~ 26.5 GHz	Agilent / HP	8449B	3008A00931	06/24/08
Antenna, Horn 1 ~ 18 GHz	ETS	3117	29310	04/22/08
Preamplifier, 1 ~ 26.5 GHz	Agilent / HP	8449B	3008A00561	06/24/08

## 7. LIMITS AND RESULTS

### 7.1. CHANNEL TESTS

#### 7.1.1. EMISSION BANDWIDTH

##### LIMIT

For reporting purposes only.

##### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 1% to 3% of the 26 dB bandwidth and /or the 99% bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled.

##### RESULTS

No non-compliance noted:


##### 26 dB Bandwidth


Channel	Frequency (MHz)	26 dB BW (MHz)	10 Log B (dB)
Low	4950	23.038	13.62
Middle	4965	23.146	13.64
High	4980	23.453	13.70


##### 99% Bandwidth

Channel	Frequency (MHz)	99% BW (MHz)
Low	4950	16.8471
Middle	4965	16.8374
High	4980	16.8515

**26 dB EMISSION BANDWIDTH**

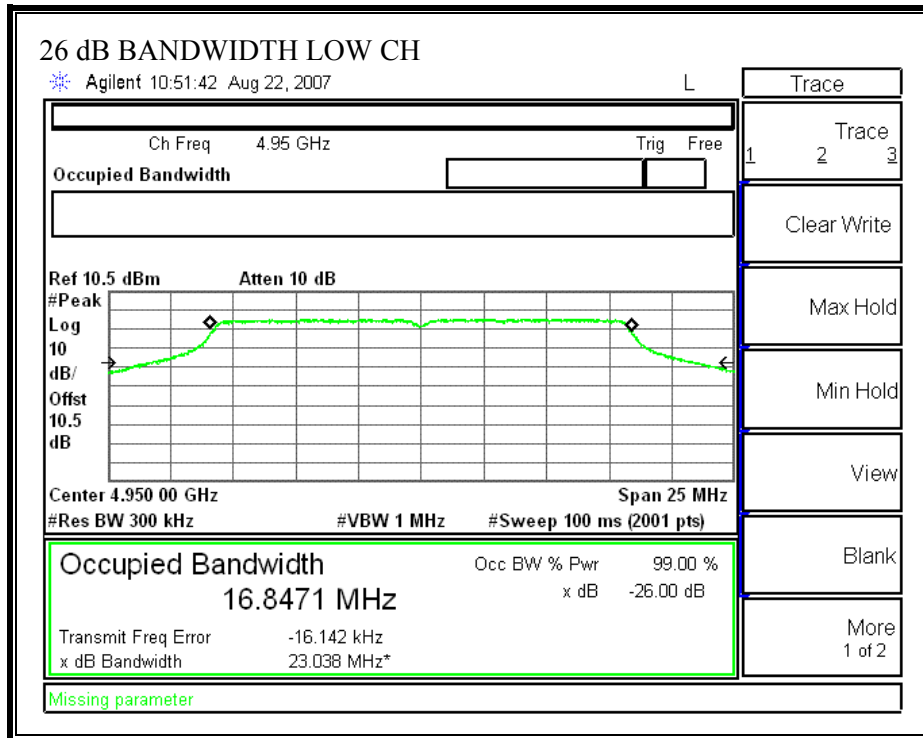

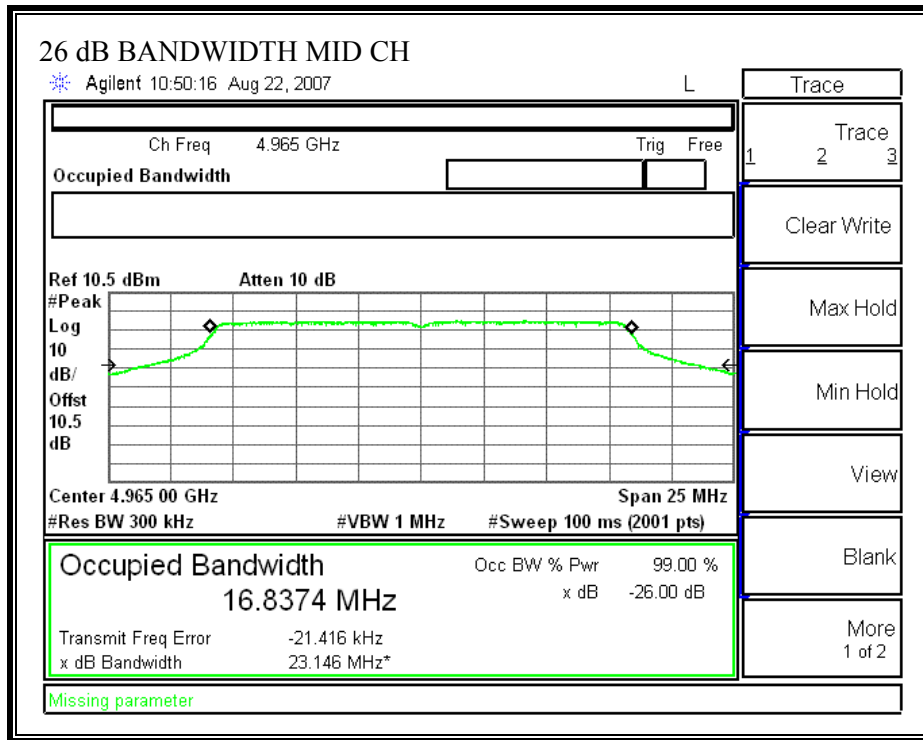

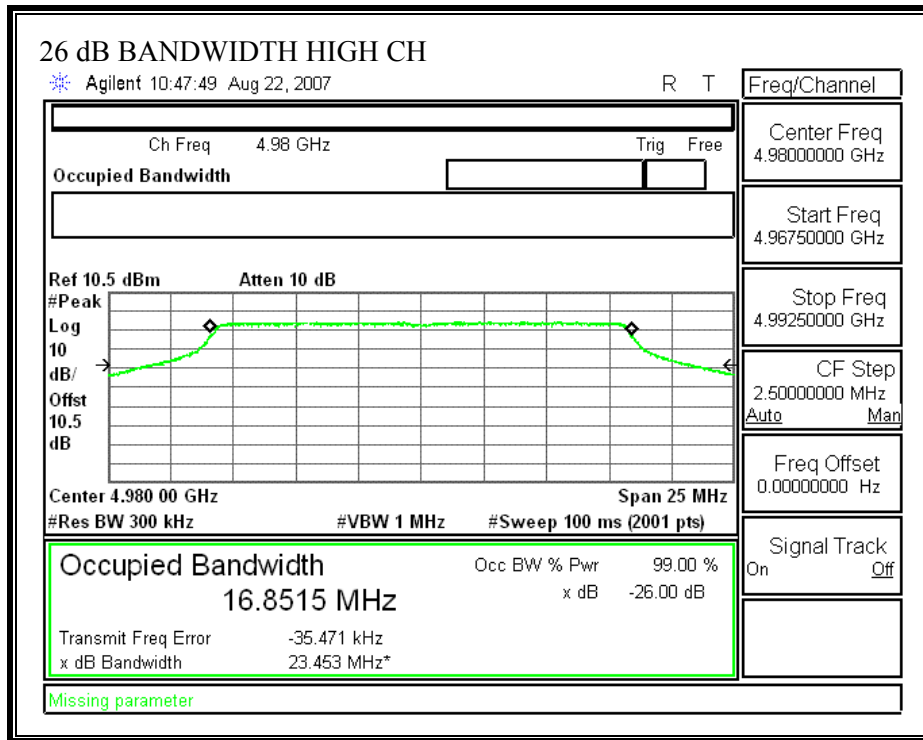

### 7.1.2. PEAK OUTPUT POWER

#### PEAK POWER LIMIT

§ 90.1215 The transmitting power of stations operating in the 4940–4990 MHz band must not exceed the maximum limits in this section.

(a) The peak transmit power should not exceed:

Channel bandwidth (MHz)	Low power Device Peak transmitter Power (dBm)	High power Device Peak transmitter Power (dBm)
1.....	7	20
5.....	14	27
10.....	17	30
15.....	18.8	31.8
20.....	20	33

High power devices are also limited to a peak power spectral density of 21 dBm per one MHz. High power devices using channel bandwidths other than those listed above are permitted; however, they are limited to a peak power spectral density of 21 dBm/MHz. If transmitting antennas of directional gain greater than 9 dBi are used, both the peak transmit power and the peak power spectral density should be reduced by the amount in decibels that the directional gain of the antenna exceeds 9 dBi. However, high power point-to-point or point-to-multipoint operation (both fixed and temporary-fixed rapid deployment) may employ transmitting antennas with directional gain up to 26 dBi without any corresponding reduction in the transmitter power or spectral density. Corresponding reduction in the peak transmit power and peak power spectral density should be the amount in decibels that the directional gain of the antenna exceeds 26 dBi

#### TEST PROCEDURE

The test is performed using peak power spectral integration.


#### RESULTS


No non-compliance noted:

The limit is 12dBm as the antenna gain is 17dBi.


Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	4945	11.86	12	-0.14
Middle	4965	11.89	12	-0.11
High	4985	11.88	12	-0.12

**OUTPUT POWER (802.11a MODE)**

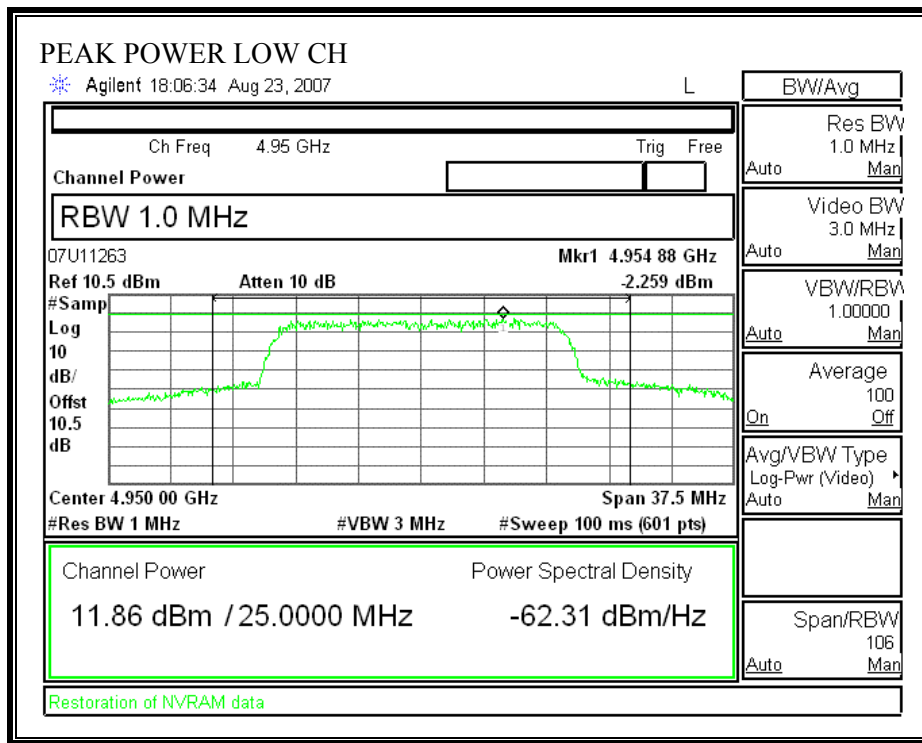

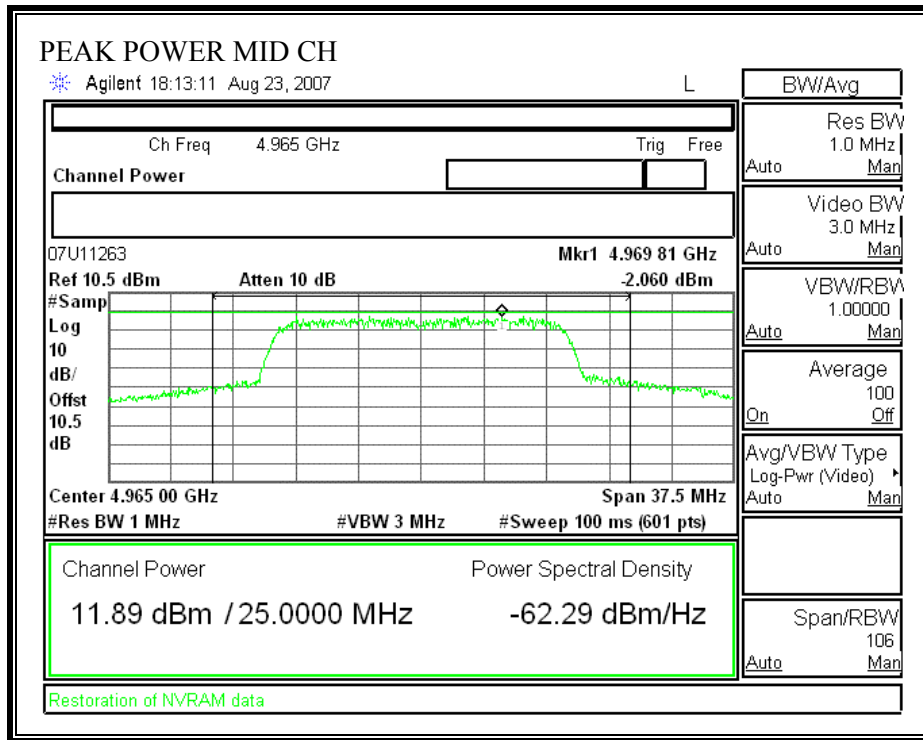



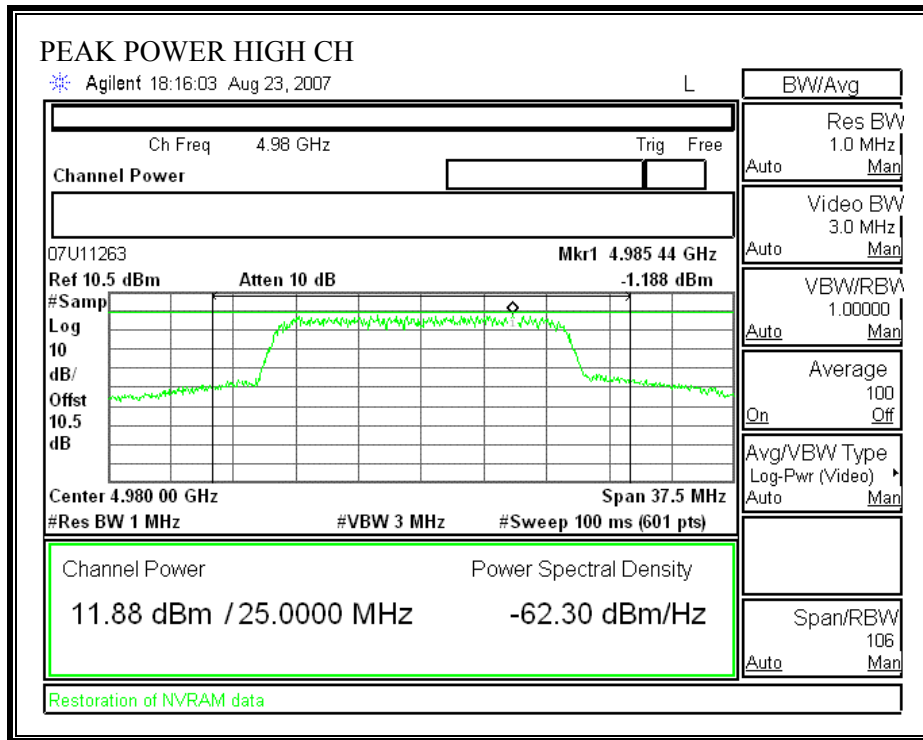

### 7.1.3. MAXIMUM PERMISSIBLE EXPOSURE

#### LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0 .....	614	1.63	*(100)	6
3.0–30 .....	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30–300 .....	61.4	0.163	1.0	6
300–1500 .....	.....	.....	f/300	6
1500–100,000 .....	.....	.....	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34 .....	614	1.63	*(100)	30
1.34–30 .....	824/f	2.19/f	*(180/f <sup>2</sup> )	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
30–300 .....	27.5	0.073	0.2	30
300–1500 .....	.....	.....	f/1500	30
1500–100,000 .....	.....	.....	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

## **CALCULATIONS**

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of Power to mW and Distance to cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = 100 * d \text{ (m)}$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm<sup>2</sup>

Substituting the logarithmic form of power and gain using:

$$P \text{ (mW)} = 10^{(P \text{ (dBm)} / 10)} \text{ and}$$

$$G \text{ (numeric)} = 10^{(G \text{ (dBi)} / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm<sup>2</sup>

Rearranging terms to calculate the power density at a specific distance yields

$$S = 0.0795 * 10^{((P + G) / 10)} / (d^2)$$

**LIMITS**

From §1.1310 Table 1 (B), the maximum value of  $S = 1.0 \text{ mW/cm}^2$

**RESULTS**

No non-compliance noted:

<b>Mode</b>	<b>MPE Distance (cm)</b>	<b>Output Power (dBm)</b>	<b>Antenna Gain (dBi)</b>	<b>Power Density (mW/cm<sup>2</sup>)</b>
5 MHz Channel BW	20.0	11.89	17.00	0.1539

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

## 7.1.4. AVERAGE POWER

### AVERAGE POWER LIMIT

None; for reporting purposes only.

### TEST PROCEDURE

The transmitter output is connected to a power meter.

### RESULTS

No non-compliance noted:

The cable assembly insertion loss of 10.5 dB (including 10 dB pad and 0.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	4945	11.59
Middle	4965	11.67
High	4985	11.63

### 7.1.5. PEAK POWER SPECTRAL DENSITY

#### LIMIT

§ 90.1215 (b) Low power devices are also limited to a peak power spectral density of 8 dBm per one MHz. Low power devices using channel bandwidths other than those listed above are permitted; however, they are limited to a peak power spectral density of 8 dBm/MHz. If transmitting antennas of directional gain greater than 9 dBi are used, both the peak transmit power and the peak power spectral density should be reduced by the amount in decibels that the directional gain of the antenna exceeds 9 dBi..

(c) The peak power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A resolution bandwidth less than the measurement bandwidth can be used, provided that the measured power is integrated to show total power over the measurement bandwidth. If the resolution bandwidth is approximately equal to the measurement bandwidth, and much less than the emission bandwidth of the equipment under test, the measured results shall be corrected to account for any difference between the resolution bandwidth of the test instrument and its actual noise bandwidth.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer, the maximum level in a 1 MHz bandwidth is measured with the spectrum analyzer using RBW = 1 MHz and VBW 3 MHz. The PPSD is the highest level found across the emission in any 1 MHz band.


#### RESULTS


No non-compliance noted:

The limit is 0dBm as the antenna gain is 17dBi.


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	4950	-2.259	0	-2.259
Middle	4965	-2.060	0	-2.060
High	4980	-1.188	0	-1.188

**PEAK POWER SPECTRAL DENSITY**

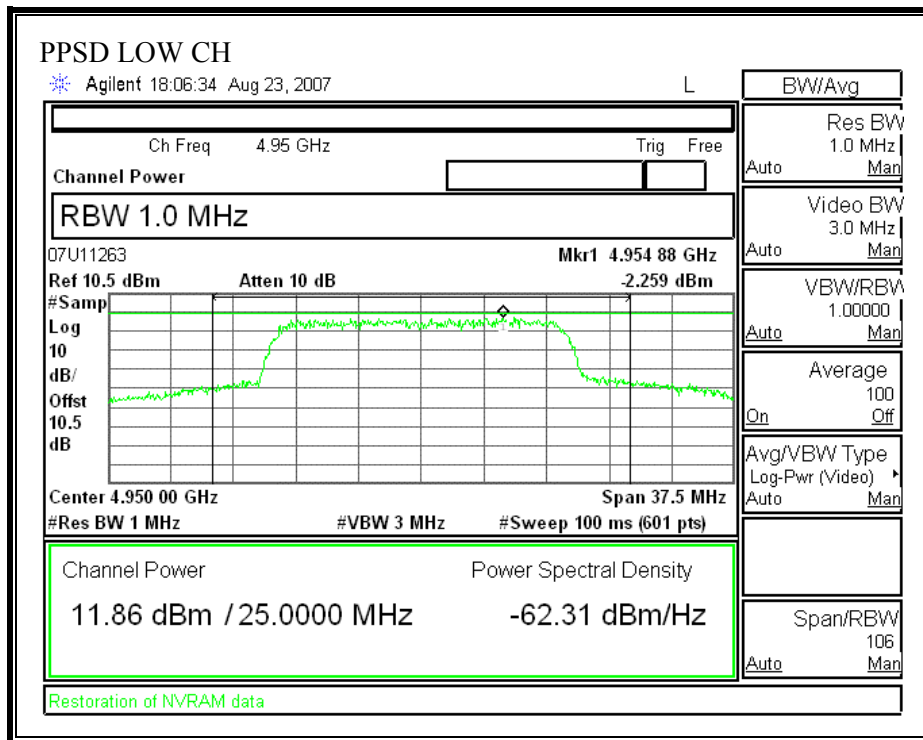

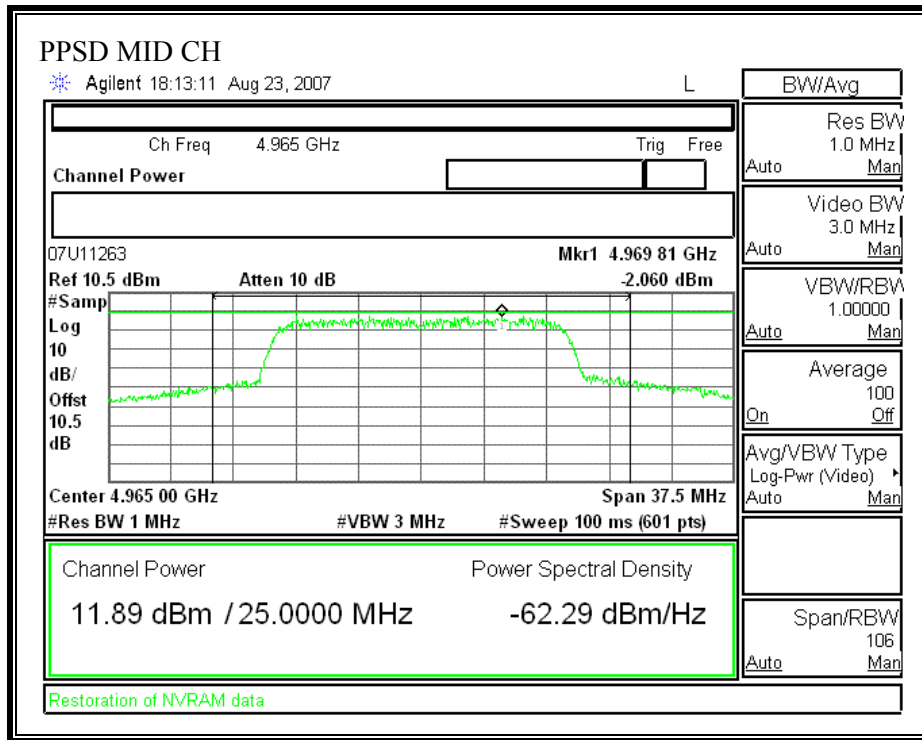



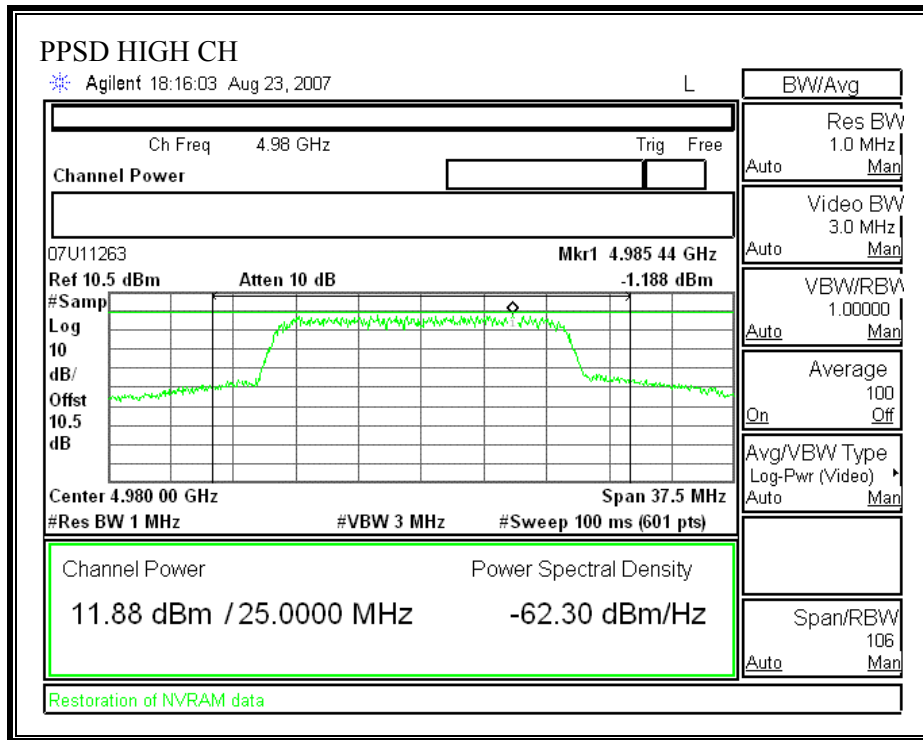

### 7.1.6. EMISSION MASK AND CONDUCTED SPURIOUS

§ 90.210 (l) Emission Mask L. For low power transmitters (20 dBm or less) operating in the 4940–4990 MHz frequency band, the power spectral density of the emissions must be attenuated below the output power of the transmitter as follows:


- (1) On any frequency removed from the assigned frequency between 0–45% of the authorized bandwidth (BW): 0 dB.
- (2) On any frequency removed from the assigned frequency between 45–50% of the authorized bandwidth:  $219 \log (\% \text{ of (BW)/45})$  dB.
- (3) On any frequency removed from the assigned frequency between 50–55% of the authorized bandwidth:  $10 + 242 \log (\% \text{ of (BW)/50})$  dB.
- (4) On any frequency removed from the assigned frequency between 55–100% of the authorized bandwidth:  $20 + 31 \log (\% \text{ of (BW)/55})$  dB attenuation.
- (5) On any frequency removed from the assigned frequency between 100–150% of the authorized bandwidth:  $28 + 68 \log (\% \text{ of (BW)/100})$  dB attenuation.
- (6) On any frequency removed from the assigned frequency above 150% of the authorized bandwidth: 40 dB.
- (7) The zero dB reference is measured relative to the highest average power of the fundamental emission measured across the designated channel bandwidth using a resolution bandwidth of at least one percent of the occupied bandwidth of the fundamental emission and a video bandwidth of 30 kHz. The power spectral density is the power measured within the resolution bandwidth of the measurement device divided by the resolution bandwidth of the measurement device. Emission levels are also based on the use of measurement instrumentation employing a resolution bandwidth of at least one percent of the occupied bandwidth.


### **TEST PROCEDURE**


The EUT is connected to the spectrum analyzer, the peak amplitude is used as the 0 dB reference value for the mask, and the trace is compared to the mask.


### **RESULTS**


No non-compliance noted:

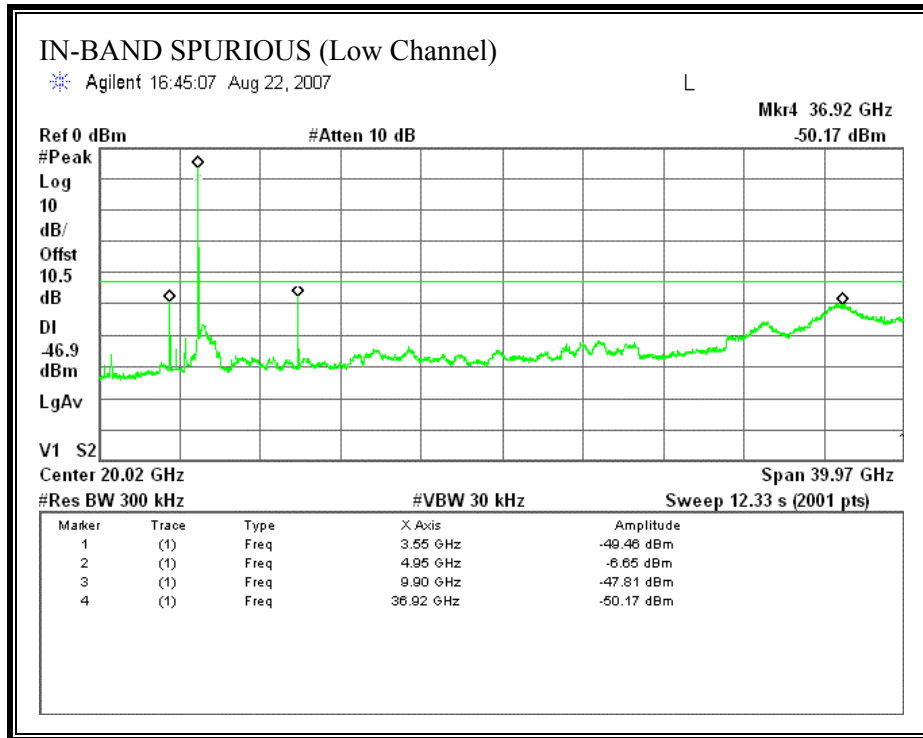


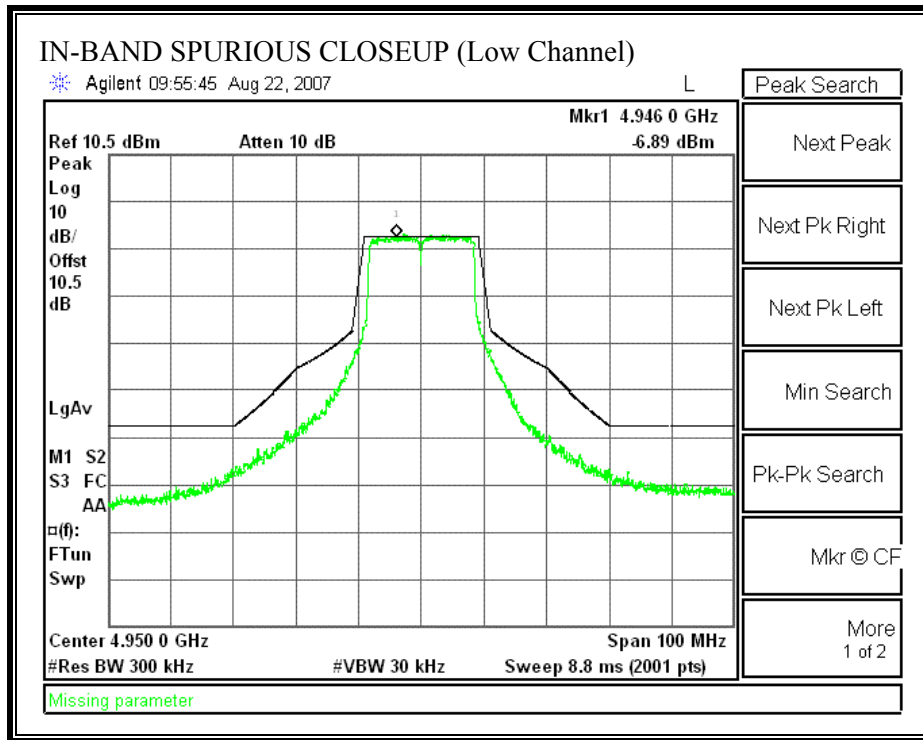

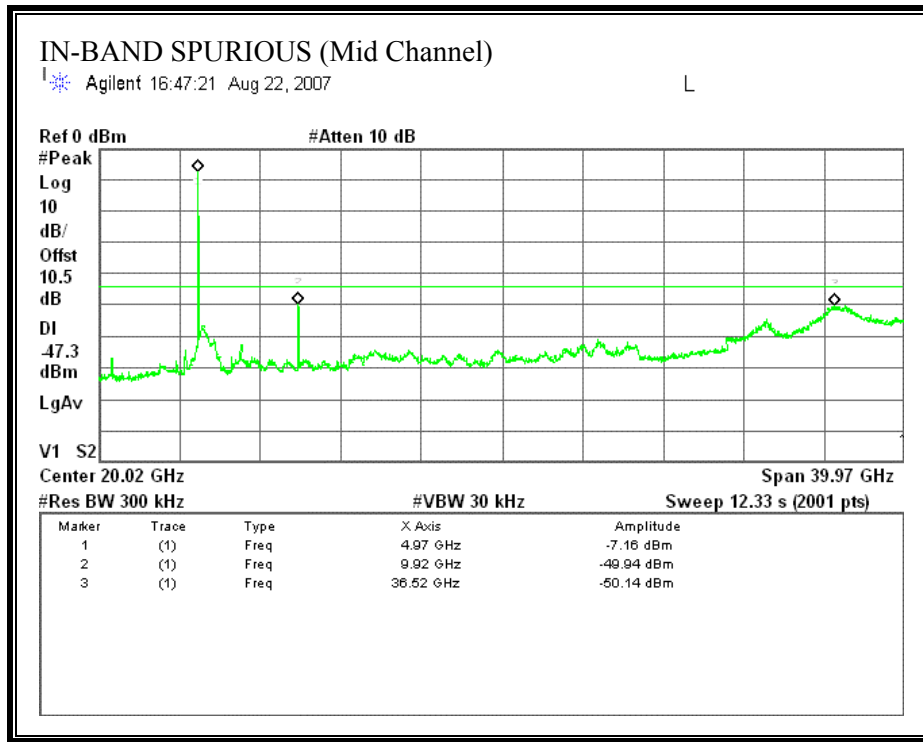

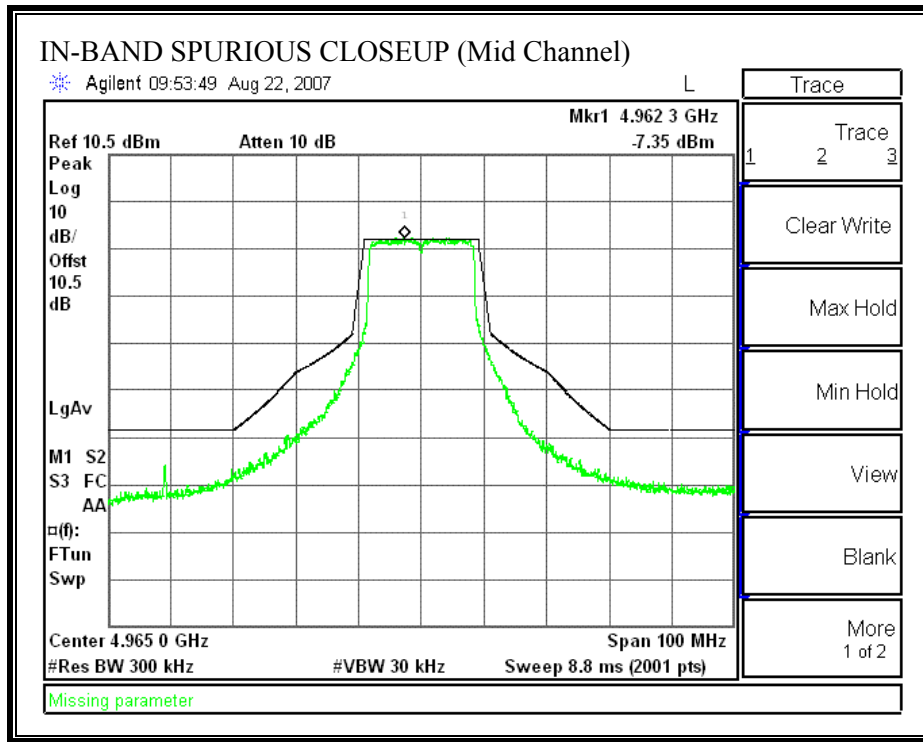

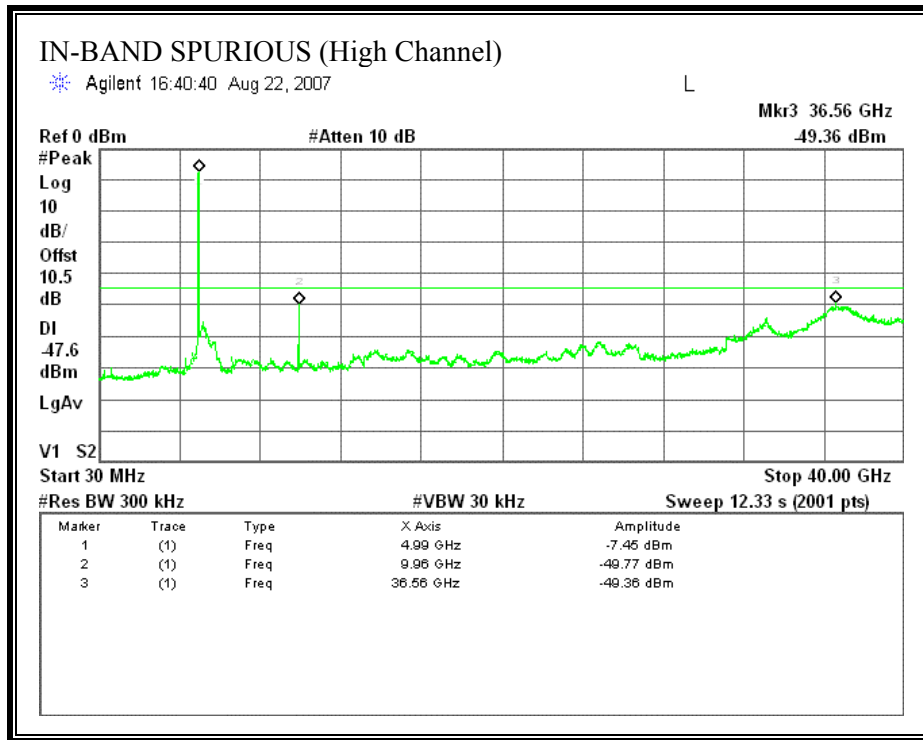

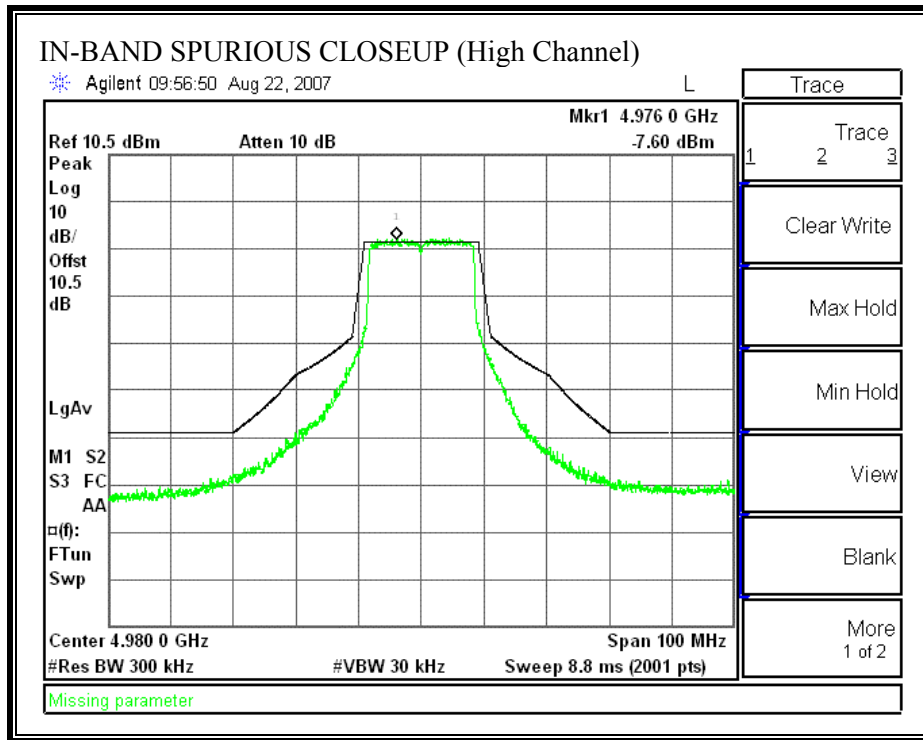



## 7.2. RADIATED EMISSIONS

### 7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

#### LIMITS

§ 90.210 (l) Emission Mask L. For low power transmitters (20 dBm or less) operating in the 4940–4990 MHz frequency band, the power spectral density of the emissions must be attenuated below the output power of the transmitter as follows:

On any frequency removed from the assigned frequency above 150% of the authorized bandwidth: 40 dB.

The zero dB reference is measured relative to the highest average power of the fundamental emission measured across the designated channel bandwidth using a resolution bandwidth of at least one percent of the occupied bandwidth of the fundamental emission and a video bandwidth of 30 kHz. The power spectral density is the power measured within the resolution bandwidth of the measurement device divided by the resolution bandwidth of the measurement device. Emission levels are also based on the use of measurement instrumentation employing a resolution bandwidth of at least one percent of the occupied bandwidth.

§15.109 (a) Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

## **TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

The field strength of the fundamental is measured to provide a reference value for the -40 dBc limit. All measurements are peak.

The resolution bandwidth is set to 1 MHz, and the video bandwidth is set to 1 MHz for peak measurements.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels. Conducted measurements are made of spurious signals removed by less than 150% of the authorized bandwidth. Conducted and radiated measurements are made of spurious signals removed by more than 150% of the authorized bandwidth.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

## 7.2.2. TRANSMITTER ABOVE 1 GHz

### HARMONICS AND SPURIOUS EMISSIONS (WITH 50 OHM LOADS)

**High Frequency Substitution Measurement**  
 Compliance Certification Services, Fremont 5m A-Chamber

Company: Skypilot Networks  
 Project #: 07U11263  
 Date: 08/23/07  
 Test Engineer: Keith Ng  
 Configuration: EUT only (Controlled by laptop placed outside chamber)  
 Mode: Tx

**Test Equipment:**

EMCO Horn 1-18GHz

T73; S/N: 6717 @3m

Horn > 18GHz

Limit

EIRP

High Pass Filter

Hi Frequency Cables

(2 ft)  (2~3 ft)  (4~6 ft)  (12 ft)

Pre-amplifier 1-26GHz

T145 Agilent 3008A

Pre-amplifier 26-40GHz

f GHz	SA reading (dBuV/m)	Ant. Pol. (H/V)	SG reading (dBm)	CL (dB)	Gain (dBi)	Gain (dBd)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
<b>LO CH (4950MHz)</b>										
1.200	31.0	H	-77.4	3.3	6.9	4.7	-73.7	-46.9	-26.9	
3.550	32.8	H	-65.9	5.8	9.7	7.6	-62.0	-46.9	-15.1	
5.250	25.0	H	-67.4	7.2	11.0	8.8	-63.7	-46.9	-16.8	
7.380	32.0	H	-58.5	8.3	12.5	10.4	-54.2	-46.9	-7.3	
9.900	25.0	H	-63.3	10.0	13.3	11.2	-59.9	-46.9	-13.1	
1.200	31.2	V	-77.9	3.3	6.9	4.7	-74.3	-46.9	-27.4	
1.880	35.0	V	-71.0	4.1	8.5	6.4	-66.6	-46.9	-19.7	
3.550	29.0	V	-69.8	5.8	9.7	7.6	-65.9	-46.9	-19.0	
5.280	24.5	V	-68.9	7.3	11.0	8.8	-65.2	-46.9	-18.3	
7.380	36.0	V	-55.3	8.3	12.5	10.4	-51.0	-46.9	-4.1	
9.900	30.0	V	-58.3	10.0	13.3	11.2	-54.9	-46.9	-8.1	
<b>MID CH (4965MHz)</b>										
1.200	30.0	H	-78.4	3.3	6.9	4.7	-74.7	-47.4	-27.4	
5.220	26.1	H	-66.3	7.2	10.9	8.8	-62.6	-47.4	-15.3	
7.380	31.5	H	-59.0	8.3	12.5	10.4	-54.7	-47.4	-7.4	
9.920	23.9	H	-64.4	10.0	13.3	11.2	-61.0	-47.4	-13.7	
1.200	32.6	V	-76.5	3.3	6.9	4.7	-72.9	-47.4	-25.5	
1.880	34.2	V	-71.8	4.1	8.5	6.4	-67.4	-47.4	-20.0	
5.250	25.5	V	-67.9	7.2	11.0	8.8	-64.2	-47.4	-16.8	
7.380	35.2	V	-56.1	8.3	12.5	10.4	-51.8	-47.4	-4.5	
9.920	31.5	V	-56.8	10.0	13.3	11.2	-53.4	-47.4	-6.1	
<b>HI CH (4980MHz)</b>										
1.200	31.7	H	-76.7	3.3	6.9	4.7	-73.0	-47.6	-25.4	
1.880	33.2	H	-62.2	4.1	8.5	6.4	-57.9	-47.6	-10.3	
5.220	26.9	H	-64.8	7.2	10.9	8.8	-61.1	-47.6	-13.5	
9.960	27.1	H	-61.4	10.0	13.3	11.2	-58.1	-47.6	-10.5	
1.200	32.1	V	-63.5	3.3	6.9	4.7	-59.8	-47.6	-12.2	
1.420	31.3	V	-64.2	3.5	7.4	5.3	-60.4	-47.6	-12.8	
5.250	26.3	V	-65.4	7.2	11.0	8.8	-61.7	-47.6	-14.1	
9.960	30.9	V	-57.3	10.0	13.3	11.2	-54.0	-47.6	-6.4	

Rev. 412.7  
 Note: No other emissions were detected above the system noise floor.

### 7.2.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz

30 - 1000MHz Substitution Measurement										
Compliance Certification Services, Fremont 5m A-Chamber										
Company:Skypilot Networks										
Project #:07U11263										
Date:08/23/07										
Test Engineer:Keith Ng										
Configuration:EUT only (Controlled by laptop placed outside chamber)										
Mode:Tx										
Test Equipment:										
Bilog Antenna		Cable		Pre-amplifier 8447D		Limit				
5m Chamber Sunol Bilog		5m Chamber Cable		T5 8447D		ERP				
f MHz	SA reading (dBuV/m)	Ant. Pol. (H/V)	SG reading (dBm)	CL (dB)	Gain (dBi)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
<b>LO CH (4950MHz)</b>										
79.47	44.7	H	-70.5	1.2	-0.6	-2.8	-74.4	-46.9	-27.5	
104.69	48.5	H	-60.9	1.3	-1.3	-3.5	-65.8	-46.9	-18.9	
155.13	45.5	H	-63.3	1.6	0.8	-1.3	-66.1	-46.9	-19.2	
337.49	39.2	H	-66.3	2.2	6.0	3.9	-64.7	-46.9	-17.8	
560.59	40.3	H	-62.7	2.8	6.6	4.5	-61.0	-46.9	-14.2	
890.39	29.8	H	-68.0	3.6	6.7	4.6	-67.0	-46.9	-20.1	
30.00	37.7	V	-66.1	0.9	-19.4	-21.5	-88.5	-46.9	-41.6	
104.69	47.7	V	-61.8	1.3	-1.3	-3.5	-66.6	-46.9	-19.7	
153.19	45.1	V	-63.0	1.6	0.7	-1.5	-66.1	-46.9	-19.2	
560.59	36.8	V	-65.9	2.8	6.6	4.5	-64.2	-46.9	-17.3	
887.48	24.4	V	-73.0	3.6	6.7	4.6	-72.0	-46.9	-25.1	
<b>MID CH (4965MHz)</b>										
104.69	48.4	H	-61.1	1.3	-1.3	-3.5	-65.9	-47.4	-18.6	
155.13	45.4	H	-63.4	1.6	0.8	-1.3	-66.3	-47.4	-19.0	
337.49	39.2	H	-66.4	2.2	6.0	3.9	-64.7	-47.4	-17.3	
557.68	37.8	H	-65.2	2.8	6.6	4.5	-63.6	-47.4	-16.2	
890.39	28.0	H	-69.7	3.6	6.7	4.6	-68.8	-47.4	-21.4	
999.03	26.5	H	-69.9	3.8	7.0	4.8	-68.9	-47.4	-21.6	
30.00	37.8	V	-66.0	0.9	-19.4	-21.5	-88.4	-47.4	-41.1	
104.69	4.5	V	-104.9	1.3	-1.3	-3.5	-109.8	-47.4	-62.4	
155.13	45.5	V	-62.7	1.6	0.8	-1.3	-65.6	-47.4	-18.3	
560.59	36.1	V	-66.6	2.8	6.6	4.5	-64.9	-47.4	-17.6	
890.39	25.8	V	-71.5	3.6	6.7	4.6	-70.6	-47.4	-23.2	
1000.00	25.6	V	-70.8	3.8	7.0	4.8	-69.8	-47.4	-22.4	
<b>HI CH (4980MHz)</b>										
80.44	46.9	H	-67.7	1.2	-0.5	-2.7	-71.6	-47.6	-24.0	
104.69	48.4	H	-61.1	1.3	-1.3	-3.5	-65.9	-47.6	-18.3	
153.19	44.9	H	-63.9	1.6	0.7	-1.5	-66.9	-47.6	-19.3	
332.64	39.6	H	-66.0	2.2	6.0	3.9	-64.3	-47.6	-16.7	
560.59	37.7	H	-65.3	2.8	6.6	4.5	-63.7	-47.6	-16.1	
890.39	30.7	H	-67.1	3.6	6.7	4.6	-66.1	-47.6	-18.5	
30.00	36.3	V	-67.5	0.9	-19.4	-21.5	-89.9	-47.6	-42.3	
104.69	46.1	V	-63.3	1.3	-1.3	-3.5	-68.2	-47.6	-20.6	
155.13	43.6	V	-64.6	1.6	0.8	-1.3	-67.5	-47.6	-19.9	
560.59	32.3	V	-70.4	2.8	6.6	4.5	-68.7	-47.6	-21.1	
778.84	27.2	V	-72.4	3.3	6.7	4.6	-71.2	-47.6	-23.6	
890.39	25.3	V	-72.0	3.6	6.7	4.6	-71.1	-47.6	-23.5	

Rev. 4.29.7

### **7.3. FREQUENCY STABILITY**

#### **LIMIT**

§ 90.213 (a) Unless noted elsewhere, transmitters used in the services governed by this part must have a minimum frequency stability as specified in the following table (See FCC § 90.1215 rules for table).

Above 2450 MHz: Frequency stability to be specified in the station authorization.

For equipment authorization purposes, this is a reporting requirement only.

#### **TEST PROCEDURE**

ANSI / TIA / EIA 603 Clause 2.3.1 and 2.3.2

#### **RESULTS**

No non-compliance noted:

**NORMAL VOLTAGE EXTREME TEMPERATURE RESULTS**

Temp. Celsius	Channel Frequency (MHz)	Measured Frequency (MHz)	Delta Frequency (kHz)	ppm
-30	4965.002113	4965.034145	32.03	-6.45
-20	4965.002113	4965.022195	20.08	-4.04
-10	4965.002113	4965.021765	19.65	-3.96
0	4965.002113	4965.022045	19.93	-4.01
10	4965.002113	4965.023239	21.13	-4.25
20	4965.002113	4965.022913	20.80	-4.19
30	4965.002113	4965.022637	20.52	-4.13
40	4965.002113	4965.020737	18.62	-3.75
50	4965.002113	4965.021269	19.16	-3.86

**LOW VOLTAGE NORMAL TEMPERATURE RESULTS**

Temp. Celsius	Channel Frequency (MHz)	Measured Frequency (MHz)	Delta Frequency (kHz)	ppm
20	4965	4965.021821	21.82	-4.39

**HIGH VOLTAGE NORMAL TEMPERATURE RESULTS**

Temp. Celsius	Channel Frequency (MHz)	Measured Frequency (MHz)	Delta Frequency (kHz)	ppm
20	4965	4965.022457	22.46	-4.52

## 7.4. POWERLINE CONDUCTED EMISSIONS

### LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.

### RESULTS


No non-compliance noted:

**6 WORST EMISSIONS**

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Class	Limit	EN_B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.16	54.60		44.33	0.00	65.73	55.73	-65.73	-11.40	L1
0.42	42.26		38.82	0.00	57.43	47.43	-57.43	-8.61	L1
0.47	40.57		37.26	0.00	56.50	46.50	-56.50	-9.24	L1
0.16	53.81		41.23	0.00	65.67	55.67	-65.67	-14.44	L2
0.42	45.98		37.24	0.00	57.47	47.47	-57.47	-10.23	L2
0.47	45.08		35.78	0.00	56.50	46.50	-56.50	-10.72	L2
6 Worst Data									



**LINE 1 RESULTS**

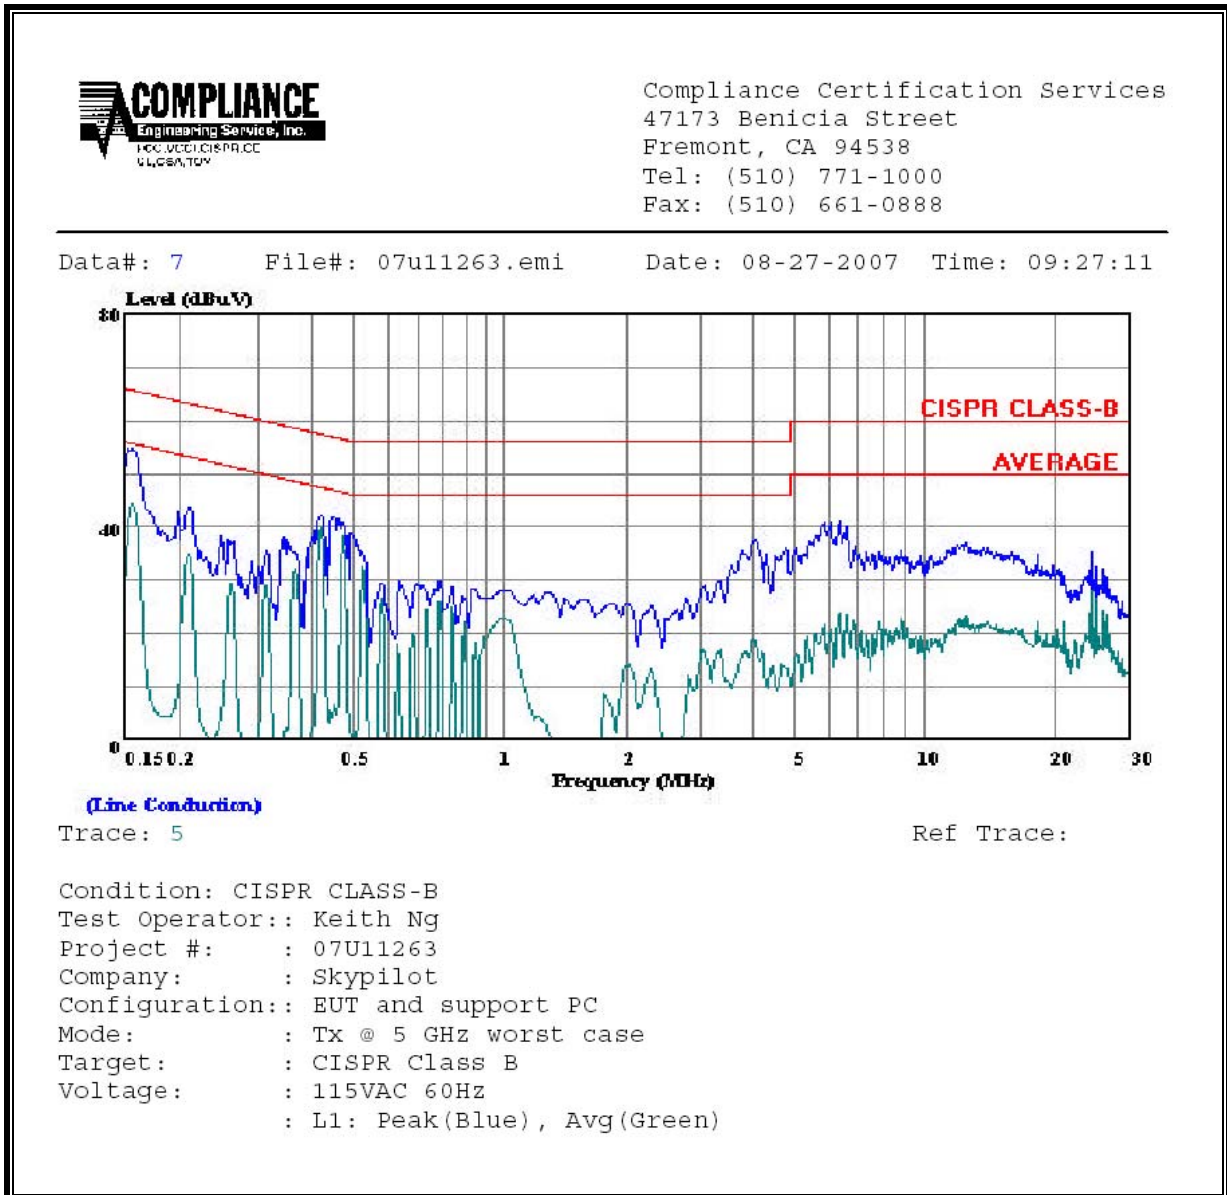

**LINE 2 RESULTS**

