



ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test report file number : E049R-011

Applicant : Chois Technology Co., Ltd.

Address : Swen Daelim Bldg., Suite 1301, 592-5, Dohwa-Dong, Nam-Gu, Incheon, Korea

Manufacturer : Chois Technology Co., Ltd.

Address : Swen Daelim Bldg., Suite 1301, 592-5, Dohwa-Dong, Nam-Gu, Incheon, Korea

Type of Equipment : X-Pointer (TX)

FCC ID : RVBXPT200F

Model Name : XPT200

Multiple Model Name : N/A

Serial number : N/A

Total page of Report : 12 pages (including this page)

Date of Incoming : July 5, 2004

Date of Issuing : September 3, 2004

SUMMARY

The equipment complies with the requirements of **FCC CFR 47 PART 15 SUBPART C, SECTION 15.231**.

This test report contains only the result of a single test of the sample supplied for the examination.

It is not a general valid assessment of the features of the respective products of the mass-production.

Prepared by: G. W. Lee
G. W. Lee/ Chief Engineer
EMC Div.
ONETECH Corp.

Reviewed by: Y. K. Kwon
Y. K. Kwon/ Director
EMC Div.
ONETECH Corp.



CONTENTS

	Page
1. VERIFICATION OF COMPLIANCE	3
2. GENERAL INFORMATION	4
2.1 PRODUCT DESCRIPTION	4
2.2 MODEL DIFFERENCES:	4
2.3 RELATED SUBMITTAL(S) / GRANT(S)	4
2.4 TEST SYSTEM DETAILS	4
2.5 TEST METHODOLOGY	4
2.6 TEST FACILITY	4
3. SYSTEM TEST CONFIGURATION	5
3.1 JUSTIFICATION	5
3.2 EUT EXERCISE SOFTWARE	5
3.3 EQUIPMENT MODIFICATIONS	5
3.4 CONFIGURATION OF TEST SYSTEM	5
3.5 ANTENNA REQUIREMENT	6
4. PRELIMINARY TEST	6
4.1 AC POWER LINE CONDUCTED EMISSIONS TESTS	6
4.2 RADIATED EMISSIONS TESTS	6
5. FINAL RESULT OF MEASUREMENT	7
5.1 MAXIMUM MODULATION PERCENTAGE (MMP)	ERROR! BOOKMARK NOT DEFINED.
5.2 FIELD STRENGTH OF THE CARRIER TEST	7
5.3 SPURIOUS EMISSION TEST	8
5.4 BANDWIDTH OF THE OPERATING FREQUENCY	9
6. FIELD STRENGTH CALCULATION	11
7. LIST OF TEST EQUIPMENT	12



1. VERIFICATION OF COMPLIANCE

- APPLICANT : Chois Technology Co., Ltd.
- ADDRESS : Swen Daelim Bldg., Suite 1301, 592-5, Dohwa-Dong, Nam-Gu, Incheon, Korea
- CONTACT PERSON : Mr. Jong-Chul, Shin / Team Director
- TELEPHONE NO : +82-32-246-3404
- FCC ID : RVBXPT200F
- MODEL NO/NAME : XPT200
- SERIAL NUMBER : N/A
- DATE : September 3, 2004

DEVICE TYPE	X-Pointer (TX) - Transmitter
E.U.T. DESCRIPTION	LASER POINTER AND A PC REMOTE CONTROL - TRANSMITTER
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	ANSI C63.4: 2001
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C, Section 15.231
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 METER OPEN AREA TEST SITE

The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.



2. GENERAL INFORMATION

2.1 Product Description

The Chois Technology Co., Ltd., Model XPT200F (referred to as the EUT in this report) is a X-Pointer that is a laser pointer and a PC remote control. The associated receiver is manufactured by Chois Technology Co., Ltd., Model No: XPR200F, FCC ID: RVBXPR200F. The product specification described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	Non-Metal
TX FREQUENCY	433.92 MHz
MODULATION	FSK
LIST OF EACH OSC. OR CRY. FREQ.(FREQ.>=1MHz)	48.213333 MHz
ANTENNA TYPE	Built-in on the PCB in the EUT
TRANSMISSION TIME	Not longer than 1 sec
RATED SUPPLY VOLTAGE	DC 3V, 980mA (AAA Type Battery)
NUMBER OF LAYERS	2 LAYERS
FUNCTION OF BUTTON	Page Up/Down, Arrow Up/Down, Left/Right Click, Laser Keyboard/Mouse Mode Switching

Remark: This equipment automatically deactivates the transmitter within not more than 1 second of being released.

2.2 Model Differences:

The difference(s) compared to the EUT is as follows: none

2.3 Related Submittal(s) / Grant(s)

- None

2.4 Test System Details

The EUT was tested with the following all equipment used in the tested systems are: none

2.5 Test Methodology

Radiated testing was performed according to the procedures in ANSI C63.4: 2001. Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

2.6 Test Facility

The open area test site and conducted measurement facilities are located on at 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Kyunggi-Do 464-080 Korea. Description details of test facilities were submitted to the Commission on January 18, 2002. (Registration Number: 92819)



3. SYSTEM TEST CONFIGURATION

3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
MAIN BOARD	Chois Technology Co., Ltd.	N/A	N/A

3.2 EUT exercise Software

To get a maximum radiated emission from the EUT, the button on the EUT was continuously pressed to transmit the signal. During the testing, the battery of the EUT was changed with a new battery.

3.3 Equipment Modifications

- None

3.4 Configuration of Test System

Line Conducted Test: It needs not to test this requirement, because the EUT is operated by batteries.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.4: 2001 8.3.1.1 and 13.1.4.1 to determine the worse operating conditions. Final radiated emission tests were conducted at 3meter open area test site.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

Occupied Bandwidth Measurement:

This measurement is performed with the antenna located close enough to give a full-scale deflection of the modulated carrier on the spectrum analyzer. The picture is taken at 20 kHz/division frequency span, 10 kHz resolution bandwidth and 10dB/division logarithmic display from an 8566B spectrum analyzer.



3.5 Antenna Requirement

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The transmitter antenna of the EUT is built-in on the PCB in the EUT, no consideration of replacement by the user.

4. PRELIMINARY TEST

4.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
N/A	N/A
It is not need to test this requirement, because the power of the EUT is supplied from DC batteries.	

4.2 Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
TX mode	X



5. FINAL RESULT OF MEASUREMENT

5.1 Field Strength of the Carrier Test

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Humidity Level : 55 % Temperature: 28 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.231(b)
 Type of Test : Transmitter
 Result : PASSED BY -0.84 dB at Peak Mode

EUT : X-Pointer (TX) Date: September 1, 2004
 Operating Condition : TX mode
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)
 Distance : 3 Meter

Radiated Emissions			Ant	Correction Factors		Total (dBuV/m)		Limit (dBuV/m)	Margin (dB)	
Carrier Freq. (MHz)	Pk Rdg (dBuV)	Av Rdg (dBuV)	Pol.	Ant. (dB/m)	Cable (dB)	Peak	Average		Peak	Average
433.92	59.90	51.20	H	16.61	3.47	79.98	71.28	80.82	-0.84	-9.54
433.92	46.60	37.90	V	16.61	3.47	66.68	57.98	80.82	-14.14	-22.84

Remark: To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

기홍

Tested by: G. H. Nam / Test Engineer



5.2 Spurious Emission Test

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Humidity Level : 55 % Temperature: 28 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.231(b)
 Type of Test : Transmitter
 Result : PASSED BY -11.37dB at 867.81 MHz

EUT : X-Pointer (TX) Date: September 1, 2004
 Operating Condition : TX mode
 Detector : Below 1GHz, Quasi-Peak/Peak (RBW: 120 kHz)
 Above 1GHz, Average/Peak (RBW: 1MHz)
 Distance : 3 Meter

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit(dBuV/m)	
Freq. (MHz)	Pk Rdg (dBuV)	AV Rdg (dBuV)	Pol.	Antenna (dB/m)	Cable Loss (dB)	Amp. at Peak (dBuV/m)	Limit	Margin (dB)
385.66	19.70	9.70	H	15.44	3.37	38.51	60.82	-22.31
482.14	13.40	10.50	H	17.42	3.61	34.43	60.82	-26.39
867.81	21.50	12.50	H	22.98	4.97	49.45	60.82	-11.37
1301.72	16.30	6.70	V	24.75	5.33	46.38	60.82	-14.44
Other spurious frequencies were not found up to 4000 MHz.								

Remark: To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

기홍

Tested by: G. H. Nam / Test Engineer



5.4 Bandwidth of the operating frequency

Humidity Level : 46 % Temperature: 19 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.231 (c)
 Type of Test : Transmitter
 Result : PASSED


EUT : X-Pointer (TX) Date: January 16, 2004
 Operating Condition : TX mode
 Minimum Resolution
 Bandwidth : 10 kHz

Carrier Freq. (MHz)	Bandwidth of the emission. (kHz)	Limit (kHz)	Remark
311.0875	35.9 (Refer to next page)	$433.92 \times 0.25\% = 108.48$	<u>The point 20dB down from the modulated carrier</u>

Please refer to next page for pictured graph.

기홍

Tested by: G. H, Nam / Test Engineer

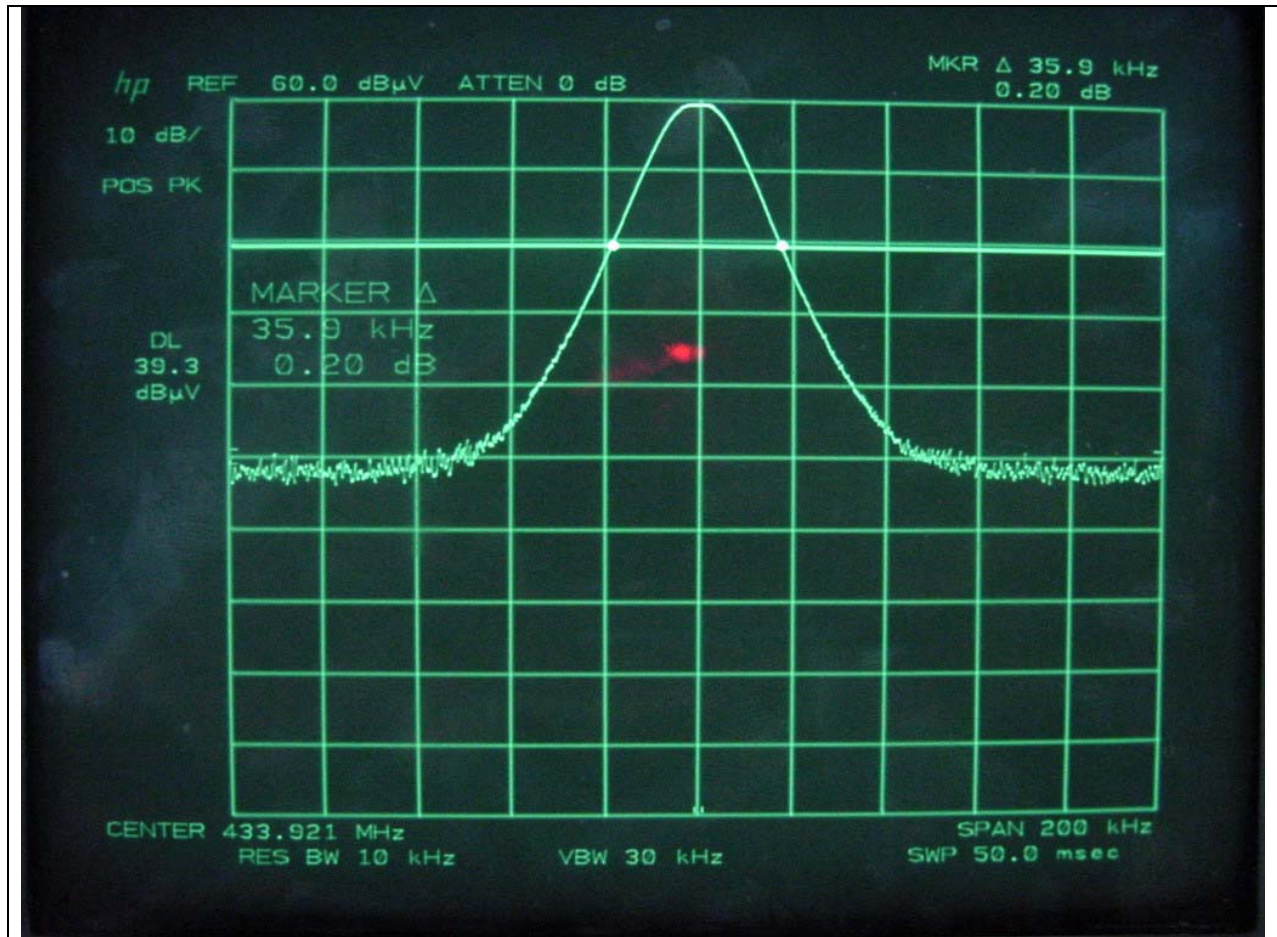



6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

= Corrected Reading (dBuV/meter)

- Specification Limit (dBuV/meter)

= dB Relative to Spec (+/- dB)



7. LIST OF TEST EQUIPMENT

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUE CAL	USE
1.	Test receiver	R/S	ESVS 10	827864/005	DEC/03	12MONTH	■
2.	Test receiver	R/S	ESHS 10	834467/007	MAY/04	12MONTH	■
3.	Spectrum analyzer	HP	8566B	3407A08547	JUL/04	12MONTH	
4.	Spectrum analyzer	HP	8568B	3109A05456	JUL/04	12MONTH	■
5.	RF preselector	HP	85685A	3107A01264	APR/04	12MONTH	■
6.	Quasi-Peak Adapter	HP	85650A	3107A01542	JUL/04	12MONTH	■
7.	TRILOG Broadband Antenna	Schwarzbeck	VULB9163	VULB9163 166	FEB/04	12MONTH	
8.	Biconical antenna	EMCO	3104C	9109-4443	MAY/04	12MONTH	■
		Schwarzbeck	VHA9103	91031852	JAN/04		
9.	Log Periodic antenna	EMCO	3146	9109-3213	FEB/04	12MONTH	
				9109-3217	MAY/04		
		Schwarzbeck	9108-A(494)	62281001	JAN/04		■
10.	LISN	EMCO	3825/2	9109-1867	JUL/04	12MONTH	■
				9109-1869	OCT/03		■
11.	Position Controller	HD GmbH	HD100	N/A	N/A	N/A	■
12.	Turn Table	HD GmbH	DS420S	N/A	N/A	N/A	■
13.	Antenna Master	HD GmbH	MA240	N/A	N/A	N/A	■