



Test report issued under the responsibility of:
EMITECH MONTPELLIER laboratory
MRA US-EU Designation Number: FR0006
Canadian CAB Identifier: FR0003

RADIO TEST REPORT

FCC part 15
FCC part 15.247
RSS-247_Issue 2, February 2017
ANSI C 63.10: 2013
ANSI C 63.4: 2014

Company: **ELA INNOVATION**
Address.....: 297 RUE MAURICE BEJART
34080 MONTPELLIER
FRANCE

Test item description: **BLUE PUCK FAMILY**
Trade Mark: BLUE PUCK FAMILY
Manufacturer: ELA INNOVATION
Model/Type reference.....: IDF25XXX
FCC ID.....: RVVBPUCKPF1
IC: 20429-BPUCKPF1
Ratings.....: 2,6Vdc to 3Vdc

Testing Laboratory: **EMITECH MONTPELLIER laboratory**
Address.....: 145 rue de Massacan
34740 VENDARGUES
FRANCE

Report Reference No.....: **RR410-19-104019-1A**
Test procedure: FCC IC Certification
Diffusion.....: MR LEBRUN
Applicant's name: ELA INNOVATION
Date of issue.....: February 26, 2020
Total number of pages.....: 67
Revision.....: 0
Modified page(s).....: Creation
Compiled by.....: Olivier AELBRECHT
Approved by (+ signature).....: David MONTAULON (Technical Manager)

*Duplication of this test report is only permitted for an integral photographic facsimile. It includes the number of pages referenced here above.
This document is the result of testing a specimen or a sample of the product submitted. It does not imply an assessment of the conformity of
the whole manufactured products of the tested sample.*



REPORT INDEX:

1. GENERAL INFORMATIONS	3
2. REFERENCE DOCUMENT(S).....	4
3. EQUIPMENT TECHNICAL DESCRIPTION	5
3.1. TEST CONDITIONS	5
3.2. EUT MARKING PLATE	5
3.3. EUT GENERAL VIEW	6
3.4. EUT ELECTRONIC BOARD	6
3.5. EUT MECHANICAL AND ELECTRICAL DESIGN.....	7
3.6. EUT INPUT/OUTPUT PORTS.....	7
3.7. EUT RADIO SPECIFICATIONS.....	8
4. EUT REQUIREMENTS FOR FCC RULES	9
4.1. SUBPART A - GENERAL	9
4.2. SUBPART B - UNINTENTIONAL RADIATORS	11
5. OPINION(S) AND INTERPRETATION(S).....	11
6. RESULT SUMMARY	12
7. RF EXPOSURE	12
8. MEASUREMENT UNCERTAINTY	13
9. TEST CONDITIONS AND RESULTS	14
9.1. DUTY CYCLE OF TEST SIGNAL	14
9.2. TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES <30MHZ.....	15
9.3. TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES >30MHZ.....	20
9.4. BAND-EDGE COMPLIANCE	32
9.5. MAXIMUM PEAK CONDUCTED POWER OF THE INTENTIONAL RADIATOR	39
9.6. 20DB & 6DB BANDWIDTH FOR DIGITALLY MODULATION SYSTEMS.....	47
9.7. POWER SPECTRAL DENSITY	55
9.8. OCCUPIED BANDWIDTH	60
9.9. MEASUREMENT OF FREQUENCY STABILITY.....	65

REVISION HISTORY:

Revision	Date	Modified pages	Modifications
0	February 26, 2020	/	Creation

1. GENERAL INFORMATIONS

This document submits the results of Radio tests performed on the equipment **BLUE PUCK FAMILY** (denominated hereafter E.U.T.: equipment under test) according to document(s) listed in §2 of this test report.

TESTING PROCEDURE AND TESTING LOCATION:					
Testing Location : EMITECH MONTPELLIER laboratory					
Address..... : 145 rue de Massacan 34740 VENDARGUES FRANCE					
Test procedure. : FCC IC Certification					
Tested by : Olivier AELBRECHT					
Test supervisor : None					
Date of receipt of test item..... : N/A					
Date (s) of performance of tests..... : From December the 16th to the 18th of 2019					
APPLICANT'S GENERAL INFORMATIONS:					
Company name : ELA INNOVATION					
Company address. : 297 RUE MAURICE BEJART 34080 MONTPELLIER FRANCE					
Person(s) present during the tests. : Mr BIBI					
Responsible..... : MR LEBRUN					
GENERAL REMARKS:					
<p>The information in italics is declared by the manufacturer and is under his responsibility The test results presented in this report relate only to the object tested. The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.</p> <p>"(see Enclosure #)" refers to additional information appended to the report. "(see appended table)" refers to a table appended to the report. Throughout this report the decimal separator is point.</p>					
POSSIBLE TEST CASE VERDICTS:					
Test case does not apply to the test object.. : N/A					
Test case not performed..... : N/P					
Test object does meet the requirement..... : P (Pass)					
Test object does not meet the requirement.. : F (Fail)					
DEFINITIONS AND ABBREVIATIONS:					
E.U.T.	Equipement under test	AE	Ancillary equipment	Pk	Peak detector
RBW	Resolution bandwidth	VBW	Video bandwidth	QP	Quasi-peak detector
OATS	Open area test site	FAR	Full anechoic room	Av	Average detector
VP	Vertical Polarization	HP	Horizontal Polarization	RMS	Root Mean Square
RF	Radio frequency	NTR	Nothing to report	N/C	Not communicated

2. REFERENCE DOCUMENT(S)

NORMATIVE REFERENCES:

The following referenced documents are necessary for the application of the present test report.

FCC part 15

Code of federal regulations. Title 47- Telecommunication Chapter 1- Federal Communication Commission. Part 15- Radio frequency devices Subpart B- Unintentional Radiators. Limits and methods of measurement of radio disturbance. Characteristic of information technology equipment

FCC part 15.247

Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850MHz. (frequency hopping and digitally modulated)

RSS-247_Issue 2, February 2017

Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence Exempt Local Area Network (LE-LAN) Devices

ANSI C 63.10:2013

American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

ANSI C 63.4:2014

American National Standard for Methods of measurement of Radio-Noise from low-voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz W

Although the product standard uses obsolete technical standards, the latest versions of standards achievable by the laboratory will be used for testing.

INFORMATIVE REFERENCES:

The following referenced documents are not necessary for the application of the present test report but they assist the user with regard to a particular subject area.

3. EQUIPMENT TECHNICAL DESCRIPTION

3.1. Test Conditions

Test item description. : BLUE PUCK FAMILY
Model/Type reference..... : IDF25XXX
Trade Mark. : BLUE PUCK FAMILY
Serial number (S/N)..... : Not communicated
Part number (P/N). : Not communicated
Software version..... : N/A
Firmware version. : *Not communicated*
Type of sample. : Pre-serial
Function(s)..... : Depend on business application
Manufacturer name. : ELA INNOVATION
Address..... : 297 rue Maurice BEJART
34080 MONTPELLIER
FRANCE

General product information:

N/A

3.2. EUT Marking plate

During tests the marking plate was not present on EUT.
Hereunder an example of marking plate provided by the customer.



3.3. EUT General view

Front View




Back View




3.4. EUT Electronic board

Front View

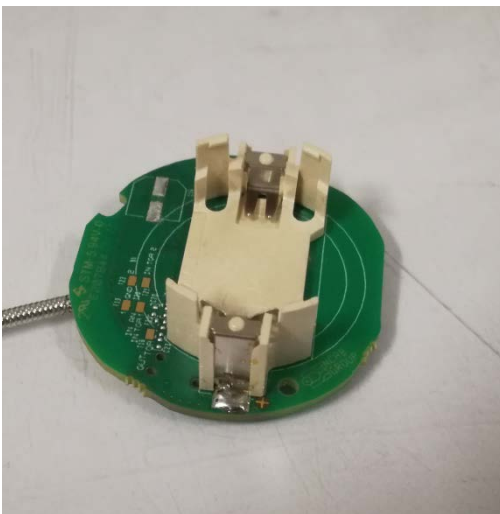

Back View

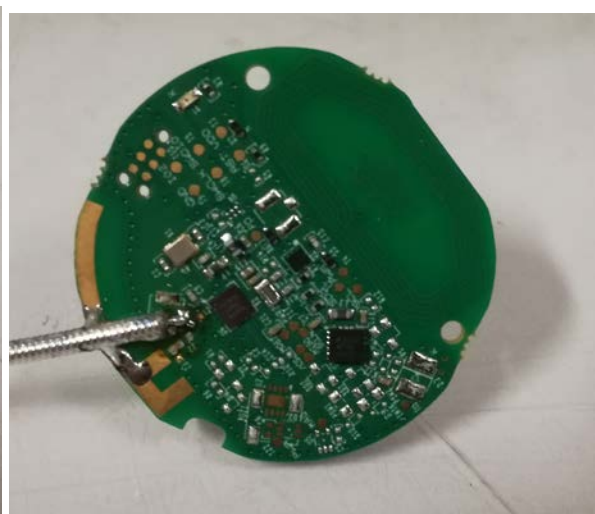


3.5. EUT Mechanical and Electrical Design

Power supply. : 3Vdc
 Power supply range..... : 2,6Vdc to 3Vdc
 Power type..... : Battery
 Power (W)..... : Not communicated
 Nominal current (A). : Not communicated
 Dimensions (L x W x H) (m). : Ø 57 mm base - height 18 mm
 Weight (g)..... : 36g
 Temperature range (°C). : -40°C to +85°C
 Ground bounding strap..... : No

Comments:

N/A

3.6. EUT Input/Output ports

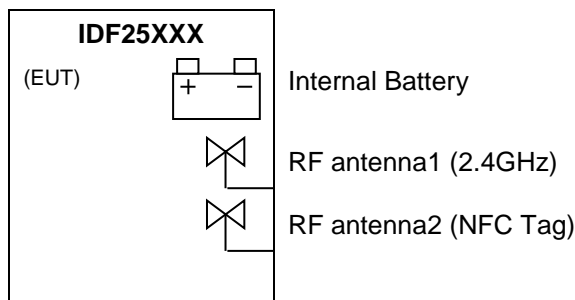

PORT	NAME	TYPE	LENGHT	CABLE TYPE	COMMENTS
0	Main frame	N/E	N/A	Plastic	
1	Internal Battery	DC	N/A	N/A	3Vdc
2	RF antenna 1	RF	N/A	N/A	PCB printed antenna used for QUUPPA and BLUETOOTH
3	RF antenna 2	RF	N/A	N/A	PCB printed antenna used for NFC

AC/DC : AC/DC Converter port
 I/O.....: Input or Output port
 N/E: Non Electrical port

AC.....: Alternative current port
 TP: Telecommunication port

DC.....: Discontinuous current port
 RF.....: Radio frequency port

3.7. EUT Radio Specifications


a) GENERAL INFORMATIONS	
According to manufacturer's declarations :	
EUT type.....	: <i>Transceiver</i>
Technology	: <i>QUUPPA/BLUETOOTH</i>
Environmental profile.....	: <i>Data transmissions</i>
Temperature range.....	: <i>-40°C to +85°C</i>
Antenna type	: <i>Internal Antenna</i>
Antenna Gain.....	: <i>Not communicated</i>
Comments:	
<i>N/A</i>	
b) TRANSMITTER PARAMITERS (Tx)	
Frequency bands	: <i>2400Mhz to 2483.5Mhz</i>
RF Power.....	: <i>+4dBm</i>
Number of channels / Separation.....	: <i>81 channels each 1MHz</i>
Modulation type	: <i>GFSK</i>
Duty cycle	: <i>Not communicated</i>
Tested frequency.....	: <i>2401MHz (Low Channel)</i> <i>2441MHz (Mid Channel)</i> <i>2481MHz (High Channel)</i>
c) RECEIVER PARAMETERS (Rx)	
Frequency bands	: <i>2400Mhz to 2483.5Mhz</i>
Category/Class	: <i>Not communicated</i>
Bandwidth	: <i>Not communicated</i>

4. EUT REQUIREMENTS FOR FCC RULES

4.1. Subpart A - General

This part sets out the regulations under which an intentional, unintentional, or incidental radiator may be operated without an individual license. It also contains the technical specifications, administrative requirements and other conditions relating to the marketing of part 15 devices.

The user notice **Not communicated**, shall include the following informations:

a) LABELING REQUIREMENTS (§15.19):
<p>Equipment authorization: Supplier's Declaration of Conformity (SDoC) or Certification</p> <p>List of different type of devices and associated "<i>statement on product</i>":</p> <p>§15.19(a)(1) - Receivers associated with the operation of a licensed radio service: <i>"This device complies with part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference."</i></p> <p>§15.19(a)(2) - A stand-alone cable input selector switch: <i>"This device complies with part 15 of the FCC Rules for use with cable television service."</i></p> <p>§15.19(a)(3) - All other devices: <i>"This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:</i> (1) <i>This device may not cause harmful interference, and</i> (2) <i>this device must accept any interference received, including interference that may cause undesired operation.</i></p> <p>§15.19(a)(4) - Where a device is constructed in two or more sections connected by wires and marketed together: The statement specified only to the main control unit: <i>"This device complies with part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference."</i></p> <p>§15.19(a)(5) - When the device is so small: The statement of §15.19(a) shall be placed in the user manual and must also either be placed on the device packaging or on a removable label attached to the device.</p> <p>Compliance information (§2.1077): The identification, by name, address and telephone number or internet contact information, of the responsible party, as defined in § 2.909 of the standard. The responsible party for Supplier's Declaration of Conformity must be located within the United States.</p> <p>Identification (§2.1074): (a) Devices subject only to Supplier's Declaration of Conformity shall be uniquely identified by the party responsible for marketing or importing the equipment within the United States. (b) Devices subject to authorization under Supplier's Declaration of Conformity may be labeled with the following logo on a voluntary basis as a visual indication that the product complies with the applicable FCC requirements.</p> <div style="text-align: center;">  <p>(image size: 6.7 x 2.8" ;3.5 x 1.4" ;1.6 x .7")</p> </div>

The label shall be located in a conspicuous location on the device.

The label shall not be a stick-on, paper label. The label on these products shall be permanently affixed to the product and shall be readily visible (font of at least 4-point or larger) to the purchaser at the time of purchase.

EUT LABEL

During tests the marking plate was not present on EUT.
Hereunder an example of marking plate provided by the customer.

**b) INFORMATION TO USER (§15.21):**

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that:
“The grantee is not responsible for any changes or modifications not expressly approved by the party responsible for compliance. Such modifications could void the user’s authority to operate the equipment”

4.2. Subpart B - Unintentional Radiators

In addition to Subpart A, the user notice Not communicated, shall include the following informations:

a) INFORMATION TO USER (§15.105):
<p>Equipment authorization: Supplier's Declaration of Conformity (SDoC) or Certification</p> <p>§15.105(a) - For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:</p> <p><i>“NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.”</i></p> <p>§15.105(b) - For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:</p> <p><i>“NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:</i></p> <ul style="list-style-type: none"> <i>—Reorient or relocate the receiving antenna.</i> <i>—Increase the separation between the equipment and receiver.</i> <i>—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.</i> <i>—Consult the dealer or an experienced radio/TV technician for help.”</i>

5. OPINION(S) AND INTERPRETATION(S)

TEST(S) PERFORMED	DEVIATION(S) TO TEST METHOD(S)
FCC part 15.247 and RSS-247	N/A
FCC part 15.109, 15.209, 15.205, 15.215 RSS-247, RSS Gen	N/A

Comments: N/A

6. RESULT SUMMARY

TEST DESIGNATION	SEVERITY	VERDICT	BASIC STANDARDS / COMMENTS
Conducted emissions Transmitter radiated spurious emissions at frequencies <30MHz - Tx Mode / 0° / All Channels - Tx Mode / 45° / All Channels - Tx Mode / 90° / All Channels Transmitter radiated spurious emissions at frequencies >30MHz - Tx mode - All Channels for Freq < 1Ghz - Tx mode - Low Channel for Freq > 1Ghz - Tx mode - Mid Channel for Freq > 1Ghz - Tx mode - High Channel for Freq > 1Ghz Operation within the band 902-928MHz, 2400-2483.5MHz and 5725-5850MHz - Frequency hopping and digitally modulated - Frequency hopping system - Digital modulation system - Maximum peak conducted output power - For hopping system in the 2400-2483.5 MHz and 5725-5850 MHz bands - For hopping system in the 902-928MHz band - For system using digital modulation in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands - Operation with directional antenna gains > 6 dBi - Out-of-band emissions - Power spectral density conducted - Hybrid system - Frequency hopping additional requirements - Frequency hopping intelligence - RF exposure compliance		N/A PASS PASS PASS PASS PASS PASS PASS - N/A PASS - N/A N/A PASS N/A PASS PASS N/A N/A N/A N/A PASS	Powered by internal batteries ANSI C63.10: 2013 ANSI C63.10: 2013 15.247 / RSS 247 a) a) (1) a) (2) b) b) (1) b) (2) b) (3) / EUT has its dedicated internal PCB antenna, due to this, this measurement was done in radiated. Integral antenna d) e) f) g) h) i)

Sample subject to the test complies for tests done with the requirements of the reference document(s) listed in §2 of this test report and, where applicable, with deviation(s) specified in this document.

To declare, or not, the compliance with the specifications, it was not explicitly taken account of uncertainty associated with the results.

TEST(S) PERFORMED	MODIFICATION(S)
FCC part 15.247 and RSS-247, FCC part 15.109, 15.209 and RSS Gen	N/A

7. RF EXPOSURE

Maximum EIRP with = 3.428 mW (eirp) at 2441MHz

In accordance with KDB 447498 D01 General RF Exposure Guidance v06:

$$PSD = \frac{EIRP}{(4 \cdot \pi \cdot R^2)} = \frac{3.428}{(4 \cdot \pi \cdot (20 \text{ cm})^2)} = 0.001 \text{ mW/cm}^2$$

$$\text{Limit} = 1 \text{ mW/cm}^2$$

8. MEASUREMENT UNCERTAINTY

PARAMETER	MAXIMAL EMITECH UNCERTAINTY	MINIMAL STANDARD UNCERTAINTY
Radio frequency	$\pm 1 \times 10^{-7}$	$\pm 1 \times 10^{-7}$
RF power, conducted		
RF power	$\pm 0.8\text{dB}$	$\pm 1 \text{ dB}$
Power spectral density	$\pm 2.3\text{dB}$	$\pm 3 \text{ dB}$
Occupied bandwidth		
RF power	$\pm 3.8 \%$	$\pm 5 \%$
Maximum frequency deviation		
300 Hz < audio frequency < 6 kHz	$\pm 1.2 \%$	$\pm 5 \%$
6 kHz < audio frequency < 25 kHz	$\pm 1.2 \%$	$\pm 3 \text{ dB}$
Adjacent channel power	$\pm 1.6 \text{ dB}$	$\pm 3 \text{ dB}$
Sensibility of receiver (conducted)	$\pm 2.0 \text{ dB}$	$\pm 3 \text{ dB}$
Blocking	$\pm 4.0 \text{ dB}$	$\pm 4 \text{ dB}$
Transitoire		
Amplitude	$\pm 8.5 \%$	$\pm 20 \%$
At the frequency	$\pm 166 \text{ Hz}$	$\pm 250 \text{ Hz}$
Conducted emission (spurious)		
$f \leq 1 \text{ GHz}$	$\pm 0.8 \text{ dB}$	
1 GHz - 12.75 GHz	$\pm 1.6 \text{ dB}$	$\pm 3 \text{ dB}$
Radiated emission (PAR / PIRE / RNE)		
$f \leq 62.5 \text{ MHz}$	$\pm 5.1 \text{ dB}$	$\pm 6 \text{ dB}$
62.5 MHz - 1 GHz	$\pm 5.1 \text{ dB}$	$\pm 6 \text{ dB}$
1 GHz - 18 GHz	$\pm 5.2 \text{ dB}$	$\pm 6 \text{ dB}$
18 GHz – 26 GHz	$\pm 5.1 \text{ dB}$	$\pm 6 \text{ dB}$
26 GHz – 40 GHz	$\pm 5.4 \text{ dB}$	$\pm 6 \text{ dB}$
180-1000 MHz / 1 – 12.75 GHz (EN 301 908-1)	$\pm 3.0 / 2.9 \text{ dB}$	$\pm 3 \text{ dB}$
RF power (EN 300328 / EN 301893)	$\pm 5.3 \text{ dB}$	$\pm 6 \text{ dB}$
PIRE and power spectral density with diode	$\pm 5.2 \text{ dB}$	$\pm 6 \text{ dB}$
Radiated emission (magnetic field)		
9kHz – 30MHz	$\pm 3 \text{ dB}$	$\pm 6 \text{ dB}$
RF level for a given BER	$\pm 0.8 \text{ dB}$	$\pm 1.5 \text{ dB}$
Supply voltages	$\pm 3 \%$	$\pm 3 \%$
Temperature	$\pm 1 \text{ }^\circ\text{C}$	$\pm 1^\circ\text{C}$
Humidity	$\pm 5 \%$	$\pm 5 \%$
Time / Duty cycle	$\pm 4.4 \%$	$\pm 5 \%$
Adaptivity	$\pm 2.9 \text{ dB}$	/
Radiated emission (electric field for FCC standard)		
9kHz – 30MHz	$\pm 2.7 \text{ dB}$	/
30MHz – 1GHz	$\pm 5.0 \text{ dB}$	/
1GHz – 18GHz	$\pm 5.6 \text{ dB}$	/
18GHz – 26GHz	$\pm 5.7 \text{ dB}$	/
26GHz – 40GHz	$\pm 5.7 \text{ dB}$	/

For the calcul of expanded uncertainty, the confidence interval is 95 % (k=2).


9. TEST CONDITIONS AND RESULTS

9.1. Duty Cycle of Test Signal

Reference standard:	FCC part 15 Radio part 15.247 and RSS-247
Test method:	ANSI C63.10 : 2013 §11
Test description: EUT is directly connected to a spectrum analyser using attenuators.	

TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
Attenuator	Radiall	R412710124	16491	25/06/2019	25/08/2021
Cable	N	3m	16426	04/05/2019	04/07/2021
Cable	Huber + Suhner	SF102K	16041	28/02/2019	28/04/2021
Spectrum analyzer	Rohde & Schwarz	FSW43	14830	28/12/2018	28/02/2020
Thermohyrometer	Testo	608-H2	12268	27/11/2017	27/01/2020

DUTY CYCLE OF TEST SIGNAL - GRAPH			
EUT mode:	Continuous modulated Tx	T (°C):	22.2
Test Date:	17/12/2019	H (%):	44.5
Test Operator:	OAT	P (hPa):	998

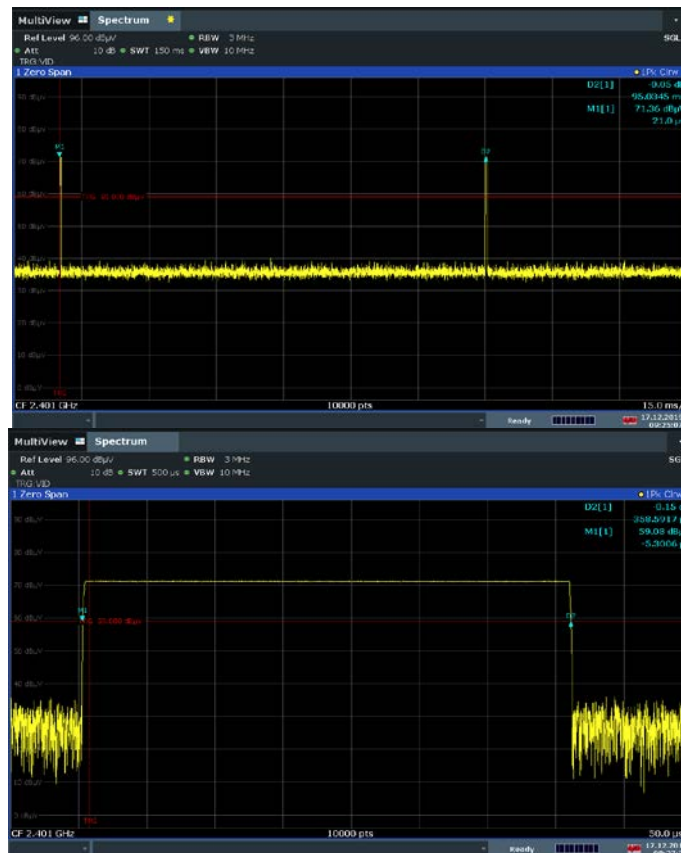

Duty Cycle = 0.358/95.035 = 0.0037 (0.37%)

Duty Factor = 10 * log(1/0.0037) = 24.32

Duty cycle test mode is < 98%. A **24.32dB** duty factor shall be considered.

9.2. Transmitter radiated spurious emissions at frequencies <30MHz

Reference standard:	FCC part 15 Radio part 15.247 and RSS-247
Test method:	ANSI C63.4: 2014 & ANSI C63.10: 2013
<p>Test description: EUT is set on an insulating support at 80cm above the ground reference plane.</p> <p>Preliminary (peak) measurements were performed at an antenna to EUT separation distance of 3-meter in a anechoic chamber. The EUT was rotated 360° in order to maximize radiated levels. Test antenna was oriented in 3 axes (0°, 45° and 90°).</p> <p>Final measurements (quasi-peak) were then performed in a 10-meter Open Area Test Site that complies to CISPR 16 in the same measurement conditions.</p> <p>All frequencies were investigated, where applicable.</p>	

TESTED CONFIGURATION	PARAMETER	SEVERITY	RESULT TAB.	VERDICT
Tx Mode / 0° / All Channels	9kHz-30MHz	15.209	EMI4598	PASS
Tx Mode / 45° / All Channels	9kHz-30MHz	15.209	EMI4599	PASS
Tx Mode / 90° / All Channels	9kHz-30MHz	15.209	EMI4600	PASS

LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	See Graph(es)
Relative Humidity	20 to 75 %	See Graph(es)
Atmospheric pressure	N/A	See Graph(es)
Test method deviation: N/A		
Supplementary information: From 9 kHz to 30MHz: limit indicated on the curves is calculated with 40 dB/decade extrapolation factor and 51.5 dB conversion factor.		

TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
Antenna	Rohde & Schwarz	HFH2-Z2	5825(*)	21/09/2017	21/05/2020
Cable	MegaPhase	N-3m	14853	12/02/2018	12/04/2020
Cable	SUCOFLEX	N-6,5m	14380	25/07/2019	25/09/2021
Cable	MegaPhase	N-8m	15813	12/11/2018	12/01/2021
Cable	Huber + Suhner	SF102K	16041	28/02/2019	28/04/2021
Receiver	Rohde & Schwarz	FSW43	14830	28/12/2018	28/02/2020
Shielded enclosure	COMTEST	SAC 3m	14494		
Software	Nexio		0000		
Thermohygrometer	Testo	608-H2	12269	27/11/2017	27/01/2020
Turntable	Maturo	NCD	14657		

BAT-EMC software version: V3.18.0.26

Blank cells = Permanent validity


(*) Under derogation EQS DER 000 S41 00068

TEST SETUP PHOTO(S)




TRANSMITTER RADIATED SPURIOUS EMISSIONS - TABULATED RESULTS							
Frequency (MHz)	Polarization	Level Peak (dB μ V/m)	Level Avg (dB μ V/m)	Limit Qpeak (dB μ V/m)	Limit Peak (dB μ V/m)	Limit Avg (dB μ V/m)	Margin dB
N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

No spurious emissions were detected.

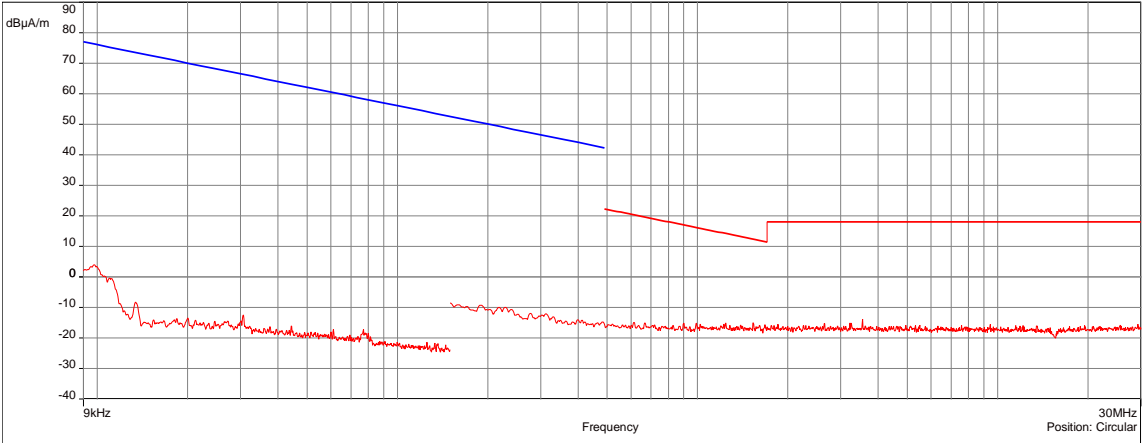TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES <30MHz - GRAPH				
Tx MODE / 0° / ALL CHANNELS			EMI4598	
EUT mode:	Continuous modulated Tx		T (°C): 19.3	
Test Date:	17/12/2019 17:28:57		H (%): 64.8	
Test Operator:	OAT		P (hPa): 992	
<div style="text-align: right;"> <p> — FCC/FCC Part 15 §209 Tx - Moyenne/3.0m/ — FCC/FCC Part 15 §209 Tx - QCrête/3.0m/ — Meas.Peak </p> </div> 				
POSITION	FREQUENCIES	RBW	VBW	DETECTOR
Circular	9kHz-150kHz	300Hz	1kHz	Peak
Circular	150kHz-1MHz	10kHz	30kHz	Peak
Circular	1MHz-30MHz	10kHz	30kHz	Peak
Configuration:				
Comments:	Limit indicated on these plots are calculated with 40 dB/decade extrapolation factor and 51.5dB conversion factor.			
EUT modification(s): N/A				


TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES <30MHz - TABULATED RESULTS			
Tx MODE / 0° / ALL CHANNELS			EMI4598
Frequency (MHz)	Antenna Position	Level (dB μ A/m)	Limit (dB μ A/m)
N/A	N/A	N/A	N/A

No spurious emissions were detected.

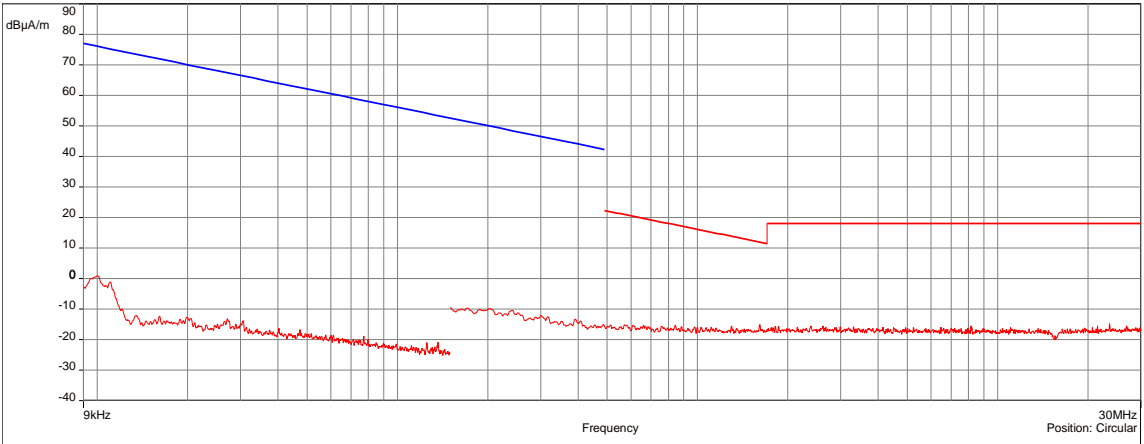TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES <30MHz - GRAPH				
Tx MODE / 45° / ALL CHANNELS				EMI4599
EUT mode:	Continuous modulated Tx			T (°C): 19.3
Test Date:	17/12/2019 17:37:23			H (%): 64.8
Test Operator:	OAT			P (hPa): 992
				
POSITION	FREQUENCIES	RBW	VBW	DETECTOR
Circular	9kHz-150kHz	300Hz	1kHz	Peak
Circular	150kHz-1MHz	10kHz	30kHz	Peak
Circular	1MHz-30MHz	10kHz	30kHz	Peak
Configuration:				
Comments:	Limit indicated on these plots are calculated with 40 dB/decade extrapolation factor and 51.5dB conversion factor.			
EUT modification(s): N/A				

TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES <30MHz - TABULATED RESULTS			
Tx MODE / 45° / ALL CHANNELS			EMI4599
Frequency (MHz)	Antenna Position	Level (dBµA/m)	Limit (dBµA/m)
N/A	N/A	N/A	N/A

No spurious emissions were detected.

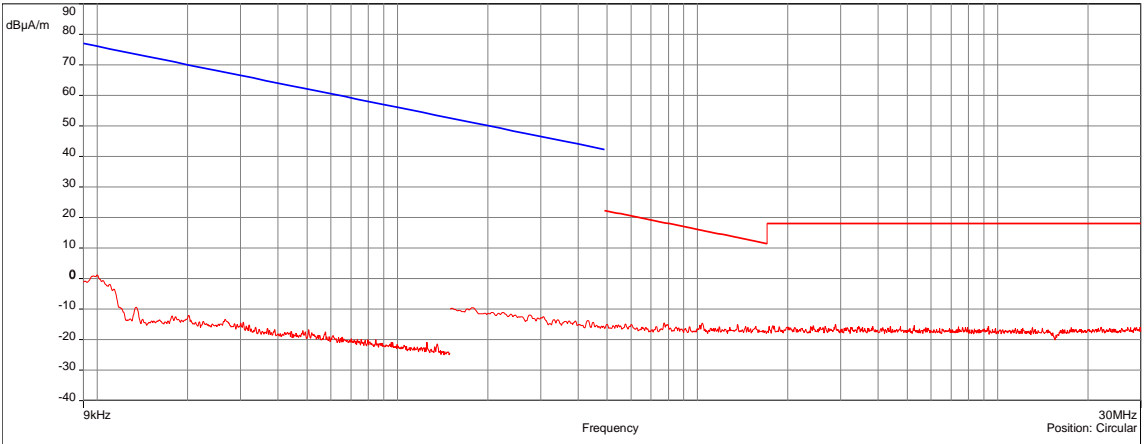TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES <30MHz - GRAPH				
Tx MODE / 90° / ALL CHANNELS			EMI4600	
EUT mode:	Continuous modulated Tx		T (°C):	19.3
Test Date:	17/12/2019 17:40:35		H (%):	64.8
Test Operator:	OAT		P (hPa):	992
— FCC/FCC Part 15 §209 Tx - Moyenne/3.0m/ — FCC/FCC Part 15 §209 Tx - QCrête/3.0m/ — Meas.Peak				
				
POSITION	FREQUENCIES	RBW	VBW	DETECTOR
Circular	9kHz-150kHz	300Hz	1kHz	Peak
Circular	150kHz-1MHz	10kHz	30kHz	Peak
Circular	1MHz-30MHz	10kHz	30kHz	Peak
Configuration:				
Comments:	Limit indicated on these plots are calculated with 40 dB/decade extrapolation factor and 51.5dB conversion factor.			
EUT modification(s): N/A				

TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES <30MHz - TABULATED RESULTS			
Tx MODE / 90° / ALL CHANNELS			EMI4600
Frequency (MHz)	Antenna Position	Level (dBµA/m)	Limit (dBµA/m)
N/A	N/A	N/A	N/A

No spurious emissions were detected.

9.3. Transmitter radiated spurious emissions at frequencies >30MHz

Reference standard:	FCC part 15 Radio part 15.247 and RSS-247
Test method:	ANSI C63.10: 2013
<p>General test setup: EUT is set on an insulating support at 80cm above the ground reference plane (150cm for $f > 1\text{GHz}$).</p> <p>Preliminary (peak) measurements were performed at an antenna to EUT separation distance of 3-meter. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in horizontal and vertical polarities.</p> <p>Final measurements (quasi-peak or average) were then performed in a semi-anechoic chamber or Open Area Test Site that complies to CISPR 16. The EUT was rotated 360° about its azimuth and adjusting the receive antenna height from 1 to 4 m.</p> <p>All frequencies were investigated, where applicable.</p> <p>For portable equipments a research of maximum level is done on the 3 axes. Only the highest levels are recorded.</p>	

TESTED CONFIGURATION	PARAMETER	SEVERITY	RESULT TAB.	VERDICT
Tx mode - All Channels for Freq < 1Ghz	30MHz-1GHz	15.209	EMI4597	PASS
Tx mode - Low Channel for Freq > 1Ghz	1GHz-18GHz		EMI4554	PASS
Tx mode - Mid Channel for Freq > 1Ghz	1GHz-18GHz		EMI4575	PASS
Tx mode - High Channel for Freq > 1Ghz	1GHz-18GHz		EMI4574	PASS

LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	See Graph(es)
Relative Humidity	20 to 75 %	See Graph(es)
Atmospheric pressure	N/A	See Graph(es)
Test method deviation: N/A		
Supplementary information: N/A		

TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
Antenna	ETS-Lindgren	3117	5456	24/07/2019	24/09/2022
Antenna	Electro Metrics	BIA-30HF	0824	13/06/2018	13/08/2021
Antenna	Rohde & Schwarz	HL223	3126	13/06/2018	13/08/2021
Cable	MegaPhase	F135N1N28	16664	25/10/2019	25/12/2021
Cable	MegaPhase	F135N1N28	16666	25/10/2019	25/12/2021
Cable	SUCOFLEX	N-3m	14378	25/06/2019	25/08/2021
Cable	SUCOFLEX	N-3m	14379	25/06/2019	25/08/2021
Cable	MegaPhase	N-3m	14852	29/10/2018	29/12/2020
Cable	MegaPhase	N-3m	14853	12/02/2018	12/04/2020
Cable	MegaPhase	N-5m	14855	12/02/2018	12/04/2020
Cable	SUCOFLEX	N-6,5m	14380	25/07/2019	25/09/2021
Cable	MegaPhase	N-8m	15813	12/11/2018	12/01/2021
Cable	Huber + Suhner	SF102K	16041	28/02/2019	28/04/2021
Filter	Micro-Tronics	HPM 15162	10273	11/01/2019	11/03/2021
Filter	Micro-Tronics	HPM18865	12843	08/06/2018	08/08/2020
Filter	Wainwright	WRCGV	9771	07/01/2019	07/03/2021

CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
	Instruments	2402/2480- 2380/2500- 40/10EE-200W			
Preamplifier	Techniwave	APS16-0087	14040	25/06/2019	25/08/2020
Receiver	Rohde & Schwarz	FSW43	14830	28/12/2018	28/02/2020
Shielded enclosure	RAY PROOF	C.V2	1423		
Shielded enclosure	COMTEST	SAC 3m	14494		
Software	Nexio		0000		
Thermohygrometer	Testo	608-H1	7562	25/01/2019	25/03/2021
Thermohygrometer	Testo	608-H2	12269	27/11/2017	27/01/2020
Thermohygrometer	Bioblock Scientific	Météostar	0963	25/01/2019	25/03/2021

BAT-EMC software version: V3.18.0.26

Blank cells = Permanent validity

TEST SETUP PHOTO(S) – EUT POSITION FOR FREQ < 1GHZ


TEST SETUP PHOTO(S) – EUT POSITION FOR FREQ > 1GHZ




TEST SETUP PHOTO(S) – FOR 30MHZ <FREQ< 200MHZ



TEST SETUP PHOTO(S) - FOR 200MHZ <FREQ< 1GHZ




TEST SETUP PHOTO(S) - FOR 1GHZ <FREQ

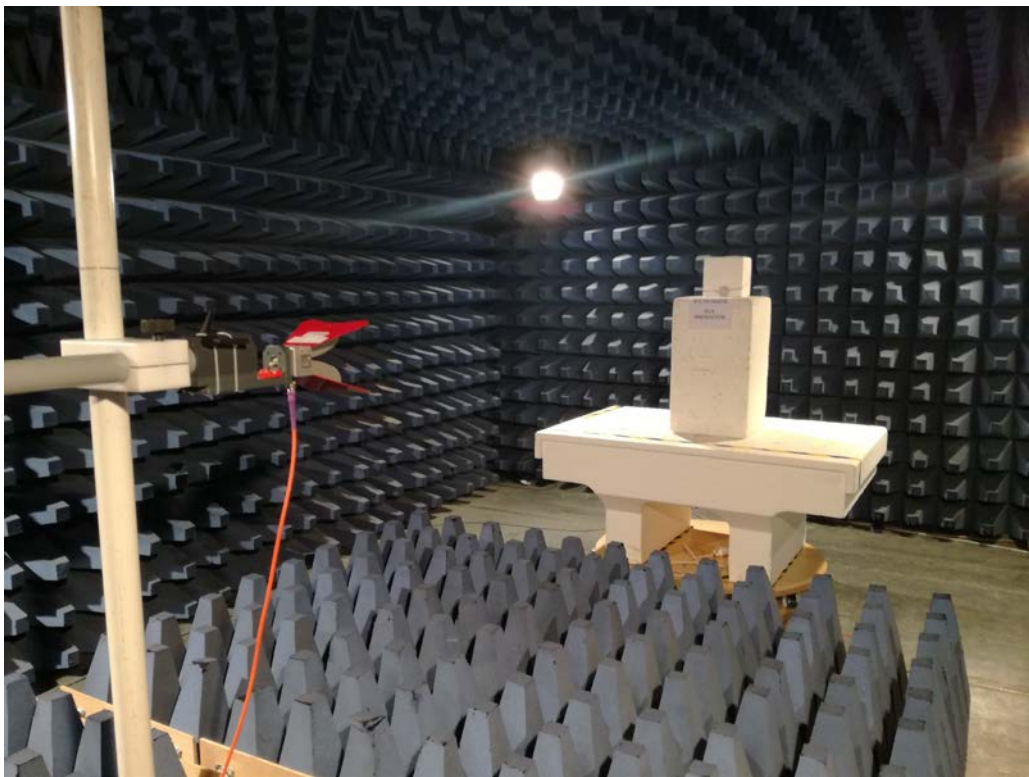


TRANSMITTER RADIATED SPURIOUS EMISSIONS - TABULATED RESULTS					
TX MODE - LOW CHANNEL					
Frequency (MHz)	Polarization	Level Peak (dB μ V/m)	Level Avg (dB μ V/m)	Limit Avg (dB μ V/m)	Margin dB
2272.527	Vertical	55.29	37.13	54	16.87
2289.329	Vertical	52.11	36.38	54	17.62
2313.331	Vertical	53.3	37.47	54	16.53
2344.934	Vertical	51.37	36.43	54	17.57
2361.536	Vertical	52.15	35.91	54	18.09
2376.938	Vertical	53.26	37.04	54	16.96
4801.680	Horizontal	45.97	N/P	54	8.03
TX MODE - MID CHANNEL					
Frequency (MHz)	Polarization	Level Peak (dB μ V/m)	Level Avg (dB μ V/m)	Limit Avg (dB μ V/m)	Margin dB
2271.593	Vertical	54.76	35.21	54	18.79
2291.929	Vertical	51.77	36.1	54	17.9
2313.131	Vertical	53.46	36.84	54	17.16
2328.733	Vertical	51.18	36.26	54	17.74
2361.336	Vertical	51.74	35.55	54	18.45
2380.338	Vertical	52.46	36.24	54	17.76
4881.188	Vertical	42.95	N/P	54	11.05
7321.932	Vertical	52.07	N/P	54	1.93
4881.188	Horizontal	42.06	N/P	54	11.94
7323.432	Horizontal	45.39	N/P	54	8.61
TX MODE - HIGH CHANNEL					
Frequency (MHz)	Polarization	Level Peak (dB μ V/m)	Level Avg (dB μ V/m)	Limit Avg (dB μ V/m)	Margin dB
2329.333	Vertical	51.32	36.08	54	17.92
2337.134	Vertical	51.49	36.04	54	17.96
2345.335	Vertical	53.84	36.01	54	17.99
2353.335	Vertical	55.03	37.01	54	16.99
2369.137	Vertical	53.6	36.8	54	17.2
4962.196	Vertical	40.97	36.24	54	17.76
7443.444	Vertical	46.67	N/P	54	7.33
4960.696	Horizontal	44.46	N/P	54	9.54
7443.444	Horizontal	43.16	N/P	54	10.84

TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES >30MHz - GRAPH

TX MODE - ALL CHANNELS FOR FREQ < 1GHz		EMI4595	
EUT mode:	Continuous modulated Tx	T (°C):	19.3
Test Date:	17/12/2019 15:58:55	H (%):	64.8
Test Operator:	OAT	P (hPa):	992

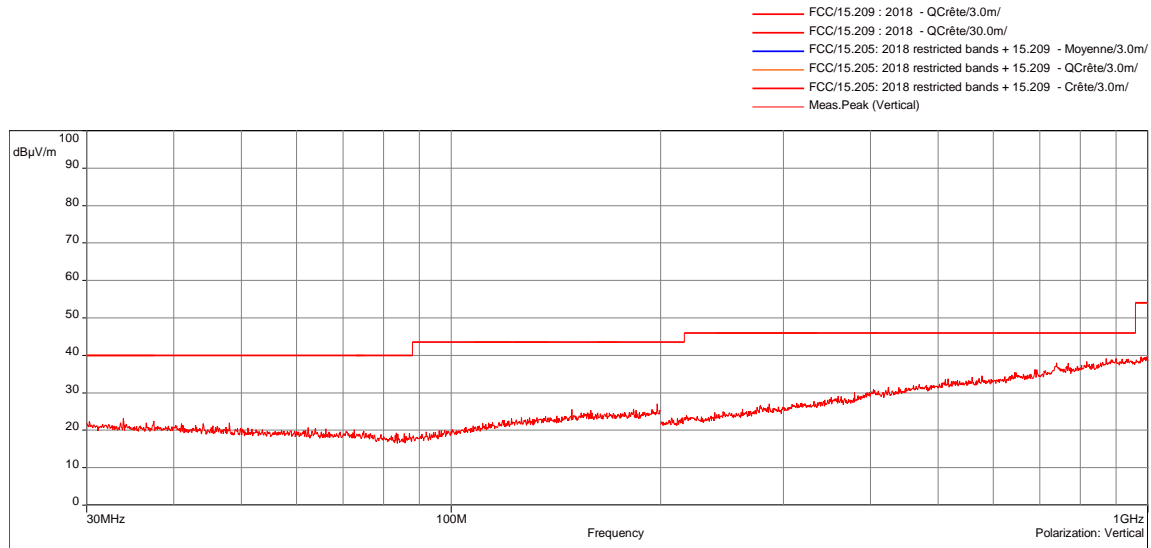

Tx mode BLUE PUCK Family - All Channels for Freq < 1Ghz - 12/17/2019 15:58 - 4595

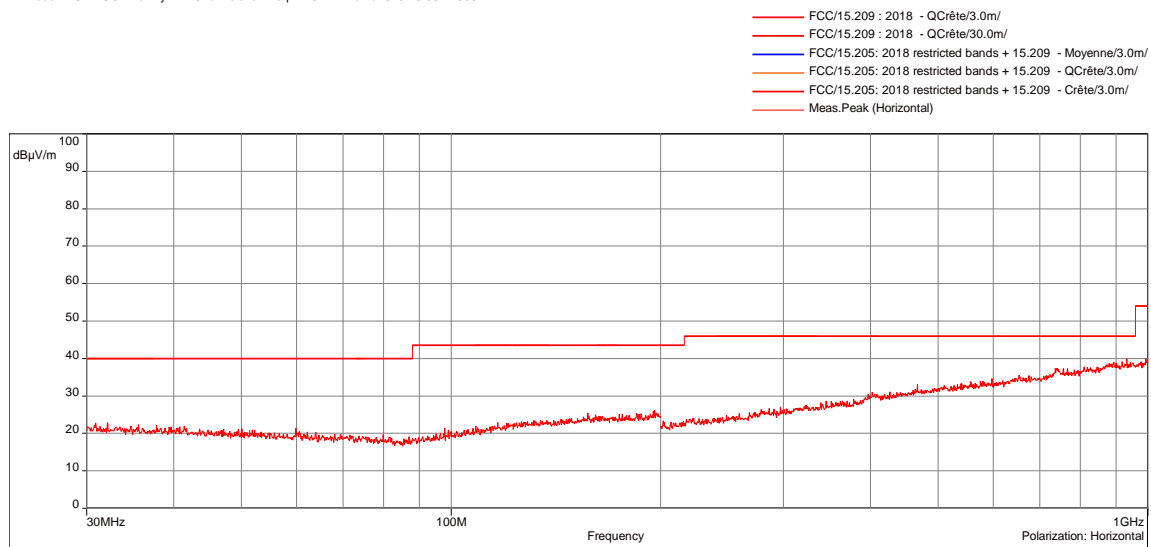

Tx mode BLUE PUCK Family - All Channels for Freq < 1Ghz - 12/17/2019 15:58 - 4595

POSITION	FREQUENCIES	RBW	VBW	DETECTOR
Vertical	30MHz-200MHz	100kHz	300kHz	Peak
Horizontal	30MHz-200MHz	100kHz	300kHz	Peak
Vertical	200MHz-1GHz	100kHz	300kHz	Peak
Horizontal	200MHz-1GHz	100kHz	300kHz	Peak

EUT modification(s): N/A



TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES >30MHz - TABULATED RESULTS

TX MODE - ALL CHANNELS FOR FREQ < 1GHz			EMI4595
Frequency (MHz)	Polarization	Level (dBµV/m)	Limit (dBµV/m)
N/A	N/A	N/A	N/A

No spurious emissions were detected.

TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES >30MHz - GRAPH

Tx MODE - LOW CHANNEL FOR FREQ > 1GHz		EMI4554	
EUT mode:	Continuous modulated Tx	T (°C):	21.9
Test Date:	17/12/2019 15:17:06	H (%):	42.6
Test Operator:	OAT	P (hPa):	992

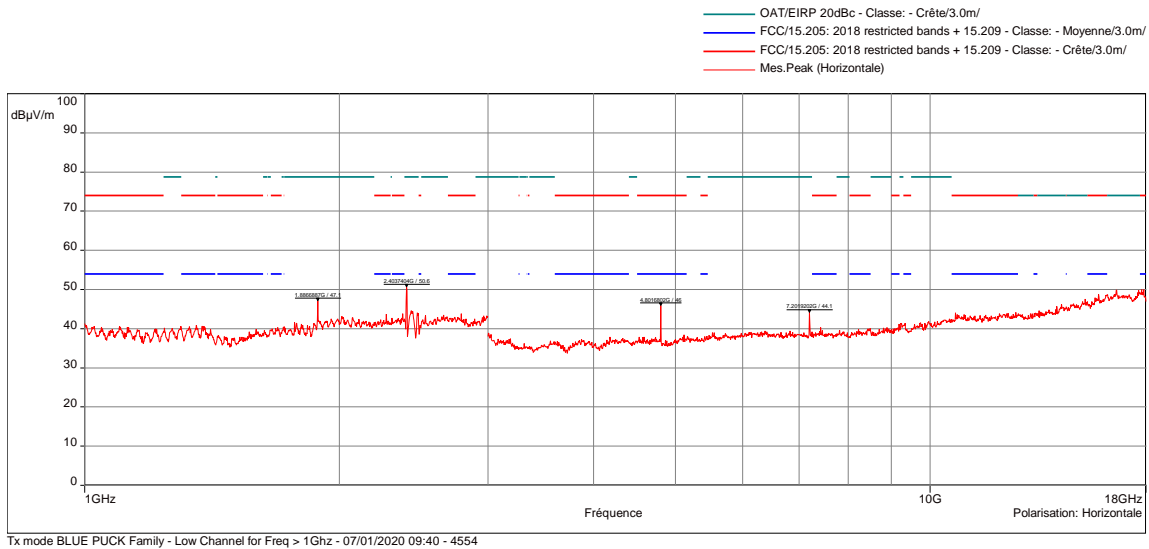
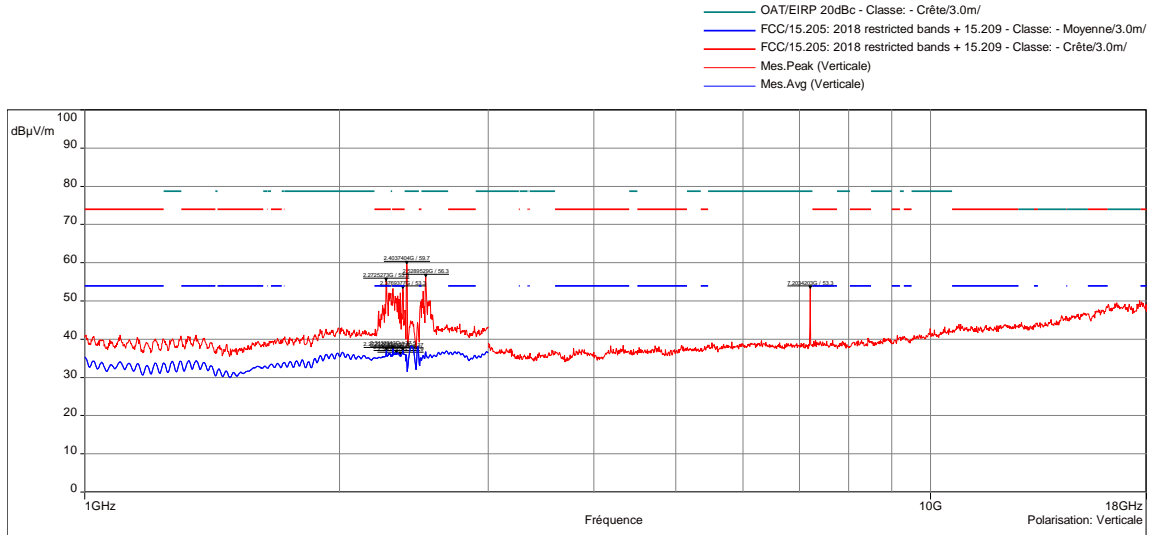


POSITION	FREQUENCIES	RBW	VBW	DETECTOR
Vertical	1GHz-3GHz	1MHz	3MHz	Mes.Peak; Mes.Avg;
Horizontal	1GHz-3GHz	1MHz	3MHz	Peak
Vertical	3GHz-18GHz	1MHz	3MHz	Peak
Horizontal	3GHz-18GHz	1MHz	3MHz	Peak
Configuration:				
Comments:	Above 18GHz no spurious emissions were detected.			
EUT modification(s): N/A				

TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES >30MHz - TABULATED RESULTS					
TX MODE - LOW CHANNEL FOR FREQ > 1GHz				EMI4554	
Frequency (MHz)	Polarization	Level Peak (dB μ V/m)	Level Avg (dB μ V/m)	Limit Avg (dB μ V/m)	Margin dB
2272.527	Vertical	55.29	37.13	54	16.87
2289.329	Vertical	52.11	36.38	54	17.62
2313.331	Vertical	53.3	37.47	54	16.53
2344.934	Vertical	51.37	36.43	54	17.57
2361.536	Vertical	52.15	35.91	54	18.09
2376.938	Vertical	53.26	37.04	54	16.96
4801.680	Horizontal	45.97	N/P	54	8.03

Spurious which has more than 20 dB of margin compared to the applicable limit is not necessarily reported

TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES >30MHz - GRAPH			
TX MODE - MID CHANNEL FOR FREQ > 1GHz			EMI4575
EUT mode:	Continuous modulated Tx	T (°C):	21.9
Test Date:	17/12/2019 10:10:36	H (%):	42.6
Test Operator:	OAT	P (hPa):	992

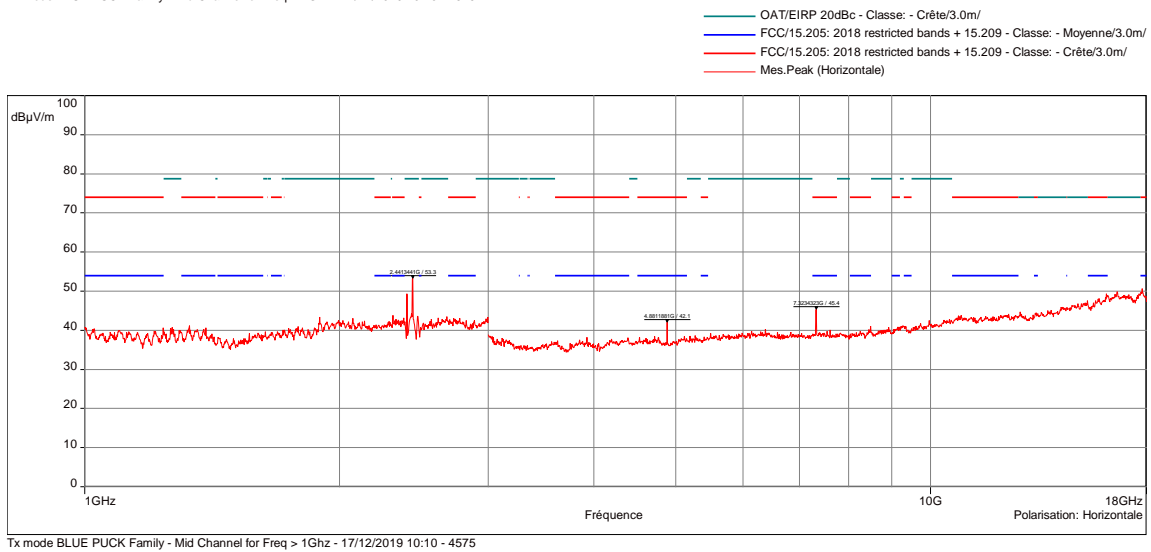
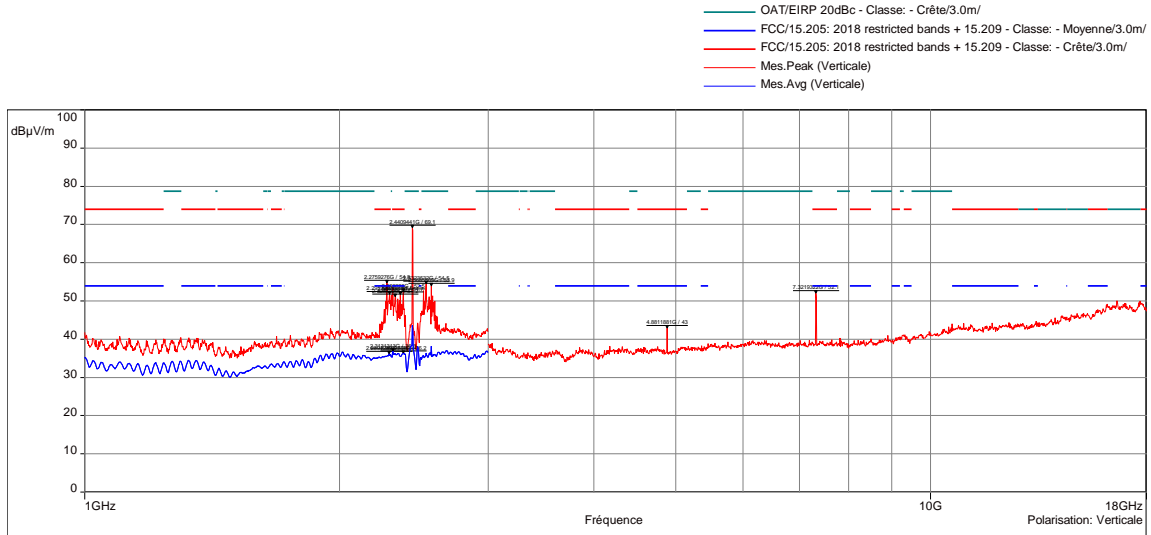


POSITION	FREQUENCIES	RBW	VBW	DETECTOR
Vertical	1GHz-3GHz	1MHz	3MHz	Mes.Peak; Mes.Avg;
Horizontal	1GHz-3GHz	1MHz	3MHz	Peak
Vertical	3GHz-18GHz	1MHz	3MHz	Peak
Horizontal	3GHz-18GHz	1MHz	3MHz	Peak
Configuration:				
Comments:	Above 18GHz no spurious emissions were detected.			
EUT modification(s): N/A				

TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES >30MHz - TABULATED RESULTS					
TX MODE - MID CHANNEL FOR FREQ > 1GHz				EMI4575	
Frequency (MHz)	Polarization	Level Peak (dB μ V/m)	Level Avg (dB μ V/m)	Limit Avg (dB μ V/m)	Margin dB
2271.593	Vertical	54.76	35.21	54	18.79
2291.929	Vertical	51.77	36.1	54	17.9
2313.131	Vertical	53.46	36.84	54	17.16
2328.733	Vertical	51.18	36.26	54	17.74
2361.336	Vertical	51.74	35.55	54	18.45
2380.338	Vertical	52.46	36.24	54	17.76
4881.188	Vertical	42.95	N/P	54	11.05
7321.932	Vertical	52.07	N/P	54	1.93
4881.188	Horizontal	42.06	N/P	54	11.94
7323.432	Horizontal	45.39	N/P	54	8.61

Spurious which has more than 20 dB of margin compared to the applicable limit is not necessarily reported

TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES >30MHz - GRAPH			
TX MODE - HIGH CHANNEL FOR FREQ > 1GHz			EMI4574
EUT mode:	Continuous modulated Tx	T (°C):	21.9
Test Date:	17/12/2019 10:03:45	H (%):	42.6
Test Operator:	OAT	P (hPa):	992

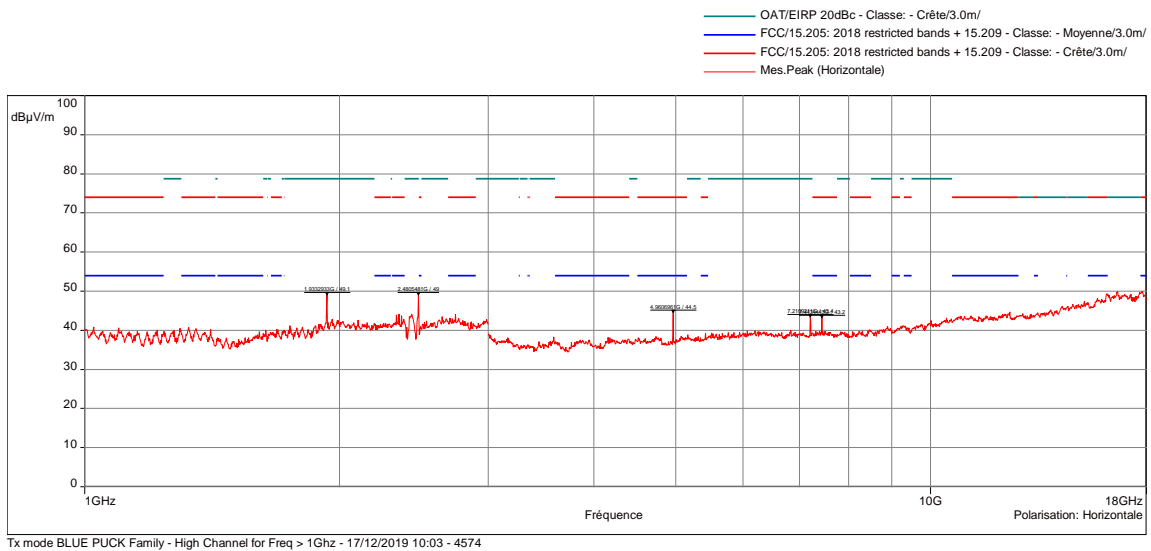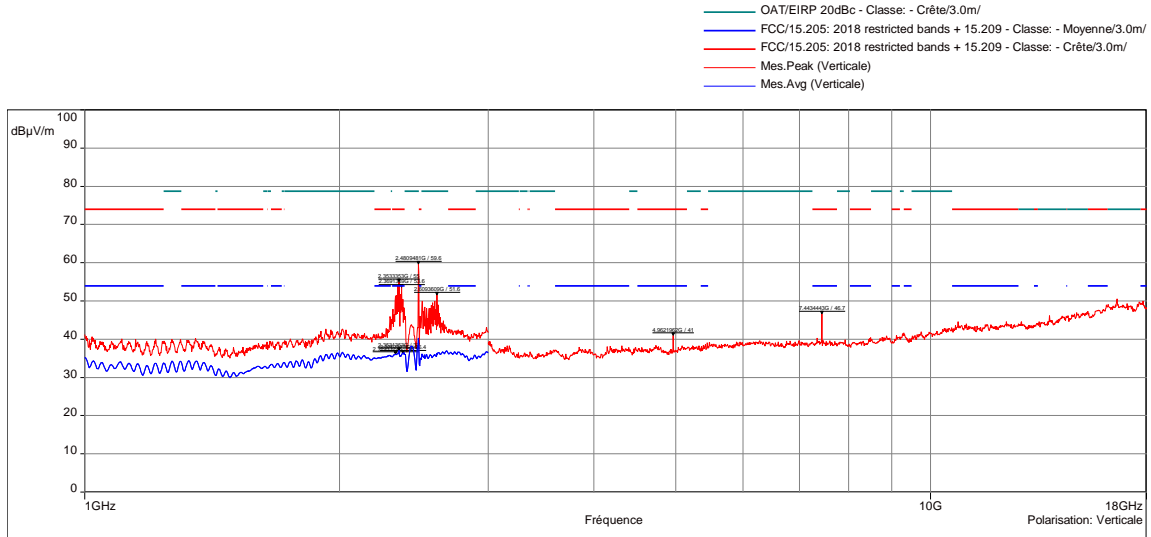

POSITION	FREQUENCIES	RBW	VBW	DETECTOR
Vertical	1GHz-3GHz	1MHz	3MHz	Mes.Peak; Mes.Avg;
Horizontal	1GHz-3GHz	1MHz	3MHz	Peak
Vertical	3GHz-18GHz	1MHz	3MHz	Peak
Horizontal	3GHz-18GHz	1MHz	3MHz	Peak
Configuration:				
Comments:	Above 18GHz no spurious emissions were detected.			
EUT modification(s): N/A				

TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES >30MHZ - TABULATED RESULTS					
TX MODE - HIGH CHANNEL FOR FREQ > 1GHZ				EMI4574	
Frequency (MHz)	Polarization	Level Peak (dBµV/m)	Level Avg (dBµV/m)	Limit Avg (dBµV/m)	Margin dB
2329.333	Vertical	51.32	36.08	54	17.92
2337.134	Vertical	51.49	36.04	54	17.96
2345.335	Vertical	53.84	36.01	54	17.99
2353.335	Vertical	55.03	37.01	54	16.99
2369.137	Vertical	53.6	36.8	54	17.2
4962.196	Vertical	40.97	36.24	54	17.76
7443.444	Vertical	46.67	N/P	54	7.33
4960.696	Horizontal	44.46	N/P	54	9.54
7443.444	Horizontal	43.16	N/P	54	10.84

Spurious which has more than 20 dB of margin compared to the applicable limit is not necessarily reported

9.4. Band-edge compliance

Reference standard:	FCC part 15 Radio part 15.247 and RSS-247
Test method:	FCC part 15.247 subclause d) and RSS-247
Test description: d) In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. EUT is set on an insulating support at 80cm above the ground reference plane (150cm for $f > 1\text{GHz}$). Measurements were performed in a semi-anechoic chamber or Open Area Test Site that complies to CISPR 16. The EUT was rotated 360° about its azimuth and adjusting the receive antenna height from 1 to 4 m. For portable equipments a research of maximum level is done on the 3 axes. Only the highest levels are recorded.	

TESTED CONFIGURATION	PARAMETER	SEVERITY	RESULT TAB.	VERDICT
Band edge / Low Channel	2.3835GHz- 2.4035GHz	15.247	EMI4571	PASS
Band edge / High Channel	2.4785GHz- 2.4985GHz	15.247	EMI4570	PASS


LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	See Graph(es)
Relative Humidity	20 to 75 %	See Graph(es)
Atmospheric pressure	N/A	See Graph(es)
TEST METHOD DEVIATION: N/A		
Supplementary information: N/A		

TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
Antenna	ETS-Lindgren	3117	5456	24/07/2019	24/09/2022
Cable	MegaPhase	TM18-N1N1-118	12841	09/05/2018	09/07/2020
Cable	MegaPhase	TM18-N1N1-197	12840	09/05/2018	09/07/2020
Receiver	Rohde & Schwarz	FSW43	14830	28/12/2018	28/02/2020
Shielded enclosure	RAY PROOF	C.V2	1423		
Software	Nexio		0000		
Thermohygrometer	Testo	608-H1	7561	25/01/2019	25/03/2021
Thermohygrometer	Bioblock Scientific	Météostar	0963	25/01/2019	25/03/2021

BAT-EMC software version: V3.18.0.26

Blank cells = Permanent validity

TEST SETUP PHOTO(S)

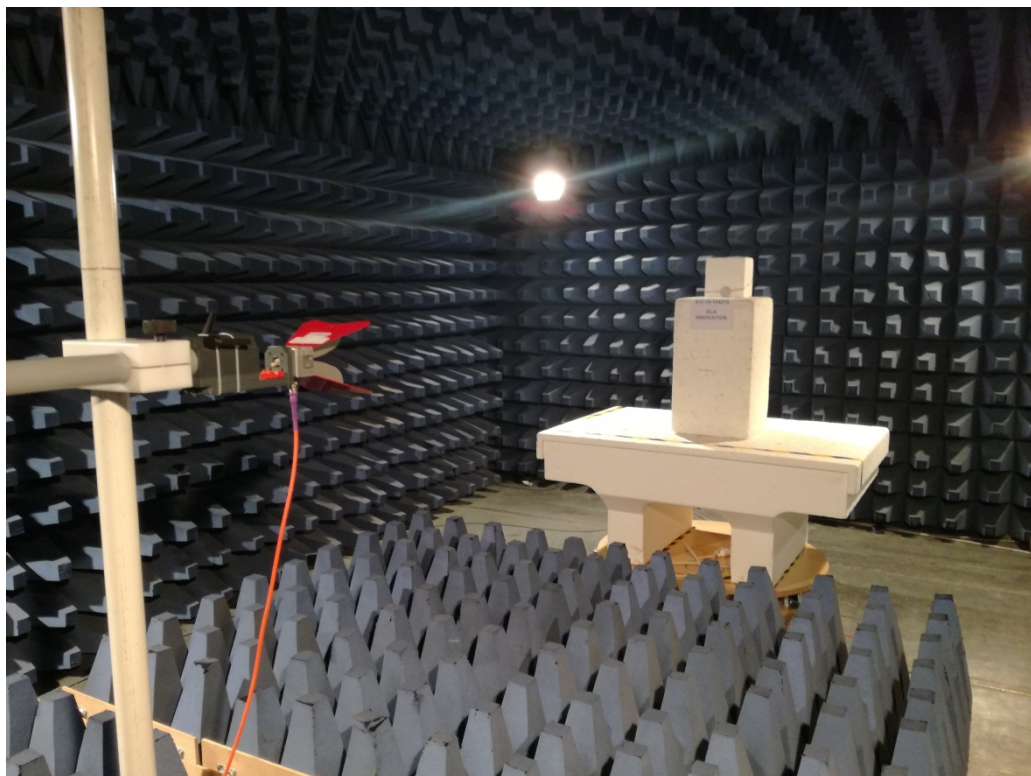


BAND-EDGE - TABULATED RESULTS					
Frequency (MHz)	Polarization	Level Peak (dB μ V/m)	Limit Avg (dB μ V/m)	Limit Peak (dB μ V/m)	Margin dB
2384.784	Vertical	42.55	54	74	11.45
2385.000	Vertical	42.3	54	74	11.7
2399.943	Vertical	70.95	N/A	78.71	7.76
2483.569	Vertical	48.51	54	74	25.49
2483.973	Vertical	45.5	54	74	28.5
2484.227	Vertical	44.66	54	74	29.34
2484.941	Vertical	43.9	54	74	30.1
2488.721	Vertical	46	54	74	28
2489.225	Vertical	48.99	54	74	25.01
2491.953	Vertical	44.11	54	74	29.89
2492.101	Vertical	43.48	54	74	30.52
2496.974	Vertical	42.27	54	74	31.73

BAND-EDGE - GRAPH			
BAND EDGE / LOW CHANNEL			EMI4571
EUT mode:	Continuous modulated Tx		T (°C): 21.9
Test Date:	17/12/2019 08:15:33		H (%): 42.6
Test Operator:	OAT		P (hPa): 992

Description Sous-bande 1
 Fréquences:2.3835 GHz - 2.4035 GHz (Mode analyseur) 10000 Points
 Réglages: RBW: 100kHz, VBW: 300kHz, Auto, Atténuation : 10 dB, Nombre de Balayages : 1, Preamp : Off, LN Preamp : Off, Preselecteur: Off
 Polarisation:Verticale
 Distance: 3 m


— OAT/15.247: 2018 d) band Edged - 20dBc vs EIRP - Classe:40 - Crête/3.0m/
 — FCC/15.205: 2018 restricted bands + 15.209 - Classe: - Moyenne/3.0m/
 — FCC/15.205: 2018 restricted bands + 15.209 - Classe: - Crête/3.0m/
 — Mes.Peak (Verticale)

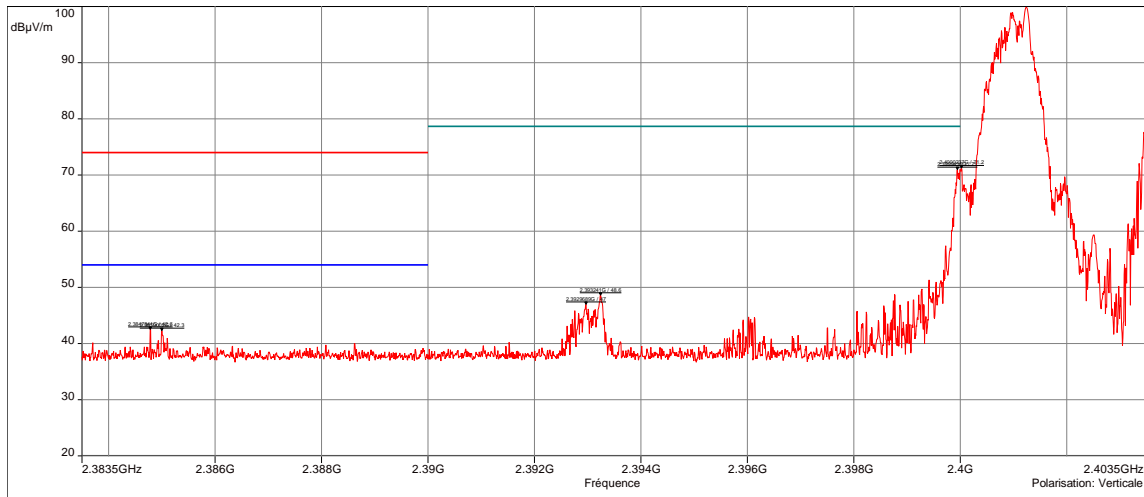

Band edge / BLUE PUCK Family -Low Channel - 17/12/2019 08:15 - 4571

Description Sous-bande 2
 Fréquences:2.3835 GHz - 2.4035 GHz (Mode analyseur) 10000 Points
 Réglages: RBW: 100kHz, VBW: 300kHz, Auto, Atténuation : 10 dB, Nombre de Balayages : 1, Preamp : Off, LN Preamp : Off, Preselecteur: Off
 Polarisation:Horizontale
 Distance: 3 m

— OAT/15.247: 2018 d) band Edged - 20dBc vs EIRP - Classe:40 - Crête/3.0m/
 — FCC/15.205: 2018 restricted bands + 15.209 - Classe: - Moyenne/3.0m/
 — FCC/15.205: 2018 restricted bands + 15.209 - Classe: - Crête/3.0m/
 — Mes.Peak (Horizontale)

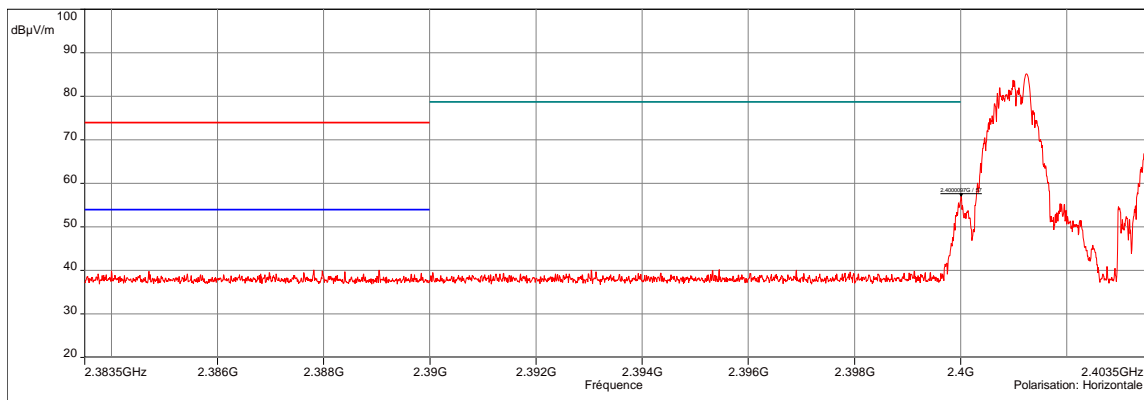

Band edge / BLUE PUCK Family -Low Channel - 17/12/2019 08:15 - 4571


POSITION	FREQUENCIES	RBW	VBW	DETECTOR
Vertical	2.3835GHz-2.4035GHz	100kHz	300kHz	Peak
Horizontal	2.3835GHz-2.4035GHz	100kHz	300kHz	Peak
Configuration:				
Comments:				
EUT modification(s): N/A				

BAND-EDGE - TABULATED RESULTS					
BAND EDGE / LOW CHANNEL				EMI4571	
Frequency (MHz)	Polarization	Level Peak (dB μ V/m)	Limit Avg (dB μ V/m)	Limit Peak (dB μ V/m)	Margin dB
2384.784	Vertical	42.55	54	74	11.45
2385.000	Vertical	42.3	54	74	11.7
2399.943	Vertical	70.95	N/A	78.71	7.76

Spurious which has more than 20 dB of margin compared to the applicable limit is not necessarily reported


BAND-EDGE - GRAPH			
BAND EDGE / HIGH CHANNEL			EMI4570
EUT mode:	Continuous modulated Tx		T (°C): 21.9
Test Date:	17/12/2019 08:20:51		H (%): 42.6
Test Operator:	OAT		P (hPa): 992

Description Sous-bande 1
 Fréquences: 2.4785 GHz - 2.4985 GHz (Mode analyseur) 10000 Points
 Réglages: RBW: 100kHz, VBW: 300kHz, Auto, Atténuation : 10 dB, Nombre de Balayages : 1, Preamp : Off, LN Preamp : Off, Preselecteur: Off
 Polarisation: Verticale
 Distance: 3 m

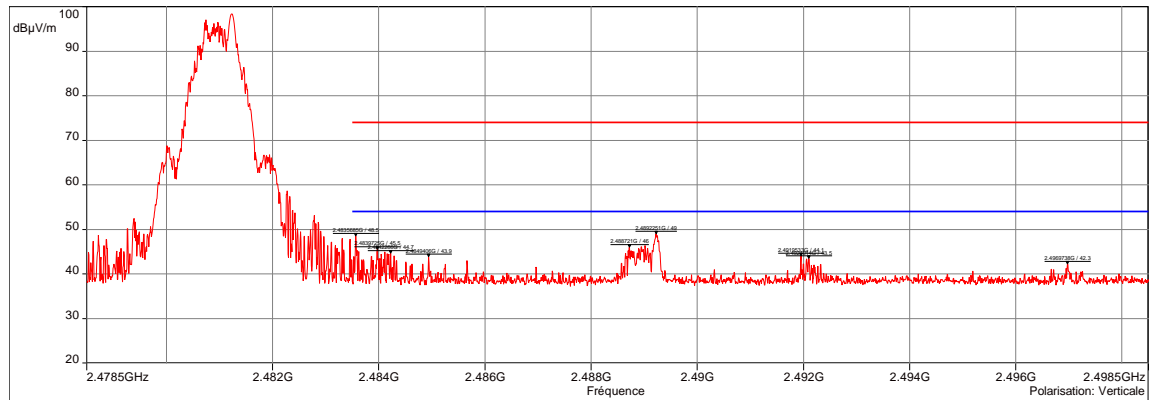

Band edge / BLUE PUCK Family - High Channel - 17/12/2019 08:20 - 4570

Description Sous-bande 2
 Fréquences: 2.4785 GHz - 2.4985 GHz (Mode analyseur) 10000 Points
 Réglages: RBW: 100kHz, VBW: 300kHz, Auto, Atténuation : 10 dB, Nombre de Balayages : 1, Preamp : Off, LN Preamp : Off, Preselecteur: Off
 Polarisation: Horizontale
 Distance: 3 m

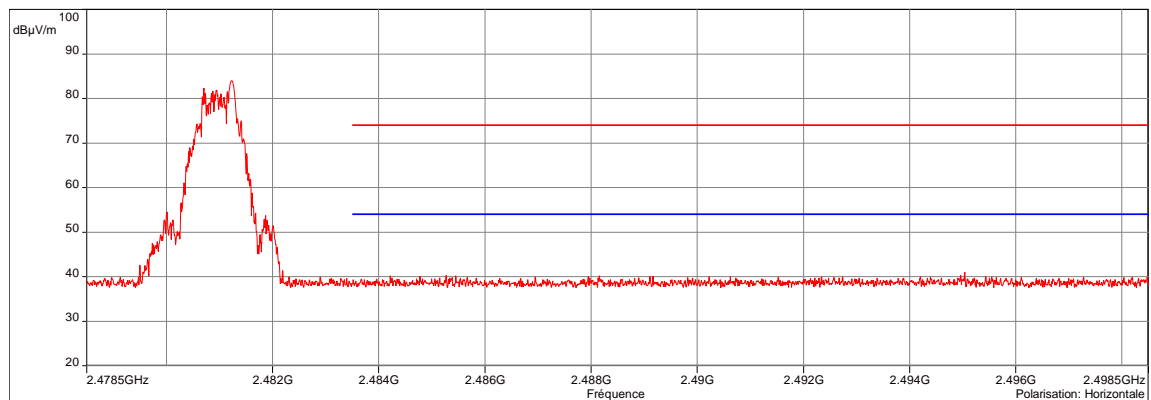

Band edge / BLUE PUCK Family - High Channel - 17/12/2019 08:20 - 4570

POSITION	FREQUENCIES	RBW	VBW	DETECTOR
Vertical	2.4785GHz-2.4985GHz	100kHz	300kHz	Peak
Horizontal	2.4785GHz-2.4985GHz	100kHz	300kHz	Peak
Configuration:				
Comments:				
EUT modification(s): N/A				

BAND-EDGE - TABULATED RESULTS					
BAND EDGE / HIGH CHANNEL				EMI4570	
Frequency (MHz)	Polarization	Level Peak (dB μ V/m)	Limit Avg (dB μ V/m)	Limit Peak (dB μ V/m)	Margin dB
2483.569	Vertical	48.51	54	74	25.49
2483.973	Vertical	45.5	54	74	28.5
2484.227	Vertical	44.66	54	74	29.34
2484.941	Vertical	43.9	54	74	30.1
2488.721	Vertical	46	54	74	28
2489.225	Vertical	48.99	54	74	25.01
2491.953	Vertical	44.11	54	74	29.89
2492.101	Vertical	43.48	54	74	30.52
2496.974	Vertical	42.27	54	74	31.73

Spurious which has more than 20 dB of margin compared to the applicable limit is not necessarily reported

9.5. Maximum peak conducted power of the intentional radiator

a) NORMAL TESTS CONDITIONS

Reference standard:	FCC part 15 Radio part 15.247 and RSS-247
Test method:	ANSI C63.10: 2013
<p>Test description: EUT is set on an insulating support at 150cm above the ground reference plane. Measurement are done on a normalized test site by the substitution method.</p> <p>The test antenna is oriented in the two polarizations (vertical and horizontal), and the product is rotated at 360° in the horizontal plane (See photo(s) for initial position of the EUT(0°)). If applicable the test antenna was raised and lowered through the specified range of height until a maximum signal level is detected.</p> <p>For portable equipments a research of maximum level is done on the 3 axes. Only the highest levels are recorded.</p>	

TESTED CONFIGURATION	PARAMETER	SEVERITY	RESULT TAB.	VERDICT
EIRP - Low Channel	2.4GHz-2.402GHz	1W (30dBm)	EMI4544	PASS
EIRP - Mid Channel	2.44GHz-2.442GHz	1W (30dBm)	EMI4546	PASS
EIRP - High Channel	2.48GHz-2.482GHz	1W (30dBm)	EMI4545	PASS


LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	See Graph(es)
Relative Humidity	20 to 75 %	See Graph(es)
Atmospheric pressure	N/A	See Graph(es)
<p>Test method deviation: EUT has its dedicated internal PCB antenna, due to this, this measurement was done in radiated by the substitution method as described in Annex G of ANSI C63.10.</p>		
Supplementary information: N/A		

TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
Antenna	ETS-Lindgren	3117	5456	24/07/2019	24/09/2022
Attenuator	EMITECH	SUB.V2-H	14495	25/09/2019	25/11/2020
Attenuator	EMITECH	SUB.V2-V	14496	25/09/2019	25/11/2020
Cable	MegaPhase	N-3m	14852	29/10/2018	29/12/2020
Cable	MegaPhase	N-5m	14855	12/02/2018	12/04/2020
Cable	Huber + Suhner	SF102K	16041	28/02/2019	28/04/2021
Cable	MegaPhase	TM18-N1N1-118	12842	09/05/2018	09/07/2020
Receiver	Rohde & Schwarz	FSW43	14830	28/12/2018	28/02/2020
Shielded enclosure	RAY PROOF	C.V2	1423		
Software	Nexio		0000		
Thermohygrometer	Testo	608-H1	7562	25/01/2019	25/03/2021
Thermohygrometer	Bioblock Scientific	Météostar	0963	25/01/2019	25/03/2021

BAT-EMC software version: V3.18.0.26


Blank cells = Permanent validity

TEST SETUP PHOTO(S)

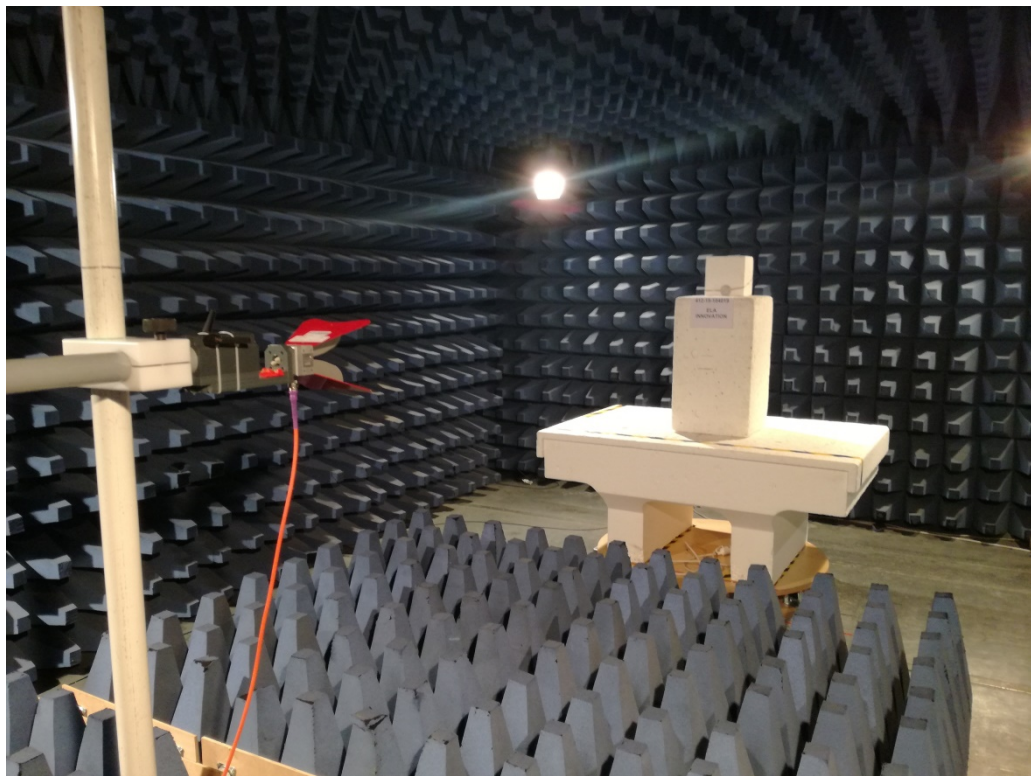


EFFECTIVE ISOTROPIC RADIATED POWER - GRAPH			
EIRP - LOW CHANNEL			EMI4544
EUT mode:	Continous modulated Tx		T (°C): 22.2
Test Date:	16/12/2019 09:39:55		H (%): 44.5
Test Operator:	OAT		P (hPa): 998

Description Sous-bande 1
 Fréquences: 2.4 GHz - 2.402 GHz (Mode analyseur) 10000 Points
 Réglages: RBW: 1MHz, VBW: 3MHz, Auto, Atténuation : Auto, Nombre de Balayages : 1, Preamp : Off, LN Preamp : Off, Preselecteur: Off
 Polarisation: Verticale
 Distance: 3 m

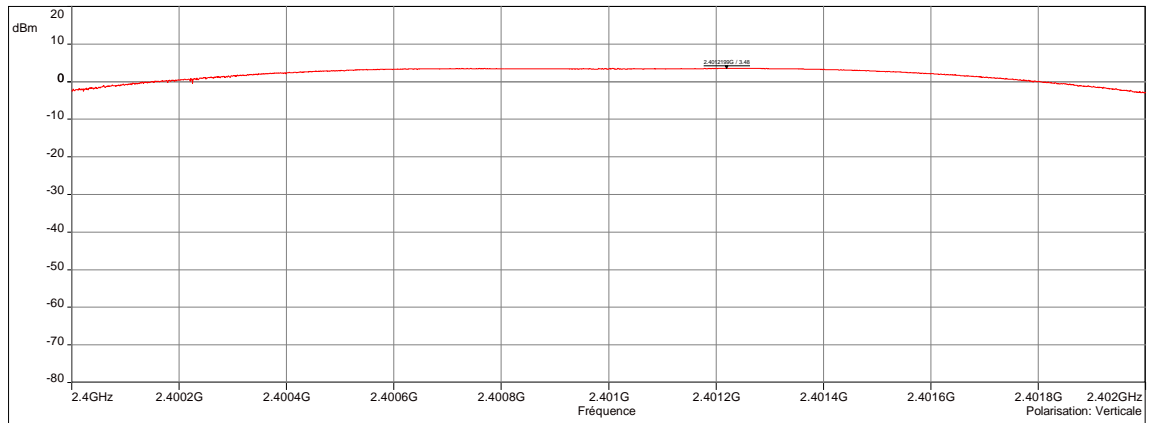

Description Sous-bande 2
 Fréquences: 2.4 GHz - 2.402 GHz (Mode analyseur) 10000 Points
 Réglages: RBW: 1MHz, VBW: 3MHz, Auto, Atténuation : Auto, Nombre de Balayages : 1, Preamp : Off, LN Preamp : Off, Preselecteur: Off
 Polarisation: Horizontale
 Distance: 3 m

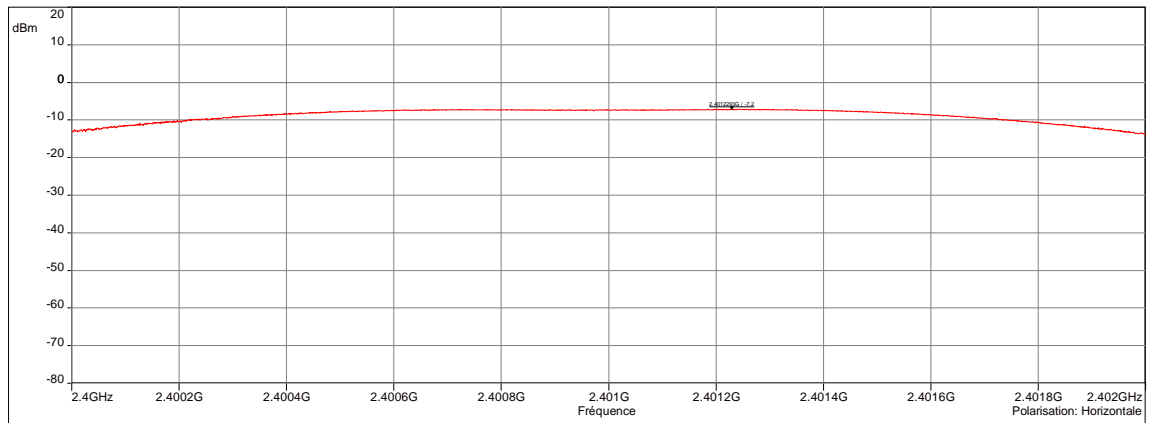


POSITION	FREQUENCIES	RBW	VBW	DETECTOR
Vertical	2.4GHz-2.402GHz	1MHz	3MHz	Peak
Horizontal	2.4GHz-2.402GHz	1MHz	3MHz	Peak

EUT modification(s): N/A

EFFECTIVE ISOTROPIC RADIATED POWER - TABULATED RESULTS			
EIRP - LOW CHANNEL			EMI4544
Frequency (MHz)	Polarization	EIRP Level (dBm)	Limit (dBm)
2401	Vertical	3.48	30
2401	Horizontal	-7.2	30


EFFECTIVE ISOTROPIC RADIATED POWER - GRAPH			
EIRP - MID CHANNEL			EMI4546
EUT mode:	Continous modulated Tx		T (°C): 22.2
Test Date:	16/12/2019 10:02:58		H (%): 44.5
Test Operator:	OAT		P (hPa): 998

Description Sous-bande 1
 Fréquences: 2.44 GHz - 2.442 GHz (Mode analyseur) 10000 Points
 Réglages: RBW: 1MHz, VBW: 3MHz, Auto, Atténuation : Auto, Nombre de Balayages : 1, Preamp : Off, LN Preamp : Off, Preselecteur: Off
 Polarisation: Verticale
 Distance: 3 m

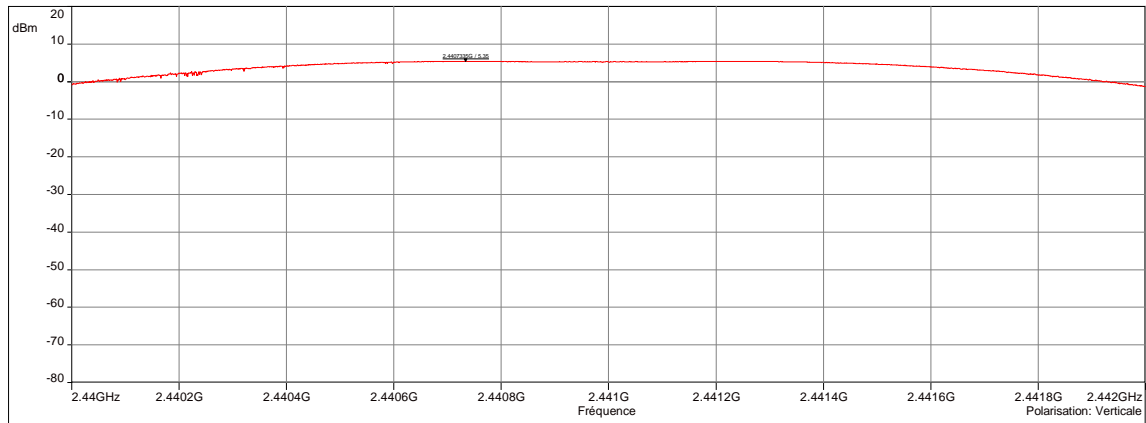

EIRP - BLUE PUCK Family - Mid Channel - 16/12/2019 10:02 - 4546

Description Sous-bande 2
 Fréquences: 2.44 GHz - 2.442 GHz (Mode analyseur) 10000 Points
 Réglages: RBW: 1MHz, VBW: 3MHz, Auto, Atténuation : Auto, Nombre de Balayages : 1, Preamp : Off, LN Preamp : Off, Preselecteur: Off
 Polarisation: Horizontale
 Distance: 3 m

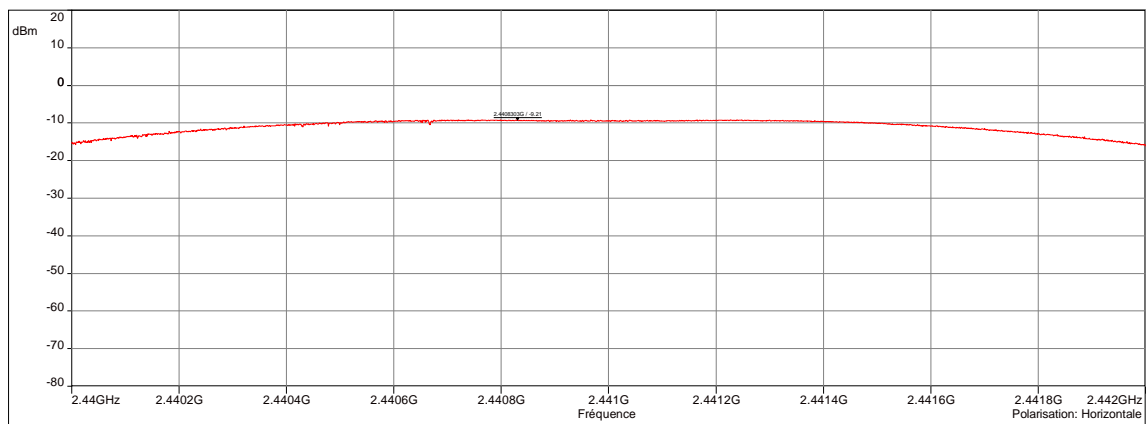

EIRP - BLUE PUCK Family - Mid Channel - 16/12/2019 10:02 - 4546


POSITION	FREQUENCIES	RBW	VBW	DETECTOR
Vertical	2.44GHz-2.442GHz	1MHz	3MHz	Peak
Horizontal	2.44GHz-2.442GHz	1MHz	3MHz	Peak

EUT modification(s): N/A


EFFECTIVE ISOTROPIC RADIATED POWER - TABULATED RESULTS			
EIRP - MID CHANNEL			EMI4546
Frequency (MHz)	Polarization	EIRP Level (dBm)	Limit (dBm)
2441	Vertical	5.35	30
2441	Horizontal	-9.21	30

EFFECTIVE ISOTROPIC RADIATED POWER - GRAPH			
EIRP - HIGH CHANNEL			EMI4545
EUT mode:	Continous modulated Tx		T (°C): 22.2
Test Date:	16/12/2019 09:54:28		H (%): 44.5
Test Operator:	OAT		P (hPa): 998

Description Sous-bande 1
 Fréquences: 2.48 GHz - 2.482 GHz (Mode analyseur) 10000 Points
 Réglages: RBW: 1MHz, VBW: 3MHz, Auto, Atténuation : Auto, Nombre de Balayages : 1, Preamp : Off, LN Preamp : Off, Preselecteur: Off
 Polarisation: Verticale
 Distance: 3 m

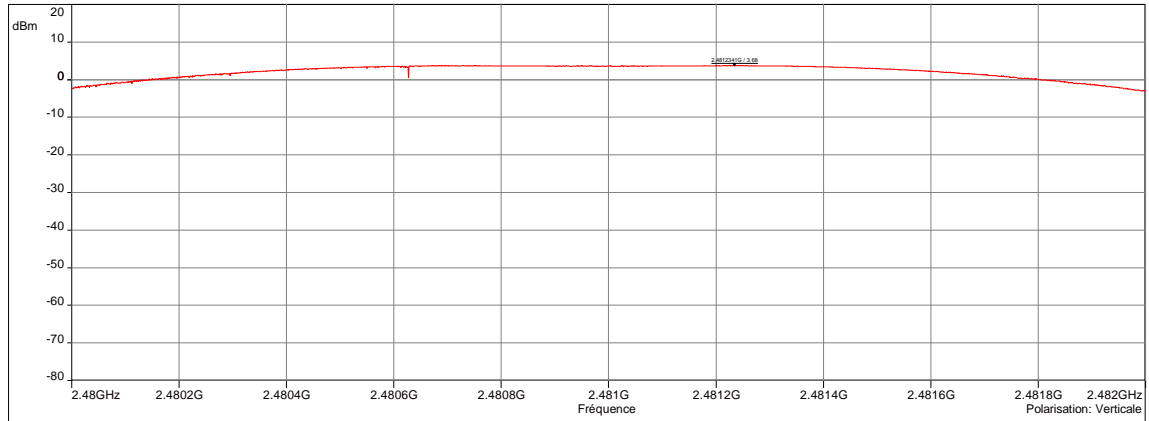

Description Sous-bande 2
 Fréquences: 2.48 GHz - 2.482 GHz (Mode analyseur) 10000 Points
 Réglages: RBW: 1MHz, VBW: 3MHz, Auto, Atténuation : Auto, Nombre de Balayages : 1, Preamp : Off, LN Preamp : Off, Preselecteur: Off
 Polarisation: Horizontale
 Distance: 3 m

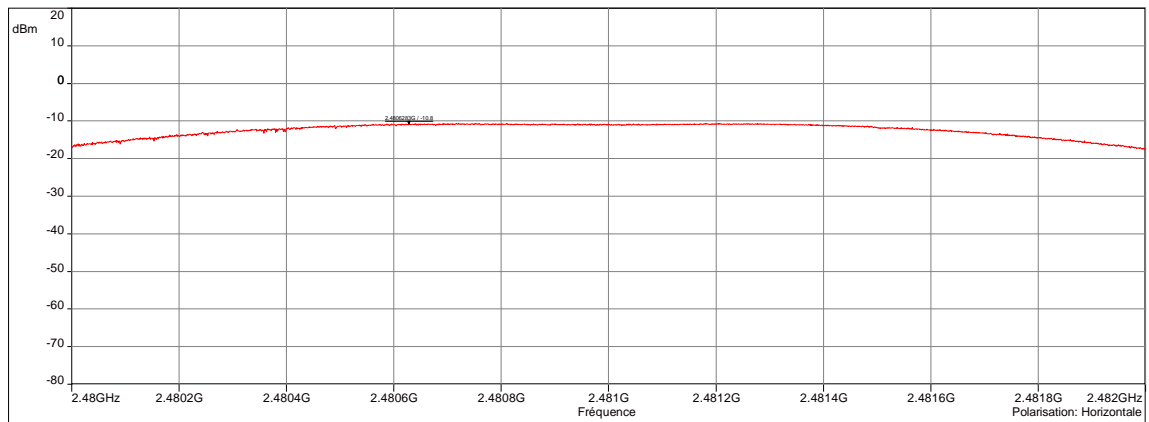

POSITION	FREQUENCIES	RBW	VBW	DETECTOR
Vertical	2.48GHz-2.482GHz	1MHz	3MHz	Peak
Horizontal	2.48GHz-2.482GHz	1MHz	3MHz	Peak

EUT modification(s): N/A

EFFECTIVE ISOTROPIC RADIATED POWER - TABULATED RESULTS			
EIRP - HIGH CHANNEL			EMI4545
Frequency (MHz)	Polarization	EIRP Level (dBm)	Limit (dBm)
2481	Vertical	3.68	30
2481	Horizontal	-10.8	30

b) EXTREMES TESTS CONDITIONS

Reference standard:	FCC part 15 Radio part 15.247 and RSS-247
Test method:	ANSI C63.10: 2013
General test setup: EUT is set inside the climatic enclosure. EIRP measurements are repeated in extreme test conditions with the power levels correlated with the maximum effective radiated power measured in normal conditions.	

TEST CASE	EUT MODE	SEVERITY	RESULT TAB.	VERDICT
Low channel / 25°C / 3.0Vdc	Tx-CW	1W (30dBm)	EMI4499	PASS
Low channel / 25°C / 2.6Vdc	Tx-CW	1W (30dBm)	EMI4500	PASS
Mid channel / 25°C / 3.0Vdc	Tx-CW	1W (30dBm)	EMI4501	PASS
Mid channel / 25°C / 2.6Vdc	Tx-CW	1W (30dBm)	EMI4601	PASS
High channel / 25°C / 3.0dc	Tx-CW	1W (30dBm)	EMI4602	PASS
High channel / 25°C / 2.6Vdc	Tx-CW	1W (30dBm)	EMI4603	PASS
Low channel / -40°C / 3.0Vdc	Tx-CW	1W (30dBm)	EMI4604	PASS
Low channel / -40°C / 2.6Vdc	Tx-CW	1W (30dBm)	EMI4605	PASS
Mid channel / -40°C / 3.0Vdc	Tx-CW	1W (30dBm)	EMI4606	PASS
Mid channel / -40°C / 2.6Vdc	Tx-CW	1W (30dBm)	EMI4710	PASS
High channel / -40°C / 3.0Vdc	Tx-CW	1W (30dBm)	EMI4711	PASS
High channel / -40°C / 2.6Vdc	Tx-CW	1W (30dBm)	EMI4712	PASS
Low channel / 85°C / 3.0Vdc	Tx-CW	1W (30dBm)	EMI4713	PASS
Low channel / 85°C / 2.6Vdc	Tx-CW	1W (30dBm)	EMI4714	PASS
Mid channel / 85°C / 3.0Vdc	Tx-CW	1W (30dBm)	EMI4715	PASS
Mid channel / 85°C / 2.6Vdc	Tx-CW	1W (30dBm)	EMI4716	PASS
High channel / 85°C / 3.0Vdc	Tx-CW	1W (30dBm)	EMI4717	PASS
High channel / 85°C / 2.6Vdc	Tx-CW	1W (30dBm)	EMI4718	PASS

LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	24.1 °C
Relative Humidity	20 to 75 %	51.5 %
Atmospheric pressure	N/A	1002 hPa
Test method deviation: N/A		
Supplementary information: EUT power supply is replaced by a stabilized power supply.		

TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
Attenuator	Radiall	R412710124	16491	25/06/2019	25/08/2021
Cable	N	3m	16426	04/05/2019	04/07/2021
Cable	Huber + Suhner	SF102K	16041	28/02/2019	28/04/2021
Climatic enclosure	CLIMATS	EXCAL 7714-HA	14261	19/09/2019	19/11/2020
Multimeter	FLUKE	8808A	12446	20/07/2019	20/09/2020
Power supply	TTi	TSX-1820P	4365		
Spectrum analyzer	Rohde & Schwarz	FSW43	14830	28/12/2018	28/02/2020
Thermohygrometer	Testo	608-H2	12268	27/11/2017	27/01/2020
Thermometer contactless	GHM Greisinger	GMH 3710	12968	11/02/2019	11/04/2020

Blank cells = Permanent validity

TEST SETUP PHOTO(S)



EFFECTIVE ISOTROPIC RADIATED POWER - TABULATED RESULTS				
TEST CASE	FREQUENCY	LEVEL(dBm)	LIMIT	RESULT TAB.
Low channel / 25°C / 3.0Vdc	2401 MHz	3.48	1W (30dBm)	EMI4499
Low channel / 25°C / 2.6Vdc	2401 MHz	3.49	1W (30dBm)	EMI4500
Mid channel / 25°C / 3.0Vdc	2441 MHz	5.35	1W (30dBm)	EMI4501
Mid channel / 25°C / 2.6Vdc	2441 MHz	5.37	1W (30dBm)	EMI4601
High channel / 25°C / 3.0dc	2481 MHz	3.68	1W (30dBm)	EMI4602
High channel / 25°C / 2.6Vdc	2481 MHz	3.70	1W (30dBm)	EMI4603
Low channel / -40°C / 3.0Vdc	2401 MHz	5.13	1W (30dBm)	EMI4604
Low channel / -40°C / 2.6Vdc	2401 MHz	5.18	1W (30dBm)	EMI4605
Mid channel / -40°C / 3.0Vdc	2441 MHz	5.16	1W (30dBm)	EMI4606
Mid channel / -40°C / 2.6Vdc	2441 MHz	5.21	1W (30dBm)	EMI4710
High channel / -40°C / 3.0Vdc	2481 MHz	5.20	1W (30dBm)	EMI4711
High channel / -40°C / 2.6Vdc	2481 MHz	5.26	1W (30dBm)	EMI4712
Low channel / 85°C / 3.0Vdc	2401 MHz	2.27	1W (30dBm)	EMI4713
Low channel / 85°C / 2.6Vdc	2401 MHz	2.27	1W (30dBm)	EMI4714
Mid channel / 85°C / 3.0Vdc	2441 MHz	4.10	1W (30dBm)	EMI4715
Mid channel / 85°C / 2.6Vdc	2441 MHz	4.10	1W (30dBm)	EMI4716
High channel / 85°C / 3.0Vdc	2481 MHz	2.13	1W (30dBm)	EMI4717
High channel / 85°C / 2.6Vdc	2481 MHz	2.14	1W (30dBm)	EMI4718

EUT MODIFICATIONS	OPERATOR	TEST DATE	RESULT TAB.
N/A	OAT	18/12/2019	-

9.6.20db & 6dB Bandwidth For Digitally Modulation Systems

Reference standard:	FCC part 15 Radio part 15.247 and RSS-247
Test method:	ANSI C63.10: 2013
<p>Test description: Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.</p> <p>EUT is connected to the measuring receiver via 50Ω attenuator(s). Tests are done in max-hold mode in order to capture all channels.</p>	

TESTED CHANNEL	RESULT	SEVERITY	RESULT TAB.	VERDICT
6dB Bandwidth - Low channel	671.3kHz	>500kHz	EMI4567	PASS
6dB Bandwidth - Mid channel	684.3kHz	>500kHz	EMI4568	PASS
6dB Bandwidth - High channel	669.4kHz	>500kHz	EMI4569	PASS
20dB Bandwidth - Low channel	1.229 MHz	>500kHz	EMI4467	PASS
20dB Bandwidth - Mid channel	1.217 MHz	>500kHz	EMI4468	PASS
20dB Bandwidth - High channel	1.238 MHz	>500kHz	EMI4469	PASS


LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	24.1 °C
Relative Humidity	20 to 75 %	51.5 %
Atmospheric pressure	N/A	1002 hpa
TEST METHOD DEVIATION: N/A		
Supplementary information: EUT power supply is replaced by a stabilized power supply.		

TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
Attenuator	Radiall	R412710124	16491	25/06/2019	25/08/2021
Cable	N	3m	16426	04/05/2019	04/07/2021
Cable	Huber + Suhner	SF102K	16041	28/02/2019	28/04/2021
Multimeter	FLUKE	8808A	12446	20/07/2019	20/09/2020
Power supply	TTi	TSX-1820P	4365		
Spectrum analyzer	Rohde & Schwarz	FSW43	14830	28/12/2018	28/02/2020
Thermohygrometer	Testo	608-H2	12268	27/11/2017	27/01/2020


Blank cells = Permanent validity

TEST SETUP PHOTO(S)



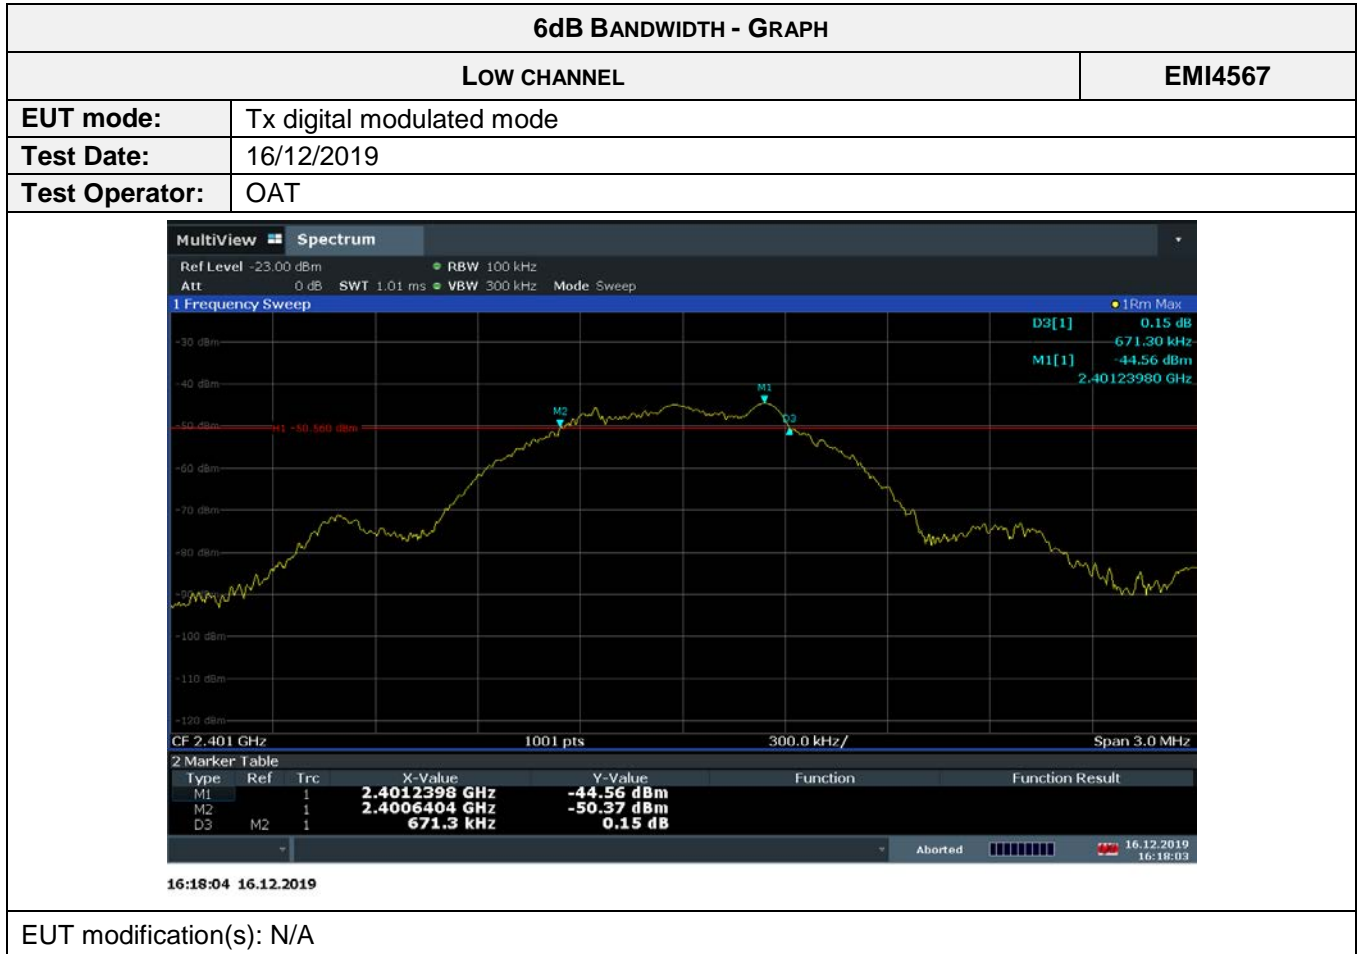


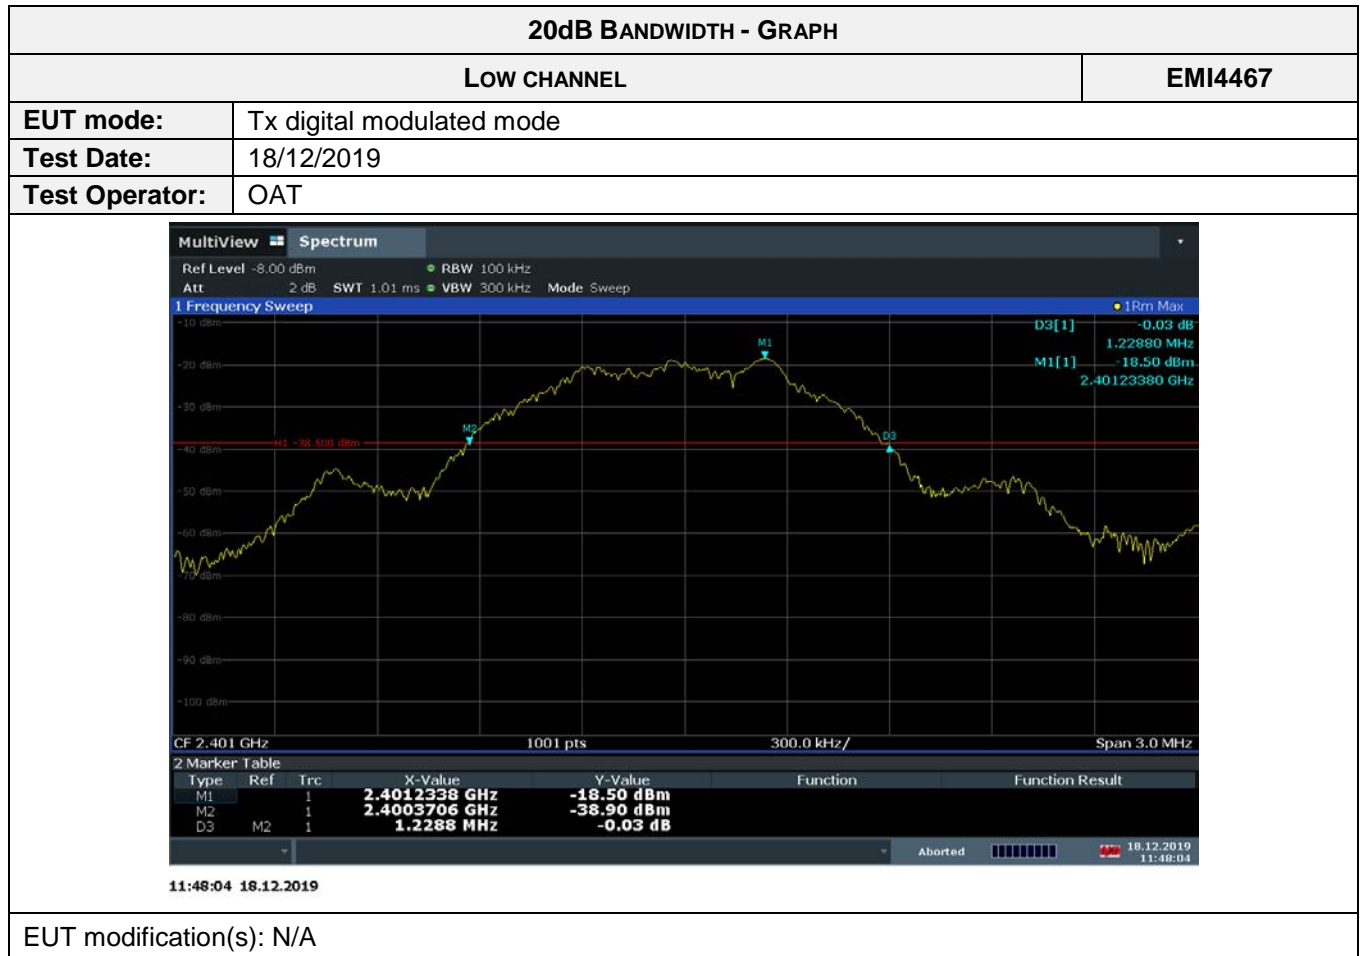
6dB BANDWIDTH - TABULATED RESULTS			
LOW CHANNEL			EMI4567
U_{Start} (start of the test):	3Vdc	U_{End} (end of the test):	3Vdc
Voltage drop:	0%	Limit:	+/- 1%
f_{Low} (MHz)	f_{High} (MHz)	Result (f_{high}-f_{low})	Limit
-	-	671.3 kHz	>500kHz

6dB BANDWIDTH - GRAPH	
MID CHANNEL	
EMI4568	
EUT mode:	Tx digital modulated mode
Test Date:	16/12/2019
Test Operator:	OAT
	
15:39:59 16.12.2019	
EUT modification(s): N/A	


6DB BANDWIDTH - TABULATED RESULTS			
MID CHANNEL			EMI4568
U_{Start} (start of the test):	3Vdc	U_{End} (end of the test):	3Vdc
Voltage drop:	0%	Limit:	+/- 1%
f_{Low}	f_{High}	Result (f_{high}-f_{low})	Limit
-	-	684.3kHz	>500kHz

6dB BANDWIDTH - GRAPH	
HIGH CHANNEL	
EMI4569	
EUT mode:	Tx digital modulated mode
Test Date:	16/12/2019
Test Operator:	OAT
 <p>16:15:50 16.12.2019</p>	
EUT modification(s): N/A	


6dB BANDWIDTH - TABULATED RESULTS			
HIGH CHANNEL			EMI4569
U_{Start} (start of the test):	3Vdc	U_{End} (end of the test):	3Vdc
Voltage drop:	0%	Limit:	+/- 1%
f_{Low}	f_{High}	Result (f_{high}-f_{low})	Limit
-	-	669.4kHz	>500kHz



20dB BANDWIDTH - TABULATED RESULTS			
LOW CHANNEL			EMI4467
U_{Start} (start of the test):	3.0Vdc	U_{End} (end of the test):	3.0Vdc
Voltage drop:	0%	Limit:	+/- 1%
f_{Low} (MHz)	f_{High} (MHz)	Result (f_{high}-f_{low})	Limit
-	-	1.229 MHz	>500kHz

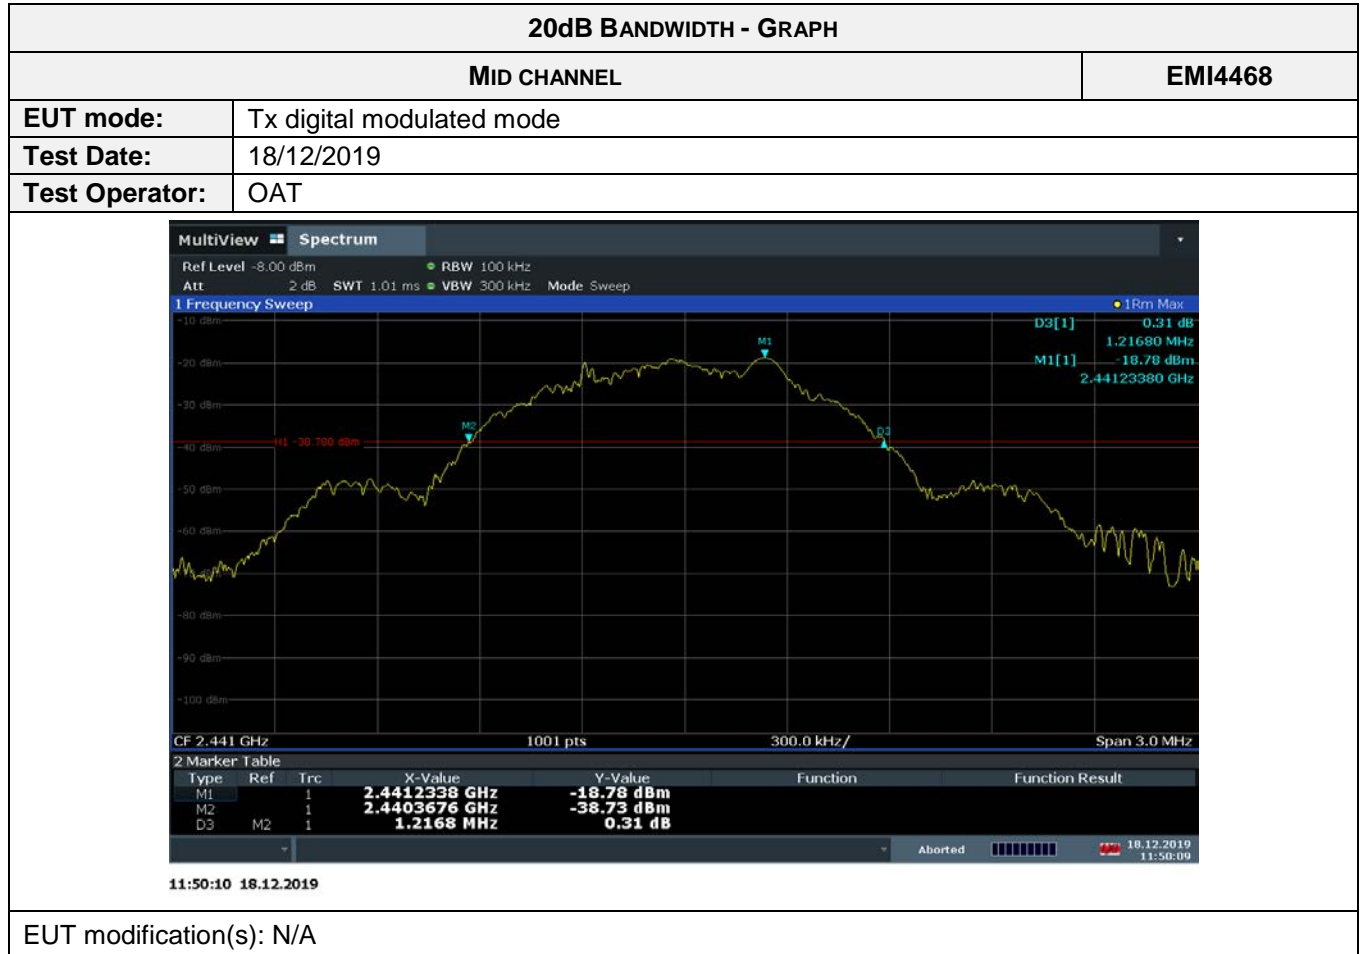

20dB BANDWIDTH - TABULATED RESULTS			
MID CHANNEL			EMI4468
U_{Start} (start of the test):	3.0Vdc	U_{End} (end of the test):	3.0Vdc
Voltage drop:	0%	Limit:	+/- 1%
f_{Low}	f_{High}	Result (f_{high}-f_{low})	Limit
-	-	1.217 MHz	>500kHz

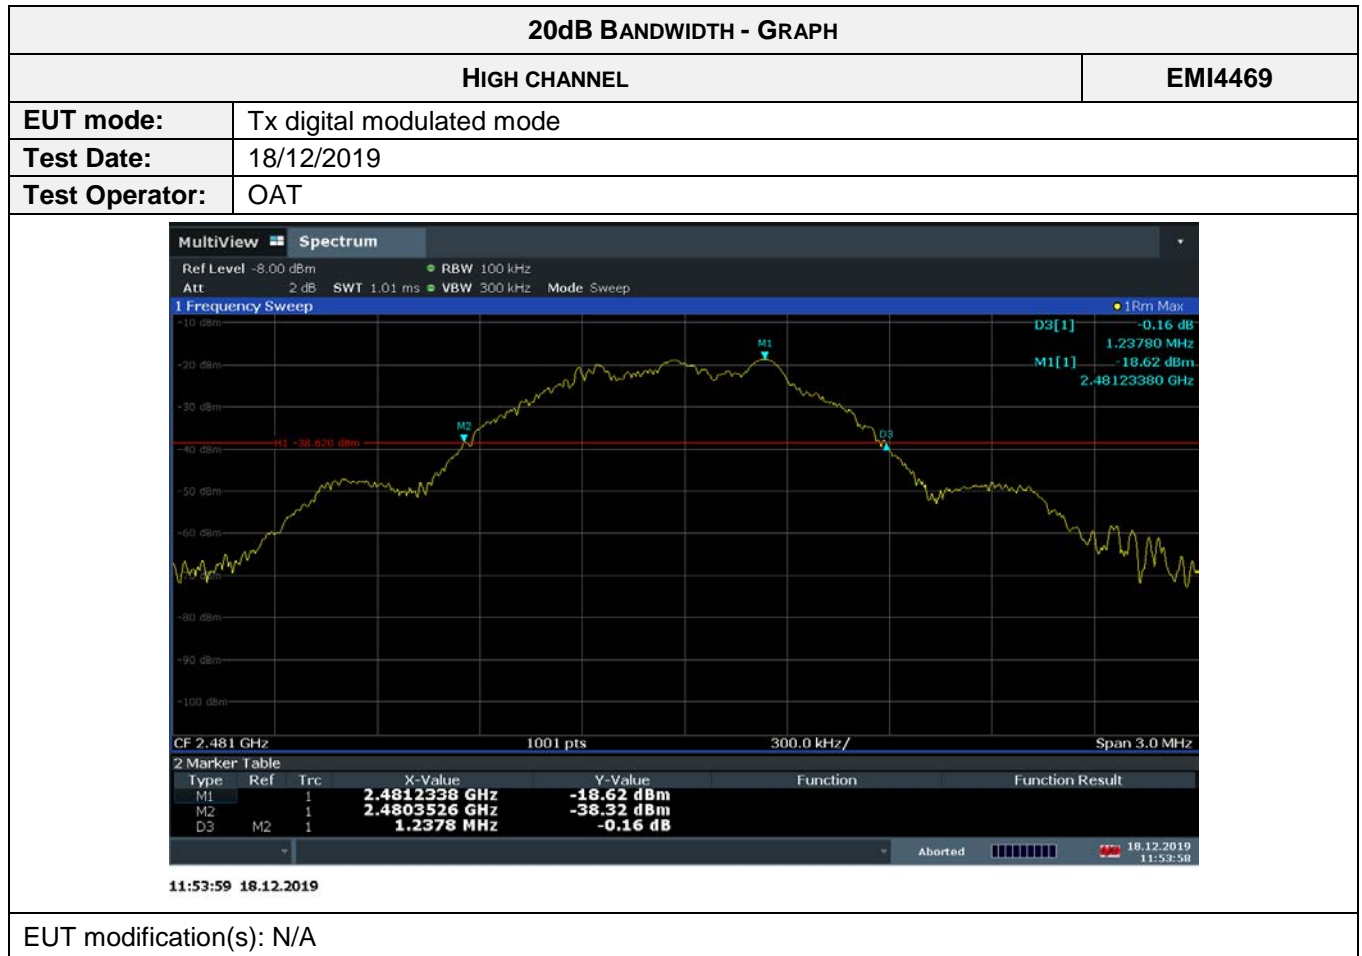

20dB BANDWIDTH - TABULATED RESULTS			
HIGH CHANNEL			EMI4469
U_{Start} (start of the test):	3.0Vdc	U_{End} (end of the test):	3.0Vdc
Voltage drop:	0%	Limit:	+/- 1%
f_{Low}	f_{High}	Result (f_{high}-f_{low})	Limit
-	-	1.238 MHz	>500kHz

9.7. Power spectral density

Reference standard:	FCC part 15 Radio part 15.247 and RSS-247
Test method:	FCC part 15.247 and RSS-247
Test description: e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density. EUT is set on an insulating support at 150cm above the ground reference plane. Measurement are done on a normalized test site by the substitution method. The test antenna is oriented in the two polarizations (vertical and horizontal), and the product is rotated at 360° in the horizontal plane (See photo(s) for initial position of the EUT(0°)). If applicable the test antenna was raised and lowered through the specified range of height until a maximum signal level is detected. For portable equipments a research of maximum level is done on the 3 axes. Only the highest levels are recorded.	

TESTED CHANNEL	RESULT	SEVERITY	RESULT TAB.	VERDICT
PSD/3KHz - Low Channel	-0.129dBm/3kHz	8dBm/3kHz	EMI4559	PASS
PSD/3KHz - Mid Channel	-1.7dBm/3KHz	8dBm/3kHz	EMI4556	PASS
PSD/3KHz - High Channel	-0.14dBm/3KHz	8dBm/3kHz	EMI4558	PASS


LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	See Graph(es)
Relative Humidity	20 to 75 %	See Graph(es)
Atmospheric pressure	N/A	See Graph(es)
Test method deviation: N/A		
Supplementary information: N/A		


TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
Antenna	ETS-Lindgren	3117	5456	24/07/2019	24/09/2022
Attenuator	EMITECH	SUB.V2-H	14495	25/09/2019	25/11/2020
Attenuator	EMITECH	SUB.V2-V	14496	25/09/2019	25/11/2020
Cable	MegaPhase	N-3m	14852	29/10/2018	29/12/2020
Cable	MegaPhase	N-5m	14855	12/02/2018	12/04/2020
Cable	Huber + Suhner	SF102K	16041	28/02/2019	28/04/2021
Cable	MegaPhase	TM18-N1N1-118	12842	09/05/2018	09/07/2020
Receiver	Rohde & Schwarz	FSW43	14830	28/12/2018	28/02/2020
Shielded enclosure	RAY PROOF	C.V2	1423		
Software	Nexio		0000		
Thermohygrometer	Testo	608-H1	7562	25/01/2019	25/03/2021
Thermohygrometer	Bioblock Scientific	Météostar	0963	25/01/2019	25/03/2021

BAT-EMC software version: V3.18.0.26


Blank cells = Permanent validity

TEST SETUP PHOTO(S)

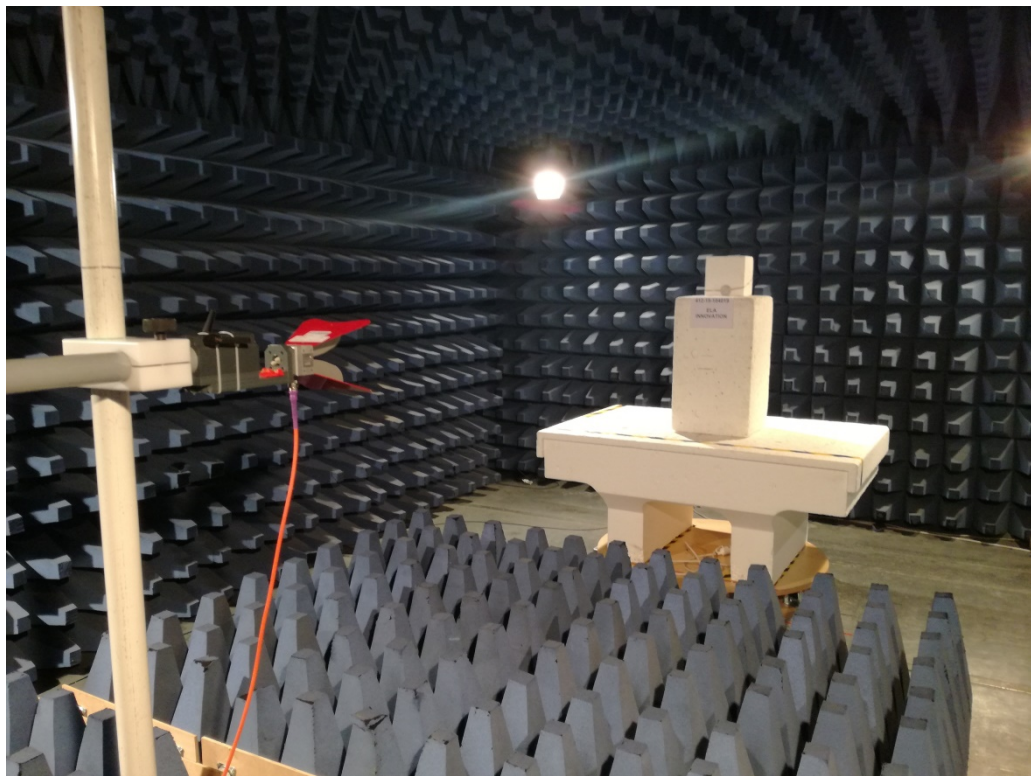


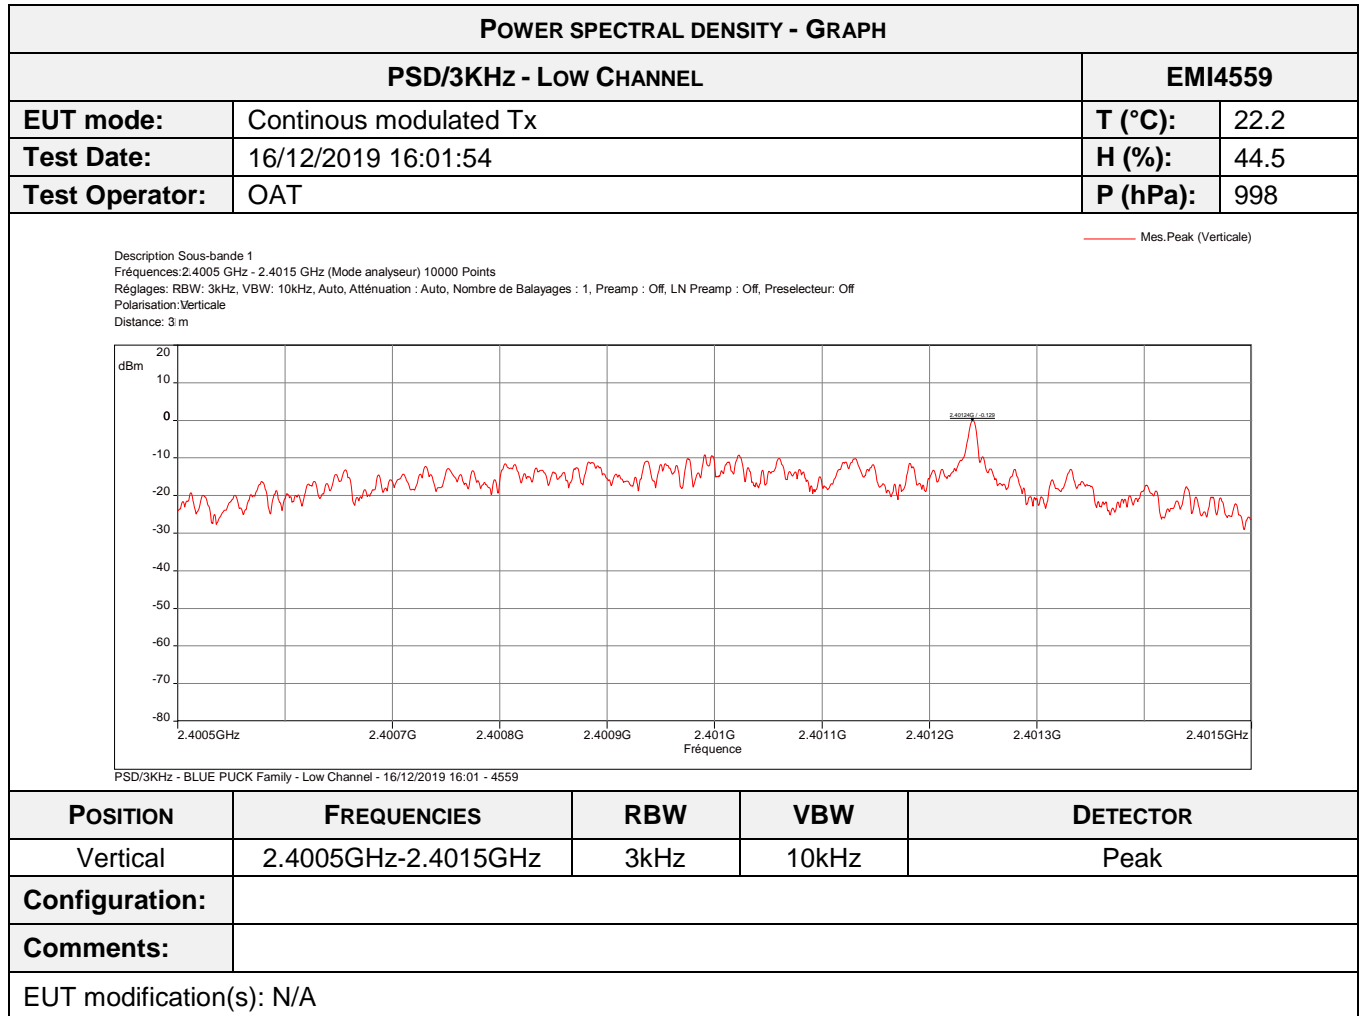

POWER SPECTRAL DENSITY - TABULATED RESULTS			
PSD/3KHz - LOW CHANNEL			EMI4559
U_{Start} (start of the test):	N/P	U_{End} (end of the test):	N/P
Voltage drop:	N/P	Limit:	+/- 5%
Frequency (MHz)	Polarization	Level	Limit
2401	Vertical	-0.129dBm/3kHz	8dBm/3kHz

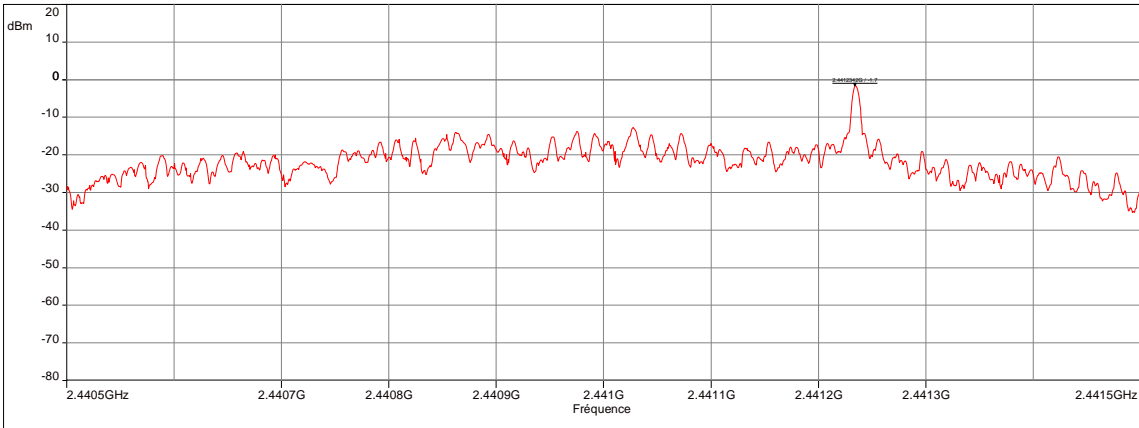POWER SPECTRAL DENSITY - GRAPH					
PSD/3KHZ - MID CHANNEL				EMI4556	
EUT mode:	Continuous modulated Tx			T (°C):	22.2
Test Date:	16/12/2019 15:48:08			H (%):	44.5
Test Operator:	OAT			P (hPa):	998
<p>Description Sous-bande 1 Fréquences: 2.4405 GHz - 2.4415 GHz (Mode analyseur) 10000 Points Réglages: RBW: 3kHz, VBW: 10kHz, Auto, Atténuation : Auto, Nombre de Balayages : 1, Preamp : Off, LN Preamp : Off, Preselecteur: Off Polarisation: Verticale Distance: 3 m</p> <p style="text-align: right;">— Mes. Peak (Verticale)</p>  <p>PSD/3KHz - BLUE PUCK Family - Mid Channel - 16/12/2019 15:48 - 4556</p>					
POSITION	FREQUENCIES	RBW	VBW	DETECTOR	
Vertical	2.4405GHz-2.4415GHz	3kHz	10kHz	Peak	
Configuration:					
Comments:					
EUT modification(s): N/A					

POWER SPECTRAL DENSITY - TABULATED RESULTS			
PSD/3KHZ - MID CHANNEL			EMI4556
U_{Start} (start of the test):	N/P	U_{End} (end of the test):	N/P
Voltage drop:	N/P	Limit:	+/- 5%
Frequency (MHz)	Polarization	Level	Limit
2441	Vertical	-1.7dBm/3kHz	8dBm/3kHz

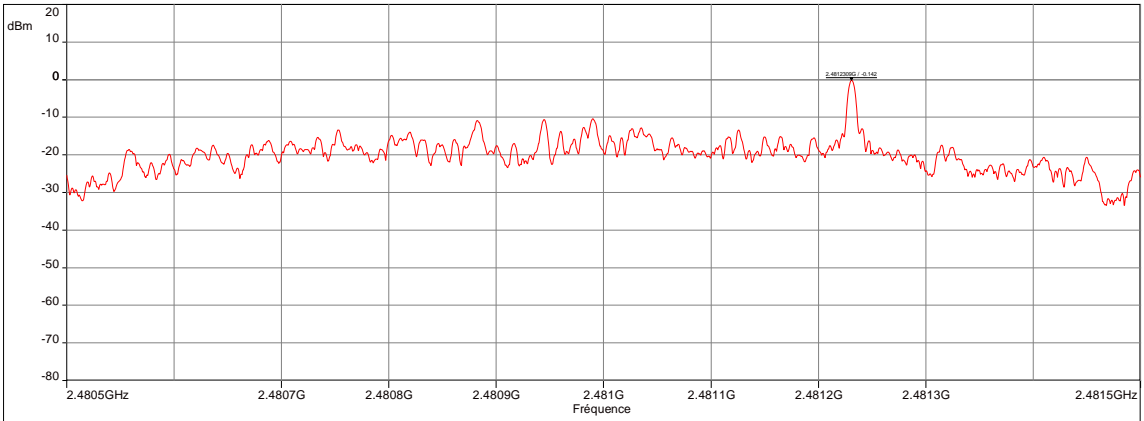POWER SPECTRAL DENSITY - GRAPH					
PSD/3KHz - HIGH CHANNEL				EMI4558	
EUT mode:	Continuous modulated Tx			T (°C):	22.2
Test Date:	16/12/2019 16:06:40			H (%):	44.5
Test Operator:	OAT			P (hPa):	998
<p>Description Sous-bande 1 Fréquences: 2.4805 GHz - 2.4815 GHz (Mode analyseur) 10000 Points Réglages: RBW: 3kHz, VBW: 10kHz, Auto, Atténuation : Auto, Nombre de Balayages : 1, Preamp : Off, LN Preamp : Off, Preselecteur: Off Polarisation: Verticale Distance: 3 m</p> <p style="text-align: right;">— Mes. Peak (Verticale)</p>  <p>PSD/3KHz - BLUE PUCK Family - High Channel - 16/12/2019 16:06 - 4558</p>					
POSITION	FREQUENCIES	RBW	VBW	DETECTOR	
Vertical	2.4805GHz-2.4815GHz	3kHz	10kHz	Peak	
Configuration:					
Comments:					
EUT modification(s): N/A					

POWER SPECTRAL DENSITY - TABULATED RESULTS			
PSD/3KHz - HIGH CHANNEL			EMI4558
U_{Start} (start of the test):	N/P	U_{End} (end of the test):	N/P
Voltage drop:	N/P	Limit:	+/- 5%
Frequency (MHz)	Polarization	Level	Limit
2481	Vertical	-0.14dBm/3kHz	8dBm/3kHz

9.8. Occupied Bandwidth

Reference standard:	FCC part 15 Radio part 15.247 and RSS-247
Test method:	ANSI C63.10: 2013
<p>Test description: The occupied bandwidth (OBW) is the Frequency Range in which 99 % of the total mean power of a given emission falls. The residual part of the total power being denoted as β, which, in cases of symmetrical spectra, splits up into $\beta/2$ on each side of the spectrum. Unless otherwise specified, $\beta/2$ is taken as 0,5 %.</p> <p>The maximum occupied bandwidth includes all associated side bands above the appropriate emissions level and the frequency error or drift under extreme test conditions.</p> <p>EUT is connected to the measuring receiver via 50Ω attenuator(s).</p>	

TESTED CHANNEL	OBW	SEVERITY	RESULT TAB.	VERDICT
Low channel	1.0821 MHz	> 500kHz	EMI4502	PASS
Mid channel	1.0851 MHz	> 500kHz	EMI4610	PASS
High channel	1.0682 MHz	> 500kHz	EMI4609	PASS


LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	24.1 °C
Relative Humidity	20 to 75 %	51.5 %
Atmospheric pressure	N/A	1002 hPa
Test method deviation: N/A		
Supplementary information: EUT power supply is replaced by a stabilized power supply.		

TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
Attenuator	Radiall	R412710124	16491	25/06/2019	25/08/2021
Cable	N	3m	16426	04/05/2019	04/07/2021
Cable	Huber + Suhner	SF102K	16041	28/02/2019	28/04/2021
Climatic enclosure	CLIMATS	EXCAL 7714-HA	14261	19/09/2019	19/11/2020
Multimeter	FLUKE	8808A	12446	20/07/2019	20/09/2020
Power supply	TTi	TSX-1820P	4365		
Receiver	Rohde & Schwarz	FSW43	14830	28/12/2018	28/02/2020
Thermohygrometer	Testo	608-H2	12268	27/11/2017	27/01/2020
Thermometer contactless	GHM Greisinger	GMH 3710	12968	11/02/2019	11/04/2020


Blank cells = Permanent validity

TEST SETUP PHOTO(S)




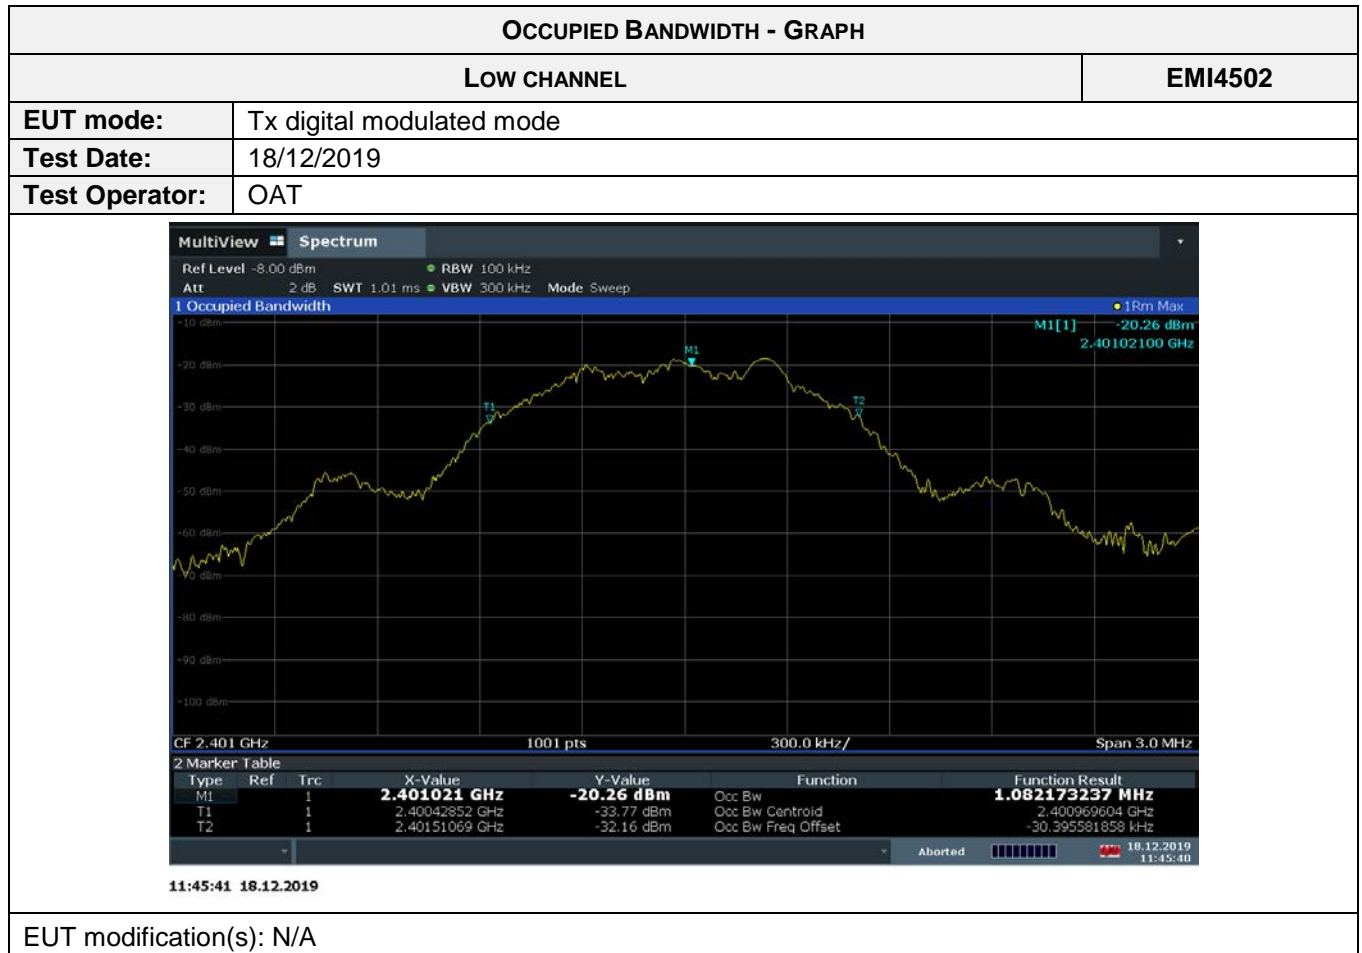

OCCUPIED BANDWIDTH - TABULATED RESULTS			
LOW CHANNEL			EMI4502
U_{Start} (start of the test):	3Vdc	U_{End} (end of the test):	3Vdc
Voltage drop:	0%	Limit:	+/- 1%
f_{Low} (MHz)	f_{High} (MHz)	OBW (f_{high}-f_{low})	Limit
2400.428	2401.510	1.0821 MHz	>500kHz

OCCUPIED BANDWIDTH - GRAPH	
MID CHANNEL	
EMI4610	
EUT mode:	Tx digital modulated mode
Test Date:	18/12/2019
Test Operator:	OAT
 <p>11:50:57 18.12.2019</p>	
EUT modification(s): N/A	

OCCUPIED BANDWIDTH - TABULATED RESULTS			
MID CHANNEL			EMI4610
U_{Start} (start of the test):	3Vdc	U_{End} (end of the test):	3Vdc
Voltage drop:	0%	Limit:	+/- 1%
f_{Low} (MHz)	f_{High} (MHz)	OBW (f_{high}-f_{low})	Limit
2440.428	2441.513	1.0851 MHz	>500kHz

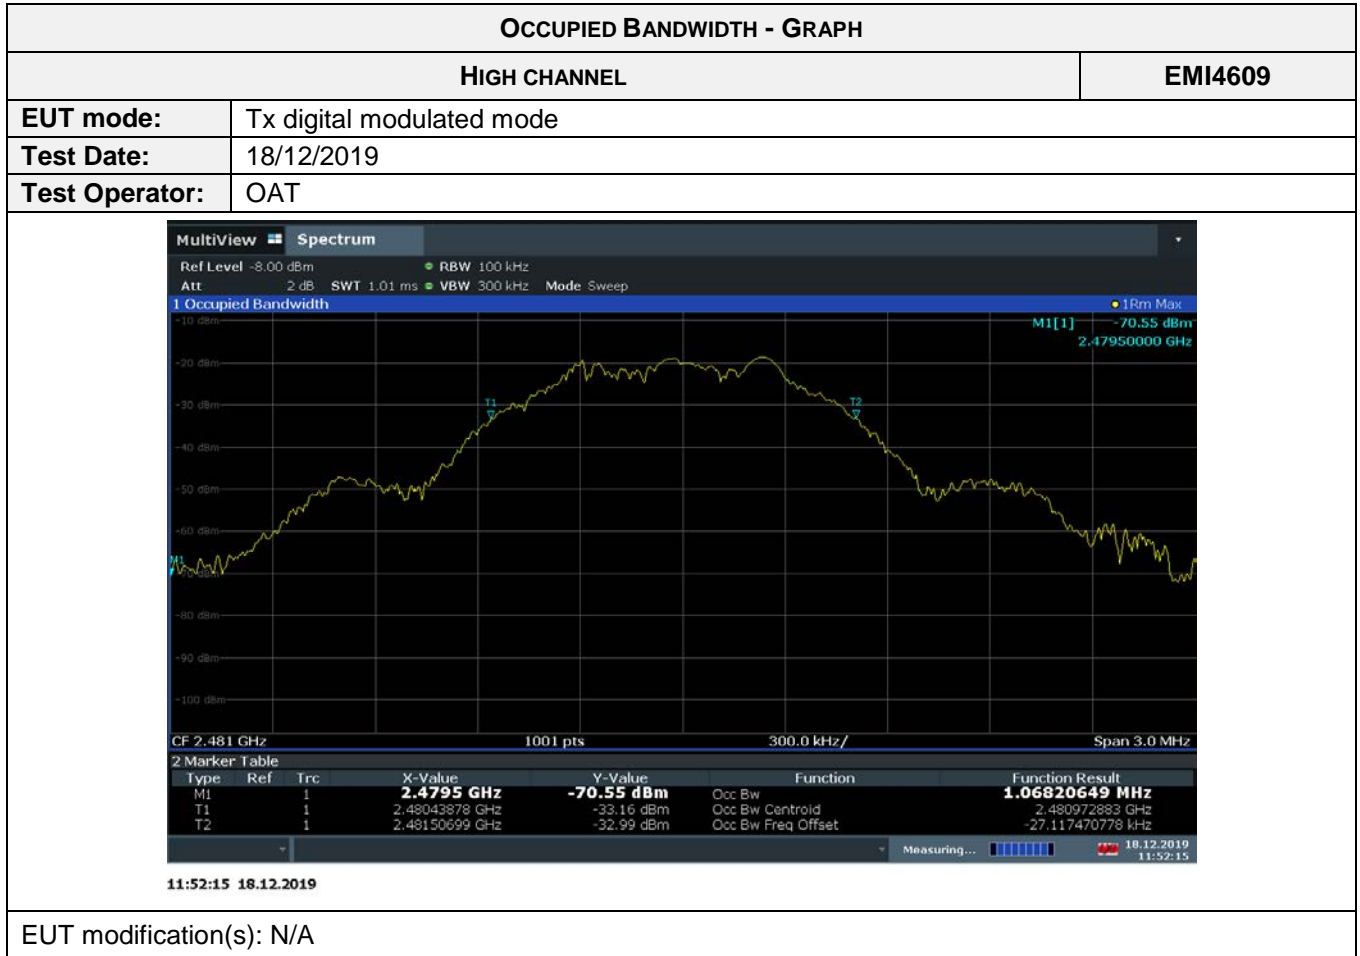

OCCUPIED BANDWIDTH - TABULATED RESULTS			
HIGH CHANNEL			EMI4609
U_{Start} (start of the test):	3Vdc	U_{End} (end of the test):	3Vdc
Voltage drop:	0%	Limit:	+/- 1%
f_{Low} (MHz)	f_{High} (MHz)	OBW (f_{high}-f_{low})	Limit
2480.439	2481.507	1.0682 MHz	>500kHz

9.9. Measurement of Frequency Stability

Reference standard:	FCC part 15 Radio part 15.215 c)
Test method:	FCC part 15 Radio part 15.215 c) and RSS Gen
<p>Test description: The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.</p> <p>EUT is set inside the climatic enclosure. It is connected to the measuring receiver via 50Ω attenuator(s). RBW=100Hz</p>	

TEST CASE	EUT MODE	SEVERITY	RESULT TAB.	VERDICT
Low channel / 25°C/ 3.0Vdc	Tx-CW	2400MHz <F< 2483.5MHz	EMI4503	PASS
Low channel / 25°C/ 2.6Vdc	Tx-CW		EMI4504	PASS
Low channel / -40°C/ 3.0Vdc	Tx-CW		EMI4611	PASS
Low channel / -40°C/ 2.6Vdc	Tx-CW		EMI4612	PASS
Low channel / 85°C/ 3.0Vdc	Tx-CW		EMI4613	PASS
Low channel / 85°C/ 2.6Vdc	Tx-CW		EMI4614	PASS
High channel / 25°C/ 3.0Vdc	Tx-CW		EMI4616	PASS
High channel / 25°C/ 2.6Vdc	Tx-CW		EMI4617	PASS
High channel / -40°C/ 3.0Vdc	Tx-CW		EMI4618	PASS
High channel / -40°C/ 2.6Vdc	Tx-CW		EMI4619	PASS
High channel / 85°C/ 3.0Vdc	Tx-CW		EMI4620	PASS
High channel / 85°C/ 2.6Vdc	Tx-CW		EMI4621	PASS

LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	24.1 °C
Relative Humidity	20 to 75 %	51.5 %
Atmospheric pressure	N/A	1002 hPa
Test method deviation: N/A		
Supplementary information: EUT power supply is replaced by a stabilized power supply.		

TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
Attenuator	Radiall	R412710124	16491	25/06/2019	25/08/2021
Cable	N	3m	16426	04/05/2019	04/07/2021
Cable	Huber + Suhner	SF102K	16041	28/02/2019	28/04/2021
Climatic enclosure	CLIMATS	EXCAL 7714-HA	14261	19/09/2019	19/11/2020
Multimeter	FLUKE	8808A	12446	20/07/2019	20/09/2020
Power supply	TTi	TSX-1820P	4365		
Spectrum analyzer	Rohde & Schwarz	FSW43	14830	28/12/2018	28/02/2020
Thermohygrometer	Testo	608-H2	12268	27/11/2017	27/01/2020
Thermometer contactless	GHM Greisinger	GMH 3710	12968	11/02/2019	11/04/2020

Blank cells = Permanent validity

TEST SETUP PHOTO(S)



FREQUENCY ERROR - TABULATED RESULTS				
TEST CASE	FREQUENCY (MHZ)	FREQUENCY ERROR (KHZ)	LIMIT	RESULT TAB.
Low channel / 25°C/ 3.0Vdc	2400.975385	N/A	2400MHz <F< 2483.5MHz	EMI4503
Low channel / 25°C/ 2.6Vdc	2400.975210	-0.175		EMI4504
Low channel / -40°C/ 3.0Vdc	2400.947694	-27.691		EMI4611
Low channel / -40°C/ 2.6Vdc	2400.947619	-27.766		EMI4612
Low channel / 85°C/ 3.0Vdc	2400.991640	16.255		EMI4613
Low channel / 85°C/ 2.6Vdc	2400.991570	16.185		EMI4614
High channel / 25°C/ 3.0Vdc	2480.974794	N/A		EMI4616
High channel / 25°C/ 2.6Vdc	2480.974644	-0.150		EMI4617
High channel / -40°C/ 3.0Vdc	2480.944755	-30.039		EMI4618
High channel / -40°C/ 2.6Vdc	2480.944136	-30.658		EMI4619
High channel / 85°C/ 3.0Vdc	2480.990204	15.410		EMI4620
High channel / 85°C/ 2.6Vdc	2480.990309	15.515		EMI4621

EUT MODIFICATIONS	OPERATOR	TEST DATE	RESULT TAB.
N/A	OAT	18/12/2019	-

●●● End of test report ●●●