


REVISION			
LTR	DESCRIPTION	DATE	INITIAL
AA	ORIGINAL	3-24-04	SWJ

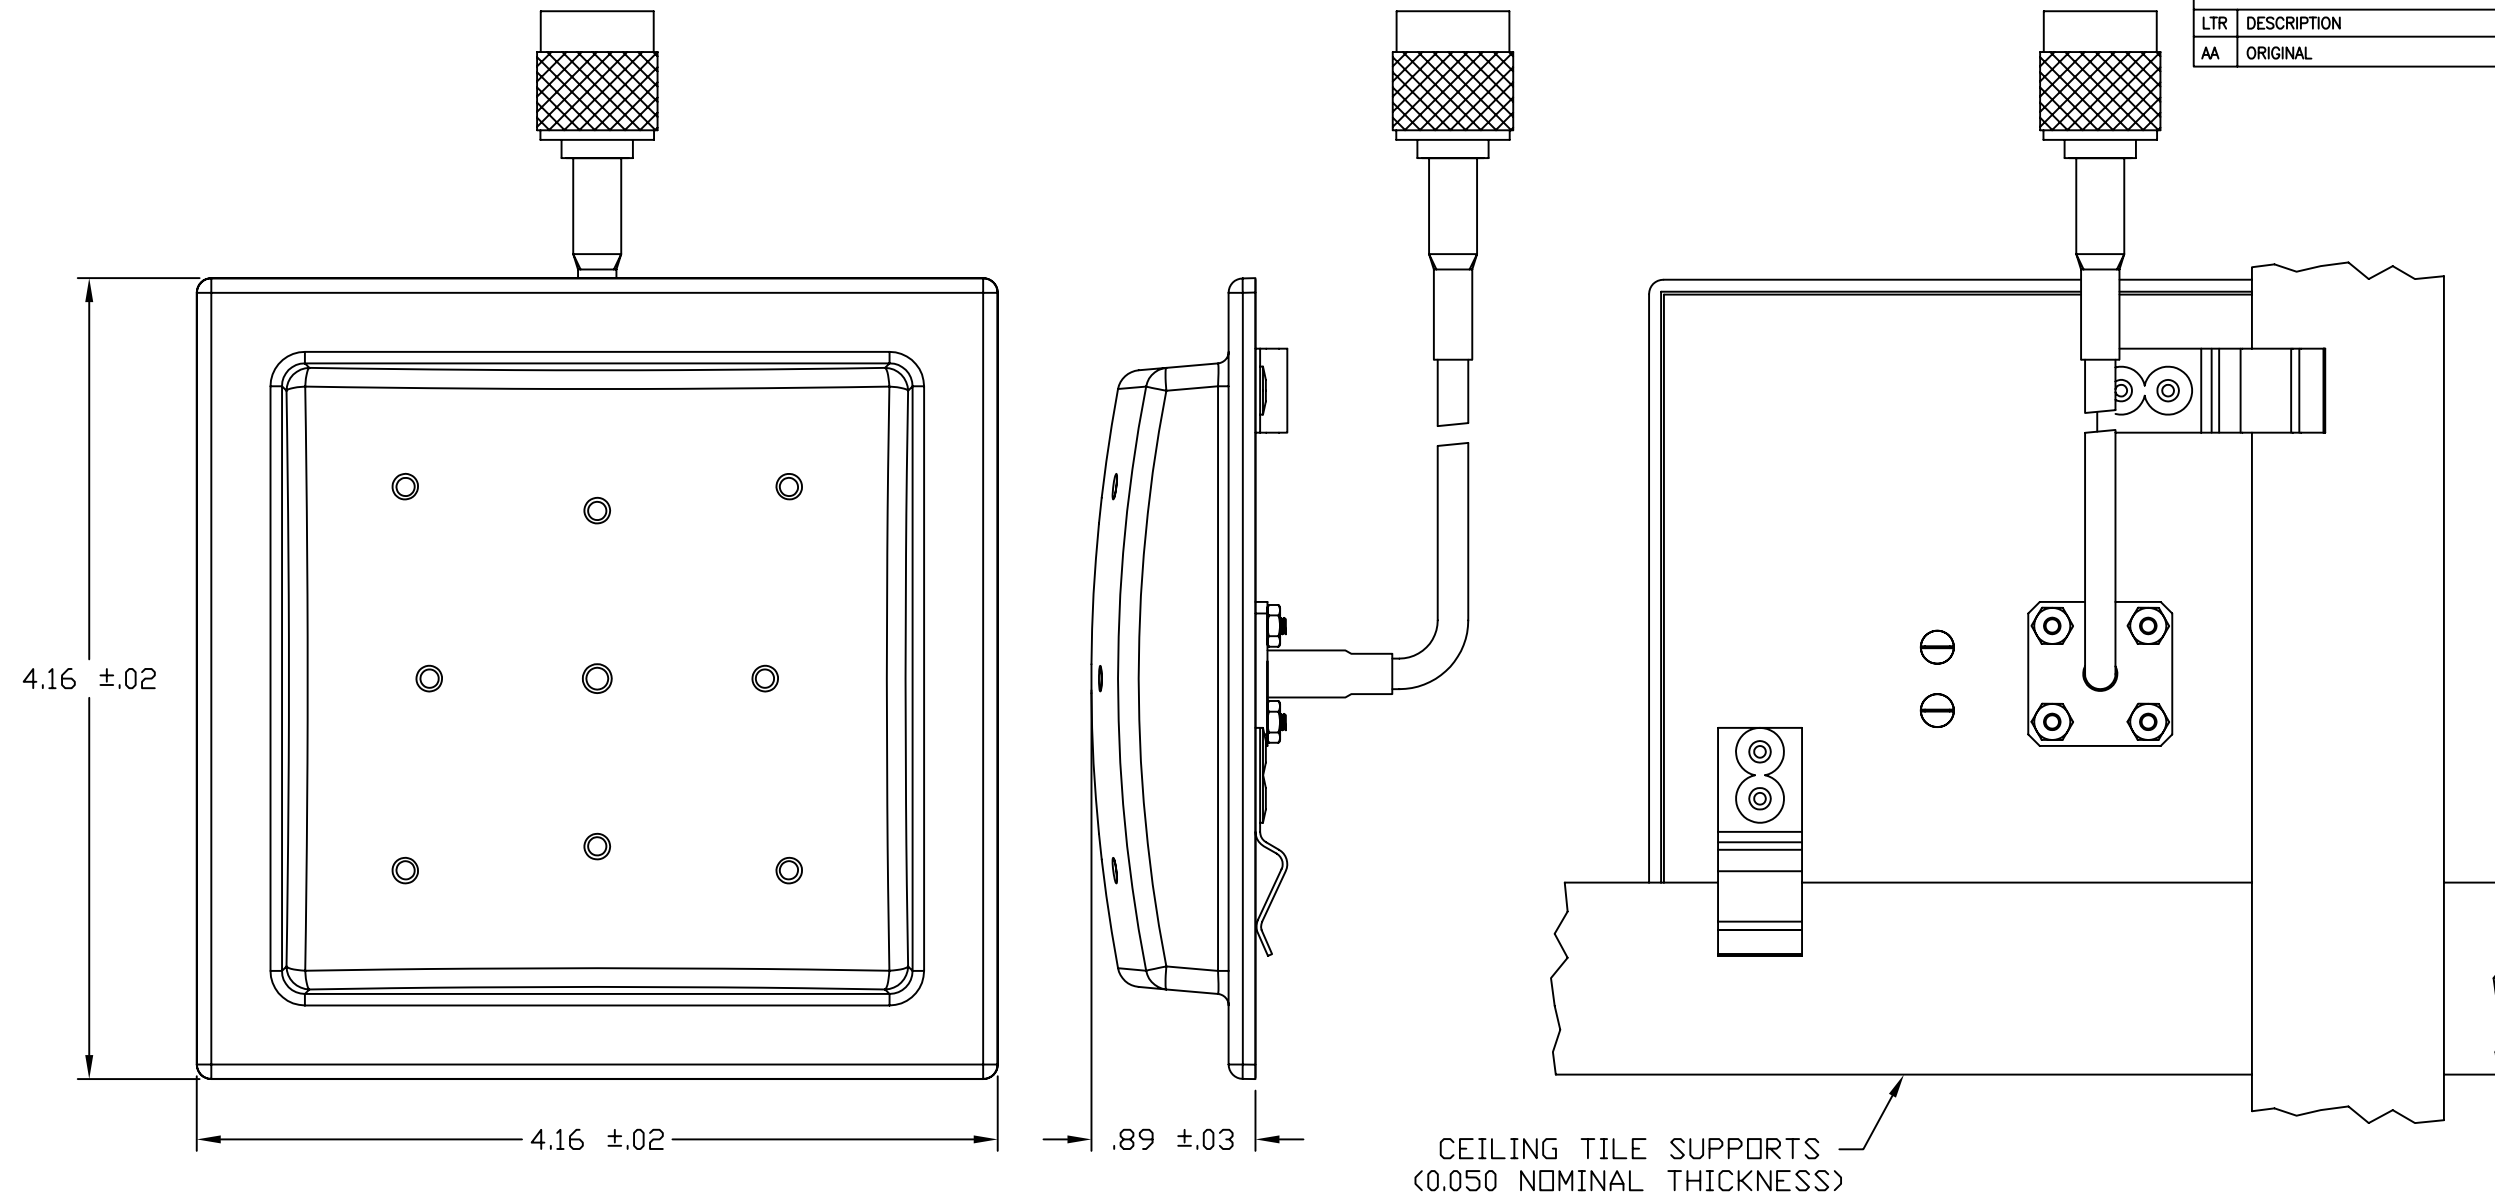

CEILING TILE SUPPORTS
(0.050 NOMINAL THICKNESS)

MOUNTING HARDWARE

QTY	Description	
2	RECESSED TILE ADAPTER CLIP	

PARAMETER	PERFORMANCE
Model Number	SQ2403PN36RTN
Frequency	2400-2500 MHz
Gain (W/12" Cable)	3.5 dBi
Polarization	Vertical Linear
VSWR	1.5:1 Nominal (2.0:1 Max.)
Azimuth Plane Beamwidth	Omnidirectional
Elevation Plane 3 dB Beamwidth	45° (Peak at 53°)
Cable Type	CMP Plenum Rated
Cable Length	36 in.
RF Connector	Rev. TNC
Power	10 Watts
Antenna Weight (excluding cable)	3.2 oz.

MATERIAL:	DRAWN S JOHNSON	DATE 3-24-04	CUSHCRAFT 48 PERIMETER ROAD MANCHESTER NH. 03108
	ENGINEER J MORROW	DATE 3-24-04	
DO NOT SCALE DRAWING	ENGINEERING MGR A ALEVY	DATE 3-24-04	TITLE: SQ2403PN36RTN MOUNTING & OUTLINE
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: ANGLES ±2° FRACTIONS ±1/16" .XX ±0.030" .XXX ±0.015"	FINISH:		DRAWING NO. SQ2403PN36RTNMO
			REV AA
			SCALE 1:1 SIZE B SHEET 1 OF 1

CONFIDENTIAL
© 2004, Cushcraft Corporation. Information contained in this document is of a proprietary and/or legally privileged nature. It may not be reproduced without express written permission of Cushcraft Corporation, Manchester, NH.