


The Component(s), including any plating or coatings, supplied per this drawing must be compliant with EU Directive 2002/95/EC (RoHS Directive).

REVISION			
LTR	DESCRIPTION	DATE	INITIAL
AA	ORIGINAL	4-18-07	SWJ

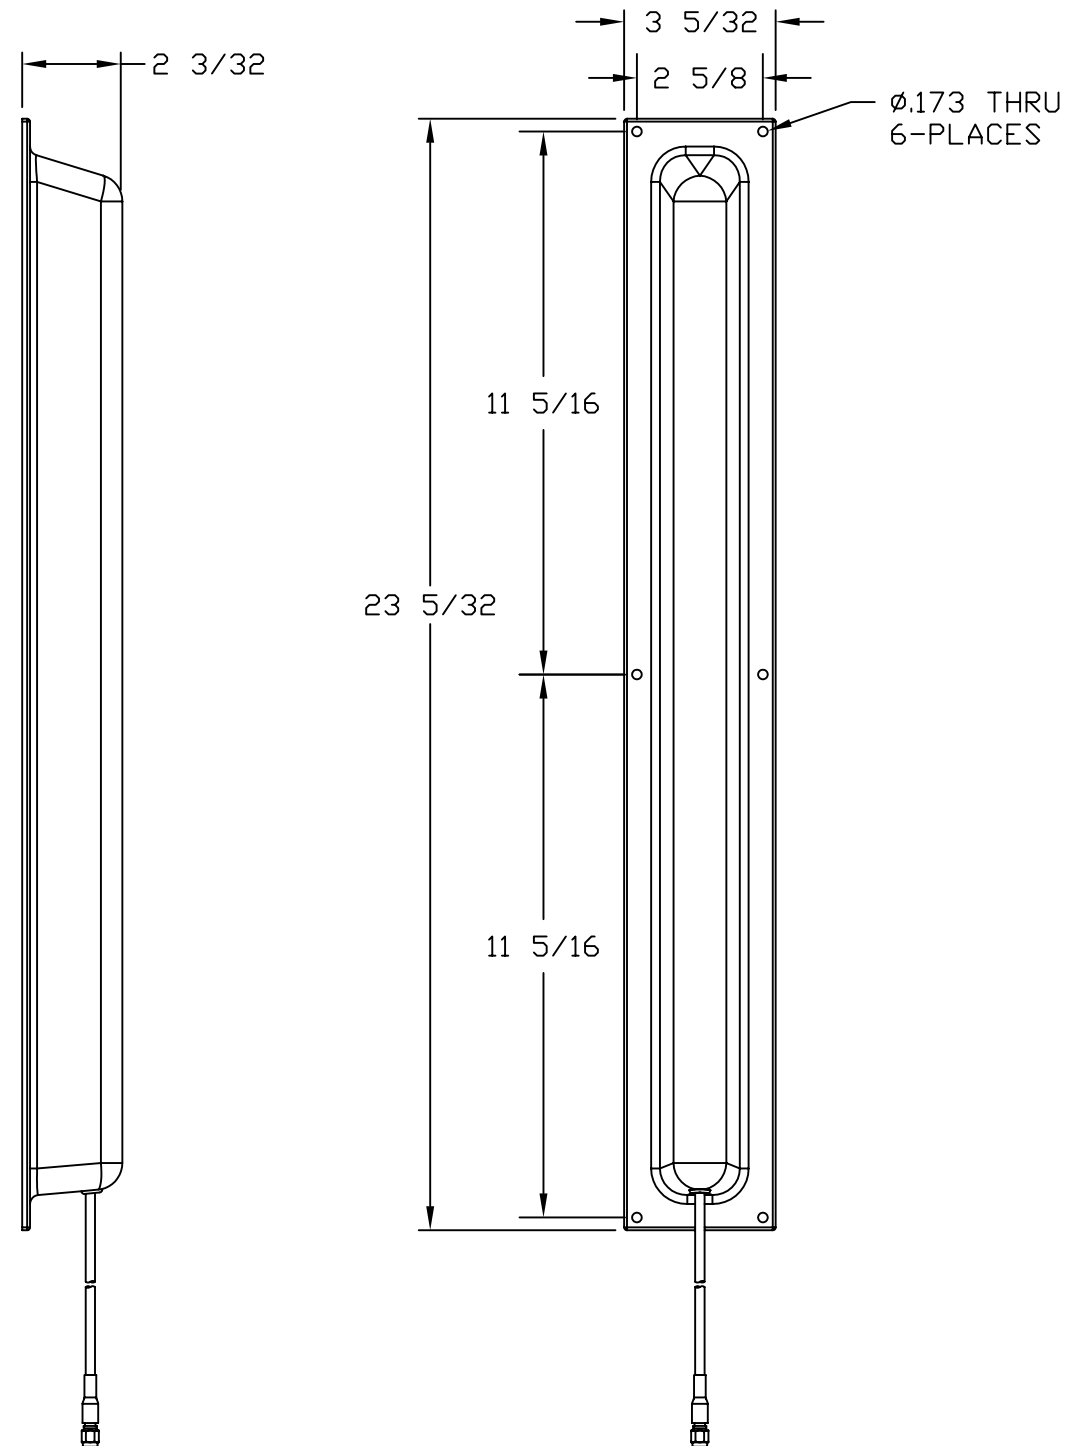

Parameter	Performance
Model Number	SR24120DN36RSM
Nortel Part Number	DR4000087E6
Frequency	2400-2500 MHz
Gain	11 dBi
Polarization	Linear, Vertical
VSWR	1.7:1
Elevation Plane 3 dB Beamwidth	13°
Azimuth Plane 3 dB Beamwidth	120°
Front to Back Ratio	18 dB
Pigtail	36"
RF Connector	Reverse SMA(m)
Power	50 W
Weight	1.5 lb

MATERIAL:	DRAWN S JOHNSON	DATE 4-18-07	<b>CUSHCRAFT</b> 48 PERIMETER ROAD MANCHESTER NH. 03108	
	ENGINEER R LITTLEFIELD	DATE 4-23-07		
DO NOT SCALE DRAWING	ENGINEERING MGR A ALEVY	DATE 4-25-07	TITLE: <b>SR24120DN36RSM          MOUNTING &amp; OUTLINE</b>	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: ANGLES ±0.5° FRACTIONS ±1/64" .XX ±0.010" .XXX ±0.005"	FINISH:		DRAWING NO. SR24120DN36RSMMO	REV AA
	SCALE 1:4	SIZE B	SHEET 1 OF 1	

CONFIDENTIAL  
 © 2001, Cushcraft Corporation. Information contained in this document is of a proprietary and/or legally privileged nature. It may not be reproduced without express written permission of Cushcraft Corporation, Manchester, NH.