

# FCC Radio Test Report

## FCC ID: RWO-344

This report concerns: Original Grant

**Project No.** : 2007C173  
**Equipment** : Wireless Earphones  
**Brand Name** : RAZER  
**Test Model** : 344  
**Series Model** : RC30-344XXXXX-XXXX(X can be 0-9 or A-Z)  
**Applicant** : Razer Inc.  
**Address** : 9 Pasteur, Suite 100, Irvine, CA92618, USA  
**Manufacturer** : Razer (Asia-Pacific) Pte.,Ltd.  
**Address** : 514 Chai Chee Lane, #07-01-06,Singapore 469029  
**Factory** : RAZER TECHNOLOGY AND DEVELOPMENT (SHENZHEN) CO., LTD  
**Address** : East Wing, 3rd Floor, Block 2, Phase 1 of Vision Shenzhen Business Park Keji South Road, Hi-Tech Industrial Park, Shenzhen 518057, China  
**Date of Receipt** : Jul. 17, 2020  
**Date of Test** : Jul. 22, 2020 ~ Aug. 15, 2020  
**Issued Date** : Sep. 02, 2020  
**Report Version** : R00  
**Test Sample** : Sample No.: DG2020072221 for conducted, DG202007244 for radiated  
**Standard(s)** : FCC Part15, Subpart C (15.247)  
ANSI C63.10-2013  
FCC KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.



Prepared by : Welly Zhou



Approved by : Ethan Ma



Certificate #5123.02

Add: No.3, Jinshagang 1st Road, Shixia, Dalang Town,Dongguan, Guangdong, China.

Tel: +86-769-8318-3000

Web: www.newbtl.com

**Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

**BTL** is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

**Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

**Table of Contents****Page**

<b>REPORT ISSUED HISTORY</b>	<b>6</b>
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>7</b>
1.1 TEST FACILITY	8
1.2 MEASUREMENT UNCERTAINTY	8
1.3 TEST ENVIRONMENT CONDITIONS	8
<b>2 . GENERAL INFORMATION</b>	<b>9</b>
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 DESCRIPTION OF TEST MODES	11
2.3 PARAMETERS OF TEST SOFTWARE	12
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
2.5 SUPPORT UNITS	13
<b>3 . AC POWER LINE CONDUCTED EMISSIONS TEST</b>	<b>14</b>
3.1 LIMIT	14
3.2 TEST PROCEDURE	14
3.3 DEVIATION FROM TEST STANDARD	14
3.4 TEST SETUP	15
3.5 EUT OPERATING CONDITIONS	15
3.6 TEST RESULTS	15
<b>4 . RADIATED EMISSION TEST</b>	<b>16</b>
4.1 LIMIT	16
4.2 TEST PROCEDURE	17
4.3 DEVIATION FROM TEST STANDARD	17
4.4 TEST SETUP	18
4.5 EUT OPERATING CONDITIONS	19
4.6 TEST RESULTS - 9 KHZ TO 30 MHZ	19
4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	19
4.8 TEST RESULTS - ABOVE 1000 MHZ	19
<b>5 . NUMBER OF HOPPING FREQUENCY</b>	<b>20</b>
5.1 LIMIT	20
5.2 TEST PROCEDURE	20
5.3 DEVIATION FROM STANDARD	20
5.4 TEST SETUP	20

<b>Table of Contents</b>	<b>Page</b>
5.5 EUT OPERATION CONDITIONS	20
5.6 TEST RESULTS	20
<b>6 . AVERAGE TIME OF OCCUPANCY</b>	<b>21</b>
6.1 LIMIT	21
6.2 TEST PROCEDURE	21
6.3 DEVIATION FROM STANDARD	21
6.4 TEST SETUP	21
6.5 EUT OPERATION CONDITIONS	21
6.6 TEST RESULTS	21
<b>7 . HOPPING CHANNEL SEPARATION MEASUREMENT</b>	<b>22</b>
7.1 LIMIT	22
7.2 TEST PROCEDURE	22
7.3 DEVIATION FROM STANDARD	22
7.4 TEST SETUP	22
7.5 EUT OPERATION CONDITIONS	22
7.6 TEST RESULTS	22
<b>8 . BANDWIDTH TEST</b>	<b>23</b>
8.1 LIMIT	23
8.2 TEST PROCEDURE	23
8.3 DEVIATION FROM STANDARD	23
8.4 TEST SETUP	23
8.5 EUT OPERATION CONDITIONS	23
8.6 TEST RESULTS	23
<b>9 . MAXIMUM OUTPUT POWER</b>	<b>24</b>
9.1 LIMIT	24
9.2 TEST PROCEDURE	24
9.3 DEVIATION FROM STANDARD	24
9.4 TEST SETUP	24
9.5 EUT OPERATION CONDITIONS	24
9.6 TEST RESULTS	24
<b>10 . CONDUCTED SPURIOUS EMISSION</b>	<b>25</b>
10.1 LIMIT	25
10.2 TEST PROCEDURE	25

<b>Table of Contents</b>	<b>Page</b>
<b>10.3 DEVIATION FROM STANDARD</b>	<b>25</b>
<b>10.4 TEST SETUP</b>	<b>25</b>
<b>10.5 EUT OPERATION CONDITIONS</b>	<b>25</b>
<b>10.6 TEST RESULTS</b>	<b>25</b>
<b>11 . MEASUREMENT INSTRUMENTS LIST</b>	<b>26</b>
<b>APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS</b>	<b>28</b>
<b>APPENDIX B - RADIATED EMISSION - 9 KHZ-30 MHZ</b>	<b>31</b>
<b>APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ</b>	<b>36</b>
<b>APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ</b>	<b>39</b>
<b>APPENDIX E - NUMBER OF HOPPING FREQUENCY</b>	<b>64</b>
<b>APPENDIX F - AVERAGE TIME OF OCCUPANCY</b>	<b>66</b>
<b>APPENDIX G - HOPPING CHANNEL SEPARATION MEASUREMENT</b>	<b>71</b>
<b>APPENDIX H - BANDWIDTH</b>	<b>73</b>
<b>APPENDIX I - MAXIMUM OUTPUT POWER</b>	<b>75</b>
<b>APPENDIX J - CONDUCTED SPURIOUS EMISSION</b>	<b>79</b>

**REPORT ISSUED HISTORY**

Report Version	Description	Issued Date
R00	Original Issue.	Sep. 02, 2020

## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart C (15.247)				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emission	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.247 (a)(1)(iii)	Number of Hopping Frequency	APPENDIX E	PASS	-----
15.247 (a)(1)(iii)	Average Time Of Occupancy	APPENDIX F	PASS	-----
15.247(a)(1)	Hopping Channel Separation	APPENDIX G	PASS	-----
15.247(a)(1)	Bandwidth	APPENDIX H	PASS	-----
15.247(a)(1)	Maximum Output Power	APPENDIX I	PASS	-----
15.247(d)	Conducted Spurious Emission	APPENDIX J	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

**Note:**

- (1) "N/A" denotes test is not applicable in this test report
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

### 1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China  
 BTL's Test Firm Registration Number for FCC: 357015  
 BTL's Designation Number for FCC: CN1240

### 1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))  
 The BTL measurement uncertainty as below table:

#### A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150kHz ~ 30MHz	2.60

#### B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9kHz ~ 30MHz	V	3.79
		9kHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	4.88
		30MHz ~ 200MHz	H	4.14
		200MHz ~ 1,000MHz	V	4.62
		200MHz ~ 1,000MHz	H	4.80
		1GHz ~ 6GHz	-	4.58
		6GHz ~ 18GHz	-	5.18
		18GHz ~ 26.5GHz	-	3.62
		26.5GHz ~ 40GHz	-	4.00

#### C. Other Measurement:

Test Item	Uncertainty
Conducted Spurious Emission	2.67 dB
Hopping Channel Separation	53.46 MHz
Output Power	0.95 dB
Number of Hopping Frequency	53.46 MHz
Temperature	0.08 °C
Humidity	1.5%

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	25°C	53%	AC 120V/60Hz	Kwok Guo
Radiated Emissions-9K-30MHz	25°C	60%	DC 5V	Kwok Guo
Radiated Emissions-30 MHz to 1GHz	22°C	54%	DC 5V	Kwok Guo
Radiated Emissions-Above 1000 MHz	22°C	54%	DC 5V	Kwok Guo
Number of Hopping Frequency	25°C	58%	DC 3.8V	Hayden Chen
Average Time Of Occupancy	25°C	58%	DC 3.8V	Hayden Chen
Hopping Channel Separation	25°C	58%	DC 3.8V	Hayden Chen
Bandwidth	25°C	58%	DC 3.8V	Hayden Chen
Maximum Output Power	25°C	58%	DC 3.8V	Laughing Zhang
Conducted Spurious Emission	25°C	58%	DC 3.8V	Hayden Chen



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	Wireless Earphones
Brand Name	RAZER
Test Model	344
Series Model	RC30-344XXXXX-XXXX(X can be 0-9 or A-Z)
Model Difference(s)	The sytem model number is RZ12-0344; RZ12-0344XXXX-XXXX. This system contains Wireless Earphones Model: 344 (contains left and right) and a Charging Case Model: 344C, RC30-344XXXXX-XXXX(X can be 0-9 or A-Z).
Power Source	1# Supplied from charging case. 2# Supplied from battery. Model: 1054PF3A
Power Rating	1# DC 5V 2# DC 3.8V, 43mAh, 0.163Wh
Operation Frequency	2402 MHz ~ 2480 MHz
Modulation Technology	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Bit Rate of Transmitter	1Mbps, 2Mbps, 3Mbps
Max. Peak Output Power	8.17 dBm (0.0066 W) For 1Mbps 10.03 dBm (0.0101 W) For 2Mbps 10.41 dBm (0.0110 W) For 3Mbps
Max. Average Output Power	8.04 dBm (0.0060 W) For 1Mbps 8.17 dBm (0.0066 W) For 2Mbps 8.46 dBm (0.0070 W) For 3Mbps

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

## 2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

## 3. Table for Filed Antenna:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	Amphenol	LT003	LDS	N/A	-3.5	Left
1	Amphenol	LT003	LDS	N/A	-3.5	Right

## 2.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX Mode <b>NOTE (1)</b>
Mode 2	TX Mode Channel 78 _3Mbps

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

<b>AC power line conducted emissions test</b>	
Final Test Mode	Description
Mode 2	TX Mode Channel 78 _3Mbps

<b>Radiated emissions test - Below 1GHz</b>	
Final Test Mode	Description
Mode 2	TX Mode Channel 78 _3Mbps

<b>Radiated emissions test - Above 1GHz</b>	
Final Test Mode	Description
Mode 1	TX Mode <b>NOTE (1)</b>

<b>Conducted test</b>	
Final Test Mode	Description
Mode 1	TX Mode <b>NOTE (1)</b>

Note:


- (1) The measurements are performed at the high, middle, low available channels.
- (2) The measurements for Hopping Channel Separation and Bandwidth were tested during 1Mbps, 2Mbps and 3Mbps, the worst case are 1Mbps and 3Mbps, only worst case was documented except power.
- (3) For radiated emission above 1 GHz test, 1GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (4) For AC power line conducted emissions and radiated emissions below 1 GHz test, the TX Mode Channel 78 \_3Mbps are found to be the worst case and recorded.
- (5) This product has the mode of BT AFH, which was considered during testing, but this mode is not the worst case mode, and this report only shows the worst case mode.
- (6) Both left earphone and right earphone have been tested and right earphone is found to be the worst case and recorded.

### 2.3 PARAMETERS OF TEST SOFTWARE

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

Test Software	AWBTRDLAB(0.9.9.6)		
Frequency (MHz)	2402	2441	2480
1Mbps	0x03	0x03	0x03
2Mbps	0x03	0x03	0x03
3Mbps	0x03	0x03	0x03

## 2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

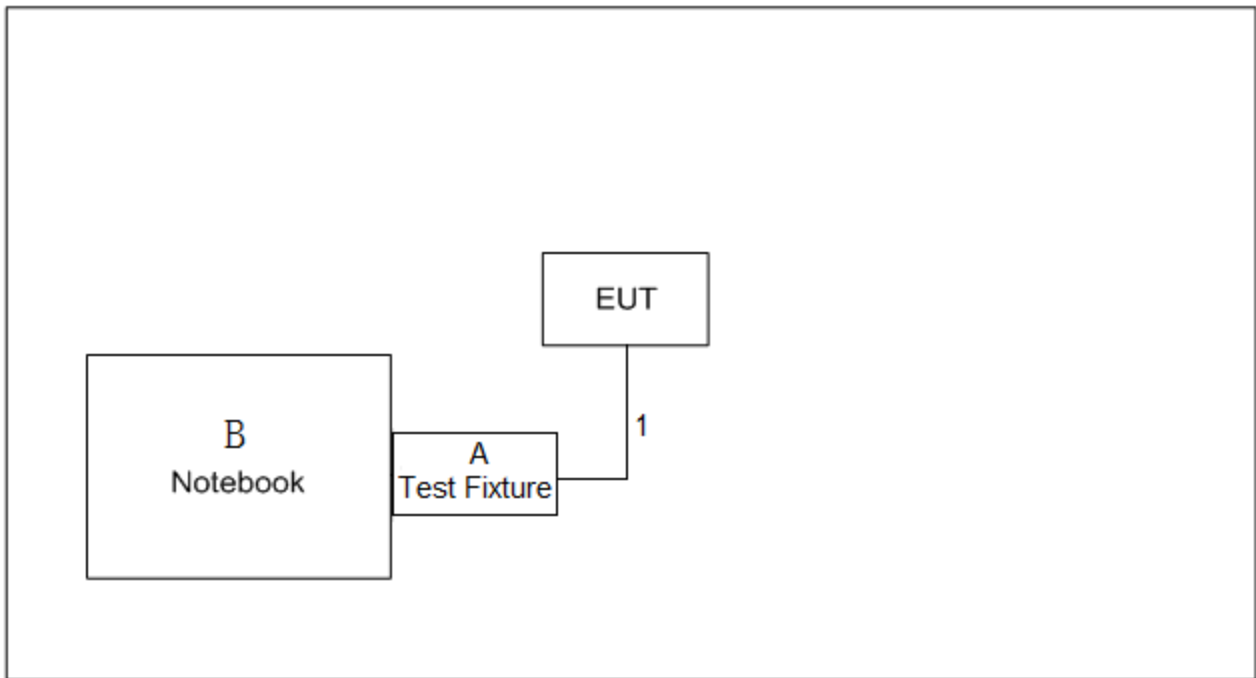

## 2.5 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Test Fixture	N/A	N/A	N/A
B	Notebook	Dell	Inspiron 15-7559	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	Charging Cable	NO	NO	0.2m

### 3. AC POWER LINE CONDUCTED EMISSIONS TEST

#### 3.1 LIMIT

Frequency of Emission (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56*	56 to 46*
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


#### 3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 3.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.4 TEST SETUP

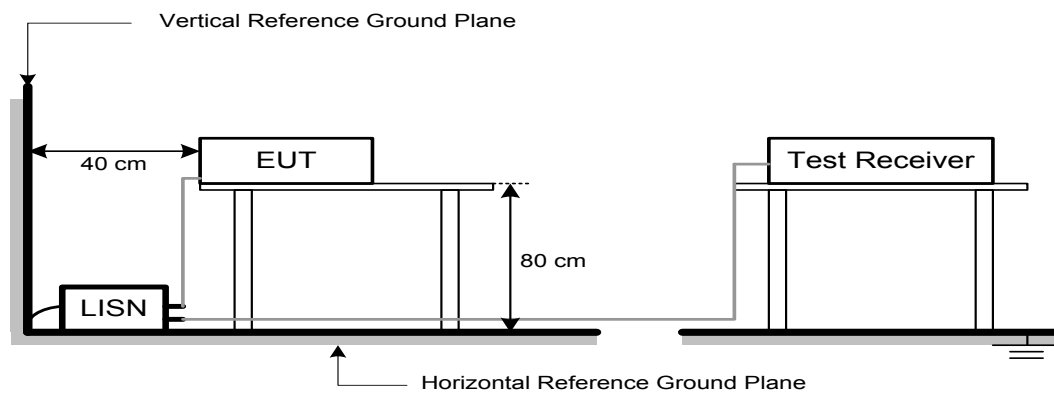

### 3.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical function (as a customer would normally use it), EUT was programmed to be in continuously transmitting data or hopping on mode.

### 3.6 TEST RESULTS

Please refer to the APPENDIX A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of [Note] . If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform in this case, a "\*" marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150 kHz to 30 MHz.

#### 4. RADIATED EMISSION TEST

##### 4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	(dBuV/m at 3 m)	
	Peak	Average
Above 1000	74	54

Note:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	RBW 1 MHz VBW 3 MHz peak detector for Pk value RMS detector for AV value

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector






#### 4.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1 GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.3 DEVIATION FROM TEST STANDARD

No deviation

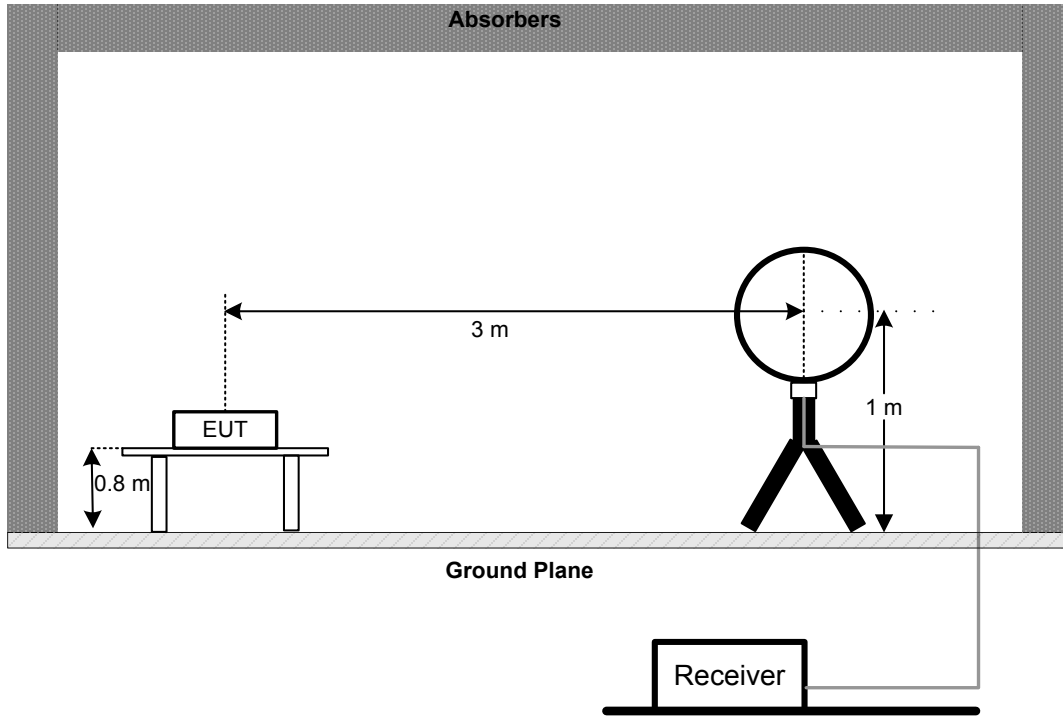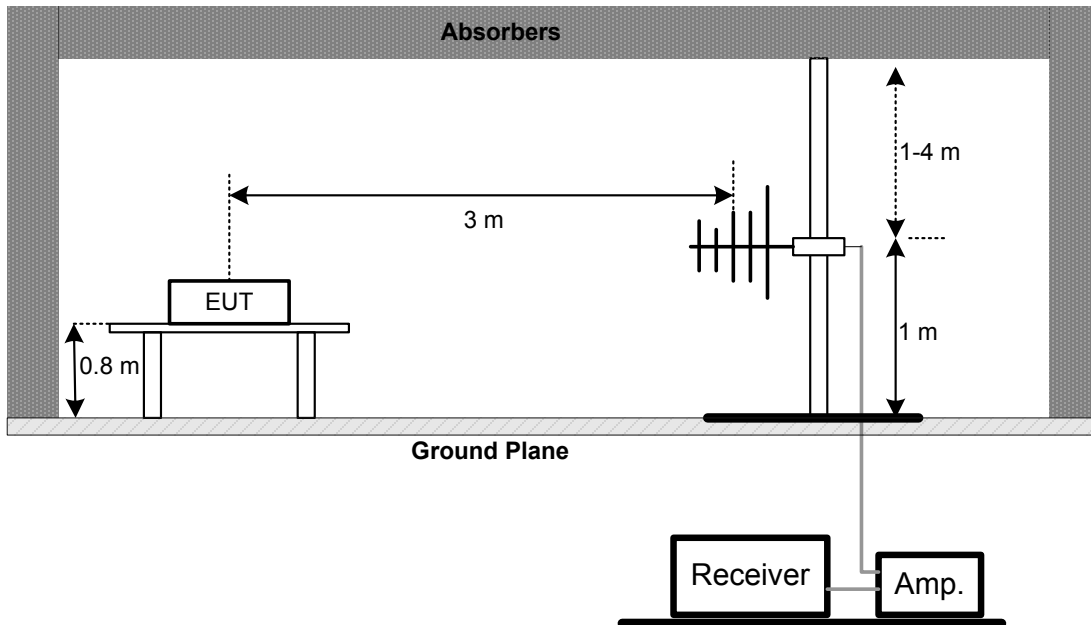**4.4 TEST SETUP****9 kHz-30 MHz****30 MHz to 1 GHz**

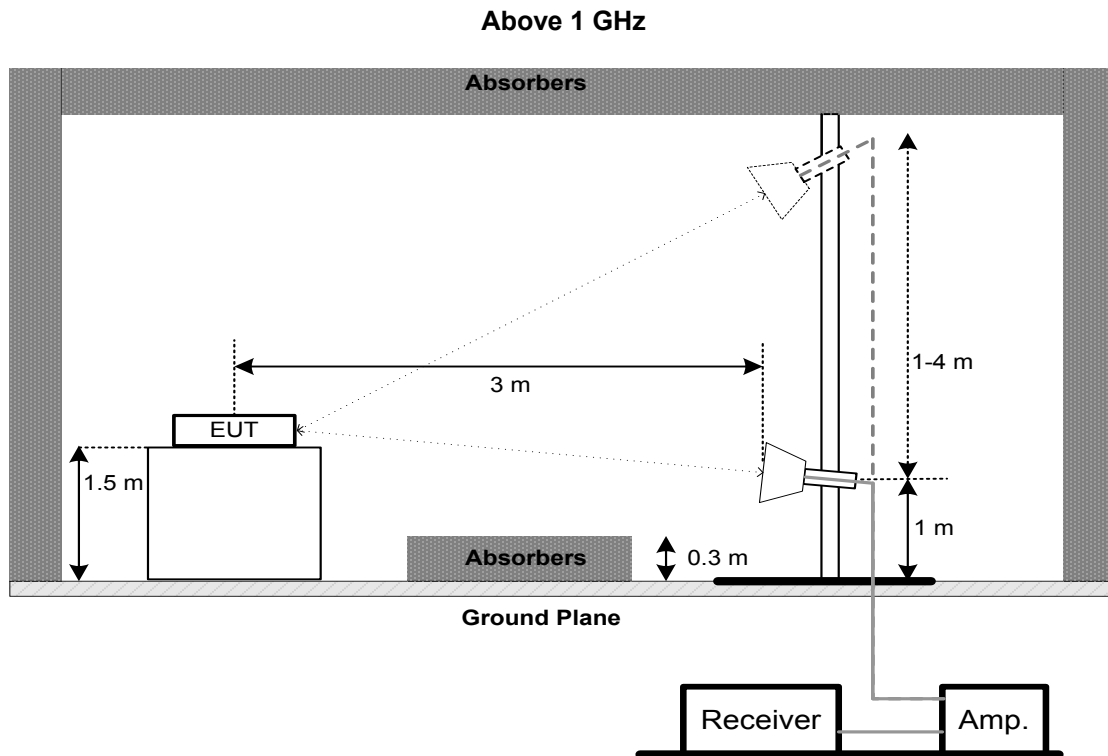

#### 4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

#### 4.6 TEST RESULTS - 9 kHz TO 30 MHz

Please refer to the APPENDIX B

Remark:

- (1) Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

#### 4.7 TEST RESULTS - 30 MHz TO 1000 MHz

Please refer to the APPENDIX C.

#### 4.8 TEST RESULTS - ABOVE 1000 MHz

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.

## 5. NUMBER OF HOPPING FREQUENCY

### 5.1 LIMIT

FCC Part15, Subpart C (15.247)	
Section	Test Item
15.247(a)(1)(iii)	Number of Hopping Frequency

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RBW	100 kHz
VBW	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 5.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW=100 kHz, VBW=100 kHz, Sweep time = Auto.

### 5.3 DEVIATION FROM STANDARD

No deviation.

### 5.4 TEST SETUP



### 5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

### 5.6 TEST RESULTS

Please refer to the APPENDIX E

## 6. AVERAGE TIME OF OCCUPANCY

### 6.1 LIMIT

FCC Part15, Subpart C (15.247)		
Section	Test Item	Limit
15.247(a)(1)(iii)	Average Time of Occupancy	0.4sec

### 6.2 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyzer
- b. Set RBW of spectrum analyzer to 1 MHz and VBW to 1 MHz
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses
- d. Sweep Time is more than once pulse time
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span
- f. Measure the maximum time duration of one single pulse
- g. Set the EUT for DH1, DH3 and DH5 packet transmitting
- h. Measure the maximum time duration of one single pulse
  - i. DH1 Packet permit maximum  $1600 / 79 / 2 = 10.12$  hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $10.12 \times 31.6 = 320$  within 31.6 seconds
  - j. DH3 Packet permit maximum  $1600 / 79 / 4 = 5.06$  hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $5.06 \times 31.6 = 160$  within 31.6 seconds
  - k. DH5 Packet permit maximum  $1600 / 79 / 6 = 3.37$  hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $3.37 \times 31.6 = 106.6$  within 31.6 seconds

### 6.3 DEVIATION FROM STANDARD

No deviation.

### 6.4 TEST SETUP



### 6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

### 6.6 TEST RESULTS

Please refer to the APPENDIX F

## 7. HOPPING CHANNEL SEPARATION MEASUREMENT

### 7.1 LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	30 kHz
VBW	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


### 7.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Span = wide enough to capture the peaks of two adjacent channels  
 Resolution (or IF) Bandwidth (RBW)  $\geq$  1% of the span  
 Video (or Average) Bandwidth (VBW)  $\geq$  RBW  
 Sweep = Auto  
 Detector function = Peak  
 Trace = Max Hold

### 7.3 DEVIATION FROM STANDARD

No deviation.

### 7.4 TEST SETUP

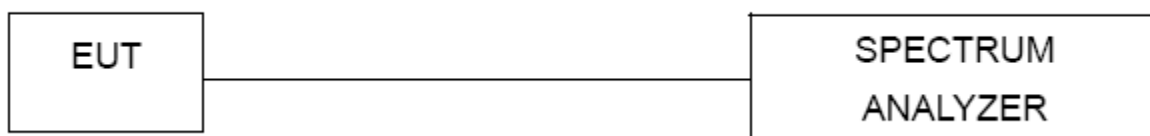

### 7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

### 7.6 TEST RESULTS

Please refer to the APPENDIX G

## 8. BANDWIDTH TEST

### 8.1 LIMIT

FCC Part15, Subpart C (15.247)	
Section	Test Item
15.247(a)(1)	Bandwidth

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth
RBW	30 kHz
VBW	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


### 8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW= 30 kHz, VBW=100 kHz, Sweep Time = Auto.

### 8.3 DEVIATION FROM STANDARD

No deviation.

### 8.4 TEST SETUP

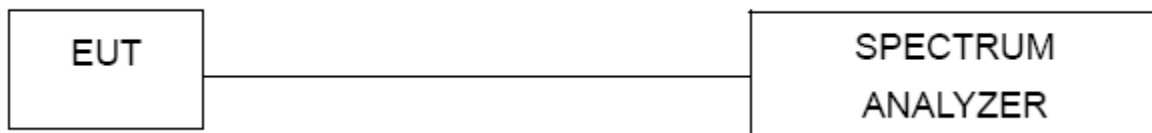

### 8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

### 8.6 TEST RESULTS

Please refer to the APPENDIX H

## 9. MAXIMUM OUTPUT POWER

### 9.1 LIMIT

FCC Part15 , Subpart C (15.247)		
Section	Test Item	Limit
15.247(a)(1)	Maximum Output Power	0.125 Watt or 21 dBm

Note: Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### 9.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 1 MHz/3 MHz, VBW= 1 MHz/3 MHz, Sweep time = Auto.

### 9.3 DEVIATION FROM STANDARD

No deviation.

### 9.4 TEST SETUP



### 9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

### 9.6 TEST RESULTS

Please refer to the APPENDIX I



## 10. CONDUCTED SPURIOUS EMISSION

### 10.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.


### 10.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 100 kHz, VBW=100 kHz, Sweep time = Auto.

### 10.3 DEVIATION FROM STANDARD

No deviation.

### 10.4 TEST SETUP

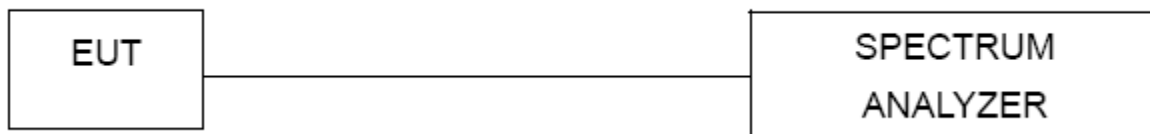

### 10.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

### 10.6 TEST RESULTS

Please refer to the APPENDIX J

**11. MEASUREMENT INSTRUMENTS LIST**

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100382	Feb. 28, 2021
2	LISN	EMCO	3816/2	52765	Mar. 01, 2021
3	TWO-LINE V-NETWORK	R&S	ENV216	101447	Feb. 28, 2021
4	50Ω Terminator	SHX	TF5-3	15041305	Mar. 01, 2021
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	Cable	N/A	RG223	12m	Mar. 10, 2021
7	Shielded Room	ETS-LINDGREN	8.5*4.5*3m	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	EM	EM-6876-1	230	Apr. 16, 2021
2	Cable	N/A	RG 213/U	N/A	May 29, 2021
3	EMI Test Receiver	R&S	ESCI	100895	Feb. 28, 2021
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
5	966 Chambe Room	RM	9*6*6	N/A	Jul. 25, 2021

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarzbeck	VULB9160	9160-3232	Mar. 09, 2021
2*	Amplifier	HP	8447D	2944A09673	Aug. 11, 2021
3	Receiver	Agilent	N9038A	MY52130039	Jul. 25, 2021
4	Cable	emci	LMR-400(30MHz-1 GHz)(8m+5m)	N/A	May 22, 2021
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	966 Chambe Room	RM	9*6*6	N/A	Jul. 25, 2021

Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Guide Antenna	ETS	3115	75789	May 12, 2021
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Jul. 07, 2021
3	Amplifier	Agilent	8449B	3008A02333	Mar. 01, 2021
4	Microwave Preampifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 07, 2021
5	Receiver	Agilent	N9038A	MY52130039	Jul. 25, 2021
6	Controller	CT	SC100	N/A	N/A
7	Controller	MF	MF-7802	MF780208416	N/A
8	Cable	N/A	EMC104-SM-SM-6 000	N/A	May 09, 2021
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	HighPass Filter	Wairwright Instruments Gmbh	WHK3.1/18G-10SS	24	Feb. 28, 2021
11	966 Chambe Room	RM	9*6*6	N/A	Jul. 25, 2021

**Number of Hopping Frequency &  
Average Time of Occupancy &  
Hopping Channel Separation Measurement &  
Bandwidth &  
Maximum Output Power &  
Conducted Spurious Emission**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Jul. 25, 2021
2	DC Block	Mini	N/A	N/A	N/A
3	RF Cable	Tongkaichuan	N/A	N/A	N/A

Remark "N/A" denotes no model name, serial no. or calibration specified.


"\*" calibration period of equipment list is three year.

Except \* item, all calibration period of equipment list is one year.

## **APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS**

Test Mode: TX Mode Channel 78\_3Mbps

Line

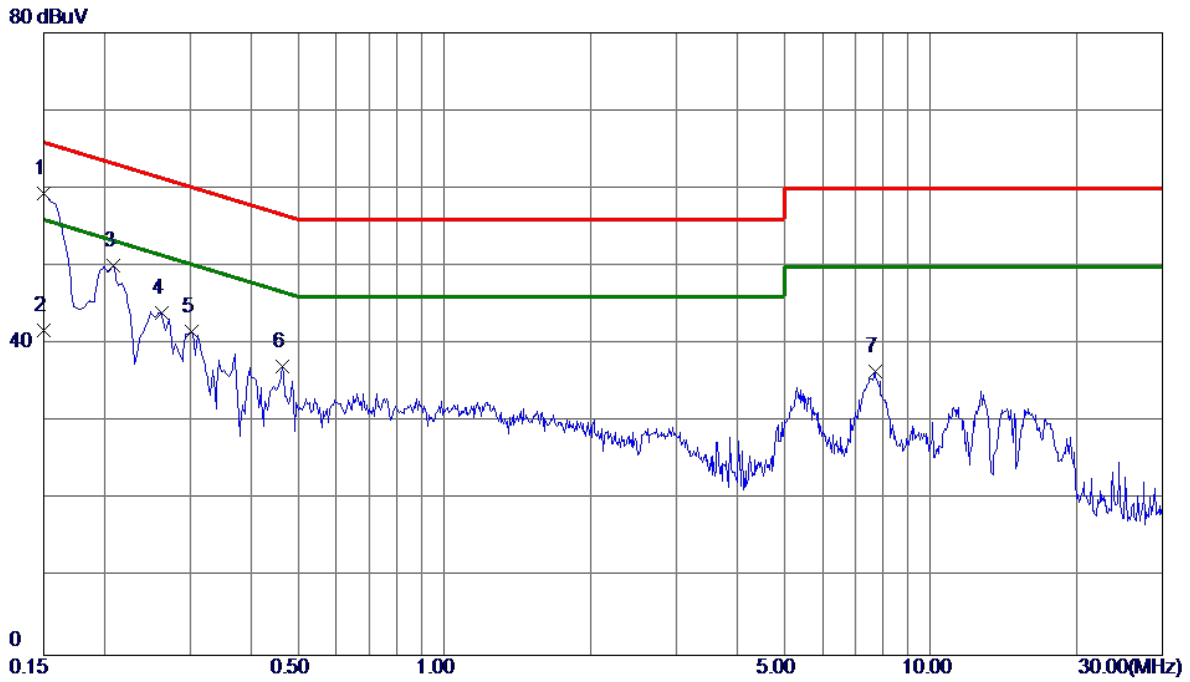


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1 *	0.1500	49.76	9.67	59.43	66.00	-6.57	Peak	
2	0.1500	32.10	9.67	41.77	56.00	-14.23	AVG	
3	0.2085	40.23	9.90	50.13	63.26	-13.13	Peak	
4	0.2625	34.07	9.88	43.95	61.35	-17.40	Peak	
5	0.3030	31.64	9.89	41.53	60.16	-18.63	Peak	
6	0.4650	27.17	9.94	37.11	56.60	-19.49	Peak	
7	7.6785	25.96	10.53	36.49	60.00	-23.51	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX Mode Channel 78\_3Mbps

### Neutral

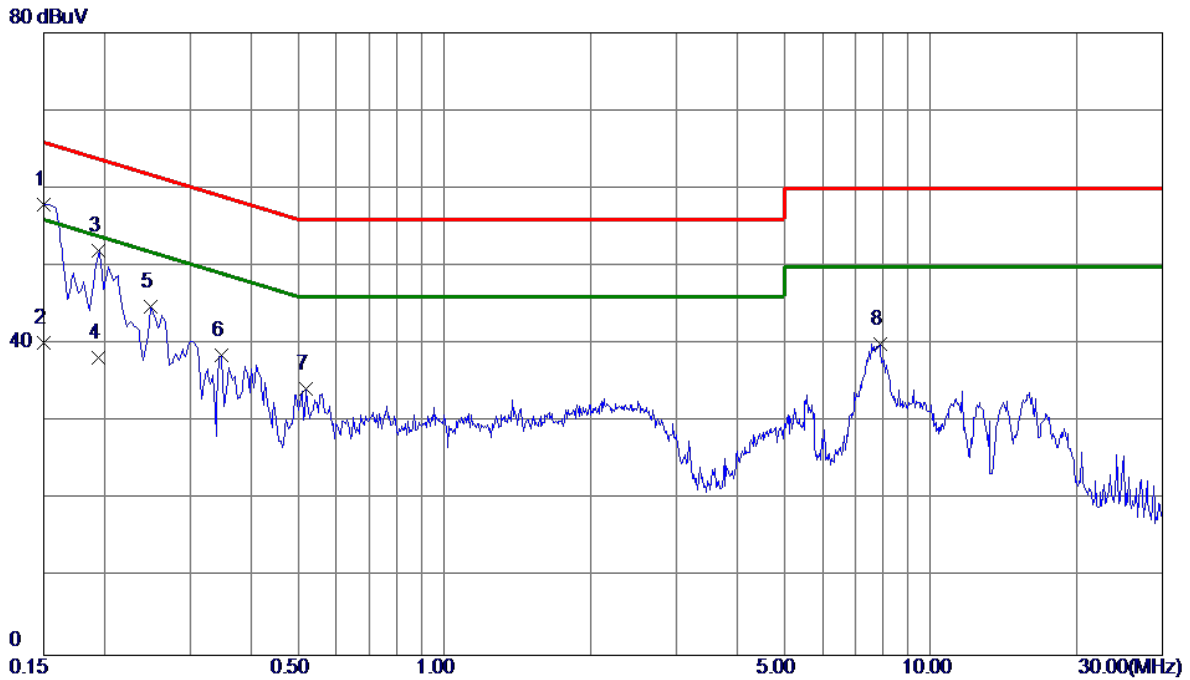

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1 *	0.1500	48.25	9.74	57.99	66.00	-8.01	Peak	
2	0.1500	30.40	9.74	40.14	56.00	-15.86	AVG	
3	0.1949	42.02	9.99	52.01	63.83	-11.82	Peak	
4	0.1949	28.30	9.99	38.29	53.83	-15.54	AVG	
5	0.2490	34.87	9.98	44.85	61.79	-16.94	Peak	
6	0.3480	28.47	10.05	38.52	59.01	-20.49	Peak	
7	0.5190	24.11	10.15	34.26	56.00	-21.74	Peak	
8	7.8720	29.14	10.90	40.04	60.00	-19.96	Peak	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## **APPENDIX B - RADIATED EMISSION - 9 KHZ-30 MHZ**

Test Mode: TX Mode Channel 78\_3Mbps

Ant 0°

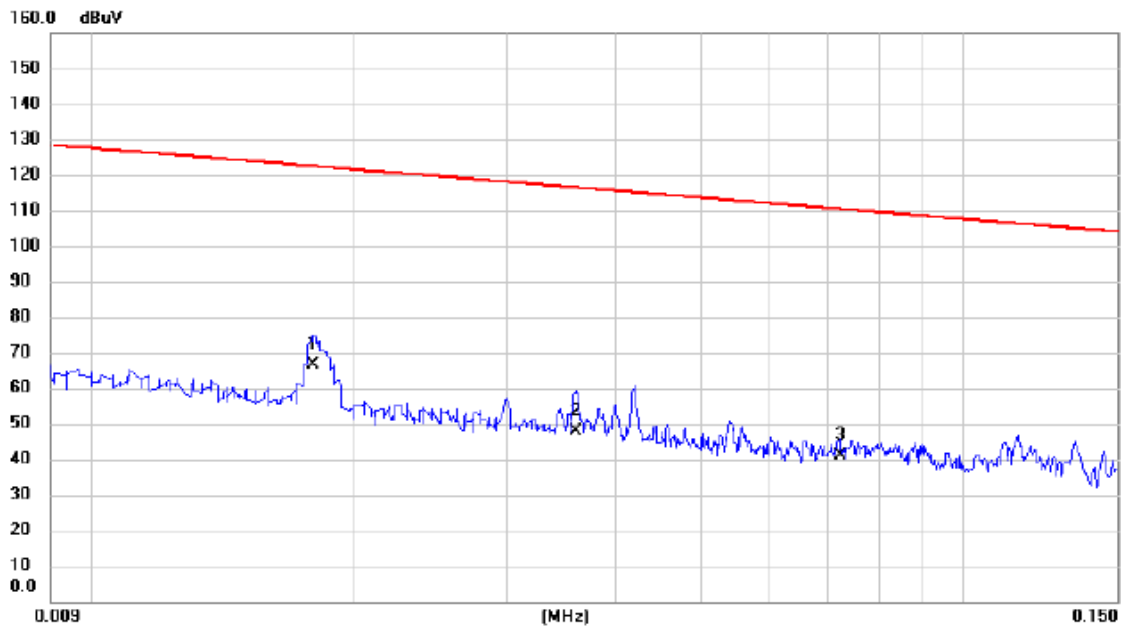

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.0180	52.79	13.84	66.63	122.50	-55.87	AVG	
2		0.0360	35.11	12.79	47.90	116.48	-68.58	AVG	
3		0.0723	28.56	12.55	41.11	110.42	-69.31	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode: TX Mode Channel 78 \_3Mbps

Ant 0°

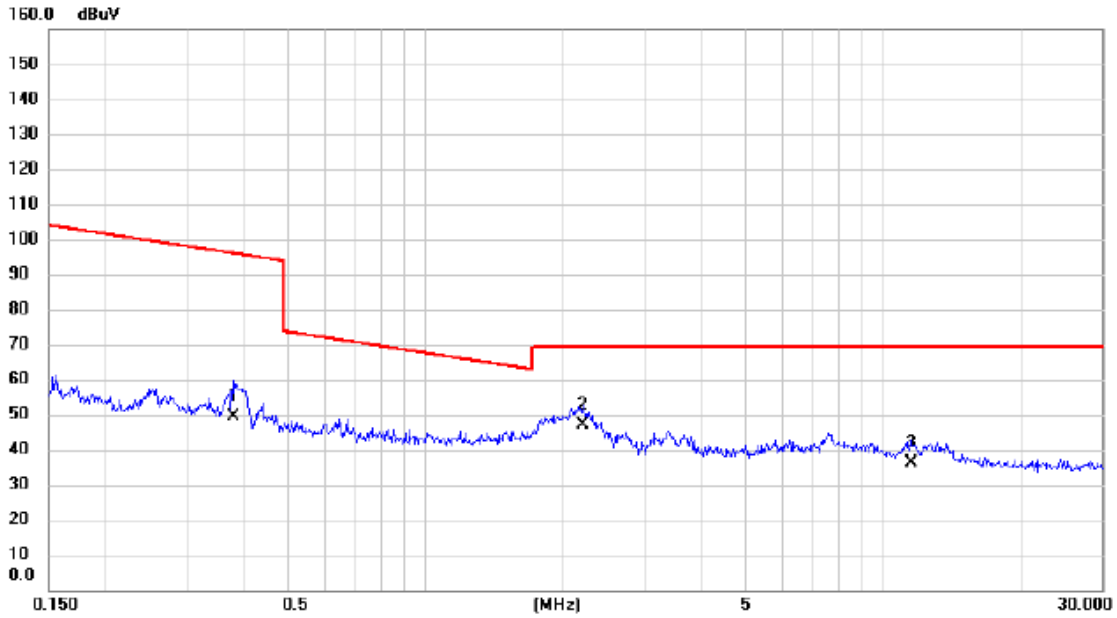

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.3811	37.15	12.31	49.46	95.98	-46.52	AVG	
2	*	2.2015	35.99	11.20	47.19	69.54	-22.35	QP	
3		11.4983	24.75	11.52	36.27	69.54	-33.27	QP	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX Mode Channel 78 \_3Mbps

Ant 90°

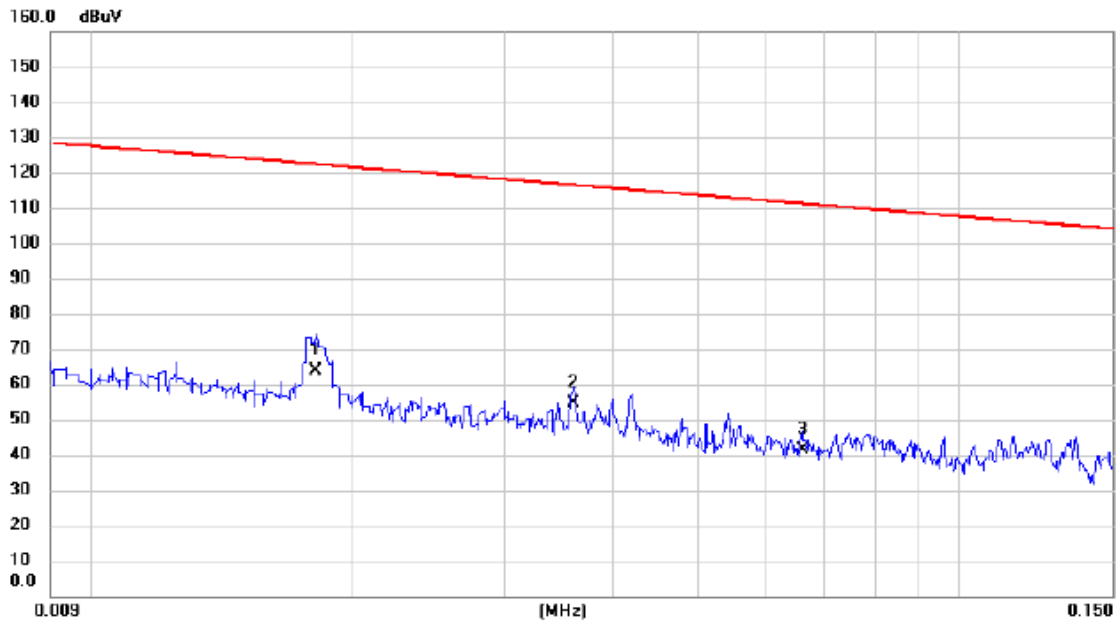


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.0182	50.19	13.78	63.97	122.40	-58.43	AVG	
2		0.0360	41.67	12.79	54.46	116.48	-62.02	AVG	
3		0.0660	29.02	12.52	41.54	111.21	-69.67	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX Mode Channel 78 \_3Mbps

Ant 90°

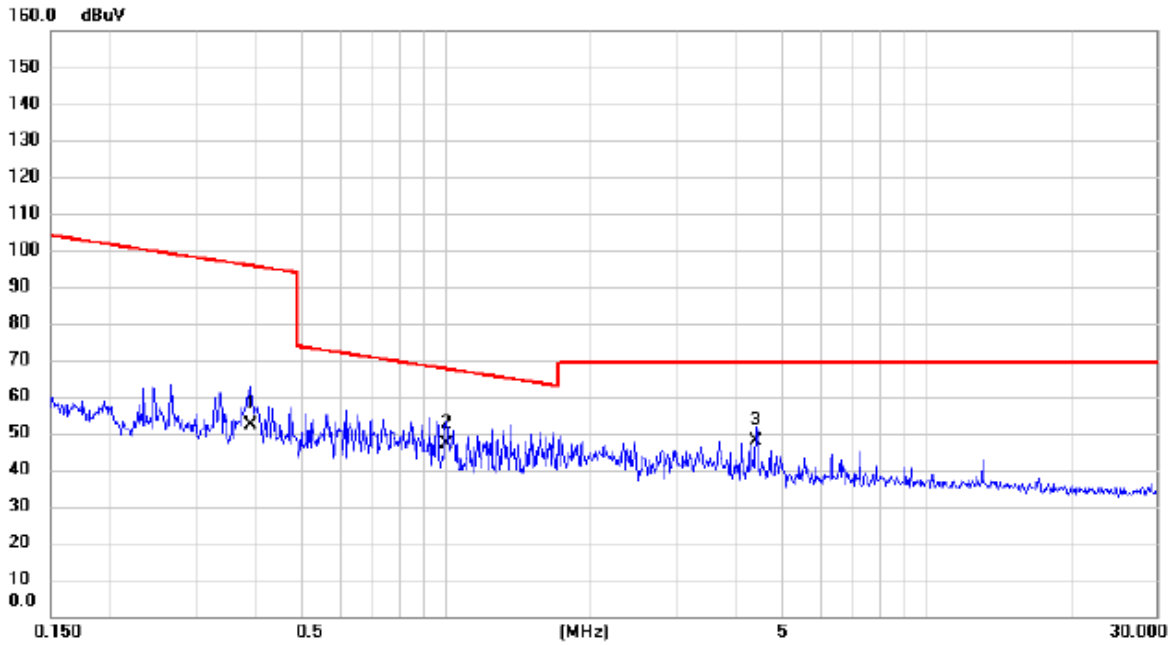

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.3912	39.98	12.29	52.27	95.76	-43.49	AVG	
2	*	0.9996	35.16	11.80	46.96	67.61	-20.65	QP	
3		4.4070	36.77	11.01	47.78	69.54	-21.76	QP	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## **APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ**

Test Mode: TX Mode Channel 78\_3Mbps

**Vertical**

80 dBuV/m

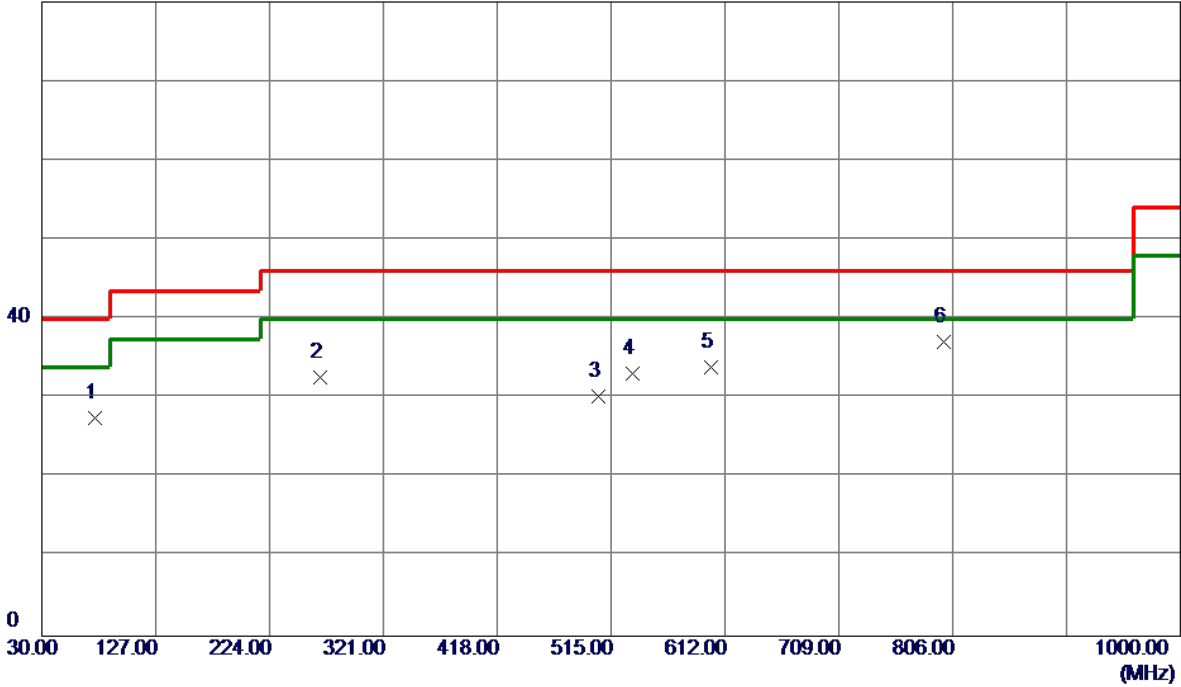

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	75.5899	44.50	-16.95	27.55	40.00	-12.45	Peak	
2	266.6800	45.17	-12.50	32.67	46.00	-13.33	Peak	
3	504.3300	37.45	-7.22	30.23	46.00	-15.77	Peak	
4	533.4300	40.02	-6.96	33.06	46.00	-12.94	Peak	
5	600.3600	39.29	-5.34	33.95	46.00	-12.05	Peak	
6 *	798.2400	39.65	-2.55	37.10	46.00	-8.90	Peak	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX Mode Channel 78\_3Mbps

### Horizontal

80 dBuV/m

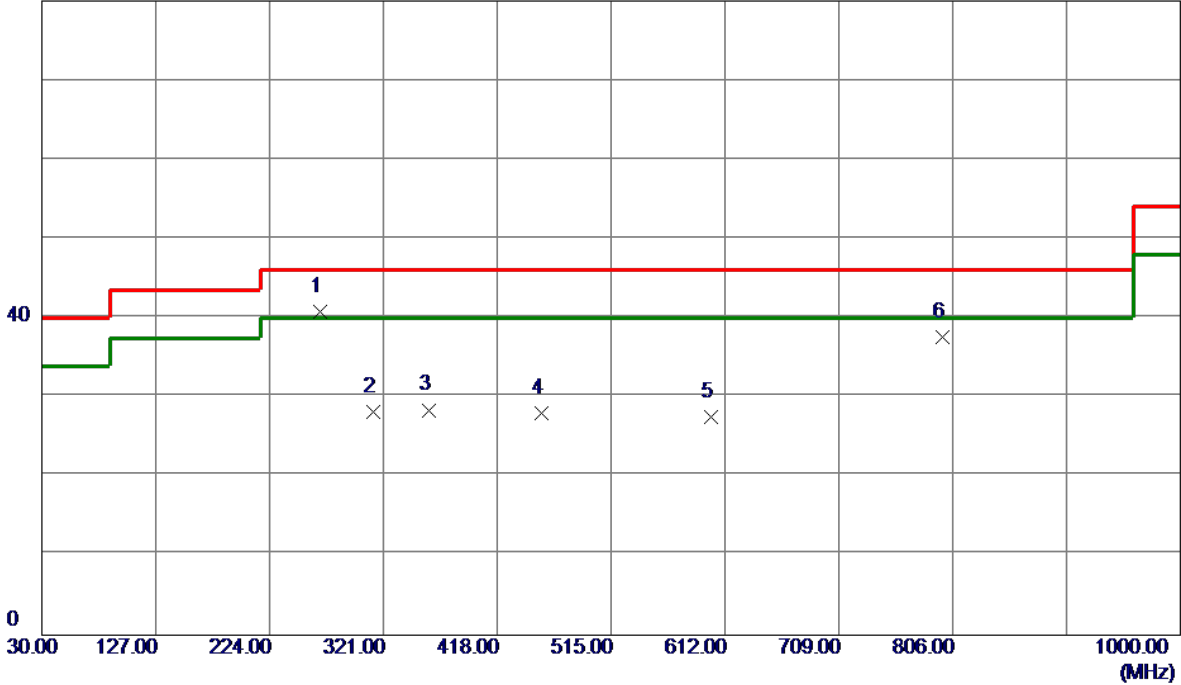

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	266.6800	53.26	-12.50	40.76	46.00	-5.24	Peak	
2	312.2700	39.02	-10.80	28.22	46.00	-17.78	Peak	
3	359.8000	38.37	-9.97	28.40	46.00	-17.60	Peak	
4	455.8300	35.59	-7.59	28.00	46.00	-18.00	Peak	
5	600.3600	32.81	-5.34	27.47	46.00	-18.53	Peak	
6	797.2700	40.22	-2.57	37.65	46.00	-8.35	Peak	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## **APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ**

Test Mode: TX 2402 MHz \_CH00\_1Mbps

**Vertical**

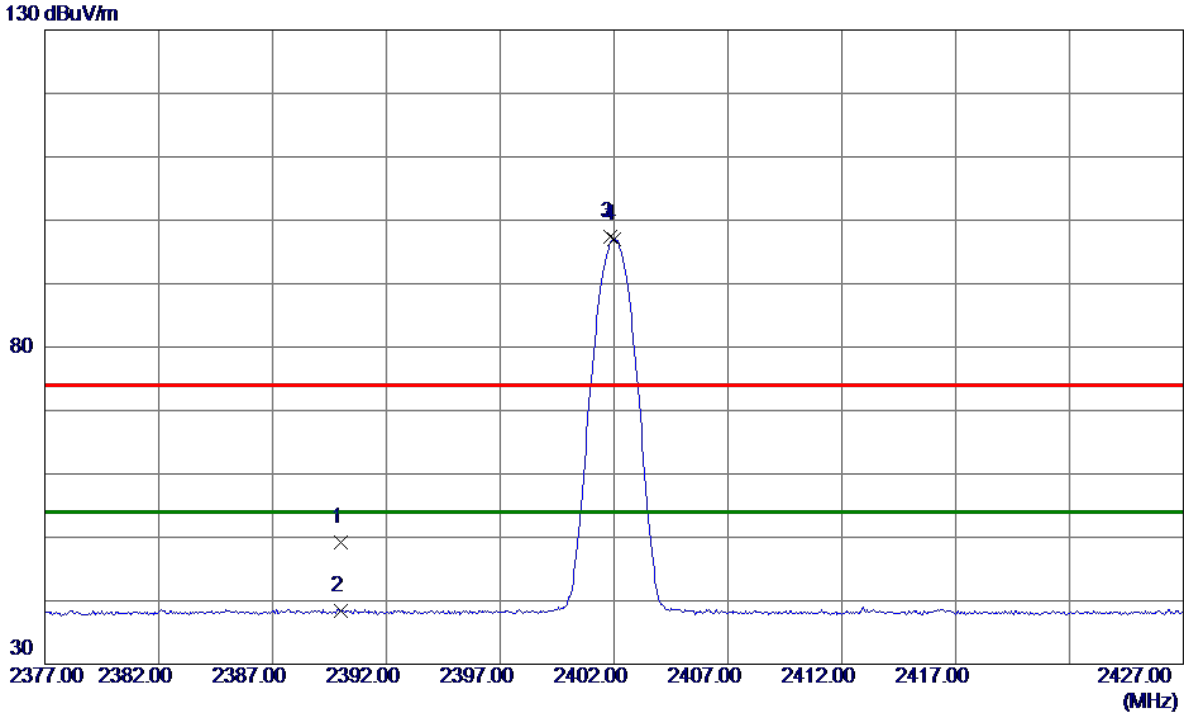

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	40.90	8.29	49.19	74.00	-24.81	Peak	
2	2390.0000	30.17	8.29	38.46	54.00	-15.54	AVG	
3	2401.8500	89.04	8.30	97.34	74.00	23.34	Peak	No Limit
4 *	2402.0000	88.67	8.30	96.97	54.00	42.97	AVG	No Limit

**REMARKS:**


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode: TX 2402 MHz \_CH00\_1Mbps

**Vertical**

80 dBuV/m

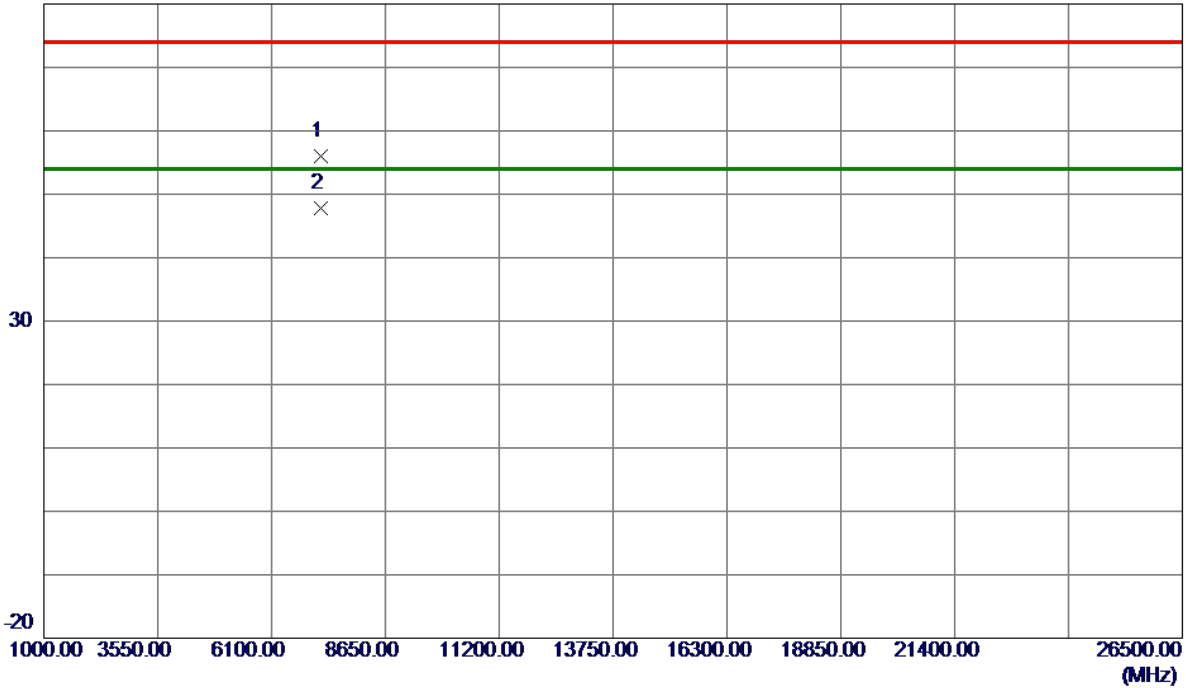


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7205.4500	45.11	10.95	56.06	74.00	-17.94	Peak	
2 *	7206.1050	36.91	10.95	47.86	54.00	-6.14	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2402 MHz \_CH00\_1Mbps

### Horizontal

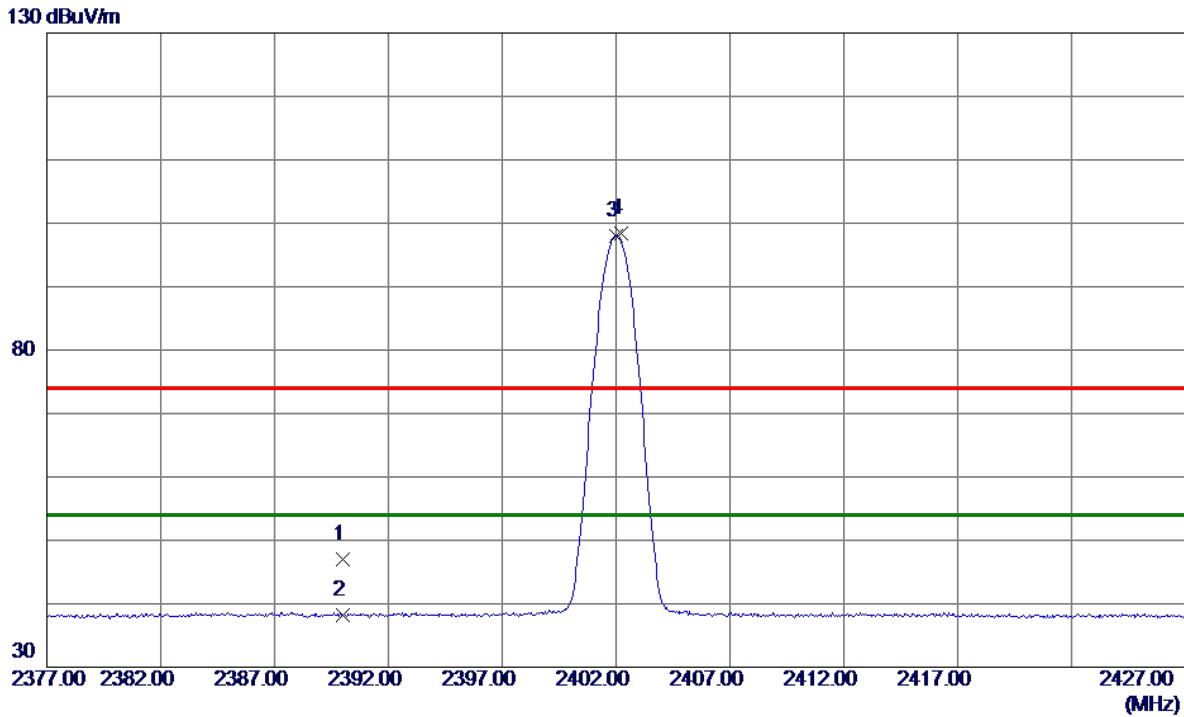

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	38.64	8.29	46.93	74.00	-27.07	Peak	
2	2390.0000	29.98	8.29	38.27	54.00	-15.73	AVG	
3 *	2402.0000	89.75	8.30	98.05	54.00	44.05	AVG	No Limit
4	2402.2000	90.17	8.30	98.47	74.00	24.47	Peak	No Limit


**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2402 MHz \_CH00\_1Mbps

### Horizontal

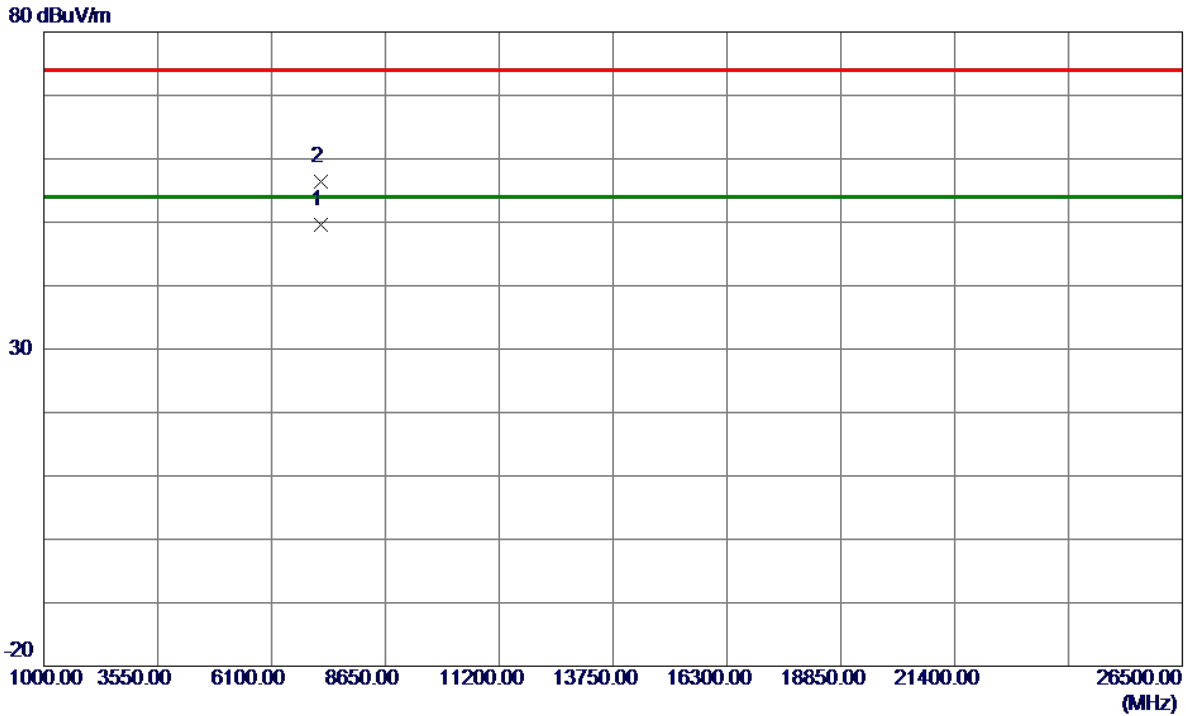


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7205.9850	38.68	10.95	49.63	54.00	-4.37	AVG	
2	7206.4750	45.38	10.95	56.33	74.00	-17.67	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2441 MHz \_CH39\_1Mbps

**Vertical**

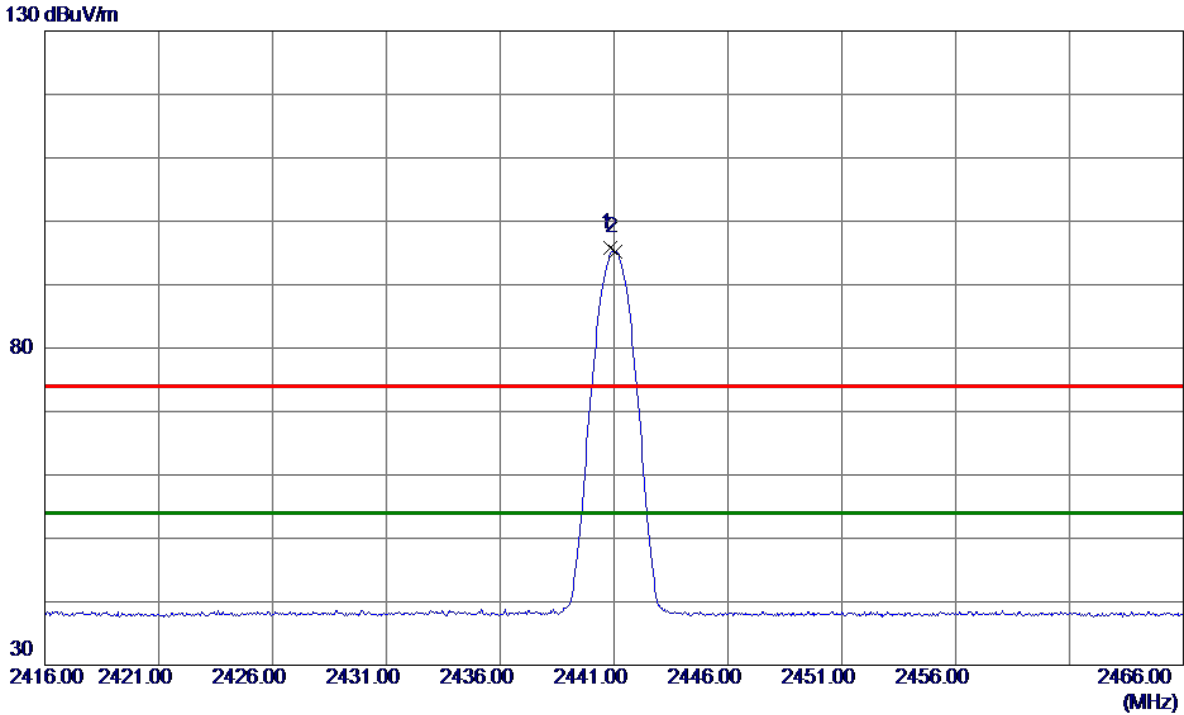

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2440.8500	87.38	8.34	95.72	74.00	21.72	Peak	No Limit
2 *	2441.0500	86.93	8.34	95.27	54.00	41.27	AVG	No Limit


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2441 MHz \_CH39\_1Mbps

**Vertical**

80 dBuV/m

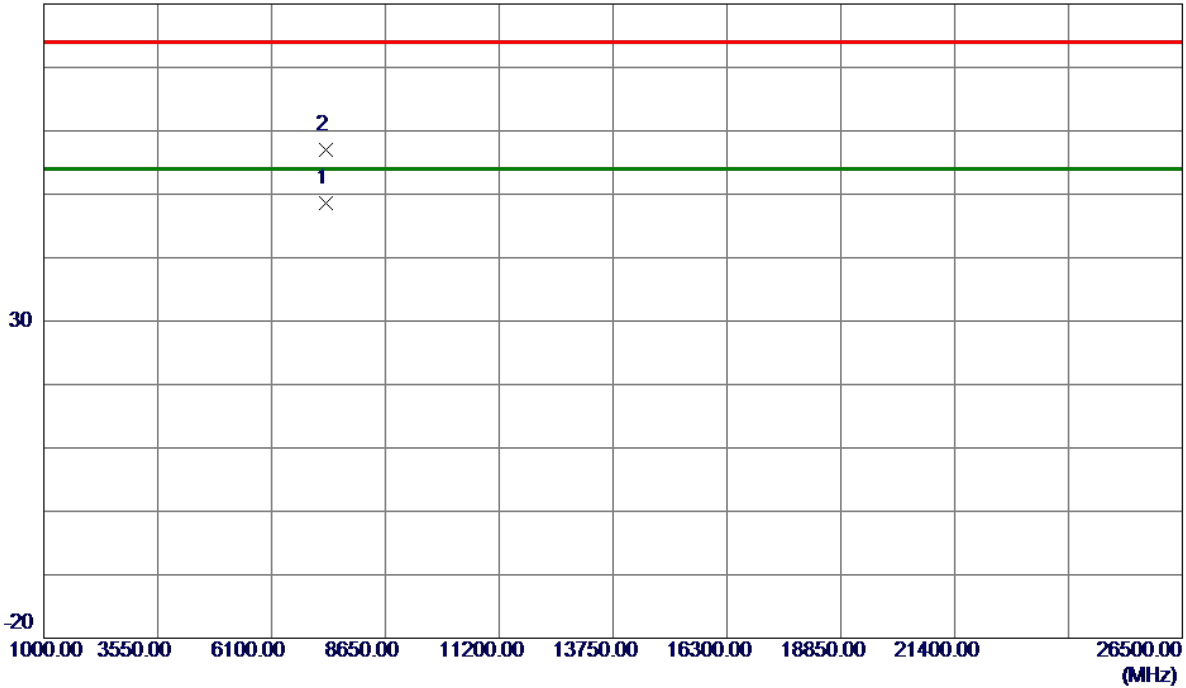


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7322.9600	37.34	11.17	48.51	54.00	-5.49	AVG	
2	7323.4250	45.76	11.17	56.93	74.00	-17.07	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2441 MHz \_CH39\_1Mbps

### Horizontal

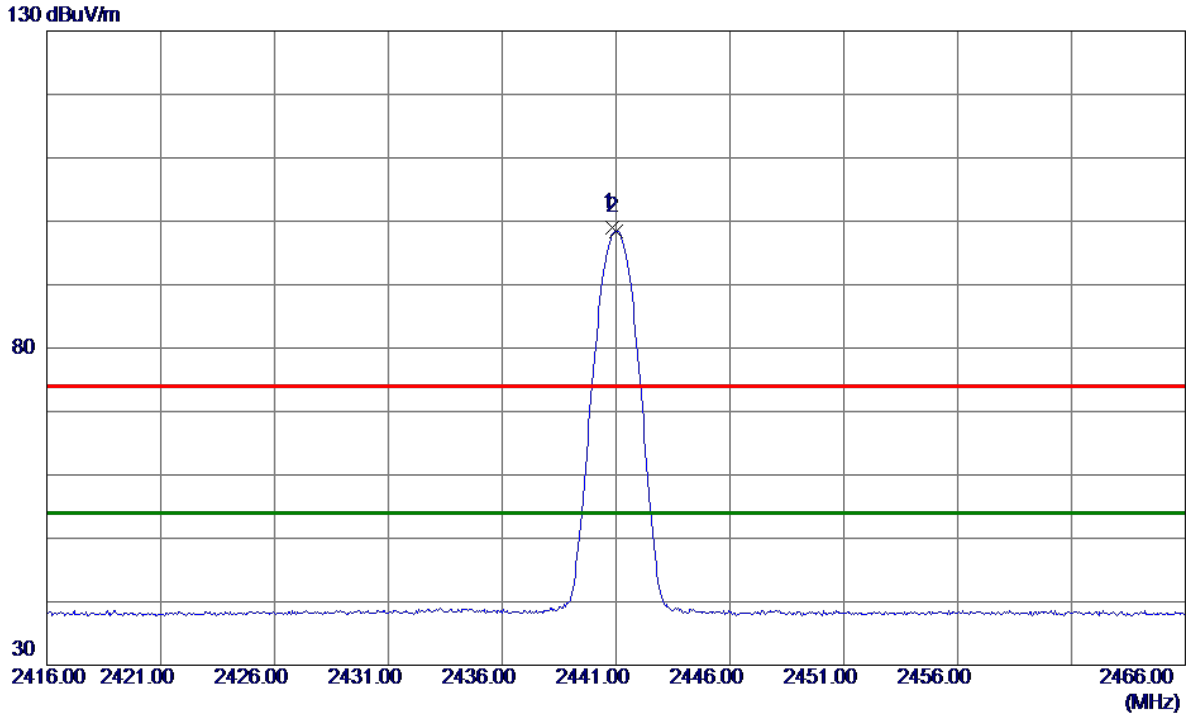

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2440.8500	90.57	8.34	98.91	74.00	24.91	Peak	No Limit
2 *	2441.0000	90.15	8.34	98.49	54.00	44.49	AVG	No Limit


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2441 MHz \_CH39\_1Mbps

### Horizontal

80 dBuV/m

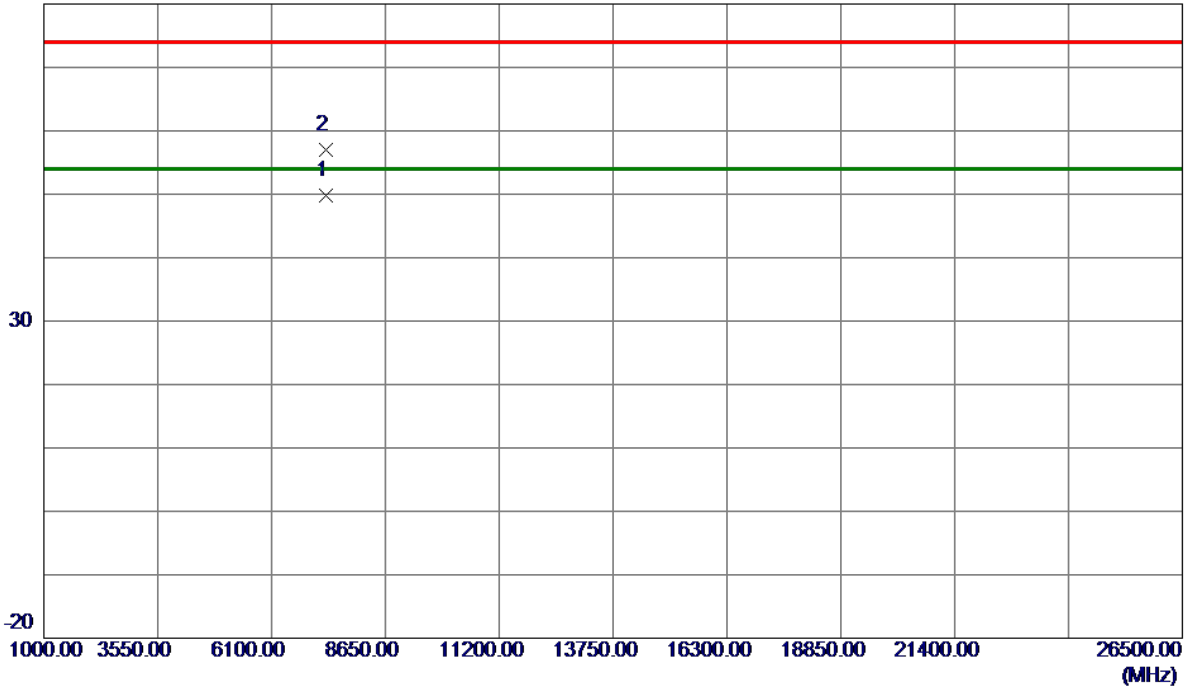


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7323.0450	38.55	11.17	49.72	54.00	-4.28	AVG	
2	7323.3800	45.89	11.17	57.06	74.00	-16.94	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2480 MHz \_CH78\_1Mbps

**Vertical**

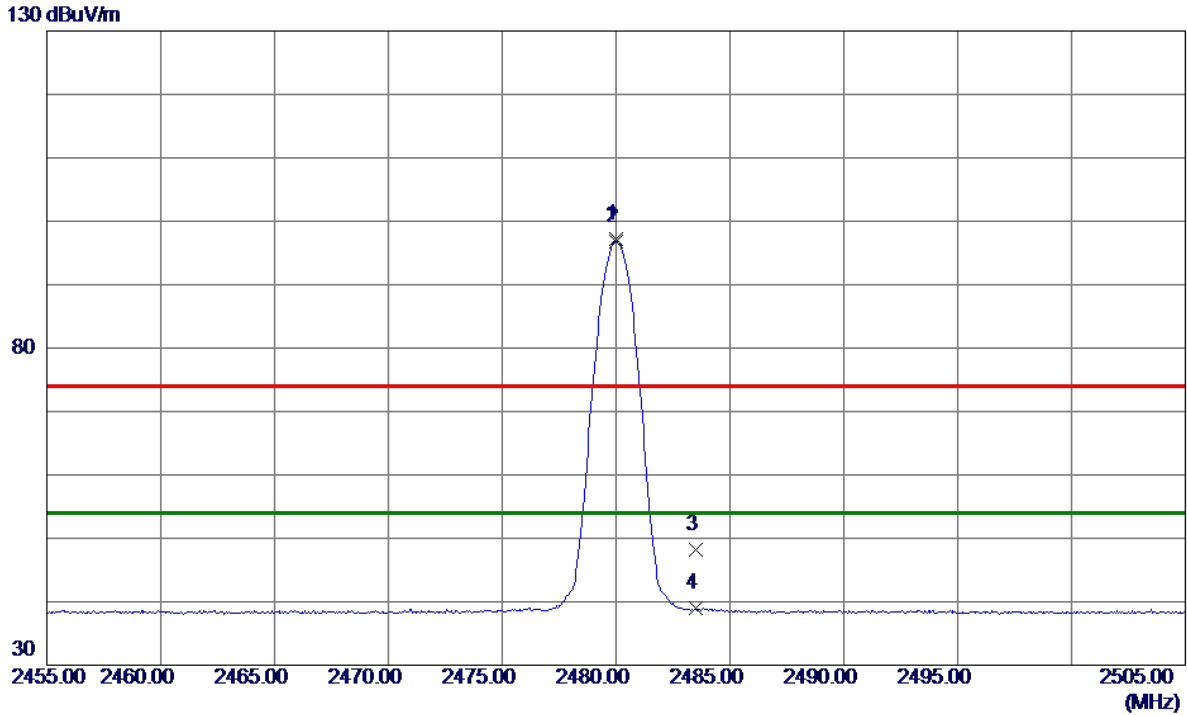

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2480.0000	88.81	8.38	97.19	74.00	23.19	Peak	No Limit
2 *	2480.0000	88.41	8.38	96.79	54.00	42.79	AVG	No Limit
3	2483.5000	39.77	8.39	48.16	74.00	-25.84	Peak	
4	2483.5000	30.55	8.39	38.94	54.00	-15.06	AVG	

**REMARKS:**


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode: TX 2480 MHz \_CH78\_1Mbps

**Vertical**

80 dBuV/m

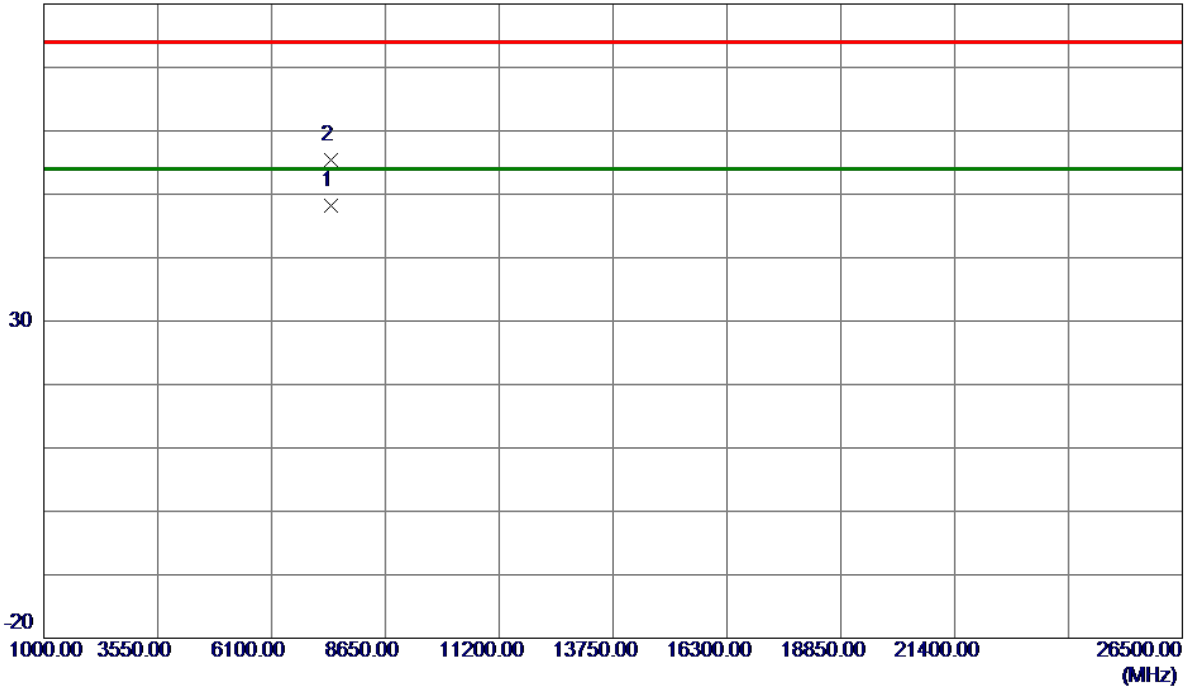


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7440.0050	36.83	11.39	48.22	54.00	-5.78	AVG	
2	7440.4350	43.99	11.39	55.38	74.00	-18.62	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2480 MHz \_CH78\_1Mbps

### Horizontal

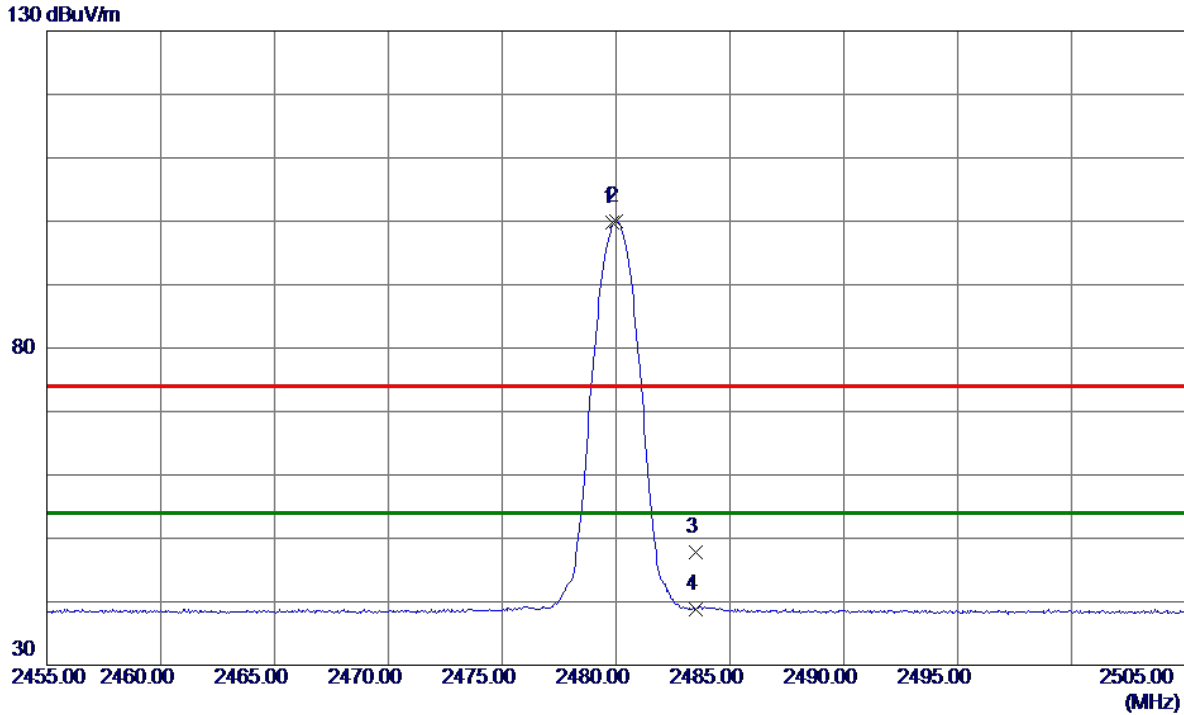

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2479.8500	91.45	8.38	99.83	74.00	25.83	Peak	No Limit
2 *	2480.0000	91.53	8.38	99.91	54.00	45.91	AVG	No Limit
3	2483.5000	39.42	8.39	47.81	74.00	-26.19	Peak	
4	2483.5000	30.44	8.39	38.83	54.00	-15.17	AVG	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2480 MHz \_CH78\_1Mbps

### Horizontal

80 dBuV/m

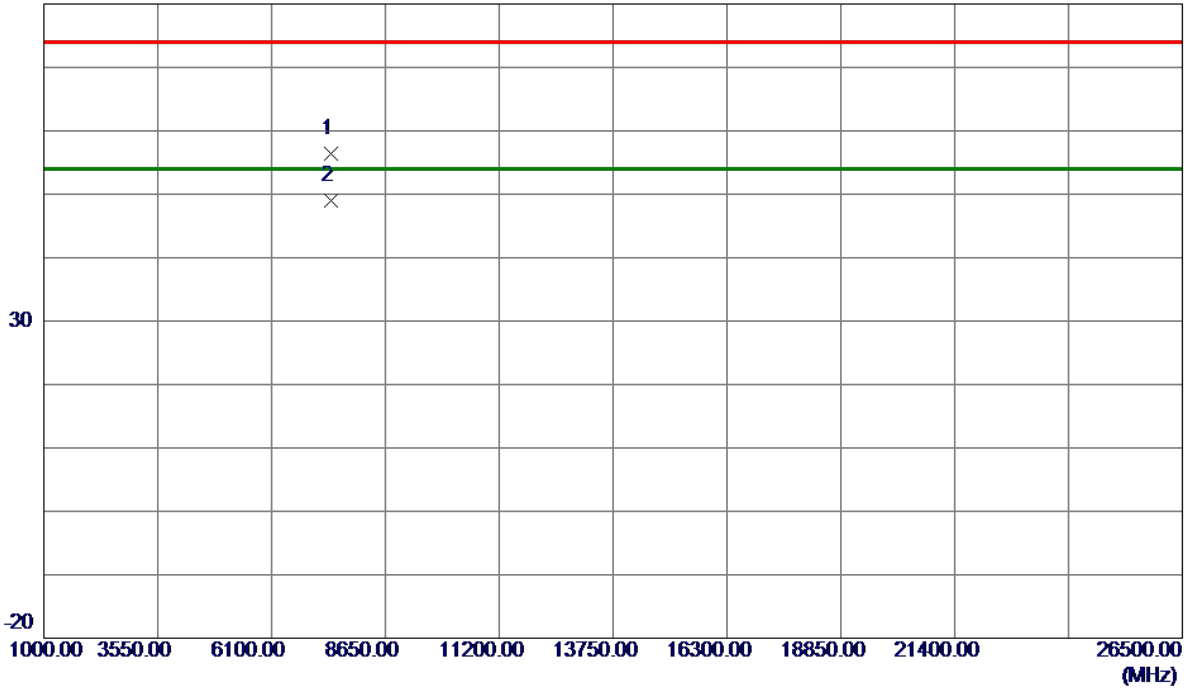


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7439.9800	45.04	11.39	56.43	74.00	-17.57	Peak	
2 *	7440.0350	37.64	11.39	49.03	54.00	-4.97	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2402 MHz \_CH00\_3Mbps

**Vertical**

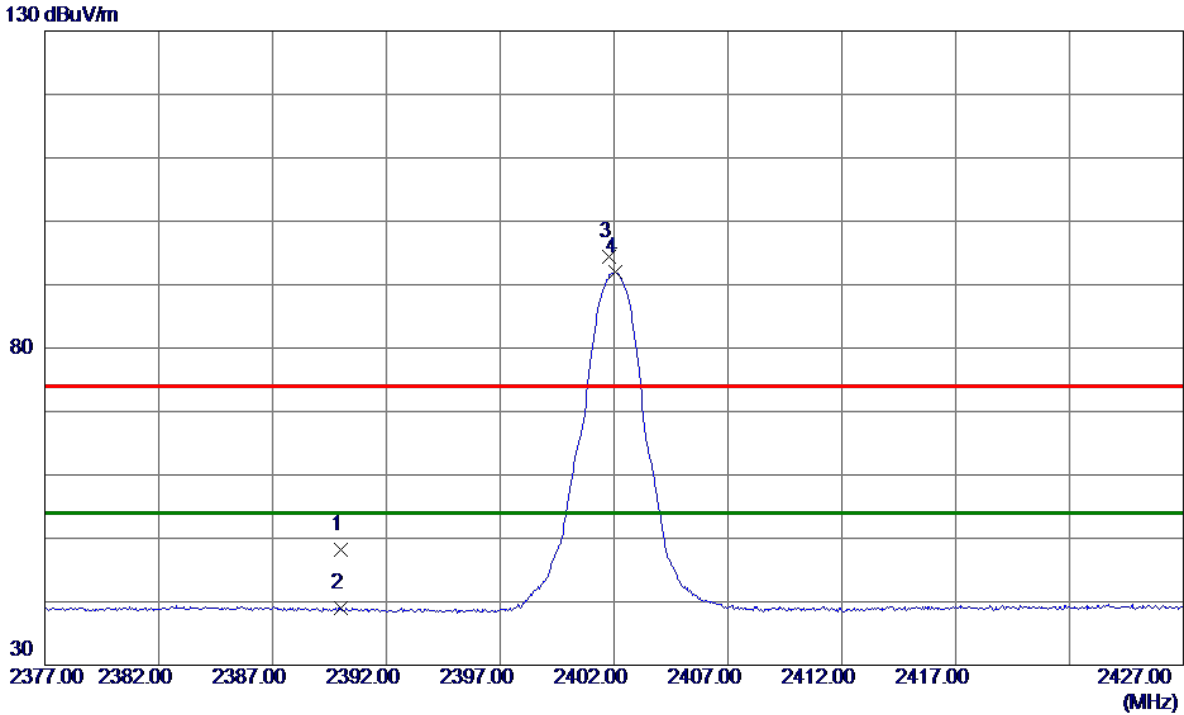

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	39.83	8.29	48.12	74.00	-25.88	Peak	
2	2390.0000	30.62	8.29	38.91	54.00	-15.09	AVG	
3	2401.8000	86.15	8.30	94.45	74.00	20.45	Peak	No Limit
4 *	2402.0500	83.68	8.30	91.98	54.00	37.98	AVG	No Limit

**REMARKS:**


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2402 MHz \_CH00\_3Mbps

**Vertical**

80 dBuV/m

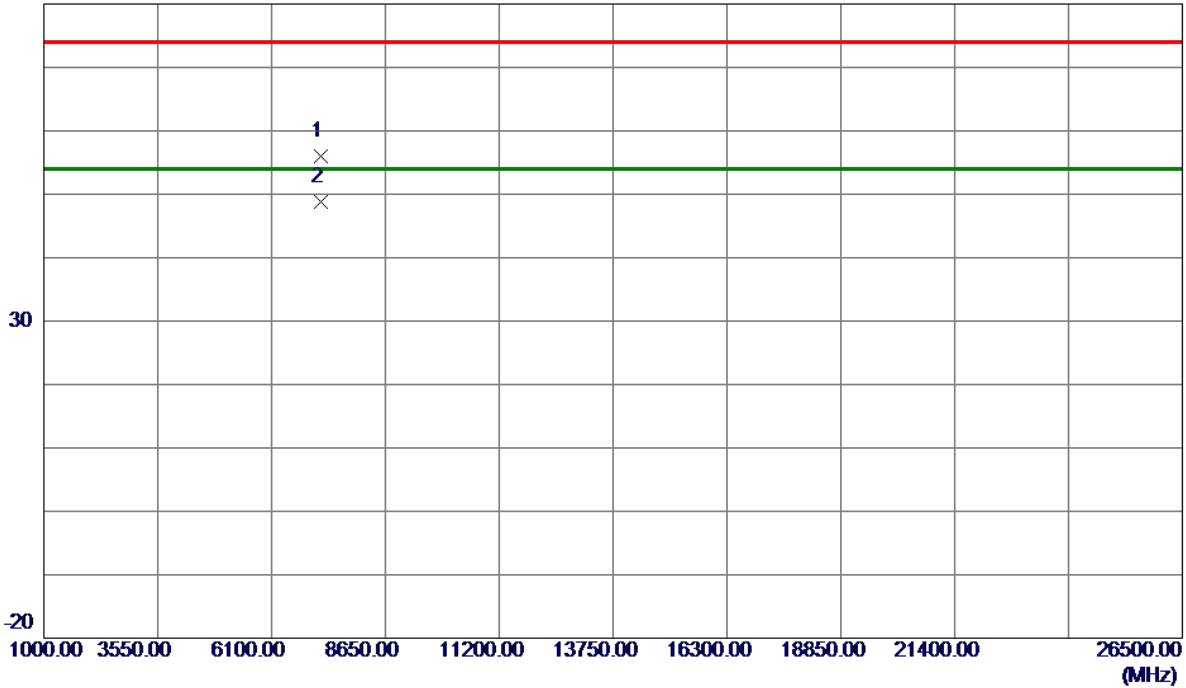


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7205.6750	45.01	10.95	55.96	74.00	-18.04	Peak	
2 *	7205.9850	37.85	10.95	48.80	54.00	-5.20	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2402 MHz \_CH00\_3Mbps

### Horizontal

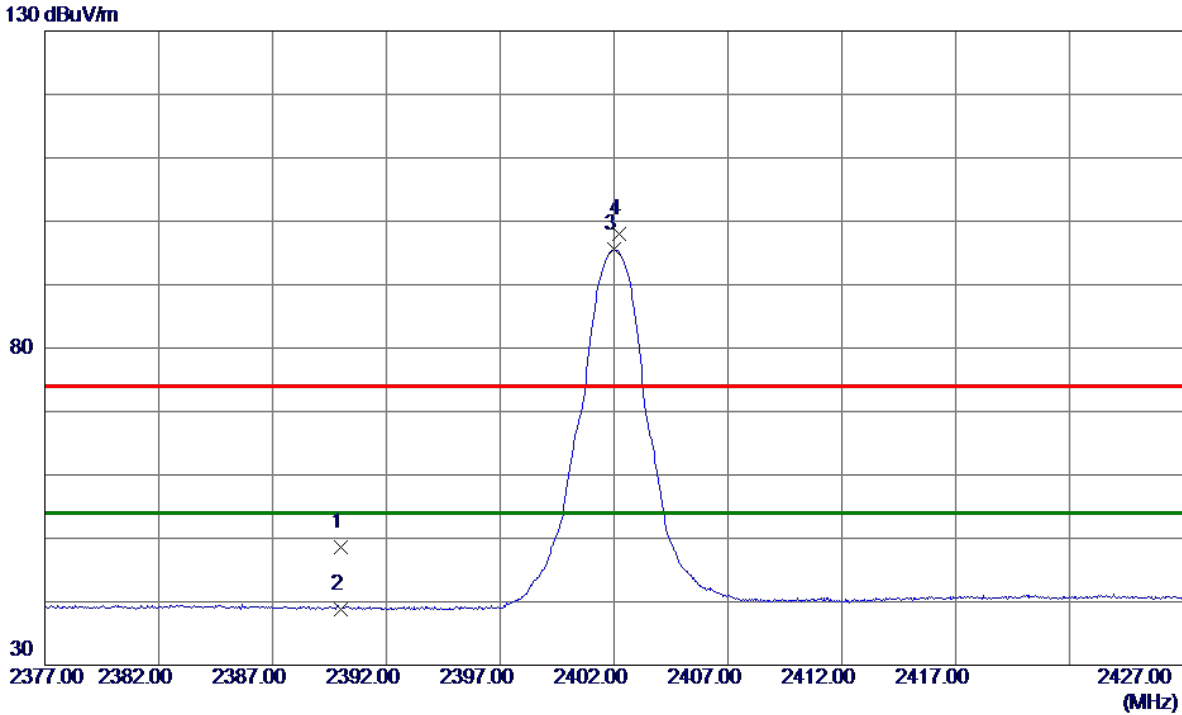


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	40.25	8.29	48.54	74.00	-25.46	Peak	
2	2390.0000	30.58	8.29	38.87	54.00	-15.13	AVG	
3 *	2402.0000	87.26	8.30	95.56	54.00	41.56	AVG	No Limit
4	2402.2000	89.68	8.30	97.98	74.00	23.98	Peak	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2402 MHz \_CH00\_3Mbps

### Horizontal

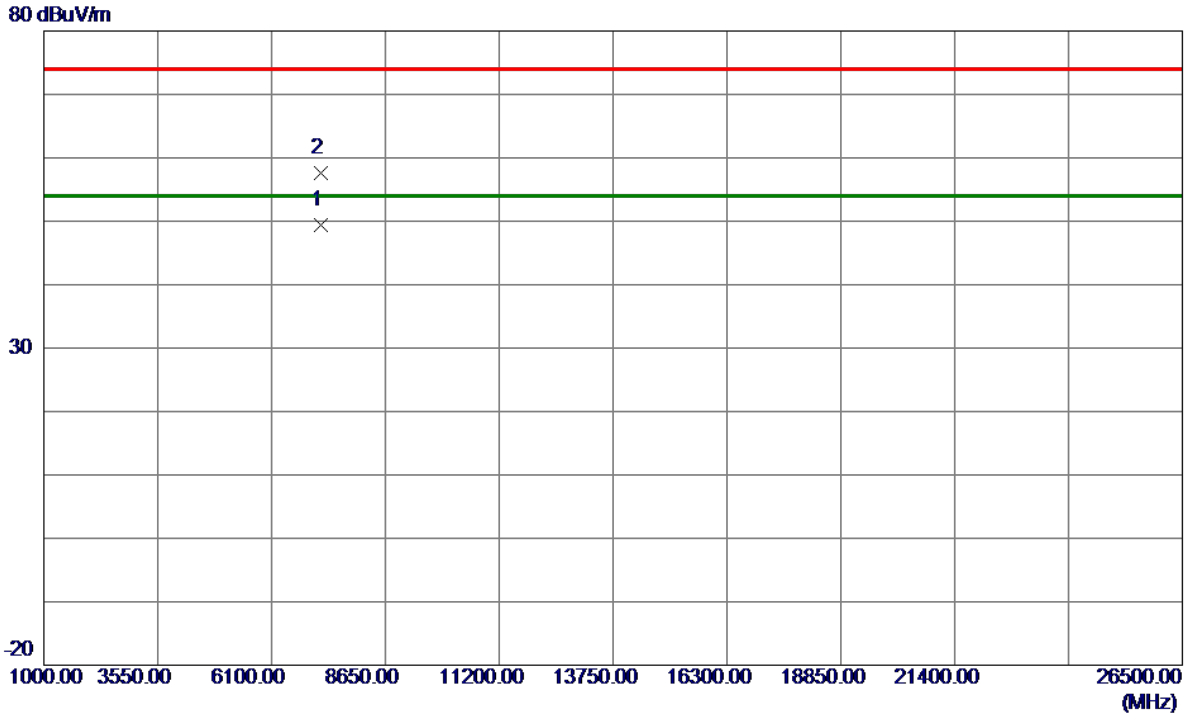


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7206.0350	38.43	10.95	49.38	54.00	-4.62	AVG	
2	7206.0400	46.57	10.95	57.52	74.00	-16.48	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2441 MHz \_CH39\_3Mbps

**Vertical**

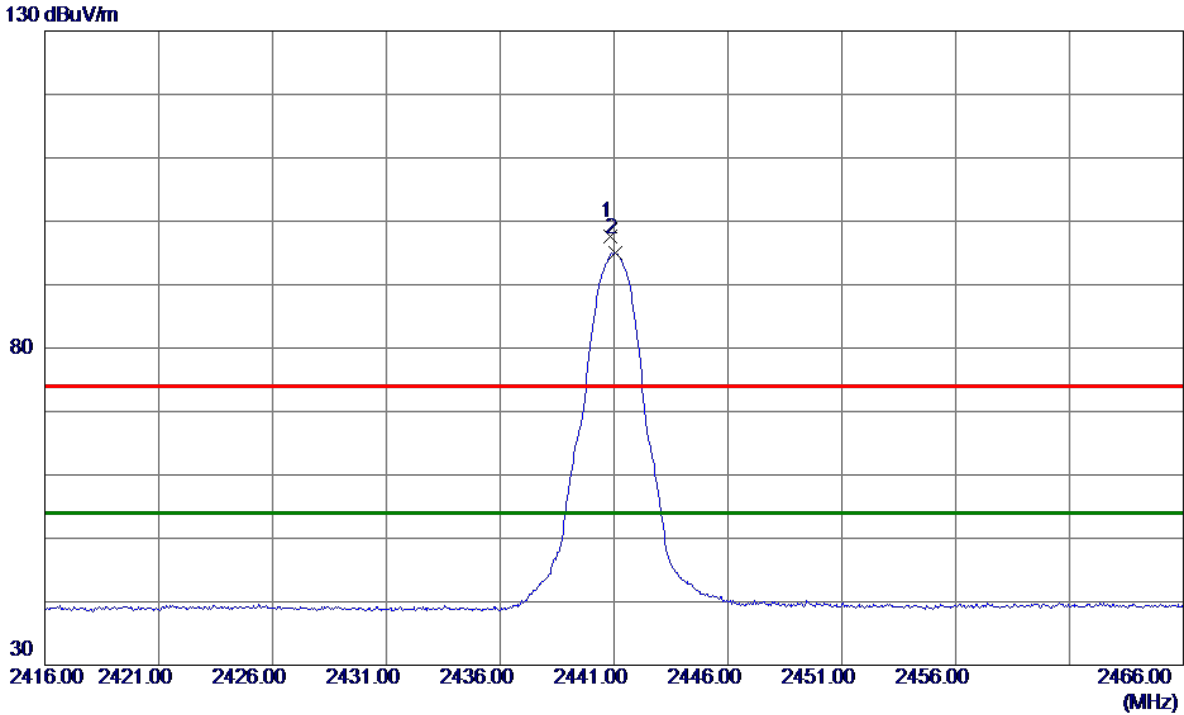

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2440.8500	89.19	8.34	97.53	74.00	23.53	Peak	No Limit
2 *	2441.0500	86.67	8.34	95.01	54.00	41.01	AVG	No Limit

**REMARKS:**


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode: TX 2441 MHz \_CH39\_3Mbps

**Vertical**

80 dBuV/m

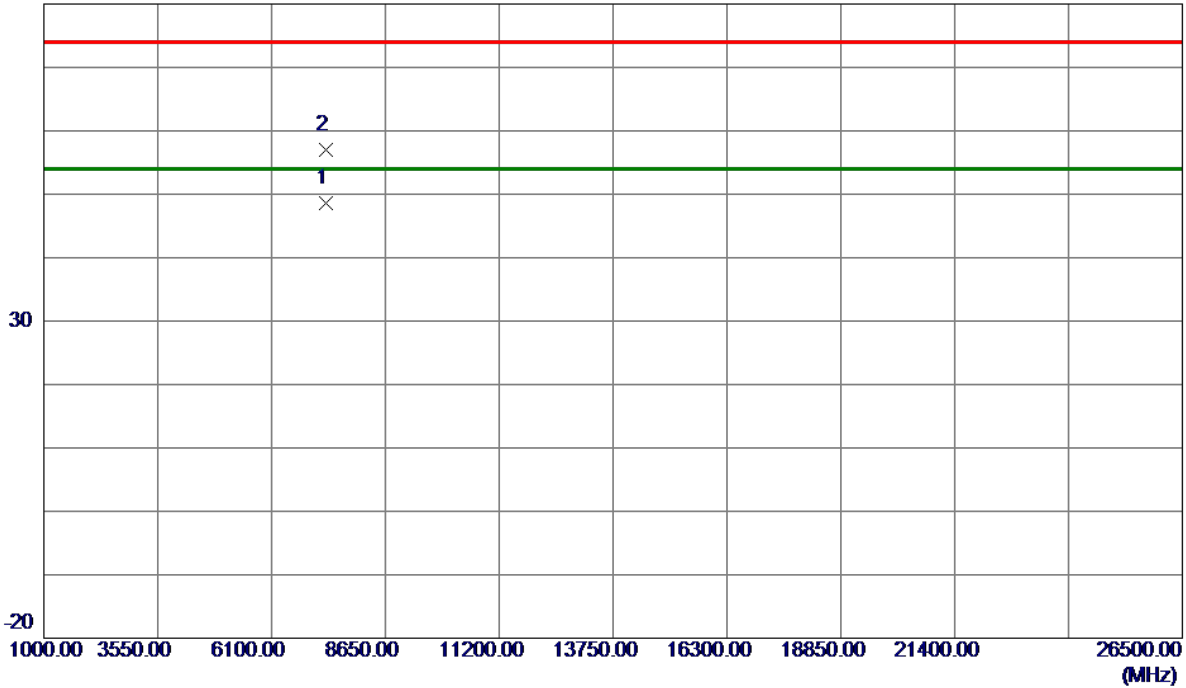


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7323.0800	37.37	11.17	48.54	54.00	-5.46	AVG	
2	7323.5100	45.90	11.17	57.07	74.00	-16.93	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2441 MHz \_CH39\_3Mbps

### Horizontal

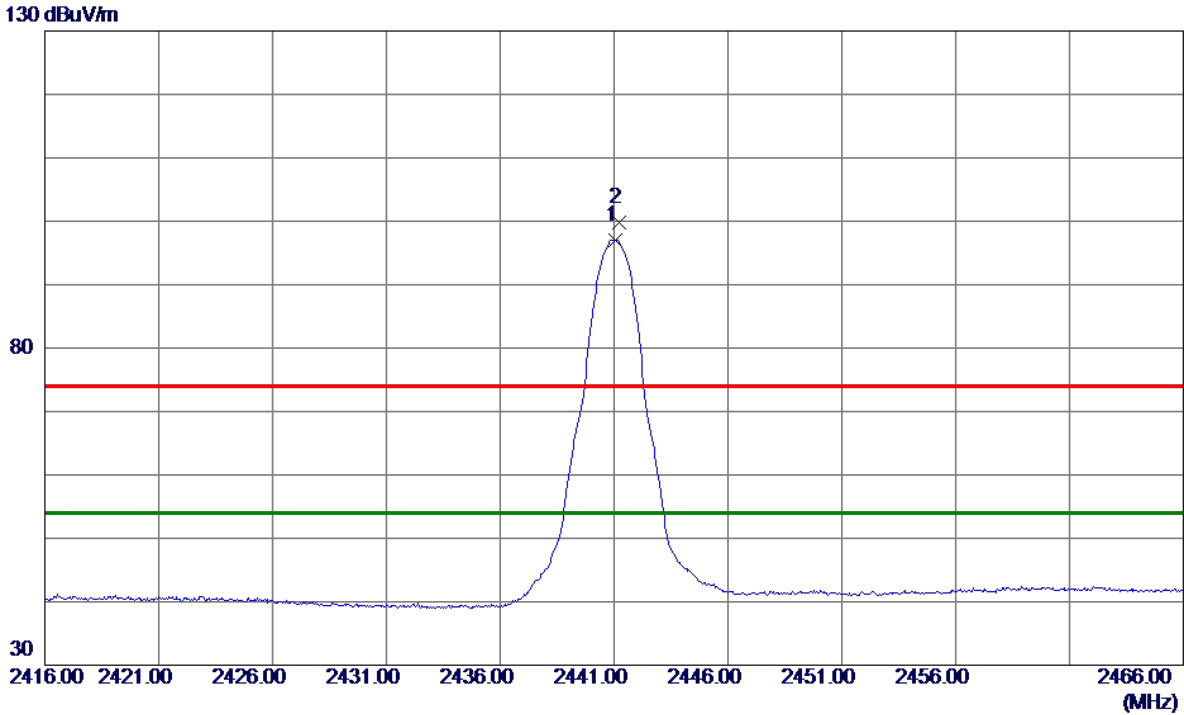

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2441.0500	88.72	8.34	97.06	54.00	43.06	AVG	No Limit
2	2441.2000	91.38	8.34	99.72	74.00	25.72	Peak	No Limit


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2441 MHz \_CH39\_3Mbps

### Horizontal

80 dBuV/m

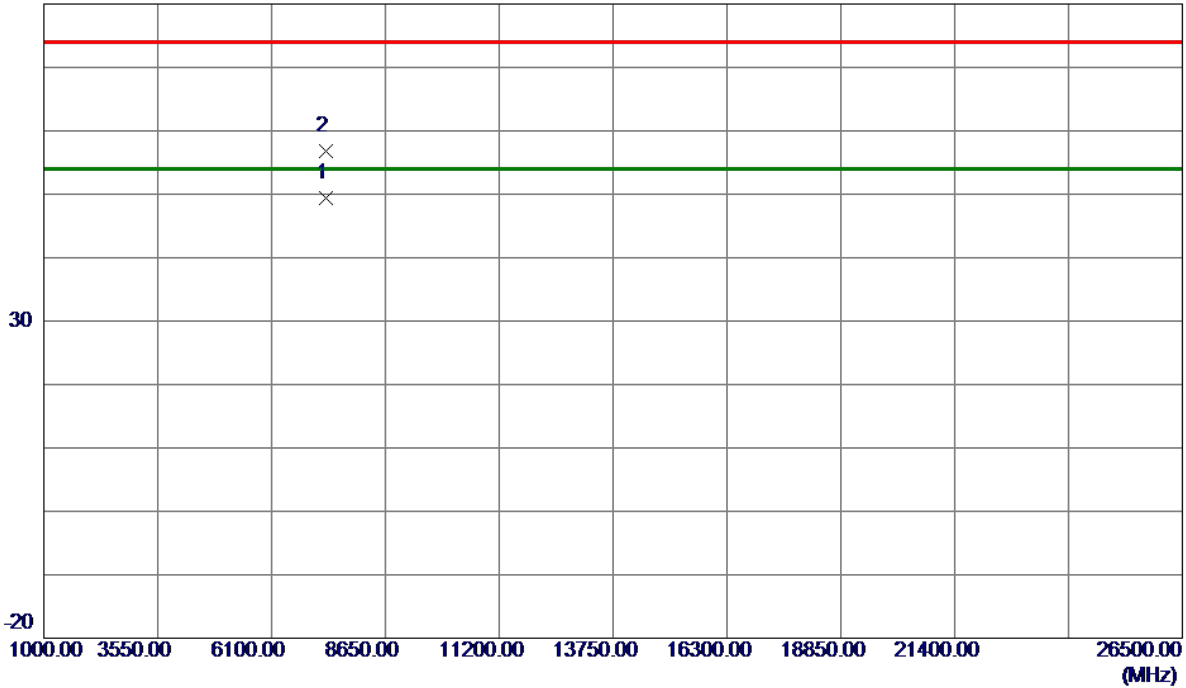


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7323.0550	38.23	11.17	49.40	54.00	-4.60	AVG	
2	7323.2850	45.69	11.17	56.86	74.00	-17.14	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2480 MHz \_CH78\_3Mbps

**Vertical**

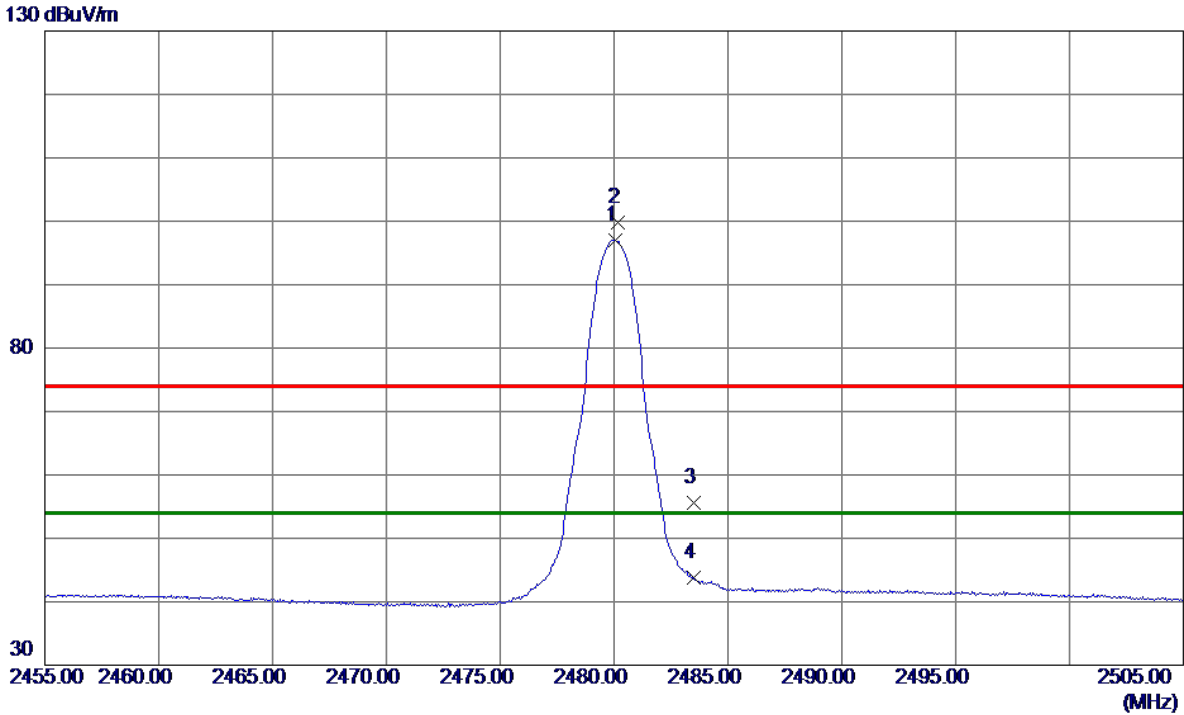

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2480.0500	88.71	8.38	97.09	54.00	43.09	AVG	No Limit
2	2480.1500	91.33	8.38	99.71	74.00	25.71	Peak	No Limit
3	2483.5000	47.24	8.39	55.63	74.00	-18.37	Peak	
4	2483.5000	35.33	8.39	43.72	54.00	-10.28	AVG	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2480 MHz \_CH78\_3Mbps

**Vertical**

80 dBuV/m

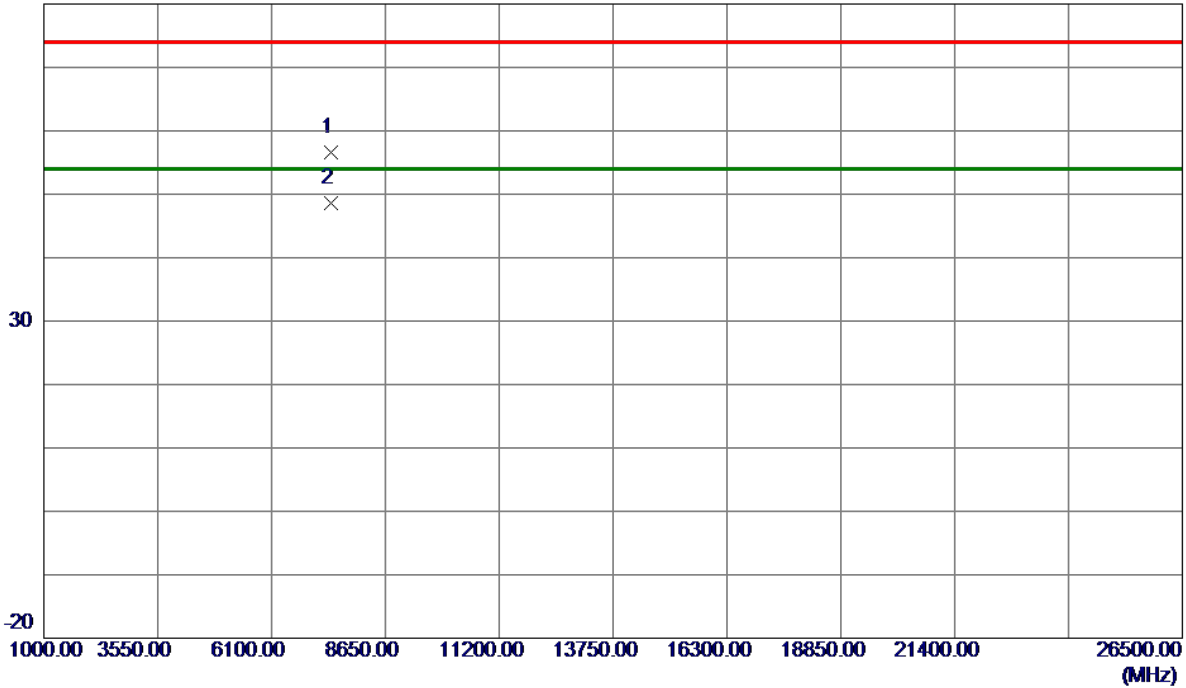


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7439.4800	45.13	11.39	56.52	74.00	-17.48	Peak	
2 *	7439.9400	37.20	11.39	48.59	54.00	-5.41	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2480 MHz \_CH78\_3Mbps

### Horizontal

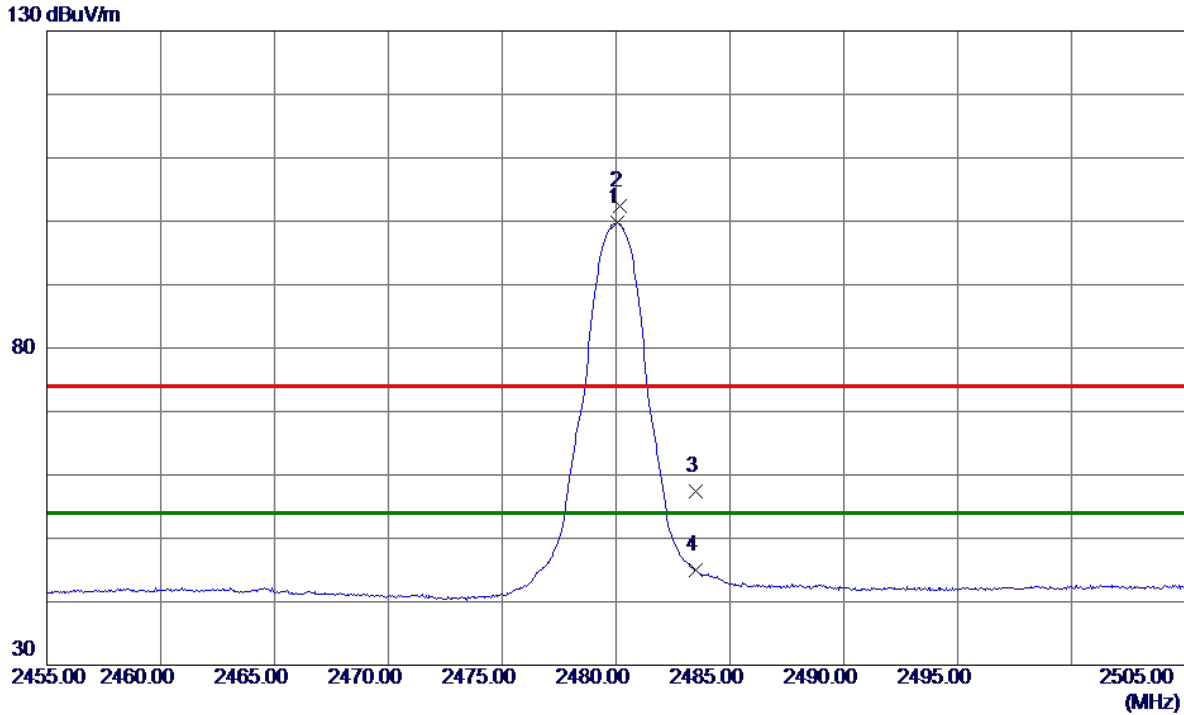

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2480.0500	91.34	8.38	99.72	54.00	45.72	AVG	No Limit
2	2480.1500	94.02	8.38	102.40	74.00	28.40	Peak	No Limit
3	2483.5000	49.04	8.39	57.43	74.00	-16.57	Peak	
4	2483.5000	36.53	8.39	44.92	54.00	-9.08	AVG	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2480 MHz \_CH78\_3Mbps

### Horizontal

80 dBuV/m

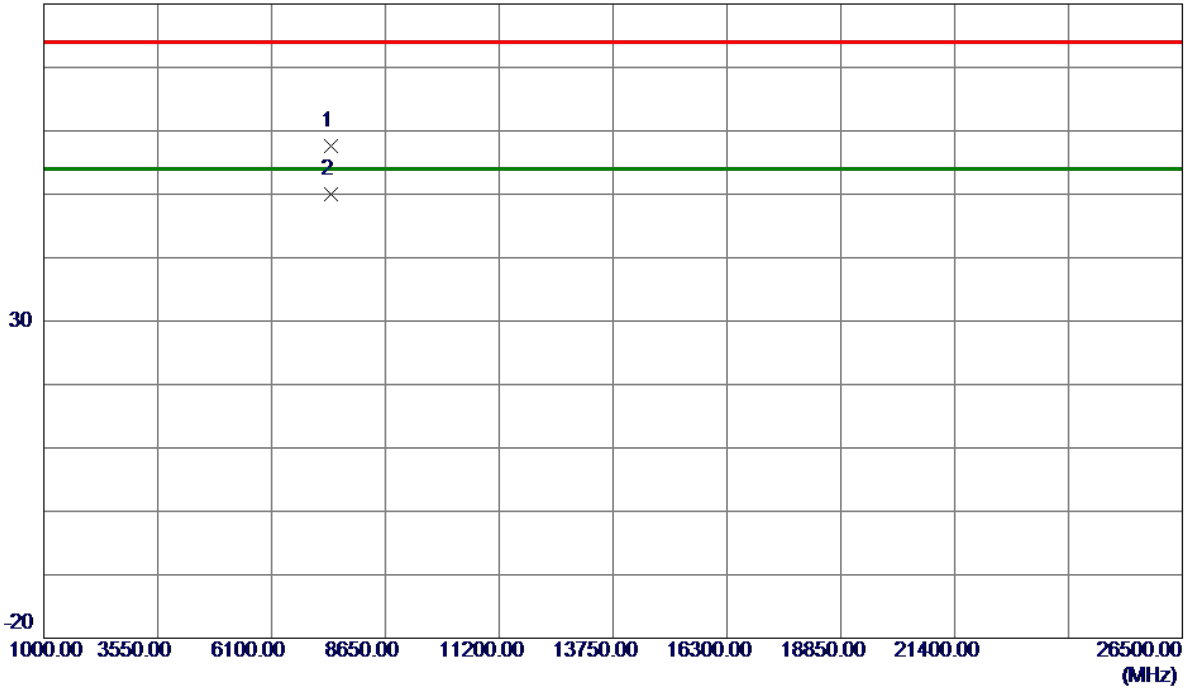

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7439.6450	46.19	11.39	57.58	74.00	-16.42	Peak	
2 *	7440.0300	38.54	11.39	49.93	54.00	-4.07	AVG	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## **APPENDIX E - NUMBER OF HOPPING FREQUENCY**




Test Mode	Hopping Mode_1Mbps
Number of Hopping Frequency	79

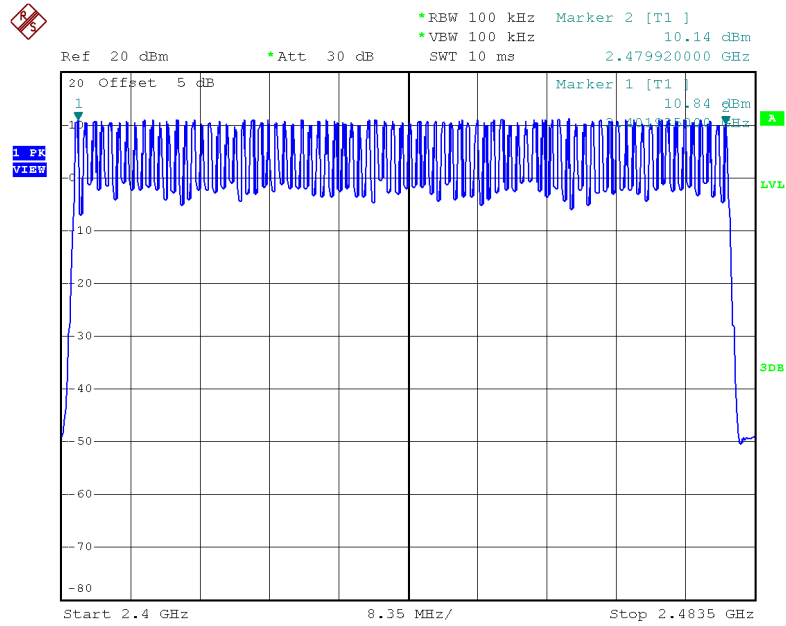

Date: 4.AUG.2020 11:41:05

Test Mode	Hopping Mode_3Mbps
Number of Hopping Frequency	79

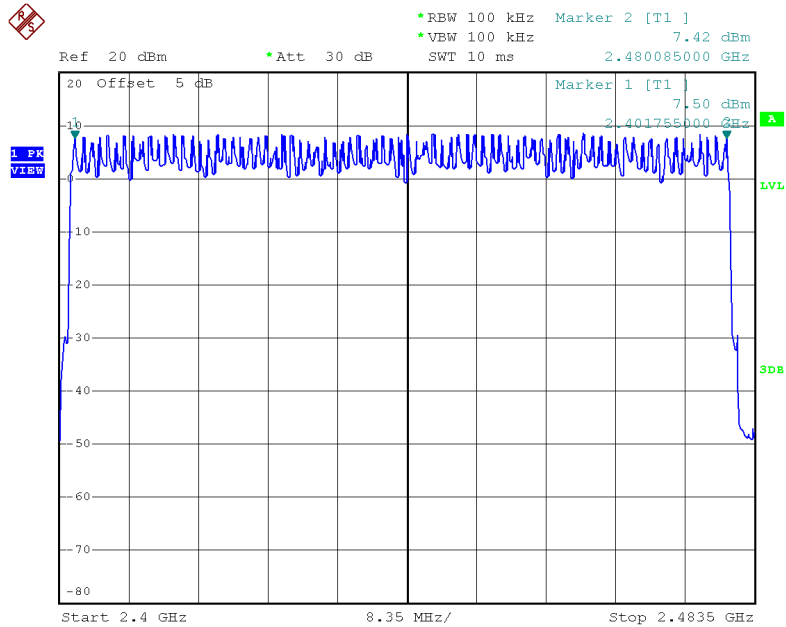


Date: 4.AUG.2020 13:47:58


**APPENDIX F - AVERAGE TIME OF OCCUPANCY**

Test Mode:	TX Mode_1Mbps
------------	---------------


Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
DH1	2402	0.4000	0.1280	0.4000	Pass
DH3	2402	1.6600	0.2656	0.4000	Pass
DH5	2402	2.9200	0.3115	0.4000	Pass
DH1	2441	0.4000	0.1280	0.4000	Pass
DH3	2441	1.6600	0.2656	0.4000	Pass
DH5	2441	2.9200	0.3115	0.4000	Pass
DH1	2480	0.4000	0.1280	0.4000	Pass
DH3	2480	1.6600	0.2656	0.4000	Pass
DH5	2480	2.8800	0.3072	0.4000	Pass

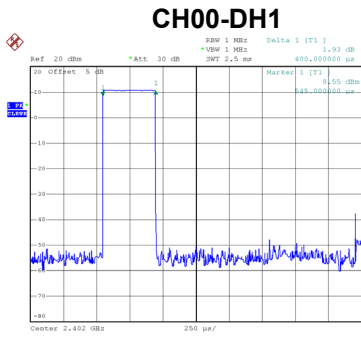


Date: 4.AUG.2020 11:34:39

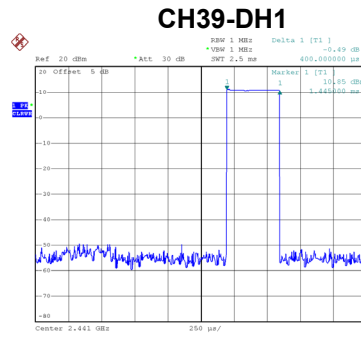


Date: 4.AUG.2020 11:35:29

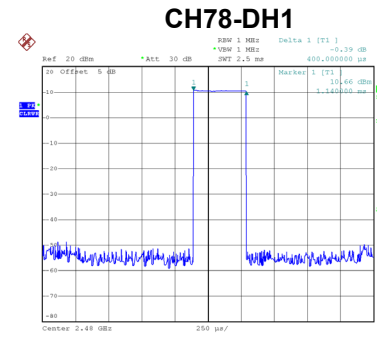


Date: 4.AUG.2020 11:35:40

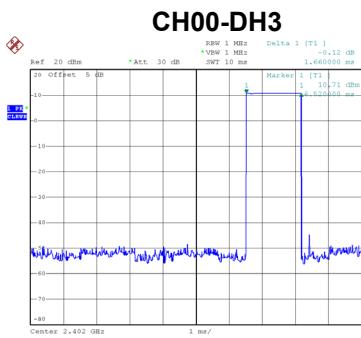


Date: 4.AUG.2020 11:50:37

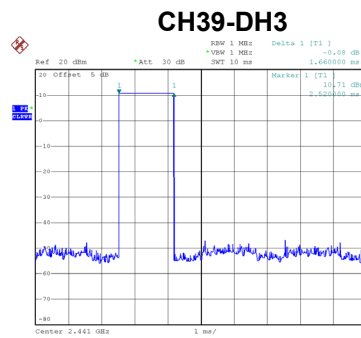


Date: 4.AUG.2020 11:50:56

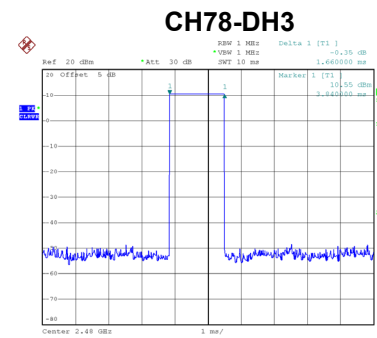


Date: 4.AUG.2020 11:53:21

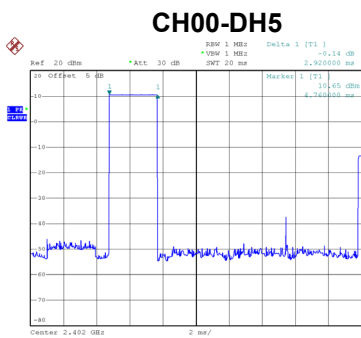

Date: 4.AUG.2020 11:54:40

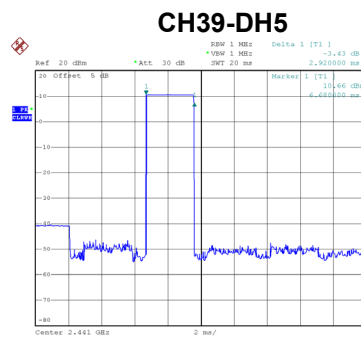


Date: 4.AUG.2020 11:59:29

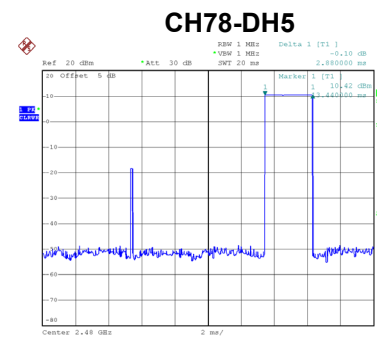


Date: 4.AUG.2020 12:00:39

Test Mode:	TX Mode_3Mbps
------------	---------------


Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
3DH1	2402	0.4050	0.1296	0.4000	Pass
3DH3	2402	1.6600	0.2656	0.4000	Pass
3DH5	2402	2.9200	0.3115	0.4000	Pass
3DH1	2441	0.4050	0.1296	0.4000	Pass
3DH3	2441	1.6600	0.2656	0.4000	Pass
3DH5	2441	2.9200	0.3115	0.4000	Pass
3DH1	2480	0.4000	0.1280	0.4000	Pass
3DH3	2480	1.6600	0.2656	0.4000	Pass
3DH5	2480	2.8800	0.3072	0.4000	Pass

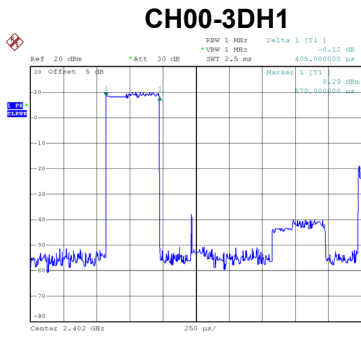


Date: 4.AUG.2020 12:01:11

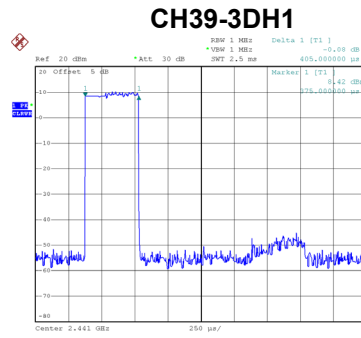


Date: 4.AUG.2020 12:01:16

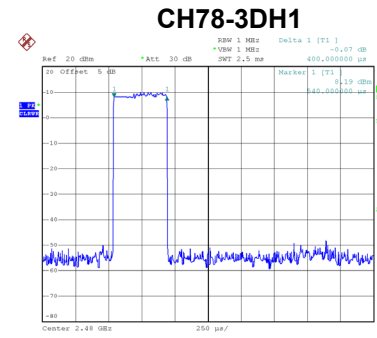


Date: 4.AUG.2020 12:01:21

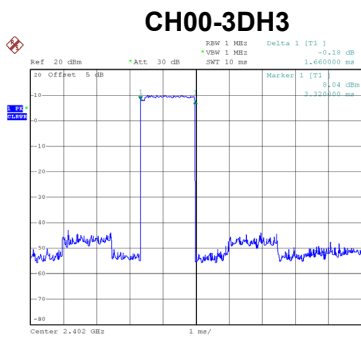


Date: 4.AUG.2020 13:56:13

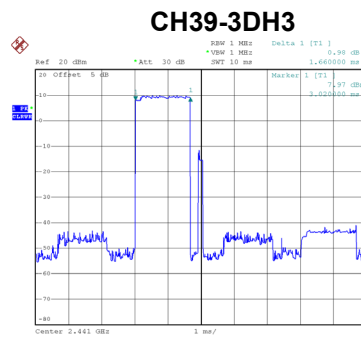


Date: 4.AUG.2020 13:56:19

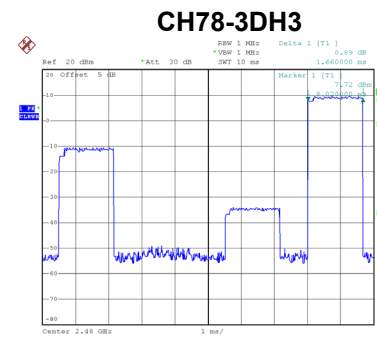


Date: 4.AUG.2020 13:56:43

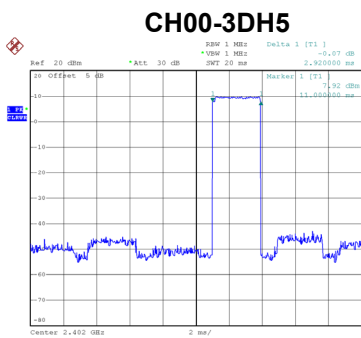

Date: 4.AUG.2020 13:56:55

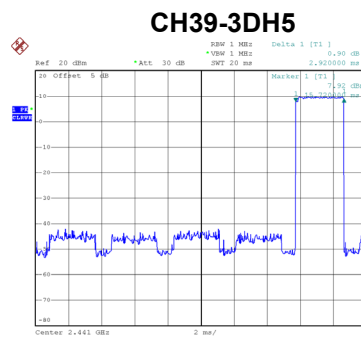

Date: 4.AUG.2020 13:56:59

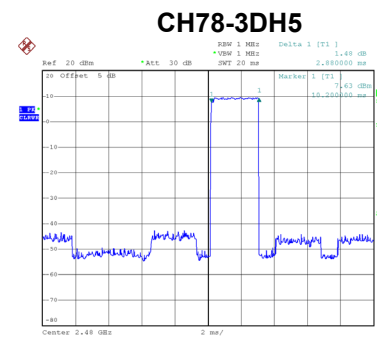


Date: 4.AUG.2020 13:57:04


## **APPENDIX G - HOPPING CHANNEL SEPARATION MEASUREMENT**

Test Mode: Hopping on \_1Mbps


Channel	Frequency (MHz)	Channel Separation (MHz)	2/3 of 20 dB Bandwidth (MHz)	Test Result
00	2402	1.328	0.635	Pass
39	2441	1.009	0.629	Pass
78	2480	1.015	0.615	Pass

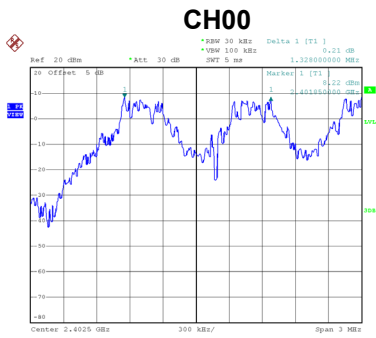

Date: 4.AUG.2020 11:36:52

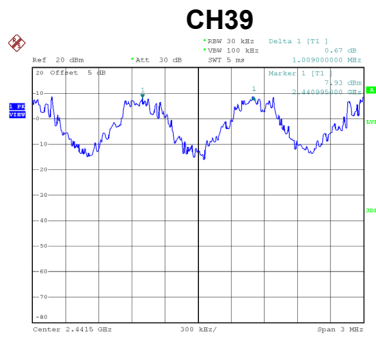


Date: 4.AUG.2020 11:38:03

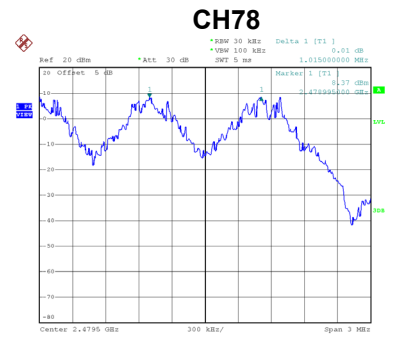


Date: 4.AUG.2020 11:39:13

Test Mode: Hopping on \_3Mbps


Channel	Frequency (MHz)	Channel Separation (MHz)	2/3 of 20 dB Bandwidth (MHz)	Test Result
00	2402	1.145	0.841	Pass
39	2441	1.012	0.867	Pass
78	2480	1.007	0.848	Pass

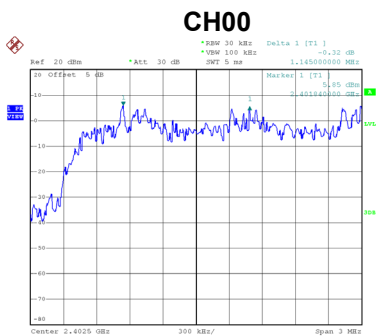

Date: 4.AUG.2020 13:46:05

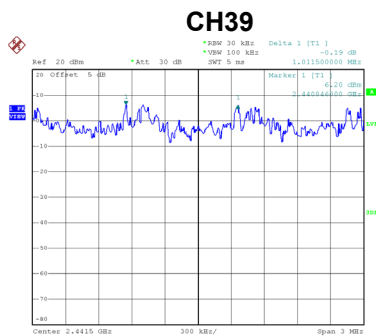

Date: 4.AUG.2020 12:03:39

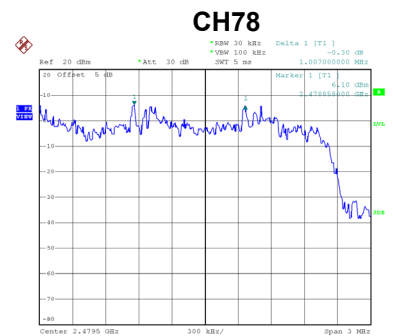


Date: 4.AUG.2020 12:04:51




## APPENDIX H - BANDWIDTH

Test Mode: TX Mode\_1Mbps


Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
00	2402	0.953	0.896
39	2441	0.944	0.888
78	2480	0.922	0.872

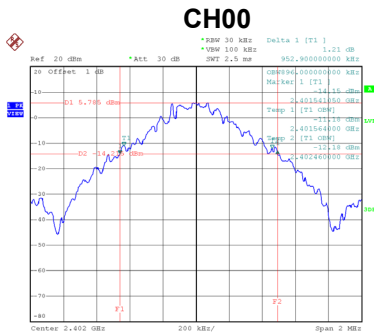

Date: 4.AUG.2020 10:15:42

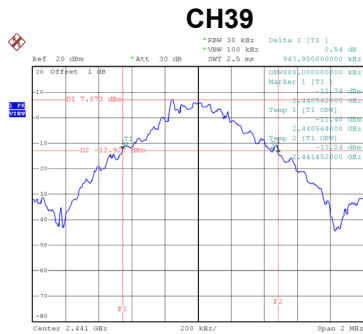


Date: 4.AUG.2020 10:18:10

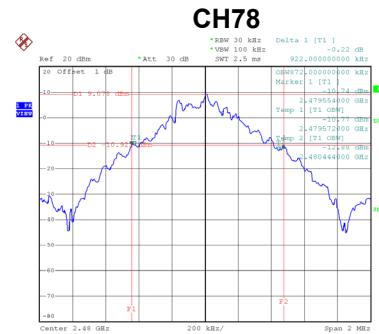


Date: 4.AUG.2020 10:23:03

Test Mode: TX Mode\_3Mbps


Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
00	2402	1.262	1.192
39	2441	1.301	1.204
78	2480	1.272	1.200

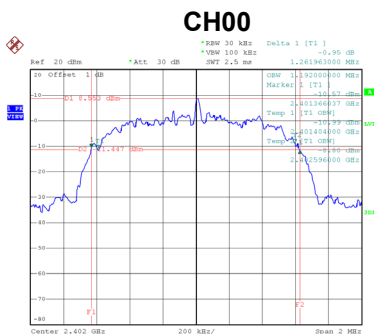

Date: 4.AUG.2020 14:03:33

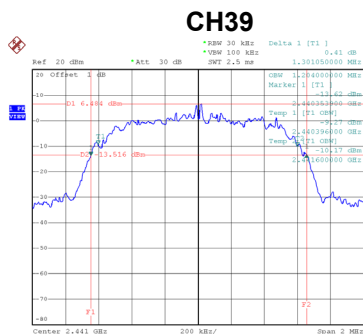

Date: 4.AUG.2020 14:05:35

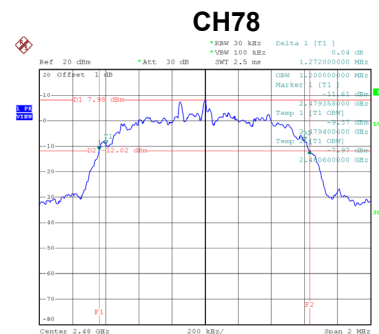

Date: 4.AUG.2020 14:07:03


## **APPENDIX I - MAXIMUM OUTPUT POWER**

Test Mode: TX Mode\_1Mbps


Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
00	2402	7.81	0.0060	21.00	0.125	Pass
39	2441	8.00	0.0063	21.00	0.125	Pass
78	2480	8.17	0.0066	21.00	0.125	Pass

Channel	Frequency (MHz)	Average Output Power (dBm)	Average Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
00	2402	7.76	0.0060	21.00	0.125	Pass
39	2441	7.85	0.0061	21.00	0.125	Pass
78	2480	8.04	0.0064	21.00	0.125	Pass


**CH00**

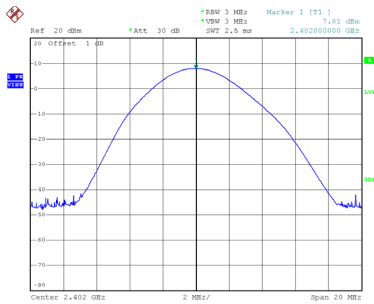




**CH39**  
**Peak Output Power**

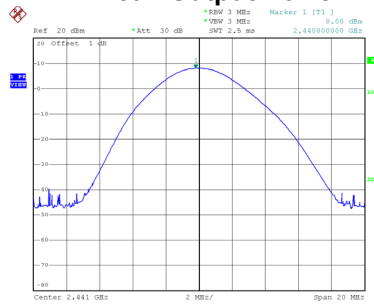

**CH78**

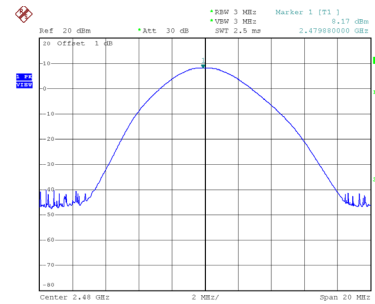

**Average Output Power**

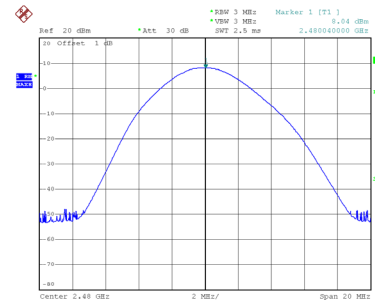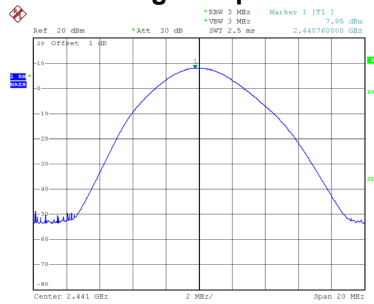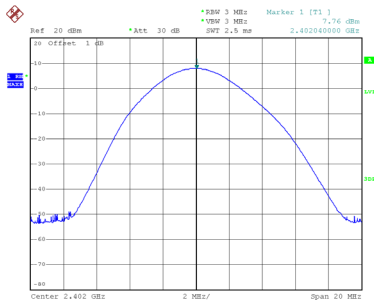


Test Mode: TX Mode\_2Mbps

Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
00	2402	9.77	0.0095	21.00	0.125	Pass
39	2441	9.85	0.0097	21.00	0.125	Pass
78	2480	10.03	0.0101	21.00	0.125	Pass


Channel	Frequency (MHz)	Average Output Power (dBm)	Average Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
00	2402	7.82	0.0061	21.00	0.125	Pass
39	2441	8.04	0.0064	21.00	0.125	Pass
78	2480	8.17	0.0066	21.00	0.125	Pass

**CH00**

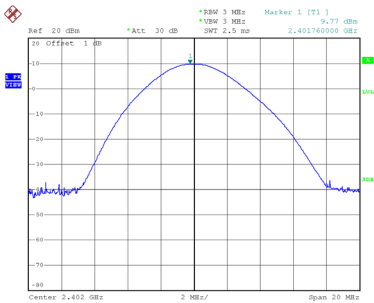


Date: 13.AUG.2020 20:01:18

**CH39**  
**Peak Output Power**

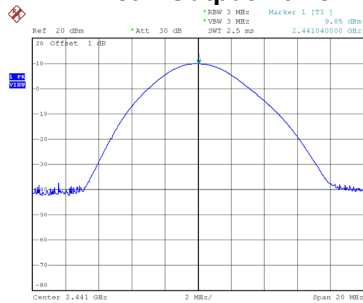


Date: 13.AUG.2020 20:01:39

**CH78**

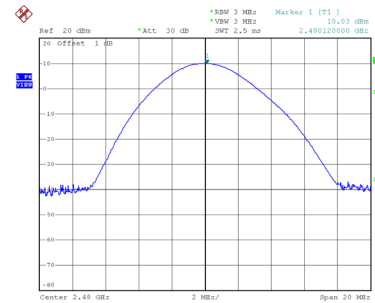


Date: 13.AUG.2020 20:01:59


**Average Output Power**

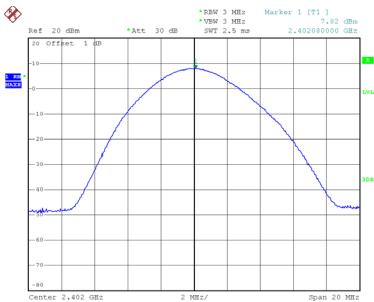

Date: 13.AUG.2020 20:11:02

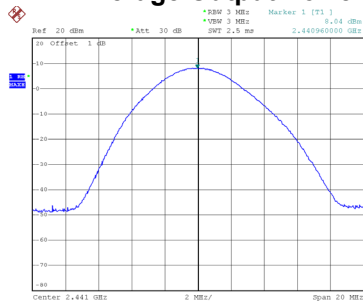

Date: 13.AUG.2020 20:12:06

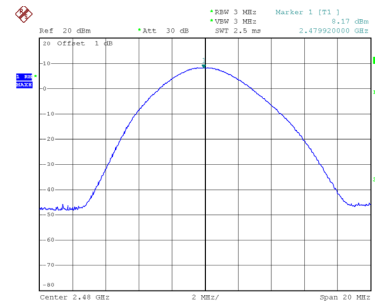


Date: 13.AUG.2020 20:12:46


Test Mode:	TX Mode_3Mbps
------------	---------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
00	2402	10.17	0.0104	21.00	0.125	Pass
39	2441	10.27	0.0106	21.00	0.125	Pass
78	2480	10.41	0.0110	21.00	0.125	Pass


Channel	Frequency (MHz)	Average Output Power (dBm)	Average Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
00	2402	7.80	0.0060	21.00	0.125	Pass
39	2441	8.15	0.0065	21.00	0.125	Pass
78	2480	8.46	0.0070	21.00	0.125	Pass

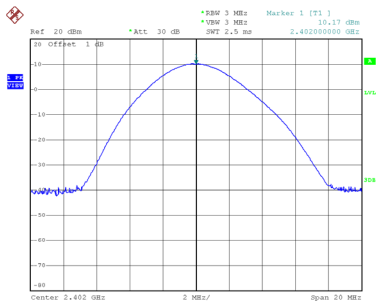**CH00**


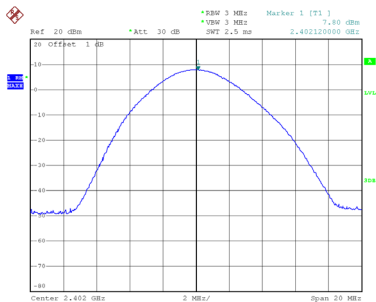
Date: 13.AUG.2020 19:59:16

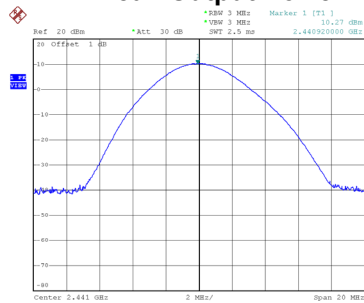**CH39**  
**Peak Output Power**


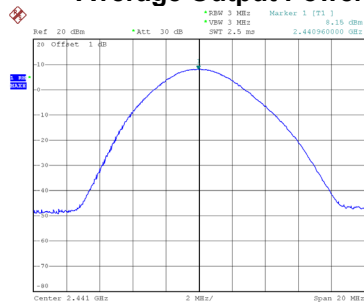
Date: 13.AUG.2020 19:59:40

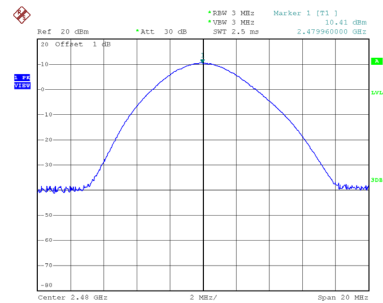**CH78**


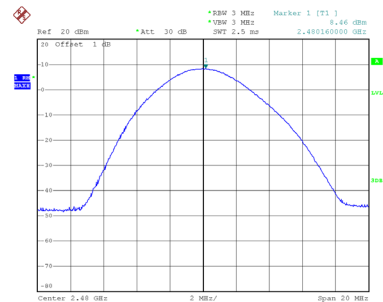
Date: 13.AUG.2020 19:59:58

**Average Output Power**


Date: 13.AUG.2020 20:10:30



Date: 13.AUG.2020 20:09:54




Date: 13.AUG.2020 20:09:22

## **APPENDIX J - CONDUCTED SPURIOUS EMISSION**


## Test Mode : TX Mode \_1Mbps

### Bandedge CH00 (Lower)

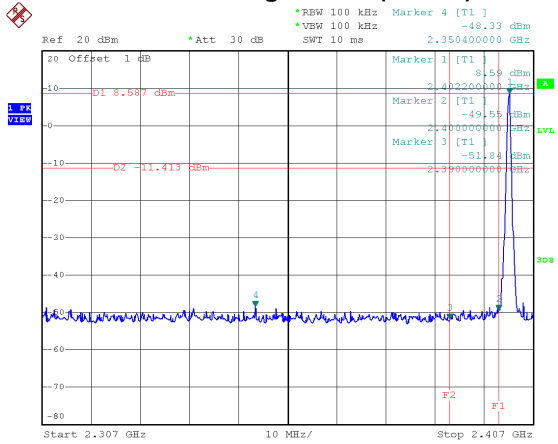


Date: 4.AUG.2020 10:14:59

### Bandedge CH78 (Upper)

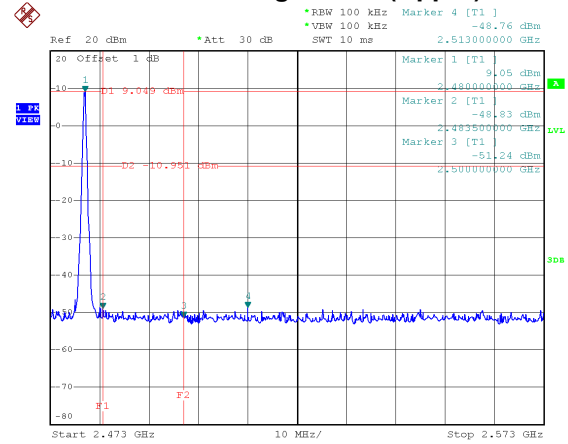


Date: 4.AUG.2020 10:22:13

### Hopping on mode (Lower)

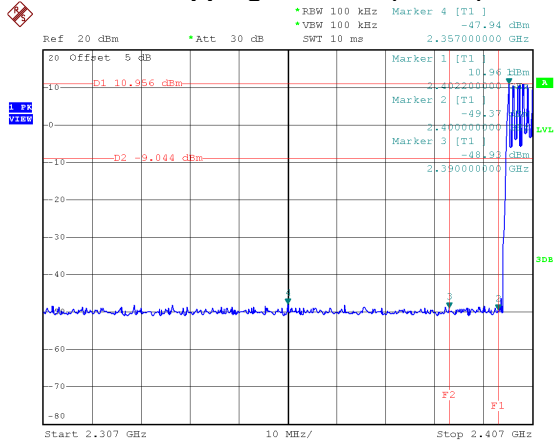

Date: 4.AUG.2020 11:41:58


### Hopping on mode (Upper)

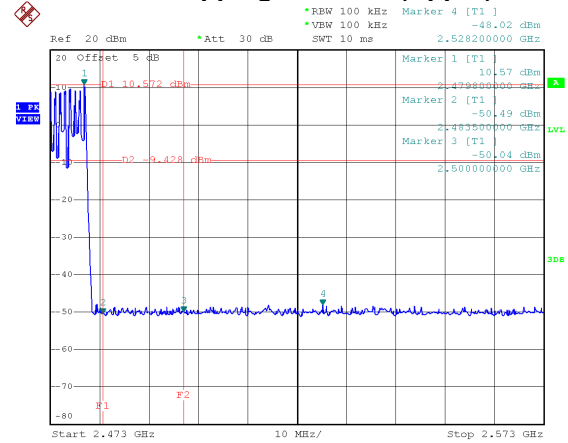


Date: 4.AUG.2020 11:42:33




## CH00 – 10th Harmonic of the fundamental frequency

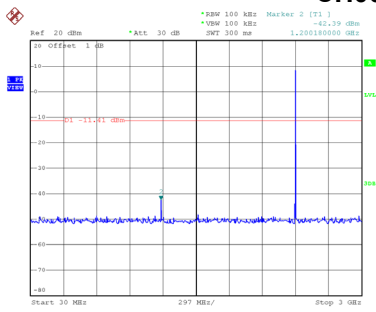

Date: 4.AUG.2020 10:15:56

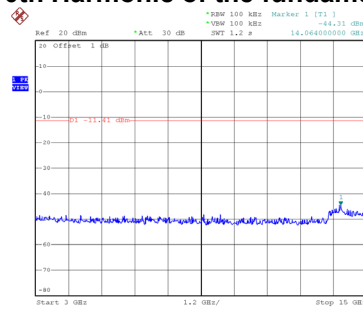


Date: 4.AUG.2020 10:16:04

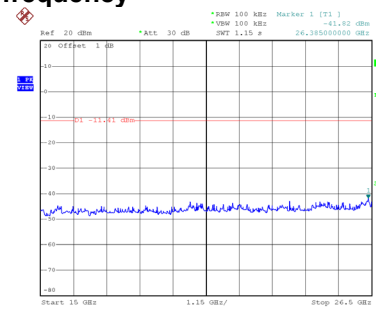


Date: 4.AUG.2020 10:16:13


## CH39 – 10th Harmonic of the fundamental frequency

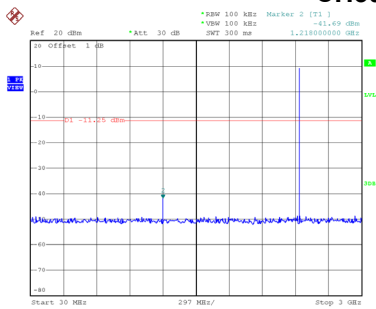

Date: 4.AUG.2020 10:17:03

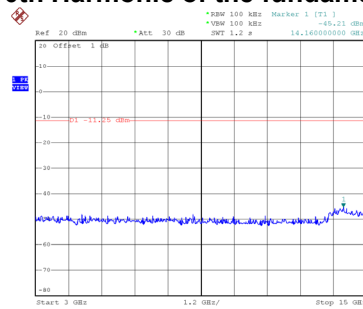


Date: 4.AUG.2020 10:17:12

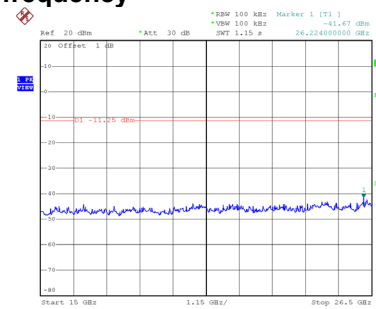


Date: 4.AUG.2020 10:17:20


## CH78 – 10th Harmonic of the fundamental frequency

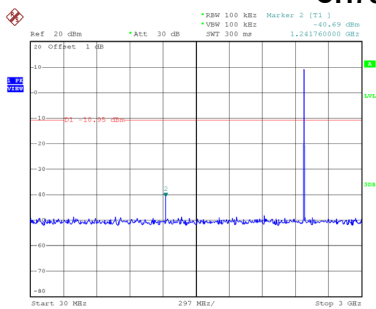

Date: 4.AUG.2020 10:23:18

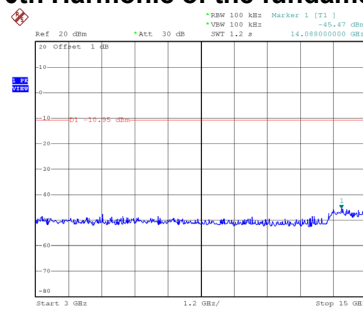


Date: 4.AUG.2020 10:23:26

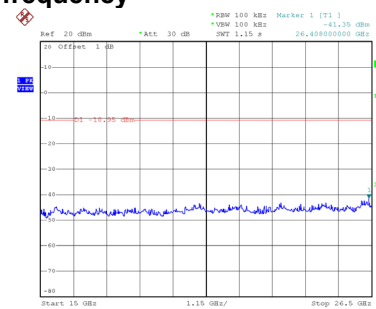

Date: 4.AUG.2020 10:23:35


## Test Mode : TX Mode \_3Mbps

### Bandedge CH00 (Lower)

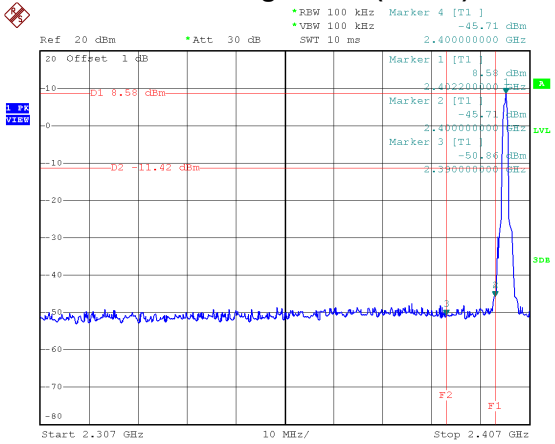


Date: 4.AUG.2020 14:03:00

### Bandedge CH78 (Upper)

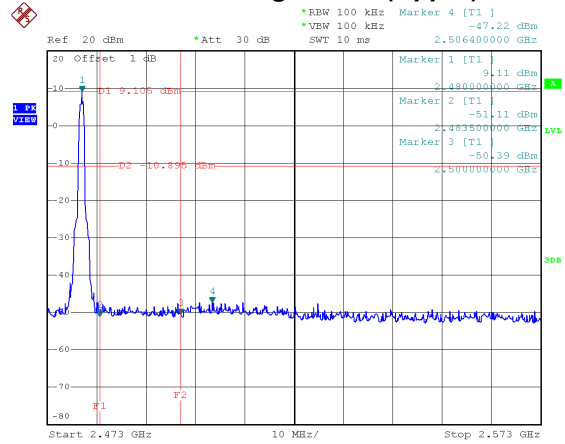


Date: 4.AUG.2020 14:06:27

### Hopping on mode (Lower)

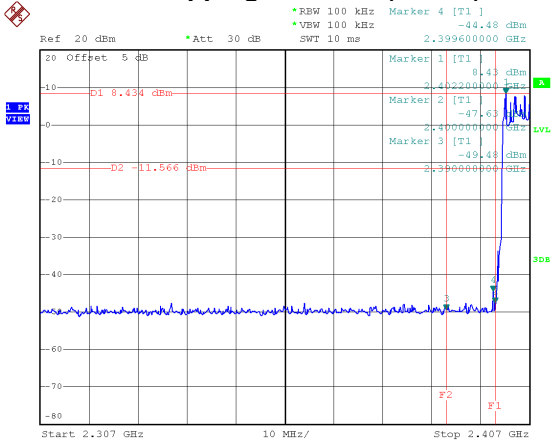


Date: 4.AUG.2020 13:48:33

### Hopping on mode (Upper)

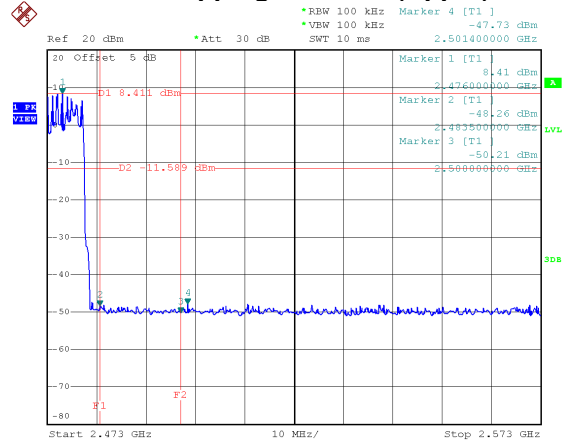


Date: 4.AUG.2020 13:54:28


### CH00 – 10th Harmonic of the fundamental frequency

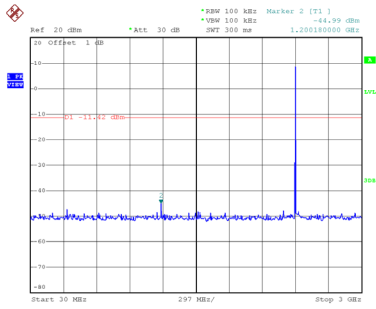

Date: 4.AUG.2020 14:03:47

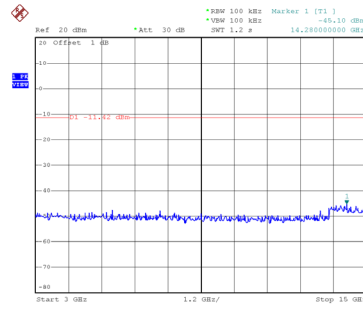


Date: 4.AUG.2020 14:03:56

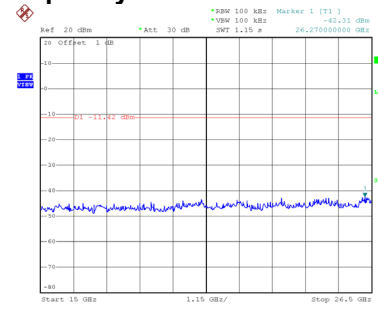


Date: 4.AUG.2020 14:04:04


### CH39 – 10th Harmonic of the fundamental frequency

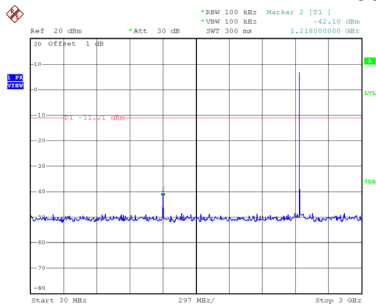

Date: 4.AUG.2020 14:04:42

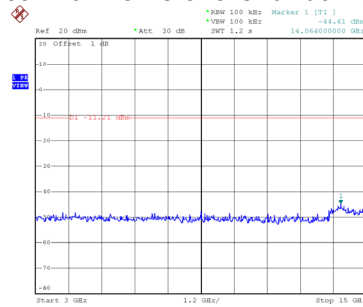


Date: 4.AUG.2020 14:04:51

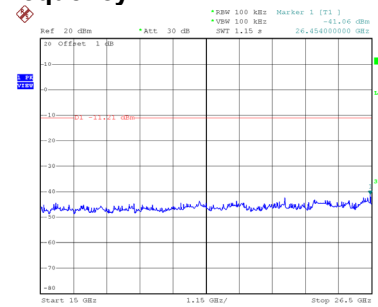


Date: 4.AUG.2020 14:04:59


### CH78 – 10th Harmonic of the fundamental frequency

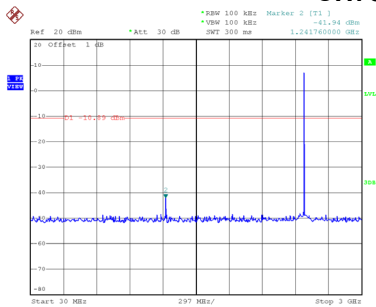

Date: 4.AUG.2020 14:07:17

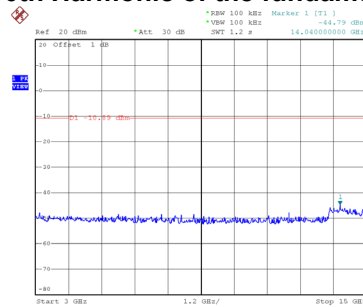

Date: 4.AUG.2020 14:07:25

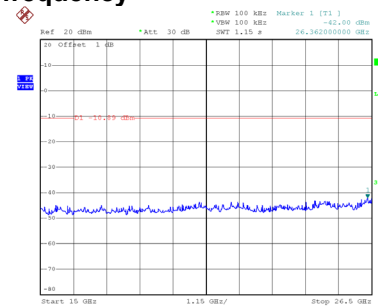

Date: 4.AUG.2020 14:07:34