

Test Laboratory: BTL Inc.

Date: 2024/6/12

**B08\_BT BLE\_CH19\_Rear Face\_0mm**

**DUT: Mouse;**


Communication System: UID 10670 - AAA, Bluetooth Low Energy;  
Frequency: 2440 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2440$  MHz;  $\sigma = 1.824$  S/m;  $\epsilon_r = 40.45$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature: 23.1 °C; Liquid Temperature: 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(7.46, 7.04, 6.83) @ 2440 MHz; Calibrated: 2023/12/18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2024/4/18
- Phantom: ELI v5.0\_Left; Type: QDOVA002AA; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Area Scan (12x11x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm  
Maximum value of SAR (measured) = 0.102 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
Reference Value = 1.440 V/m; Power Drift = -0.05 dB  
Peak SAR (extrapolated) = 0.164 W/kg  
**SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.039 W/kg**  
Maximum value of SAR (measured) = 0.121 W/kg

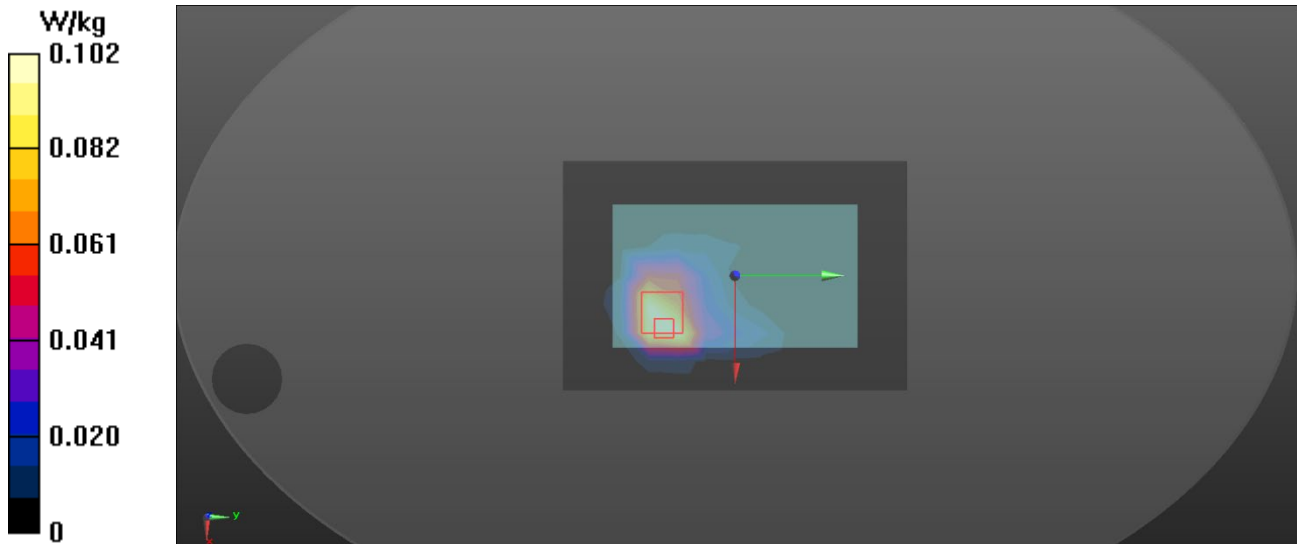

Test Laboratory: BTL Inc.

Date: 2024/6/12

## W08\_2.4G SRD\_CH39\_Rear Face\_0mm

**DUT: Mouse;**

Communication System: UID 0, SRD (0);

Frequency: 2441 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2441$  MHz;  $\sigma = 1.825$  S/m;  $\epsilon_r = 40.446$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.1 °C; Liquid Temperature: 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(7.46, 7.04, 6.83) @ 2441 MHz; Calibrated: 2023/12/18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2024/4/18
- Phantom: ELI v5.0\_Left; Type: QDOVA002AA; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Area Scan (12x11x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm  
Maximum value of SAR (measured) = 0.102 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
Reference Value = 1.307 V/m; Power Drift = 0 dB  
Peak SAR (extrapolated) = 0.156 W/kg  
**SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.038 W/kg**  
Maximum value of SAR (measured) = 0.111 W/kg

