

FCC Radio Test Report

FCC ID: RWO-RZ040224

This report concerns (check one): Original Grant Class I Change Class II Change

Project No. : 1706C193
Equipment : Wireless Gaming Headset
Test Model : RZ04-0224
Series Model : RZ04-0224XXXX-XXXX(X: Can be 0-1, A-Z)
Applicant : Razer Inc.
Address : 201 3rd Street, Suite 900, San Francisco, CA 94103

Date of Receipt : Jun. 21, 2017
Date of Test : Jun. 21, 2017 ~ Aug. 02, 2017
Issued Date : Aug. 03, 2017
Tested by : BTL Inc.

Testing Engineer : Vitas Zhou
(Vitas Zhou)

Technical Manager : David Mao
(David Mao)

Authorized Signatory : Steven Lu
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	10
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	11
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
3.5 DESCRIPTION OF SUPPORT UNITS	12
4 . EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 EUT TEST CONDITIONS	14
4.1.7 TEST RESULTS	14
4.2 RADIATED EMISSION MEASUREMENT	15
4.2.1 RADIATED EMISSION LIMITS	15
4.2.2 TEST PROCEDURE	16
4.2.3 DEVIATION FROM TEST STANDARD	16
4.2.4 TEST SETUP	17
4.2.5 EUT OPERATING CONDITIONS	18
4.2.6 EUT TEST CONDITIONS	18
4.2.7 TEST RESULTS (9KHZ TO 30MHZ)	18
4.2.8 TEST RESULTS (30MHZ TO 1000 MHZ)	18
4.2.9 TEST RESULTS (ABOVE 1000 MHZ)	18
5 . BANDWIDTH TEST	19
5.1 APPLIED PROCEDURES	19
5.1.1 TEST PROCEDURE	19
5.1.2 DEVIATION FROM STANDARD	19
5.1.3 TEST SETUP	19
5.1.4 EUT OPERATION CONDITIONS	19
5.1.5 EUT TEST CONDITIONS	19
5.1.6 TEST RESULTS	19
6 . MAXIMUM CONDUCTED OUTPUT POWER TEST	20

Table of Contents	Page
6.1 APPLIED PROCEDURES / LIMIT	20
6.1.1 TEST PROCEDURE	20
6.1.2 DEVIATION FROM STANDARD	20
6.1.3 TEST SETUP	20
6.1.4 EUT OPERATION CONDITIONS	20
6.1.5 EUT TEST CONDITIONS	20
6.1.6 TEST RESULTS	20
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	21
7.1 APPLIED PROCEDURES / LIMIT	21
7.1.1 TEST PROCEDURE	21
7.1.2 DEVIATION FROM STANDARD	21
7.1.3 TEST SETUP	21
7.1.4 EUT OPERATION CONDITIONS	21
7.1.5 EUT TEST CONDITIONS	21
7.1.6 TEST RESULTS	21
8 . POWER SPECTRAL DENSITY TEST	22
8.1 APPLIED PROCEDURES / LIMIT	22
8.1.1 TEST PROCEDURE	22
8.1.2 DEVIATION FROM STANDARD	22
8.1.3 TEST SETUP	22
8.1.4 EUT OPERATION CONDITIONS	22
8.1.5 EUT TEST CONDITIONS	22
8.1.6 TEST RESULTS	22
9 . MEASUREMENT INSTRUMENTS LIST	23
APPENDIX A - CONDUCTED EMISSION	25
APPENDIX B - RADIATED EMISSION (9KHZ TO 30MHZ)	28
APPENDIX C - RADIATED EMISSION (30MHZ TO 1000MHZ)	33
APPENDIX D - RADIATED EMISSION (ABOVE 1000MHZ)	40
APPENDIX E - BANDWIDTH	65
APPENDIX F – MAXIMUM CONDUCTED OUTPUT POWER	70
APPENDIX G - ANTENNA CONDUCTED SPURIOUS EMISSION	72
APPENDIX H - POWER SPECTRAL DENSITY	85

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-1-1706C193	Original Issue.	Aug. 03, 2017

1. CERTIFICATION

Equipment : Wireless Gaming Headset
Brand Name : RAZER
Test Model : RZ04-0224
Series Model : RZ04-0224XXXX-XXXX(X: Can be 0-1, A-Z)
Applicant : Razer Inc.
Manufacturer : Razer (Asia-Pacific) Pte.,Ltd.
Address : 514 Chai Chee Lane #07-01 ~ 06 Singapore 469029, Tel: +65 6505 2188
Factory : RAZER TECHNOLOGY AND DEVELOPMENT (SHENZHEN) CO., LTD
Address : East Wing, 3rd Floor, Block 2, Phase 1 of Vision Shenzhen Business Park Keji
South Road, Hi-Tech Industrial Park, Shenzhen 518057, China
Date of Test : Jun. 21, 2017 ~ Aug. 02, 2017
Test Sample : Engineering Sample
Standard(s) : FCC Part15, Subpart C:(15.247) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1706C193) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247) , Subpart C				
Standard(s)	Section	Test Item	Judgment	Remark
15.207		Conducted Emission	PASS	
15.247(d)		Antenna conducted Spurious Emission	PASS	
15.247(a)(2)		6dB Bandwidth	PASS	
15.247(b)(3)		Peak Output Power	PASS	
15.247(e)		Power Spectral Density	PASS	
15.203		Antenna Requirement	PASS	
15.247(d)/ 15.205/ 15.209		Transmitter Radiated Emissions	PASS	

Note:

(1) "N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.
 BTL's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{cispr} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 KHz ~ 30MHz	2.32

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9KHz~30MHz	V	3.79
		9KHz~30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06
		1GHz~18GHz	V	3.12
		1GHz~18GHz	H	3.68
		18GHz~40GHz	V	4.15
		18GHz~40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Wireless Gaming Headset		
Brand Name	RAZER		
Test Model	RZ04-0224		
Series Model	RZ04-0224XXXX-XXXX(X: Can be 0-1, A-Z)		
Model Difference	It is the same as the basic model and X is used to define which country it is for under the same family series.		
Power Source	#1 Supplied from USB port. #2 Supplied from battery.		
Power Rating	#1 DC 5V 500mA #2 DC 3.7V 1200mA		
Product Description	Operation Frequency	2412~2462 MHz	
	Modulation Technology	802.11g:OFDM 802.11n:OFDM	
	Bit Rate of Transmitter	802.11g: 54/48/36/24/18/12/9/6 Mbps 802.11n up to 150 Mbps	
	Average Output Power (Max.)	802.11g: -5.77dBm 802.11n(20MHz): -6.21dBm	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

CH01 – CH11 for 802.11g, 802.11n(20MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Table for Filed Antenna

Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Chip	N/A	2.64

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX G MODE CHANNEL 01/06/11
Mode 2	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 3	TX Mode

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 5	TX Mode

For Radiated Test	
Final Test Mode	Description
Mode 1	TX G MODE CHANNEL 01/06/11
Mode 2	TX N-20MHZ MODE CHANNEL 01/06/11

For Band Edge Test	
Final Test Mode	Description
Mode 1	TX G MODE CHANNEL 01/06/11
Mode 2	TX N-20MHZ MODE CHANNEL 01/06/11

6dB Spectrum Bandwidth	
Final Test Mode	Description
Mode 1	TX G MODE CHANNEL 01/06/11
Mode 2	TX N-20MHZ MODE CHANNEL 01/06/11

Maximum Conducted Output Power	
Final Test Mode	Description
Mode 1	TX G MODE CHANNEL 01/06/11
Mode 2	TX N-20MHZ MODE CHANNEL 01/06/11

Power Spectral Density	
Final Test Mode	Description
Mode 1	TX G MODE CHANNEL 01/06/11
Mode 2	TX N-20MHZ MODE CHANNEL 01/06/11

Note:


- (1) The measurements are performed at the high, middle, low available channels.
- (2)
 - 802.11g mode: OFDM (6Mbps)
 - 802.11n HT20 mode : BPSK (6.5Mbps)
 - For radiated emission tests, the highest output powers were set for final test.
- (3) For radiated below 1G test, the 802.11b is found to be the worst case and recorded.
- (4) The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN

Test software version	artgui		
Frequency (MHz)	2412	2437	2462
802.11g	61	61	62
802.11n (20MHz)	60	61	62

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

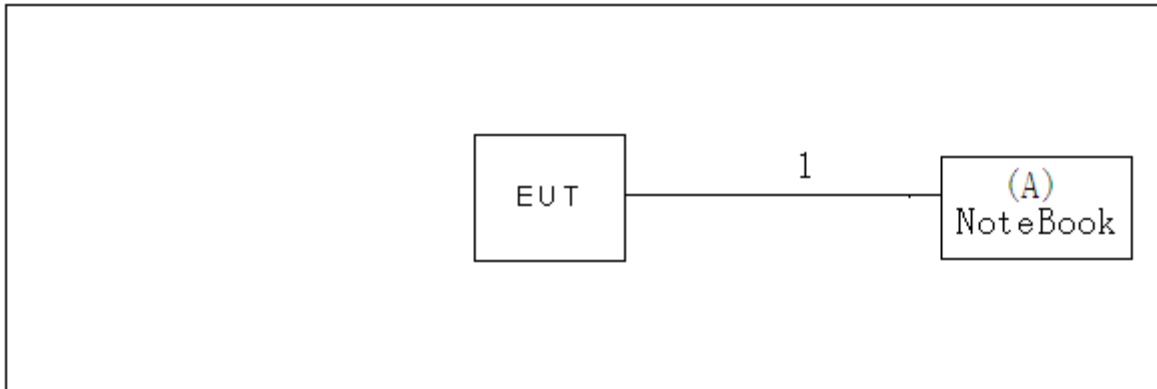

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	Notebook	Lenovo	INSPIRON 1420	DOC	JX193A01SDC2

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.5m	USB Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150KHz-30MHz)

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-peak	Average
0.15 -0.50	66 to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	60	50

Note:

- (1) The limit of " * " decreases with the logarithm of the frequency
- (2) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

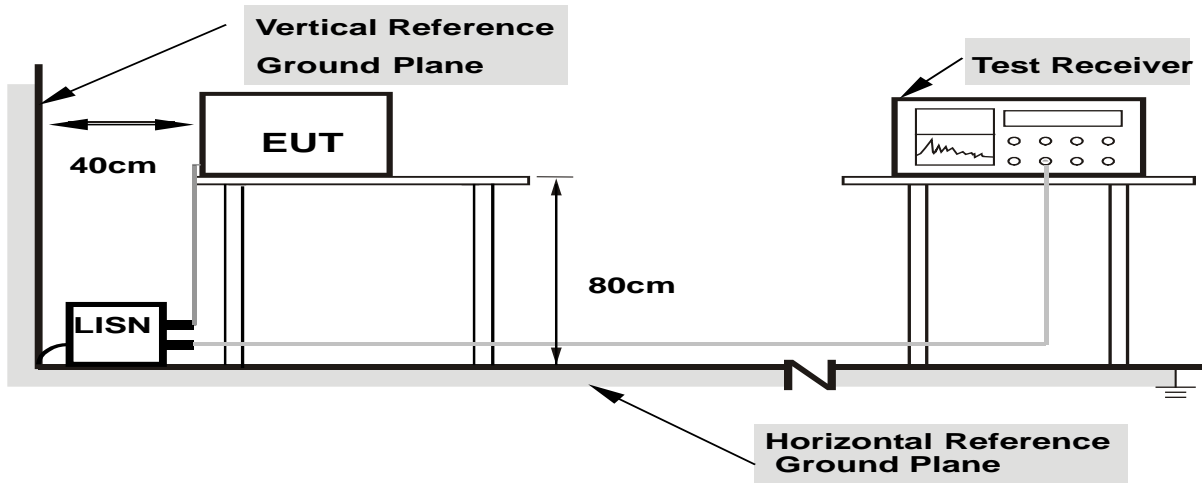

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was placed on the test table and programmed in normal function.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Appendix A.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9KHz-1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

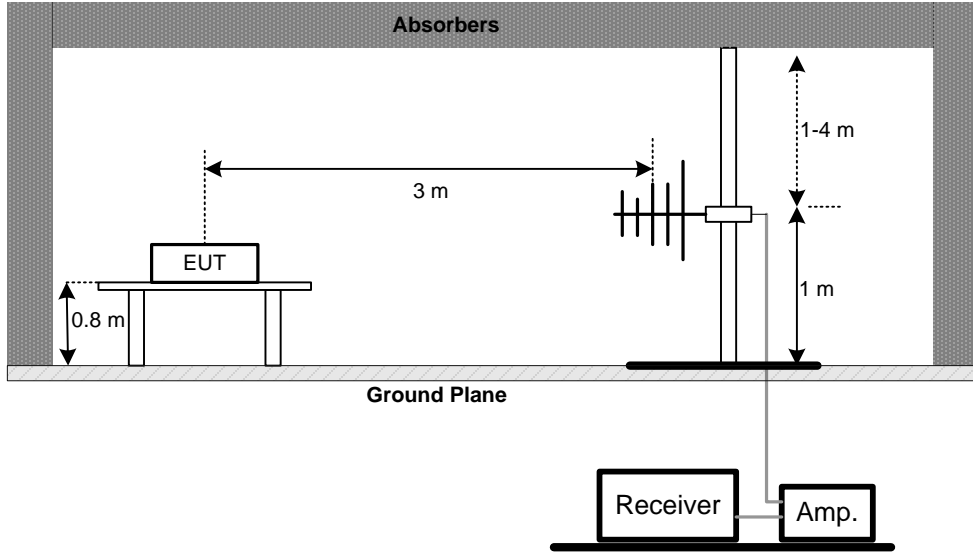

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

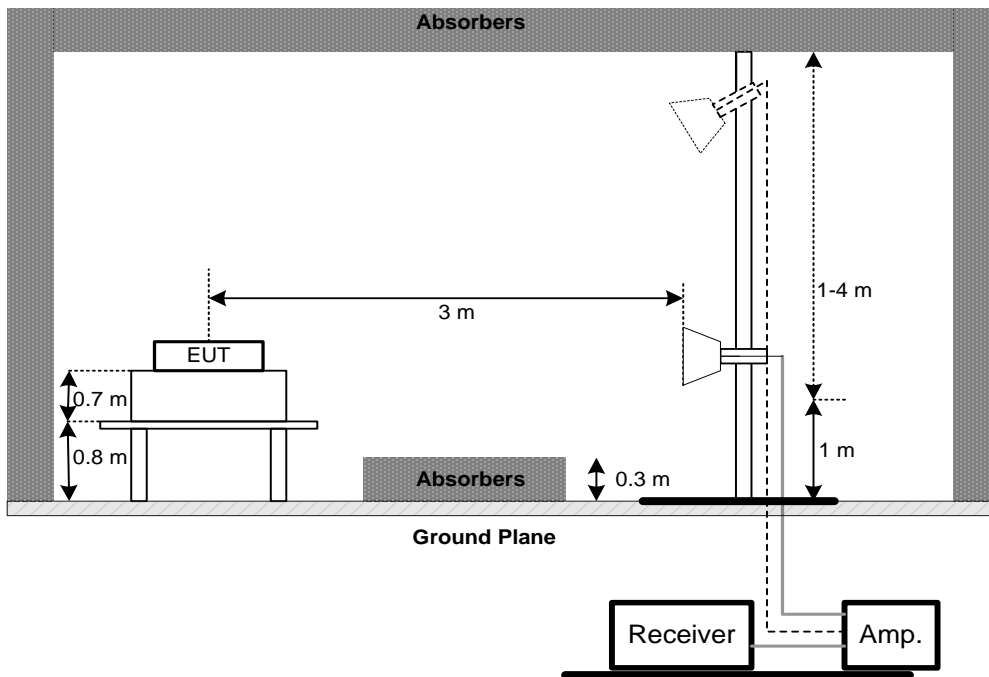

(C) For Radiated Emissions Below 30MHz

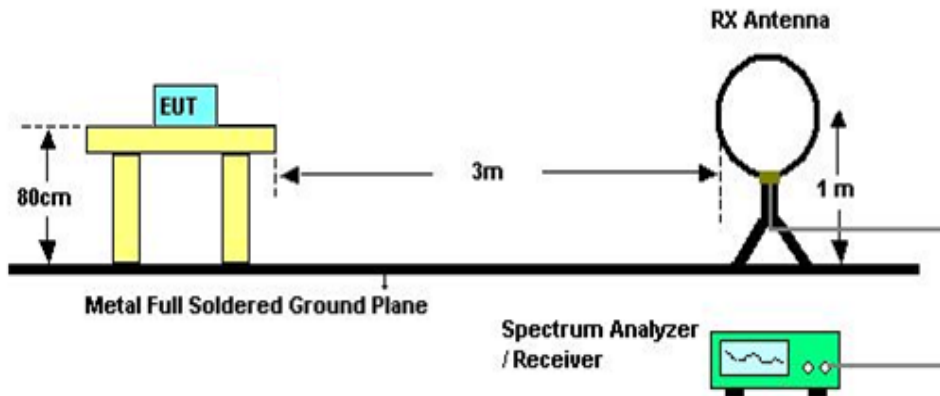

4.2.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Appendix B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (30MHZ TO 1000 MHZ)

Please refer to the Appendix C.

4.2.9 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Appendix D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable. For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	2400-2483.5	PASS


5.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP

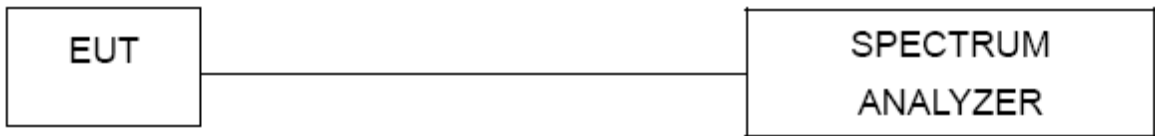

5.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

5.1.6 TEST RESULTS

Please refer to the Appendix E.

6. MAXIMUM CONDUCTED OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Output Power	1 Watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- b. The maximum conducted output power was performed in accordance with method 9.1.2 of FCC KDB 558074 D01 DTS Meas Guidance.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

6.1.6 TEST RESULTS

Please refer to the Appendix F.

7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.


7.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = Auto.
- c. Offset=antenna gain+cable loss

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP

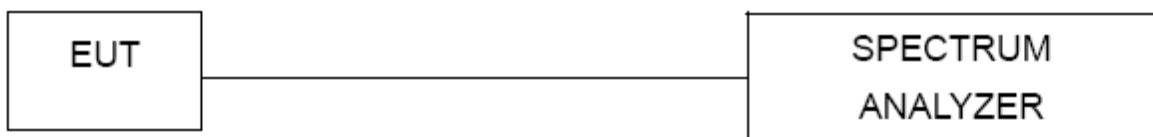

7.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

7.1.6 TEST RESULTS

Please refer to the Appendix G.

8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


8.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW=3KHz, VBW=10KHz, Sweep time = Auto.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP

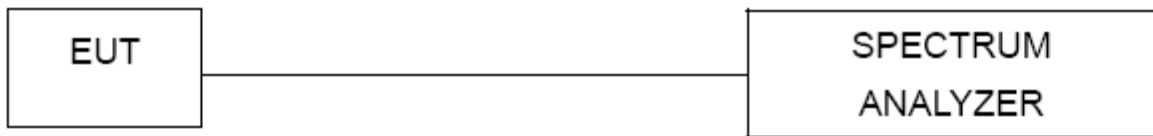

8.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

8.1.6 TEST RESULTS

Please refer to the Appendix H.

9. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100382	Mar. 26, 2018
2	LISN	EMCO	3816/2	52765	Mar. 26, 2018
3	50Ω Terminator	SHX	TF2-3G-A	8122901	Mar. 26, 2018
4	TWO-LINE V-NETWORK	R&S	ENV216	101447	Mar. 26, 2018
5	Cable	emci	RG223(9KHz-30MHz)(5m)	N/A	Mar. 07, 2018
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 26, 2018
2	Amplifier	HP	8447D	2944A09673	Oct. 20, 2017
3	Receiver	AGILENT	N9038A	MY52130039	Sep. 04, 2017
4	Cable	emci	LMR-400(30MHz-1GHz)(8m+5m)	N/A	Jun. 26, 2018
5	Control	CT	SC100	N/A	N/A
6	Position Control	MF	MF-7802	MF780208416	N/A
7	Antenna	ETS	3115	00075789	Mar. 26, 2018
8	Amplifier	Agilent	8449B	3008A02274	Feb. 22, 2018
9	Receiver	AGILENT	N9038A	MY52130039	Sep. 04, 2017
10	Test Cable	emci	EMC104-SM-SM-10000(1GHz-26.5GHz)	C-68	Jun. 26, 2018
11	Controller	CT	SC100	N/A	N/A
12	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Apr. 22, 2018
13	Microwave Pre-amplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 26, 2018
14	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Sep. 06, 2017
15	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

6dB Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Sep. 04, 2017

Peak Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	P-series Power meter	Agilent	N1911A	MY45100473	Mar. 26, 2018
2	Wireband Power sensor	Agilent	N1921A	MY51100041	Mar. 26, 2018

Antenna Conducted Spurious Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Sep. 04, 2017


Power Spectral Density Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Sep. 04, 2017

Remark: "N/A" denotes no model name, serial no. or calibration specified.
 All calibration period of equipment list is one year.

APPENDIX A - CONDUCTED EMISSION

Test Mode : TX Mode


Line

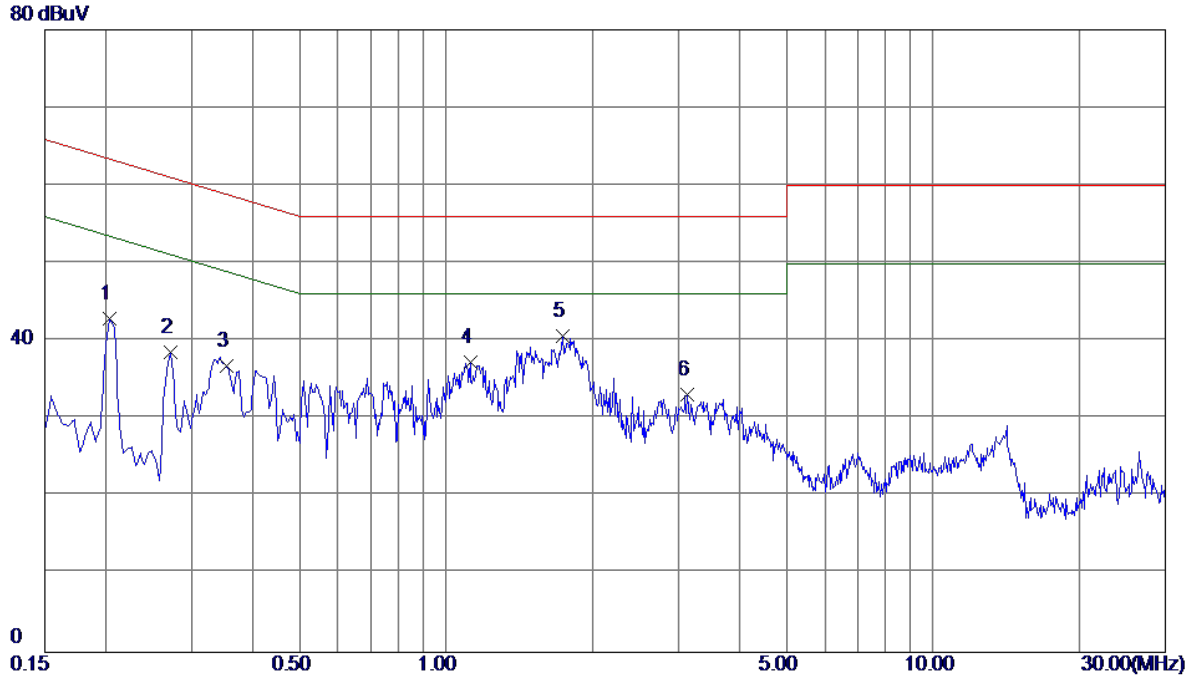

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.2040	33.15	9.76	42.91	63.45	-20.54	Peak	
2	0.2714	28.80	9.76	38.56	61.07	-22.51	Peak	
3	0.3539	27.04	9.79	36.83	58.87	-22.04	Peak	
4	1.1220	27.42	9.86	37.28	56.00	-18.72	Peak	
5 *	1.7385	30.78	9.91	40.69	56.00	-15.31	Peak	
6	3.1335	23.06	10.00	33.06	56.00	-22.94	Peak	

Test Mode : TX Mode

Neutral

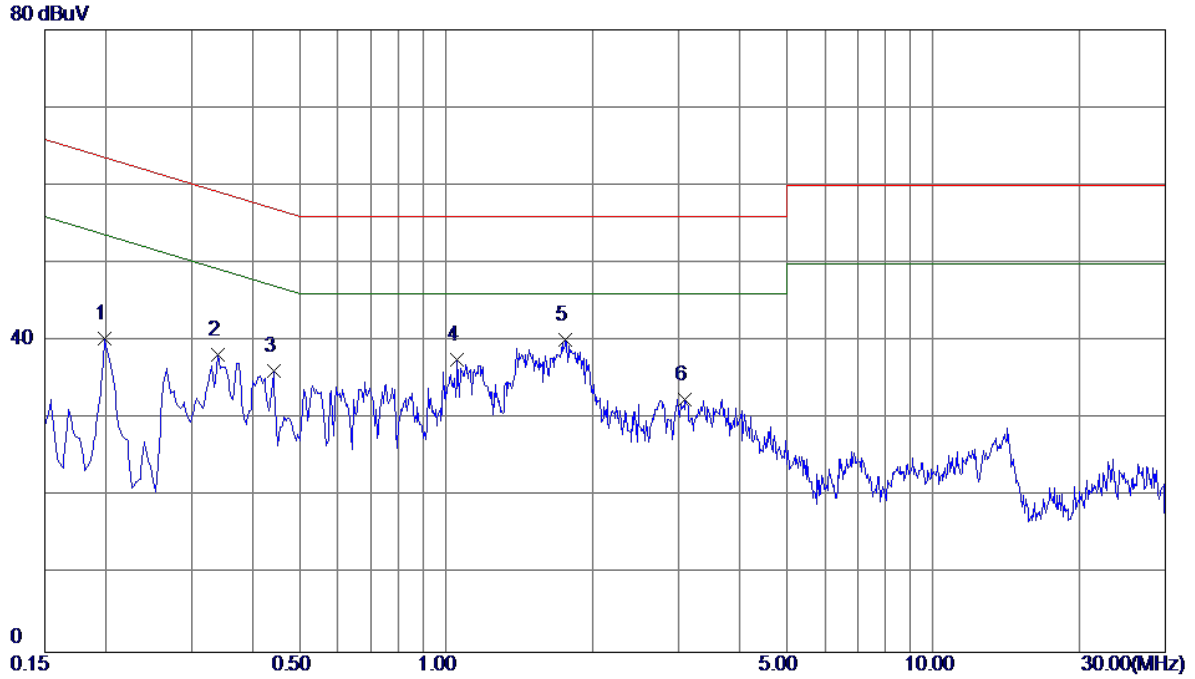


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1995	30.62	9.69	40.31	63.63	-23.32	Peak	
2	0.3390	28.57	9.69	38.26	59.23	-20.97	Peak	
3	0.4425	26.48	9.69	36.17	57.01	-20.84	Peak	
4	1.0544	27.82	9.75	37.57	56.00	-18.43	Peak	
5 *	1.7610	30.40	9.82	40.22	56.00	-15.78	Peak	
6	3.0975	22.64	9.90	32.54	56.00	-23.46	Peak	

APPENDIX B - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode: TX B MODE CHANNEL 01

Ant 0°

160 dBuV/m

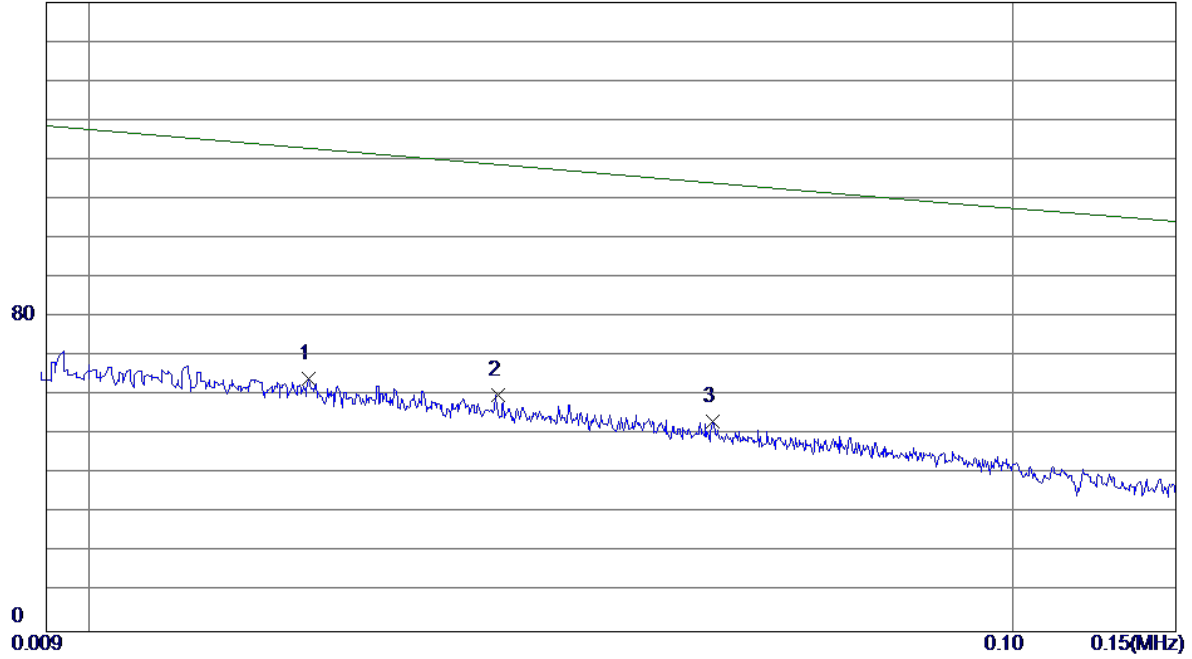


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	0.0173	44.35	19.97	64.32	126.45	-62.13	AVG	
2	0.0277	40.69	19.39	60.08	123.88	-63.80	AVG	
3	0.0473	34.58	18.81	53.39	119.04	-65.65	AVG	

Test Mode: TX B MODE CHANNEL 01

Ant 0°

160 dBuV/m

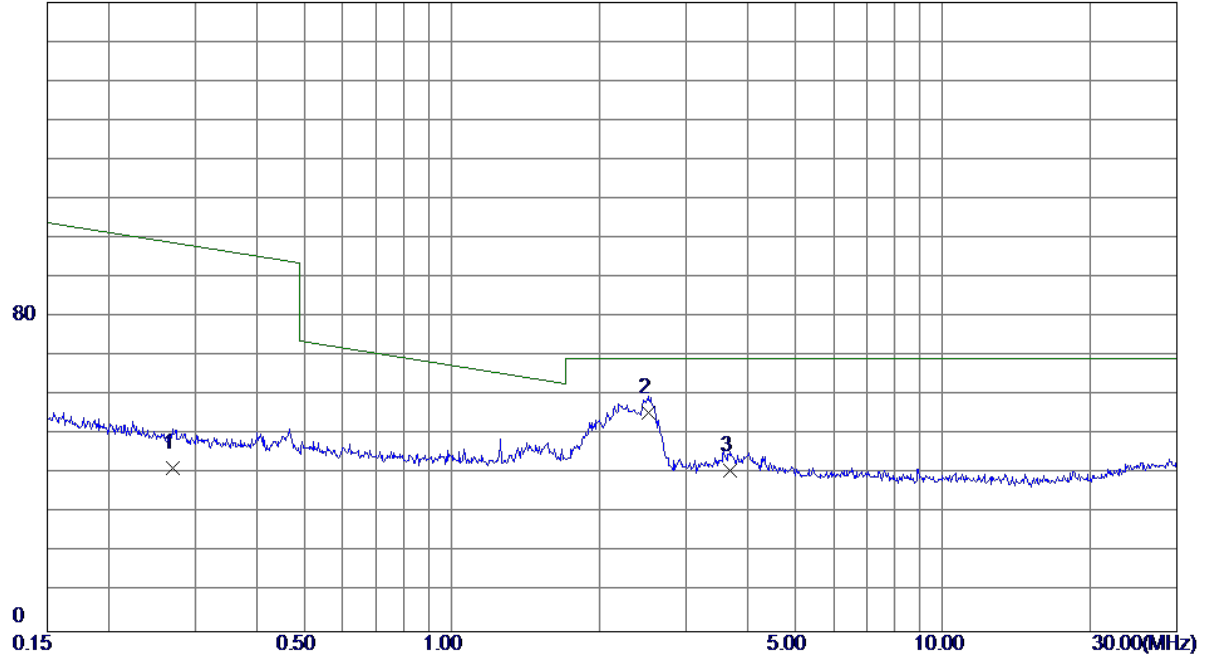


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.2700	24.89	16.64	41.53	101.31	-59.78	AVG	
2 *	2.5132	40.32	15.37	55.69	69.54	-13.85	QP	
3	3.6806	25.77	15.04	40.81	69.54	-28.73	QP	

Test Mode: TX B MODE CHANNEL 01

Ant 90°

160 dBuV/m

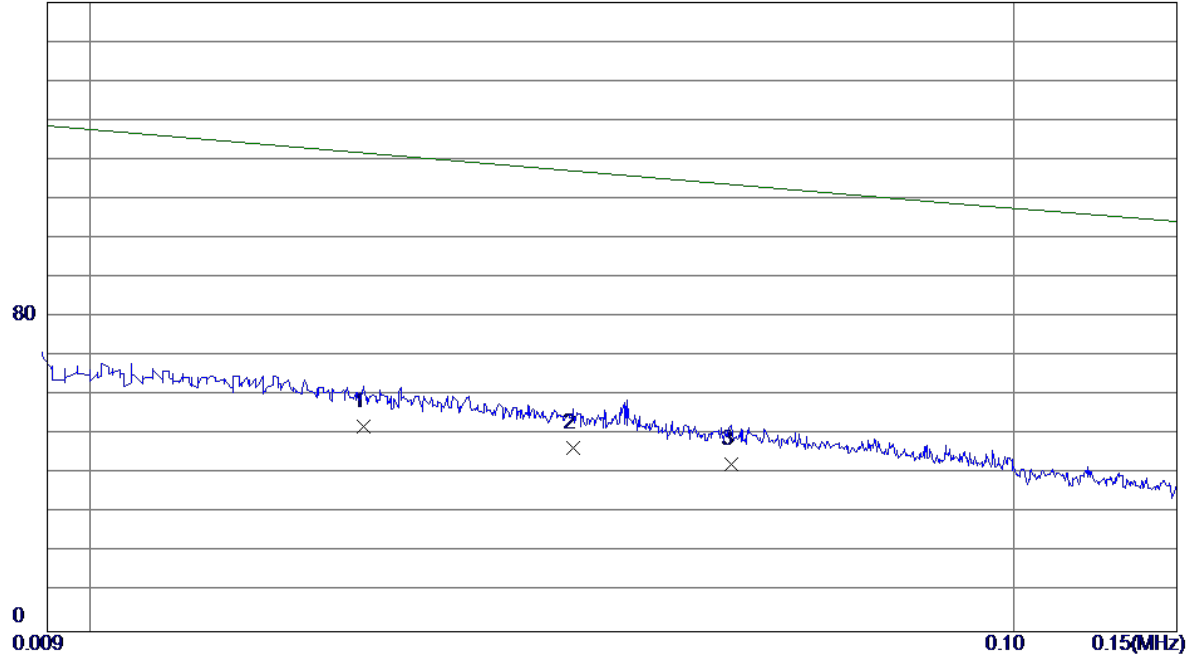


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	0.0198	32.63	19.65	52.28	125.83	-73.55	AVG	
2	0.0334	27.43	19.22	46.65	122.47	-75.82	AVG	
3	0.0495	23.78	18.74	42.52	118.50	-75.98	AVG	

Test Mode: TX B MODE CHANNEL 01

Ant 90°

160 dBuV/m

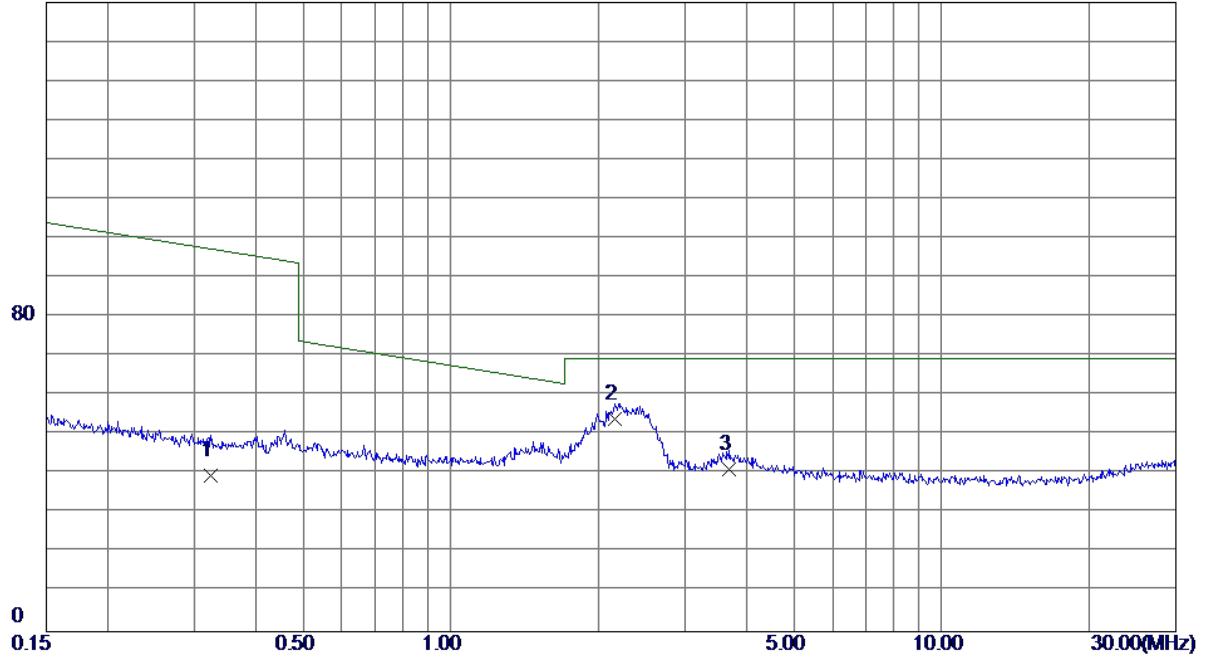


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.3251	23.22	16.60	39.82	99.43	-59.61	AVG	
2 *	2.1552	38.60	15.47	54.07	69.54	-15.47	QP	
3	3.6806	26.11	15.04	41.15	69.54	-28.39	QP	

APPENDIX C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode: TX B MODE CHANNEL 01

Vertical

80 dBuV/m

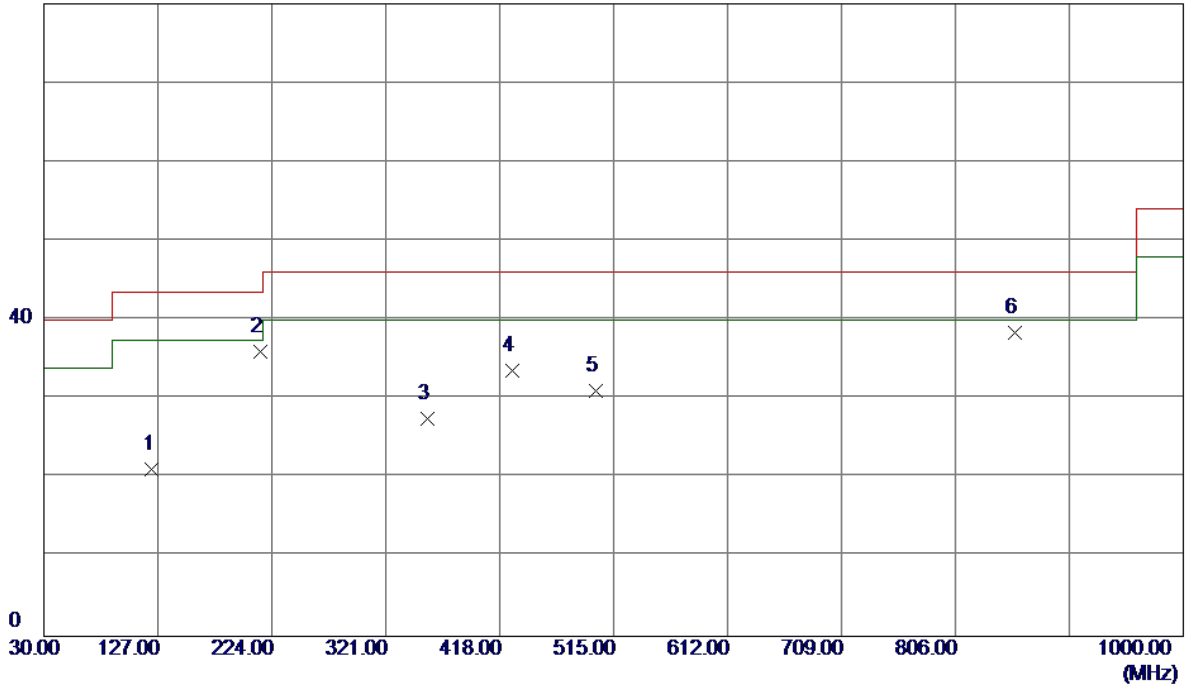


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	122.1500	36.37	-15.25	21.12	43.50	-22.38	Peak	
2 *	214.3000	49.95	-13.95	36.00	43.50	-7.50	Peak	
3	356.8900	39.42	-11.87	27.55	46.00	-18.45	Peak	
4	428.6700	44.10	-10.55	33.55	46.00	-12.45	Peak	
5	499.4800	39.82	-8.73	31.09	46.00	-14.91	Peak	
6	856.4400	38.26	0.13	38.39	46.00	-7.61	Peak	

Test Mode: TX B MODE CHANNEL 01

Horizontal


80 dBuV/m

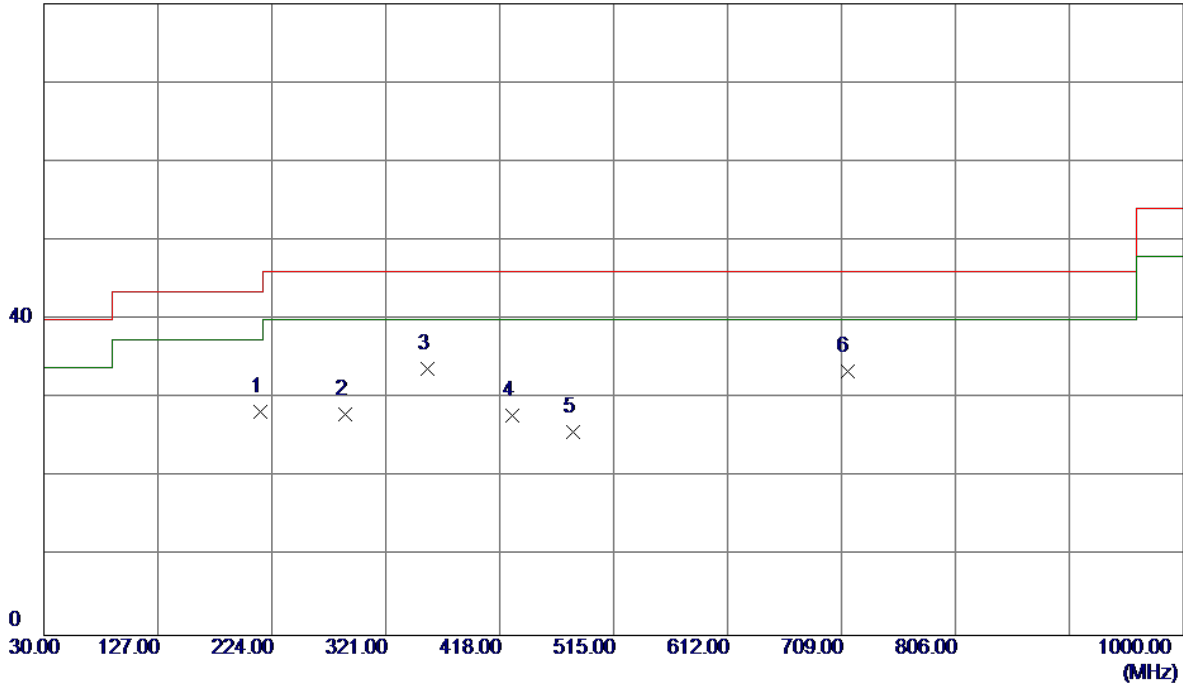

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	214.3000	42.21	-13.95	28.26	43.50	-15.24	Peak	
2	286.0799	42.36	-14.42	27.94	46.00	-18.06	Peak	
3 *	356.8900	45.63	-11.87	33.76	46.00	-12.24	Peak	
4	428.6700	38.39	-10.55	27.84	46.00	-18.16	Peak	
5	480.0800	34.92	-9.21	25.71	46.00	-20.29	Peak	
6	713.8500	36.92	-3.53	33.39	46.00	-12.61	Peak	

Test Mode: TX B MODE CHANNEL 06

Vertical

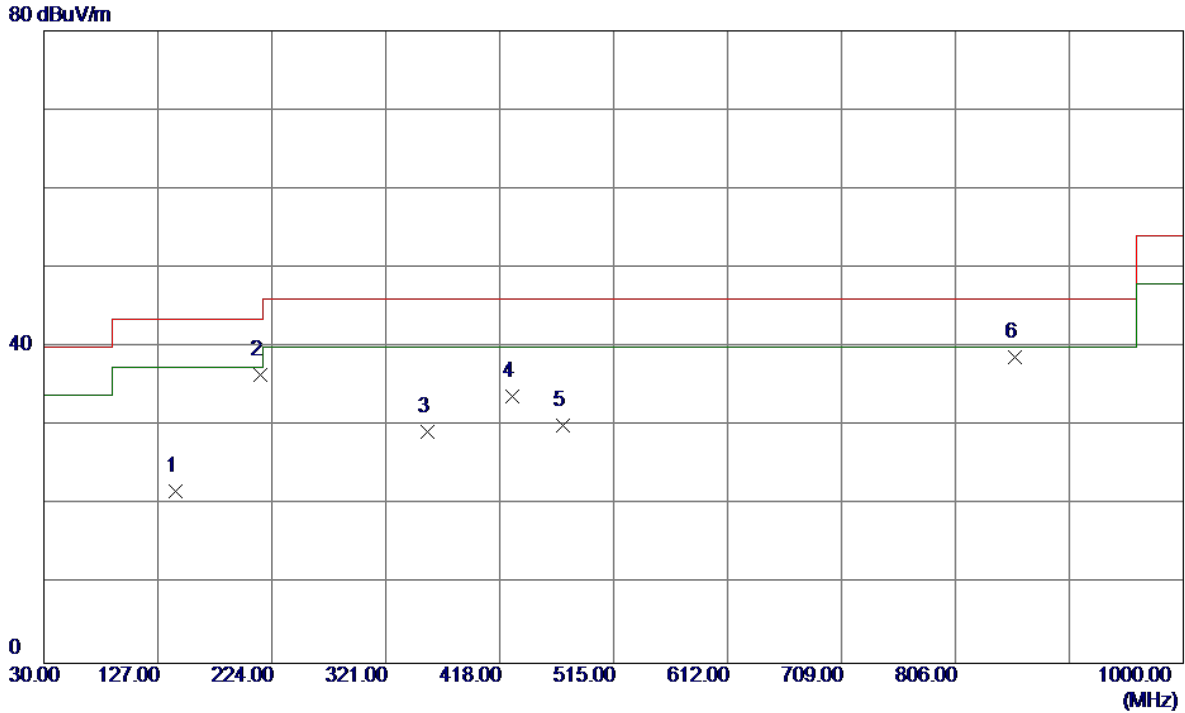


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	142.5200	35.76	-14.04	21.72	43.50	-21.78	Peak	
2 *	214.3000	50.45	-13.95	36.50	43.50	-7.00	Peak	
3	356.8900	41.17	-11.87	29.30	46.00	-16.70	Peak	
4	428.6700	44.33	-10.55	33.78	46.00	-12.22	Peak	
5	471.3500	39.45	-9.42	30.03	46.00	-15.97	Peak	
6	856.4400	38.60	0.13	38.73	46.00	-7.27	Peak	

Test Mode: TX B MODE CHANNEL 06

Horizontal

80 dBuV/m

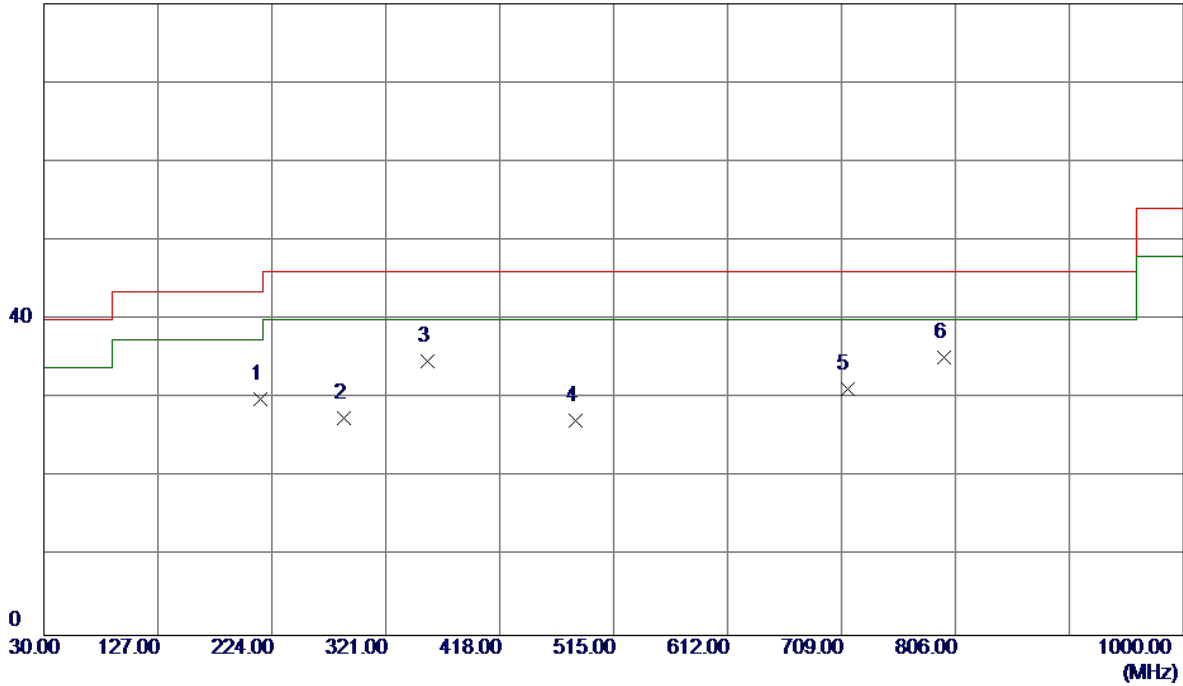


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	214.3000	43.88	-13.95	29.93	43.50	-13.57	Peak	
2	285.1099	41.95	-14.48	27.47	46.00	-18.53	Peak	
3	356.8900	46.54	-11.87	34.67	46.00	-11.33	Peak	
4	482.9900	36.37	-9.14	27.23	46.00	-18.77	Peak	
5	713.8500	34.72	-3.53	31.19	46.00	-14.81	Peak	
6 *	796.3000	36.59	-1.44	35.15	46.00	-10.85	Peak	

Test Mode: TX B MODE CHANNEL 11

Vertical


80 dBuV/m

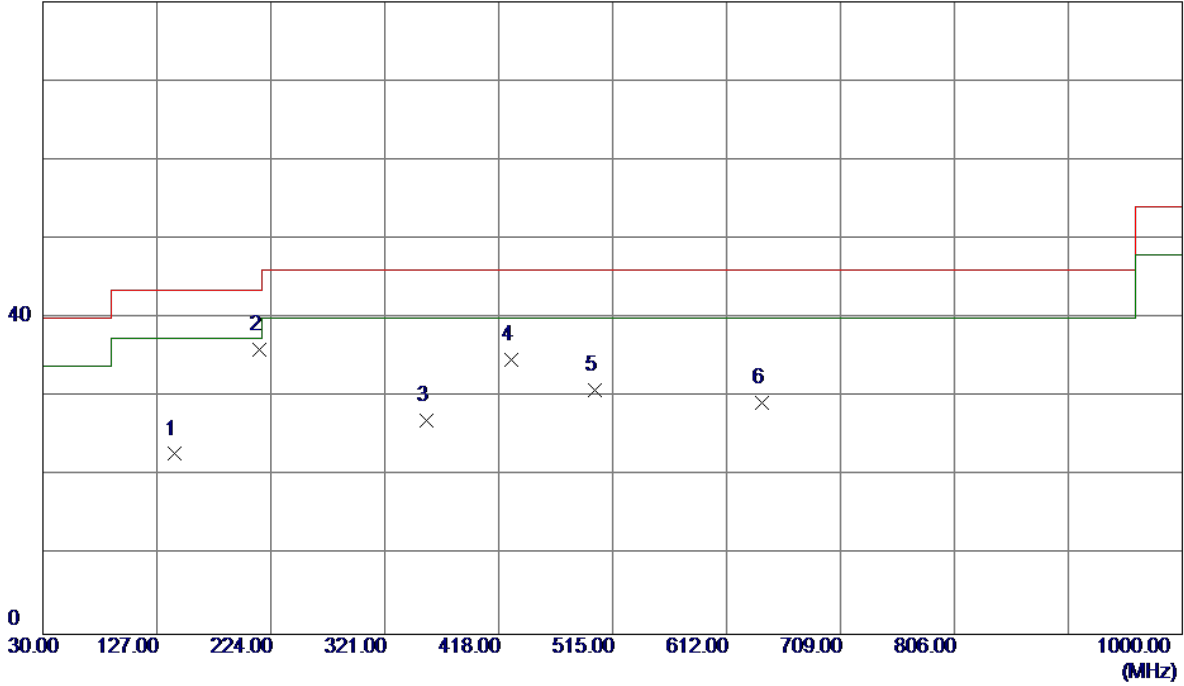

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	142.5200	36.84	-14.04	22.80	43.50	-20.70	Peak	
2 *	214.3000	49.93	-13.95	35.98	43.50	-7.52	Peak	
3	356.8900	38.87	-11.87	27.00	46.00	-19.00	Peak	
4	428.6700	45.29	-10.55	34.74	46.00	-11.26	Peak	
5	499.4800	39.64	-8.73	30.91	46.00	-15.09	Peak	
6	642.0700	34.97	-5.62	29.35	46.00	-16.65	Peak	

Test Mode: TX B MODE CHANNEL 11

Horizontal

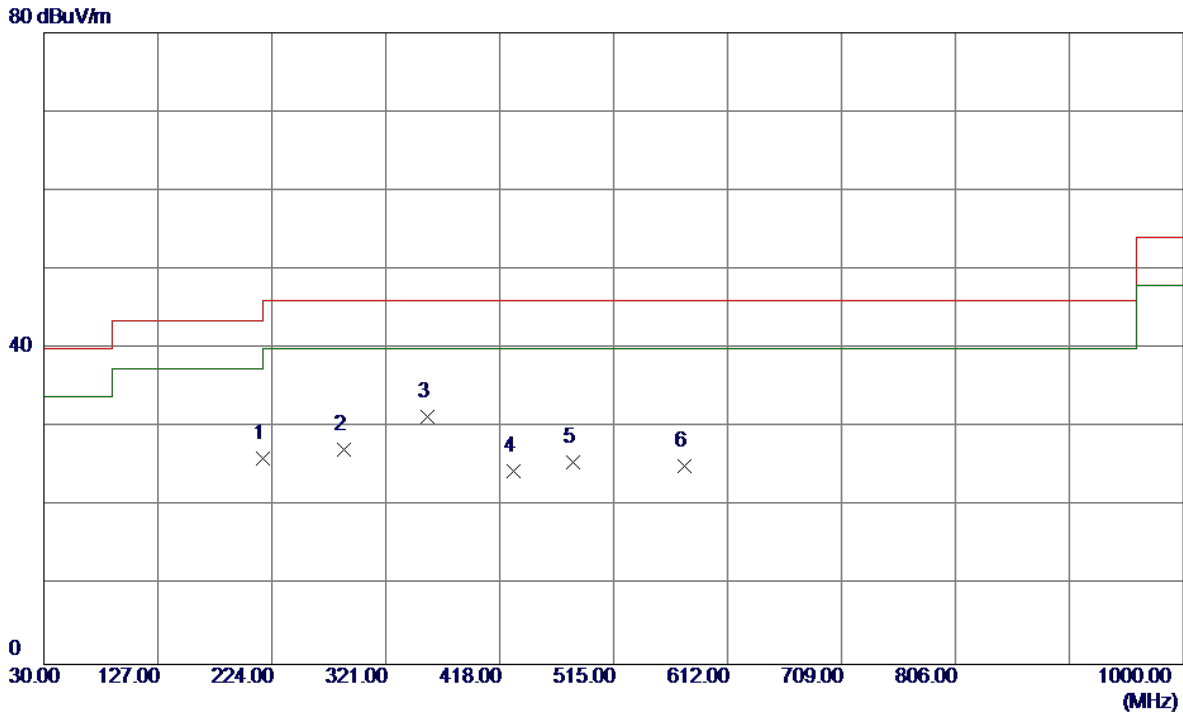


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	216.2400	39.96	-13.93	26.03	46.00	-19.97	Peak	
2	285.1099	41.70	-14.48	27.22	46.00	-18.78	Peak	
3 *	356.8900	43.16	-11.87	31.29	46.00	-14.71	Peak	
4	429.6400	34.93	-10.52	24.41	46.00	-21.59	Peak	
5	480.0800	34.79	-9.21	25.58	46.00	-20.42	Peak	
6	575.1400	32.14	-7.06	25.08	46.00	-20.92	Peak	

APPENDIX D - RADIATED EMISSION (ABOVE 1000MHZ)

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz


Vertical

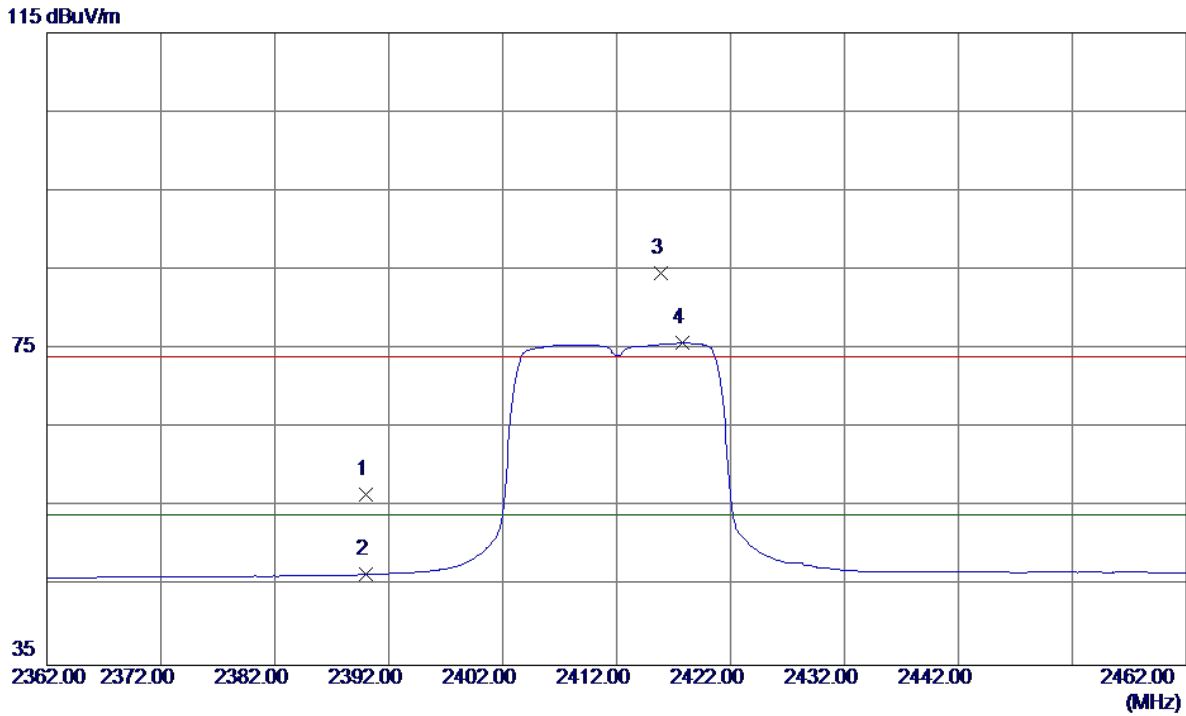

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	23.51	33.06	56.57	74.00	-17.43	Peak	
2	2390.0000	13.43	33.06	46.49	54.00	-7.51	AVG	
3	2415.9000	51.48	33.15	84.63	74.00	10.63	Peak	No Limit
4 *	2417.8000	42.59	33.16	75.75	54.00	21.75	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz

Vertical

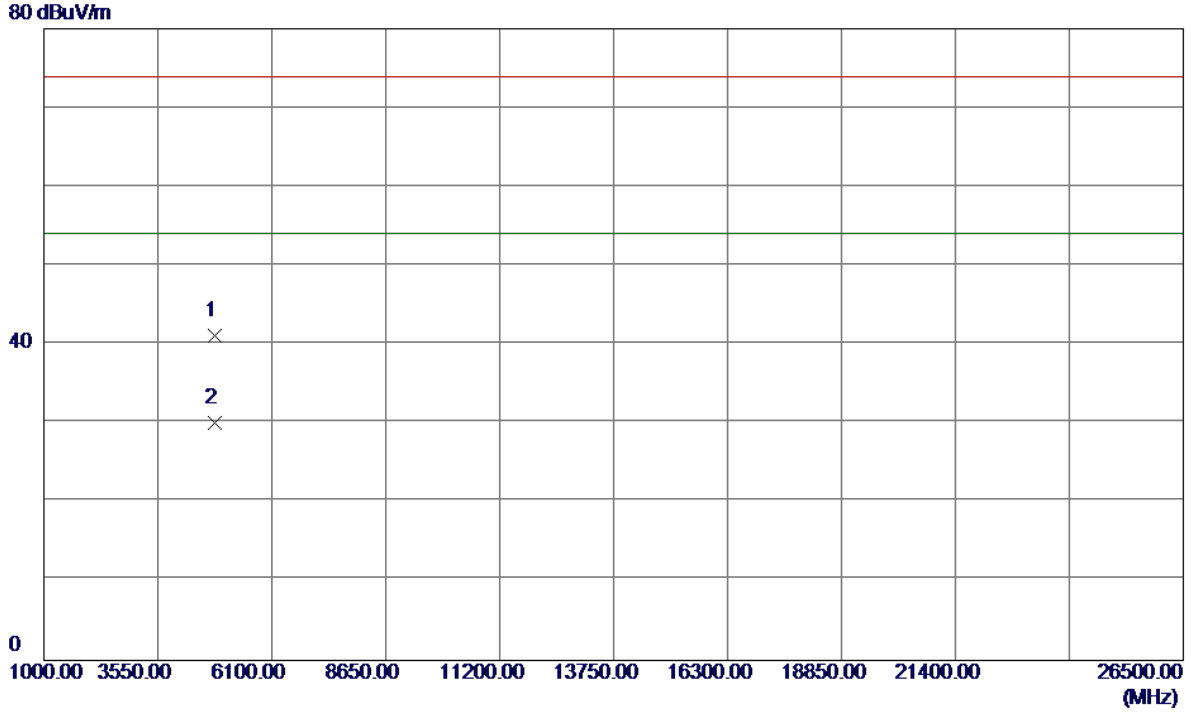


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4823.3460	34.82	6.31	41.13	74.00	-32.87	Peak	
2 *	4824.9160	23.82	6.32	30.14	54.00	-23.86	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz

Horizontal


115 dBuV/m

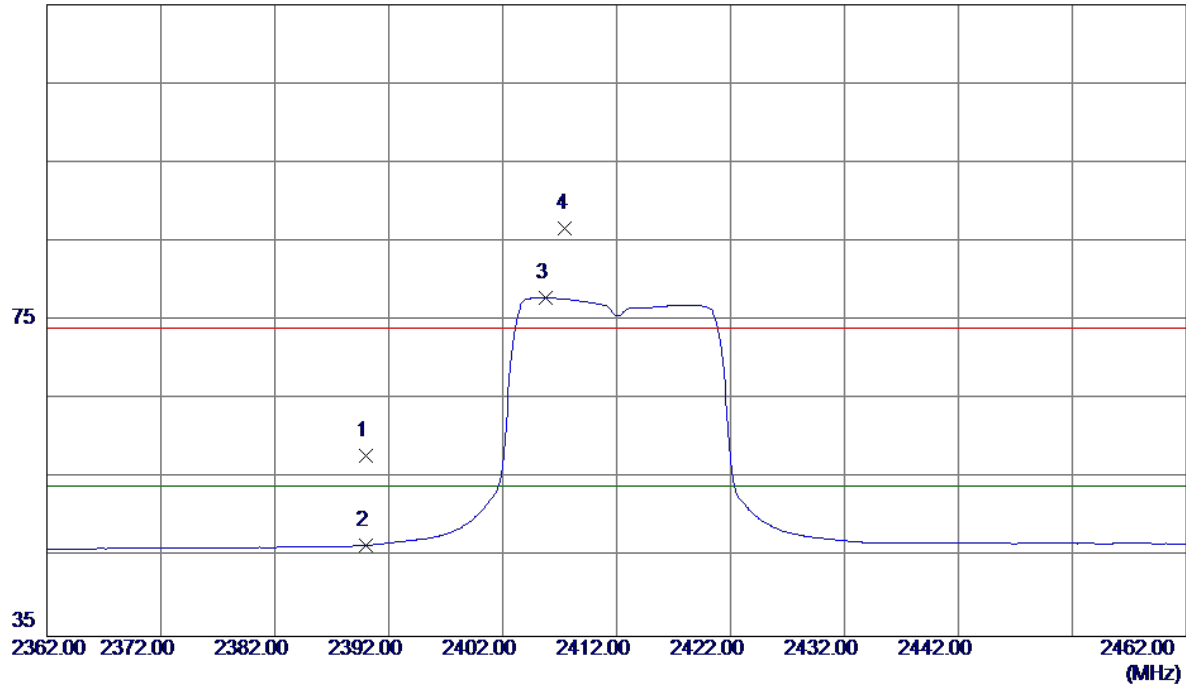

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	24.76	33.06	57.82	74.00	-16.18	Peak	
2	2390.0000	13.46	33.06	46.52	54.00	-7.48	AVG	
3 *	2405.8000	44.74	33.12	77.86	54.00	23.86	AVG	No Limit
4	2407.5000	53.52	33.12	86.64	74.00	12.64	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz

Horizontal

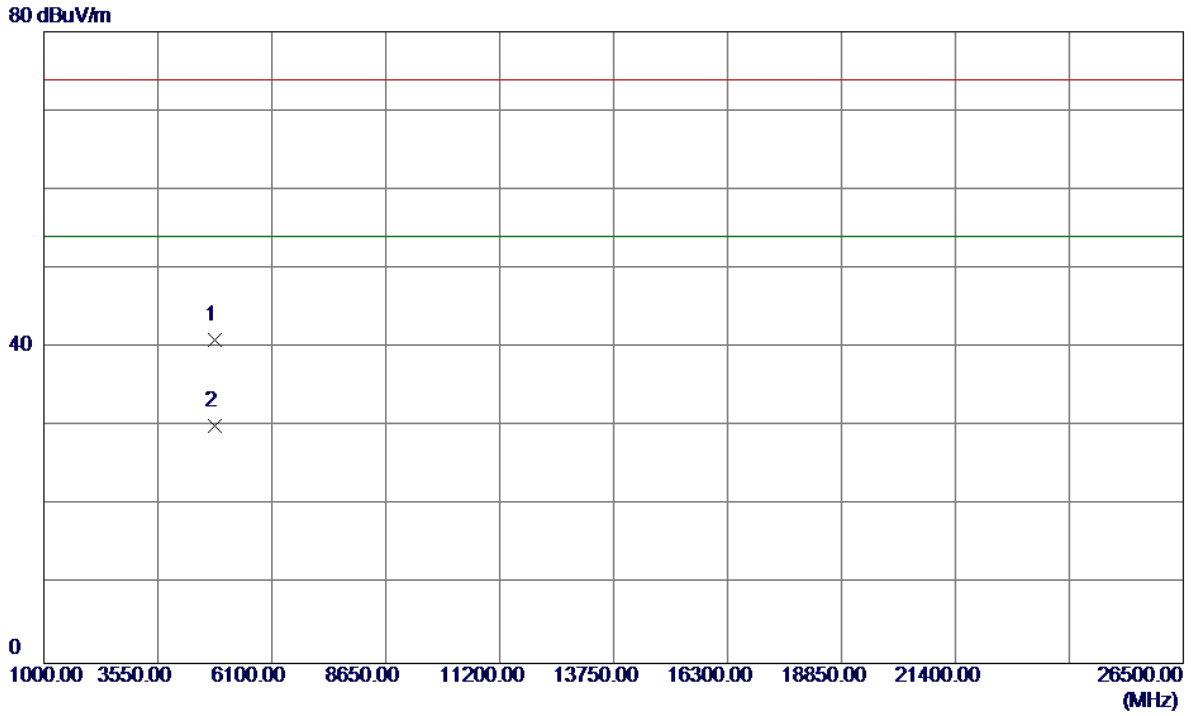


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4823.5179	34.71	6.32	41.03	74.00	-32.97	Peak	
2 *	4824.0520	23.71	6.32	30.03	54.00	-23.97	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz

Vertical


115 dBuV/m

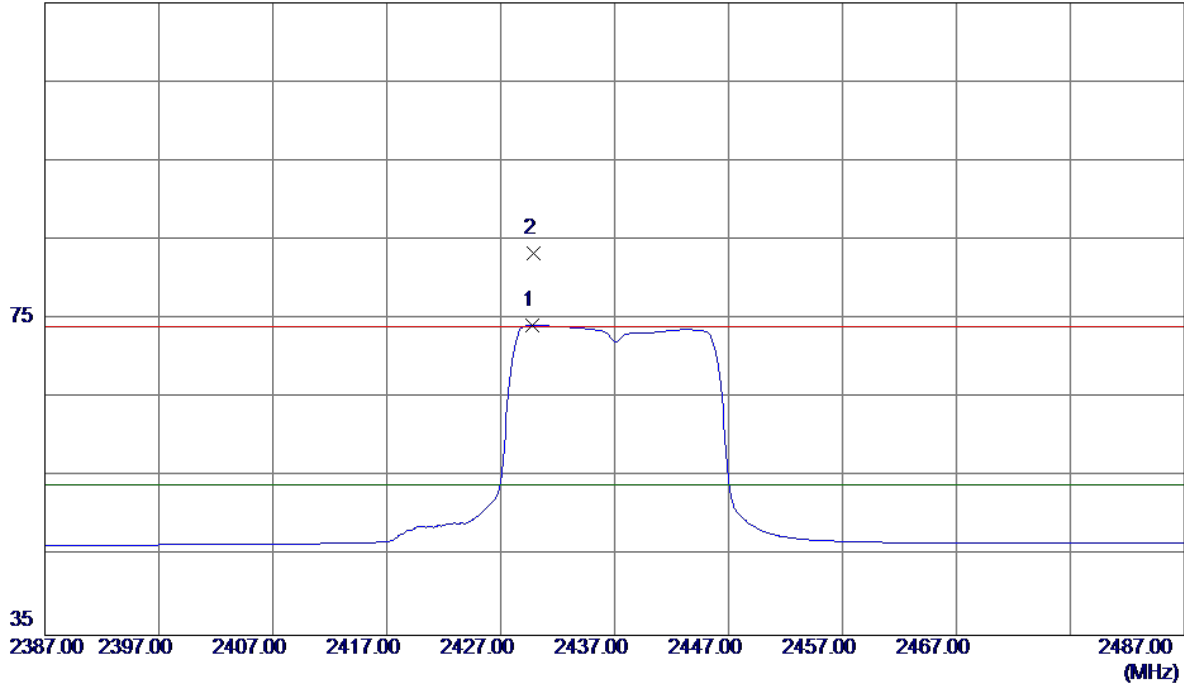

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2429.8000	40.97	33.21	74.18	54.00	20.18	AVG	No Limit
2	2429.9000	50.12	33.21	83.33	74.00	9.33	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz


Vertical

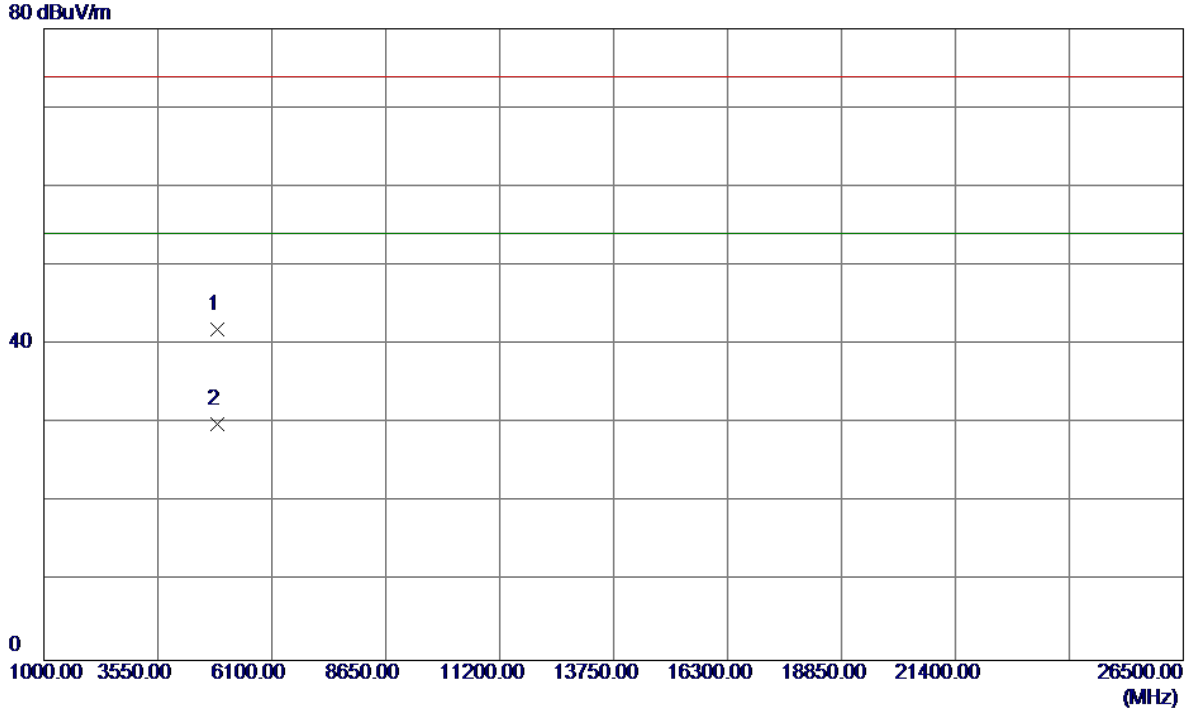

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4874.6260	35.43	6.44	41.87	74.00	-32.13	Peak	
2 *	4874.9120	23.43	6.44	29.87	54.00	-24.13	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz


Horizontal

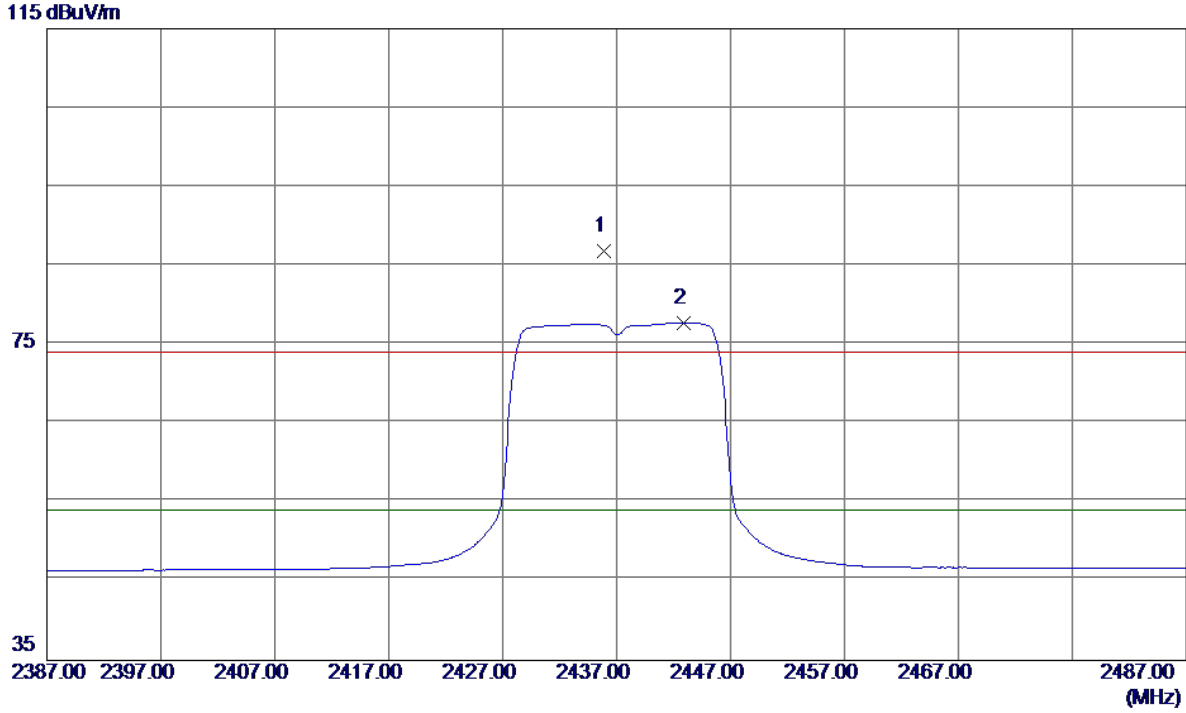

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2435.9000	53.65	33.23	86.88	74.00	12.88	Peak	No Limit
2 *	2442.9000	44.50	33.26	77.76	54.00	23.76	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz

Horizontal

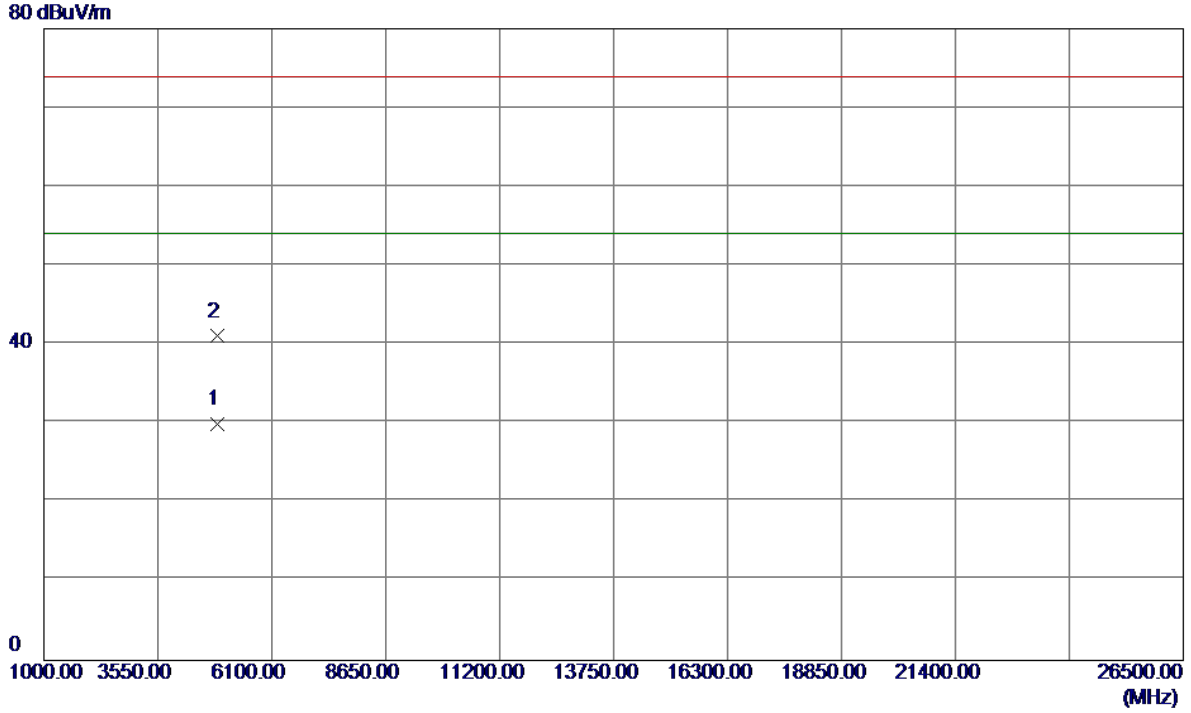


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4874.4720	23.52	6.44	29.96	54.00	-24.04	AVG	
2	4874.7140	34.60	6.44	41.04	74.00	-32.96	Peak	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz

Vertical


115 dBuV/m

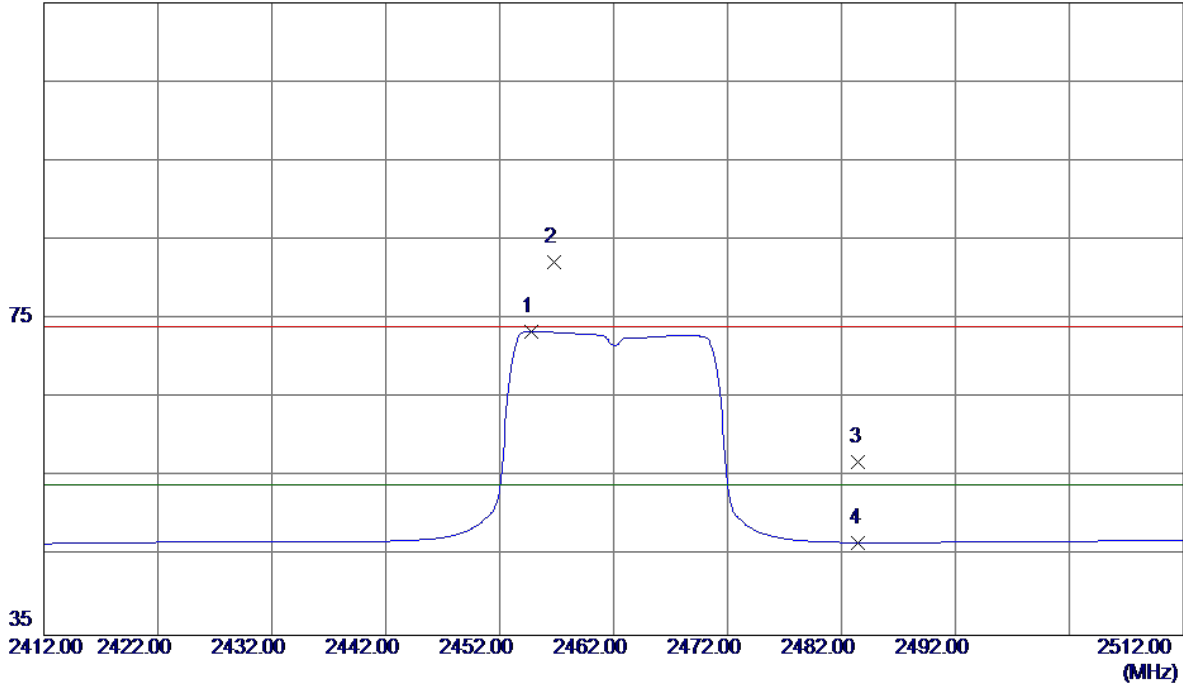

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2454.8000	40.12	33.30	73.42	54.00	19.42	AVG	No Limit
2	2456.8000	48.81	33.31	82.12	74.00	8.12	Peak	No Limit
3	2483.5000	23.48	33.41	56.89	74.00	-17.11	Peak	
4	2483.5000	13.33	33.41	46.74	54.00	-7.26	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz

Vertical

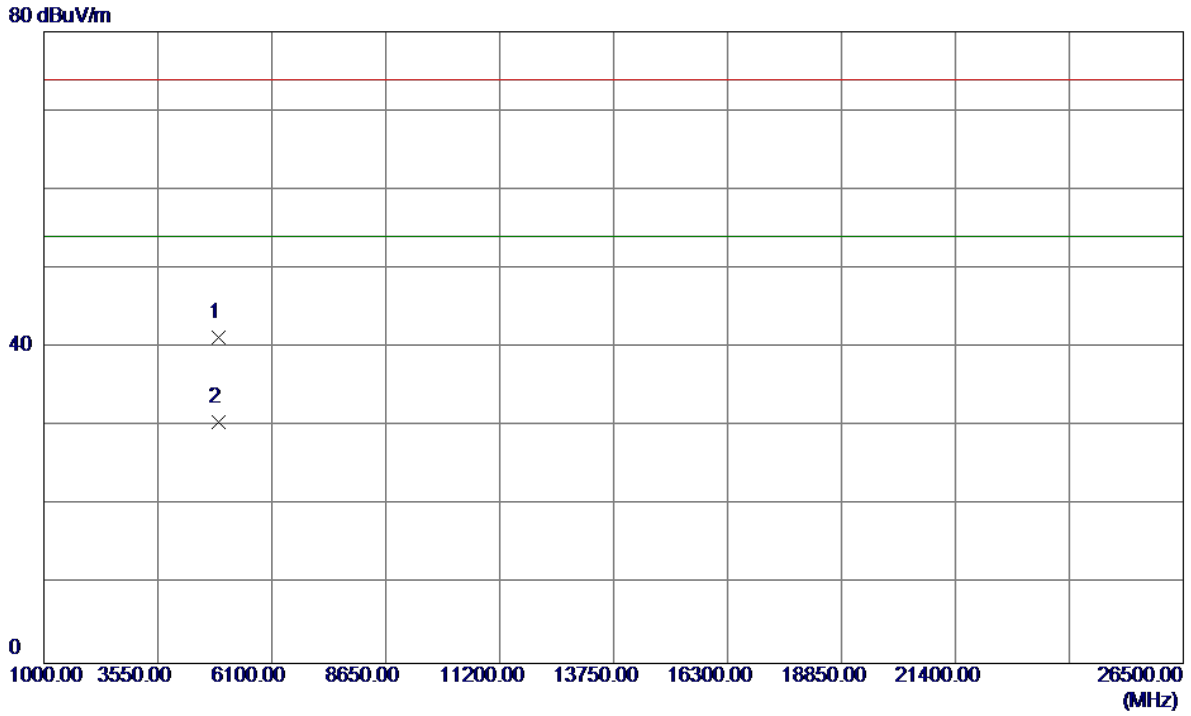


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4923.1860	34.68	6.57	41.25	74.00	-32.75	Peak	
2 *	4924.1080	24.00	6.57	30.57	54.00	-23.43	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz

Horizontal


115 dBuV/m

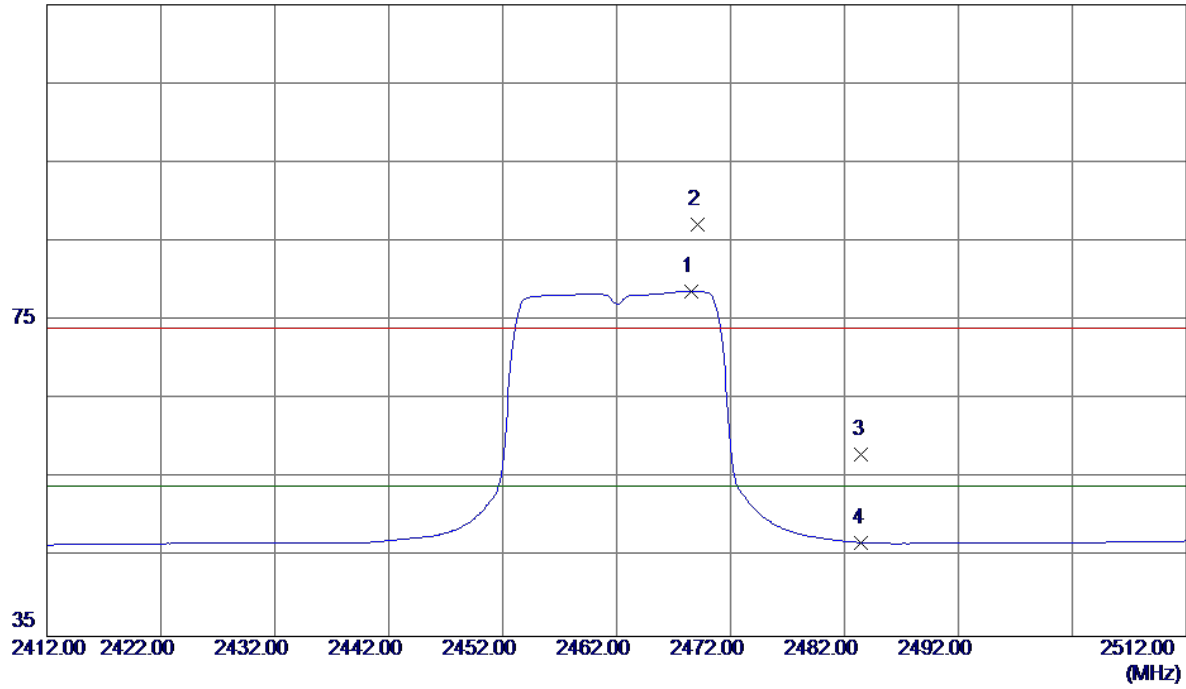

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2468.6000	45.36	33.35	78.71	54.00	24.71	AVG	No Limit
2	2469.1000	53.75	33.35	87.10	74.00	13.10	Peak	No Limit
3	2483.5000	24.62	33.41	58.03	74.00	-15.97	Peak	
4	2483.5000	13.47	33.41	46.88	54.00	-7.12	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz

Horizontal

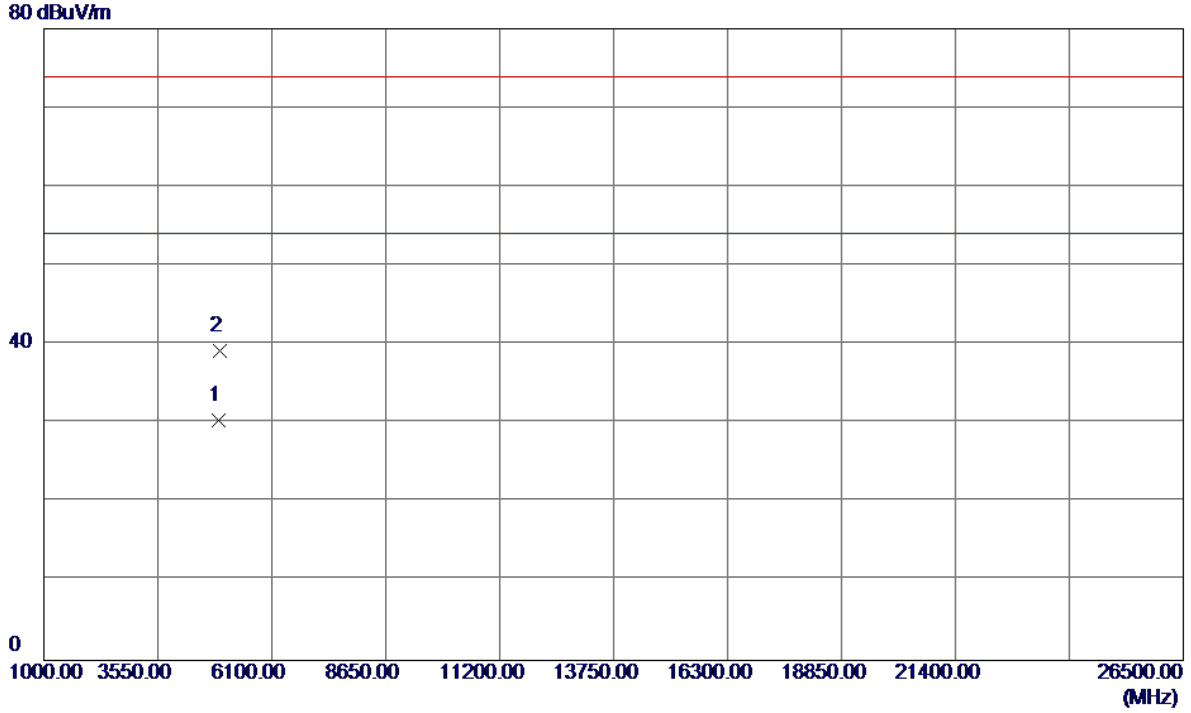


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4923.8800	23.81	6.57	30.38	54.00	-23.62	AVG	
2	4924.2700	32.70	6.57	39.27	74.00	-34.73	Peak	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz

Vertical


115 dBuV/m

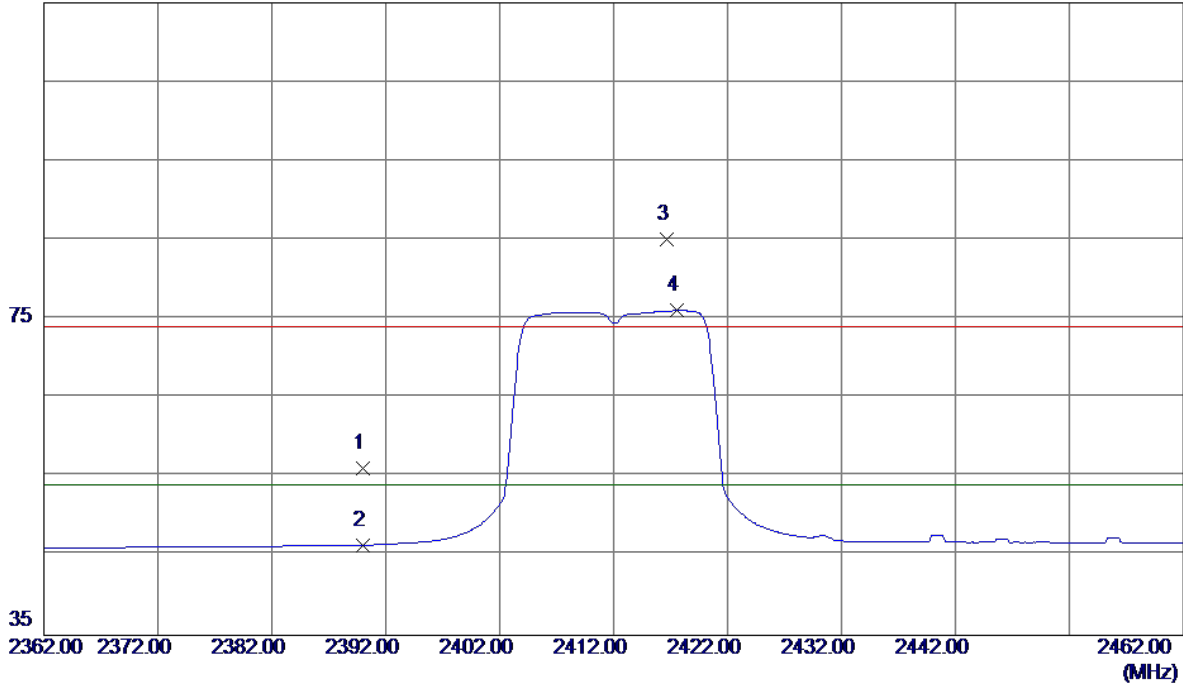

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	23.12	33.06	56.18	74.00	-17.82	Peak	
2	2390.0000	13.34	33.06	46.40	54.00	-7.60	AVG	
3	2416.7000	52.00	33.16	85.16	74.00	11.16	Peak	No Limit
4 *	2417.6000	42.91	33.16	76.07	54.00	22.07	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz

Vertical

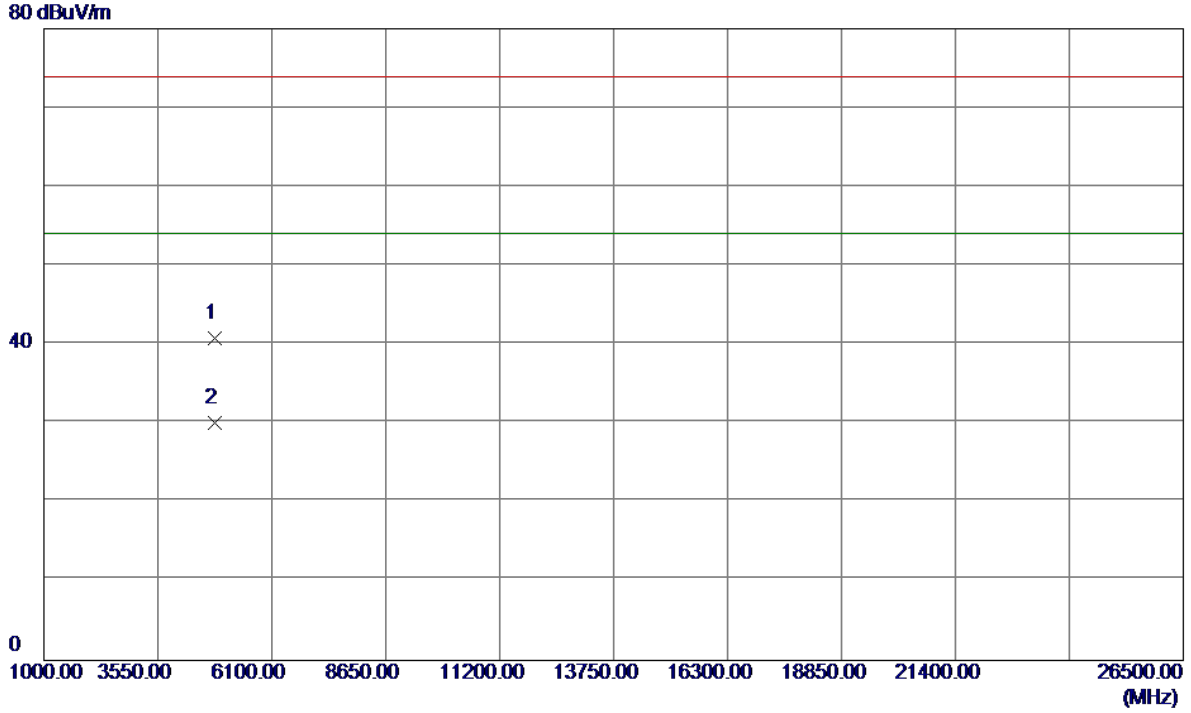


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4824.3980	34.50	6.32	40.82	74.00	-33.18	Peak	
2 *	4824.7280	23.76	6.32	30.08	54.00	-23.92	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz

Horizontal


115 dBuV/m

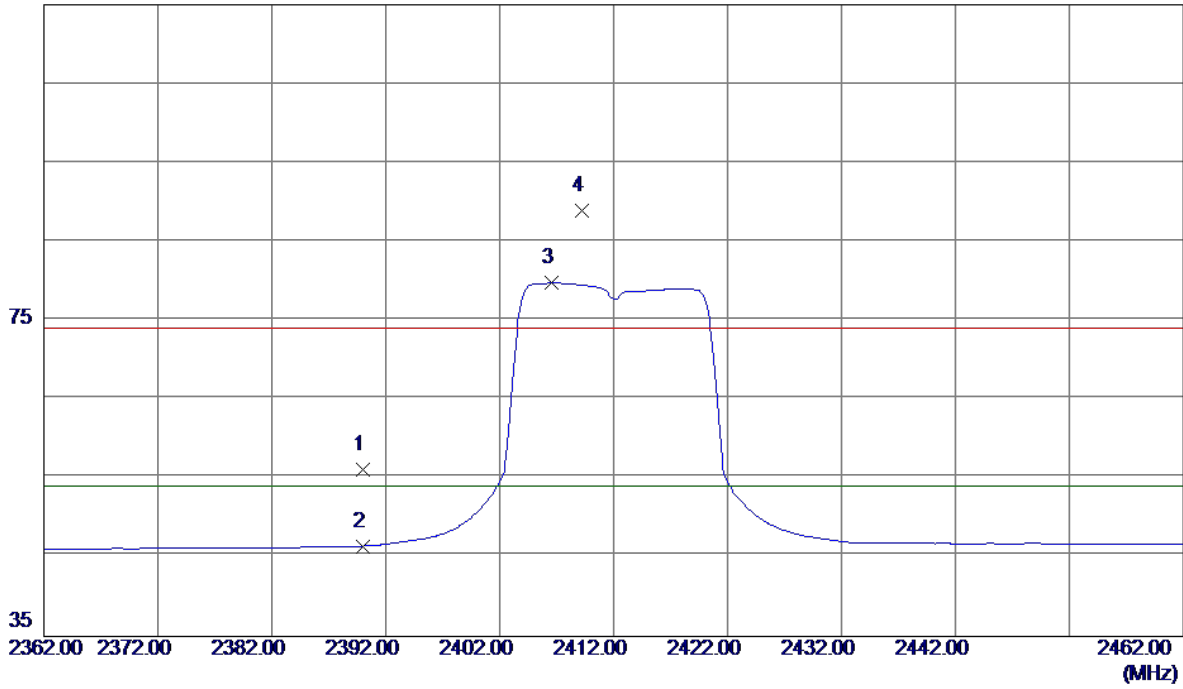

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	23.03	33.06	56.09	74.00	-17.91	Peak	
2	2390.0000	13.37	33.06	46.43	54.00	-7.57	AVG	
3 *	2406.6000	46.62	33.12	79.74	54.00	25.74	AVG	No Limit
4	2409.2000	55.85	33.13	88.98	74.00	14.98	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz

Horizontal

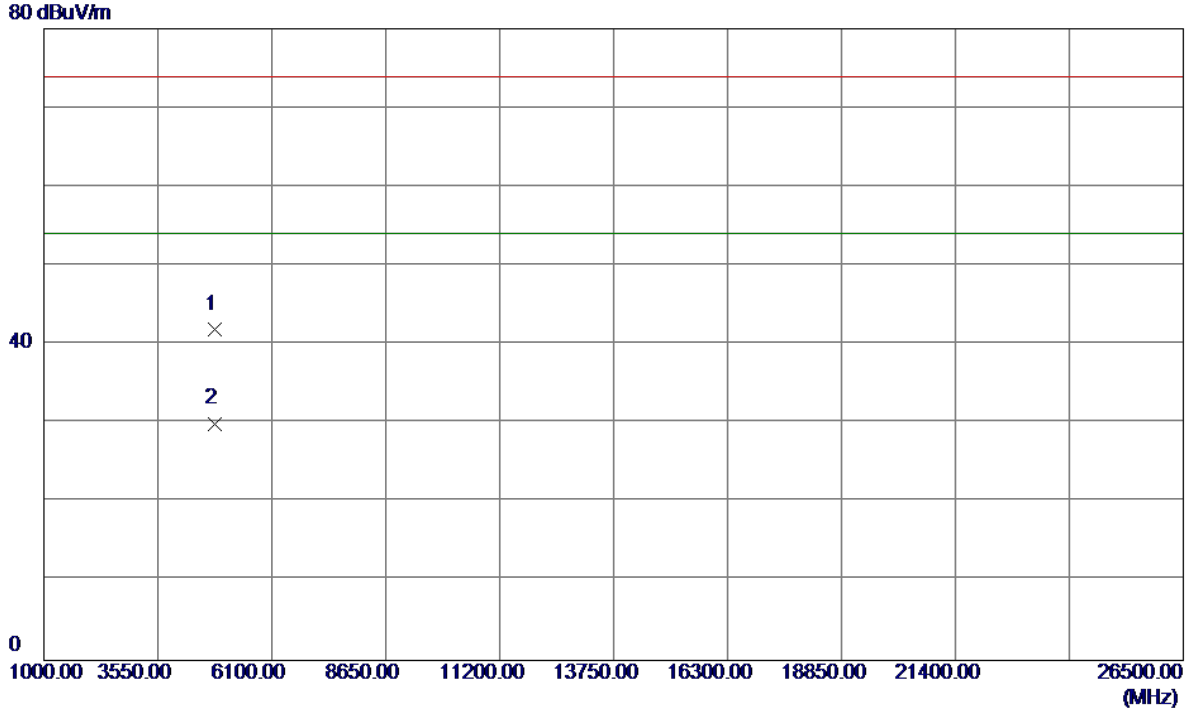


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4823.9640	35.63	6.32	41.95	74.00	-32.05	Peak	
2 *	4824.3660	23.68	6.32	30.00	54.00	-24.00	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz

Vertical


115 dBuV/m

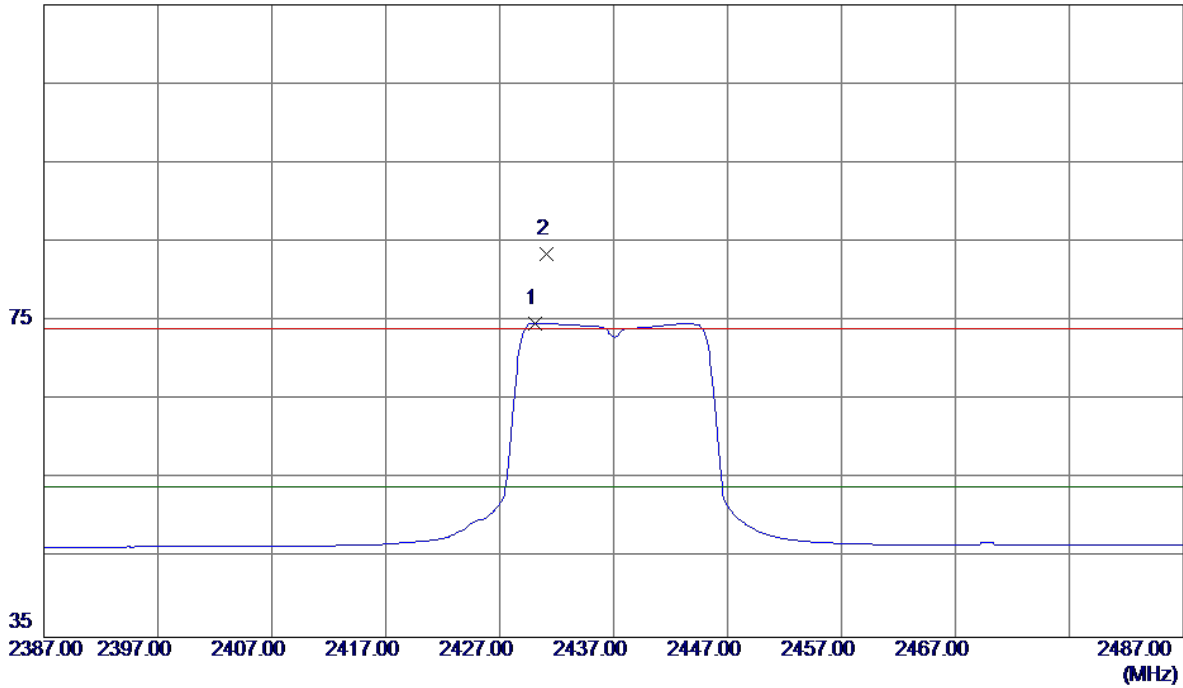

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2430.1000	41.54	33.21	74.75	54.00	20.75	AVG	No Limit
2	2431.1000	50.22	33.21	83.43	74.00	9.43	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz


Vertical

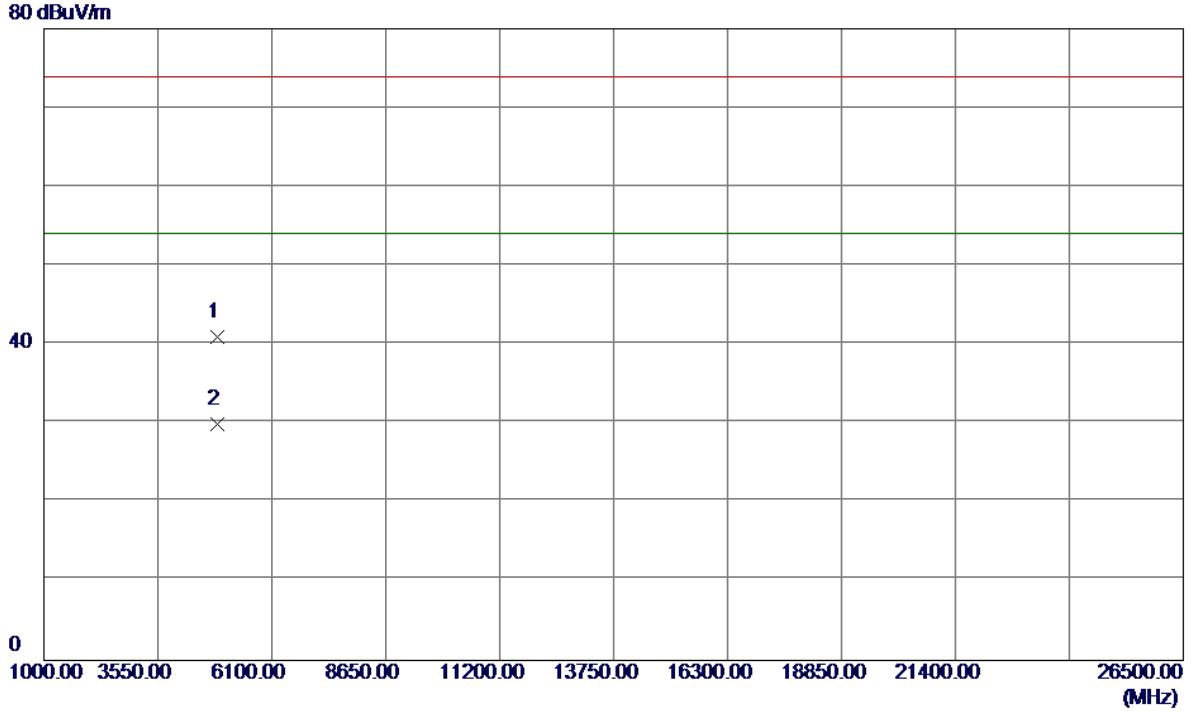

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4873.6020	34.47	6.44	40.91	74.00	-33.09	Peak	
2 *	4874.2620	23.42	6.44	29.86	54.00	-24.14	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz


Horizontal

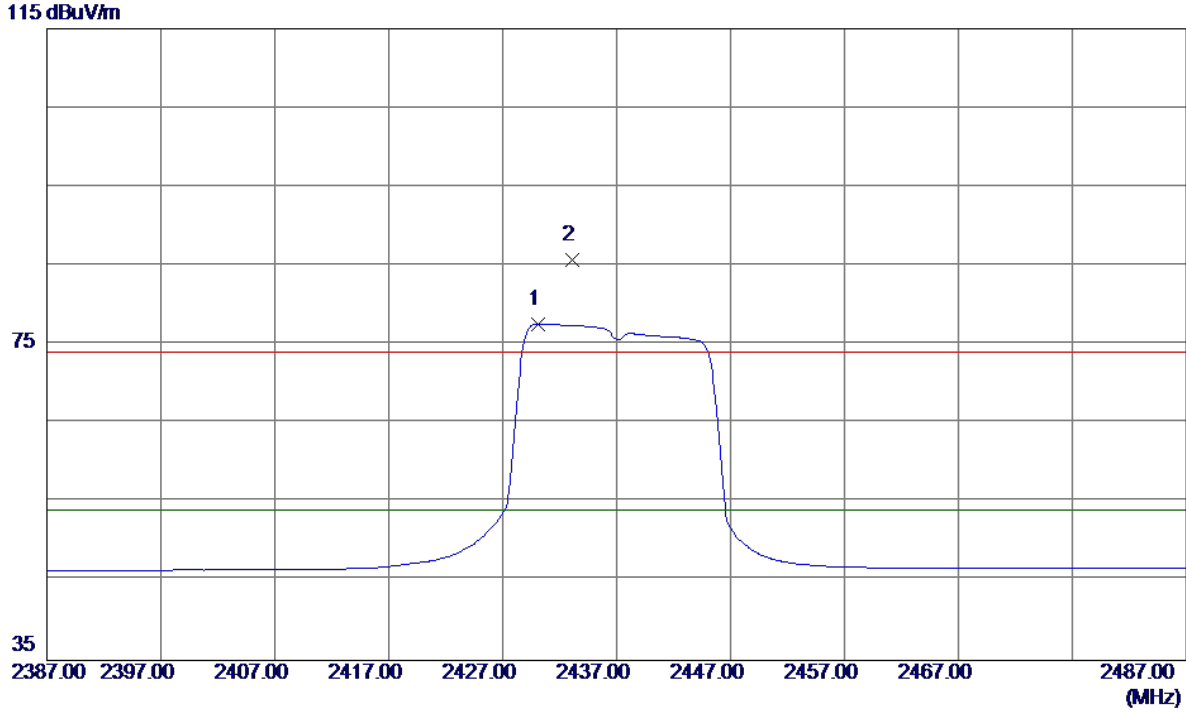

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2430.1000	44.36	33.21	77.57	54.00	23.57	AVG	No Limit
2	2433.1000	52.53	33.22	85.75	74.00	11.75	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz

Horizontal

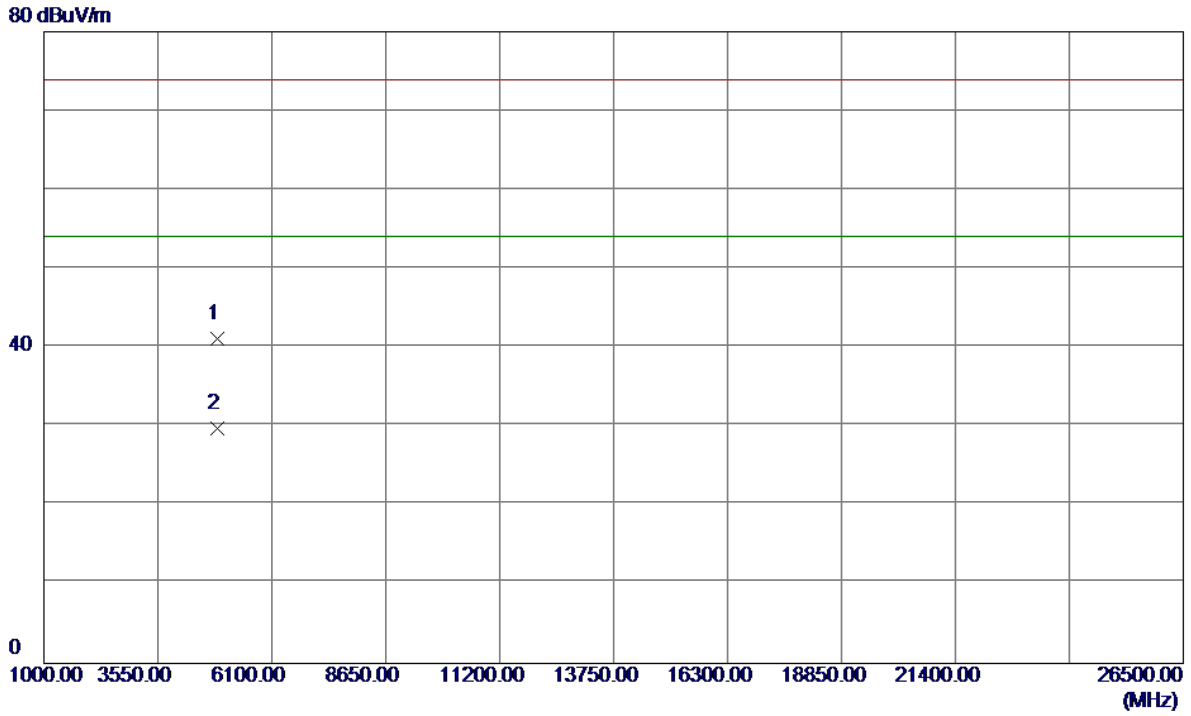


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4874.8400	34.73	6.44	41.17	74.00	-32.83	Peak	
2 *	4874.8560	23.36	6.44	29.80	54.00	-24.20	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz

Vertical


115 dBuV/m

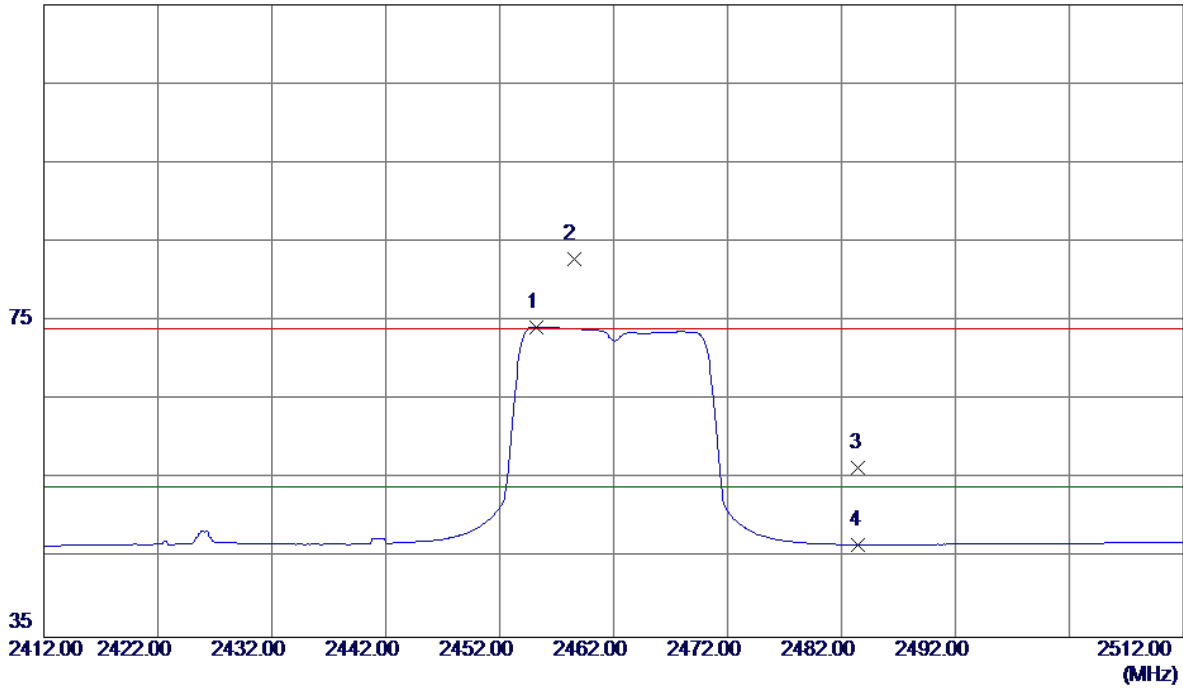

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2455.2000	40.96	33.30	74.26	54.00	20.26	AVG	No Limit
2	2458.5000	49.56	33.31	82.87	74.00	8.87	Peak	No Limit
3	2483.5000	23.00	33.41	56.41	74.00	-17.59	Peak	
4	2483.5000	13.32	33.41	46.73	54.00	-7.27	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz

Vertical

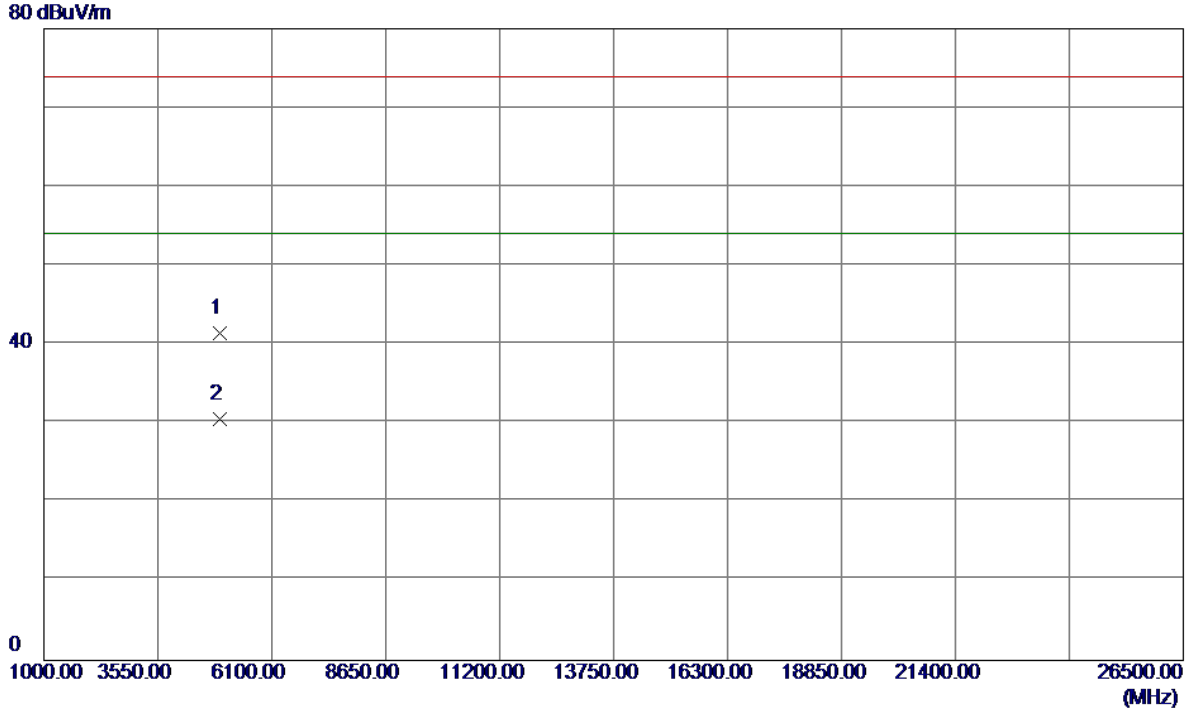


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4924.7080	34.90	6.57	41.47	74.00	-32.53	Peak	
2 *	4924.8300	23.99	6.57	30.56	54.00	-23.44	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz

Horizontal


115 dBuV/m

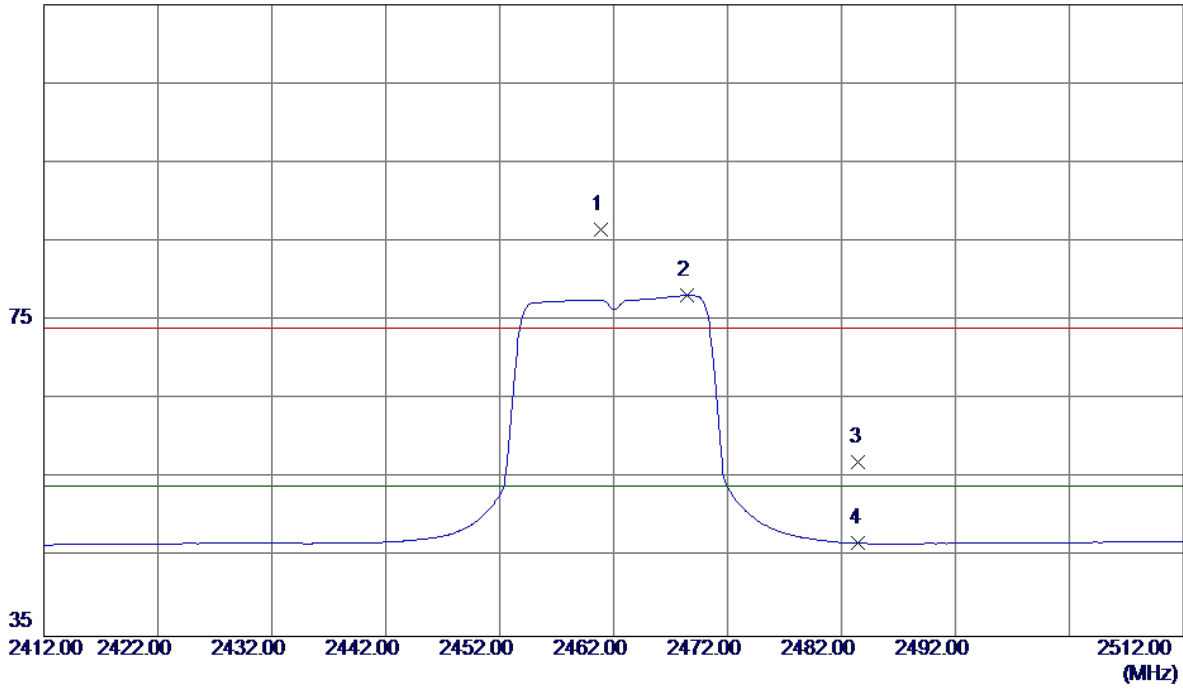

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2460.9000	53.18	33.32	86.50	74.00	12.50	Peak	No Limit
2 *	2468.4000	44.80	33.35	78.15	54.00	24.15	AVG	No Limit
3	2483.5000	23.73	33.41	57.14	74.00	-16.86	Peak	
4	2483.5000	13.37	33.41	46.78	54.00	-7.22	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz

Horizontal

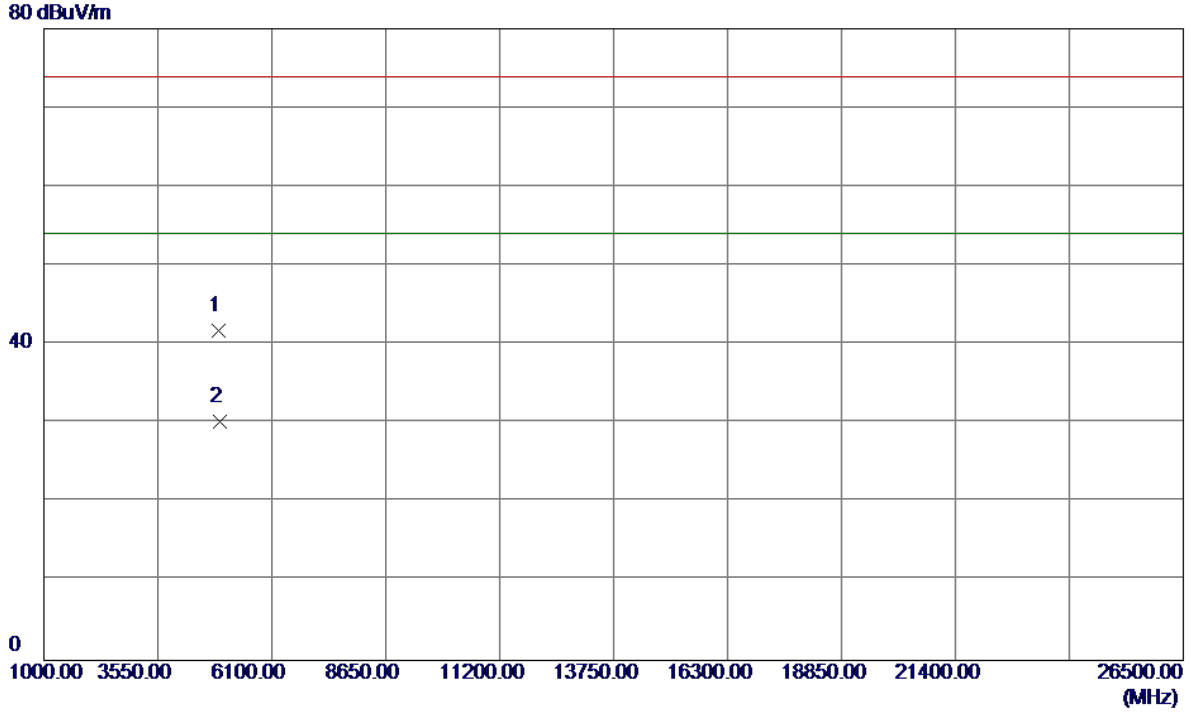


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4923.9800	35.12	6.57	41.69	74.00	-32.31	Peak	
2 *	4924.6280	23.63	6.57	30.20	54.00	-23.80	AVG	

APPENDIX E - BANDWIDTH

Test Mode: TX G Mode_CH01/06/11


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	16.43	16.56	500	Complies
2437	16.42	16.52	500	Complies
2462	16.42	16.52	500	Complies

TX CH01

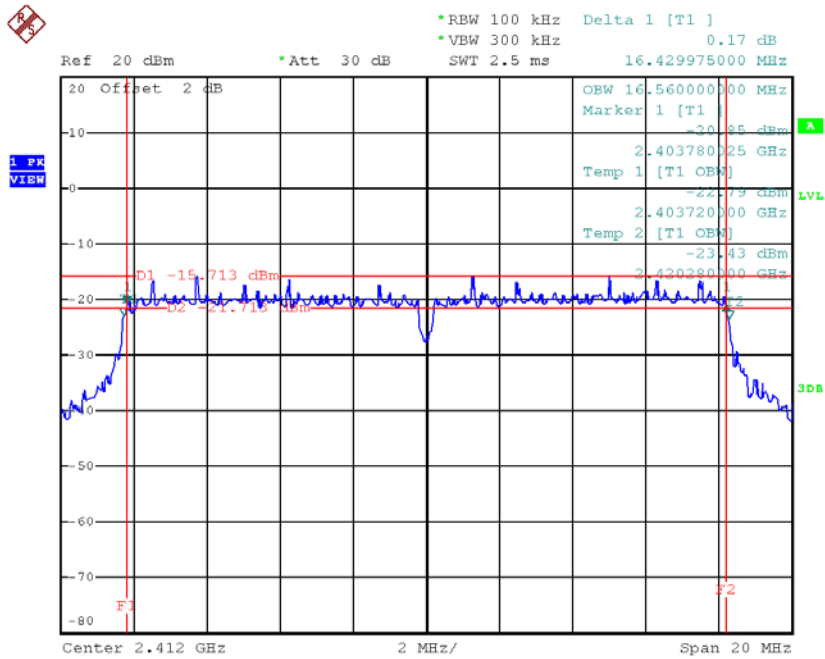


Date: 3.AUG.2017 10:39:43

TX CH06

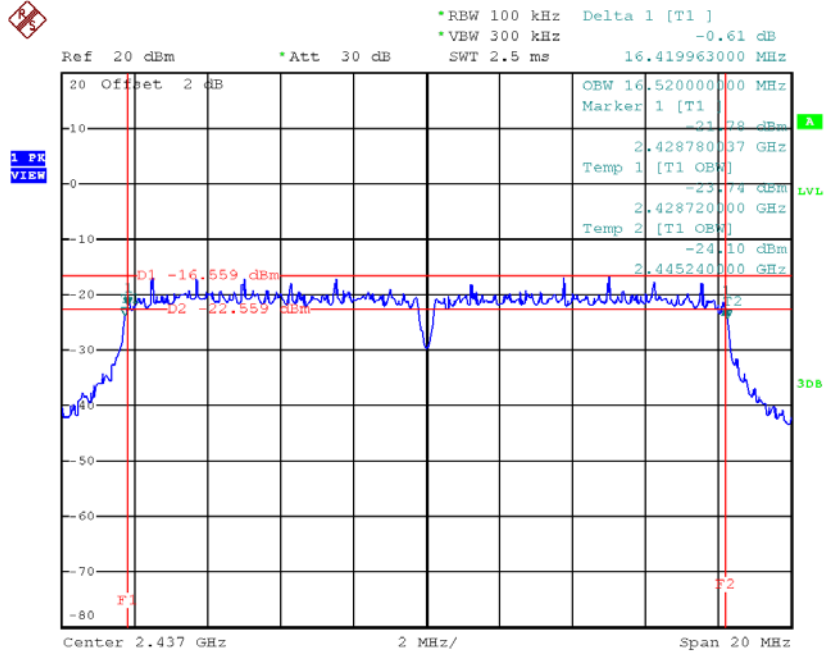

Date: 3.AUG.2017 10:48:44

TX CH11

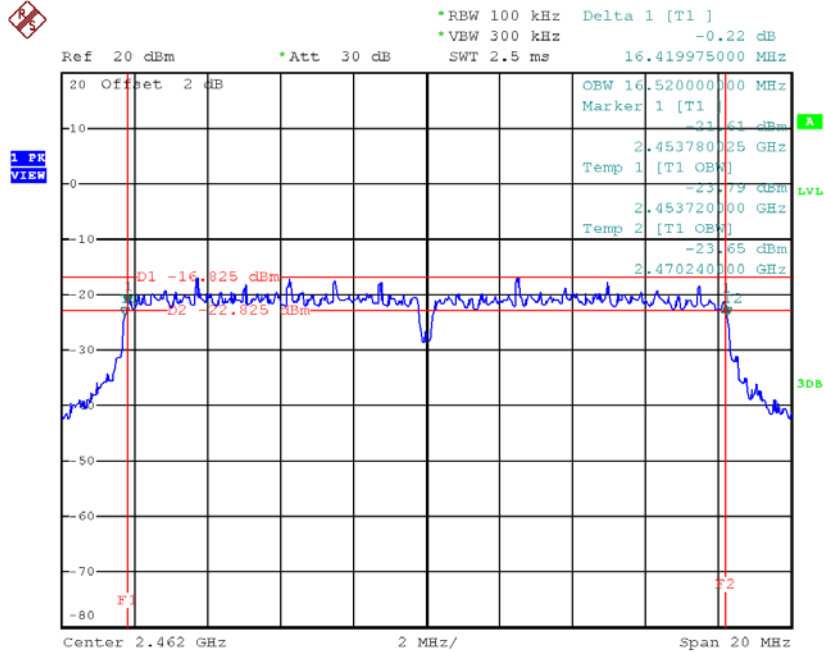


Date: 3.AUG.2017 10:50:00

Test Mode : TX N-20MHz Mode_CH01/06/11


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	17.64	17.72	500	Complies
2437	17.62	17.64	500	Complies
2462	17.62	17.68	500	Complies

TX CH01

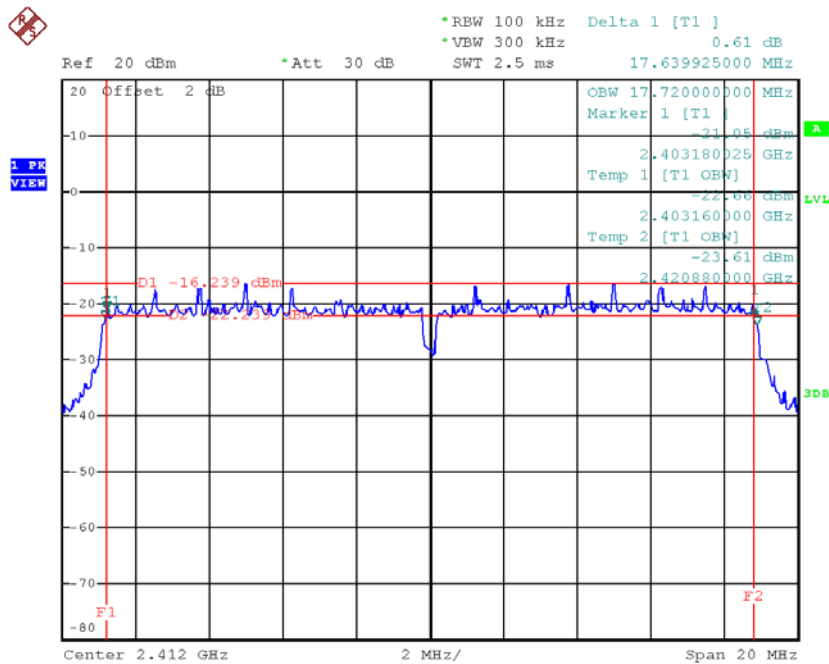


Date: 3.AUG.2017 10:52:21

TX CH06

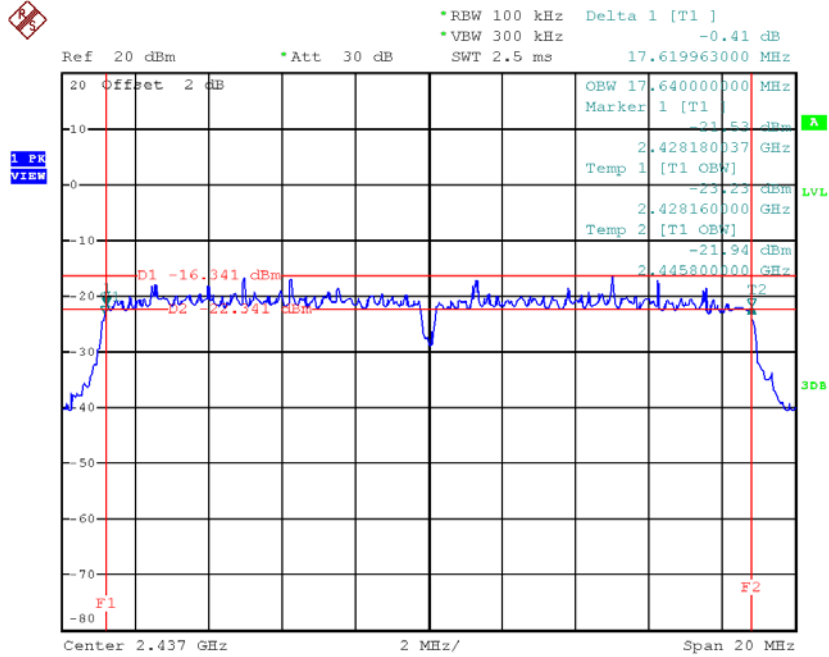

Date: 3.AUG.2017 10:53:17

TX CH11

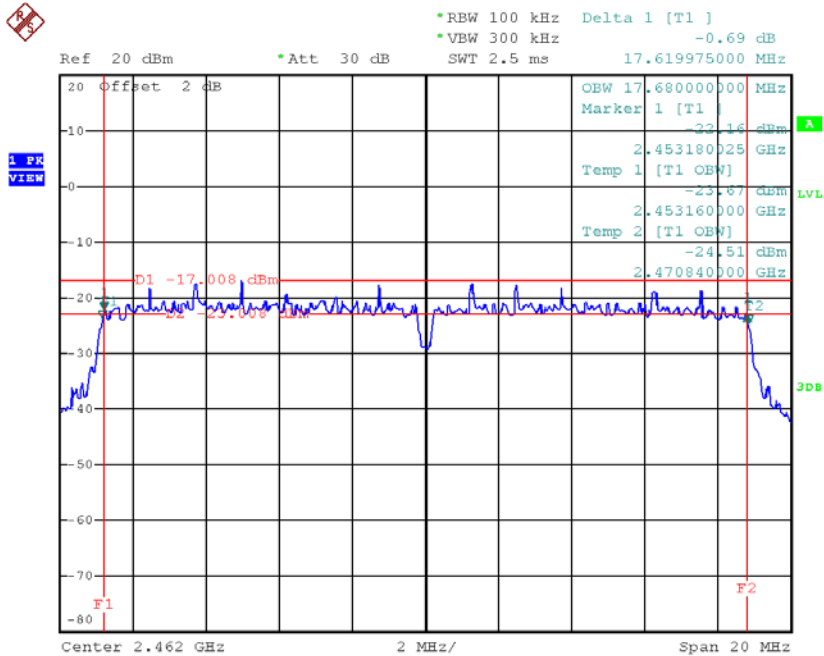

Date: 3.AUG.2017 10:54:52

APPENDIX F – MAXIMUM CONDUCTED OUTPUT POWER


Test Mode :TX G Mode_CH01/06/11					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	-5.83	0.00026	30.00	1.00	Complies
2437	-6.11	0.00024	30.00	1.00	Complies
2462	-5.77	0.00026	30.00	1.00	Complies

Test Mode :TX N20 Mode_CH01/06/11					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	-6.42	0.00023	30.00	1.00	Complies
2437	-6.21	0.00024	30.00	1.00	Complies
2462	-6.45	0.00023	30.00	1.00	Complies

APPENDIX G - ANTENNA CONDUCTED SPURIOUS EMISSION


Test Mode : TX G Mode

TX G mode CH01

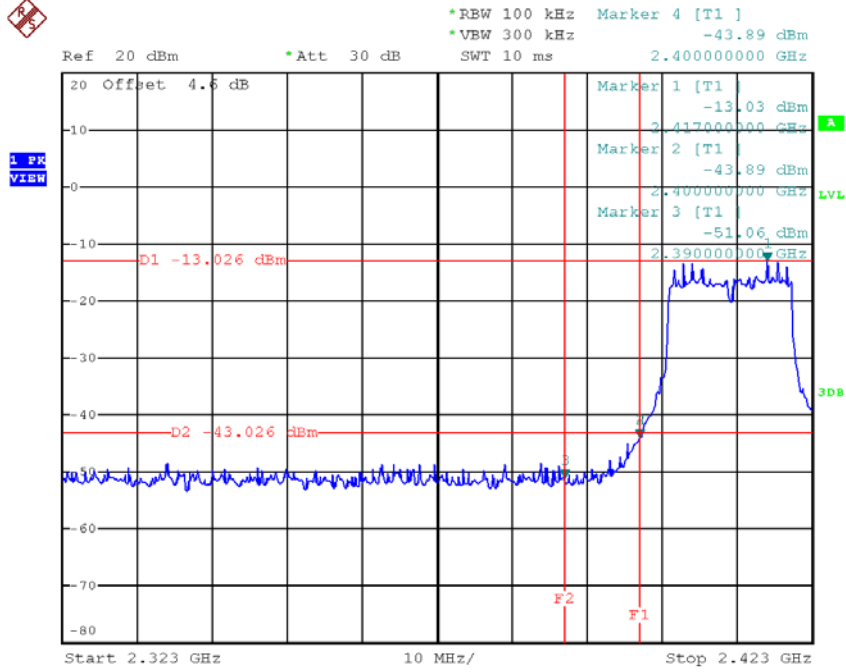


Date: 3.AUG.2017 10:42:54

TX G mode CH11

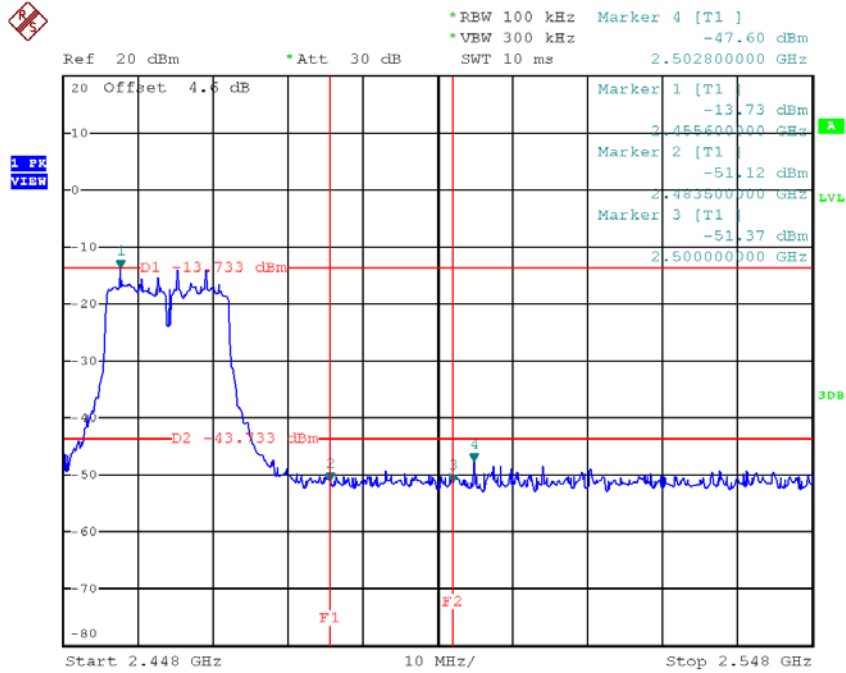


Date: 3.AUG.2017 10:50:15


TX G mode CH01 (10 Harmonic of the frequency)

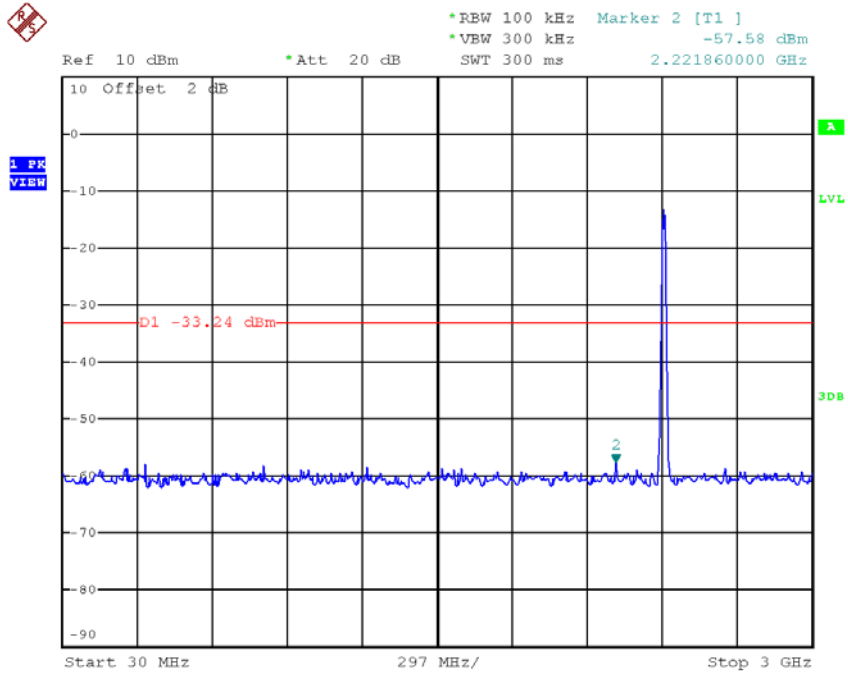

Date: 12.JUL.2017 16:20:40

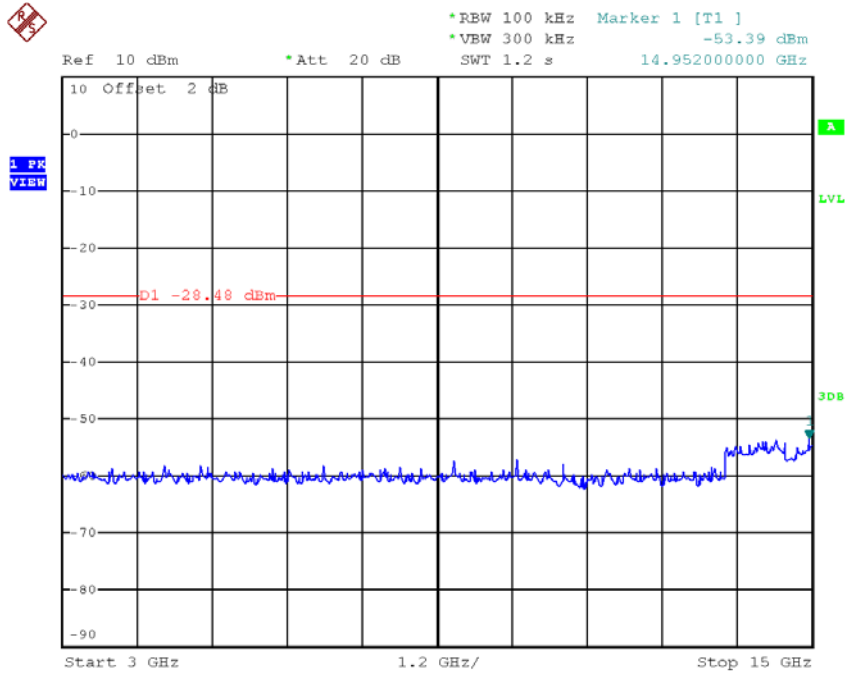


Date: 12.JUL.2017 16:09:53

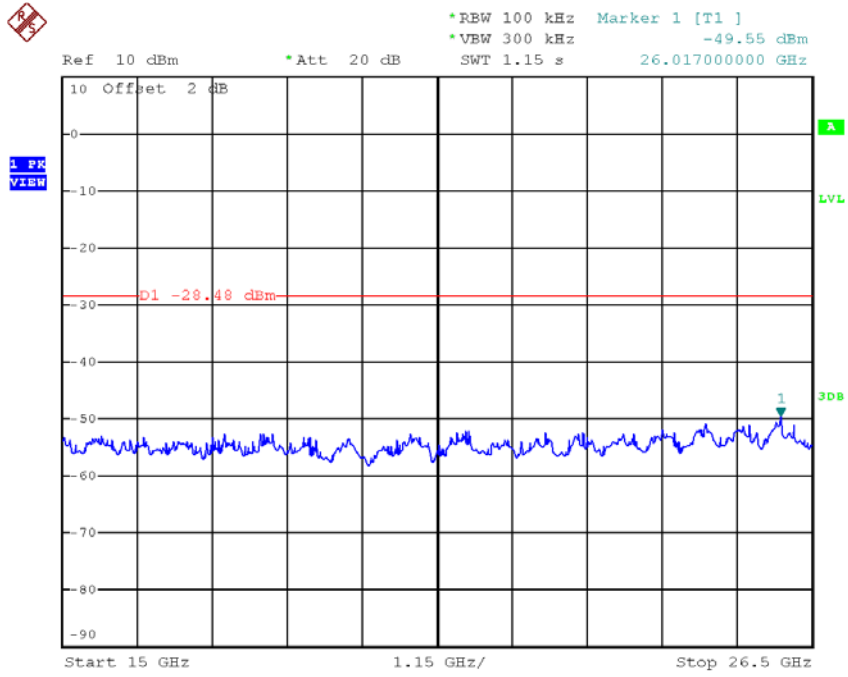


Date: 12.JUL.2017 16:10:00


TX G mode CH06 (10 Harmonic of the frequency)

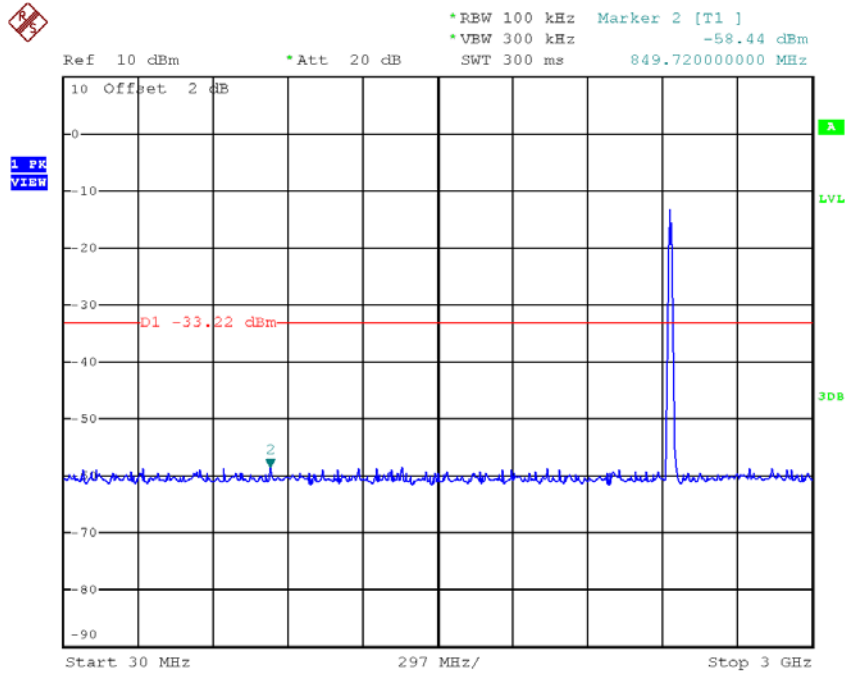

Date: 12.JUL.2017 16:21:15

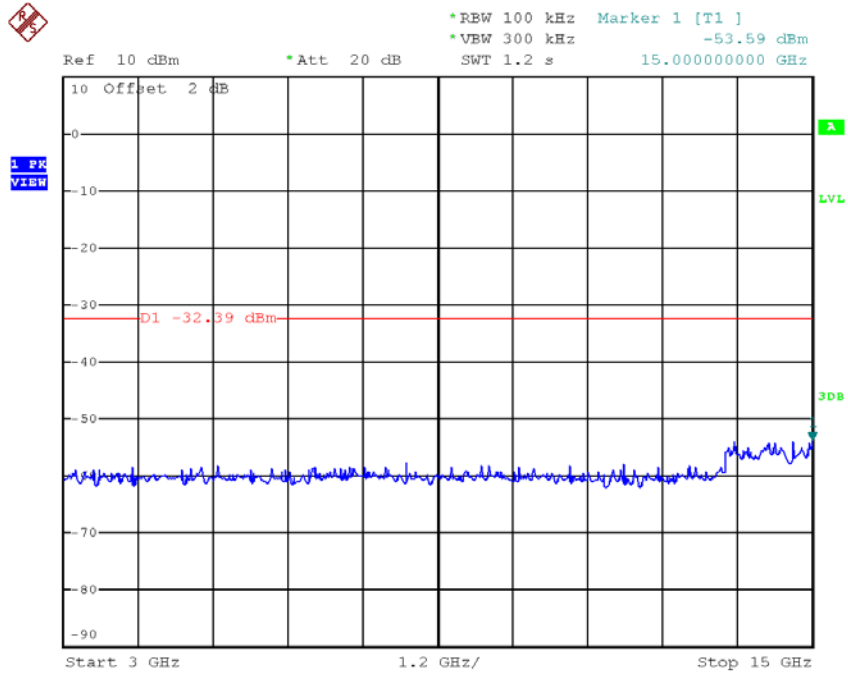


Date: 12.JUL.2017 16:11:36

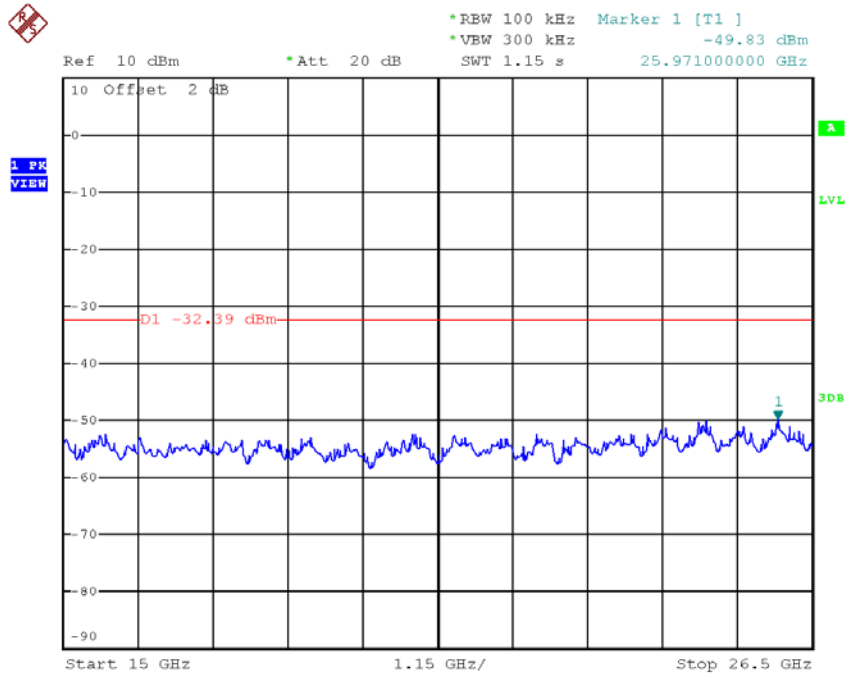


Date: 12.JUL.2017 16:11:43

TX G mode CH11 (10 Harmonic of the frequency)

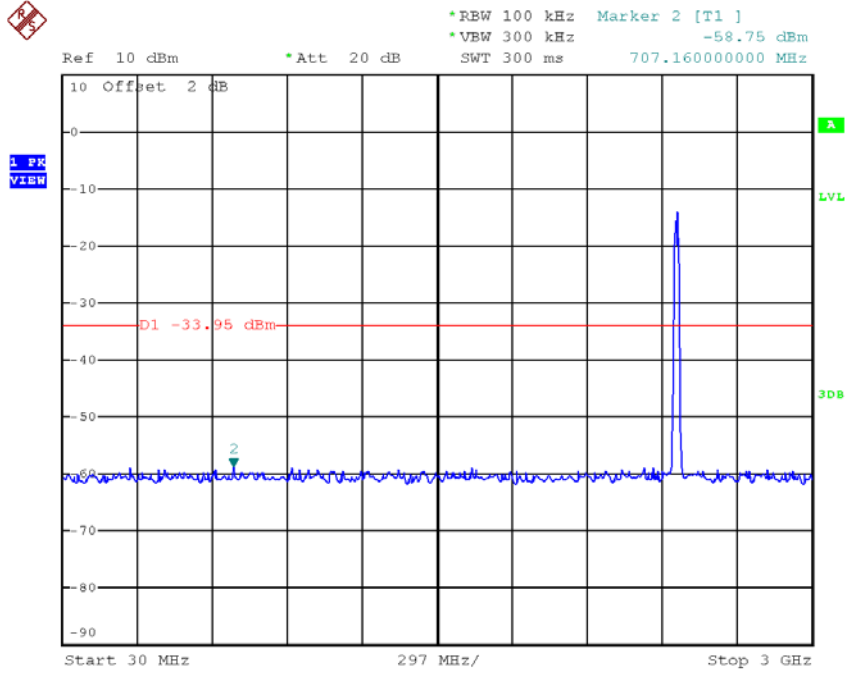


Date: 12.JUL.2017 16:21:41

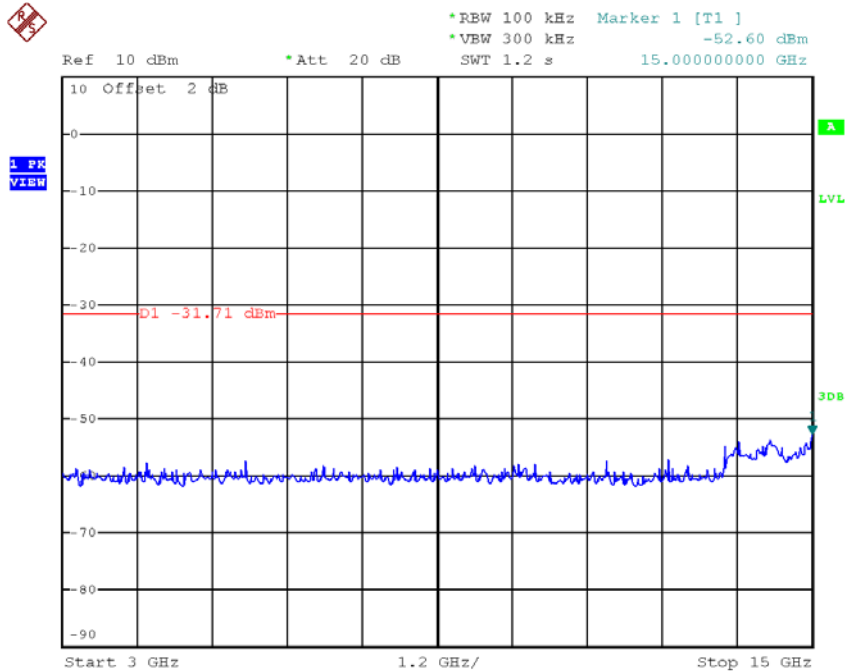

Date: 12.JUL.2017 16:13:11




*REW 100 kHz Marker 1 [T1]
*VBW 300 kHz -50.43 dBm
SWT 1.15 s 25.925000000 GHz

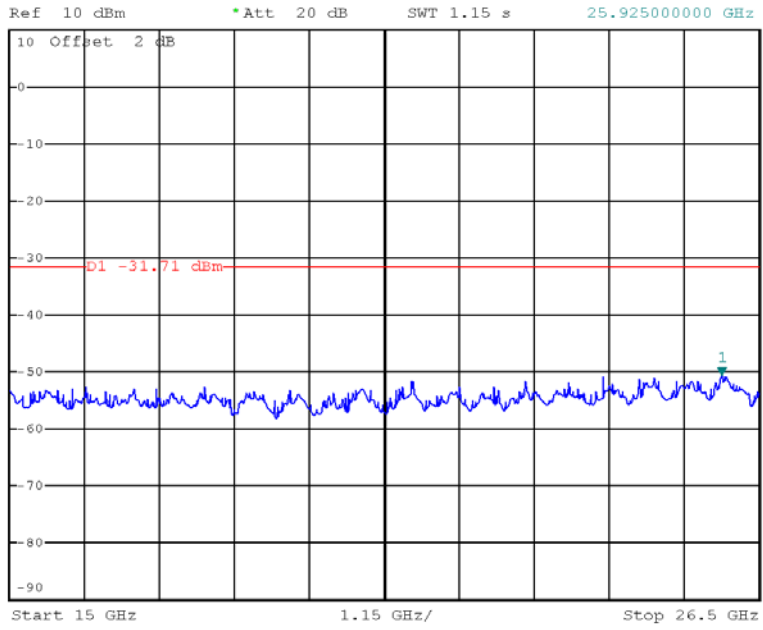

Date: 12.JUL.2017 16:13:18


Test Mode : TX N-20M Mode

TX HT20 mode CH01

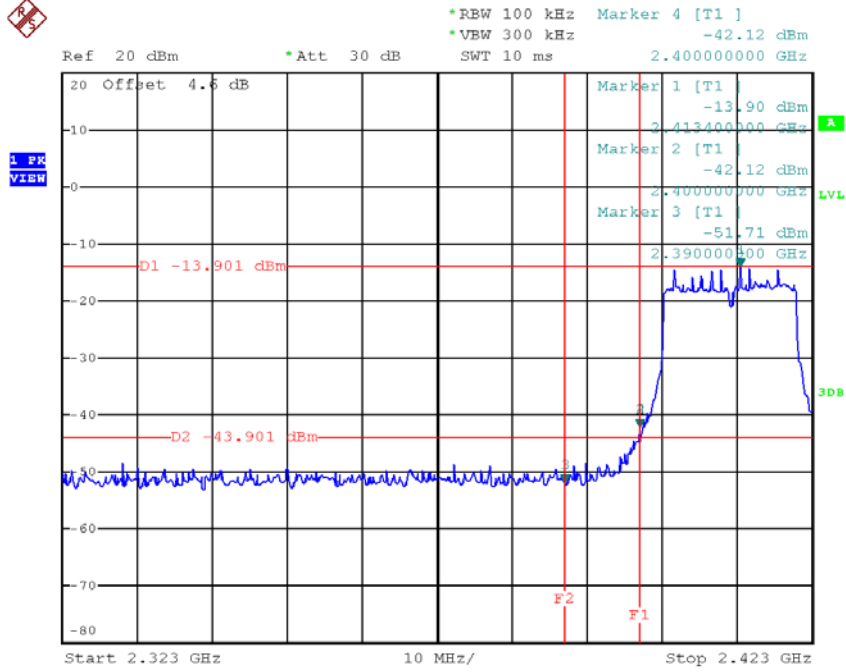


Date: 3.AUG.2017 10:52:37

TX HT20 mode CH11

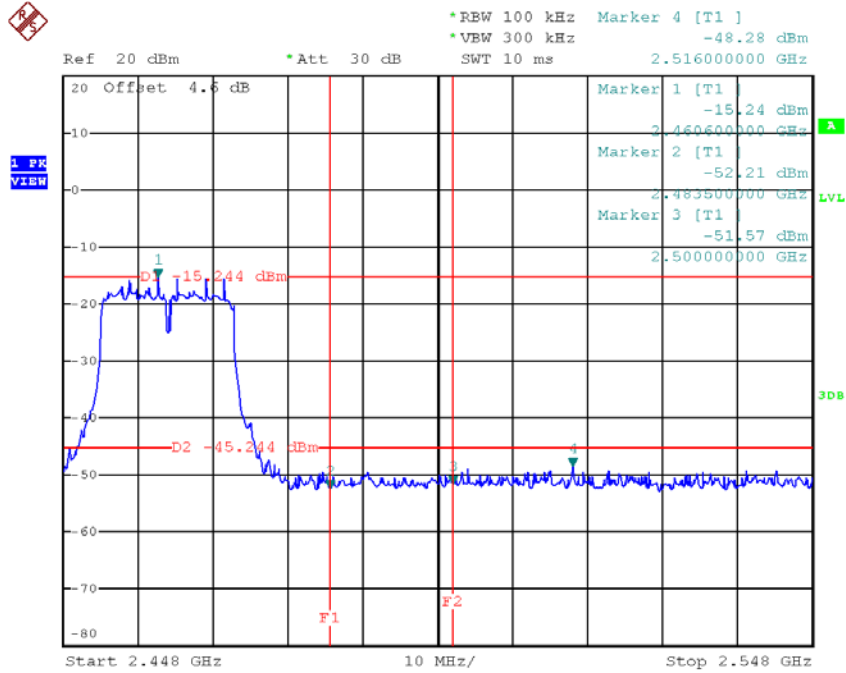


Date: 3.AUG.2017 10:55:08


TX HT20 mode CH01 (10 Harmonic of the frequency)

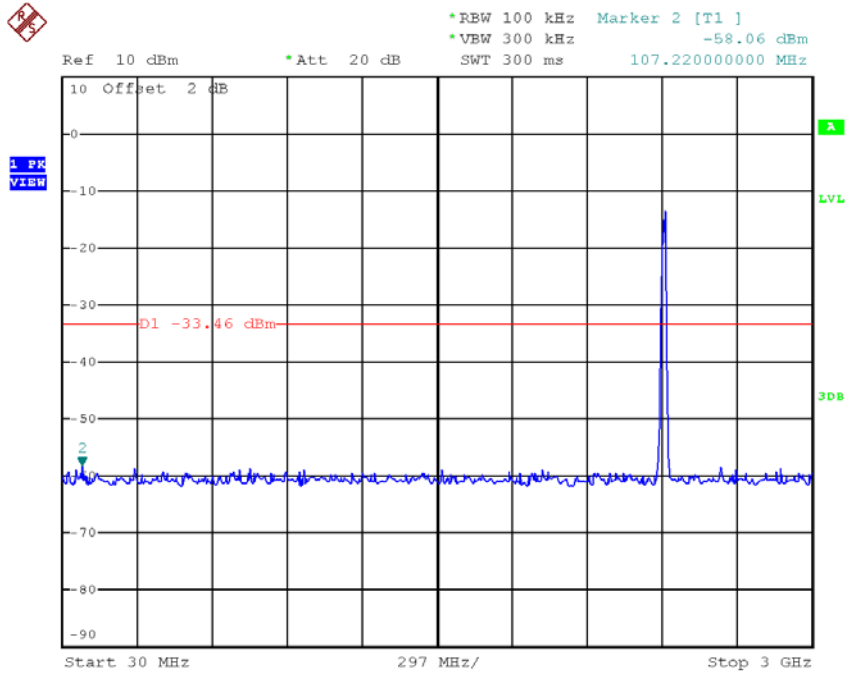

Date: 12.JUL.2017 16:22:11

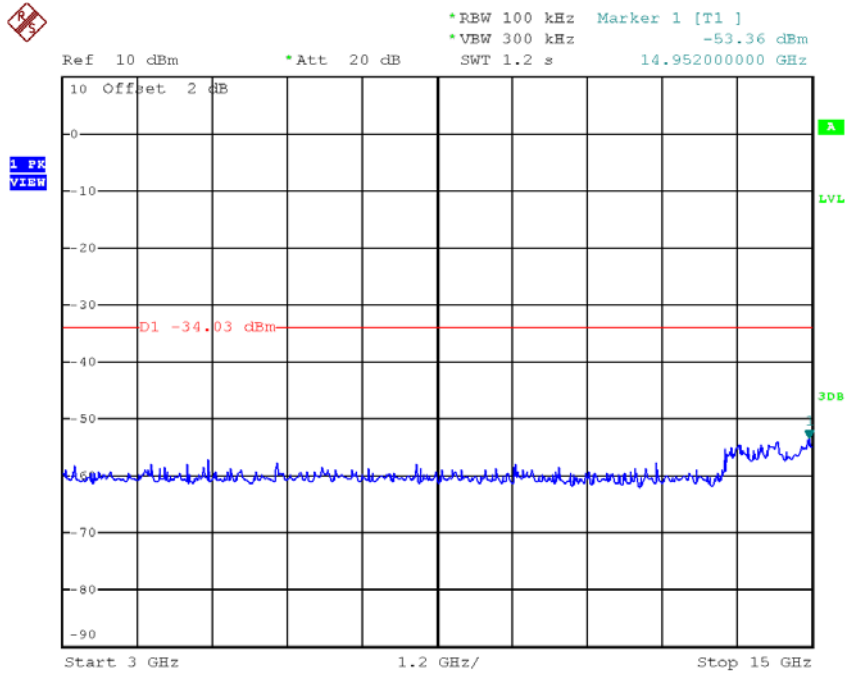


Date: 12.JUL.2017 16:15:18

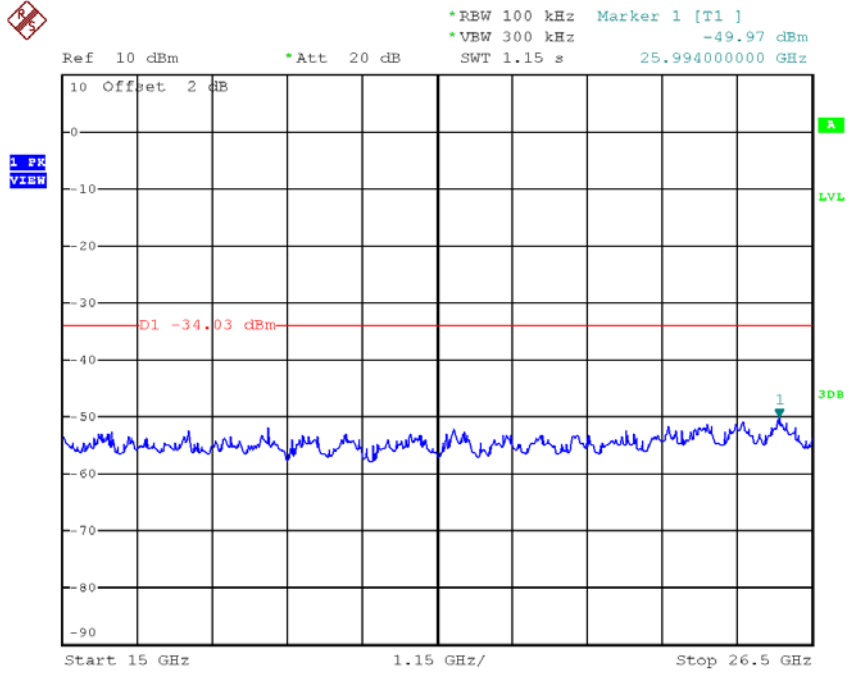


Date: 12.JUL.2017 16:15:25


TX HT20 mode CH06 (10 Harmonic of the frequency)

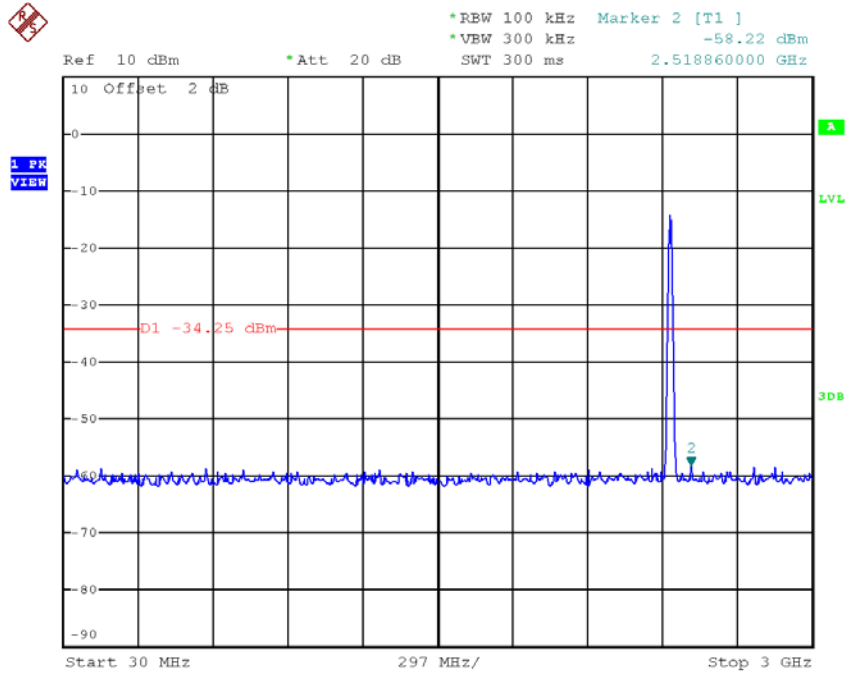

Date: 12.JUL.2017 16:22:39

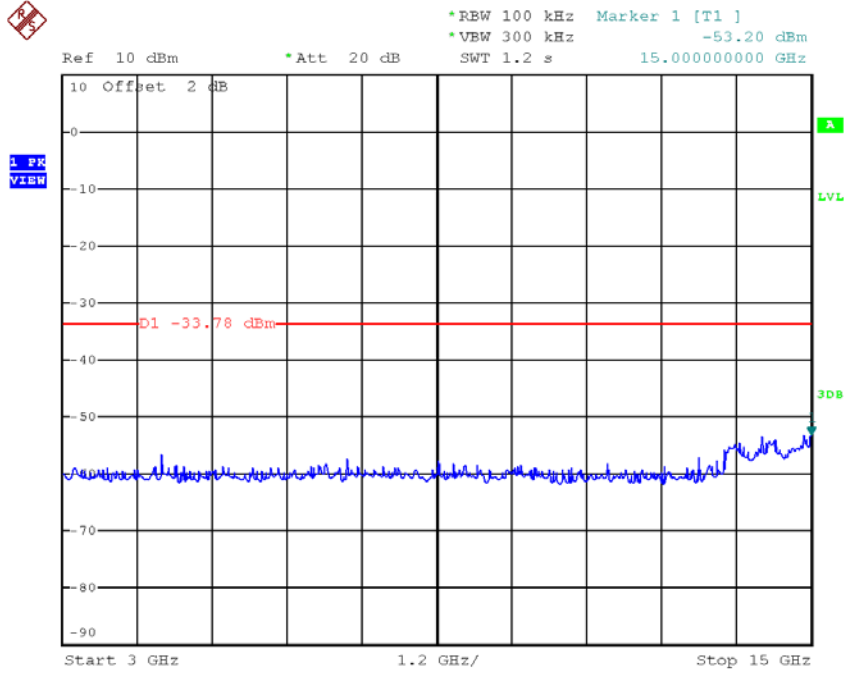


Date: 12.JUL.2017 16:17:09

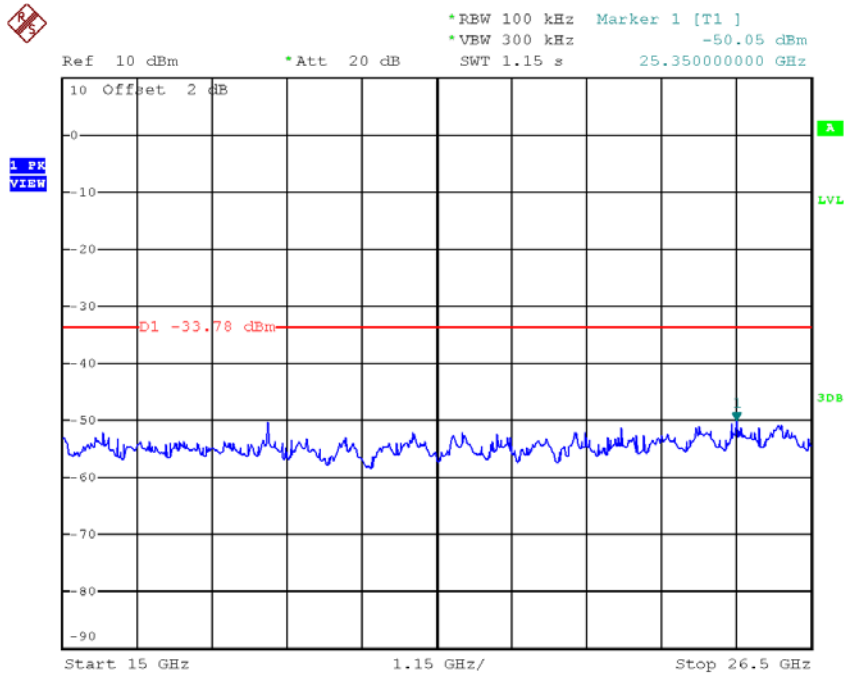


Date: 12.JUL.2017 16:17:16

TX HT20 mode CH11 (10 Harmonic of the frequency)

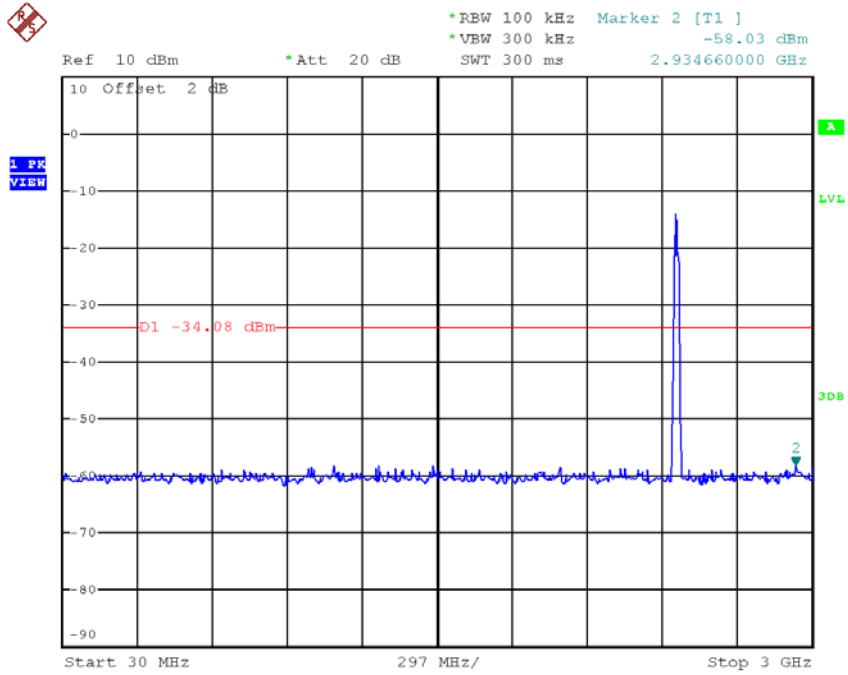


Date: 12.JUL.2017 16:24:24

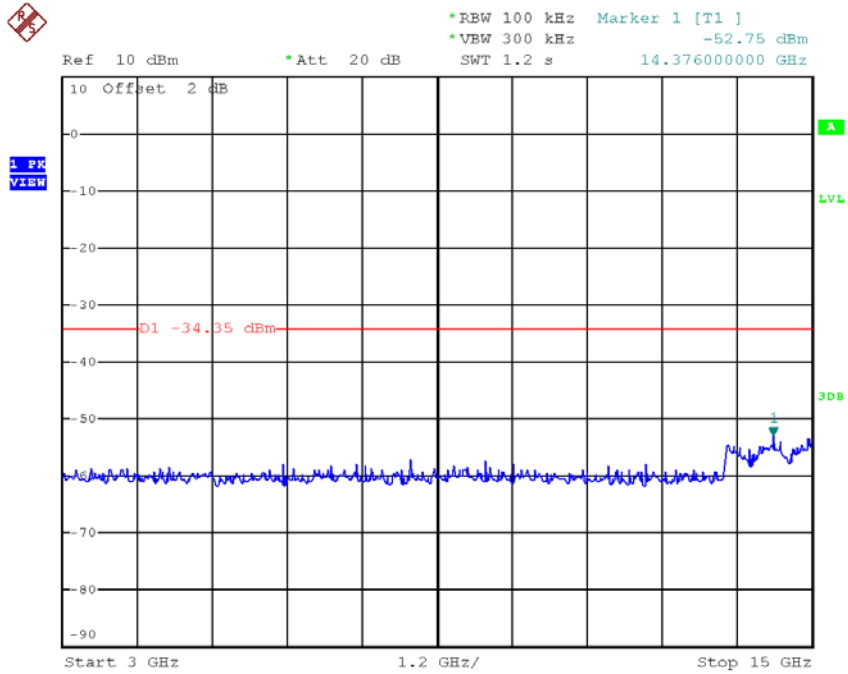

Date: 12.JUL.2017 16:18:57



*REW 100 kHz Marker 1 [T1]
*VBW 300 kHz -50.38 dBm
SWT 1.15 s 24.913000000 GHz

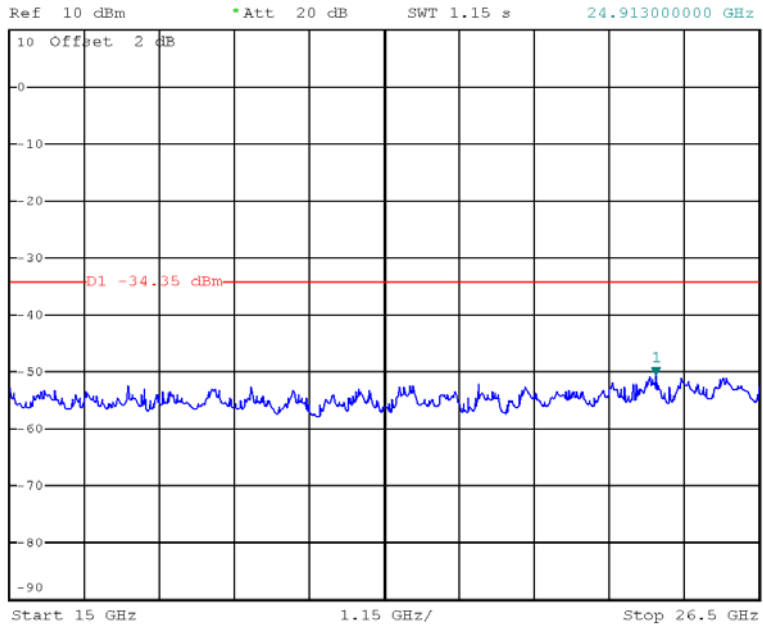


Date: 12.JUL.2017 16:19:04

APPENDIX H - POWER SPECTRAL DENSITY

Test Mode :TX G Mode_CH01/06/11


Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-28.50	0.0014	8.00	Complies
2437	-30.02	0.0010	8.00	Complies
2462	-30.81	0.0008	8.00	Complies

TX CH01

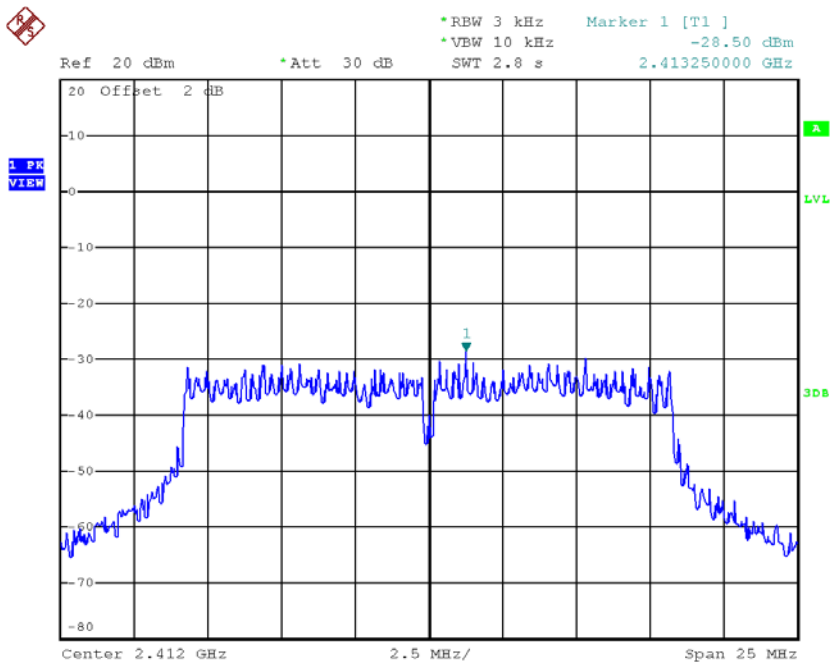


Date: 3.AUG.2017 10:39:52

TX CH06

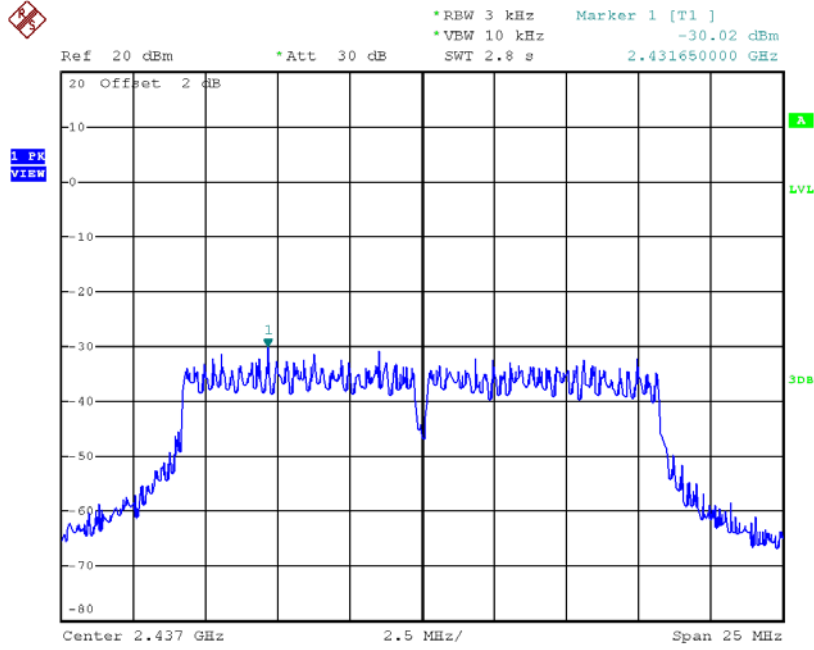

Date: 3.AUG.2017 10:48:52

TX CH11

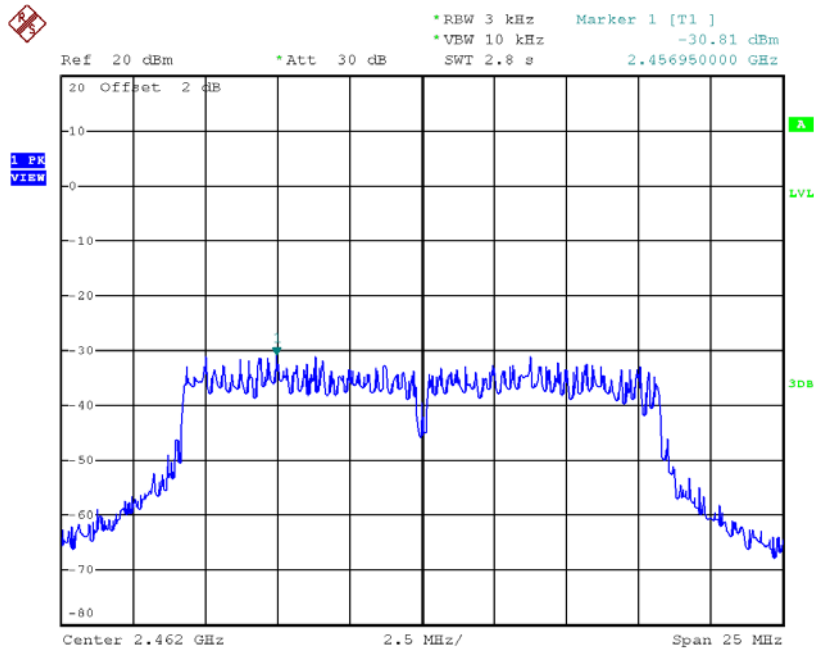


Date: 3.AUG.2017 10:50:08

Test Mode : TX N-20M Mode_CH01/06/11


Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-31.36	0.0007	8.00	Complies
2437	-31.96	0.0006	8.00	Complies
2462	-32.00	0.0006	8.00	Complies

TX CH01

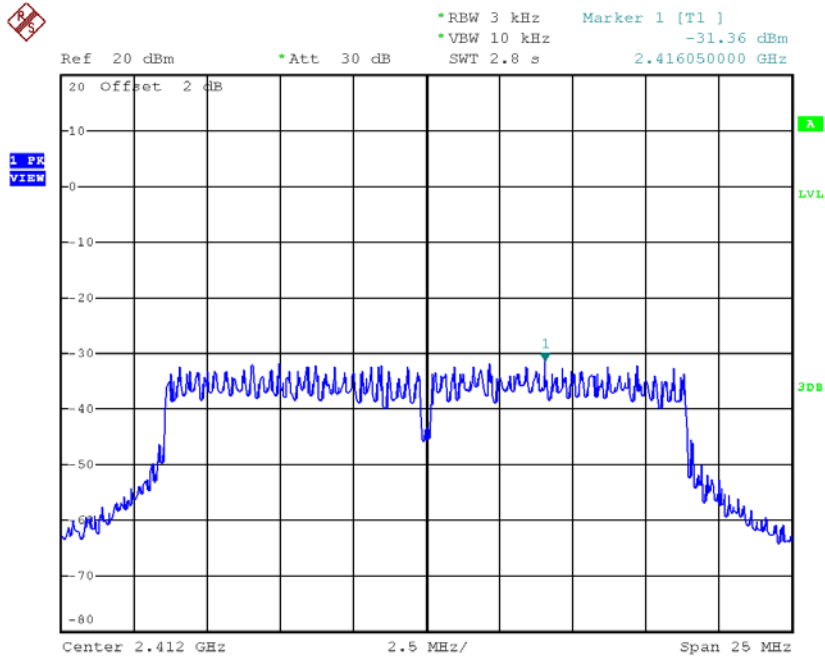


Date: 3.AUG.2017 10:52:30

TX CH06

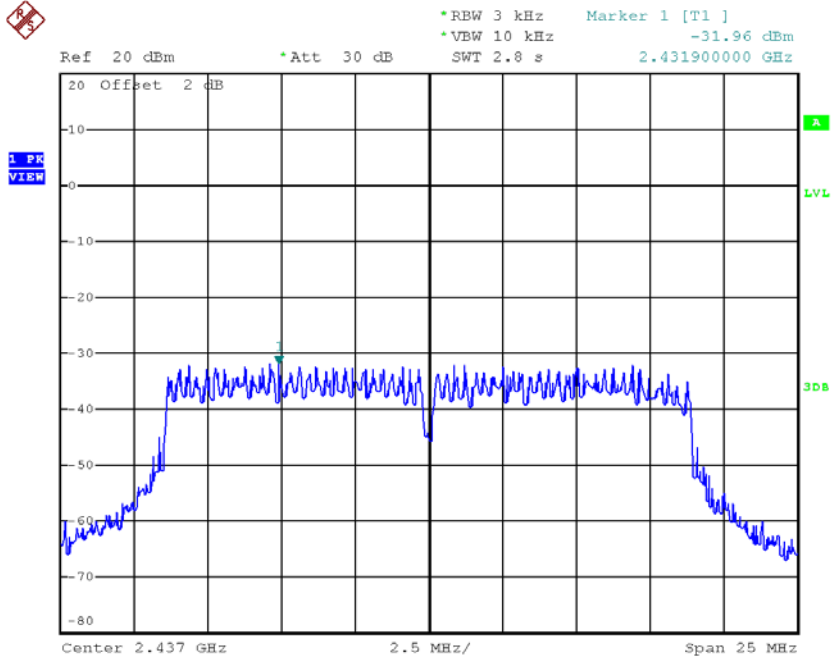

Date: 3.AUG.2017 10:53:25

TX CH11

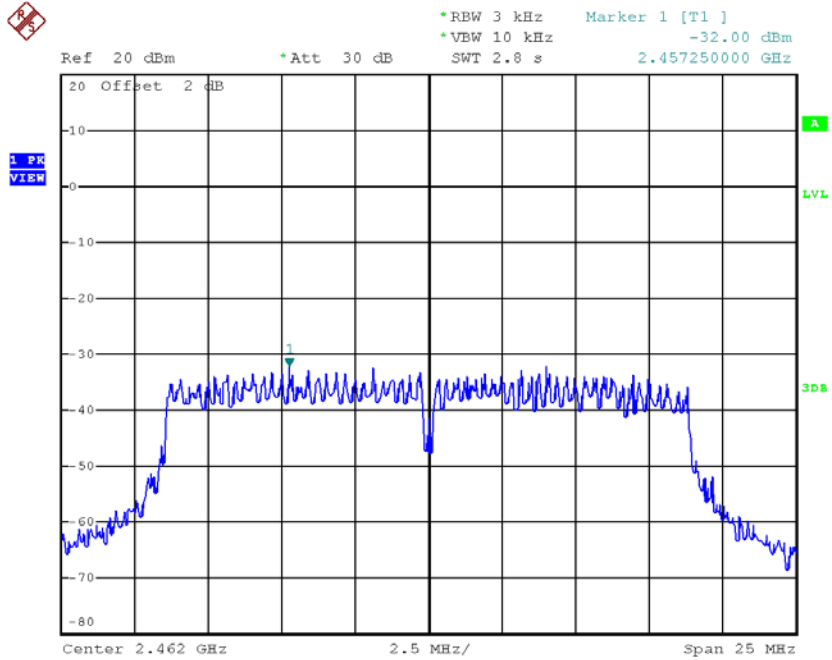

Date: 3.AUG.2017 10:55:01