Test Laboratory: BTL Inc. Date: 2024/7/18

W05_BT 3DH5_CH39_Rear Face_Left Earphone_0mm

DUT: Earphone;

Communication System: UID 0, BT (0); Frequency: 2441 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): f = 2441 MHz; σ = 1.853 S/m; ε_r = 37.946; ρ = 1000 kg/m^3
Ambient Temperature：23.1 ℃; Liquid Temperature：22.3 ℃

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(7.51, 7.27, 7.34) @ 2441 MHz; Calibrated: 2024/4/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1717; Calibrated: 2024/4/18
- Phantom: SAM Right v5.0; Type: QD000P40CC; Serial: TP:1469
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (10x12x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.135 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 7.417 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.187 W/kg
SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.053 W/kg
Maximum value of SAR (measured) = 0.150 W/kg

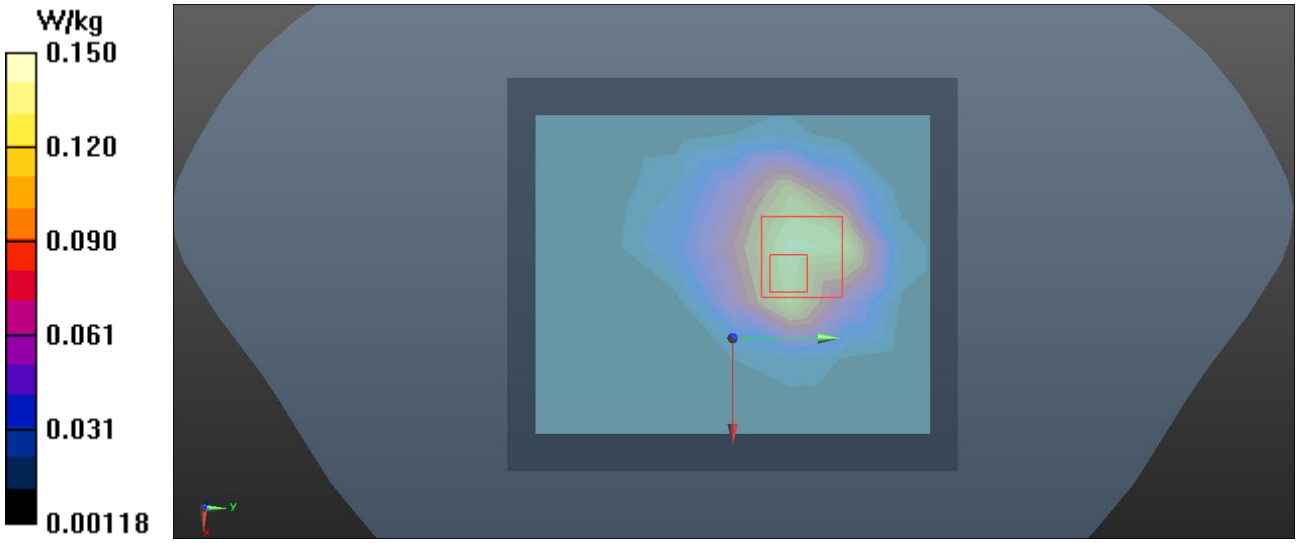

Test Laboratory: BTL Inc. Date: 2024/7/18

W13_BT BLE_CH39_Rear Face_Left Earphone_0mm

DUT: Earphone;

Communication System: UID 10670 - AAA, Bluetooth Low Energy; Frequency: 2480 MHz; Duty Cycle: 1:1
Medium parameters used: f = 2480 MHz; σ = 1.885 S/m; ε_r = 37.936; ρ = 1000 kg/m^3
Ambient Temperature：23.1 ℃; Liquid Temperature：22.3 ℃

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(7.51, 7.27, 7.34) @ 2480 MHz; Calibrated: 2024/4/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1717; Calibrated: 2024/4/18
- Phantom: SAM Right v5.0; Type: QD000P40CC; Serial: TP:1469
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (10x12x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.0459 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.201 V/m; Power Drift = 0.16 dB
Peak SAR (extrapolated) = 0.0620 W/kg
SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.017 W/kg
Maximum value of SAR (measured) = 0.0505 W/kg