


Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	-1.61	0.65	-0.96	28.32
CH159	5795	-1.47	0.65	-0.82	28.32

TX CH151

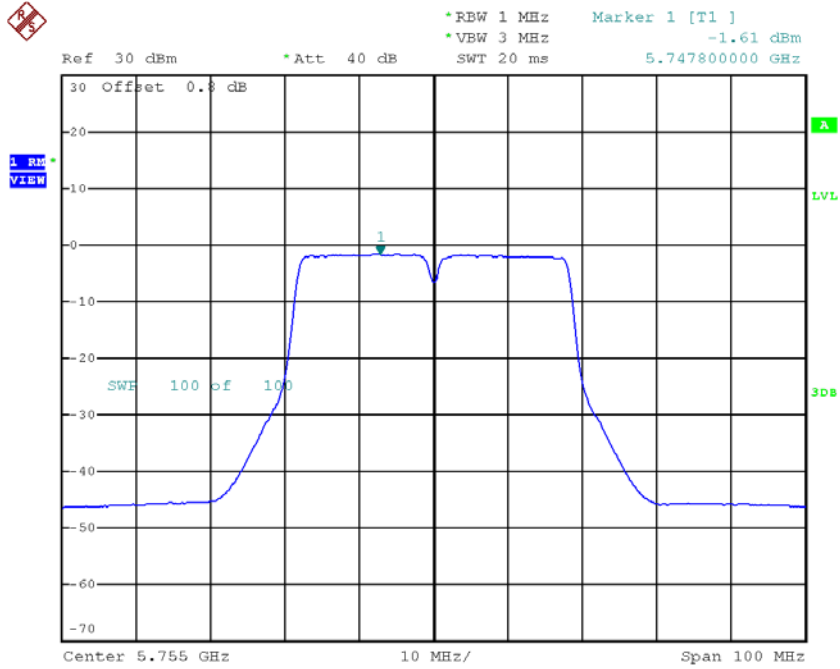

Date: 19.JUL.2018 19:05:46

TX CH159

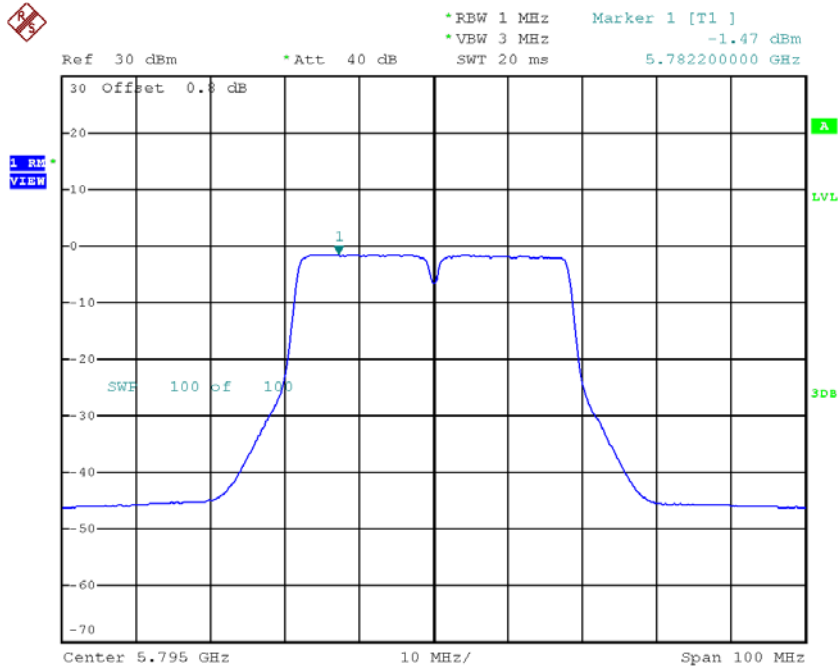

Date: 19.JUL.2018 19:07:01


Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	1.67	28.32
CH159	5795	1.83	28.32

Test Mode: UNII-3/ TX AC80 Mode_CH155_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH155	5775	-5.79	1.25	-4.54	28.32

TX CH155

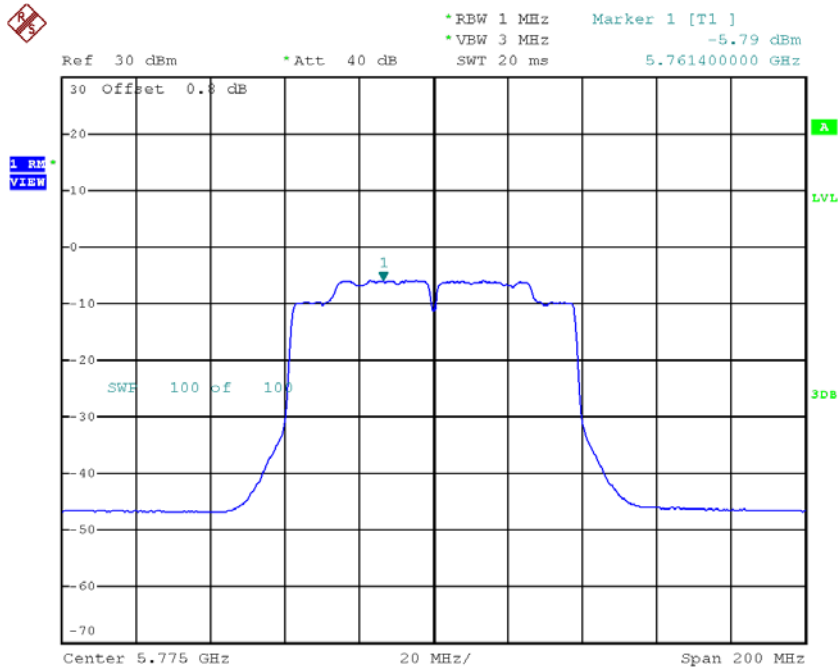


Date: 20.JUL.2018 09:35:33

Test Mode: UNII-3/ TX AC80 Mode_CH155_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH155	5775	-5.07	1.25	-3.82	28.32

TX CH155

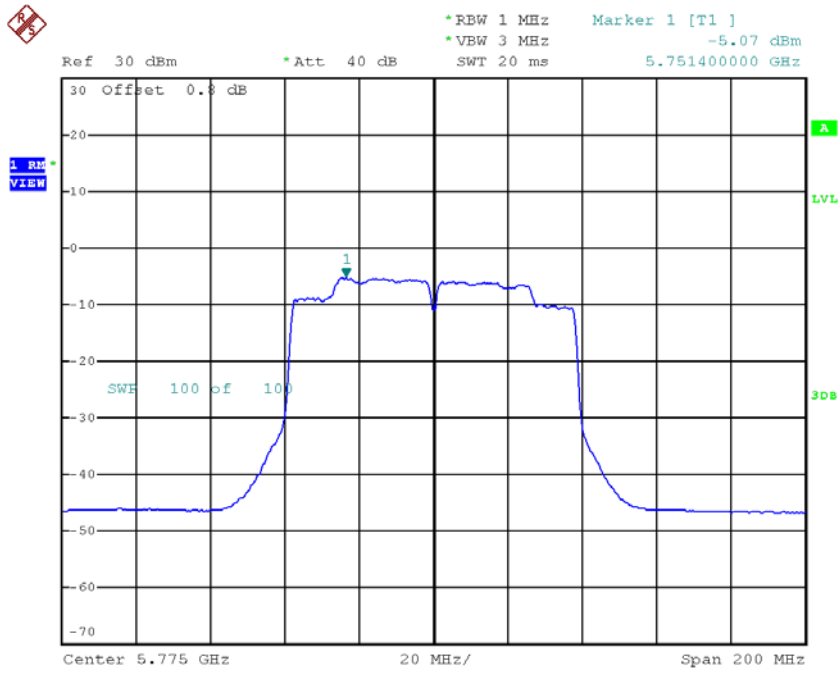

Date: 20.JUL.2018 09:24:25

Test Mode: UNII-3/ TX AC80 Mode_CH155_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH155	5775	-1.16	28.32

APPENDIX H - FREQUENCY STABILITY

Test Mode:	UNII-1
------------	--------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5180.0000
132	5180.0100
120	5180.0120
108	5180.0120
Max. Deviation (MHz)	0.0120
Max. Deviation (ppm)	2.3166

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5180.0000
0	5180.0140
10	5180.0140
20	5180.0140
30	5180.0144
40	5180.0144
Max. Deviation (MHz)	0.0144
Max. Deviation (ppm)	2.7799

Test Mode:	UNII-2A
------------	---------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5260.0000
132	5260.0140
120	5260.0144
108	5260.0152
Max. Deviation (MHz)	0.0152
Max. Deviation (ppm)	2.8897

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5260.0000
0	5260.0140
10	5260.0140
20	5260.0140
30	5260.0140
40	5260.0140
Max. Deviation (MHz)	0.0140
Max. Deviation (ppm)	2.6616

Test Mode:	UNII-2C
------------	---------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5500.0000
132	5500.0080
120	5500.0100
108	5500.0096
Max. Deviation (MHz)	0.0100
Max. Deviation (ppm)	1.8182

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5500.0000
0	5500.0128
10	5500.0128
20	5500.0128
30	5500.0128
40	5500.0128
Max. Deviation (MHz)	0.0128
Max. Deviation (ppm)	2.3273

Test Mode:	UNII-3
------------	--------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5745.0000
132	5745.0132
120	5745.0136
108	5745.0136
Max. Deviation (MHz)	0.0136
Max. Deviation (ppm)	2.3673

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5745.0000
0	5745.0136
10	5745.0156
20	5745.0156
30	5745.0156
40	5745.0156
Max. Deviation (MHz)	0.0156
Max. Deviation (ppm)	2.7154