

Test Laboratory: BTL Inc.

Date: 2023/12/18

W07_802.11b_CH7_Back of Keyboard_0cm_Ant Main_MB 2

DUT: Note Book;

Communication System: UID 10415 - AAA, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle);
Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.837$ S/m; $\epsilon_r = 39.761$; $\rho = 1000$ kg/m³


Ambient Temperature : 22.5 °C; Liquid Temperature : 22.3 °C

DASY Configuration:

- Probe:EX3DV4-SN7693;ConvF(8.32,8.32,8.32) @ 2442 MHz; Calibrated: 2023/10/31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1717; Calibrated: 2023/4/10
- Phantom: ELI V5.0; Type: QD OVA 001 BB; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (10x13x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.19 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 1.90 W/kg
SAR(1 g) = 0.885 W/kg; SAR(10 g) = 0.409 W/kg
Maximum value of SAR (measured) = 1.51 W/kg

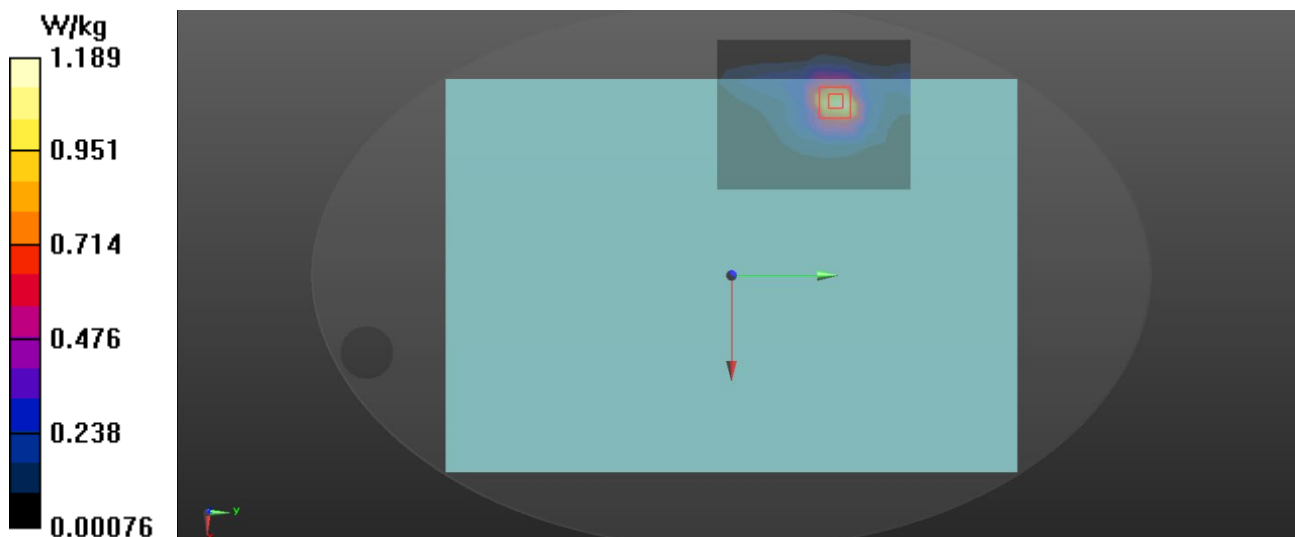

Test Laboratory: BTL Inc.

Date: 2023/12/18

W15_802.11b_CH11_Back of Keyboard_0cm_Ant Aux_MB 2

DUT: Note Book;

Communication System: UID 10415 - AAA, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle);
Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.858$ S/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³


Ambient Temperature : 22.5 °C; Liquid Temperature : 22.3 °C

DASY Configuration:

- Probe:EX3DV4-SN7693;ConvF(8.32,8.32,8.32) @ 2462 MHz; Calibrated: 2023/10/31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1717; Calibrated: 2023/4/10
- Phantom: ELI V5.0; Type: QD OVA 001 BB; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (10x13x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.10 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 1.66 W/kg
SAR(1 g) = 0.757 W/kg; SAR(10 g) = 0.347 W/kg
Maximum value of SAR (measured) = 1.32 W/kg

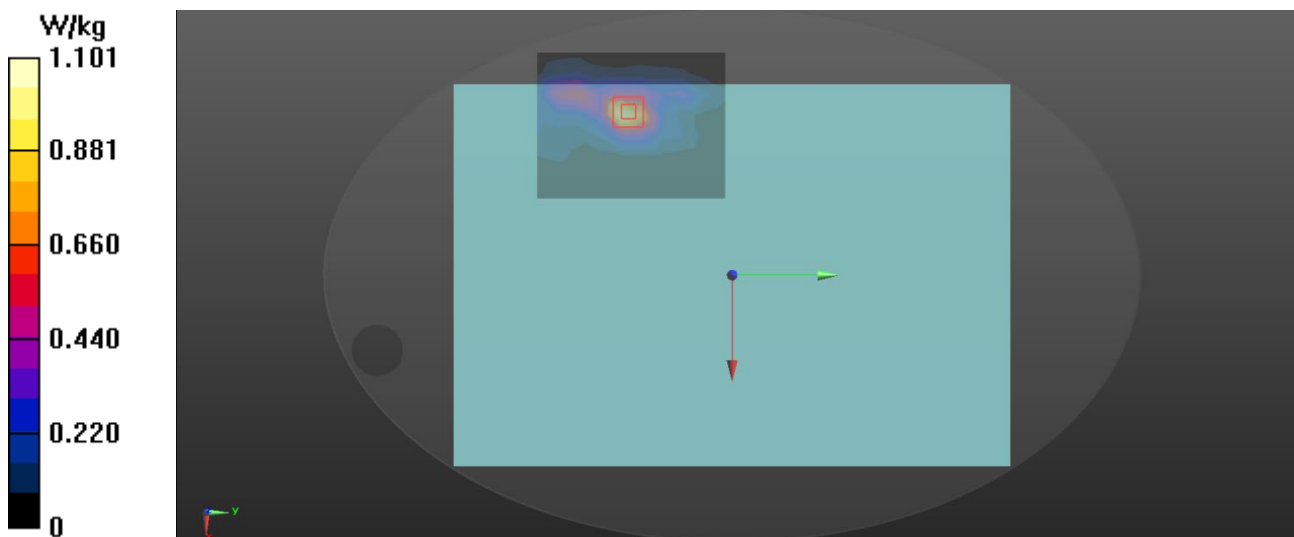

Test Laboratory: BTL Inc.

Date: 2023/12/18

B05_BT DH5_CH0_Back of Keyboard_0cm_Ant Main_MB 2**DUT: Note Book;**


Communication System: UID 10670 - AAA, Bluetooth Low Energy; Frequency: 2402 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.795$ S/m; $\epsilon_r = 39.855$; $\rho = 1000$ kg/m³
Ambient Temperature : 22.5 °C; Liquid Temperature : 22.3 °C

DASY Configuration:

- Probe:EX3DV4-SN7693;ConvF(8.32,8.32,8.32) @ 2402 MHz; Calibrated: 2023/10/31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2023/4/10
- Phantom: ELI V5.0; Type: QD OVA 001 BB; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (10x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.166 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.304 W/kg
SAR(1 g) = 0.141 W/kg; SAR(10 g) = 0.065 W/kg
Maximum value of SAR (measured) = 0.243 W/kg

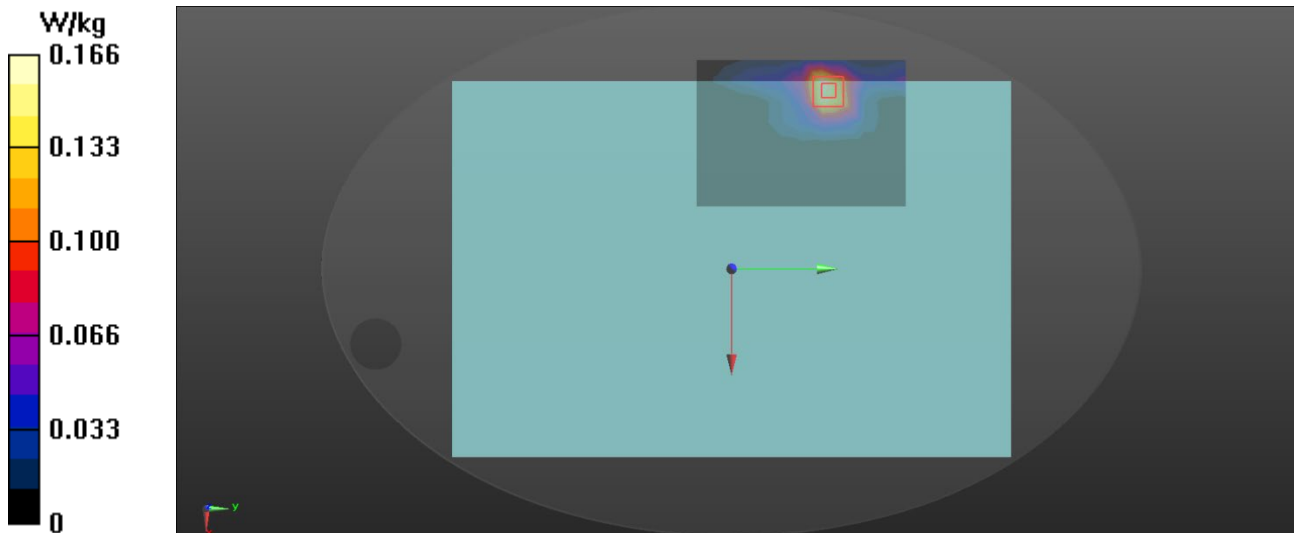

Test Laboratory: BTL Inc.

Date: 2023/12/19

W20_802.11n HT20_CH36_Back of Keyboard_0cm_Ant Main_MB 2

DUT: Note Book;

Communication System: UID 10591 - AAB, IEEE 802.11n (HT Mixed, 20MHz, MCS0, 99pc duty cycle); Frequency: 5180 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.671 \text{ S/m}$; $\epsilon_r = 36.566$; $\rho = 1000 \text{ kg/m}^3$


Ambient Temperature : $22.7 \text{ }^\circ\text{C}$; Liquid Temperature : $22.2 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe:EX3DV4-SN7544;ConvF(5.35,5.35,5.35) @ 5180 MHz; Calibrated: 2023/2/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1423; Calibrated: 2023/3/17
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1128
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (8x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 1.82 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 0 V/m ; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 3.39 W/kg
SAR(1 g) = 0.911 W/kg ; SAR(10 g) = 0.316 W/kg
Maximum value of SAR (measured) = 2.04 W/kg

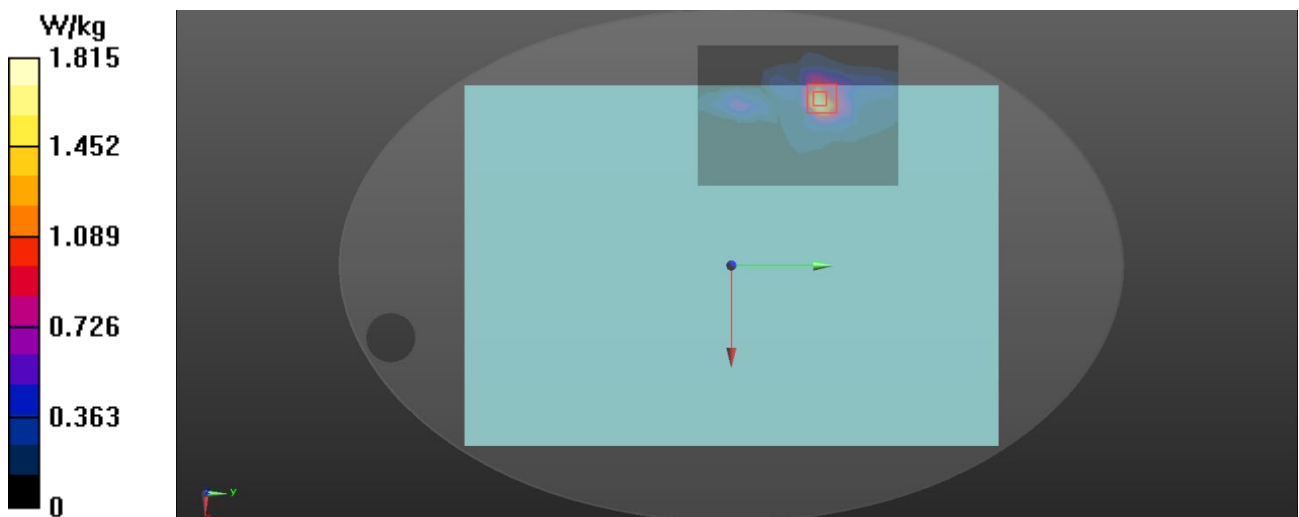

Test Laboratory: BTL Inc.

Date: 2023/12/19

W26_802.11n HT20_CH48_Back of Keyboard_0cm_Ant Aux_MB 2

DUT: Note Book;

Communication System: UID 10591 - AAB, IEEE 802.11n (HT Mixed, 20MHz, MCS0, 99pc duty cycle); Frequency: 5240 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5240$ MHz; $\sigma = 4.749$ S/m; $\epsilon_r = 36.389$; $\rho = 1000$ kg/m³


Ambient Temperature : 22.7 °C; Liquid Temperature : 22.2 °C

DASY Configuration:

- Probe:EX3DV4-SN7544; ConvF(5.35, 5.35, 5.35) @ 5240 MHz;Calibrated: 2023/2/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = 1.0, 23.0
- Electronics: DAE4 Sn1423; Calibrated: 2023/3/17
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1128
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (8x11x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.59 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 3.32 W/kg
SAR(1 g) = 0.848 W/kg; SAR(10 g) = 0.294 W/kg
Maximum value of SAR (measured) = 1.74 W/kg

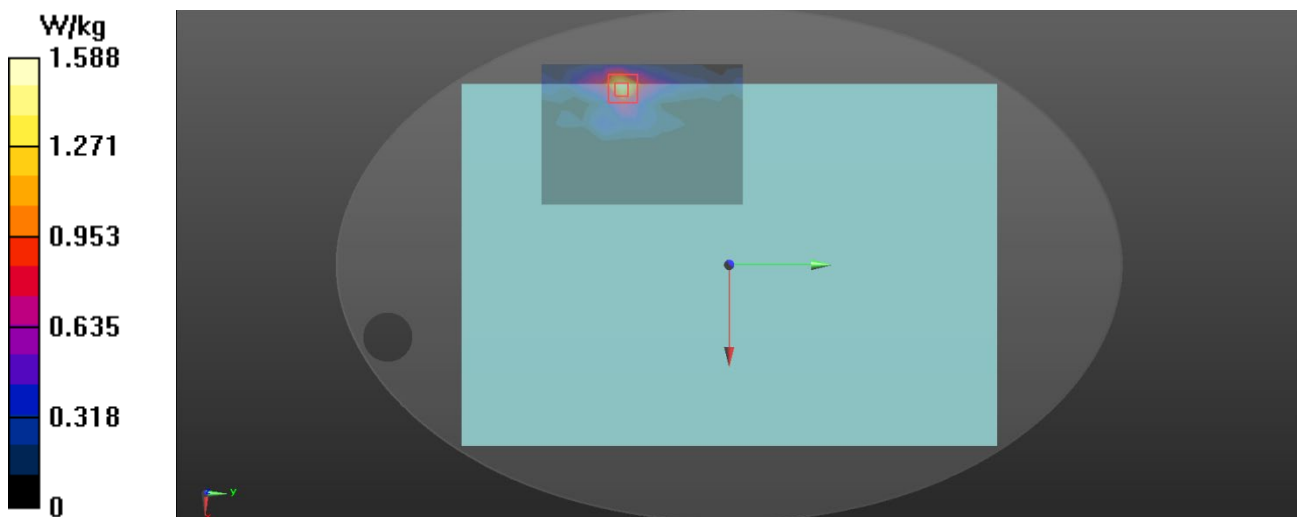

Test Laboratory: BTL Inc.

Date: 2023/12/19

W32_802.11n HT40_CH118_Back of Keyboard_0cm_Ant Main_MB 2

DUT: Note Book;

Communication System: UID 10599 - AAB, IEEE 802.11n (HT Mixed, 40MHz, MCS0, 99pc duty cycle); Frequency: 5590 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5590$ MHz; $\sigma = 5.161$ S/m; $\epsilon_r = 35.592$; $\rho = 1000$ kg/m³


Ambient Temperature : 22.7 °C; Liquid Temperature : 22.2 °C

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(4.8, 4.8, 4.8) @ 5590 MHz; Calibrated: 2023/2/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1423; Calibrated: 2023/3/17
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1128
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (8x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 1.10 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 3.37 W/kg
SAR(1 g) = 0.799 W/kg; SAR(10 g) = 0.279 W/kg
Maximum value of SAR (measured) = 1.95 W/kg

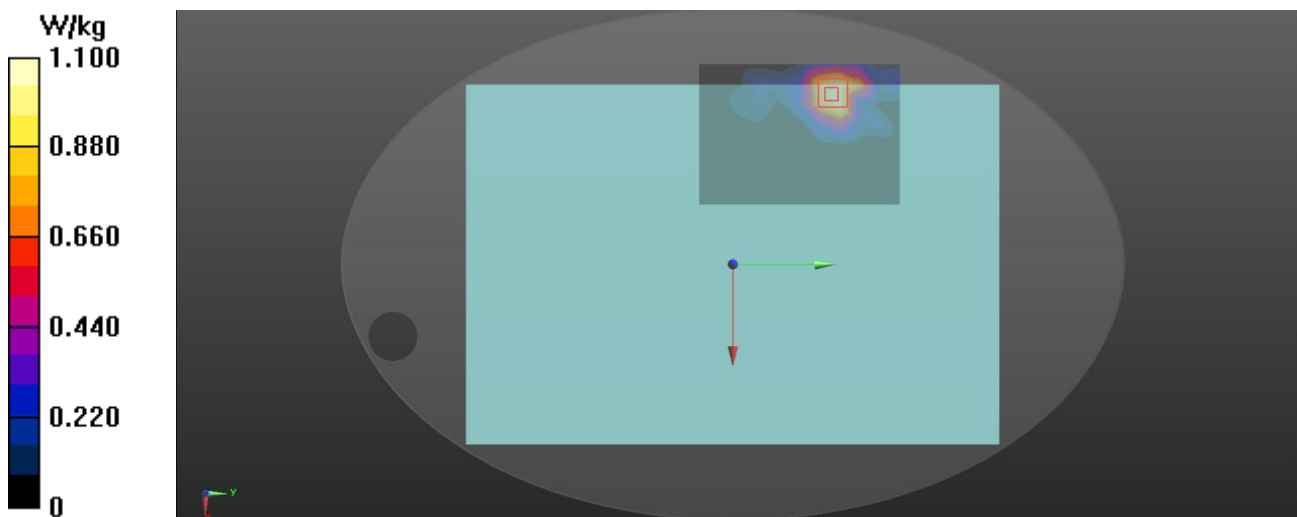

Test Laboratory: BTL Inc.

Date: 2023/12/19

W38_802.11n HT40_CH118_Back of Keyboard_0cm_Ant Aux_MB 2

DUT: Note Book;

Communication System: UID 10599 - AAB, IEEE 802.11n (HT Mixed, 40MHz, MCS0, 99pc duty cycle); Frequency: 5590 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5590 \text{ MHz}$; $\sigma = 5.161 \text{ S/m}$; $\epsilon_r = 35.592$; $\rho = 1000 \text{ kg/m}^3$


Ambient Temperature : 22.7 °C; Liquid Temperature : 22.2 °C

DASY Configuration:

- Probe:EX3DV4-SN7544; ConvF(4.8, 4.8, 4.8) @ 5590 MHz; Calibrated: 2023/2/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1423; Calibrated: 2023/3/17
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1128
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (8x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 1.30 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 3.03 W/kg
SAR(1 g) = 0.712 W/kg; SAR(10 g) = 0.241 W/kg
Maximum value of SAR (measured) = 1.56 W/kg

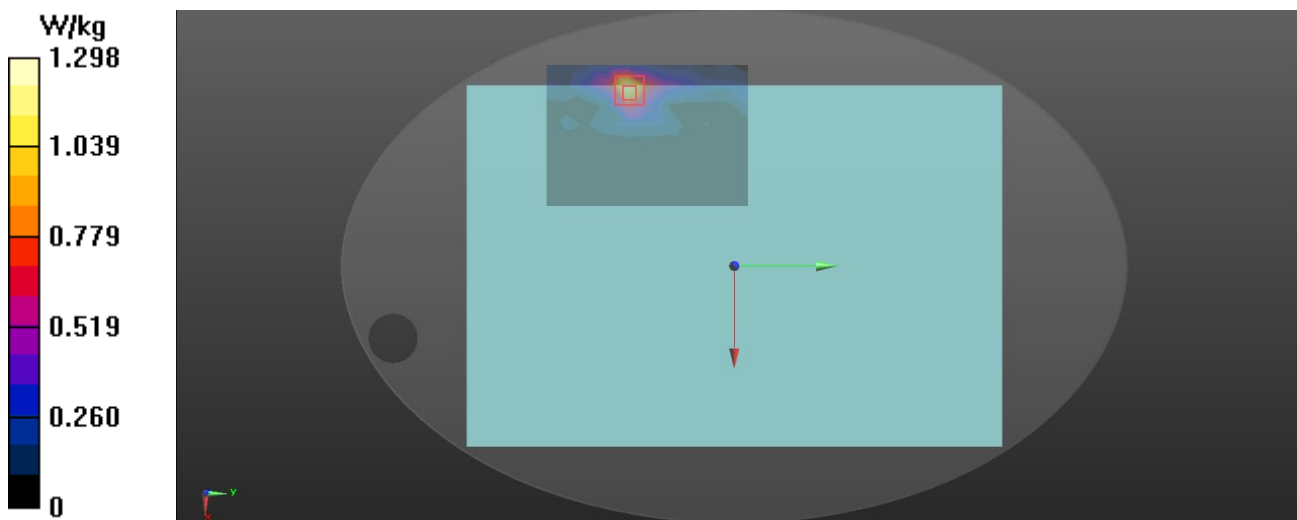

Test Laboratory: BTL Inc.

Date: 2023/12/19

W44_802.11a_CH157_Back of Keyboard_0cm_Ant Main_MB 2

DUT: Note Book;

Communication System: UID 10317 - AAC, IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.397$ S/m; $\epsilon_r = 35.139$; $\rho = 1000$ kg/m³


Ambient Temperature : 22.7 °C; Liquid Temperature : 22.2 °C

DASY Configuration:

- Probe:EX3DV4-SN7544;ConvF(4.87, 4.87, 4.87)@ 5785 MHz; Calibrated: 2023/2/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = 1.0, 23.0
- Electronics: DAE4 Sn1423; Calibrated: 2023/3/17
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1128
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (8x11x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.60 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 2.95 W/kg
SAR(1 g) = 0.730 W/kg; SAR(10 g) = 0.258 W/kg
Maximum value of SAR (measured) = 1.57 W/kg

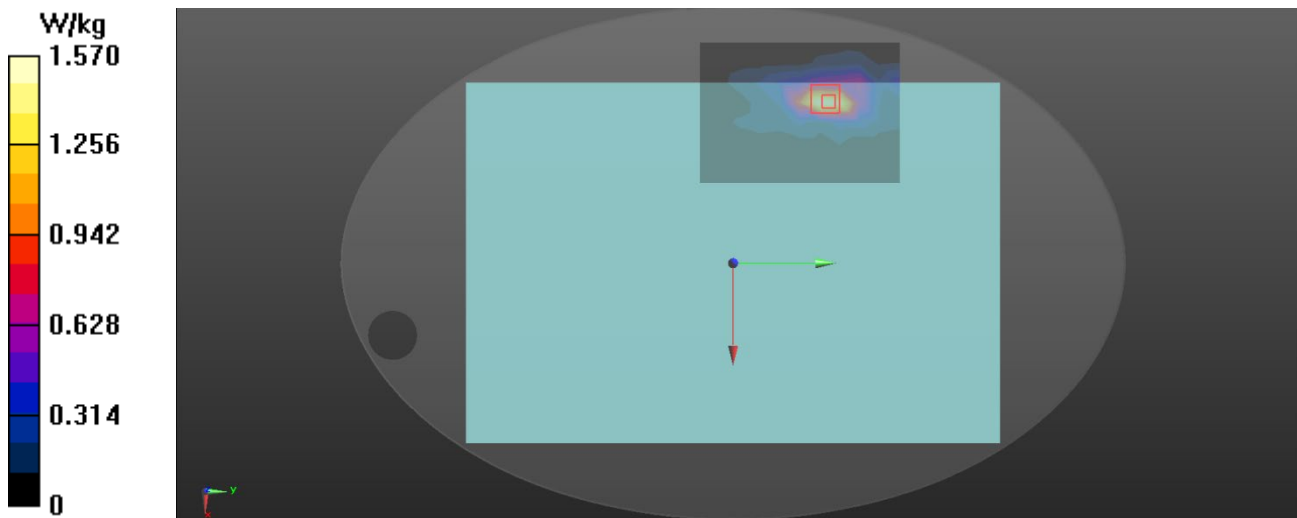

Test Laboratory: BTL Inc.

Date: 2023/12/19

W50_802.11a_CH165_Back of Keyboard_0cm_Ant Aux_MB 2**DUT: Note Book;**


Communication System: UID 0, IEEE 802.11a WiFi 5G(OFDM, 6 Mbps,) (0); Frequency: 5825 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 5.45$ S/m; $\epsilon_r = 35.042$; $\rho = 1000$ kg/m³
Ambient Temperature : 22.7 °C; Liquid Temperature : 22.2 °C

DASY Configuration:

- Probe:EX3DV4-SN7544;ConvF(4.87, 4.87, 4.87) @ 5825 MHz; Calibrated: 2023/2/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1423; Calibrated: 2023/3/17
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1128
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (8x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 1.08 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 3.33 W/kg
SAR(1 g) = 0.699 W/kg; SAR(10 g) = 0.223 W/kg
Maximum value of SAR (measured) = 1.69 W/kg

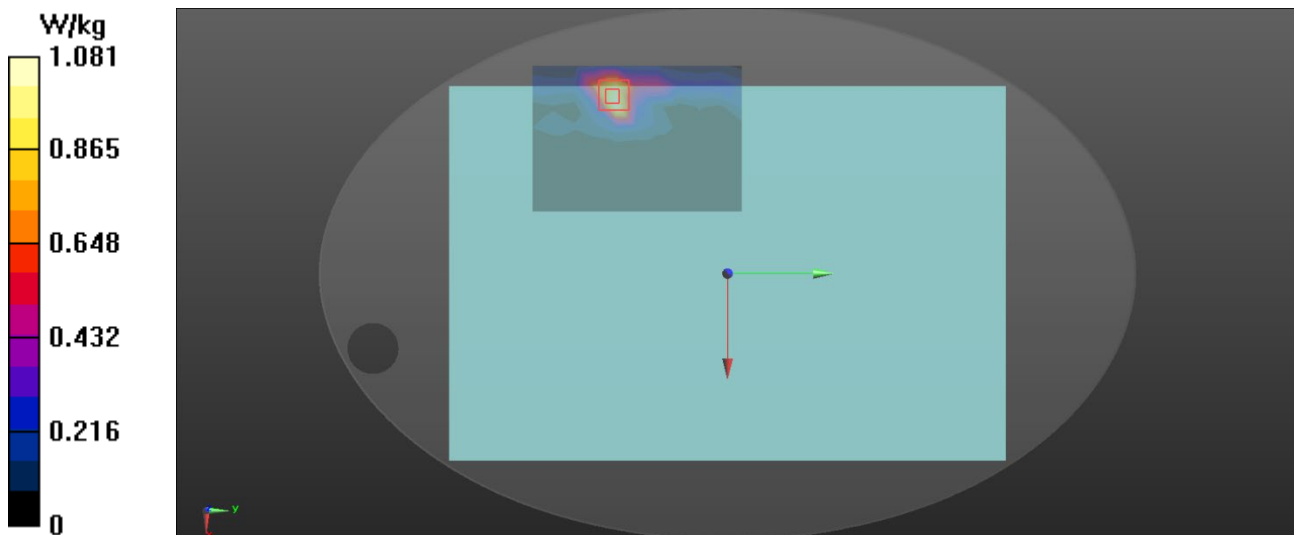

Test Laboratory: BTL Inc.

Date: 2023/12/19

W55_802.11ax HE40_CH167_Back of Keyboard_0cm_Ant Main_MB 2**DUT: Note Book;**

Communication System: UID 10707 - AAA, IEEE 802.11ax (40MHz, MCS0, 99pc duty cycle); Frequency: 5835 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5835$ MHz; $\sigma = 5.463$ S/m; $\epsilon_r = 35.028$; $\rho = 1000$ kg/m³


Ambient Temperature : 22.7 °C; Liquid Temperature : 22.2 °C

DASY Configuration:

- Probe:EX3DV4-SN7544;ConvF(4.87, 4.87, 4.87) @ 5835 MHz; Calibrated: 2023/2/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1423; Calibrated: 2023/3/17
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1128
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (8x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 1.91 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 3.40 W/kg
SAR(1 g) = 0.805 W/kg; SAR(10 g) = 0.290 W/kg
Maximum value of SAR (measured) = 1.94 W/kg

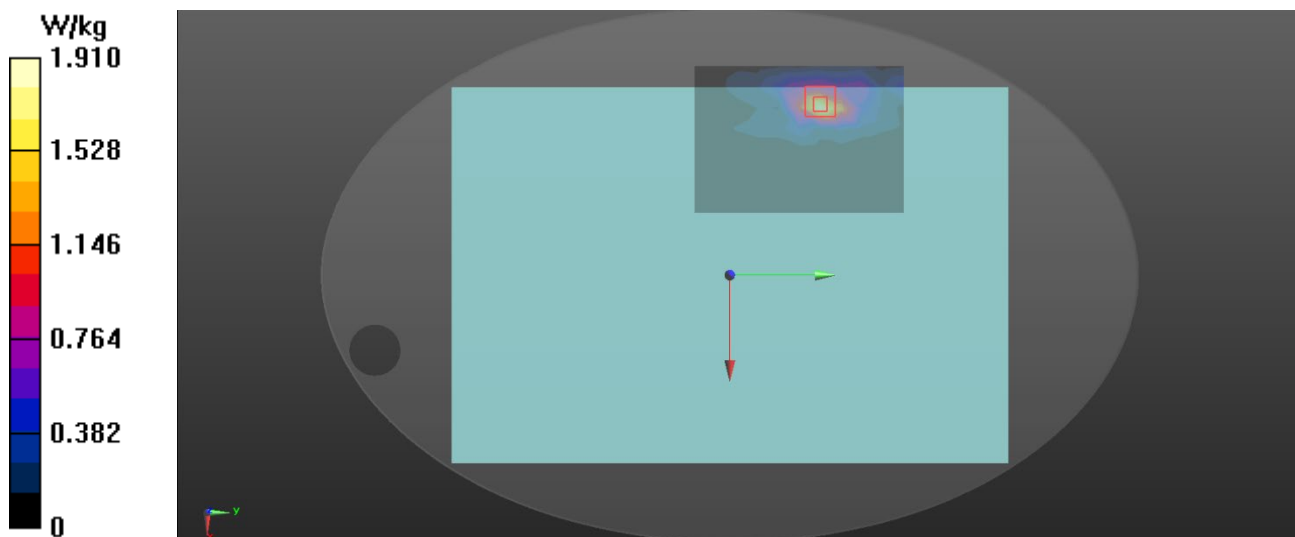

Test Laboratory: BTL Inc.

Date: 2023/12/19

W59_802.11ax HE40_CH175_Back of Keyboard_0cm_Ant Aux_MB 1

DUT: Note Book;

Communication System: UID 10707 - AAA, IEEE 802.11ax (40MHz, MCS0, 99pc duty cycle); Frequency: 5875 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5875$ MHz; $\sigma = 5.489$ S/m; $\epsilon_r = 34.986$; $\rho = 1000$ kg/m³


Ambient Temperature : 22.7 °C; Liquid Temperature : 22.2 °C

DASY Configuration:

- Probe:EX3DV4-SN7544; ConvF(4.87, 4.87, 4.87) @ 5875 MHz; Calibrated: 2023/2/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = 1.0, 23.0
- Electronics: DAE4 Sn1423; Calibrated: 2023/3/17
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1128
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (8x11x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.16 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 3.12 W/kg
SAR(1 g) = 0.679 W/kg; SAR(10 g) = 0.221 W/kg
Maximum value of SAR (measured) = 1.64 W/kg

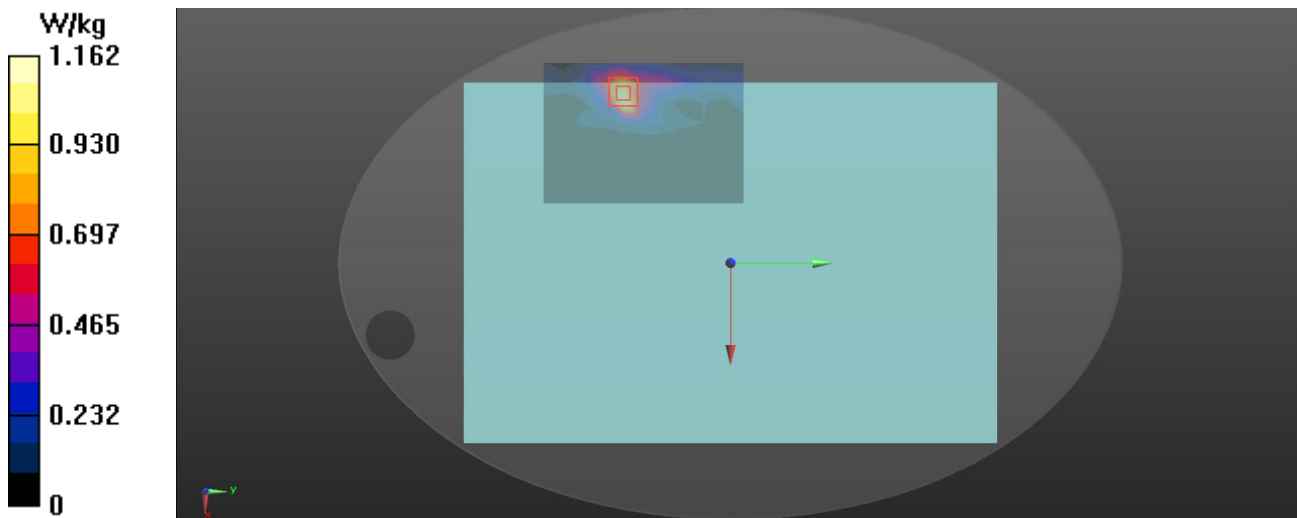

Measurement Report for Device, BACK, U-NII-5, UID 10755 AAC, Channel 93 (6415.0MHz)

Device under Test Properties

Model, Manufacturer Device,	Dimensions [mm] 400.0 x 276.0 x 23.0	IMEI	DUT Type Laptop
---------------------------------------	--	-------------	---------------------------

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 0.00	U-NII-5	WLAN, 10755-AAC	6415.0, 93	5.8	6.08	34.0

Hardware Setup

Phantom Twin-SAM V8.0 (30deg probe tilt) - 2081	TSL, Measured Date HBBL-600-10000	Probe, Calibration Date EX3DV4 - SN7693, 2023-10-31	DAE, Calibration Date DAE4 Sn1717, 2023-04-10
---	---	---	---

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 119.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured


Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-18	2023-12-18
psSAR1g [W/kg]	0.308	0.317
psSAR10g [W/kg]	0.105	0.105
Power Drift [dB]	-0.05	-0.07
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction [dB]	No correction	No correction
M2/M1 [%]		56.3
Dist 3dB Peak [mm]		7.6

Warning(s) / Error(s)

Details Area Scan
Warning(s)
Error(s)

Zoom Scan

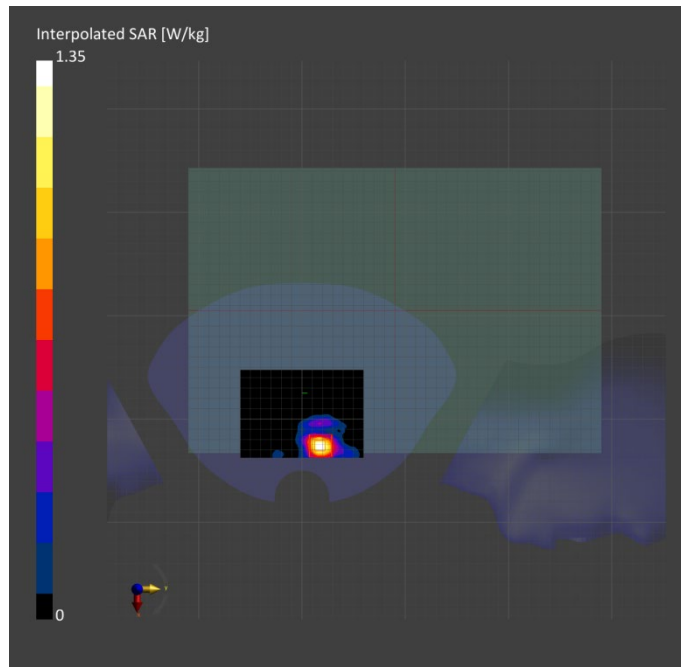

Measurement Report for Device, BACK, U-NII-5, UID 10743 AAC, Channel 31 (6105.0MHz)

Device under Test Properties

Model, Manufacturer Device,	Dimensions [mm] 400.0 x 276.0 x 23.0	IMEI	DUT Type Laptop
---------------------------------------	--	-------------	---------------------------

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 0.00	U-NII-5	WLAN, 10743-AAC	6105.0, 31	5.8	5.35	34.4

Hardware Setup

Phantom Twin-SAM V8.0 (30deg probe tilt) - 2081	TSL, Measured Date HBBL-695-10000	Probe, Calibration Date EX3DV4 - SN7693, 2023-10-31	DAE, Calibration Date DAE4 Sn1423, 2023-03-17
---	---	---	---

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	Y
Surface Detection Scan Method	VMS + 6p Measured	VMS + 6p Measured


Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-18	2023-12-18
psSAR1g [W/kg]	0.255	0.265
psSAR10g [W/kg]	0.081	0.082
Power Drift [dB]	0.06	0.09
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		56.9
Dist 3dB Peak [mm]		6.3

Warning(s) / Error(s)

Details	Area Scan
Warning(s)	
Error(s)	

Zoom Scan

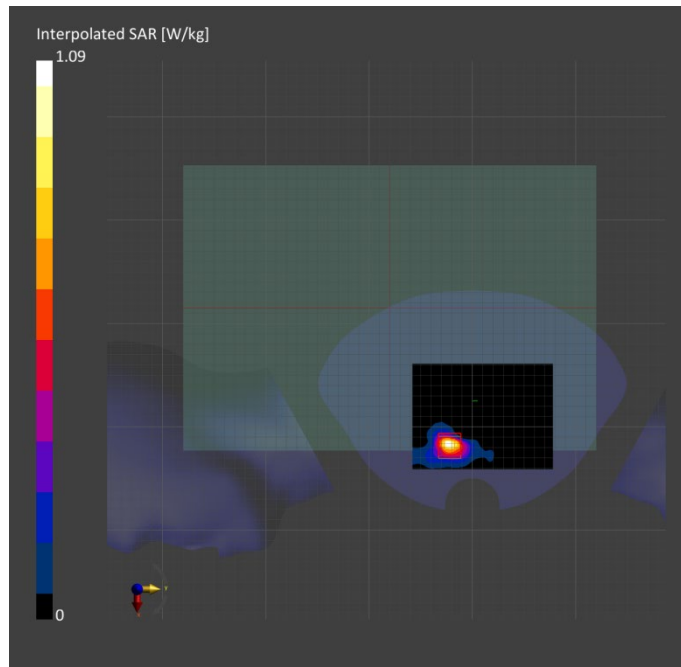

Measurement Report for Device, BACK, U-NII-5, UID 10743 AAC, Channel 95 (6425.0MHz)

Device under Test Properties

Model, Manufacturer Device	Dimensions [mm] 400.0 x 276.0 x 23.0	IMEI	DUT Type Laptop
-------------------------------	---	------	--------------------

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	BACK, 2.00	U-NII-5	WLAN, 10743-AAC	6425.0, 95	1.0

Hardware Setup

Phantom mmWave- xxxx	Medium ---Air	Probe, Calibration Date EUmmWV4 - SN9626_F1-55GHz, 2023-05-17	DAE, Calibration Date DAE4 Sn1423, 2023-03-17
-------------------------	------------------	---	--

Scan Setup


	5G Scan	
Grid Extents [mm]	25.0 x	50.0
Grid Steps [lambda]	0.0625 x	0.0625
Sensor Surface [mm]	2.0	
MAIA	Y	

Measurement Results

	5G Scan
Date	2023-12-18
Avg.Area [cm ²]	4.00
psPDn+ [W/m ²]	3.31
psPDtot+ [W/m ²]	4.2
psPDmod+ [W/m ²]	4.61
E _{max} [V/m]	58.7
Power Drift [dB]	-0.05

Warning(s) / Error(s)

Details	5G Scan
Warning(s)	
Error(s)	

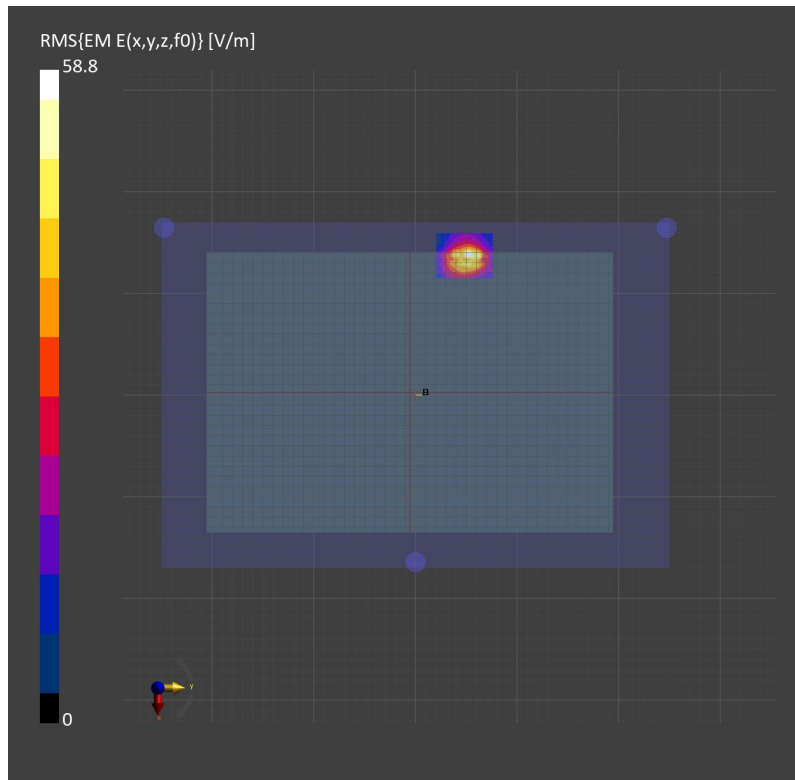

Measurement Report for Device, BACK, U-NII-5, UID 10743 AAC, Channel 31 (6105.0MHz)

Device under Test Properties

Model, Manufacturer Device	Dimensions [mm] 400.0 x 276.0 x 23.0	IMEI	DUT Type Laptop
-------------------------------	---	------	--------------------

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	BACK, 2.00	U-NII-5	WLAN, 10743-AAC	6105.0, 31	1.0

Hardware Setup

Phantom mmWave- xxxx	Medium ---Air	Probe, Calibration Date EUmmWV4 - SN9626_F1-55GHz, 2023-05-17	DAE, Calibration Date DAE4 Sn1423, 2023-03-17
-------------------------	------------------	---	--

Scan Setup

	5G Scan	
Grid Extents [mm]	25.0 x	75.0
Grid Steps [lambda]	0.0625 x	0.0625
Sensor Surface [mm]	2.0	
MAIA	Y	

Measurement Results

	5G Scan
Date	2023-12-18
Avg.Area [cm ²]	4.00
psPDn+ [W/m ²]	3.09
psPDtot+ [W/m ²]	4.62
psPDmod+ [W/m ²]	4.98
E _{max} [V/m]	62.2
Power Drift [dB]	0.03

Warning(s) / Error(s)

Details	5G Scan
Warning(s)	
Error(s)	

