

802.11n-HT40

Channel 38

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17789.900	41.68	-25.50	46.66	20.52	54.00	12.32	V
17948.300	41.64	-25.50	46.66	20.48	54.00	12.36	H
13333.800	37.63	-29.49	39.71	27.41	54.00	16.37	H
13328.900	37.60	-29.49	39.71	27.38	54.00	16.40	H
5149.900	49.24	-27.61	33.67	43.18	54.00	4.76	H
5149.500	49.10	-27.61	33.67	43.04	54.00	4.90	H

Channel 46

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17771.800	41.83	-25.50	46.66	20.67	54.00	12.17	H
17747.500	41.63	-25.50	46.66	20.47	54.00	12.37	H
14494.900	37.90	-28.59	42.46	24.03	54.00	16.10	V
13369.000	37.76	-29.49	39.71	27.54	54.00	16.24	V
11948.400	36.15	-31.48	39.09	28.54	54.00	17.85	V
11922.000	36.10	-31.48	39.09	28.49	54.00	17.90	V

Channel 54

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17834.500	41.84	-25.50	46.66	20.68	54.00	12.16	V
17973.000	41.71	-25.50	46.66	20.55	54.00	12.29	V
13327.200	38.00	-29.49	39.71	27.78	54.00	16.00	V
13343.100	37.69	-29.49	39.71	27.47	54.00	16.31	V
11997.900	36.46	-31.48	39.09	28.85	54.00	17.54	H
11944.500	36.13	-31.48	39.09	28.52	54.00	17.87	V

Channel 62

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17965.300	41.73	-25.50	46.66	20.57	54.00	12.27	V
17991.800	41.72	-25.50	46.66	20.56	54.00	12.28	H
14482.200	37.78	-28.59	42.46	23.91	54.00	16.22	V
14486.000	37.75	-28.59	42.46	23.88	54.00	16.25	H
5350.100	47.15	-27.43	34.01	40.57	54.00	6.85	H
5350.700	47.00	-27.43	34.01	40.42	54.00	7.00	H

Channel 102

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17968.100	41.90	-25.50	46.66	20.74	54.00	12.10	V
17814.100	41.68	-25.50	46.66	20.52	54.00	12.32	V
14498.700	37.68	-28.59	42.46	23.81	54.00	16.32	H
13338.800	37.60	-29.49	39.71	27.38	54.00	16.40	H
5459.700	43.49	-27.18	34.17	36.50	54.00	10.51	H
5452.900	43.11	-27.18	34.17	36.12	54.00	10.89	H

Channel 118

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17973.000	41.74	-25.50	46.66	20.58	54.00	12.26	V
17980.200	41.74	-25.50	46.66	20.58	54.00	12.26	H
13338.800	37.84	-29.49	39.71	27.62	54.00	16.16	V
13346.500	37.68	-29.49	39.71	27.46	54.00	16.32	V
11939.000	35.86	-31.48	39.09	28.25	54.00	18.14	V
11528.700	35.85	-32.26	38.84	29.28	54.00	18.15	V

Channel 134

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17756.300	41.93	-25.50	46.66	20.77	54.00	12.07	V
17702.500	41.70	-25.74	45.95	21.49	54.00	12.30	H
13347.500	37.94	-29.49	39.71	27.72	54.00	16.06	H
13347.000	37.92	-29.49	39.71	27.70	54.00	16.08	H
11934.600	36.10	-31.48	39.09	28.49	54.00	17.90	V
11991.800	35.95	-31.48	39.09	28.34	54.00	18.05	V

Channel 142

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17996.200	41.92	-25.50	46.66	20.76	54.00	12.08	V
17997.800	41.84	-25.50	46.66	20.68	54.00	12.16	H
13366.200	37.85	-29.49	39.71	27.63	54.00	16.15	H
14494.300	37.75	-28.59	42.46	23.88	54.00	16.25	H
11939.000	36.33	-31.48	39.09	28.72	54.00	17.67	V

11048.500	36.02	-32.49	38.72	29.78	54.00	17.98	V
-----------	-------	--------	-------	-------	-------	-------	---

802.11ac-HT20

Channel 36

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17750.300	41.56	-25.50	46.66	20.40	54.00	12.44	H
17777.800	41.54	-25.50	46.66	20.38	54.00	12.46	V
13348.600	37.64	-29.49	39.71	27.42	54.00	16.36	V
13337.100	37.59	-29.49	39.71	27.37	54.00	16.41	H
5150.000	43.38	-27.61	33.67	37.32	54.00	10.62	H
5149.800	43.15	-27.61	33.67	37.09	54.00	10.85	H

Channel 40

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17807.000	41.68	-25.50	46.66	20.52	54.00	12.32	H
17983.000	41.57	-25.50	46.66	20.41	54.00	12.43	V
13336.500	37.77	-29.49	39.71	27.55	54.00	16.23	H
13333.800	37.69	-29.49	39.71	27.47	54.00	16.31	H
11935.700	36.08	-31.48	39.09	28.47	54.00	17.92	H
11980.800	36.07	-31.48	39.09	28.46	54.00	17.93	H

Channel 48

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17982.400	41.73	-25.50	46.66	20.57	54.00	12.27	H
17952.200	41.71	-25.50	46.66	20.55	54.00	12.29	H
13354.700	37.86	-29.49	39.71	27.64	54.00	16.14	V
14485.500	37.78	-28.59	42.46	23.91	54.00	16.22	V
11935.700	36.19	-31.48	39.09	28.58	54.00	17.81	V
11051.900	36.15	-32.49	38.72	29.91	54.00	17.85	H

Channel 52

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17992.800	41.73	-25.50	46.66	20.57	54.00	12.27	H
17749.200	41.68	-25.50	46.66	20.52	54.00	12.32	V
13352.000	37.81	-29.49	39.71	27.59	54.00	16.19	V
14498.100	37.75	-28.59	42.46	23.88	54.00	16.25	V
11944.000	36.21	-31.48	39.09	28.60	54.00	17.79	H
11951.600	36.21	-31.48	39.09	28.60	54.00	17.79	V

Channel 56

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17863.600	41.85	-25.50	46.66	20.69	54.00	12.15	V
17704.700	41.79	-25.74	45.95	21.58	54.00	12.21	H
14499.800	37.79	-28.59	42.46	23.92	54.00	16.21	V
13360.200	37.75	-29.49	39.71	27.53	54.00	16.25	V
11999.500	36.34	-31.48	39.09	28.73	54.00	17.66	V
11939.000	36.10	-31.48	39.09	28.49	54.00	17.90	V

Channel 64

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17807.500	41.81	-25.50	46.66	20.65	54.00	12.19	V
17797.000	41.74	-25.50	46.66	20.58	54.00	12.26	V
13346.500	37.81	-29.49	39.71	27.59	54.00	16.19	H
13339.300	37.80	-29.49	39.71	27.58	54.00	16.20	H
5350.800	42.80	-27.43	34.01	36.22	54.00	11.20	H
5350.800	42.61	-27.43	34.01	36.03	54.00	11.39	H

Channel 100

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17994.500	41.79	-25.50	46.66	20.63	54.00	12.21	H
17863.600	41.63	-25.50	46.66	20.47	54.00	12.37	V
13351.400	37.67	-29.49	39.71	27.45	54.00	16.33	H
13354.700	37.67	-29.49	39.71	27.45	54.00	16.33	V
5452.300	41.23	-27.18	34.17	34.24	54.00	12.77	V
5447.100	41.20	-27.18	34.17	34.21	54.00	12.80	H

Channel 116

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17793.200	41.73	-25.50	46.66	20.57	54.00	12.27	V
17996.200	41.72	-25.50	46.66	20.56	54.00	12.28	H
14478.900	37.90	-28.59	42.46	24.03	54.00	16.10	H
14494.900	37.75	-28.59	42.46	23.88	54.00	16.25	V
11925.800	36.09	-31.48	39.09	28.48	54.00	17.91	V
11878.500	36.02	-31.85	39.05	28.82	54.00	17.98	H

Channel 140

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17996.200	42.09	-25.50	46.66	20.93	54.00	11.91	V
17778.900	42.05	-25.50	46.66	20.89	54.00	11.95	V
13353.000	38.13	-29.49	39.71	27.91	54.00	15.87	V
13342.600	38.06	-29.49	39.71	27.84	54.00	15.94	V
11997.900	36.44	-31.48	39.09	28.83	54.00	17.56	V
11988.500	36.42	-31.48	39.09	28.81	54.00	17.58	V

Channel 144

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17994.500	41.85	-25.50	46.66	20.69	54.00	12.15	H
17704.700	41.84	-25.74	45.95	21.63	54.00	12.16	V
14496.000	37.89	-28.59	42.46	24.02	54.00	16.11	H
13348.600	37.81	-29.49	39.71	27.59	54.00	16.19	H
11961.000	36.01	-31.48	39.09	28.40	54.00	17.99	V
11853.800	35.99	-31.85	39.05	28.79	54.00	18.01	V

802.11ac-HT40

Channel 38

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17958.200	41.65	-25.50	46.66	20.49	54.00	12.35	V
17721.700	41.64	-25.74	45.95	21.43	54.00	12.36	H
13335.500	37.96	-29.49	39.71	27.74	54.00	16.04	H
14496.500	37.91	-28.59	42.46	24.04	54.00	16.09	V
5149.700	48.40	-27.61	33.67	42.34	54.00	5.60	H
5149.900	48.31	-27.61	33.67	42.25	54.00	5.69	H

Channel 46

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17741.500	41.76	-25.50	46.66	20.60	54.00	12.24	V
17722.800	41.59	-25.74	45.95	21.38	54.00	12.41	V
13349.200	37.83	-29.49	39.71	27.61	54.00	16.17	H
13351.400	37.80	-29.49	39.71	27.58	54.00	16.20	V
11855.400	35.95	-31.85	39.05	28.75	54.00	18.05	V
11538.600	35.92	-32.26	38.84	29.35	54.00	18.08	V

Channel 54

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17730.500	41.89	-25.74	45.95	21.68	54.00	12.11	V
17998.300	41.74	-25.50	46.66	20.58	54.00	12.26	V
14497.600	38.05	-28.59	42.46	24.18	54.00	15.95	H
14499.800	37.75	-28.59	42.46	23.88	54.00	16.25	V
11537.500	36.12	-32.26	38.84	29.55	54.00	17.88	H
11898.300	35.96	-31.85	39.05	28.76	54.00	18.04	V

Channel 62

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17963.200	41.79	-25.50	46.66	20.63	54.00	12.21	H
17783.300	41.67	-25.50	46.66	20.51	54.00	12.33	H
14499.800	37.85	-28.59	42.46	23.98	54.00	16.15	V
13331.600	37.66	-29.49	39.71	27.44	54.00	16.34	V
5350.200	47.43	-27.43	34.01	40.85	54.00	6.57	H
5352.800	47.28	-27.43	34.01	40.70	54.00	6.72	H

Channel 102

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17728.300	41.95	-25.74	45.95	21.74	54.00	12.05	V
17770.700	41.85	-25.50	46.66	20.69	54.00	12.15	H
14484.400	37.85	-28.59	42.46	23.98	54.00	16.15	V
13356.900	37.75	-29.49	39.71	27.53	54.00	16.25	H
5454.400	42.73	-27.18	34.17	35.74	54.00	11.27	H
5459.300	42.59	-27.18	34.17	35.60	54.00	11.41	H

Channel 118

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17940.600	41.68	-25.50	46.66	20.52	54.00	12.32	H
17862.000	41.66	-25.50	46.66	20.50	54.00	12.34	H
13355.800	37.90	-29.49	39.71	27.68	54.00	16.10	V
13346.500	37.78	-29.49	39.71	27.56	54.00	16.22	H
11946.700	36.02	-31.48	39.09	28.41	54.00	17.98	V
11449.000	35.95	-32.26	38.84	29.38	54.00	18.05	V

Channel 134

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17712.900	41.82	-25.74	45.95	21.61	54.00	12.18	H
17974.200	41.72	-25.50	46.66	20.56	54.00	12.28	V
14494.900	37.98	-28.59	42.46	24.11	54.00	16.02	V
13344.800	37.83	-29.49	39.71	27.61	54.00	16.17	H
11923.600	36.36	-31.48	39.09	28.75	54.00	17.64	V
11919.800	35.99	-31.48	39.09	28.38	54.00	18.01	H

Channel 142

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17953.200	41.83	-25.50	46.66	20.67	54.00	12.17	H
17710.700	41.76	-25.74	45.95	21.55	54.00	12.24	H
14487.700	37.87	-28.59	42.46	24.00	54.00	16.13	V
13346.500	37.71	-29.49	39.71	27.49	54.00	16.29	H
10682.800	36.00	-32.77	38.49	30.28	54.00	18.00	H

11940.100	35.99	-31.48	39.09	28.38	54.00	18.01	H
-----------	-------	--------	-------	-------	-------	-------	---

802.11ac-HT80

Channel 42

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17918.600	41.74	-25.50	46.66	20.58	54.00	12.26	H
17948.300	41.63	-25.50	46.66	20.47	54.00	12.37	H
13346.500	37.94	-29.49	39.71	27.72	54.00	16.06	V
13343.100	37.80	-29.49	39.71	27.58	54.00	16.20	V
5143.100	51.13	-27.61	33.67	45.07	54.00	2.87	H
5149.300	50.85	-27.61	33.67	44.79	54.00	3.15	H

Channel 58

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17990.700	41.84	-25.50	46.66	20.68	54.00	12.16	V
17959.300	41.63	-25.50	46.66	20.47	54.00	12.37	H
14494.900	38.14	-28.59	42.46	24.27	54.00	15.86	H
14493.200	37.99	-28.59	42.46	24.12	54.00	16.01	H
5350.000	45.43	-27.43	34.01	38.85	54.00	8.57	H
5350.200	45.26	-27.43	34.01	38.68	54.00	8.74	H

Channel 106

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17954.900	41.92	-25.50	46.66	20.76	54.00	12.08	V
17727.800	41.79	-25.74	45.95	21.58	54.00	12.21	V
13331.600	37.68	-29.49	39.71	27.46	54.00	16.32	H
14499.200	37.68	-28.59	42.46	23.81	54.00	16.32	H
5458.000	43.30	-27.18	34.17	36.31	54.00	10.70	H
5459.100	42.70	-27.18	34.17	35.71	54.00	11.30	H

Channel 122

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17745.300	41.78	-25.50	46.66	20.62	54.00	12.22	H
17980.800	41.74	-25.50	46.66	20.58	54.00	12.26	H
13355.800	37.87	-29.49	39.71	27.65	54.00	16.13	V
13339.300	37.79	-29.49	39.71	27.57	54.00	16.21	V

11938.500	36.29	-31.48	39.09	28.68	54.00	17.71	V
11926.900	36.28	-31.48	39.09	28.67	54.00	17.72	H

Channel 138

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17996.700	41.94	-25.50	46.66	20.78	54.00	12.06	V
17991.800	41.90	-25.50	46.66	20.74	54.00	12.10	H
13339.300	38.03	-29.49	39.71	27.81	54.00	15.97	H
14498.700	37.94	-28.59	42.46	24.07	54.00	16.06	V
11964.300	36.12	-31.48	39.09	28.51	54.00	17.88	H
11873.500	36.03	-31.85	39.05	28.83	54.00	17.97	H

802.11ac-HT160
Channel 50

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17979.100	42.20	-25.50	46.66	21.04	54.00	11.80	H
17826.800	41.92	-25.50	46.66	20.76	54.00	12.08	V
13353.600	38.12	-29.49	39.71	27.90	54.00	15.88	H
14488.200	38.00	-28.59	42.46	24.13	54.00	16.00	V
5365.800	49.51	-27.43	34.01	42.93	54.00	4.49	V
5352.500	49.32	-27.43	34.01	42.74	54.00	4.68	V

Channel 114

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17785.500	41.82	-25.50	46.66	20.66	54.00	12.18	V
17745.900	41.61	-25.50	46.66	20.45	54.00	12.39	V
13349.800	37.75	-29.49	39.71	27.53	54.00	16.25	H
14497.600	37.70	-28.59	42.46	23.83	54.00	16.30	V
5447.400	52.55	-27.18	34.17	45.56	54.00	1.45	V
5438.600	52.38	-27.18	34.17	45.39	54.00	1.62	V

802.11ax-HT20

Channel 36

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17767.300	41.83	-25.50	46.66	20.67	54.00	12.17	H
17701.300	41.74	-25.74	45.95	21.53	54.00	12.26	V
14497.000	37.77	-28.59	42.46	23.90	54.00	16.23	V
13342.000	37.71	-29.49	39.71	27.49	54.00	16.29	V
5150.000	44.52	-27.61	33.67	38.46	54.00	9.48	H
5150.000	44.50	-27.61	33.67	38.44	54.00	9.50	H

Channel 40

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17720.000	41.59	-25.74	45.95	21.38	54.00	12.41	H
17994.500	41.56	-25.50	46.66	20.40	54.00	12.44	H
14486.000	37.82	-28.59	42.46	23.95	54.00	16.18	H
14499.800	37.79	-28.59	42.46	23.92	54.00	16.21	H
11942.300	36.50	-31.48	39.09	28.89	54.00	17.50	V
11918.600	36.29	-31.48	39.09	28.68	54.00	17.71	V

Channel 48

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17793.800	41.90	-25.50	46.66	20.74	54.00	12.10	V
17874.000	41.78	-25.50	46.66	20.62	54.00	12.22	H
13333.200	37.99	-29.49	39.71	27.77	54.00	16.01	H
13343.700	37.70	-29.49	39.71	27.48	54.00	16.30	V
11933.000	36.38	-31.48	39.09	28.77	54.00	17.62	V
11999.000	36.04	-31.48	39.09	28.43	54.00	17.96	H

Channel 52

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17990.700	41.66	-25.50	46.66	20.50	54.00	12.34	H
17767.300	41.55	-25.50	46.66	20.39	54.00	12.45	V
14493.200	37.92	-28.59	42.46	24.05	54.00	16.08	H
14499.200	37.89	-28.59	42.46	24.02	54.00	16.11	V
11540.200	36.15	-32.26	38.84	29.58	54.00	17.85	H
11939.000	36.10	-31.48	39.09	28.49	54.00	17.90	H

Channel 56

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17726.700	41.65	-25.74	45.95	21.44	54.00	12.35	V
17952.200	41.55	-25.50	46.66	20.39	54.00	12.45	V
14485.500	37.99	-28.59	42.46	24.12	54.00	16.01	V
14488.200	37.88	-28.59	42.46	24.01	54.00	16.12	V
11877.400	36.15	-31.85	39.05	28.95	54.00	17.85	V
11988.500	36.11	-31.48	39.09	28.50	54.00	17.89	V

Channel 64

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17950.500	41.93	-25.50	46.66	20.77	54.00	12.07	V
17888.300	41.79	-25.50	46.66	20.63	54.00	12.21	V
14497.600	37.94	-28.59	42.46	24.07	54.00	16.06	V
13332.100	37.86	-29.49	39.71	27.64	54.00	16.14	V
5350.000	44.08	-27.43	34.01	37.50	54.00	9.92	H
5350.000	44.05	-27.43	34.01	37.47	54.00	9.95	H

Channel 100

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17985.200	41.66	-25.50	46.66	20.50	54.00	12.34	H
17970.800	41.64	-25.50	46.66	20.48	54.00	12.36	V
14493.200	37.95	-28.59	42.46	24.08	54.00	16.05	V
13323.400	37.90	-29.49	39.71	27.68	54.00	16.10	V
5456.700	41.76	-27.18	34.17	34.77	54.00	12.24	H
5454.800	41.71	-27.18	34.17	34.72	54.00	12.29	H

Channel 116

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17768.500	41.72	-25.50	46.66	20.56	54.00	12.28	V
17978.500	41.66	-25.50	46.66	20.50	54.00	12.34	H
13353.600	38.14	-29.49	39.71	27.92	54.00	15.86	H
13345.900	38.12	-29.49	39.71	27.90	54.00	15.88	H
11937.900	36.42	-31.48	39.09	28.81	54.00	17.58	H
11995.600	36.15	-31.48	39.09	28.54	54.00	17.85	V

Channel 140

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17994.000	42.18	-25.50	46.66	21.02	54.00	11.82	V
17987.300	42.04	-25.50	46.66	20.88	54.00	11.96	H
14498.100	38.37	-28.59	42.46	24.50	54.00	15.63	V
13337.100	37.94	-29.49	39.71	27.72	54.00	16.06	V
11940.100	36.39	-31.48	39.09	28.78	54.00	17.61	V
11937.400	36.25	-31.48	39.09	28.64	54.00	17.75	V

Channel 144

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17997.200	41.78	-25.50	46.66	20.62	54.00	12.22	H
17981.800	41.70	-25.50	46.66	20.54	54.00	12.30	V
14485.000	37.71	-28.59	42.46	23.84	54.00	16.29	H
13331.600	37.53	-29.49	39.71	27.31	54.00	16.47	V
11942.300	36.24	-31.48	39.09	28.63	54.00	17.76	V

11955.500	36.05	-31.48	39.09	28.44	54.00	17.95	V
-----------	-------	--------	-------	-------	-------	-------	---

802.11ax-HT40

Channel 38

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17700.800	41.64	-25.74	45.95	21.43	54.00	12.36	V
17706.300	41.49	-25.74	45.95	21.28	54.00	12.51	H
13326.100	37.66	-29.49	39.71	27.44	54.00	16.34	H
13335.500	37.56	-29.49	39.71	27.34	54.00	16.44	H
5150.000	49.91	-27.61	33.67	43.85	54.00	4.09	H
5149.900	49.70	-27.61	33.67	43.64	54.00	4.30	H

Channel 46

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17750.800	41.75	-25.50	46.66	20.59	54.00	12.25	V
17959.300	41.66	-25.50	46.66	20.50	54.00	12.34	V
13352.000	37.61	-29.49	39.71	27.39	54.00	16.39	V
13337.100	37.56	-29.49	39.71	27.34	54.00	16.44	H
11927.500	36.15	-31.48	39.09	28.54	54.00	17.85	V
11962.100	36.10	-31.48	39.09	28.49	54.00	17.90	V

Channel 54

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17986.800	41.71	-25.50	46.66	20.55	54.00	12.29	H
17742.000	41.67	-25.50	46.66	20.51	54.00	12.33	V
13348.100	37.94	-29.49	39.71	27.72	54.00	16.06	V
14498.700	37.82	-28.59	42.46	23.95	54.00	16.18	V
11942.300	36.21	-31.48	39.09	28.60	54.00	17.79	H
11925.800	36.10	-31.48	39.09	28.49	54.00	17.90	V

Channel 62

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17972.500	41.69	-25.50	46.66	20.53	54.00	12.31	H
17776.700	41.66	-25.50	46.66	20.50	54.00	12.34	V
14483.900	38.00	-28.59	42.46	24.13	54.00	16.00	H
13350.900	37.95	-29.49	39.71	27.73	54.00	16.05	H
5350.100	47.14	-27.43	34.01	40.56	54.00	6.86	H
5350.700	46.89	-27.43	34.01	40.31	54.00	7.11	H

Channel 102

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17971.400	42.10	-25.50	46.66	20.94	54.00	11.90	H
17711.800	42.08	-25.74	45.95	21.87	54.00	11.92	H
13344.800	38.00	-29.49	39.71	27.78	54.00	16.00	V
13348.600	37.84	-29.49	39.71	27.62	54.00	16.16	V
5457.600	44.05	-27.18	34.17	37.06	54.00	9.95	H
5457.500	43.61	-27.18	34.17	36.62	54.00	10.39	H

Channel 118

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17954.900	41.80	-25.50	46.66	20.64	54.00	12.20	H
17778.300	41.68	-25.50	46.66	20.52	54.00	12.32	H
14489.900	37.87	-28.59	42.46	24.00	54.00	16.13	H
13341.500	37.85	-29.49	39.71	27.63	54.00	16.15	V
11935.100	36.11	-31.48	39.09	28.50	54.00	17.89	V
11927.500	36.06	-31.48	39.09	28.45	54.00	17.94	V

Channel 134

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17986.200	41.73	-25.50	46.66	20.57	54.00	12.27	H
17702.500	41.70	-25.74	45.95	21.49	54.00	12.30	H
14481.600	38.18	-28.59	42.46	24.31	54.00	15.82	V
14472.300	37.76	-28.59	42.46	23.89	54.00	16.24	V
11941.200	36.14	-31.48	39.09	28.53	54.00	17.86	H

11917.500	36.09	-31.48	39.09	28.48	54.00	17.91	V
-----------	-------	--------	-------	-------	-------	-------	---

Channel 142

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17787.200	41.77	-25.50	46.66	20.61	54.00	12.23	H
17839.400	41.75	-25.50	46.66	20.59	54.00	12.25	V
14499.200	37.95	-28.59	42.46	24.08	54.00	16.05	V
14493.800	37.82	-28.59	42.46	23.95	54.00	16.18	H
11980.800	36.19	-31.48	39.09	28.58	54.00	17.81	V
11530.900	36.08	-32.26	38.84	29.51	54.00	17.92	V

802.11ax-HT80
Channel 42

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17745.900	41.78	-25.50	46.66	20.62	54.00	12.22	H
17980.200	41.69	-25.50	46.66	20.53	54.00	12.31	H
13325.500	37.74	-29.49	39.71	27.52	54.00	16.26	H
14478.900	37.74	-28.59	42.46	23.87	54.00	16.26	V
5149.900	51.16	-27.61	33.67	45.10	54.00	2.84	H
5140.500	51.11	-27.61	33.67	45.05	54.00	2.89	H

Channel 58

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17997.800	41.96	-25.50	46.66	20.80	54.00	12.04	H
17765.700	41.53	-25.50	46.66	20.37	54.00	12.47	H
8213.900	39.10	-35.19	37.45	36.85	54.00	14.90	V
14499.800	37.95	-28.59	42.46	24.08	54.00	16.05	V
5350.200	45.11	-27.43	34.01	38.53	54.00	8.89	H
5350.900	44.98	-27.43	34.01	38.40	54.00	9.02	H

Channel 106

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17778.300	41.68	-25.50	46.66	20.52	54.00	12.32	V
17950.000	41.66	-25.50	46.66	20.50	54.00	12.34	V
13346.500	37.80	-29.49	39.71	27.58	54.00	16.20	H
14494.900	37.78	-28.59	42.46	23.91	54.00	16.22	H
5459.600	43.03	-27.18	34.17	36.04	54.00	10.97	H
5456.600	43.02	-27.18	34.17	36.03	54.00	10.98	H

Channel 122

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17745.300	41.67	-25.50	46.66	20.51	54.00	12.33	H
17998.900	41.63	-25.50	46.66	20.47	54.00	12.37	H
14491.500	37.91	-28.59	42.46	24.04	54.00	16.09	H
14495.400	37.70	-28.59	42.46	23.83	54.00	16.30	H
11947.800	36.24	-31.48	39.09	28.63	54.00	17.76	V
11893.400	36.19	-31.85	39.05	28.99	54.00	17.81	V

Channel 138

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17803.700	41.91	-25.50	46.66	20.75	54.00	12.09	H
17780.000	41.86	-25.50	46.66	20.70	54.00	12.14	H
14482.800	37.93	-28.59	42.46	24.06	54.00	16.07	V
13341.000	37.76	-29.49	39.71	27.54	54.00	16.24	V
11928.000	36.25	-31.48	39.09	28.64	54.00	17.75	H
11984.100	36.18	-31.48	39.09	28.57	54.00	17.82	V

802.11ax-HT160

Channel 50

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17946.700	41.71	-25.50	46.66	20.55	54.00	12.29	V
17811.900	41.66	-25.50	46.66	20.50	54.00	12.34	V
13334.400	37.97	-29.49	39.71	27.75	54.00	16.03	V
14488.200	37.83	-28.59	42.46	23.96	54.00	16.17	H
5361.300	48.99	-27.43	34.01	42.41	54.00	5.01	H
5384.200	48.98	-27.36	34.09	42.26	54.00	5.02	H

Channel 114

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17770.100	42.03	-25.50	46.66	20.87	54.00	11.97	V
17979.700	42.00	-25.50	46.66	20.84	54.00	12.00	V
14480.500	37.85	-28.59	42.46	23.98	54.00	16.15	H
13339.900	37.77	-29.49	39.71	27.55	54.00	16.23	H
5453.300	43.59	-27.18	34.17	36.60	54.00	10.41	H
5438.700	43.57	-27.18	34.17	36.58	54.00	10.43	H

PEAK Results:
802.11a

Channel 36

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17990.700	53.75	-25.50	46.66	32.59	74.00	20.25	V
17311.400	52.76	-25.95	44.35	34.35	68.30	15.54	V
13679.800	50.50	-29.50	40.43	39.57	68.30	17.80	V
13550.500	50.32	-29.56	39.99	39.89	68.30	17.98	V
5149.700	62.22	-27.61	33.67	56.16	74.00	11.78	H
5149.400	61.72	-27.61	33.67	55.66	74.00	12.28	H

Channel 40

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17980.200	52.99	-25.50	46.66	31.83	74.00	21.01	V
17305.300	52.75	-25.95	44.35	34.34	68.30	15.55	V
13841.500	50.55	-29.51	41.30	38.76	68.30	17.75	H
13668.200	50.39	-29.50	40.43	39.46	68.30	17.91	V
10397.400	47.67	-33.22	38.19	42.70	68.30	20.63	V
11875.200	47.10	-31.85	39.05	39.90	74.00	26.90	V

Channel 48

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17926.800	52.46	-25.50	46.66	31.30	74.00	21.54	H
17989.500	52.41	-25.50	46.66	31.25	74.00	21.59	V
13566.500	50.00	-29.50	40.43	39.07	68.30	18.30	V
13658.300	49.82	-29.50	40.43	38.89	68.30	18.48	V
10637.100	46.78	-32.76	38.38	41.16	74.00	27.22	V
11933.000	46.42	-31.48	39.09	38.81	74.00	27.58	H

Channel 52

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17979.700	52.47	-25.50	46.66	31.31	74.00	21.53	V
17495.100	52.27	-26.85	45.25	33.87	68.30	16.03	H
13744.100	50.88	-29.10	40.86	39.11	68.30	17.42	H
13642.400	50.04	-29.50	40.43	39.11	68.30	18.26	V
7013.200	48.16	-35.24	36.14	47.25	68.30	20.14	H
7012.600	48.03	-35.24	36.14	47.12	68.30	20.27	H

Channel 56

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17734.300	52.13	-25.74	45.95	31.92	74.00	21.87	V
17944.500	52.08	-25.50	46.66	30.92	74.00	21.92	V
13615.400	50.25	-29.50	40.43	39.32	68.30	18.05	V
13836.500	50.06	-29.51	41.30	38.27	68.30	18.24	H
7039.600	49.00	-35.37	36.25	48.12	68.30	19.30	H
7040.100	48.34	-35.37	36.25	47.46	68.30	19.96	H

Channel 64

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17745.900	53.93	-25.50	46.66	32.77	74.00	20.07	V
17947.200	52.32	-25.50	46.66	31.16	74.00	21.68	V
13651.100	49.76	-29.50	40.43	38.83	68.30	18.54	H
14409.600	49.64	-28.59	42.46	35.77	68.30	18.66	V
5350.100	59.79	-27.43	34.01	53.21	74.00	14.21	H
5350.100	58.89	-27.43	34.01	52.31	74.00	15.11	H

Channel 100

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17810.200	52.73	-25.50	46.66	31.57	74.00	21.27	V
17215.700	52.68	-25.95	44.35	34.27	68.30	15.62	V
13607.700	49.93	-29.50	40.43	39.00	68.30	18.37	V
13544.500	49.89	-29.56	39.99	39.46	68.30	18.41	H
5444.300	53.62	-27.18	34.17	46.63	74.00	20.38	H

5470.000	56.16	-27.18	34.17	49.17	68.30	12.14	H
----------	-------	--------	-------	-------	-------	-------	---

Channel 116

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17922.500	52.83	-25.50	46.66	31.67	74.00	21.17	V
17921.900	52.41	-25.50	46.66	31.25	74.00	21.59	V
13738.600	50.83	-29.10	40.86	39.06	68.30	17.47	H
13568.100	49.98	-29.50	40.43	39.05	68.30	18.32	H
11046.400	47.39	-32.49	38.72	41.15	74.00	26.61	V
11455.500	46.63	-32.26	38.84	40.06	74.00	27.37	V

Channel 140

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17630.400	53.93	-25.74	45.95	33.72	68.30	14.37	V
17780.500	53.39	-25.50	46.66	32.23	74.00	20.61	V
13561.000	51.26	-29.50	40.43	40.33	68.30	17.04	H
13634.600	51.04	-29.50	40.43	40.11	68.30	17.26	V
5726.000	61.53	-27.07	34.31	54.29	68.30	6.77	H
5726.200	61.52	-27.07	34.31	54.28	68.30	6.78	H

Channel 144

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17760.800	52.76	-25.50	46.66	31.60	74.00	21.24	V
17980.800	52.46	-25.50	46.66	31.30	74.00	21.54	H
13650.600	50.34	-29.50	40.43	39.41	68.30	17.96	H
13647.900	50.02	-29.50	40.43	39.09	68.30	18.28	H
10652.000	46.78	-32.76	38.38	41.16	74.00	27.22	V
10961.600	46.60	-32.82	38.70	40.72	74.00	27.40	H

802.11n-HT20

Channel 36

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17747.000	52.34	-25.50	46.66	31.18	74.00	21.66	V
17906.000	52.03	-25.50	46.66	30.87	74.00	21.97	H
13728.100	50.21	-29.10	40.86	38.44	68.30	18.09	H
13578.000	50.20	-29.50	40.43	39.27	68.30	18.10	H
5149.300	55.62	-27.61	33.67	49.56	74.00	18.38	H
5149.500	55.18	-27.61	33.67	49.12	74.00	18.82	H

Channel 40

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17882.300	52.87	-25.50	46.66	31.71	74.00	21.13	V
17286.100	52.70	-25.95	44.35	34.29	68.30	15.60	V
13536.200	49.98	-29.56	39.99	39.55	68.30	18.32	H
13597.800	49.84	-29.50	40.43	38.91	68.30	18.46	H
11031.500	46.52	-32.49	38.72	40.28	74.00	27.48	H
11920.300	46.47	-31.48	39.09	38.86	74.00	27.53	V

Channel 48

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17915.800	52.80	-25.50	46.66	31.64	74.00	21.20	V
17924.100	52.42	-25.50	46.66	31.26	74.00	21.58	H
13656.600	50.10	-29.50	40.43	39.17	68.30	18.20	H
13579.600	49.78	-29.50	40.43	38.85	68.30	18.52	V
10707.500	46.85	-32.77	38.49	41.13	74.00	27.15	V
11468.200	46.38	-32.26	38.84	39.81	74.00	27.62	V

Channel 52

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17763.500	53.18	-25.50	46.66	32.02	74.00	20.82	H
17764.600	52.82	-25.50	46.66	31.66	74.00	21.18	H
13657.800	50.83	-29.50	40.43	39.90	68.30	17.47	V
13679.800	49.90	-29.50	40.43	38.97	68.30	18.40	H
7013.200	48.27	-35.24	36.14	47.36	68.30	20.03	H
7012.600	47.76	-35.24	36.14	46.85	68.30	20.54	H

Channel 56

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17728.300	52.76	-25.74	45.95	32.55	74.00	21.24	V
17718.400	52.02	-25.74	45.95	31.81	74.00	21.98	V
13718.200	50.04	-29.10	40.86	38.27	68.30	18.26	V
13641.200	49.81	-29.50	40.43	38.88	68.30	18.49	V
7039.600	49.12	-35.37	36.25	48.24	68.30	19.18	H
7040.100	48.35	-35.37	36.25	47.47	68.30	19.95	V

Channel 64

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17947.800	53.40	-25.50	46.66	32.24	74.00	20.60	H
17930.200	52.92	-25.50	46.66	31.76	74.00	21.08	H
13584.600	50.51	-29.50	40.43	39.58	68.30	17.79	H
13589.500	50.29	-29.50	40.43	39.36	68.30	18.01	H
5350.800	55.27	-27.43	34.01	48.69	74.00	18.73	H
5351.200	55.21	-27.43	34.01	48.63	74.00	18.79	H

Channel 100

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17947.200	52.35	-25.50	46.66	31.19	74.00	21.65	V
17778.900	52.18	-25.50	46.66	31.02	74.00	21.82	V
13622.000	50.15	-29.50	40.43	39.22	68.30	18.15	V
13767.200	50.05	-29.10	40.86	38.28	68.30	18.25	V
5395.600	53.71	-27.36	34.09	46.99	74.00	20.29	H
5467.800	53.33	-27.18	34.17	46.34	68.30	14.97	H

Channel 116

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17717.300	52.37	-25.74	45.95	32.16	74.00	21.63	V
17946.100	52.19	-25.50	46.66	31.03	74.00	21.81	V
13756.800	50.49	-29.10	40.86	38.72	68.30	17.81	V
13671.000	50.29	-29.50	40.43	39.36	68.30	18.01	V
11956.600	46.91	-31.48	39.09	39.30	74.00	27.09	H
11530.400	46.74	-32.26	38.84	40.17	74.00	27.26	H

Channel 140

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17924.700	53.36	-25.50	46.66	32.20	74.00	20.64	V
17983.500	52.82	-25.50	46.66	31.66	74.00	21.18	H
13614.300	51.22	-29.50	40.43	40.29	68.30	17.08	V
14009.200	51.20	-29.44	41.66	38.98	68.30	17.10	V
5726.900	56.51	-27.07	34.31	49.27	68.30	11.79	H
5726.400	56.40	-27.07	34.31	49.16	68.30	11.90	H

Channel 144

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17920.800	53.03	-25.50	46.66	31.87	74.00	20.97	V
17287.800	52.40	-25.95	44.35	33.99	68.30	15.90	H
13571.400	50.32	-29.50	40.43	39.39	68.30	17.98	H
13757.300	49.93	-29.10	40.86	38.16	68.30	18.37	V
10785.100	46.40	-32.33	38.59	40.14	74.00	27.60	H
11036.500	46.36	-32.49	38.72	40.12	74.00	27.64	V

802.11n-HT40

Channel 38

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17609.500	52.68	-25.74	45.95	32.47	68.30	15.62	V
17221.800	52.44	-25.95	44.35	34.03	68.30	15.86	V
14587.200	50.25	-27.29	41.90	35.64	68.30	18.05	H
14587.800	50.22	-27.29	41.90	35.61	68.30	18.08	H
5147.800	61.75	-27.61	33.67	55.69	74.00	12.25	H
5148.400	60.22	-27.61	33.67	54.16	74.00	13.78	H

Channel 46

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17925.800	52.43	-25.50	46.66	31.27	74.00	21.57	H
17819.600	52.13	-25.50	46.66	30.97	74.00	21.87	H
13640.700	50.71	-29.50	40.43	39.78	68.30	17.59	H
13629.100	49.79	-29.50	40.43	38.86	68.30	18.51	V
11939.500	47.39	-31.48	39.09	39.78	74.00	26.61	H
11930.200	46.57	-31.48	39.09	38.96	74.00	27.43	H

Channel 54

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17985.700	52.62	-25.50	46.66	31.46	74.00	21.38	V
17386.200	52.42	-25.95	44.35	34.01	68.30	15.88	H
13740.800	50.19	-29.10	40.86	38.42	68.30	18.11	H
13536.800	50.18	-29.56	39.99	39.75	68.30	18.12	V
7026.400	48.98	-35.24	36.14	48.07	68.30	19.32	H
11532.000	47.38	-32.26	38.84	40.81	74.00	26.62	V

Channel 62

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17976.300	52.84	-25.50	46.66	31.68	74.00	21.16	H
17615.000	52.32	-25.74	45.95	32.11	68.30	15.98	H
13656.100	50.13	-29.50	40.43	39.20	68.30	18.17	H
13559.300	50.06	-29.50	40.43	39.13	68.30	18.24	V
5352.500	59.79	-27.43	34.01	53.21	74.00	14.21	H
5350.500	59.34	-27.43	34.01	52.76	74.00	14.66	H

Channel 102

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17888.900	52.77	-25.50	46.66	31.61	74.00	21.23	V
17647.500	52.76	-25.74	45.95	32.55	68.30	15.54	H
13562.600	50.33	-29.50	40.43	39.40	68.30	17.97	H
13661.600	50.07	-29.50	40.43	39.14	68.30	18.23	V
5459.400	54.74	-27.18	34.17	47.75	74.00	19.26	H
5469.400	59.18	-27.18	34.17	52.19	68.30	9.12	H

Channel 118

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17241.500	52.98	-25.95	44.35	34.57	68.30	15.32	V
17613.300	52.14	-25.74	45.95	31.93	68.30	16.16	V
13599.500	50.54	-29.50	40.43	39.61	68.30	17.76	V
13661.600	50.18	-29.50	40.43	39.25	68.30	18.12	H
11985.800	46.89	-31.48	39.09	39.28	74.00	27.11	H
11752.000	46.48	-31.99	38.98	39.49	74.00	27.52	V

Channel 134

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17821.800	52.55	-25.50	46.66	31.39	74.00	21.45	H
17748.100	52.45	-25.50	46.66	31.29	74.00	21.55	V
13556.500	50.73	-29.56	39.99	40.30	68.30	17.57	V
13612.100	49.88	-29.50	40.43	38.95	68.30	18.42	V
5798.000	54.73	-27.07	34.33	47.47	68.30	13.57	V
5735.700	53.57	-27.07	34.31	46.33	68.30	14.73	V

Channel 142

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17997.800	52.89	-25.50	46.66	31.73	74.00	21.11	H
17992.800	52.33	-25.50	46.66	31.17	74.00	21.67	H
14013.600	50.43	-29.44	41.66	38.21	68.30	17.87	V
13590.100	50.34	-29.50	40.43	39.41	68.30	17.96	V
11777.900	46.60	-31.99	38.98	39.61	74.00	27.40	V
11562.800	46.57	-32.31	38.91	39.98	74.00	27.43	V

802.11ac-HT20

Channel 36

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17740.400	52.65	-25.50	46.66	31.49	74.00	21.35	H
17838.300	51.89	-25.50	46.66	30.73	74.00	22.11	V
13673.700	50.21	-29.50	40.43	39.28	68.30	18.09	H
13533.500	50.17	-29.56	39.99	39.74	68.30	18.13	V
5147.800	55.63	-27.61	33.67	49.57	74.00	18.37	H
5148.900	55.44	-27.61	33.67	49.38	74.00	18.56	H

Channel 40

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17961.000	52.31	-25.50	46.66	31.15	74.00	21.69	H
17594.100	52.30	-25.74	45.95	32.09	68.30	16.00	V
13873.400	49.81	-29.51	41.30	38.02	68.30	18.49	H
13733.100	49.72	-29.10	40.86	37.95	68.30	18.58	V
10404.500	47.42	-33.22	38.19	42.45	68.30	20.88	V
11934.000	46.65	-31.48	39.09	39.04	74.00	27.35	V

Channel 48

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17977.500	51.94	-25.50	46.66	30.78	74.00	22.06	H
17417.500	51.88	-26.85	45.25	33.48	68.30	16.42	V
13617.600	49.74	-29.50	40.43	38.81	68.30	18.56	H
13729.200	49.64	-29.10	40.86	37.87	68.30	18.66	V
11950.000	46.82	-31.48	39.09	39.21	74.00	27.18	V
10271.400	46.67	-33.68	38.17	42.17	68.30	21.63	H

Channel 52

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17981.800	53.26	-25.50	46.66	32.10	74.00	20.74	V
17311.400	53.08	-25.95	44.35	34.67	68.30	15.22	V
13660.000	50.61	-29.50	40.43	39.68	68.30	17.69	V
13636.900	50.56	-29.50	40.43	39.63	68.30	17.74	H
7013.200	48.30	-35.24	36.14	47.39	68.30	20.00	H
11995.100	47.45	-31.48	39.09	39.84	74.00	26.55	V

Channel 56

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17989.500	52.33	-25.50	46.66	31.17	74.00	21.67	V
17700.200	52.15	-25.74	45.95	31.94	74.00	21.85	H
13605.000	49.85	-29.50	40.43	38.92	68.30	18.45	H
13679.200	49.78	-29.50	40.43	38.85	68.30	18.52	H
7039.600	48.85	-35.37	36.25	47.97	68.30	19.45	H
7040.100	48.38	-35.37	36.25	47.50	68.30	19.92	H

Channel 64

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17844.900	52.31	-25.50	46.66	31.15	74.00	21.69	V
17755.200	52.08	-25.50	46.66	30.92	74.00	21.92	H
13656.600	50.21	-29.50	40.43	39.28	68.30	18.09	V
13643.500	49.95	-29.50	40.43	39.02	68.30	18.35	H
5350.400	55.78	-27.43	34.01	49.20	74.00	18.22	H
5351.600	54.88	-27.43	34.01	48.30	74.00	19.12	H

Channel 100

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17857.000	52.65	-25.50	46.66	31.49	74.00	21.35	H
17742.000	52.34	-25.50	46.66	31.18	74.00	21.66	H
13580.800	50.14	-29.50	40.43	39.21	68.30	18.16	H
13665.500	50.12	-29.50	40.43	39.19	68.30	18.18	H
5376.200	53.14	-27.36	34.09	46.42	74.00	20.86	H
5469.100	52.89	-27.18	34.17	45.90	68.30	15.41	H

Channel 116

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17987.300	52.03	-25.50	46.66	30.87	74.00	21.97	V
17804.800	52.01	-25.50	46.66	30.85	74.00	21.99	V
13572.000	50.25	-29.50	40.43	39.32	68.30	18.05	V
13727.600	50.18	-29.10	40.86	38.41	68.30	18.12	V
11842.200	47.04	-31.85	39.05	39.84	74.00	26.96	V
11937.900	46.92	-31.48	39.09	39.31	74.00	27.08	V

Channel 140

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17617.200	53.09	-25.74	45.95	32.88	68.30	15.21	H
17767.300	52.65	-25.50	46.66	31.49	74.00	21.35	H
13672.600	50.67	-29.50	40.43	39.74	68.30	17.63	V
13665.500	50.18	-29.50	40.43	39.25	68.30	18.12	V
5726.400	56.55	-27.07	34.31	49.31	68.30	11.75	H
5725.000	55.54	-27.07	34.31	48.30	68.30	12.76	H

Channel 144

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17964.800	52.67	-25.50	46.66	31.51	74.00	21.33	V
17565.500	52.43	-25.74	45.95	32.22	68.30	15.87	V
13752.900	50.33	-29.10	40.86	38.56	68.30	17.97	V
13737.500	50.31	-29.10	40.86	38.54	68.30	17.99	V
11046.400	47.22	-32.49	38.72	40.98	74.00	26.78	H
11944.000	46.78	-31.48	39.09	39.17	74.00	27.22	H

802.11ac-HT40

Channel 38

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17772.300	52.16	-25.50	46.66	31.00	74.00	21.84	V
17926.300	52.07	-25.50	46.66	30.91	74.00	21.93	V
13697.900	50.69	-29.10	40.86	38.92	68.30	17.61	V
13581.300	49.88	-29.50	40.43	38.95	68.30	18.42	H
5149.700	60.89	-27.61	33.67	54.83	74.00	13.11	H
5150.000	60.11	-27.61	33.67	54.05	74.00	13.89	H

Channel 46

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17275.100	52.37	-25.95	44.35	33.96	68.30	15.93	H
17687.600	52.13	-25.74	45.95	31.92	68.30	16.17	H
13574.700	50.90	-29.50	40.43	39.97	68.30	17.40	H
13579.100	50.28	-29.50	40.43	39.35	68.30	18.02	H
11820.800	46.67	-31.85	39.05	39.47	74.00	27.33	V
11052.400	46.60	-32.49	38.72	40.36	74.00	27.40	V

Channel 54

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17187.700	52.52	-26.60	43.36	35.76	68.30	15.78	V
17907.600	52.24	-25.50	46.66	31.08	74.00	21.76	H
13642.400	50.74	-29.50	40.43	39.81	68.30	17.56	H
13675.900	50.58	-29.50	40.43	39.65	68.30	17.72	H
7026.400	48.58	-35.24	36.14	47.67	68.30	19.72	H
7026.900	46.89	-35.24	36.14	45.98	68.30	21.41	H

Channel 62

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17983.000	52.37	-25.50	46.66	31.21	74.00	21.63	H
17737.100	51.96	-25.50	46.66	30.80	74.00	22.04	H
14317.800	50.17	-28.42	42.34	36.25	68.30	18.13	V
13552.700	50.12	-29.56	39.99	39.69	68.30	18.18	V
5350.300	61.88	-27.43	34.01	55.30	74.00	12.12	H
5351.500	60.45	-27.43	34.01	53.87	74.00	13.55	H

Channel 102

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17939.000	52.69	-25.50	46.66	31.53	74.00	21.31	H
17981.800	52.29	-25.50	46.66	31.13	74.00	21.71	H
13657.800	50.02	-29.50	40.43	39.09	68.30	18.28	H
13660.000	50.01	-29.50	40.43	39.08	68.30	18.29	V
5457.600	54.68	-27.18	34.17	47.69	74.00	19.32	H
5469.200	59.50	-27.18	34.17	52.51	68.30	8.80	H

Channel 118

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17980.800	53.03	-25.50	46.66	31.87	74.00	20.97	H
17626.500	52.70	-25.74	45.95	32.49	68.30	15.60	H
14219.300	50.39	-28.99	42.00	37.37	68.30	17.91	V
13604.400	50.28	-29.50	40.43	39.35	68.30	18.02	H
11433.000	46.65	-32.42	38.79	40.28	74.00	27.35	H
11945.000	46.24	-31.48	39.09	38.63	74.00	27.76	V

Channel 134

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17826.800	52.14	-25.50	46.66	30.98	74.00	21.86	V
17744.800	52.09	-25.50	46.66	30.93	74.00	21.91	V
13646.800	50.61	-29.50	40.43	39.68	68.30	17.69	V
13659.400	50.20	-29.50	40.43	39.27	68.30	18.10	V
5806.500	53.39	-27.07	34.33	46.13	68.30	14.91	V
5818.500	53.37	-27.07	34.33	46.11	68.30	14.93	H

Channel 142

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17268.500	52.11	-25.95	44.35	33.70	68.30	16.19	V
17306.500	52.05	-25.95	44.35	33.64	68.30	16.25	V
13550.500	50.76	-29.56	39.99	40.33	68.30	17.54	H
13612.600	50.24	-29.50	40.43	39.31	68.30	18.06	H
11927.500	47.15	-31.48	39.09	39.54	74.00	26.85	H
11924.100	46.92	-31.48	39.09	39.31	74.00	27.08	V

802.11ac-HT80

Channel 42

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17377.400	52.27	-25.95	44.35	33.86	68.30	16.03	H
17918.600	52.27	-25.50	46.66	31.11	74.00	21.73	H
13611.500	50.66	-29.50	40.43	39.73	68.30	17.64	H
13598.900	50.42	-29.50	40.43	39.49	68.30	17.88	V
5147.300	63.47	-27.61	33.67	57.41	74.00	10.53	H
5147.500	62.84	-27.61	33.67	56.78	74.00	11.16	H

Channel 58

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17809.200	52.92	-25.50	46.66	31.76	74.00	21.08	V
17479.700	52.36	-26.85	45.25	33.96	68.30	15.94	V
13923.400	50.49	-29.51	41.30	38.70	68.30	17.81	V
13756.200	50.32	-29.10	40.86	38.55	68.30	17.98	H
5360.300	58.50	-27.43	34.01	51.92	74.00	15.50	H
5359.800	58.41	-27.43	34.01	51.83	74.00	15.59	H

Channel 106

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17655.200	53.39	-25.74	45.95	33.18	68.30	14.91	V
17725.000	52.24	-25.74	45.95	32.03	74.00	21.76	V
13639.600	50.46	-29.50	40.43	39.53	68.30	17.84	H
13650.000	50.15	-29.50	40.43	39.22	68.30	18.15	H
5457.500	55.19	-27.18	34.17	48.20	74.00	18.81	H
5469.600	54.37	-27.18	34.17	47.38	68.30	13.93	H

Channel 122

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17961.000	52.33	-25.50	46.66	31.17	74.00	21.67	H
17952.700	52.28	-25.50	46.66	31.12	74.00	21.72	H
13765.500	49.93	-29.10	40.86	38.16	68.30	18.37	V
13749.000	49.84	-29.10	40.86	38.07	68.30	18.46	V
5728.100	56.35	-27.07	34.31	49.11	68.30	11.95	H
5737.900	55.93	-27.07	34.31	48.69	68.30	12.37	H

Channel 138

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17734.300	52.70	-25.74	45.95	32.49	74.00	21.30	V
17976.900	52.29	-25.50	46.66	31.13	74.00	21.71	V
14251.800	50.35	-28.42	42.34	36.43	68.30	17.95	V
13641.800	50.02	-29.50	40.43	39.09	68.30	18.28	V
10189.500	47.28	-33.33	38.15	42.46	68.30	21.02	H
11924.100	46.55	-31.48	39.09	38.94	74.00	27.45	H

802.11ac-HT160

Channel 50

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17750.800	52.41	-25.50	46.66	31.25	74.00	21.59	H
17296.500	52.23	-25.95	44.35	33.82	68.30	16.07	H
13708.400	50.32	-29.10	40.86	38.55	68.30	17.98	V
13766.100	49.82	-29.10	40.86	38.05	68.30	18.48	V
5354.500	62.24	-27.43	34.01	55.66	74.00	11.76	V
5395.500	61.71	-27.36	34.09	54.99	74.00	12.29	V

Channel 114

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17957.100	52.73	-25.50	46.66	31.57	74.00	21.27	V
17748.700	52.57	-25.50	46.66	31.41	74.00	21.43	H
13636.900	50.09	-29.50	40.43	39.16	68.30	18.21	H
13751.800	49.81	-29.10	40.86	38.04	68.30	18.49	V
5456.600	62.34	-27.18	34.17	55.35	74.00	11.66	V
5468.100	62.45	-27.18	34.17	55.46	68.30	5.85	V

802.11ax-HT20

Channel 36

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17766.200	52.24	-25.50	46.66	31.08	74.00	21.76	H
17984.600	52.22	-25.50	46.66	31.06	74.00	21.78	H
13658.900	50.71	-29.50	40.43	39.78	68.30	17.59	V
13551.600	50.66	-29.56	39.99	40.23	68.30	17.64	H
5149.900	59.60	-27.61	33.67	53.54	74.00	14.40	H
5149.000	59.22	-27.61	33.67	53.16	74.00	14.78	H

Channel 40

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17408.200	52.62	-26.85	45.25	34.22	68.30	15.68	V
17995.000	52.35	-25.50	46.66	31.19	74.00	21.65	V
13575.800	50.46	-29.50	40.43	39.53	68.30	17.84	H
13628.600	50.02	-29.50	40.43	39.09	68.30	18.28	V
10395.100	47.97	-33.22	38.19	43.00	68.30	20.33	V
10395.700	46.78	-33.22	38.19	41.81	68.30	21.52	V

Channel 48

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17598.500	52.46	-25.74	45.95	32.25	68.30	15.84	H
17634.800	52.06	-25.74	45.95	31.85	68.30	16.24	V
13581.300	49.97	-29.50	40.43	39.04	68.30	18.33	V
13554.400	49.86	-29.56	39.99	39.43	68.30	18.44	V
11445.100	47.07	-32.42	38.79	40.70	74.00	26.93	V
11934.600	47.02	-31.48	39.09	39.41	74.00	26.98	H

Channel 52

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17924.700	52.95	-25.50	46.66	31.79	74.00	21.05	H
17686.000	52.69	-25.74	45.95	32.48	68.30	15.61	H
13601.100	50.73	-29.50	40.43	39.80	68.30	17.57	V
13644.500	50.33	-29.50	40.43	39.40	68.30	17.97	V
7012.600	49.45	-35.24	36.14	48.54	68.30	18.85	H
7013.200	49.36	-35.24	36.14	48.45	68.30	18.94	H

Channel 56

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17979.700	52.89	-25.50	46.66	31.73	74.00	21.11	V
17861.400	52.55	-25.50	46.66	31.39	74.00	21.45	V
13749.000	51.31	-29.10	40.86	39.54	68.30	16.99	V
13562.600	49.95	-29.50	40.43	39.02	68.30	18.35	V
7039.600	49.17	-35.37	36.25	48.29	68.30	19.13	H
7040.100	48.40	-35.37	36.25	47.52	68.30	19.90	H

Channel 64

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17683.200	52.70	-25.74	45.95	32.49	68.30	15.60	H
17757.500	52.35	-25.50	46.66	31.19	74.00	21.65	H
13565.400	51.18	-29.50	40.43	40.25	68.30	17.12	H
13656.100	51.08	-29.50	40.43	40.15	68.30	17.22	H
5350.400	59.53	-27.43	34.01	52.95	74.00	14.47	H
5350.200	59.01	-27.43	34.01	52.43	74.00	14.99	H

Channel 100

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17920.800	52.15	-25.50	46.66	30.99	74.00	21.85	H
16542.500	51.96	-26.96	39.82	39.10	68.30	16.34	V
13546.100	50.18	-29.56	39.99	39.75	68.30	18.12	H
13651.100	50.17	-29.50	40.43	39.24	68.30	18.13	V
5416.500	52.99	-27.36	34.09	46.27	74.00	21.01	H
5469.900	57.91	-27.18	34.17	50.92	68.30	10.39	H

Channel 116

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17690.300	52.20	-25.74	45.95	31.99	68.30	16.10	H
17991.800	52.20	-25.50	46.66	31.04	74.00	21.80	H
13540.000	50.26	-29.56	39.99	39.83	68.30	18.04	H
13597.200	50.12	-29.50	40.43	39.19	68.30	18.18	H
11538.000	46.83	-32.26	38.84	40.26	74.00	27.17	V
10559.600	46.74	-32.99	38.27	41.45	68.30	21.56	V

Channel 140

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17957.700	53.02	-25.50	46.66	31.86	74.00	20.98	H
17855.300	52.87	-25.50	46.66	31.71	74.00	21.13	H
13655.000	50.88	-29.50	40.43	39.95	68.30	17.42	V
13767.800	50.36	-29.10	40.86	38.59	68.30	17.94	V
5725.400	65.47	-27.07	34.31	58.23	68.30	2.83	H
5726.700	61.55	-27.07	34.31	54.31	68.30	6.75	H

Channel 144

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17716.200	52.57	-25.74	45.95	32.36	74.00	21.43	V
17971.400	52.55	-25.50	46.66	31.39	74.00	21.45	V
13621.500	50.05	-29.50	40.43	39.12	68.30	18.25	H
13573.000	49.90	-29.50	40.43	38.97	68.30	18.40	H
11991.800	47.36	-31.48	39.09	39.75	74.00	26.64	V
11539.100	46.83	-32.26	38.84	40.26	74.00	27.17	V

802.11ax-HT40

Channel 38

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17672.200	52.31	-25.74	45.95	32.10	68.30	15.99	V
17769.000	52.29	-25.50	46.66	31.13	74.00	21.71	H
13563.100	50.55	-29.50	40.43	39.62	68.30	17.75	H
13623.100	50.12	-29.50	40.43	39.19	68.30	18.18	H
5147.900	62.95	-27.61	33.67	56.89	74.00	11.05	H
5143.400	62.73	-27.61	33.67	56.67	74.00	11.27	H

Channel 46

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17988.500	52.65	-25.50	46.66	31.49	74.00	21.35	V
17847.700	52.61	-25.50	46.66	31.45	74.00	21.39	H
13580.200	50.28	-29.50	40.43	39.35	68.30	18.02	V
13638.500	50.00	-29.50	40.43	39.07	68.30	18.30	H
11951.600	46.33	-31.48	39.09	38.72	74.00	27.67	V
11974.200	46.18	-31.48	39.09	38.57	74.00	27.82	H

Channel 54

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17370.800	52.48	-25.95	44.35	34.07	68.30	15.82	V
17931.800	52.30	-25.50	46.66	31.14	74.00	21.70	H
13569.200	50.55	-29.50	40.43	39.62	68.30	17.75	V
13660.500	50.30	-29.50	40.43	39.37	68.30	18.00	H
7026.400	49.06	-35.24	36.14	48.15	68.30	19.24	H
7026.900	47.26	-35.24	36.14	46.35	68.30	21.04	H

Channel 62

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17796.000	52.83	-25.50	46.66	31.67	74.00	21.17	V
17723.900	52.39	-25.74	45.95	32.18	74.00	21.61	H
13552.700	50.15	-29.56	39.99	39.72	68.30	18.15	V
13665.500	50.15	-29.50	40.43	39.22	68.30	18.15	V
5358.400	62.27	-27.43	34.01	55.69	74.00	11.73	H
5353.500	61.83	-27.43	34.01	55.25	74.00	12.17	H

Channel 102

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17714.500	52.85	-25.74	45.95	32.64	74.00	21.15	V
17887.200	52.47	-25.50	46.66	31.31	74.00	21.53	H
13739.100	50.42	-29.10	40.86	38.65	68.30	17.88	V
13578.500	50.20	-29.50	40.43	39.27	68.30	18.10	V
5458.400	58.05	-27.18	34.17	51.06	74.00	15.95	H
5462.400	60.00	-27.18	34.17	53.01	68.30	8.30	H

Channel 118

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17745.300	53.17	-25.50	46.66	32.01	74.00	20.83	H
17822.900	52.69	-25.50	46.66	31.53	74.00	21.31	V
13545.000	50.36	-29.56	39.99	39.93	68.30	17.94	V
13631.400	49.62	-29.50	40.43	38.69	68.30	18.68	V
11929.600	46.47	-31.48	39.09	38.86	74.00	27.53	H
11851.000	46.31	-31.85	39.05	39.11	74.00	27.69	V

Channel 134

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17863.000	52.15	-25.50	46.66	30.99	74.00	21.85	H
17819.000	52.08	-25.50	46.66	30.92	74.00	21.92	H
13597.800	51.14	-29.50	40.43	40.21	68.30	17.16	V
13602.800	50.18	-29.50	40.43	39.25	68.30	18.12	H
5816.600	54.09	-27.07	34.33	46.83	68.30	14.21	V
5747.000	53.77	-27.07	34.31	46.53	68.30	14.53	H

Channel 142

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17345.500	52.53	-25.95	44.35	34.12	68.30	15.77	V
17969.200	52.40	-25.50	46.66	31.24	74.00	21.60	H
13613.800	50.33	-29.50	40.43	39.40	68.30	17.97	V
13626.400	49.88	-29.50	40.43	38.95	68.30	18.42	H
11532.000	47.74	-32.26	38.84	41.17	74.00	26.26	V
11930.800	47.14	-31.48	39.09	39.53	74.00	26.86	H

802.11ax-HT80

Channel 42

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17934.500	52.39	-25.50	46.66	31.23	74.00	21.61	V
17608.400	51.86	-25.74	45.95	31.65	68.30	16.44	V
13744.100	50.26	-29.10	40.86	38.49	68.30	18.04	H
13764.500	50.21	-29.10	40.86	38.44	68.30	18.09	H
5149.900	64.07	-27.61	33.67	58.01	74.00	9.93	H
5149.000	63.81	-27.61	33.67	57.75	74.00	10.19	H

Channel 58

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17765.700	52.48	-25.50	46.66	31.32	74.00	21.52	H
17988.500	52.43	-25.50	46.66	31.27	74.00	21.57	H
13578.500	50.24	-29.50	40.43	39.31	68.30	18.06	V
7053.400	50.15	-35.37	36.25	49.27	68.30	18.15	V
5352.600	58.64	-27.43	34.01	52.06	74.00	15.36	H
5361.300	58.26	-27.43	34.01	51.68	74.00	15.74	H

Channel 106

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17810.200	52.60	-25.50	46.66	31.44	74.00	21.40	V
17401.000	52.38	-26.85	45.25	33.98	68.30	15.92	V
13748.500	49.76	-29.10	40.86	37.99	68.30	18.54	V
13638.500	49.67	-29.50	40.43	38.74	68.30	18.63	V
5459.400	55.10	-27.18	34.17	48.11	74.00	18.90	H
5465.300	55.67	-27.18	34.17	48.68	68.30	12.63	H

Channel 122

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17541.800	52.29	-26.85	45.25	33.89	68.30	16.01	V
17737.700	52.07	-25.50	46.66	30.91	74.00	21.93	V
13596.100	50.01	-29.50	40.43	39.08	68.30	18.29	V
13655.500	49.89	-29.50	40.43	38.96	68.30	18.41	H
5727.600	57.98	-27.07	34.31	50.74	68.30	10.32	H
5725.300	57.30	-27.07	34.31	50.06	68.30	11.00	H

Channel 138

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17865.800	53.19	-25.50	46.66	32.03	74.00	20.81	H
17623.200	52.17	-25.74	45.95	31.96	68.30	16.13	V
13644.500	50.52	-29.50	40.43	39.59	68.30	17.78	H
13563.700	49.77	-29.50	40.43	38.84	68.30	18.53	H
11930.800	47.83	-31.48	39.09	40.22	74.00	26.17	H
11818.500	47.34	-31.85	39.05	40.14	74.00	26.66	H

802.11ax-HT160

Channel 50

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17704.700	52.60	-25.74	45.95	32.39	74.00	21.40	V
17916.400	52.57	-25.50	46.66	31.41	74.00	21.43	V
13543.900	50.06	-29.56	39.99	39.63	68.30	18.24	H
13646.800	49.95	-29.50	40.43	39.02	68.30	18.35	V
5364.000	61.55	-27.43	34.01	54.97	74.00	12.45	H
5381.900	61.16	-27.36	34.09	54.44	74.00	12.84	H

Channel 114

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17764.600	52.88	-25.50	46.66	31.72	74.00	21.12	H
17995.600	52.32	-25.50	46.66	31.16	74.00	21.68	V
13554.400	50.33	-29.56	39.99	39.90	68.30	17.97	H
13732.000	49.95	-29.10	40.86	38.18	68.30	18.35	V
5443.500	54.33	-27.18	34.17	47.34	74.00	19.67	H
5461.400	54.10	-27.18	34.17	47.11	68.30	14.20	H

Measurement Results for UT18a MIMO:
AVERAGE Results:
802.11ax-HT20

Channel 100

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17953.20	42.54	-25.50	46.66	21.38	54.00	11.46	V
17931.80	42.13	-25.50	46.66	20.97	54.00	11.87	H
12524.20	38.49	-31.05	38.99	30.55	54.00	15.51	V
12357.00	38.21	-31.10	38.94	30.37	54.00	15.79	V
5442.00	42.09	-27.18	34.17	35.10	54.00	11.91	V
5392.80	42.01	-27.36	34.09	35.29	54.00	11.99	V

Channel 116

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17939.50	42.18	-25.50	46.66	21.02	54.00	11.82	V
17971.40	41.90	-25.50	46.66	20.74	54.00	12.10	V
12566.50	38.03	-31.05	38.99	30.09	54.00	15.97	V
12572.60	37.94	-31.05	38.99	30.00	54.00	16.06	V
11993.50	36.22	-31.48	39.09	28.61	54.00	17.78	V
11972.00	36.20	-31.48	39.09	28.59	54.00	17.80	H

Channel 140

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17978.00	42.07	-25.50	46.66	20.91	54.00	11.93	H
17958.80	42.02	-25.50	46.66	20.86	54.00	11.98	V
12566.00	38.29	-31.05	38.99	30.35	54.00	15.71	H
12336.10	38.17	-31.10	38.94	30.33	54.00	15.83	H
11986.90	36.48	-31.48	39.09	28.87	54.00	17.52	V
11946.10	36.21	-31.48	39.09	28.60	54.00	17.79	H

Measurement Results for UT18a MIMO:
PEAK Results:
802.11ax-HT20

Channel 100

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17956.00	53.82	-25.50	46.66	32.66	74.00	20.18	V
17979.10	53.05	-25.50	46.66	31.89	74.00	20.95	V
12535.20	49.02	-31.05	38.99	41.08	74.00	24.98	V
14717.00	48.83	-28.32	41.35	35.81	68.30	19.47	V
5351.20	53.97	-27.43	34.01	47.39	74.00	20.03	V
5461.60	52.59	-27.18	34.17	45.60	68.30	15.71	V

Channel 116

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17873.00	52.50	-25.50	46.66	31.34	74.00	21.50	H
17982.40	52.45	-25.50	46.66	31.29	74.00	21.55	V
12495.00	49.33	-31.22	38.91	41.64	74.00	24.67	V
14969.00	48.94	-28.59	40.79	36.74	68.30	19.36	H
11982.50	46.69	-31.48	39.09	39.08	74.00	27.31	H
11748.70	46.40	-31.99	38.98	39.41	74.00	27.60	V

Channel 140

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17915.80	52.55	-25.50	46.66	31.39	74.00	21.45	V
17941.20	52.24	-25.50	46.66	31.08	74.00	21.76	H
12509.40	49.35	-31.22	38.91	41.66	74.00	24.65	V
14832.50	49.28	-28.59	40.79	37.08	68.30	19.02	V
5725.30	59.83	-27.07	34.31	52.59	68.30	8.47	V
5725.10	59.58	-27.07	34.31	52.34	68.30	8.72	V

A.7. AC Powerline Conducted Emission (150kHz- 30MHz)

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement uncertainty:

Expanded measurement uncertainty for this test item is $U = 3.10\text{dB}$, $k=2$.

Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger AE5		
		802.11a	Idle	
0.15 to 0.5	66 to 56	Fig.82	Fig.83	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger AE5		
		802.11a	Idle	
0.15 to 0.5	67 56 to 46	Fig.82	Fig.83	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Conclusion: PASS

Test graphs as below:

Traffic:

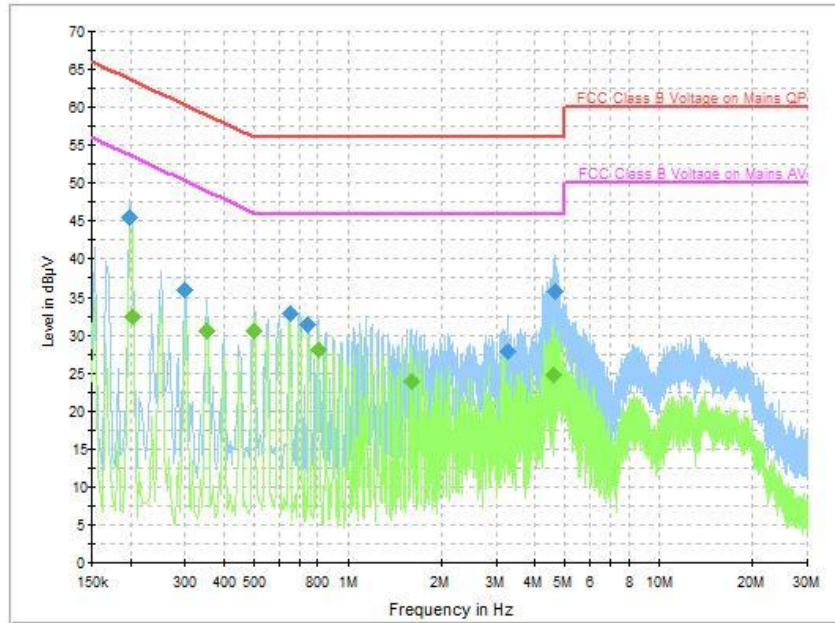


Fig.82 Conducted Emission (802.11a, Ch36, TX)

Note1: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.198000	45.57	5000.0	9.000	On	L1	19.83	18.10	63.70
0.298000	35.90	5000.0	9.000	On	L1	19.81	24.40	60.30
0.650000	32.78	5000.0	9.000	On	N	19.61	23.20	56.00
0.746000	31.47	5000.0	9.000	On	N	19.60	24.50	56.00
3.258000	27.80	5000.0	9.000	On	L1	19.55	28.20	56.00
4.654000	35.81	5000.0	9.000	On	N	19.53	20.20	56.00

Final Result 2

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.202000	32.45	5000.0	9.000	On	N	19.72	21.10	53.50
0.350000	30.58	5000.0	9.000	On	N	19.77	18.40	49.00
0.498000	30.50	5000.0	9.000	On	N	19.85	15.50	46.00
0.802000	28.01	5000.0	9.000	On	N	19.60	18.00	46.00
1.602000	23.82	5000.0	9.000	On	N	19.62	22.20	46.00
4.598000	24.73	5000.0	9.000	On	N	19.52	21.30	46.00

Note2: The measurement results showed here are worst cases .

Idle:

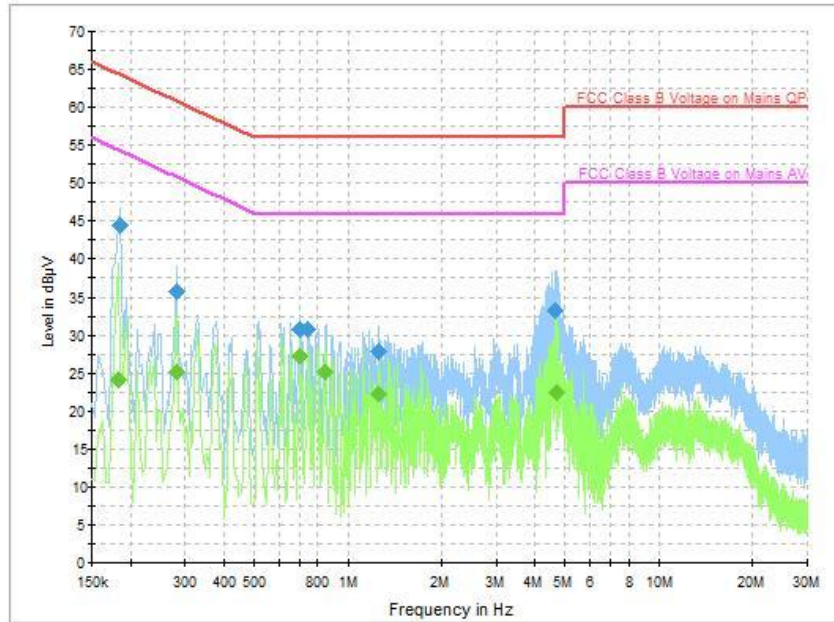


Fig.83 Conducted Emission(802.11a, IDLE)

Note1: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.186000	44.50	5000.0	9.000	On	L1	19.81	19.70	64.20
0.282000	35.83	5000.0	9.000	On	L1	19.82	24.90	60.80
0.702000	30.81	5000.0	9.000	On	N	19.57	25.20	56.00
0.742000	30.80	5000.0	9.000	On	N	19.60	25.20	56.00
1.258000	27.85	5000.0	9.000	On	N	19.60	28.20	56.00
4.650000	33.29	5000.0	9.000	On	L1	19.55	22.70	56.00

Final Result 2

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.182000	24.16	5000.0	9.000	On	L1	19.81	30.20	54.40
0.282000	25.06	5000.0	9.000	On	L1	19.82	25.70	50.80
0.702000	27.23	5000.0	9.000	On	N	19.57	18.80	46.00
0.842000	25.18	5000.0	9.000	On	N	19.58	20.80	46.00
1.258000	22.17	5000.0	9.000	On	N	19.60	23.80	46.00
4.702000	22.53	5000.0	9.000	On	N	19.54	23.50	46.00

A.8. 99% Occupied bandwidth

Method of Measurement: See ANSI C63.10-2013-clause 12.4.2.

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

Measurement Uncertainty:

Measurement Uncertainty	60.80Hz
-------------------------	---------

Measurement Result:

Mode	Frequency	99% Occupied bandwidth (MHz)		conclusion
802.11a	5180 MHz	Fig.84	39.64	P
	5200 MHz	Fig.85	16.72	P
	5240 MHz	Fig.86	16.68	P
802.11ax HE20	5180 MHz	Fig.87	19.24	P
	5200 MHz	Fig.88	19.28	P
	5240 MHz	Fig.89	19.24	P
802.11ax HE40	5190 MHz	Fig.90	38.00	P
	5230 MHz	Fig.91	38.00	P
802.11ax HE80	5210 MHz	Fig.92	77.92	P
802.11ax HE160	5250 MHz	Fig.93	157.44	P

Conclusion: PASS
Test graphs as below:

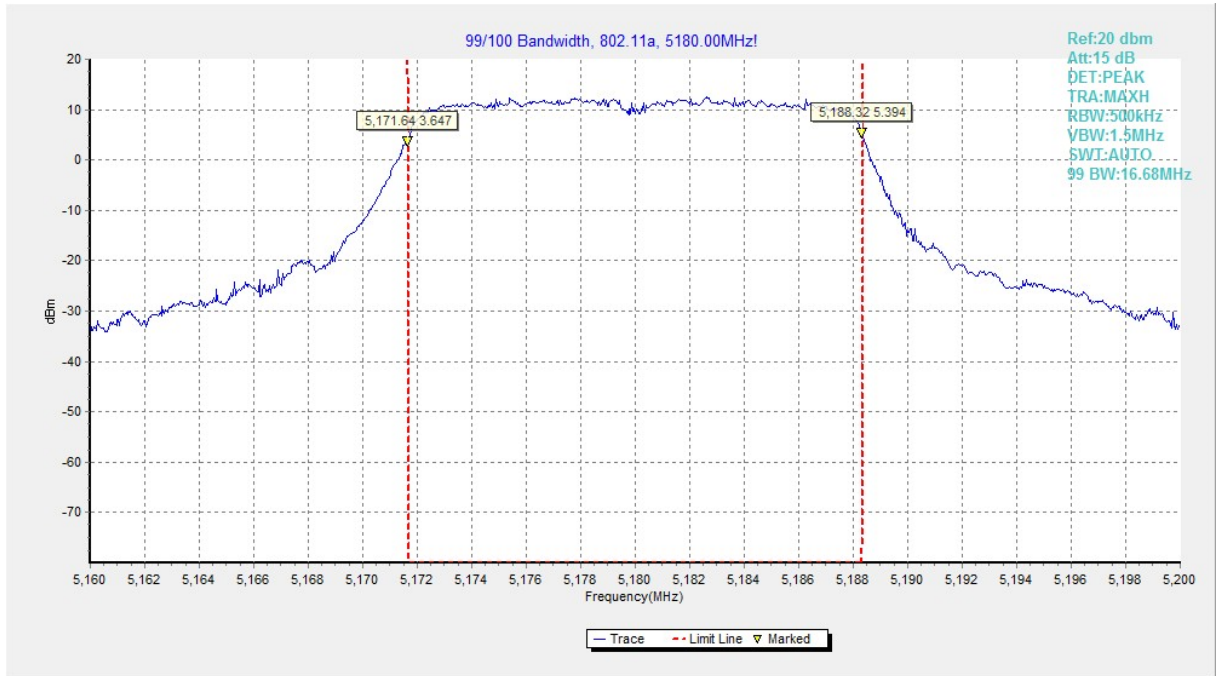


Fig.84 99% Occupied bandwidth (802.11a, 5180MHz)

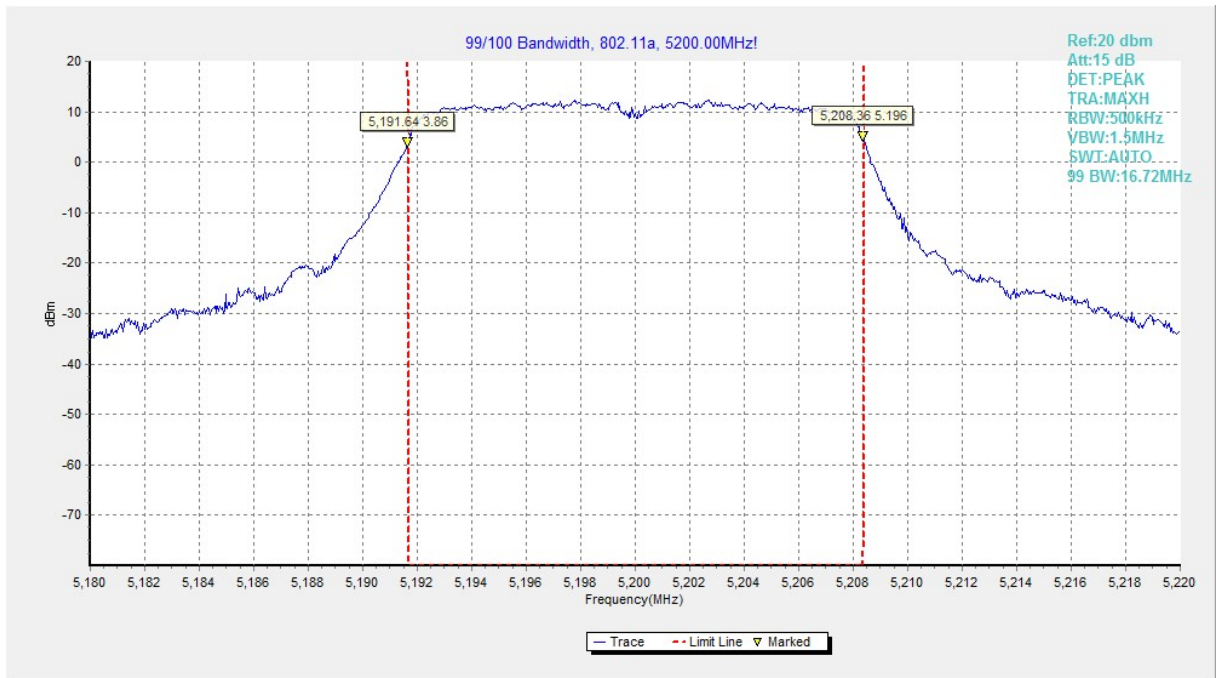


Fig.85 99% Occupied bandwidth (802.11a, 5200MHz)

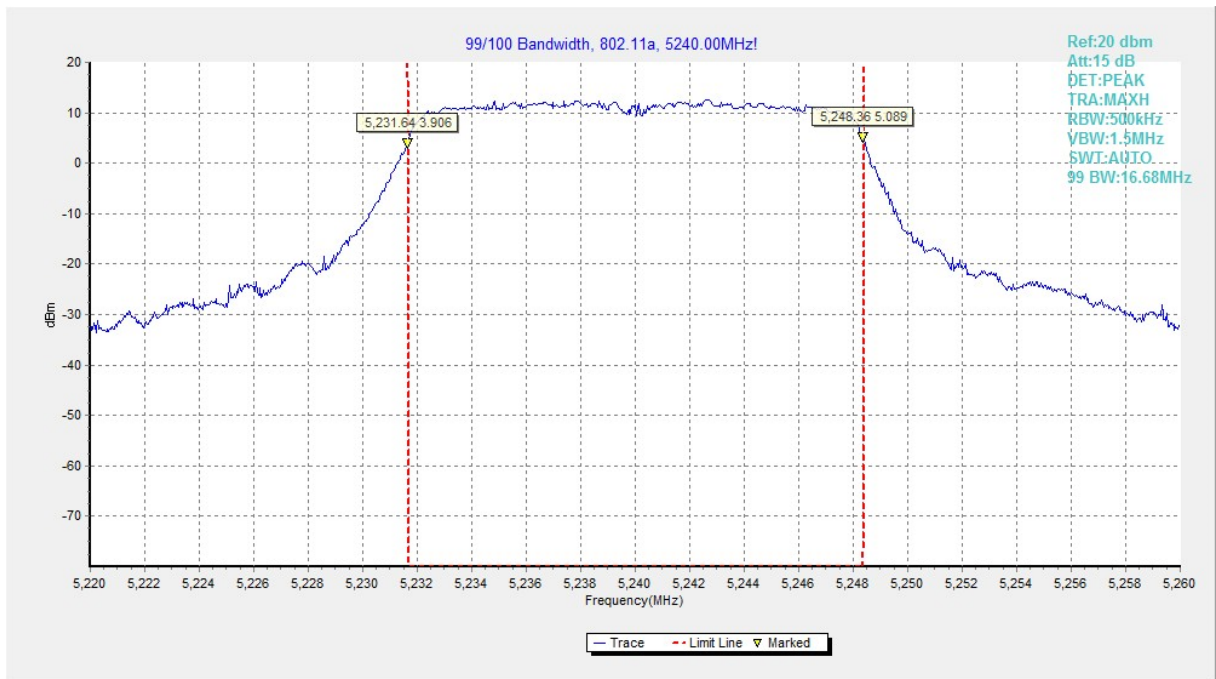


Fig.86 99% Occupied bandwidth (802.11a, 5240MHz)

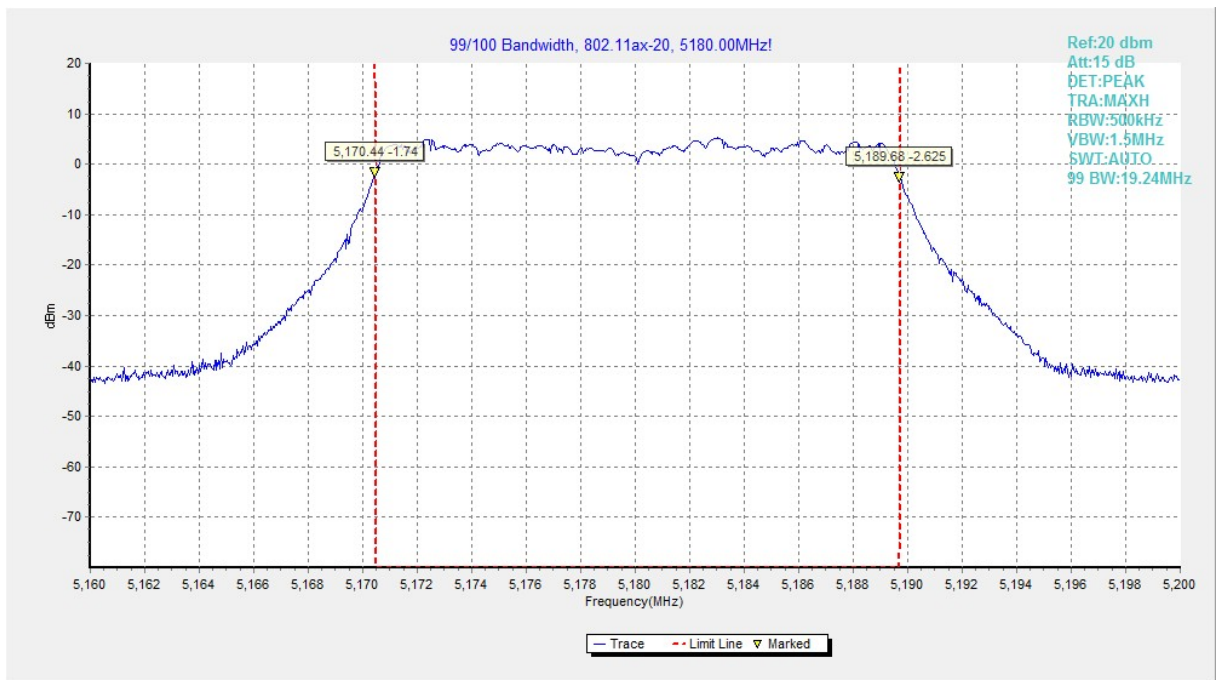


Fig.87 99% Occupied bandwidth (802.11ax-HE20, 5180MHz)

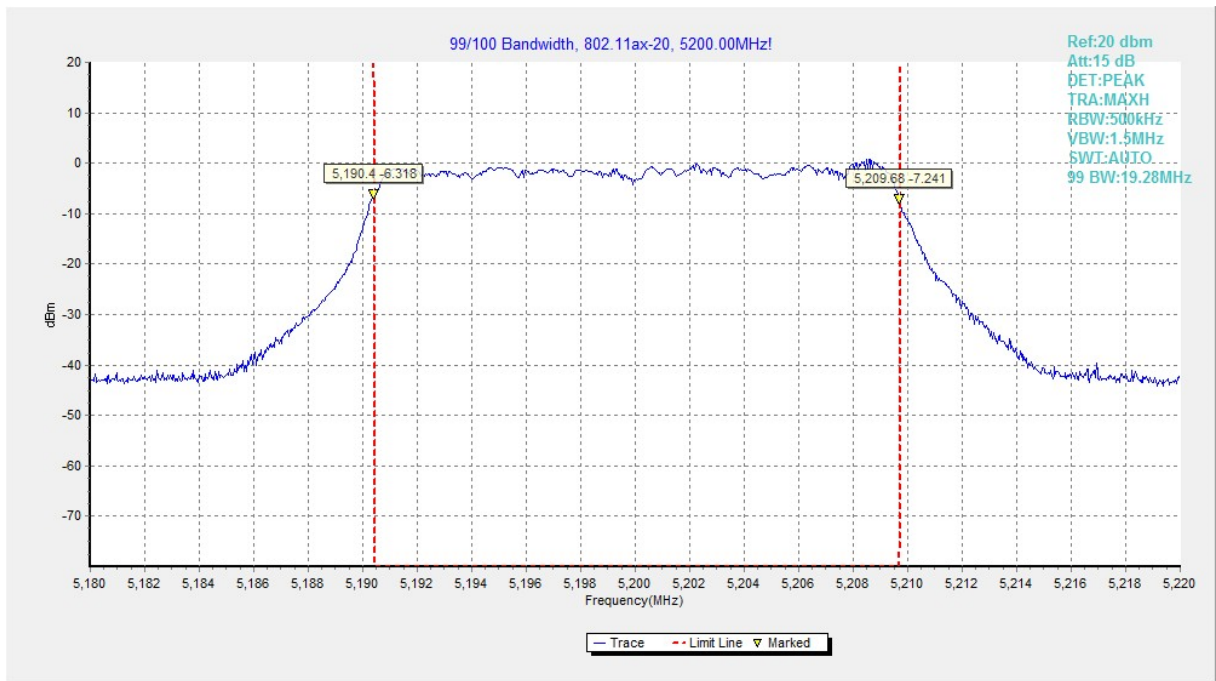


Fig.88 99% Occupied bandwidth (802.11ax-HE20, 5200MHz)

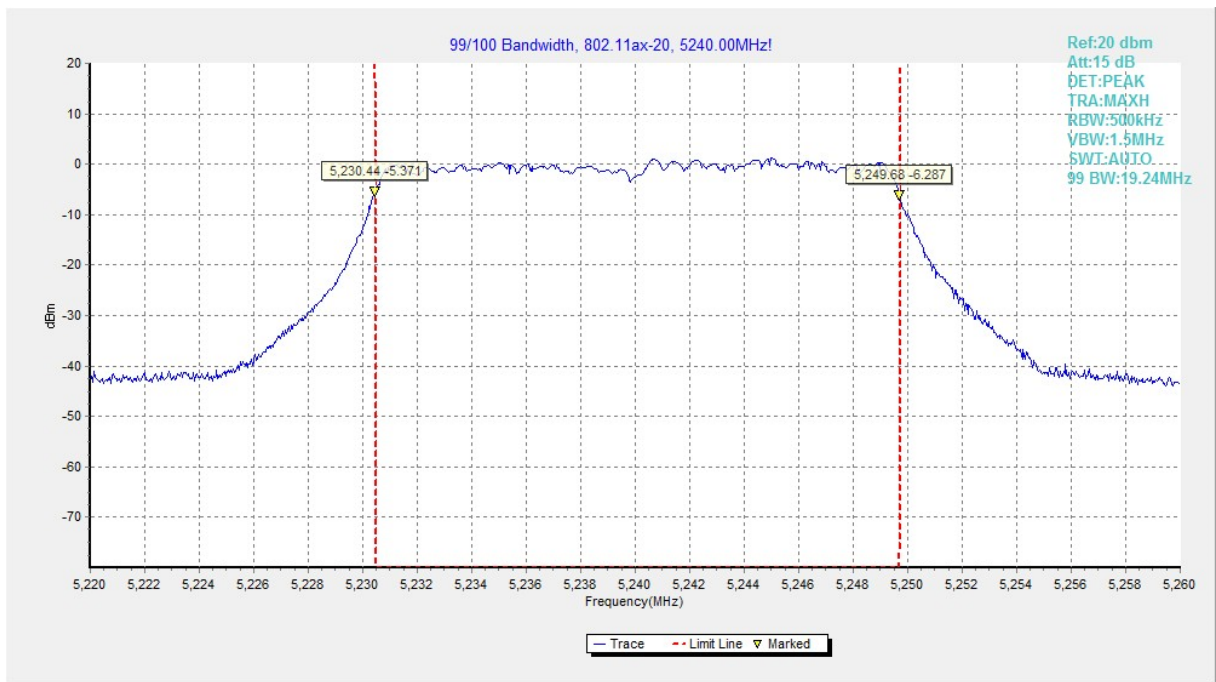


Fig.89 99% Occupied bandwidth (802.11ax-HE20, 5240MHz)

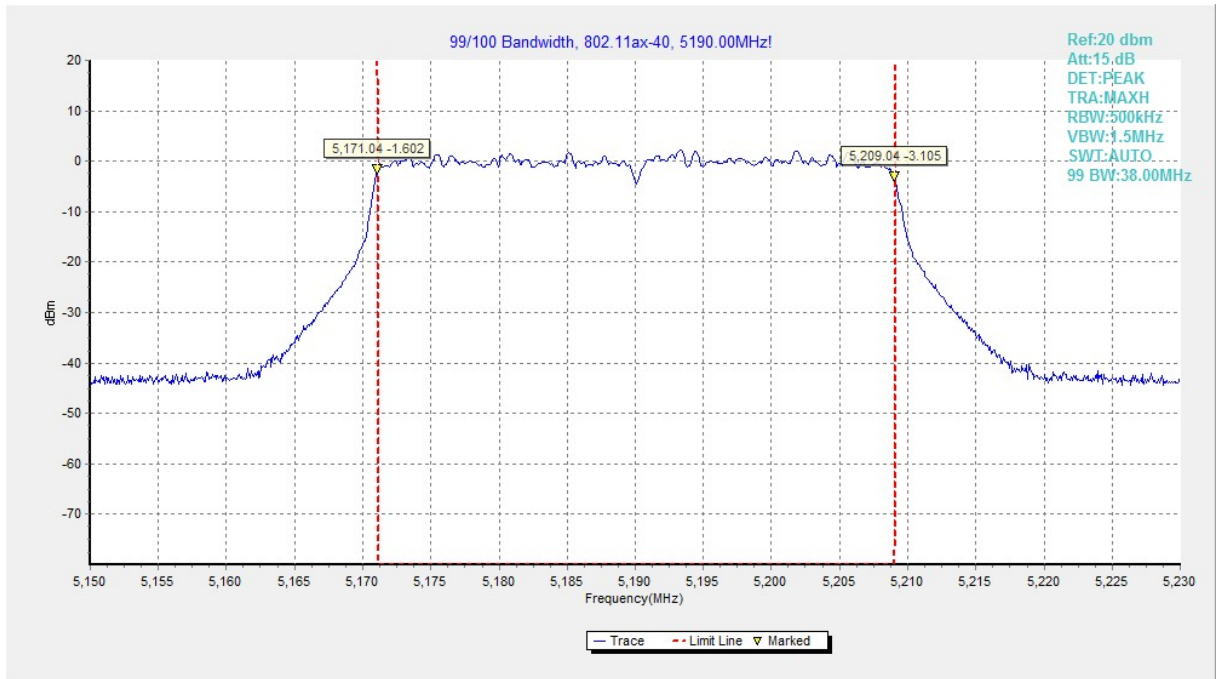


Fig.90 99% Occupied bandwidth (802.11ax-HE40, 5190MHz)

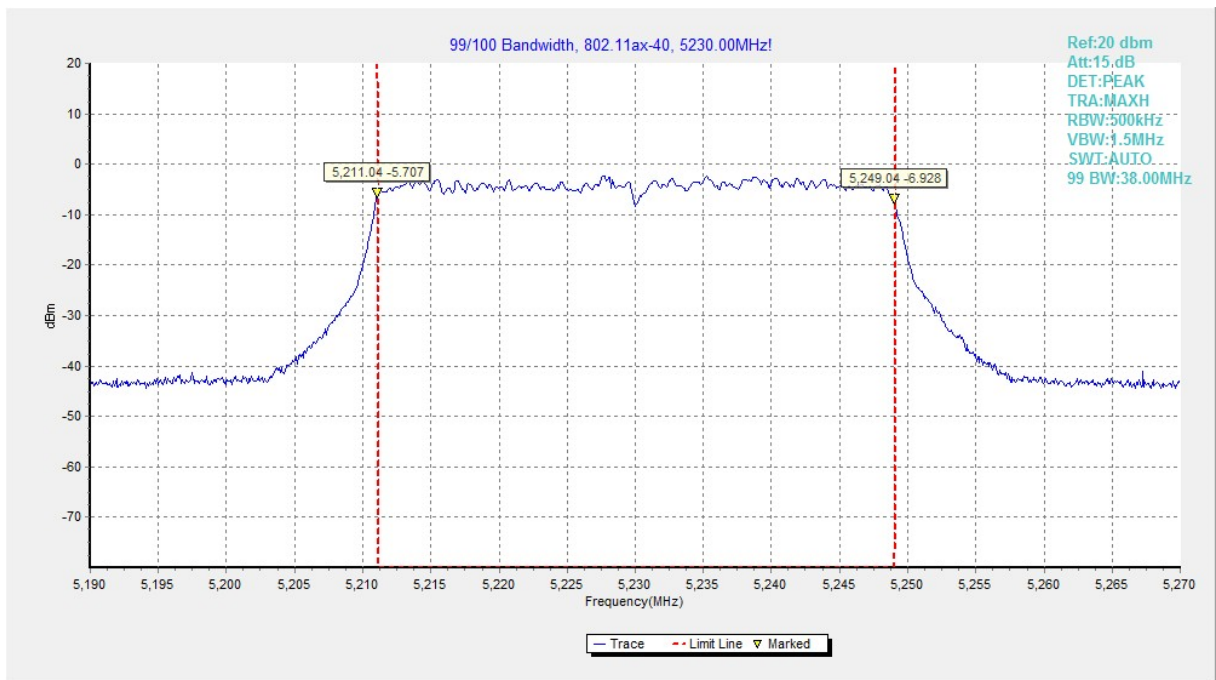


Fig.91 99% Occupied bandwidth (802.11ax-HE40, 5230MHz)

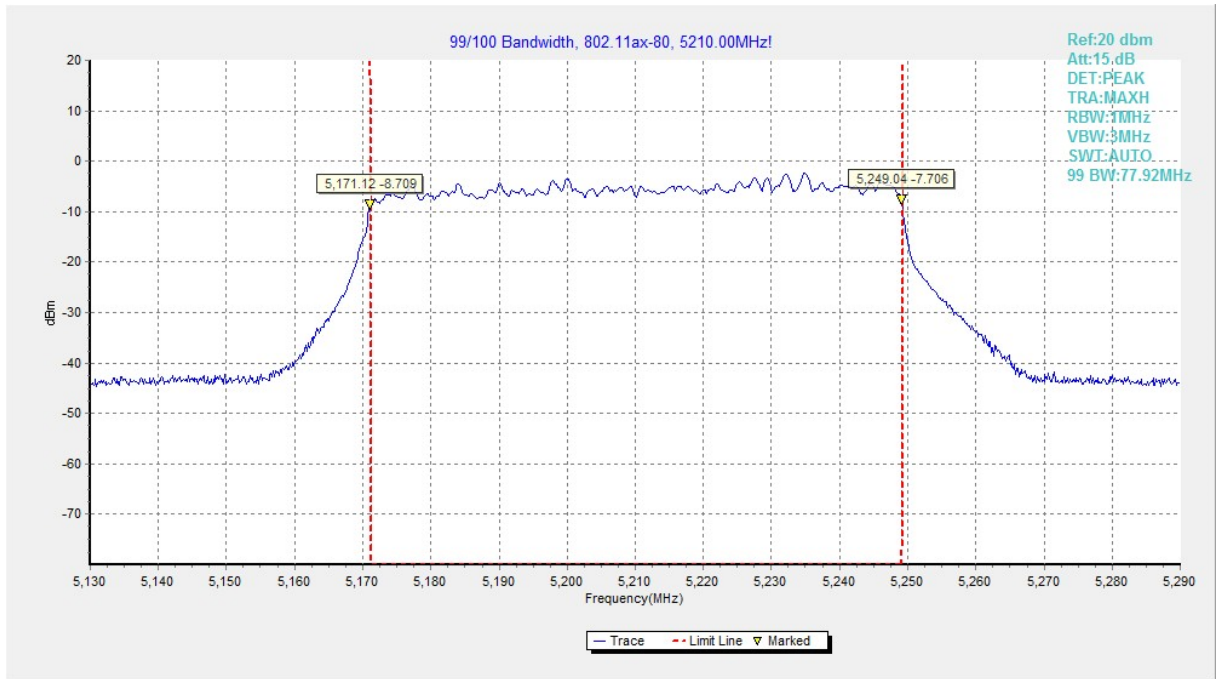


Fig.92 99% Occupied bandwidth (802.11ax-HE80, 5210MHz)

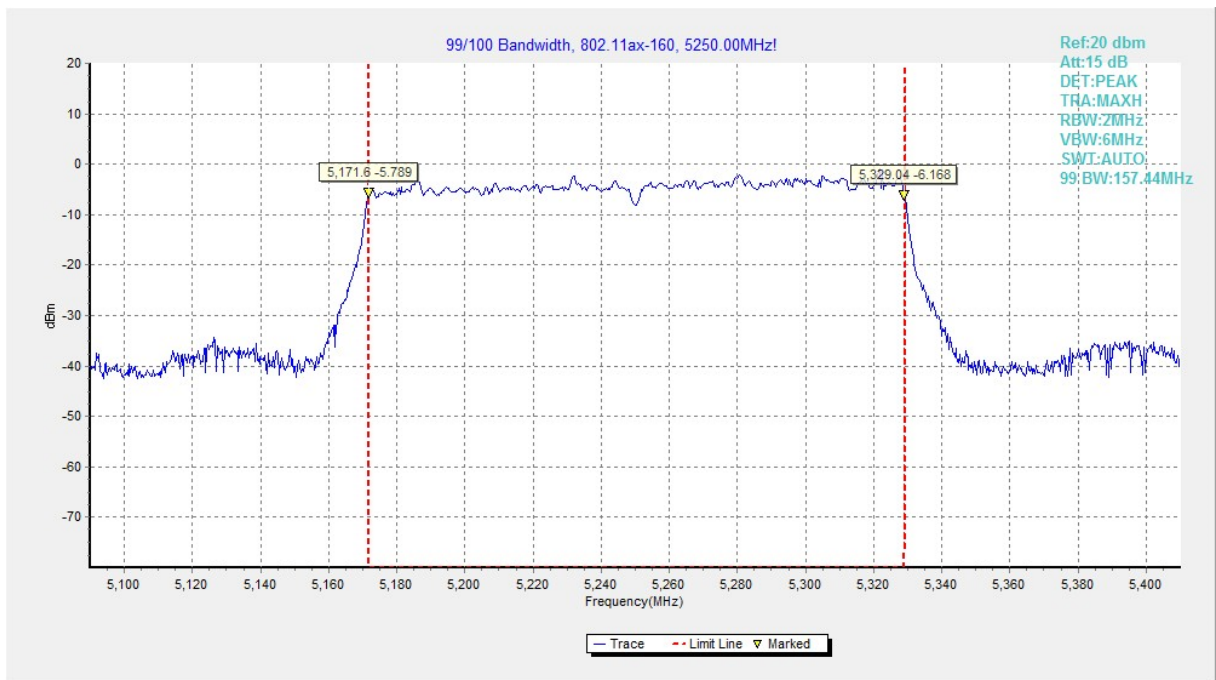


Fig.93 99% Occupied bandwidth (802.11ax-HE160, 5250MHz)

A.9. Power control

A Transmission Power Control mechanism is not required for systems with an e.i.r.p. of less than 27dBm (500 mW).

ANNEX B: EUT parameters

Disclaimer: The antenna gain and worse case provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

ANNEX C: Accreditation Certificate

United States Department of Commerce National Institute of Standards and Technology	
	
<hr/> Certificate of Accreditation to ISO/IEC 17025:2017 <hr/>	
NVLAP LAB CODE: 600118-0	
Telecommunication Technology Labs, CAICT Beijing China	
<i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i>	
Electromagnetic Compatibility & Telecommunications	
<i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i>	
<hr/> 2021-09-29 through 2022-09-30 <i>Effective Dates</i>	 For the National Voluntary Laboratory Accreditation Program

*** END OF REPORT BODY ***