

---

# FCC Test Report

---

Report No.: AGCX2H130101-2F2B

**FCC ID** : RWV19300

**PRODUCT DESIGNATION** : GSM Mobile Phone

**BRAND NAME** : GIGO,SUM,OSC, R.O.M.A.,Y.I.Y.O.

**MODEL NAME** : I9300 , 9300 , S93 , ST93, ST30 , S3

**CLIENT** : Sumtech Industry Development Co., Ltd.

**DATE OF ISSUE** : Jan.31, 2013

**STANDARD(S)** : FCC Part 15 Rules

**REPORT VERSION** : V1.0

**Attestation of Global Compliance (Shenzhen) Co., Ltd.**

**CAUTION:** This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

## VERIFICATION OF COMPLIANCE

<b>Applicant:</b>	Sumtech Industry Development Co., Ltd.
	Room521, Sanjiu Hotel, No.1001 East Shennian Road, Luohu, Shenzhen, China
<b>Manufacturer:</b>	Sumtech Industry Development Co., Ltd.
	Room521, Sanjiu Hotel, No.1001 East Shennian Road, Luohu, Shenzhen, China
<b>Product Designation:</b>	GSM Mobile Phone
<b>Brand Name:</b>	GIGO,SUM,OSC, R.O.M.A.,Y.I.Y.O.
<b>Test Model:</b>	I9300 , 9300 , S93 , ST93, ST30 , S3
<b>Model Difference:</b>	Above models all the same except for model name and brand name.
<b>FCC ID:</b>	RWVI9300
<b>Date of Test:</b>	Jan.28, 2013 to Jan.31, 2013

### WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Tested By: \_\_\_\_\_

Bart Xie

Jan.31, 2013

Reviewed By: \_\_\_\_\_

Forrest Lei

Jan.31, 2013

Approved By: \_\_\_\_\_

Solger Zhang

Jan.31, 2013

## TABLE OF CONTENTS

<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
1.1 PRODUCT DESCRIPTION .....	5
1.2 TABLE OF CARRIER FREQUENCIES.....	5
1.3 RECEIVER INPUT BANDWIDTH .....	6
1.4 EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE .....	7
1.5 EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR.....	7
1.6 RELATED SUBMITTAL(S) / GRANT (S).....	7
1.7 TEST METHODOLOGY .....	7
1.8 MEASUREMENT UNCERTAINTY.....	7
1.9 TEST FACILITY.....	8
1.10 SPECIAL ACCESSORIES .....	8
1.11 EQUIPMENT MODIFICATIONS.....	8
<b>2. SYSTEM TEST CONFIGURATION.....</b>	<b>9</b>
2.1 CONFIGURATION OF TESTED SYSTEM.....	9
2.2 EQUIPMENT USED IN EUT SYSTEM.....	9
<b>3. SUMMARY OF TEST RESULTS .....</b>	<b>10</b>
<b>4. DESCRIPTION OF TEST MODES .....</b>	<b>10</b>
<b>5. PEAK OUTPUT POWER .....</b>	<b>11</b>
5.1 MEASUREMENT PROCEDURE .....	11
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	11
5.3 MEASUREMENT EQUIPMENT USED .....	12
5.4 LIMITS AND MEASUREMENT RESULT .....	12
<b>6. 20 DB BANDWIDTH.....</b>	<b>13</b>
6.1 MEASUREMENT PROCEDURE .....	13
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	13
6.3 MEASUREMENT EQUIPMENT USED .....	13
6.4 LIMITS AND MEASUREMENT RESULTS.....	13
<b>7. CONDUCTED SPURIOUS EMISSION.....</b>	<b>19</b>
7.1 MEASUREMENT PROCEDURE .....	19
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	19
7.3 MEASUREMENT EQUIPMENT USED .....	19
7.4 LIMITS AND MEASUREMENT RESULT .....	19
<b>8. RADIATED EMISSION .....</b>	<b>23</b>
8.1MEASUREMENT PROCEDURE .....	23

8.2 TEST SETUP .....	24
8.3 TEST EQUIPMENT LIST .....	25
8.4 TEST RESULT .....	26
<b>9. BAND EDGES EMISSION .....</b>	<b>30</b>
9.1 MEASUREMENT PROCEDURE .....	30
9.2 TEST SET-UP .....	30
9.3 TEST RESULT .....	30
<b>10. NUMBER OF HOPPING FREQUENCY .....</b>	<b>34</b>
10.1 MEASUREMENT PROCEDURE .....	34
10.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) .....	34
10.3 MEASUREMENT EQUIPMENT USED .....	34
10.4 LIMITS AND MEASUREMENT RESULT .....	34
<b>11. TIME OF OCCUPANCY (DWELL TIME) .....</b>	<b>35</b>
11.1 MEASUREMENT PROCEDURE .....	35
11.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) .....	35
11.3 MEASUREMENT EQUIPMENT USED .....	35
11.4 LIMITS AND MEASUREMENT RESULT .....	35
<b>12. FREQUENCY SEPARATION .....</b>	<b>37</b>
12.1 MEASUREMENT PROCEDURE .....	37
12.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) .....	37
12.3 MEASUREMENT EQUIPMENT USED .....	37
12.4 LIMITS AND MEASUREMENT RESULT .....	37
<b>13. CONDUCTED EMISSION .....</b>	<b>38</b>
13.1 LIMITS OF LINE CONDUCTED EMISSION TEST .....	38
13.2 BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST .....	38
13.3 PROCEDURE OF LINE CONDUCTED EMISSION TEST .....	39
13.4 TEST RESULT OF LINE CONDUCTED EMISSION TEST .....	40
<b>APPENDIX I .....</b>	<b>42</b>
<b>PHOTOGRAPHS OF THE EUT .....</b>	<b>42</b>
<b>APPENDIX II .....</b>	<b>49</b>
<b>PHOTOGRAPHS OF THE TEST SETUP .....</b>	<b>49</b>

## 1. GENERAL INFORMATION

### 1.1 PRODUCT DESCRIPTION

The EUT is a GSM Mobile Phone designed as a “Communication Device”. It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following:

Operation Frequency	2.402 GHz to 2.480GHz
Max. Output Power	2.84dBm for GFSK modulation
Bluetooth Version	V2.1 with EDR
Modulation	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Number of channels	79
Antenna Designation	Integrated Antenna
Antenna Gain	0.8dBi
Power Supply	DC3.7V by Built-in Li-ion Battery

### 1.2 TABLE OF CARRIER FREQUENCIES

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2403MHZ
	:	:
	38	2440 MHZ
	39	2441 MHZ
	40	2442 MHZ
	:	:
	77	2479 MHZ
	78	2480 MHZ

### 1.3 RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1.3MHz. In every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection (e.g. single or multisport (packet)) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings.

Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be sent on the same frequency, it is sent on the next frequency of the hopping sequence.

#### 1.4 EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE

Example of a 79 hopping sequence in data mode:

40,21,44,23,42,53,46,55,48,33,52,35,50,65,54,67  
56,37,60,39,58,69,62,71,64,25,68,27,66,57,70,59  
72,29,76,31,74,61,78,63,01,41,05,43,03,73,07,75  
09,45,13,47,11,77,15,00,64,49,66,53,68,02,70,06  
01,51,03,55,05,04

#### 1.5 EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values:

1 LAP/UAP of the master of the connection

2 Internal master clock

The LAP(lower address part) are the 24 LSB's of the 48 BD\_ADDRESS. The BD\_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP(upper address part) are the 24MSB's of the 48BD\_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For synchronization with other units only offset are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about One day(23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire.

LAP(24 bits), 4LSB's(4bits)(Input 1) and the 27MSB's of the clock(Input 2) are used. With this input values different mathematical procedures(permutations, additions, XOR-operations)are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:

The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended.

The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer(and it Cannot be shorter)than the minimum resolution of the clock(312.5us). The hopping sequence will always Differ from the first one.

#### 1.6 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: RWVI9300**, filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

#### 1.7 TEST METHODOLOGY

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

#### 1.8 MEASUREMENT UNCERTAINTY

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

- Uncertainty of Conducted Emission,  $U_c = \pm 2.75\text{dB}$
- Uncertainty of Radiated Emission,  $U_c = \pm 3.2\text{dB}$

## **1.9 TEST FACILITY**

All measurement facilities used to collect the measurement data are located at Attestation of Global Compliance (Shenzhen) Co., Ltd.

2/F., Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003.

FCC register No.: 259865

## **1.10 SPECIAL ACCESSORIES**

Refer to section 2.2.


## **1.11 EQUIPMENT MODIFICATIONS**

Not available for this EUT intended for grant.



## 2. SYSTEM TEST CONFIGURATION

### 2.1 CONFIGURATION OF TESTED SYSTEM Configure

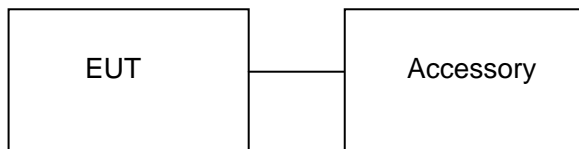

*Note: No software used to control the EUT for staying in continuous transmitting mode for testing.*

### 2.2 EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Note
1	GSM Mobile Phone	I9300	FCC ID: RWVI9300	EUT
2	Adapter	I9300	DC 5.0V / 500mA	Accessory
3	Battery	BL-4U	DC 3.7V/ 1000mAh	Accessory
4	Earphone	I9300	N/A	Accessory
5	USB Cable	N/A	N/A	Accessory

### 3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247	Peak Output Power	Compliant
§15.247	20 dB Bandwidth	Compliant
§15.247	Conducted Spurious Emission	Compliant
§15.207	Conduction Emission	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Band Edges	Compliant
§15.247	Number of Hopping Frequency	Compliant
§15.247	Time of Occupancy	Compliant
§15.247	Frequency Separation	Compliant

### 4. DESCRIPTION OF TEST MODES

The following operating modes were applied for the related test items. For Conducted Emission and Radiated Emission, 3 axis were chosen for testing for each applicable modes.

No.	TEST MODES
1	Low Channel(TX)
2	Middle Channel(TX)
3	High Channel(TX)
4	Normal Hopping

**\*\*Note:**


1. Low, middle, high channel TX for the modulation of GFSK,  $\pi/4$ -DQPSK, 8DPSK.
2. All the test modes can be supply by Built-in Li-ion battery, and the battery is full filled, only the result of the worst case was recorded in the report.

## 5. PEAK OUTPUT POWER

### 5.1 MEASUREMENT PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Connect EUT RF output port to the Power meter.
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually

### 5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

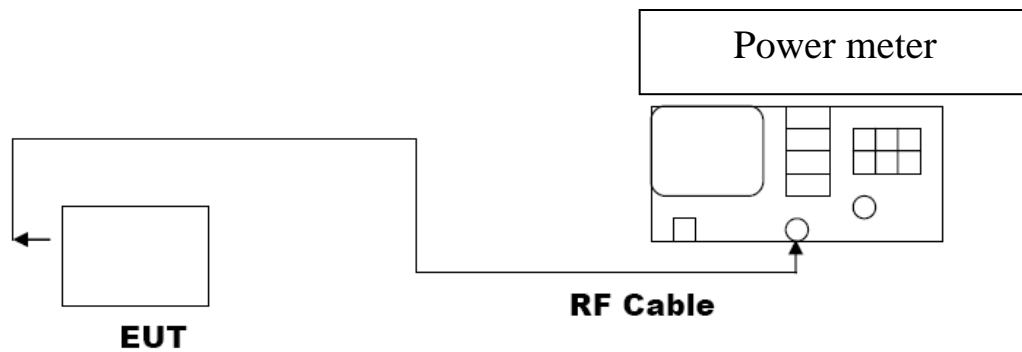

### 5.3 MEASUREMENT EQUIPMENT USED

Description	Manufacturer	Model	SERIAL NUMBER	Cal. Date	Cal. Due
Power meter	R&S	NRP-Z23	N/A	07/18/2012	07/17/2013

### 5.4 LIMITS AND MEASUREMENT RESULT

PEAK OUTPUT POWER MEASUREMENT RESULT FOR GFSK MODULATION			
Frequency (GHz)	Result (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	2.84	30	Pass
2.441	2.79	30	Pass
2.480	2.65	30	Pass


PEAK OUTPUT POWER MEASUREMENT RESULT FOR $\pi/4$ -DQPSK, 8-DPSK MODULATION				
Frequency (GHz)	Test Result 2 Mbps (dBm)	Test Result 3 Mbps (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	2.57	2.37	30	Pass
2.441	2.51	2.33	30	Pass
2.480	2.43	2.28	30	Pass

## 6. 20 dB BANDWIDTH

### 6.1 MEASUREMENT PROCEDURE

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
4. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel  
RBW  $\geq$  1% of the 20 dB bandwidth, VBW  $\geq$  RBW; Sweep = auto; Detector function = peak
5. Set SPA Trace 1 Max hold, then View.

### 6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

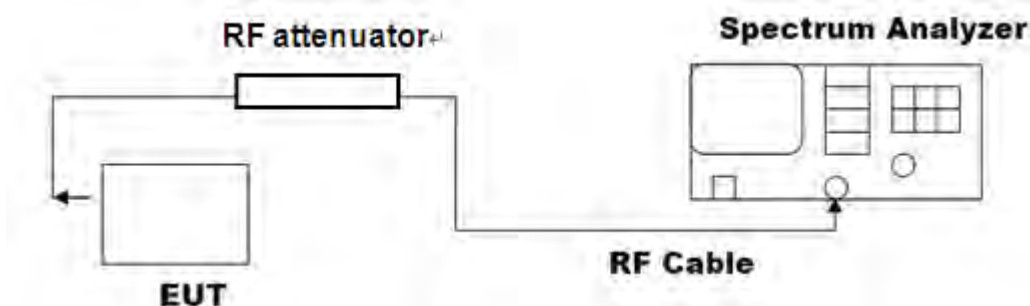

### 6.3 MEASUREMENT EQUIPMENT USED

Description	Manufacturer	Model	SERIAL NUMBER	Cal. Date	Cal. Due
Spectrum Analyzer	Agilent	E4440A	N/A	07/18/2012	07/17/2013
RF attenuator	N/A	RFA20db	N/A	N/A	N/A


### 6.4 LIMITS AND MEASUREMENT RESULTS

LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result(1Mbps)		
	Test Data (MHz)		Criteria
N/A	Low Channel	0.692	PASS
	Middle Channel	0.688	PASS
	High Channel	0.689	PASS


LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result(2Mbps)		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.134	PASS
	Middle Channel	1.096	PASS
	High Channel	1.094	PASS

LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result(3Mbps)		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.155	PASS
	Middle Channel	1.099	PASS
	High Channel	1.133	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL (1Mbps)

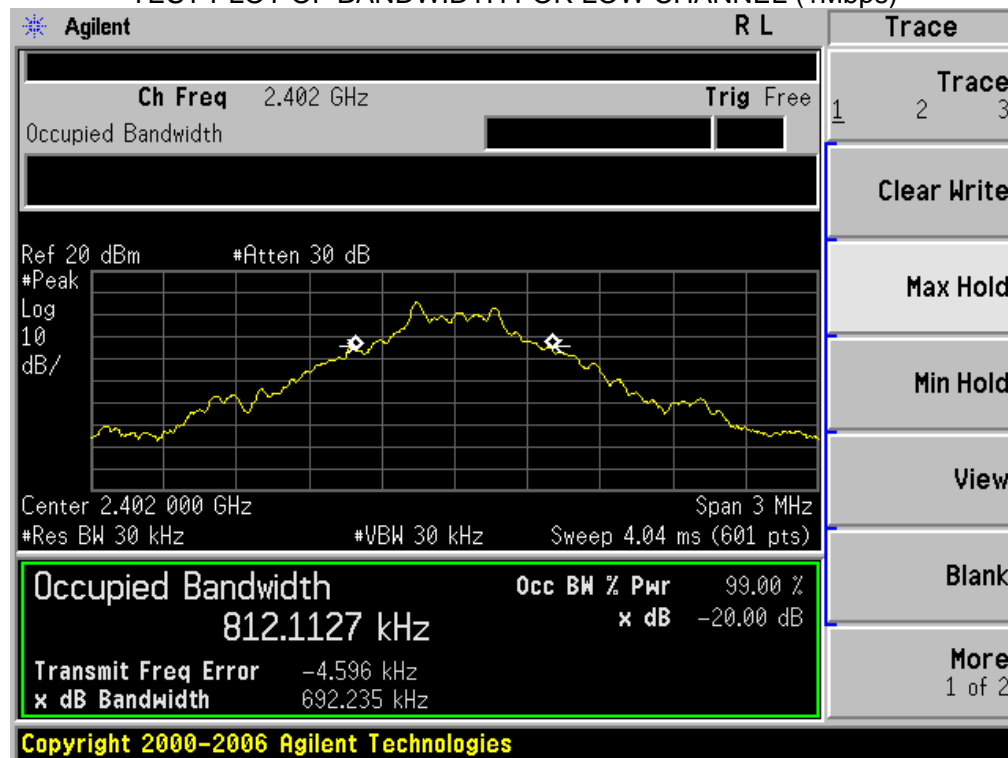

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL (1Mbps)

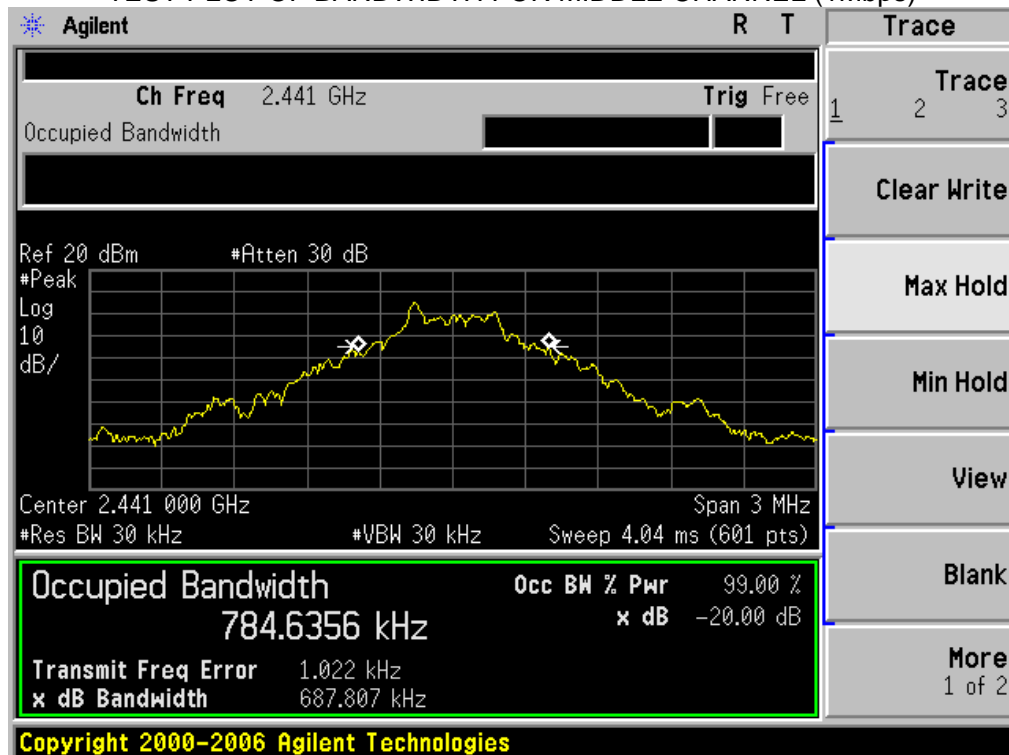


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL (1Mbps)

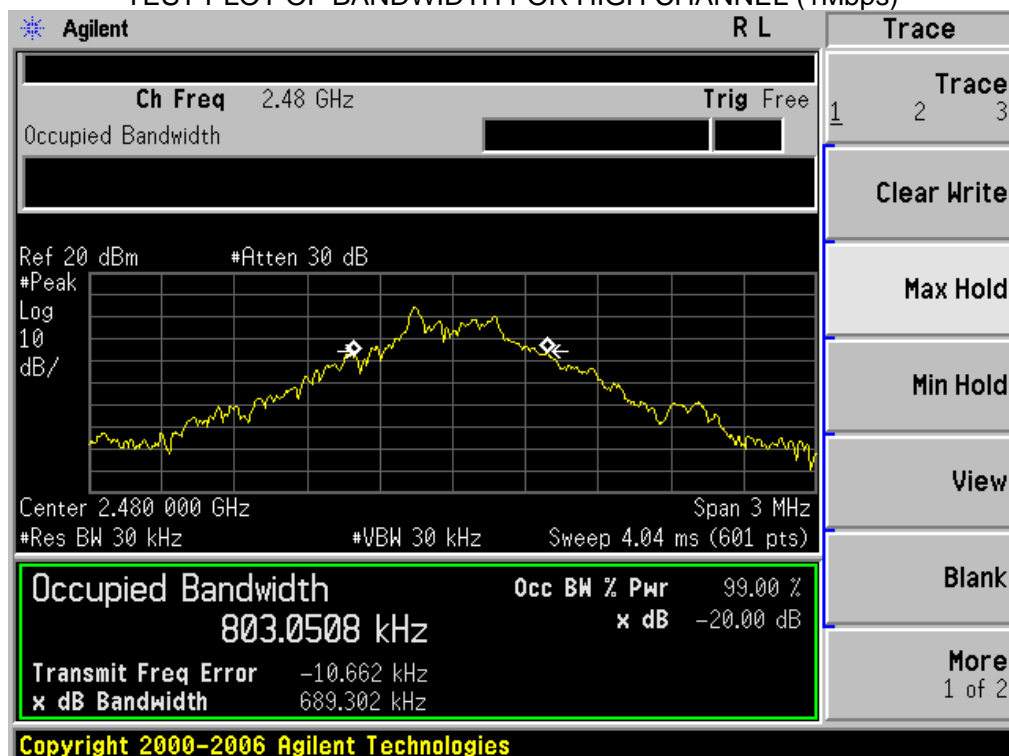

### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL (2Mbps)



### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL (2Mbps)

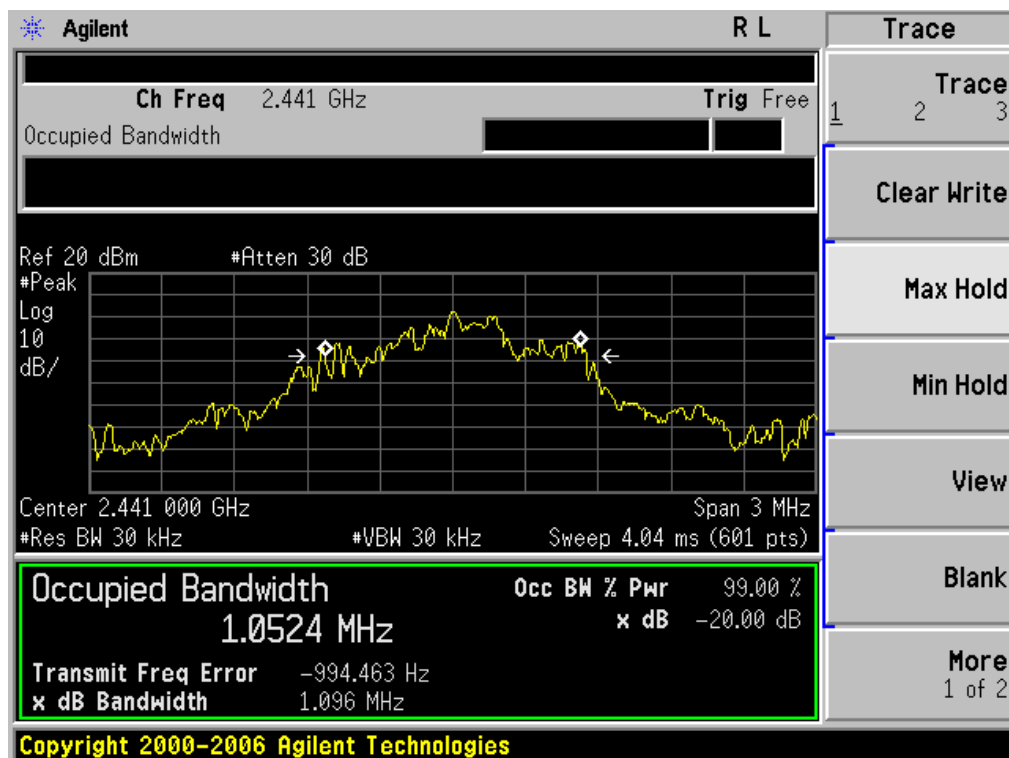




### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL (2Mbps)




### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL (3Mbps)

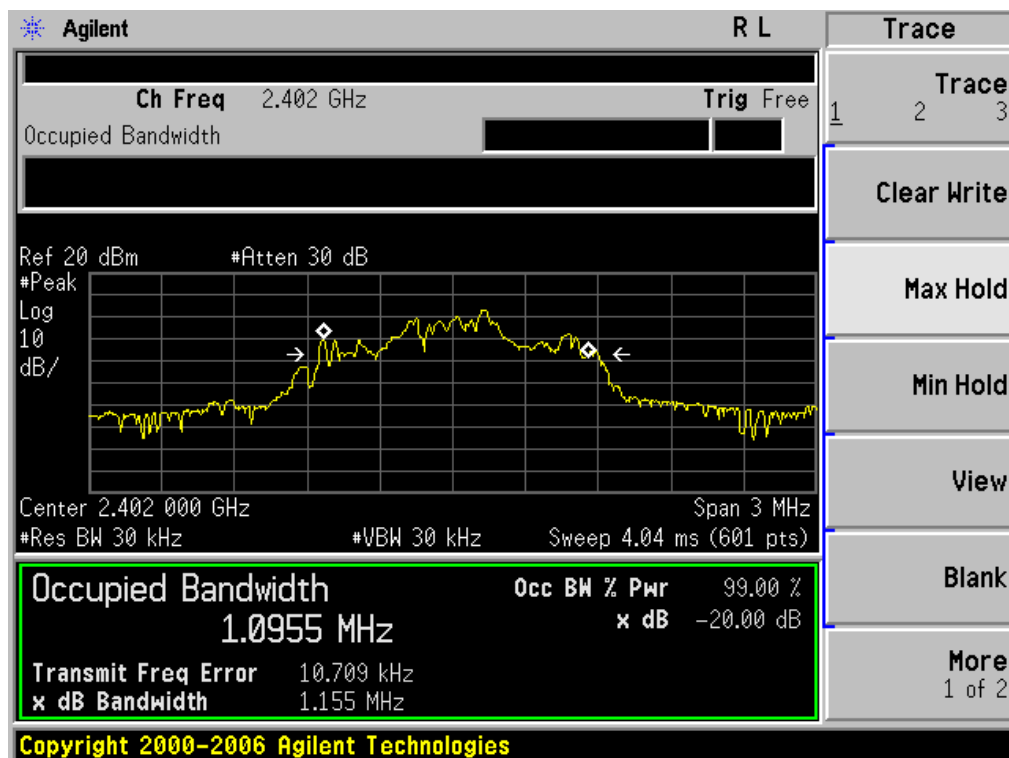

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL (3Mbps)



TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL (3Mbps)

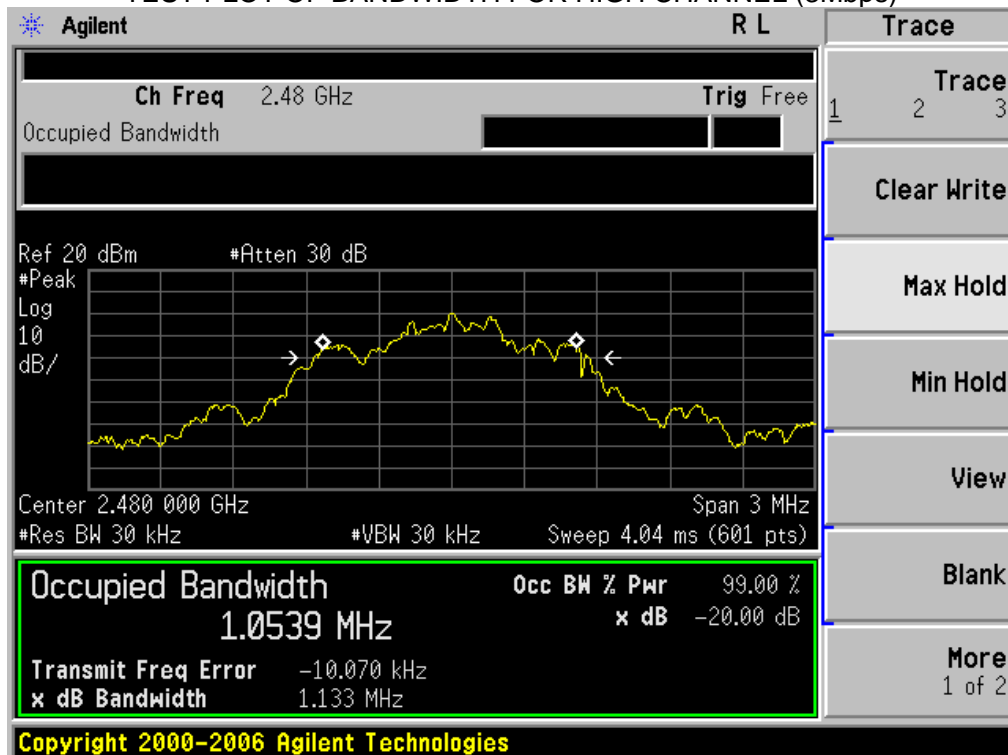

## 7. CONDUCTED SPURIOUS EMISSION

### 7.1 MEASUREMENT PROCEDURE

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
4. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.  
RBW = 100 kHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak.
5. Set SPA Trace 1 Max hold, then View.

### 7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)



The same as described in section 6.2

### 7.3 MEASUREMENT EQUIPMENT USED



The same as described in section 6.3

### 7.4 LIMITS AND MEASUREMENT RESULT



LIMITS AND MEASUREMENT RESULT		
Applicable Limits	Measurement Result	
	Test Data	Criteria
In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.	At least -20dBc than the limit Specified on the BOTTOM Channel	PASS
In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit Specified on the TOP Channel	PASS

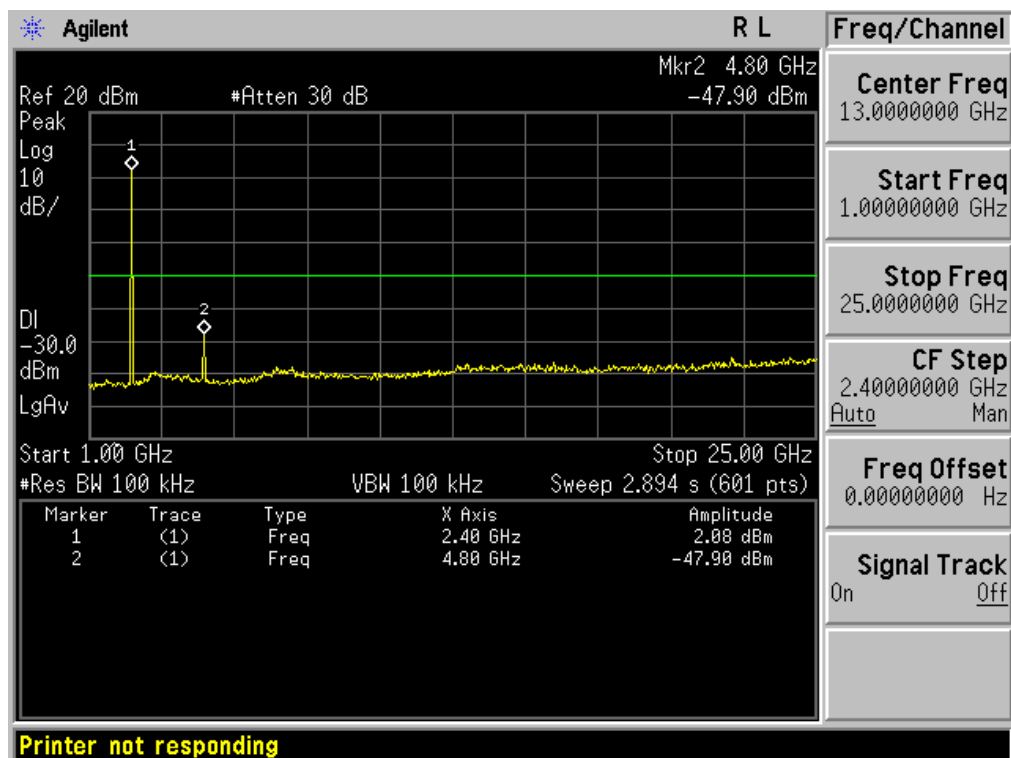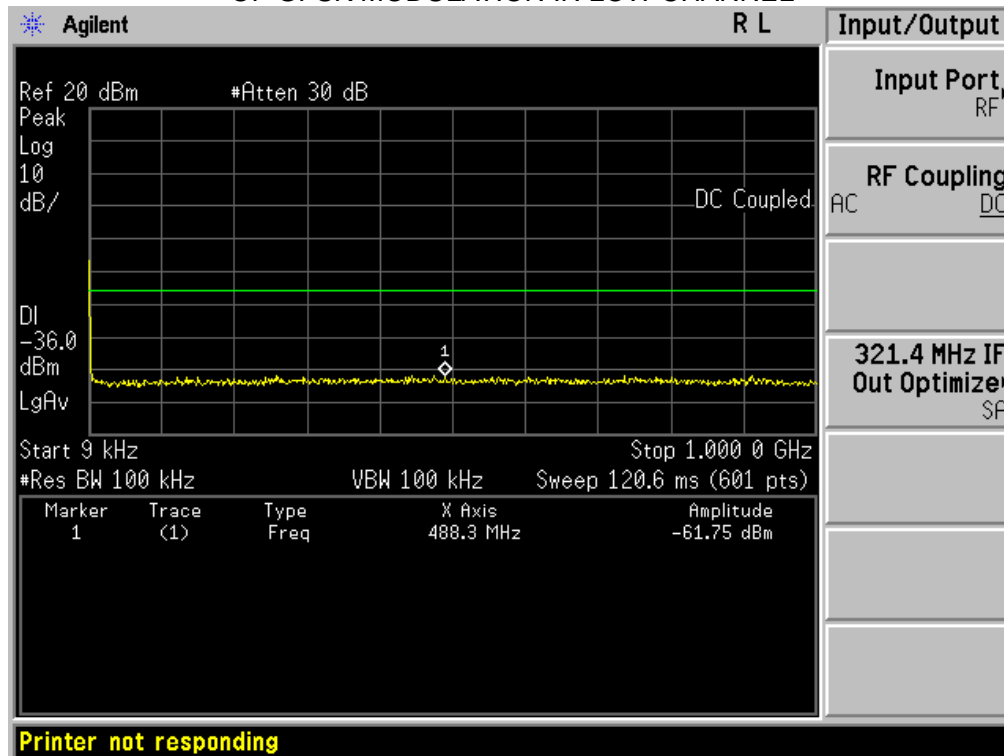TEST PLOT OF OUT OF BAND EMISSIONS  
OF GFSK MODULATION IN LOW CHANNEL

# TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN MIDDLE CHANNEL

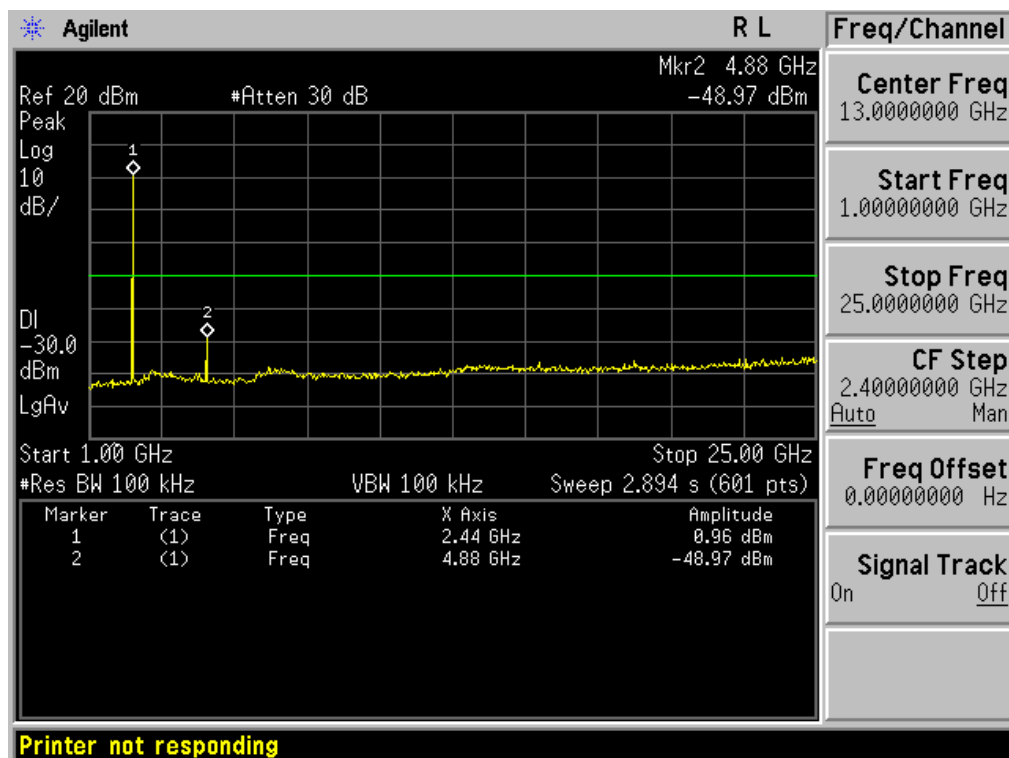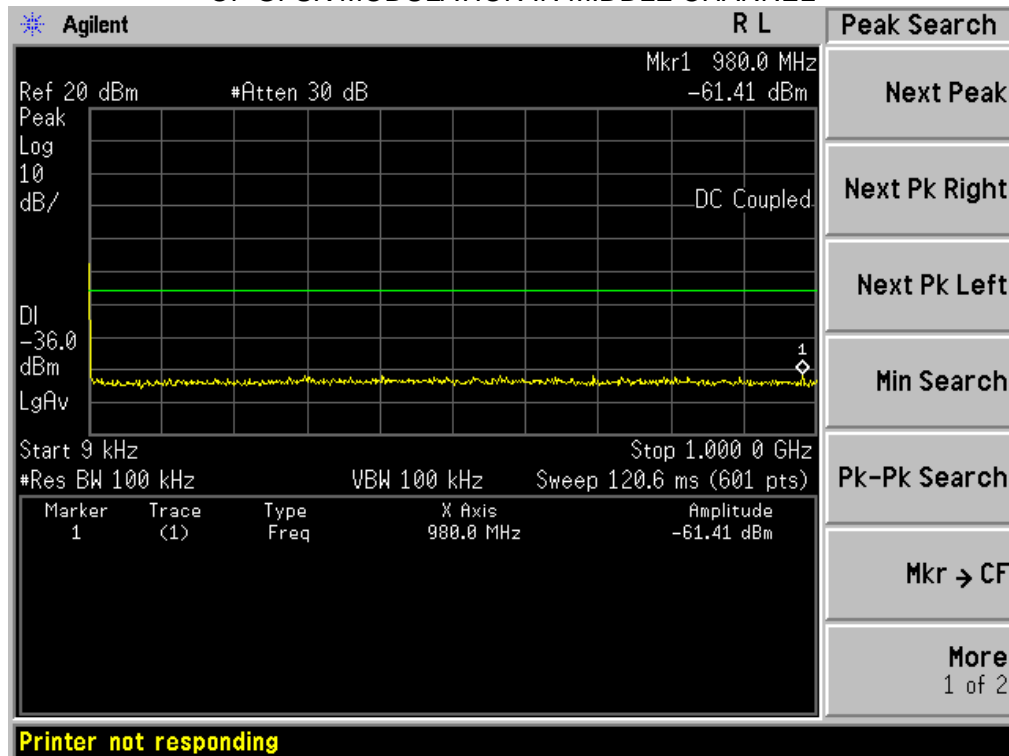

# TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN HIGH CHANNEL

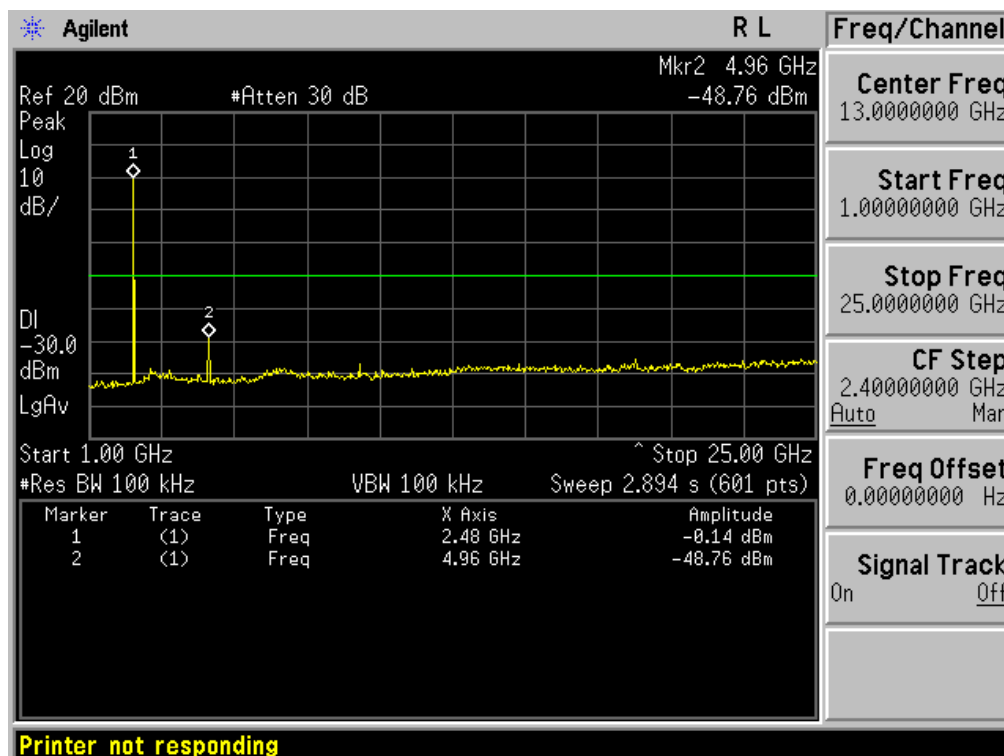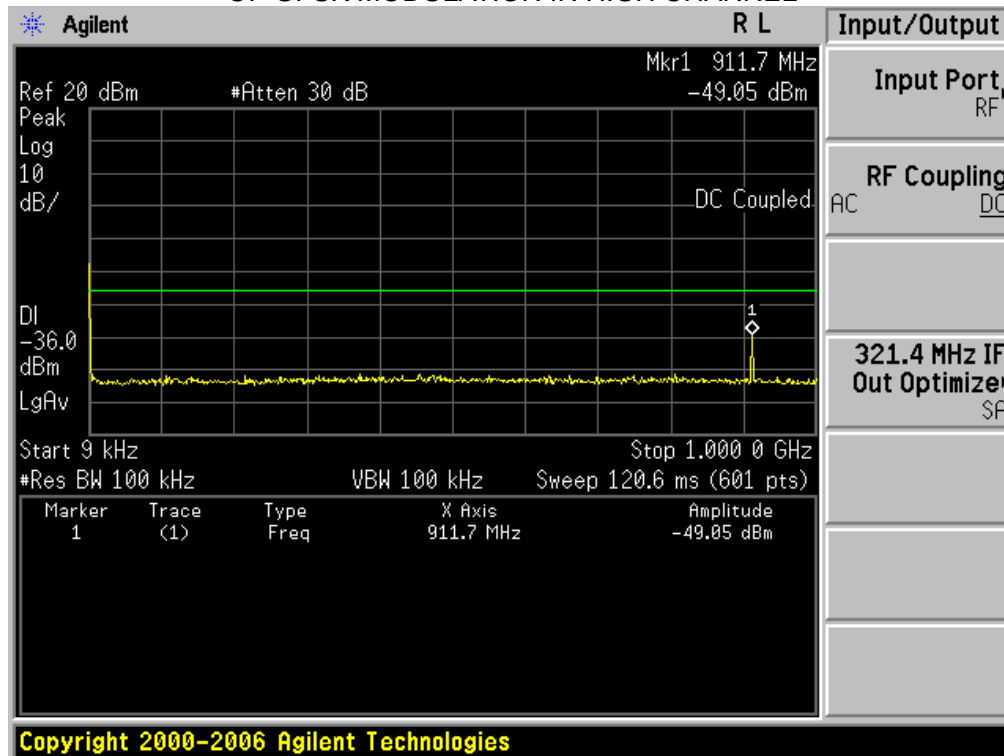

## **8. RADIATED EMISSION**

### **8.1 MEASUREMENT PROCEDURE**

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.


The following table is the setting of spectrum analyzer and receiver.'

Spectrum Parameter	Setting
Start Frequency	1GHz
Stop Frequency	26.5GHz
RB/VB(Emission in restricted band)	1MHz/1MHz for Peak, 1MHz/10Hz for Average
RB/VB(Emission in non-restricted band)	1MHz/1MHz for Peak

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP


## 8.2 TEST SETUP

### RADIATED EMISSION TEST SETUP BELOW 30MHz

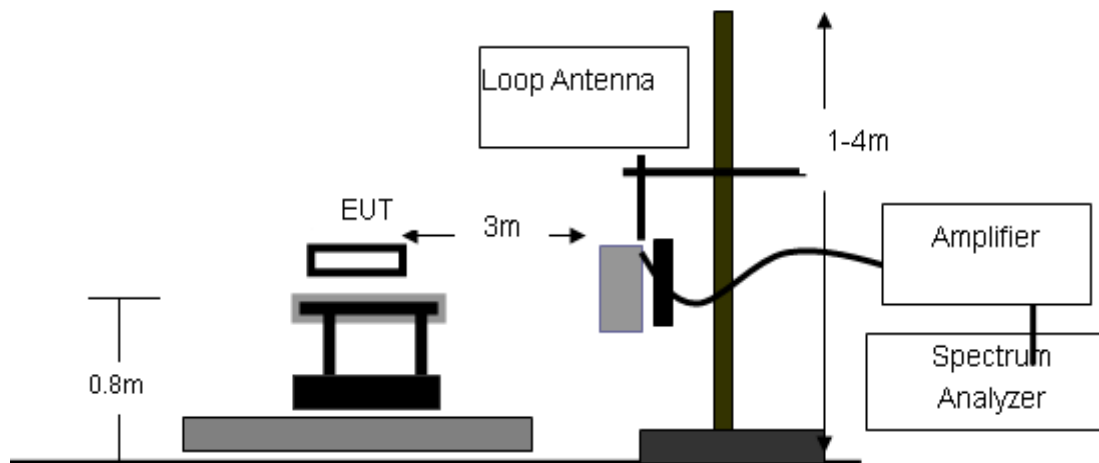




RADIATED EMISSION TEST SETUP 30MHz-1000MHz

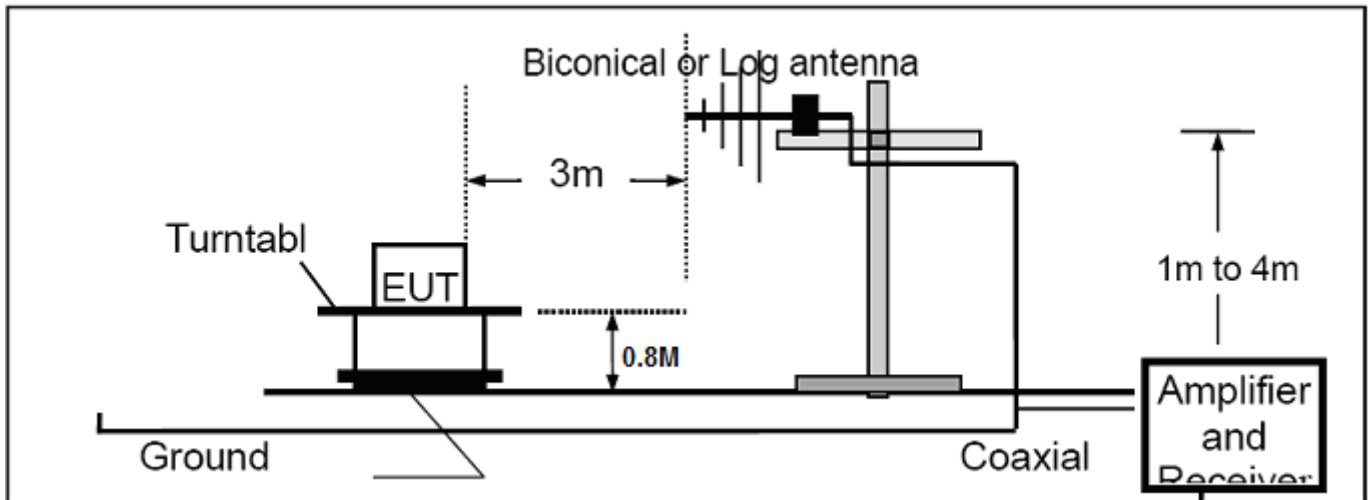

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

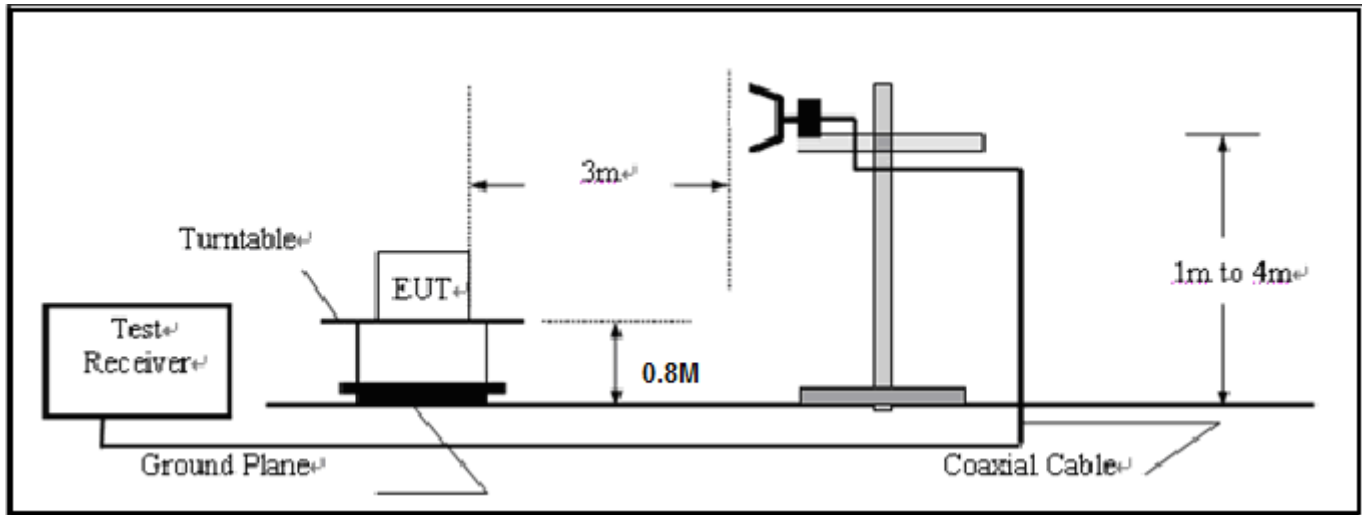

### 8.3 TEST EQUIPMENT LIST

Description	Manufacturer	Model	SERIAL NUMBER	Cal. Date	Cal. Due
Spectrum Analyzer	Agilent	E4440A	N/A	07/18/2012	07/17/2013
Horn Antenna	EM	EM-AH-10180	N/A	07/18/2012	07/17/2013
Horn Antenna	A.H. Systems Inc.	SAS-574	--	07/18/2012	07/17/2013
EMI Test Receiver	Rohde & Schwarz	ESCI	N/A	07/18/2012	07/17/2013
Amplifier	EM	EM30180	N/A	07/18/2012	07/17/2013
Biological Antenna	A.H. Systems Inc.	SAS-521-4	N/A	07/18/2012	07/17/2013
Loop Antenna	Daze	ZN30900N	SEL0097	07/18/2012	07/17/2013
Isolation Transformer	LETEAC	LTBK	--	07/18/2012	07/17/2013


## 8.4 TEST RESULT

The worst case is Normal Hopping Mode.

### RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

### RADIATED EMISSION BELOW 1GHZ

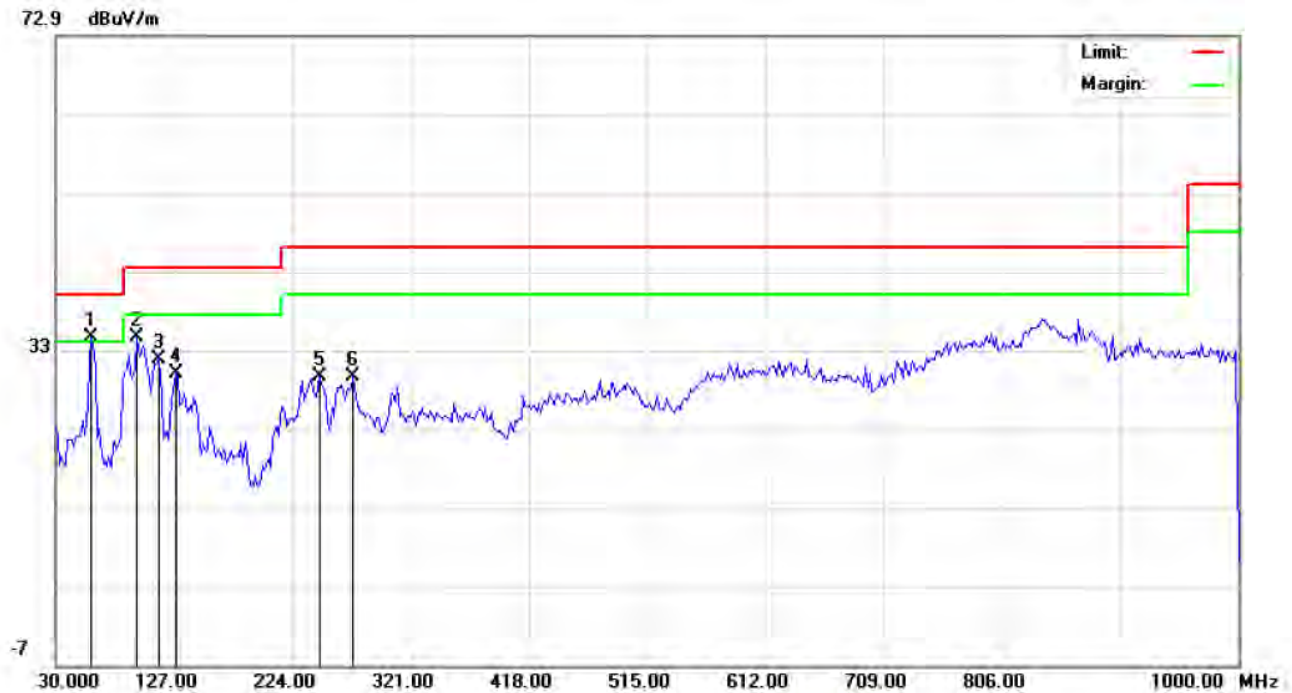

Site: site #1	Polarization: <b>Horizontal</b>	Temperature: 26
Limit: FCC Class B 3M Radiation	Power: AC 120V/60Hz	Humidity: 60 %
EUT: GSM Mobile Phone	Distance: 3m	
M/N: I9300		
Mode: Normal Hopping		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	59.1000	30.92	3.63	34.55	40.00	-5.45	peak			
2		96.2833	20.39	14.16	34.55	43.50	-8.95	peak			
3		114.0667	19.53	12.23	31.76	43.50	-11.74	peak			
4		128.6167	16.15	13.89	30.04	43.50	-13.46	peak			
5		246.6333	19.47	10.14	29.61	46.00	-16.39	peak			
6		274.1167	12.30	17.21	29.51	46.00	-16.49	peak			




Site: site #1  
Limit: FCC Class B 3M Radiation  
EUT: GSM Mobile Phone  
M/N: I9300  
Mode: Normal Hopping  
Note:

Polarization: **Vertical**  
Power: AC 120V/60Hz  
Distance: 3m

Temperature: 26  
Humidity: 60 %


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	46.1667	31.08	4.19	35.27	40.00	-4.73	peak			
2		104.3667	24.19	9.00	33.19	43.50	-10.31	peak			
3		148.0166	15.96	13.72	29.68	43.50	-13.82	peak			
4		238.5500	14.66	13.42	28.08	46.00	-17.92	peak			
5		447.1000	6.82	21.49	28.31	46.00	-17.69	peak			
6		877.1333	6.30	30.25	36.55	46.00	-9.45	peak			

### RADIATED EMISSION ABOVE 1GHZ

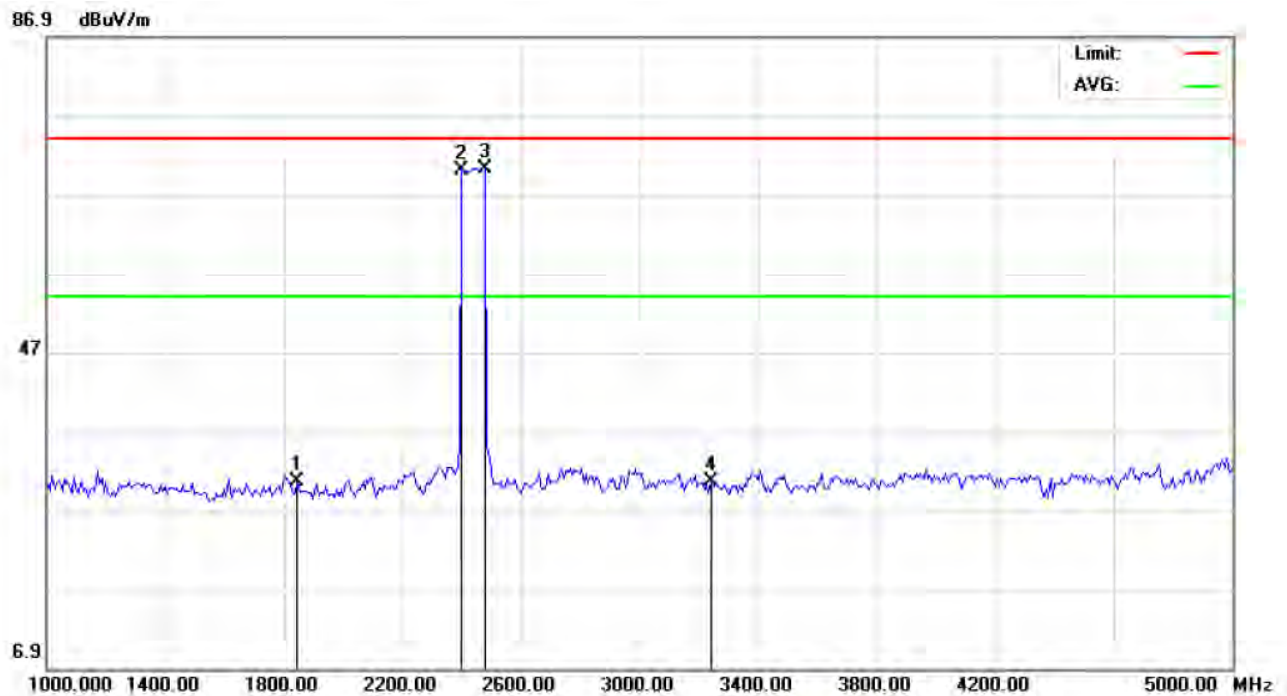

Site: site #1 Polarization: **Horizontal** Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
EUT: GSM Mobile Phone Distance: 3m  
M/N: I9300  
Mode: Normal Hopping  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1846.667	32.27	-1.73	30.54	74.00	-43.46	peak			
2		2402.000	69.65	0.32	69.97	74.00	-4.03	peak			
3	*	2480.000	69.76	0.41	70.17	74.00	-3.83	peak			
4		3240.000	28.74	1.87	30.61	74.00	-43.39	peak			

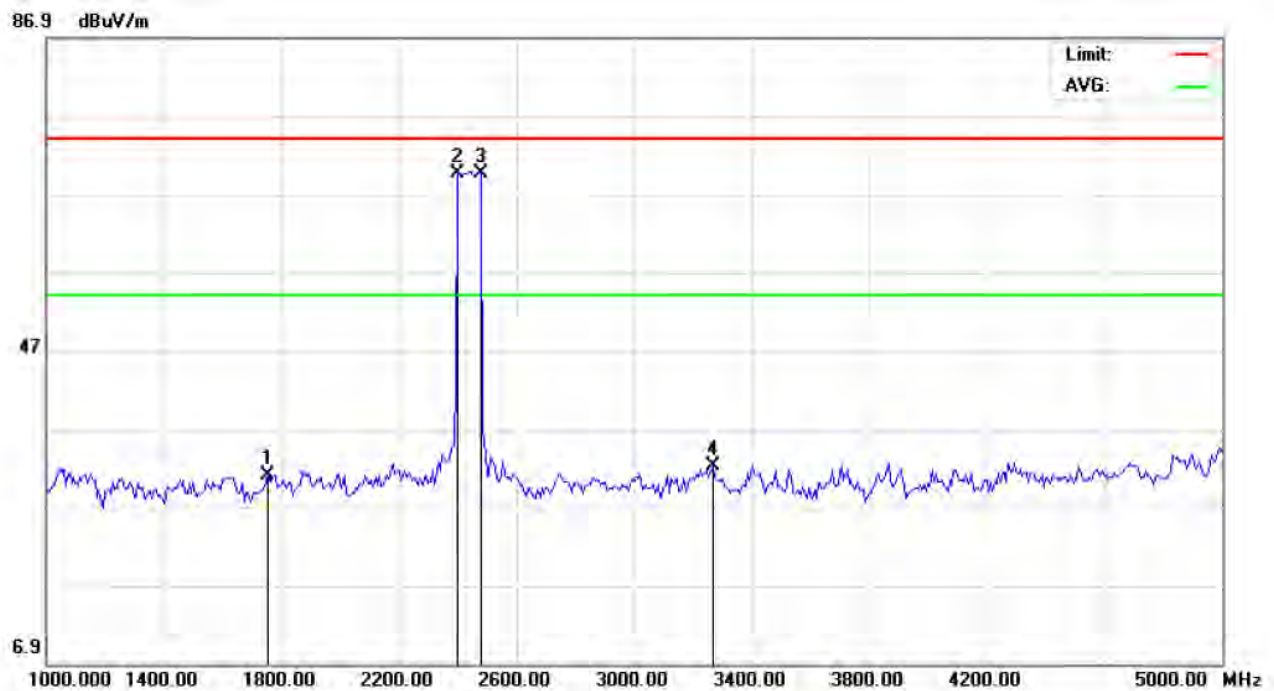

Site: site #1 Polarization: **Vertical** Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
EUT: GSM Mobile Phone Distance: 3m  
M/N: I9300  
Mode: Normal Hopping  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1753.333	33.81	-2.71	31.10	74.00	-42.90	peak			
2	*	2402.000	69.37	0.32	69.69	74.00	-4.31	peak			
3		2480.000	69.21	0.41	69.62	74.00	-4.38	peak			
4		3266.667	30.22	1.89	32.11	74.00	-41.89	peak			

**Note:** 5~25GHz at least have 20dB margin. No recording in the test report.  
Factor=Antenna Factor+ Cable loss-Amplifier gain, Over=Measurement-Limit.



## 9. BAND EDGES EMISSION

### 9.1 MEASUREMENT PROCEDURE


1. Set the EUT Work on the top, the bottom operation frequency individually.
2. Set SPA Start or Stop Frequency = Operation Frequency, RBW $\geq$ 1%span, VBW $\geq$ RBW
3. The band edges was measured and recorded.

### 9.2 TEST SET-UP

The same as described in section 8.2

### 9.3 TEST RESULT

TEST PLOT OF BAND EDGE FOR LOW CHANNEL

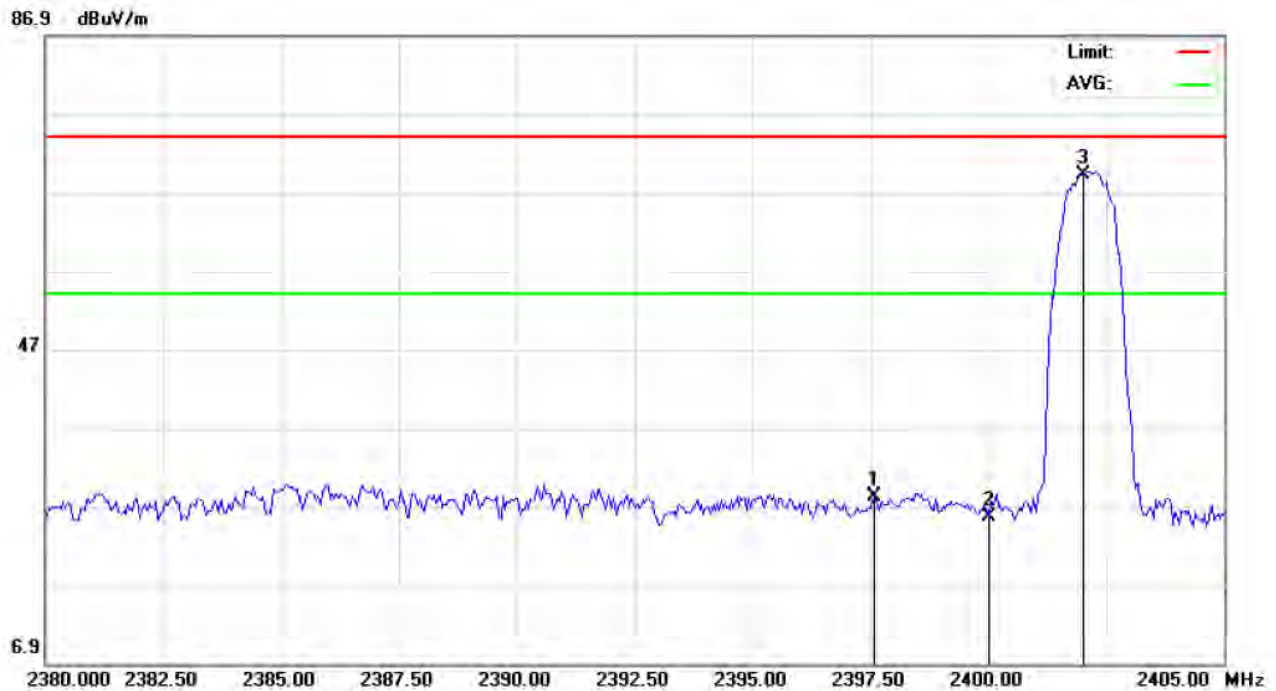

Site: site #1

Polarization: **Horizontal**

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

Power:

Humidity: 60 %

EUT: GSM Mobile Phone


Distance: 3m

M/N: I9300

Mode: Low Channel-TX(3Mbps)

Note:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2397.583	27.81	0.32	28.13	74.00	-45.87	peak			
2		2400.000	25.37	0.32	25.69	74.00	-48.31	peak			
3	*	2402.000	68.89	0.32	69.21	74.00	-4.79	peak			

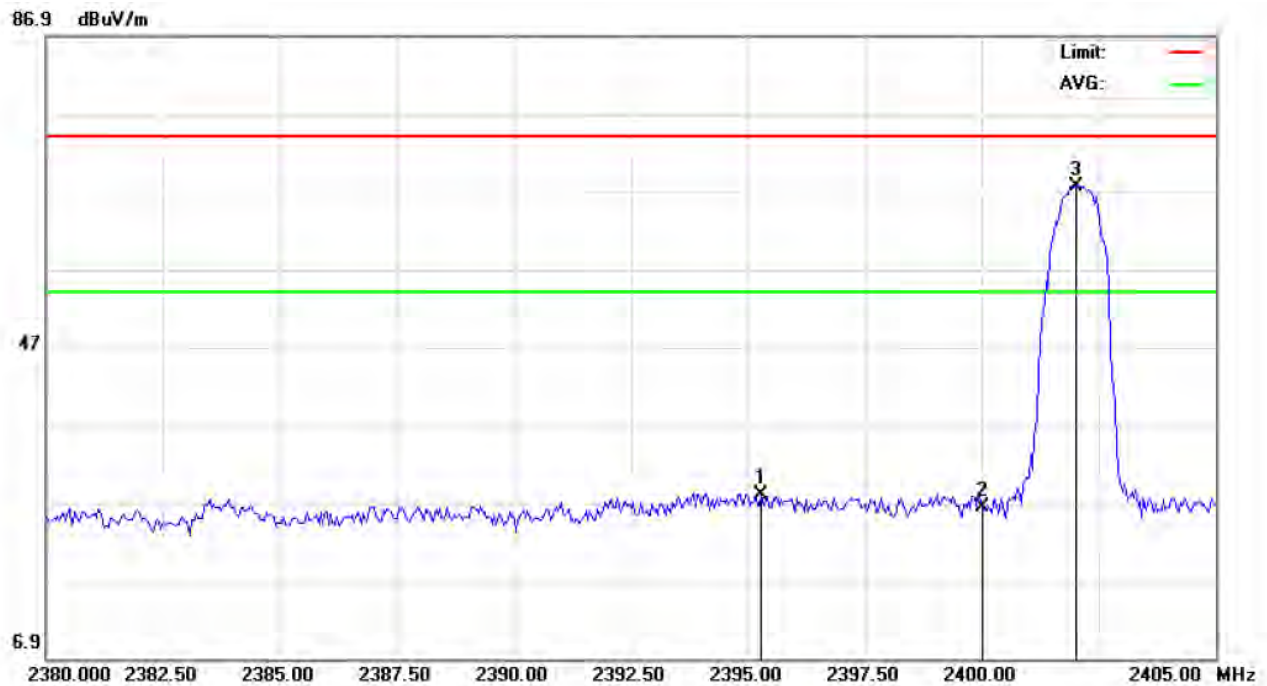

Site: site #1 Polarization: **Vertical** Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
EUT: GSM Mobile Phone Distance: 3m  
M/N: I9300  
Mode: Low Channel-TX (3Mbps)  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2395.292	27.70	0.31	28.01	74.00	-45.99	peak			
2		2400.000	26.15	0.32	26.47	74.00	-47.53	peak			
3	*	2402.000	67.21	0.32	67.53	74.00	-6.47	peak			


### TEST PLOT OF BAND EDGE FOR HIGH CHANNEL

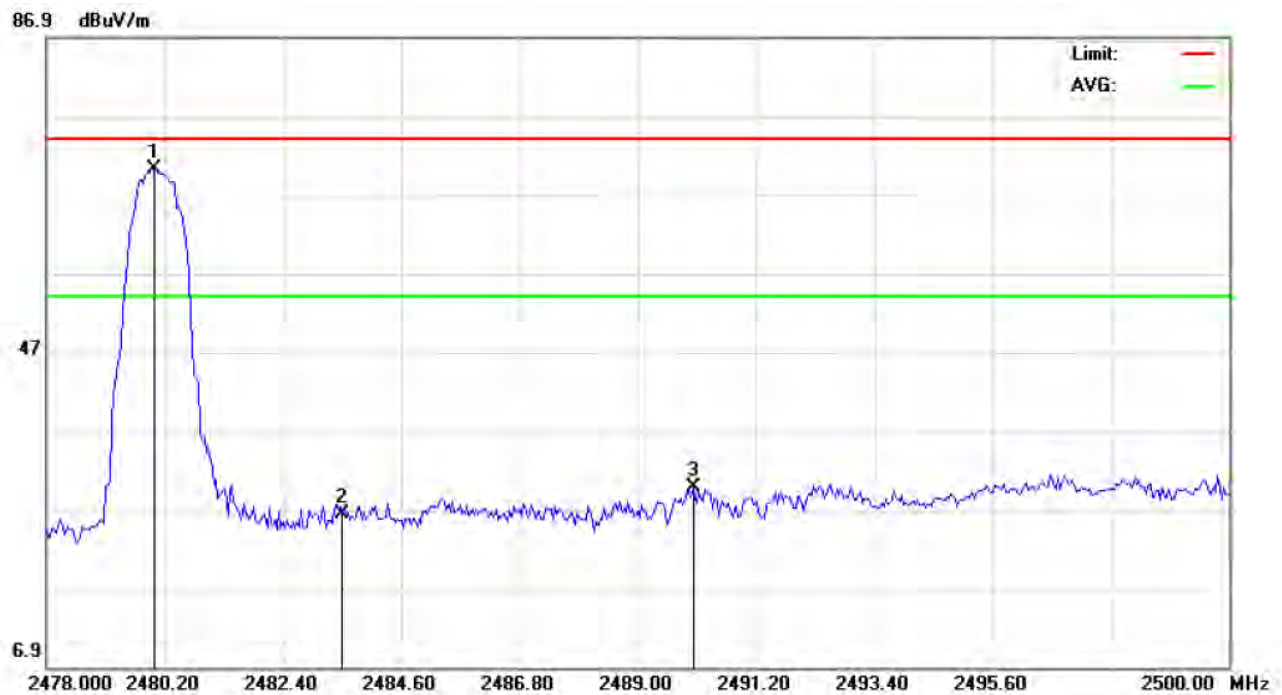

Site: site #1 Polarization: **Horizontal** Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
EUT: GSM Mobile Phone Distance: 3m  
M/N: I9300  
Mode: High Channel-TX (3Mbps)  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	69.70	0.41	70.11	74.00	-3.89	peak			
2		2483.500	25.95	0.41	26.36	74.00	-47.64	peak			
3		2490.027	29.33	0.42	29.75	74.00	-44.25	peak			



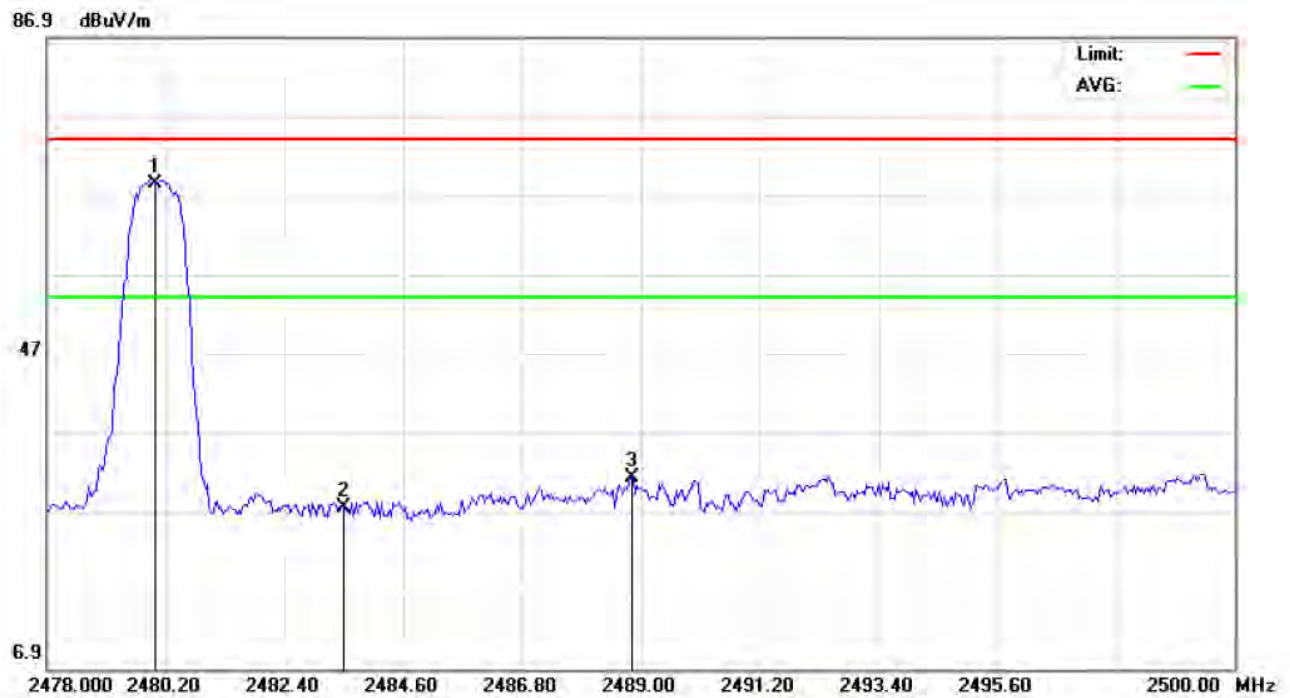

Site: site #1	Polarization: <i>Vertical</i>	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)	Power:	Humidity: 60 %
EUT: GSM Mobile Phone	Distance: 3m	
M/N: I9300		
Mode: High Channel-TX (3Mbps)		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	67.90	0.41	68.31	74.00	-5.69	peak			
2		2483.500	27.09	0.41	27.50	74.00	-46.50	peak			
3		2488.853	30.87	0.42	31.29	74.00	-42.71	peak			

## 10. NUMBER OF HOPPING FREQUENCY

### 10.1 MEASUREMENT PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer Start = 2.4GHz Stop = 2.4835GHz
4. Set the Spectrum Analyzer as RBW $\geq$ 1%span, VBW $\geq$ RBW.

### 10.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 6.2  
Conducted Method.


### 10.3 MEASUREMENT EQUIPMENT USED

The same as described in section 6.3

### 10.4 LIMITS AND MEASUREMENT RESULT

TOTAL NO. OF HOPPING CHANNEL	LIMIT (NO. OF CH)	MEASUREMENT (NO. OF CH)	RESULT
	$\geq 15$	79	PASS

TEST PLOT FOR NO. OF TOTAL CHANNELS

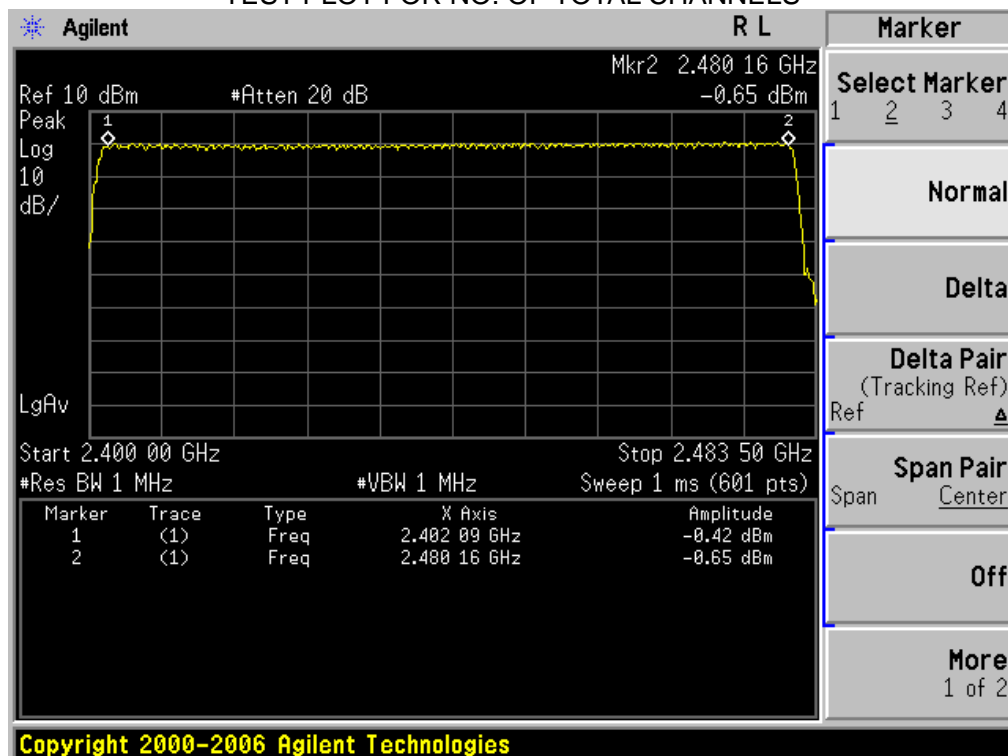

## 11. TIME OF OCCUPANCY (DWELL TIME)

### 11.1 MEASUREMENT PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
3. Set Span = zero span, centered on a hopping channel.
4. Set the spectrum analyzer as RBW=1MHz, VBW>=RBW, Span = 0 Hz.

### 11.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 6.2

Conducted Method

### 11.3 MEASUREMENT EQUIPMENT USED

The same as described in section 6.3


### 11.4 LIMITS AND MEASUREMENT RESULT

Channel	Spectrum Reading 3Mbps (ms)DH5	Period Time (s)	Sweep Time (ms)	Limit (ms)
Low	2.851	31.6	304.11	400
Middle	2.83	31.6	301.87	400
High	2.851	31.6	304.11	400


A Period Time =  $79 \times 0.4 = 31.6$  s

Sweep Time =  $\text{Reading} \times (1600/6) / 79 \times 31.6$


TEST PLOT OF LOW CHANNEL

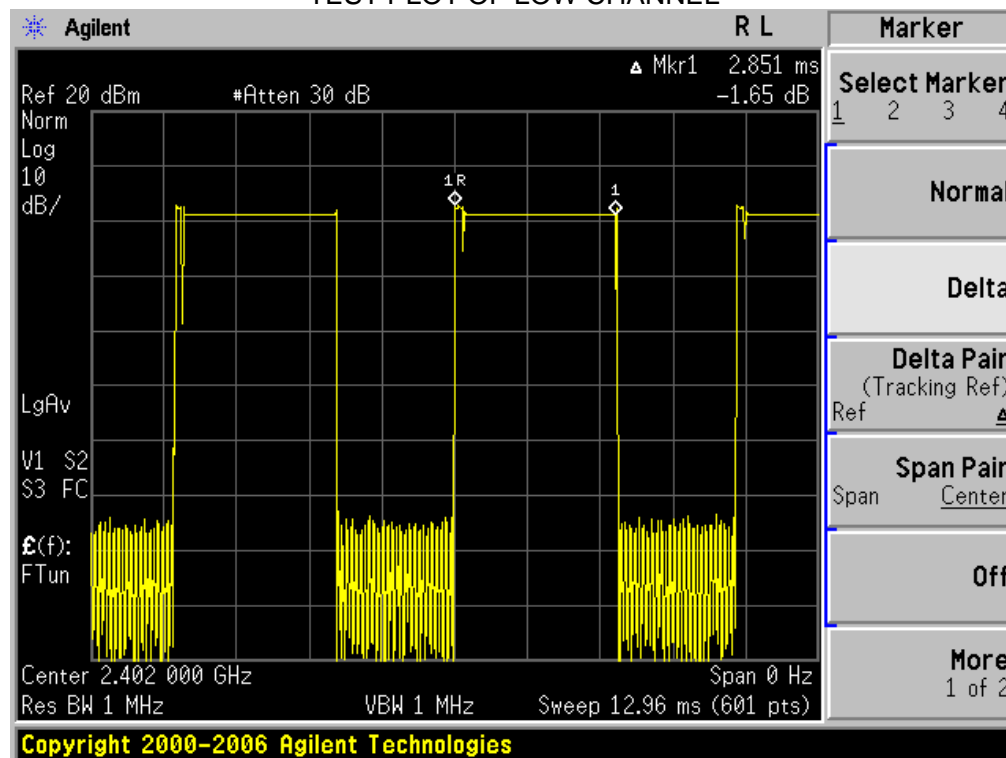

### TEST PLOT OF MIDDLE CHANNEL

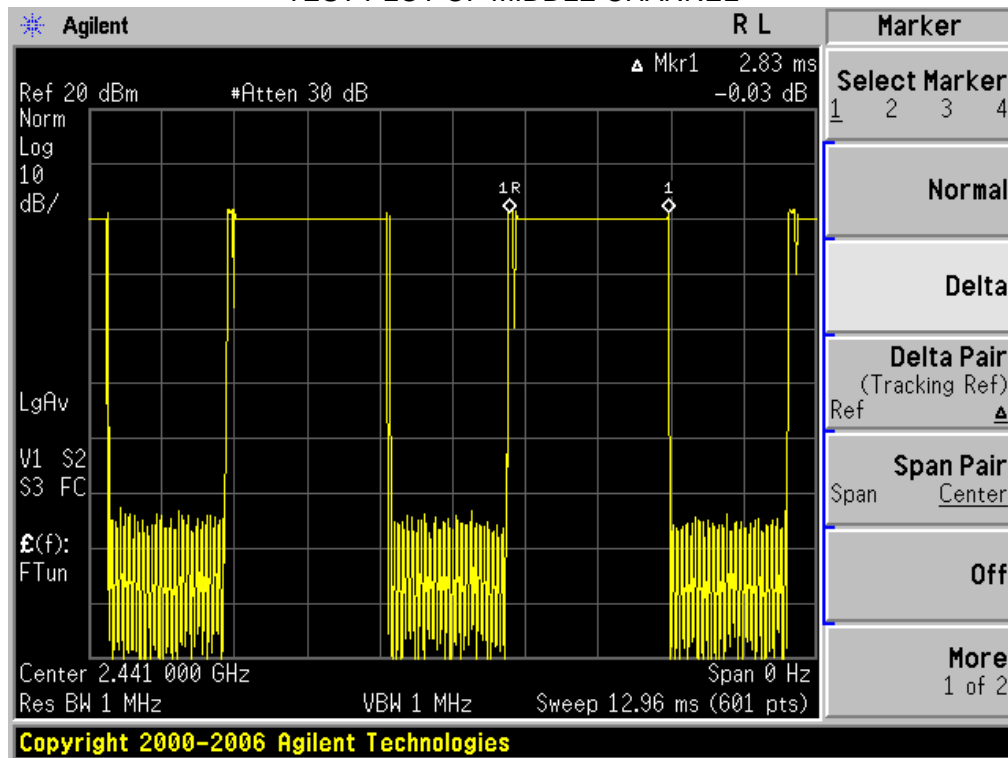

### TEST PLOT OF HIGH CHANNEL

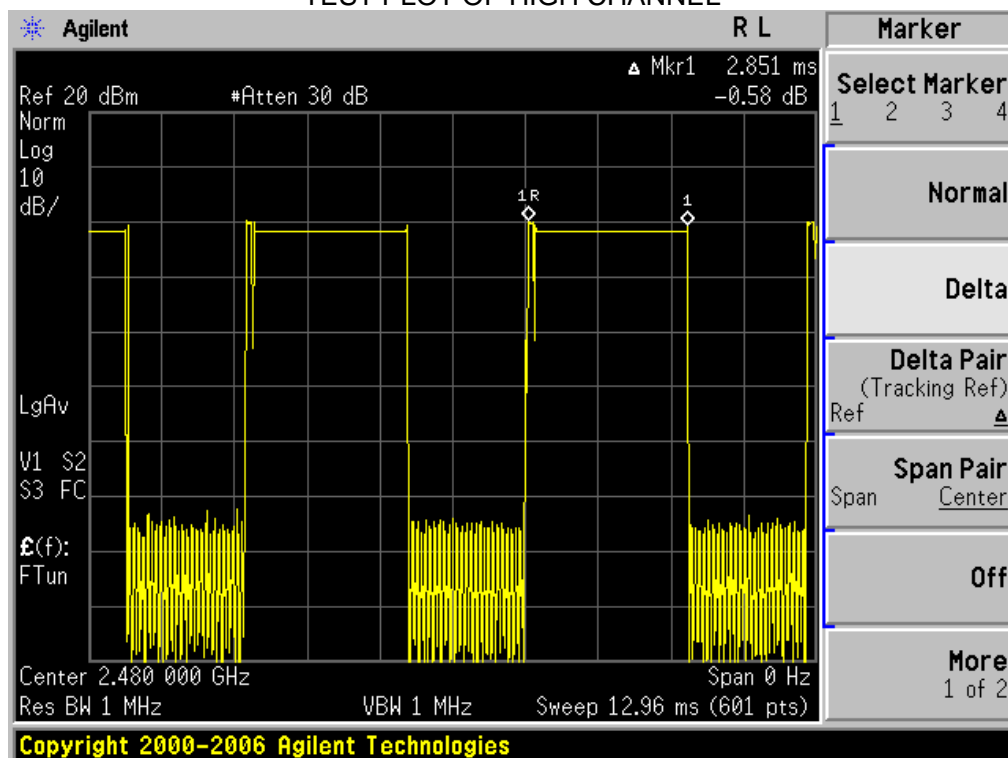

**Note:** Only the worst test data was recorded in the report.

## 12. FREQUENCY SEPARATION

### 12.1 MEASUREMENT PROCEDURE

1. Place the EUT on the table and set it in transmitting mode
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
3. Set Span = wide enough to capture the peaks of two adjacent channels Resolution (or IF) Bandwidth (RBW)  $\geq 1\%$  of the span Video (or Average) Bandwidth (VBW)  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold

### 12.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 6.2

### 12.3 MEASUREMENT EQUIPMENT USED


The same as described in section 6.3

### 12.4 LIMITS AND MEASUREMENT RESULT

FREQUENCY SEPARATION TEST RESULT

CHANNEL	CHANNEL SEPARATION	LIMIT	RESULT
	KHz	KHz	
CH00-CH01	1000	$\geq 25$ KHz or 2/3 20 dB BW	Pass

TEST PLOT FOR FREQUENCY SEPARATION (3Mbps)

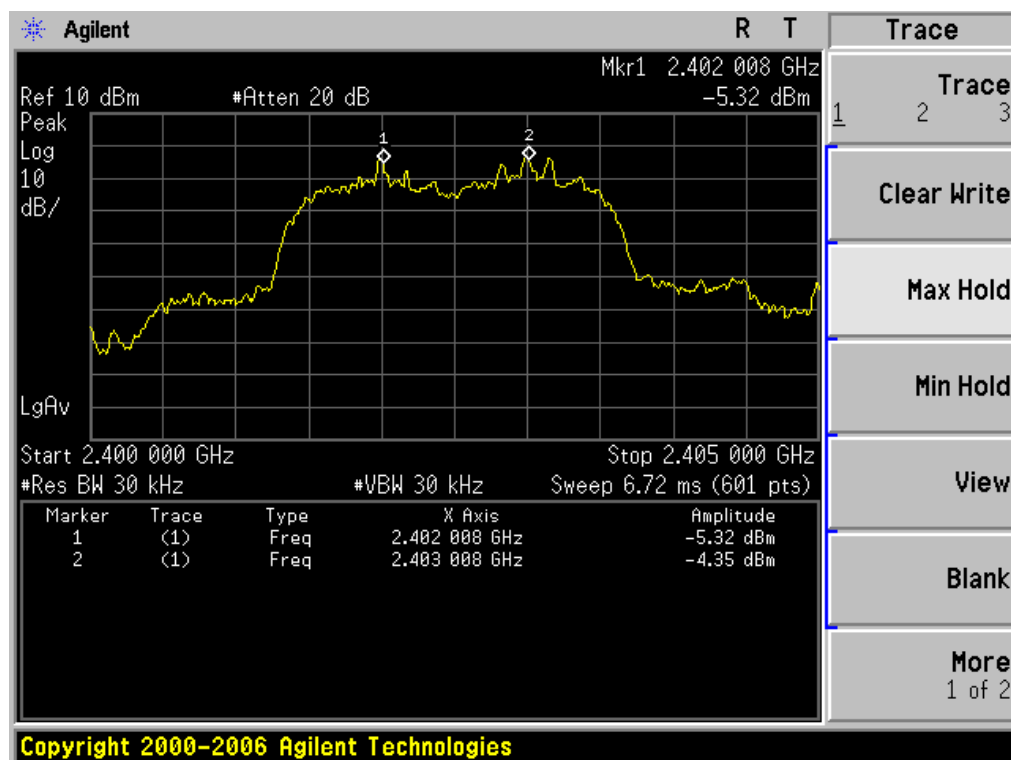


### 13. CONDUCTED EMISSION

#### 13.1 LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.( dBuV)	Average( dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

**\*\*Note:** 1. The lower limit shall apply at the transition frequency.  
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

#### 13.2 BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

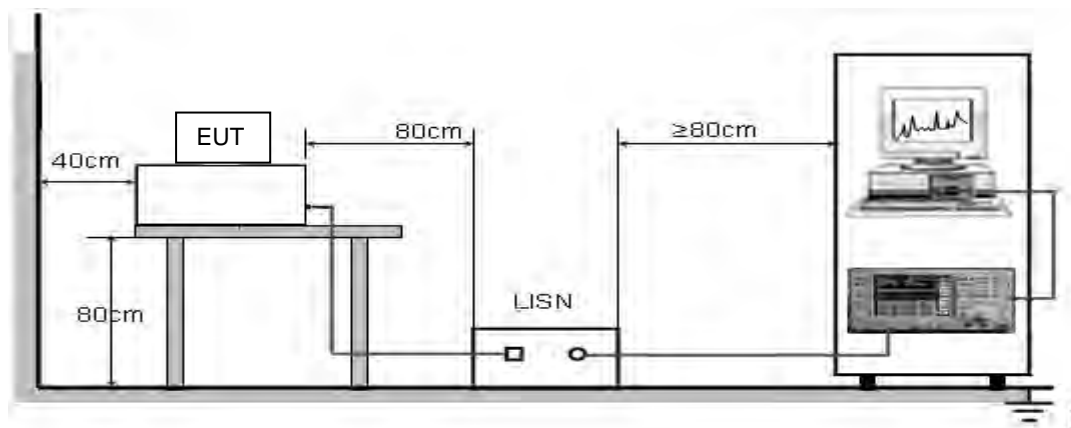


### 13.3 PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per ANSI C63.4.
- 3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4) The EUT received DC 5V charging power by adapter which received 120V/60Hz power through a LISN.
- 5) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 6) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 7) During the above scans, the emissions were maximized by cable manipulation.
- 8) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions.
- 9) Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.

The test data of the worst case condition(s) was reported on the Summary Data page.

### 13.4 TEST RESULT OF LINE CONDUCTED EMISSION TEST

#### LINE CONDUCTED EMISSION – L

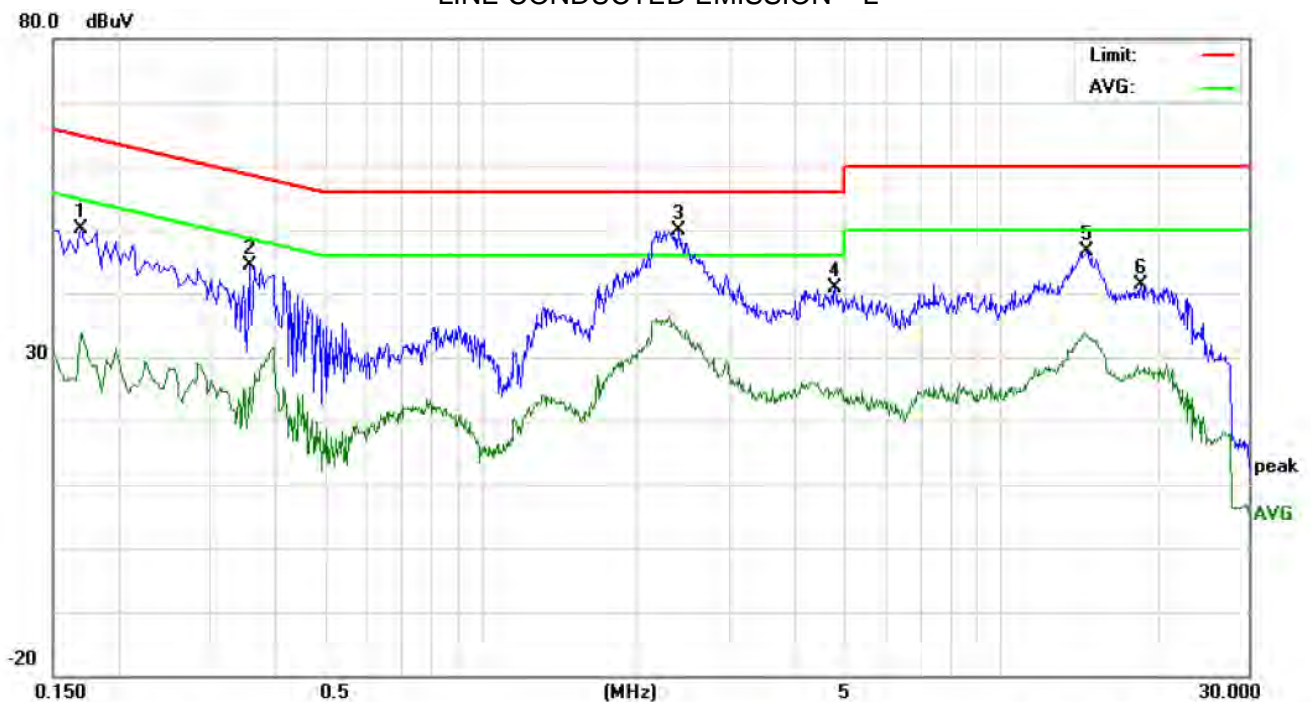


Site: Conduction Phase: **L1** Temperature: 26  
Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 60 %  
EUT: GSM Mobile phone  
M/N: I9300  
Mode: Normal Hopping  
Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1700	39.90		23.74	10.18	50.08		33.92	64.96	54.96	-14.88	-21.04	P	
2	0.3580	34.11		14.96	10.31	44.42		25.27	58.77	48.77	-14.35	-23.50	P	
3	2.4020	39.47		23.75	10.39	49.86		34.14	56.00	46.00	-6.14	-11.86	P	
4	4.8220	30.57		14.26	10.23	40.80		24.49	56.00	46.00	-15.20	-21.51	P	
5	14.6780	36.41		23.34	10.12	46.53		33.46	60.00	50.00	-13.47	-16.54	P	
6	18.7139	31.14		17.49	10.12	41.26		27.61	60.00	50.00	-18.74	-22.39	P	



# LINE CONDUCTED EMISSION – N

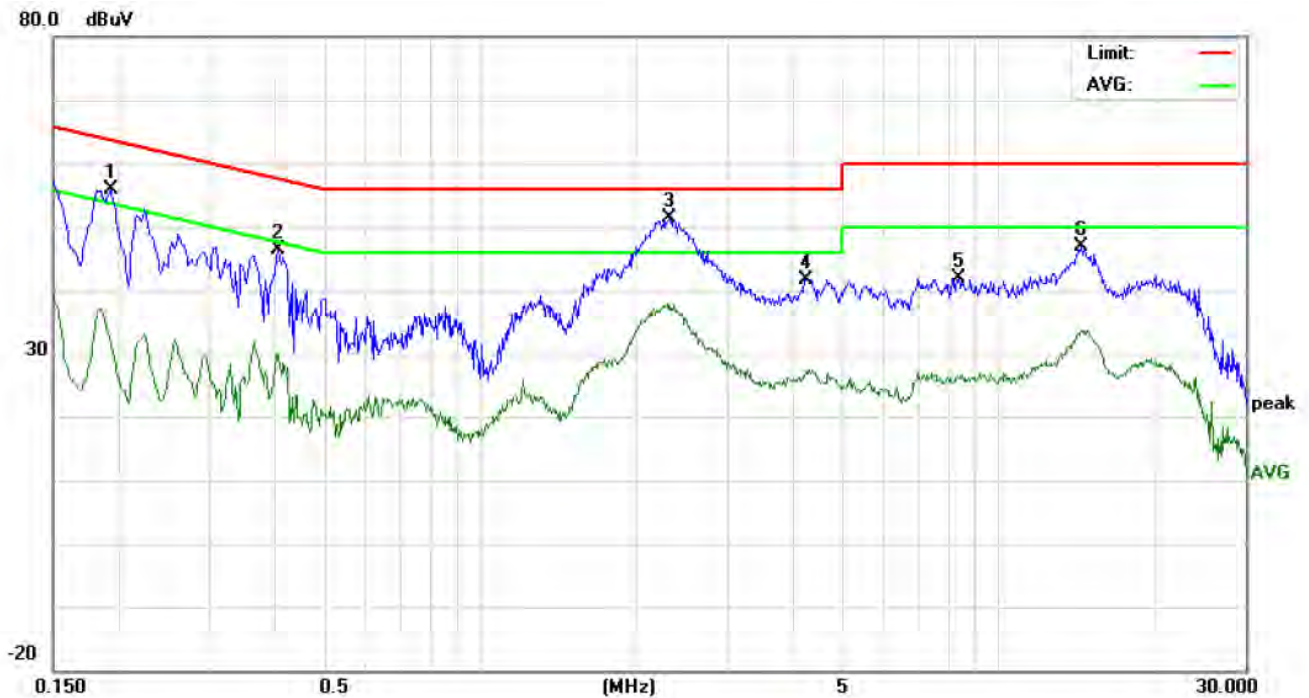

Site: Conduction Phase: **N** Temperature: 26  
Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 60 %  
EUT: GSM Mobile phone  
M/N: I9300  
Mode: Normal Hopping  
Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1940	45.72		21.54	10.21	55.93		31.75	63.86	53.86	-7.93	-22.11	P	
2	0.4100	35.98		18.72	10.34	46.32		29.06	57.65	47.65	-11.33	-18.59	P	
3	2.3260	40.97		27.31	10.36	51.33		37.67	56.00	46.00	-4.67	-8.33	P	
4	4.2540	31.43		16.69	10.32	41.75		27.01	56.00	46.00	-14.25	-18.99	P	
5	8.3740	31.58		15.82	10.34	41.92		26.16	60.00	50.00	-18.08	-23.84	P	
6	14.4780	36.81		23.54	10.12	46.93		33.66	60.00	50.00	-13.07	-16.34	P	

## APPENDIX I PHOTOGRAPHS OF THE EUT

TOTAL VIEW OF EUT



TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT





BACK VIEW OF EUT



LEFT VIEW OF EUT



RIGHT VIEW OF EUT



OPEN VIEW OF EUT-1



OPEN VIEW OF EUT-2




OPEN VIEW OF EUT-3







INTERNAL VIEW OF EUT-1

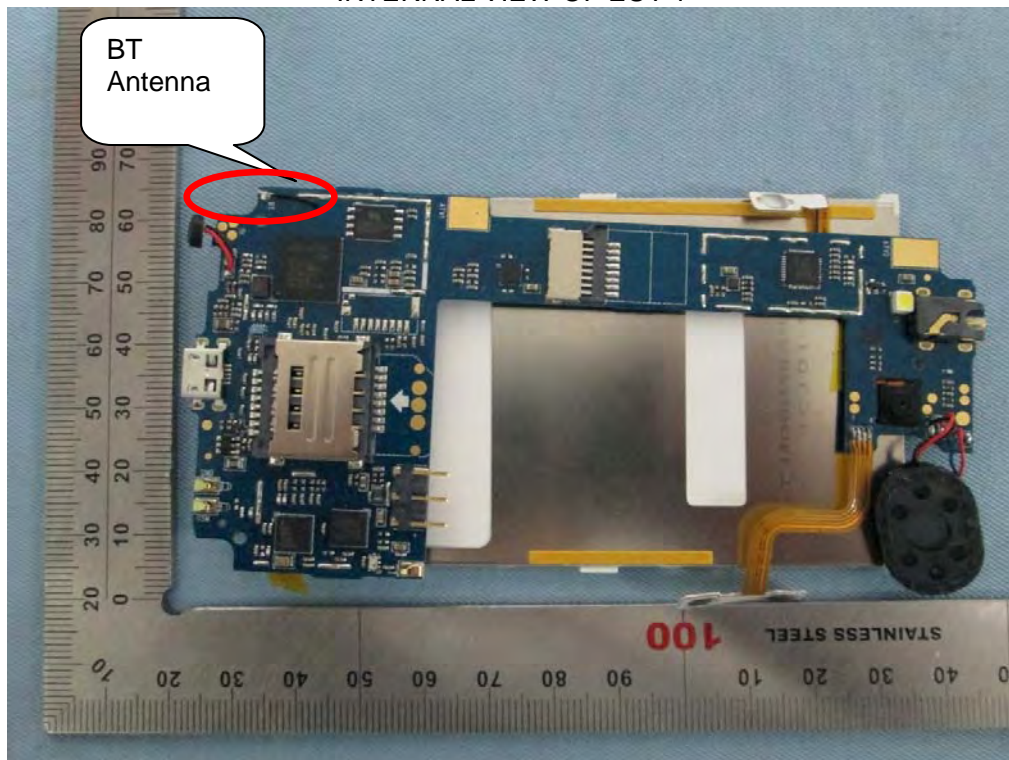

INTERNAL VIEW OF EUT-2

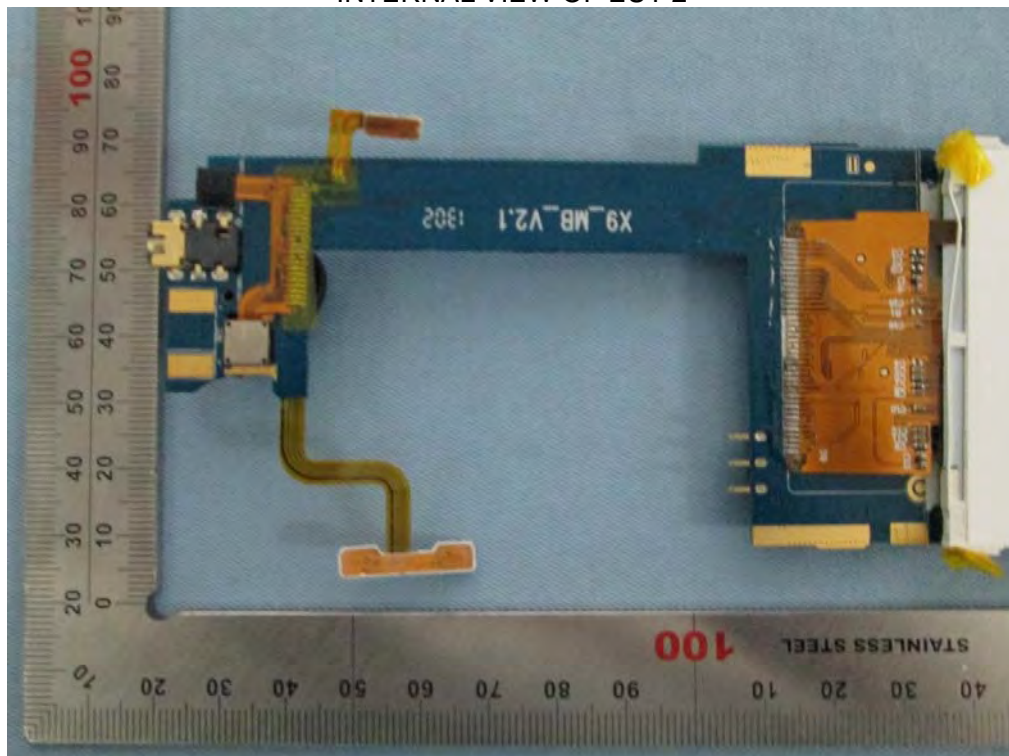

INTERNAL VIEW OF EUT-3

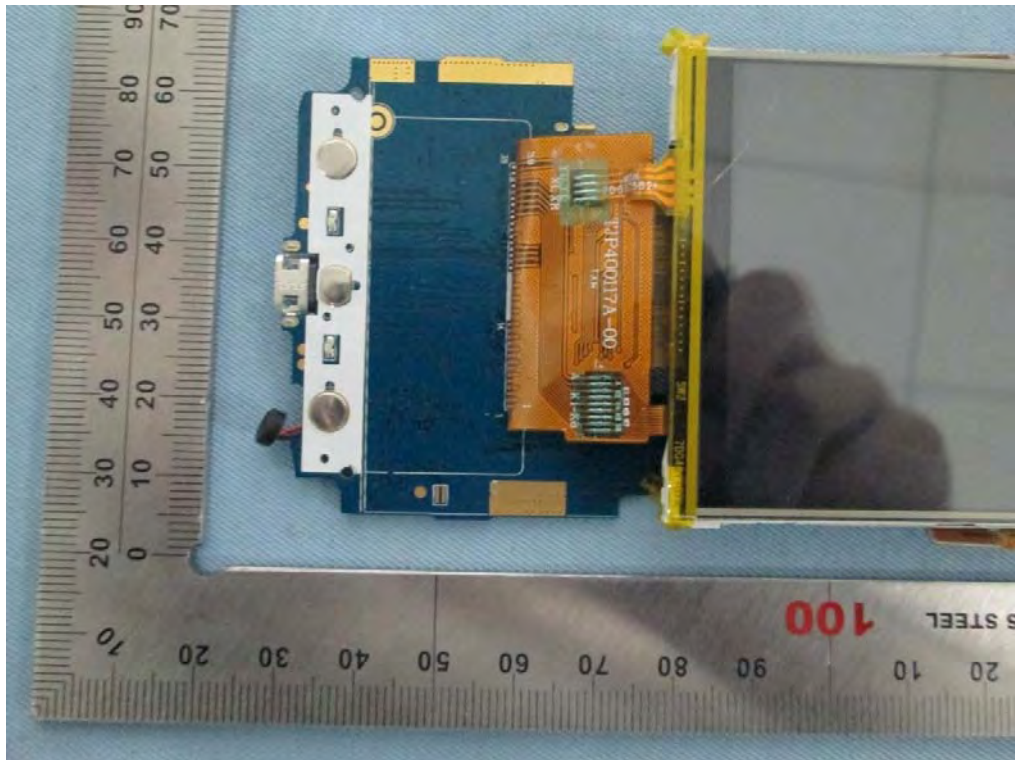




**APPENDIX II**  
**PHOTOGRAPHS OF THE TEST SETUP**  
FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP

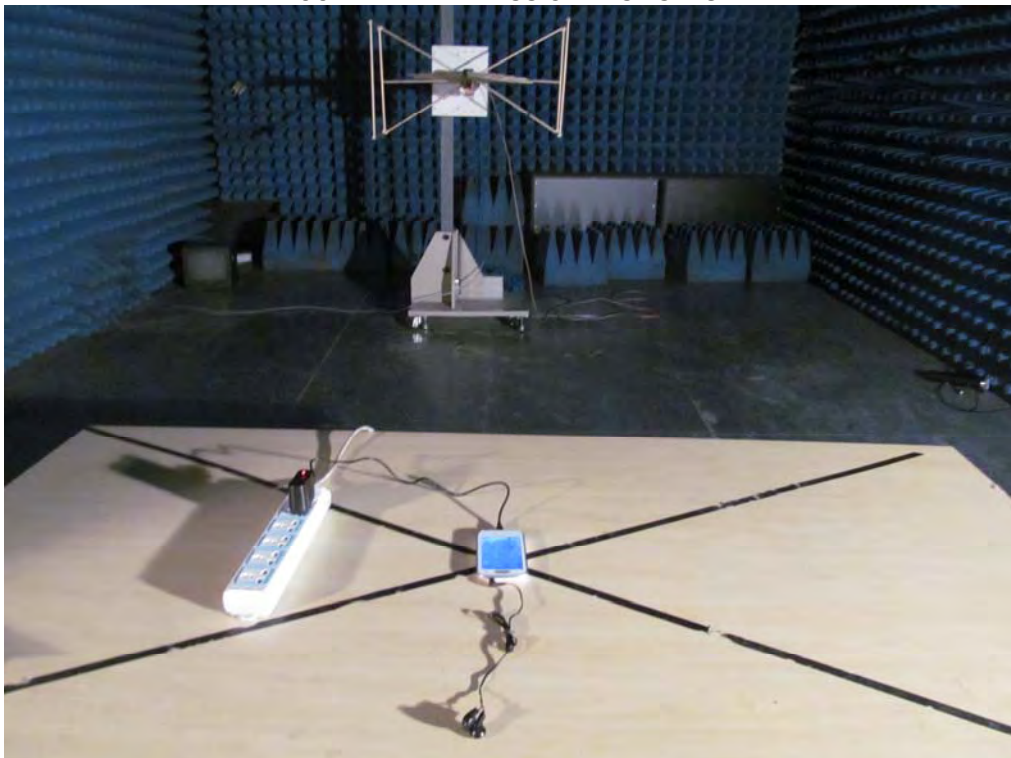

----END OF REPORT----