

# Certification of Compliance

## CFR 47 Part 15 Subpart B

**Test Report File No.** : 04-IST-0160      **Date of Issue** : April 11, 2004  
**Model** : LS3200  
**Kind of Product** : LCD Monitor  
**Applicant** : Orion Technology Co., Ltd.  
**Address** : 1242, In-Ri, Apo-Eup, Gimcheon-Si, Kyungbuk, 740-862,  
Korea  
**Manufacturer** : Orion Technology Co., Ltd.  
**Address** : 1242, In-Ri, Apo-Eup, Gimcheon-Si, Kyungbuk, 740-862,  
Korea

### Test Result

Positive

Negative

Reviewed By



S. J. Cho / EMC Group Manager

Approved By



Joon H. Lee / Chief

### Comment (s)

- Investigations requested : Measurement to the relevant clauses of FCC rules and regulations Part 15 Subpart B - Unintentional Radiators, Class B.
- The test report with appendix consists of 16 pages.
- The test result only responds to the tested sample.
- It is not allowed to copy this report even partly without the allowance of IST EMC Laboratory.
- This equipment as for has been shown to be capable of continued compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4 2003.



## TABLE OF CONTENTS

<b>Table of contents</b>	2
<b>Information of test laboratory, Environmental conditions, Power used, Product information</b>	3
<b>Descriptions of test</b>	
Conducted Emission	4
Radiated Emission	5
<b>Equipment Under Test</b>	6
<b>Summary</b>	7
<b>■ Test Conditions and Data - Emissions</b>	
◆ Conducted Emissions	0.15MHz - 30MHz      Applicable
Test Conditions / Data and Plots	8-10
◆ Radiated Emissions	30MHz - 1GHz      Applicable
Test Conditions / Data and Plots	11-12
Appendix	
A. The Photos of Test Setup	13-14
B. The Photos of Equipment Under Test	15-16

Note:

## INFORMATIONS OF TEST LABORATORY

EMC LABORATORY of IST Co., Ltd. (*FCC Filing Lab.*)  
San 21-8, Goan-Ri, Baekam-Myun, Yongin-City  
Kyonggi-Do, 449-860, Korea  
TEL : +82 31 333 4093                      FAX : +82 31 333 4094

## ENVIRONMENTAL CONDITIONS

Temperature                                      17.2 °C  
Humidity    48 %  
Atmospheric pressure                          1012 mbar

## POWER SUPPLY SYSTEM USED

Power supply system                            AC 120Vac, 60Hz  
(Refer to the product information)

## PRODUCT INFORMATION

LCD Type :                                        Panel Model - LC320W01(A4) (LG.PHILIPS LCD)  
    32-inch diagonal AM-TFT (Active Matrix)  
    Pixel pitch - 0.51(H) x 0.51(V) mm  
    Contrast ratio - 1000:1 (Typical)  
    Brightness - 500cd/m<sup>2</sup> (Typical)  
    Response Time: Tr-10msec, Tf-8msec (Typical)

Resolution :                                        1366 x 768, 60Hz (max.)

Synchronization :                                Horizontal - 44~53 KHz, Vertical - 44~66 KHz

Input Signal :                                     Sync - separate TTL Level  
    Video - Analog 0.7 Vp-p / 75 ohm  
    S-Video, AV (Composite, Sound L/R)  
    PC Stereo Sound

Power Source :                                    100~240Vac, 50/60Hz (auto switching)

Dimensions(W x H x D) :                        784 x 518 x 182 mm

Weight-net / gross :                             22.6 kg / 24.6 kg

- EMC suppression device is not used during the test.
- Please refer to user's manual.


## DESCRIPTIONS OF TEST

### Conducted Emissions:

The measurement were performed over the frequency range of 0.15MHz to 30MHz using a 50Ω/50uH LISN as the input transducer to a Spectrum Analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 10KHz or for "quasi-peak" & "Average" within a bandwidth of 9KHz.

#### -Procedure of Test

The line-conducted facility is located inside a shielded room No.1. A 1m X 1.5m wooden table 80cm height is placed 40cm away from the vertical wall and 1.5m away from the other wall of the shielded room. The R/S ESH3-Z5 and EMCO 3825/2 LISN are bonded to bottom of the shielded room. The EUT is located on the wooden table with distance more than 80cm from the LISN and powered from the EMCO LISN .The peripheral equipment is powered from the other LISN. Power to the LISNs are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner  $\phi$  1.2cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the EMCO LISN. All interconnecting cables more than 1m were shortened by non-inductive bundling to a 1m length. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating conditions. The RF output of the LISN was connected to the R/S receiver to determine the frequency producing the maximum emission from the EUT. The frequency producing the maximum level was reexamined using Quasi-Peak mode by manual measurement, after scanned by automatic Peak mode for frequency range from 0.15 to 30MHz. The bandwidth of the receiver was set to 10kHz. The EUT, peripheral equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

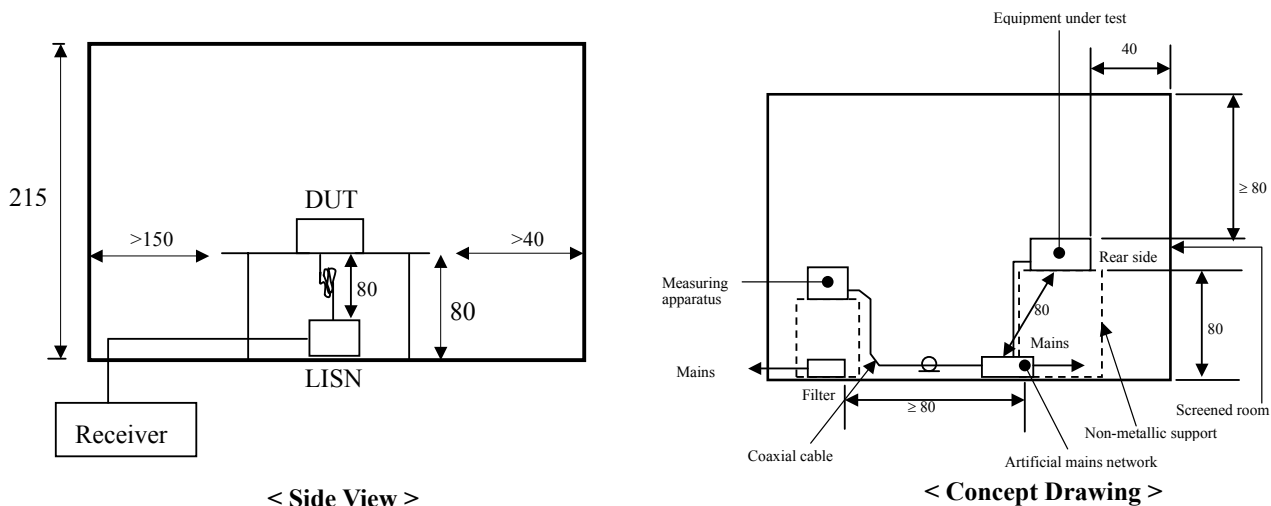


## DESCRIPTION OF TEST

### Radiated Emissions:

The measurement was performed over the frequency range of 30MHz to 1GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurement was made with the detector set for "quasi-peak" within a bandwidth of 120KHz.

#### -Procedure of Test

Preliminary measurements were made at 3 meter using bi-conical and log-periodic antennas, and spectrum analyzer to determine the frequency producing the max. emission in anechoic chamber. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turn-table azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30MHz to 300MHz using S/B bi-conical antenna and 300 to 1000MHz using S/B log-periodic antenna. Above 1GHz, linearly polarized double ridge horn antennas were used. Final measurements were made at open site with 3-meters test distance using S/B bi-log antenna or horn antenna. The OATS have been verified in regular for its normalized site attenuation. The test equipment was placed on a wooden table. Sufficient time for the EUT, peripheral equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 120kHz or 1MHz depending on the frequency of type of signal. The EUT, peripheral equipment and interconnecting cables were re-configured to the set-up producing the max. emission for the frequency and were placed on top of a 0.8-meter high nonmetallic 1 x 1.5 meter table. The EUT, peripheral equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation to the EUT and/or peripheral equipment and changing the polarity of the antenna, whichever determined the worst-case emission.

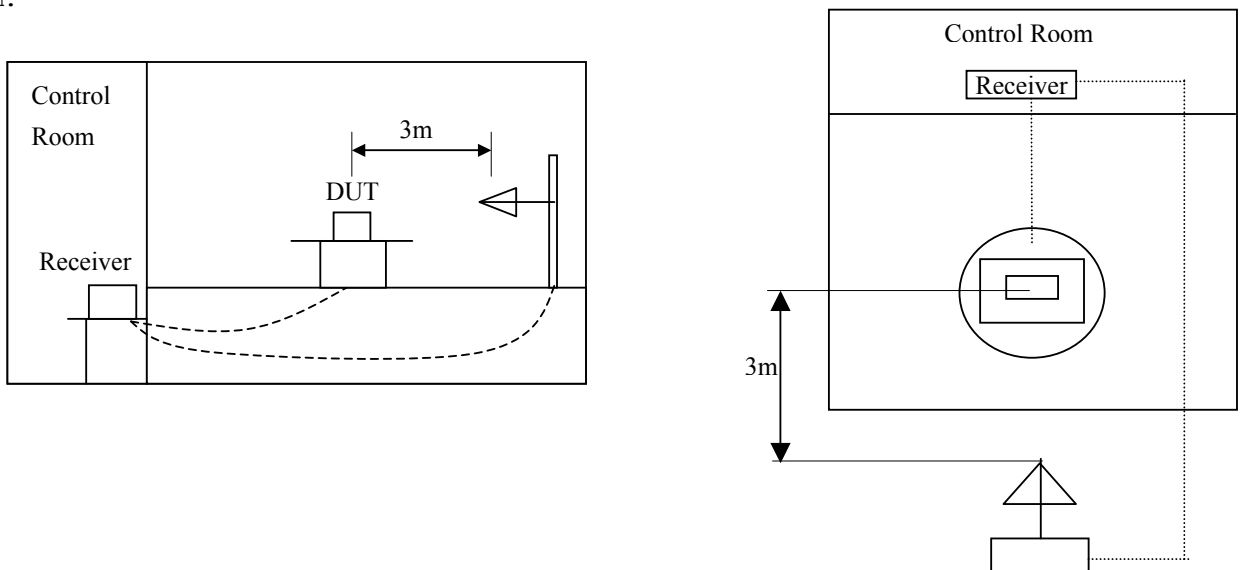

## Equipment Under Test

**EUT Type :**

- Table-Top.                       Floor-Standing.  
 Table-Top and Floor-Standing(Combination).

**Operation - mode of the E.U.T. :**

The equipment under test was operated during the measurement under following conditions :

- Standby Mode  
 Operational Condition :     640x480, 60Hz  
     800x600, 60Hz  
     1024x768, 60Hz  
     1280x768, 60Hz  
     1360x768, 60Hz

The test results of followings are the representative of worst case emissions for the available resolution can be adjusted.

**Configuration of the equipment under test :**

Following peripheral devices and interface cables were connected during the measurement :

Equipment	Type	Brand	Serial No.
PC	Vectra VL420MT	HP	SG23101784
Keyboard	SK-2502C	HP	M020321066
PS/2 Mouse	M-S48a	HP	LZC20602926
Serial Mouse	M-M28	Logitech	811308-00
VCR	DV-T8DN	DAEWOO	N/A

**Connecting Interface Cables :**

- Unshielded AC power cable : 1.7 m
- Shielded monitor's signal cable (with two ferrite core) : 1.5 m
- Unshielded PC Stereo In cable : 1.5 m
- Unshielded PC Stereo Out (terminated at 300 ohm)
- Unshielded BNC cable (terminated at 75 ohm) : 1.0 m
- Unshielded S-Video (terminated at 75 ohm)
- Unshielded Audio In cable (terminated at VCR) : 1.2 m
- Unshielded Audio Out cable (terminated at VCR) : 1.2 m

Note :

## SUMMARY

### Emissions

#### ■ Conducted Emission

The requirements are  MET  Not MET  
Minimum limit margin 10.7 dB at 1.238 MHz  
Maximum limit exceeding

**Remarks : Limits are kept with more 3dB margin.**

Find the test data in following pages 9 to 10.

#### ■ Radiated Emission

The requirements are  MET  Not MET  
Minimum limit margin 3.2 dB at 340.8 MHz  
Maximum limit exceeding

**Remarks : Limits are kept with more 3dB margin.**

Test Mode at 1360x768, 60Hz.

Find the test data in following page 12.

### test Date

Begin of testing : April 06, 2005.

End of testing : April 09, 2005.

Note :

- means the test is applicable,
- is not applicable.

Prepared By



S.J.Oh / Research Engineer

## TEST CONDITIONS AND DATA

### Conducted Emissions

[Applicable]

◆ Test Equipment Used

Model Name	Description	Manufacture	Calibration Date	Serial Number
ESH 3	Test Receiver	Rohde & Schwarz	Jul. 15, 2004	861742/018
3725/2	LISN	EMCO	Jul. 15, 2004	9101-2068
KNW-407	LISN	Hyup-Rip	Jul. 15, 2004	8-883-10
ESH 3-Z2	Pulse Limiter	Rohde & Schwarz	Jul. 15, 2004	357.8810.52

◆ Test Accessories Used

Type	Manufacturer
Aneroid Barometer	Sato
Hygrometer	Sato

◆ Test Program           Scrolling "H" Characters Mode


◆ Test Date               April 07, 2004

◆ Test Area               Shielded room No.1

Note :                    *The equipment used is calibrated in regular for every year.*




Conducted Emissions

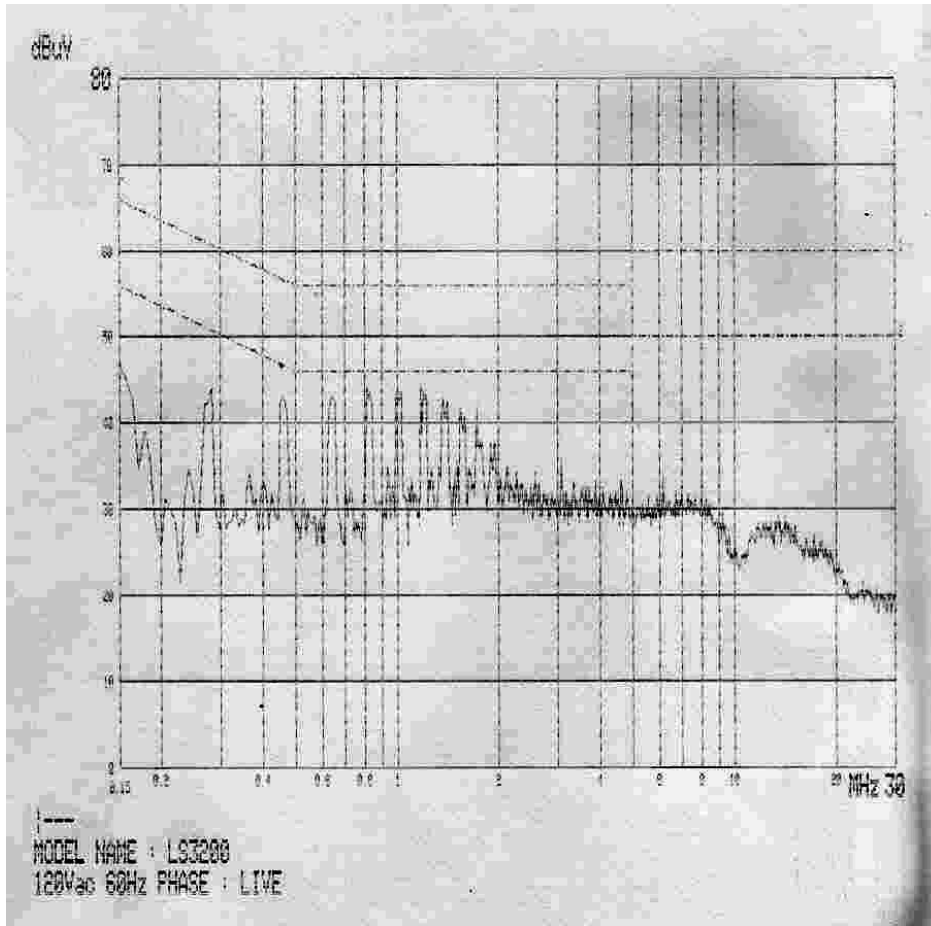

Freq. [MHz]	Measurement [dB µV]		Limit [dB µV]		Insertion Loss [dB]	Cable Loss [dB µV]	Result [dB µV]		Margin [dB]	
	Q-peak	Average	Q-peak	Average			Q-peak	Average	Q-peak	Average
0.153	41.7	21.6	65.8	55.8	0.2	0.5	42.4	22.3	23.4	33.5
0.290	43.5	34.2	60.5	50.5	0.2	0.5	44.1	34.8	16.4	15.7
0.860	44.8	25.6	56.0	46.0	0.1	0.5	45.3	26.1	10.7	19.9
1.238	44.7	25.6	56.0	46.0	0.1	0.4	45.3	26.2	10.7	19.8
6.617	27.3	13.8	60.0	50.0	0.1	0.5	28.0	14.5	32.0	35.5
14.123	23.4	16.1	60.0	50.0	0.2	0.7	24.2	16.9	35.8	33.1

Note :

Conducted Emissions

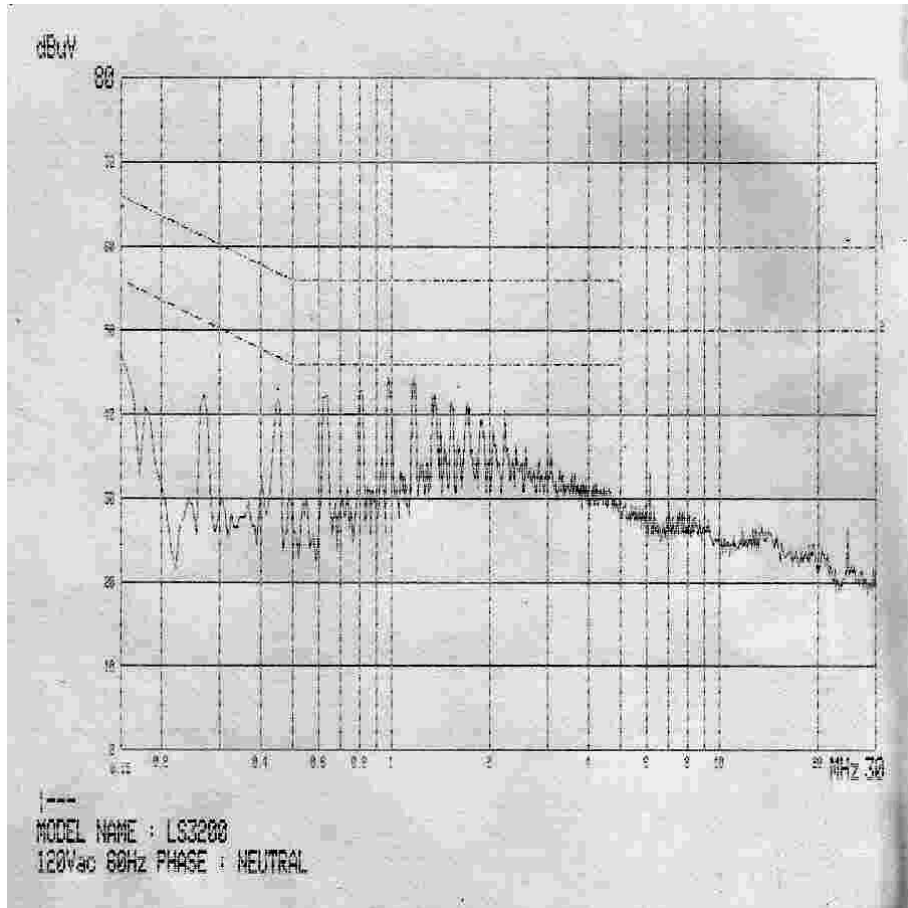

Freq. [MHz]	Measurement [dB µV]		Limit [dB µV]		Insertion Loss [dB]	Cable Loss [dB µV]	Result [dB µV]		Margin [dB]	
	Q-peak	Average	Q-peak	Average			Q-peak	Average	Q-peak	Average
0.162	43.4	21.7	65.4	55.4	0.1	0.5	44.0	22.3	21.4	33.1
0.270	42.3	33.8	61.1	51.1	0.1	0.5	42.9	34.4	18.2	16.7
0.990	42.8	23.8	56.0	46.0	0.1	0.4	43.3	24.3	12.7	21.7
1.169	43.5	30.6	56.0	46.0	0.1	0.4	44.1	31.2	11.9	14.8
6.144	32.6	30.0	56.0	46.0	0.1	0.6	33.3	30.7	26.7	19.3
24.577	26.7	24.5	56.0	46.0	0.3	0.7	27.7	25.5	32.3	24.5

Note :

## TEST CONDITIONS AND DATA

### Radiated Emission

[Applicable]

◆ Test Equipment Used

Name	Type	Manufacturer	Calibration. Date	Serial Number
ESVS10	Test Receiver	Rohde & Schwarz	Aug. 17, 2004	839049/004
VULB 9160	Antenna	Schwarzbeck	Jul. 19, 2004	3048

◆ Test Accessories Used

Type	Manufacturer
Aneroid Barometer	Sato
Hygrometer	Sato

◆ Test Program           Scrolling "H" characters Mode

◆ Test Date               April 08, 2004

◆ Test Area               Open site No.1

Note : The equipment used is calibrated in regular for every year.

**Radiated Emissions**


Mode	Freq. [MHz]	Reading [dBuV]	Antenna Factor [dB/m]	Cable Loss [dB]	Polar. [H/V]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]
640x480, 60Hz	341.3	24.6	11.7	3.5	H	39.8	46.0	6.2
	389.1	23.1	12.9	4.0	H	40.0	46.0	6.0
	508.7	19.7	15.1	4.8	H	39.6	46.0	6.4
800x600, 60Hz	194.9	23.5	8.8	2.5	H	33.3	43.5	6.7
	341.5	21.6	11.7	3.5	H	39.7	46.0	6.3
	508.1	22.1	15.1	4.8	H	40.8	46.0	5.2
1024x768, 60Hz	71.9	22.3	9.4	1.6	V	33.3	40.0	6.7
	389.7	22.8	12.9	4.0	H	39.7	46.0	6.3
	508.6	20.9	15.1	4.8	H	40.8	46.0	5.2
1280x768, 60Hz	41.2	16.4	13.6	1.2	V	31.2	40.0	8.8
	72.8	21.4	9.1	1.6	V	32.1	40.0	7.9
	195.2	27.4	8.8	2.5	H	38.7	43.5	4.8
	243.1	23.5	10.4	2.8	H	36.7	46.0	9.3
	341.3	25.9	11.7	3.5	H	41.1	46.0	4.9
	389.1	23.5	12.9	4.0	H	40.4	46.0	5.6
	459.3	22.2	14.0	4.5	V	40.7	46.0	5.3
	508.4	21.7	15.1	4.8	H	41.6	46.0	4.4
1360x768, 60Hz	40.3	17.3	13.6	1.2	V	32.1	40.0	7.9
	73.0	23.0	9.1	1.6	V	33.7	40.0	6.3
	127.1	17.0	10.4	2.1	V	29.5	43.5	14.0
	146.0	17.4	11.8	2.2	V	31.4	43.5	12.1
	194.7	28.3	8.8	2.5	H	39.6	43.5	3.9
	219.1	23.6	8.4	2.7	H	34.7	46.0	11.3
	243.4	26.1	10.4	2.8	H	39.3	46.0	6.7
	267.7	21.5	11.5	2.9	V	35.9	46.0	10.1
	340.8	27.6	11.7	3.5	H	42.8	46.0	3.2
	389.4	24.6	12.9	4.0	H	41.5	46.0	4.5
	459.1	23.1	14.0	4.5	V	41.6	46.0	4.4
	508.5	22.8	15.1	4.8	H	42.7	46.0	3.3

Note:

**Appendix A. The Photos of Test Setup**



**Conducted Emissions - Front View**

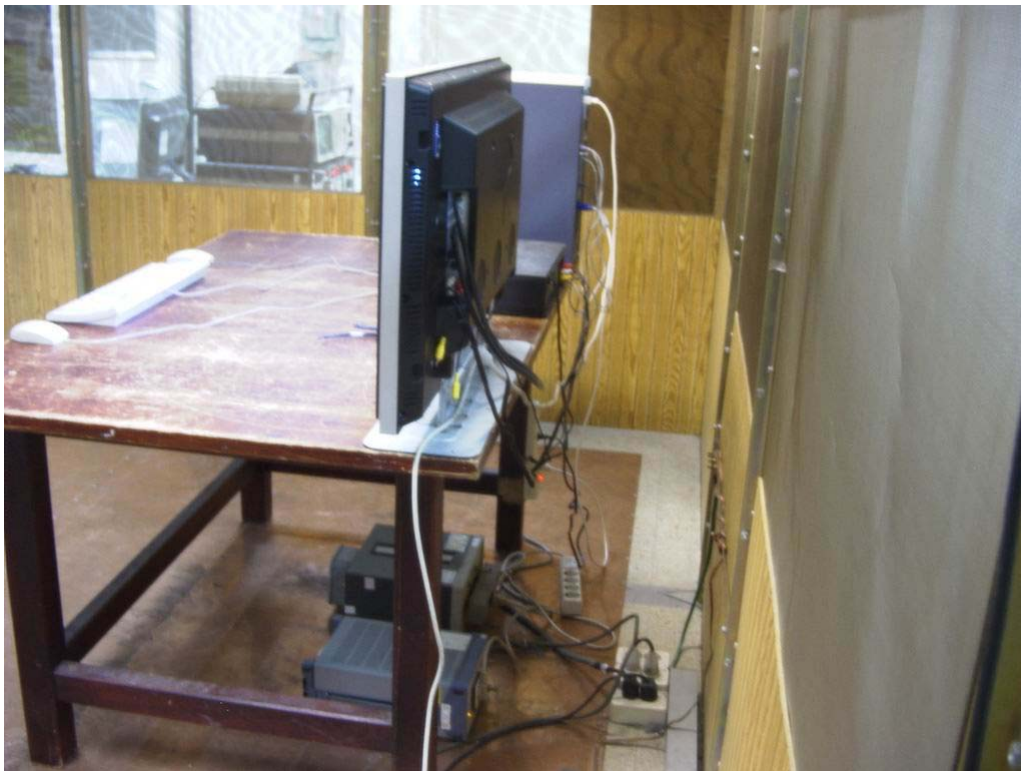

**Conducted Emissions - Rear View**

**Appendix A. The Photos of Test Setup**



**Radiated Emissions - Front View**



**Radiated Emissions - Rear View**

Appendix B. The Photos of Equipment Under Test




Front View



Rear View

Appendix B. The Photos of Equipment Under Test

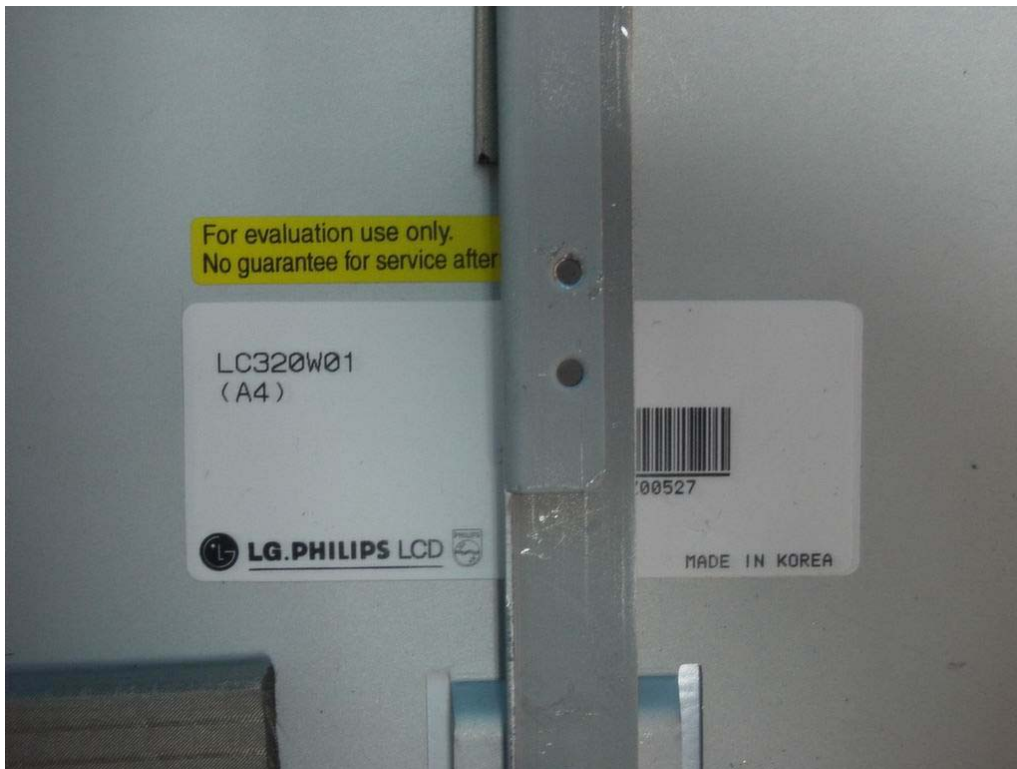

LCD Panel Label



EUT Label