



No. L0442



No. DAT-P-114/01-10

# TEST REPORT

**No. SAR2004010**

Test name	Electromagnetic Field (Specific Absorption Rate)
Product	GSM Tri-band Digital Mobile Phone
Model	DF9
Client	Amoi Electronics Co., Ltd.
Type of test	Entrusted



## **GENERAL TERMS**

1. The test report is invalid if not marked with “exclusive stamp for the test report” or the stamp of the test center.
2. Any copy of the test report is invalid if not re-marked with the “exclusive stamp for the test report” or the stamp of the test center.
3. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
4. The test report is invalid if there is any evidence of erasure and/or falsification.
5. If there is any dissidence for the test report, please file objection to the test center within 15 days from the date of receiving the test report.
6. Normally, entrust test is only responsible for the samples that have undergone the test.
7. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permissions of the test center.

Address: No. 52, Huayuanbei Road, Beijing, P. R. China

Post code: 100083

Cable: 04282

Telephone: +86 10 62302041

Fax: +86 10 62304793

**Telecommunication Metrology Center  
of Ministry of Information Industry**


No. SAR2004010

Page 3 of 86

**GENERAL SUMMARY**


<b>Product</b>	GSM Tri-band Digital Mobile Phone	<b>Model</b>	DF9
<b>Client</b>	Amoi Electronics Co., Ltd	<b>Manufacturer</b>	Amoi Electronics Co., Ltd
<b>Type of test</b>	Entrusted	<b>Arrival Date of sample</b>	Jun. 15 <sup>th</sup> , 2004
<b>Place of sampling</b>	(Blank)	<b>Carrier of the samples</b>	Mr. Li Cheng
<b>Quantity of the samples</b>	One	<b>Date of product</b>	(Blank)
<b>Base of the samples</b>	(Blank)	<b>Items of test</b>	SAR
<b>Series number</b>	351815000000170		
<b>Standard(s)</b>	EN 50360-2001: Product standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones. EN 50361-2001: Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones. IEC 62209 Draft: Procedure to Determine the Specific Absorption Rate(SAR) for Hand-hold Mobile Phone (Part 2) ANSI C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz OET Bulletin 65 (Edition 97-01) and Supplement C(Edition 01-01): Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits. IEEE 1528-2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.		
<b>Conclusion</b>	Localized Specific Absorption Rate (SAR) of this portable wireless equipment has been measured in all cases requested by the relevant standards cited in Clause 5.2 of this test report. Maximum localized SAR is below exposure limits specified in the relevant standards cited in Clause 5.1 of this test report.  General Judgment: Pass		
<b>Comment</b>	TX Freq. Band: 1850-1910 MHz (PCS) Max. Power: 1 Watt (PCS) Antenna Character: 21mm The test result only responds to the measured sample.		

Approved by



(Lu Minniu)

Revised by



(Wang Hongbo)

Performed by



(Qi Dianyuan)



(Stamp)

Date of issue: Jul 23<sup>th</sup>, 2004

---

**TABLE OF CONTENT**

<b>1 COMPETENCE AND WARRANTIES .....</b>	<b>5</b>
<b>2 GENERAL CONDITIONS .....</b>	<b>5</b>
<b>3 DESCRIPTION OF EUT.....</b>	<b>5</b>
3.1 ADDRESSING INFORMATION RELATED TO EUT .....	5
3.2 CONSTITUENTS OF EUT .....	6
3.3 GENERAL DESCRIPTION.....	7
<b>4 OPERATIONAL CONDITIONS DURING TEST .....</b>	<b>7</b>
4.1 SCHEMATIC TEST CONFIGURATION.....	7
4.2 SAR MEASUREMENT SET-UP.....	8
4.3 DASY4 E-FIELD PROBE SYSTEM .....	9
4.4 E-FIELD PROBE CALIBRATION .....	9
4.5 OTHER TEST EQUIPMENT .....	10
4.5.1 DEVICE HOLDER FOR TRANSMITTERS.....	10
4.5.2 PHANTOM .....	10
4.6 EQUIVALENT TISSUES.....	11
4.7 SYSTEM SPECIFICATIONS .....	11
4.7.1 ROBOTIC SYSTEM SPECIFICATIONS.....	11
<b>5 CHARACTERISTICS OF THE TEST .....</b>	<b>12</b>
5.1 APPLICABLE LIMIT REGULATIONS.....	12
5.2 APPLICABLE MEASUREMENT STANDARDS .....	12
5.3 CHARACTER OF THE TEST .....	12
<b>6 LABORATORY ENVIRONMENT .....</b>	<b>13</b>
<b>7 TEST RESULTS.....</b>	<b>13</b>
7.1 DIELECTRIC PERFORMANCE .....	13
7.2 SYSTEM VALIDATION.....	13
7.3 SUMMARY OF MEASUREMENT RESULTS (HEAD, PCS 1900 MHz BAND) .....	14
7.4 SUMMARY OF MEASUREMENT RESULTS (BODY-WORN, PCS 1900 MHz BAND) .....	16
7.5 CONCLUSION .....	16
<b>8 MEASUREMENT UNCERTAINTY.....</b>	<b>17</b>
<b>9 MAIN TEST INSTRUMENTS .....</b>	<b>18</b>
<b>10 TEST PERIOD .....</b>	<b>19</b>
<b>11 TEST LOCATION .....</b>	<b>19</b>
<b>ANNEX A : MEASUREMENT PROCESS .....</b>	<b>20</b>
<b>ANNEX B : TEST LAYOUT .....</b>	<b>21</b>
<b>ANNEX C: GRAPH RESULTS.....</b>	<b>26</b>
<b>ANNEX D SYSTEM VALIDATION RESULTS .....</b>	<b>86</b>

## **1 COMPETENCE AND WARRANTIES**

**Telecommunication Metrology Center of Ministry of Information Industry** is a test laboratory accredited by DAR (DATech) – Deutschen Akkreditierungs Rat (Deutsche Akkreditierungsstelle Technik) for the tests indicated in the Certificate No. **DAT-P-114/01-10**.

**Telecommunication Metrology Center of Ministry of Information Industry** is a test laboratory accredited by CNAL – China National Accreditation Committee for Laboratories, for the tests indicated in the Certificate No. **L0442**.

Telecommunication Metrology Center of Ministry of Information Industry is a test laboratory competent to carry out the tests described in this test report.

**Telecommunication Metrology Center of Ministry of Information Industry** guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at **Telecommunication Metrology Center of Ministry of Information Industry** at the time of execution of the test.

**Telecommunication Metrology Center of Ministry of Information Industry** is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test.

## **2 GENERAL CONDITIONS**

- 2.1 This report only refers to the item that has undergone the test.
- 2.2 This report standalone dose not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities.
- 2.3 This document is only valid if complete; no partial reproduction can be made without written approval of Telecommunication Metrology Center of Ministry of Information Industry.
- 2.4 This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of Telecommunication Metrology Center of Ministry of Information Industry and the Accreditation Bodies, if it applies.

## **3 DESCRIPTION OF EUT**

### **3.1 Addressing Information Related to EUT**

**Table 1: Applicant (The Client)**

Name or Company	Amoi Electronics Co., Ltd
Address/Post	No.45, Tiyu road, Xiamen, Fujina
City	Xiamen
Postal Code	361012
Country	China
Telephone	0592-6516777-3330
Fax	0592-6516007

**Telecommunication Metrology Center  
of Ministry of Information Industry**

No. SAR2004010

Page 6 of 86

**Table 2: Manufacturer**

Name or Company	Amoi Electronics Co., Ltd
Address/Post	No.45, Tiyu road, Xiamen, Fujina
City	Xiamen
Postal Code	361012
Country	China
Telephone	0592-6516777-3330
Fax	0592-6516007

**3.2 Constituents of EUT**

**Table 3: Constituents of Samples**

Description	Model	Serial Number	Manufacturer
Handset	DF9	351815000000170	Amoi Electronics Co., Ltd
Lithium Battery	DF9	/	Amoi Electronics Co., Ltd
AC/DC Adapter	TF9	/	TAMURA Electronics(Shenzhen) Ltd.





**Figure 1: Constituents of the sample (Lithium Battery is in the Handset)**

### **3.3 General Description**

Equipment Under Test (EUT) is a model of GSM Phase II portable Mobile Station (MS) with non-integrated antenna. It consists of Handset and normal options: Lithium Battery and AC/DC Adapter as Table 3 and Fig.1. It has the GPRS function. The Class is 10.

The sample undergoing test was selected by the Client.

Components list please refer to documents of the manufacturer.

## **4 OPERATIONAL CONDITIONS DURING TEST**

### **4.1 Schematic Test Configuration**

During SAR test, EUT is in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, and a call is established. Upon the client's request, only the band of PCS 1900 MHz will be tested and the result will be showed in this report. The Absolute Radio Frequency Channel Number (ARFCN) is allocated to 512, 661 and 810 respectively in the case of PCS 1900 MHz. The EUT is commanded to operate at maximum transmitting power.


The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the manufacturer. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link is used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset.

The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the handset by at least 30 dB.

#### **4.2 SAR Measurement Set-up**

These measurements were performed with the automated near-field scanning system DASY4 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9m) which positions the probes with a positional repeatability of better than  $\pm 0.02$ mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines (length =300mm) to the data acquisition unit.

A cell controller system contains the power supply, robot controller, teaches pendant (Joystick), and remote control, is used to drive the robot motors. The PC consists of the Micron Pentium III 800 MHz computer with Windows 2000 system and SAR Measurement Software DASY4, A/D interface card, monitor, mouse, and keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

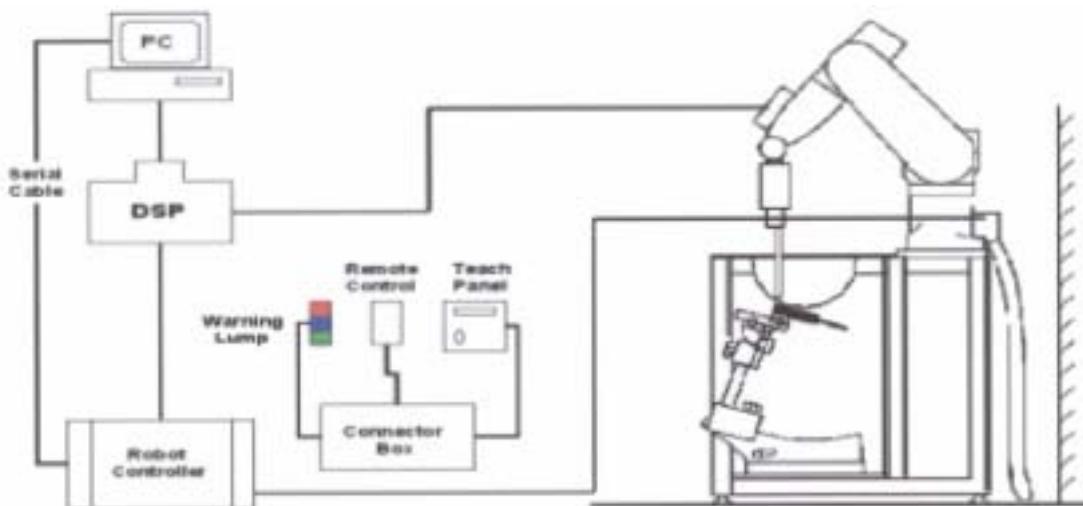

**Figure 2. SAR Lab Test Measurement Set-up**

The DAE3 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

#### 4.3 Dasy4 E-field Probe System

The SAR measurements were conducted with the dosimetric probe ET3DV6 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the standard procedure with an accuracy of better than  $\pm 10\%$ . The spherical isotropy was evaluated and found to be better than  $\pm 0.25\text{dB}$ .

##### ET3DV6 Probe Specification

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection System(ET3DV6 only) Built-in shielding against static charges PEEK enclosure material(resistant to organic solvents, e.q., glycol)
Calibration	In air from 10 MHz to 2.5 GHz In brain and muscle simulating tissue at frequencies of 450MHz, 900MHz and 1.8GHz (accuracy $\pm 8\%$ ) Calibration for other liquids and frequencies upon request
Frequency	10 MHz to $> 6$ GHz; Linearity: $\pm 0.2$ dB (30 MHz to 3 GHz)
Directivity	$\pm 0.2$ dB in brain tissue (rotation around probe axis) $\pm 0.4$ dB in brain tissue (rotation normal probe axis)
Dynamic Range	5u W/g to $> 100\text{mW/g}$ ; Linearity: $\pm 0.2\text{dB}$
Surface Detection	$\pm 0.2$ mm repeatability in air and clear liquids over diffuse reflecting surface(ET3DV6 only)
Dimensions	Overall length: 330mm Tip length: 16mm Body diameter: 12mm Tip diarneter: 6.8mm Distance from probe tip to dipole centers: 2.7mm
Application	General dosimetry up to 3GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms



**Figure 3. ET3DV6 E-field Probe**



**Figure 4. ET3DV6 E-field probe**

#### 4.4 E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy was evaluated and found to be better than  $\pm 0.25\text{dB}$ . The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and

the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where:  $\Delta t$  = Exposure time (30 seconds),

$C$  = Heat capacity of tissue (brain or muscle),

$\Delta T$  = Temperature increase due to RF exposure.

Or

$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where:

$\sigma$  = Simulated tissue conductivity,

$\rho$  = Tissue density (kg/m<sup>3</sup>).

## **4.5 Other Test Equipment**

### **4.5.1 Device Holder for Transmitters**

In combination with the Generic Twin Phantom V3.0, the Mounting Device (POM) enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeat ably positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



**Figure 5. Device Holder**

### **4.5.2 Phantom**

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three

points in the robot.

Shell Thickness    2±0.1 mm  
 Filling Volume    Approx. 20 liters  
 Dimensions        810 x 1000 x 500 mm (H x L x W)  
 Available         Special

#### **4.6 Equivalent Tissues**

The liquid used for the frequency range of 800-2000 MHz consisted of water, sugar, salt and Cellulose. The liquid has previously been proven to be suited for worst-case. The Table 4 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEEE 1528.



**Figure 6. Generic Twin Phantom**

**Table 4. Composition of the Head Tissue Equivalent Matter**

MIXTURE %	FREQUENCY 1850-1910MHz
Water	55.242
Glycol monobutyl	44.452
Salt	0.306
Dielectric Parameters Target Value	f=1900MHz $\epsilon=40.0$ $\sigma=1.40$

**Table 5. Composition of the Body Tissue Equivalent Matter**

MIXTURE %	FREQUENCY 1900MHz
Water	69.91
Glycol monobutyl	29.96
Salt	0.13
Dielectric Parameters Target Value	f=1900MHz $\epsilon=53.3$ $\sigma=1.52$

#### **4.7 System Specifications**

##### **4.7.1 Robotic System Specifications**

###### **Specifications**

**Positioner:** Stäubli Unimation Corp. Robot Model: RX90L

**Repeatability:** ±0.02 mm

**No. of Axis:** 6

###### **Data Acquisition Electronic (DAE) System**

###### **Cell Controller**

**Processor:** Pentium III

**Clock Speed:** 800 MHz

**Operating System:** Windows 2000

**Data Converter**

**Features:** Signal Amplifier, multiplexer, A/D converter, and control logic

**Software:** DASY4 software

**Connecting Lines:** Optical downlink for data and status info.

Optical uplink for commands and clock

## **5 CHARACTERISTICS OF THE TEST**

### **5.1 Applicable Limit Regulations**

**EN 50360–2001:** Product standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones.

It specifies the maximum exposure limit of **2.0 W/kg** as averaged over any 10 gram of tissue for portable devices being used within 20 mm of the user in the uncontrolled environment.

**ANSI C95.1–1999:** IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 mm of the user in the uncontrolled environment.

### **5.2 Applicable Measurement Standards**

**EN 50361–2001:** Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones.

**IEC 62209 Draft :** Procedure to Determine the Specific Absorption Rate(SAR) for Hand-hold Mobile Phone (Part 2)

**OET Bulletin 65 (Edition 97-01) and Supplement C(Edition 01-01):** Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits.

**IEEE 1528–2003:** Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.

They specify the measurement method for demonstration of compliance with the SAR limits for such equipments.

### **5.3 Character of the Test**

Handsets that are held on the side of a person's head next to the ear have been tested using realistic-shaped head phantoms.

Since it may be used for body-worn situation, the mobile phone is test with the flat phantom to simulate this case.

## **6 LABORATORY ENVIRONMENT**

**Table 6: The Ambient Conditions during EMF Test**

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 Ω
Ambient noise is checked and found very low and in compliance with requirement of standards.	
Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

## **7 TEST RESULTS**

### **7.1 Dielectric Performance**

**Table 7: Dielectric Performance of Head Tissue Simulating Liquid**

Measurement is made at temperature 22.5 °C and relative humidity 49%.			
Liquid temperature during the test: 21.4°C			
/	Frequency	Permittivity ε	Conductivity σ (S/m)
<b>Target value</b>	1900 MHz	40.0	1.40
<b>Measurement value (Average of 10 tests)</b>	1900 MHz	40.1	1.41

**Table 8: Dielectric Performance of Body Tissue Simulating Liquid**

Measurement is made at temperature 22.6 °C and relative humidity 51%.			
Liquid temperature during the test: 22.0°C			
/	Frequency	Permittivity ε	Conductivity σ (S/m)
<b>Target value</b>	1900 MHz	53.30	1.52
<b>Measurement value (Average of 10 tests)</b>	1900 MHz	52.9	1.54

### **7.2 System Validation**

**Table 9: System Validation**

Measurement is made at temperature 23.3 °C, relative humidity 47%, input power 250 mW.				
Liquid temperature during the test: 22.6°C				
Liquid parameters	Frequency	Permittivity ε	Conductivity σ (S/m)	
	1900 MHz	40.1	1.41	
Verification results	Frequency	Target value (W/kg)	Measurement value (W/kg)	
		10 g Average	1 g Average	10 g Average
1900 MHz	5.31	10.1	4.91	9.8

**7.3 Summary of Measurement Results (Head, PCS 1900 MHz Band)**

**Table 10: SAR Values (PCS 1900 MHz Band, head)**

Temperature: 22 °C, humidity: 50%.

Liquid temperature during the test: 22.2°C

Limit of SAR (W/kg)	10 g Average	1 g Average	Conducted Power before/after each test (dBm)
	2.0	1.6	
Test Case	Measurement Result (W/kg)		
	10 g Average	1 g Average	
Left hand, Touch cheek, Top frequency	0.516	0.903	<b>29.7/29.9</b>
Left hand, Touch cheek, Mid frequency	0.554	0.982	<b>29.9/29.7</b>
Left hand, Touch cheek, Bottom frequency	<b>0.568</b>	<b>1.03</b>	<b>29.8/29.7</b>
Left hand, Tilt 15 Degree, Top frequency	0.184	0.224	<b>29.9/30.0</b>
Left hand, Tilt 15 Degree, Mid frequency	0.212	0.273	<b>29.9/29.7</b>
Left hand, Tilt 15 Degree, Bottom frequency	0.233	0.306	<b>29.5/29.6</b>
Right hand, Touch cheek, Top frequency	0.434	0.833	<b>29.5/29.4</b>
Right hand, Touch cheek, Mid frequency	0.448	0.840	<b>29.7/29.9</b>
Right hand, Touch cheek, Bottom frequency	0.517	0.938	<b>29.8/29.6</b>
Right hand, Tilt 15 Degree, Top frequency	0.094	0.126	<b>29.7/29.6</b>
Right hand, Tilt 15 Degree, Mid frequency	0.122	0.171	<b>29.9/30.0</b>
Right hand, Tilt 15 Degree, Bottom frequency	0.104	0.112	<b>29.8/29.9</b>

**Telecommunication Metrology Center  
of Ministry of Information Industry**

No. SAR2004010

Page 15 of 86

**Table 11: SAR Values (PCS 1900 MHz Band, head\_GPRS Crest Factor 1:4)**

Temperature: 22 °C, humidity: 50%.

Liquid temperature during the test: 22.2°C

Limit of SAR (W/kg)	10 g Average	1 g Average	Conducted Power before/after each test (dBm)	
	2.0	1.6		
Test Case	Measurement Result (W/kg)			
	10 g Average	1 g Average		
Left hand, Touch cheek, Top frequency	0.574	1.05	<b>29.7/29.8</b>	
Left hand, Touch cheek, Mid frequency	0.621	1.16	<b>29.9/29.8</b>	
Left hand, Touch cheek, Bottom frequency	0.642	1.22	<b>29.6/29.8</b>	
Left hand, Tilt 15 Degree, Top frequency	0.191	0.235	<b>29.9/30.0</b>	
Left hand, Tilt 15 Degree, Mid frequency	0.222	0.289	<b>29.9/29.7</b>	
Left hand, Tilt 15 Degree, Bottom frequency	0.245	0.326	<b>29.5/29.6</b>	
Right hand, Touch cheek, Top frequency	0.481	0.971	<b>29.5/29.4</b>	
Right hand, Touch cheek, Mid frequency	0.497	0.981	<b>29.7/29.5</b>	
Right hand, Touch cheek, Bottom frequency	0.578	1.1	<b>29.8/29.6</b>	
Right hand, Tilt 15 Degree, Top frequency	0.097	0.129	<b>29.7/29.6</b>	
Right hand, Tilt 15 Degree, Mid frequency	0.125	0.176	<b>29.9/30.0</b>	
Right hand, Tilt 15 Degree, Bottom frequency	0.109	0.118	<b>29.8/29.9</b>	

**Telecommunication Metrology Center  
of Ministry of Information Industry**

No. SAR2004010

Page 16 of 86

**7.4 Summary of Measurement Results (Body-Worn, PCS 1900 MHz Band)**

**Table 12: SAR Values (PCS 1900 MHz Band, body-worn)**

Temperature: 22 °C, humidity: 50%. Liquid temperature during the test: 22.2°C			
Limit of SAR (W/kg)	10 g Average	1 g Average	Conducted Power before/after each test (dBm)
	2.0	1.6	
Test Case	Measurement Result (W/kg)		
	10 g Average	1 g Average	
Display of EUT towards the ground, Top frequency	0.058	0.088	29.4/29.3
Display of EUT towards the ground, Mid frequency	0.060	0.091	29.8/29.9
Display of EUT towards the ground, Bottom frequency	0.061	0.095	29.5/29.6

**Table 13: SAR Values (PCS 1900 MHz Band, body-worn\_GPRS, Crest Factor 1:4)**

Temperature: 22 °C, humidity: 50%. Liquid temperature during the test: 22.2°C			
Limit of SAR (W/kg)	10 g Average	1 g Average	Conducted Power before/after each test (dBm)
	2.0	1.6	
Test Case	Measurement Result (W/kg)		
	10 g Average	1 g Average	
Display of EUT towards the ground, Top frequency	0.059	0.090	29.6/29.8
Display of EUT towards the ground, Mid frequency	0.061	0.093	29.8/29.9
Display of EUT towards the ground, Bottom frequency	0.062	0.097	29.9/30.0

### 7.5 Conclusion

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 5.2 of this report. Maximum localized SAR is below exposure limits specified in the relevant standards cited in Clause 5.1 of this test report.

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 5.2 of this report. Maximum localized SAR is below exposure limits specified in the relevant standards cited in Clause 5.1 of this test report.

## 8 Measurement Uncertainty

No.	Error source	Type	Uncertainty Value (%)	Probability Distribution	k	c <sub>i</sub>	Standard Uncertainty (%) u <sub>i</sub> (%)	Degree of freedom V <sub>eff</sub> or v <sub>i</sub>
1	System repetitivity	A	0.5	N	1	1	0.5	9
Measurement system								
2	- probe calibration	B	7	N	2	1	3.5	$\infty$
3	- axial isotropy of the probe	B	4.7	R	$\sqrt{3}$	$\sqrt{0.5}$	4.3	$\infty$
4	- hemisphere isotropy of the probe	B	9.4	R	$\sqrt{3}$	$\sqrt{0.5}$		
5	- spatial resolution	B	0	R	$\sqrt{3}$	1	0	$\infty$
6	- boundary effect	B	11.0	R	$\sqrt{3}$	1	6.4	$\infty$
7	- probe linearity	B	4.7	R	$\sqrt{3}$	1	2.7	$\infty$
8	- detection limit	B	1.0	R	$\sqrt{3}$	1	0.6	$\infty$
9	- electronic readout	B	1.0	N	1	1	1.0	$\infty$
10	- RF interference	B	3.0	R	$\sqrt{3}$	1	1.73	$\infty$
11	- probe mechanical positioning constraint	B	0.4	R	$\sqrt{3}$	1	0.2	$\infty$
12	- matching between probe and phantom references	B	2.9	R	$\sqrt{3}$	1	1.7	$\infty$
13	- SAR interpolation and extrapolation	B	3.9	R	$\sqrt{3}$	1	2.3	$\infty$
Uncertainties of the DUT								
14	- position of the DUT	A	4.9	N	1	1	4.9	5
15	- holder of the DUT	A	6.1	N	1	1	6.1	5

**Telecommunication Metrology Center  
of Ministry of Information Industry**

No. SAR2004010

Page 18 of 86

16	- drift of the output power	B	5.0	R	$\sqrt{3}$	1	2.9	$\infty$
physical parameters								
17	- phantom shell	B	1.0	R	$\sqrt{3}$	1	0.6	$\infty$
18	- liquid conductivity (deviation from target)	B	5.0	R	$\sqrt{3}$	0.6	1.7	$\infty$
19	- liquid conductivity(measurement error)	B	10.0	R	$\sqrt{3}$	0.6	3.4	$\infty$
20	- liquid permittivity(deviation from target)	B	5.0	R	$\sqrt{3}$	0.6	1.7	$\infty$
21	- liquid permittivity(measurement error)	B	5.0	R	$\sqrt{3}$	0.6	1.7	$\infty$
Combined standard uncertainty		$u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$				13.5	88.7	
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$		N	k=2	27		

## 9 MAIN TEST INSTRUMENTS

**Table 13: List of Main Instruments**

No.	Name	Type	Serial Number	Calibration Date	Valid Period	
01	Network analyzer	HP 8753C	3146A01905	August 18,2003	One year	
02	Dielectric Probe Kit	Agilent 85070C	US99360113	No Calibration Requested		
03	Power meter	HP 436A	2101A11858	August 19,2003	One year	
04	Power sensor	HP 8481H	2349A07289			
05	Signal Generator	MG 3633A	M73386	No Calibration Requested		
06	Amplifier	AT 50S1G4A	26549	No Calibration Requested		
07	Validation Kit 835MHz	SPEAG D 835V2	443	September 3, 2003	Two years	
08	Validation Kit 900MHz	SPEAG D 900V2	125	September 3, 2003	Two years	
09	Validation Kit 1800MHz	SPEAG D 1800V2	2d010	September 3, 2003	Two years	
10	Validation Kit 1900MHz	1900 V2	541	September 3, 2003	Two years	
11	BTS	CMU 200	100680	September 13, 2003	One year	
12	E-field Probe	SPEAG ET3DV6	1600	January 16, 2004	One year	
13	DAE	SPEAG DAE3	536	January 7, 2004	One year	

## **10 TEST PERIOD**

The test is performed from Jul 19<sup>th</sup>, 2004 to July 21, 2004.

## **11 TEST LOCATION**

The test is performed at  
Radio Communication & Electromagnetic Compatibility Laboratory of  
Telecommunication Metrology Center of  
Ministry of Information Industry of  
The People's Republic of China

\*\*\*END OF REPORT BODY\*\*\*

## **ANNEX A : MEASUREMENT PROCESS**

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point was measured and was used as a reference value for assessing the power drop.

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 3.9 mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 20 mm x 20 mm. Based on this data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Around this point, a volume of 32 mm x 32 mm x 34 mm was assessed by measuring 7 x 7 x 7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

a. The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.

b. The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot"-condition (in x ~ y and z-directions). The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.

c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation is repeated.


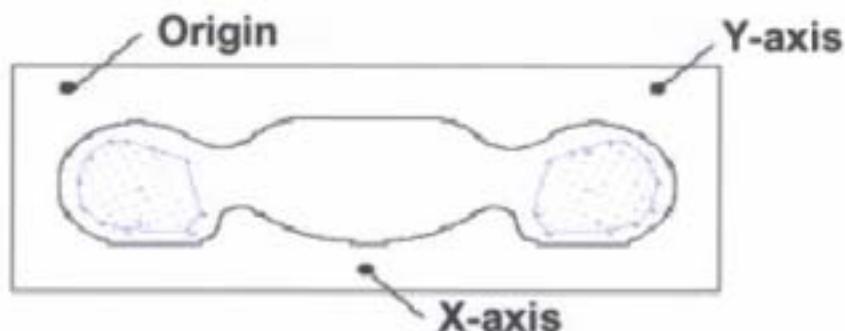


Figure 2 SAR Measurement Points in Area Scan

**ANNEX B : TEST LAYOUT**



Picture 1 Specific Absorption Rate Test Layout

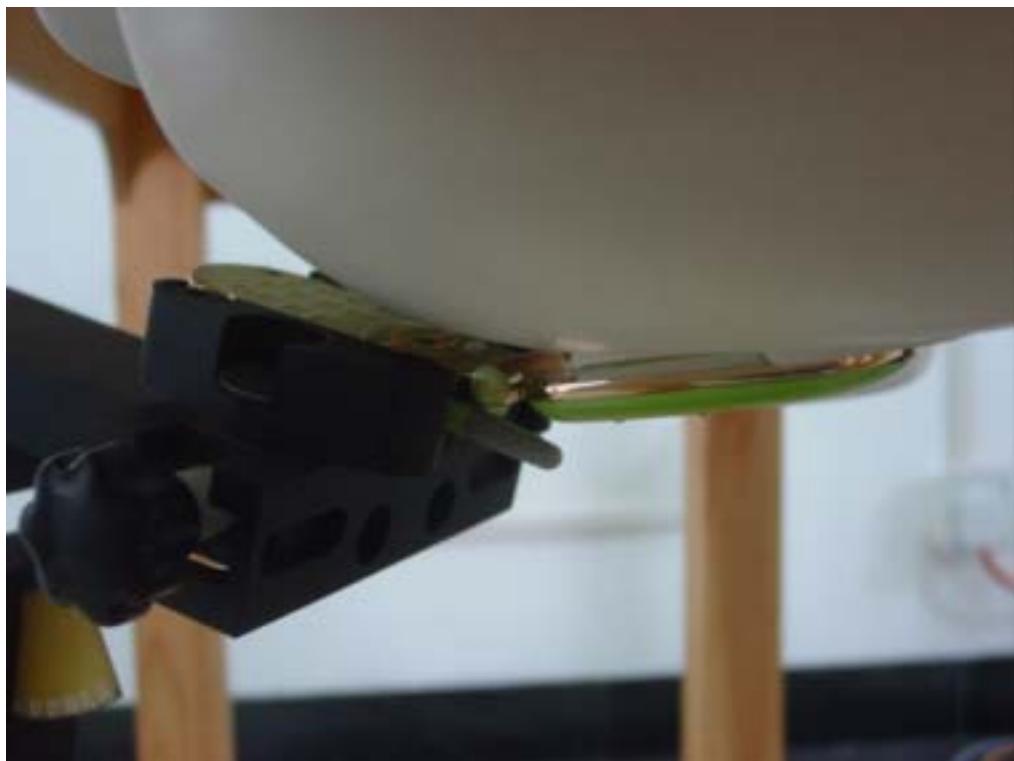

Picture 2 Left Hand Touch Cheek Position



Picture 3 Left Hand Tilt 15° Position




Picture 4 Right Hand Touch Cheek Position




Picture 5 Right Hand Tilt 15° Position



Picture 6 Flat Phantom -- Body-worn Position (toward ground, the distance from handset to the bottom of the Phantom is 1.5cm)

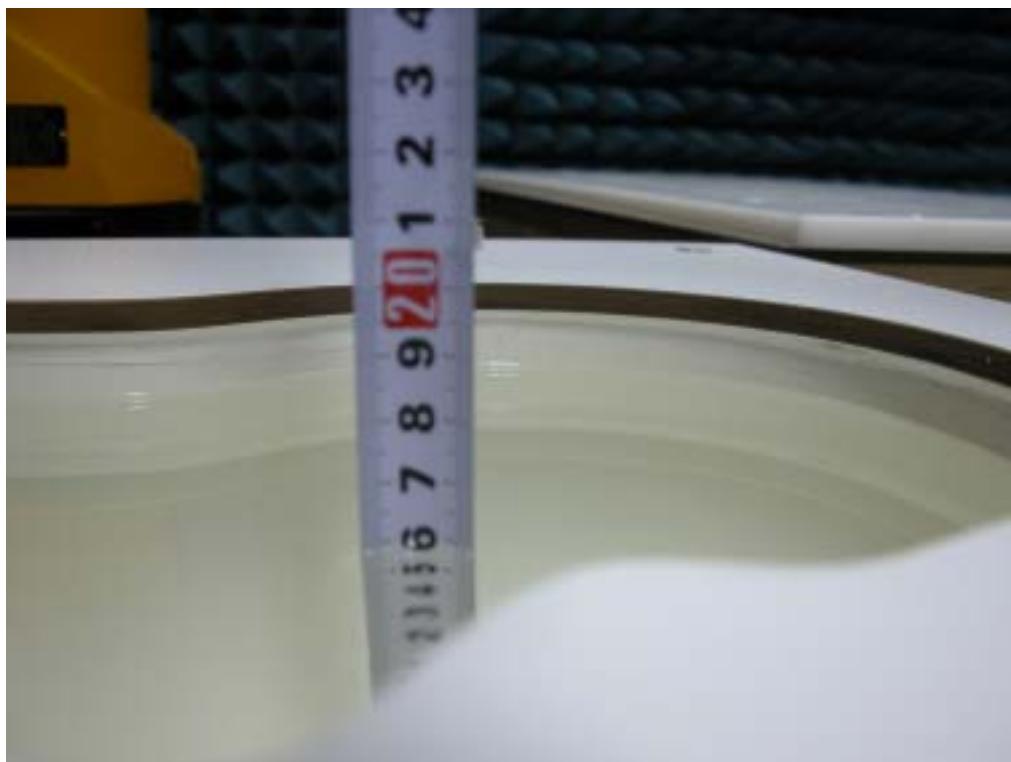

Picture 7 Liquid depth in the Head Phantom (Head,1900MHz)

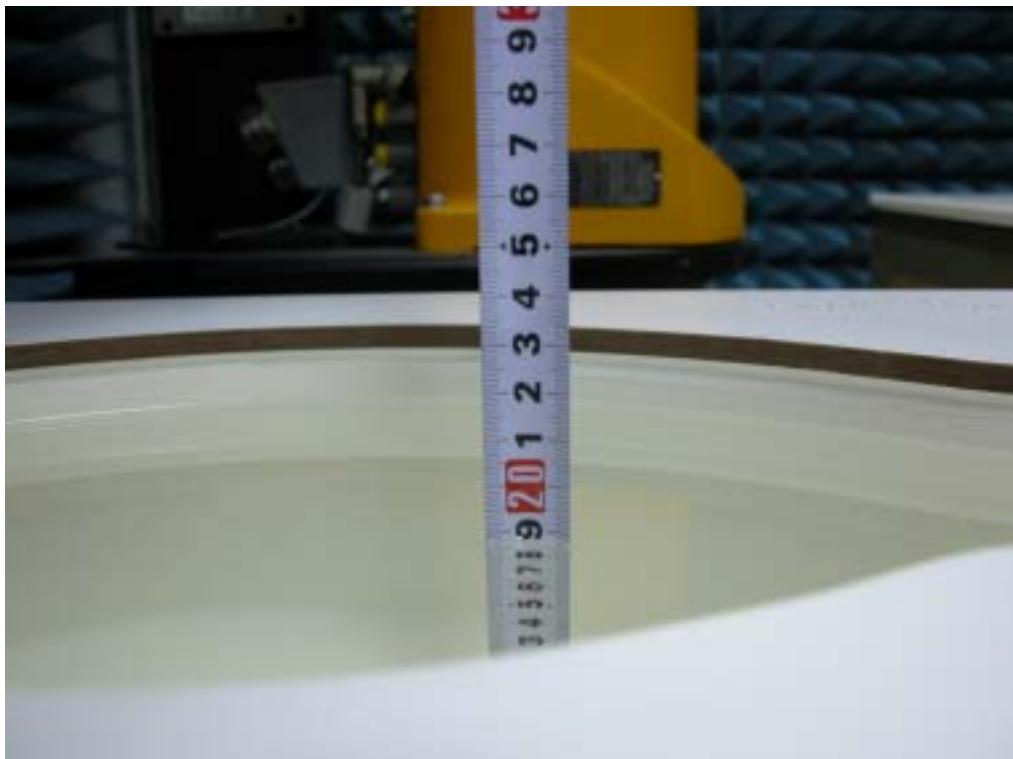

Picture 8 Liquid depth in the Flat Phantom (Body 1900MHz)

## ANNEX C: GRAPH RESULTS

### PCS 1900 Left Cheek Low

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Cheek Low/Area Scan (41x91x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 12 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.999 mW/g

**Cheek Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 1.11 mW/g

Peak SAR (extrapolated) = 1.47 W/kg

**SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.568 mW/g**


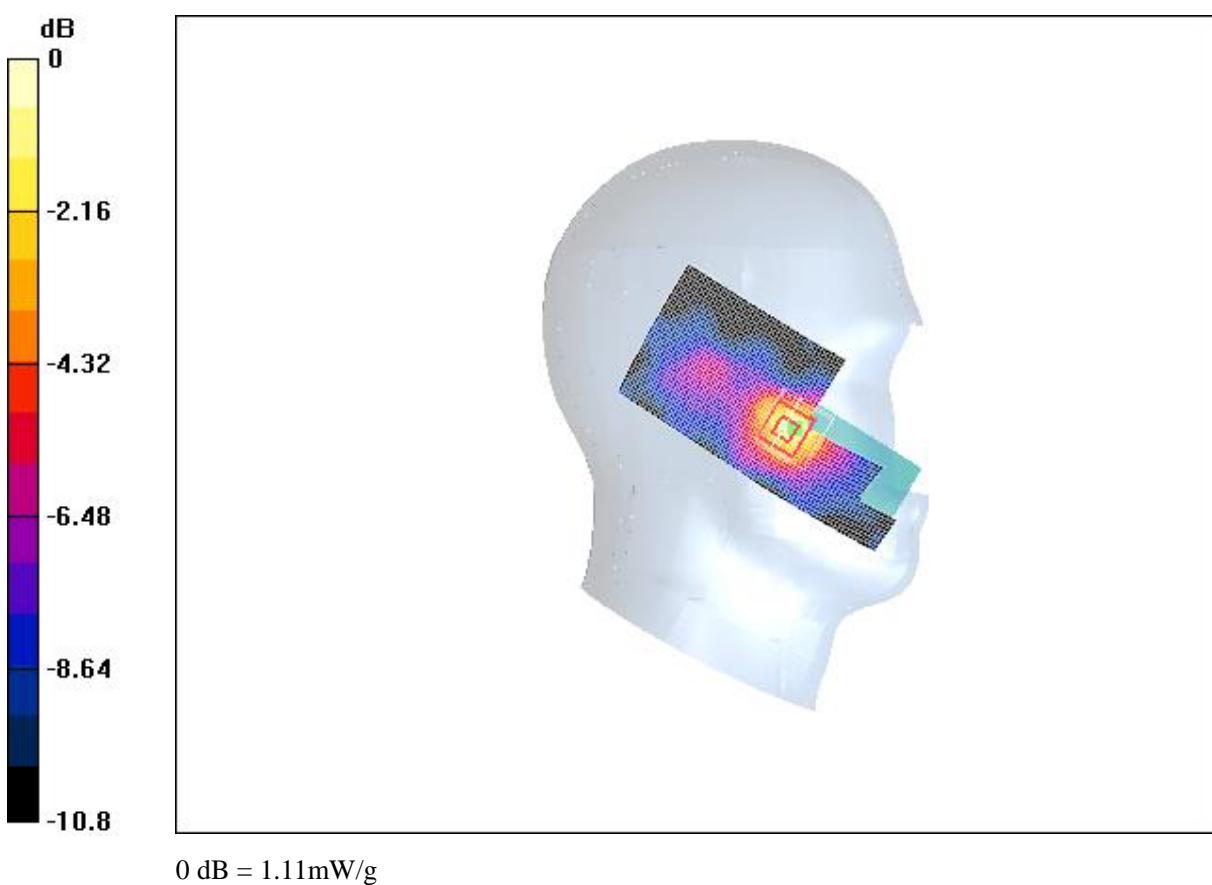


Fig. 1 Left Hand Touch Cheek 1900MHz CH512

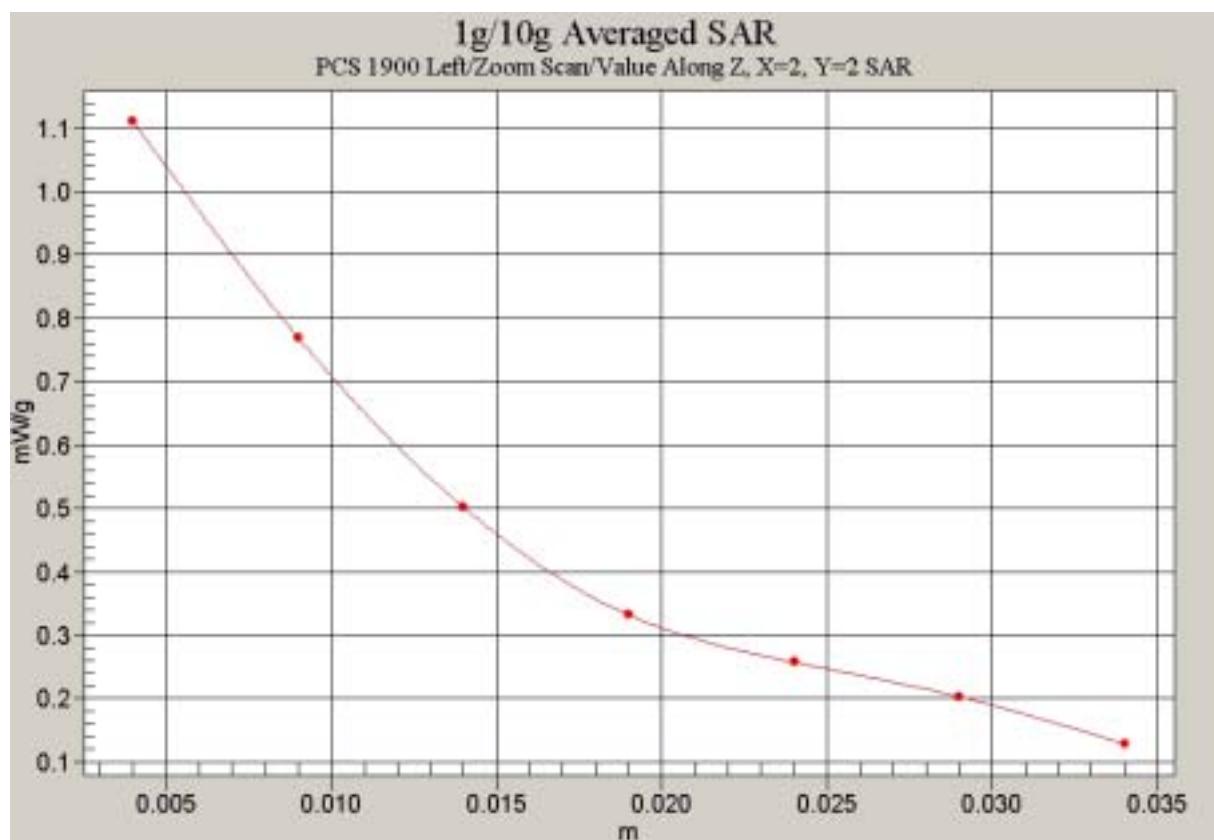

**Fig. 2 Z-Scan at power reference point (Left Hand Touch Cheek 1900MHz CH512)**

**PCS 1900 Left Cheek Middle**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Cheek Middle/Area Scan (41x91x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 12 V/m; Power Drift = -0.003 dB

Maximum value of SAR (interpolated) = 0.982 mW/g


**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12 V/m; Power Drift = -0.003 dB

Maximum value of SAR (measured) = 1.08 mW/g


Peak SAR (extrapolated) = 1.42 W/kg

**SAR(1 g) = 0.982 mW/g; SAR(10 g) = 0.554 mW/g**

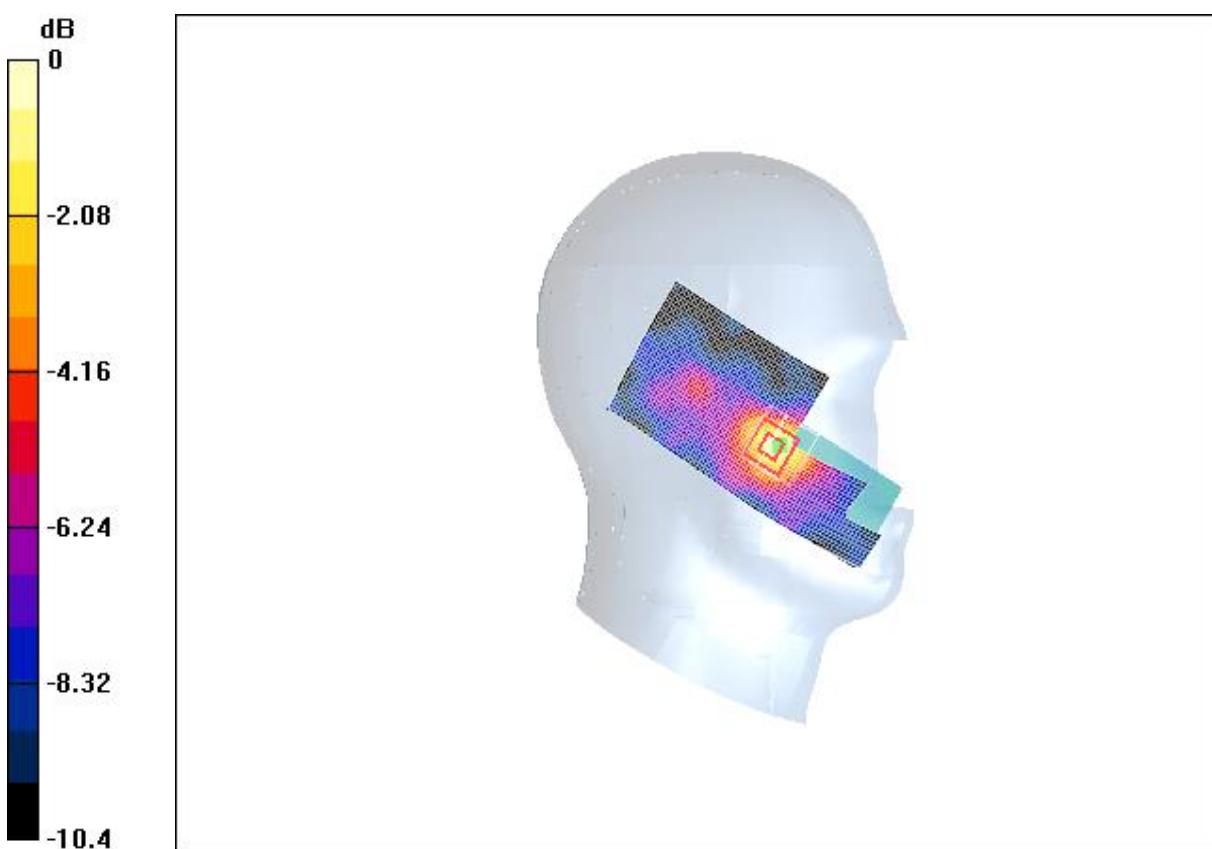

0 dB = 1.08mW/g

**Fig. 3 Left Hand Touch Cheek 1900MHz CH661**

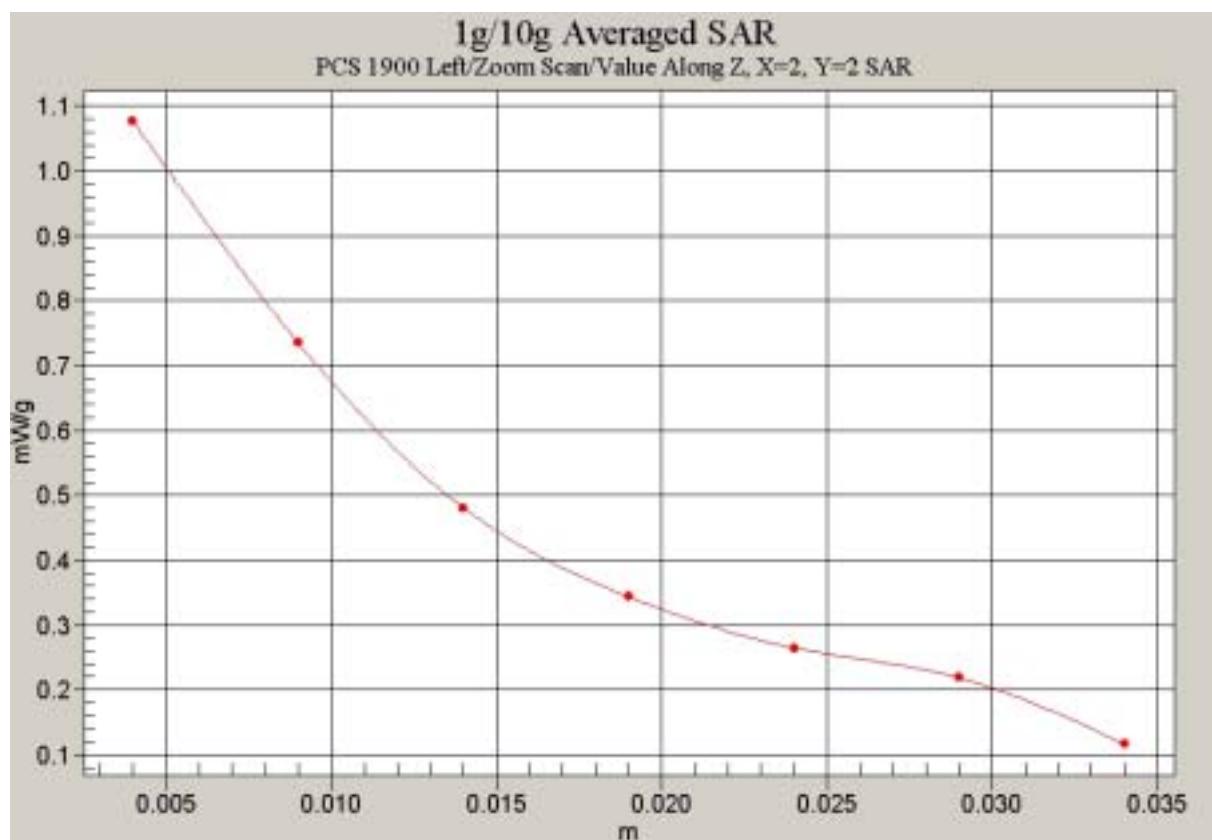

**Fig. 4 Z-Scan at power reference point (Left Hand Touch Cheek 1900MHz CH661**

**PCS 1900 Left Cheek High**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Cheek High/Area Scan (41x91x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 11.9 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.872 mW/g


**Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.9 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.992 mW/g


Peak SAR (extrapolated) = 1.29 W/kg

**SAR(1 g) = 0.903 mW/g; SAR(10 g) = 0.516 mW/g**

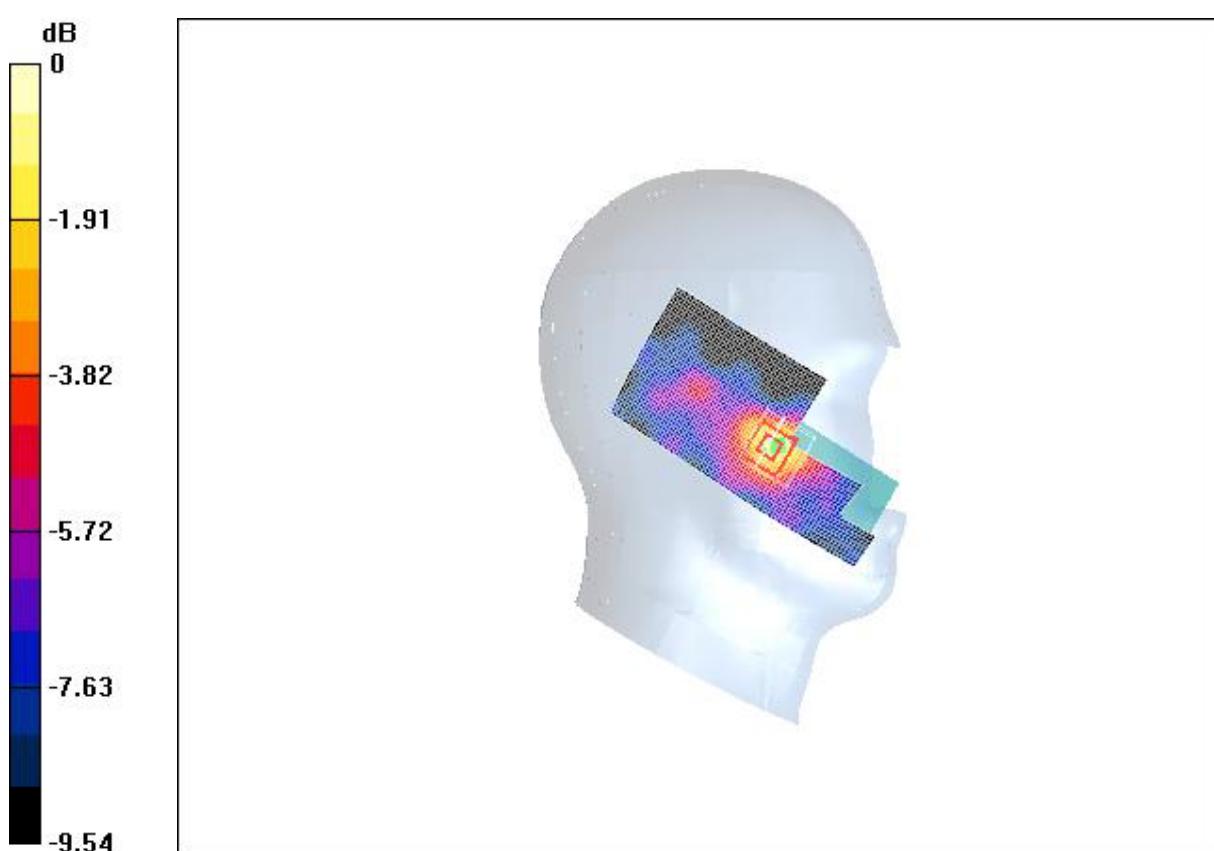

0 dB = 0.992mW/g

**Fig. 5 Left Hand Touch Cheek 1900MHz CH810**

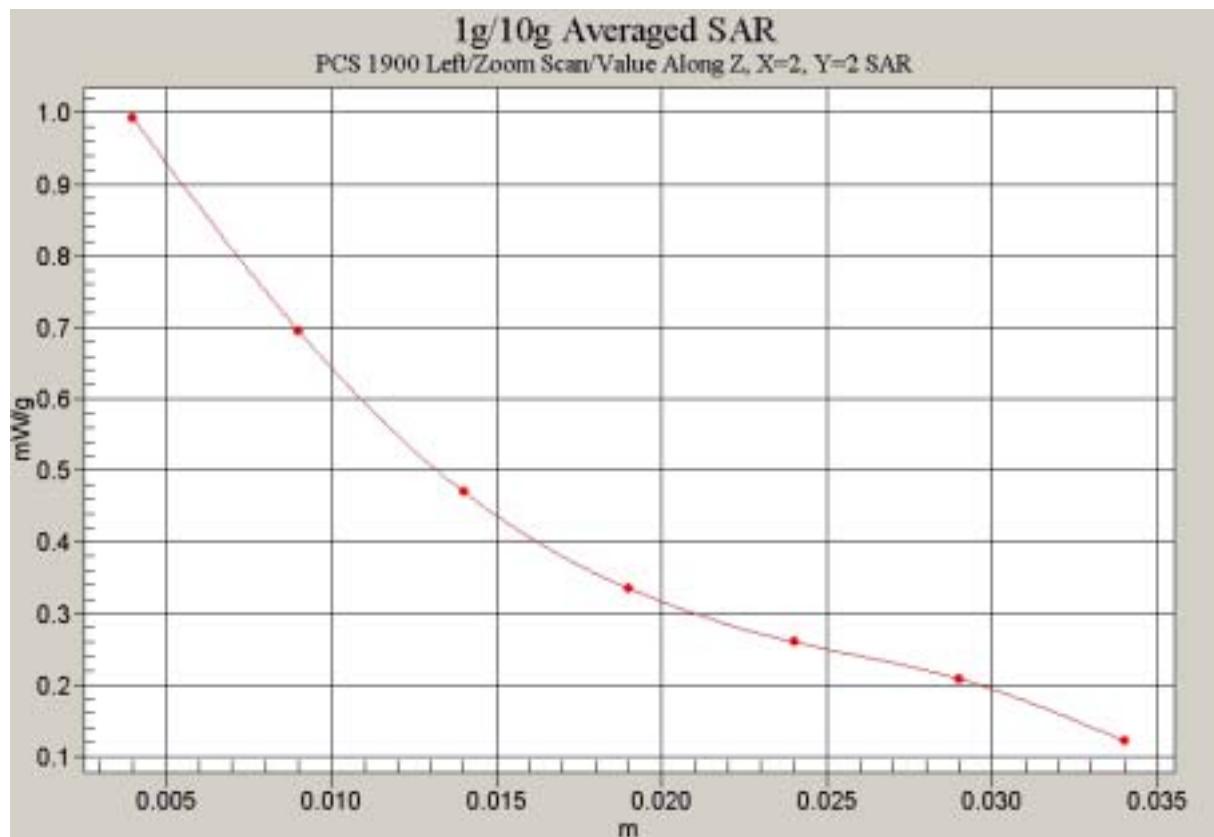

**Fig. 6 Z-Scan at power reference point (Left Hand Touch Cheek 1900MHz CH810)**

**PCS 1900 Left Tilt Low**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Tilt Low/Area Scan (41x91x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 14.7 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.372 mW/g


**Tilt Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.7 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.346 mW/g


Peak SAR (extrapolated) = 0.347 W/kg

**SAR(1 g) = 0.306 mW/g; SAR(10 g) = 0.233 mW/g**

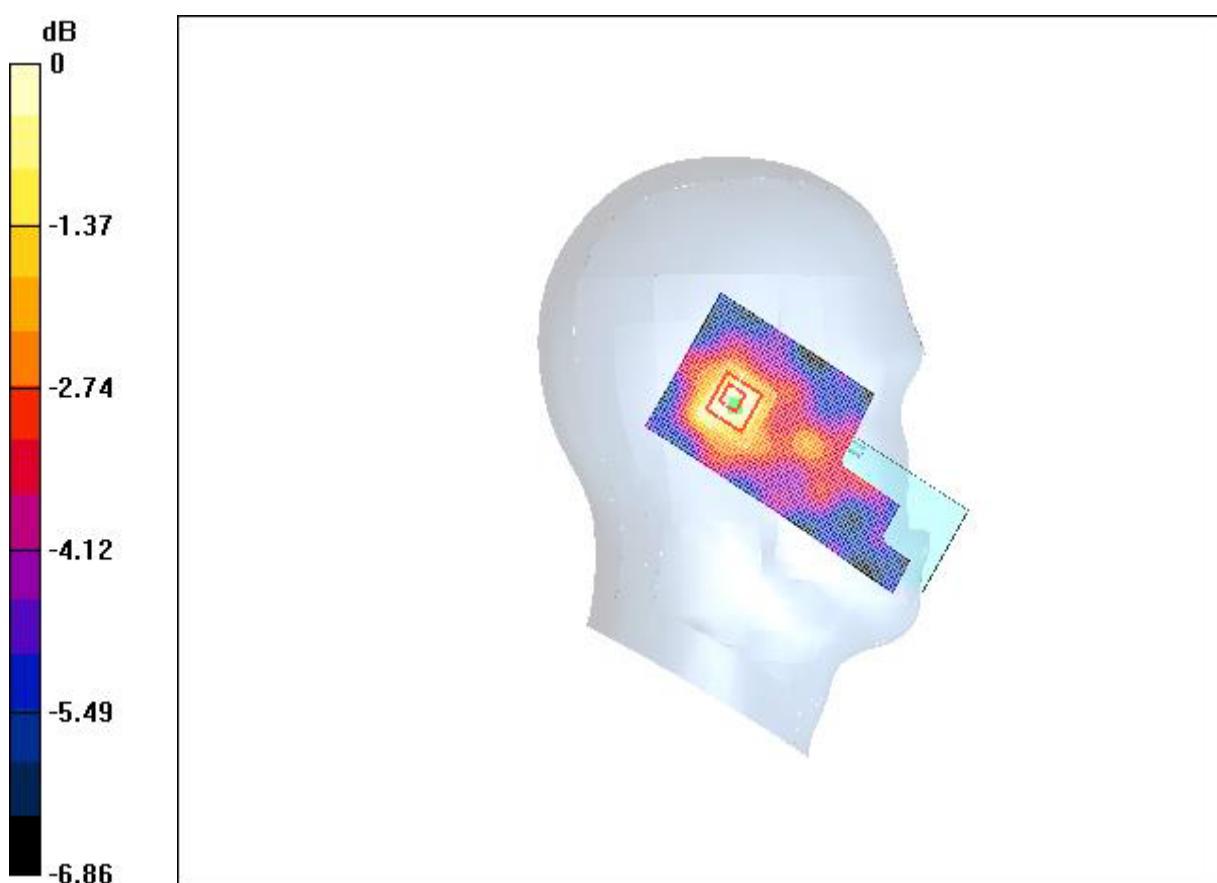

0 dB = 0.346mW/g

**Fig. 7 Left Hand Tilt 15° 1900MHz CH512**

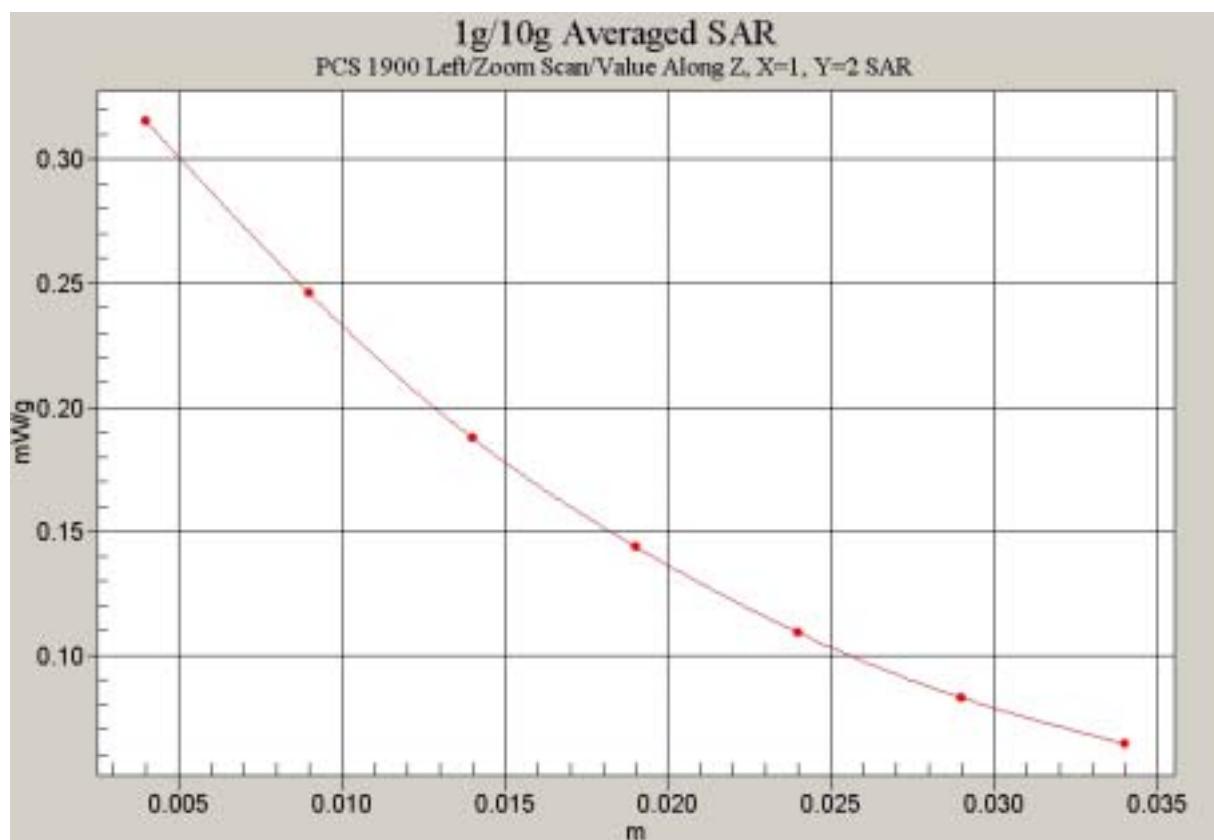

**Fig. 8 Z-Scan at power reference point (Left Hand Tilt 15° 1900MHz CH512)**

### PCS 1900 Left Tilt Middle

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Tilt Middle/Area Scan (41x91x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 14.1 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.344 mW/g


**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.1 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.296 mW/g


Peak SAR (extrapolated) = 0.319 W/kg

**SAR(1 g) = 0.273 mW/g; SAR(10 g) = 0.212 mW/g**

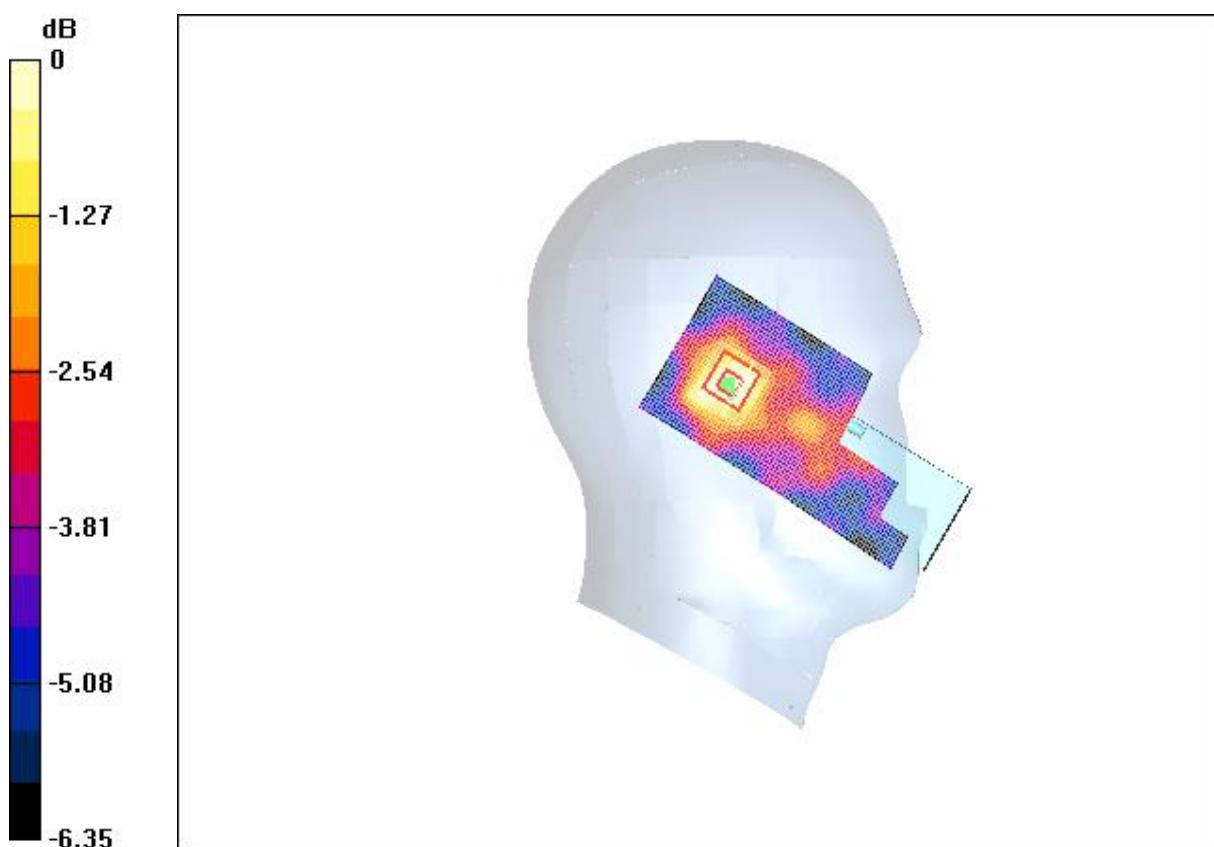

0 dB = 0.296mW/g

**Fig. 9 Left Hand Tilt 15° 1900MHz CH661**

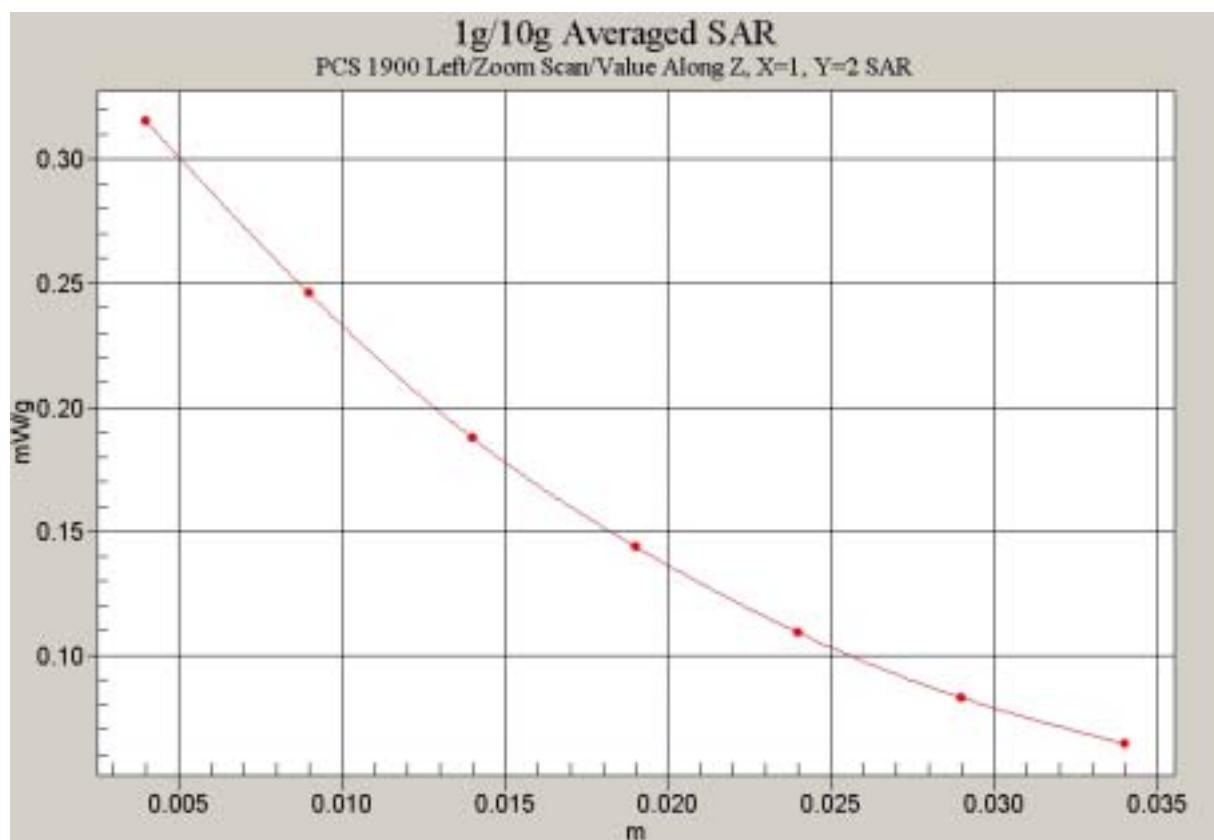

**Fig. 10 Z-Scan at power reference point (Left Hand Tilt 15° 1900MHz CH661)**

**PCS 1900 Left Tilt High**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Tilt High/Area Scan (41x91x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 13.1 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.304 mW/g


**Tilt High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.1 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.232 mW/g


Peak SAR (extrapolated) = 0.300 W/kg

**SAR(1 g) = 0.224 mW/g; SAR(10 g) = 0.184 mW/g**

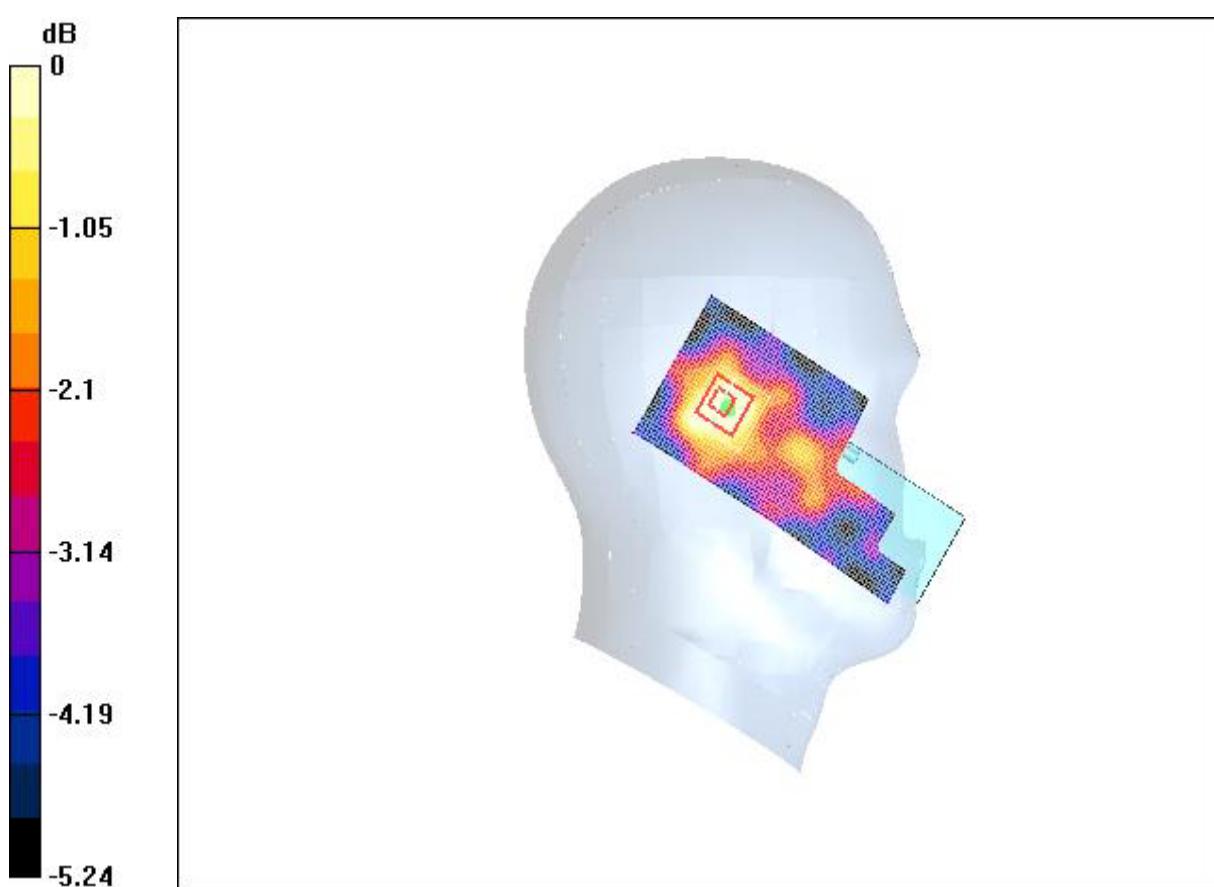

0 dB = 0.232mW/g

**Fig. 11 Left Hand Tilt 15° 1900MHz CH810**

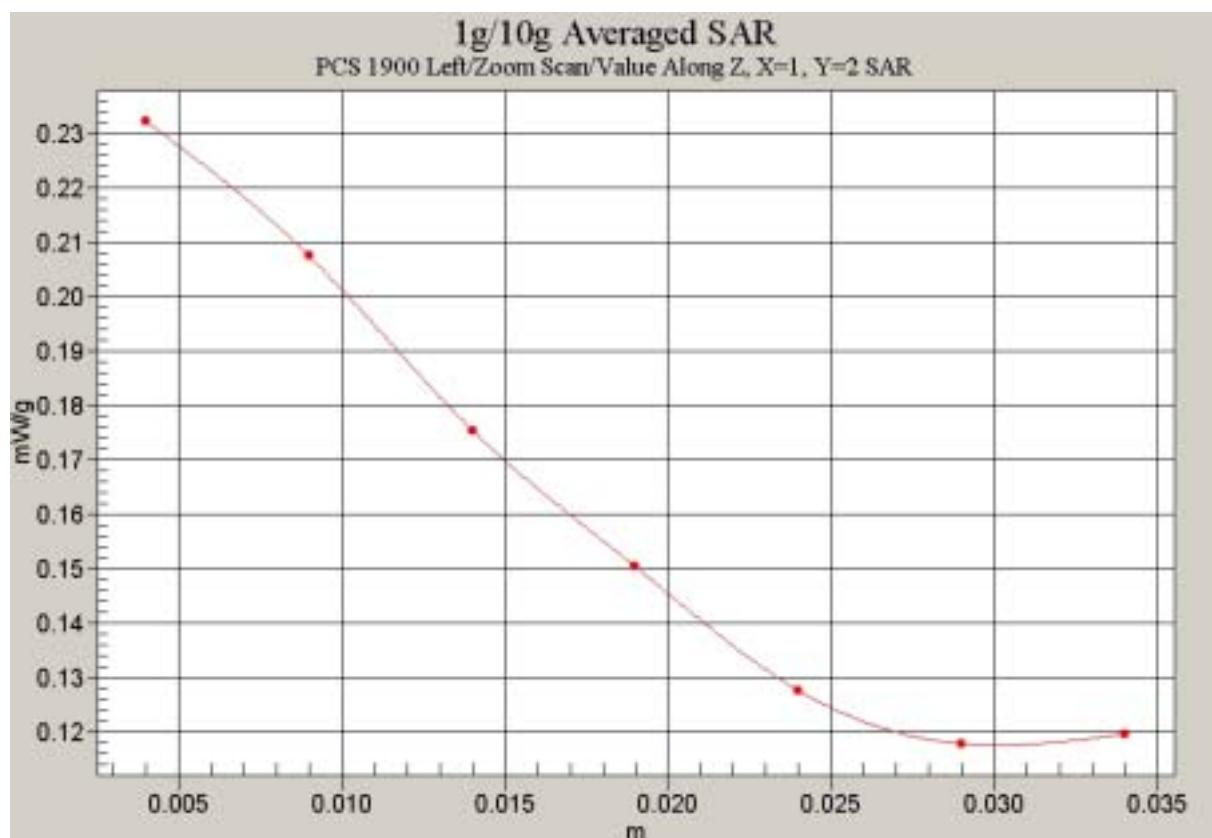

**Fig. 12 Z-Scan at power reference point (left Hand Tilt 15° 1900MHz CH810)**

**PCS 1900 Right Cheek Low**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Cheek Low/Area Scan (51x121x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 8.86 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 1.08 mW/g


**Cheek Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.86 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 1.1 mW/g

Peak SAR (extrapolated) = 1.5 W/kg

**SAR(1 g) = 0.938 mW/g; SAR(10 g) = 0.517 mW/g**

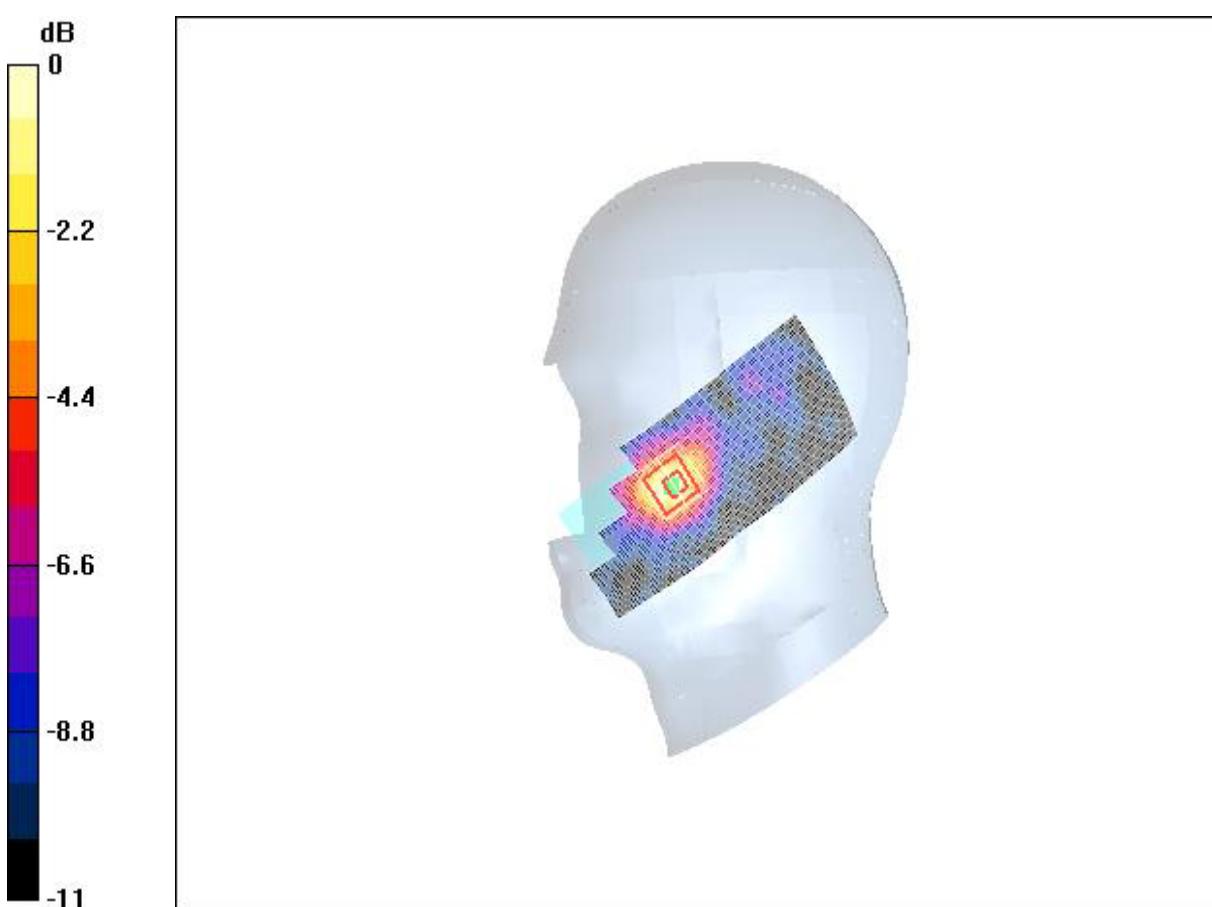

0 dB = 1.1mW/g

**Fig. 13 Right Hand Touch Cheek 1900MHz CH512**

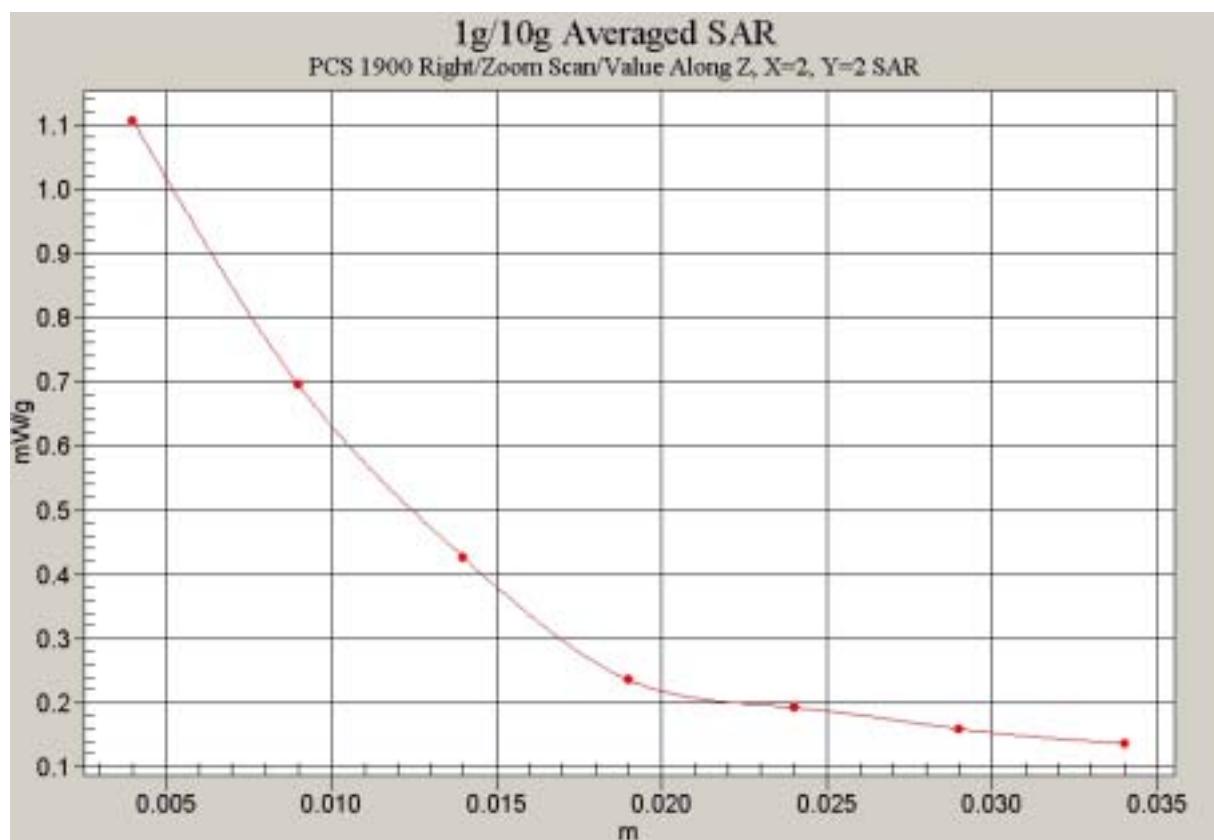


Fig. 14 Z-Scan at power reference point (Right Hand Touch Cheek 1800MHz CH512)

**PCS 1900 Right Cheek Middle**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Cheek Middle/Area Scan (51x121x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 8.3 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.987 mW/g


**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.3 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.964 mW/g

Peak SAR (extrapolated) = 1.39 W/kg

**SAR(1 g) = 0.840 mW/g; SAR(10 g) = 0.448 mW/g**

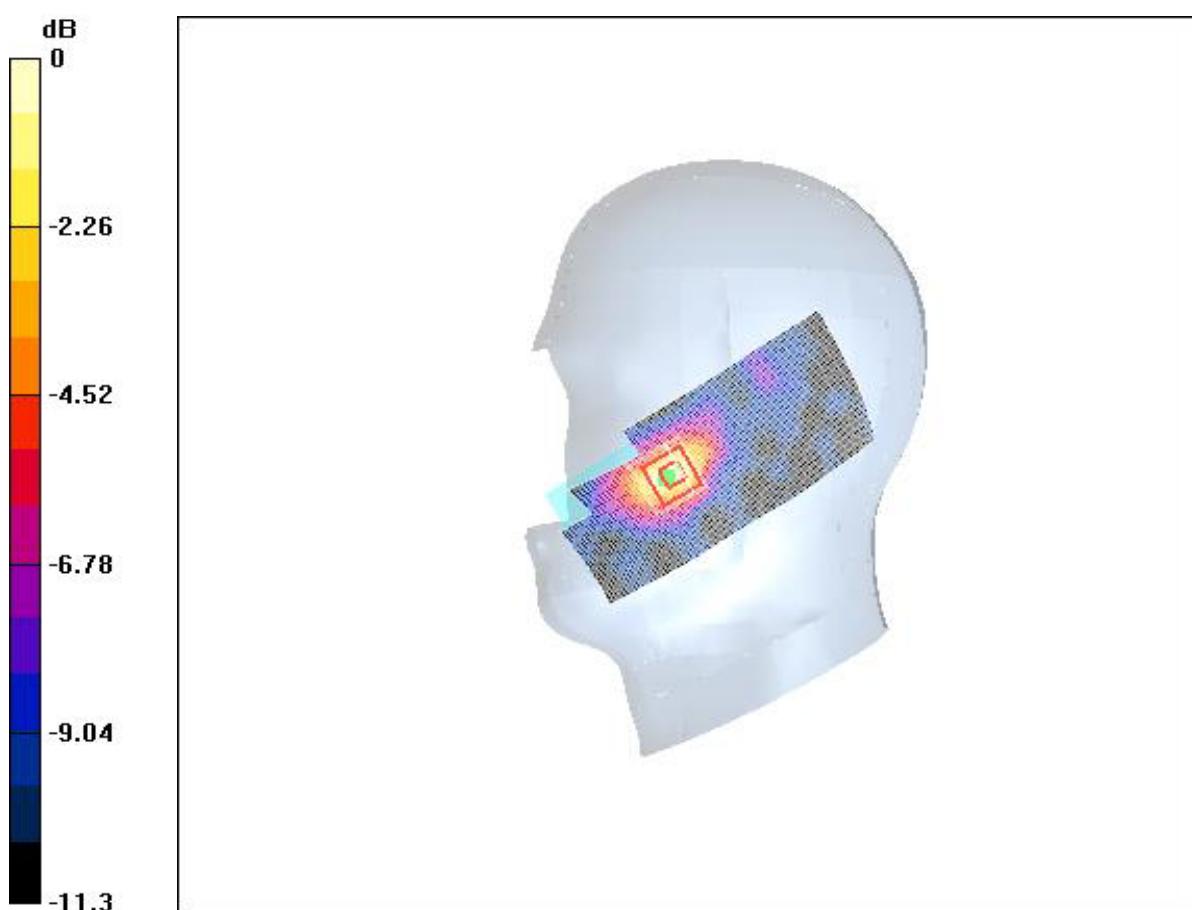

0 dB = 0.964mW/g

**Fig. 15 Right Hand Touch Cheek 1900MHz CH661**

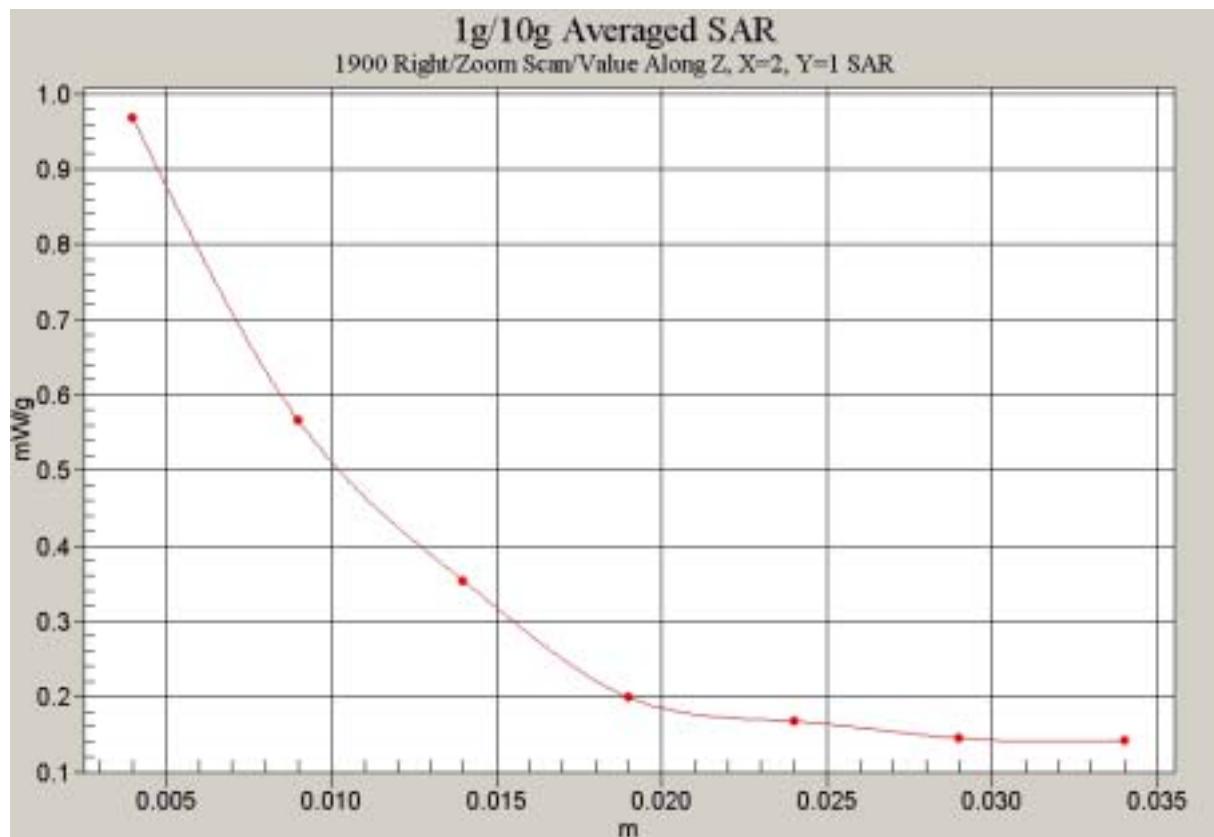


Fig. 16 Z-Scan at power reference point (Right Hand Touch Cheek 1900MHz CH661)

### PCS 1900 Right Cheek High

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Cheek High/Area Scan (51x121x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 8.47 V/m; Power Drift = 0.1 dB

Maximum value of SAR (interpolated) = 0.910 mW/g


**Cheek High//Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.47 V/m; Power Drift = 0.1 dB

Maximum value of SAR (measured) = 0.925 mW/g


Peak SAR (extrapolated) = 1.42 W/kg

**SAR(1 g) = 0.833 mW/g; SAR(10 g) = 0.434 mW/g**

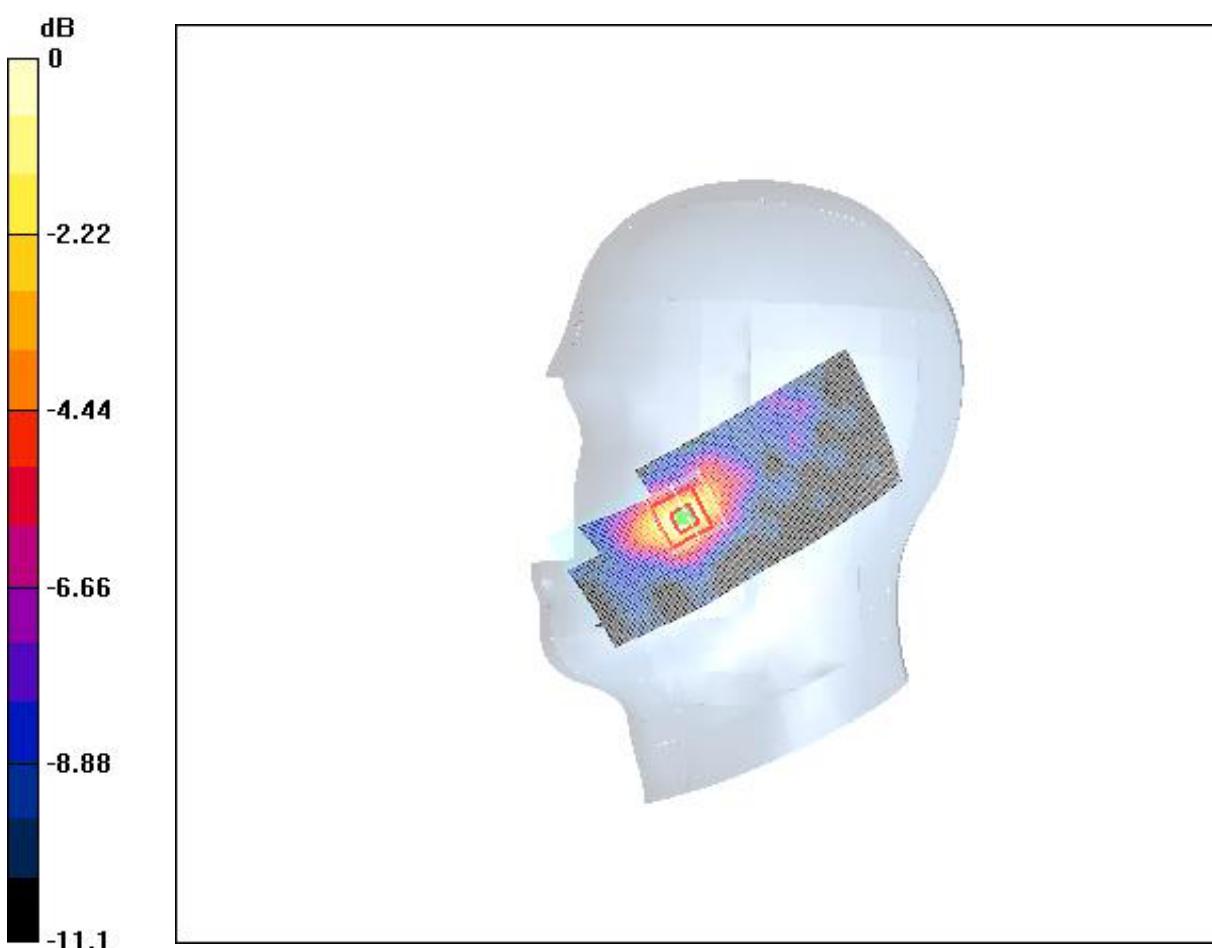

0 dB = 0.925mW/g

**Fig. 17 Right Hand Touch Cheek 1900MHz CH810**

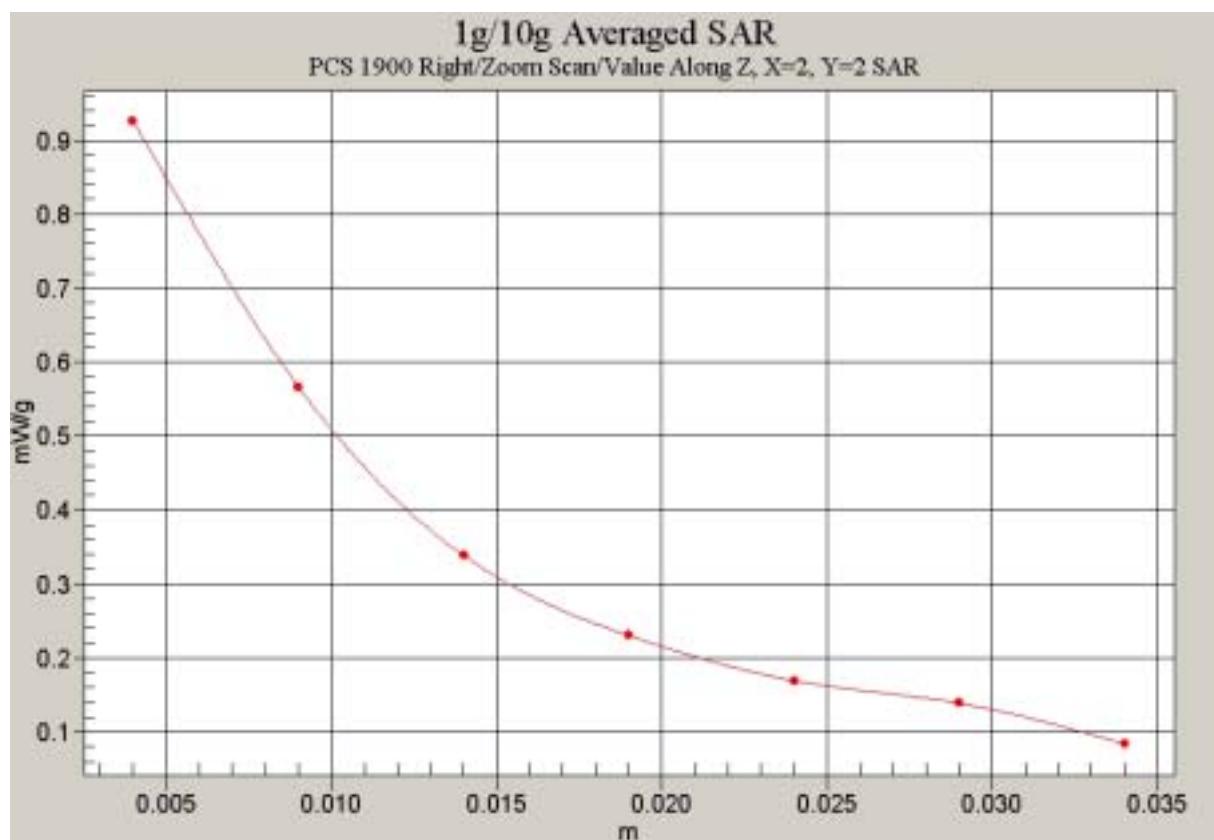

**Fig. 18 Z-Scan at power reference point (Right Hand Touch Cheek 1900MHz CH810)**

**PCS 1900 Right Tilt Low**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Tilt Low/Area Scan (51x121x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 9.53 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.141 mW/g


**Tilt Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.53 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.127 mW/g

Peak SAR (extrapolated) = 0.133 W/kg

**SAR(1 g) = 0.112 mW/g; SAR(10 g) = 0.104 mW/g**

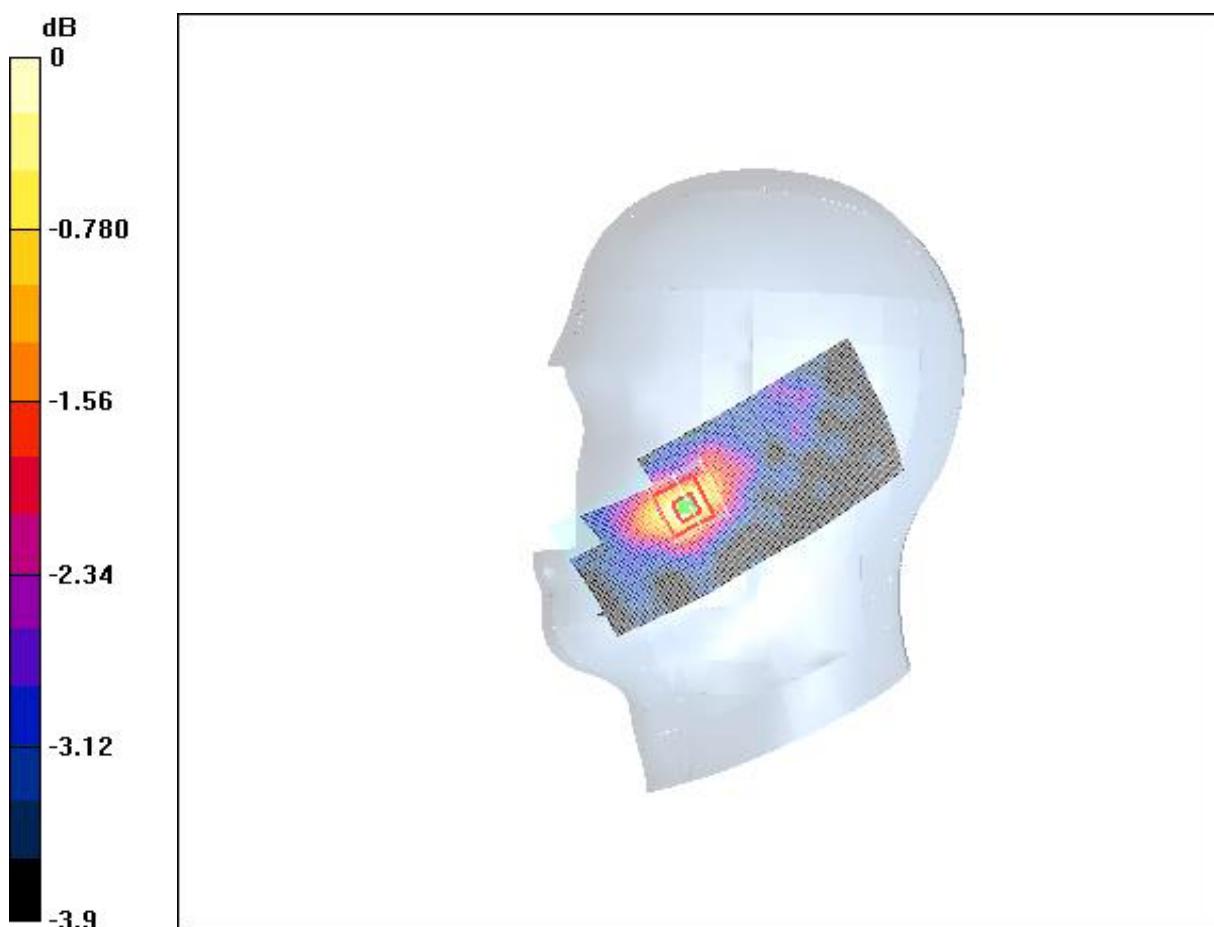

0 dB = 0.127mW/g

**Fig. 19 Right Hand Tilt 15° 1900MHz CH512**

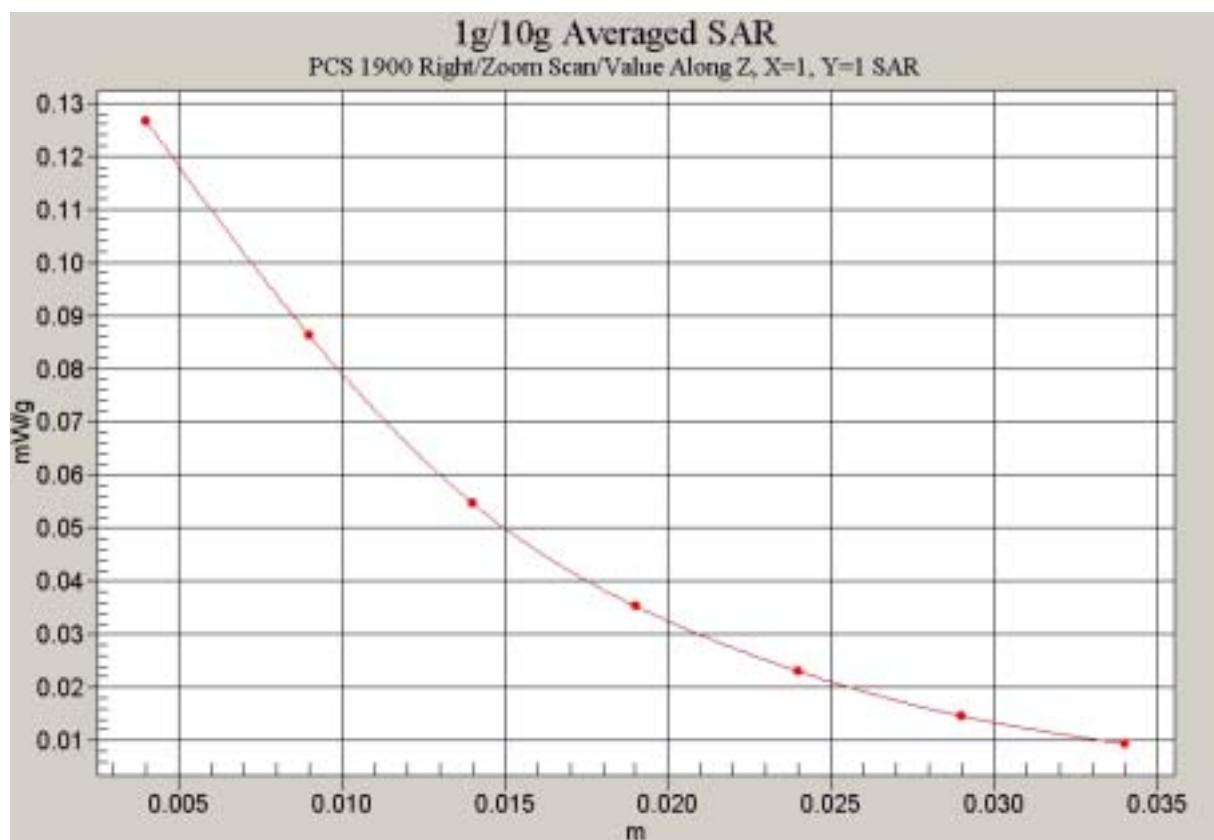


Fig. 20 Z-Scan at power reference point (Right Hand Tilt 15° 1900MHz CH512)

**PCS 1900 Right Tilt Middle**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Tilt Middle/Area Scan (51x121x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 8.21 V/m; Power Drift = -0.0 dB

Maximum value of SAR (interpolated) = 0.187 mW/g


**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.21 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 0.185 mW/g


Peak SAR (extrapolated) = 0.300 W/kg

**SAR(1 g) = 0.171 mW/g; SAR(10 g) = 0.122 mW/g**

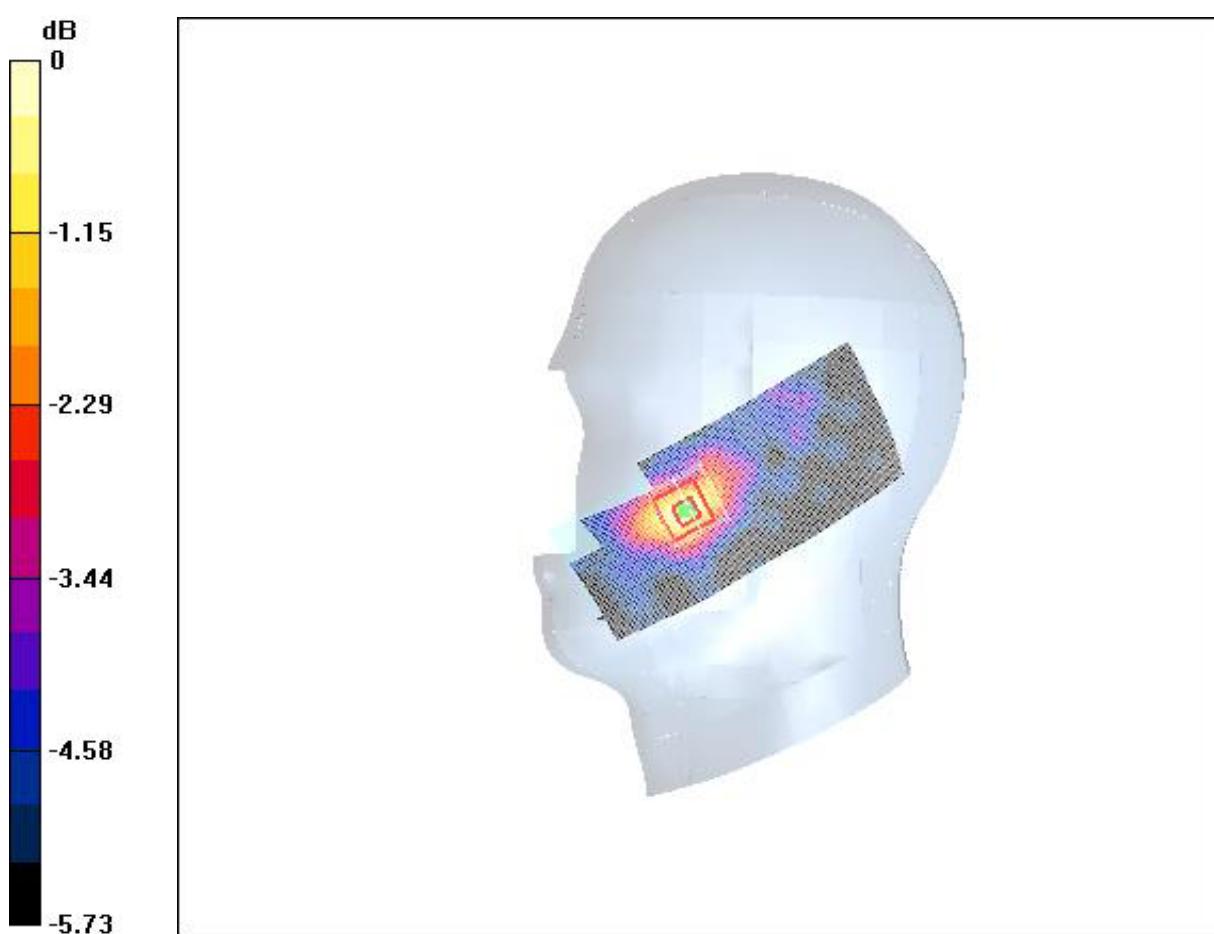

0 dB = 0.185mW/g

**Fig. 21 Right Hand Tilt 15° 1900MHz CH661**

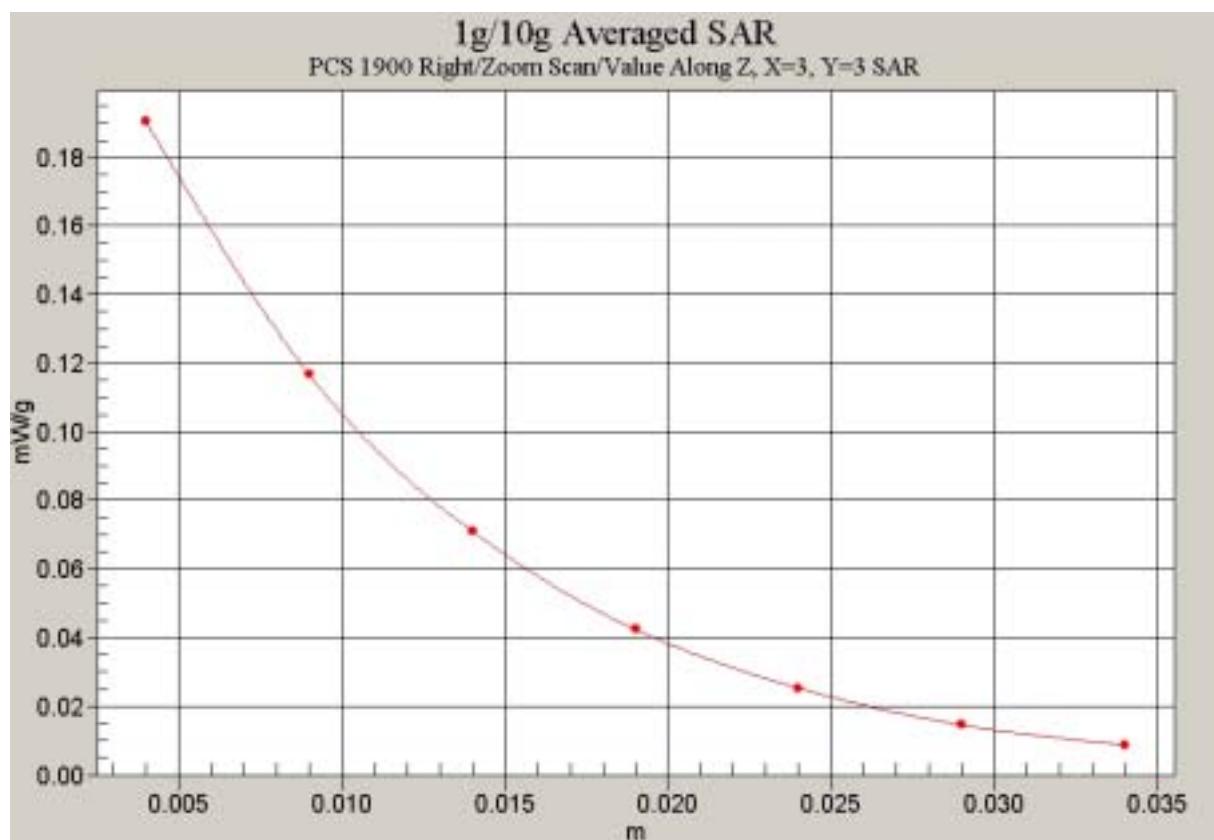

**Fig. 22 Z-Scan at power reference point (Right Hand Tilt 15° 1900MHz CH661)**

**PCS 1900 Right Tilt High**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Tilt High/Area Scan (51x121x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 7.38 V/m; Power Drift = 0.1 dB

Maximum value of SAR (interpolated) = 0.131 mW/g

**Tilt High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.38 V/m; Power Drift = 0.1 dB

Maximum value of SAR (measured) = 0.135 mW/g

Peak SAR (extrapolated) = 0.138 W/kg

**SAR(1 g) = 0.126 mW/g; SAR(10 g) = 0.094 mW/g**



0 dB = 0.135mW/g

**Fig. 23 Right Hand Tilt 15° 1900MHz CH810**

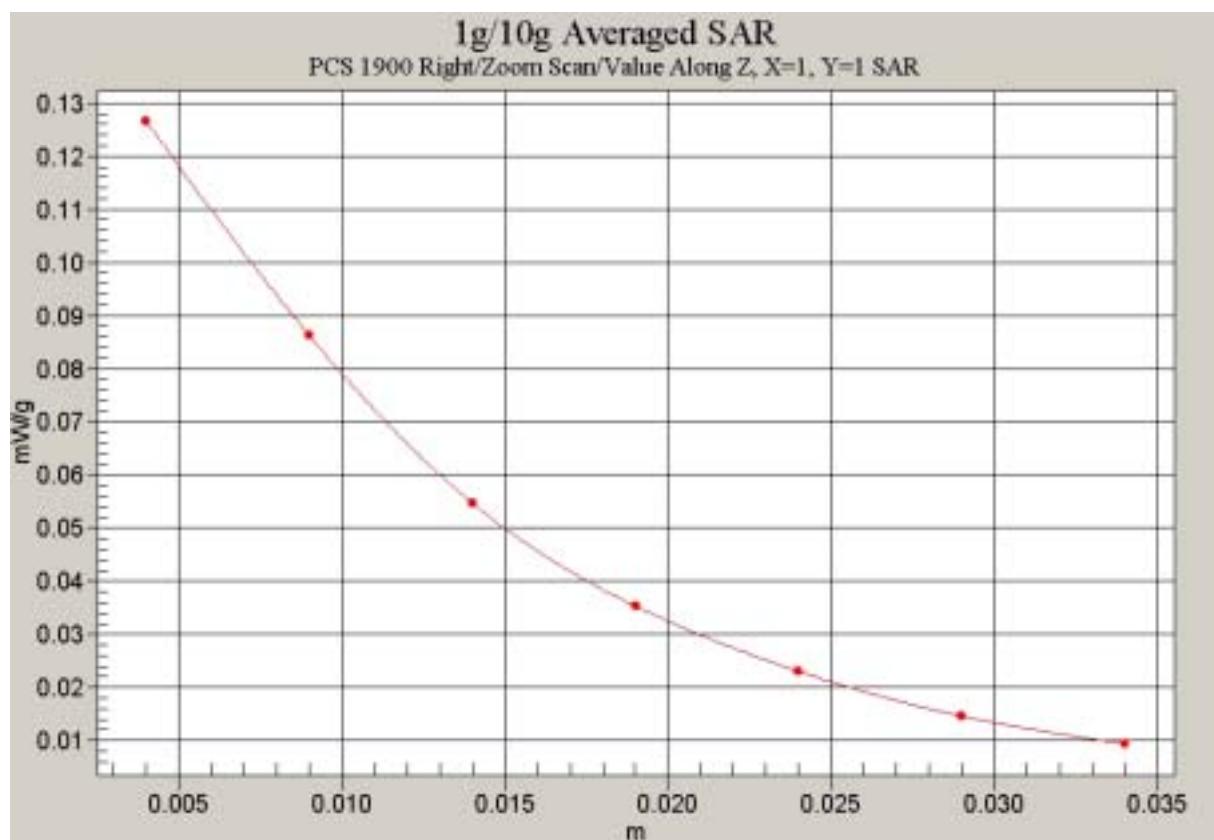


Fig. 24 Z-Scan at power reference point (Right Hand Tilt 15° 1900MHz CH810)

**PCS 1900 Left Cheek Low**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:4

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Cheek Low/Area Scan (41x91x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 12.3 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 1.16 mW/g


**Cheek Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.3 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 1.32 mW/g


Peak SAR (extrapolated) = 1.91 W/kg

**SAR(1 g) = 1.22 mW/g; SAR(10 g) = 0.642 mW/g**

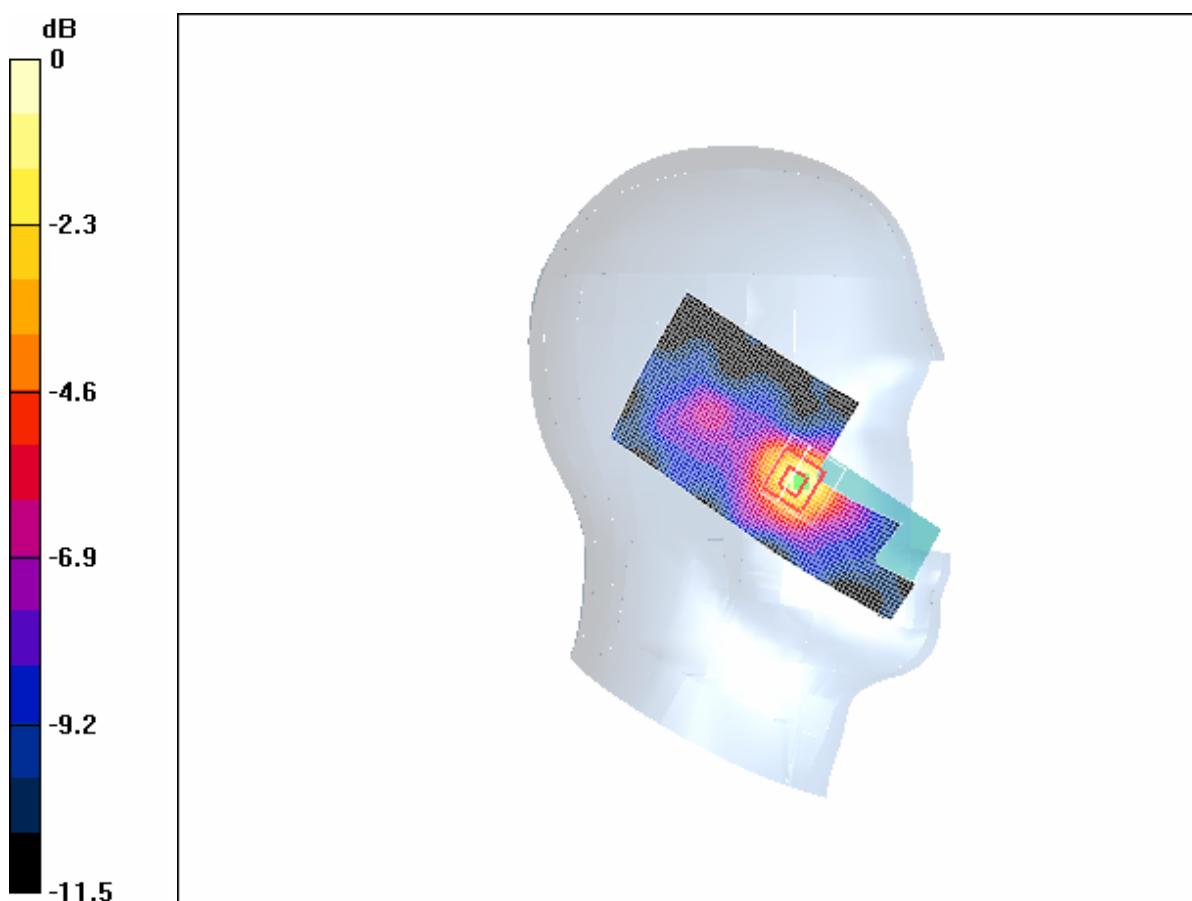

0 dB = 1.32mW/g

**Fig.25 Left Hand Touch Cheek 1900MHz CH512\_GPRS**

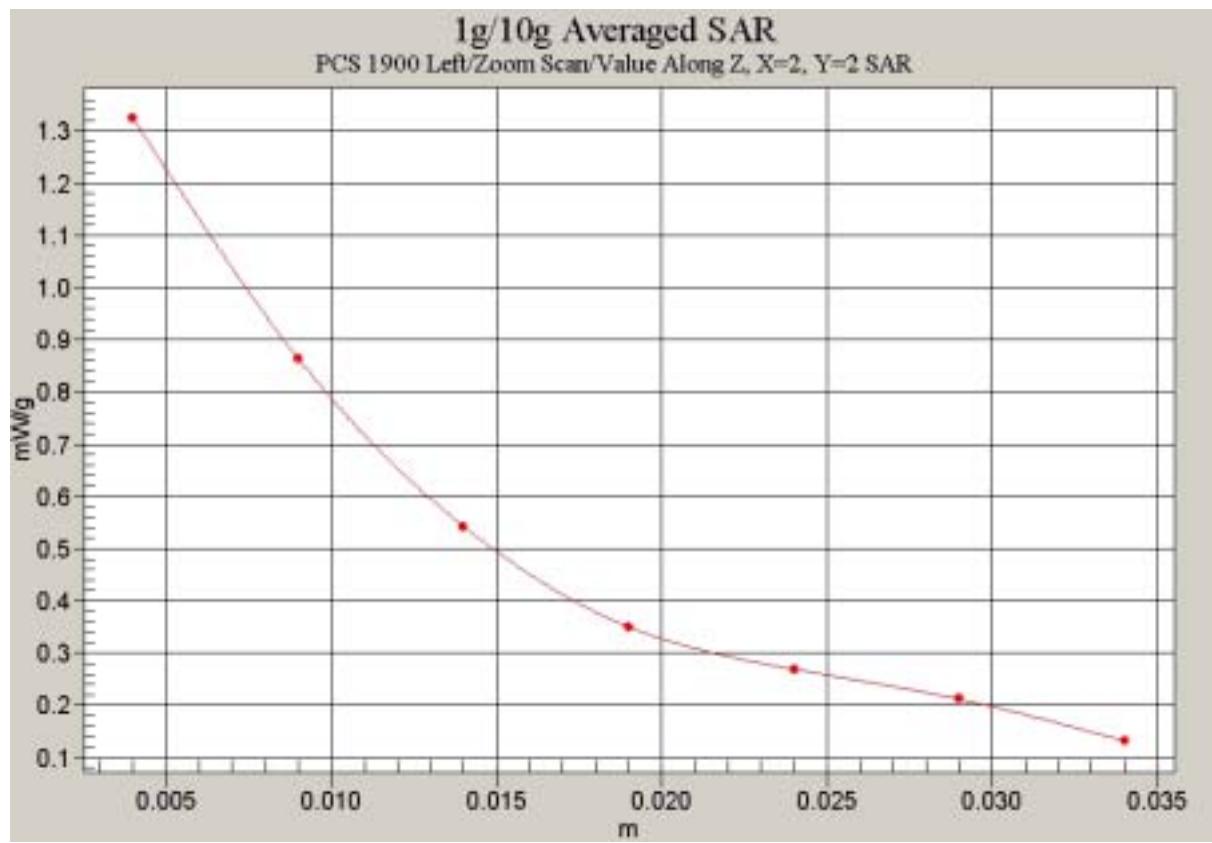

**Fig. 26 Z-Scan at power reference point (Left Hand Touch Cheek 1900MHz CH512) \_GPRS**

### PCS 1900 Left Cheek Middle

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:4

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Cheek Middle/Area Scan (41x91x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 12.2 V/m; Power Drift = -0.007 dB

Maximum value of SAR (interpolated) = 1.13 mW/g


**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.2 V/m; Power Drift = -0.007 dB

Maximum value of SAR (measured) = 1.28 mW/g

Peak SAR (extrapolated) = 1.83 W/kg

**SAR(1 g) = 1.16 mW/g; SAR(10 g) = 0.621 mW/g**

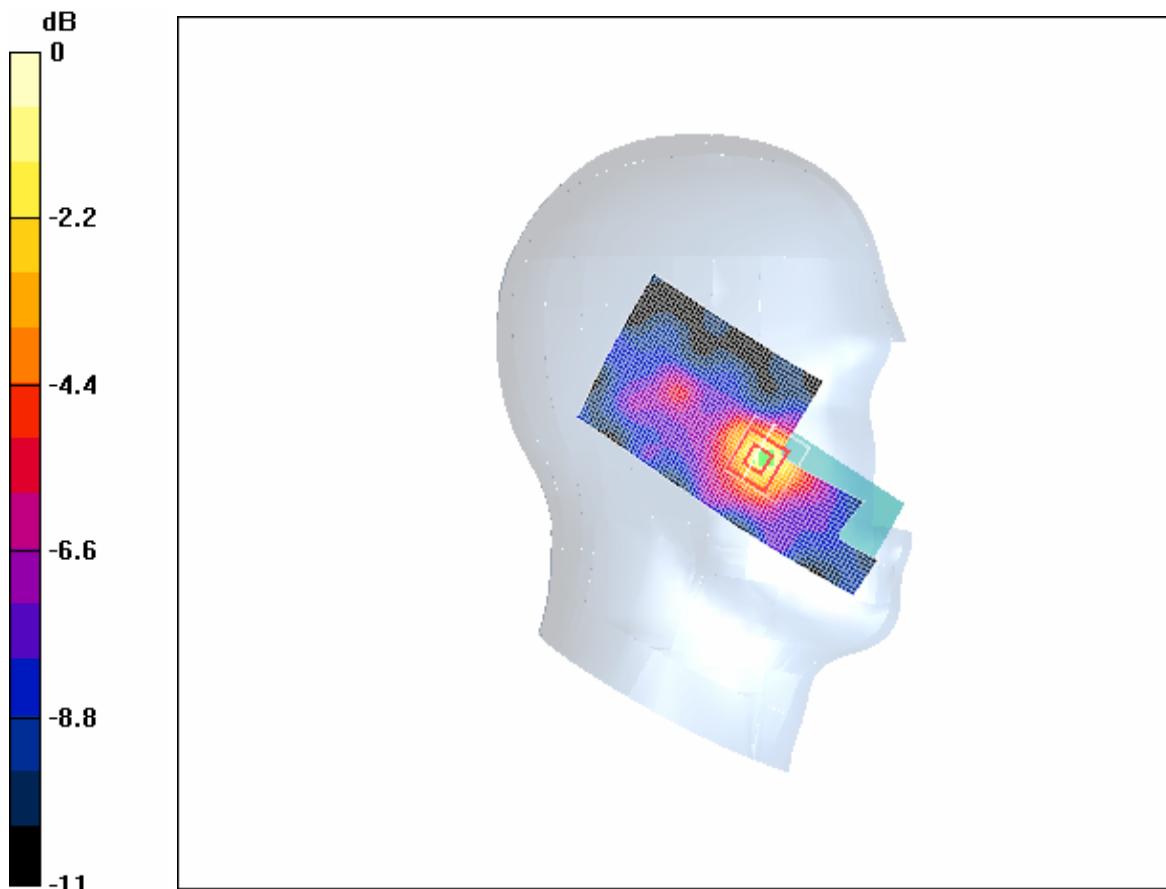

0 dB = 1.28mW/g

Fig.27 Left Hand Touch Cheek 1900MHz CH661\_GPRS

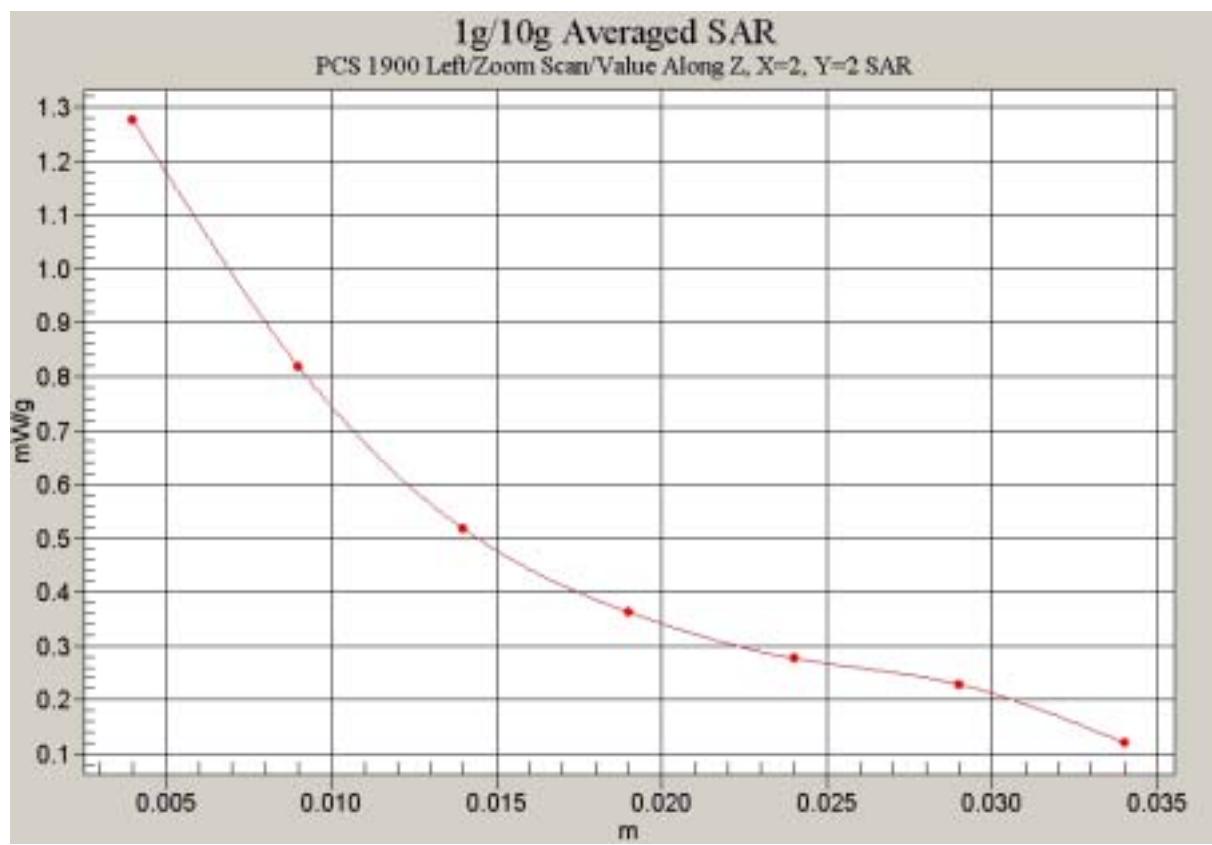


Fig.28 Z-Scan at power reference point (Left Hand Touch Cheek 1900MHz CH661) \_GPRS

**PCS 1900 Left Cheek High**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:4

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Cheek High/Area Scan (41x91x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 12.1 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.992 mW/g


**Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.1 V/m; Power Drift = -0.1 dB


Maximum value of SAR (measured) = 1.16 mW/g

Peak SAR (extrapolated) = 1.64 W/kg

**SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.574 mW/g**

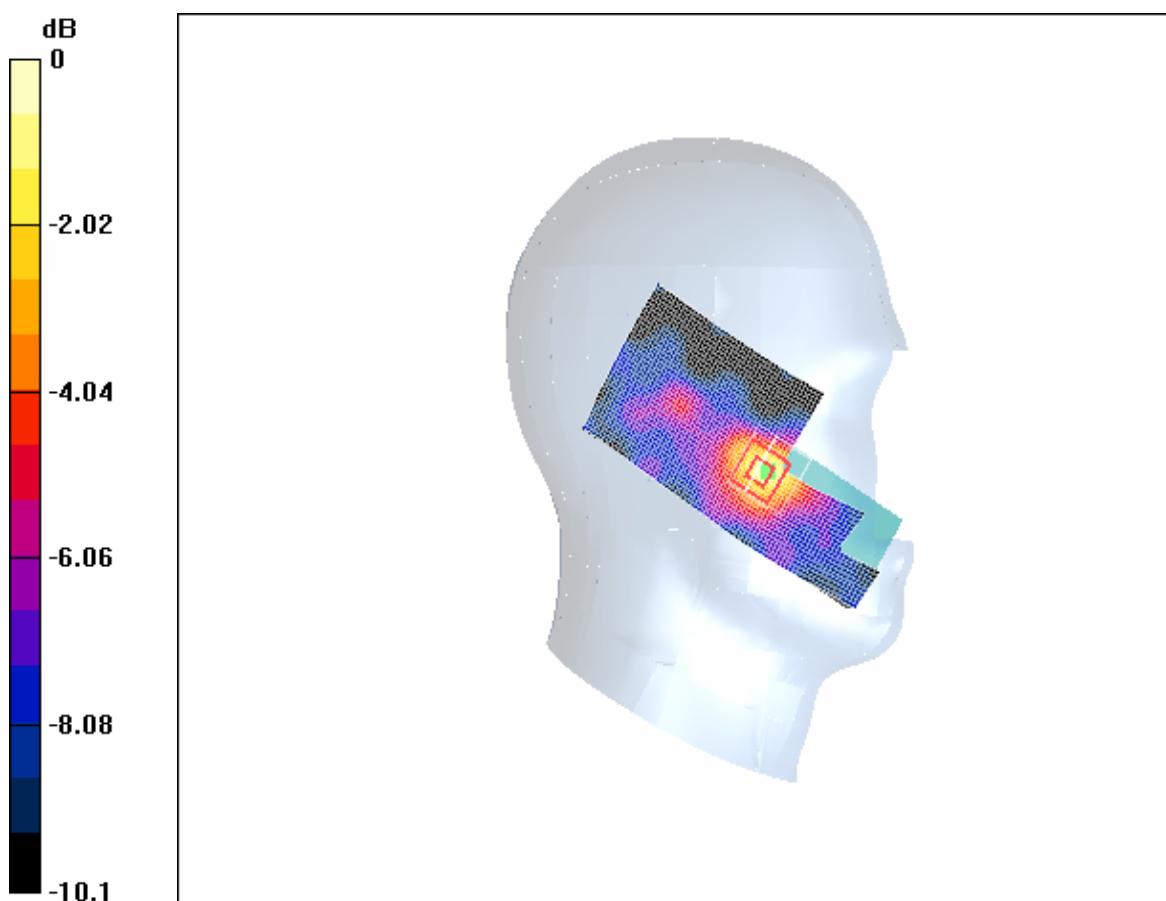

**Fig.29 Left Hand Touch Cheek 1900MHz CH810\_GPRS**

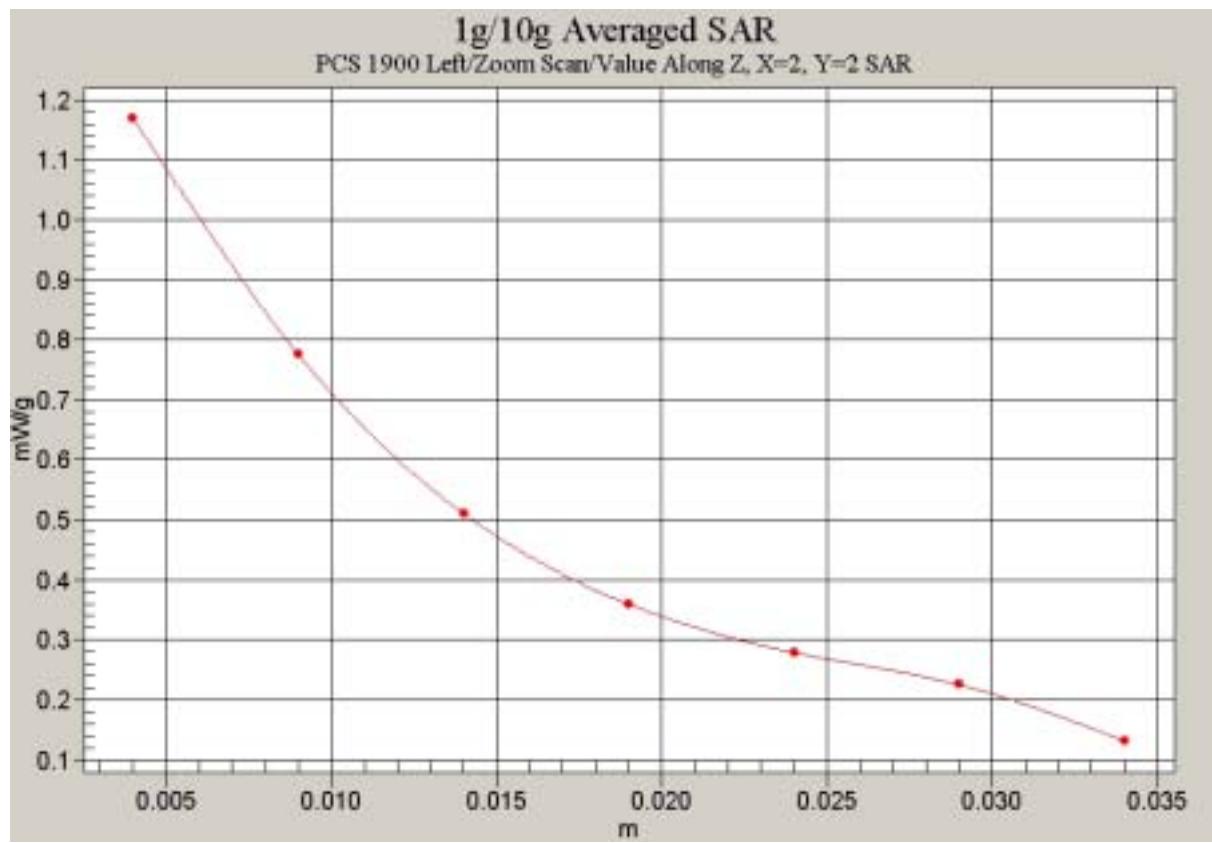

**Fig.30 Z-Scan at power reference point (Left Hand Touch Cheek 1900MHz CH810) \_GPRS**

**PCS 1900 Left Tilt Low**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:4

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Tilt Low/Area Scan (41x91x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 15.1 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.397 mW/g


**Tilt Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.1 V/m; Power Drift = -0.1 dB


Maximum value of SAR (measured) = 0.369 mW/g

Peak SAR (extrapolated) = 0.371 W/kg

**SAR(1 g) = 0.326 mW/g; SAR(10 g) = 0.245 mW/g**

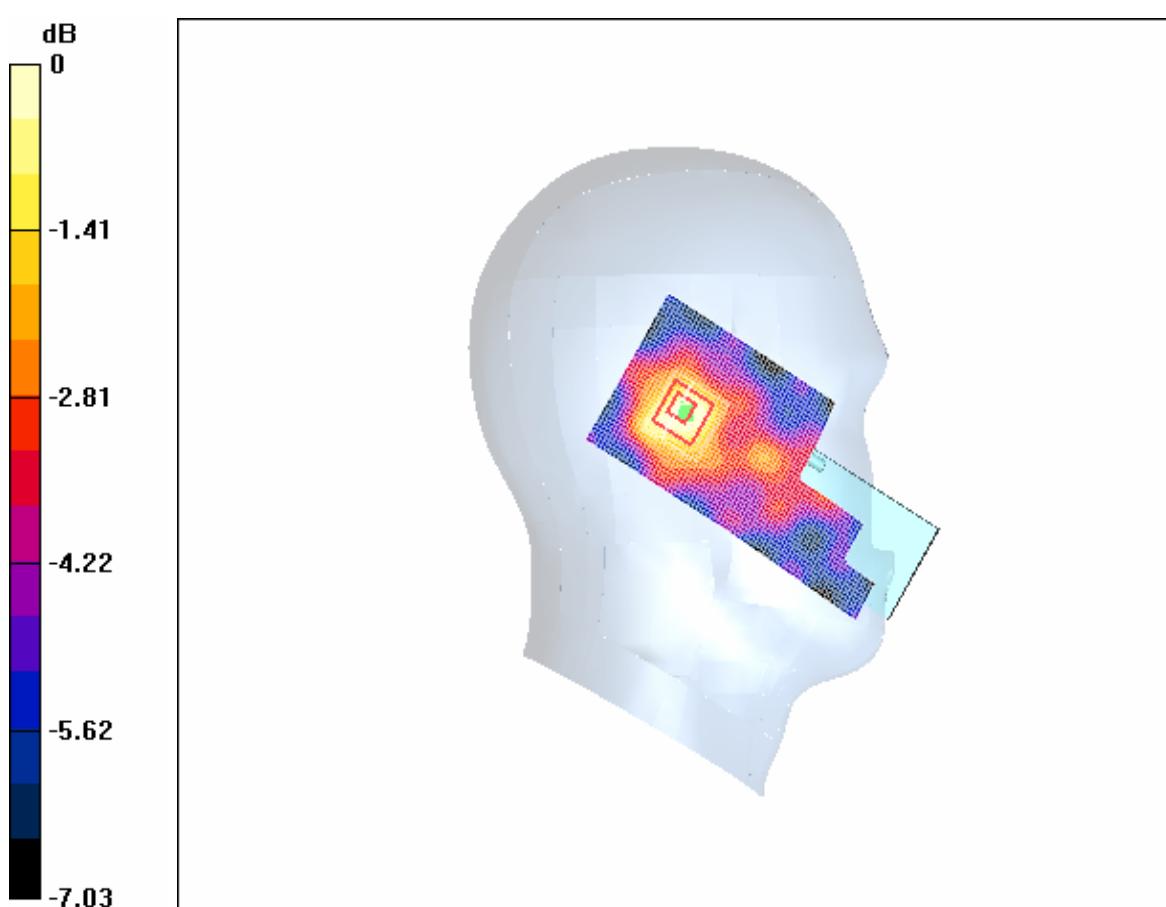

**Fig.31 Left Hand Tilt 15° 1900MHz CH512\_GPRS**

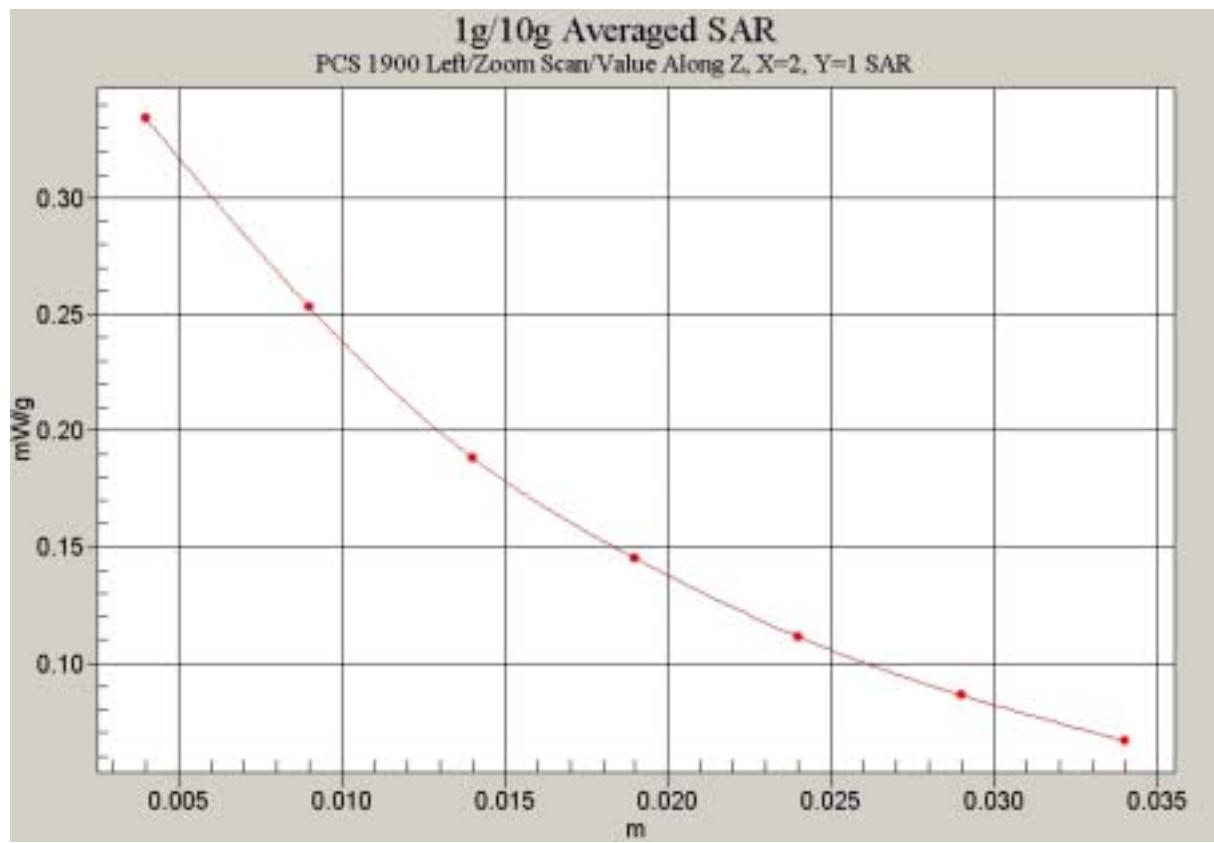

**Fig.32 Z-Scan at power reference point (Left Hand Tilt 15° 1900MHz CH512) \_GPRS**

### PCS 1900 Left Tilt Middle

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:4

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Tilt Middle/Area Scan (41x91x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 14.4 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.365 mW/g


**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.4 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.314 mW/g

Peak SAR (extrapolated) = 0.346 W/kg

**SAR(1 g) = 0.289 mW/g; SAR(10 g) = 0.222 mW/g**

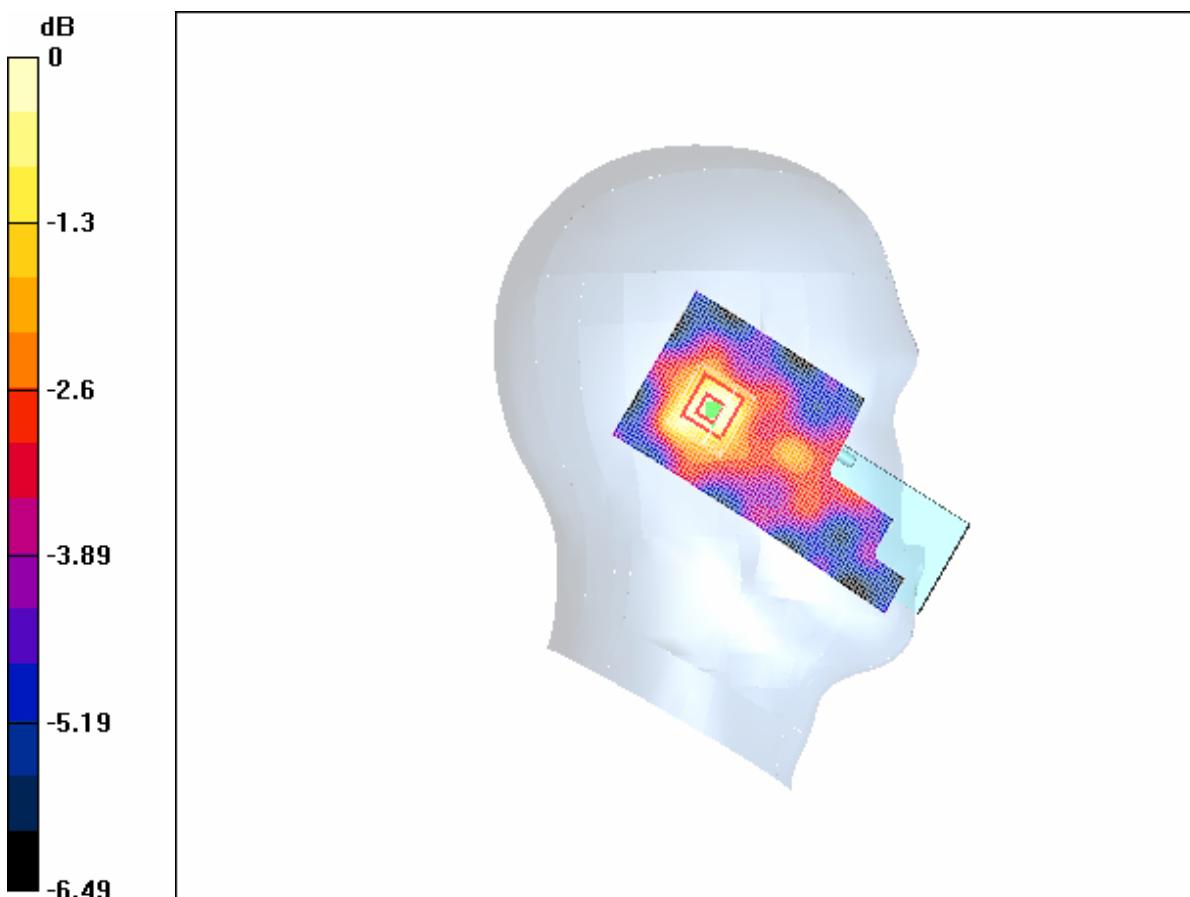

0 dB = 0.314mW/g

Fig.33 Left Hand Tilt 15° 1900MHz CH661\_GPRS

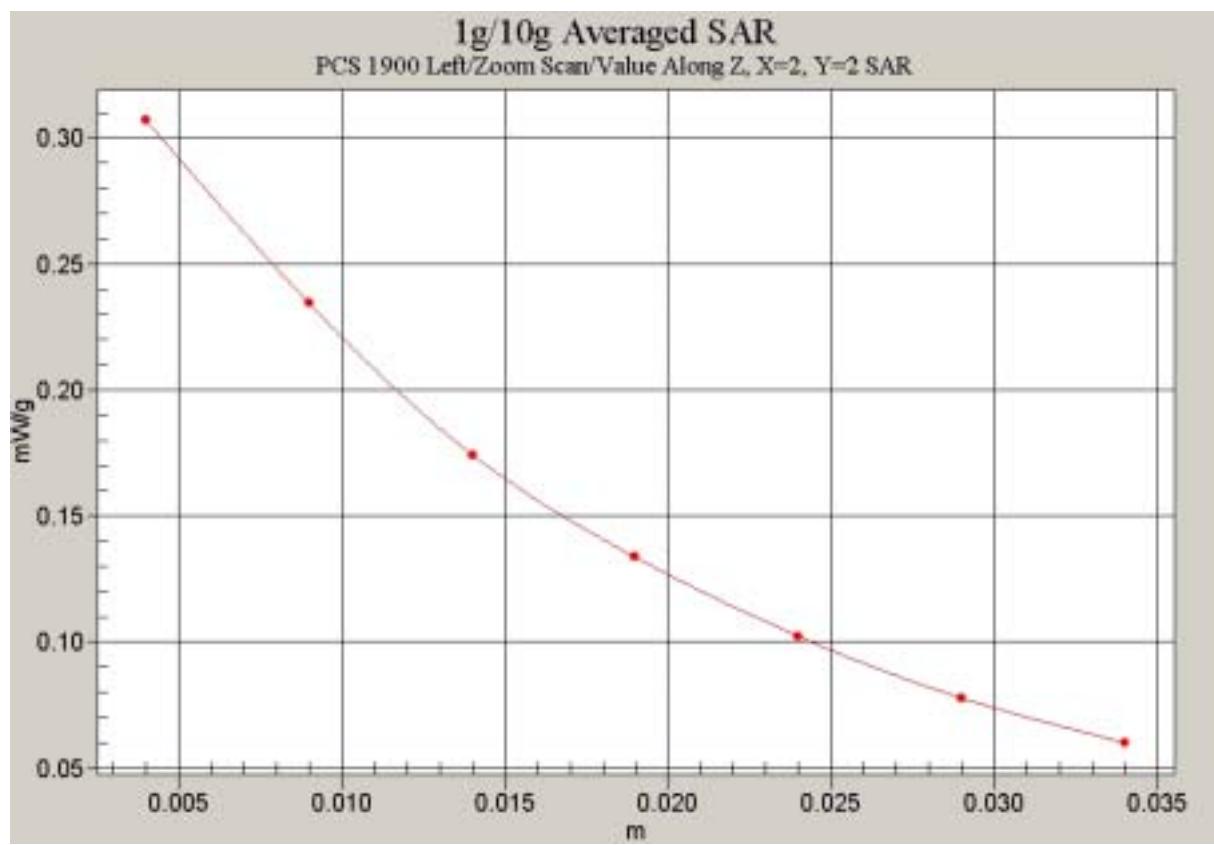


Fig.34 Z-Scan at power reference point (Left Hand Tilt 15° 1900MHz CH661) \_GPRS

### PCS 1900 Left Tilt High

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:4

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Tilt High/Area Scan (41x91x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 13.4 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.320 mW/g


**Tilt High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.4 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.243 mW/g


Peak SAR (extrapolated) = 0.320 W/kg

**SAR(1 g) = 0.235 mW/g; SAR(10 g) = 0.191 mW/g**

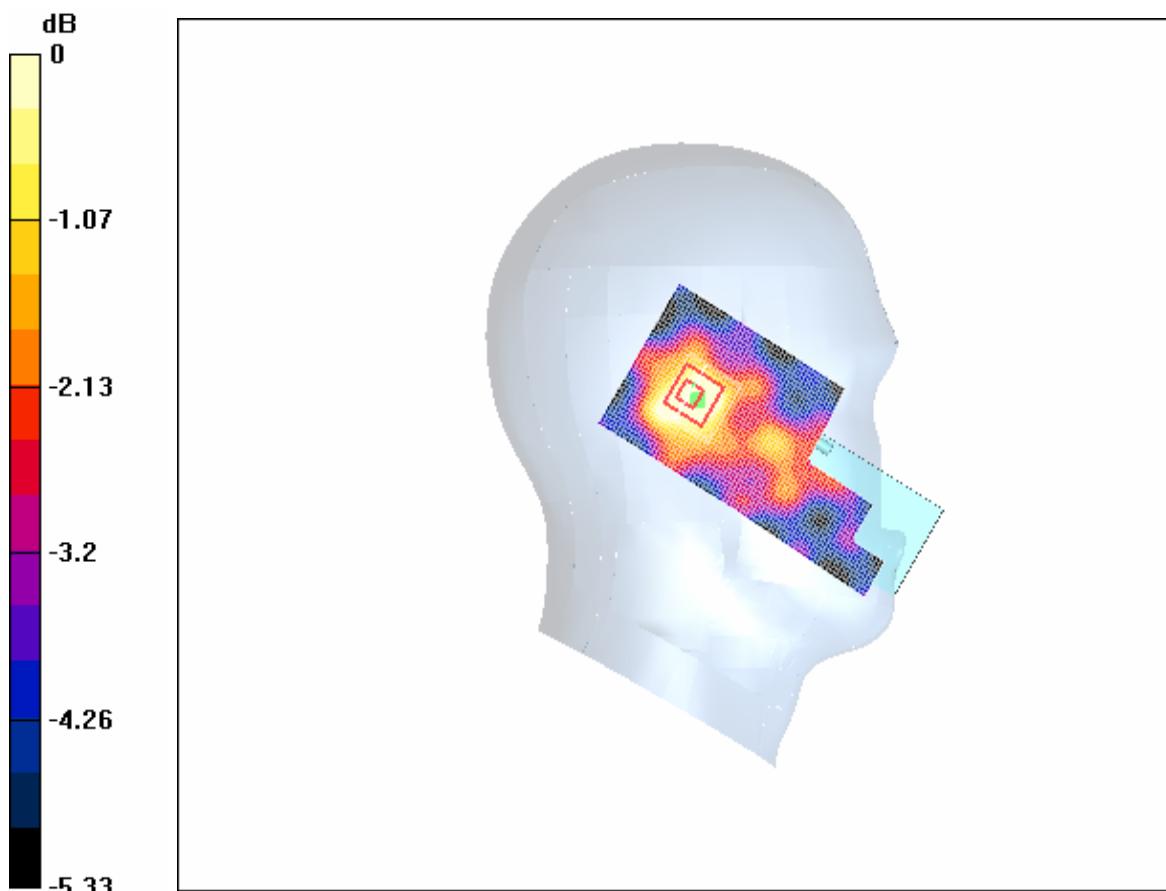

0 dB = 0.243mW/g

Fig.35 Left Hand Tilt 15° 1900MHz CH810\_GPRS

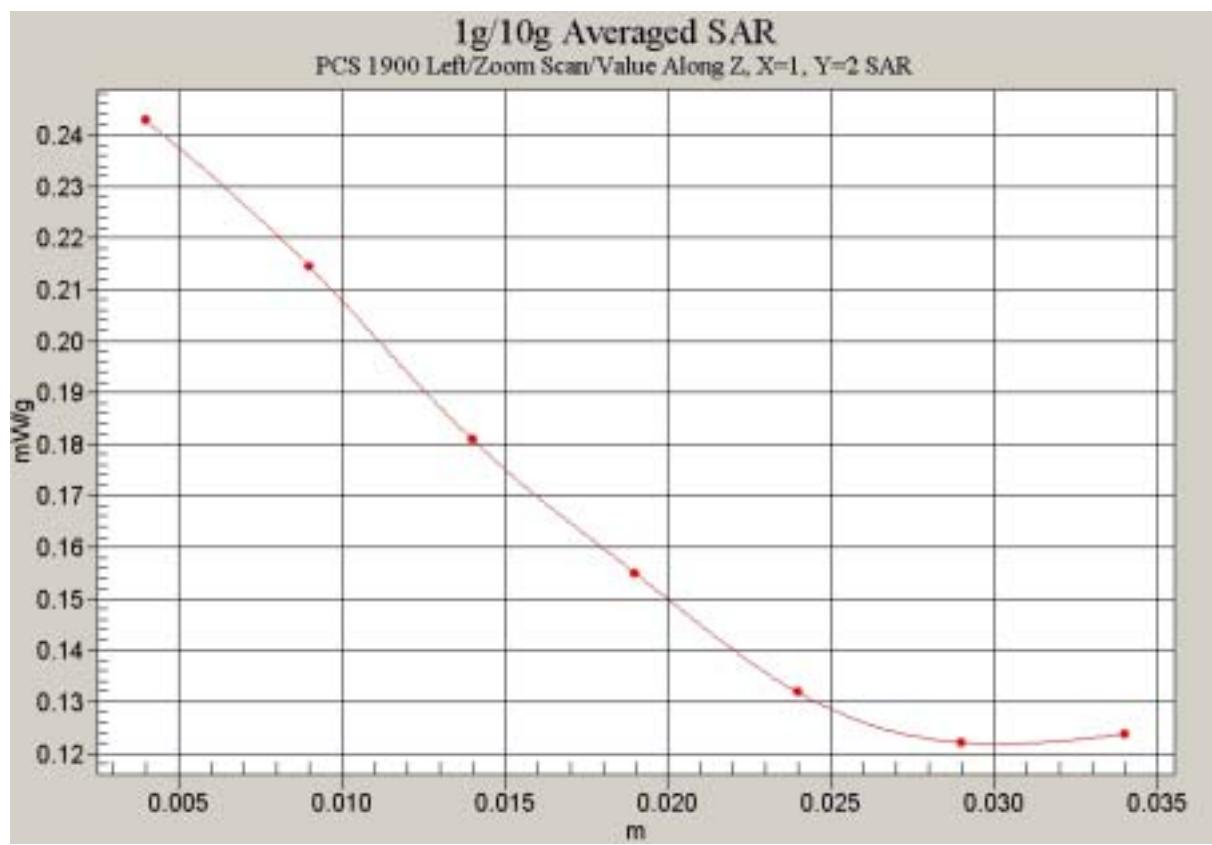

**Fig.36 Z-Scan at power reference point (Left Hand Tilt 15° 1900MHz CH810) \_GPRS**

**PCS 1900 Right Cheek Low**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:4

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Cheek Low/Area Scan (51x121x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 8.95 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 1.27 mW/g


**Cheek Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.95 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 1.3 mW/g

Peak SAR (extrapolated) = 1.95 W/kg

**SAR(1 g) = 1.1 mW/g; SAR(10 g) = 0.578 mW/g**

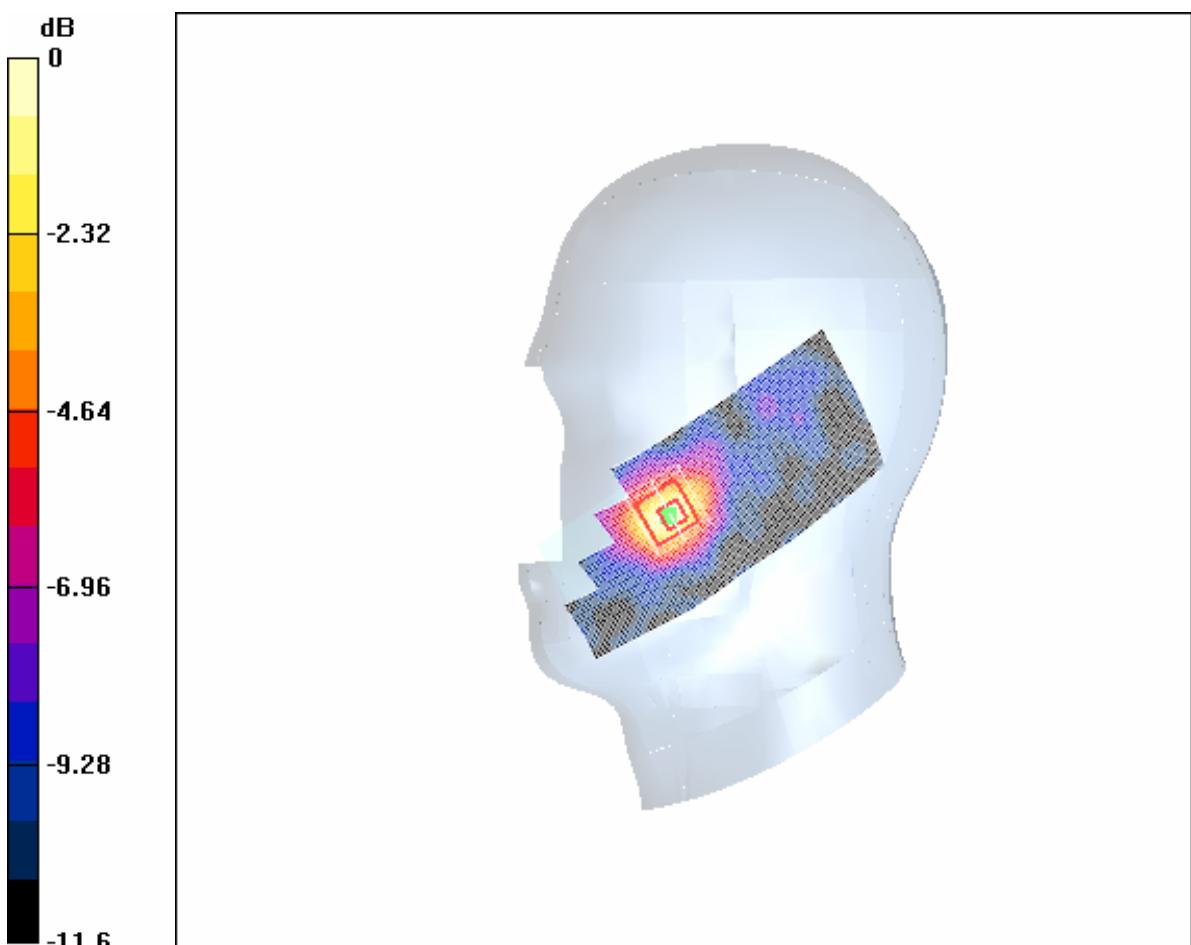

0 dB = 1.3mW/g

Fig.37 Right Hand Touch Cheek 1900MHz CH512\_GPRS

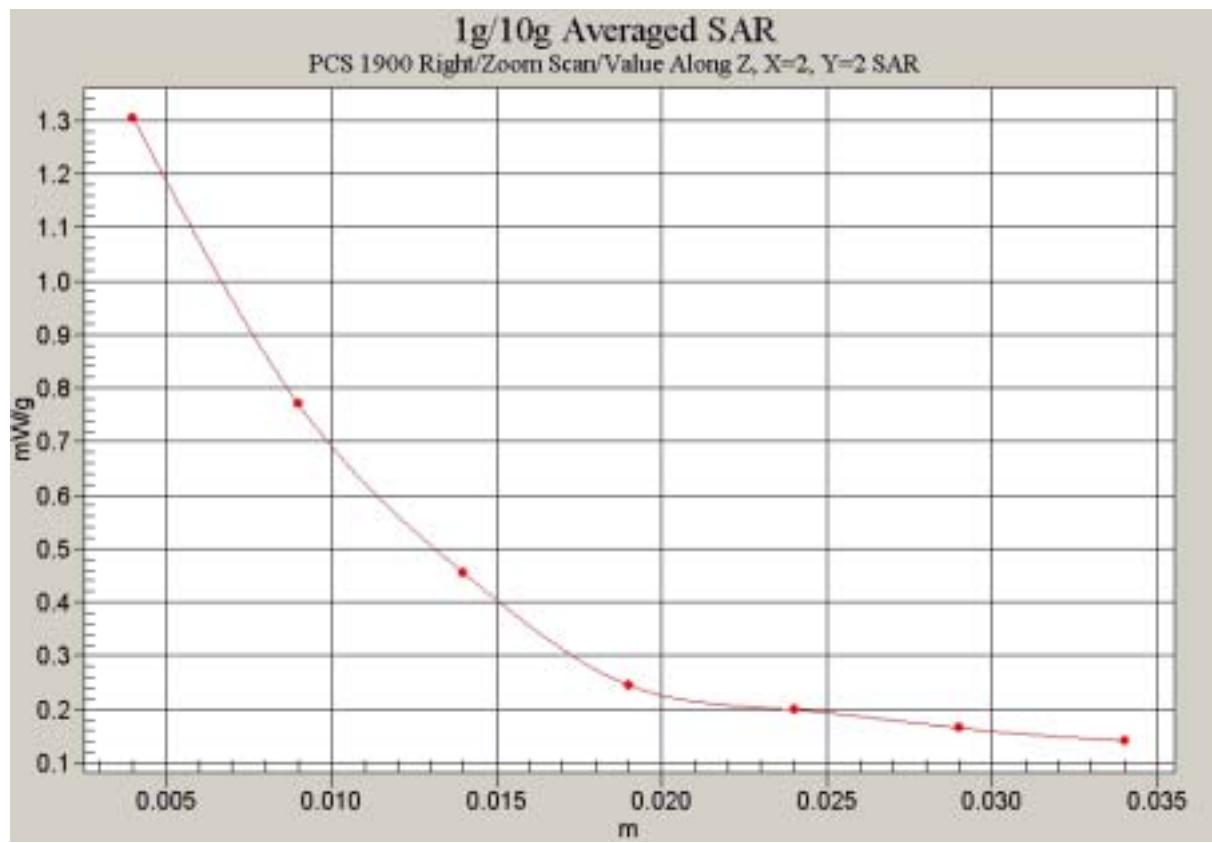


Fig.38 Z-Scan at power reference point (Right Hand Touch Cheek 1900MHz CH512) \_GPRS

### PCS 1900 Right Cheek Middle

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:4

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Cheek Middle/Area Scan (51x121x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 8.38 V/m; Power Drift = -0.1dB

Maximum value of SAR (interpolated) = 1.15 mW/g


**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.38 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 1.13 mW/g


Peak SAR (extrapolated) = 1.78 W/kg

**SAR(1 g) = 0.981 mW/g; SAR(10 g) = 0.497 mW/g**

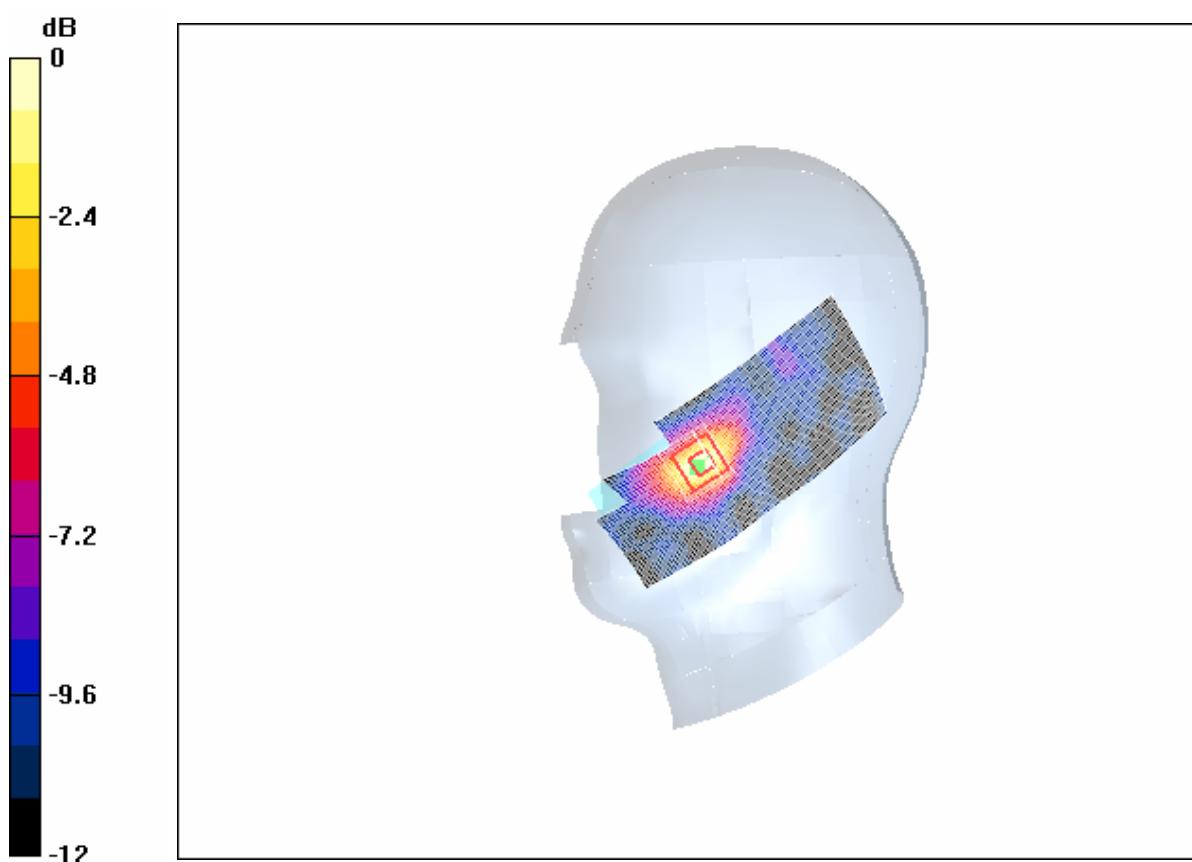

0 dB = 1.13mW/g

Fig.39 Right Hand Touch Cheek 1900MHz CH661\_GPRS

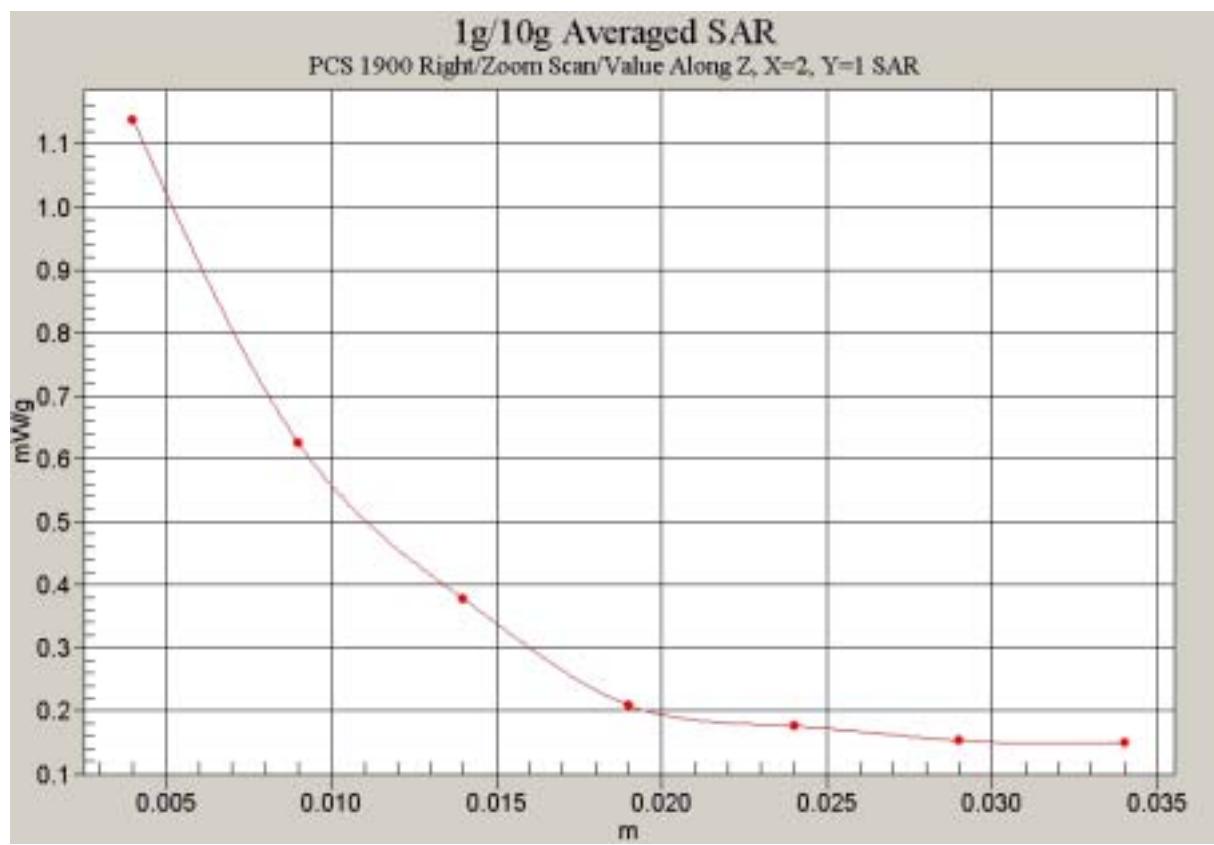

**Fig.40 Z-Scan at power reference point (Right Hand Touch Cheek 1900MHz CH661) \_GPRS**

**PCS 1900 Right Cheek High**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:4

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Cheek High/Area Scan (51x121x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 8.56 V/m; Power Drift = 0.1 dB

Maximum value of SAR (interpolated) = 1.06 mW/g


**Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.56 V/m; Power Drift = 0.1 dB


Maximum value of SAR (measured) = 1.09 mW/g

Peak SAR (extrapolated) = 1.83 W/kg

**SAR(1 g) = 0.971 mW/g; SAR(10 g) = 0.481 mW/g**

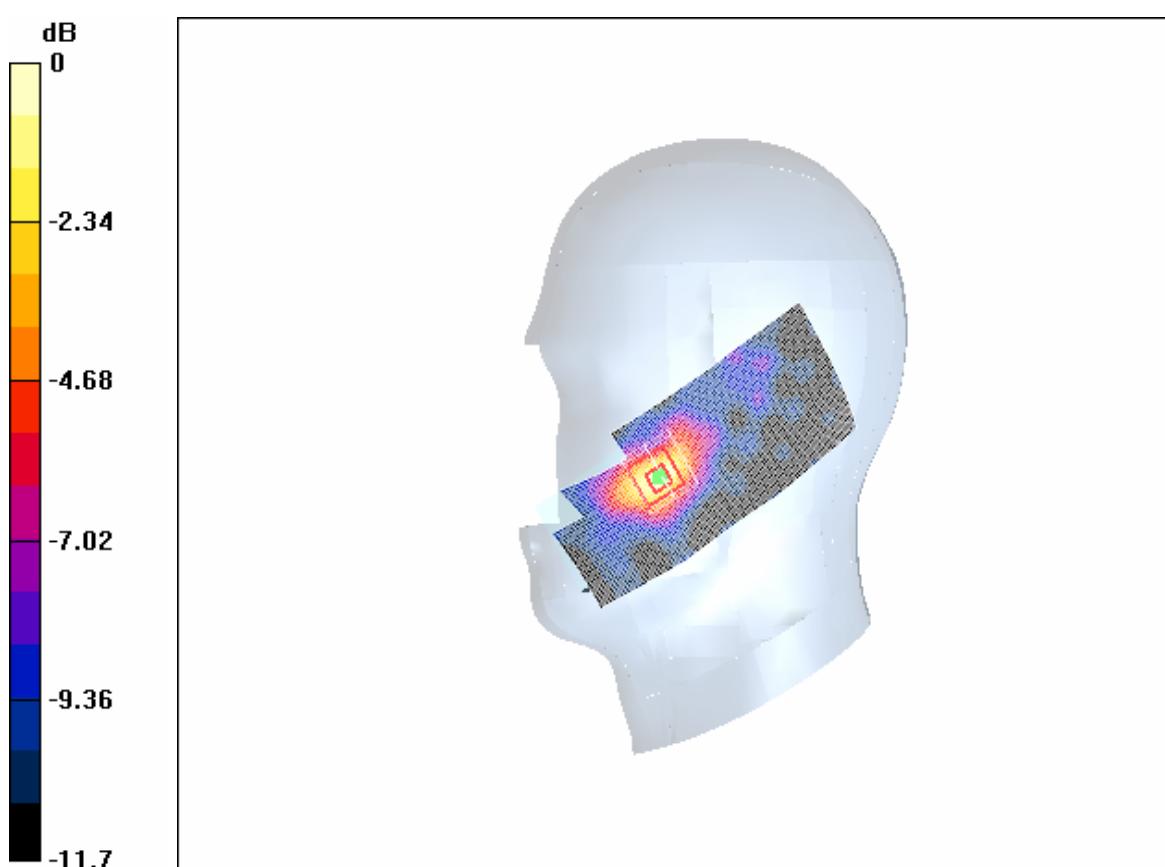

**Fig.41 Right Hand Touch Cheek 1900MHz CH810\_GPRS**

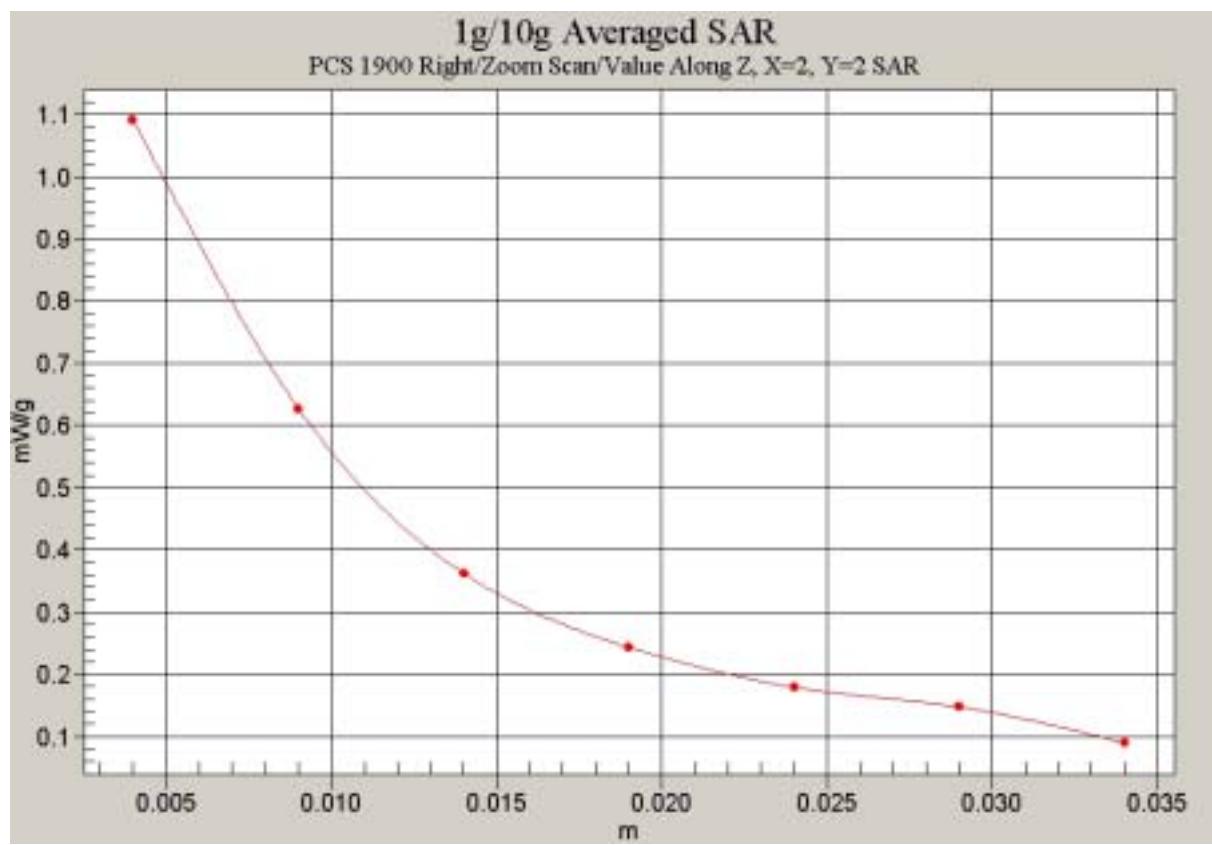

**Fig.42 Z-Scan at power reference point (Right Hand Touch Cheek 1900MHz CH810) \_GPRS**

**PCS 1900 Right Tilt Low**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:4

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Tilt Low/Area Scan (51x121x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 9.63 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.150 mW/g


**Tilt Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.63 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.134 mW/g


Peak SAR (extrapolated) = 0.140 W/kg

**SAR(1 g) = 0.118 mW/g; SAR(10 g) = 0.109 mW/g**

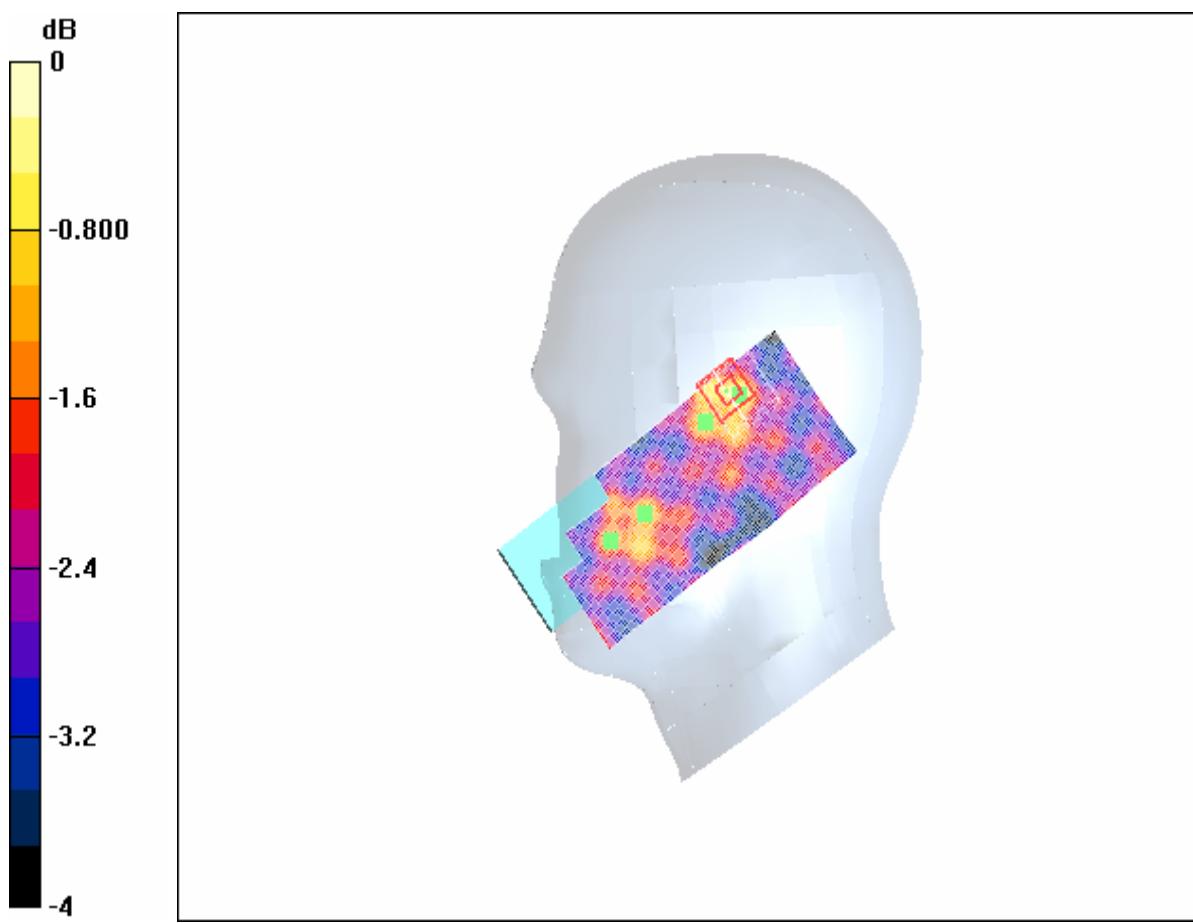

0 dB = 0.134mW/g

**Fig.43 Right Hand Tilt 15° 1900MHz CH512\_GPRS**

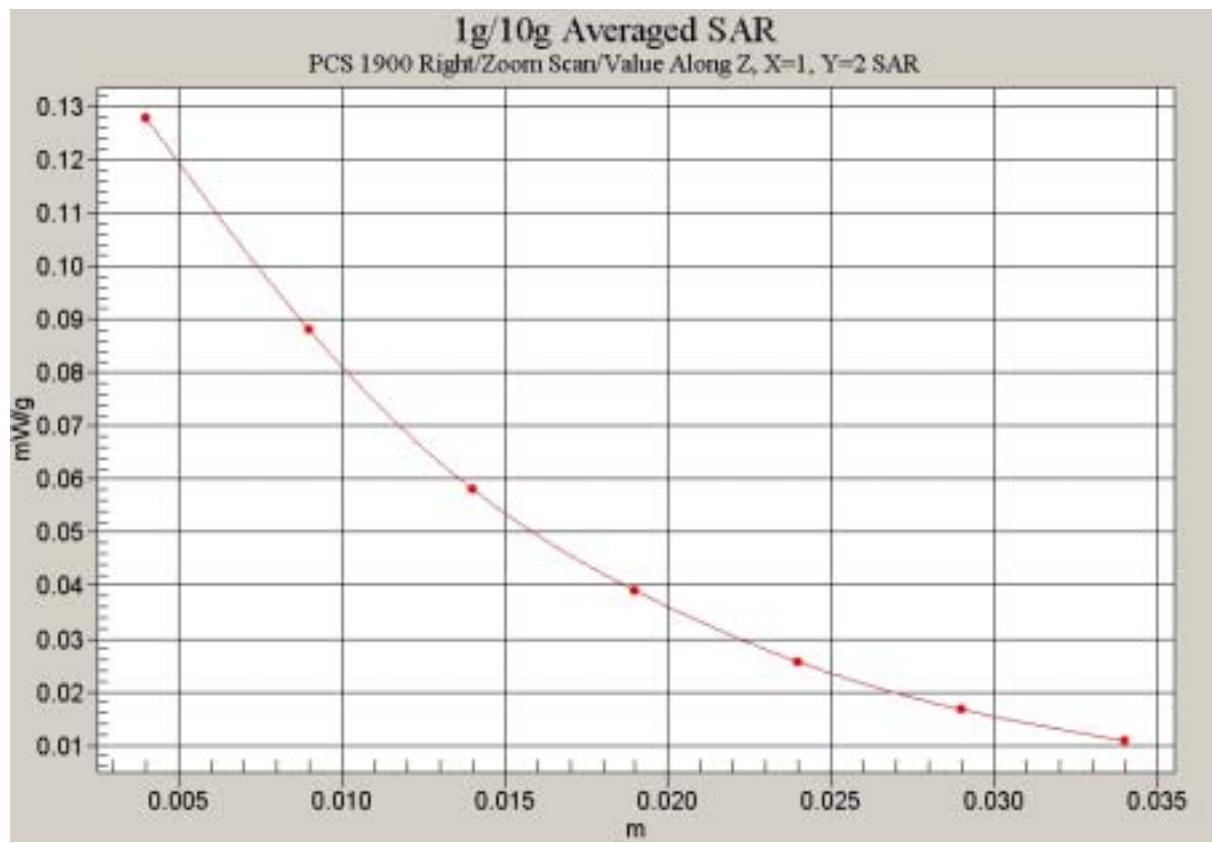

**Fig.44 Z-Scan at power reference point (Right Hand Tilt 15° 1900MHz CH512) \_GPRS**

**PCS 1900 Right Tilt Middle**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:4

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Tilt Middle/Area Scan (51x121x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 8.29 V/m; Power Drift = -0.0 dB

Maximum value of SAR (interpolated) = 0.194 mW/g

**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.29 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 0.191 mW/g

Peak SAR (extrapolated) = 0.316 W/kg

**SAR(1 g) = 0.176 mW/g; SAR(10 g) = 0.125 mW/g**


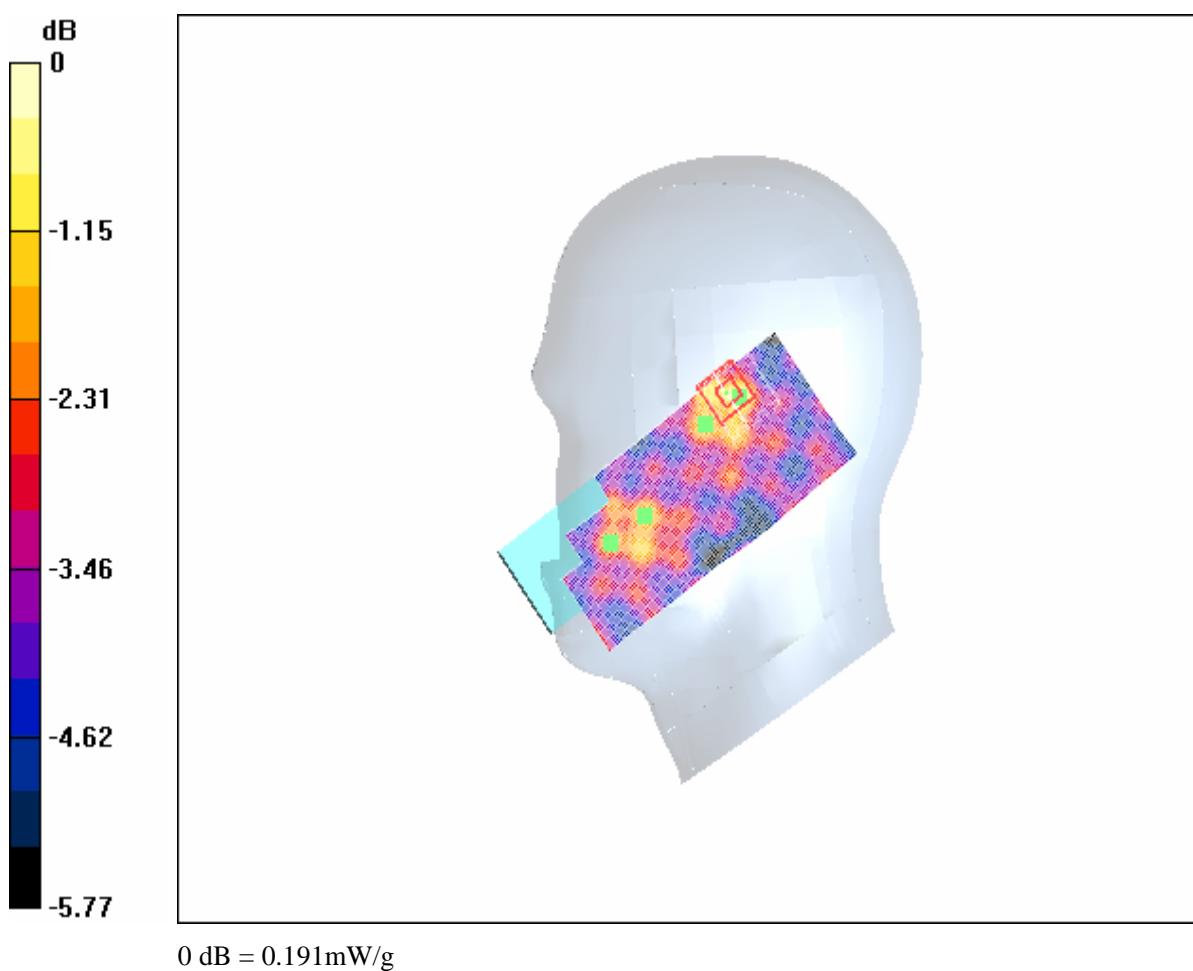


Fig.45 Right Hand Tilt 15° 1900MHz CH661\_GPRS

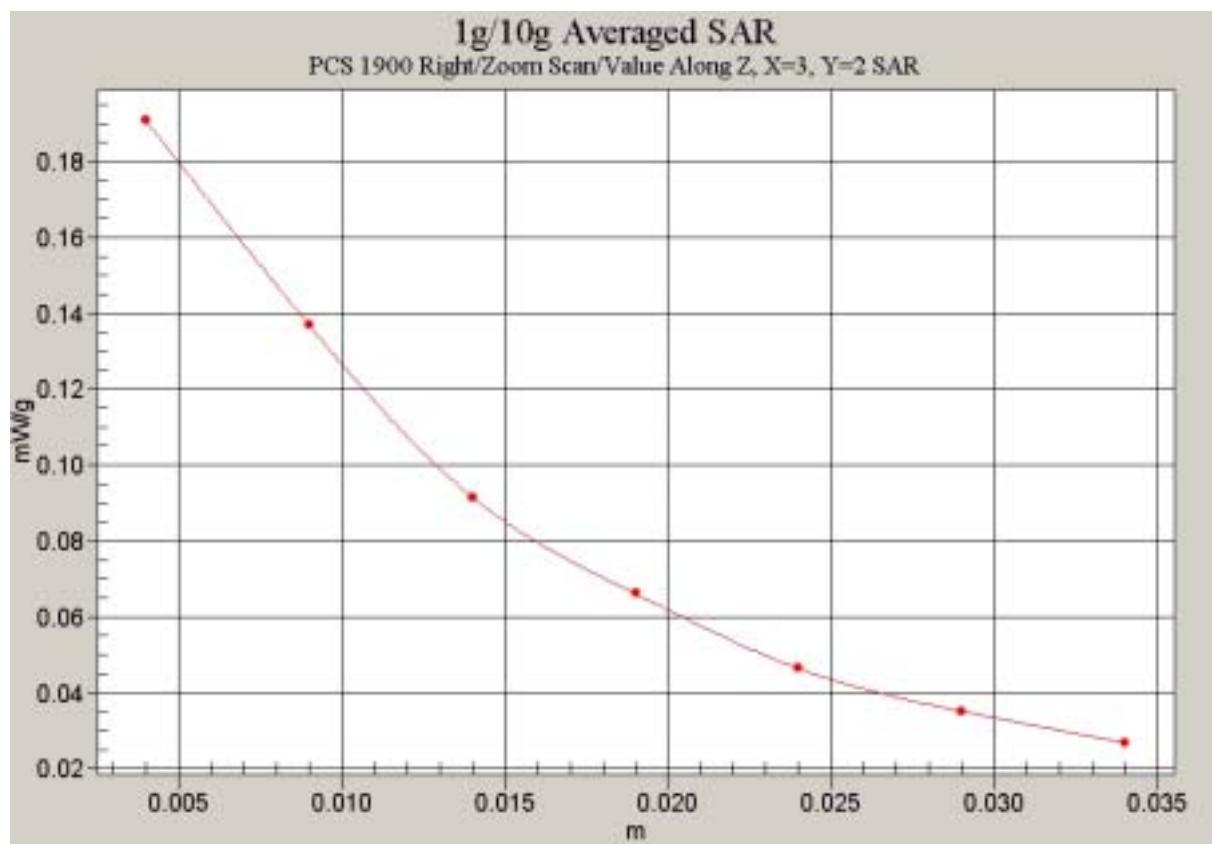

**Fig.46 Z-Scan at power reference point (Right Hand Tilt 15° 1900MHz CH661) \_GPRS**

### PCS 1900 Right Tilt High

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:4

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**Tilt High/Area Scan (51x121x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 7.43 V/m; Power Drift = 0.1 dB

Maximum value of SAR (interpolated) = 0.135 mW/g

**Tilt High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.43 V/m; Power Drift = 0.1 dB

Maximum value of SAR (measured) = 0.138 mW/g

Peak SAR (extrapolated) = 0.141 W/kg

**SAR(1 g) = 0.129 mW/g; SAR(10 g) = 0.097 mW/g**


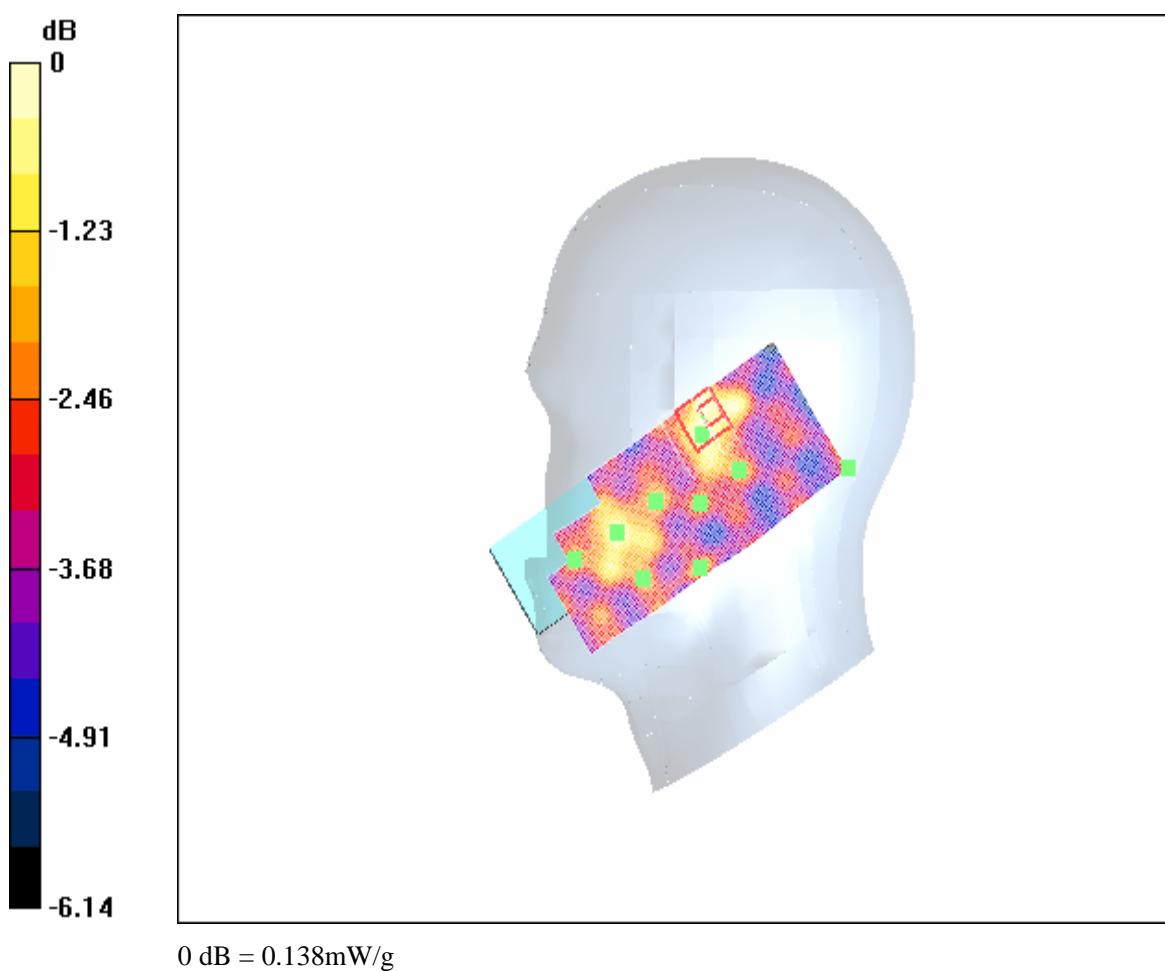


Fig.47 Right Hand Tilt 15° 1900MHz CH810\_GPRS

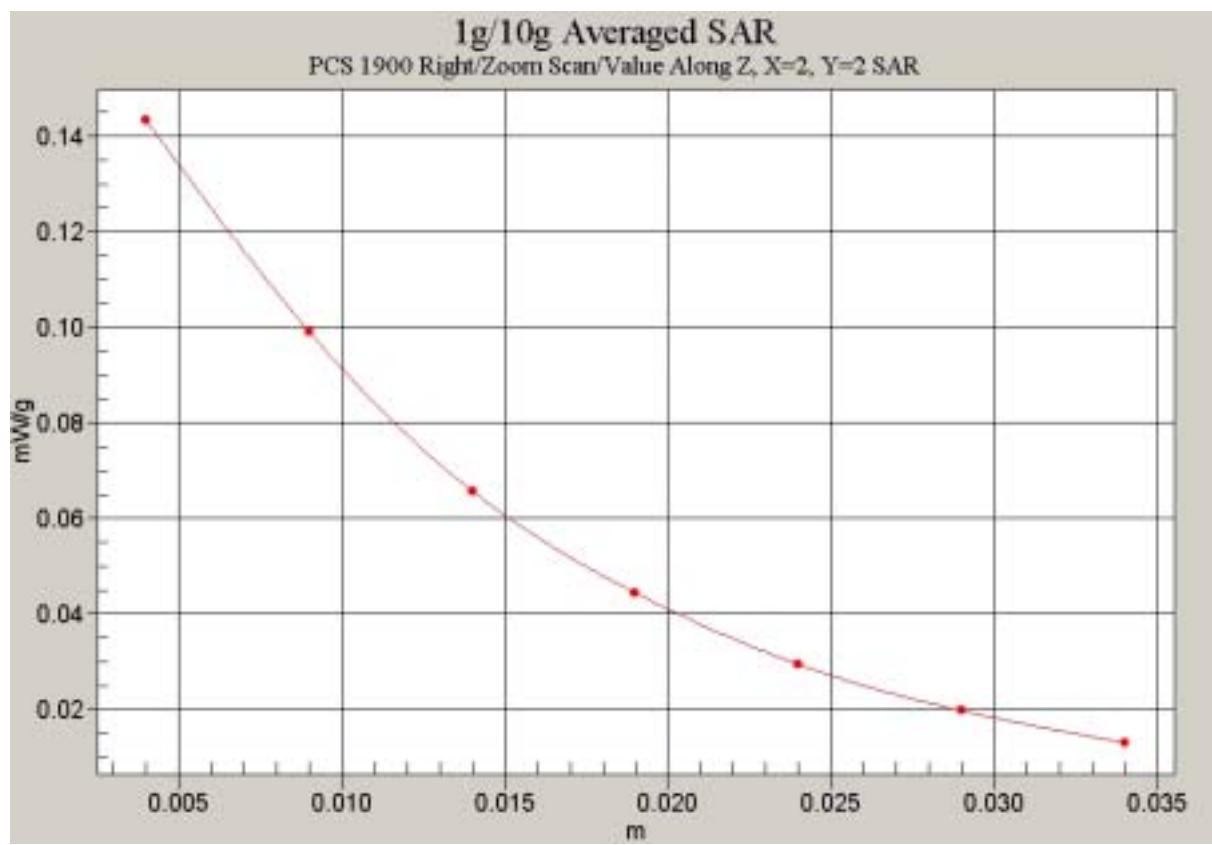

**Fig.48 Z-Scan at power reference point (Right Hand Tilt 15° 1900MHz CH810) \_GPRS**

**PCS 1900 Body Toward Ground Low**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**PCS 1900 Body Toward Ground Low /Area Scan (41x121x1):** Measurement grid:

dx=10mm, dy=10mm

Reference Value = 4.89 V/m; Power Drift = 0.1 dB

Maximum value of SAR (interpolated) = 0.103 mW/g

**PCS 1900 Body Toward Ground L/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.89 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.102 mW/g


Peak SAR (extrapolated) = 0.141 W/kg

**SAR(1 g) = 0.095 mW/g; SAR(10 g) = 0.061 mW/g**

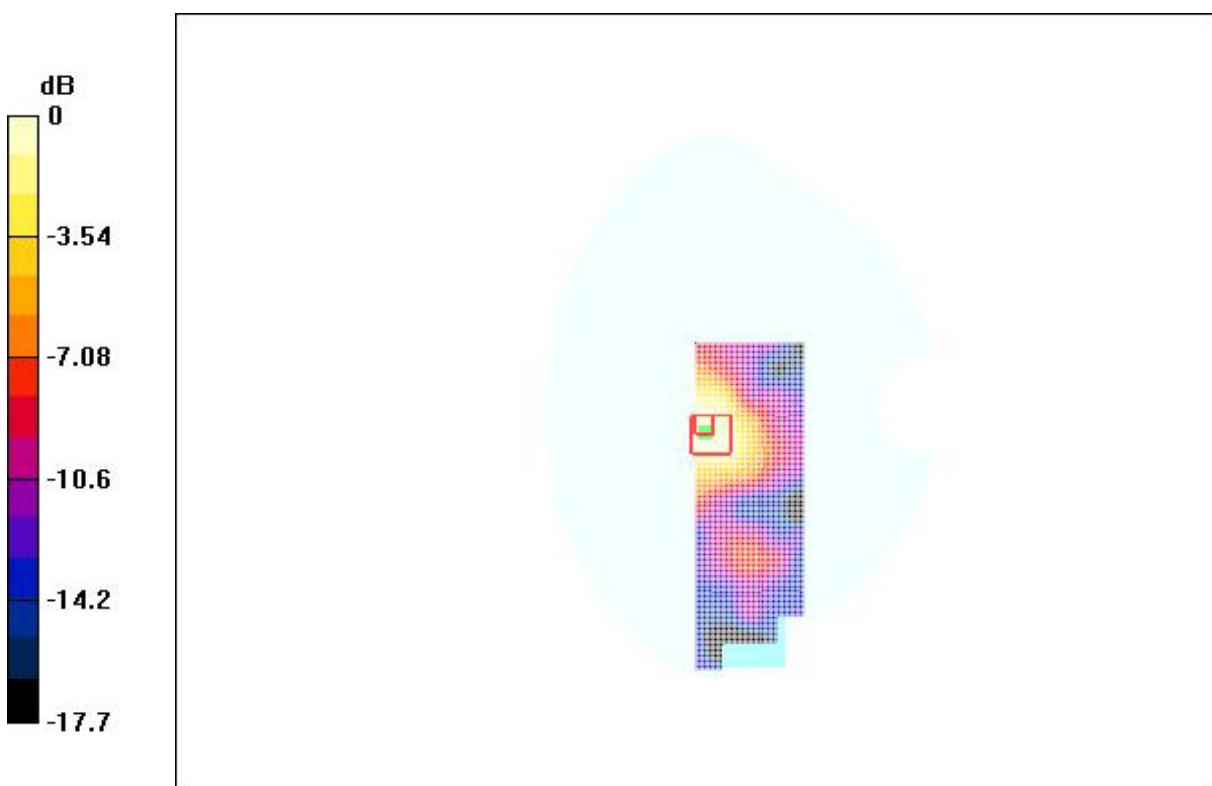

0 dB = 0.102mW/g

**Fig.49 Flat Phantom Body-worn Position 1900MHz CH512 with the display of the handset  
towards the ground**

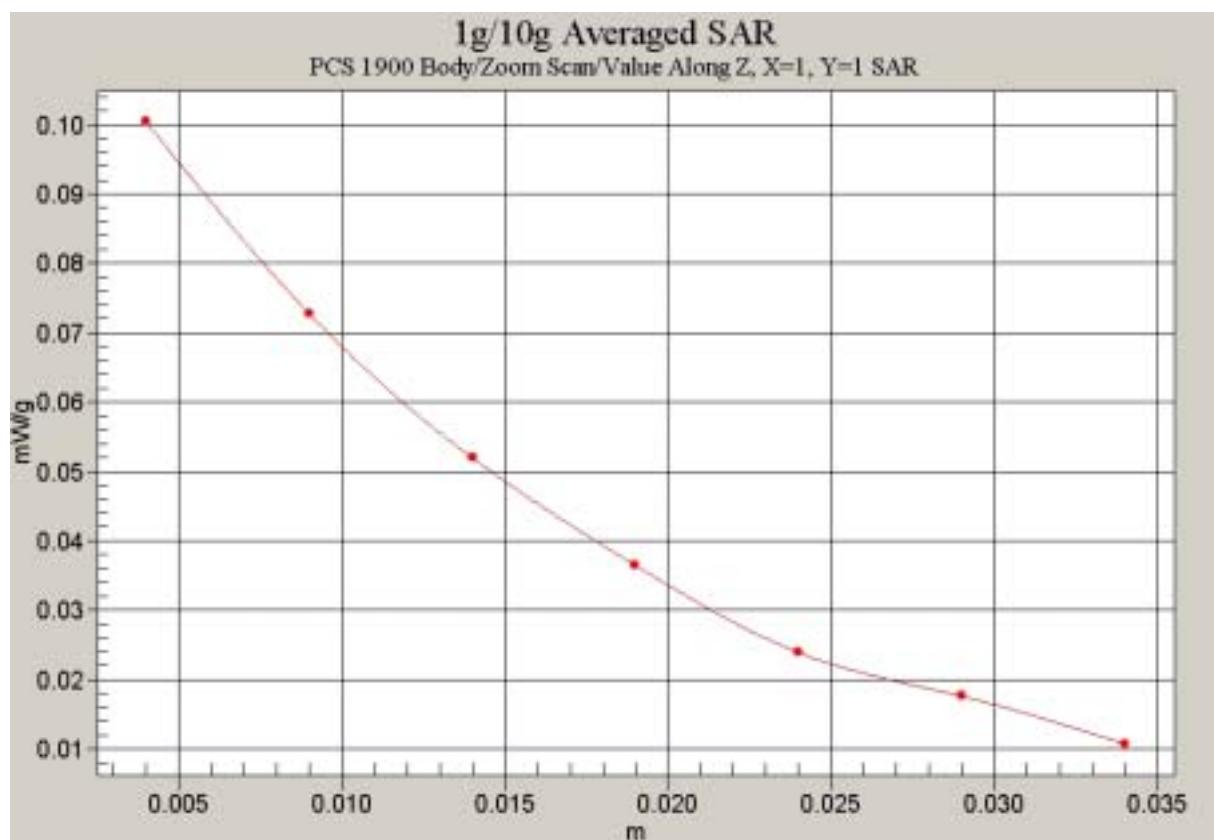

**Fig.50 Z-Scan at power reference point (Flat Phantom 1900MHz CH512 with the display of the handset towards the ground)**

**PCS 1900 Body Toward Ground Middle**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**PCS 1900 Body Toward Ground Middle/Area Scan (41x121x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 4.96 V/m; Power Drift = 0.1 dB

Maximum value of SAR (interpolated) = 0.099 mW/g

**PCS 1900 Body Toward Ground Middle/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.96 V/m; Power Drift = 0.1 dB


Maximum value of SAR (measured) = 0.101 mW/g

Peak SAR (extrapolated) = 0.136 W/kg

**SAR(1 g) = 0.091 mW/g; SAR(10 g) = 0.060 mW/g**

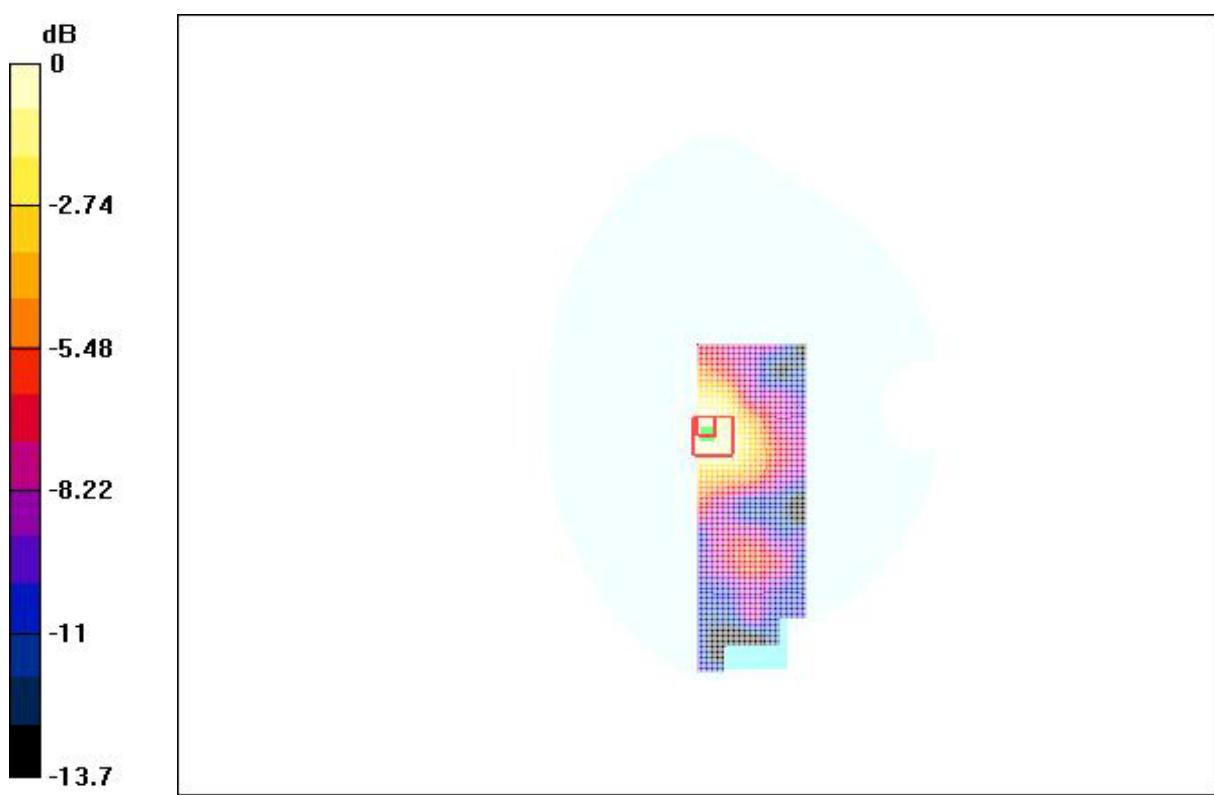

**Fig.51 Flat Phantom Body-worn Position 1900MHz CH661 with the display of the handset towards the ground**

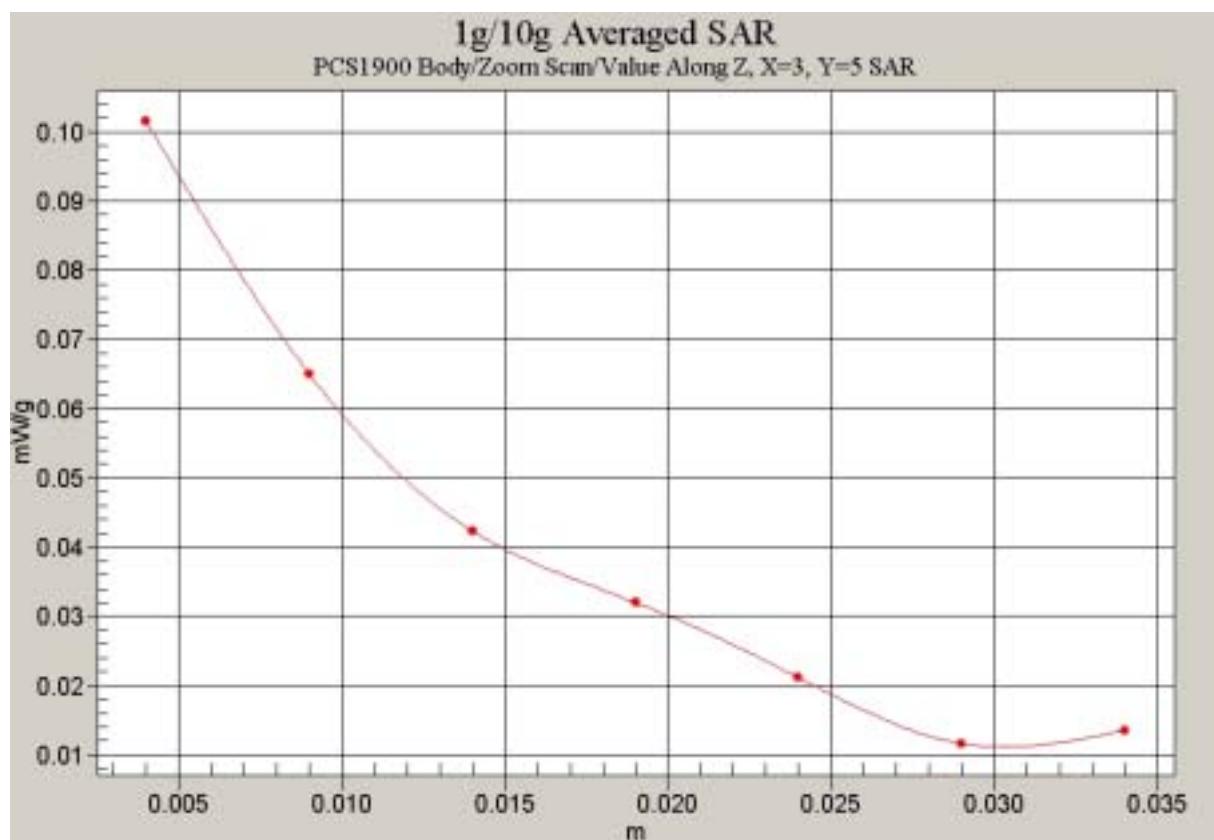

**Fig.52 Z-Scan at power reference point (Flat Phantom 1900MHz CH661 with the display of the handset towards the ground)**

**PCS 1900 Body Toward Ground High**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**PCS 1900 Body Toward Ground High/Area Scan (41x121x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 5.13 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.094 mW/g


**PCS 1900 Body Toward Ground High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.13 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.095 mW/g

Peak SAR (extrapolated) = 0.164 W/kg

**SAR(1 g) = 0.088 mW/g; SAR(10 g) = 0.058 mW/g**

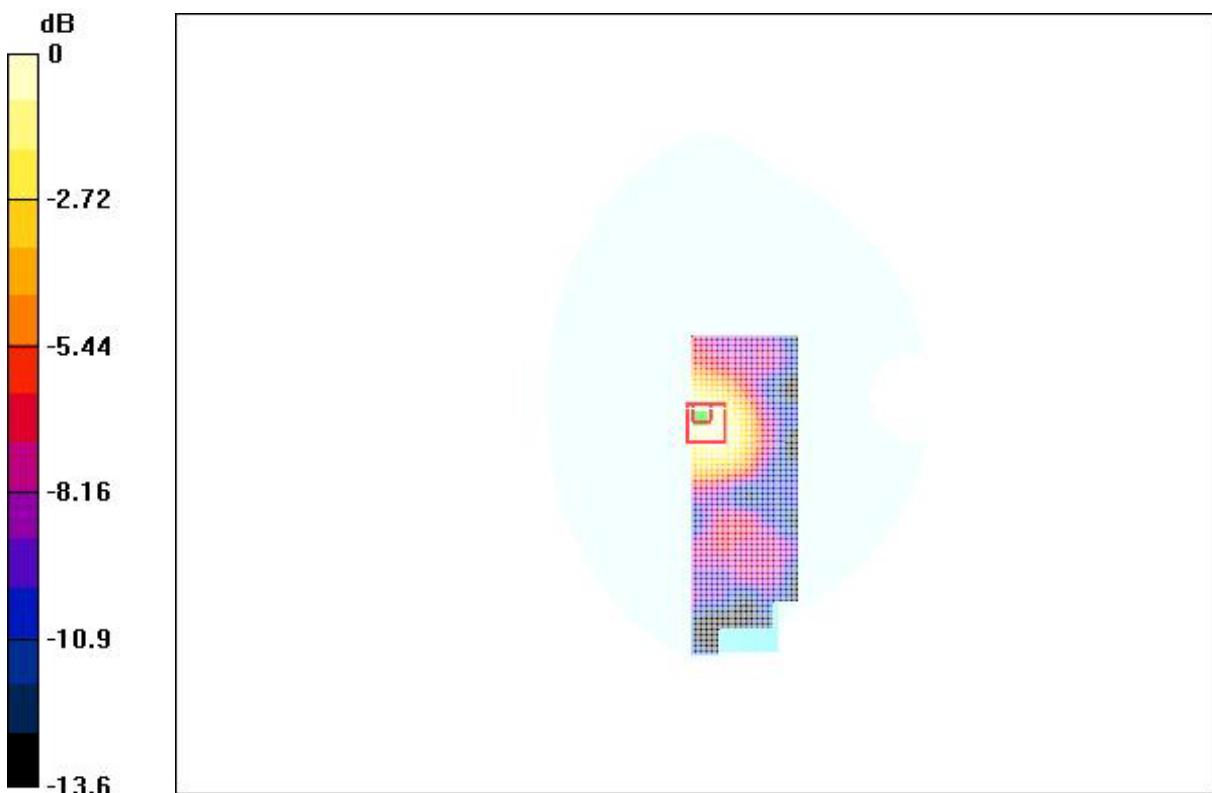

0 dB = 0.095mW/g

**Fig.53 Flat Phantom Body-worn Position 1900MHz CH810 with the display of the handset towards the ground**

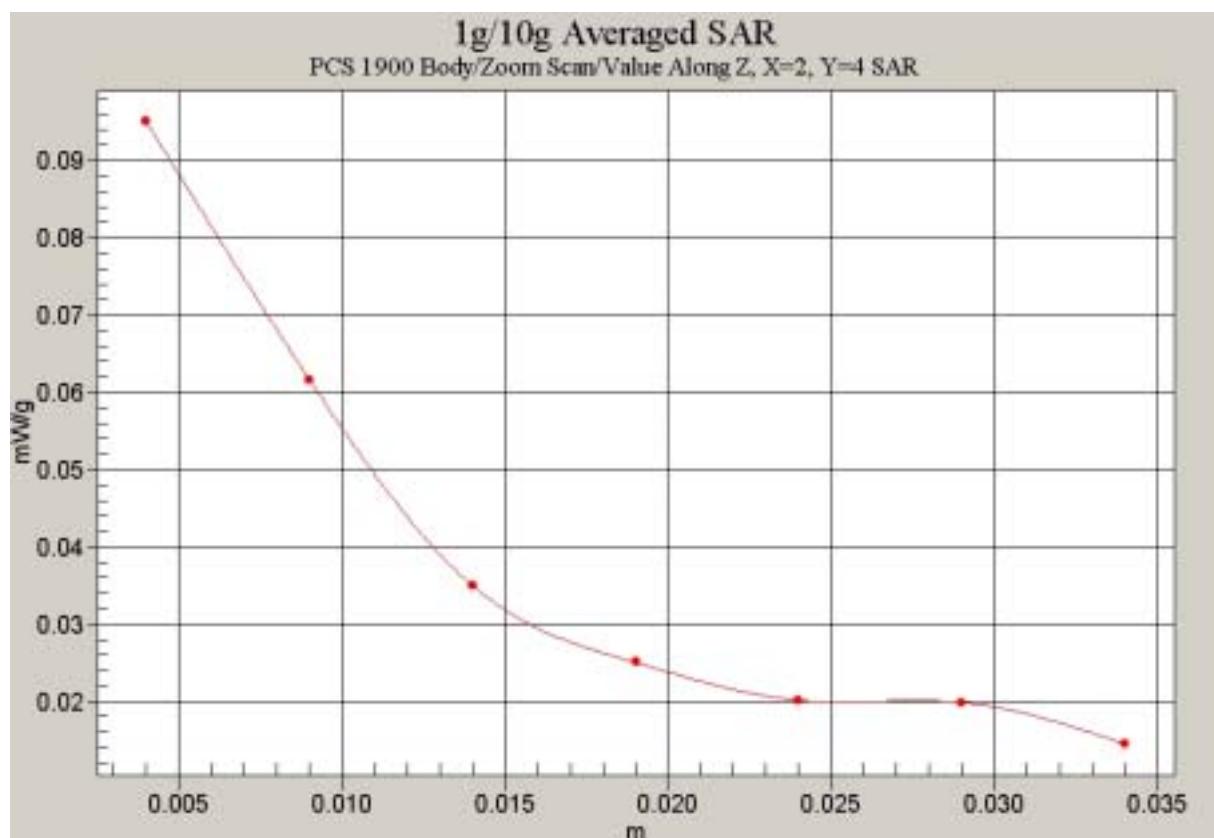


Fig.54 Z-Scan at power reference point (Flat Phantom 1900MHz CH810 with the display of the handset towards the ground)

### PCS 1900 Body Toward Ground Low

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:4

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**1900 Body Toward ground Low/Area Scan (41x121x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 4.91 V/m; Power Drift = -0.1dB

Maximum value of SAR (interpolated) = 0.105 mW/g


**PCS 1900 Body Toward ground Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.91 V/m; Power Drift = -0.1 dB


Maximum value of SAR (measured) = 0.105 mW/g

Peak SAR (extrapolated) = 0.146 W/kg

**SAR(1 g) = 0.097 mW/g; SAR(10 g) = 0.062 mW/g**

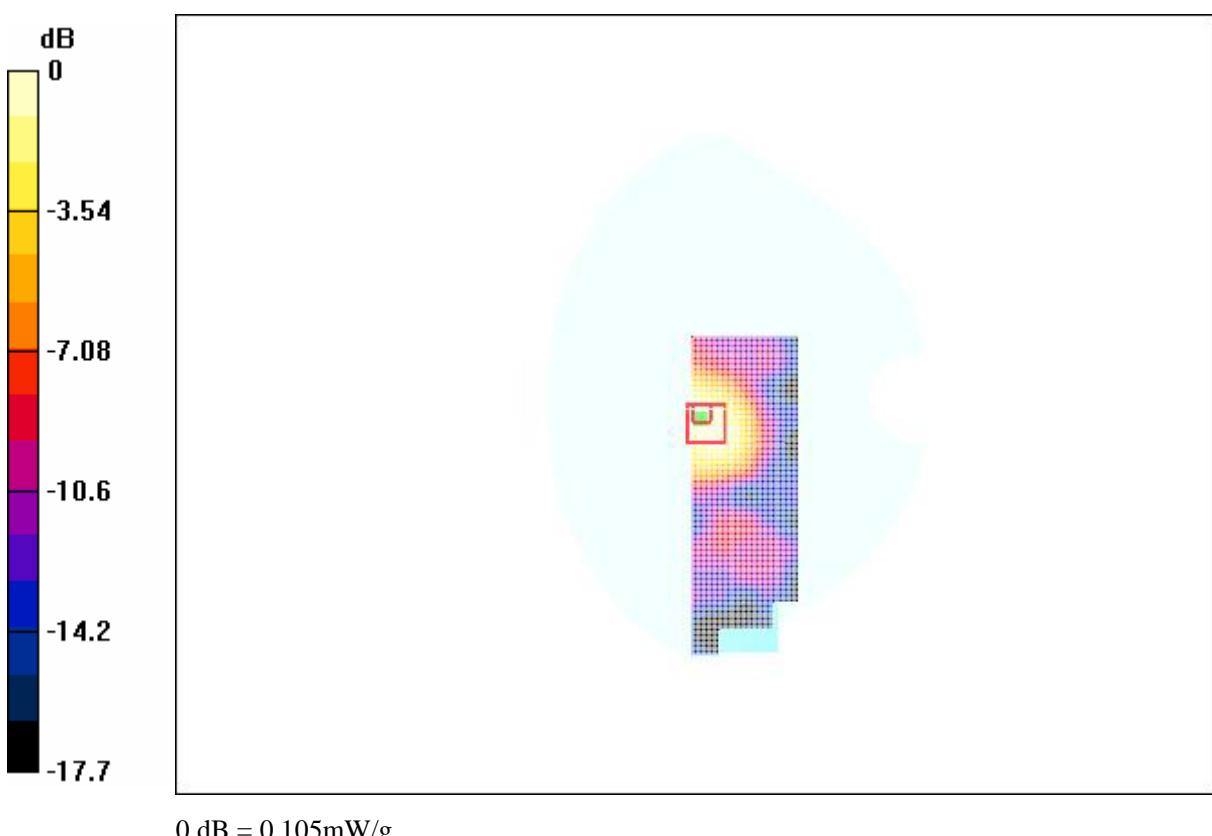

**Fig.55 Flat Phantom Body-worn Position 1900MHz CH512 with the display of the handset towards the ground\_GPRS**

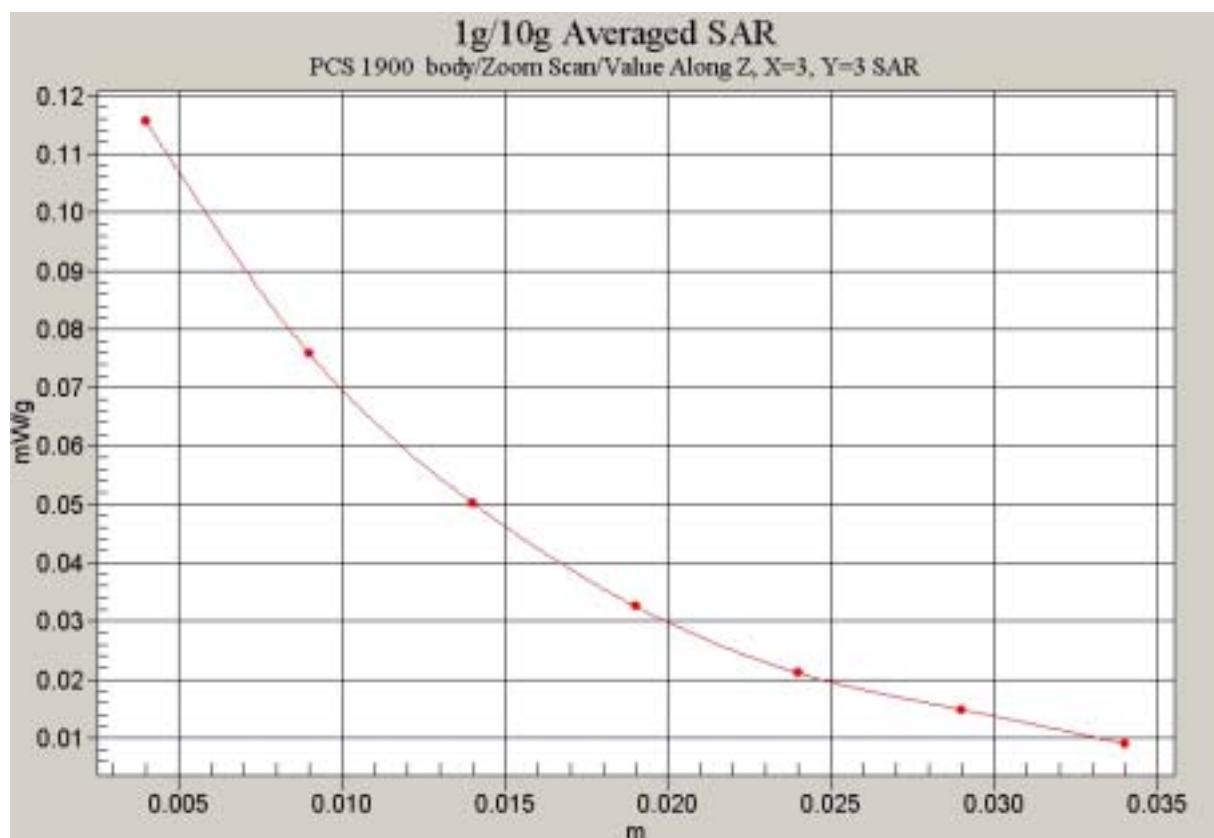

**Fig.56 Z-Scan at power reference point (Flat Phantom 1900MHz CH512 with the display of the handset towards the ground)\_GPRS**

**PCS 1900 Body Toward Ground Middle**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:4

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**PCS 1900 Body Toward Ground Middle/Area Scan (41x121x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 4.98 V/m; Power Drift = 0.1 dB

Maximum value of SAR (interpolated) = 0.101 mW/g

**PCS 1900 Body Toward Ground Middle/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.98 V/m; Power Drift = 0.1 dB


Maximum value of SAR (measured) = 0.104 mW/g

Peak SAR (extrapolated) = 0.140 W/kg

**SAR(1 g) = 0.093 mW/g; SAR(10 g) = 0.061 mW/g**

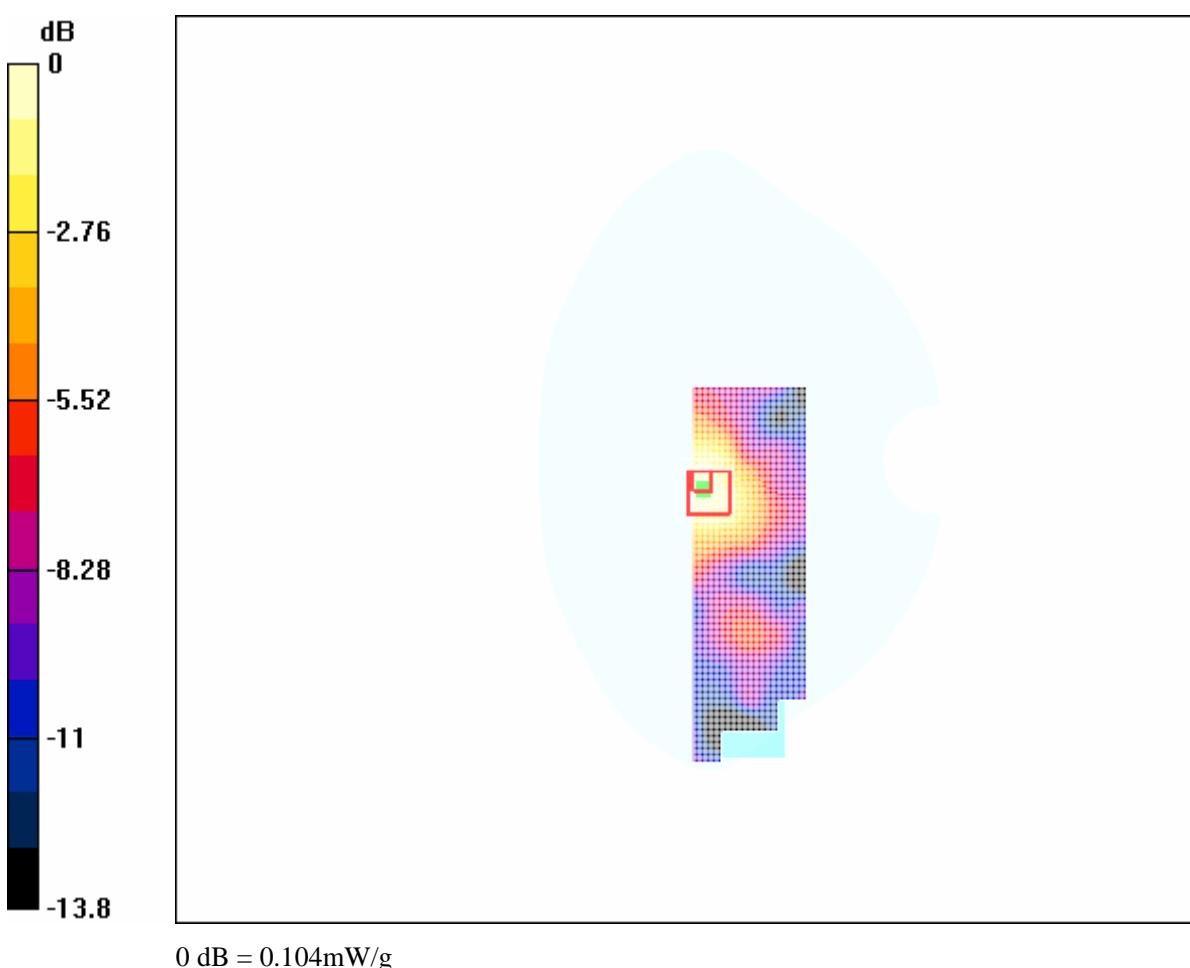

**Fig.57 Flat Phantom Body-worn Position 1900MHz CH661 with the display of the handset towards the ground\_GPRS**

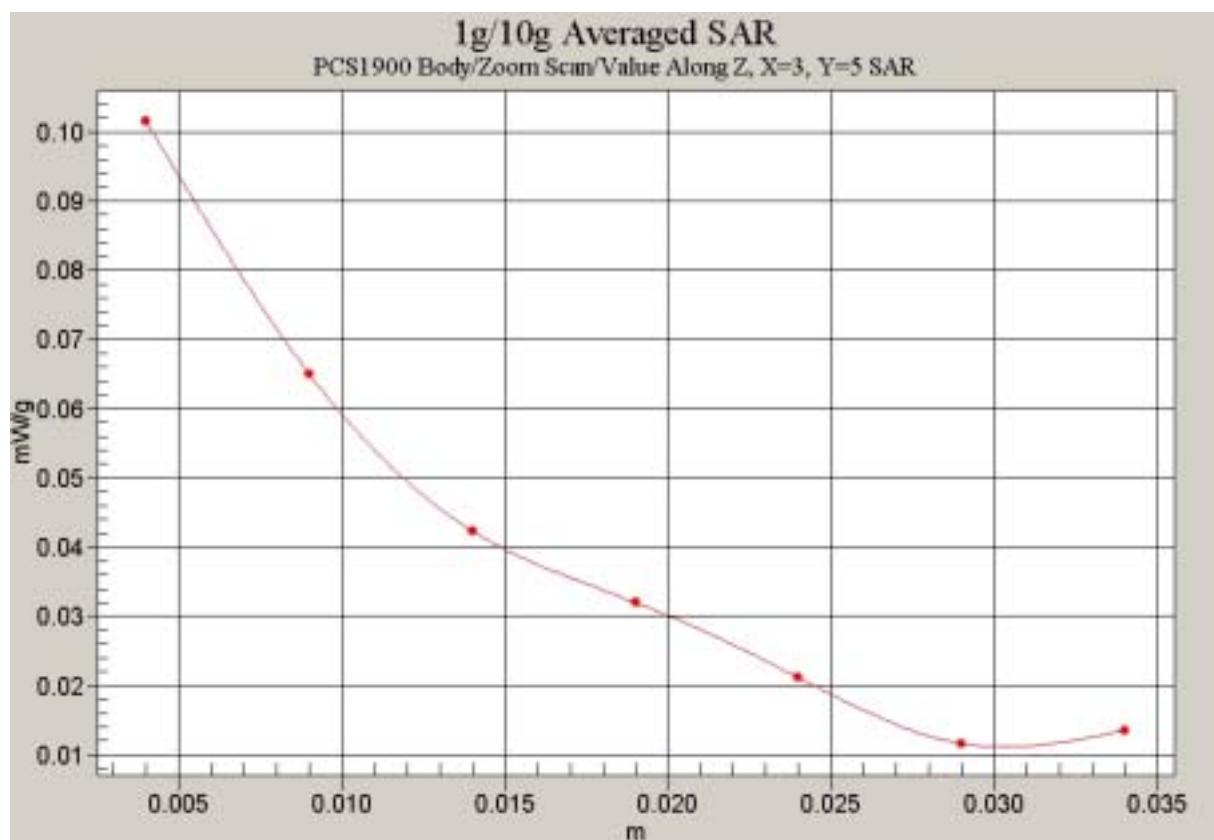

**Fig.58 Z-Scan at power reference point (Flat Phantom 1900MHz CH661 with the display of the handset towards the ground)\_GPRS**

**PCS 1900 Body Toward Ground High**

Electronics: DAE3 Sn536

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:4

Probe: ET3DV6 - SN1600 ConvF(5.04, 5.04, 5.04)

**PCS 1900 Body Toward Ground High/Area Scan (41x121x1):** Measurement grid: dx=10mm, dy=10mm

Reference Value = 5.16 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.096 mW/g


**PCS 1900 Body Toward Ground High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.16 V/m; Power Drift = -0.1 dB


Maximum value of SAR (measured) = 0.097 mW/g

Peak SAR (extrapolated) = 0.169 W/kg

**SAR(1 g) = 0.090 mW/g; SAR(10 g) = 0.059 mW/g**

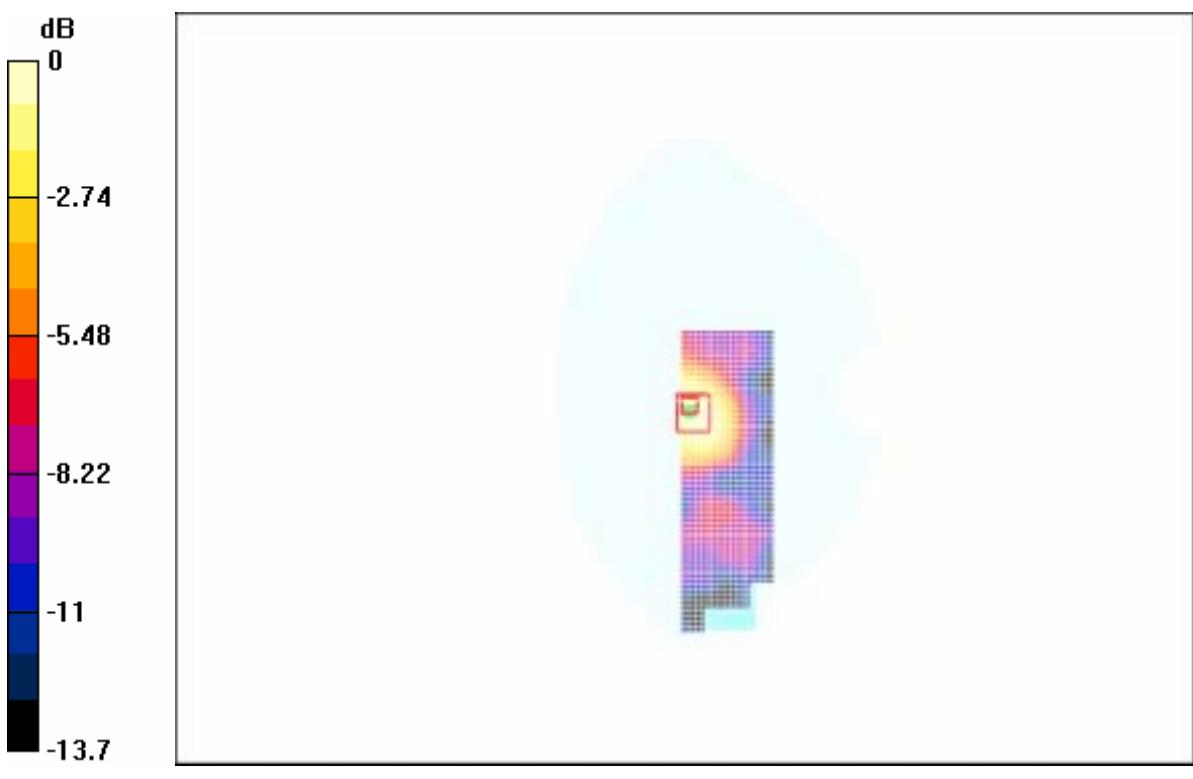

**Fig.59 Flat Phantom Body-worn Position 1900MHz CH810 with the display of the handset towards the ground\_GPRS**

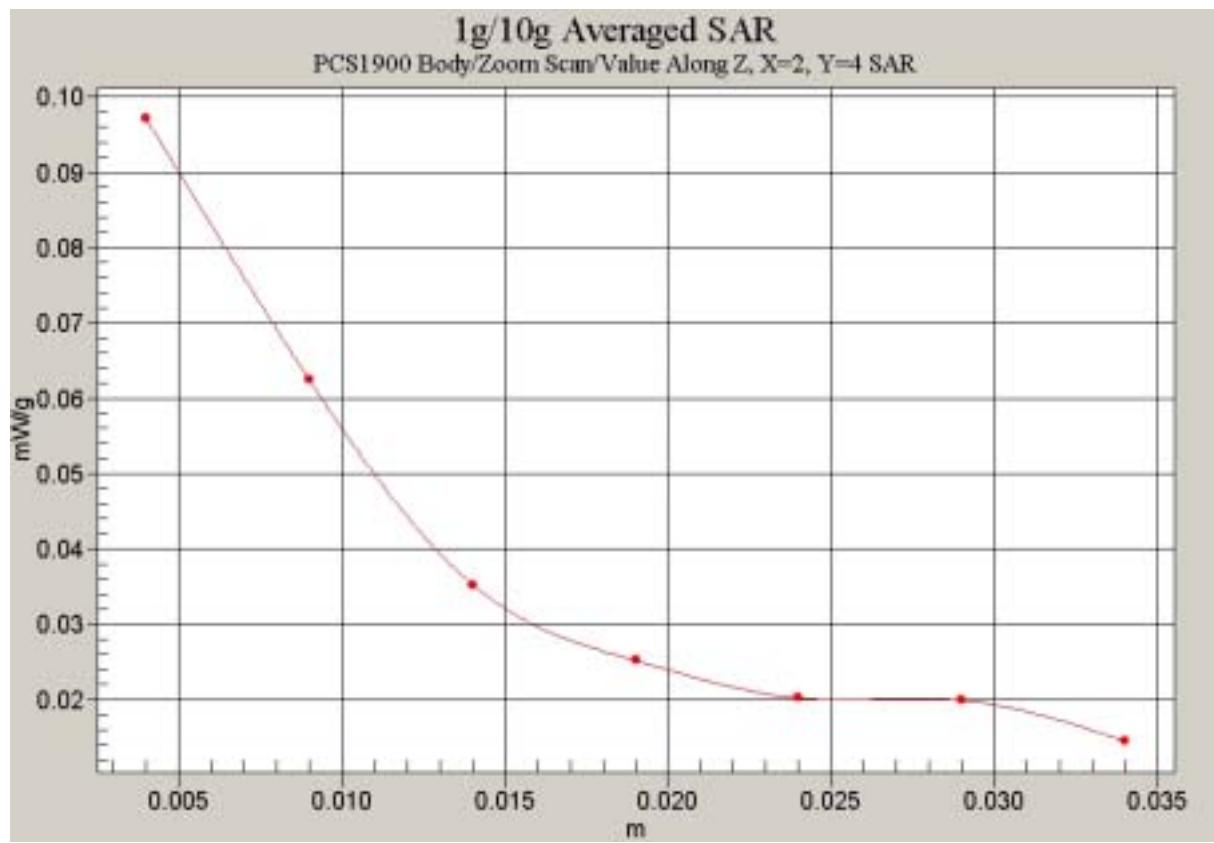

**Fig.60 Z-Scan at power reference point (Flat Phantom 1900MHz CH810 with the display of the handset towards the ground)\_GPRS**

## ANNEX D SYSTEM VALIDATION RESULTS

Test Laboratory: TMC  
File Name: D1900\_SystemCheck\_040403.da4

**DUT: Dipole 1900 MHz Type & Serial Number: D1900V2 - SN:541**  
**Program: Unnamed Program; Dipole 1900MHz**

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm  
Reference Value = 90.9 V/m

Peak SAR = 18.3 mW/g

SAR(1 g) = 9.8 mW/g; SAR(10 g) = 4.91 mW/g

Power Drift = 0.004 dB

**Area Scan (101x101x1):** Measurement grid: dx=10mm, dy=10mm

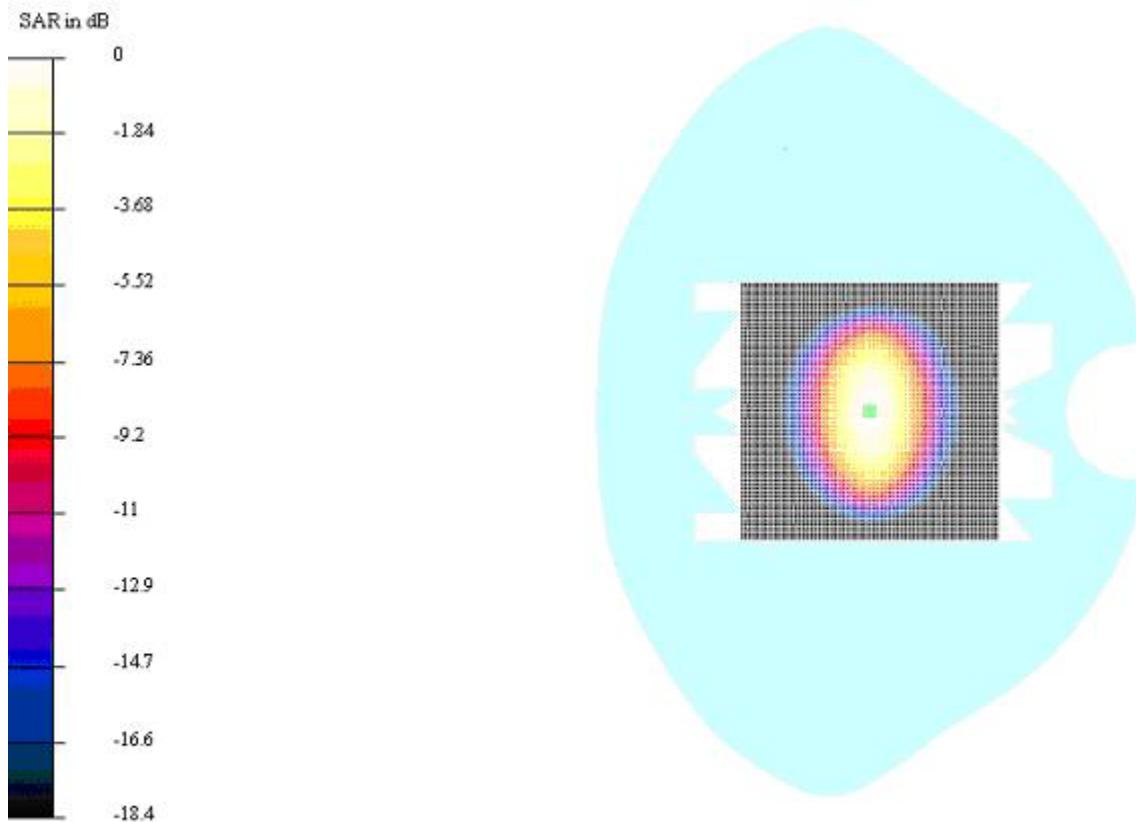


Fig.61 System Performance Check 1900MHz 250mW