

Product Specification

IEEE 802.11 a/b/g/n/ac/ax 2x2+
Bluetooth v5.2 Wireless Adapter

Project Name	WBU058-VZ
Part No.	6M01B0001C000

CHAPTER 1. MODULE OVERVIEW

The Foxconn WBU058-VZ is a highly integrated module which features a high performance 2x2 dual-band WLAN subsystem and a Bluetooth v5.2 subsystem. The WLAN subsystem contains the 802.11a/b/g/n/ac/ax radio, baseband that are designed to meet feature-rich wireless connectivity at high standards, and delivering reliable, cost-effective throughput from an extended distance. Optimized RF architecture and baseband algorithms provide superb performance and low power consumption. Intelligent MAC design deploys a high efficient offload engine and hardware data processing accelerators which fully offloads Wi-Fi task of the host processor.

1-1 Key Characteristic

- Integrate high efficiency power management unit with single 5V power supply input
- 32-bit RISC MCU for Wi-Fi/Bluetooth protocols and Wi-Fi offload
- Embedded SRAM/ROM
- IEEE 802.11 a/b/g/n/ac/ax compliant
- Support 20MHz, 40MHz, 80MHz bandwidth in 2.4GHz, 5GHz, 6GHz band
- Support Bluetooth 5.2
- Dual-band 2T2R mode
- data rate up to 800Mbps with USB3.0
- Support MU-MIMO RX
- Support uplink MU-OFDMA TX and downlink MU-OFDMA RX
- Support DBDC (dual band dual concurrent
- Support STBC, LDPC, TX Beamformer and RX Beamformee
- Greenfield, mixed mode, legacy modes support
- IEEE 802.11 d/e/h/i/j/k/mc/r/v/w support
- Security support for WFA WPA/WPA2/WPA3 personal, WPS2.0, WAPI
- QoS support of WFA WMM, WMM PS
- Bluetooth v5.2 with BLE (BT low energy)
- Supports BT/BLE dual mode
- Integrated BALUN and PA with 15dBm(class 1) transmit power
- Supports BT/Wi-Fi coexistence
- Supports 7 BT links and 16 BLE link
- Contains dual BT controllers
- Advanced FDD/TDD mode Wi-Fi/Bluetooth coexistence scheme

1-2 Pin Definition



Figure 1 Pin Definitions (Module Top View)

Table 1 Pin Definitions

Pin number	Symbol name	Type	Pin description
1	VBUS	Power	DC 5V
2	VBUS	Power	DC 5V
3	WoBLE	I/O	BT_wake on
4	GND	GND	Ground
5	GND	GND	Ground
6	DM	I/O	USB data -
7	DP	I/O	USB data +
8	GND	GND	Ground
9	WoW	I/O	Wi-Fi_wake on
10	Rst_N	I/O	reset

1-3 Power Sequence

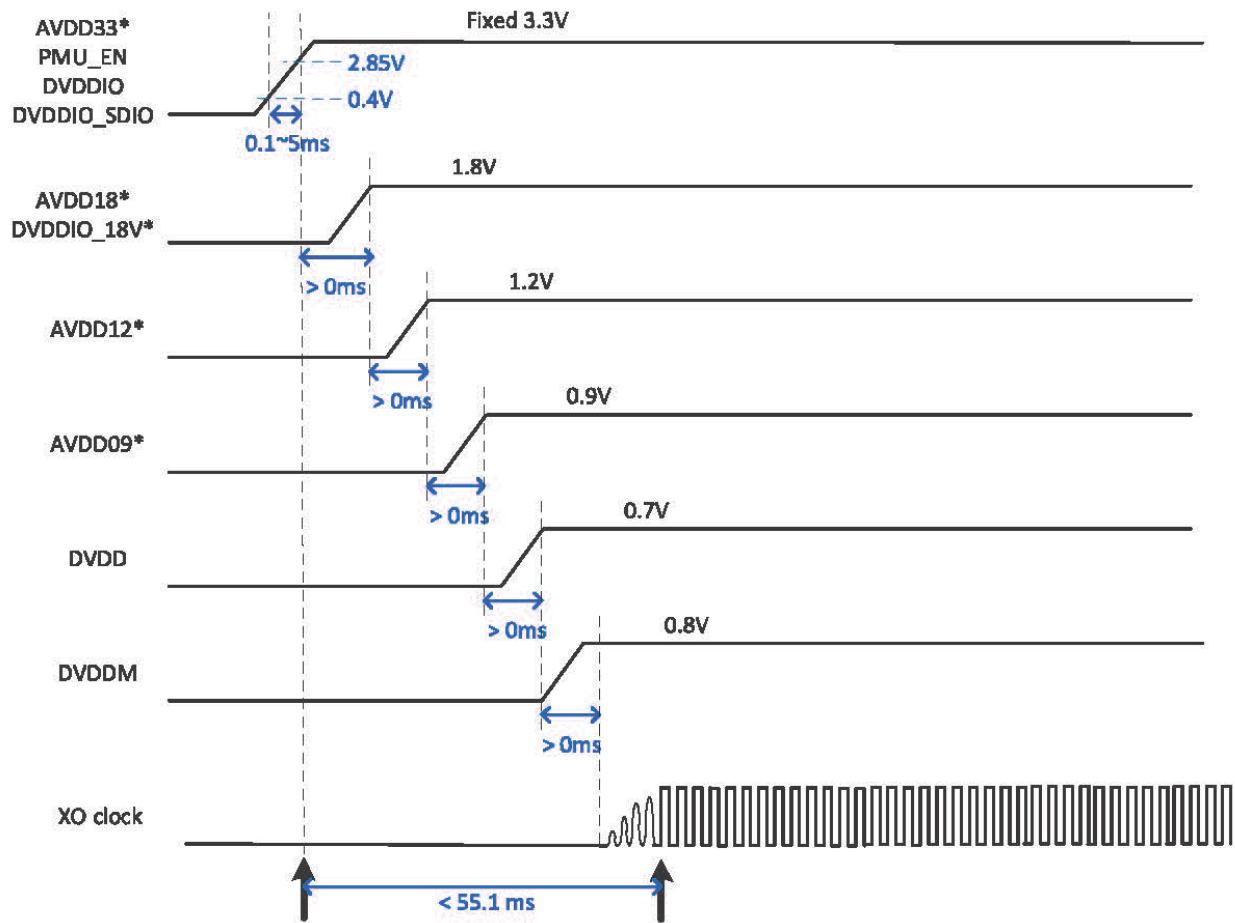


Figure 2 Power Sequence

1-4 Soldering Specification

Temperature

温度设置 (摄氏度)												
温区	1	2	3	4	5	6	7	8	9	10	11	12
上温区	135	155	160	173	175	180	185	215	240	250	249	220
下温区	135	155	160	173	175	180	185	215	240	250	249	220
传送带速度 (公分/分):	100.0											

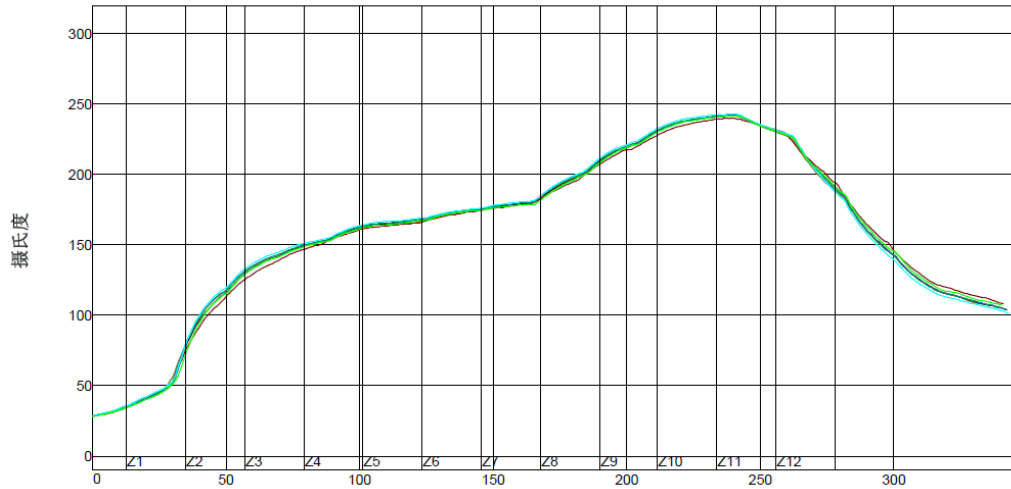


Figure 3 Soldering Specification

CHAPTER 2: ELECTRICAL AND RF SPECIFICATION

2-1 Recommended Operation Rating

Table 2 Operation Rating

	Condition	Min	Typ.	Max.	Unit
VDD	5	4.5	5	5.5	V
RF Interface	Zo		50		Ohm

2-2 WLAN RF Specification - TX

Table 3 TX Output Power Specification

Band@2.4GHz 2412~2462MHz	Data Rate	Ant 0[dBm]	Ant 1[dBm]	Ant 0+1[dBm]
802.11b	All	13	13	16
802.11g	All	11	11	14
802.11n-HT20	All	8	8	11
802.11n-HT40	All	6	6	9
802.11ax-HE20	All	8	8	11
802.11ax-HE40	All	6	6	9
Band@5GHz 5150~5350MHz 5470~5725MHz 5725~5850MHz	Data Rate	Ant 0[dBm]	Ant 1[dBm]	Ant 0+1[dBm]
802.11a	All	11	11	14
802.11n-HT20	All	10	10	13
802.11n-HT40	All	9	9	12
802.11n-HT80	All	8	8	11
802.11ac-VHT20	All	10	10	13
802.11ac-VHT40	All	9	9	12
802.11ac-VHT80	All	8	8	11
802.11ax-HE20	All	10	10	13
802.11ax-HE40	All	9	9	12
802.11ax-HE80	All	8	8	11

Band@6GHz 5925~7125MHz	Data Rate	Ant 0[dBm]	Ant 1[dBm]	Ant 0+1[dBm]
802.11ax-HE20	All	-0.5	-0.5	2.5
802.11ax-HE40	All	0.5	0.5	3.5
802.11ax-HE80	All	5	5	8

Tolerance: +/- 2dBm

2-3 WLAN RF Specification – RX

Table 4 RX Sensitivity

802.11a

Data Rate (Mbps)	Modulation	Sensitivity (dBm)		Data Rate (Mbps)	Modulation	Sensitivity (dBm)	
		Max.	Typ.			Max.	Typ.
6	OFDM	-85	-90	24	OFDM	-77	-81
9	OFDM	-84	-88	36	OFDM	-73	-78
12	OFDM	-82	-87	48	OFDM	-69	-74
18	OFDM	-80	-84	54	OFDM	-68	-72

802.11b

Data Rate (Mbps)	Modulation	Sensitivity (dBm)		Data Rate (Mbps)	Modulation	Sensitivity (dBm)	
		Max.	Typ.			Max.	Typ.
1	DBPSK	-83	-90	5.5	CCK	-82	-88
2	DQPSK	-80	-87	11	CCK	-79	-86

802.11g

Data Rate (Mbps)	Modulation	Sensitivity (dBm)		Data Rate (Mbps)	Modulation	Sensitivity (dBm)	
		Max.	Typ.			Max.	Typ.
6	OFDM	-82	-90	24	OFDM	-74	-82
9	OFDM	-81	-88	36	OFDM	-70	-78
12	OFDM	-79	-87	48	OFDM	-66	-74
18	OFDM	-77	-85	54	OFDM	-65	-72

802.11n HT20, HT40 @2.4GHz

Data Rate (Mbps)	Modulation	Sensitivity (dBm)		Data Rate (Mbps)	Modulation	Sensitivity (dBm)	
		Max.	Typ.			Max.	Typ.
HT20-MCS0	OFDM	-82	-89	HT40-MCS0	OFDM	-82	-86
HT20-MCS1	OFDM	-79	-86	HT40-MCS1	OFDM	-79	-83
HT20-MCS2	OFDM	-77	-84	HT40-MCS2	OFDM	-77	-81
HT20-MCS3	OFDM	-74	-81	HT40-MCS3	OFDM	-74	-78
HT20-MCS4	OFDM	-70	-77	HT40-MCS4	OFDM	-70	-74
HT20-MCS5	OFDM	-66	-73	HT40-MCS5	OFDM	-66	-70
HT20-MCS6	OFDM	-65	-72	HT40-MCS6	OFDM	-65	-69
HT20-MCS7	OFDM	-64	-71	HT40-MCS7	OFDM	-64	-68

802.11ax HE20, HE40 @2.4GHz

Data Rate (Mbps)	Modulation	Sensitivity (dBm)		Data Rate (Mbps)	Modulation	Sensitivity (dBm)	
		Max.	Typ.			Max.	Typ.
HE_SU20-MCS0	OFDM	-82	-89	HE_SU40-MCS0	OFDM	-82	-85
HE_SU20-MCS1	OFDM	-79	-86	HE_SU40-MCS1	OFDM	-79	-83
HE_SU20-MCS2	OFDM	-77	-84	HE_SU40-MCS2	OFDM	-77	-81
HE_SU20-MCS3	OFDM	-74	-81	HE_SU40-MCS3	OFDM	-73	-77
HE_SU20-MCS4	OFDM	-70	-77	HE_SU40-MCS4	OFDM	-70	-74
HE_SU20-MCS5	OFDM	-66	-73	HE_SU40-MCS5	OFDM	-66	-70
HE_SU20-MCS6	OFDM	-65	-72	HE_SU40-MCS6	OFDM	-65	-69
HE_SU20-MCS7	OFDM	-64	-70	HE_SU40-MCS7	OFDM	-63	-67
HE_SU20-MCS8	OFDM	-60	-66	HE_SU40-MCS8	OFDM	-58	-63
HE_SU20-MCS9	OFDM	-57	-64	HE_SU40-MCS9	OFDM	-56	-60
HE_SU20-MCS10	OFDM	-55	-60	HE_SU40-MCS10	OFDM	-53	-57
HE_SU20-MCS11	OFDM	-53	-58	HE_SU40-MCS11	OFDM	-51	-55

802.11n HT20, HT40 @5GHz
802.11 ac VHT20, VHT40 @5GHz

Data Rate (Mbps)	Modulation	Sensitivity (dBm)		Data Rate (Mbps)	Modulation	Sensitivity (dBm)	
		Max.	Typ.			Max.	Typ.
VHT/HT20-MCS0	OFDM	-82	-88	VHT/HT40-MCS0	OFDM	-79	-86
VHT/HT20-MCS1	OFDM	-79	-86	VHT/HT40-MCS1	OFDM	-76	-83
VHT/HT20-MCS2	OFDM	-77	-84	VHT/HT40-MCS2	OFDM	-74	-81
VHT/HT20-MCS3	OFDM	-74	-81	VHT/HT40-MCS3	OFDM	-71	-78
VHT/HT20-MCS4	OFDM	-70	-77	VHT/HT40-MCS4	OFDM	-67	-74
VHT/HT20-MCS5	OFDM	-66	-73	VHT/HT40-MCS5	OFDM	-63	-70
VHT/HT20-MCS6	OFDM	-65	-72	VHT/HT40-MCS6	OFDM	-62	-69
VHT/HT20-MCS7	OFDM	-64	-71	VHT/HT40-MCS7	OFDM	-61	-68
VHT20-MCS15	OFDM	-63	-70	VHT40-MCS15	OFDM	-60	-67

802.11 ax HE20, HE40 @5GHz

Data Rate (Mbps)	Modulation	Sensitivity (dBm)		Data Rate (Mbps)	Modulation	Sensitivity (dBm)	
		Max.	Typ.			Max.	Typ.
HE_SU20-MCS0	OFDM	-78	-86	HE_SU40-MCS0	OFDM	-76	-85
HE_SU20-MCS1	OFDM	-76	-83	HE_SU40-MCS 1	OFDM	-73	-81
HE_SU20-MCS2	OFDM	-74	-81	HE_SU40-MCS2	OFDM	-72	-79
HE_SU20-MCS3	OFDM	-72	-78	HE_SU40-MCS3	OFDM	-70	-74
HE_SU20-MCS4	OFDM	-69	-74	HE_SU40-MCS4	OFDM	-67	-71
HE_SU20-MCS5	OFDM	-65	-70	HE_SU40-MCS5	OFDM	-62	-67
HE_SU20-MCS6	OFDM	-61	-68	HE_SU40-MCS6	OFDM	-58	-66
HE_SU20-MCS7	OFDM	-60	-67	HE_SU40-MCS7	OFDM	-57	-64
HE_SU20-MCS8	OFDM	-58	-63	HE_SU40-MCS8	OFDM	-54	-60
HE_SU20-MCS9	OFDM	-57	-62	HE_SU40-MCS9	OFDM	-53	-59
HE_SU20-MCS10	OFDM	-54	-58	HE_SU40-MCS10	OFDM	-50	-55
HE_SU20-MCS11	OFDM	-52	-56	HE_SU40-MCS11	OFDM	-49	-53

802.11 ax HE80 @5GHz & @6GHz

Data Rate (Mbps)	Modulation	Sensitivity (dBm)		Data Rate (Mbps)	Modulation	Sensitivity (dBm)	
		Max.	Typ.			Max.	Typ.
HE_SU80-MCS0	OFDM	-73	-80	HE_SU80-MCS6	OFDM	-57	-63
HE_SU80-MCS1	OFDM	-71	-78	HE_SU80-MCS7	OFDM	-55	-62
HE_SU80-MCS2	OFDM	-69	-75	HE_SU80-MCS8	OFDM	-51	-58
HE_SU80-MCS3	OFDM	-65	-72	HE_SU80-MCS9	OFDM	-50	-56
HE_SU80-MCS4	OFDM	-62	-69	HE_SU80-MCS10	OFDM	-45	-52
HE_SU80-MCS5	OFDM	-59	-65	HE_SU80-MCS11	OFDM	-43	-49

2-4 Bluetooth RF Specification

Parameter	Condition	Min.	Typ.	Max.	Unit
Basic Data Rate - Transmit Performance					
RF Transmit Power (TRM01)		11	12	13	dBm
Power Density (TRM02)	Per 100kHz	≤20			dBm
Power Control (TRM03)		2 ≤ step size ≤ 8			dB
TX Output Spectrum - Freq. Range (TRM04)	F(low)- CH0	> 2400			MHz
	F(high)-CH78	< 2483.5			
TX Output Spectrum - 20dB BW (TRM05)		f _H -f _L < 1000			MHz
TX Output Spectrum - Adjacent Channel Power (TRM06)	f-f ₀ = 2MHz	≤ -20			dBm
	f-f ₀ ≥ 3MHz	≤ -40			
TX Output Spectrum - Out of Band Spurious Emission	30MHz - 1GHz	≤ -36			dBm
	1GHz -12.75GHz	≤ -30			
	5.15GHz -5.35GHz	≤ -47			
	5.725GHz-5.825GHz	≤ -47			
Modulation Characteristic (TRM07)	Delta f1 avg	140 ≤ Δf _{1,avg} ≤ 175			kHz
	Delta f2 max	≥ 115 at 99.9%			
	Delta f2 avg/Delta f1 avg	≥ 0.8			
Initial Carrier Frequency Tolerance (TRM08)		≤ ± 75			kHz
Carrier Frequency Drift (TRM09)	DH1	≤ ± 25			kHz
	DH3	≤ ± 40			
	DH5	≤ ± 40			
Maximum Drift Rate (TRM09)		20 kHz/50 us			
Enhanced Data Rate - Transmit Performance					
RF Transmit Power	π/4 DQPSK	11	12	13	dBm
	8DPSK	11	12	13	
Relative Transmit Power (TRM10)	All pairs	(P _{GFSK} -4 dB) < P _{DPSK} < (P _{GFSK} +1 dB)			

Carrier Frequency Stability (TRM11)	All packets	$-75 \leq w_i \leq 75$	kHz
	All blocks	$-75 \leq (w_0 + w_i) \leq 75$	
	All blocks	$-10 \leq w_0 \leq 10$	
Modulation Accuracy – RMS DEVM (TRM11)	$\pi/4$ DQPSK	≤ 20	%
	8DPSK	≤ 13	
Modulation Accuracy – Peak DEVM (TRM11)	$\pi/4$ DQPSK	≤ 35	
	8DPSK	≤ 25	
Modulation Accuracy – 99% DEVM (TRM11)	$\pi/4$ DQPSK	≤ 30	
	8DPSK	≤ 20	
EDR Differential Phase Emissions (TRM12)		≥ 99	%
In-band Spurious Emission (TRM13)	$ f-f_0 =1\text{MHz}$	≤ -26	dB
	$ f-f_0 =2\text{MHz}$	≤ -20	dBm
	$ f-f_0 \geq 3\text{MHz}$	≤ -40	
TX Output Spectrum – Out of Band Spurious Emission	30MHz – 1GHz	≤ -36	dBm
	1GHz -12.75GHz	≤ -30	
	5.15GHz -5.35GHz	≤ -47	
	5.725GHz-5.825GHz	≤ -47	
Enhanced power control (TRM14)	Step Size	$2 \leq \text{Step Size} \leq 8$	dB
	Difference. Btw. GFSK, $\pi/4$ DQPSK,&8DPSK	≤ 10	
Basic Data Rate – Receiver Performance			
Sensitivity at 0.1% BER (RCV01-02)		≤ -81	dBm
C/I Co-Channel interference (RCV03)		≤ 11	dB
C/I Adjacent CH interference (RCV03)	$ f-f_0 =1\text{MHz}$	≤ 0	
	$ f-f_0 =2\text{MHz}$	≤ -30	
	$ f-f_0 \geq 3\text{MHz}$	≤ -40	
C/I Image CH interference (RCV03)	C/I _{image}	≤ -9	
	C/I _{image±1MHz}	≤ -20	
Out of band Blocking (RCV04)	30MHz – 2000 MHz	-10	dBm
	2003MHz – 2399MHz	-27	
	2484MHz – 2997MHz	-27	
	3000MHz – 12750MHz	-10	
Intermodulation Performance at $\leq 0.1\%$ BER (RCV05)		-64	dBm
Maximum input power level		≥ -20	dBm
Spurious Emission		30MHz – 12.75GHz	≤ -57
Enhanced Data Rate – Receiver Performance			
Sensitivity at 0.1% BER (RCV07)	$\pi/4$ DQPSK	≤ -94	dBm
	8DPSK	≤ -88	
EDR BER Floor Performance at $\leq 0.0007\%$ BER (RCV08)		-60	dBm

C/I Co-Channel interference (RCV09)	$\pi/4$ DQPSK 8DPSK	$\leq +13$ $\leq +21$	dB
C/I Adjacent Channel C/I $ f-f_0 =1\text{MHz}$ (RCV09)	$\pi/4$ DQPSK 8DPSK	≤ 0 $\leq +5$	
C/I Adjacent Channel C/I $ f-f_0 =2\text{MHz}$ (RCV09)	$\pi/4$ DQPSK 8DPSK	≤ -30 ≤ -25	
C/I Adjacent Channel C/I $ f-f_0 \geq 3\text{MHz}$ (RCV09)	$\pi/4$ DQPSK 8DPSK	≤ -40 ≤ -33	
C/I Image Channel C/ I_{image} (RCV09)	$\pi/4$ DQPSK 8DPSK	≤ -7 ≤ 0	
C/I Image Channel C/ $I_{\text{image}\pm 1\text{MHz}}$ (RCV09)	$\pi/4$ DQPSK 8DPSK	≤ -20 ≤ -13	
Maximum input power level (RCV10)		≥ -20	
Spurious Emission	30MHz – 12.75GHz	≤ -57	Pass

2-5 Bluetooth Low Energy RF Specification

Parameter	Condition	Min.	Typ.	Max.	Unit
Transmit Performance					
RF Transmit Power (TRM-LE01,02)		11	12	13	dBm
In-Band Emission (TRM-LE03,04)	$ f-f_0 =2\text{MHz}$	≤ -20			dBm
	$ f-f_0 \geq 3\text{MHz}$	≤ -30			
TX Output Spectrum – Out of Band Spurious Emission	30MHz – 1GHz	≤ -36			dBm
	1GHz -12.75GHz	≤ -30			
	5.15GHz -5.35GHz	≤ -47			
	5.725GHz-5.825GHz	≤ -47			
Modulation Characteristic (TRM-LE05)	Delta f1 avg	$225 \leq \Delta f_{1\text{avg}} \leq 275$			kHz
	Delta f2 max	≥ 185 at 99.9%			
	Delta f2 avg/Delta f1 avg	≥ 0.8			
Carrier Frequency Drift (TRM-LE06,07)	Center frequency	$\leq \pm 150$			kHz
	During any packet	$\leq \pm 50$			
Maximum Drift Rate (TRM-LE06,07)		20 Hz/50 us			
Receiver Performance					
Sensitivity at 30.8% PER(0.1%BER) (RCV-LE01,02)		≤ -81			dBm
C/I Co-Channel interference (RCV-LE03)	Co-channel	≤ 21			dB
C/I Adjacent CH interference (RCV-LE03)	$ f-f_0 =1\text{MHz}$	≤ 15			
	$ f-f_0 =2\text{MHz}$	≤ -17			
	$ f-f_0 \geq 3\text{MHz}$	≤ -27			
C/I Image CH interference (RCV-LE03)	C/ I_{image}	≤ -9			
	C/ $I_{\text{image}\pm 1\text{MHz}}$	≤ -15			

Out of band Blocking (RCV-LE04)	30MHz – 2000 MHz	-30	dBm
	2003MHz – 2399MHz	-35	
	2484MHz – 2997MHz	-35	
	3000MHz – 12750MHz	-30	
Intermodulation Performance at $\leq 30.8\%$ ($\leq 0.1\%$ BER) (RCV-LE05)		-64	dBm
Maximum input power level (RCV-LE06)		≥ -10	dBm
PER Report Integrity $50\% \leq \text{PER} \leq 65.4\%$ (RCV-LE07)		-30	dBm
Spurious Emission	30MHz – 12.75GHz	≤ -57	dBm

2-6 Environment Specifications

Operating Conditions

Operation Temperature : -10 ~ 80°C

Relevant Humidity: 5 ~ 95% (non-condensing)

Storage Conditions

Non-Operation Temperature : -20 ~ 85°C (Typ. 25°C)

Relevant Humidity: 5 ~ 95% (non-condensing)

CHAPTER 3: MECHANICAL SPECIFICATION

3-1 Module Assembly Dimension

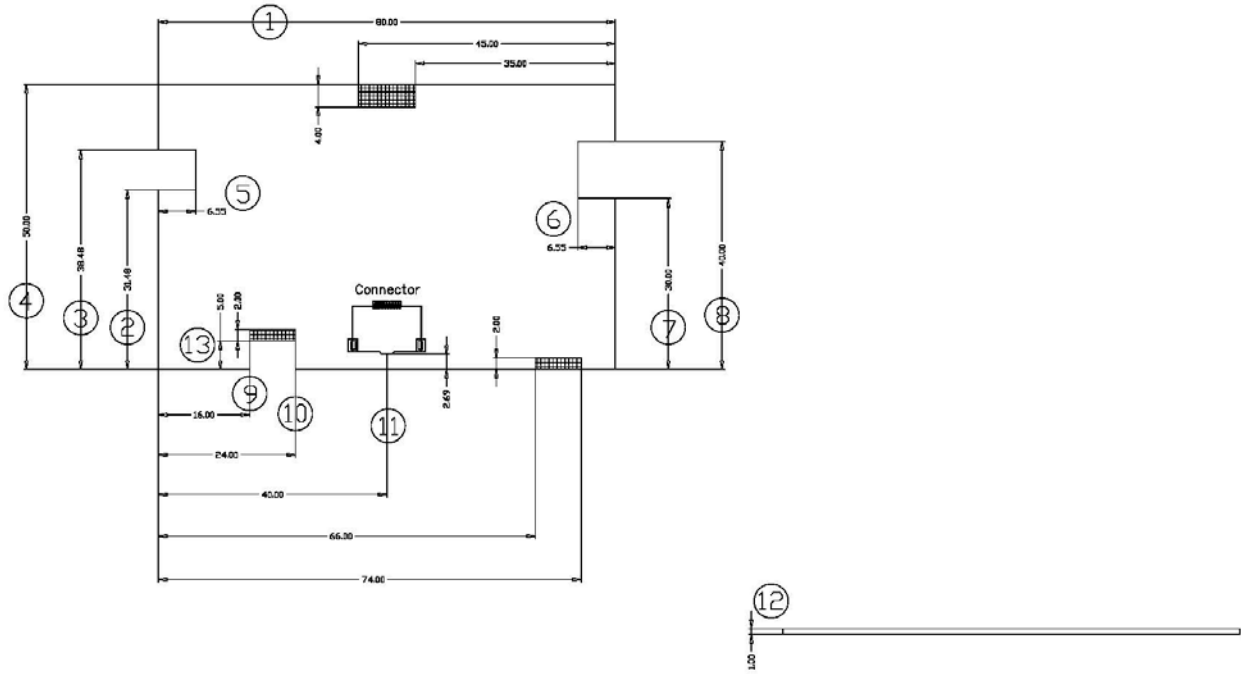


Figure 4 Mechanical Drawing

3-2 Label Specification




Figure 5 Label Drawing

CHAPTER 4: WIRELESS MODULE INSTALLATION PROCEDURE

1, Prepare wireless module and open connector as red part



2, Prepare a FFC(Flexible Flat Cable) to connect with wireless module connector and press

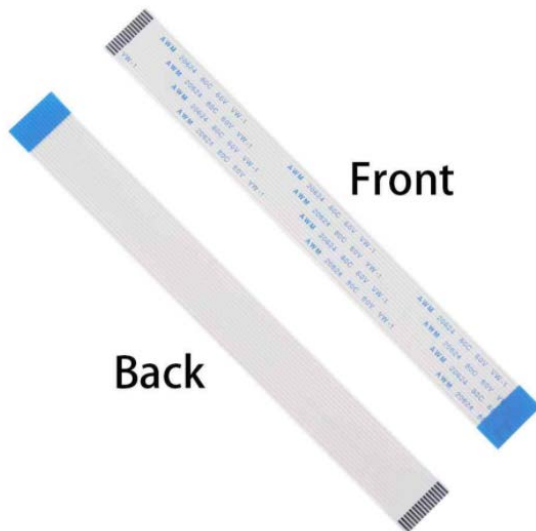

3, Another FFC site to connect with host main board and press

4, Complete

CHAPTER 5: REGULATORY STATEMENT

Indoor Client Declaration

We, Hon Hai Precision Industry Co., Ltd., will document the physical restrictions associated with the equipment classes for host products (wired power, integral antenna, non-weatherized enclosure) as conditions-of-use through the host manufacture's integration instructions.

FCC Statement:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

FCC regulations restrict the operation of this device to indoor use only.

Operations in the 6GHz bands:

- (1) 5.925-7.125GHz band are restricted to indoor usage only.
- (2) The operation of this device is prohibited on oil platforms, cars, trains, boats, and aircraft, except that operation of this device is permitted in large aircraft while flying above 10,000 feet.
- (3) Operation of transmitters in the 5.925-7.125 GHz band is prohibited for control of or communications with unmanned aircraft systems.

This device meets all the other requirements specified in Part15C, Section 15.247 and Part 15E, Section 15.407 of the FCC Rules.

Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

This device is intended only for OEM integrators under the following conditions:

1) The antenna must be installed such that 20 cm is maintained between the antenna and users, and

2) The transmitter module may not be co-located with any other transmitter or antenna.

The OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed.

3) PFF restriction:

- FCC regulations restrict the operation of this device to indoor use only.
- Operation of transmitters in the 5.925-7.125 GHz band is prohibited for control of or communications with unmanned aircraft systems.
- This device is limited to under control of a low-power indoor access point (6ID) or subordinate (6PP).
- This device cannot have a direct connection to the internet.

IMPORTANT NOTE:

In the event that these conditions can not be met (for example certain laptop configurations or co-location with another transmitter), then the FCC authorization is no longer considered valid and the FCC ID can not be used on the final product. In these circumstances, the OEM integrator will be responsible for reevaluating the end product (including the transmitter) and obtaining a separate FCC authorization.

The module is tested for standalone mobile RF exposure use condition. Any other usage conditions such as co-location with other transmitter(s) or being used in a portable condition will need a separate reassessment through a class II permissive change application or new certification.

End Product Labeling

This transmitter module is authorized only for use in device where the antenna may be installed such that 20 cm may be maintained between the antenna and users. The final end product must be labeled in a visible area with the following: "Contains FCC ID: RX3-WBU058VZ". The grantee's FCC ID can be used only when all FCC compliance requirements are met.

The end product shall bear the following 15.19 statement: This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This device to indoor use only.

Antennas

The following antennas have been certified for use with this module; antennas of the same type with equal or lower gain may also be used with this module. The antenna must be installed such that 20 cm can be maintained between the antenna and users.

WLAN Type : PCB, Internal

BT Type : PCB, Internal

Functionality	Type	Placement	Band MHz/[dBi]				
			2400-2483.5	5150-5250	5250-5350	5470-5725	5725-5850
WLAN0 (1TX/SISO)	PCB	Internal	1.00	2.50	2.68	3.07	2.75
WLAN1 (1TX/SISO)	PCB	Internal	0.77	0.89	1.68	3.67	3.67
WLAN0+WLAN1 (Array Gain)	-	-	3.90	4.74	5.20	6.39	6.23
BT0	PCB	Internal	2.83				
BT1	PCB	Internal	2.97				

Functionality	Type	Placement	Band MHz/[dBi]			
			5925-6425	6425-6525	6525-6875	6875-7125
WLAN0 (1TX/SISO)	PCB	Internal	4.35	4.35	4.34	4.02
WLAN1 (1TX/SISO)	PCB	Internal	3.37	3.85	5.77	5.78
WLAN0+WLAN1 (Array Gain)	-	-	6.88	7.11	8.09	7.95
BT0	PCB	Internal				
BT1	PCB	Internal				

Part 15 Subpart B disclaimer

This transmitter module is tested as a subsystem and its certification does not cover the FCC Part 15 Subpart B rule requirement applicable to the final host. The final host will still need to be reassessed for compliance to this portion of rule requirements if applicable.

As long as all conditions above are met, further transmitter test will not be required. However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed.

Manual Information To the End User

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module. The end user manual shall include all required regulatory information/warning as show in this manual.

The host integrator must follow the integration instructions provided in this document and ensure that the composite-system end product complies with the requirements by a technical assessment or evaluation to the rules and to KDB Publication 996369.

The host integrator installing this module into their product must ensure that the final composite product complies with the requirements by a technical assessment or evaluation to the rules, including the transmitter operation and should refer to guidance in KDB 996369.

OEM/Host manufacturer responsibilities

OEM/Host manufacturers are ultimately responsible for the compliance of the Host and Module. The final product must be reassessed against all the essential requirements of the FCC rule such as FCC Part 15 Subpart B before it can be placed on the US market. This includes reassessing the transmitter module for compliance with the Radio and EMF essential requirements of the FCC rules. This module must not be incorporated into any other device or system without retesting for compliance as multi-radio and combined equipment

ISED Statement:

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de classe B est conforme à la norme canadienne ICES-003.

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage adioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

RF Radiation Exposure Statement:

This equipment complies with ISED radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.

Operation in the band 5150-5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems.

Operations in the 6GHz bands

- (1) Operation in the band 5925-7125 MHz shall be limited to indoor use only.
- (2) Operation on oil platforms, cars, trains, boats and aircraft shall be prohibited except for on large aircraft flying above 10,000 ft.

Déclaration d'exposition aux radiations:

Cet appareil est conforme aux limites d'exposition aux rayonnements définies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé à une distance minimale de 20 centimètres entre le radiateur et votre corps.

Le fonctionnement dans la bande 5150-5250 MHz est uniquement destiné à une utilisation en intérieur afin de réduire le potentiel d'interférences nuisibles aux systèmes mobiles par satellite dans le même canal.

Opérations dans les bandes 6 GHz

- (1) bande 5925-7125 MHz Utilisation limitée à l'intérieur seulement.
- (2) Utilisation interdite à bord de plateformes de forage pétrolier, de voitures, de trains, de bateaux et d'aéronefs, sauf à bord d'un gros aéronef volant à plus de 10 000 pieds d'altitude.

This device is intended only for OEM integrators under the following conditions:

The transmitter module may not be co-located with any other transmitter or antenna.

As long as above conditions is met, further transmitter test will not be required. However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed.

Operation shall be limited to indoor use only; and

Operation on oil platforms, cars, trains, boats and aircraft shall be prohibited except for on large aircraft flying above 10,000 ft.

This device is limited to under control an indoor access point or an indoor subordinate device and shall not be capable of initiating a network.

Cet appareil est conçu uniquement pour les intégrateurs OEM dans les conditions suivantes:

Le module émetteur peut ne pas être coïmplanté avec un autre émetteur ou antenne.

Tant que les 1 conditions ci-dessus sont remplies, des essais supplémentaires sur l'émetteur ne seront pas nécessaires. Toutefois, l'intégrateur OEM est toujours responsable des essais sur son produit final pour toutes exigences de conformité supplémentaires requis pour ce module installé.

Utilisation limitée à l'intérieur seulement;

Utilisation interdite à bord de plateformes de forage pétrolier, de voitures, de trains, de bateaux et d'aéronefs, sauf à bord d'un gros aéronef volant à plus de 10 000 pieds d'altitude.

IMPORTANT NOTE:

In the event that these conditions can not be met (for example certain laptop configurations or co-location with another transmitter), then the Canada authorization is no longer considered valid and the IC ID can not be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate Canada authorization.

NOTE IMPORTANTE:

Dans le cas où ces conditions ne peuvent être satisfaites (par exemple pour certaines configurations d'ordinateur portable ou de certaines co-localisation avec un autre émetteur), l'autorisation du Canada n'est plus considéré comme valide et l'ID IC ne peut pas être utilisé sur le produit final. Dans ces circonstances, l'intégrateur OEM sera chargé de réévaluer le produit final (y compris l'émetteur) et l'obtention d'une autorisation distincte au Canada.

Required end product labeling:

This transmitter module is authorized only for use in device where the antenna may be installed and operated with greater than 20cm between the antenna and users. The final end product must be labeled in a visible area with the following: "Contains IC: 2878F-WBU058VZ".

Plaque signalétique du produit final

Ce module émetteur est autorisé uniquement pour une utilisation dans un appareil où l'antenne peut être installée et utilisée à plus de 20 cm entre l'antenne et les utilisateurs. Le produit final doit être étiqueté dans un endroit visible avec l'inscription suivante: "Contient des IC: 2878F-WBU058VZ".

Manual Information To the End User

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module.

The end user manual shall include all required regulatory information/warning as show in this manual.

The following text, or an equivalent notice, that shall be displayed in a conspicuous location, either in the user manual or on the device, or both:

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause undesired operation of the device.

Manuel d'information à l'utilisateur final

L'intégrateur OEM doit être conscient de ne pas fournir des informations à l'utilisateur final quant à la façon d'installer ou de supprimer ce module RF dans le manuel de l'utilisateur du produit final qui intègre ce module.

Le manuel de l'utilisateur final doit inclure toutes les informations réglementaires requises et avertissements comme indiqué dans ce manuel.

l'énoncé qui suit, ou l'équivalent, à un endroit bien en vue dans le manuel d'utilisation ou sur l'appareil, ou encore aux deux endroits :

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

1. L'appareil ne doit pas produire de brouillage;
2. L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Antennas

The following antennas have been certified for use with this module; antennas of the same type with equal or lower gain may also be used with this module. The antenna must be installed such that 20 cm can be maintained between the antenna and users.

This radio transmitter [2878F-WBU058VZ] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

WLAN Type : PCB, Internal

BT Type : PCB, Internal

ANTENNE

Les antennes suivantes ont été certifiées pour une utilisation avec ce module; des antennes du même type à gain égal ou inférieur peuvent également être utilisées avec ce module. L'antenne doit être installée de telle sorte que 20 cm puissent être maintenus entre l'antenne et les utilisateurs.

Cet émetteur radio [2878F-WBU058VZ] a été approuvé par Innovation, Sciences et Développement économique Canada pour fonctionner avec les types d'antenne énumérés ci-dessous, avec le gain maximal autorisé indiqué. Les types d'antenne non inclus dans cette liste qui ont un gain supérieur au gain maximum indiqué pour tout type répertorié sont strictement interdits pour l'utilisation avec cet appareil.

Type de WLAN: PCB, interne

Type de BT: PCB, interne

Functionality	Type	Placement	Band MHz/[dBi]				
			2400-2483.5	5150-5250	5250-5350	5470-5725	5725-5850
WLAN0 (1TX/SISO)	PCB	Internal	1.00	2.50	2.68	3.07	2.75
WLAN1 (1TX/SISO)	PCB	Internal	0.77	0.89	1.68	3.67	3.67
WLAN0+WLAN1 (Array Gain)	-	-	3.90	4.74	5.20	6.39	6.23
BT0	PCB	Internal	2.83				
BT1	PCB	Internal	2.97				

Functionality	Type	Placement	Band MHz/[dBi]			
			5925-6425	6425-6525	6525-6875	6875-7125
WLAN0 (1TX/SISO)	PCB	Internal	4.35	4.35	4.34	4.02
WLAN1 (1TX/SISO)	PCB	Internal	3.37	3.85	5.77	5.78
WLAN0+WLAN1 (Array Gain)	-	-	6.88	7.11	8.09	7.95
BT0	PCB	Internal				
BT1	PCB	Internal				