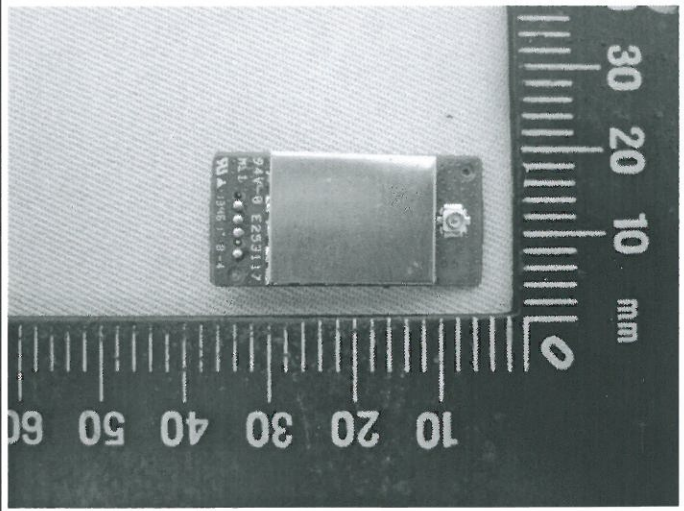




Prüfbericht-Nr.: <i>Test Report No.:</i>	10046077 001	Auftrags-Nr.: <i>Order No.:</i>	114019337	Seite 1 von 21 <i>Page 1 of 21</i>	
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	N/A	Auftragsdatum: <i>Order date.:</i>	24 Feb. 2014		
Auftraggeber: <i>Client:</i>	Hon Hai Precision Industry Co., Ltd. No.151,Sec.1,Nankan Rd.,Lujhu Township,Taoyuan County 33859,Taiwan				
Prüfgegenstand: <i>Test item:</i>	802.11b/g/n 1T1R WLAN Module				
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	WFUR7				
Auftrags-Inhalt: <i>Order content:</i>	TUV Rheinland - EMC service				
Prüfgrundlage: <i>Test specification:</i>	FCC 47 CFR Part 15, Subpart B:2013 ICES-003:Issue5:2012				
Wareneingangsdatum: <i>Date of receipt:</i>	07 Mar. 2014				
Prüfmuster-Nr.: <i>Test sample No.:</i>	A000039923-001				
Prüfzeitraum: <i>Testing period:</i>	Refer to test report				
Ort der Prüfung: <i>Place of testing:</i>	TÜV Rheinland Taiwan Ltd. (Taipei)				
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland Taiwan Ltd.				
Prüfergebnis*: <i>Test result*:</i>	Pass				
geprüft von / tested by:	 11 Mar. 2014 Neil J. N. Tsai/ Senior Project Engineer Datum Name/Stellung Unterschrift <i>Date</i> <i>Name/Position</i> <i>Signature</i>		kontrolliert von / reviewed by:  11 Mar. 2014 Max Y. C. Yao/ Department Manager Datum Name/Stellung Unterschrift <i>Date</i> <i>Name/Position</i> <i>Signature</i>		
Sonstiges / Other:					
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specifications(s) F(ail) = failed a.m. test specifications(s) N/A = not applicable N/T = not tested					
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>					

V04

TEST SUMMARY

5.1 CONDUCTED EMISSION PER SECTION 15.107, FCC 47 CFR PART 15 SUBPART B

RESULT: Pass

5.2 RADIATED EMISSION PER SECTION 15.109, FCC 47 CFR PART 15 SUBPART B

RESULT: Pass

Contents

1	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2	TEST SITES	4
2.1	TEST FACILITIES.....	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	5
2.3	CALIBRATION.....	5
2.4	ABBREVIATIONS.....	6
2.5	MEASUREMENT UNCERTAINTY	6
3	GENERAL PRODUCT INFORMATION	7
3.1	PRODUCT FUNCTION AND INTENDED USE.....	7
3.2	RATING AND PHYSICAL CHARACTERISTICS	7
3.3	NOISE GENERATING OR SOURCES OF INTERFERENCE	7
3.4	NOISE SUPPRESSING PARTS	7
3.5	SUBMITTED DOCUMENTS.....	7
4	TEST SET-UP AND OPERATION MODES	8
4.1	TEST METHODOLOGY.....	8
4.2	INDEPENDENT AND TEST OPERATION MODES.....	8
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	8
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	9
4.5	TEST SETUP	9
5	TEST RESULTS E M I S S I O N	10
5.1	CONDUCTED EMISSION PER SECTION 15.107, 47 CFR PART 15 SUBPART B.....	10
5.2	RADIATED EMISSION PER SECTION 15.109, 47 CFR PART 15 SUBPART B	13
6	PHOTOGRAPHS OF TEST SETUP.....	18
7	LIST OF TABLES	21
8	LIST OF FIGURES.....	21
9	LIST OF PICTURES.....	21

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report.

2 Test Sites

2.1 Test Facilities

TÜV Rheinland Taiwan Ltd.

11F., No.758, Sec. 4, Bade Rd., Songshan Dist., Taipei City 105, Taiwan, R.O.C.

The Federal Communications Commission has reviewed the technical characteristics of the radiated and conducted emission facilities and has found these test sites to be in compliance with the requirements under 47 CFR section 2.948. The registration number: 365730.

The Industry Canada has reviewed the technical characteristics of the radiated and conducted emission facilities and has found these test sites to be in compliance with the Canadian requirements. The filing number: 9465A.

The test facility is accredited by TAF (member of ILAC), under number 0759 according to ISO/IEC 17025:2005.

TÜV Rheinland Taiwan Ltd. is accredited by the Federal Communications Commission as a Conformity Assessment Body under Designation Number TW1065 and Test Firm Registration#: 799772.

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment
For EMI/ Conduction Measurement (Taipei: Shield Room)

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibration Due Date
1	Test Receiver	Rohde & Schwarz	ESCI7	100797	2014/12/23
2	LISN (1 phase)	Rohde & Schwarz	ENV216	101243	2014/06/05
3	LISN	Rolf Heine	NNB-2/16Z	99080	2014/08/30
4	Telecom ISN 2 Line	FCC	FCC-TLISN-T2-02-09	101169	2014/08/29
5	Telecom ISN 8 Line	FCC	FCC-TLISN-T8-02-09	101167	2014/08/29
6	4 balance telecom pair ISN	FCC	F-070306-1057-1	101166	2014/08/29

For EMI/Radiation Measurement (Taipei: Semi-Anechoic Chamber)

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibration Due Date
1	Test Receiver	Rohde & Schwarz	ESR7	101062	2014/09/01
2	Spectrum Analyzer	Rohde & Schwarz	FSV-40	100921	2014/12/09
3	Pre-Amplifier	HP	8447F	2805A03335	2014/09/02
4	Pre-Amplifier	Com-Power	PAM-840	461257	2014/09/02
5	Pre-Amplifier	EM Electronics	EM01G18G	060558	2014/10/24
6	Bilog Antenna	TESEQ	CBL6111D	29802	2014/06/29
7	Horn Antenna	ETS-Lindgren	3117	00138160	2015/01/10
8	Horn Antenna	Com-Power	AH-840	101029	2014/09/19
9	Loop Antenna	Schwarzbeck	FMZB 1513	1513-076	2014/09/28

Conformance of the used measurement and test equipment with the requirements of ISO/IEC 17025:2005 has been confirmed before testing.

2.3 Calibration

All equipment requiring calibration is calibrated periodically by the manufacturer or accredited calibration services according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.4 Abbreviations

PASS means 'complied with requirement'	N/A means 'not applicable'
FAIL means 'not complied'	N.C.R. means 'no calibration required'

2.5 Measurement Uncertainty

Table 2: Measurement Uncertainty

Testing Item	Frequency Range	Uncertainty
Conducted Emission (Shield Room)	150kHz - 30MHz	2.47 dB
Radiated Emission (966 Chamber: 3m)	30MHz - 1000MHz	2.80 dB
Radiated Emission (966 Chamber: 3m)	Above 1GHz	3.04 dB

Note:

The uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3 General Product Information

3.1 Product Function and Intended Use

The tested sample is an "802.11b/g/n 1T1R WLAN Module" with model number "WFUR7" for new approval. The tested sample is intended to enable wireless connect with other WLAN devices, which is connect with a control host panel, the panel power was supplied via the USB port, and also provided a connection with host Notebook to set the module into continuous wave operation mode via "REALTEK 11n 8188EUS" software for all testing.

3.2 Rating and Physical Characteristics

Type Designation:	WFUR7
Input Voltage:	3.3Vdc for EUT; 5Vdc via USB port for Control host panel
Protection Class:	III

For details, refer to rating labels and user manual.

3.3 Noise Generating or Sources of Interference

- 1) IC circuits

Please refer to attachment photo document for detail

3.4 Noise Suppressing Parts

Please refer to Attachment Photo Documentation for details.

3.5 Submitted Documents

- 1) Antenna spec

4 Test Set-up and Operation Modes

4.1 Test Methodology

The test methodology used is based on the requirement of 47 CFR PART 15, section 15.31, 15.33, 15.35, 15.107 and 15.109, or of ICES-003.

The test methods, which have been used, are based on ANSI C63.4 or CAN/CSA-CEI/IEC CISPR 22.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Independent and Test Operation Modes

The EUT was connected with a control host panel, the panel power was supplied via the USB port, and also provided a connection with host Notebook to set the module into continuous wave operation mode via "REALTEK 11n 8188EUS" software.

The basic operation mode is:

A. Continuous wave operation

The justification and manipulation of cables and equipment in order to simulate a worst-case behavior of the test setup has been carried out as prescribed in ANSI C 63.4 or in CAN/CSA-CEI/IEC CISPR22.

Refer to Test setup in chapter 4.5.

4.3 Special Accessories and Auxiliary Equipment

The EUT was tested as an independent unit with the following equipment:

Description	Manufacturer	Model No.	Remark	Certification
Notebook	HP	HSTNN-Q78C-3	CNF0339QBM	DoC
Printer	HP	VCVRA-1004	CN0C711HY9	DoC
Ear/Microphone	i-Acon	CW-010MV	N/A	N/A
Mouse	Lenovo	MO28UOL	44E6889	DoC


4.4 Countermeasures to achieve EMC compliance

The test sample which has been tested contained the noise suppression parts as described in the constructional data form or technical construction file or refer to the attachment photo document of test report. No additional measures were employed to achieve compliance.

4.5 Test Setup

The test setup was realized on a table of 80cm height during all the tests.

The test arrangement is configured and set according to manufacturer's installations.

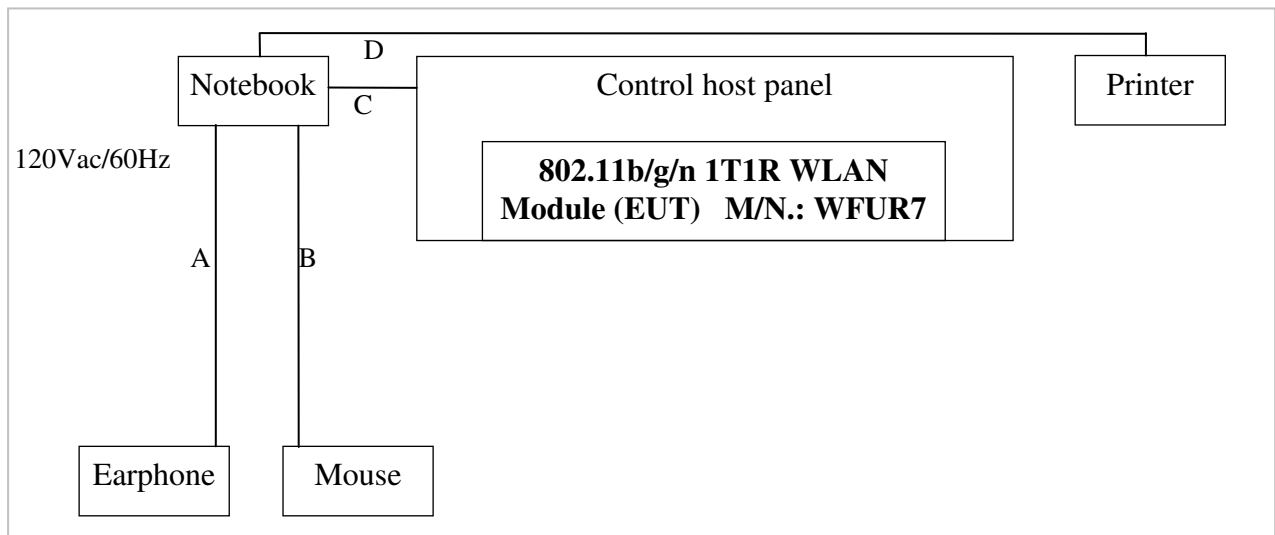

Signal Cable Type		Signal Cable Description
A	Audio cable	Non Shielded, 2m
B	USB cable	Shielded, 1.8m
C	USB cable	Shielded, 0.7m
D	USB cable	Shielded, 1.7m

5 Test Results EMISSION

5.1 Conducted Emission per section 15.107, 47 CFR part 15 subpart B


RESULT:**PASS**

Port: AC Mains
Test Procedure : ANSI C63.4 (2009) Clause 7.3
Deviations from standard
test procedure : None
Frequency Range : 0.15 – 30MHz
Limits : FCC Part 15 Subpart B Section 15.107 (a) class B
Kind of Test Site : Conducted Room (Shield)

Test Setup

The following setup caused the highest disturbance:


Date of Testing : 10 Mar. 2014
Input Voltage : See 3.2
Operational Mode : See 4.2
Temperature : 19 °C
Relative Humidity : 57 %

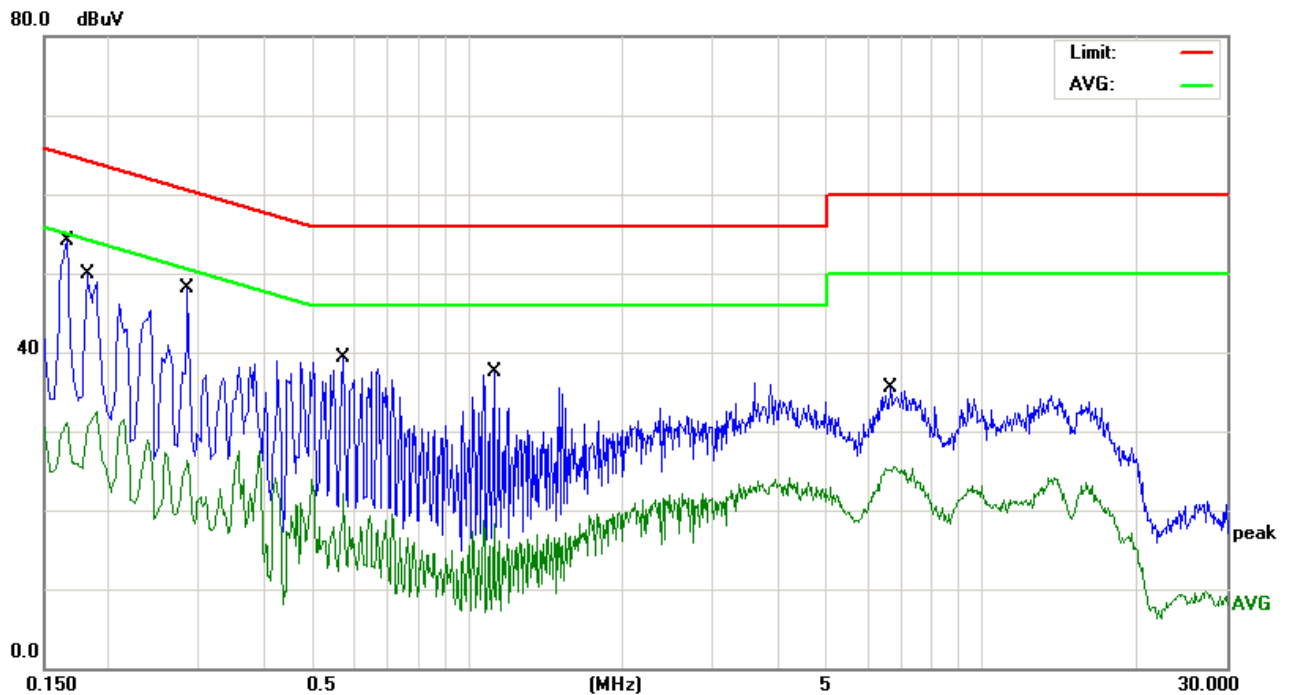Figure 1: Conducted Emission, AC Mains; 0.15 – 30 MHz
Phase L1


No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1660	9.62	35.83	45.45	65.15	-19.70	QP	P	
2	0.1660	9.62	17.51	27.13	55.15	-28.02	AVG	P	
3	0.1819	9.60	31.88	41.48	64.39	-22.91	QP	P	
4	0.1819	9.60	16.56	26.16	54.39	-28.23	AVG	P	
5	0.2860	9.59	21.90	31.49	60.64	-29.15	QP	P	
6	0.2860	9.59	11.75	21.34	50.64	-29.30	AVG	P	
7	0.5740	9.59	19.99	29.58	56.00	-26.42	QP	P	
8	0.5740	9.59	6.13	15.72	46.00	-30.28	AVG	P	
9	1.1260	9.60	11.95	21.55	56.00	-34.45	QP	P	
10	1.1260	9.60	0.82	10.42	46.00	-35.58	AVG	P	
11	6.6580	9.66	19.37	29.03	60.00	-30.97	QP	P	
12	6.6580	9.66	11.84	21.50	50.00	-28.50	AVG	P	

Note 1: Level = Reading + Factor

Note 2: Margin = Level - Limit

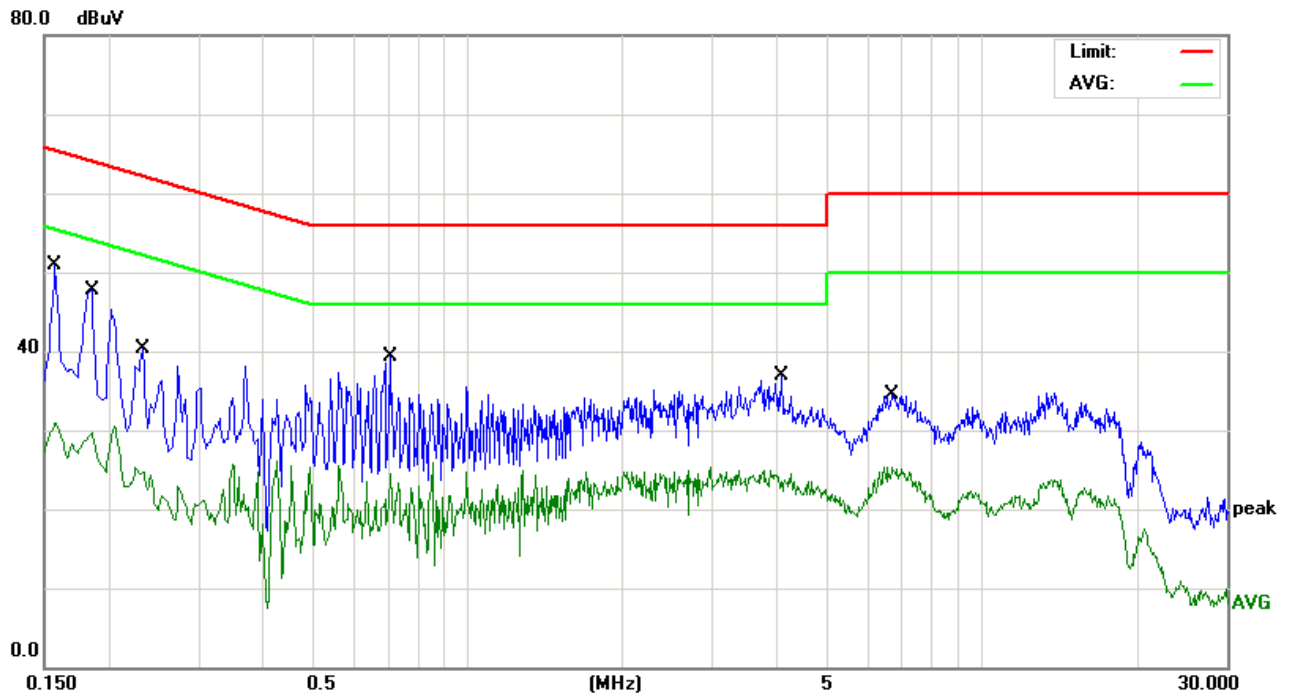Phase N


No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1580	9.59	32.33	41.92	65.56	-23.64	QP	P	
2	0.1580	9.59	19.15	28.74	55.56	-26.82	AVG	P	
3	0.1860	9.57	26.81	36.38	64.21	-27.83	QP	P	
4	0.1860	9.57	17.44	27.01	54.21	-27.20	AVG	P	
5	0.2340	9.57	22.63	32.20	62.30	-30.10	QP	P	
6	0.2340	9.57	12.73	22.30	52.30	-30.00	AVG	P	
7	0.7060	9.57	19.21	28.78	56.00	-27.22	QP	P	
8	0.7060	9.57	10.56	20.13	46.00	-25.87	AVG	P	
9	4.0860	9.60	18.68	28.28	56.00	-27.72	QP	P	
10	4.0860	9.60	11.98	21.58	46.00	-24.42	AVG	P	
11	6.6740	9.63	19.02	28.65	60.00	-31.35	QP	P	
12	6.6740	9.63	11.34	20.97	50.00	-29.03	AVG	P	

Note 1: Level = Reading + Factor

Note 2: Margin = Level - Limit

5.2 Radiated Emission

per section 15.109, 47 CFR part 15 subpart B

RESULT:**PASS**

Port: Enclosure
Test Procedure : ANSI C63.4 (2009) Clause 8.3
Deviations from standard
test procedure : None
Frequency Range : 30 – 1000MHz
Limits : FCC Part 15 Subpart B Section 15.109 (a) class B
Kind of Test Site : 966 Semi-anechoic chamber (3m distance)

Test Setup


The following setup caused the highest disturbance:

Date of Testing : 07 Mar. 2014
Input Voltage : See 3.2
Operational Mode : See 4.2
Temperature : 19.5 °C
Relative Humidity : 59 %

The highest frequency generated or used in the device or on which the operates or tunes of the EUT:

- below 1.705M, measuring up to 30MHz
 1.705-108M, measuring up to 1000MHz
 108-500MHz, measuring up to 2000MHz
 500-1000MHz, measuring up to 5000MHz
 above 1000MHz, measuring up to 5th harmonic of the highest frequency or 40GHz, whichever is lower.


Note: The highest frequency is 2.4GHz for WLAN operation.

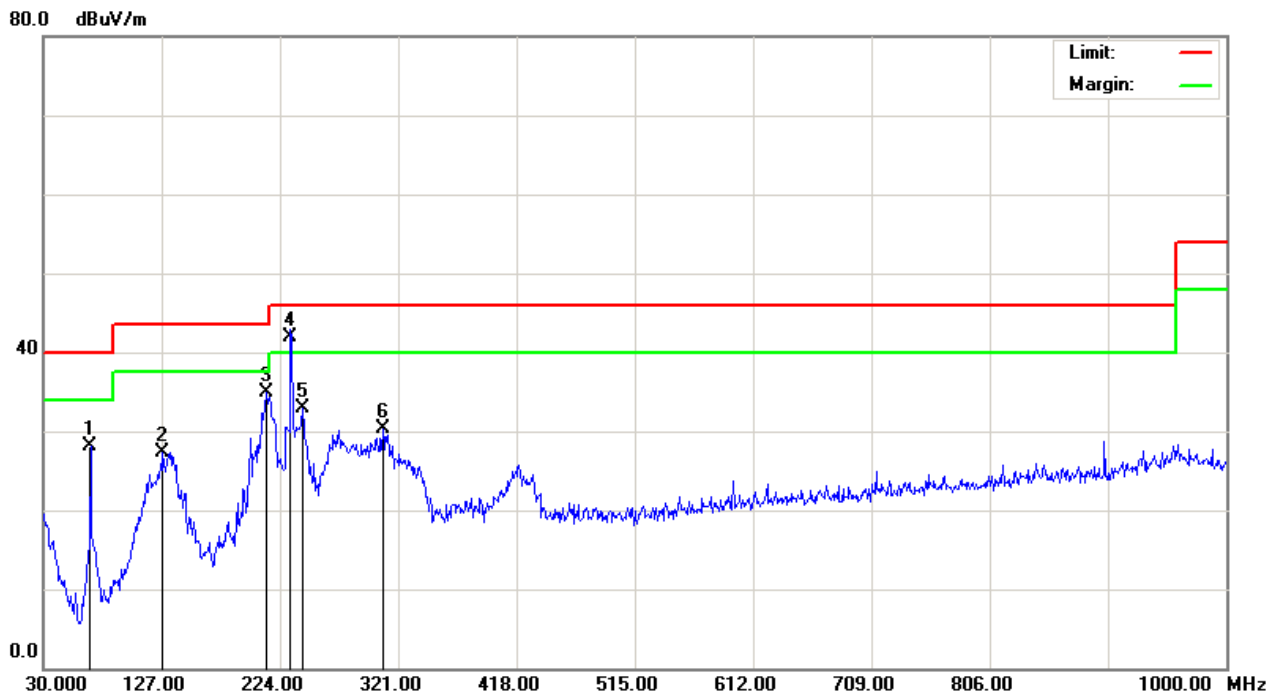Figure 2: Radiated Emission; 30 – 1000 MHz
Horizontal


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F	Remark
1	68.7999	-18.93	47.06	28.13	40.00	-11.87	QP	100	198	P	
2	127.9699	-12.94	40.19	27.25	43.50	-16.25	QP	100	206	P	
3	213.3300	-14.37	49.18	34.81	43.50	-8.69	QP	100	191	P	
4	232.7299	-13.31	55.25	41.94	46.00	-4.06	QP	100	163	P	
5	242.4300	-12.46	45.46	33.00	46.00	-13.00	QP	100	169	P	
6	308.3899	-10.24	40.56	30.32	46.00	-15.68	QP	100	161	P	

Note 1: Level = Reading + Factor


Note 2: Margin = Level - Limit

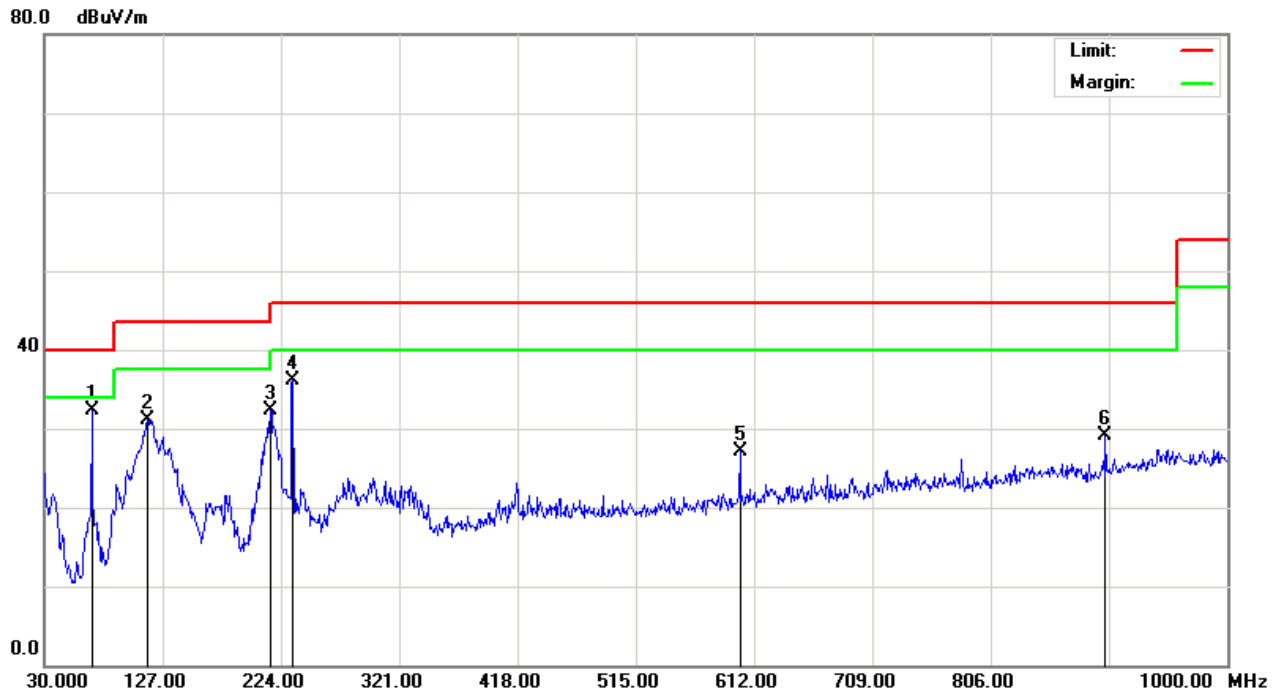Vertical


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F	Remark
1	68.8000	-18.93	51.21	32.28	40.00	-7.72	QP	100	131	P	
2	114.3900	-13.73	44.84	31.11	43.50	-12.39	QP	100	264	P	
3	215.2700	-14.31	46.62	32.31	43.50	-11.19	QP	100	160	P	
4	233.7000	-13.23	49.38	36.15	46.00	-9.85	QP	100	274	P	
5	600.3600	-5.97	33.04	27.07	46.00	-18.93	QP	100	360	P	
6	900.0900	-2.12	31.21	29.09	46.00	-16.91	QP	100	30	P	

Note 1: Level = Reading + Factor


Note 2: Margin = Level - Limit

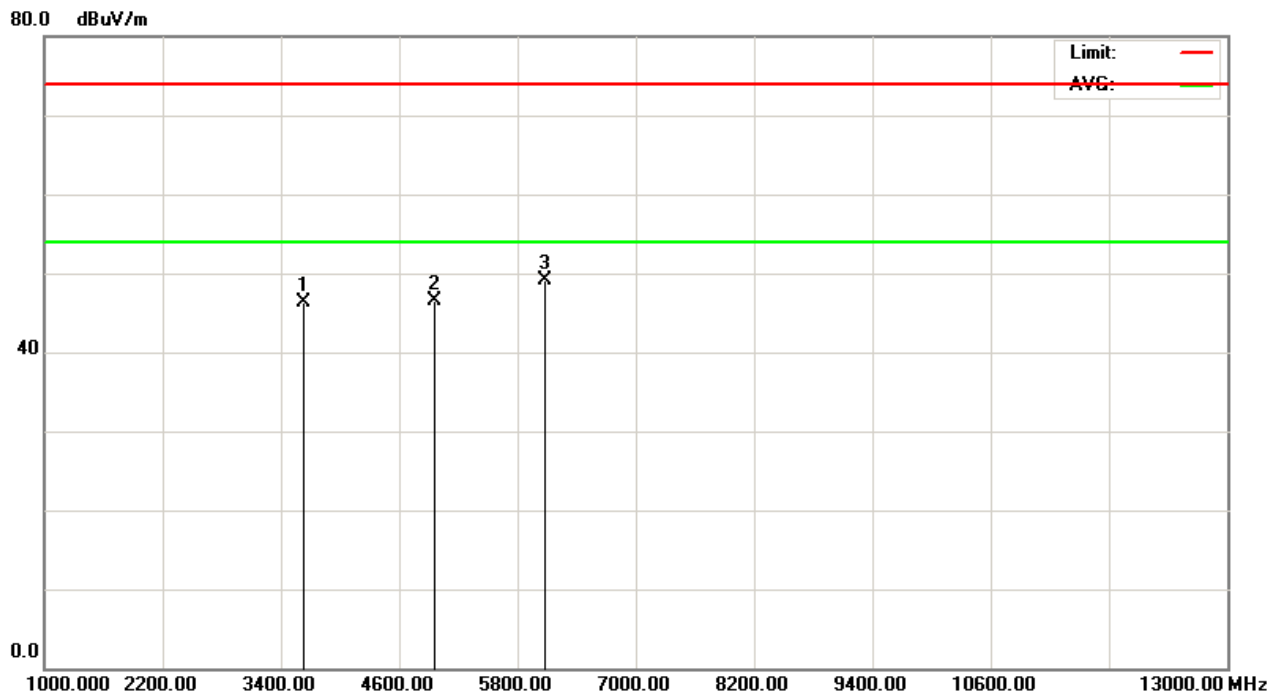Figure 3: Radiated Emission; Above 1 GHz
Horizontal


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F	Remark
1	3634.615	-5.55	51.81	46.26	74.00	-27.74	peak	100	301	P	
2	4961.538	-2.18	48.62	46.44	74.00	-27.56	peak	100	240	P	
3	6076.923	3.98	45.19	49.17	74.00	-24.83	peak	100	123	P	

Note 1: Level = Reading + Factor

Note 2: Margin = Level - Limit

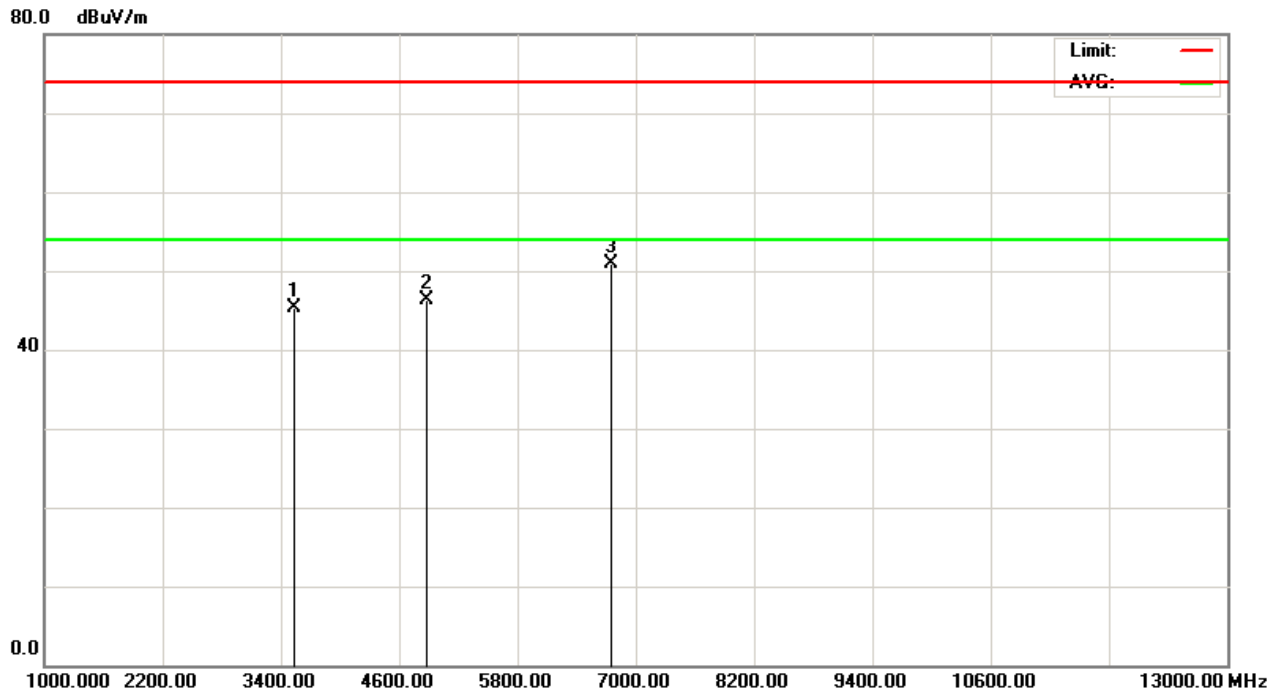Vertical


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (°)	P/F	Remark
1	3538.461	-5.60	50.85	45.25	74.00	-28.75	peak	100	154	P	
2	4884.615	-2.38	48.69	46.31	74.00	-27.69	peak	100	98	P	
3	6750.000	5.17	45.83	51.00	74.00	-23.00	peak	100	85	P	

Note 1: Level = Reading + Factor

Note 2: Margin = Level - Limit

6 Photographs of Test Setup

Picture 1: Conducted Emission, AC Mains; 0.15 – 30 MHz



Picture 2: Radiated Emission, 30 - 1000 MHz



Picture 3: Radiated Emission; Above 1 GHz



7 List of Tables

TABLE 1: LIST OF TEST AND MEASUREMENT EQUIPMENT	5
TABLE 2: MEASUREMENT UNCERTAINTY	6

8 List of Figures



FIGURE 1: CONDUCTED EMISSION, AC MAINS; 0.15 – 30 MHz	11
FIGURE 2: RADIATED EMISSION; 30 – 1000 MHz	14
FIGURE 3: RADIATED EMISSION; ABOVE 1 GHz	16

9 List of Pictures

PICTURE 1: CONDUCTED EMISSION, AC MAINS; 0.15 – 30 MHz	18
PICTURE 2: RADIATED EMISSION, 30 - 1000 MHz	19
PICTURE 3: RADIATED EMISSION; ABOVE 1 GHz	20



Product: 802.11b/g/n 1T1R WLAN Module

Type Designation: WFUR7

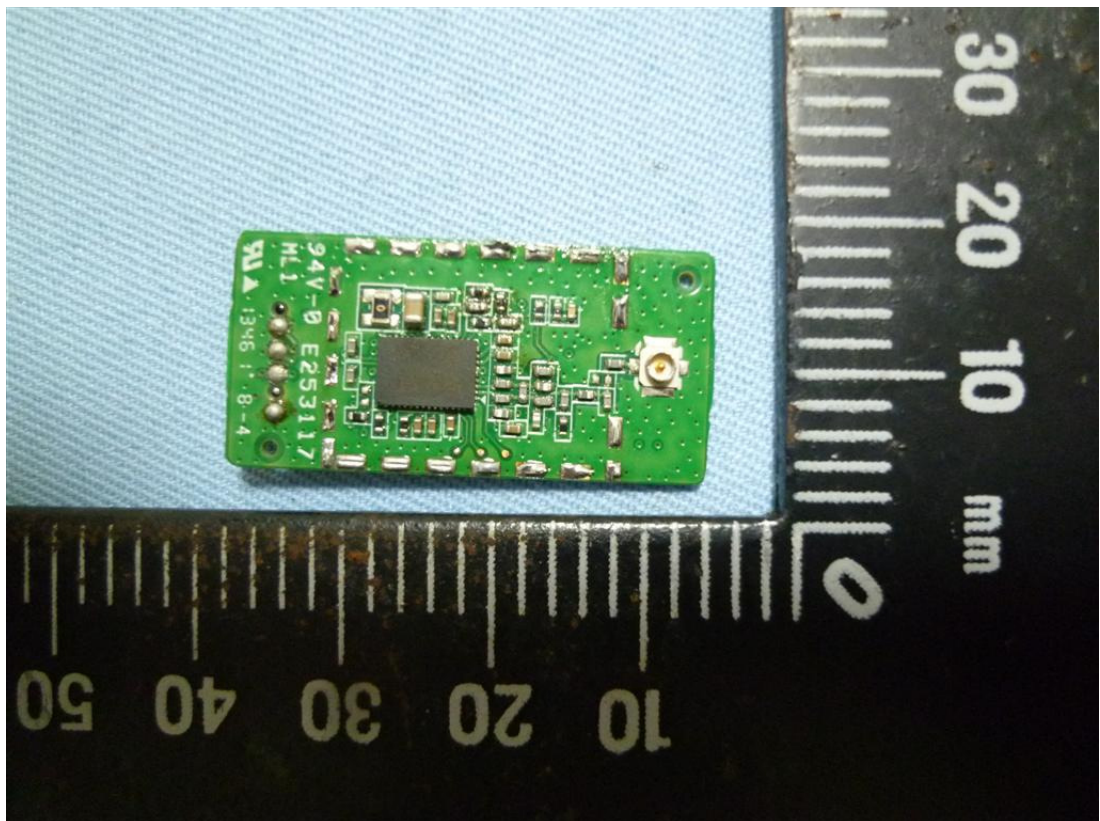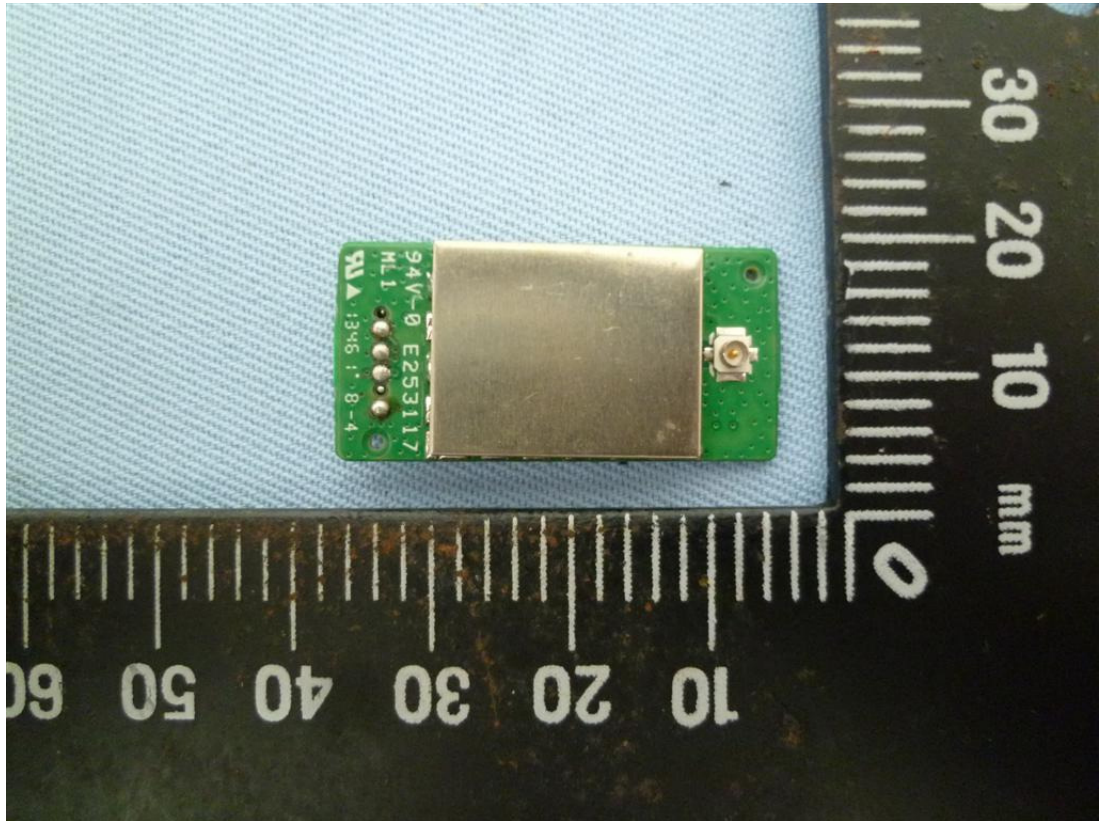

Product: 802.11b/g/n 1T1R WLAN Module

Type Designation: WFUR7

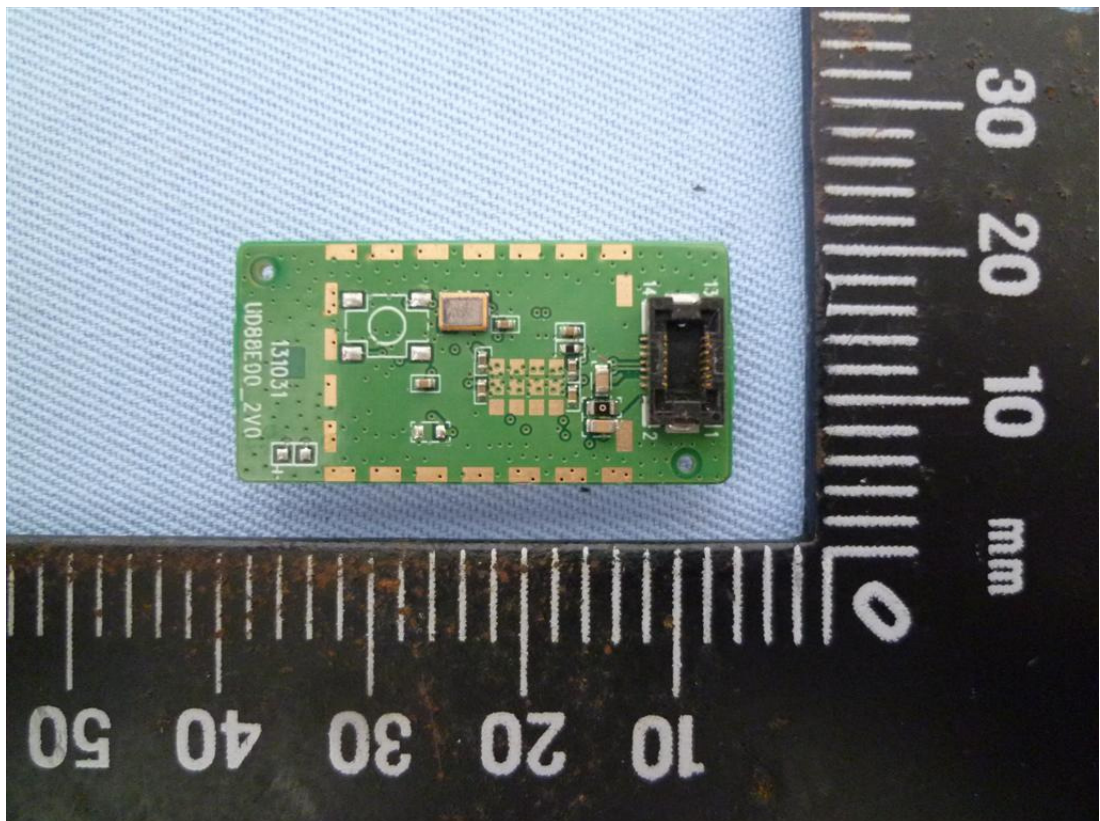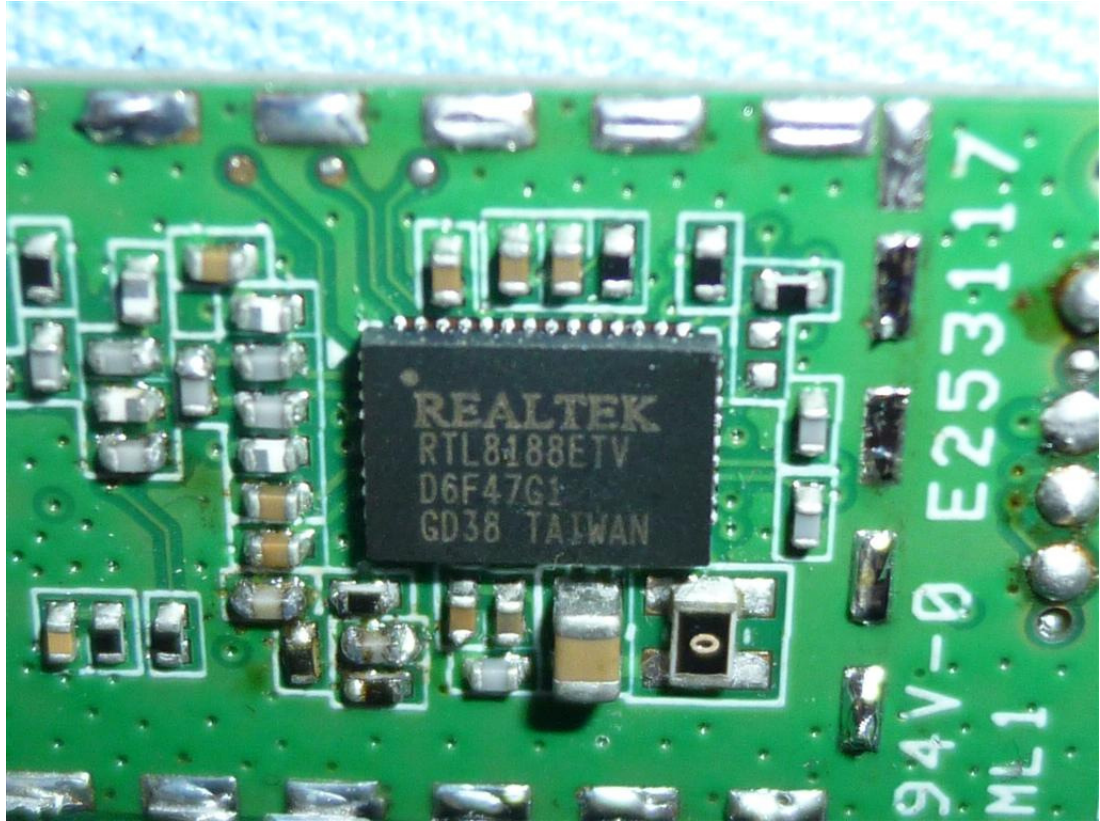

Product: 802.11b/g/n 1T1R WLAN Module

Type Designation: WFUR7

