


Appendix B

Output Power


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

EUT: FLYING SAUCER / Transmitter
Model: FLYING SAUCER NO.1
Approval Holder: GUANGZHOU WALKERA TECHNOLOGY CO., LTD.
Operating Condition: Tnom: 23°C / Unom: 9.0 V DC (battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.227, peak detector
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 27.144MHz, Emax: 78.82dBµV/m, RBW: 10kHz

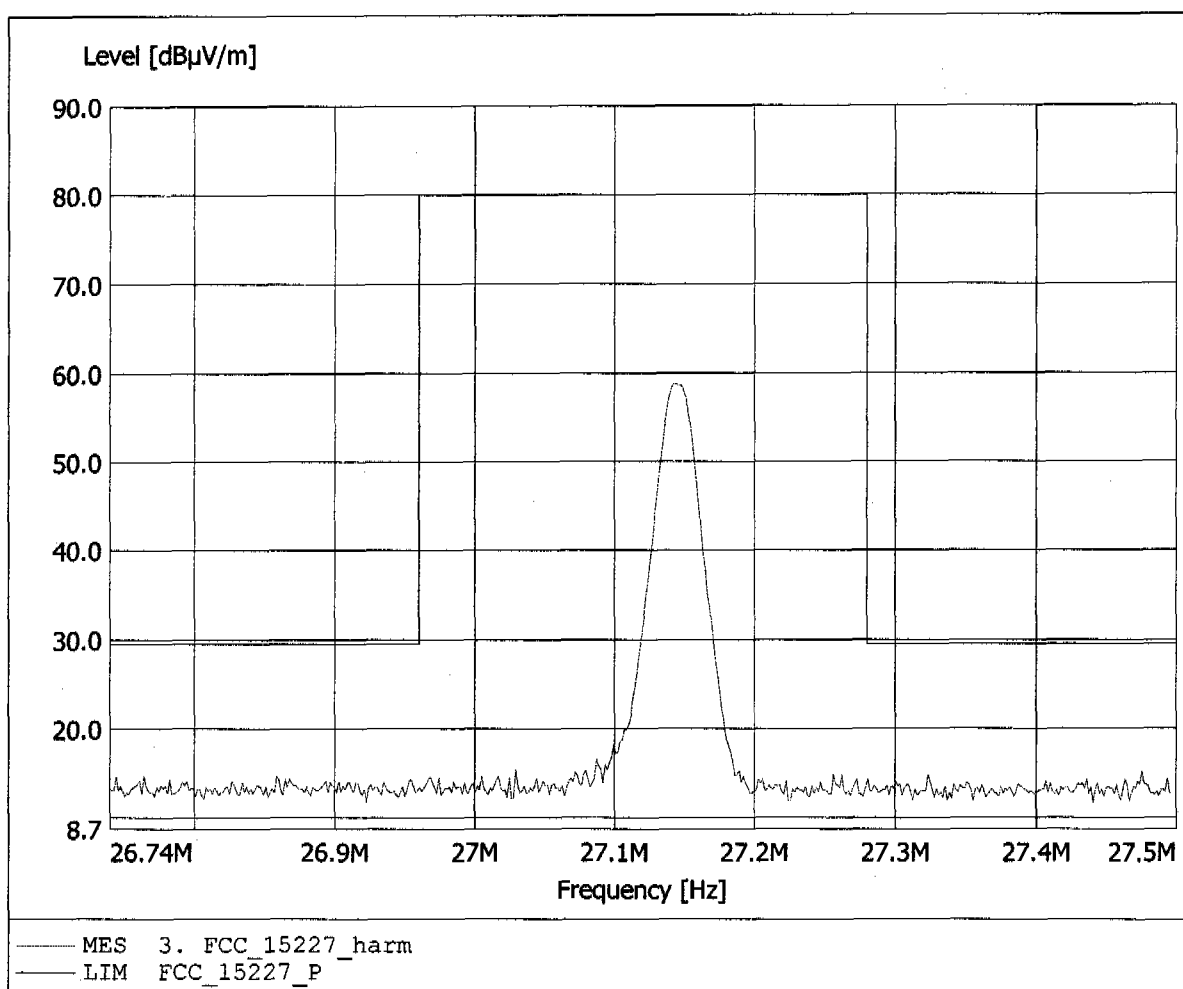

Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

EUT: FLYING SAUCER / Transmitter
Model: FLYING SAUCER NO.1
Approval Holder: GUANGZHOU WALKERA TECHNOLOGY CO., LTD.
Operating Condition: Tnom: 23°C / Unom: 9.0 V DC (battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.227, peak detector
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 27.144MHz, Emax: 78.82dBµV/m, RBW: 10kHz

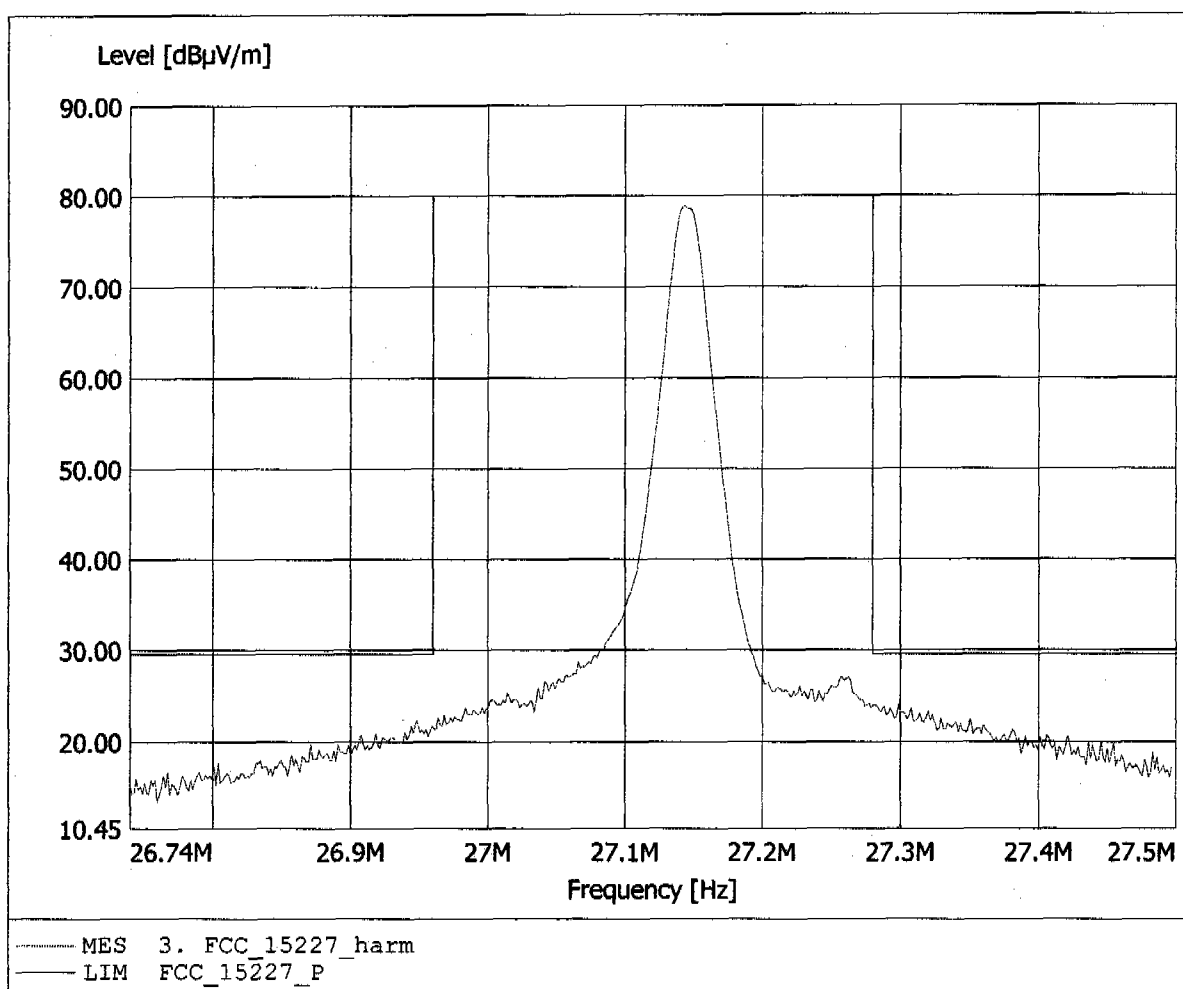


Appendix C

Spurious Emissions radiated, Transmitter


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT: FLYING SAUCER / Transmitter
Model: FLYING SAUCER NO.1
Approval Holder: GUANGZHOU WALKERA TECHNOLOGY CO., LTD.
Operating Condition: Tnom: 23°C / Unom: 9.0 V DC (battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.227, peak detector
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 197.615MHz, Emax: 29.88dBµV/m, RBW: 10kHz-100kHz

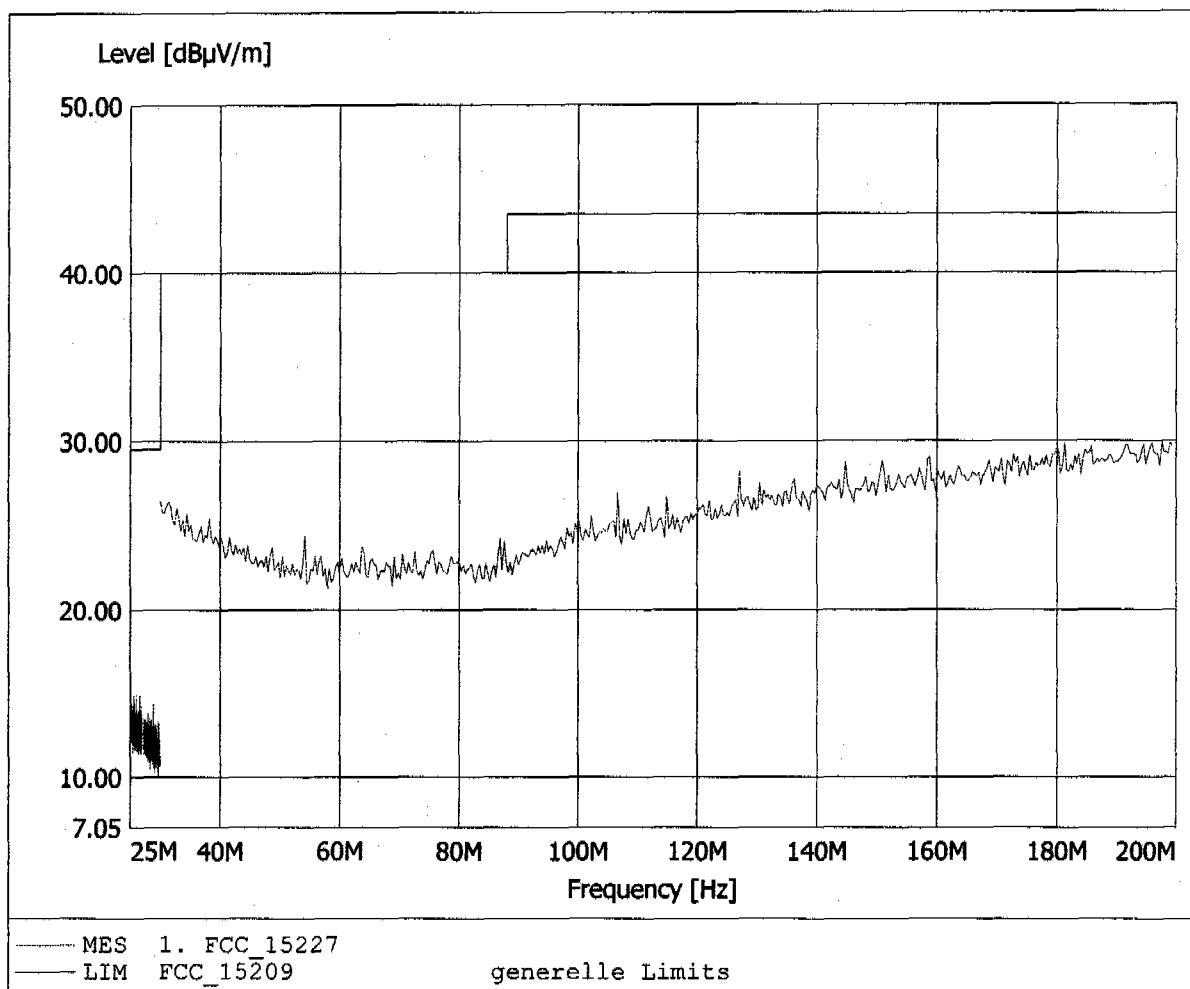


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT: FLYING SAUCER / Transmitter
Model: FLYING SAUCER NO.1
Approval Holder: GUANGZHOU WALKERA TECHNOLOGY CO., LTD.
Operating Condition: Tnom: 23°C / Unom: 9.0 V DC (battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.227, peak detector
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 197.615MHz, Emax: 29.88dBuV/m, RBW: 10kHz-100kHz

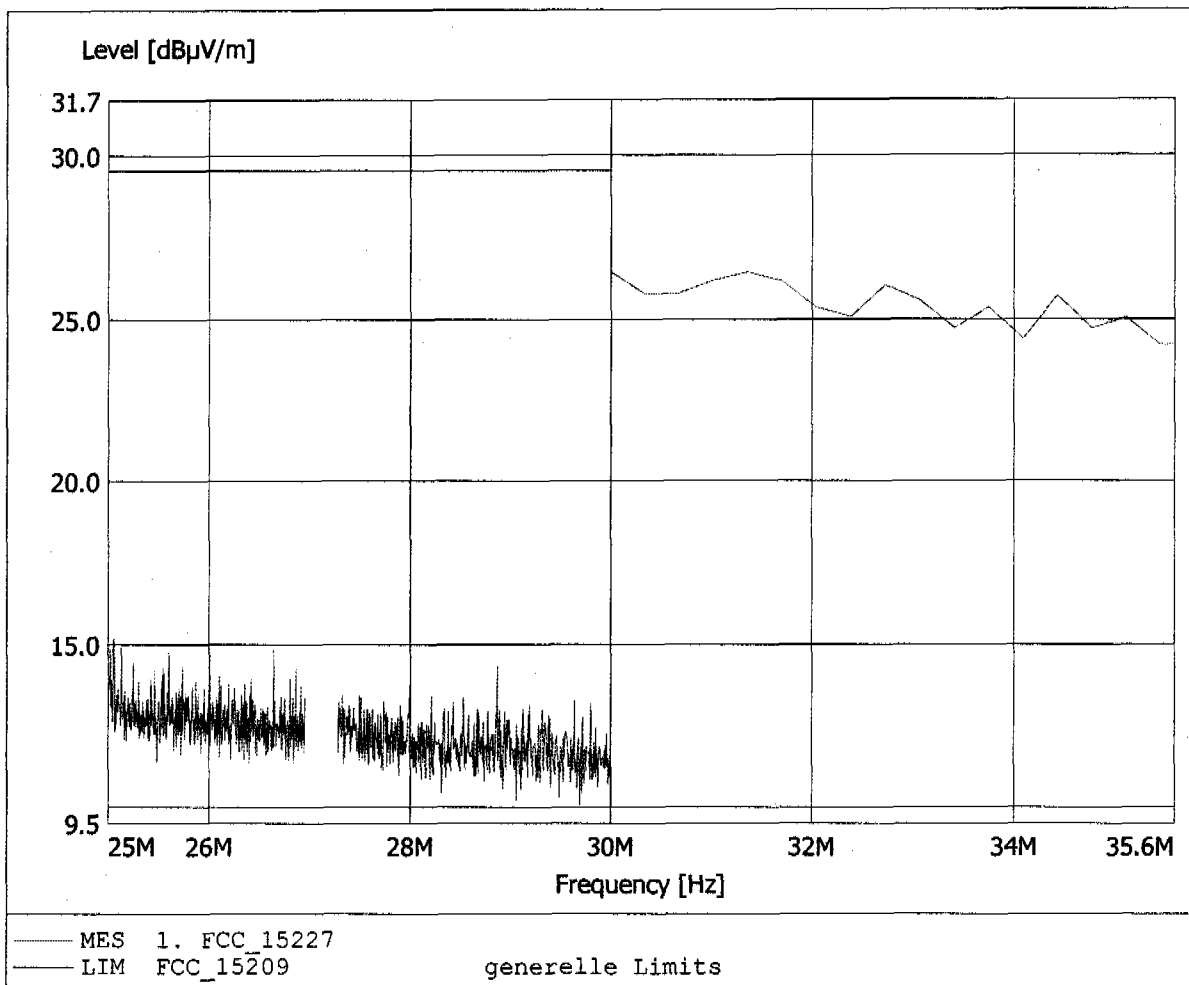


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT: FLYING SAUCER / Transmitter
Model: FLYING SAUCER NO.1
Approval Holder: GUANGZHOU WALKERA TECHNOLOGY CO., LTD.
Operating Condition: Tnom: 23°C / Unom: 9.0 V DC (battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.227, peak detector
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 54.188MHz, Emax: 35.35dBµV/m, RBW: 10kHz-100kHz

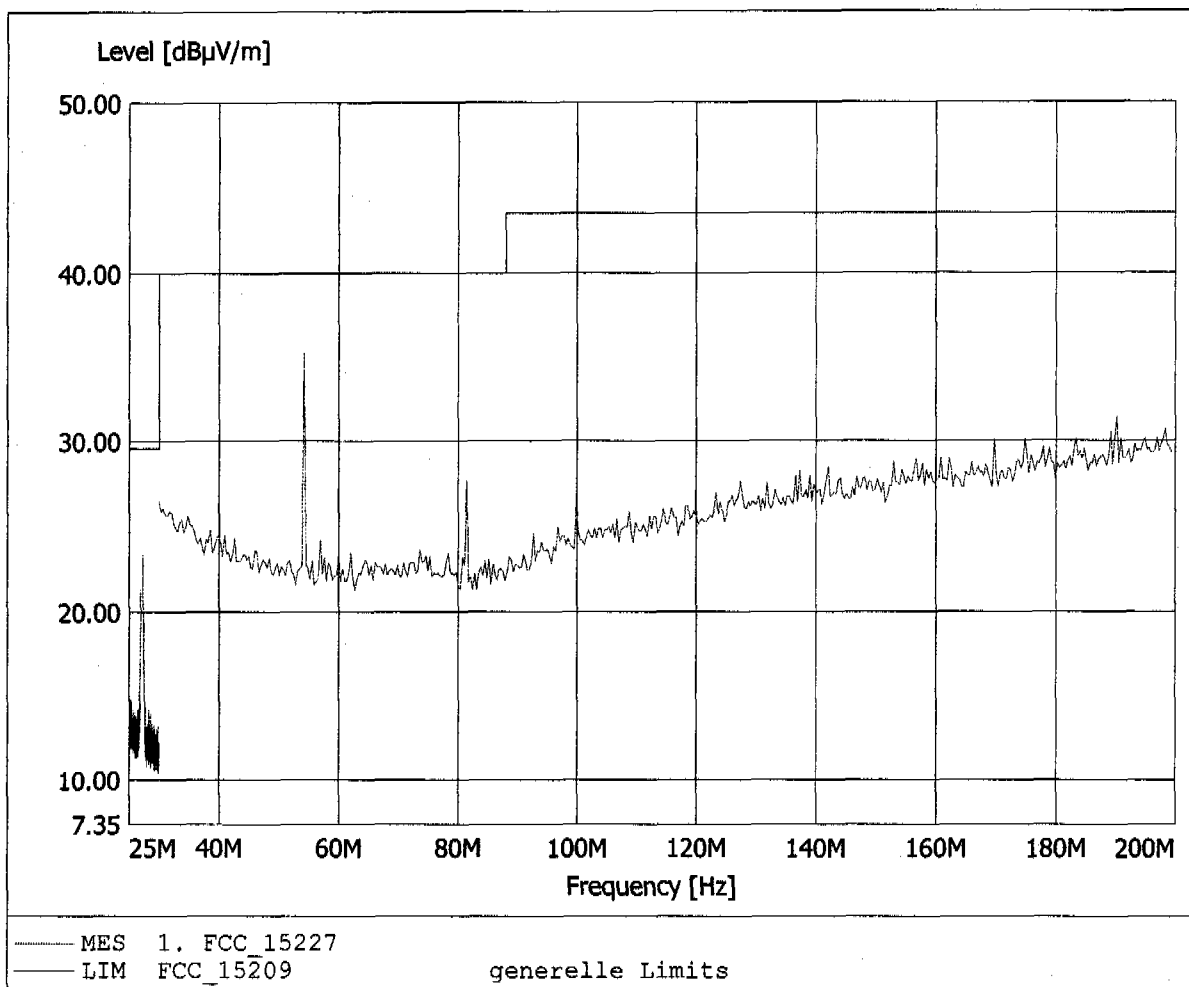


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT: FLYING SAUCER / Transmitter
Model: FLYING SAUCER NO.1
Approval Holder: GUANGZHOU WALKERA TECHNOLOGY CO., LTD.
Operating Condition: Tnom: 23°C / Unom: 9.0 V DC (battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.227, peak detector
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 54.188MHz, Emax: 35.35dBµV/m, RBW: 10kHz-100kHz

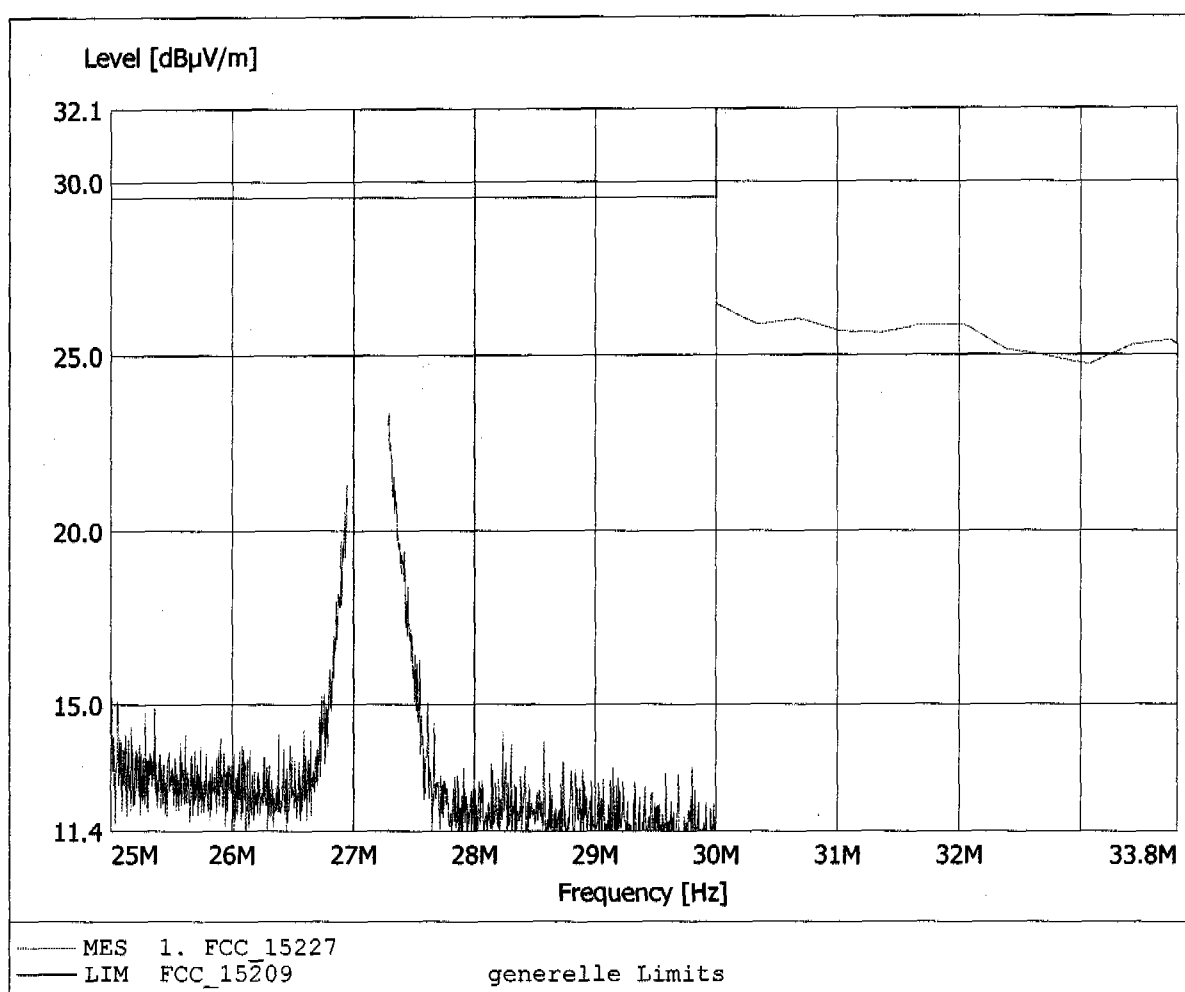


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT: FLYING SAUCER / Transmitter
Model: FLYING SAUCER NO.1
Approval Holder: GUANGZHOU WALKERA TECHNOLOGY CO., LTD.
Operating Condition: Tnom: 23°C / Unom: 9.0 V DC (battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.227, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 963.126MHz, Emax: 21.53dBµV/m, RBW: 100kHz

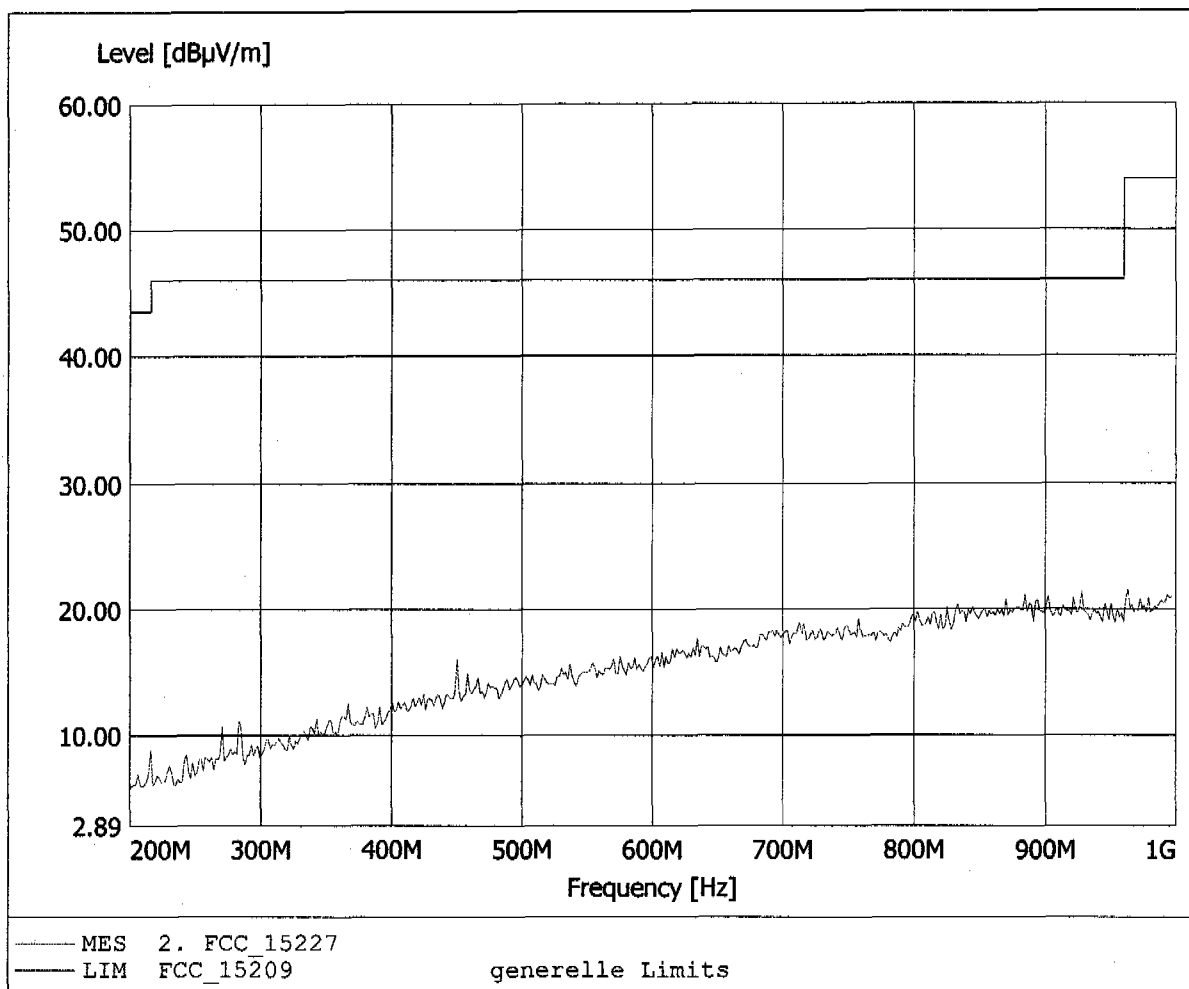

Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT: FLYING SAUCER / Transmitter
Model: FLYING SAUCER NO.1
Approval Holder: GUANGZHOU WALKERA TECHNOLOGY CO., LTD.
Operating Condition: Tnom: 23°C / Unom: 9.0 V DC (battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.227, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 900.601MHz, Emax: 22.33dBμV/m, RBW: 100kHz

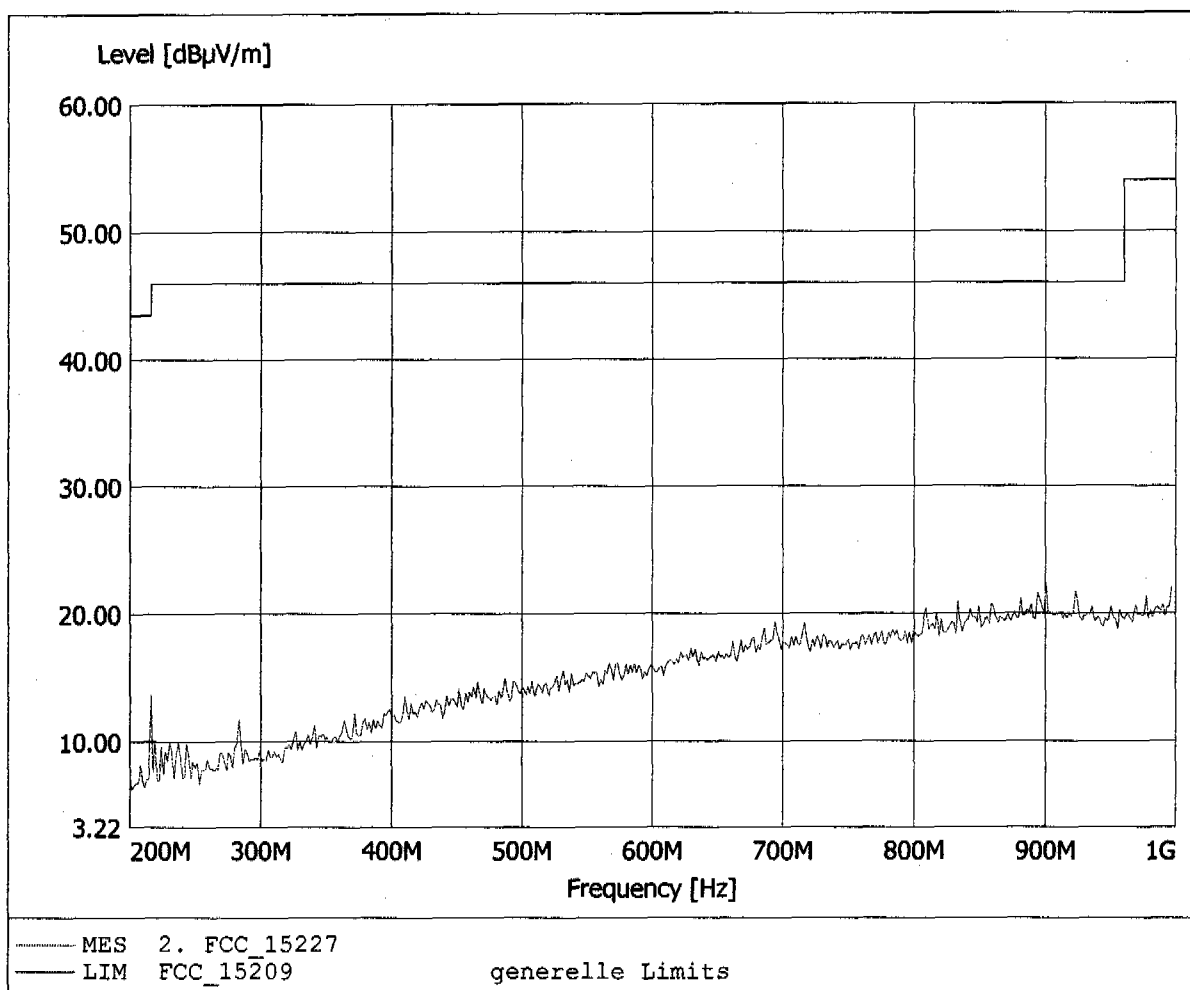

Appendix D

Bandwidth


Test not required

Appendix E

Spurious Emissions radiated, Receiving


Field Strength under normal conditions
FCC RULES PART 15, SUBPART B

EUT: FLYING SAUCER / Receiver
Model: FLYING SAUCER NO.1
Approval Holder: GUANGZHOU WALKERA TECHNOLOGY CO., LTD.
Operating Condition: Tnom: 23°C / Unom: 7.2 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15109
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:198.637MHz Emax:30.54dBμV/m RBW: 100 kHz

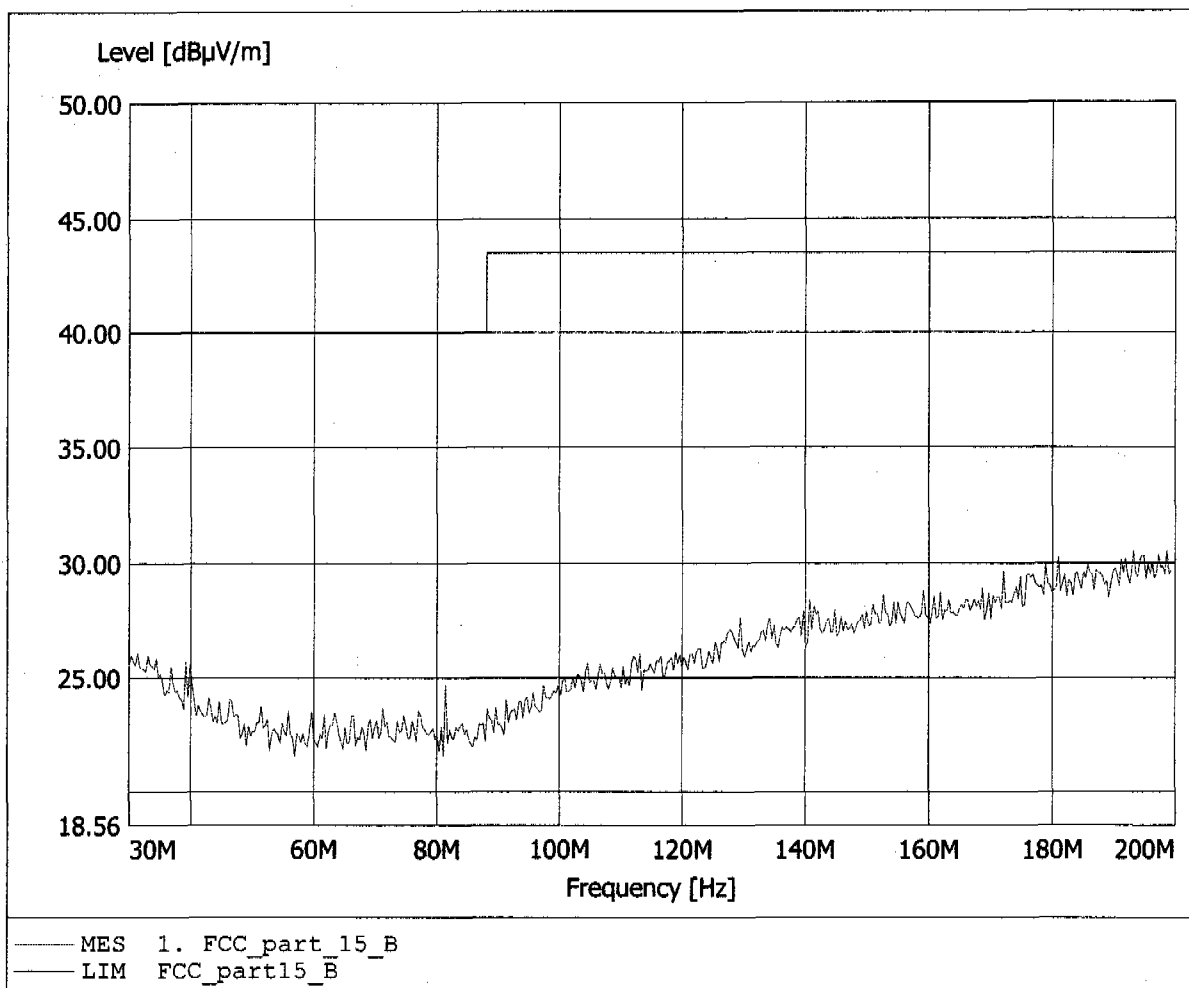


Field Strength under normal conditions
FCC RULES PART 15, SUBPART B

EUT: FLYING SAUCER / Receiver
Model: FLYING SAUCER NO.1
Approval Holder: GUANGZHOU WALKERA TECHNOLOGY CO., LTD.
Operating Condition: Tnom: 23°C / Unom: 7.2 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15109
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:186.373MHz Emax:30.71dBμV/m RBW: 100 kHz

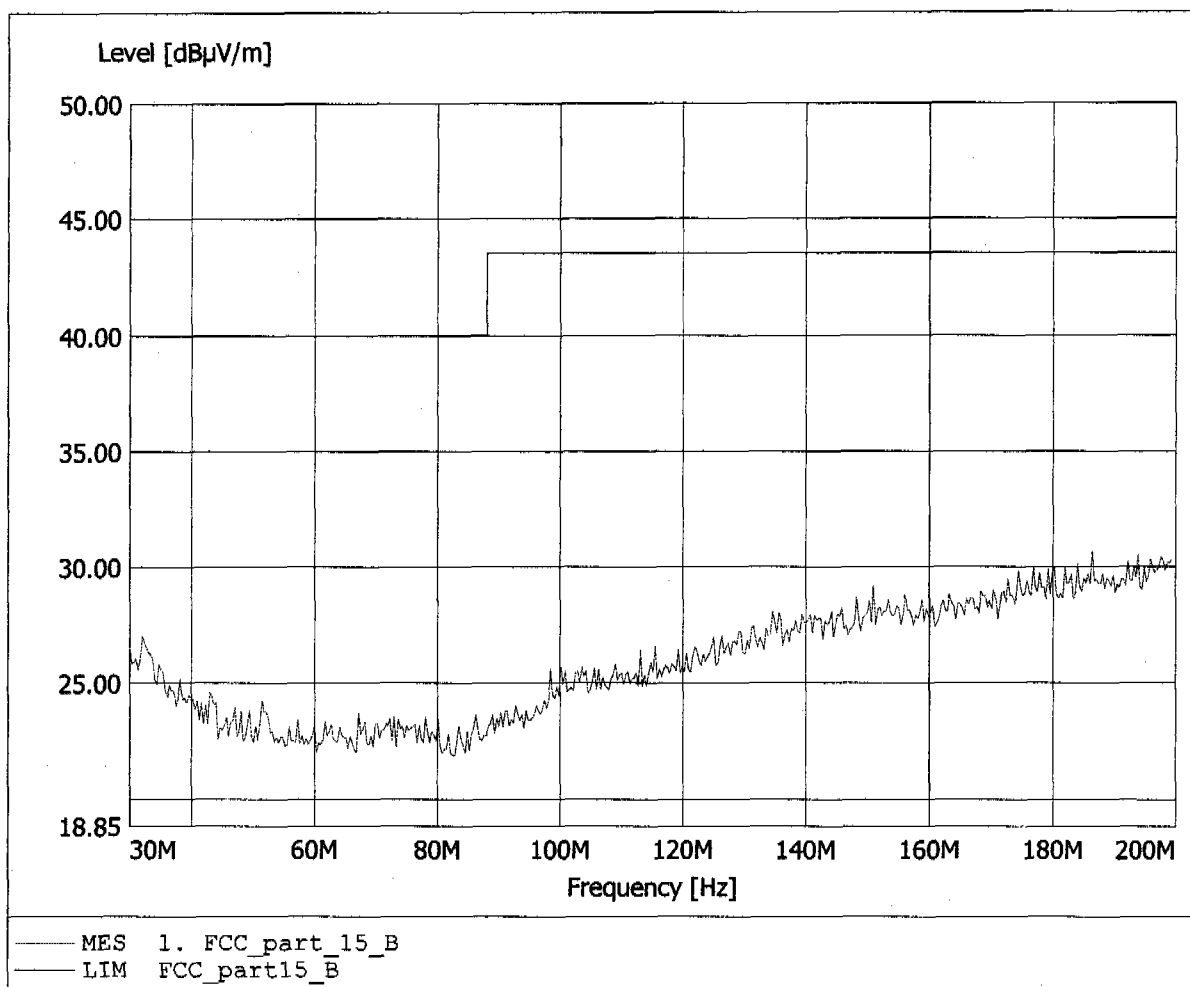


Field Strength under normal conditions
FCC RULES PART 15, SUBPART B

EUT: FLYING SAUCER / Receiver
Model: FLYING SAUCER NO.1
Approval Holder: GUANGZHOU WALKERA TECHNOLOGY CO., LTD.
Operating Condition: Tnom: 23°C / Unom: 7.2 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15109
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq:900.601MHz Emax:21.28dBμV/m RBW: 100 kHz

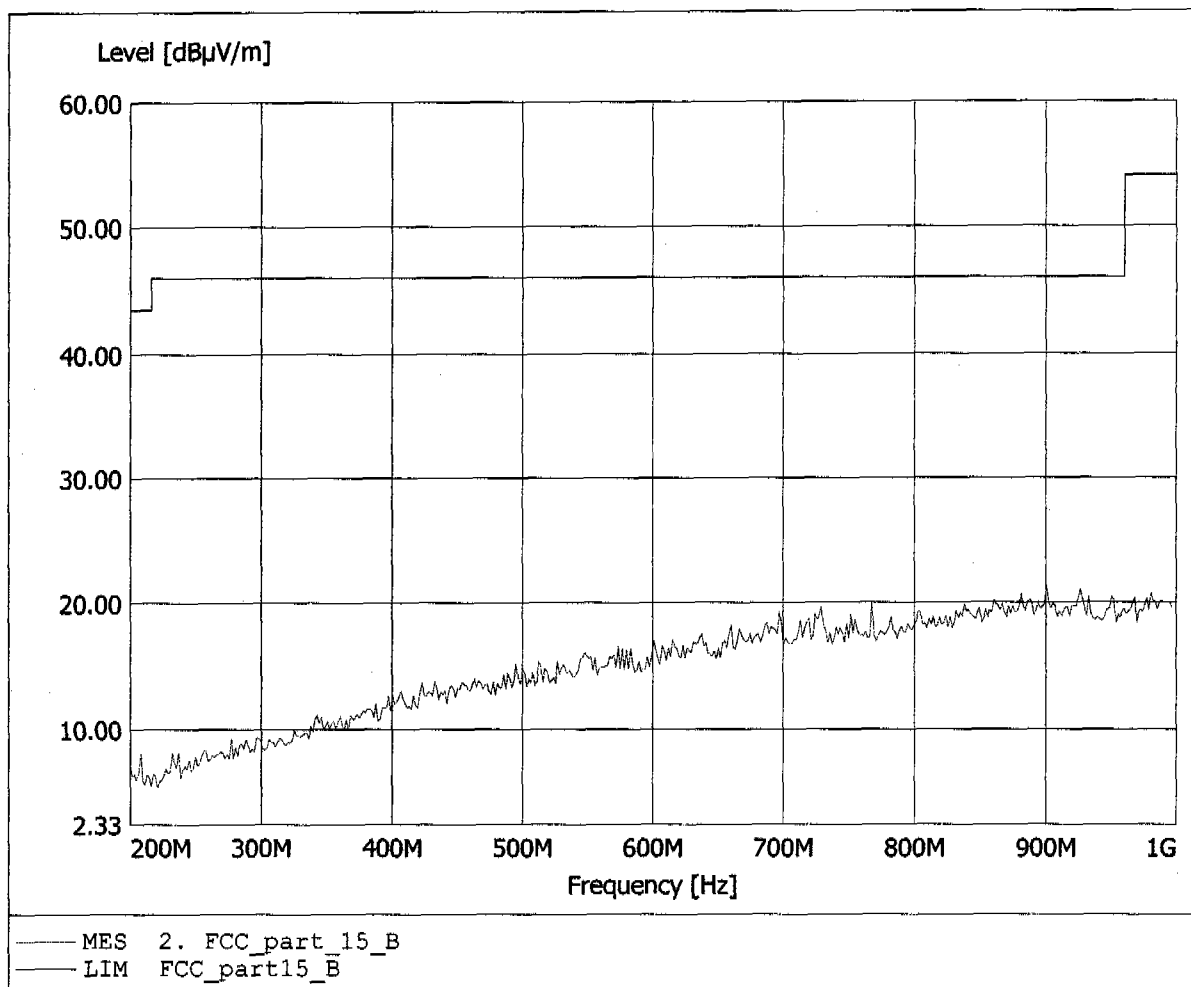

Field Strength under normal conditions
FCC RULES PART 15, SUBPART B

EUT: FLYING SAUCER / Receiver
Model: FLYING SAUCER NO.1
Approval Holder: GUANGZHOU WALKERA TECHNOLOGY CO., LTD.
Operating Condition: Tnom: 23°C / Unom: 7.2 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.109
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 988.778MHz Emax: 21.21dBµV/m RBW: 100 kHz

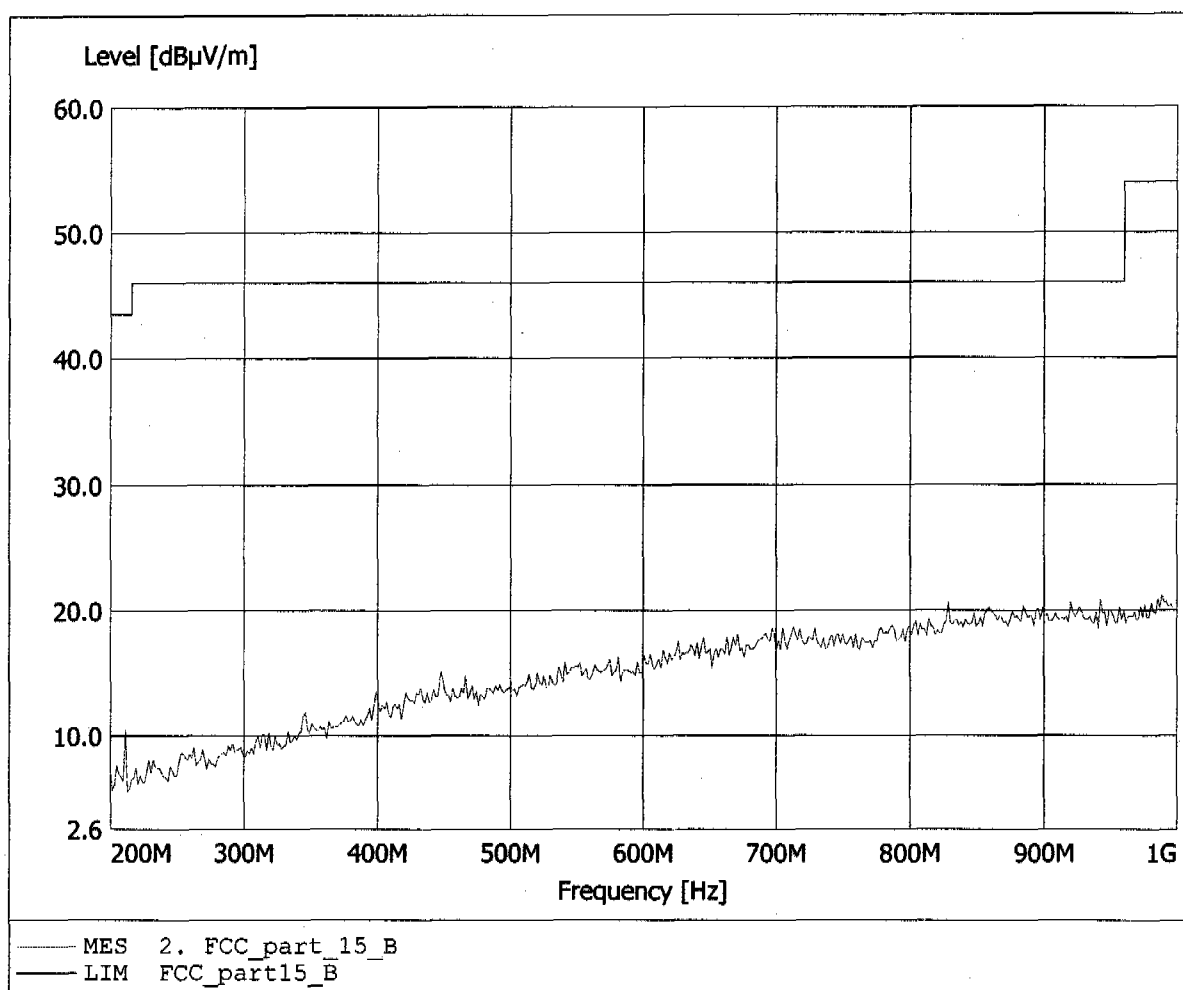

Appendix F

Conducted Measurement at (AC) Power Line

EMI voltage test in the ac-mains according to FCC part 15

EUT: FLYING SAUCER
Manufacturer: GUANGZHOU WALKERA TECHNOLOGY CO.
Operating Condition: Unom: 120 V AC, Tnom: 23°C
Test Site: ETS
Operator: Mr. Jahn
Test Specification: V-Network: ESH2-Z5 (L1)
Comment: model: FLYING SAUCER NO. 1 mode: charging
AC/DC-Adapter RadioShack No. 273-1773

