
REPORT ON

FCC CFR 47: Parts 15 and 24 Testing in support of an
Application for Grant of Equipment Authorisation
of a Maxon Telecom Co. Ltd. MX-V30 Tri-Band Mobile Handset

COMMERCIAL-IN-CONFIDENCE

FCC ID: RXUMX-V30

Report No OR612478/01 Issue 2

July 2004

REPORT ON

FCC CFR 47: Parts 15 and 24 Testing in support of an Application for Grant of Equipment Authorisation of a Maxon Telecom Co. Ltd. MX-V30 Tri-Band Mobile Handset

FCC ID: RXUMX-V30

Report No OR612478/01 Issue 2

July 2004

PREPARED FOR

Maxon Telecom Co. Ltd.
10F Sewon Venture Town Bldg.
705-18, Yeoksam-dong
Kangnam-gu
Seoul, 135-080
Korea

PREPARED BY


R Small
Telecoms Engineer

APPROVED BY


K Adsetts
UKAS EMC Signatory


M Jenkins
UKAS Radio Signatory

DATED

28th July 2004

DISTRIBUTION

Maxon Telecom Co. Ltd.

Copy 1

BABT

Copy 2

Copy No 1

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47: Parts 15 and 24. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineers:


R Small




S Hartley



CONTENTS

Section		Page No
1	REPORT SUMMARY	
1.1	Status.....	4
1.2	Introduction	5
1.3	Brief Summary of Results.....	5
1.4	Opinions and Interpretations	6
1.5	Product information	7
1.6	Test Conditions (Configuration).....	7
1.7	Deviations from the Standard.....	7
1.8	Modification Record.....	7
2	TEST DETAILS	
2.1	Maximum Peak Output Power (Conducted).....	9
2.2	Maximum Peak Output Power (Radiated).....	11
2.3	Modulation Characteristics.....	13
2.4	Occupied Bandwidth	17
2.5	Spurious Emissions At Antenna Terminals (+/- 1MHz).....	20
2.6	Radiated Emissions.....	54
2.7	Conducted Emissions On Power Lines.....	61
2.8	Conducted Spurious Emissions	65
2.9	Frequency Stability Under Temperature Variation.....	108
2.10	Frequency Stability Under Voltage Variation	110
3	TEST EQUIPMENT USED	
3.1	Table of Test Equipment Used	113
3.2	Measurement Uncertainty	114
4	EUT PHOTOGRAPHS	
4.1	List of EUT Photographs	116
5	ACCREDITATION, DISCLAIMERS AND COPYRIGHT	
5.1	Accreditation, Disclaimers and Copyright.....	121
APPENDICES		
A	Titchfield FCC Site Compliance Letter	123



SECTION 1

REPORT SUMMARY

FCC CFR 47: Part 15 and 24 Testing in support of an
Application for Grant of Equipment Authorisation
of a Maxon Telecom Co. Ltd. MX-V30 Tri-Band Mobile Handset



1.1 STATUS

EQUIPMENT UNDER TEST	MX-V30 Tri-Band Mobile Handset
OBJECTIVE	To undertake measurements to determine the Equipment Under Test's (EUT's) compliance with the specification.
NAME AND ADDRESS OF CLIENT	Maxon Telecom Co. Ltd.
TYPE NUMBER	MX-V30
SERIAL NUMBER	352902-00-000069-6
HARDWARE VERSION	V2.3.1
SOFTWARE VERSION	000.00.000
TEST SPECIFICATION / ISSUE / DATE	FCC CFR 47: Part 15, Subparts B and C, August 2002, and Part 24, Subpart E, January 2001
NUMBER OF ITEMS TESTED	One
SECURITY CLASSIFICATION OF EUT	Commercial In Confidence
DISPOSAL	Held pending disposal
REFERENCE NUMBER	Not Applicable
DATE	Not Applicable
ORDER NUMBER	TCMD0440124
DATE	26th April 2004
START OF TEST	26th April 2004
FINISH OF TEST	30th April 2004
RELATED DOCUMENTS	ANSI C63.4 2001. Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz. FCC Public Notice document (DA 00-705 released 30 March 2000)



1.2 INTRODUCTION

The information contained within this report is intended to show limited verification of compliance of the Maxon Telecom Co. Ltd. MX-V30 to the requirements of FCC Specification Part 24.

Testing was carried out in support of an application for Grant of Equipment Authorisation in the name of Maxon Telecom Co. Ltd.

1.3 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out is shown below.

Test	Spec Clause	Test Description	Result	Comments
2.1	2.1046, 24.232	Maximum Peak Output Power	PASS	-
2.2	2.1046, 24.232	Maximum Peak Output Power	PASS	-
2.3	2.1047(d)	Modulation Characteristics	PASS	-
2.4	2.1049, 24.238(b)	Occupied Bandwidth	PASS	-
2.5	2.1049, 24.229	Band Edge Measurements	PASS	-
2.6	2.1053, 15.109 and 24.238	Radiated Spurious Emissions	PASS	-
2.7	15.207	Conducted Emissions on Power Lines	PASS	-
2.8	2.1051, 24.238(a)	Conducted Spurious Emissions	PASS	-
2.9	2.1055, 24.135(a)	Frequency Stability Under Temperature Variations	PASS	-
2.10	24.135 (a)	Frequency Stability Under Voltage Variations	PASS	-



1.4 OPINIONS AND INTERPRETATIONS

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.



1.5 PRODUCT INFORMATION

1.5.1 Technical Description

The Maxon MX-V30 Tri Band Mobile Handset operates from a 3.8 volt battery. At 1900MHz it is Power Class 1, operating with a maximum output power of 1 watt.

1.5.2 Modes of Operation

Modes of operation of the EUT during testing were as follows:

Applicable testing was carried out with the EUT transmitting at maximum power or receiving as detailed in Section 1.5.3.

1.5.3 Test Mode 1: PCS1900MHz Transmitting on the following channels and frequencies;

Bottom Channel 512: 1850.2MHz

Middle Channel 661: 1880.0MHz

Top Channel 810: 1909.8MHz

1.6 TEST CONDITIONS

For Radiated Spurious Emissions testing, the EUT was set-up simulating a typical user installation on the Alternative Open Field Test Site identified in Appendix A, and tested in accordance with the applicable specification.

For all tests, the Maxon MX-V30 was powered by its own internal battery.

1.7 DEVIATIONS FROM THE STANDARD

Not Applicable

1.8 MODIFICATION RECORD

Not Applicable



SECTION 2

TEST DETAILS

FCC CFR 47: Parts 15 and 24 Testing in support of an
Application for Grant of Equipment Authorisation
of a Maxon Telecom Co. Ltd. MX-V30 Tri-Band Mobile Handset



2.1 MAXIMUM PEAK OUTPUT POWER (CONDUCTED)

2.1.1 FCC CFR 47: Part 24 Subpart E, Section 24.232

2.1.2 Equipment Under Test

MX-V30

2.1.3 Date of Test

29th April 2004

2.1.4 Test Equipment Used (See Section 3.1 for details)

2, 3, 4, 5, 8

2.1.5 Test Procedure

Using a spectrum analyser and attenuator(s), the output power of the EUT was measured at the antenna terminals. The EUT supports both GSM and GPRS. The device is a class 10 mobile. The carrier was modulated by its normal GMSK modulation and measurements performed with TS3 active. In GPRS mode, timeslots 3 and 4 were active.

The spectrum analyser RBW and VBW were set to 1MHz and the path loss measured and entered as a reference level offset.

2.1.6 Test Results

Maximum Power - GSM

Frequency (MHz)	Output Power (dBm)	Path Loss (dB)	Result (dBm)	Result (W)
1850.2	12.4	16.8	29.2	0.83
1880.0	11.8	17.0	28.8	0.76
1909.8	11.8	17.2	29.0	0.79

Minimum Power- GSM

Frequency (MHz)	Output Power (dBm)	Path Loss (dB)	Result (dBm)	Result (mW)
1850.2	-16.08	16.8	0.72	1.18
1880.0	-15.47	17.0	1.53	1.42
1909.8	-13.60	17.2	3.60	2.33

2.1 **MAXIMUM PEAK OUTPUT POWER (CONDUCTED) - Continued**Maximum Power - GPRS

Frequency (MHz)	Output Power (dBm)	Path Loss (dB)	Result (dBm)	Result (W)
1850.2	12.3	16.8	29.1	0.81
1880.0	11.7	17.0	28.7	0.74
1909.8	11.7	17.2	28.9	0.78

Minimum Power- GPRS

Frequency (MHz)	Output Power (dBm)	Path Loss (dB)	Result (dBm)	Result (mW)
1850.2	-15.97	16.8	0.83	1.21
1880.0	-15.51	17.0	1.49	1.41
1909.8	-13.93	17.2	3.27	2.12

Limit	<2W or <+33dBm
-------	----------------

Remarks

EUT complies with CFR 47 2.1046 and 24.232(b). The EUT does not exceed 2W or +33dBm at the measured frequencies.



2.2 MAXIMUM PEAK OUTPUT POWER (RADIATED)

2.2.1 FCC CFR 47: Part 24 Subpart E, Section 24.232

2.2.2 Equipment Under Test

MX-V30

2.2.3 Date of Test

26th April 2004

2.2.4 Test Equipment Used (See Section 3.1 for details)

Items 13, 14, 15, 16, 17, 18, 19, 20, 21, 22

2.2.5 Test Procedure

Test Performed in accordance with ANSI C63.4.

The EUT has an Integral antenna, therefore the Maximum Peak Output Power (EIRP) was made using the Radiated method.

The Spectrum Analyser was tuned to the test frequency. The device Output Power setting was controlled as specified in the Product Information, Section 1.5 of this document. The device was then rotated through 360 degrees, and the measuring antenna height searched (1m – 4m) until the highest power level was observed in both horizontal and vertical polarisation. The device was then replaced with a substitution antenna, whose input signal to the antenna was adjusted until the received level matched that of the previously detected emission.

2.2.6 Test Results

Measurements were made with the EUT in PCS 1900MHz.

The EUT met the requirements of FCC Part 24, Section 24.232, Power and Antenna Height Limits.

Frequency (MHz)	Raw Result (dBm)	Substitution Level (dBm)	Substitution Antenna Gain (dB)	Result EIRP (dBm)	EIRP Limit (dBm)	Result EIRP (W)
1850.2	-9.4	23.6	8.7	32.3	33.0	1.698
1880.0	-10.1	23.5	8.7	32.2	33.0	1.660
1909.8	-12.2	21.5	8.7	30.2	33.0	1.047



2.2 MAXIMUM PEAK OUTPUT POWER - continued

2.2.7 Set Up Photograph



Maximum Peak Output Power Set Up Photograph



2.3 MODULATION CHARACTERISTICS

2.3.1 FCC CFR 47: Section 2.1047(d)

2.3.2 Equipment Under Test

MX-V30

2.1.3 Date of Test

29th April 2004

2.1.4 Test Equipment Used (See Section 3.1 for details)

2, 3, 4, 5, 8

2.3.5 Modulation Data supplied by Maxon.

The system is designed to meet the PCS requirements as defined in the 3GPP specifications: 3GPP TS 05:01, TS 05:02 and TS 05:04 are the most relevant. To summarize the system uses time division multiplexed access (TDMA) to separate eight users on a channel and frequency multiplexing for the up and down links.

There are 299 channels on a 200kHz raster. The frequency band 1930~1990MHz is allocated to the downlink and 1850~1910MHz to the uplink. The duplex frequency is 80MHz and the up and down link is offset in time by three TDMA slots.

The bit rate is 13MHz/48 (~270.833kHz). There are 1250 bits in a frame that contains the eight slots; one of which is allocated to each user. Therefore each slot is 156.25 bits in length and lasts ~577μs. To allow control information to be interleaved amongst the user data there is a larger data unit comprising 26 frames called a multi-frame. The existence of the multi-frame and the associated timing allows extra protection against data corruption by interleaving frames.

The modulation described by TS 05:04 is a differentially encoded scheme where the data are represented by phase shifts of $\pm\pi/2$ over a bit period. The modulation scheme implemented is Gaussian filtered minimum shift keying (GMSK). Minimum shift keying is a special case of frequency shift keying (FSK) with a modulation index of $h = 0.5$. FSK is a binary modulation scheme with each of the two logical states represented by a different offset from the nominal carrier frequency.

From the well known equation

$$h = 2 * F_p * T_b$$

where h is the modulation index, F_p is the peak frequency deviation and T_b is the bit period the peak frequency deviation is shown to be $\approx \pm 67.7$ kHz.

Minimum shift keying has a relatively wide frequency spectrum. To improve spectral efficiency Gaussian filtering is applied to modulation source resulting in a sinusoidal, rather than instantaneous, transition between the two offset frequencies determined by the modulation data and, therefore, a reduced signal bandwidth. The 3dB bandwidth of the Gaussian filter is 81.25kHz.

A complete description of the modulation and filtering is attached in the following annex.



2.3 MODULATION CHARACTERISTICS - Continued

Annex to Description of Modulation Characteristics

The differentially encoded modulating data values α_i ($\alpha_i \in \{-1, +1\}$) as represented by Dirac pulses excite a linear filter with impulse response at time t defined by:

$$g(t) = h(t) * \text{rect}\left(\frac{t}{T}\right)$$

where T is the bit period and the function $\text{rect}(x)$ is defined by:

$$\text{rect}\left(\frac{t}{T}\right) = \frac{1}{T} \quad \text{for } |t| < \frac{T}{2}$$

$$\text{rect}\left(\frac{t}{T}\right) = 0 \quad \text{otherwise}$$

and $*$ means convolution. $h(t)$ is defined by:

$$h(t) = \frac{\exp\left(\frac{-t^2}{2\delta^2 T^2}\right)}{\sqrt{(2\pi)} \cdot \delta T}$$

where

$$\delta = \frac{\sqrt{\ln(2)}}{2\pi BT} \quad \text{and } BT = 0.3$$

where B is the 3 dB bandwidth of the filter with impulse response $h(t)$.

The phase of the modulated signal is:


$$\varphi(t') = \sum_i \alpha_i \pi h \int_{-\infty}^{t'-iT} g(u) du$$

where the modulating index h is 1/2 (maximum phase change in radians is $\pi/2$ per data interval). The time reference $t' = 0$ is the start of the slot.


The modulated RF carrier is expressed as:

$$x(t') = \sqrt{\frac{2E_c}{T}} \cdot \cos(2\pi f_0 t' + \varphi(t') + \varphi_0)$$


where E_c is the energy per modulating bit, f_0 is the centre frequency and φ_0 is a random phase and is constant during one burst

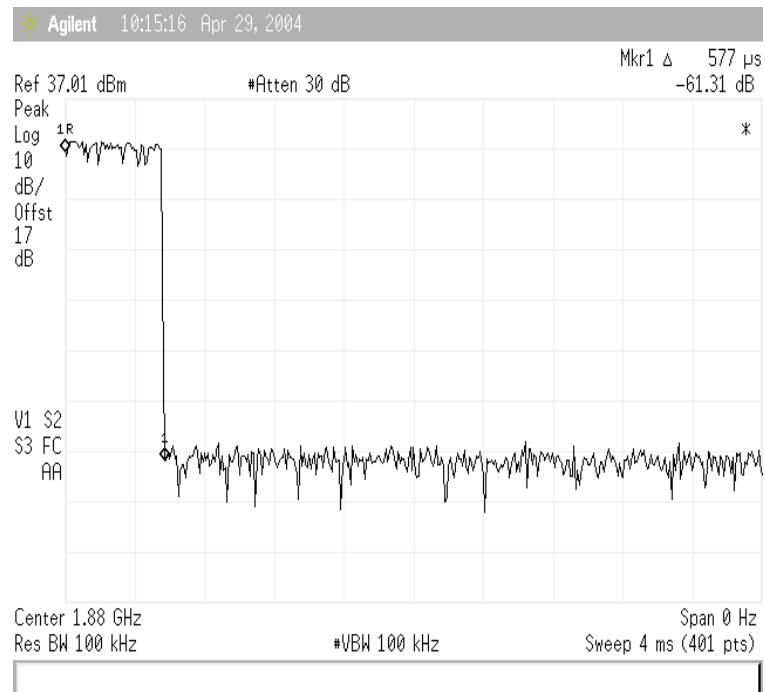


GSM Mode. View of TS3

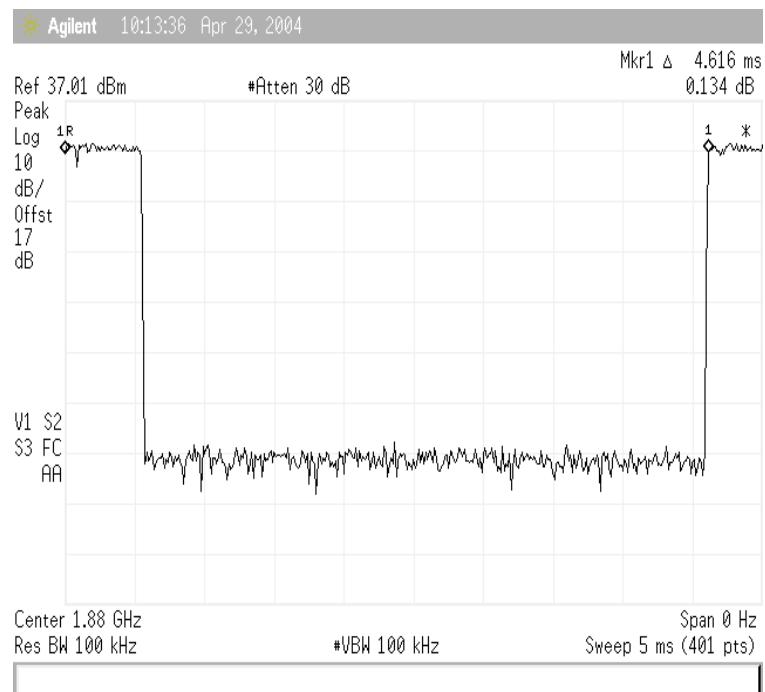

GSM Mode. View of One Complete Frame Showing TS3

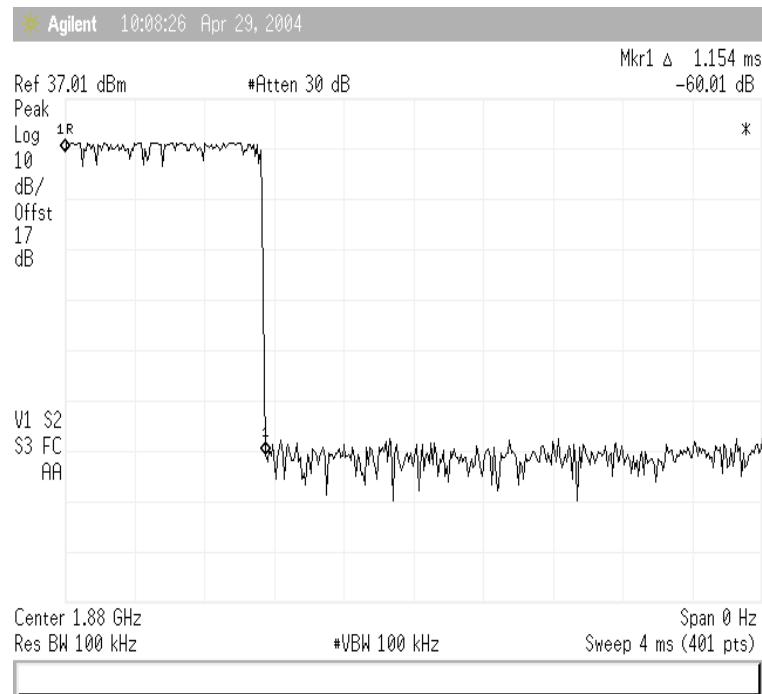

GPRS Mode View of TS3/TS4

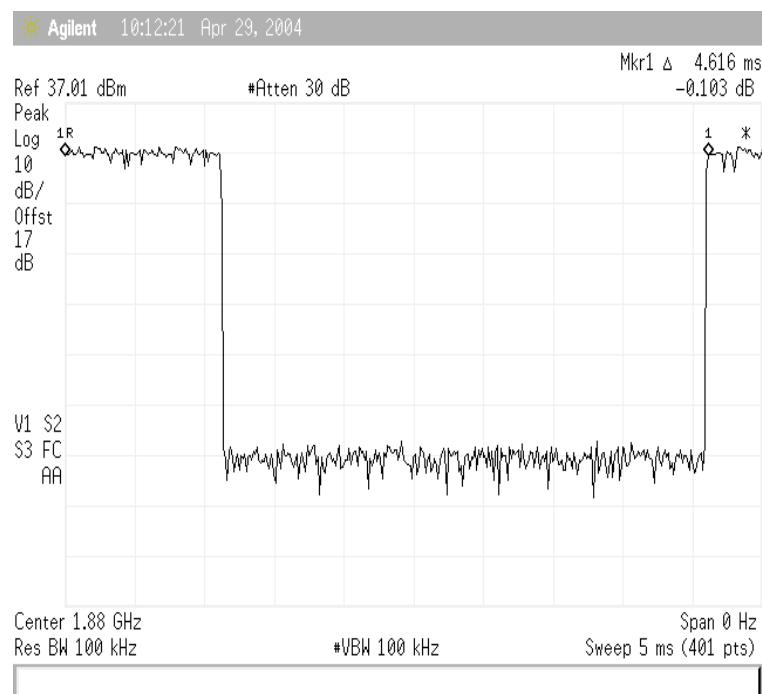

GPRS Mode. View of one Complete Frame Showing TS3/TS4

**2.4 OCCUPIED BANDWIDTH****2.4.1 FCC CFR 47: Part 24 Subpart E, Section 24.238(b)****2.4.2 Equipment Under Test**

MX-V30

2.1.3 Date of Test29th April 2004**2.1.4 Test Equipment Used (See Section 3.1 for details)**

2, 3, 4, 5, 8

2.4.5 Test ProcedureGSM

The EUT was set to transmit on maximum power and measurements were made on Timeslot 3.

GPRS

The EUT was set to transmit on maximum power, (timeslots 3 and 4 active), and measurements were performed on Timeslot 3.

Using a resolution bandwidth of 30kHz and a video bandwidth of 100kHz, the -26dBc points were established and the emission bandwidth determined.


The plots below show the resultant display from the Spectrum Analyser.




2.4 OCCUPIED BANDWIDTH - Continued

2.4.5 Test Results

Occupied Bandwidth As Defined By The - 26dBc Points

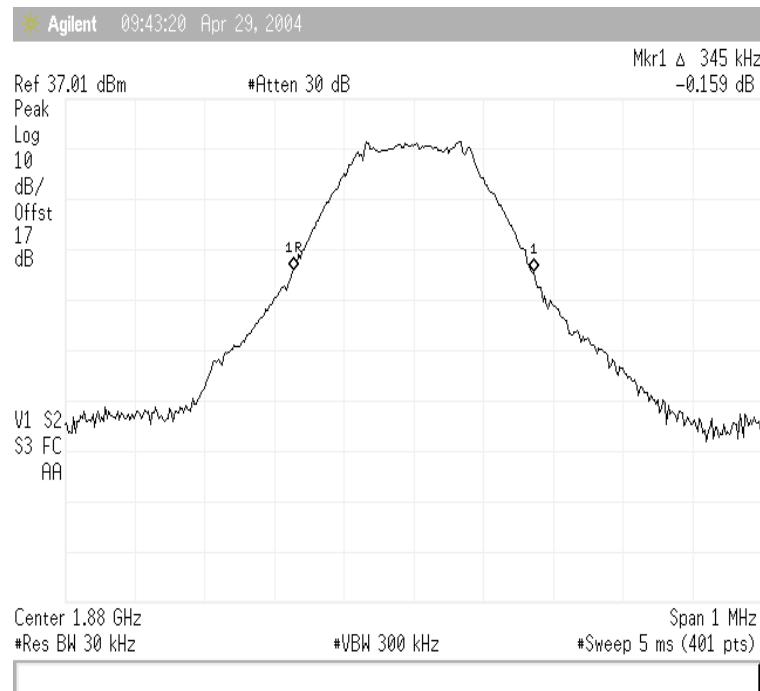



Maximum Power – Circuit Switched (GSM)

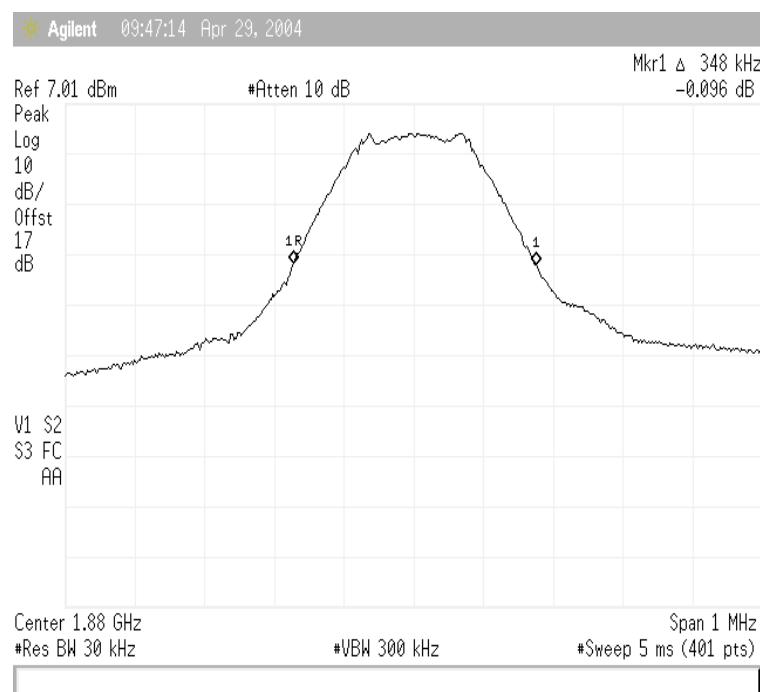

Minimum Power – Circuit Switched (GSM)



2.4 OCCUPIED BANDWIDTH - Continued

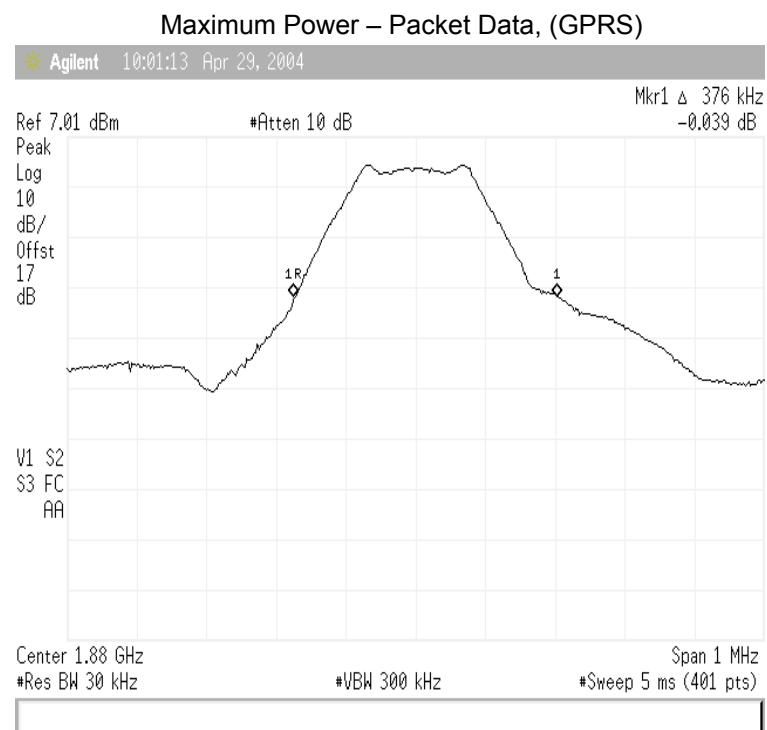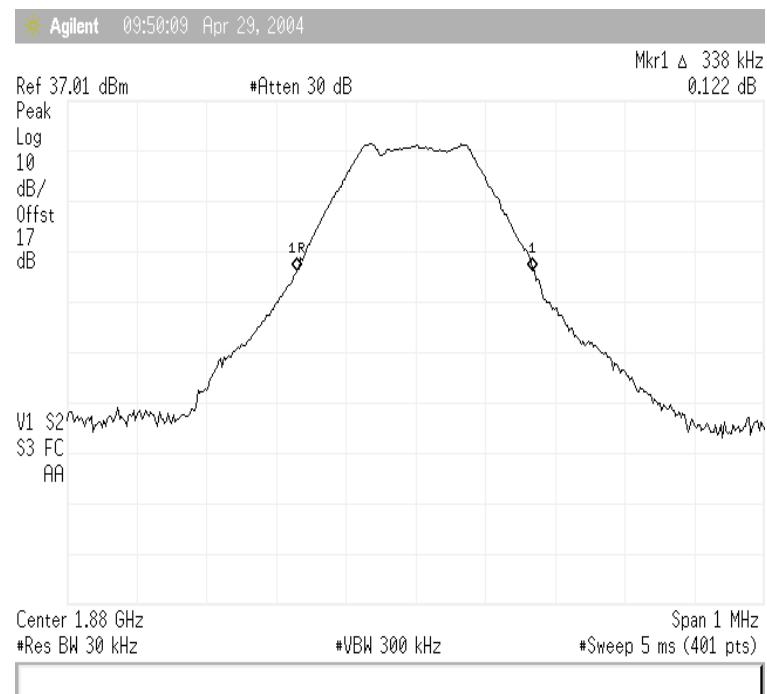

Minimum Power – Packet Data, (GPRS)



2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (+/-1MHz)

2.5.1 FCC CFR 47: Part 24 Subpart E, Section 24.229

2.5.2 Equipment Under Test

MX-V30

2.1.3 Date of Test

28th April 2004

2.1.4 Test Equipment Used (See Section 3.1 for details)

2, 3, 4, 5, 8

2.5.5 Test Procedure

In accordance with Part 24.238, at least 1% of the 26dB bandwidth was used for the resolution and video bandwidths up to 1MHz away from the Block Edge. At greater than 1MHz, the resolution and video bandwidths were increased to 1MHz.

The reference power and path losses of all channels used for testing in each frequency block were measured. It was found that there was <0.6dB variation in all channels, thus the worst case reference level offset was used throughout. Having entered the reference level offset, the limit line was displayed, showing the -13dBm, (43+10logP), limit.

The EUT was tested in GSM and GPRS modes of operation.

Below are the Frequency Blocks the EUT was tested against along with the tested channels.

Frequency Block (MHz)	Lower Block Edge Test Channels/Frequencies	Upper Block Edge Test Channels/Frequencies
A	Channel : 513 Frequency : 1850.4 MHz	Channel : 584 Frequency : 1864.6 MHz
B	Channel : 613 Frequency : 1870.4 MHz	Channel : 684 Frequency : 1884.6 MHz
C	Channel : 738 Frequency : 1895.4 MHz	Channel : 759 Frequency : 1899.6 MHz
C	Channel : 763 Frequency : 1900.4 MHz	Channel : 784 Frequency : 1904.6MHz
C	Channel : 788 Frequency : 1905.4 MHz	Channel : 809 Frequency : 1909.6 MHz
D	Channel : 588 Frequency : 1865.4 MHz	Channel : 609 Frequency : 1869.6 MHz
E	Channel : 688 Frequency : 1885.4 MHz	Channel : 709 Frequency : 1889.6 MHz
F	Channel : 713 Frequency : 1890.4 MHz	Channel : 734 Frequency : 1894.6 MHz

2.5.6 Test Results


The measurement plots are shown on the following pages.



2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (+/-1MHz) – Continued

Block Edge Measurement with EUT Transmitting on full power on Channel 513, (1850.4MHz)

Block A

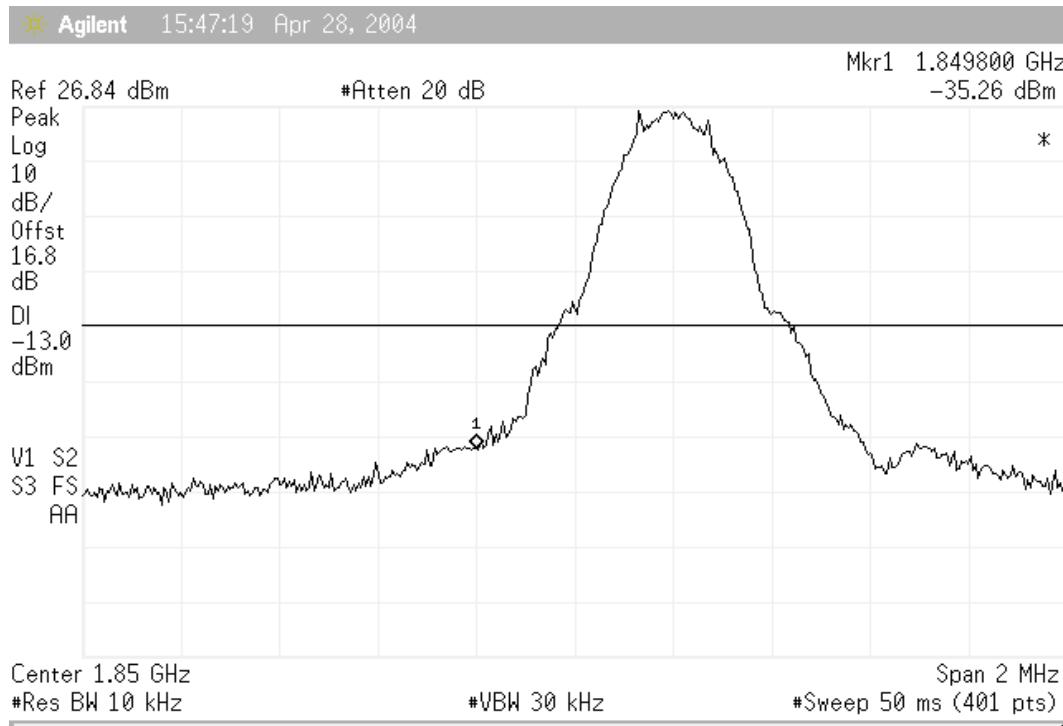


GSM – Circuit Switched



2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (+/-1MHz) – Continued

Block Edge Measurement with EUT Transmitting on full power on Channel 584, (1864.6MHz)

Block A

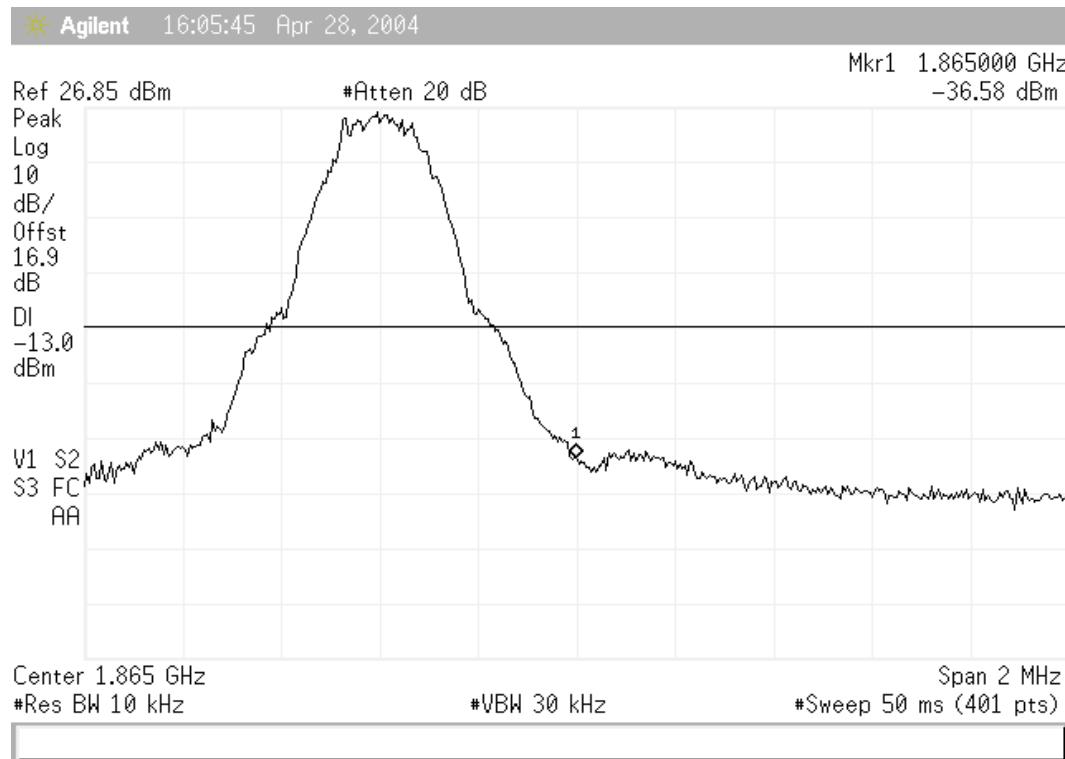


GSM – Circuit Switched



2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (+/-1MHz) – Continued

Block Edge Measurement with EUT Transmitting on full power on Channel 613, (1870.4MHz)

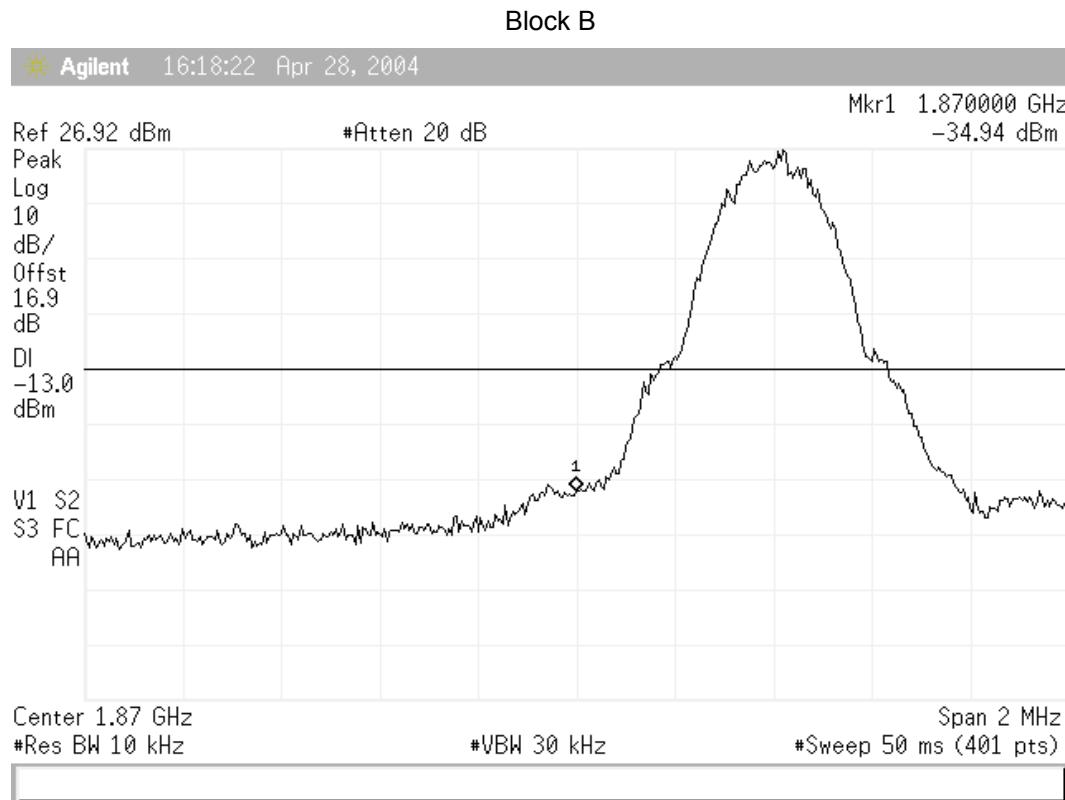


GSM – Circuit Switched



2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (+/-1MHz) – Continued

Block Edge Measurement with EUT Transmitting on full power on Channel 684, (1884.6MHz)

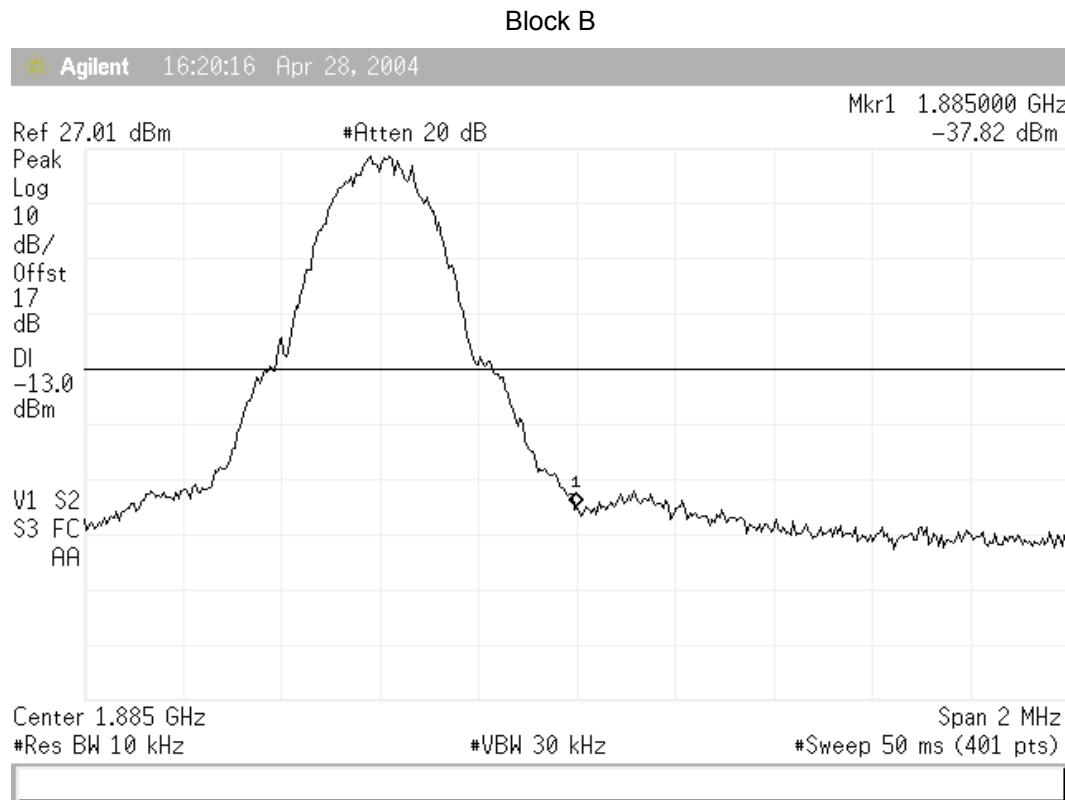


GSM – Circuit Switched



2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (+/-1MHz) – Continued

Block Edge Measurement with EUT Transmitting on full power on Channel 738, (1895.4MHz)

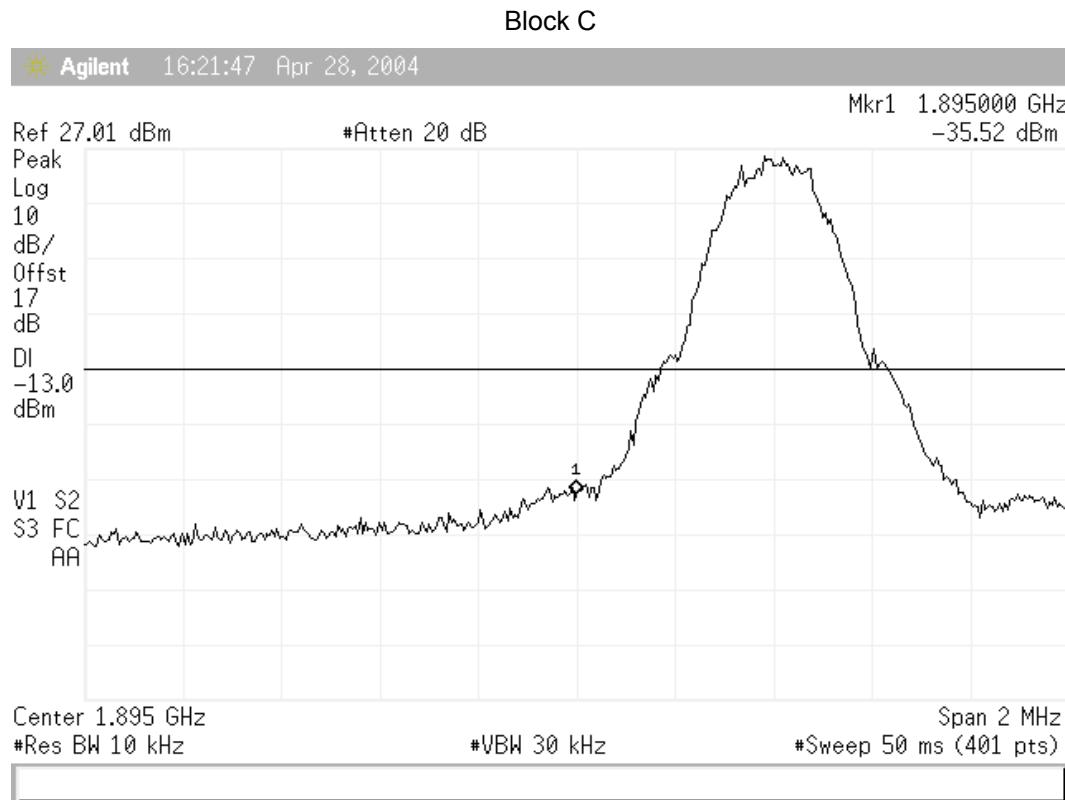


GSM – Circuit Switched



2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (+/-1MHz) – Continued

Block Edge Measurement with EUT Transmitting on full power on Channel 759, (1899.6MHz)

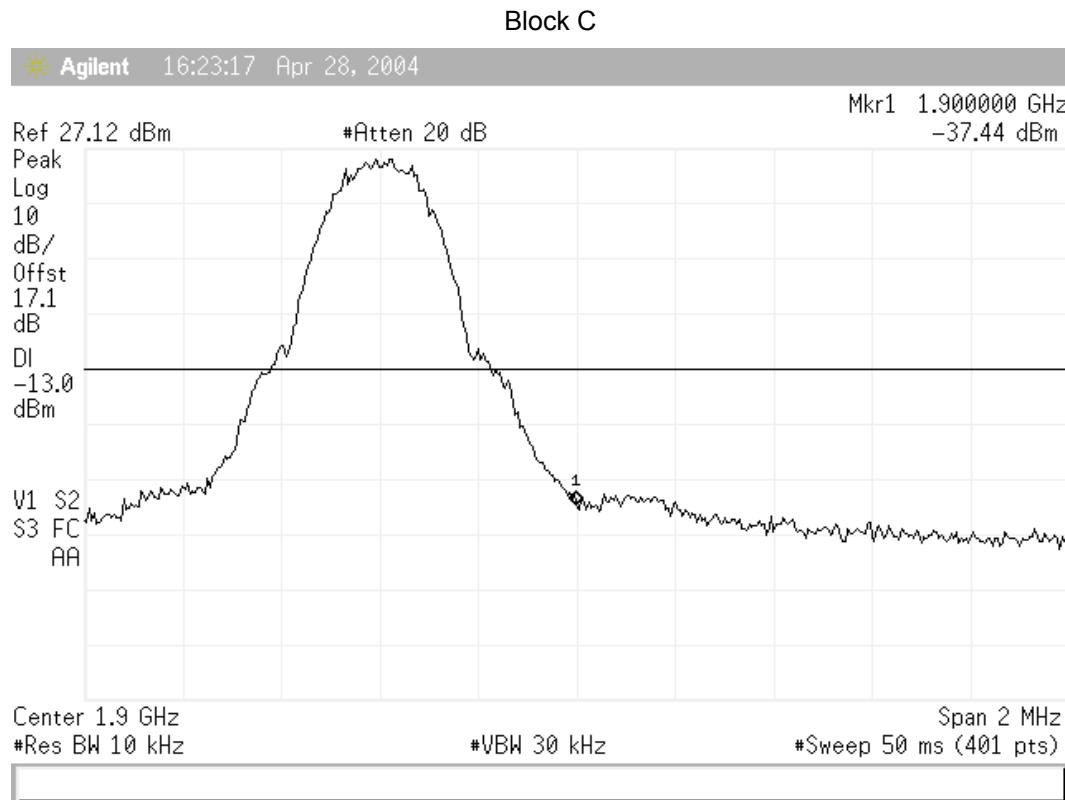


GSM – Circuit Switched



2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (+/-1MHz) – Continued

Block Edge Measurement with EUT Transmitting on full power on Channel 763, (1900.4MHz)

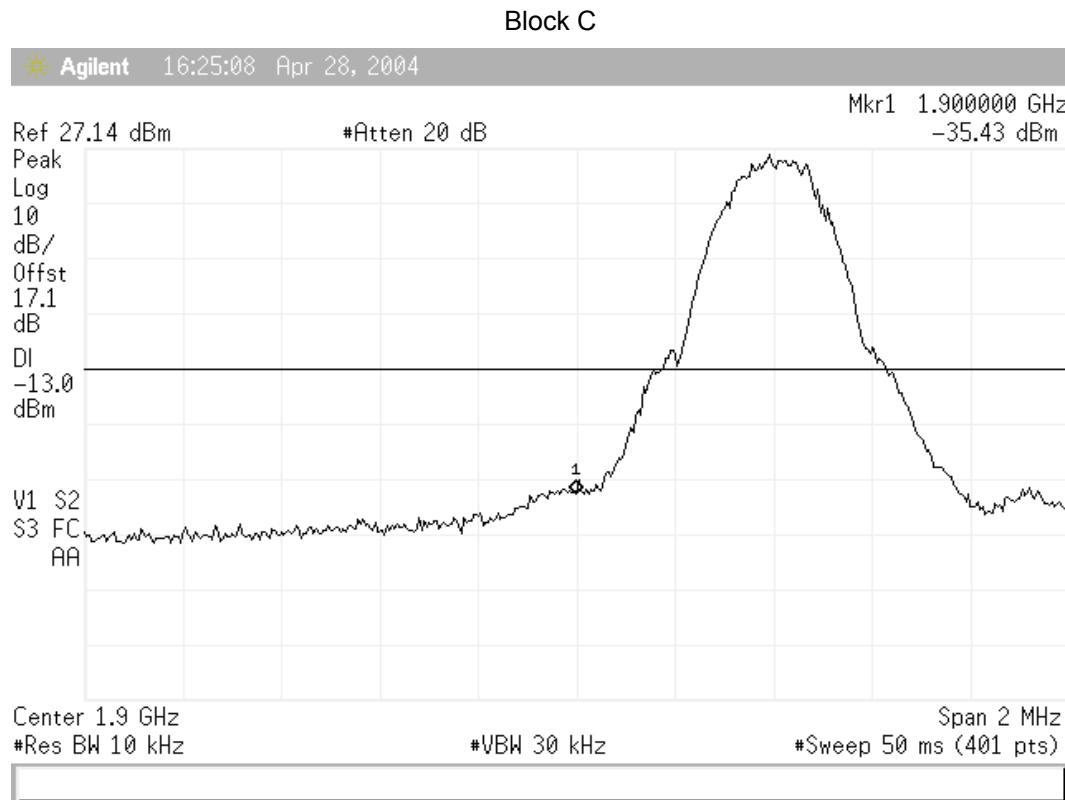


GSM – Circuit Switched



2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (+/-1MHz) – Continued

Block Edge Measurement with EUT Transmitting on full power on Channel 784, (1904.6MHz)

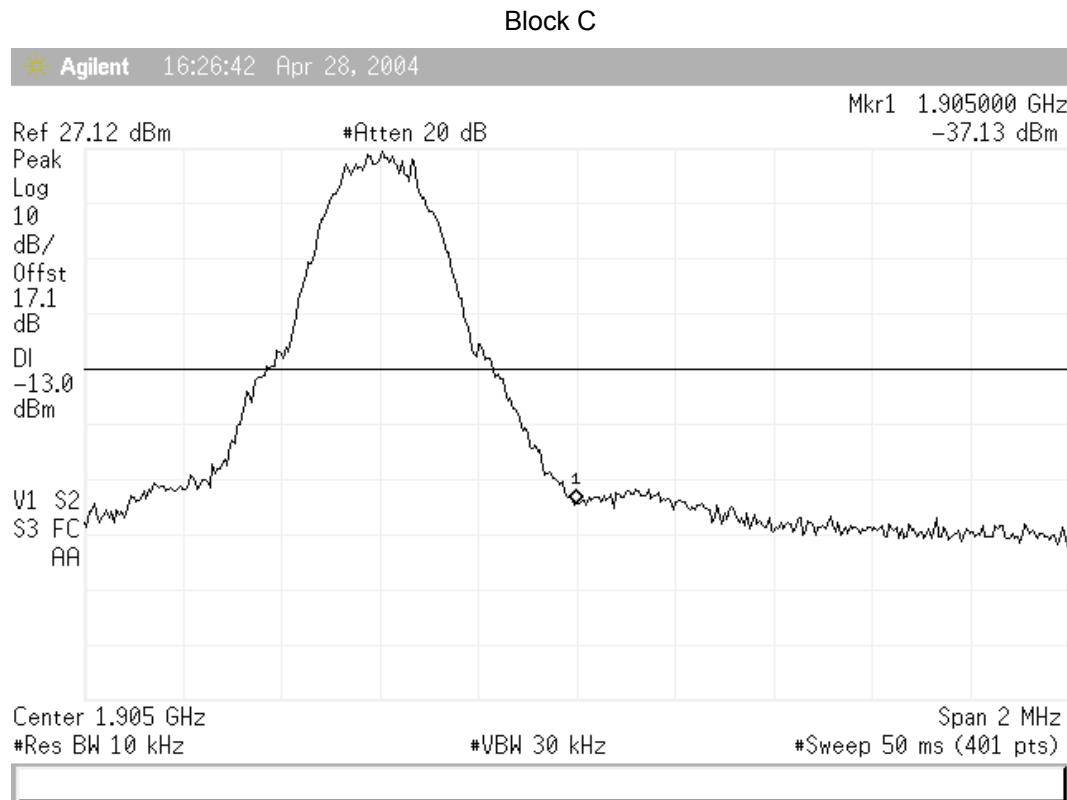


GSM – Circuit Switched



2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (+/-1MHz) – Continued

Block Edge Measurement with EUT Transmitting on full power on Channel 788, (1905.4MHz)

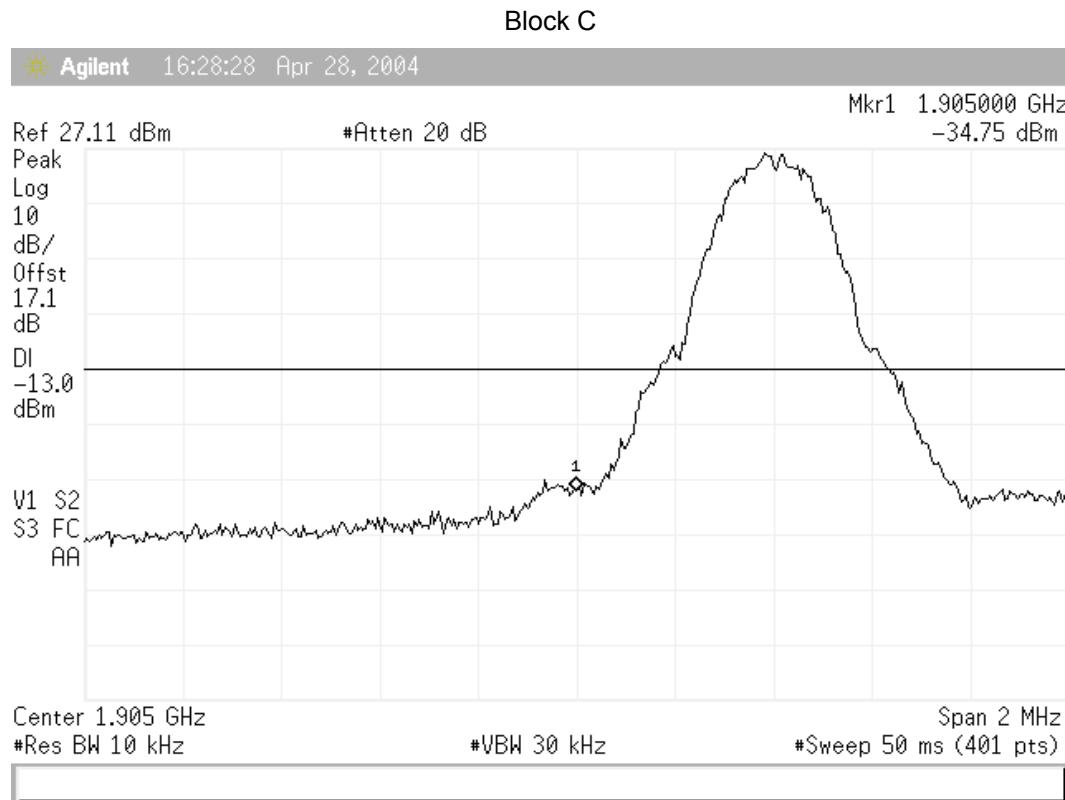


GSM – Circuit Switched



2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (+/-1MHz) – Continued

Block Edge Measurement with EUT Transmitting on full power on Channel 809, (1909.6MHz)

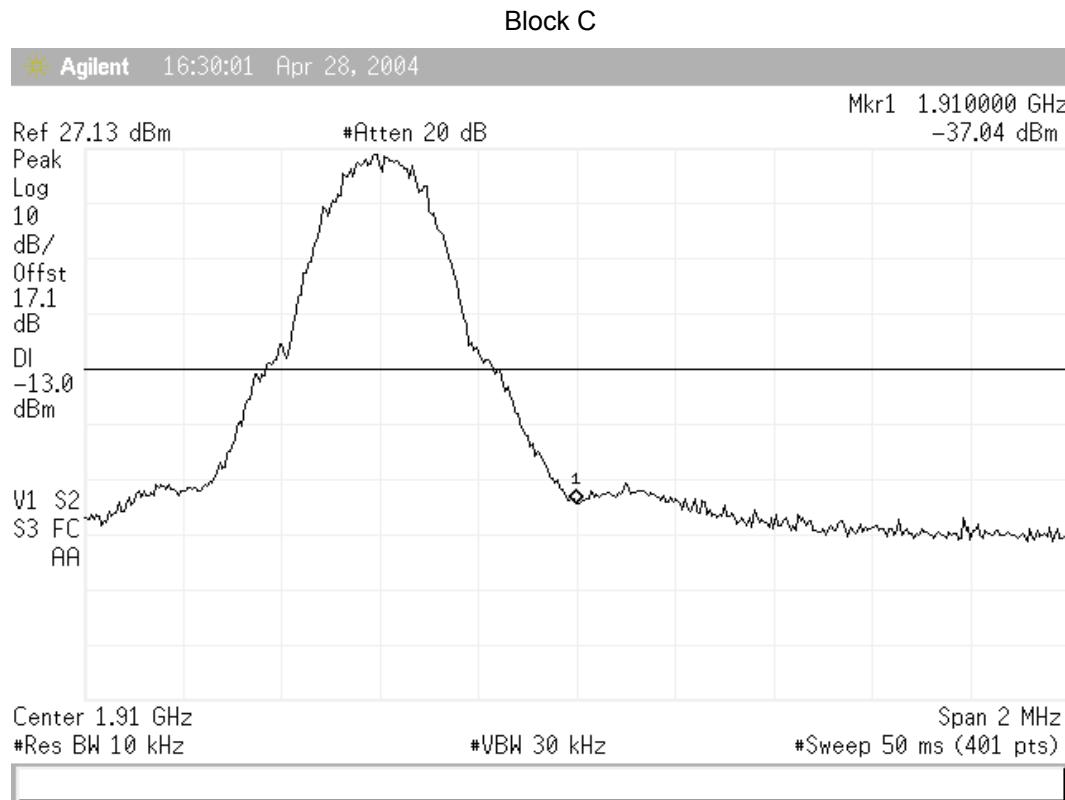


GSM – Circuit Switched



2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (+/-1MHz) – Continued

Block Edge Measurement with EUT Transmitting on full power on Channel 588, (1865.4MHz)

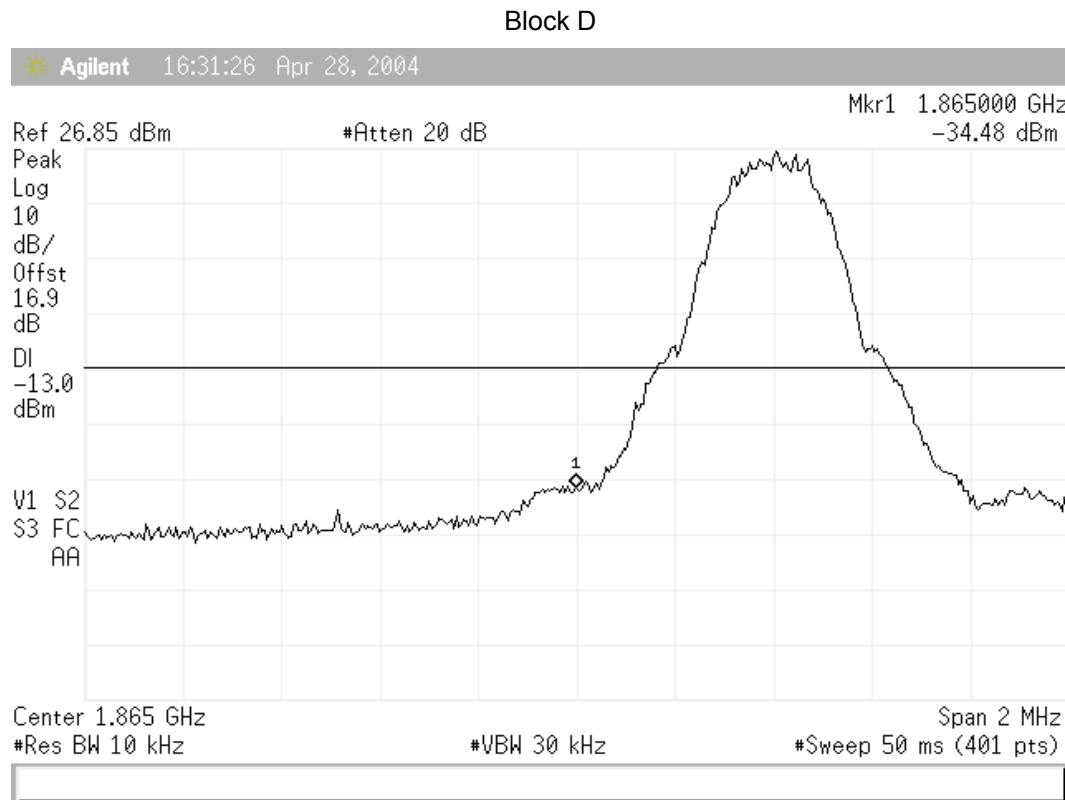


GSM – Circuit Switched



2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (+/-1MHz) – Continued

Block Edge Measurement with EUT Transmitting on full power on Channel 609, (1869.6MHz)

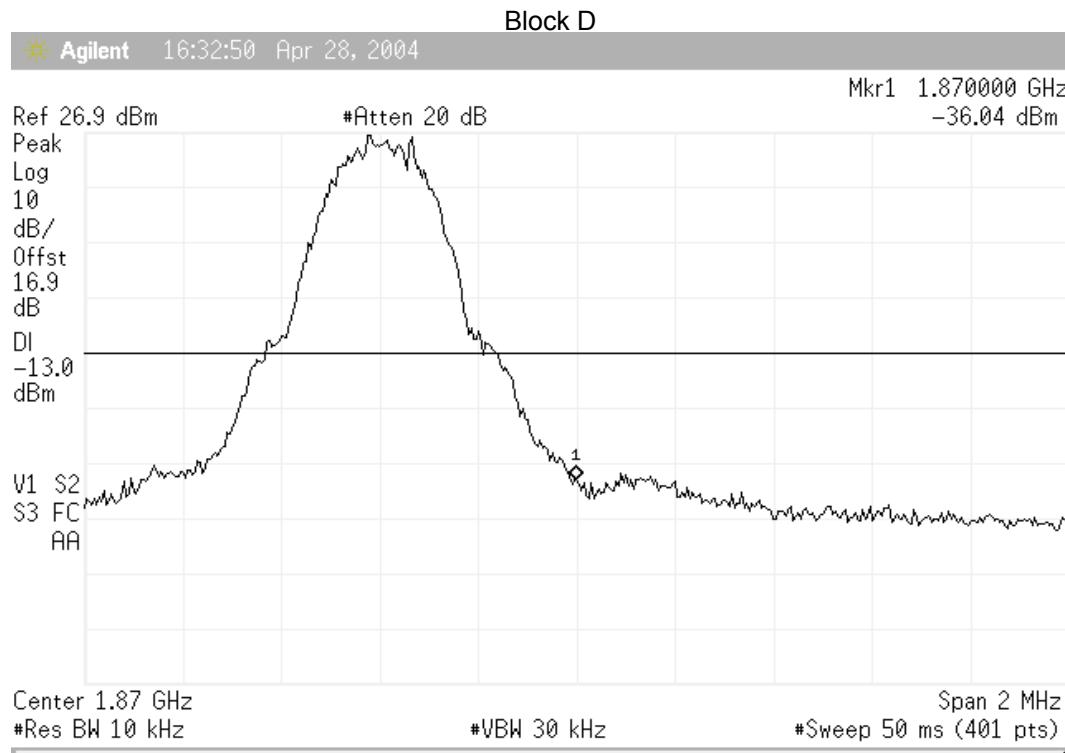


GSM – Circuit Switched



2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (+/-1MHz) – Continued

Block Edge Measurement with EUT Transmitting on full power on Channel 688, (1885.4MHz)

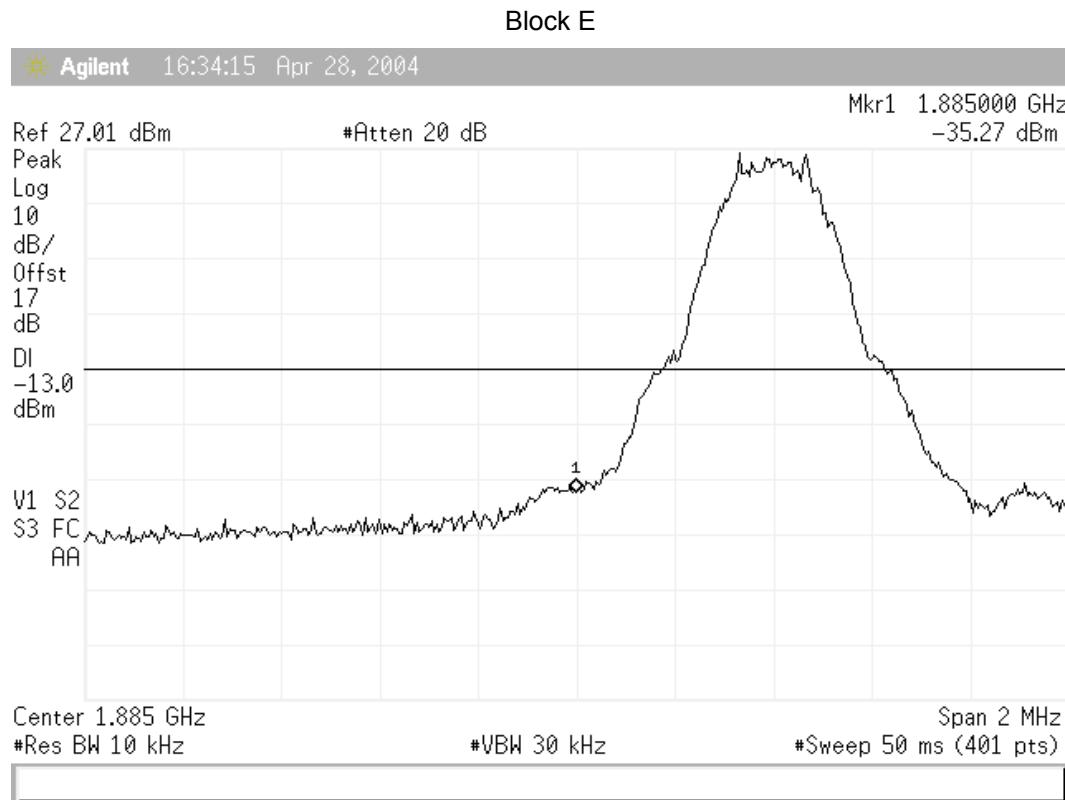


GSM – Circuit Switched



2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (+/-1MHz) – Continued

Block Edge Measurement with EUT Transmitting on full power on Channel 709 (1889.6MHz)

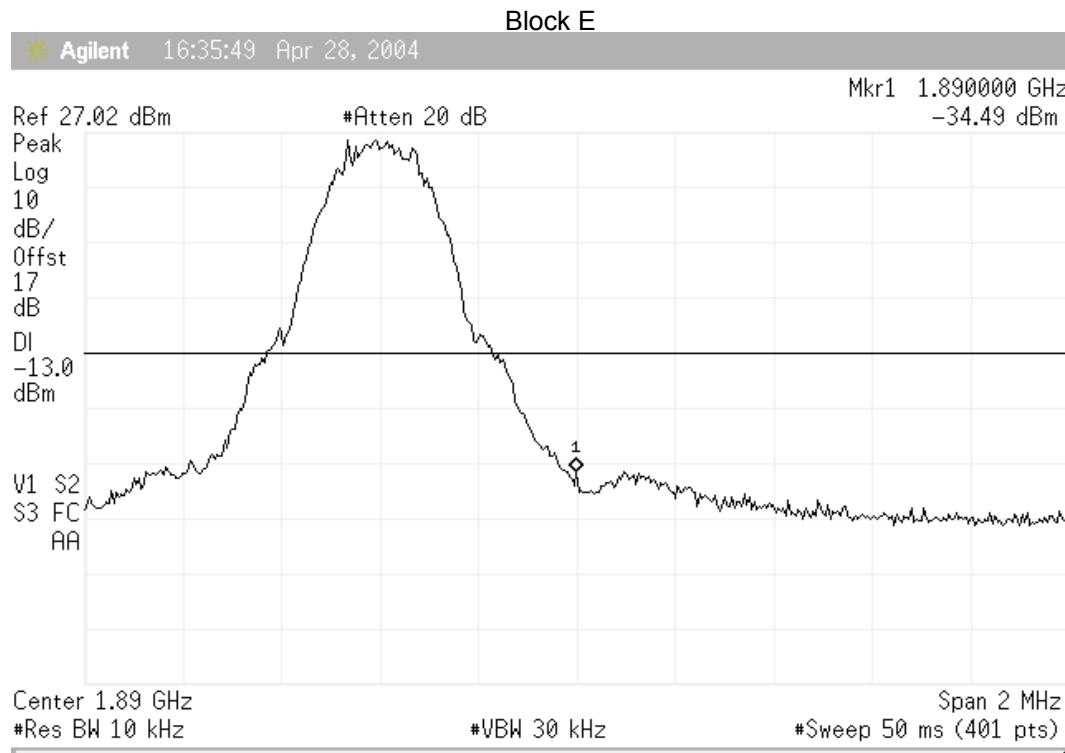


GSM – Circuit Switched



2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (+/-1MHz) – Continued

Block Edge Measurement with EUT Transmitting on full power on Channel 713, (1890.4MHz)

Block F

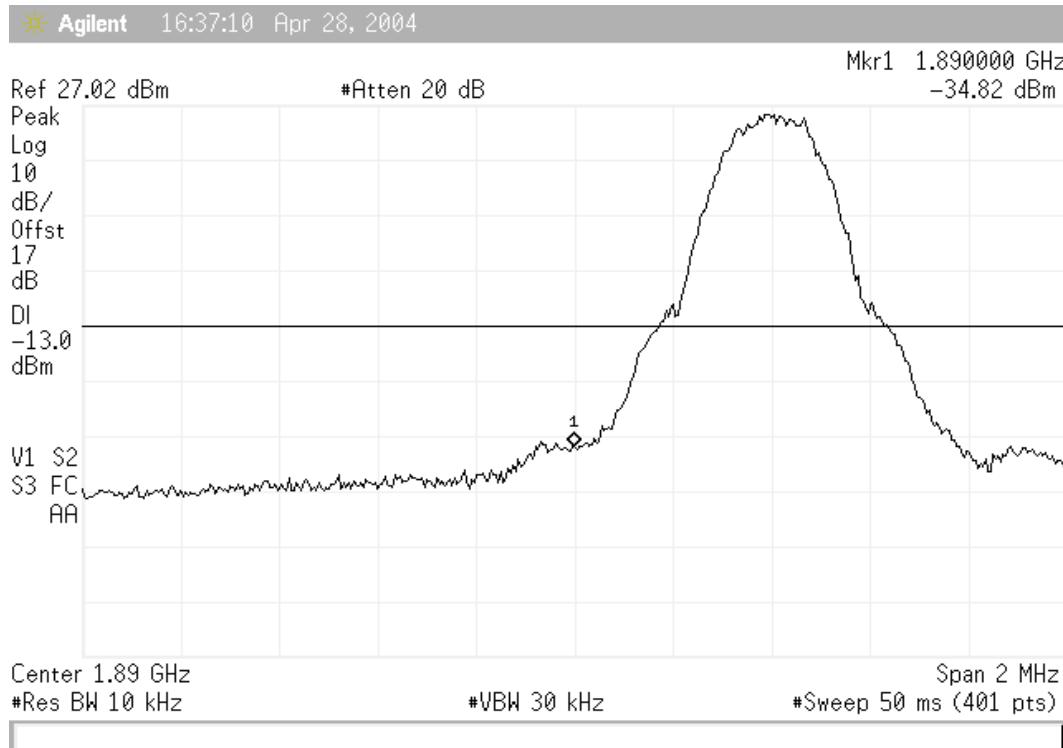


GSM – Circuit Switched



2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (+/-1MHz) – Continued

Block Edge Measurement with EUT Transmitting on full power on Channel 734, (1894.6MHz)

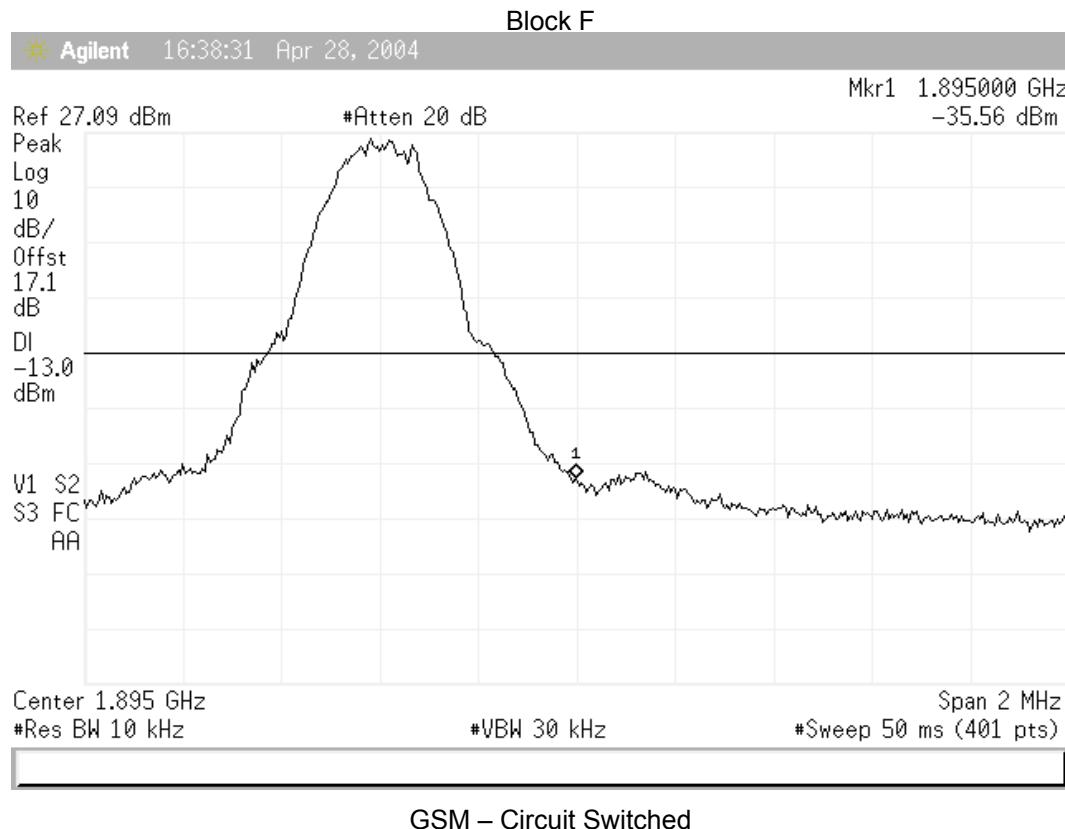




2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (+/-1MHz) – Continued

Block Edge Measurement with EUT Transmitting on full power on Channel 513, (1850.4MHz)

Block A

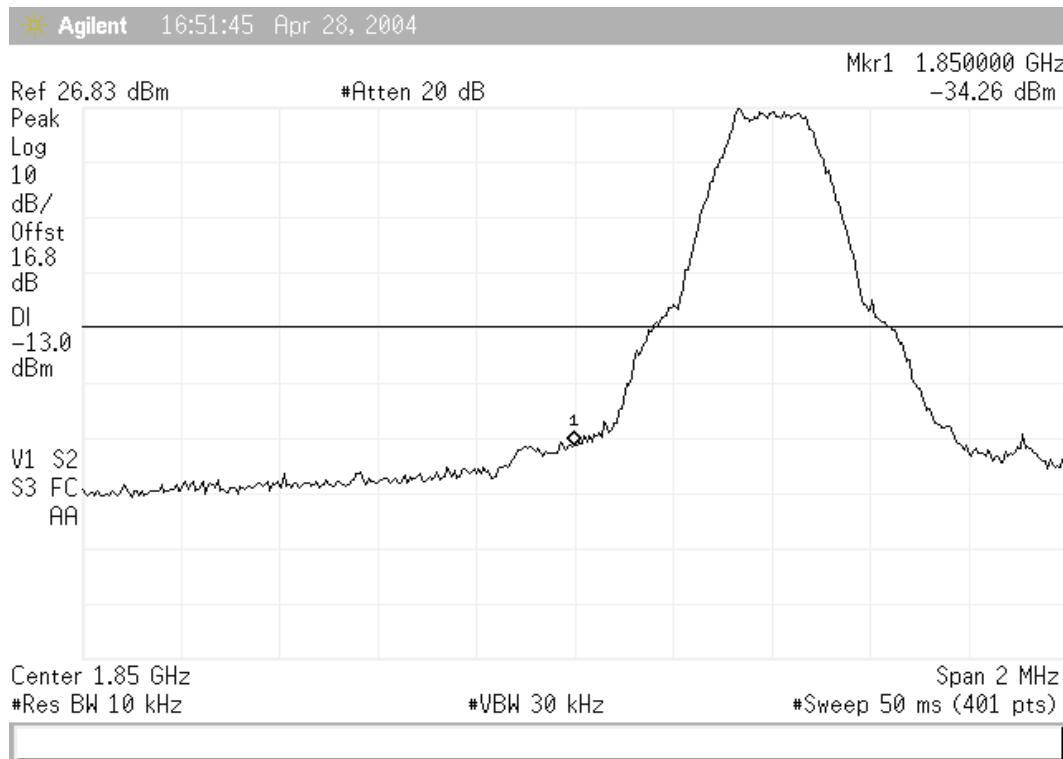


GPRS – Packet Data



2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (+/-1MHz) – Continued

Block Edge Measurement with EUT Transmitting on full power on Channel 584, (1864.6MHz)

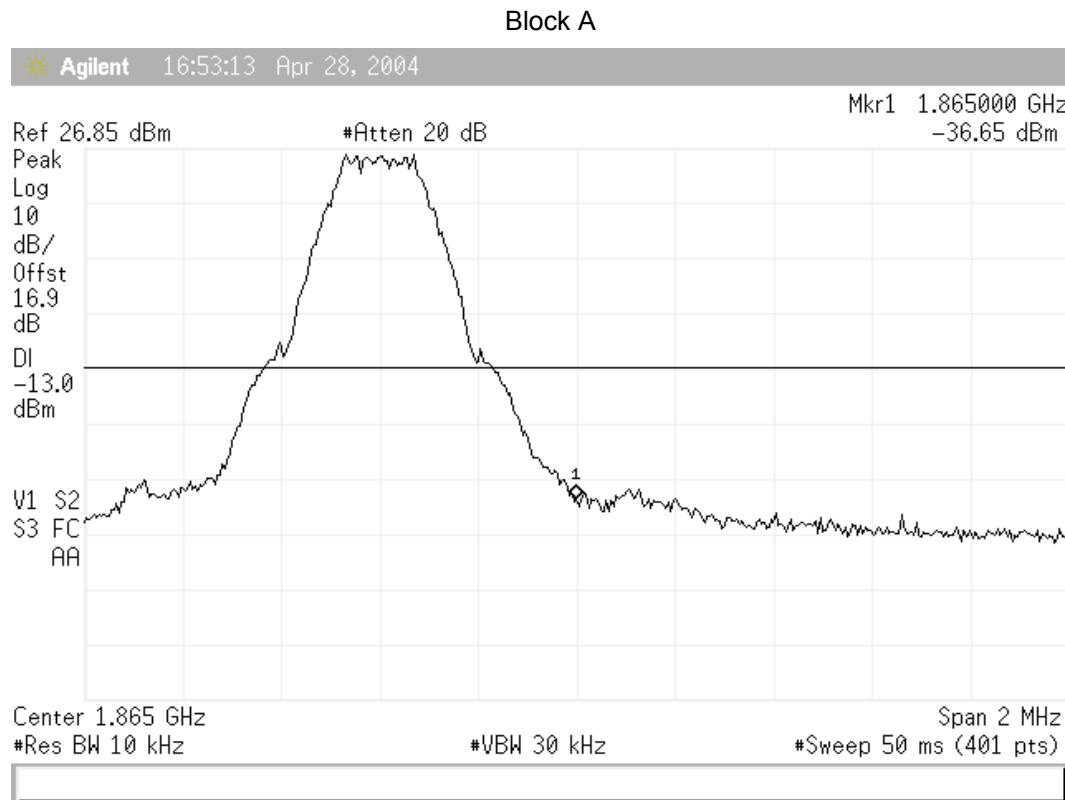


GPRS – Packet Data



2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (+/-1MHz) – Continued


Block Edge Measurement with EUT Transmitting on full power on Channel 613, (1870.4MHz)

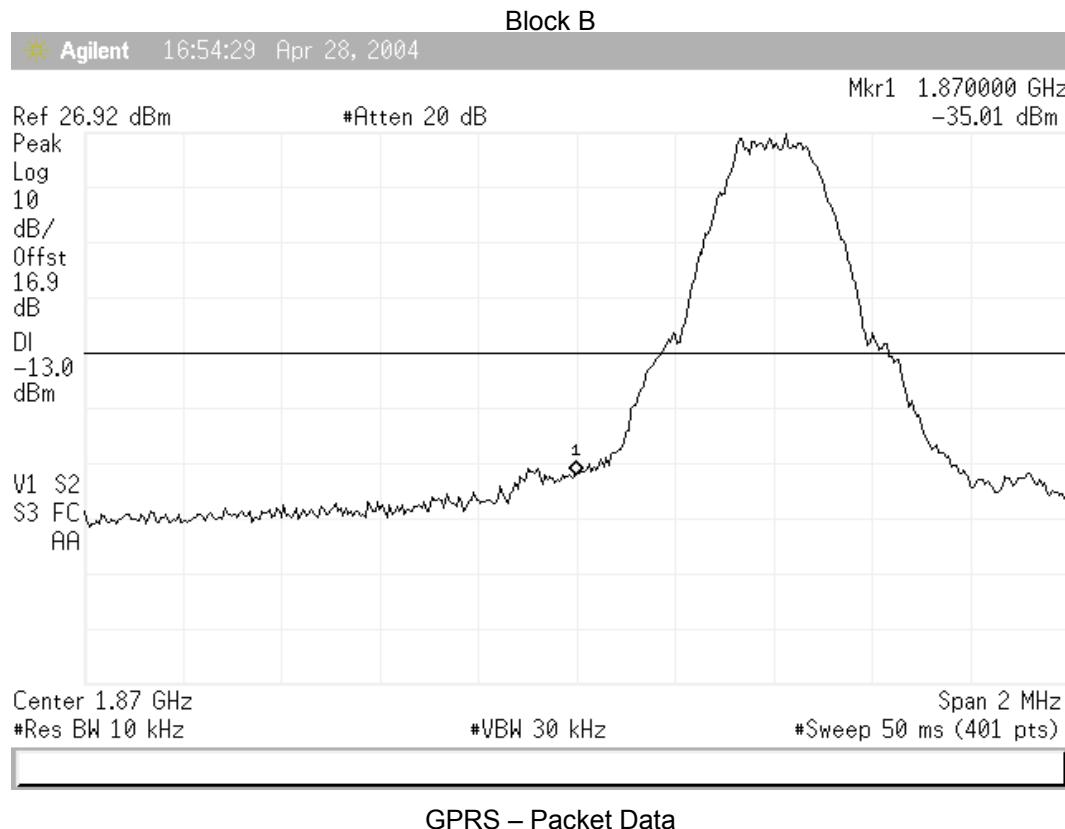



2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (+/-1MHz) – Continued

Block Edge Measurement with EUT Transmitting on full power on Channel 684, (1884.6MHz)

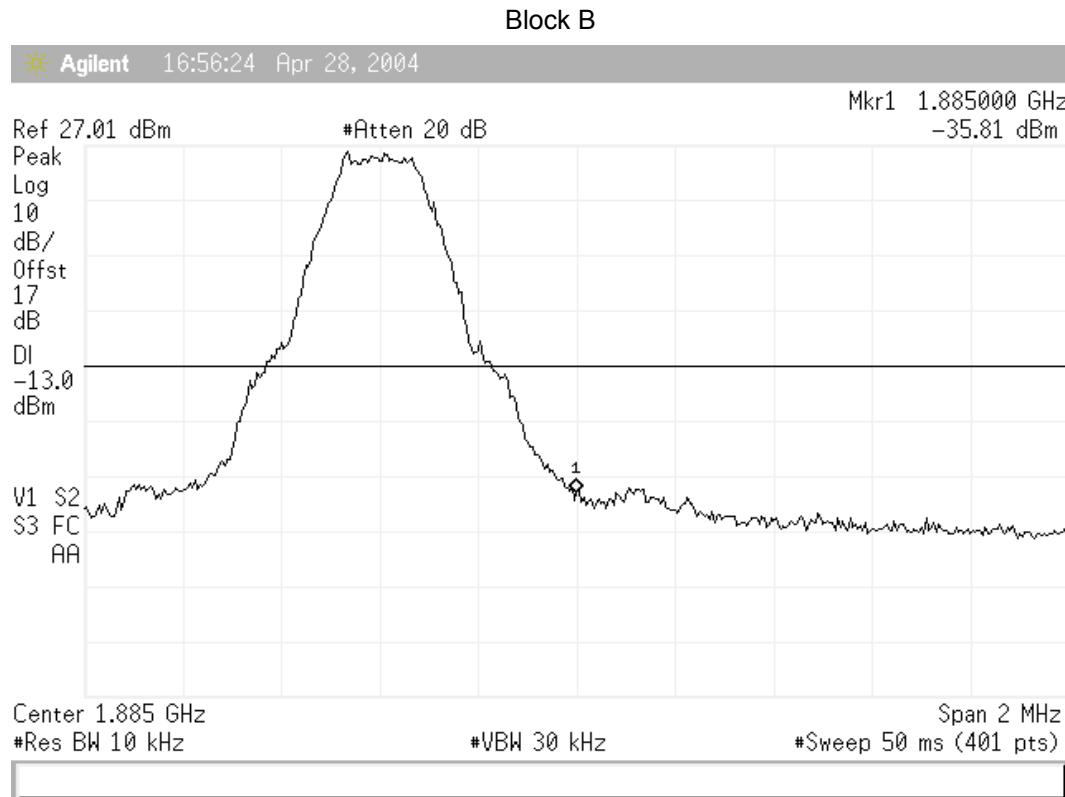


GPRS – Packet Data



2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (+/-1MHz) – Continued

Block Edge Measurement with EUT Transmitting on full power on Channel 738, (1895.4MHz)

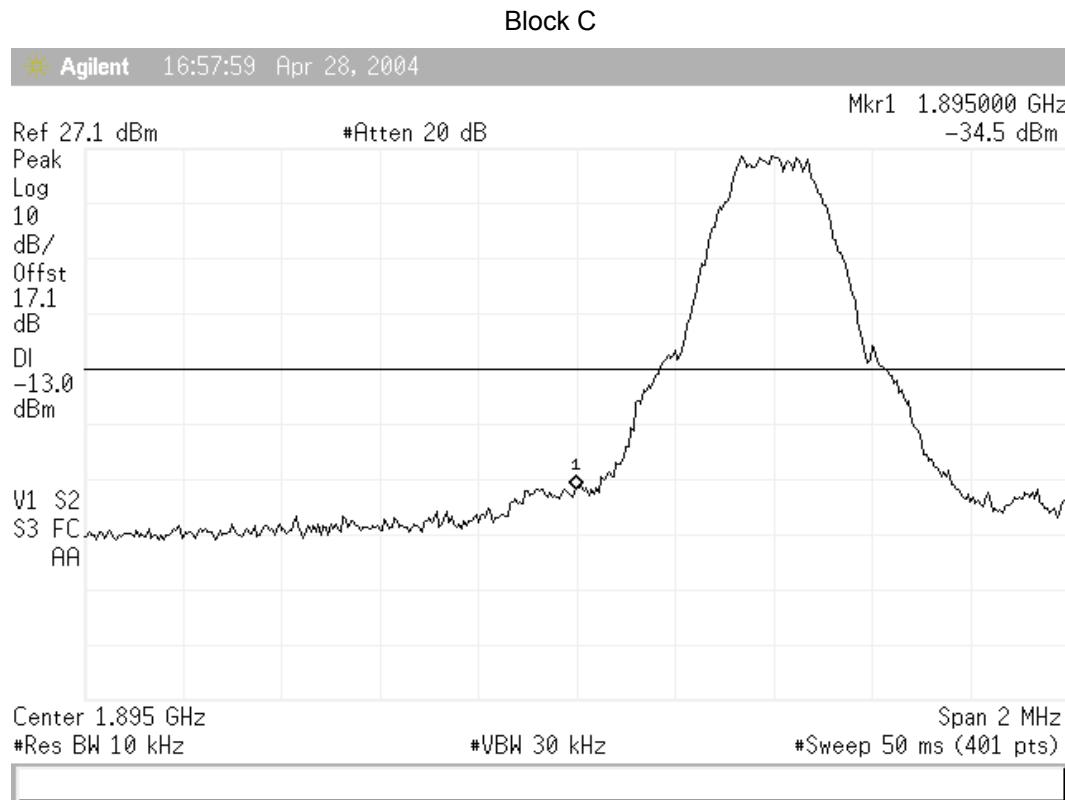


GPRS – Packet Data



2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (+/-1MHz) – Continued

Block Edge Measurement with EUT Transmitting on full power on Channel 759, (1899.6MHz)

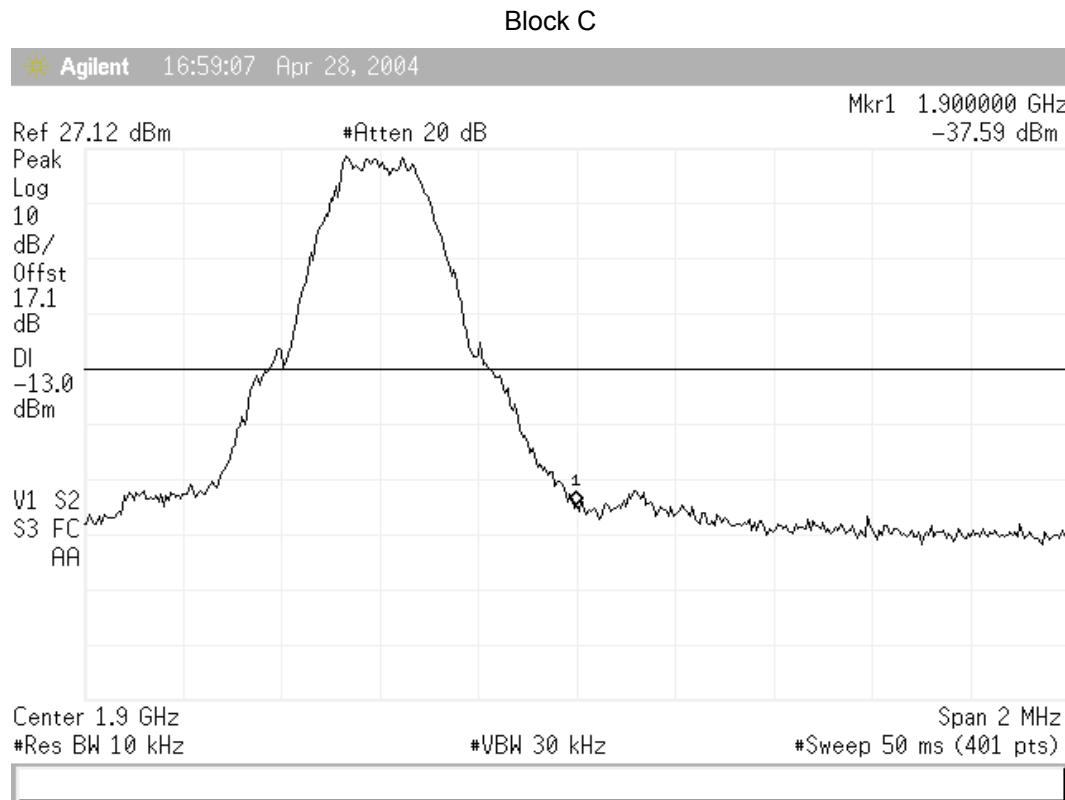


GPRS – Packet Data



2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (+/-1MHz) – Continued


Block Edge Measurement with EUT Transmitting on full power on Channel 763, (1900.4MHz)

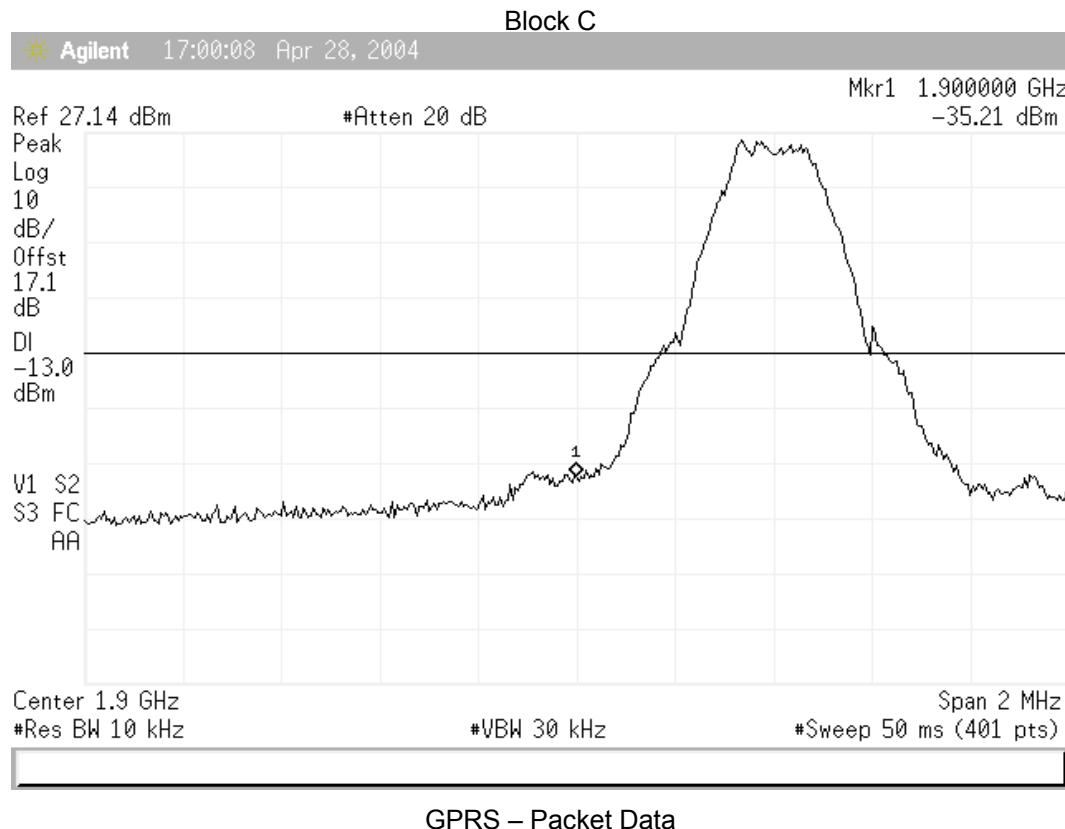



2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (+/-1MHz) – Continued

Block Edge Measurement with EUT Transmitting on full power on Channel 784, (1904.6MHz)

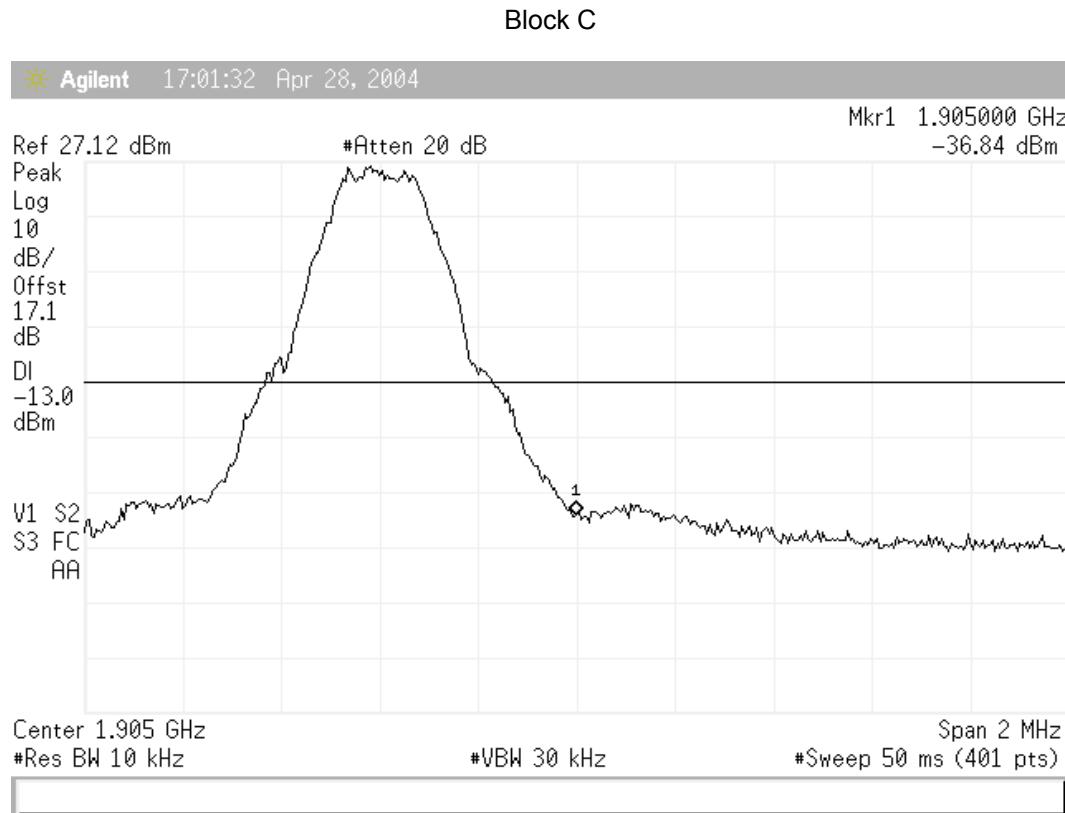


GPRS – Packet Data



2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (+/-1MHz) – Continued

Block Edge Measurement with EUT Transmitting on full power on Channel 788, (1905.4MHz)

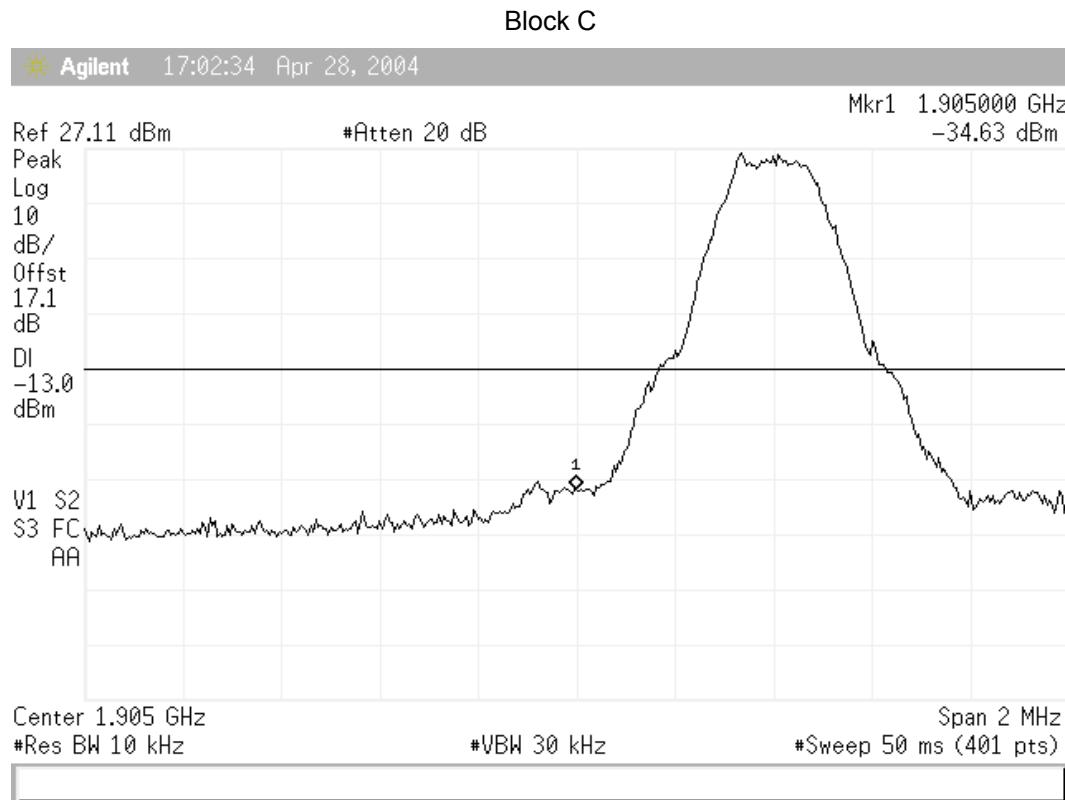


GPRS – Packet Data



2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (+/-1MHz) – Continued

Block Edge Measurement with EUT Transmitting on full power on Channel 809, (1909.6MHz)

Block C

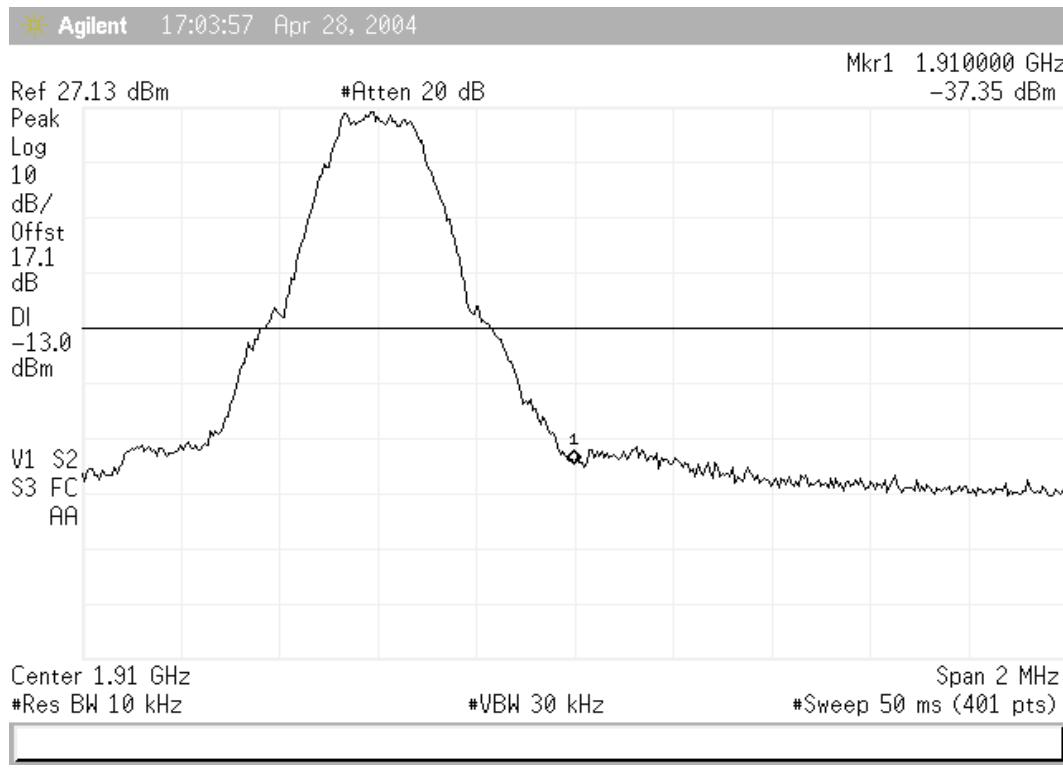


GPRS – Packet Data



2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (+/-1MHz) – Continued

Block Edge Measurement with EUT Transmitting on full power on Channel 588, (1865.4MHz)

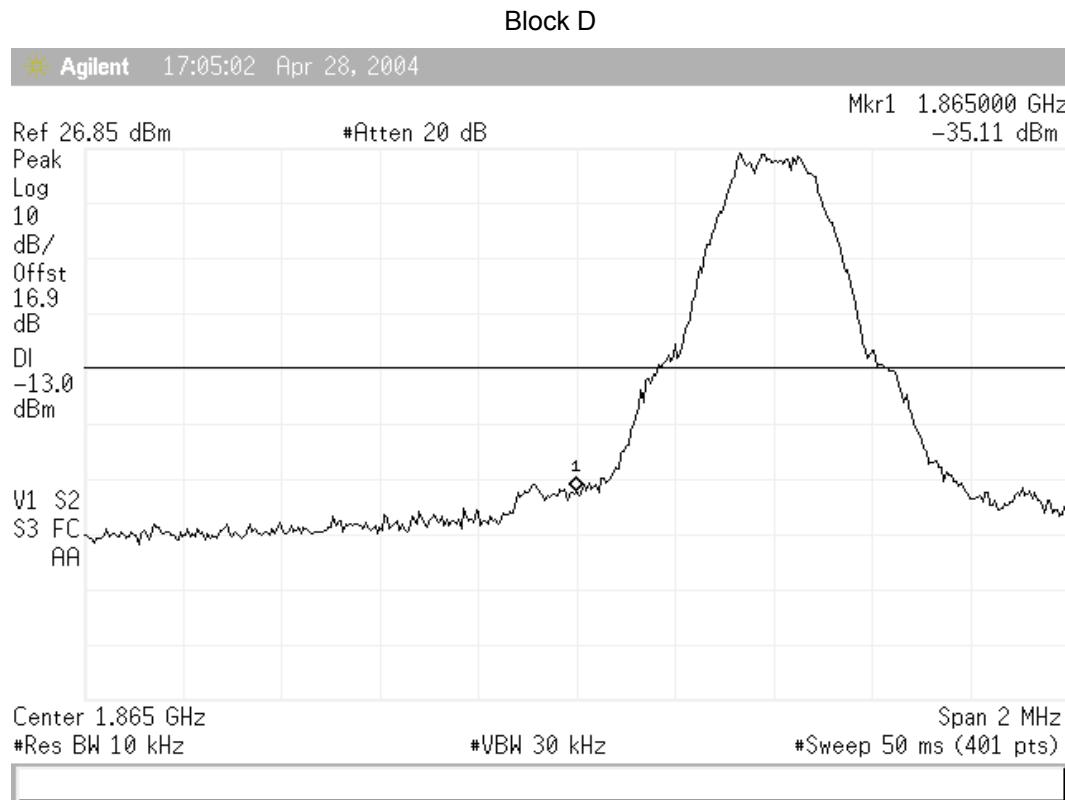


GPRS – Packet Data



2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (+/-1MHz) – Continued


Block Edge Measurement with EUT Transmitting on full power on Channel 609, (1869.6MHz)

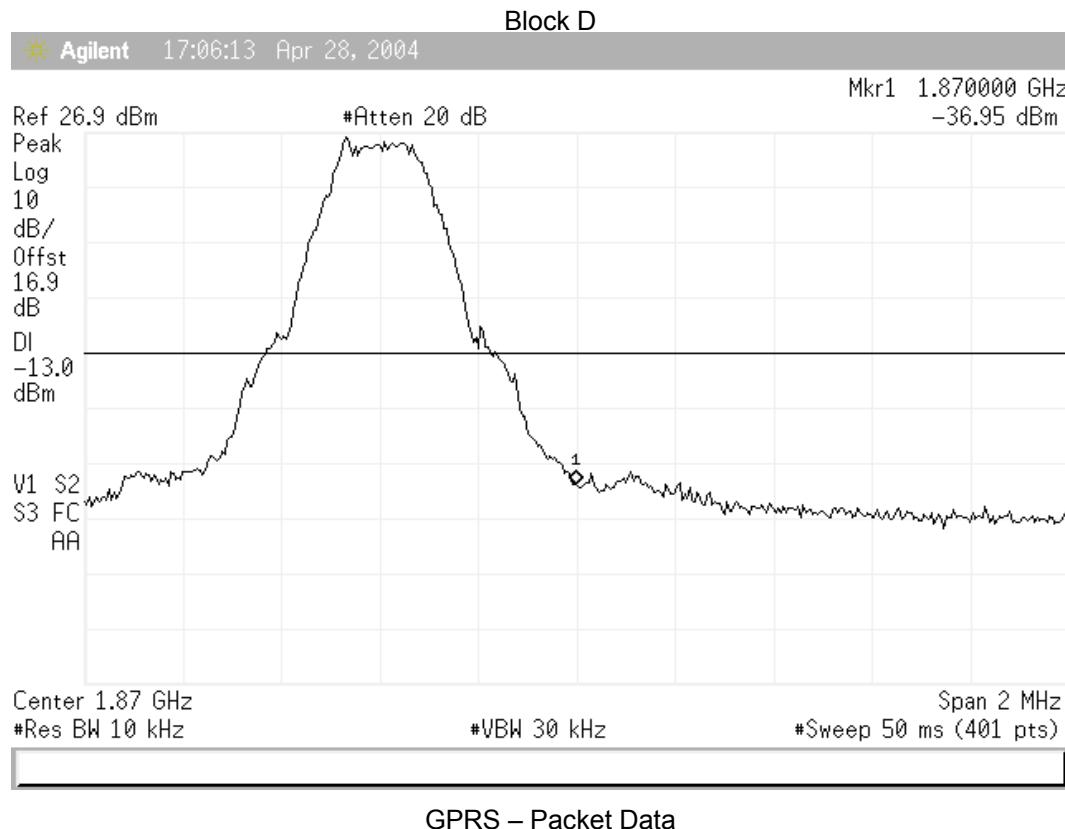



2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (+/-1MHz) – Continued


Block Edge Measurement with EUT Transmitting on full power on Channel 688, (1885.4MHz)

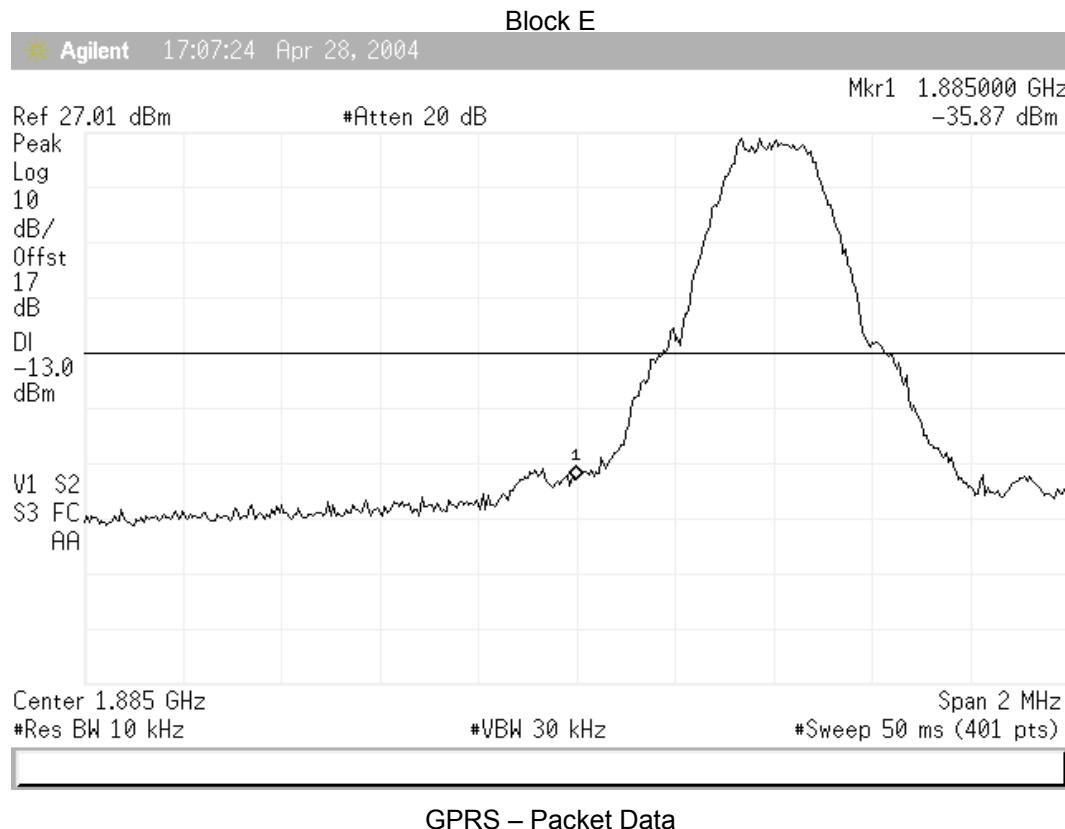



2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (+/-1MHz) – Continued


Block Edge Measurement with EUT Transmitting on full power on Channel 709 (1889.6MHz)

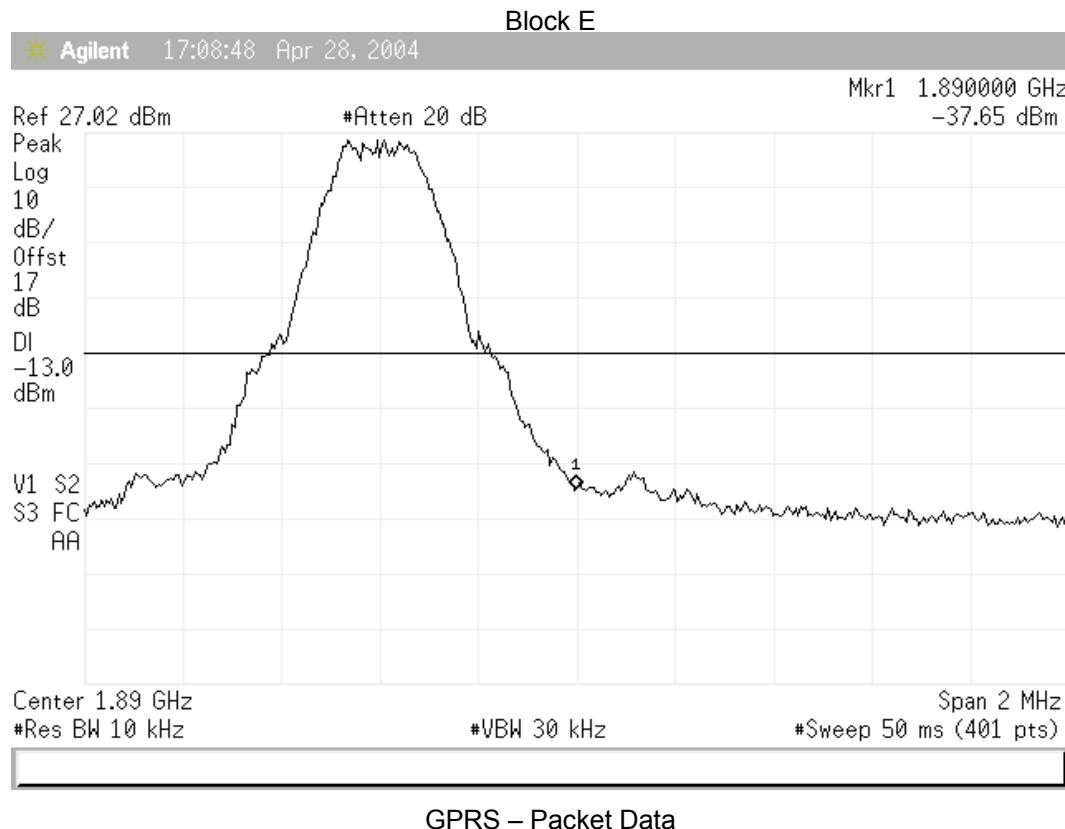



2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (+/-1MHz) – Continued


Block Edge Measurement with EUT Transmitting on full power on Channel 713, (1890.4MHz)

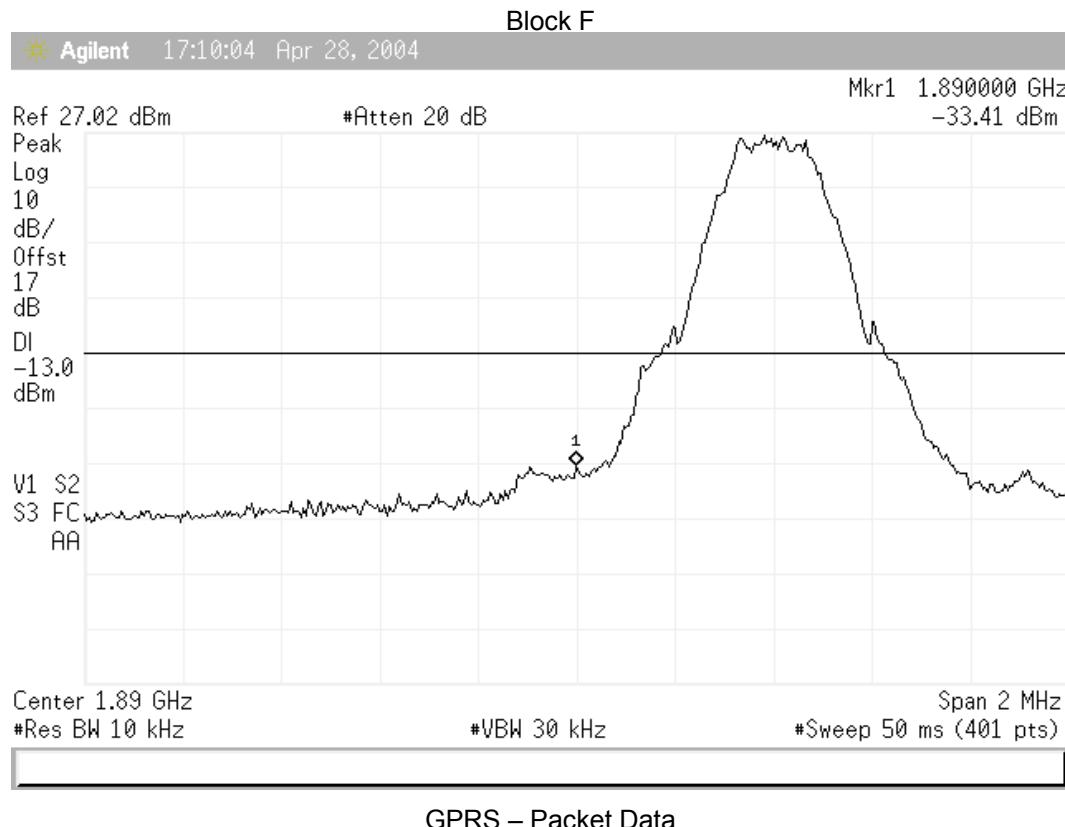



2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (+/-1MHz) – Continued

Block Edge Measurement with EUT Transmitting on full power on Channel 734, (1894.6MHz)

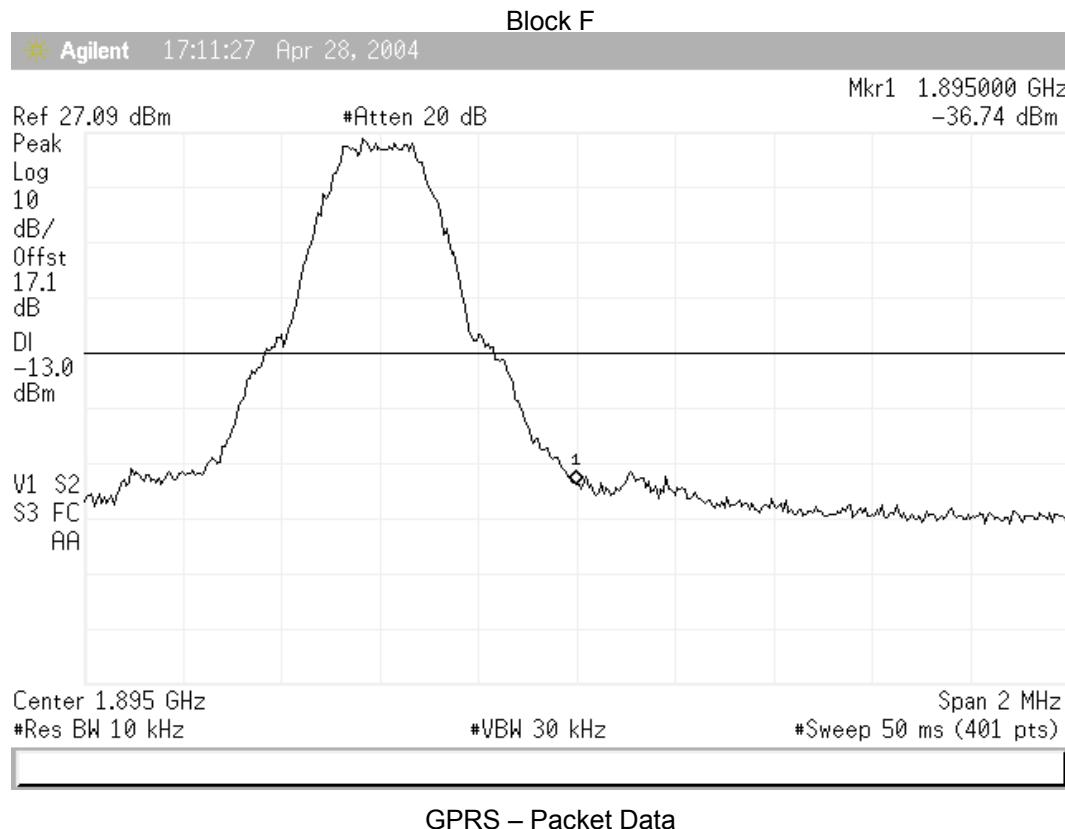



2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS (+/-1MHz) – Continued

2.5.6 Test Results

All emissions are below –13dBm up to 1MHz away from each block edge.



2.6 RADIATED EMISSIONS

2.6.1 FCC CFR 47: Part 24 Subpart E, Section 2.1053, 15.209, 24.238

2.6.2 Equipment Under Test

MX-V30

2.6.3 Date of Test

26th April 2004

2.6.4 Test Equipment Used (See Section 3.1 for details)

13, 14, 15, 16, 17, 19, 23, 24, 25, 26, 30

2.6.5 Test Procedure

Test Performed in accordance with ANSI C63.4.

In order to determine the Radiated Emission Limits, measurements of transmitter power (P) were first carried out on the top and bottom channels using a peak detector, and the results are shown in the following table.

A preliminary profile of the Spurious Radiated Emissions was obtained by operating the EUT on a remotely controlled turntable within a semi-anechoic chamber. Measurements of emissions from the EUT were obtained with the Measurement Antenna in both Horizontal and Vertical Polarisations. The profiling produced a list of the worst-case emissions together with the EUT azimuth and antenna polarisation.

Using the information from the preliminary profiling of the EUT. The list of emissions was then confirmed or updated under Alternative Open Site conditions. Emission levels were maximised by adjusting the antenna height, antenna polarisation and turntable azimuth.

Emissions identified within the range 30MHz – 1GHz were then formally measured using a Peak Detector (PCS 1900 Link Modes) to meet Part 24.238 specification requirements.

Emissions identified within the range 1GHz – 20GHz were then formally measured using a Peak Detector, (PCS 1900 Link Modes) to meet Part 24.238 specification requirements, as appropriate.

Emissions identified within the range 30MHz – 1GHz were then formally measured using a CISPR Quasi-Peak Detector (PCS 1900 Idle Mode) to meet Part 15B specification requirements.

The measurements were performed at a 3m distance unless otherwise stated.



2.6 RADIATED EMISSIONS - continued

2.6.6 Test Results

Measurements were made with the EUT in PCS 1900MHz.

The measurements of transmitter power, (P), on top and bottom channels are detailed in the table below.

Freq MHz	Res BW MHz	Vid BW MHz	Ant Pol V/H	Ant Hgt cm	EUT Azi Deg	Raw PEAK dB μ V	Cable loss dB	Antenna Factor dB	Result Peak dB μ V/m
Tx Channel 512									
1850.2	1	1	H	122	277	97.2	4.3	26.9	128.4
Tx Channel 661									
1880.0	1	1	H	116	283	97.3	4.4	27.0	128.7
Tx Channel 810									
1909.8	1	1	H	114	286	95.1	4.4	27.0	126.5

The limit for spurious emissions in accordance with FCC 47 CFR 24.238 is $43 + 10\log(P)$ down on the carrier where P is the power in Watts.

As the EIRP for the Top Channel is 1.047W the spurious limit is $43 + 10\log(P) = 43.2$ dB down on the carrier.

As the EIRP for the Middle Channel is 1.660W the spurious limit is $43 + 10\log(P) = 45.2$ dB down on the carrier.

As the EIRP for the Bottom Channel is 1.698W the spurious limit is $43 + 10\log(P) = 45.3$ dB down on the carrier.

Using the results obtained on the Three channels the following limits were calculated:

Bottom channel 512: $128.4\text{dB}\mu\text{V/m} - 45.3\text{dB} = 83.1\text{dB}\mu\text{V/m}$

Middle Channel 661: $128.7\text{dB}\mu\text{V/m} - 45.2\text{dB} = 83.5\text{dB}\mu\text{V/m}$

Top Channel 810: $126.5\text{dB}\mu\text{V/m} - 43.2\text{dB} = 83.3\text{dB}\mu\text{V/m}$

These limits have been used to determine Pass or Fail for the harmonics or spurious emissions measured and detailed in the following tables.

Abbreviation for Table

Res BW	Resolution Bandwidth
Vid BW	Video Bandwidth
Ant Pol	Antenna Polarisation
Ant Hgt	Antenna Height
Azm	Azimuth
V	Vertical
H	Horizontal



2.6 RADIATED EMISSIONS - continued

2.6.6 Test Results - continued

30MHz – 1GHz Frequency Range

The EUT met the requirements of FCC Part 24.238 as shown in the following three tables.

EUT Tx on Bottom Channel (1850.2MHz)

Measurements were made with the EUT in PCS 1900MHz.

Frequency	Antenna Polarisation	Height	Azimuth	Peak Field Strength	Specification limit
MHz	H/V	cm	Deg	dB μ V/m	dB μ V/m
842.1	V	100	0→360	39.5	83.1
853.0	V	100	0→360	42.3	83.1
888.5	V	100	0→360	43.5	83.1

EUT Tx on Middle Channel (1880.0MHz)

Measurements were made with the EUT in PCS 1900MHz.

Frequency	Antenna Polarisation	Height	Azimuth	Peak Field Strength	Specification limit
MHz	H/V	cm	Deg	dB μ V/m	dB μ V/m
842.1	V	100	0→360	39.4	83.5
853.4	V	100	0→360	42.4	83.5
888.5	V	100	0→360	43.0	83.5

EUT Tx on Top Channel (1909.8MHz)

Measurements were made with the EUT in PCS 1900MHz.

Frequency	Antenna Polarisation	Height	Azimuth	Peak Field Strength	Specification limit
MHz	H/V	cm	Deg	dB μ V/m	dB μ V/m
851.3	V	100	0→360	42.4	83.3
885.8	V	100	0→360	40.4	83.3

Note: the measurements in the above tables are Peak System Noise Floor Measurements, as no emissions attributable to the EUT were detected above the Measuring System Noise Floor which was a minimum of 20dB below the test limit.



2.6 RADIATED EMISSIONS - continued

2.6.6 Test Results - continued

The EUT met the requirements of FCC Part 15.109 for Radiated Emissions (30MHz –1GHz as shown below).

EUT Rx on Middle Channel (1880.0MHz)

Measurements were made with the EUT in PCS 1900MHz (idle mode).

Frequency	Antenna Polarisation	Height	Azimuth	Quasi-Peak Field Strength	Specification limit
MHz	H/V	cm	Deg	dB μ V/m	dB μ V/m
60.00	V	100	0	18.4	40.0
175.00	V	100	0	16.4	43.5
300.00	V	100	0	19.8	43.5
500.00	V	100	0	23.9	46.0
700.00	V	100	0	24.9	46.0
900.00	V	100	6	25.3	46.0



2.6 RADIATED EMISSIONS - continued

2.6.6 Test Results - continued

1GHz – 20GHz Frequency Range

The EUT met the requirements of FCC Part 15.109 for Radiated Emissions (30 MHz – 1 GHz as shown below).

EUT Tx on Bottom Channel (1850.2MHz)

Measurements were made with the EUT in PCS 1900MHz.

Frequency	Antenna Polarisation	Height	Azimuth	Peak Field Strength	Specification Limit
GHz	H/V	cm	deg	dB μ V/m	dB μ V/m
3.700	V	105	123	58.1	83.1
7.400	V	122	334	72.3	83.1
9.251	V	100	162	63.9	83.1
11.101	V	106	113	72.9	83.1
12.952	V	101	071	77.1	83.1
14.802	V	100	136	70.6	83.1
16.652	V	100	137	63.3	83.1

EUT Tx on Middle Channel (1880.0MHz)

Measurements were made with the EUT in PCS 1900MHz.

Frequency	Antenna Polarisation	Height	Azimuth	Peak Field Strength	Specification Limit
GHz	H/V	cm	deg	dB μ V/m	dB μ V/m
3.760	V	106	276	58.7	83.5
5.640	V	100	112	61.0	83.5
7.520	V	107	326	72.1	83.5
9.400	V	100	111	65.3	83.5
11.280	V	100	336	77.6	83.5
13.159	V	110	022	73.0	83.5
15.040	V	103	134	69.5	83.5



2.6 RADIATED EMISSIONS - continued

2.6.6 Test Results - continued

EUT Tx on Top Channel (1909.8MHz)

Measurements were made with the EUT in PCS 1900MHz.

Frequency GHz	Antenna Polarisation	Height cm	Azimuth deg	Peak Field Strength dB μ V/m	Specification Limit dB μ V/m
3.820	H	100	281	68.2	83.3
5.729	H	100	185	56.8	83.3
7.639	H	100	238	72.3	83.3
9.549	V	121	103	62.2	83.3
11.459	V	100	217	79.1	83.3
13.369	V	100	192	70.5	83.3
15.278	V	100	192	67.7	83.3

ABBREVIATIONS FOR ABOVE TABLES

H Horizontal Polarisation

V Vertical Polarisation



2.6 RADIATED EMISSIONS - continued

2.6.7 Set Up Photograph



Radiated Emissions Set Up Photograph



2.7 CONDUCTED EMISSIONS ON POWER LINES

2.7.1 FCC CFR 47: Part 15 Subpart C, Section 15.207

2.7.2 Equipment Under Test

MX-V30

2.7.3 Date of Test

26th April 2004

2.7.4 Test Equipment Used (See Section 3.1 for details)

Items 21, 22, 27, 28, 29, 31

2.7.5 Test Procedure

Test performed in accordance with ANSI C63.4.

Conducted Emission Measurements were undertaken within the semi-anechoic chamber. Emissions were measured on the Live and Neutral Lines in turn.

Emissions were formally measured using a Quasi-Peak and Average Detectors, which meet the CISPR requirements. The details of the worst-case emissions for the Live and Neutral Lines are presented in the following tables.

The EUT was supplied from a 120V, 60Hz supply.



2.7 CONDUCTED EMISSIONS ON POWER LINES - continued

2.7.6 Test Results

The EUT met the Class B requirements of FCC CFR 47: Part 15 Subpart C, Section 15.207 for Conducted Emissions on the Live and Neutral Lines.

EUT Tx on Bottom Channel (1850.2MHz) – Live Line

Measurements were made with the EUT in PCS 1900MHz. (Phone In Call and Charging)

Emission Frequency (MHz)	Quasi-Peak Level (dB μ V)	Quasi-Peak Limit (dB μ V)	Average Level (dB μ V)	Average Limit (dB μ V)
1.252	41.0	56.0	36.1	46.0
1.424	42.8	56.0	36.3	46.0
1.484	42.7	56.0	37.4	46.0
2.611	44.3	56.0	37.7	46.0
2.730	45.3	56.0	37.6	46.0
2.848	43.0	56.0	36.6	46.0

The margin between the specification requirements and all other emissions were 10.0dB or more below the specified Quasi-Peak limit and 14.0dB or more below the Average limit.

EUT Tx on Bottom Channel (1850.2MHz) – Neutral Line

Measurements were made with the EUT in PCS 1900MHz. (Phone In Call and Charging)

Emission Frequency (MHz)	Quasi-Peak Level (dB μ V)	Quasi-Peak Limit (dB μ V)	Average Level (dB μ V)	Average Limit (dB μ V)
0.655	42.7	56.0	34.8	46.0
0.952	43.6	56.0	35.4	46.0
1.250	44.3	56.0	35.8	46.0
1.488	43.8	56.0	35.3	46.0
2.618	43.8	56.0	34.7	46.0
2.677	44.3	56.0	35.6	46.0
2.853	44.2	56.0	34.7	46.0

The margin between the specification requirements and all other emissions were 12.9dB or more below the specified Quasi-peak limit and 11.8dB or more below the specified Average limit.



2.7 CONDUCTED EMISSIONS ON POWER LINES - continued

2.7.6 Test Results

EUT Rx on Middle Channel (1880.0MHz) – Live Line

Measurements were made with the EUT in PCS 1900MHz. (Phone Idle and Charging)

Emission Frequency (MHz)	Quasi-Peak Level (dB μ V)	Quasi-Peak Limit (dB μ V)	Average Level (dB μ V)	Average Limit (dB μ V)
0.715	40.8	56.0	36.7	46.0
0.953	41.6	56.0	37.3	46.0
1.487	42.4	56.0	37.3	46.0
2.736	44.6	56.0	37.8	46.0
2.736	44.8	56.0	37.9	46.0
2.795	45.1	56.0	37.4	46.0

The margin between the specification requirements and all other emissions were 13.7dB or more below the specified Quasi-Peak limit and 9.5dB or more below the Average limit.

EUT Rx on Middle Channel (1880.0MHz) – Neutral Line

Measurements were made with the EUT in PCS 1900MHz. (Phone Idle and Charging)

Emission Frequency (MHz)	Quasi-Peak Level (dB μ V)	Quasi-Peak Limit (dB μ V)	Average Level (dB μ V)	Average Limit (dB μ V)
0.714	44.9	56.0	37.2	46.0
1.250	45.4	56.0	37.5	46.0
1.486	45.2	56.0	37.2	46.0
1.545	44.1	56.0	36.4	46.0
2.674	46.4	56.0	38.6	46.0
2.852	46.3	56.0	37.3	46.0

The margin between the specification requirements and all other emissions were 12.0dB or more below the specified Quasi-peak limit and 9.6dB or more below the specified Average limit.



2.7 CONDUCTED EMISSIONS ON POWER LINES - continued

2.7.7 Set Up Photographs



Conducted Emissions Set Up Photograph

**2.8 CONDUCTED SPURIOUS EMISSIONS****2.8.1 FCC CFR 47: Part 24 Subpart E, Section 24.238(a)****2.8.2 Equipment Under Test**

MX-V30

2.8.3 Date of Test27th April 2004**2.8.4 Test Equipment Used (See Section 3.1 for details)**

2, 3, 4, 5, 6, 7, 8

2.8.5 Test Procedure

In accordance with Part 2.1051, the spurious emissions from the antenna terminal were measured. The transmitter output power was attenuated using a combination of filters and attenuators and the frequency spectrum investigated from 9kHz to 20 GHz. The EUT was set to transmit on full power with timeslot 3 active and minimum power with timeslot 3 active. The EUT was tested on Bottom, Middle and Top channels for both power levels. The resolution and video bandwidths were set to 1MHz in accordance with Part 24.238. The spectrum analyser detector was set to Max Hold.

For measuring the range 9kHz to 4GHz, on maximum power, a 10dB attenuator was used. From 4 to 20GHz, attenuators and a high pass filter were used.

The maximum path loss across the measurement band was used as the reference level offset to ensure worst case

In addition, measurements were made up to the 10th harmonic of the fundamental.

For GPRS, all test conditions were the same except 2 timeslots were active, (3 and 4).


2.8.6 Test Results

The EUT passed the requirements laid out in 24.238. The plots on the following pages show the frequency spectrum from 9kHz to 20GHz of the EUT.



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (9kHz – 4GHz) Channel 512 (1850.2MHz) - Maximum Power

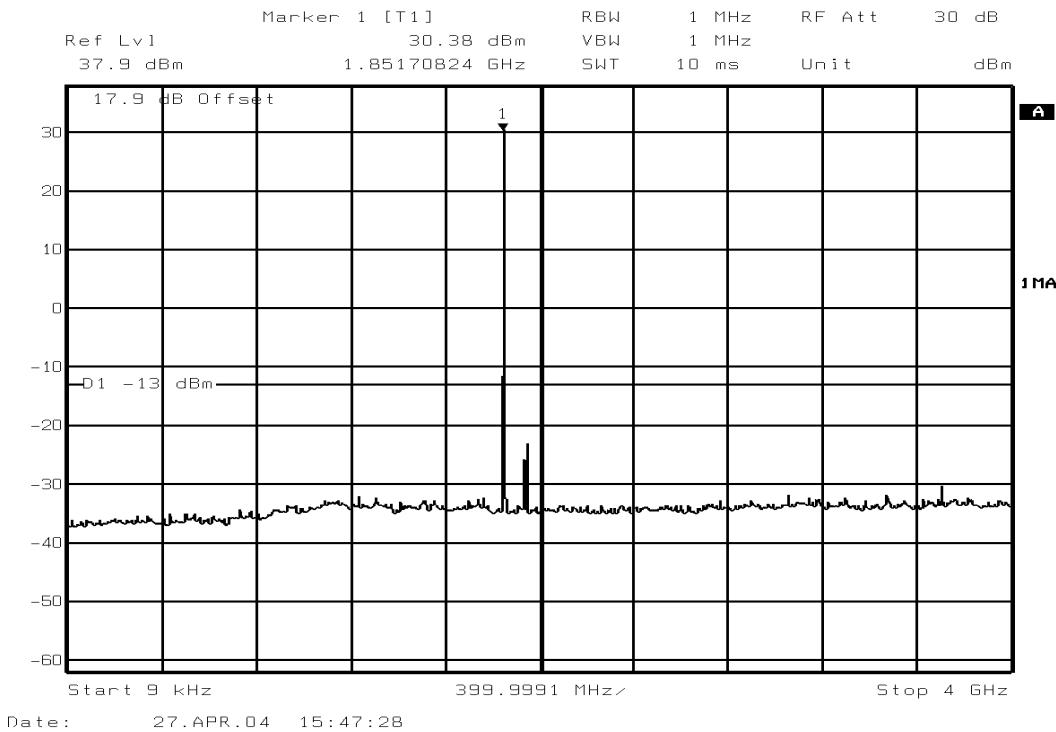


GSM – Circuit Switched



2.8 CONDUCTED SPURIOUS EMISSIONS – Continued

Spurious Emissions (4GHz – 12GHz)
Channel 512 (1850.2MHz) – Maximum Power

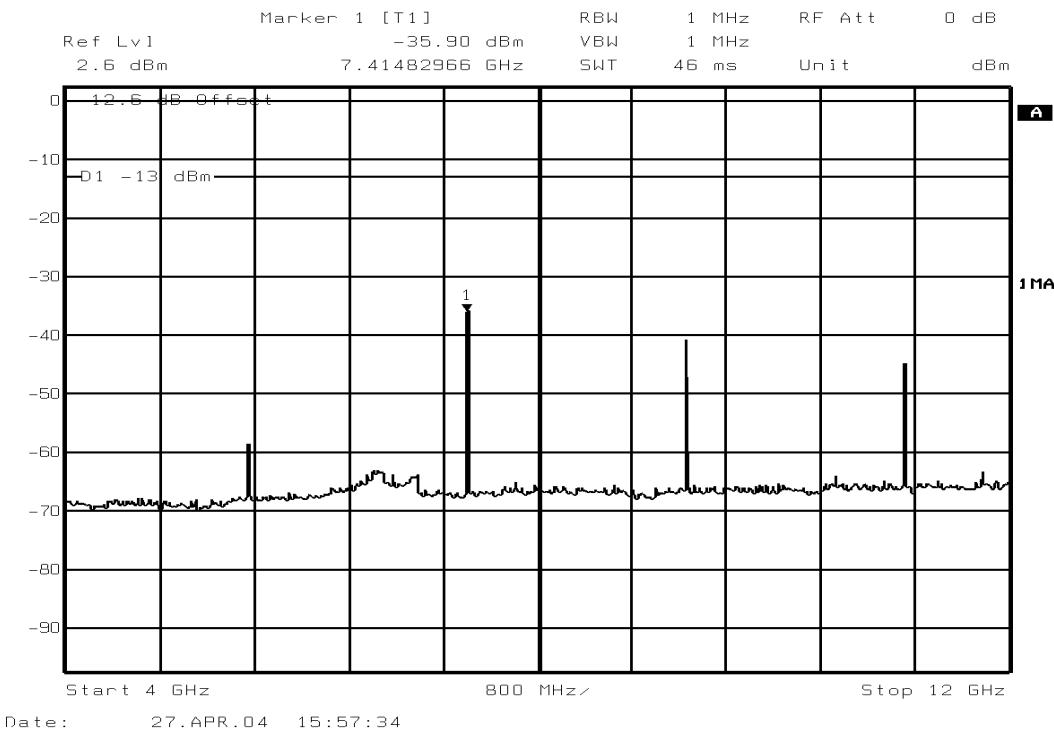


GSM – Circuit Switched



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (12GHz – 20GHz) Channel 512 (1850.2MHz) – Maximum Power

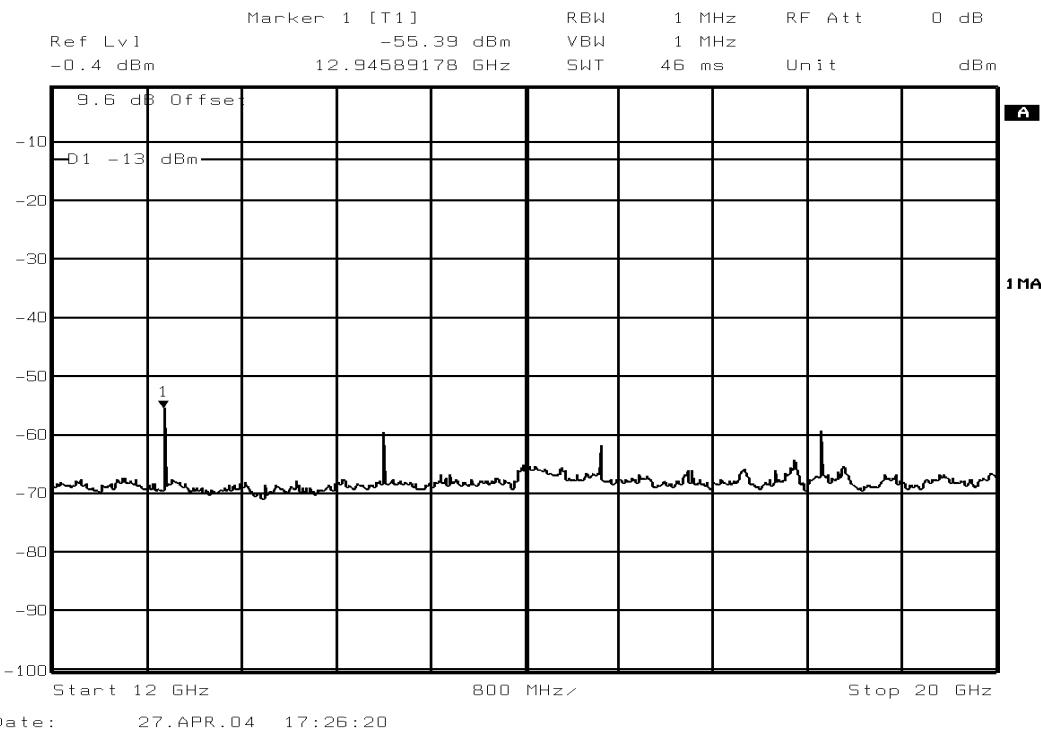


GSM – Circuit Switched



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (9kHz – 4GHz) Channel 661 (1880.0MHz) – Maximum Power

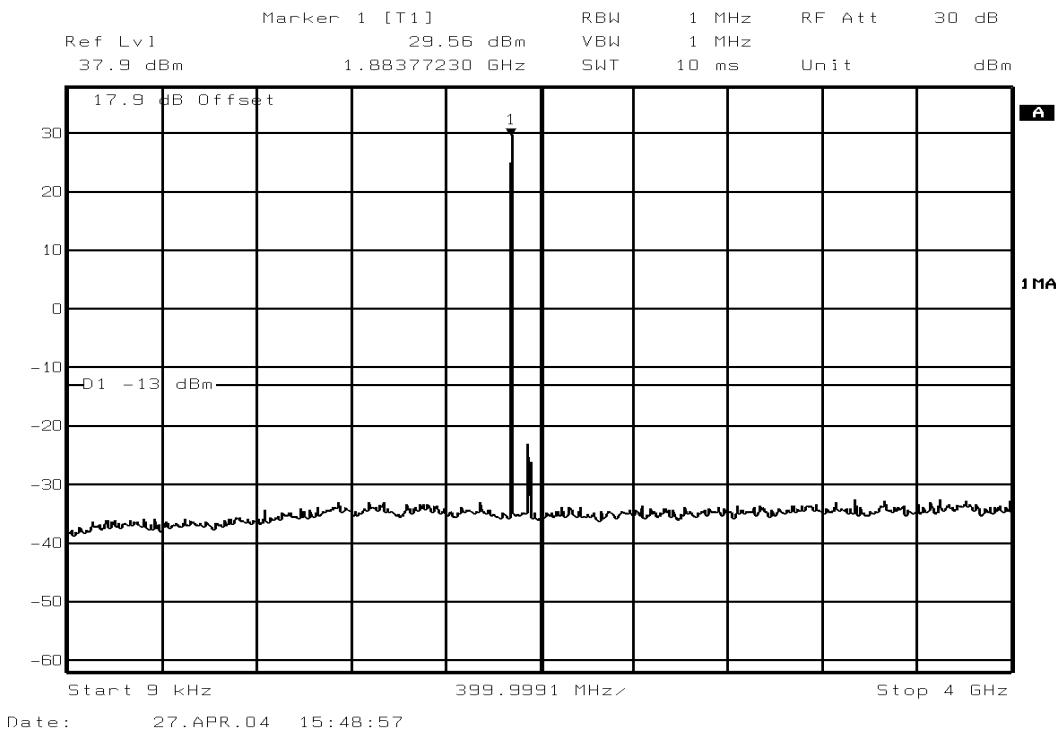


GSM – Circuit Switched



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (4GHz - 12GHz)
Channel 661 (1880.0MHz) – Maximum Power

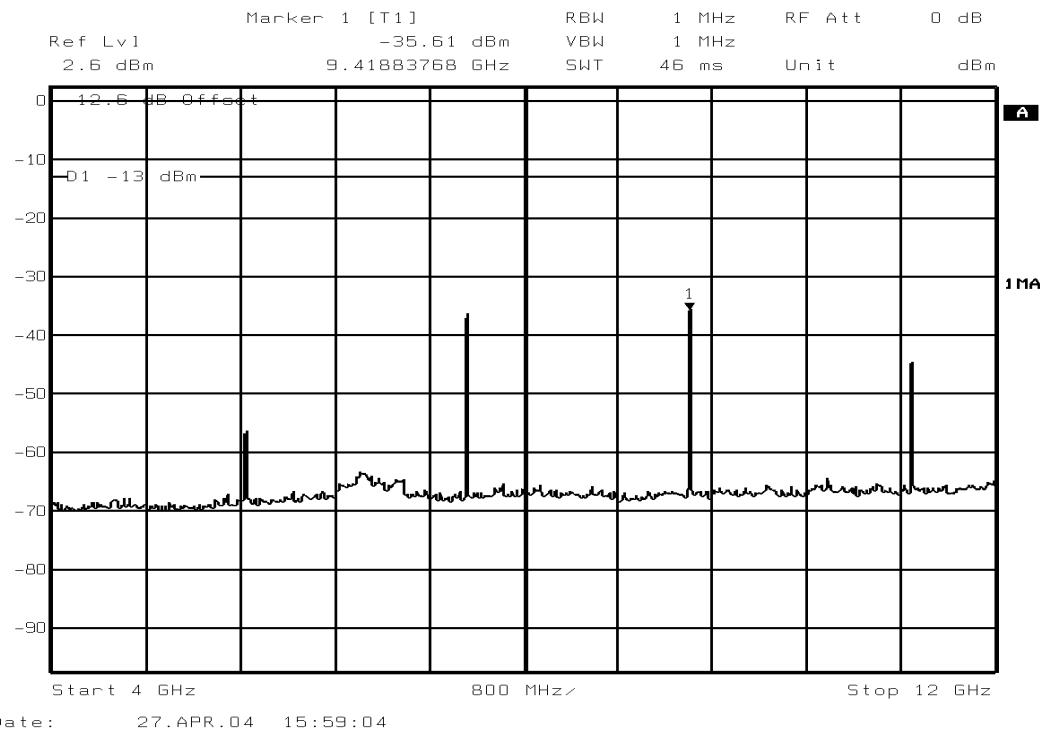


GSM – Circuit Switched



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (12GHz – 20GHz)
Channel 661 (1880.0MHz) – Maximum Power

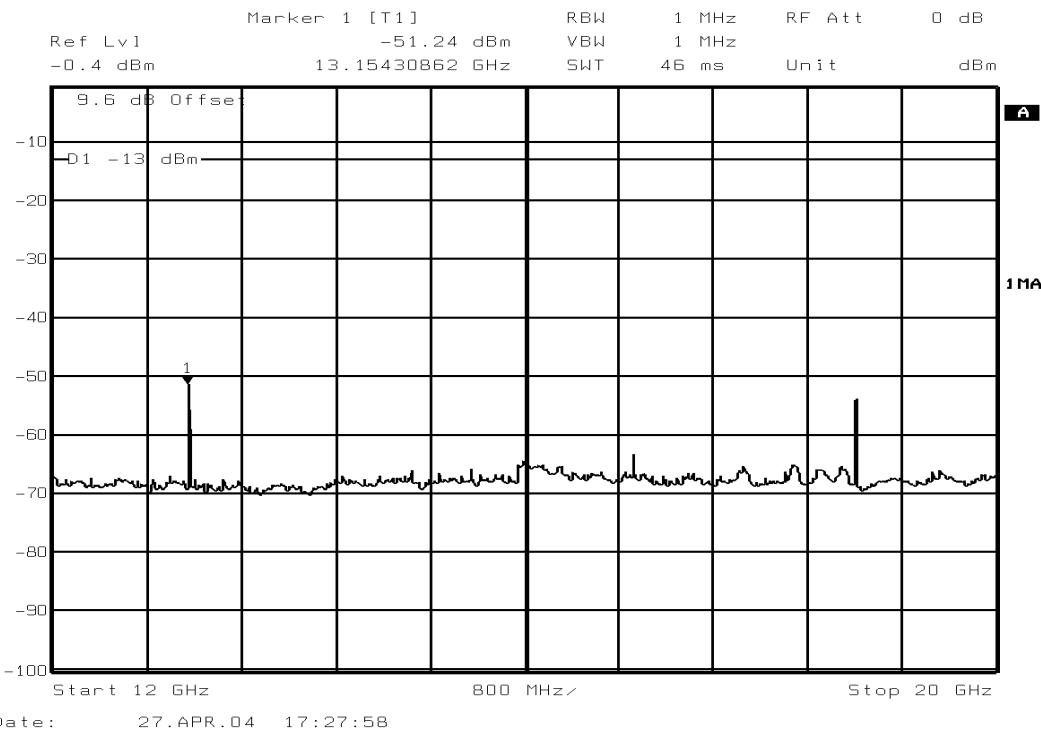


GSM – Circuit Switched



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (9kHz – 4GHz) Channel 810 (1909.8MHz) – Maximum Power

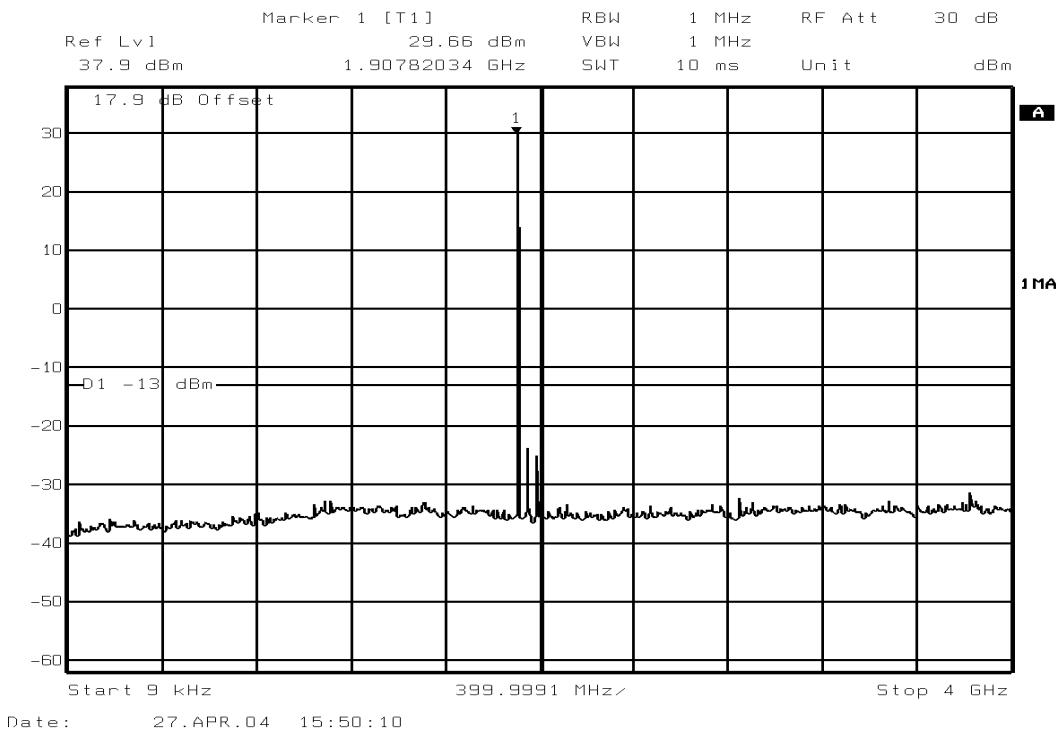


GSM – Circuit Switched



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (4GHz – 12GHz)
Channel 810 (1909.8MHz) – Maximum Power

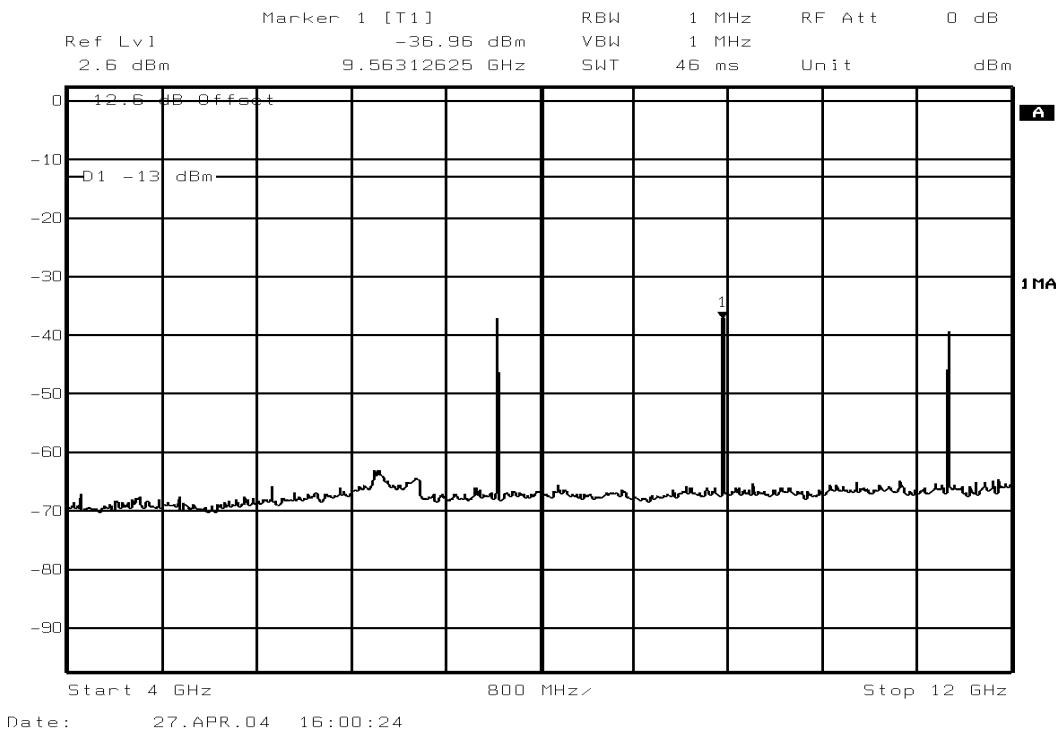


GSM – Circuit Switched



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (12GHz – 20GHz)
Channel 810 (1909.8MHz) – Maximum Power

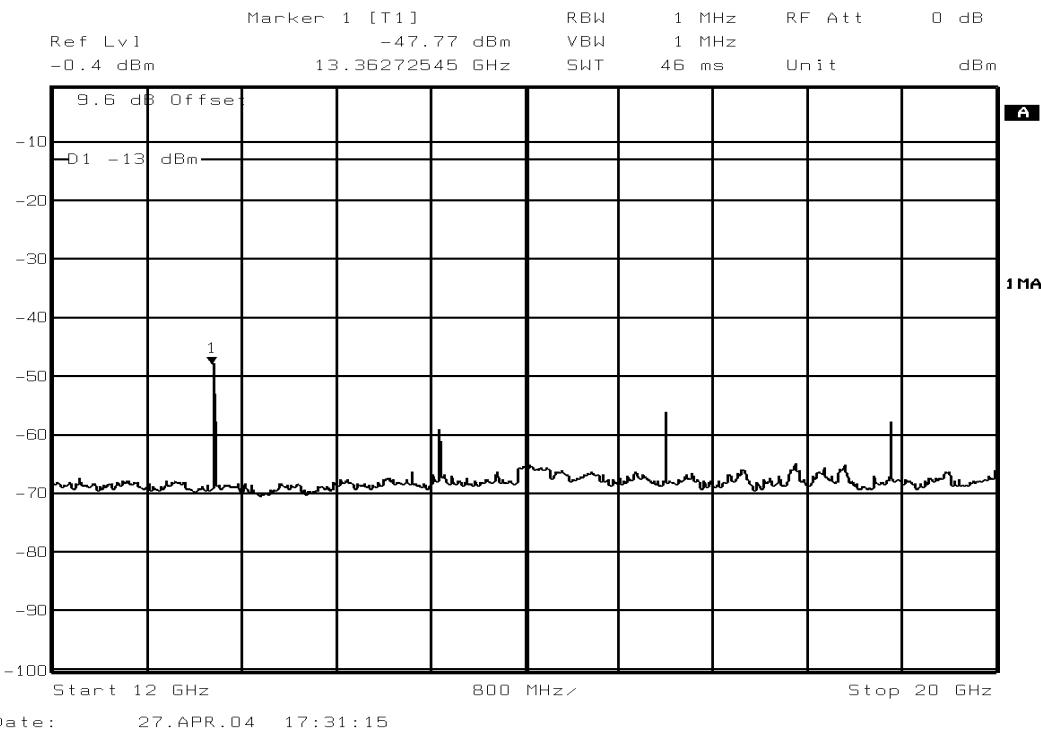


GSM – Circuit Switched



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (9kHz – 4GHz)
Channel 512 (1850.2MHz) – Minimum Power

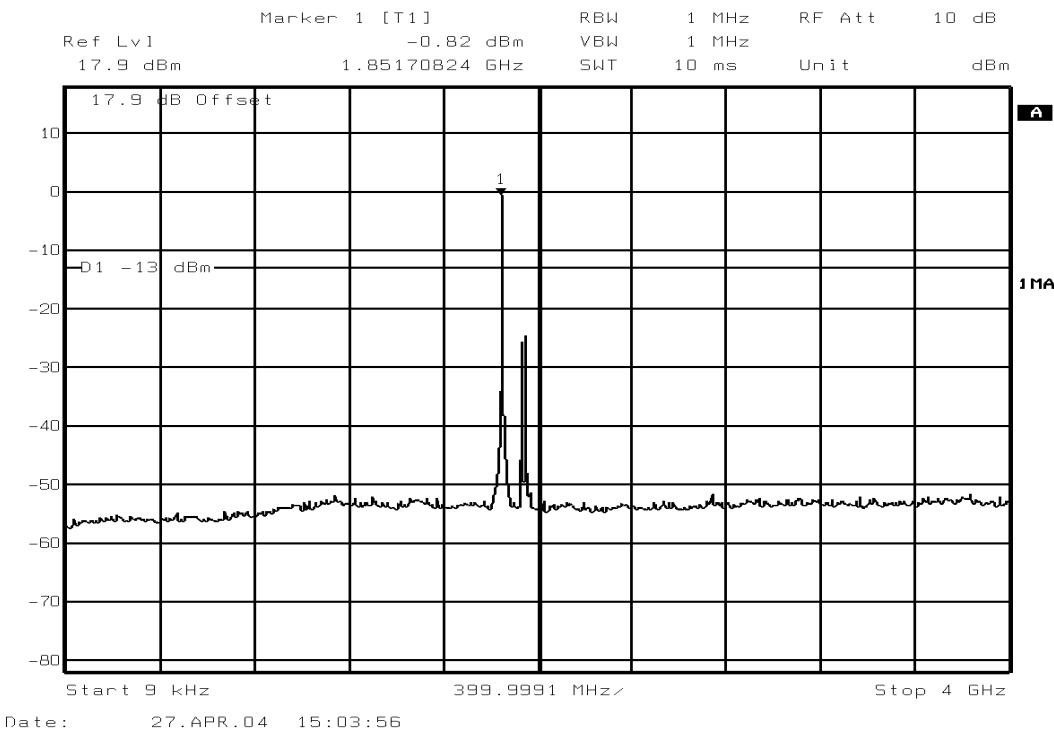


GSM – Circuit Switched



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (4GHz – 12GHz)
Channel 512 (1850.2MHz) – Minimum Power

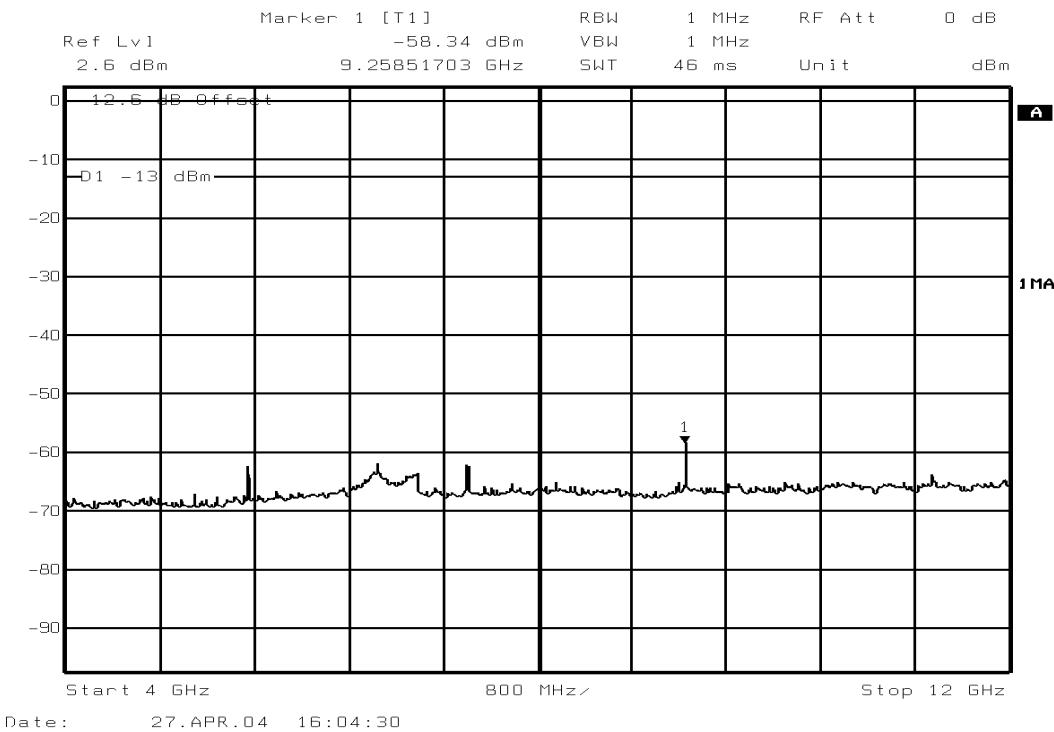


GSM – Circuit Switched



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (12GHz-20GHz)
Channel 512 (1850.2MHz) – Minimum Power

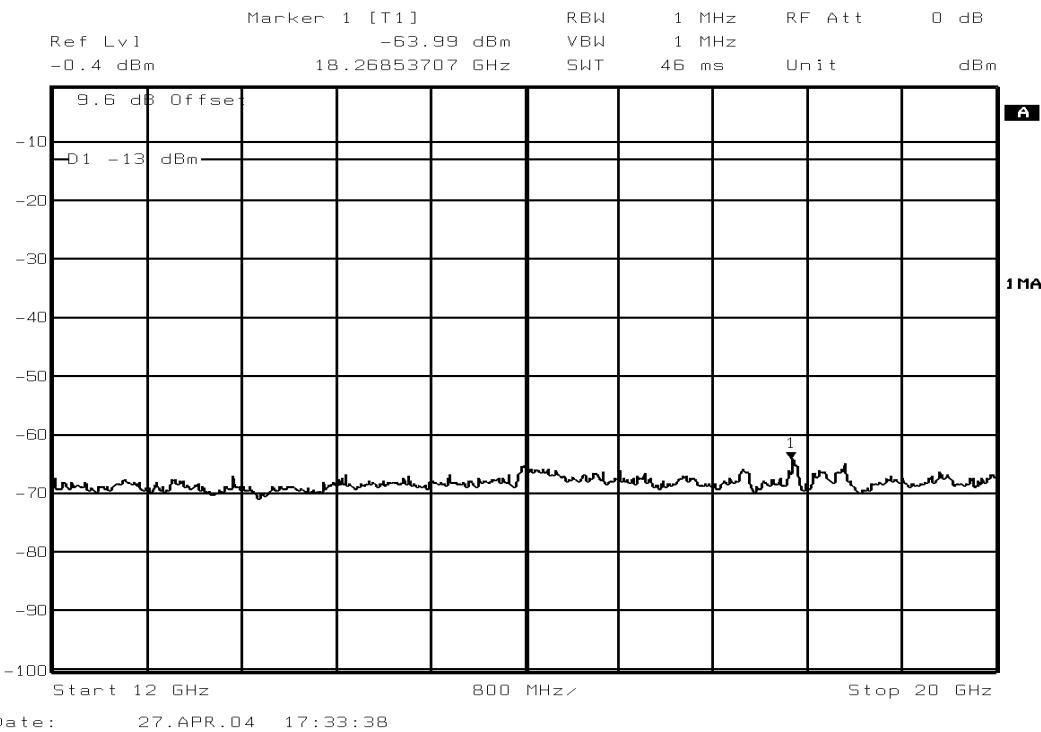


GSM – Circuit Switched



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (9kHz – 4GHz)
Channel 661 (1880.0MHz) – Minimum Power

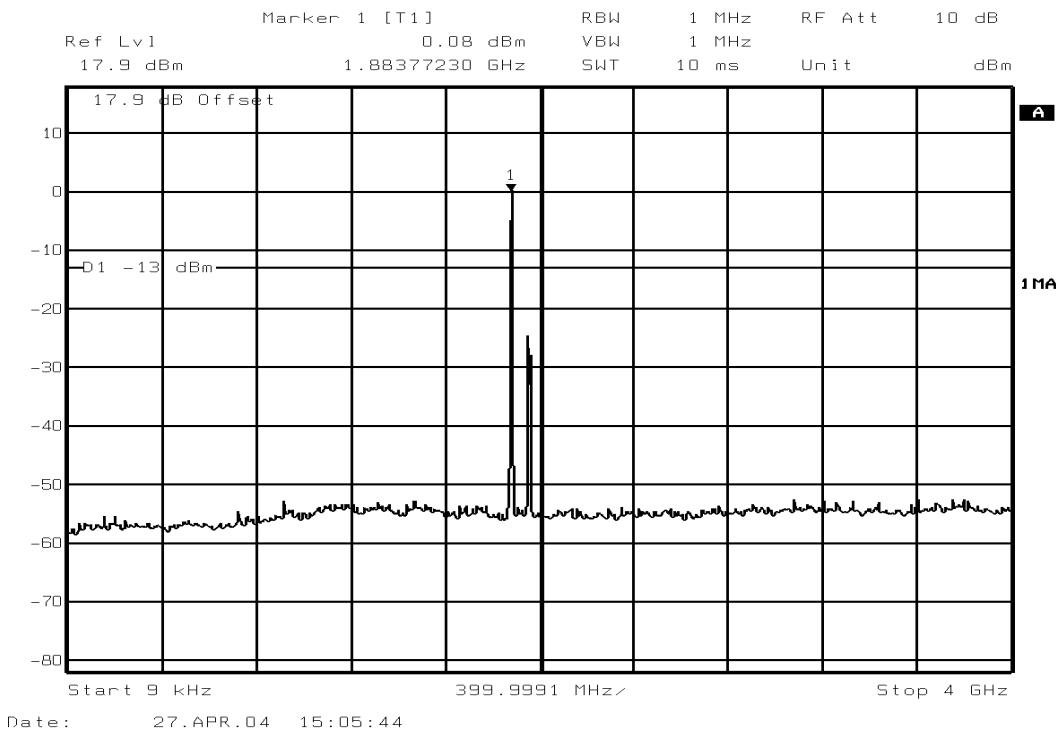


GSM – Circuit Switched



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (4GHz – 12GHz)
Channel 661 (1880.0MHz) – Minimum Power

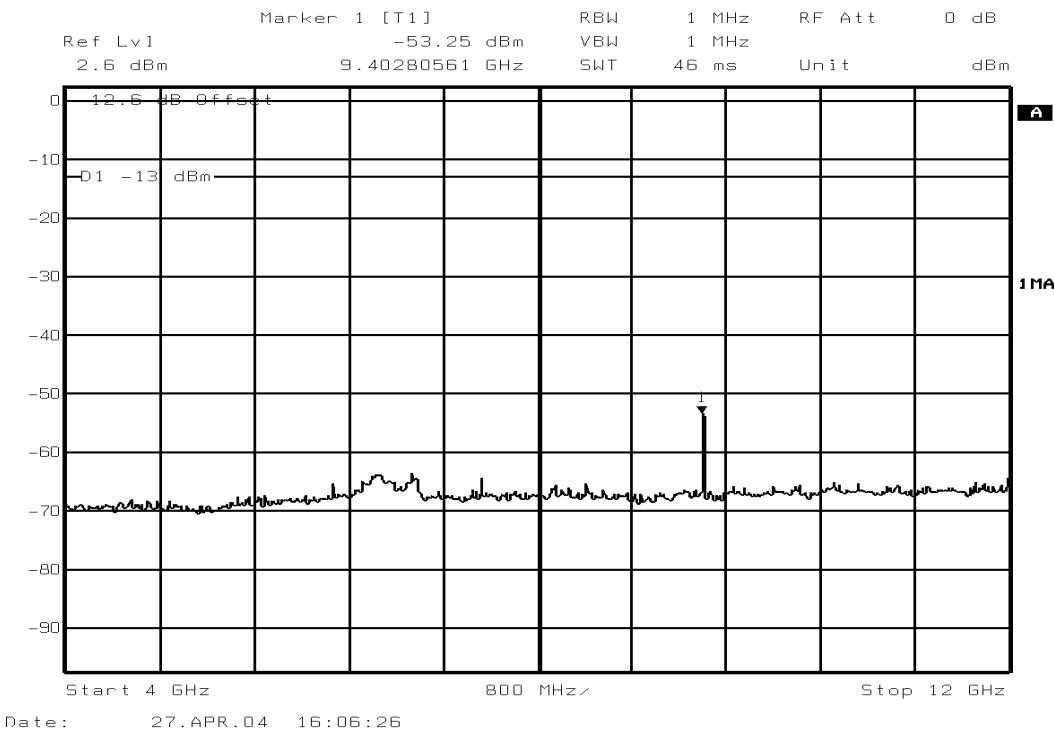


GSM – Circuit Switched



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (12GHz – 20GHz)
Channel 661 (1880.0MHz) – Minimum Power

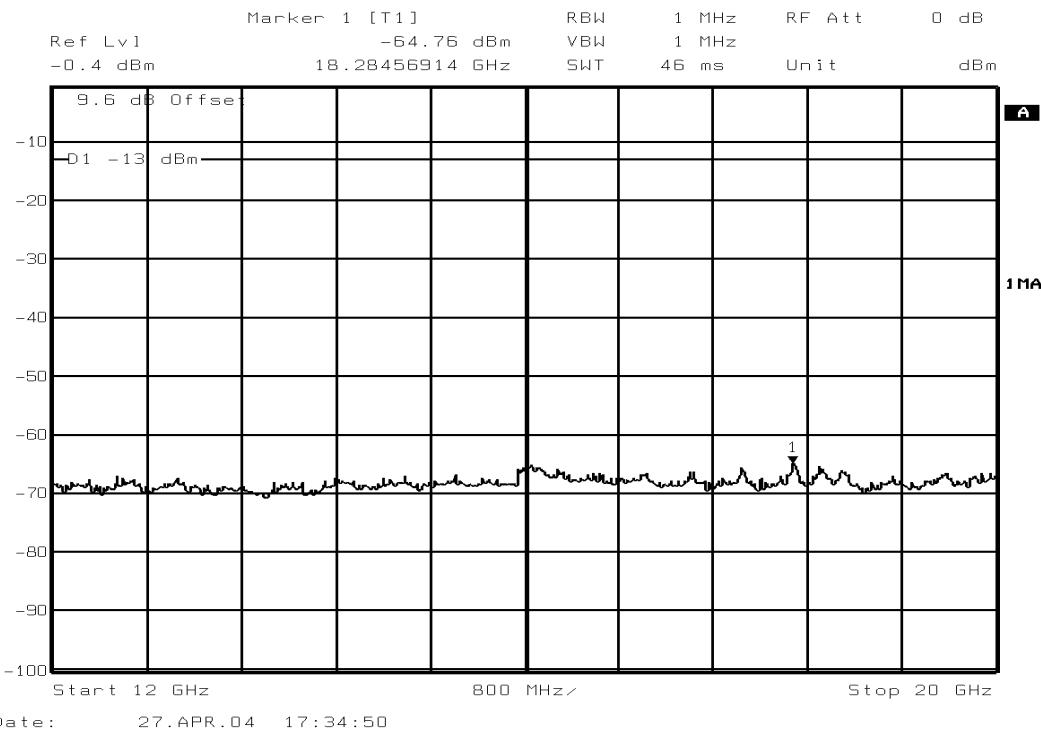


GSM – Circuit Switched



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (9kHz – 4GHz) Channel 810 (1909.8MHz) – Minimum Power

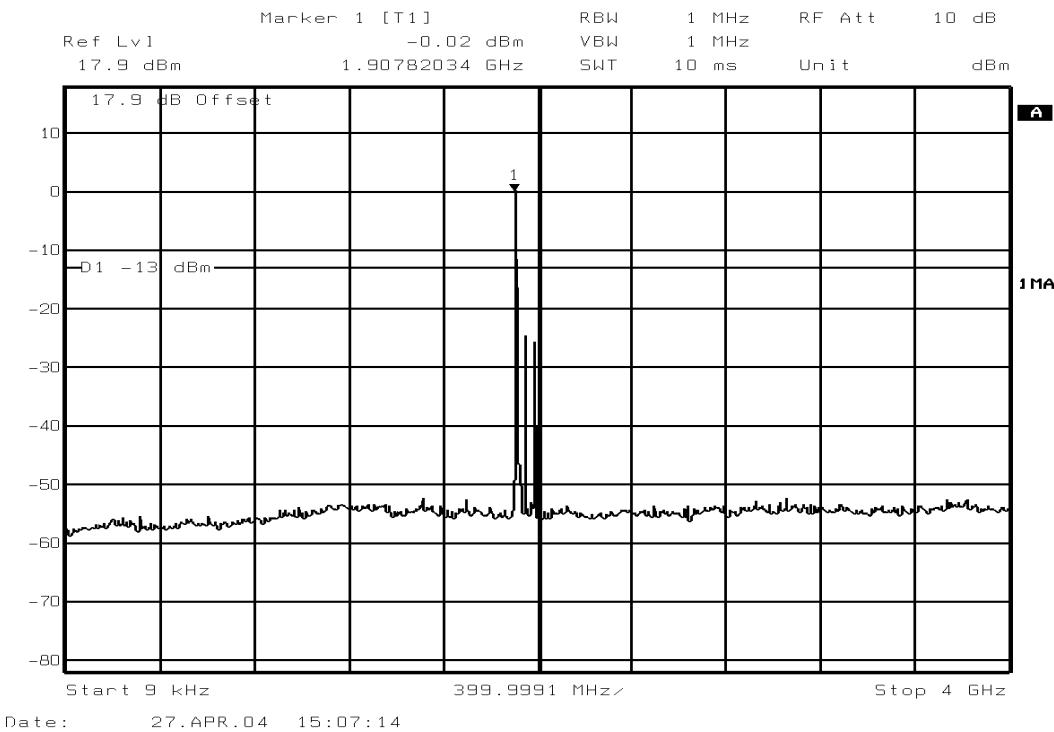


GSM – Circuit Switched



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (4GHz – 12GHz) Channel 810 (1909.8MHz) – Minimum Power

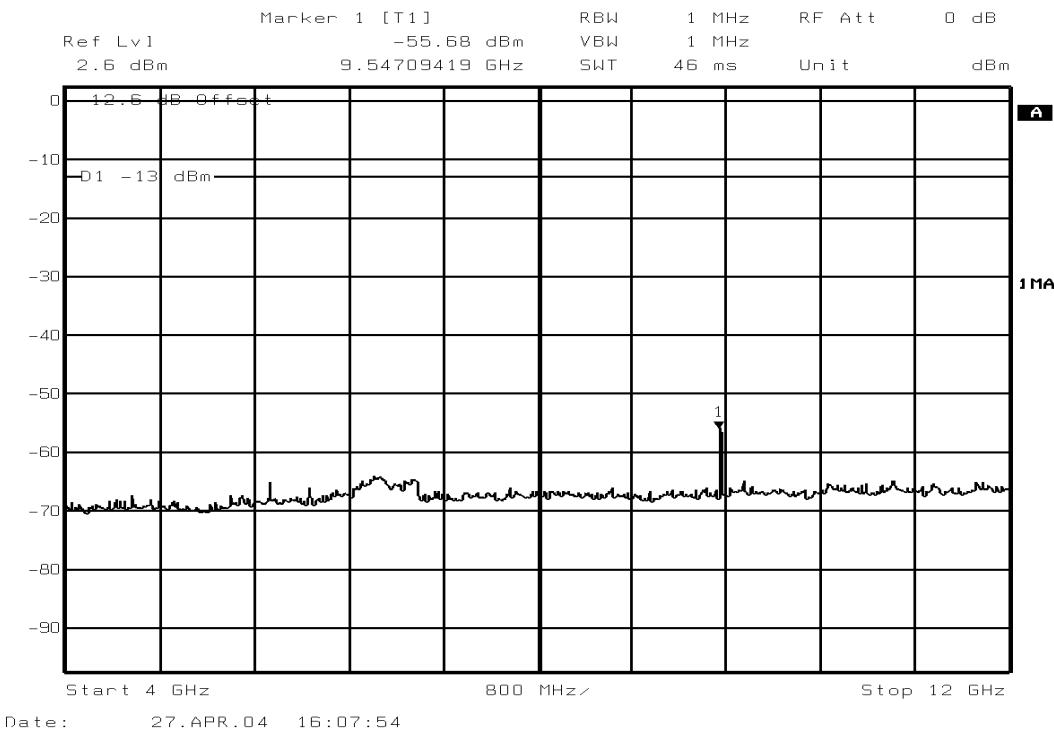


GSM – Circuit Switched



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (12GHz – 20GHz)
Channel 810 (1909.8MHz) – Minimum Power

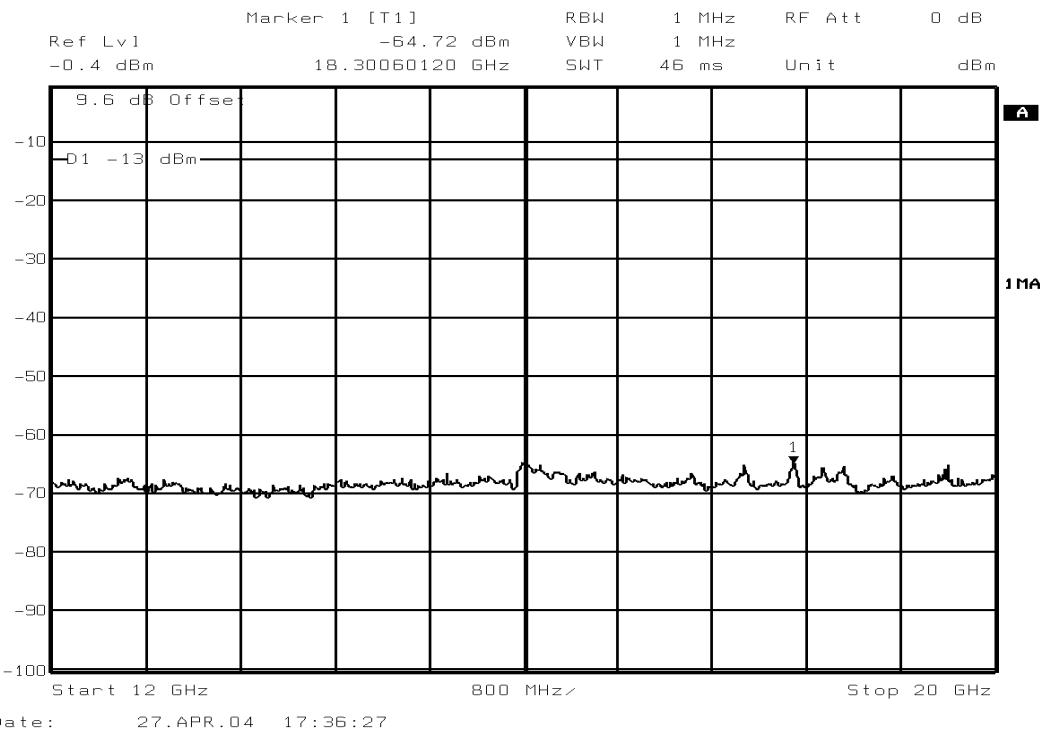


GSM – Circuit Switched



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (9kHz – 4GHz)
Channel 512 (1850.2MHz) - Maximum Power

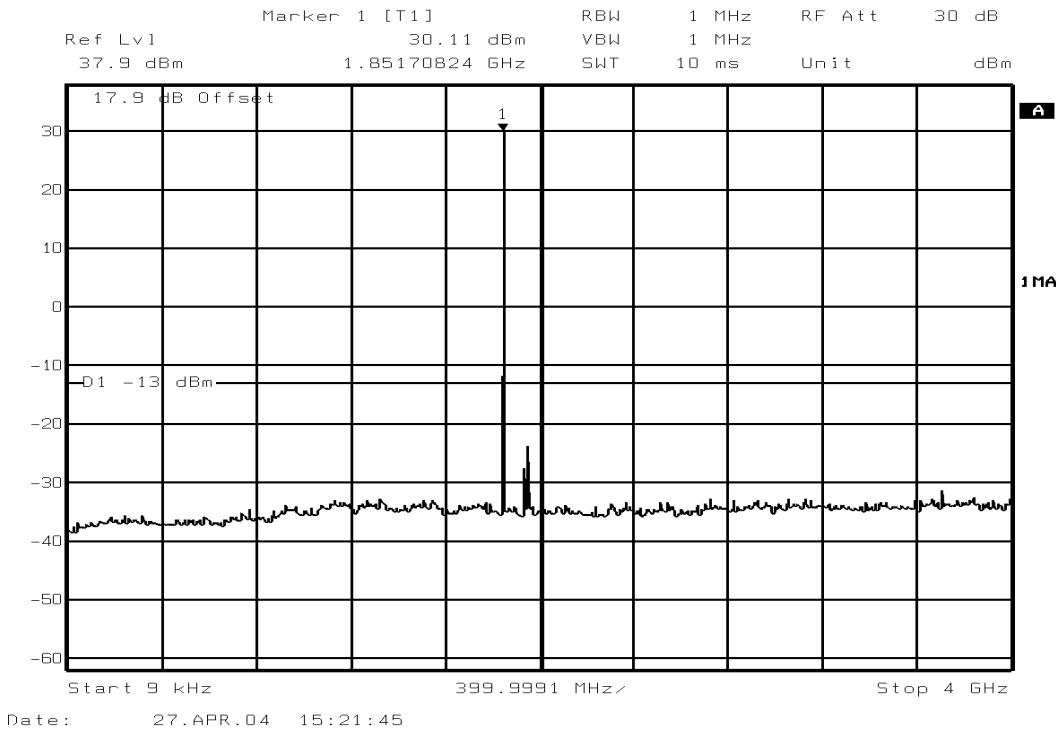


GPRS – Packet Data



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (4GHz – 12GHz) Channel 512 (1850.2MHz) – Maximum Power

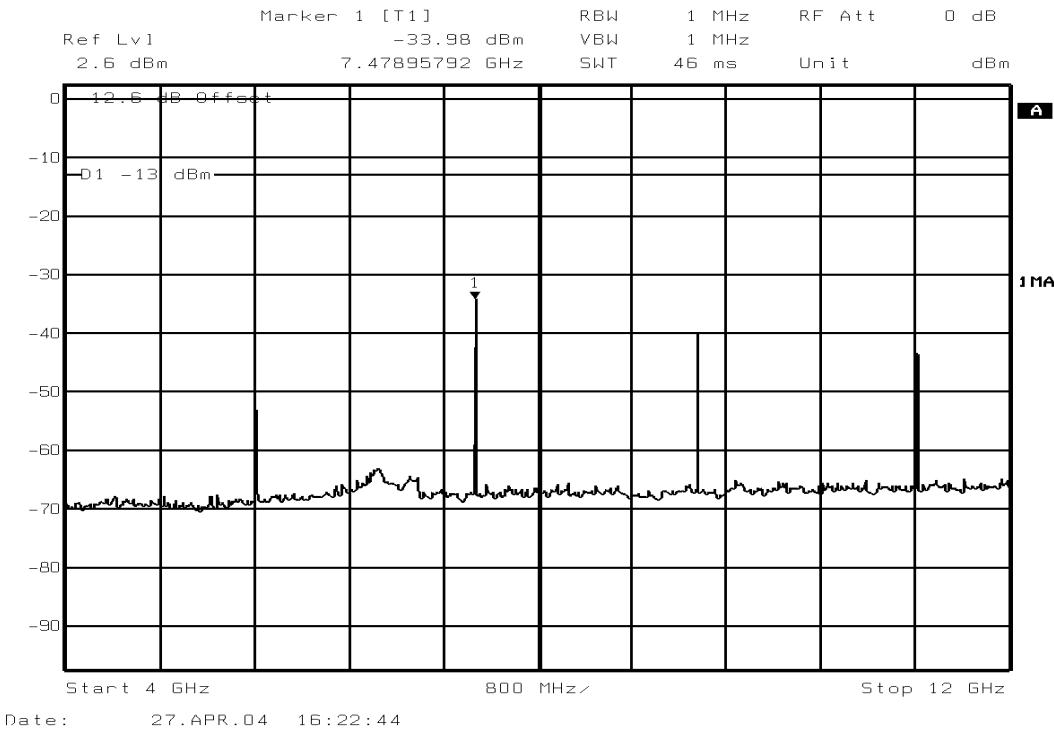


GPRS – Packet Data



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (12GHz – 20GHz) Channel 512 (1850.2MHz) – Maximum Power

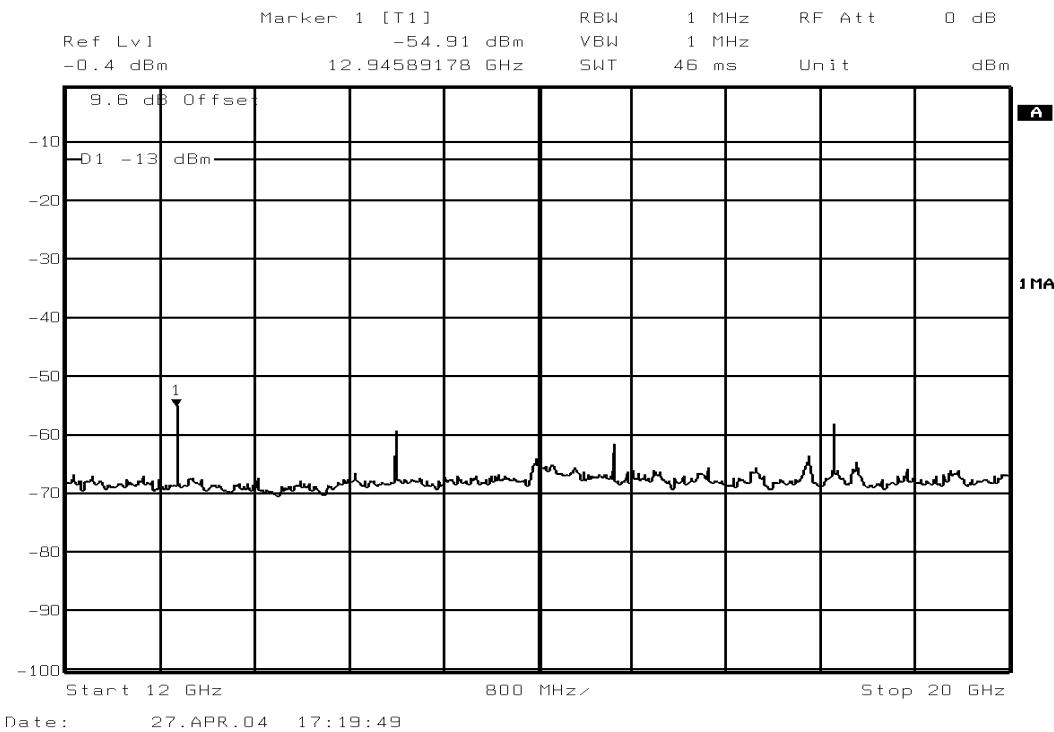


GPRS – Packet Data



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (9kHz – 4GHz)
Channel 661 (1880.0MHz) – Maximum Power

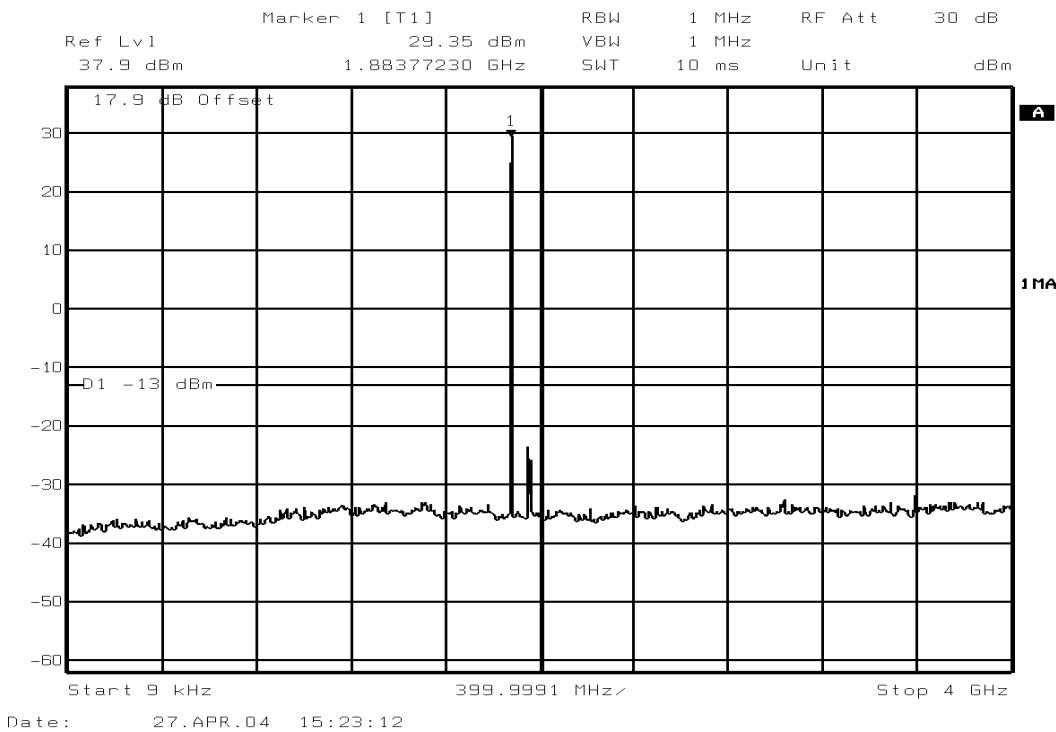


GPRS – Packet Data



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (4GHz - 12GHz)
Channel 661 (1880.0MHz) – Maximum Power

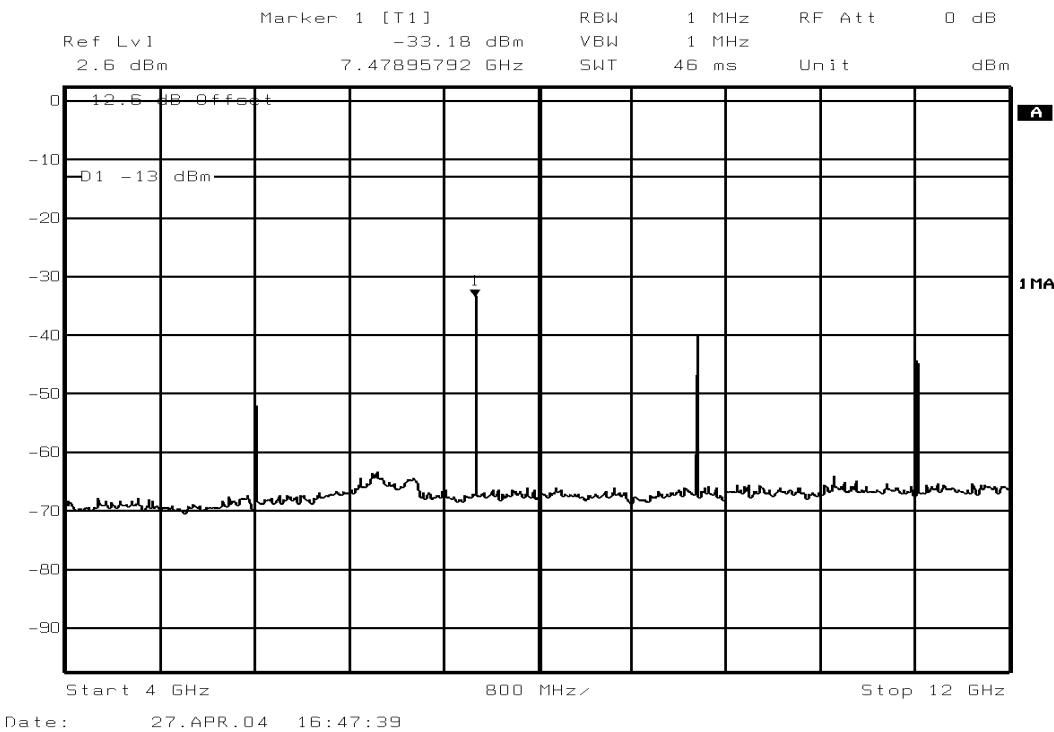


GPRS – Packet Data



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (12GHz – 20GHz)
Channel 661 (1880.0MHz) – Maximum Power

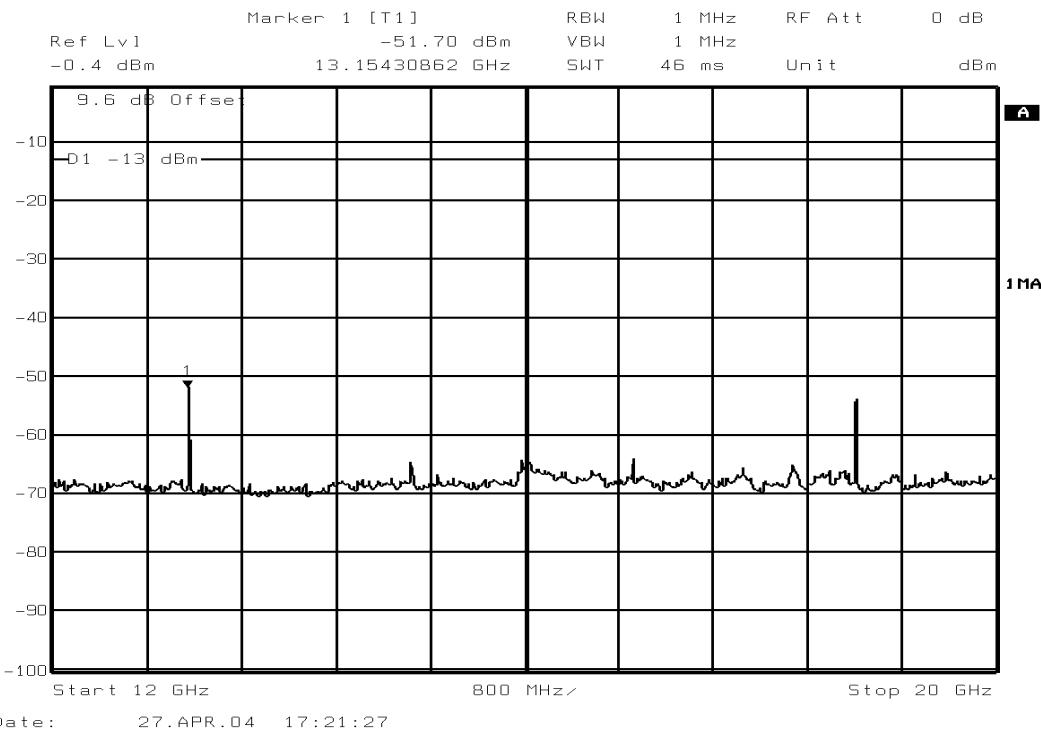


GPRS – Packet Data



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (9kHz – 4GHz)
Channel 810 (1909.8MHz) – Maximum Power

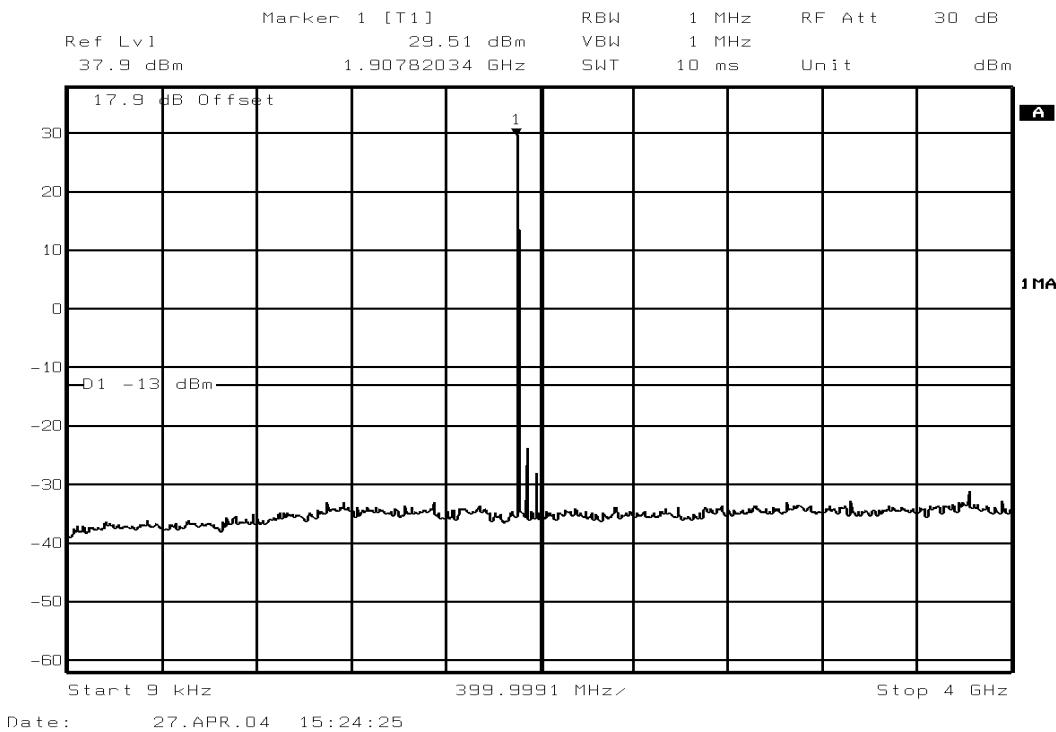


GPRS – Packet Data



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (4GHz – 12GHz)
Channel 810 (1909.8MHz) – Maximum Power

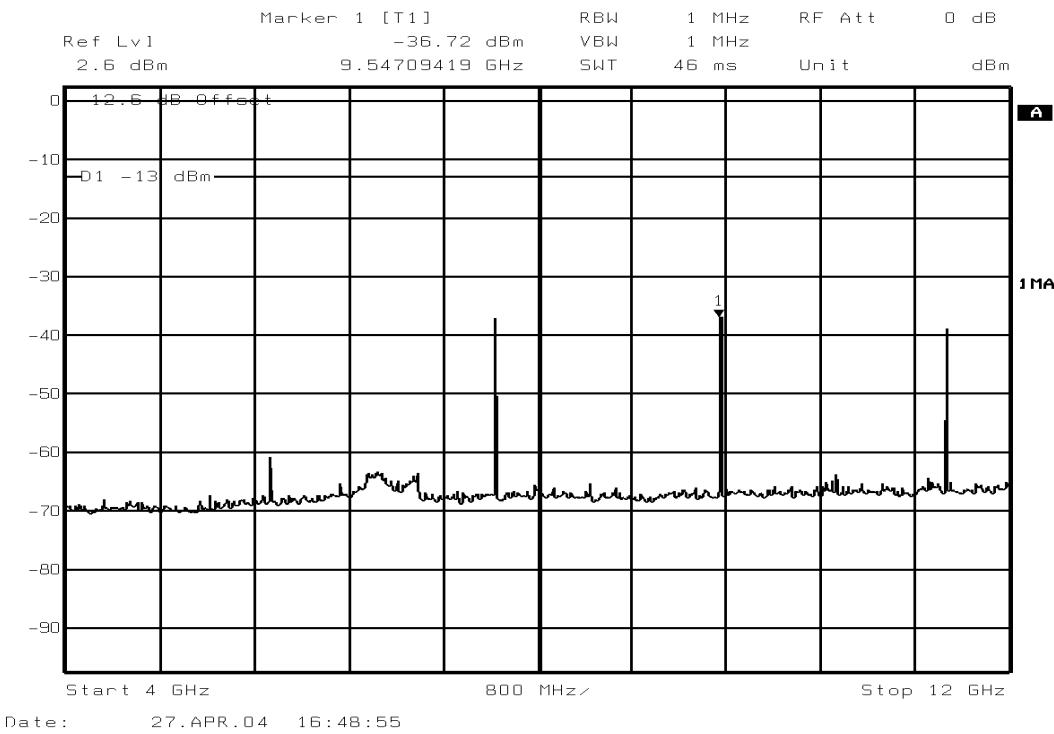


GPRS – Packet Data



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (12GHz – 20GHz)
Channel 810 (1909.8MHz) – Maximum Power

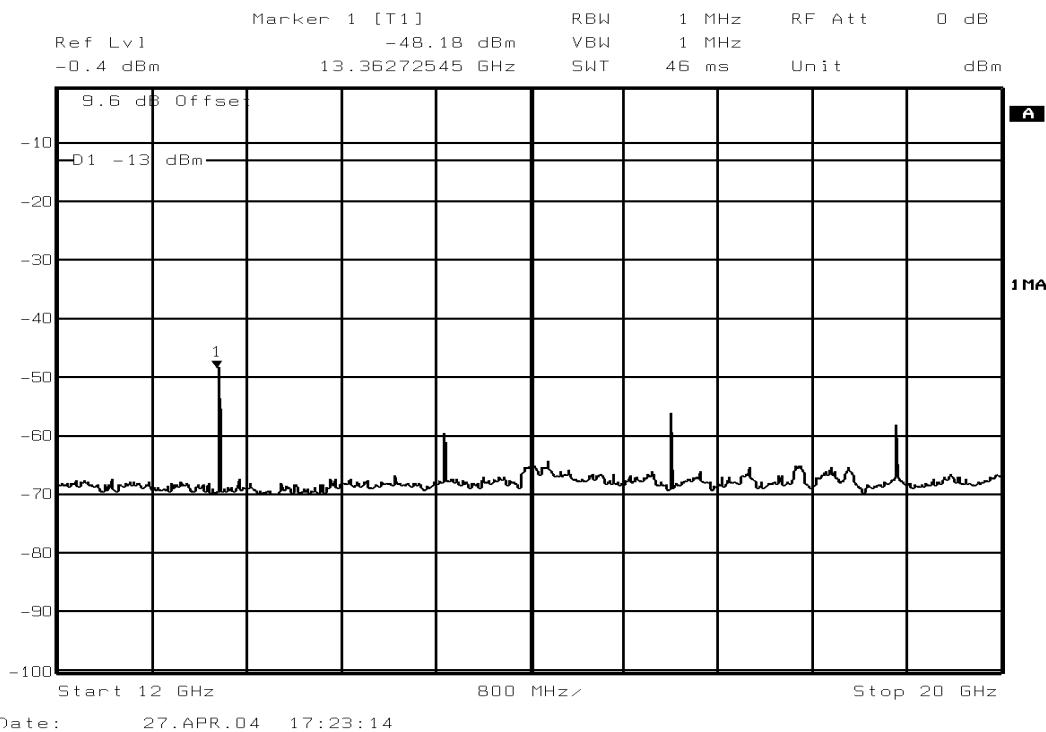


GPRS – Packet Data



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (9kHz – 4GHz)
Channel 512 (1850.2MHz) – Minimum Power

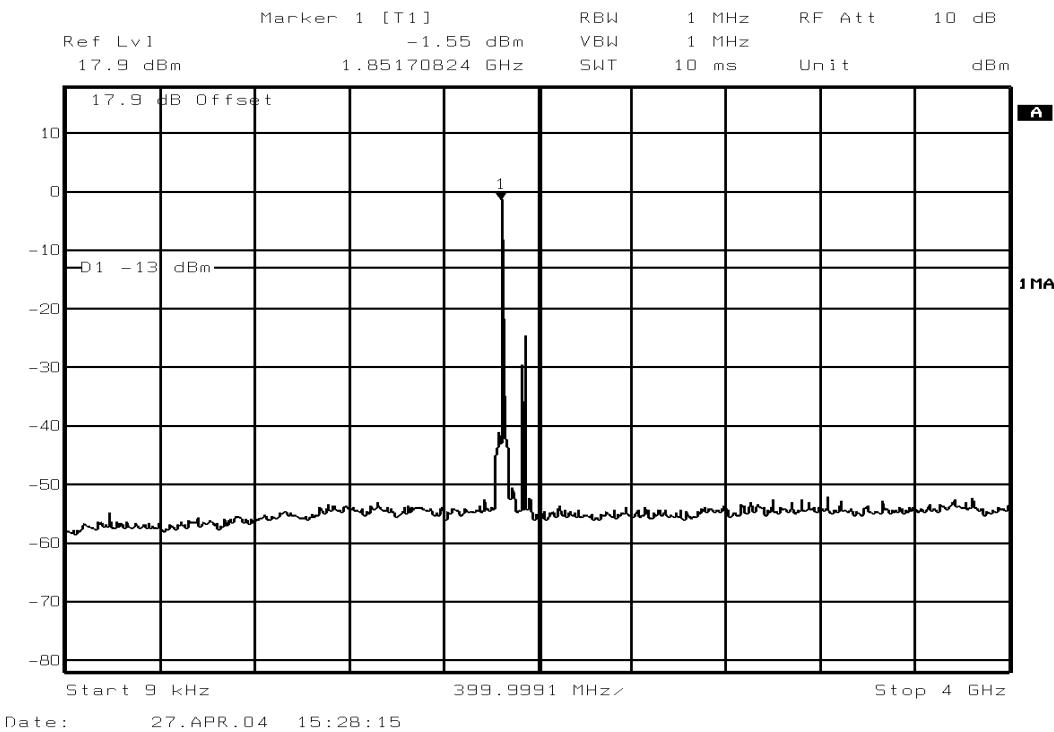


GPRS – Packet Data



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (4GHz – 12GHz)
Channel 512 (1850.2MHz) – Minimum Power

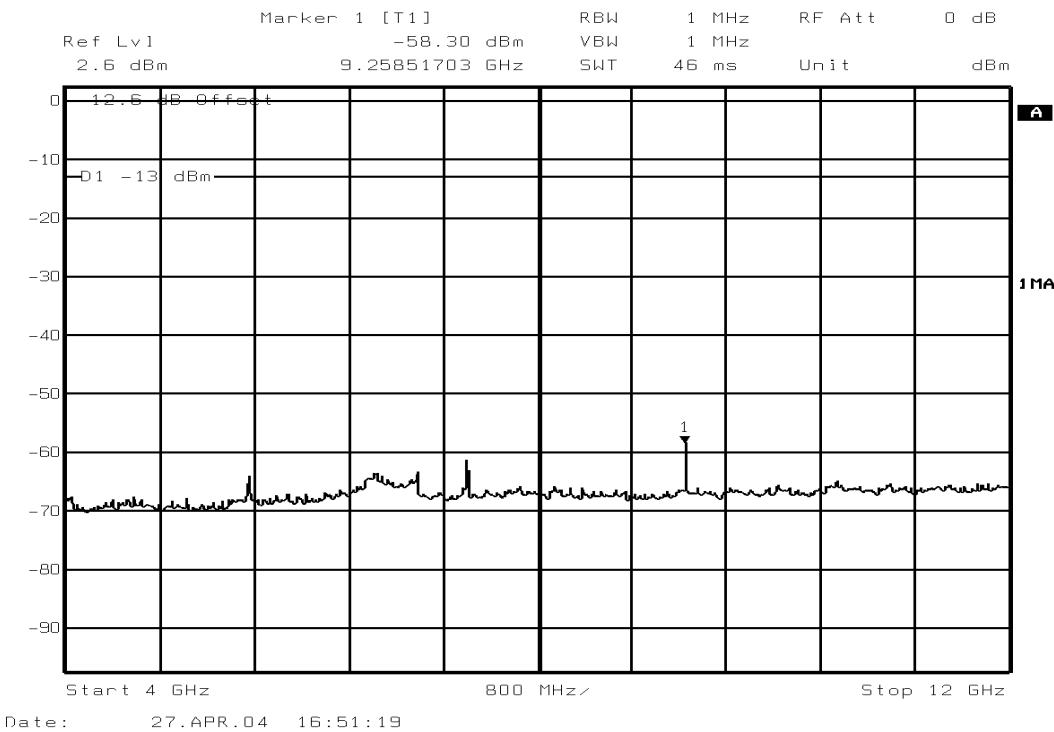


GPRS – Packet Data



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (12GHz-20GHz)
Channel 512 (1850.2MHz) – Minimum Power

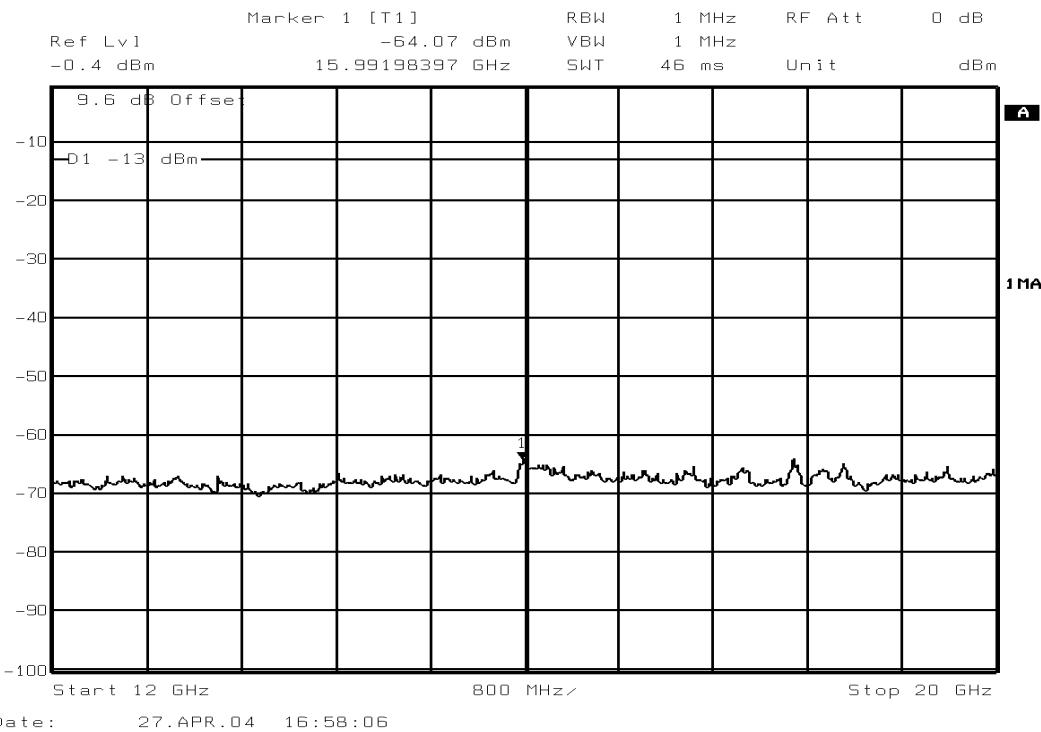


GPRS – Packet Data



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (9kHz – 4GHz)
Channel 661 (1880.0MHz) – Minimum Power

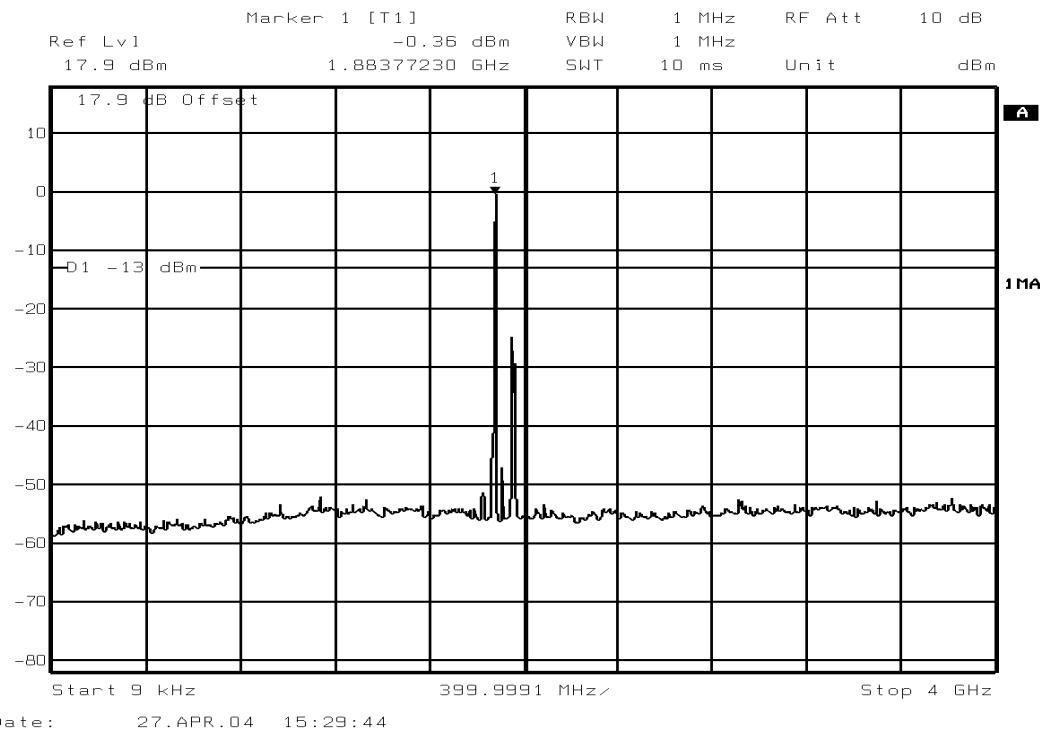


GPRS – Packet Data



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (4GHz – 12GHz)
Channel 661 (1880.0MHz) – Minimum Power

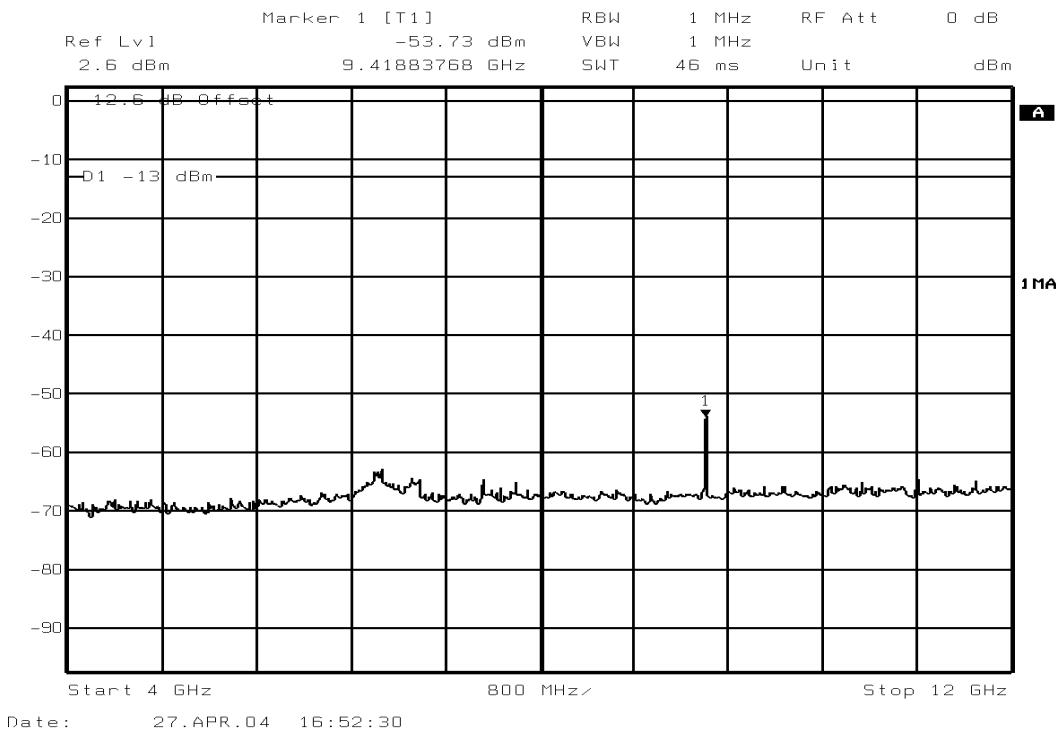


GPRS – Packet Data



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (12GHz – 20GHz)
Channel 661 (1880.0MHz) – Minimum Power

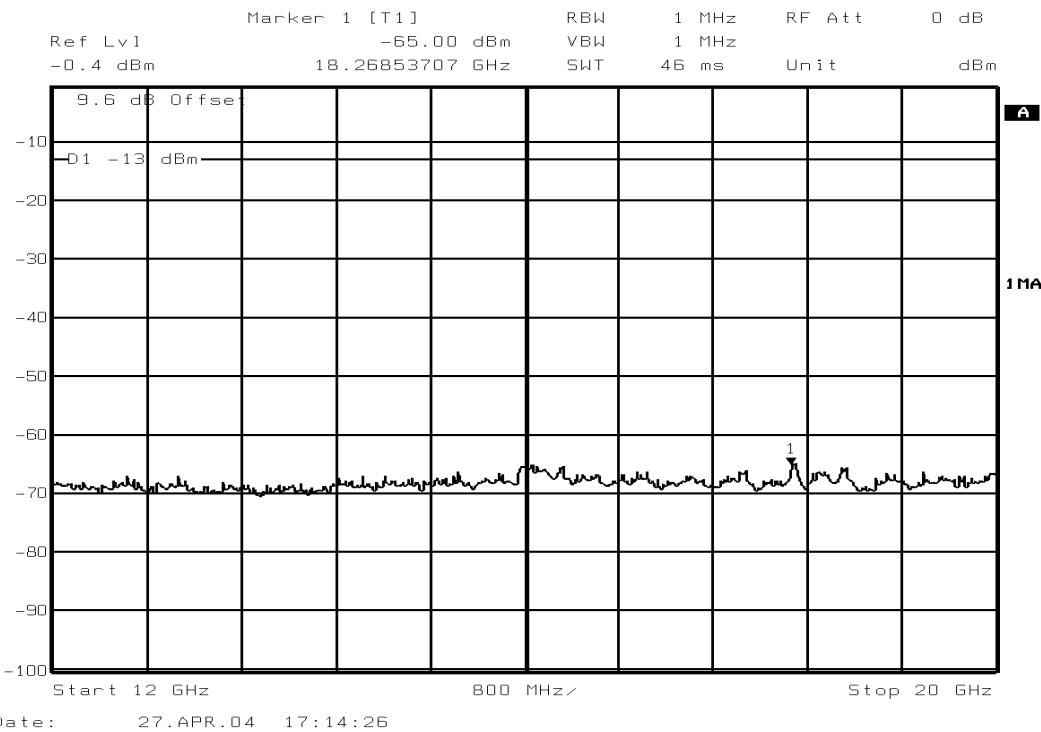


GPRS – Packet Data



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (9kHz – 4GHz)
Channel 810 (1909.8MHz) – Minimum Power

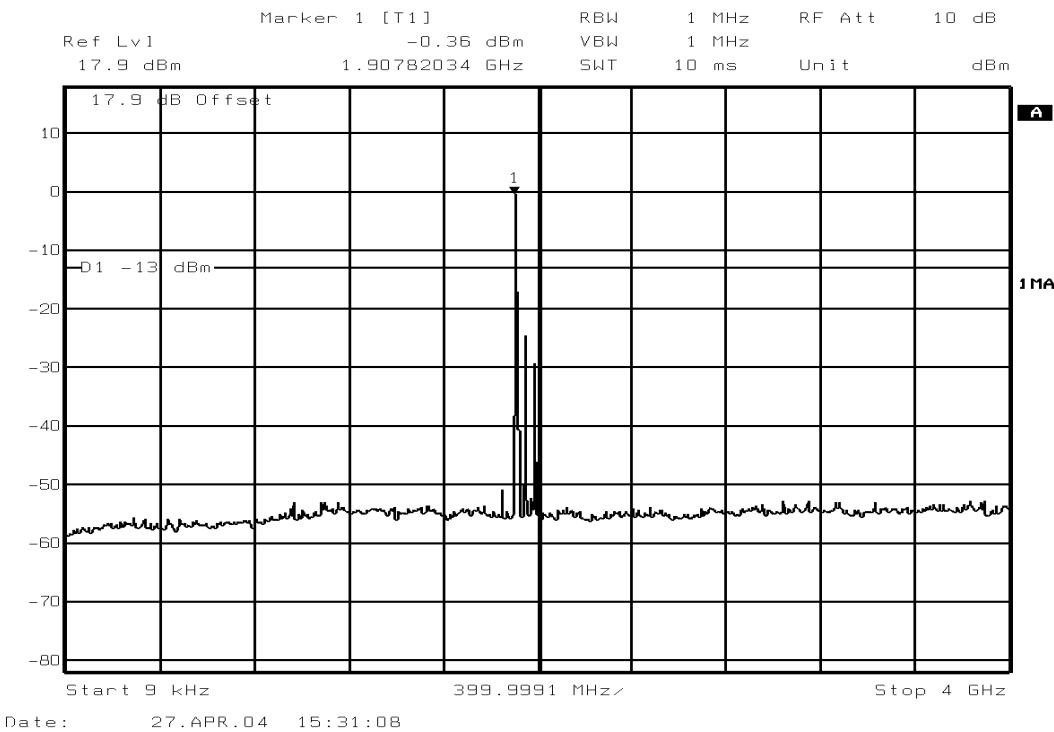


GPRS – Packet Data



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (4GHz – 12GHz)
Channel 810 (1909.8MHz) – Minimum Power

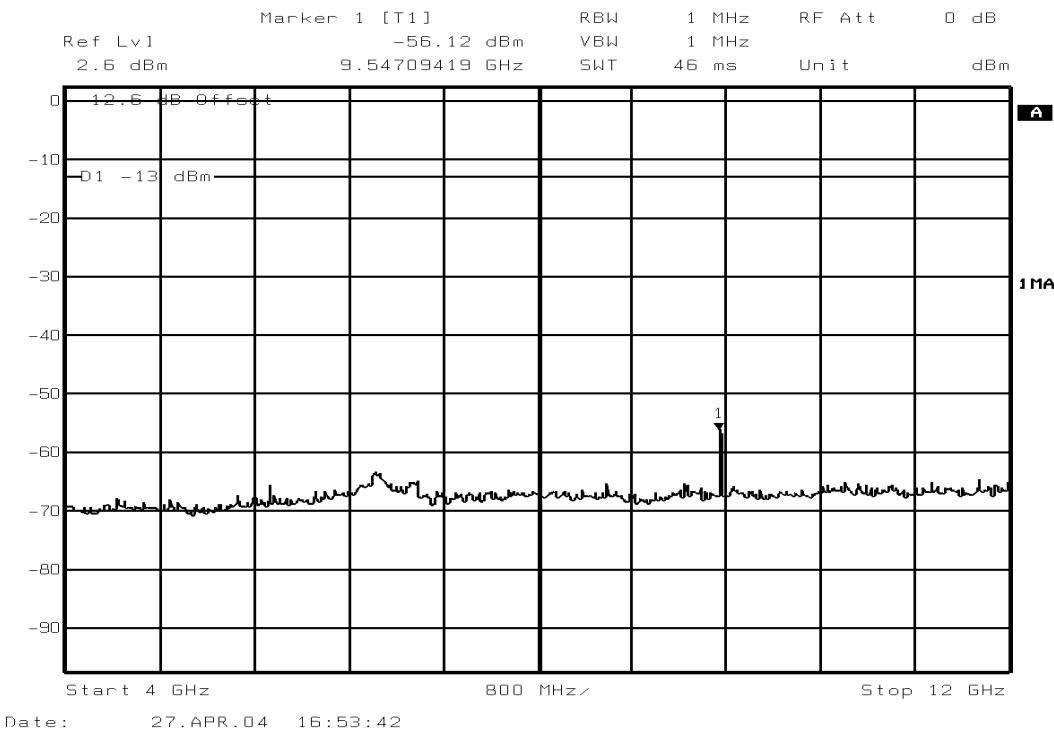


GPRS – Packet Data



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Spurious Emissions (12GHz – 20GHz)
Channel 810 (1909.8MHz) – Minimum Power

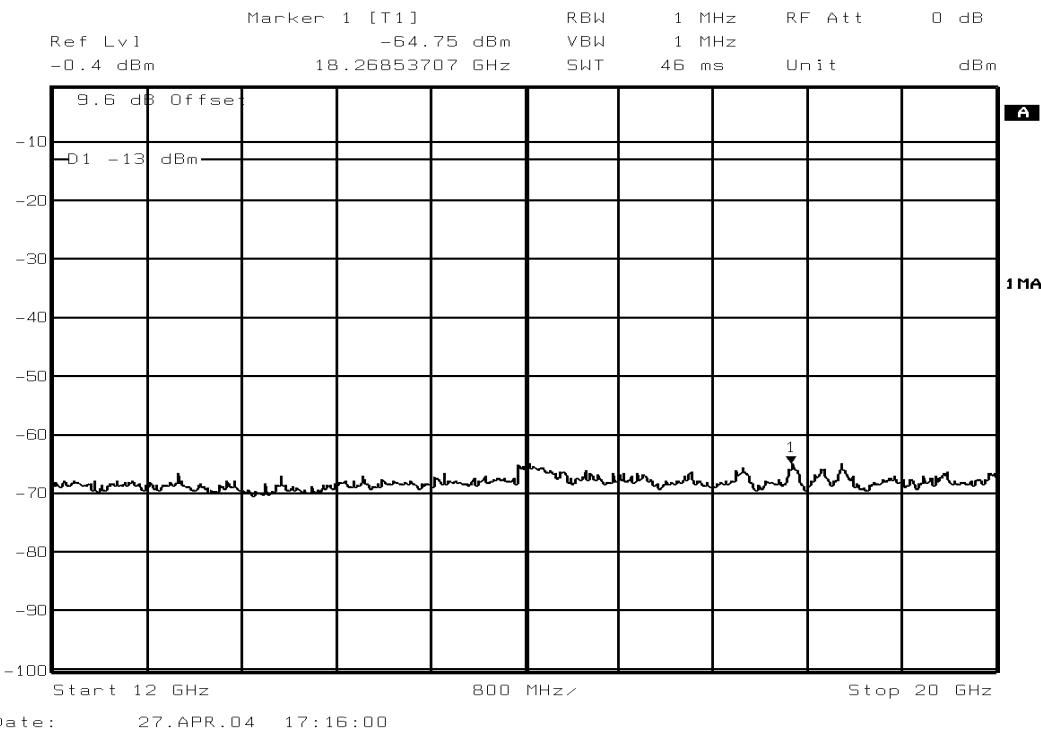

GPRS – Packet Data



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Harmonic Emissions - GSM

Channel 512 (1850.2MHz) – Maximum Power

Frequency (GHz)	Raw Result (dBm)	Path Loss (dB)	Corrected Result (dBm)	Limit (dBm)
3.7004	-48.3	17.8	-30.5	-13
5.5506	-62.7	10.4	-52.3	-13
7.4008	-50.5	7.2	-43.3	-13
9.2510	-52.5	7.3	-45.2	-13
11.1012	-56.6	6.5	-50.1	-13
12.9514	-62.3	5.1	-57.2	-13
14.8016	-69.2	4.6	-64.6	-13
16.6518	-69.5	4.7	-64.8	-13
18.5020	-66.4	3.8	-62.6	-13

Harmonic Emissions - GSM

Channel 661 (1880.0MHz) – Maximum Power

Frequency (GHz)	Raw Result (dBm)	Path Loss (dB)	Corrected Result (dBm)	Limit (dBm)
3.760	-52.6	17.1	-35.5	-13
5.640	-68.0	9.9	-58.1	-13
7.520	-51.1	8.3	-42.8	-13
9.400	-47.0	6.0	-41.0	-13
11.280	-56.1	6.2	-49.9	-13
13.160	-57.5	5.8	-51.7	-13
15.040	-73.0	5.7	-67.3	-13
16.920	-73.3	4.9	-68.4	-13
18.800	-61.1	4.8	-56.2	-13



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Harmonic Emissions - GSM

Channel 810 (1909.8MHz) – Maximum Power

Frequency (GHz)	Raw Result (dBm)	Path Loss (dB)	Corrected Result (dBm)	Limit (dBm)
3.8196	-47.3	17.9	-29.4	-13
5.7294	-65.5	9.9	-55.6	-13
7.6392	-50.3	8.0	-42.3	-13
9.5490	-49.9	6.1	-43.8	-13
11.4588	-48.0	6.1	-41.9	-13
13.3686	-54.1	4.5	-49.6	-13
15.2784	-65.3	4.7	-60.6	-13
17.1882	-63.9	5.4	-58.5	-13
19.0980	-65.6	4.0	-61.6	-13

Harmonic Emissions - GSM

Channel 512 (1850.2MHz) – Minimum Power

Frequency (GHz)	Raw Result (dBm)	Path Loss (dB)	Corrected Result (dBm)	Limit (dBm)
3.7004	-78.6	17.8	-60.8	-13
5.5506	-75.1	10.4	-64.7	-13
7.4008	-74.3	7.2	-67.1	-13
9.2510	-69.4	7.3	-62.1	-13
11.1012	-77.9 *	6.5	-71.4	-13
12.9514	-77.0	5.1	-71.9	-13
14.8016	-76.8 *	4.6	-72.2	-13
16.6518	-75.7 *	4.7	-71.0	-13
18.5020	-74.9 *	3.8	-71.1	-13



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Harmonic Emissions - GSM

Channel 661 (1880.0MHz) – Minimum Power

Frequency (GHz)	Raw Result (dBm)	Path Loss (dB)	Corrected Result (dBm)	Limit (dBm)
3.760	-77.3	17.1	-60.2	-13
5.640	-78.8	9.9	-68.8	-13
7.520	-75.3	8.3	-67.0	-13
9.400	-65.0	6.0	-59.0	-13
11.280	-78.1 *	6.2	-71.9	-13
13.160	-77.6 *	5.8	-71.8	-13
15.040	-76.7 *	5.7	-71.0	-13
16.920	-75.8 *	4.9	-70.9	-13
18.800	-76.7 *	4.8	-71.9	-13

*Instrumentation Noise Floor

Harmonic Emissions - GSM

Channel 810 (1909.8MHz) – Minimum Power

Frequency (GHz)	Raw Result (dBm)	Path Loss (dB)	Corrected Result (dBm)	Limit (dBm)
3.8196	-74.2	17.9	-56.3	-13
5.7294	-74.5	9.9	-64.6	-13
7.6392	-76.0	8.0	-68.0	-13
9.5490	-66.8	6.1	-60.7	-13
11.4588	-77.2	6.1	-71.1	-13
13.3686	-77.0 *	4.5	-72.5	-13
15.2784	-75.6 *	4.7	-70.9	-13
17.1882	-74.8	5.4	-69.4	-13
19.0980	-76.0 *	4.0	-72.0	-13

* Instrumentation Noise Floor



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Harmonic Emissions - GPRS

Channel 512 (1850.2MHz) – Maximum Power

Frequency (GHz)	Raw Result (dBm)	Path Loss (dB)	Corrected Result (dBm)	Limit (dBm)
3.7004	-48.0	17.8	-30.2	-13
5.5506	-64.1	10.4	-53.7	-13
7.4008	-50.6	7.2	-43.4	-13
9.2510	-52.5	7.3	-45.2	-13
11.1012	-57.3	6.5	-50.8	-13
12.9514	-63.3	5.1	-58.2	-13
14.8016	-68.8	4.6	-64.2	-13
16.6518	-69.9	4.7	-65.2	-13
18.5020	-67.4	3.8	-63.6	-13

Harmonic Emissions - GPRS

Channel 661 (1880.0MHz) – Maximum Power

Frequency (GHz)	Raw Result (dBm)	Path Loss (dB)	Corrected Result (dBm)	Limit (dBm)
3.760	-53.7	17.1	-36.6	-13
5.640	-66.6	9.9	-56.7	-13
7.520	-50.5	8.3	-42.2	-13
9.400	-47.4	6.0	-41.4	-13
11.280	-57.1	6.2	-50.9	-13
13.160	-58.8	5.8	-53.0	-13
15.040	-70.6	5.7	-64.9	-13
16.920	-73.3	4.9	-68.4	-13
18.800	-61.9	4.8	-57.1	-13



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Harmonic Emissions – GPRS

Channel 810 (1909.8MHz) – Maximum Power

Frequency (GHz)	Raw Result (dBm)	Path Loss (dB)	Corrected Result (dBm)	Limit (dBm)
3.8196	-46.5	17.9	-28.8	-13
5.7294	-68.8	9.9	-58.9	-13
7.6392	-49.5	8.0	-41.5	-13
9.5490	-49.1	6.1	-43.0	-13
11.4588	-50.2	6.1	-44.1	-13
13.3686	-55.8	4.5	-51.3	-13
15.2784	-66.3	4.7	-61.6	-13
17.1882	-65.6	5.4	-60.2	-13
19.0980	-66.6	4.0	-62.6	-13

Harmonic Emissions - GPRS

Channel 512 (1850.2MHz) – Minimum Power

Frequency (GHz)	Raw Result (dBm)	Path Loss (dB)	Corrected Result (dBm)	Limit (dBm)
3.7004	-69.4	17.8	-51.6	-13
5.5506	-74.5	10.4	-64.1	-13
7.4008	-72.1	7.2	-64.9	-13
9.2510	-69.4	7.3	-62.1	-13
11.1012	-78.0 *	6.5	-71.5	-13
12.9514	-77.2 *	5.1	-72.1	-13
14.8016	-76.8 *	4.6	-72.2	-13
16.6518	-76.2 *	4.7	-71.5	-13
18.5020	-74.9 *	3.8	-71.1	-13

*Instrumentation Noise Floor



2.8 CONDUCTED SPURIOUS EMISSIONS - Continued

Harmonic Emissions - GPRS

Channel 661 (1880.0MHz) – Minimum Power

Frequency (GHz)	Raw Result (dBm)	Path Loss (dB)	Corrected Result (dBm)	Limit (dBm)
3.760	-69.8	17.1	-52.7	-13
5.640	-77.4	9.9	-67.5	-13
7.520	-74.3	8.3	-66.0	-13
9.400	-65.2	6.0	-59.2	-13
11.280	-77.2 *	6.2	-71.0	-13
13.160	-77.0 *	5.8	-71.2	-13
15.040	-76.2 *	5.7	-70.5	-13
16.920	-76.5 *	4.9	-71.6	-13
18.800	-77.3 *	4.8	-72.5	-13

*Instrumentation Noise Floor

Harmonic Emissions - GPRS

Channel 810 (1909.8MHz) – Minimum Power

Frequency (GHz)	Raw Result (dBm)	Path Loss (dB)	Corrected Result (dBm)	Limit (dBm)
3.8196	-68.5	17.9	-50.6	-13
5.7294	-73.5	9.9	-63.6	-13
7.6392	-74.7	8.0	-66.7	-13
9.5490	-67.3	6.1	-61.2	-13
11.4588	-76.9 *	6.1	-70.8	-13
13.3686	-77.9 *	4.5	-73.4	-13
15.2784	-76.4 *	4.7	-71.7	-13
17.1882	-76.7	5.4	-71.3	-13
19.0980	-75.7 *	4.0	-71.7	-13

* Instrumentation Noise Floor



2.9 FREQUENCY STABILITY UNDER TEMPERATURE VARIATIONS

2.9.1 FCC CFR 47: Part 24 Subpart E, Section 24.23

2.9.2 Equipment Under Test

MX-V30

2.9.3 Date of Test

30th April 2004

2.9.4 Test Equipment Used (See Section 3.1 for details)

2, 3, 4, 5, 11, 12

2.9.5 Test Procedure

GSM

The EUT was set to transmit on maximum power and measurements were made on Timeslot 3. A Digital Communications Analyser, (CMU200), was used to measure the Frequency Error. The maximum result of measurements made over 200 bursts was recorded.

GPRS

The EUT was set to transmit on maximum power, (timeslots 3 and 4 active), and measurements performed on Timeslot 3. A Digital Communications Analyser, (CMU200), was used to measure the Frequency Error. The maximum result of measurements made over 200 bursts was recorded.

2.9.6 Test Results

GSM – Circuit Switched

Temperature Interval(°C)	Test Frequency (GHz)	Deviation (Hz)
- 30	1.88	+34
- 20	1.88	+32
- 10	1.88	+21
0	1.88	+39
+ 10	1.88	+21
+ 20	1.88	+22
+ 30	1.88	+42
+ 40	1.88	+45
+ 50	1.88	+63



2.9 FREQUENCY STABILITY UNDER TEMPERATURE VARIATIONS – Continued

GPRS – Packet Data

Temperature Interval(°C)	Test Frequency (GHz)	Deviation (Hz)
- 30	1.88	-22
- 20	1.88	-24
- 10	1.88	+23
0	1.88	+32
+ 10	1.88	-26
+ 20	1.88	+21
+ 30	1.88	+22
+ 40	1.88	+25
+ 50	1.88	-65

2.9.7 Limit

Limit	The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorised frequency block.
-------	--

Remarks

EUT complies with CFR 47 Part 24.235. The frequency stability of the EUT is sufficient to ensure the carrier remains within the assigned frequency block.



2.10 FREQUENCY STABILITY UNDER VOLTAGE VARIATIONS

2.10.1 FCC CFR 47: Part 24 Subpart E, Section 24.235

2.10.2 Equipment Under Test

MX-V30

2.10.3 Date of Test

29th April 2004

2.10.4 Test Equipment Used (See Section 3.1 for details)

2, 3, 4, 5, 9, 10

2.10.5 Test Procedure

GSM

The EUT was set to transmit on maximum power and measurements were made on Timeslot 3. A Digital Communications Analyser, (CMU200), was used to measure the Frequency Error. The maximum result of measurements made over 200 bursts was recorded.

GPRS

The EUT was set to transmit on maximum power, (timeslots 3 and 4 active), and measurements performed on Timeslot 3. A Digital Communications Analyser, (CMU200), was used to measure the Frequency Error. The maximum result of measurements made over 200 bursts was recorded.

2.10.6 Test Results

GSM

DC Voltage (V)	Test Frequency (GHz)	Deviation (Hz)
4.2	1.88	+42
3.8	1.88	+41
3.2	1.88	+26

**2.10 FREQUENCY STABILITY UNDER VOLTAGE VARIATIONS - Continued**

GPRS

DC Voltage (V)	Test Frequency (GHz)	Deviation (Hz)
4.2	1.88	+21
3.8	1.88	+22
3.2	1.88	+23

2.10.7 Limit

Limit	The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorised frequency block.
-------	--

Remarks

EUT complies with CFR 47 Part 24.235. The frequency stability of the EUT is sufficient to ensure the carrier remains within the assigned frequency block.



SECTION 3

TEST EQUIPMENT USED



3.1 TEST EQUIPMENT USED

Item	Instrument	Manufacturer	Type No	Serial No	EMC / INV No	Cal. Due
1	Spectrum Analyser	Rohde & Schwarz	FSEM	827156/006	INV4034	05/01/2005
2	GSM Test Set	Rohde & Schwarz	CMU 200	103944	INV4937	13/11/2004
3	Attenuator	Huber & Suhner	6810.17.B	5929	INV4622	T/U
4	Combiner	Weinschel	1506A	KA845	INV4494	10/08/2004
5	Signal Generator	Hewlett Packard	8657B	3208U02456	EMC1722	09/10/2004
6	High Pass Filter	RLC	F-100-4000-5-R	(0012)	INV4468	T/U
7	Signal Generator	Hewlett Packard	8673B	2823A01302	EMC2551	14/06/2004
8	Spectrum Analyser	Agilent	E4407B	US41442853	EMC2783	22/03/2005
9	DC Power Supply	Kingshill	36V5C	814	INV248	T/U
10	Digital Voltmeter	Fluke	70 III	72320985	INV4159	16/09/2004
11	Environmental Chamber	Montford	-	-	INV3037	20/11/2004
12	Thermometer	Fluke	51 K/J	73860011	INV4222	17/03/2005
13	Turntable Controller	H-D GmbH	HD 050	050/396	2528	-
14	Antenna Mast	EMCO	1051-2	9101-1570	2182	-
15	Antenna Mast Controller	EMCO	2090	-	-	-
16	Screened Room 5	Siemens	EAC54300	-	2533	-
17	EMI Test Receiver	Rohde & Schwarz	ESIB26	100212	2988	08/04/2005
18	Double Ridge Guide Antenna	EMCO	3115	2204	502	04/07/2004
19	DRG Antenna	EMCO	3115	97015079	2397	04/07/2004
20	Attenuator 10dB	Marconi	6534/3	2954	1494	
21	Signal Generator	Marconi	2031	119530069	1979	30/10/2004
22	Digital Barometer	ORE	BAA913HG	-	Room 5	T/U
23	Low Noise Amplifier	Miteq Corp	AMF-3d-001080-18-13P	-	2457	-
24	Solid State Amplifier	Avantek	AWT-18036	F133658452	1081	26/06/2004
25	Spectrum Analyser	Hewlett Packard	8542E	3617A00165-00154	2286	09/12/2004
26	3GHz High Pass Filter	RLC Electronics	F-100-3000-5-R	-	4969	10/03/2005
27	Test Receiver	Rohde & Schwarz	ESH3	872742/002	1020	16/08/2004
28	Spectrum Analyser	Rohde & Schwarz	EZM	892242-023	1416	-
29	LISN	Rohde & Schwarz	ESH2-Z5	892107-109	1584	02/10/2004
30	Bilog Antenna	Schaffner	CBL6143	5101	2965	12/09/2004
31	Transient Limiter	Hewlett Packard	11947A	3107A01649	2244	07/05/2004



3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

IN THE FREQUENCY RANGE 30MHz TO 1000MHz		
TEST	FREQUENCY	AMPLITUDE
For 6dB Bandwidth	$\pm 210.894\text{kHz}$	$\pm 0.5\text{dB}$
For Maximum Output Power	Not Applicable	$\pm 0.5\text{dB}$
For Radiated Emissions, Quasi-Peak Measurements taken in Zero Span using the Hewlett Packard EMI Receiver and Bilog Antenna	$\pm 2 \times 10^{-7} \times \text{Centre Frequency}$	5.15dB calculated in accordance with CISPR 16-4
For Spurious Conducted Emissions	Not Applicable	$\pm 3.0\text{dB}$
IN THE FREQUENCY RANGE 1GHz TO 20GHz		
TEST	FREQUENCY	AMPLITUDE
For Spurious Radiated Emissions measurements	$\pm 2 \times 10^{-7} \times \text{Centre Frequency}$	$\pm 3.4\text{dB}$
For Peak Power Spectral Density	Not Applicable	$\pm 1.8\text{dB}$
For Effective Radiated Power (ERP) measurements	Not Applicable	$\pm 1.45\text{dBm}$



SECTION 4
PHOTOGRAPHS



4.1 TEST SAMPLE PHOTOGRAPHS



Front View of an MX-V30 – Closed



4.1 TEST SAMPLE PHOTOGRAPHS - Continued



Front View of an MX-V30 – Open



4.1 TEST SAMPLE PHOTOGRAPHS – Continued



Rear View of an MX-V30



4.1 TEST SAMPLE PHOTOGRAPHS - Continued



Rear View of an MX-V30 – Battery Removed.



SECTION 5

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



5.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA
(Not UKAS Accredited).

This report must not be reproduced without the written permission of TÜV Product Service Limited

© 2004 TÜV Product Service Limited

APPENDIX A

TITCHFIELD FCC SITE COMPLIANCE LETTER

FEDERAL COMMUNICATIONS COMMISSION

**Laboratory Division
7435 Oakland Mills Road
Columbia, MD 21046**

October 18, 2002

Registration Number: 90987

**TUV Product Service Ltd
Segensworth Road
Titchfield
Fareham, Hampshire, PO15 5RH
United Kingdom
Attention: Kevan Adsetts**


**Re: Measurement facility located at Titchfield
Anechoic chamber (3 meters) and 3 & 10 meter OATS
Date of Listing: October 18, 2002**

Gentlemen:

Your request for registration of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC rules. The information has, therefore, been placed on file and the name of your organization added to the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website www.fcc.gov under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,



**Thomas W. Phillips
Electronics Engineer**