

FCC / INDUSTRY CANADA MEASUREMENT REPORT

CERTIFICATION OF COMPLIANCE FCC PART90 & INDUSTRY CANADA RSS-119 CERTIFICATION

PRODUCT : Data Radio
Land Mobile Service (LMR)
MODEL/TYPE NO : SD-125E U2
FCC ID : RXUSD-125EU2
TRADE NAME : 
Maxon CIC Corp.
APPLICANT : Chongho Building, #7-61 Yangjae-Dong, Seocho-Gu, Seoul, 137-130, Korea
Attn. : Hyun Koo Kang / Senior Manager
CLASSIFICATION : TNB Licensed Non-Broadcast Station Transmitter
FCC Part 90 Private land mobile radio services
RULE PART(S) : RSS-119 Land Mobile and Fixed Radio Transmitters and Receivers,
27.4 MHz to 960 MHz
FCC PROCEDURE : Certification
DATES OF TEST : August 1, 2008 to August 12, 2008
DATES OF ISSUE : August 12, 2008
TEST REPORT No. : BWS-08-RF-0009
TEST LAB. : BWS TECH Inc.(FCC Registration Number : 553281)

This Data Radio SD-125E U2 has been tested in accordance with the measurement procedures specified in ANSI C63.4-2003 and ANSI/TIA-603-C-2004 at the BWS TECH/EMC Test Laboratory and has been shown to be complied with the electromagnetic radiated emission limits specified in FCC Rule Part 90 and Industry Canada RSS-119.

I attest to the accuracy of data. All measurement herein was performed by me or were made under my supervision. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. The results of testing in this report apply to the product/system, which was tested only. Other similar equipment may not necessarily produce the same results due to production tolerance and measurement uncertainties.

August 12, 2008


(Date)



Tested by CY-choi

August 12, 2008

(Date)



Reviewed by TaeHyun, Nam

BWS TECH Inc.

www.bws.co.kr

#611-1 Maesan-Ri, Mohyeon-Myeon, Yongin-Si, Gyeonggi-Do, 449-853 Korea

TEL: +82 31 333 5997 FAX: +82 31 333 0017

TABLE OF CONTENTS

	Pages
1. General Information	3
2. Description of Test Facility	4
3. Product Information	5
4. Summary of Test Results	9
5. Test Data	10
5.1. RF Power Output (Conducted)	10
5.2. Modulation Characteristics – Audio Frequency Response	12
5.3. Modulation Characteristics – Modulation Limiting	14
5.4. Occupied Bandwidth	18
5.5. Spurious Emissions at Antenna Terminals	20
5.6. Field Strength of Spurious Radiation	22
5.7. Radiated Emission Test	24
5.8. Frequency Stability / Temperature Variation	26
5.9. Transient Frequency Behavior	28
5.10 Exposure Requirement	30
6. Test Plot	32
6.1. 99% Occupied Bandwidth	32
6.2. Emission Mask	50
6.3. Spurious Emissions at Antenna Terminals	68
6.4. Frequency Stability / Temperature Variation	74
6.5. Transient Frequency Behavior	86
7. Test Equipment List	90
 Appendix 1. Test Setup Photos	
Appendix 2. FCC ID Label and location	
Appendix 3. External Photos of EUT	
Appendix 4. Internal Photos of EUT	
Appendix 5. Block Diagram	
Appendix 6. Schematics	
Appendix 7. Theory of Operation	
Appendix 8. Part List / Tune up Procedure	
Appendix 9. User Manual	

FCC / INDUSTRY CANADA TEST REPORT

Scope - Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)

1. General Information

Applicant

Company Name Maxon CIC Corp.
Company Address Chongho Building, #7-61 Yangjea-Dong, Seocho-Gu, Seoul, 137-130, Korea
Phone/Fax Phone : +82-2-3498-3060 Fax : 02-3498-3115

Manufacturer

Company Name Maxon CIC Thailand Co., Ltd(MCTL)
Company Address 40/23 Moo 5 Rojana Industrial Park Tambol U-Thai, Amphur U-Thai Ayutthaya 13210 Thailand
Phone/Fax Tel No. : +66-(0)35-719-498~501 Fax No. : +66-(0)35-719-492

- **EUT Type** Data Radio (LMR)
- **Model Number** SD-125E U2
- **FCC Identifier** RXUSD-125EU2
- **S/N** #1
- **FCC Rule Part(s)** FCC Part 90 Private land mobile radio services
RSS-119 Land Mobile and Fixed Radio Transmitters and Receivers,
27.4 MHz to 960 MHz
- **FCC Classification** TNB : Licensed Non-Broadcast Station Transmitter
- **Freq. Range** 440 MHz ~ 470 MHz
- **Channel** 16 Channels
- **Modulation Method** FM, FSK, GMSK
- **Emission Designator** 11K25F1D, 11K0F3E, 16K0F3E
- **RF Power Output** 1/5 Watt
- **Test Procedure** ANSI C63.4-2003 and ANSI/TIA-603-C-2004
- **Dates of Tests** August 1, 2008 to August 12, 2008
- **Place of Tests** BWS TECH Inc.(FCC Registration Number : 553281)
#611-1 Maesan-Ri, Mohyeon-Myeon, Yongin-Si, Gyeonggi-Do, 449-853 Korea
TEL: +82 31 333 5997 FAX: +82 31 333 0017
- **Test Report No.** BWS-08-RF-0009

2. Description of Test Facility

The measurement for radiated and conducted emission test were conducted at the open area test site of BWS TECH Inc. facility located at #611-1 Maesan-Ri, Mohyeon-Myeon, Yongin-Si, Gyeonggi-Do, 449-853 Korea. The site is constructed in conformance with the requirements of the ANSI C63.4-2000 and CISPR Publication 16. The BWS TECH measurement facility has been filed to the Commission with the FCC for 3 and 10-meter site configurations. Detailed description of test facility was found to be in compliance with the requirements of Section 2.948 FCC Rules according to the ANSI C63.4-2000 and registered to the Federal Communications Commission (Registration Number : 553281).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C.63.4-2000) was used in determining radiated and conducted emissions from the Maxon C IC Corp. Data Radio Model : SD-125E U2.

3. Product Information

The Equipment Under Test (EUT) is the MAXON CIC CO LTD Data Radio model: SD-125E U2 (FCC ID: RXUSD-125EU2).

The Maxon SD-125E Series of RF Link Modules from Maxon utilize the latest technology in their designs and manufacturing.

Both the UHF and VHF models are Phase Lock Loop Synthesizer(PLL) / microprocessor controlled and offer 1/5 Watt(Low/High) programmable output power per channel with 16 channel capability.

Multiple functions including 1200 to 9600 baud rates. AC and/or DC audio coupling, GMSK and FSK modulation are standard in these fully programmable wide bandwidth RF Link Module units.

3.1 DC Voltage and Currents

The DC voltages applied to and DC currents into the several elements of the final radio frequency amplifying stage for normal operation over power range were;

Standby: 12 Volts, 0.065 Ampere

Receive: 12 Volts, 0.450 Ampere

Low Power: 12 Volts, 1.00 Ampere

High Power: 12 volts, 2.00 Ampere

3.2 Emission Designator

Type of Emission : F3E

Necessary Bandwidth and Emission Bandwidth:

Data (Narrow Band) : $B_n = 11K0F1D$

12.5 kHz (Narrow Band) : $B_n = 11K0F3E$

25.0 kHz (Wide Band) : $B_n = 16K0F3E$

Calculation:

Maximum Modulation(M) in kHz : 3000(Audio), 9600(Data)

Maximum Deviation(D) in kHz : 0.85(Data), 2.5(NB), 5(WB)

Constant Factor(k) : 1

$B_n = 2M + 2DK$

Data (Narrow Band) :

$B_n = [2 \times (9600 / 2)] + (2 \times 825 \times 1) = 11.25 \text{ kHz}$

12.5 (Narrow Band) :

$B_n = (2 \times 3000) + (2 \times 2500 \times 1) = 11.00 \text{ kHz}$

25.0 (Wide Band) :

$B_n = (2 \times 3000) + (2 \times 5000 \times 1) = 16.00 \text{ kHz}$

3.3 General Specification

GENERAL

Equipment Type	:	Data Radio
Performance Specifications	:	TIA/EIA -603 / IC, RSS212
Band	:	UHF(SD-125VE U2)
Channel Spacings	:	12.5 kHz, 25 kHz programmable
RF Output Power	:	5 / 1 watt programmable
Modulation Type	:	F1D, F3E
Intermediate Frequency	:	45.1 MHz & 455 kHz
Number of Channels	:	16
Frequency Source	:	Synthesizer
Operation Rating	:	Intermittent
	:	90 : 5 : 5 (Standby: RX: TX)
Power Supply	:	Ext. Power Supply(12 VDC Nominal)
	:	9.0V - 15.0V DC EXTREME
Temperature Range	:	Storage (- 40° C to + 80° C)
	:	Operating (- 30° C to + 60° C)
	:	Standby (Muted) < 65 mA
Current Consumption	:	Transmit 5 Watt RF power < 2.0 A
	:	Transmit 1 Watt RF power < 1.0 A
Frequency Bands	:	440 - 470 MHz 440 - 470 MHz
Lock Time	:	< 10 mS
TX to RX attack time	:	< 20 mS (No Power Saving)
RX to TX attack time	:	< 20 mS
Dimensions	:	30 mm (H) x 60 mm (W) x 100 mm (D)
Weight	:	240g

TRANSMITTER

Carrier Power		Minimum	Normal	Maximum
Hi	:	4.5W	5.0W	6.0W
Low	:	0.8W	1.0W	1.5W
Sustained Transmission		Nominal conditions		
Time	:	5	10	30 Sec.
Power	:	>90%	>85%	>80%
Frequency Error	:	< 0.75 kHz Nominal condition for UHF		
	:	< ±5.0 ppm Extreme condition for UHF		
Frequency Deviation	:	25.0 kHz Channel Spacing		Peak ±5.0, Min. ±3.8
	:	12.5 kHz Channel Spacing		Peak ±2.5, Min. ±1.9
	:	Within +1/-3dB of 6dB octave		
Audio Frequency Response	:	@ 300 Hz to 2.55 kHz for 12.5 kHz C.S.		
	:	@ 300 Hz to 3.0 kHz for 25 kHz C.S.		
	:	25.0 kHz Channel Spacing	< 70 dBc @ Nominal Condition	
	:		< 65 dBc @ Extreme Condition	
Adjacent Channel Power	:	12.5 kHz Channel Spacing	< 60 dBc @ Nominal Condition	
	:		< 55 dBc @ Extreme Condition	
Conducted Spurious Emission	:	< -57dBc		
Modulation Sensitivity	:	100mV RMS @ 60 % Peak Dev.		
	:	25.0 kHz Channel Spacing	> 40 dB (with no PSOPH)	
Hum & Noise	:	12.5 kHz Channel Spacing	> 40 dB (with PSOPH)	
Modulation Symmetry	:	< 10 % Peak Dev @ 1 kHz input for nominal dev +20dB		
Load Stability	:	No osc at ≥ 10:1 VSWR all phase angles and suitable antenna		
	:	No destroy at ≥ 20:1 all phase angle		
Peak Deviation Range		25.0 kHz Channel Spacing	Min. 3.5, Max. 6.0	
Adjustment @ 1 kHz, Nom.	:	12.5 kHz Channel Spacing	Min. 1.5, Max. 4.0	
Dev +20dB				

RECEIVER

Sensitivity (12dB Sinad)	:	(25.0kHz) < -118dBm, (12.5kHz) <-117dBm @ Normal Condition (25.0kHz) < -115dBm, (12.5kHz) <-114dBm @ Extreme Condition
Amplitude Characteristic	:	< ±3 dB 25.0 kHz Channel Spacing >70 dB @ Normal Condition >60 dB @ Extreme Condition
Adjacent Channel Selectivity	:	12.5 kHz Channel Spacing >60 dB @ Normal Condition >50 dB @ Extreme Condition
Spurious Response Rejection	:	> 70 dB (100 kHz - 4 GHz)
Image Response	:	> 70 dB
IF Response	:	> 70 dB
Others.	:	> 70 dB
IMD Response Rejection	:	65 dB
Conducted Spurious Emission	:	@ Normal Conditions: 9 kHz - 1 GHz < -57 dBm 1 GHz - 4 GHz < -47 dBm
RX Spurious Emissions (Radiated)	:	@ Normal Conditions: 9 kHz - 1 GHz < -57 dBm 1 GHz - 4 GHz < -47 dBm
AF Distortion	:	< 5% @ Normal Condition < 10 % @ Extreme Condition
RX Hum & Noise	:	25.0 kHz Channel Spacing > 40 dB (with No PSOPH) 12.5 kHz Channel Spacing > 40 dB (with PSOPH)
Receiver Response Time	:	< 16 mS
Squelch Opening Range	:	RF level for 6 to 14 dB Sinad
Squelch Closing Range (Hysteresis)	:	0 - 6 dB Sinad @ Normal Condition
Squelch Attack Time	:	RF Level at Threshold < 40 mS RF Level at Threshold + 20 dB < 30 mS
Squelch Decay Time	:	5 mS Min., 20 mS Max.
Antenna Socket Input Match	:	> 10 dB Return Loss
L.O. Frequency Temperature Stability	:	1st < 5 ppm, 2nd < 15 ppm from -30° to + 60° C
L.O. Frequency Aging Rate	:	±2 ppm/ year

Environmental (performance without degradation unless stated)

	:	Operating -30°C to +60°C Degradation Specified @ Extreme
Temperature	:	Storage -40°C to +80°C Recharging -10°C to+55°C
ESD	:	20kV (C-MIC≥15KV)
Vibration	:	MIL STD 810 C Procedures I , II , V and IEC68 26

3.4 EUT operating conditions & test configuration

3.4.1 Client Condition

Temperature : -30°C ~ +60°C

Humidity : 95 %

3.4.2 EUT Operating Condition

Operating Mode : Transmitter was operated in a continues transmission mode with the carrier modulated as specified in the test data.

Special test Software : Not Used.

Special test Hardware : Not Used.

TX Frequency Band : 440 MHz ~ 470 MHz

Test Frequencies :	Low	440.025 MHz
	Middle	455.025 MHz
	High	469.975 MHz

Modulation : FM Modulation

Modulation Signal Source : External Source

4. Summary of Test Results

TEST REQUIREMENTS	FCC Paragraph	IC Paragraph	Result
RF Power Output (Conducted)	§2.1046	RSS-119 §5.4	Pass
Audio Frequency Response	§2.1047	RSS-119 §5.13	Pass
Modulation Limiting	§2.1047	RSS-119 §5.13	Pass
Occupied Bandwidth	§2.1049	RSS-119 §5.5	Pass
Spurious Emissions at Antenna Terminals	§2.1051	RSS-119 §5.8	Pass
Field Strength of Spurious Radiation	§2.1053	RSS-119 §5.8	Pass
Radiated Emission Test	§15.209	RSS-Gen §6	Pass
Frequency Stability / Temperature Variation	§2.1055	RSS-119 §5.3	Pass
Transient Frequency Behavior	§90.214	RSS-119 §5.9	Pass
Exposure Requirement	§1.1307 §1.1310 §2.1091 §2.1093	RSS-102	Pass

5. TEST DATA

5.1 RF Power Output (Conducted)

5.1.1 Specification

FCC Rules Part 2, Section 2.1046
FCC Rules Part 90, Section 90.205
Industry Canada, RSS-119 Section 5.4

5.1.2 Method of Measurement

ANSI/TIA-603-C-2004 Section 2.2.1

5.1.3 Measurement Set-Up

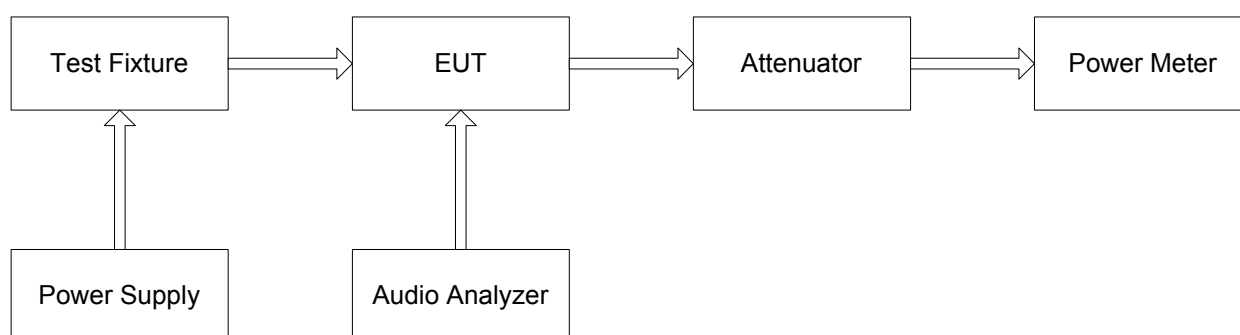


Fig.1

5.1.4 Test Equipment List

Equipment	Model Name	Manufacturer
EUT	SD-125E U2	Maxon CIC Corp.
Test Fixture	ACC-2001	Maxon CIC Corp.
Power Supply	IPS-30B03DD	Interact
Audio Analyzer	8903B	Agilent
Attenuator	33-30-33	Weinschel
Power Sensor	8481A	Agilent
Power Meter	E4418A	Agilent

5.1.5 Test Procedure

- The unit was turn-up in accordance with the alignment procedure stated in the Fig.1, and was loaded into a 50 ohm resistive termination.
- The unit was powered though test fixture that normally accompanied power cable by a DC power supply.
- Power supply voltage was set to nominal voltage at the power supply terminals with transmitter off.
- The unit was operated for three consecutive test cycles of 15 minutes standby and 5 minutes in transmitting.
- The EUT was aligned for transmitter operation on three frequencies(F_o) at full rated power per the tune-up procedure outlined in the Product Specification. This represents frequencies at the 1st, 2nd and 3rd end of the EUT operating frequency band.

5.1.6 Test Result

Frequency (MHz)	Measured Power (dBm)	Rated Power (Watts)
Low Power (Ref. 1 Watt)		
440.025	30.22	1.05
455.025	30.27	1.06
469.975	30.17	1.04
High Power (Ref. 5 Watts)		
440.025	37.17	5.21
455.025	36.87	4.86
469.975	36.85	4.84

5.2 Modulation Characteristics – Audio Frequency Response

5.2.1 Specification

FCC Rules Part 2, Section 2.1047(a)
FCC Rules Part 90, Section 90.207
Industry Canada, RSS-119 Section 5.13

5.2.2 Method of Measurement

ANSI/TIA-603-C-2004 Section 2.2.6

5.2.3 Measurement Set-Up

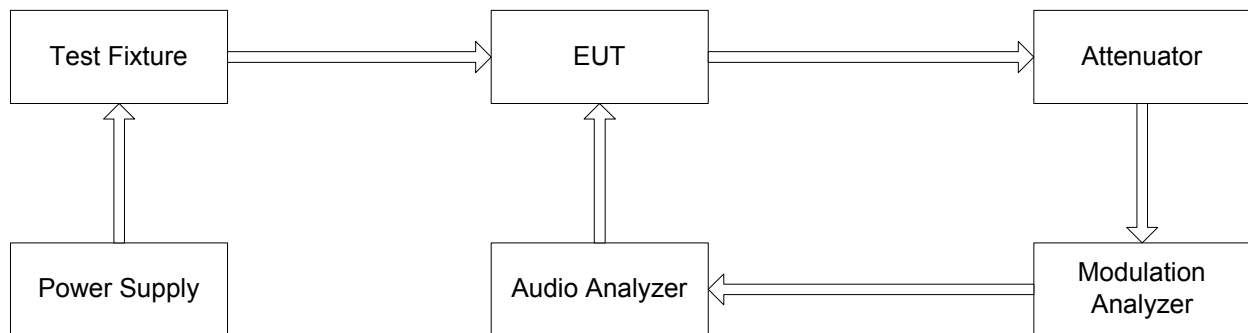


Fig.2

5.2.4 Test Equipment List

Equipment	Model Name	Manufacturer
EUT	SD-125E U2	Maxon CIC Corp.
Test Fixture	ACC-2001	Maxon CIC Corp.
Power Supply	IPS-30B03DD	Interact
Audio Analyzer	8903B	Agilent
Modulation Analyzer	8901B	Agilent
Attenuator	33-30-33	Weinschel

5.2.5 Test Procedure


- The unit was turn-up in accordance with the alignment procedure stated in the Fig.2, and was loaded into a 50 ohm resistive termination.
- The audio analyzer was connected to the audio input circuit/microphone of the EUT.
- The audio signal input was adjusted to obtain 20% modulation at 1 kHz, and this point was taken as the 0 dB reference level.
- With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 100 Hz to 10 kHz.
- The response in dB relative to 1 kHz was then measured, using the HP 8901A Modulation Analyzer.
- No limit is required by the FCC for audio frequency response. The measured audio response data shows the roll-off curve at 3 kHz.

5.2.6 Test Data

FCC Rules :	Part 2 §2.1047(a) & §90.207
IC Rules :	RSS-119 Section 5.13
Operating Frequency :	455.025 MHz
Channel :	Middle Channel
Reference Voltage :	12.0 VDC
Power Output :	5.0 Watts

Audio Input Frequency (Hz)	Attenuation (dB)	
	Channel Spacing : 12.5 kHz	Channel Spacing : 25 kHz
100	-22.0	-24.8
200	-15.8	-15.8
300	-12.0	-11.5
400	-9.3	-9.3
500	-7.0	-7.2
600	-5.1	-5.3
700	-3.5	-3.6
800	-2.1	-2.2
900	-0.9	-1.0
1000	0	0
1500	+3.1	+3.2
2000	+4.6	+4.8
2500	+5.1	+5.4
3000	+4.9	+5.2
4000	+2.4	+3.1
5000	-3.3	-2.1
6000	-17.1	-16.0
7000	-25.1	-35.3
8000	-27.8	-31.8
9000	-38.6	-39.5
10000	-45.2	-45.6

5.2.7 Graph

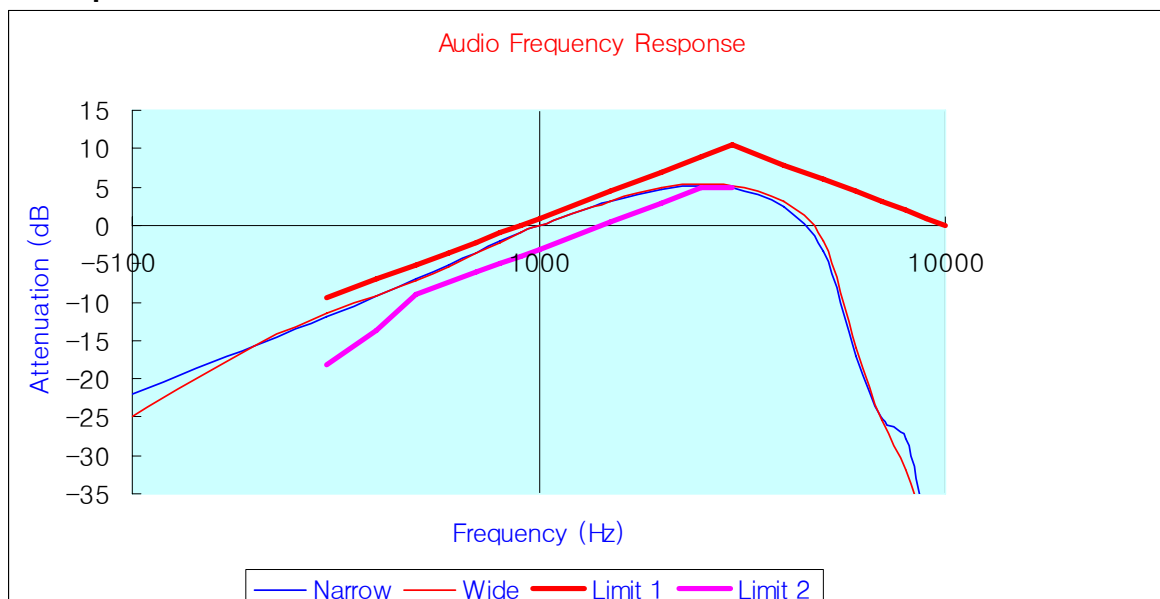

5.3 Modulation Characteristics – Modulation Limiting

5.3.1 Specification

FCC Rules Part 2, Section 2.1047(b)
FCC Rules Part 90, Section 90.207
Industry Canada, RSS-119 Section 5.13

5.3.2 Method of Measurement

ANSI/TIA-603-C-2004 Section 2.2.3

5.3.3 Measurement Set-Up

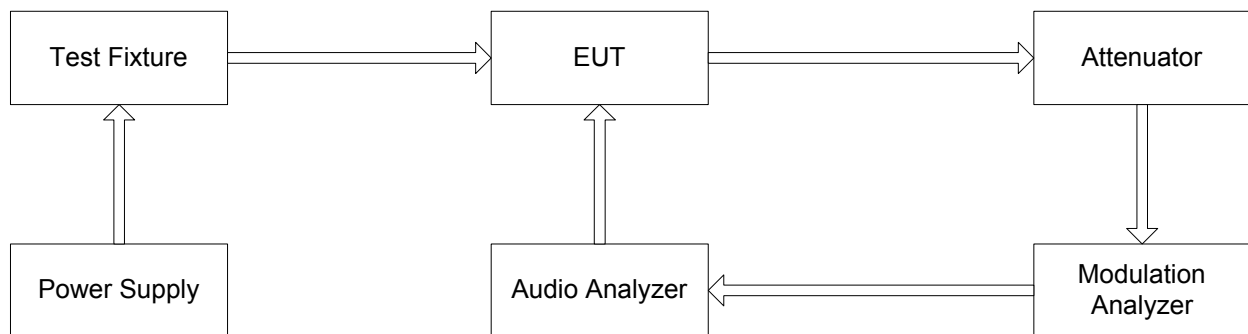


Fig.3

5.3.4 Test Equipment List

Equipment	Model Name	Manufacturer
EUT	SD-125E U2	Maxon CIC Corp.
Test Fixture	ACC-2001	Maxon CIC Corp.
Power Supply	IPS-30B03DD	Interact
Audio Analyzer	8903B	Agilent
Modulation Analyzer	8901B	Agilent
Attenuator	33-30-33	Weinschel

5.3.5 Test Procedure

- The unit was turn-up in accordance with the alignment procedure stated in the Fig.3, and was loaded into a 50 ohm resistive termination.
- Apply an 1kHz modulating signal to EUT from the audio frequency analyzer, and adjust the level to obtain 60% of full rated system deviation.
- Increase the level from the AF generator by ± 20 dB in one step.
- Measure the steady-state deviation.
- With the AF generator level hold constant, vary the audio frequency from 300 Hz to 3000 Hz. Record the maximum deviation.
- Set the modulation analyzer to measure the peak negative deviation and repeat the test above.

5.3.6 Test Data 1 Narrow Band

FCC Rules : Part 2 §2.1047(a) & §90.207
IC Rules : RSS-119 Section 5.13
Operating Frequency : 455.025 MHz
Channel : Middle Channel
Reference Voltage : 12.0 VDC
Power Output : 5.0 Watts


Audio Input Level (dB)	Positive Peak Deviation (kHz)			Negative Peak Deviation (kHz)		
	300 Hz	1 kHz	3 kHz	300 Hz	1 kHz	3 kHz
-20	0.10	0.21	0.32	0.11	0.20	0.32
-15	0.13	0.31	0.52	0.13	0.31	0.52
-10	0.19	0.50	0.87	0.19	0.51	0.87
-5	0.28	0.85	1.53	0.28	0.86	1.51
0	0.45	1.50	1.73	0.44	1.50	1.76
+5	0.76	1.99	1.75	0.76	2.01	1.79
+10	1.29	2.10	1.77	1.29	2.09	1.79
+15	2.14	2.12	1.78	2.18	2.09	1.80
+20	2.15	2.12	1.78	2.21	2.09	1.80

5.3.7 Test Data 2 Wide Band


FCC Rules : Part 2 §2.1047(a) & §90.207
IC Rules : RSS-119 Section 5.13
Operating Frequency : 455.025 MHz
Channel : Middle Channel
Reference Voltage : 12.0 VDC
Power Output : 5.0 Watts

Audio Input Level (dB)	Positive Peak Deviation (kHz)			Negative Peak Deviation (kHz)		
	300 Hz	1 kHz	3 kHz	300 Hz	1 kHz	3 kHz
-20	0.15	0.36	0.58	0.15	0.35	0.58
-15	0.20	0.56	0.99	0.20	0.56	1.00
-10	0.30	0.96	1.70	0.30	0.96	1.70
-5	0.49	1.65	2.88	0.48	1.66	2.96
0	0.80	3.00	3.22	0.80	3.00	3.30
+5	1.38	3.85	3.30	1.38	3.85	3.35
+10	2.35	4.00	3.31	2.38	3.95	3.37
+15	3.69	4.03	3.33	3.73	3.96	3.39
+20	3.94	4.04	3.35	3.96	3.97	3.39


5.3.8 Graph 1 **Narrow Band / Positive**

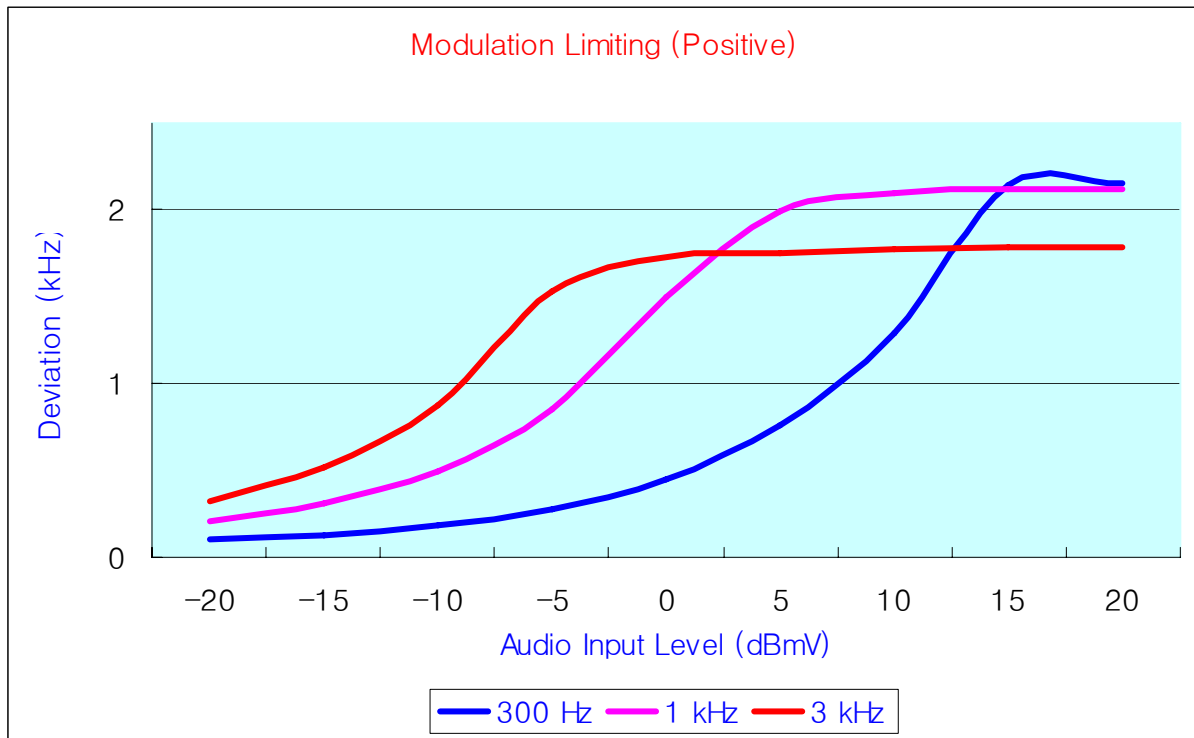


5.3.9 Graph 2 **Narrow Band / Negative**

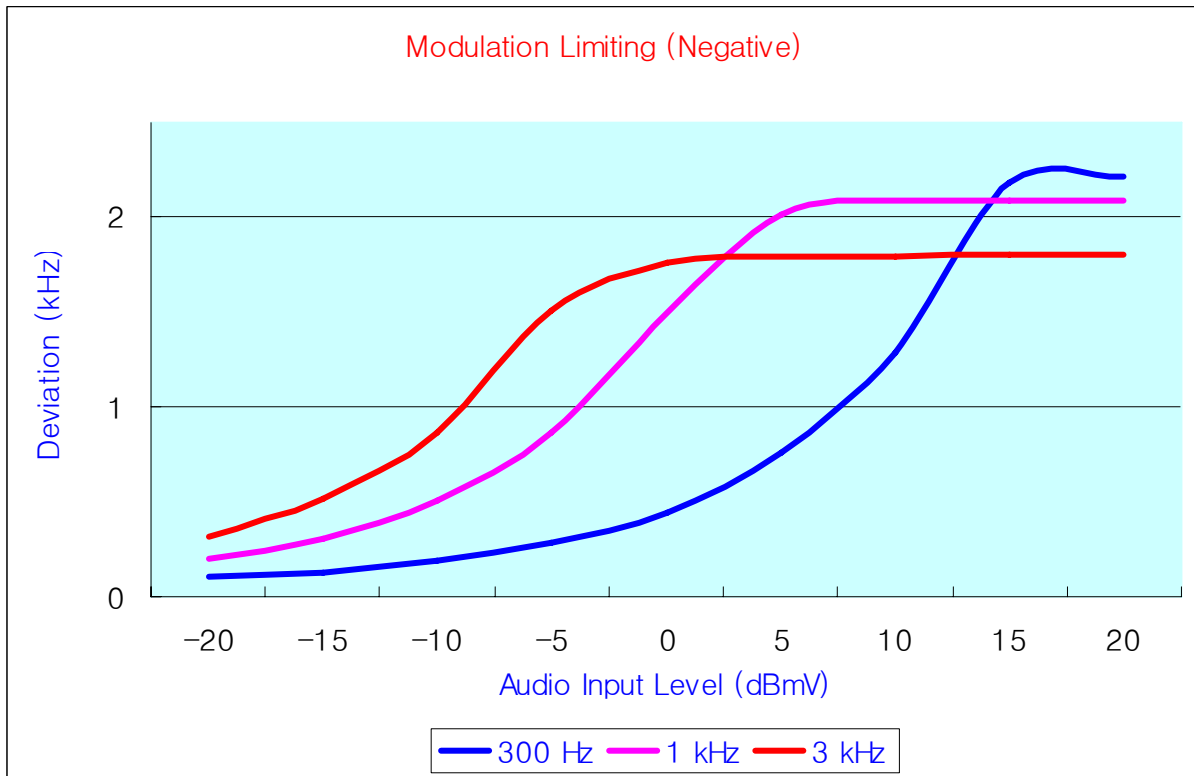

5.3.10 Graph 3 Wide Band / Positive

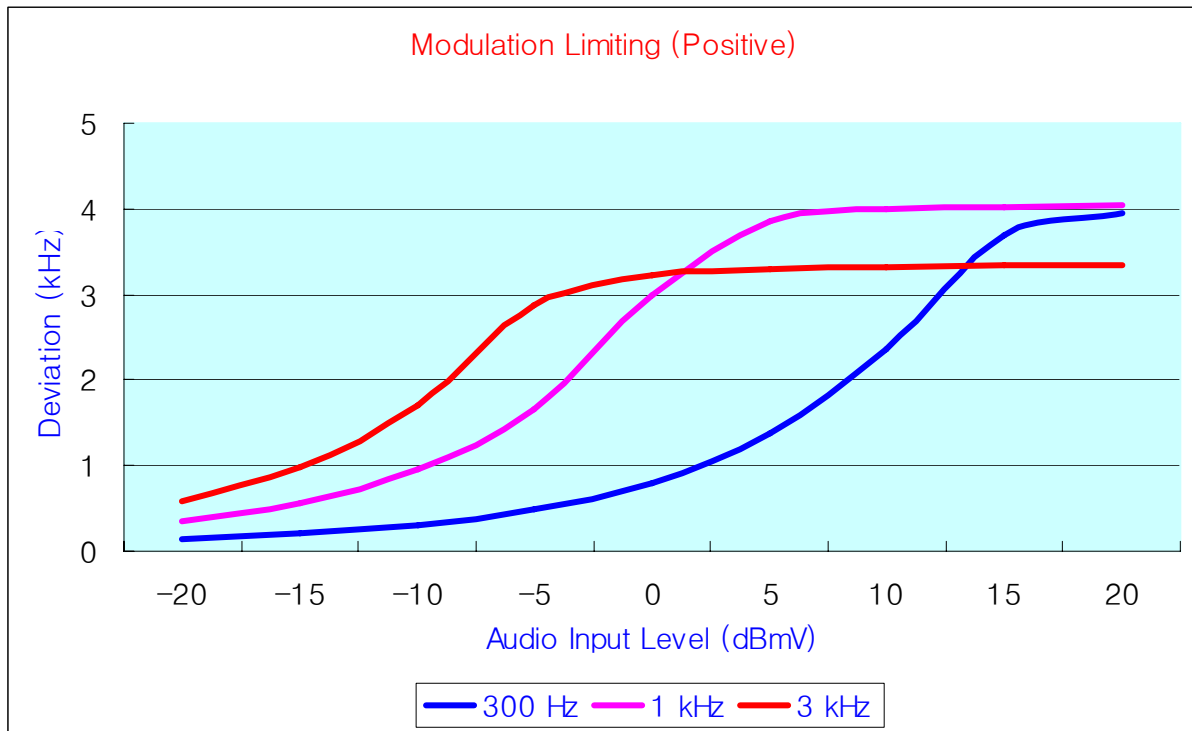

5.3.11 Graph 4 Wide Band / Negative

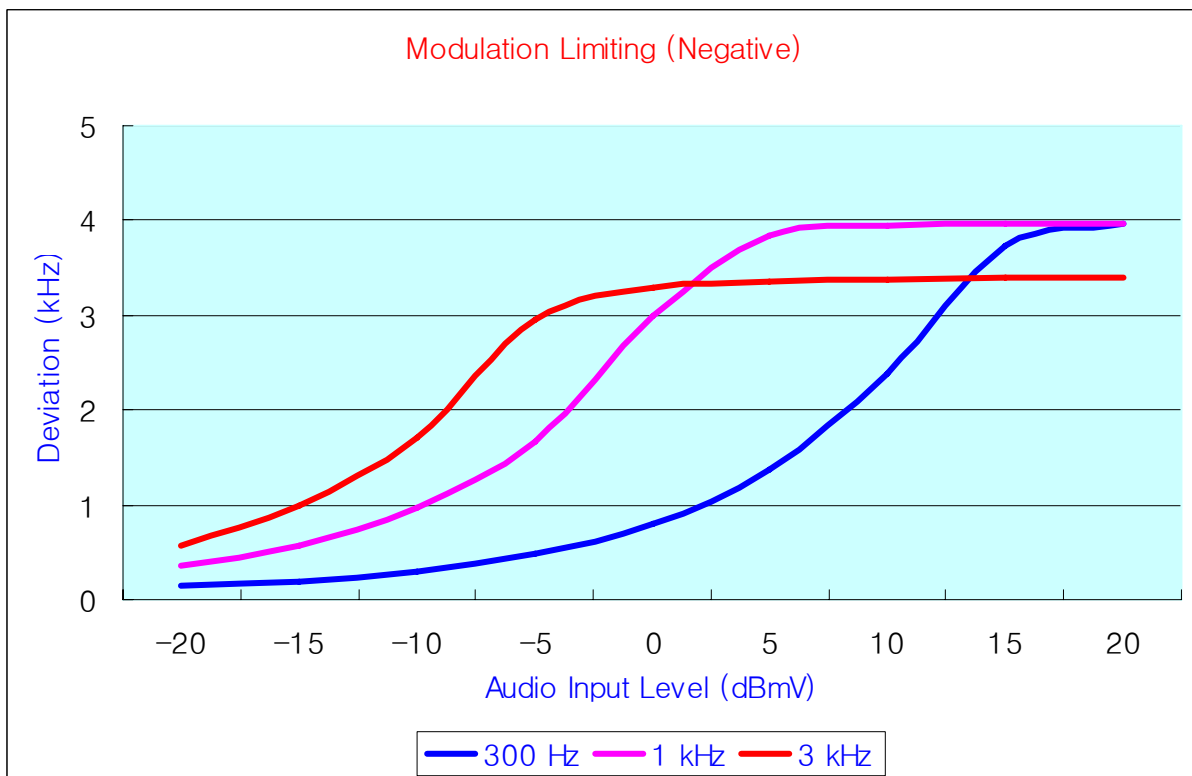

5.4 Occupied Bandwidth

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission. specified limits according to the emission mask per section 90.210 is as below.

Emission Mask B.

For transmitters that are equipped with an audio low-pass filter, the power of any emission must be below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
- (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 per-cent of the authorized bandwidth: At least 35 dB.
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized band-width: At least $43 + 10 \log (P)$ dB.

Emission Mask D.

For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(f_d - 5.625 \text{ kHz})$ dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.

5.4.1 Specification

FCC Rules Part 2, Section 2.1049
FCC Rules Part 90, Section 90.210
Industry Canada, RSS-119 Section 5.5
Industry Canada, RSS-119 Section 5.8

5.4.2 Method of Measurement

ANSI/TIA-603-C-2004 Section 2.2.11

5.4.3 Measurement Set-Up

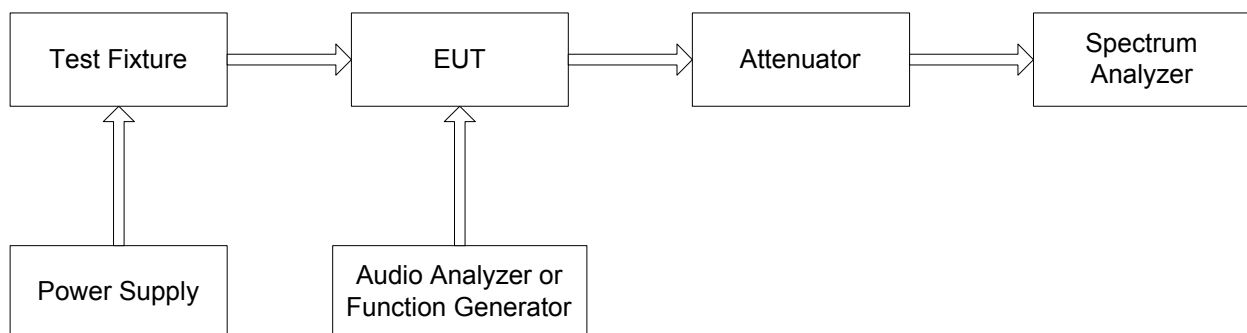


Fig.4

5.4.4 Test Equipment List

Equipment	Model Name	Manufacturer
EUT	SD-125E U2	Maxon CIC Corp.
Test Fixture	ACC-2001	Maxon CIC Corp.
Power Supply	IPS-30B03DD	Interact
Audio Analyzer	8903B	Agilent
Function Generator	33250A	Agilent
Attenuator	33-30-33	Weinschel
Spectrum Analyzer	FSP7	Rohde & Schwarz

5.4.5 Measurement Procedure

- The unit was turn-up in accordance with the alignment procedure stated in the Fig.4, and was loaded into a 50 ohm resistive termination.
- The radio transmitter was modulated by a 2500 Hz tone at an input level 16 dB greater than that necessary to produce 50 percent modulation. The input level shall be established at the frequency of maximum response of the audio modulating circuit.
- The occupied bandwidth data is obtained for 25 kHz and 12.5 kHz channel bandwidth.

5.4.6 Data

Frequency (MHz)	Channel Spacing	Mask Type	99% Bandwidth (kHz)		Maximum Authorized Bandwidth (KHz)
			Low Power	High Power	
440.025 MHz	F1D / 12.5 kHz	D	2.4	2.3	11.25
	F3E / 12.5 kHz	D	7.6	7.4	11.25
	F3E / 25.0 kHz	B	11.6	11.5	20.00
455.025 MHz	F1D / 12.5 kHz	D	2.4	2.4	11.25
	F3E / 12.5 kHz	D	7.8	7.7	11.25
	F3E / 25.0 kHz	B	11.6	11.6	20.00
469.975 MHz	F1D / 12.5 kHz	D	2.3	2.3	11.25
	F3E / 12.5 kHz	D	7.8	7.7	11.25
	F3E / 25.0 kHz	B	11.7	11.6	20.00

5.5 Spurious Emissions at Antenna Terminals

Conducted spurious emissions are emissions at the antenna terminals on a frequency or frequencies which are outside of band sufficient to ensure transmission or information of required quality for the class of communication desired.

5.5.1 Specification

FCC Rules Part 2, Section 2.1051
FCC Rules Part 90, Section 90.210
Industry Canada, RSS-119 Section 5.8

5.5.2 Method of Measurement

ANSI/TIA-603-C-2004 Section 2.2.13

5.5.3 Measurement Set-Up

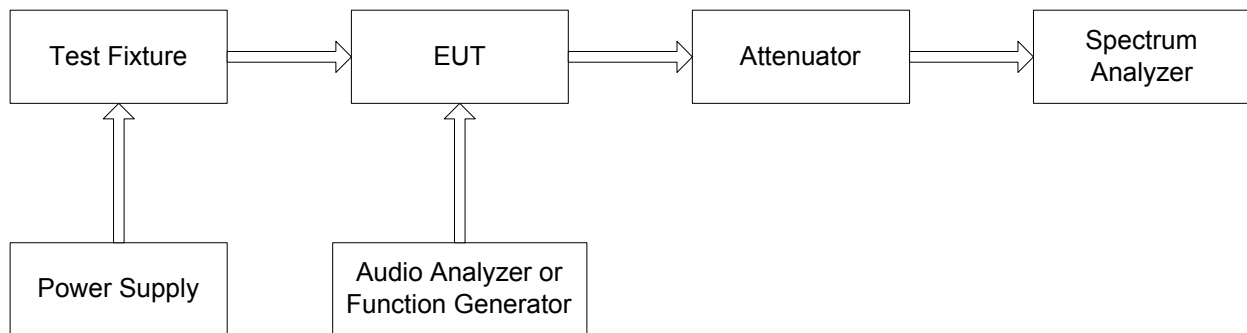


Fig.5

5.5.4 Test Equipment List

Equipment	Model Name	Manufacturer
EUT	SD-125E U2	Maxon CIC Corp.
Test Fixture	ACC-2001	Maxon CIC Corp.
Power Supply	IPS-30B03DD	Interact
Audio Analyzer	8903B	Agilent
Function Generator	33250A	Agilent
Attenuator	33-30-33	Weinschel
Spectrum Analyzer	FSP7	Rohde & Shwarz

5.5.5 Measurement Procedure

- The unit was turned-up in accordance with the alignment procedure stated in the Fig.5, and was loaded into a 50 ohm resistive termination.
- The antenna output terminal of the EUT was connected to the input of a 50 ohm spectrum analyzer through a matched 10 dB attenuator and notch filter.
- Transmitter was set to the maximum power output condition.
- The unit was modulated with a 2.5 kHz audio tone at an input level 16dB greater than that required 50% modulation. The spectrum was scanned from the lowest frequency generated in the equipment to the 10th harmonic of the carrier.
- The test performed at worst case mode. (High power and Narrow Band)
- The transmitter limit was applied according the $50+10\log_{10}(P)$: mean power in Watts) dB.
- The receiver limit was applied according the $50+10\log_{10}(P)$: mean power in Watts) dB.

5.5.6 Data 1

Mode (TX/RX)	Frequency (MHz)	Spurious Emissions		
		Level (dBm)	Limit (dBm)	Margin (dB)
Operating Frequency		440.025 MHz		
TX	880.050	-51.3	-20	31.3
	1320.075	-50.0		30.0
	2200.125	-42.6		22.6
	2640.150	-47.0		27.0
RX	394.925	-67.7	-57	10.7
	789.850	-77.9		20.9
	2369.550	-70.7		13.7
	3554.325	-72.4		15.4
Operating Frequency		455.025 MHz		
TX	1365.075	-43.4	-20	23.4
	2275.125	-46.1		26.1
RX	409.925	-63.6	-57	6.6
	819.850	-83.6		26.6
	2049.625	-77.0		20.0
	2459.550	-70.9		13.9
	3689.325	-70.4		13.4
Operating Frequency		469.975 MHz		
TX	1409.925	-43.6	-20	23.6
	2349.875	-47.4		27.4
RX	242.875	-60.0	-57	3.0
	2124.375	-71.8		14.8
	2549.250	-75.2		18.2
	2974.125	-70.5		13.5
	3399.000	-74.8		17.8
	3823.875	-74.2		17.2
	4248.750	-74.6		17.6

5.6 Field Strength of Spurious Radiation

Radiated spurious emissions are emissions from the equipment when transmitting load on frequency or frequencies which are outside of band sufficient to ensure transmission or information of required quality for the class of communication desired.

5.6.1 Specification

FCC Rules Part 2, Section 2.1053(a)
FCC Rules Part 90, Section 90.210
Industry Canada, RSS-119 Section 5.8

5.6.2 Method of Measurement

ANSI/TIA-603-C-2004 Section 2.2.12

5.6.3 Measurement Set-Up

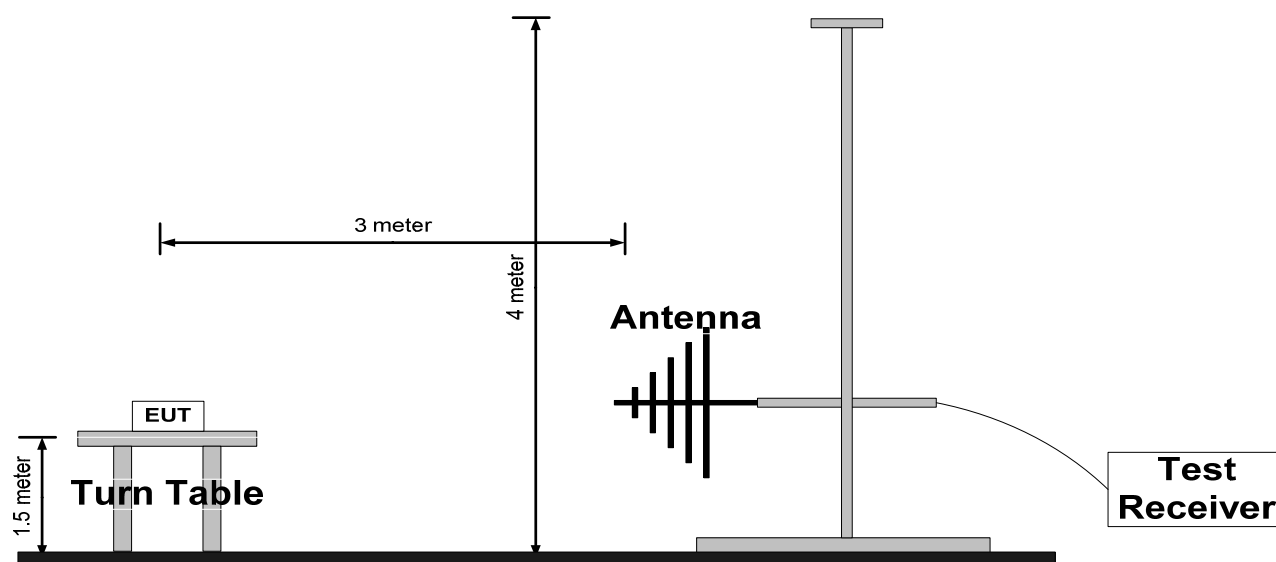


Fig.6

5.6.4 Test Equipment List

Equipment	Model Name	Manufacturer
EUT	SD-125E U2	Maxon CIC Corp.
Test Fixture	ACC-2001	Maxon CIC Corp.
Power Supply	IPS-30B03DD	Interact
Spectrum Analyzer	E7403A	Agilent
Bilog Antenna	VULB9160	Swalzbeck
Horn Antenna	BBHA 9120 D	Swalzbeck

5.6.5 Test Data

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.8
Power Output :	5 Watts
Reference Voltage :	12 Vdc
Channel Spacing :	Narrow Band
Limit :	50 + 10log ₁₀ P (-20dBm)

Frequency [MHz]	Spectrum Reading [dBuV/m]	Ant. Pol. [H/V]	S.G Level [dBm]	Ant. Gain [dBi]	Loss [dB]	Emission Level [dBm]	Limit [dBm]	Margin [dB]
440.025	83.0	H	-4.6	6.6	1.0	-12.2	-	-
880.050	45.6	H	-41.9	6.1	1.6	-49.6	-20	29.6
1320.075	44.4	-	-41.7	7.0	2.1	-50.8		26.8
2200.125	55.1	-	-28.3	9.1	2.7	-40.1		24.6
2640.150	49.6	-	-31.9	10.8	2.9	-45.6		33.3
455.025	83.2	H	-4.4	6.6	1.0	-12.0	-	-
910.050	41.5	H	-46.2	5.8	1.7	-53.7	-20	27.0
1365.075	54.8	-	-31.1	7.2	2.1	-40.4		24.8
2275.125	52.0	-	-31.0	9.5	2.7	-43.2		28.0
469.975	83.0	H	-4.6	6.6	1.0	-12.2	-	-
939.950	41.7	H	-46.2	5.6	1.7	-53.5	-20	28.8
1409.925	55.0	-	-30.7	7.3	2.2	-40.2		27.3
2349.875	52.3	-	-29.7	10.4	2.8	-42.9		33.1

Note :

1. The transmitter was tested while transmitting continuously while attached to a dummy load.
2. Transmitter was set to the high power output (5 watts) condition.
3. The spectrum was checked from 30 MHz up to the 10th harmonic of the carrier frequency.
4. All emission not reported were found to be more than 20dB below the limit.
5. The EUT was positioned through 3 orthogonal axis and worst-case are reported.
6. Transmitter was set to the high power output (5 watts) condition because the high power setting is the worst case emission condition.
7. The measurement has been made both narrow and wide band but the attached plots are for narrowband. There is no difference in the test result for the bandwidth setting.
8. ERP measurements were performed using the standard battery with full charged condition.
9. The test performed at worst case mode. (High power and Narrow Band)
10. The limit was applied according to the section 90.210(d) 50+10logP or -20dBm or 70dBc whichever is less.

5.7 Radiated Emission Test (Stand-by and Receive Mode)

Radiated emissions from 30 MHz to 1000 MHz were measured with a bandwidth of 120 kHz according to the methods defined in FCC Part 15.209. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.

5.7.1 Specification

FCC Rules Part 15, Section 15.209
Industry Canada, RSS-Gen Section 6

5.7.2 Method of Measurement

ANSI/TIA-603-C-2004 Section 2.2.12

5.7.3 Measurement Set-Up

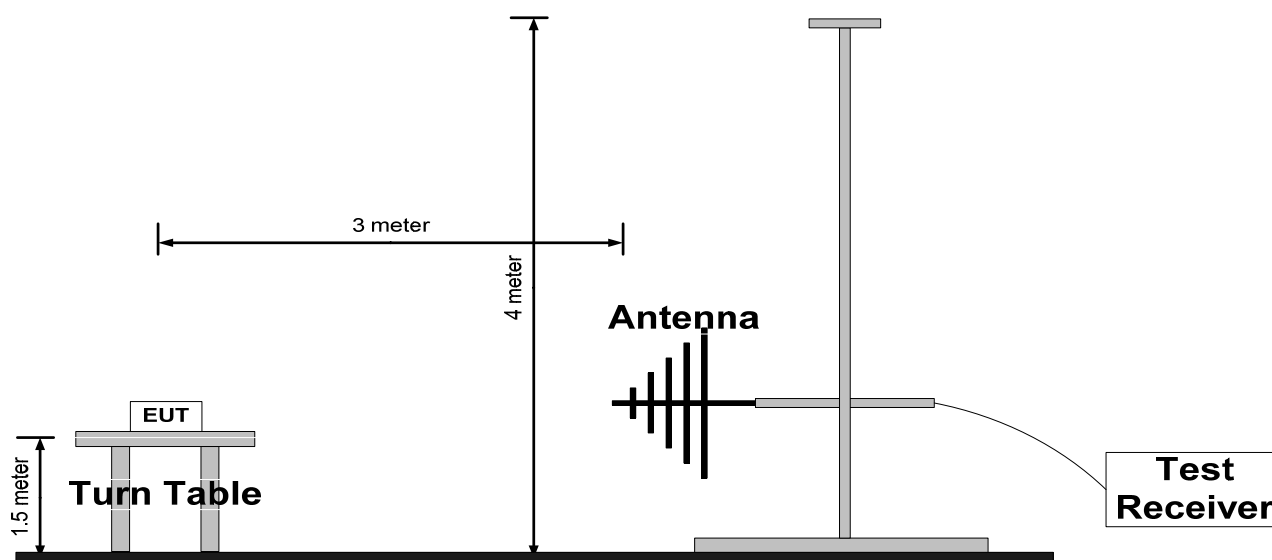


Fig.7

5.7.4 Test Equipment List

Equipment	Model Name	Manufacturer
EUT	SD-125E U2	Maxon CIC Corp.
Test Fixture	ACC-2001	Maxon CIC Corp.
Power Supply	IPS-30B03DD	Interact
Spectrum Analyzer	E7403A	Agilent
Bilog Antenna	VULB9160	Swalzbeck
Horn Antenna	BBHA 9120 D	Swalzbeck

5.7.5 Limit

Frequency Range (MHz)	Limit (dBuV)	
	Quasi-Peak	Average-Peak
30 ~ 88	40.0	N/A
88 ~ 216	43.5	N/A
216 ~ 960	46.0	N/A
Above 960	54.0	N/A

5.7.6 Test Result of Radiated Emission

EUT : SD-125E U2

Test distance : 3 m

Radiated Emission Test Result : **PASS**

Test data sheets follow.

Frequency [MHz]	Reading [dB μ V]	Polarization [*H/**V]	Ant.Factor [dB/m]	Cable Loss [dB]	Limit [dB μ V/m]	Emission Level [dB μ V /m]	Margin [dB]
1st Channel : 440.025 MHz							
394.925	10.22	V	15.67	4.51	43.50	30.40	13.10
394.925	15.42	H	15.67	4.51	43.50	35.60	7.90
789.850	-	V	12.00	6.68	46.00	-	-
789.850	-	H	12.31	6.68	46.00	-	-
2nd Channel : 455.025 MHz							
409.925	10.09	V	16.01	4.59	43.50	30.70	12.80
409.925	14.99	H	16.01	4.59	43.50	35.60	7.90
819.850	-	V	22.77	6.81	46.00	-	-
819.850	-	H	22.77	6.81	46.00	-	-
3rd Channel : 469.975 MHz							
384.875	10.14	V	15.43	4.43	46.00	30.00	16.00
384.875	14.94	H	15.43	4.43	46.00	34.80	11.20
849.750	-	V	22.96	6.92	46.00	-	-
879.750	-	H	23.28	7.06	46.00	-	-

Notes:

- * H : Horizontal polarization , ** V : Vertical polarization
- Emission Level = Reading + Antenna factor + Cable loss
- Margin value = Emission Level - Limit
- All other emissions not reported were more than 25dB below the permitted limit.
- Measurement uncertainty estimated at ± 4.08 dB.
The measurement uncertainty is given with a confidence of 95.45 % with the coverage factor, k=2.

5.8 Frequency Stability / Temperature Variation

5.8.1 Specification

FCC Rules Part 2, Section 2.1055
FCC Rules Part 90, Section 90.213
Industry Canada, RSS-119 Section 5.3

5.8.2 Method of Measurement

ANSI/TIA-603-C-2004 Section 2.2.2

5.8.3 Measurement Set-Up

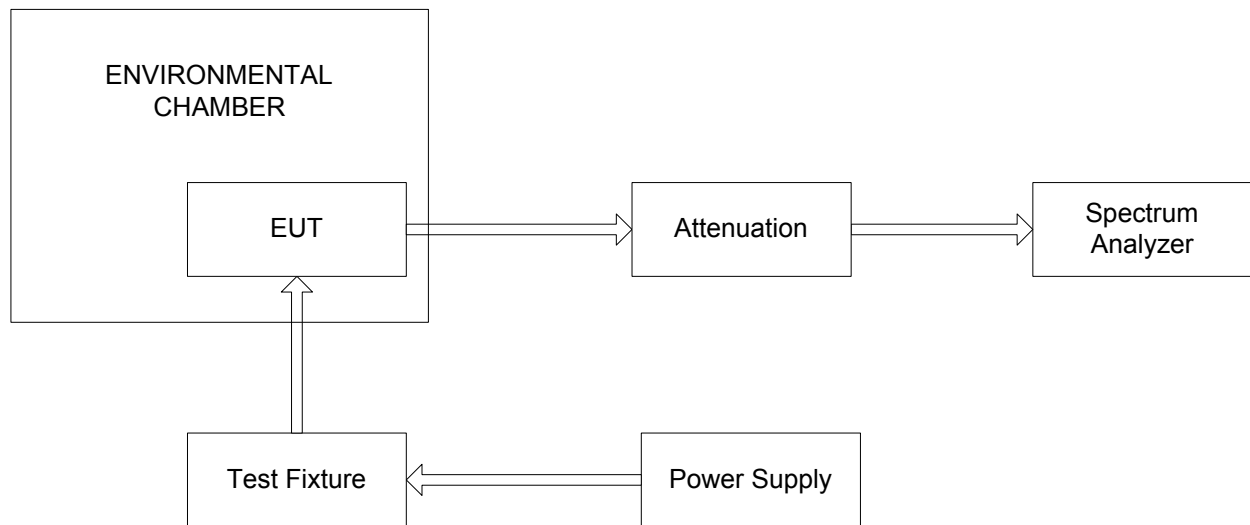


Fig.8

5.8.4 Test Equipment List

Equipment	Model Name	Manufacturer
EUT	SD-125E U2	Maxon CIC Corp.
Test Fixture	ACC-2001	Maxon CIC Corp.
Power Supply	IPS-30B03DD	Interact
Attenuator	33-30-33	Weinschel
Spectrum Analyzer	FSP7	Rohde & Shwarz
Environmental Chamber	EN-GLMP-54	Enex

5.8.5 Test Procedure

- The unit was turn-up in accordance with the alignment procedure stated in the Fig.7, and was loaded into a 50 ohm resistive termination.
- With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
- With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
- The temperature tests were performed for the worst case.
- FCC Limits (according to part 90.213) : $2.5 \times 10^{-6} \times \text{Frequency}$


5.8.6 Test Result

FCC Rules :	Part 2 §2.1055 & §90.231
IC Rules :	RSS-119 Section 5.3
Operating Frequency :	455.025 MHz
Power Output :	5 Watts
Modulation :	Non-Modulation
Reference Voltage :	12.0 Vdc

5.8.6.1 Data

Voltage (%)	Power Supply (Vdc)	Temperature (°C)	Frequency (MHz)	Deviation (ppm)	Limit (ppm)
100 %	12.0	-30	455.025142	0.31	2.5
100 %	12.0	-20	455.025214	0.47	2.5
100 %	12.0	-10	455.025160	0.35	2.5
100 %	12.0	0	455.025166	0.36	2.5
100 %	12.0	+10	455.025176	0.39	2.5
100 %	12.0	+20 (ref)	455.025128	0.28	2.5
100 %	12.0	+30	455.025178	0.39	2.5
100 %	12.0	+40	455.025152	0.33	2.5
100 %	12.0	+50	455.025145	0.32	2.5
100 %	12.0	+60	455.025058	0.13	2.5
85 %	10.2	+20	455.025184	0.40	2.5
115 %	13.8	+20	455.025150	0.33	2.5

5.8.6.2 Graph

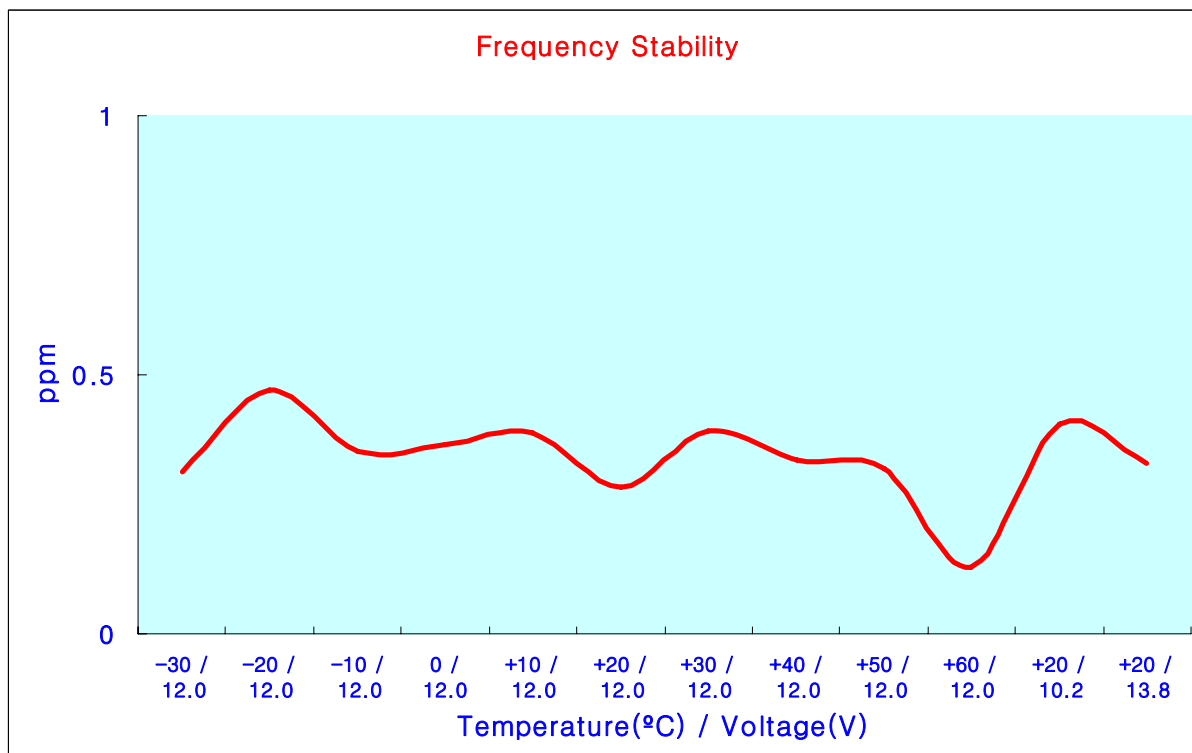

5.9 Transient Frequency Behavior

5.9.1 Specification

FCC Rules Part 90, Section 90.214
Industry Canada, RSS-119 Section 5.9

5.9.2 Method of Measurement

ANSI/TIA-603-C-2004 Section 2.2.19

5.9.3 Measurement Set-Up

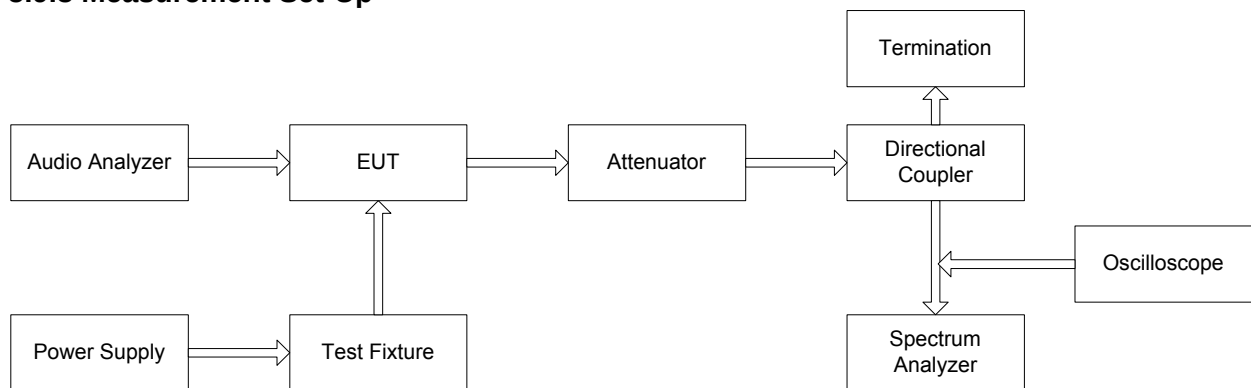


Fig.9

5.9.4 Test Equipment List

Equipment	Model Name	Manufacturer
EUT	SP7102	Maxon CIC Corp.
Power Supply	IPS-30B03DD	Interact
Audio Analyzer	8903B	Agilent
Attenuator	33-30-33	Weinschel
Directional Coupler	778D	Agilent
Termination	8173	Bird
Oscilloscope	TDS3032	Tektronix
Spectrum Analyzer	FSP7	Rohde & Shwarz

5.9.5 Test Procedure

- The unit was turn-up in accordance with the alignment procedure stated in the Fig.9, and was loaded into a 50 ohm resistive termination.
- Using the variable attenuator the transmitter level was set to 40 dB below the test receivers maximum input level, then the transmitter was turned off.
- With the transmitter off the signal generator was set 20dB below the level of the transmitter in the above step, this level will be maintained with the signal generator through-out the test.
- Reduce the attenuation between the transmitter and the RF detector by 30 dB.
- With the levels set as above the transient frequency behavior was observed & recorded.
- Requirements

5.9.6 Limit

Transient Frequency Difference Limits

Time Interval	Max. Permitted Frequency Difference for 25 and 30 kHz Channel Spacing (in kHz)	Max. Permitted Frequency Difference for 12.5 and 15 kHz Channel Spacing (in kHz)
t_1 or t_3	25	12.5
t_2	12.5	6.25

Transient Duration Limits

Time Intervals	Frequency Ranges (MHz)		
Frequency	30 to 174	406 to 512	806 to 940
t_1	5.0 ms	10.0 ms	20.0 ms
t_2	20.0 ms	25.0 ms	50.0 ms
t_3	5.0 ms	10.0 ms	10.0 ms

The transient frequency behavior of the transmitter is the variation in time of the transmitter frequency difference from the nominal frequency of the transmitter when the RF output power is switched on and off.

t_{on} : according to the method of measurement described the switch-on instant t_{on} of a transmitter is defined by the condition when the output power, measured at the antenna terminal, exceeds 0,1 % of the nominal power.

t_1 : period of time starting at t_{on} and finishing.

t_2 : period of time starting at the end of t_1 and finishing.

t_{off} : switch-off instant defined by the condition when the nominal power falls below 0,1 % of the nominal power.

t_3 : period of time that finishing at t_{off} and starting.

5.9.7 Test Data

Transient Period	Transient Frequency Period (ms)
t_1	« 10.0 ms
t_2	« 25.0 ms
t_3	« 10.0 ms
Uncertainty (%)	10

5.10 RF Exposure Requirement

5.10.1 Method of Measurement

These devices are not exempted from compliance does not exceed the Commission's RF exposure guidelines. Unless a device operates at substantially low power levels, with a low gain antenna(s), supporting information is generally needed to establish the various potential operating configurations and exposure conditions of a transmitter and its antenna(s) in order to determine compliance with the RF exposure guidelines.

In order to demonstrate compliance with MPE requirements (see Section 2.1091), the following information is typically needed:

Calculation that estimates the minimum separation distance (20 cm or more) between an antenna and persons required to satisfy power density limits defined for free space.

Antenna installation and device operating instructions for installers (professional/unskilled users), and the parties responsible for ensuring compliance with the RF exposure requirement Any caution statements and/or warning labels that are necessary in order to comply with the exposure limits Any other RF exposure related issues that may affect MPE compliance.

5.10.2 Limits

FCC 1.1310:- The criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in 1.1307(b).

LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time (minutes)
(A) Limits for Occupational/Control Exposures				
300 - 1500	-	-	f / 300	6
(B) Limits for General Population/Uncontrolled Exposure				
300 - 1500	-	-	f / 1500	30

※ f = frequency in MHz

5.10.3 Result

Frequency [MHz]	Conducted Power [dBm]	Antenna Gain [dBi]	Calculated EIRP [mW]	Duty Cycle [%]	The time averaged power over 30 minutes [mWatt]	Laboratory's Recommended Minimum RF Safety Distance r [Cm]	Power Density in mW/cm ² at Formula When r=20Cm [mW/cm ²]	Limit (f/1500) [mW/cm ²]
440.025	37.17	6.00	20749.14	50	10374.57	53.05	2.0640	0.2934
455.025	36.87	6.00	19364.22	50	9682.11	50.40	1.9262	0.3034
469.975	36.85	6.00	19275.25	50	9637.62	49.48	1.9173	0.3133

Calculation Method of RF Safety Distance:

$$S = \frac{PG}{4\pi r^2} = \frac{EIRP}{4\pi r^2}$$

- P : power input to the antenna in mW
 EIRP : Equivalent (effective) isotropic radiated power.
 S : power density mW/cm²
 G : numeric gain of antenna relative to isotropic radiator
 R : distance to centre of radiation in cm

FCC radio frequency exposure limits may be exceeded at distances closer than r cm from the antenna of this device

$$r = \sqrt{\frac{PG}{4\pi S}} = \sqrt{\frac{EIRP}{4\pi S}}$$

Note :


1. $S = (f/1500) \text{ mW/cm}^2$ for Limits for General Population/Uncontrolled Exposures.
2. The time averaged power over 30 minutes will be equaled Output Power.
3. Minimum calculated separation distance between antenna and persons required : 53.05 Cm
4. The power density at a distance of 20Cm calculated from the formula is far above the limit of $(f/1500) \text{ mW/cm}^2$.
5. The maximum power density is 2.0640 mW/cm² at 440.025 MHz..
6. Complies if the user is advised of the above safe distances in the appropriate documentation.

6. TEST PLOT

6.1 99% Bandwidth

6.1.1 Low Channel / Low Power / F1D


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	440.025 MHz
Channel :	Low Channel
Power Output :	1 Watt
Channel Spacing :	Narrow Band
Modulation Signal :	9600 bps
Emission Mask :	99% Bandwidth
Reference Voltage :	12 Vdc

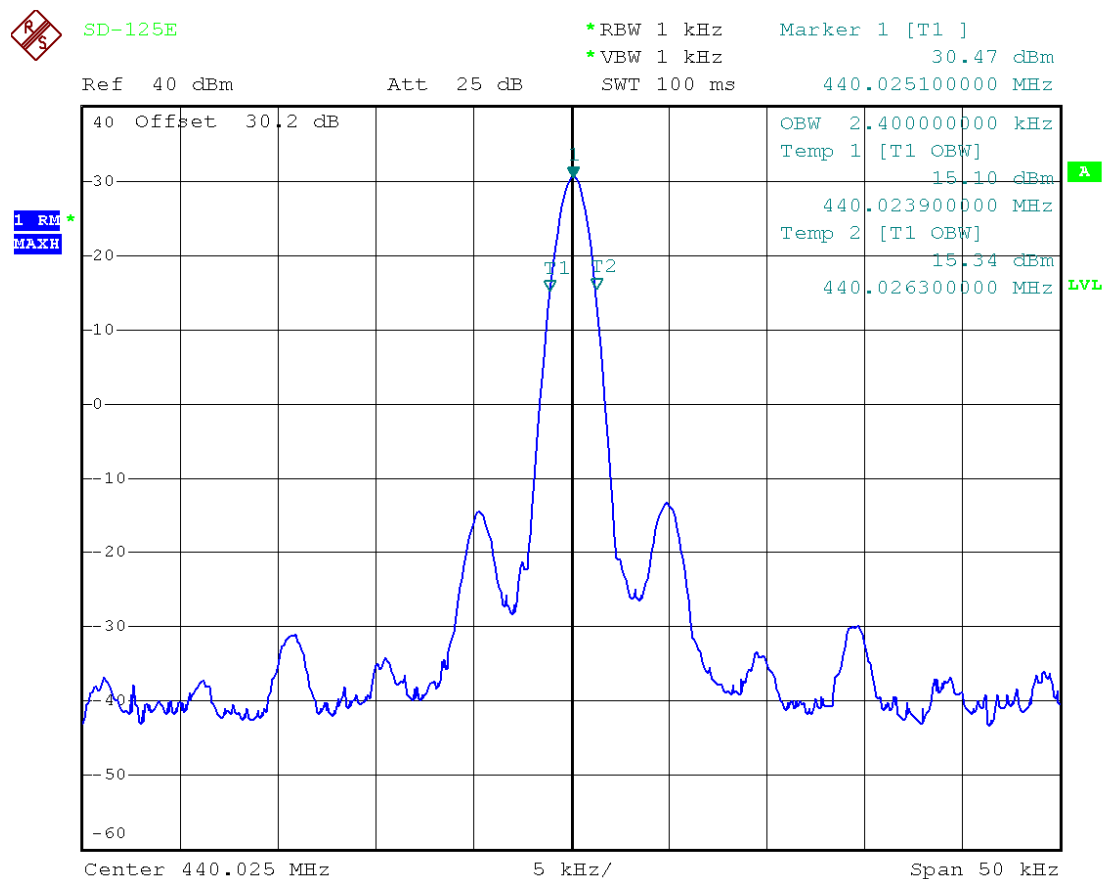

Date: 9.AUG.2008 18:57:48

6.1.2 Low Channel / Low Power / F3E / Narrow Band


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	440.025 MHz
Channel :	Low Channel
Power Output :	1 Watt
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	99% Bandwidth
Reference Voltage :	12 Vdc

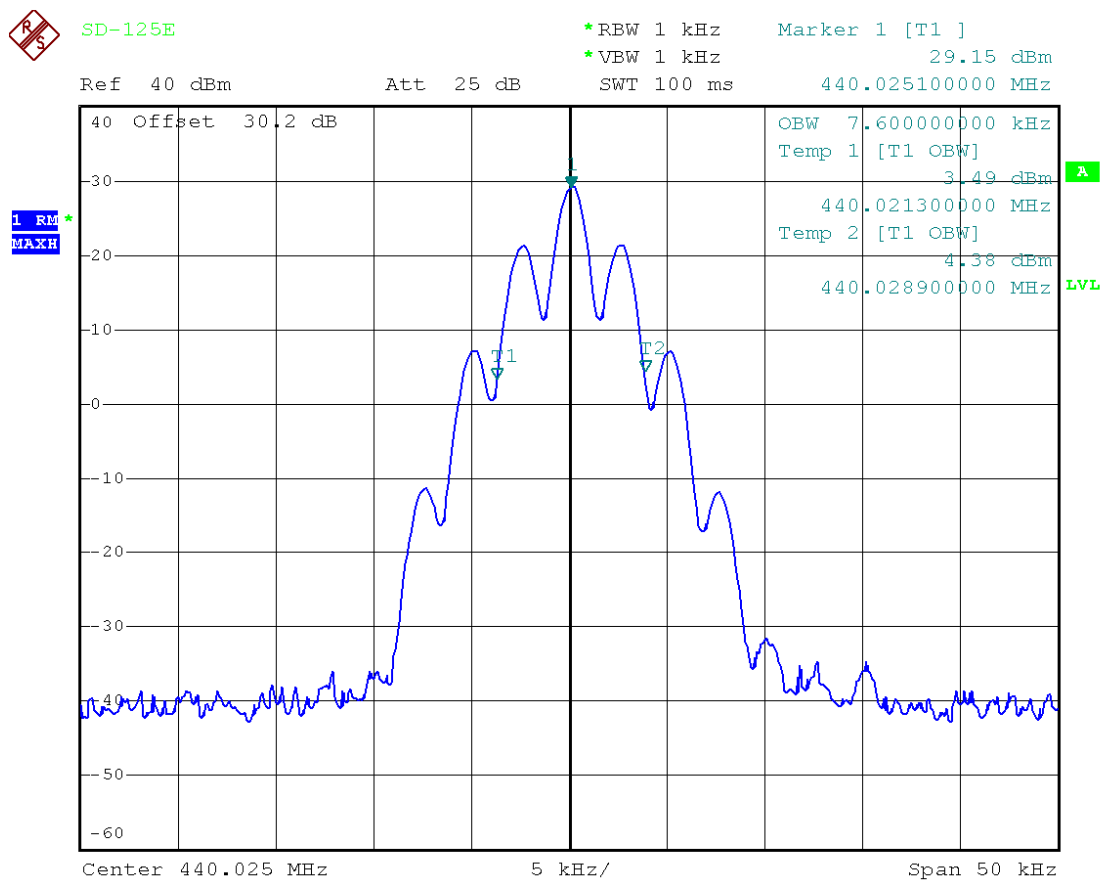

Date: 9.AUG.2008 18:56:06

6.1.3 Low Channel / Low Power / F3E / Wide Band


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	440.025 MHz
Channel :	Low Channel
Power Output :	1 Watt
Channel Spacing :	Wide Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	99% Bandwidth
Reference Voltage :	12 Vdc

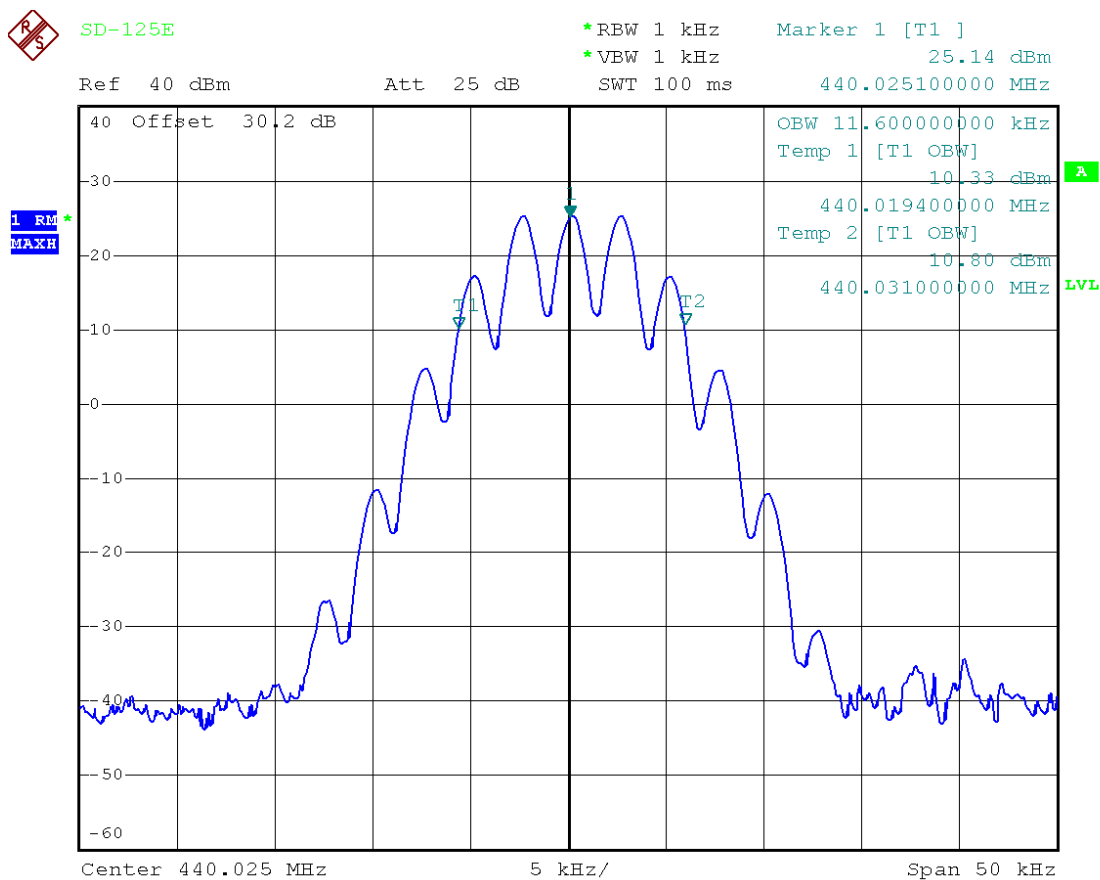

Date: 9.AUG.2008 18:56:40

6.1.4 Low Channel / High Power / F1D


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	440.025 MHz
Channel :	Low Channel
Power Output :	5 Watt
Channel Spacing :	Narrow Band
Modulation Signal :	9600 bps
Emission Mask :	99% Bandwidth
Reference Voltage :	12 Vdc

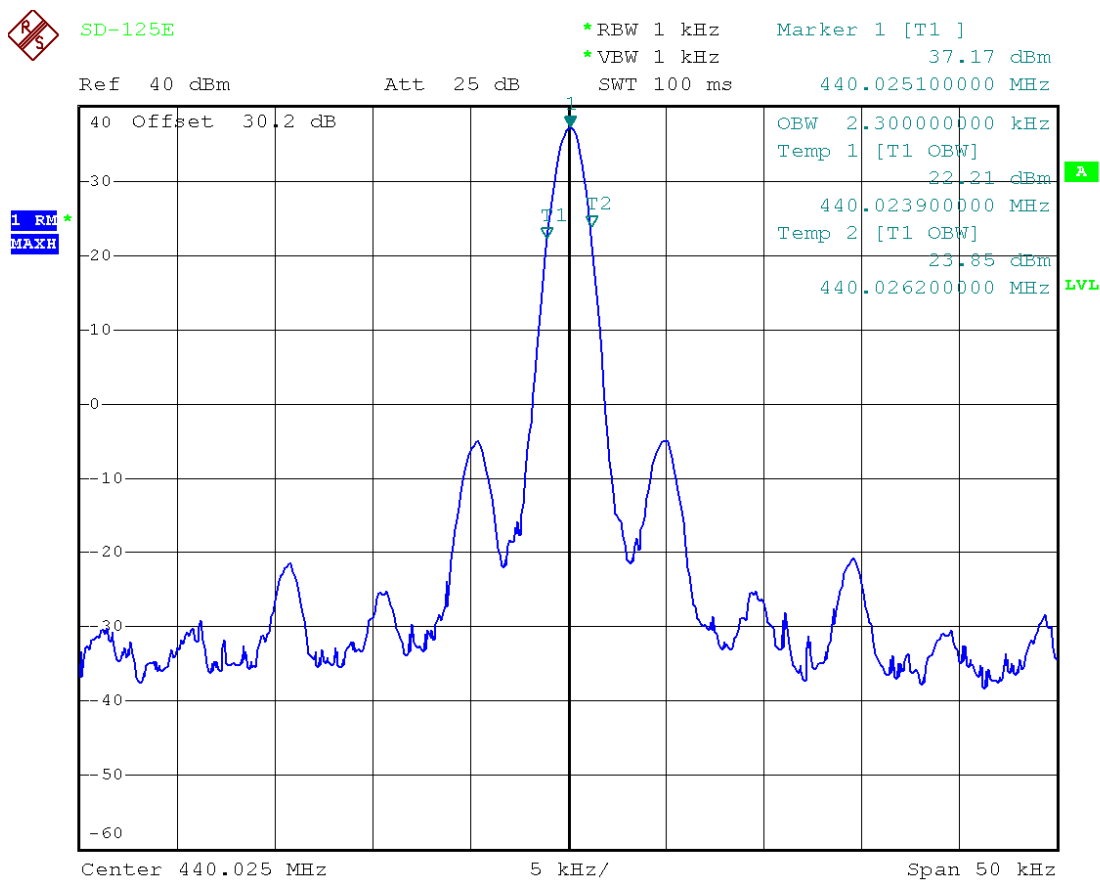

Date: 9.AUG.2008 19:01:48

6.1.5 Low Channel / high Power / F3E / Narrow Band

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	440.025 MHz
Channel :	Low Channel
Power Output :	5 Watt
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	99% Bandwidth
Reference Voltage :	12 Vdc

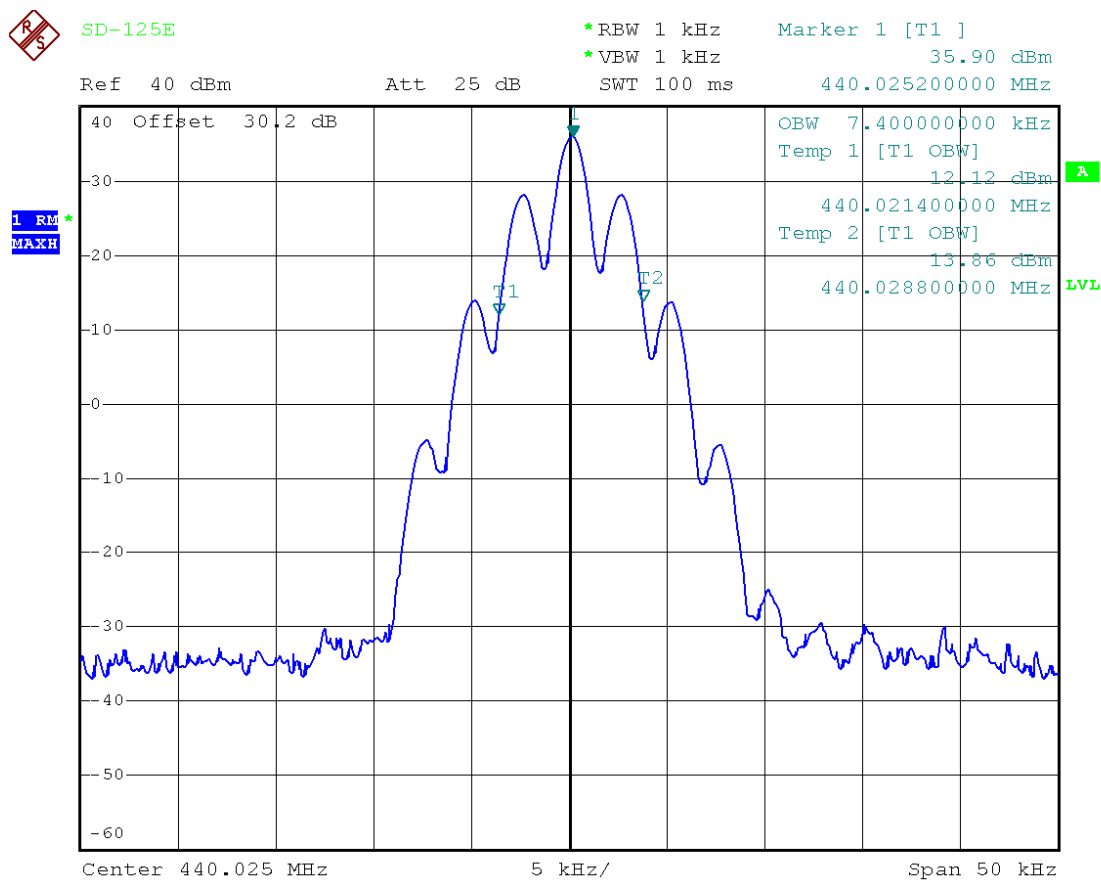

Date: 9.AUG.2008 18:48:04


6.1.6 Low Channel / High Power / F3E / Wide Band

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	440.025 MHz
Channel :	Low Channel
Power Output :	5 Watt
Channel Spacing :	Wide Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	99% Bandwidth
Reference Voltage :	12 Vdc



SD-125E

*RBW 1 kHz Marker 1 [T1]
*VBW 1 kHz 32.01 dBm
SWT 100 ms 440.025250000 MHz

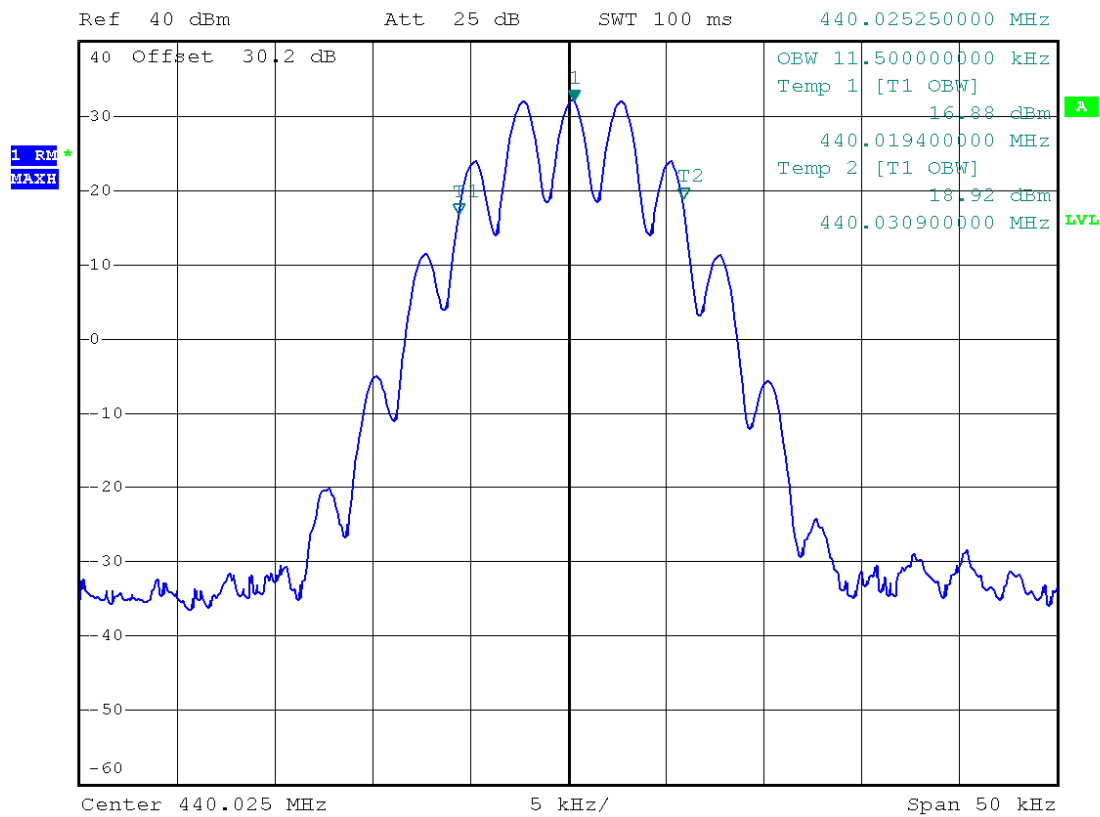

Date: 9.AUG.2008 18:46:37


6.1.7 Middle Channel / Low Power / F1D

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	455.025 MHz
Channel :	Middle Channel
Power Output :	1 Watt
Channel Spacing :	Narrow Band
Modulation Signal :	9600 bps
Emission Mask :	99% Bandwidth
Reference Voltage :	12 Vdc



SD-125E


*RBW 1 kHz Marker 1 [T1]
*VBW 1 kHz 30.96 dBm
Ref 40 dBm Att 25 dB SWT 100 ms 455.025100000 MHz

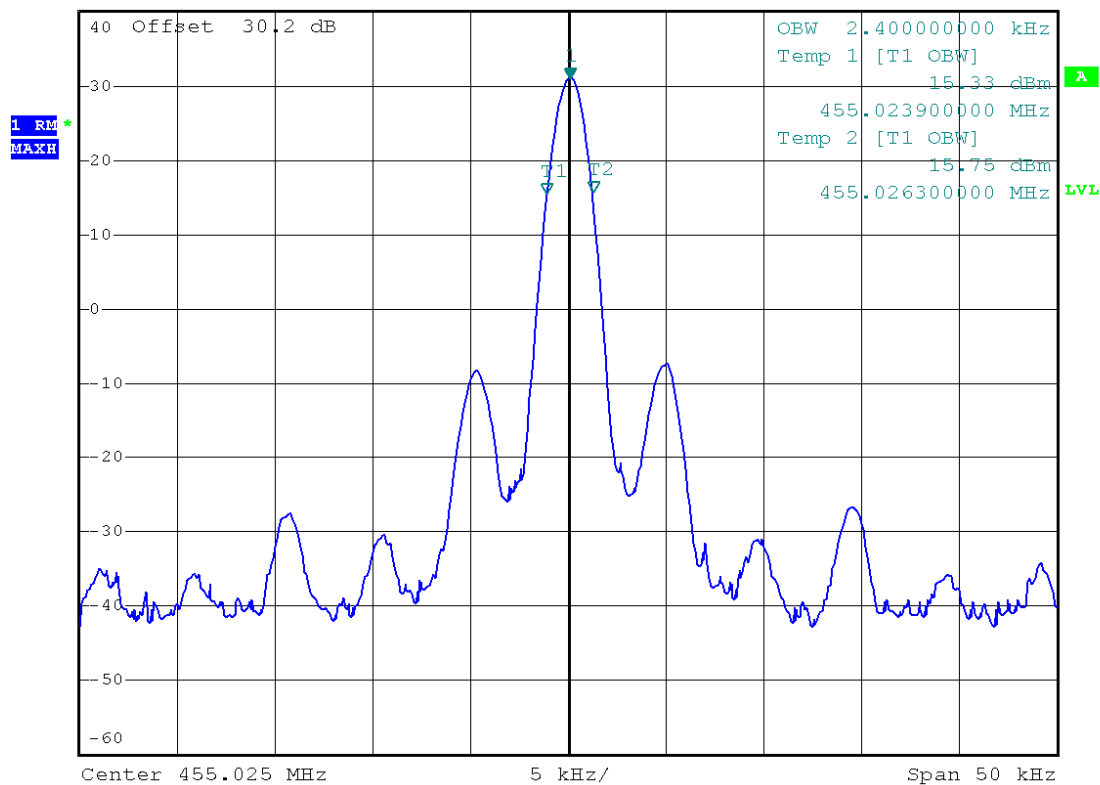

Date: 9.AUG.2008 18:58:37

6.1.8 Middle Channel / Low Power / F3E / Narrow Band

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	455.025 MHz
Channel :	Middle Channel
Power Output :	1 Watt
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	99% Bandwidth
Reference Voltage :	12 Vdc

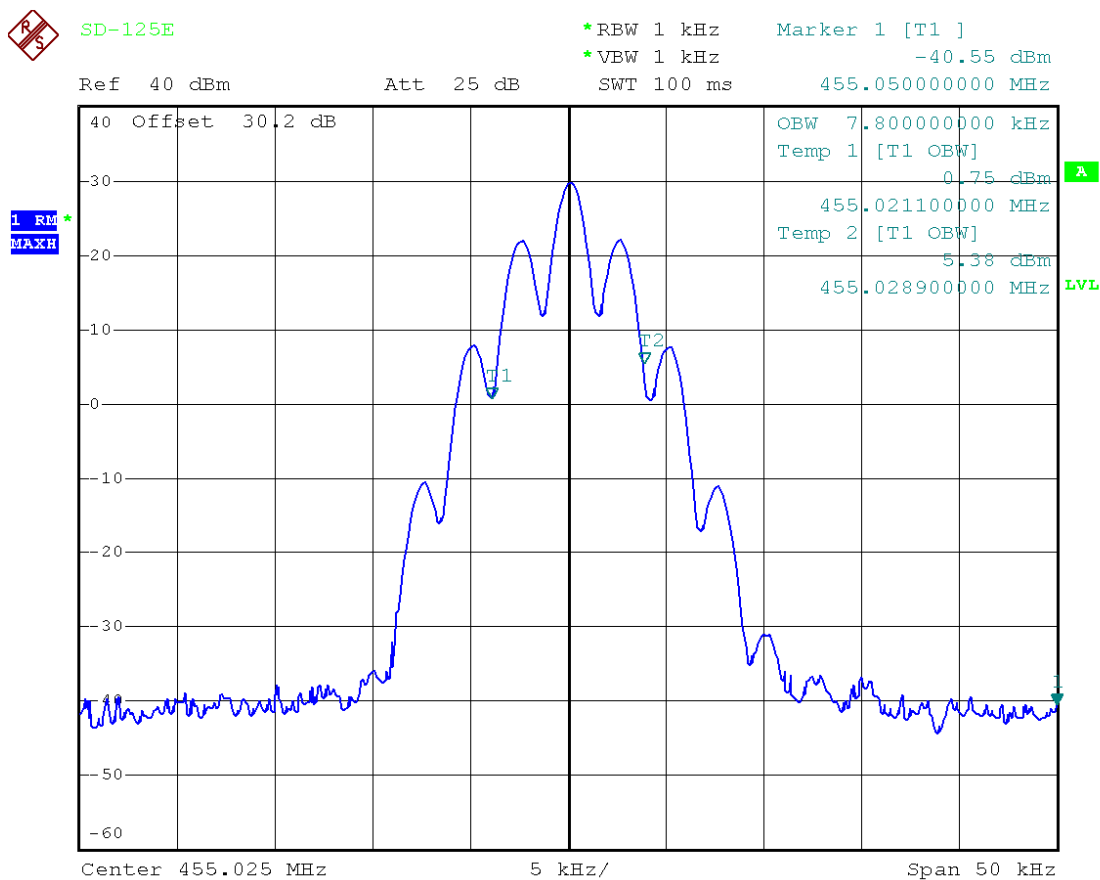

Date: 9.AUG.2008 18:55:18


6.1.9 Middle Channel / Low Power / F3E / Wide Band

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	455.025 MHz
Channel :	Middle Channel
Power Output :	1 Watt
Channel Spacing :	Wide Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	99% Bandwidth
Reference Voltage :	12 Vdc



SD-125E

*RBW 1 kHz Marker 1 [T1]
*VBW 1 kHz -41.39 dBm
SWT 100 ms 455.050000000 MHz

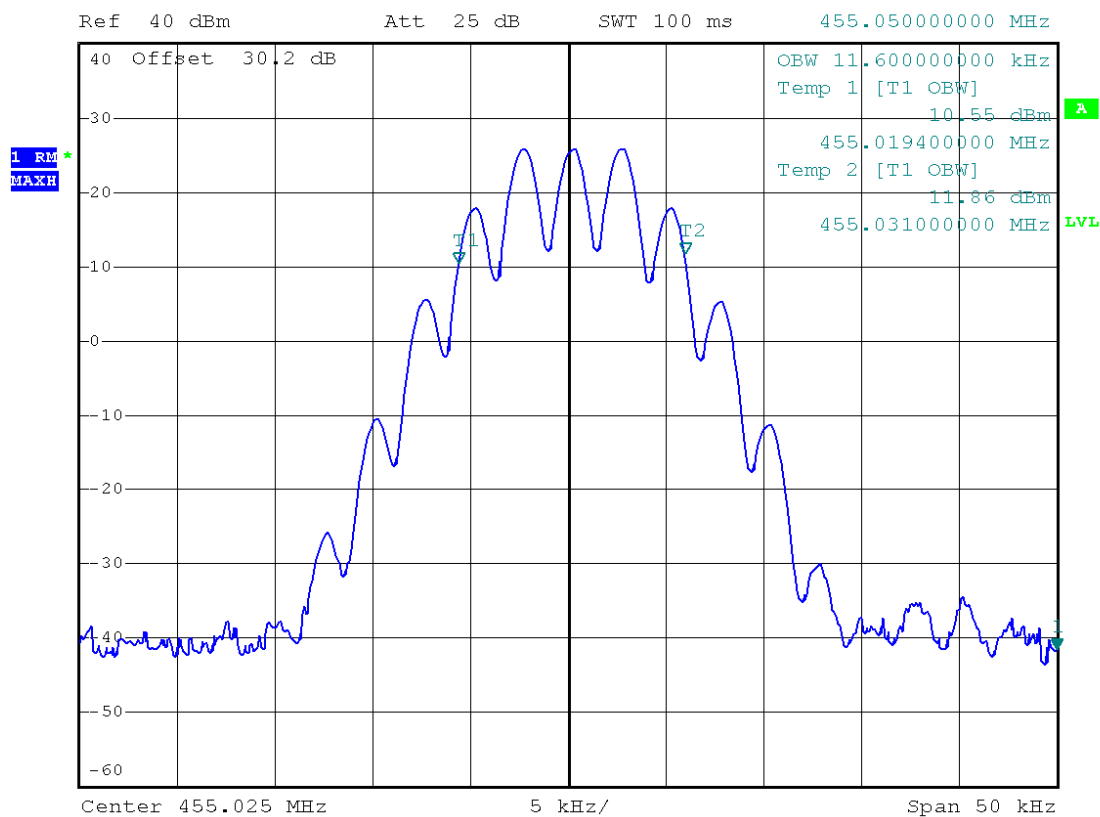

Date: 9.AUG.2008 18:54:41


6.1.10 Middle Channel / High Power / F1D

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	455.025 MHz
Channel :	Middle Channel
Power Output :	5 Watt
Channel Spacing :	Narrow Band
Modulation Signal :	9600 bps
Emission Mask :	99% Bandwidth
Reference Voltage :	12 Vdc



SD-125E

*RBW 1 kHz Marker 1 [T1]
*VBW 1 kHz 37.02 dBm
SWT 100 ms 455.025100000 MHz

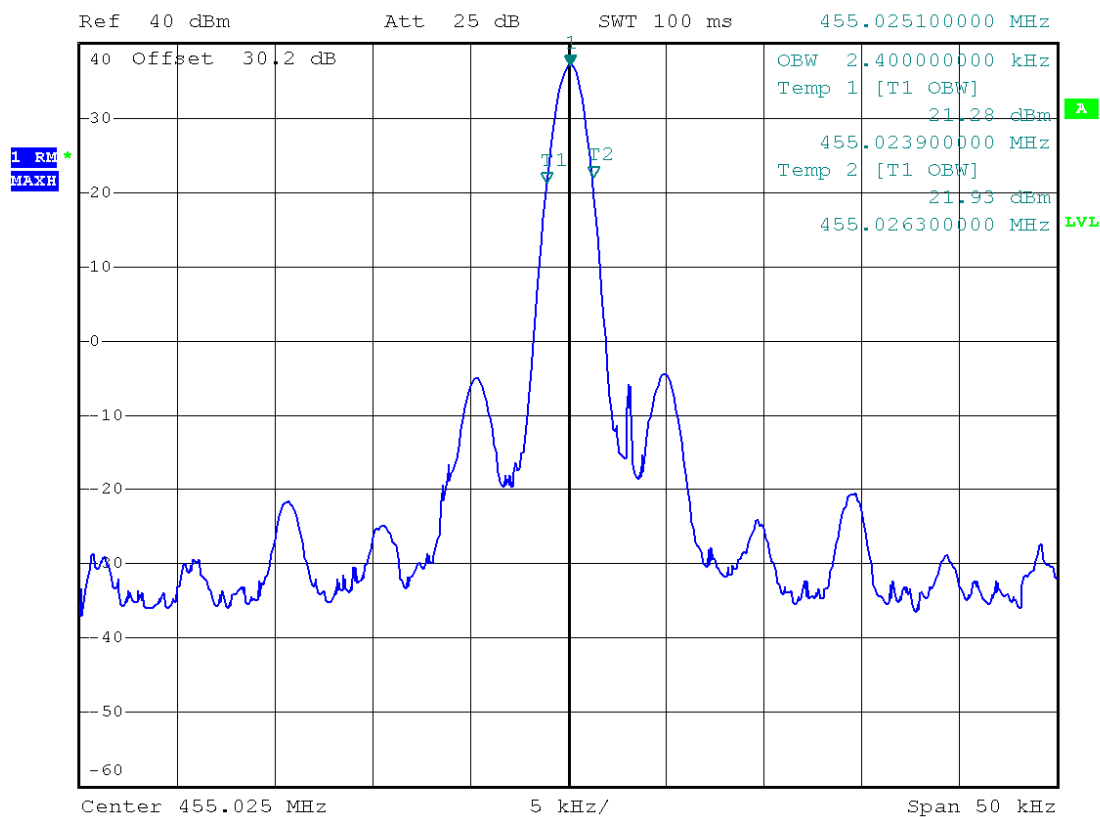

Date: 9.AUG.2008 19:00:51


6.1.11 Middle Channel / high Power / F3E / Narrow Band

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	455.025 MHz
Channel :	Middle Channel
Power Output :	5 Watt
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	99% Bandwidth
Reference Voltage :	12 Vdc



SD-125E

*RBW 1 kHz Marker 1 [T1]
*VBW 1 kHz 35.71 dBm
SWT 100 ms 455.025200000 MHz

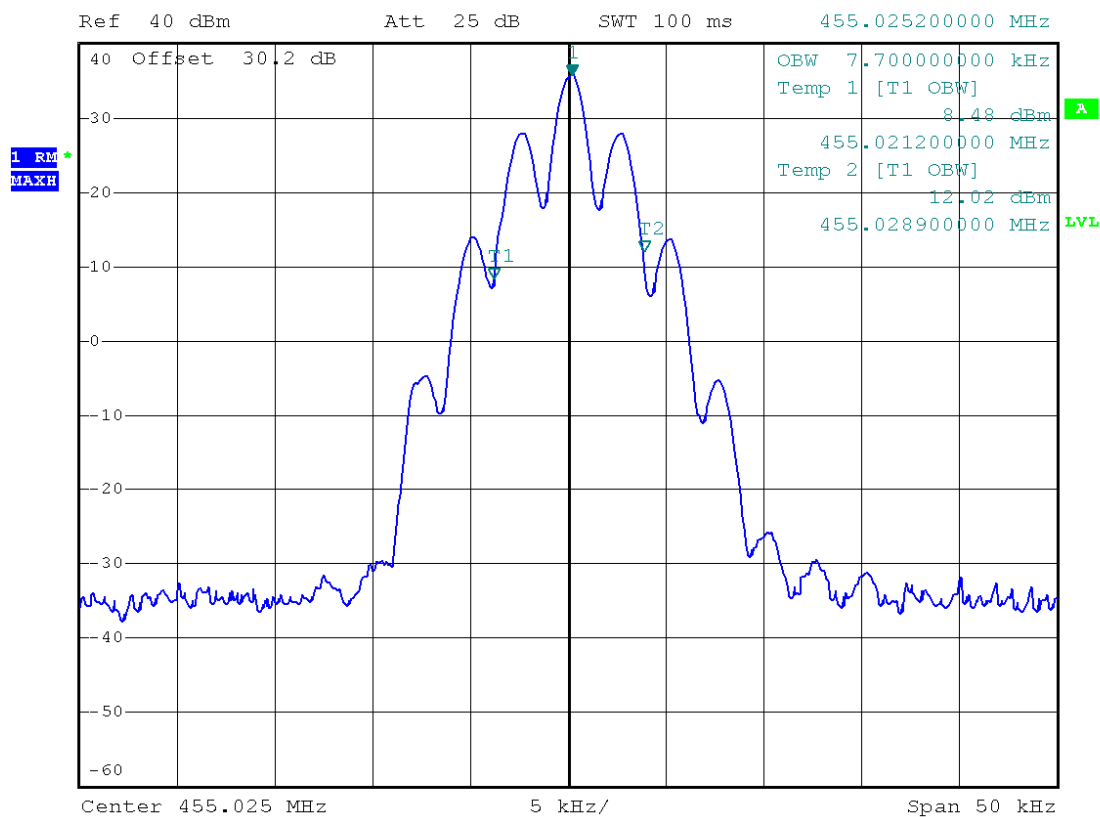

Date: 9.AUG.2008 18:49:03


6.1.12 Middle Channel / High Power / F3E / Wide Band

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	455.025 MHz
Channel :	Middle Channel
Power Output :	5 Watt
Channel Spacing :	Wide Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	99% Bandwidth
Reference Voltage :	12 Vdc



SD-125E

*RBW 1 kHz Marker 1 [T1]
*VBW 1 kHz 31.74 dBm
SWT 100 ms 455.025200000 MHz

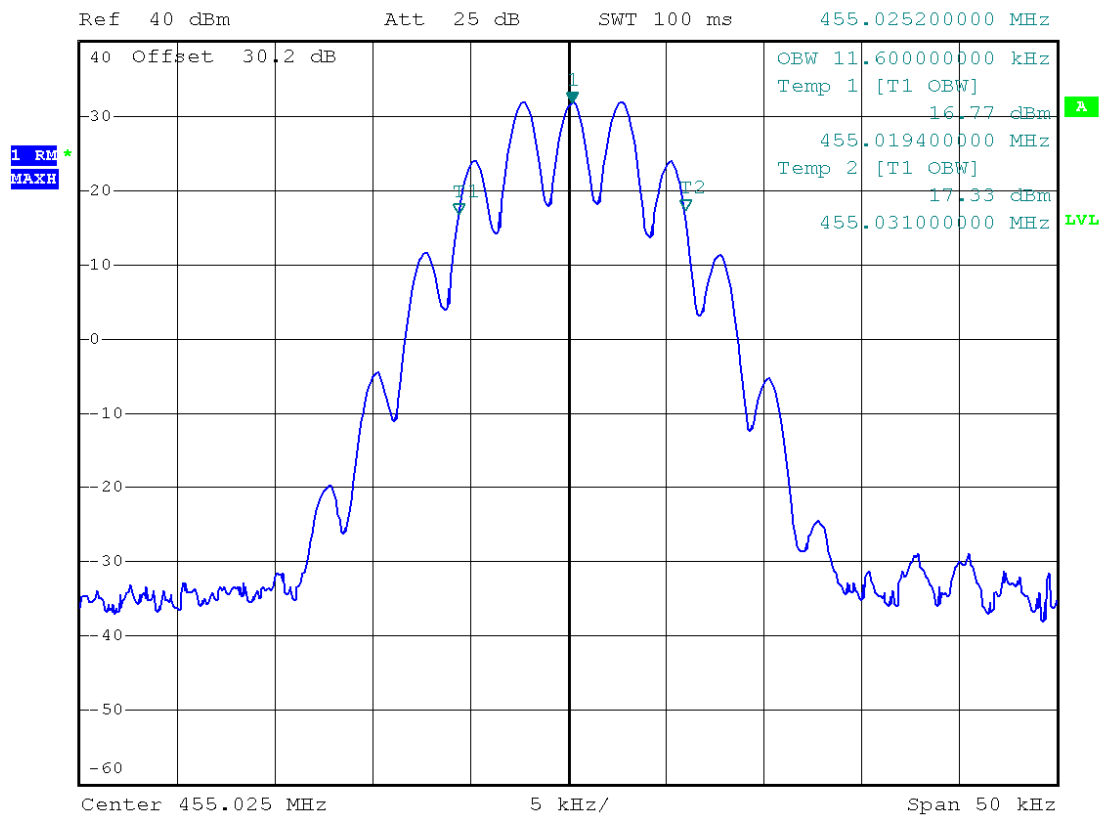

Date: 9.AUG.2008 18:49:48


6.1.13 High Channel / Low Power / F1D

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	469.975 MHz
Channel :	High Channel
Power Output :	1 Watt
Channel Spacing :	Narrow Band
Modulation Signal :	9600 bps
Emission Mask :	99% Bandwidth
Reference Voltage :	12 Vdc



SD-125E


*RBW 1 kHz Marker 1 [T1]
*VBW 1 kHz 30.97 dBm
SWT 100 ms 469.975200000 MHz

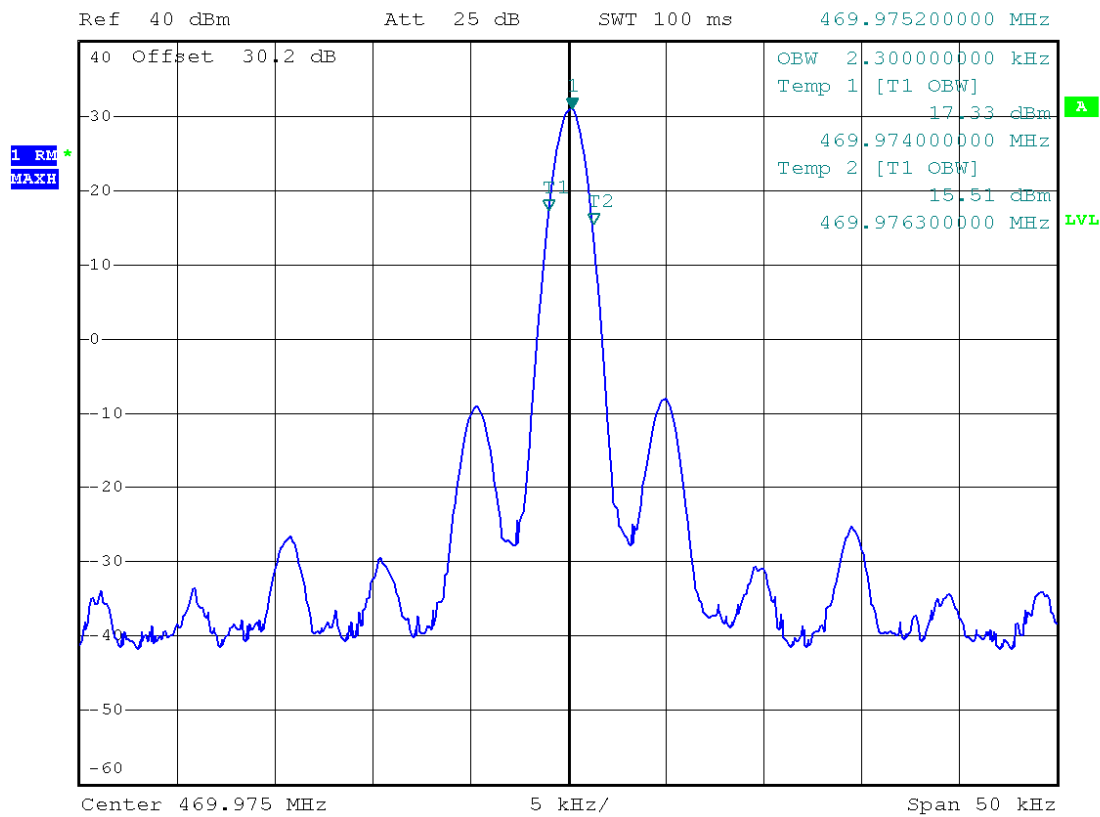

Date: 9.AUG.2008 18:59:17

6.1.14 High Channel / Low Power / F3E / Narrow Band


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	469.975 MHz
Channel :	High Channel
Power Output :	1 Watt
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	99% Bandwidth
Reference Voltage :	12 Vdc

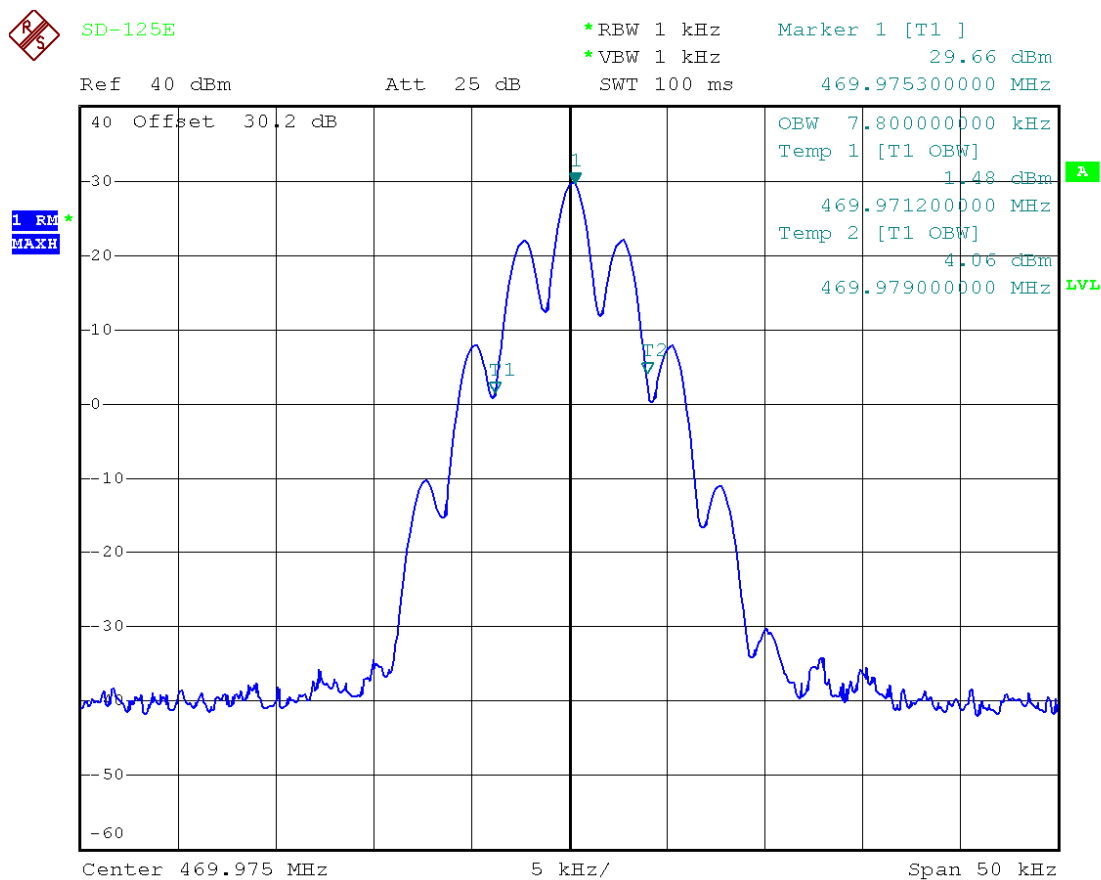

Date: 9.AUG.2008 18:53:01

6.1.15 High Channel / Low Power / F3E / Wide Band


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	469.975 MHz
Channel :	High Channel
Power Output :	1 Watt
Channel Spacing :	Wide Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	99% Bandwidth
Reference Voltage :	12 Vdc

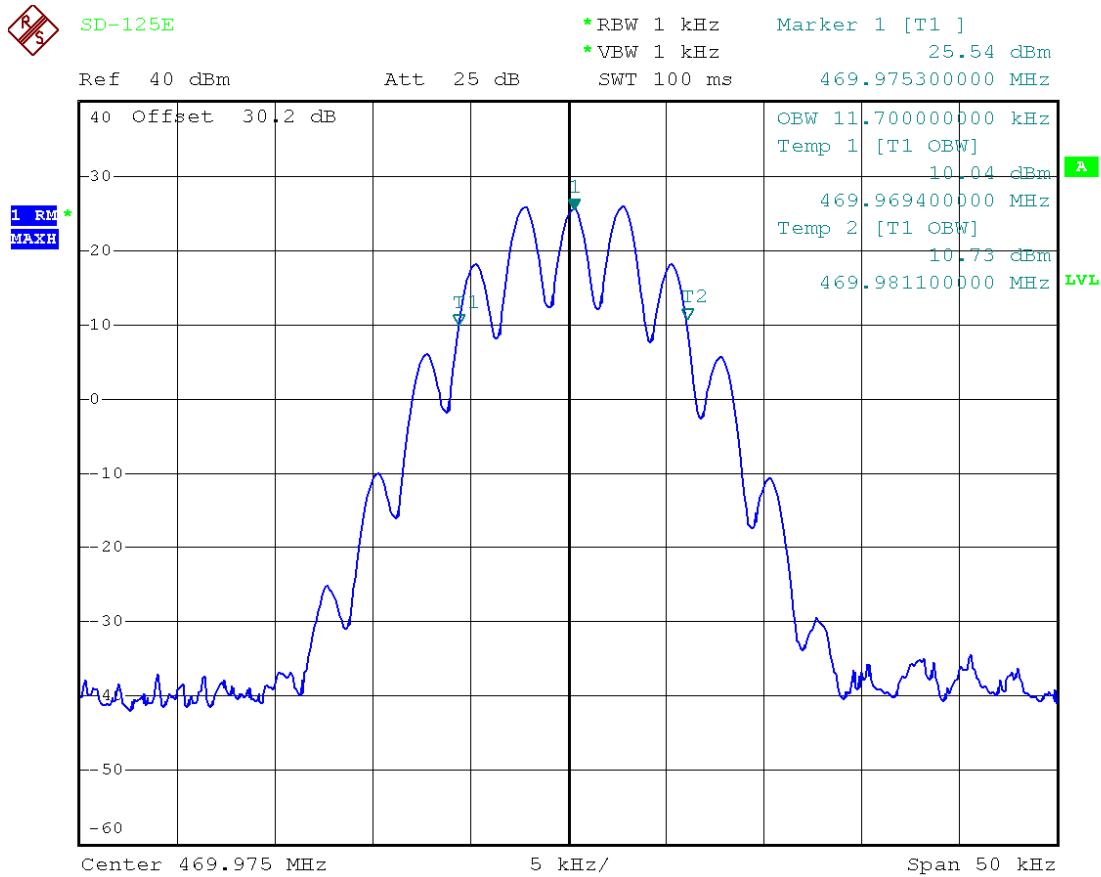

Date: 9.AUG.2008 18:53:46

6.1.16 High Channel / High Power / F1D

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	469.975 MHz
Channel :	High Channel
Power Output :	5 Watt
Channel Spacing :	Narrow Band
Modulation Signal :	9600 bps
Emission Mask :	99% Bandwidth
Reference Voltage :	12 Vdc

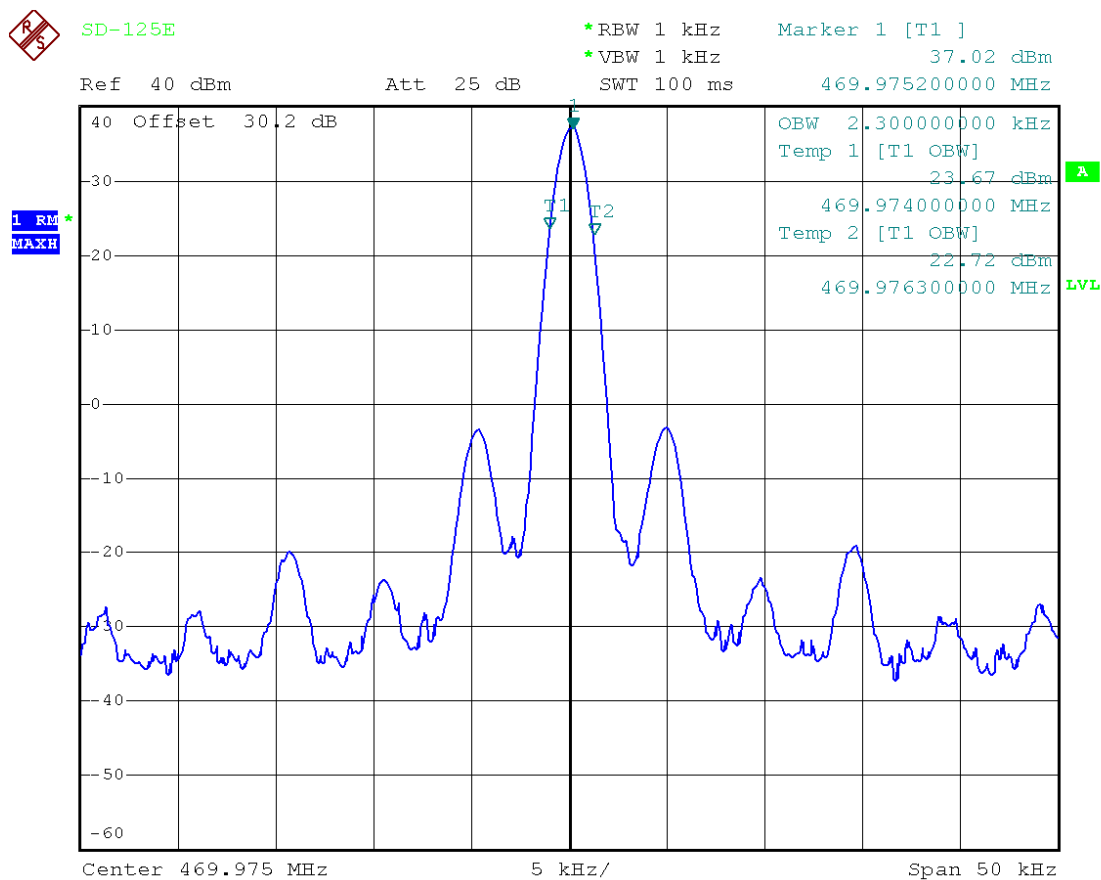

Date: 9.AUG.2008 19:00:10


6.1.17 High Channel / high Power / F3E / Narrow Band

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	469.975 MHz
Channel :	High Channel
Power Output :	5 Watt
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	99% Bandwidth
Reference Voltage :	12 Vdc



SD-125E

*RBW 1 kHz Marker 1 [T1]
*VBW 1 kHz 35.68 dBm
SWT 100 ms 469.975300000 MHz

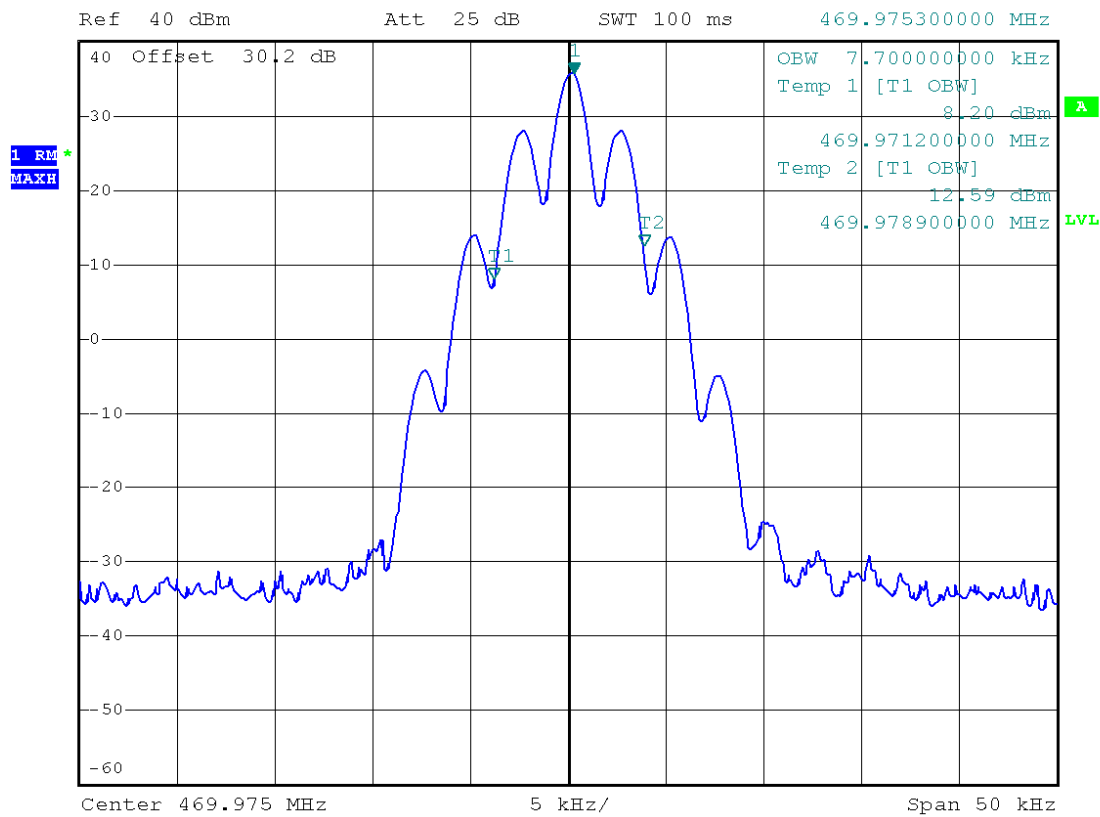

Date: 9.AUG.2008 18:51:48


6.1.18 High Channel / High Power / F3E / Wide Band

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	469.975 MHz
Channel :	High Channel
Power Output :	5 Watt
Channel Spacing :	Wide Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	99% Bandwidth
Reference Voltage :	12 Vdc



SD-125E

*RBW 1 kHz Marker 1 [T1]
*VBW 1 kHz 31.51 dBm
SWT 100 ms 469.975300000 MHz

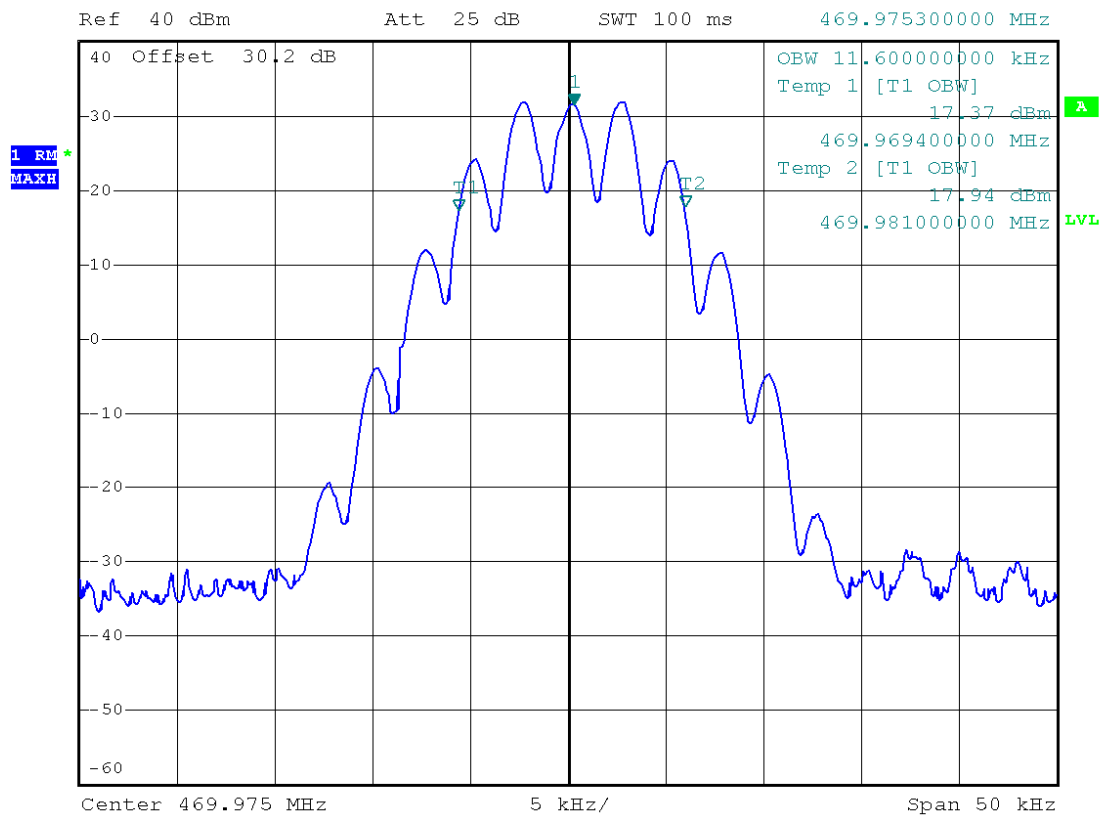


Date: 9.AUG.2008 18:50:32

6.2 Emission Mask

6.2.1 Low Channel / Low Power / F1D


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	440.025 MHz
Channel :	Low Channel
Power Output :	1 Watt
Channel Spacing :	Narrow Band
Modulation Signal :	9600 bps
Emission Mask :	Mask D
Reference Voltage :	12 Vdc

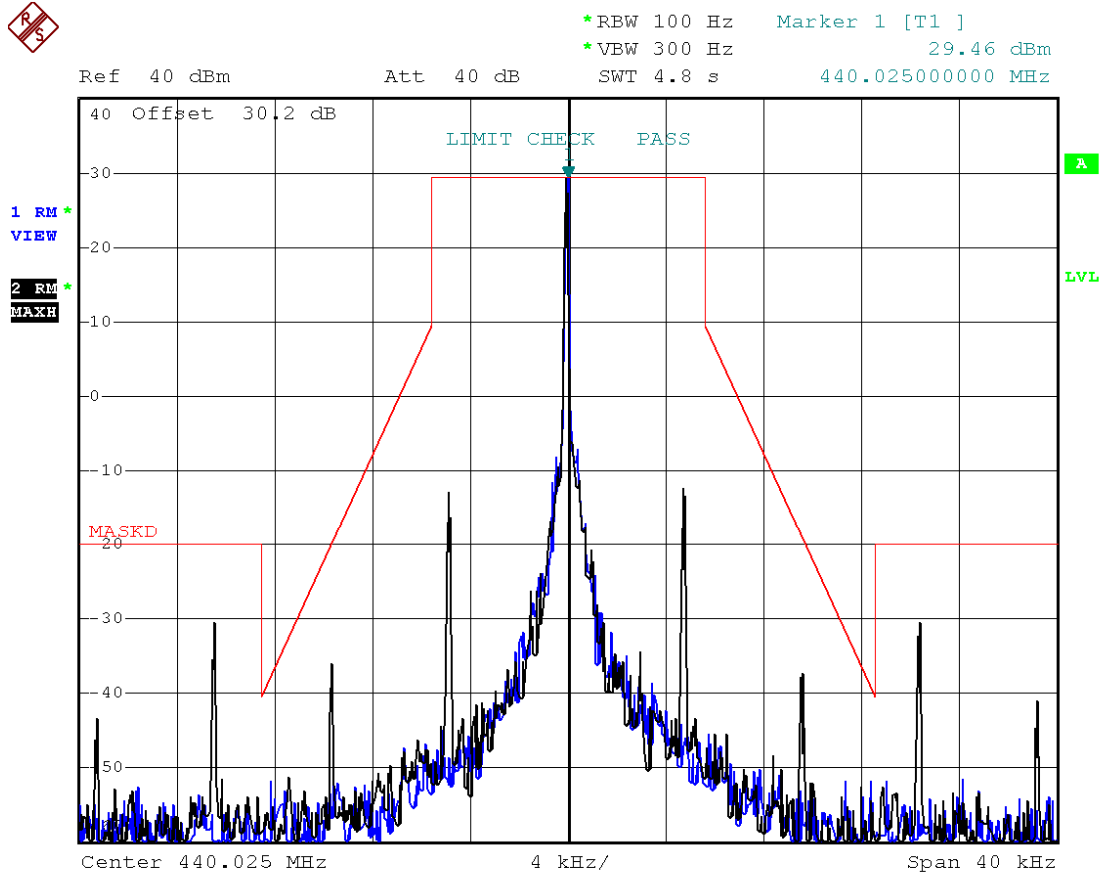

Date: 18.AUG.2008 20:00:21

6.2.2 Low Channel / Low Power / F3E / Narrow Band

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	440.025 MHz
Channel :	Low Channel
Power Output :	1 Watt
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask D
Reference Voltage :	12 Vdc

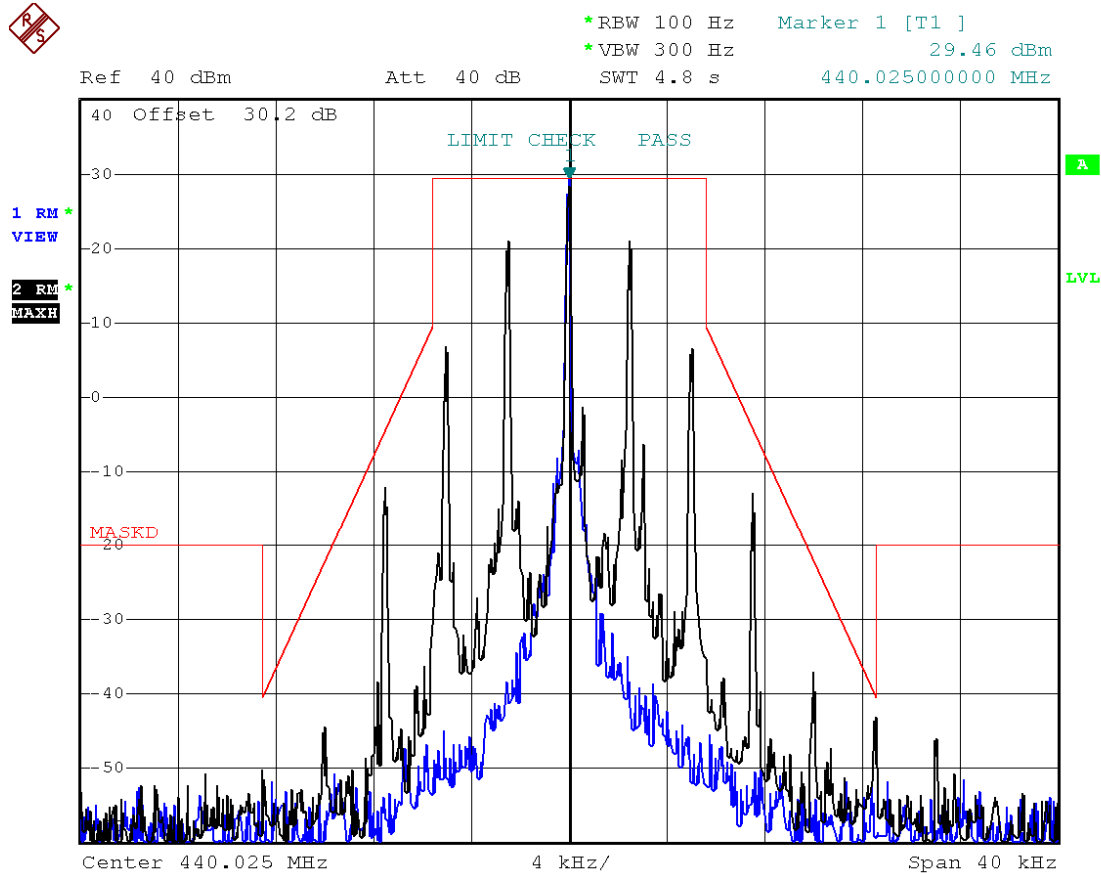

Date: 18.AUG.2008 20:00:55


6.2.3 Low Channel / Low Power / F3E / Wide Band

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	440.025 MHz
Channel :	Low Channel
Power Output :	1 Watt
Channel Spacing :	Wide Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask B
Reference Voltage :	12 Vdc



SD-125E


*RBW 300 Hz Marker 1 [T1]
*VBW 1 kHz 29.14 dBm
Ref 40 dBm *Att 40 dB SWT 1.4 s 440.02500000 MHz

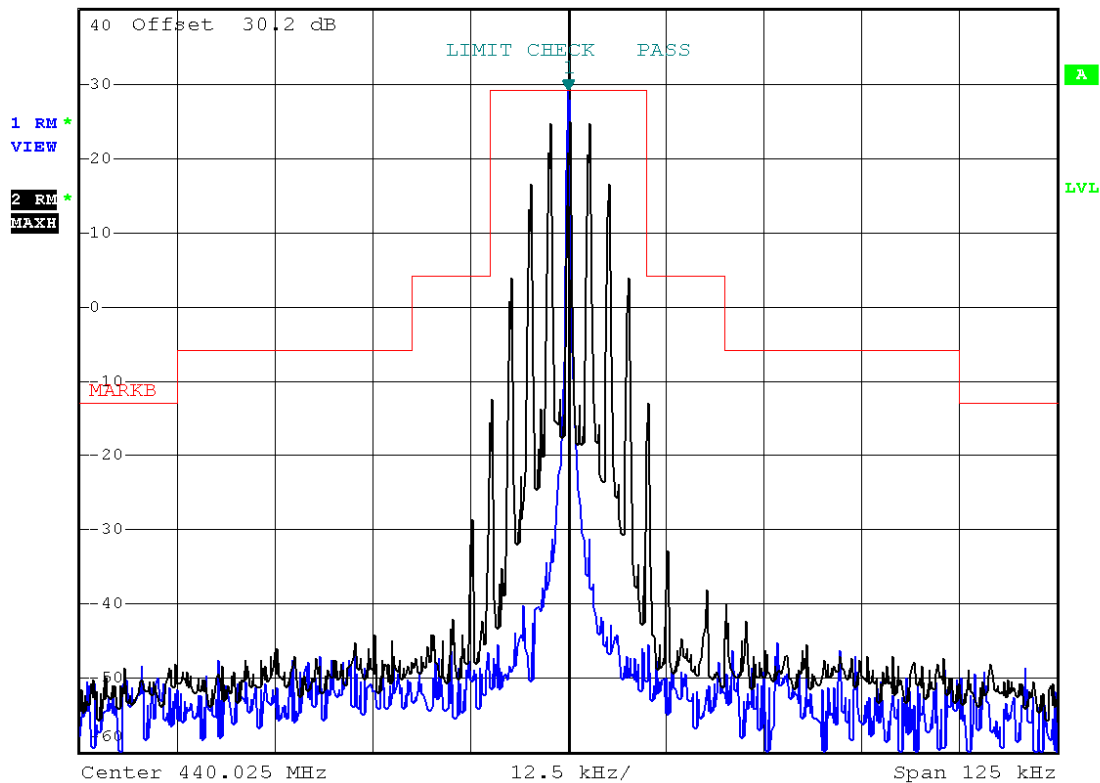

Date: 9.AUG.2008 18:42:27

6.2.4 Low Channel / High Power / F1D


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	440.025 MHz
Channel :	Low Channel
Power Output :	5 Watt
Channel Spacing :	Narrow Band
Modulation Signal :	9600 bps
Emission Mask :	Mask D
Reference Voltage :	12 Vdc

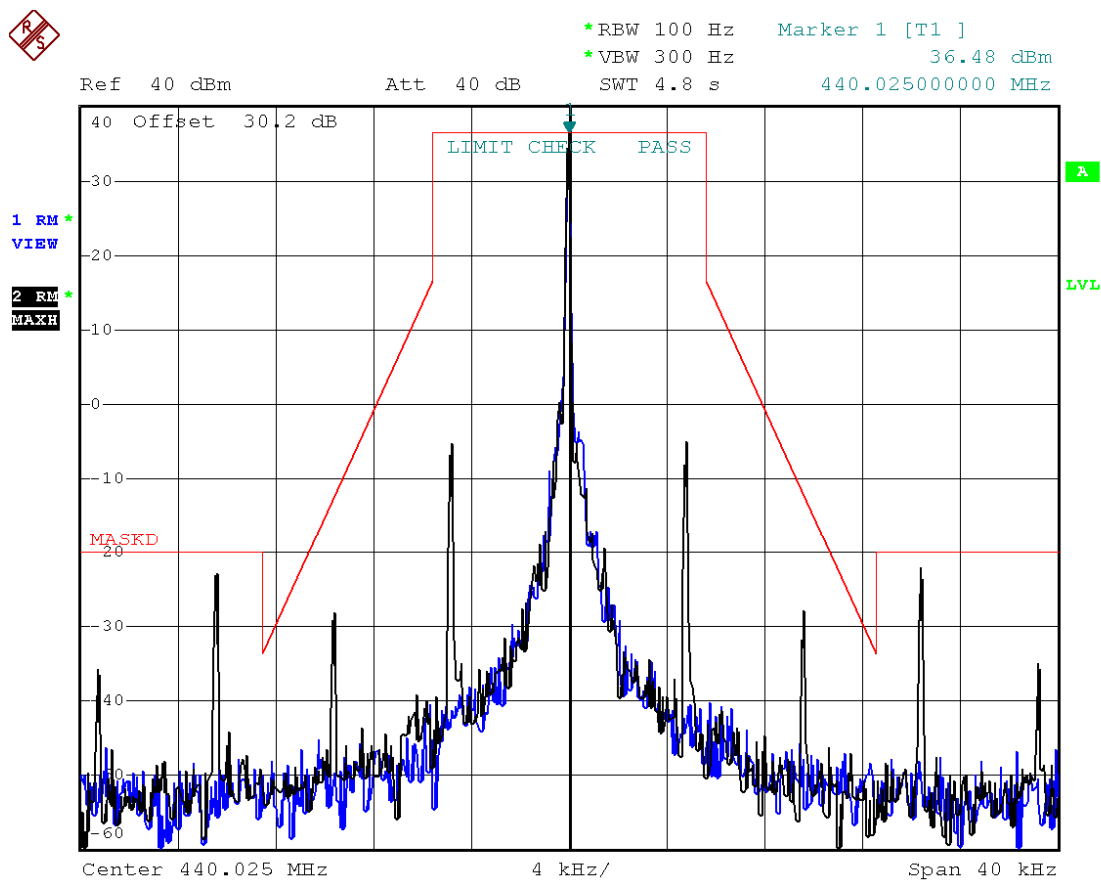

Date: 18.AUG.2008 20:03:58

6.2.5 Low Channel / high Power / F3E / Narrow Band


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	440.025 MHz
Channel :	Low Channel
Power Output :	5 Watt
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask D
Reference Voltage :	12 Vdc

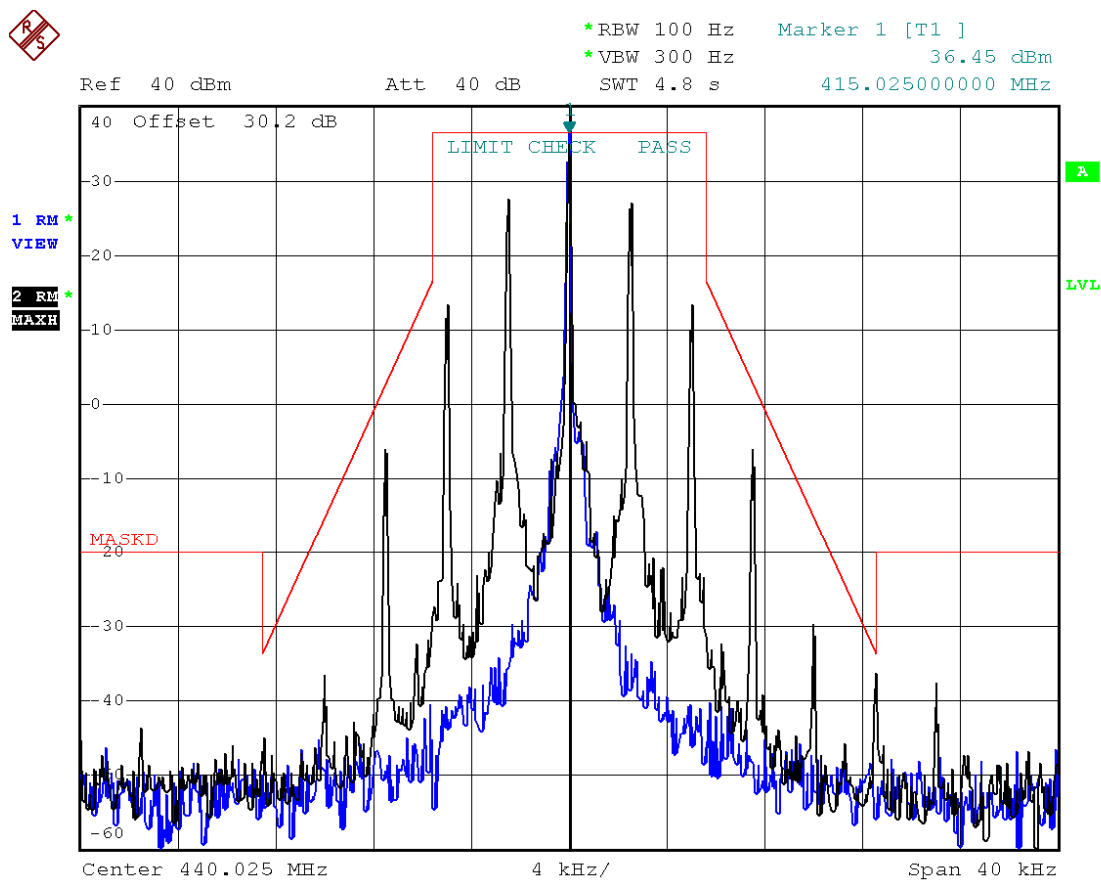

Date: 18.AUG.2008 20:04:28

6.2.6 Low Channel / High Power / F3E / Wide Band


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	440.025 MHz
Channel :	Low Channel
Power Output :	5 Watt
Channel Spacing :	Wide Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask B
Reference Voltage :	12 Vdc

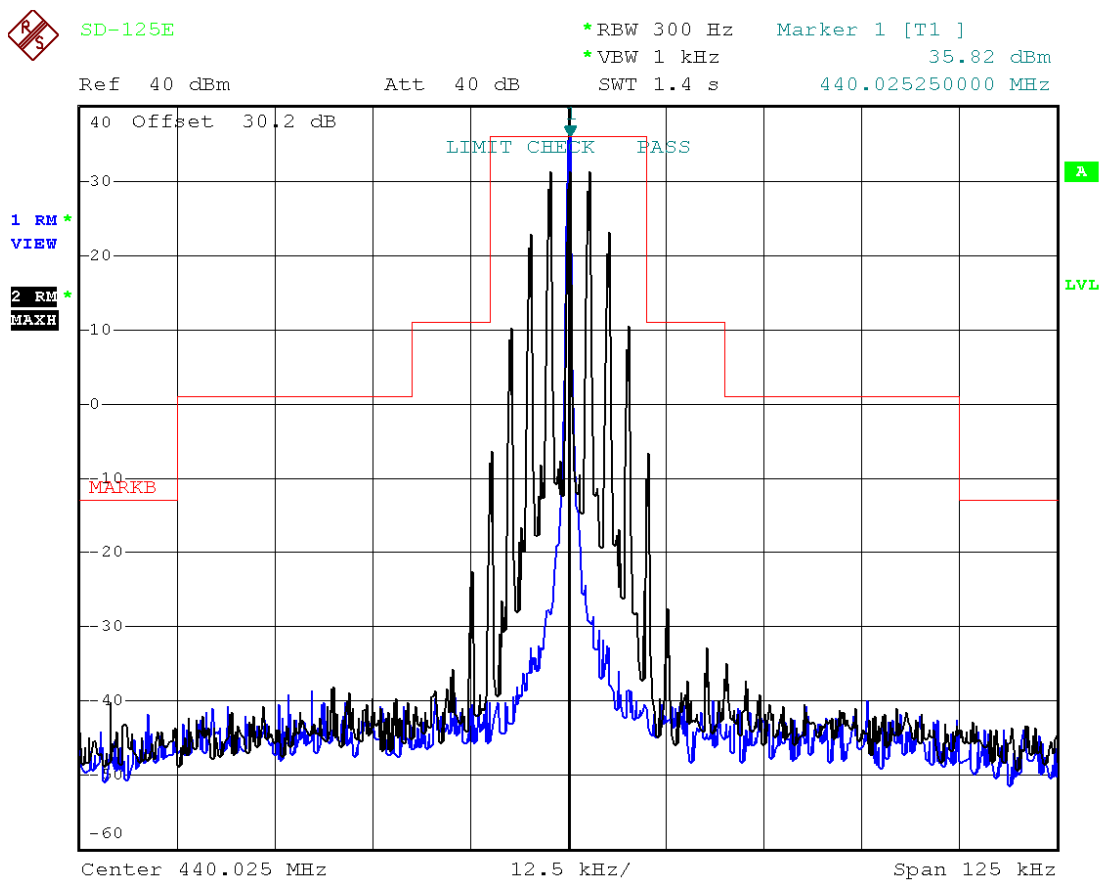

Date: 9.AUG.2008 18:44:27

6.2.7 Middle Channel / Low Power / F1D


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	455.025 MHz
Channel :	Middle Channel
Power Output :	1 Watt
Channel Spacing :	Narrow Band
Modulation Signal :	9600 bps
Emission Mask :	Mask D
Reference Voltage :	12 Vdc

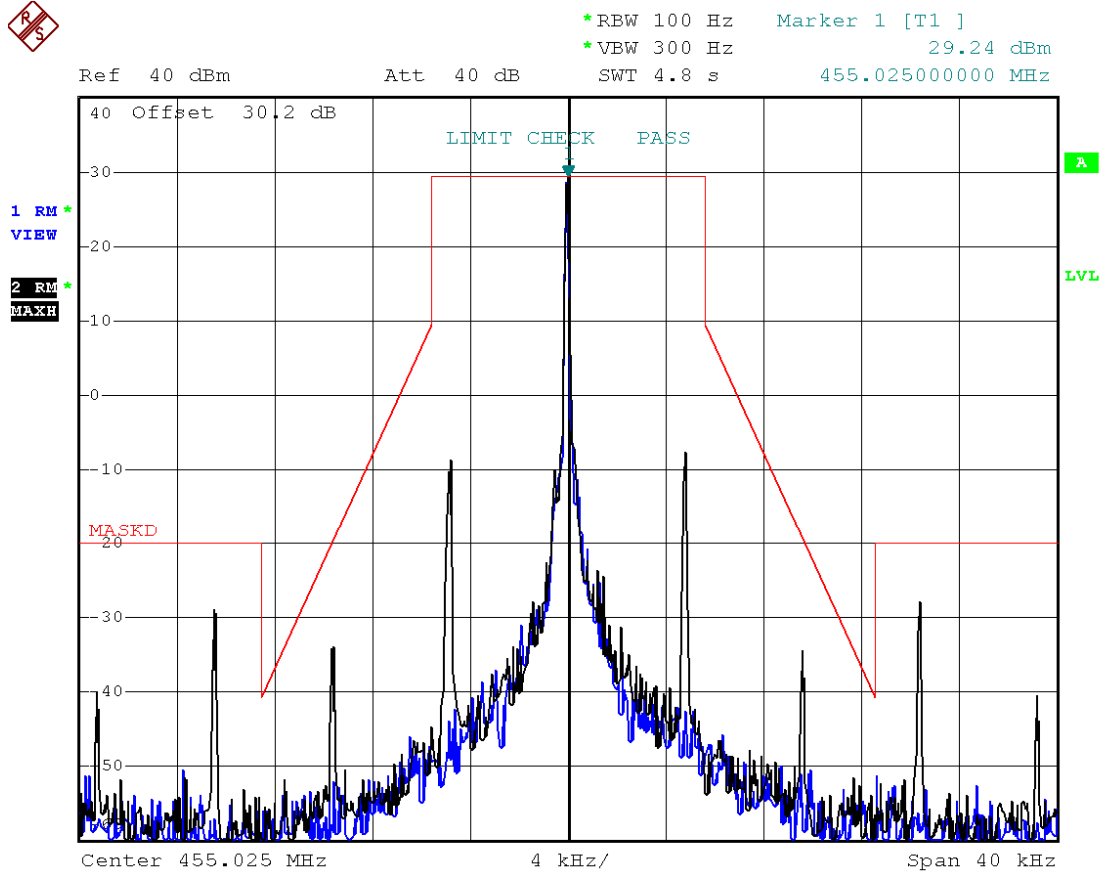

Date: 18.AUG.2008 19:56:08

6.2.8 Middle Channel / Low Power / F3E / Narrow Band


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	455.025 MHz
Channel :	Middle Channel
Power Output :	1 Watt
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask D
Reference Voltage :	12 Vdc

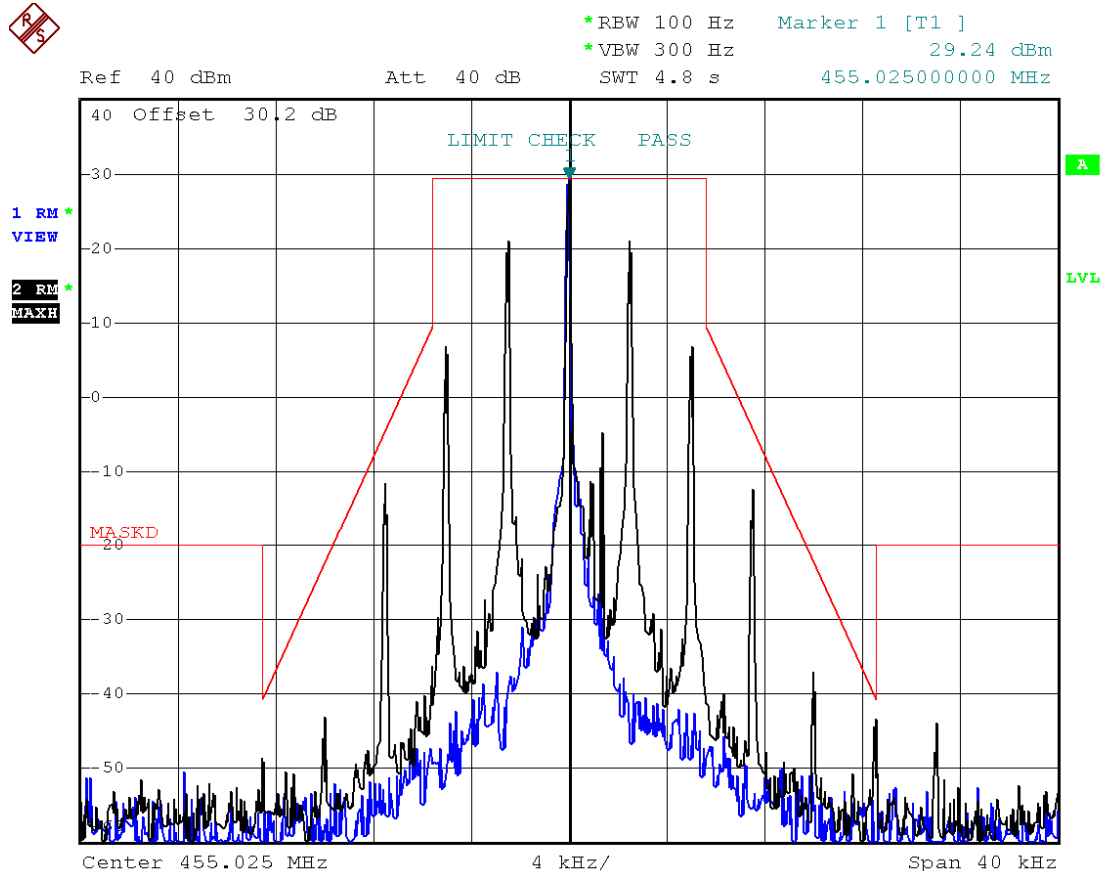

Date: 18.AUG.2008 19:56:50

6.2.9 Middle Channel / Low Power / F3E / Wide Band


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	455.025 MHz
Channel :	Middle Channel
Power Output :	1 Watt
Channel Spacing :	Wide Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask B
Reference Voltage :	12 Vdc

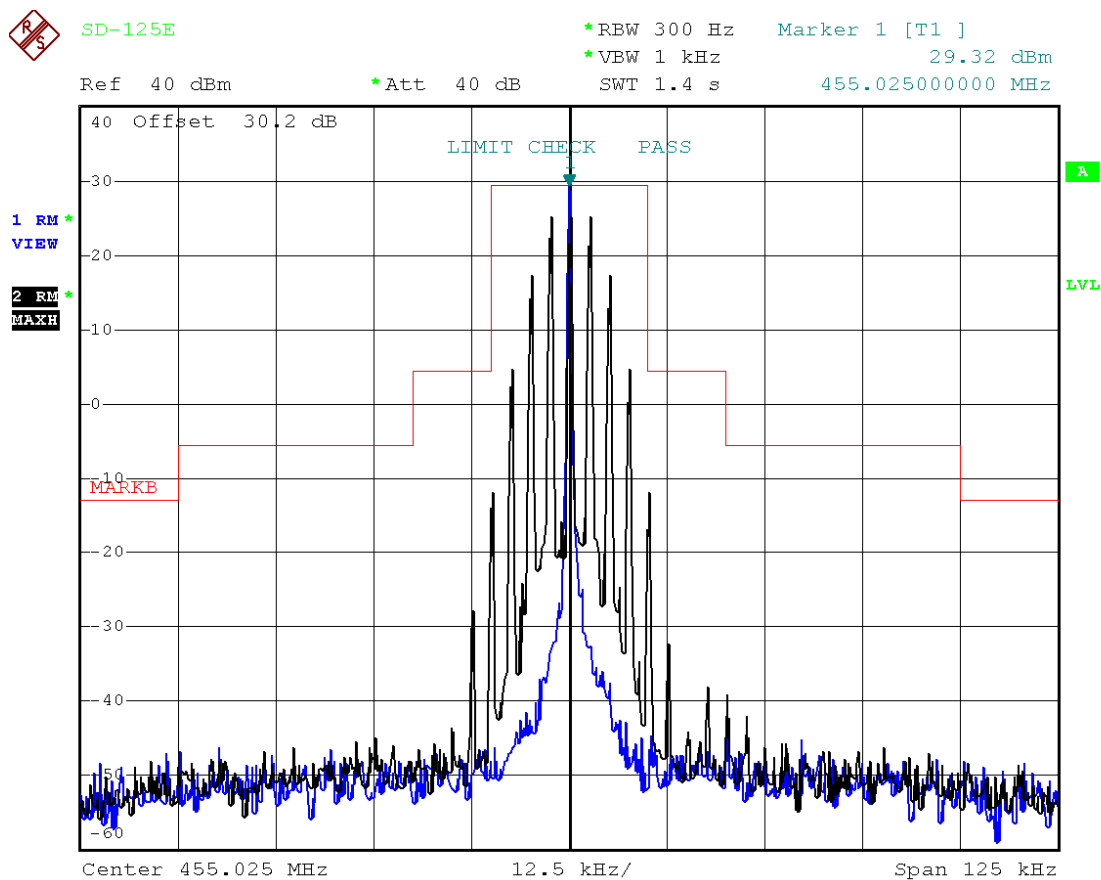

Date: 9.AUG.2008 18:38:27

6.2.10 Middle Channel / High Power / F1D


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	455.025 MHz
Channel :	Middle Channel
Power Output :	5 Watt
Channel Spacing :	Narrow Band
Modulation Signal :	9600 bps
Emission Mask :	Mask D
Reference Voltage :	12 Vdc

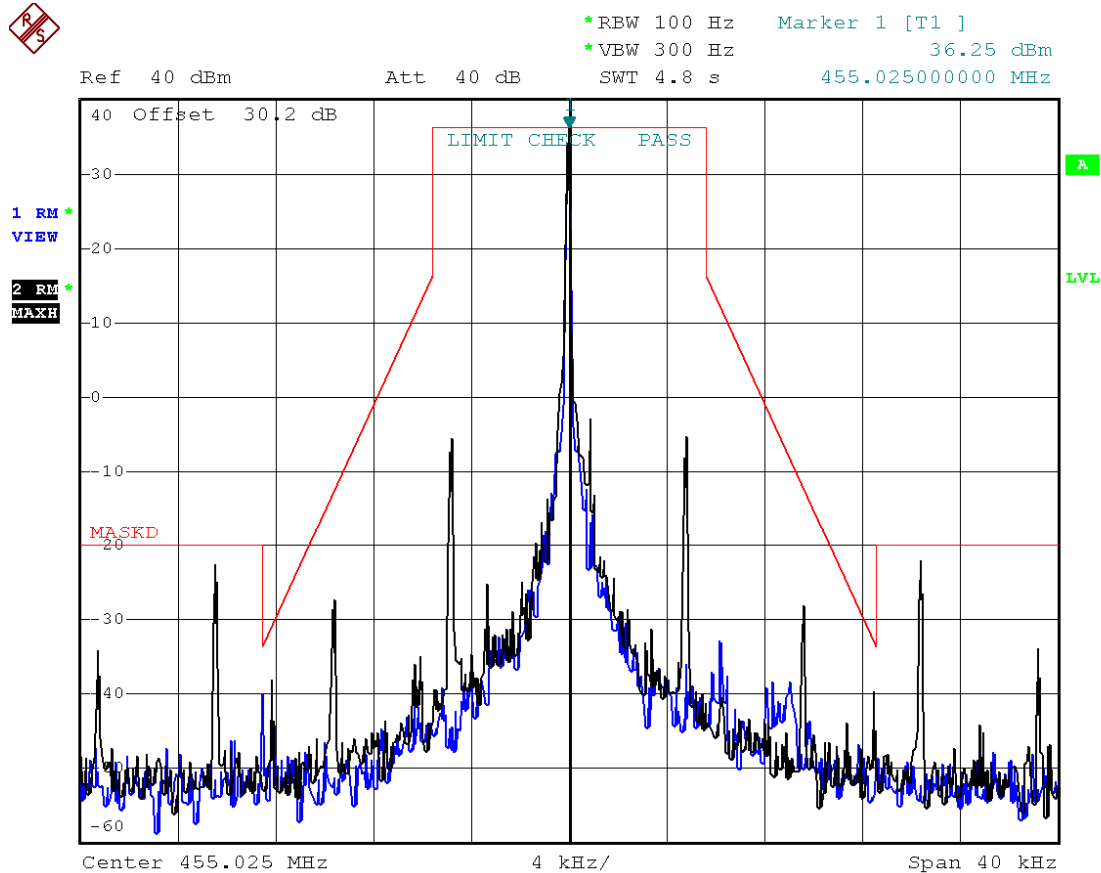

Date: 18.AUG.2008 19:52:17

6.2.11 Middle Channel / high Power / F3E / Narrow Band

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	455.025 MHz
Channel :	Middle Channel
Power Output :	5 Watt
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask D
Reference Voltage :	12 Vdc

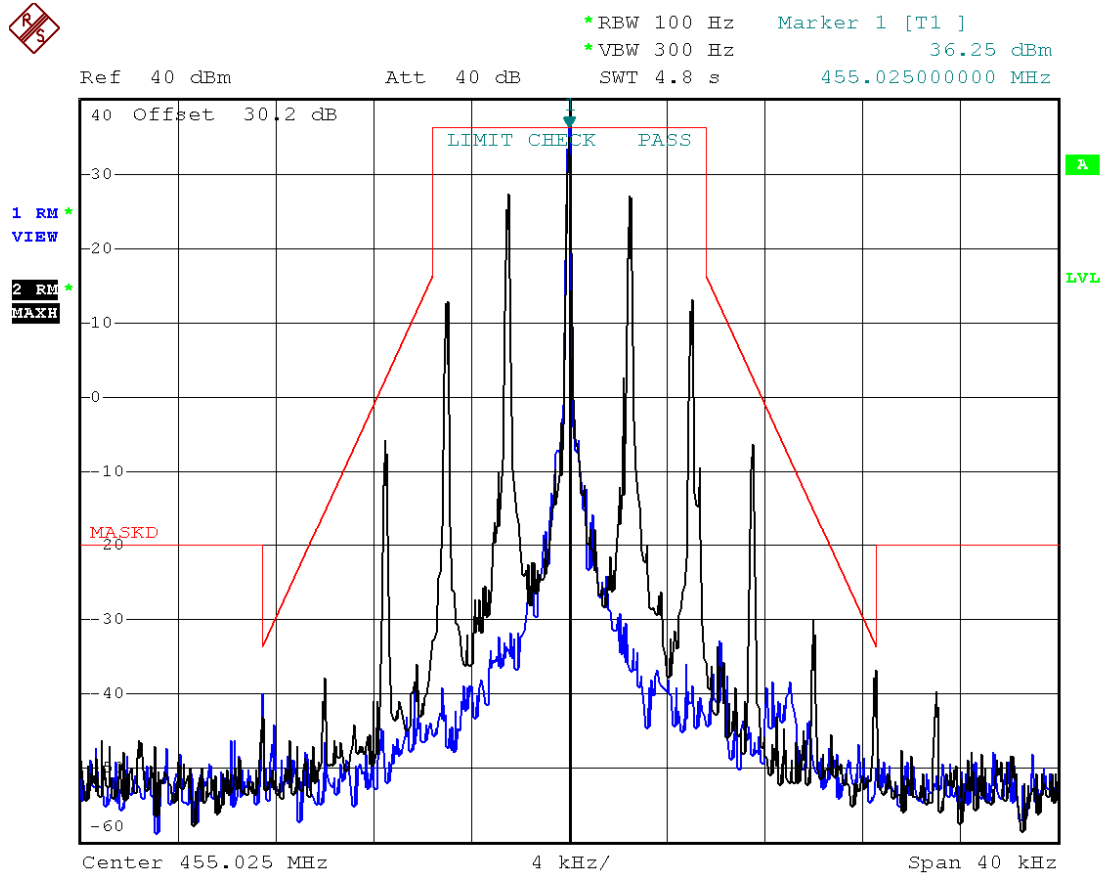

Date: 18.AUG.2008 19:52:48


6.2.12 Middle Channel / High Power / F3E / Wide Band

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	455.025 MHz
Channel :	Middle Channel
Power Output :	5 Watt
Channel Spacing :	Wide Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask B
Reference Voltage :	12 Vdc



SD-125E


*RBW 300 Hz Marker 1 [T1]
*VBW 1 kHz 35.56 dBm
Ref 40 dBm Att 40 dB SWT 1.4 s 455.02500000 MHz

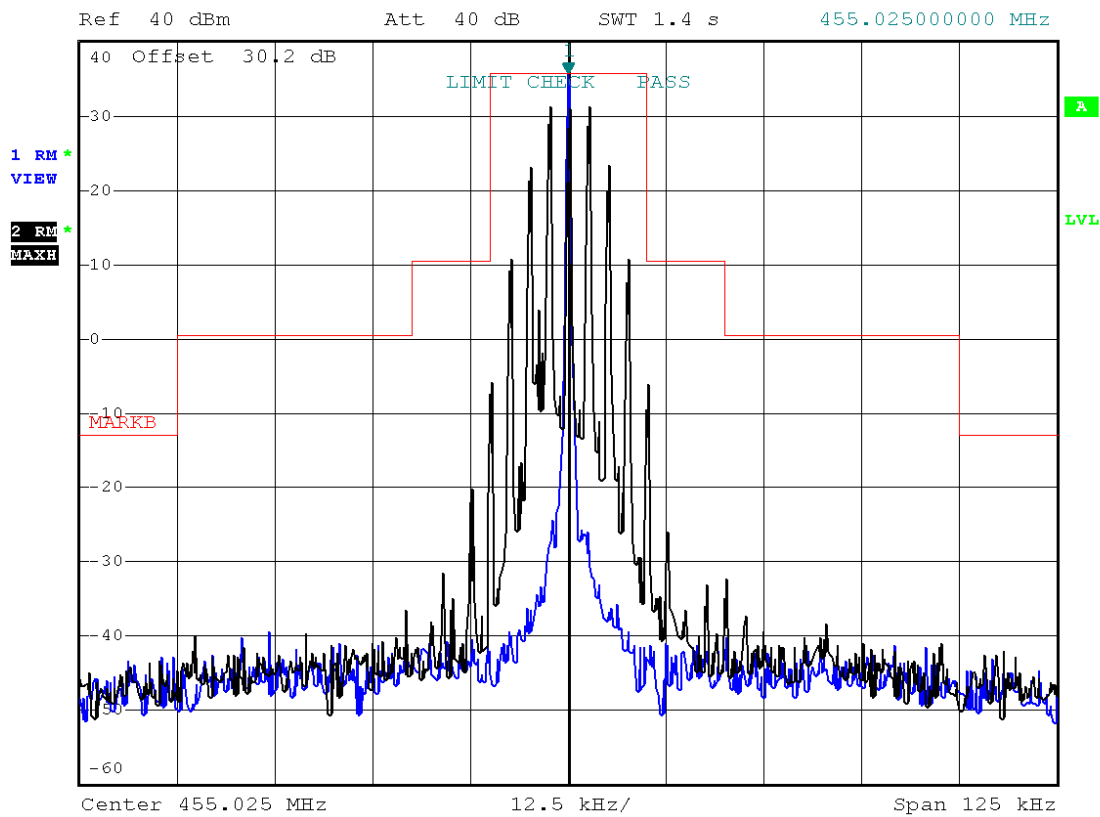

Date: 9.AUG.2008 18:35:20

6.2.13 High Channel / Low Power / F1D


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	469.975 MHz
Channel :	High Channel
Power Output :	1 Watt
Channel Spacing :	Narrow Band
Modulation Signal :	9600 bps
Emission Mask :	Mask D
Reference Voltage :	12 Vdc

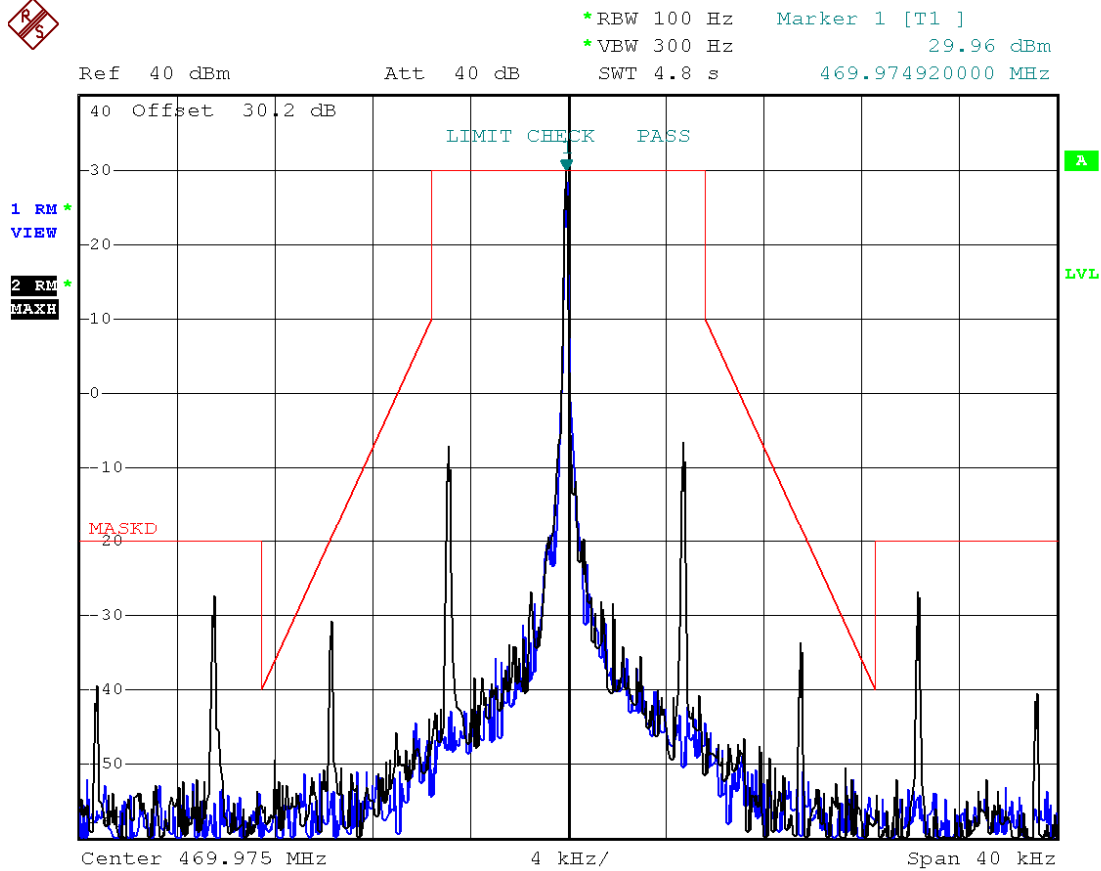

Date: 18.AUG.2008 19:43:19

6.2.14 High Channel / Low Power / F3E / Narrow Band


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	469.975 MHz
Channel :	High Channel
Power Output :	1 Watt
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask D
Reference Voltage :	12 Vdc

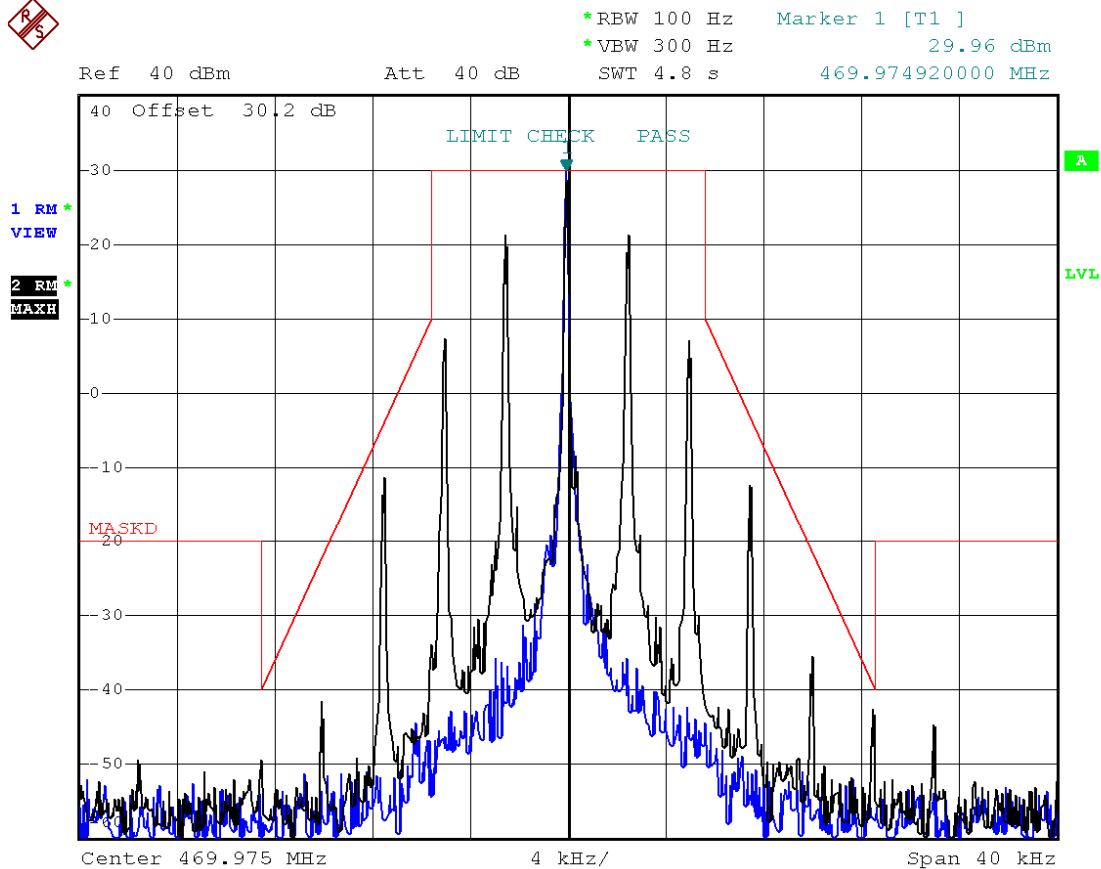

Date: 18.AUG.2008 19:43:54

6.2.15 High Channel / Low Power / F3E / Wide Band


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	469.975 MHz
Channel :	High Channel
Power Output :	1 Watt
Channel Spacing :	Wide Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask B
Reference Voltage :	12 Vdc

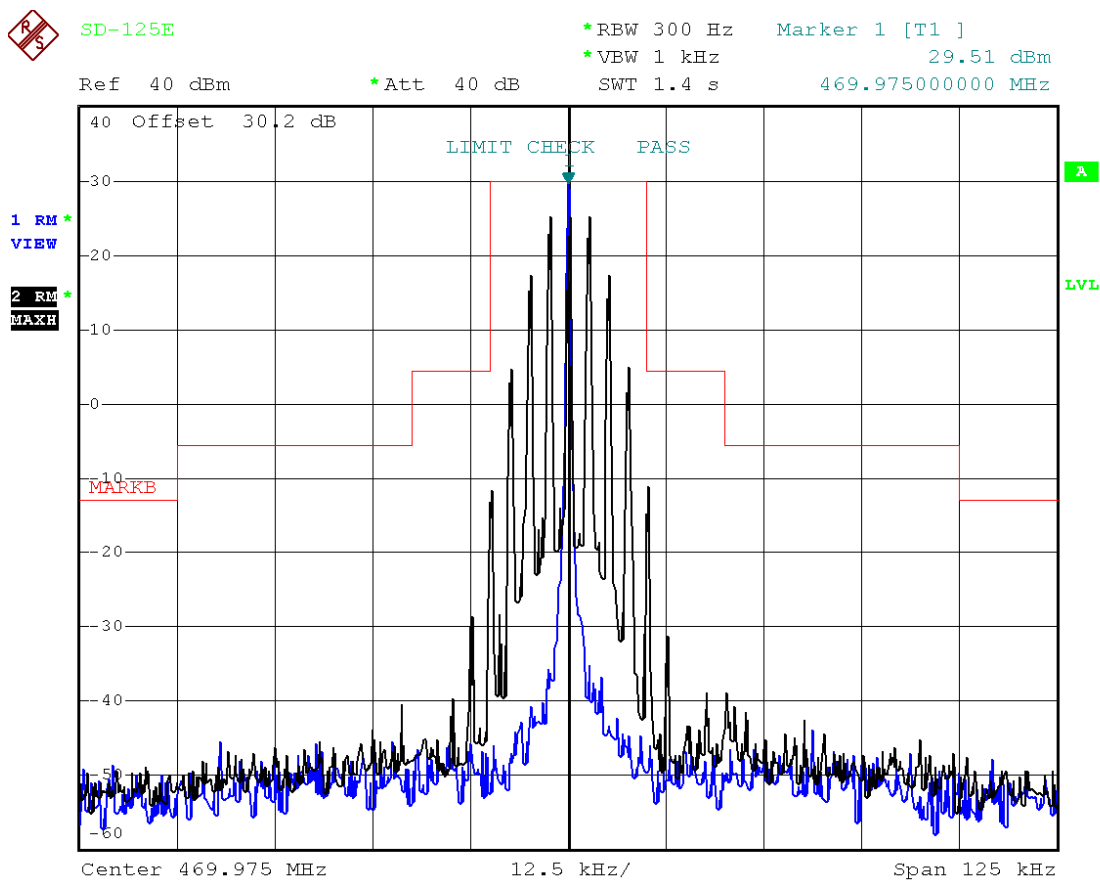

Date: 9.AUG.2008 18:29:07

6.2.16 High Channel / High Power / F1D


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	469.975 MHz
Channel :	High Channel
Power Output :	5 Watt
Channel Spacing :	Narrow Band
Modulation Signal :	9600 bps
Emission Mask :	Mask D
Reference Voltage :	12 Vdc

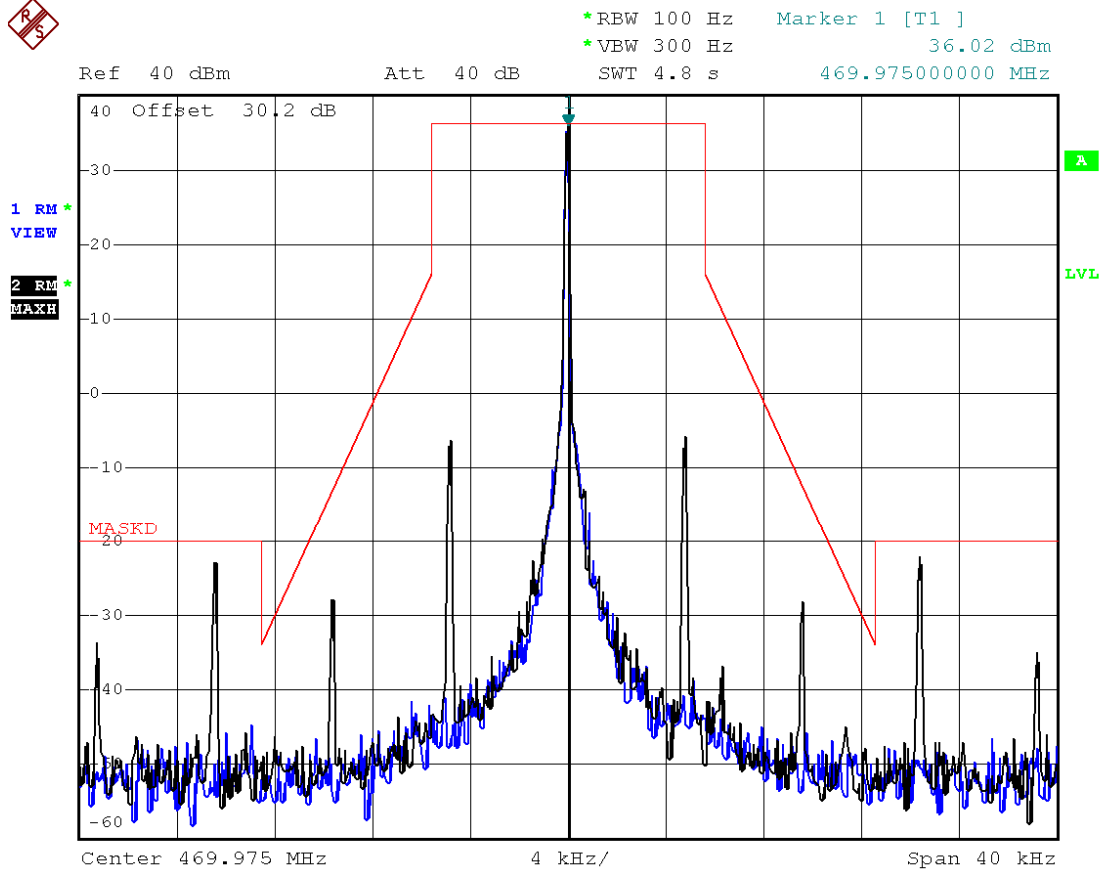

Date: 18.AUG.2008 19:47:03

6.2.17 High Channel / high Power / F3E / Narrow Band


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	469.975 MHz
Channel :	High Channel
Power Output :	5 Watt
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask D
Reference Voltage :	12 Vdc

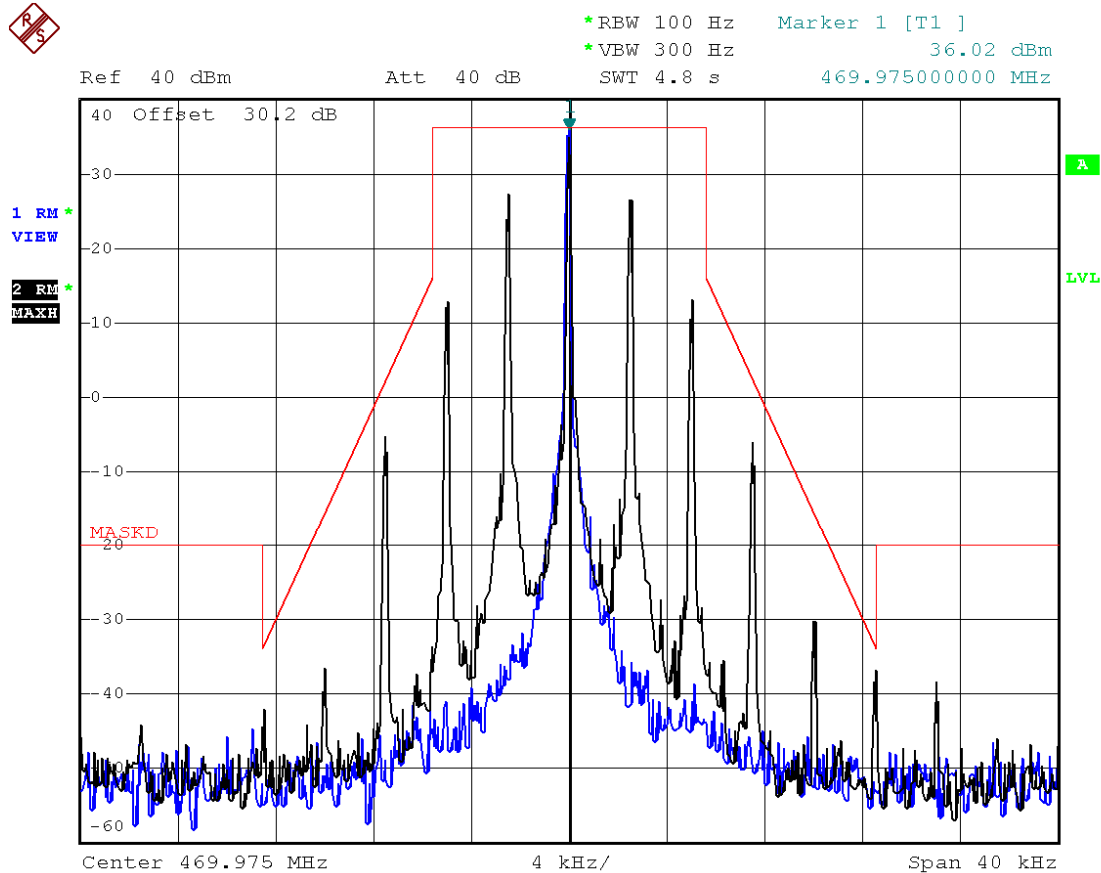

Date: 18.AUG.2008 19:47:34

6.2.18 High Channel / High Power / F3E / Wide Band

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 5.5
Operating Frequency :	469.975 MHz
Channel :	High Channel
Power Output :	5 Watt
Channel Spacing :	Wide Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask B
Reference Voltage :	12 Vdc

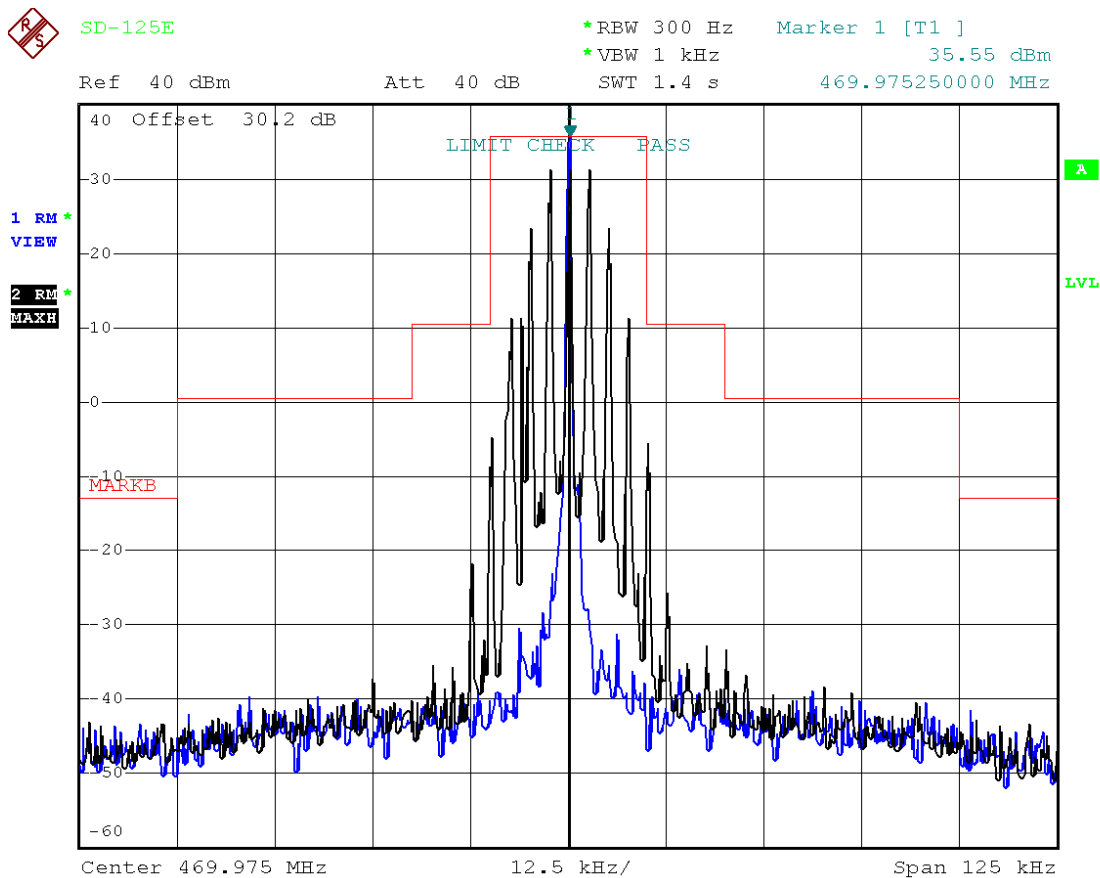


Date: 9.AUG.2008 18:31:22

6.3 Spurious Emissions at Antenna Terminals

6.3.1 Low Channel / High Power / Narrow Band / TX

FCC Rules :	Part 2 §2.1051 & §90.210
IC Rules :	RSS-119 Section 5.8
Operating Frequency :	440.025 MHz
Channel :	Low Channel
Power Output :	5 Watts
Channel Spacing :	Narrow Band
Reference Voltage :	12 Vdc
Limit :	50 + 10log ₁₀ P (-20dBm)

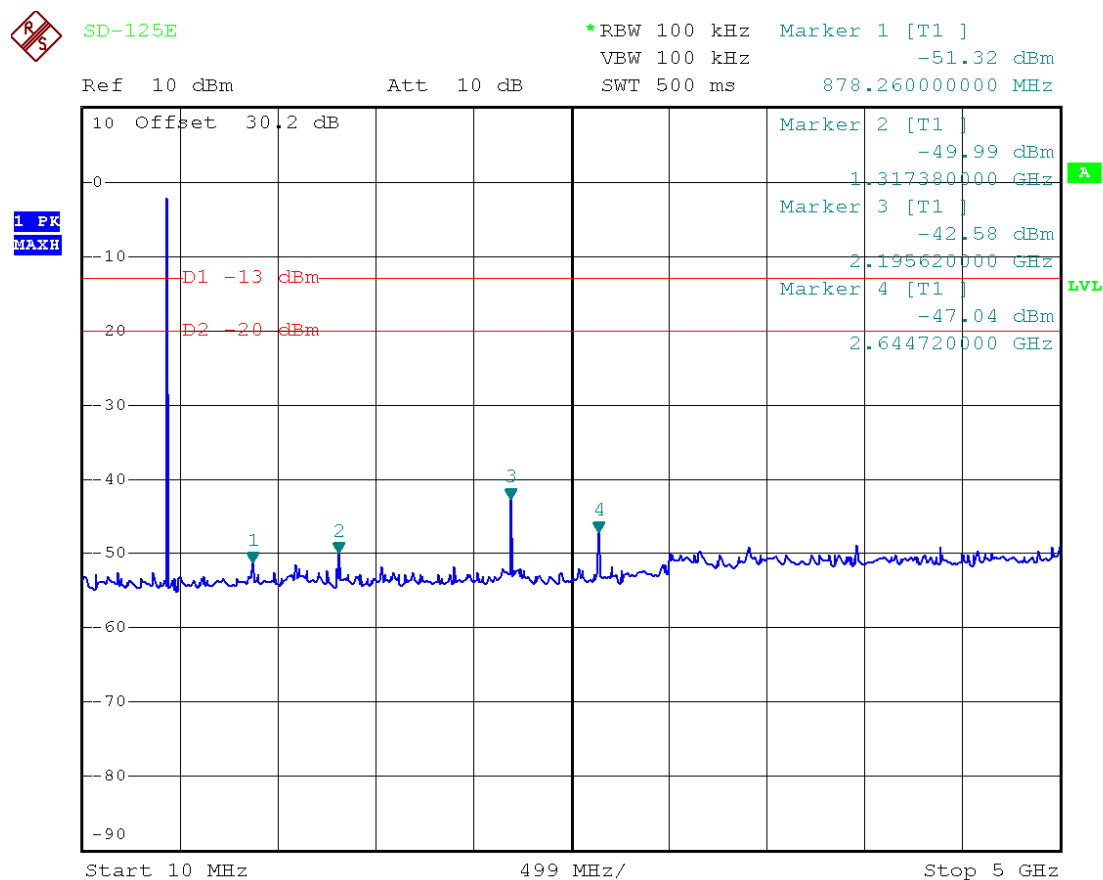

Date: 8.AUG.2008 00:02:12

6.3.2 Middle Channel / High Power / Narrow Band / TX

FCC Rules :	Part 2 §2.1051 & §90.210
IC Rules :	RSS-119 Section 5.8
Operating Frequency :	455.025 MHz
Channel :	Middle Channel
Power Output :	5 Watts
Channel Spacing :	Narrow Band
Reference Voltage :	12 Vdc
Limit :	50 + 10log ₁₀ P (-20dBm)




SD-125E

*RBW 100 kHz Marker 1 [T1]
VBW 100 kHz -43.40 dBm
SWT 500 ms 1.367280000 GHz

Ref 10 dBm

Att 10 dB

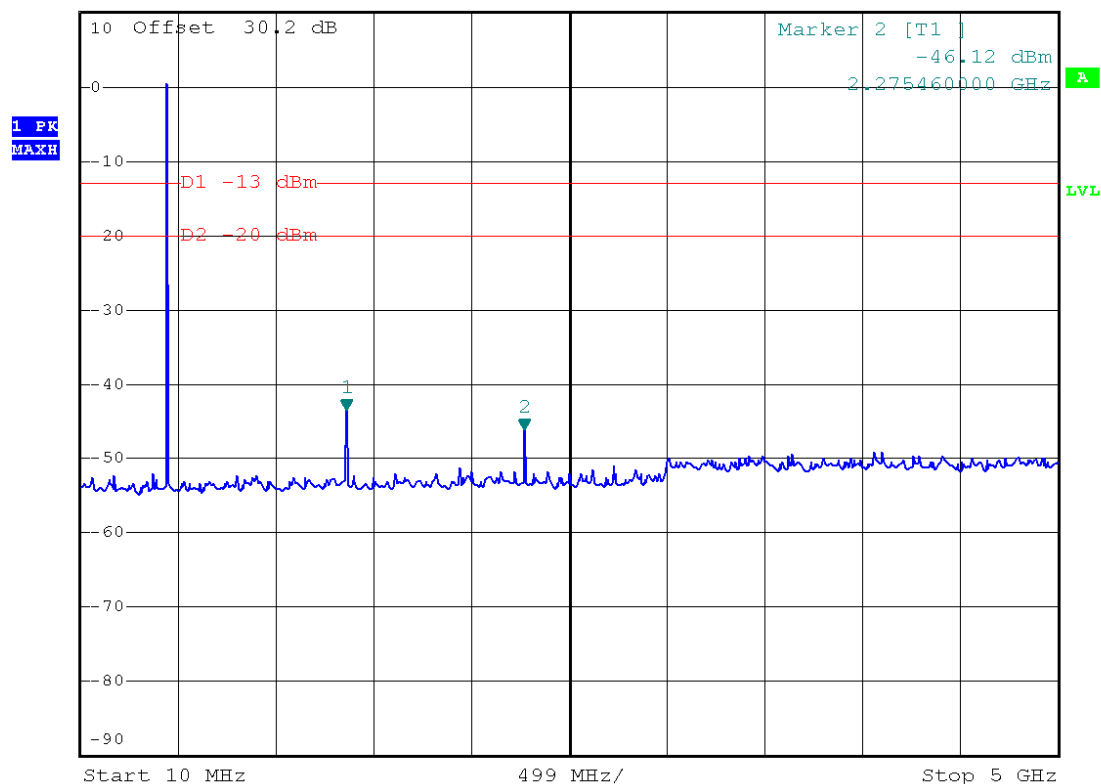

Date: 8.AUG.2008 00:03:48

6.3.3 High Channel / High Power / Narrow Band / TX

FCC Rules :	Part 2 §2.1051 & §90.210
IC Rules :	RSS-119 Section 5.8
Operating Frequency :	469.975 MHz
Channel :	High Channel
Power Output :	5 Watts
Channel Spacing :	Narrow Band
Reference Voltage :	12 Vdc
Limit :	50 + 10log ₁₀ P (-20dBm)




SD-125E

*RBW 100 kHz Marker 1 [T1]
VBW 100 kHz -43.61 dBm
SWT 500 ms 1.407200000 GHz

Ref 10 dBm

Att 10 dB

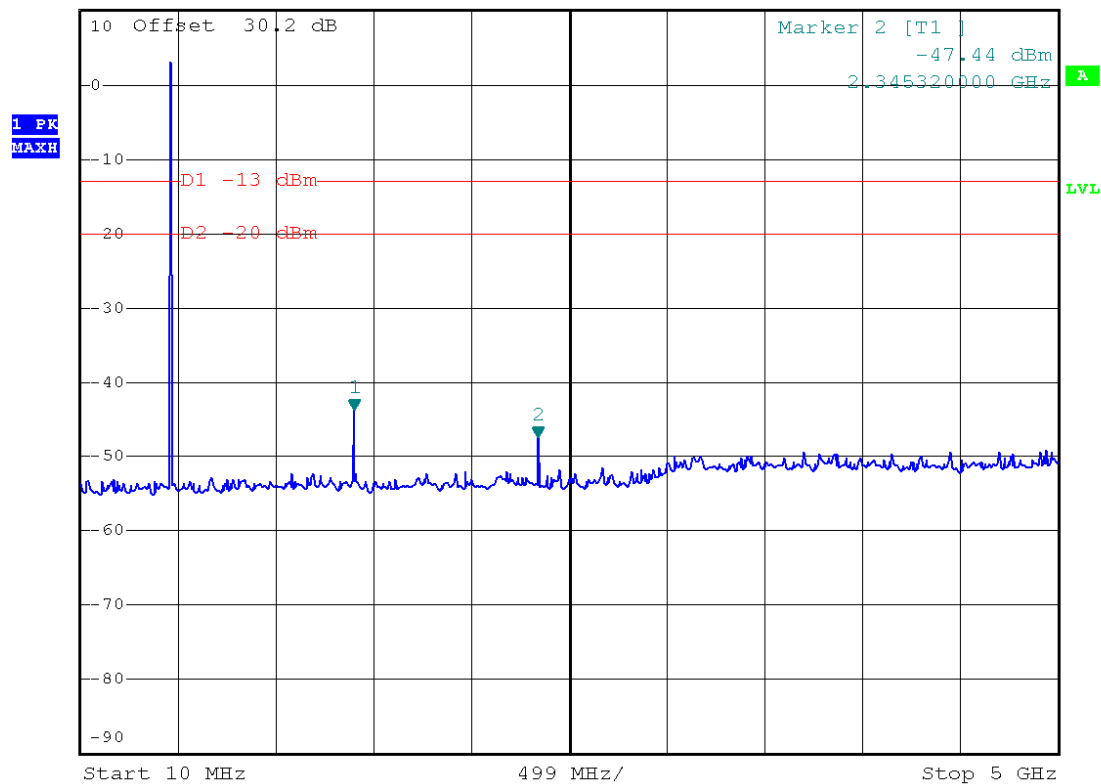

Date: 8.AUG.2008 00:04:54

6.3.4 Low Channel / Narrow Band / RX

FCC Rules :	Part 2 §2.1051 & §90.210
IC Rules :	RSS-119 Section 5.8
Operating Frequency :	440.025 MHz
Channel :	Low Channel
Power Output :	Stand-By
Channel Spacing :	Narrow Band
Reference Voltage :	12 Vdc
Limit :	50 + 10log ₁₀ P (-20dBm)




SD-125E

*RBW 100 kHz Marker 1 [T1]
VBW 100 kHz -67.73 dBm
SWT 500 ms 389.240000000 MHz

Ref -20 dBm

Att 10 dB

1 PK
MAXH

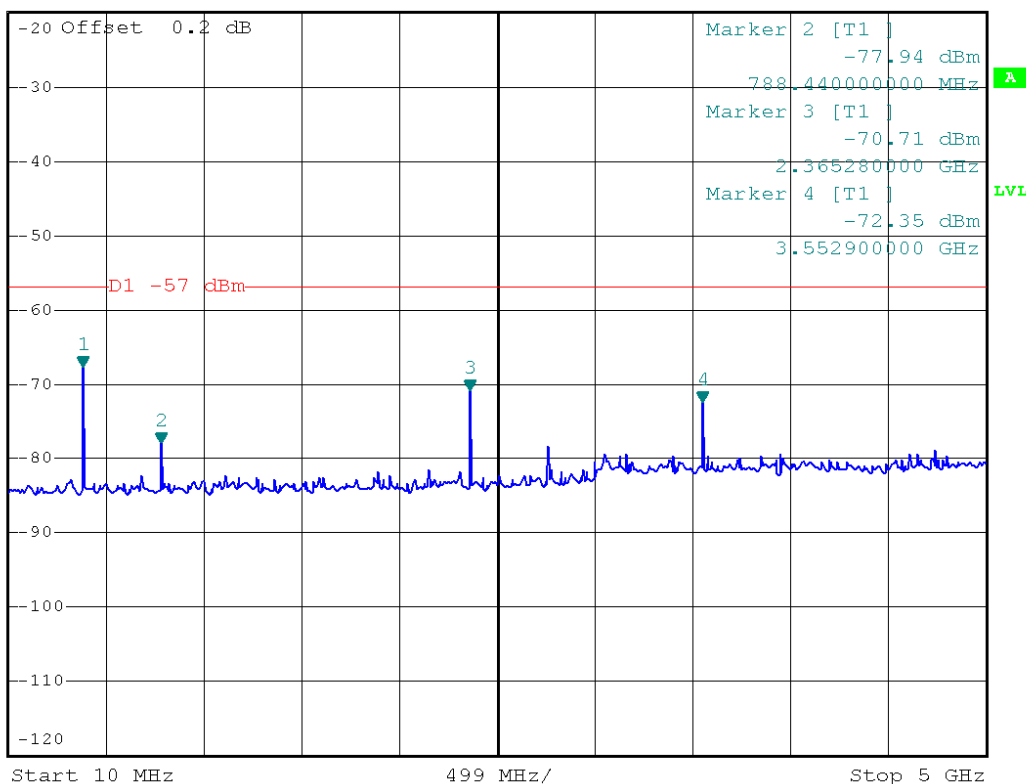

Date: 8.AUG.2008 01:40:13

6.3.5 Middle Channel / Narrow Band / RX

FCC Rules :	Part 2 §2.1051 & §90.210
IC Rules :	RSS-119 Section 5.8
Operating Frequency :	455.025 MHz
Channel :	Middle Channel
Power Output :	Stand-By
Channel Spacing :	Narrow Band
Reference Voltage :	12 Vdc
Limit :	50 + 10log ₁₀ P (-20dBm)




SD-125E

*RBW 100 kHz Marker 1 [T1]
VBW 100 kHz -63.59 dBm
SWT 500 ms 409.20000000 MHz

Ref -20 dBm

Att 10 dB

1 PK
MAXH

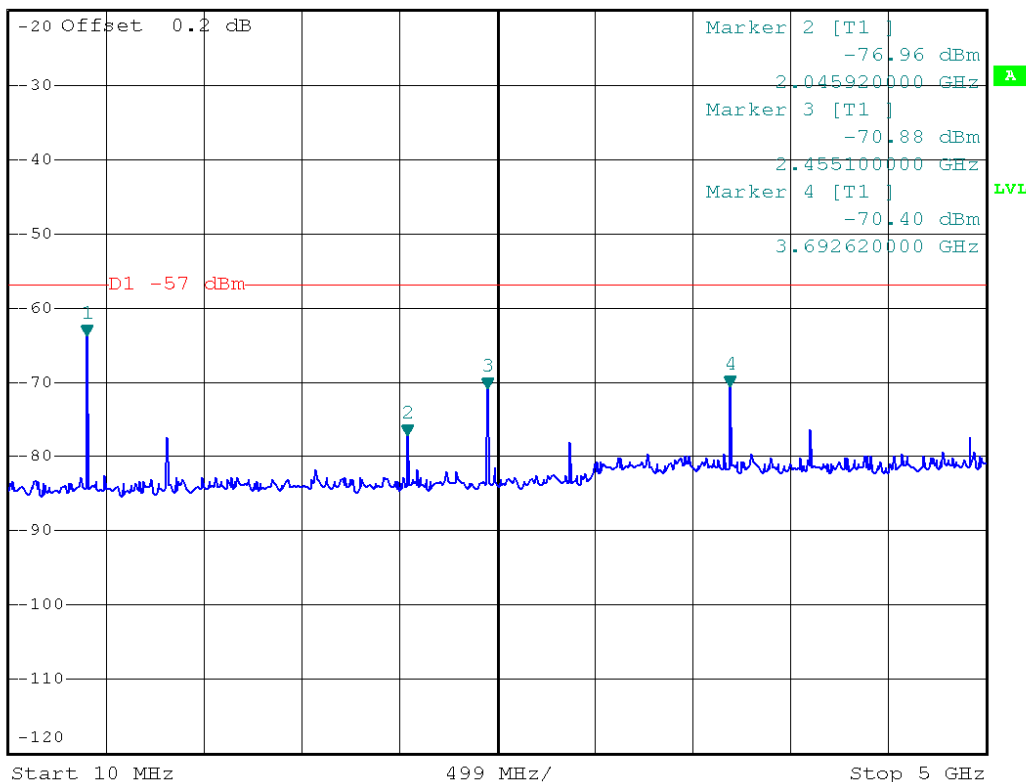

Date: 8.AUG.2008 01:40:59

6.3.6 High Channel / Narrow Band / RX

FCC Rules :	Part 2 §2.1051 & §90.210
IC Rules :	RSS-119 Section 5.8
Operating Frequency :	469.975 MHz
Channel :	High Channel
Power Output :	Stand-By
Channel Spacing :	Narrow Band
Reference Voltage :	12 Vdc
Limit :	50 + 10log ₁₀ P (-20dBm)




SD-125E

*RBW 100 kHz Marker 1 [T1]
VBW 100 kHz -60.00 dBm
SWT 500 ms 419.180000000 MHz

Ref -20 dBm

Att 10 dB

1 PK
MAXH

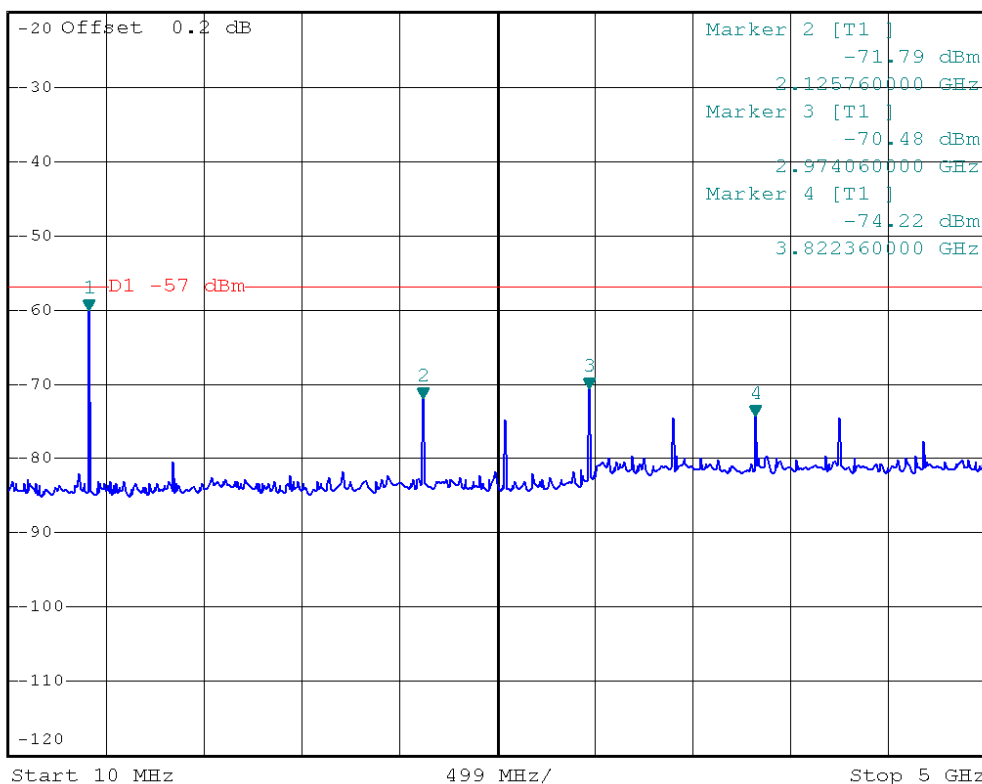


Date: 8.AUG.2008 01:41:47

6.4 Frequency Stability / Temperature Variation

6.4.1 Middle Channel / High Power / Non-Modulation

FCC Rules :	Part 2 §2.1055 & §90.231
IC Rules :	RSS-119 Section 5.3
Operating Frequency :	455.025 MHz
Channel :	Middle Channel
Power Output :	5 Watt
Limit :	2.5 ppm
Test Voltage :	12 Vdc
Test Temperature :	-30 °C

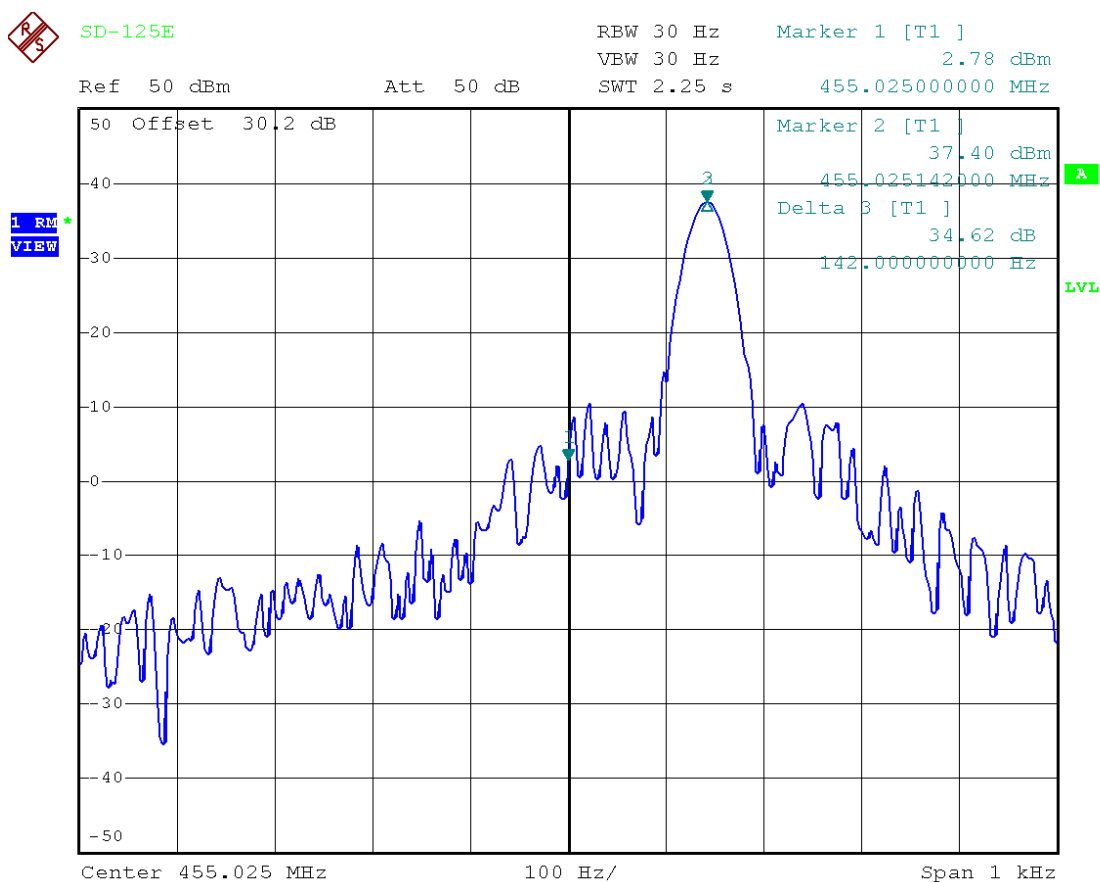

Date: 10.AUG.2008 19:00:18

6.4.2 Middle Channel / High Power / Non-Modulation

FCC Rules :	Part 2 §2.1055 & §90.231
IC Rules :	RSS-119 Section 5.3
Operating Frequency :	415.025 MHz
Channel :	Middle Channel
Power Output :	5 Watt
Limit :	2.5 ppm
Test Voltage :	12 Vdc
Test Temperature :	-20 °C




SD-125E

RBW 30 Hz Marker 1 [T1]
VBW 30 Hz -4.55 dBm
SWT 2.25 s 455.02500000 MHz

Ref 50 dBm

Att 50 dB

1 RM
VIEW

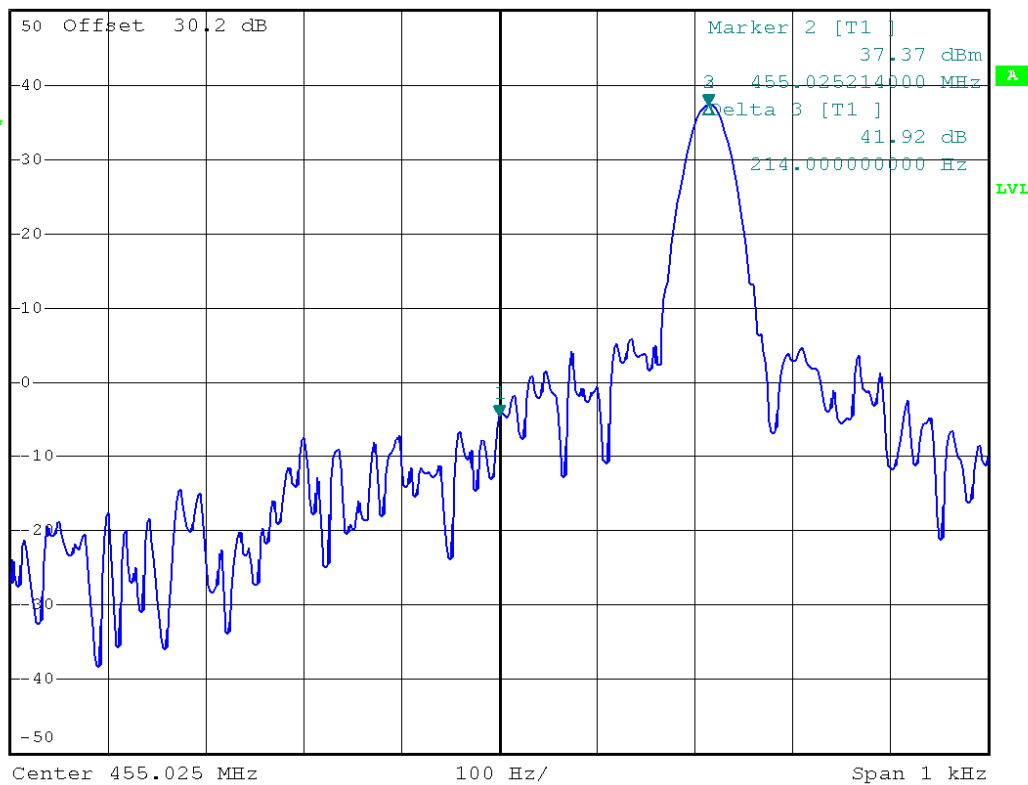

Date: 10.AUG.2008 19:32:29

6.4.3 Middle Channel / High Power / Non-Modulation

FCC Rules :	Part 2 §2.1055 & §90.231
IC Rules :	RSS-119 Section 5.3
Operating Frequency :	455.025 MHz
Channel :	Middle Channel
Power Output :	5 Watt
Limit :	2.5 ppm
Test Voltage :	12 Vdc
Test Temperature :	-10 °C




SD-125E

RBW 30 Hz Marker 1 [T1]
VBW 30 Hz 3.73 dBm
SWT 2.25 s 455.025000000 MHz

Ref 50 dBm

Att 50 dB

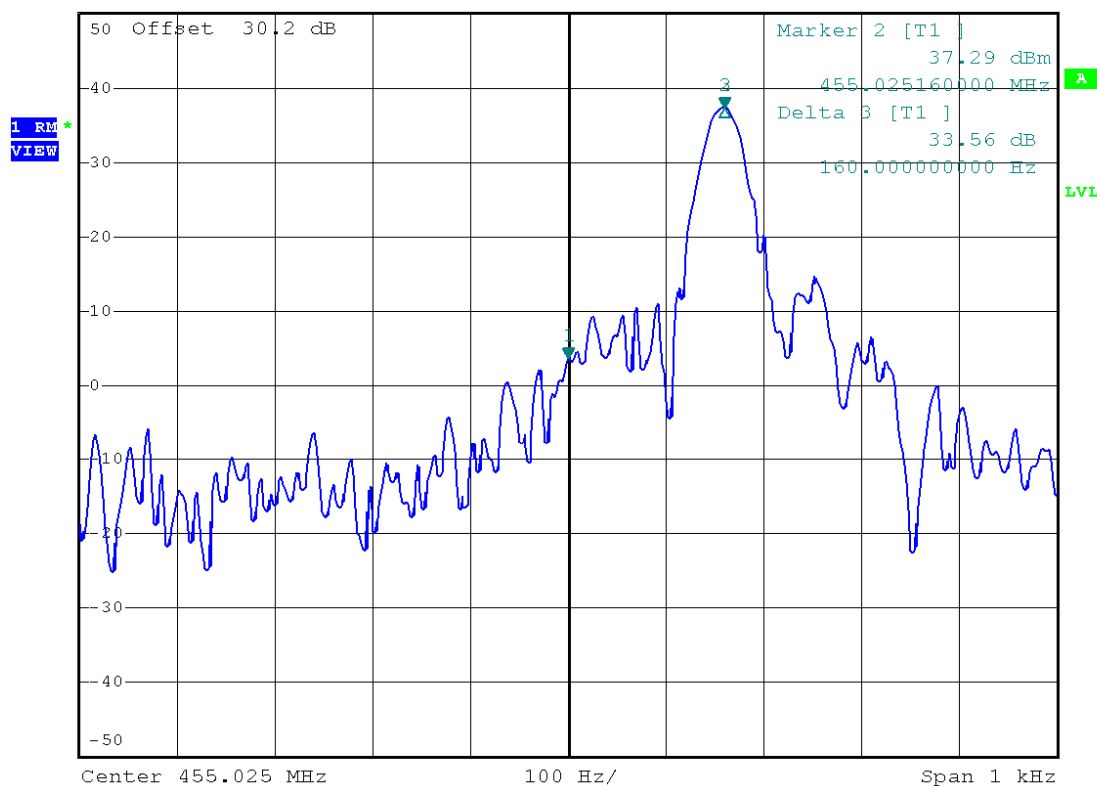

Date: 10.AUG.2008 19:54:29


6.4.4 Middle Channel / High Power / Non-Modulation

FCC Rules :	Part 2 §2.1055 & §90.231
IC Rules :	RSS-119 Section 5.3
Operating Frequency :	455.025 MHz
Channel :	Middle Channel
Power Output :	5 Watt
Limit :	2.5 ppm
Test Voltage :	12 Vdc
Test Temperature :	0 °C



SD-125E

RBW 30 Hz Marker 1 [T1]
VBW 30 Hz 0.17 dBm
SWT 2.25 s 455.025000000 MHz

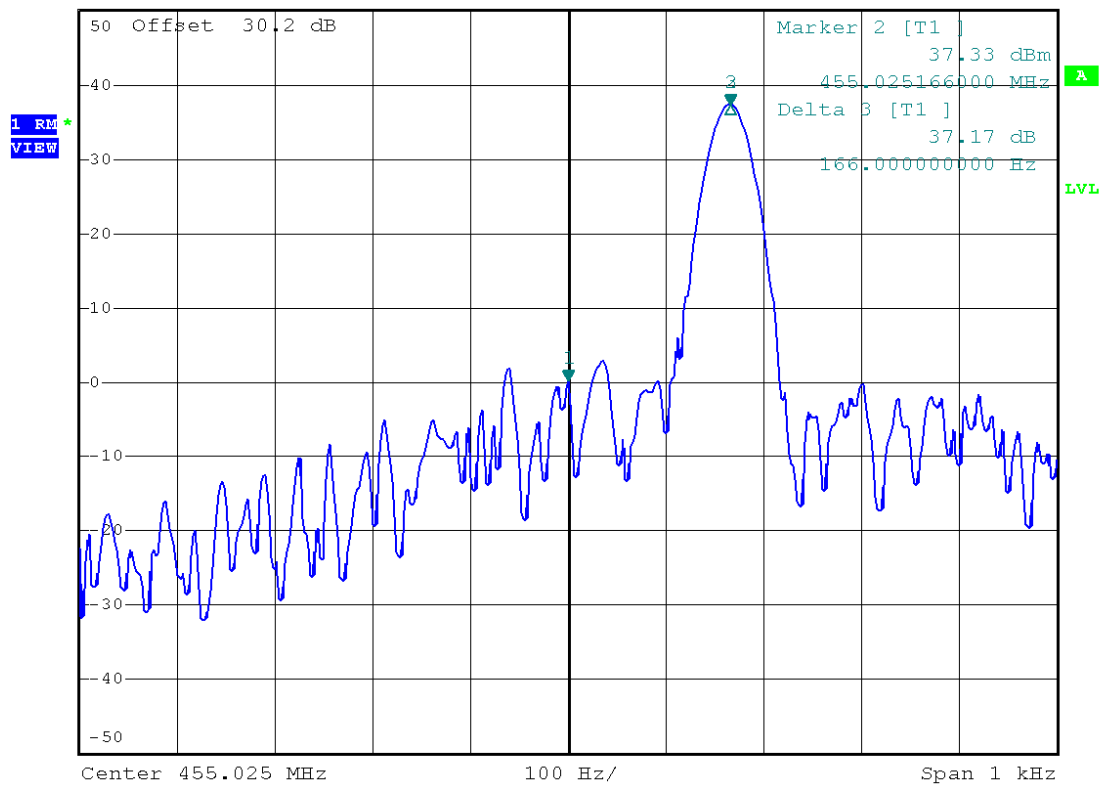

Date: 10.AUG.2008 20:11:23

6.4.5 Middle Channel / High Power / Non-Modulation

FCC Rules :	Part 2 §2.1055 & §90.231
IC Rules :	RSS-119 Section 5.3
Operating Frequency :	455.025 MHz
Channel :	Middle Channel
Power Output :	5 Watt
Limit :	2.5 ppm
Test Voltage :	12 Vdc
Test Temperature :	+10 °C




SD-125E

RBW 30 Hz Marker 1 [T1]
VBW 30 Hz -0.55 dBm
SWT 2.25 s 455.025000000 MHz

Ref 50 dBm

Att 50 dB

1 RM
VIEW

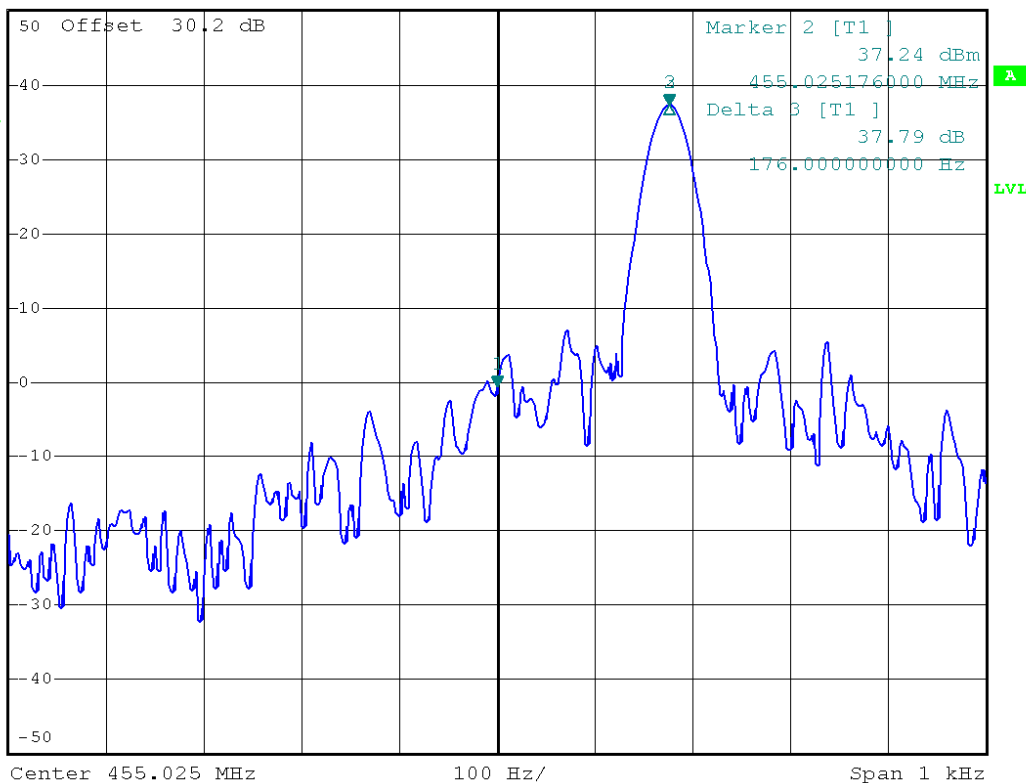

Date: 10.AUG.2008 21:14:36

6.4.6 Middle Channel / High Power / Non-Modulation

FCC Rules :	Part 2 §2.1055 & §90.231
IC Rules :	RSS-119 Section 5.3
Operating Frequency :	455.025 MHz
Channel :	Middle Channel
Power Output :	5 Watt
Limit :	2.5 ppm
Test Voltage :	12 Vdc
Test Temperature :	+20 °C




SD-125E

RBW 30 Hz Marker 1 [T1]
VBW 30 Hz -11.53 dBm
SWT 2.25 s 455.025000000 MHz

Ref 50 dBm

Att 50 dB

1 RM
VIEW

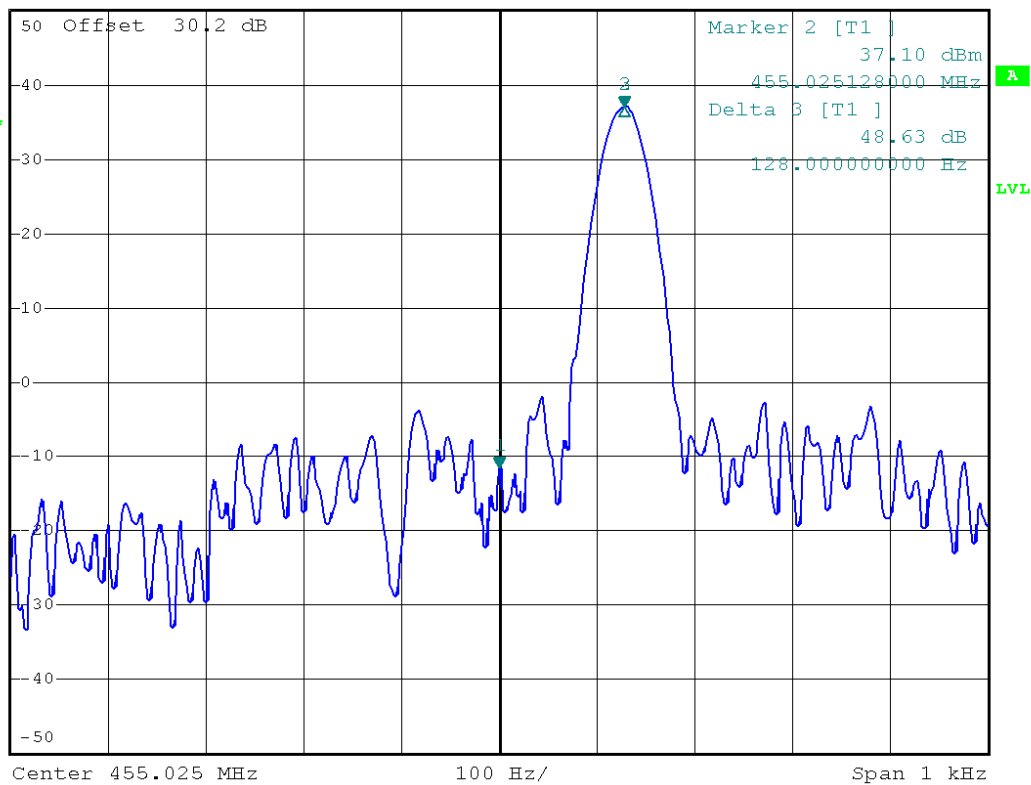

Date: 10.AUG.2008 22:24:42


6.4.7 Middle Channel / High Power / Non-Modulation

FCC Rules :	Part 2 §2.1055 & §90.231
IC Rules :	RSS-119 Section 5.3
Operating Frequency :	455.025 MHz
Channel :	Middle Channel
Power Output :	5 Watt
Limit :	2.5 ppm
Test Voltage :	12 Vdc
Test Temperature :	+30 °C



SD-125E

RBW 30 Hz Marker 1 [T1]
VBW 30 Hz -14.64 dBm
SWT 2.25 s 455.025000000 MHz

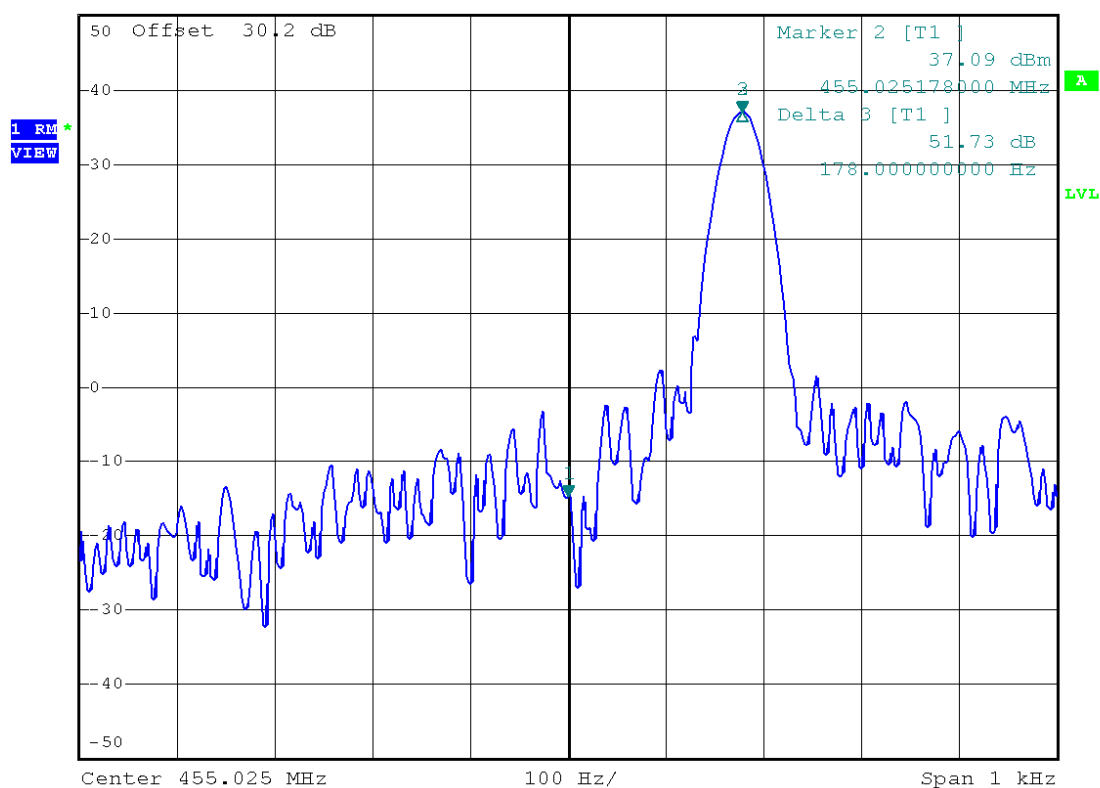


Date: 10.AUG.2008 22:54:57

6.4.8 Middle Channel / High Power / Non-Modulation

FCC Rules :	Part 2 §2.1055 & §90.231
IC Rules :	RSS-119 Section 5.3
Operating Frequency :	455.025 MHz
Channel :	Middle Channel
Power Output :	5 Watt
Limit :	2.5 ppm
Test Voltage :	12 Vdc
Test Temperature :	+40 °C



SD-125E

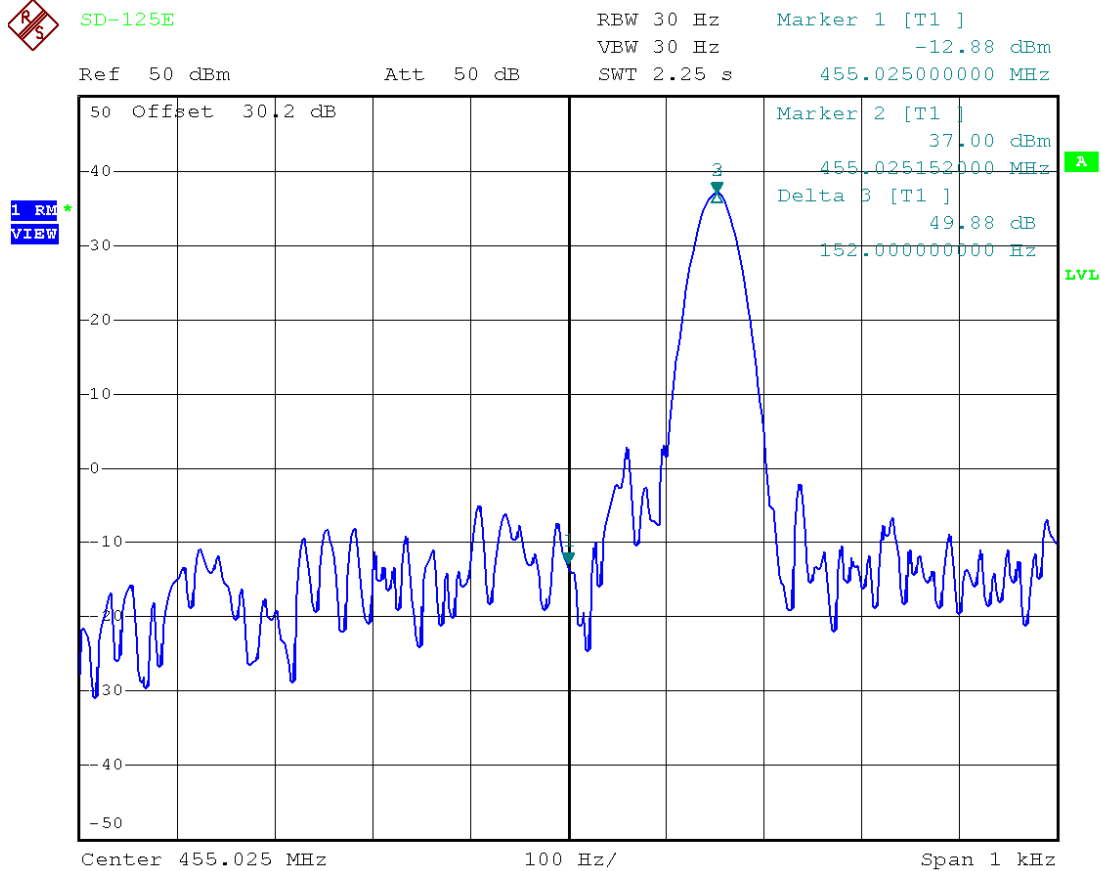

Date: 10.AUG.2008 23:19:21

6.4.9 Middle Channel / High Power / Non-Modulation

FCC Rules :	Part 2 §2.1055 & §90.231
IC Rules :	RSS-119 Section 5.3
Operating Frequency :	455.025 MHz
Channel :	Middle Channel
Power Output :	5 Watt
Limit :	2.5 ppm
Test Voltage :	12 Vdc
Test Temperature :	+50 °C




SD-125E

RBW 30 Hz Marker 1 [T1]
VBW 30 Hz -6.21 dBm
SWT 2.25 s 455.02500000 MHz

Ref 50 dBm

Att 50 dB

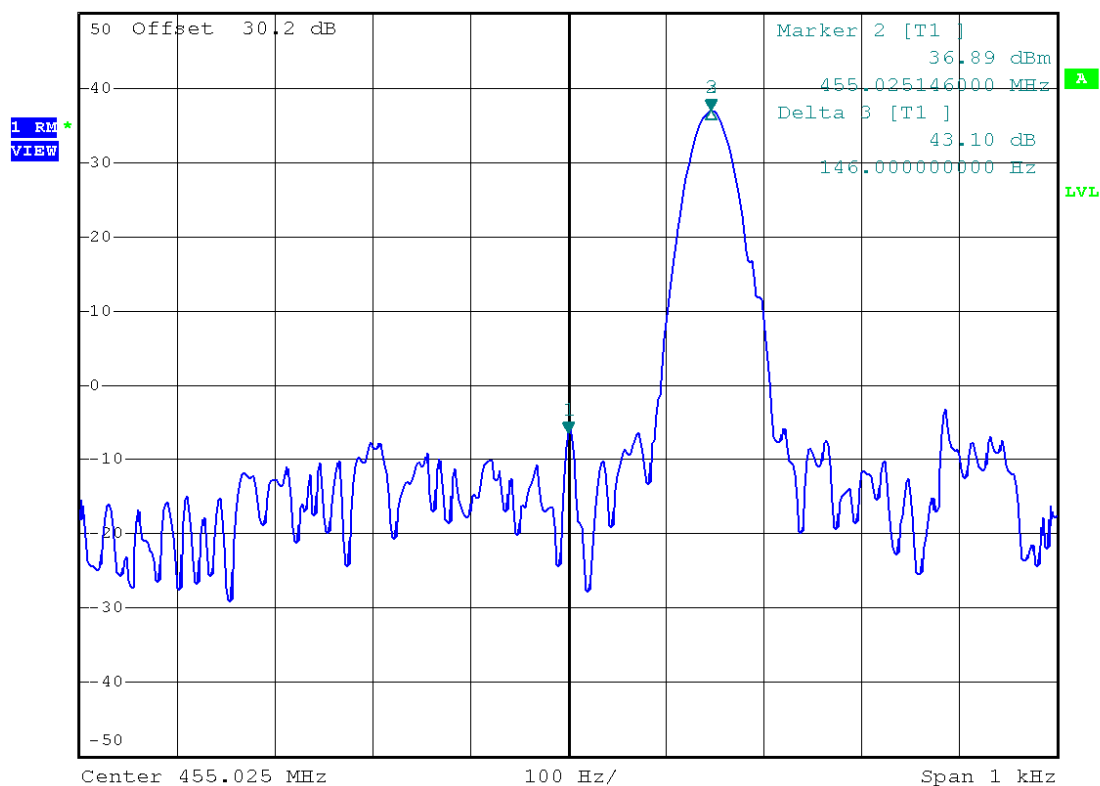

Date: 10.AUG.2008 23:41:59

6.4.10 Middle Channel / High Power / Non-Modulation

FCC Rules :	Part 2 §2.1055 & §90.231
IC Rules :	RSS-119 Section 5.3
Operating Frequency :	455.025 MHz
Channel :	Middle Channel
Power Output :	5 Watt
Limit :	2.5 ppm
Test Voltage :	12 Vdc
Test Temperature :	+60 °C




SD-125E

RBW 30 Hz Marker 1 [T1]
VBW 30 Hz -5.46 dBm
SWT 2.25 s 455.025000000 MHz

Ref 50 dBm

Att 50 dB

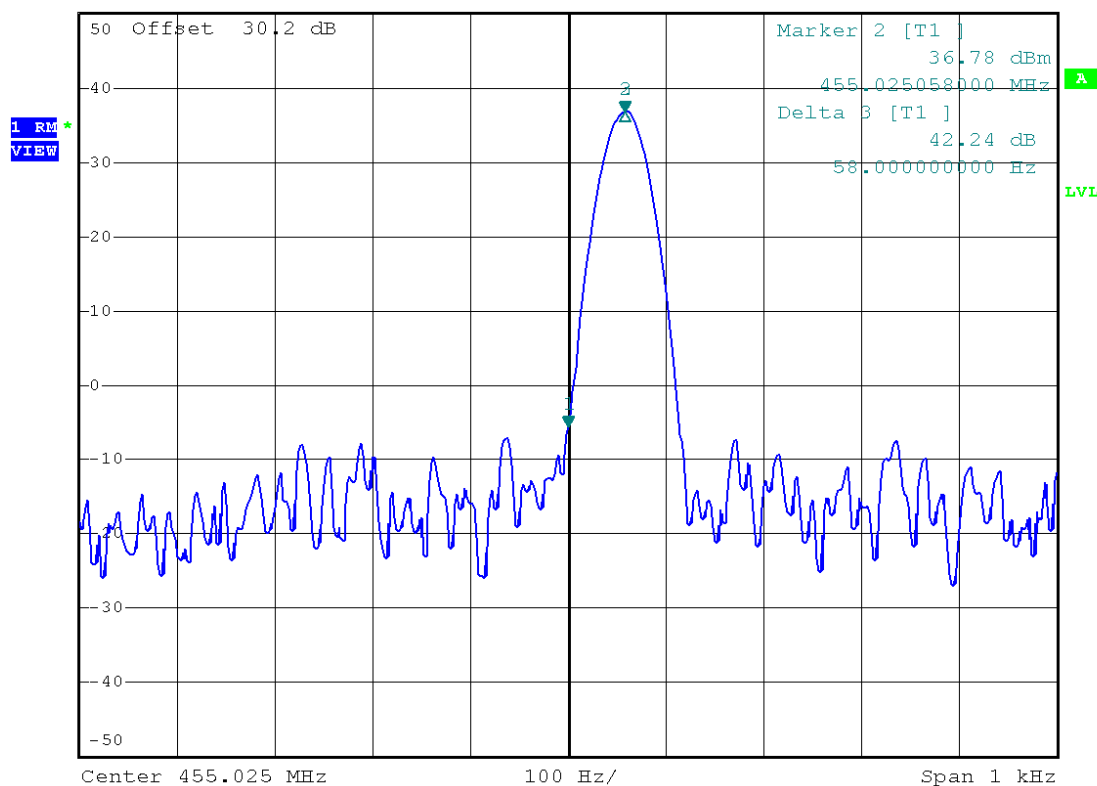

Date: 11.AUG.2008 00:01:45


6.4.11 Middle Channel / High Power / Non-Modulation

FCC Rules :	Part 2 §2.1055 & §90.231
IC Rules :	RSS-119 Section 5.3
Operating Frequency :	455.025 MHz
Channel :	Middle Channel
Power Output :	5 Watt
Limit :	2.5 ppm
Test Voltage :	10.2 Vdc
Test Temperature :	+20 °C



SD-125E

RBW 30 Hz Marker 1 [T1]
VBW 30 Hz -6.33 dBm
SWT 2.25 s 455.025000000 MHz

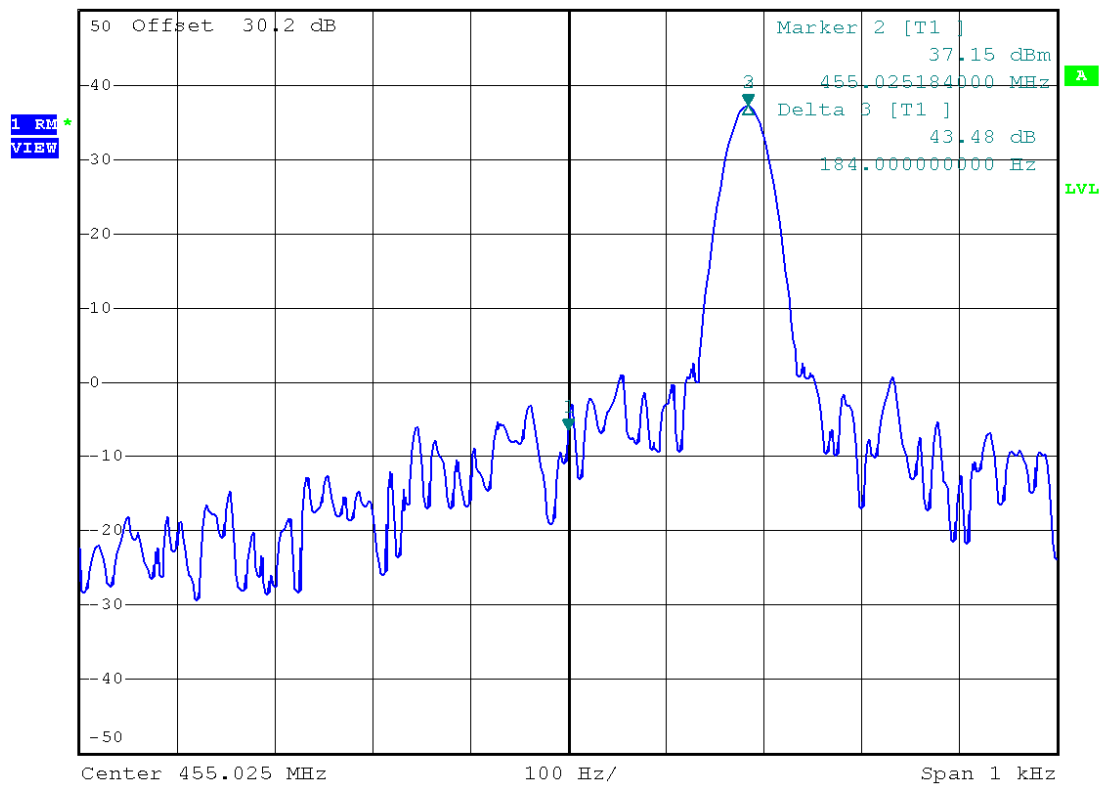

Date: 10.AUG.2008 22:23:36

6.4.12 Middle Channel / High Power / Non-Modulation

FCC Rules :	Part 2 §2.1055 & §90.231
IC Rules :	RSS-119 Section 5.3
Operating Frequency :	455.025 MHz
Channel :	Middle Channel
Power Output :	5 Watt
Limit :	2.5 ppm
Test Voltage :	13.8 Vdc
Test Temperature :	+20 °C




SD-125E

RBW 30 Hz Marker 1 [T1]
VBW 30 Hz -13.27 dBm
SWT 2.25 s 455.025000000 MHz

Ref 50 dBm

Att 50 dB

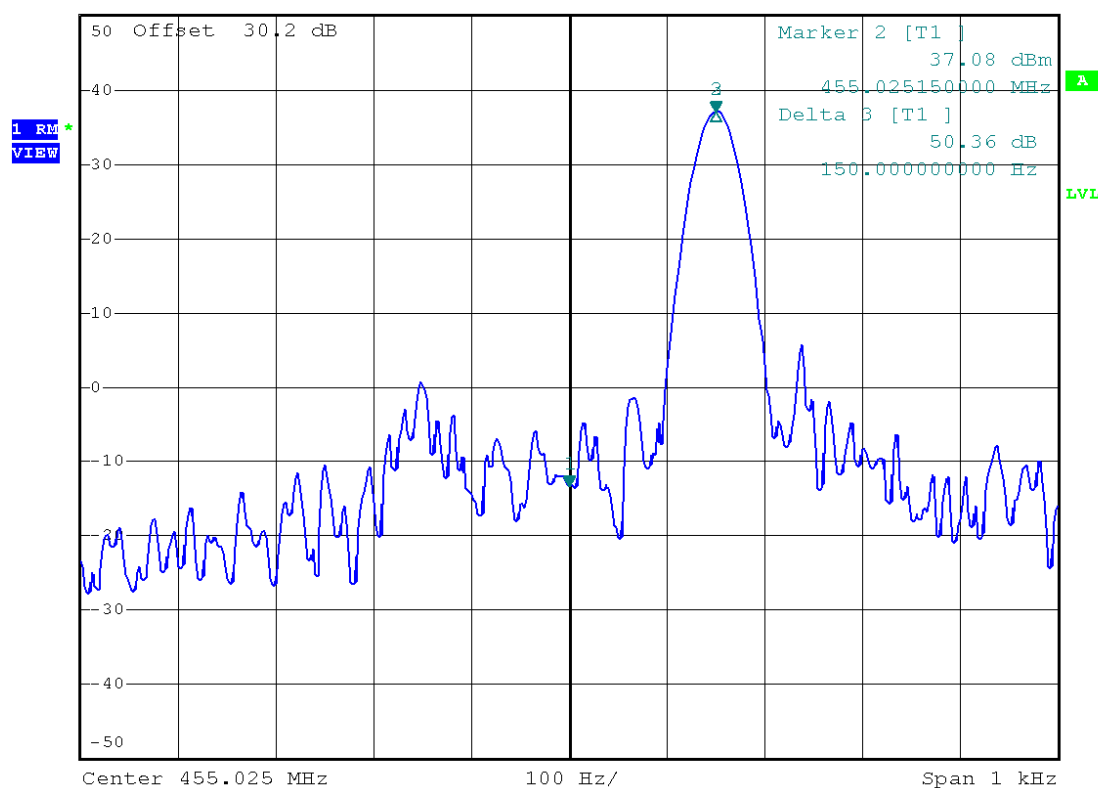


Date: 10.AUG.2008 22:25:12

6.5 Transient Frequency Behavior


6.5.1 Middle Channel / High Power / Narrow Band / Switch On

FCC Rules :	Part 90 §90.231
IC Rules :	RSS-119 Section 5.9
Operating Frequency :	455.025 MHz
Channel :	Middle Channel
Power Output :	5 Watt
Mode :	Switch on condition t_{on} , t_1 and t_2
Channel Spacing :	Narrow Band
Test Voltage :	12 Vdc

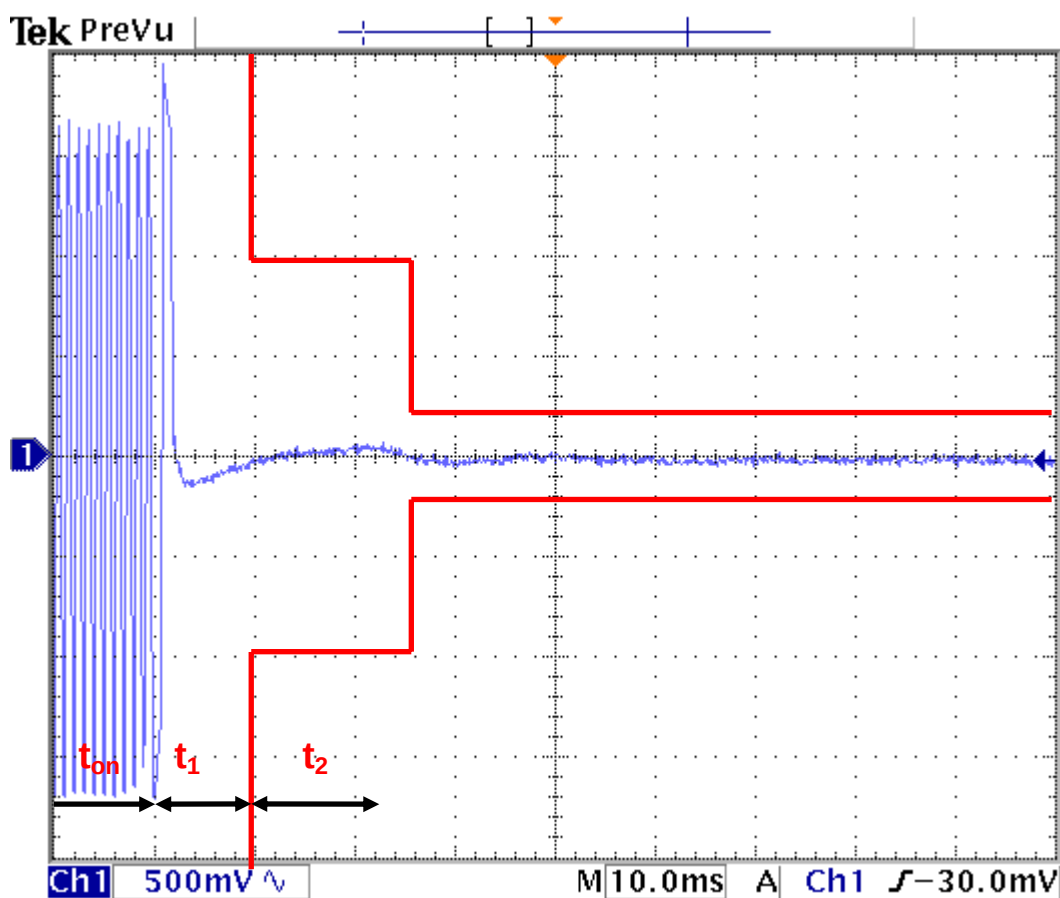


6.5.2 Middle Channel / High Power / Narrow Band / Switch Off

FCC Rules :	Part 90 §90.231
IC Rules :	RSS-119 Section 5.9
Operating Frequency :	455.025 MHz
Channel :	Middle Channel
Power Output :	5 Watt
Mode :	Switch off condition t_3 , t_{off}
Channel Spacing :	Narrow Band
Test Voltage :	12 Vdc

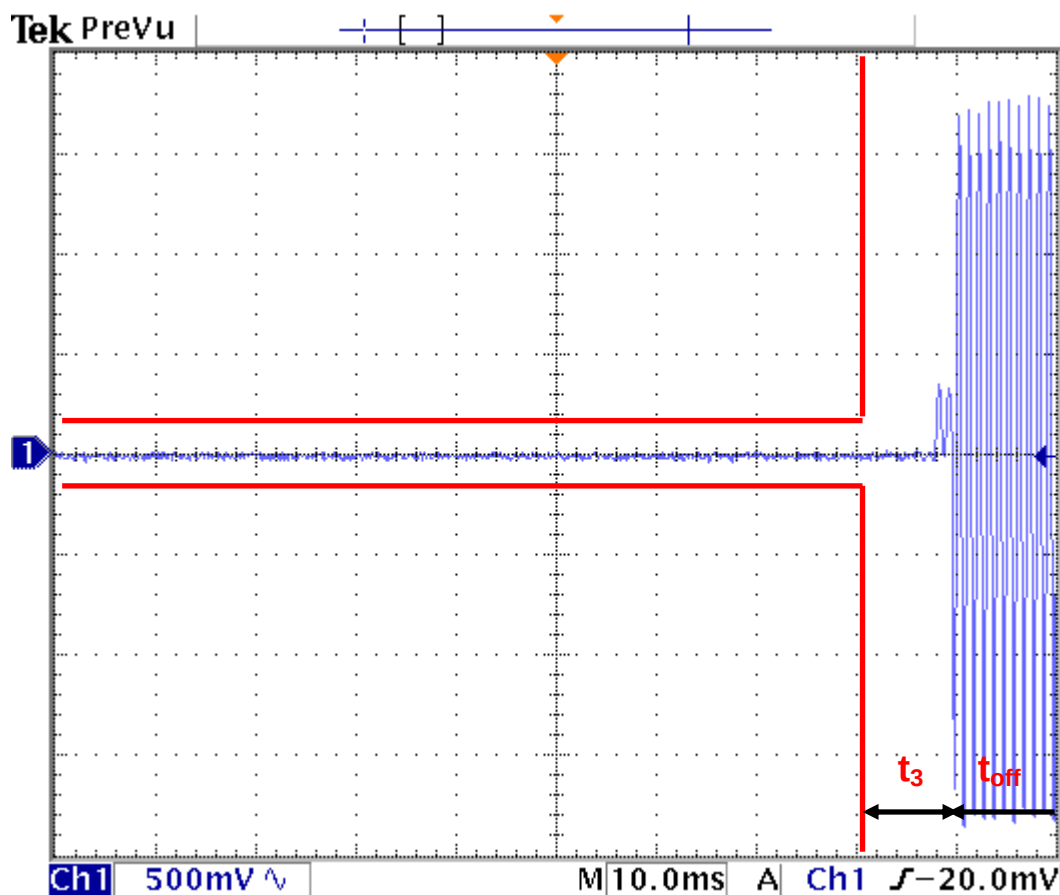


6.5.3 Middle Channel / High Power / Wide Band / Switch On

FCC Rules :	Part 90 §90.231
IC Rules :	RSS-119 Section 5.9
Operating Frequency :	455.025 MHz
Channel :	Middle Channel
Power Output :	5 Watt
Mode :	Switch on condition t_{on} , t_1 and t_2
Channel Spacing :	Wide Band
Test Voltage :	12 Vdc

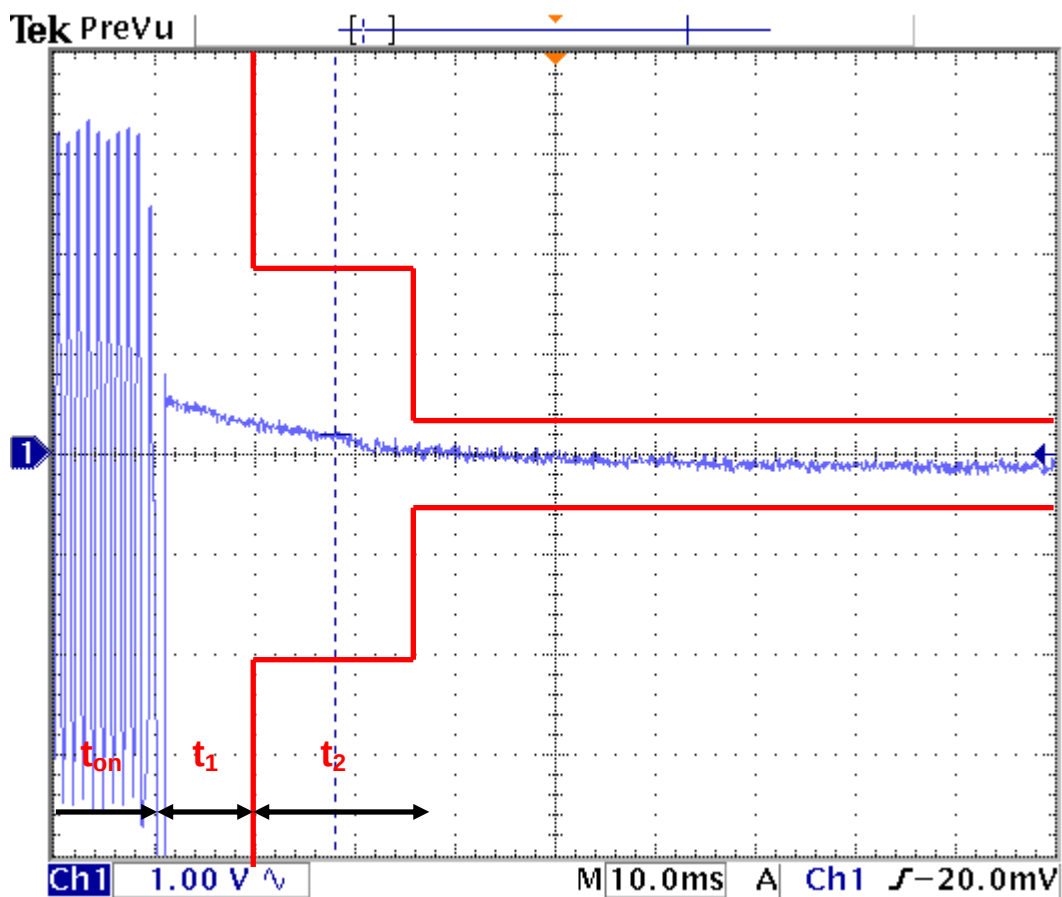

6.5.4 Middle Channel / High Power / Wide Band / Switch Off

FCC Rules :	Part 90 §90.231
IC Rules :	RSS-119 Section 5.9
Operating Frequency :	455.025 MHz
Channel :	Middle Channel
Power Output :	5 Watt
Mode :	Switch off condition t_3 , t_{off}
Channel Spacing :	Wide Band
Test Voltage :	12 Vdc

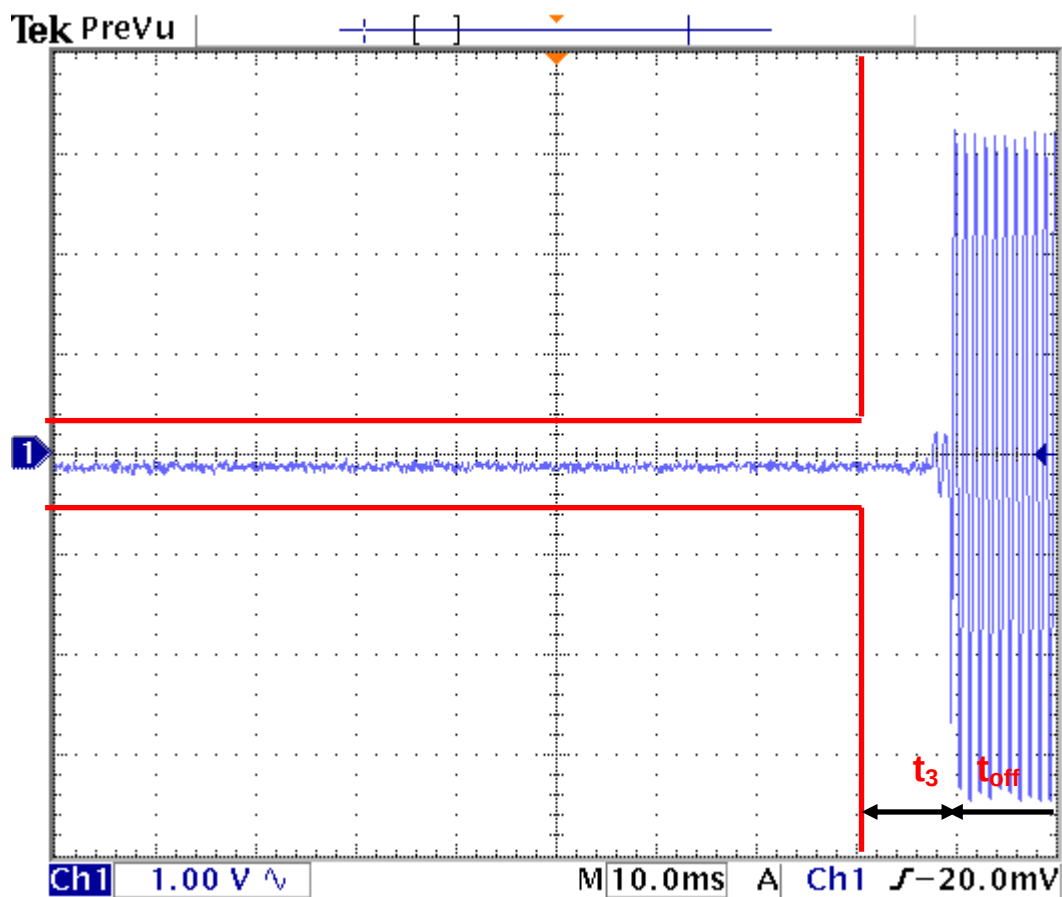

7. TEST EQUIPMENTS LIST

	EQUIPMENT	MODEL	MANUFACTURE	SERIAL NUMBER	Calibration Due date
1	Receiver	ESVN30	Rohde & Schwarz	832854/010	07/13/2009
2	Spectrum analyzer	FSP7	Rohde & Schwarz	100001	02/22/2009
3	Signal Generator	E4432B	Agilent	US40053157	07/08/2009
4	Signal Generator	E4438C	Agilent	MY45091894	07/08/2009
5	Signal Generator	GT9000	Gigatronics	9604010	02/22/2009
6	Signal Generator	2022D	Marconi Instrument	119157/001	11/14/2008
7	Signal Generator	2030D	Marconi Instrument	119330/022	11/16/2008
8	Modulation Analyzer	8901B	Agilent	3028A03124	02/22/2009
9	Audio Analyzer	8903B	Agilent	3011A09344	02/22/2009
10	Digital Oscilloscope	TDS3032	Tektronix	B019436	11/20/2008
11	Frequency Counter	R5372	Advantest	41855204	02/22/2009
12	Shield Room (7m x 4m x 3m)	N/A	SJEMC	0004	N/A
13	Turn Table	OSC-30	N/A	BWS-01	N/A
14	Antenna Mast	JAC-3	Dail EMC	N/A	N/A
15	Temperature & Humidity chanber	EN-GLMP-54	Enex	N/A	03/21/2009
16	Bilog Antenna	VULB9160	Schwarzbeck	VULB9160-3122	12/29/2008
17	Bilog Antenna	VULB9161	Schwarzbeck	VULB9161-4067	12/23/2008
18	Bilog Antenna	VULB9161	Schwarzbeck	VULB9161-4068	12/23/2008
19	Horn Antenna	BBHA 9120 D	Schwarzbeck	BBHA 9120 D 157	02/13/2009
20	Horn Antenna	BBHA 9120 D	Schwarzbeck	BBHA 9120 D 234	02/13/2009
21	Horn Antenna	BBHA 9170	Schwarzbeck	BBHA9170157	02/13/2009
22	Power Meter	E4418A	Agilent	GB38272621	11/14/2008
23	Power Sensor	E9301B	Agilent	US40010238	11/14/2008
24	Power supply	IPS-30B03DD	Interact	42052	03/20/2009
25	Directional Coupler	778D	Agilent	1144A08477	11/14/2008
26	Power Divider/Combiner	11636A	Agilent	05774	11/14/2008
27	Power Divider/Combiner	11636A	Agilent	05870	11/14/2008