

FCC / INDUSTRY CANADA MEASUREMENT REPORT

CERTIFICATION OF COMPLIANCE FCC PART90 & INDUSTRY CANADA RSS-119 CERTIFICATION

PRODUCT : Two Way Radio
Land Mobile Service (LMR)
MODEL/TYPE NO : SL7402
FCC ID : RXUSL7402
TRADE NAME : 
Maxon CIC Corp.
APPLICANT : Chongho Building, #7-61 Yangjae-Dong, Seocho-Gu, Seoul, 137-130, Korea
Attn. : Hyun Koo Kang / Senior Manager
CLASSIFICATION : TNF Licensed Non-Broadcast Station Transmitter Held to Face
FCC Part 90 Private land mobile radio services
RULE PART(S) : RSS-119 Land Mobile and Fixed Radio Transmitters and Receivers,
27.4 MHz to 960 MHz
FCC PROCEDURE : Certification
DATES OF TEST : November 26, 2007 to December 24, 2007
DATES OF ISSUE : January 4, 2008
TEST REPORT No. : BWS-08-RF-0001
TEST LAB. : BWS TECH Inc.(FCC Registration Number : 553281)

This Two Way Radio SL7402 has been tested in accordance with the measurement procedures specified in ANSI C63.4-2003 and ANSI/TIA-603-B-2002 at the BWS TECH/EMC Test Laboratory and has been shown to be complied with the electromagnetic radiated emission limits specified in FCC Rule Part 90 and Industry Canada RSS-119.

I attest to the accuracy of data. All measurement herein was performed by me or were made under my supervision. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. The results of testing in this report apply to the product/system, which was tested only. Other similar equipment may not necessarily produce the same results due to production tolerance and measurement uncertainties.

January 4, 2008
(Date)



Tested by **CY-choi**

January 4, 2008
(Date)



Reviewed by **TaeHyun, Nam**

BWS TECH Inc.

www.bws.co.kr

#611-1 Maesan-Ri, Mohyeon-Myeon, Yongin-Si, Gyeonggi-Do, 449-853 Korea

TEL: +82 31 333 5997 FAX: +82 31 333 0017

TABLE OF CONTENTS

	Pages
1. General Information	3
2. Description of Test Facility	4
3. Product Information	5
4. Summary of Test Results	8
5. Test Data	9
5.1. Power Line Conducted Emission	9
5.2. Radiated Emission Tests	13
5.3. RF Power Output (Conducted)	15
5.4. Modulation Characteristics - Audio Frequency Response	17
5.5. Modulation Characteristics - Audio Lowpass Filter Response	22
5.6. Modulation Characteristics - Modulation Limiting	24
5.7. Occupied Bandwidth	37
5.8. Spurious Emissions at Antenna Terminals	63
5.9. Field Strength of Spurious Radiation	73
5.10. Frequency Stability/Temperature Variation	75
5.11. Transient Frequency Behavior	128
6. Test Equipment List	146
 Appendix 1. Test Setup Photos	
Appendix 2. FCC ID Label and location	
Appendix 3. External Photos of EUT	
Appendix 4. Internal Photos of EUT	
Appendix 5. Block Diagram	
Appendix 6. Schematics	
Appendix 7. Theory of Operation	
Appendix 8. Part List / Tune up Procedure	
Appendix 9. User Manual	

FCC / INDUSTRY CANADA TEST REPORT

Scope - Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)

1. General Information

Applicant

Company Name Maxon CIC Corp.
Company Address Chongho Building, #7-61 Yangjea-Dong, Seocho-Gu, Seoul, 137-130, Korea
Phone/Fax Phone : +82-2-3498-3060 Fax : 02-3498-3115

Manufacturer

Company Name Maxon CIC Thailand Co., Ltd(MCTL)
Company Address 40/23 Moo 5 Rojana Industrial Park Tambol U-Thai, Amphur U-Thai Ayutthaya 13210 Thailand
Phone/Fax Tel No. : +66-(0)35-719-498~501 Fax No. : +66-(0)35-719-492

- **EUT Type** Two Way Radio (LMR)
- **Model Number** SL7402
- **FCC Identifier** RXUSL7402
- **S/N** 0710000001
- **FCC Rule Part(s)** FCC Part 90 Private land mobile radio services
RSS-119 Land Mobile and Fixed Radio Transmitters and Receivers,
27.4 MHz to 960 MHz
- **FCC Classification** TNF : Licensed Non-Broadcast Station Transmitter
- **Freq. Range** 400 MHz ~ 470 MHz
- **Channel** 256 Channels
- **Modulation Method** FM
- **Emission Designator** 11K0F3E, 16K0F3E
- **RF Power Output** 1/4 Watt
- **Test Procedure** ANSI C63.4-2003 and ANSI/TIA-603-B-2002
- **Dates of Tests** November 26, 2007 to December 18, 2007
- **Place of Tests** BWS TECH Inc.(FCC Registration Number : 553281)
#611-1 Maesan-Ri, Mohyeon-Myeon, Yongin-Si, Gyeonggi-Do, 449-853 Korea
TEL: +82 31 333 5997 FAX: +82 31 333 0017
- **Test Report No.** BWS-08-RF-0001

2. Description of Test Facility

The measurement for radiated and conducted emission test were conducted at the open area test site of BWS TECH Inc. facility located at #611-1 Maesan-Ri, Mohyeon-Myeon, Yongin-Si, Gyeonggi-Do, 449-853 Korea. The site is constructed in conformance with the requirements of the ANSI C63.4-2000 and CISPR Publication 16. The BWS TECH measurement facility has been filed to the Commission with the FCC for 3 and 10-meter site configurations. Detailed description of test facility was found to be in compliance with the requirements of Section 2.948 FCC Rules according to the ANSI C63.4-2000 and registered to the Federal Communications Commission (Registration Number : 553281).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C.63.4-2000) was used in determining radiated and conducted emissions from the Maxon C IC Corp. Two Way Radio Model : SL7402.

3. Product Information

The Equipment Under Test (EUT) is the MAXON CIC CO LTD Two Way Radio model: SL7402(FCC ID: RXUSL7402).

SL7402 is FM transceiver operating between 400 ~ 470 MHz with an output power of 4 W (1 W at low power).

The SL7402 offers many advanced features found in more expensive Land Mobile Radios.

SL7402 is 256 channel portable FM transceiver constructed with a microprocessor controlled, temperature compensated Phase Locked Loop (PLL) frequency synthesizer. The radio features a double conversion receiver and a direct FM transmitter modulator.

3.1 DC Voltage and Currents

The DC voltages applied to and DC currents into the several elements of the final radio frequency amplifying stage for normal operation over power range were;

Standby: 7.4 Volts, 0.12 Ampare

Receive: 7.4 Volts, 0.60 Ampare

Low Power: 7.4 Volts, 0.70 Ampare

High Power: 7.4 volts, 1.90 Ampare

3.2 Emission Designator

Type of Emission : F3E

Necessary Bandwidth and Emission Bandwidth:

12.5 kHz (Narrow Band) : Bn = 11K0F3E

25 kHz (Wide Band) : Bn = 16K0F3E

Calculation:

Maximum Modulation(M) in kHz : 3

Maximum Deviation(D) in kHz : 2.5(NB) and 5(WB)

Constant Factor(k) : 1

$B_n = 2M + 2DK$

3.3 General Specification

GENERAL

Frequency Range	:	400 ~ 470 MHz
Modulation Type	:	11KOF3E /16KOF3E (FM)
Channel capacity	:	256 channels
Channel spacing	:	12.5 KHz/25KHz
Power Supply	:	DC 7.4V, li-ion polymer- Rechargeable Pack High Transmitter (4W) < 2.5A (li-ion polymer Rechargeable Pack)
Current Drain	:	Low Transmitter (1W) < 1.0A (li-ion polymer Rechargeable Pack) Receiver (0.5W) < 500mA
Battery Life	:	10hrs (li-ion polymer Rechargeable Pack) (at 5%-5%-90% transmit-receive-standby cycles)
Operating Temperature	:	-30 °C to +60 °C
Dimensions	:	53(W) x 120(H) x 32.5(D) mm with battery pack
Weight (W/Batteries)	:	290g (with 1500mAh li-ion polymer battery)

TRANSMITTER

Power Output	:	High (4W), Low (1W)
Frequency Stability	:	Better than +/- 2.5ppm within operating temperature
Spurious & Harmonics	:	-36dBm
Audio Distortion	:	Less than 5% (1KHz tone 6 0% modulation)
Audio Response @6dB/oct	:	-10.5 / 0 / +9.5dB (pre-emphasized)

RECEIVER

Sensitivity (20dB SINAD)	:	< 1uVemf
Selectivity	:	< -60dB/-70dB
Inter-modulation	:	< -65dB
Spurious and image rejection	:	< -70dB
Maximum Audio Output	:	More than 1W
Audio Distortion	:	less than 5%

3.4 EUT operating conditions & test configuration

3.4.1 Client Condition

Temperature : -30 °C ~ +60 °C

Humidity : 95 %

3.4.2 EUT Operating Condition

Operating Mode : Transmitter was operated in a continues transmission mode with the carrier modulated as specified in the test data.

Special test Software : Not Used.

Special test Hardware : Not Used.

TX Frequency Band : 400 MHz ~ 470 MHz

Test Frequencies :	1st	400.025 MHz
	2nd	423.025 MHz
	3rd	446.025 MHz
	4th	469.975 MHz

Modulation : FM Modulation

Modulation Signal Source : External Source

4. Summary of Test Results

TEST REQUIREMENTS	FCC Paragraph	IC Paragraph	Result
Power Line Conducted Emission	§15.207	RSS-Gen §7.2.2	Pass
Radiated Emission Tests	§15.209	RSS-Gen §6	Pass
RF Power Output (Conducted)	§2.1046	RSS-119 §6.2	Pass
Audio Frequency Response	§2.1047(A)	RSS-119 §6.6	Pass
Audio Low pass Filter Response	§2.1047(A)	RSS-119 §6.6	Pass
Modulation Limiting	§2.1047(B)	RSS-119 §6.6	Pass
Occupied Bandwidth	§2.1049	RSS-119 §6.4	Pass
Spurious Emissions at Antenna Terminals	§2.1051	RSS-119 §6.3	Pass
Field Strength of Spurious Radiation	§2.1053	RSS-119 §6.3	Pass
Frequency Stability/Temperature Variation	§2.1055	RSS-119 §7.0	Pass
Transient Frequency Behavior	§90.214	RSS-119 §7.0	Pass

5. TEST DATA

5.1 Power Line Conducted Emission

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 kHz on the 230V AC power and return leads of the EUT according to the methods defined in FCC Part 15.207. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 3.1.5. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position producing maximum conducted emissions.

5.1.1 Test Condition

Frequency Range of Test : 150 kHz to 30 MHz

Test Standard : FCC Part 15.207

Test Date : December 20, 2007

Temperature/Humidity : 26 °C/ 42 %

5.1.2 Test Standard

Item	Frequency Range (MHz)	Limit (dBuV)	
		Quasi-Peak	Average-Peak
☐ Class A	0.15 ~ 0.5	79	66
	0.5 ~ 30	73	60
☒ Class B	0.15 ~ 0.5	66 – 56	56 – 46
	0.5 ~ 5	56	46
	5 ~ 30	60	50

5.1.3 Test Equipment List

Equipment Type	Model	Manufacture	Serial No	Cal Due Date
TEST RECEIVER	ESPI	ROHDE & SCHWARZ	100063	11. 19. 2008
Conducted Cable	N/A	N/A	N/A	N/A
LISN	FCC-LISN-50-50-2-02	FCC	03074	11. 02. 2008

5.1.4 Test Result of Power Line Conducted Emission

EUT : SL7402
Input Voltage : 230V, 50Hz

Power Line Conducted Emission Test Results : **PASS**

Test data sheets follow.

Freq [MHz]	Correction		Phase [H/N]	Peak Mode				Average Mode			
	AMN	C.L		Limit	Reading	Emission Level	Margin	Limit	Reading	Emission Level	Margin
				[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]
0.150	0.06	0.03	N	66.00	61.93	62.02	3.98	56.00	43.94	44.03	11.97
0.186	0.06	0.03	N	65.00	60.96	61.05	3.95	55.00	31.32	31.41	23.59
0.222	0.07	0.10	N	64.00	58.13	58.30	5.70	54.00	28.30	28.47	25.53
0.270	0.07	0.16	N	62.60	53.63	53.86	8.74	52.60	20.46	20.69	31.91
0.334	0.08	0.22	N	60.90	48.88	49.18	11.72	50.90	17.29	17.59	33.31
0.434	0.08	0.26	N	56.00	44.31	44.65	11.35	46.00	32.35	32.69	13.31

Notes:


1. All modes of operation were investigated and the worst-case emissions are reported.
See the plots in next 2 pages.
2. Line N = (Neutral), Line H = (Hot)
3. Measurement uncertainty estimated at ± 1.38 dB.
The measurement uncertainty is given with a confidence of 95.45 % with the coverage factor, k=2

PLOTS OF EMISSIONS



RBW 9 kHz
MT 20 ms

Att 0 dB AUTO PREAMP OFF

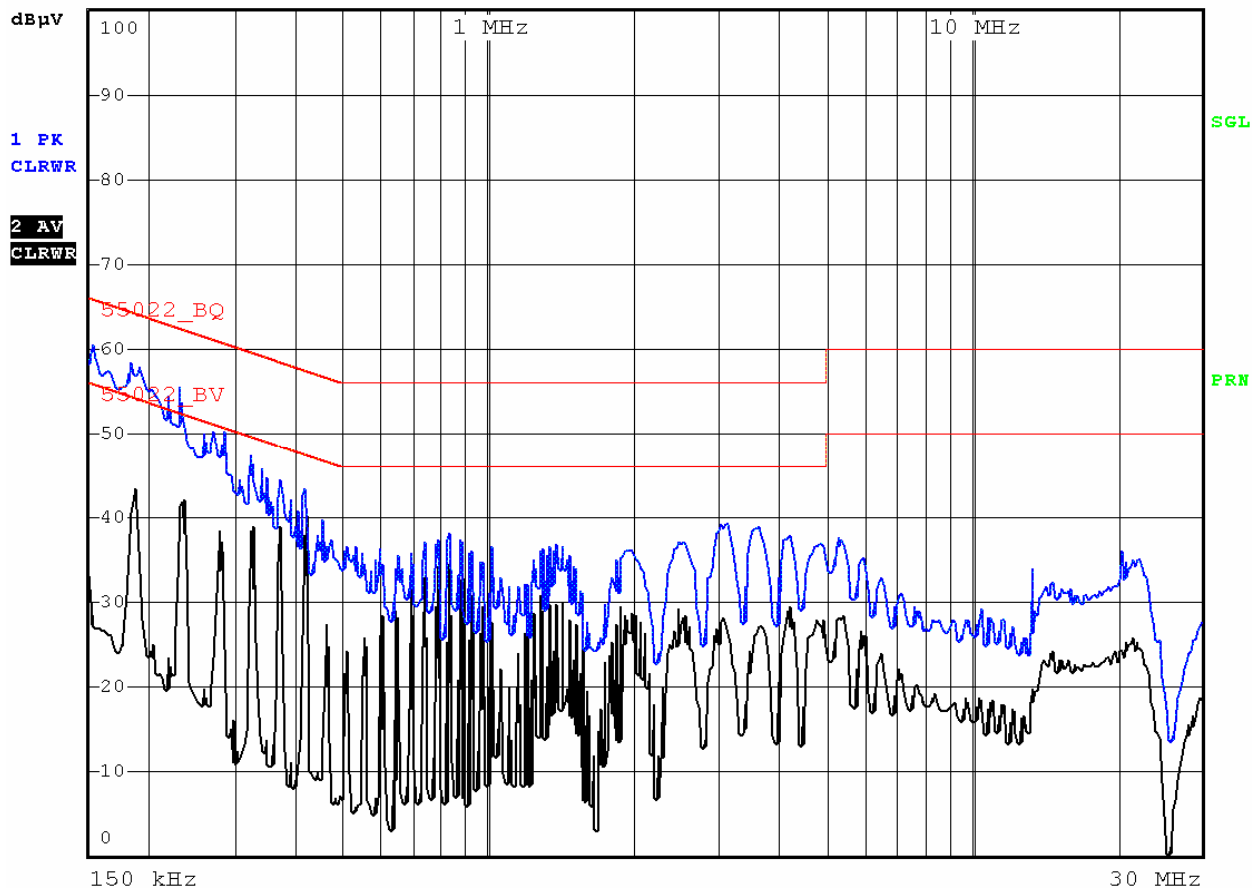


Test Model: SL7402
Test Mode: HOT
Classification: FCC Part 15.207

PLOTS OF EMISSIONS



RBW 9 kHz
MT 20 ms

Att 0 dB AUTO PREAMP OFF

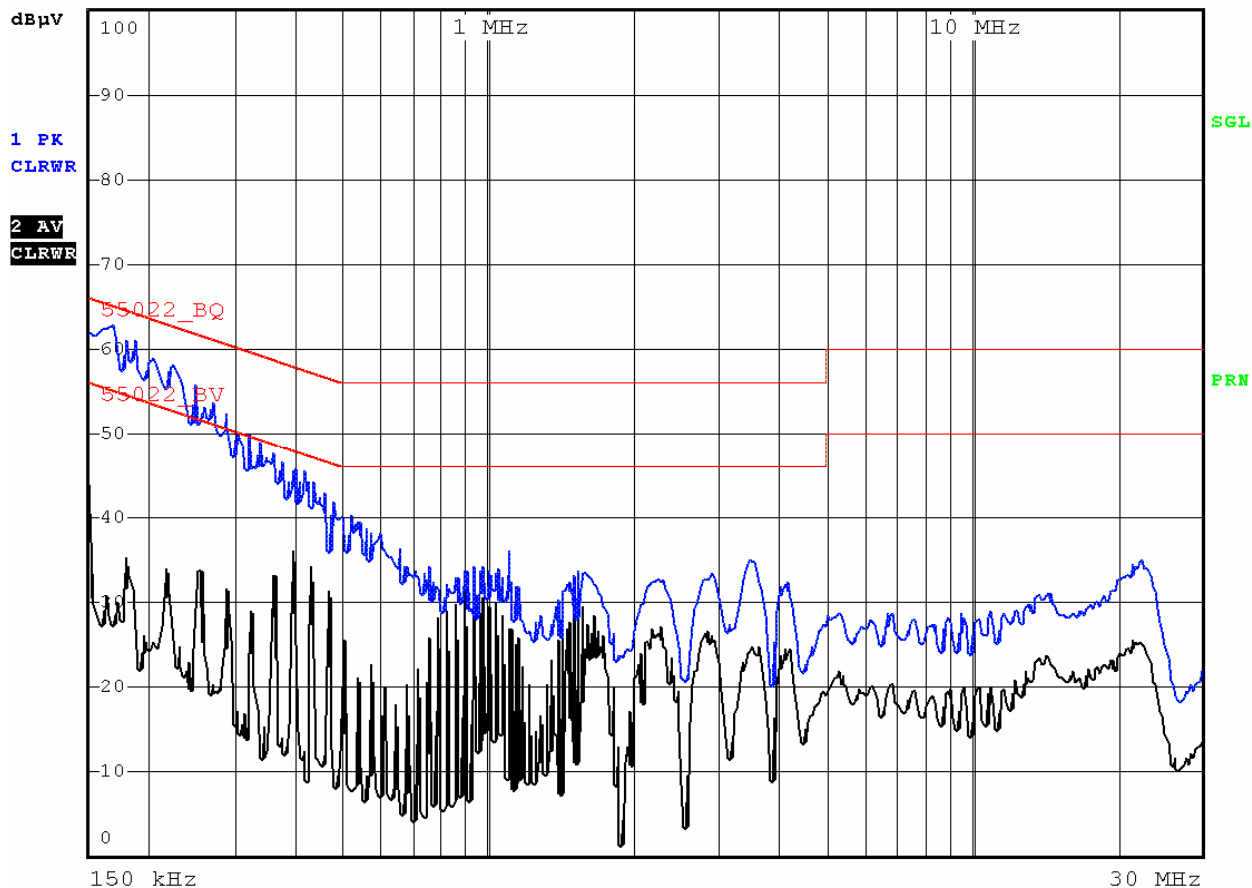

Test Model: SL7402
Test Mode: NEUTRAL
Classification: FCC Part 15.207

5.2 Radiated Emission Test (Stand-by and Receive Mode)

Radiated emissions from 30 MHz to 1000 MHz were measured with a bandwidth of 120 kHz according to the methods defined in FCC Part 15.209. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.

5.2.1 Test Condition

Frequency Range of Test : 30 MHz to 1000 MHz
Test Standard : FCC Part 15.209
Test Date : December 20, 2007
Temperature/Humidity : 13 °C/ 39 %

5.2.2 Test Standard

Frequency Range (MHz)	Limit (dBuV)	
	Quasi-Peak	Average-Peak
30 ~ 88	40.0	N/A
88 ~ 216	43.5	N/A
216 ~ 960	46.0	N/A
Above 960	54.0	N/A

5.2.3 Test Equipment List

Equipment Type	Model	Manufacture	Serial No	Cal Due Date
Bilog Antenna	VULB 9160	SCHWARZBECK	9160-3122	12. 29. 2008
Open Site Cable	N/A	N/A	N/A	N/A
Antenna Mast	JAC-3	DAIL EMC	N/A	N/A
Antenna Turntable Controller	JAC-2	JAEMC	N/A	N/A
EMI Receiver	ESVN30	ROHDE & SCHWARZ	832854/010	07. 13. 2008

5.2.4 Test Result of Radiated Emission

EUT : SL7402

Test distance : 3 m

Radiated Emission Test Result : **PASS**

Test data sheets follow.

Frequency [MHz]	Reading [dB μ V]	Polarization [*H/**V]	Ant.Factor [dB/m]	Cable Loss [dB]	Limit [dB μ V/m]	Emission Level [dB μ V/m]	Margin [dB]
1st Channel : 400.025 MHz							
353.675	13.77	V	14.69	4.18	40.00	32.64	7.36
353.675	13.42	V	14.69	4.18	40.00	32.29	7.71
707.350	10.13	H	12.00	6.20	43.50	28.33	15.17
707.350	8.60	H	12.31	6.20	43.50	27.11	16.39
2nd Channel : 423.025 MHz							
376.675	14.62	V	15.23	4.36	46.00	34.22	11.78
376.675	10.51	V	15.23	4.36	46.00	30.11	15.89
753.350	-1.75	H	22.23	6.52	46.00	26.99	19.01
753.350	-1.26	H	22.23	6.52	46.00	27.48	18.52
3rd Channel : 446.025 MHz							
399.675	14.13	V	15.78	4.55	46.00	34.46	11.54
399.675	14.26	V	15.78	4.55	46.00	34.59	11.41
799.350	-1.03	H	22.63	6.73	46.00	28.33	17.67
799.350	-0.44	H	22.63	6.73	46.00	28.92	17.08
4th Channel : 469.975 MHz							
423.625	6.03	V	16.32	4.65	46.00	27.01	18.99
423.625	5.93	V	16.32	4.65	46.00	26.91	19.09
847.250	-5.47	H	22.94	6.91	46.00	24.38	21.62
847.250	-4.75	H	22.94	6.91	46.00	25.10	20.90

Notes:

- * H : Horizontal polarization , ** V : Vertical polarization
- Emission Level = Reading + Antenna factor + Cable loss
- Margin value = Emission Level - Limit
- All other emissions not reported were more than 25dB below the permitted limit.
- Measurement uncertainty estimated at ± 4.08 dB.
The measurement uncertainty is given with a confidence of 95.45 % with the coverage factor, k=2.

5.3 RF Power Output (Conducted)

5.3.1 Specification

FCC Rules Part 2, Section 2.1046
FCC Rules Part 90, Section 90.205
Industry Canada, RSS-119 Section 6.2

5.3.2 Method of Measurement

ANSI/TIA-603-B-2002 Section 2.2.1

5.3.3 Measurement Set-Up

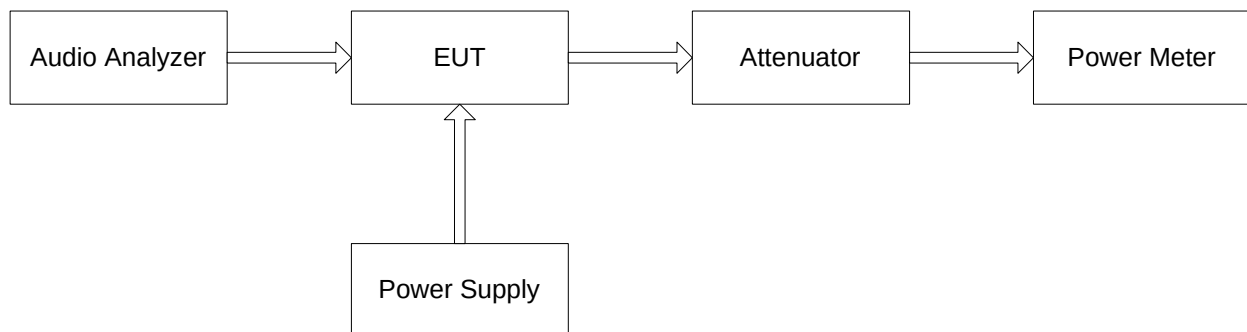


Fig.1

5.3.4 Test Equipment List

Equipment	Model Name	Manufacturer
EUT	SL7402	Maxon CIC Corp.
Power Supply	IPS-30B03DD	INTERACT
Audio Analyzer	8903B	Agilent
Attenuator	33-30-33	WEINSCHEL
Power Sensor	8481A	Agilent
Power Meter	E4418A	Agilent

5.3.5 Test Procedure

- The unit was turn-up in accordance with the alignment procedure stated in the FIG. 1 , and was loaded into a 50 ohm resistive termination.
- The unit was powered though its normally accompanied power cord by a DC power supply.
- Power supply voltage was set to nominal voltage at the power supply terminals with transmitter off.
- The unit was operated for three consecutive test cycles of 15 minutes standby and 5 minutes in transmitting.
- The EUT was aligned for transmitter operation on three frequencies(F_o) at full rated power per the tune-up procedure outlined in the Product Specification. This represents frequencies at the 1st, 2nd, 3rd and 4th end of the EUT operating frequency band.

5.3.6 Test Result

Frequency (MHz)	Measured Power (dBm)	Rated Power (Watts)
Low Power (Ref. 1 Watt)		
400.025	29.81	0.957
423.025	29.81	0.957
446.025	29.97	0.993
469.975	29.97	0.993
High Power (Ref. 4 Watts)		
400.025	35.55	3.589
423.025	35.49	3.540
446.025	35.88	3.873
469.975	35.94	3.926

5.4 Modulation Characteristics – Audio Frequency Response

5.4.1 Specification

FCC Rules Part 2, Section 2.1047(a)
FCC Rules Part 90, Section 90.207 & 90.242(b)(8)
Industry Canada, RSS-119 Section 6.6

5.4.2 Method of Measurement

ANSI/TIA-603-B-2002 Section 2.2.6

5.4.3 Measurement Set-Up

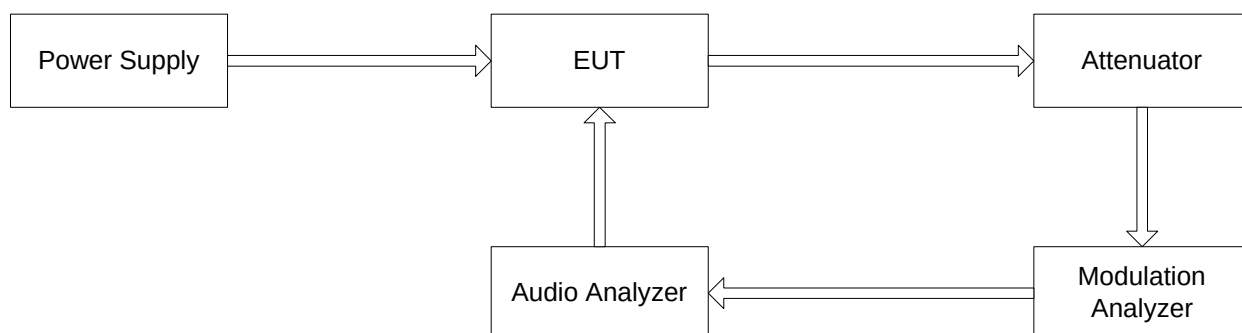


Fig.2

5.4.4 Test Equipment List

Equipment	Model Name	Manufacturer
EUT	SL7402	Maxon CIC Corp.
Power Supply	IPS-30B03DD	INTERACT
Audio Analyzer	8903B	Agilent
Modulation Analyzer	8901B	Agilent
Attenuator	33-30-33	WEINSCHEL

5.4.5 Test Procedure

- The unit was turn-up in accordance with the alignment procedure stated in the FIG. 2 , and was loaded into a 50 ohm resistive termination.
- The audio analyzer was connected to the audio input circuit/microphone of the EUT.
- The audio signal input was adjusted to obtain 20% modulation at 1 kHz, and this point was taken as the 0 dB reference level.
- With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 100 Hz to 10 kHz.
- The response in dB relative to 1 kHz was then measured, using the HP 8901A Modulation Analyzer.
- No limit is required by the FCC for audio frequency response. The measured audio response data shows the roll-off curve at 3 kHz.


5.4.6 Test Results

5.4.6.1 Test Data 1

FCC Rules :	Part 2 §2.1047(a) & §90.242(b)(8)
IC Rules :	RSS-119 Section 6.6
Operating Frequency :	400.025 MHz
Channel :	1st Channel
Reference Voltage :	7.4 VDC
Power Output :	4 Watts

Audio Input Frequency (Hz)	Attenuation (dB)	
	Channel Spacing : 12.5 kHz	Channel Spacing : 25 kHz
100	-32.0	-32.1
200	-24.4	-24.3
300	-15.4	-15.3
400	-10.1	-10.0
500	-7.4	-7.5
600	-5.3	-5.4
700	-3.6	-3.5
800	-2.3	-2.4
900	-1.0	-1.1
1000	0	0
1500	+3.7	+3.6
2000	+6.3	+6.2
2500	+7.0	+7.1
3000	+6.0	+6.1
4000	+0.6	+0.5
5000	-6.4	-6.5
6000	-12.7	-12.8
7000	-18.4	-18.5
8000	-23.3	-23.5
9000	-27.3	-27.2
10000	-30.0	-30.3

5.4.6.2 Graph 1

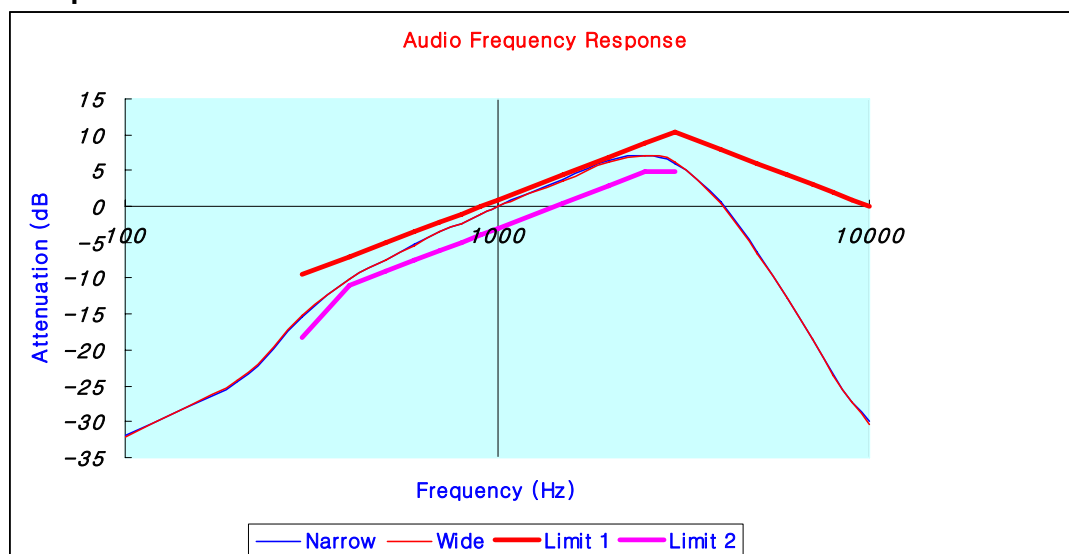


5.4.6.3 Test Data 2

FCC Rules :	Part 2 §2.1047(a) & §90.242(b)(8)
IC Rules :	RSS-119 Section 6.6
Operating Frequency :	423.025 MHz
Channel :	2nd Channel
Reference Voltage :	7.4 VDC
Power Output :	4 Watts

Audio Input Frequency (Hz)	Attenuation (dB)	
	Channel Spacing : 12.5 kHz	Channel Spacing : 25 kHz
100	-32.0	-32.1
200	-24.3	-24.3
300	-15.2	-15.3
400	-10.0	-10.1
500	-7.4	-7.4
600	-5.3	-5.5
700	-3.6	-3.4
800	-2.3	-2.4
900	-1.0	-1.1
1000	0	0
1500	+3.7	+3.6
2000	+6.3	+6.2
2500	+7.1	+7.0
3000	+6.0	+6.0
4000	+0.5	+0.6
5000	-6.5	-6.5
6000	-12.8	-12.7
7000	-18.3	-18.4
8000	-23.3	-23.4
9000	-27.3	-27.4
10000	-30.1	-29.9

5.4.6.4 Graph 2

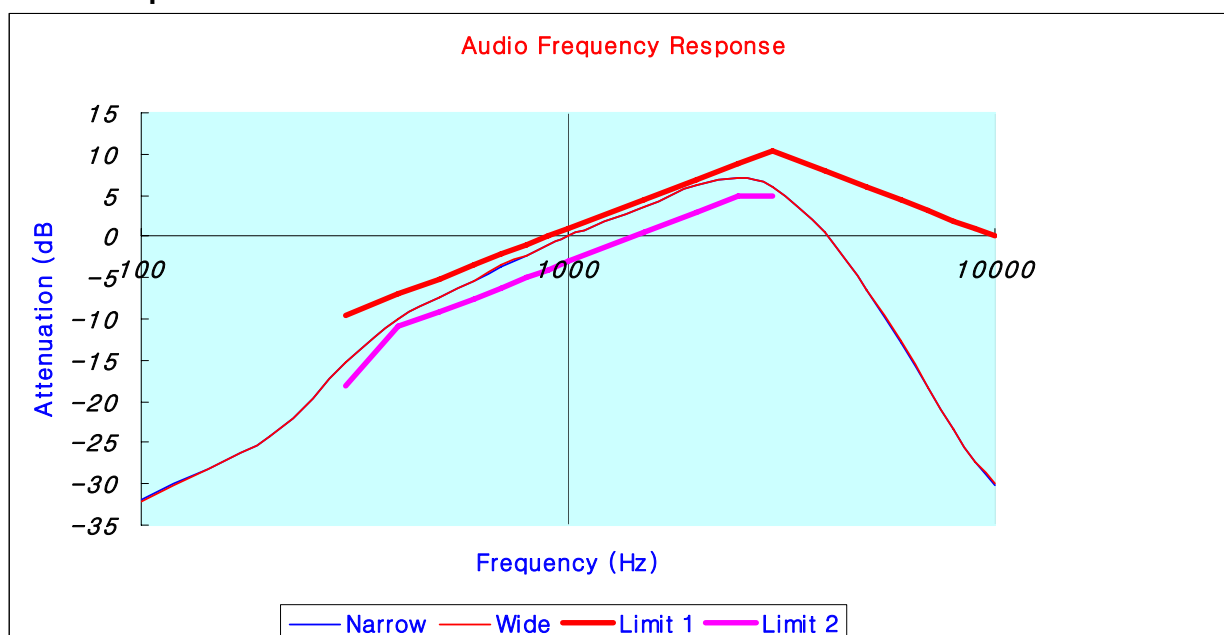


5.4.6.5 Test Data 3

FCC Rules :	Part 2 §2.1047(a) & §90.242(b)(8)
IC Rules :	RSS-119 Section 6.6
Operating Frequency :	446.025 MHz
Channel :	3rd Channel
Reference Voltage :	7.4 VDC
Power Output :	4 Watts

Audio Input Frequency (Hz)	Attenuation (dB)	
	Channel Spacing : 12.5 kHz	Channel Spacing : 25 kHz
100	-31.8	-32.0
200	-24.4	-24.4
300	-15.2	-15.3
400	-10.0	-10.0
500	-7.5	-7.3
600	-5.4	-5.4
700	-3.6	-3.5
800	-2.4	-2.5
900	-1.1	-1.0
1000	0	0
1500	+3.8	+3.6
2000	+6.3	+6.3
2500	+7.1	+7.0
3000	+6.1	+6.0
4000	+0.5	+0.5
5000	-6.5	-6.6
6000	-12.8	-12.7
7000	-18.4	-18.5
8000	-23.4	-23.3
9000	-27.3	-27.2
10000	-29.9	-30.1

5.4.6.6 Graph 3

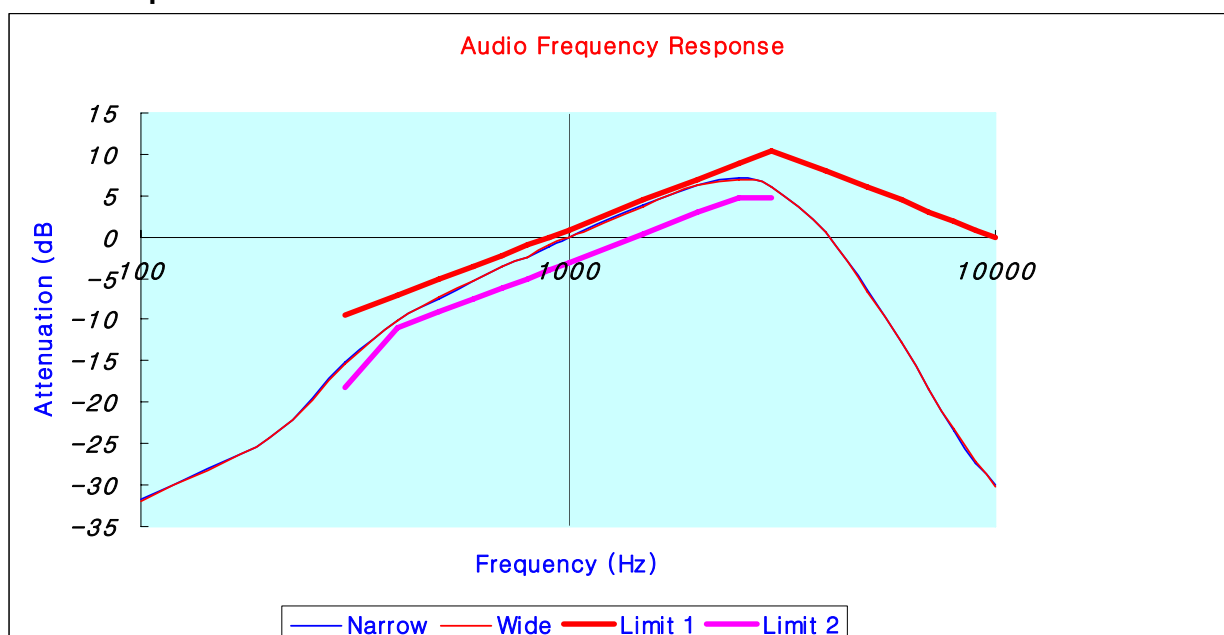


5.4.6.7 Test Data 4

FCC Rules :	Part 2 §2.1047(a) & §90.242(b)(8)
IC Rules :	RSS-119 Section 6.6
Operating Frequency :	469.975 MHz
Channel :	4th Channel
Reference Voltage :	7.4 VDC
Power Output :	4 Watts

Audio Input Frequency (Hz)	Attenuation (dB)	
	Channel Spacing : 12.5 kHz	Channel Spacing : 25 kHz
100	-32.0	-32.0
200	-24.3	-24.4
300	-15.3	-15.2
400	-10.1	-10.0
500	-7.4	-7.3
600	-5.3	-5.3
700	-3.5	-3.4
800	-2.4	-2.3
900	-1.1	-1.0
1000	0	0
1500	+3.8	+3.7
2000	+6.4	+6.3
2500	+7.0	+7.1
3000	+6.2	+6.1
4000	+0.6	+0.5
5000	-6.4	-6.3
6000	-12.6	-12.7
7000	-18.5	-18.4
8000	-23.4	-23.5
9000	-27.3	-27.4
10000	-30.1	-30.2

5.4.6.8 Graph 4

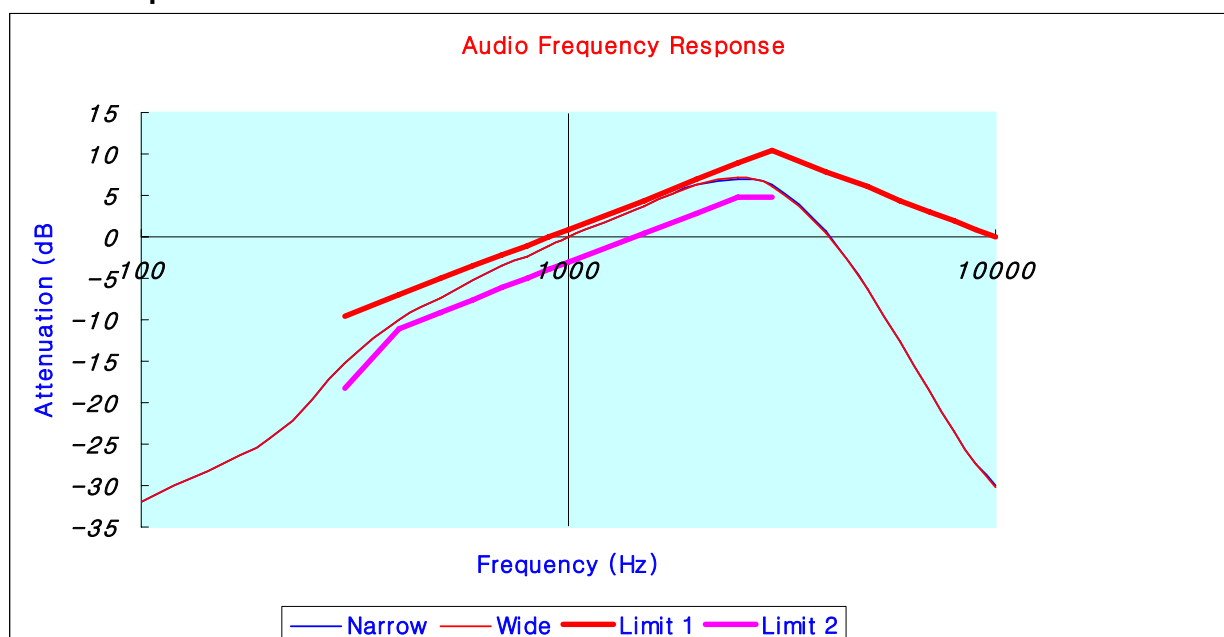

5.5 Modulation Characteristics – Audio Low pass Filter Response

5.5.1 Specification

FCC Rules Part 2, Section 2.1047(a)
FCC Rules Part 90, Section 90.207 & 90.242(b)(8)
Industry Canada, RSS-119 Section 6.6

5.5.2 Method of Measurement

ANSI/TIA-603-B-2002 Section 2.2.15

5.5.3 Measurement Set-Up

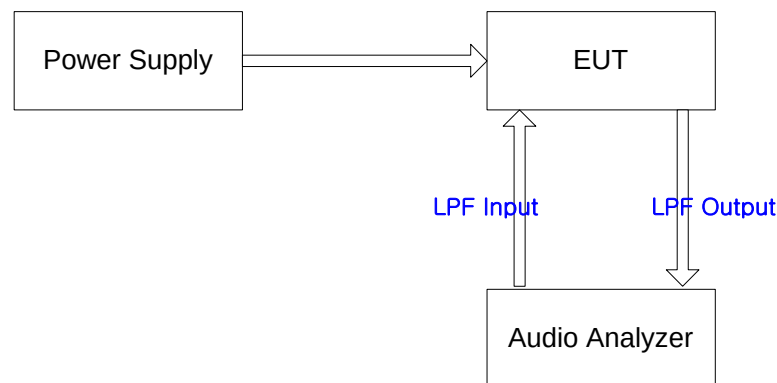


Fig.3

5.5.4 Test Equipment List

Equipment	Model Name	Manufacturer
EUT	SL7402	Maxon CIC Corp.
Power Supply	IPS-30B03DD	INTERACT
Audio Analyzer	8903B	Agilent

5.5.5 Test Procedure


- The unit was turn-up in accordance with the alignment procedure stated in the FIG. 3 , and was loaded into a 50 ohm resistive termination.
- To measure the audio low pass filter response, an audio analyzer were connected to the actual Printed Circuit Board of the transmitter.
- Audio analyzer monitored the output of the audio filter.
- An AF input level was maintained constant at least 10 dB below the saturation level at 1 kHz tone.
- Record the dB level of the 1 kHz tone of the audio analyzer.
- Set the audio input frequency to desired test frequency between 3 kHz and upper low pass filter limit.
- Record dB level on the audio analyzer.
- Calculate the audio frequency response as $LPF\ response = LEV_{FREQ} - LEV_{REF}$
- Audio frequencies in 3 kHz to 20 kHz : Minimum Attenuation to reference point shell be greater than $60\log(f/3)$ dB, above 20 kHz, at least 50dB attenuation. ("f" in kHz)

5.5.5 Test Result

5.5.5.1 Data

Audio Input Frequency (Hz)	Attenuation (dB)	Limit (dB)
100	-3.0	-
200	-2.8	-
400	-2.8	-
600	-2.9	-
800	-2.9	-
1000	-2.9	-
1500	-2.4	-
2000	-2.0	-
2500	-3.2	-
3000	-4.8	0
3500	-8.6	-4
4000	-12.0	-7.5
4500	-16.1	-10.5
5000	-19.2	-13.3
6000	-25.7	-18.0
7000	-31.5	-22.0
8000	-36.7	-25.5
9000	-40.5	-28.5
10000	-44.3	-31.3

5.5.5.2 Graph

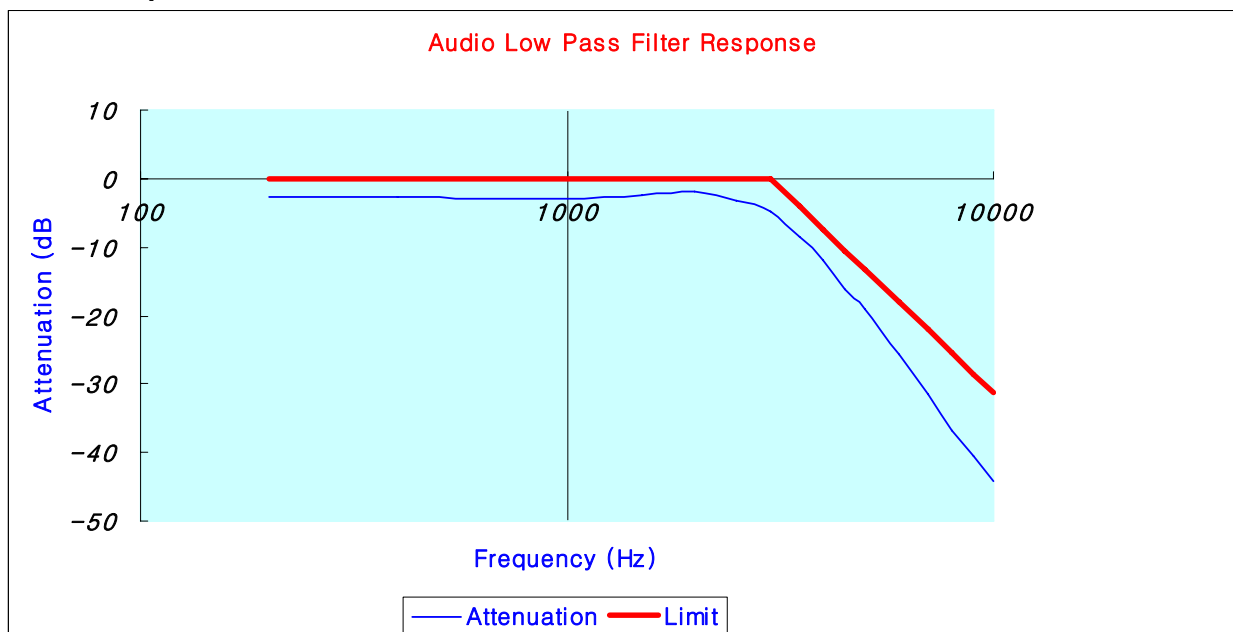

5.6 Modulation Characteristics – Modulation Limiting

5.6.1 Specification

FCC Rules Part 2, Section 2.1047(b)
FCC Rules Part 90, Section 90.207
Industry Canada, RSS-119 Section 6.6

5.6.2 Method of Measurement

ANSI/TIA-603-B-2002 Section 2.2.3

5.6.3 Measurement Set-Up

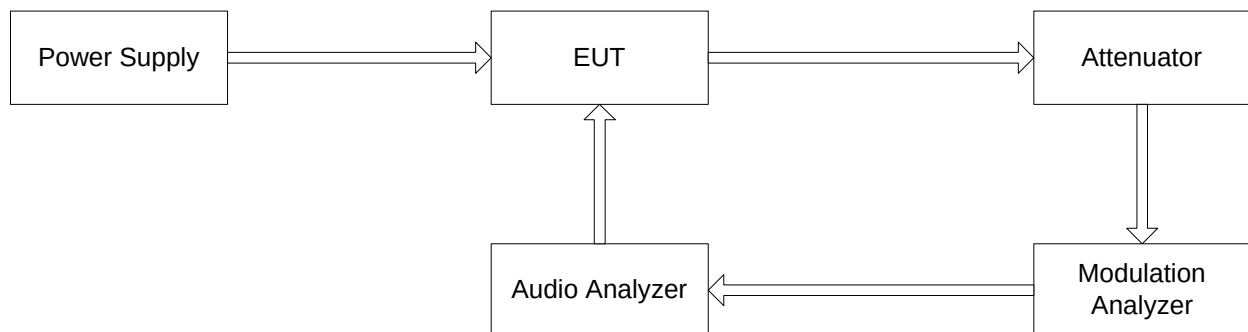


Fig.4

5.6.4 Test Equipment List

Equipment	Model Name	Manufacturer
EUT	SL7402	Maxon CIC Corp.
Power Supply	IPS-30B03DD	INTERACT
Audio Analyzer	8903B	Agilent
Modulation Analyzer	8901B	Agilent
Attenuator	33-30-33	WEINSCHTEL

5.6.5 Test Procedure

- The unit was turn-up in accordance with the alignment procedure stated in the FIG. 4, and was loaded into a 50 ohm resistive termination.
- Apply an 1kHz modulating signal to EUT from the audio frequency analyzer, and adjust the level to obtain 60% of full rated system deviation.
- Increase the level from the AF generator by ± 20 dB in one step.
- Measure the steady-state deviation.
- With the AF generator level hold constant, vary the audio frequency from 300 Hz to 3000 Hz. Record the maximum deviation.
- Set the modulation analyzer to measure the peak negative deviation and repeat the test above.

5.6.6 Test Result

5.6.6.1 Data (Narrow Band, 1st Channel)

Audio Input Level (dBmV)	Positive Peak Deviation (kHz)			Negative Peak Deviation (kHz)		
	300 Hz	1 kHz	3 kHz	300 Hz	1 kHz	3 kHz
-60	0.08	0.10	0.14	0.08	0.10	0.14
-55	0.09	0.13	0.16	0.09	0.13	0.18
-50	0.10	0.17	0.24	0.12	0.18	0.26
-45	0.10	0.24	0.37	0.12	0.25	0.40
-40	0.13	0.37	0.61	0.13	0.38	0.61
-35	0.17	0.60	1.00	0.20	0.62	1.03
-30	0.25	1.03	1.13	0.25	1.05	1.16
-25	0.37	1.64	1.17	0.38	1.65	1.20
-20	0.59	1.83	1.17	0.60	1.85	1.20
-15	0.98	1.91	1.21	0.99	1.92	1.23
-10	1.60	1.90	1.24	1.63	1.92	1.27
-5	1.68	1.90	1.25	1.70	1.93	1.28
0	2.05	1.92	1.25	2.08	1.93	1.30
+5	2.00	1.90	1.25	2.03	1.92	1.30
+10	2.04	1.89	1.25	2.08	1.90	1.30
+15	2.01	1.88	1.24	2.03	1.90	1.30
+17	2.00	1.87	1.24	2.01	1.90	1.29

5.6.6.2 Data (Narrow Band, 2nd Channel)

Audio Input Level (dBmV)	Positive Peak Deviation (kHz)			Negative Peak Deviation (kHz)		
	300 Hz	1 kHz	3 kHz	300 Hz	1 kHz	3 kHz
-60	0.08	0.10	0.14	0.08	0.10	0.14
-55	0.09	0.13	0.16	0.09	0.13	0.17
-50	0.11	0.20	0.25	0.13	0.20	0.26
-45	0.12	0.27	0.40	0.15	0.30	0.40
-40	0.15	0.40	0.68	0.15	0.44	0.70
-35	0.20	0.71	1.13	0.23	0.77	1.15
-30	0.27	1.14	1.21	0.30	1.16	1.25
-25	0.40	1.70	1.26	0.44	1.71	1.30
-20	0.62	1.91	1.27	0.68	1.93	1.30
-15	1.04	2.03	1.31	1.10	2.06	1.36
-10	1.76	2.00	1.35	1.80	2.03	1.41
-5	1.83	2.01	1.35	1.85	2.06	1.40
0	2.16	2.04	1.35	2.20	2.08	1.40
+5	2.14	2.00	1.33	2.18	2.04	1.40
+10	2.16	2.00	1.33	2.20	2.04	1.40
+15	2.15	1.97	1.30	2.20	2.00	1.40
+17	2.15	1.97	1.30	2.20	2.00	1.39

5.6.6.3 Data (Narrow Band, 3rd Channel)

Audio Input Level (dBmV)	Positive Peak Deviation (kHz)			Negative Peak Deviation (kHz)		
	300 Hz	1 kHz	3 kHz	300 Hz	1 kHz	3 kHz
-60	0.08	0.10	0.14	0.08	0.10	0.14
-55	0.09	0.14	0.16	0.09	0.13	0.18
-50	0.10	0.17	0.25	0.12	0.20	0.26
-45	0.11	0.25	0.38	0.13	0.25	0.41
-40	0.14	0.39	0.62	0.15	0.40	0.63
-35	0.18	0.63	1.04	0.22	0.63	1.03
-30	0.25	1.05	1.16	0.27	1.05	1.16
-25	0.38	1.68	1.20	0.40	1.67	1.22
-20	0.60	1.85	1.20	0.62	1.86	1.22
-15	1.00	1.94	1.23	1.01	1.94	1.25
-10	1.63	1.91	1.24	1.65	1.94	1.30
-5	1.70	1.91	1.26	1.72	1.95	1.30
0	2.08	1.94	1.26	2.10	1.95	1.33
+5	2.02	1.93	1.26	2.04	1.95	1.33
+10	2.06	1.90	1.26	2.08	1.93	1.33
+15	2.02	1.90	1.25	2.01	1.93	1.30
+17	2.00	1.89	1.26	2.00	1.93	1.30

5.6.6.4 Data (Narrow Band, 4th Channel)

Audio Input Level (dBmV)	Positive Peak Deviation (kHz)			Negative Peak Deviation (kHz)		
	300 Hz	1 kHz	3 kHz	300 Hz	1 kHz	3 kHz
-60	0.08	0.10	0.14	0.08	0.10	0.14
-55	0.09	0.13	0.16	0.09	0.13	0.17
-50	0.12	0.20	0.25	0.14	0.21	0.28
-45	0.12	0.27	0.40	0.15	0.30	0.41
-40	0.15	0.40	0.67	0.17	0.45	0.71
-35	0.20	0.70	1.12	0.24	0.75	1.13
-30	0.25	1.13	1.20	0.30	1.18	1.23
-25	0.40	1.71	1.25	0.45	1.73	1.30
-20	0.63	1.90	1.25	0.65	1.90	1.30
-15	1.03	2.02	1.28	1.11	2.05	1.35
-10	1.75	2.00	1.34	1.83	2.04	1.40
-5	1.81	2.00	1.34	1.86	2.05	1.40
0	2.15	2.03	1.34	2.19	2.07	1.40
+5	2.14	2.00	1.33	2.17	2.05	1.40
+10	2.15	2.00	1.32	2.18	2.03	1.40
+15	2.15	1.99	1.30	2.18	2.00	1.39
+17	2.15	1.98	1.30	2.18	2.00	1.40

5.6.6.5 Data (WideBand, 1st Channel)

Audio Input Level (dBmV)	Positive Peak Deviation (kHz)			Negative Peak Deviation (kHz)		
	300 Hz	1 kHz	3 kHz	300 Hz	1 kHz	3 kHz
-60	0.10	0.14	0.18	0.10	0.14	0.18
-55	0.11	0.18	0.26	0.12	0.20	0.26
-50	0.12	0.27	0.42	0.13	0.30	0.43
-45	0.15	0.41	0.69	0.17	0.43	0.71
-40	0.20	0.68	1.17	0.22	0.71	1.20
-35	0.28	1.16	1.97	0.30	1.18	2.00
-30	0.43	2.00	2.23	0.45	2.03	2.25
-25	0.68	3.25	2.32	0.70	3.30	2.35
-20	1.13	3.65	2.32	1.16	3.71	2.37
-15	1.95	3.81	2.41	1.97	3.83	2.43
-10	3.18	3.81	2.48	3.20	3.85	2.51
-5	3.70	3.82	2.49	3.73	3.86	2.53
0	4.17	3.83	2.52	4.20	3.87	2.55
+5	4.15	3.84	2.50	4.19	3.90	2.53
+10	4.20	3.81	2.50	4.23	3.88	2.52
+15	4.22	3.83	2.50	4.23	3.90	2.53
+17	4.24	3.83	2.50	4.26	3.88	2.50

5.6.6.6 Data (WideBand, 2nd Channel)

Audio Input Level (dBmV)	Positive Peak Deviation (kHz)			Negative Peak Deviation (kHz)		
	300 Hz	1 kHz	3 kHz	300 Hz	1 kHz	3 kHz
-60	0.08	0.14	0.18	0.08	0.14	0.18
-55	0.12	0.18	0.28	0.12	0.18	0.28
-50	0.13	0.28	0.45	0.13	0.27	0.45
-45	0.17	0.43	0.73	0.17	0.44	0.75
-40	0.21	0.73	1.23	0.20	0.75	1.25
-35	0.31	1.21	2.02	0.33	1.25	2.02
-30	0.45	2.10	2.30	0.47	2.13	2.30
-25	0.70	3.33	2.35	0.71	3.35	2.36
-20	1.15	3.70	2.35	1.20	3.71	2.36
-15	2.00	3.85	2.44	2.04	3.90	2.47
-10	3.20	3.86	2.51	3.25	3.91	2.53
-5	3.74	3.88	2.55	3.80	3.93	2.58
0	4.21	3.89	2.56	4.25	3.93	2.58
+5	4.21	3.91	2.50	4.25	3.95	2.55
+10	4.25	3.88	2.50	4.30	3.90	2.53
+15	4.27	3.89	2.50	4.31	3.90	2.53
+17	4.28	3.90	2.48	4.30	3.92	2.50

5.6.6.7 Data (WideBand, 3rd Channel)


Audio Input Level (dBmV)	Positive Peak Deviation (kHz)			Negative Peak Deviation (kHz)		
	300 Hz	1 kHz	3 kHz	300 Hz	1 kHz	3 kHz
-60	0.10	0.14	0.18	0.10	0.14	0.18
-55	0.11	0.18	0.26	0.12	0.20	0.26
-50	0.12	0.27	0.44	0.14	0.30	0.43
-45	0.15	0.40	0.70	0.17	0.45	0.71
-40	0.20	0.68	1.18	0.21	0.73	1.20
-35	0.28	1.18	2.25	0.30	1.20	2.01
-30	0.43	2.00	2.33	0.44	2.00	2.26
-25	0.69	3.25	2.33	0.71	3.31	2.36
-20	1.15	3.66	2.34	1.18	3.73	2.38
-15	1.95	3.82	2.43	2.00	3.85	2.45
-10	3.19	3.82	2.50	3.21	3.86	2.52
-5	3.71	3.82	2.50	3.74	3.87	2.53
0	4.15	3.85	2.53	4.21	3.87	2.55
+5	4.15	3.85	2.51	4.21	3.91	2.55
+10	4.20	3.83	2.51	4.22	3.90	2.54
+15	4.21	3.83	2.51	4.23	3.93	2.54
+17	4.23	3.83	2.50	4.25	3.92	2.54

5.6.6.8 Data (WideBand, 4th Channel)


Audio Input Level (dBmV)	Positive Peak Deviation (kHz)			Negative Peak Deviation (kHz)		
	300 Hz	1 kHz	3 kHz	300 Hz	1 kHz	3 kHz
-60	0.08	0.14	0.18	0.08	0.14	0.18
-55	0.13	0.18	0.28	0.12	0.18	0.28
-50	0.14	0.28	0.44	0.13	0.27	0.43
-45	0.17	0.44	0.72	0.18	0.45	0.76
-40	0.20	0.71	1.23	0.20	0.74	1.23
-35	0.30	1.20	2.00	0.32	1.23	2.04
-30	0.44	2.08	2.28	0.46	2.11	2.31
-25	0.70	3.31	2.33	0.70	3.37	2.35
-20	1.16	3.70	2.34	1.18	3.70	2.35
-15	2.03	3.83	2.45	2.02	3.89	2.50
-10	3.21	3.85	2.50	3.23	3.90	2.55
-5	3.75	3.87	2.55	3.78	3.91	2.59
0	4.22	3.88	2.55	4.27	3.93	2.61
+5	4.22	3.90	2.52	4.28	3.95	2.57
+10	4.25	3.89	2.50	4.31	3.94	2.55
+15	4.26	3.89	2.50	4.32	3.92	2.55
+17	4.26	3.88	2.50	4.32	3.92	2.55

5.6.7 Graph


5.6.7.1 Narrow Band, 1st Channel, Positive

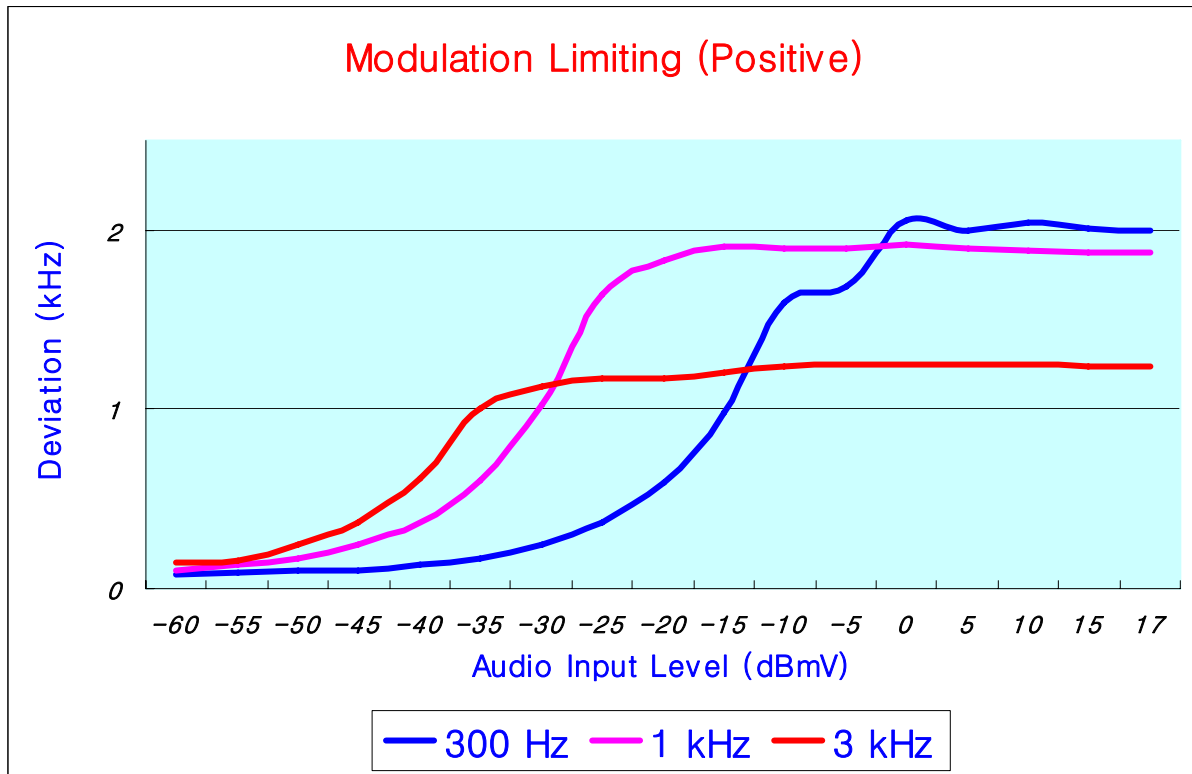


5.6.7.2 Narrow Band, 1st Channel, Negative

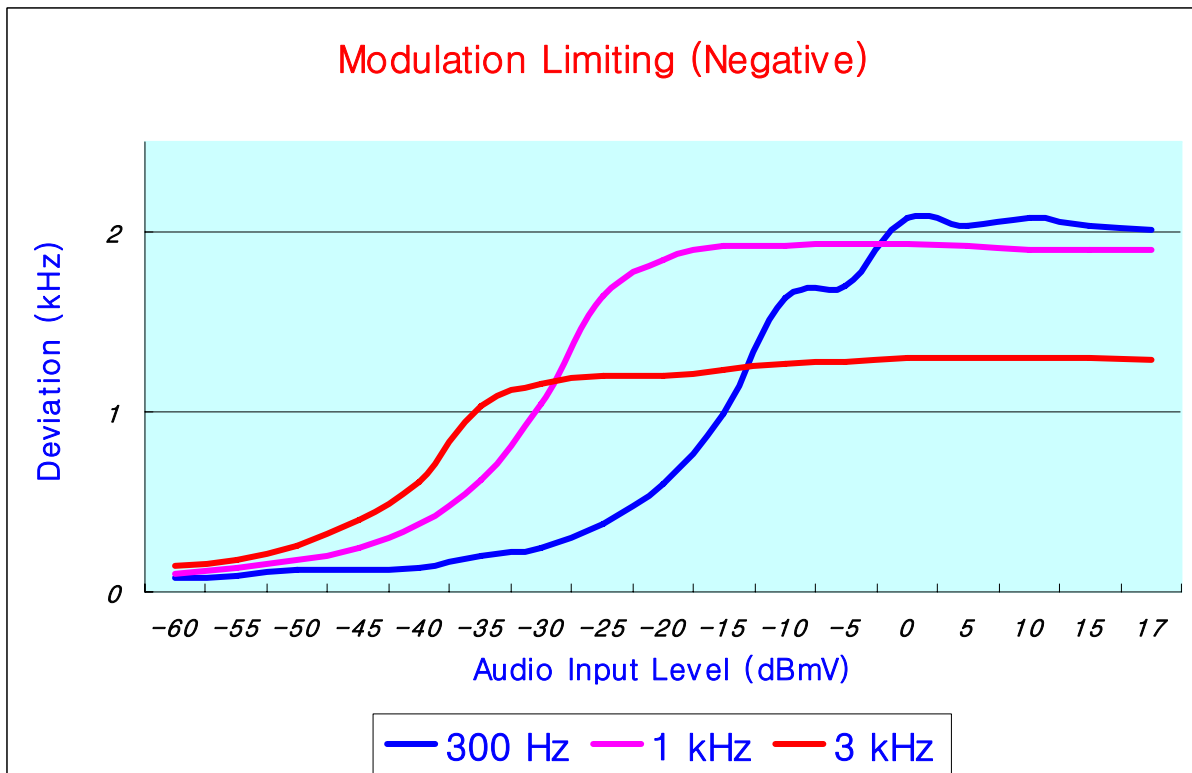


5.6.7.3 Narrow Band, 2nd Channel, Positive

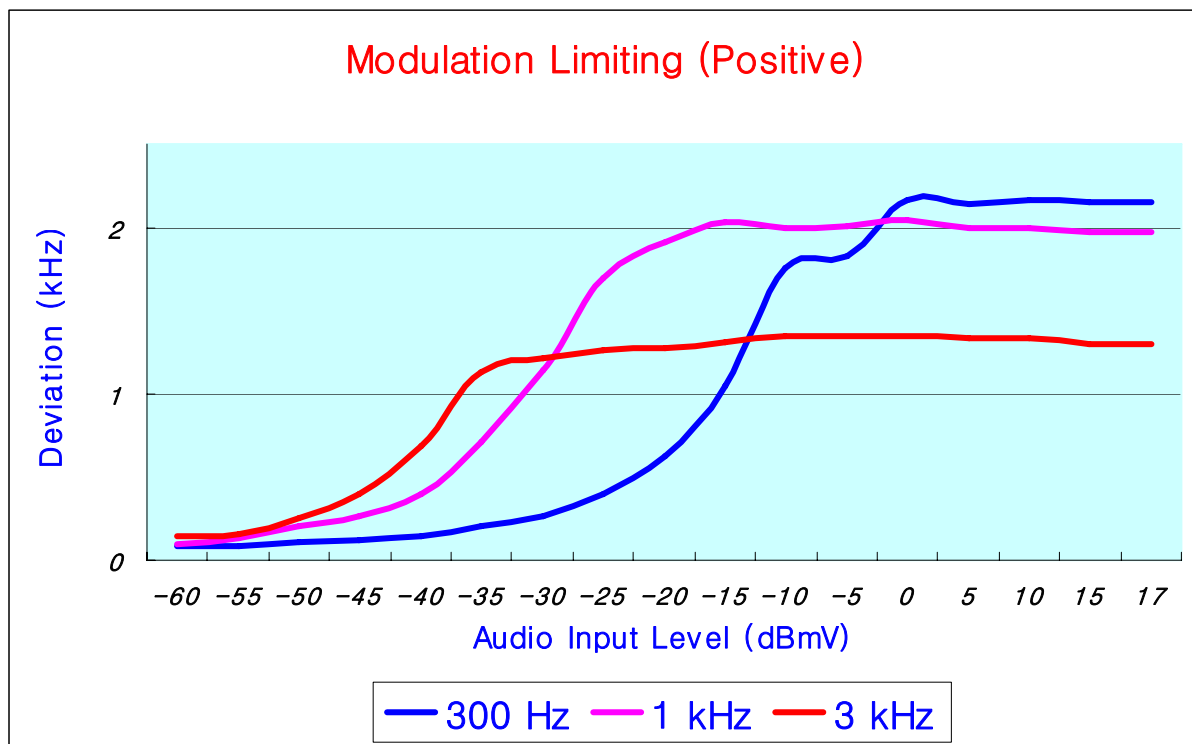


5.6.7.4 Narrow Band, 2nd Channel, Negative

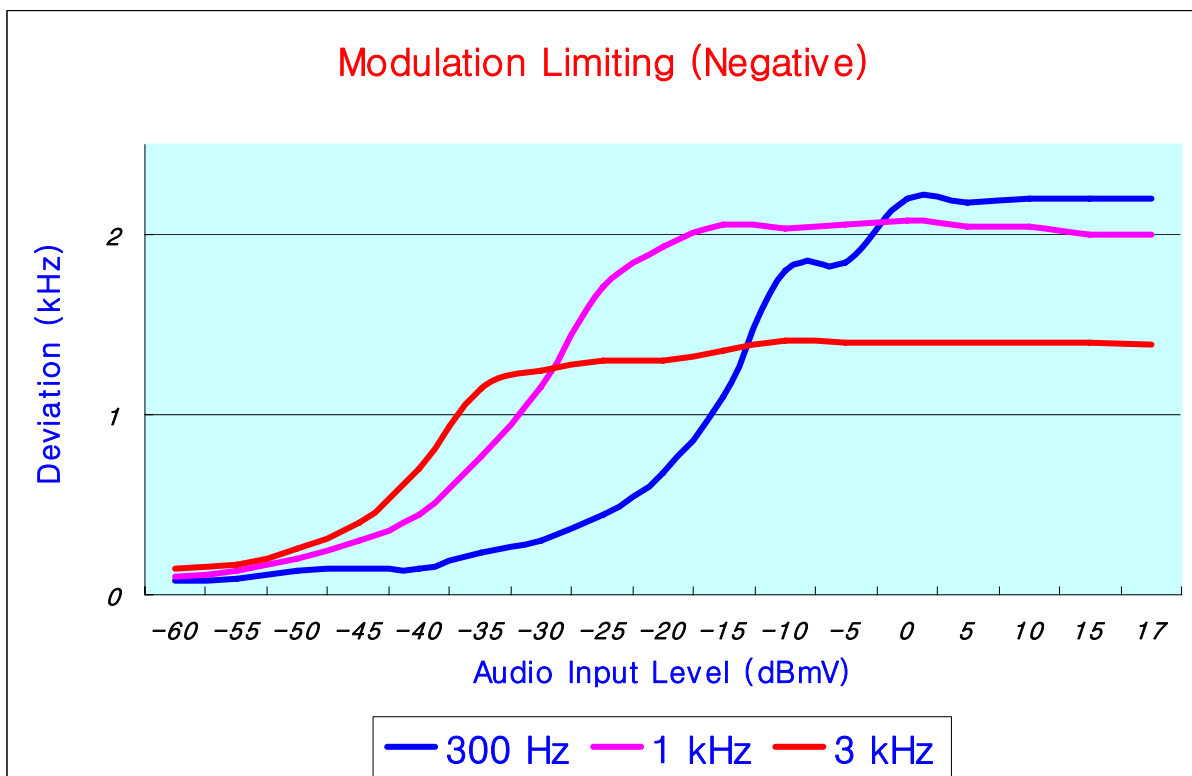


5.6.7.5 Narrow Band, 3rd Channel, Positive

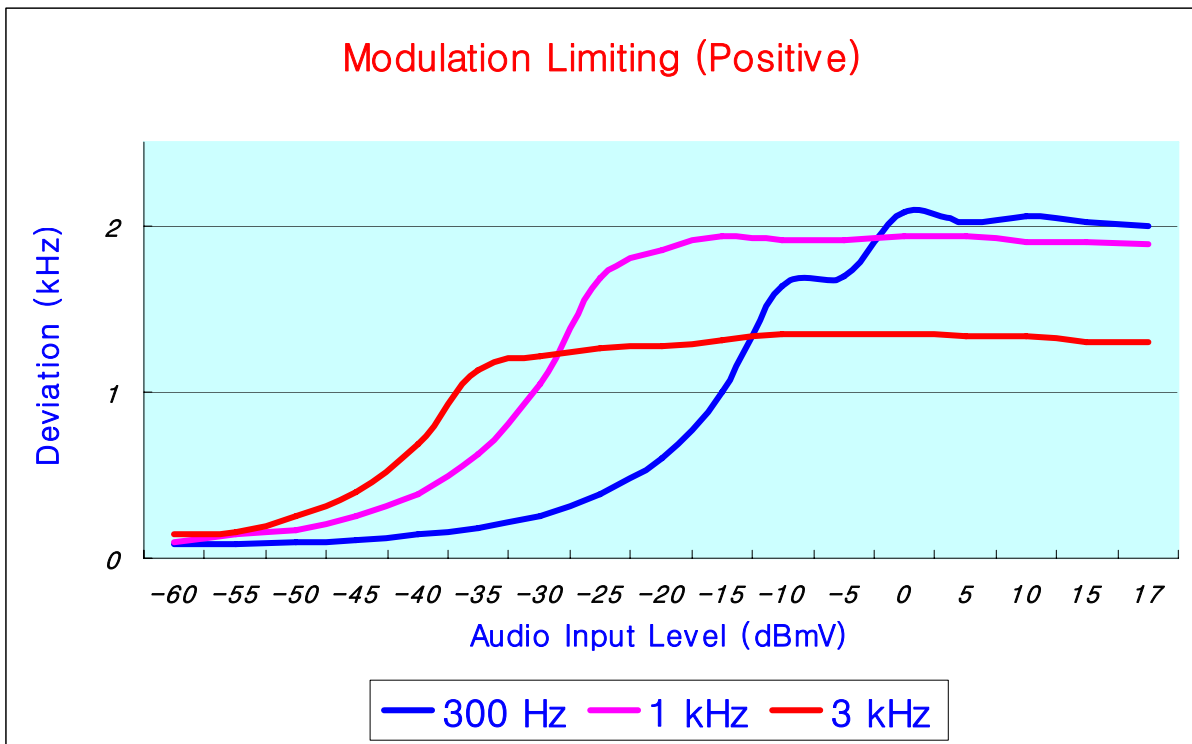


5.6.7.6 Narrow Band, 3rd Channel, Negative

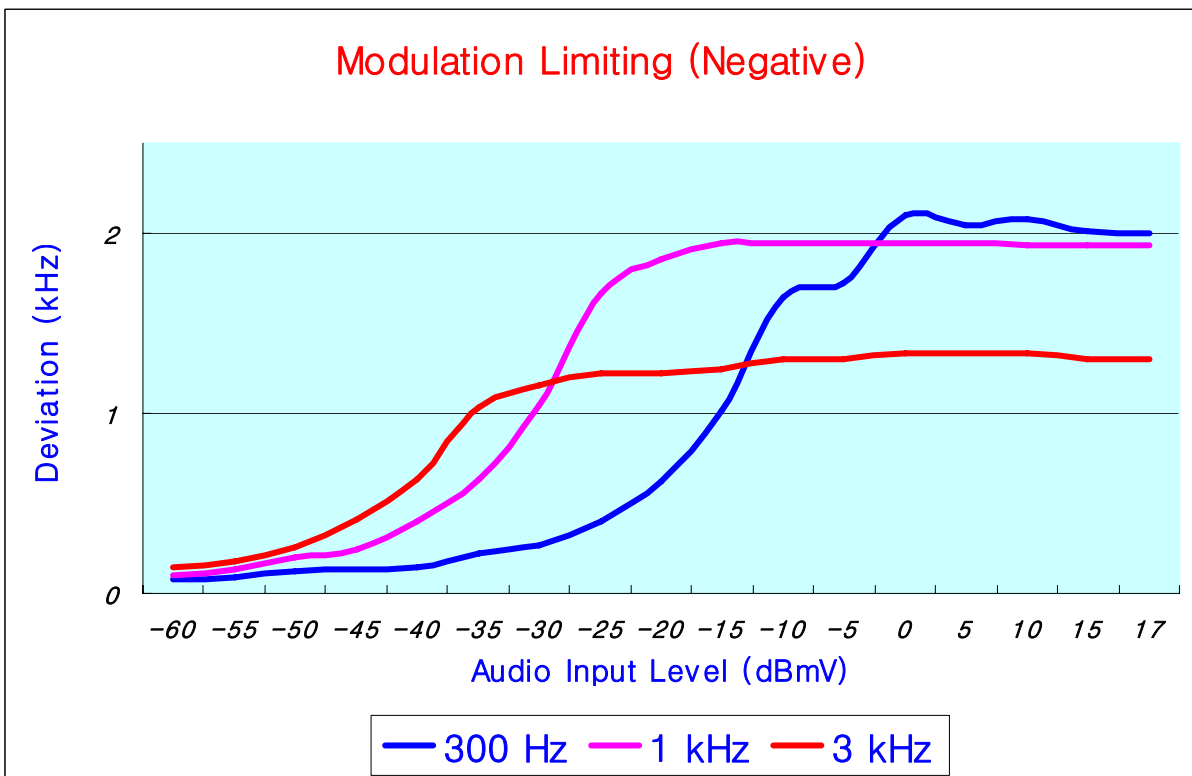


5.6.7.7 Narrow Band, 4th Channel, Positive

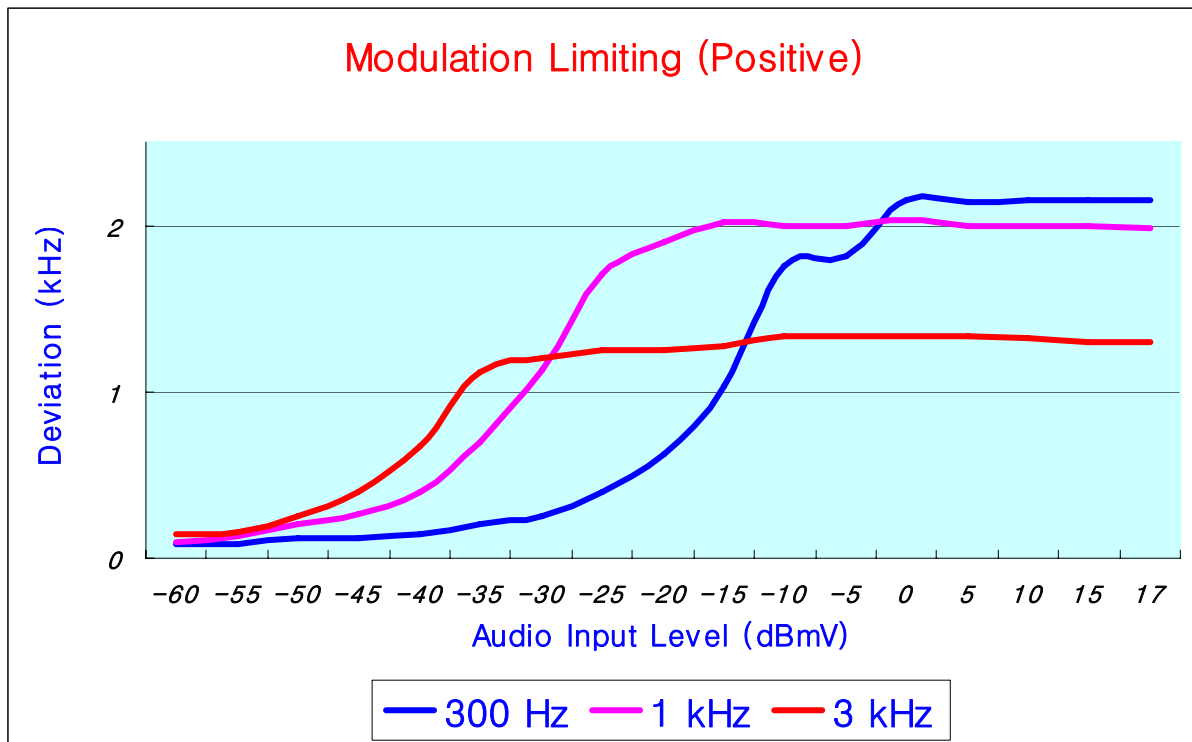


5.6.7.8 Narrow Band, 4th Channel, Negative

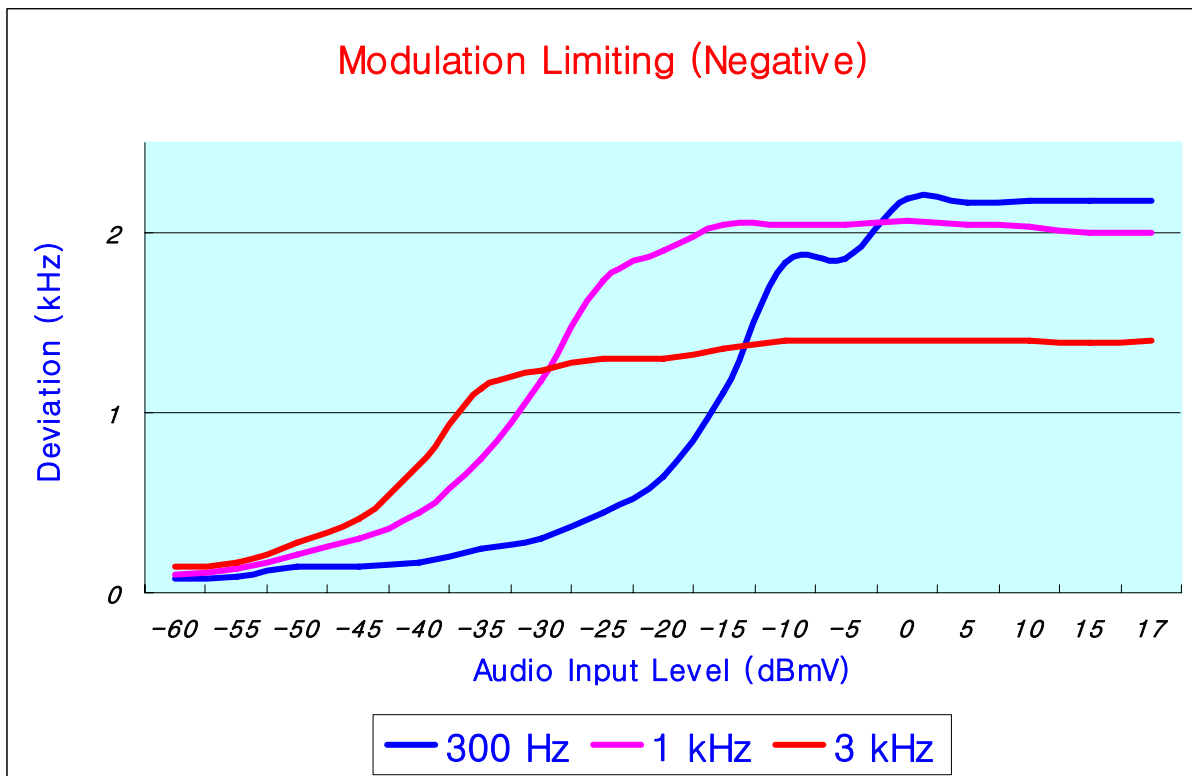


5.6.8.9 WideBand, 1st Channel, Positive

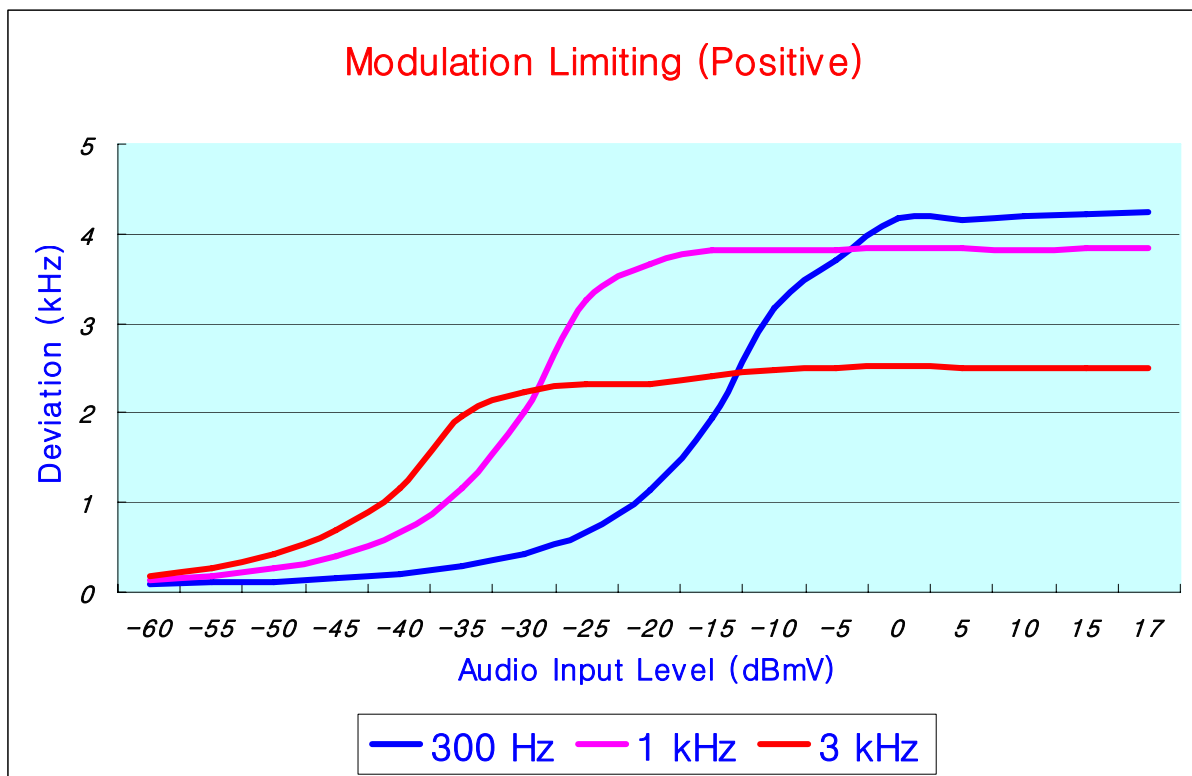


5.6.8.10 WideBand, 1st Channel, Negative

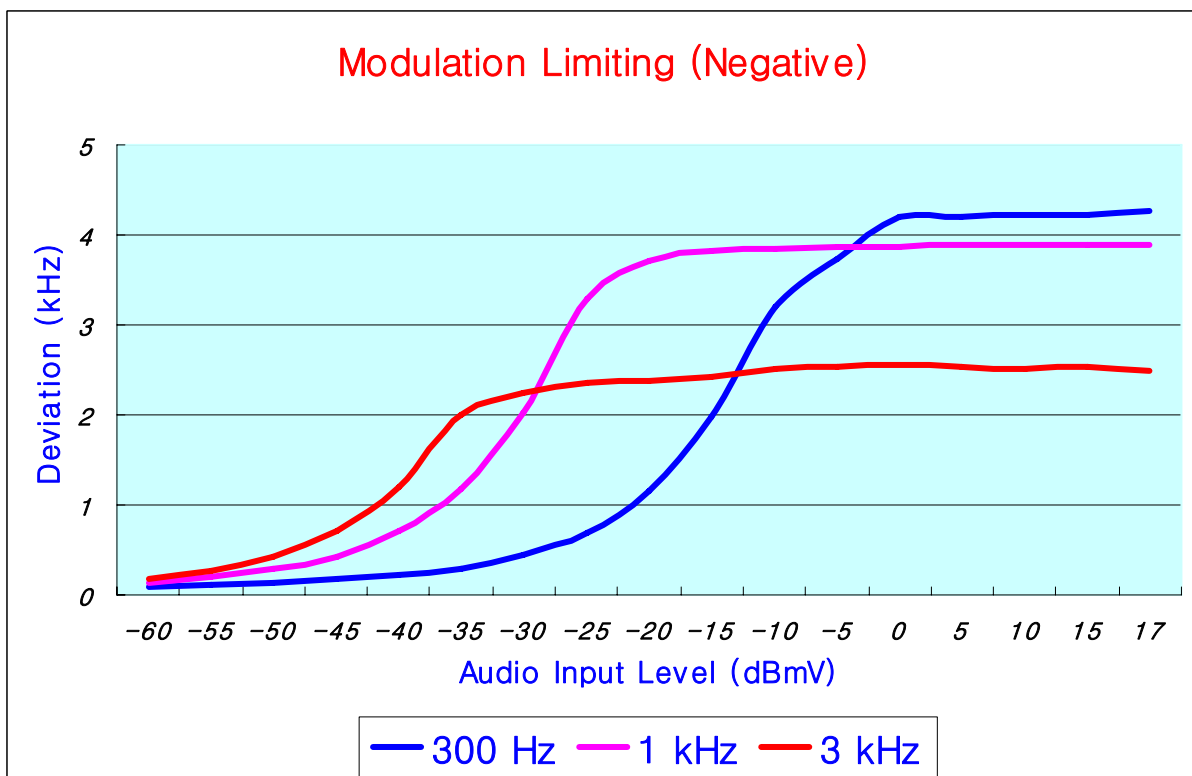


5.6.8.11 WideBand, 2nd Channel, Positive

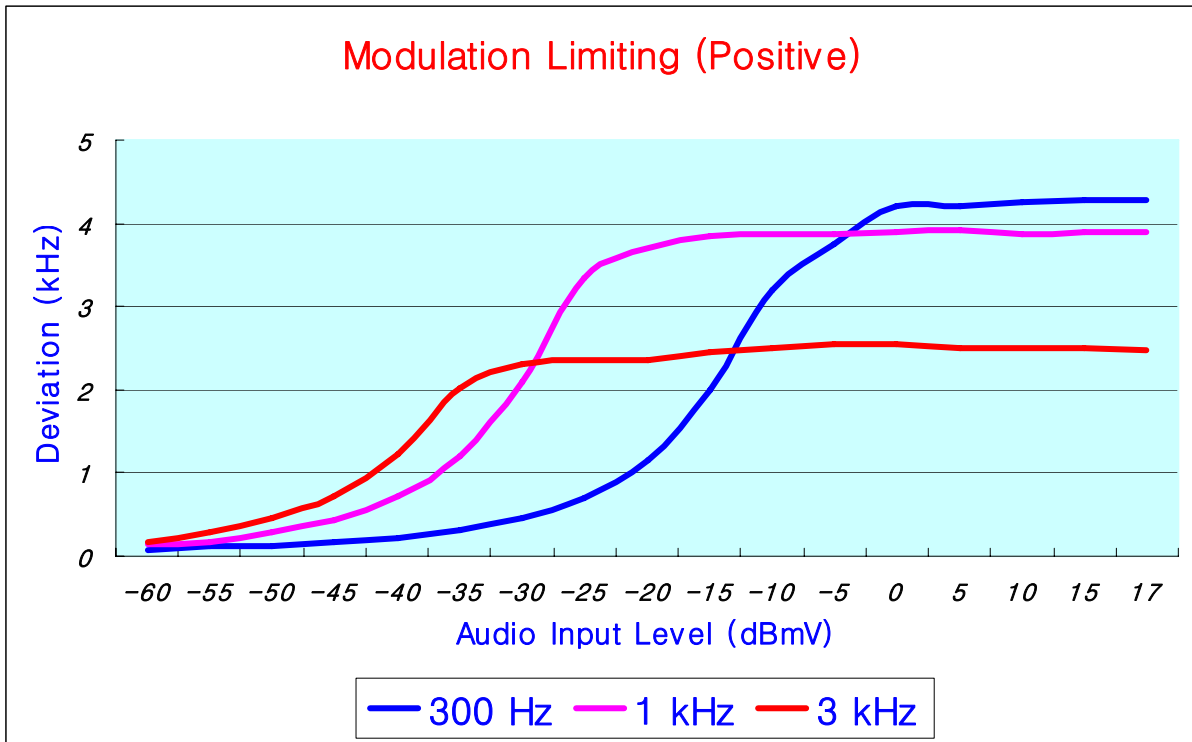


5.6.8.12 WideBand, 2nd Channel, Negative

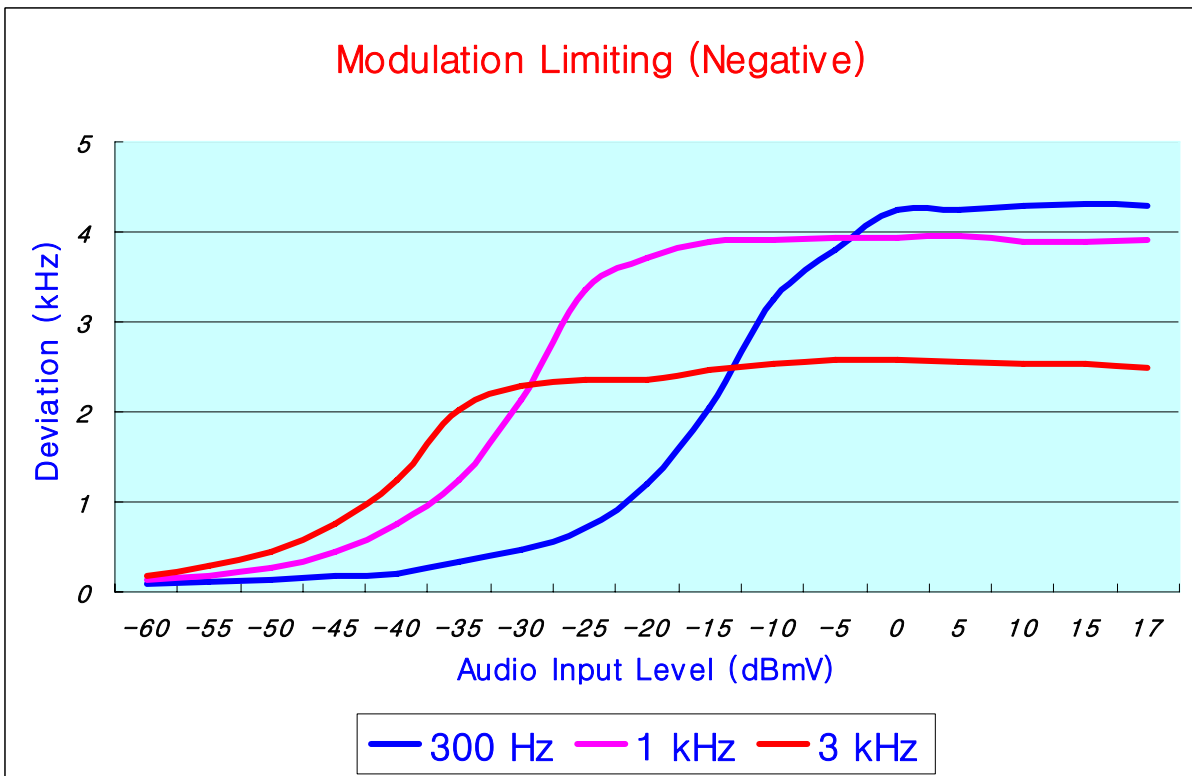


5.6.8.13 WideBand, 3rd Channel, Positive

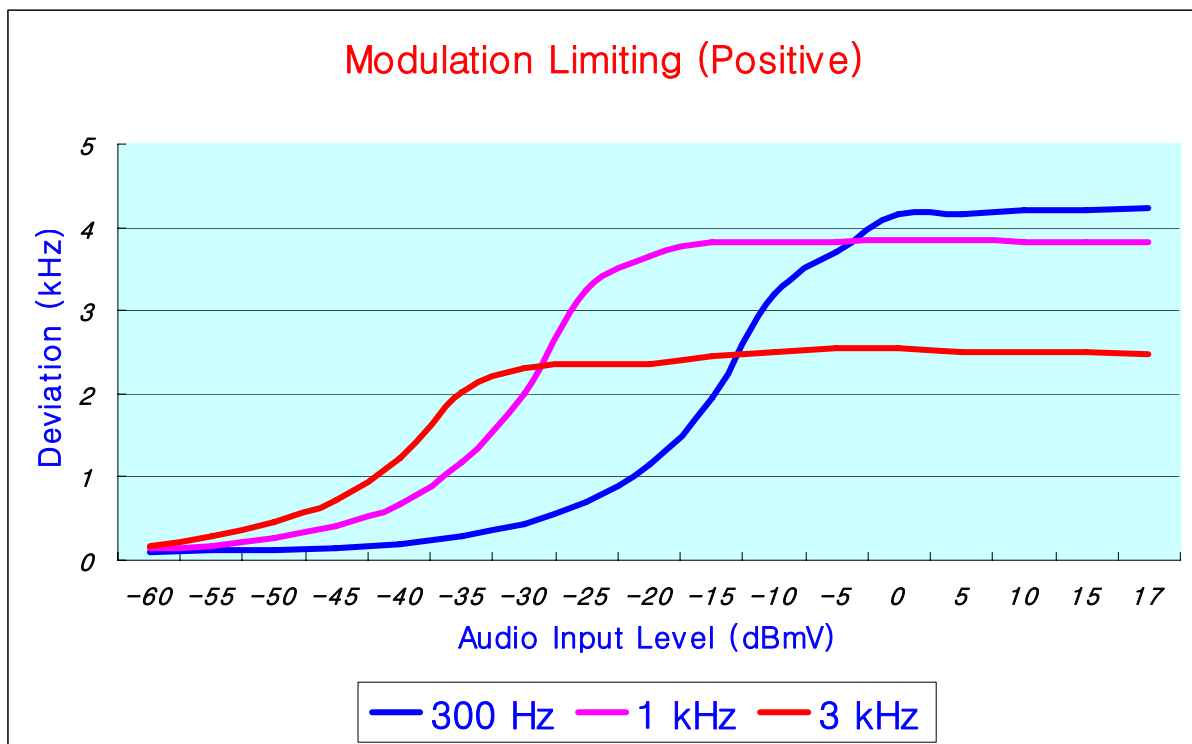


5.6.8.14 WideBand, 3rd Channel, Negative

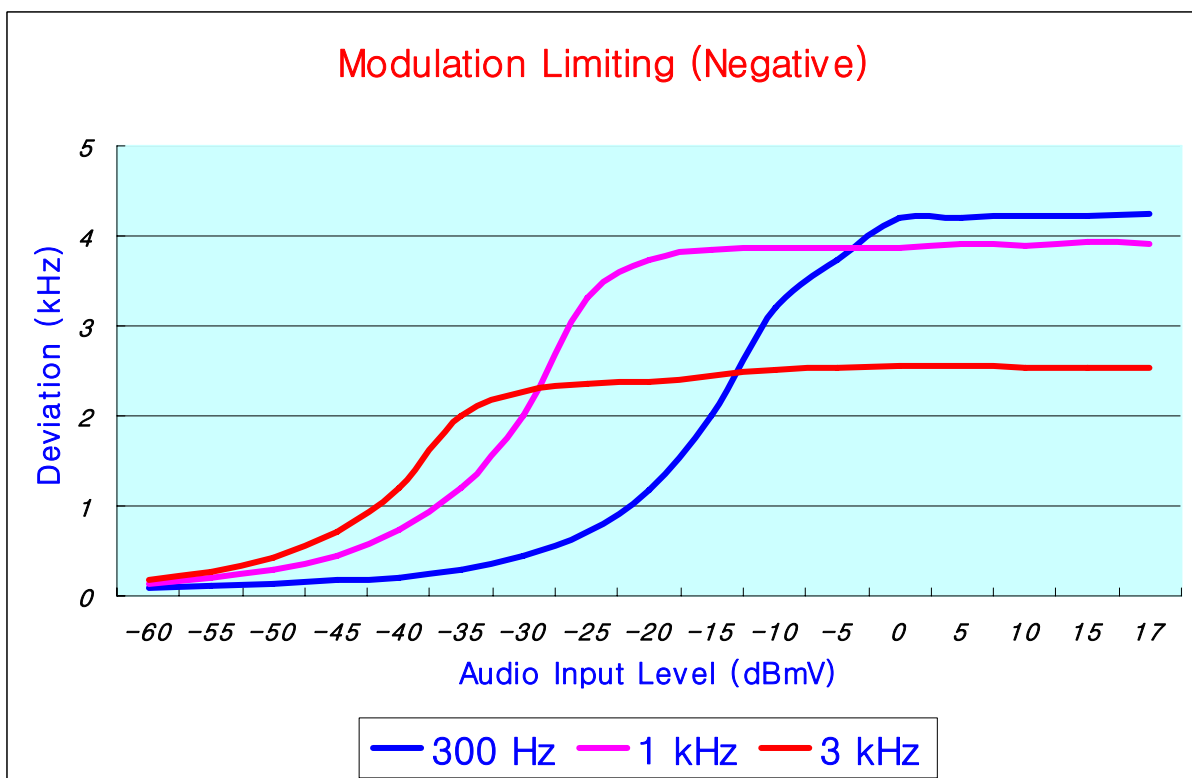

5.6.8.15 WideBand, 4th Channel, Positive

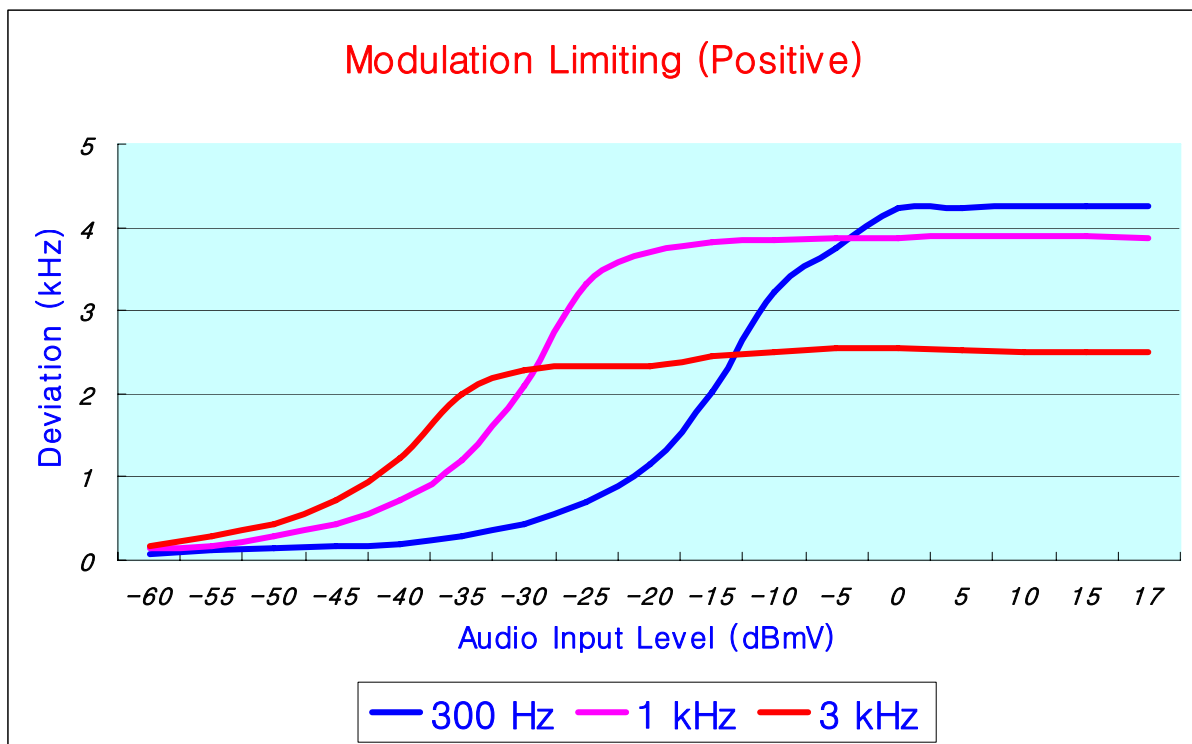

5.6.8.14 WideBand, 4th Channel, Negative

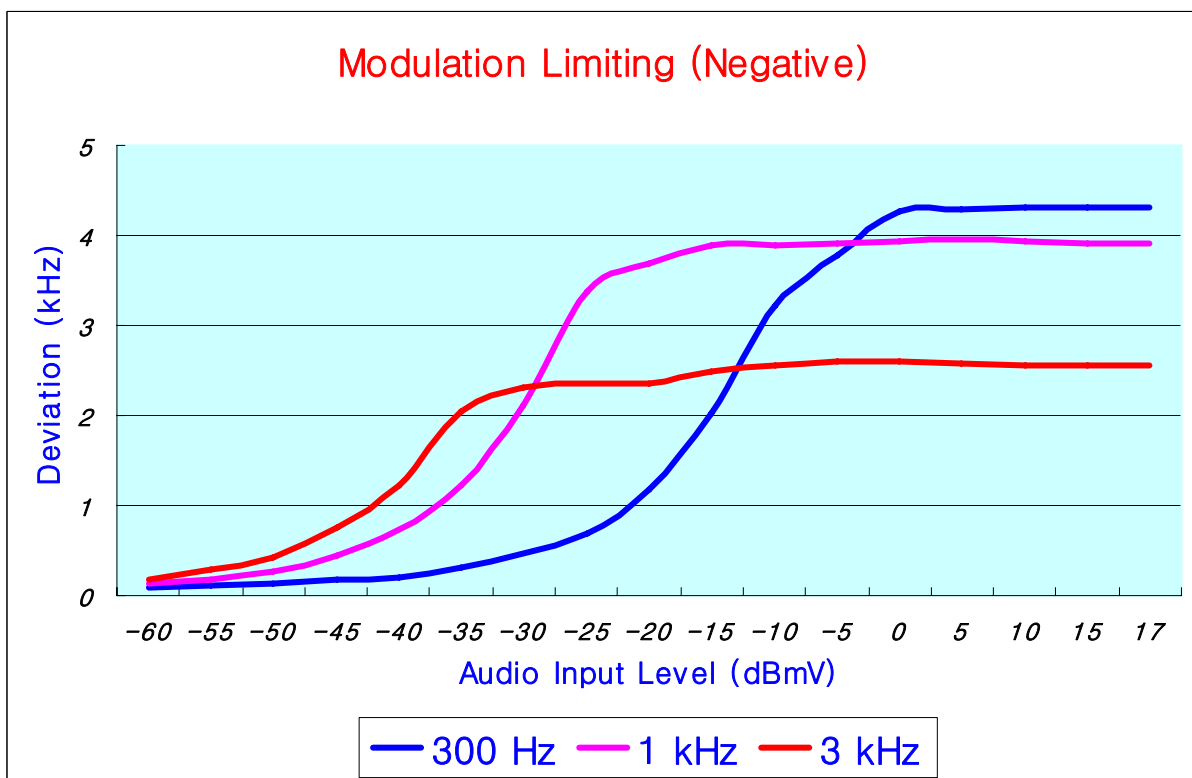

5.7 Occupied Bandwidth

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission. Specified limits according to the emission mask per section 90.210 is as below.

Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
- (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 per-cent of the authorized bandwidth: At least 35 dB.
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized band-width: At least $43 + 10 \log (P)$ dB.

Emission Mask D. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(f_d - 2.88 \text{ kHz})$ dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.

5.7.1 Specification

FCC Rules Part 2, Section 2.1049
FCC Rules Part 90, Section 90.210
Industry Canada, RSS-119 Section 6.4

5.7.2 Method of Measurement

ANSI/TIA-603-B-2002 Section 2.2.11

5.7.3 Measurement Set-Up

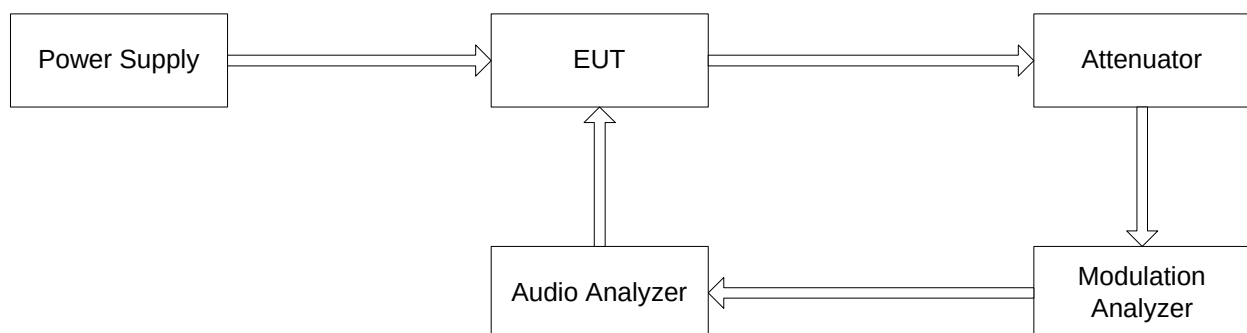


Fig.5

5.7.4 Test Equipment List

Equipment	Model Name	Manufacturer
EUT	SL7402	Maxon CIC Corp.
Power Supply	IPS-30B03DD	INTERACT
Audio Analyzer	8903B	Agilent
Spectrum Analyzer	FSP7	Rohde & Shwarz
Attenuator	33-30-33	WEINSCHL

5.7.5 Measurement Procedure

- The unit was turn-up in accordance with the alignment procedure stated in the FIG. 5 , and was loaded into a 50 ohm resistive termination.
- The radio transmitter was modulated by a 2500 Hz tone at an input level 16 dB greater than that necessary to produce 50 percent modulation. The input level shall be established at the frequency of maximum response of the audio modulating circuit.
- The occupied bandwidth data is obtained for 25kHz and 12.5 kHz channel bandwidth.


5.7.6 Data

Frequency (MHz)	Channel Spacing	Applicable Emission Mask	99% Bandwidth (kHz)	Maximum Authorized Bandwidth (KHz)
400.025 MHz	Narrow	D	6.7	11.25
	Wide	B	11.2	20.00
423.025 MHz	Narrow	D	6.8	11.25
	Wide	B	11.3	20.00
446.025 MHz	Narrow	D	6.8	11.25
	Wide	B	11.3	20.00
469.975 MHz	Narrow	D	7.0	11.25
	Wide	B	11.3	20.00

5.7.6 99% Bandwidth

5.7.6.1 Plot 1

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 6.4
Operating Frequency :	400.025 MHz
Channel :	1st Channel
Power Output :	4 Watts
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	99% Bandwidth
Reference Voltage :	7.4 VDC

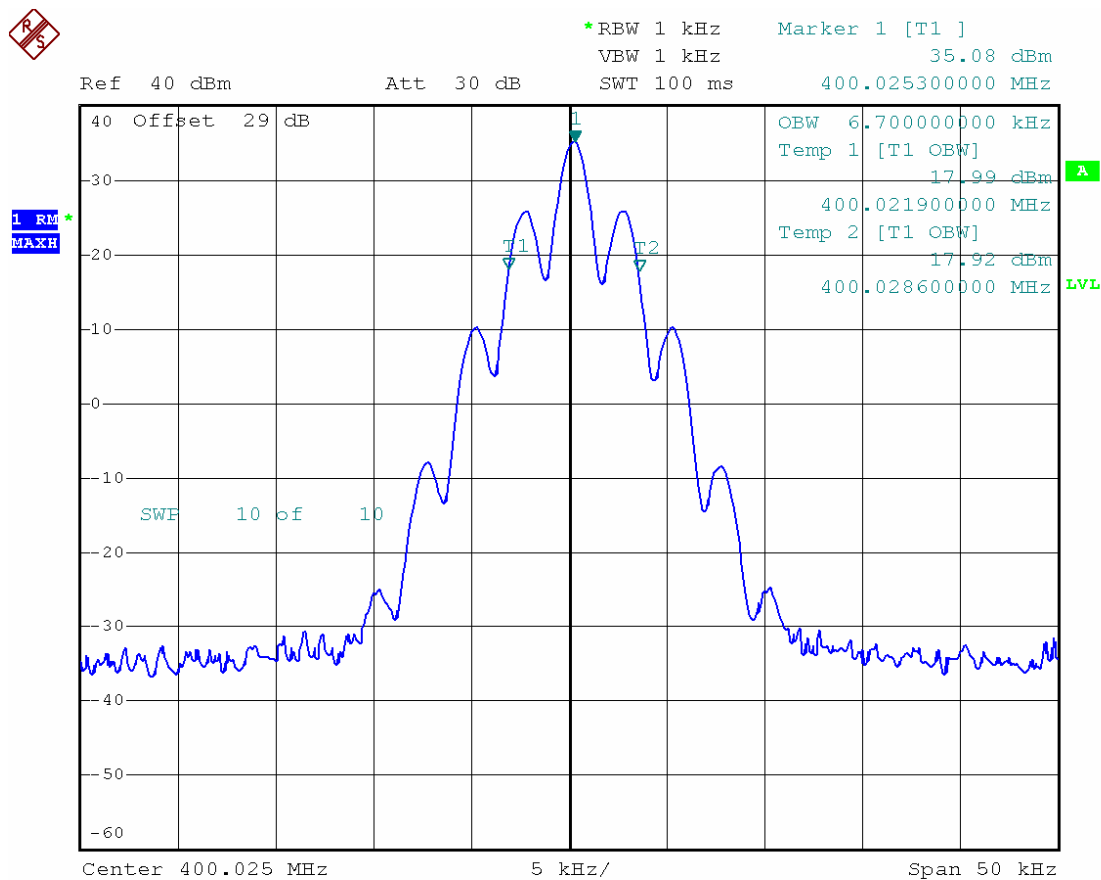


SL7402 / MaxonCIC

Date: 21.DEC.2007 10:20:17

5.7.6.2 Plot 2

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 6.4
Operating Frequency :	400.025 MHz
Channel :	1st Channel
Power Output :	4 Watts
Channel Spacing :	WideBand
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	99% Bandwidth
Reference Voltage :	7.4 VDC

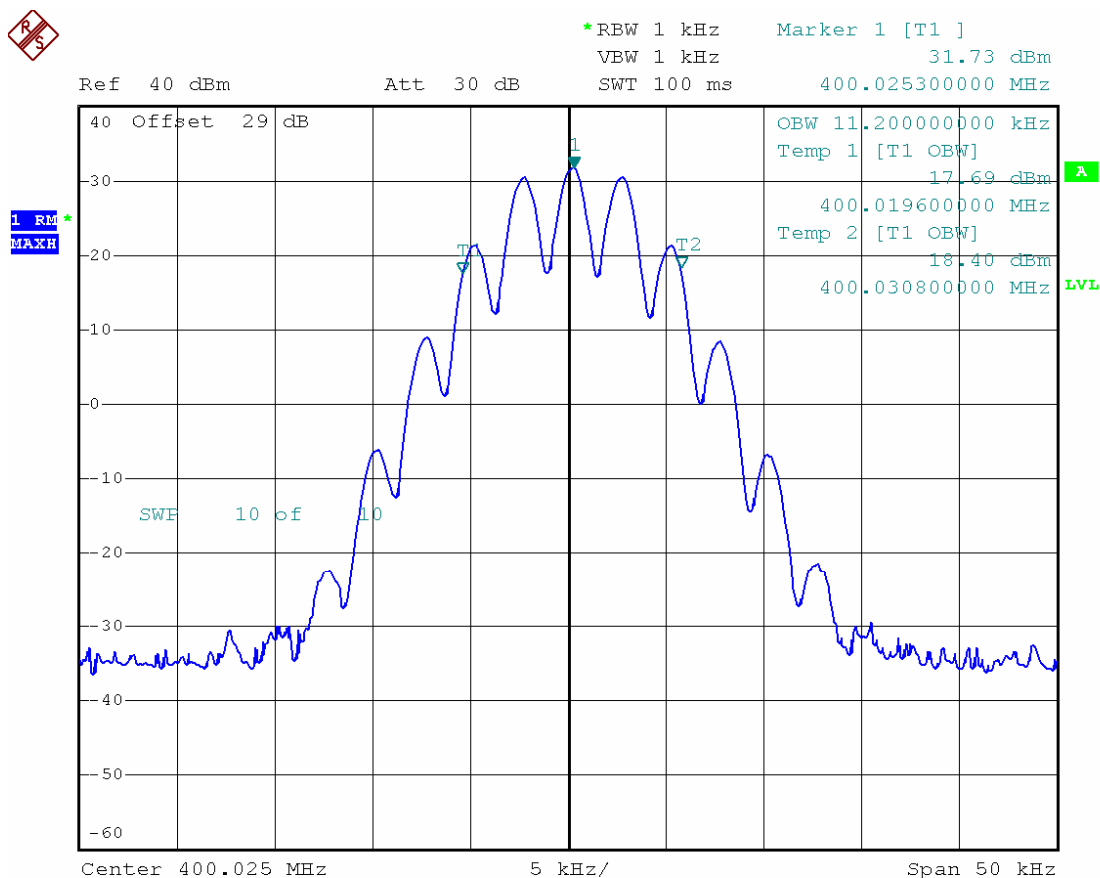


SL7402 / MaxonCIC

Date: 21.DEC.2007 10:20:42

5.7.6.3 Plot 3

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 6.4
Operating Frequency :	423.025 MHz
Channel :	2nd Channel
Power Output :	4 Watts
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	99% Bandwidth
Reference Voltage :	7.4 VDC

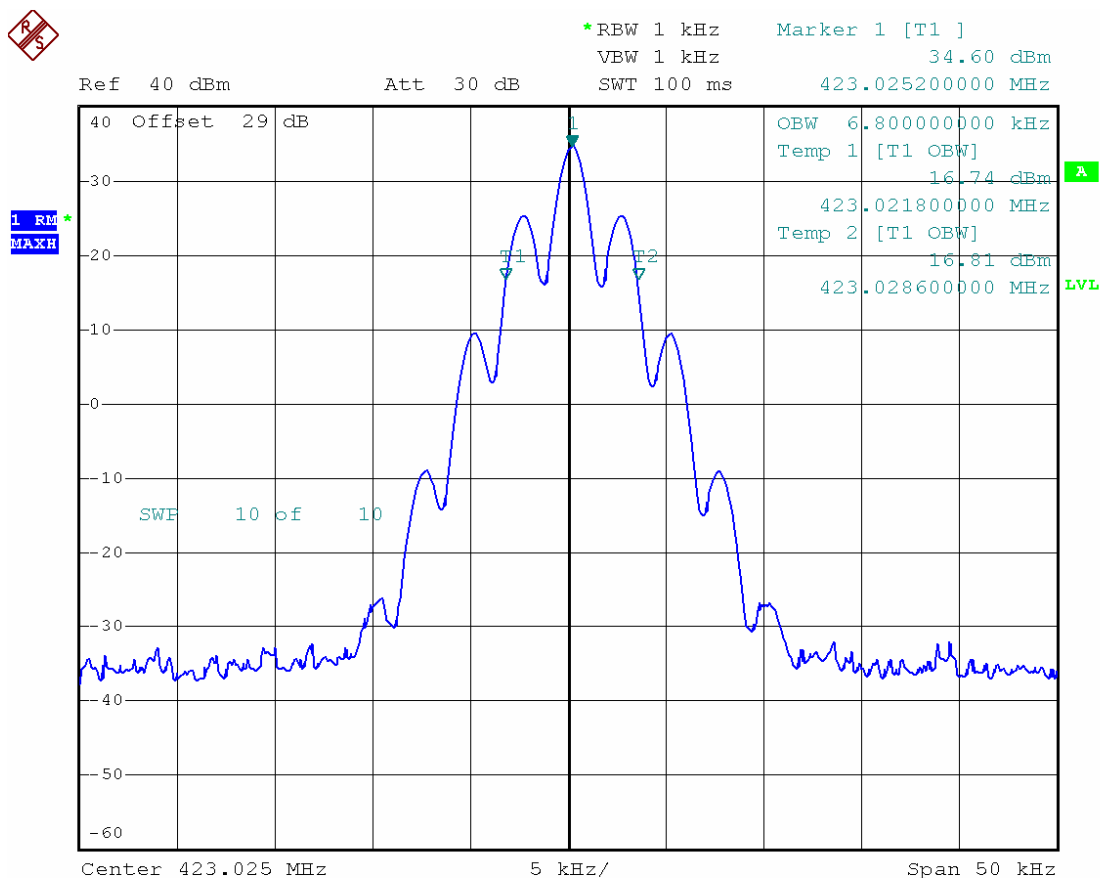


SL7402 / MaxonCIC

Date: 21.DEC.2007 10:25:53

5.7.6.4 Plot 4

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 6.4
Operating Frequency :	423.025 MHz
Channel :	2nd Channel
Power Output :	4 Watts
Channel Spacing :	WideBand
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	99% Bandwidth
Reference Voltage :	7.4 VDC

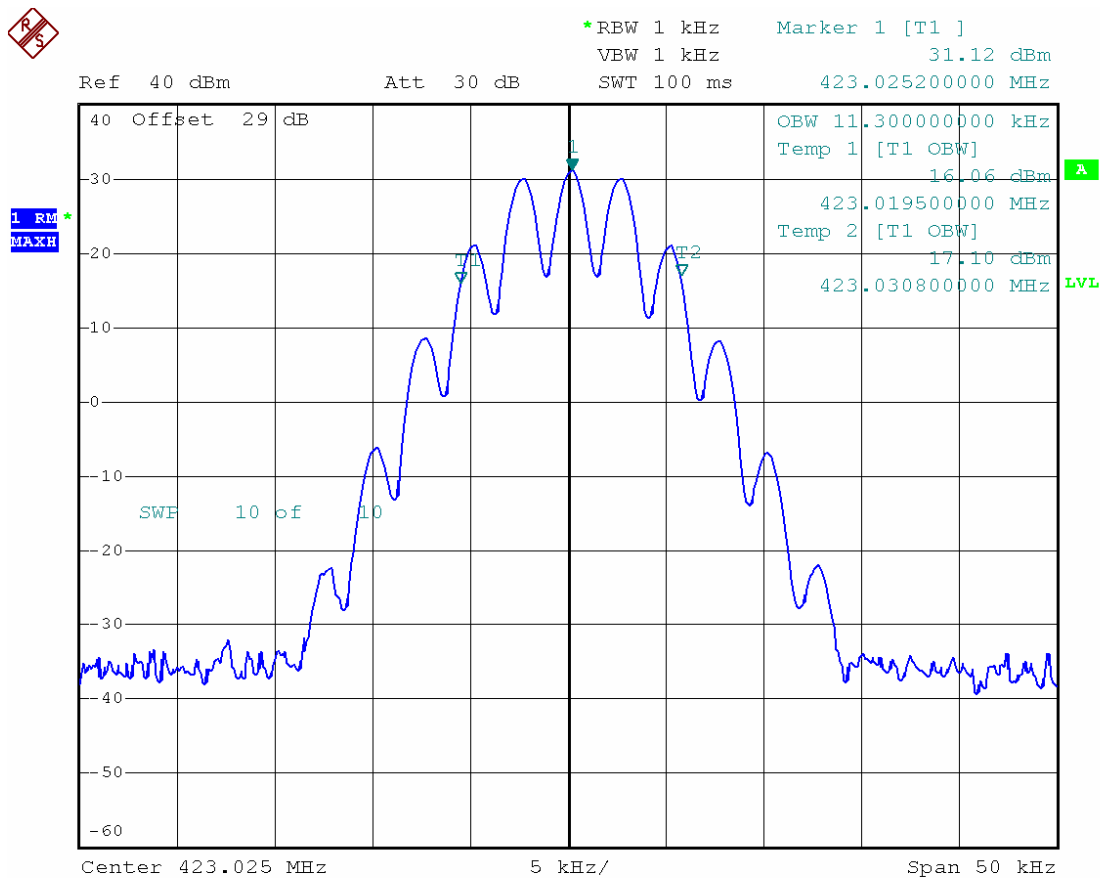


SL7402 / MaxonCIC

Date: 21.DEC.2007 10:27:12

5.7.6.5 Plot 5

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 6.4
Operating Frequency :	446.025 MHz
Channel :	3rd Channel
Power Output :	4 Watts
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	99% Bandwidth
Reference Voltage :	7.4 VDC

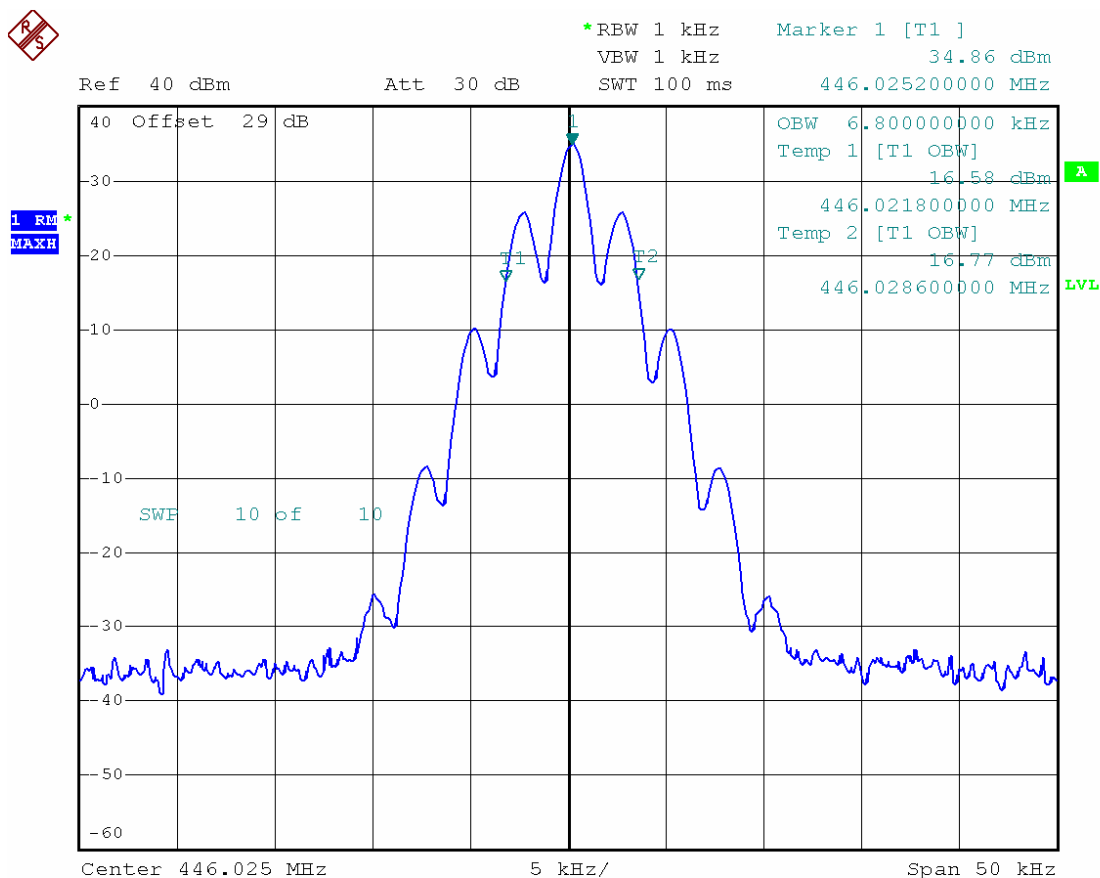


SL7402 / MaxonCIC

Date: 21.DEC.2007 10:27:47

5.7.6.6 Plot 6

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 6.4
Operating Frequency :	446.025 MHz
Channel :	3rd Channel
Power Output :	4 Watts
Channel Spacing :	WideBand
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	99% Bandwidth
Reference Voltage :	7.4 VDC

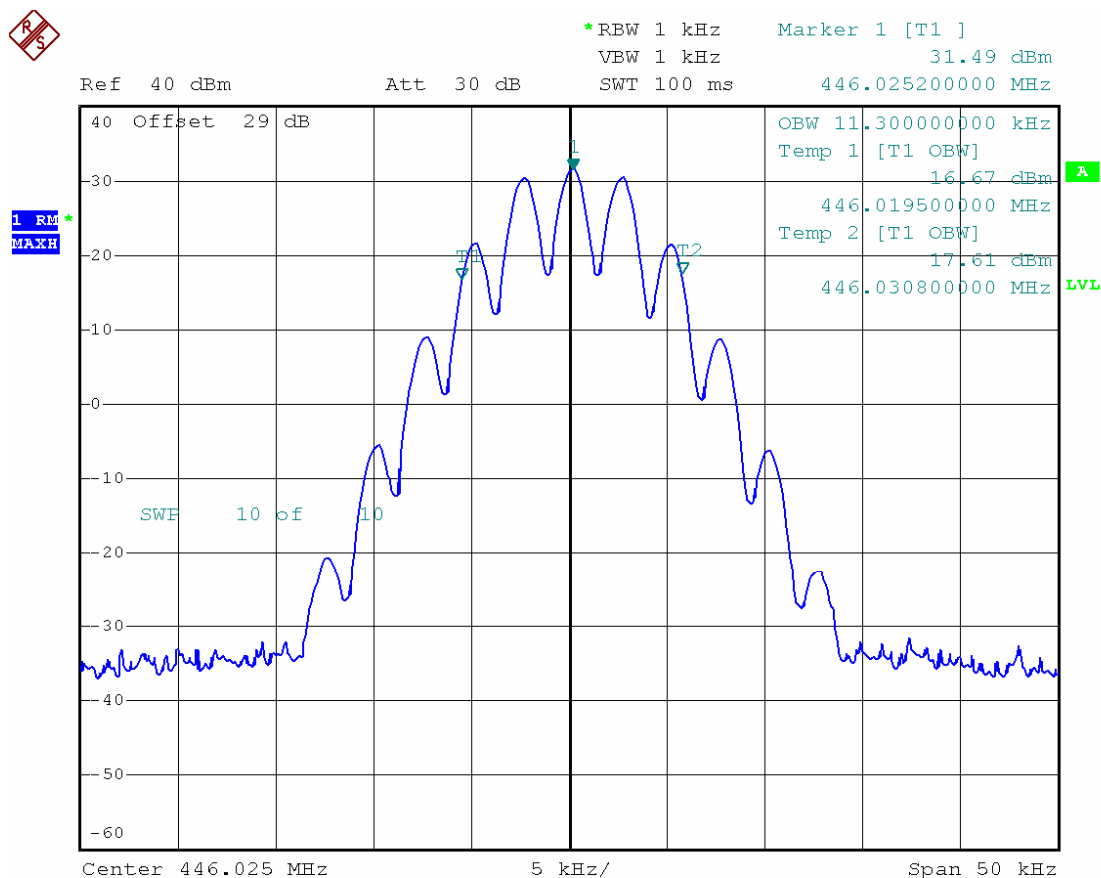


SL7402 / MaxonCIC

Date: 21.DEC.2007 10:28:52

5.7.6.7 Plot 7

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 6.4
Operating Frequency :	469.975 MHz
Channel :	4th Channel
Power Output :	4 Watts
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	99% Bandwidth
Reference Voltage :	7.4 VDC

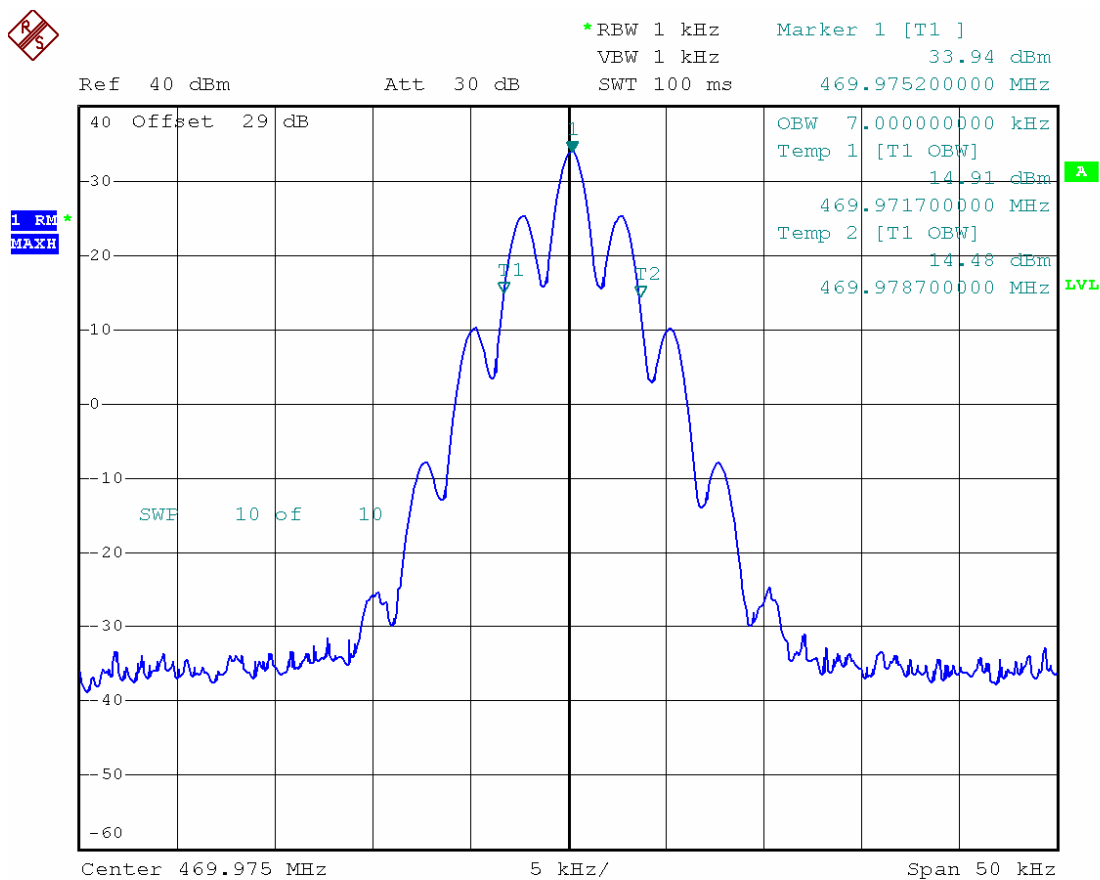


SL7402 / MaxonCIC

Date: 21.DEC.2007 10:32:09

5.7.6.2 Plot 8

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 6.4
Operating Frequency :	469.975 MHz
Channel :	4th Channel
Power Output :	4 Watts
Channel Spacing :	WideBand
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	99% Bandwidth
Reference Voltage :	7.4 VDC

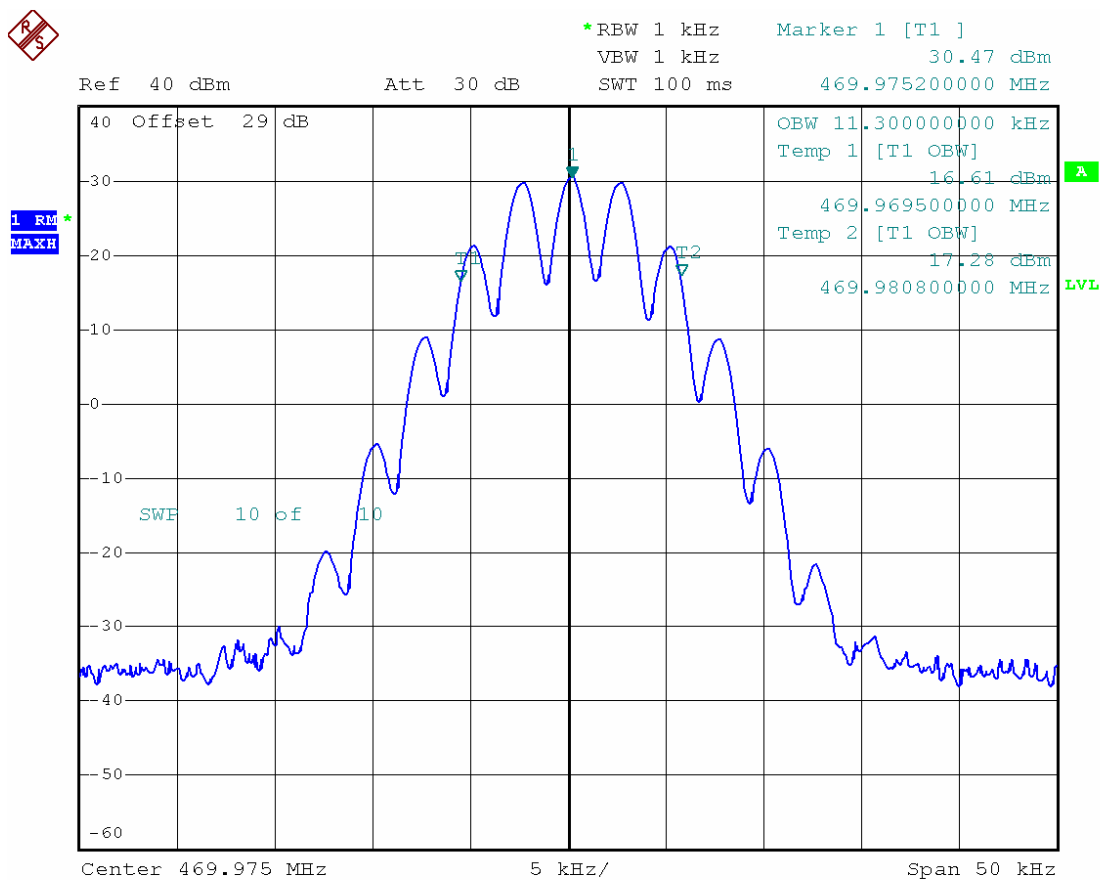

SL7402 / MaxonCIC

Date: 21.DEC.2007 10:32:27

5.7.7 Emission Mask


5.5.7.1 Plot 1

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 6.4
Operating Frequency :	400.025 MHz
Channel :	1st Channel
Power Output :	4 Watts
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask D
Reference Voltage :	7.4 VDC



SL7402 / MaxonCIC


*RBW 300 Hz Marker 1 [T1]
*VBW 300 Hz 35.11 dBm
SWT 900 ms 400.025080000 MHz

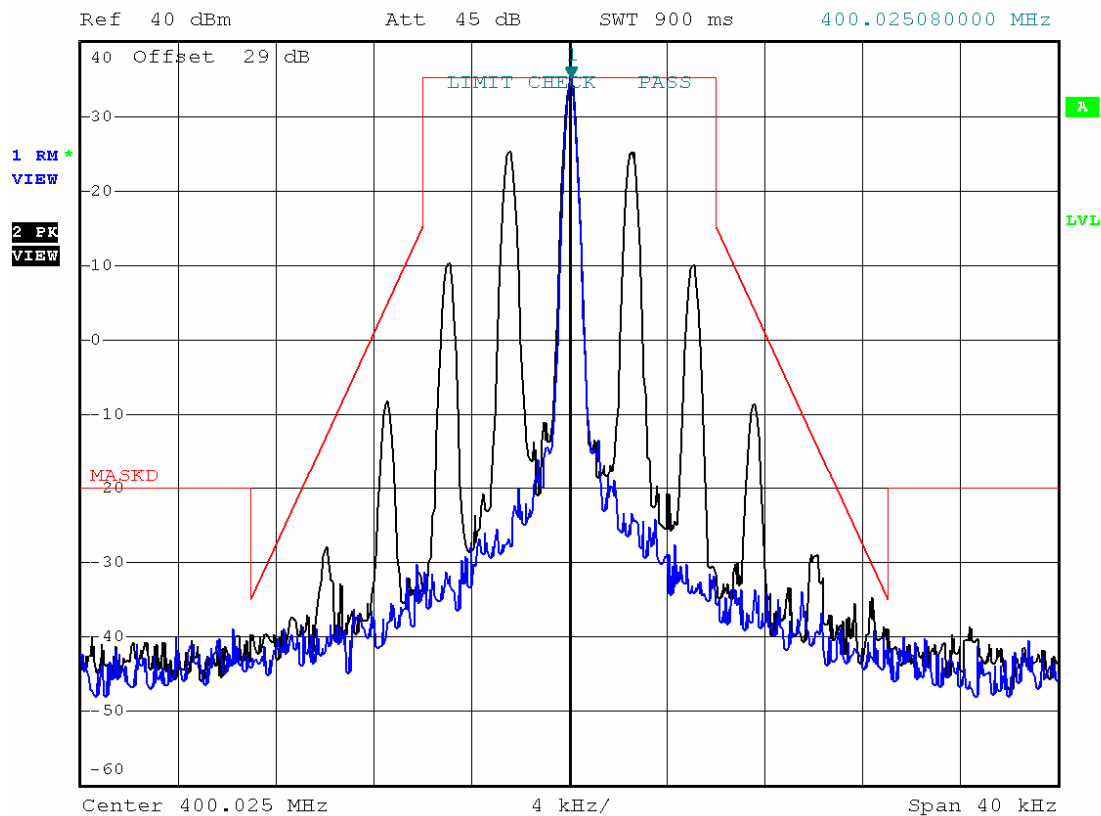

Date: 14.JAN.2008 10:36:40


5.7.7.2 Plot 2

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 6.4
Operating Frequency :	400.025 MHz
Channel :	1st Channel
Power Output :	1 Watt
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask D
Reference Voltage :	7.4 VDC

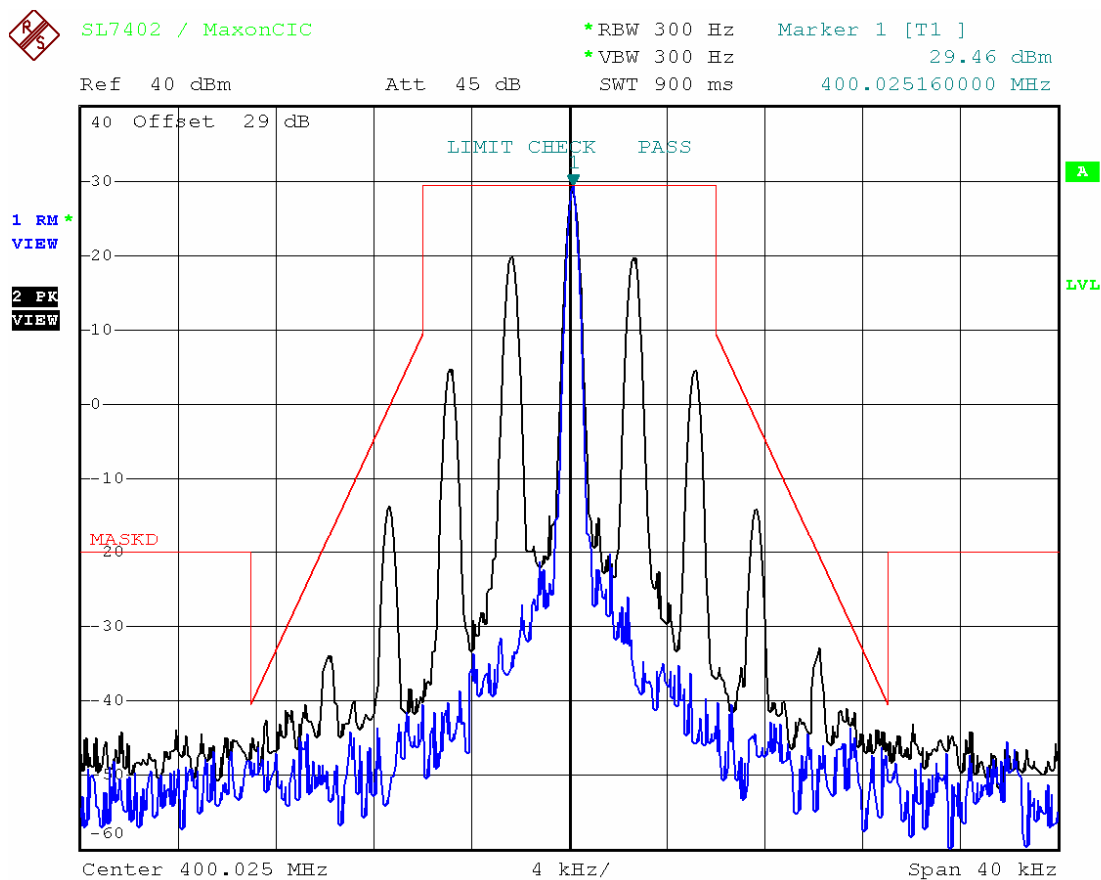

Date: 14.JAN.2008 10:32:07


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 6.4
Operating Frequency :	400.025 MHz
Channel :	1st Channel
Power Output :	4 Watts
Channel Spacing :	WideBand
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask B
Reference Voltage :	7.4 VDC

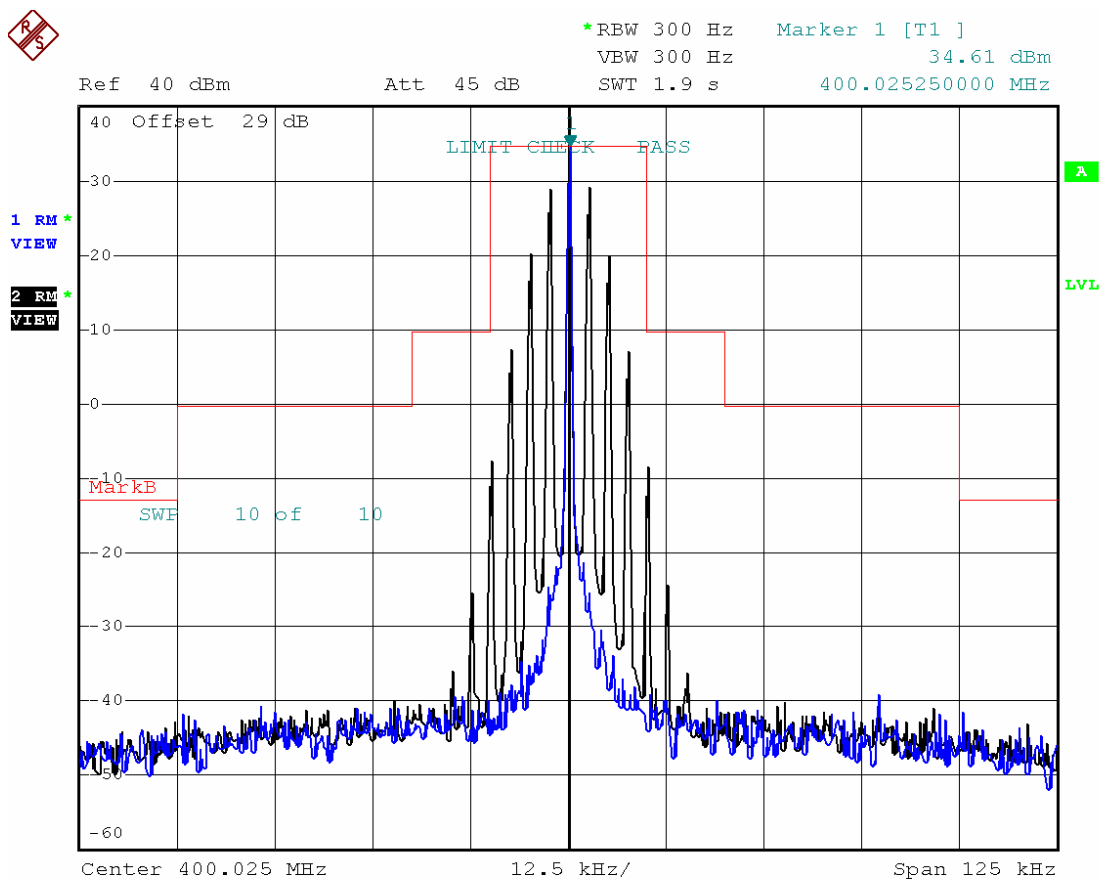

Date: 13.DEC.2007 13:34:55

5.7.7.4 Plot 4

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 6.4
Operating Frequency :	400.025 MHz
Channel :	1st Channel
Power Output :	1 Watt
Channel Spacing :	WideBand
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask B
Reference Voltage :	7.4 VDC

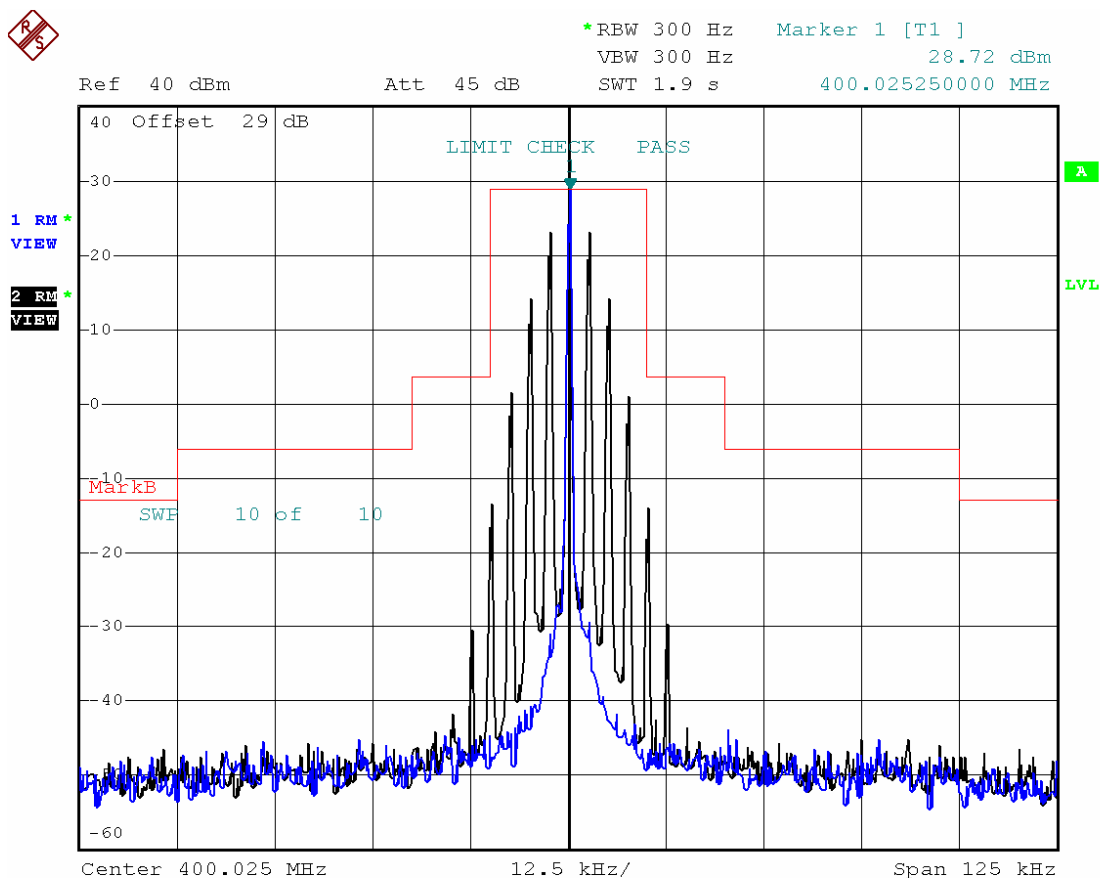

SL7402 / MaxonCIC

Date: 13.DEC.2007 13:37:58


5.7.7.5 Plot 5

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 6.4
Operating Frequency :	423.025 MHz
Channel :	2nd Channel
Power Output :	4 Watts
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask D
Reference Voltage :	7.4 VDC



SI7402 / MaxonCIC

*RBW 300 Hz Marker 1 [T1]
*VBW 300 Hz 34.73 dBm
Ref 40 dBm Att 45 dB SWT 900 ms 423.025080000 MHz

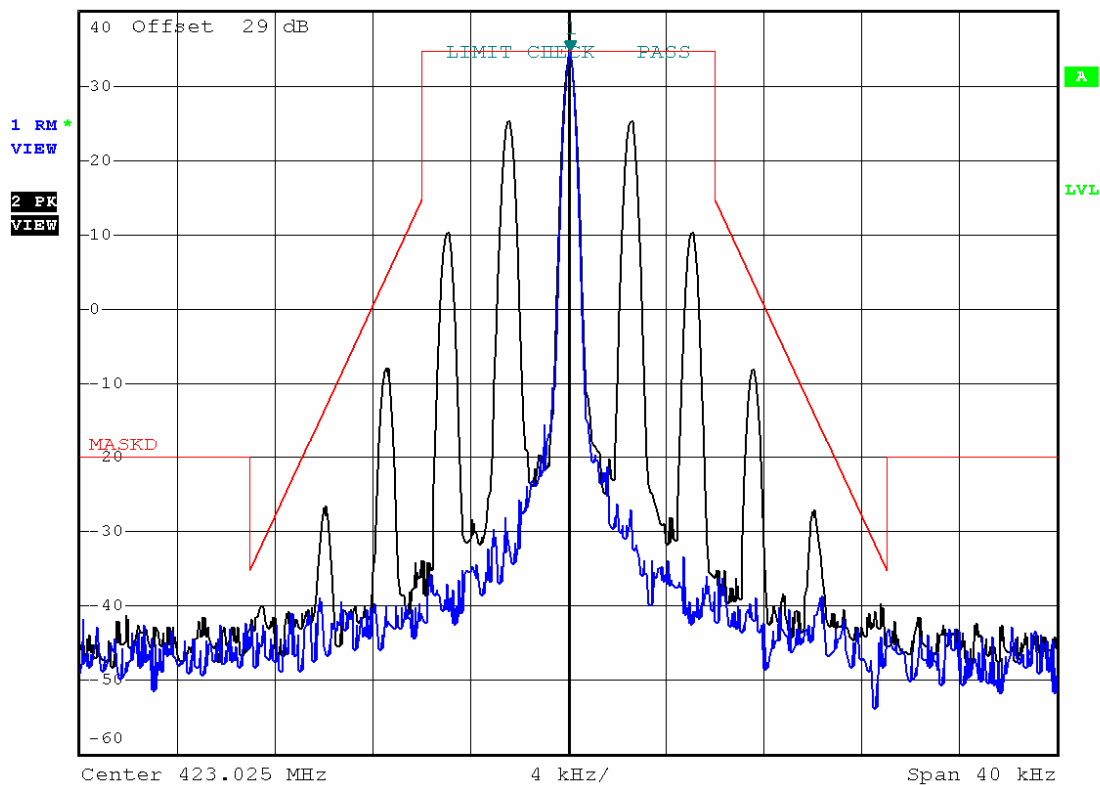

Date: 14.JAN.2008 10:41:10


5.7.7.6 Plot 6

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 6.4
Operating Frequency :	423.025 MHz
Channel :	2nd Channel
Power Output :	1 Watt
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask D
Reference Voltage :	7.4 VDC




SL7402 / MaxonCIC

*RBW 300 Hz Marker 1 [T1]
*VBW 300 Hz 29.75 dBm
Ref 40 dBm Att 45 dB SWT 900 ms 423.025080000 MHz

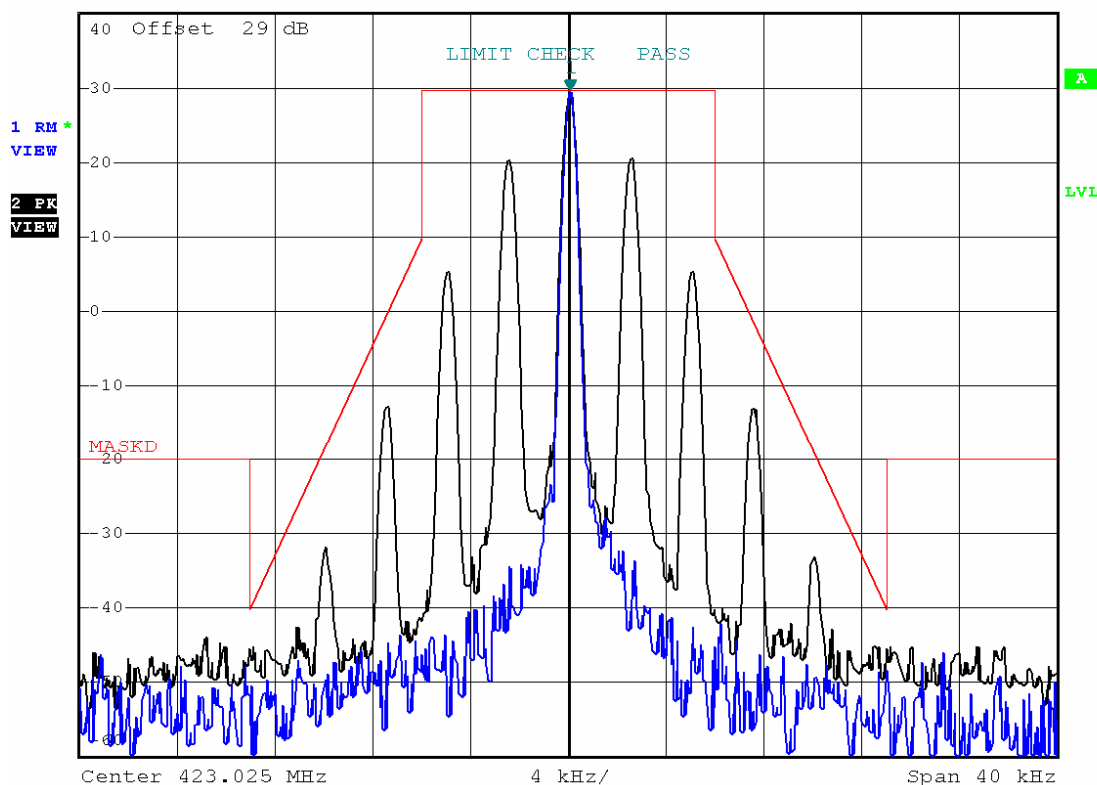

Date: 14.JAN.2008 10:43:52


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 6.4
Operating Frequency :	423.025 MHz
Channel :	2nd Channel
Power Output :	4 Watts
Channel Spacing :	WideBand
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask B
Reference Voltage :	7.4 VDC

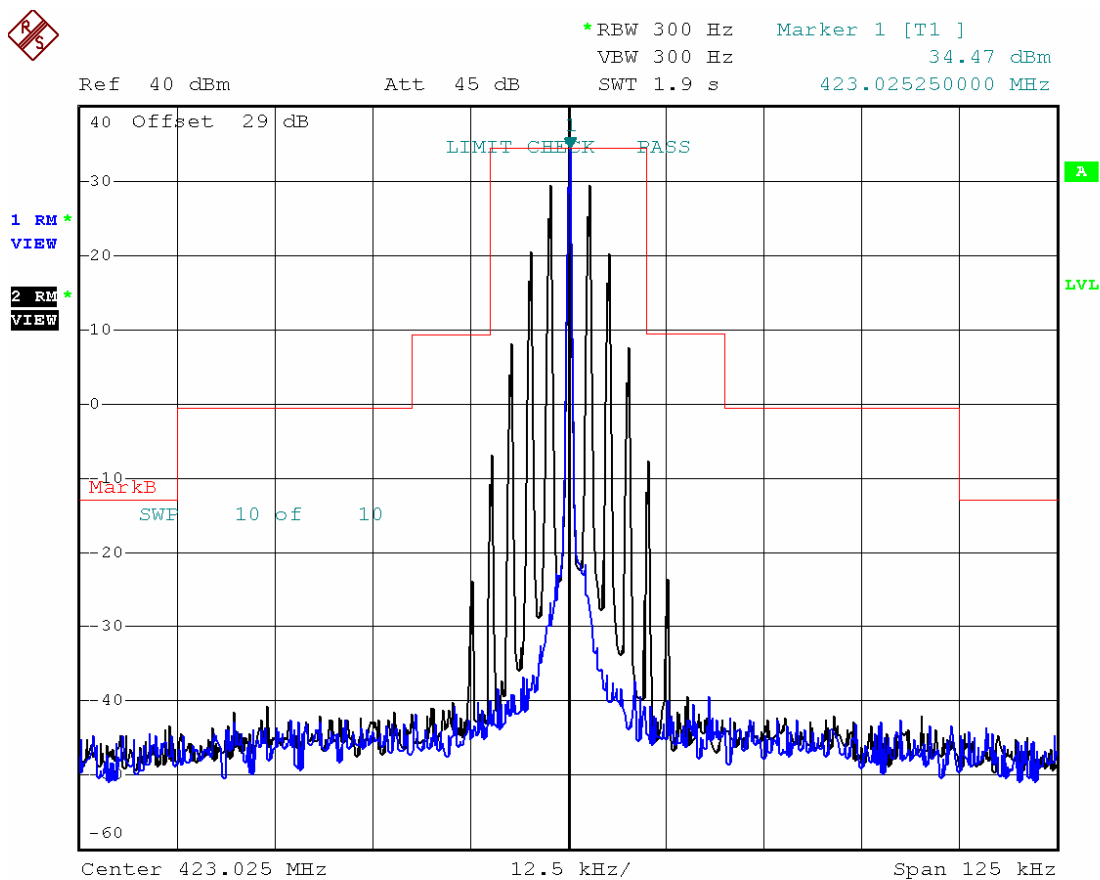

Date: 13.DEC.2007 13:43:56

5.7.7.8 Plot 8

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 6.4
Operating Frequency :	423.025 MHz
Channel :	2nd Channel
Power Output :	1 Watt
Channel Spacing :	WideBand
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask B
Reference Voltage :	7.4 VDC

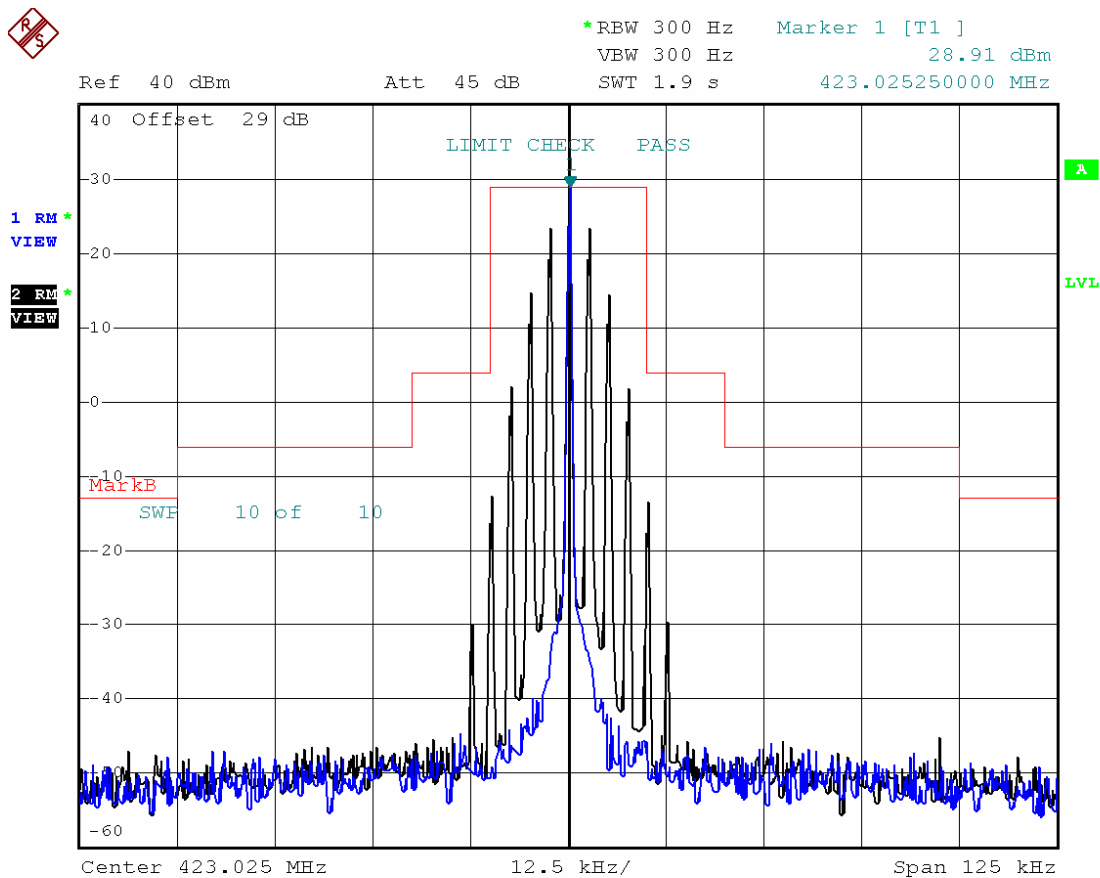


SL7402 / MaxonCIC

Date: 13.DEC.2007 13:49:15

5.7.7.9 Plot 9

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 6.4
Operating Frequency :	446.025 MHz
Channel :	3rd Channel
Power Output :	4 Watts
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask D
Reference Voltage :	7.4 VDC

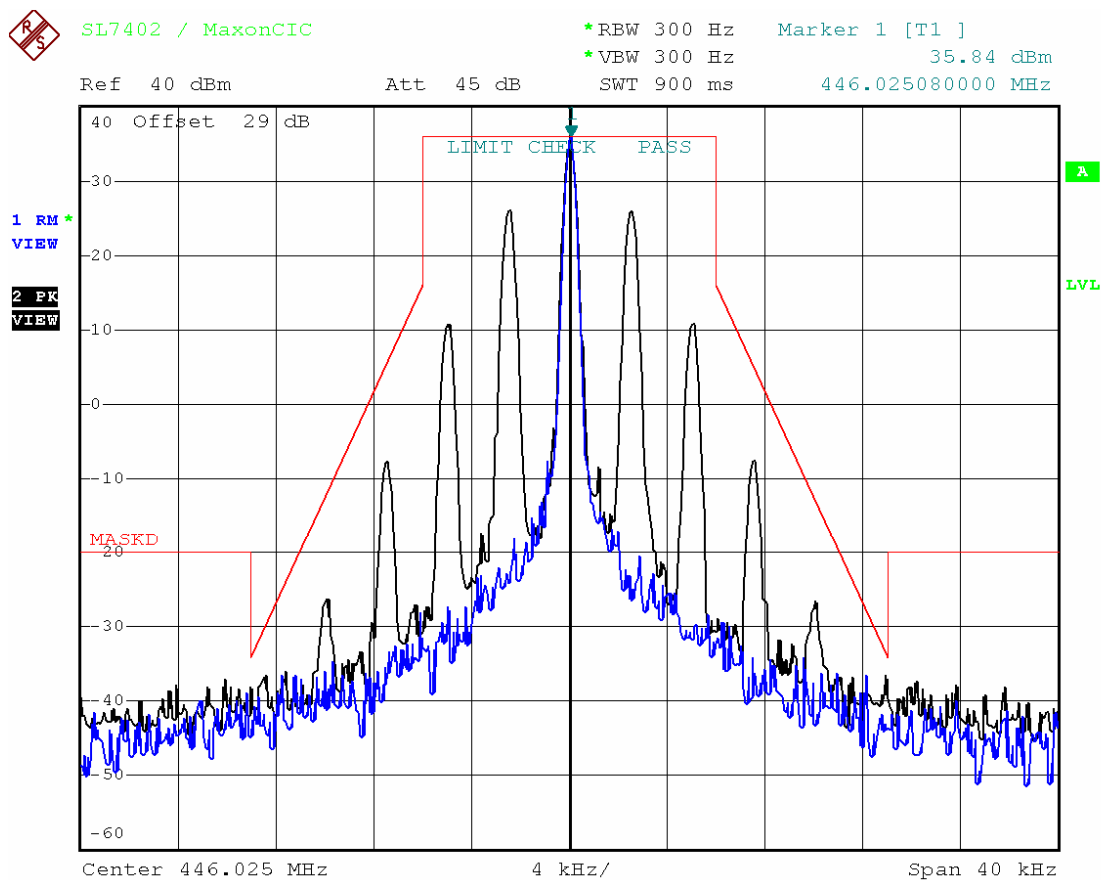

Date: 14.JAN.2008 10:47:29


5.7.7.10 Plot 10

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 6.4
Operating Frequency :	446.025 MHz
Channel :	3rd Channel
Power Output :	1 Watt
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask D
Reference Voltage :	7.4 VDC



SL7402 / MaxonCIC


*RBW 300 Hz Marker 1 [T1]
*VBW 300 Hz 29.39 dBm
Ref 40 dBm Att 45 dB SWT 900 ms 446.025080000 MHz

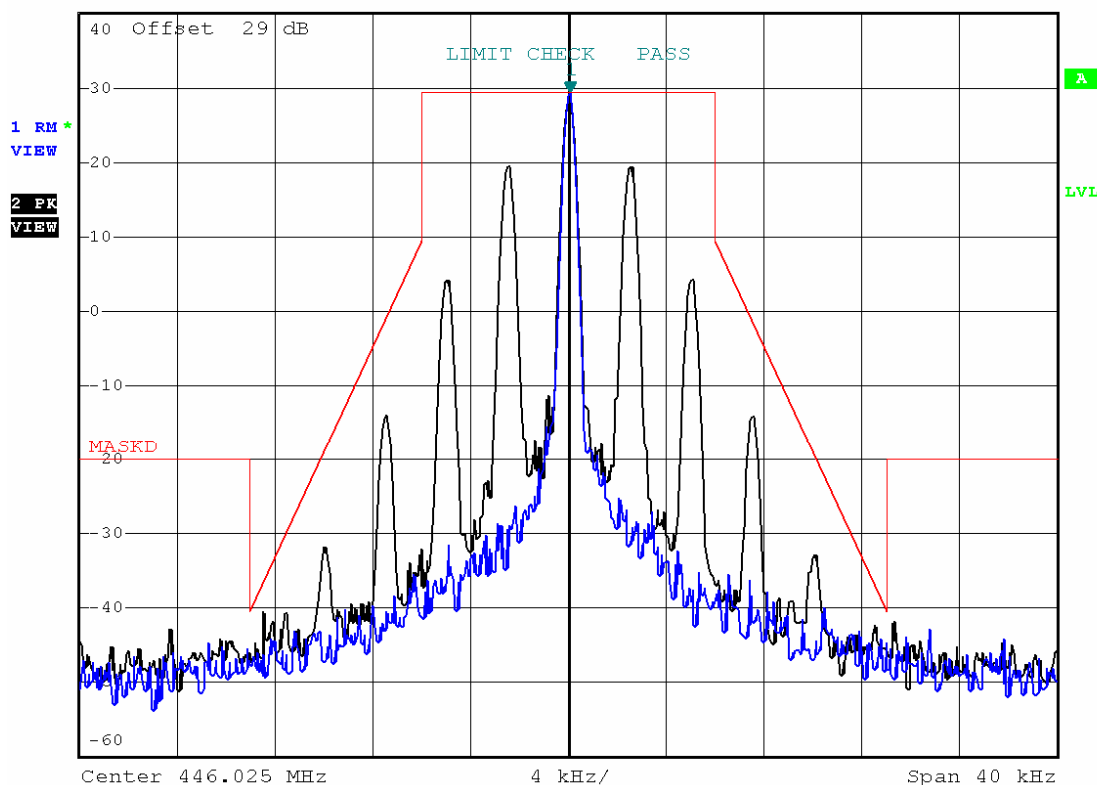

Date: 14.JAN.2008 10:49:59

5.7.7.11 Plot 11

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 6.4
Operating Frequency :	446.025 MHz
Channel :	3rd Channel
Power Output :	4 Watts
Channel Spacing :	WideBand
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask B
Reference Voltage :	7.4 VDC

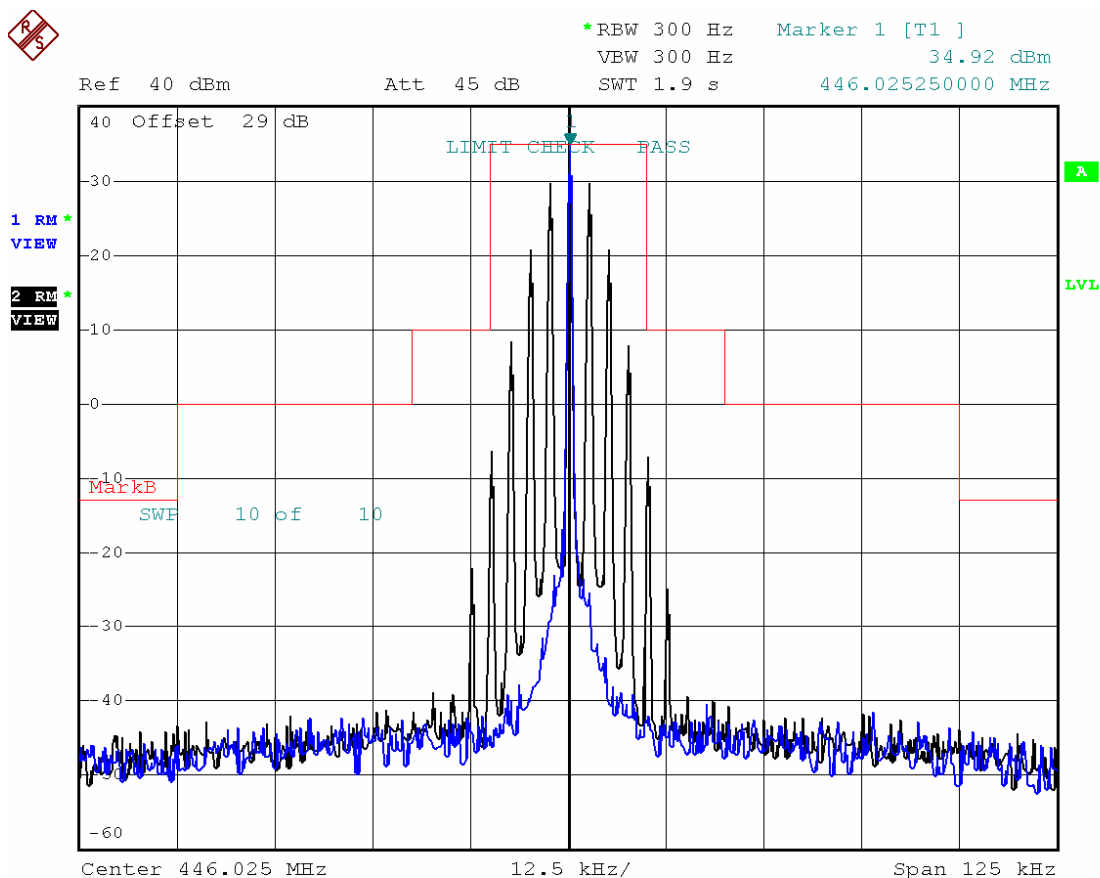

SL7402 / MaxonCIC

Date: 13.DEC.2007 14:17:41

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 6.4
Operating Frequency :	446.025 MHz
Channel :	3rd Channel
Power Output :	1 Watt
Channel Spacing :	WideBand
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask B
Reference Voltage :	7.4 VDC


5.7.7.13 Plot 13

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 6.4
Operating Frequency :	469.975 MHz
Channel :	4th Channel
Power Output :	4 Watts
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask D
Reference Voltage :	7.4 VDC



SL7402 / MaxonCIC

*RBW 300 Hz Marker 1 [T1]
*VBW 300 Hz 34.47 dBm
Ref 40 dBm Att 45 dB SWT 900 ms 469.975080000 MHz

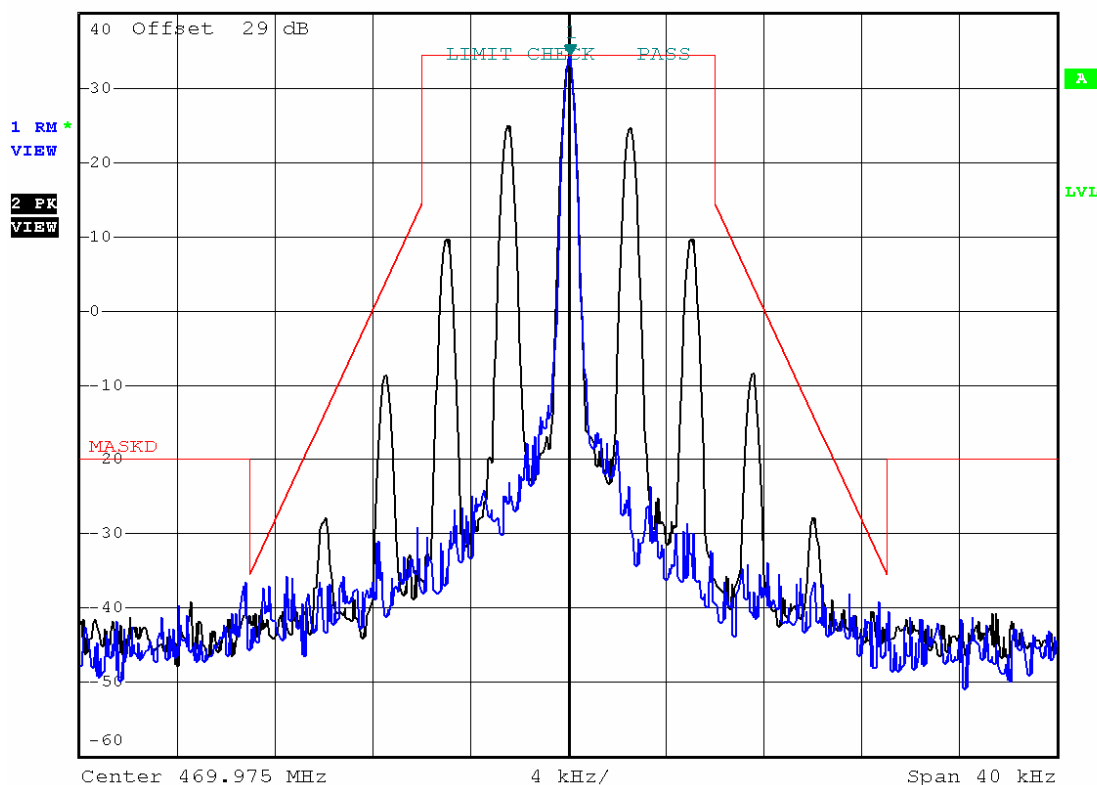

Date: 14.JAN.2008 10:54:39


5.7.7.14 Plot 14

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 6.4
Operating Frequency :	469.975 MHz
Channel :	4th Channel
Power Output :	1 Watt
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask D
Reference Voltage :	7.4 VDC



SL7402 / MaxonCIC


*RBW 300 Hz Marker 1 [T1]
*VBW 300 Hz 29.52 dBm
Ref 40 dBm Att 45 dB SWT 900 ms 469.975160000 MHz

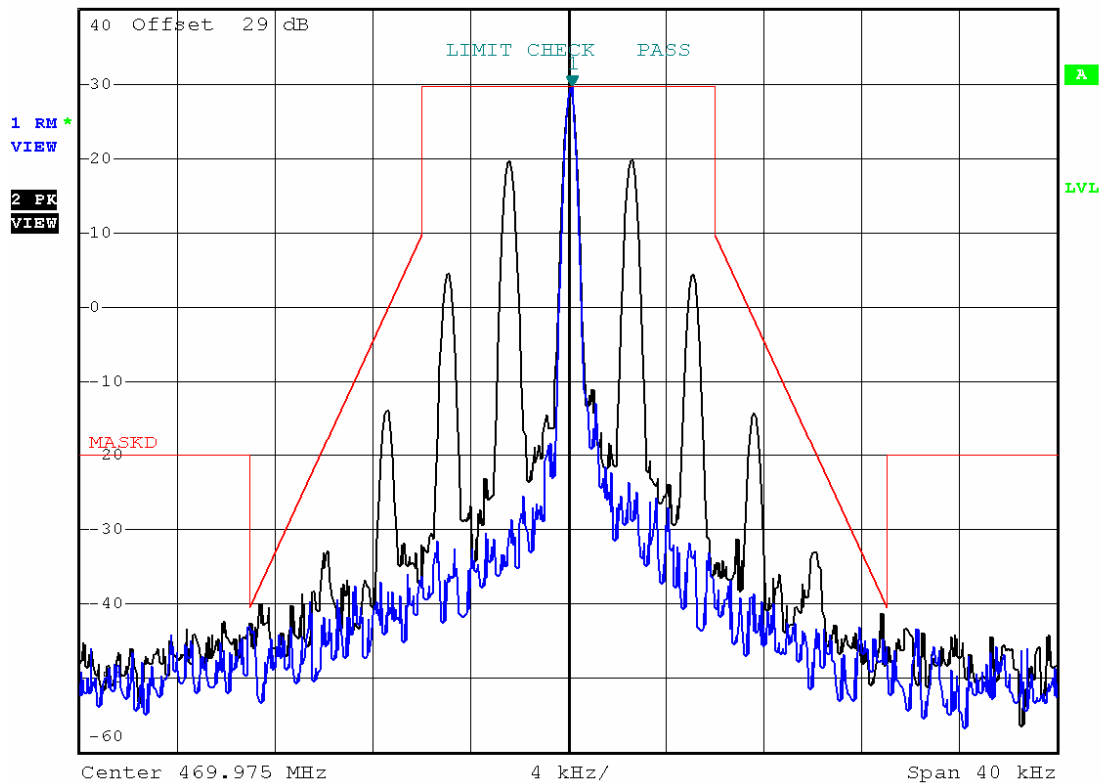

Date: 14.JAN.2008 12:11:52

5.7.7.15 Plot 15

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 6.4
Operating Frequency :	469.975 MHz
Channel :	4th Channel
Power Output :	4 Watts
Channel Spacing :	WideBand
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask B
Reference Voltage :	7.4 VDC

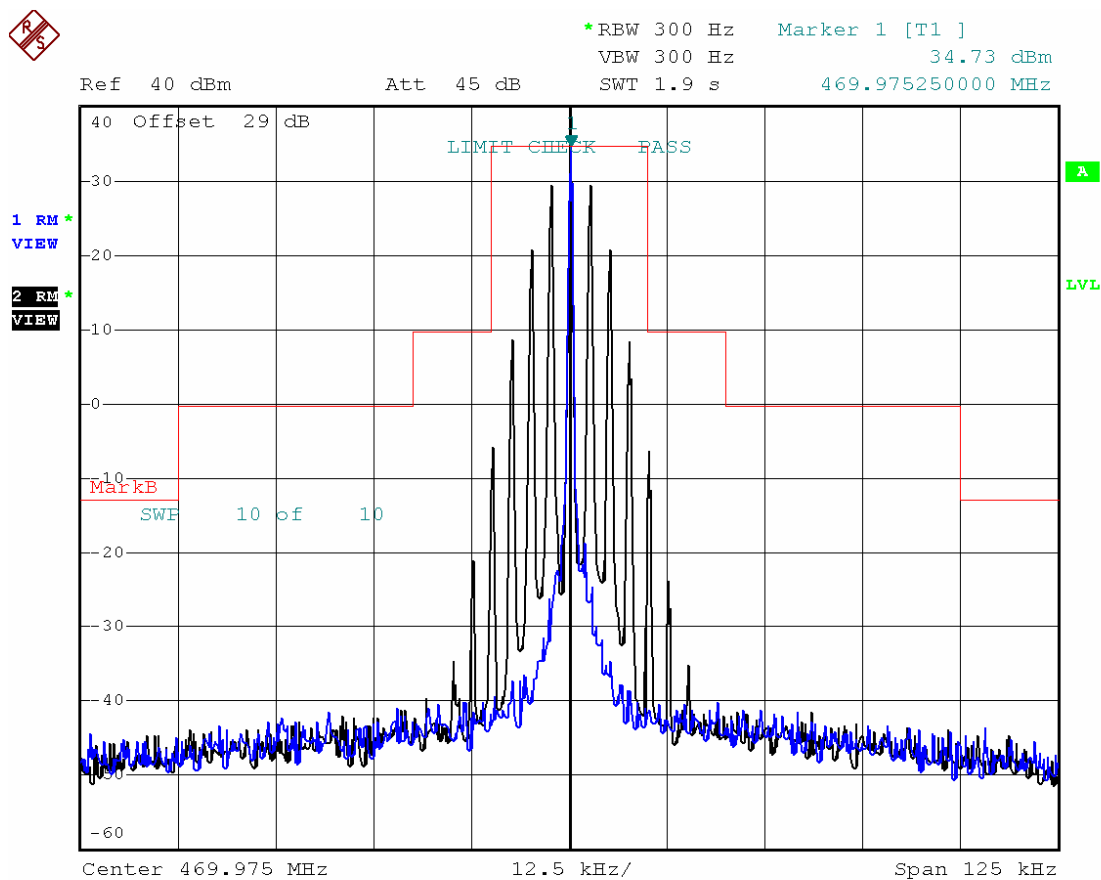


SL7402 / MaxonCIC

Date: 13.DEC.2007 14:28:35

5.7.7.16 Plot 16

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 6.4
Operating Frequency :	469.975 MHz
Channel :	4th Channel
Power Output :	1 Watt
Channel Spacing :	WideBand
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask B
Reference Voltage :	7.4 VDC

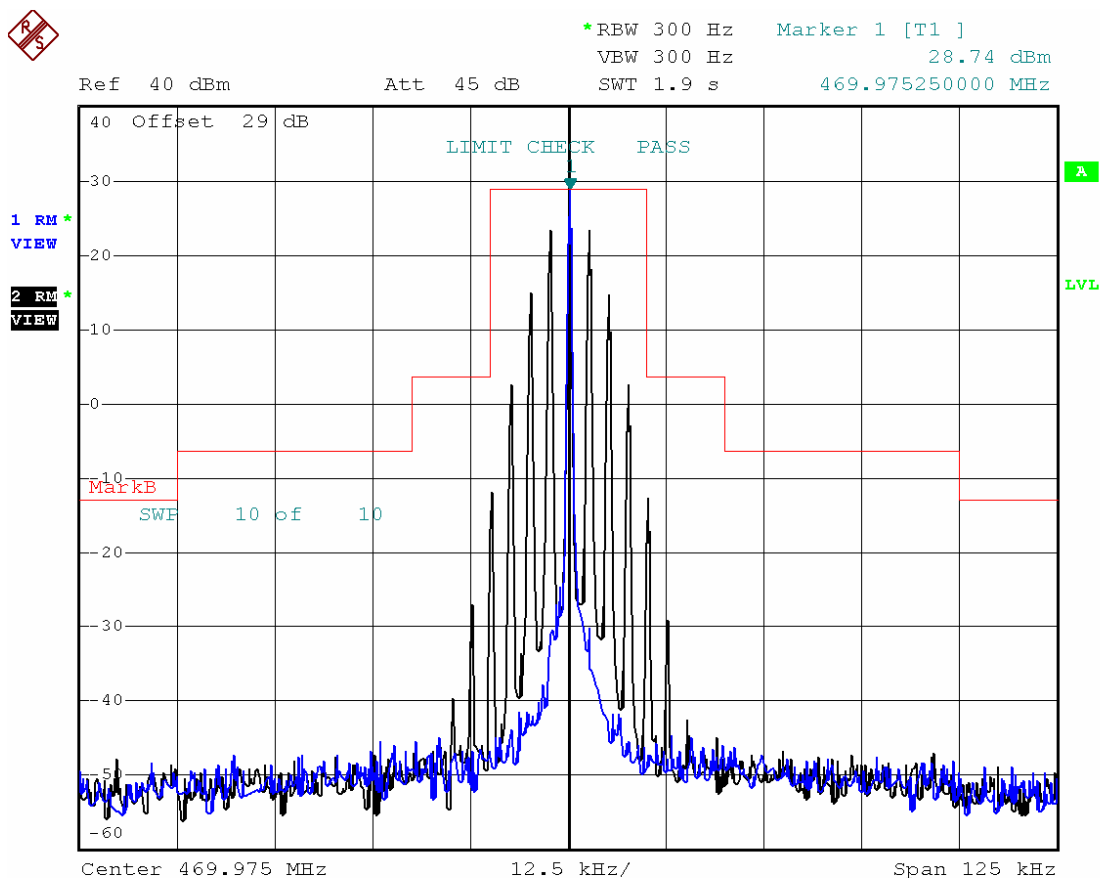

SL7402 / MaxonCIC

Date: 13.DEC.2007 14:25:26

5.8 Spurious Emissions at Antenna Terminals

Conducted spurious emissions are emissions at the antenna terminals on a frequency or frequencies which are outside of band sufficient to ensure transmission or information of required quality for the class of communication desired.

5.8.1 Specification

FCC Rules Part 2, Section 2.1051
FCC Rules Part 90, Section 90.210
Industry Canada, RSS-119 Section 6.3

5.8.2 Method of Measurement

ANSI/TIA-603-B-2002 Section 2.2.13

5.8.3 Measurement Set-Up

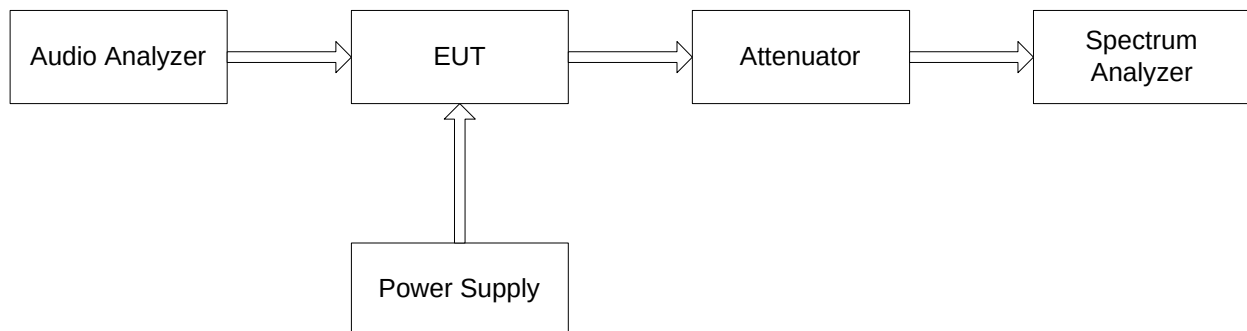


Fig.6

5.8.4 Test Equipment List

Equipment	Model Name	Manufacturer
EUT	SL7402	Maxon CIC Corp.
Power Supply	IPS-30B03DD	INTERACT
Audio Analyzer	8903B	Agilent
Spectrum Analyzer	FSP7	Rohde & Shwarz
Attenuator	33-30-33	WEINSCHEL

5.8.5 Measurement Procedure

- The unit was turned-up in accordance with the alignment procedure stated in the FIG. 6, and was loaded into a 50 ohm resistive termination.
- The antenna output terminal of the EUT was connected to the input of a 50 ohm spectrum analyzer through a matched 10 dB attenuator and notch filter.
- Transmitter was set to the maximum power output condition.
- The unit was modulated with a 2.5 kHz audio tone at an input level 16dB greater than that required 50% modulation. The spectrum was scanned from the lowest frequency generated in the equipment to the 10th harmonic of the carrier.
- The test performed at worst case mode. (High power and Narrow Band)
- The limit was applied according the $50+10\log_{10}(P)$ (P: mean power in Watts) dB.

5.8.5 Data


Frequency (MHz)	Transmitter Spurious Emissions		
	Level (dBm)	Limit (dBm)	Margin (dB)
800.250	-48.80	-20	-28.80
1200.075	-49.76		-29.76
2400.150	-47.37		-27.37
-	-		-
846.050	-47.43	-20	-27.43
1269.075	-49.80		-29.80
2538.150	-46.20		-26.20
2961.175	-49.55		-29.55
892.050	-46.99	-20	-26.99
1338.075	-50.38		-30.38
2676.150	-47.13		-27.13
-	-		-
939.950	-43.15	-20	-23.15
2819.850	-49.87		-29.87
-	-		-
-	-		-

5.8.6 Plots

5.8.6.1 1st Channel

FCC Rules :	Part 2 §2.1051 & §90.210
IC Rules :	RSS-119 Section 6.3
Operating Frequency :	400.025 MHz
Channel :	1st Channel
Power Output :	4 Watts
Channel Spacing :	Narrow Band
Reference Voltage :	7.4 VDC
Limit :	50 + 10log ₁₀ P (-20dBm)


5.8.6.1.1 10 MHz ~ 1 GHz

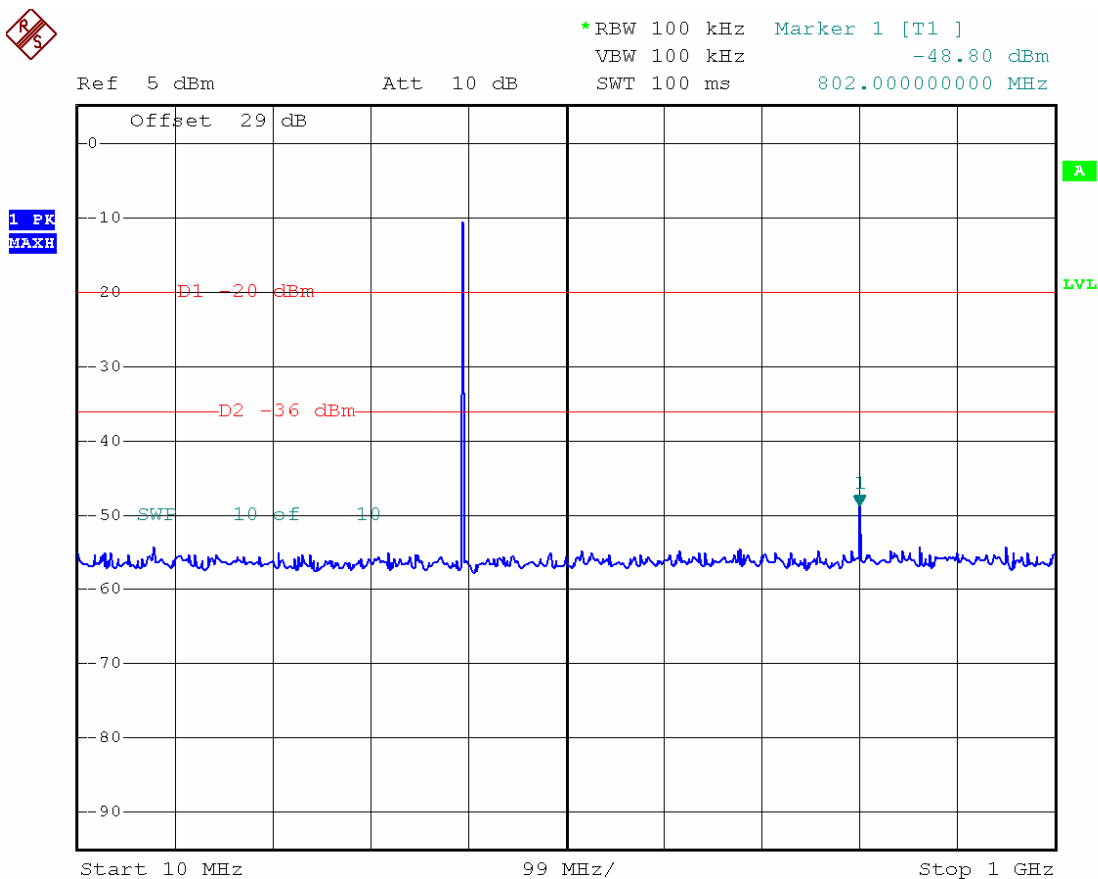

SL7402 / MaxonCIC

Date: 13.DEC.2007 18:27:23


1 РК
МАХН



5.8.6.2 2nd Channel

FCC Rules :	Part 2 §2.1051 & §90.210
IC Rules :	RSS-119 Section 6.3
Operating Frequency :	423.025 MHz
Channel :	2nd Channel
Power Output :	4 Watts
Channel Spacing :	Narrow Band
Reference Voltage :	7.4 VDC
Limit :	$50 + 10\log_{10}P$ (-20dBm)


5.8.6.2.1 10 MHz ~ 1 GHz

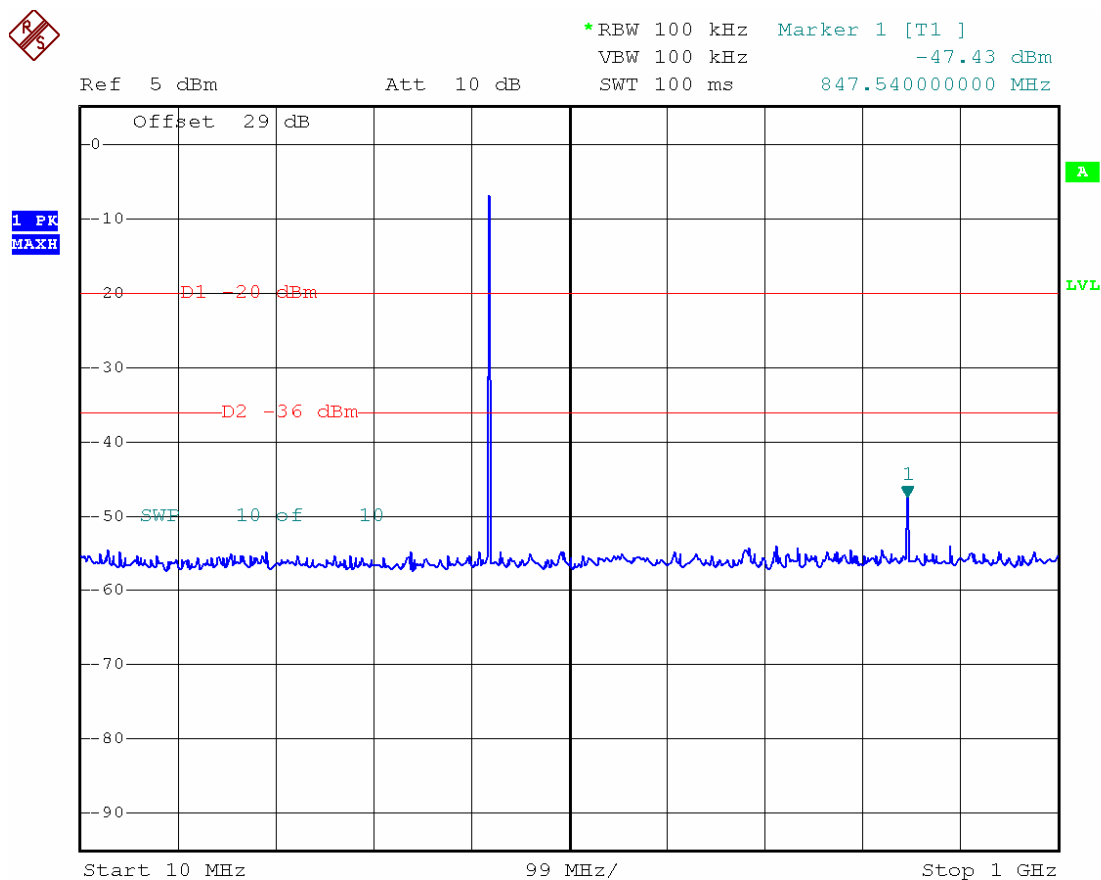

SL7402 / MaxonCIC

Date: 13.DEC.2007 18:26:54


5.8.6.2.2 1 GHz ~ 7 GHz

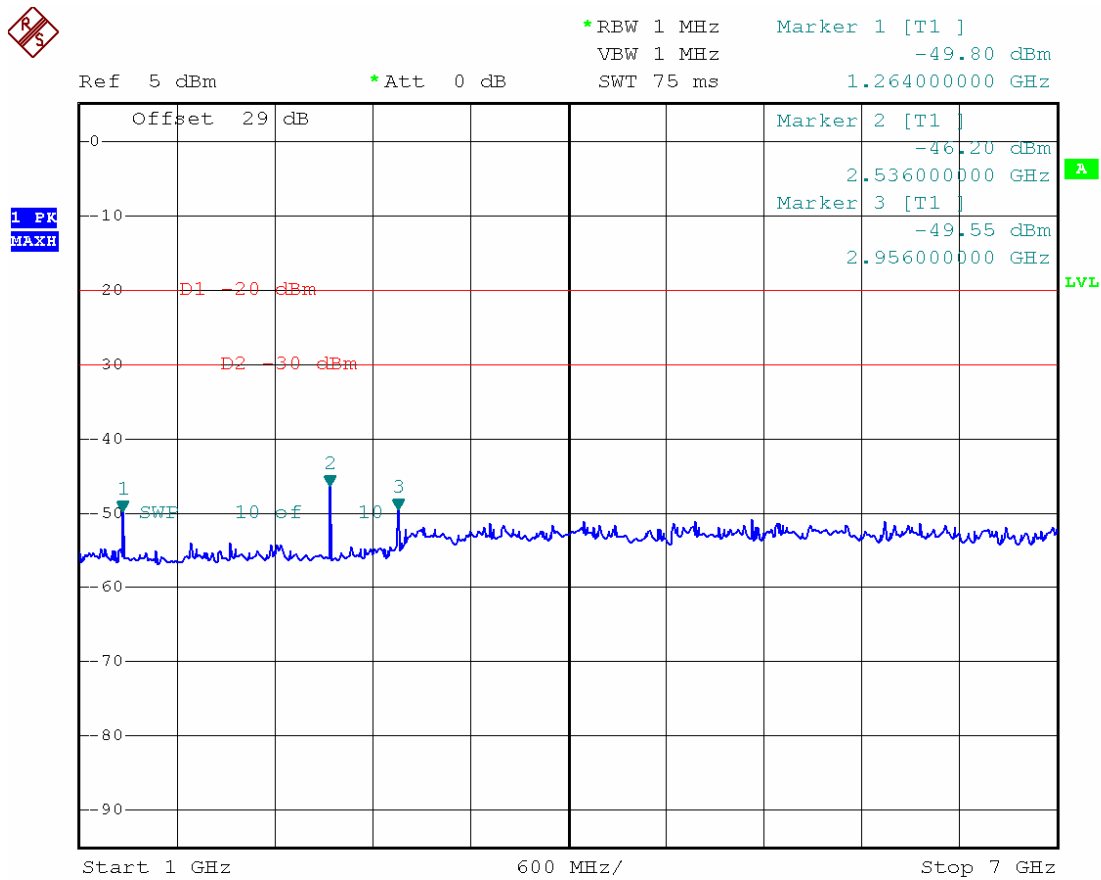

SL7402 / MaxonCIC


Date: 13.DEC.2007 18:29:25

FCC Rules :	Part 2 §2.1051 & §90.210
IC Rules :	RSS-119 Section 6.3
Operating Frequency :	446.025 MHz
Channel :	3rd Channel
Power Output :	4 Watts
Channel Spacing :	Narrow Band
Reference Voltage :	7.4 VDC
Limit :	$50 + 10\log_{10}P$ (-20dBm)

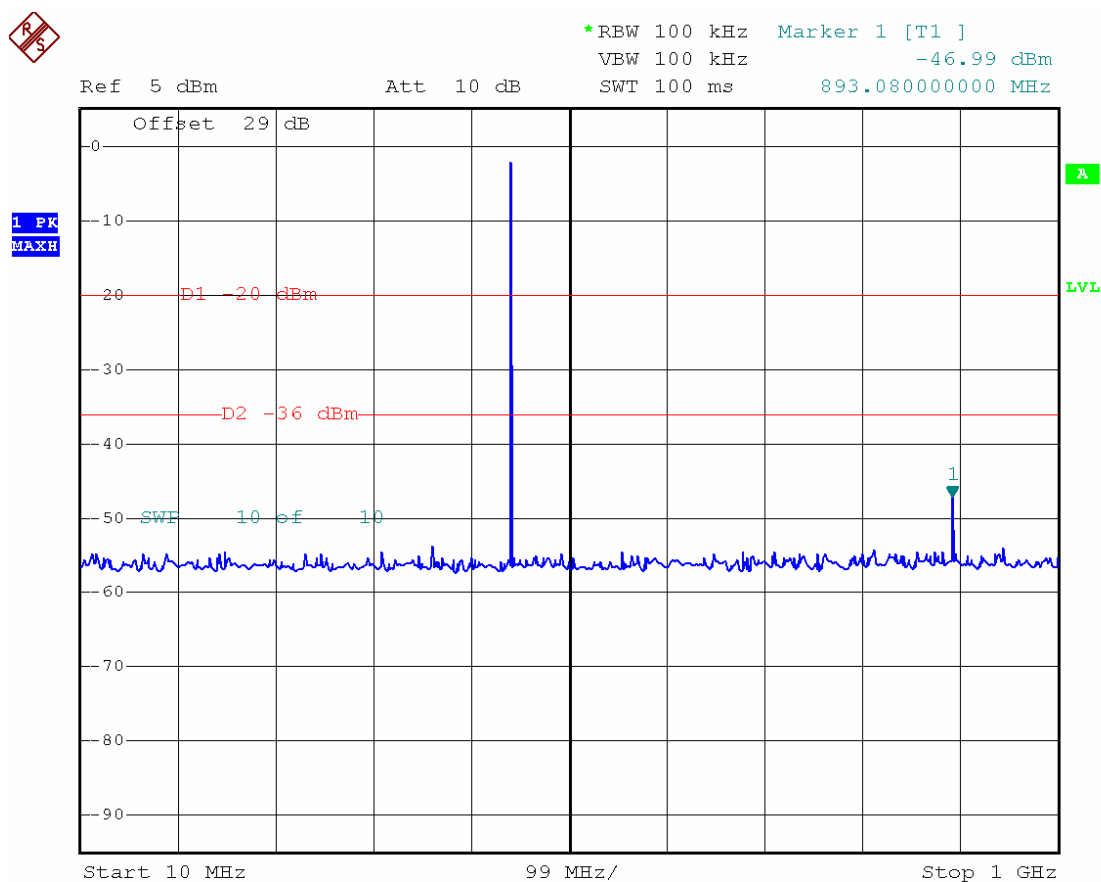

Date: 13.DEC.2007 18:26:22

5.8.6.3.2 1 GHz ~ 7 GHz

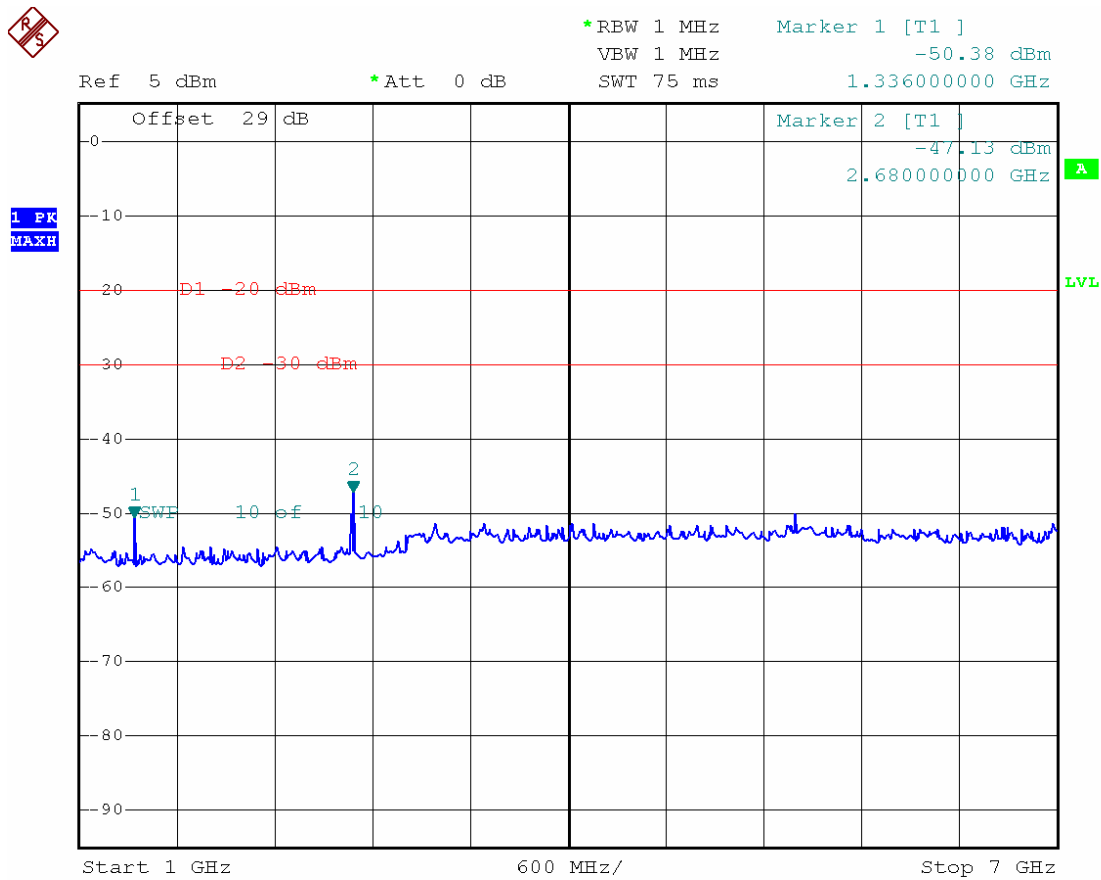


SL7402 / MaxonCIC

Date: 13.DEC.2007 18:29:58

5.8.6.4
4th Channel


FCC Rules :	Part 2 §2.1051 & §90.210
IC Rules :	RSS-119 Section 6.3
Operating Frequency :	469.025 MHz
Channel :	4th Channel
Power Output :	4 Watts
Channel Spacing :	Narrow Band
Reference Voltage :	7.4 VDC
Limit :	50 + 10log ₁₀ P (-20dBm)

5.8.6.4.1
10 MHz ~ 1 GHz

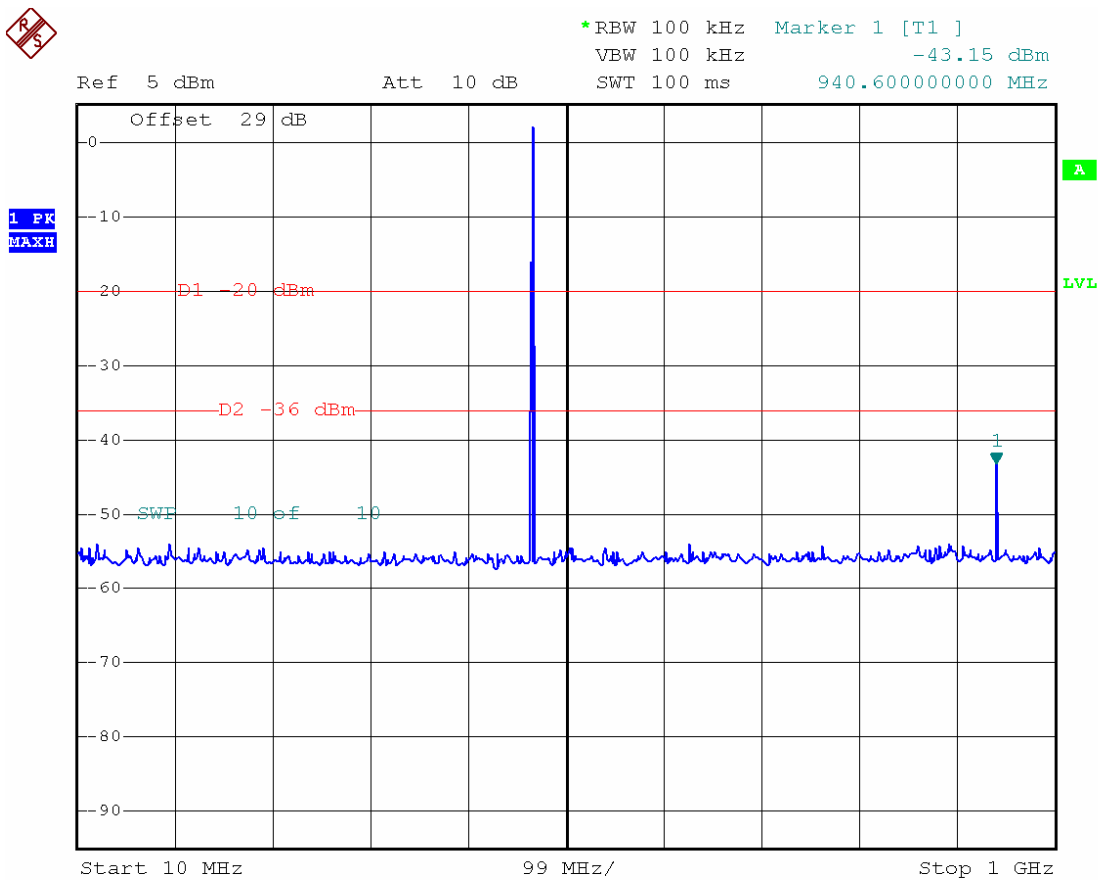

SL7402 / MaxonCIC
Date: 13.DEC.2007 18:25:43

5.8.6.4.2 1 GHz ~ 7 GHz

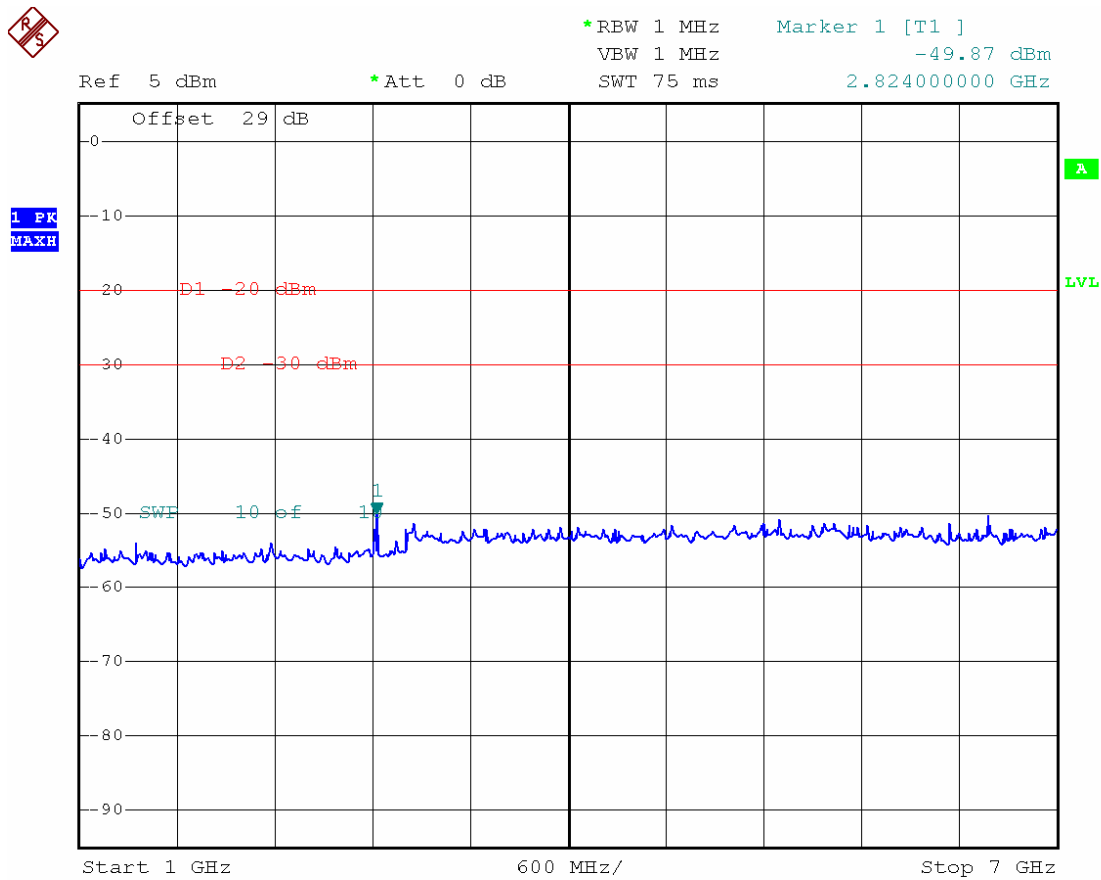

SL7402 / MaxonCIC

Date: 13.DEC.2007 18:30:26

5.9 Field Strength of Spurious Radiation

Radiated spurious emissions are emissions from the equipment when transmitting load on frequency or frequencies which are outside of band sufficient to ensure transmission or information of required quality for the class of communication desired.

5.9.1 Specification

FCC Rules Part 2, Section 2.1053(a)
FCC Rules Part 90, Section 90.210
Industry Canada, RSS-119 Section 6.3

5.9.2 Method of Measurement

ANSI/TIA-603-B-2002 Section 2.2.12

5.9.3 Measurement Set-Up

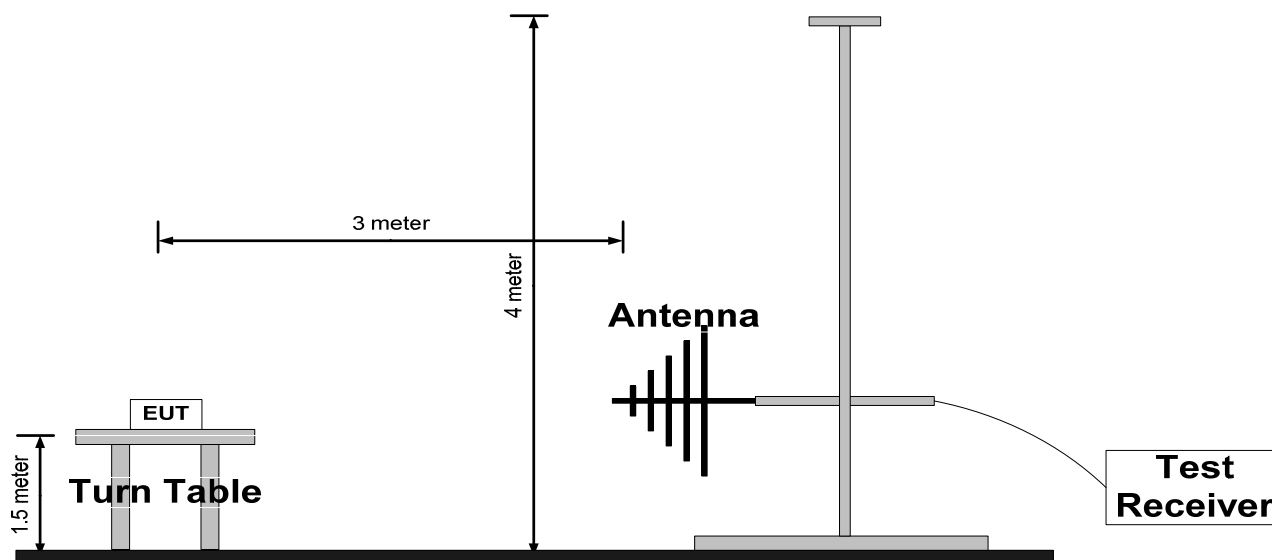


Fig.7

5.9.4 Test Equipment List

Equipment	Model Name	Manufacturer
EUT	SL7402	Maxon CIC Corp.
Power Supply	IPS-30B03DD	INTERACT
Audio Analyzer	8903B	Agilent
Spectrum Analyzer	E7403A	Agilent
Bilog Antenna	VULB9160	SWALZBECK
Horn Antenna	BBHA 9120 D	SWALZBECK

5.9.5 Test Data

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 6.3
Power Output :	4 Watts
Reference Voltage :	7.4 VDC
Channel Spacing :	Narrow Band
Limit :	50 + 10log ₁₀ P (-20dBm)

Frequency [MHz]	Spectrum Reading [dBuV/m]	Ant. Pol. [H/V]	S.G Level [dBm]	Ant. Gain [dBi]	Loss [dB]	Emission Level [dBm]	Limit [dBm]	Margin [dB]
400.025	131.9	V	+33.2	6.8	4.2	+35.8	-	-
800.050	57.0	H	-38.9	5.8	6.0	-39.1	-20	19.1
1200.075	62.5	-	-33.5	7.5	7.6	-33.6		13.6
1600.100	63.9	-	-32.7	9.4	8.9	-32.2		12.2
2000.125	59.5	-	-36.9	10.4	10.1	-36.6		16.6
423.025	132.1	V	+33.4	6.8	4.2	+36.0	-	-
846.050	57.6	H	-38.3	6.0	6.2	-38.5	-20	18.5
1269.075	56.8	-	-39.2	7.8	7.9	-39.3		19.3
1692.100	63.3	-	-33.6	9.9	9.1	-32.8		12.8
-	-	-	-	-	-	-		-
446.025	132.3	V	+34.0	6.6	4.4	+36.2	-	-
892.050	58.5	H	-39.0	5.9	6.5	-39.6	-20	19.6
1338.075	63.0	-	-32.9	7.9	8.1	-33.1		13.1
1784.100	64.2	-	-32.7	10.2	9.4	-31.9		11.9
2230.125	63.6	-	-32.3	10.5	10.7	-32.5		12.5
469.975	132.3	V	+34.0	6.6	4.4	+36.2	-	-
939.950	58.8	H	-36.3	5.6	6.6	-37.3	-20	17.3
1409.925	62.9	-	-32.9	8.0	8.3	-33.2		13.2
1879.900	58.6	-	-38.1	10.4	9.8	-37.5		17.5
2349.875	58.4	-	-37.3	10.6	11.0	-37.7		17.7

Note :

1. The spectrum bandwidth was set to RBW 100 kHz (freq. up to 1GHz) and RBW 1 MHz (freq above 1GHz).
2. Transmitter was set to the high power output (5 watts) condition.
3. The spectrum was checked from 30 MHz up to the 10th harmonic of the carrier frequency.
4. All emission not reported were found to be more than 20dB below the limit.
5. The EUT was positioned through 3 orthogonal axis and worst-case are reported.
6. Transmitter was set to the high power output (5 watts) condition because the high power setting is the worst case emission condition.
7. The measurement has been made both narrow and wide band but the attached plots are for narrowband. There is no difference in the test result for the bandwidth setting.
8. ERP measurements were performed using the standard battery with full charged condition.
9. The test performed at worst case mode. (High power and Narrow Band)
10. The limit was applied according to the section 90.210(d) 50+10logP or -20dBm or 70dBc whichever is less.

5.10 Frequency Stability / Temperature Variation

5.10.1 Specification

FCC Rules Part 2, Section 2.1055
FCC Rules Part 90, Section 90.231
Industry Canada, RSS-119 Section 7.0

5.10.2 Method of Measurement

ANSI/TIA-603-B-2002 Section 2.2.2

5.10.3 Measurement Set-Up

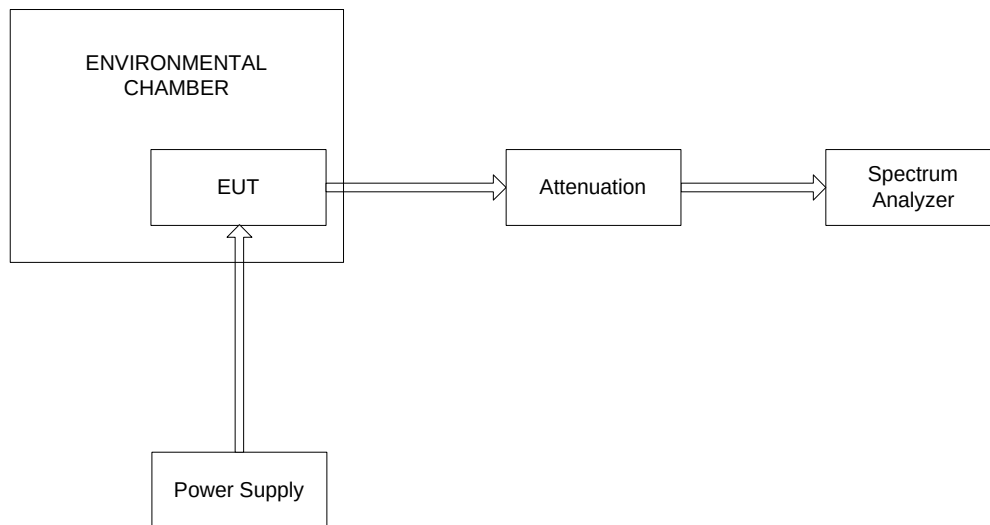


Fig.8

5.10.4 Test Equipment List

Equipment	Model Name	Manufacturer
EUT	SL7402	Maxon CIC Corp.
Power Supply	IPS-30B03DD	INTERACT
Attenuator	33-30-33	WEINSCHEL
Spectrum Analyzer	FSP7	Rohde & Shwarz
Environmental Chamber	EN-GLMP-54	ENEX

5.10.5 Test Procedure

- The unit was turn-up in accordance with the alignment procedure stated in the FIG. 8 , and was loaded into a 50 ohm resistive termination.
- With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
- With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
- The temperature tests were performed for the worst case.
- FCC Limits (according to part 90.213) : $2.5 \times 10^{-6} \times \text{Frequency}$


5.10.6 Test Result 1

FCC Rules :	Part 2 §2.1055 & §90.231
IC Rules :	RSS-119 Section 7.0
Operating Frequency :	400.025 MHz
Channel :	1st Channel
Power Output :	4 Watts
Modulation :	Non-Modulation
Reference Voltage :	7.4 VDC


5.10.6.1 Data

Voltage (%)	Power Supply (Vdc)	Temperature (°C)	Frequency (Hz)	Deviation (ppm)	Limit (ppm)
100 %	7.4	-30	400.025166	-0.370	2.5
100 %	7.4	-20	400.025192	-0.305	2.5
100 %	7.4	-10	400.025334	+0.050	2.5
100 %	7.4	0	400.025236	-0.195	2.5
100 %	7.4	+10	400.025336	+0.055	2.5
100 %	7.4	+20 (ref)	400.025314	0	2.5
100 %	7.4	+30	400.025312	-0.005	2.5
100 %	7.4	+40	400.025172	-0.355	2.5
100 %	7.4	+50	400.025134	-0.450	2.5
100 %	7.4	+60	400.025166	-0.370	2.5
85 %	6.29	+20	400.025316	+0.005	2.5
115 %	8.51	+20	400.025310	-0.010	2.5

5.10.6.2 Graph

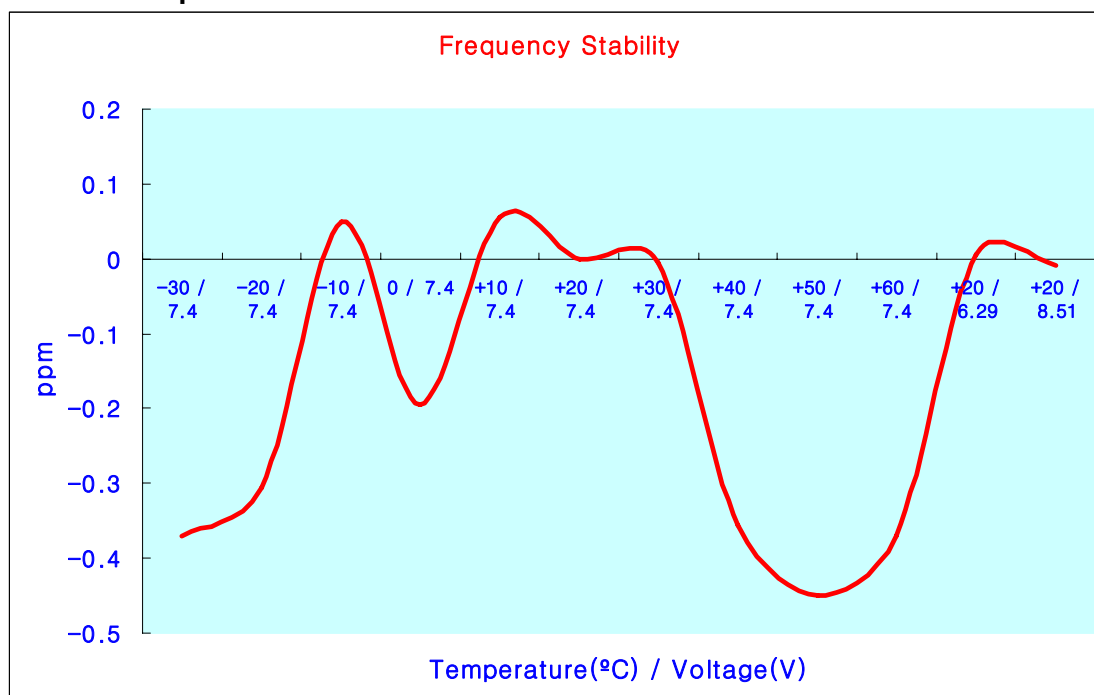


5.10.6.3 Plot 1 (-30°C)

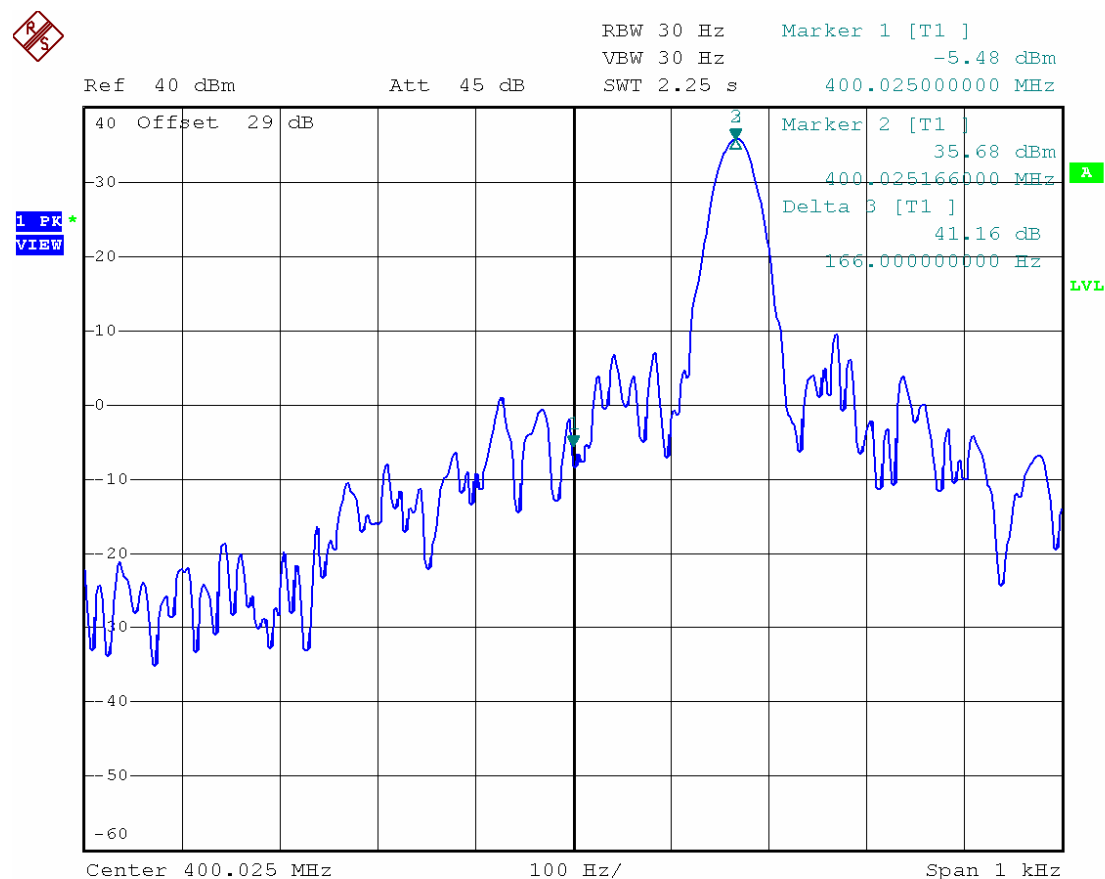

SL7402 / MaxonCIC


Date: 20.DEC.2007 18:27:04

5.10.6.4 Plot 2 (-20°C)

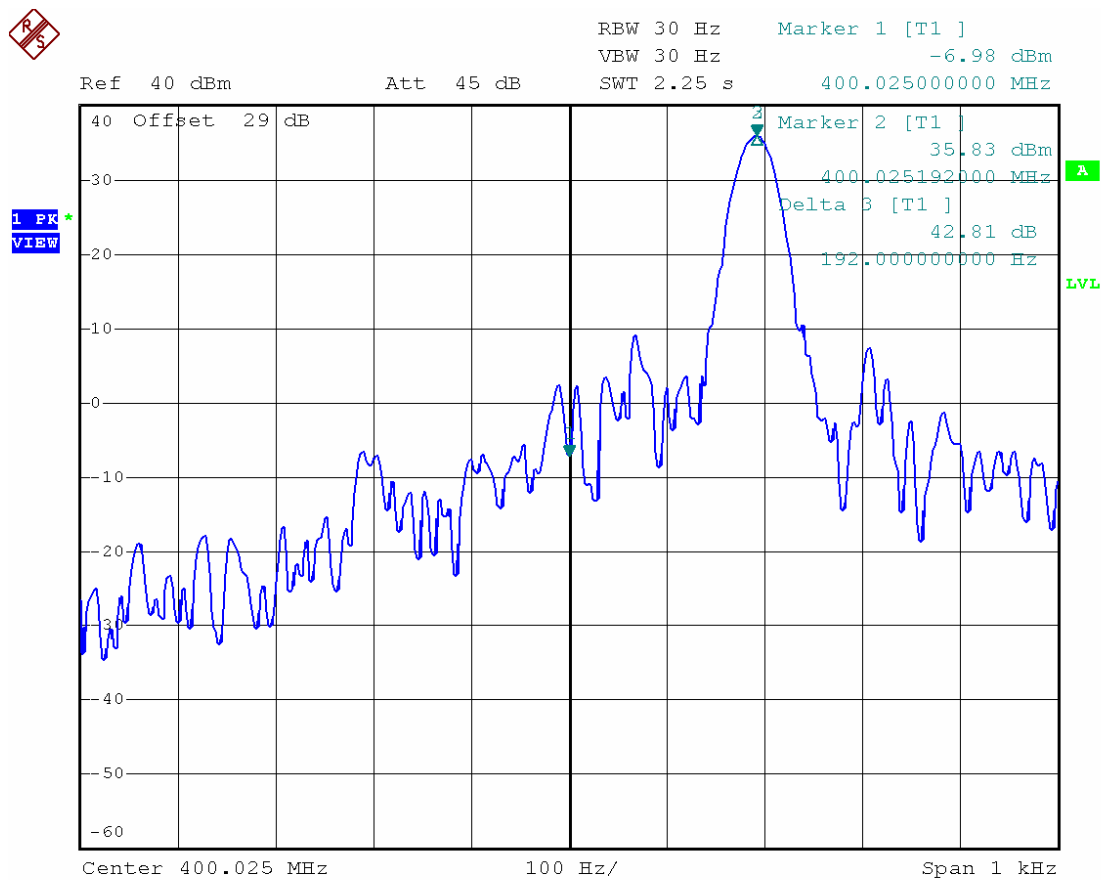


SL7402 / MaxonCIC

Date: 20.DEC.2007 18:48:21

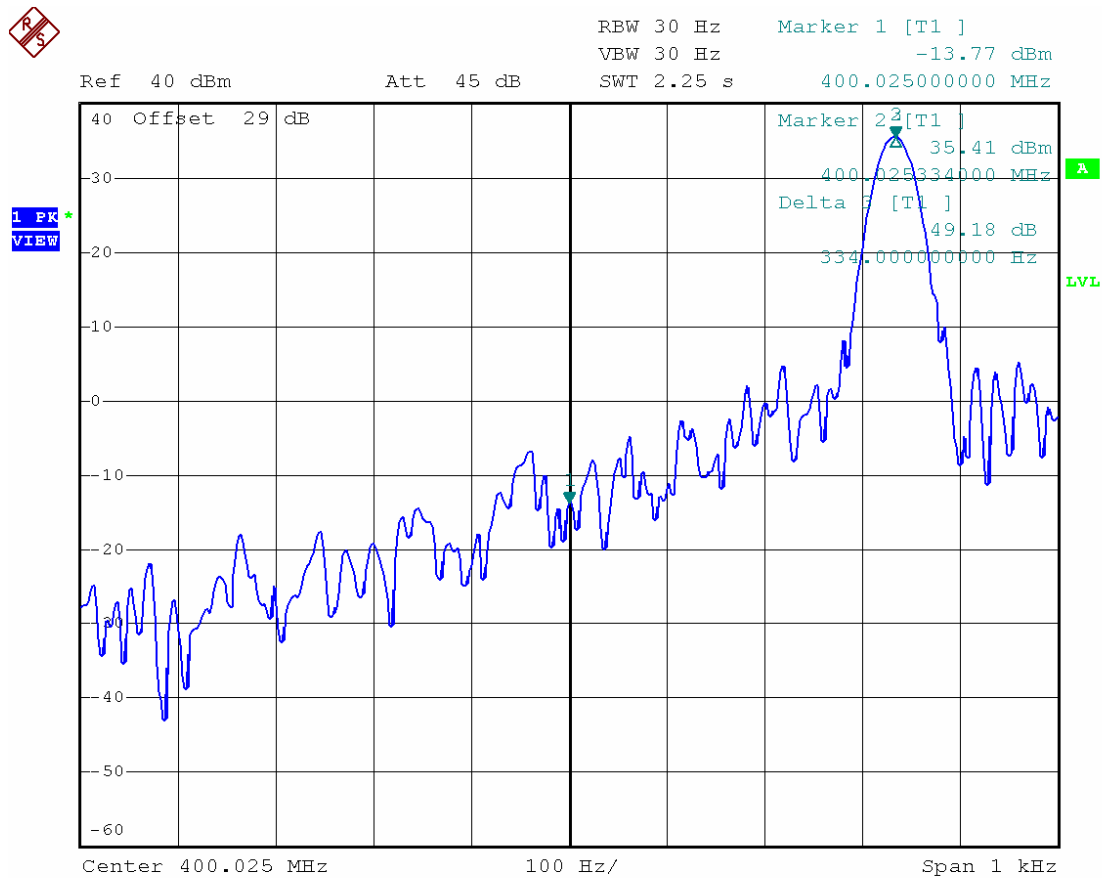

Date: 20.DEC.2007 20:52:35


5.10.6.6 Plot 4 (0°C)

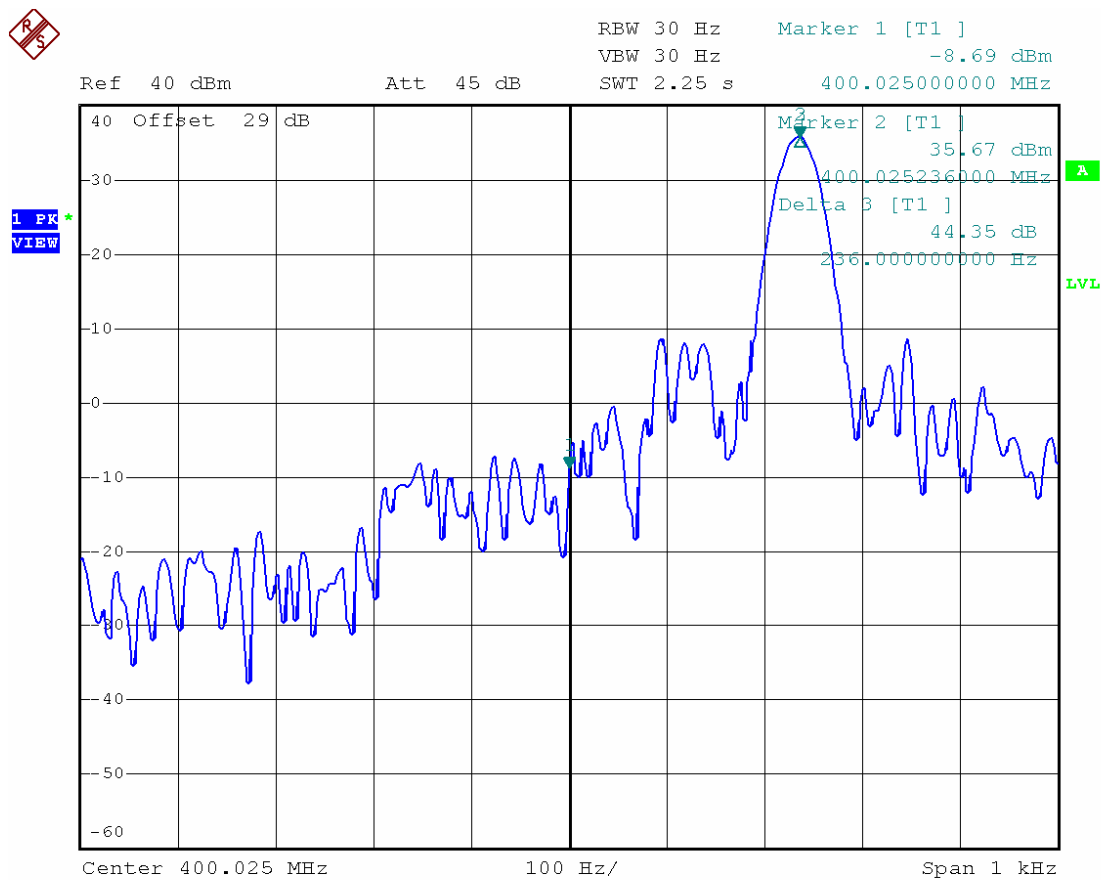

SL7402 / MaxonCIC

Date: 20.DEC.2007 19:52:10


5.10.6.7 Plot 5 (+10°C)

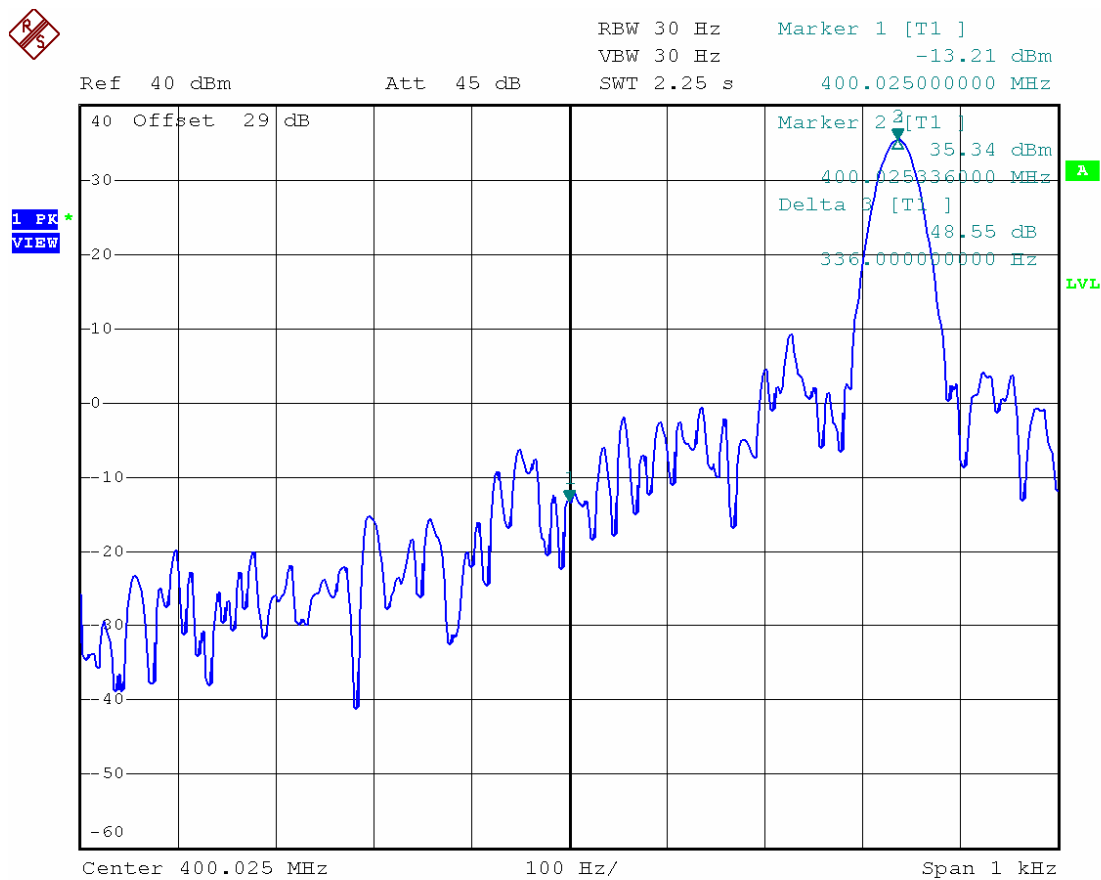

SL7402 / MaxonCIC

Date: 20.DEC.2007 21:12:10


5.10.6.8 Plot 6 (+20°C)

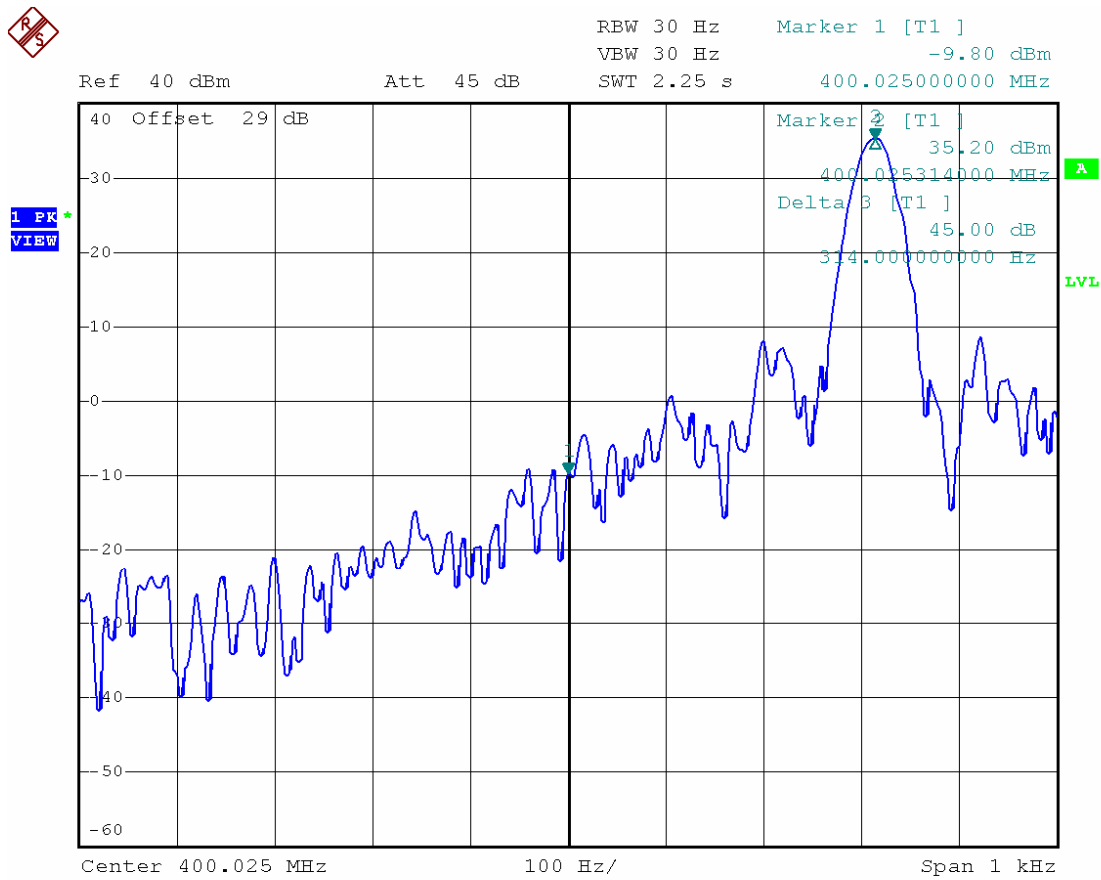

SL7402 / MaxonCIC

Date: 20.DEC.2007 21:50:01


5.10.6.9 Plot 7 (+30°C)

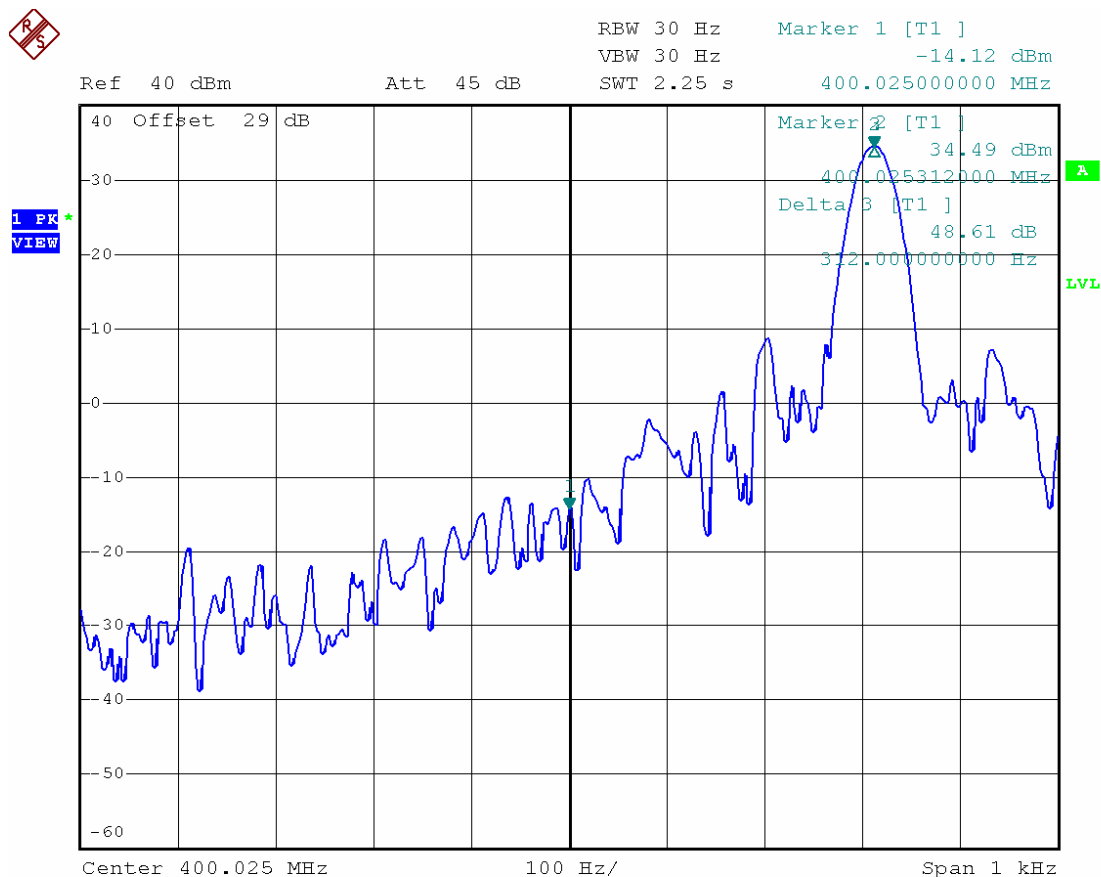

SL7402 / MaxonCIC

Date: 20.DEC.2007 22:06:27


5.10.6.11 Plot 9 (+50°C)

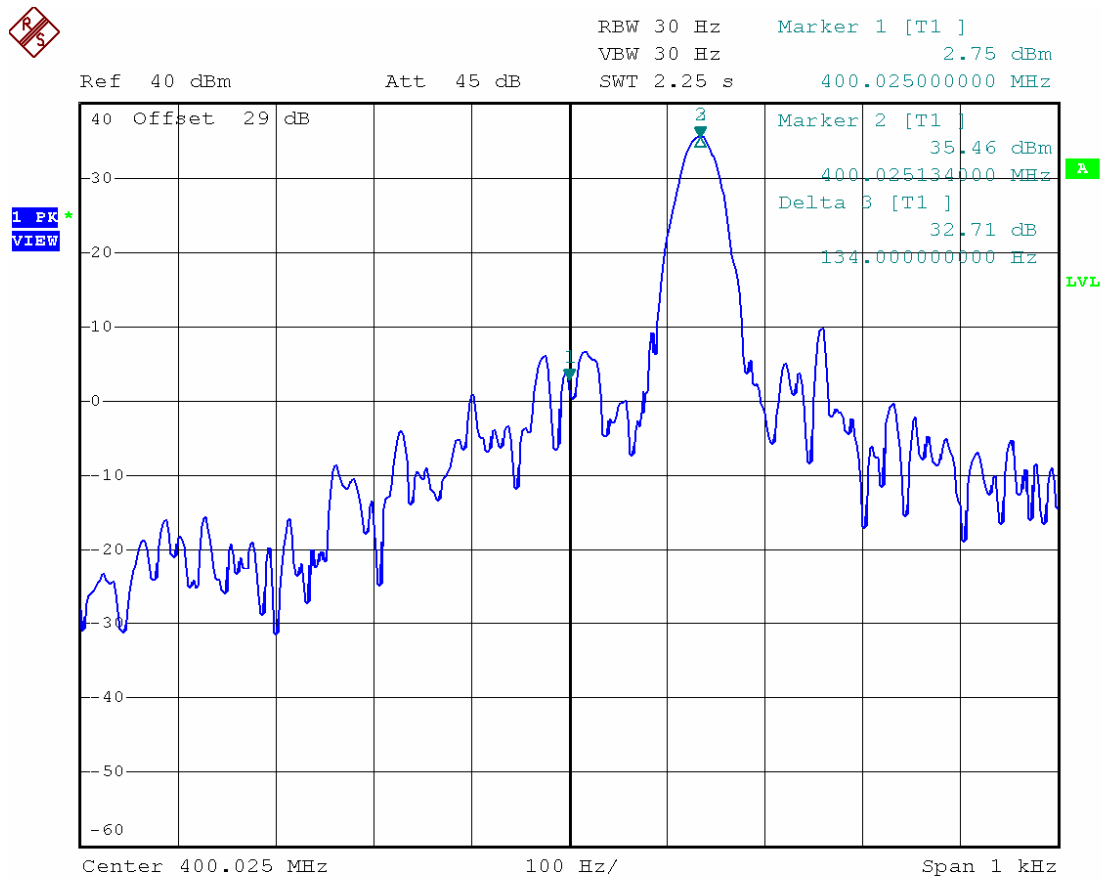

SL7402 / MaxonCIC

Date: 20.DEC.2007 23:08:50


5.10.6.12 Plot 10 (+60°C)

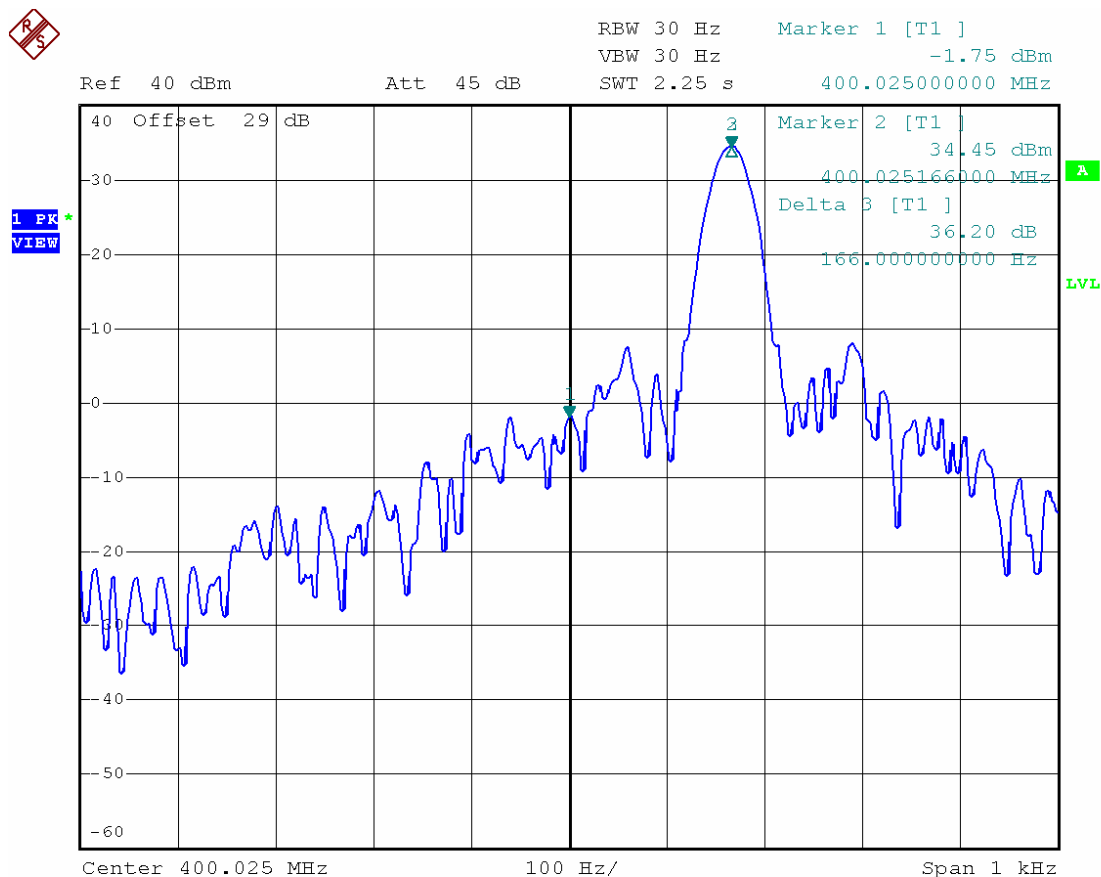

SL7402 / MaxonCIC

Date: 20.DEC.2007 23:54:06


5.10.6.13 Plot 11 (20°C, 6.29V)

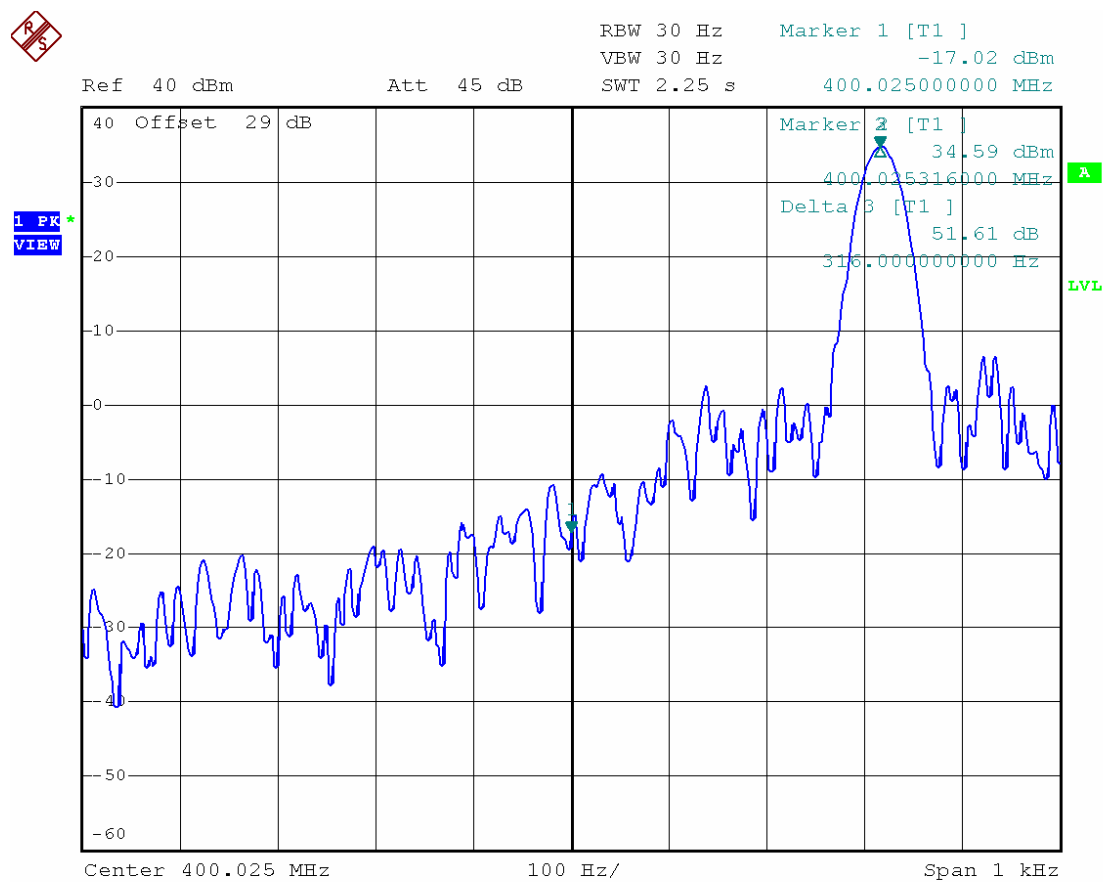

SL7402 / MaxonCIC

Date: 20.DEC.2007 21:50:45

5.10.6.14 Plot 12 (20°C, 8.51V)

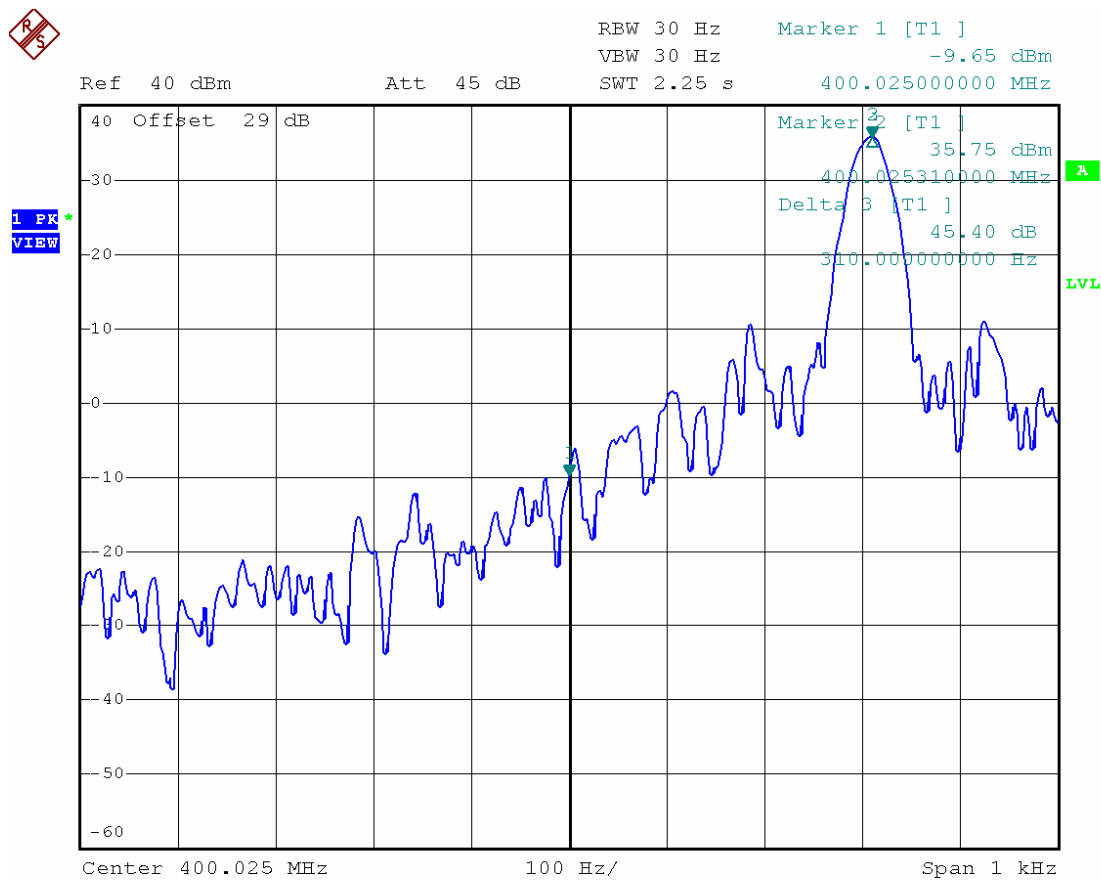

SL7402 / MaxonCIC

Date: 20.DEC.2007 21:49:08


5.10.7 Test Result 2

FCC Rules :	Part 2 §2.1055 & §90.231
IC Rules :	RSS-119 Section 7.0
Operating Frequency :	423.025 MHz
Channel :	2nd Channel
Power Output :	4 Watts
Modulation :	Non-Modulation
Reference Voltage :	7.4 VDC


5.10.7.1 Data

Voltage (%)	Power Supply (Vdc)	Temperature (°C)	Frequency (Hz)	Deviation (ppm)	Limit (ppm)
100 %	7.4	-30	423.025158	-0.402	2.5
100 %	7.4	-20	423.025192	-0.321	2.5
100 %	7.4	-10	423.025256	-0.170	2.5
100 %	7.4	0	423.025338	+0.024	2.5
100 %	7.4	+10	423.025374	+0.109	2.5
100 %	7.4	+20 (ref)	423.025328	0	2.5
100 %	7.4	+30	423.025320	-0.019	2.5
100 %	7.4	+40	423.025186	-0.336	2.5
100 %	7.4	+50	423.025146	-0.430	2.5
100 %	7.4	+60	423.025150	-0.421	2.5
85 %	6.29	+20	423.025332	+0.009	2.5
115 %	8.51	+20	423.025326	-0.005	2.5

5.10.7.2 Graph

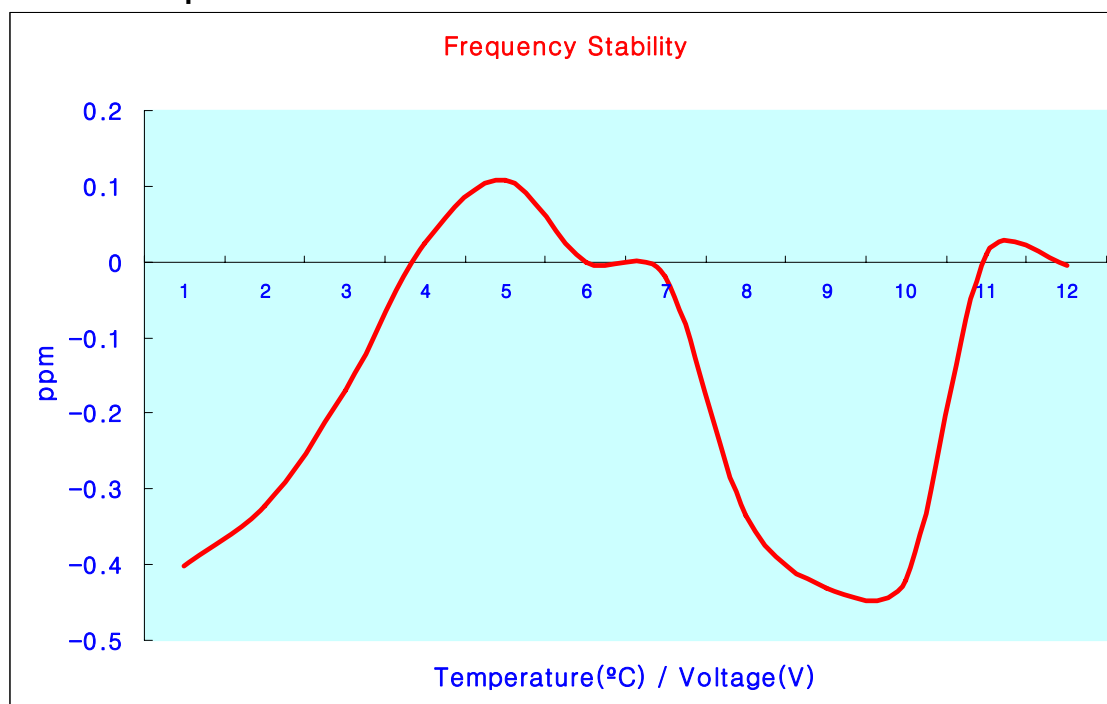


5.10.7.3 Plot 1 (-30°C)

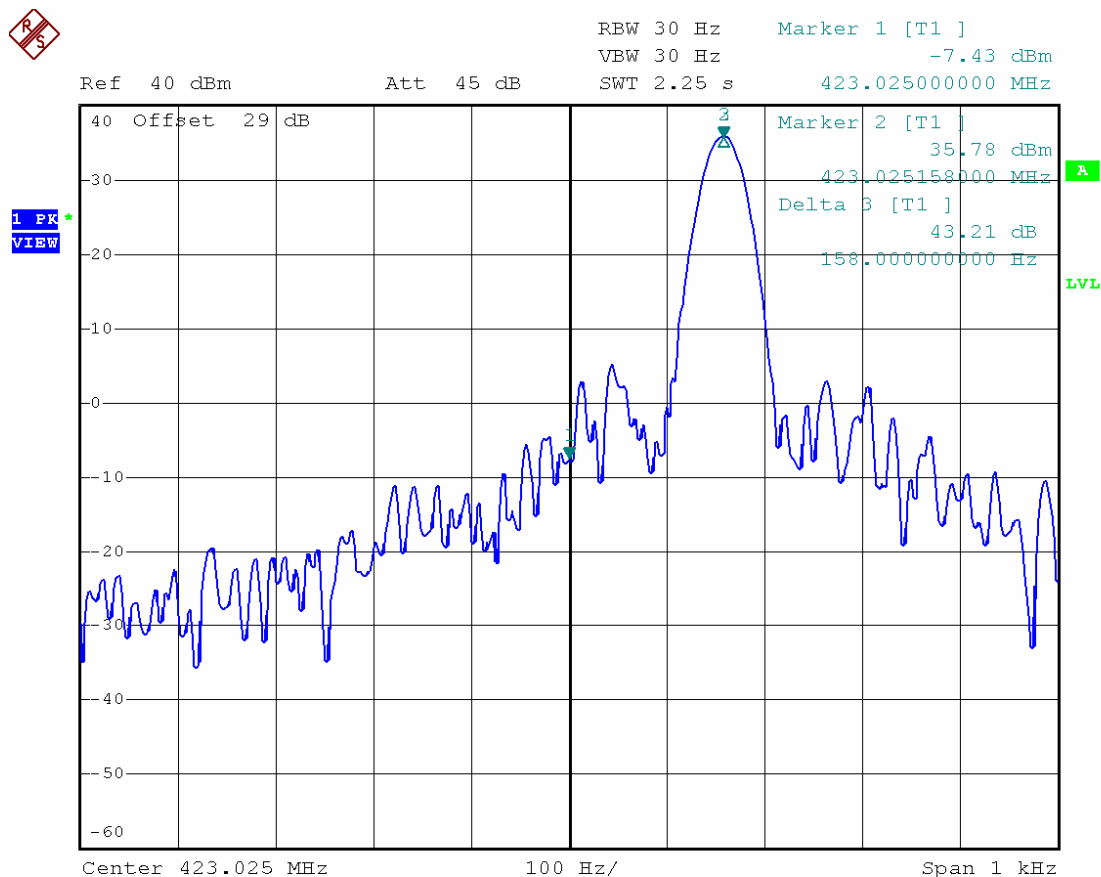

SL7402 / MaxonCIC

Date: 20.DEC.2007 18:29:36


5.10.7.4 Plot 2 (-20°C)

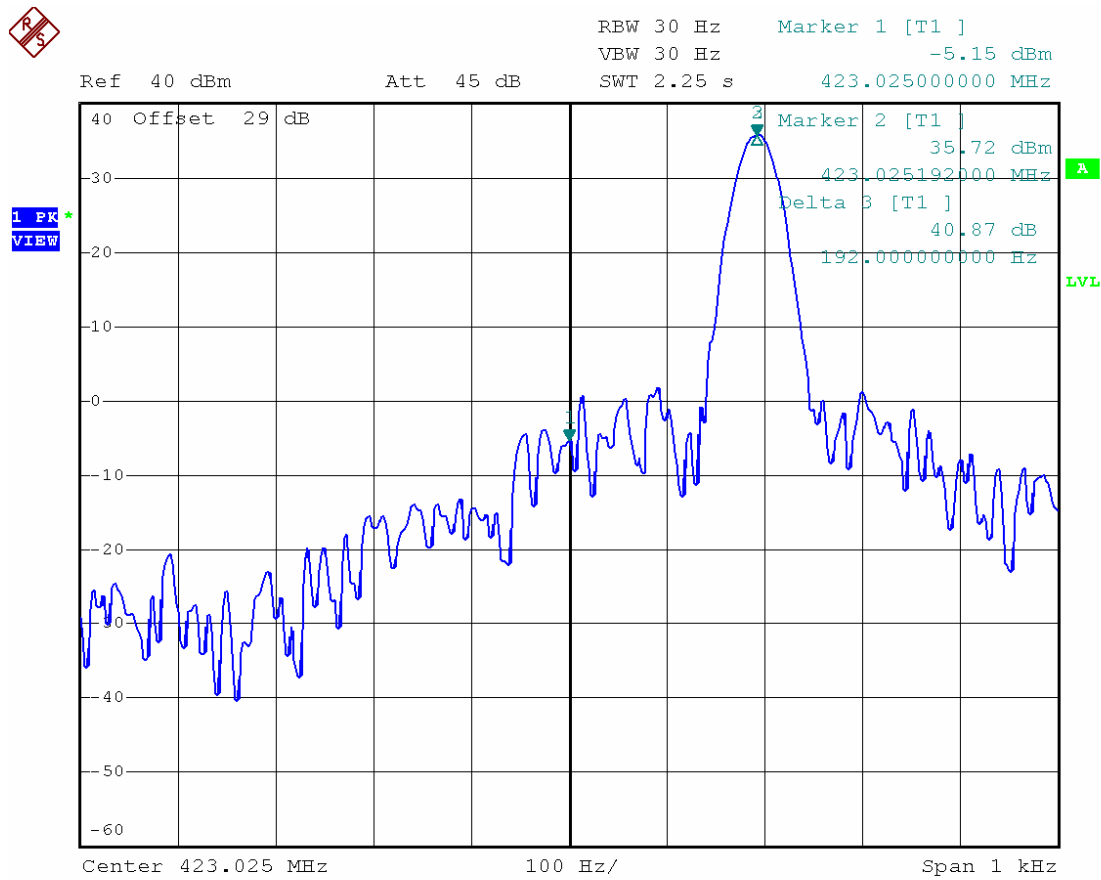

SL7402 / MaxonCIC


Date: 20.DEC.2007 18:47:32

5.10.7.5 Plot 3 (-10°C)

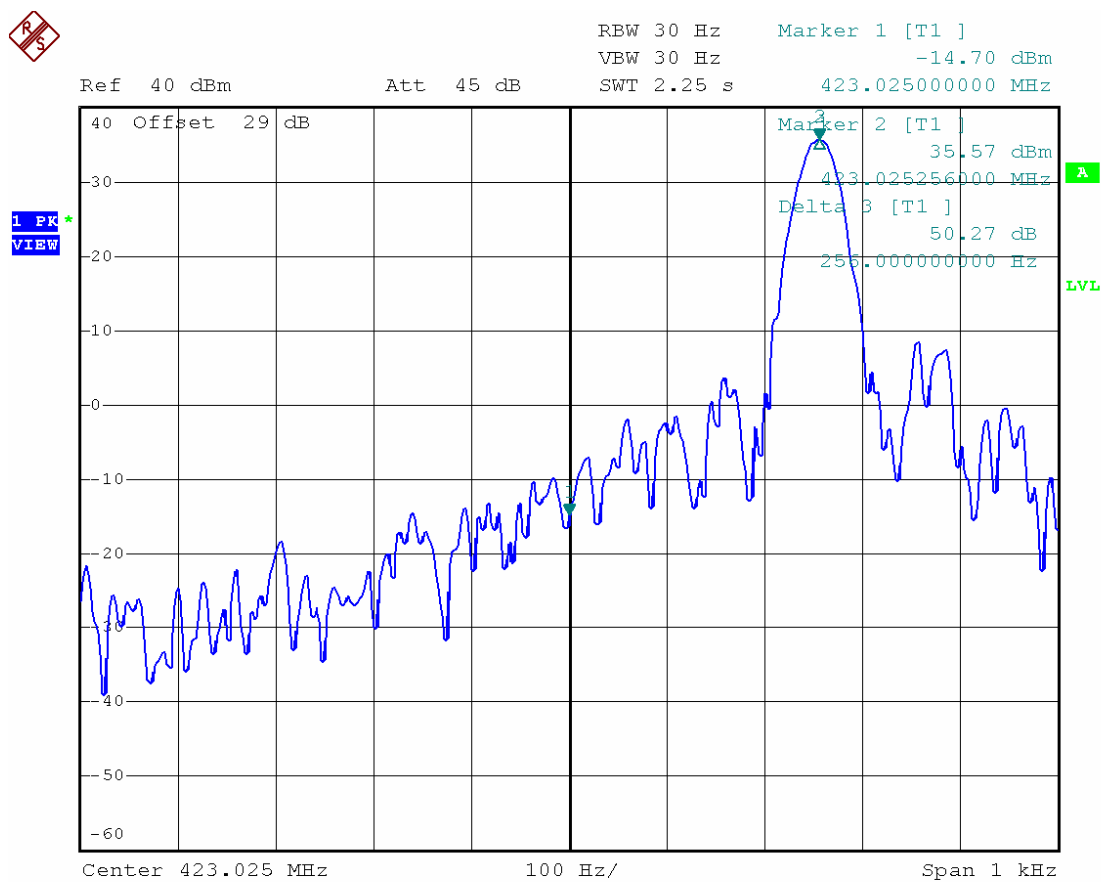


SL7402 / MaxonCIC

Date: 20.DEC.2007 19:53:16

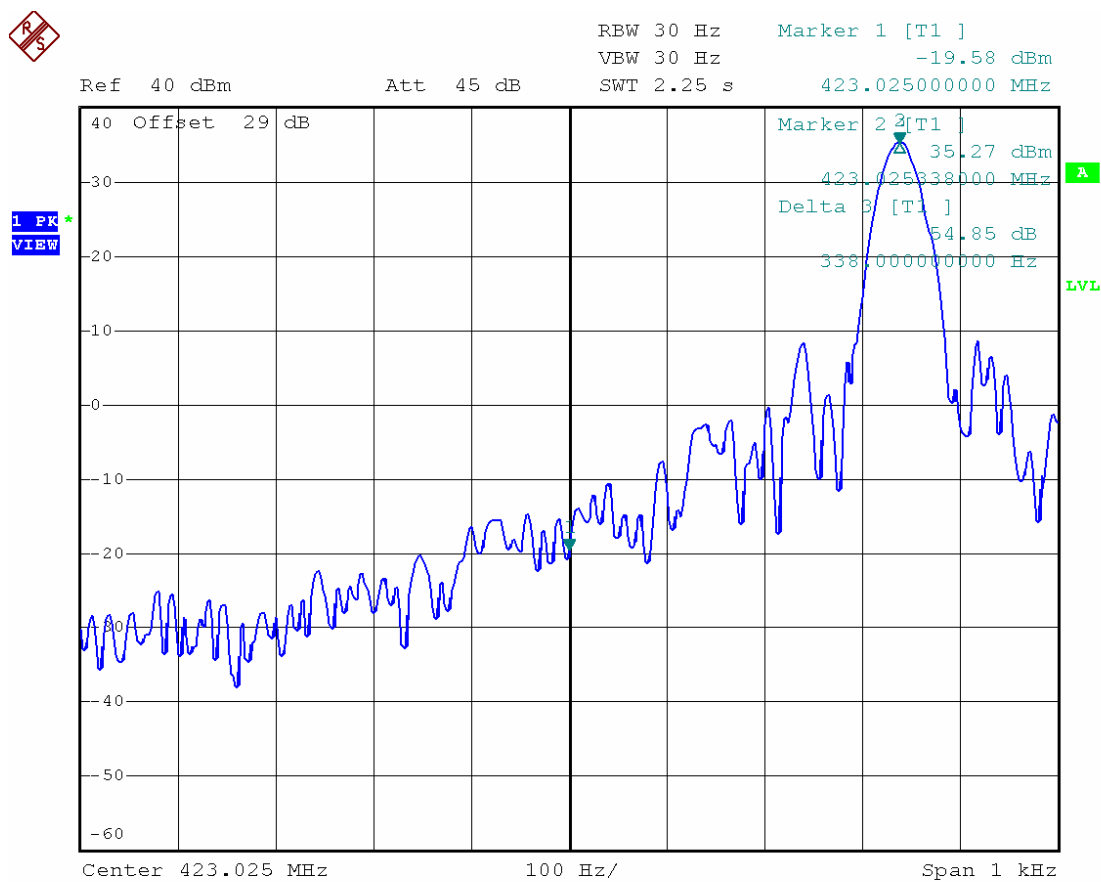


Date: 20.DEC.2007 20:45:21

5.10.7.7 Plot 5 (+10°C)

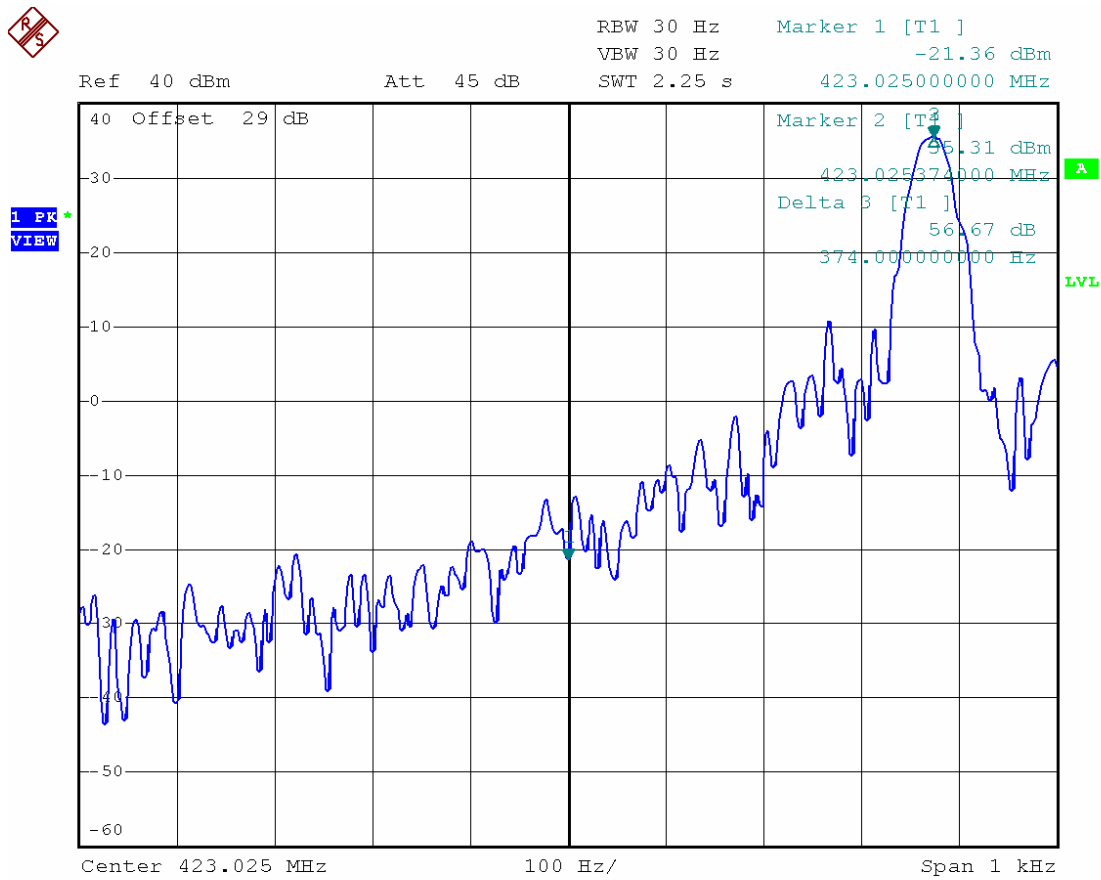


SL7402 / MaxonCIC

Date: 20.DEC.2007 21:18:44

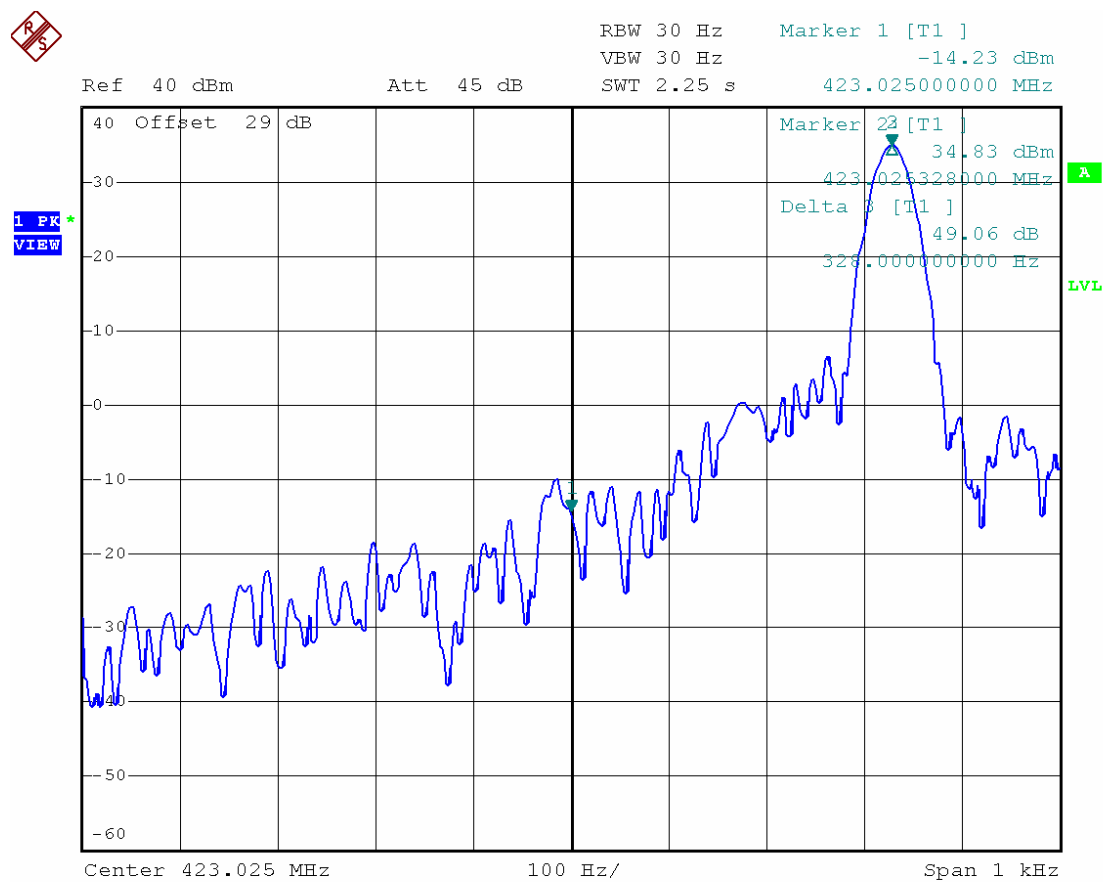

Date: 20.DEC.2007 21:42:37


5.10.7.9 Plot 7 (+30°C)

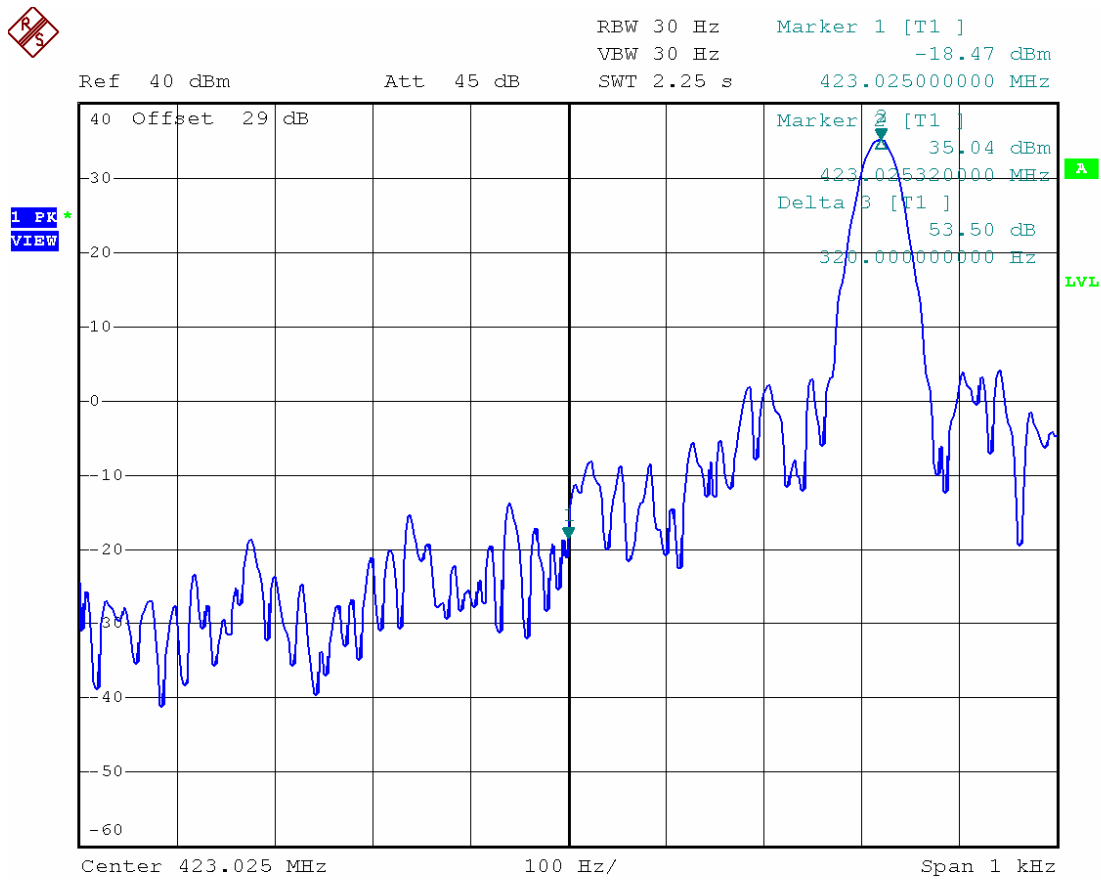

SL7402 / MaxonCIC

Date: 20.DEC.2007 22:07:31


5.10.7.10 Plot 8 (+40°C)

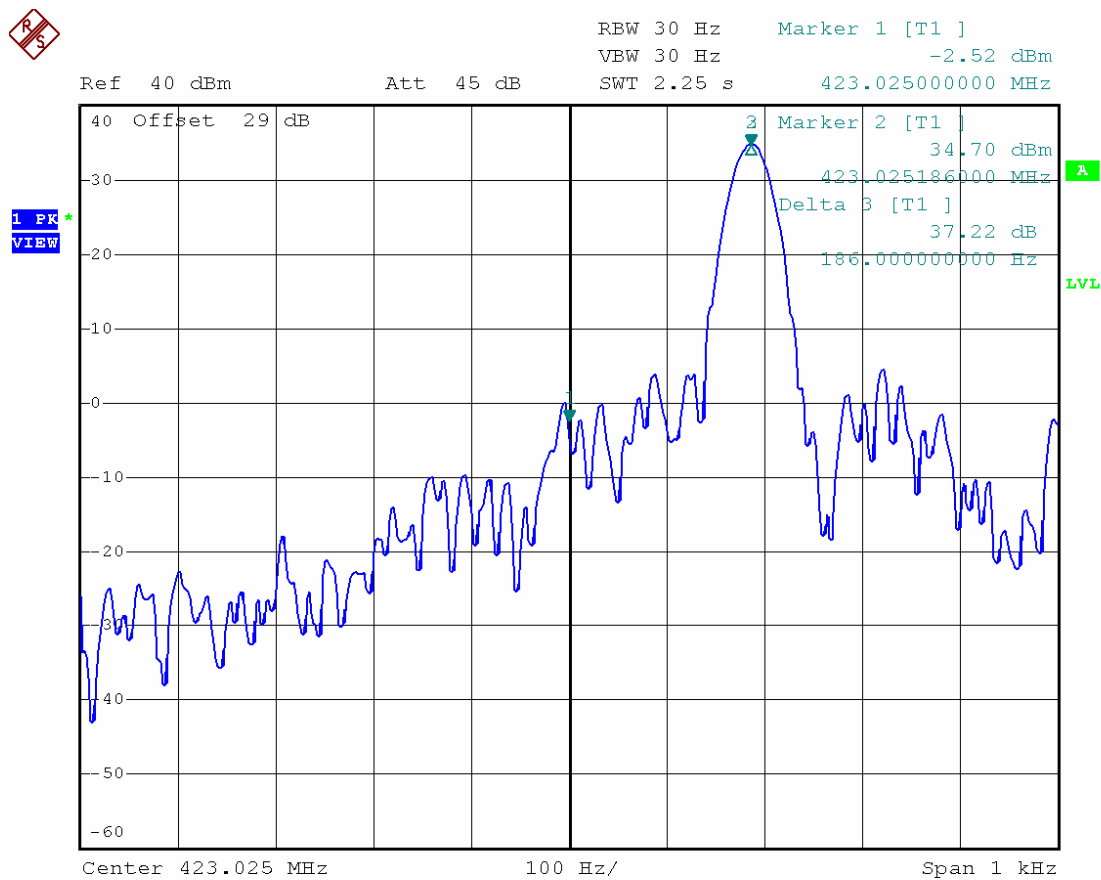

SL7402 / MaxonCIC

Date: 20.DEC.2007 22:44:09


5.10.7.11 Plot 9 (+50°C)

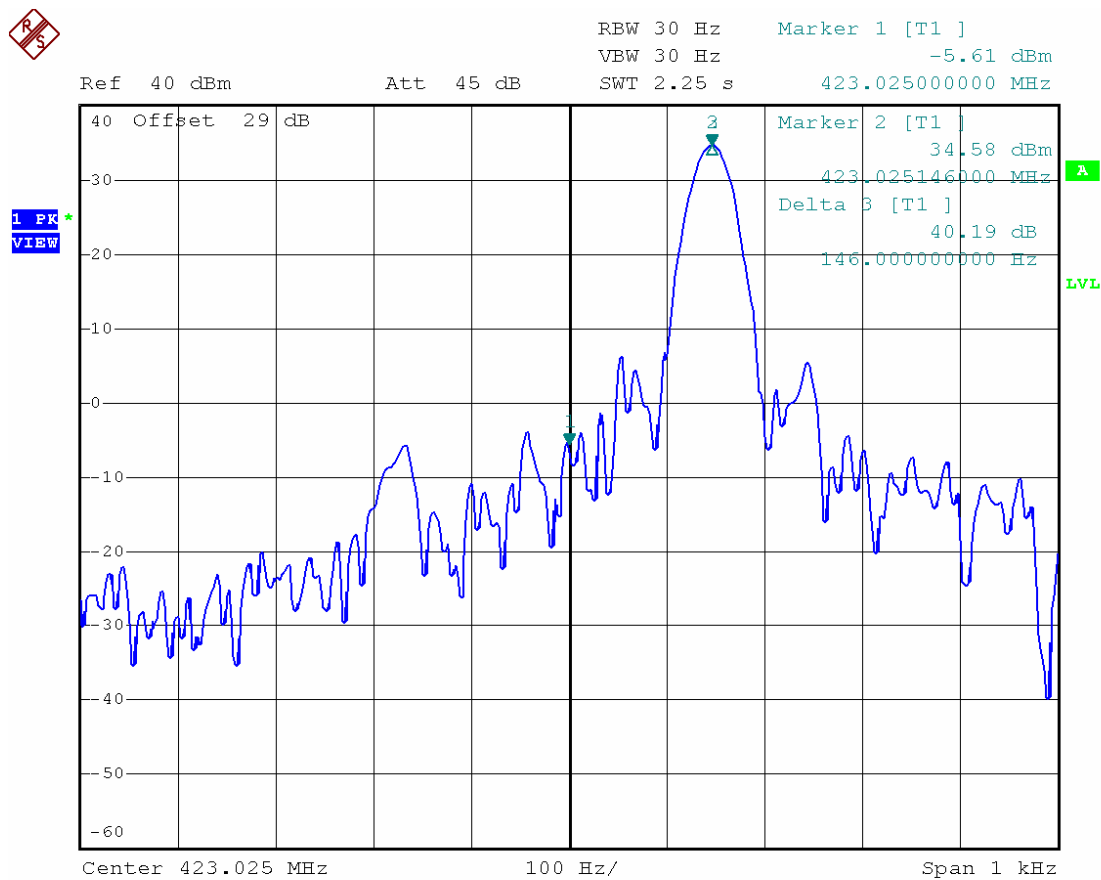

SL7402 / MaxonCIC

Date: 20.DEC.2007 23:09:50


5.10.7.12 Plot 10 (+60°C)

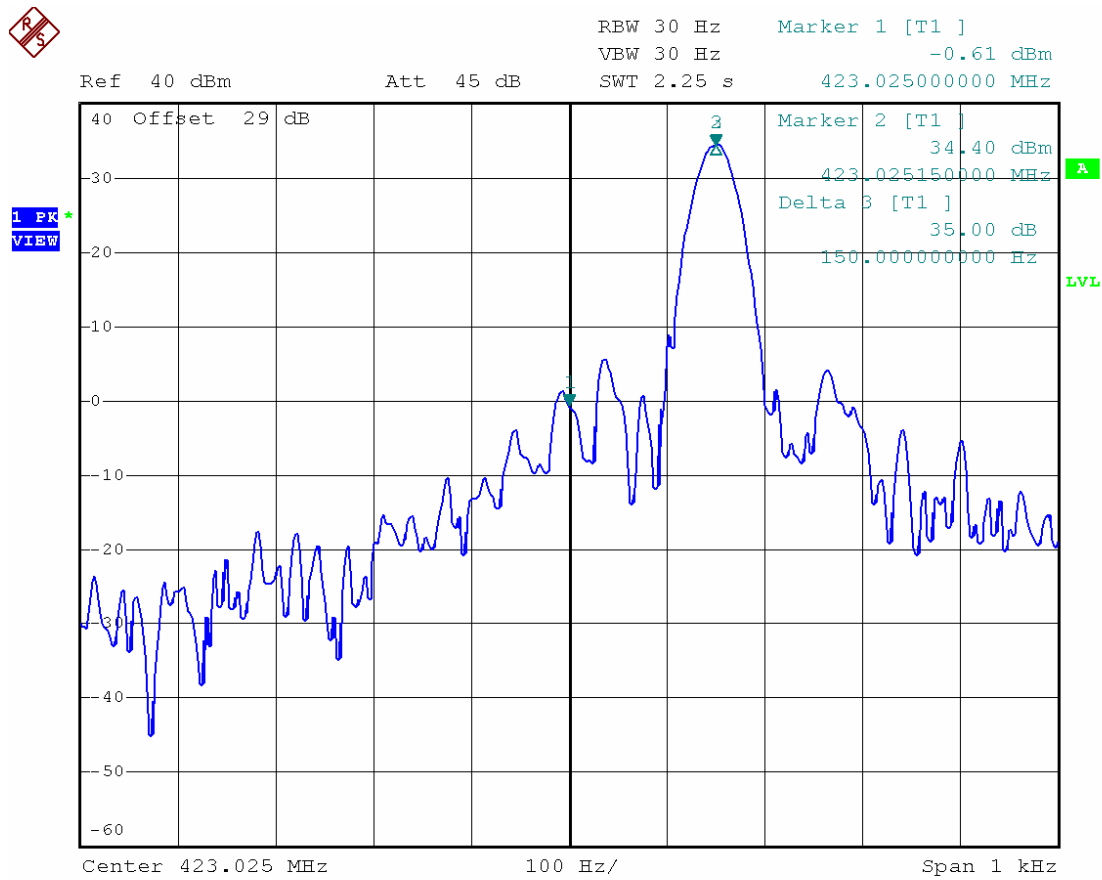

SL7402 / MaxonCIC

Date: 20.DEC.2007 23:48:43


5.10.7.13 Plot 11 (20°C, 6.29V)

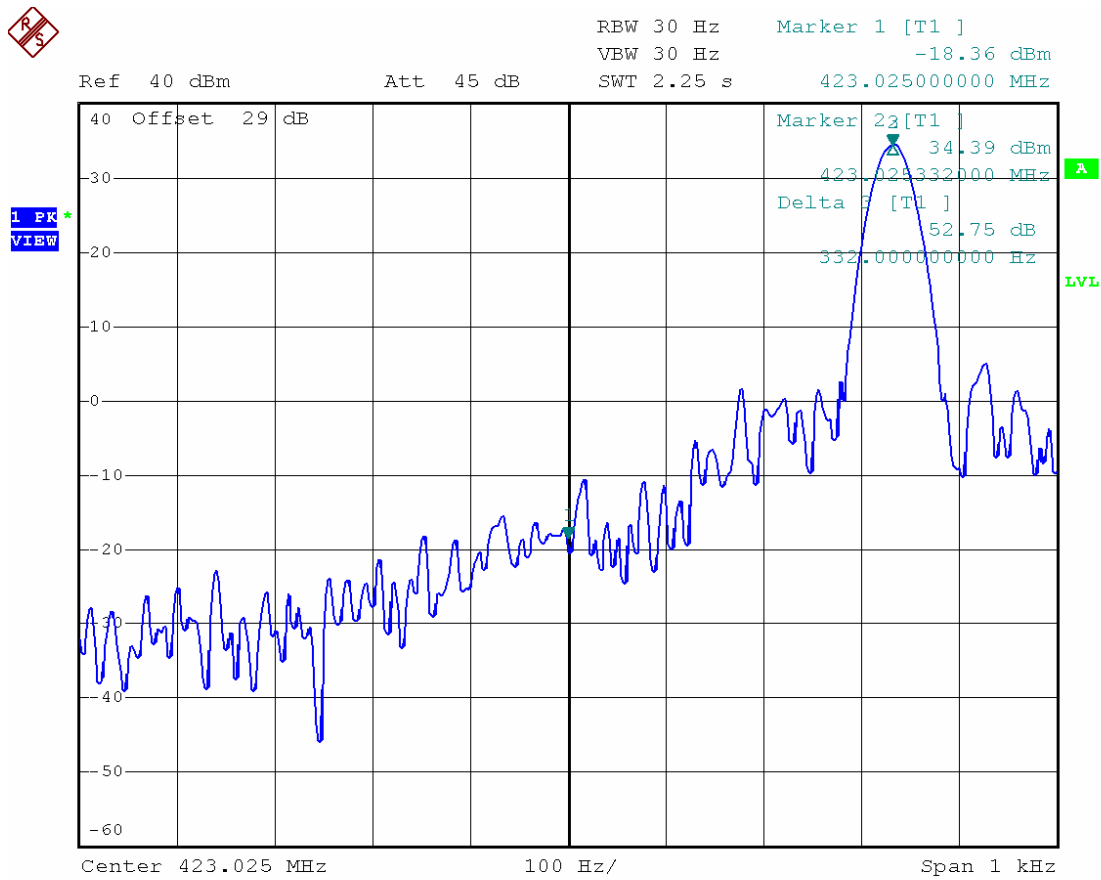

SL7402 / MaxonCIC

Date: 20.DEC.2007 21:43:14

5.10.7.14 Plot 12 (20°C, 8.51V)

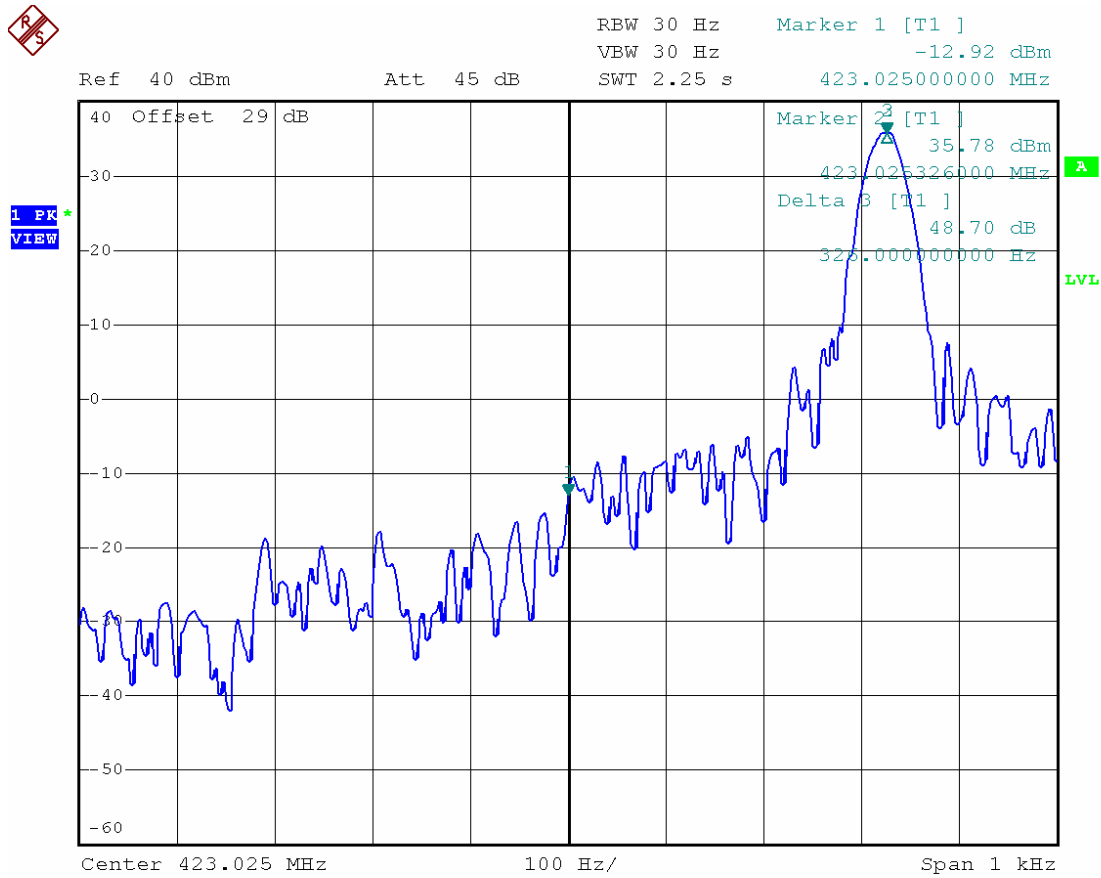

SL7402 / MaxonCIC

Date: 20.DEC.2007 21:43:38


5.10.8 Test Result 3

FCC Rules :	Part 2 §2.1055 & §90.231
IC Rules :	RSS-119 Section 7.0
Operating Frequency :	446.025 MHz
Channel :	3rd Channel
Power Output :	4 Watts
Modulation :	Non-Modulation
Reference Voltage :	7.4 VDC


5.10.8.1 Data

Voltage (%)	Power Supply (Vdc)	Temperature (°C)	Frequency (Hz)	Deviation (ppm)	Limit (ppm)
100 %	7.4	-30	446.025178	-0.386	2.5
100 %	7.4	-20	446.025192	-0.354	2.5
100 %	7.4	-10	446.025272	-0.175	2.5
100 %	7.4	0	446.025356	+0.013	2.5
100 %	7.4	+10	446.025398	+0.108	2.5
100 %	7.4	+20 (ref)	446.025350	0	2.5
100 %	7.4	+30	446.025332	-0.040	2.5
100 %	7.4	+40	446.025202	-0.332	2.5
100 %	7.4	+50	446.025154	-0.439	2.5
100 %	7.4	+60	446.025180	-0.381	2.5
85 %	6.29	+20	446.025352	+0.005	2.5
115 %	8.51	+20	446.025362	+0.027	2.5

5.10.8.2 Graph

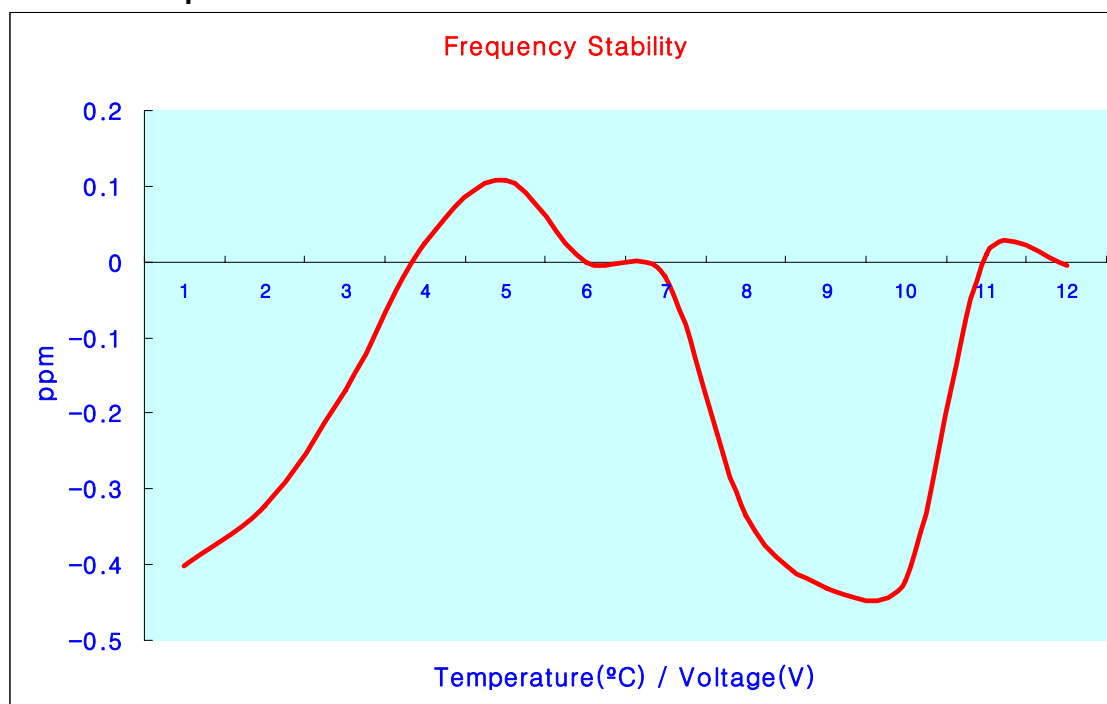


5.10.8.3 Plot 1 (-30°C)

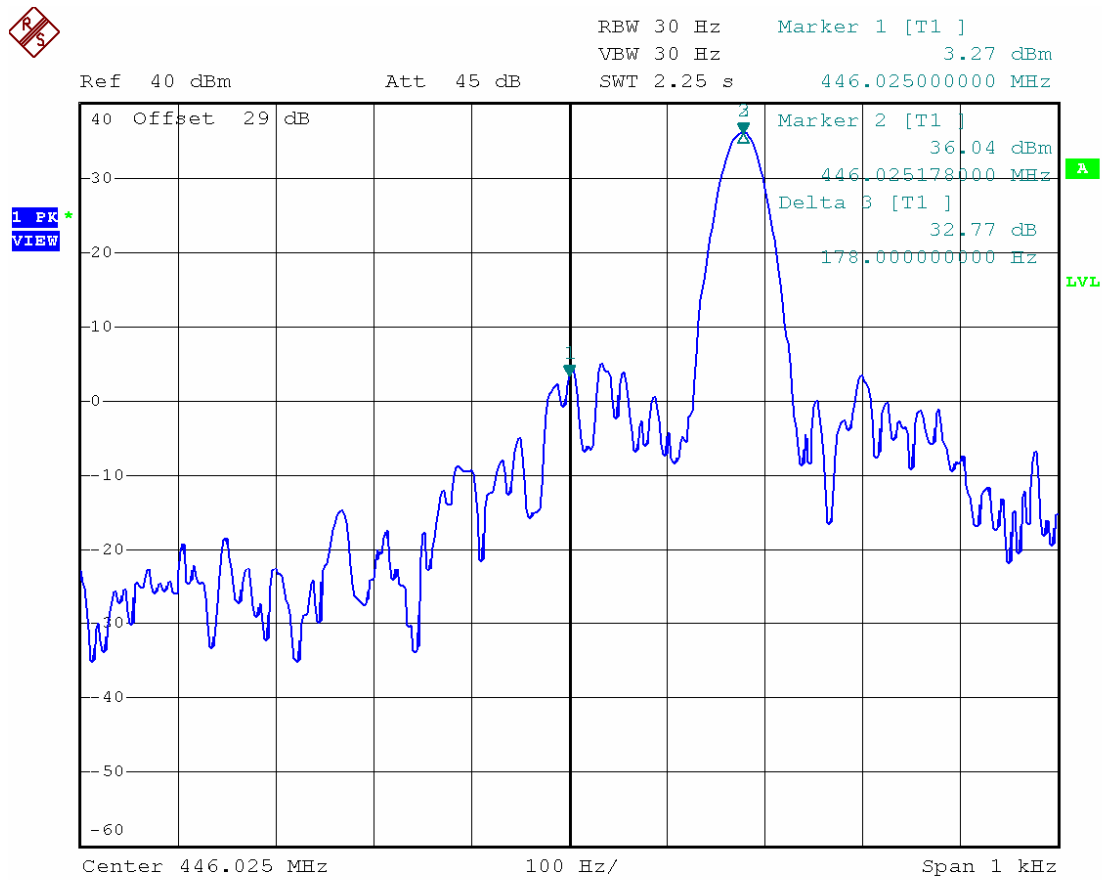

SL7402 / MaxonCIC


Date: 20.DEC.2007 18:31:14

5.10.8.4 Plot 2 (-20°C)

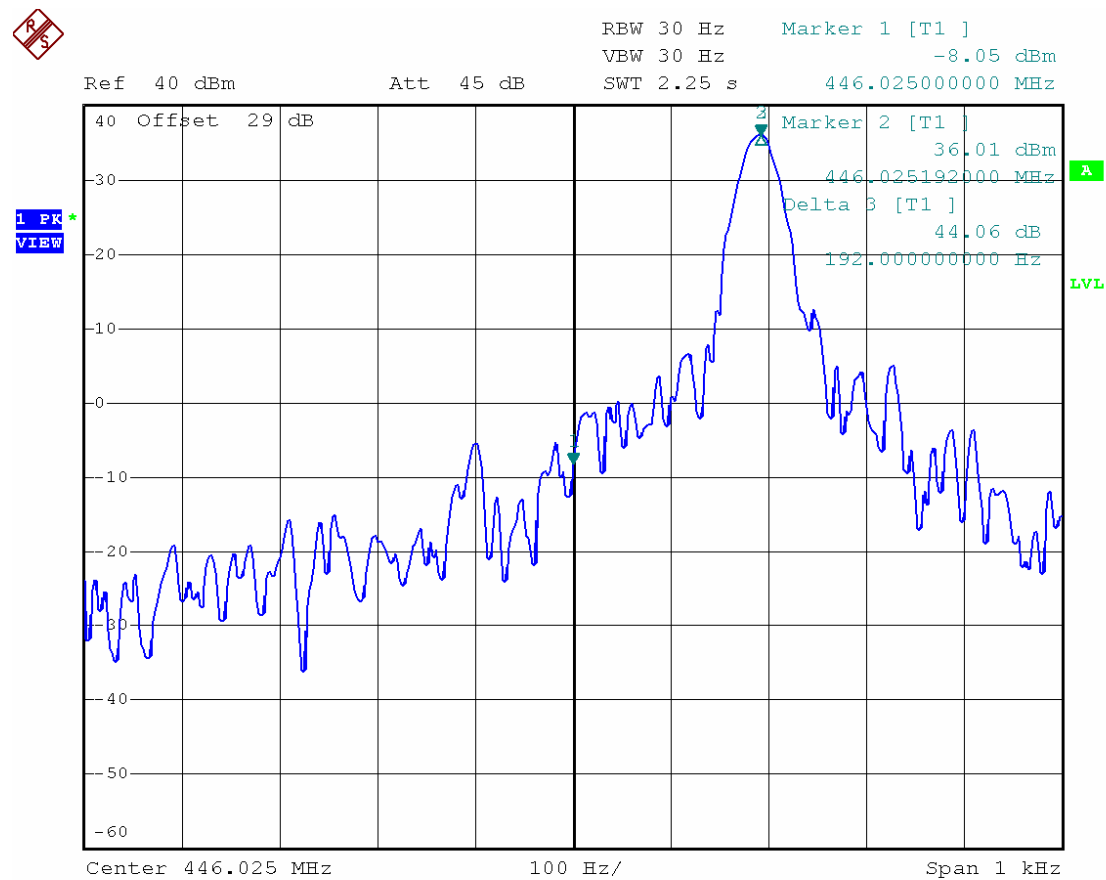


SL7402 / MaxonCIC

Date: 20.DEC.2007 18:46:45

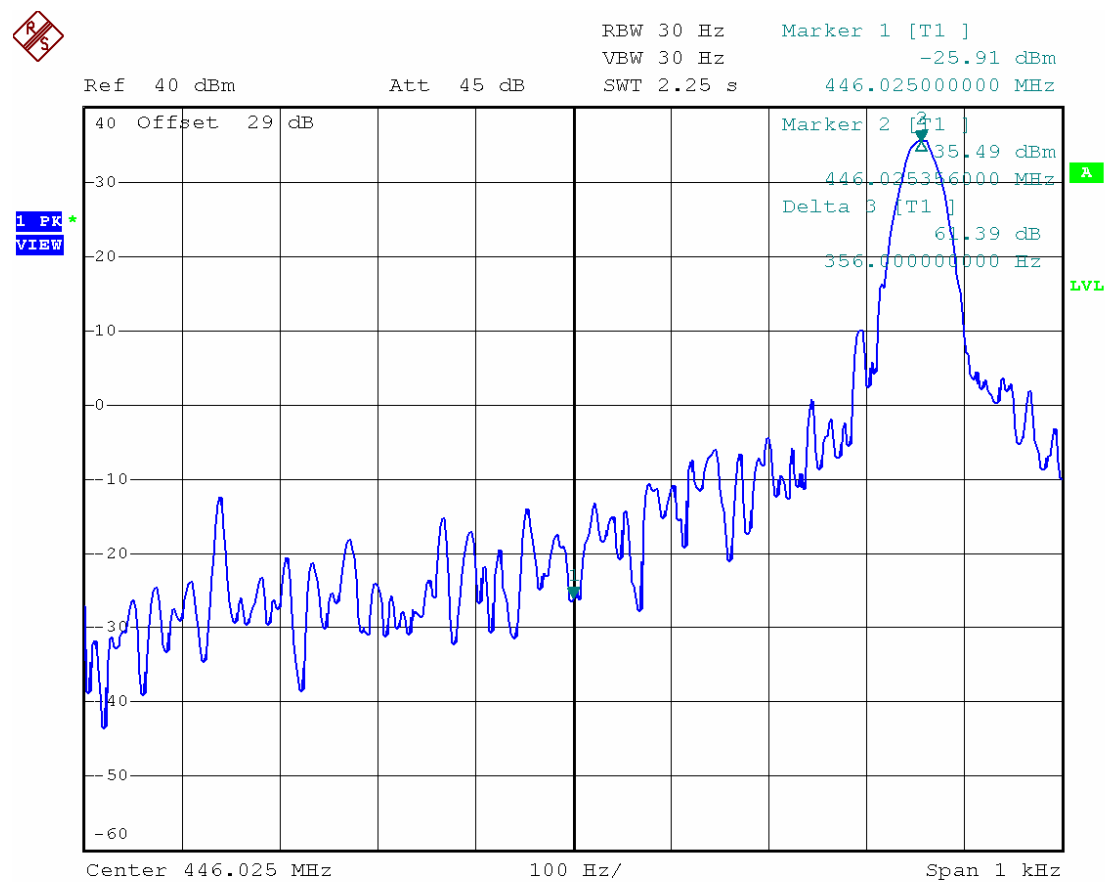

Date: 20.DEC.2007 20:41:57


5.10.8.7 Plot 5 (+10°C)

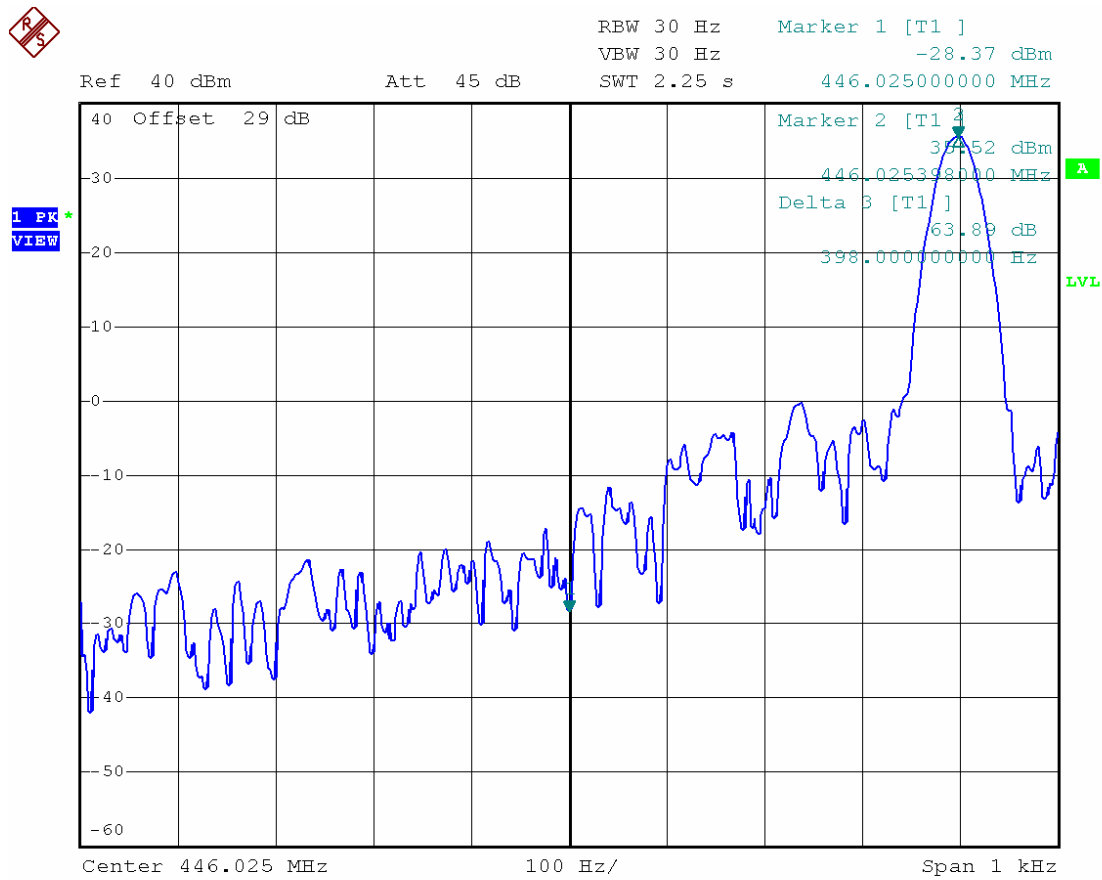

SL7402 / MaxonCIC


Date: 20.DEC.2007 21:19:36

5.10.8.8 Plot 6 (+20°C)

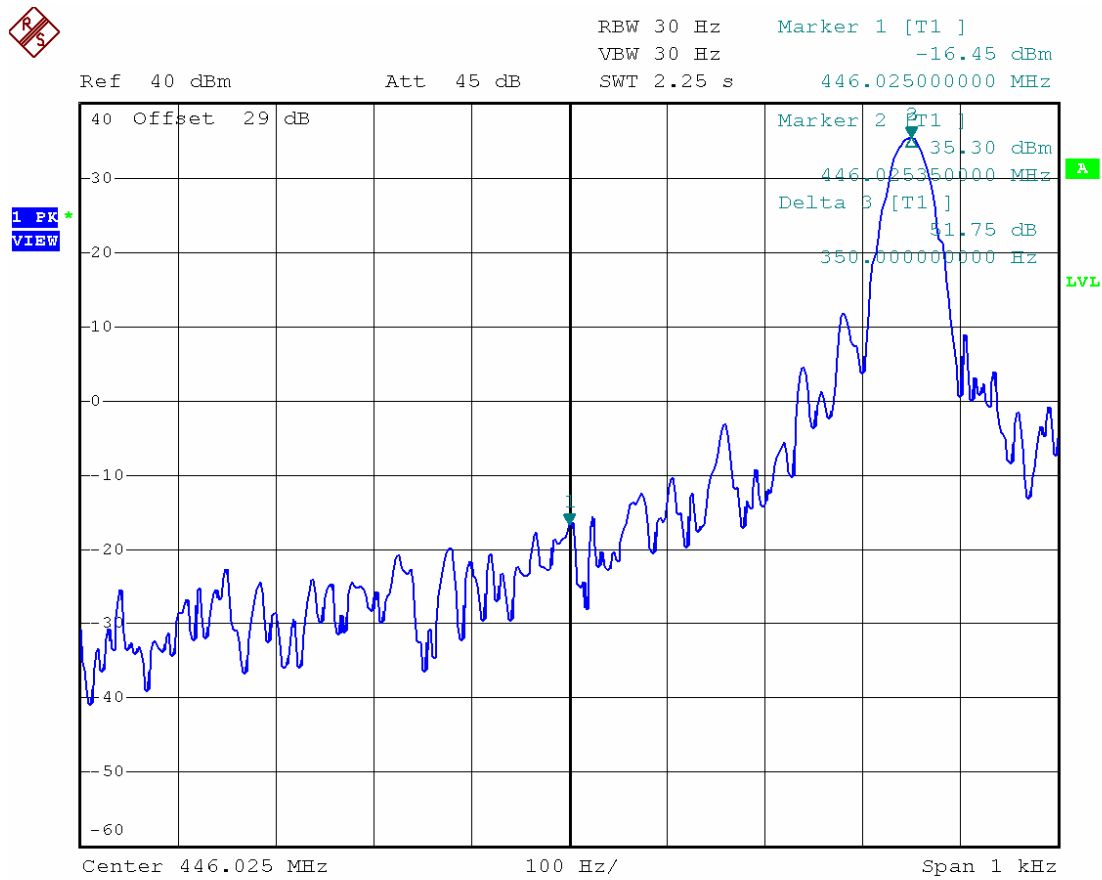


SL7402 / MaxonCIC

Date: 20.DEC.2007 21:41:47

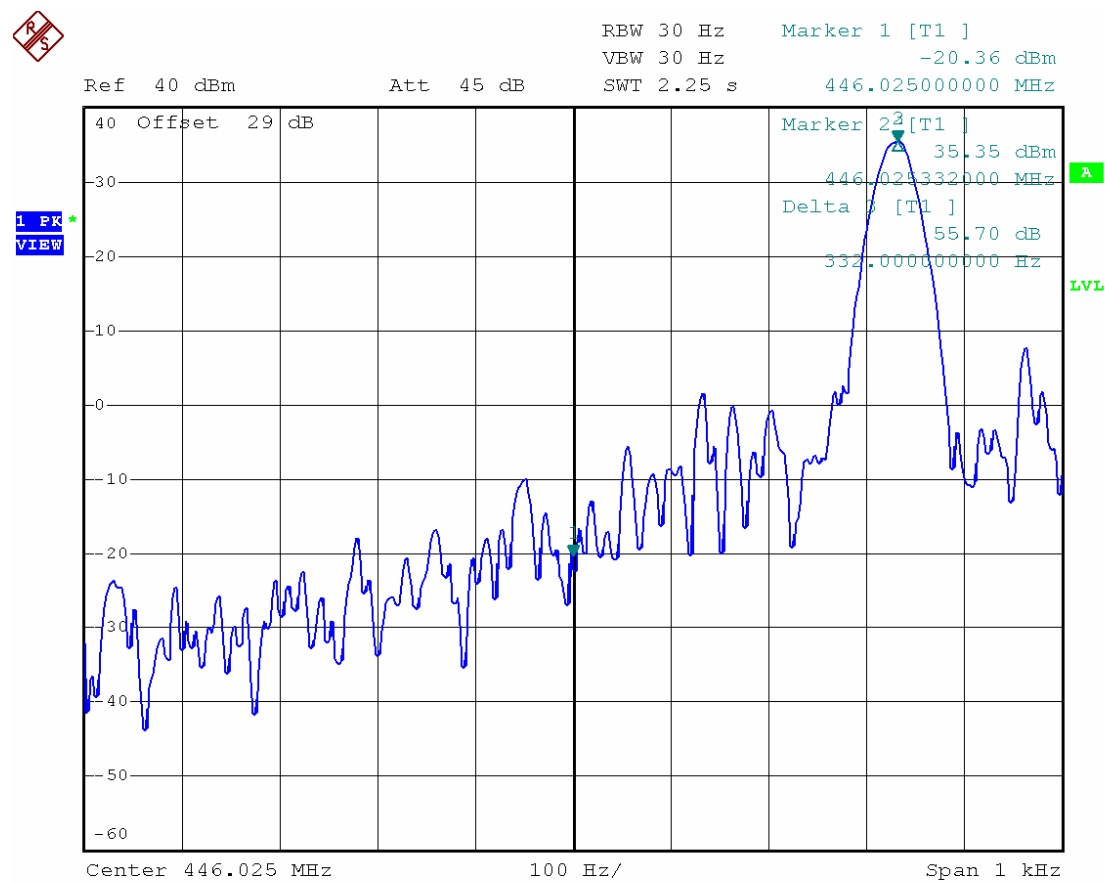

Date: 20.DEC.2007 22:08:26


5.10.8.11 Plot 9 (+50°C)

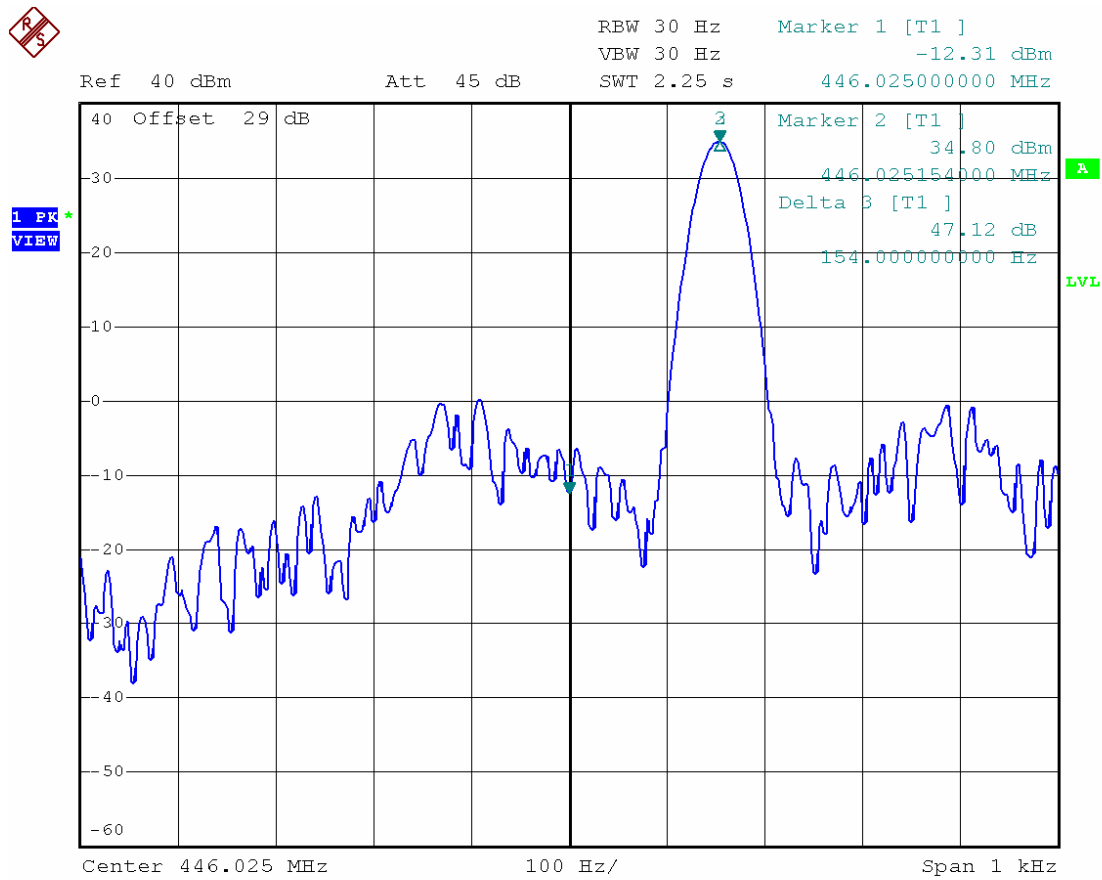

SL7402 / MaxonCIC

Date: 20.DEC.2007 23:10:42


5.10.8.12 Plot 10 (+60°C)

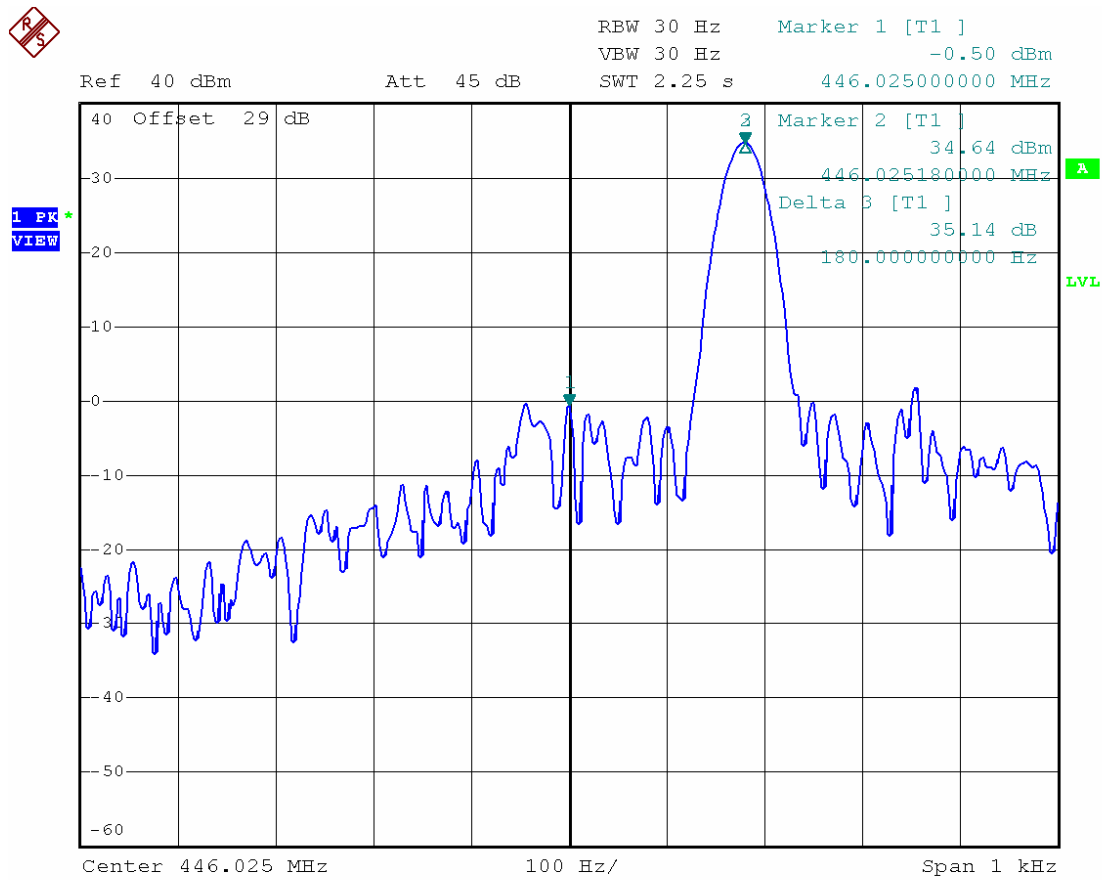

SL7402 / MaxonCIC

Date: 20.DEC.2007 23:42:11


5.10.8.13 Plot 11 (20°C, 6.29V)

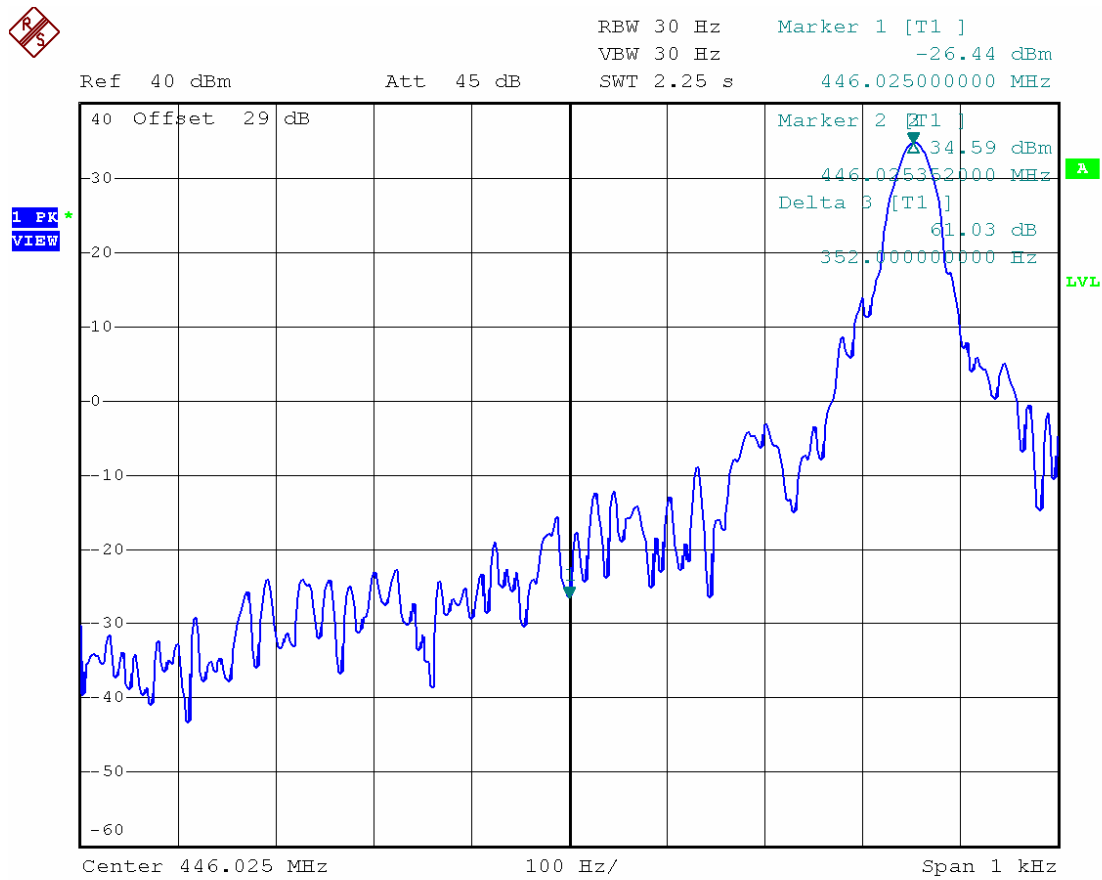

SL7402 / MaxonCIC

Date: 20.DEC.2007 21:41:18

5.10.8.14 Plot 12 (20°C, 8.51V)

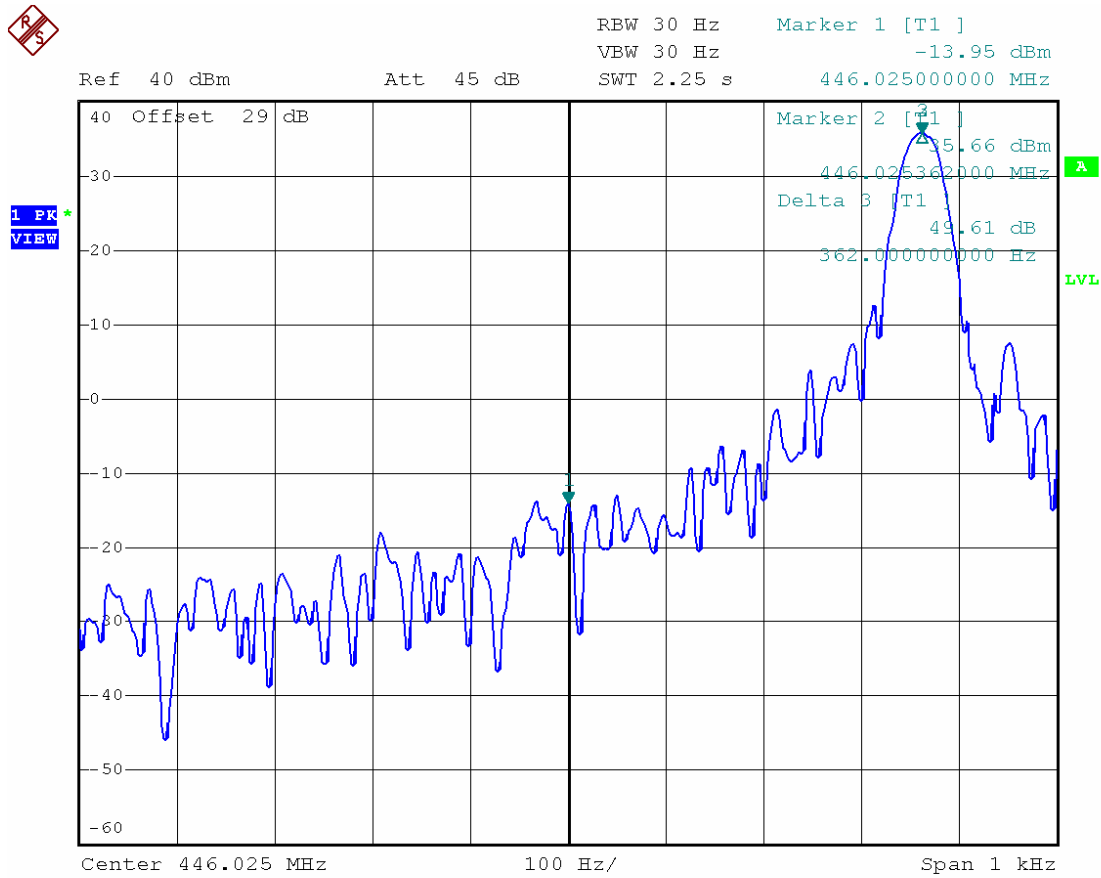

SL7402 / MaxonCIC

Date: 20.DEC.2007 21:40:50


5.10.9 Test Result 4

FCC Rules :	Part 2 §2.1055 & §90.231
IC Rules :	RSS-119 Section 7.0
Operating Frequency :	469.975 MHz
Channel :	4th Channel
Power Output :	4 Watts
Modulation :	Non-Modulation
Reference Voltage :	7.4 VDC


5.10.9.1 Data

Voltage (%)	Power Supply (Vdc)	Temperature (°C)	Frequency (Hz)	Deviation (ppm)	Limit (ppm)
100 %	7.4	-30	469.975192	-0.472	2.5
100 %	7.4	-20	469.975192	-0.472	2.5
100 %	7.4	-10	469.975286	-0.272	2.5
100 %	7.4	0	469.975320	-0.200	2.5
100 %	7.4	+10	469.975420	+0.013	2.5
100 %	7.4	+20 (ref)	469.975414	0	2.5
100 %	7.4	+30	469.975340	-0.157	2.5
100 %	7.4	+40	469.975238	-0.374	2.5
100 %	7.4	+50	469.975162	-0.536	2.5
100 %	7.4	+60	469.975158	-0.544	2.5
85 %	6.29	+20	469.975414	0	2.5
115 %	8.51	+20	469.975404	-0.021	2.5

5.10.9.2 Graph

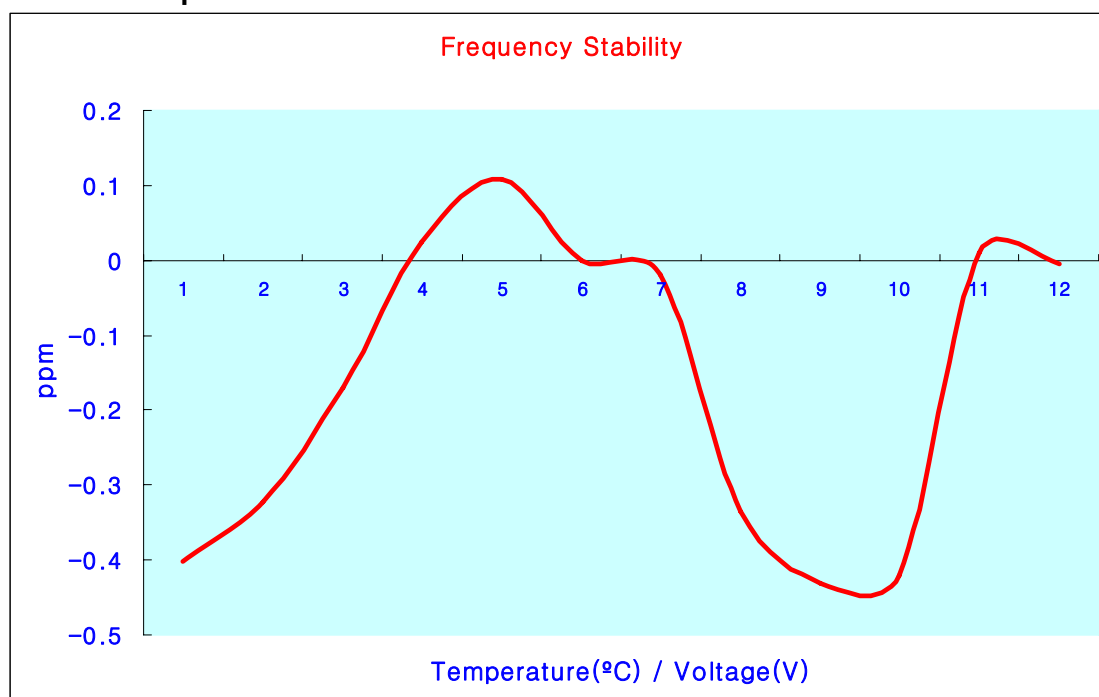


5.10.9.3 Plot 1 (-30°C)

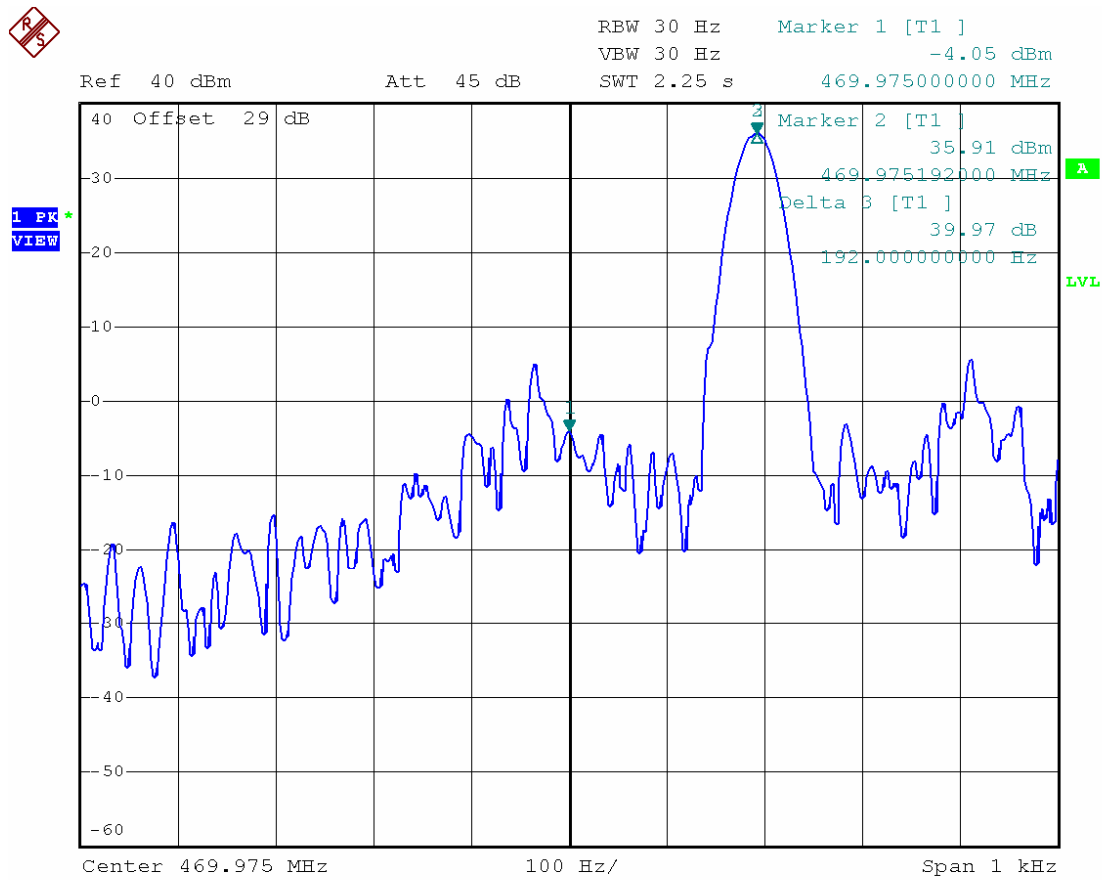

SL7402 / MaxonCIC


Date: 20.DEC.2007 18:32:05

5.10.9.4 Plot 2 (-20°C)

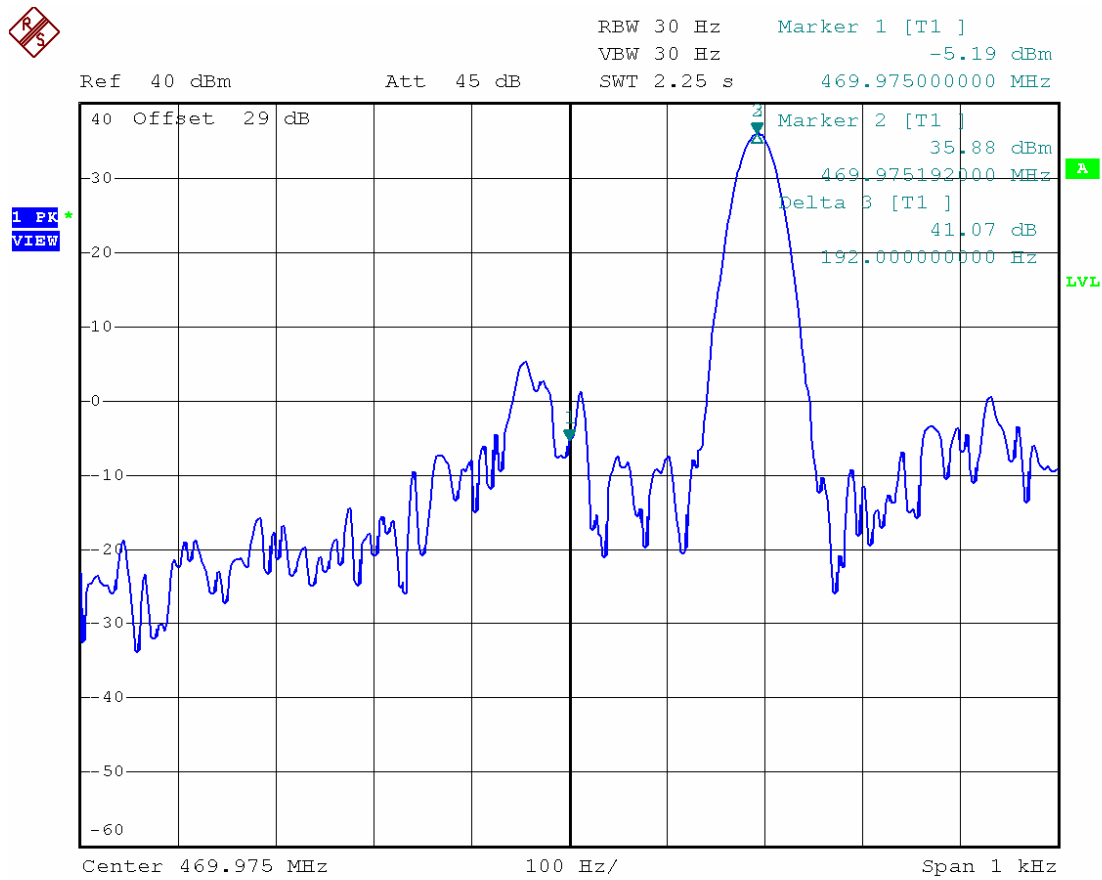


SL7402 / MaxonCIC

Date: 20.DEC.2007 18:45:48

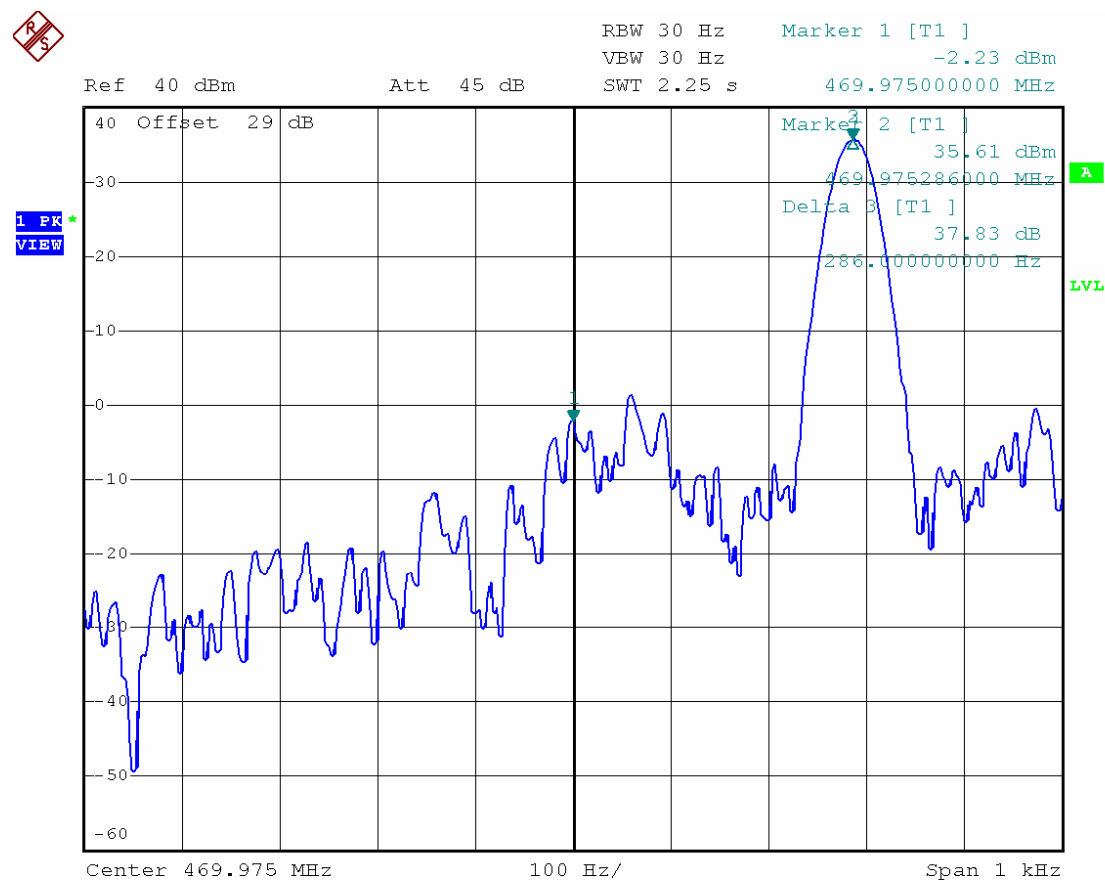

Date: 20.DEC.2007 19:55:39


5.10.9.6 Plot 4 (0°C)

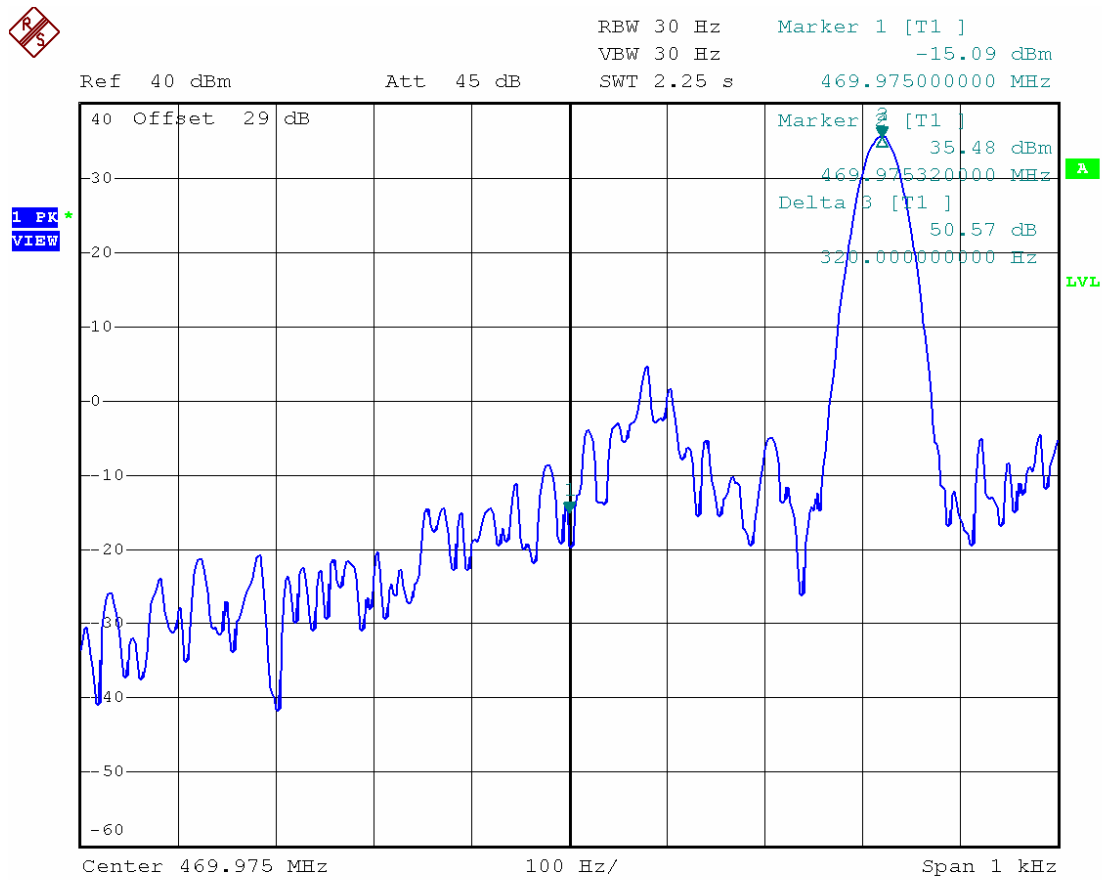

SL7402 / MaxonCIC

Date: 20.DEC.2007 20:33:51


5.10.9.7 Plot 5 (+10°C)

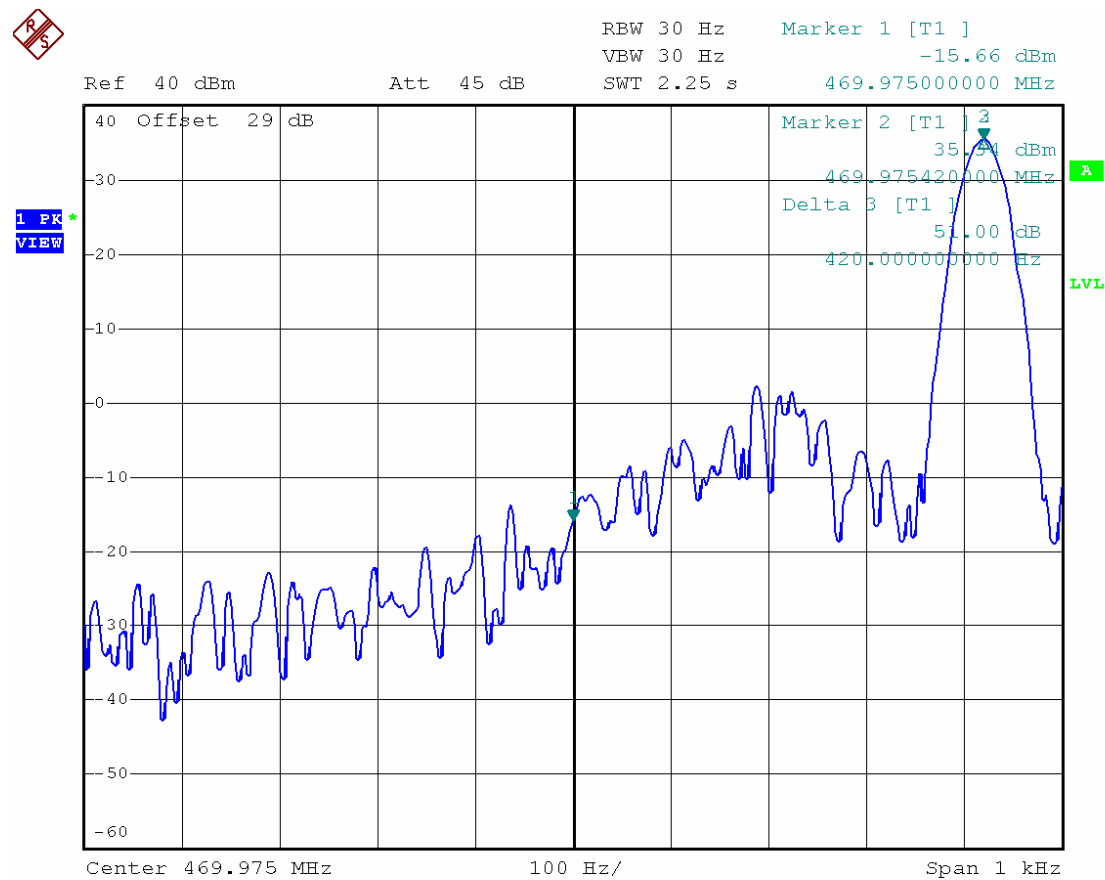

SL7402 / MaxonCIC


Date: 20.DEC.2007 21:20:39

5.10.8.8 Plot 6 (+20°C)

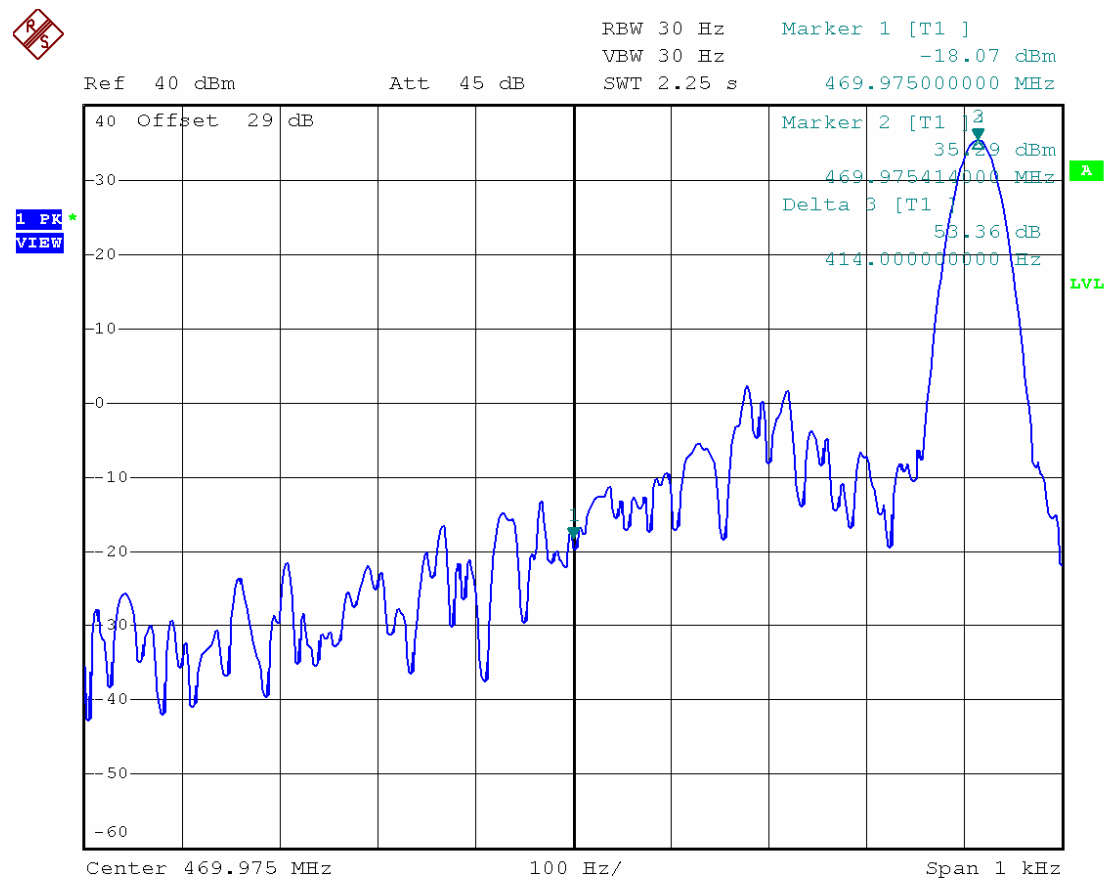


SL7402 / MaxonCIC

Date: 20.DEC.2007 21:34:30

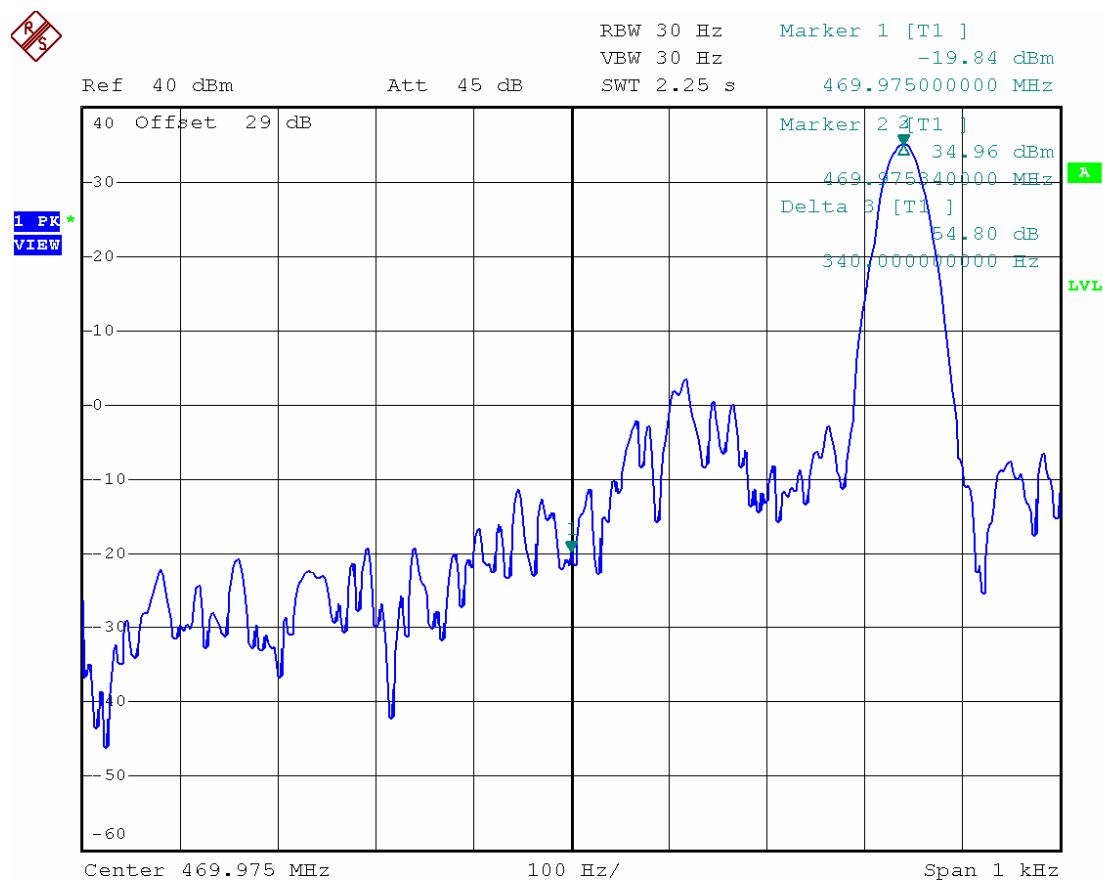

Date: 20.DEC.2007 22:09:14


5.10.9.11 Plot 9 (+50°C)

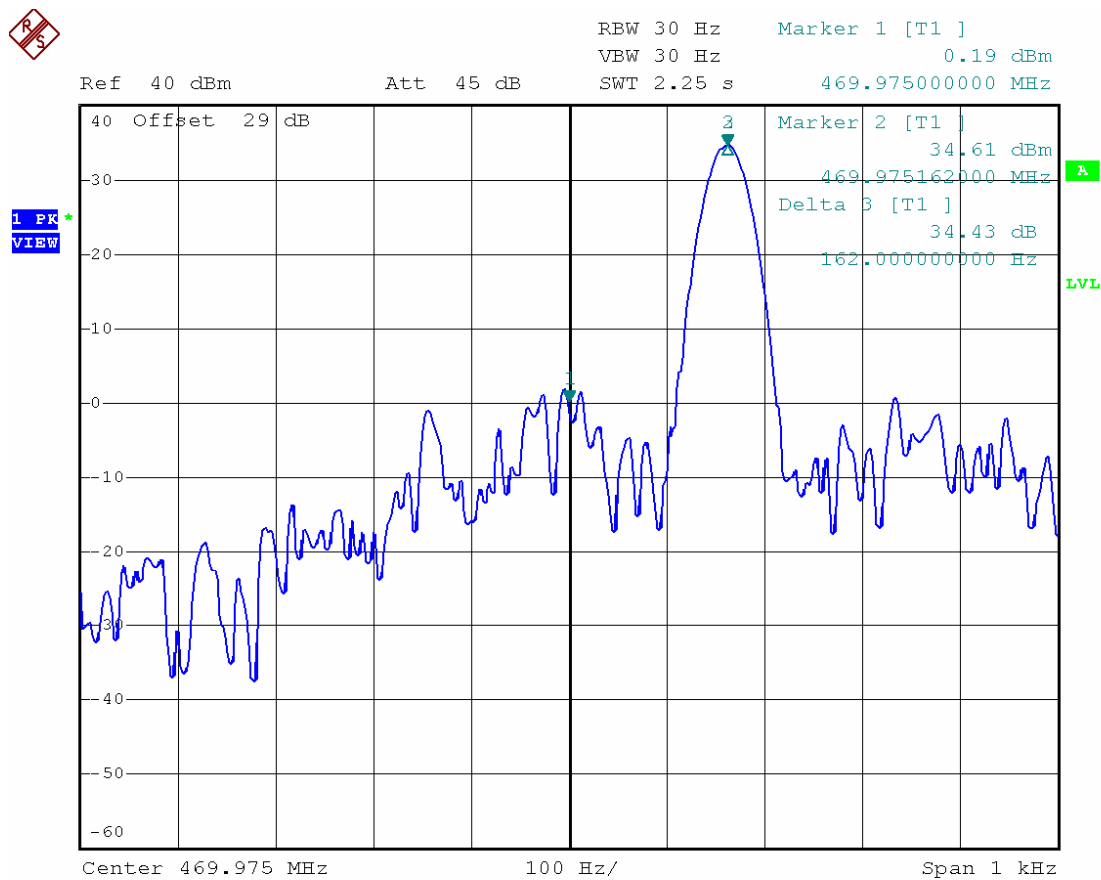

SL7402 / MaxonCIC

Date: 20.DEC.2007 23:11:32


5.10.9.12 Plot 10 (+60°C)

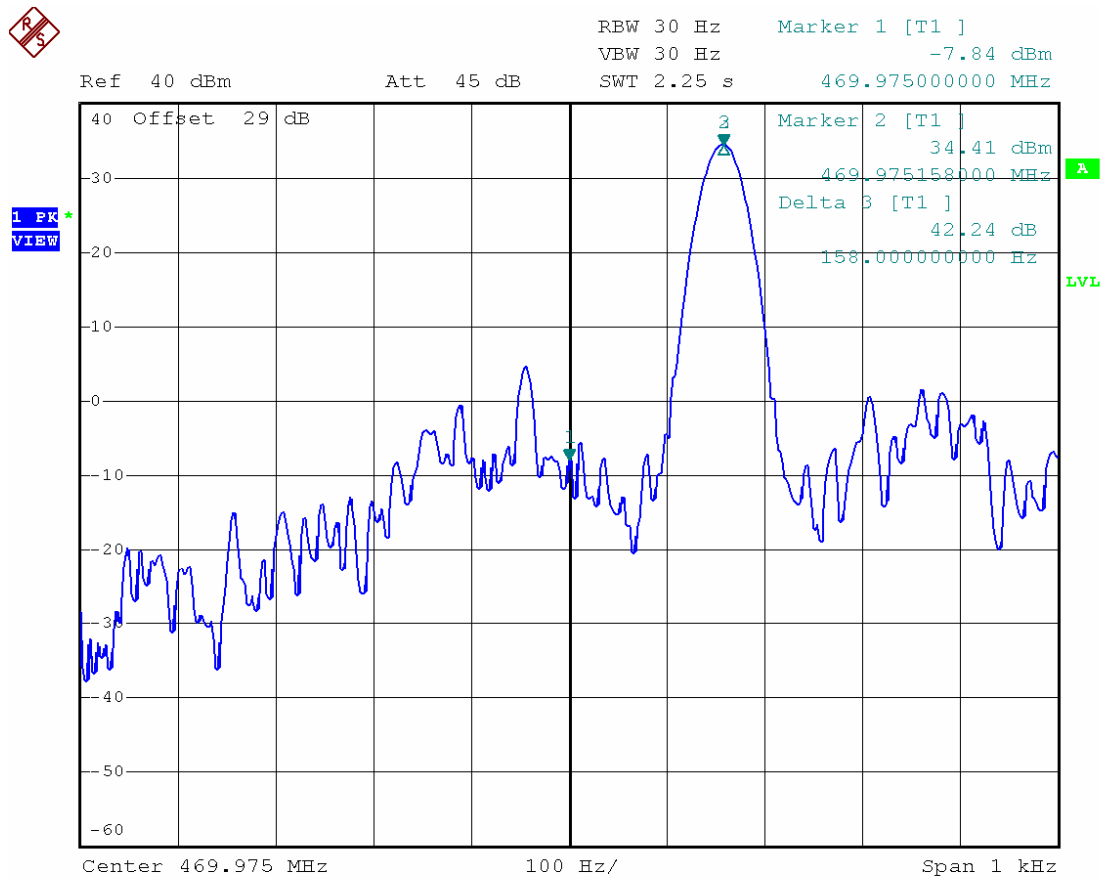

SL7402 / MaxonCIC

Date: 20.DEC.2007 23:26:39


5.10.9.13 Plot 11 (20°C, 6.29V)

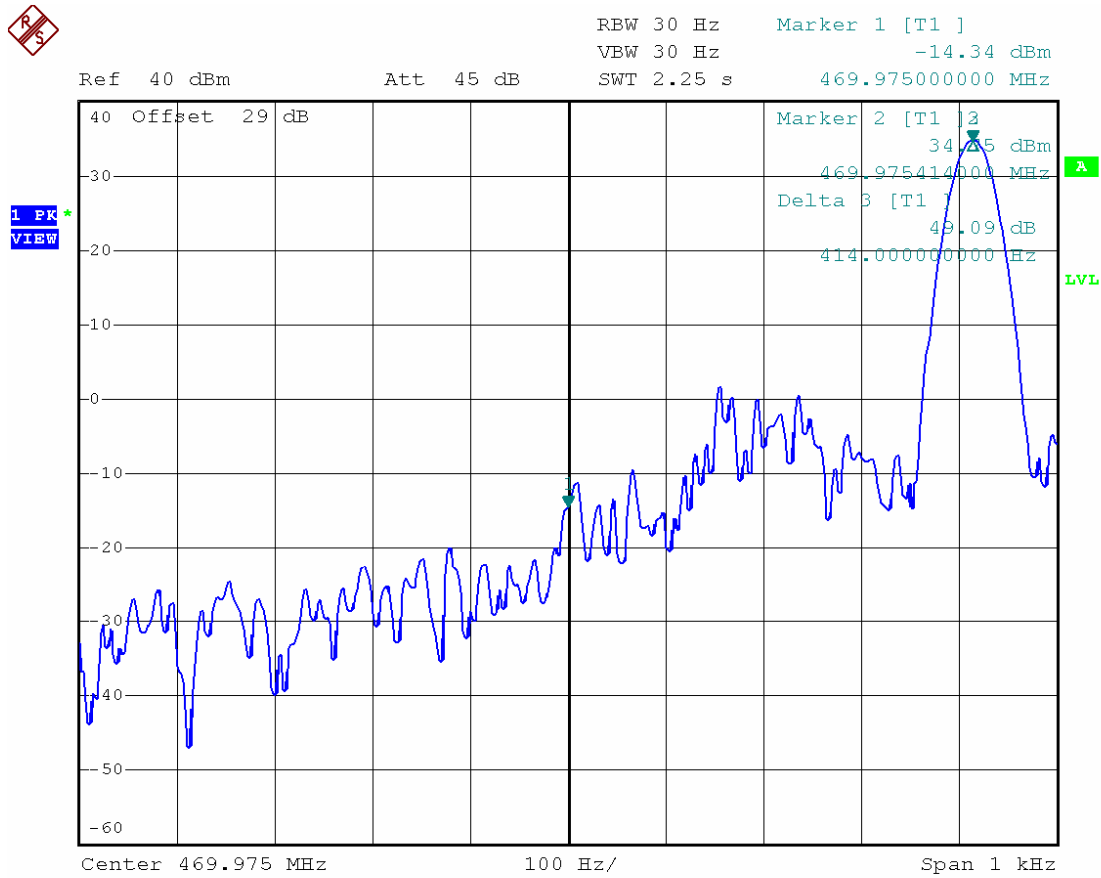

SL7402 / MaxonCIC

Date: 20.DEC.2007 21:35:03

5.10.9.14 Plot 12 (20°C, 8.51V)

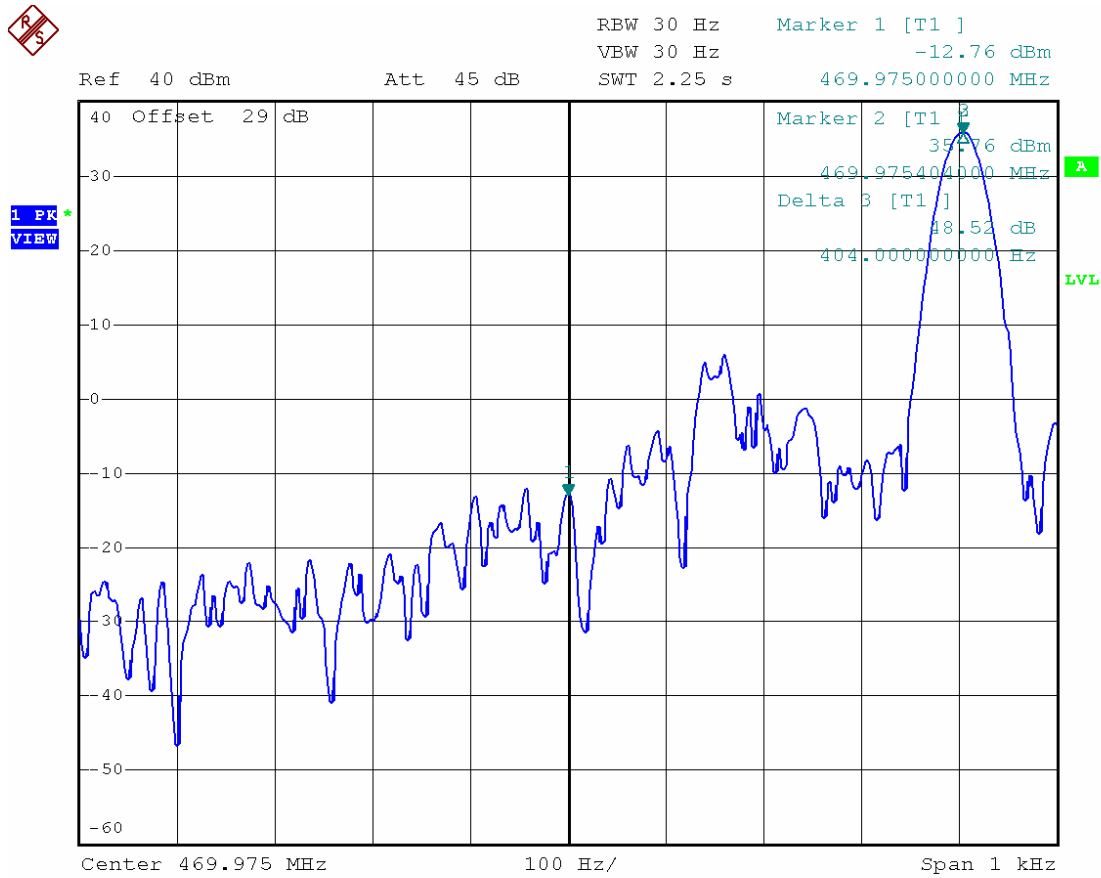

SL7402 / MaxonCIC

Date: 20.DEC.2007 21:35:27

5.11 Transient Frequency Behavior

5.11.1 Specification

FCC Rules Part 90, Section 90.214
Industry Canada, RSS-119 Section 7.0

5.11.2 Method of Measurement

ANSI/TIA-603-B-2002 Section 2.2.19

5.11.3 Measurement Set-Up

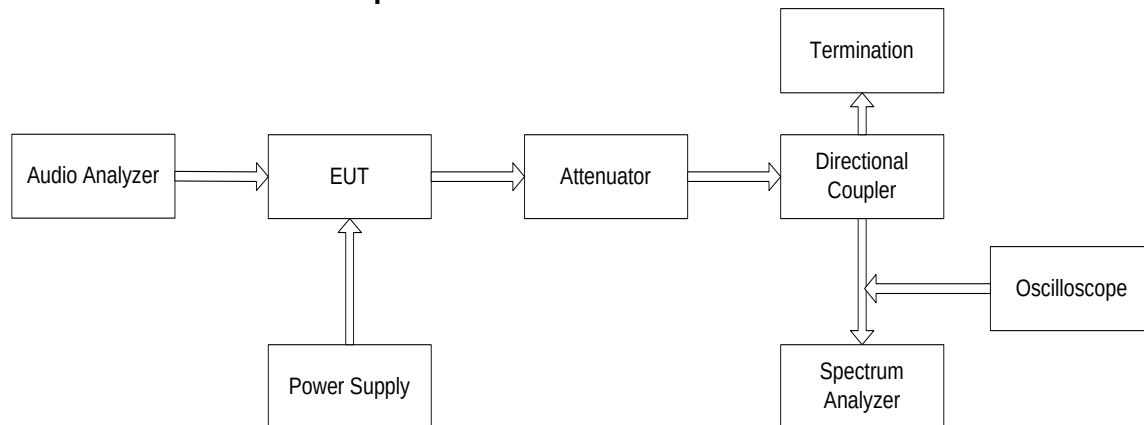


Fig.9

5.11.4 Test Equipment List

Equipment	Model Name	Manufacturer
EUT	SL7402	Maxon CIC Corp.
Power Supply	IPS-30B03DD	INTERACT
Audio Analyzer	8903B	Agilent
Attenuator	33-30-33	WEINSCHEL
Directional Coupler	778D	Agilent
Termination	8173	Bird
Oscilloscope	TDS3032	Tektronix
Spectrum Analyzer	FSP7	Rohde & Shwarz

5.11.5 Test Procedure

- The unit was turn-up in accordance with the alignment procedure stated in the FIG. 9, and was loaded into a 50 ohm resistive termination.
- Using the variable attenuator the transmitter level was set to 40 dB below the test receivers maximum input level, then the transmitter was turned off.
- With the transmitter off the signal generator was set 20dB below the level of the transmitter in the above step, this level will be maintained with the signal generator through-out the test.
- Reduce the attenuation between the transmitter and the RF detector by 30 dB.
- With the levels set as above the transient frequency behavior was observed & recorded.
- Requirements

5.11.6 Limit

Transient Frequency Difference Limits

Time Interval	Max. Permitted Frequency Difference for 25 and 30 kHz Channel Spacing (in kHz)	Max. Permitted Frequency Difference for 12.5 and 15 kHz Channel Spacing (in kHz)
t1 or t3	25	12.5
t2	12.5	6.25

Transient Duration Limits

Time Intervals	Frequency Ranges (MHz)		
	30 to 174	406 to 512	806 to 940
t1	5.0 ms	10.0 ms	20.0 ms
t2	20.0 ms	25.0 ms	50.0 ms
t3	5.0 ms	10.0 ms	10.0 ms

The transient frequency behaviour of the transmitter is the variation in time of the transmitter frequency difference from the nominal frequency of the transmitter when the RF output power is switched on and off.

ton: according to the method of measurement described the switch-on instant t_{on} of a transmitter is defined by the condition when the output power, measured at the antenna terminal, exceeds 0,1 % of the nominal power.

t1: period of time starting at t_{on} and finishing.

t2: period of time starting at the end of t1 and finishing.


toff: switch-off instant defined by the condition when the nominal power falls below 0,1 % of the nominal power.

t3: period of time that finishing at t_{off} and starting.


5.11.7 Test Plot 1

FCC Rules :	Part 90 §90.231
IC Rules :	RSS-119 Section 7.0
Operating Frequency :	400.025 MHz
Channel :	1st Channel
Power Output :	4 Watts
Channel Spacing :	Narrow Band
Reference Voltage :	7.4 VDC

5.11.7.1 Switch on condition t_{on} , t_1 and t_2

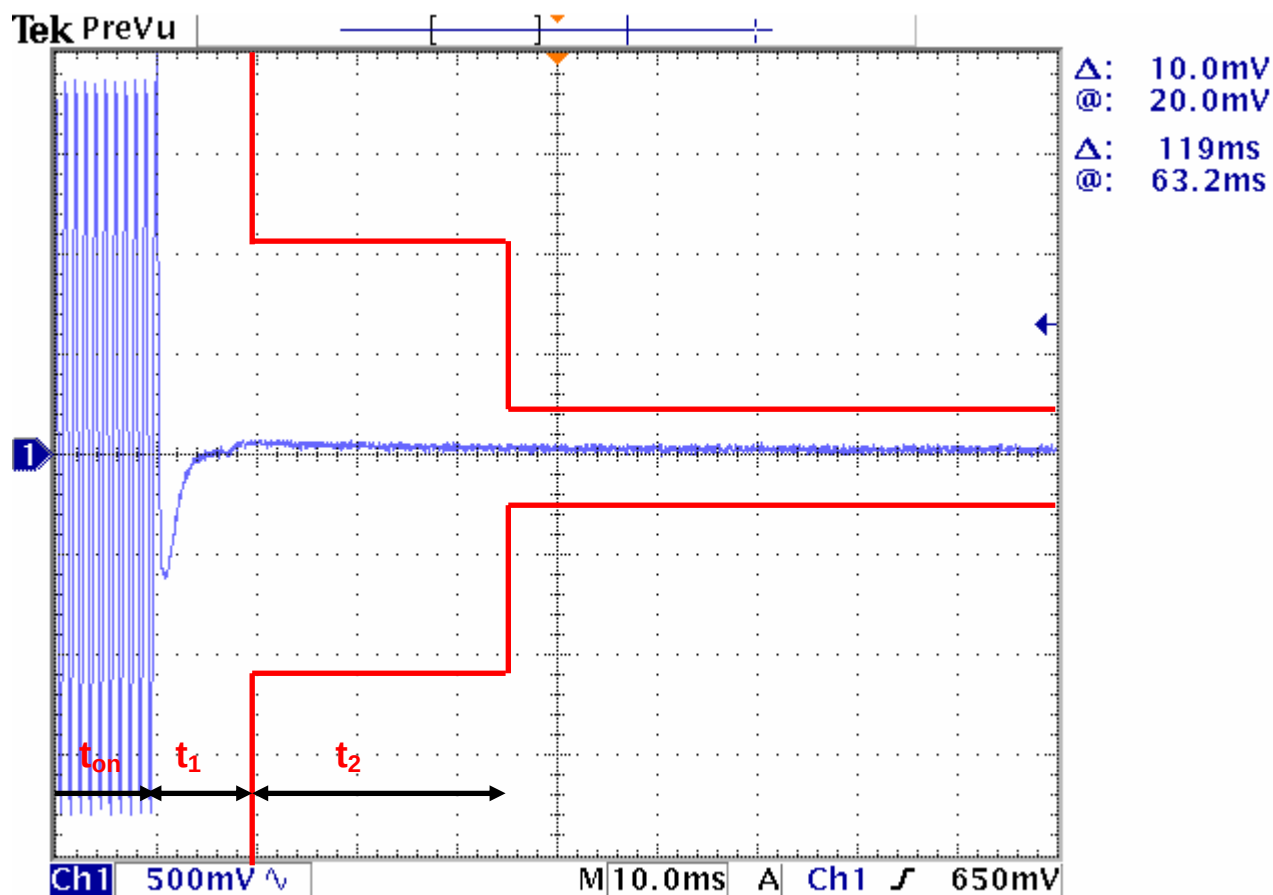


5.11.7.2 Switch off condition t_3, t_{off}

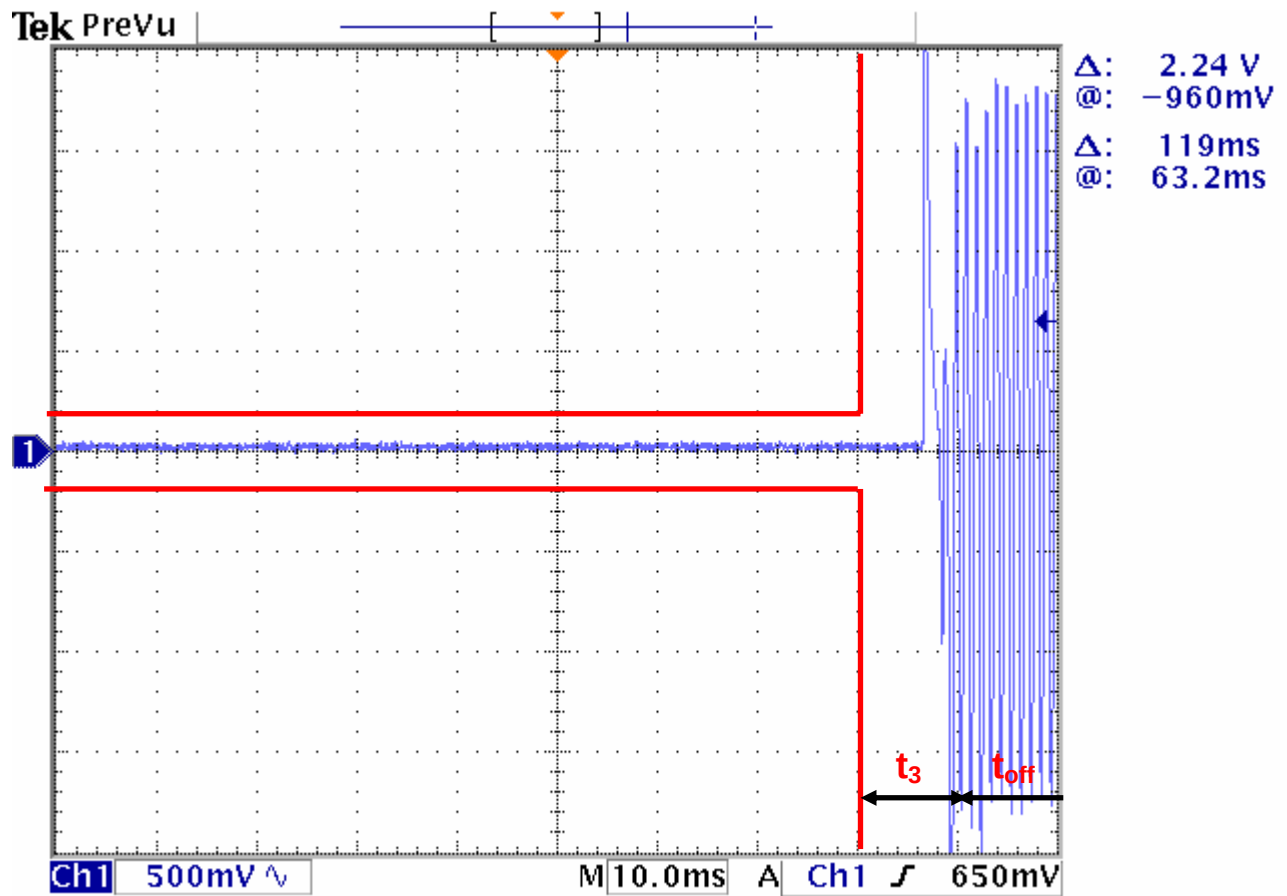


5.11.8 Test Plot 2

FCC Rules :	Part 90 §90.231
IC Rules :	RSS-119 Section 7.0
Operating Frequency :	423.025 MHz
Channel :	2nd Channel
Power Output :	4 Watts
Channel Spacing :	Narrow Band
Reference Voltage :	7.4 VDC

5.11.8.1 Switch on condition t_{on} , t_1 and t_2

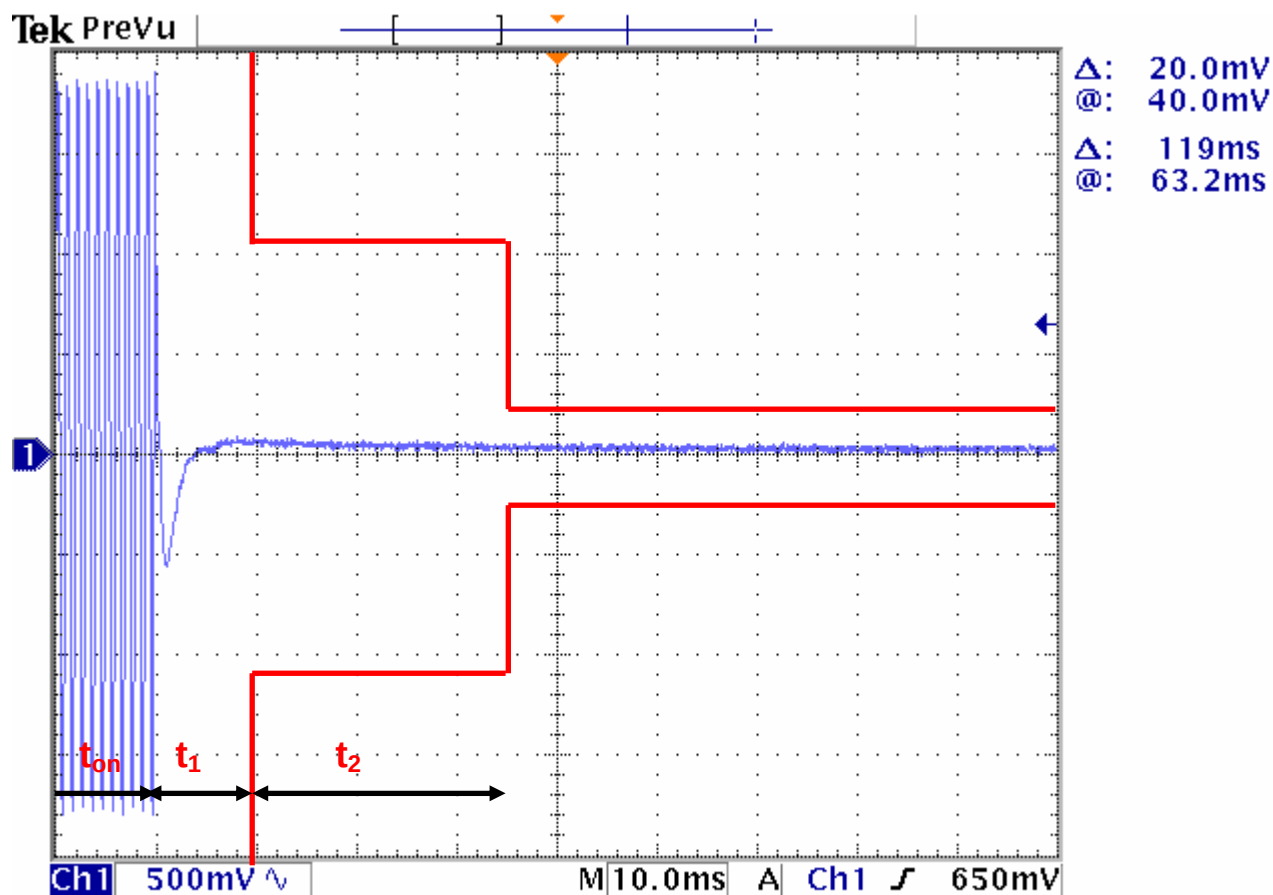


5.11.8.2 Switch off condition t_3, t_{off}

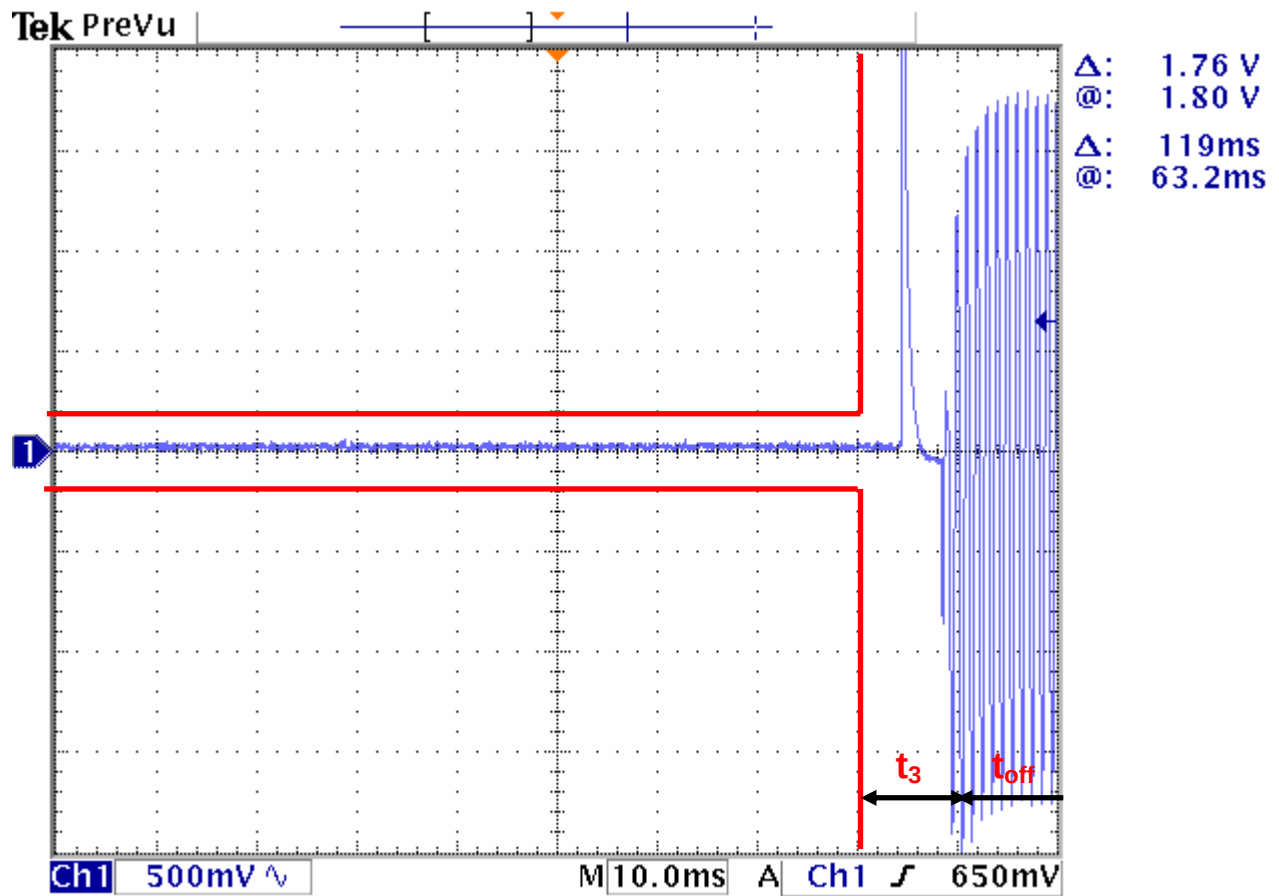


5.11.9 Test Plot 3

FCC Rules :	Part 90 §90.231
IC Rules :	RSS-119 Section 7.0
Operating Frequency :	446.025 MHz
Channel :	3rd Channel
Power Output :	4 Watts
Channel Spacing :	Narrow Band
Reference Voltage :	7.4 VDC

5.9.9.1 Switch on condition t_{on} , t_1 and t_2

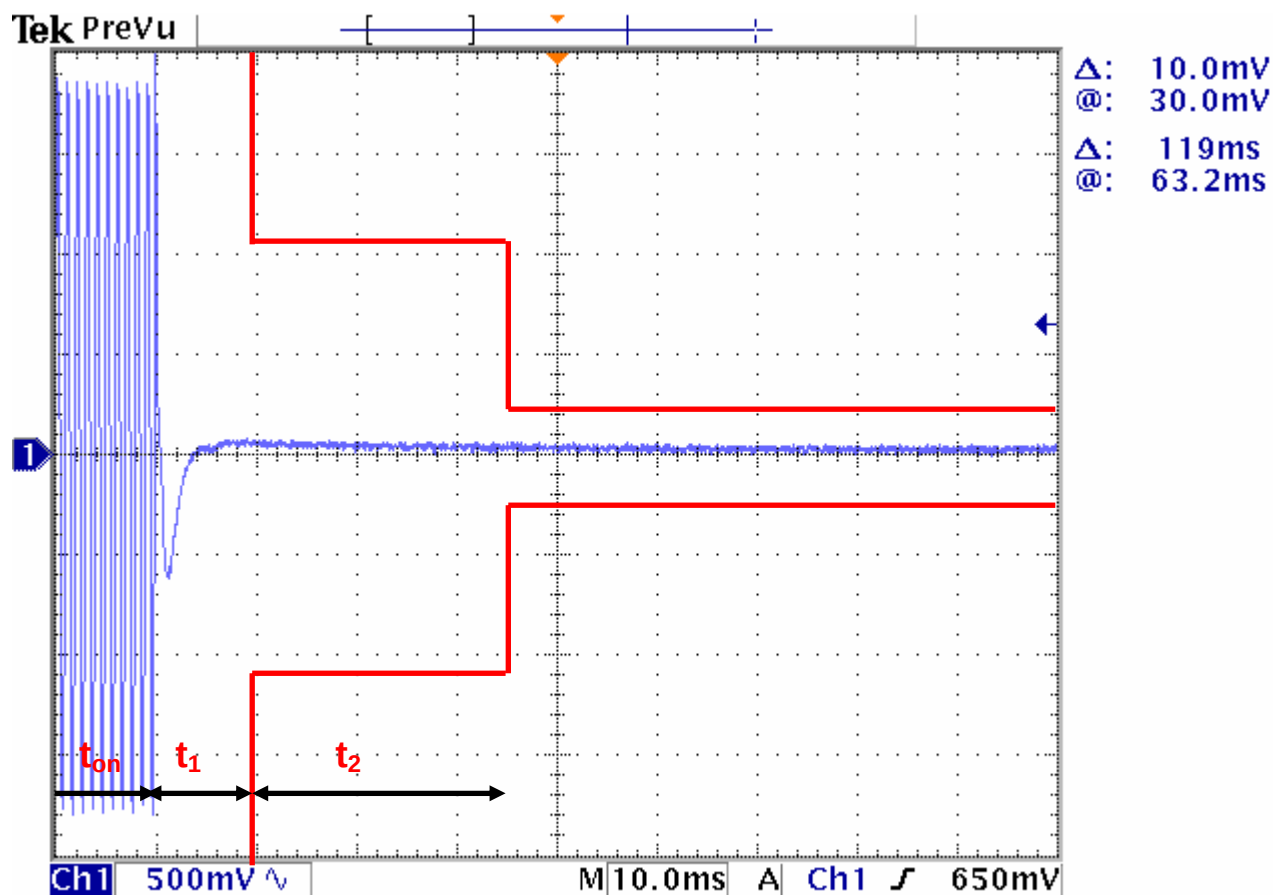


5.11.9.2 Switch off condition t_3, t_{off}

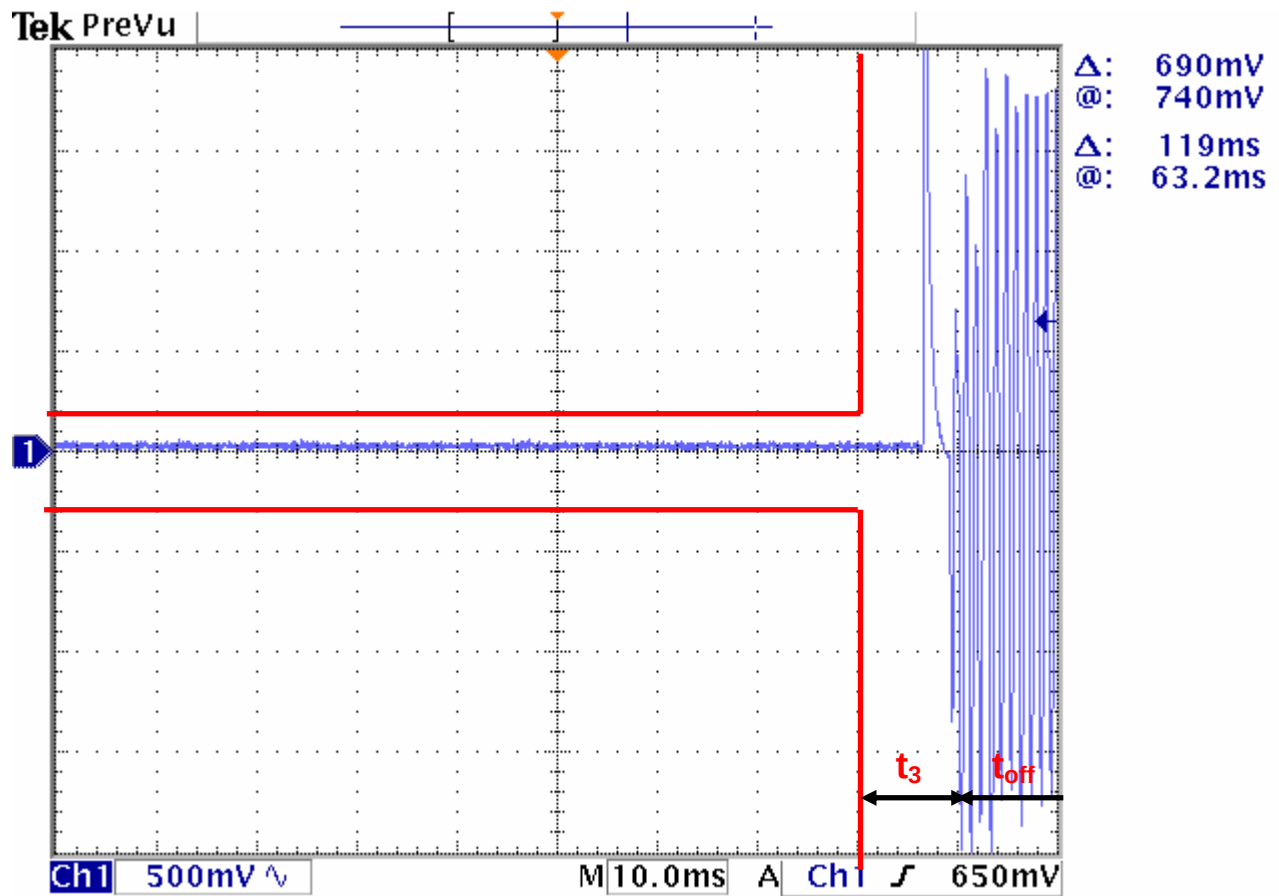


5.11.10 Test Plot 4

FCC Rules :	Part 90 §90.231
IC Rules :	RSS-119 Section 7.0
Operating Frequency :	469.975 MHz
Channel :	4th Channel
Power Output :	4 Watts
Channel Spacing :	Narrow Band
Reference Voltage :	7.4 VDC

5.11.10.1 Switch on condition t_{on} , t_1 and t_2

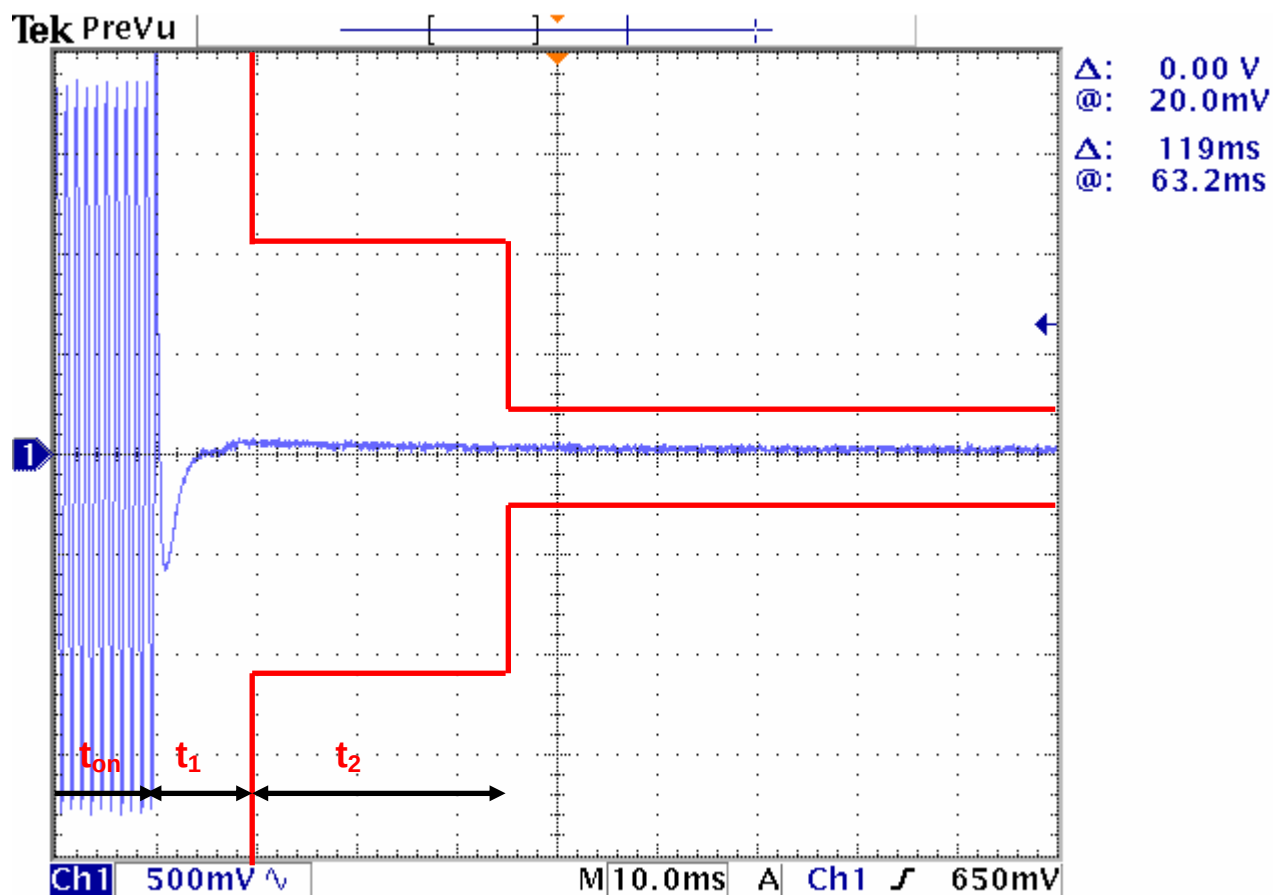


5.11.10.2 Switch off condition t_3, t_{off}

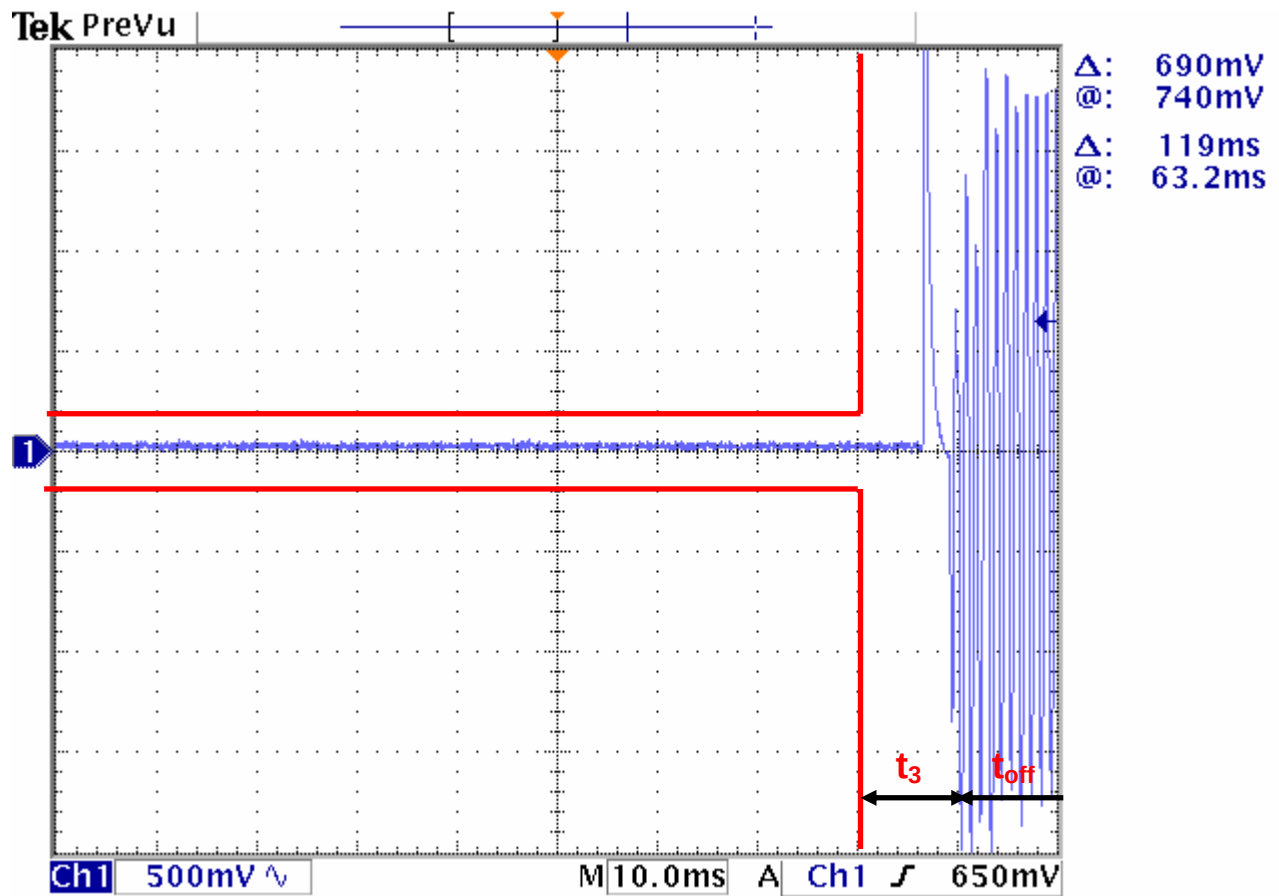

5.11.11 Test Plot 5


FCC Rules :	Part 90 §90.231
IC Rules :	RSS-119 Section 7.0
Operating Frequency :	400.025 MHz
Channel :	1st Channel
Power Output :	4 Watts
Channel Spacing :	WideBand
Reference Voltage :	7.4 VDC

5.11.11.1 Switch on condition t_{on} , t_1 and t_2

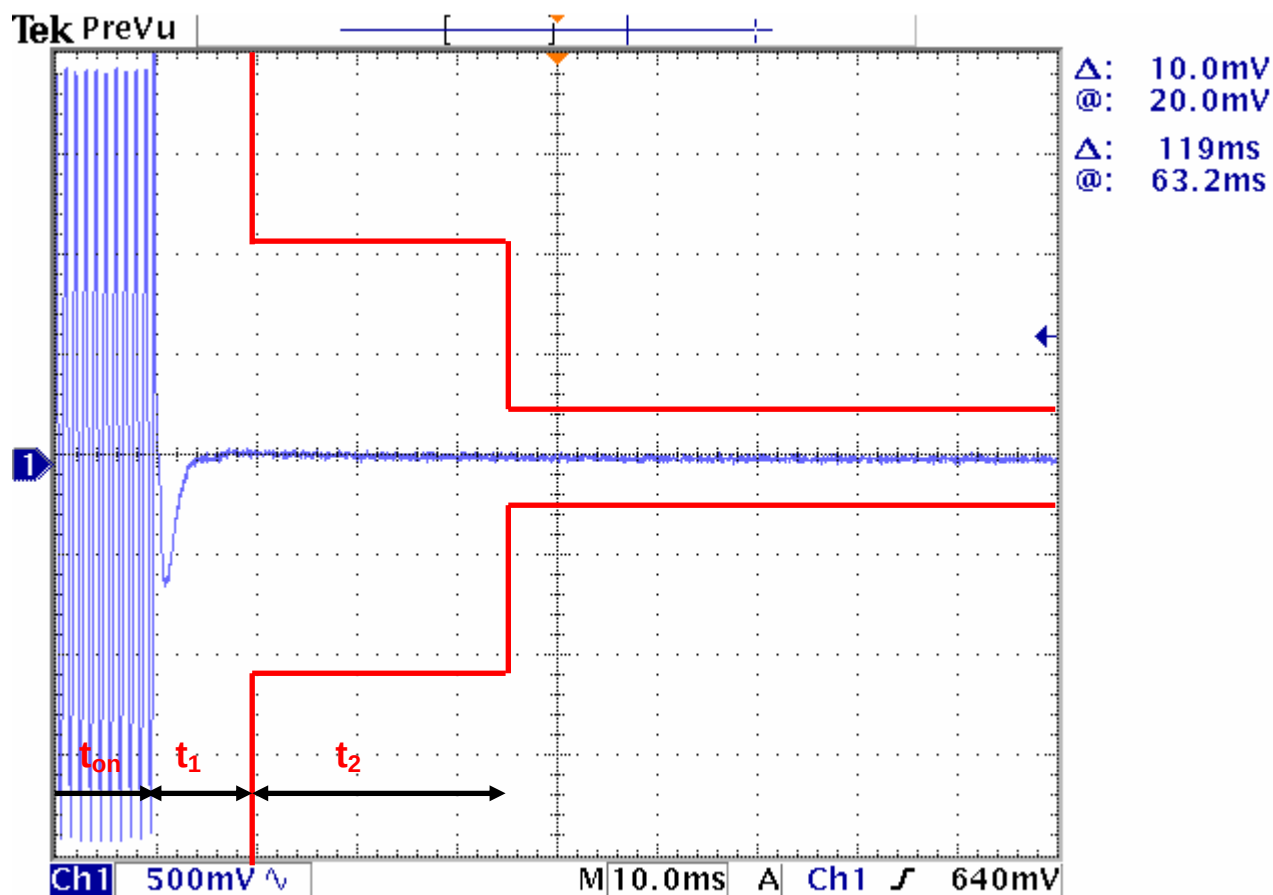

5.11.11.2


Switch off condition t_3, t_{off}

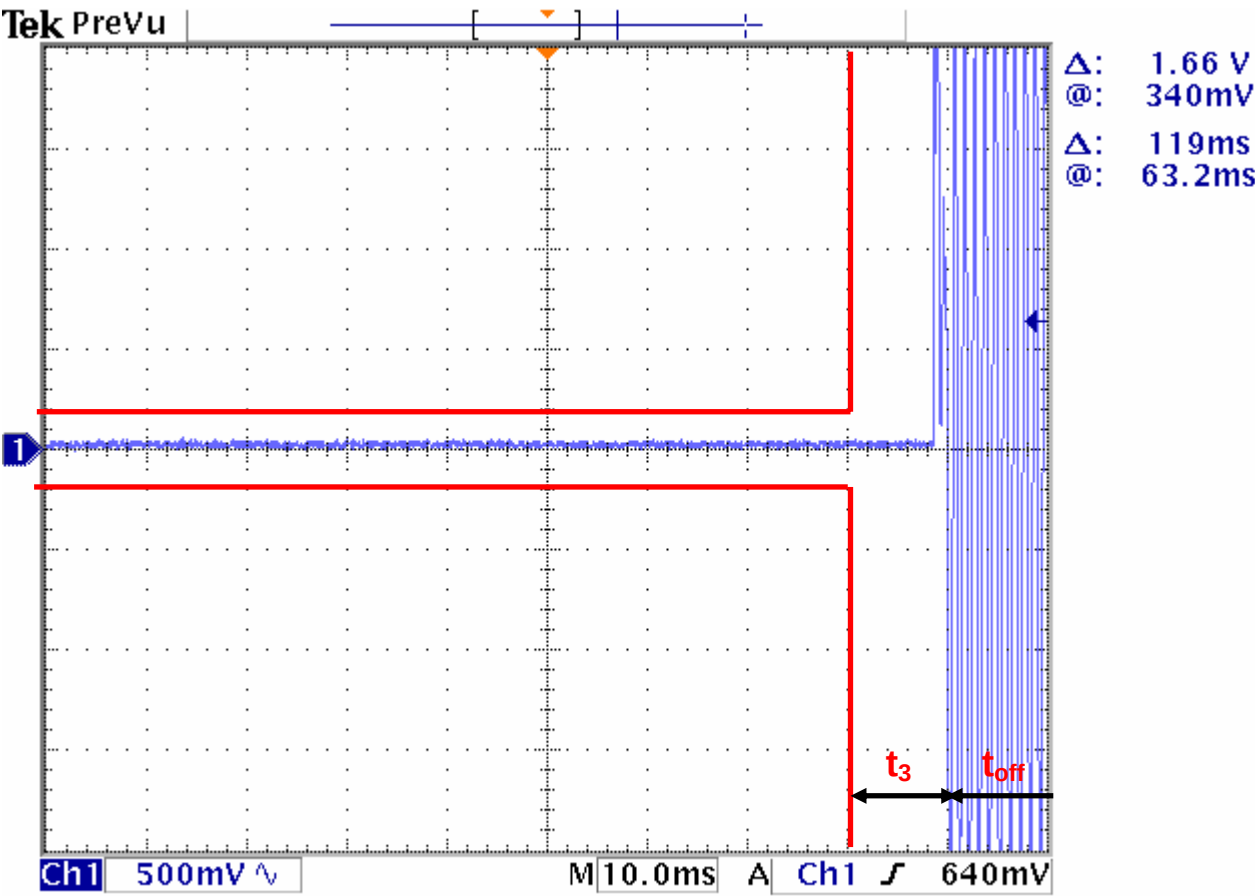

5.11.12 Test Plot 6


FCC Rules :	Part 90 §90.231
IC Rules :	RSS-119 Section 7.0
Operating Frequency :	423.025 MHz
Channel :	2nd Channel
Power Output :	4 Watts
Channel Spacing :	WideBand
Reference Voltage :	7.4 VDC

5.11.12.1 Switch on condition t_{on} , t_1 and t_2

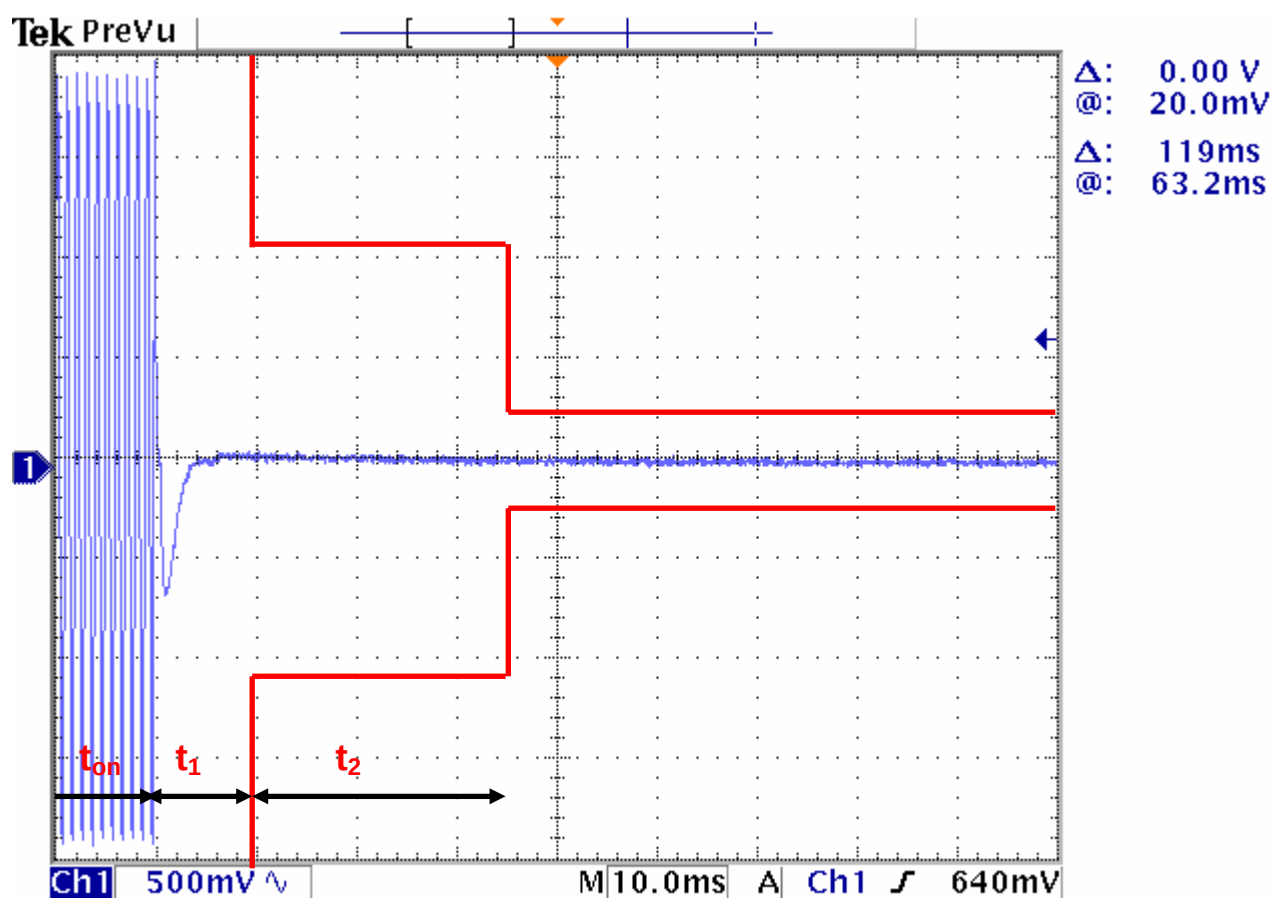

5.11.12.2


Switch off condition t_3, t_{off}

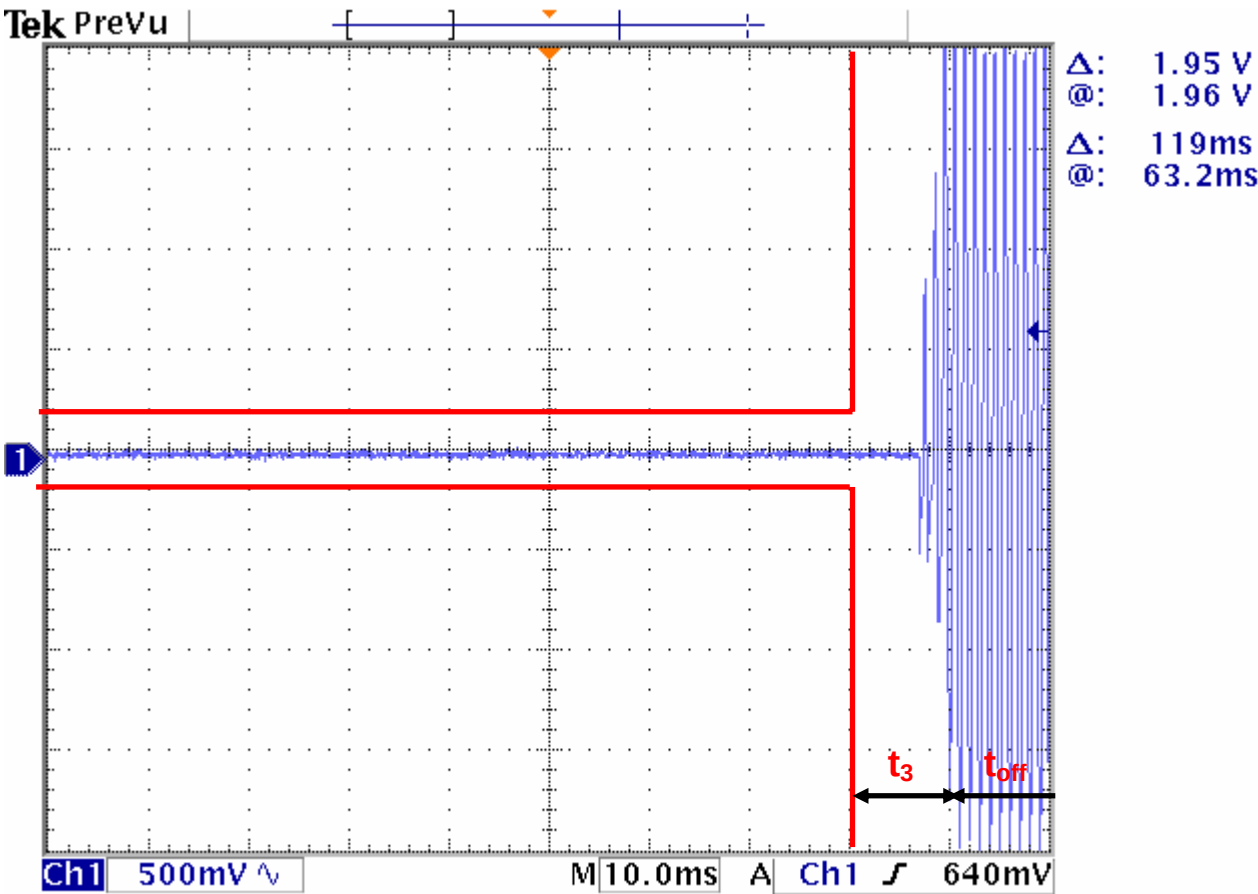

5.11.13 Test Plot 7


FCC Rules :	Part 90 §90.231
IC Rules :	RSS-119 Section 7.0
Operating Frequency :	446.025 MHz
Channel :	3rd Channel
Power Output :	4 Watts
Channel Spacing :	WideBand
Reference Voltage :	7.4 VDC

5.11.13.1 Switch on condition t_{on} , t_1 and t_2

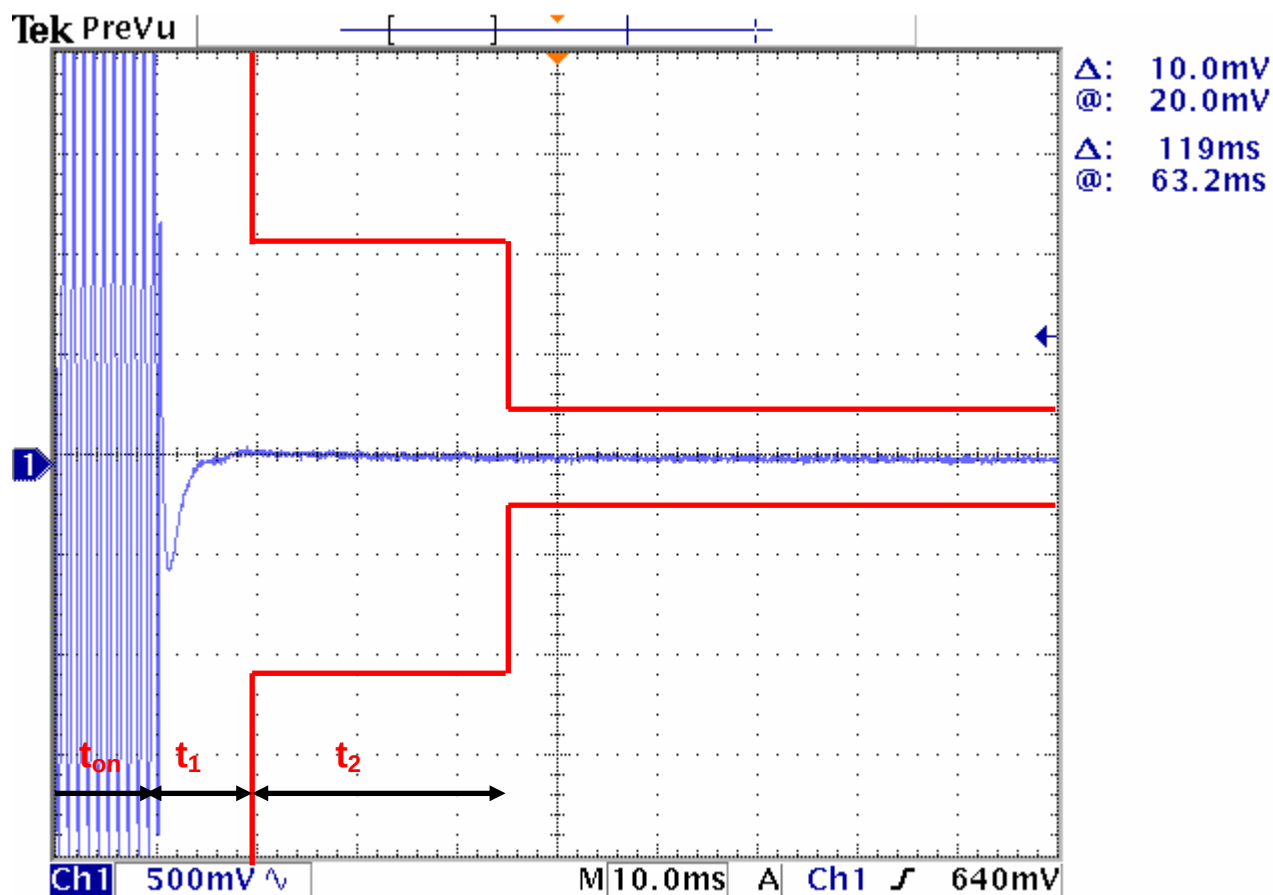

5.11.13.2


Switch off condition t_3 , t_{off}

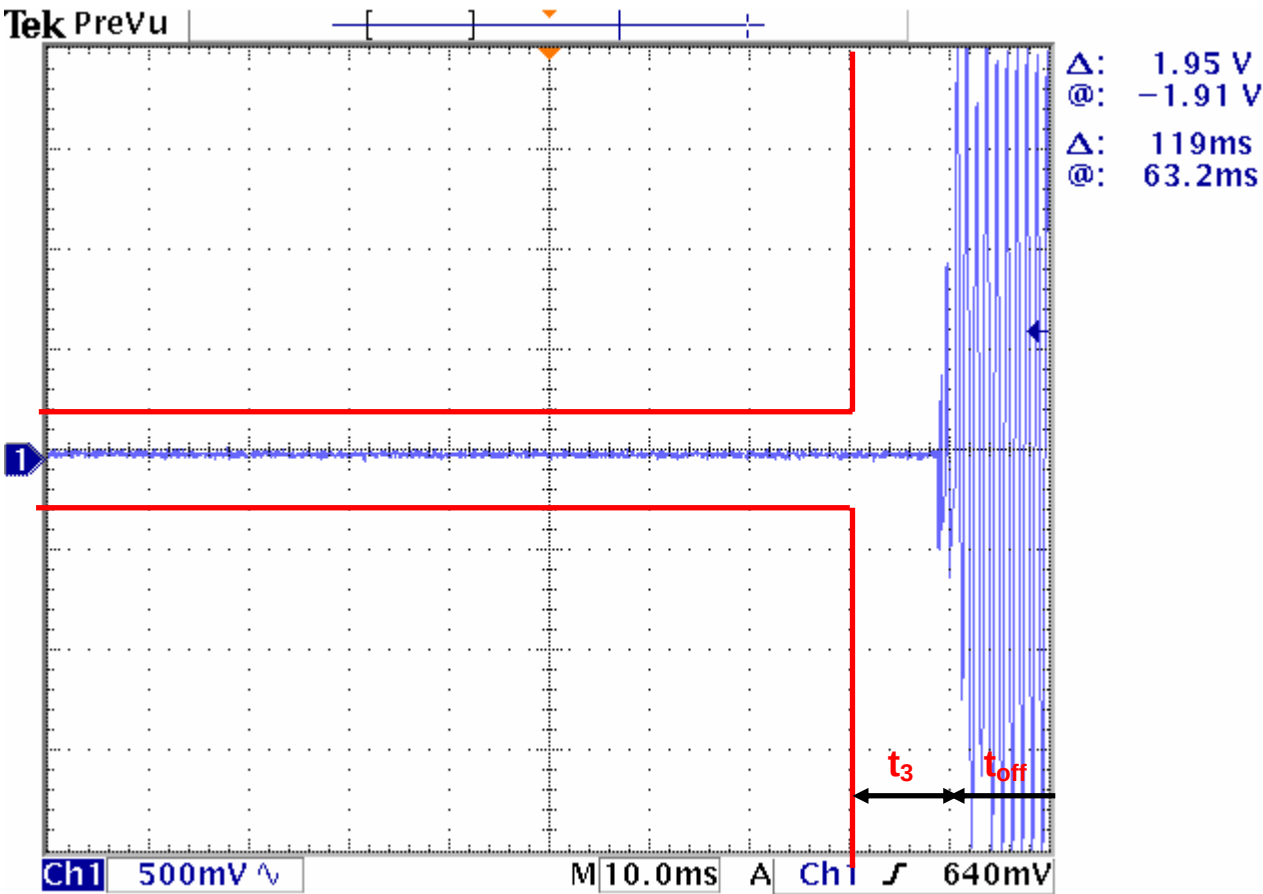


5.11.14 Test Plot 8

FCC Rules :	Part 90 §90.231
IC Rules :	RSS-119 Section 7.0
Operating Frequency :	469.975 MHz
Channel :	4th Channel
Power Output :	4 Watts
Channel Spacing :	WideBand
Reference Voltage :	7.4 VDC

5.11.14.1 Switch on condition t_{on} , t_1 and t_2

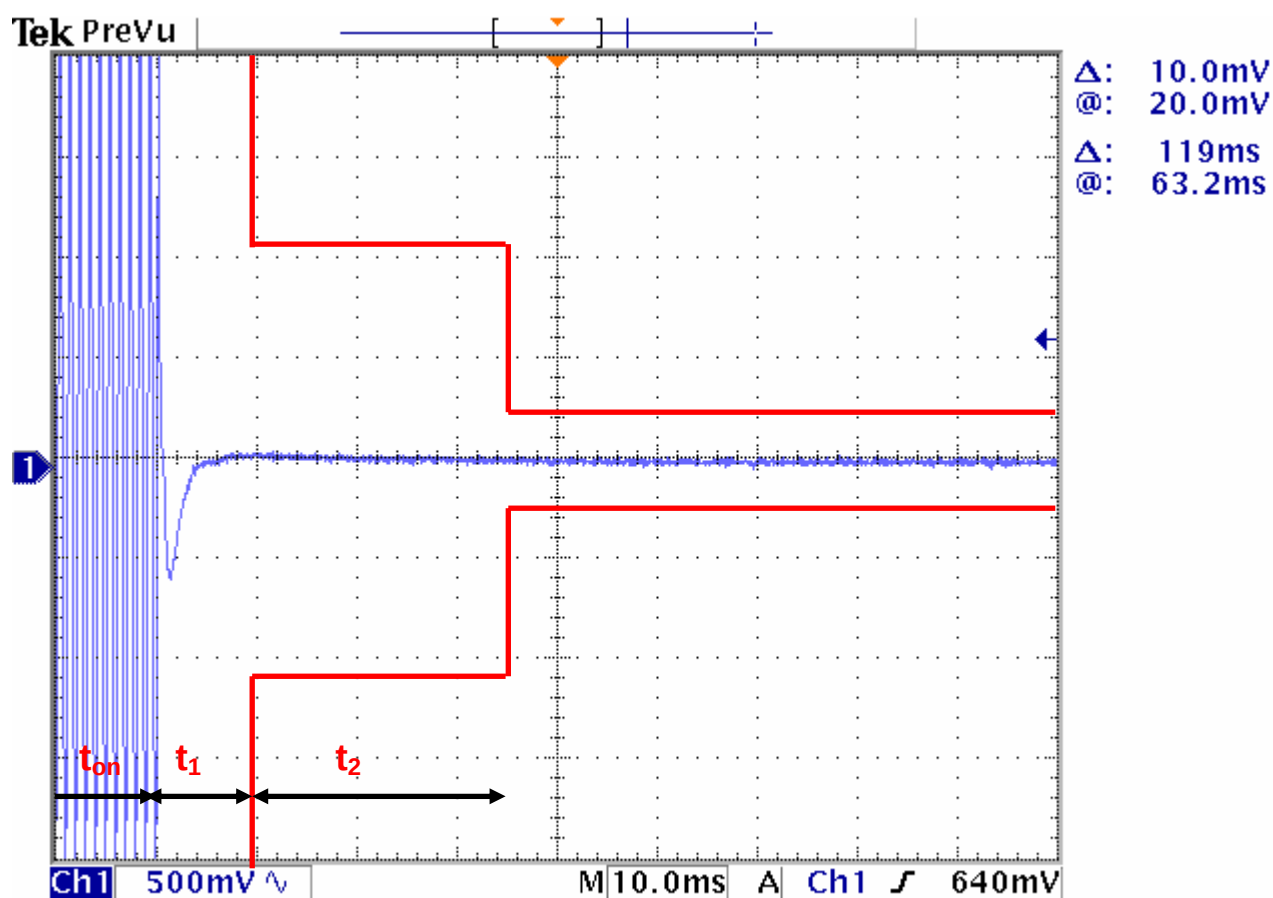

5.11.14.2 Switch off condition t_3 , t_{off}

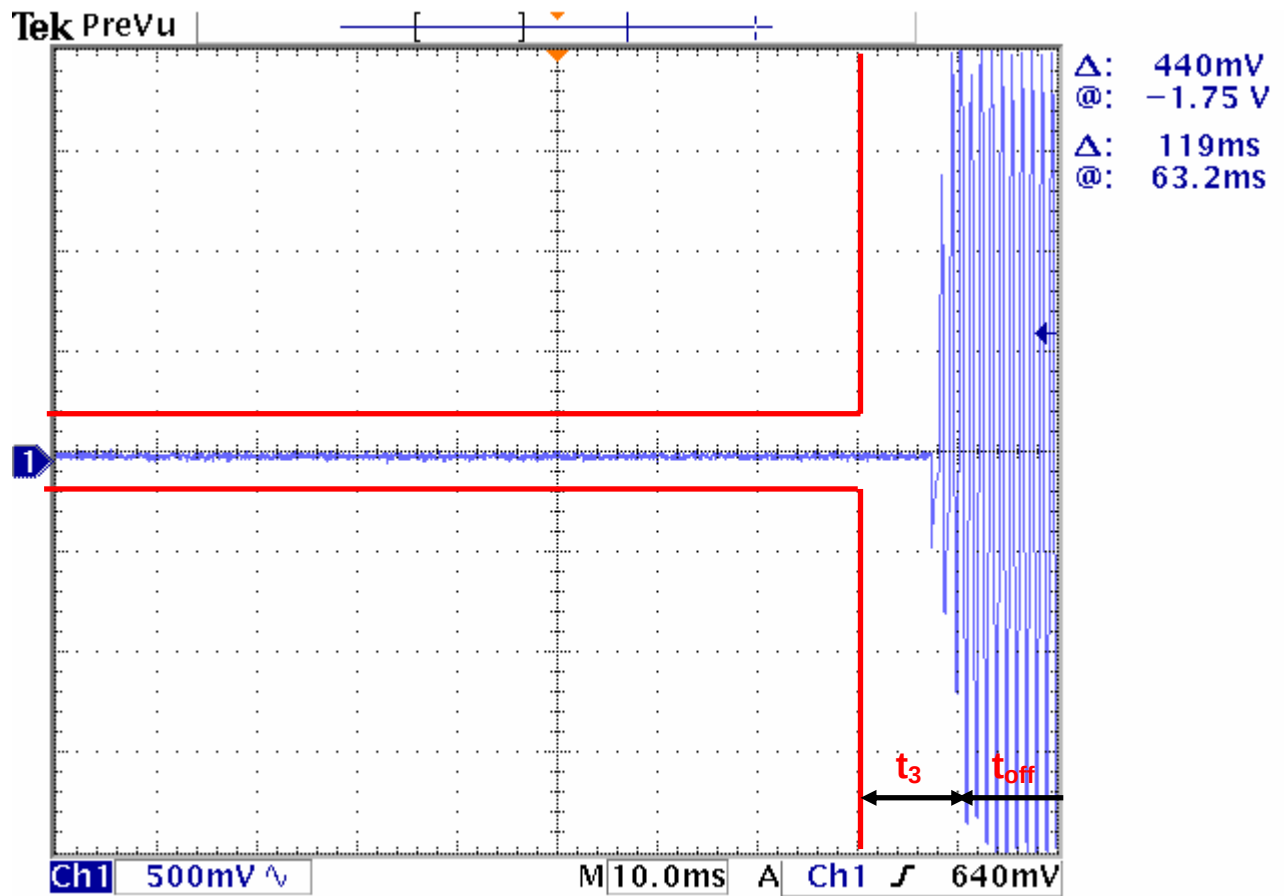

6. TEST EQUIPMENTS LIST

	EQUIPMENT	MODEL	MANUFACTURE	SERIAL NUMBER	Calibration Due date
1	Receiver	ESVS30	Rohde & Schwarz	832854/010	06/22/08
2	Spectrum analyzer	FSP7	Rohde & Schwarz	100001	02/22/08
3	Signal Generator	E4432B	Agilent	US40053157	07/15/08
4	Signal Generator	E4438C	Agilent	MY45091894	06/22/08
5	Signal Generator	GT9000	Gigatronix	9604010	02/22/08
6	Modulation Analyzer	8901B	Agilent	3028A03124	02/22/08
7	Audio Analyzer	8903B	Agilent	3011A09344	02/22/08
8	Digital Oscilloscope	TDS3032	Tektronix	B019436	11/20/08
9	Frequency Counter	R5372	Advantest	41855204	02/22/08
10	Shield Room (7m x 4m x 3m)	N/A	SJEMC	0004	N/A
11	Turn Table	OSC-30	N/A	BWS-01	N/A
12	Antenna Mast	JAC-3	Dail EMC	N/A	N/A
13	Temperature & Humidity chanber	EN-GLMP-54	Enex	N/A	03/23/08
14	Bilog Antenna	VULB9160	Schwarzbeck	VULB9160-3122	12/29/08
15	Bilog Antenna	VULB9161	Schwarzbeck	VULB9161-4067	12/23/08
16	Bilog Antenna	VULB9161	Schwarzbeck	VULB9161-4068	12/23/08
17	Horn Antenna	3115	ETS-Lindgren	00055005	02/07/08
18	Horn Antenna	BBHA 9120 D	Schwarzbeck	BBHA 9120 D 234	02/07/08
19	Horn Antenna	BBHA 9170	Schwarzbeck	BBHA9170157	02/07/08
20	Power Meter	E4418A	Agilent	GB38272621	11/14/08
21	Power Sensor	E9301B	Agilent	US40010238	11/14/08
22	Power supply	IPS-30B03DD	Interact	42052	02/22/08
23	Directional Coupler	778D	Agilent	1144A08477	11/14/08
24	Power Divider/Combiner	11636A	Agilent	05774	11/14/08
25	Power Divider/Combiner	11636A	Agilent	05870	11/14/08