

FCC / INDUSTRY CANADA MEASUREMENT REPORT

CERTIFICATION OF COMPLIANCE FCC PART90 & INDUSTRY CANADA RSS-119 CERTIFICATION

PRODUCT : Two Way Radio
Land Mobile Service (LMR)

MODEL/TYPE NO : SP1102

FCC ID : RXUSP1102

TRADE NAME : 
Maxon CIC Corp.

APPLICANT : Chongho Building, #7-61 Yangjae-Dong, Seocho-Gu, Seoul, 137-130, Korea
Attn. : Hyun Koo Kang / Senior Manager

CLASSIFICATION : TNF Licensed Non-Broadcast Station Transmitter Held to Face

RULE PART(S) : FCC Part 90 Private land mobile radio services
RSS-119 Land Mobile and Fixed Radio Transmitters and Receivers, Issue 9 27.4 MHz to 960 MHz

FCC PROCEDURE : Certification

DATES OF TEST : October 2, 2008 to November 6, 2008

DATES OF ISSUE : November 7, 2008

TEST REPORT No. : BWS-08-RF-0015

TEST LAB. : BWS TECH Inc.(FCC Registration Number : 553281)

This Two Way Radio SP1102 has been tested in accordance with the measurement procedures specified in ANSI C63.4-2003 and ANSI/TIA-603-B-2002 at the BWS TECH/EMC Test Laboratory and has been shown to be complied with the electromagnetic radiated emission limits specified in FCC Rule Part 90 and Industry Canada RSS-119.

I attest to the accuracy of data. All measurement herein was performed by me or were made under my supervision. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. The results of testing in this report apply to the product/system, which was tested only. Other similar equipment may not necessarily produce the same results due to production tolerance and measurement uncertainties.

November 7, 2008
(Date)



Tested by Hyunsup, Jin

November 7, 2008
(Date)



Reviewed by TaeHyun, Nam

BWS TECH Inc.

www.bws.co.kr

#611-1 Maesan-Ri, Mohyeon-Myeon, Yongin-Si, Gyeonggi-Do, 449-853 Korea

TEL: +82 31 333 5997 FAX: +82 31 333 0017

TABLE OF CONTENTS

	Pages
1. General Information	3
2. Description of Test Facility	4
3. Product Information	5
4. Summary of Test Results	7
5. Test Data	8
5.1. Power Line Conducted Emission	10
5.2. RF Power Output (Conducted)	12
5.3. Modulation Characteristics – Audio Frequency Response	14
5.4. Modulation Characteristics – Audio Lowpass Filter Response	18
5.5. Modulation Characteristics – Modulation Limiting	20
5.6. Occupied Bandwidth	29
5.7. Spurious Emissions at Antenna Terminals	43
5.8. Field Strength of Spurious Radiation	57
5.9. Frequency Stability/Temperature Variation	59
5.10. Transient Frequency Behavior	99
6. Test Equipment List	113

Appendix 1. Test Setup Photos

Appendix 2. FCC ID Label and location

Appendix 3. External Photos of EUT

Appendix 4. Internal Photos of EUT

Appendix 5. Block Diagram

Appendix 6. Schematics

Appendix 7. Theory of Operation

Appendix 8. Part List / Tune up Procedure

Appendix 9. User Manual

FCC / INDUSTRY CANADA TEST REPORT

Scope – Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)

1. General Information

Applicant

Company Name Maxon CIC Corp.
Company Address Chongho Building, #7-61 Yangjea-Dong, Seocho-Gu, Seoul, 137-130, Korea
Phone/Fax Phone : +82-2-3498-3060 Fax : 02-3498-3115

Manufacturer

Company Name Maxon CIC Thailand Co., Ltd(MCTL)
Company Address 40/23 Moo 5 Rojana Industrial Park Tambol U-Thai, Amphur U-Thai Ayutthaya 13210 Thailand
Phone/Fax Tel No. : +66-(0)35-719-498~501 Fax No. : +66-(0)35-719-492

- **EUT Type** Two Way Radio (LMR)
- **Model Number** SP1102
- **FCC Identifier** RXUSP1102
- **S/N** 0806000001
- **FCC Rule Part(s)** FCC Part 90 Private land mobile radio services
RSS-119 Land Mobile and Fixed Radio Transmitters and Receivers,
27.4 MHz to 960 MHz
- **FCC Classification** TNF : Licensed Non-Broadcast Station Transmitter
- **Freq. Range** 148 MHz ~ 174 MHz
- **Channel** 16 Channels
- **Modulation Method** FM
- **Emission Designator** 11K0F3E, 16K0F3E
- **RF Power Output** 1/5 Watt
- **Test Procedure** ANSI C63.4-2003 and ANSI/TIA-603-B-2002
- **Dates of Tests** October 27, 2008 to November 24, 2008
- **Place of Tests** BWS TECH Inc.(FCC Registration Number : 553281)
#611-1 Maesan-Ri, Mohyeon-Myeon, Yongin-Si, Gyeonggi-Do, 449-853 Korea
TEL: +82 31 333 5997 FAX: +82 31 333 0017
- **Test Report No.** BWS-08-RF-0015

2. Description of Test Facility

The measurement for radiated and conducted emission test were conducted at the open area test site of BWS TECH Inc. facility located at #611-1 Maesan-Ri, Mohyeon-Myeon, Yongin-Si, Gyeonggi-Do, 449-853 Korea. The site is constructed in conformance with the requirements of the ANSI C63.4-2000 and CISPR Publication 16. The BWS TECH measurement facility has been filed to the Commission with the FCC for 3 and 10-meter site configurations. Detailed description of test facility was found to be in compliance with the requirements of Section 2.948 FCC Rules according to the ANSI C63.4-2000 and registered to the Federal Communications Commission (Registration Number : 553281).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C.63.4-2000) was used in determining radiated and conducted emissions from the Maxon CIC Corp. Two Way Radio Model : SP1102.

3. Product Information

The Equipment Under Test (EUT) is the MAXON CIC CO LTD Two Way Radio model: SP1102(FCC ID: RXUSP1102).

SP1102 is FM transceiver operating between 148 ~ 174 MHz with an output power of 5 W (1 W at low power).

The SP1102 offers many advanced features found in more expensive Land Mobile Radios.

SP1102 is 16 channel portable FM transceiver constructed with a microprocessor controlled, temperature compensated Phase Locked Loop (PLL) frequency synthesizer. The radio features a double conversion receiver and a direct FM transmitter modulator.

3.1 Technical specification of EUT

Equipment Type	: Hand-portable
Performance Specifications	: FCC PART90 & INDUSTRY CANADA RSS-119 CERTIFICATION
Band	: VHF (148 ~ 174 MHz)
Channel Spacings	: 12.5 kHz / 25 kHz
RF Output Power	: 5 / 1 Watt
Modulation Type	: 8.5KOF3E /16KOF3E (FM)
Audio Power	: 500 mW (EXT with 8 Ω) 1 W (INT with 4 Ω)
Intermediate Frequencies	: 1st 45.1 MHz 2nd 455 kHz
Channels	: 16 Channel
Frequency Source	: Synthesizer Ni-MH (1550 mA)
Power Supply	: 7.5 Vdc NOMIN ±10% Vdc EXTER
Inter-modulation	: < -65dB
Spurious and image rejection	: < -70dB
Maximum Audio Output	: More than 1W
Audio Distortion	: less than 5%

3.2 EUT operating conditions & test configuration

3.2.1 Client Condition

Temperature : -30 °C ~ +60 °C

Humidity : 95 %

3.2.2 EUT Operating Condition

Operating Mode : Transmitter was operated in a continues transmission mode with the carrier modulated as specified in the test data.

Special test Software : Not Used.

Special test Hardware : Not Used.

TX Frequency Band : 148 MHz ~ 174 MHz

Test Frequencies :	1st	148.025 MHz
	2nd	161.025 MHz
	3rd	173.975 MHz

Modulation : FM Modulation

Modulation Signal Source : External Source

4. Summary of Test Results

TEST REQUIREMENTS	FCC Paragraph	IC Paragraph	Result
Power Line Conducted Emission	§15.207	RSS-Gen §7.2.2	Pass
RF Power Output (Conducted)	§2.1046	RSS-Gen §6	Pass
Audio Frequency Response	§2.1047(A)	RSS-119 Issue 9 §6.2	Pass
Audio Low pass Filter Response	§2.1047(A)	RSS-119 Issue 9 §6.6	Pass
Modulation Limiting	§2.1047(B)	RSS-119 Issue 9 §6.6	Pass
Occupied Bandwidth	§2.1049	RSS-119 Issue 9 §6.6	Pass
Spurious Emissions at Antenna Terminals	§2.1051	RSS-119 Issue 9 §6.4	Pass
Field Strength of Spurious Radiation	§2.1053	RSS-119 Issue 9 §6.3	Pass
Frequency Stability/Temperature Variation	§2.1055	RSS-119 Issue 9 §7.0	Pass
Transient Frequency Behavior	§90.214	RSS-119 Issue 9 §7.0	Pass

5. TEST DATA

5.1 Power Line Conducted Emission

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 kHz on the 230V AC power and return leads of the EUT according to the methods defined in FCC Part 15.207. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 3.1.5. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position producing maximum conducted emissions.

5.1.1 Test Condition

Frequency Range of Test : 150 kHz to 30 MHz

Test Standard : FCC Part 15.207

Test Date : October 29, 2008

Temperature/Humidity : 26 °C/ 42 %

5.1.2 Test Standard

Item	Frequency Range (MHz)	Limit (dBuV)	
		Quasi-Peak	Average-Peak
<input type="checkbox"/>	Class A	0.15 ~ 0.5	79
		0.5 ~ 30	73
<input checked="" type="checkbox"/>	Class B	0.15 ~ 0.5	66 – 56
		0.5 ~ 5	56
		5 ~ 30	60
			50

5.1.3 Test Equipment List

Equipment Type	Model	Manufacture	Serial No	Cal Due Date
TEST RECEIVER	ESPI	ROHDE & SCHWARZ	100063	11. 19. 2009
Conducted Cable	N/A	N/A	N/A	N/A
LISN	FCC-LISN-50-50-2-02	FCC	03074	11. 02. 2009

5.1.4 Test Result of Power Line Conducted Emission

EUT : **SP1102**
Input Voltage : **230V, 50Hz**

Power Line Conducted Emission Test Results : **PASS**


Test data sheets follow.

Freq [MHz]	Correction		Phase [H/N]	Quasi-Peak Mode				Average Mode				
	AMN	C.L		Limit	Reading	Emission Level	Margin	Limit	Reading	Emission Level	Margin	
				[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	
0.150	0.06	0.03	H	66.00	63.95	64.04	1.96	56.00	44.64	44.73	11.27	
0.190	0.06	0.03	H	64.90	59.99	60.08	4.82	54.90	31.75	31.84	23.06	
0.210	0.07	0.10	N	64.30	59.56	59.73	4.57	54.30	27.67	27.84	26.46	
0.278	0.07	0.16	H	62.40	53.89	54.12	8.28	52.40	37.33	37.56	14.84	
0.338	0.08	0.22	N	60.70	50.13	50.43	10.27	50.70	27.26	27.56	23.14	
0.402	0.08	0.26	H	56.00	47.67	48.01	7.99	46.00	41.16	41.50	4.50	

Notes:


1. All modes of operation were investigated and the worst-case emissions are reported.
See [the plots](#) in next 2 pages.
2. Line N = (Neutral), Line H = (Hot)
3. Measurement uncertainty estimated at ± 1.38 dB.
The measurement uncertainty is given with a confidence of 95.45 % with the coverage factor, $k=2$

PLOTS OF EMISSIONS

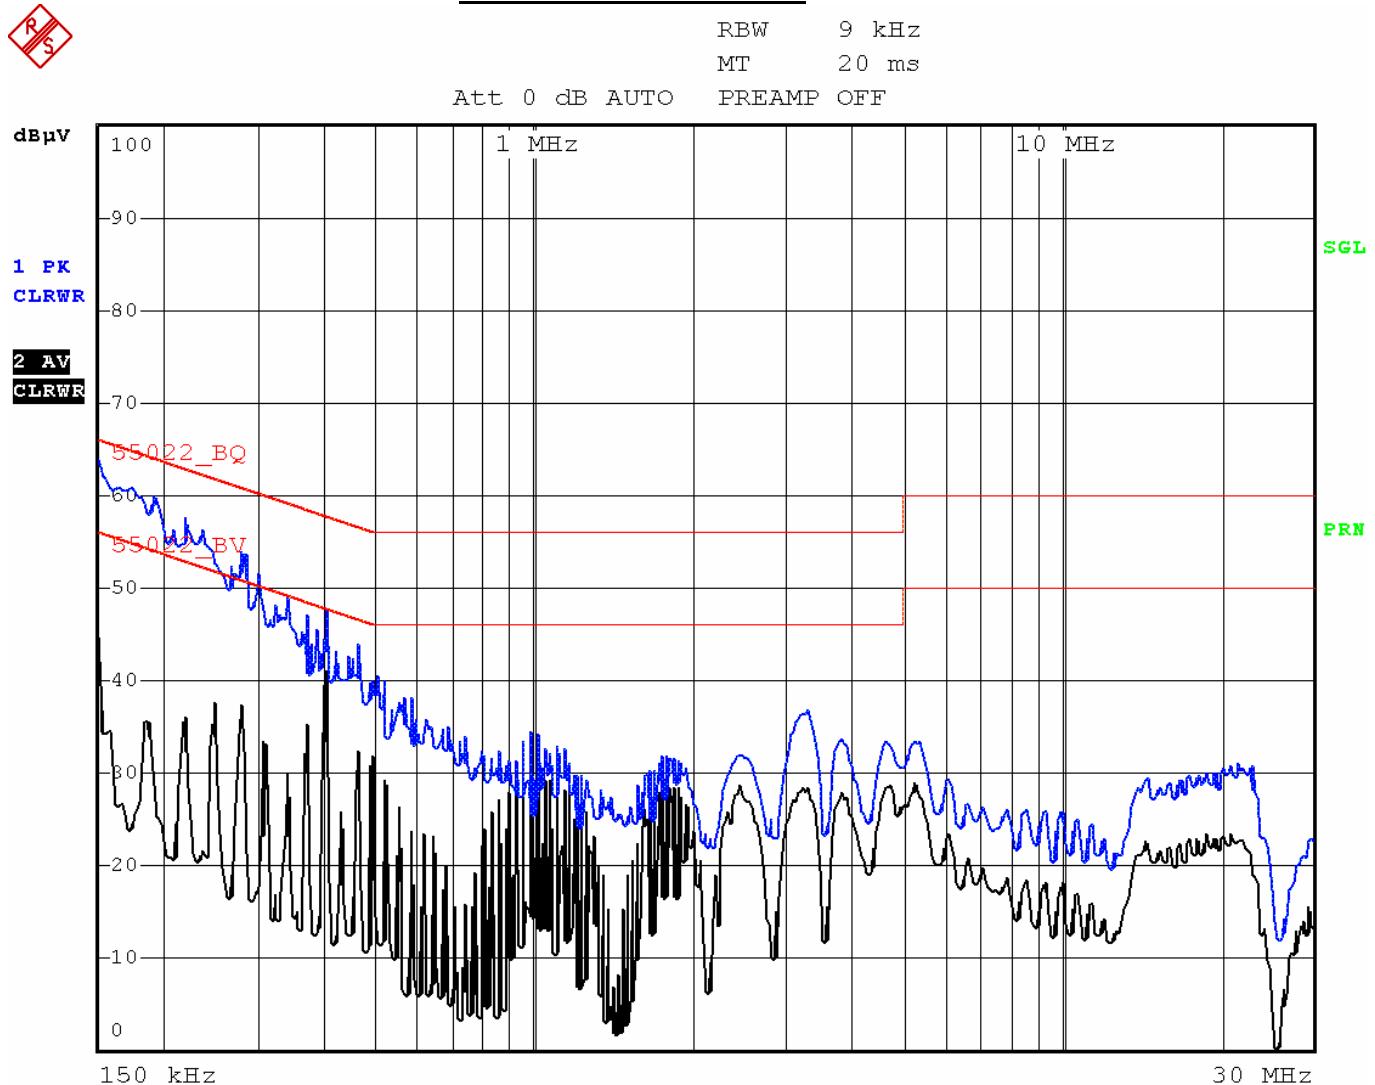

Test Model: SP1102
Test Mode: HOT
Classification: FCC Part 15.207

PLOTS OF EMISSIONS

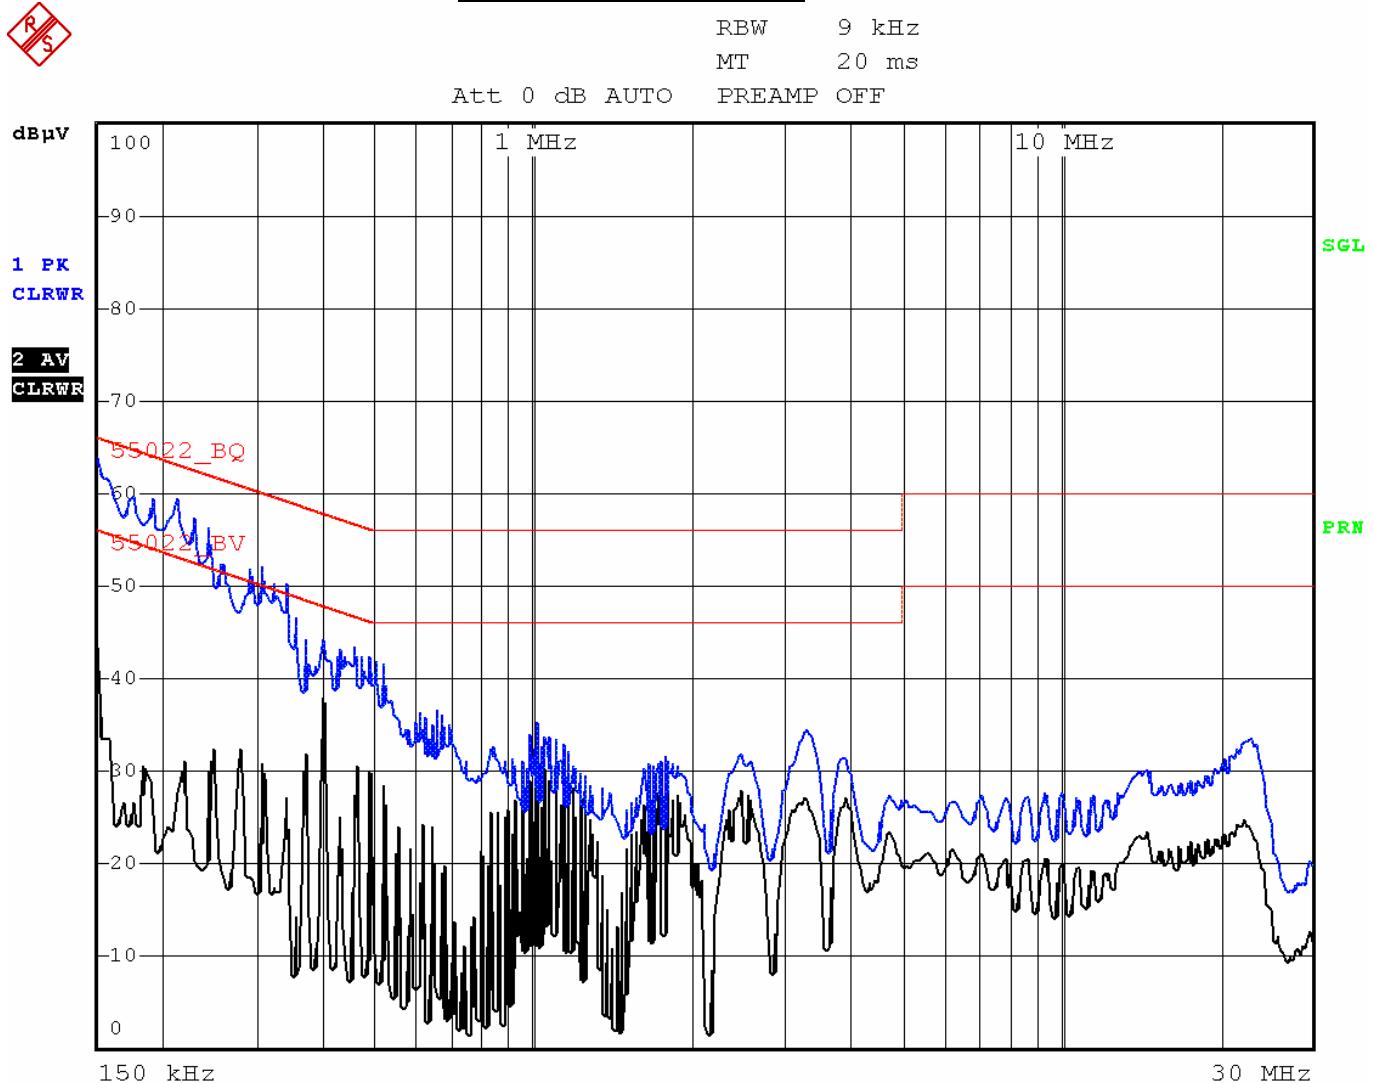

Test Model: SP1102
Test Mode: NEUTRAL
Classification: FCC Part 15.207

5.2 RF Power Output (Conducted)

5.2.1 Specification

FCC Rules Part 2, Section 2.1046
FCC Rules Part 90, Section 90.205(d)
Industry Canada, RSS-119 Section 6.2

5.2.2 Method of Measurement

ANSI/TIA-603-B-2002 Section 2.2.1

5.2.3 Measurement Set-Up

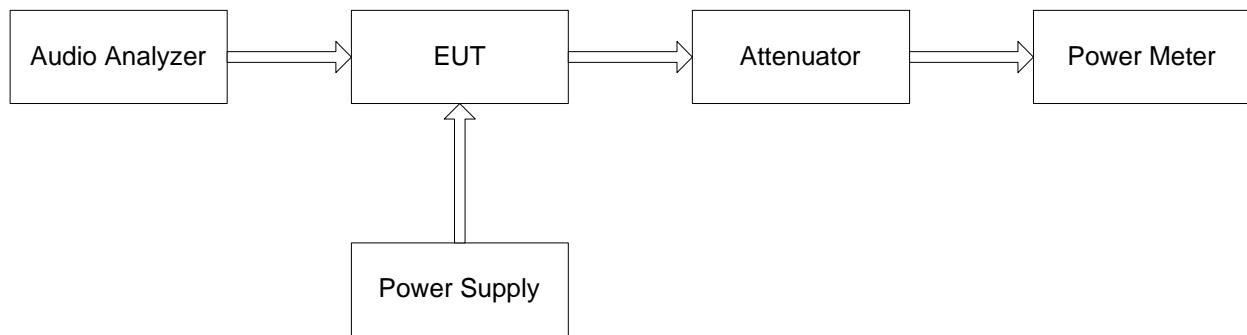


Fig.1

5.2.4 Test Equipment List

Equipment	Model Name	Manufacturer
EUT	SP1102	Maxon CIC Corp.
Power Supply	IPS-30B03DD	INTERACT
Audio Analyzer	8903B	Agilent
Attenuator	33-30-33	WEINSCHEL
Power Sensor	8481A	Agilent
Power Meter	E4418A	Agilent

5.2.5 Test Procedure

- The unit was turn-up in accordance with the alignment procedure stated in the FIG. 1 , and was loaded into a 50 ohm resistive termination.
- The unit was powered through its normally accompanied power cord by a DC power supply.
- Power supply voltage was set to nominal voltage at the power supply terminals with transmitter off.
- The unit was operated for three consecutive test cycles of 15 minutes standby and 5 minutes in transmitting.
- The EUT was aligned for transmitter operation on three frequencies(Fo) at full rated power per the tune-up procedure outlined in the Product Specification. This represents frequencies at the 1st, 2nd, 3rd and 4th end of the EUT operating frequency band.

5.2.6 Test Result

Test Mode	Frequency (MHz)	Measured Power Output (dBm)	Rated Power (Watts)	FCC Limit (Watts)
Low Power (1W)	148.025	29.21	0.83	Varies
	161.025	29.68	0.93	Varies
	173.975	29.56	0.90	Varies
High Power (5W)	148.025	36.38	4.35	Varies
	161.025	36.98	4.99	Varies
	173.975	36.59	4.56	Varies

5.3 Modulation Characteristics – Audio Frequency Response

5.3.1 Specification

FCC Rules Part 2, Section 2.1047(a)
FCC Rules Part 90, Section 90.207 & 90.242(b)(8)
Industry Canada, RSS-119 Section 6.6

5.3.2 Method of Measurement

ANSI/TIA-603-B-2002 Section 2.2.6

5.3.3 Measurement Set-Up

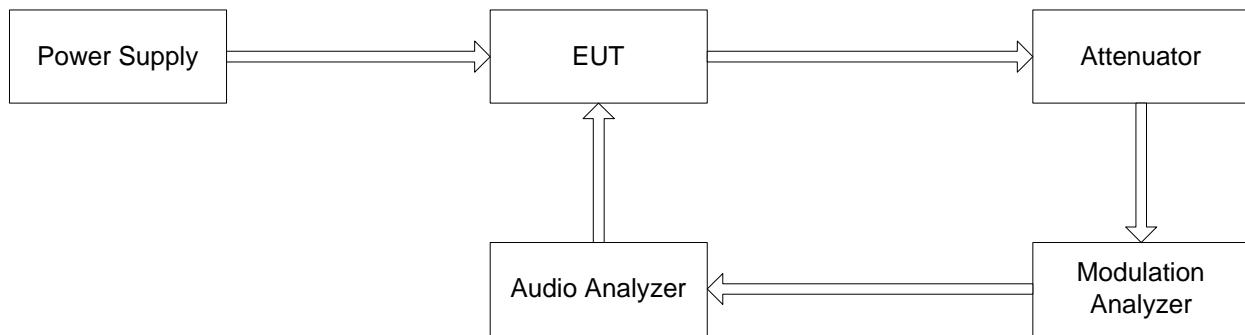


Fig.2

5.3.4 Test Equipment List

Equipment	Model Name	Manufacturer
EUT	SP1102	Maxon CIC Corp.
Power Supply	IPS-30B03DD	INTERACT
Audio Analyzer	8903B	Agilent
Modulation Analyzer	8901B	Agilent
Attenuator	33-30-33	WEINSCHEL

5.3.5 Test Procedure

- The unit was turn-up in accordance with the alignment procedure stated in the FIG. 2 , and was loaded into a 50 ohm resistive termination.
- The audio analyzer was connected to the audio input circuit/microphone of the EUT.
- The audio signal input was adjusted to obtain 20% modulation at 1 kHz, and this point was taken as the 0 dB reference level.
- With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 100 Hz to 10 kHz.
- The response in dB relative to 1 kHz was then measured, using the HP 8901A Modulation Analyzer.
- No limit is required by the FCC for audio frequency response. The measured audio response data shows the role-off curve at 3 kHz.


5.3.6 Test Results

5.3.6.1 Test Data 1

FCC Rules :	Part 2 §2.1047(a) & §90.242(b)(8)	
IC Rules :	RSS-119 Section 6.6	
Operating Frequency :	148.025 MHz	
Channel :	1st Channel	
Reference Voltage :	7.5 VDC	
Power Output :	5 Watts	

Audio Input Frequency (Hz)	Attenuation (dB)	
	Channel Spacing : 12.5 kHz	Channel Spacing : 25 kHz
100	-22.86	-28.90
200	-22.48	-28.61
300	-15.83	-16.90
400	-9.45	-9.70
500	-7.77	-7.84
600	-6.13	-6.18
700	-4.45	-4.50
800	-2.83	-2.85
900	-1.34	-1.37
1000	0.00	0.00
1500	3.05	4.02
2000	6.20	6.16
2500	8.33	8.99
3000	8.38	9.72
4000	2.50	4.00
5000	-4.30	-2.78
6000	-10.33	-8.89
7000	-15.07	-14.18
8000	-18.61	-18.94
9000	-20.32	-22.71
10000	-21.23	-25.27

5.3.6.2 Graph

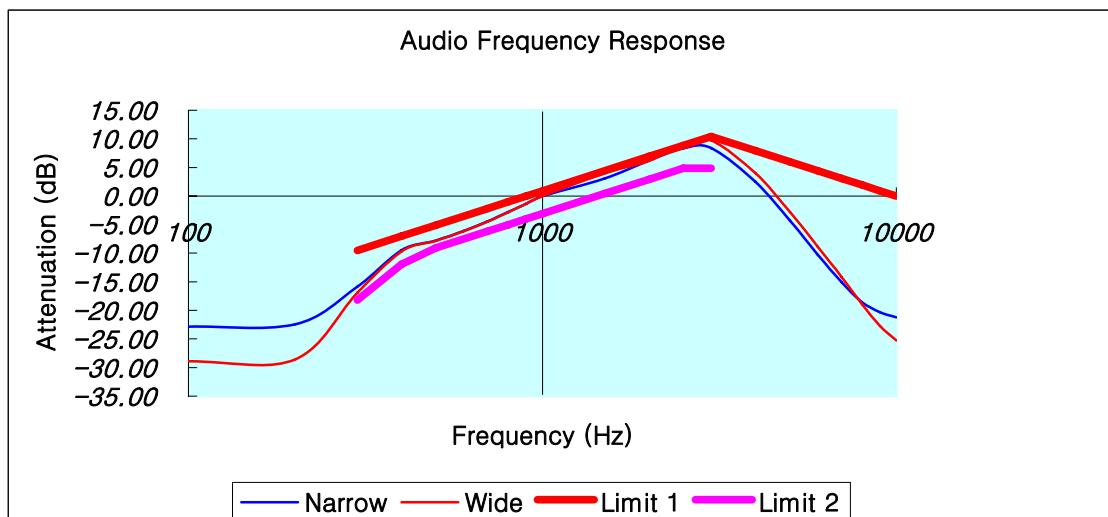


5.3.6.3 Test Data 2

FCC Rules :	Part 2 §2.1047(a) & §90.242(b)(8)	
IC Rules :	RSS-119 Section 6.6	
Operating Frequency :	161.025 MHz	
Channel :	2nd Channel	
Reference Voltage :	7.5 VDC	
Power Output :	5 Watts	

Audio Input Frequency (Hz)	Attenuation (dB)	
	Channel Spacing : 12.5 kHz	Channel Spacing : 25 kHz
100	-27.55	-30.52
200	-27.29	-30.02
300	-16.57	-16.87
400	-9.67	-9.67
500	-7.87	-7.87
600	-6.22	-6.22
700	-4.52	-4.52
800	-2.85	-2.88
900	-1.37	-1.37
1000	0.00	0.00
1500	4.04	4.05
2000	6.19	6.93
2500	8.31	8.97
3000	8.35	9.82
4000	2.45	4.26
5000	-4.37	-2.48
6000	-10.49	-8.59
7000	-15.76	-13.91
8000	-20.30	-18.77
9000	-23.45	-22.82
10000	-25.54	-25.90

5.3.6.4 Graph 2

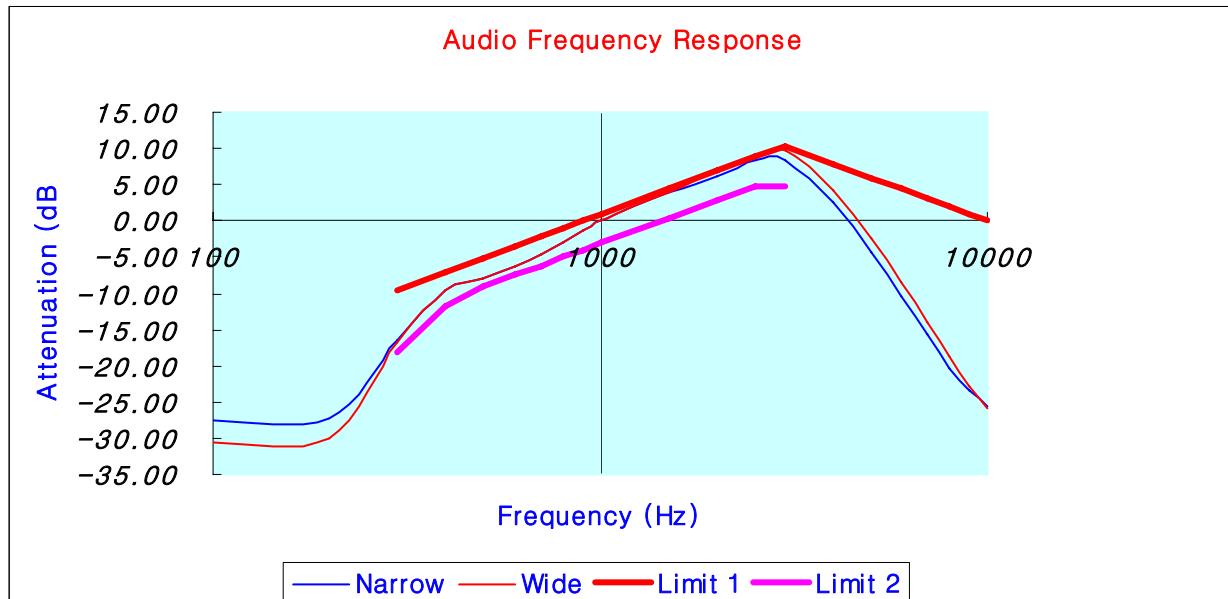


5.3.6.5 Test Data 3

FCC Rules :	Part 2 §2.1047(a) & §90.242(b)(8)	
IC Rules :	RSS-119 Section 6.6	
Operating Frequency :	173.975 MHz	
Channel :	3rd Channel	
Reference Voltage :	7.5 VDC	
Power Output :	5 Watts	

Audio Input Frequency (Hz)	Attenuation (dB)	
	Channel Spacing : 12.5 kHz	Channel Spacing : 25 kHz
100	-25.87	-28.74
200	-26.1	-28.15
300	-16.4	-16.83
400	-9.58	-9.66
500	-7.78	-7.86
600	-6.16	-6.22
700	-4.48	-4.51
800	-2.84	-2.85
900	-1.37	-1.38
1000	0	0
1500	4.06	5.03
2000	6.23	6.19
2500	8.96	8.98
3000	9.27	9.84
4000	3.57	4.3
5000	-3.19	-2.43
6000	-9.21	-8.49
7000	-14.38	-13.81
8000	-18.81	-18.45
9000	-22.04	-22.34
10000	-23.43	-25.63

5.3.6.6 Graph 3

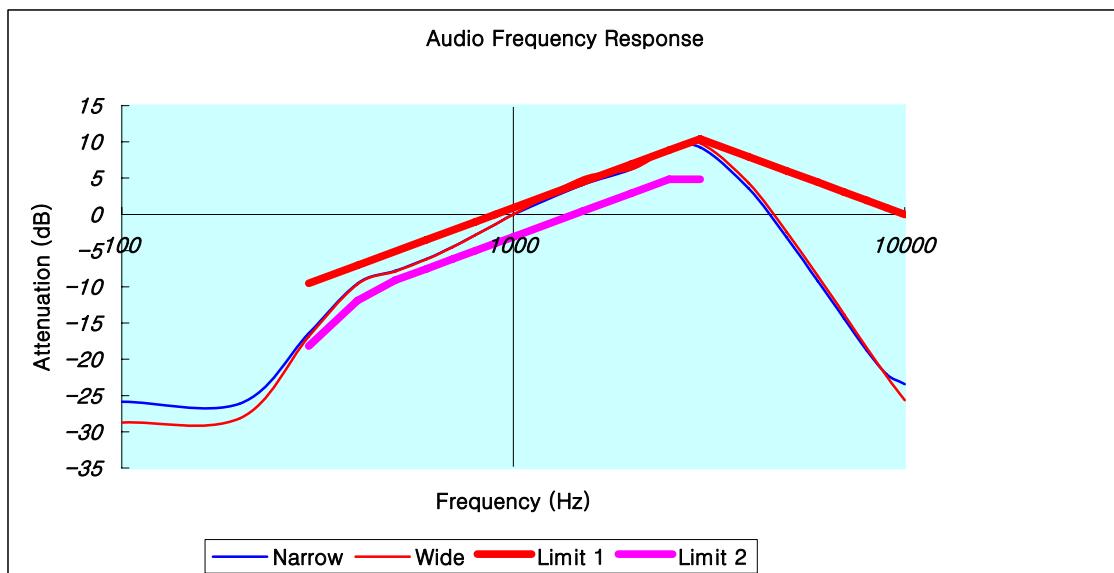

5.4 Modulation Characteristics – Audio Low pass Filter Response

5.4.1 Specification

FCC Rules Part 2, Section 2.1047(a)
FCC Rules Part 90, Section 90.207 & 90.242(b)(8)
Industry Canada, RSS-119 Section 6.6

5.4.2 Method of Measurement

ANSI/TIA-603-B-2002 Section 2.2.15

5.4.3 Measurement Set-Up

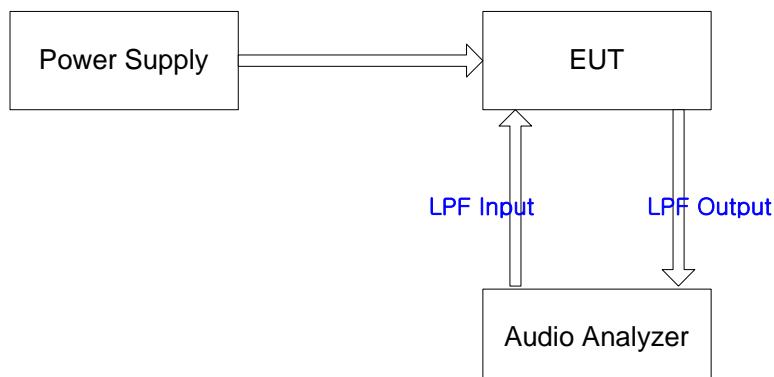


Fig.3

5.4.4 Test Equipment List

Equipment	Model Name	Manufacturer
EUT	SP1102	Maxon CIC Corp.
Power Supply	IPS-30B03DD	INTERACT
Audio Analyzer	8903B	Agilent

5.4.5 Test Procedure


- The unit was turn-up in accordance with the alignment procedure stated in the FIG. 3 , and was loaded into a 50 ohm resistive termination.
- To measure the audio low pass filter response, an audio analyzer were connected to the actual Printed Circuit Board of the transmitter.
- Audio analyzer monitored the output of the audio filter.
- An AF input level was maintained constant at least 10 dB below the saturation level at 1 kHz tone.
- Record the dB level of the 1 kHz tone of the audio analyzer.
- Set the audio input frequency to desired test frequency between 3 kHz and upper low pass filter limit.
- Record dB level on the audio analyzer.
- Calculate the audio frequency response as $LEV_{FREQ} - LEV_{REF}$
- Audio frequencies in 3 kHz to 20 kHz : Minimum Attenuation to reference point shell be greater than $60\log(f/3)$ dB, above 20 kHz, at least 50dB attenuation. ("f" in kHz)

5.4.5 Test Result

5.4.5.1 Data

Audio Input Frequency (Hz)	Attenuation (dB)	Limit (dB)
100	-0.4	
200	0	-
400	0.3	-
600	0.3	-
800	0.3	-
1000	0	-
1500	0.6	-
2000	1.9	-
2500	-0.4	-
3000	-4.4	0
3500	-12.8	-6.7
4000	-19.2	-12.5
4500	-28.2	-17.6
5000	-34.6	-22.2
6000	-46.8	-30.1
7000	-58.4	-36.8
8000	<< -42.6	-42.6
9000	<< -47.7	-47.7
10000	<< -52.3	-52.3

5.4.5.2 Graph

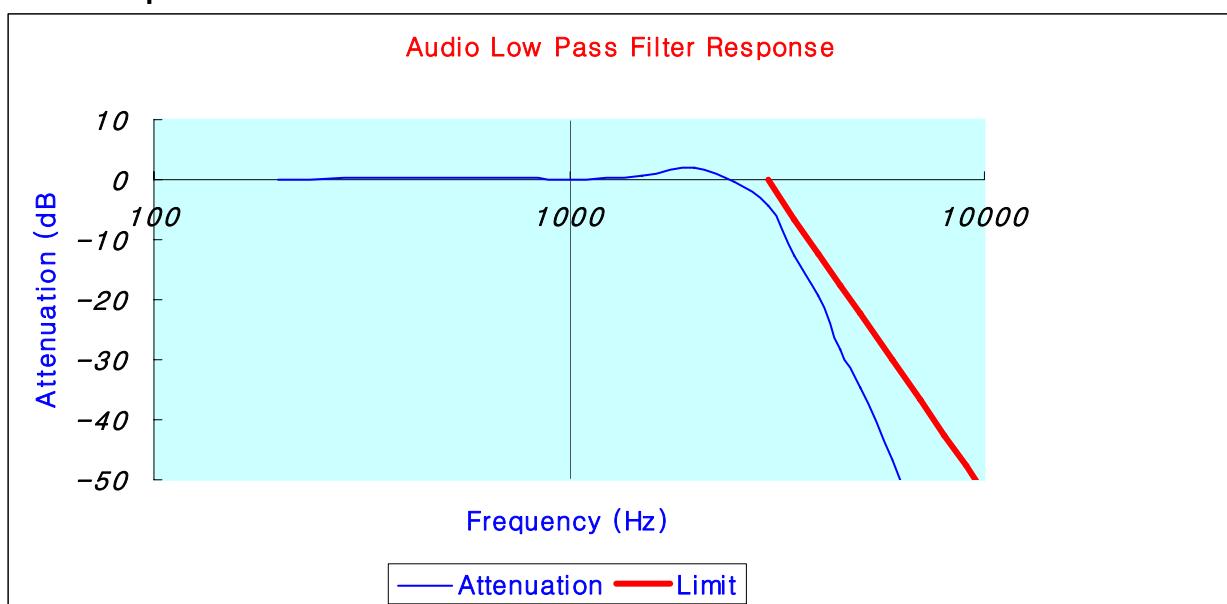

5.5 Modulation Characteristics – Modulation Limiting

5.5.1 Specification

FCC Rules Part 2, Section 2.1047(b)
FCC Rules Part 90, Section 90.207
Industry Canada, RSS-119 Section 6.6

5.5.2 Method of Measurement

ANSI/TIA-603-B-2002 Section 2.2.3

5.5.3 Measurement Set-Up

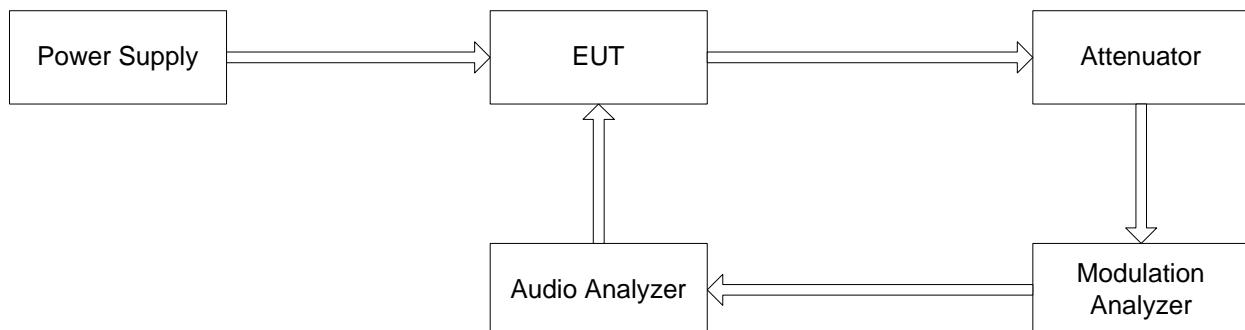


Fig.4

5.5.4 Test Equipment List

Equipment	Model Name	Manufacturer
EUT	SP1102	Maxon CIC Corp.
Power Supply	IPS-30B03DD	INTERACT
Audio Analyzer	8903B	Agilent
Modulation Analyzer	8901B	Agilent
Attenuator	33-30-33	WEINSCHEL

5.5.5 Test Procedure

- The unit was turn-up in accordance with the alignment procedure stated in the FIG. 4, and was loaded into a 50 ohm resistive termination.
- Apply an 1kHz modulating signal to EUT from the audio frequency analyzer, and adjust the level to obtain 60% of full rated system deviation.
- Increase the level from the AF generator by ± 20 dB in one step.
- Measure the steady-state deviation.
- With the AF generator level hold constant, vary the audio frequency from 300 Hz to 3000 Hz. Record the maximum deviation.
- Set the modulation analyzer to measure the peak negative deviation and repeat the test above.

5.5.6 Test Result

5.5.6.1 Data (Narrow Band, 1st Channel)

Audio Input Level (dB)	Positive Peak Deviation (kHz)			Negative Peak Deviation (kHz)		
	300 Hz	1 kHz	3 kHz	300 Hz	1 kHz	3 kHz
-20	0.17	0.23	0.58	0.08	0.28	0.33
-15	0.19	0.34	0.98	0.09	0.38	0.55
-10	0.21	0.52	1.49	0.11	0.57	0.91
-5	0.24	0.87	1.63	0.14	0.91	1.41
0	0.28	1.5	1.64	0.22	1.5	1.54
+5	0.38	1.82	1.69	0.32	1.88	1.45
+10	0.55	1.88	1.72	0.53	1.94	1.4
+15	0.88	1.88	1.59	0.89	1.95	1.37
+20	1.88	1.88	1.54	1.79	1.95	1.37

5.5.6.2 Data (Narrow Band, 2nd Channel)

Audio Input Level (dB)	Positive Peak Deviation (kHz)			Negative Peak Deviation (kHz)		
	300 Hz	1 kHz	3 kHz	300 Hz	1 kHz	3 kHz
-20	0.07	0.19	0.54	0.07	0.2	0.53
-15	0.09	0.32	0.91	0.08	0.31	0.9
-10	0.1	0.52	1.45	0.09	0.51	1.44
-5	0.14	0.87	1.6	0.13	0.87	1.58
0	0.19	1.5	1.6	0.19	1.5	1.59
+5	0.29	1.84	1.54	0.3	1.85	1.52
+10	0.49	1.93	1.47	0.5	1.9	1.46
+15	0.82	1.93	1.43	0.86	1.9	1.42
+20	1.9	1.94	1.42	1.88	1.9	1.42

5.5.6.3 Data (Narrow Band, 3rd Channel)

Audio Input Level (dB)	Positive Peak Deviation (kHz)			Negative Peak Deviation (kHz)		
	300 Hz	1 kHz	3 kHz	300 Hz	1 kHz	3 kHz
-20	0.08	0.21	0.54	0.08	0.2	0.54
-15	0.09	0.33	0.9	0.09	0.33	0.91
-10	0.11	0.52	1.52	0.1	0.52	1.53
-5	0.14	0.88	1.78	0.14	0.87	1.77
0	0.19	1.5	1.79	0.19	1.5	1.78
+5	0.29	2.02	1.73	0.29	2.03	1.73
+10	0.48	2.17	1.64	0.48	2.13	1.65
+15	0.81	2.18	1.59	0.8	2.13	1.6
+20	2.17	2.18	1.56	2.1	2.13	1.58

5.5.6.5 Data (WideBand, 1st Channel)

Audio Input Level (dB)	Positive Peak Deviation (kHz)			Negative Peak Deviation (kHz)		
	300 Hz	1 kHz	3 kHz	300 Hz	1 kHz	3 kHz
-20	0.14	0.38	1.07	0.11	0.39	1.01
-15	0.16	0.61	1.8	0.13	0.63	1.73
-10	0.19	1.03	2.99	0.17	1.01	2.95
-5	0.25	1.74	3.37	0.22	1.71	3.42
0	0.37	3	3.4	0.39	3	3.44
+5	0.58	3.86	3.25	0.57	4.03	3.29
+10	0.97	4.08	3.09	0.95	4.21	3.12
+15	1.69	4.1	2.99	1.69	4.22	3.04
+20	3.94	4.1	2.98	4.06	4.22	3.01

5.5.6.6 Data (WideBand, 2nd Channel)


Audio Input Level (dB)	Positive Peak Deviation (kHz)			Negative Peak Deviation (kHz)		
	300 Hz	1 kHz	3 kHz	300 Hz	1 kHz	3 kHz
-20	0.09	0.36	1.04	0.09	0.35	1.03
-15	0.11	0.58	1.78	0.11	0.59	1.78
-10	0.15	0.99	3.01	0.15	0.99	3.9
-5	0.22	1.71	3.45	0.22	1.71	3.45
0	0.33	3	3.48	0.33	3	3.48
+5	0.55	3.91	3.32	0.54	3.97	3.32
+10	0.92	4.19	3.16	0.92	4.15	3.18
+15	1.61	4.19	3.07	1.61	4.15	3.09
+20	4.04	4.19	3.03	4.05	4.16	3.07

5.5.6.7 Data (WideBand, 3rd Channel)


Audio Input Level (dB)	Positive Peak Deviation (kHz)			Negative Peak Deviation (kHz)		
	300 Hz	1 kHz	3 kHz	300 Hz	1 kHz	3 kHz
-20	0.1	0.37	1.02	0.1	0.35	1.04
-15	0.13	0.59	1.77	0.13	0.59	1.78
-10	0.17	0.99	2.99	0.18	0.99	3.01
-5	0.23	1.72	3.44	0.22	1.72	3.44
0	0.34	3	3.49	0.34	3	3.46
+5	0.57	3.95	3.33	0.54	3.98	3.34
+10	0.96	4.21	3.16	0.91	4.13	3.18
+15	1.66	4.22	3.06	1.59	4.14	3.11
+20	4.12	4.22	3.03	4.01	4.12	3.08

5.5.7 Graph


5.5.7.1 Narrow Band, 1st Channel, Positive

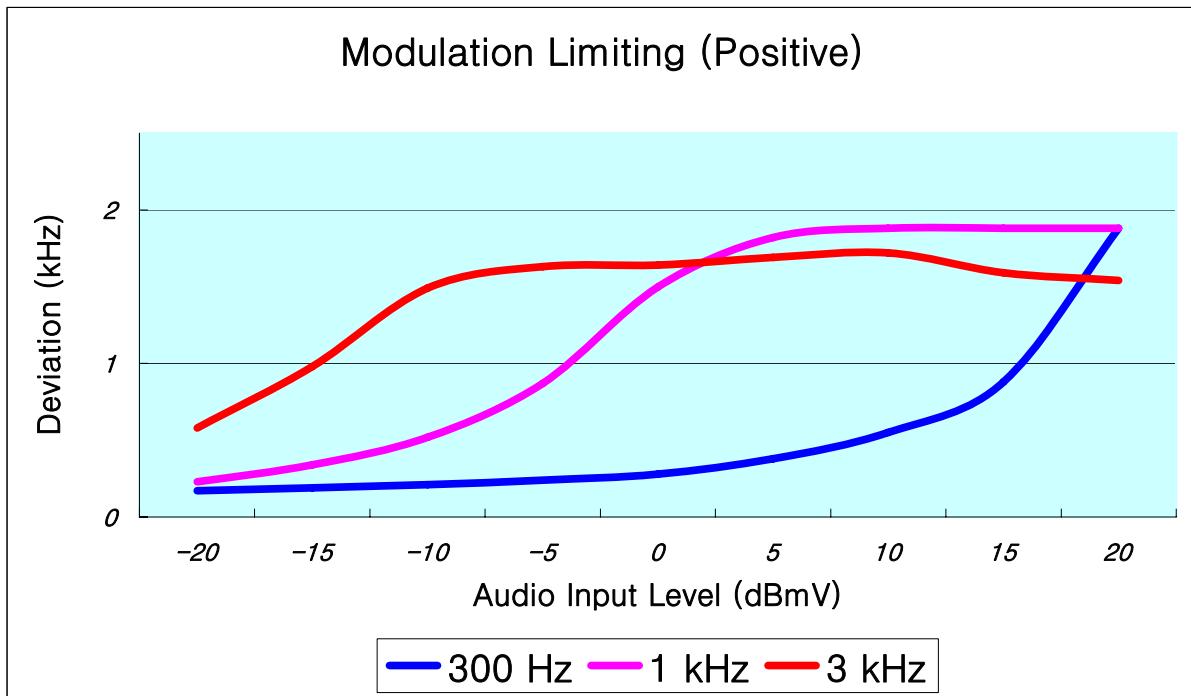


5.5.7.2 Narrow Band, 1st Channel, Negative

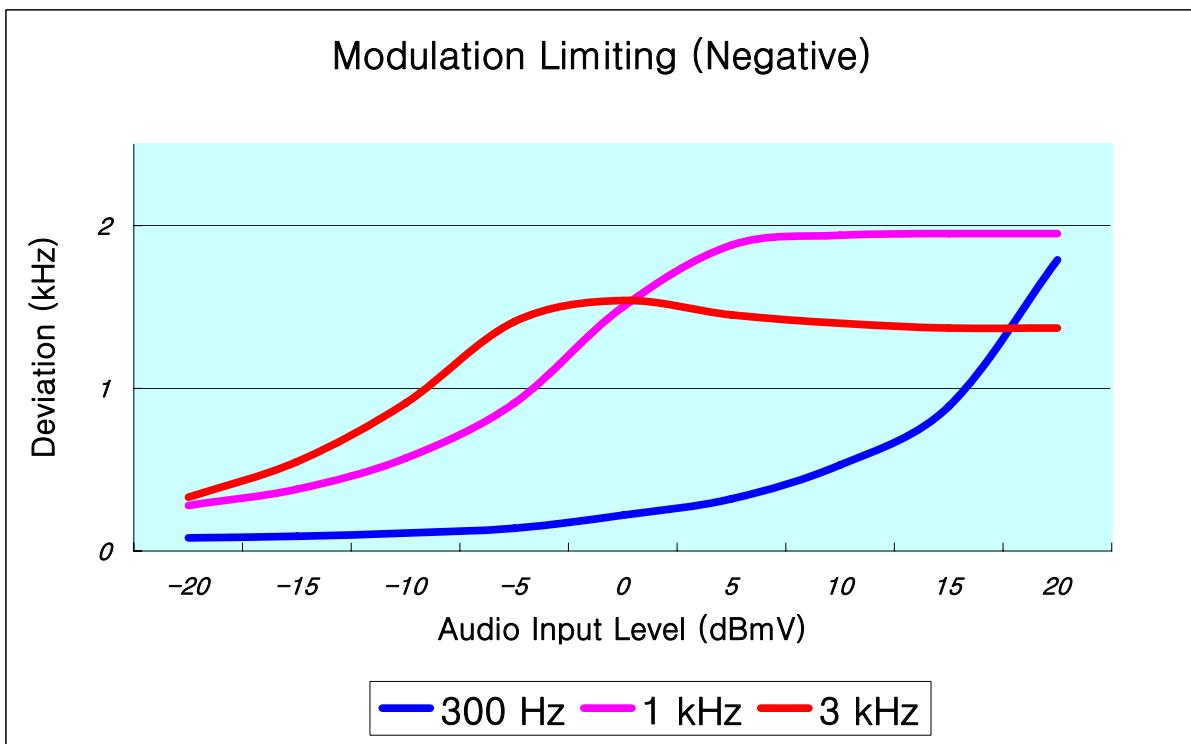


5.5.7.3 Narrow Band, 2nd Channel, Positive

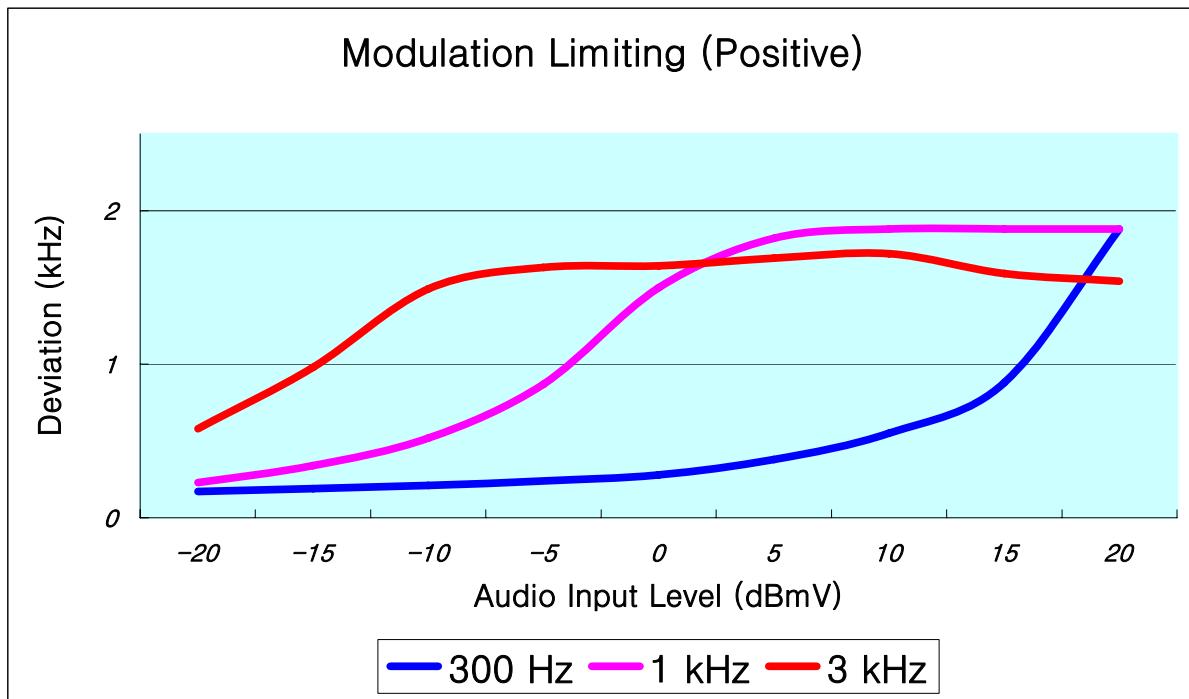


5.5.7.4 Narrow Band, 2nd Channel, Negative

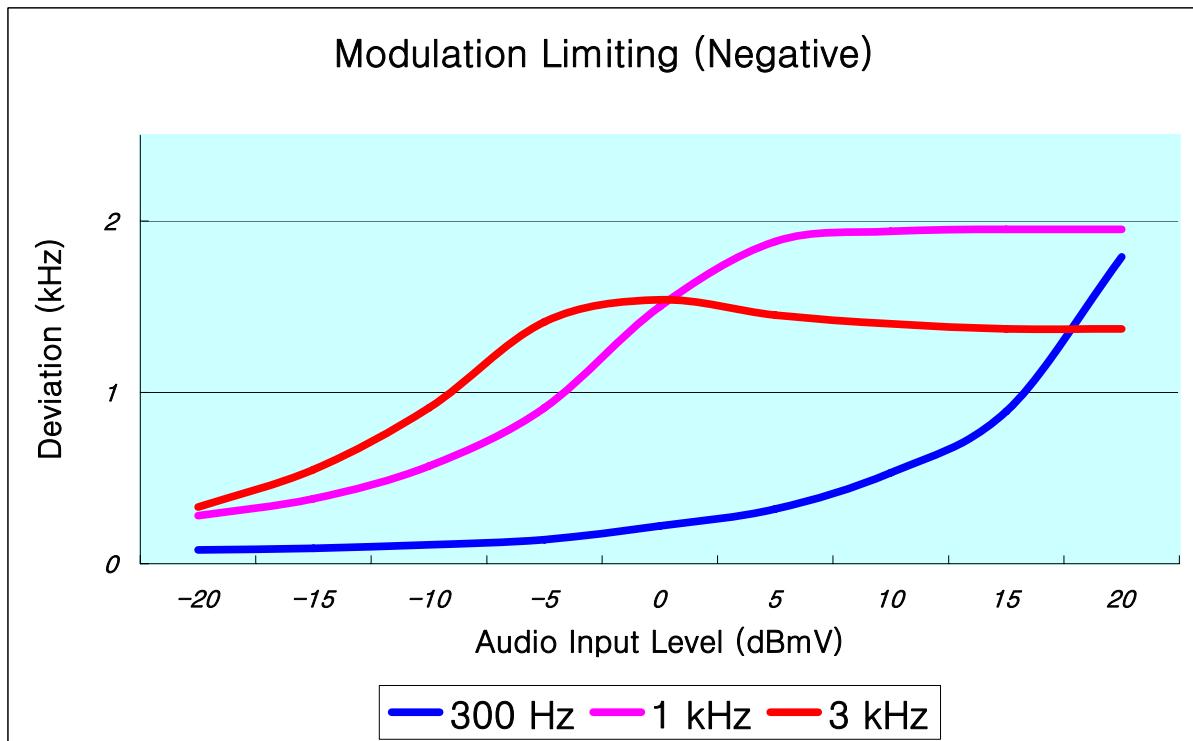


5.5.7.5 Narrow Band, 3rd Channel, Positive

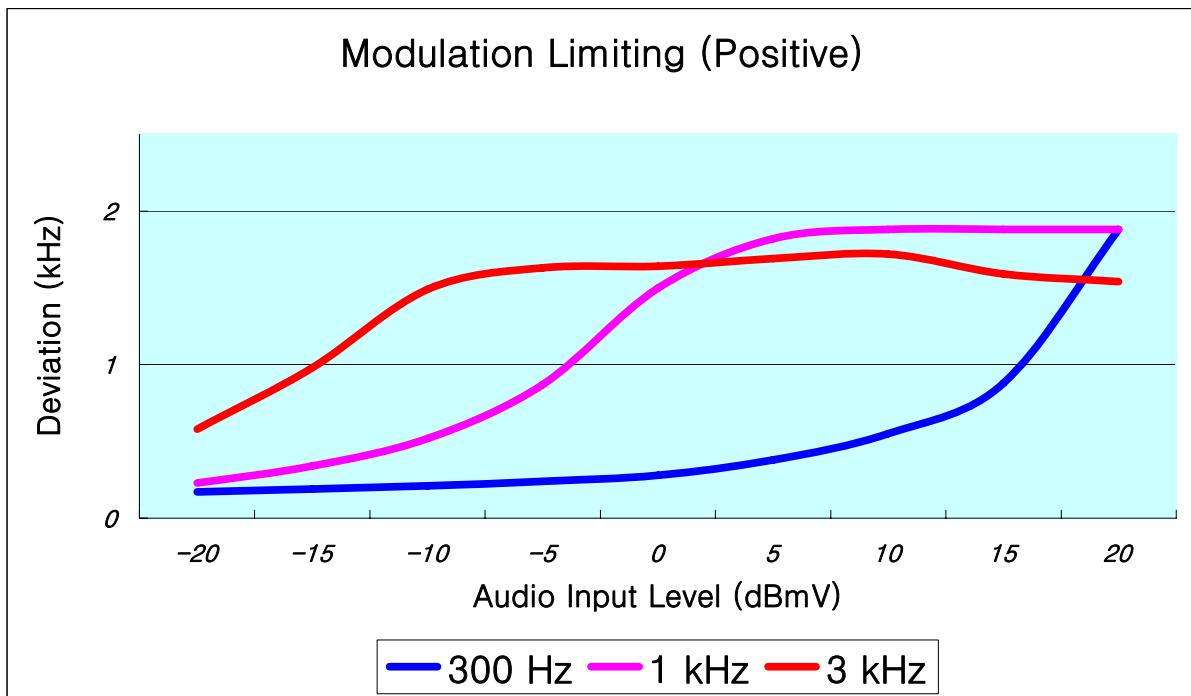


5.5.7.6 Narrow Band, 3rd Channel, Negative

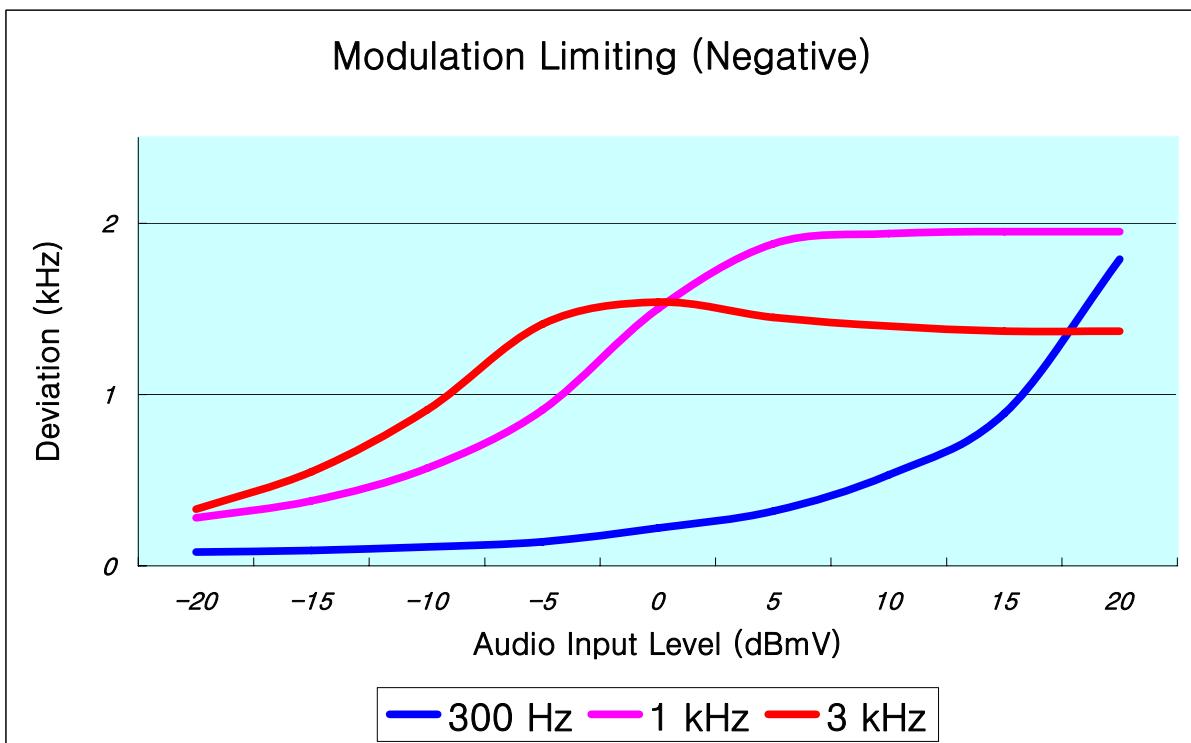


5.5.8.7 WideBand, 1st Channel, Positive

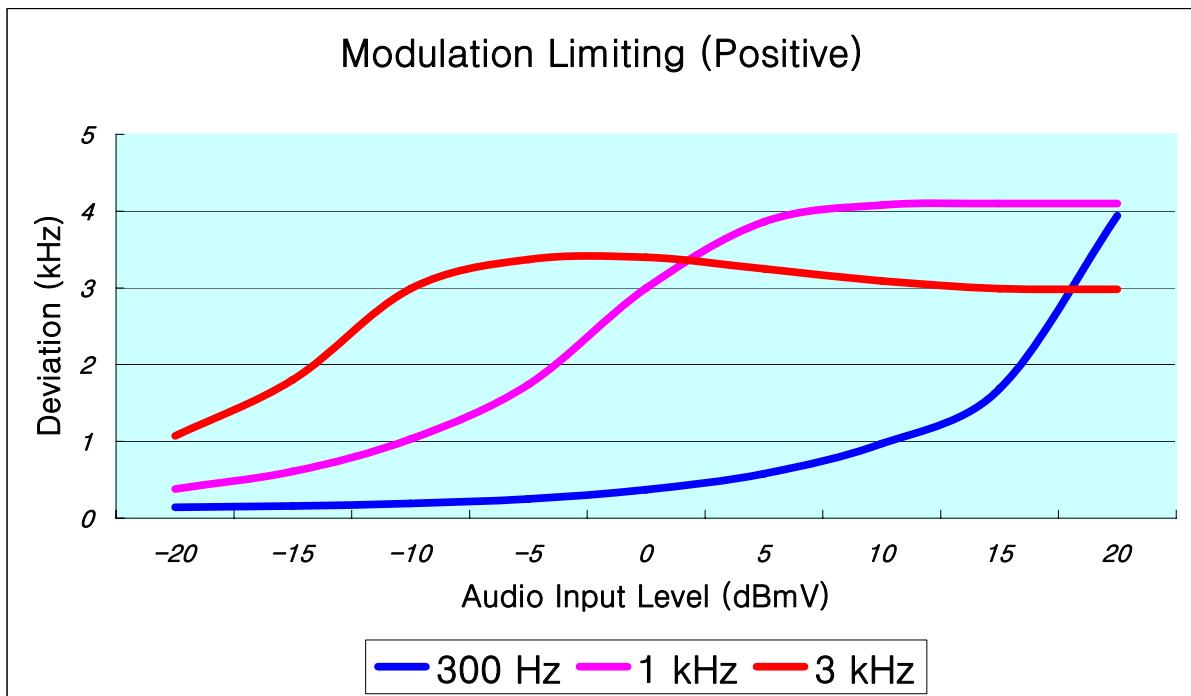


5.5.8.8 WideBand, 1st Channel, Negative

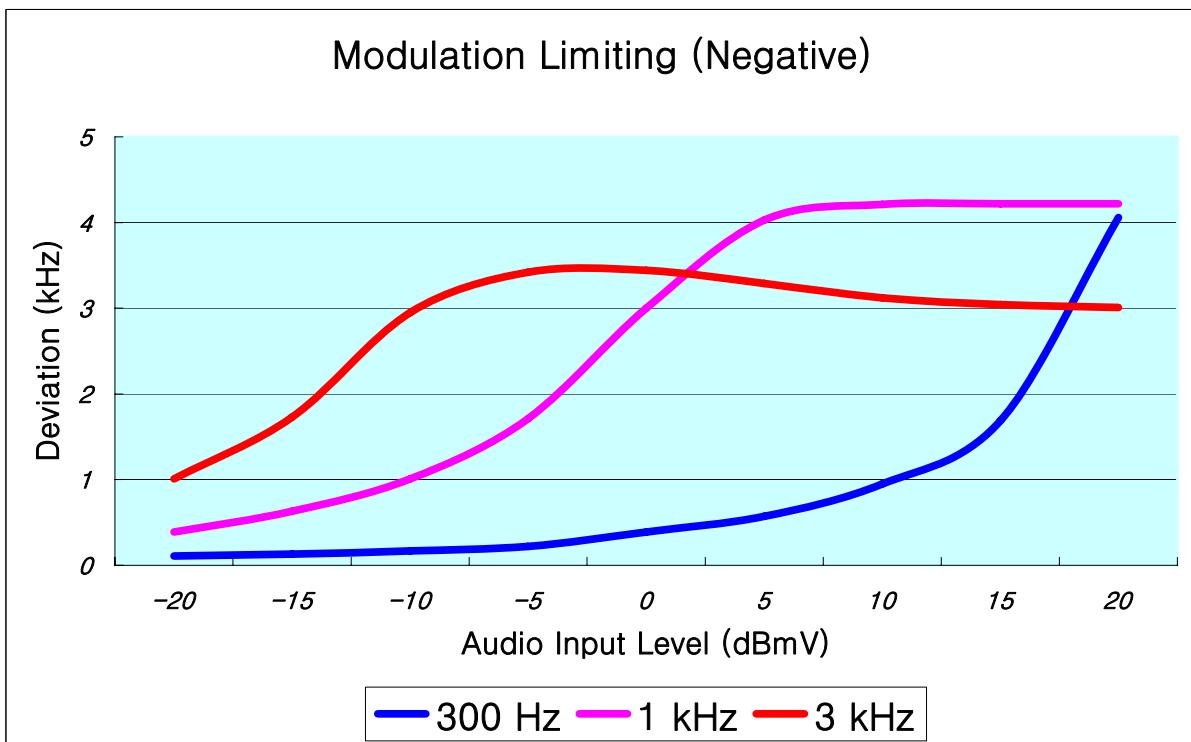


5.5.8.9 WideBand, 2nd Channel, Positive

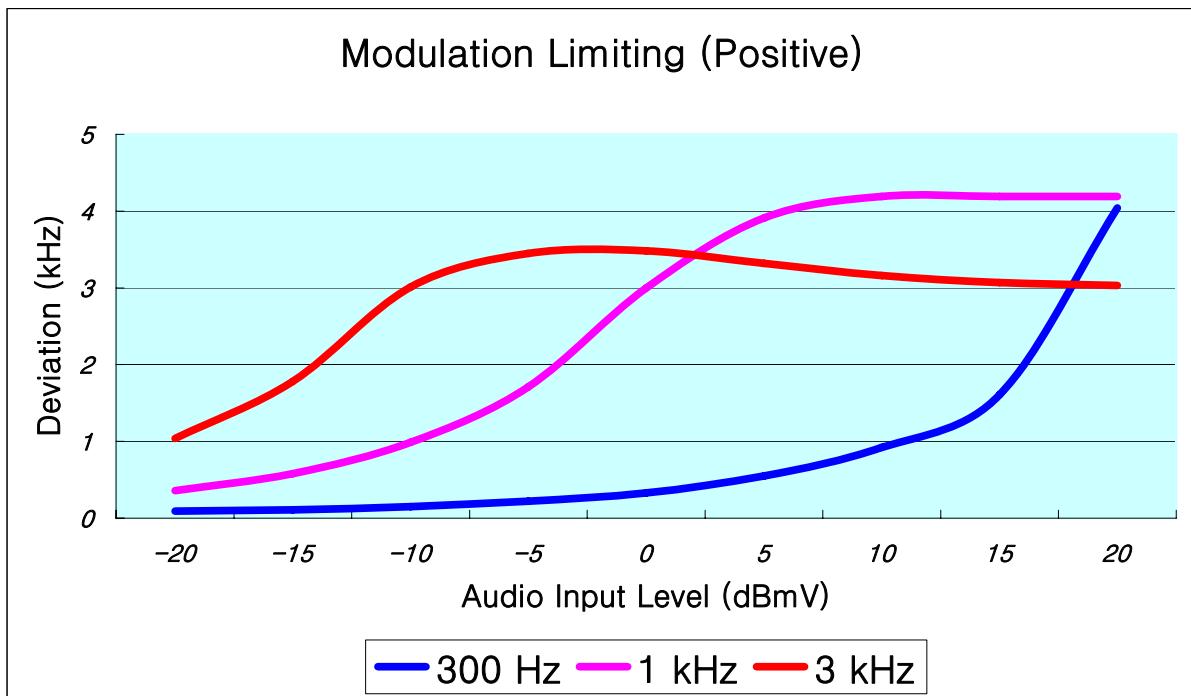


5.5.8.10 WideBand, 2nd Channel, Negative

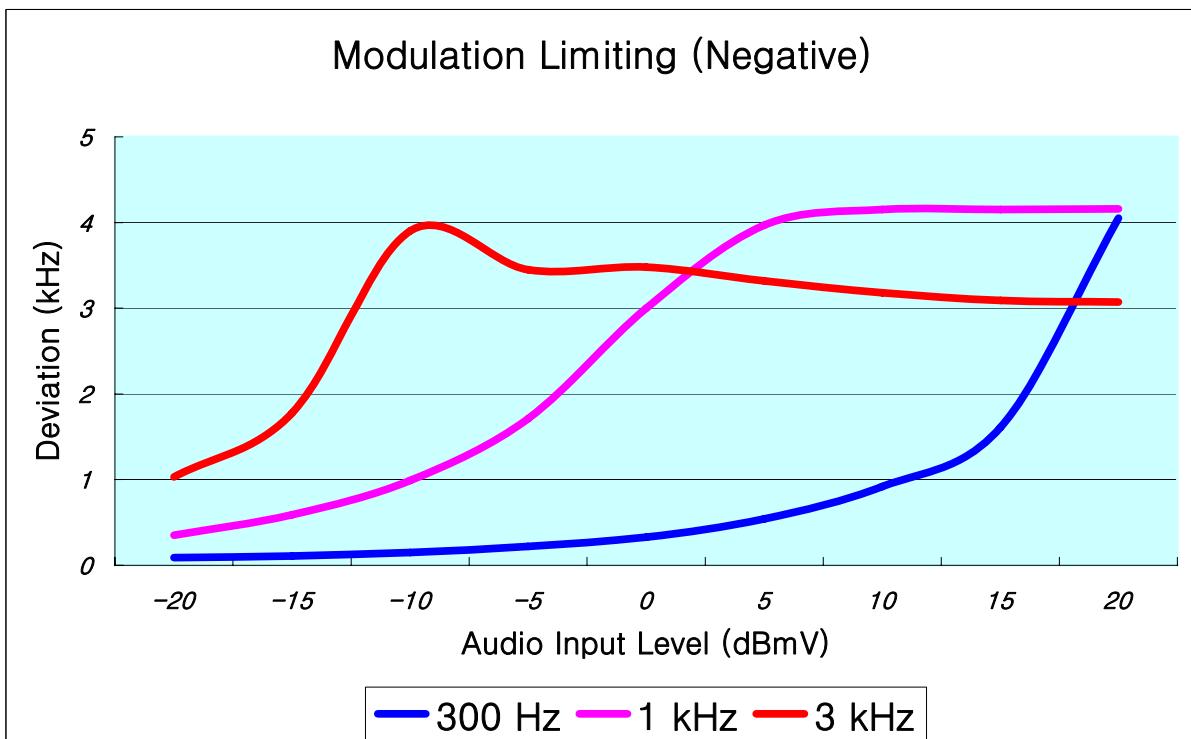

5.5.8.11 WideBand, 3rd Channel, Positive

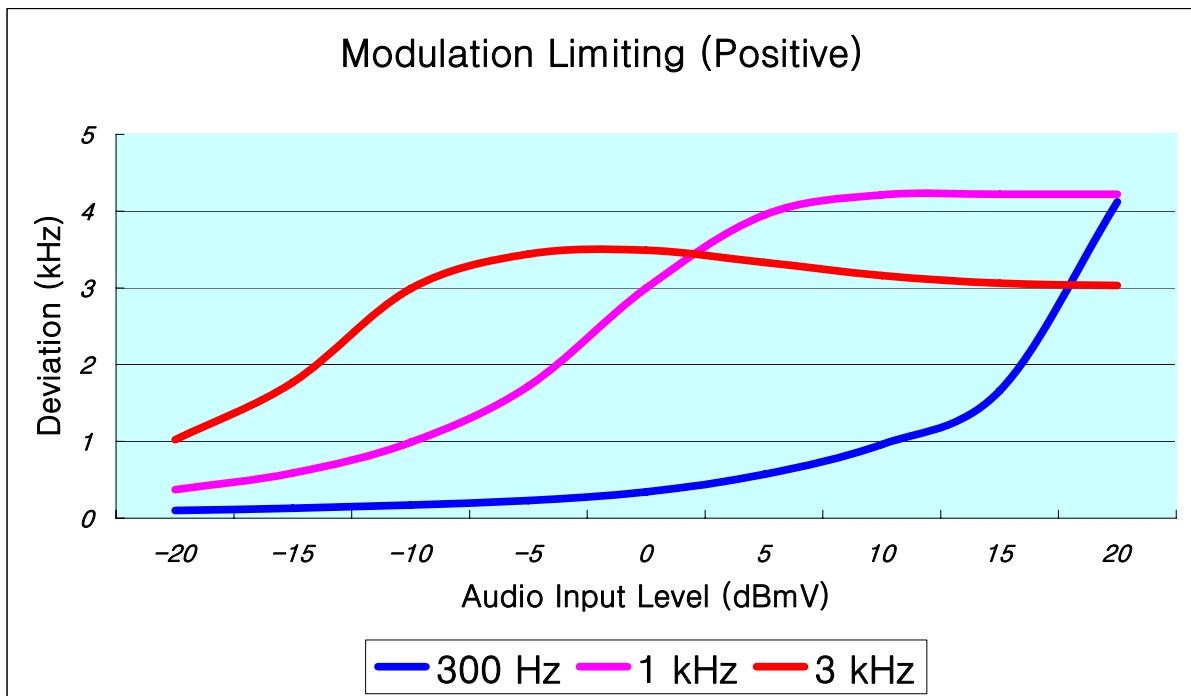

5.5.8.12 WideBand, 3rd Channel, Negative

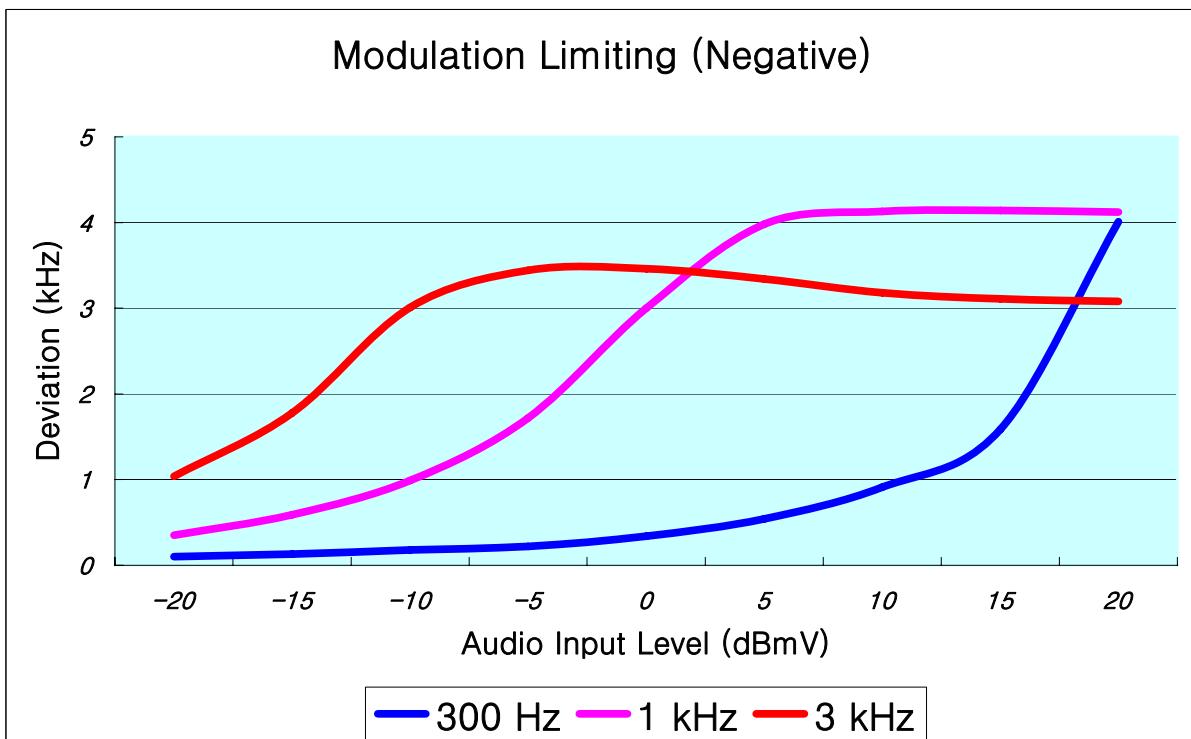

5.6 Occupied Bandwidth

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission. Specified limits according to the emission mask per section 90.210 is as below.

Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
- (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log (P)$ dB.

Emission Mask D. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(f_d / 2.88 \text{ kHz})$ dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.

5.6.1 Specification

FCC Rules Part 2, Section 2.1049
FCC Rules Part 90, Section 90.210
Industry Canada, RSS-119 Section 6.4

5.6.2 Method of Measurement

ANSI/TIA-603-B-2002 Section 2.2.11

5.6.3 Measurement Set-Up

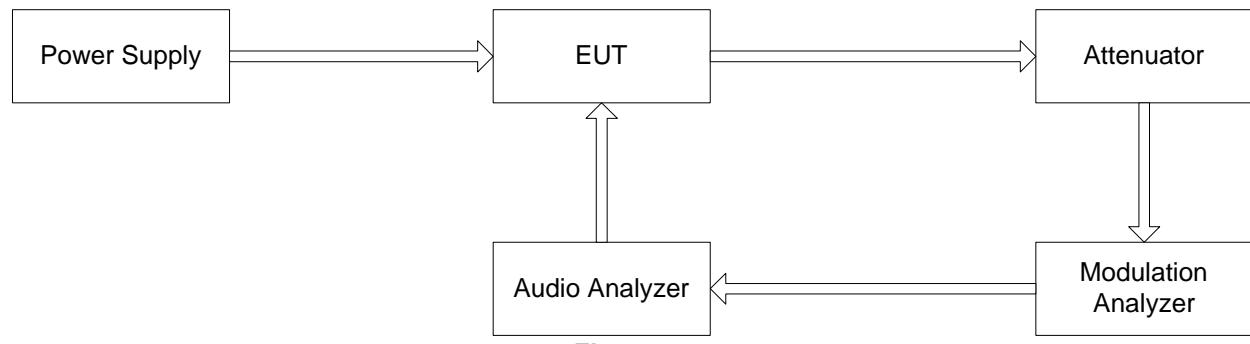


Fig.5

5.6.4 Test Equipment List

Equipment	Model Name	Manufacturer
EUT	SP1102	Maxon CIC Corp.
Power Supply	IPS-30B03DD	INTERACT
Audio Analyzer	8903B	Agilent
Spectrum Analyzer	FSP7	Rohde & Shwarz
Attenuator	33-30-33	WEINSCHEL

5.6.5 Measurement Procedure

- The unit was turn-up in accordance with the alignment procedure stated in the FIG. 5 , and was loaded into a 50 ohm resistive termination.
- The radio transmitter was modulated by a 2500 Hz tone at an input level 16 dB greater than that necessary to produce 50 percent modulation. The input level shall be established at the frequency of maximum response of the audio modulating circuit.
- The occupied bandwidth data is obtained for 25kHz and 12.5 kHz channel bandwidth.


5.6.6 Data

Frequency (MHz)	Channel Spacing	Applicable Emission Mask	99% Bandwidth (kHz)	Maximum Authorized Bandwidth (KHz)
148.025 MHz	Narrow	D	6.6	11.25
	Wide	B	11.3	20.00
161.025 MHz	Narrow	D	6.7	11.25
	Wide	B	11.4	20.00
173.975 MHz	Narrow	D	7.1	11.25
	Wide	B	11.4	20.00

5.6.6 99% Bandwidth

5.6.6.1 Plot 1


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 6.4
Operating Frequency :	148.025 MHz
Channel :	1st Channel
Power Output :	5 Watts
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	99% Bandwidth
Reference Voltage :	7.5 VDC

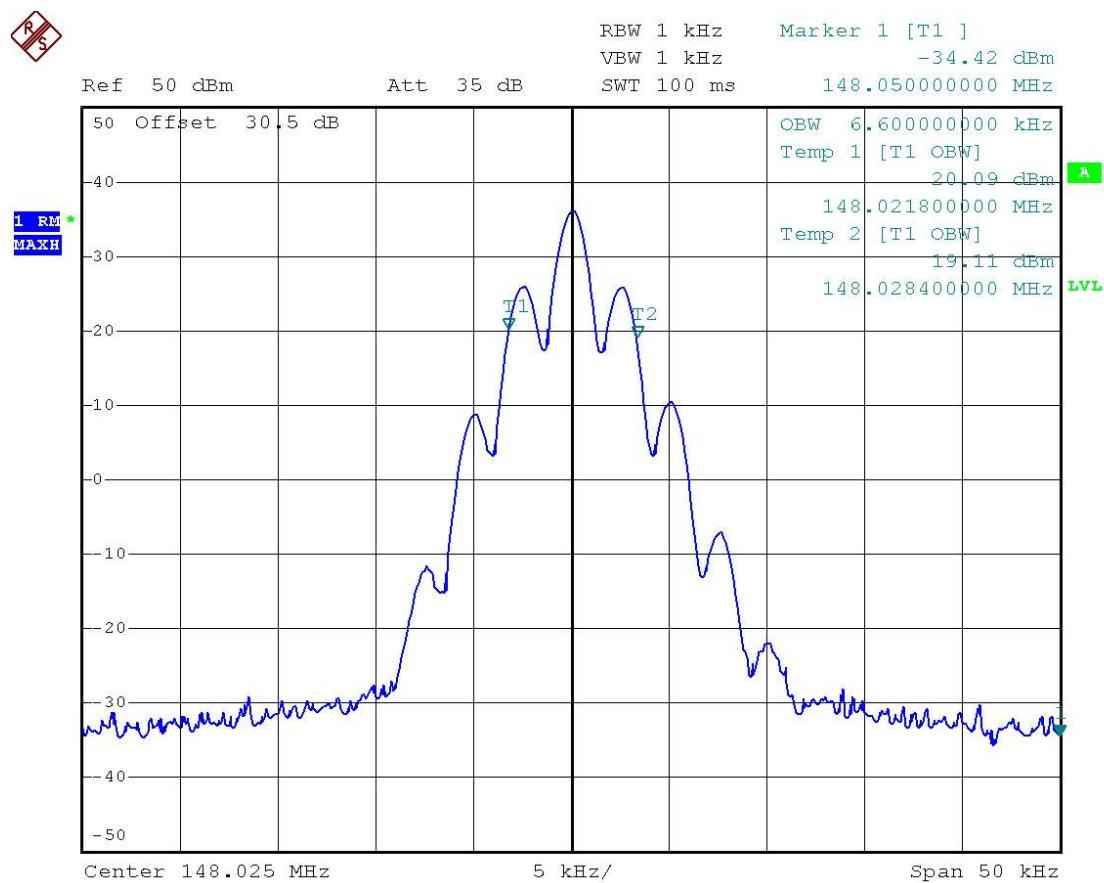

Date: 5.NOV.2008 14:11:12

5.6.6.2 Plot 2


FCC Rules : Part 2 §2.1053(a) & §90.210
 IC Rules : RSS-119 Section 6.4
 Operating Frequency : 148.025 MHz
 Channel : 1st Channel
 Power Output : 5 Watts
 Channel Spacing : WideBand
 Modulation Signal : FM modulation with 2.5kHz sine wave signal
 Emission Mask : 99% Bandwidth
 Reference Voltage : 7.5 VDC

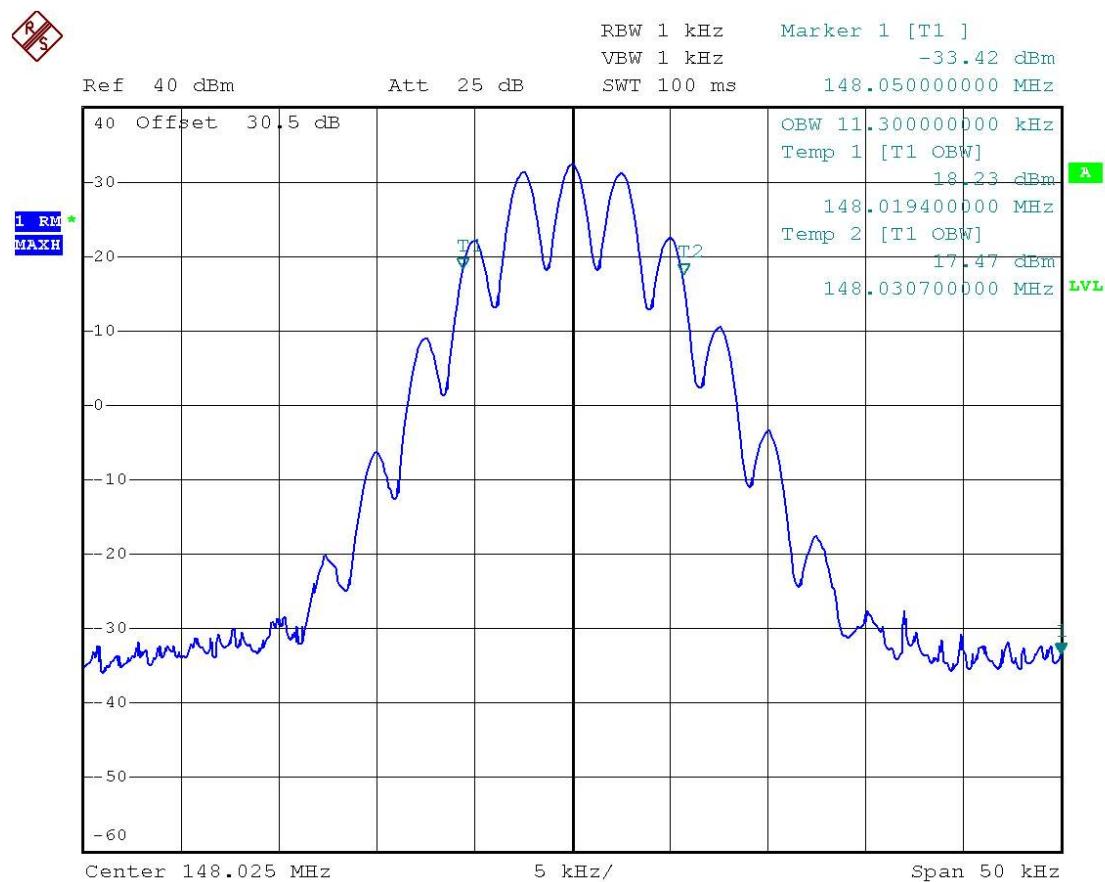

Date: 5.NOV.2008 14:13:47

5.6.6.3 Plot 3


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 6.4
Operating Frequency :	161.025 MHz
Channel :	2nd Channel
Power Output :	5 Watts
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	99% Bandwidth
Reference Voltage :	7.5 VDC

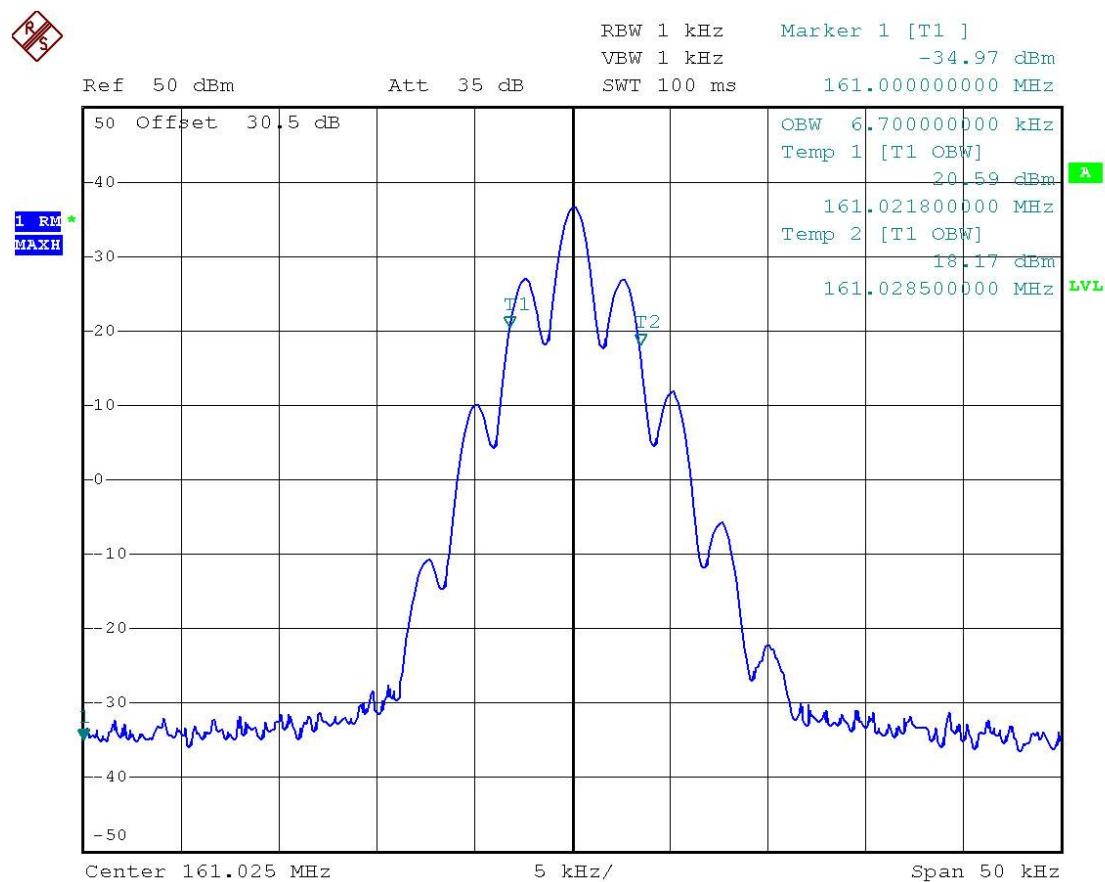

Date: 5.NOV.2008 14:11:52

5.6.6.4 Plot 4


FCC Rules :	<u>Part 2 §2.1053(a) & §90.210</u>
IC Rules :	<u>RSS-119 Section 6.4</u>
Operating Frequency :	<u>161.025 MHz</u>
Channel :	<u>2nd Channel</u>
Power Output :	<u>5 Watts</u>
Channel Spacing :	<u>WideBand</u>
Modulation Signal :	<u>FM modulation with 2.5kHz sine wave signal</u>
Emission Mask :	<u>99% Bandwidth</u>
Reference Voltage :	<u>7.5 VDC</u>

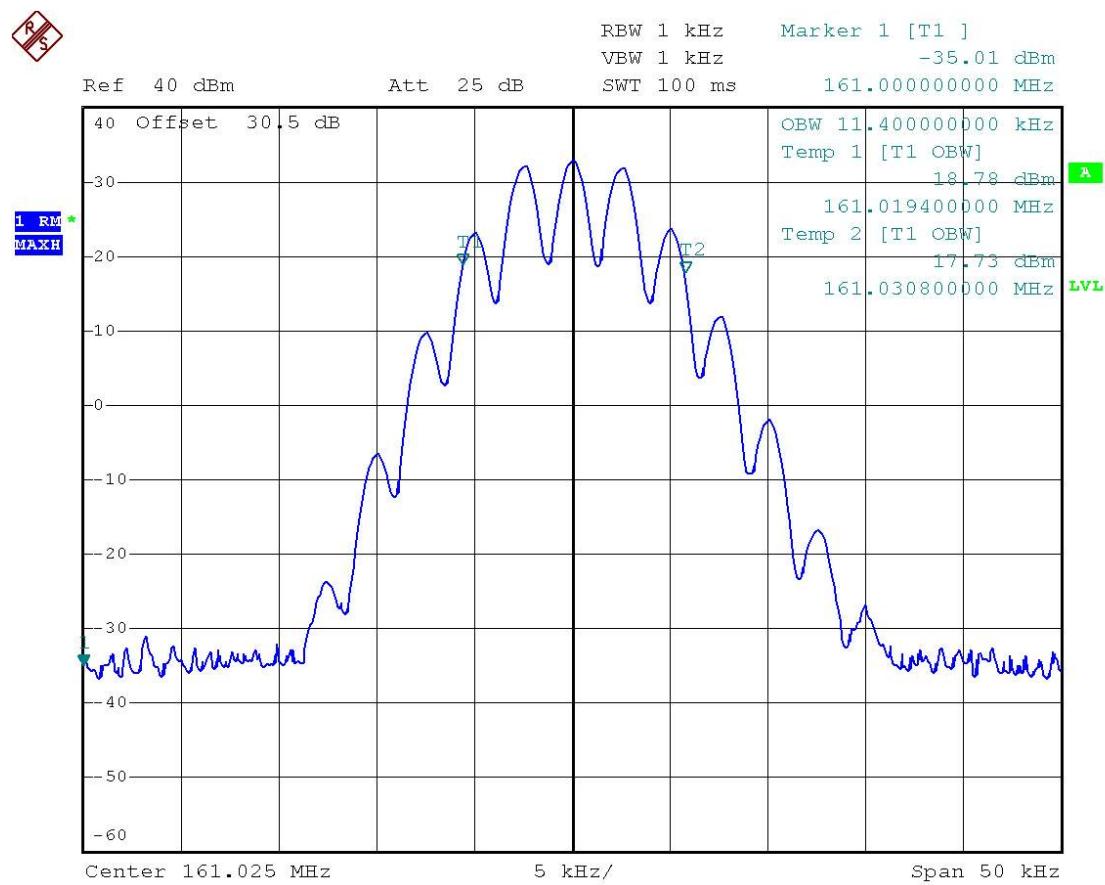

Date: 5.NOV.2008 14:14:15

5.6.6.5 Plot 5


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 6.4
Operating Frequency :	173.975 MHz
Channel :	3rd Channel
Power Output :	5 Watts
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	99% Bandwidth
Reference Voltage :	7.5 VDC

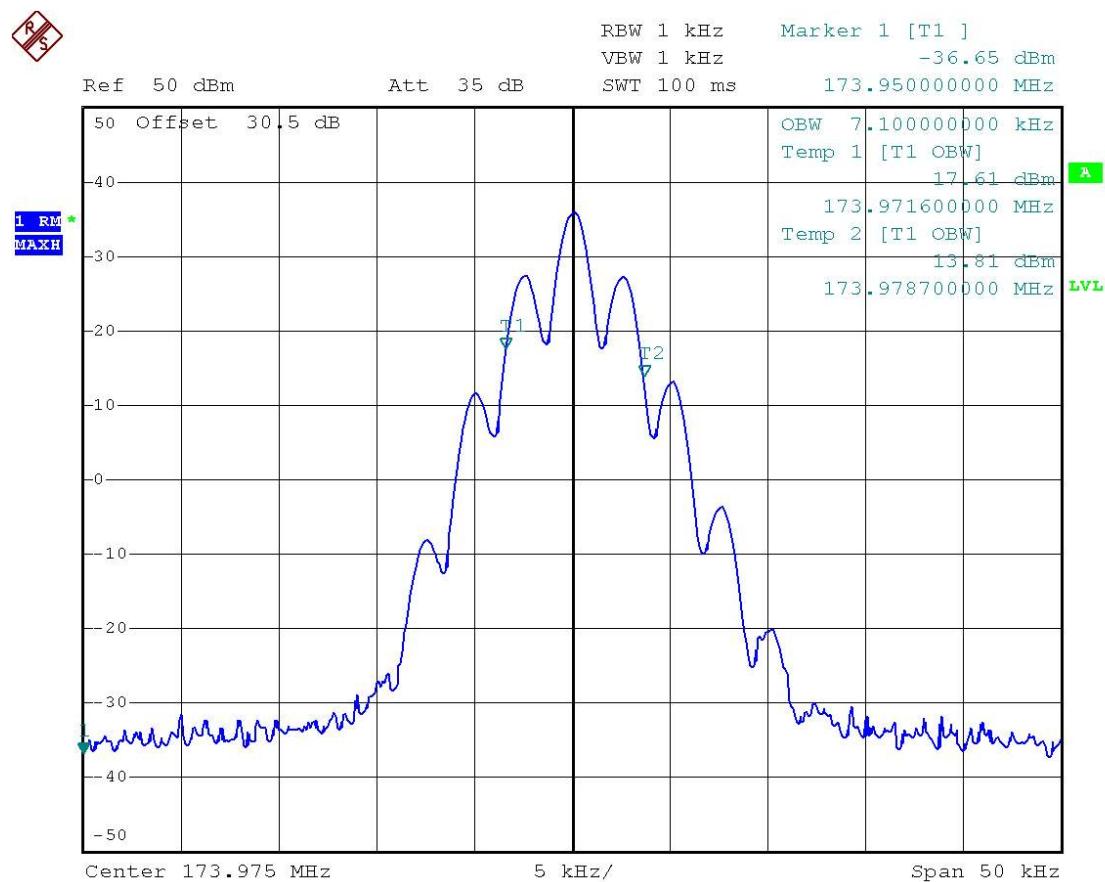

Date: 5.NOV.2008 14:12:31

5.6.6.6 Plot 6

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 6.4
Operating Frequency :	173.975 MHz
Channel :	3rd Channel
Power Output :	5 Watts
Channel Spacing :	WideBand
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	99% Bandwidth
Reference Voltage :	7.5 VDC

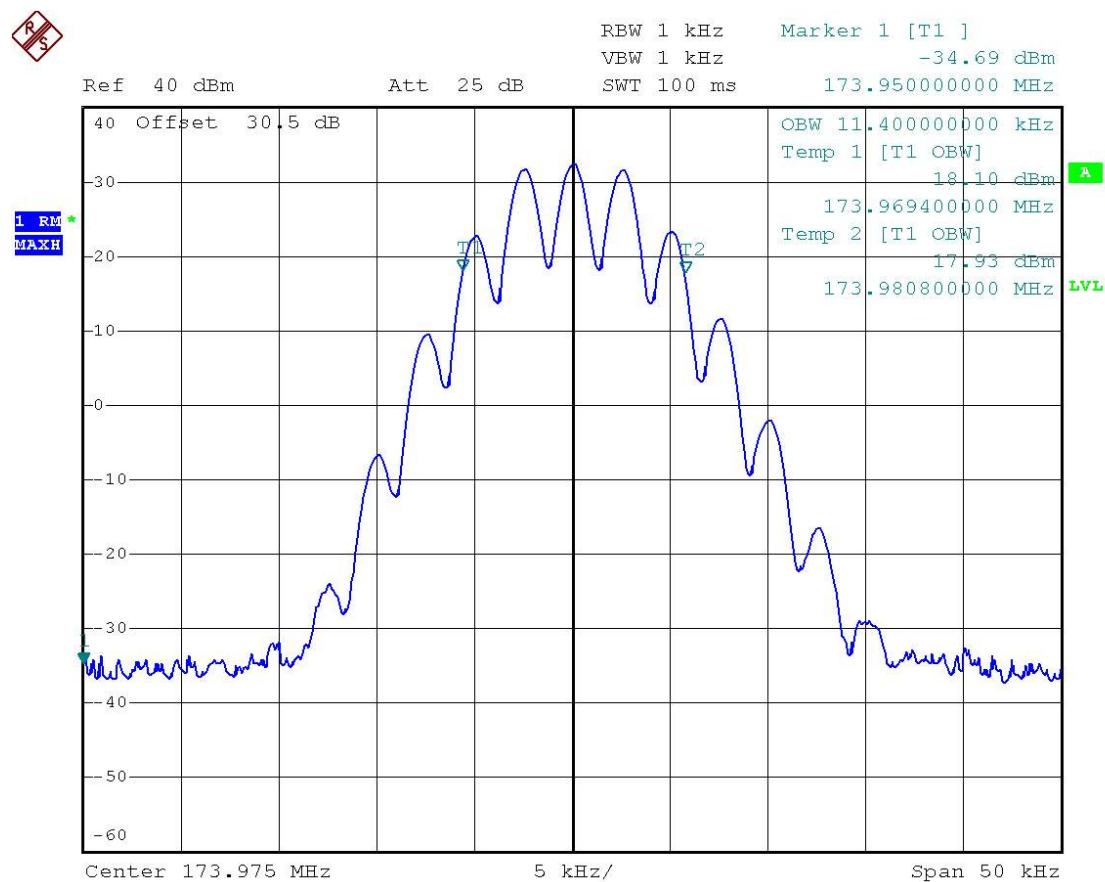


Date: 5.NOV.2008 14:14:44

5.6.7 Emission Mask

5.6.7.1 Plot 1


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 6.4
Operating Frequency :	148.025 MHz
Channel :	1st Channel
Power Output :	5 Watts
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask D
Reference Voltage :	7.5 VDC

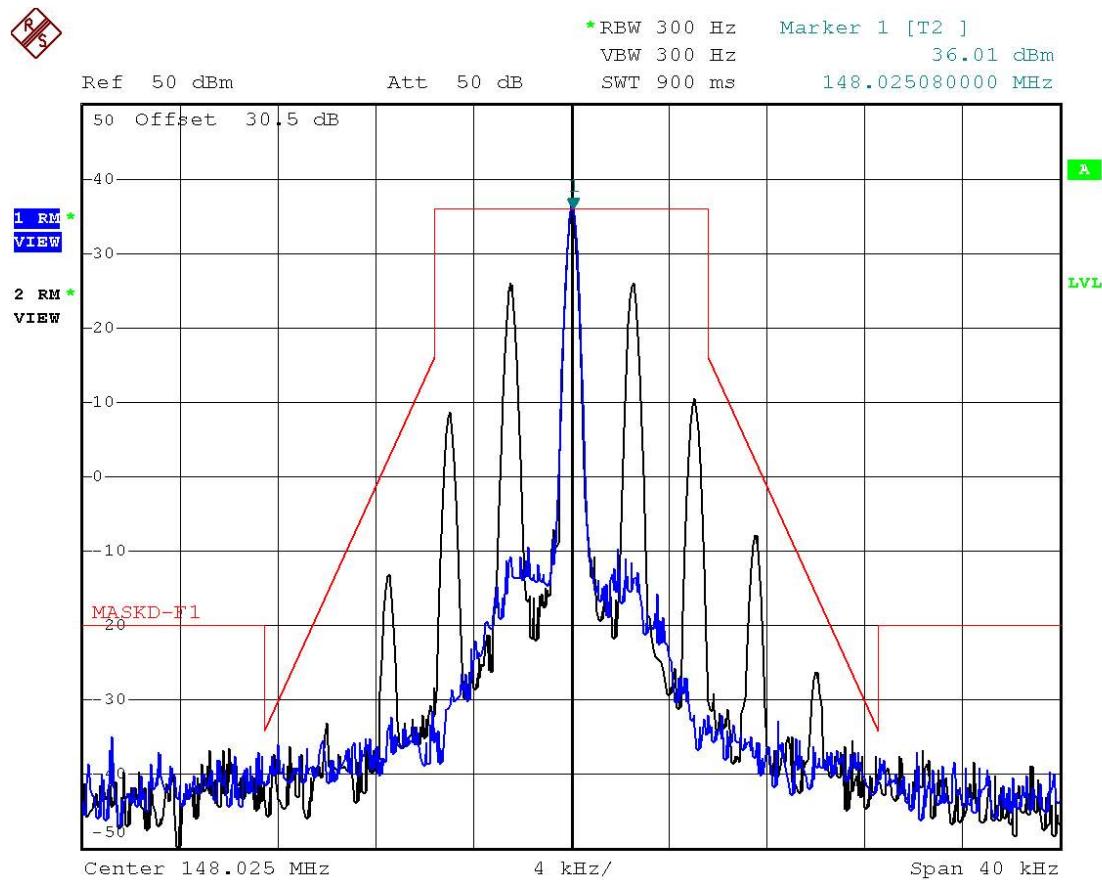

Date: 5.NOV.2008 16:49:27

5.6.7.2 Plot 2


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 6.4
Operating Frequency :	161.025 MHz
Channel :	2 nd Channel
Power Output :	5 Watts
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask D
Reference Voltage :	7.5 VDC

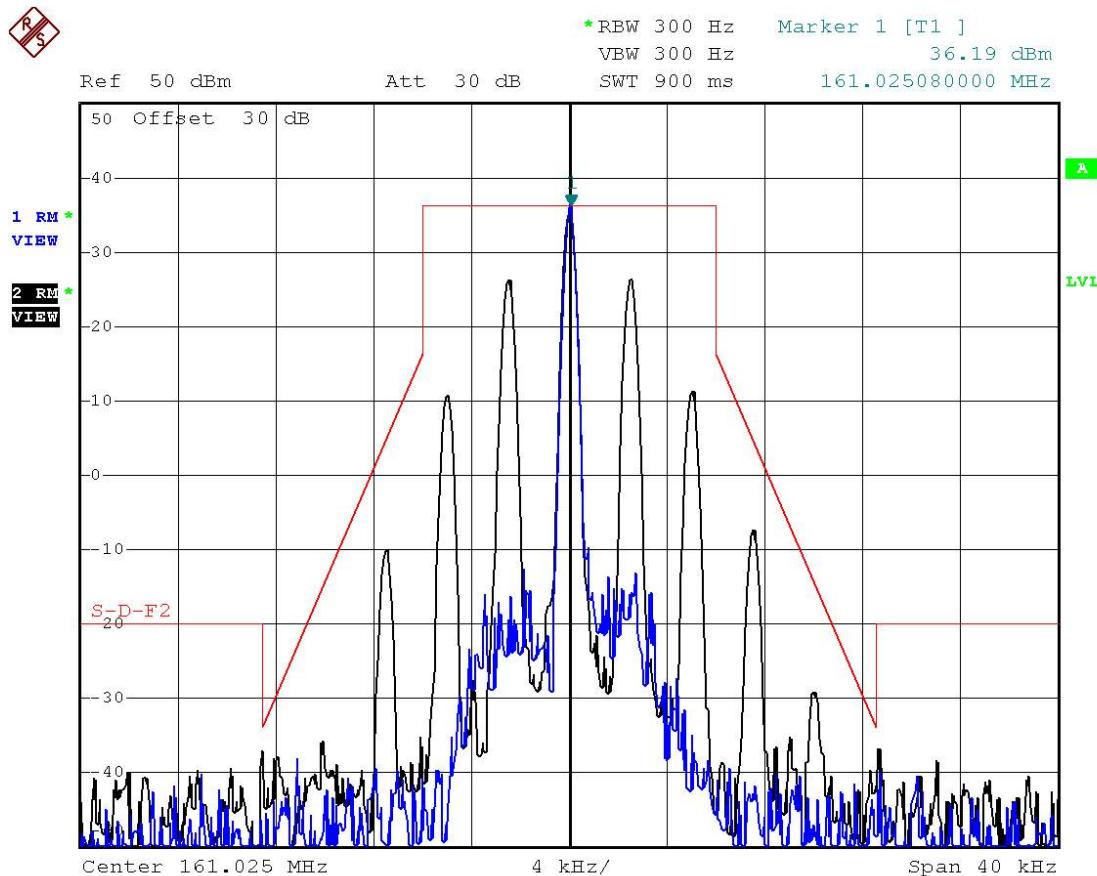

Date: 28.NOV.2008 14:26:26

5.6.7.3 Plot 3


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 6.4
Operating Frequency :	173.975 MHz
Channel :	3 rd Channel
Power Output :	5 Watts
Channel Spacing :	WideBand
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask D
Reference Voltage :	7.5 VDC

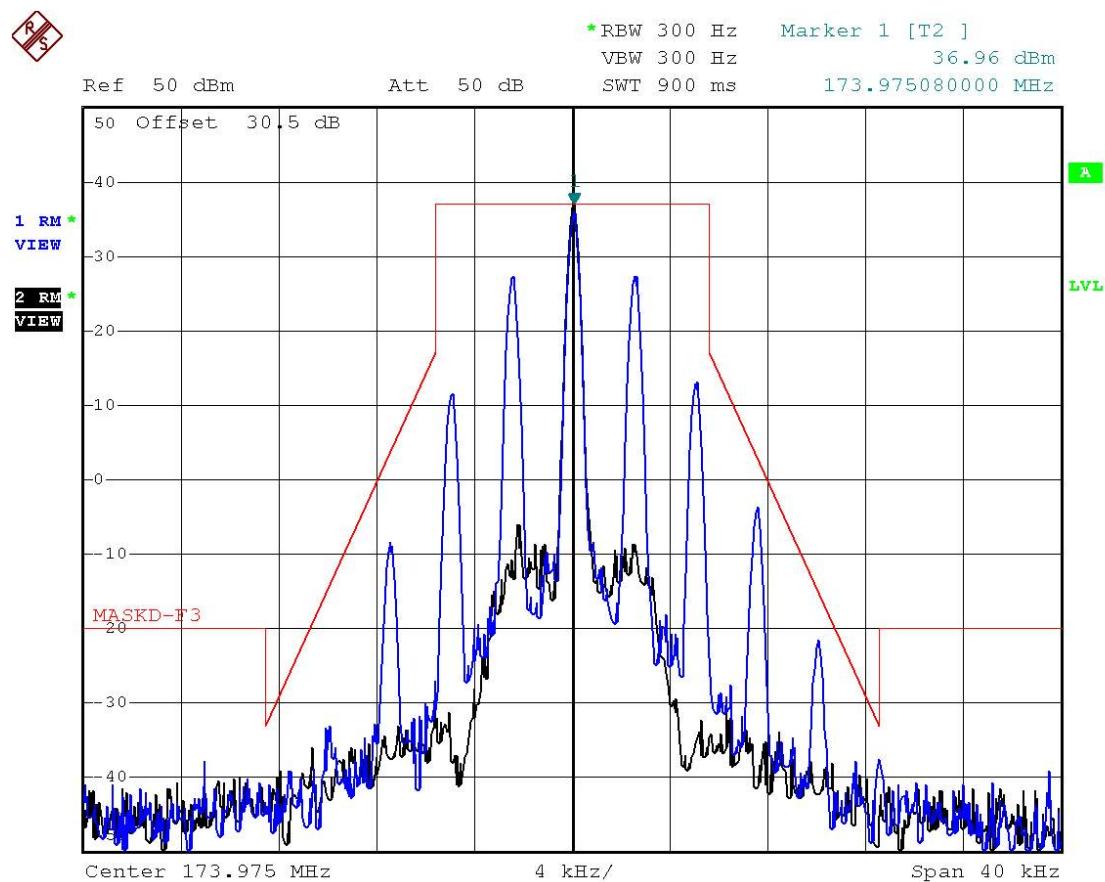

Date: 5.NOV.2008 17:31:56

5.6.7.4 Plot 4


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Section 6.4
Operating Frequency :	148.025 MHz
Channel :	1st Channel
Power Output :	5 Watts
Channel Spacing :	WideBand
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask B
Reference Voltage :	7.5 VDC

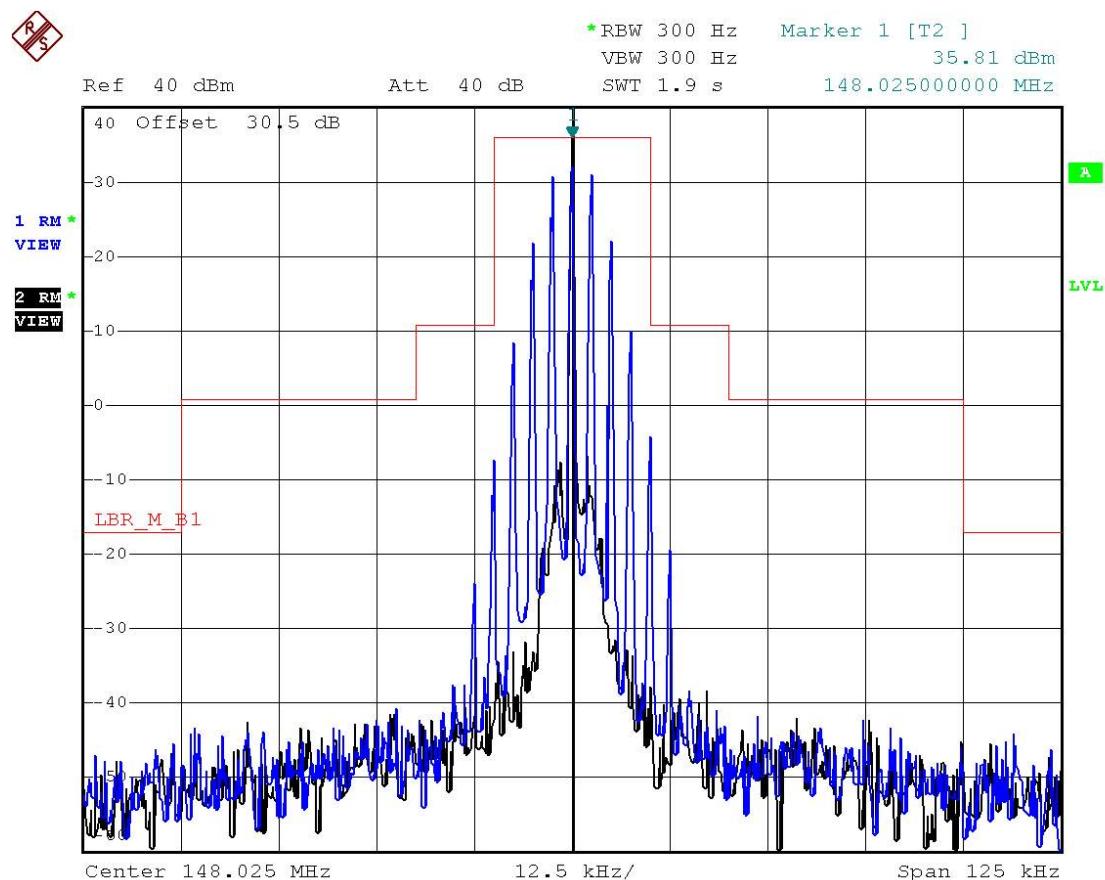

Date: 5.NOV.2008 16:16:59

5.6.7.5 Plot 5


FCC Rules : Part 2 §2.1053(a) & §90.210
 IC Rules : RSS-119 Section 6.4
 Operating Frequency : 161.025 MHz
 Channel : 2nd Channel
 Power Output : 5 Watts
 Channel Spacing : WideBand
 Modulation Signal : FM modulation with 2.5kHz sine wave signal
 Emission Mask : Mask B
 Reference Voltage : 7.5 VDC

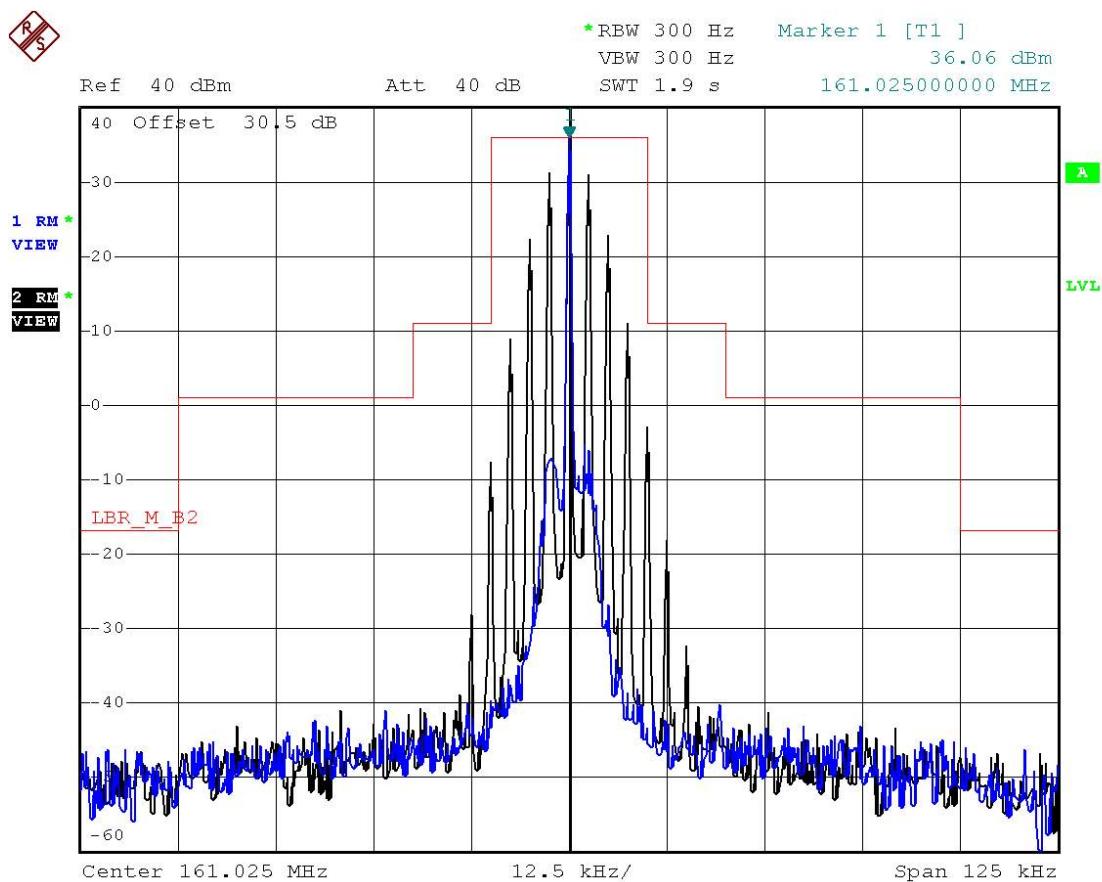

Date: 5.NOV.2008 16:26:58

5.6.7.6 Plot 6

FCC Rules : Part 2 §2.1053(a) & §90.210
 IC Rules : RSS-119 Section 6.4
 Operating Frequency : 173.975 MHz
 Channel : 3rd Channel
 Power Output : 1 Watt
 Channel Spacing : WideBand
 Modulation Signal : FM modulation with 2.5kHz sine wave signal
 Emission Mask : Mask B
 Reference Voltage : 7.5 VDC

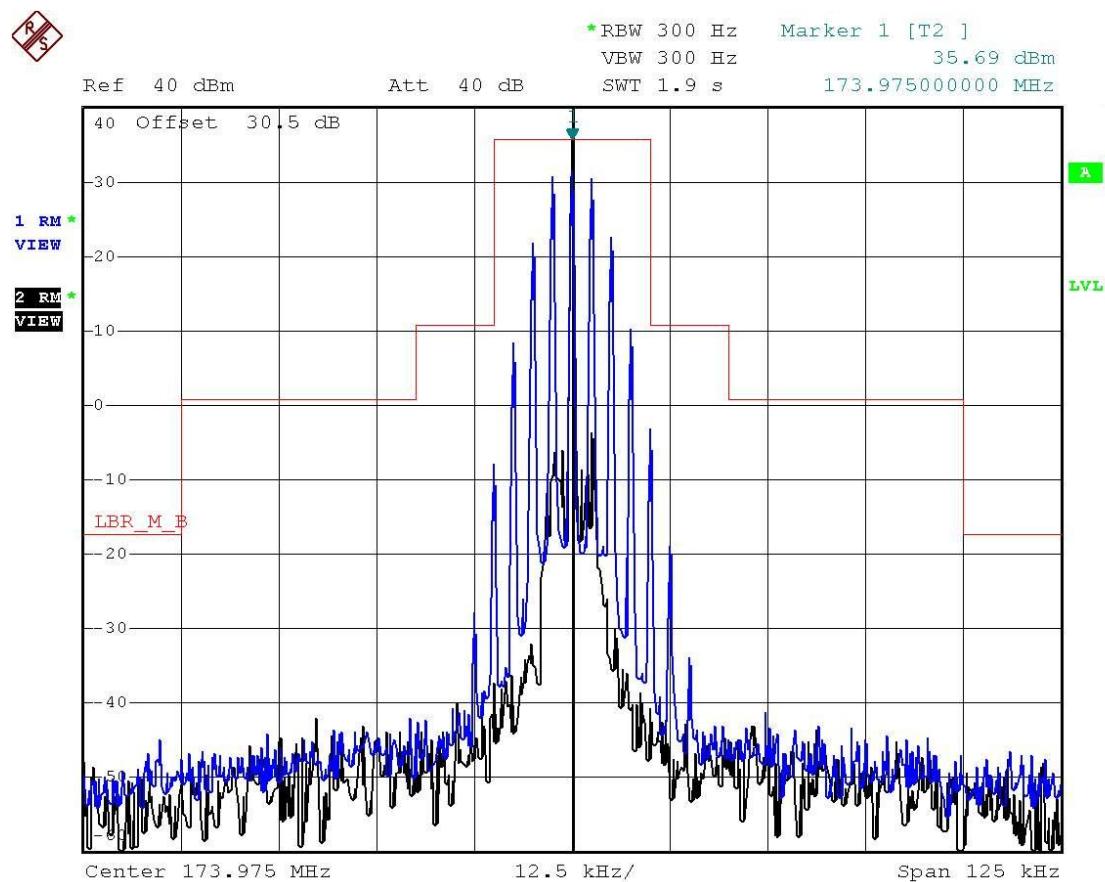

Date: 5.NOV.2008 15:59:20

5.7 Spurious Emissions at Antenna Terminals

Conducted spurious emissions are emissions at the antenna terminals on a frequency or frequencies which are outside of band sufficient to ensure transmission or information of required quality for the class of communication desired.

5.7.1 Specification

FCC Rules Part 2, Section 2.1051
FCC Rules Part 90, Section 90.210
Industry Canada, RSS-119 Section 6.3

5.7.2 Method of Measurement

ANSI/TIA-603-B-2002 Section 2.2.13

5.7.3 Measurement Set-Up

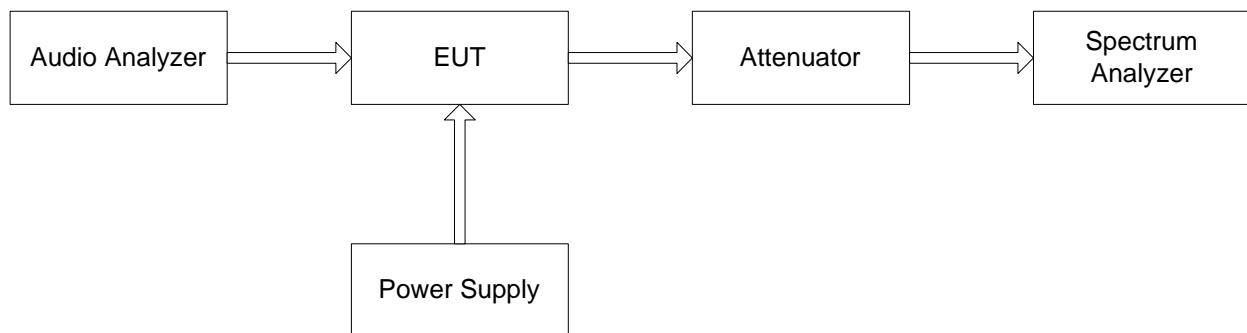


Fig.6

5.7.4 Test Equipment List

Equipment	Model Name	Manufacturer
EUT	SP1102	Maxon CIC Corp.
Power Supply	IPS-30B03DD	INTERACT
Audio Analyzer	8903B	Agilent
Spectrum Analyzer	FSP7	Rohde & Schwarz
Attenuator	33-30-33	WEINSCHEL

5.7.5 Measurement Procedure

- The unit was turned-up in accordance with the alignment procedure stated in the FIG. 6, and was loaded into a 50 ohm resistive termination.
- The antenna output terminal of the EUT was connected to the input of a 50 ohm spectrum analyzer through a matched 10 dB attenuator and notch filter.
- Transmitter was set to the maximum power output condition.
- The unit was modulated with a 2.5 kHz audio tone at an input level 16dB greater than that required 50% modulation. The spectrum was scanned from the lowest frequency generated in the equipment to the 10th harmonic of the carrier.
- The limit was applied according the $50 + 10\log_{10}(P)$: mean power in Watts) dB.

5.7.5 Data


Test Mode (TX/RX)		Spurious Emissions			
		Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)
148.025MHz	TX	295.78	-44.53	-20	24.53
		443.22	-48.33		28.33
	RX	-	-	-57	-
161.025MHz	TX	321.00	-39.79	-20	19.79
	RX	-	-	-57	-
173.975MHz	TX	348.16	-38.65	-20	18.65
	RX	-	-	-57	-

5.7.6 Plots

5.7.6.1 1st Channel


FCC Rules :	Part 2 §2.1051 & §90.210
IC Rules :	RSS-119 Section 6.3
Operating Frequency :	148.025 MHz
Channel :	1st Channel
Power Output :	5 Watts
Channel Spacing :	WideBand
Reference Voltage :	7.5 VDC
Limit :	$50 + 10\log_{10}P$ (-20dBm)

5.7.6.1.1 30 MHz ~ 1 GHz

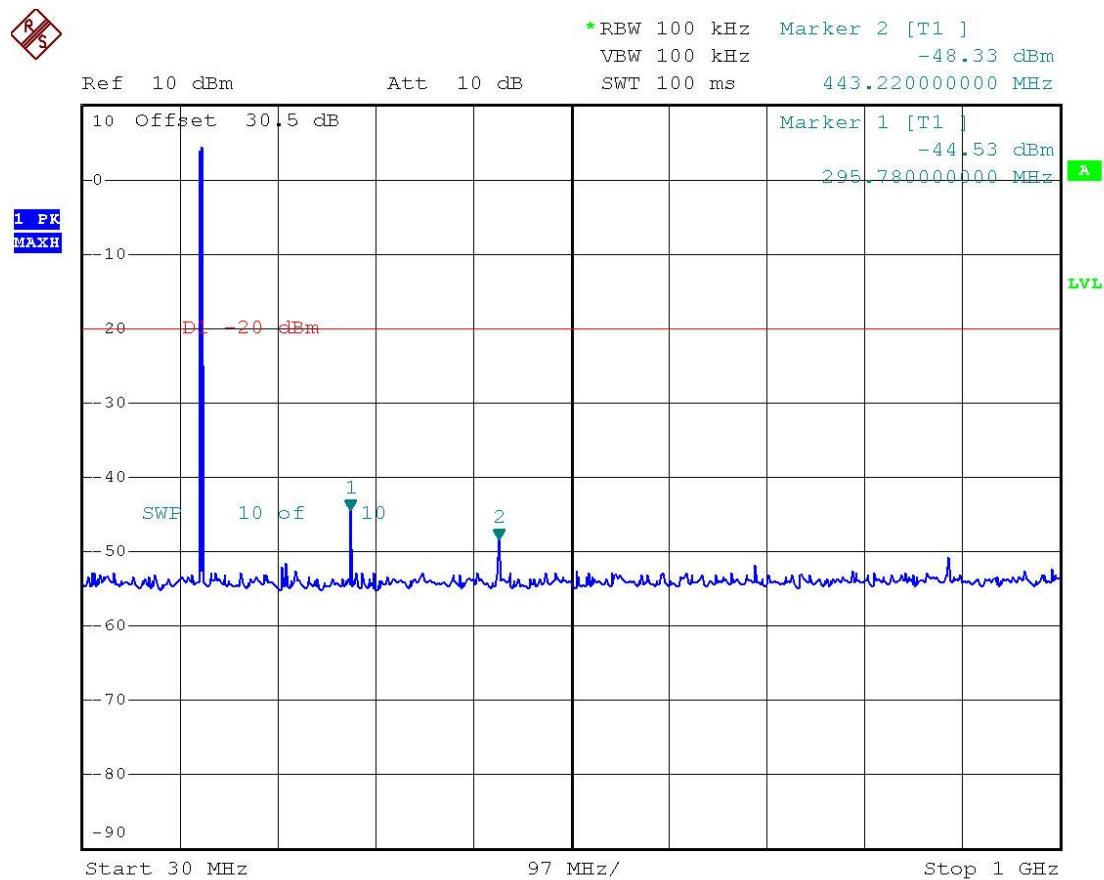

Date: 31.OCT.2008 19:45:58

5.7.6.1.2 1 GHz ~ 2 GHz

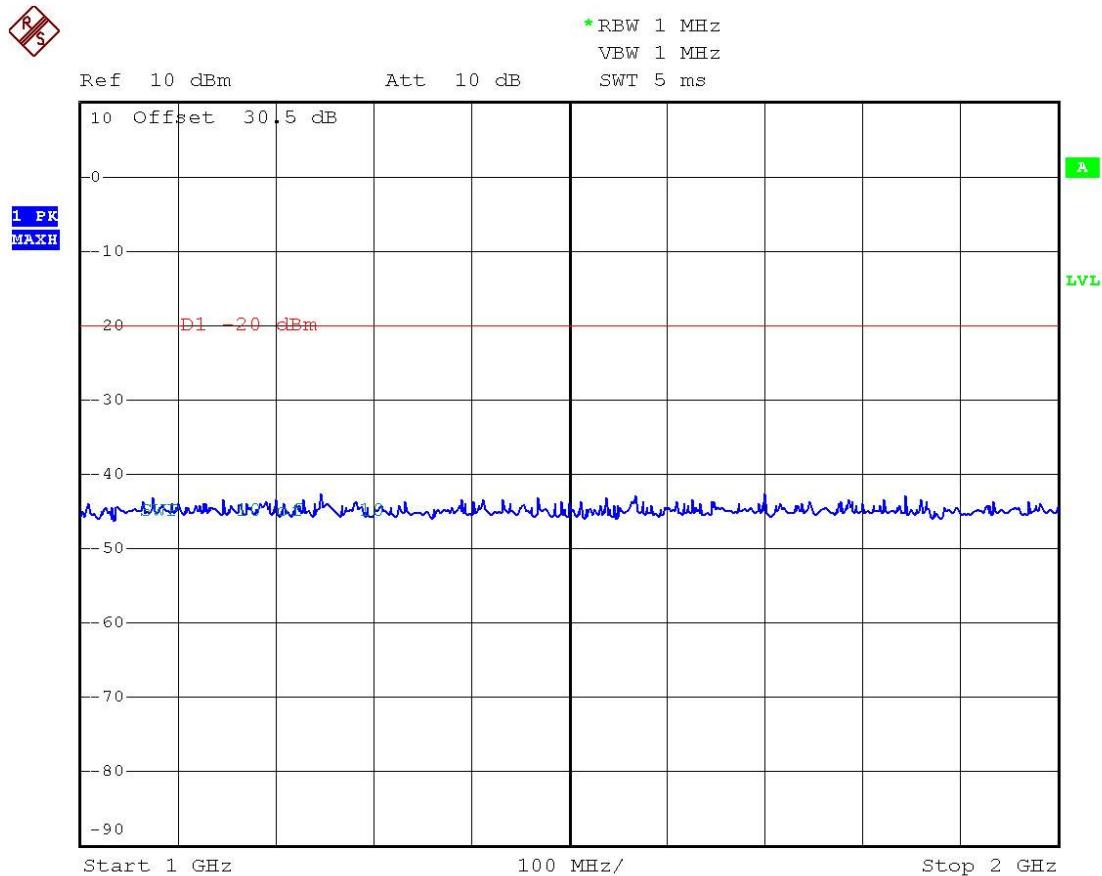


Date: 31.OCT.2008 19:46:26

5.7.6.2 2nd Channel


FCC Rules :	Part 2 §2.1051 & §90.210
IC Rules :	RSS-119 Section 6.3
Operating Frequency :	161.025 MHz
Channel :	2nd Channel
Power Output :	5 Watts
Channel Spacing :	WideBand
Reference Voltage :	7.5 VDC
Limit :	$50 + 10\log_{10}P$ (-20dBm)

5.7.6.2.1 30 MHz ~ 1 GHz

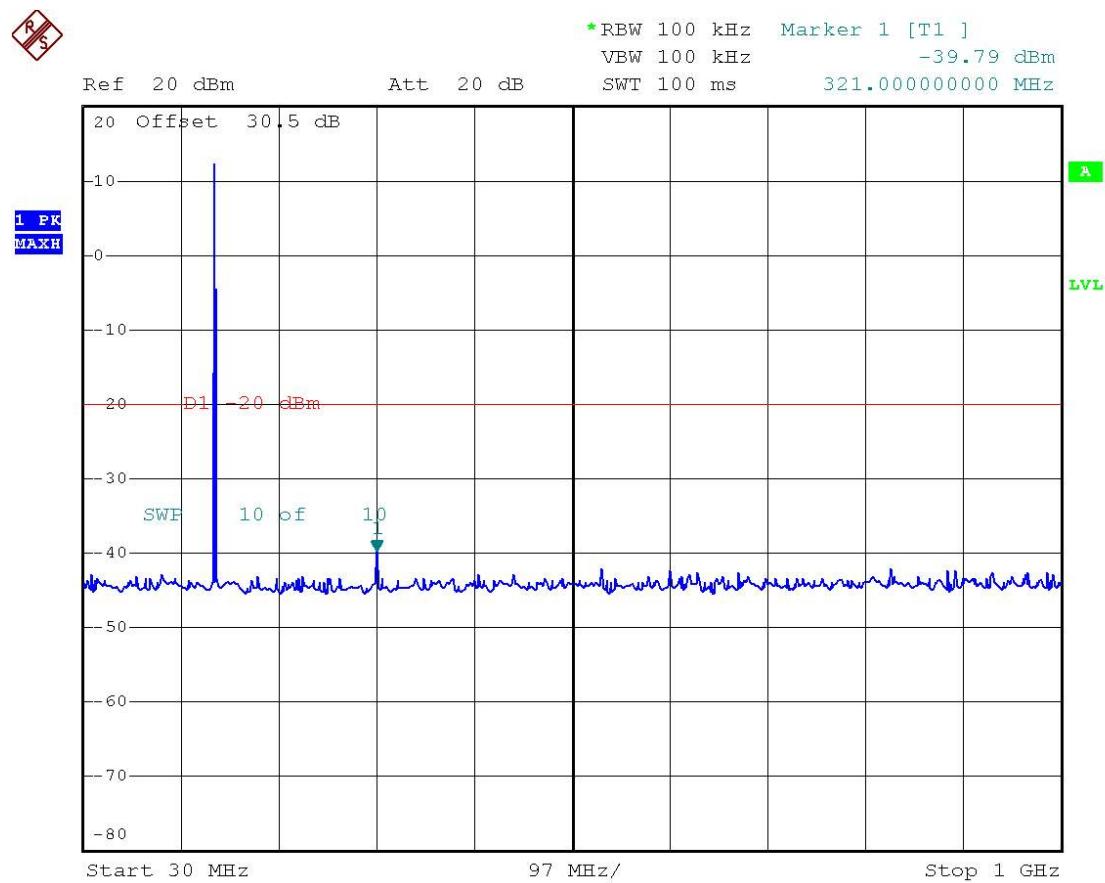

Date: 31.OCT.2008 19:44:52

5.7.6.2.2 1 GHz ~ 2 GHz

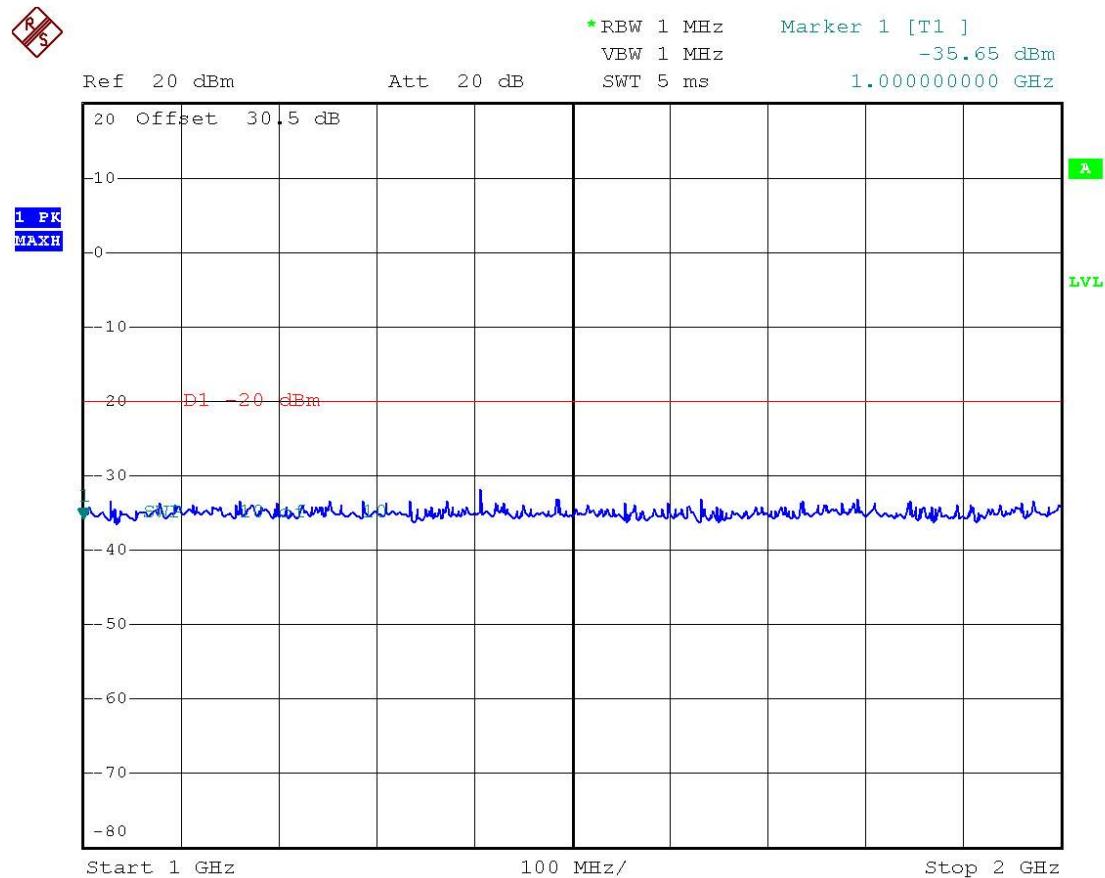


Date: 31.OCT.2008 19:44:24

5.7.6.3 3rd Channel


FCC Rules :	Part 2 §2.1051 & §90.210
IC Rules :	RSS-119 Section 6.3
Operating Frequency :	173.975 MHz
Channel :	3rd Channel
Power Output :	5 Watts
Channel Spacing :	WideBand
Reference Voltage :	7.5 VDC
Limit :	$50 + 10\log_{10}P$ (-20dBm)

5.7.6.3.1 30 MHz ~ 1 GHz

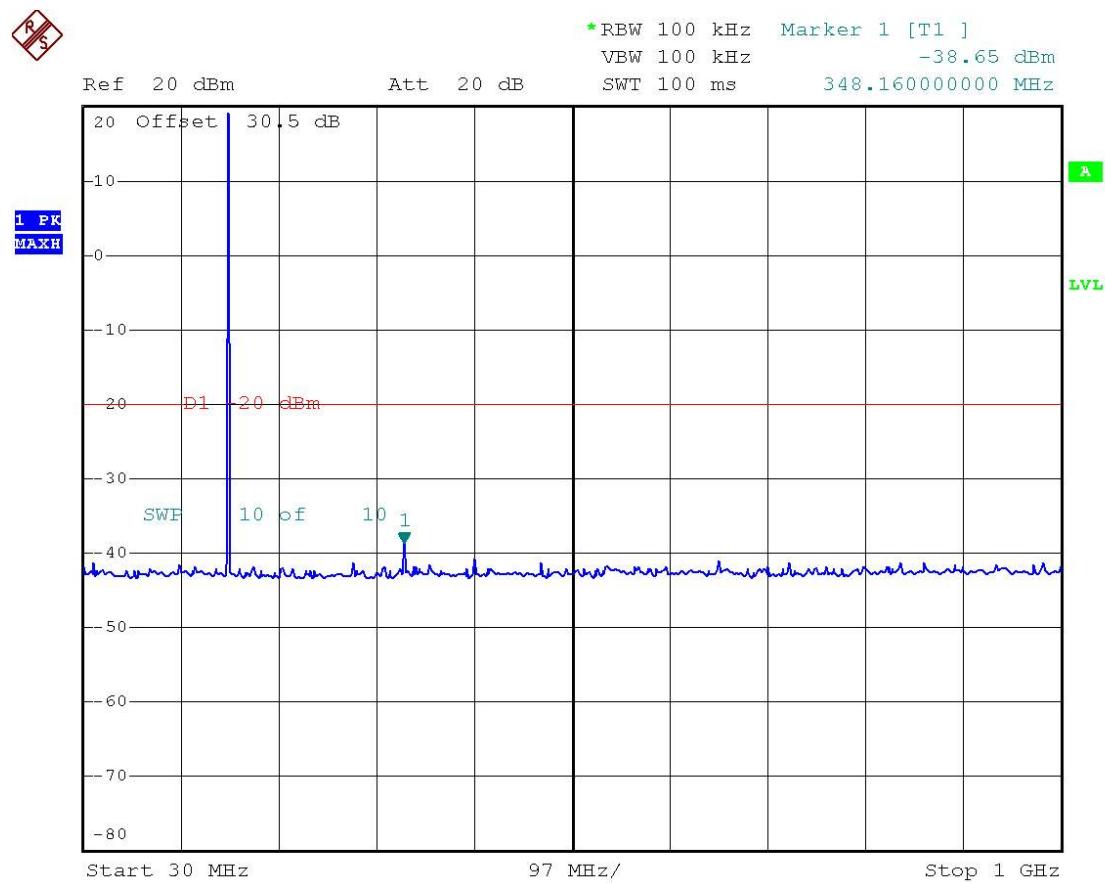

Date: 31.OCT.2008 19:41:28

5.7.6.3.2 1 GHz ~ 2 GHz

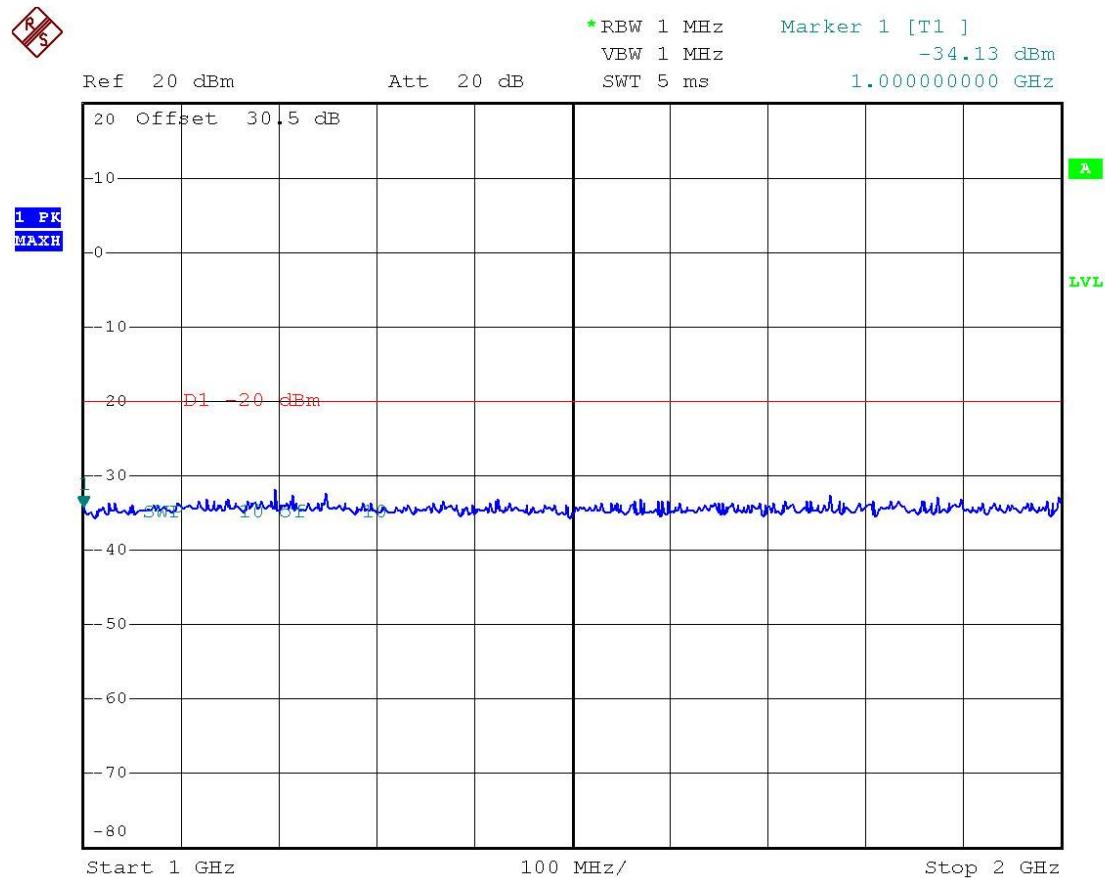


Date: 31.OCT.2008 19:42:20

5.7.6.4 1st Channel


FCC Rules :	Part 2 §2.1051 & §90.210
IC Rules :	RSS-119 Section 6.3
Operating Frequency :	148.025 MHz
Channel :	1st Channel
Power Output :	Stand-By
Channel Spacing :	WideBand
Reference Voltage :	7.5 VDC
Limit :	$50 + 10\log_{10}P$ (-20dBm)

5.7.6.4.1 30 MHz ~ 1 GHz

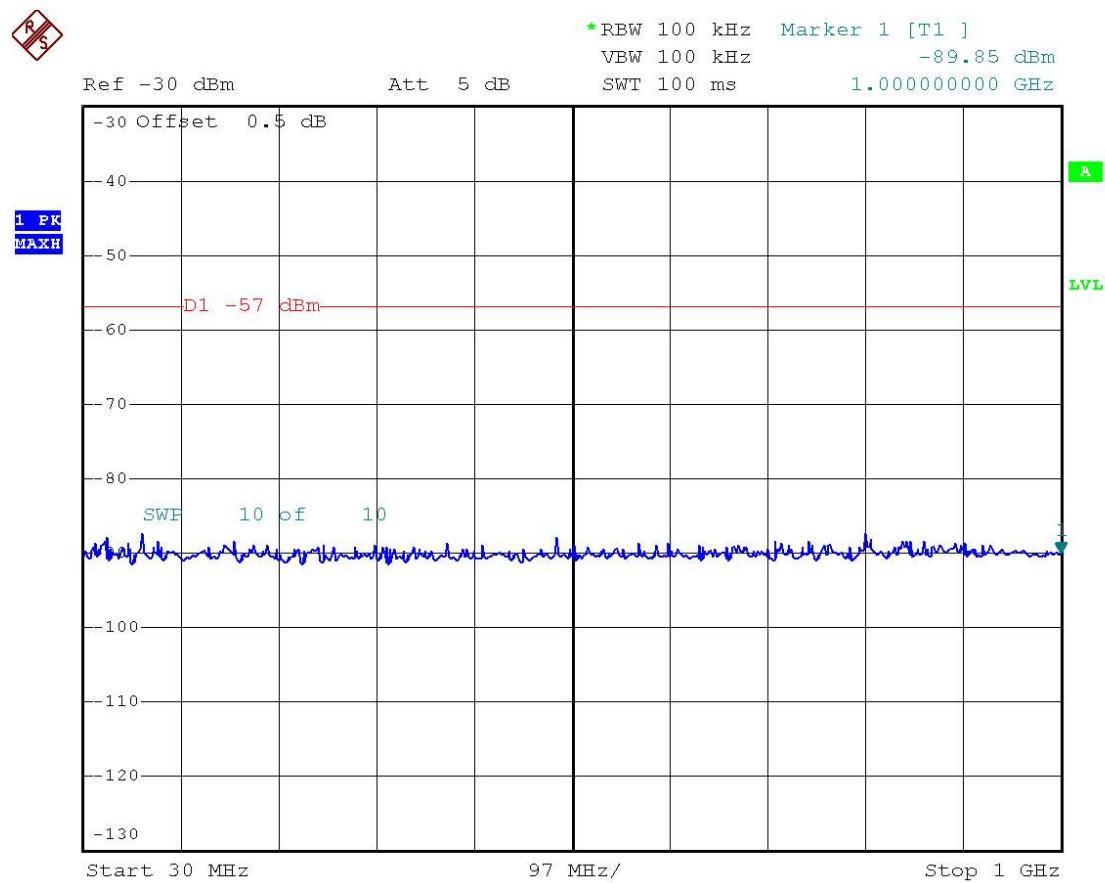

Date: 31.OCT.2008 19:57:29

5.7.6.4.2 1 GHz ~ 2 GHz

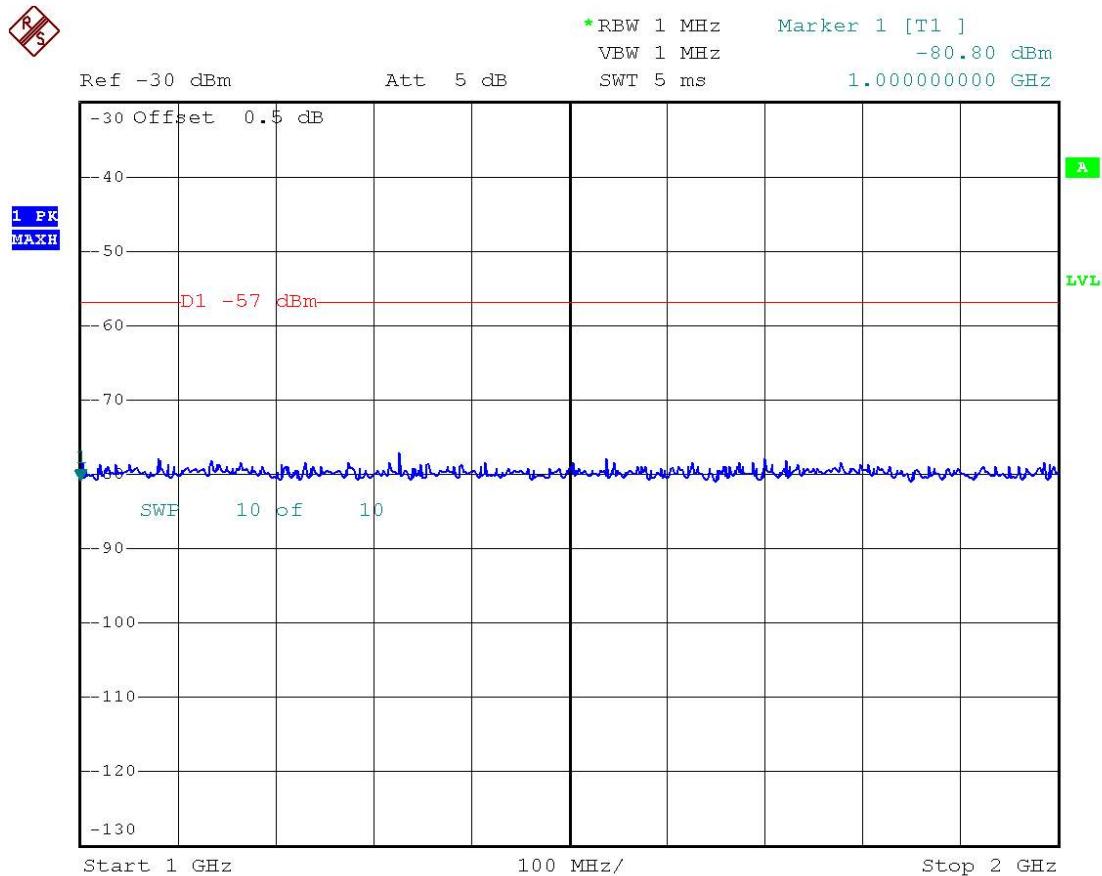


Date: 31.OCT.2008 19:57:09

5.7.6.5 2nd Channel


FCC Rules :	Part 2 §2.1051 & §90.210
IC Rules :	RSS-119 Section 6.3
Operating Frequency :	161.025 MHz
Channel :	2nd Channel
Power Output :	Stand-By
Channel Spacing :	WideBand
Reference Voltage :	7.5 VDC
Limit :	$50 + 10\log_{10}P$ (-20dBm)

5.7.6.5.1 30 MHz ~ 1 GHz

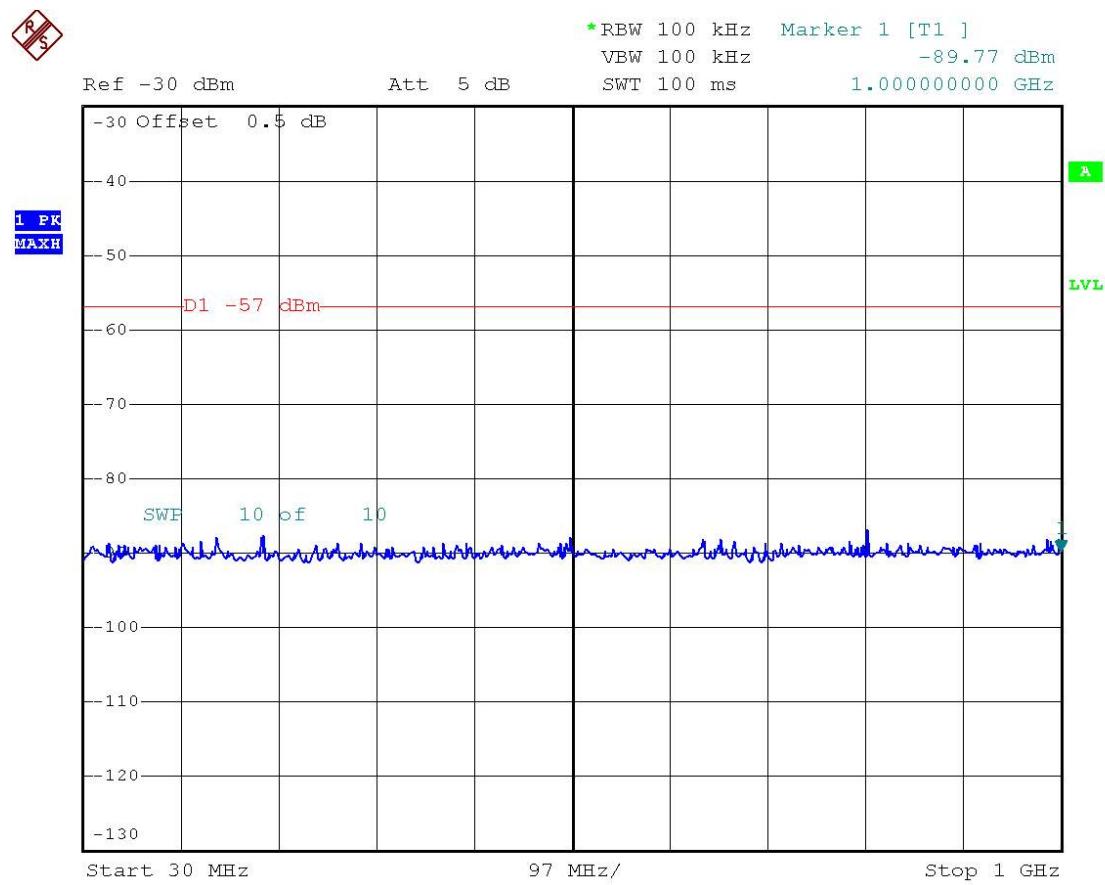

Date: 31.OCT.2008 19:56:14

5.7.6.5.2 1 GHz ~ 2 GHz

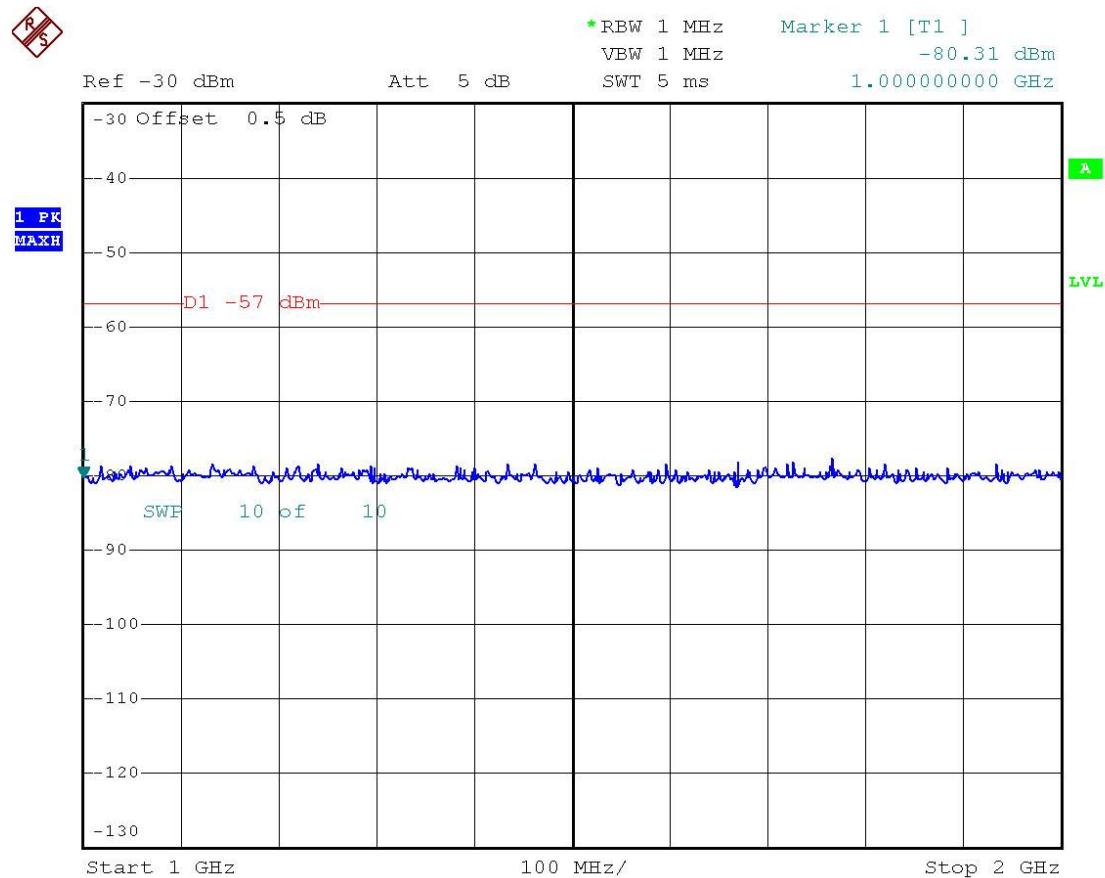


Date: 31.OCT.2008 19:56:33

5.7.6.6 3rd Channel


FCC Rules :	Part 2 §2.1051 & §90.210
IC Rules :	RSS-119 Section 6.3
Operating Frequency :	173.975 MHz
Channel :	3rd Channel
Power Output :	Stand-By
Channel Spacing :	WideBand
Reference Voltage :	7.5 VDC
Limit :	$50 + 10\log_{10}P$ (-20dBm)

5.7.6.6.1 30 MHz ~ 1 GHz

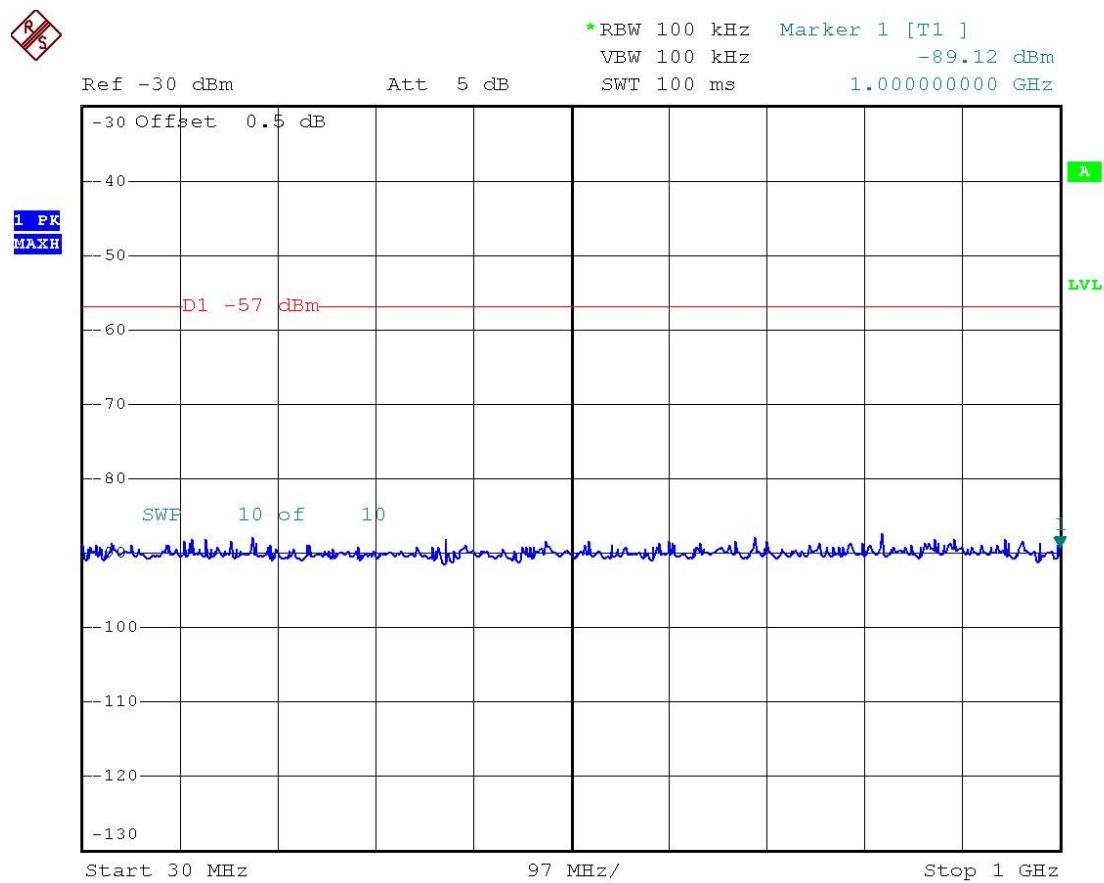

Date: 31.OCT.2008 19:55:45

5.7.6.6.2 1 GHz ~ 2 GHz

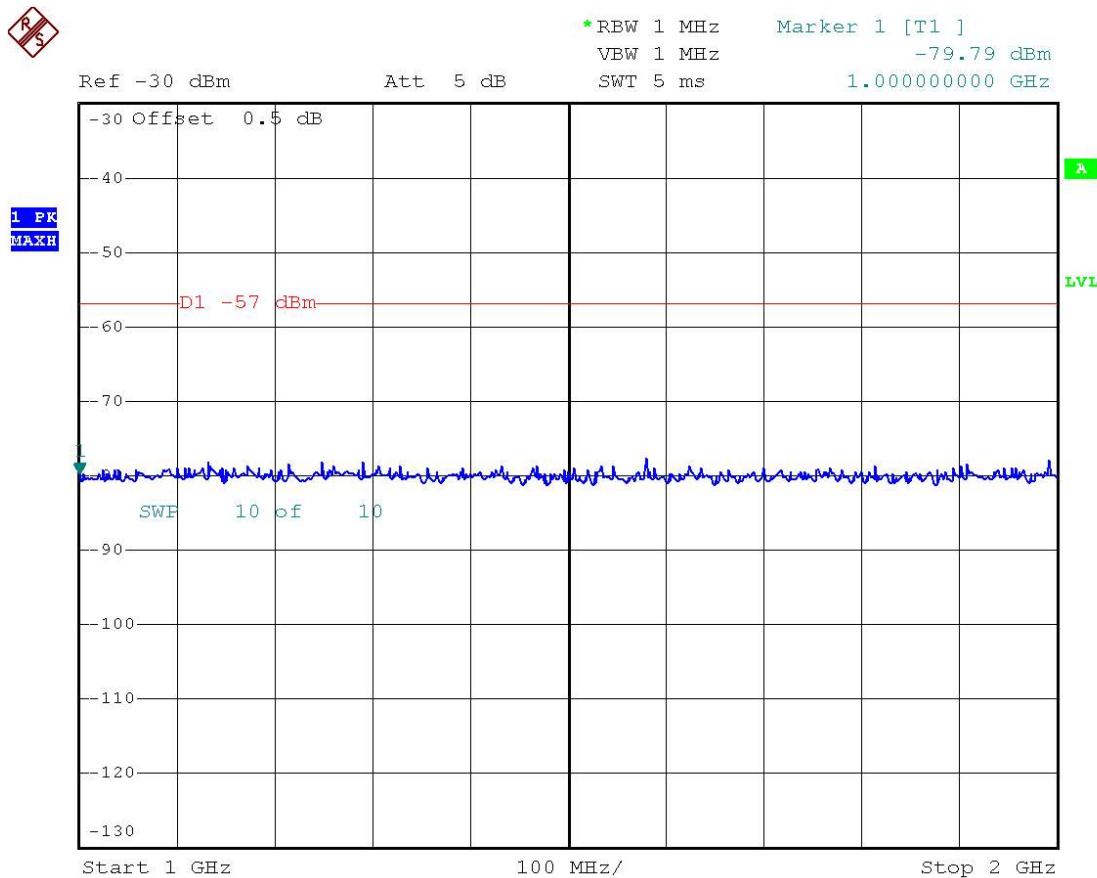

Date: 31.OCT.2008 19:55:22

5.8 Field Strength of Spurious Radiation

Radiated spurious emissions are emissions from the equipment when transmitting load on frequency or frequencies which are outside of band sufficient to ensure transmission or information of required quality for the class of communication desired.

5.8.1 Specification

FCC Rules Part 2, Section 2.1053(a)
FCC Rules Part 90, Section 90.210
Industry Canada, RSS-119 Section 6.3

5.8.2 Method of Measurement

ANSI/TIA-603-B-2002 Section 2.2.12

5.8.3 Measurement Set-Up

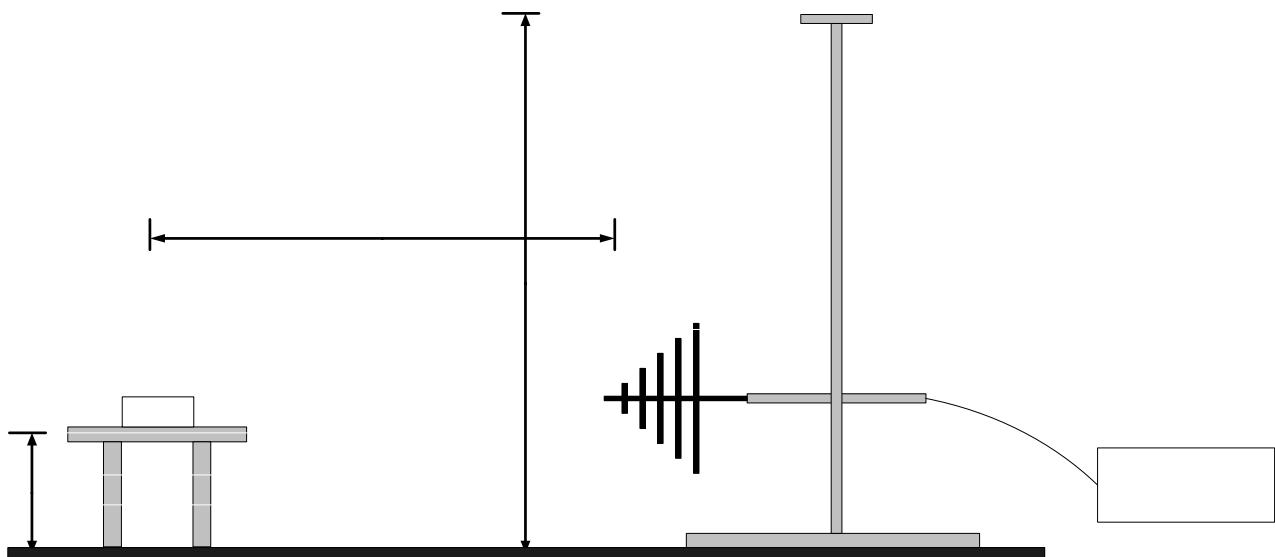


Fig.7

5.8.4 Test Equipment List

Equipment	Model Name	Manufacturer
EUT	SP1102	Maxon CIC Corp.
Power Supply	IPS-30B03DD	INTERACT
Audio Analyzer	8903B	Agilent
Spectrum Analyzer	E7403A	Agilent
Bilog Antenna	VULB9160	SWALZBECK
Horn Antenna	BBHA 9120 D	SWALZBECK

5.8.5 Test Data

FCC Rules :	Part 2 §2.1053(a) & §90.210	
IC Rules :	RSS-119 Section 6.3	
Power Output :	5 Watts	
Reference Voltage :	7.5 VDC	
Channel Spacing :	WideBand	
Limit :	$50 + 10\log_{10}P$ (-20dBm)	

Frequency [MHz]	Spectrum Reading [dBuV/m]	Ant. Pol. [H/V]	S.G Level [dBm]	Ant. Gain [dBi]	Loss [dB]	Emission Level [dBm]	Limit [dBm]	Margin [dB]
1st channel : 148.025 MHz								
295.78	49.4	V	-53.5	6.7	1.5	-45.3	-20	25.3
592.60	56.2	H	-46.3	6.3	1.9	-38.1		18.1
889.42	58.4	H	-45.0	6.1	2.1	-36.8		16.8
2nd channel : 161.025 MHz								
241.46	59.8	V	-51.3	6.6	1.5	-43.2	-20	23.2
483.96	62.1	V	-47.8	6.6	1.7	-39.5		19.5
3rd channel : 173.975 MHz								
348.16	56.6	V	-65.2	6.9	1.6	-46.7	-20	26.7
522.76	61.2	H	-56.4	6.8	1.8	-41.8		21.8
870.02	63.8	H	-45.6	6.1	2.1	-37.4		17.4

Note :

1. The spectrum bandwidth was set to RBW 100 kHz (freq. up to 1GHz) and RBW 1 MHz (freq above 1GHz).
2. Transmitter was set to the high power output (5 watts) condition.
3. The spectrum was checked from 30 MHz up to the 10th harmonic of the carrier frequency.
4. All emission not reported were found to be more than 20dB below the limit.
5. The EUT was positioned through 3 orthogonal axis and worst-case are reported.
6. Transmitter was set to the high power output (5 watts) condition because the high power setting is the worst case emission condition.
7. The measurement has been made both narrow and wide band but the attached plots are for narrowband. There is no difference in the test result for the bandwidth setting.
8. ERP measurements were performed using the standard battery with full charged condition.
9. The limit was applied according to the section 90.210(d) $50+10\log P$ or -20dBm or 70dBc whichever is less.

5.9 Frequency Stability / Temperature Variation

5.9.1 Specification

FCC Rules Part 2, Section 2.1055
FCC Rules Part 90, Section 90.213
Industry Canada, RSS-119 Section 7.0

5.9.2 Method of Measurement

ANSI/TIA-603-B-2002 Section 2.2.2

5.9.3 Measurement Set-Up

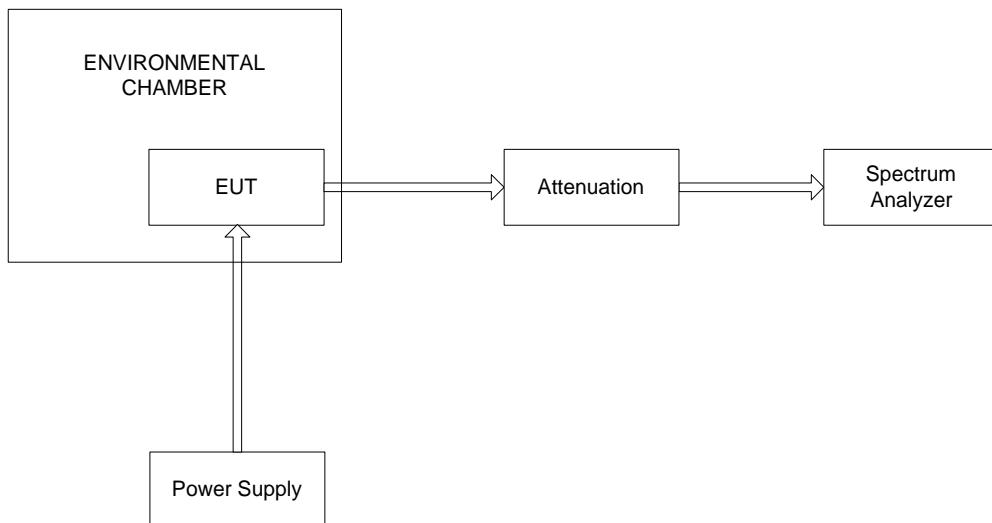


Fig.8

5.9.4 Test Equipment List

Equipment	Model Name	Manufacturer
EUT	SP1102	Maxon CIC Corp.
Power Supply	IPS-30B03DD	INTERACT
Attenuator	33-30-33	WEINSCHEL
Spectrum Analyzer	FSP7	Rohde & Shwarz
Environmental Chamber	EN-GLMP-54	ENEX

5.9.5 Test Procedure

- The unit was turn-up in accordance with the alignment procedure stated in the FIG. 8 , and was loaded into a 50 ohm resistive termination.
- With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
- With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted
 - within one minute.
- The temperature tests were performed for the worst case.
- FCC Limits (according to part 90.213) : $2.5 \times 10^{-6} \times \text{Frequency}$


5.9.6 Test Result 1

FCC Rules :	Part 2 §2.1055 & §90.213
IC Rules :	RSS-119 Section 7.0
Operating Frequency :	148.025 MHz
Channel :	1st Channel
Power Output :	5 Watts
Modulation :	Non-Modulation
Reference Voltage :	7.5 VDC


5.9.6.1 Data

Voltage (%)	Power Supply (Vdc)	Temperature (°C)	Frequency (Hz)	Deviation (ppm)	Limit (ppm)
100 %	7.5	-30	148024964	-0.24	2.5
100 %	7.5	-20	148024972	-0.19	2.5
100 %	7.5	-10	148024978	-0.15	2.5
100 %	7.5	0	148024984	-0.11	2.5
100 %	7.5	+10	148025008	0.05	2.5
100 %	7.5	+20 (ref)	148025008	0.05	2.5
100 %	7.5	+30	148025006	0.04	2.5
100 %	7.5	+40	148024986	-0.09	2.5
100 %	7.5	+50	148024974	-0.18	2.5
100 %	7.5	+60	148025082	0.55	2.5
85 %	6.375	+20	148025000	0.00	2.5
115 %	8.625	+20	148025006	0.04	2.5

5.9.6.2 Graph

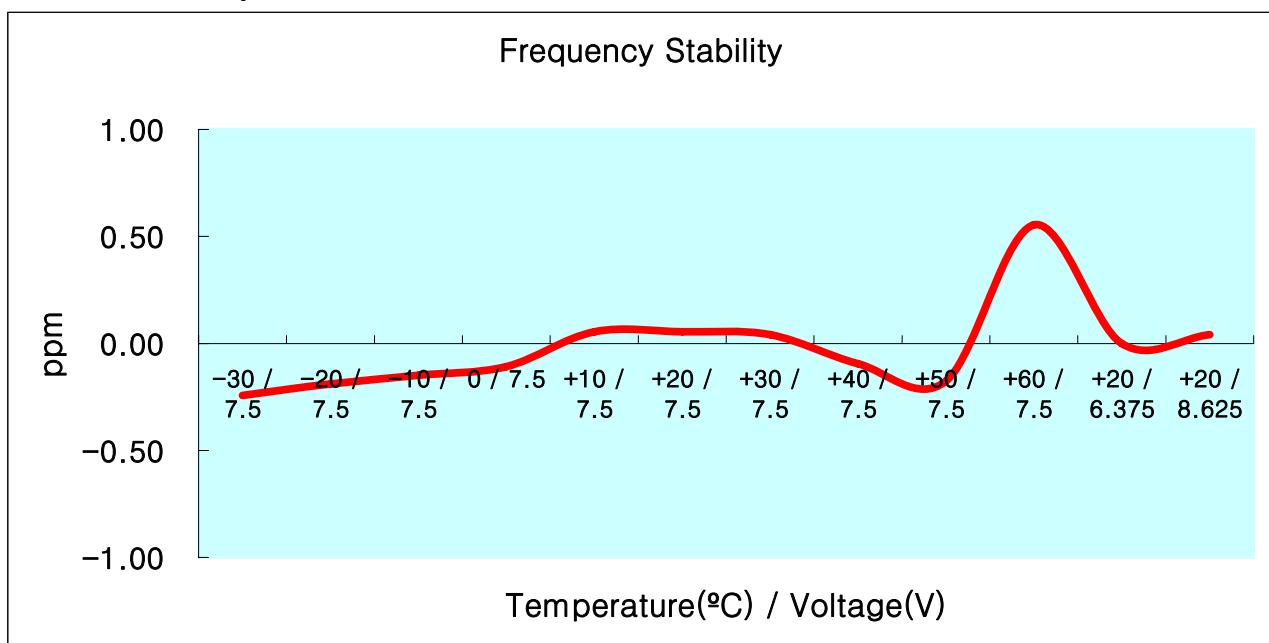


5.9.6.3 Plot 1 (-30°C)

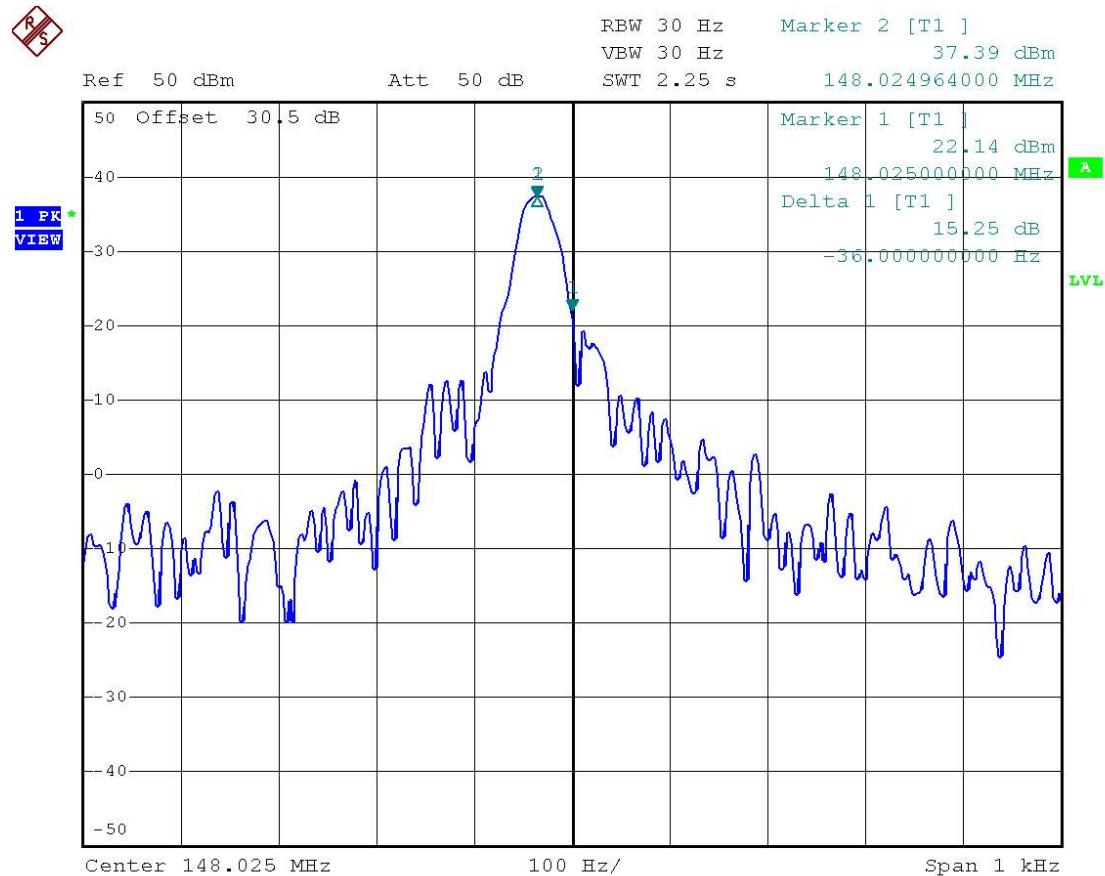


Date: 31.OCT.2008 14:48:44

5.9.6.4 Plot 2 (-20°C)

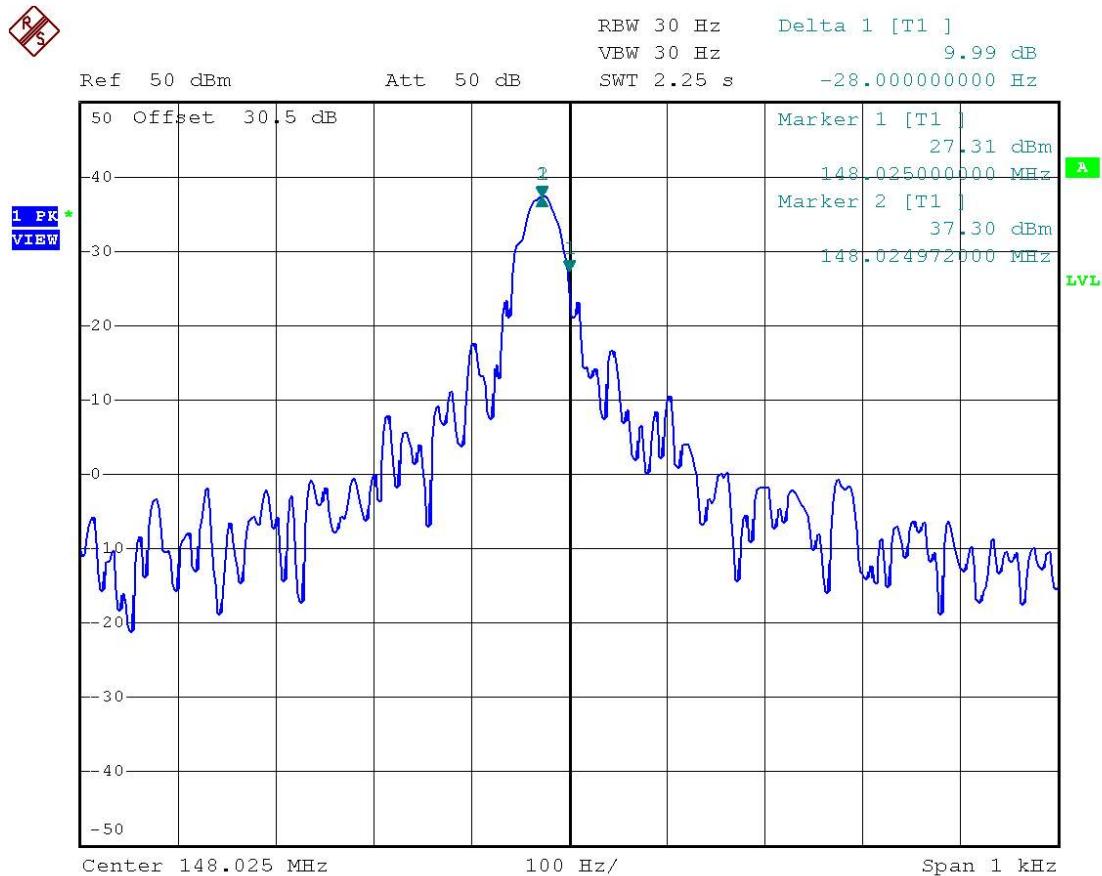


Date: 31.OCT.2008 14:52:04

5.9.6.5 Plot 3 (-10°C)

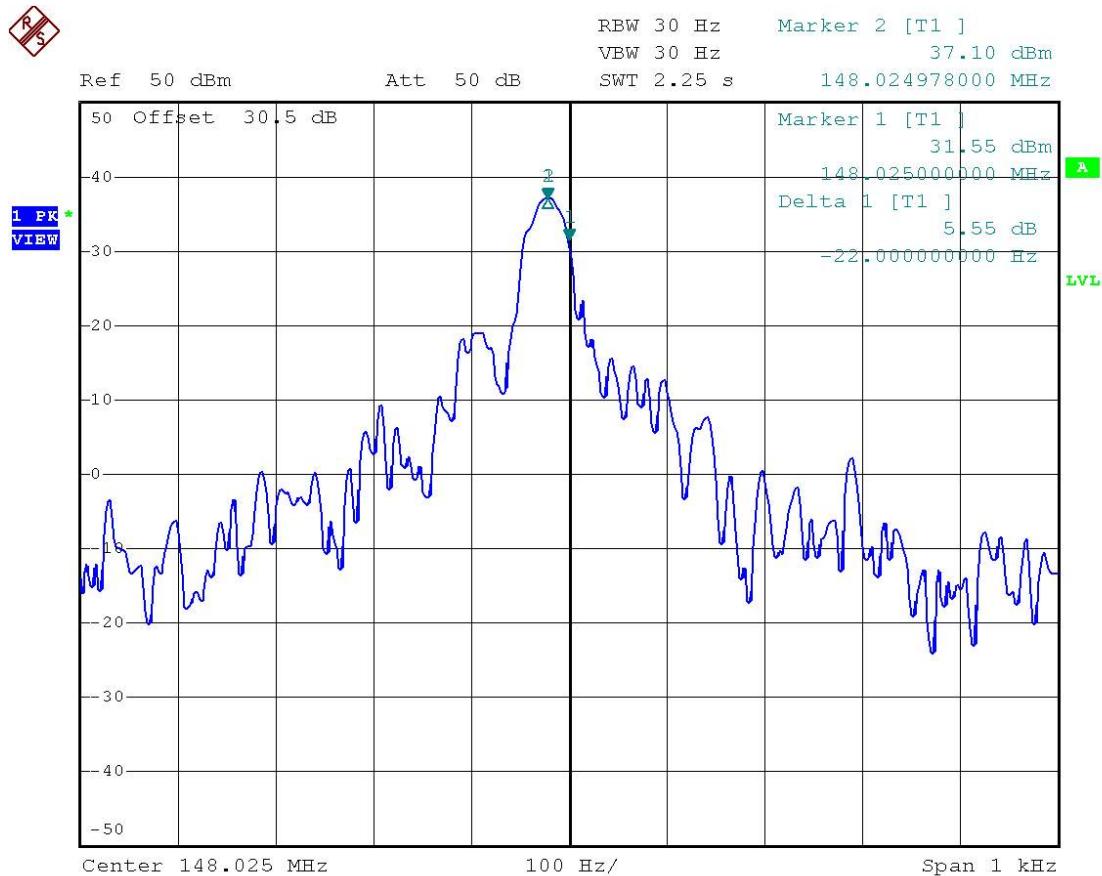


Date: 31.OCT.2008 15:11:05

5.9.6.6 Plot 4 (0°C)

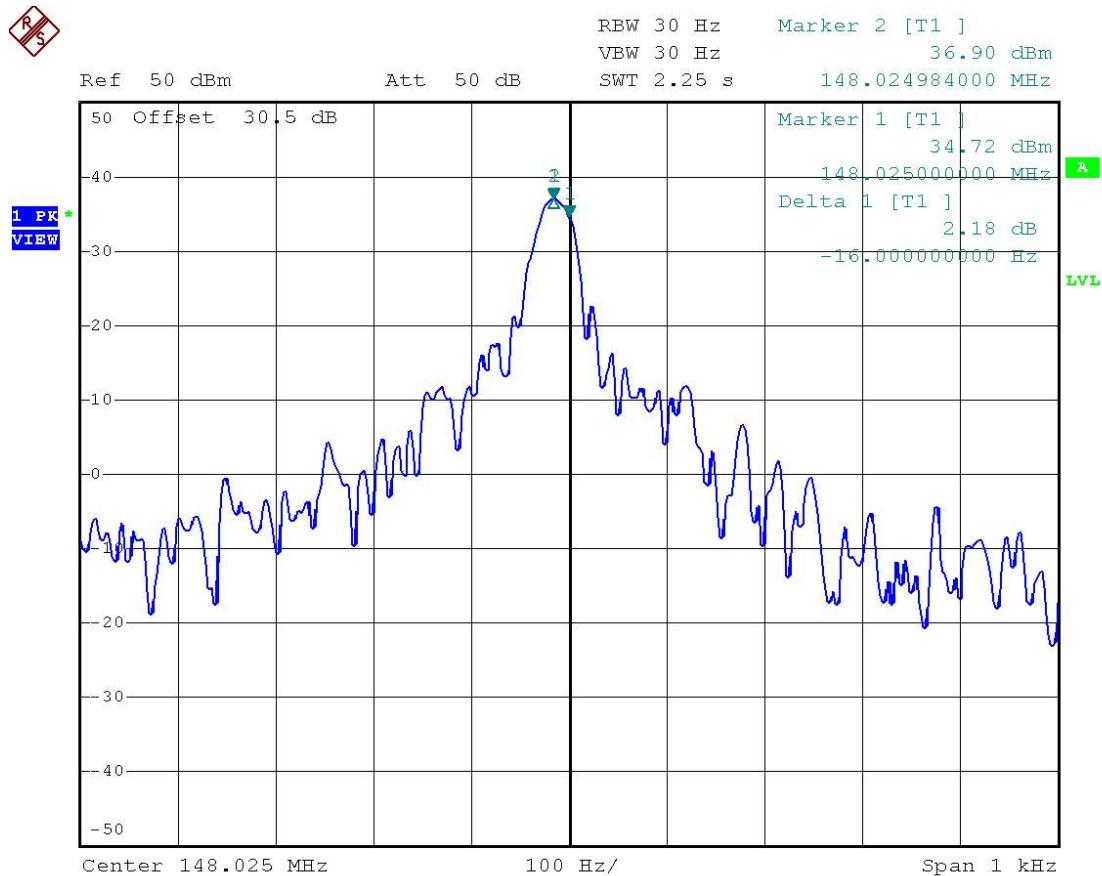


Date: 31.OCT.2008 15:23:32

5.9.6.7 Plot 5 (+10°C)

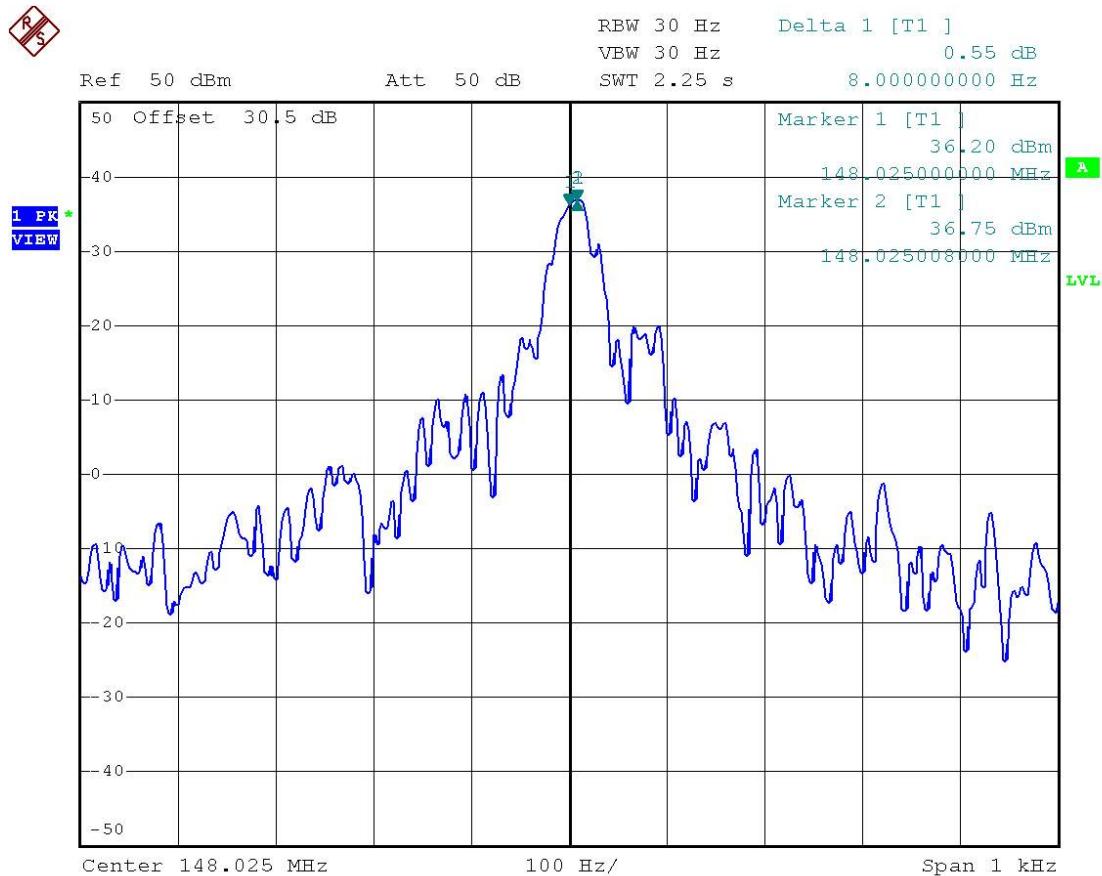


Date: 31.OCT.2008 15:40:04

5.9.6.8 Plot 6 (+20°C)

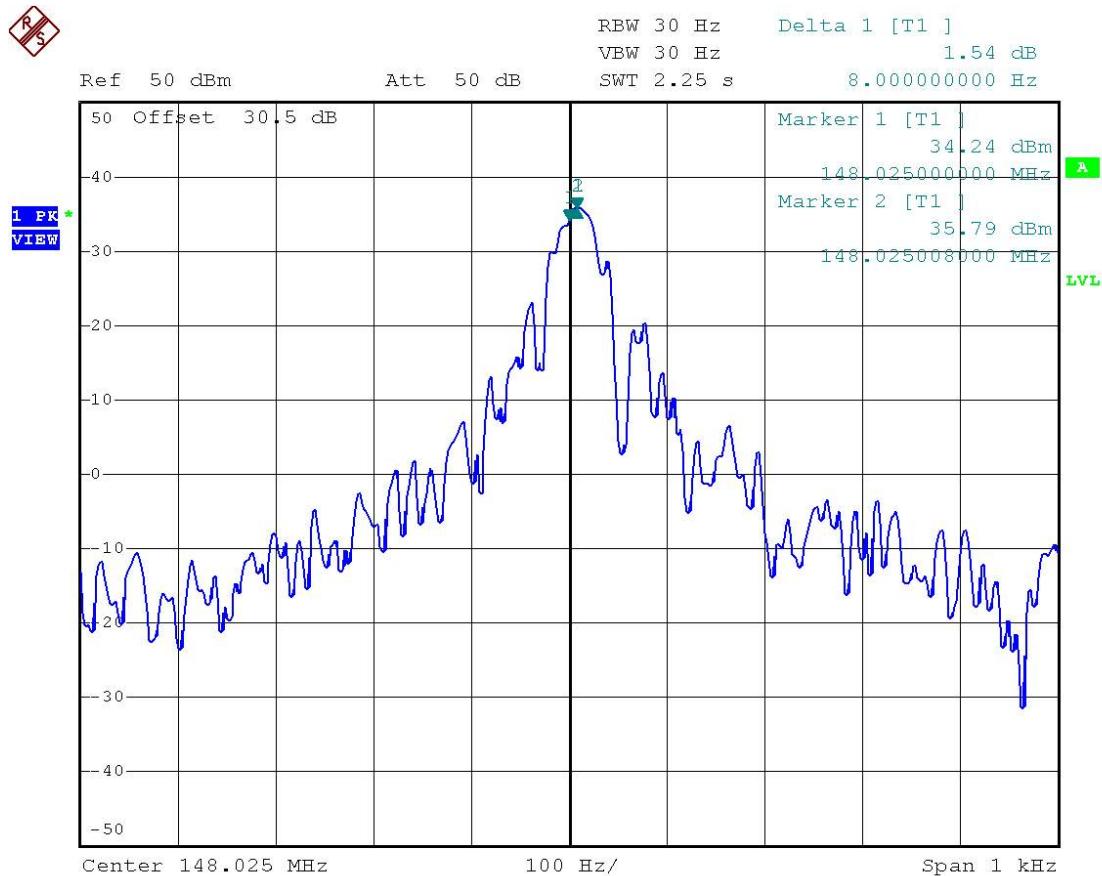


Date: 31.OCT.2008 13:57:39

5.9.6.9 Plot 7 (+30°C)

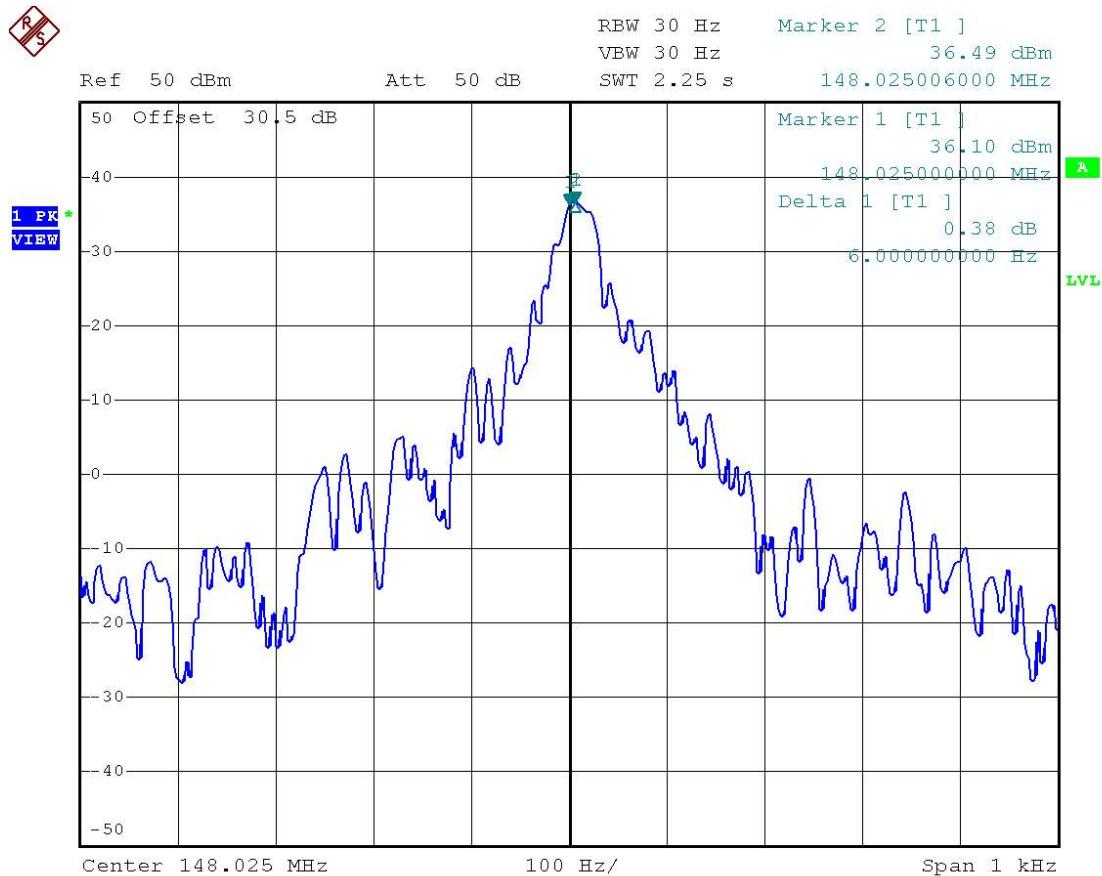


Date: 31.OCT.2008 15:53:35

5.9.6.10 Plot 8 (+40°C)

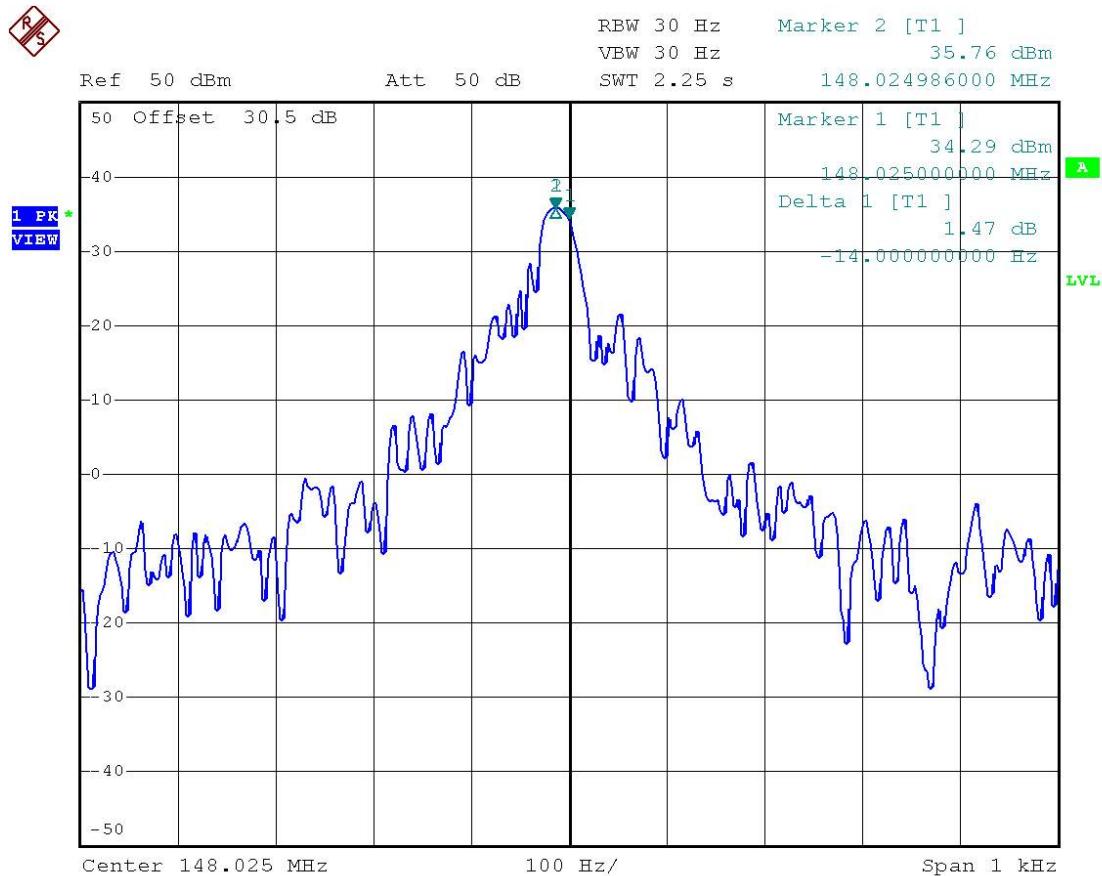


Date: 31.OCT.2008 16:10:18

5.9.6.11 Plot 9 (+50°C)

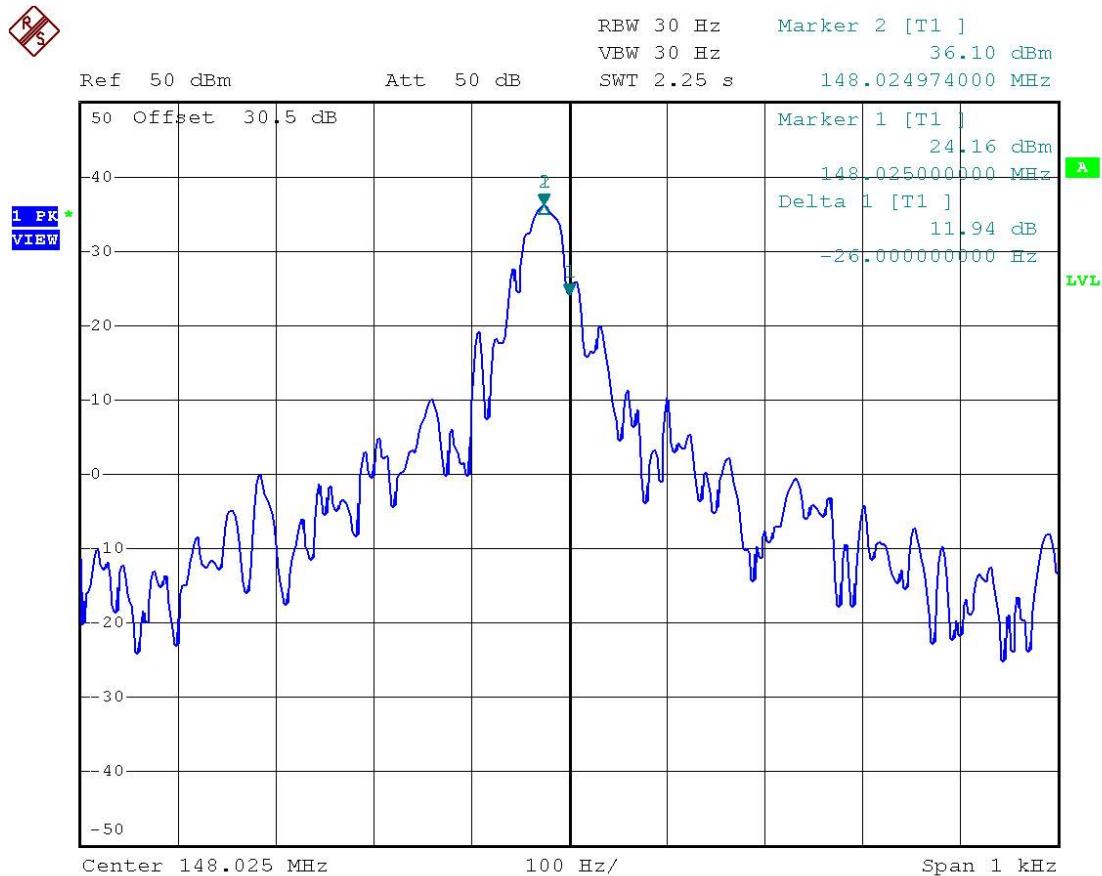

Date: 31.OCT.2008 18:46:18

5.9.6.12 Plot 10 (+60°C)

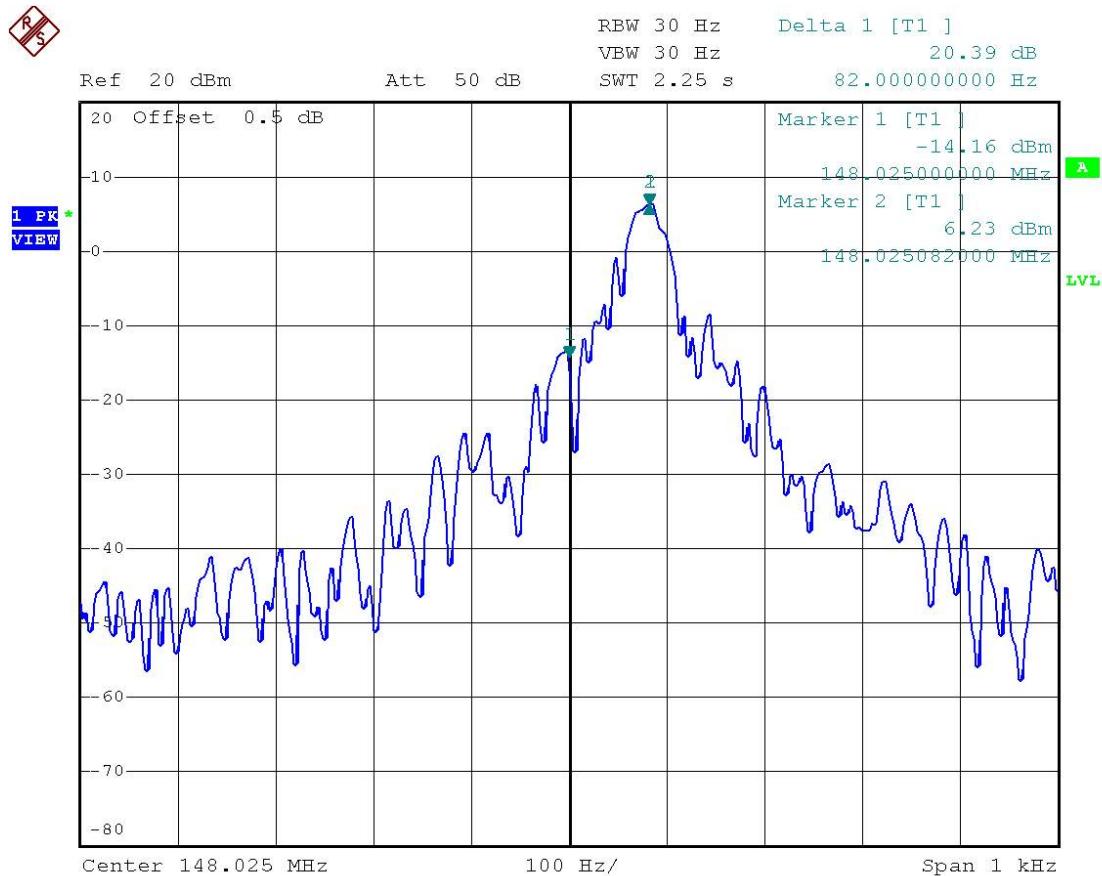

Date: 3.NOV.2008 09:49:05