



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Wireless ADSL 2+ ROUTER

Model: WA41R

Trade Name: PRO-NETS / Speed Com+ / Jet Com

Issued to

PRO-NETS TECHNOLOGY CORPORATION

**7F, No.95, Li-De St., Chung Ho City 235,
Taipei, Taiwan R.O.C.**

Issued by



Compliance Certification Services Inc.
No. 11, Wu-Gong 6th Rd., Wugu Industrial Park,
Taipei Hsien 248, Taiwan (R.O.C.)
<http://www.ccsrf.com>
service@ccsrf.com



***Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.*



TABLE OF CONTENTS

- 1. TEST RESULT CERTIFICATION.....3**
- 2. EUT DESCRIPTION4**
- 3. TEST METHODOLOGY5**
 - 3.1 EUT CONFIGURATION5
 - 3.2 EUT EXERCISE.....5
 - 3.3 GENERAL TEST PROCEDURES.....5
 - 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....6
 - 3.5 DESCRIPTION OF TEST MODES7
- 4. INSTRUMENT CALIBRATION.....8**
 - 4.1 MEASURING INSTRUMENT CALIBRATION8
 - 4.2 MEASUREMENT EQUIPMENT USED9
 - 4.3 MEASUREMENT UNCERTAINTY10
- 5. FACILITIES AND ACCREDITATIONS11**
 - 5.1 FACILITIES11
 - 5.2 EQUIPMENT.....11
 - 5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....12
- 6. SETUP OF EQUIPMENT UNDER TEST13**
 - 6.1 SETUP CONFIGURATION OF EUT.....13
 - 6.2 SUPPORT EQUIPMENT13
- 7. FCC PART 15.247 REQUIREMENTS.....14**
 - 7.1 6DB BANDWIDTH14
 - 7.2 PEAK POWER.....22
 - 7.3 AVERAGE POWER24
 - 7.4 BAND EDGES MEASUREMENT26
 - 7.5 PEAK POWER SPECTRAL DENSITY.....43
 - 7.6 SPURIOUS EMISSIONS.....51
 - 7.7 RADIATED EMISSIONS58
 - 7.8 POWERLINE CONDUCTED EMISSIONS.....75
- APPENDIX I RADIO FREQUENCY EXPOSURE78**
- APPENDIX II PHOTOGRAPHS OF TEST SETUP81**
- APPENDIX 1 - PHOTOGRAPHS OF EUT**



1. TEST RESULT CERTIFICATION

Applicant: PRO-NETS TECHNOLOGY CORPORATION
7F, No.95, Li-De St., Chung Ho City 235, Taipei, Taiwan R.O.C.

Equipment Under Test: Wireless ADSL 2+ ROUTER

Trade Name: PRO-NETS / Speed Com+ / Jet Com

Model Number: WA41R

Date of Test: April 2 ~ 21, 2010

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Rex Lai
Section Manager
Compliance Certification Services Inc.

Gina Lo
Section Manager
Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	Wireless ADSL 2+ ROUTER
Trade Name	PRO-NETS / Speed Com+ / Jet Com
Model Number	WA41R
Model Discrepancy	N/A
Power Adapter	Power from Power Adapter CWT / CAP012121 I/P: 100-240VAC, 47-63Hz, 0.35A O/P: 12.0V, 1.0A
Frequency Range	2412 ~ 2462 MHz
Transmit Power	IEEE 802.11b mode: 19.94 dBm IEEE 802.11g mode: 19.99 dBm draft 802.11n Standard-20 MHz Channel mode: 19.68 dBm draft 802.11n Wide-40 MHz Channel mode: 19.87 dBm
Modulation Technique	IEEE 802.11b mode: DSSS (1, 2, 5.5 and 11 Mbps) IEEE 802.11g mode: OFDM (6, 9, 12, 18, 24, 36, 48 and 54 Mbps) draft 802.11n Standard-20 MHz Channel mode: OFDM (6.5, 7.22, 13, 14.44, 19.5, 21.67, 26, 28.89, 39, 43.33, 52, 57.78, 58.5, 65.0, 72.22Mbps) draft 802.11n Wide-40 MHz Channel mode: OFDM (13.5, 15, 27, 30, 40.5, 45, 54, 60, 81, 90, 108, 120, 121.5, 135, 150Mbps)
Number of Channels	IEEE 802.11b/g mode: 11 Channels draft 802.11n Standard-20 MHz Channel mode: 11 Channels draft 802.11n Wide-40 MHz Channel mode: 7 Channels
Antenna Specification	Dipole Antenna / Gain: 2 dBi

Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: RXZ-WA41R filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

The EUT (model: WA41R) had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

IEEE 802.11b mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE 802.11g mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

draft 802.11n Standard-20 MHz Channel mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

draft 802.11n Wide-40 MHz Channel mode:

Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.



4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	03/03/2011
Spectrum Analyzer	R&S	FSEK30	100264	04/13/2011

3M Semi Anechoic Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	10/26/2010
EMI Test Receiver	R&S	ESCI	100064	02/04/2011
Pre-Amplifier	Mini-Circuits	ZFL-1000LN	SF350700823	01/13/2011
Pre-Amplifier	MITEQ	AFS44-00102650-42-10P-44	1415367	11/20/2010
Bilog Antenna	Sunol Sciences	JB3	A030105	09/11/2010
Horn Antenna	EMCO	3117	00055165	12/07/2010
Loop Antenna	EMCO	6502	8905/2356	05/28/2010
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
Site NSA	CCS	N/A	N/A	12/31/2010
Test S/W	EZ-EMC (CCS-3A1RE)			

Powerline Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESHS30	828144/003	12/06/2010
LISN	EMCO	3825/2	9106-1809	05/02/2011
LISN	SCHAFFNER	NNB 41	03/10013	12/03/2010



4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 1.6202
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0606
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9979
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5790
3M Semi Anechoic Chamber / 8G~18G	+/- 2.5928
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7212
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9520

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT




Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	 Testing Laboratory 1309
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	Notebook PC	DELL	PP05L	CBNLD1S	E2K5HCKT	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
2.	LCD Monitor	DELL	2407WFPb	CN-0FC255-46633-6 75-22TJS	FCC DoC	Shielded, 1.8m with 2 cores	Unshielded, 1.8m
3.	320GB 2.5" HDD	Seagate	9ZA2MG-500	538224 2806	FCC DoC	Shielded, 1.8m	N/A
4.	USB Mouse	Logitech	M-UAG96B	HC8500L	FCC DoC	Shielded, 1.8m	N/A
5	Integrated Ethernet Switch (Remote)	ZyXEL	IES-1000	S52510354	N/A	N/A	N/A
6	Notebook PC (Remote)	IBM	2672 (X31)	99PBTKB	FCC DoC	LAN Cable: Unshielded, 10m	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
7	Notebook PC (Remote)	DELL	PP19L	GK102 A00	QDS-BRCM1021	Line Cable: Unshielded, 1.0m	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
8.	Notebook PC (Remote)	DELL	PP10L	61G6Q1S	FCC DoC	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.


7. FCC PART 15.247 REQUIREMENTS

7.1 6DB BANDWIDTH

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100 kHz, VBW = RBW, Span = 50 MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

TEST RESULTS

No non-compliance noted



Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
Low	2412	9830	>500	PASS
Mid	2437	9080		PASS
High	2462	9080		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
Low	2412	14830	>500	PASS
Mid	2437	15500		PASS
High	2462	15670		PASS

Test mode: draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
Low	2412	14580	>500	PASS
Mid	2437	15250		PASS
High	2462	15830		PASS

Test mode: draft 802.11n Wide-40 MHz Channel mode

Channel	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
Low	2422	29750	>500	PASS
Mid	2437	29830		PASS
High	2452	29420		PASS




IEEE 802.11b mode

6dB Bandwidth (CH Low)

Agilent 06:04:03 Apr 20, 2010

R T

Δ Mkr1 9.83 MHz
0.20 dB

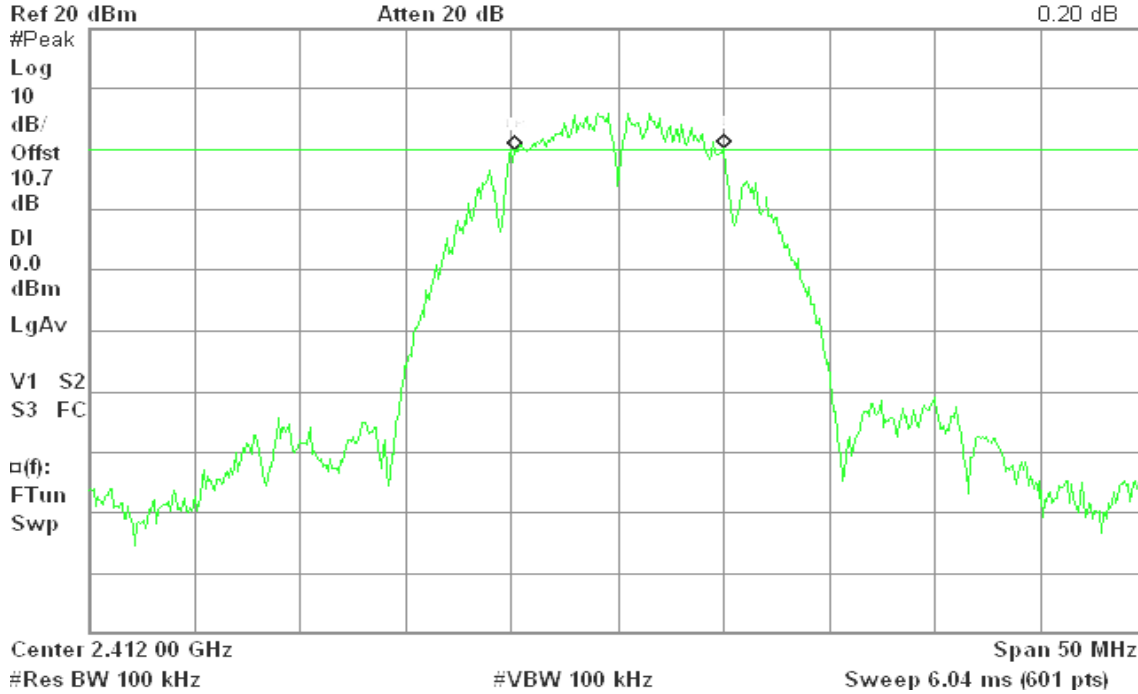


6dB Bandwidth (CH Mid)

Agilent 06:18:21 Apr 20, 2010

R T

Δ Mkr1 9.08 MHz
-0.22 dB

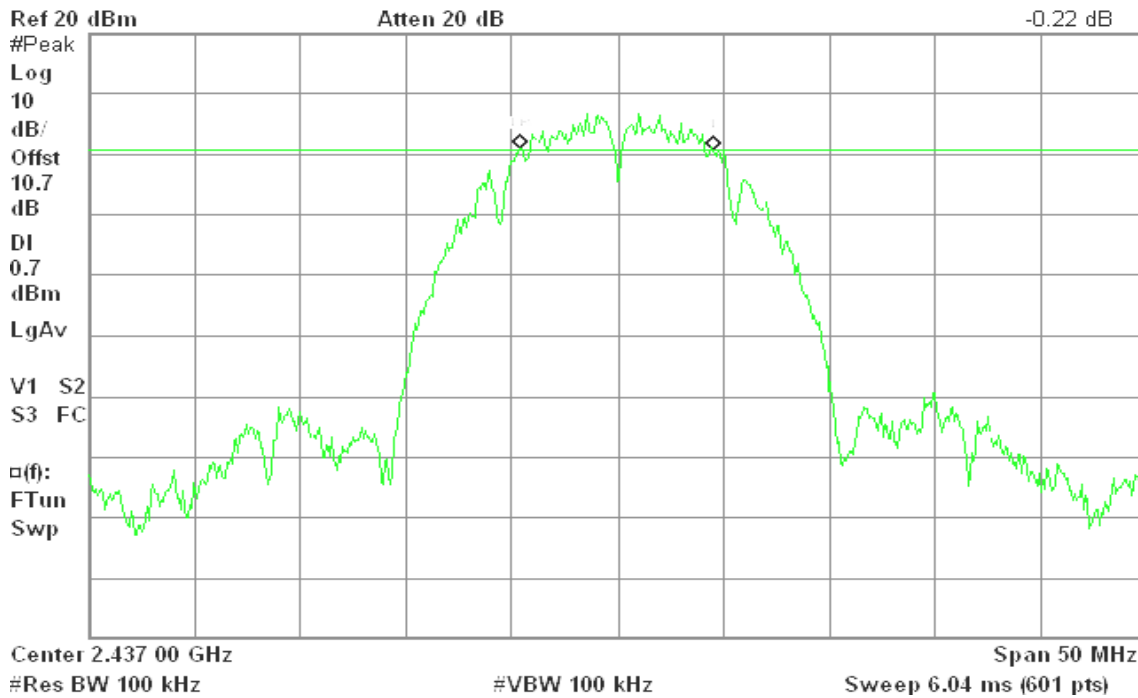




6dB Bandwidth (CH High)

Agilent 06:23:27 Apr 20, 2010

R L

Δ Mkr1 9.08 MHz
0.33 dB

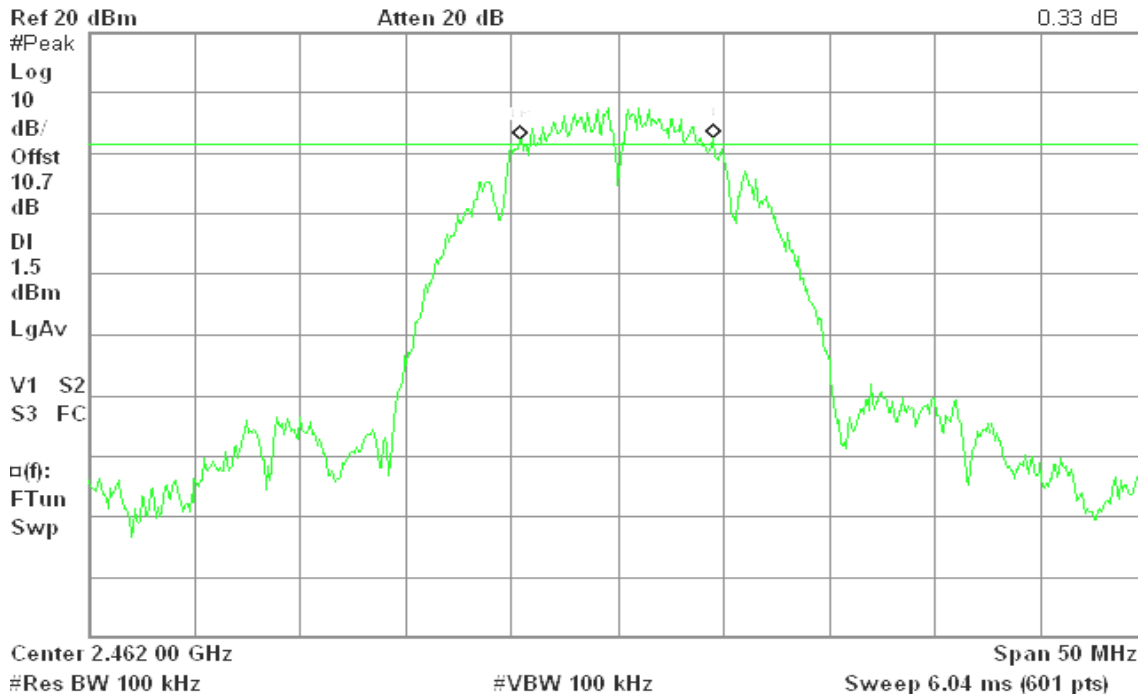


IEEE 802.11g mode

6dB Bandwidth (CH Low)

Agilent 06:30:35 Apr 20, 2010

R T

Δ Mkr1 14.83 MHz
-1.52 dB

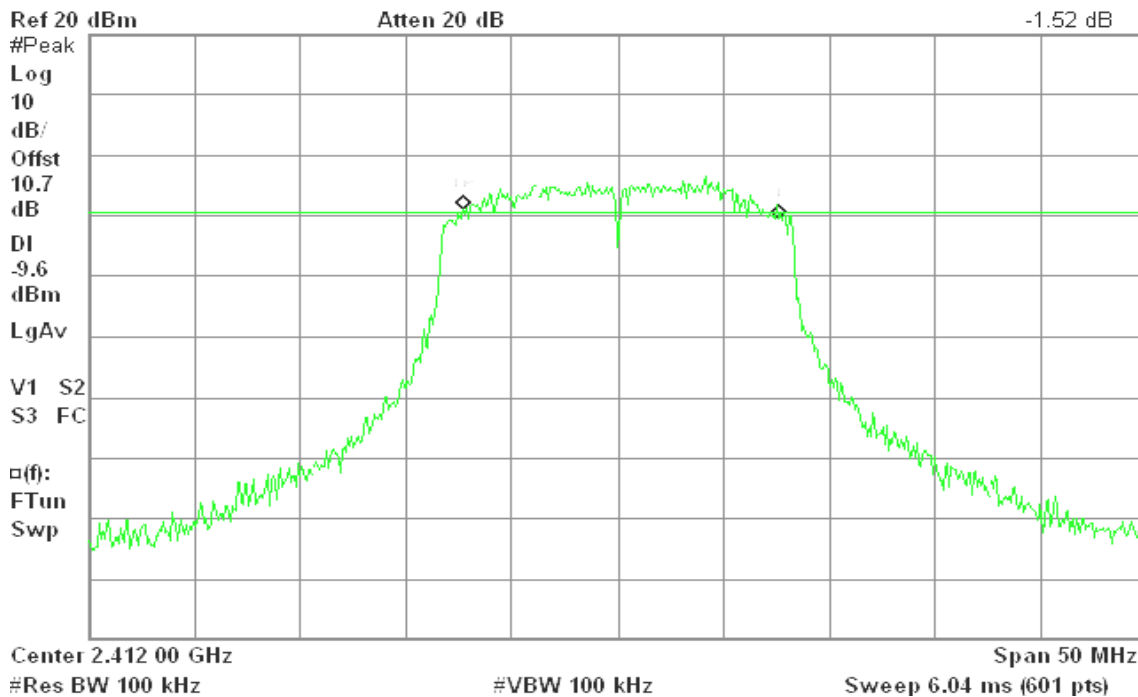




6dB Bandwidth (CH Mid)

Agilent 06:35:46 Apr 20, 2010

R T

Δ Mkr1 15.50 MHz
0.80 dB

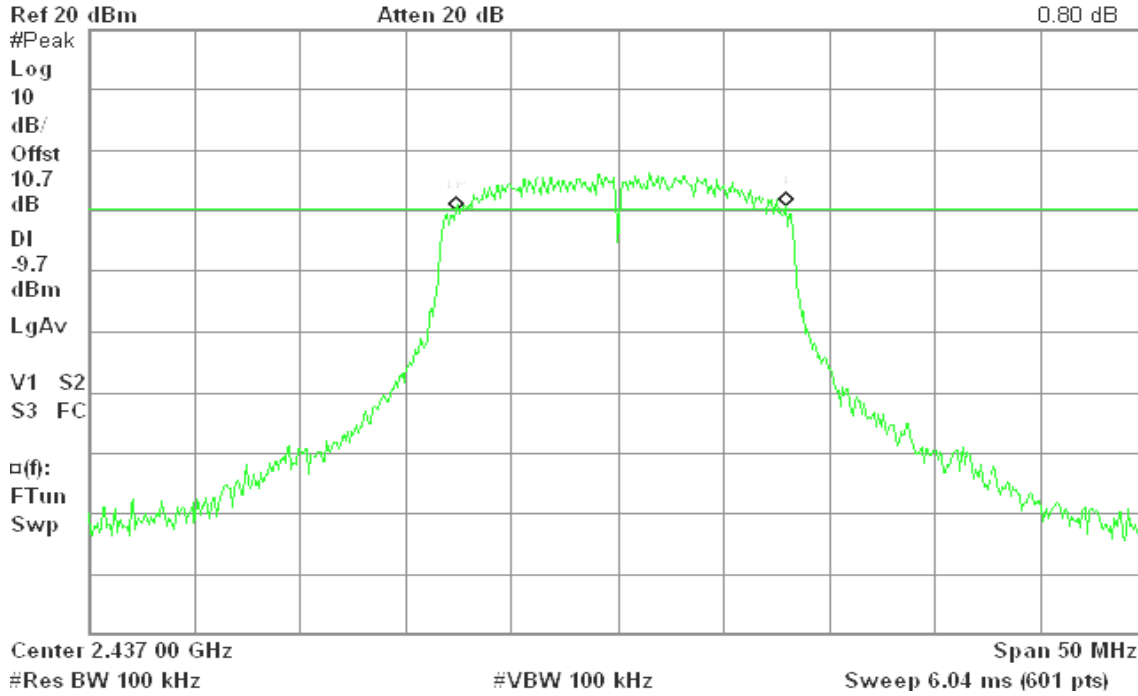


6dB Bandwidth (CH High)

Agilent 06:44:02 Apr 20, 2010

R T

Δ Mkr1 15.67 MHz
0.22 dB

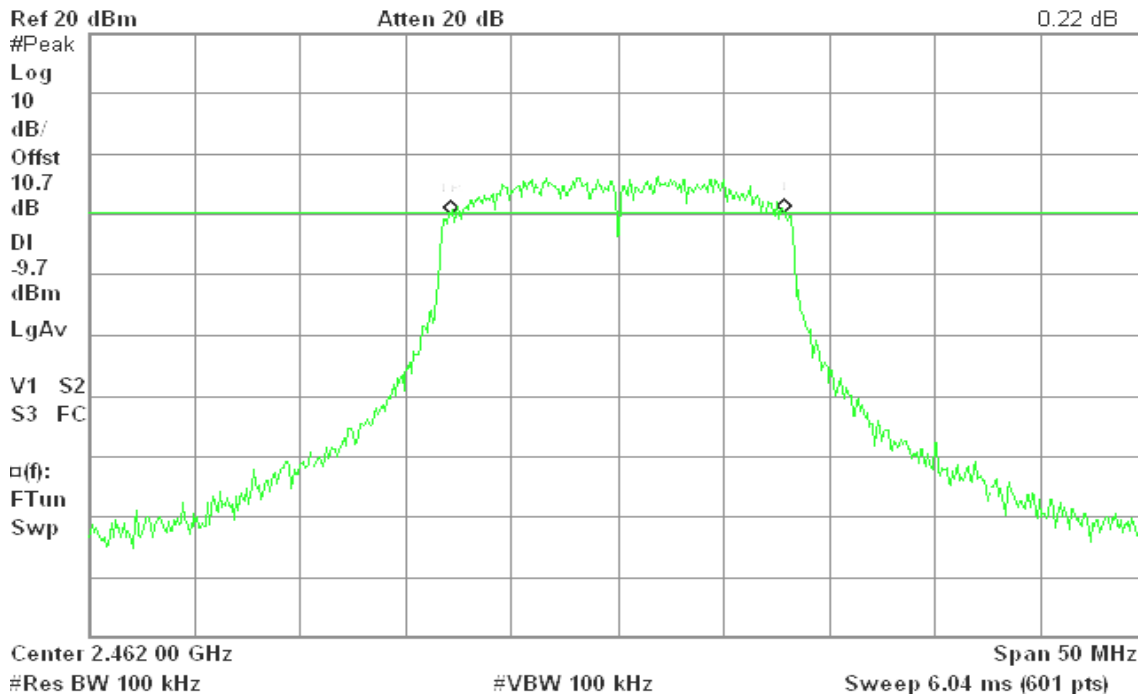




draft 802.11n Standard-20 MHz Channel mode

6dB Bandwidth (CH Low)

Agilent 06:55:09 Apr 20, 2010

R T

Δ Mkr1 14.58 MHz
-0.43 dB

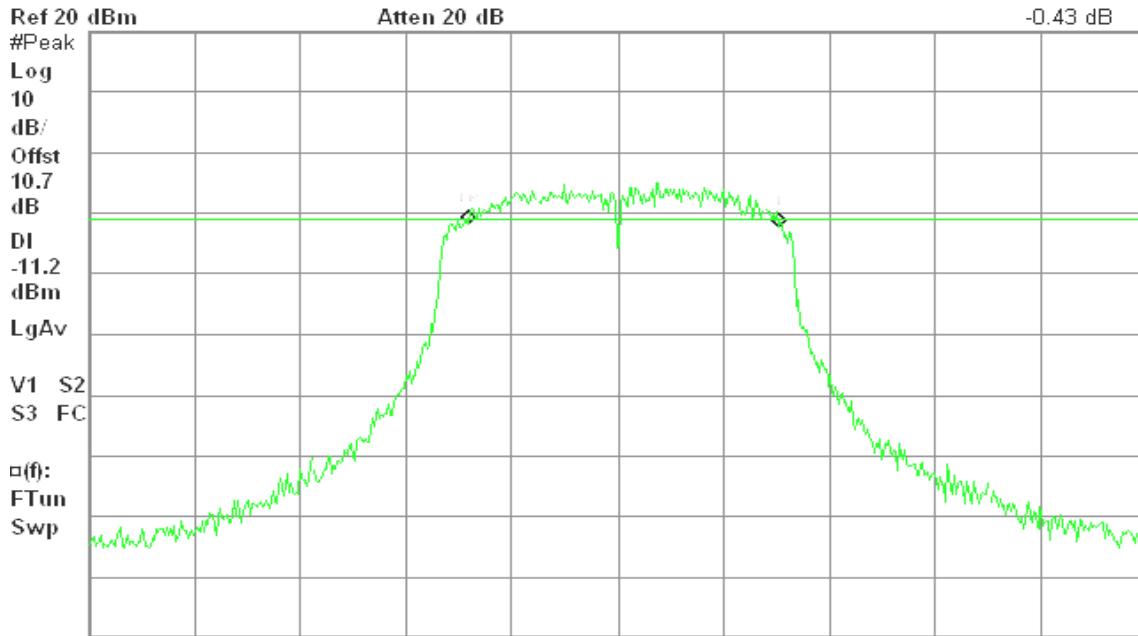


Center 2.412 00 GHz Span 50 MHz
#Res BW 100 kHz #VBW 100 kHz Sweep 6.04 ms (601 pts)

6dB Bandwidth (CH Mid)

Agilent 07:01:08 Apr 20, 2010

R T

Δ Mkr1 15.25 MHz
-0.90 dB

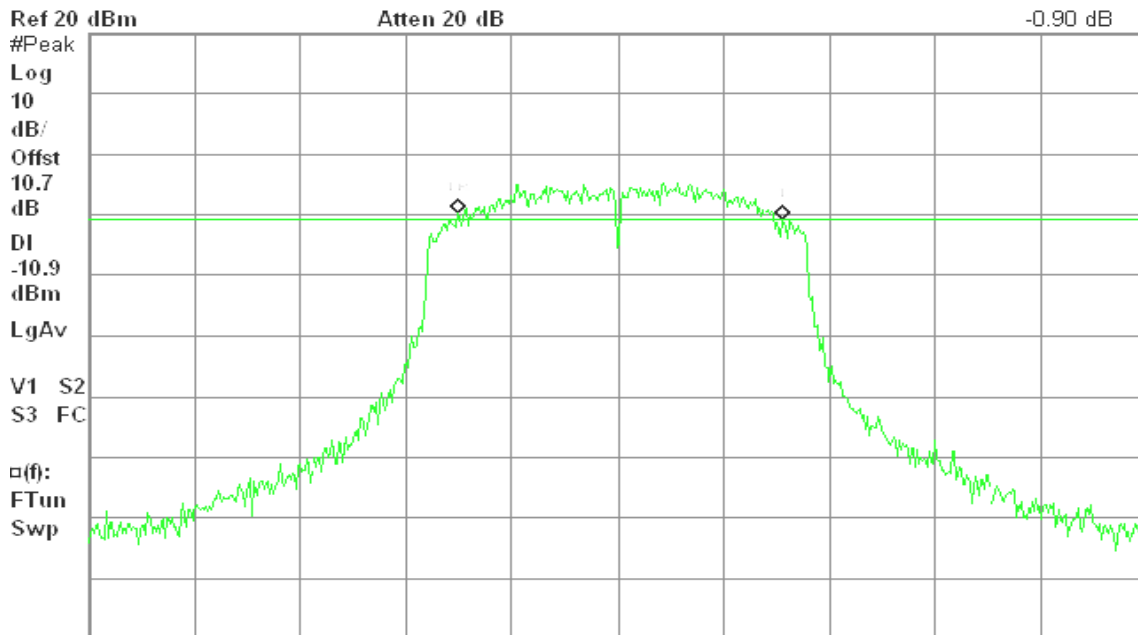

Center 2.437 00 GHz Span 50 MHz
#Res BW 100 kHz #VBW 100 kHz Sweep 6.04 ms (601 pts)




6dB Bandwidth (CH High)

Agilent 07:07:16 Apr 20, 2010

R T

Δ Mkr1 15.83 MHz
-0.72 dB

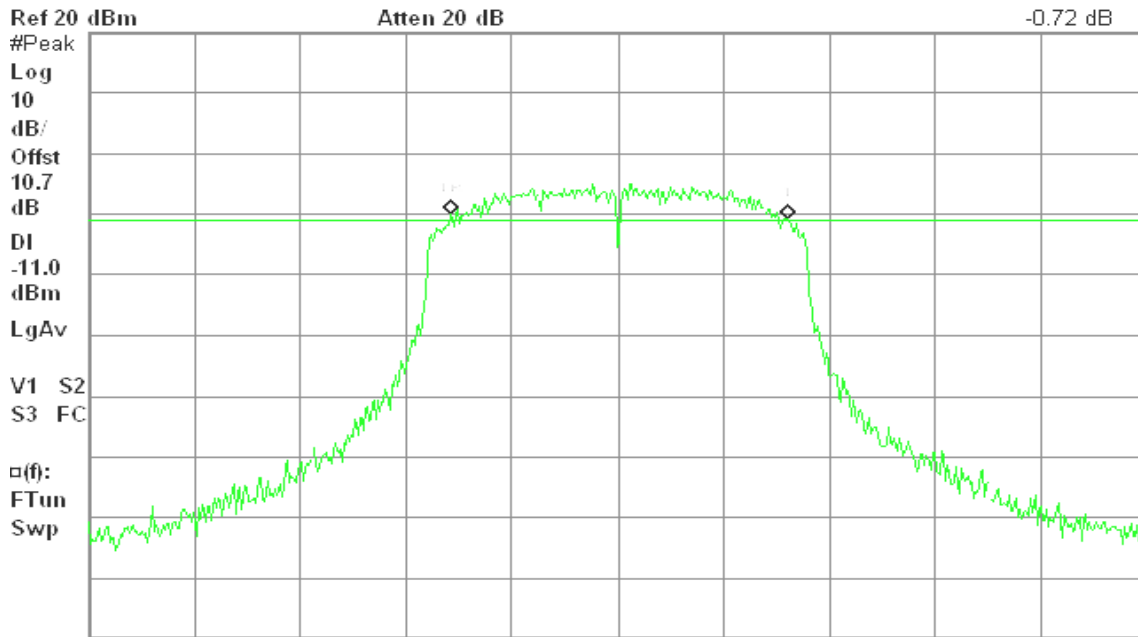

Center 2.462 00 GHz Span 50 MHz
#Res BW 100 kHz #VBW 100 kHz Sweep 6.04 ms (601 pts)


draft 802.11n Wide-40 MHz Channel mode

6dB Bandwidth (CH Low)

Agilent 07:14:29 Apr 20, 2010

R T

Δ Mkr1 29.75 MHz
-0.29 dB

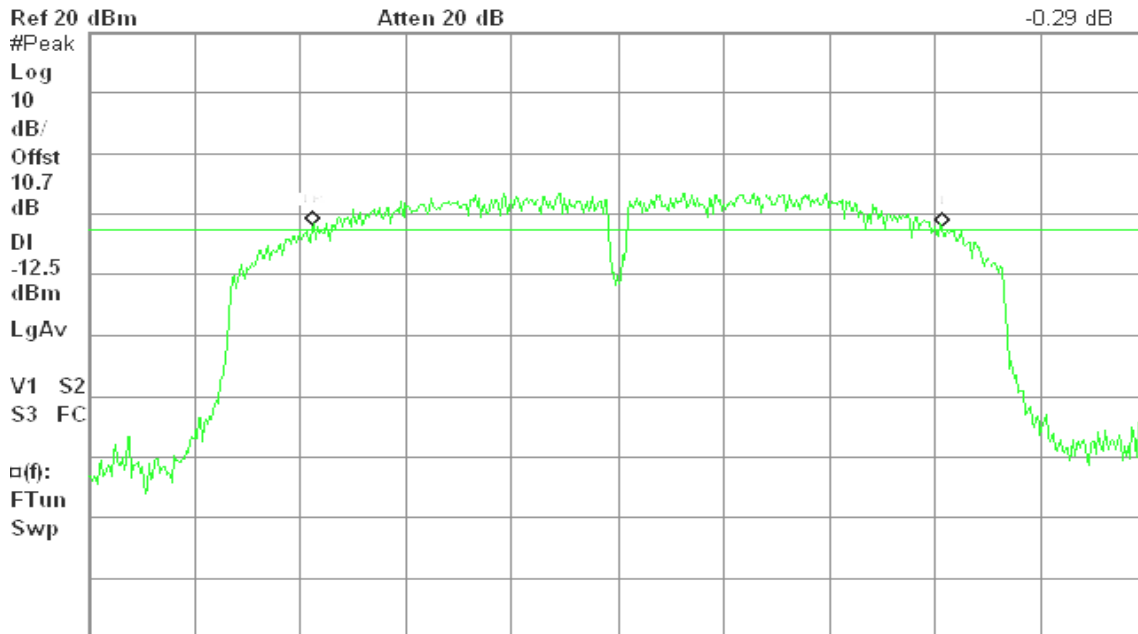

Center 2.422 00 GHz Span 50 MHz
#Res BW 100 kHz #VBW 100 kHz Sweep 6.04 ms (601 pts)




6dB Bandwidth (CH Mid)

Agilent 07:19:12 Apr 20, 2010

R T

Δ Mkr1 29.83 MHz
0.46 dB

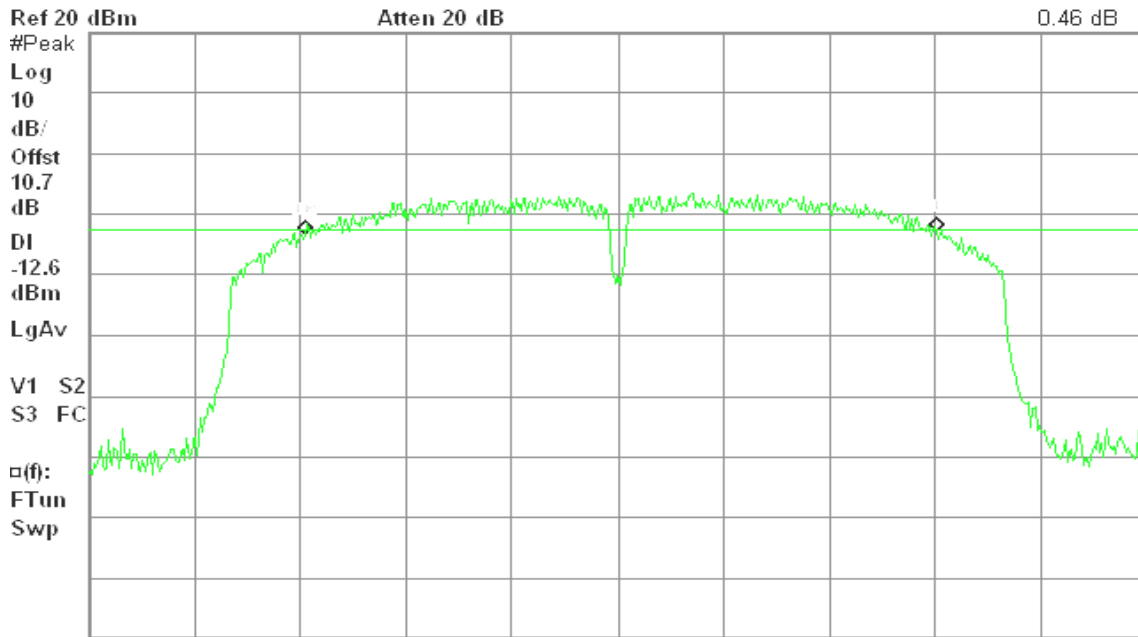


Center 2.437 00 GHz Span 50 MHz
#Res BW 100 kHz #VBW 100 kHz Sweep 6.04 ms (601 pts)

6dB Bandwidth (CH High)

Agilent 07:25:17 Apr 20, 2010

R T

Δ Mkr1 29.42 MHz
1.60 dB

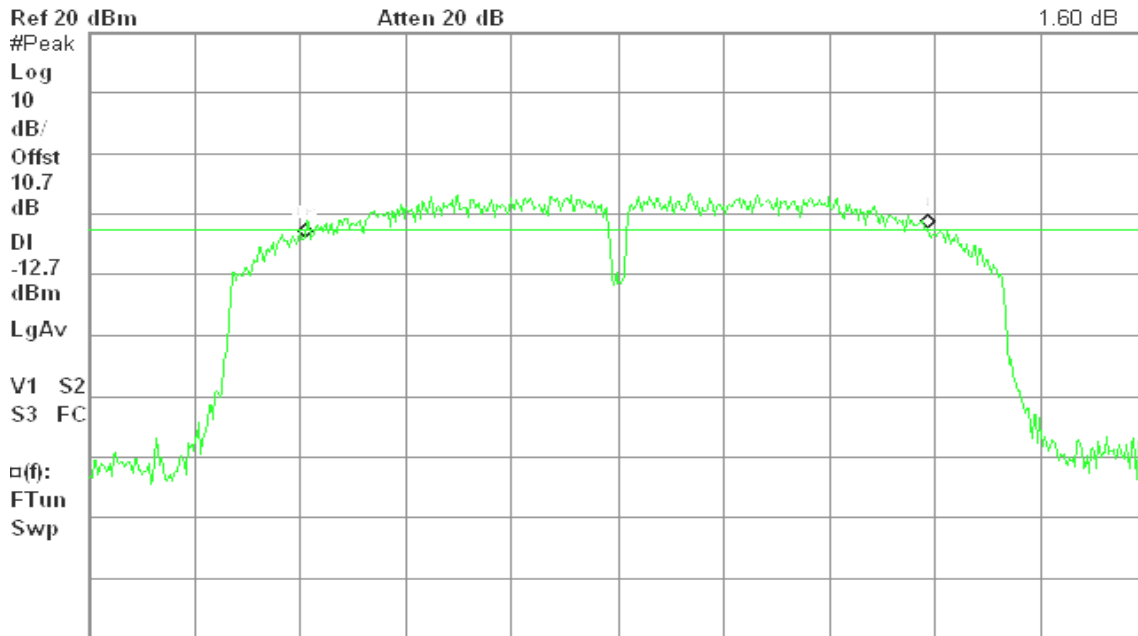

Center 2.452 00 GHz Span 50 MHz
#Res BW 100 kHz #VBW 100 kHz Sweep 6.04 ms (601 pts)




7.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted

**Test Data****Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	19.61	0.09141	1.00	PASS
Mid	2437	19.60	0.09120		PASS
High	2462	19.94	0.09863		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	19.93	0.09840	1.00	PASS
Mid	2437	19.85	0.09661		PASS
High	2462	19.99	0.09977		PASS

Test mode: draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	19.64	0.09204	1.00	PASS
Mid	2437	19.68	0.09290		PASS
High	2462	19.59	0.09099		PASS

Test mode: draft 802.11n Wide-40 MHz Channel mode


Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2422	19.87	0.09705	1.00	PASS
Mid	2437	19.79	0.09528		PASS
High	2452	19.81	0.09572		PASS

7.3 AVERAGE POWER

LIMIT

None; for reporting purposes only.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the average power detection.



TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	16.64	0.04613
Mid	2437	16.79	0.04775
High	2462	17.14	0.05176

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	9.77	0.00948
Mid	2437	9.65	0.00923
High	2462	9.88	0.00973

Test mode: draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	9.06	0.00805
Mid	2437	9.07	0.00807
High	2462	8.92	0.00780

Test mode: draft 802.11n Wide-40 MHz Channel mode


Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2422	10.01	0.01002
Mid	2437	9.78	0.00951
High	2452	9.85	0.00966

7.4 BAND EDGES MEASUREMENT

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

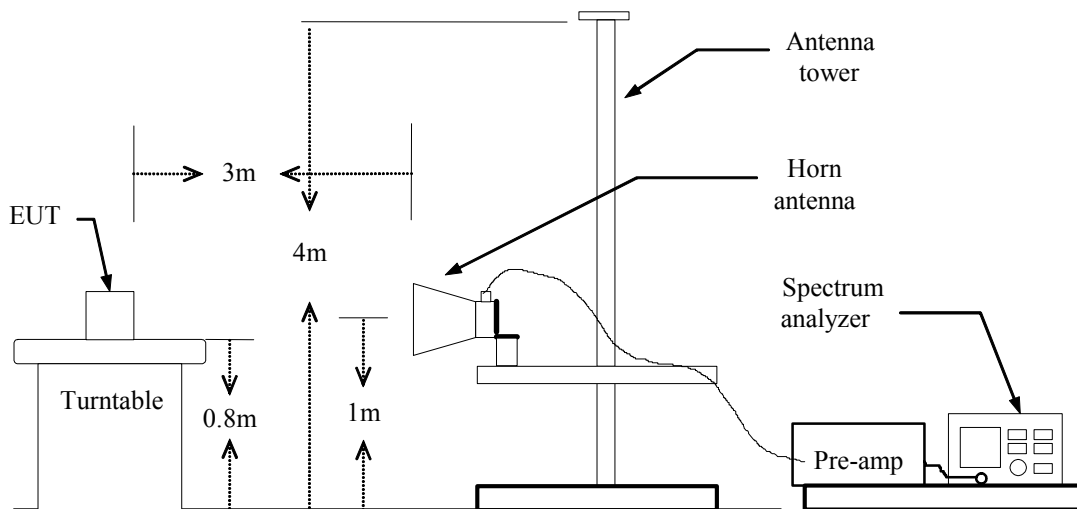

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.



Band Edges (IEEE 802.11b mode / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 20:03:33 Apr 2, 2010

R T

Mkr1 2.390 0 GHz
57.06 dBμV

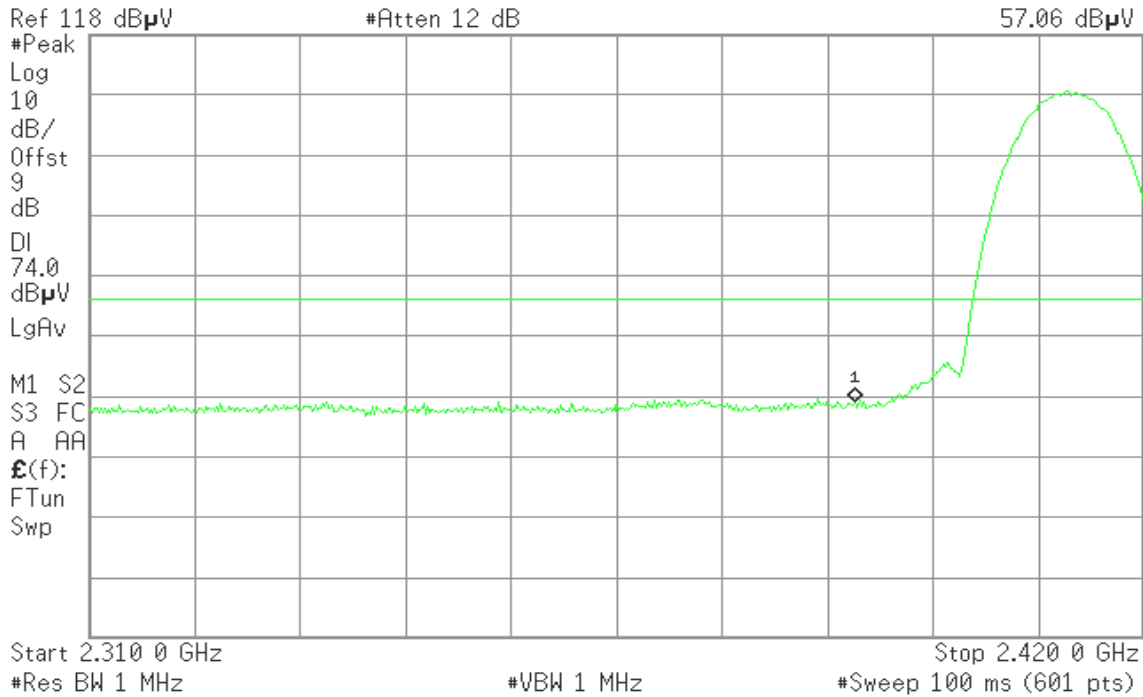


Detector mode: Average

Polarity: Vertical

Agilent 20:04:14 Apr 2, 2010

R T

Mkr1 2.390 0 GHz
43.50 dBμV

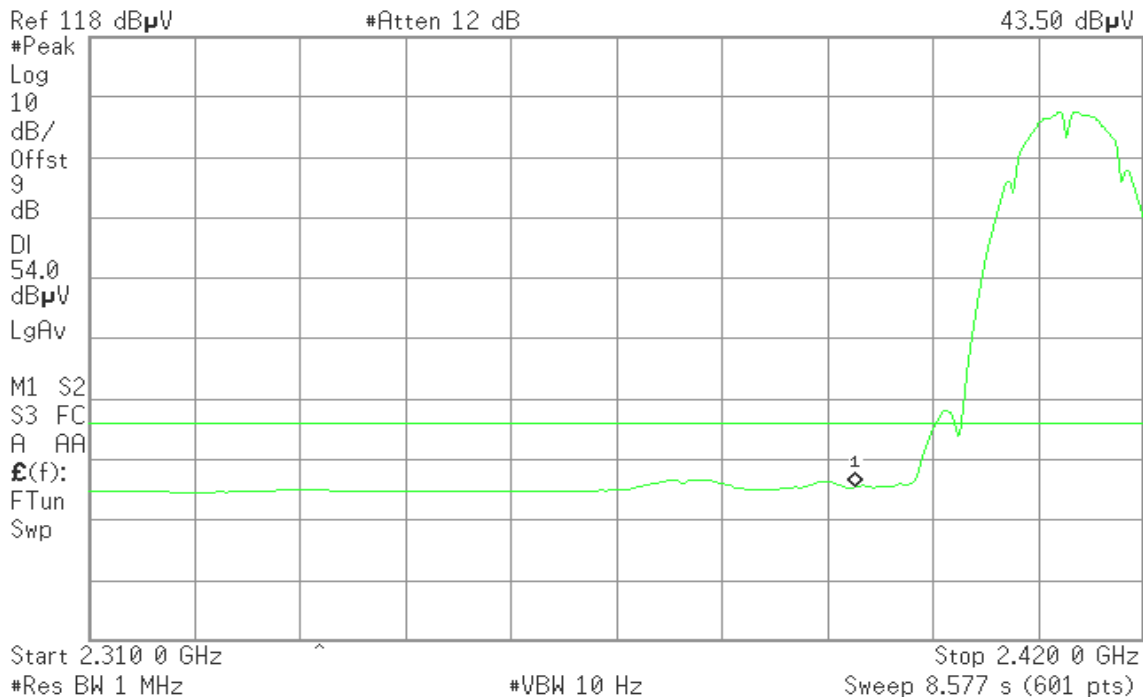




Detector mode: Peak

Polarity: Horizontal

Agilent 19:58:26 Apr 2, 2010

R T

Mkr1 2.390 0 GHz
56.33 dB μ V

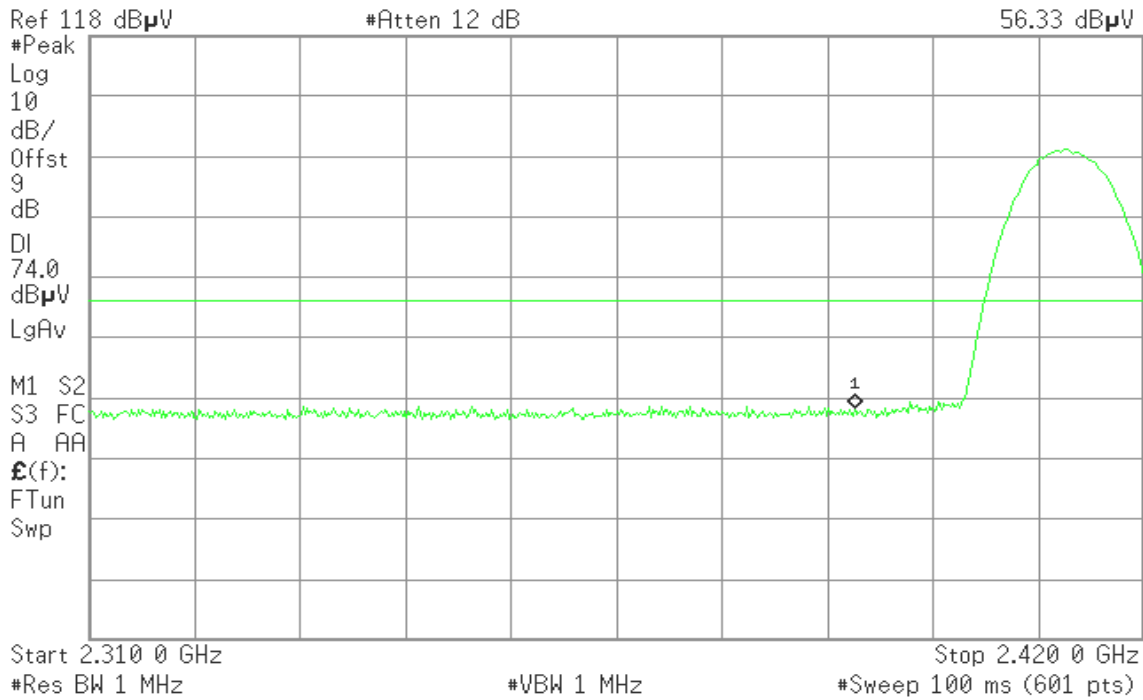


Detector mode: Average

Polarity: Horizontal

Agilent 19:59:22 Apr 2, 2010

R T

Mkr1 2.390 0 GHz
43.05 dB μ V

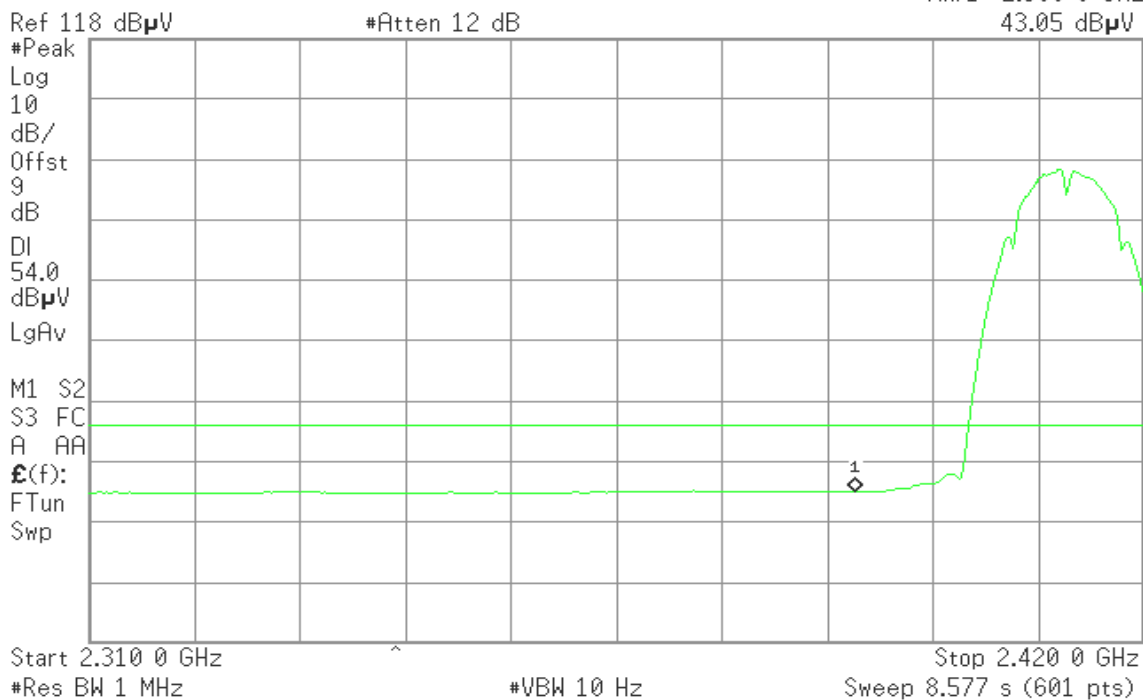



Band Edges (IEEE 802.11b mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 19:22:51 Apr 2, 2010

R T

Mkr1 2.483 50 GHz
56.23 dB μ V

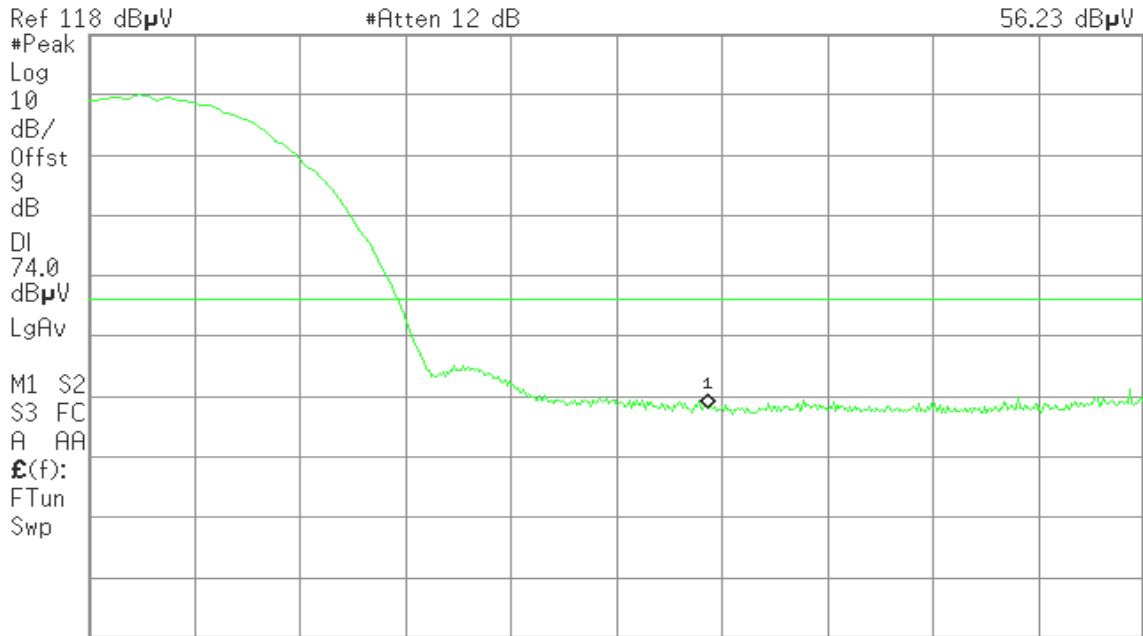

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Vertical

Agilent 19:43:05 Apr 2, 2010

R T

Mkr1 2.483 50 GHz
44.00 dB μ V



Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 19:51:05 Apr 2, 2010

R T

Mkr1 2.483 50 GHz
55.87 dBμV

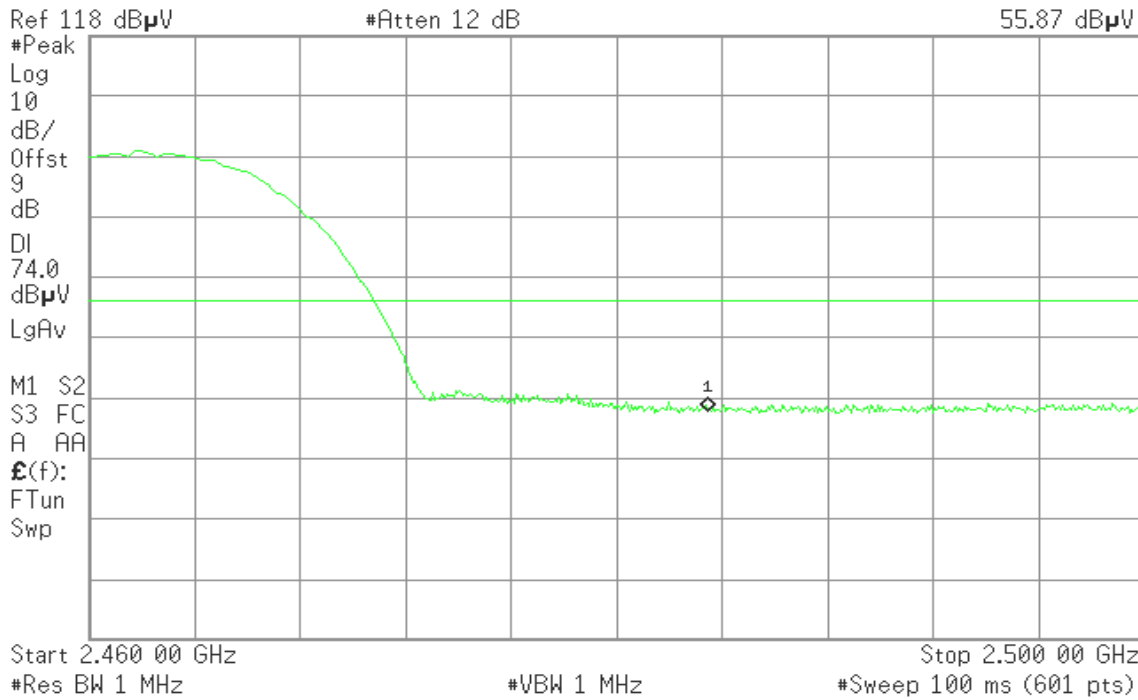


Detector mode: Average

Polarity: Horizontal

Agilent 19:52:13 Apr 2, 2010

R T

Mkr1 2.483 50 GHz
43.54 dBμV

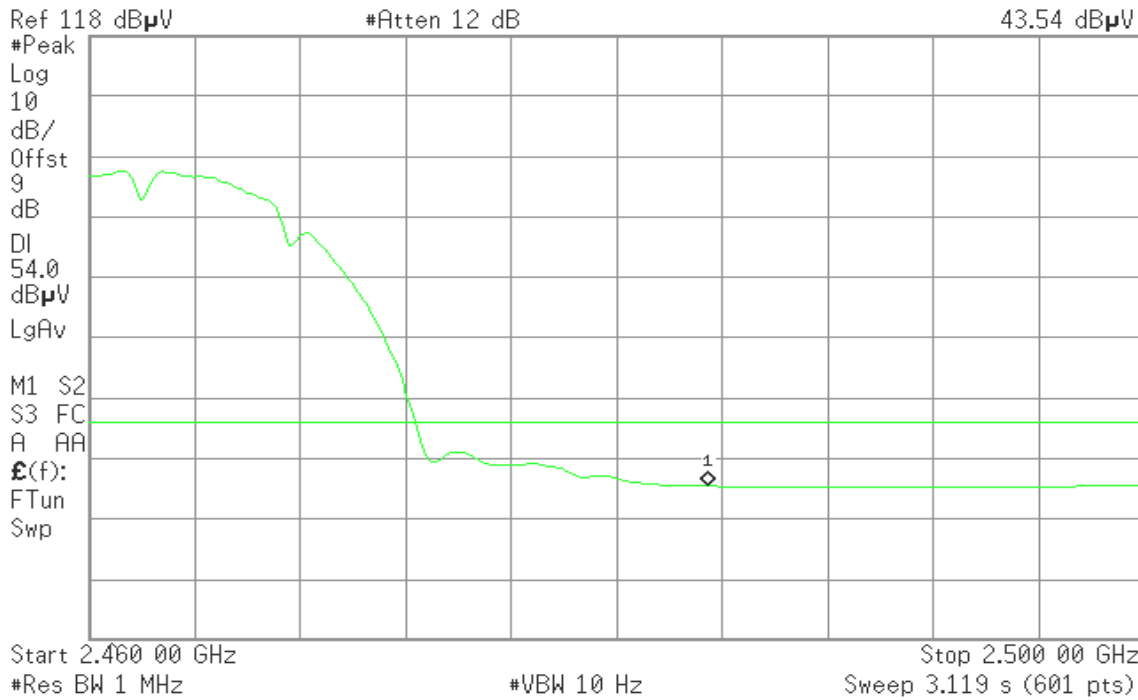



Band Edges (IEEE 802.11g mode / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 20:11:12 Apr 2, 2010

R T

Mkr1 2.390 0 GHz
56.36 dB μ V

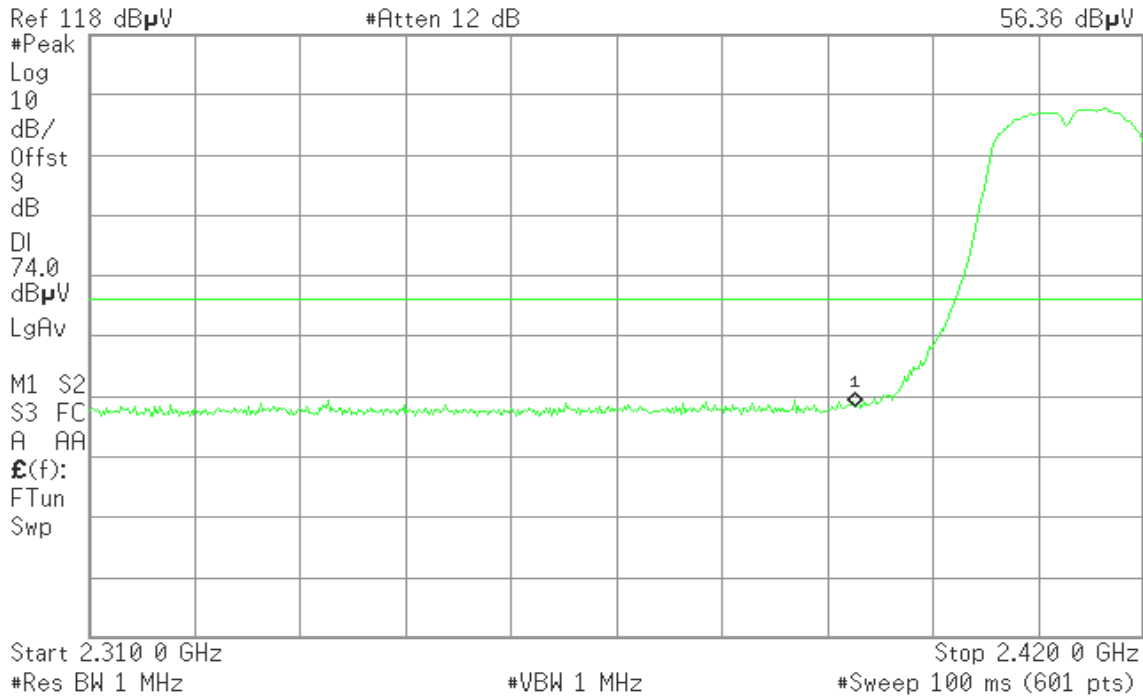


Detector mode: Average

Polarity: Vertical

Agilent 20:11:49 Apr 2, 2010

R T

Mkr1 2.390 0 GHz
43.75 dB μ V

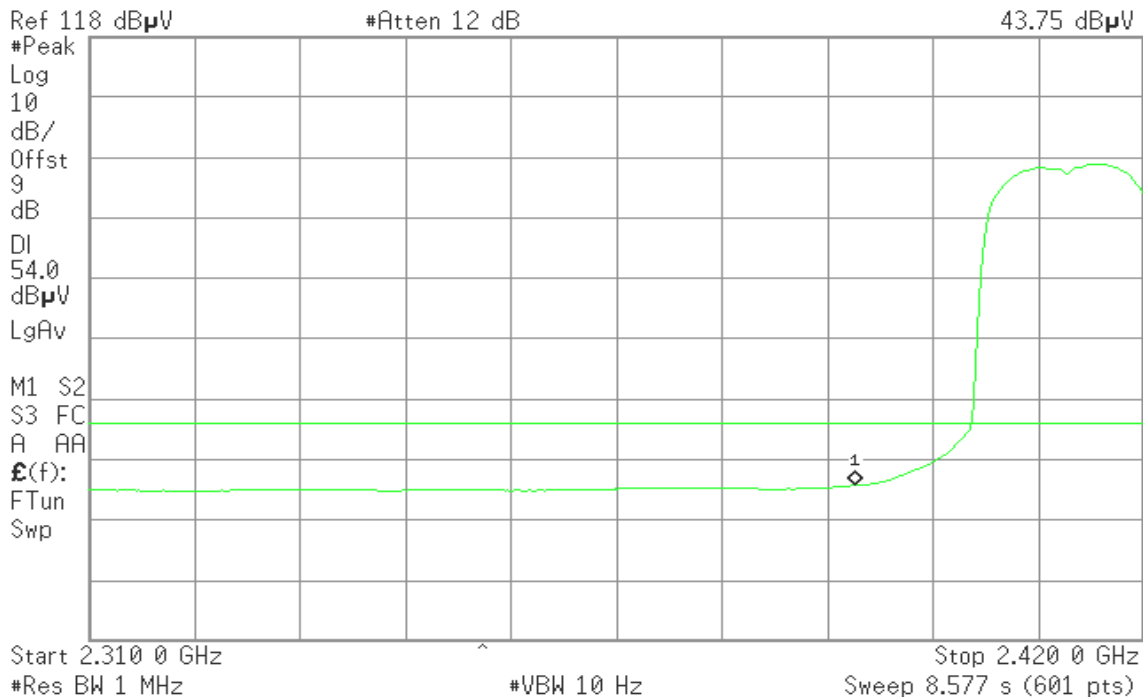




Detector mode: Peak

Polarity: Horizontal

Agilent 20:13:24 Apr 2, 2010

R T

Mkr1 2.390 0 GHz
54.47 dB μ V

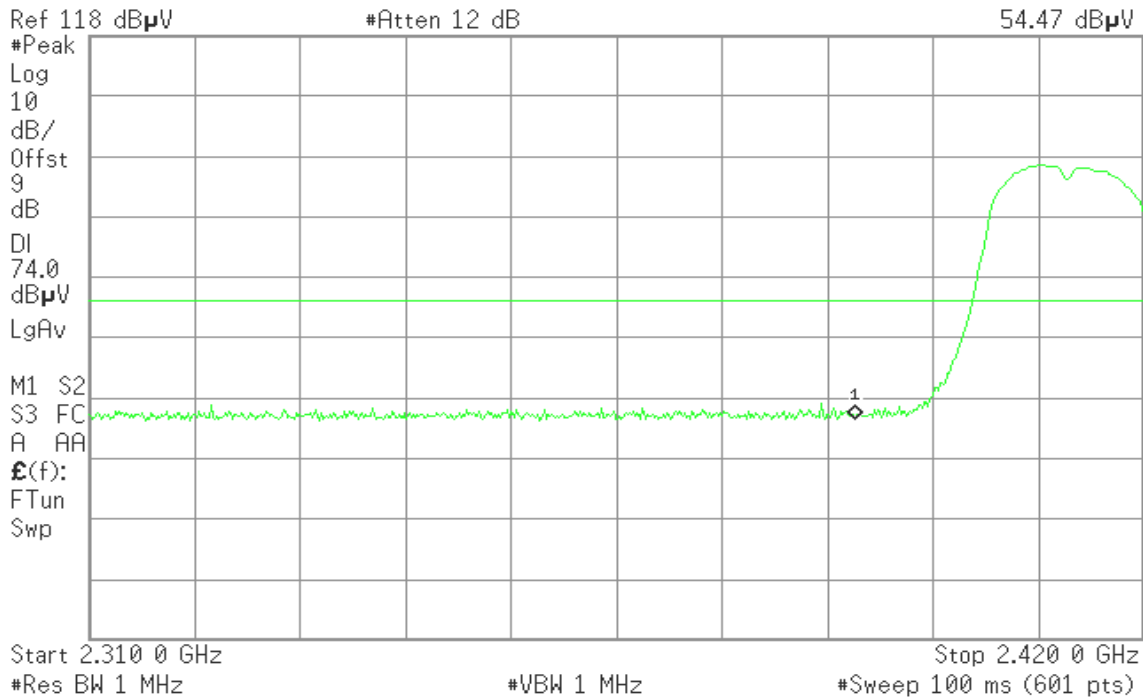


Detector mode: Average

Polarity: Horizontal

Agilent 20:12:49 Apr 2, 2010

R T

Mkr1 2.390 0 GHz
43.05 dB μ V

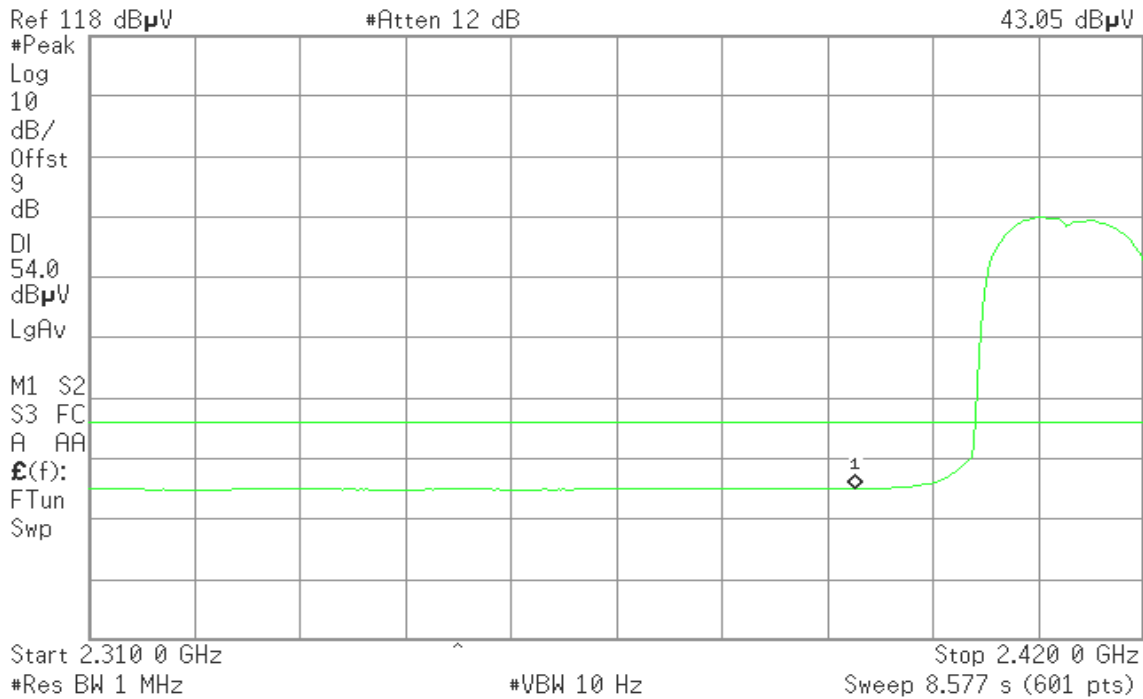



Band Edges (IEEE 802.11g mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 20:32:31 Apr 2, 2010

R T

Mkr1 2.483 50 GHz
56.32 dBμV

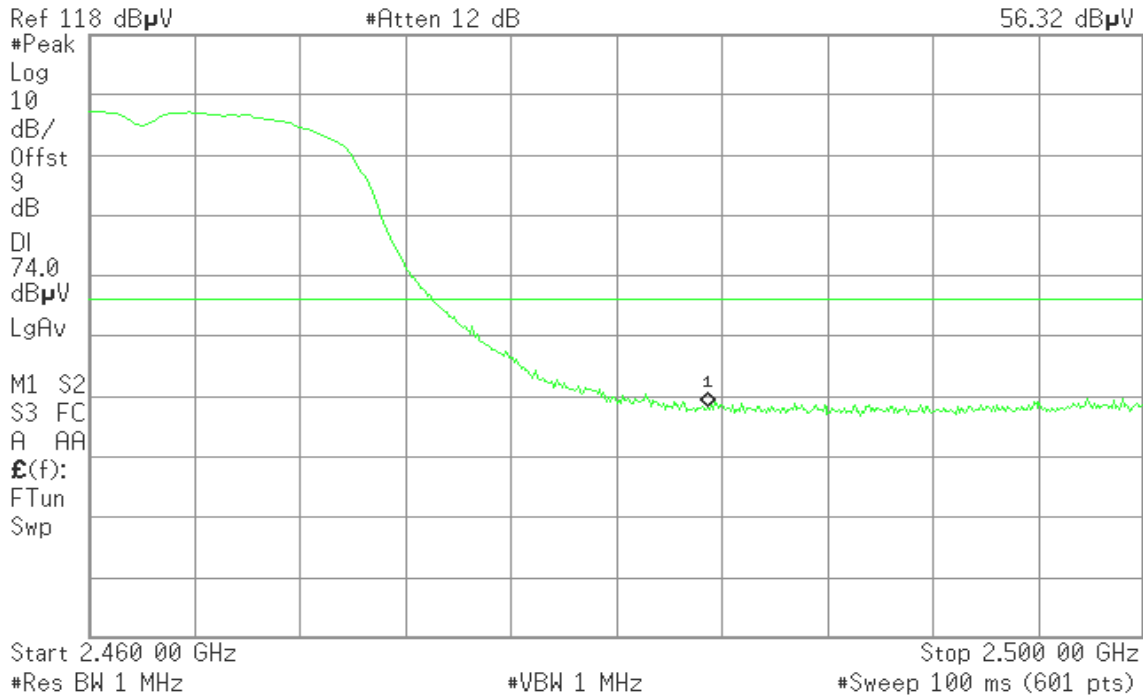


Detector mode: Average

Polarity: Vertical

Agilent 20:33:06 Apr 2, 2010

R T

Mkr1 2.483 50 GHz
43.59 dBμV

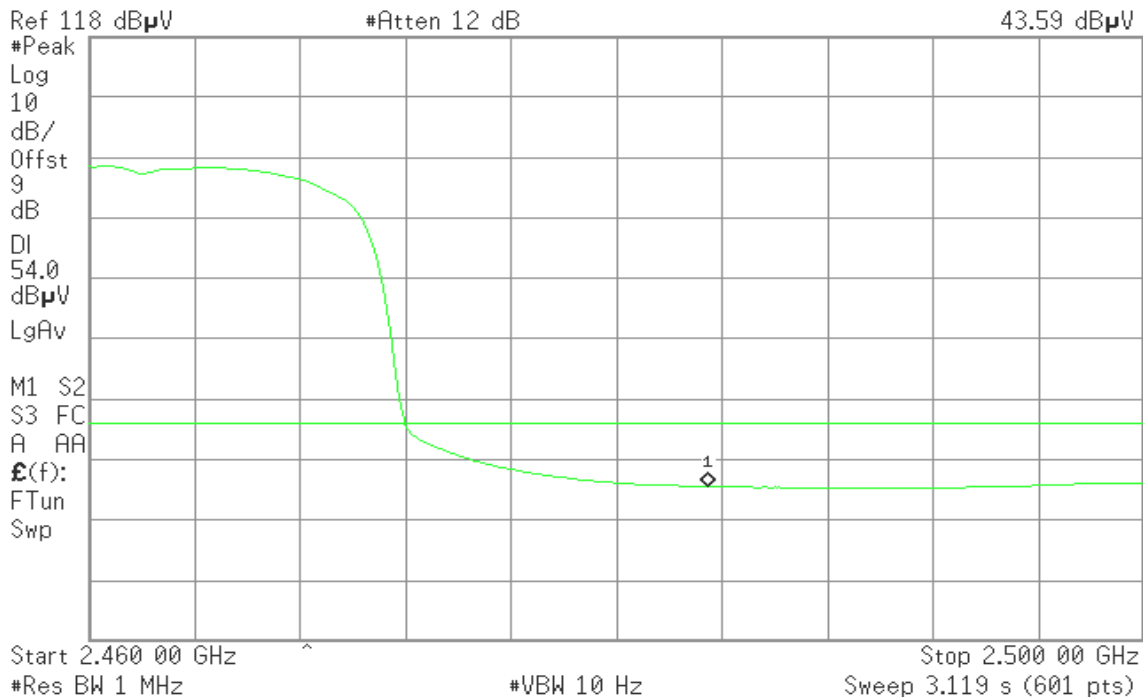




Detector mode: Peak

Polarity: Horizontal

Agilent 20:30:53 Apr 2, 2010

R T

Mkr1 2.483 50 GHz
55.26 dB μ V

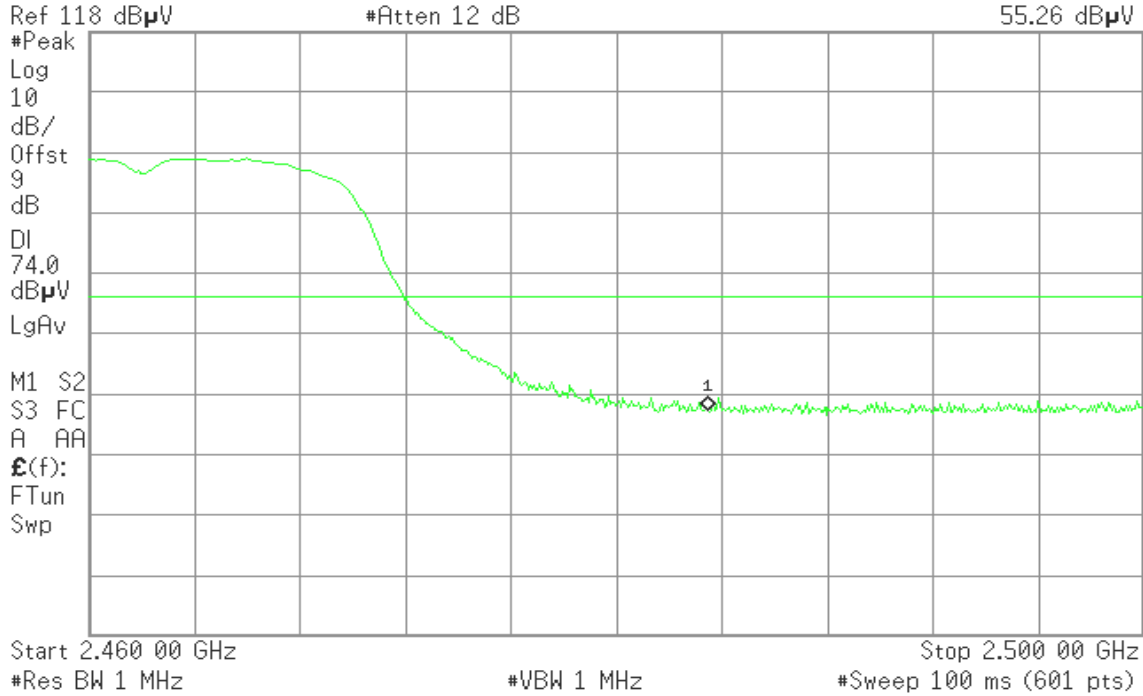


Detector mode: Average

Polarity: Horizontal

Agilent 20:30:14 Apr 2, 2010

R T

Mkr1 2.483 50 GHz
43.41 dB μ V

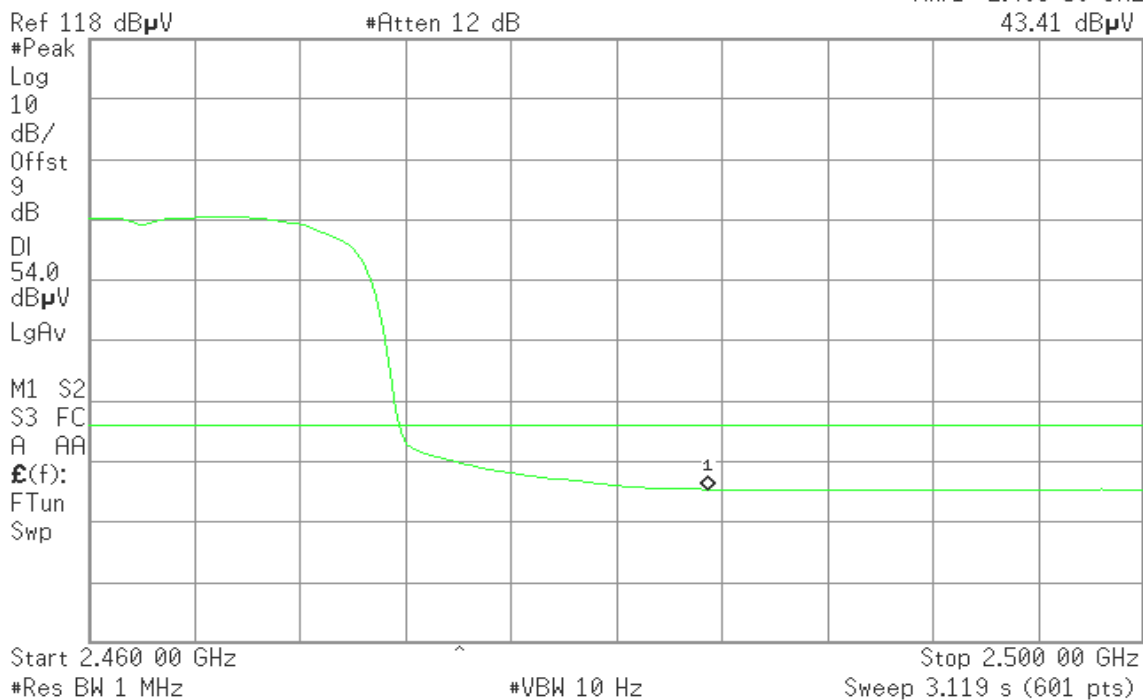



Band Edges (draft 802.11n Standard-20 MHz Channel mode / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 20:19:13 Apr 2, 2010

R T

Mkr1 2.390 0 GHz
55.83 dBμV

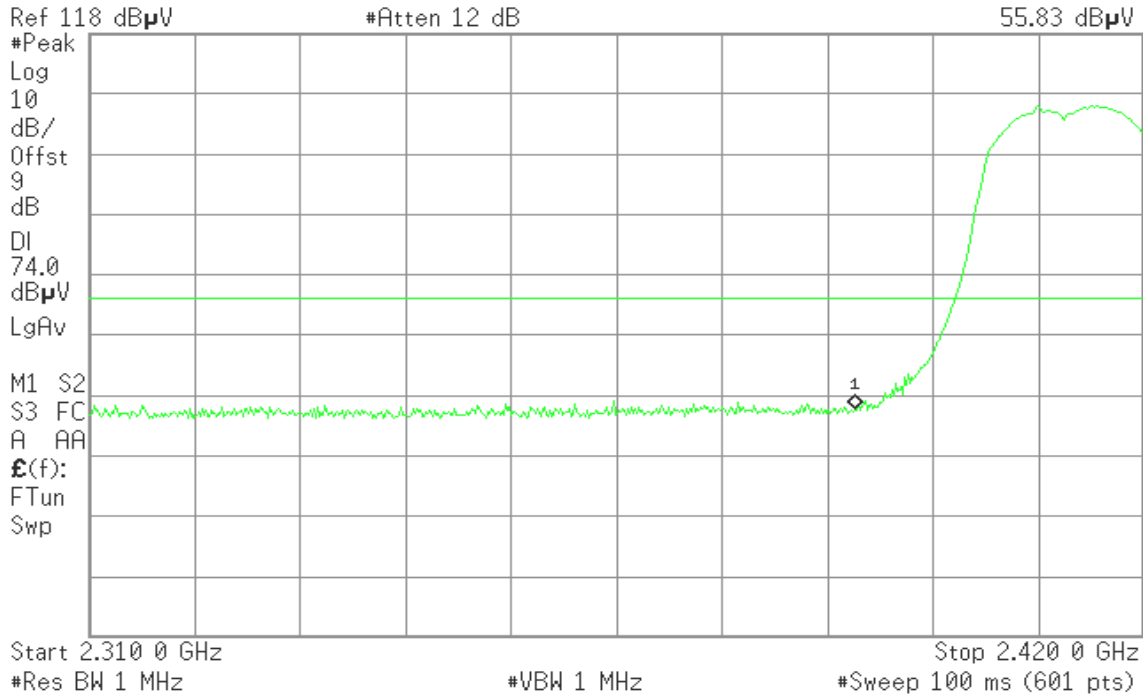


Detector mode: Average

Polarity: Vertical

Agilent 20:18:43 Apr 2, 2010

R T

Mkr1 2.390 0 GHz
43.46 dBμV

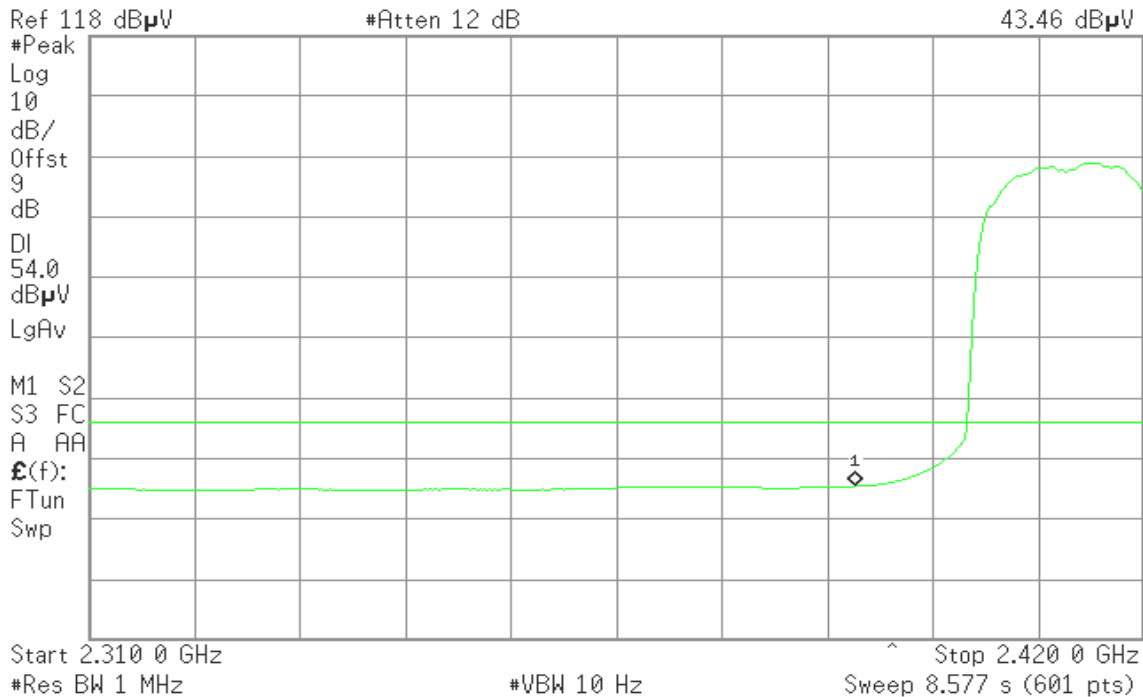




Detector mode: Peak

Polarity: Horizontal

Agilent 20:16:50 Apr 2, 2010

R T

Mkr1 2.390 0 GHz
55.28 dB μ V

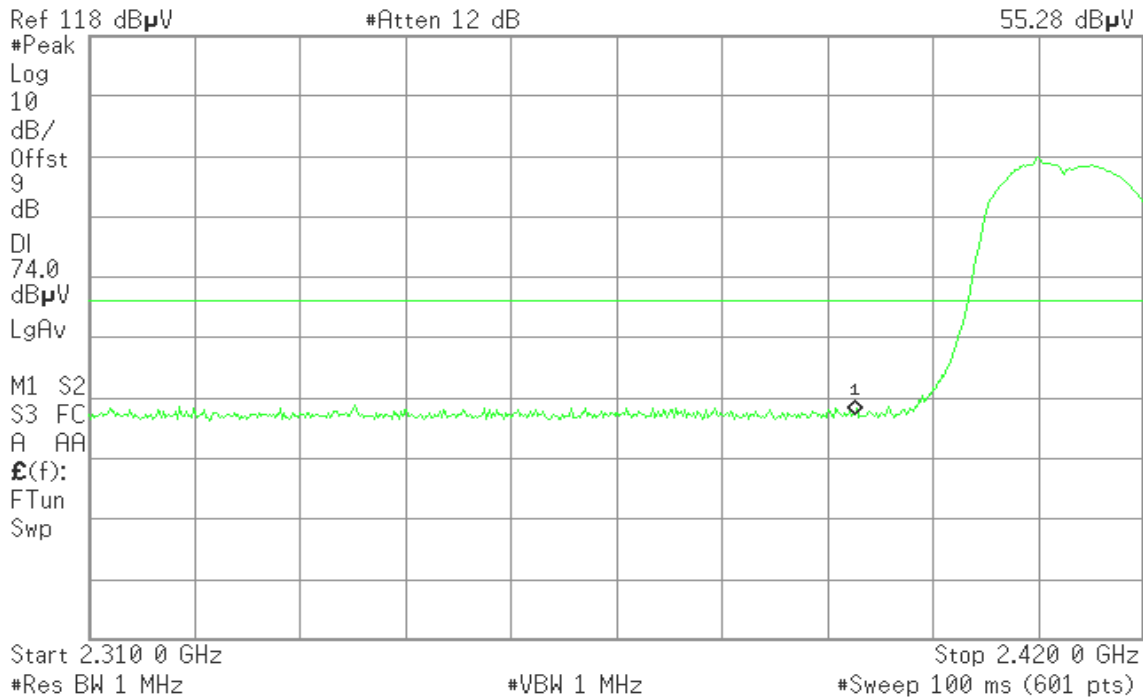


Detector mode: Average

Polarity: Horizontal

Agilent 20:17:34 Apr 2, 2010

R T

Mkr1 2.390 0 GHz
43.08 dB μ V

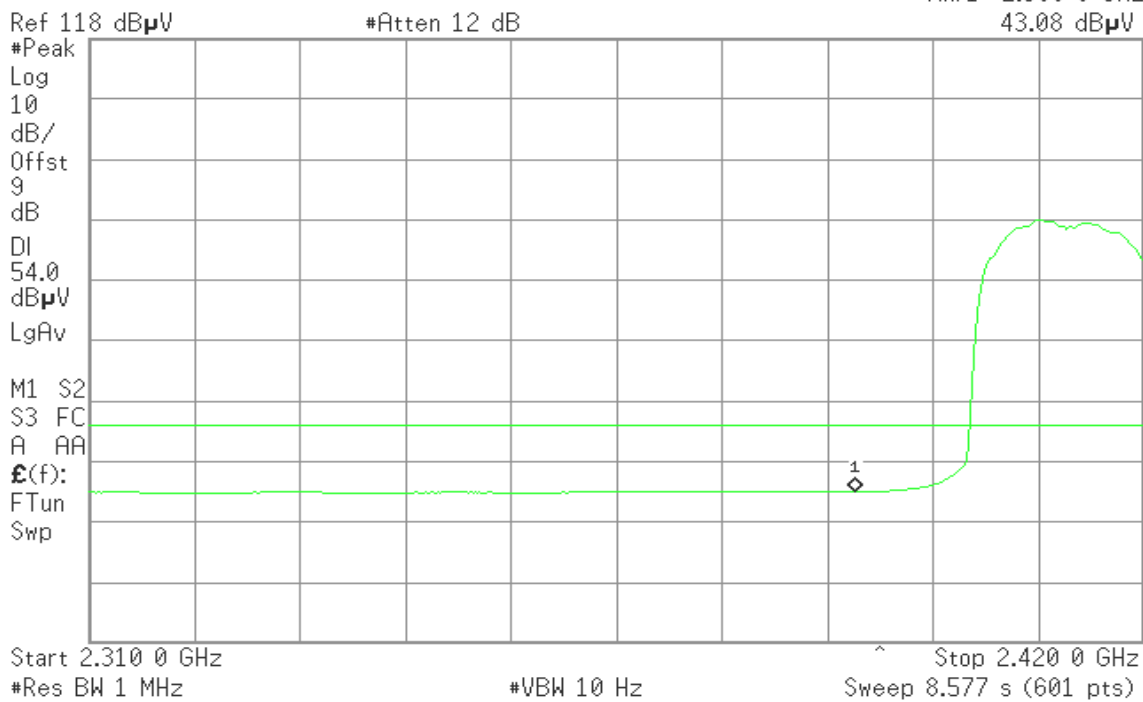



Band Edges (draft 802.11n Standard-20 MHz Channel mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 20:21:53 Apr 2, 2010

R T

Mkr1 2.483 50 GHz
56.67 dB μ V

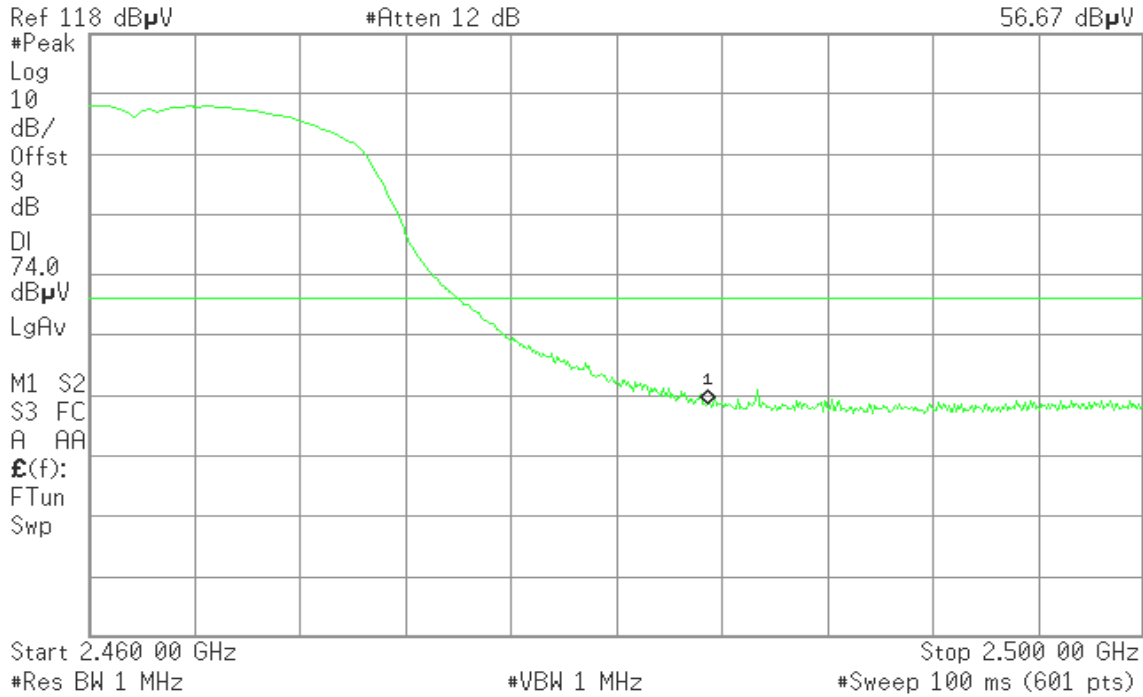


Detector mode: Average

Polarity: Vertical

Agilent 20:22:33 Apr 2, 2010

R T

Mkr1 2.483 50 GHz
44.10 dB μ V

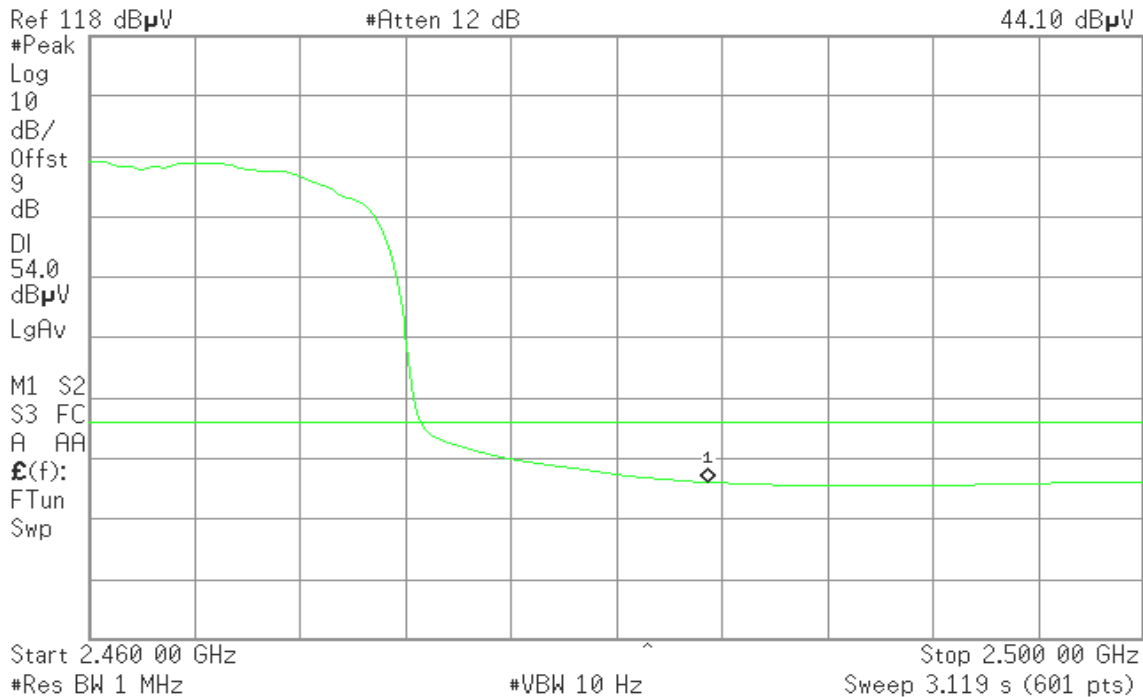




Detector mode: Peak

Polarity: Horizontal

Agilent 20:26:54 Apr 2, 2010

R T

Mkr1 2.483 50 GHz
56.30 dBμV

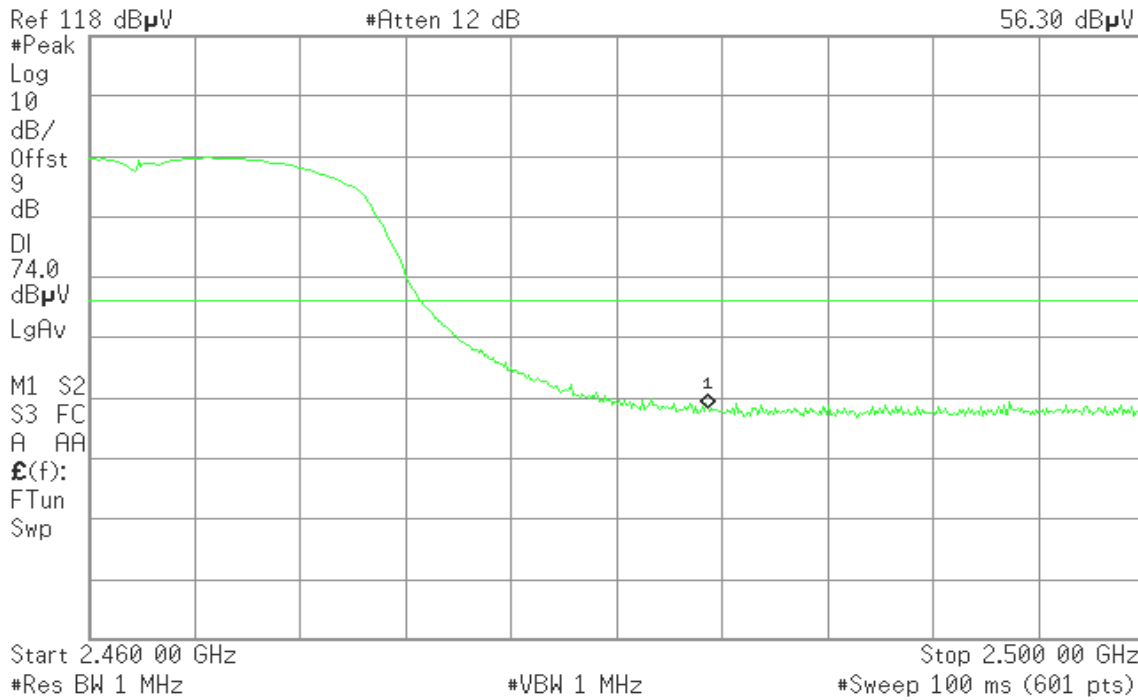


Detector mode: Average

Polarity: Horizontal

Agilent 20:27:28 Apr 2, 2010

R T

Mkr1 2.483 50 GHz
43.47 dBμV

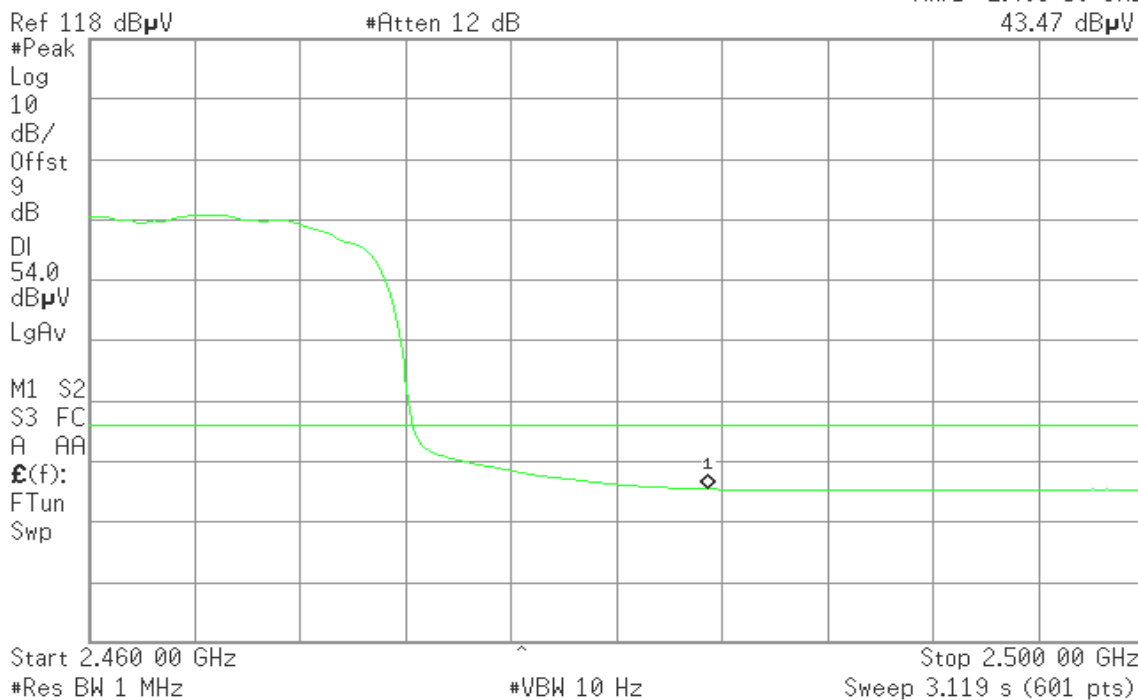



Band Edges (draft 802.11n Wide-40 MHz Channel mode / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 20:47:49 Apr 2, 2010

R T

Mkr1 2.390 0 GHz
59.13 dB μ V

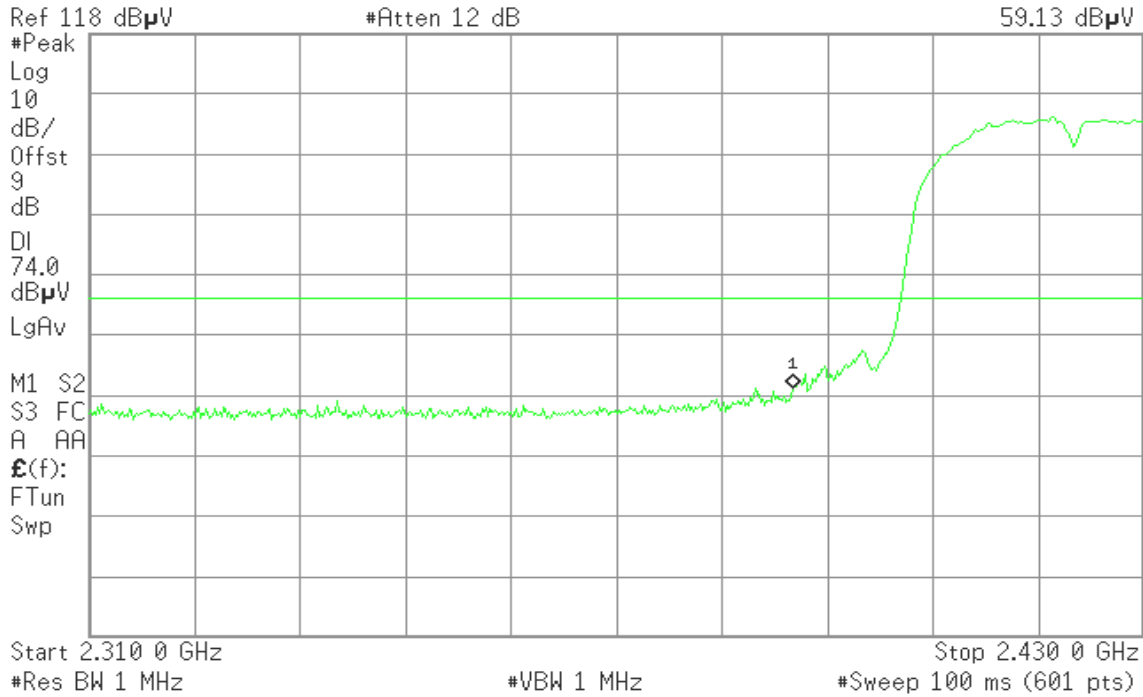


Detector mode: Average

Polarity: Vertical

Agilent 20:47:21 Apr 2, 2010

R T

Mkr1 2.390 0 GHz
44.45 dB μ V

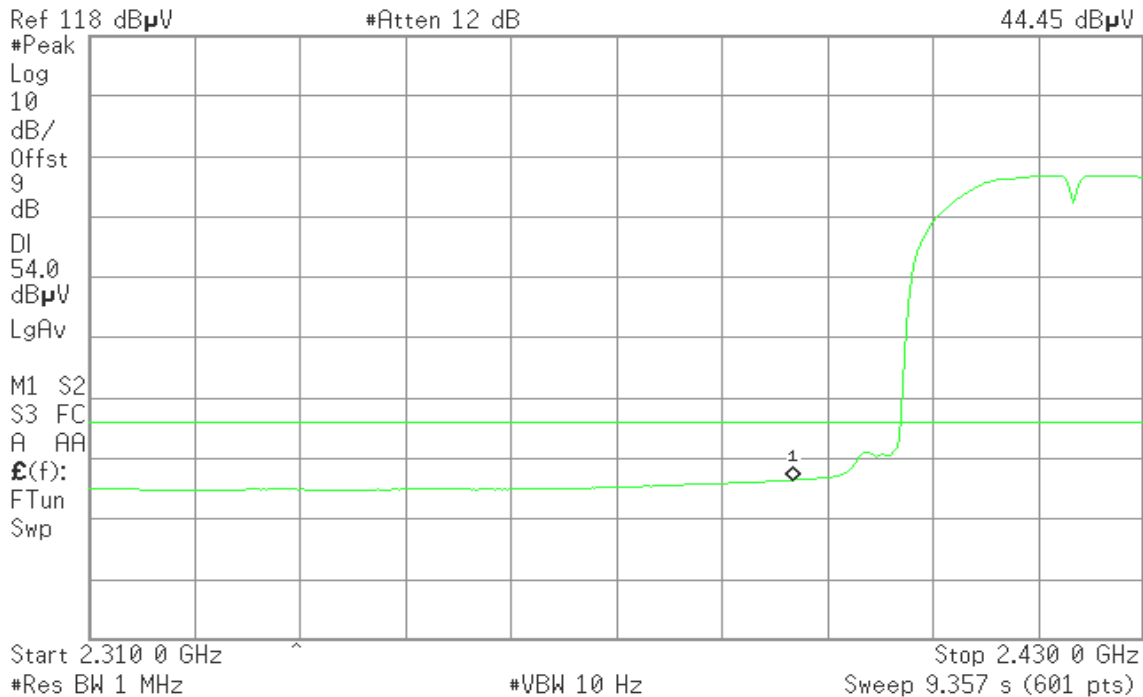




Detector mode: Peak

Polarity: Horizontal

Agilent 20:45:39 Apr 2, 2010

R T

Mkr1 2.390 0 GHz
56.15 dBµV

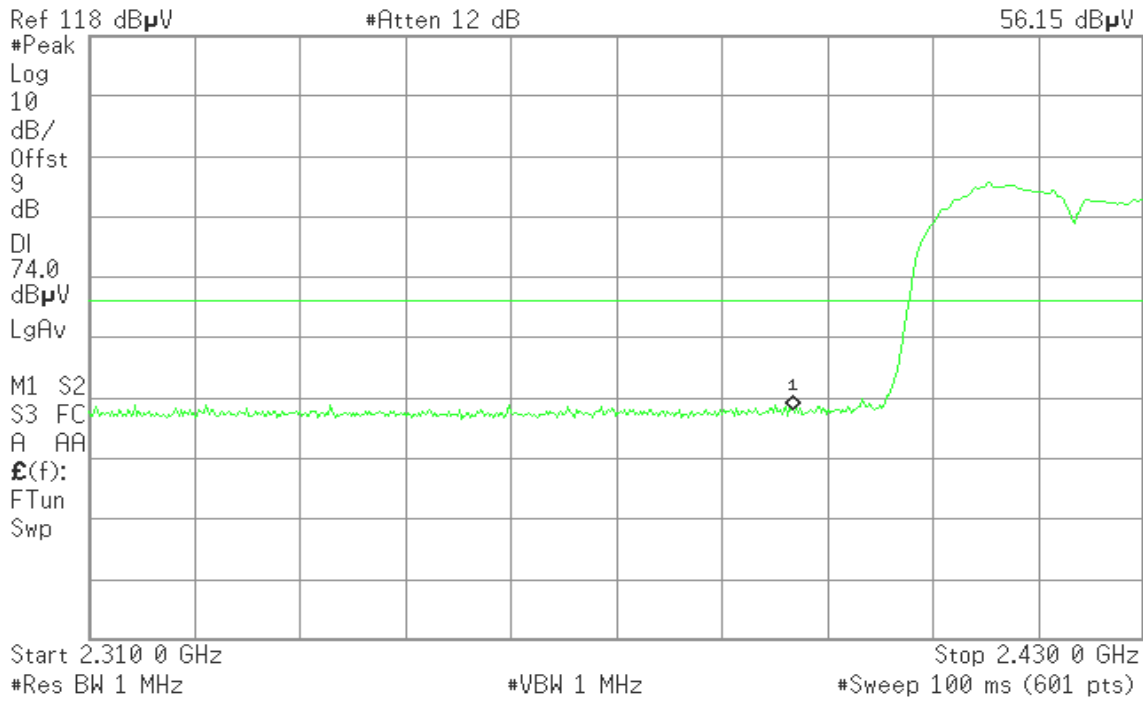


Detector mode: Average

Polarity: Horizontal

Agilent 20:46:05 Apr 2, 2010

R T

Mkr1 2.390 0 GHz
43.23 dBµV

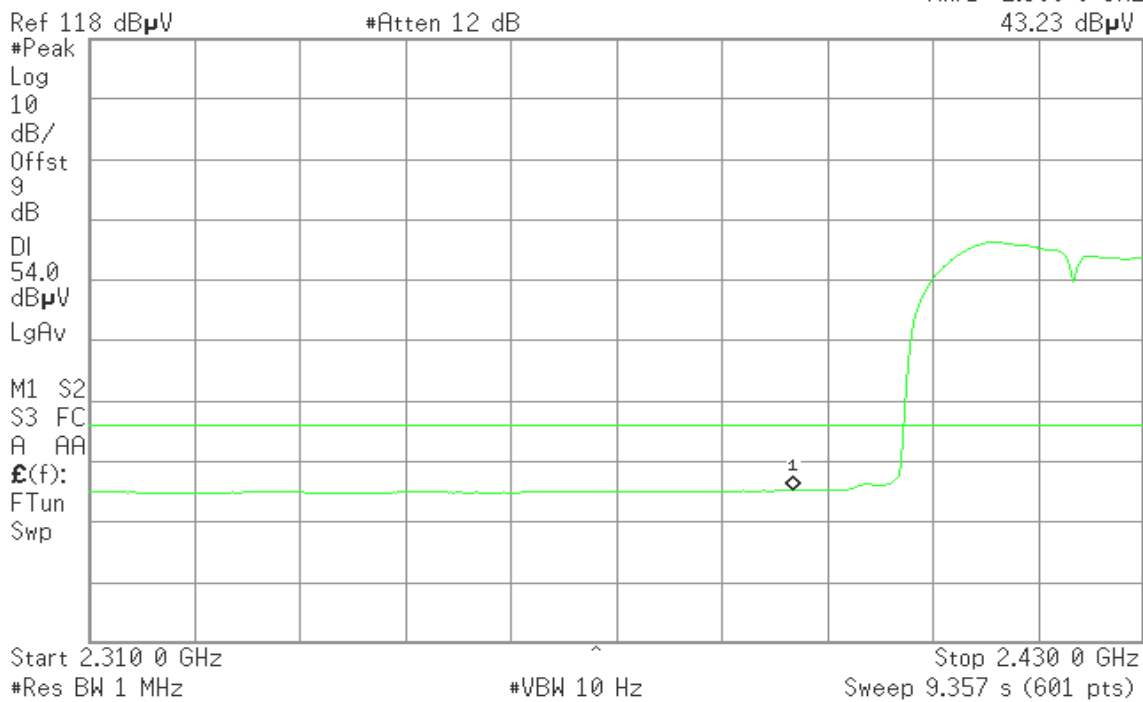



Band Edges (draft 802.11n Wide-40 MHz Channel mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 20:39:49 Apr 2, 2010

R T

Mkr1 2.483 50 GHz
59.83 dB μ V

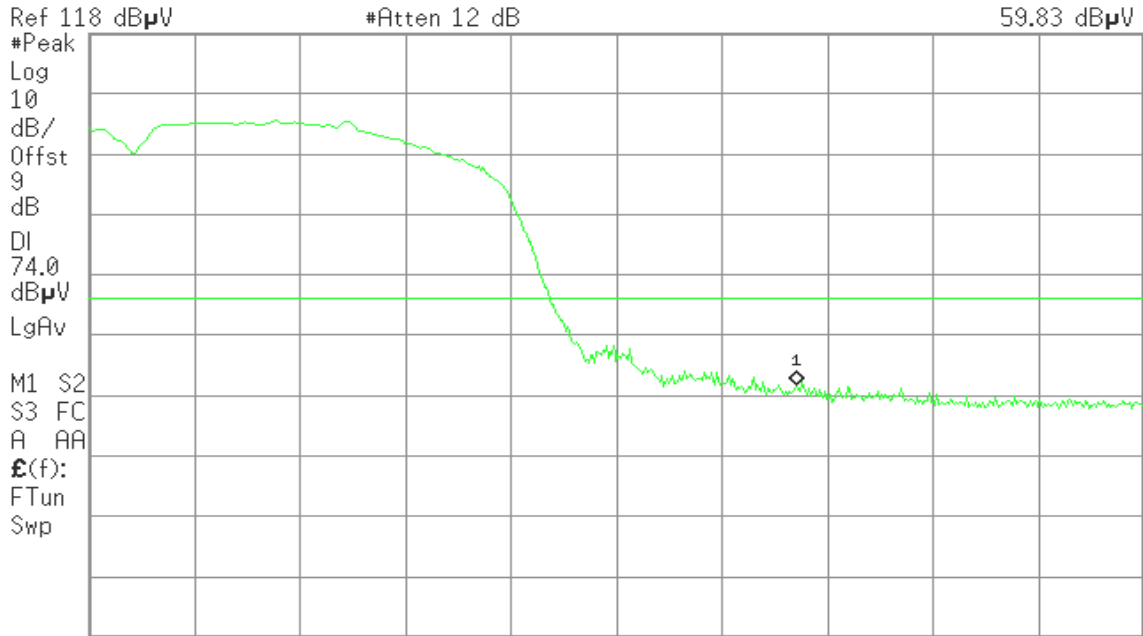


Detector mode: Average

Polarity: Vertical

Agilent 20:40:21 Apr 2, 2010

R T

Mkr1 2.483 50 GHz
44.52 dB μ V

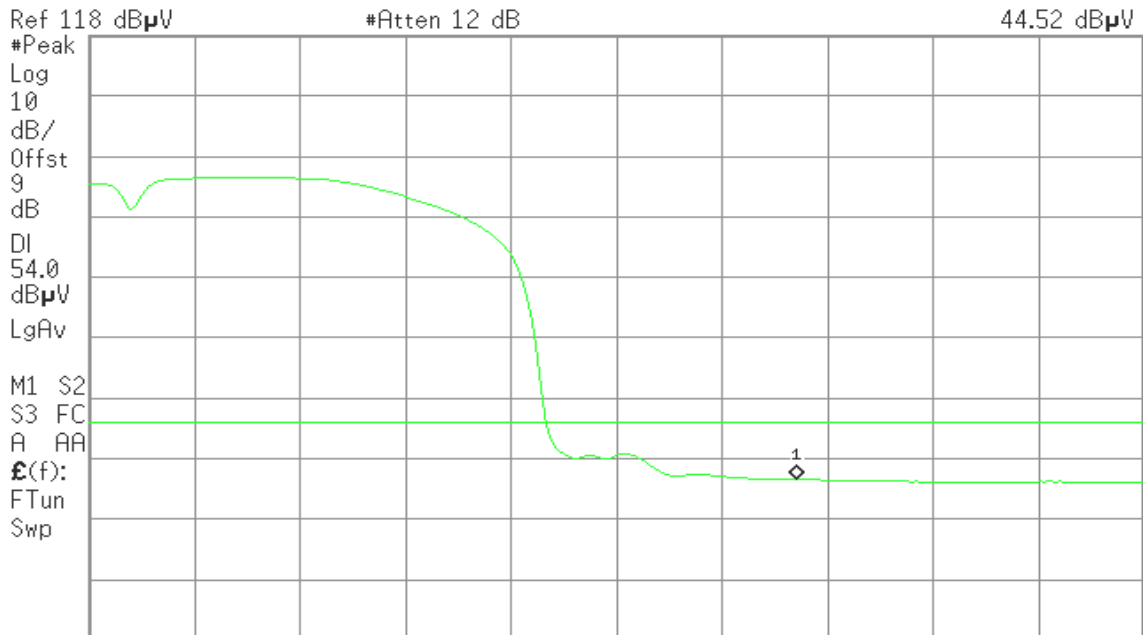




Detector mode: Peak

Polarity: Horizontal

Agilent 20:42:49 Apr 2, 2010

R T

Mkr1 2.483 50 GHz
56.42 dB μ V

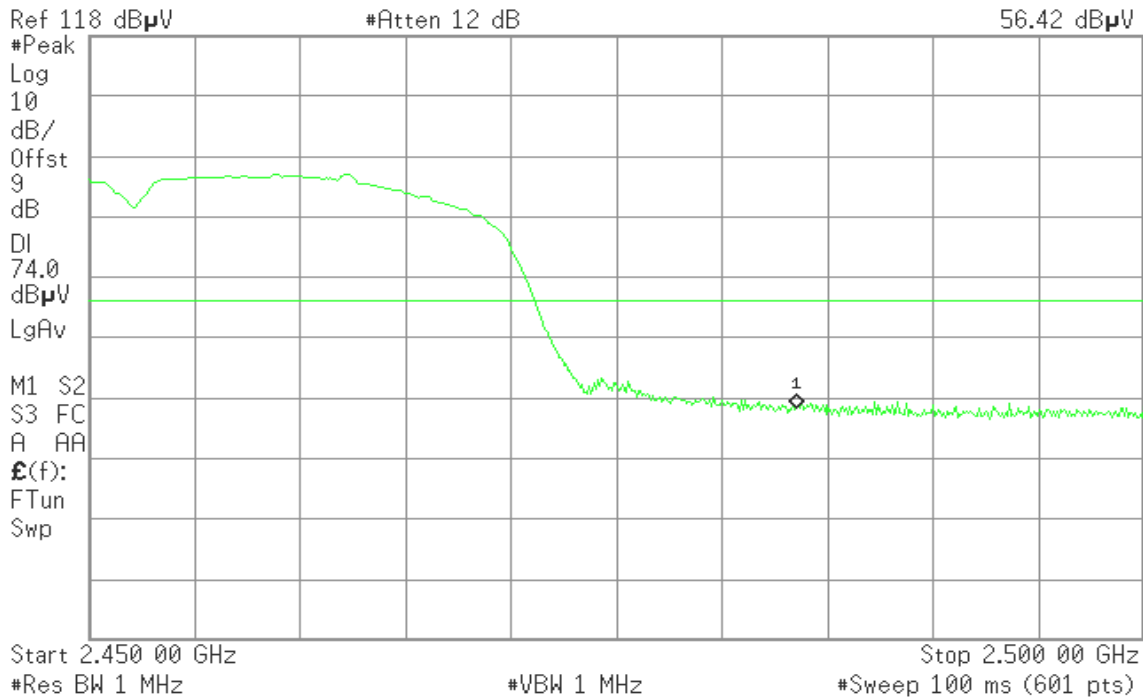


Detector mode: Average

Polarity: Horizontal

Agilent 20:43:13 Apr 2, 2010

R T

Mkr1 2.483 50 GHz
44.24 dB μ V

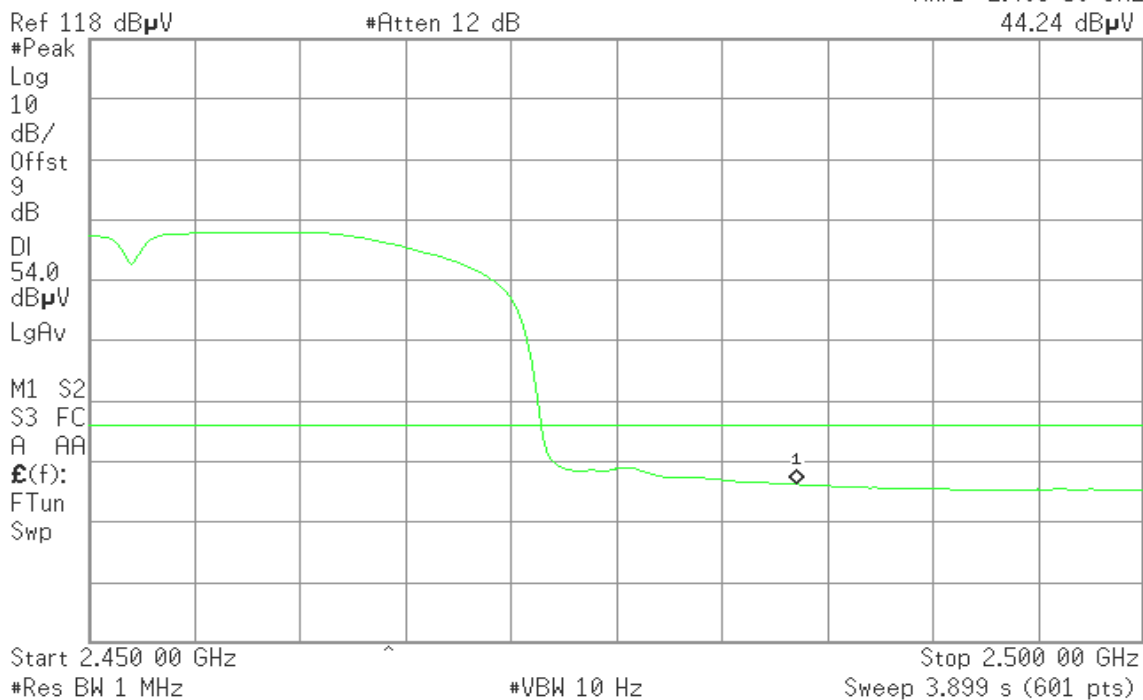


7.5 PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration

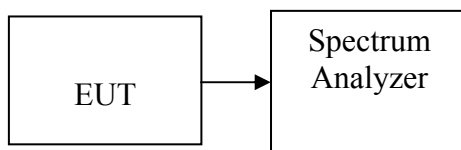

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 300 kHz, Sweep time = 100 s
3. Record the max reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.



TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-13.83	8.00	PASS
Mid	2437	-13.08		PASS
High	2462	-12.57		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-18.48	8.00	PASS
Mid	2437	-18.35		PASS
High	2462	-18.02		PASS

Test mode: draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-20.38	8.00	PASS
Mid	2437	-17.49		PASS
High	2462	-18.17		PASS

Test mode: draft 802.11n Wide-40 MHz Channel mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2422	-17.33	8.00	PASS
Mid	2437	-17.66		PASS
High	2452	-17.67		PASS



Test Plot

IEEE 802.11b mode


PPSD (CH Low)

Agilent 06:08:54 Apr 20, 2010

R T

Mkr1 2.411 299 6 GHz

-13.83 dBm

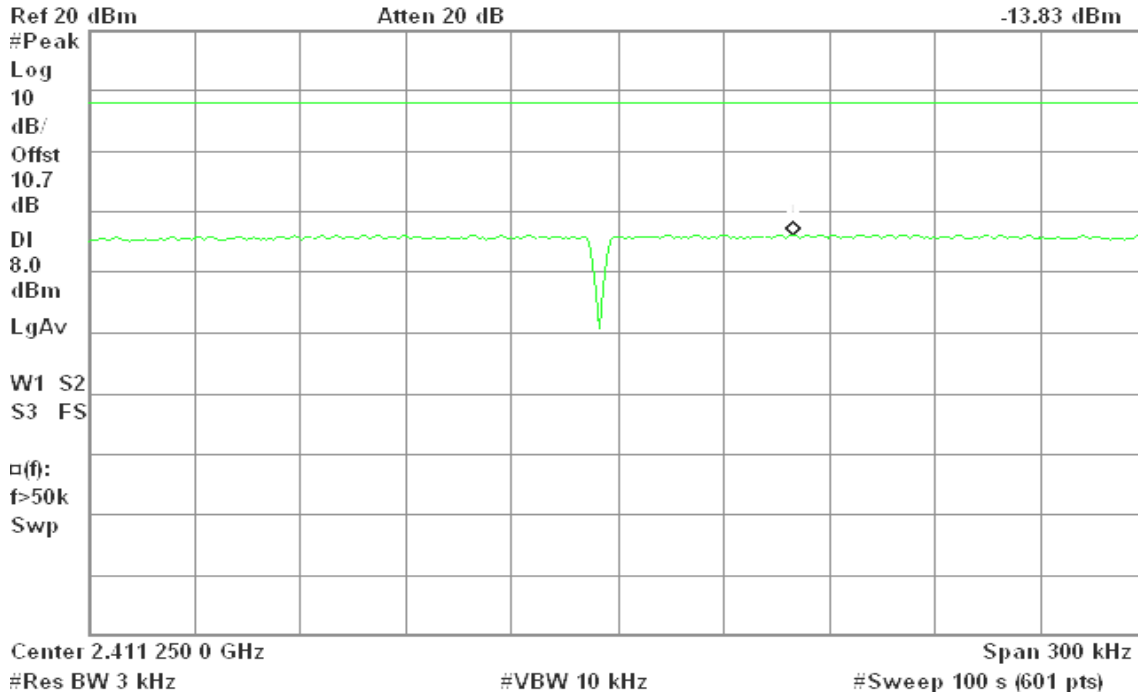


PPSD (CH Mid)

Agilent 06:21:29 Apr 20, 2010

R T

Mkr1 2.437 709 2 GHz

-13.08 dBm

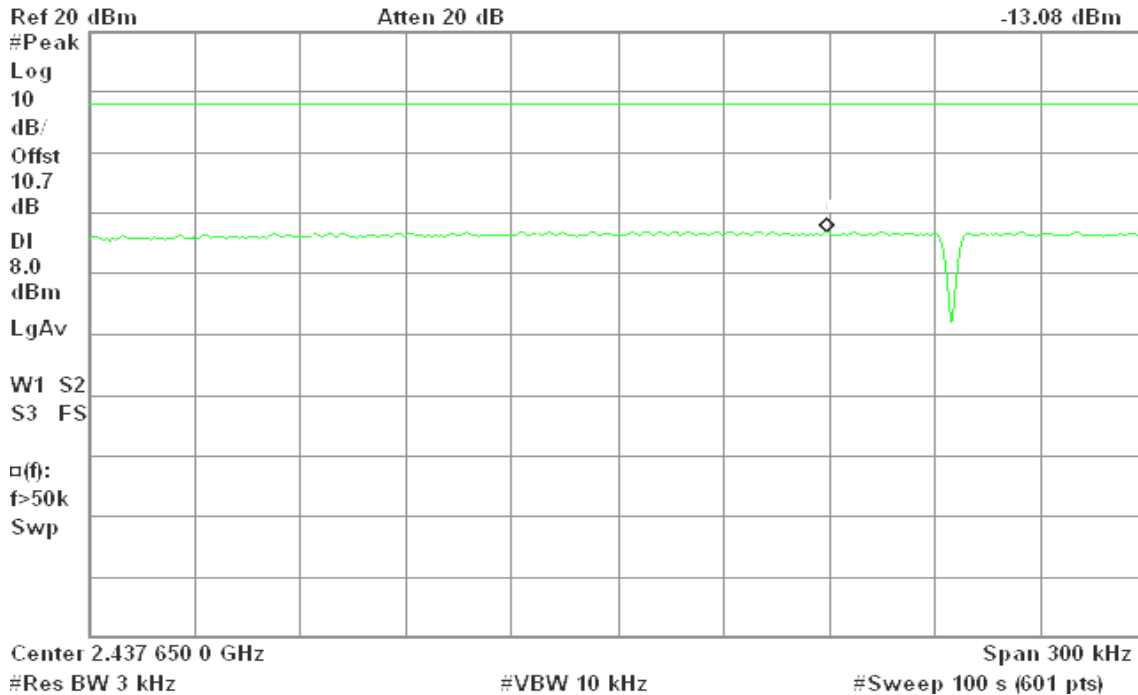




PPSD (CH High)

Agilent 06:26:22 Apr 20, 2010

R T

Mkr1 2.462 689 9 GHz
-12.57 dBm

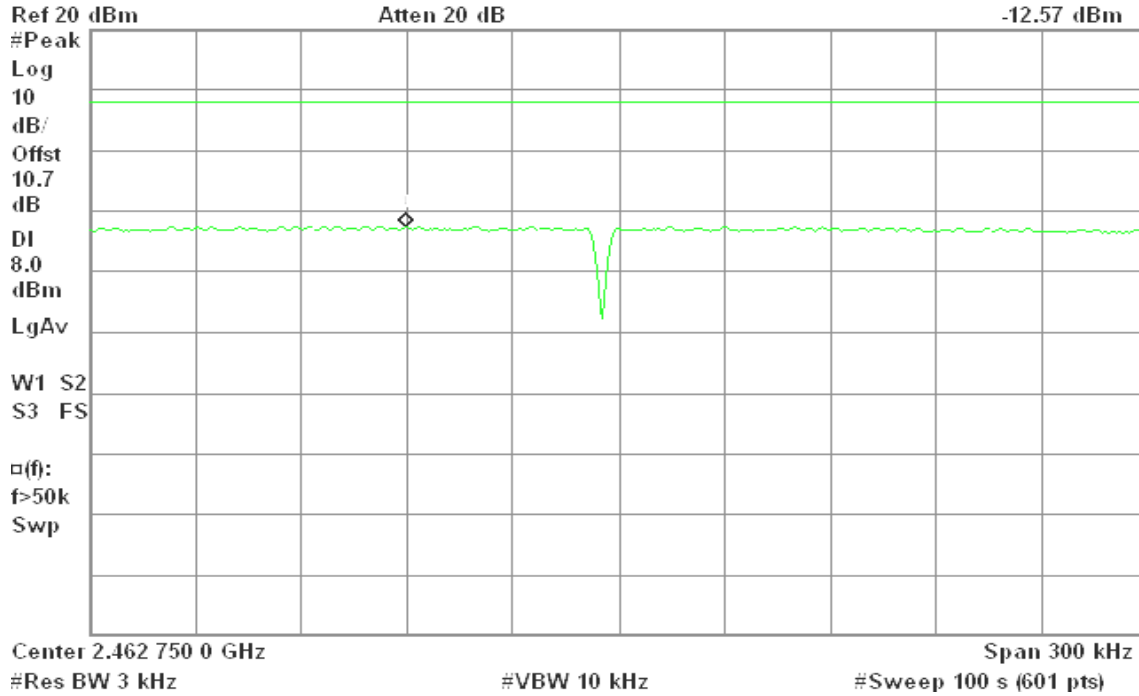


IEEE 802.11g mode

PPSD (CH Low)

Agilent 06:33:40 Apr 20, 2010

R T

Mkr1 2.414 809 5 GHz
-18.48 dBm

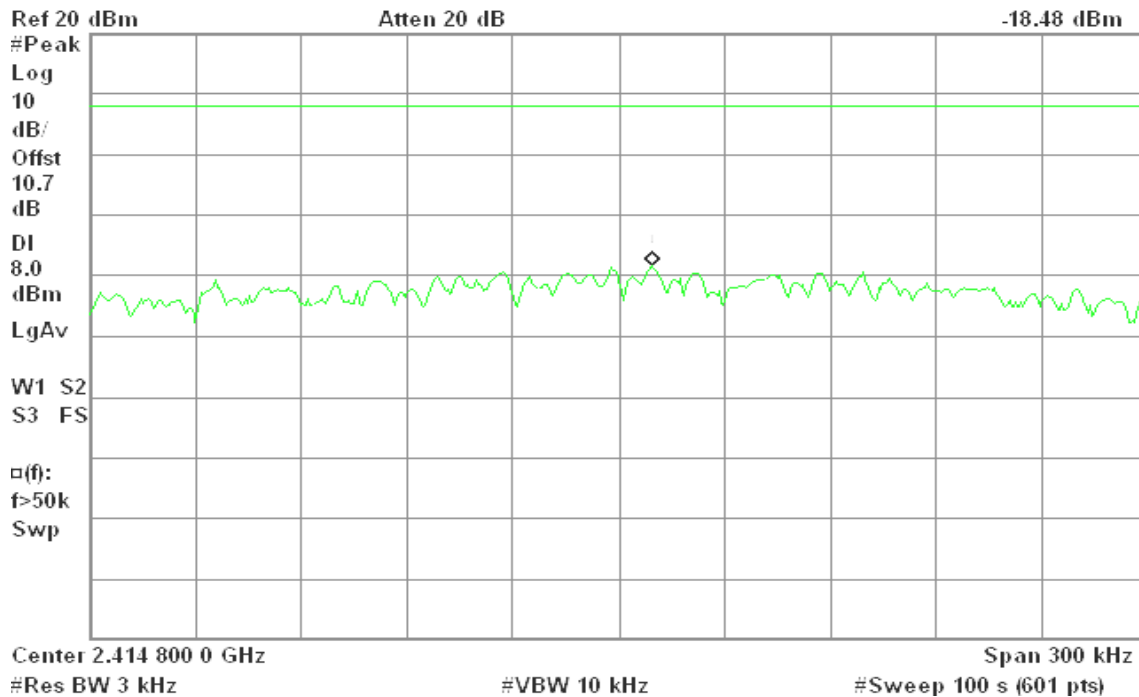




PPSD (CH Mid)

Agilent 06:38:58 Apr 20, 2010

R T

Mkr1 2.436 059 5 GHz
-18.35 dBm

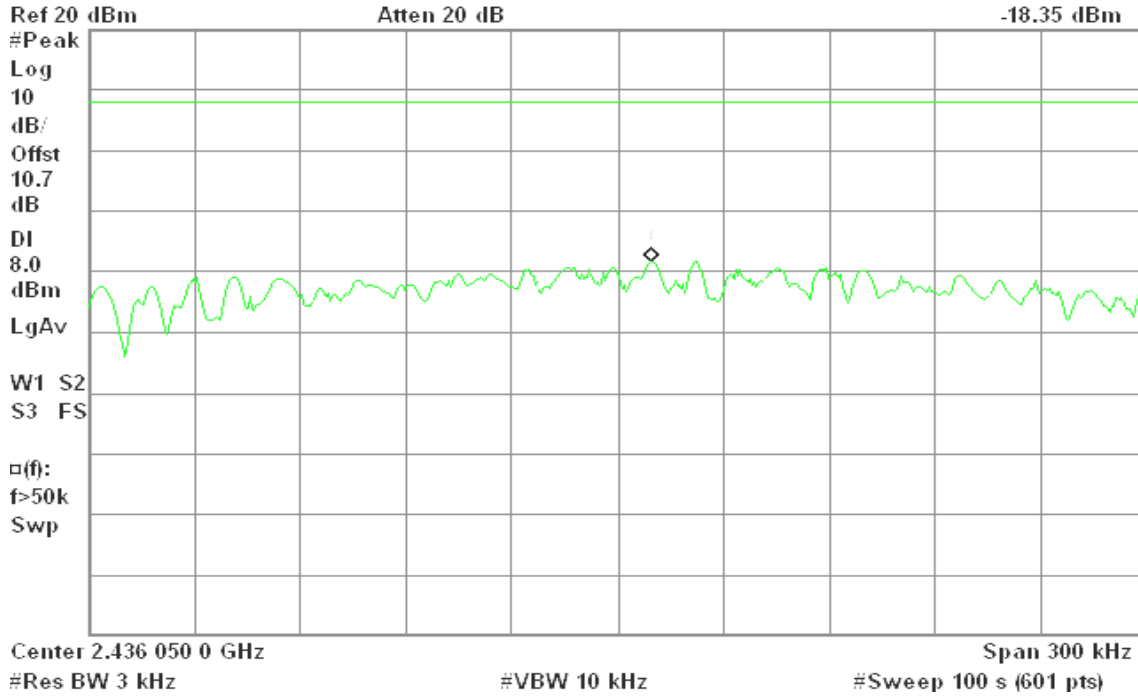


PPSD (CH High)

Agilent 06:47:19 Apr 20, 2010

R T

Mkr1 2.461 060 0 GHz
-18.02 dBm

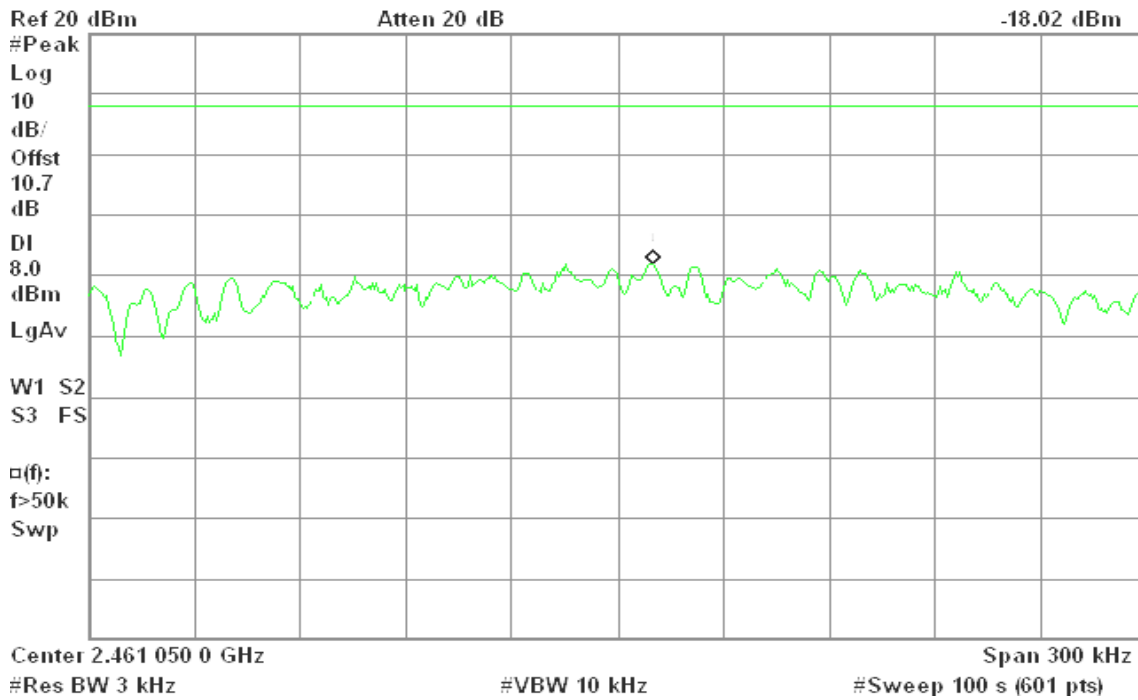




draft 802.11n Standard-20 MHz Channel mode

PPSD (CH Low)

Agilent 06:58:49 Apr 20, 2010

R T

Mkr1 2.414 809 0 GHz
-20.28 dBm

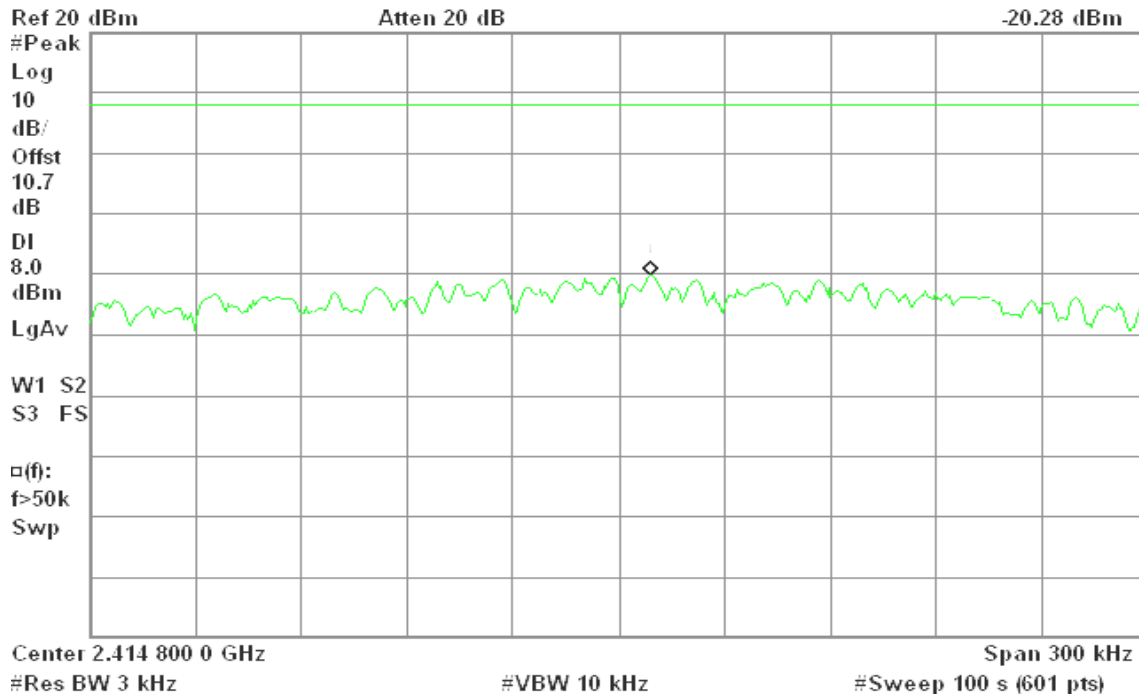


PPSD (CH Mid)

Agilent 07:05:29 Apr 20, 2010

R T

Mkr1 2.439 161 6 GHz
-17.49 dBm

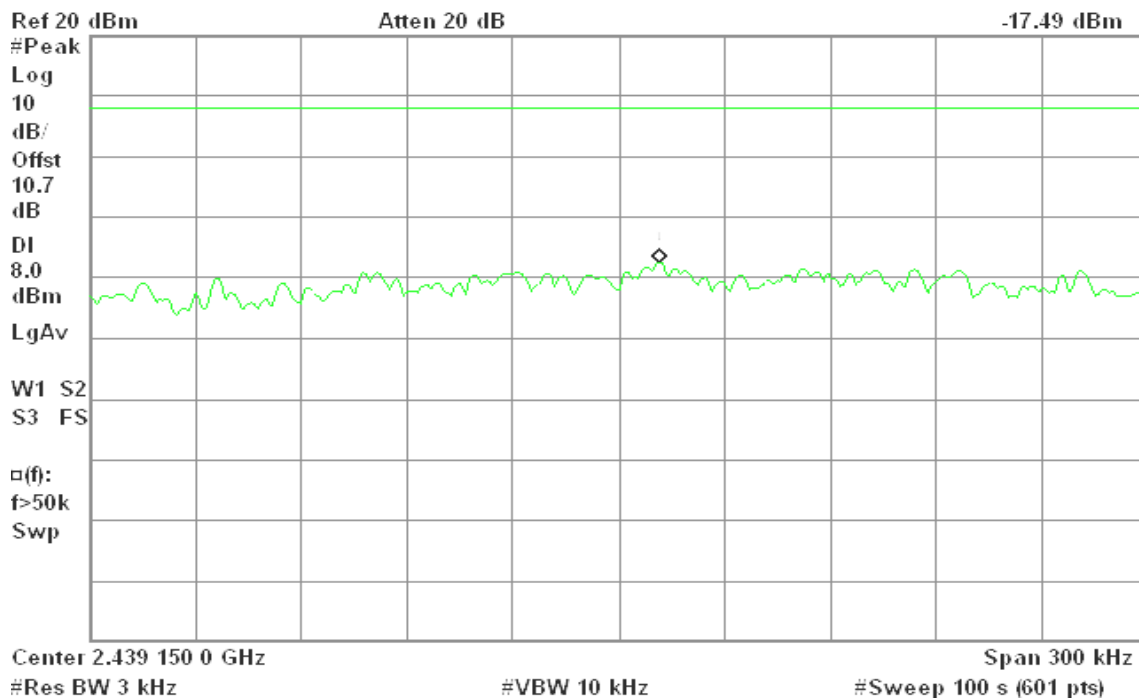




PPSD (CH High)

Agilent 07:10:26 Apr 20, 2010

R L

Mkr1 2.459 765 6 GHz
-18.17 dBm

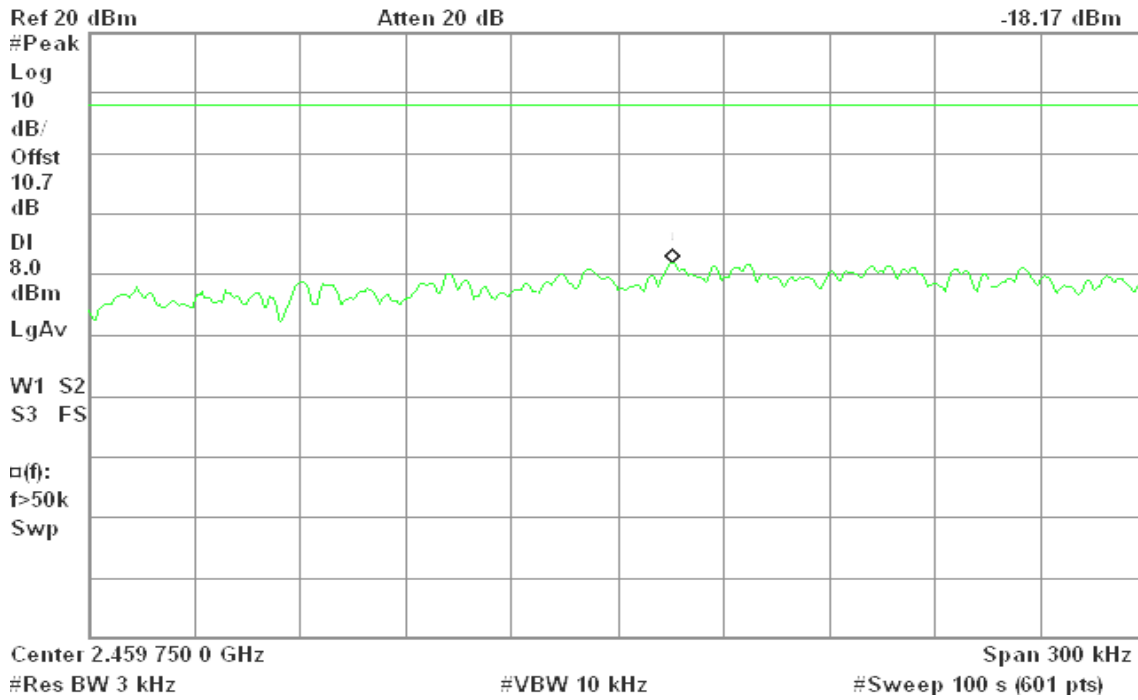


draft 802.11n Wide-40 MHz Channel mode

PPSD (CH Low)

Agilent 07:17:31 Apr 20, 2010

R T

Mkr1 2.429 814 0 GHz
-17.33 dBm

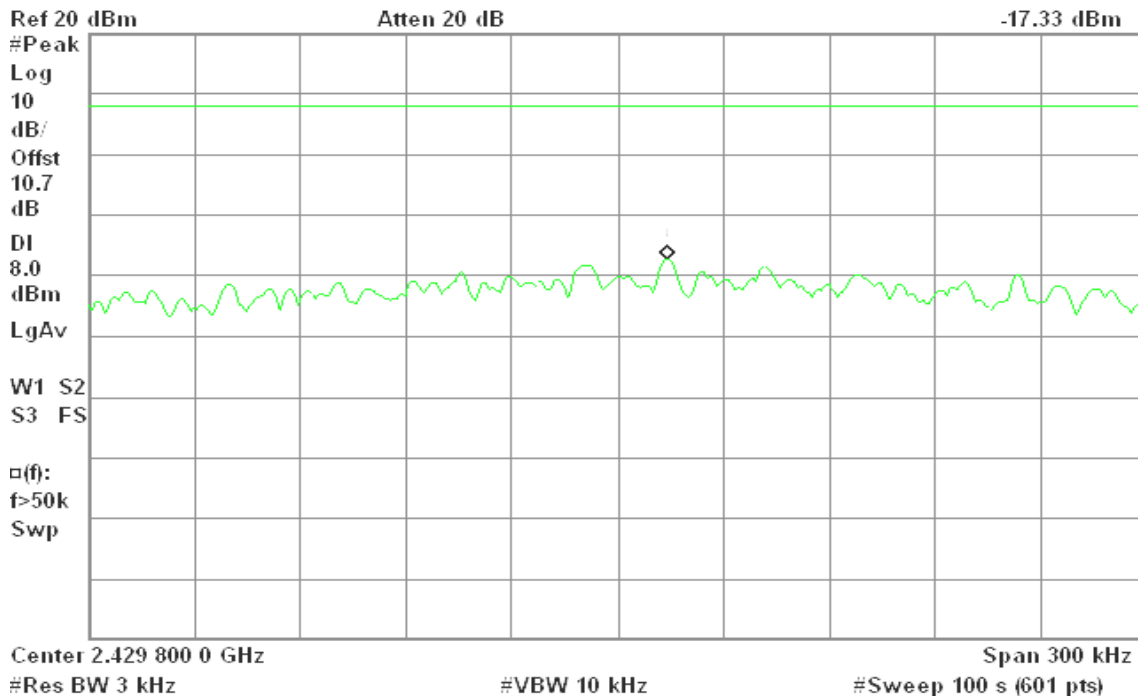




PPSD (CH Mid)

Agilent 07:22:11 Apr 20, 2010

R T

Mkr1 2.444 814 1 GHz
-17.66 dBm

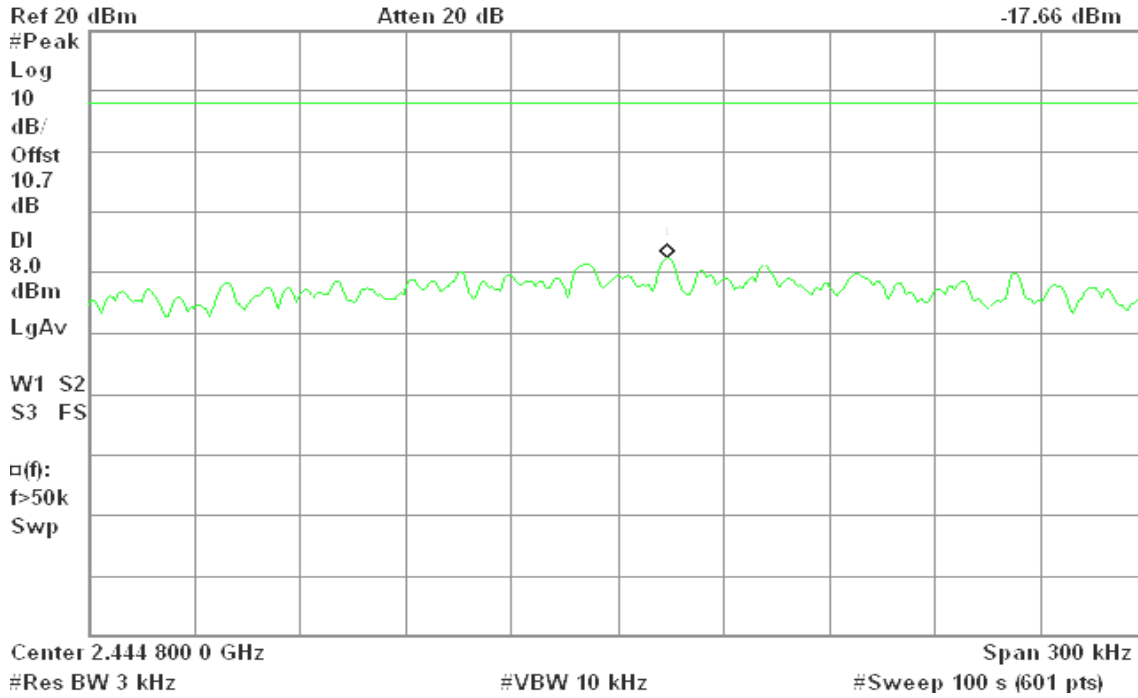


PPSD (CH High)

Agilent 07:28:14 Apr 20, 2010

R T

Mkr1 2.459 814 1 GHz
-17.67 dBm

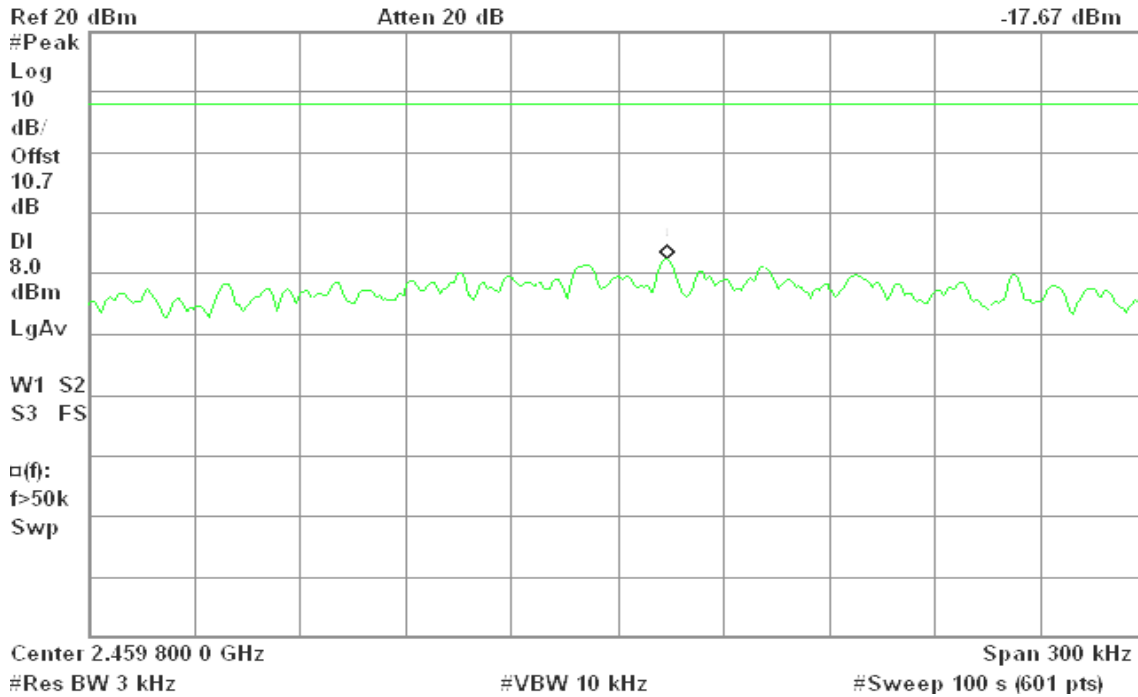


7.6 SPURIOUS EMISSIONS

7.6.1 Conducted Measurement

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted




Test Plot

IEEE 802.11b mode

CH Low

Agilent 06:16:39 Apr 20, 2010


R T

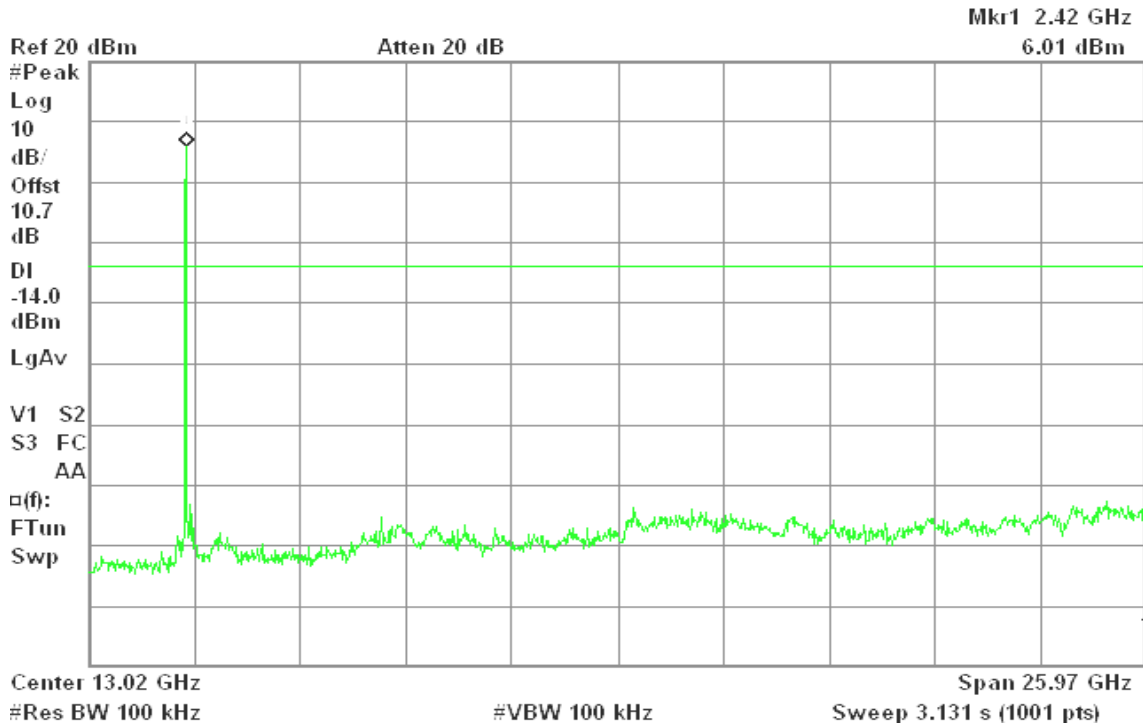

CH Mid

Agilent 06:22:16 Apr 20, 2010

R T

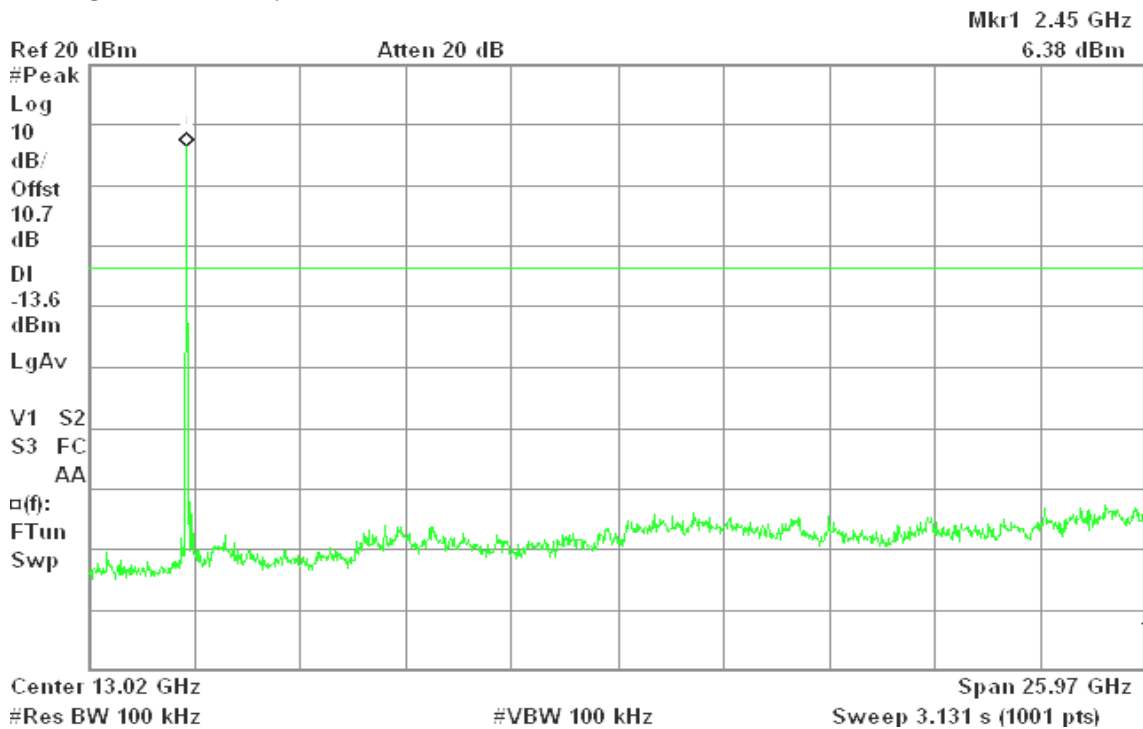




CH High

Agilent 06:28:52 Apr 20, 2010

R T

Mkr1 2.47 GHz
6.88 dBm

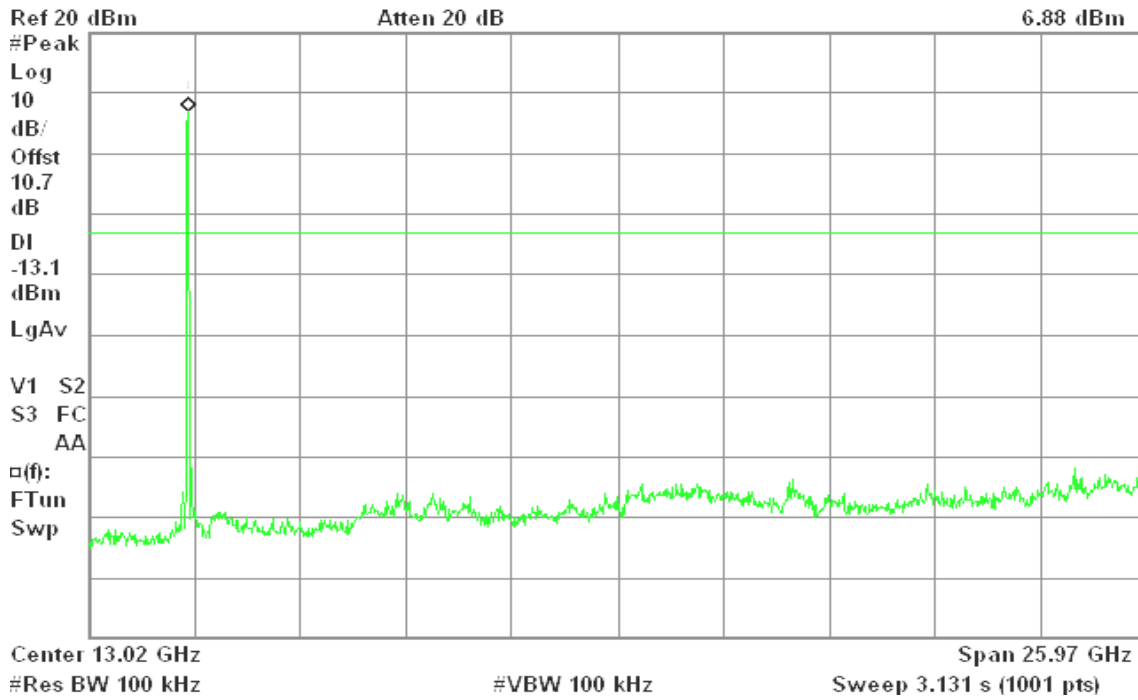


IEEE 802.11g mode

CH Low

Agilent 06:34:32 Apr 20, 2010

R T

Mkr1 2.42 GHz
-4.40 dBm

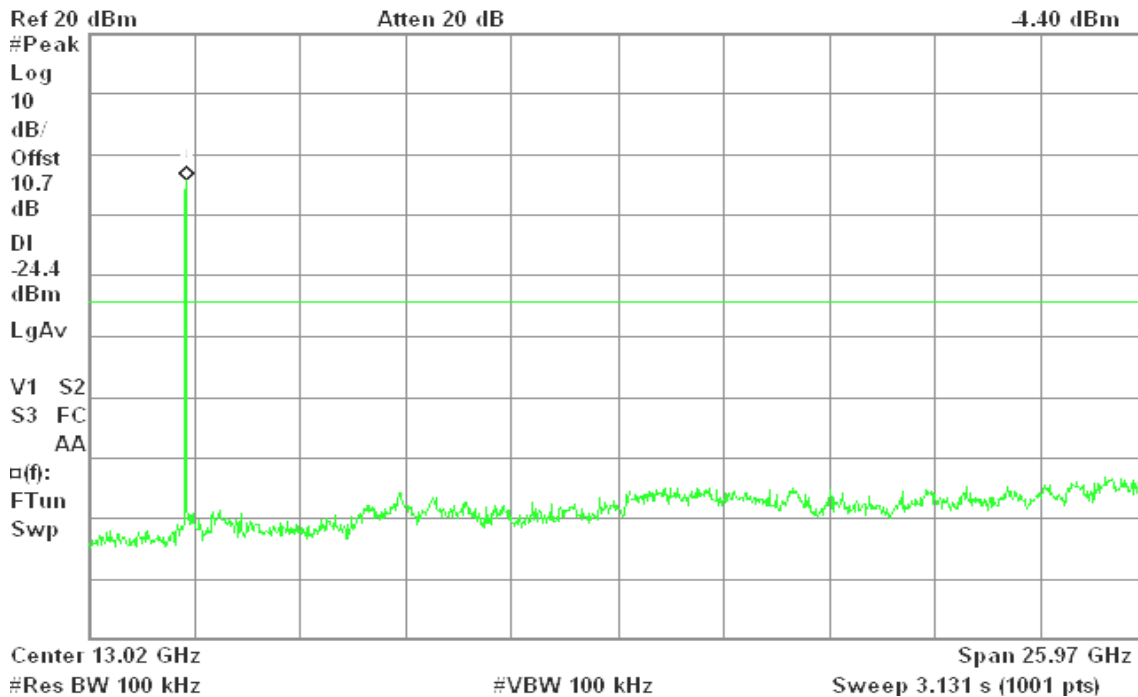




draft 802.11n Standard-20 MHz Channel mode

CH Low

Agilent 06:59:53 Apr 20, 2010


R T

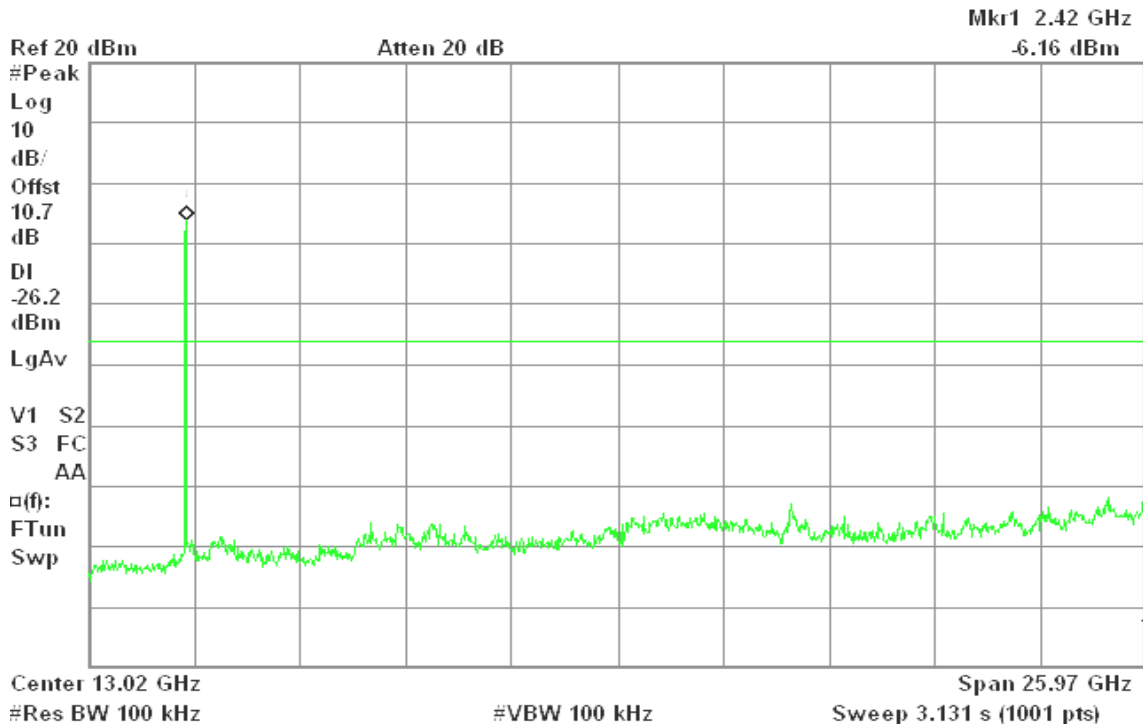

CH Mid

Agilent 07:06:16 Apr 20, 2010

R T

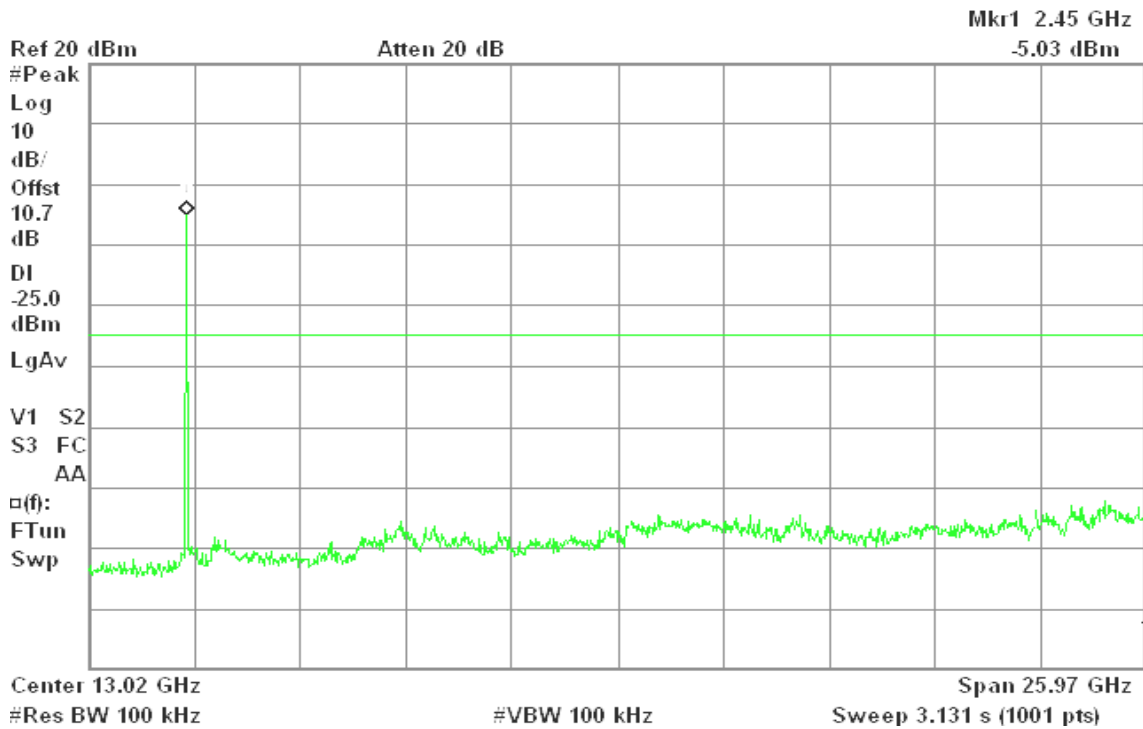




CH High

Agilent 07:11:14 Apr 20, 2010

R T

Mkr1 2.47 GHz
-5.36 dBm

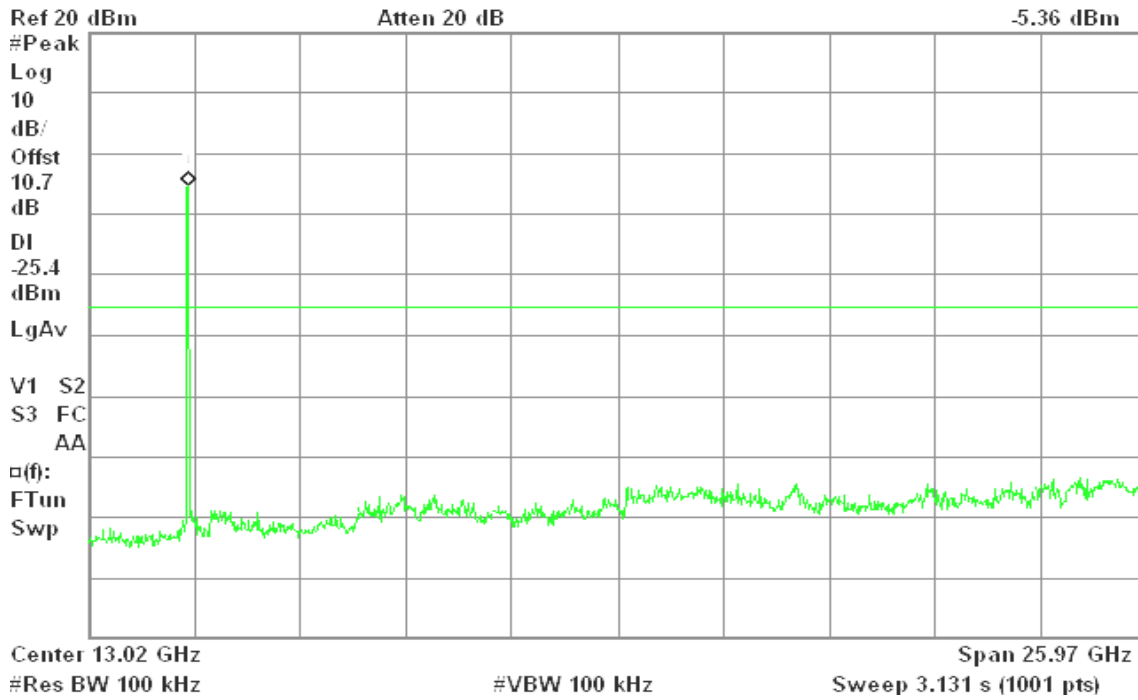


draft 802.11n Wide-40 MHz Channel mode

CH Low

Agilent 07:18:19 Apr 20, 2010

R T

Mkr1 2.42 GHz
-6.95 dBm

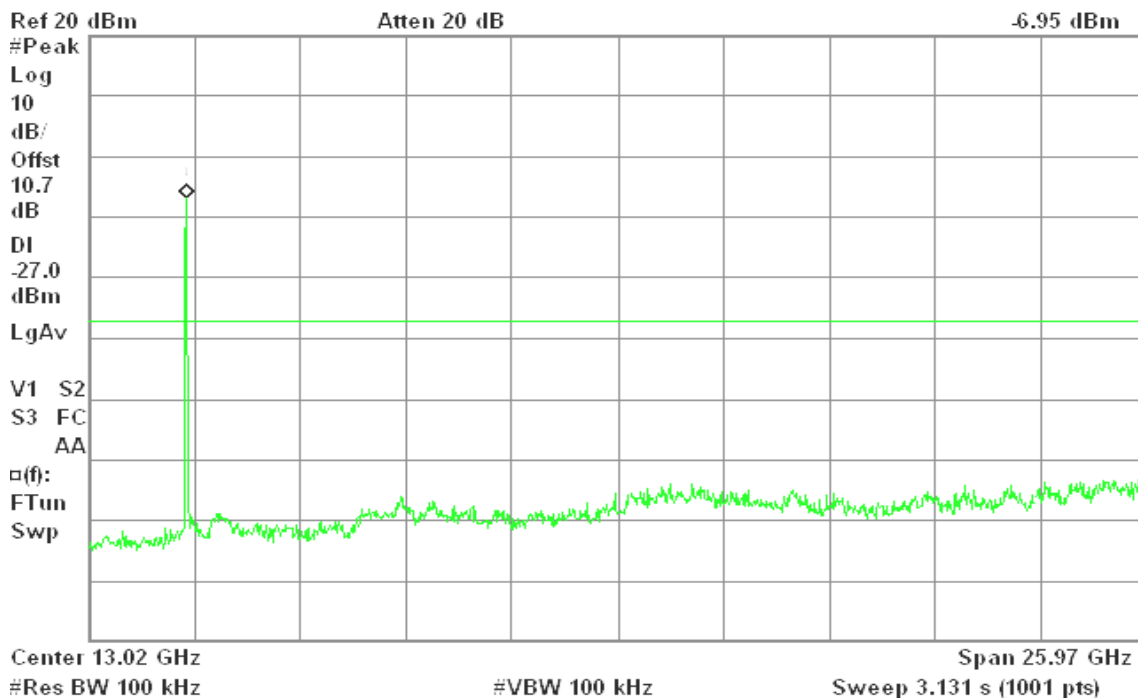




CH Mid

Agilent 07:23:14 Apr 20, 2010

R T

Mkr1 2.45 GHz
-6.47 dBm

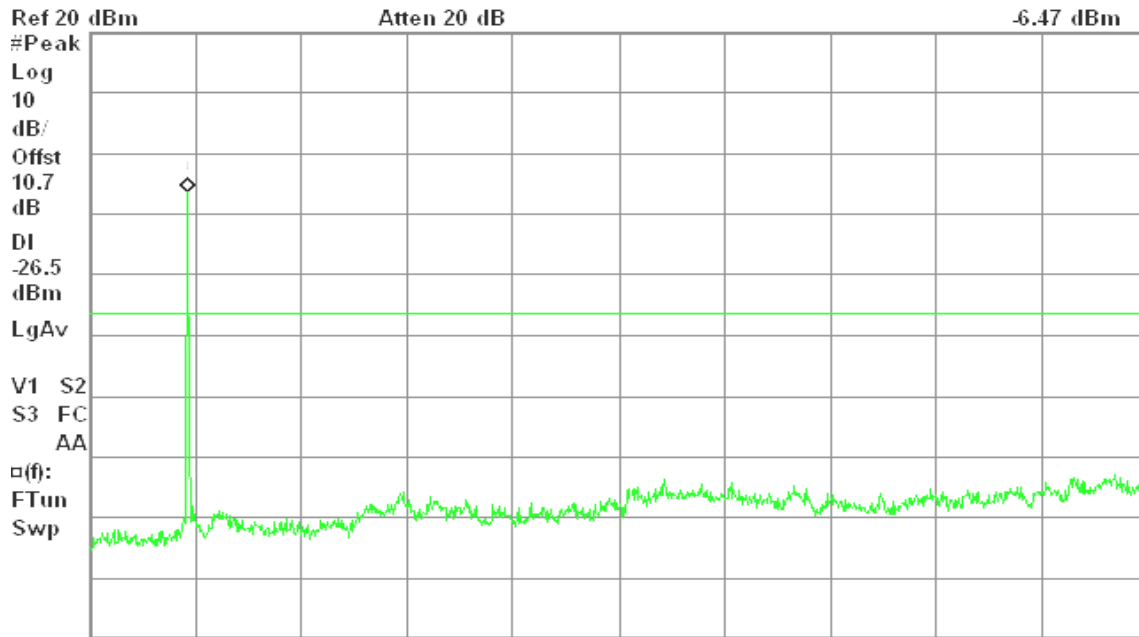

Center 13.02 GHz
#Res BW 100 kHz

#VBW 100 kHz


Span 25.97 GHz
Sweep 3.131 s (1001 pts)

CH High

Agilent 07:29:31 Apr 20, 2010

R T

Mkr1 2.45 GHz
-7.14 dBm

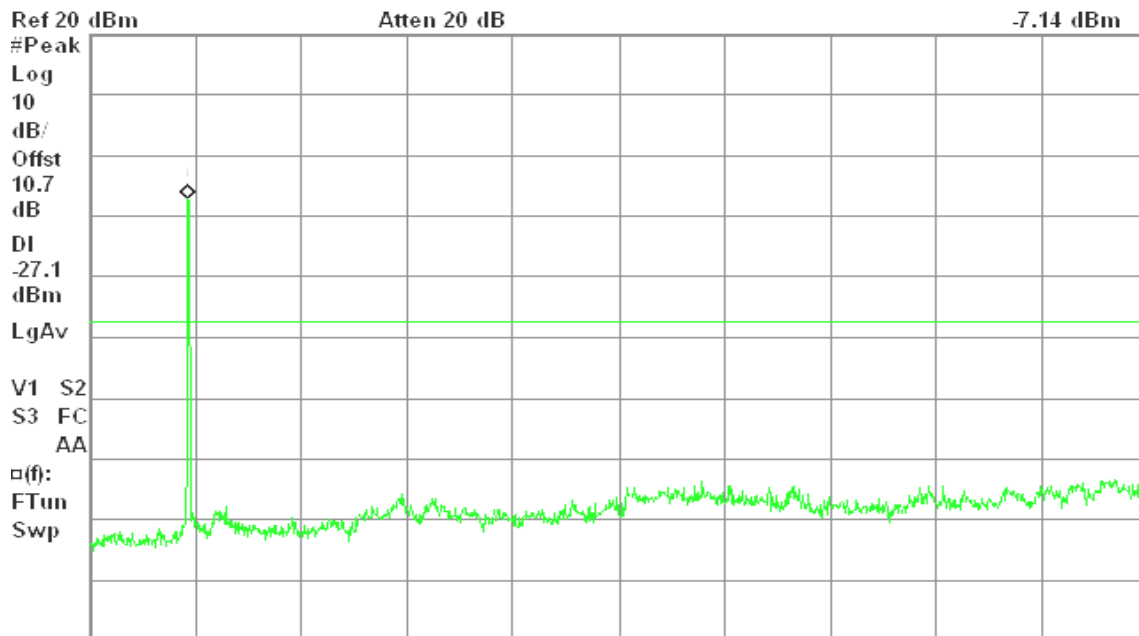

Center 13.02 GHz
#Res BW 100 kHz

#VBW 100 kHz

Span 25.97 GHz
Sweep 3.131 s (1001 pts)



7.7 RADIATED EMISSIONS

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at 3-meter)	Field Strength (dB $\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Configuration


9kHz ~ 30MHz

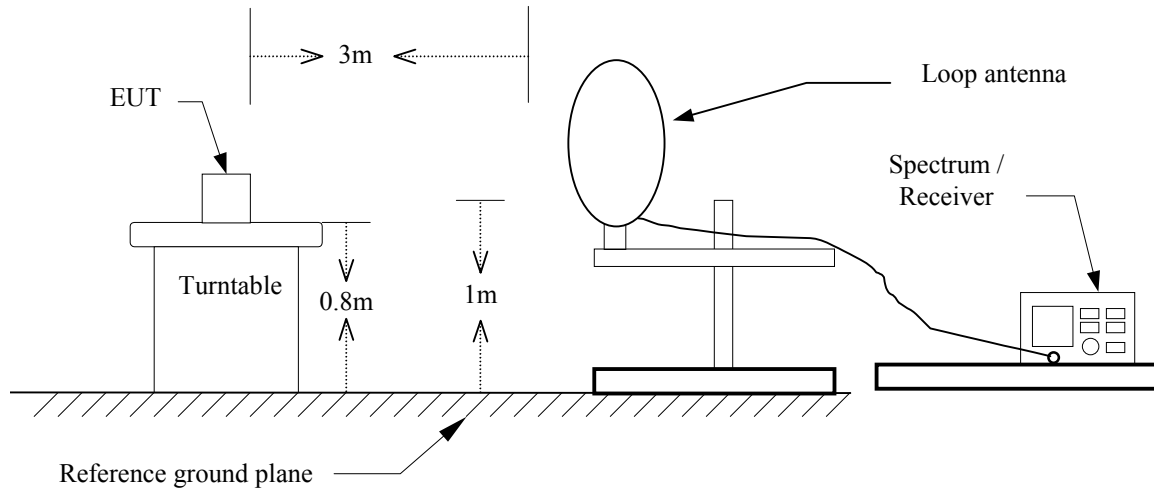

30MHz ~ 1GHz

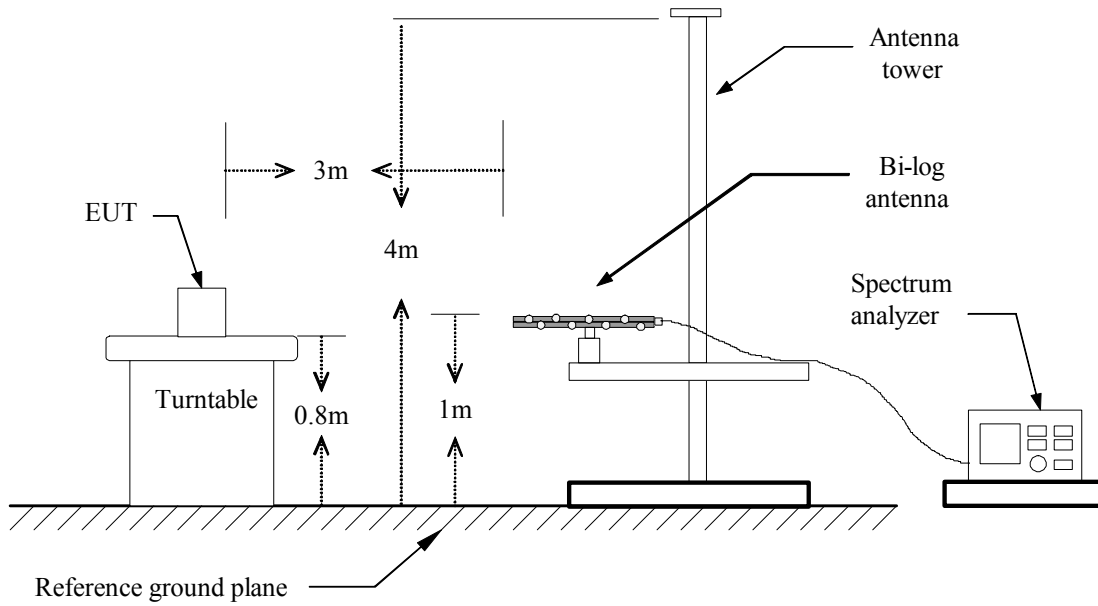

Above 1 GHz

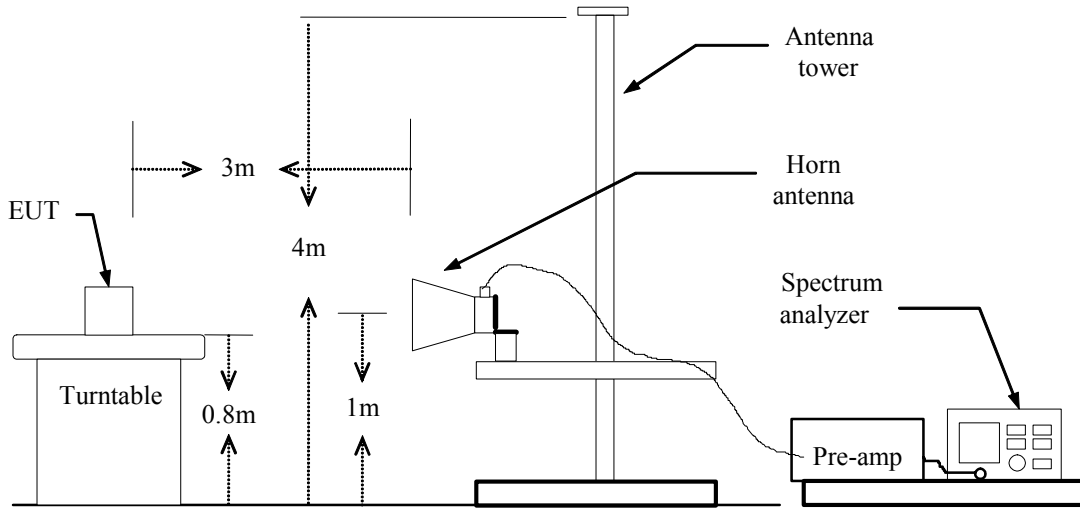



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.



TEST RESULTS

Below 1GHz

Operation Mode: Normal Link**Test Date:** April 3, 2010**Temperature:** 25°C**Tested by:** Wolf Huang**Humidity:** 55% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
63.95	V	51.98	-15.44	36.54	40.00	-3.46	Peak
167.42	V	50.27	-10.95	39.32	43.50	-4.18	Peak
353.33	V	44.80	-7.99	36.82	46.00	-9.18	Peak
500.45	V	42.45	-5.14	37.31	46.00	-8.69	Peak
666.97	V	41.00	-2.77	38.23	46.00	-7.77	Peak
1000.00	V	34.99	0.97	35.96	54.00	-18.04	Peak
167.42	H	43.51	-10.95	32.56	43.50	-10.94	Peak
353.33	H	42.54	-7.99	34.56	46.00	-11.44	Peak
388.90	H	44.31	-7.30	37.00	46.00	-9.00	Peak
500.45	H	43.21	-5.14	38.06	46.00	-7.94	Peak
666.97	H	38.59	-2.77	35.81	46.00	-10.19	Peak
959.58	H	32.30	0.44	32.75	46.00	-13.25	Peak

Remark:

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Result (dBuV/m) – Limit (dBuV/m).



Above 1 GHz

Operation Mode: TX / IEEE 802.11b / CH Low

Test Date: April 2, 2010

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 55 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1500.00	V	63.51	55.09	-8.76	54.75	46.33	74.00	54.00	-7.67	AVG
4825.00	V	49.10	---	1.18	50.28	---	74.00	54.00	-3.72	Peak
7233.33	V	51.32	42.28	5.24	56.56	47.52	74.00	54.00	-6.48	AVG
N/A										
1500.00	H	63.66	56.99	-8.76	54.90	48.23	74.00	54.00	-5.77	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11b / CH Mid

Test Date: April 2, 2010

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 55 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1500.00	V	59.45	---	-8.76	50.69	---	74.00	54.00	-3.31	Peak
N/A										
1500.00	H	63.72	57.25	-8.76	54.96	48.49	74.00	54.00	-5.51	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11b / CH High

Test Date: April 2, 2010

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 55 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1500.00	V	59.30	---	-8.76	50.54	---	74.00	54.00	-3.46	Peak
N/A										
1500.00	H	63.52	55.36	-8.76	54.76	46.60	74.00	54.00	-7.40	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH Low

Test Date: April 2, 2010

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 55 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1500.00	V	59.62	---	-8.76	50.86	---	74.00	54.00	-3.14	Peak
N/A										
1500.00	H	63.56	56.32	-8.76	54.80	47.56	74.00	54.00	-6.44	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH Mid

Test Date: April 2, 2010

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 55 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1500.00	V	59.25	---	-8.76	50.49	---	74.00	54.00	-3.51	Peak
N/A										
1500.00	H	63.59	56.63	-8.76	54.83	47.87	74.00	54.00	-6.13	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH High

Test Date: April 2, 2010

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 55 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1500.00	V	59.81	---	-8.76	51.05	---	74.00	54.00	-2.95	Peak
N/A										
1500.00	H	63.24	56.31	-8.76	54.48	47.55	74.00	54.00	-6.45	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH Low

Test Date: April 2, 2010

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 55 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1500.00	V	59.85	---	-8.76	51.09	---	74.00	54.00	-2.91	Peak
N/A										
1500.00	H	63.29	56.98	-8.76	54.53	48.22	74.00	54.00	-5.78	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH Mid

Test Date: April 2, 2010

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 55 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1500.00	V	59.82	---	-8.76	51.06	---	74.00	54.00	-2.94	Peak
1833.33	V	59.69	48.38	-5.69	54.00	42.69	74.00	54.00	-11.31	AVG
N/A										
1500.00	H	63.66	56.91	-8.76	54.90	48.15	74.00	54.00	-5.85	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH High

Test Date: April 2, 2010

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 55 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1500.00	V	59.62	---	-8.76	50.86	---	74.00	54.00	-3.14	Peak
N/A										
1500.00	H	63.21	56.12	-8.76	54.45	47.36	74.00	54.00	-6.64	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode / CH Low

Test Date: April 2, 2010

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 55 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1500.00	V	59.64	---	-8.76	50.88	---	74.00	54.00	-3.12	Peak
N/A										
1500.00	H	63.03	56.01	-8.76	54.27	47.25	74.00	54.00	-6.75	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode / CH Mid

Test Date: April 2, 2010

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 55 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1500.00	V	58.95	---	-8.76	50.19	---	74.00	54.00	-3.81	Peak
1500.00	H	63.55	56.98	-8.76	54.79	48.22	74.00	54.00	-5.78	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode / CH High

Test Date: April 2, 2010

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 55 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1500.00	V	60.04	---	-8.76	51.28	---	74.00	54.00	-2.72	Peak
N/A										
1500.00	H	63.51	57.02	-8.76	54.75	48.26	74.00	54.00	-5.74	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



7.8 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data

Operation Mode: Normal Link **Test Date:** April 21, 2010
Temperature: 25°C **Tested by:** Lawrence Lee
Humidity: 55% RH

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB/m)	QP Result (dBuV/m)	AV Result (dBuV/m)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.1500	54.18	36.78	0.22	54.40	37.00	66.00	56.00	-11.60	-19.00	L1
0.2050	49.32	31.02	0.18	49.50	31.20	63.41	53.41	-13.91	-22.21	L1
0.2750	43.95	26.55	0.15	44.10	26.70	60.97	50.97	-16.87	-24.27	L1
0.4800	40.83	27.33	0.07	40.90	27.40	56.34	46.34	-15.44	-18.94	L1
0.6000	40.24	26.04	0.06	40.30	26.10	56.00	46.00	-15.70	-19.90	L1
5.4950	40.61	32.01	0.19	40.80	32.20	60.00	50.00	-19.20	-17.80	L1
0.2050	47.50	28.90	0.20	47.70	29.10	63.41	53.41	-15.71	-24.31	L2
0.2700	39.63	20.73	0.17	39.80	20.90	61.12	51.12	-21.32	-30.22	L2
0.4800	41.21	28.01	0.09	41.30	28.10	56.34	46.34	-15.04	-18.24	L2
0.5950	39.82	27.12	0.08	39.90	27.20	56.00	46.00	-16.10	-18.80	L2
0.9550	35.02	22.92	0.08	35.10	23.00	56.00	46.00	-20.90	-23.00	L2
5.8550	36.43	29.13	0.27	36.70	29.40	60.00	50.00	-23.30	-20.60	L2


Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10 kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9 kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)



Test Plots

Conducted emissions (Line 1)

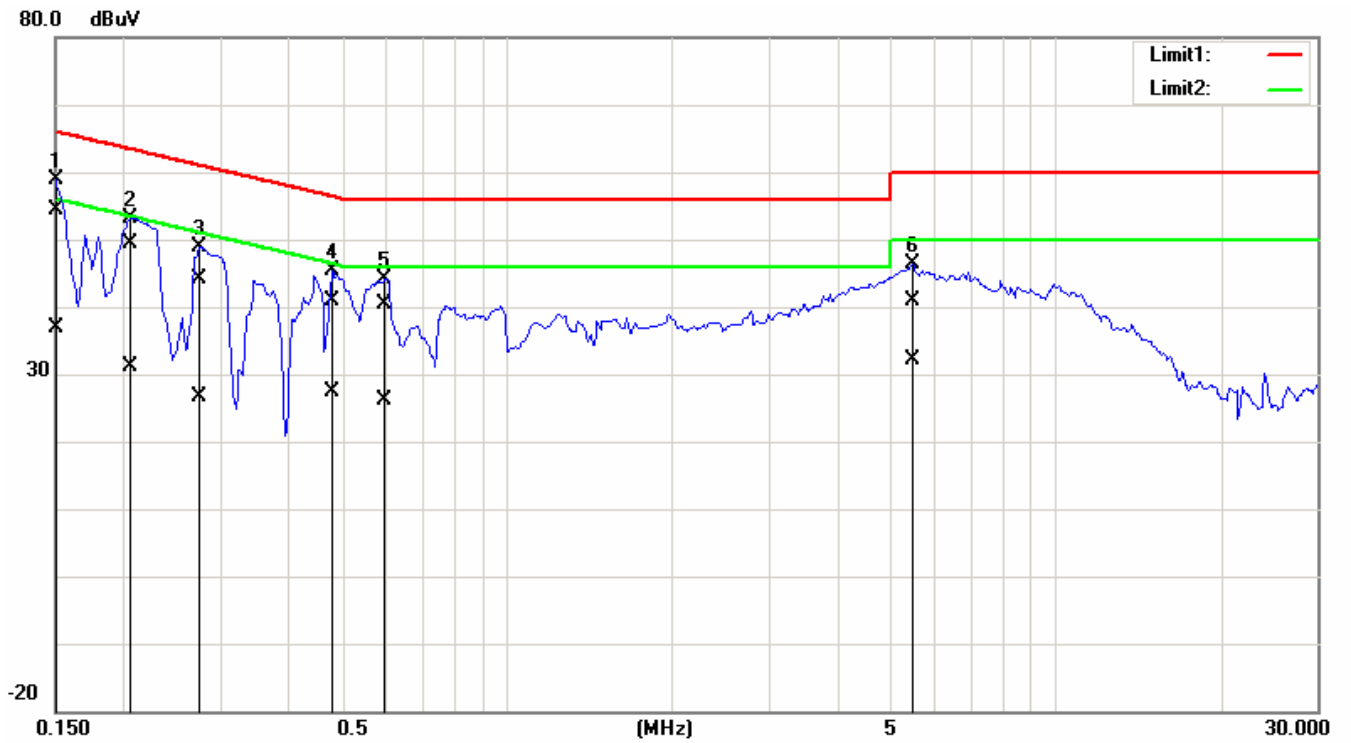

Conducted emissions (Line 2)

