

FCC TEST REPORT

for

WIRELESS PCI CARD

Model No.: WP61RL

of

Applicant: Pro-Nets Technology Corporation
Address: 7F, No.95, Lide St, Chung Ho City Taipei 235 Taiwan R.O.C

Tested and Prepared
by



ETS DR. GENZ TAIWAN PS CO., LTD

FCC Registration No.: 930600

Industry Canada filed test laboratory Reg. No. IC 5679

A2LA Cert.No.: 2300.01

PTCRB Accredited Type Certification Test House

FCC ID: RXZ-WP61RL

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: ets@ets-bzt.com.tw

Report No.: W6M20704-7982-C-1

TABLE OF CONTENTS

| | | |
|----------|--|-----------|
| 1 | GENERAL INFORMATION | 2 |
| 1.1 | NOTES | 2 |
| 1.2 | TESTING LABORATORY | 3 |
| 1.2.1 | <i>Location</i> | 3 |
| 1.2.2 | <i>Details of accreditation status</i> | 3 |
| 1.3 | DETAILS OF APPROVAL HOLDER | 3 |
| 1.4 | APPLICATION DETAILS | 4 |
| 1.5 | GENERAL INFORMATION OF TEST ITEM | 4 |
| 1.6 | TEST STANDARDS | 5 |
| 2 | TECHNICAL TEST | 6 |
| 2.1 | SUMMARY OF TEST RESULTS | 6 |
| 2.2 | TEST ENVIRONMENT | 6 |
| 2.3 | TEST EQUIPMENT LIST | 7 |
| 2.4 | GENERAL TEST PROCEDURE | 9 |
| 3 | TEST RESULTS (ENCLOSURE)..... | 11 |
| 3.1 | PEAK OUTPUT POWER (TRANSMITTER) | 12 |
| 3.2 | EQUIVALENT ISOTROPIC RADIATED POWER | 14 |
| 3.2.1 | <i>Transmitter</i> | 14 |
| 3.3 | RF EXPOSURE COMPLIANCE REQUIREMENTS | 14 |
| 3.4 | TRANSMITTER RADIATED EMISSIONS IN RESTRICTED BANDS..... | 15 |
| 3.5 | SPURIOUS EMISSIONS (TX) | 16 |
| 3.6 | MINIMUM 6 DB BANDWIDTH | 21 |
| 3.7 | PEAK POWER SPECTRAL DENSITY | 22 |
| 3.8 | RADIATED EMISSION FROM DIGITAL PART AND RECEIVER L.O. | 23 |
| 3.9 | POWER LINE CONDUCTED EMISSION | 27 |
| | APPENDIX | 29 |

Registration number: W6M20704-7982-C-1
FCC ID: RXZ-WP61RL

1 General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has Passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems.

The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the ETS DR. GENZ TAIWAN PS CO., LTD.

Specific Conditions:

Usage of the hereunder tested device in combination with other integrated or external antennas requires at least additional output power measurements, spurious emission measurements, conducted emission measurements (AC supply lines) and radio frequency exposure evaluations for each individual configuration performed, for certification by FCC.

The test sample is able to work according IEEE 802.11 b/g.

This report is related to FCC Part 15 C (DSSS and OFDM device).

Tester:

April 20, 2007

Jay Chaing



Date

ETS-Lab.


Name

Signature

Technical responsibility for area of testing:

April 20, 2007

Steven Chuang



Date

ETS

Name

Signature

Registration number: W6M20704-7982-C-1
FCC ID: RXZ-WP61RL

1.2 Testing laboratory

1.2.1 Location

OATS
No.5-1, Shuang Sing Village,
LiShuei Rd., Wanli Township,
Taipei County 207, Taiwan (R.O.C.)

Company
ETS Dr.Genx Taiwan PS Co., Ltd.
6F, NO. 58, LANE 188, RUEY-KUANG RD.
NEIHU, TAIPEI 114, TAIWAN R.O.C.
Tel : 886-2-66068877
Fax : 886-2-66068879

1.2.2 Details of accreditation status

Accredited testing laboratory

A2LA-registration number: 2300.01

FCC filed test laboratory Reg. No. 930600

Industry Canada filed test laboratory Reg. No. IC 5679

PTCRB Accredited Type Certification Test House

1.3 Details of approval holder

| | |
|-----------|------------------------------------|
| Name | : Pro-Nets Technology Corporation |
| Street | : 7F, No.95,Lide St, Chung Ho City |
| Town | : Taipei 235 |
| Country | : Taiwan R.O.C |
| Telephone | : +886-2-8221-8385 |
| Fax | : +886-2-3234-5818 |

Registration number: W6M20704-7982-C-1
FCC ID: RXZ-WP61RL

1.4 Application details

Date of receipt of application : April 10, 2007
Date of receipt of test item : April 11, 2007
Date of test : from April 12, 2007 to April 20, 2007

1.5 General information of Test item

Type of test item : WIRELESS PCI CARD
Model Number : WP61RL
Brand Name : PRO-NETS , Speed Com+ , Jet Com , Medilink , Encore
Hardware : Ver: 1.0
Software : Ver: 1.0.2.0
Multi-listing model number : ./.
Photos : see Appendix

Technical data

Frequency band : 2.4 GHz – 2.4835 GHz
Frequency (ch 1 or A) : 2.412 GHz
Frequency (ch 6 or B) : 2.437 GHz
Frequency (ch 11 or C) : 2.462 GHz
Number of Channels : 11
Operation modes : duplex
Modulation Type : DSSS / OFDM
Fixed point-to-point operation: Yes / No
Type of Antenna : Reverse SMA Antenna
Antenna gain : 2.0 dBi
Power supply : 3.3 VDC (power on PC)
Emission designator : DSSS: 16M8G1D
OFDM: 17M9W7D

Registration number: W6M20704-7982-C-1
 FCC ID: RXZ-WP61RL

Host device: none

Classification :

| | |
|--|-------------------------------------|
| Fixed Device | <input checked="" type="checkbox"/> |
| Mobile Device (Human Body distance > 20cm) | <input type="checkbox"/> |
| Portable Device (Human Body distance < 20cm) | <input type="checkbox"/> |

Transmitter

Unom

Mode A (DSSS)

Power (ch 1 or A) : Conducted: 14.88 dBm
 Power (ch 6 or B) : Conducted: 15.58 dBm
 Power (ch 11 or C) : Conducted: 16.07 dBm

Mode B (OFDM)

Power (ch 1 or A) : Conducted: 14.43 dBm
 Power (ch 6 or B) : Conducted: 14.96 dBm
 Power (ch 11 or C) : Conducted: 15.34 dBm

Manufacturer:
 (if applicable)

Name : ./.
 Street : ./.
 Town : ./.
 Country : ./.

Additional information: The sample is using WLAN technology according IEEE 802.11 b/g.
 There are two testing modes in the test report.
 Mode A: IEEE 802.11b
 Mode B: IEEE 802.11g
 The scheme for frequency generation, spectrum spreading,
 receiver parameters, synchronization procedure, and other parameters
 are determined by the mentioned standard above.

1.6 Test standards

Technical standard : FCC RULES PART 15 SUBPART B / SUBPART C § 15.247: August, 2006

Registration number: W6M20704-7982-C-1
FCC ID: RXZ-WP61RL

2 Technical test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.



or

The deviations as specified in 2.5 were ascertained in the course of the tests performed.



2.2 Test environment

| | |
|-------------------------------|-------------------------|
| Temperature | : 23 °C |
| Relative humidity content | : 20 ... 75 % |
| Air pressure | : 86 ... 103 kPa |
| Power supply | : 3.3 VDC (power on PC) |
| Extreme conditions parameters | : -- |

Registration number: W6M20704-7982-C-1
 FCC ID: RXZ-WP61RL

2.3 Test Equipment List

| No. | Test equipment | Type | Serial No. | Manufacturer | Cal. Date | Next Cal. Date |
|--------------|---|------------------|----------------|--------------|----------------------|----------------|
| ETSTW-CE 001 | EMI TEST RECEIVER | ESHS10 | 842121/013 | R&S | 2006/10/16 | 2007/10/15 |
| ETSTW-CE 002 | PREREULATOR MODE DC POWER SUPPLY | None | None | | Function Test | |
| ETSTW-CE 003 | AC POWER SOURCE | APS-9102 | D161137 | GW | Function Test | |
| ETSTW-CE 004 | ZWEILEITER-V-NETZNACHBILDUNG TWO-LINE V-NETWORK | ESH3-Z5 | 840731/011 | R&S | 2006/10/16 | 2007/10/15 |
| ETSTW-CE 005 | Line-Impedance Stabilisation Network | NNBM 8126D | 137 | Schwarzbeck | 2006/10/16 | 2007/10/15 |
| ETSTW-CE 006 | IMPULSBEGRENZER PULSE LIMITER | ESH3-Z2 | 100226 | R&S | In House Certificate | |
| ETSTW-CE 008 | ABSORBING CLAMP | MDS 21 | 3469 | Schwarzbeck | 2005/10/24 | 2007/10/23 |
| ETSTW-CE 009 | TEMP.&HUMIDITY CHAMBER | GTH-225-40-1P-U | MAA0305-009 | GIANT FORCE | 2006/8/17 | 2007/8/16 |
| ETSTW-CE 013 | CISPR 22 TWO BALANCED TELECOM PAIRS IMPEDANCE STABILIZATION NETWORK | FCC-TLISN-T4-02 | 20242 | FCC | 2005/12/8 | 2007/12/7 |
| ETSTW-CE 014 | CISPR 22 TWO BALANCED TELECOM PAIRS IMPEDANCE STABILIZATION NETWORK | FCC-TLISN-T2-02 | 20241 | FCC | 2005/12/7 | 2007/12/6 |
| ETSTW-CE 015 | CISPR 22 TWO BALANCED TELECOM PAIRS IMPEDANCE STABILIZATION NETWORK | FCC-TLISN-T8-02 | 20307 | FCC | 2006/11/7 | 2008/11/6 |
| ETSTW-CE 016 | TWO-LINE V-NETWORK | ENV216 | 100050 | R&S | 2006/11/21 | 2007/11/20 |
| ETSTW-RE 002 | Function Generator | 33220A | MY43004982 | Agilent | 2005/10/14 | 2007/10/13 |
| ETSTW-RE 003 | EMI TEST RECEIVER | ESI 26 | 831438/001 | R&S | 2006/10/20 | 2007/10/19 |
| ETSTW-RE 004 | EMI TEST RECEIVER | ESI 40 | 832427/004 | R&S | 2006/10/30 | 2007/10/29 |
| ETSTW-RE 005 | EMI TEST RECEIVER | ESVS10 | 843207/020 | R&S | 2006/10/12 | 2007/10/11 |
| ETSTW-RE 010 | PROGRAMMABLE LINEAR POWER SUPPLY | LPS-305 | 30503070181 | MOTECH | Function Test | |
| ETSTW-RE 011 | PROGRAMMABLE LINEAR POWER SUPPLY | LPS-305 | 30503070165 | MOTECH | Function Test | |
| ETSTW-RE 017 | Log-Periodic Antenna | HL025 | 352886/001 | R&S | 2006/5/4 | 2008/5/3 |
| ETSTW-RE 018 | MICROWAVE HORN ANTENNA | AT4560 | 27212 | AR | 2004/11/8 | 2007/11/7 |
| ETSTW-RE 020 | MICROWAVE HORN ANTENNA | AT4002A | 306915 | AR | Function Test | |
| ETSTW-RE 021 | SWEEP GENERATOR | SWM05 | 835130/010 | R&S | 2006/10/11 | 2007/10/10 |
| ETSTW-RE 027 | Passive Loop Antenna | 6512 | 00034563 | EMCO | 2004/6/30 | 2007/6/29 |
| ETSTW-RE 028 | Log-Periodic DipoleArray Antenna | 3148 | 34429 | EMCO | 2006/5/26 | 2008/5/25 |
| ETSTW-RE 029 | Biconical Antenna | 3109 | 33524 | EMCO | 2006/5/26 | 2008/5/25 |
| ETSTW-RE 030 | Double-Ridged Guide Horn Antenna | 3117 | 00035224 | EMCO | 2006/5/3 | 2008/5/2 |
| ETSTW-RE 032 | Millivoltmeter | URV 55 | 849086/013 | R&S | 2006/10/11 | 2007/10/10 |
| ETSTW-RE 033 | WaveRunner 6000A Serise Oscilloscope | WAVERUNNER 6100A | LCRY0604P14508 | LeCroy | 2006/7/27 | 2007/7/26 |
| ETSTW-RE 034 | Power Sensor | URV5-Z4 | 839313/006 | R&S | 2005/10/17 | 2007/10/16 |
| ETSTW-RE 042 | Biconical Antenna | HK116 | 100172 | R&S | 2007/1/11 | 2009/1/10 |
| ETSTW-RE 043 | Log-Periodic Dipole Antenna | HL223 | 100166 | R&S | 2006/5/8 | 2008/5/7 |
| ETSTW-RE 044 | Log-Periodic Antenna | HL050 | 100094 | R&S | 2006/5/29 | 2008/5/28 |
| ETSTW-RE 048 | Triple Loop Antenna | HXYZ 9170 | HXYZ 9170-134 | Schwarzbeck | 2005/3/22 | 2008/3/21 |

Registration number: W6M20704-7982-C-1
FCC ID: RXZ-WP61RL

| | | | | | | |
|--------------|-------------------------------------|-------------|------------|-------------|---------------|-----------|
| ETSTW-RE 049 | TRILOG Super Broadband test Antenna | VULB 9160 | 9160-3185 | Schwarzbeck | 2005/5/19 | 2007/5/18 |
| ETSTW-RE 055 | SPECTRUM ANALYZER | FSU-26 | 200074 | R&S | 2006/7/28 | 2007/7/27 |
| ETSTW-RE 064 | Bluetooth Test Set | MT8852B-042 | 6K00005709 | Anritsu | Function Test | |

Registration number: W6M20704-7982-C-1
FCC ID: RXZ-WP61RL

2.4 General Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.4-2003 using a 50 μ H LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

RADIATION INTERFERENCE: The test procedure used was according to ANSI STANDARD C63.4-2003 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The ambient temperature of the UUT was 23°C with a humidity of 40 %.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB μ V) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:

| | |
|------------|--|
| Freq (MHz) | METER READING + ACF + CABLE LOSS (to the receiver) = FS |
| 33 | 20 dB μ V + 10.36 dB + 6 dB = 36.36 dB μ V/m @3m |

The UUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table) and arranged according to ANSI C63.4-2000 Section 13.1.2. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

Measurements were made by ETS Dr.Geniz Taiwan PS Co., Ltd. at the registered open field test site located at No.5-1, Shuang Sing Village, LiShuei Rd., Wanli Township, Taipei County 207, Taiwan (R.O.C.) The Registration Number: 930600.

Registration number: W6M20704-7982-C-1
FCC ID: RXZ-WP61RL

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

The formula is as follows:

Average = Peak + Duty Factor

Duty Factor = $20 \log(\text{dwell time}/T)$

T = 100ms when the pulse train period is over 100 ms or the period of the pulse train.

Modified Limits for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

ANTENNA & GROUND:

This unit uses Reverse SMA Antenna. (see photos)

Registration number: W6M20704-7982-C-1
 FCC ID: RXZ-WP61RL

3 Test results (enclosure)

| TEST CASE | Para. Number | Required | Test passed | Test failed |
|---|--------------|-------------------------------------|-------------------------------------|--------------------------|
| Peak Output Power | 15.247(b)(3) | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Equivalent radiated Power | 15.247(b)(3) | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Spurious Emissions radiated – Transmitter operating | 15.247(c) | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Band Edge Measurement | 15.247(c) | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Minimum 6 dB Bandwidth | 15.247(a)(2) | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Peak Power Spectral Density | 15.247(d) | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Radiated Emission from Digital Part And Receiver L.O. | 15.109 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Power Line Conducted Emission | 15.207 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |

The follows is intended to leave blank.

Registration number: W6M20704-7982-C-1
 FCC ID: RXZ-WP61RL

3.1 Peak Output Power (transmitter)

FCC Rule: 15.247(b)(3)

This measurement applies to equipment with an integral antenna and to equipment with an antenna connector and equipped with an antenna as declared by the applicant.

The power was measured with modulation (declared by the applicant).

Mode A

| Test condition | | Conducted Power | | |
|-------------------------|---------------------------|-----------------|-----------|-----------|
| | | Channel A | Channel B | Channel C |
| $T_{nom} = 23^{\circ}C$ | $V_{nom} = 3.3 \text{ V}$ | [dBm] | [dBm] | [dBm] |
| | | 14.88 | 15.58 | 16.07 |

Mode B

| Test condition | | Conducted Power | | |
|-------------------------|---------------------------|-----------------|-----------|-----------|
| | | Channel A | Channel B | Channel C |
| $T_{nom} = 23^{\circ}C$ | $V_{nom} = 3.3 \text{ V}$ | [dBm] | [dBm] | [dBm] |
| | | 14.43 | 14.96 | 15.34 |

Mode A

| Test condition | Signal Field strength TX highest power mode dB μ V/m |
|--|---|
| $T_{nom} = 23^{\circ}C, V_{nom} = 3.3 \text{ V}$ | |
| Frequency [MHz] | 112.47 |
| 2463 | |

Mode B

| Test condition | Signal Field strength TX highest power mode dB μ V/m |
|--|---|
| $T_{nom} = 23^{\circ}C, V_{nom} = 3.3 \text{ V}$ | |
| Frequency [MHz] | 107.58 |
| 2465 | |

Registration number: W6M20704-7982-C-1
FCC ID: RXZ-WP61RL

Limits:

| Frequency MHz | Power dBm |
|------------------|--------------|
| 902 - 928 | 30 |
| 2400 – 2483.5 | 30 |
| 5725 – 5850 | 30 |

In case of employing transmitter antennas having antenna gain > 6 dBi and using fixed point-to-point operation consider §15.247 (b)(4)

Test equipment used: ETSTW-RE 003 ETSTW-RE 004 ETSTW-RE 055

Comment: The diagrams for the field strength measurements are included in Appendix.

Registration number: W6M20704-7982-C-1
 FCC ID: RXZ-WP61RL

3.2 Equivalent isotropic radiated power

FCC Rule: 15.247(b)(3)

EIRP = max. conducted output power + antenna gain
 EIRP = 16.07 dBm + 2.0 dBi
 = 18.07 dBm

Limit: EIRP = +36 dBm for Antenna gain <6dBi

Test equipment used: ETSTW-RE 003 ETSTW-RE 004 ETSTW-RE 017 ETSTW-RE 021
 ETSTW-RE 028 ETSTW-RE 030 ETSTW-RE 043 ETSTW-RE 044

3.2.1 Transmitter

Integral Antenna:

At the transmitter the measurement was transacted with the modulation declared by the manufacturer and the maximum available output power of the EUT.
 In this arrangement the EUT fulfils the requirements of the FCC rules § 15.247, subpart C, section b.

3.3 RF Exposure Compliance Requirements

The test sample is a GSM/VOWIFI Dual-Mode Phone intended for portable installation.
 FCC OET Bulletin 65 Edition 97.01 determines the equations for predicting RF fields and applicable limits.
 The prediction for power density in the far-field but will over-predict power density in the near field, where it could be used for walking a “worst case” or conservative prediction.

$$S = \frac{PG}{4\pi R^2}$$

- S – Power Density
- P – Output power ERP
- R – Distance
- D – Cable Loss
- AG – Antenna Gain G = AG-D

| Item | Unit | Value | Remarks |
|------|--------------------|----------|------------------|
| P | mW | 40.45759 | Peak value |
| D | dB | | |
| AG | dBi | 2.0 | |
| G | | 1.6 | Calculated Value |
| R | cm | 20 | Assumed value |
| S | mW/cm ² | 0.012 | Calculated value |

Limits:

| Limit for General Population / Uncontrolled Exposure | |
|--|-------------------------------------|
| Frequency (MHz) | Power Density (mW/cm ²) |
| 1500 – 100.000 | 1,0 |

Registration number: W6M20704-7982-C-1
 FCC ID: RXZ-WP61RL

3.4 Transmitter Radiated Emissions in Restricted Bands

FCC Rules: 15.247 (c), 15.205, 15.209, 15.35

Radiated emission measurements were performed from 30 MHz to 26500 MHz.

For radiated emission tests, the analyzer setting was as followings:

Frequency \leq 1 GHz, RBW:100 kHz, VBW: 100 kHz (Peak measurements)

Frequency $>$ 1 GHz, RBW: 1 MHz, VBW: 1 MHz (Peak measurements)

Frequency $>$ 1 GHz , RBW:1 MHz , VBW: 10 Hz (Average measurements)

Limits.

For frequencies below 1GHz:

| Frequency of Emission (MHz) | Field strength (microvolts/meter) | Field Strength (dB microvolts/meter) |
|-----------------------------|-----------------------------------|--------------------------------------|
| 30 - 88 | 100 | 40.0 |
| 88 - 216 | 150 | 43.5 |
| 216 - 960 | 200 | 46.0 |
| Above | 500 | 54.0 |

For frequencies above 1GHz (Average measurements).

Guidance on Measurement of Digit Transmission Systems:

“If the emission is pulsed, modify the unit for continuous operation, use the setting shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.”

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty cycle correction = $20 \log (\text{dwell time} / 100\text{ms})$

Note: No duty cycle correction was added to the reading of this EUT.

Comment: see attached diagrams in Appendix.

Registration number: W6M20704-7982-C-1
FCC ID: RXZ-WP61RL

3.5 Spurious Emissions (tx)

Spurious emission was measured with modulation (declared by manufacturer).

In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))

FCC Rule: 15.247(c), 15.35

For out of band emissions that are close to or that exceed the 20 dB attenuation requirement described in the specification, radiated measurements were performed at a 3 m separation distance to determine whether these emissions complied with the general radiated emission requirement.

Limits:

Max. reading – 20 dB

Mode A: 112.47dB μ V/m- 20 dB= 92.47 dB μ V/m

Mode B: 107.58dB μ V/m- 20 dB= 87.58 dB μ V/m

Guidance on Measurement of Digit Transmission Systems:

“If the emission is pulsed, modify the unit for continuous operation, use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.”

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty Cycle correction = $20 \log(\text{dwell time}/100\text{ms})$

For frequencies above 1GHz (Peak measurements).

Modified Limit for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

For frequencies above 1GHz (Average measurements).

Max. reading – 20dB

Note: No duty cycle correction was added to the reading of EUT.

Test equipment used: ETSTW-RE 003 ETSTW-RE 004 ETSTW-RE 017 ETSTW-RE 028
ETSTW-RE 029 ETSTW-RE 030 ETSTW-RE 042 ETSTW-RE 043
ETSTW-RE 044

Comment: see attached diagrams in Appendix.

Registration number: W6M20704-7982-C-1
 FCC ID: RXZ-WP61RL

SAMPLE CALCULATION OF LIMIT. All results will be updated by an automatic measuring system in accordance with point 2.3.

Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

The peak and average spurious emission plots was measured with the average limits.

In the Table being listed the critical peak and average value and exhibit the compliance with the above calculated Limits.

If in the column's correction factor states a value then the max. Field strength in the same row is corrected by a value gained from the "Duty-Cycle Correction Factor".

Summary table with radiated data of the test plots

**Mode A
 CH 1**

| Antenna Polarization | Frequency Marker (MHz) | Reading (dBUV) | Correction Factor (dB) | Detector | Test Result (dBUV/m) | Compliance Limit (dBUV/m) | Margin (dB) | Antenna Height (cm) | Table Azimuth (degree) |
|----------------------|------------------------|----------------|------------------------|----------|----------------------|---------------------------|-------------|---------------------|------------------------|
| H | 2335.0701 | 47.74 | 2.10 | PK | 49.84 | 54 | 4.16 | 120 | 240 |
| | 2389.5791 | 35.66 | 2.07 | PK | 37.73 | 54 | 16.27 | 115 | 200 |
| | 3216.2437 | 50.79 | 0.32 | PK | 51.11 | 92.47 | 41.36 | 110 | 175 |
| | 6436.7488 | 45.99 | 6.02 | PK | 52.01 | 92.47 | 40.46 | 130 | 210 |

| Antenna Polarization | Frequency Marker (MHz) | Reading (dBUV) | Correction Factor (dB) | Detector | Test Result (dBUV/m) | Compliance Limit (dBUV/m) | Margin (dB) | Antenna Height (cm) | Table Azimuth (degree) |
|----------------------|------------------------|----------------|------------------------|----------|----------------------|---------------------------|-------------|---------------------|------------------------|
| V | 2331.0621 | 50.74 | 2.10 | PK | 52.84 | 74 | 21.16 | 120 | 240 |
| | 2331.0621 | 39.13 | 2.10 | AV | 41.23 | 54 | 12.77 | 120 | 240 |
| | 2389.5791 | 36.85 | 2.07 | PK | 38.92 | 54 | 15.08 | 115 | 200 |
| | 3216.2437 | 50.16 | 0.32 | PK | 50.48 | 92.47 | 41.99 | 110 | 175 |
| | 4016.6320 | 47.11 | 3.34 | PK | 50.45 | 54 | 3.55 | 100 | 205 |
| | 6436.7488 | 45.24 | 6.02 | PK | 51.26 | 92.47 | 41.21 | 130 | 210 |

Registration number: W6M20704-7982-C-1
 FCC ID: RXZ-WP61RL

Ch6

| Antenna Polarization | Frequency Marker (MHz) | Reading (dBUV) | Correction Factor (dB) | Detector | Test Result (dBUV/m) | Compliance Limit (dBUV/m) | Margin (dB) | Antenna Height (cm) | Table Azimuth (degree) |
|----------------------|------------------------|----------------|------------------------|----------|----------------------|---------------------------|-------------|---------------------|------------------------|
| H | 2355.9188 | 45.31 | 2.09 | PK | 47.40 | 54 | 6.60 | 120 | 305 |
| | 2389.5791 | 35.48 | 2.07 | PK | 37.55 | 54 | 16.45 | 115 | 200 |
| | 3248.2626 | 48.99 | 0.27 | PK | 49.26 | 92.47 | 43.21 | 135 | 160 |
| | 6501.0704 | 43.73 | 6.16 | PK | 49.89 | 92.47 | 42.58 | 100 | 170 |

| Antenna Polarization | Frequency Marker (MHz) | Reading (dBUV) | Correction Factor (dB) | Detector | Test Result (dBUV/m) | Compliance Limit (dBUV/m) | Margin (dB) | Antenna Height (cm) | Table Azimuth (degree) |
|----------------------|------------------------|----------------|------------------------|----------|----------------------|---------------------------|-------------|---------------------|------------------------|
| V | 2354.3086 | 48.34 | 2.09 | PK | 50.43 | 54 | 3.57 | 120 | 305 |
| | 2389.5791 | 36.89 | 2.07 | PK | 38.96 | 54 | 15.04 | 115 | 200 |
| | 3248.2626 | 48.50 | 0.27 | PK | 48.77 | 92.47 | 43.70 | 135 | 160 |
| | 4064.1282 | 46.59 | 2.97 | PK | 49.56 | 54 | 4.44 | 105 | 265 |
| | 4873.6646 | 43.45 | 4.81 | PK | 48.26 | 54 | 5.74 | 120 | 220 |
| | 6501.0704 | 43.92 | 6.16 | PK | 50.08 | 92.47 | 42.39 | 100 | 170 |

Ch11

| Antenna Polarization | Frequency Marker (MHz) | Reading (dBUV) | Correction Factor (dB) | Detector | Test Result (dBUV/m) | Compliance Limit (dBUV/m) | Margin (dB) | Antenna Height (cm) | Table Azimuth (degree) |
|----------------------|------------------------|----------------|------------------------|----------|----------------------|---------------------------|-------------|---------------------|------------------------|
| H | 2378.3567 | 41.92 | 2.07 | PK | 43.99 | 54 | 10.01 | 100 | 300 |
| | 2483.5000 | 38.08 | -1.11 | PK | 36.97 | 54 | 17.03 | 130 | 260 |
| | 4921.8436 | 44.81 | 4.75 | PK | 49.56 | 54 | 4.44 | 135 | 300 |

| Antenna Polarization | Frequency Marker (MHz) | Reading (dBUV) | Correction Factor (dB) | Detector | Test Result (dBUV/m) | Compliance Limit (dBUV/m) | Margin (dB) | Antenna Height (cm) | Table Azimuth (degree) |
|----------------------|------------------------|----------------|------------------------|----------|----------------------|---------------------------|-------------|---------------------|------------------------|
| V | 2379.1583 | 45.27 | 2.07 | PK | 47.34 | 54 | 6.66 | 100 | 300 |
| | 2483.5000 | 37.37 | -1.11 | PK | 36.26 | 54 | 17.74 | 130 | 260 |
| | 3284.1162 | 44.00 | 0.22 | PK | 44.22 | 92.47 | 48.25 | 150 | 260 |
| | 4096.1923 | 45.43 | 2.73 | PK | 48.16 | 54 | 5.84 | 140 | 215 |
| | 4921.8436 | 45.49 | 4.75 | PK | 50.24 | 54 | 3.76 | 135 | 300 |
| | 6567.7488 | 43.84 | 5.88 | PK | 49.72 | 92.47 | 42.75 | 110 | 110 |

Registration number: W6M20704-7982-C-1
 FCC ID: RXZ-WP61RL

Mode B
CH 1

| Antenna Polarization | Frequency Marker (MHz) | Reading (dBuV) | Correction Factor (dB) | Detector | Test Result (dBuV/m) | Compliance Limit (dBuV/m) | Margin (dB) | Antenna Height (cm) | Table Azimuth (degree) |
|----------------------|------------------------|----------------|------------------------|----------|----------------------|---------------------------|-------------|---------------------|------------------------|
| H | 2359.1182 | 42.21 | 2.08 | PK | 44.29 | 54 | 9.71 | 120 | 305 |
| | 2389.5791 | 35.69 | 2.07 | PK | 37.76 | 54 | 16.24 | 115 | 200 |
| | 3216.2437 | 54.48 | 0.32 | PK | 54.80 | 87.58 | 32.78 | 110 | 175 |
| | 6436.7488 | 46.98 | 6.02 | PK | 53.00 | 87.58 | 34.58 | 130 | 210 |

| Antenna Polarization | Frequency Marker (MHz) | Reading (dBuV) | Correction Factor (dB) | Detector | Test Result (dBuV/m) | Compliance Limit (dBuV/m) | Margin (dB) | Antenna Height (cm) | Table Azimuth (degree) |
|----------------------|------------------------|----------------|------------------------|----------|----------------------|---------------------------|-------------|---------------------|------------------------|
| V | 2350.0300 | 45.33 | 2.09 | PK | 47.42 | 54 | 6.58 | 120 | 305 |
| | 2389.5791 | 35.34 | 2.07 | PK | 37.41 | 54 | 16.59 | 115 | 200 |
| | 3216.2437 | 53.62 | 0.32 | PK | 53.94 | 87.58 | 33.64 | 110 | 175 |

Ch6

| Antenna Polarization | Frequency Marker (MHz) | Reading (dBuV) | Correction Factor (dB) | Detector | Test Result (dBuV/m) | Compliance Limit (dBuV/m) | Margin (dB) | Antenna Height (cm) | Table Azimuth (degree) |
|----------------------|------------------------|----------------|------------------------|----------|----------------------|---------------------------|-------------|---------------------|------------------------|
| H | 2354.3086 | 43.37 | 2.09 | PK | 45.46 | 54 | 8.54 | 120 | 305 |
| | 2389.5791 | 35.55 | 2.07 | PK | 37.62 | 54 | 16.38 | 115 | 200 |
| | 3248.2626 | 49.62 | 0.27 | PK | 49.89 | 87.58 | 37.69 | 135 | 160 |

| Antenna Polarization | Frequency Marker (MHz) | Reading (dBuV) | Correction Factor (dB) | Detector | Test Result (dBuV/m) | Compliance Limit (dBuV/m) | Margin (dB) | Antenna Height (cm) | Table Azimuth (degree) |
|----------------------|------------------------|----------------|------------------------|----------|----------------------|---------------------------|-------------|---------------------|------------------------|
| V | 2354.3086 | 45.79 | 2.09 | PK | 47.88 | 54 | 6.12 | 120 | 305 |
| | 2389.5791 | 36.19 | 2.07 | PK | 38.26 | 54 | 15.74 | 115 | 200 |
| | 3248.2626 | 52.56 | 0.27 | PK | 52.83 | 87.58 | 34.75 | 135 | 160 |

Registration number: W6M20704-7982-C-1
 FCC ID: RXZ-WP61RL

Ch11

| Antenna Polarization | Frequency Marker (MHz) | Reading (dBuV) | Correction Factor (dB) | Detector | Test Result (dBuV/m) | Compliance Limit (dBuV/m) | Margin (dB) | Antenna Height (cm) | Table Azimuth (degree) |
|----------------------|------------------------|----------------|------------------------|----------|----------------------|---------------------------|-------------|---------------------|------------------------|
| H | 2378.3567 | 42.29 | 2.07 | PK | 44.36 | 54 | 9.64 | 100 | 300 |
| | 2483.5000 | 36.74 | -1.11 | PK | 35.63 | 54 | 18.37 | 130 | 260 |
| | 3284.1162 | 43.86 | 0.22 | PK | 44.08 | 87.58 | 43.50 | 150 | 260 |

| Antenna Polarization | Frequency Marker (MHz) | Reading (dBuV) | Correction Factor (dB) | Detector | Test Result (dBuV/m) | Compliance Limit (dBuV/m) | Margin (dB) | Antenna Height (cm) | Table Azimuth (degree) |
|----------------------|------------------------|----------------|------------------------|----------|----------------------|---------------------------|-------------|---------------------|------------------------|
| V | 2375.1703 | 46.15 | 2.07 | PK | 48.22 | 54 | 5.78 | 100 | 300 |
| | 2483.5000 | 36.93 | -1.11 | PK | 35.82 | 54 | 18.18 | 130 | 260 |
| | 3284.1162 | 50.59 | 0.22 | PK | 50.81 | 87.58 | 36.77 | 150 | 260 |

- Note**
1. Correction Factor = Antenna factor + Cable loss - Preamplifier
 2. The formula of measured value as: Test Result = Reading + Correction Factor
 3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
 4. All not in the table noted test results are more than 20 dB below the relevant limits.

Freq. – Frequency Range:

- 1: 30 - 200 MHz
- 2: 200 - 1000 MHz
- 3: 1 - 4 GHz
- 4: 4 - 8 GHz
- 5: 8 - 12 GHz
- 6: 12 - 17 GHz
- 7: 17 - 26.5 GHz

TEST RESULT (Transmitter): The unit DOES meet the FCC requirements.

Test equipment used: ETSTW-RE003 ETSTW-RE 004 ETSTW-RE 017 ETSTW-RE 028
 ETSTW-RE029 ETSTW-RE 030 ETSTW-RE 042 ETSTW-RE 043
 ETSTW-RE 044

Comment: see attached diagrams in Appendix.

Registration number: W6M20704-7982-C-1
 FCC ID: RXZ-WP61RL

3.6 Minimum 6 dB Bandwidth

The analyzer ResBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK reading was taken, two markers were set 6 dB below the maximum level on the right and the left side of the emission. The 6 dB bandwidth is the frequency difference between the two markers.

Mode A

| Test conditions | | 6 dB Bandwidth | | |
|-------------------------|--------------------------|------------------|------------------|------------------|
| | | Channel 1 | Channel 6 | Channel 11 |
| T _{nom} = 23°C | V _{nom} = 3.3 V | 10.929487179 MHz | 10.929487179 MHz | 10.961538462 MHz |

Mode B

| Test conditions | | 6 dB Bandwidth | | |
|-------------------------|--------------------------|------------------|------------------|------------------|
| | | Channel 1 | Channel 6 | Channel 11 |
| T _{nom} = 23°C | V _{nom} = 3.3 V | 16.602564103 MHz | 16.602564103 MHz | 16.602564103 MHz |

Limits:

| Frequency Range MHz | Limits |
|------------------------|-------------|
| 902-928 | min 500 kHz |
| 2400-2483.5 | min 500 kHz |
| 5725-5850 | min 500 kHz |

Test equipment used: ETSTW-RE 003 ETSTW-RE 004 ETSTW-RE 055

Comment: see attached diagrams in Appendix.

Registration number: W6M20704-7982-C-1
 FCC ID: RXZ-WP61RL

3.7 Peak Power Spectral Density

Peak Power Spectral density is a measured at low, middle and high channel.
 The peak output power is measured with a measurement bandwidth of 10 MHz and displayed on diagram together with Peak Power Spectral Density result which was measured with a bandwidth of 3 kHz, appreciate frequency span and sweep time.

Mode A

| Test conditions | | Peak Power Spectral Density (3 kHz) | | |
|-------------------------|---------------------------|-------------------------------------|--------------------|---------------------|
| | | Channel 1 [dBm] | Channel 6 [dBm] | Channel 11 [dBm] |
| $T_{nom} = 23^{\circ}C$ | $V_{nom} = 3.3 \text{ V}$ | -15.51 | -13.98 | -13.57 |

Mode B

| Test conditions | | Peak Power Spectral Density (3 kHz) | | |
|-------------------------|---------------------------|-------------------------------------|--------------------|---------------------|
| | | Channel 1 [dBm] | Channel 6 [dBm] | Channel 11 [dBm] |
| $T_{nom} = 23^{\circ}C$ | $V_{nom} = 3.3 \text{ V}$ | -22.30 | -21.82 | -21.45 |

Limits:

| Frequency Range MHz | dBm |
|------------------------|-----|
| 902-928 | 8 |
| 2400-2483,5 | 8 |
| 5725-5850 | 8 |

Test equipment used: ETSTW-RE 003 ETSTW-RE 004 ETSTW-RE 055

Comment: see attached diagrams in Appendix.

Registration number: W6M20704-7982-C-1
 FCC ID: RXZ-WP61RL

3.8 Radiated Emission from Digital Part And Receiver L.O.

FCC Rule: 15.109

Receiver

**Mode A
 CH 1**

| Antenna Polarization | Frequency Marker (MHz) | Reading (dBuV) | Correction Factor (dB) | Detector | Test Result (dBuV/m) | Compliance Limit (dBuV/m) | Margin (dB) | Antenna Height (cm) | Table Azimuth (degree) |
|----------------------|------------------------|----------------|------------------------|----------|----------------------|---------------------------|-------------|---------------------|------------------------|
| H | 240.0800 | 25.21 | 13.21 | PK | 38.42 | 46 | 7.58 | 305 | 170 |
| | 3218.2749 | 38.90 | 0.34 | PK | 39.24 | 54 | 14.76 | 125 | 200 |
| | 6436.7488 | 39.84 | 5.94 | PK | 45.78 | 54 | 8.22 | 140 | 305 |

| Antenna Polarization | Frequency Marker (MHz) | Reading (dBuV) | Correction Factor (dB) | Detector | Test Result (dBuV/m) | Compliance Limit (dBuV/m) | Margin (dB) | Antenna Height (cm) | Table Azimuth (degree) |
|----------------------|------------------------|----------------|------------------------|----------|----------------------|---------------------------|-------------|---------------------|------------------------|
| V | 878.1560 | 11.98 | 26.31 | PK | 38.29 | 46 | 7.71 | 315 | 100 |
| | 3218.2749 | 43.02 | 0.34 | PK | 43.36 | 54 | 10.64 | 125 | 200 |
| | 6436.7488 | 43.66 | 5.94 | PK | 49.60 | 54 | 4.40 | 140 | 305 |

CH 6

| Antenna Polarization | Frequency Marker (MHz) | Reading (dBuV) | Correction Factor (dB) | Detector | Test Result (dBuV/m) | Compliance Limit (dBuV/m) | Margin (dB) | Antenna Height (cm) | Table Azimuth (degree) |
|----------------------|------------------------|----------------|------------------------|----------|----------------------|---------------------------|-------------|---------------------|------------------------|
| H | 240.0800 | 24.69 | 13.21 | PK | 37.90 | 46 | 8.10 | 305 | 170 |
| | 3248.2626 | 36.39 | 0.27 | PK | 36.66 | 54 | 17.34 | 120 | 185 |
| | 7800.1248 | 38.77 | 7.64 | PK | 46.41 | 54 | 7.59 | 135 | 210 |

| Antenna Polarization | Frequency Marker (MHz) | Reading (dBuV) | Correction Factor (dB) | Detector | Test Result (dBuV/m) | Compliance Limit (dBuV/m) | Margin (dB) | Antenna Height (cm) | Table Azimuth (degree) |
|----------------------|------------------------|----------------|------------------------|----------|----------------------|---------------------------|-------------|---------------------|------------------------|
| V | 1000.0000 | 9.46 | 28.02 | PK | 37.48 | 54 | 16.52 | 310 | 200 |
| | 3248.2626 | 42.13 | 0.27 | PK | 42.40 | 54 | 11.60 | 120 | 185 |
| | 6501.0704 | 42.63 | 6.16 | PK | 48.79 | 54 | 5.21 | 115 | 140 |

Registration number: W6M20704-7982-C-1
 FCC ID: RXZ-WP61RL

CH 11

| Antenna Polarization | Frequency Marker (MHz) | Reading (dBUV) | Correction Factor (dB) | Detector | Test Result (dBUV/m) | Compliance Limit (dBUV/m) | Margin (dB) | Antenna Height (cm) | Table Azimuth (degree) |
|----------------------|------------------------|----------------|------------------------|----------|----------------------|---------------------------|-------------|---------------------|------------------------|
| H | 240.0800 | 24.71 | 13.21 | PK | 37.92 | 46 | 8.08 | 300 | 180 |
| | 3284.5887 | 36.46 | 0.22 | PK | 36.68 | 54 | 17.32 | 110 | 270 |
| | 7631.2826 | 39.19 | 7.14 | PK | 46.33 | 54 | 7.67 | 125 | 200 |

| Antenna Polarization | Frequency Marker (MHz) | Reading (dBUV) | Correction Factor (dB) | Detector | Test Result (dBUV/m) | Compliance Limit (dBUV/m) | Margin (dB) | Antenna Height (cm) | Table Azimuth (degree) |
|----------------------|------------------------|----------------|------------------------|----------|----------------------|---------------------------|-------------|---------------------|------------------------|
| V | 799.5990 | 11.29 | 25.67 | PK | 36.96 | 46 | 9.04 | 310 | 105 |
| | 3284.5887 | 41.10 | 0.22 | PK | 41.32 | 54 | 12.68 | 110 | 270 |
| | 7743.4650 | 38.87 | 7.63 | PK | 46.50 | 54 | 7.50 | 120 | 240 |

**Mode B
 CH 1**

| Antenna Polarization | Frequency Marker (MHz) | Reading (dBUV) | Correction Factor (dB) | Detector | Test Result (dBUV/m) | Compliance Limit (dBUV/m) | Margin (dB) | Antenna Height (cm) | Table Azimuth (degree) |
|----------------------|------------------------|----------------|------------------------|----------|----------------------|---------------------------|-------------|---------------------|------------------------|
| H | 240.0800 | 25.21 | 13.21 | PK | 38.42 | 46 | 7.58 | 305 | 170 |
| | 3218.2749 | 38.50 | 0.34 | PK | 38.84 | 54 | 15.16 | 125 | 200 |
| | 6437.0202 | 38.94 | 5.94 | PK | 44.88 | 54 | 9.12 | 140 | 305 |

| Antenna Polarization | Frequency Marker (MHz) | Reading (dBUV) | Correction Factor (dB) | Detector | Test Result (dBUV/m) | Compliance Limit (dBUV/m) | Margin (dB) | Antenna Height (cm) | Table Azimuth (degree) |
|----------------------|------------------------|----------------|------------------------|----------|----------------------|---------------------------|-------------|---------------------|------------------------|
| V | 878.1560 | 11.90 | 26.31 | PK | 38.21 | 46 | 7.79 | 315 | 100 |
| | 3218.2749 | 42.82 | 0.34 | PK | 43.16 | 54 | 10.84 | 125 | 200 |
| | 6437.0202 | 44.19 | 5.94 | PK | 50.13 | 54 | 3.87 | 140 | 305 |

CH 6

| Antenna Polarization | Frequency Marker (MHz) | Reading (dBUV) | Correction Factor (dB) | Detector | Test Result (dBUV/m) | Compliance Limit (dBUV/m) | Margin (dB) | Antenna Height (cm) | Table Azimuth (degree) |
|----------------------|------------------------|----------------|------------------------|----------|----------------------|---------------------------|-------------|---------------------|------------------------|
| H | 879.7600 | 12.68 | 26.31 | PK | 38.99 | 46 | 7.01 | 315 | 100 |
| | 3248.2626 | 36.43 | 0.27 | PK | 36.70 | 54 | 17.30 | 120 | 185 |
| | 6501.1122 | 37.70 | 6.16 | PK | 43.86 | 54 | 10.14 | 115 | 140 |

Registration number: W6M20704-7982-C-1
 FCC ID: RXZ-WP61RL

| Antenna Polarization | Frequency Marker (MHz) | Reading (dBUV) | Correction Factor (dB) | Detector | Test Result (dBUV/m) | Compliance Limit (dBUV/m) | Margin (dB) | Antenna Height (cm) | Table Azimuth (degree) |
|----------------------|------------------------|----------------|------------------------|----------|----------------------|---------------------------|-------------|---------------------|------------------------|
| V | 1000.0000 | 10.78 | 28.02 | PK | 38.80 | 54 | 15.20 | 310 | 210 |
| | 3248.2626 | 41.61 | 0.27 | PK | 41.88 | 54 | 12.12 | 120 | 185 |
| | 6501.1122 | 40.08 | 6.16 | PK | 46.24 | 54 | 7.76 | 115 | 140 |

CH 11

| Antenna Polarization | Frequency Marker (MHz) | Reading (dBUV) | Correction Factor (dB) | Detector | Test Result (dBUV/m) | Compliance Limit (dBUV/m) | Margin (dB) | Antenna Height (cm) | Table Azimuth (degree) |
|----------------------|------------------------|----------------|------------------------|----------|----------------------|---------------------------|-------------|---------------------|------------------------|
| H | 878.1560 | 11.01 | 26.31 | PK | 37.32 | 46 | 8.68 | 315 | 100 |
| | 3284.5887 | 36.59 | 0.22 | PK | 36.81 | 54 | 17.19 | 110 | 270 |
| | 7832.2426 | 38.57 | 7.54 | PK | 46.11 | 54 | 7.89 | 115 | 245 |

| Antenna Polarization | Frequency Marker (MHz) | Reading (dBUV) | Correction Factor (dB) | Detector | Test Result (dBUV/m) | Compliance Limit (dBUV/m) | Margin (dB) | Antenna Height (cm) | Table Azimuth (degree) |
|----------------------|------------------------|----------------|------------------------|----------|----------------------|---------------------------|-------------|---------------------|------------------------|
| V | 799.5990 | 11.23 | 25.67 | PK | 36.90 | 46 | 9.10 | 310 | 105 |
| | 3284.5887 | 41.22 | 0.22 | PK | 41.44 | 54 | 12.56 | 110 | 270 |
| | 6567.2488 | 41.00 | 5.88 | PK | 46.88 | 54 | 7.12 | 120 | 205 |

Digital

| Antenna Polarization | Frequency Marker (MHz) | Reading (dBUv) | Correction Factor (dB) | Detector | Test Result (dBUV/m) | Compliance Limit (dBUV/m) | Margin (dB) | Table Azimuth (degree) | Antenna Height (cm) |
|----------------------|------------------------|----------------|------------------------|----------|----------------------|---------------------------|-------------|------------------------|---------------------|
| V | 177.8560 | 12.54 | 13.49 | PK | 26.03 | 30 | 3.97 | 330 | 260 |
| | 357.1140 | 12.82 | 16.67 | PK | 29.49 | 37 | 7.51 | 130 | 170 |
| | 1000.0000 | 1.52 | 28.02 | PK | 29.54 | 37 | 7.46 | 125 | 200 |

| Antenna Polarization | Frequency Marker (MHz) | Reading (dBUv) | Correction Factor (dB) | Detector | Test Result (dBUV/m) | Compliance Limit (dBUV/m) | Margin (dB) | Table Azimuth (degree) | Antenna Height (cm) |
|----------------------|------------------------|----------------|------------------------|----------|----------------------|---------------------------|-------------|------------------------|---------------------|
| H | 39.5390 | 13.03 | 12.85 | PK | 25.88 | 30 | 4.12 | 125 | 240 |
| | 313.8280 | 17.40 | 15.60 | PK | 33.00 | 37 | 4.00 | 310 | 175 |
| | 996.7930 | 4.28 | 28.00 | PK | 32.28 | 37 | 4.72 | 325 | 200 |

- Note**
1. Correction Factor = Antenna factor + Cable loss - Preamplifier
 2. The formula of measured value as: Test Result = Reading + Correction Factor
 3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
 4. All not in the table noted test results are more than 20 dB below the relevant limits.

Registration number: W6M20704-7982-C-1
FCC ID: RXZ-WP61RL

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

| Frequency of Emission (MHz) | Field Strength (microvolts/meter) | Field Strength (dBmicrovolts/meter) |
|--------------------------------|--------------------------------------|--|
| 30 – 88 | 100 | 40.0 |
| 88 – 216 | 150 | 43.5 |
| 216 – 960 | 200 | 46.0 |
| Above 960 | 500 | 54.0 |

Test equipment used: ETSTW-RE 003 ETSTW-RE 004 ETSTW-RE 017 ETSTW-RE 028
ETSTW-RE 029 ETSTW-RE 030 ETSTW-RE 042 ETSTW-RE 043
ETSTW-RE 044

Comment: see attached diagrams in Appendix.

Registration number: W6M20704-7982-C-1
 FCC ID: RXZ-WP61RL

3.9 Power Line Conducted Emission

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

| Frequency | Level (dBμV) | |
|-----------|------------------|------------------|
| | quasi-peak | average |
| 150 kHz | lower limit line | Lower limit line |

| LISN type | Frequency Marker | Reading (dBuV) | | Correction Factor | Test Result (dBuV) | | Compliance Limit (dBuV) | | Margin (dB) | |
|-----------|------------------|----------------|-------|-------------------|--------------------|-------|-------------------------|-------|-------------|-------|
| | | QP | AV | | dB | QP | AV | QP | AV | QP |
| N | MHz | QP | AV | dB | QP | AV | QP | AV | QP | AV |
| | 0.195 | 30.59 | 27.61 | 10.10 | 40.69 | 37.71 | 63.82 | 53.82 | 23.13 | 16.11 |
| | 1.070 | 34.53 | 30.12 | 10.10 | 44.63 | 40.22 | 56.00 | 46.00 | 11.37 | 5.78 |
| | 14.195 | 36.56 | 18.84 | 10.10 | 46.66 | 28.94 | 60.00 | 50.00 | 13.34 | 21.06 |

| LISN type | Frequency Marker | Reading (dBuV) | | Correction Factor | Test Result (dBuV) | | Compliance Limit (dBuV) | | Margin (dB) | |
|-----------|------------------|----------------|-------|-------------------|--------------------|-------|-------------------------|-------|-------------|-------|
| | | QP | AV | | dB | QP | AV | QP | AV | QP |
| L1 | MHz | QP | AV | dB | QP | AV | QP | AV | QP | AV |
| | 0.195 | 27.70 | 24.19 | 10.10 | 37.80 | 34.29 | 63.82 | 53.82 | 26.02 | 19.53 |
| | 1.460 | 33.91 | 31.60 | 10.10 | 44.01 | 41.70 | 56.00 | 46.00 | 11.99 | 4.30 |
| | 14.205 | 37.38 | 19.03 | 10.10 | 47.48 | 29.13 | 60.00 | 50.00 | 12.52 | 20.87 |

- Note 1. The formula of measured value as: Test Result = Reading + Correction Factor**
2. The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss
3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
4. All not in the table noted test results are more than 20 dB below the relevant limits.

Registration number: W6M20704-7982-C-1
FCC ID: RXZ-WP61RL

Limits:

| Frequency of Emission (MHz) | Conducted Limit (dBuV) | |
|-----------------------------|------------------------|----------|
| | Quasi Peak | Average |
| 0.15-0.5 | 66 to 56 | 56 to 46 |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

Test equipment used: ETSTW-CE 001 ETSTW-CE 003 ETSTW-CE 004 ETSTW-CE 006
ETSTW-CE 011

Comment: see attached diagrams in Appendix.

Registration number: W6M20704-7982-C-1
FCC ID: RXZ-WP61RL

Appendix

A Measurement diagrams

1. Peak Output Power

2. Spurious Emissions radiated

(The measurement diagrams plots attached below are preliminary wideband scan with a peak detector for reference only. The final test results are listed on section 3.5)

3. Band Edge Measurement

4. Minimum 6dB Bandwidth

5. Peak Power Spectral Density

6. Radiated Emissions from Receiver Section of Transceiver

(The measurement diagrams plots attached below are preliminary wideband scan with a peak detector for reference only. The final test results are listed on section 3.8)

7. Power Line Conducted Emission

(The measurement diagrams plots attached below are preliminary wideband scan with a peak and average detector for reference only. The final test results are listed on section 3.9)

B Photos

1. External Photos


2. Internal Photos

3. Set Up Photo of Radiated Emission

4. Set Up Photo of Conducted Emission




Ref 30 dBm *Att 30 dB *RBW 20 MHz Marker 1 [T1]
*VBW 10 MHz 15.58 dBm
*SWT 200 ms 2.437448718 GHz

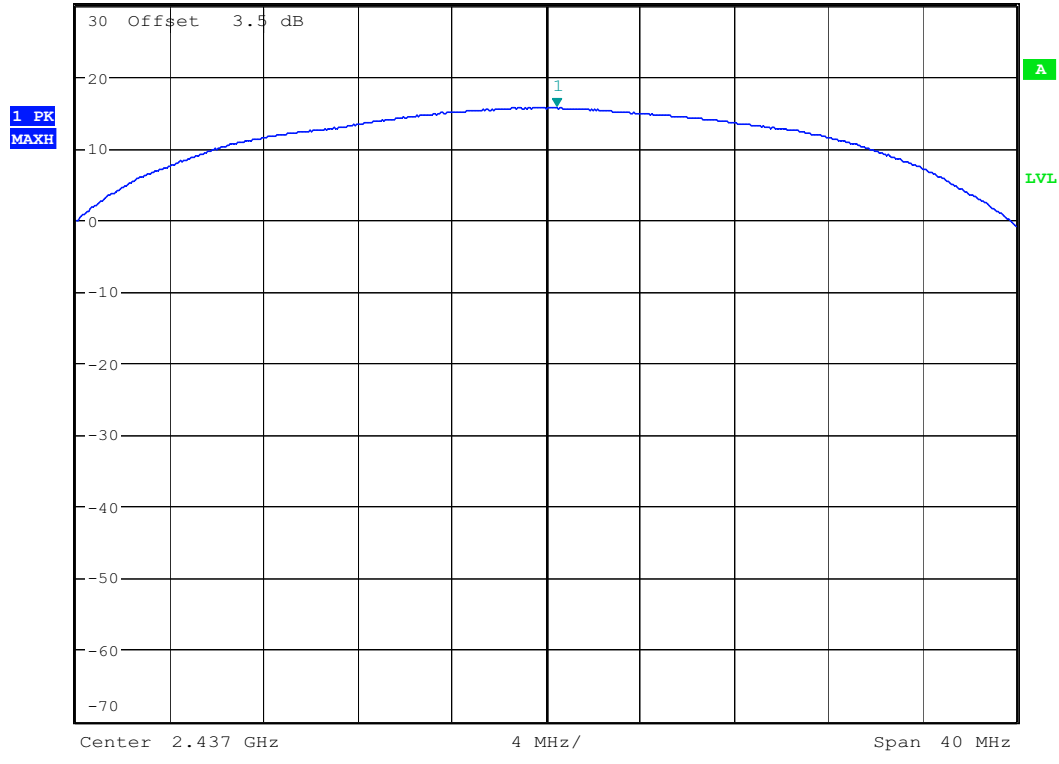

Max output power 802.11b 2437MHz
Date: 16.APR.2007 10:00:46



Ref 30 dBm *Att 30 dB *RBW 20 MHz Marker 1 [T1]
*VBW 10 MHz 16.07 dBm
*SWT 200 ms 2.461615385 GHz

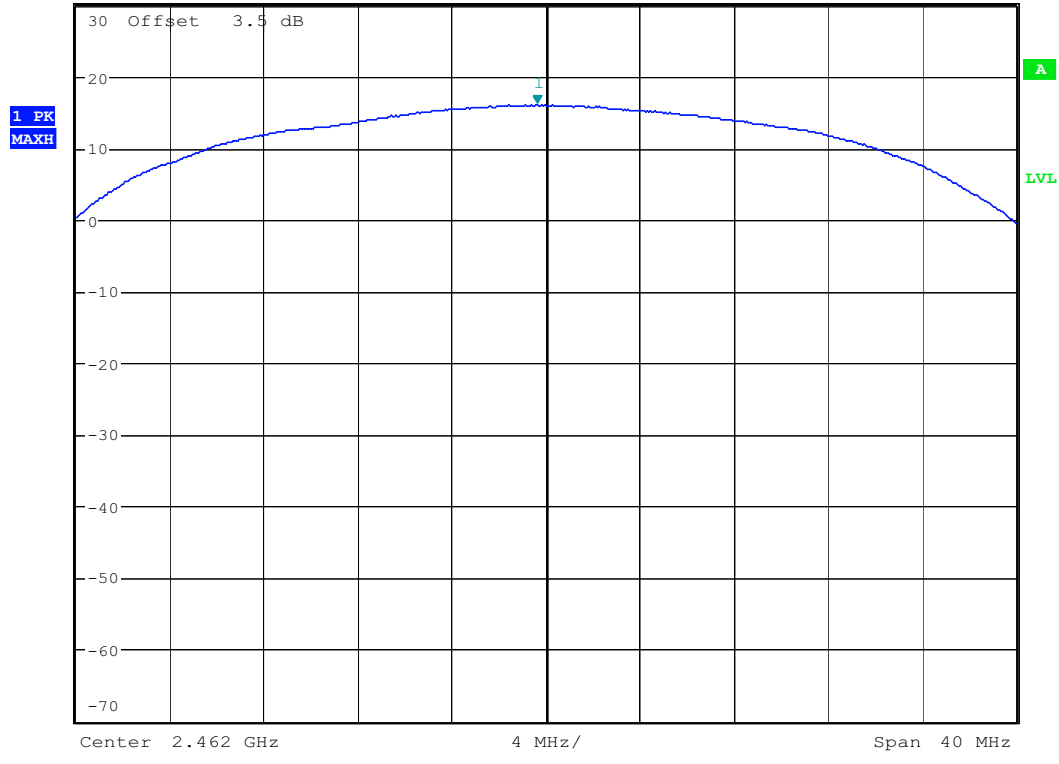


Max output power 802.11b 2462MHz
Date: 16.APR.2007 10:02:39



*RBW 20 MHz
*VBW 10 MHz
*SWT 200 ms
Marker 1 [T1]
14.43 dBm
2.413666667 GHz

Ref 30 dBm *Att 30 dB

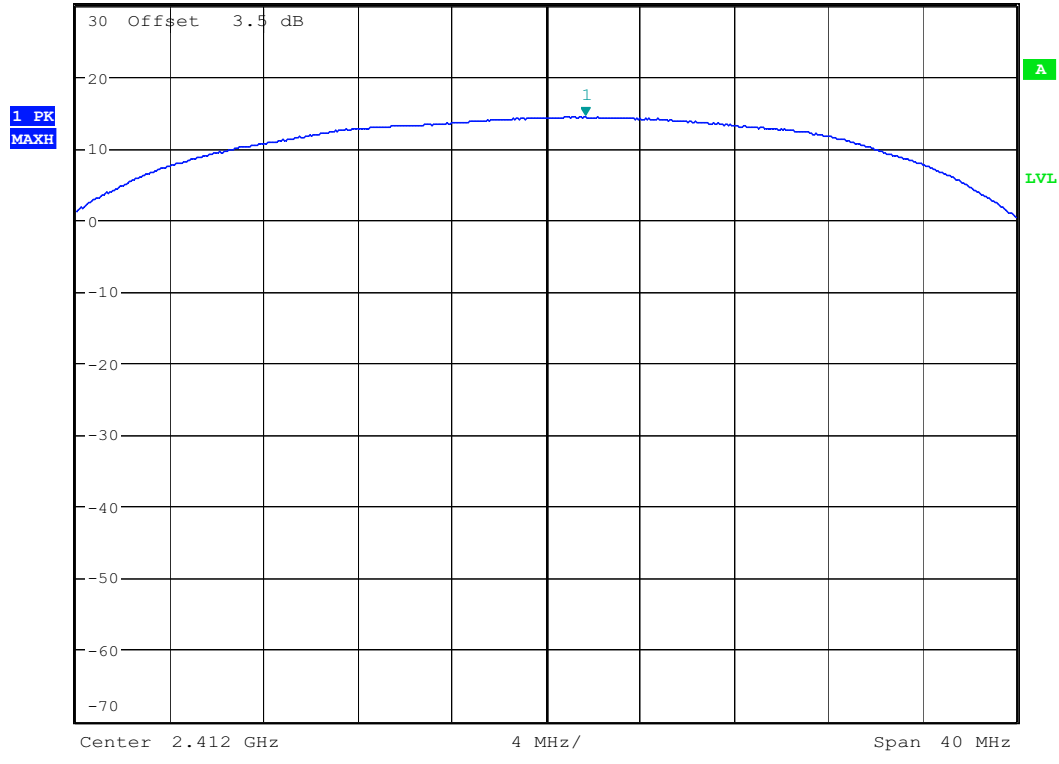


Max output power 802.11g 2412MHz

Date: 16.APR.2007 10:06:06




Ref 30 dBm *Att 30 dB *RBW 20 MHz Marker 1 [T1]
*VBW 10 MHz 14.96 dBm
*SWT 200 ms 2.438089744 GHz

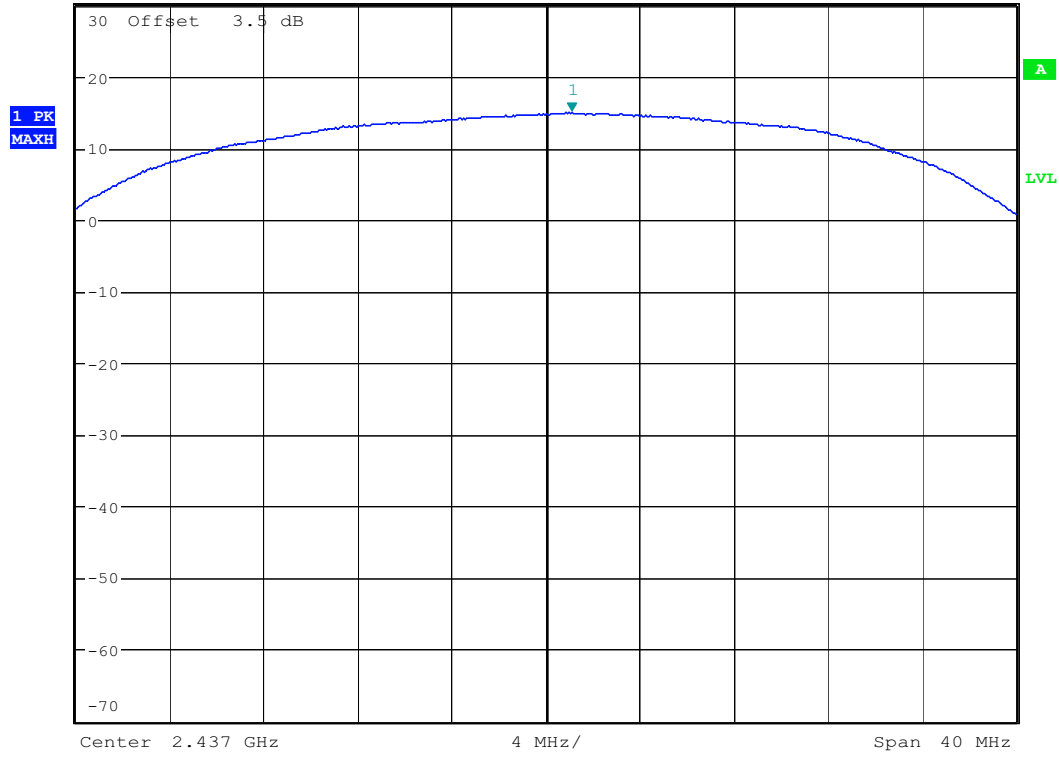

Max output power 802.11g 2437MHz
Date: 16.APR.2007 10:05:35



Ref 30 dBm *Att 30 dB *RBW 20 MHz Marker 1 [T1]
*VBW 10 MHz 15.34 dBm
*SWT 200 ms 2.463217949 GHz

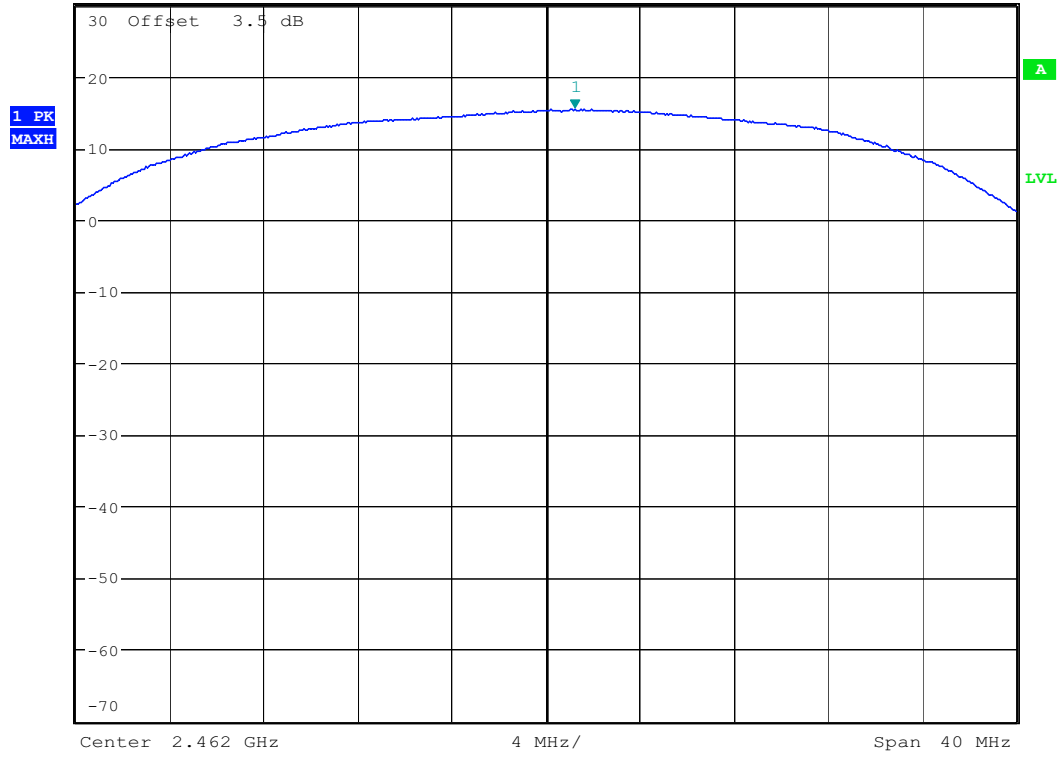


Max output power 802.11g 2462MHz

Date: 16.APR.2007 10:04:46

Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025
Freq: 2.413GHz, Emax: 102.07dBμV/m, RBW: 1MHz

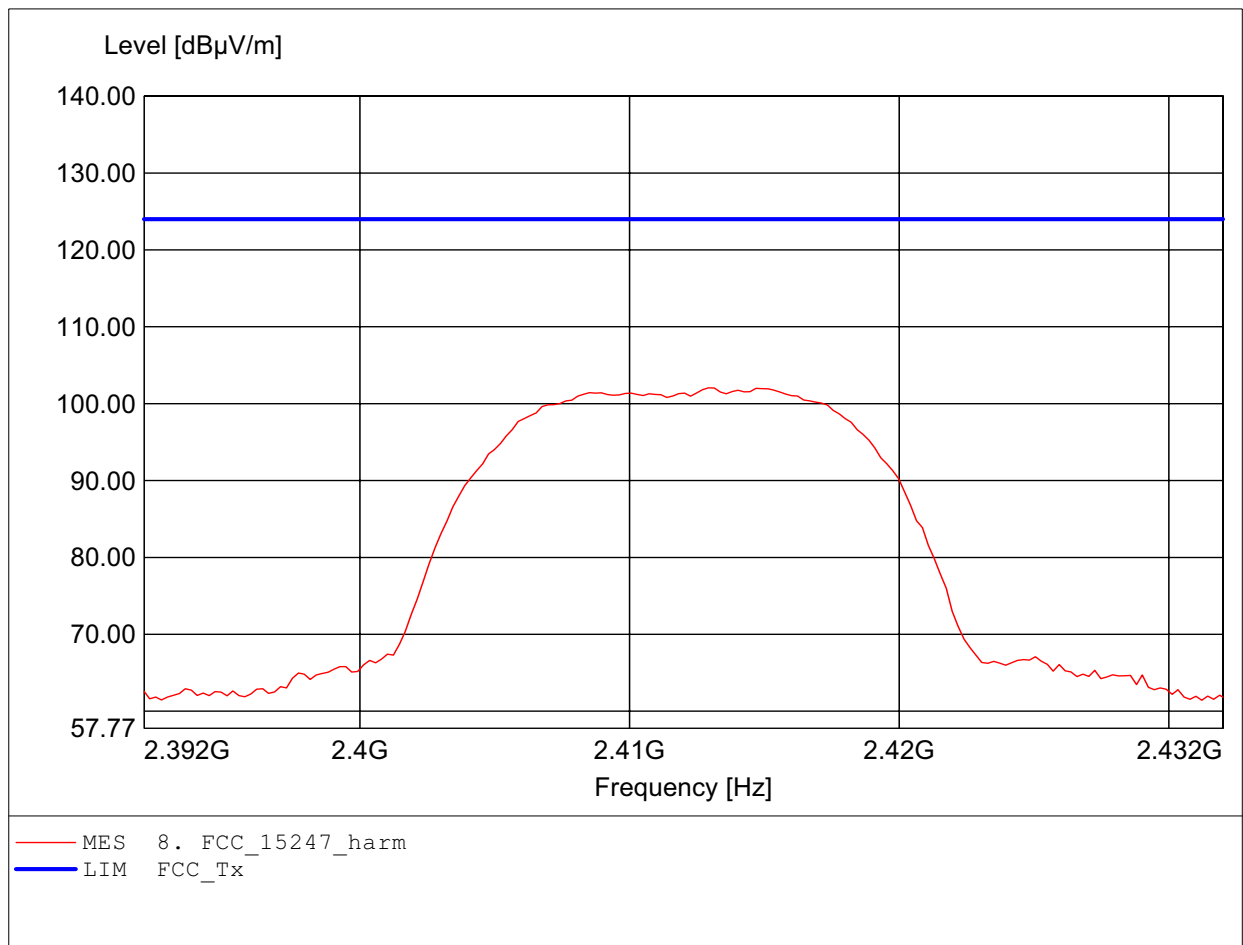

Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025
Freq: 2.415GHz, Emax: 112.24dBμV/m, RBW: 1MHz

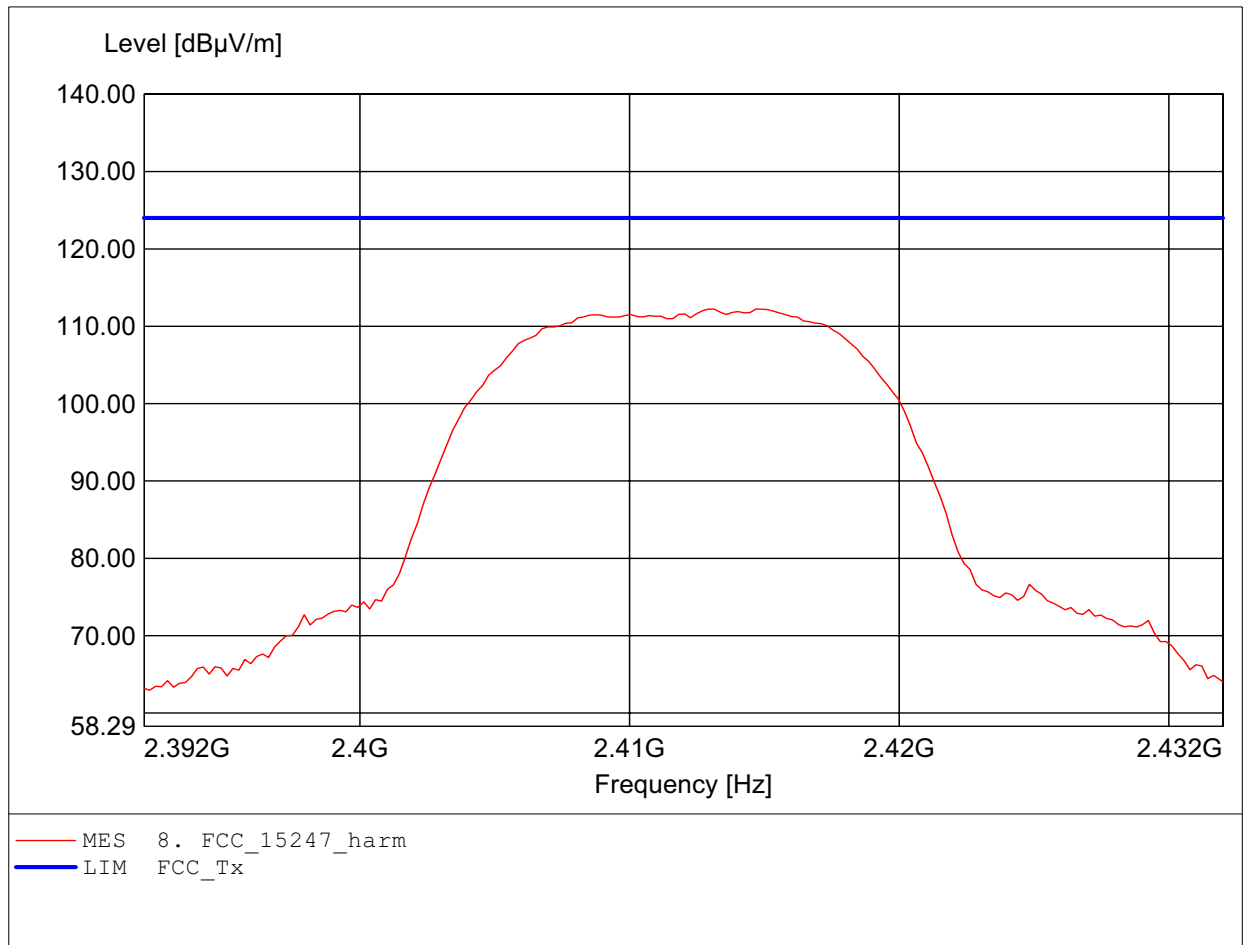

Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025
Freq: 2.438GHz, Emax: 102.67dBμV/m, RBW: 1MHz

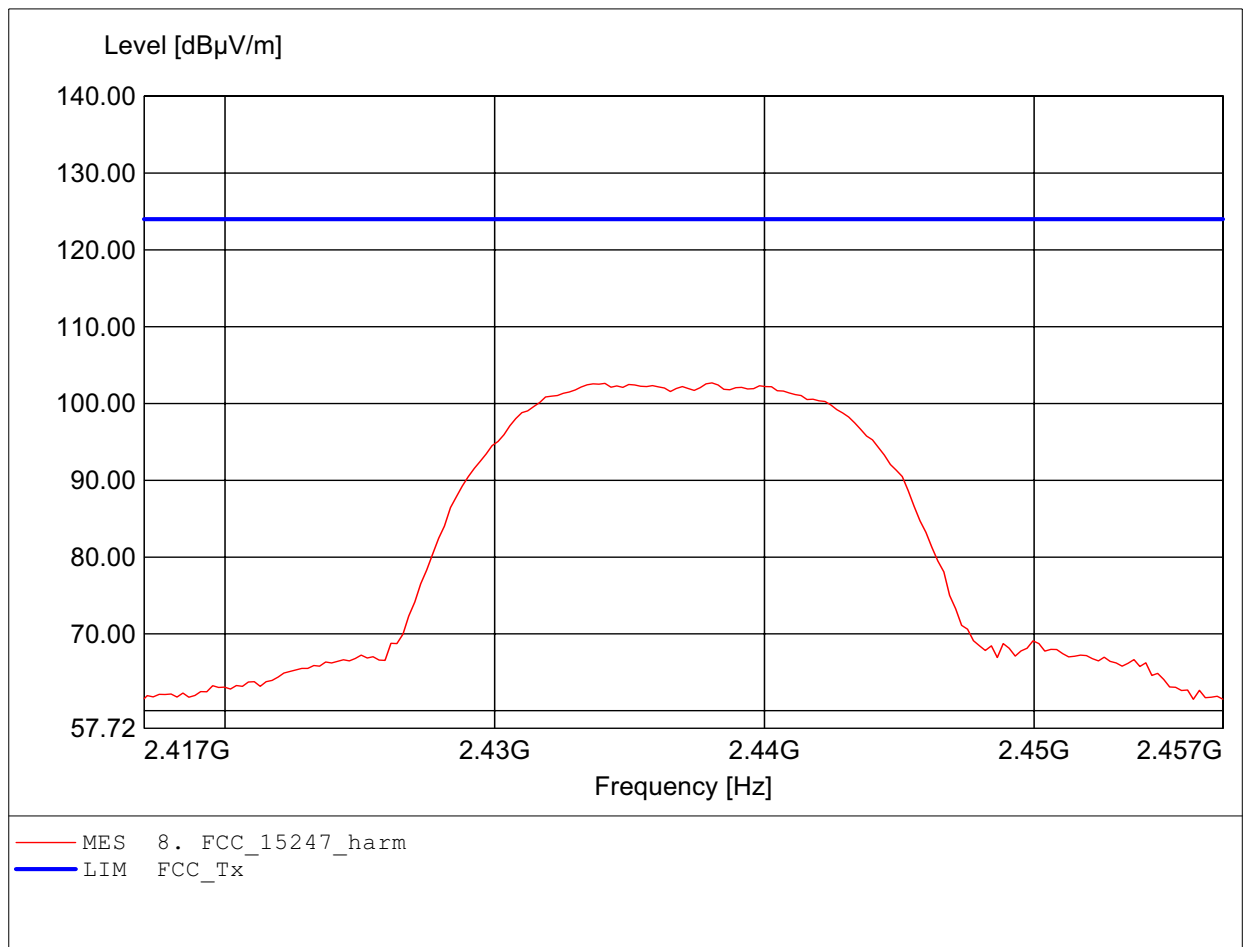

Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b 5
Test Site / Operator: ES / Derek
Temperature: Temp.: 23.9C
Comment 1: Ant.: H025
Freq 2.438GHz, Max 112.31dBμV/m, RBW: 1MHz

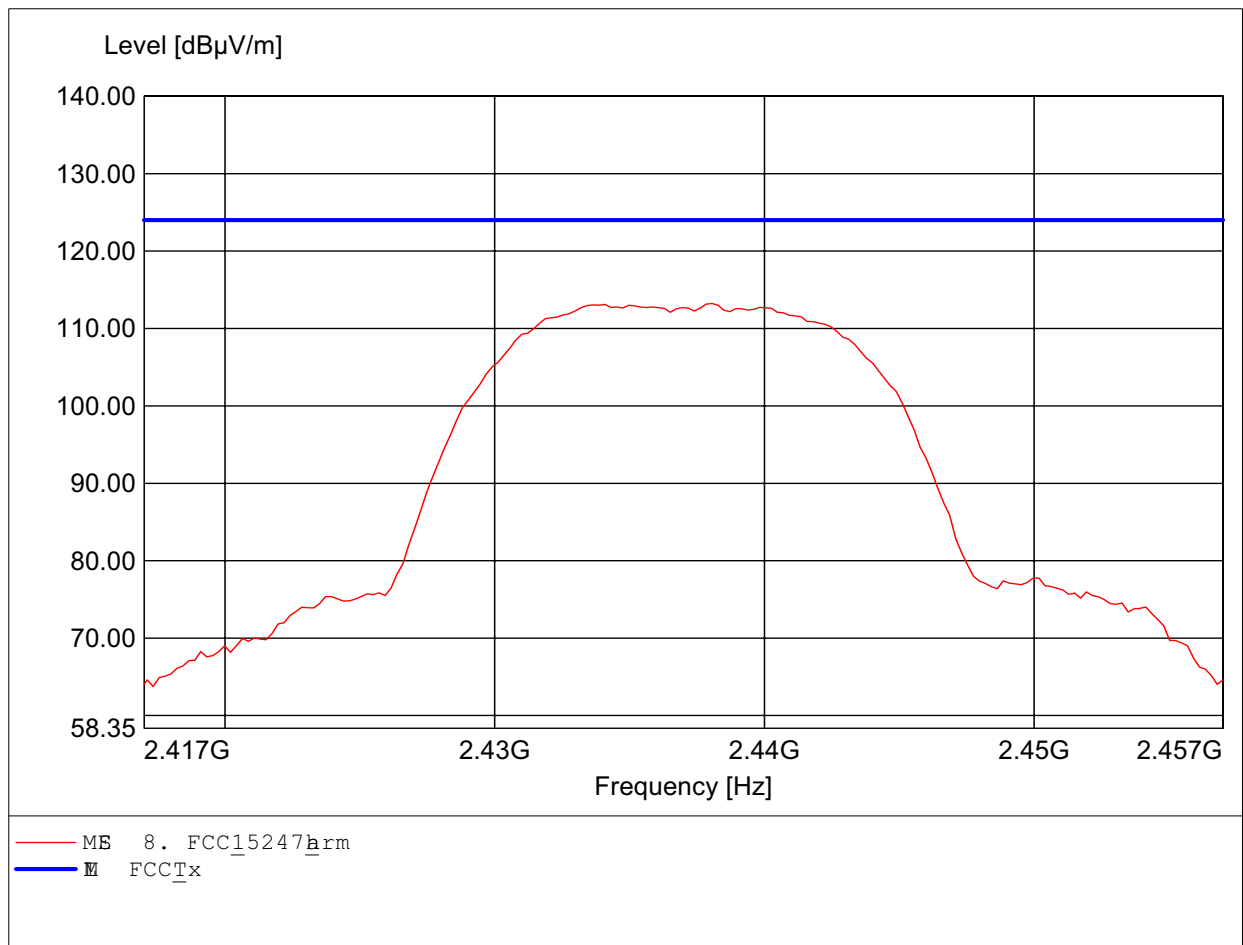

Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025
Freq: 2.463GHz, Emax: 103.98dBµV/m, RBW: 1MHz

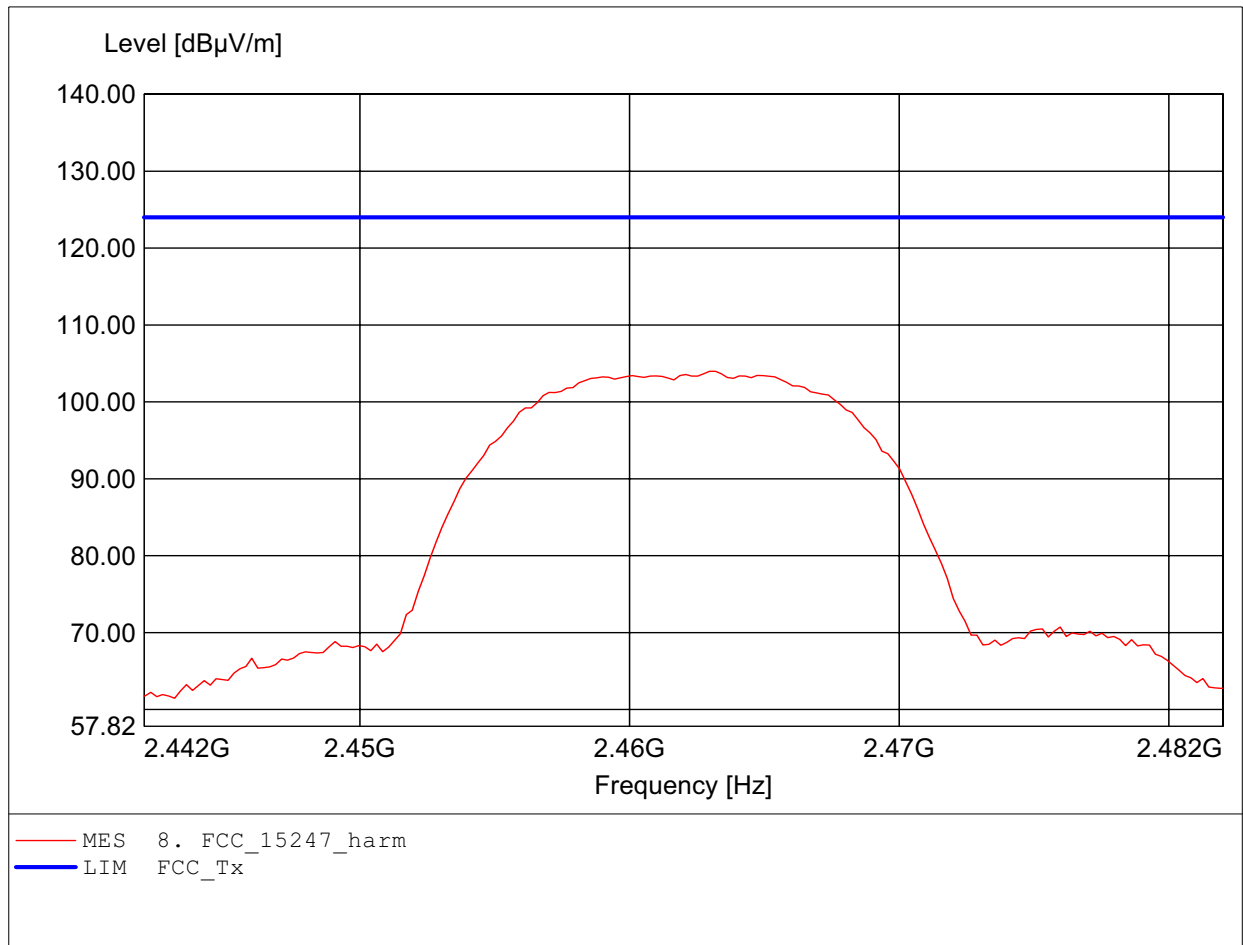

Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025
Freq: 2.463GHz, Emax: 112.47dBμV/m, RBW: 1MHz

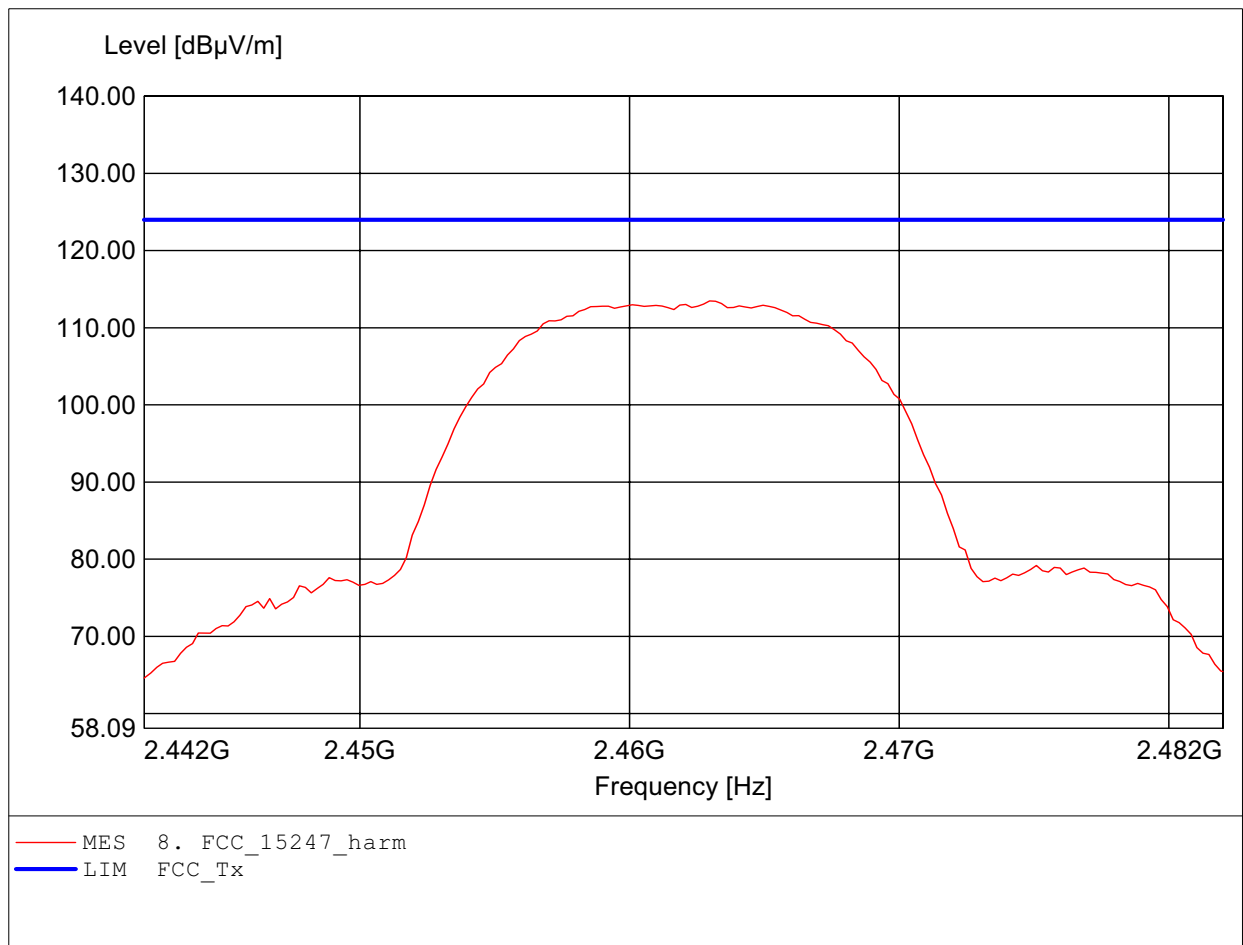

Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025
Freq: 2.419GHz, Emax: 98.49dBµV/m, RBW: 1MHz

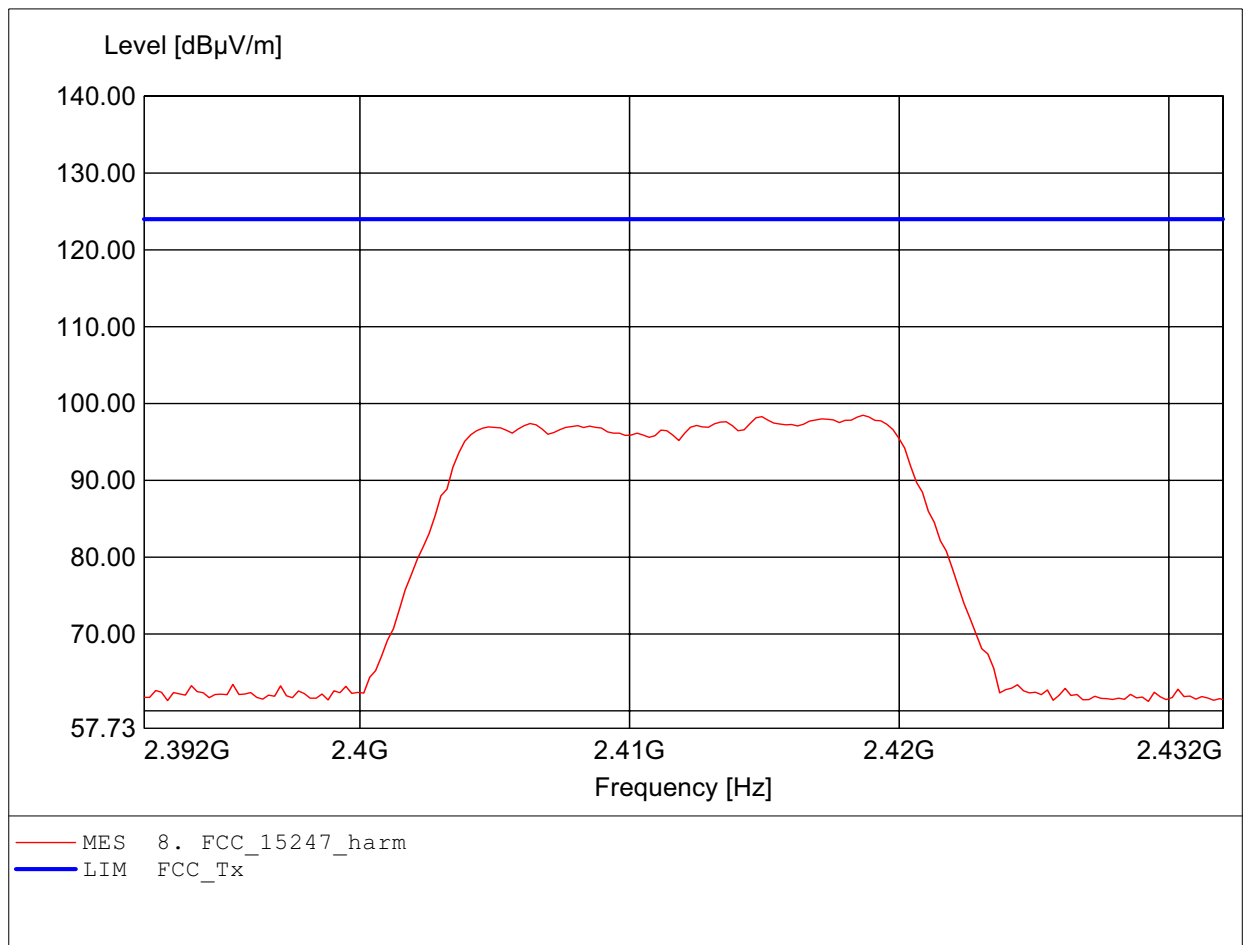

Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025
Freq: 2.419GHz, Emax: 106.90dBμV/m, RBW: 1MHz

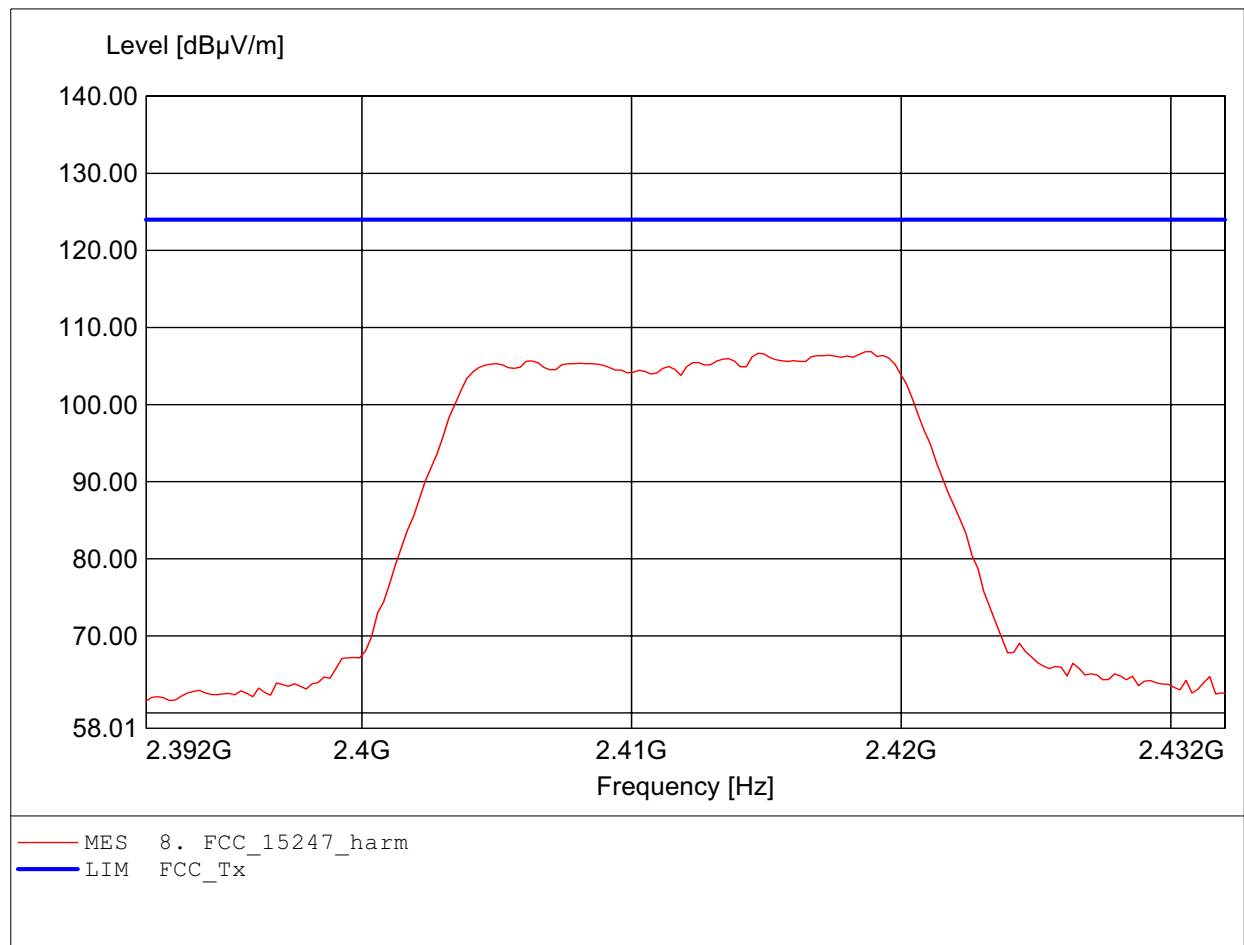

Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025
Freq: 2.444GHz, Emax: 98.61dBµV/m, RBW: 1MHz

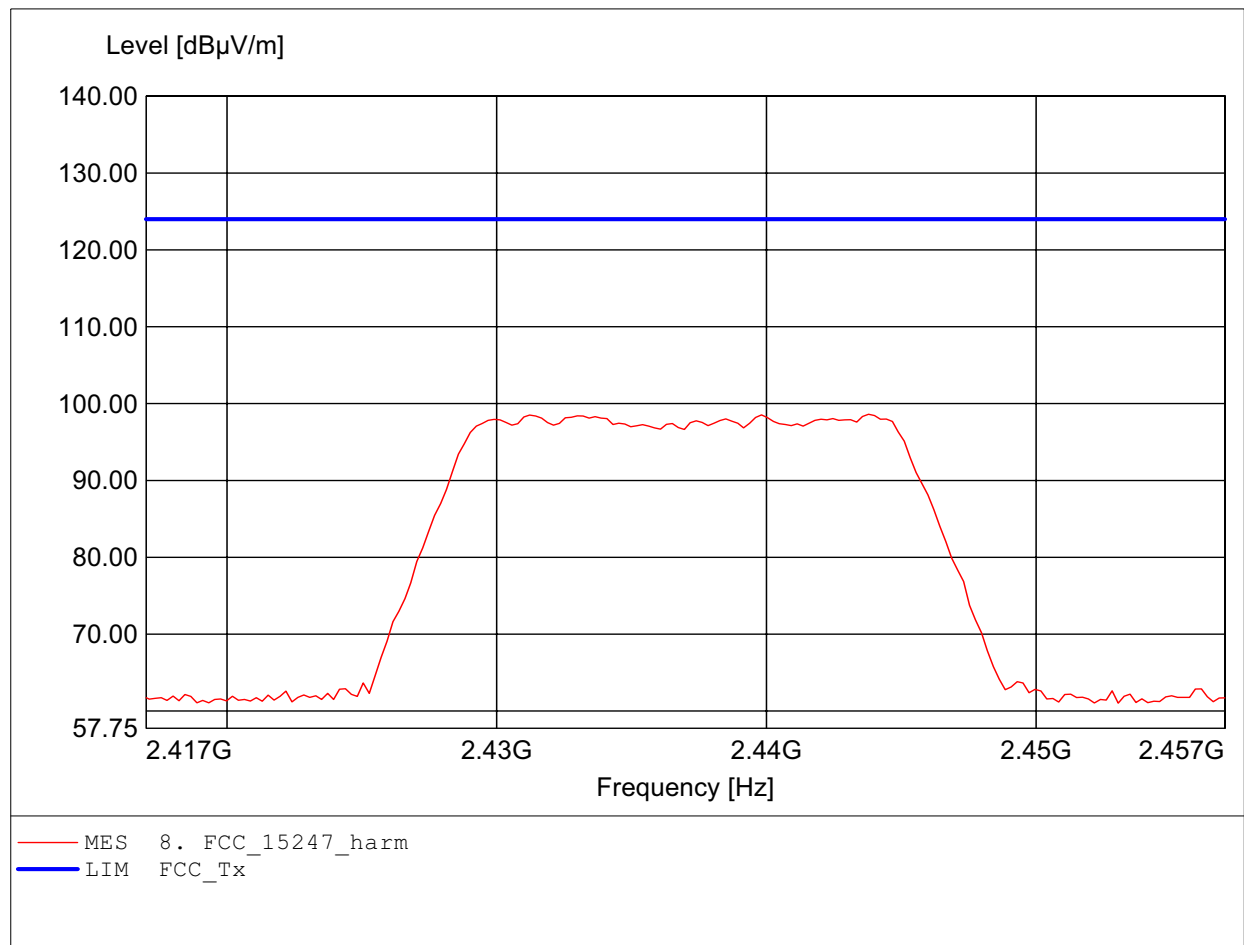

Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025
Freq: 2.444GHz, Emax: 107.52dBµV/m, RBW: 1MHz

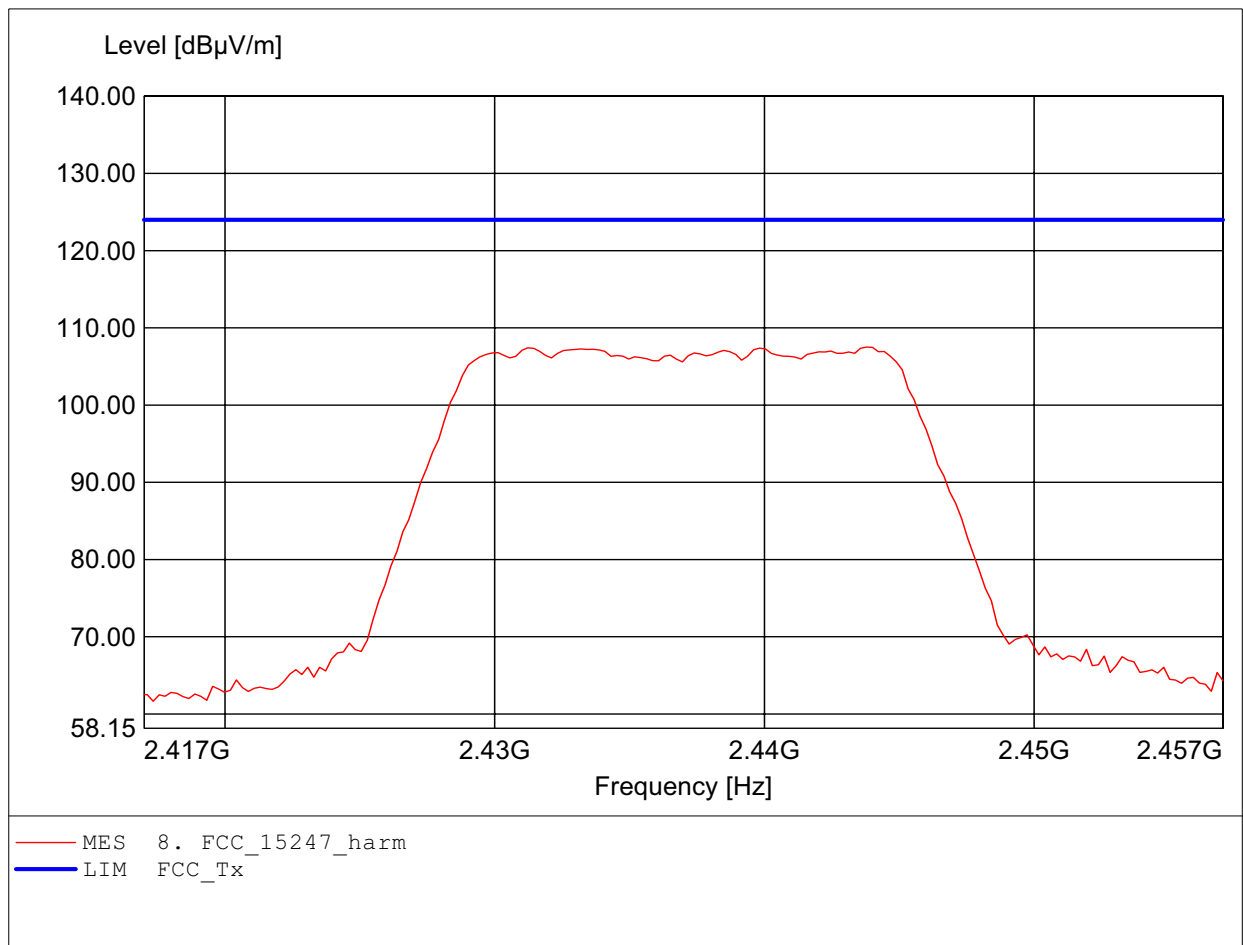

Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025
Freq: 2.465GHz, Emax: 99.02dBμV/m, RBW: 1MHz

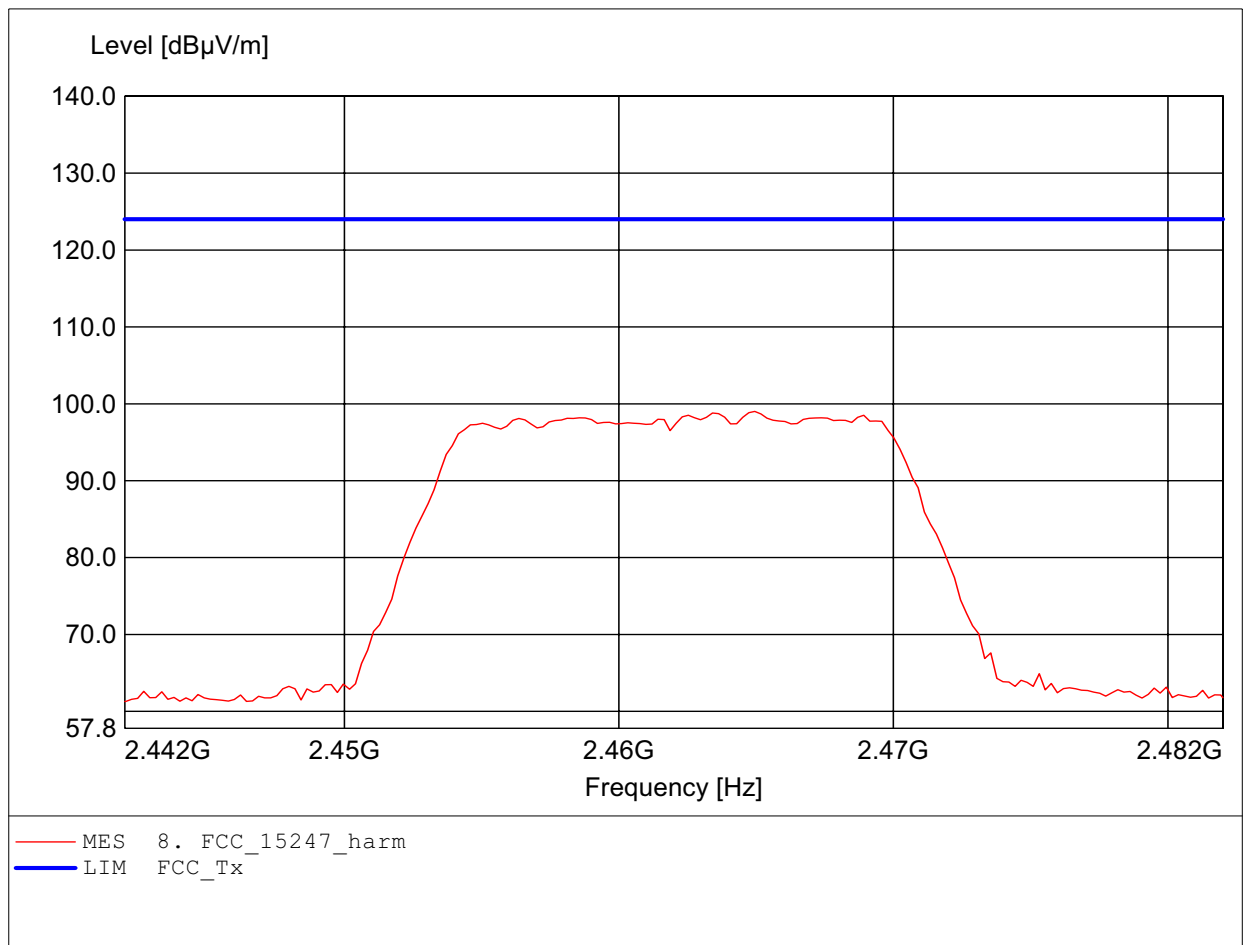

Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025
Freq: 2.465GHz, Emax: 107.58dBμV/m, RBW: 1MHz

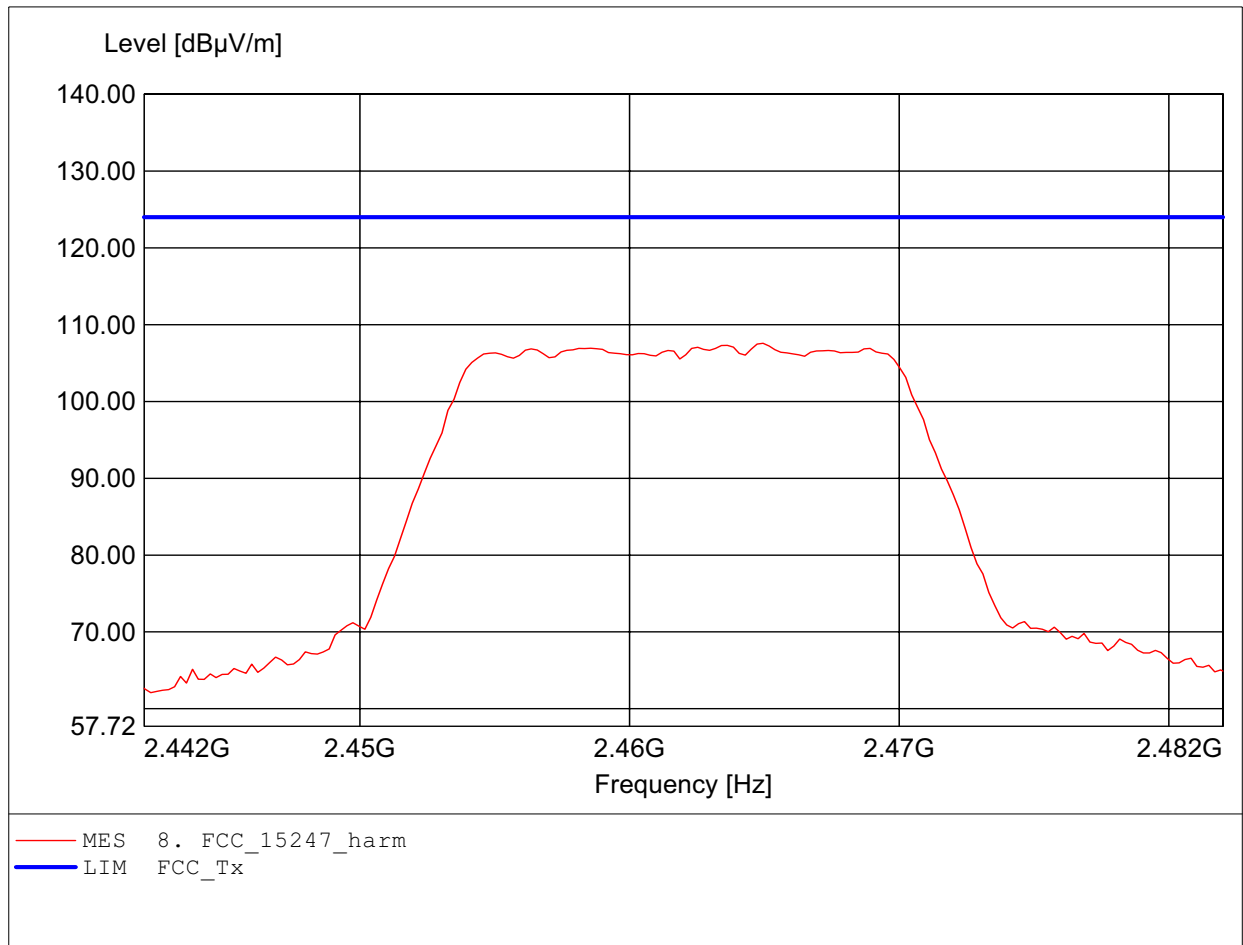

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HK 116
Freq: 181.944MHz, Emax: 30.77dBμV/m, RBW: 100kHz

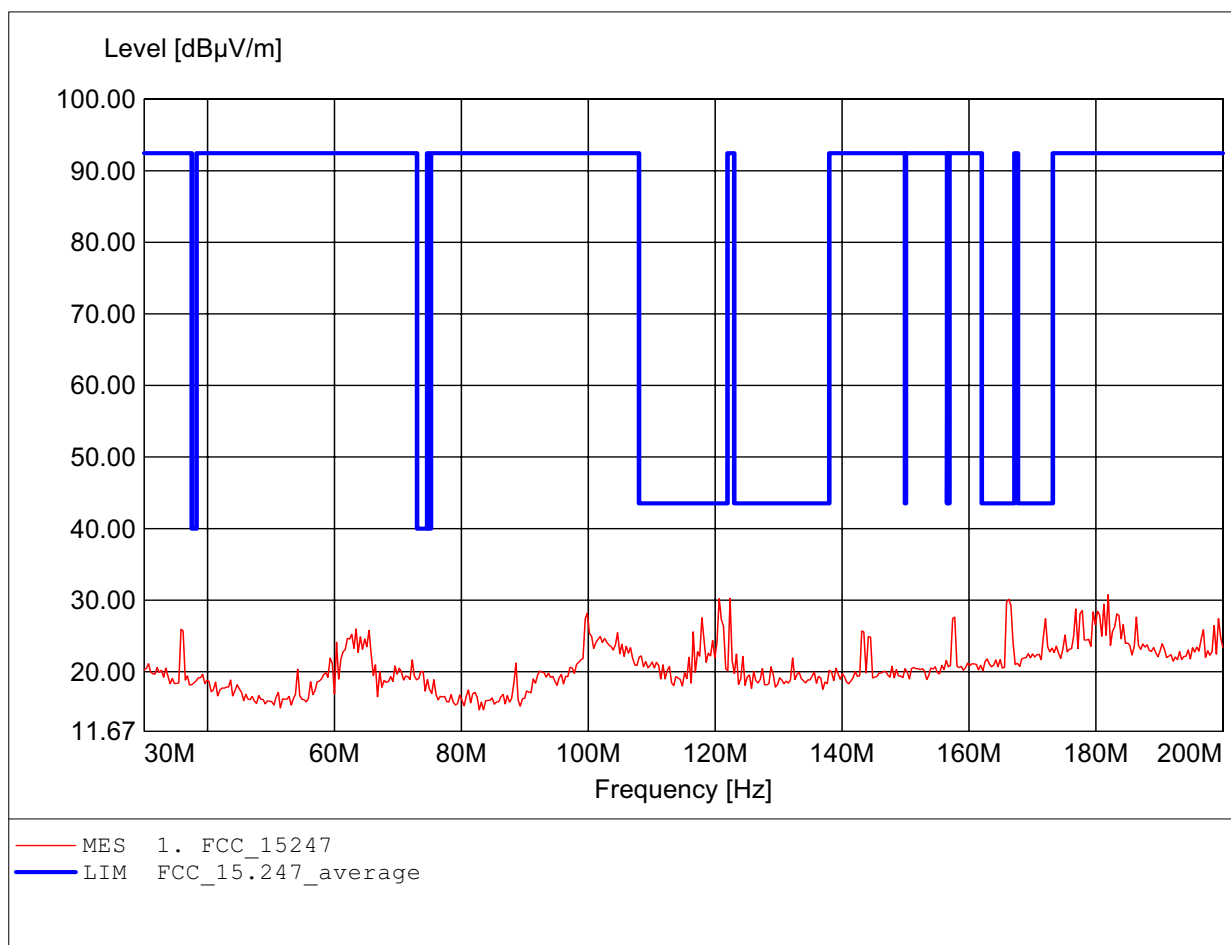

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HK 116
Freq: 35.792MHz, Emax: 33.59dBμV/m, RBW: 100kHz

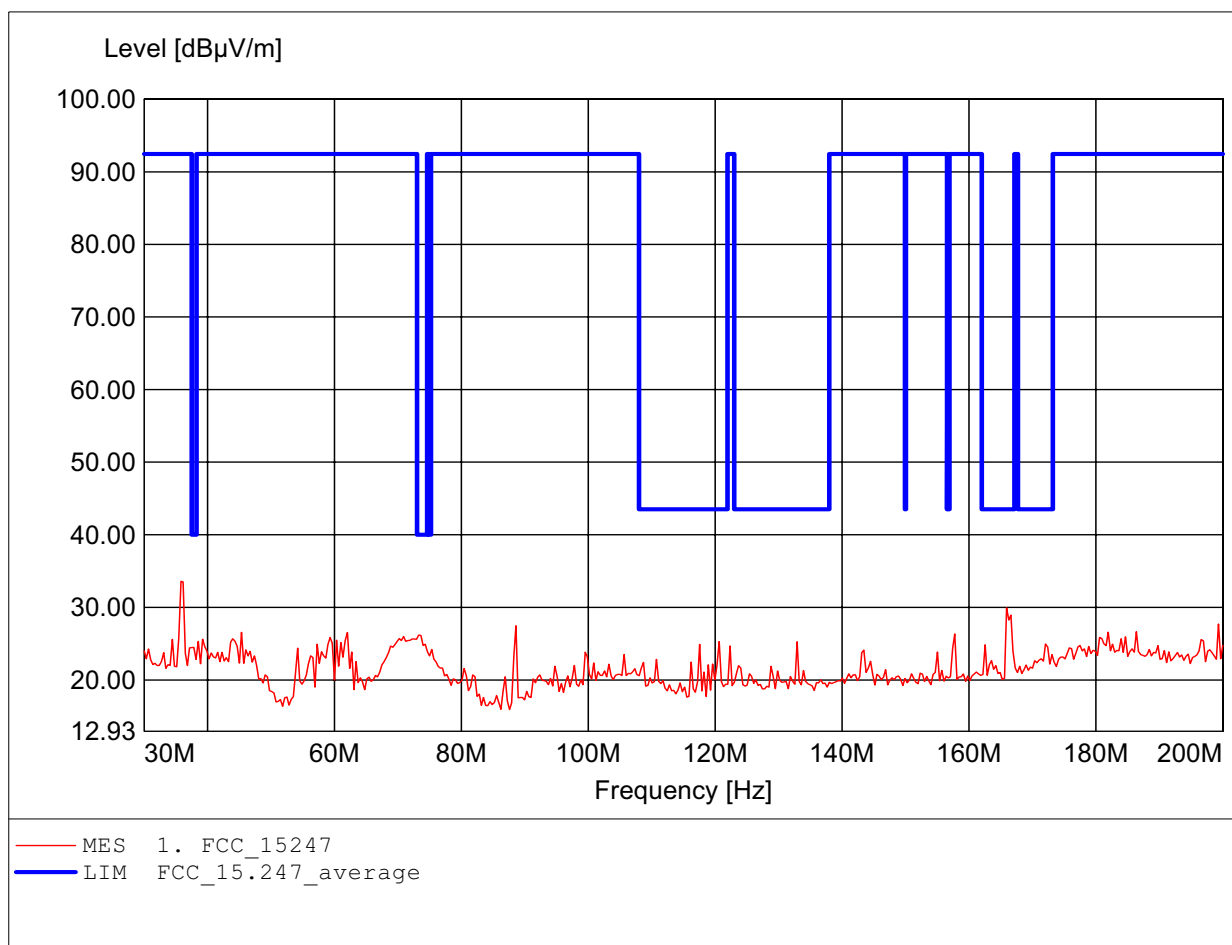

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL 223,
Freq: 802.806MHz, Emax: 54.63dBμV/m, RBW: 100kHz

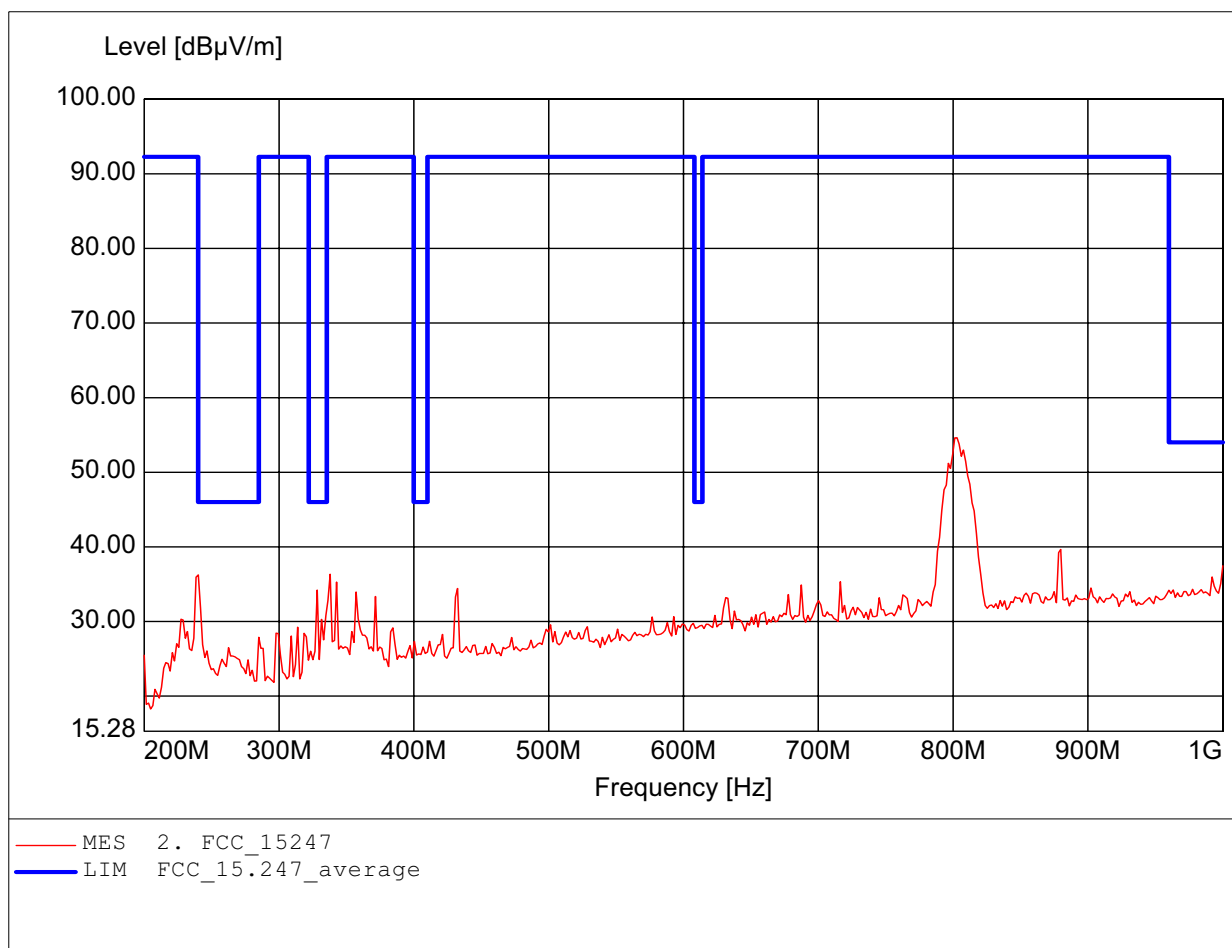

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL 223,
Freq: 804.409MHz, Emax: 48.53dBμV/m, RBW: 100kHz

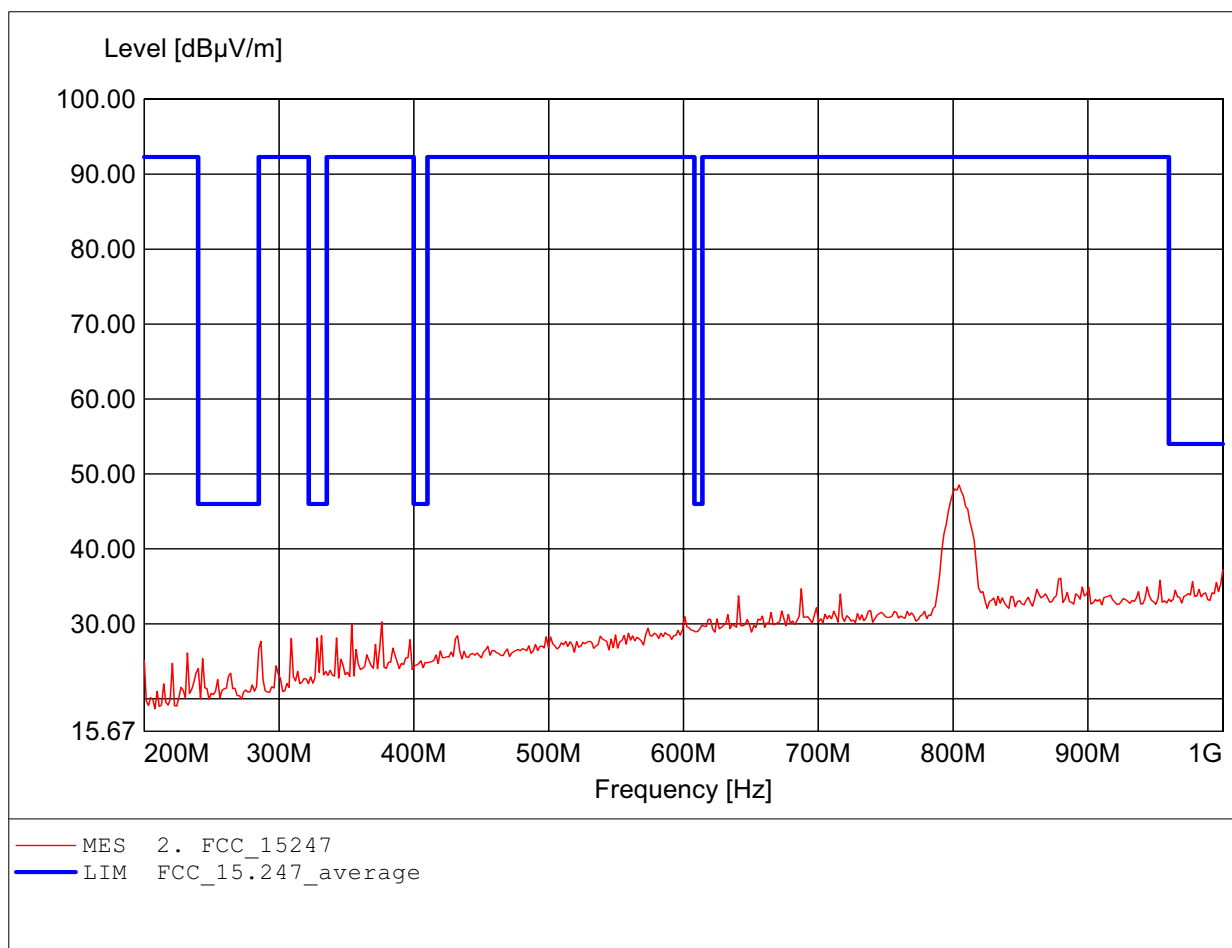

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, amplif.
Freq: 3.216GHz, Emax: 51.02dBμV/m, RBW: 1MHz

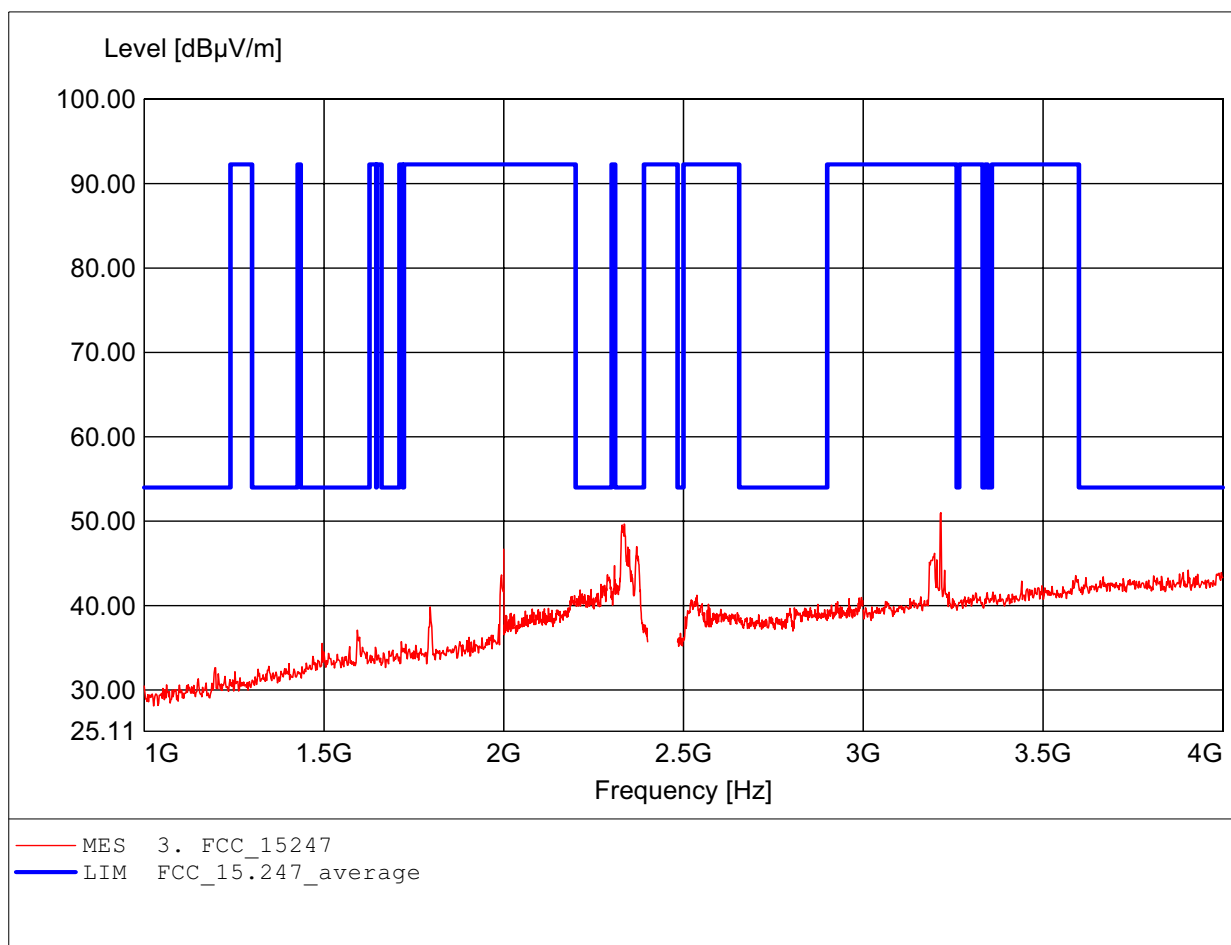

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Test Specification: according to §15.247 / LP 0002, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 2.331GHz, Emax: 52.72dBμV/m, RBW: 1MHz

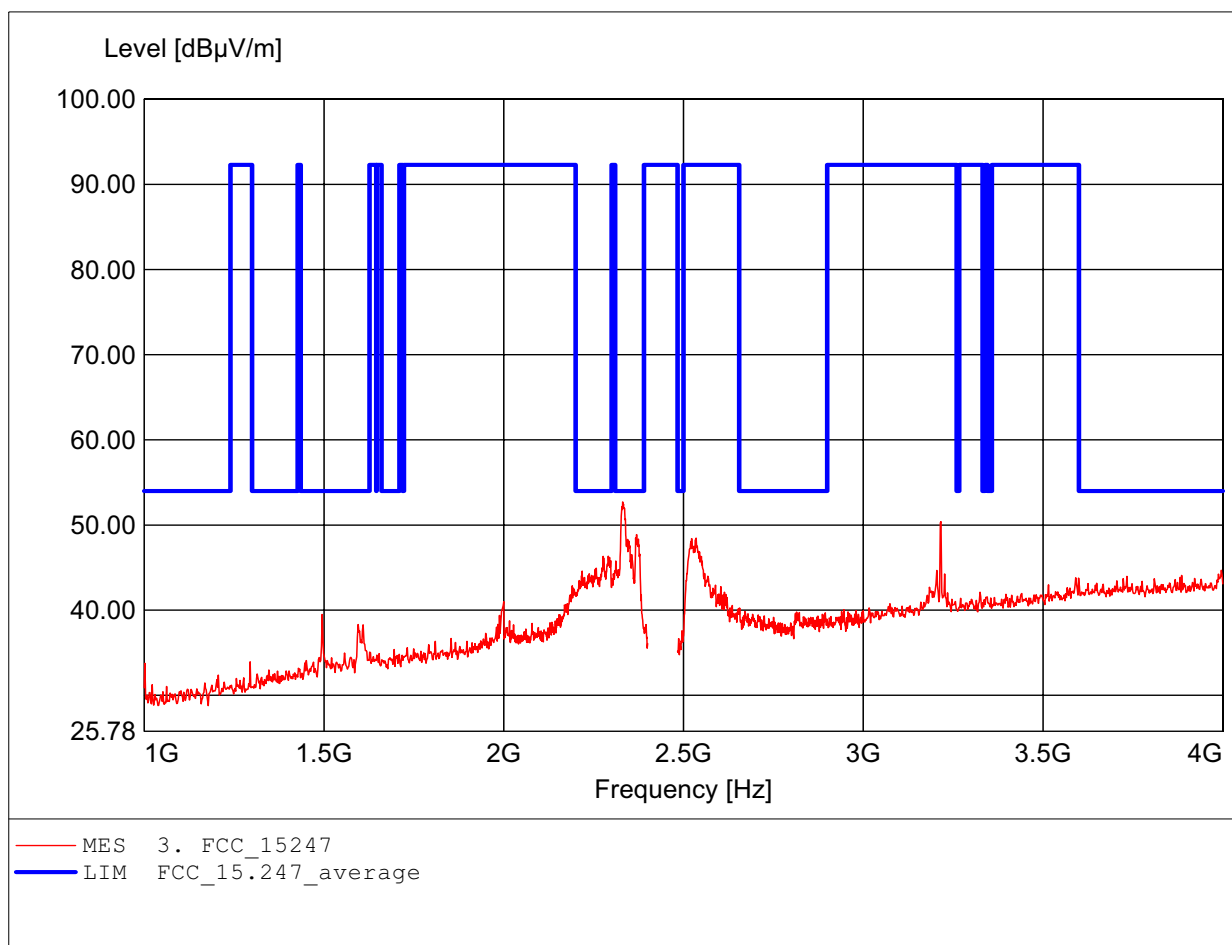

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 7.743GHz, Emax: 52.45dBµV/m, RBW: 1MHz

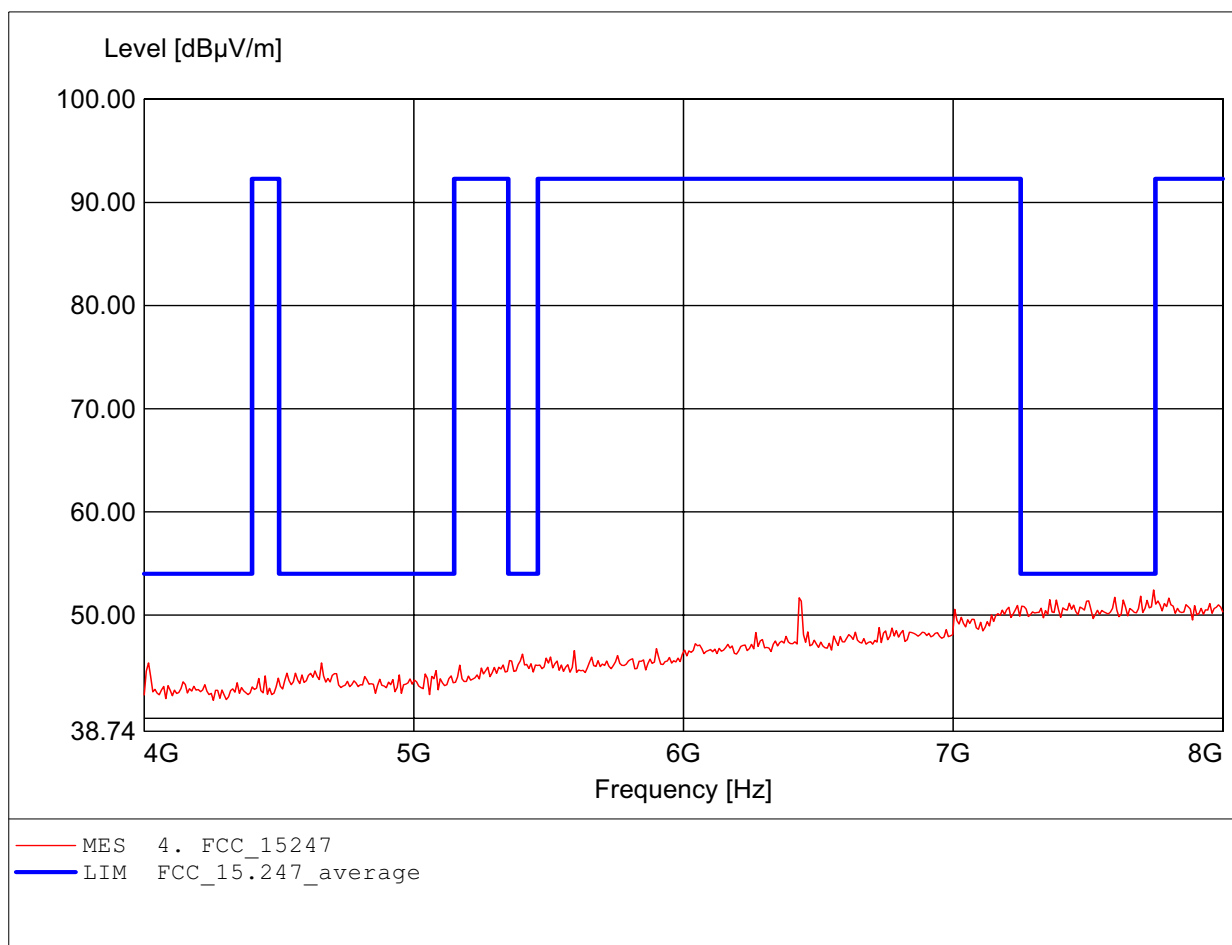

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 7.968GHz, Emax: 51.78dBμV/m, RBW: 1MHz

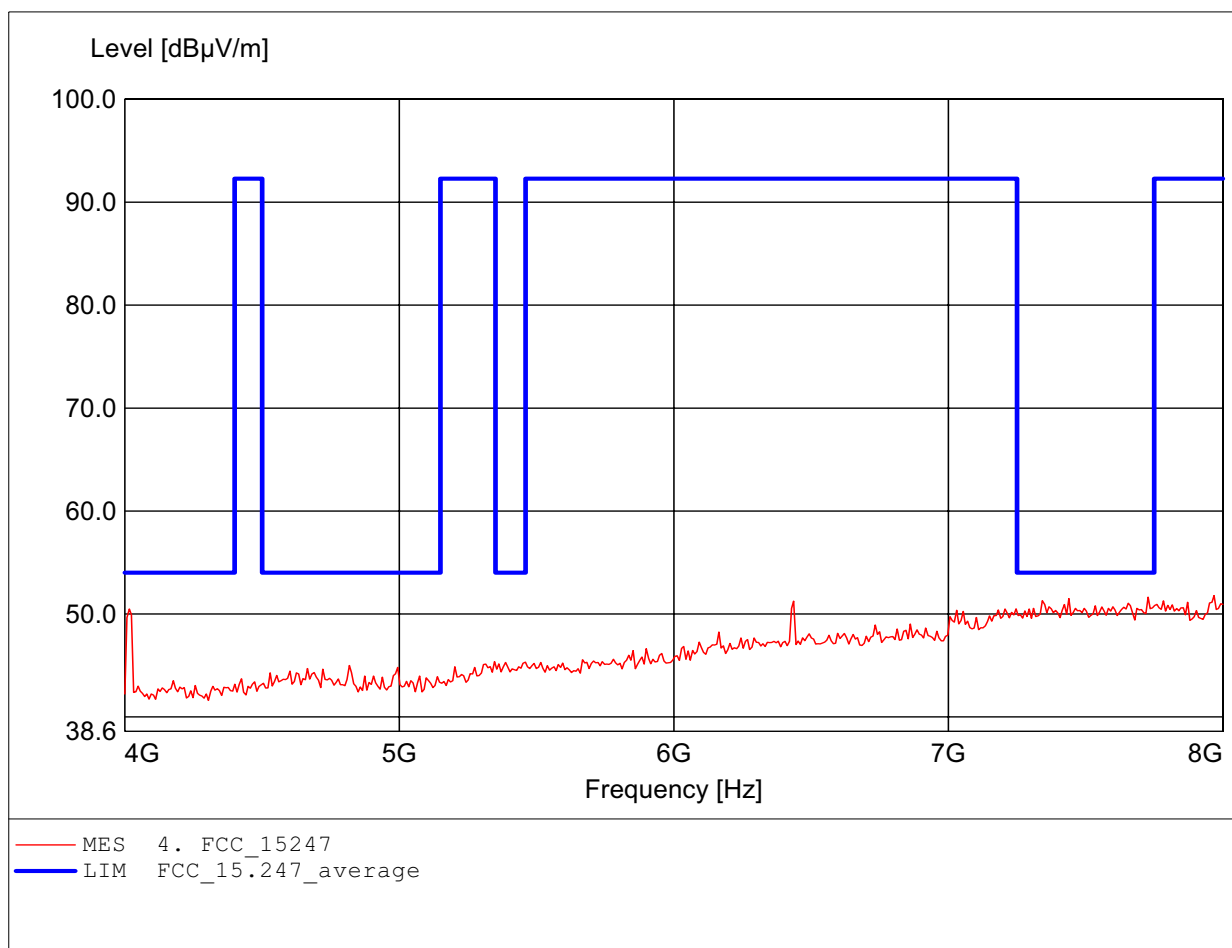

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, ampl.+HP.
Freq: 12.000GHz, Emax: 48.22dBμV/m, RBW: 1MHz

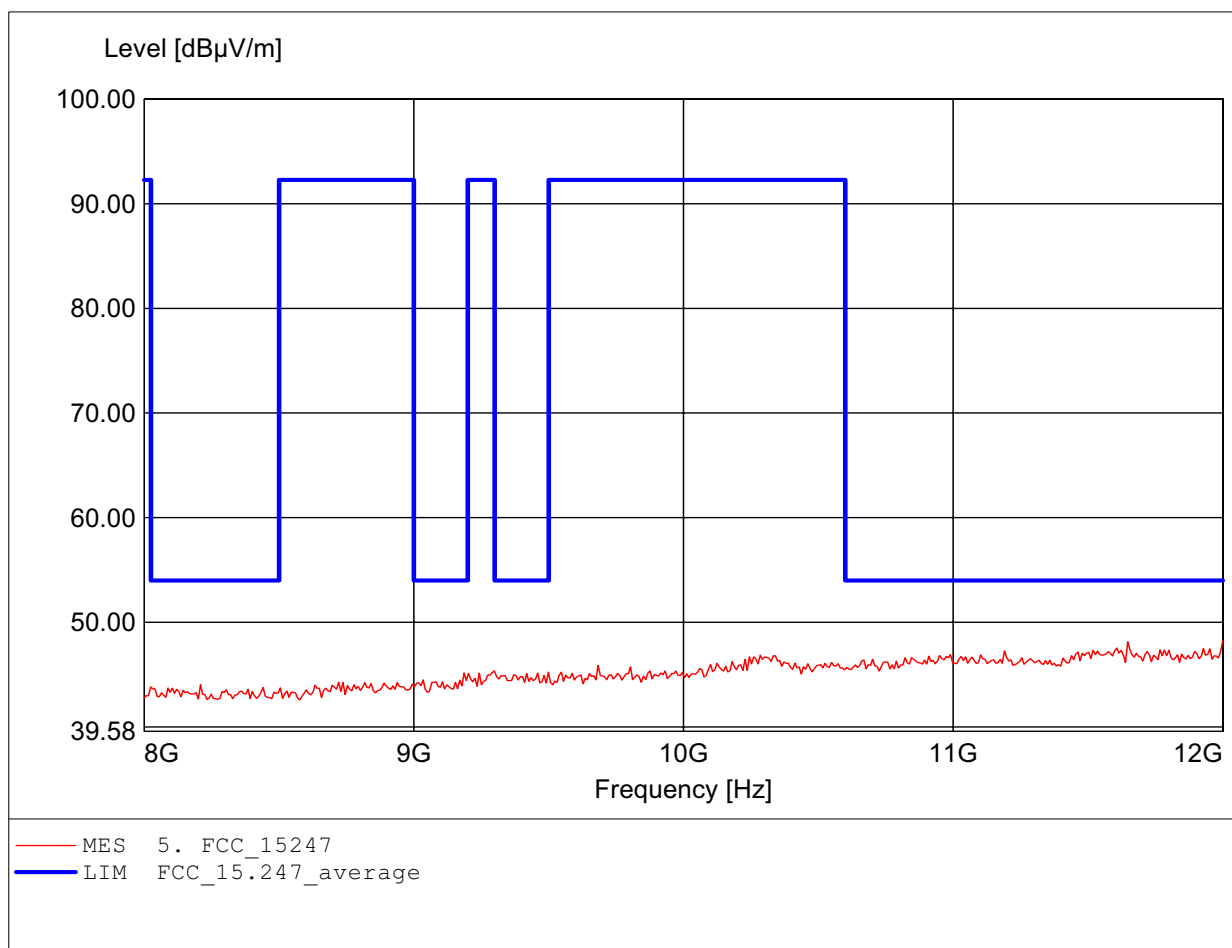

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, ampl.+HP.
Freq: 11.944GHz, Emax: 47.90dBμV/m, RBW: 1MHz

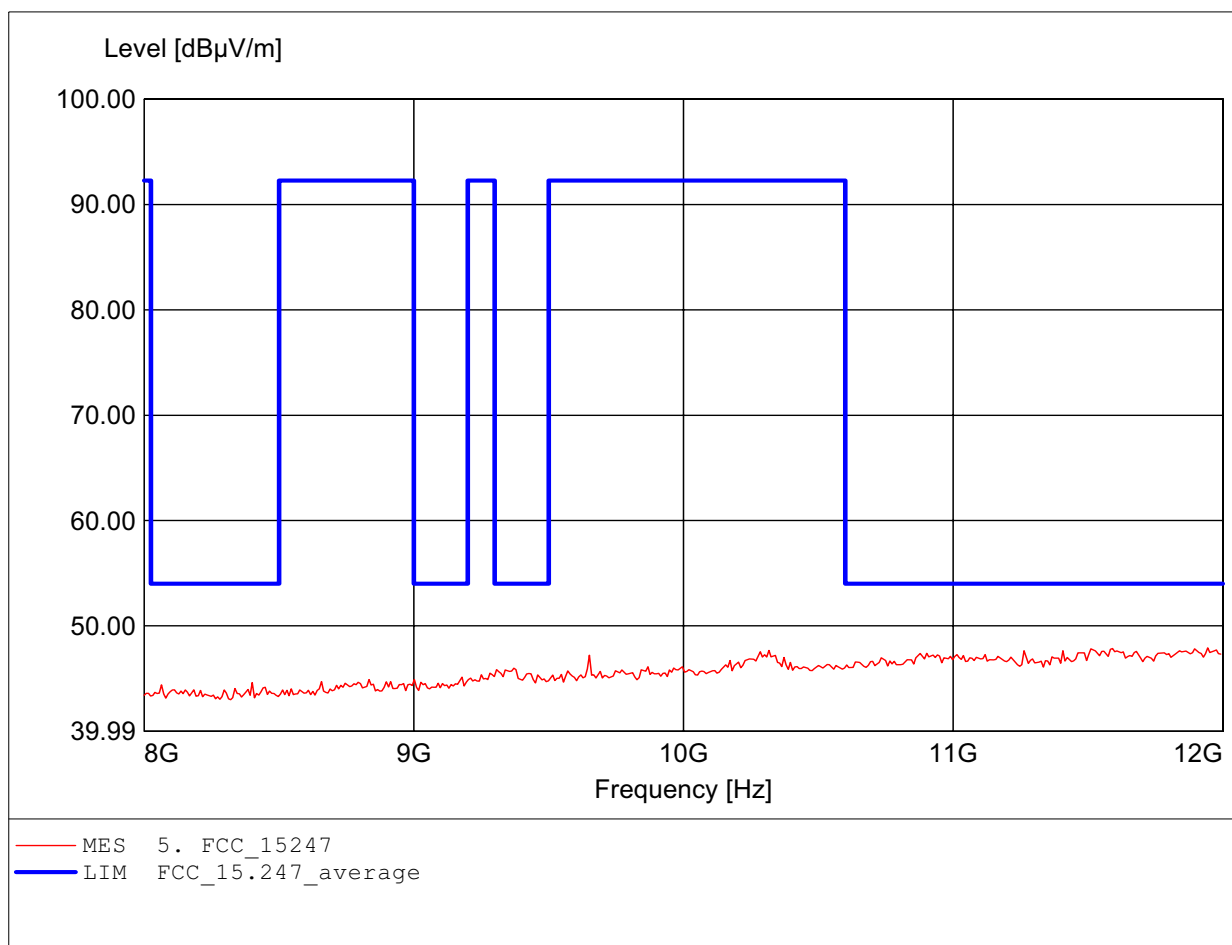

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, ampl.+HP.
Freq: 17.687GHz, Emax: 51.88dBμV/m, RBW: 1MHz

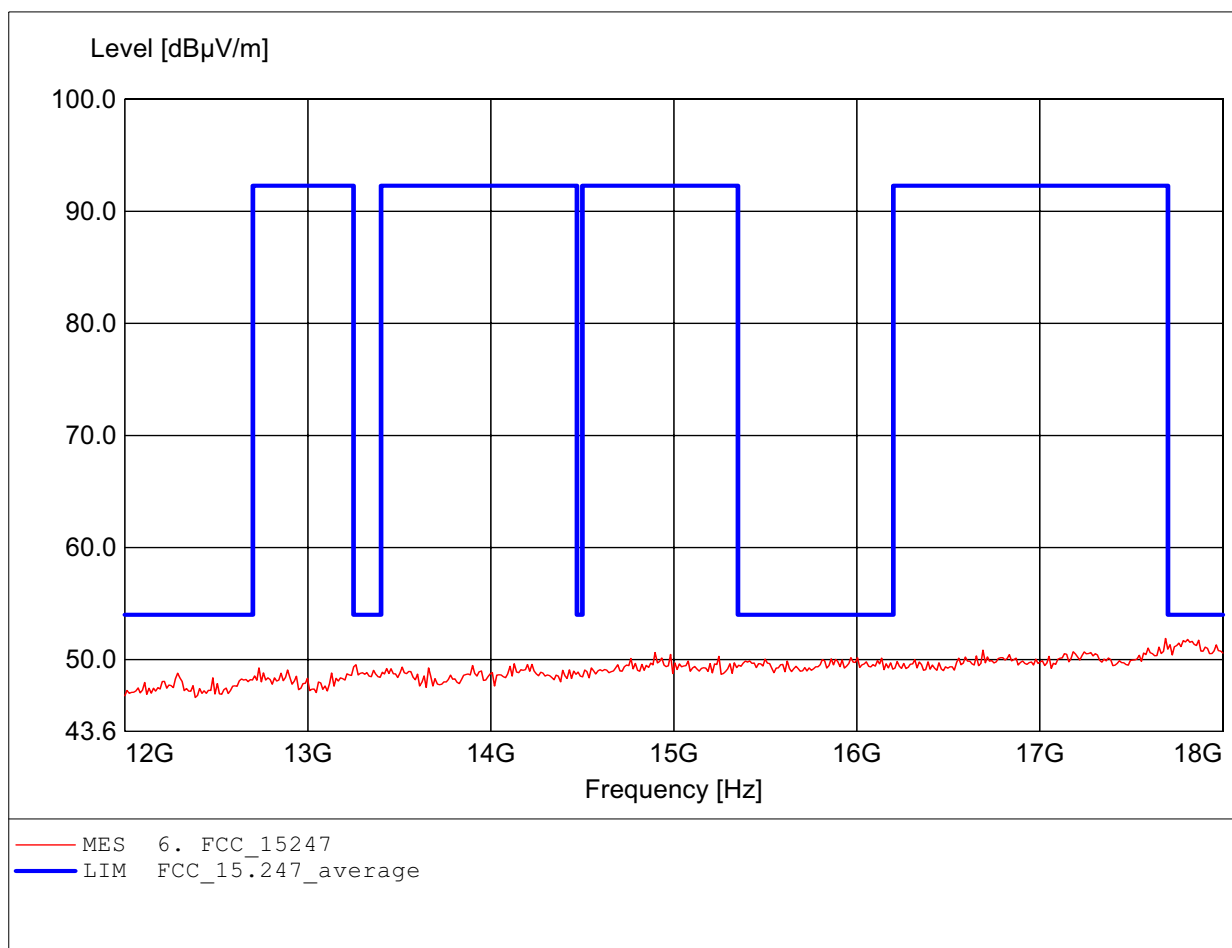

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, ampl.+HP.
Freq: 17.796GHz, Emax: 52.03dBμV/m, RBW: 1MHz

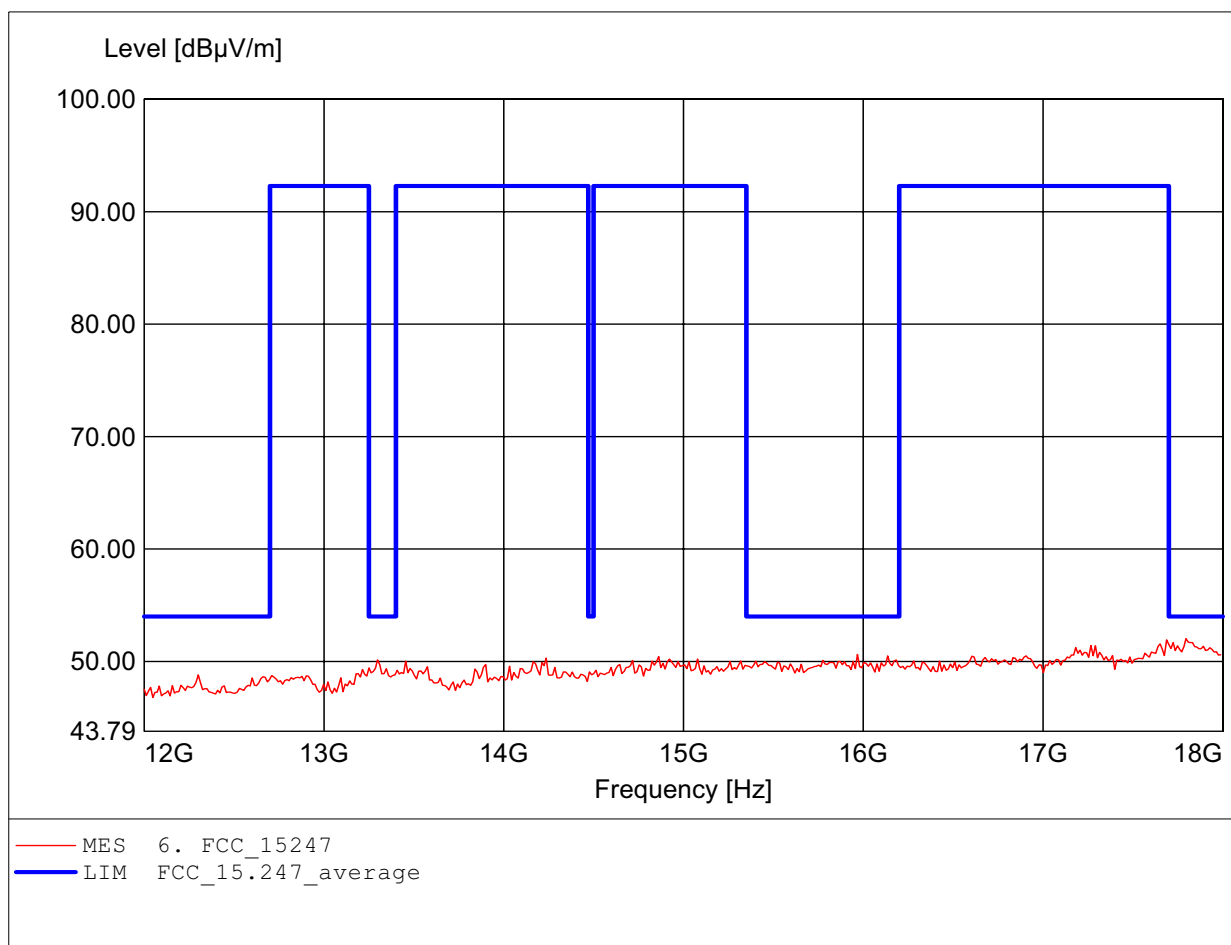

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, amplif.
Freq: 25.103GHz, Emax: 52.06dBμV/m, RBW: 1MHz

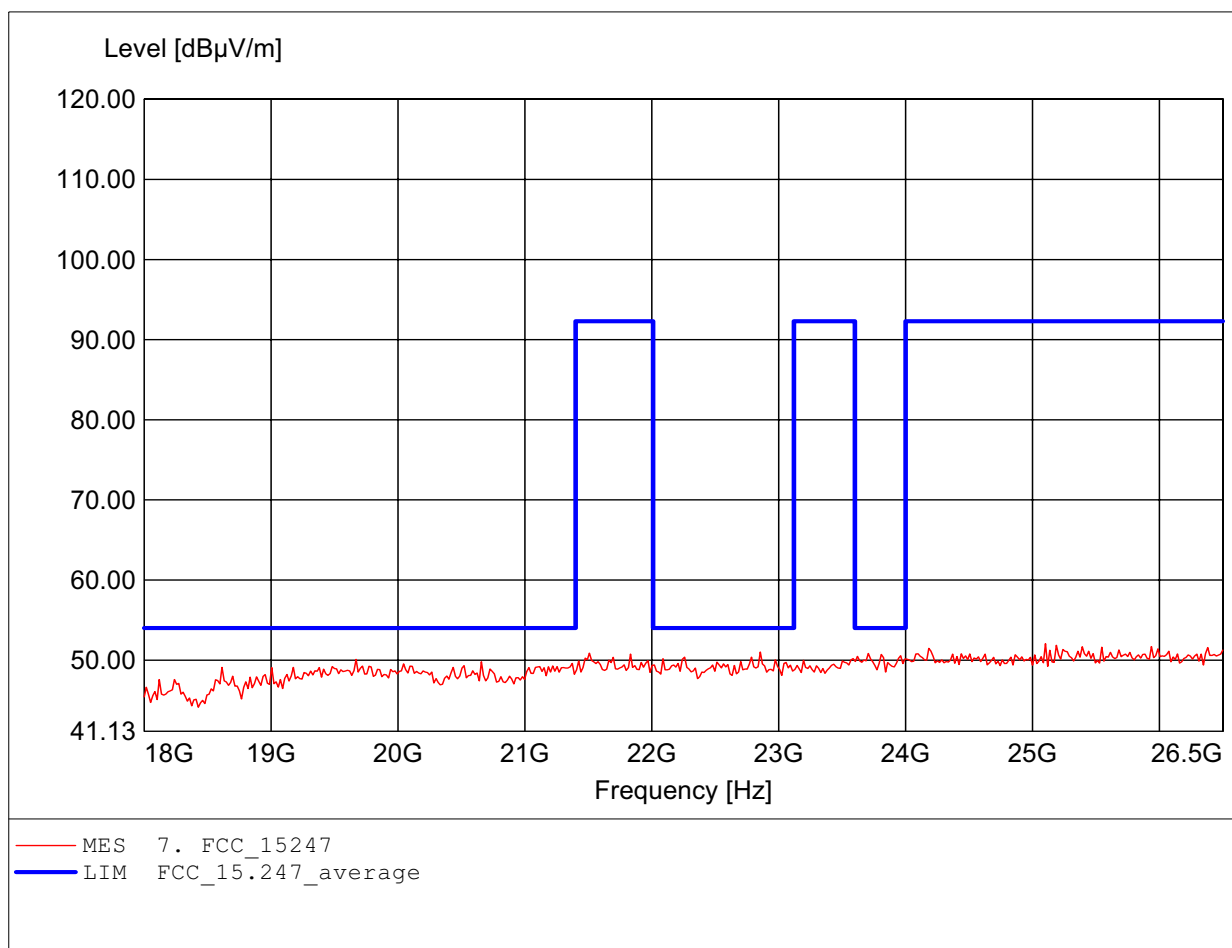

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, amplif.
Freq: 26.449GHz, Emax: 52.52dBμV/m, RBW: 1MHz

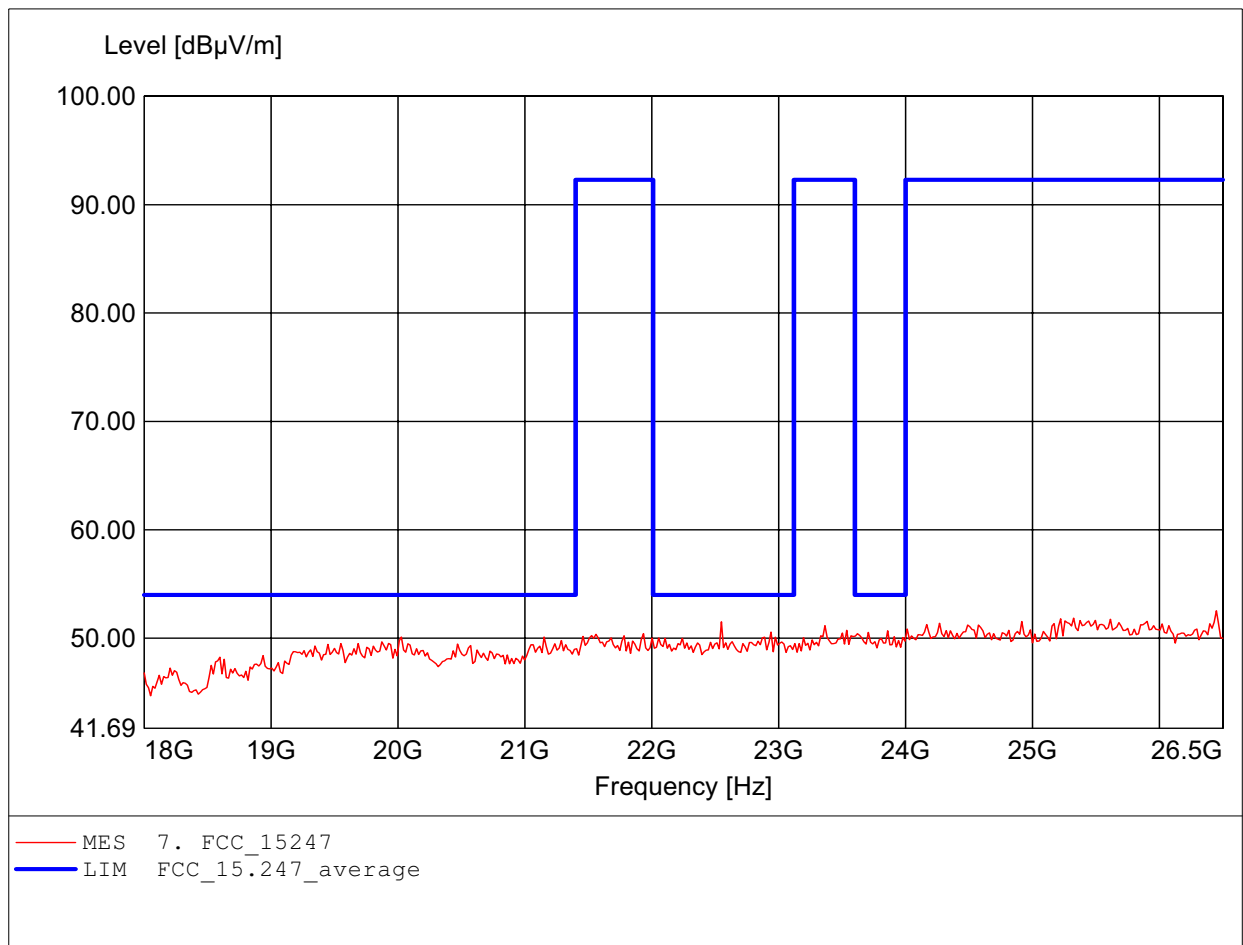

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HK 116
Freq: 180.581MHz, Emax: 31.94dBμV/m, RBW: 100kHz

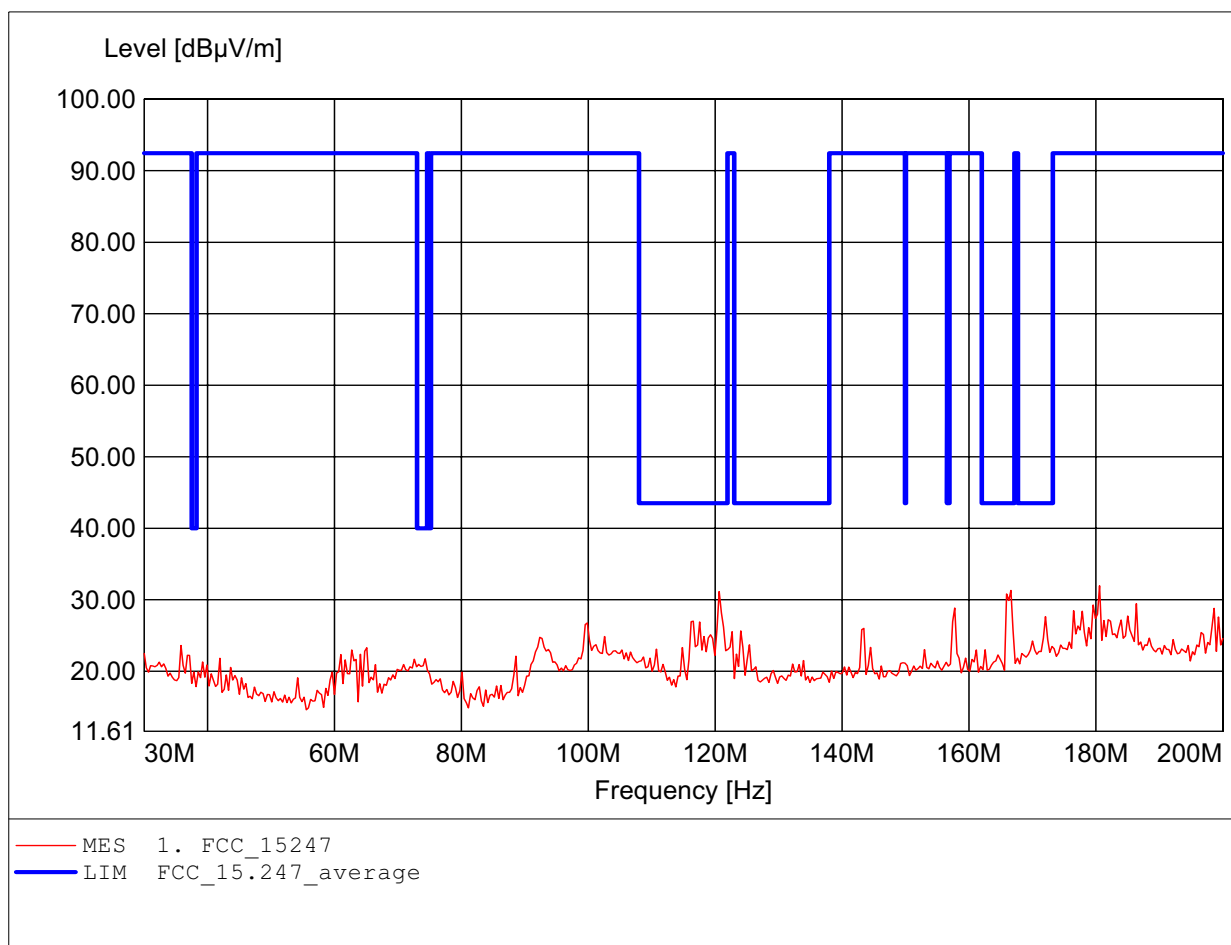

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HK 116
Freq: 36.132MHz, Emax: 33.74dBμV/m, RBW: 100kHz

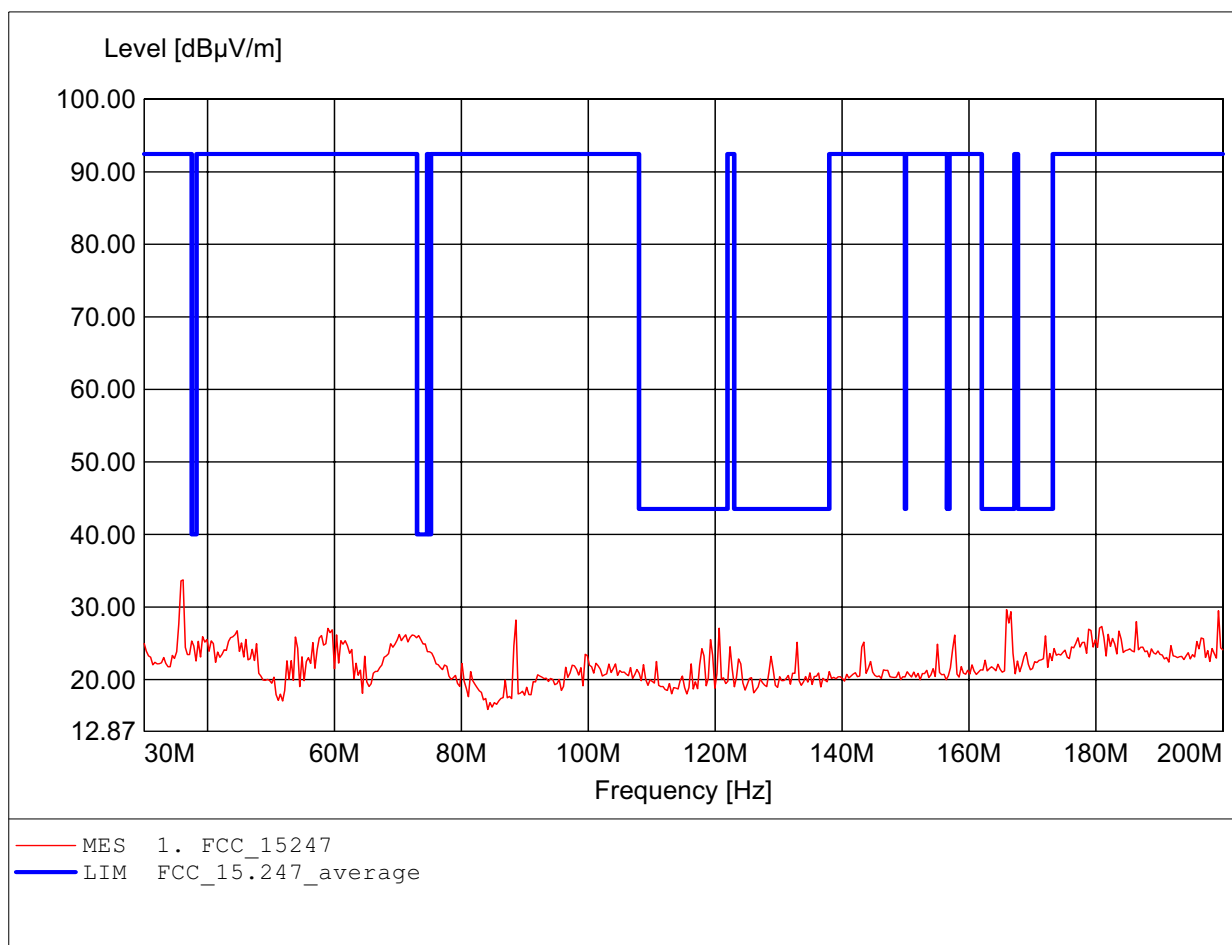

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL 223,
Freq: 812.425MHz, Emax: 53.29dBμV/m, RBW: 100kHz

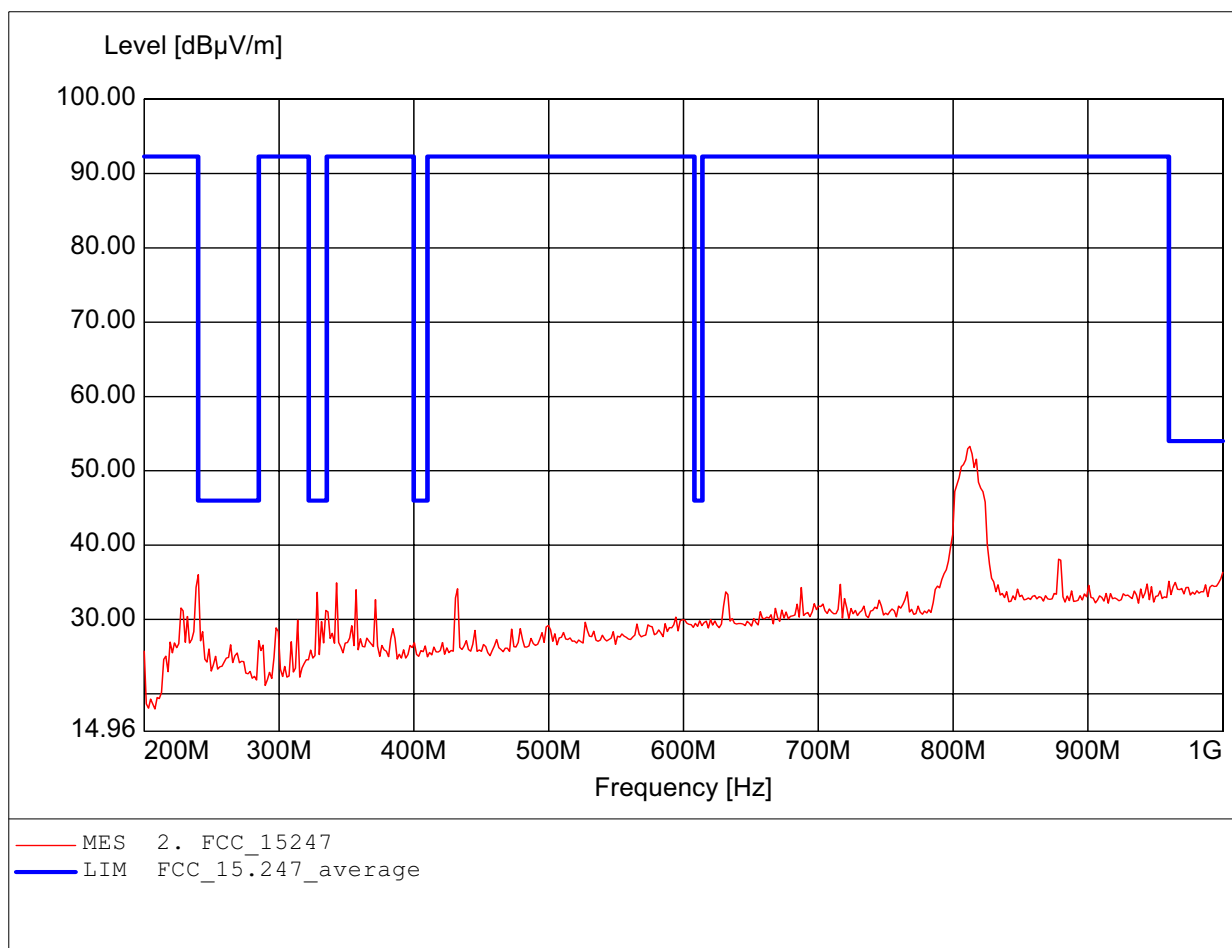

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL223
Freq: 809.218GHz, Emax: 47.43dBμV/m, RBW: 100kHz

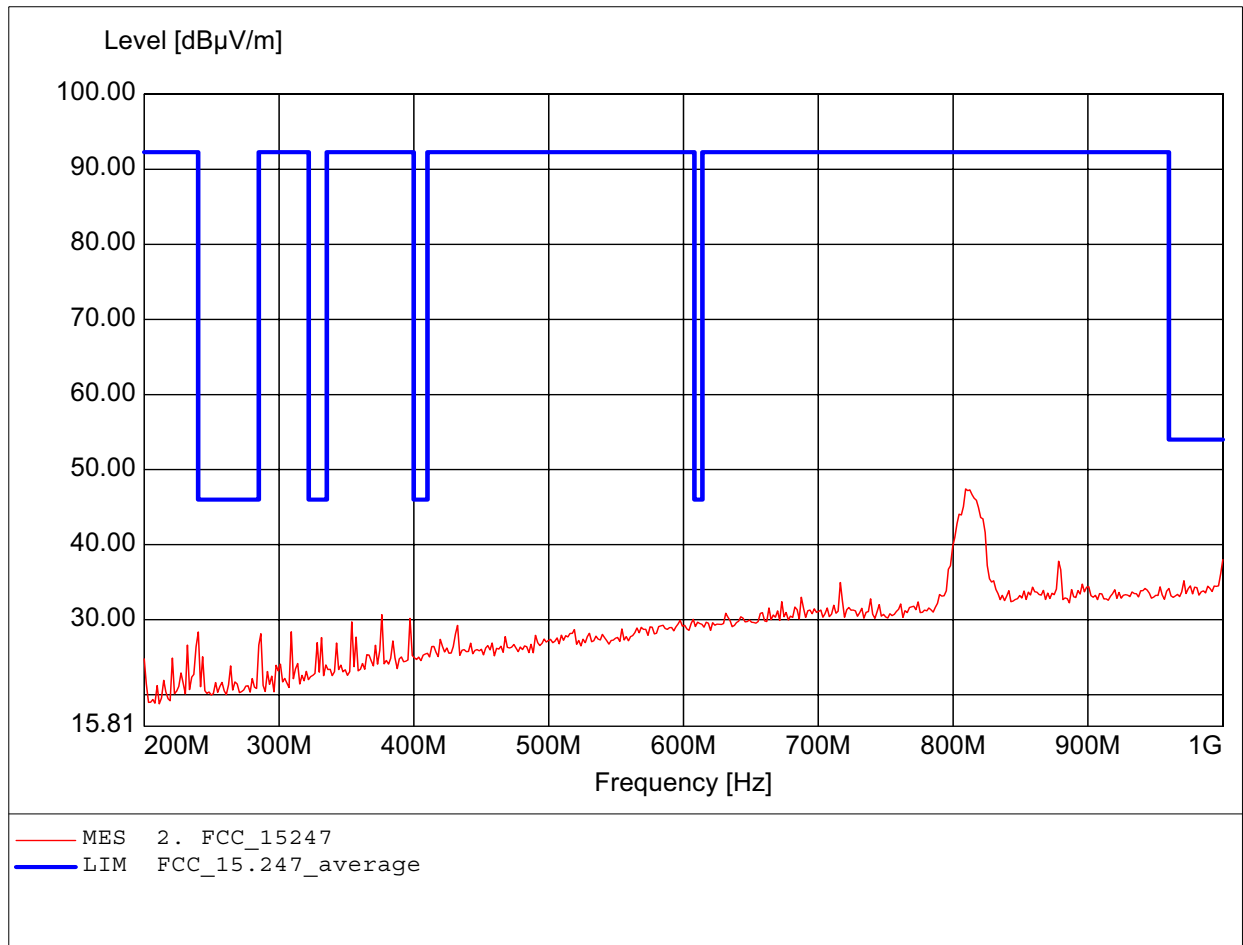

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, amplif.
Freq: 3.248GHz, Emax: 49.12dBμV/m, RBW: 1MHz

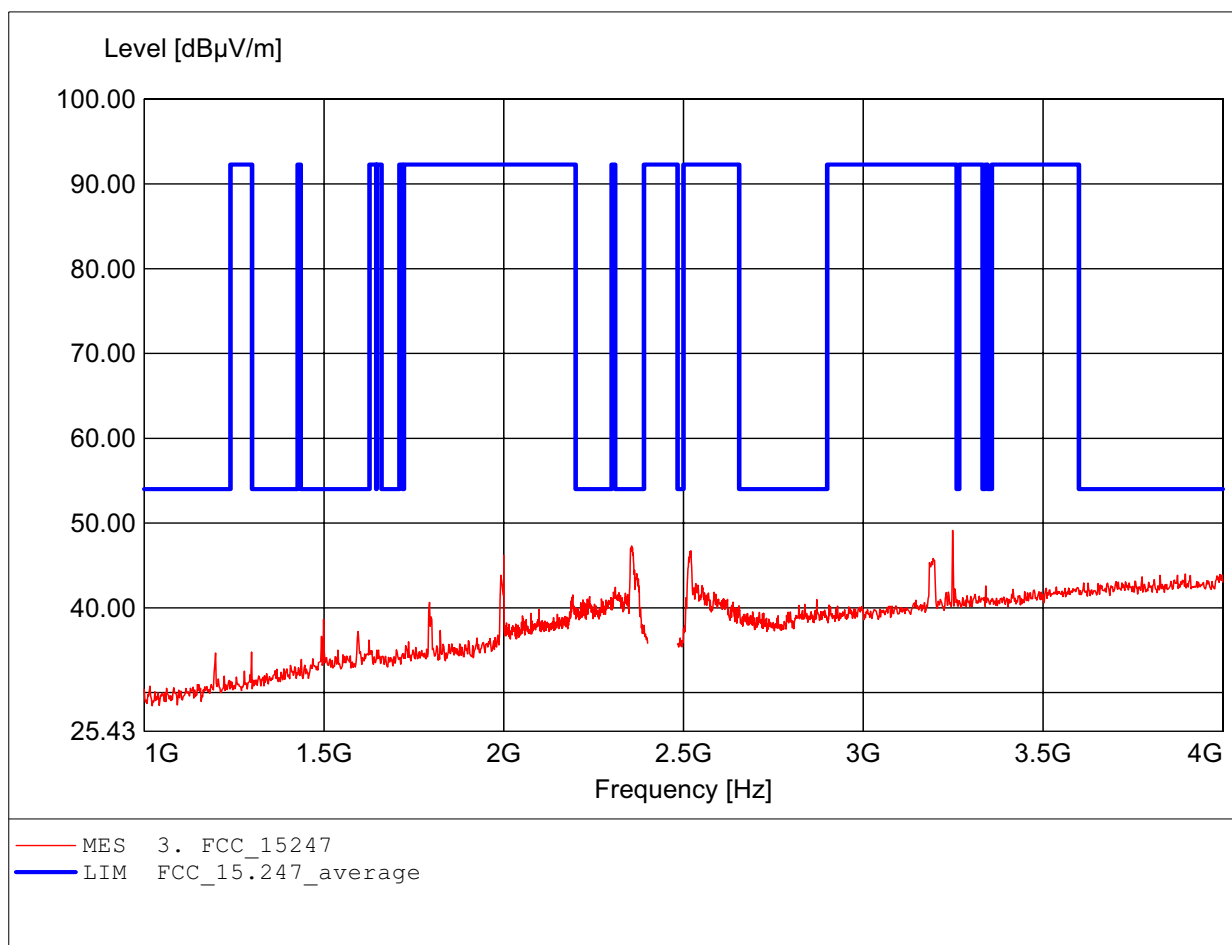

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, amplif.
Freq: 2.519GHz, Emax: 51.72dBμV/m, RBW: 1MHz

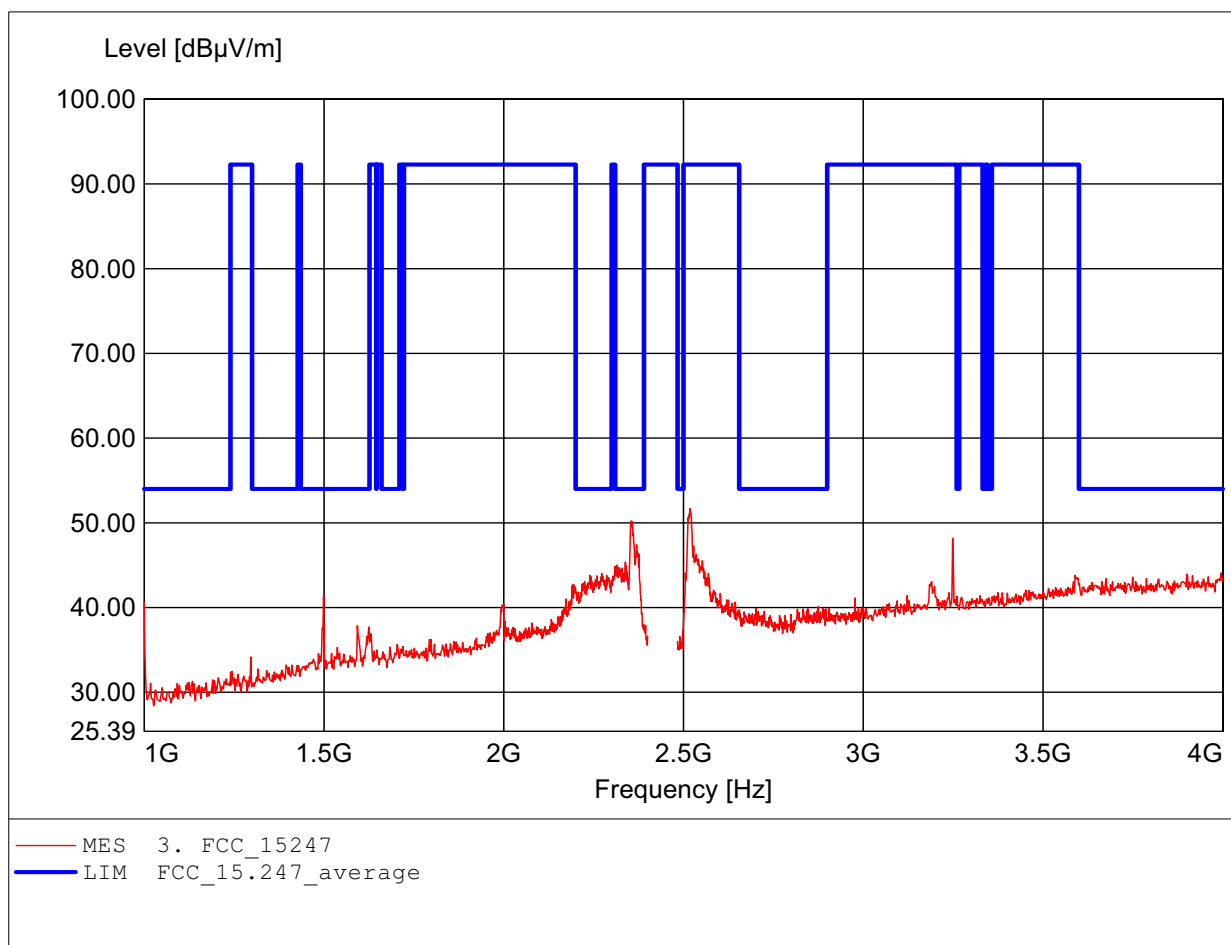

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, ampl.+HP.
Freq: 7.792GHz, Emax: 51.87dBμV/m, RBW: 1MHz

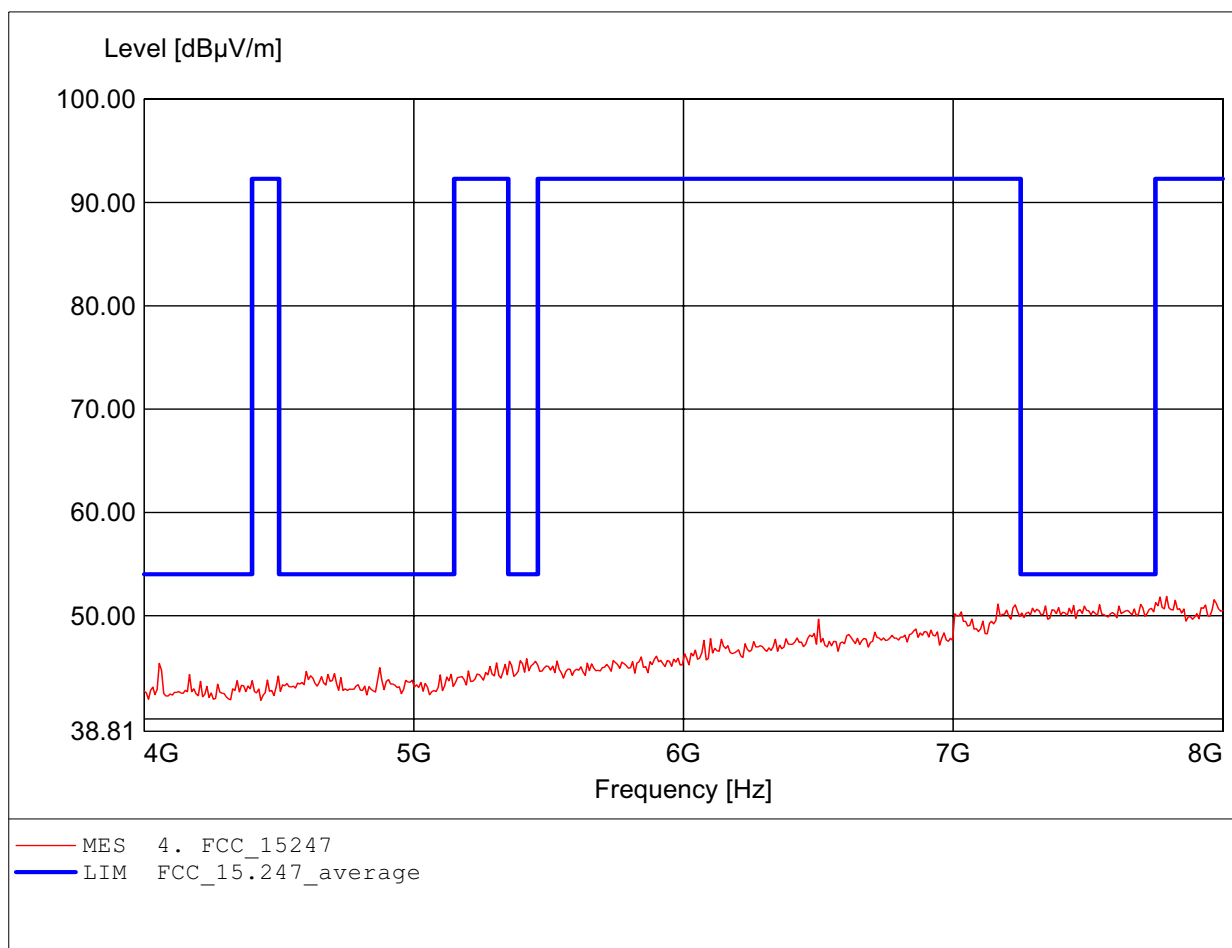

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, ampl.+HP.
Freq: 7.527GHz, Emax: 51.62dBμV/m, RBW: 1MHz

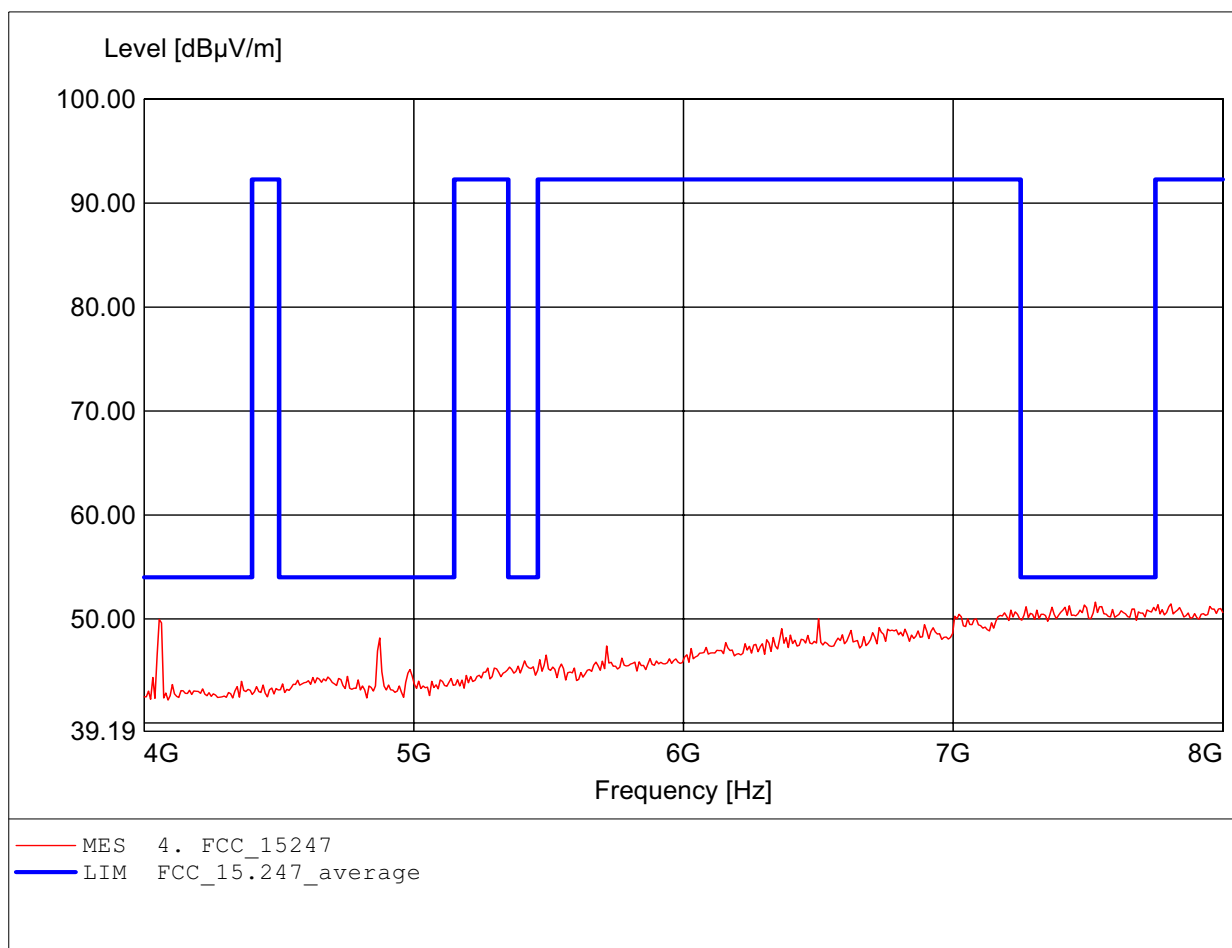

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, ampl.+HP.
Freq: 9.747GHz, Emax: 48.44dBμV/m, RBW: 1MHz

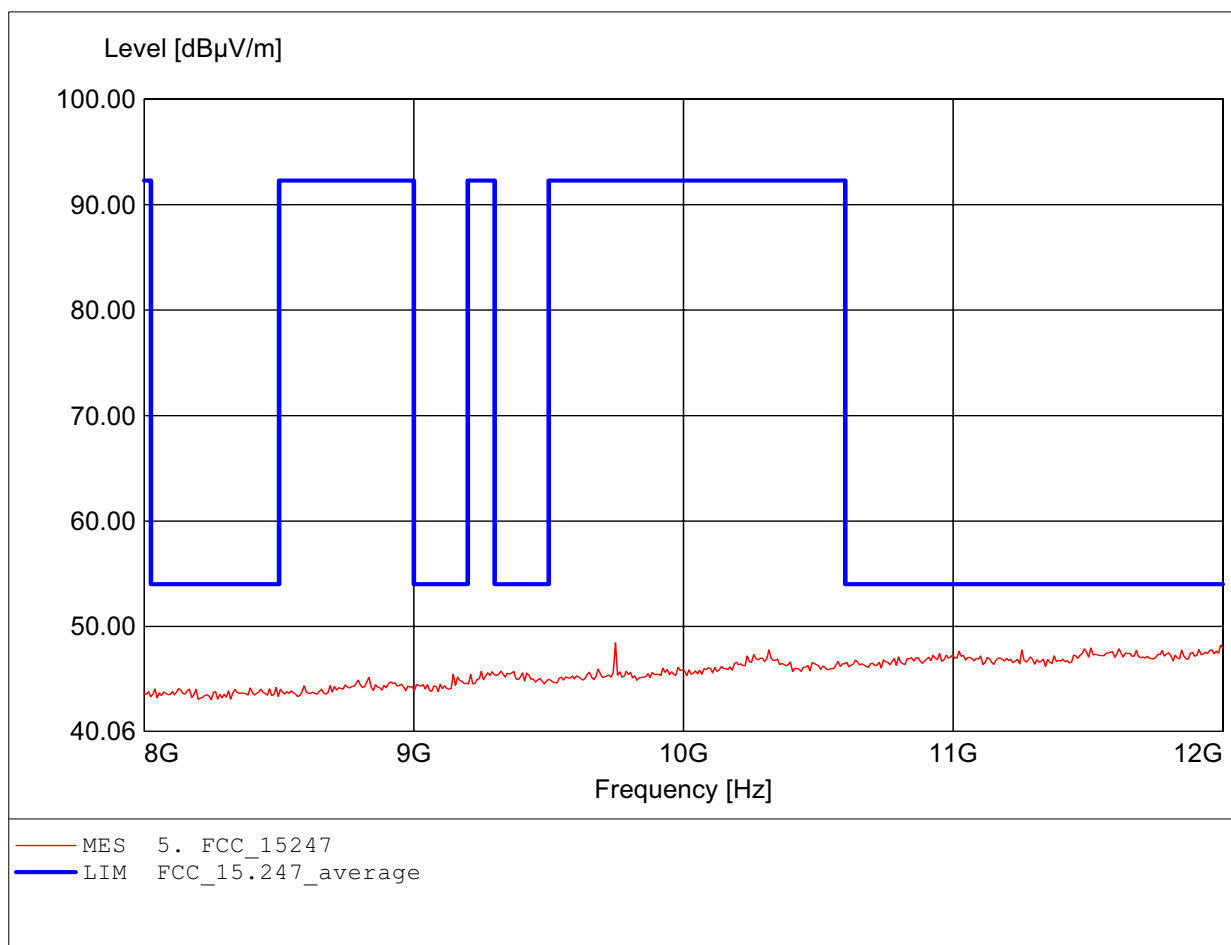

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, ampl.+HP.
Freq: 11.679GHz, Emax: 47.63dBμV/m, RBW: 1MHz

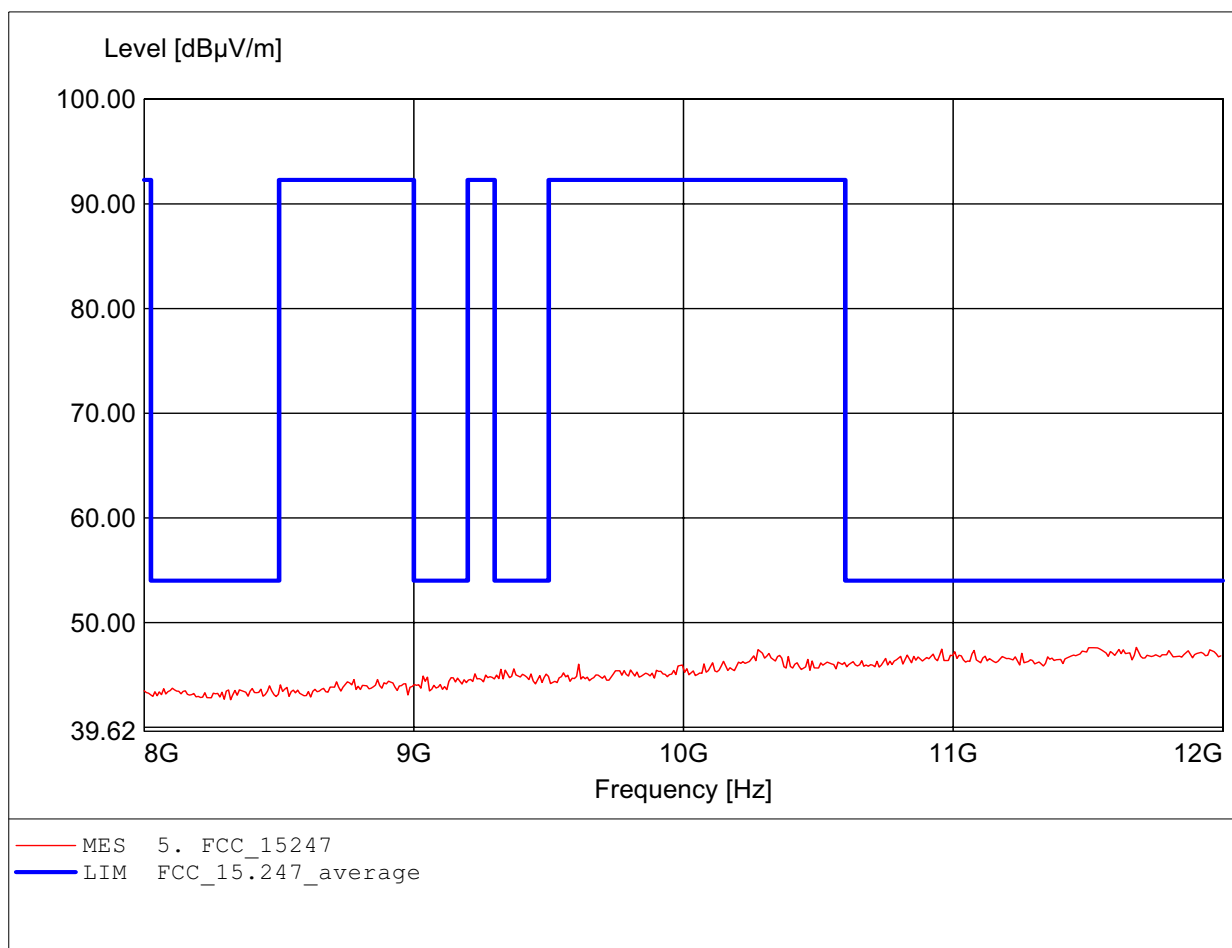

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, ampl.+HP.
Freq: 17.784GHz, Emax: 52.33dBμV/m, RBW: 1MHz

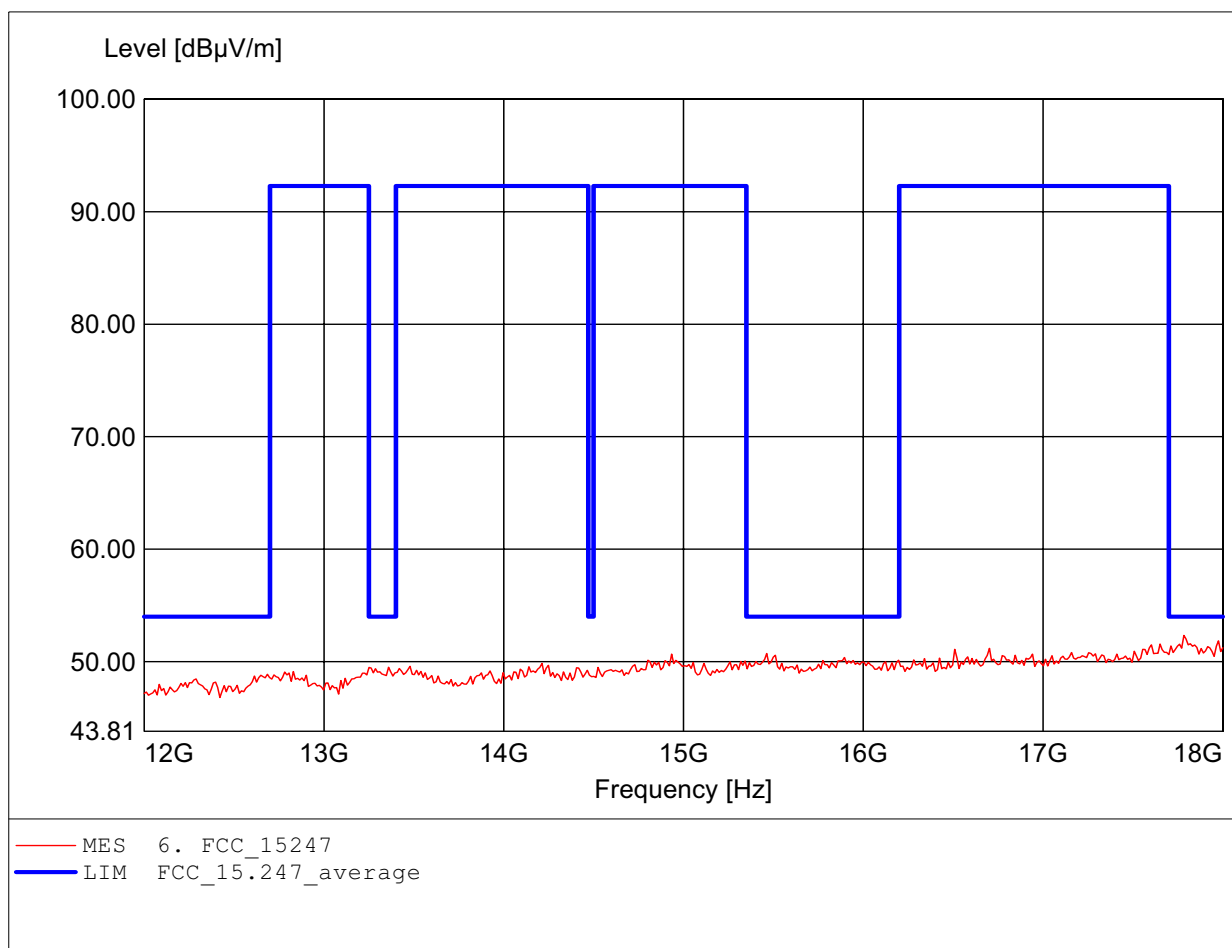

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, ampl.+HP.
Freq: 17.928GHz, Emax: 52.39dBμV/m, RBW: 1MHz

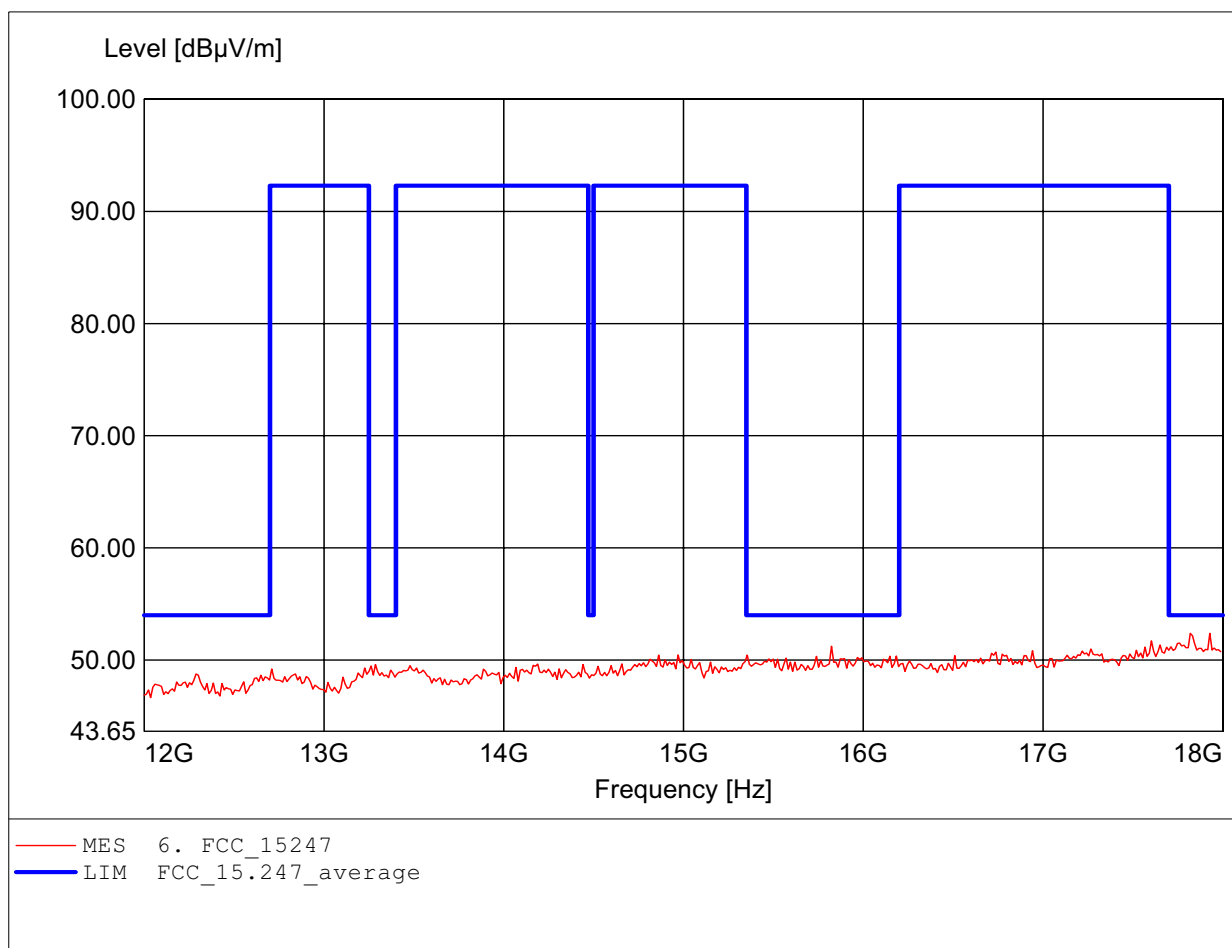

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, amplif.
Freq: 26.108GHz, Emax: 51.70dBμV/m, RBW: 1MHz

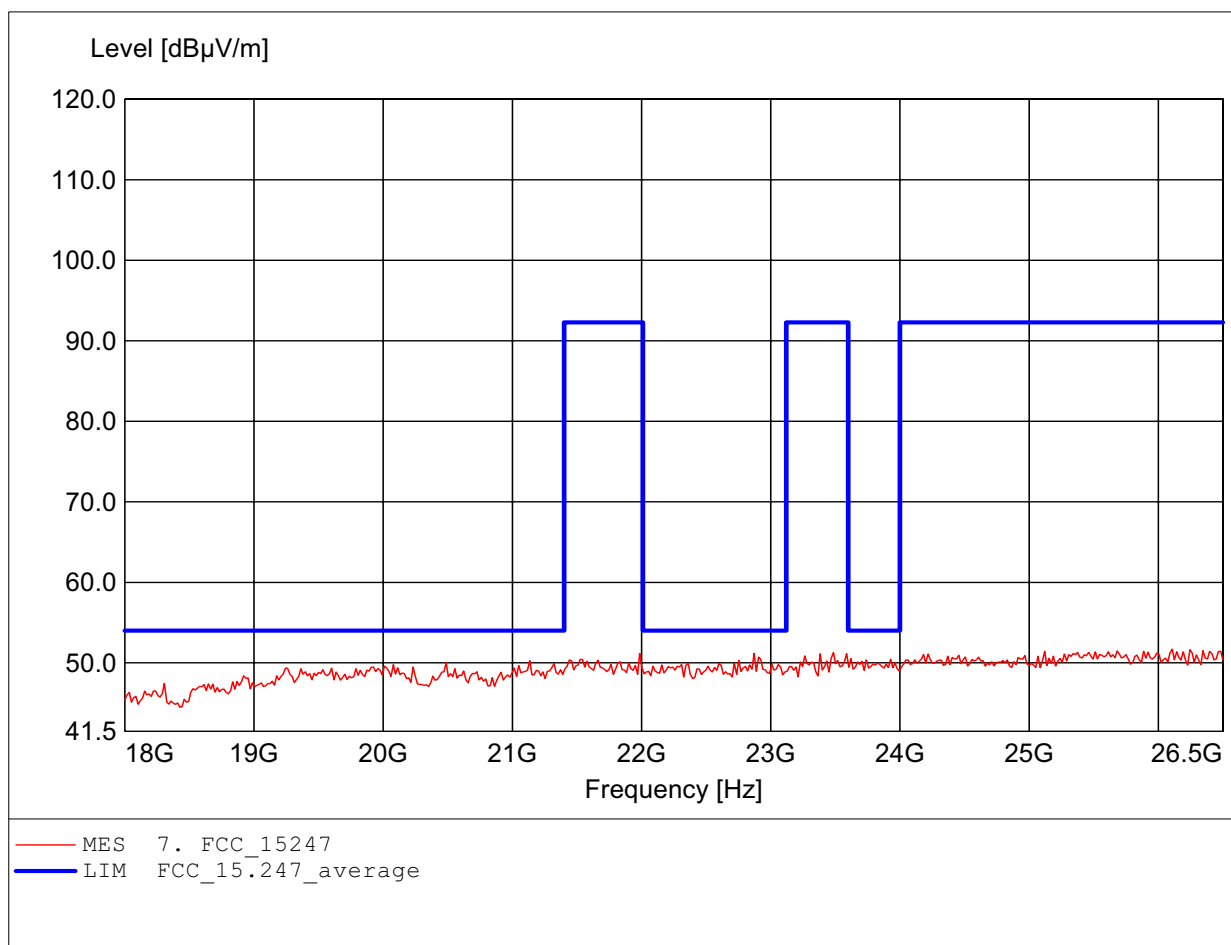

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, amplif.
Freq: 25.972GHz, Emax: 52.12dBμV/m, RBW: 1MHz

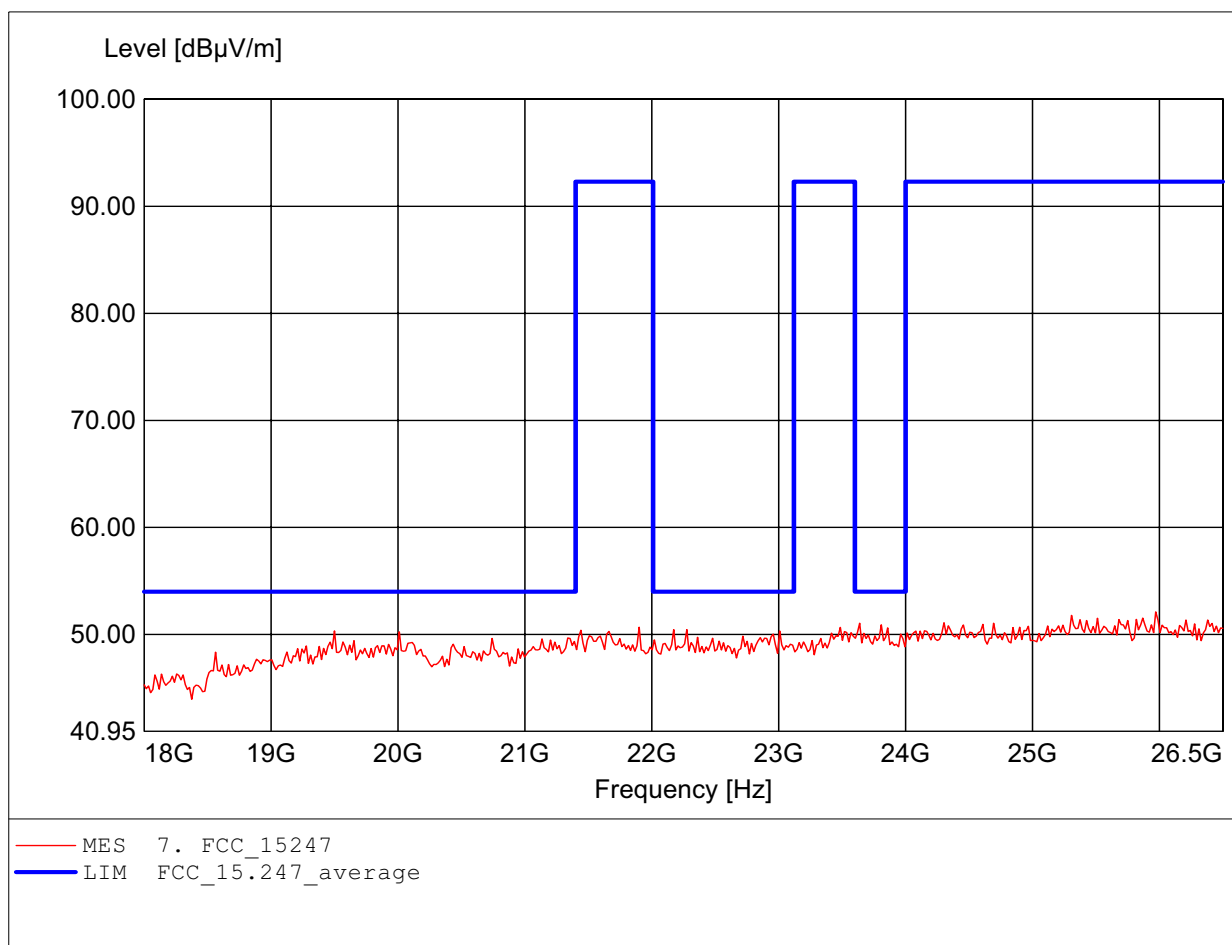

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HK 116
Freq: 122.325MHz, Emax: 31.34dBμV/m, RBW: 100kHz

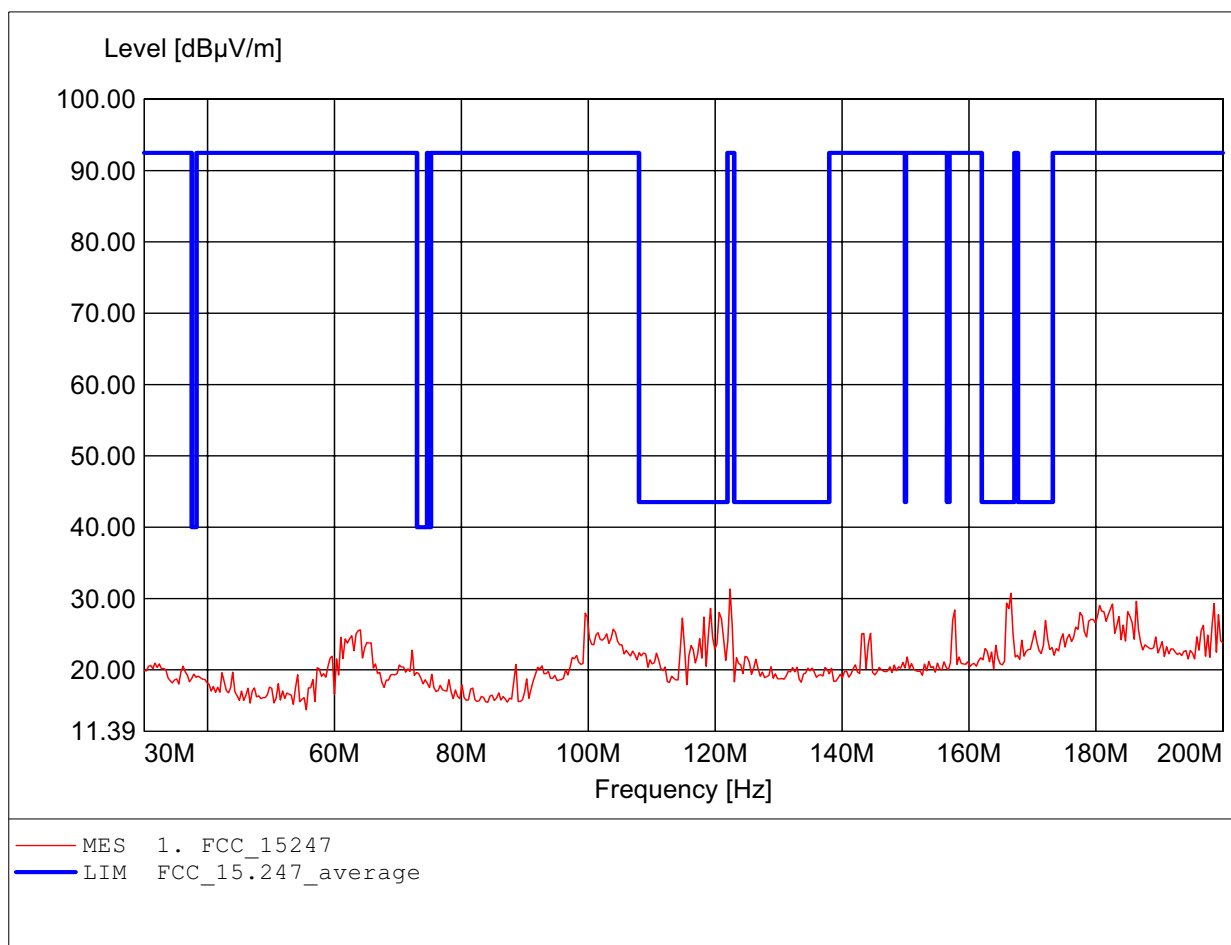

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HK 116
Freq: 36.132MHz, Emax: 32.47dBμV/m, RBW: 100kHz

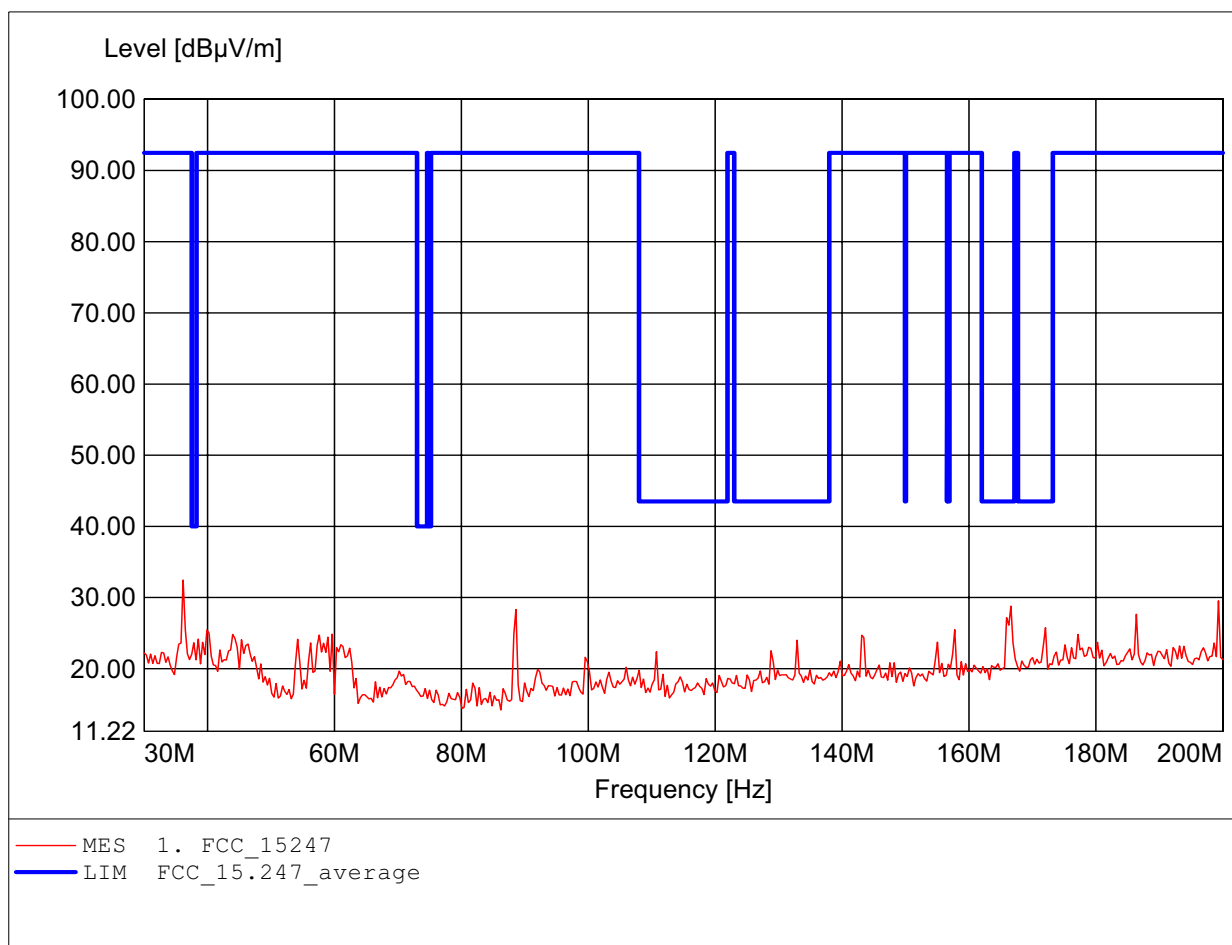

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223,
Freq: 818.838MHz, Emax: 49.69dBµV/m, RBW: 100kHz

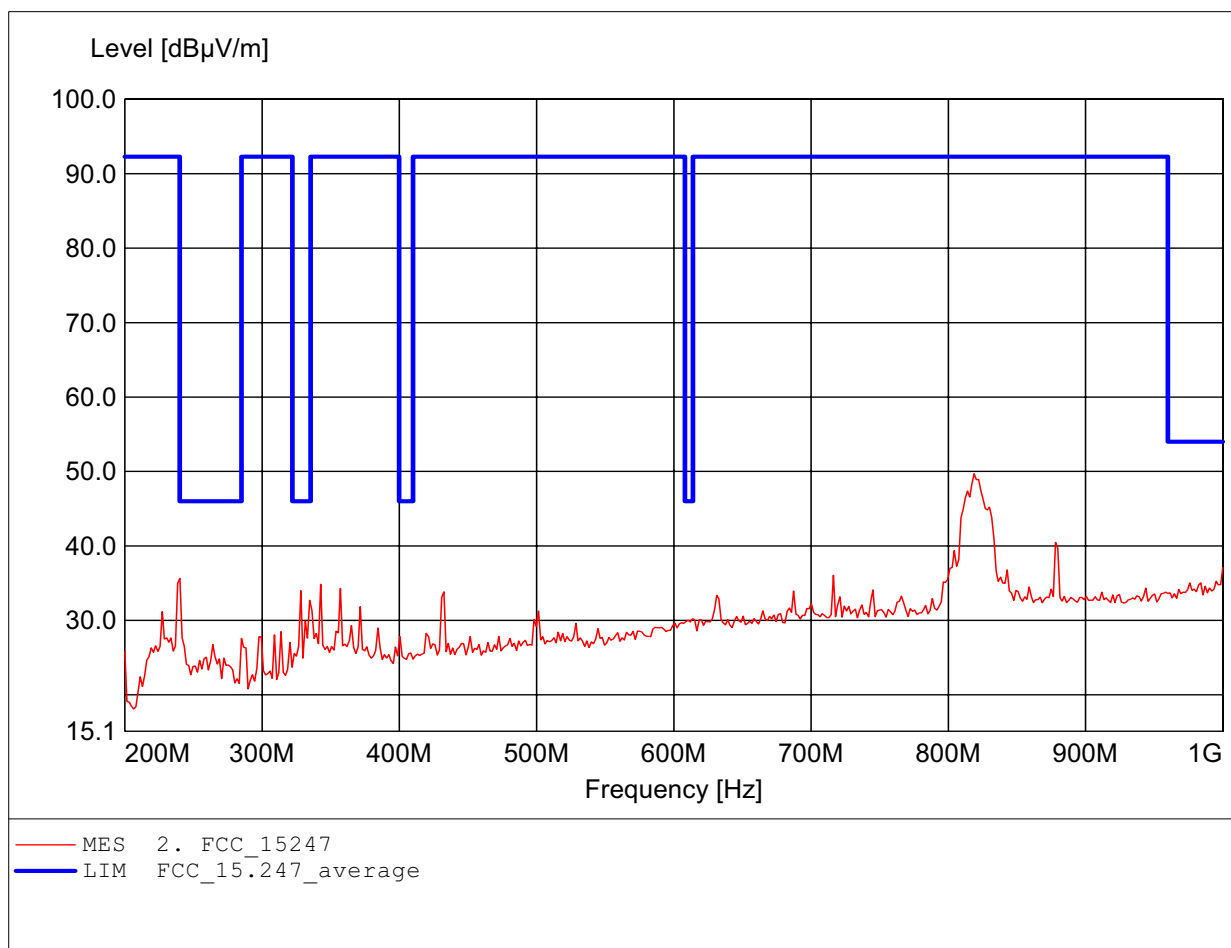

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL 223,
Freq: 820.441MHz, Emax: 46.16dBμV/m, RBW: 100kHz

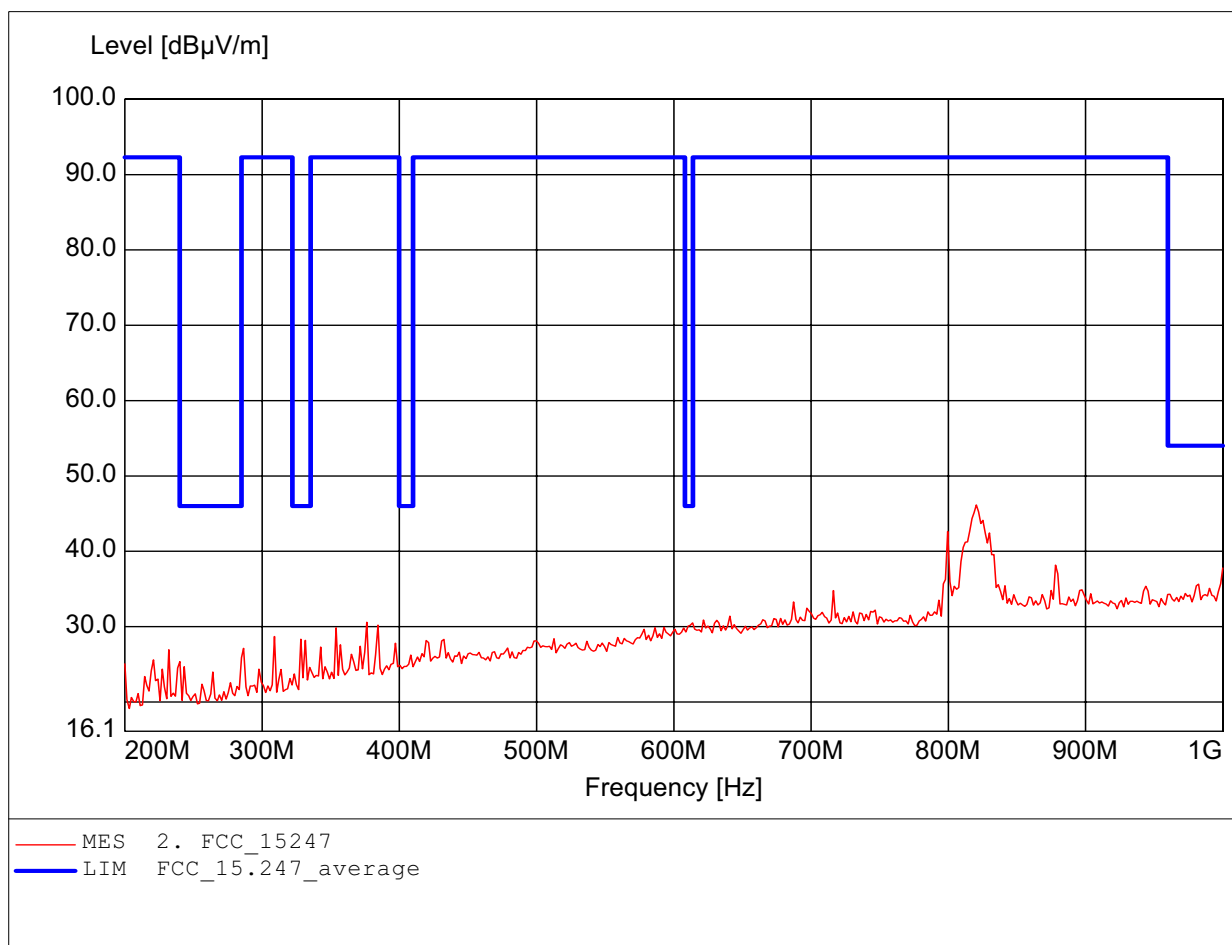

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, amplif.
Freq: 3.198GHz, Emax: 46.70dBμV/m, RBW: 1MHz

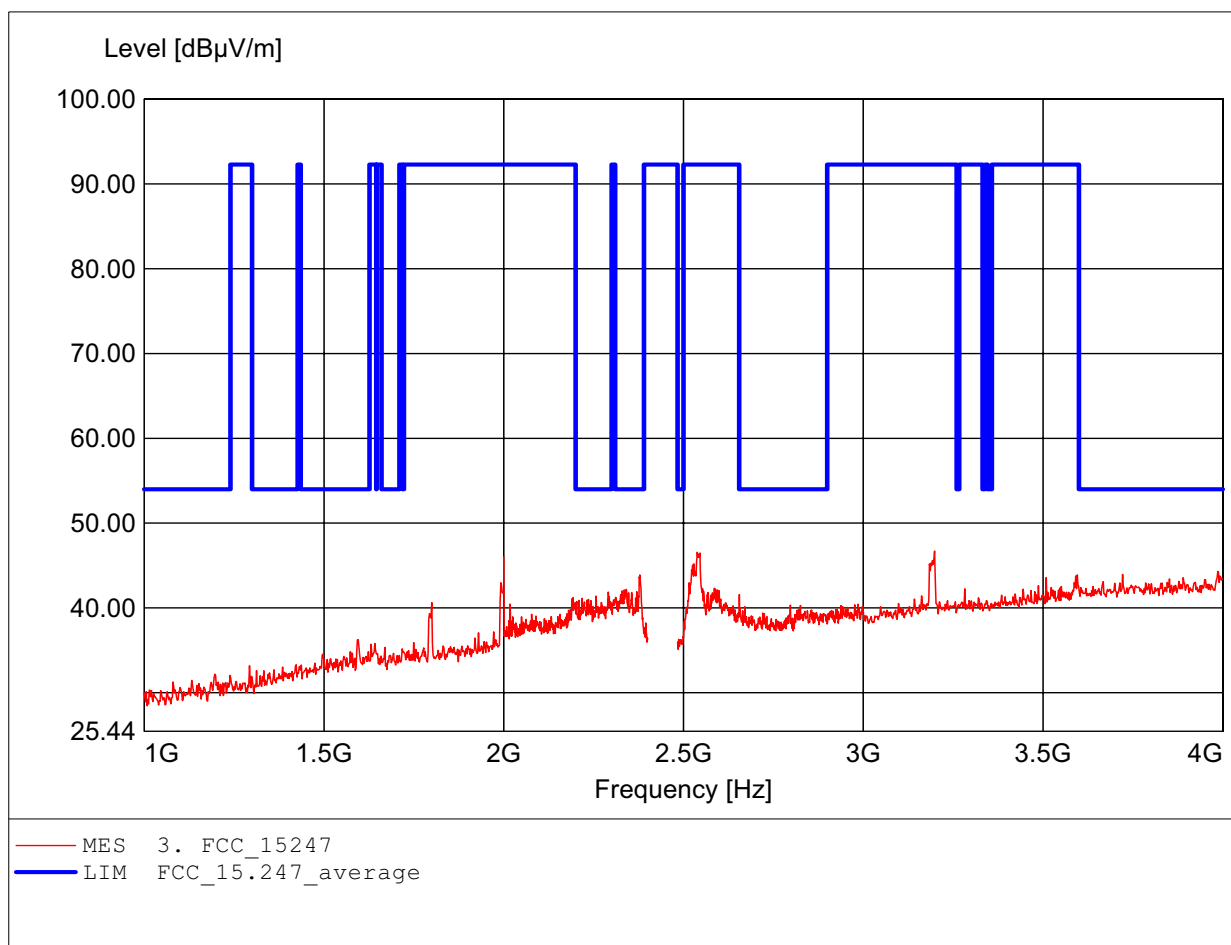

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Test Specification: according to §15.247 / LP 0002, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 2.538GHz, Emax: 51.45dBµV/m, RBW: 1MHz

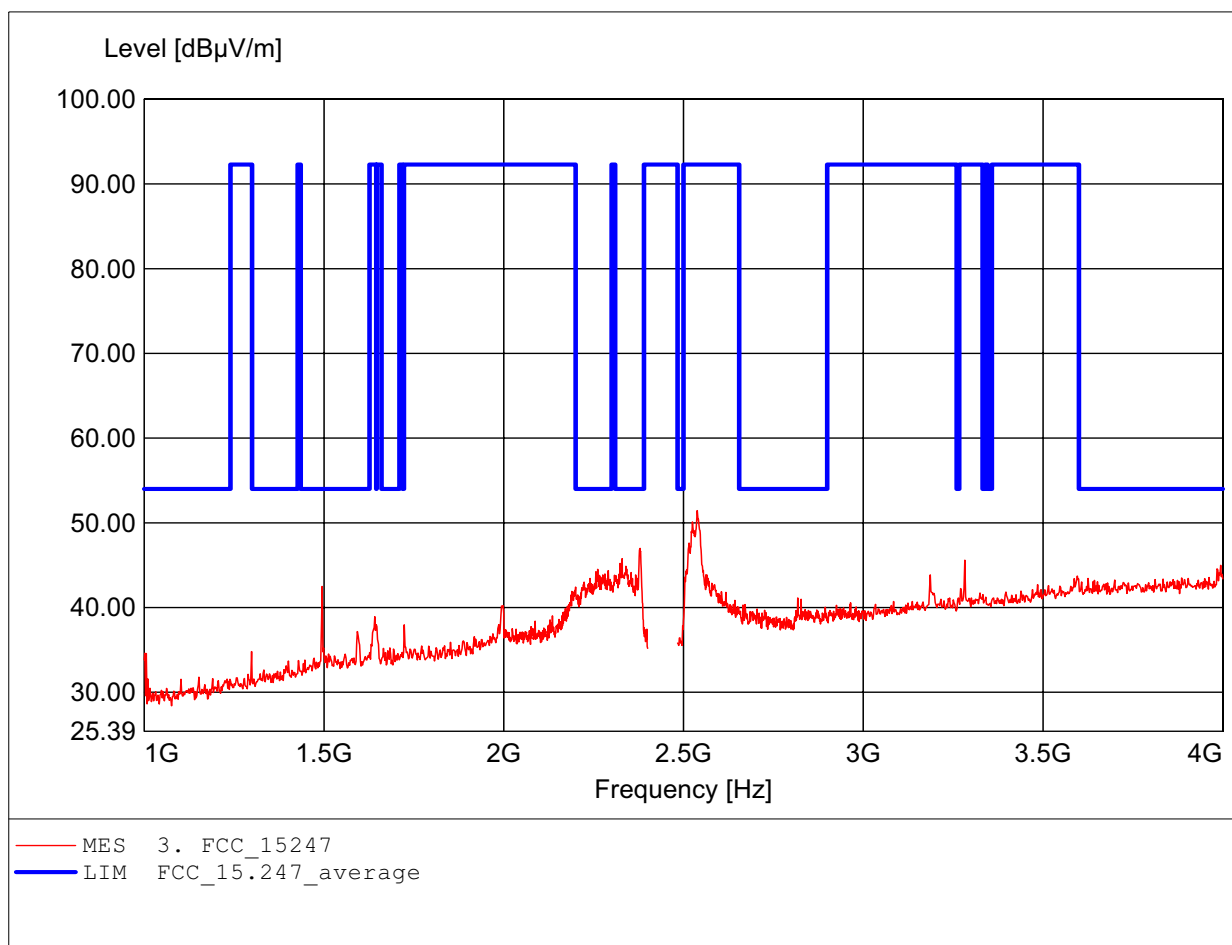

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 7.471GHz, Emax: 51.49dBμV/m, RBW: 1MHz

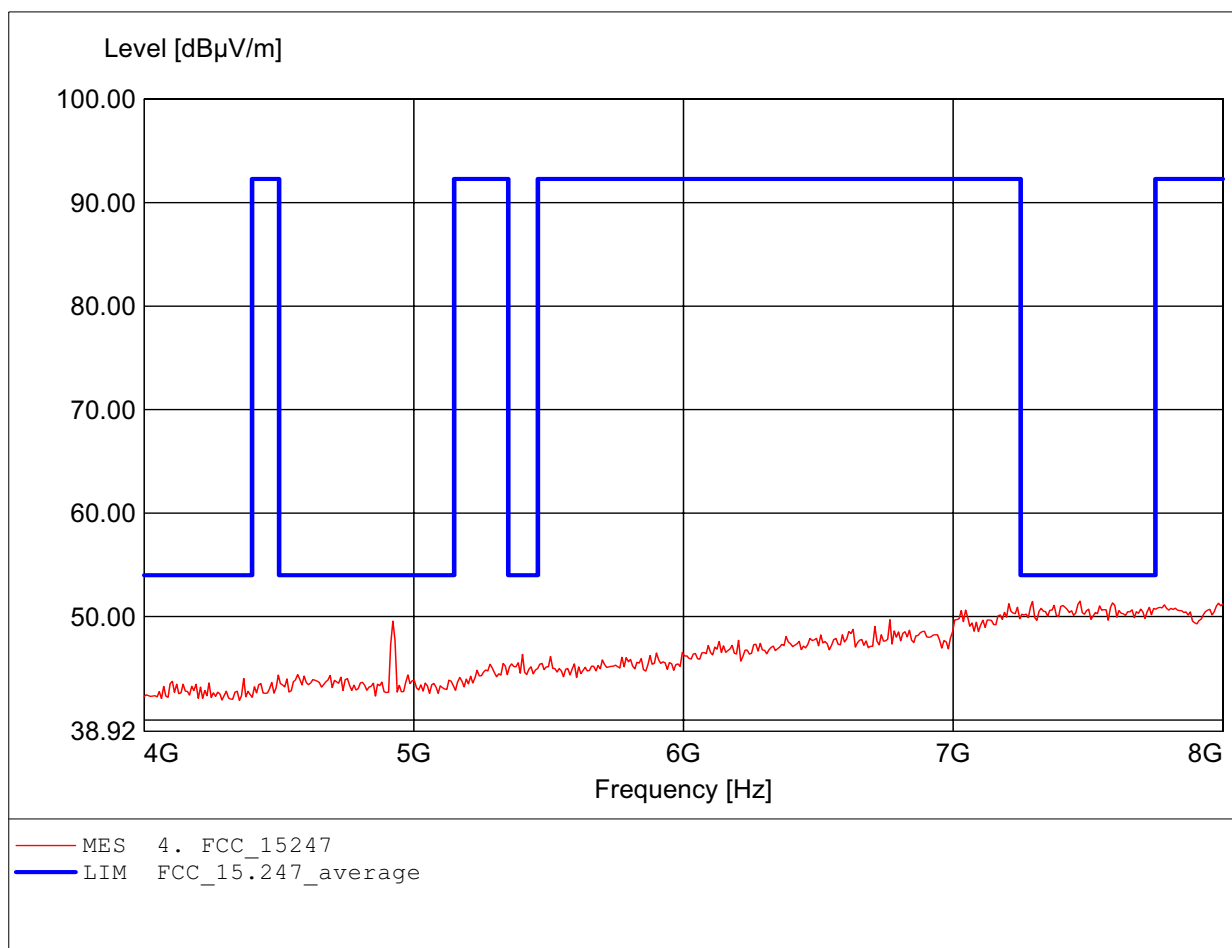

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 7.255GHz, Emax: 52.04dBμV/m, RBW: 1MHz

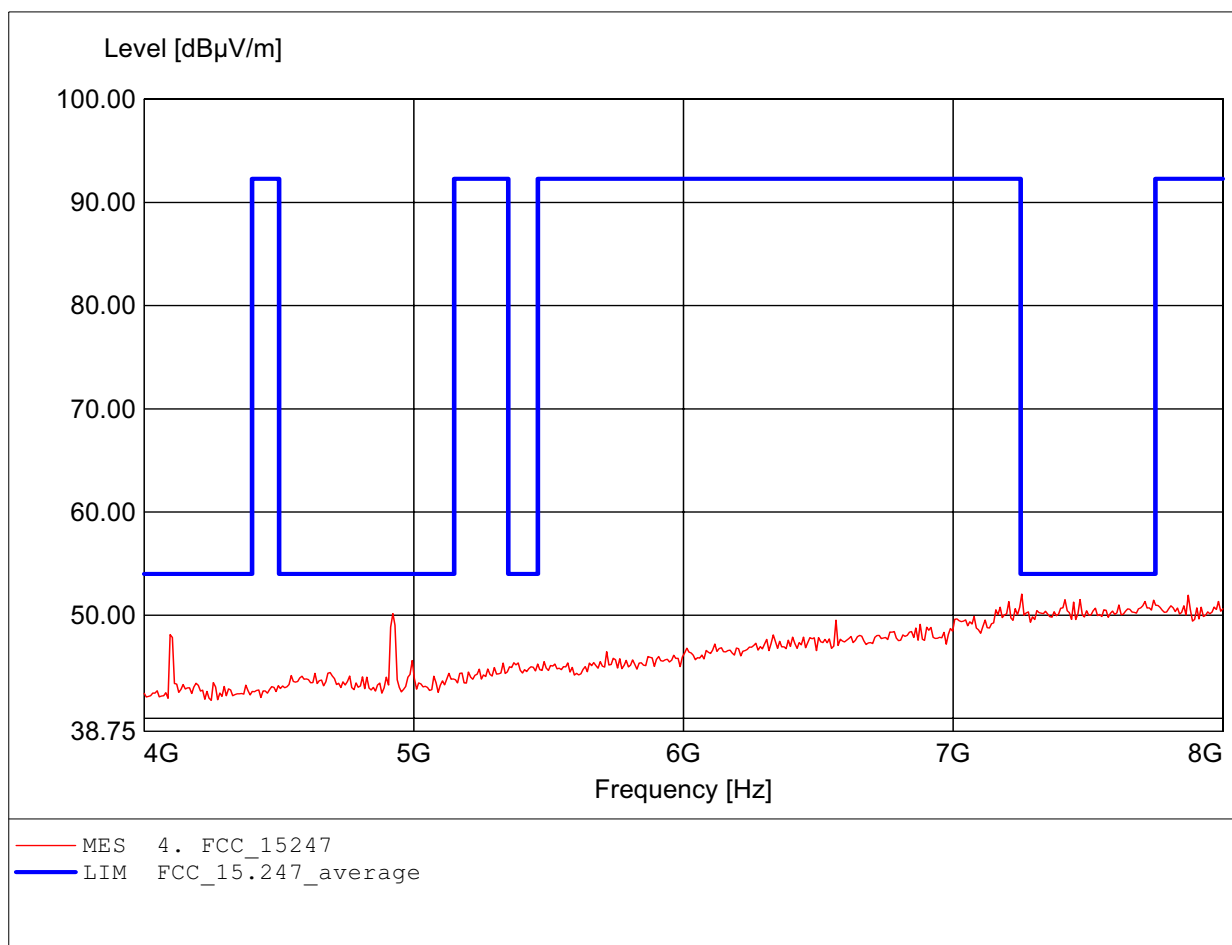

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 10.982GHz, Emax: 48.21dBμV/m, RBW: 1MHz

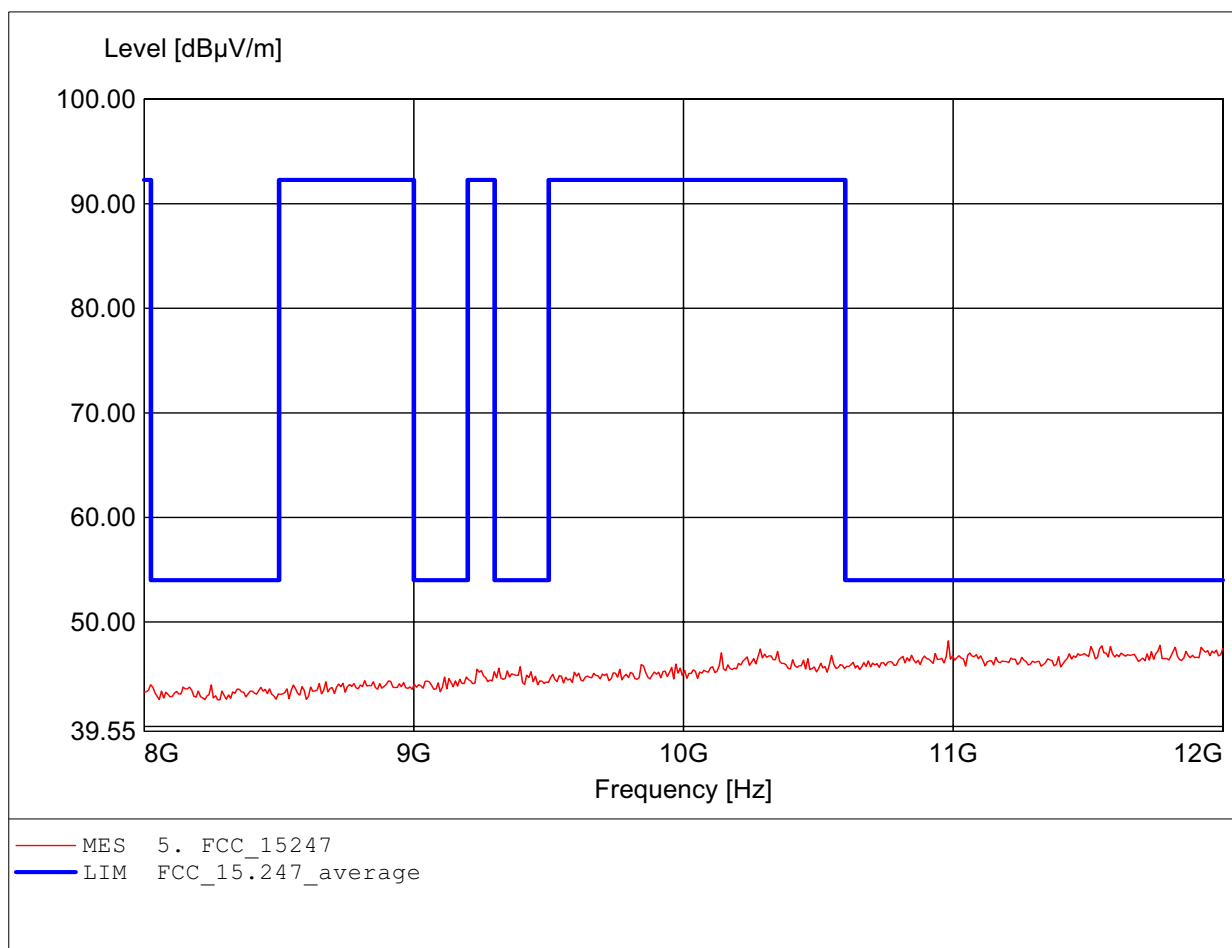

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, ampl.+HP.
Freq: 11.487GHz, Emax: 48.17dBμV/m, RBW: 1MHz

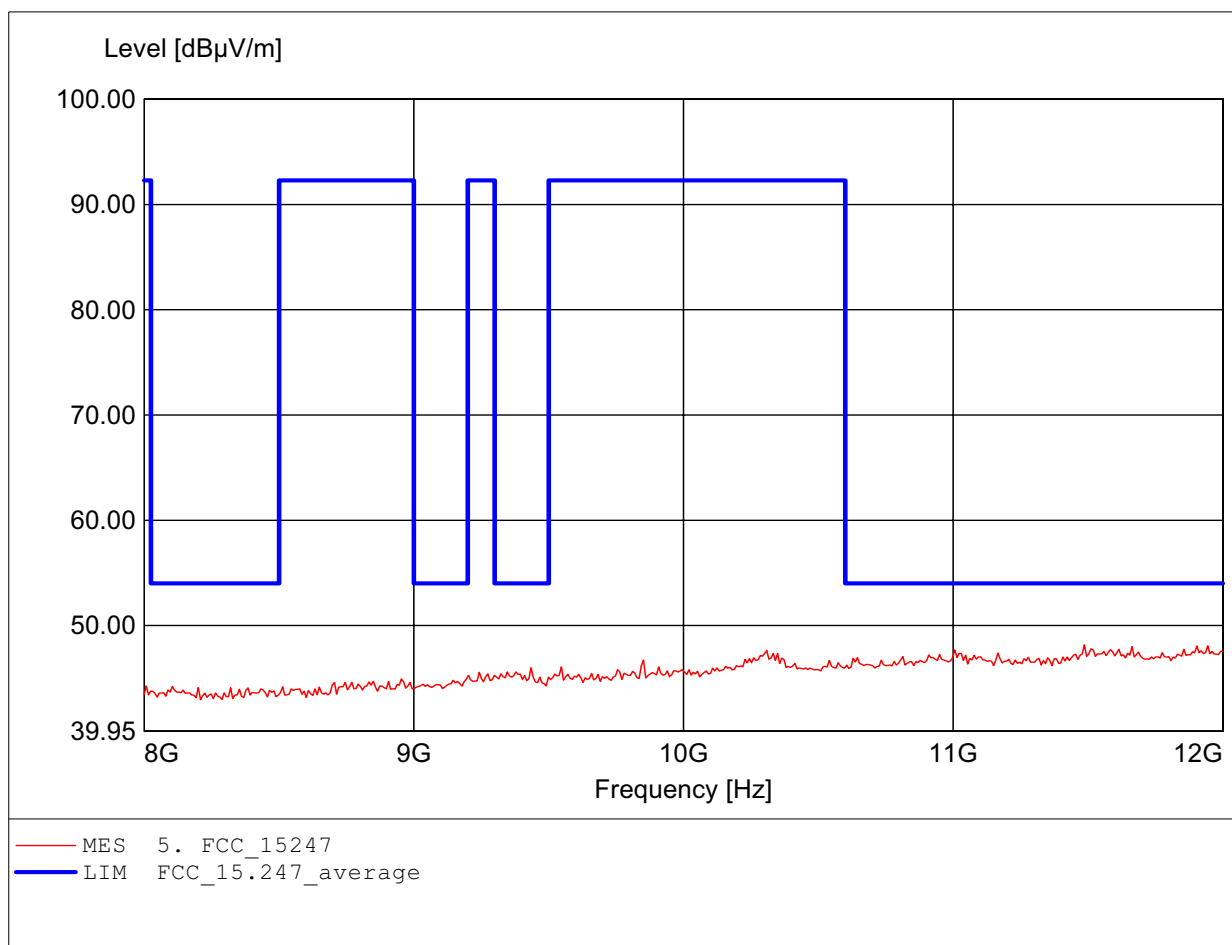

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, ampl.+HP.
Freq: 17.784GHz, Emax: 51.69dBμV/m, RBW: 1MHz

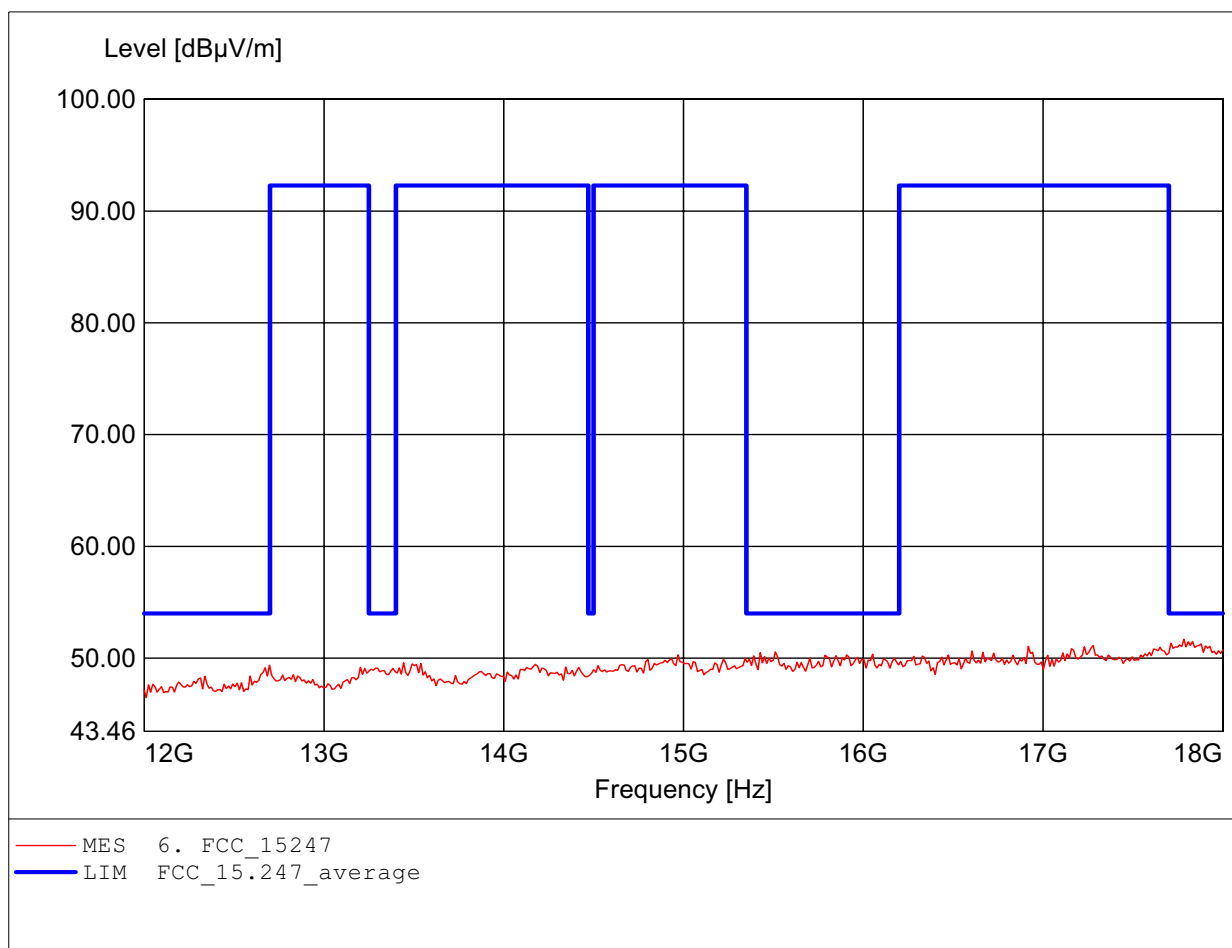

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, ampl.+HP.
Freq: 17.868GHz, Emax: 52.40dBμV/m, RBW: 1MHz

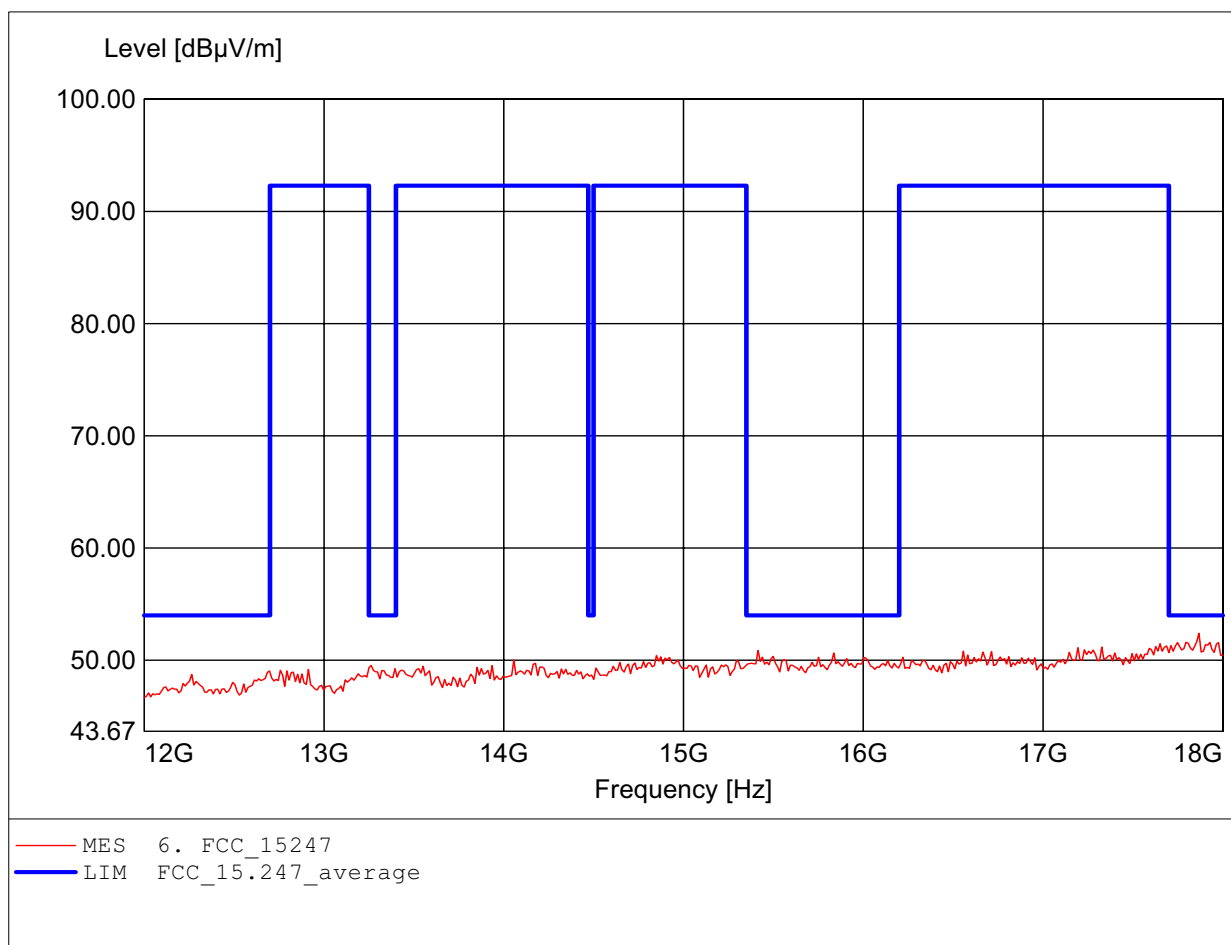

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, amplif.
Freq: 26.398GHz, Emax: 52.22dBμV/m, RBW: 1MHz

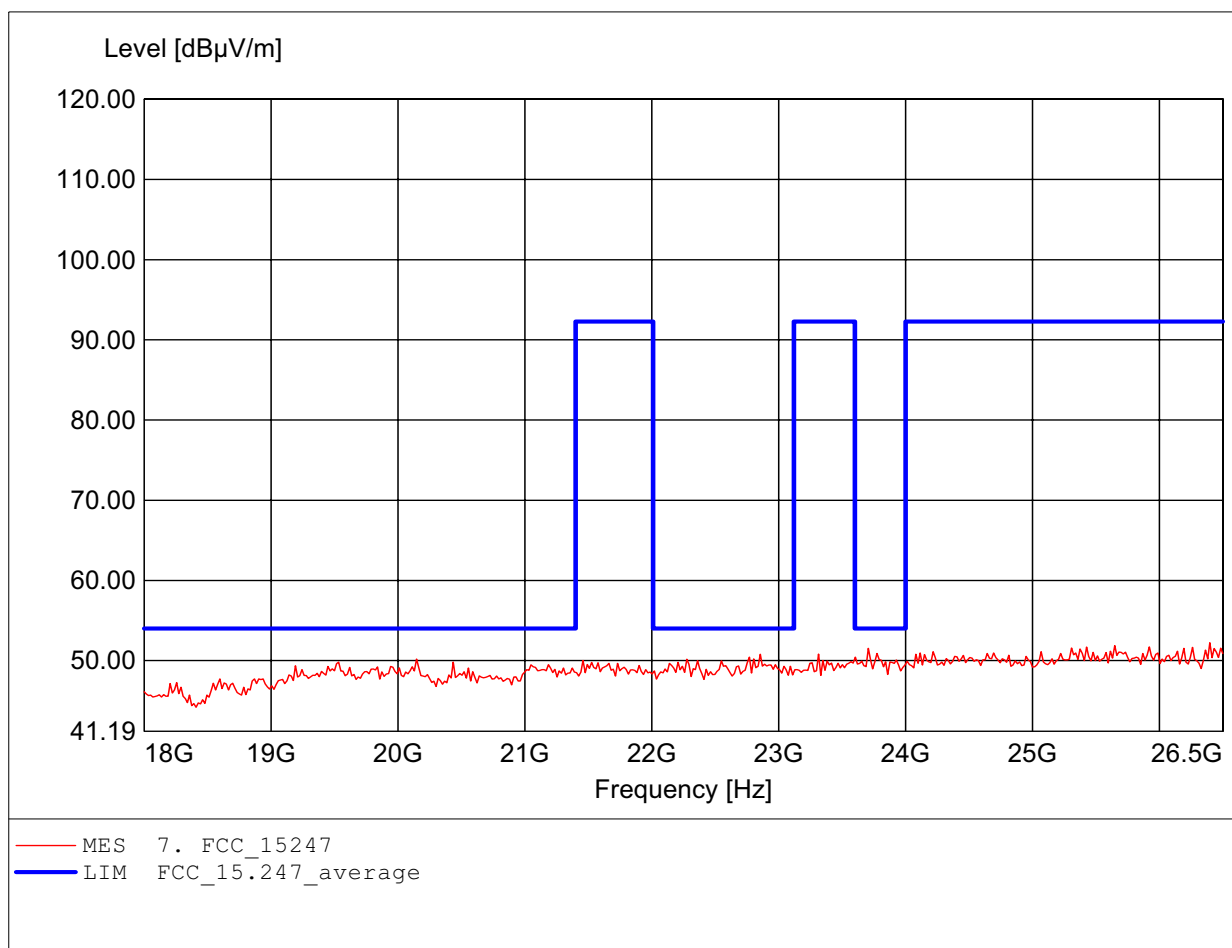

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11b ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, amplif.
Freq: 25.921GHz, Emax: 51.95dBμV/m, RBW: 1MHz

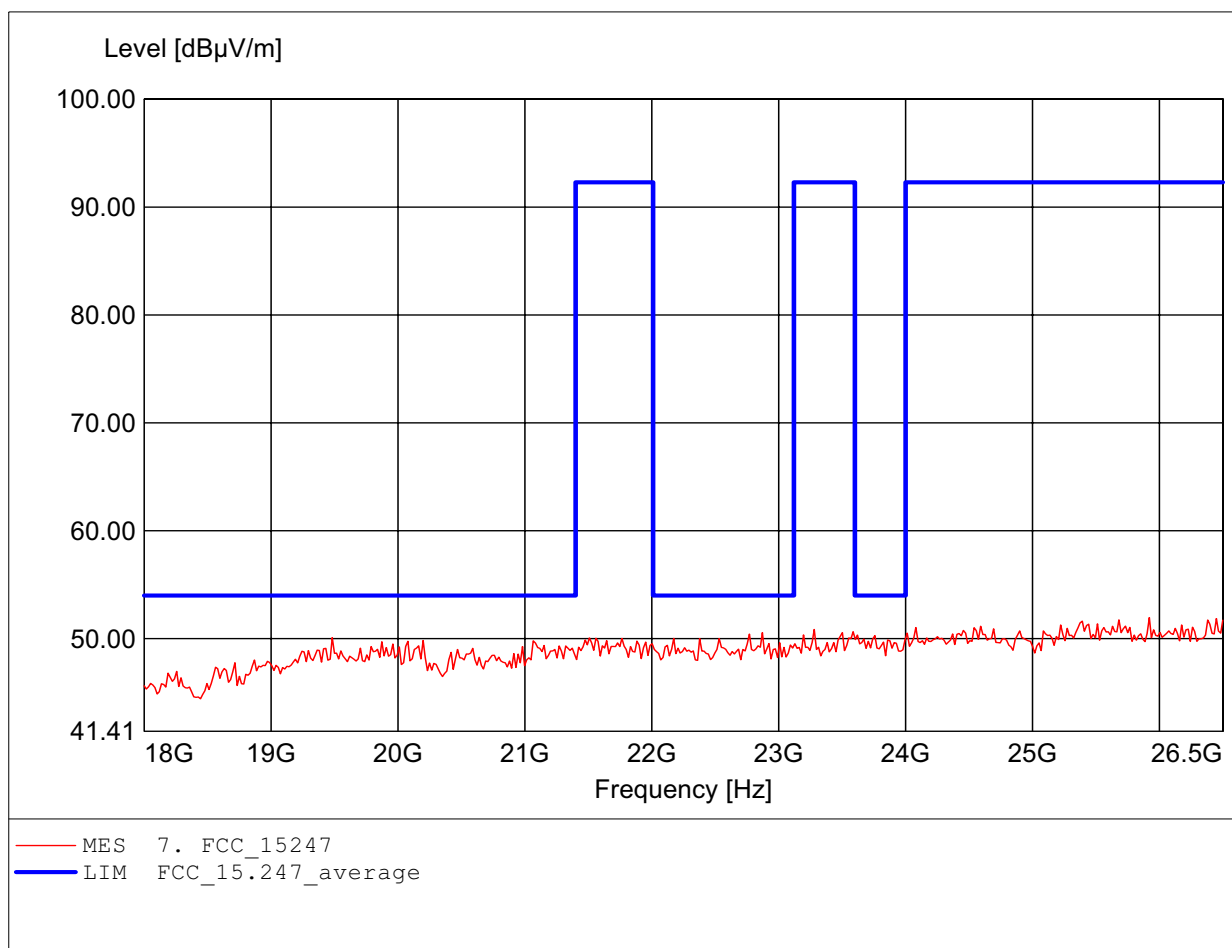

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HK 116
Freq: 119.259MHz, Emax: 33.07dBµV/m, RBW: 100kHz

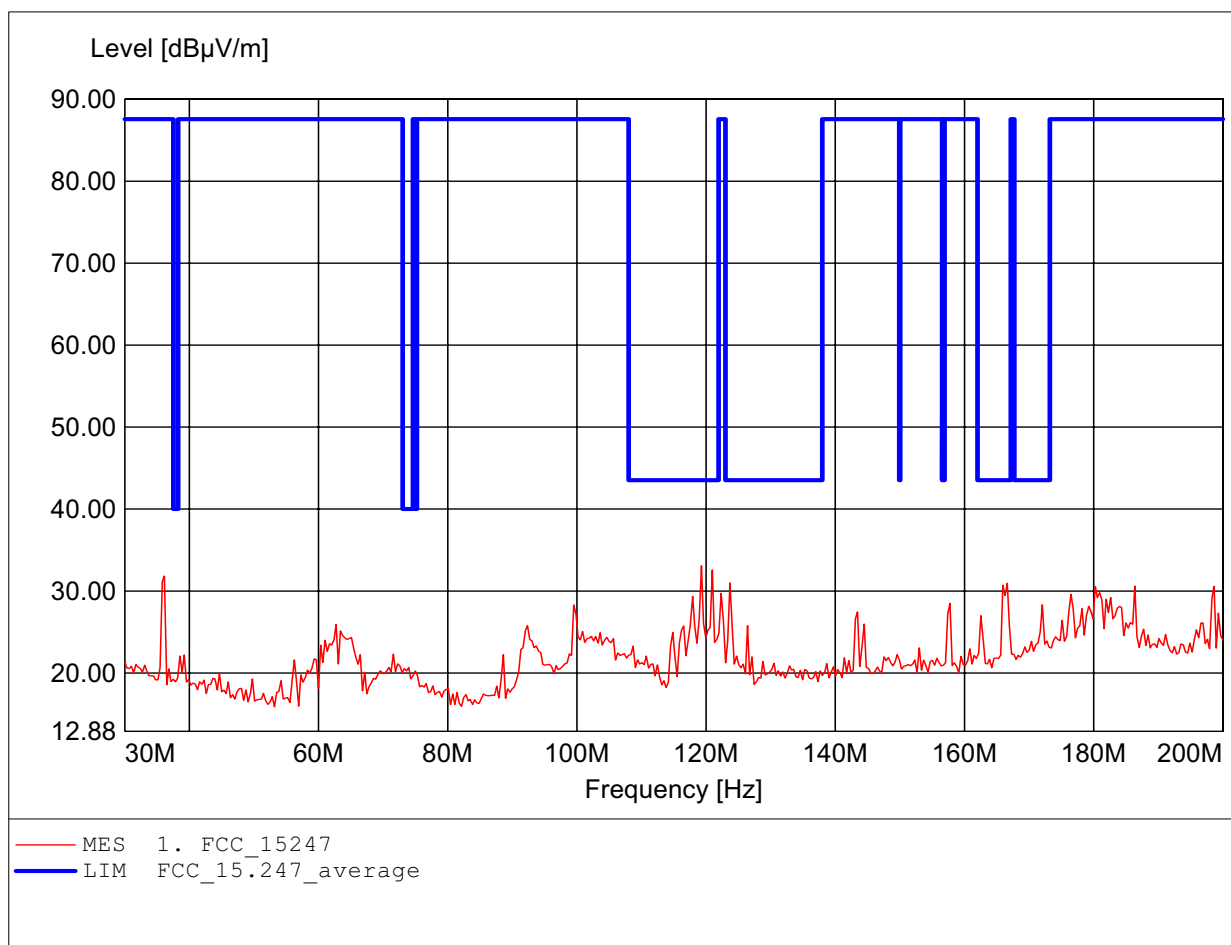

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HK 116
Freq: 35.792MHz, Emax: 33.86dBμV/m, RBW: 100kHz

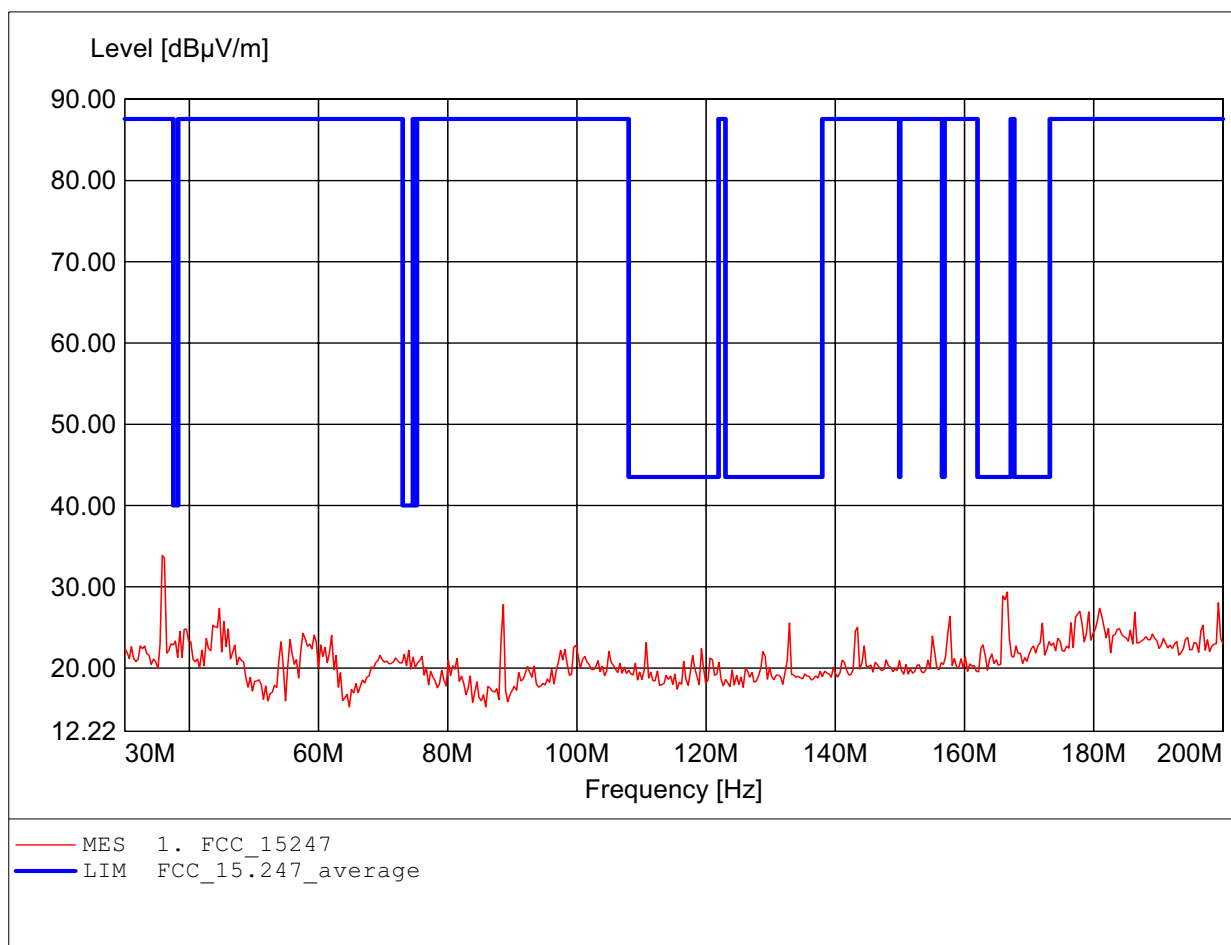

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL 223,
Freq: 799.599MHz, Emax: 42.93dBμV/m, RBW: 100kHz

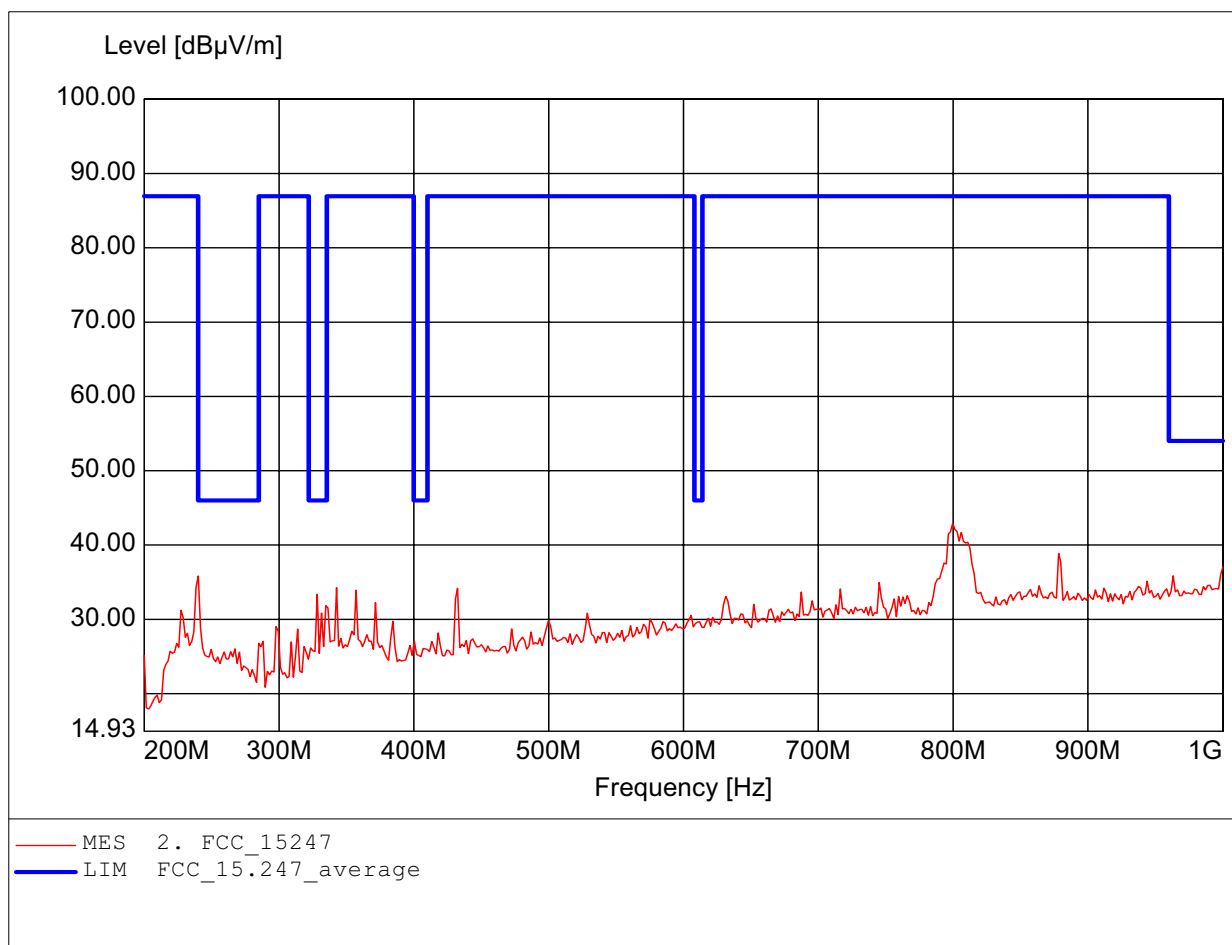

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL 223,
Freq: 799.599MHz, Emax: 44.27dBμV/m, RBW: 100kHz

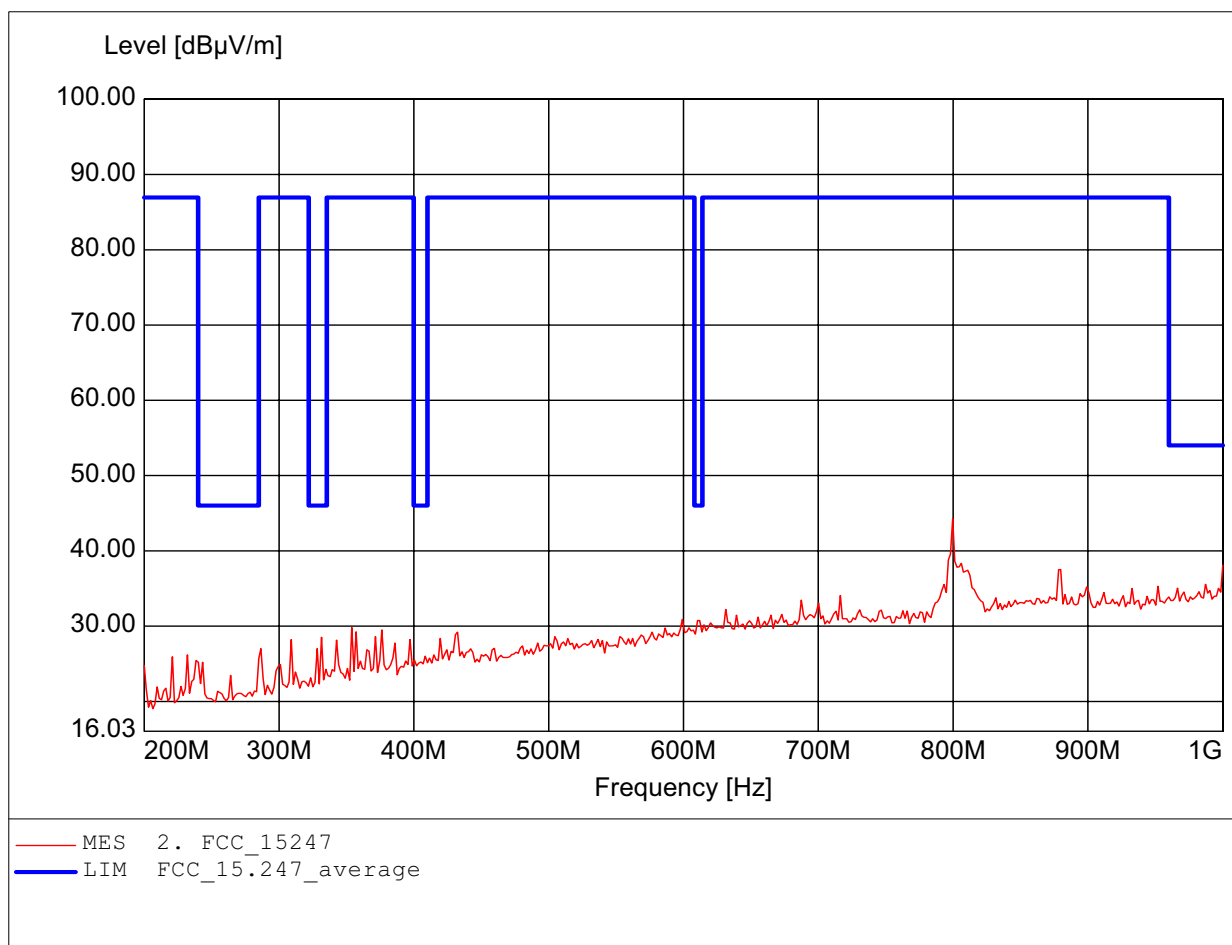

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, amplif.
Freq: 3.214GHz, Emax: 54.72dBμV/m, RBW: 1MHz

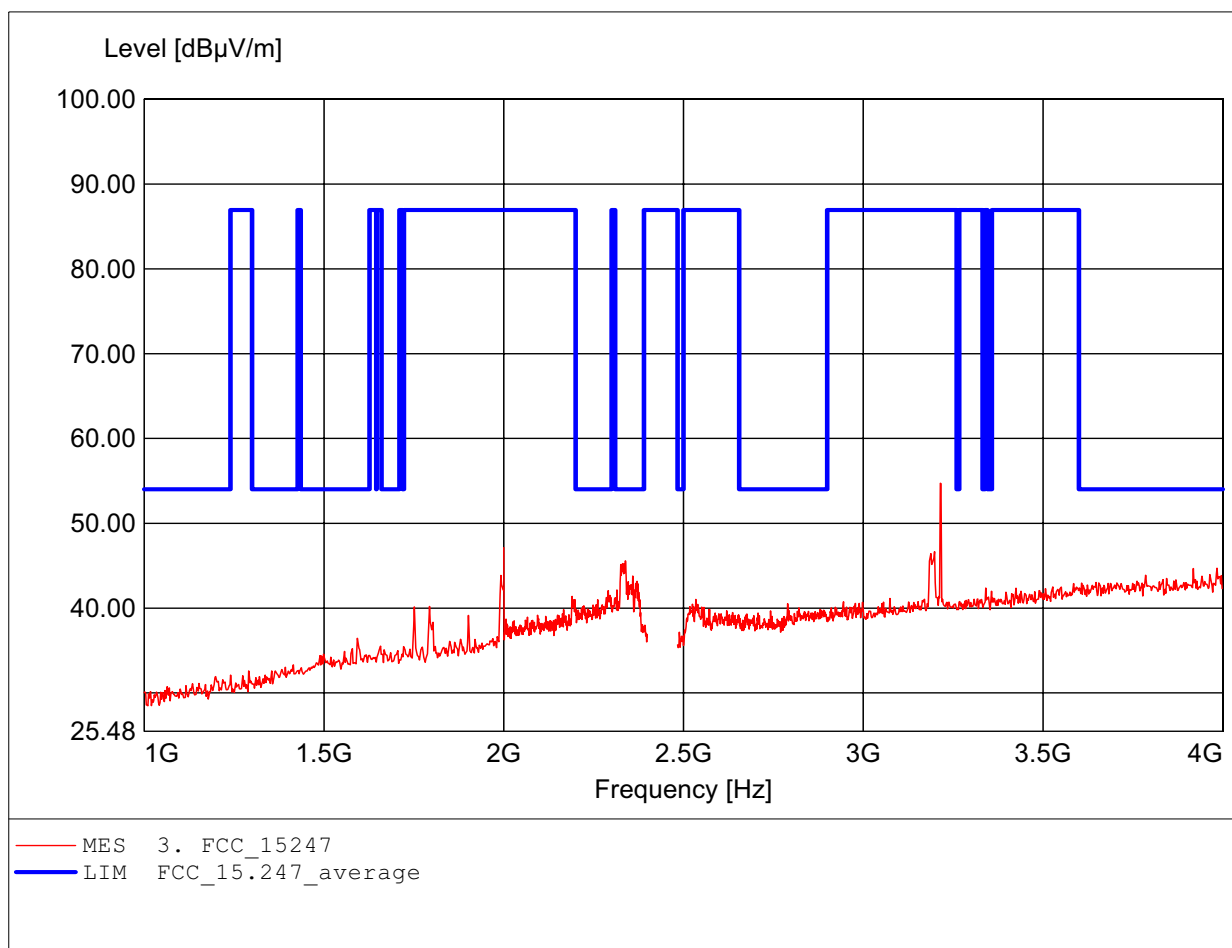

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, amplif.
Freq: 3.216GHz, Emax: 53.91dBμV/m, RBW: 1MHz

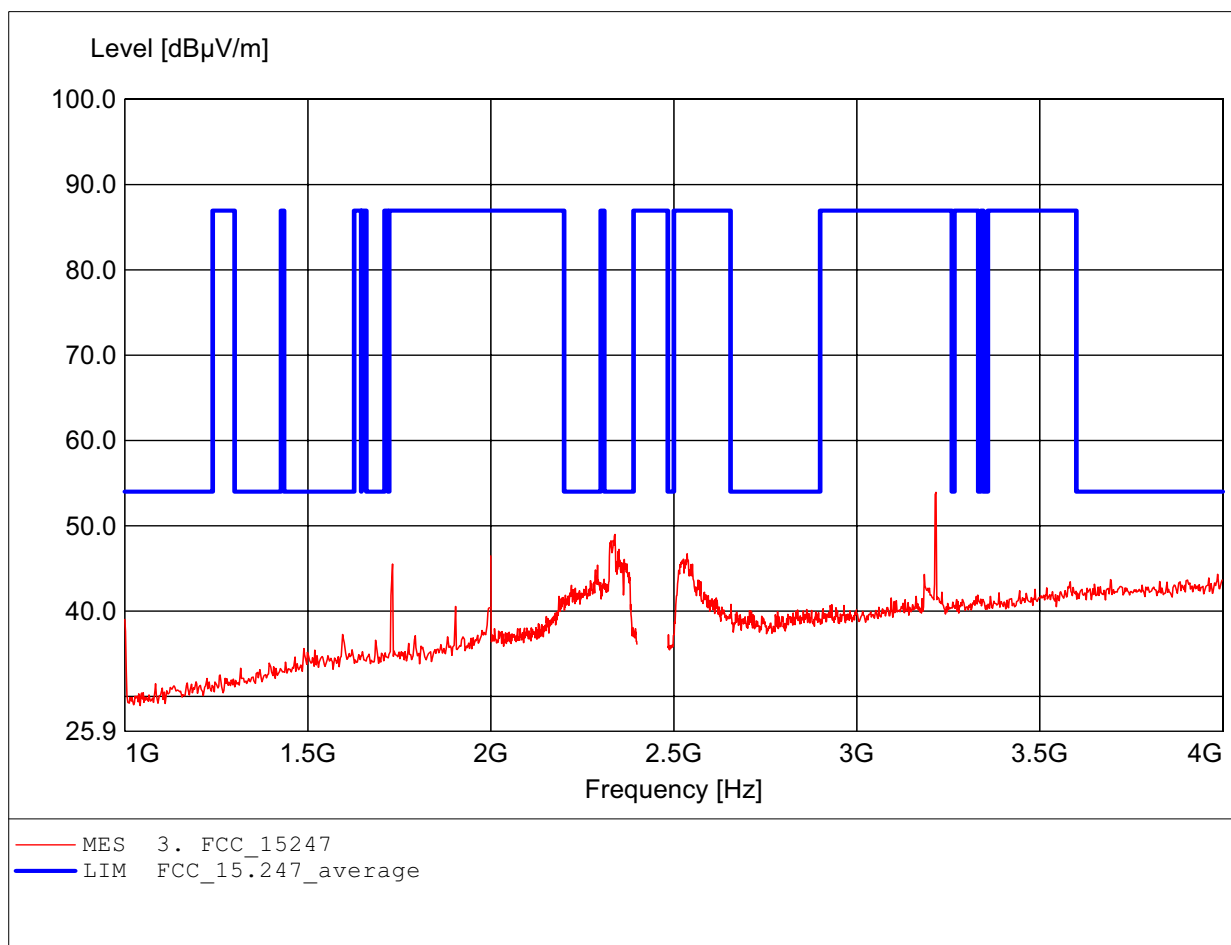

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 7.984GHz, Emax: 53.12dBμV/m, RBW: 1MHz

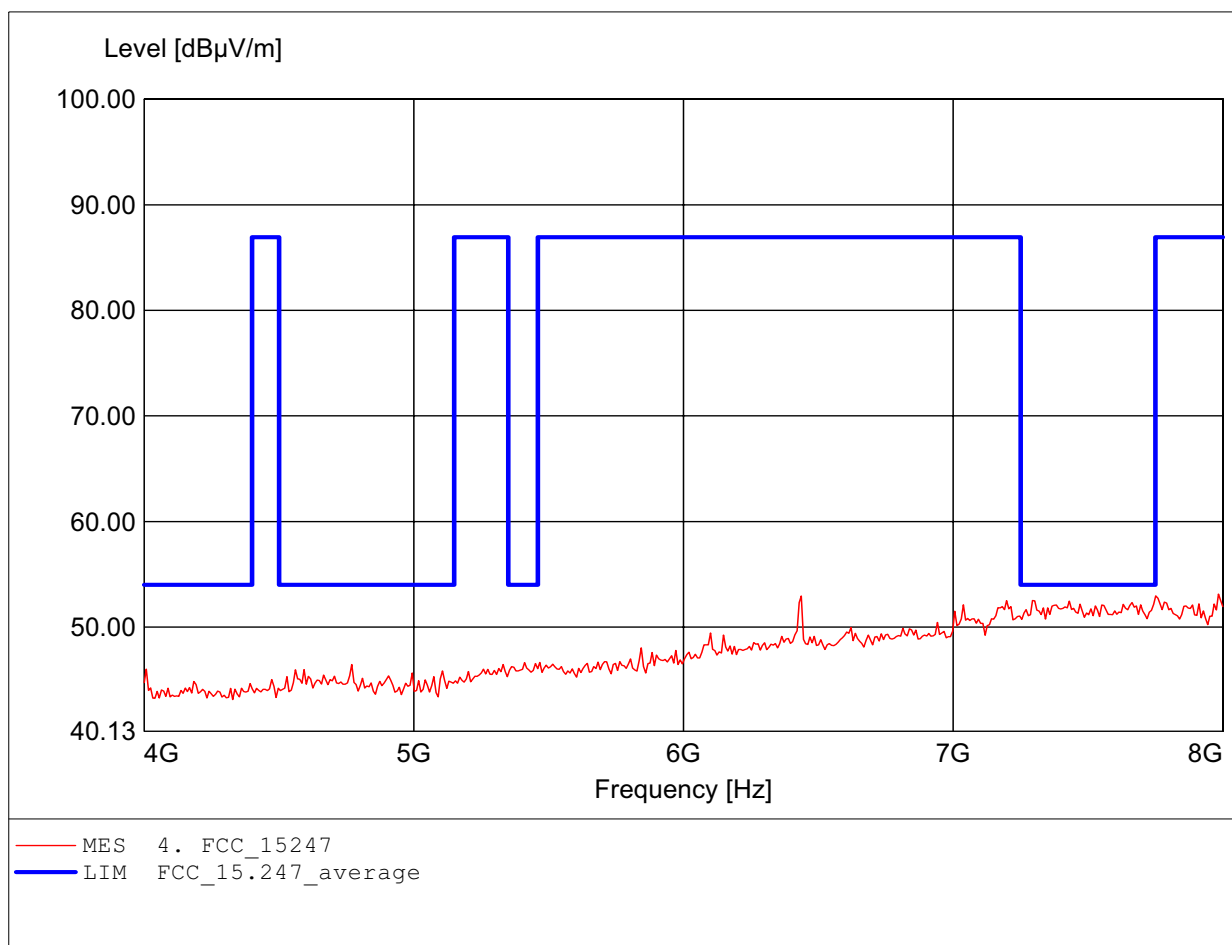

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 8.000GHz, Emax: 53.15dBµV/m, RBW: 1MHz

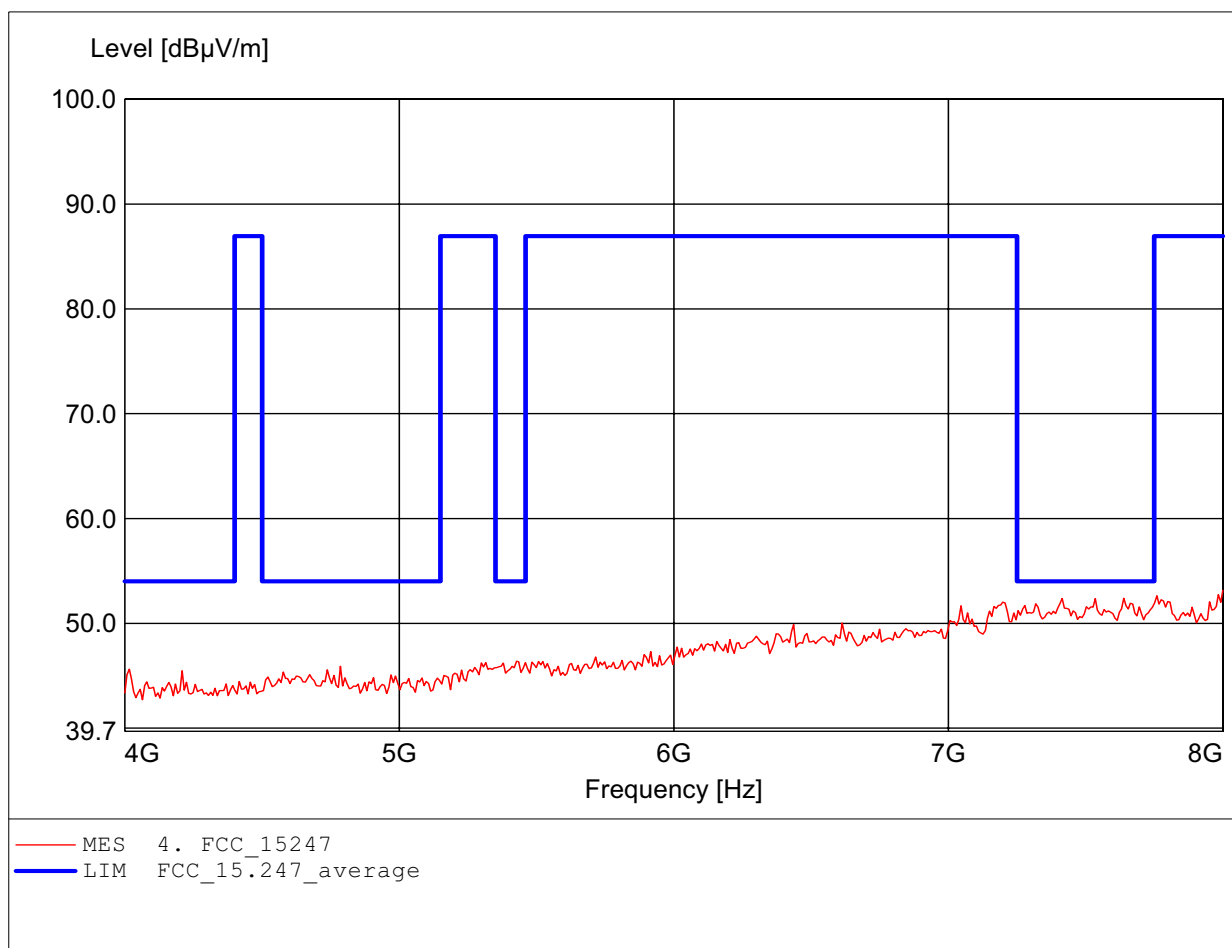

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 11.968GHz, Emax: 48.73dBμV/m, RBW: 1MHz

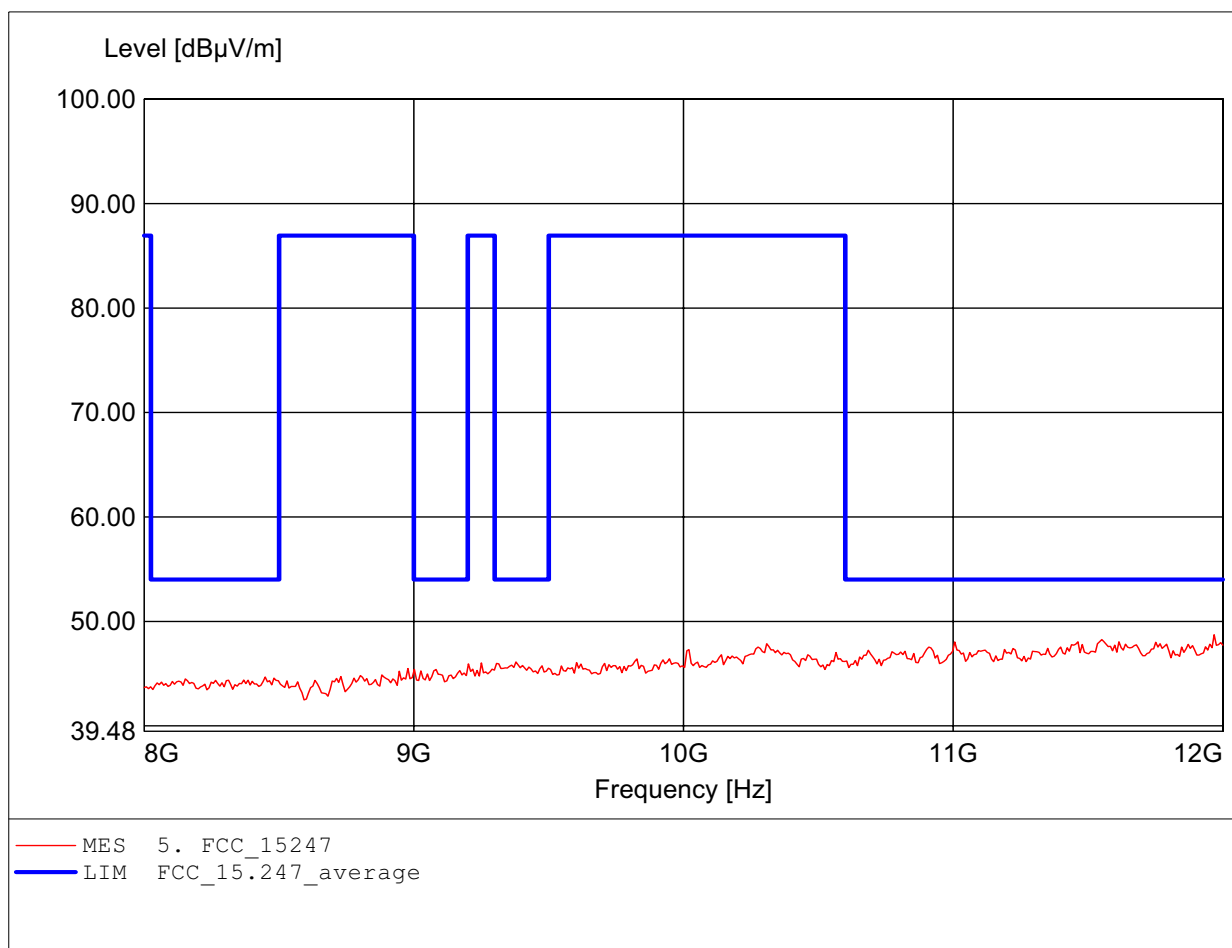

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 11.968GHz, Emax: 49.00dBμV/m, RBW: 1MHz

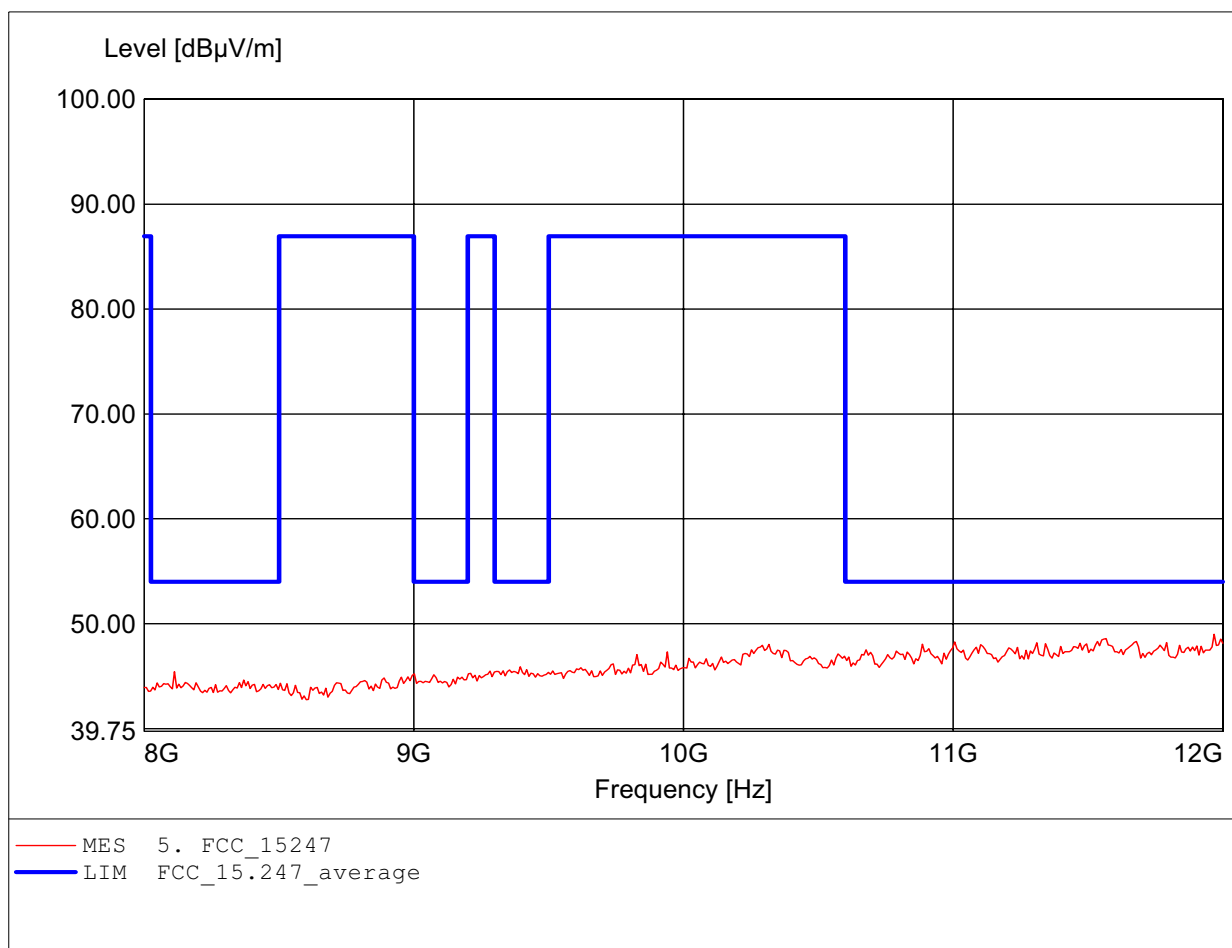

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 17.651GHz, Emax: 52.40dBμV/m, RBW: 1MHz

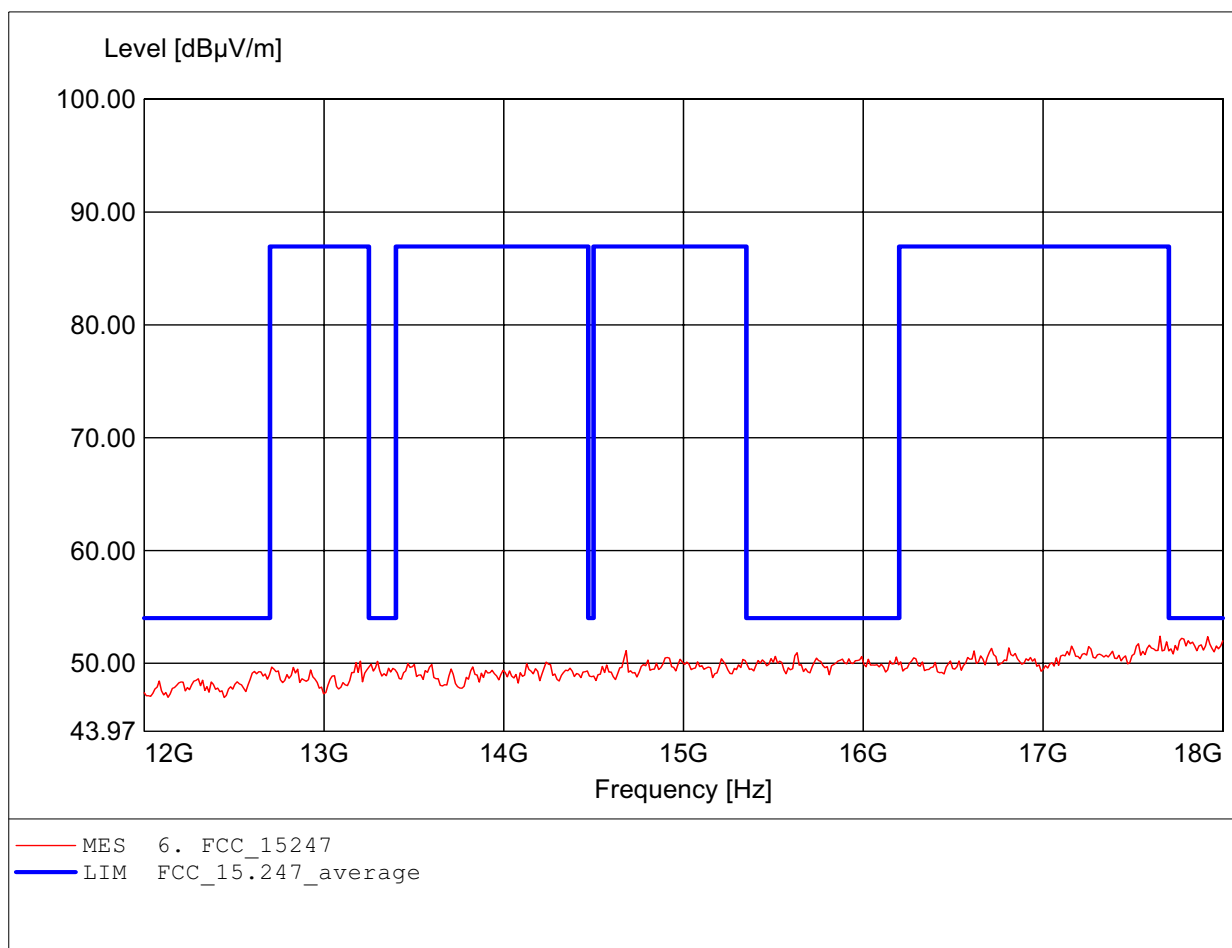

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 17.820GHz, Emax: 52.55dBμV/m, RBW: 1MHz

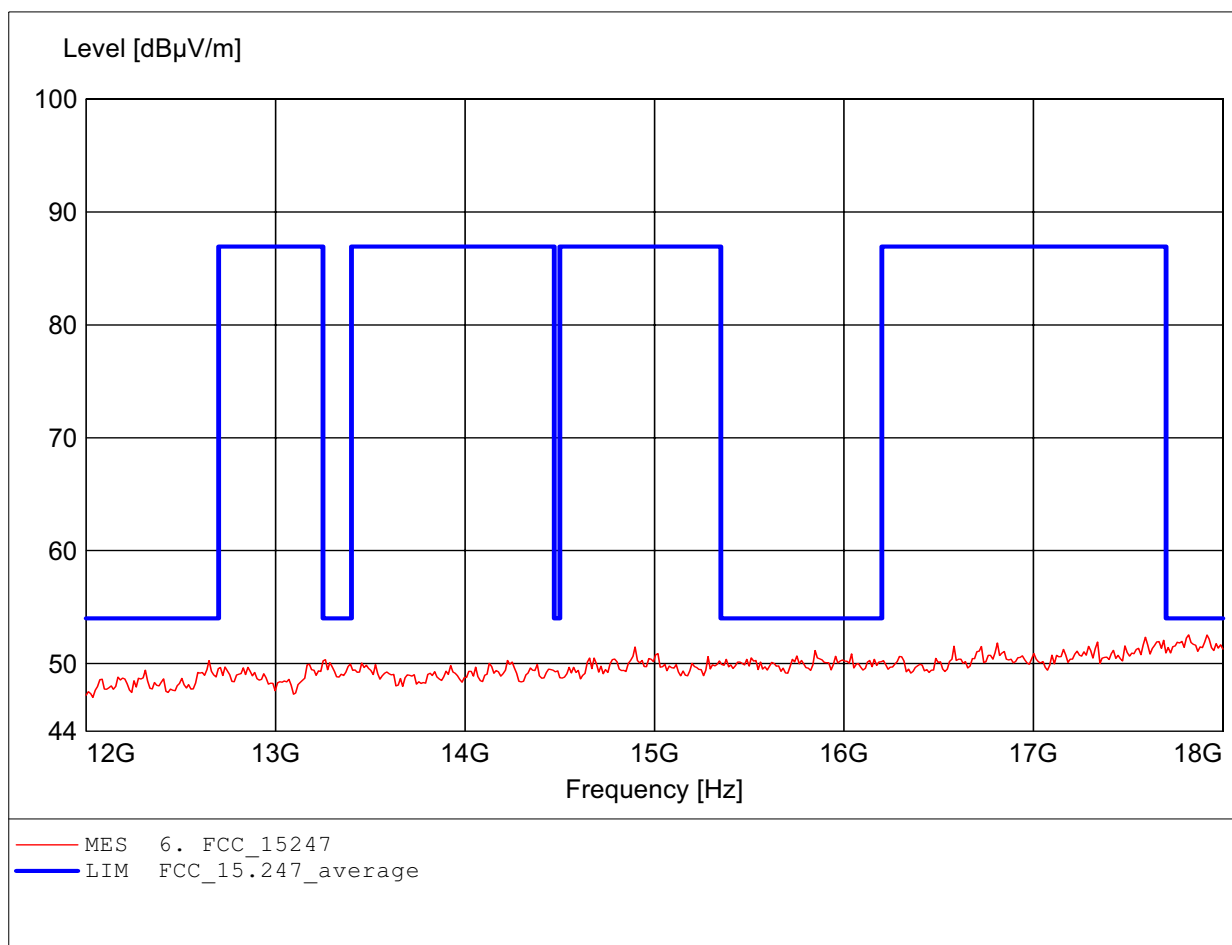

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, amplif.
Freq: 26.347GHz, Emax: 52.69dBμV/m, RBW: 1MHz

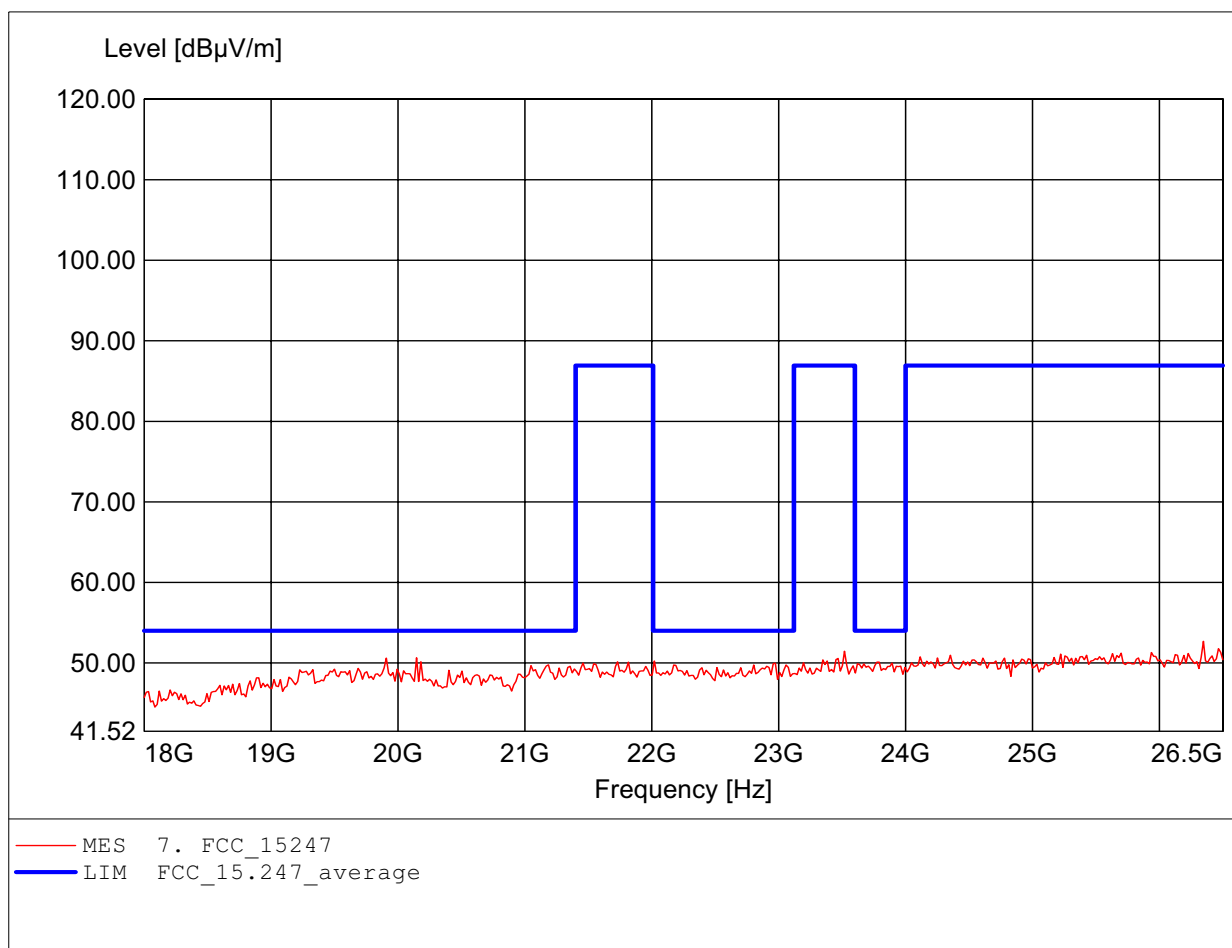

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, amplif.
Freq: 25.359GHz, Emax: 51.96dBμV/m, RBW: 1MHz

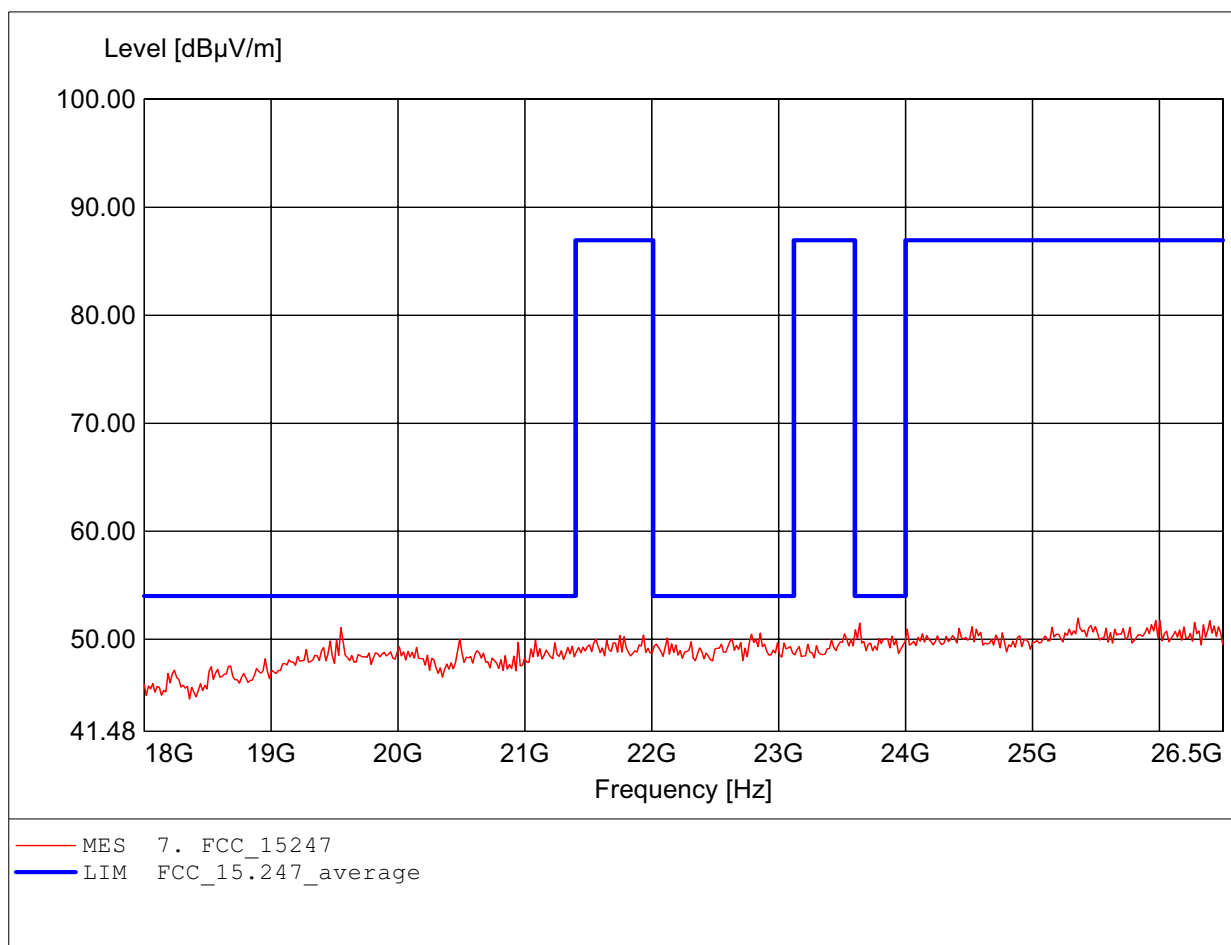

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HK 116
Freq: 180.581MHz, Emax: 33.80dBµV/m, RBW: 100kHz

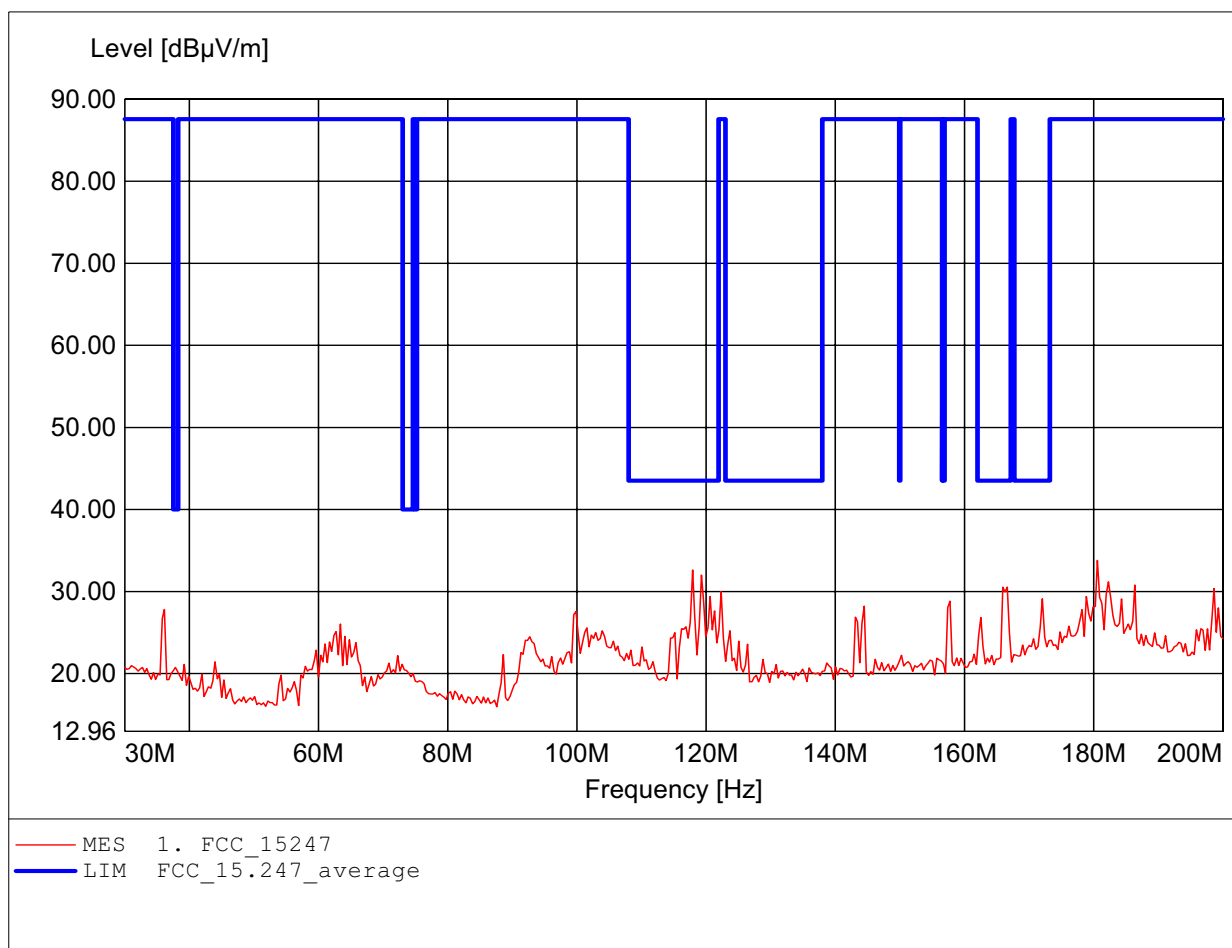

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HK 116
Freq: 36.132MHz, Emax: 32.97dBμV/m, RBW: 100kHz

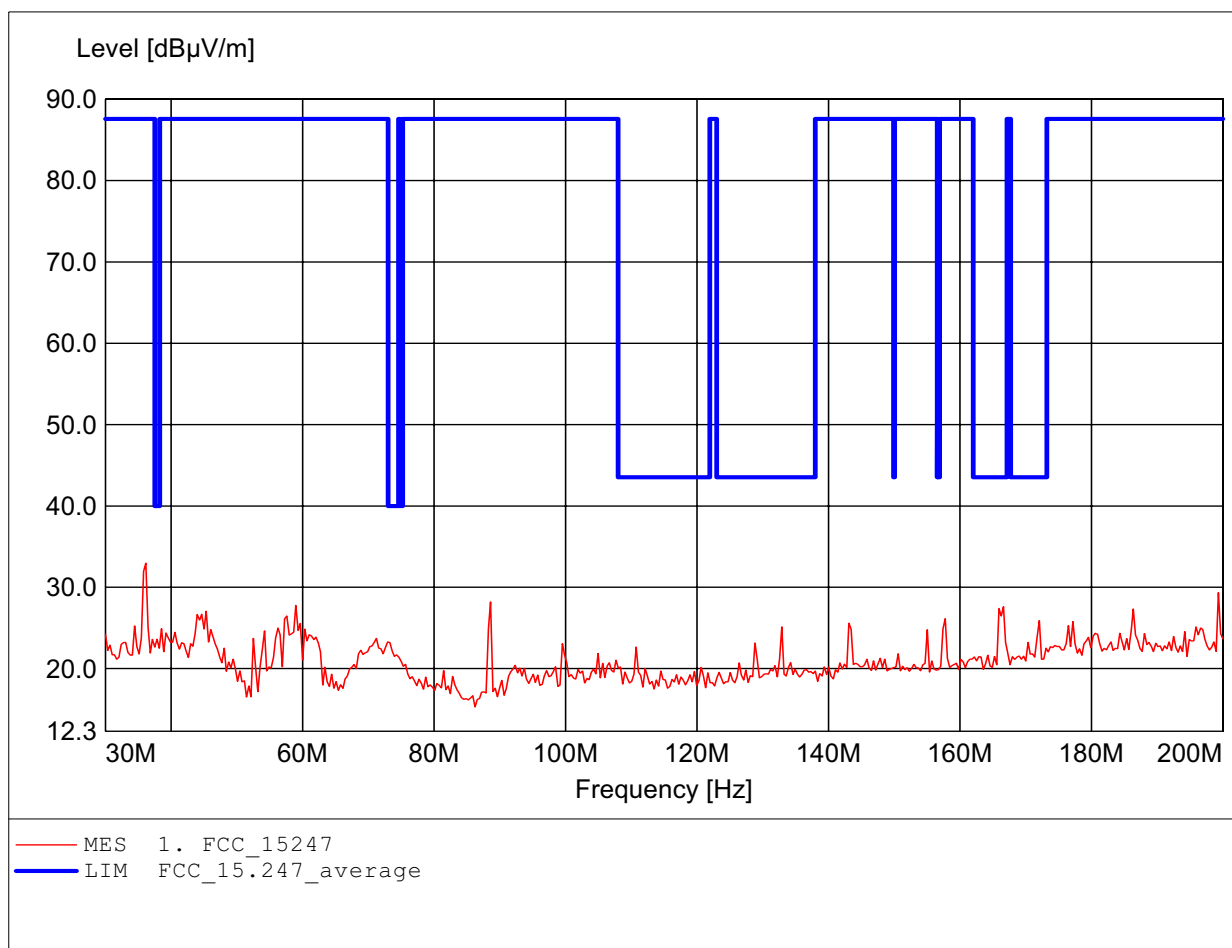

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL 223,
Freq: 807.615MHz, Emax: 43.92dBμV/m, RBW: 100kHz

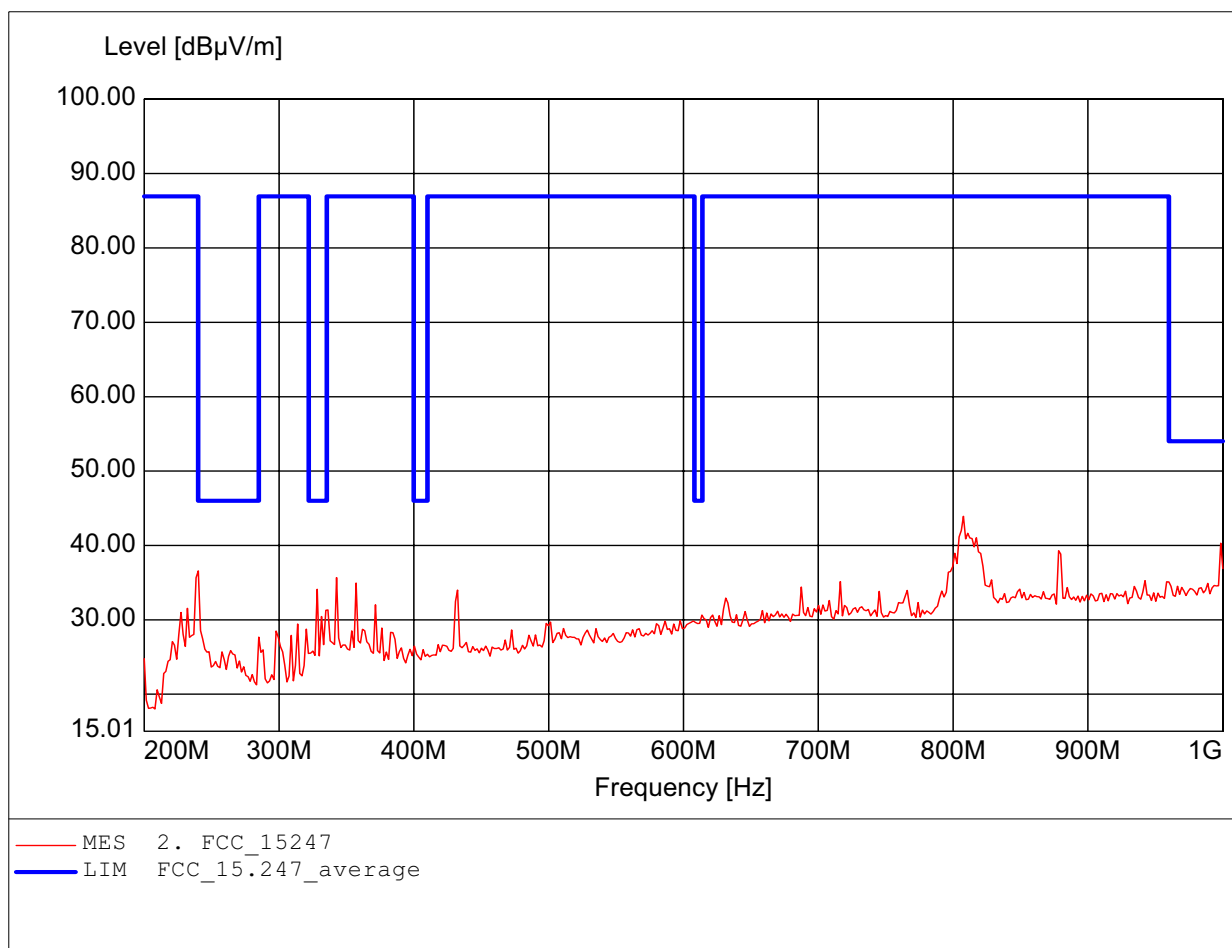

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch6
Test Site / Operator: ETS / Charles
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL 223,
Freq: 807.615MHz, Emax: 38.14dBμV/m, RBW: 100kHz

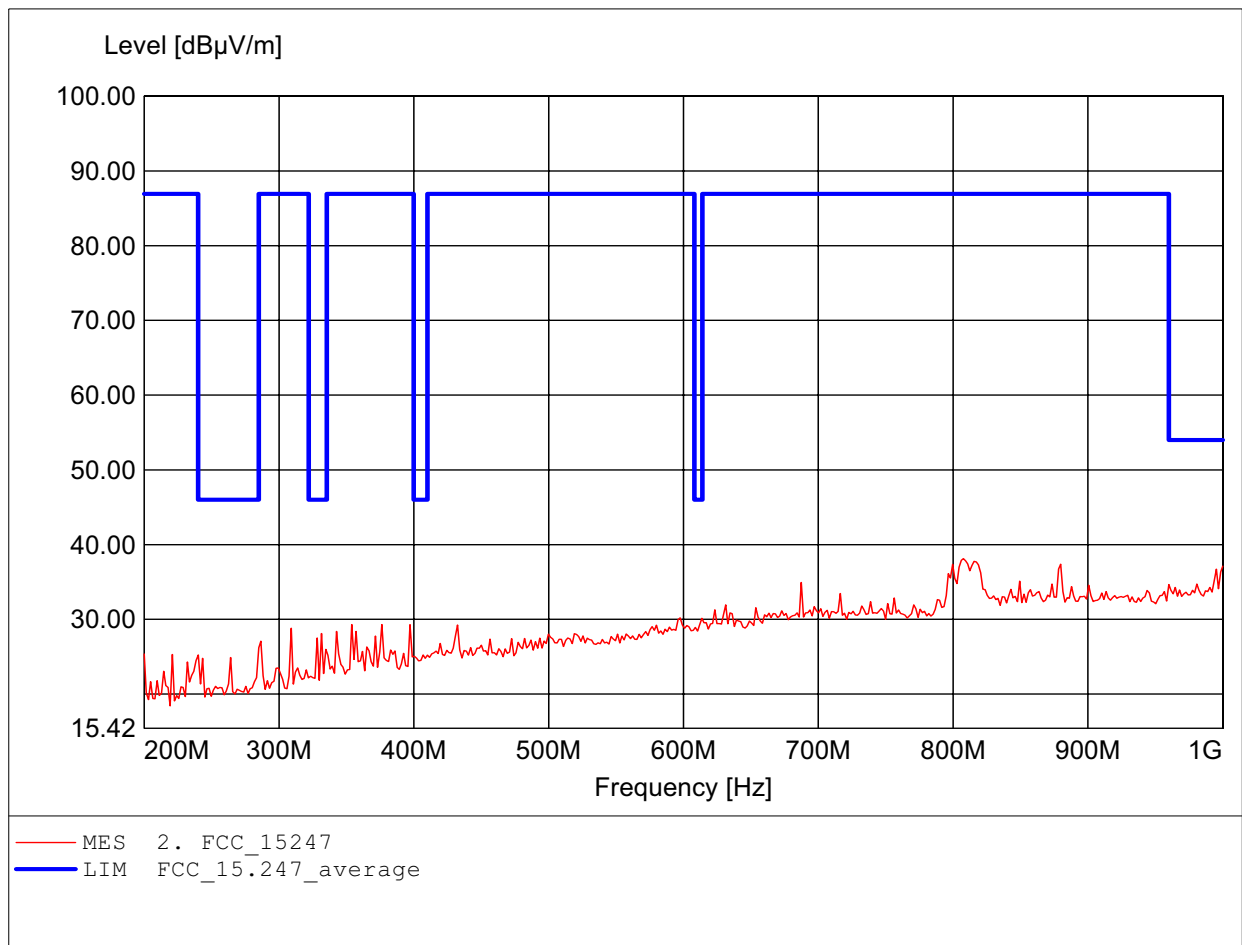

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, amplif.
Freq: 3.248GHz, Emax: 49.77dBμV/m, RBW: 1MHz

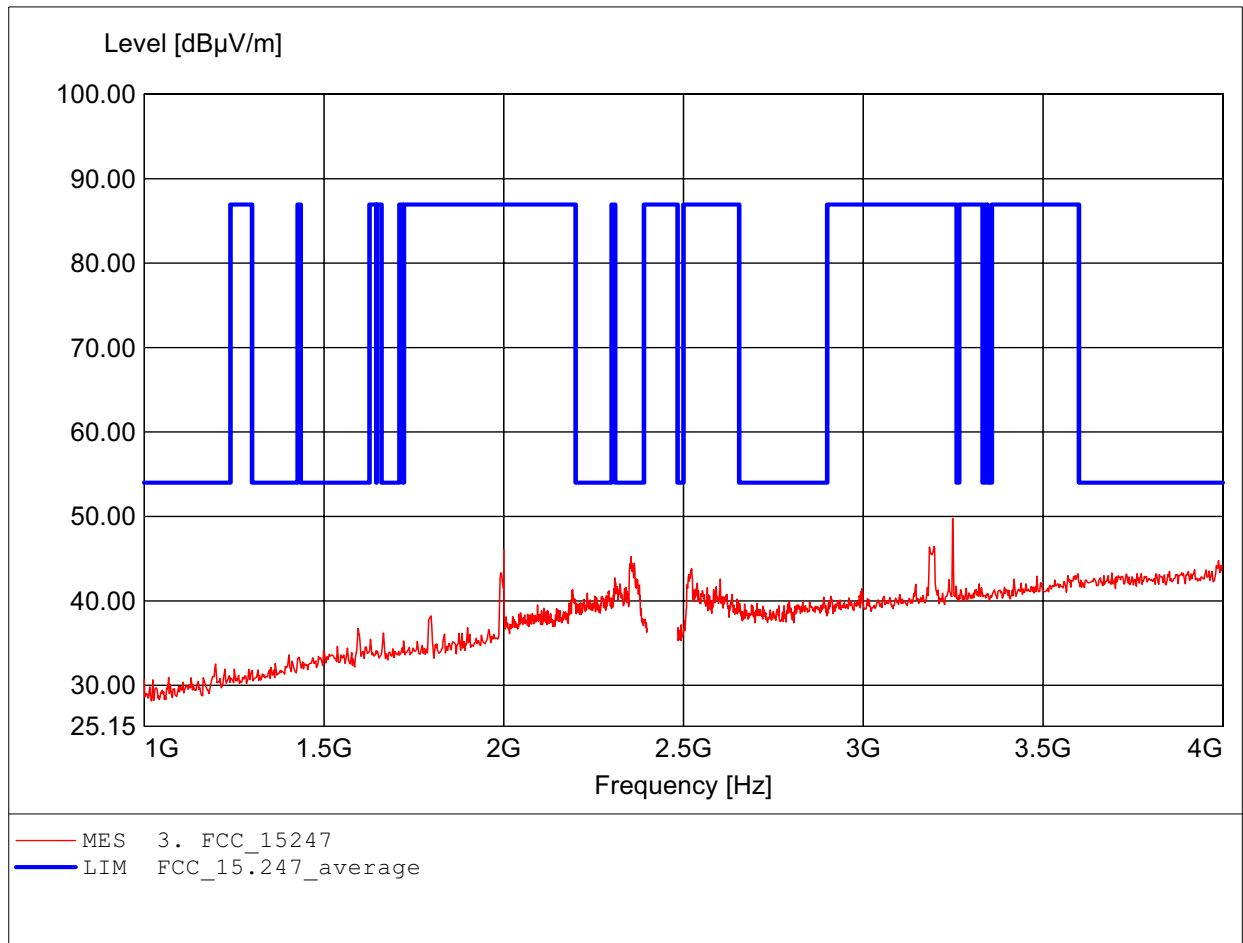

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, amplif.
Freq: 3.248GHz, Emax: 52.76dBμV/m, RBW: 1MHz

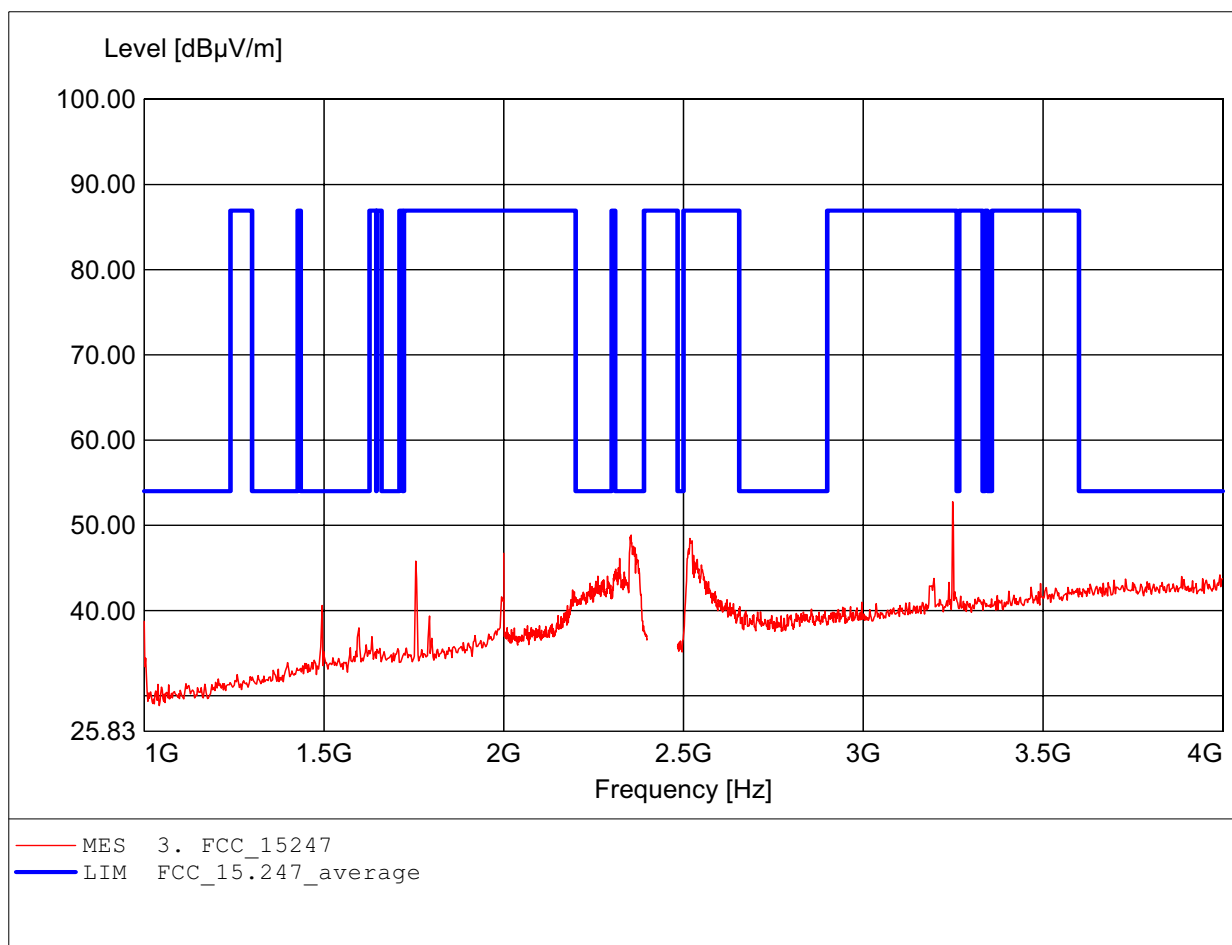

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, ampl.+HP.
Freq: 7.671GHz, Emax: 52.75dBμV/m, RBW: 1MHz

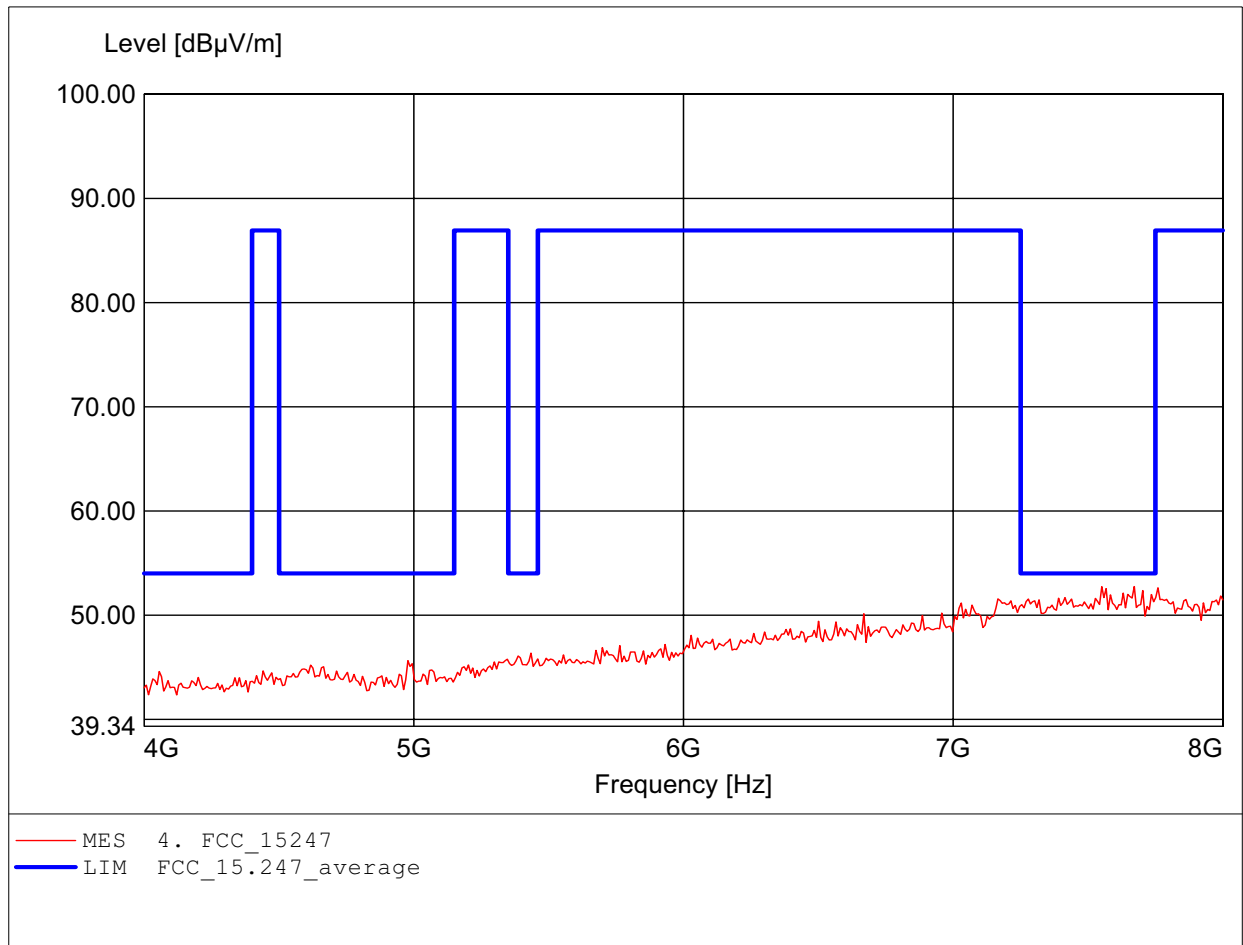

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, ampl.+HP.
Freq: 7.663GHz, Emax: 52.88dBμV/m, RBW: 1MHz

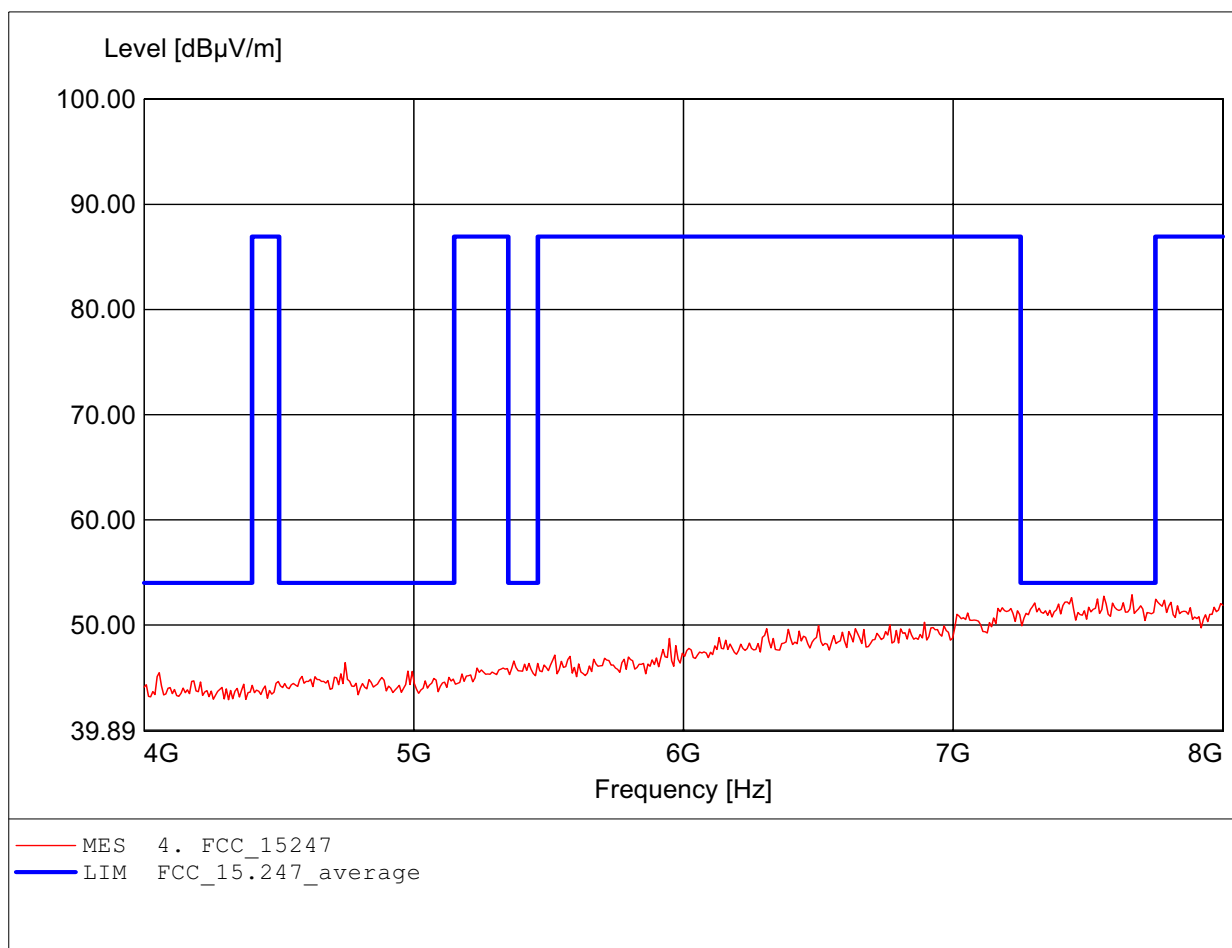

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, ampl.+HP.
Freq: 11.567GHz, Emax: 48.29dBμV/m, RBW: 1MHz

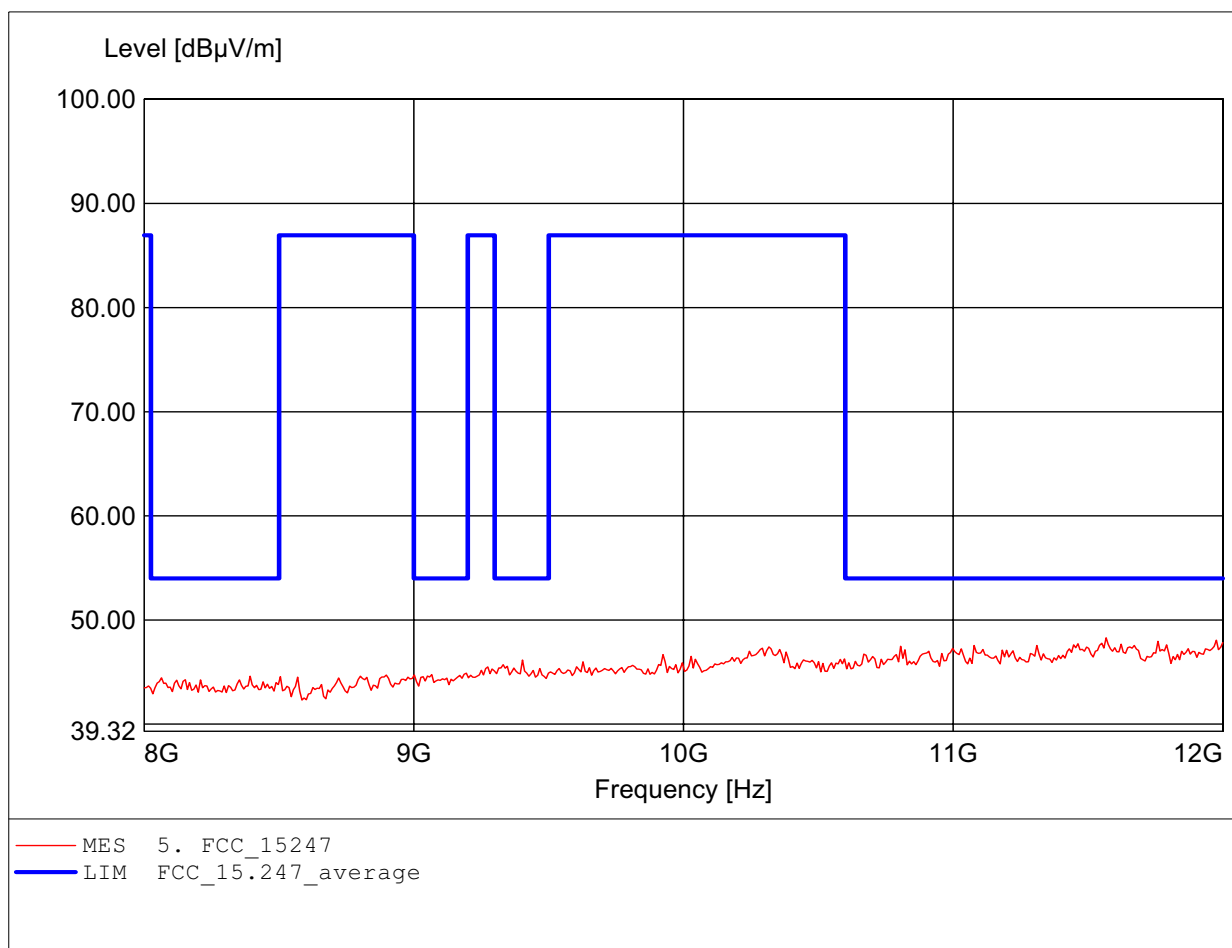

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, ampl.+HP.
Freq: 11.551GHz, Emax: 49.21dBμV/m, RBW: 1MHz

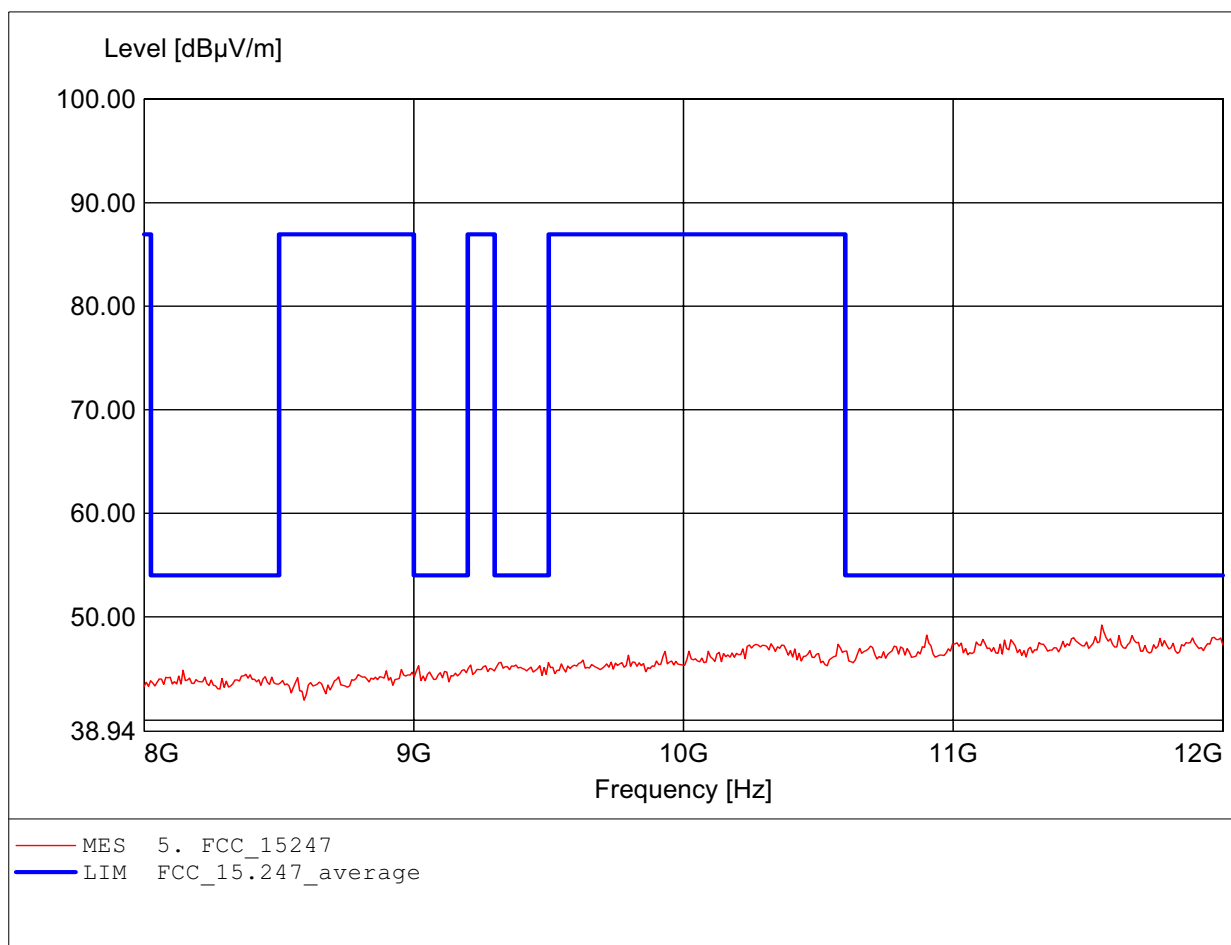

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, ampl.+HP.
Freq: 17.820GHz, Emax: 52.22dBμV/m, RBW: 1MHz

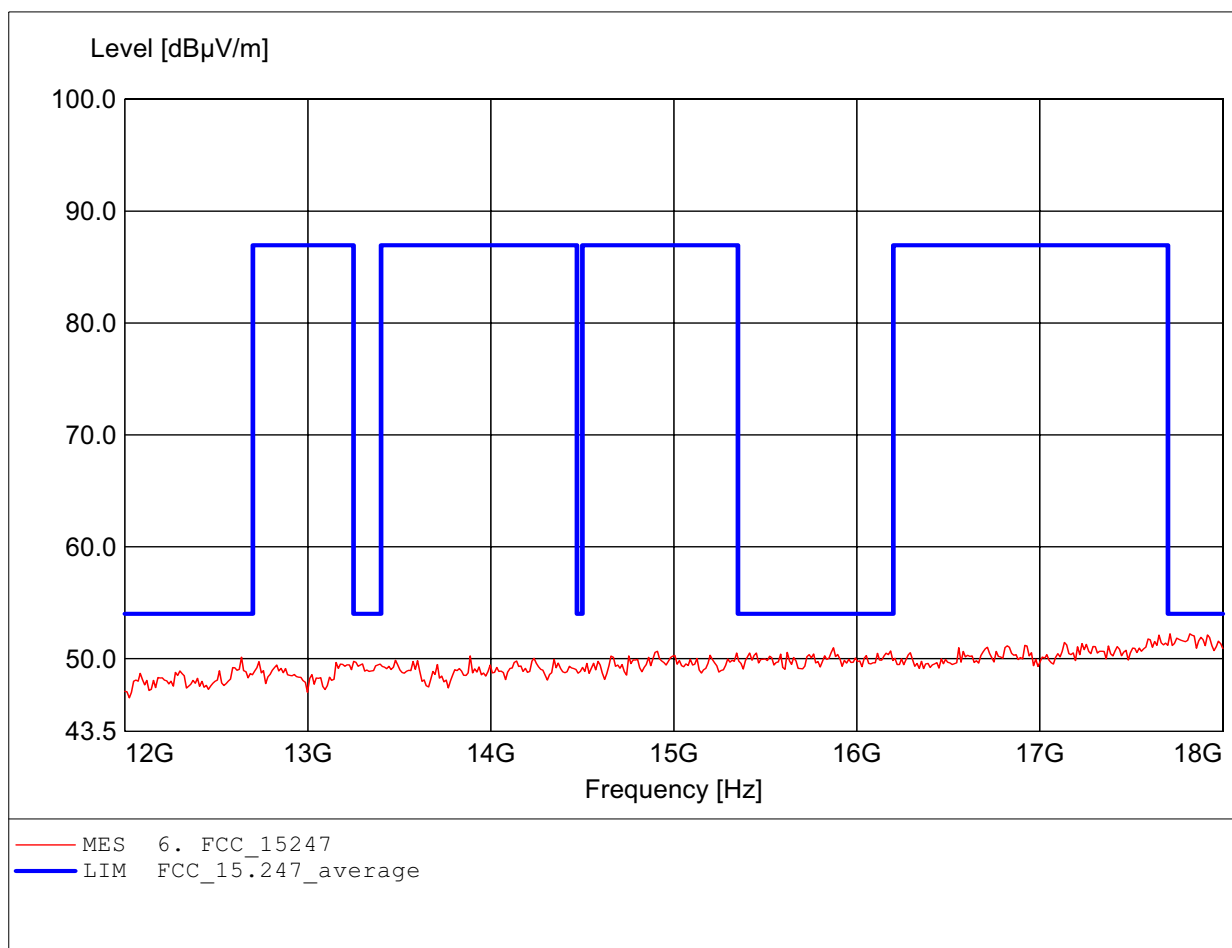

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, ampl.+HP.
Freq: 17.808GHz, Emax: 52.38dBμV/m, RBW: 1MHz

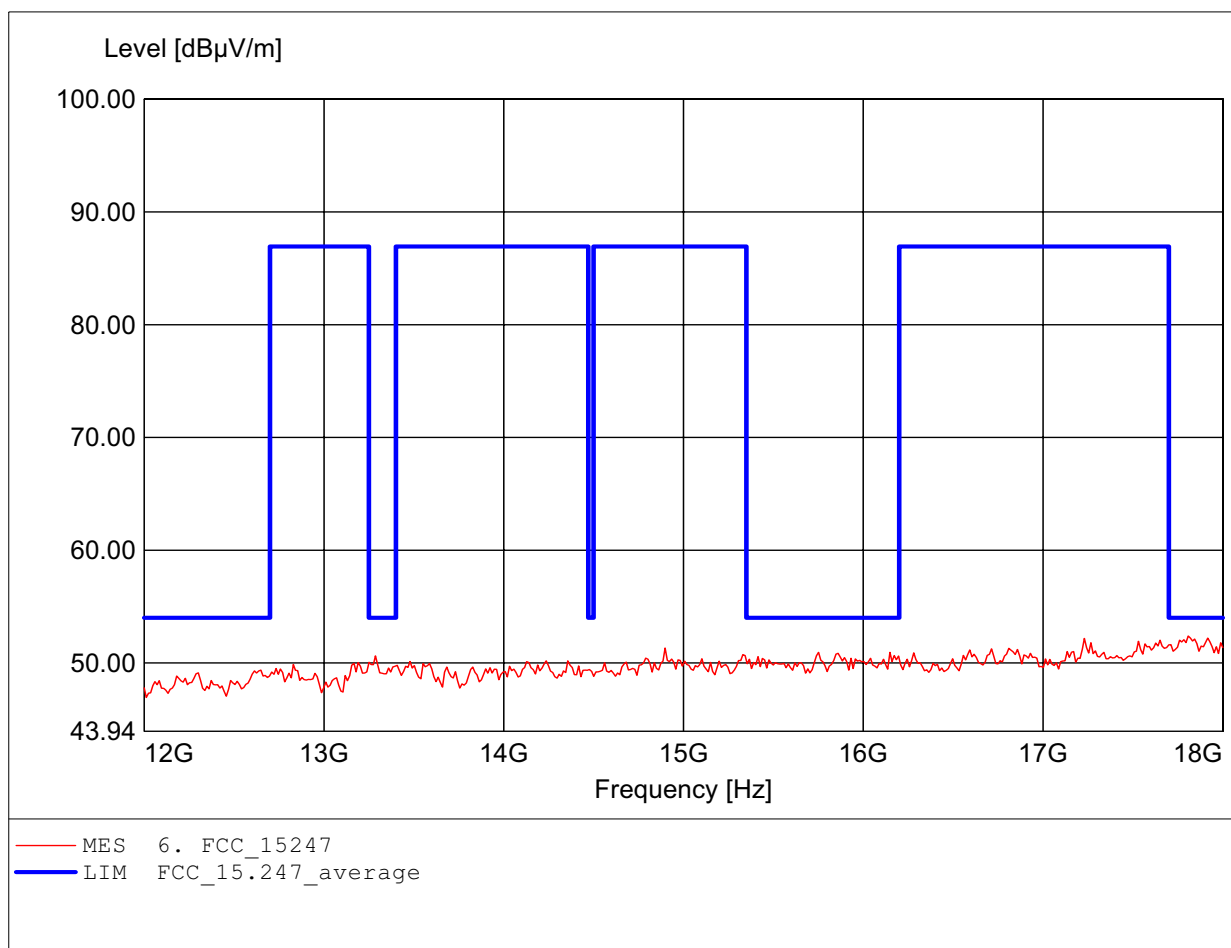

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, amplif.
Freq: 24.728GHz, Emax: 52.17dBμV/m, RBW: 1MHz

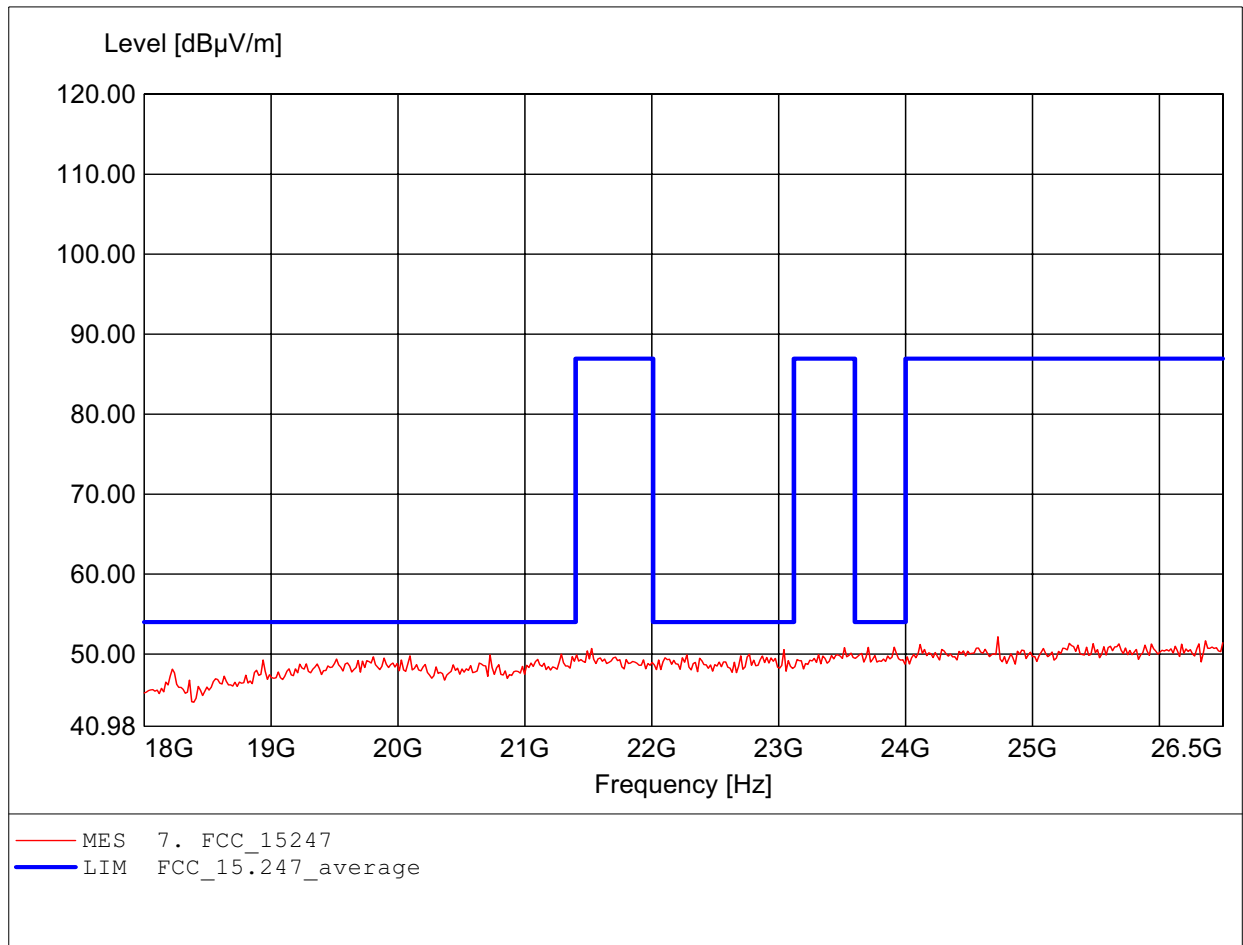

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, amplif.
Freq: 25.768GHz, Emax: 52.34dBμV/m, RBW: 1MHz

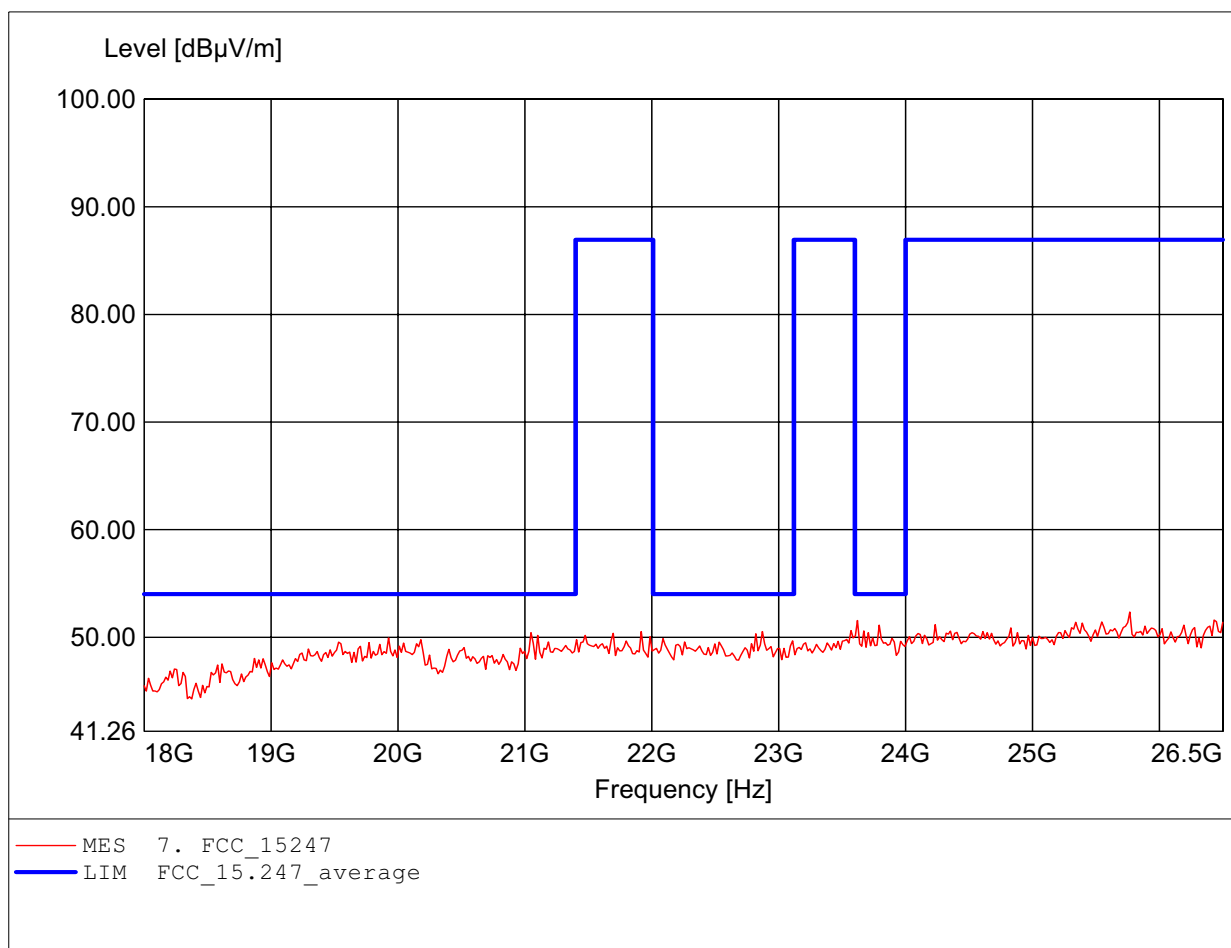

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HK 116
Freq: 36.132MHz, Emax: 32.85dBμV/m, RBW: 100kHz

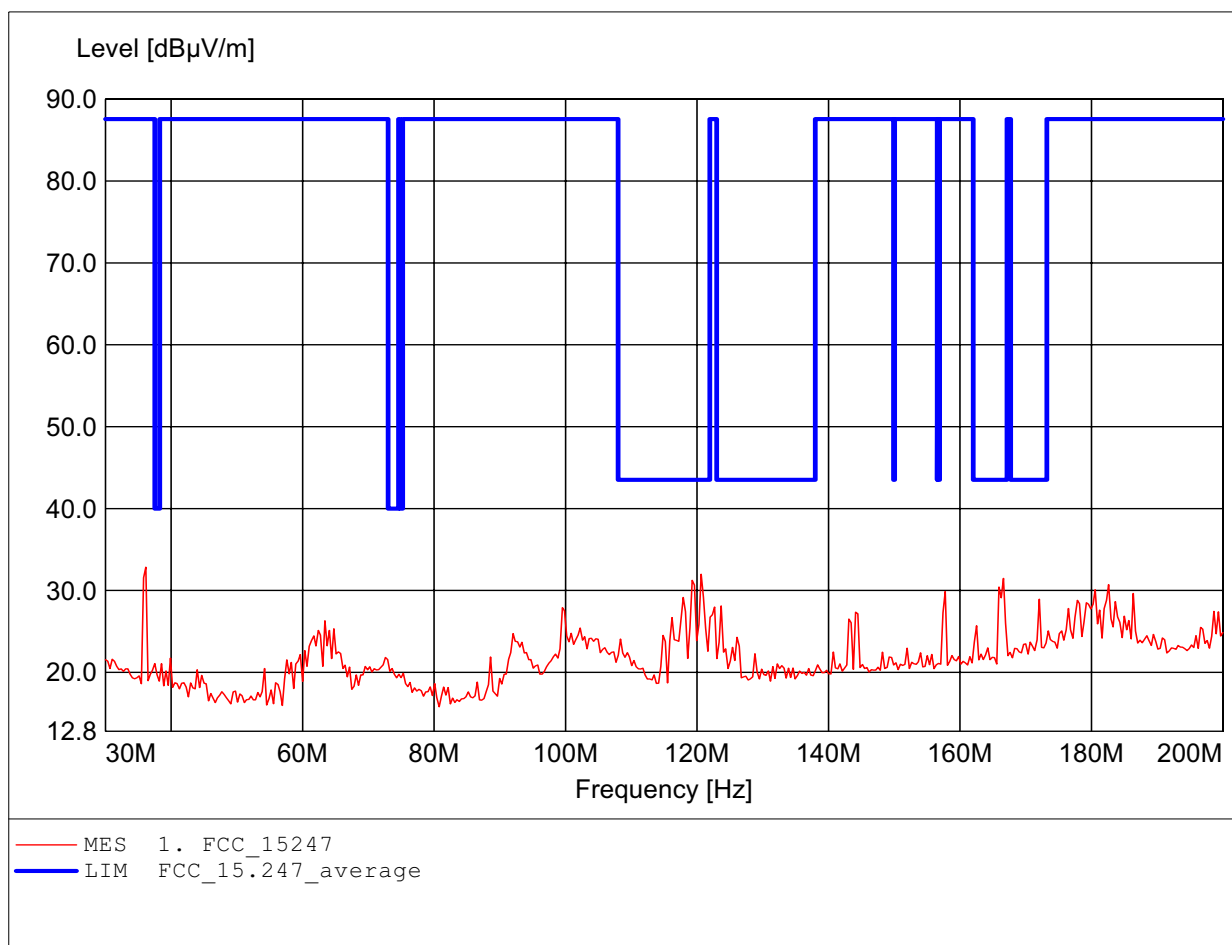

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HK 116
Freq: 35.792MHz, Emax: 35.96dBµV/m, RBW: 100kHz

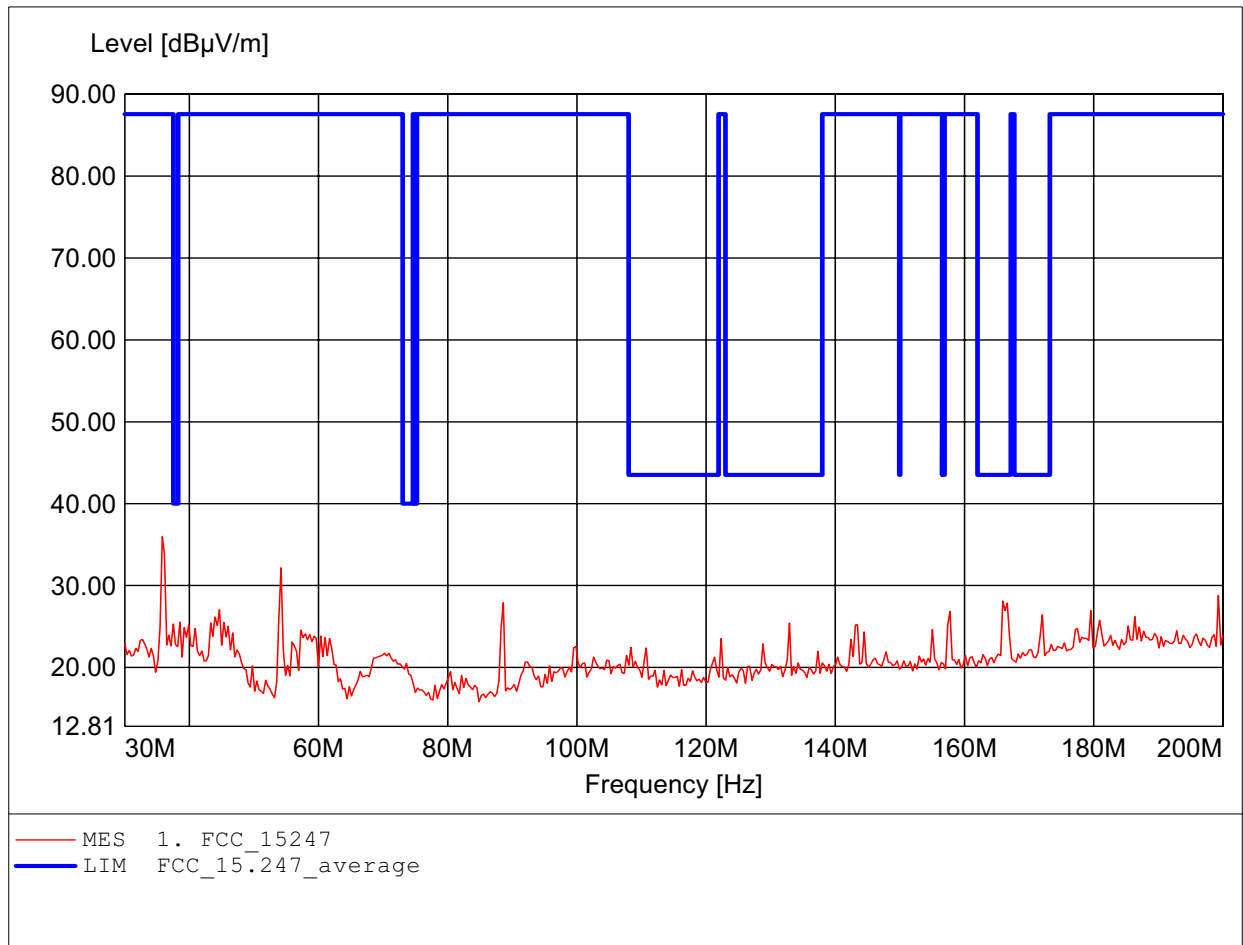

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223,
Freq: 817.234MHz, Emax: 41.48dBµV/m, RBW: 100kHz

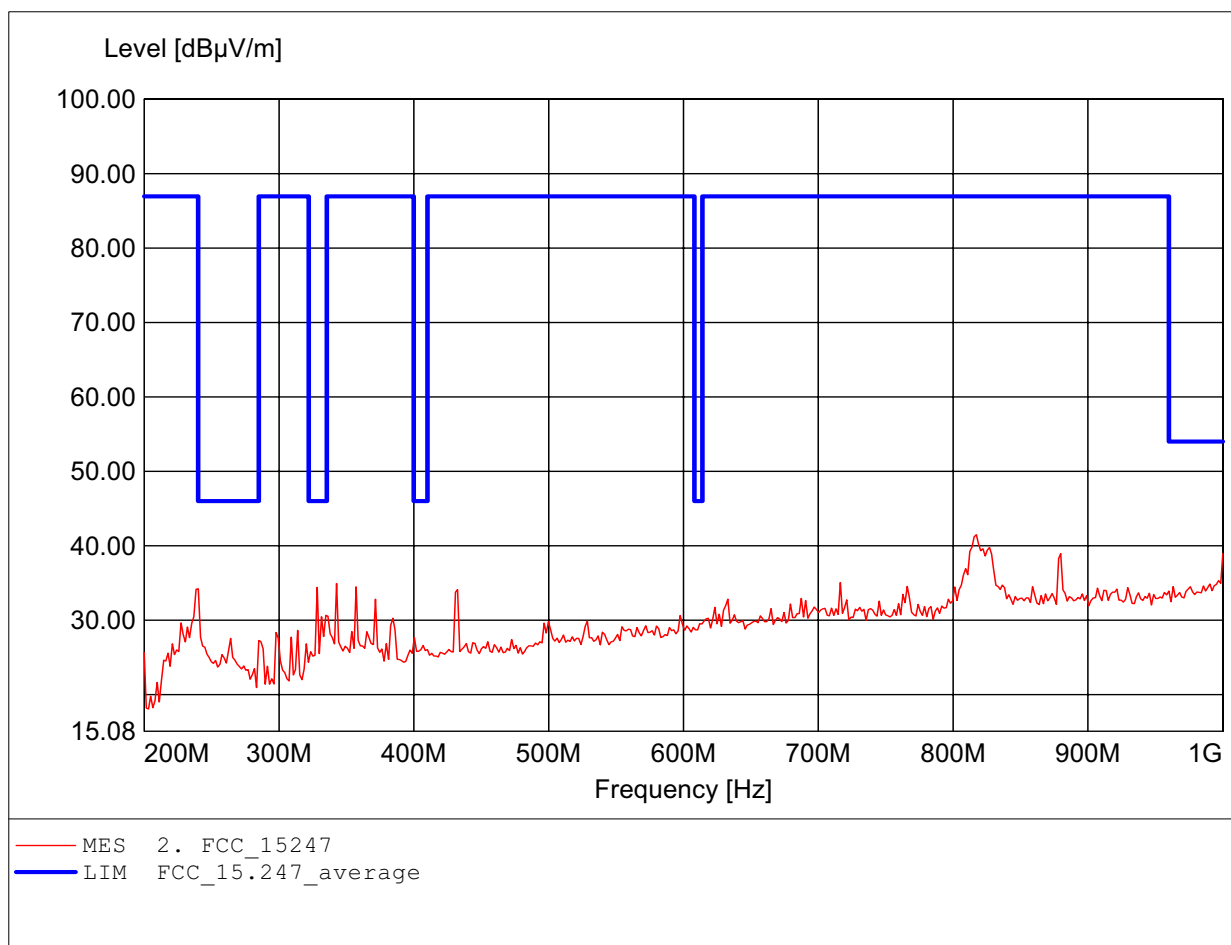

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL 223,
Freq: 815.631MHz, Emax: 38.98dBμV/m, RBW: 100kHz

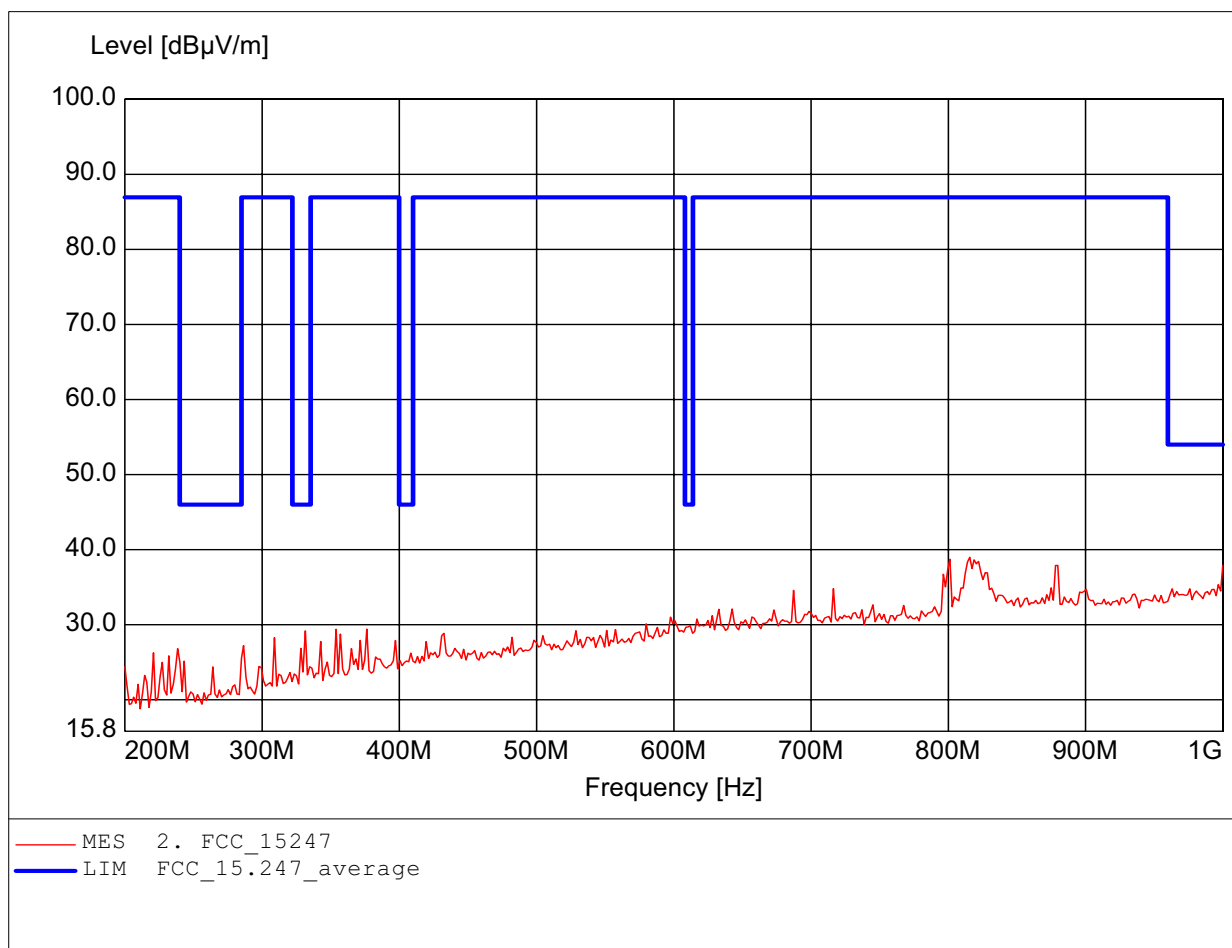

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, amplif.
Freq: 2.000GHz, Emax: 46.47dBμV/m, RBW: 1MHz

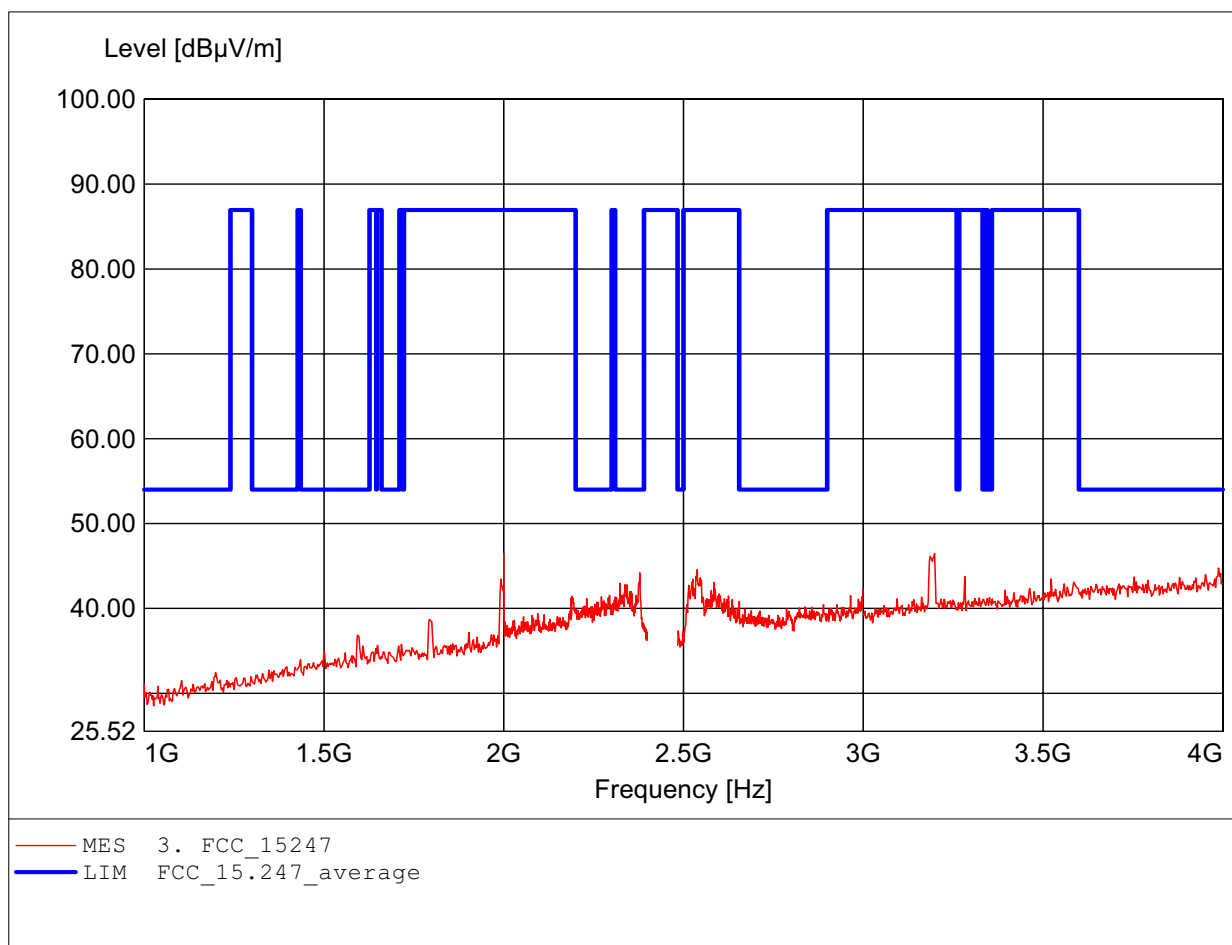

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, amplif.
Freq: 2.536GHz, Emax: 54.65dBμV/m, RBW: 1MHz

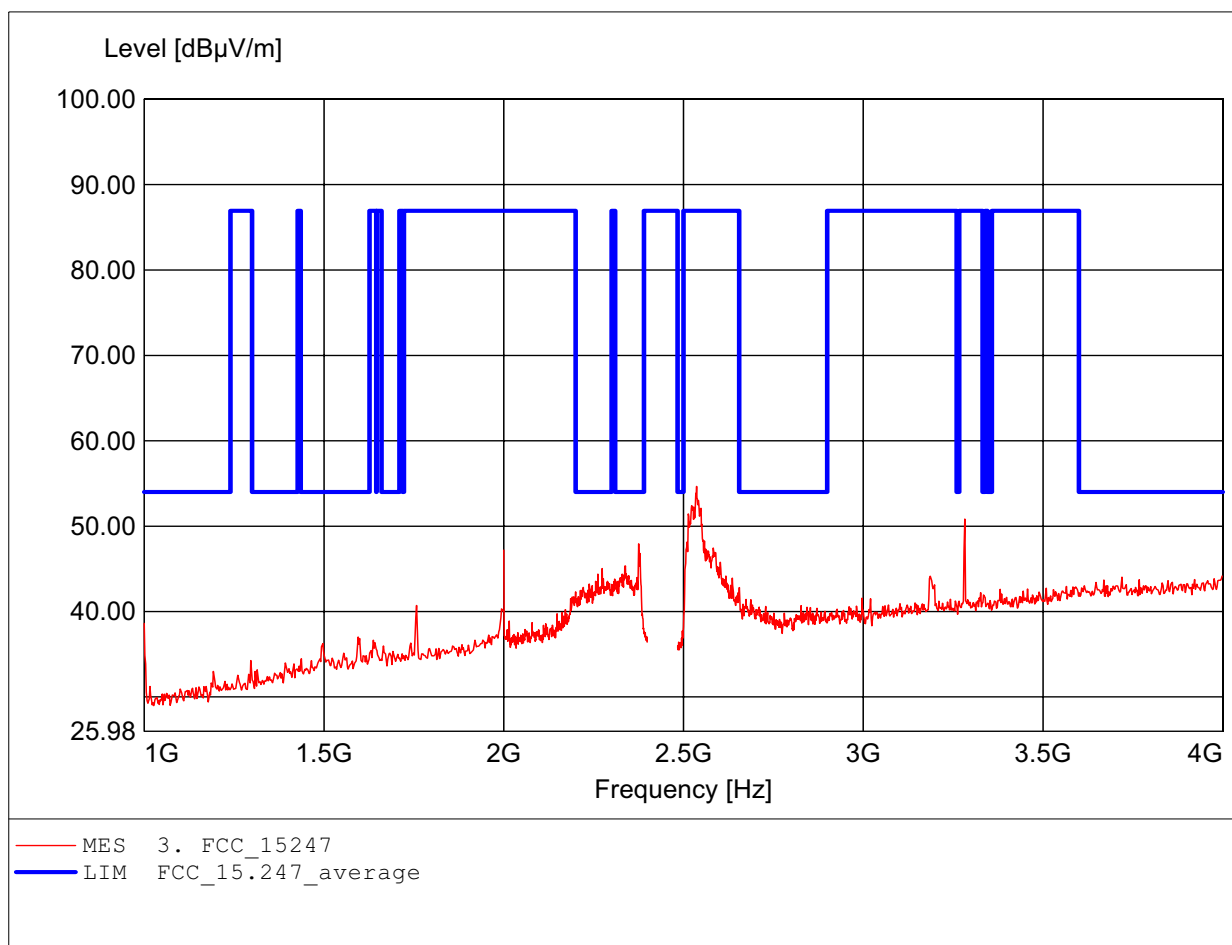

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, ampl.+HP.
Freq: 7.848GHz, Emax: 52.98dBμV/m, RBW: 1MHz

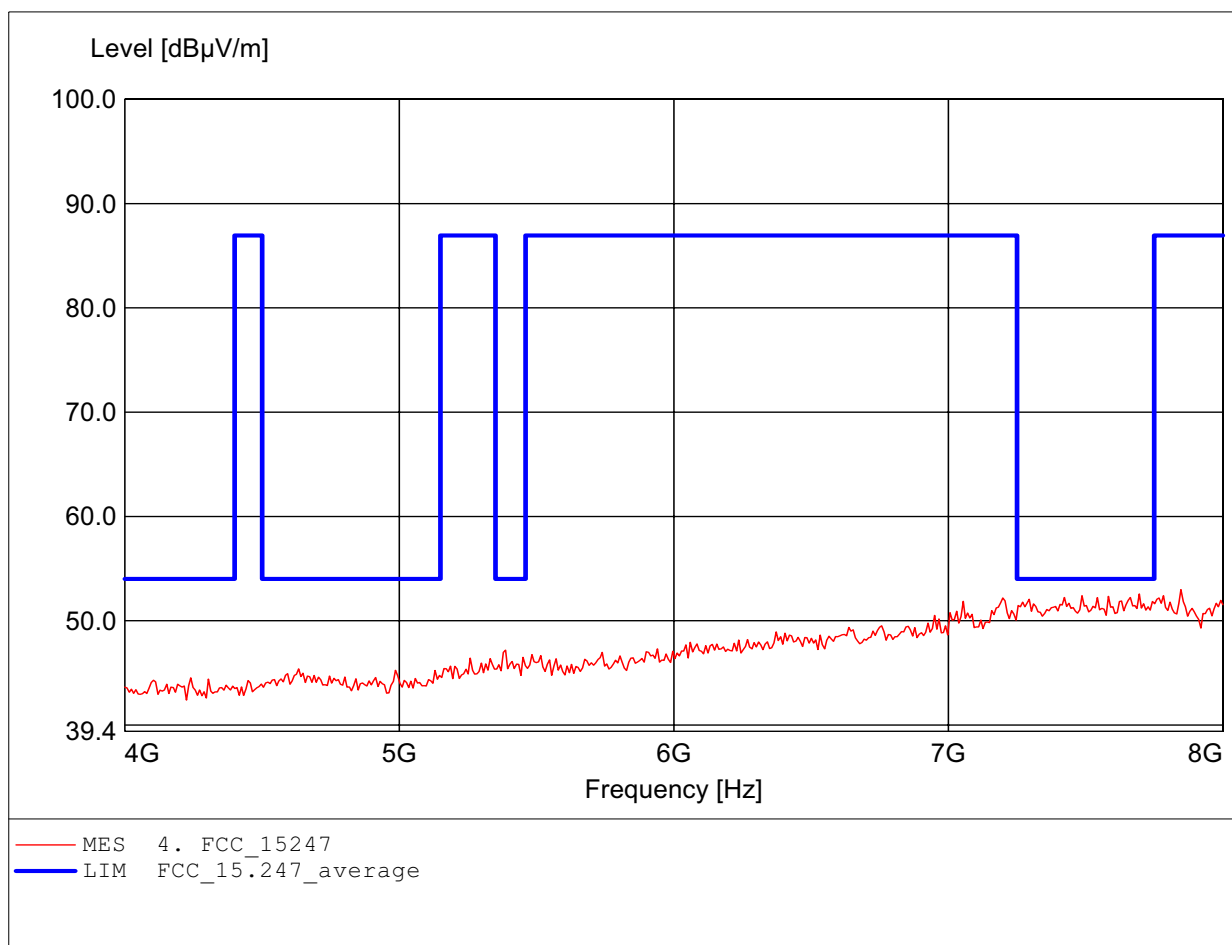

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, ampl.+HP.
Freq: 7.295GHz, Emax: 52.43dBμV/m, RBW: 1MHz

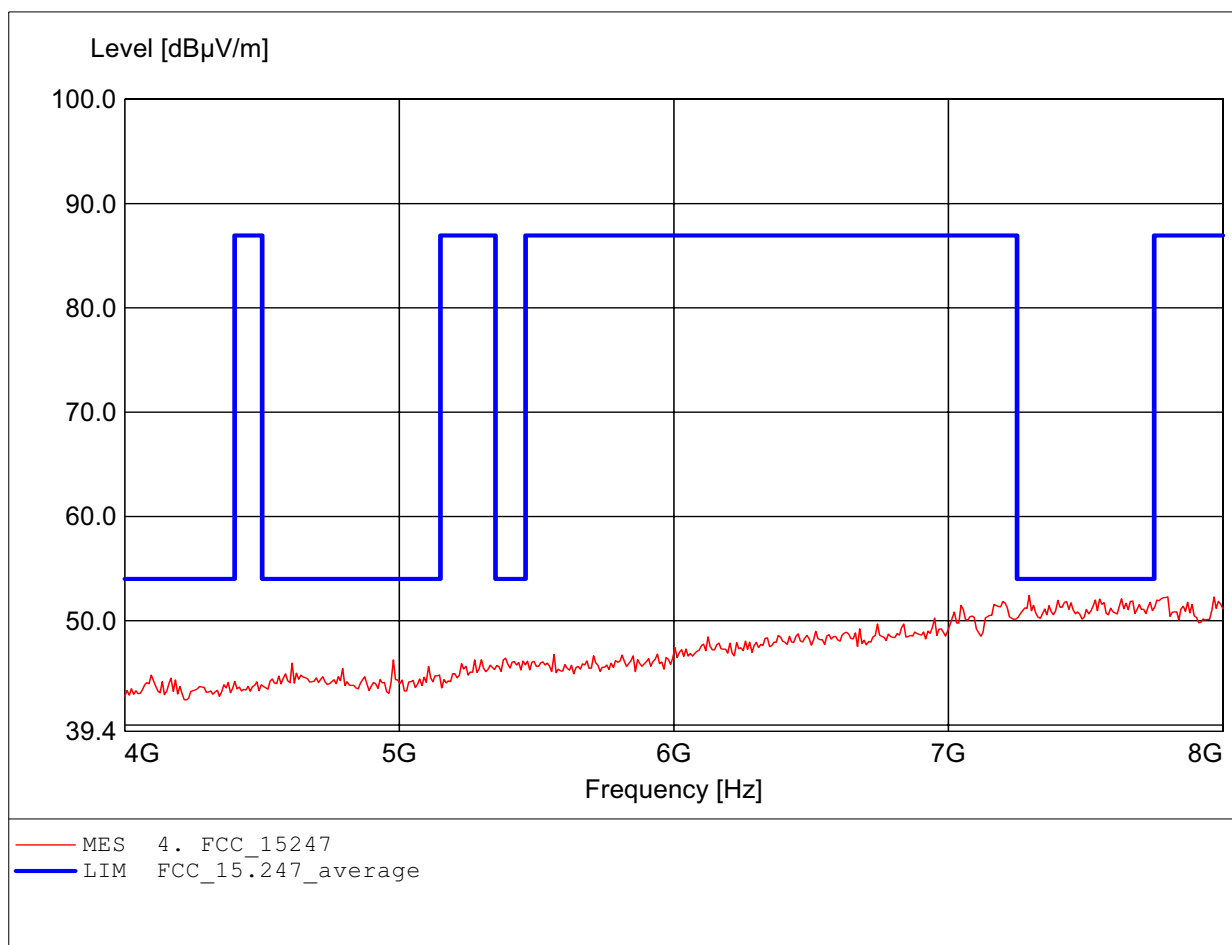

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, ampl.+HP.
Freq: 11.583GHz, Emax: 48.08dBμV/m, RBW: 1MHz

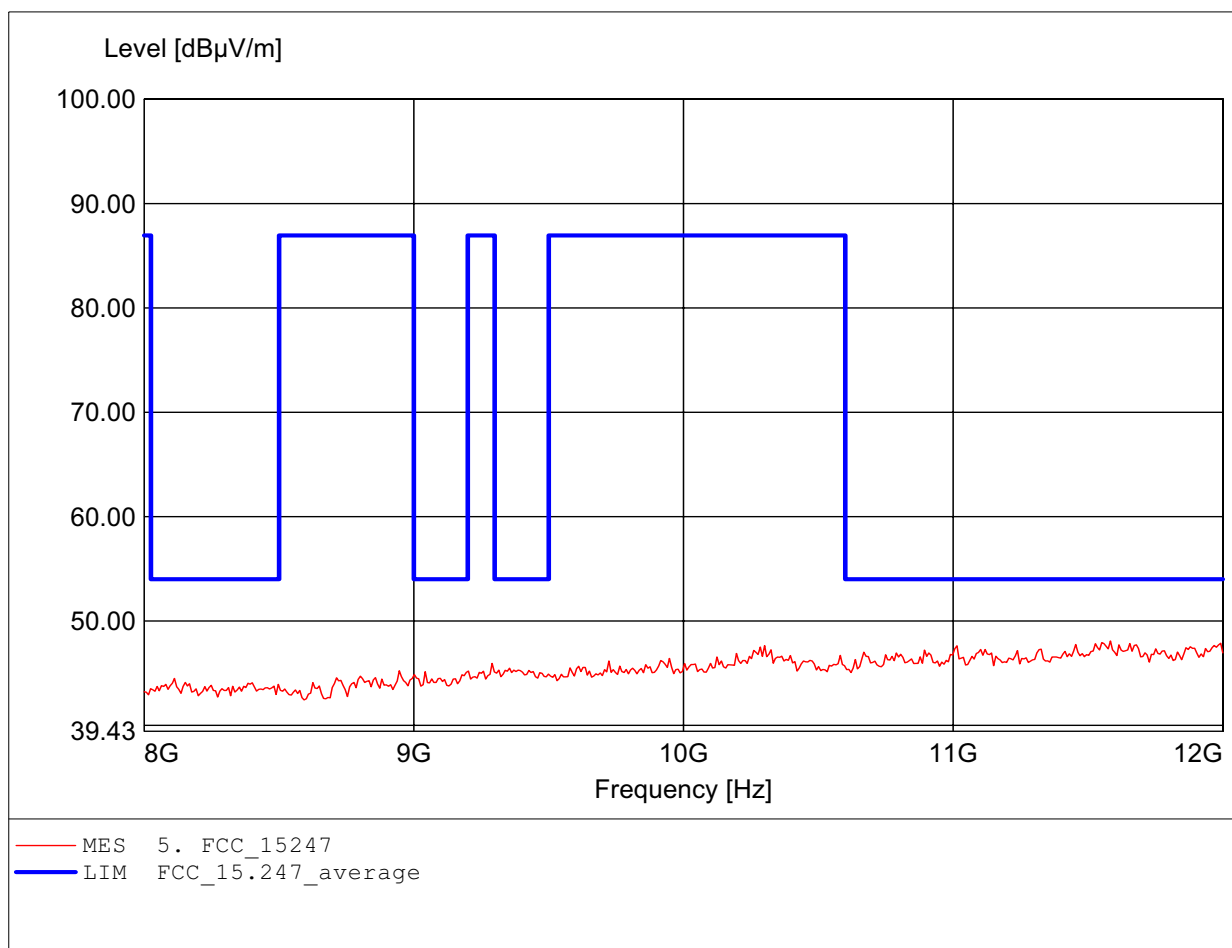

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, ampl.+HP.
Freq: 11.559GHz, Emax: 48.55dBμV/m, RBW: 1MHz

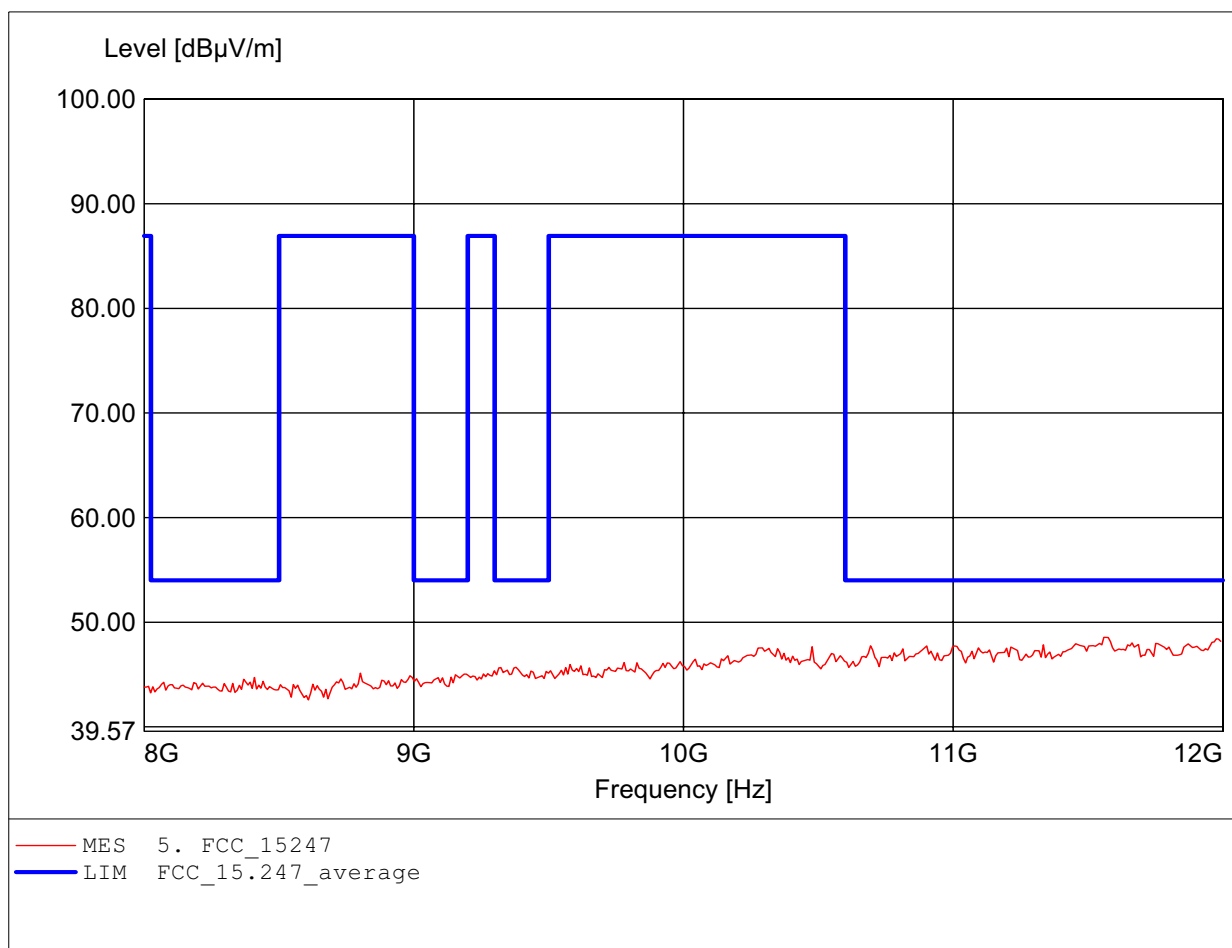

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, ampl.+HP.
Freq: 17.820GHz, Emax: 52.30dBµV/m, RBW: 1MHz

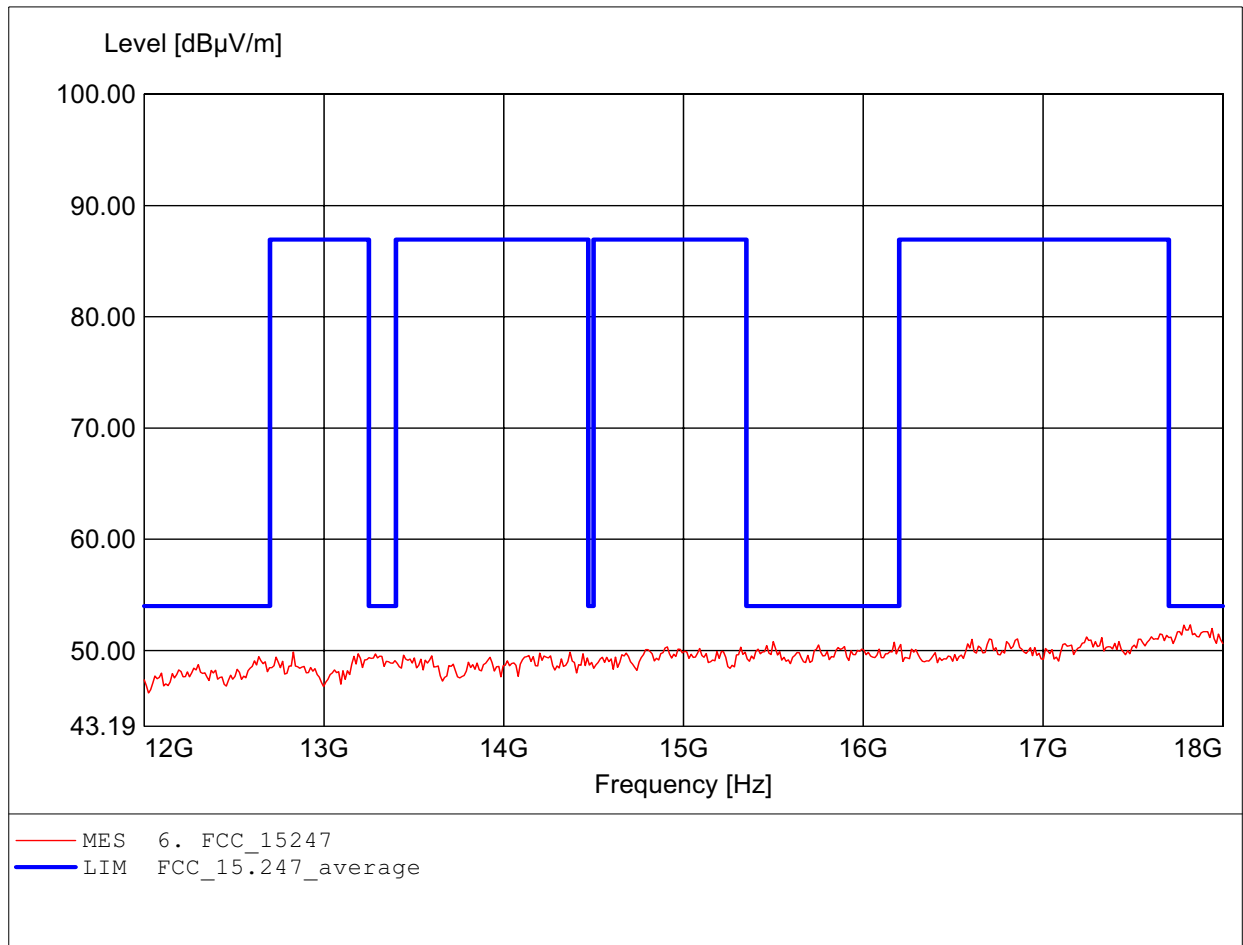

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, ampl.+HP.
Freq: 17.747GHz, Emax: 52.88dBμV/m, RBW: 1MHz

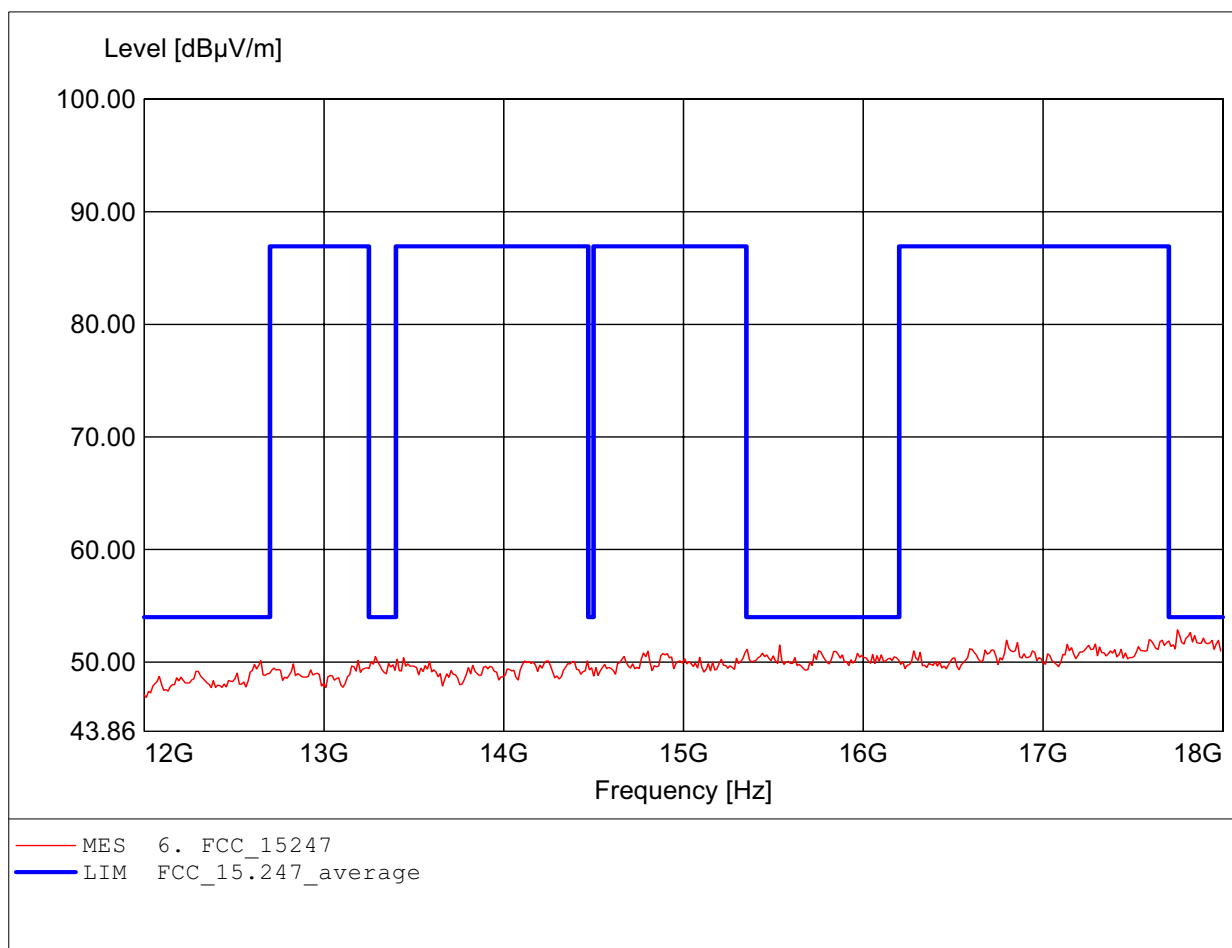

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, amplif.
Freq: 24.626GHz, Emax: 52.25dBμV/m, RBW: 1MHz

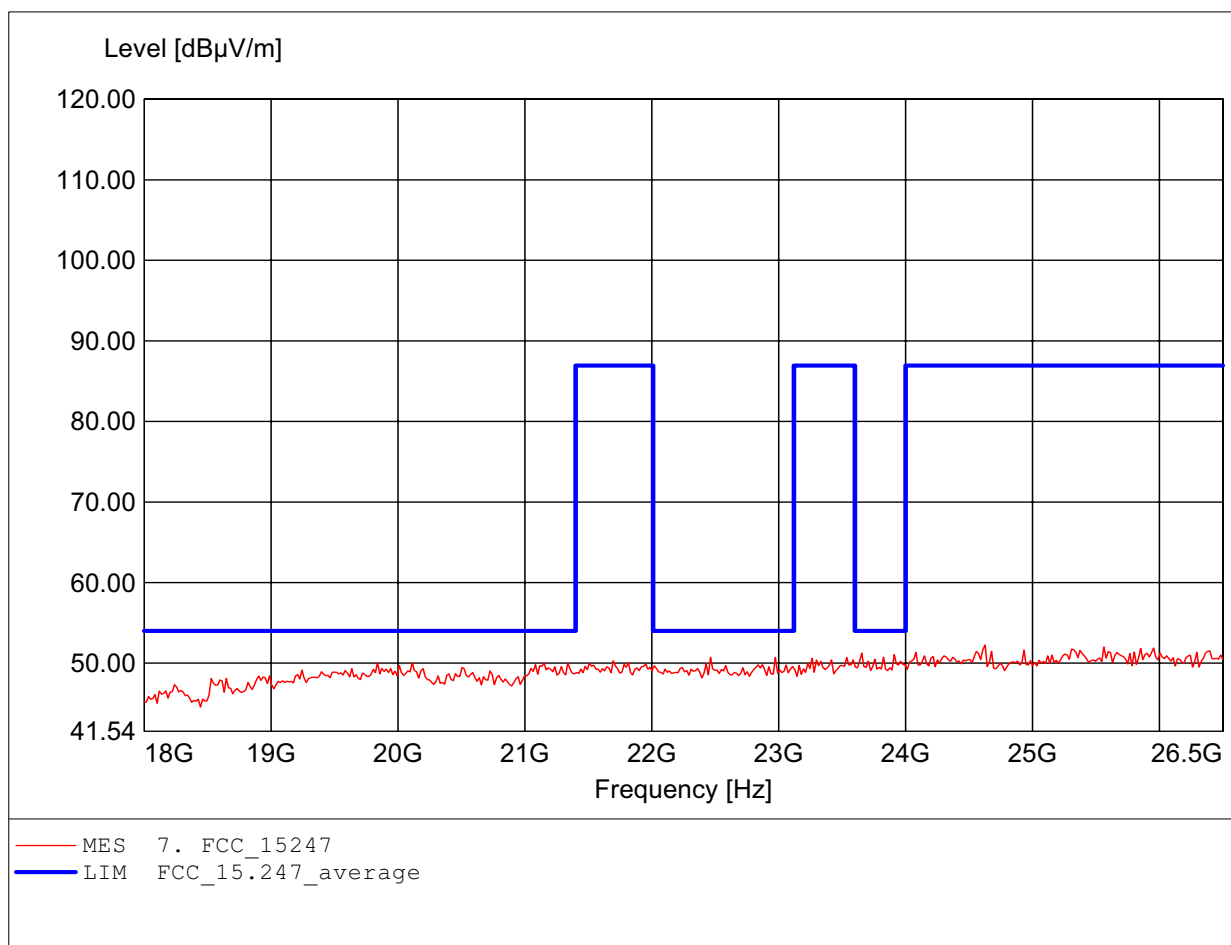

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP 0002


Order Number: W6M20704-7982 802.11g ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL025, amplif.
Freq: 25.631GHz, Emax: 51.96dBμV/m, RBW: 1MHz

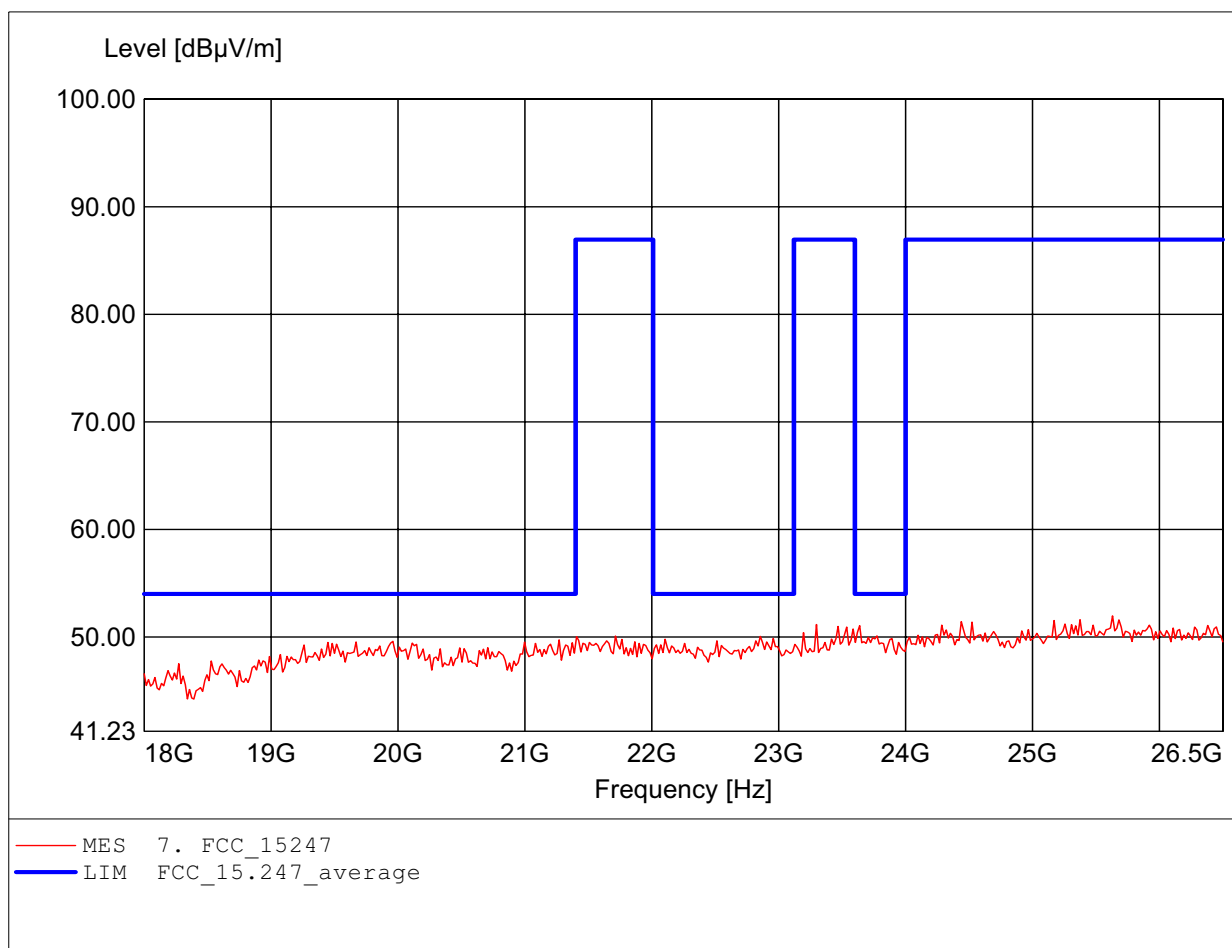



Ref 30 dBm *Att 30 dB *RBW 100 kHz Delta 1 [T1] 39.89 dB
*VBW 100 kHz *SWT 200 ms 12.692307692 MHz

1 PK
MAXH

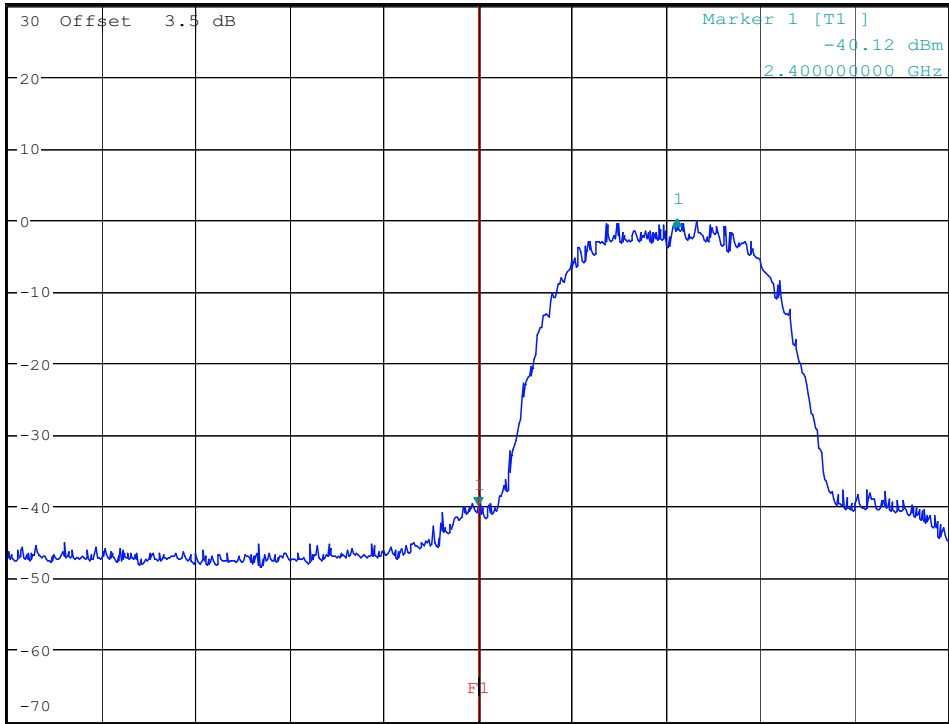


Center 2.4 GHz 6 MHz/ Span 60 MHz

Bandedge 802.11b 2412MHz

Date: 16.APR.2007 10:22:08



Ref 30 dBm *Att 30 dB *RBW 100 kHz Delta 1 [T1] 47.61 dB
*VBW 100 kHz *SWT 200 ms -20.865384615 MHz

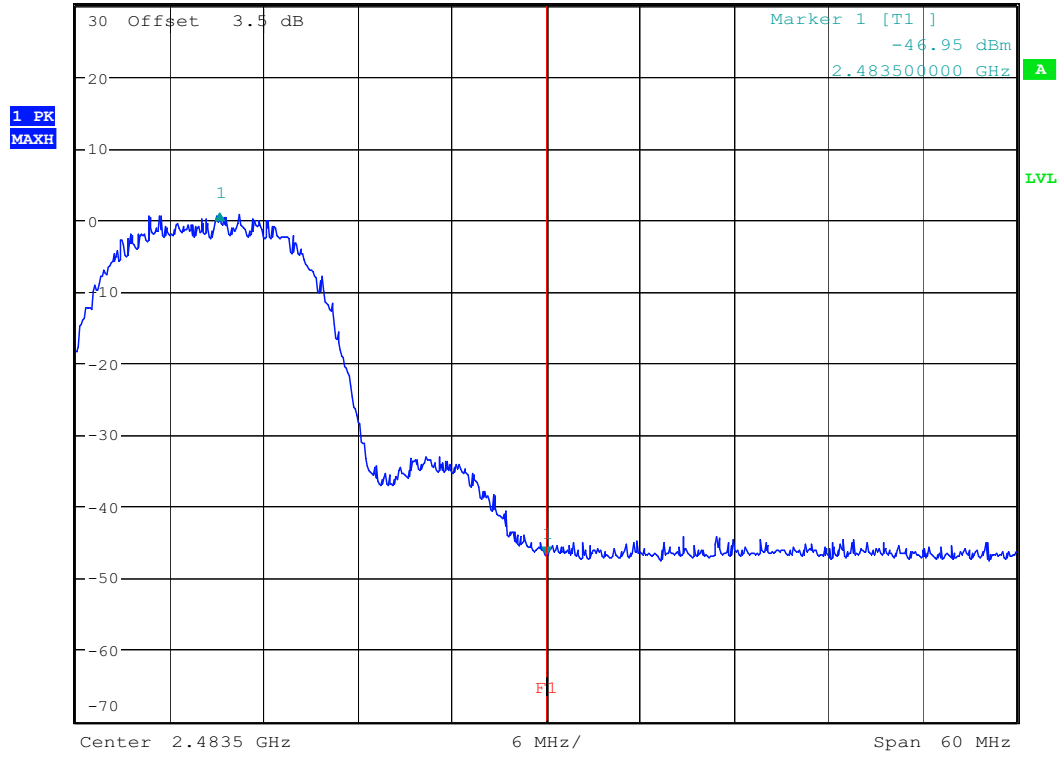


Bandedge 802.11b 2462MHz
Date: 16.APR.2007 10:21:20



Ref 30 dBm *Att 30 dB *RBW 100 kHz Delta 1 [T1] 38.15 dB
*VBW 100 kHz *SWT 200 ms 16.346153846 MHz

1 PK
MAXH

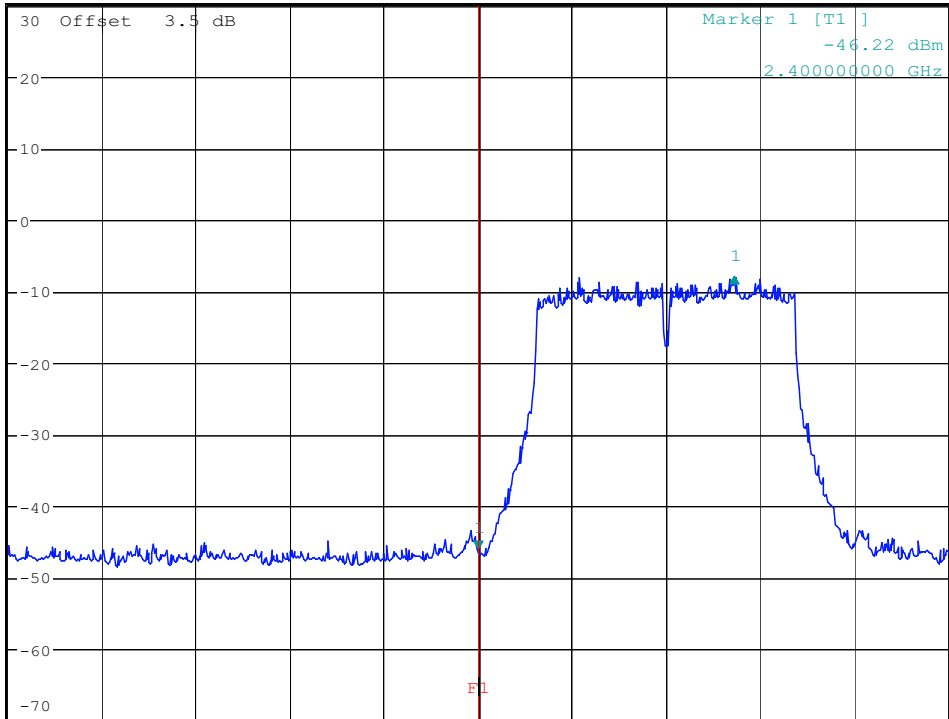


Center 2.4 GHz 6 MHz/ Span 60 MHz

Bandedge 802.11g 2412MHz

Date: 16.APR.2007 10:22:35



Ref 30 dBm *Att 30 dB *RBW 100 kHz Delta 1 [T1] 38.97 dB
*VBW 100 kHz *SWT 200 ms -27.115384615 MHz

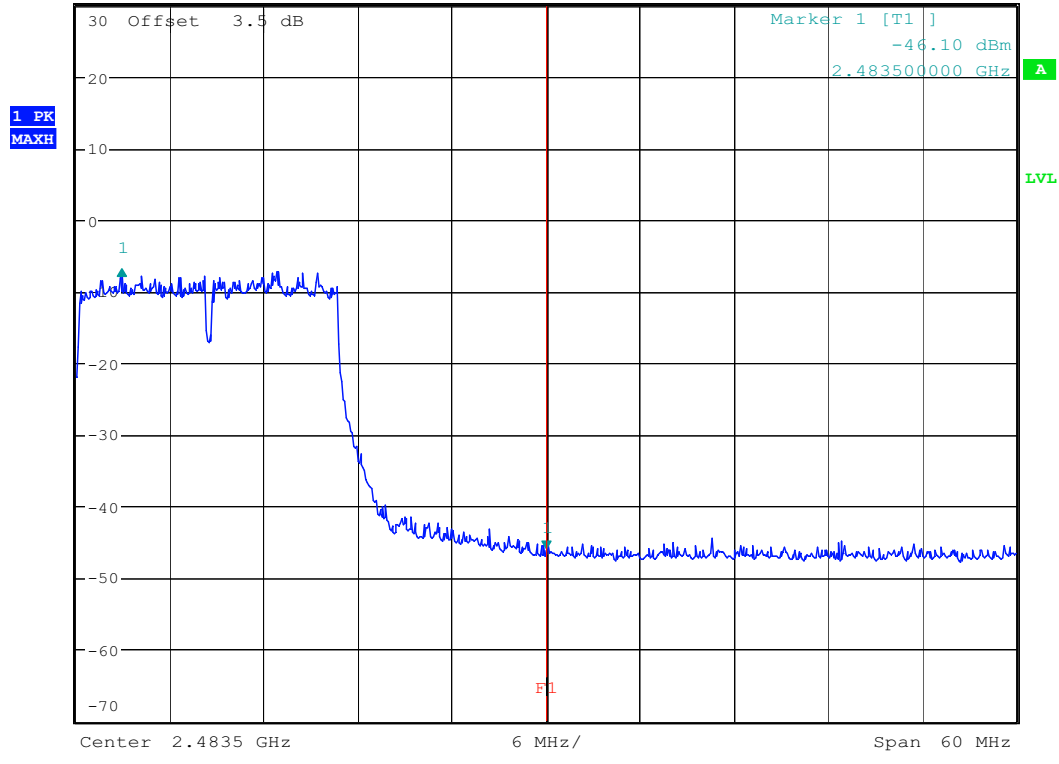

Bandedge 802.11g 2462MHz
Date: 16.APR.2007 10:20:01




*RBW 100 kHz Marker 1 [T1]
*VBW 100 kHz -0.38 dBm
*SWT 200 ms 2.412673077 GHz

Ref 30 dBm

*Att 30 dB

1 PK
MAXH

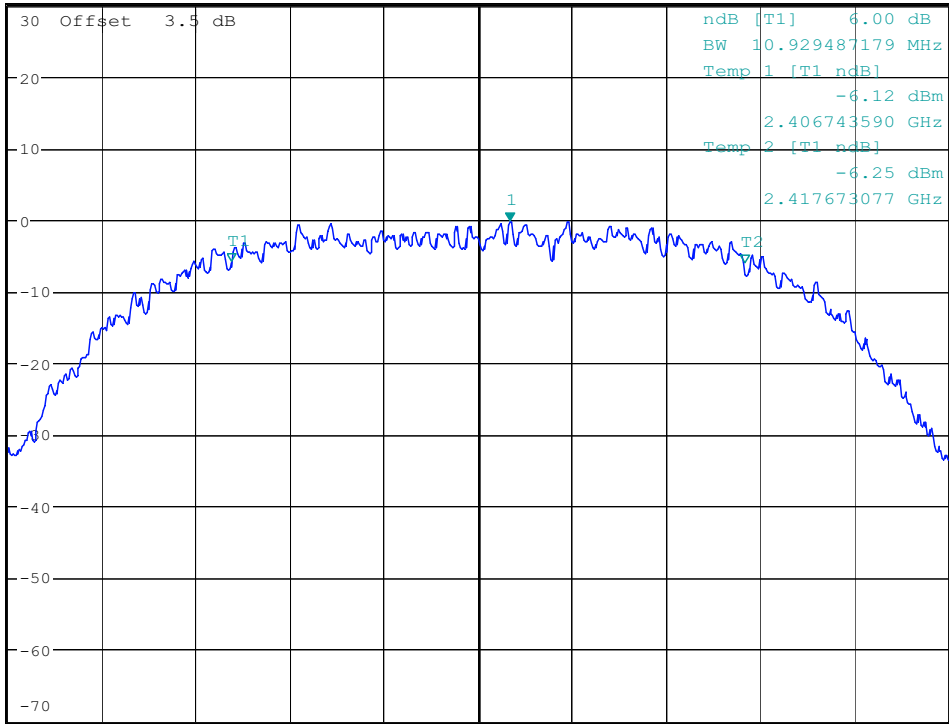

Center 2.412 GHz

2 MHz/

Span 20 MHz

6dB Bandwidth 802.11b 2412MHz


Date: 16.APR.2007 10:33:44



*RBW 100 kHz Marker 1 [T1]
*VBW 100 kHz 0.07 dBm
*SWT 200 ms 2.438923077 GHz

Ref 30 dBm

*Att 30 dB

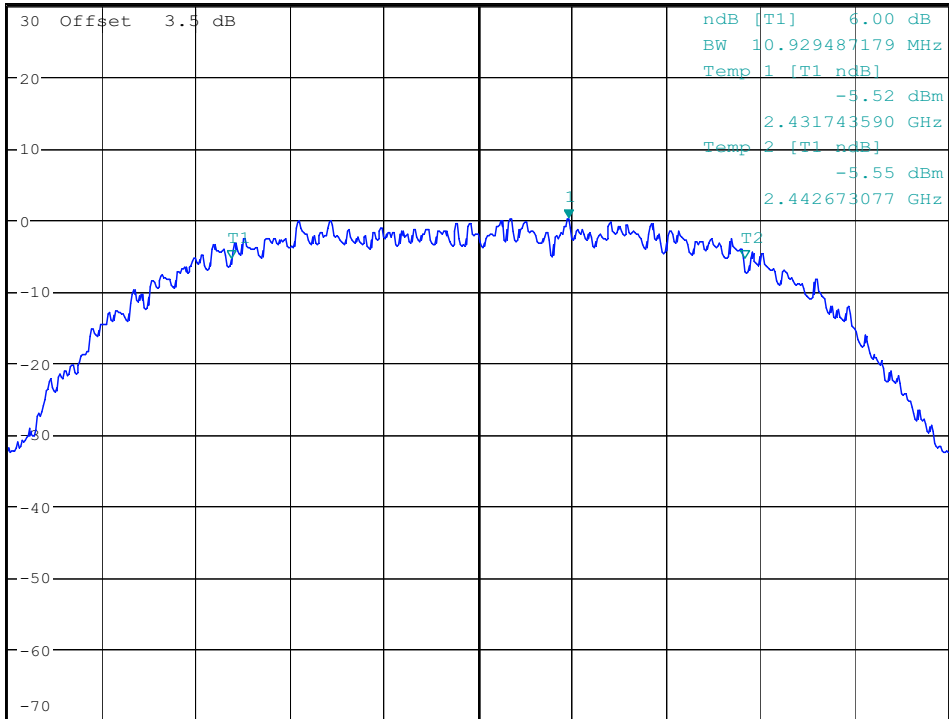

1 PK
MAXH

A

LVL

Center 2.437 GHz 2 MHz/ Span 20 MHz

6dB Bandwidth 802.11b 2437MHz

Date: 16.APR.2007 10:33:19




*RBW 100 kHz Marker 1 [T1]
*VBW 100 kHz 0.52 dBm
*SWT 200 ms 2.462673077 GHz

Ref 30 dBm

*Att 30 dB

1 PK
MAXH

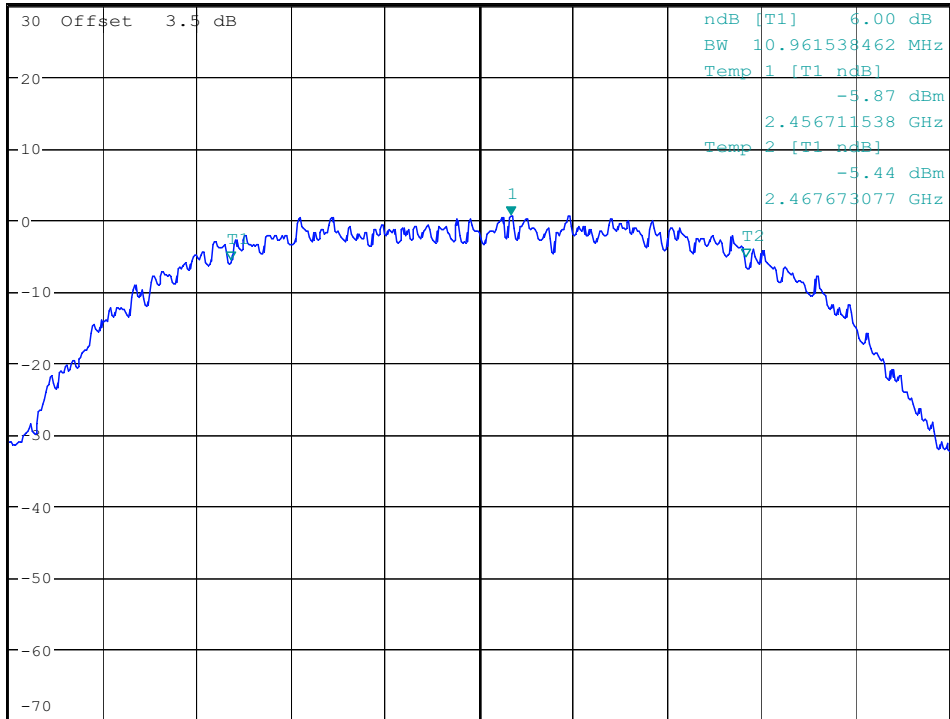

A
LVL

Center 2.462 GHz 2 MHz/ Span 20 MHz

6dB Bandwidth 802.11b 2462MHz


Date: 16.APR.2007 10:32:59



*RBW 100 kHz Delta 1 [T1]
*VBW 100 kHz -0.72 dB
*SWT 200 ms 16.602564103 MHz

Ref 30 dBm

*Att 30 dB

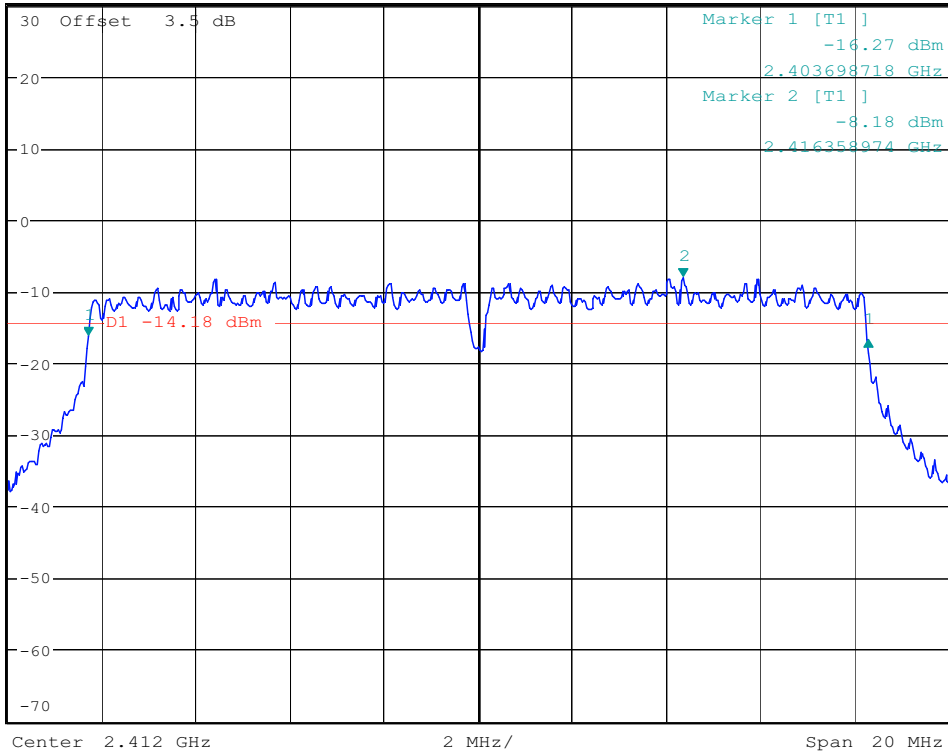

6dB Bandwidth 802.11g 2412MHz


Date: 16.APR.2007 10:29:32



*RBW 100 kHz Delta 1 [T1]
*VBW 100 kHz -0.35 dB
*SWT 200 ms 16.602564103 MHz

Ref 30 dBm

*Att 30 dB

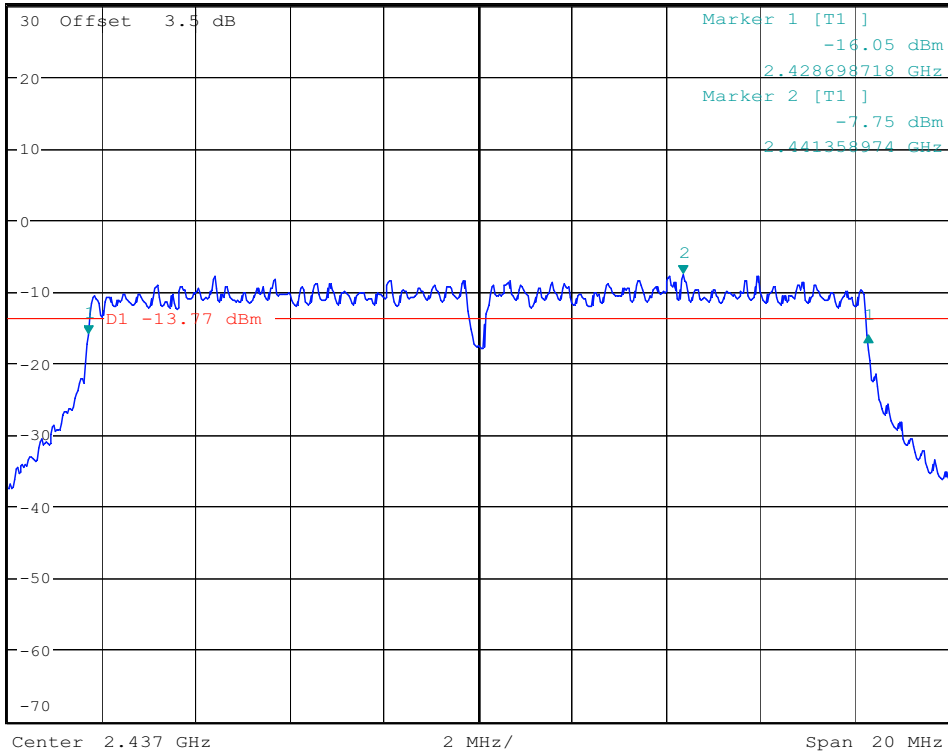

6dB Bandwidth 802.11g 2437MHz

Date: 16.APR.2007 10:30:53




*RBW 100 kHz Delta 1 [T1] -0.65 dB
*VBW 100 kHz
*SWT 200 ms 16.602564103 MHz

Ref 30 dBm

*Att 30 dB

1 PK
MAXH

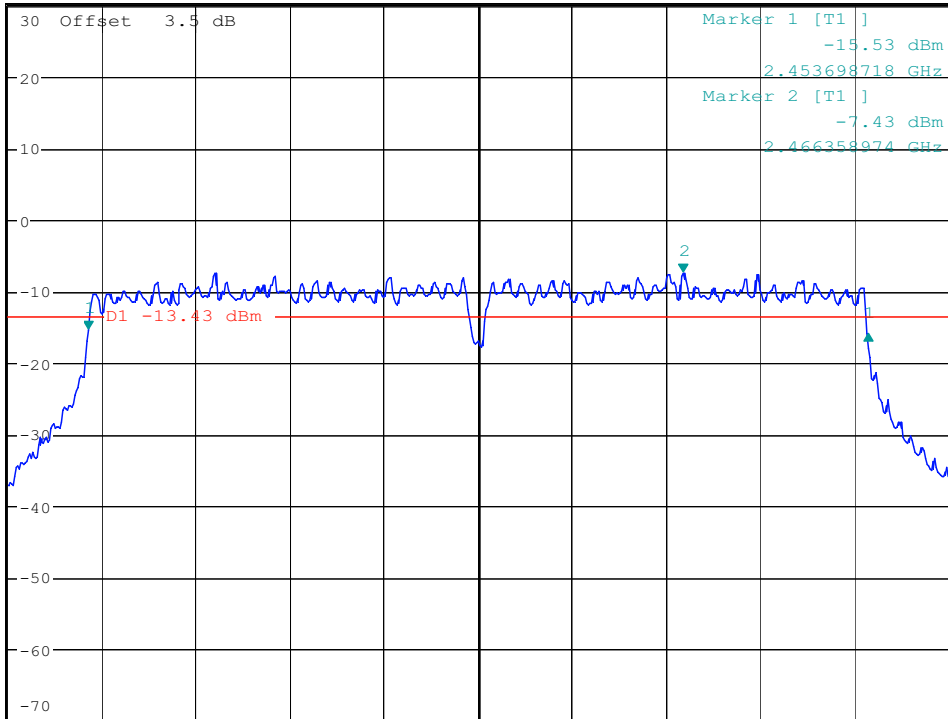

Center 2.462 GHz

2 MHz/

Span 20 MHz

6dB Bandwidth 802.11g 2462MHz


Date: 16.APR.2007 10:32:05



*RBW 3 kHz Marker 1 [T1]
*VBW 100 kHz -15.51 dBm
*SWT 5 s 2.412266827 GHz

Ref 30 dBm *Att 30 dB

1 PK
MAXH

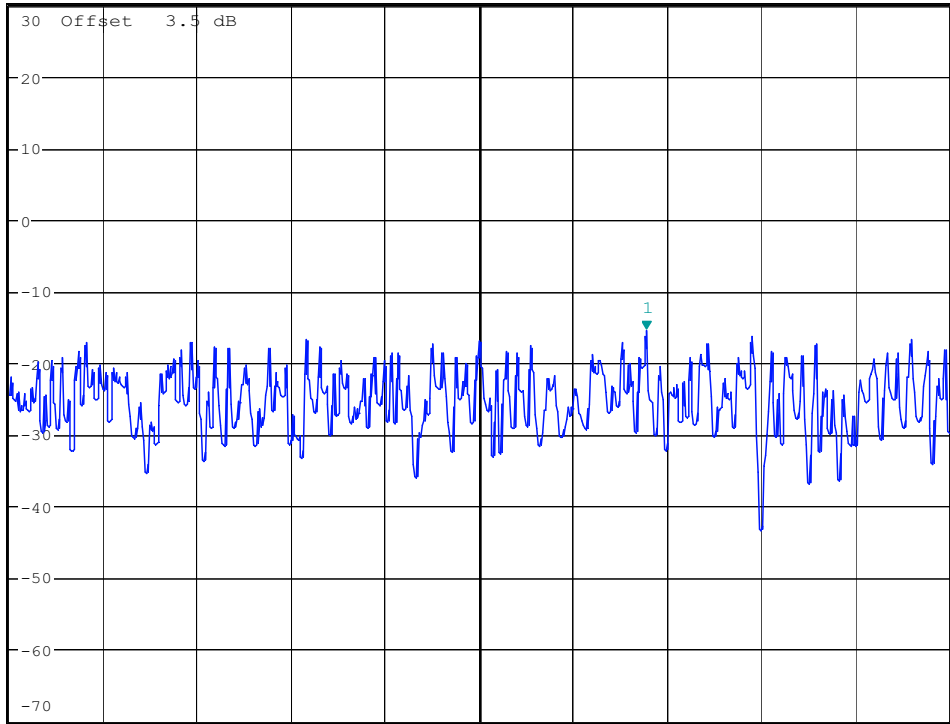

Center 2.412 GHz 150 kHz/ Span 1.5 MHz

Power Density 802.11b 2412MHz


Date: 16.APR.2007 10:10:40



*RBW 3 kHz Marker 1 [T1]
*VBW 100 kHz -13.98 dBm
*SWT 5 s 2.437266827 GHz

Ref 30 dBm *Att 30 dB

1 PK
MAXH

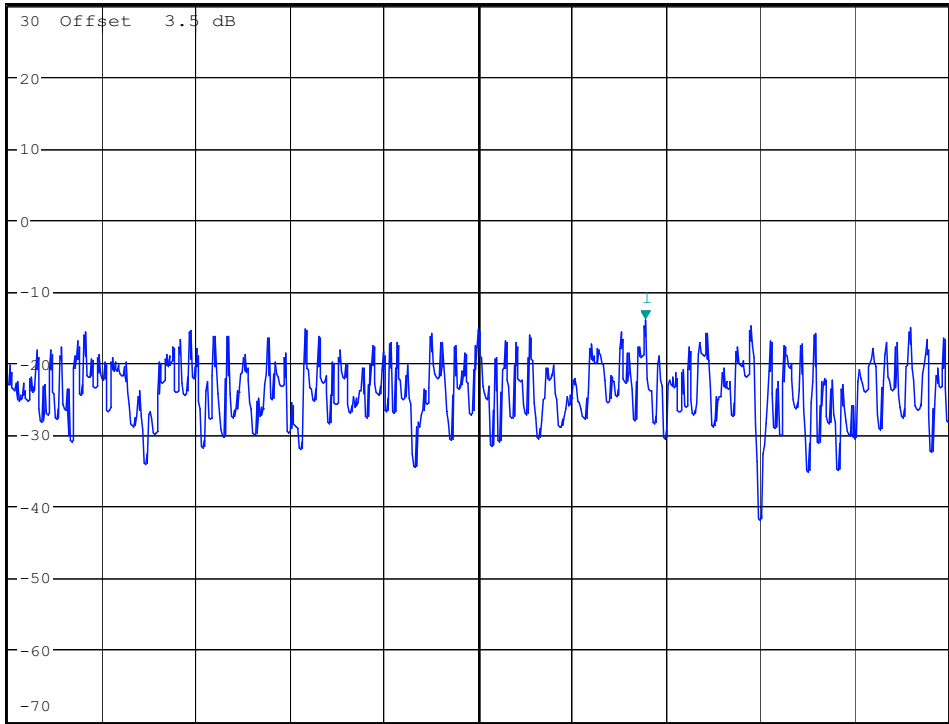

Center 2.437 GHz 150 kHz/ Span 1.5 MHz

Power Density 802.11b 2437MHz


Date: 16.APR.2007 10:11:28



*RBW 3 kHz Marker 1 [T1]
*VBW 100 kHz -13.57 dBm
*SWT 5 s 2.462266827 GHz

Ref 30 dBm *Att 30 dB

1 PK
MAXH

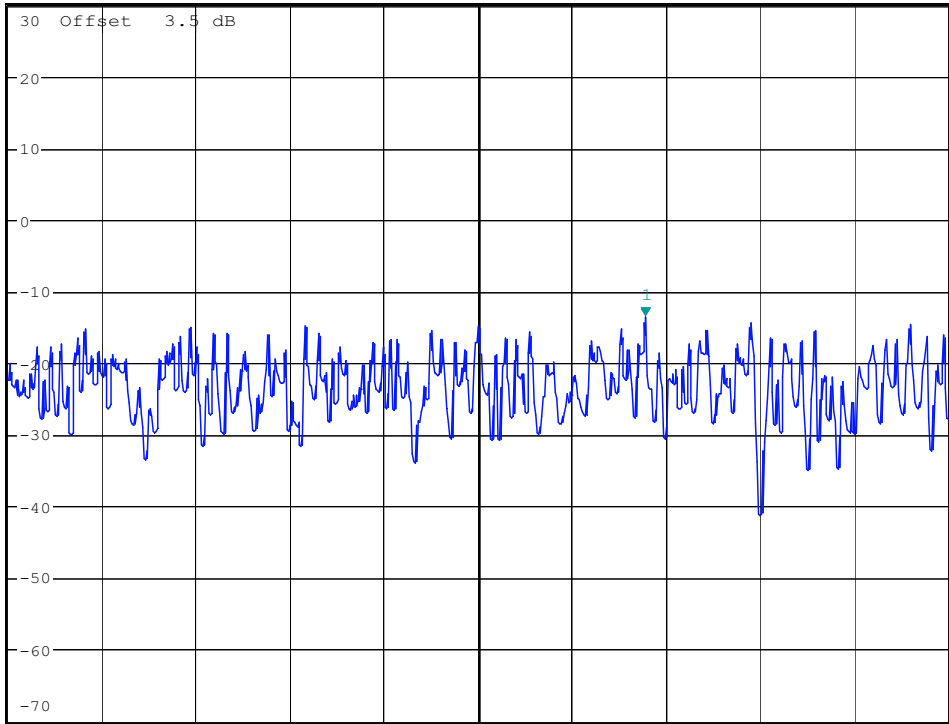

Center 2.462 GHz 150 kHz/ Span 1.5 MHz

Power Density 802.11b 2462MHz


Date: 16.APR.2007 10:12:05



*RBW 3 kHz Marker 1 [T1]
*VBW 100 kHz -22.30 dBm
*SWT 5 s 2.411680288 GHz

Ref 30 dBm *Att 30 dB

1 PK
MAXH

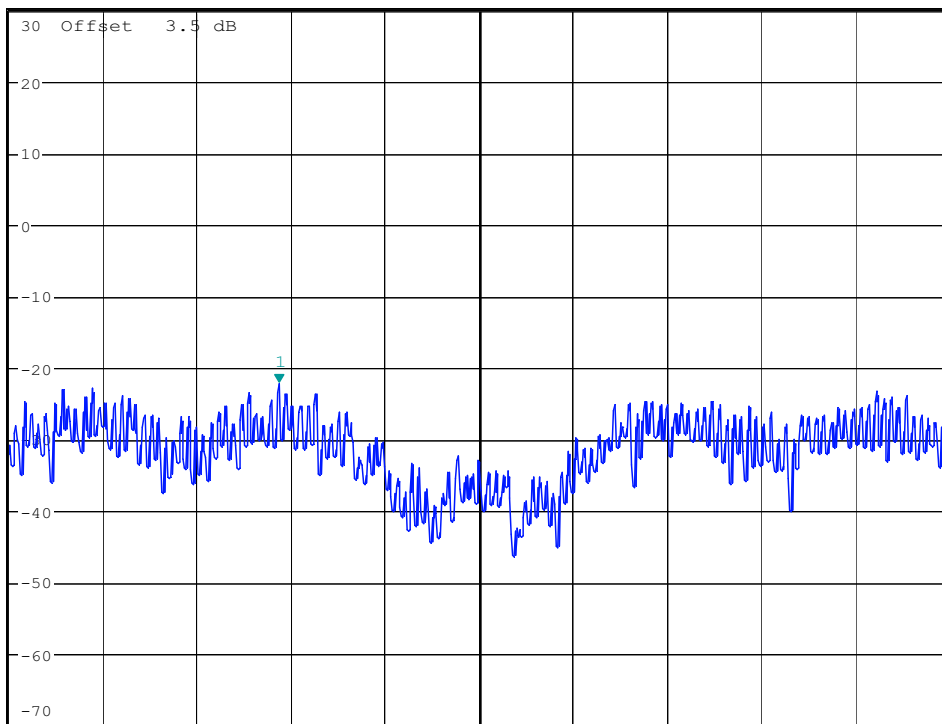

Center 2.412 GHz 150 kHz/ Span 1.5 MHz

Power Density 802.11g 2412MHz


Date: 16.APR.2007 10:13:48



*RBW 3 kHz Marker 1 [T1]
*VBW 100 kHz -21.82 dBm
*SWT 5 s 2.436680288 GHz

Ref 30 dBm *Att 30 dB

1 PK
MAXH

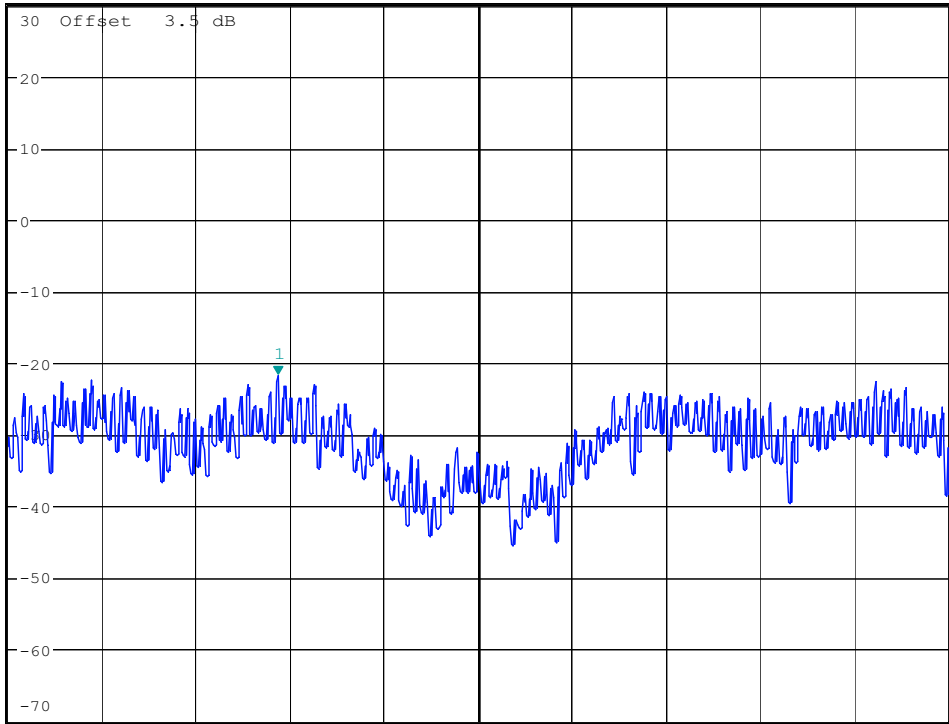

Center 2.437 GHz 150 kHz/ Span 1.5 MHz

Power Density 802.11g 2437MHz


Date: 16.APR.2007 10:13:17



*RBW 3 kHz Marker 1 [T1]
*VBW 100 kHz -21.45 dBm
*SWT 5 s 2.461680288 GHz

Ref 30 dBm *Att 30 dB

1 PK
MAXH

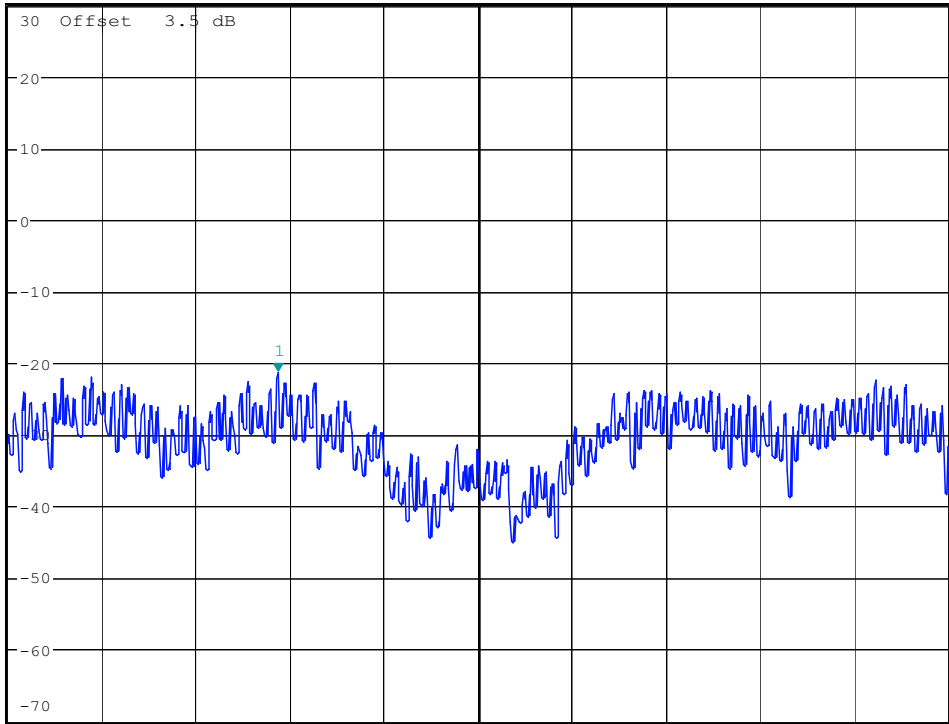

Center 2.462 GHz 150 kHz/ Span 1.5 MHz


Power Density 802.11g 2462MHz

Date: 16.APR.2007 10:12:42

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HK 116
Freq:165.932MHz Emax:25.49dBµV/m RBW: 100 kHz

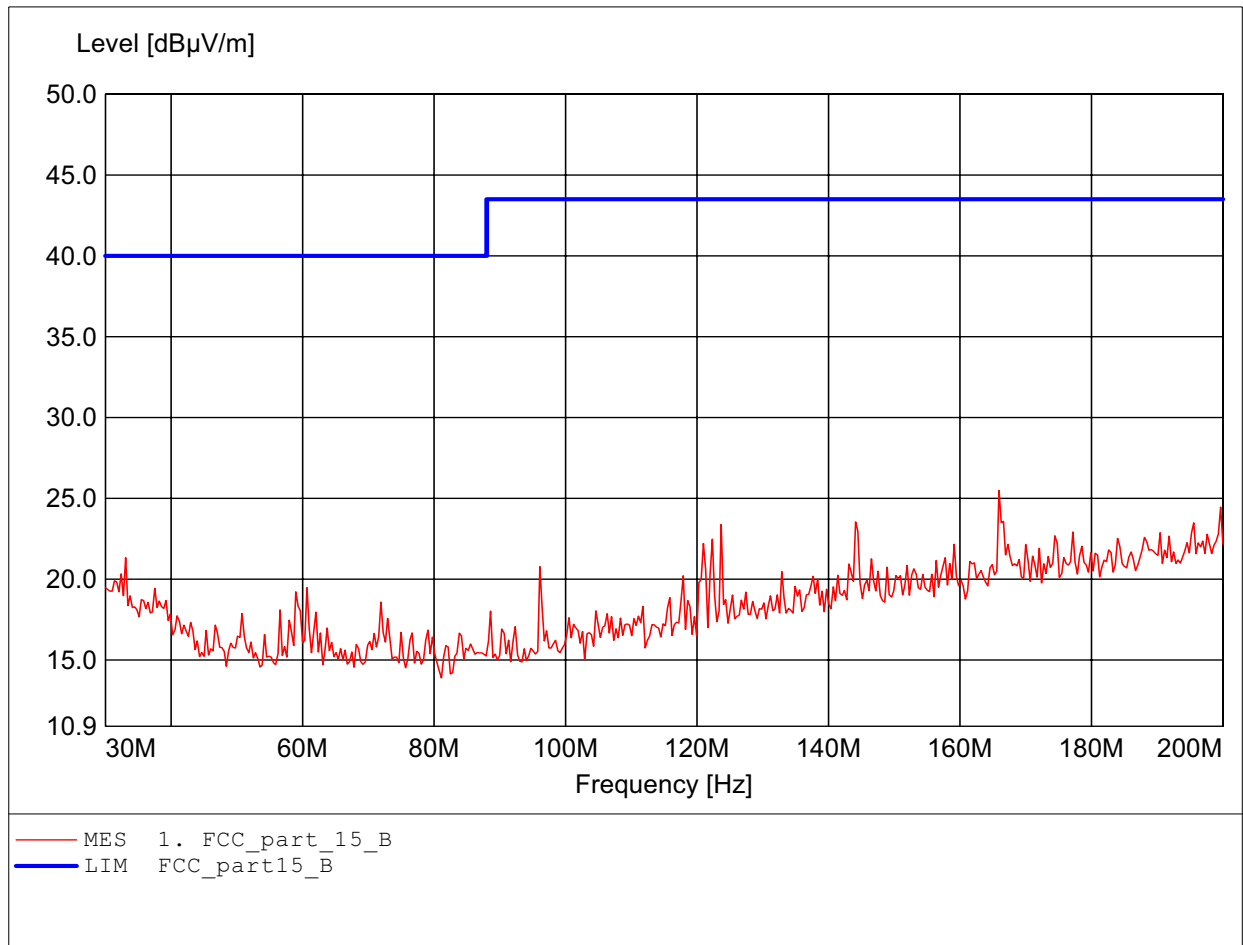

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HK 116
Freq:88.597MHz Emax:29.29dBµV/m RBW: 100 kHz

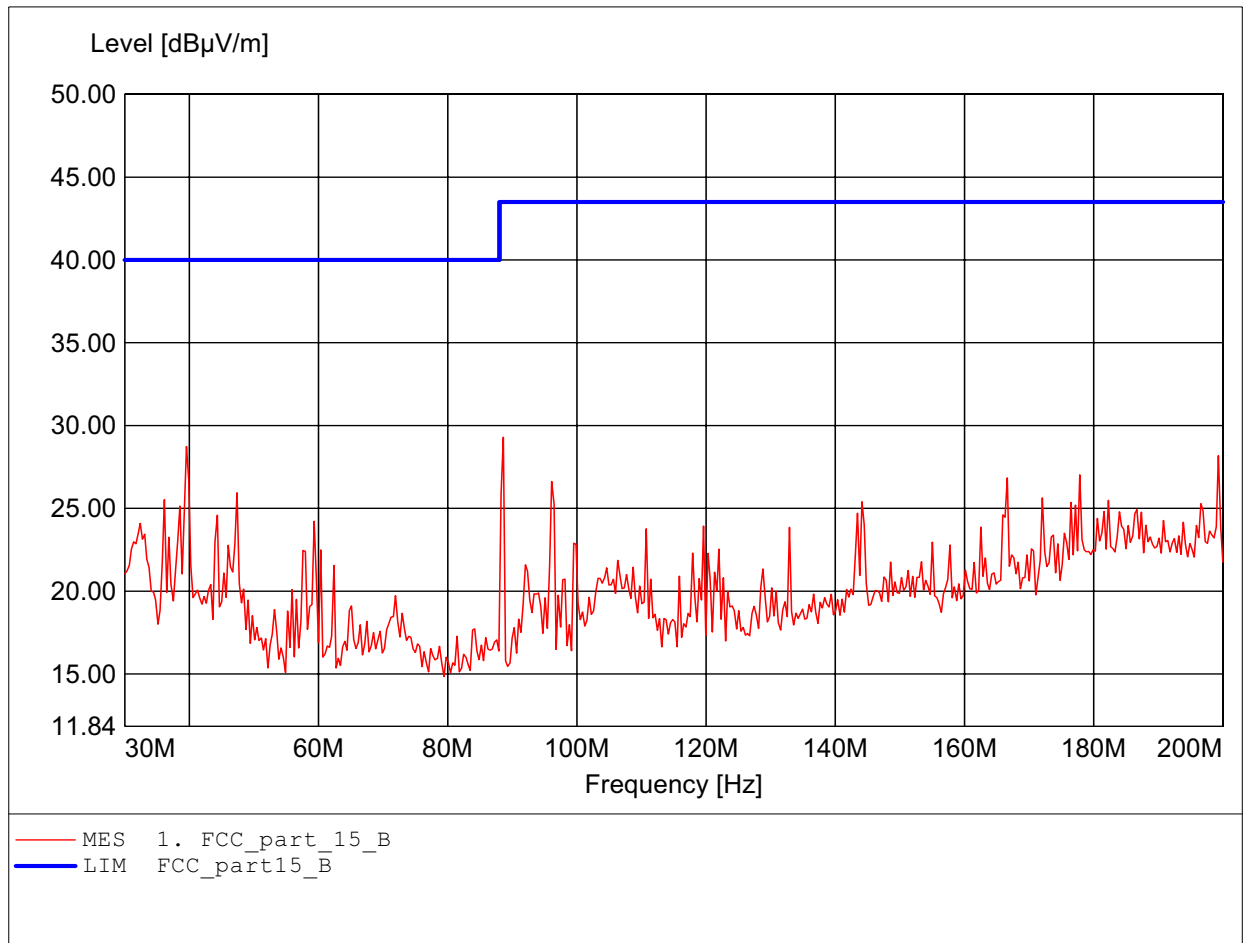

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Test Specification: according to subpart B / LP 0002
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Freq:240.080MHz Emax:38.31dBµV/m RBW: 100 kHz

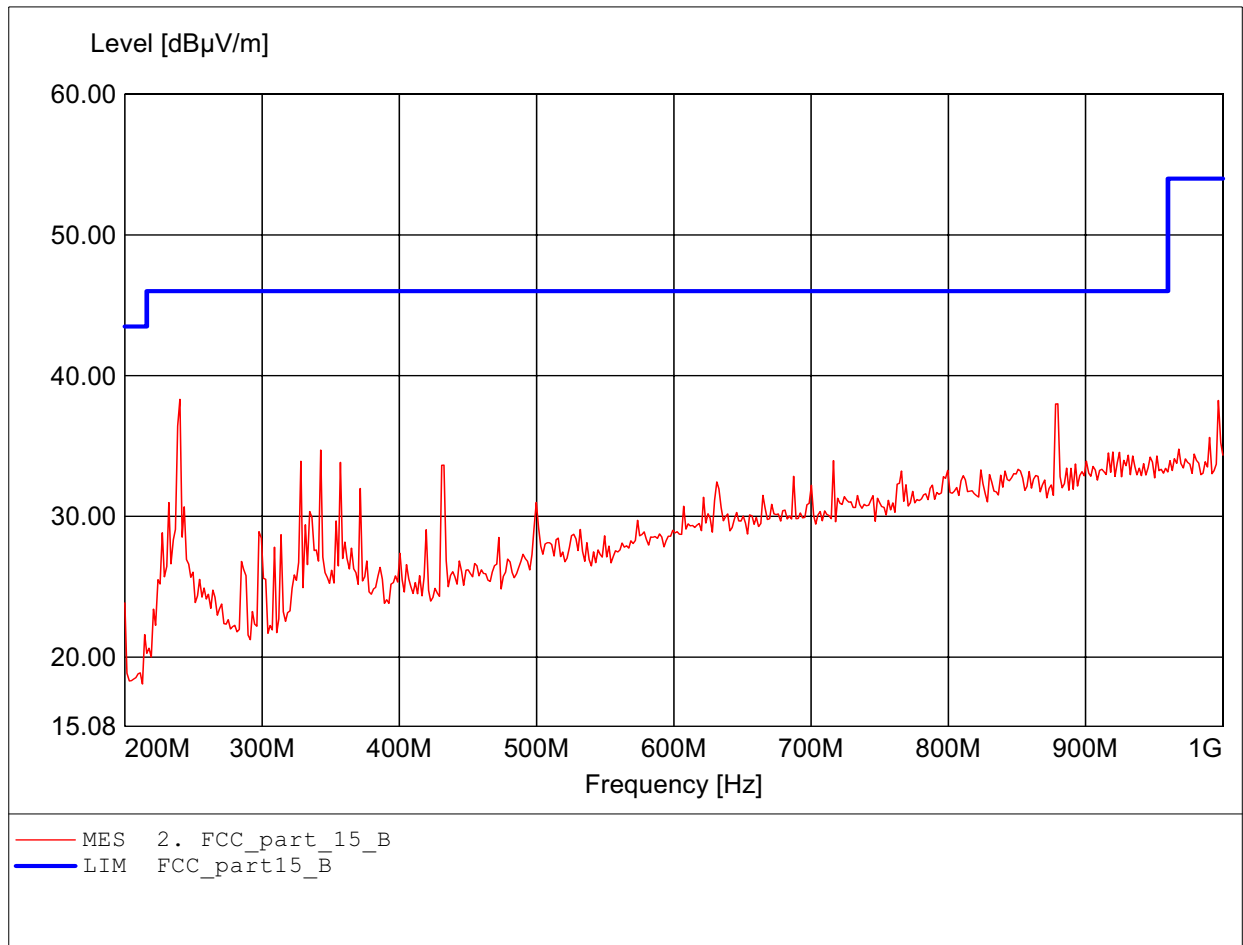

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL 223, ampl.
Freq:878.156MHz Emax:38.12dBµV/m RBW: 100 kHz

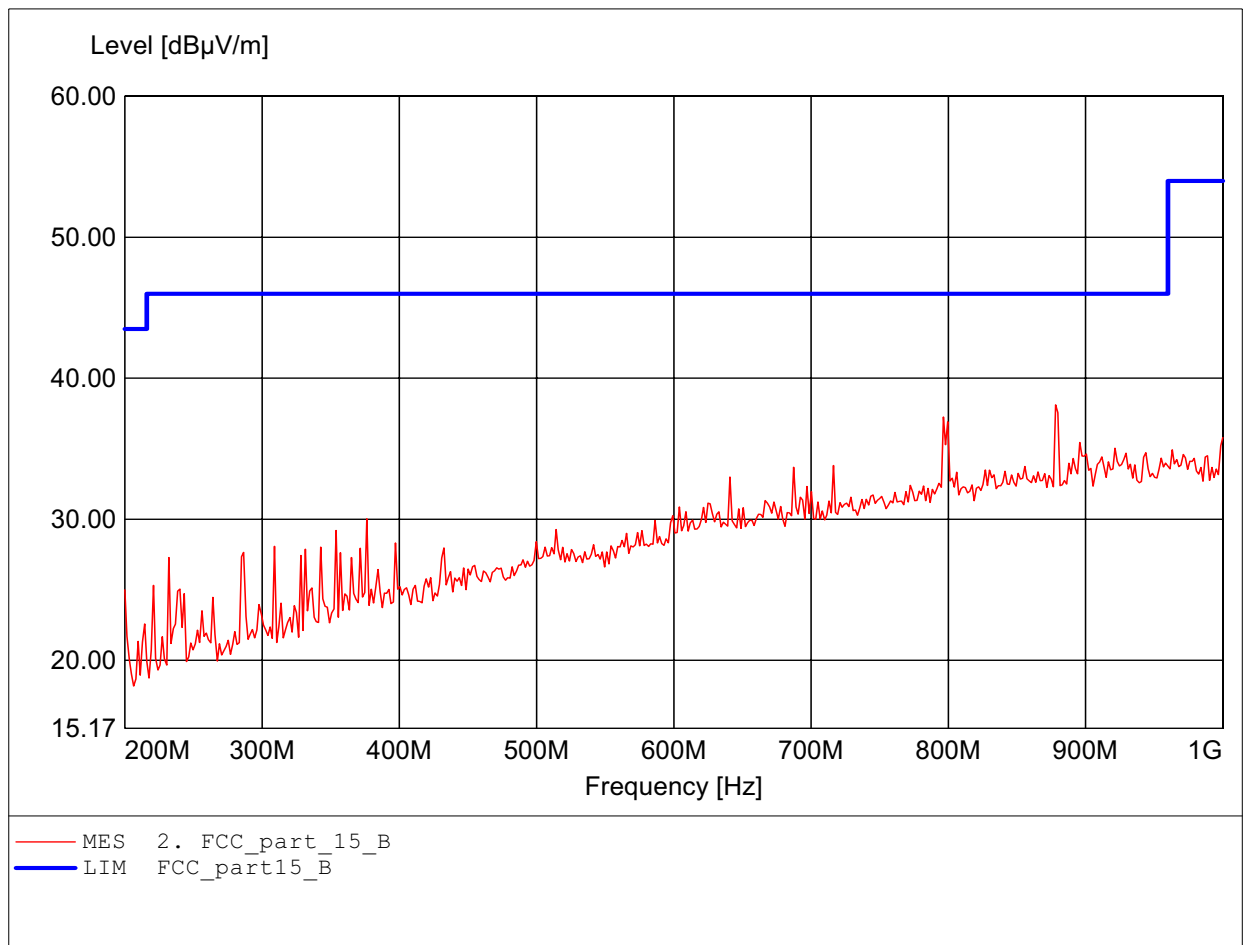

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:3.218GHz Emax:39.11dBμV/m RBW: 1 MHz

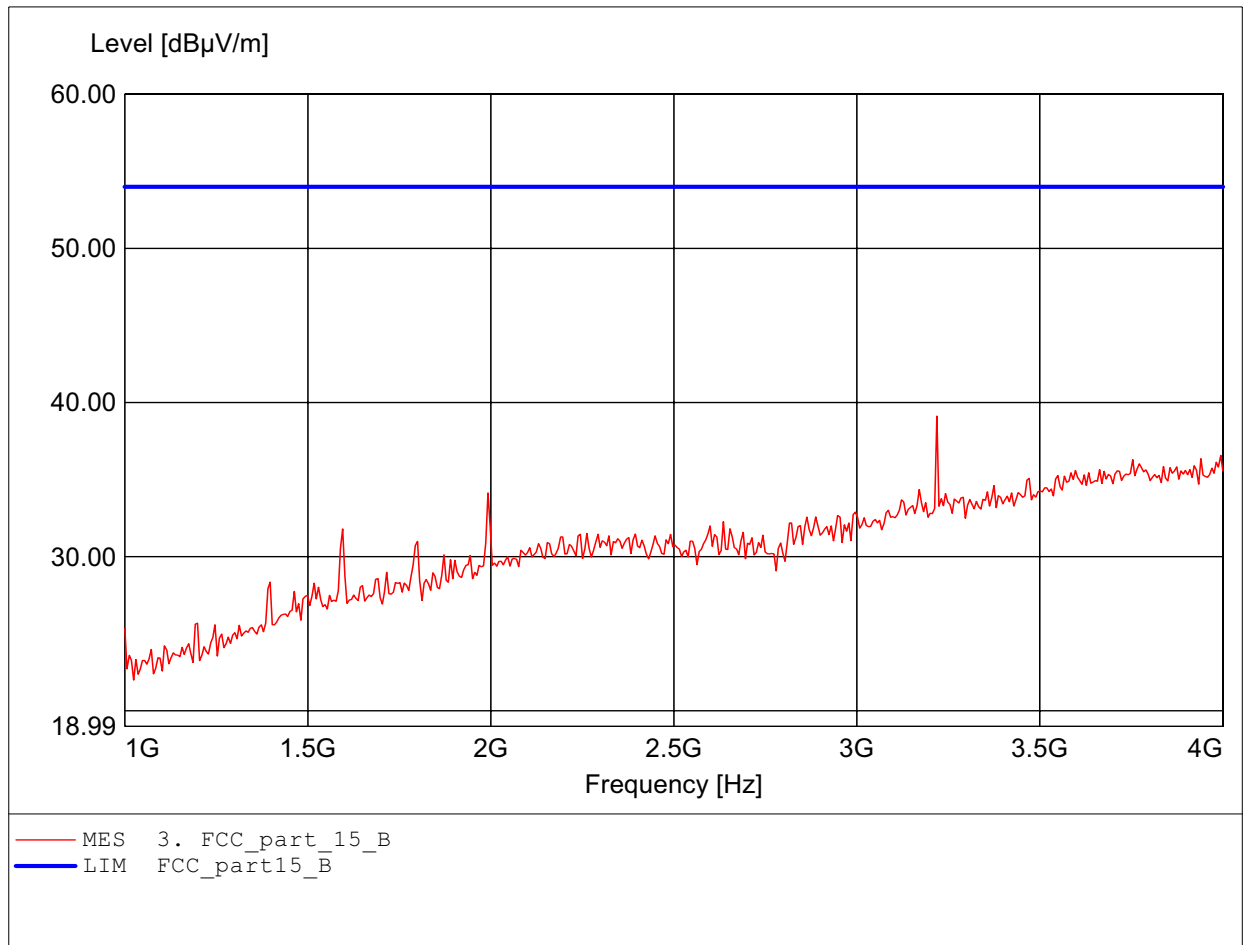

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:3.218GHz Emax:43.25dBμV/m RBW: 1 MHz

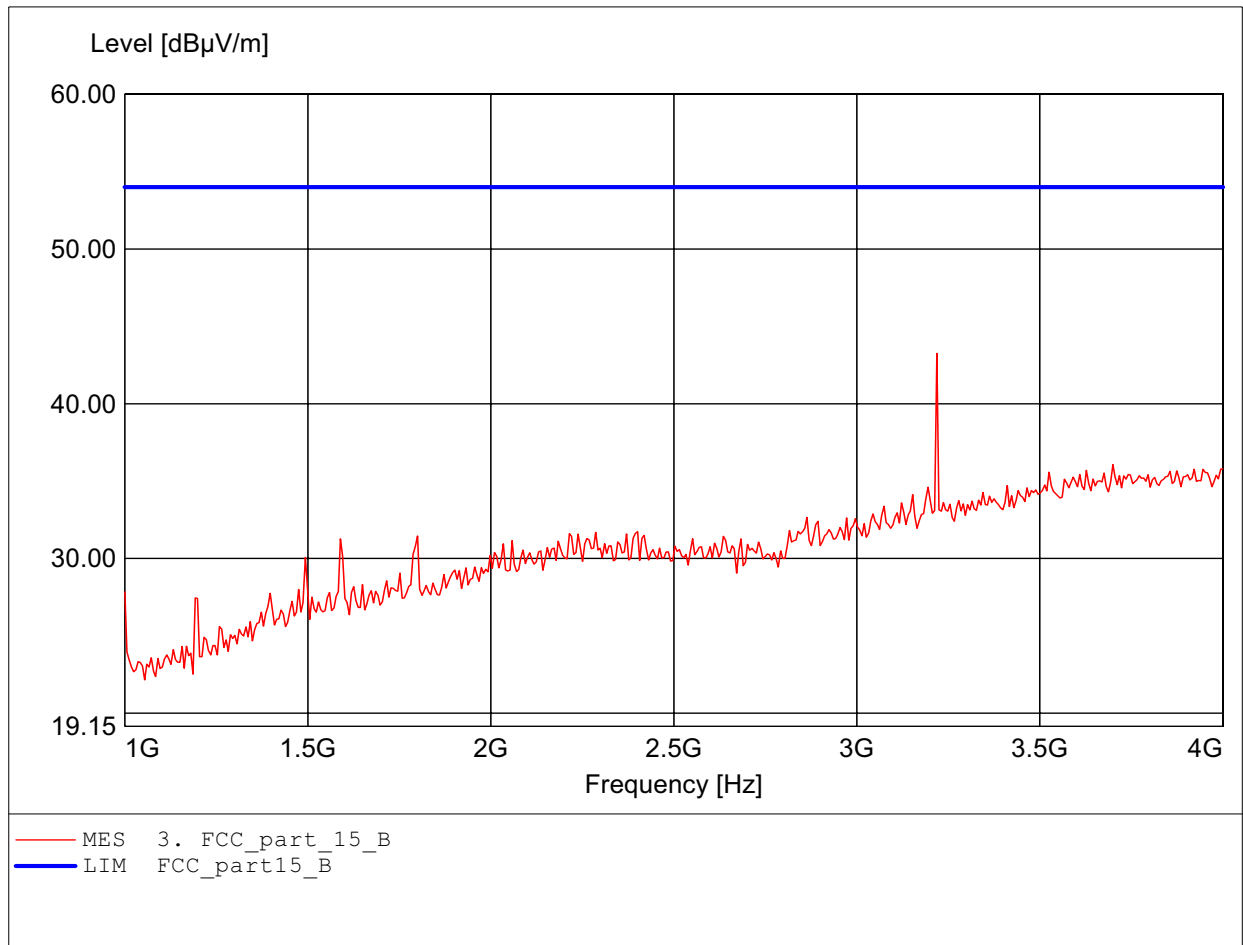

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:7.936GHz Emax:46.78dBμV/m RBW: 1 MHz

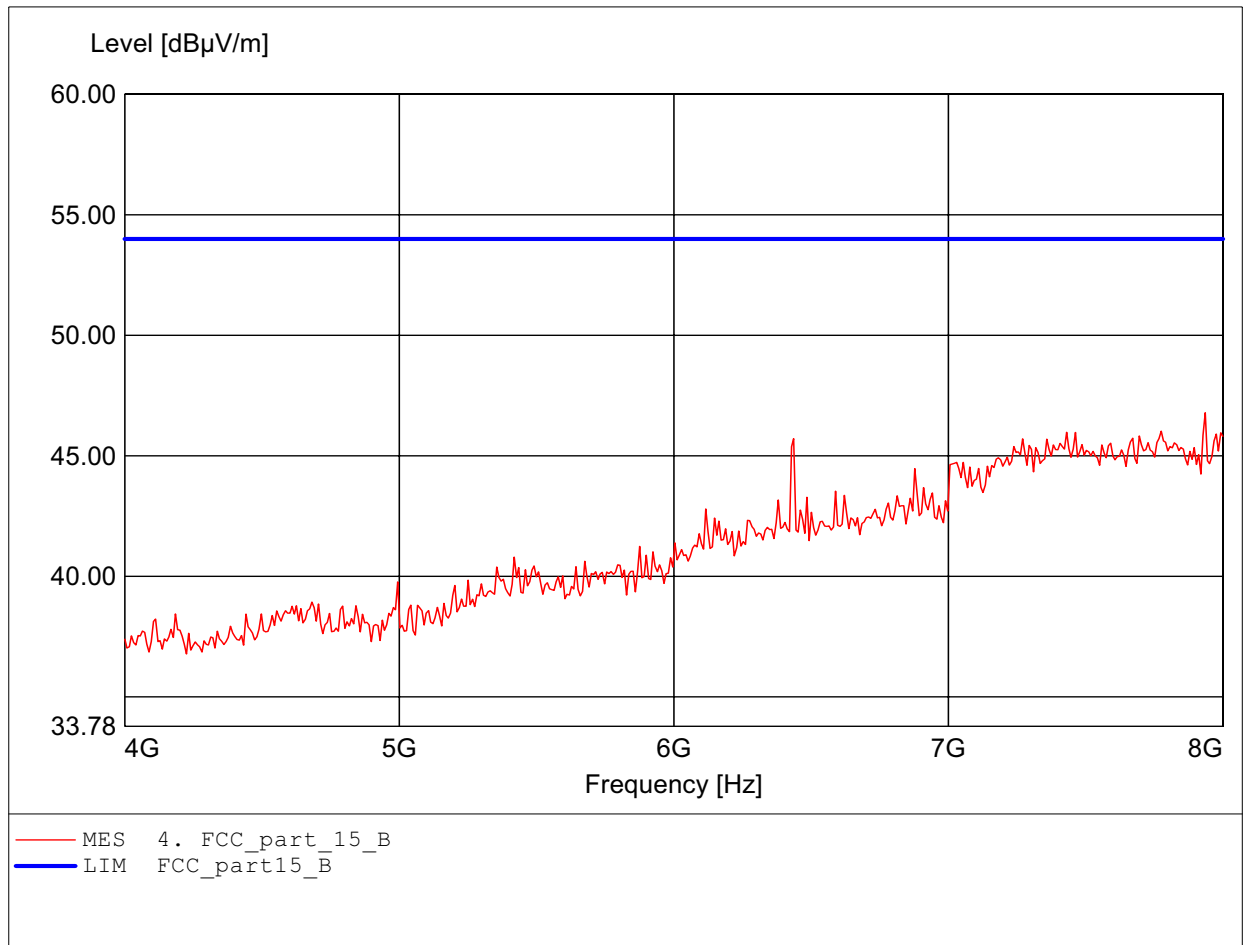

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:6.437GHz Emax:49.54dBμV/m RBW: 1 MHz

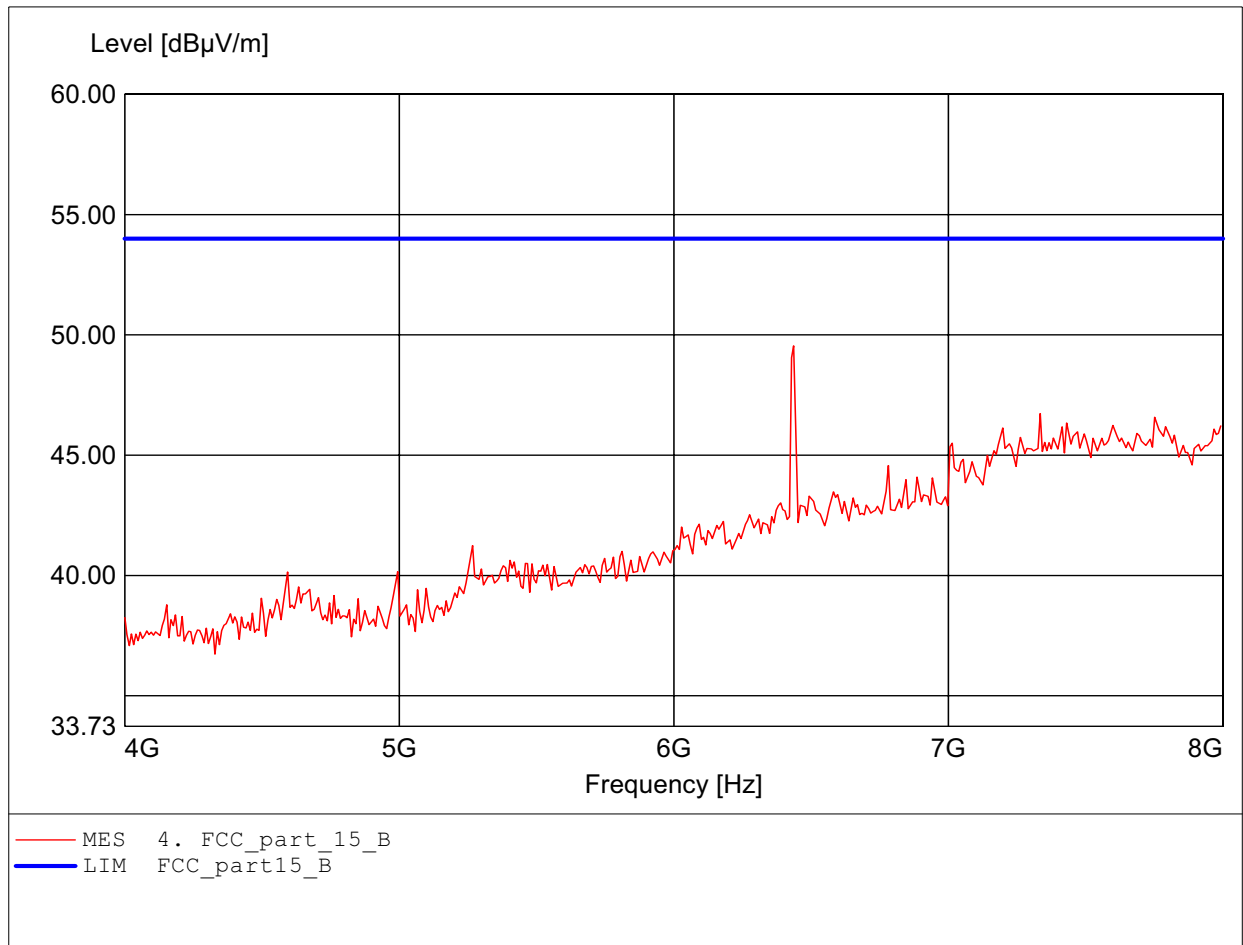

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:11.631GHz Emax:50.84dBμV/m RBW: 1 MHz

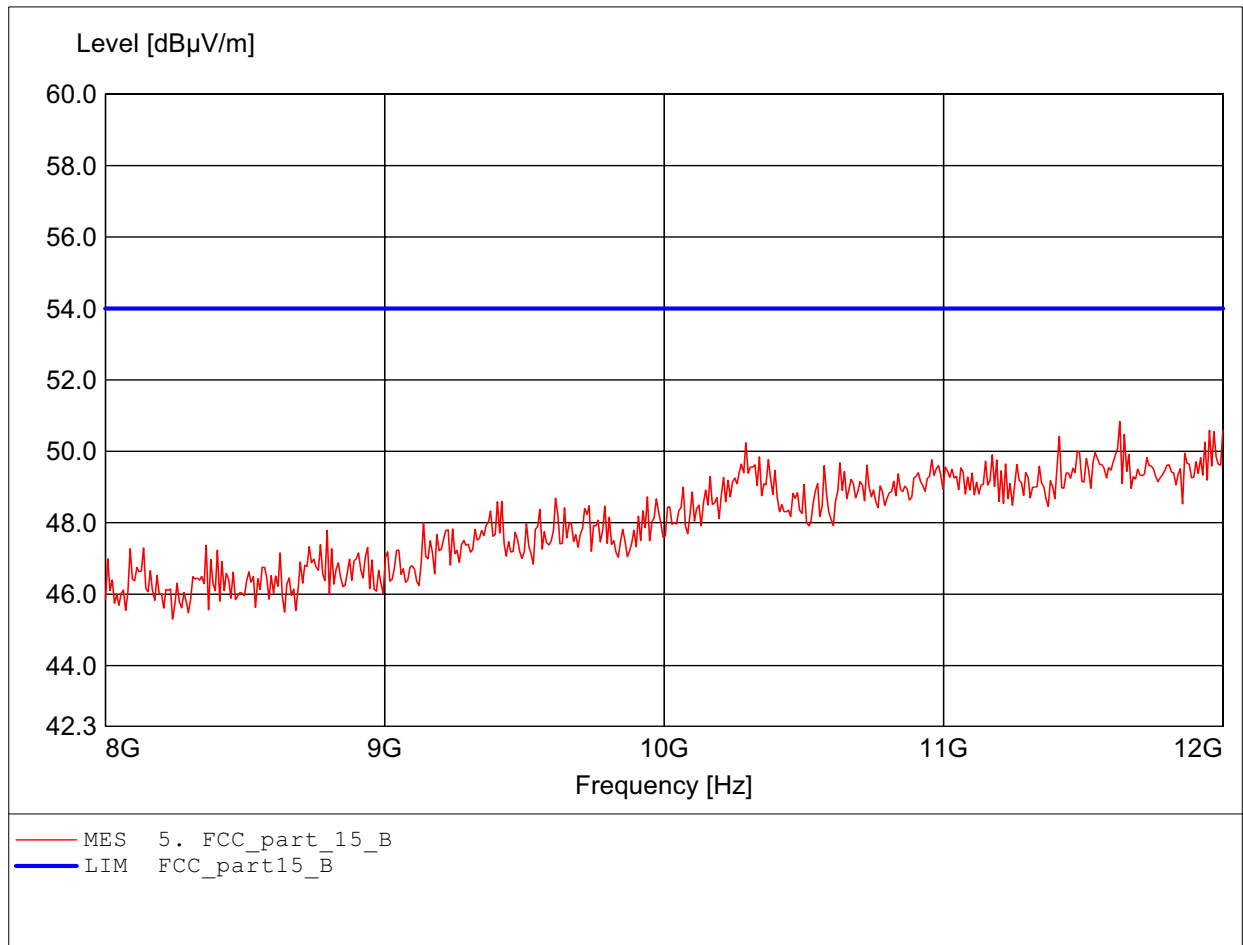

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:11.495GHz Emax:51.06dBμV/m RBW: 1 MHz

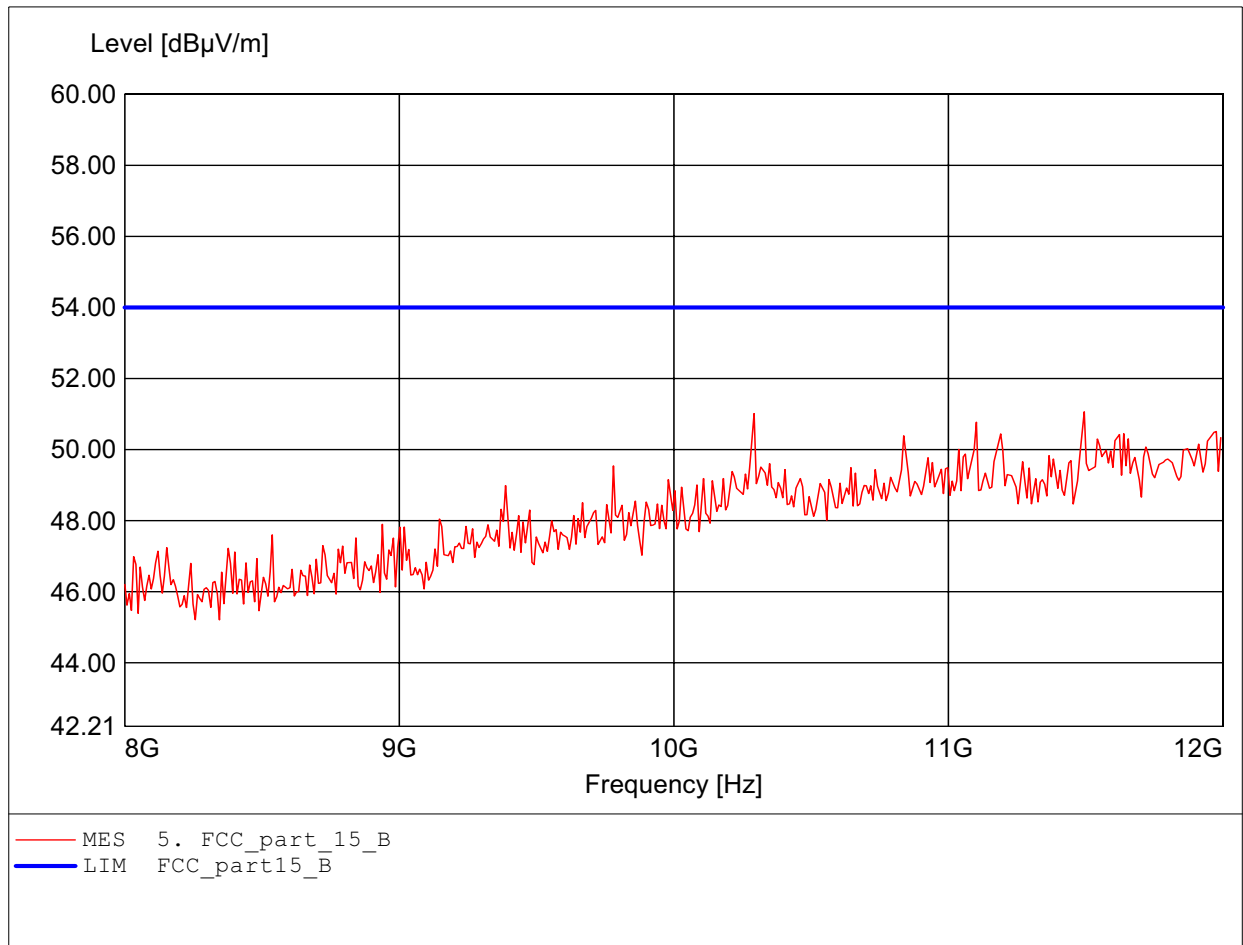

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:17.856GHz Emax:52.78dBμV/m RBW: 1 MHz

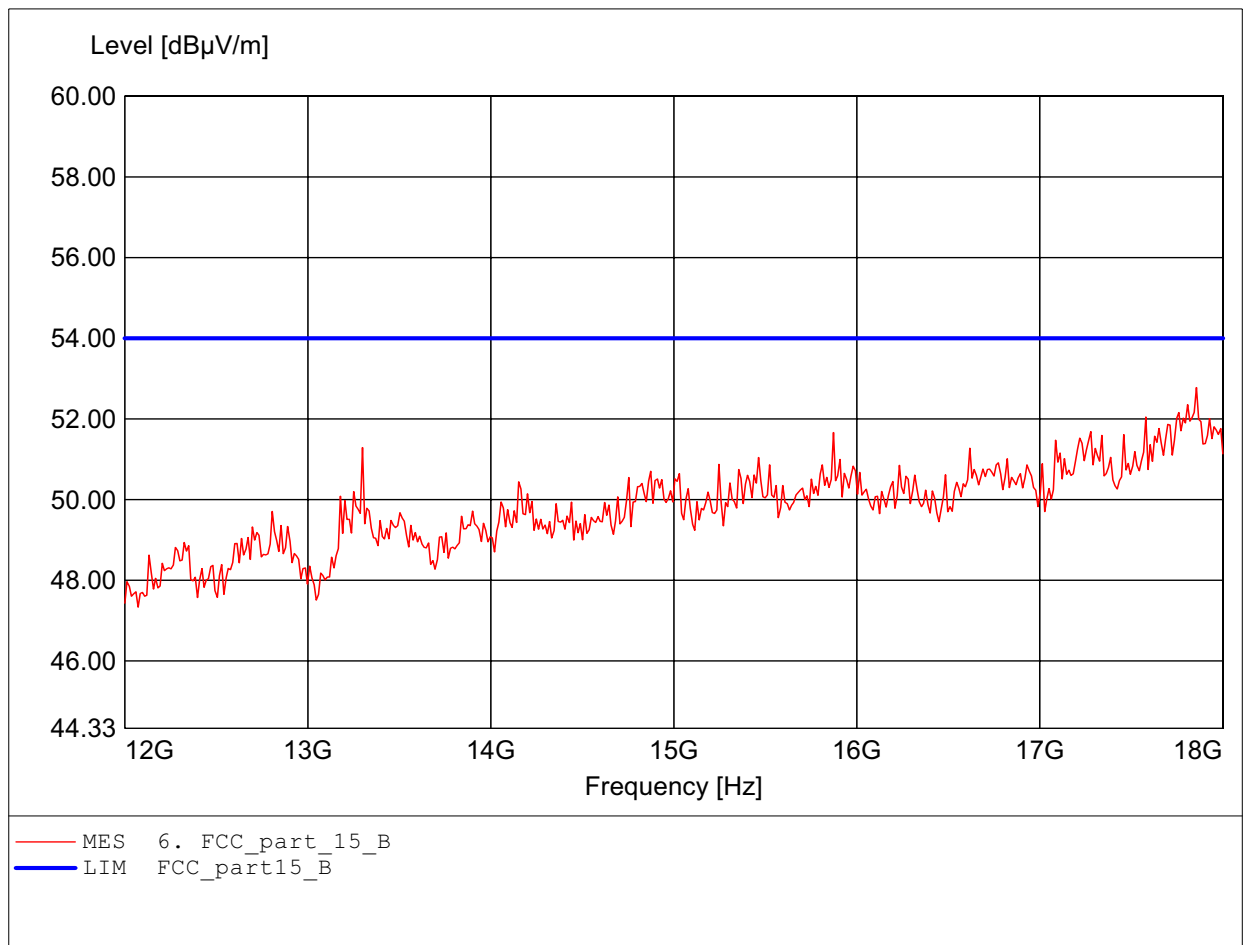

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:17.868GHz Emax:52.20dBµV/m RBW: 1 MHz

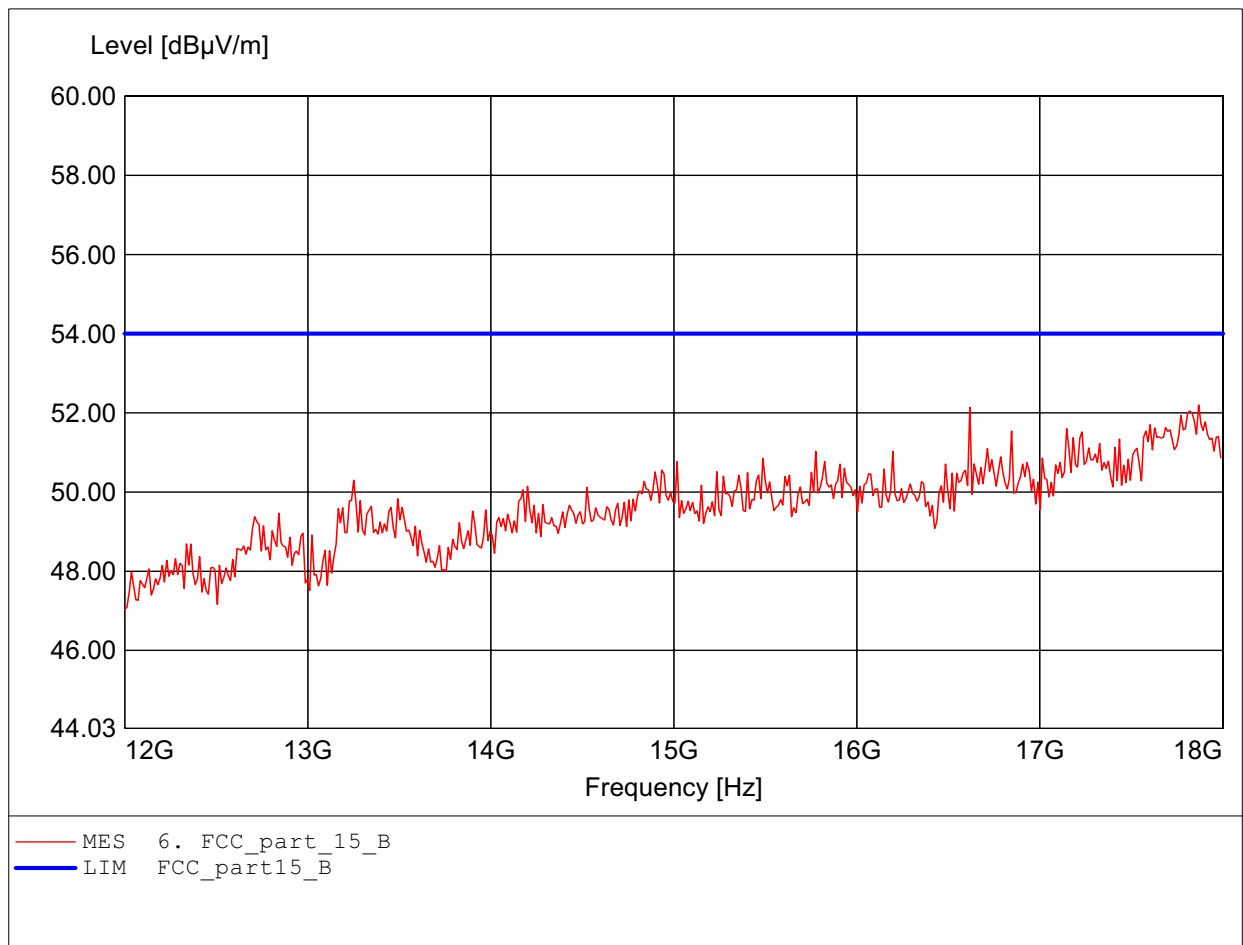

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HK 116
Freq:120.621MHz Emax:24.95dBµV/m RBW: 100 kHz

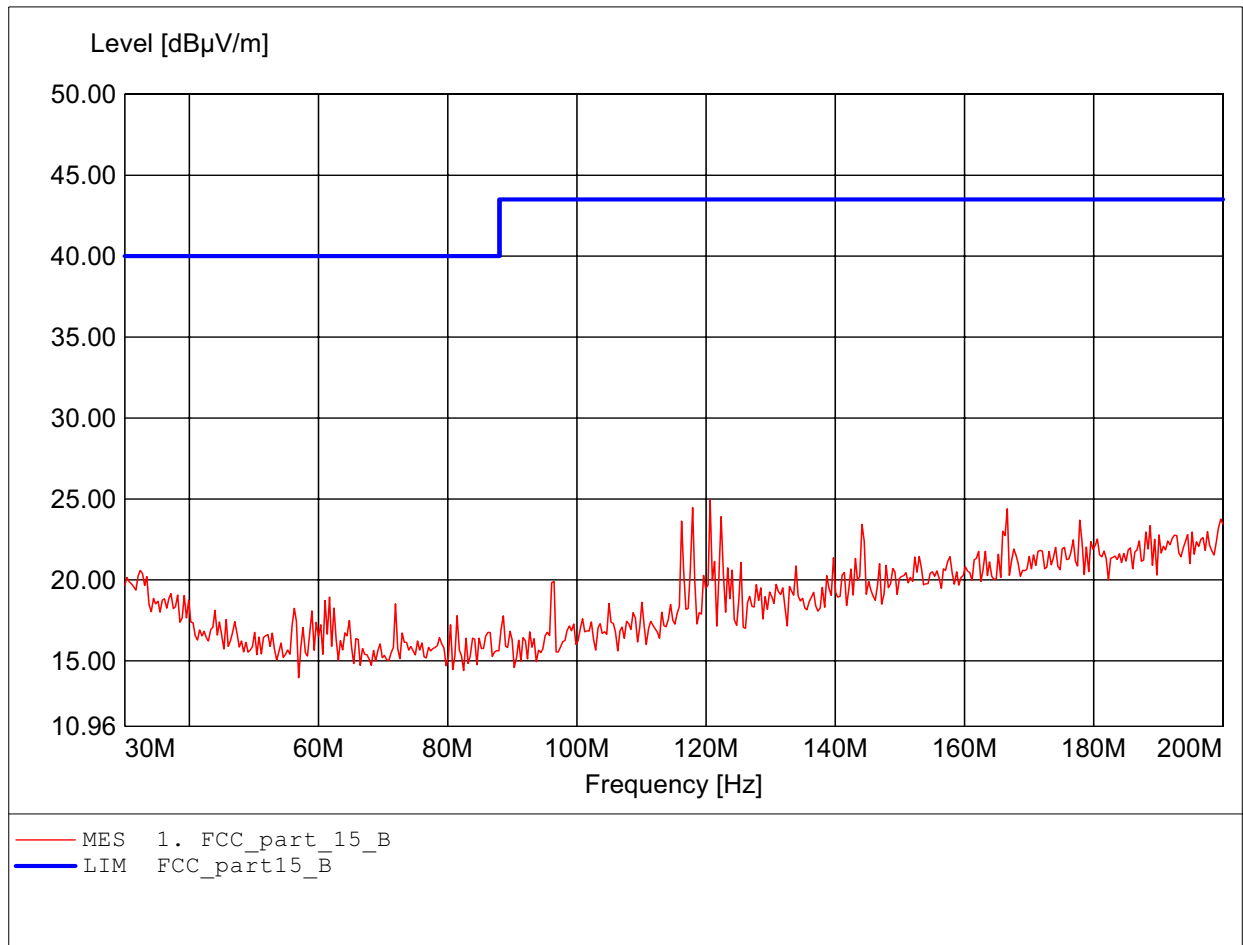

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HK 116
Freq:88.597MHz Emax:29.54dBµV/m RBW: 100 kHz

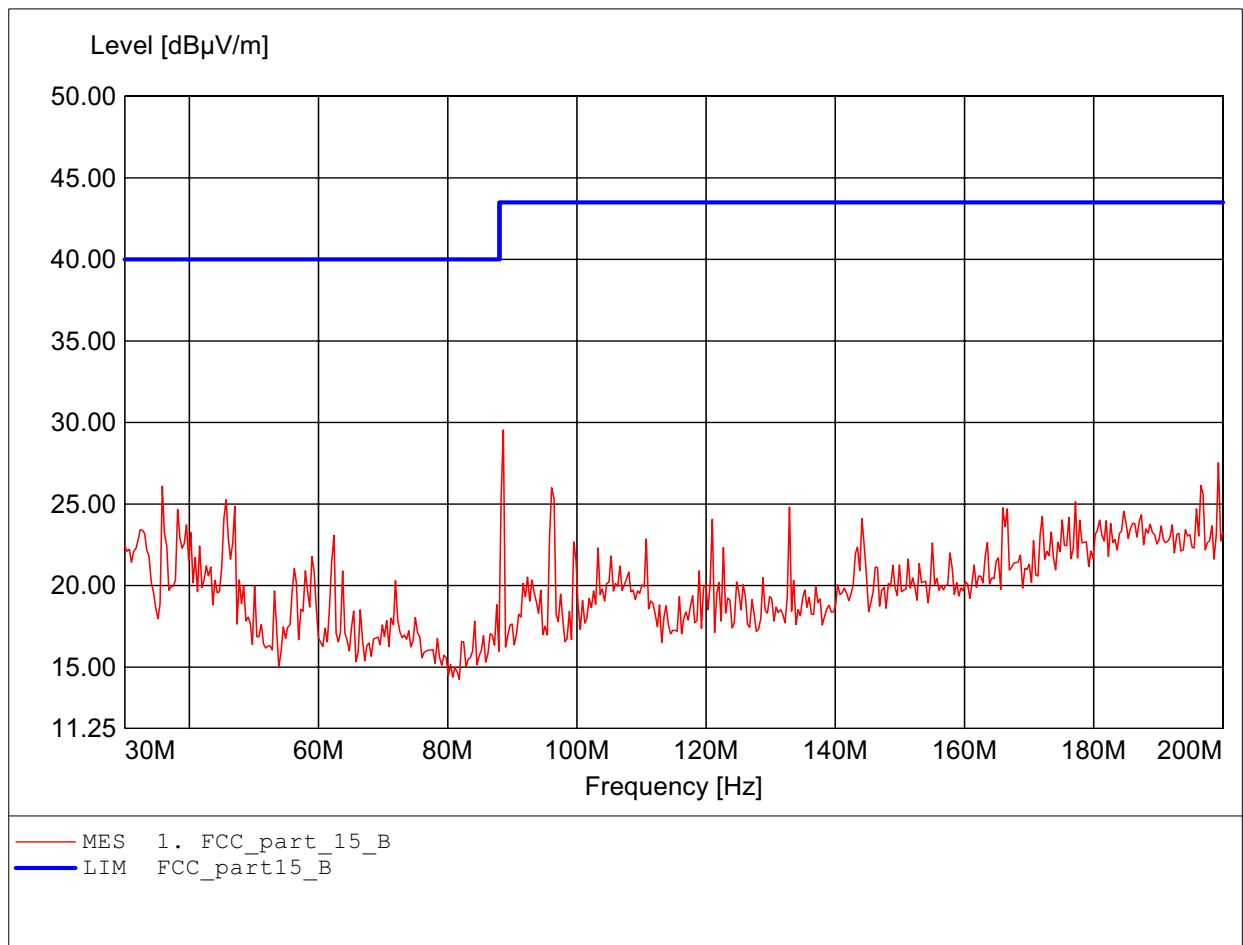

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL 223, ampl.
Freq:240.080MHz Emax:37.84dBuV/m RBW: 100 kHz

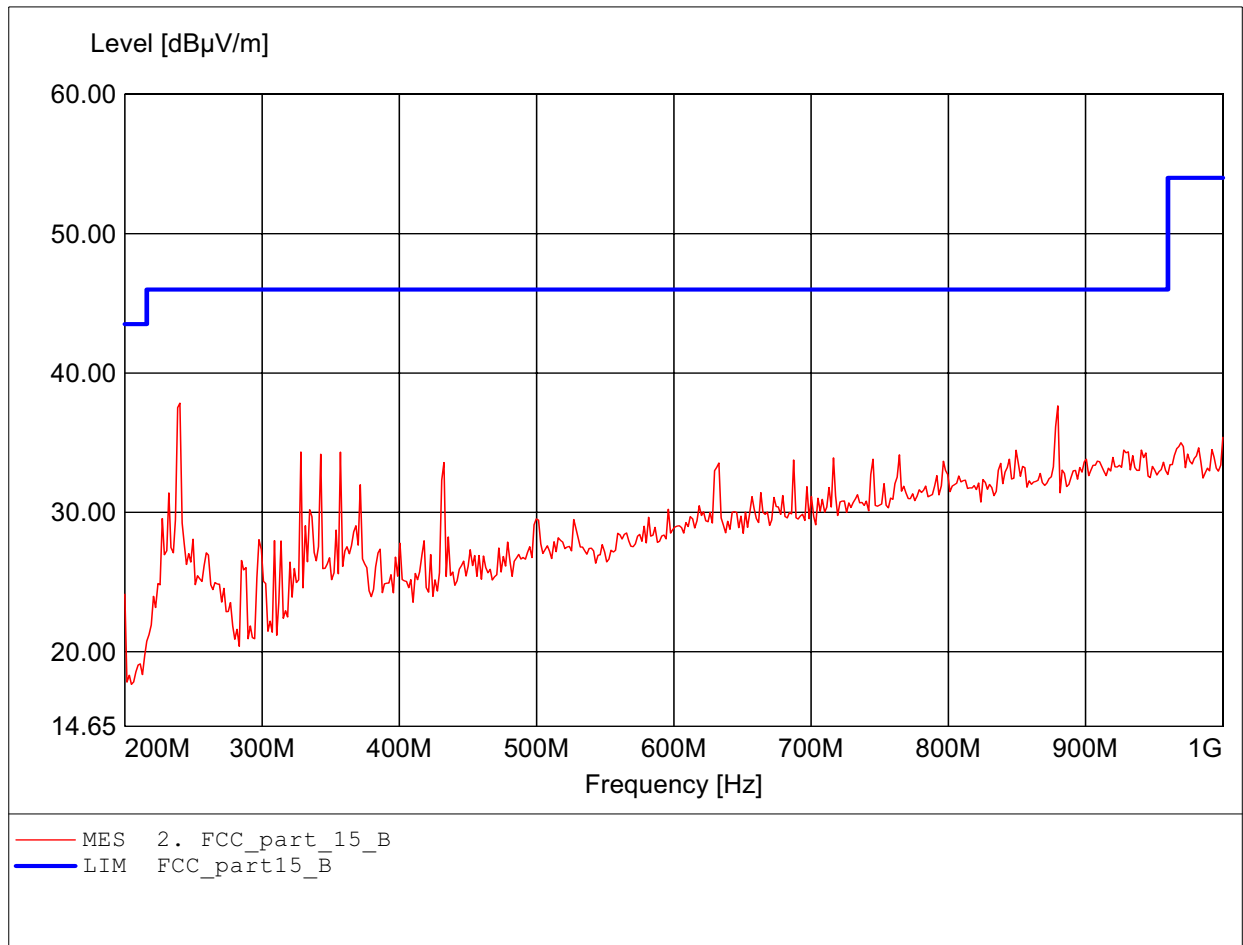

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL 223, ampl.
Freq:1.000GHz Emax:37.42dBμV/m RBW: 100 kHz

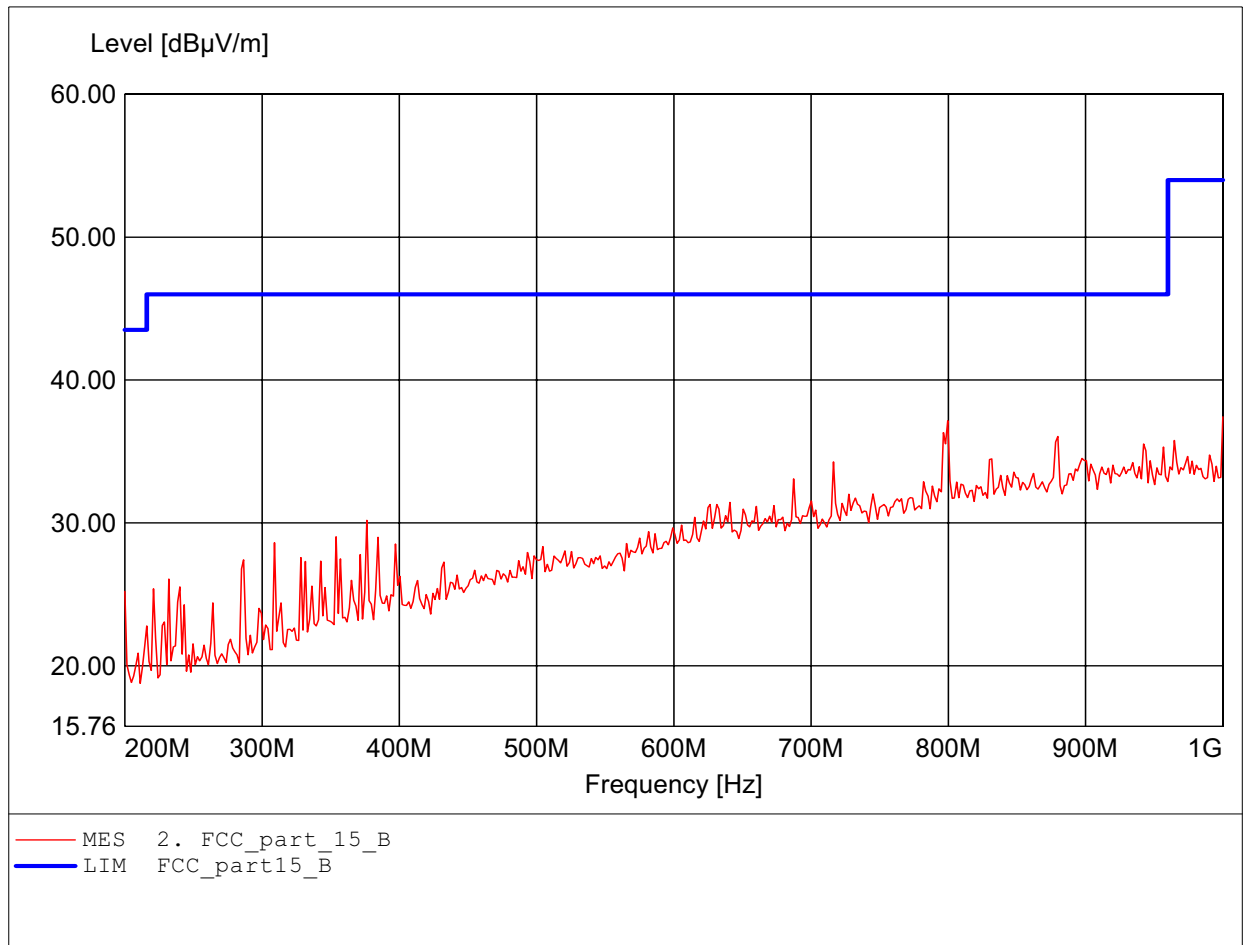

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:3.952GHz Emax:36.79dBμV/m RBW: 1 MHz

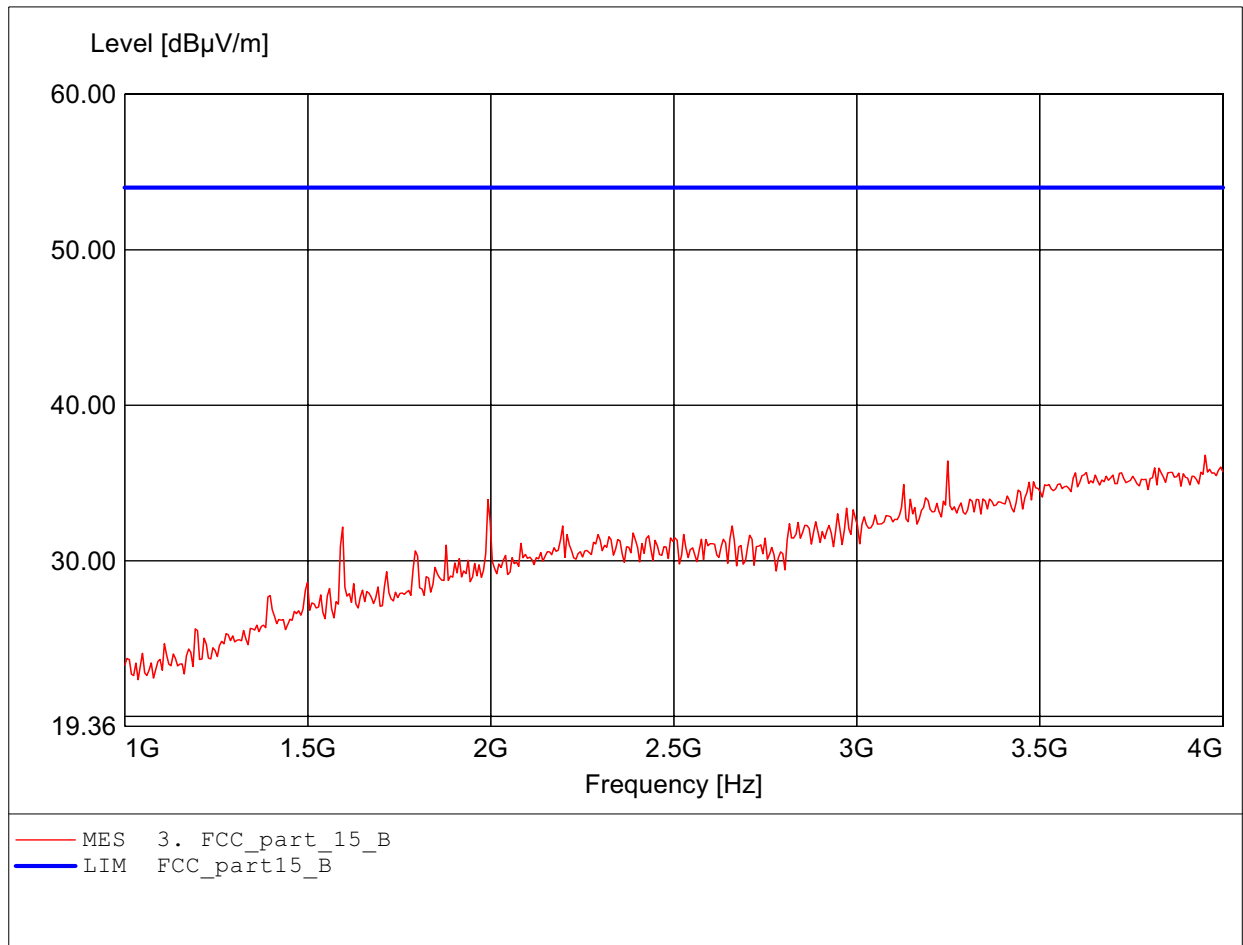

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:3.248GHz Emax:42.35dBμV/m RBW: 1 MHz

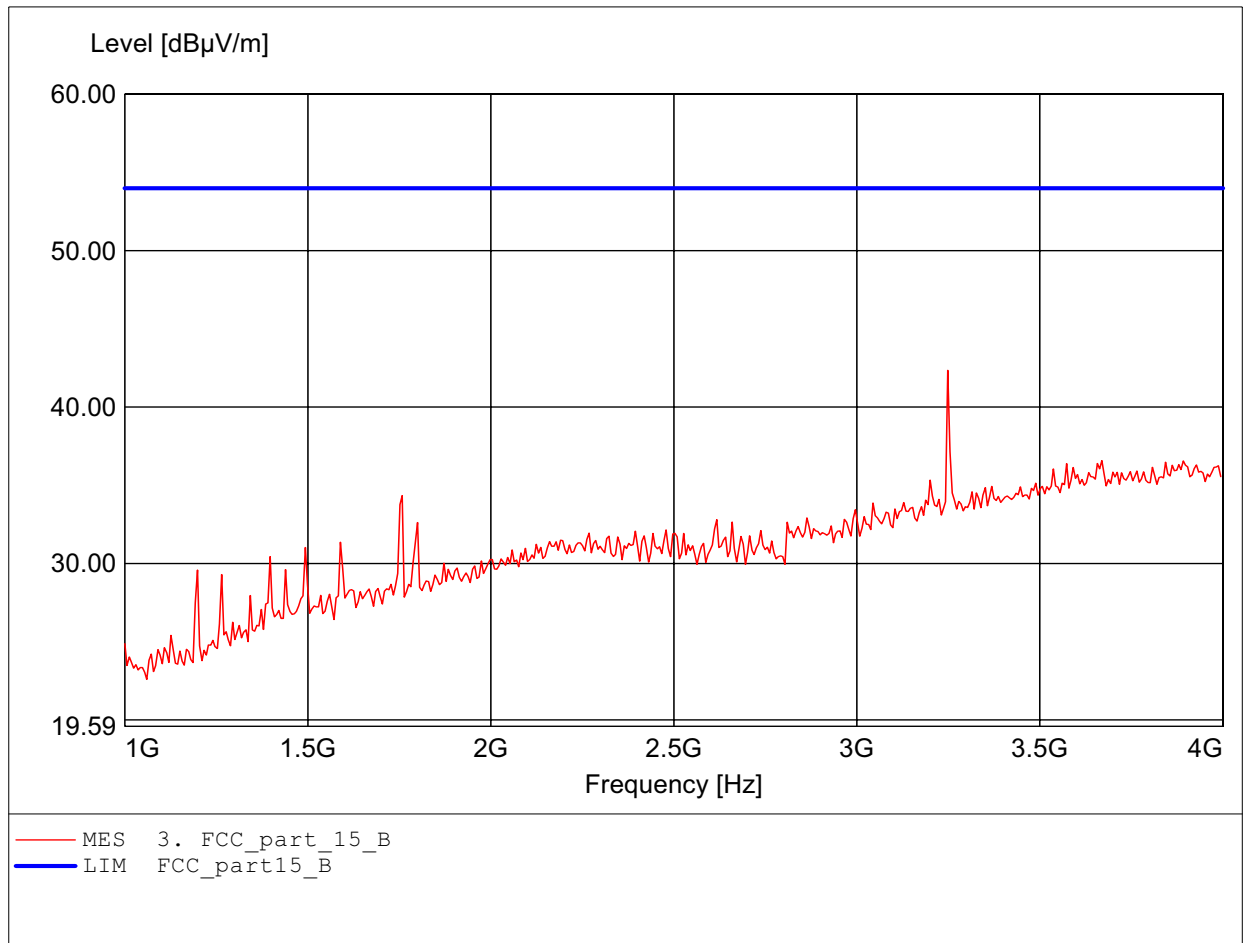

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:7.800GHz Emax:46.34dBμV/m RBW: 1 MHz

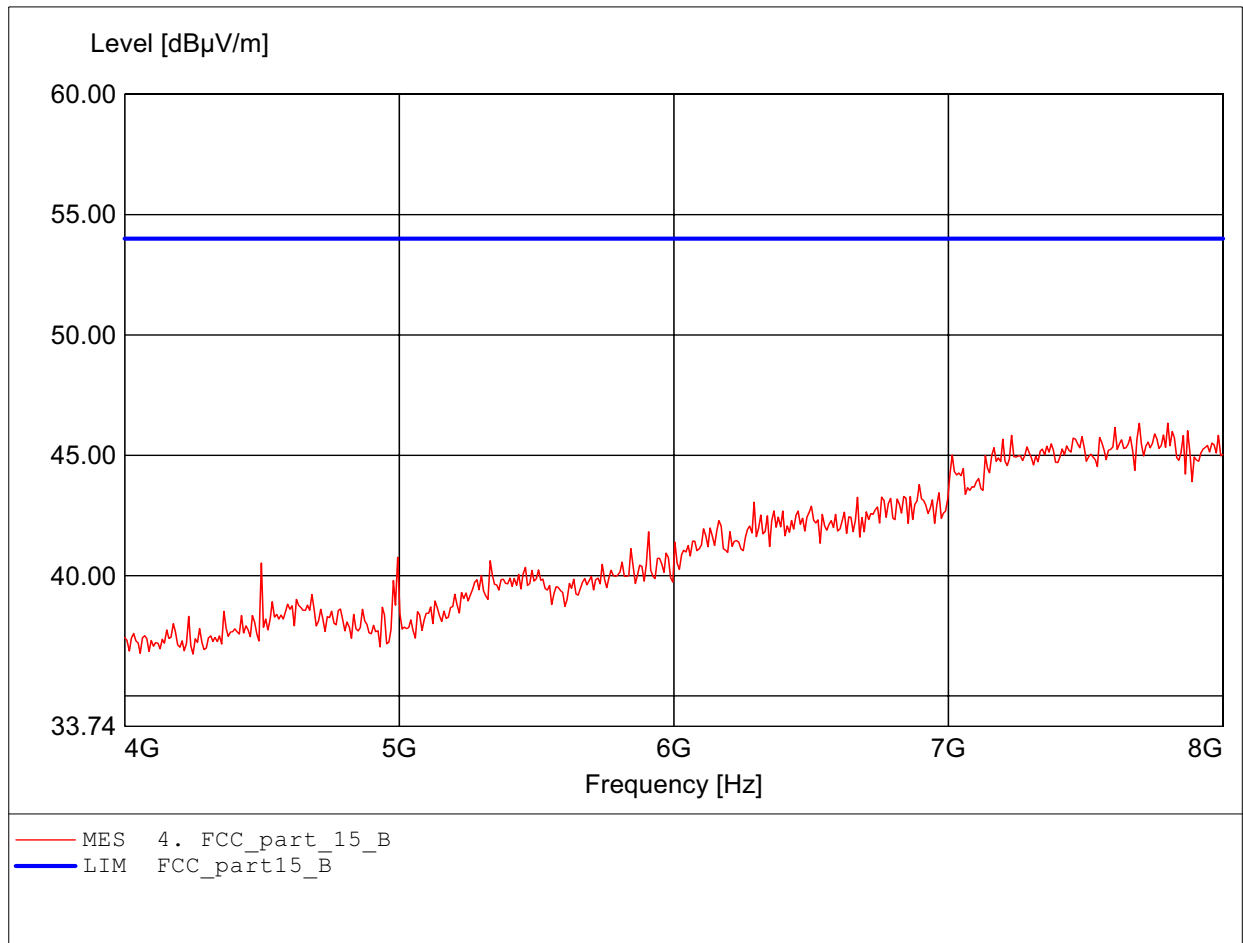

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:6.501GHz Emax:48.72dBμV/m RBW: 1 MHz

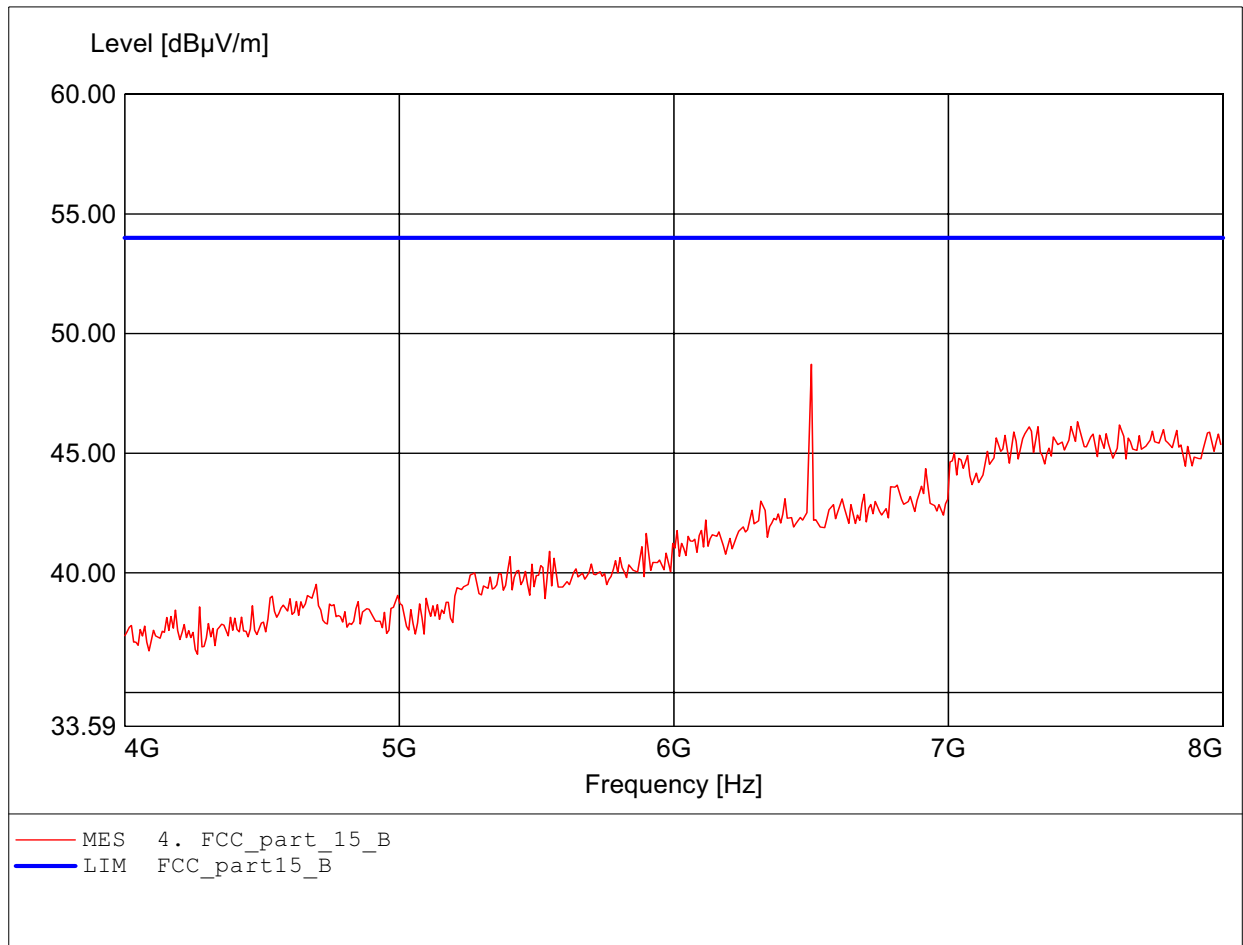

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:11.615GHz Emax:51.35dBμV/m RBW: 1 MHz

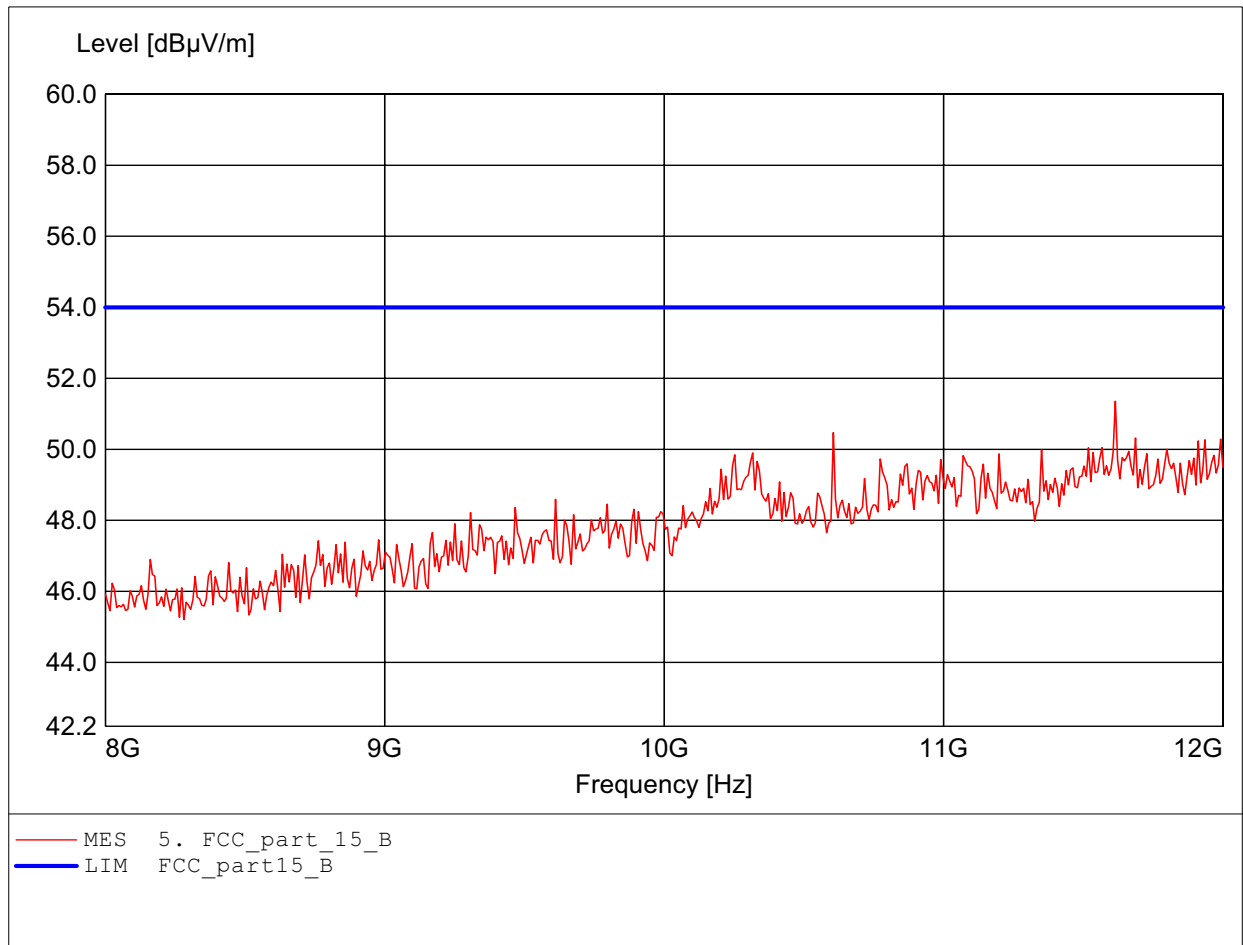

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:11.279GHz Emax:50.31dBµV/m RBW: 1 MHz

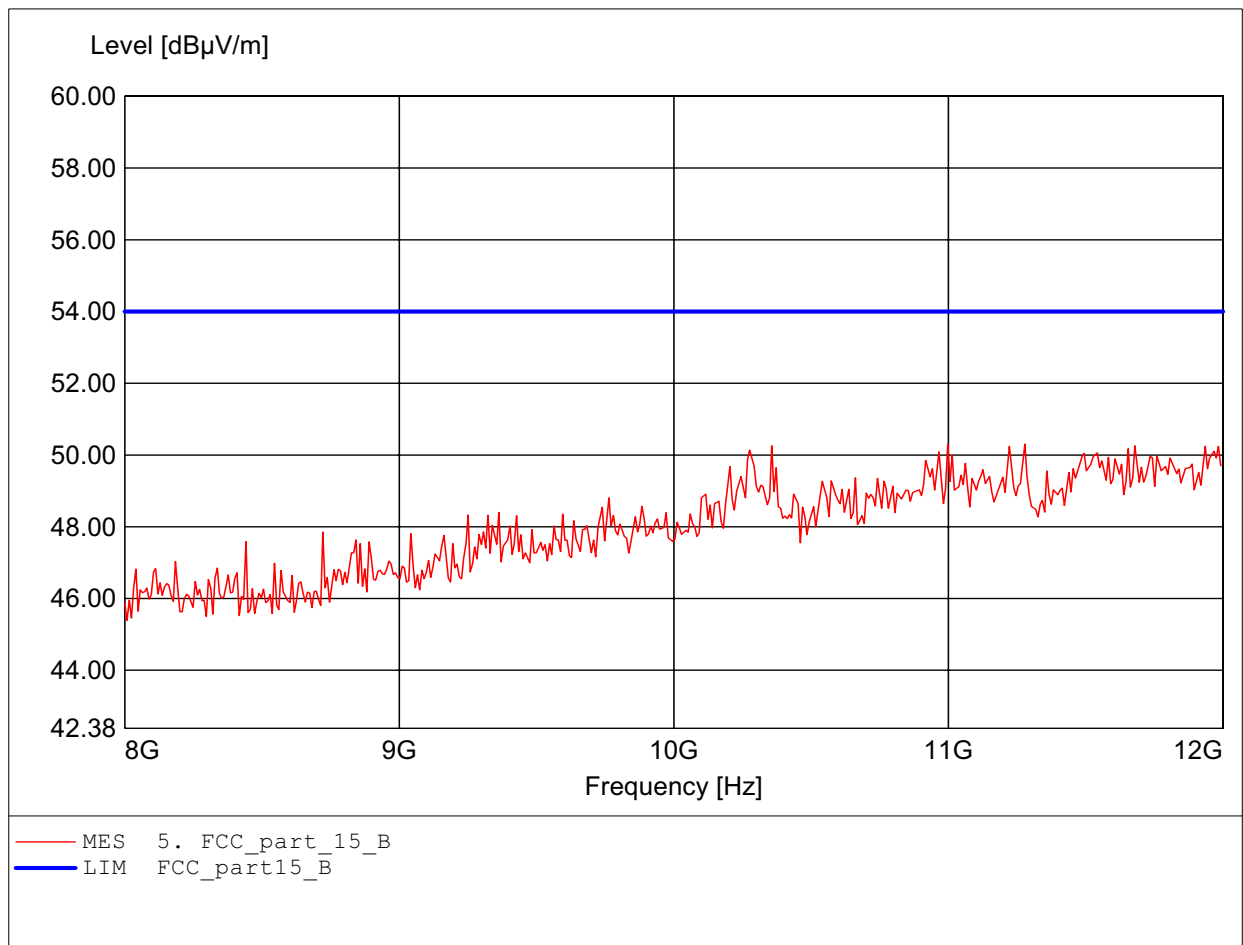

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:17.832GHz Emax:52.91dBμV/m RBW: 1 MHz

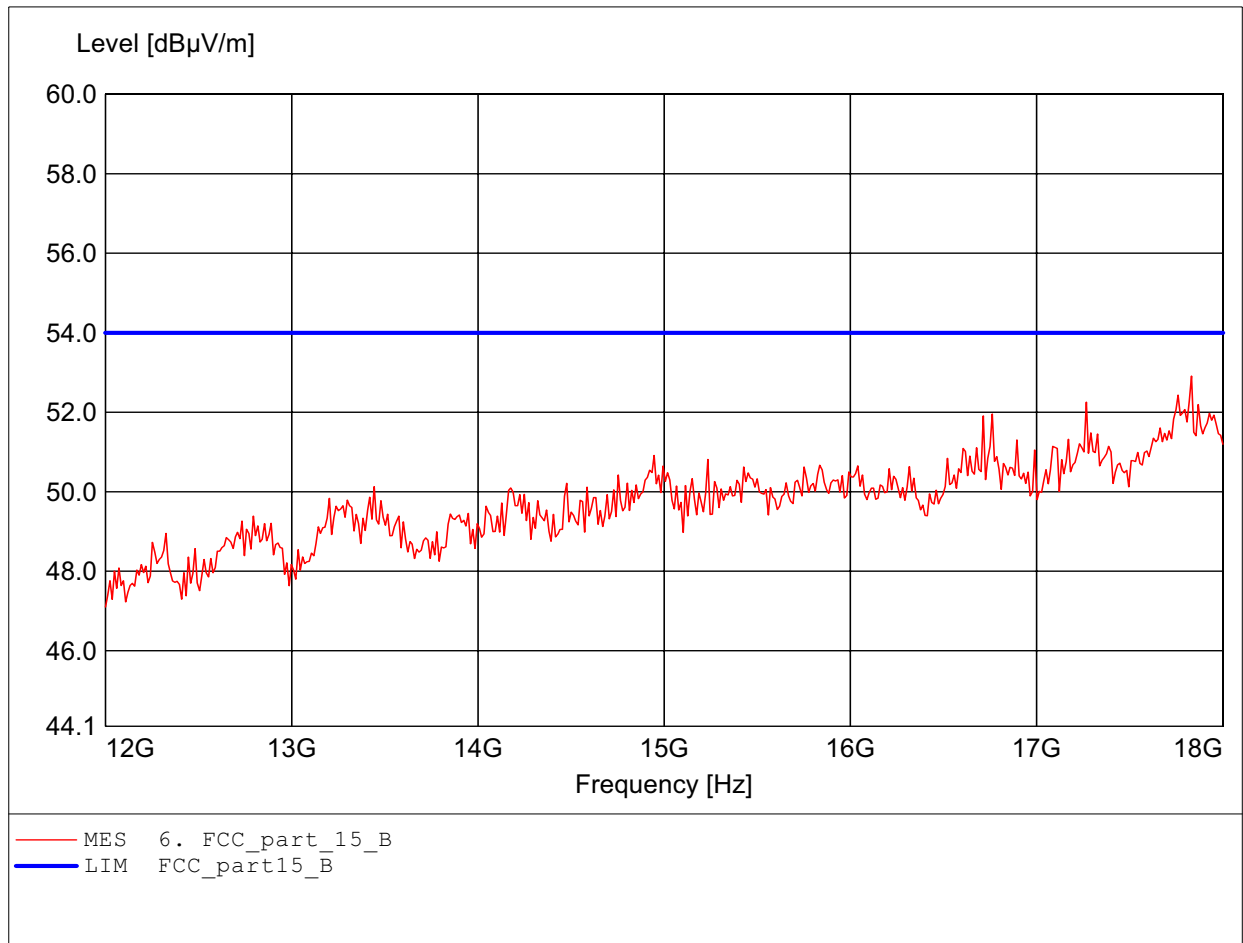

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:17.808GHz Emax:52.62dBμV/m RBW: 1 MHz

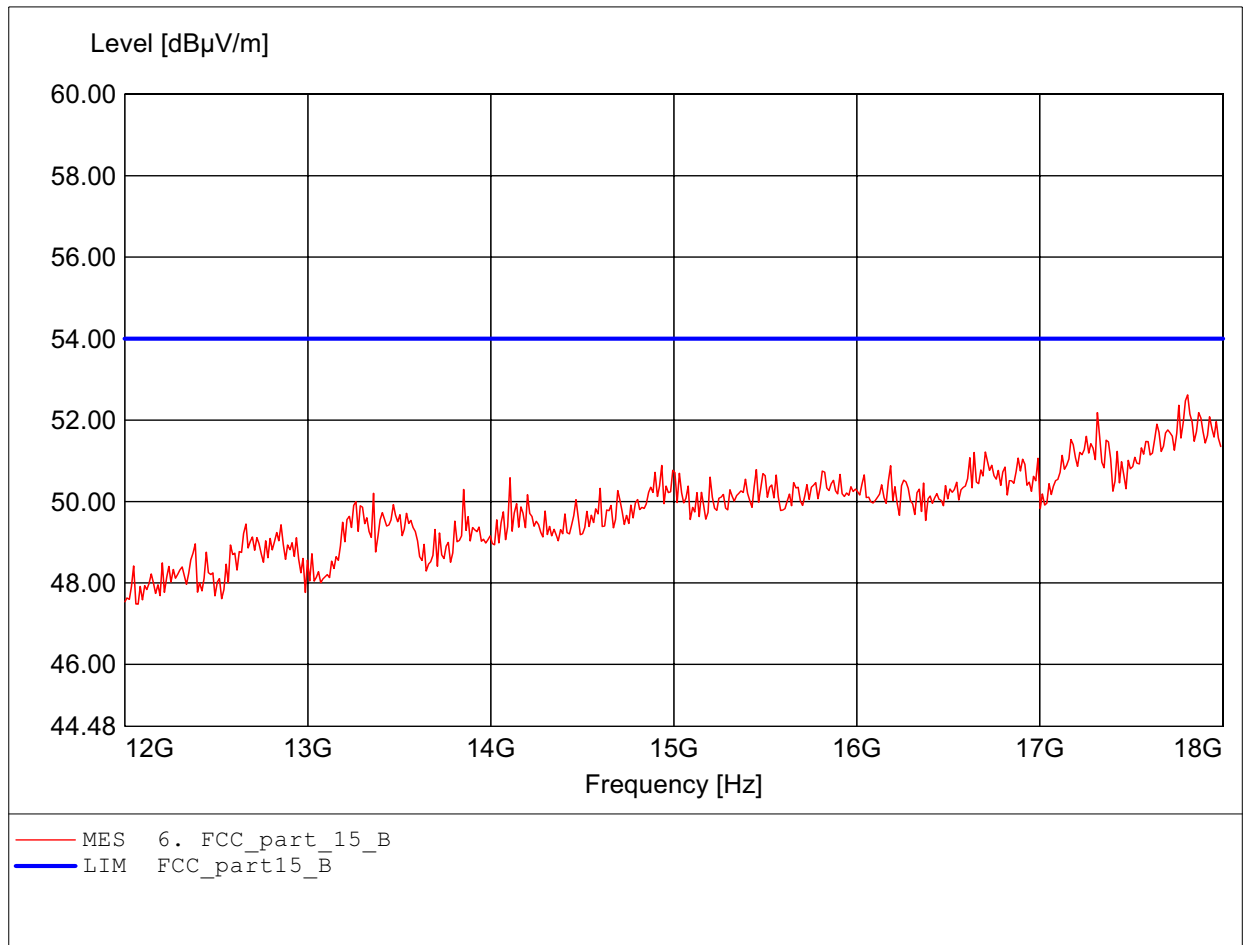

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HK 116
Freq:120.962MHz Emax:26.25dBµV/m RBW: 100 kHz

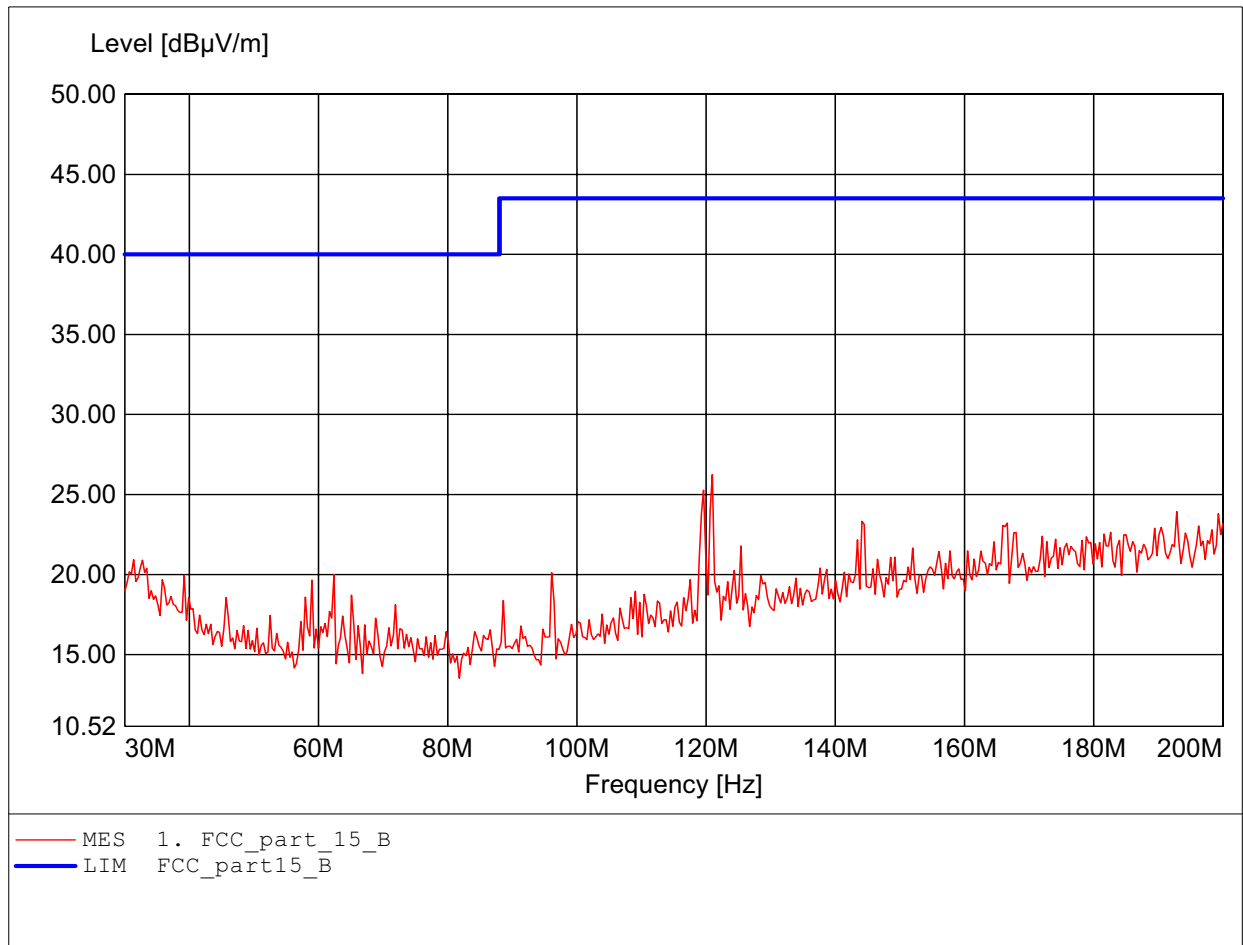

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HK 116
Freq:88.597MHz Emax:29.28dBµV/m RBW: 100 kHz

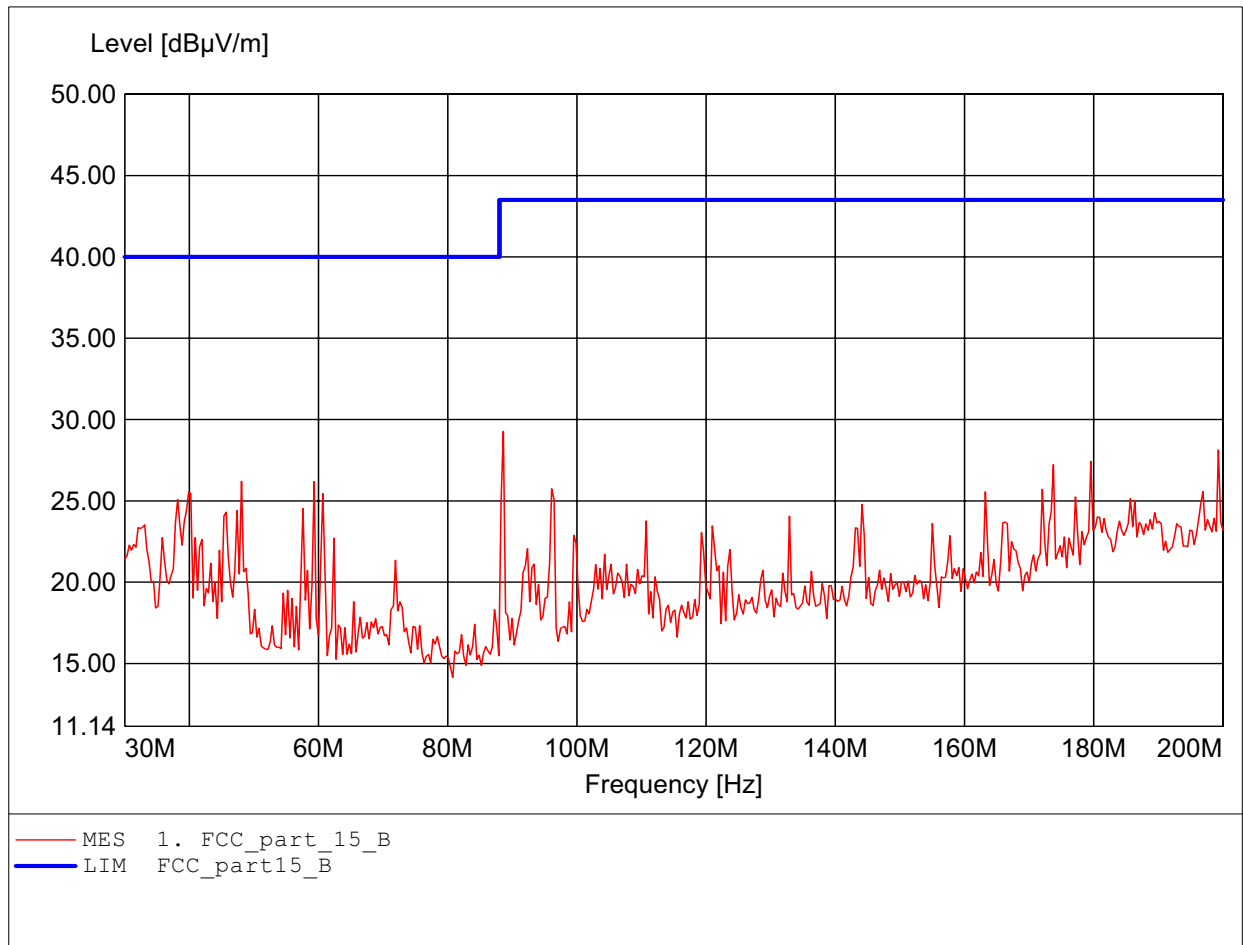

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL 223, ampl.
Freq:240.080MHz Emax:37.89dBµV/m RBW: 100 kHz

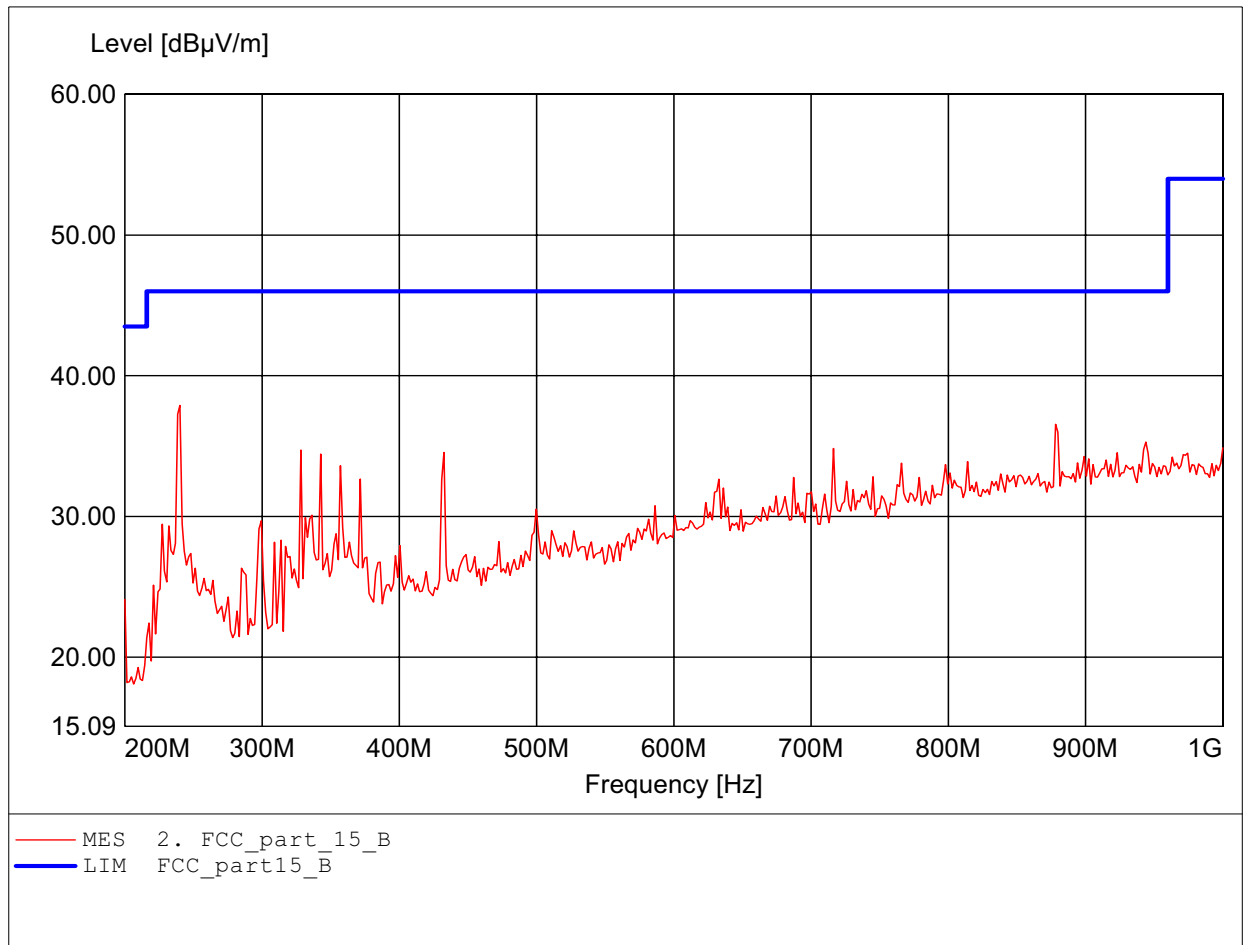

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL 223, ampl.
Freq:799.599MHz Emax:36.89dBµV/m RBW: 100 kHz

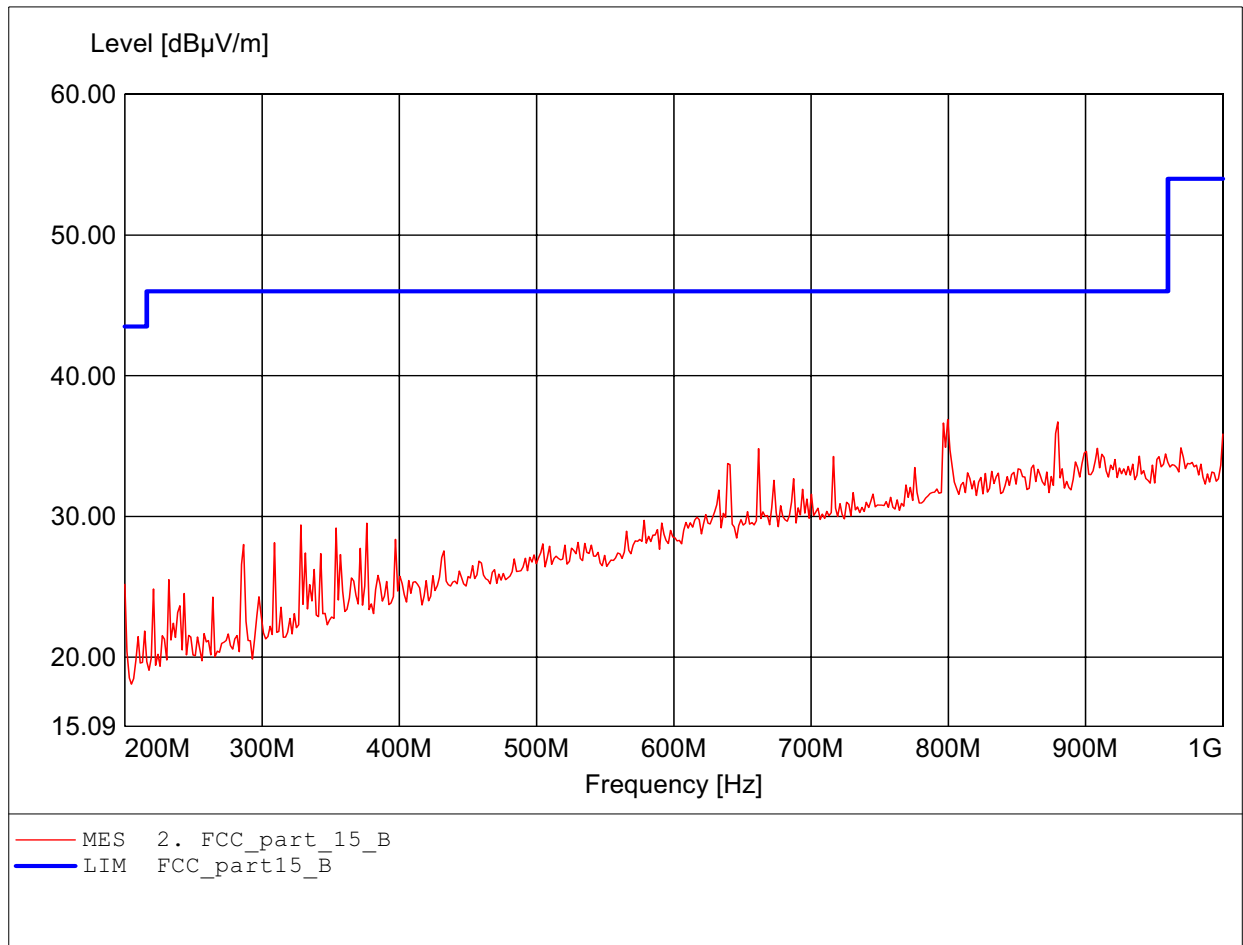

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:3.285GHz Emax:36.62dBμV/m RBW: 1 MHz

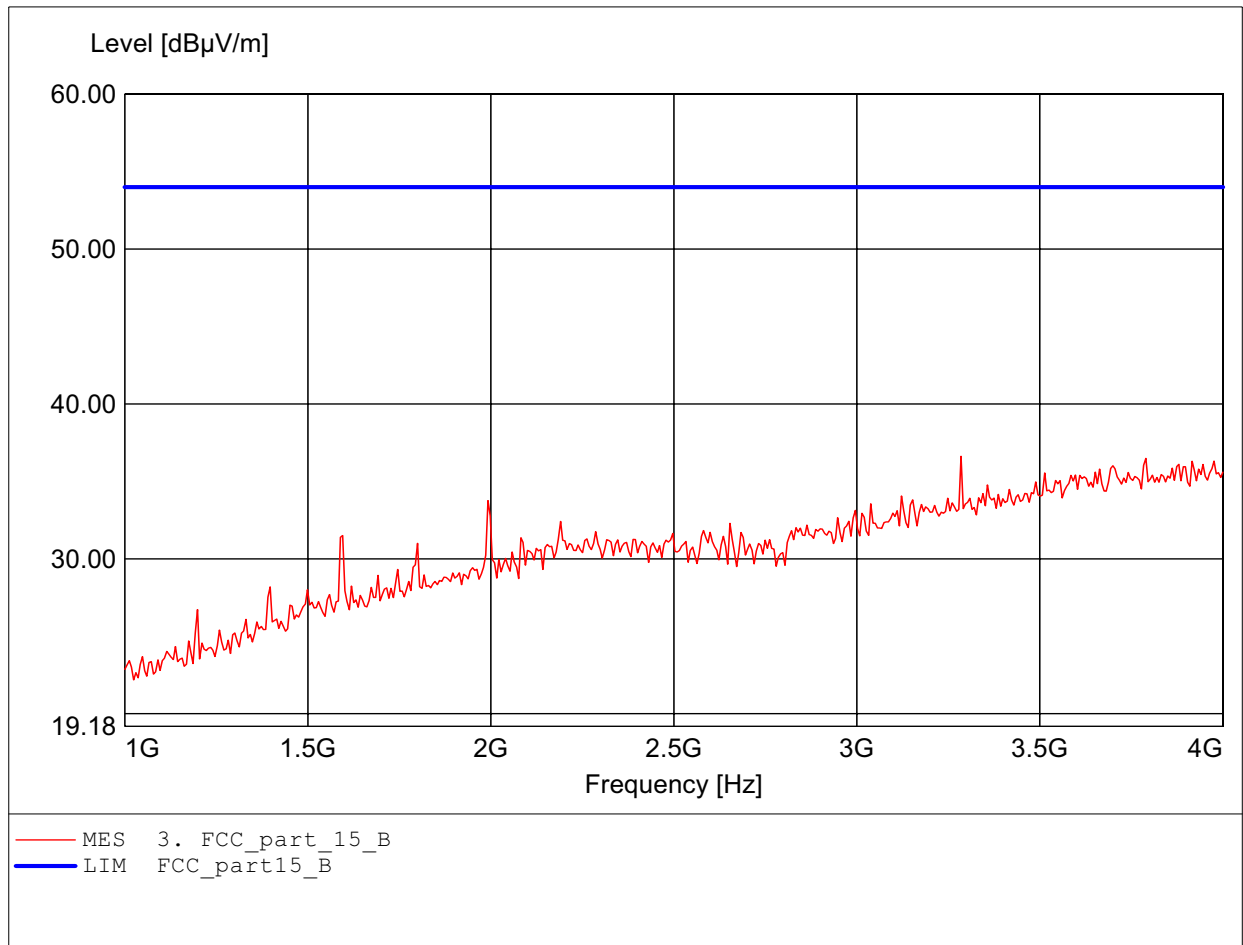

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:3.285GHz Emax:41.23dBμV/m RBW: 1 MHz

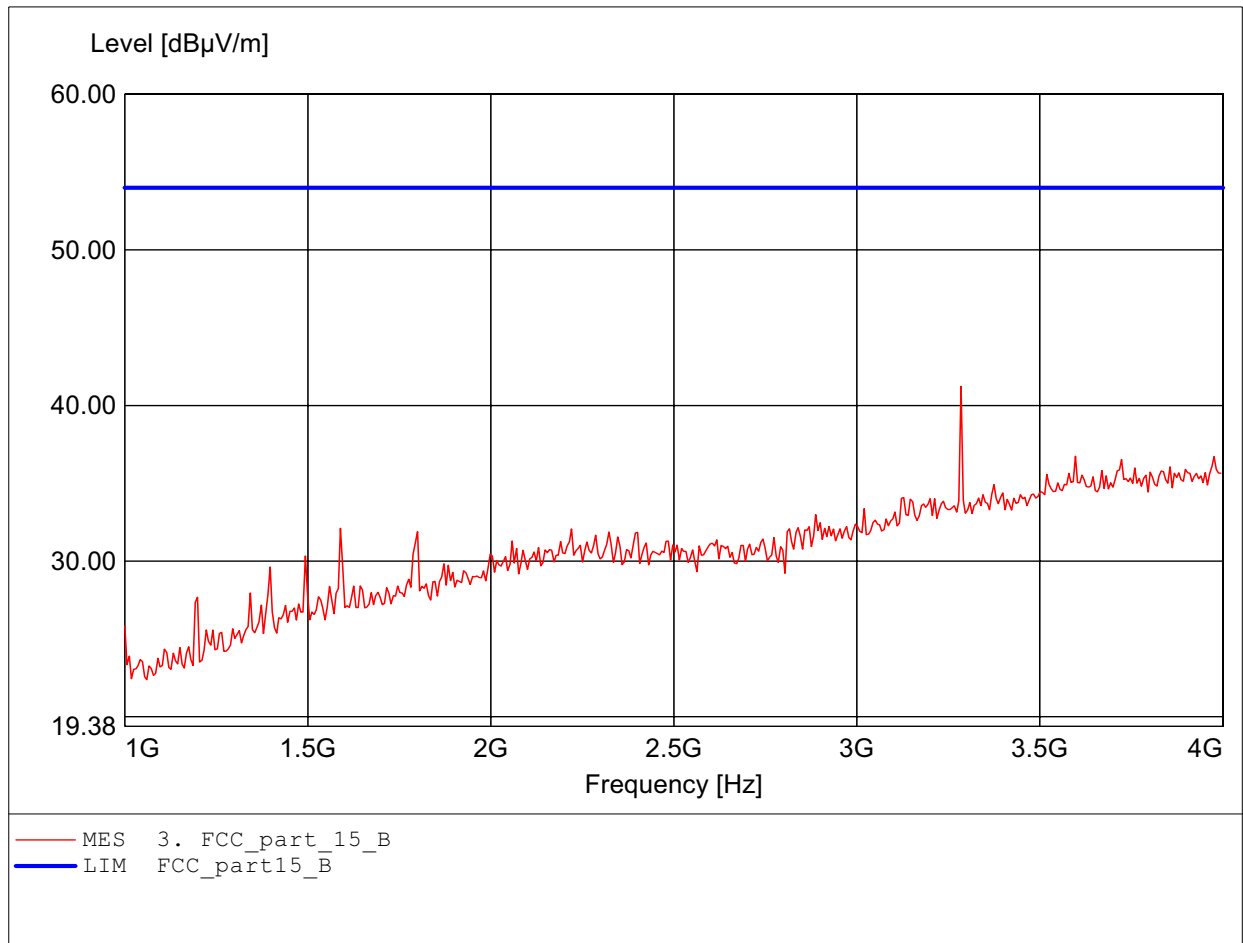

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:7.631GHz Emax:46.26dBμV/m RBW: 1 MHz

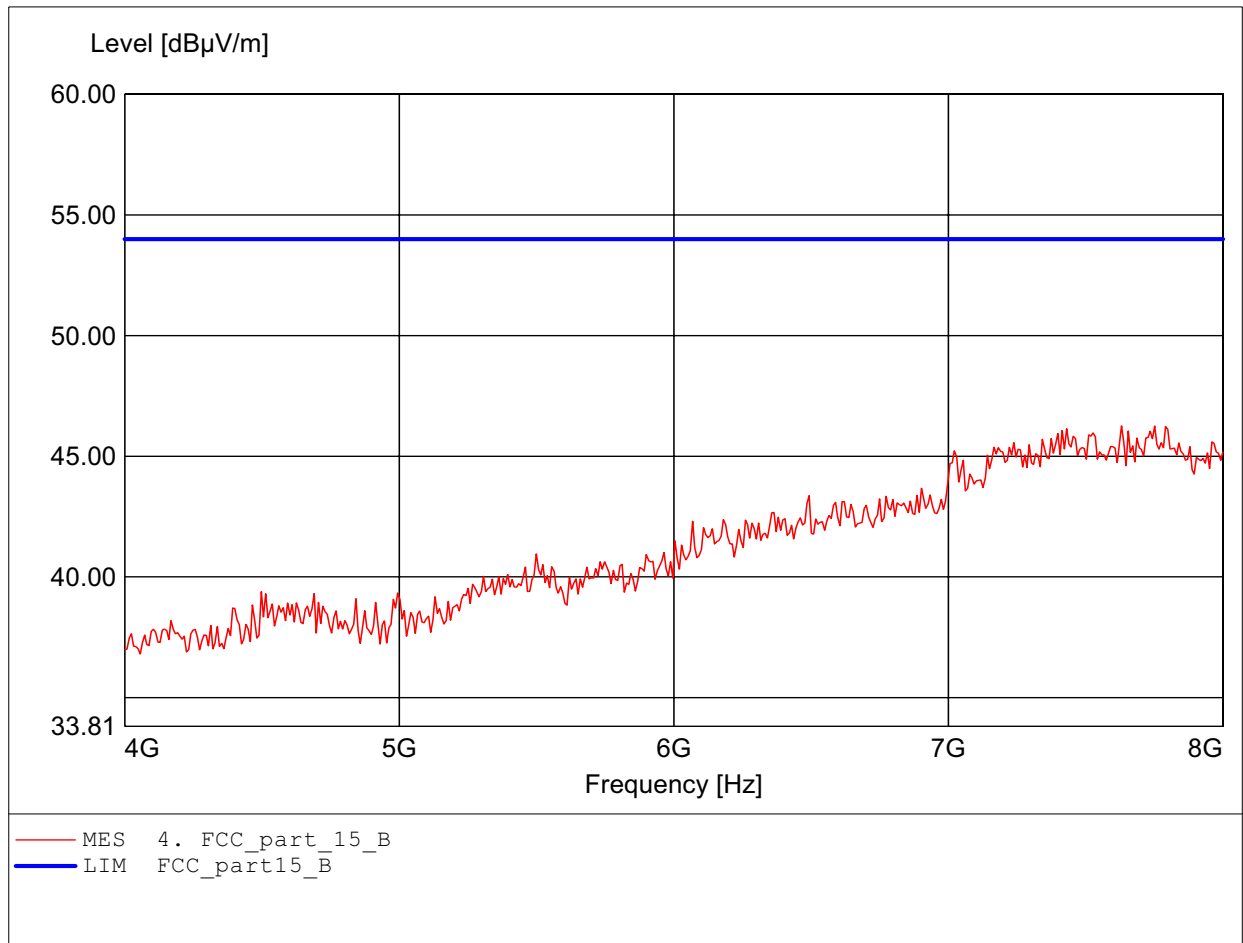

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:7.743GHz Emax:46.41dBμV/m RBW: 1 MHz

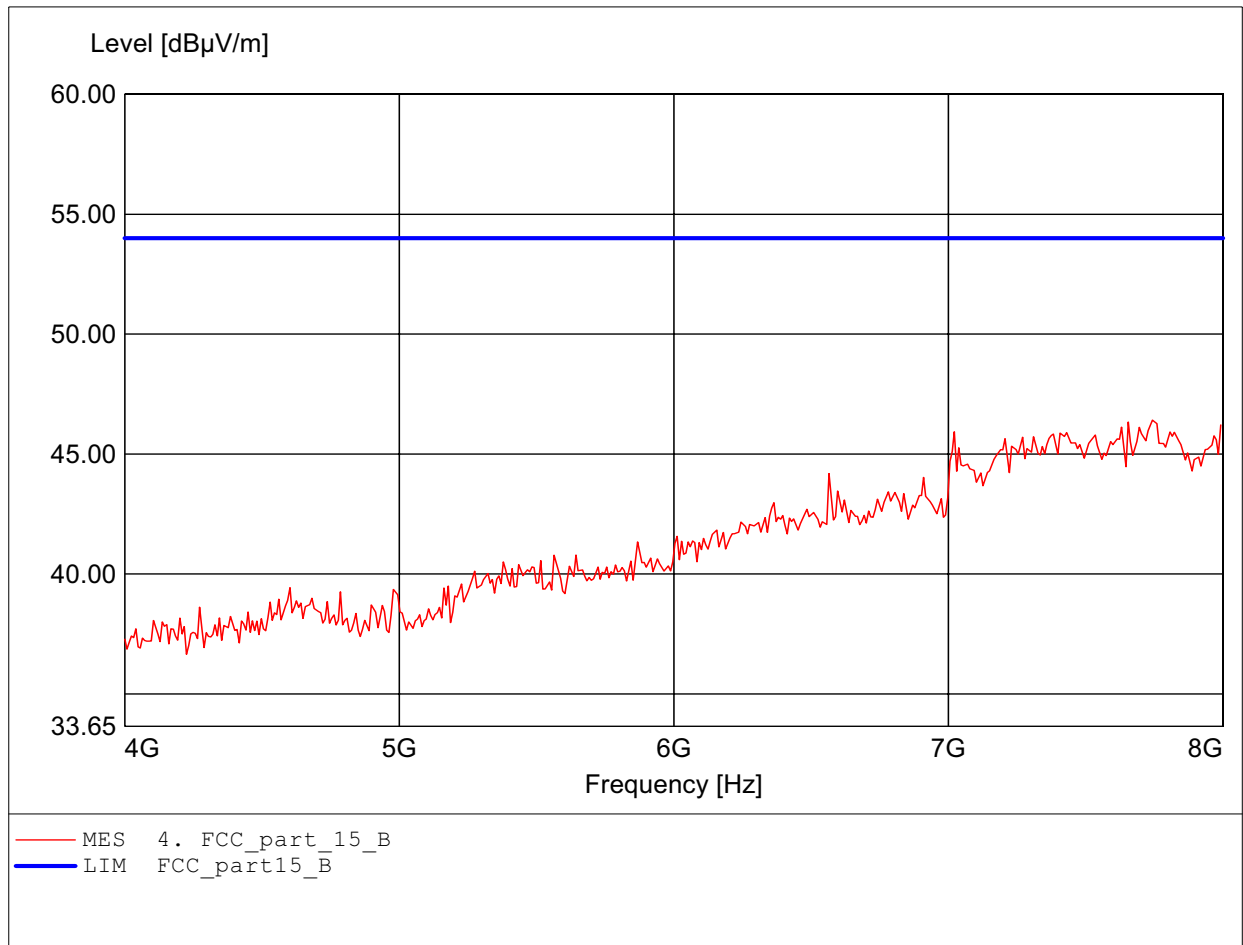

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:11.992GHz Emax:51.13dBμV/m RBW: 1 MHz

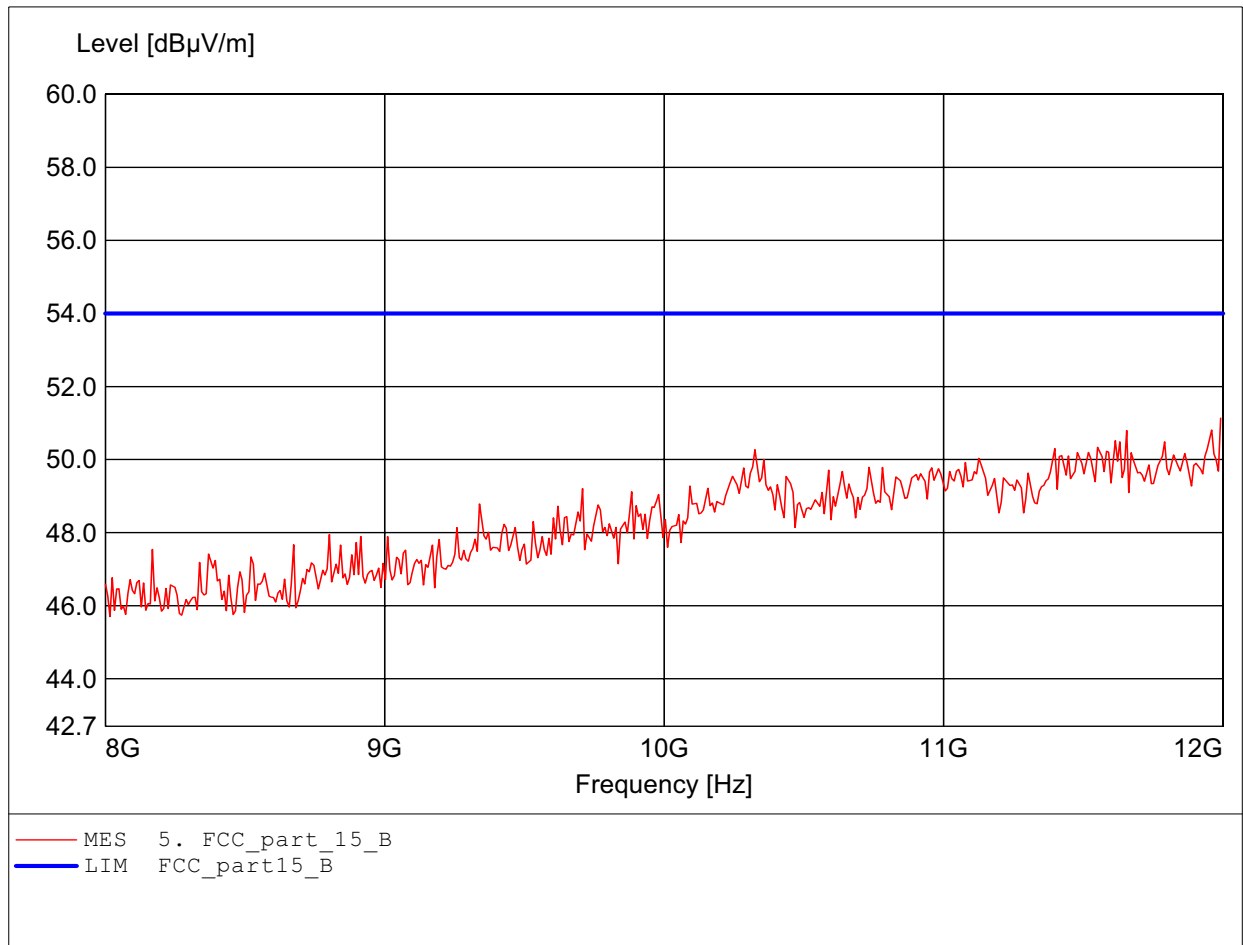

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:11.655GHz Emax:51.29dBμV/m RBW: 1 MHz

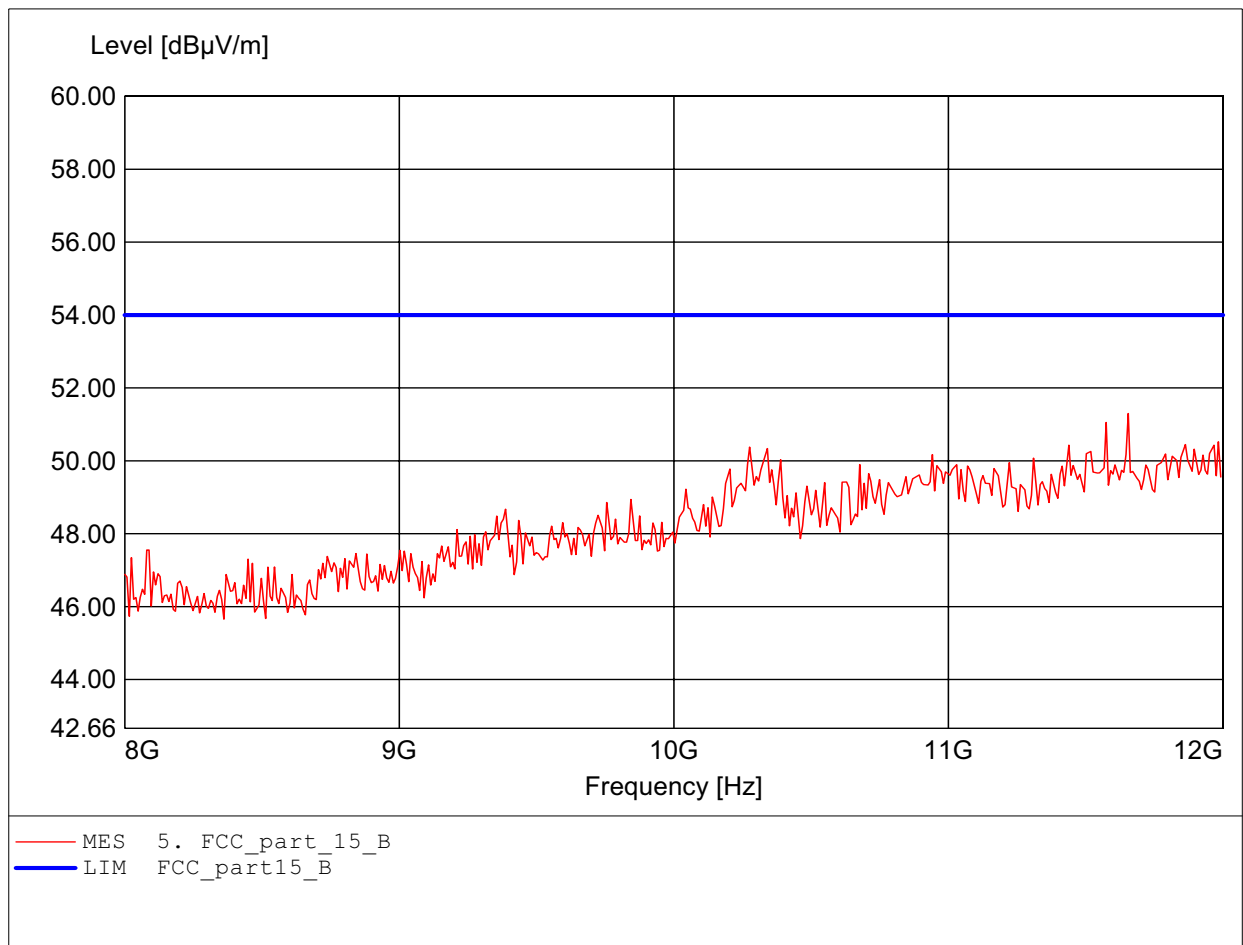

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:17.844GHz Emax:52.66dBμV/m RBW: 1 MHz

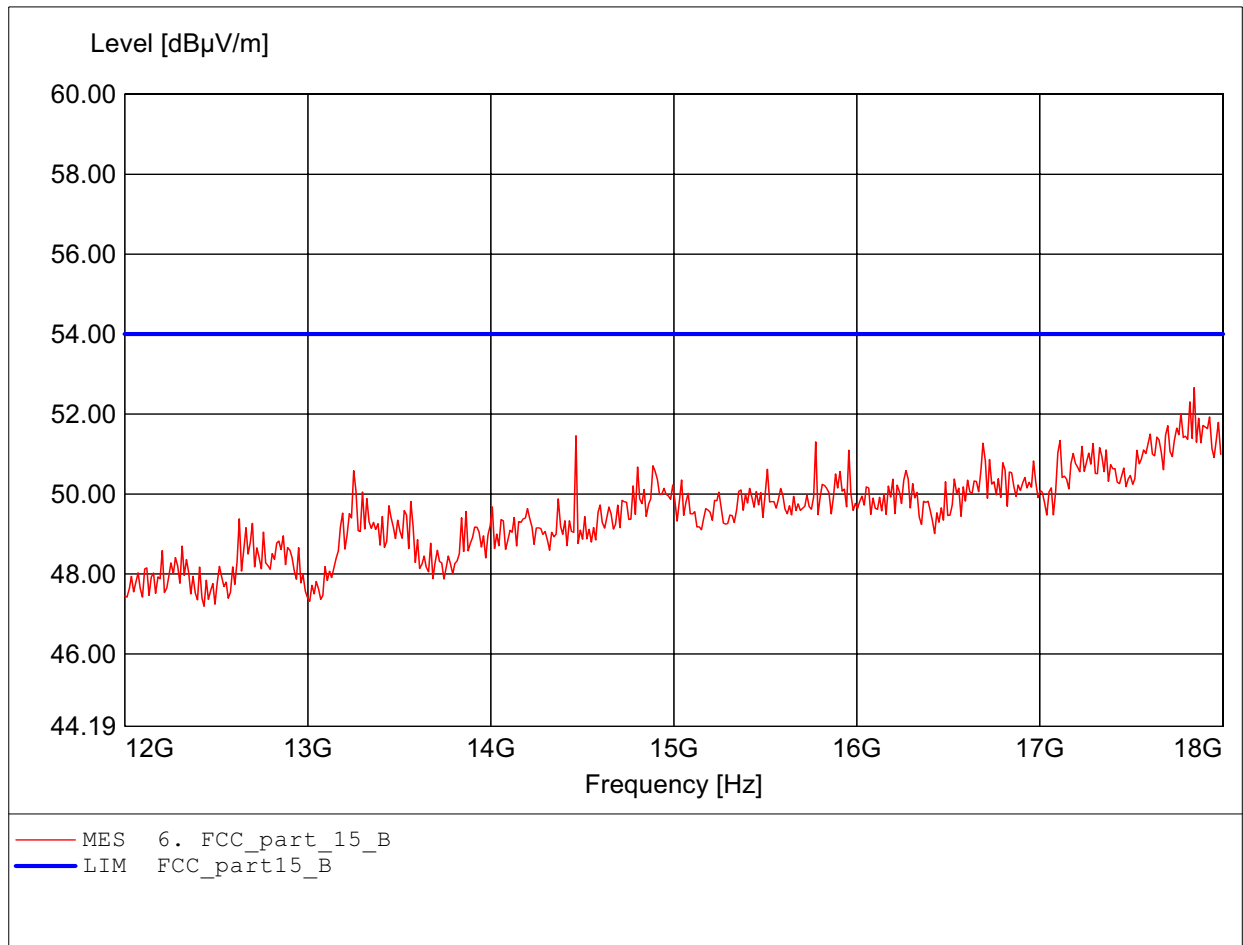

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11b ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:17.880GHz Emax:52.73dBμV/m RBW: 1 MHz

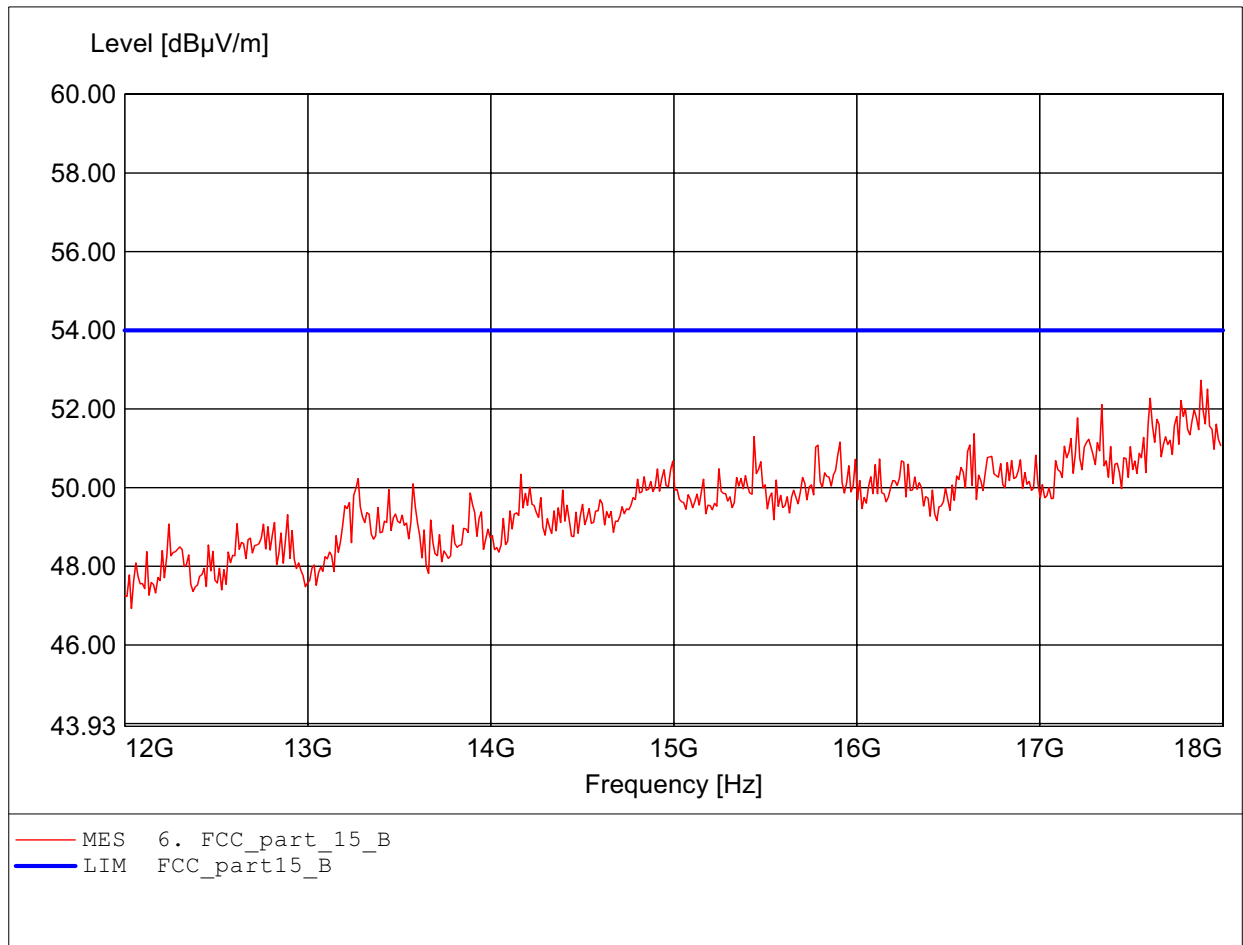

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HK 116
Freq:166.273MHz Emax:25.67dBµV/m RBW: 100 kHz

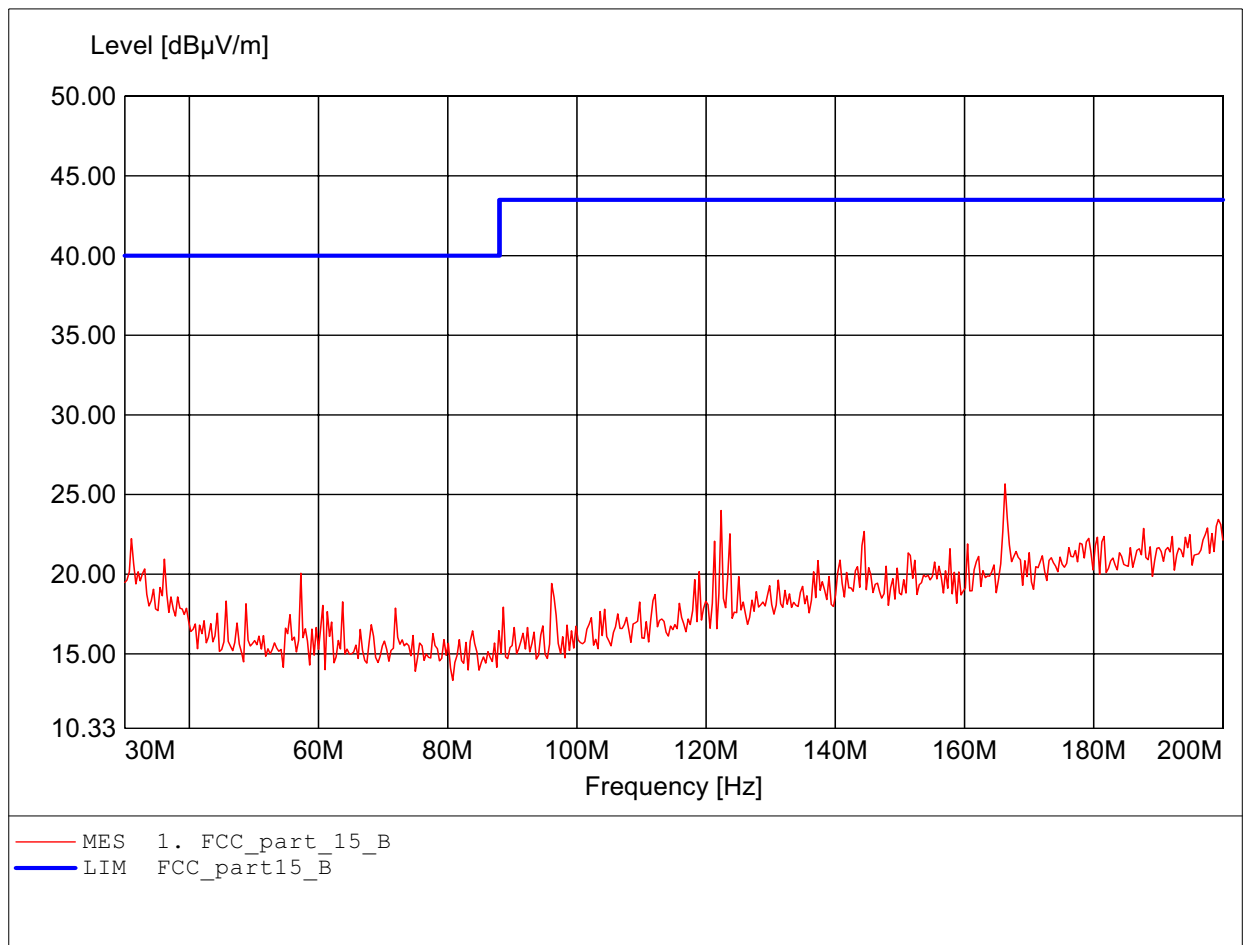

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HK 116
Freq:88.597MHz Emax:29.46dBµV/m RBW: 100 kHz

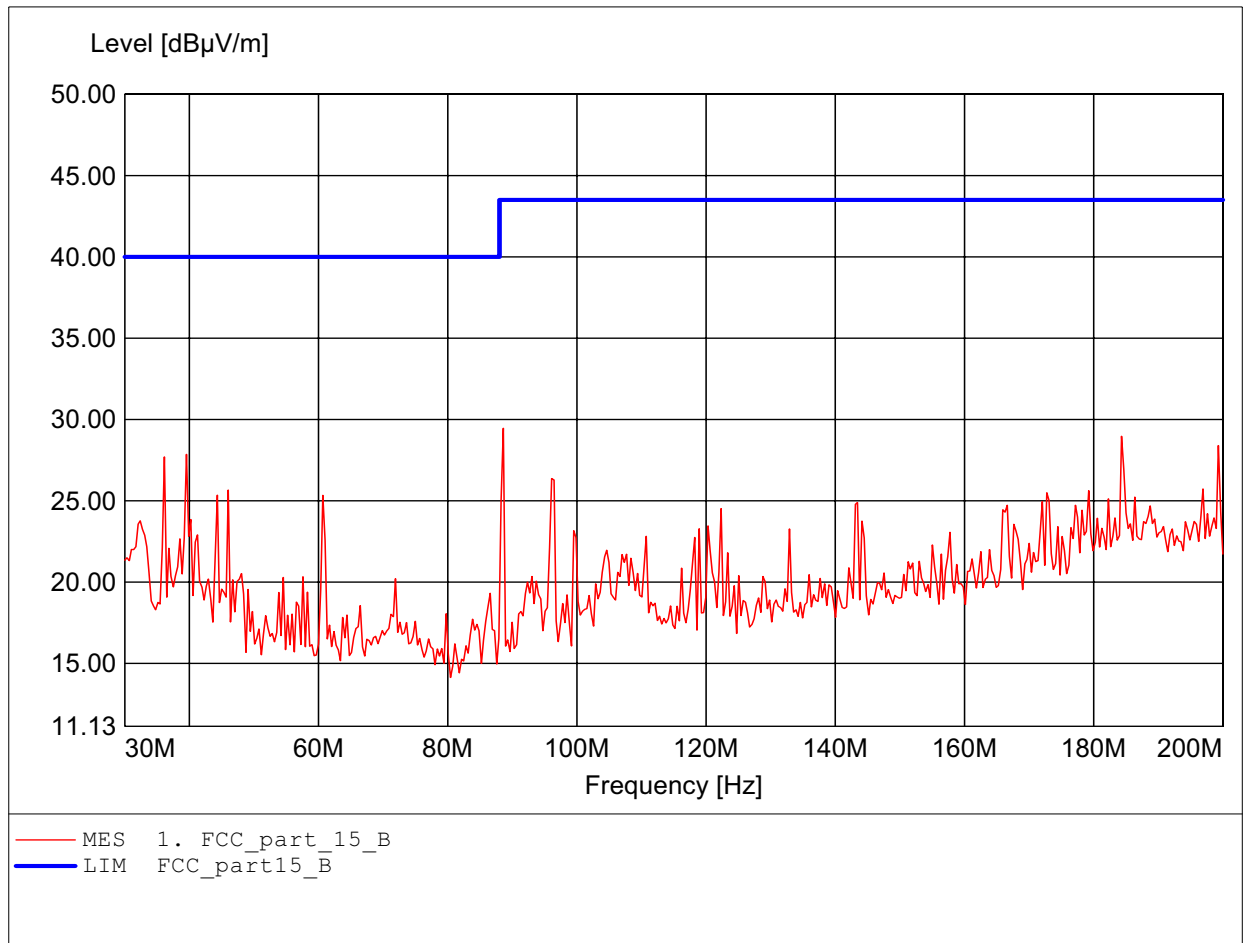

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL 223, ampl.
Freq:998.397MHz Emax:38.09dBµV/m RBW: 100 kHz

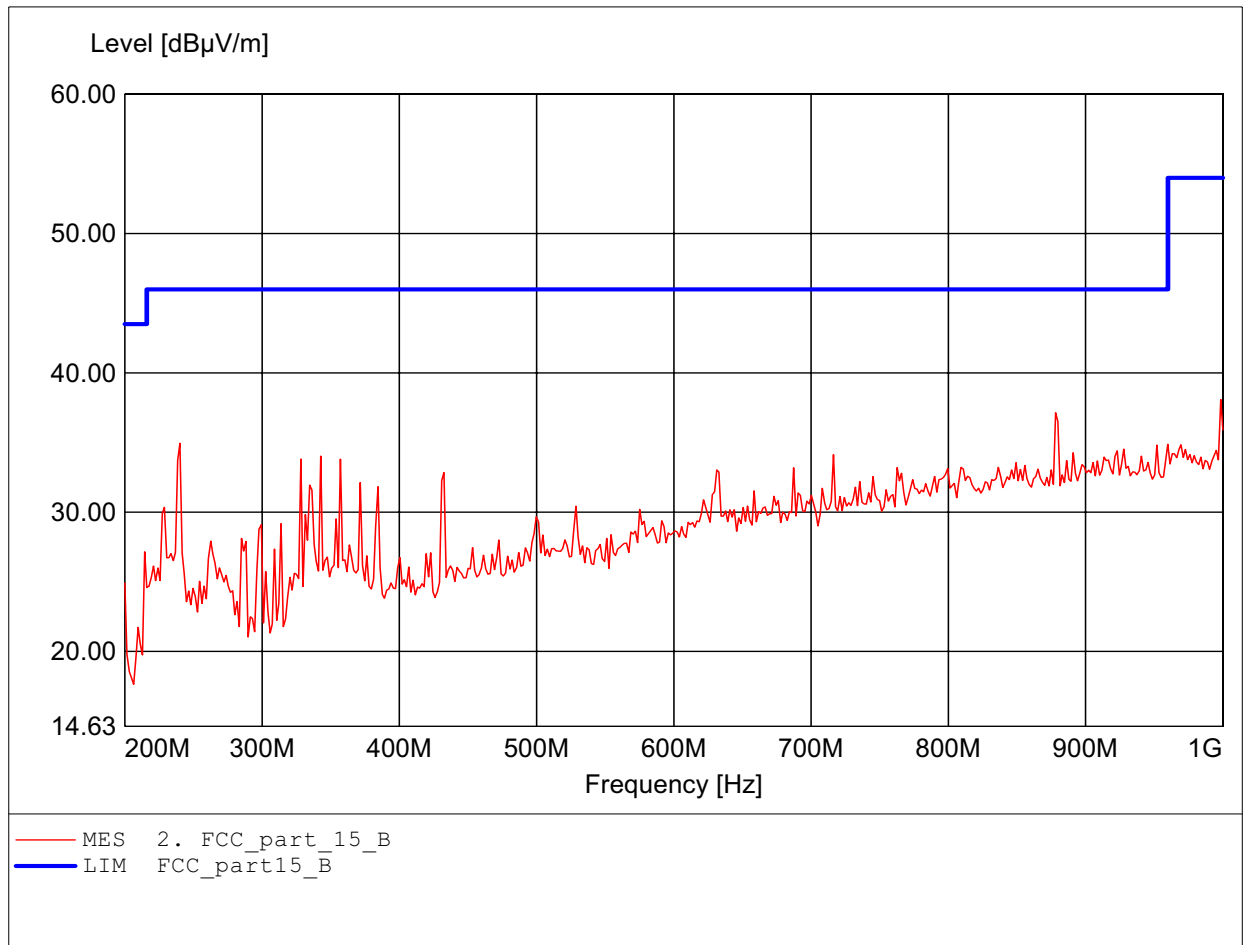

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL 223, ampl.
Freq:799.599MHz Emax:36.73dBµV/m RBW: 100 kHz

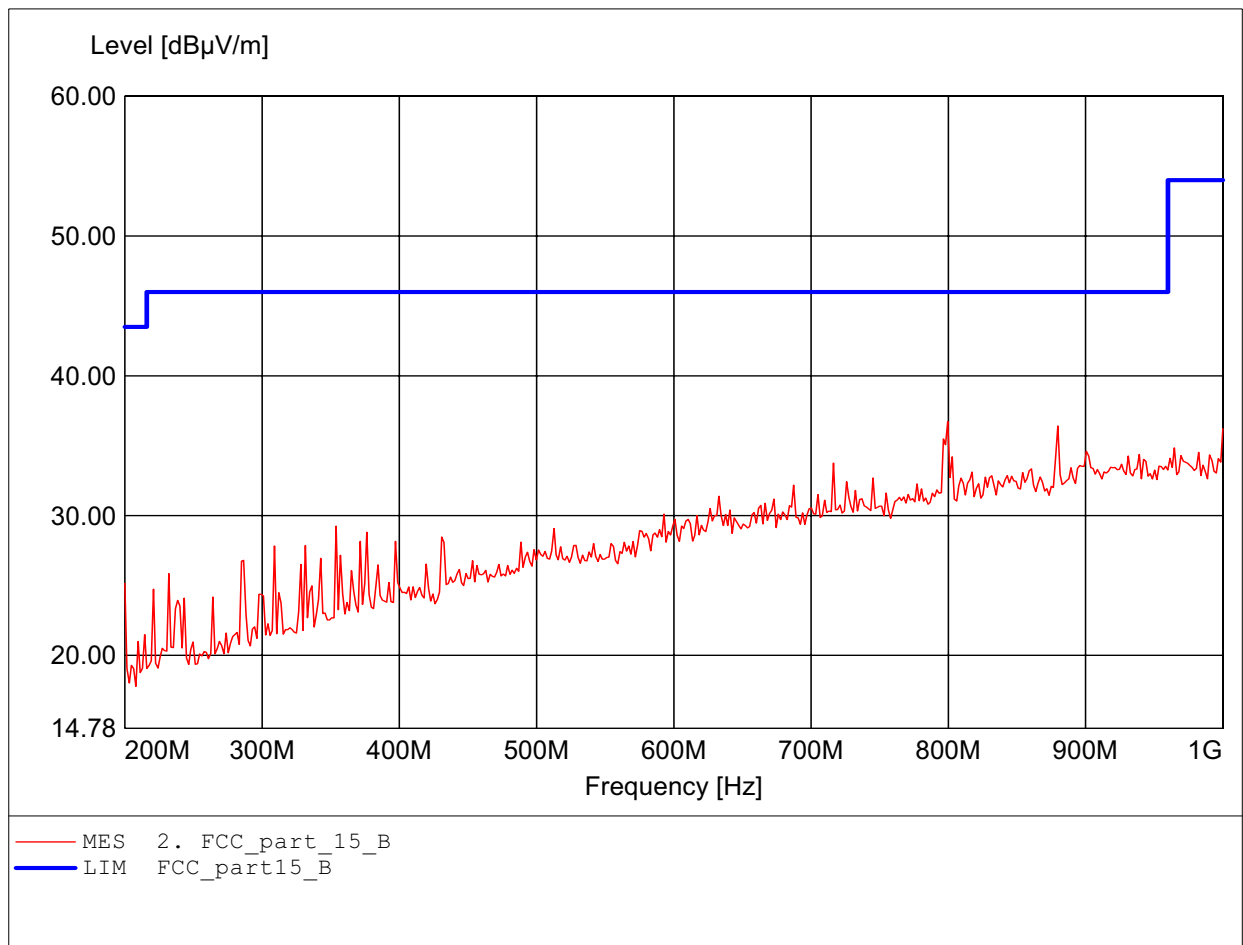

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:3.218GHz Emax:38.76dBμV/m RBW: 1 MHz

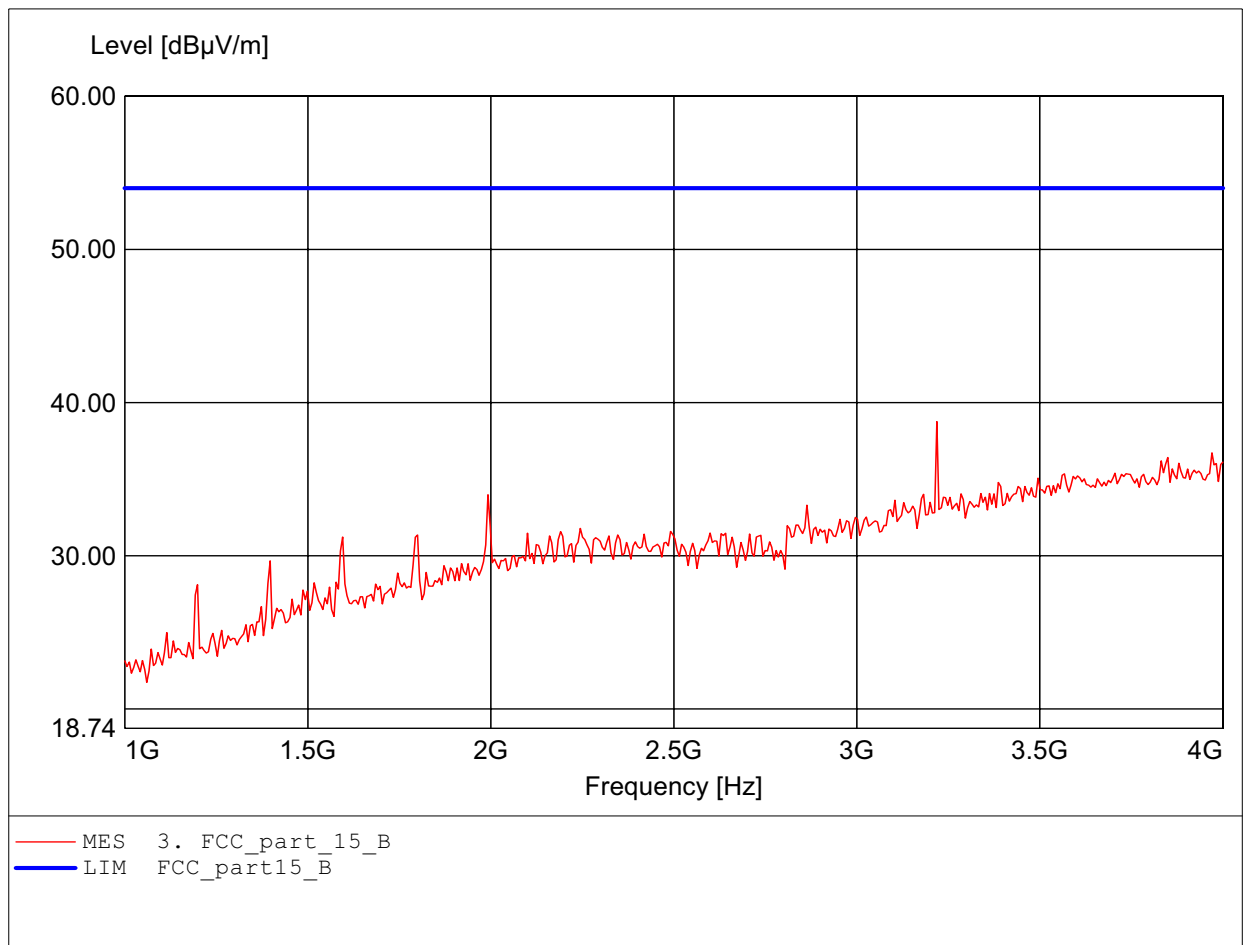

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:3.218GHz Emax:43.05dBμV/m RBW: 1 MHz

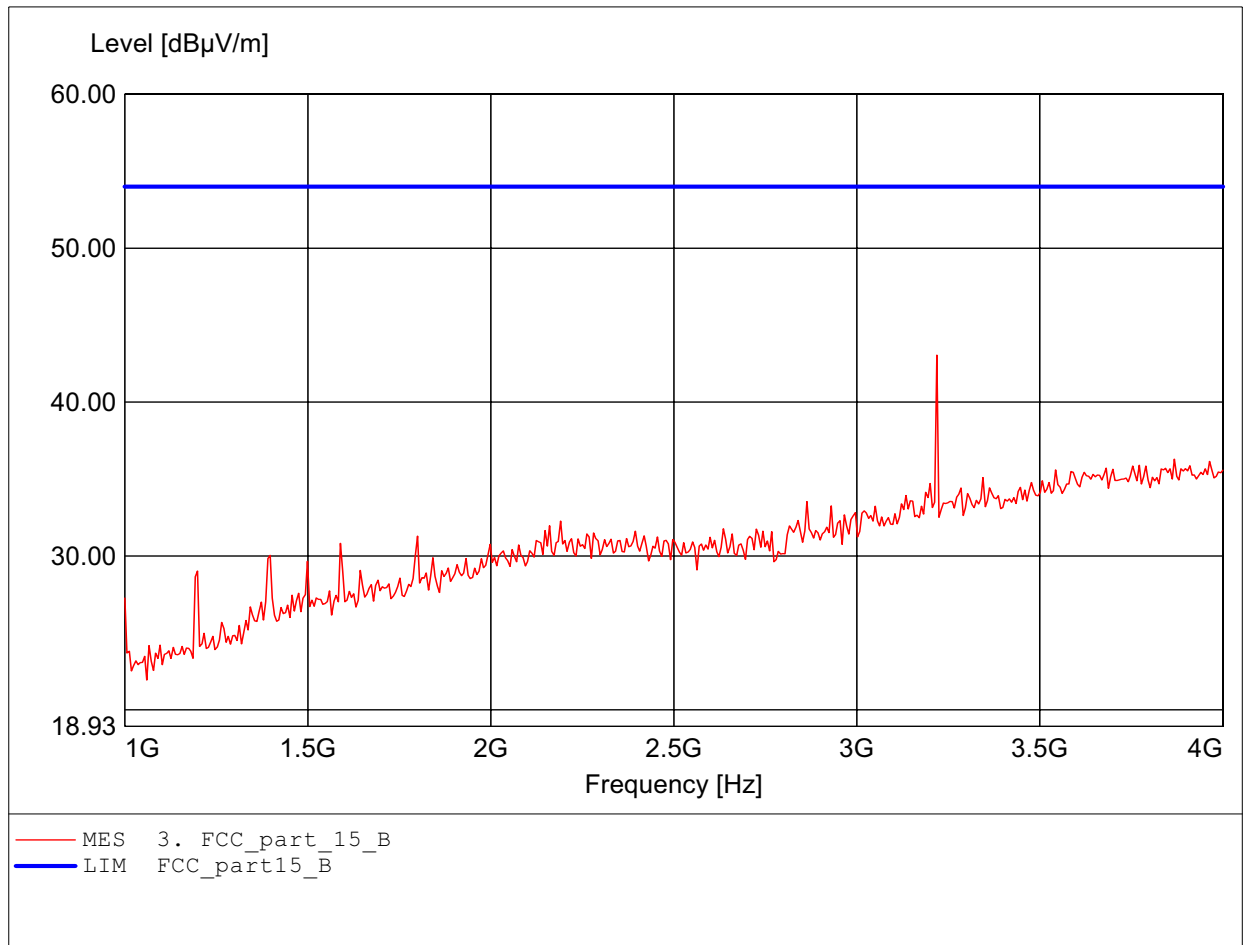

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:7.727GHz Emax:46.56dBμV/m RBW: 1 MHz

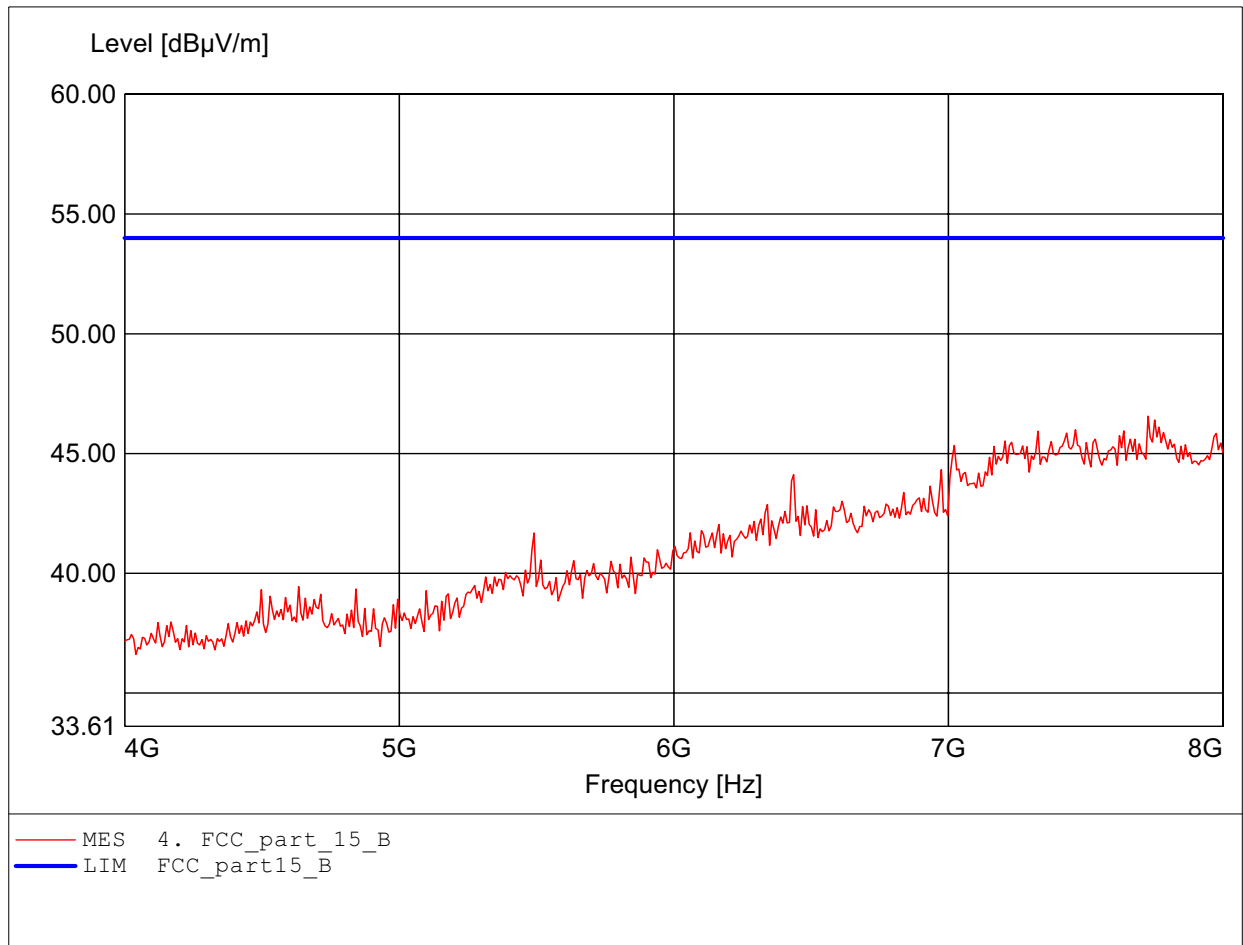

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:6.437GHz Emax:50.09dBμV/m RBW: 1 MHz

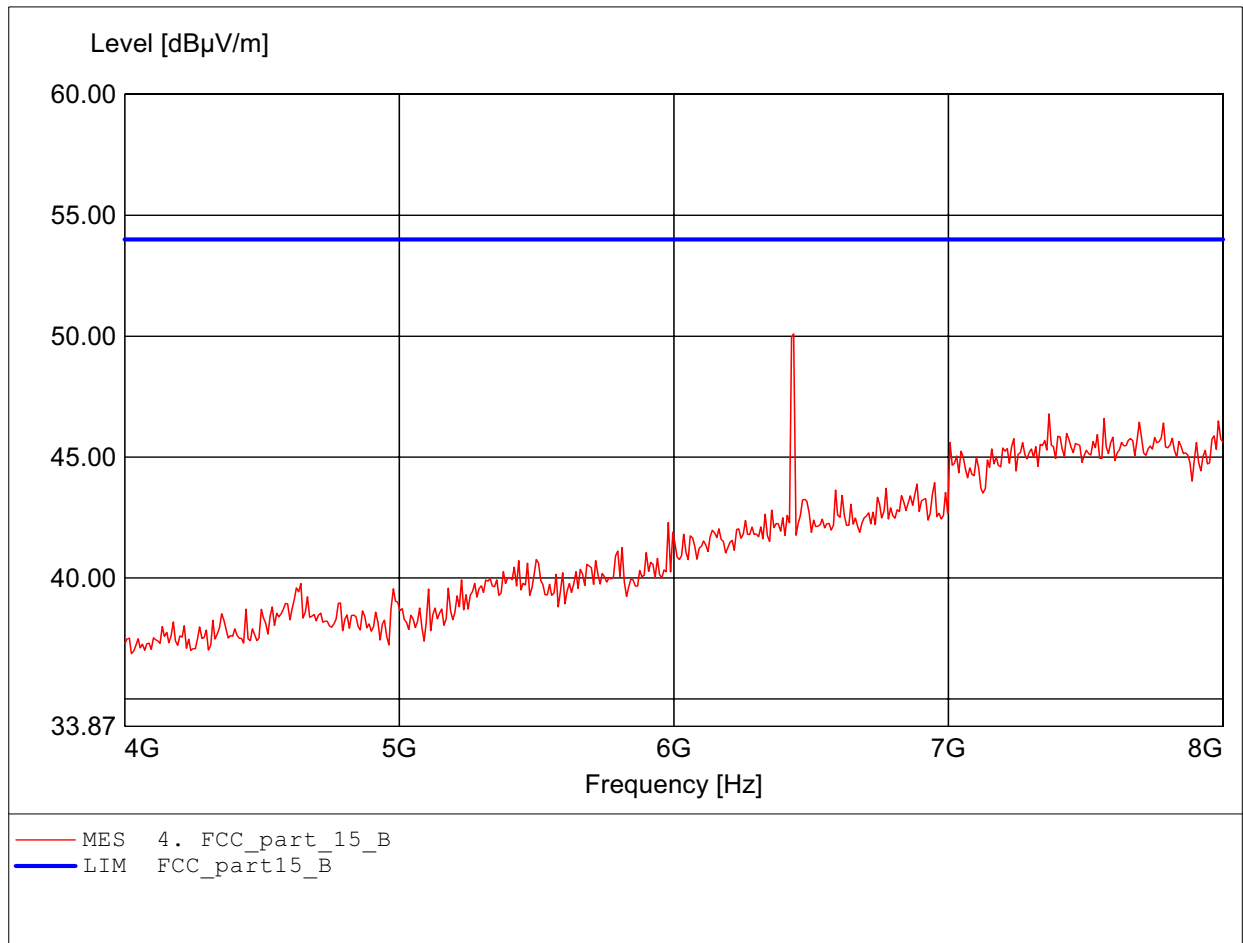

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:11.928GHz Emax:51.15dBµV/m RBW: 1 MHz

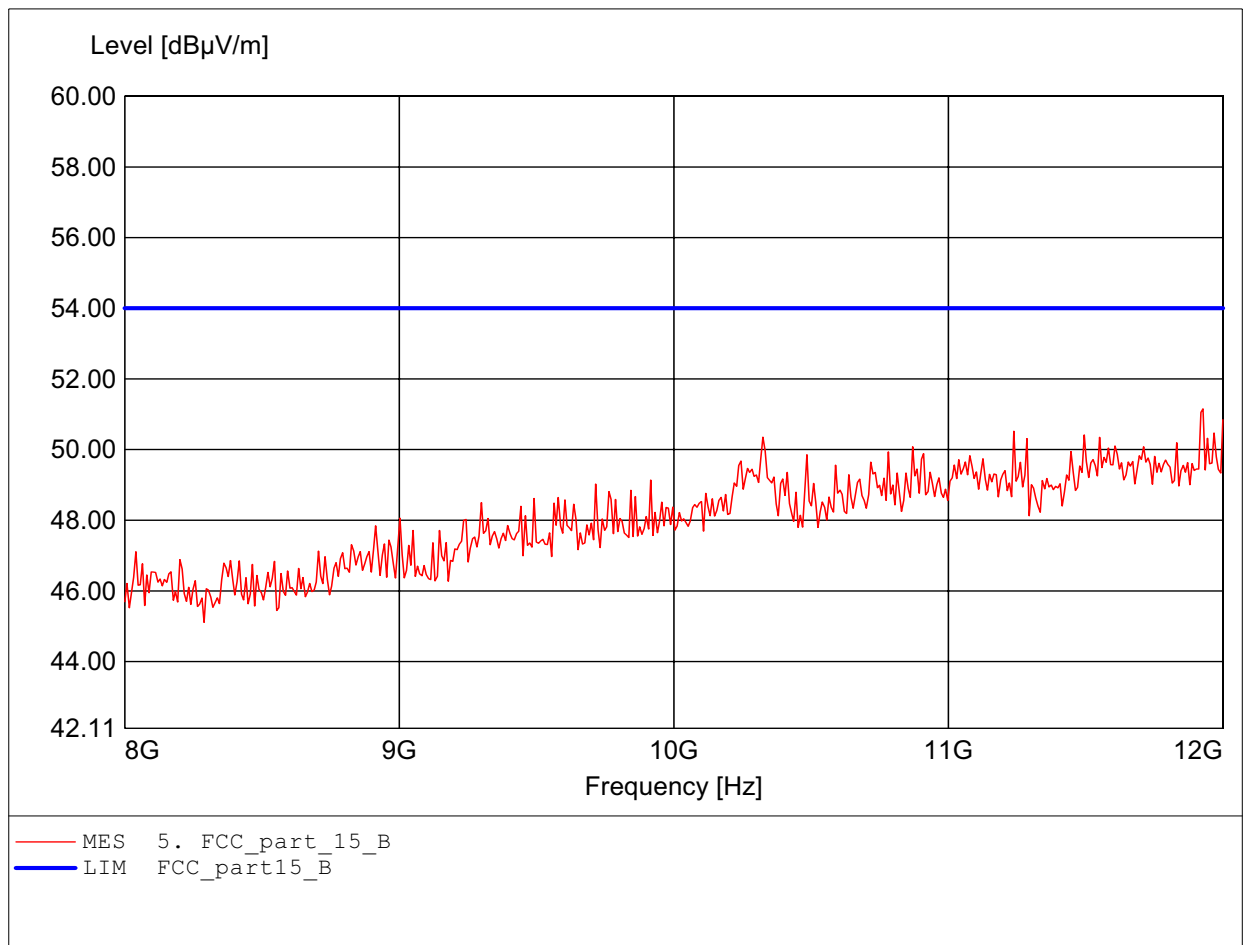

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:11.591GHz Emax:50.64dBµV/m RBW: 1 MHz

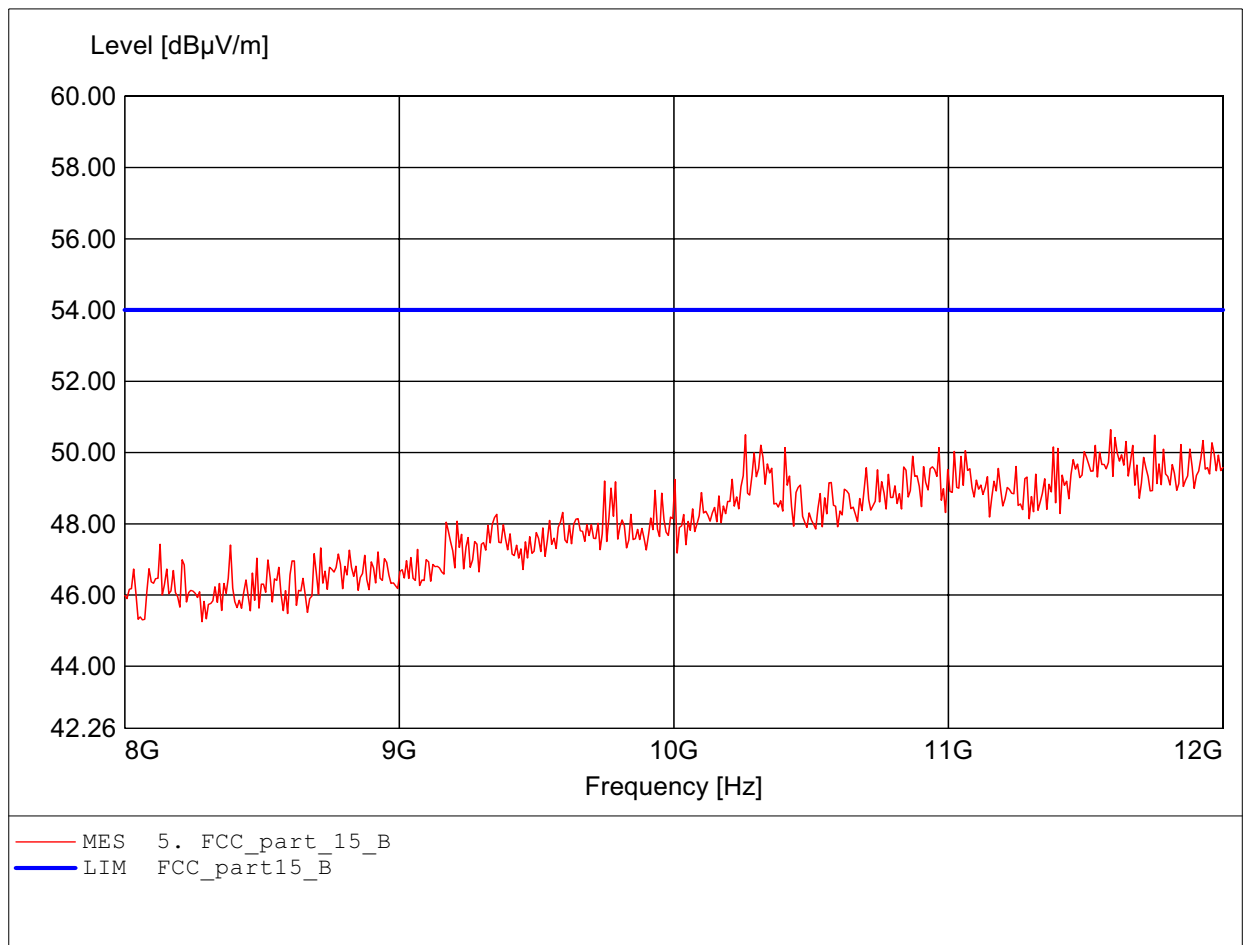

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:17.747GHz Emax:52.50dBμV/m RBW: 1 MHz

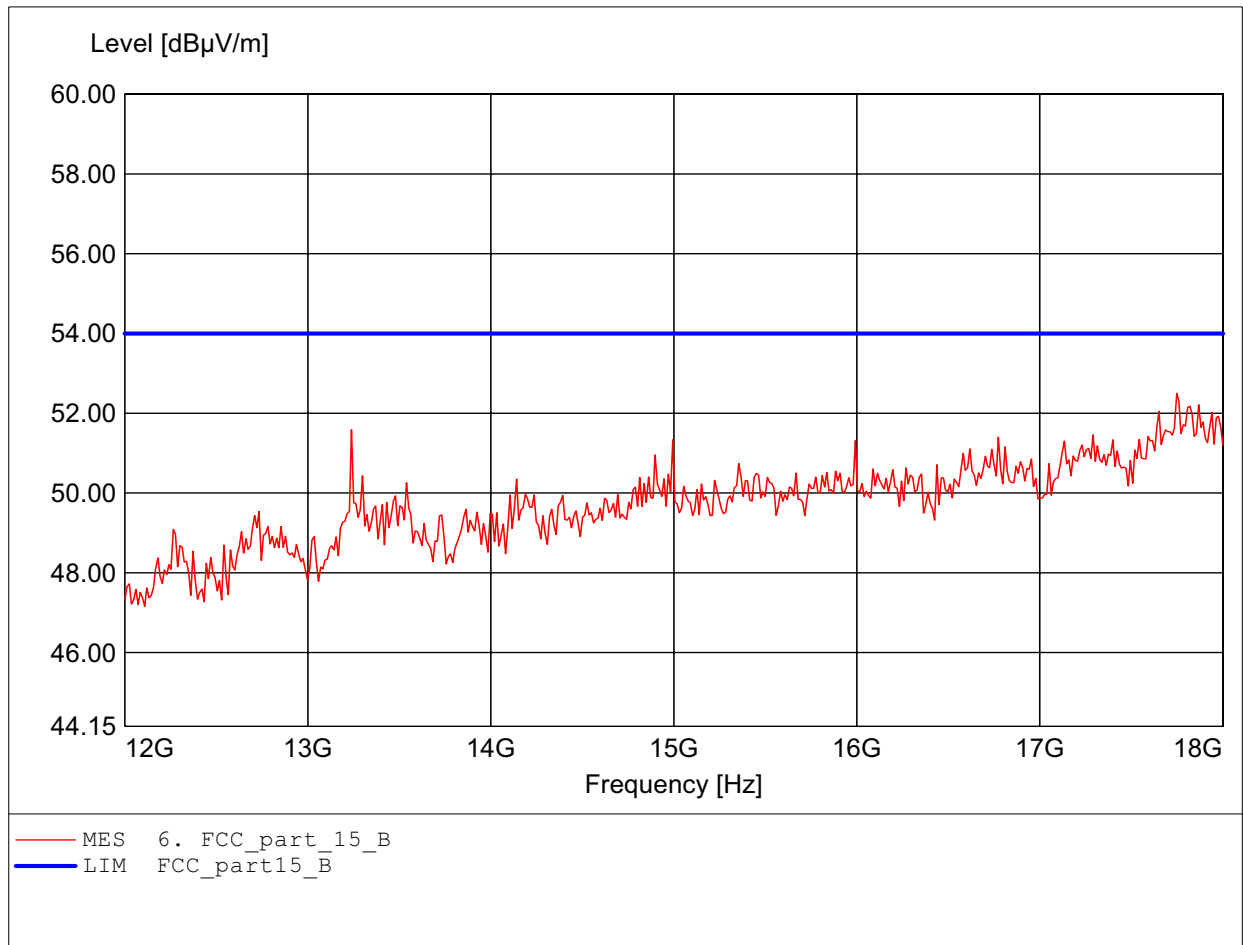

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch1
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:17.832GHz Emax:52.61dBµV/m RBW: 1 MHz

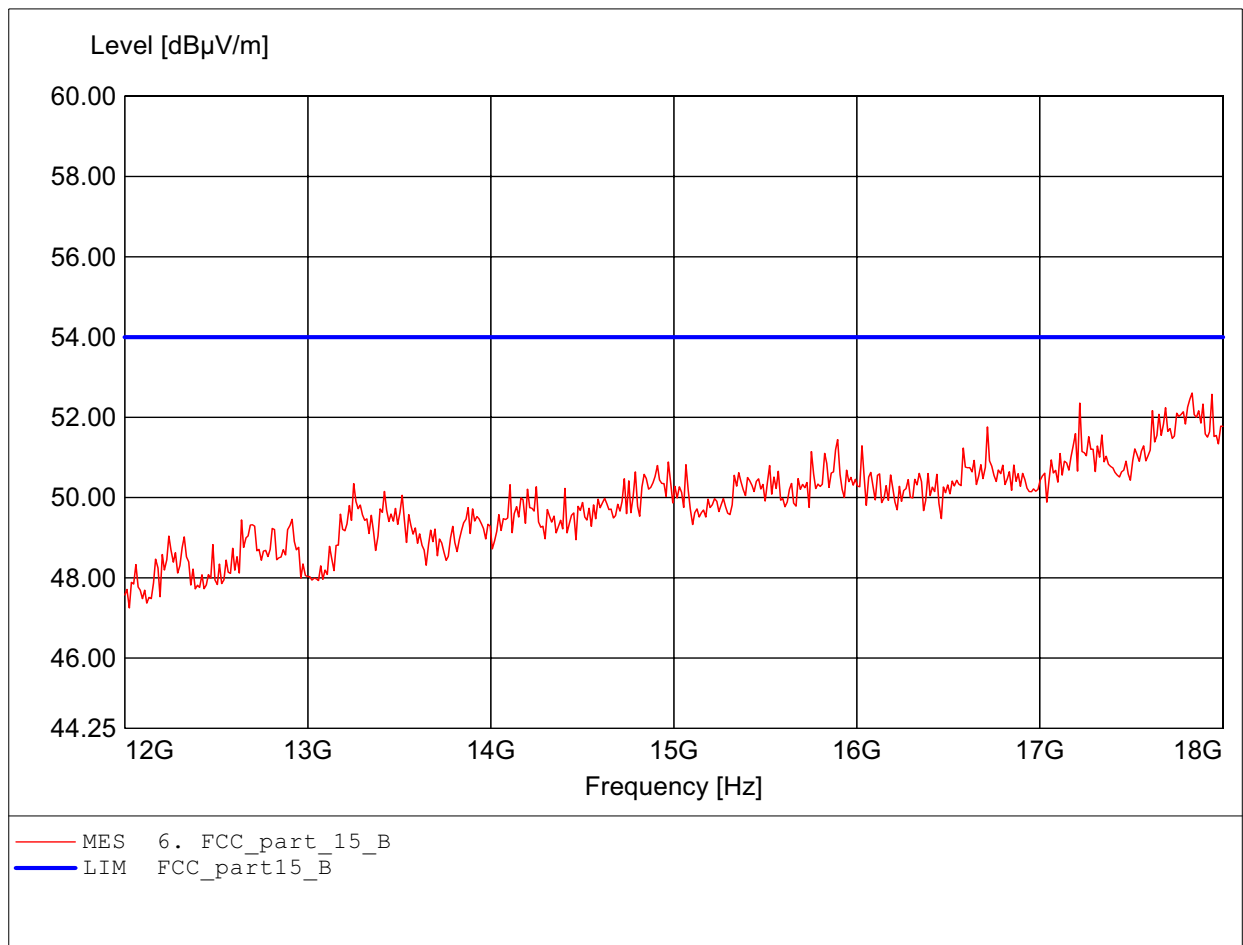

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HK 116
Freq:119.259MHz Emax:24.89dBµV/m RBW: 100 kHz

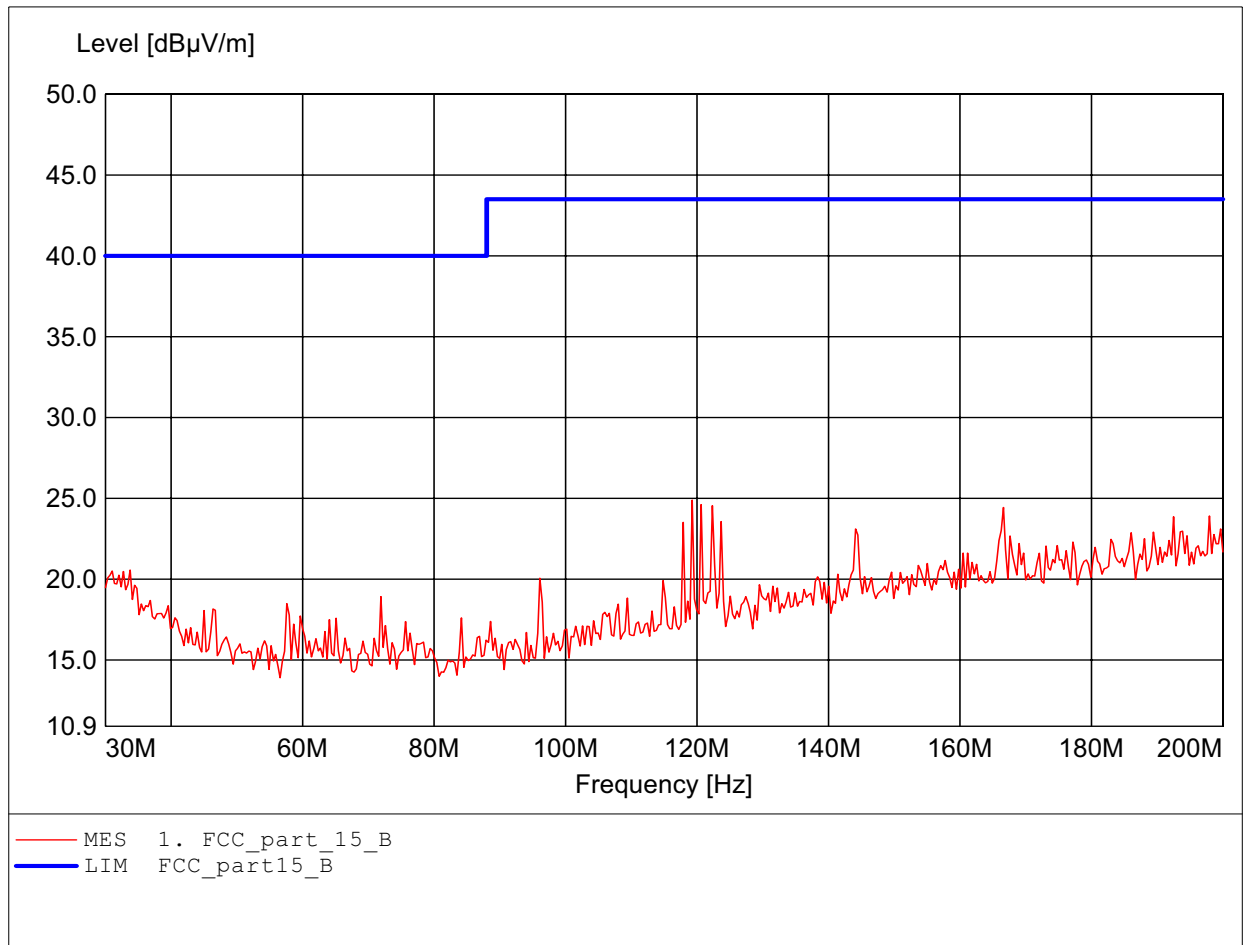

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HK 116
Freq:88.597MHz Emax:30.03dBµV/m RBW: 100 kHz

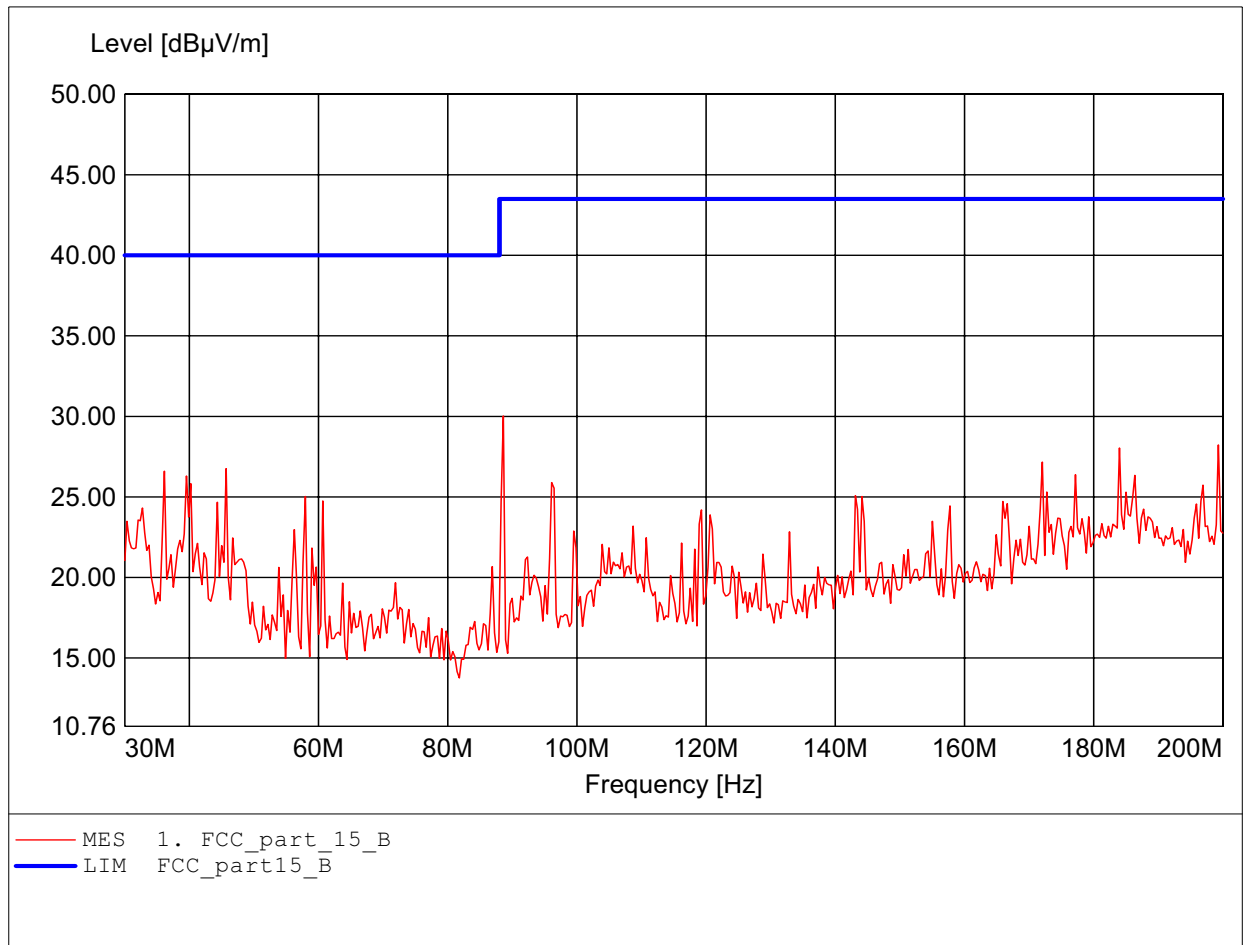

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL 223, ampl.
Freq:879.760MHz Emax:38.91dBµV/m RBW: 100 kHz

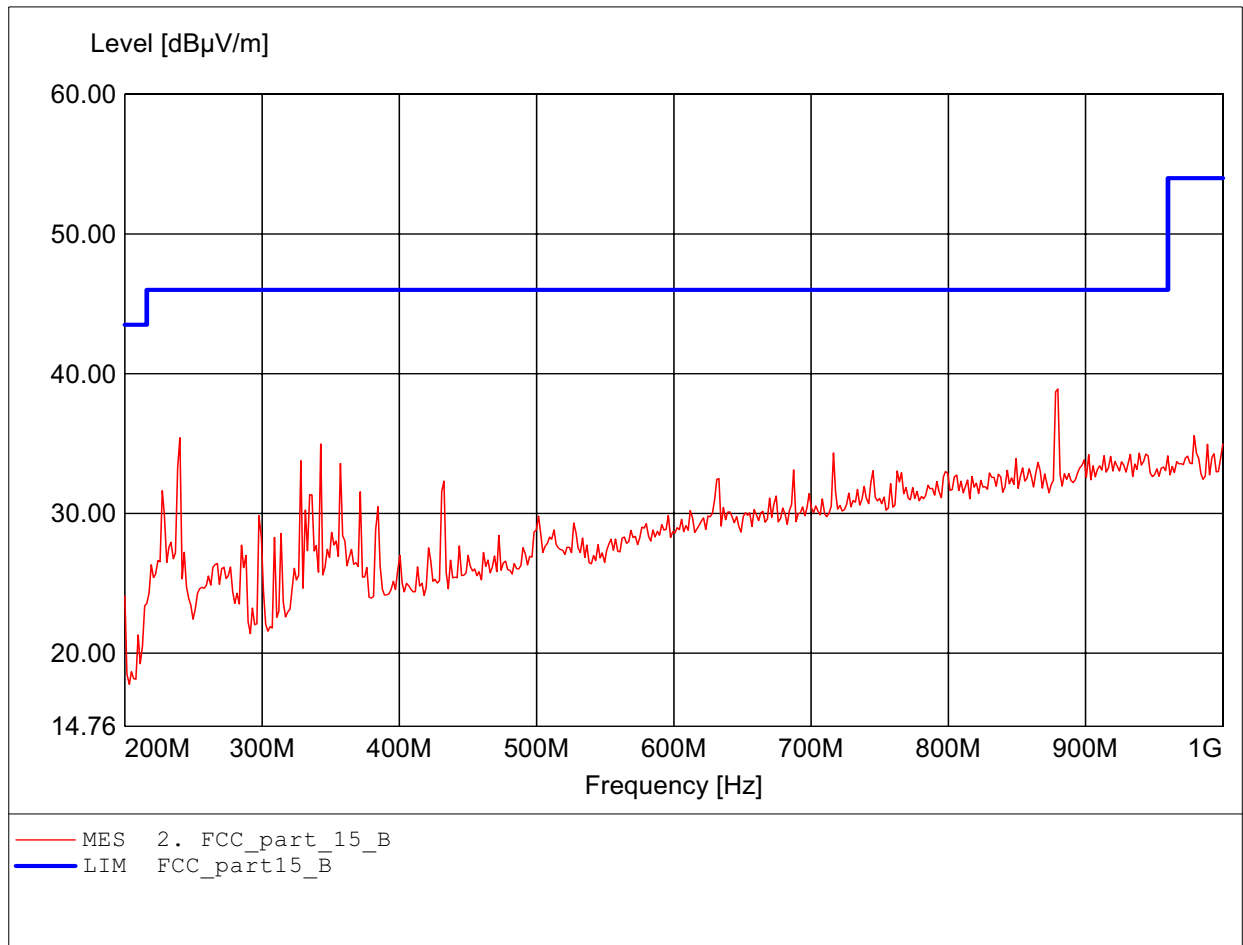

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL 223, ampl.
Freq:1.000GHz Emax:38.72dBμV/m RBW: 100 kHz

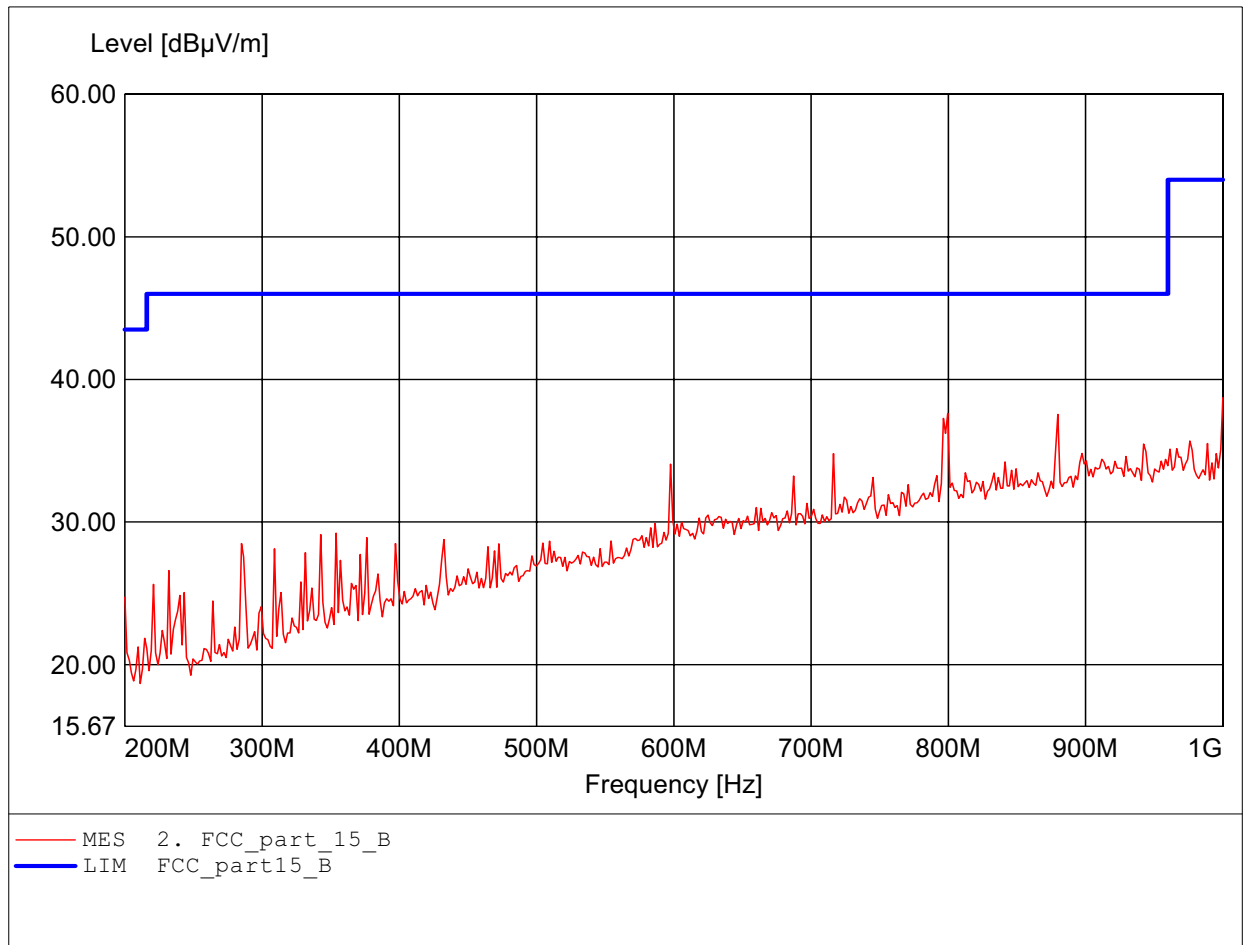

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:3.970GHz Emax:36.81dBμV/m RBW: 1 MHz

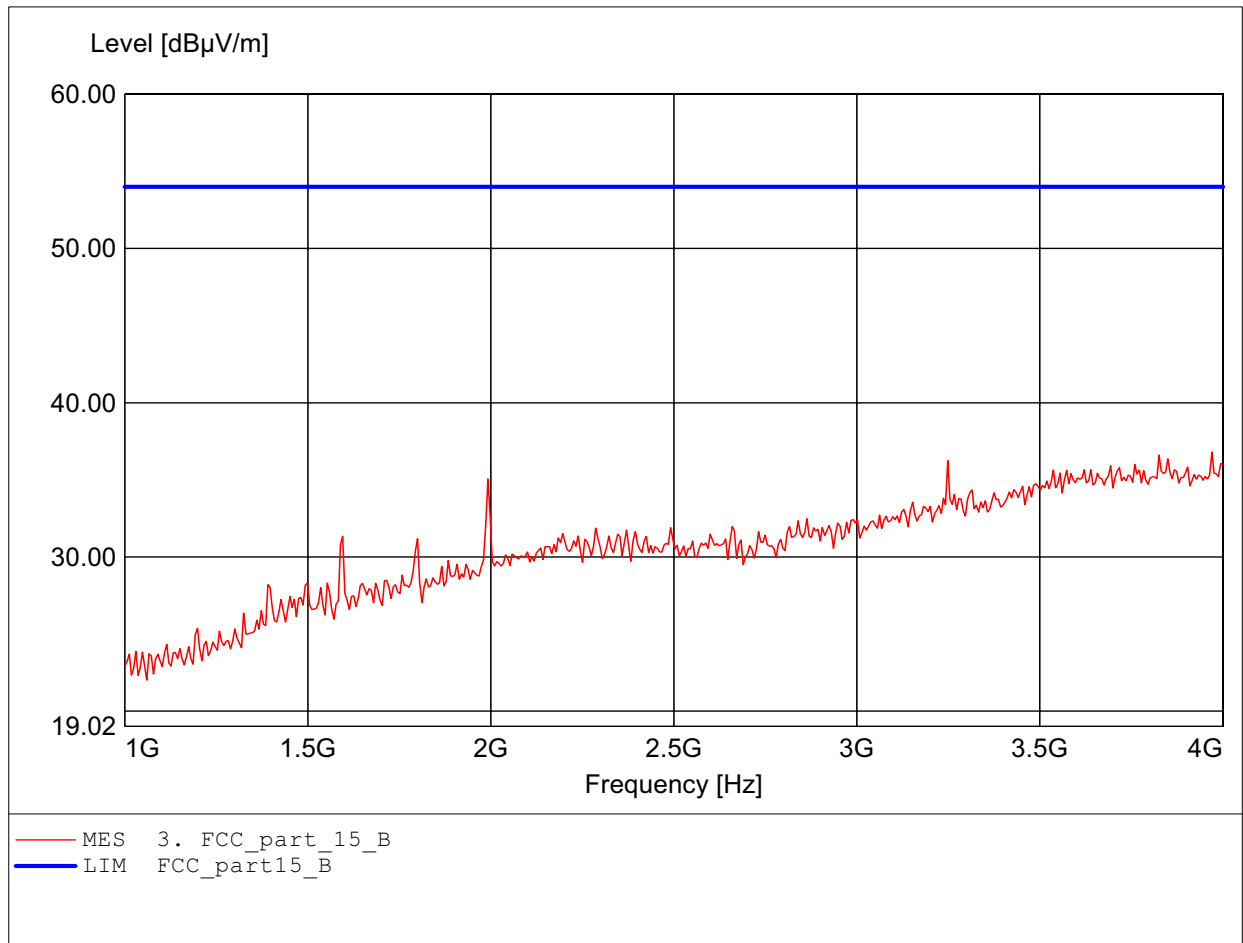

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:3.248GHz Emax:41.79dBμV/m RBW: 1 MHz

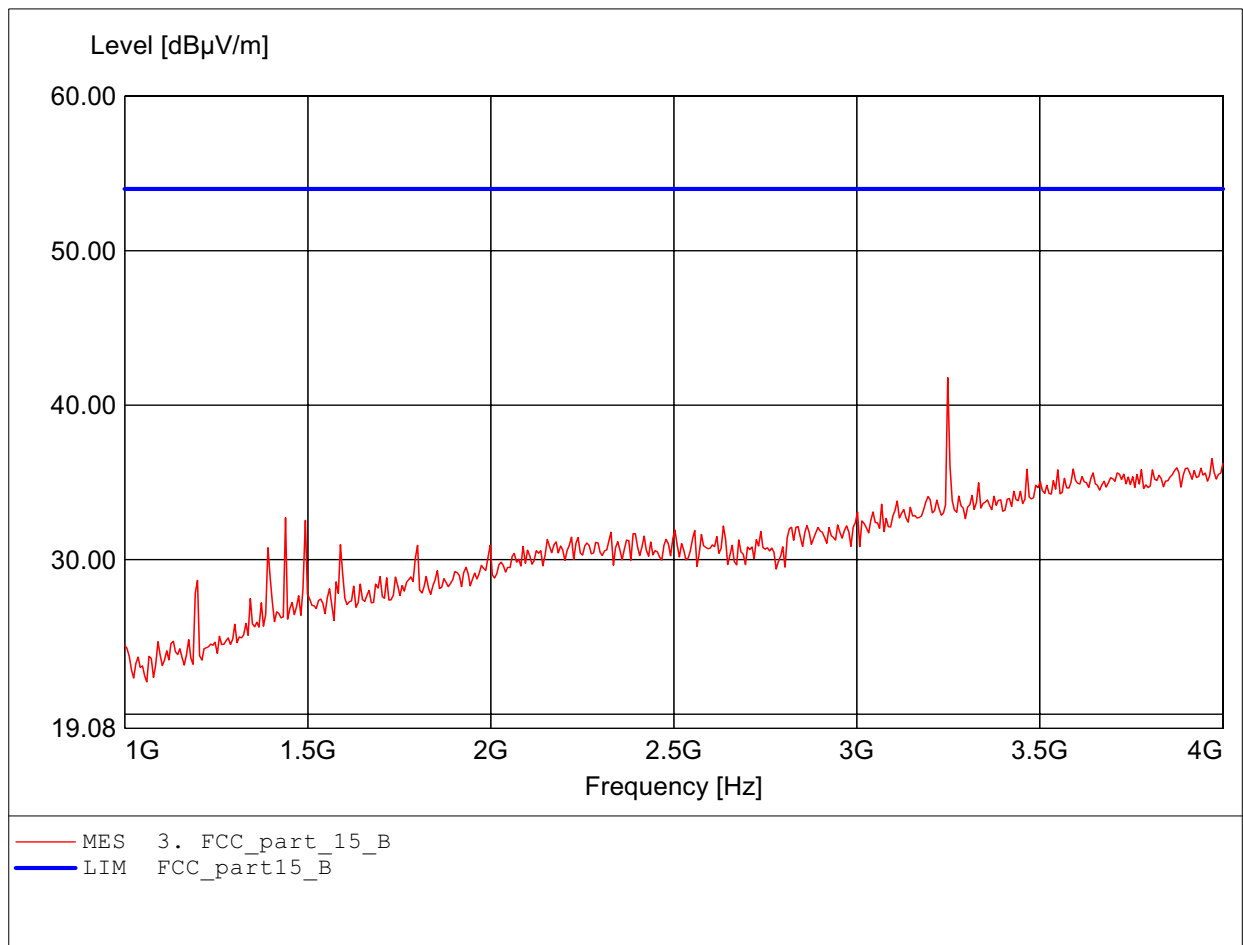

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:7.567GHz Emax:46.62dBμV/m RBW: 1 MHz

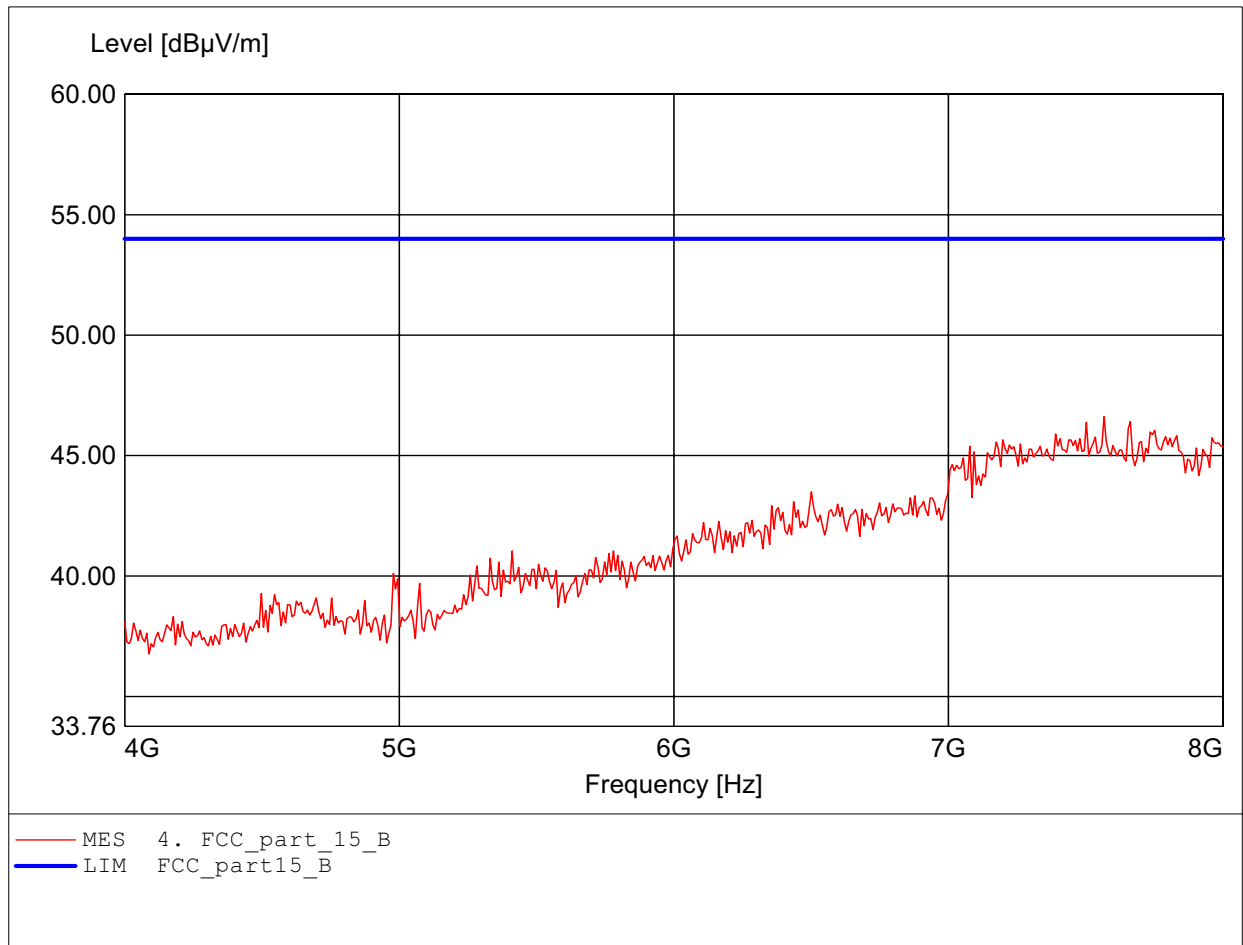

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Test Specification: according to subpart B / LP 0002
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:6.501GHz Emax:46.18dBµV/m RBW: 1 MHz

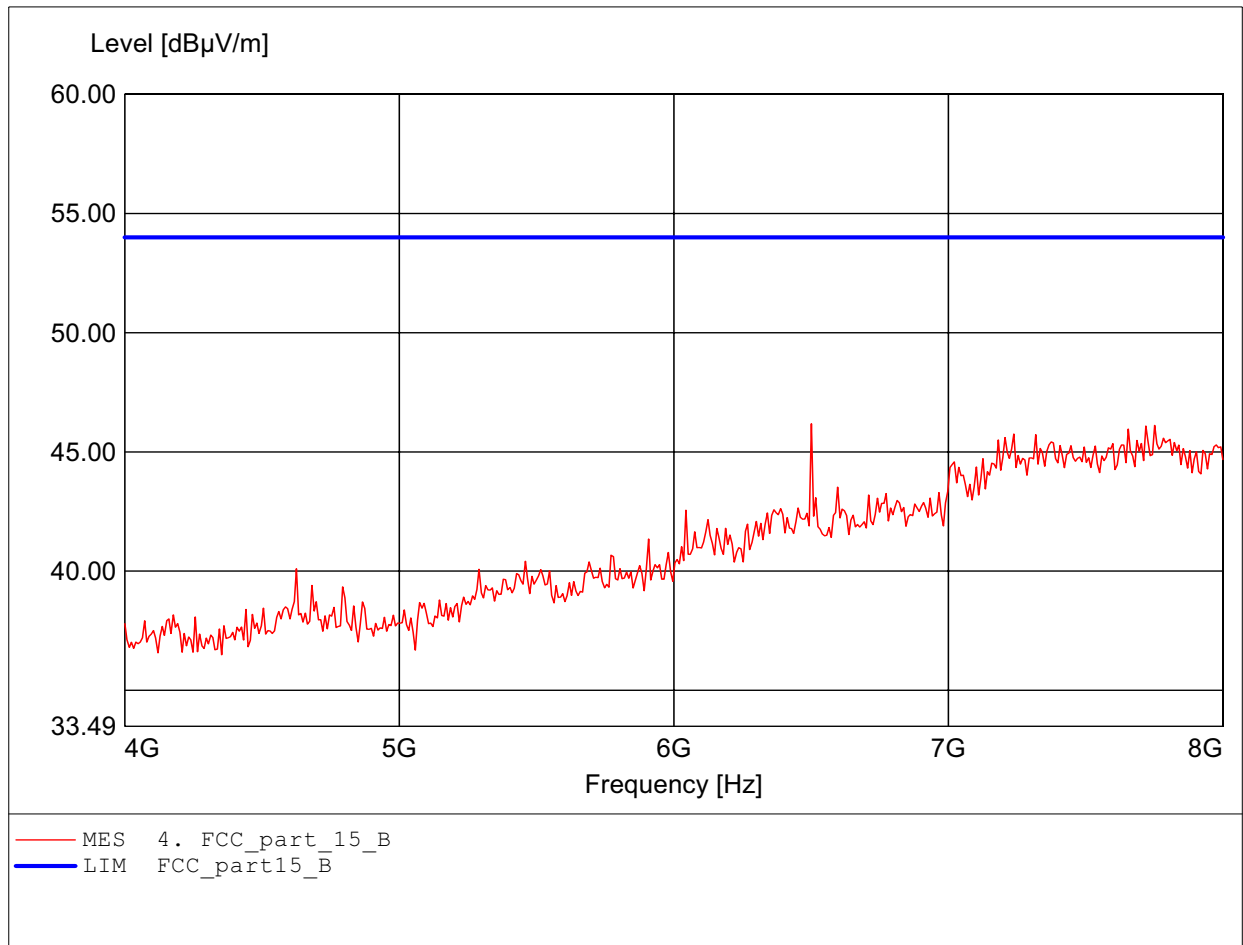

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Test Specification: according to subpart B / LP 0002
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:11.992GHz Emax:51.13dBμV/m RBW: 1 MHz

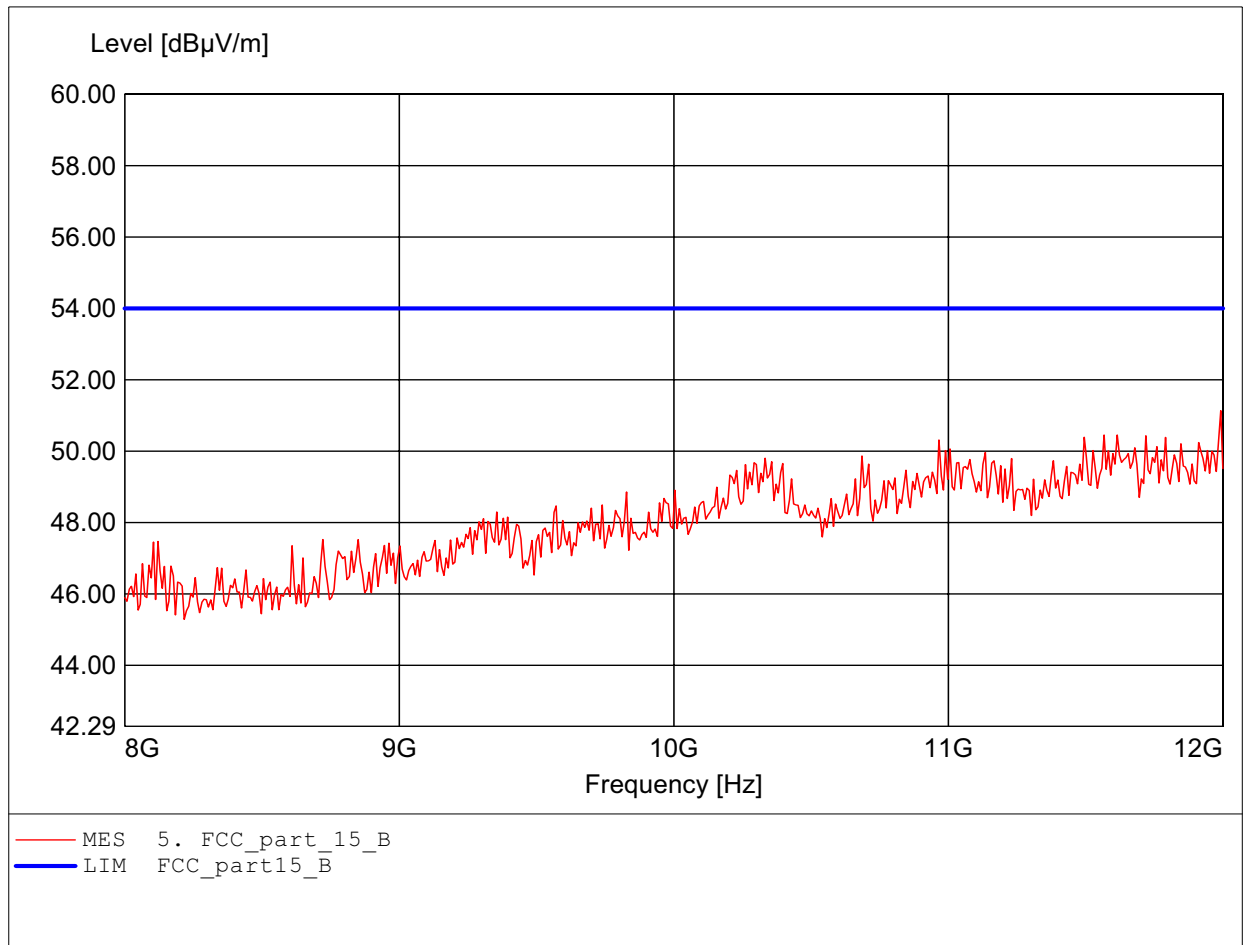

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Test Specification: according to subpart B / LP 0002
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:11.992GHz Emax:51.70dBµV/m RBW: 1 MHz

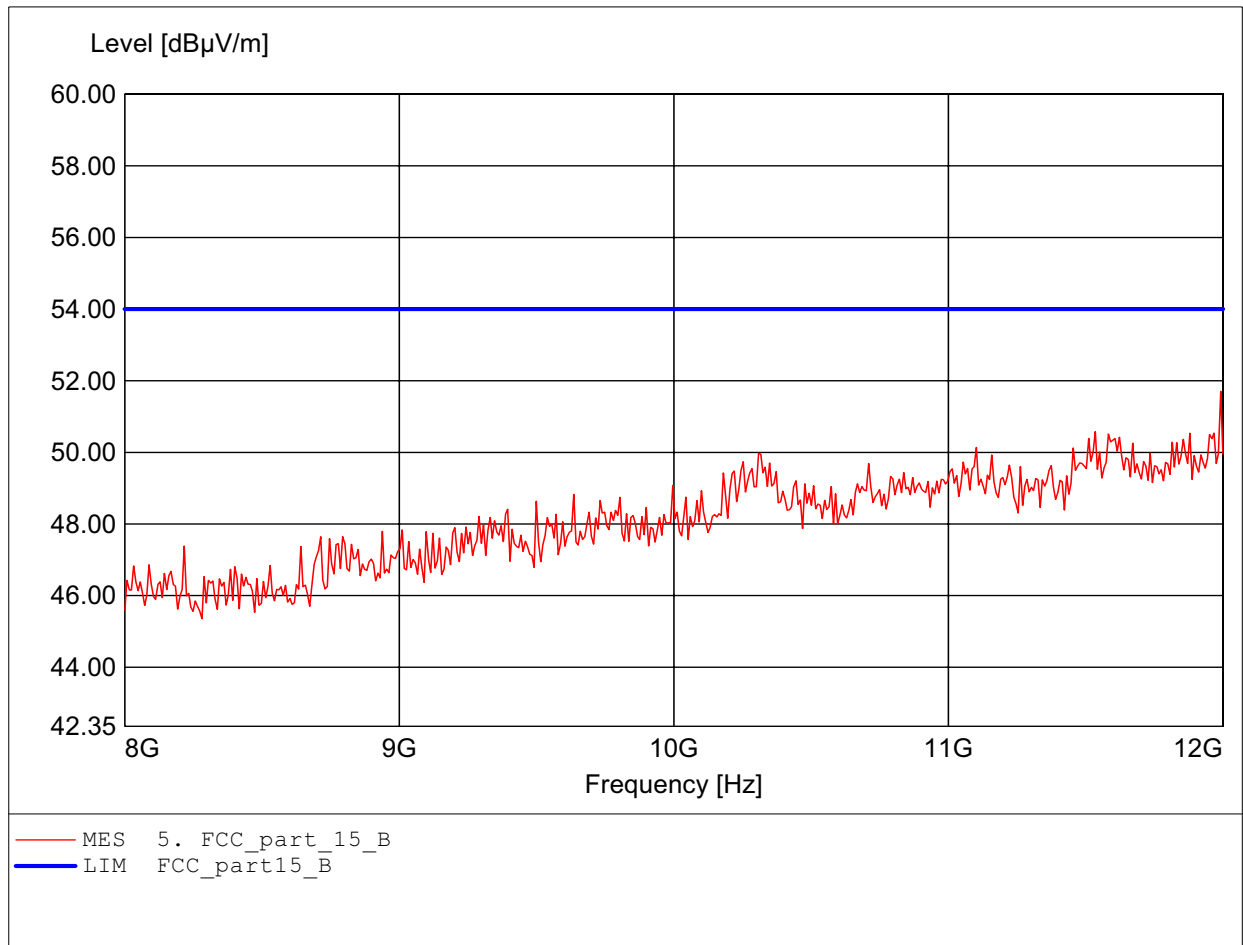

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Test Specification: according to subpart B / LP 0002
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:17.784GHz Emax:52.53dBµV/m RBW: 1 MHz

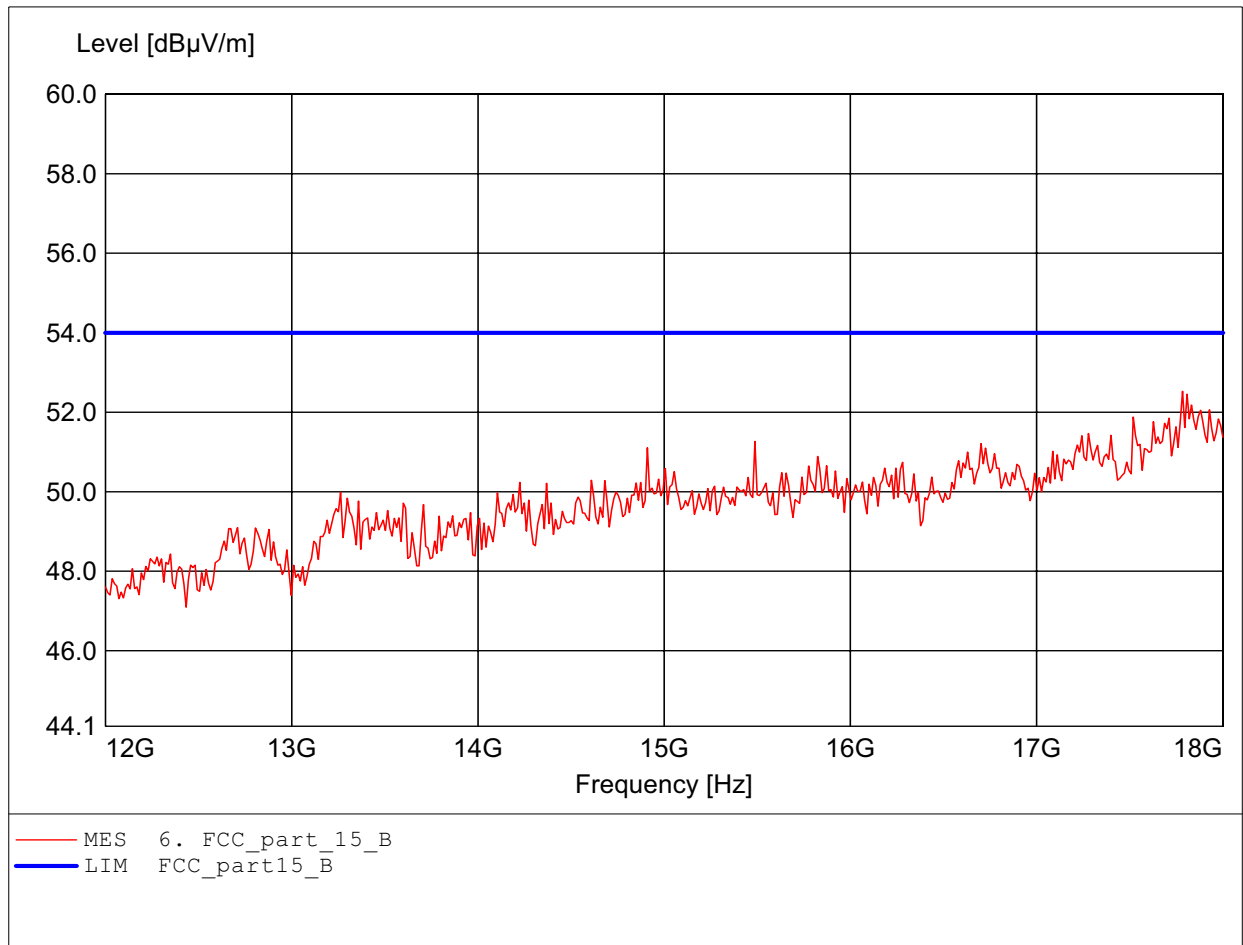

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch6
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Test Specification: according to subpart B / LP 0002
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:17.747GHz Emax:52.55dBμV/m RBW: 1 MHz

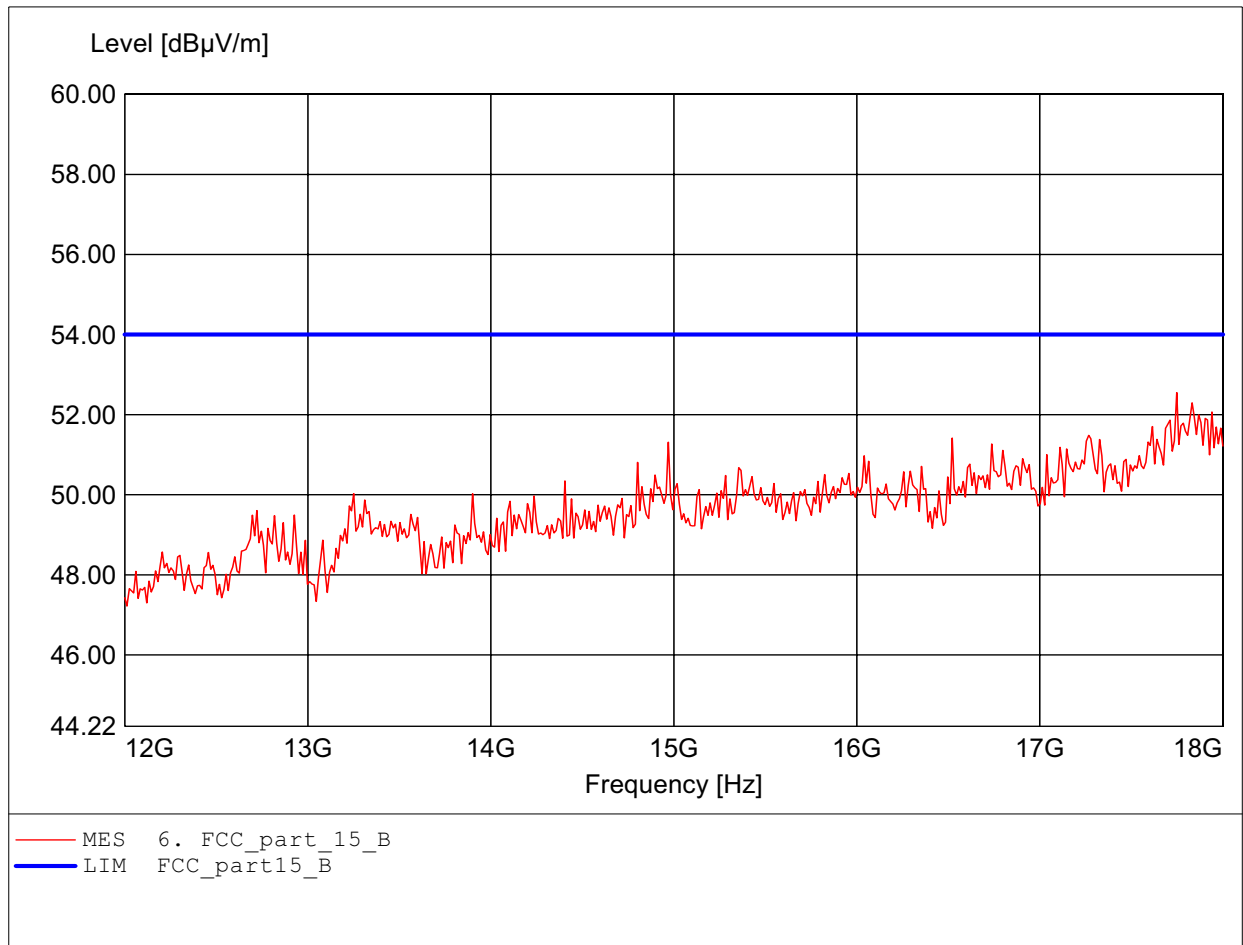

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HK 116
Freq:120.621MHz Emax:25.03dBµV/m RBW: 100 kHz

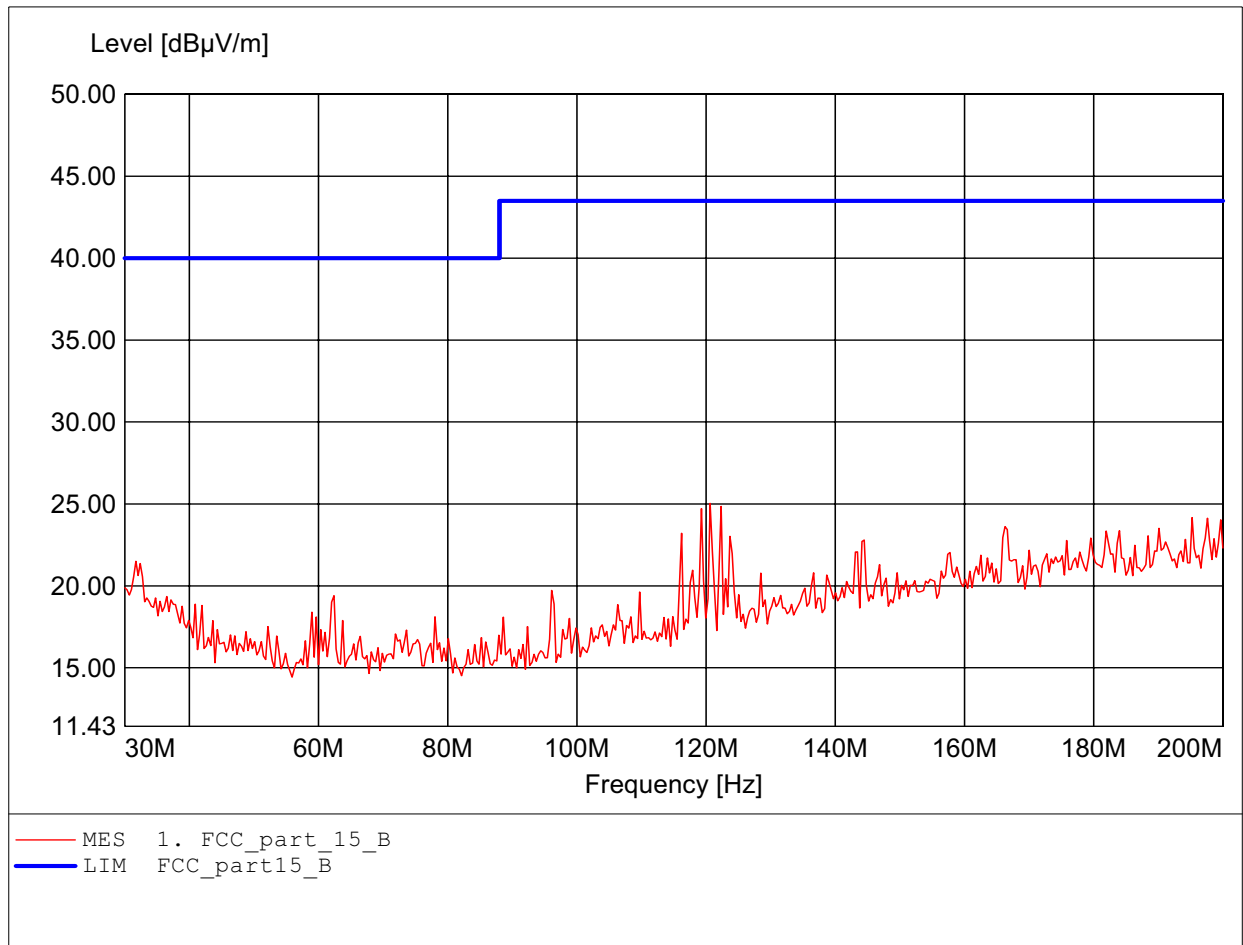

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HK 116
Freq:88.597MHz Emax:29.50dBµV/m RBW: 100 kHz

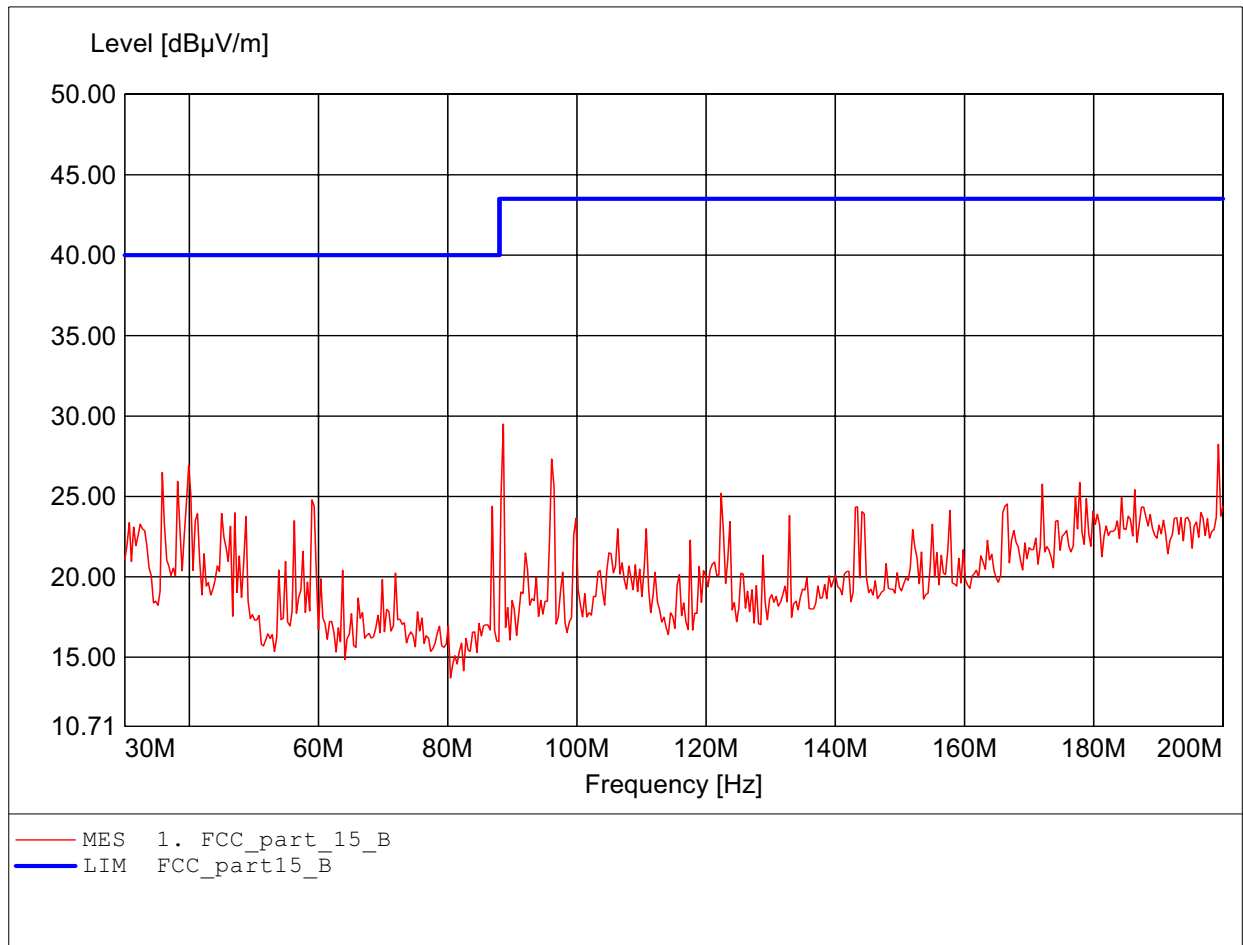

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL 223, ampl.
Freq:878.156MHz Emax:37.32dBµV/m RBW: 100 kHz

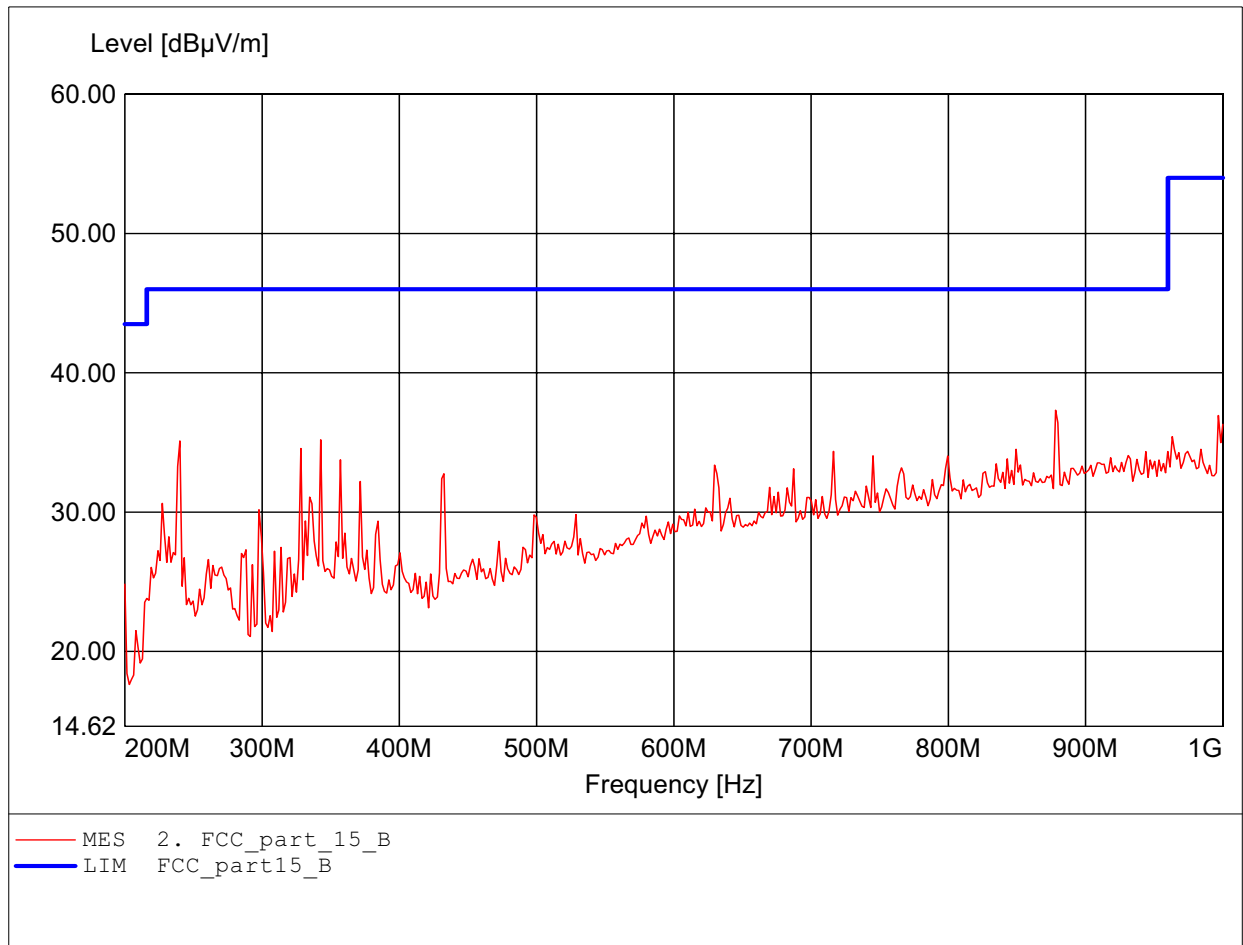

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL 223, ampl.
Freq:799.599MHz Emax:36.82dBµV/m RBW: 100 kHz

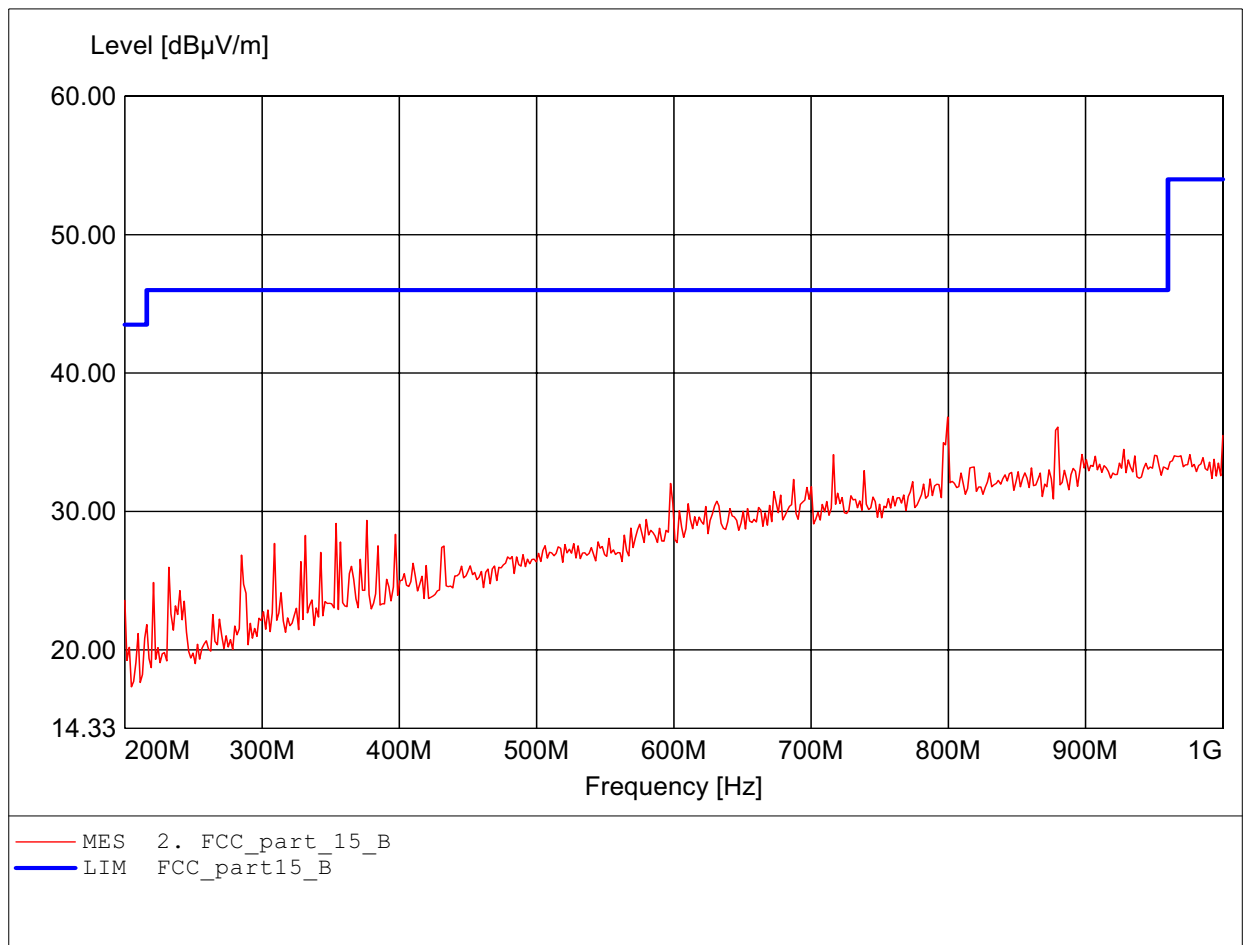

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:4.000GHz Emax:36.91dBμV/m RBW: 1 MHz

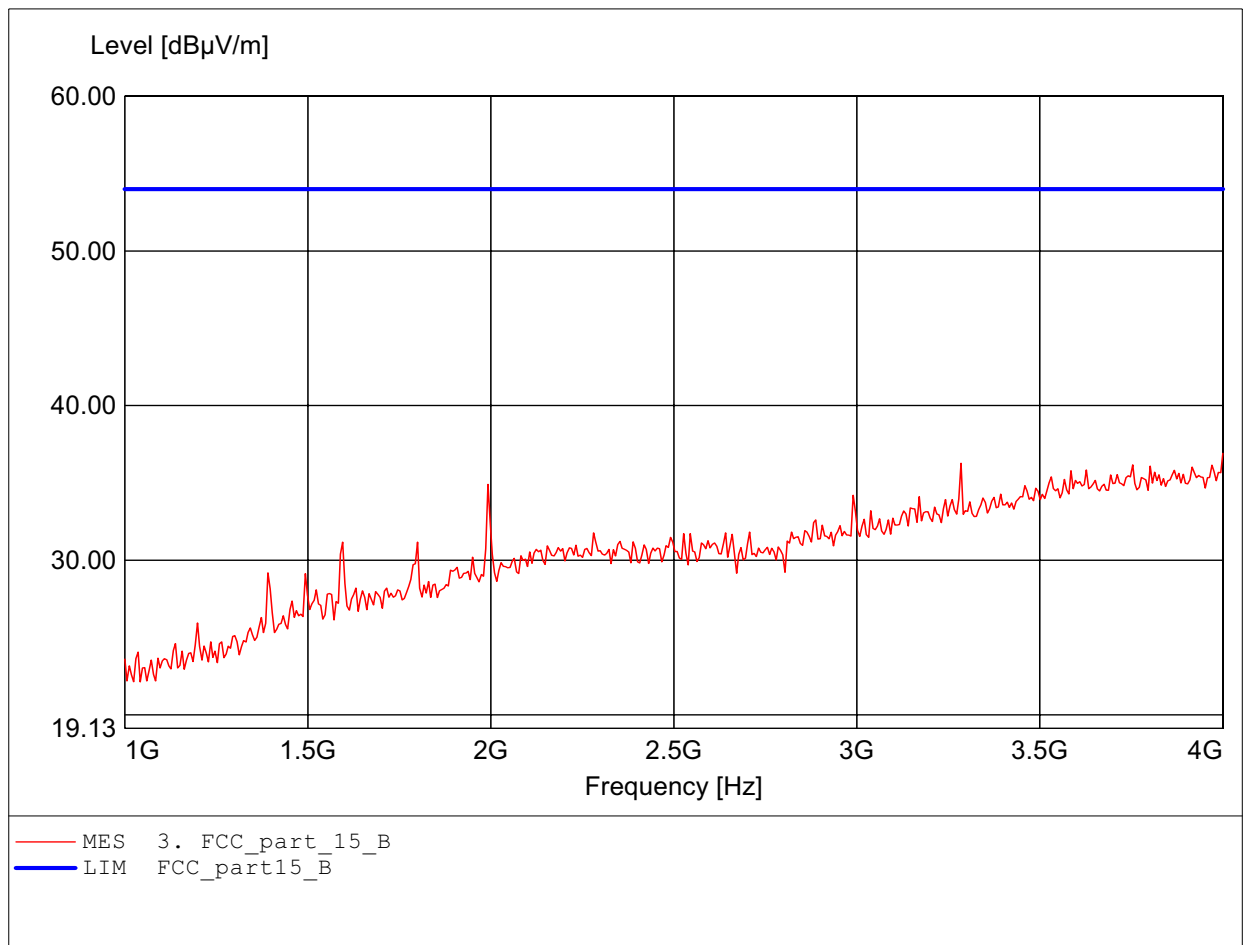

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:3.285GHz Emax:41.37dBμV/m RBW: 1 MHz

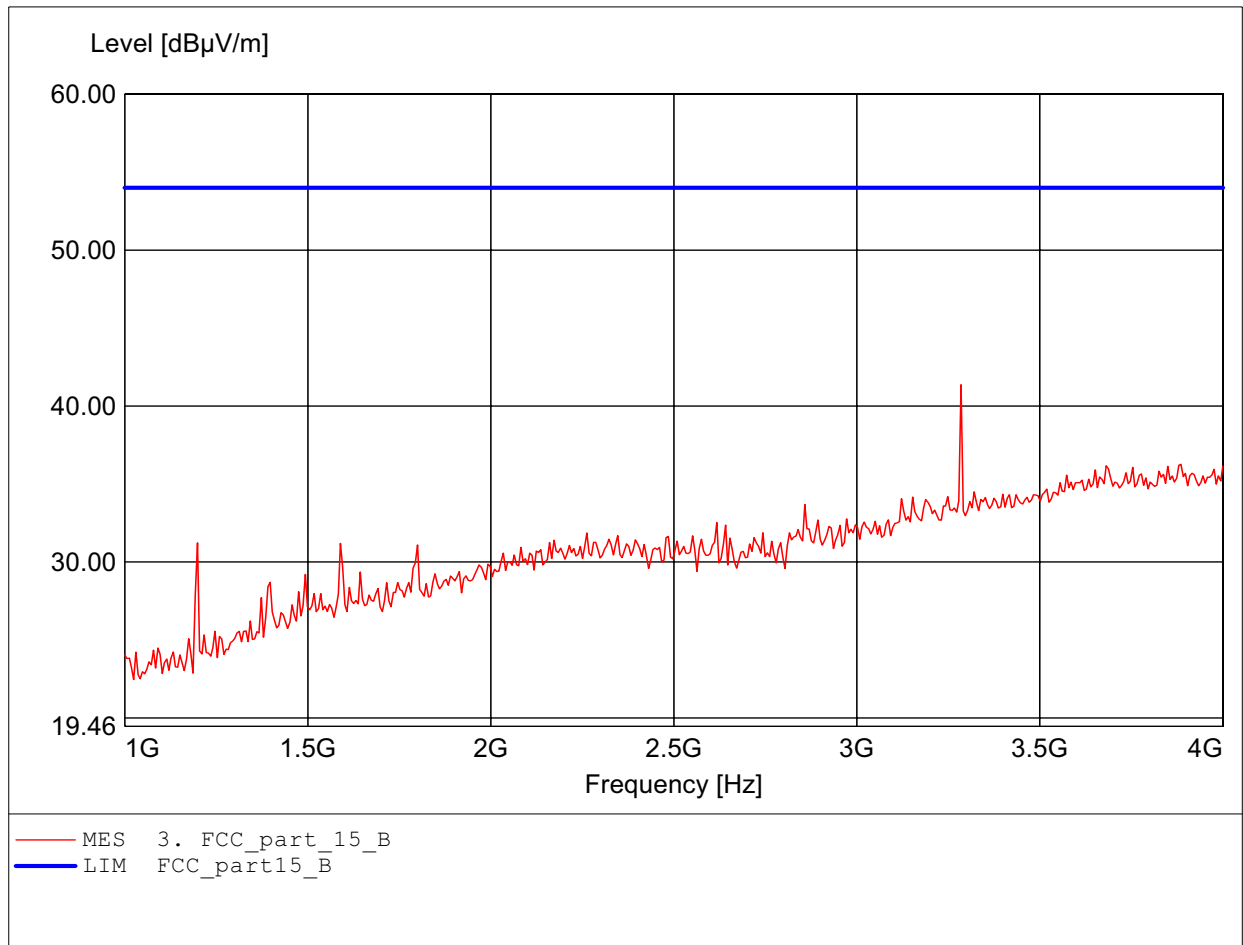

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:7.832GHz Emax:46.05dBμV/m RBW: 1 MHz

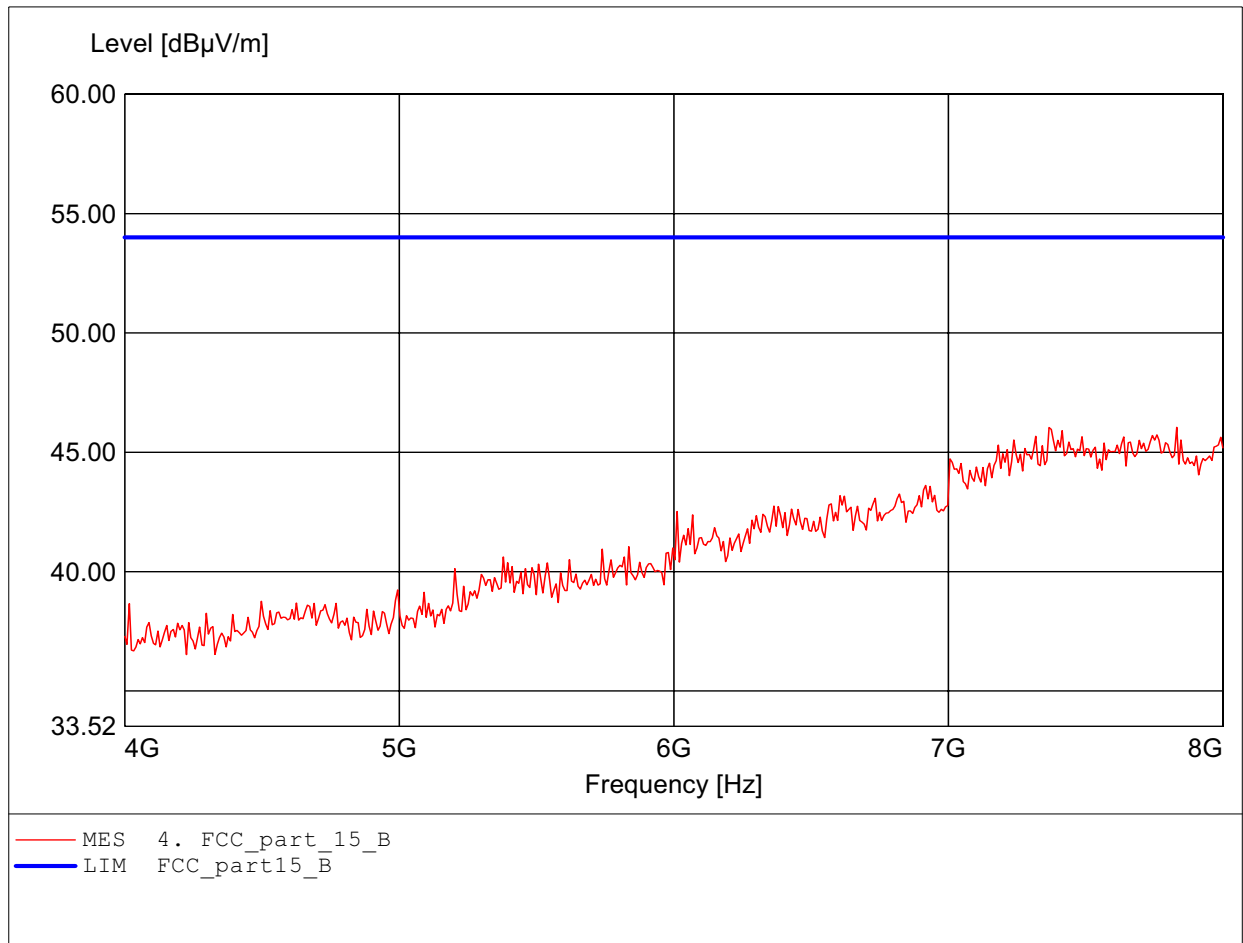

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL25, ampl.
Freq:7.760GHz Emax:46.93dBμV/m RBW: 1 MHz

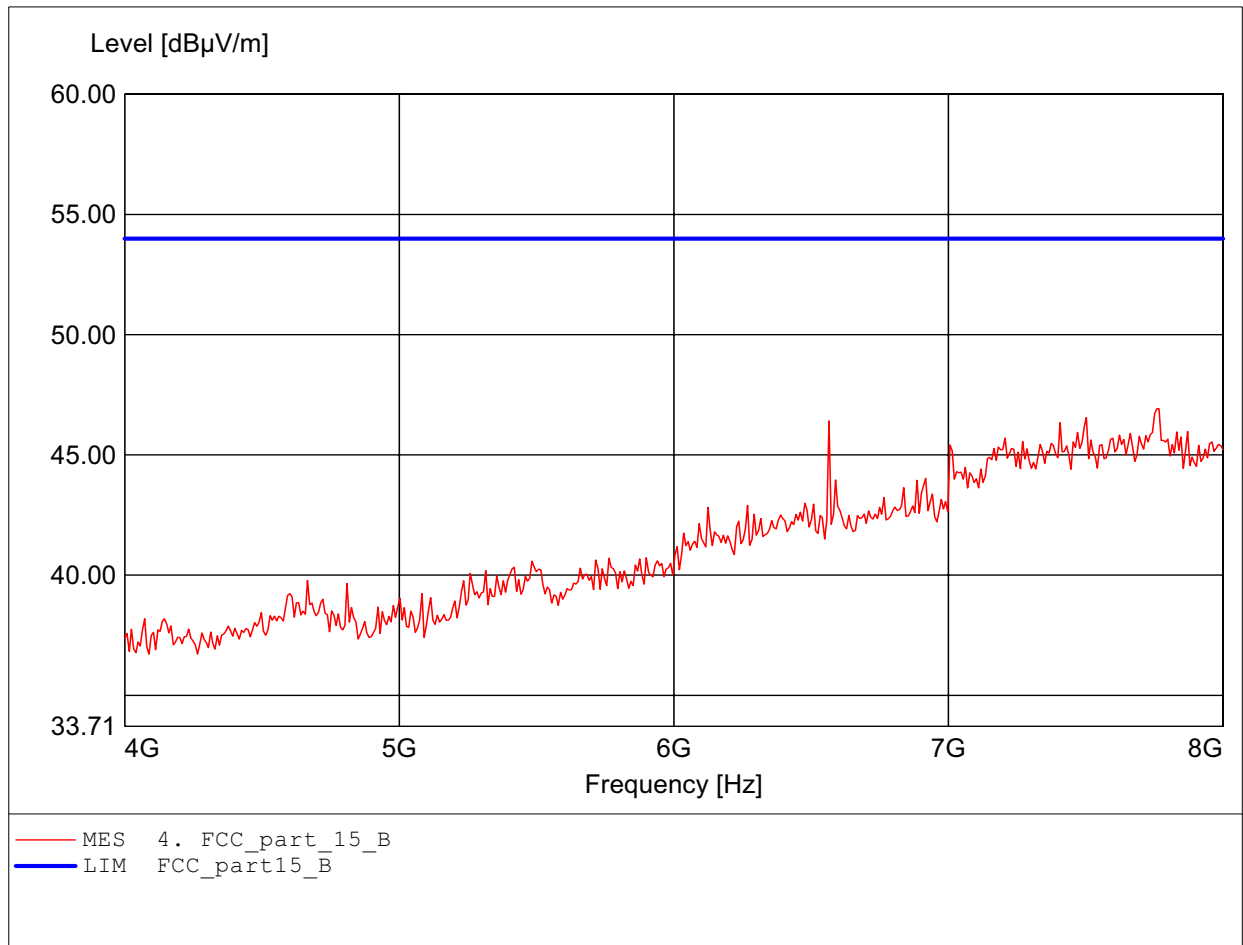

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Test Specification: according to subpart B / LP 0002
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:11.535GHz Emax:51.29dBμV/m RBW: 1 MHz

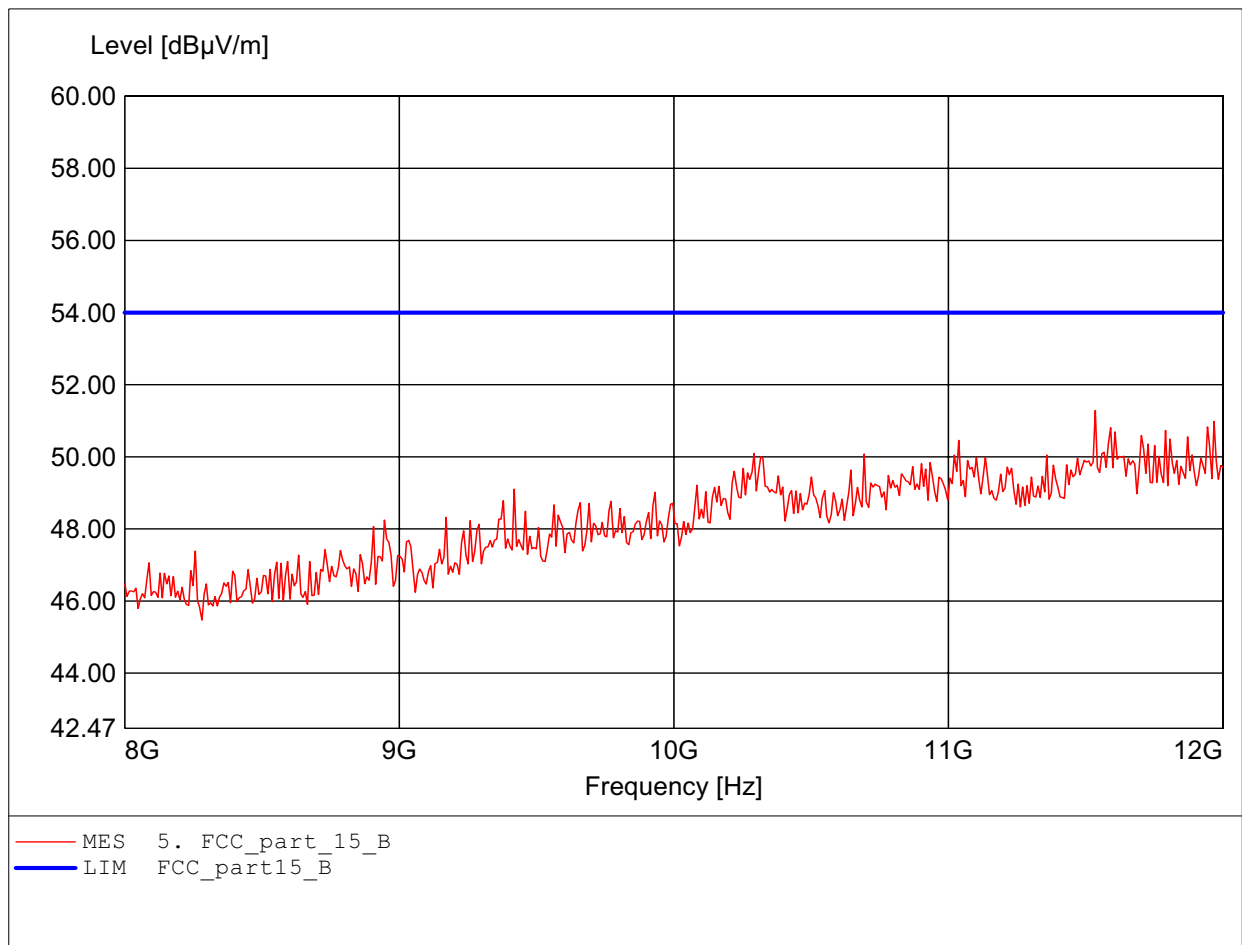

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Test Specification: according to subpart B / LP 0002
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:11.760GHz Emax:51.41dBµV/m RBW: 1 MHz

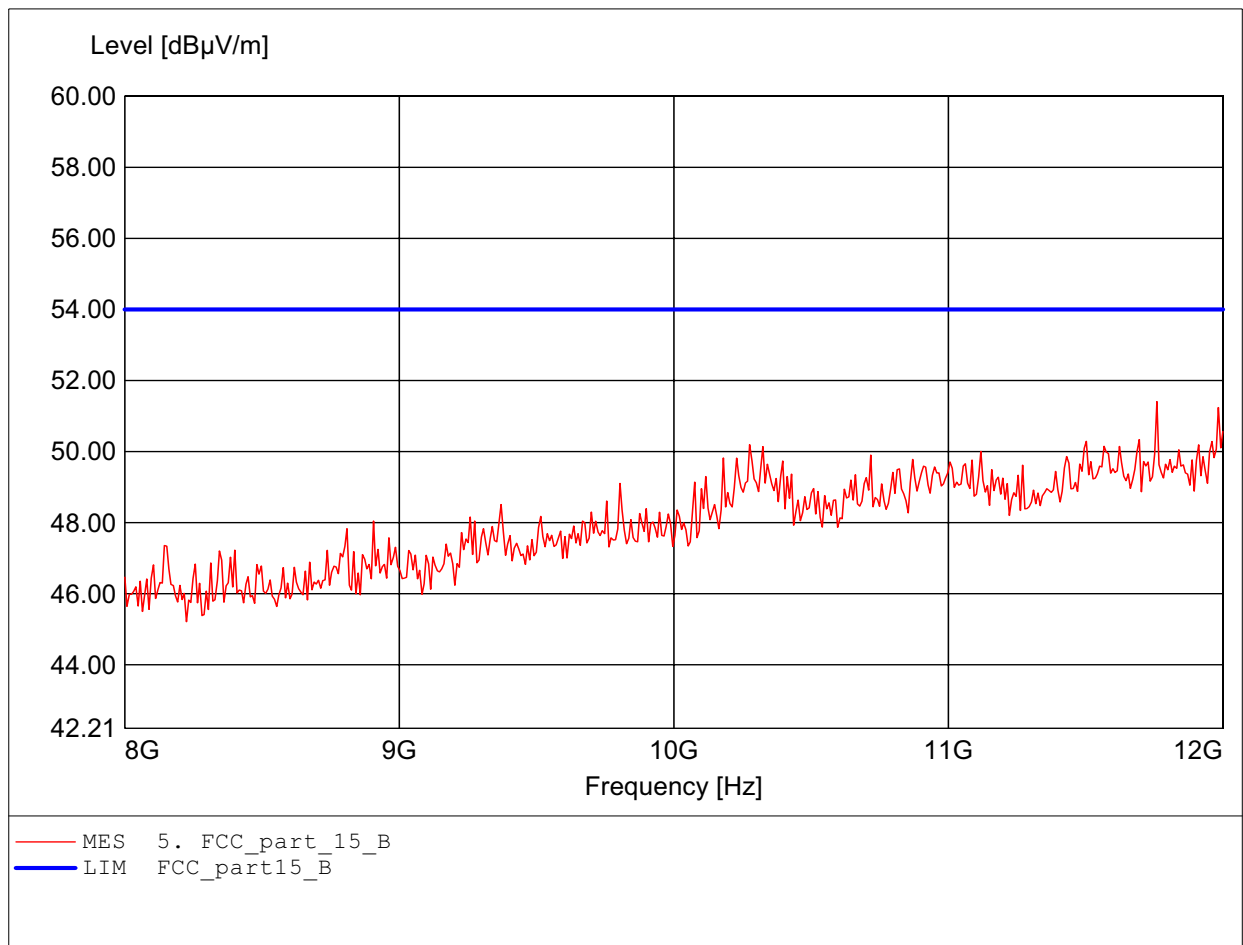

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B / LP 0002


Order Number: W6M20704-7982 802.11g ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Test Specification: according to subpart B / LP 0002
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:17.892GHz Emax:52.42dBµV/m RBW: 1 MHz

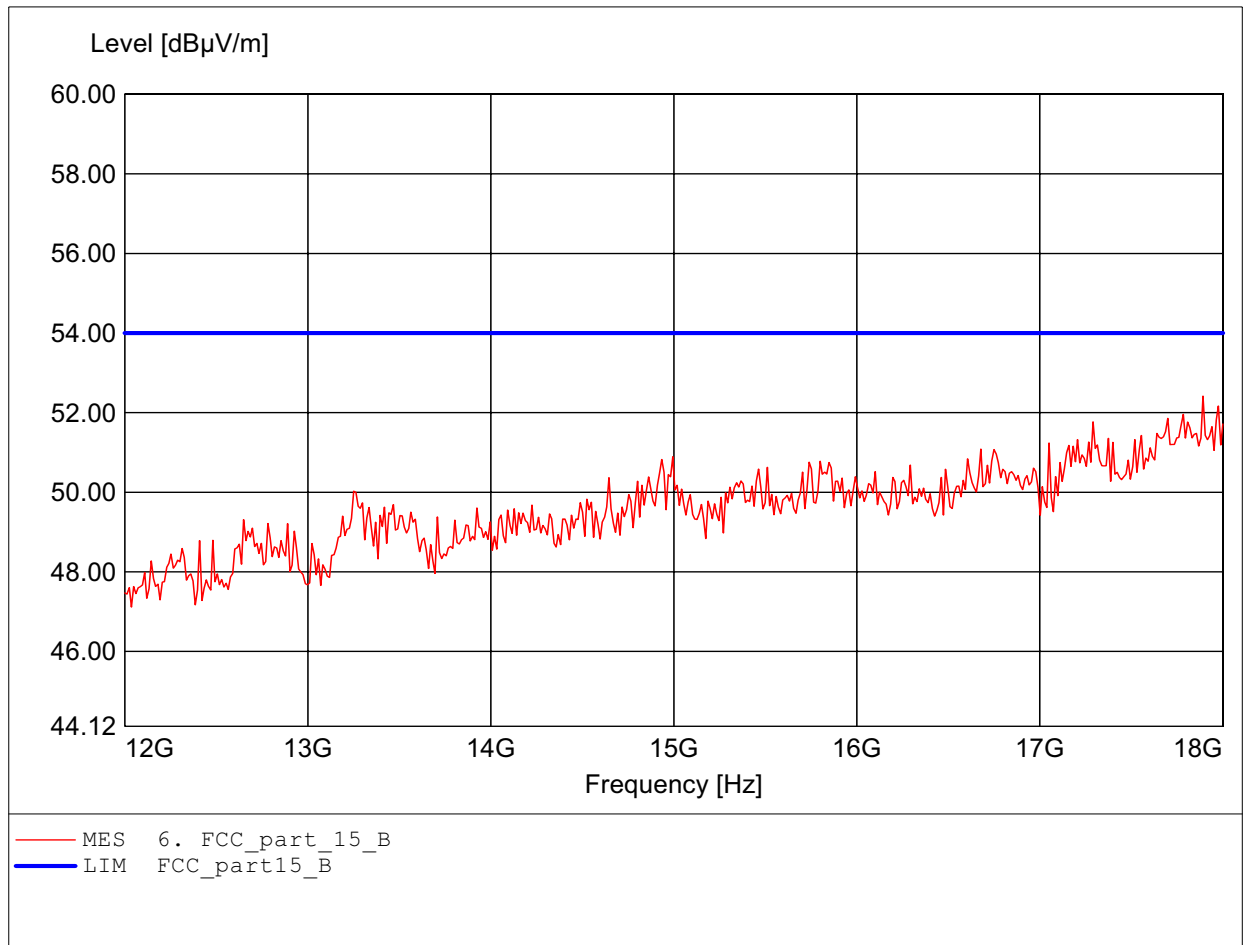

Field Strength under normal conditions


FCC RULES PART 15, SUBPART B / LP 0002

Order Number: W6M20704-7982 802.11g ch11
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Test Specification: according to subpart B / LP 0002
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:17.868GHz Emax:53.18dBµV/m RBW: 1 MHz

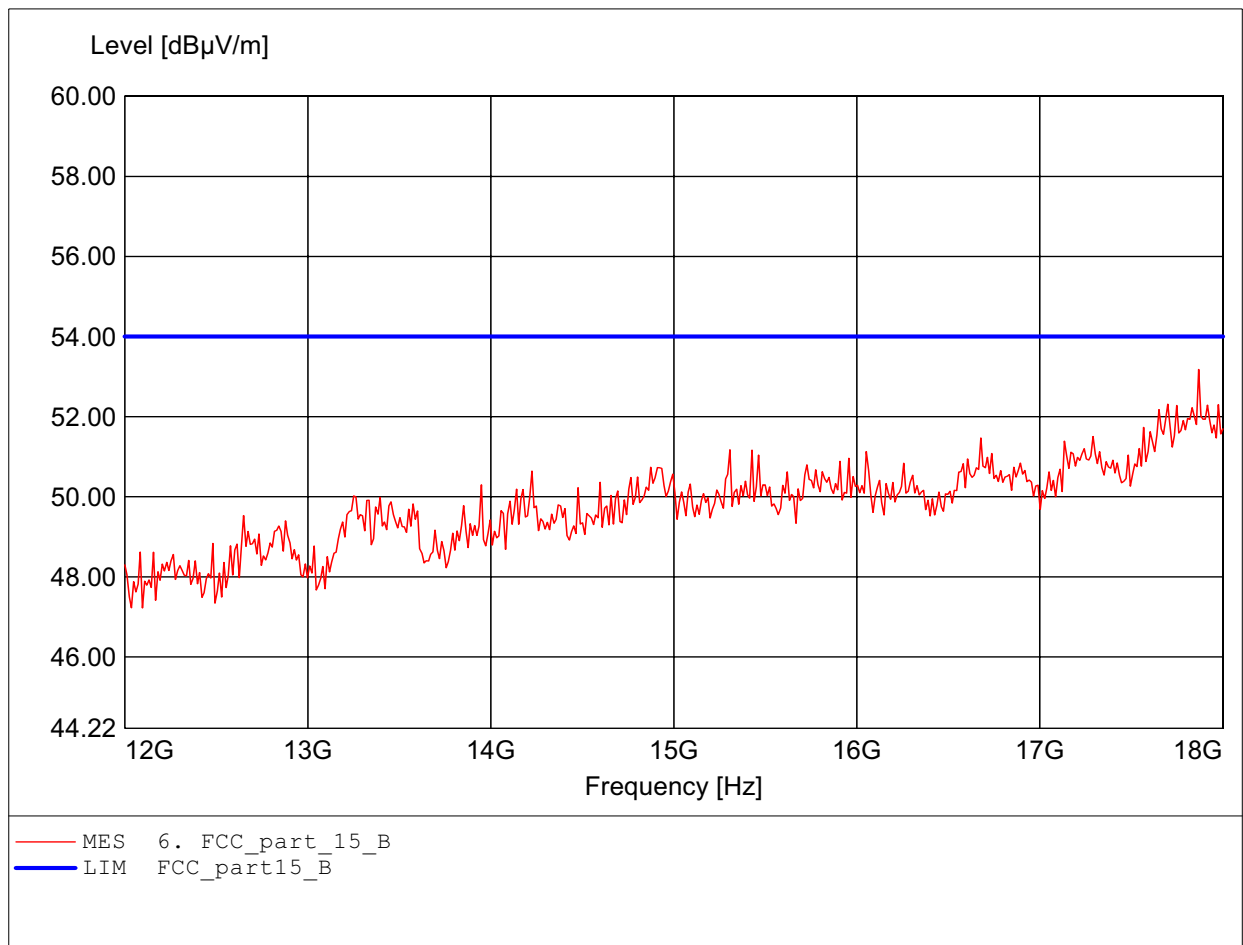


**Spurious emissions under normal conditions
in accordance to the CISPR 22**

Order Number: W6M20704-7982
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HK 116
Freq:177.856MHz Emax:25.95dBμV/m RBW: 100 kHz

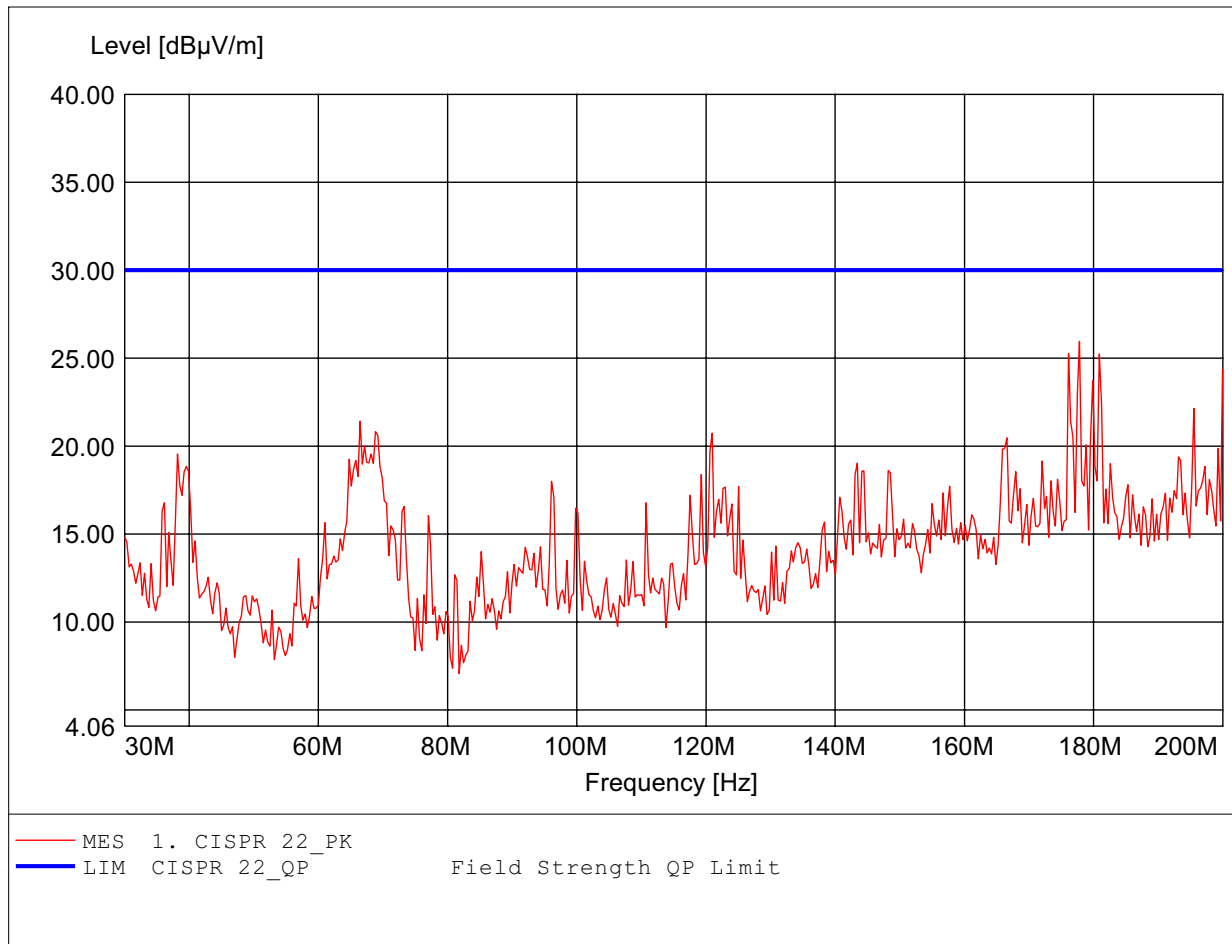


**Spurious emissions under normal conditions
in accordance to the CISPR 22**

Order Number: W6M20704-7982
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HK 116
Freq:39.539MHz Emax:25.76dBµV/m RBW: 100 kHz

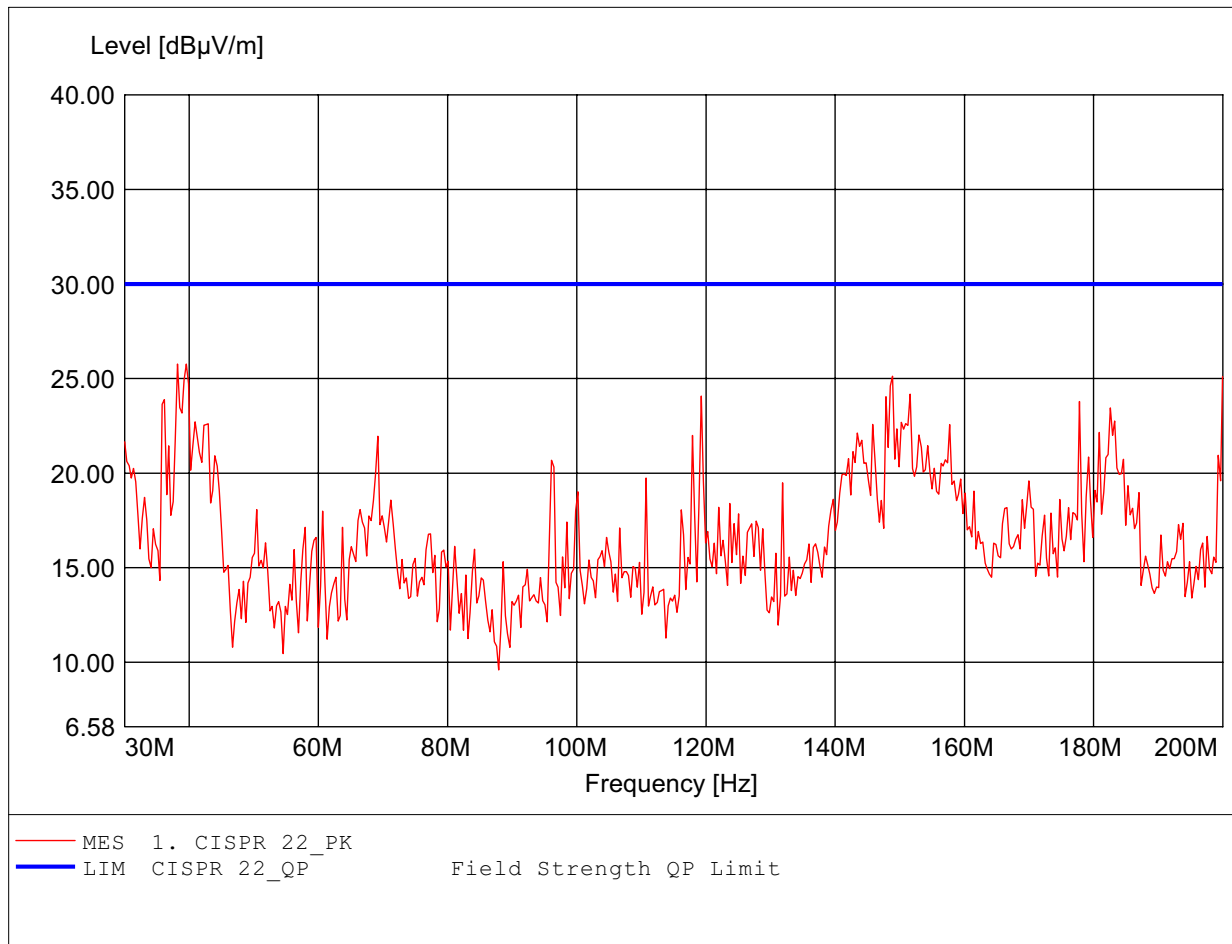


**Spurious emissions under normal conditions
in accordance to the CISPR 22**

Order Number: W6M20704-7982
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL 223
Freq:700.200MHz Emax:31.02dBμV/m RBW: 100 kHz

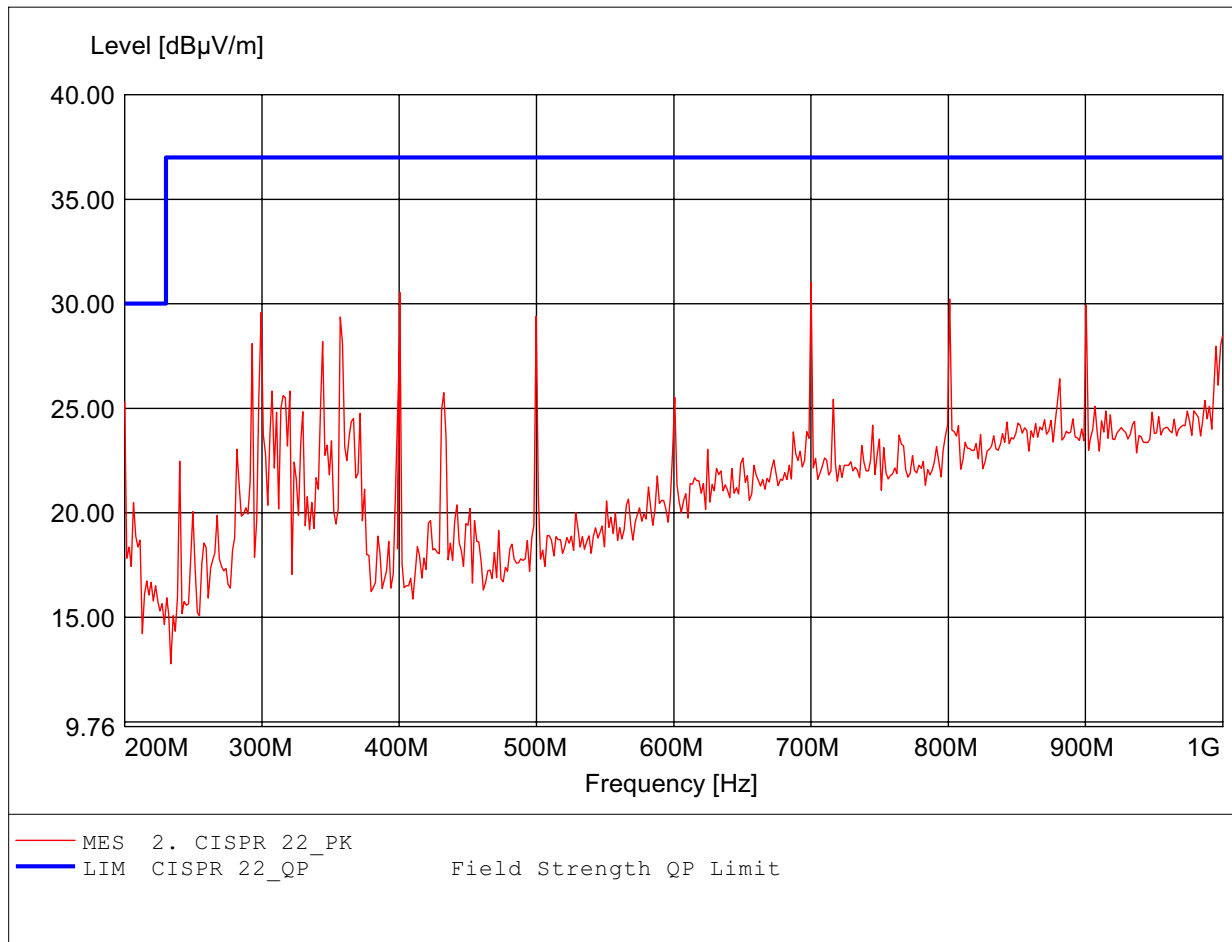

**Spurious emissions under normal conditions
in accordance to the CISPR 22**


Order Number: W6M20704-7982
Test Site / Operator: ETS / Derek
Temperature: Temp.: 23.9°C
Comment 1: Ant.: HL 223
Freq:313.828MHz Emax:32.78dBμV/m RBW: 100 kHz

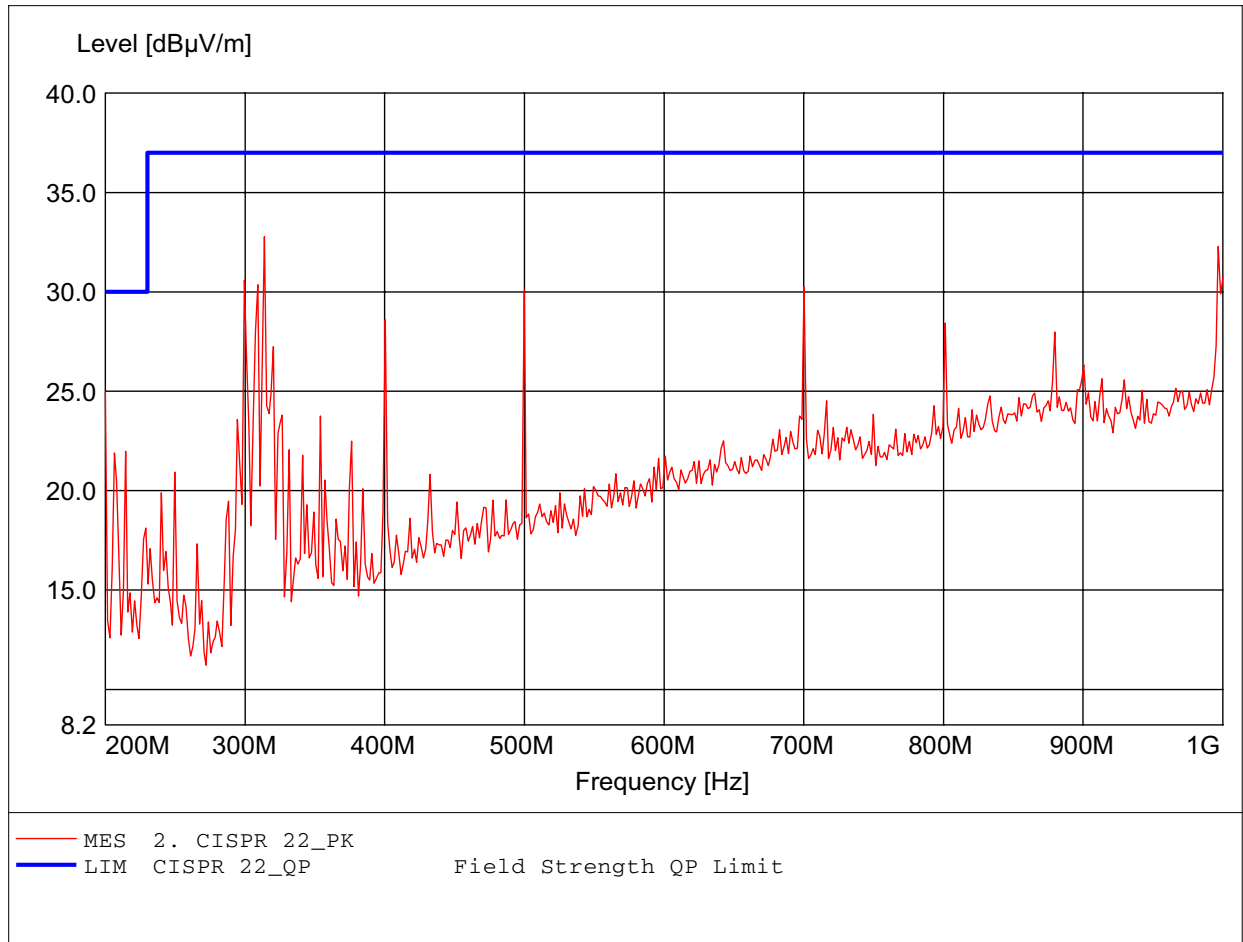

EMI voltage test in the ac-mains according to FCC Part 15

Class B

Order Number: W6M20704-7982
Operating Condition: Tnom: 23.9°C
Test Site: ETS
Operator: Derek
Test Specification: V-network: ESH3-Z5 N

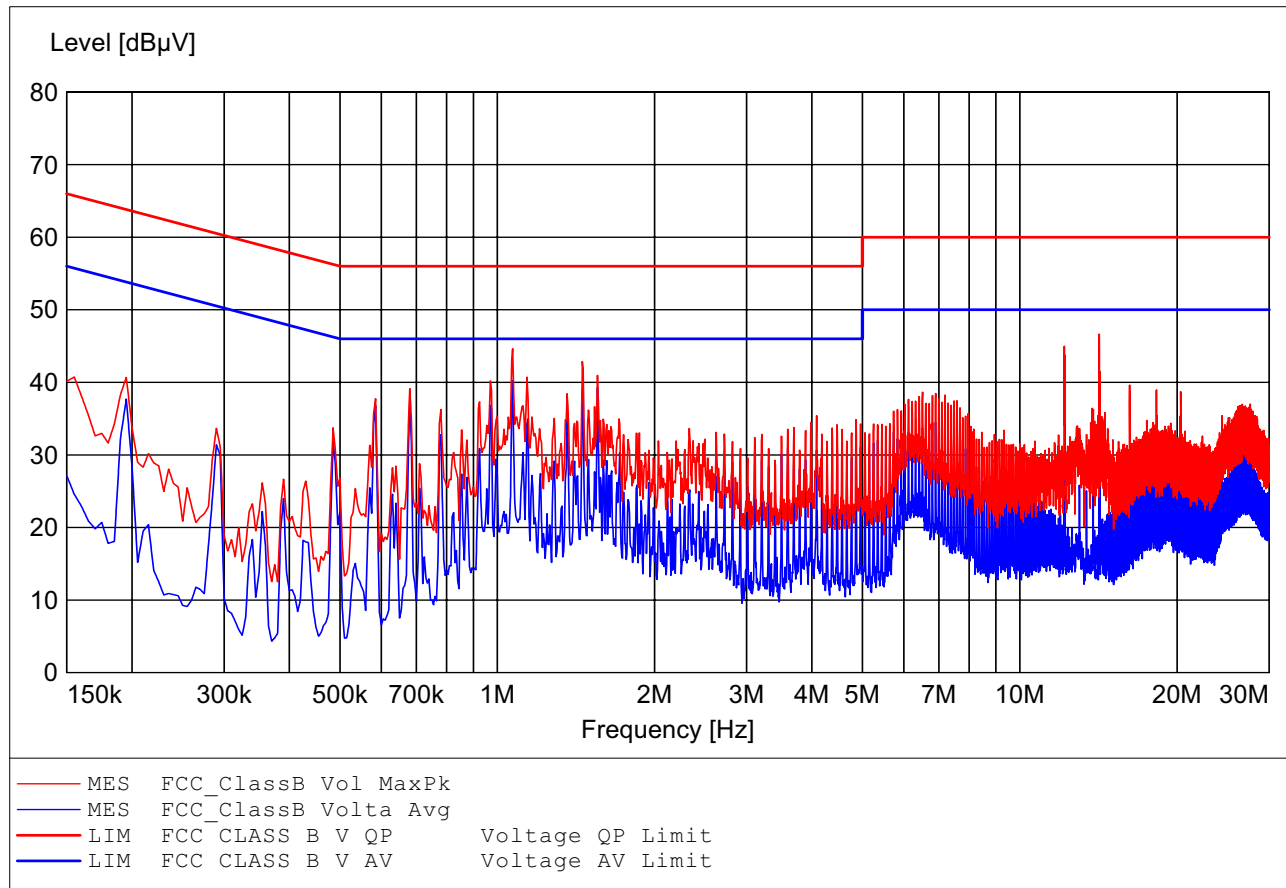

EMI voltage test in the ac-mains according to FCC Part 15

Class B

Order Number: W6M20704-7982
Operating Condition: Tnom: 23.9°C
Test Site: ETS
Operator: Derek
Test Specification: V-network: ESH3-Z5 L1

