FCC PART 15 SUBPART C TEST REPORT

for

Wireless Router

Model No.: WR861R

FCC ID: RXZ-WR861R

of

Applicant: Pro-Nets Technology Corporation Address: 15F., No.669, Bannan Rd., Zhonghe Dist., New Taipei City 23557, Taiwan (R.O.C.)

Tested and Prepared

by

Worldwide Testing Services (Taiwan) Co., Ltd.

FCC Registration No.: 930600

Industry Canada filed test laboratory Reg. No. IC 5679A-1

A2LA Accredited No.: 2732.01



Report No.: W6M21104-11399-C-1

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C. TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: <u>wts@wts-lab.com</u>



TABLE OF CONTENTS

1	GE	NERAL INFORMATION	2
	1.1	Notes	2
	1.2	TESTING LABORATORY	3
	1.2.	1 Location	3
	1.2.	2 Details of accreditation status	3
	1.3	DETAILS OF APPROVAL HOLDER	3
	1.4	APPLICATION DETAILS	4
	1.5	GENERAL INFORMATION OF TEST ITEM	4
	1.6	Test standards	5
2	TE	CHNICAL TEST	6
	2.1	SUMMARY OF TEST RESULTS	6
	2.2	TEST ENVIRONMENT	6
	2.3	TEST EQUIPMENT LIST	7
	2.4	GENERAL TEST PROCEDURE1	0
3	TE	ST RESULTS (ENCLOSURE)1	2
	3.1	PEAK OUTPUT POWER (TRANSMITTER)	3
	3.2	EQUIVALENT ISOTROPIC RADIATED POWER	0
	3.3	RF EXPOSURE COMPLIANCE REQUIREMENTS	0
	3.4	TRANSMITTER RADIATED EMISSIONS IN RESTRICTED BANDS	1
	3.5	Spurious Emissions (TX)	2
	3.6	RADIATED EMISSION ON THE BAND EDGE	2
	3.7	MINIMUM 6 dB BANDWIDTH	7
	3.8	PEAK POWER SPECTRAL DENSITY	3
	3.9	RADIATED EMISSION FROM DIGITAL PART	0
	3.10	Power Line Conducted Emission	1
A	PPENI	DIX	



<u>1</u> General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems. The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that is performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.

Specific Conditions:

Usage of the hereunder tested device in combination with other integrated or external antennas requires at least additional output power measurements, spurious emission measurements, conducted emission measurements (AC supply lines) and radio frequency exposure evaluations for each individual configuration performed, for certification by FCC.

The test sample is able to work according IEEE 802.11 b/g/n.

This report is related to FCC Part 15 C (DSSS and OFDM device).

Robert Ren

Tester:

Date

Date

May 23, 2011

WTS-Lab. Name

Signature

Technical responsibility for area of testing:

WTS

May 23, 2011

Chang Tse-Ming

Name

Chang Tre-Ming



1.2 **Testing laboratory**

1.2.1 Location

OATS No.5-1, Lishui, Shuang Sing Village, Wanli Dist., New Taipei City 207, Taiwan (R.O.C.) Company Worldwide Testing Services(Taiwan) Co., Ltd. 6F, NO. 58, LANE 188, RUEY-KUANG RD. NEIHU, TAIPEI 114, TAIWAN R.O.C. Tel : 886-2-66068877 Fax : 886-2-66068879

1.2.2 Details of accreditation status

Accredited testing laboratory

A2LA accredited number: 2732.01

FCC filed test laboratory Reg. No. 930600

Industry Canada filed test laboratory Reg. No. IC 5679A-1



Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :

Name:	./.
Accredited number:	./.
Street:	./.
Town:	./.
Country:	./.
Telephone:	./.
Fax:	./.

1.3 Details of approval holder

Name:	Pro-Nets Technology Corporation
Street:	15F., No.669, Bannan Rd., Zhonghe Dist.,
Town:	New Taipei City 23557,
Country:	Taiwan (R.O.C.)
Telephone:	+ 886-2-82218385
Fax:	+ 886-2-32345818



1.4 Application details

Date of receipt of test item:	May 4, 2011
Date of test:	from May 5, 2011 to May 20, 2011

1.5 General information of Test item

Type of test item:	Wireless Router
Model Number:	WR861R
Brand Name:	PRO-NETS
Multi-listing model number:	WR851R
-	
Photos:	see Appendix
Technical data	
Frequency band:	2.4 GHz – 2.4835 GHz
11b, 11g, 11n 20MHz	
Frequency (ch 1 or A):	2.412 GHz
Frequency (ch 6 or B):	2.437 GHZ
Frequency (ch 11 or C):	2.462 GHz
11n 40MHz	
Frequency (ch 1 or A):	2.422 GHz
Frequency (ch 4 or B):	2.437 GHZ
Frequency (ch 7 or C):	2.452 GHz
Number of Channels:	11b, 11g, 11n 20MHz: 11
	11n 40MHz: 7
Operation modes:	duplex
Modulation Type:	DSSS / OFDM
Fixed point-to-point operation:	\Box Yes / \boxtimes No
Type of Antenna:	Dipole Antenna (permanent connected to the router)
Antenna gain:	2 dBi
Power supply:	Adaptor (I/P: 100-240V, 50/60 Hz, 0.6A O/P: 5V, 2A)
Emission designator:	11b: DSSS: 15M8G1D
	11g: OFDM: 16M9W7D
	11n 20MHz: OFDM: 18M1W7D
	11n 40MHz: OFDM: 36M2W7D
Host device:	none



Registration number: W6M21104-11399-C-1 FCC ID: RXZ-WR861R

Classification :							
Fixed Device							
Mobile Device (Hum	an Body distance > 20 cm)						
Portable Device (Hun	nan Body distance < 20cm)						
Modular Radio Devic	e 🗌						
<u>Transmitter</u>	<u>Unom</u>						
Mode A (802.11b)	Conducted 12.59 JDm						
Power (ch 1 or A):	Conducted: 12.58 dBm						
Power ($ch \ 6 \ or \ B$):	Conducted: 13.30dBm Conducted: 13.06 dBm						
Power (ch 11 or C):	Conducted. 15.00 dBm						
Mode B (802.11g)							
Power (ch 1 or A):	Conducted: 10.66 dBm						
Power (ch 6 or B):	Conducted: 10.52 dBm						
Power (ch 11 or C):	Conducted: 11.10 dBm						
Mode C (802.11n20MHz)							
Power (ch 1 or A):	Conducted: 11.07 dBm						
Power ($ch \ 6 \ or \ B$):	Conducted: 11.07 dBm						
Power (ch 11 or C):	Conducted: 11.06 dBm						
Mode D (802.11n40MHz)	Conducted: 9.67 dBm						
Power (ch 1 or A):	Conducted: 9.67 dBm Conducted: 9.68 dBm						
Power (ch 4 or B):	Conducted: 9.54 dBm						
Power (ch 7 or C):	Conducted: 9.34 dBm						
Manufacturer: (if applicable)							
Name:	./.						
Street:	./.						
Town:	./.						
Country:	./.						

1.6 Test standards

Technical standard : FCC RULES PART 15 SUBPART C § 15.247 (2010-10)



2 Technical test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.	
or	
The deviations as specified in 2.5 were ascertained in the course of the tests performed.	

2.2 Test environment

Temperature:	23 °C
Relative humidity content:	20 75 %
Air pressure:	86 103 kPa
Power supply:	Adaptor (I/P: 100-240V, 50/60 Hz, 0.6A O/P: 5V, 2A)

Extreme conditions parameters: ./.



Registration number: W6M21104-11399-C-1 FCC ID: RXZ-WR861R

2.3 Test Equipment List

No.	Test equipment	Туре	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2010/9/2	2011/9/1
ETSTW-CE 004	ZWEILEITER-V- NETZNACHBILDUNG TWO-LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2011/3/10	2012/3/9
ETSTW-CE 005	Line-Impedance Stabilisation Network	NNBM 8126D	137	Schwarzbeck	2010/9/8	2011/9/7
ETSTW-CE 006	IMPULSBEGRENZER PULSE LIMITER	ESH3-Z2	100226	R&S	2010/5/8	2011/5/7
ETSTW-CE 007	SPECTRUM ANALYZER 5GHz	FSB	849670/001	R&S	Pre-test	Use NCR
ETSTW-CE 008	HF-EICHLEITUNG RF STEP ATTENUATOR 139dB DPSP	334.6010.02	844581/024	R&S	Function	on Test
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2010/7/21	2011/7/20
ETSTW-CE 013	CISPR 22 TWO BALANCED TELECOM PAIRS IMPEDANCE STABILIZATION NETWORK	FCC-TLISN-T4-02	20242	FCC	2010/10/21	2011/10/20
ETSTW-CE 015	CISPR 22 TWO BALANCED TELECOM PAIRS IMPEDANCE STABILIZATION NETWORK	FCC-TLISN-T8-02	20307	FCC	2010/9/6	2011/9/5
ETSTW-CE 016	TWO-LINE V-NETWORK	ENV216	100050	R&S	2011/2/21	2012/2/20
ETSTW-RE 002	Function Generator	33220A	MY43004982	Agilent	Function	on Test
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2010/8/10	2011/8/9
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2010/9/14	2011/9/13
ETSTW-RE 005	EMI TEST RECEIVER	ESVS10	843207/020	R&S	2010/9/2	2011/9/1
ETSTW-RE 010	ABSORBING CLAMP	MDS 21	3469	Schwarzbeck	2010/9/6	2011/9/5
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	Function Test	
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0336	397	K&L	Function	on Test
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2010/10/4	2011/10/3
ETSTW-RE 020	MICROWAVE HORN ANTENNA	AT4002A	306915	AR	Function	on Test
ETSTW-RE 021	SWEEP GENERATOR	SWM05	835130/010	R&S	2010/8/20	2011/8/19
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	EMCO	2010/7/22	2011/7/21
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	EMCO	2011/2/25	2012/2/24
ETSTW-RE 032	Millivoltmeter	URV 55	849086/013	R&S	2010/10/4	2011/10/3
ETSTW-RE 033	WaveRunner 6000A Serise Oscilloscope	WAVERUNNER 6100A	LCRY0604P14508	LeCroy	Function	on Test
ETSTW-RE 034	Power Sensor	URV5-Z4	839313/006	R&S	2010/10/4	2011/10/3
ETSTW-RE 042	Biconical Antenna	HK116	100172	R&S	2011/1/14	2012/1/13
ETSTW-RE 043	Log-Periodic Dipole Antenna	HL223	100166	R&S	2011/4/13	2012/4/12
ETSTW-RE 044	Log-Periodic Antenna	HL050	100094	R&S	2010/5/11	2011/5/10
ETSTW-RE 045	ESA-E SERIES SPECTRUM ANALYZER	E4404B	MY45111242	Agilent	Pre-test	Use NCR
ETSTW-RE 047	PSA SERIES SPECTRUM ANALYZER	E4445A	MY46181369	Agilent	Pre-test	Use NCR
ETSTW-RE 048	Triple Loop Antenna	HXYZ 9170	HXYZ 9170-134	Schwarzbeck	2010/8/30	2011/8/29
ETSTW-RE 049	TRILOG Super Broadband test Antenna	VULB 9160	9160-3185	Schwarzbeck	2011/4/8	2012/4/7



ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2011/3/4	2012/3/3
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2011/3/4	2012/3/3
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2011/3/4	2012/3/3
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2010/6/3	2011/6/2
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2011/3/4	2012/3/3
ETSTW-RE 061	Amplifier Module	CHC 1	None	ETS	2010/9/27	2011/9/26
ETSTW-RE 062	Amplifier Module	CHC 2	None	KMIC	2010/11/30	2011/11/29
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Functi	on Test
ETSTW-RE 065	Amplifier	AMF-6F- 18002650-25-10P	941608	MITEQ	2011/4/8	2012/4/7
ETSTW-RE 066	Highpass Filter	H1G013G1	206015	MICROWAVE CIRCUITS, INC.	2011/3/4	2012/3/3
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	HP	2010/10/7	2011/10/6
ETSTW-RE 073	Power Meter	N1911A	MY45100769	Agilent	2011/1/10	2012/1/9
ETSTW-RE 074	Power Sensor	N1921A	MY45241198	Agilent	2011/1/10	2012/1/9
ETSTW-RE 081	Highpass Filter	H03G13G1	4260-02 DC0428	MICROWAVE CIRCUITS, INC.	2011/3/4	2012/3/3
ETSTW-RE 096	SIGNAL GENERATOR	SMIQ 03B	102274	R&S	2010/5/31	2011/5/30
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2011/3/10	2012/3/9
ETSTW-RE 105	2.4GHz Notch Filter	NO124411	39555	MICROWAVE CIRCUITS, INC.	2011/3/11	2012/3/10
ETSTW-RE 106	Humidity Temperature Meter	TES-1366	091011113	TES	2011/3/24	2012/3/23
ETSTW-RE 111	Log-Periodic Dipole Array Antenna	VULB 9160	9160-3309	Schwarz beck	2010/12/17	2011/12/16
ETSTW-RE 114	2.4GHz Notch Filter	N0124411	473873	MICROWAVE CIRCUITS	2011/1/13	2012/1/12
ETSTW-GSM 002	Universal Radio Communication Tester	CMU 200	109439	R&S	2010/10/7	2011/10/6
ETSTW-GSM 019	Band Reject Filter	WRCTF824/849- 822/851-40 /12+9SS	3	WI	2011/1/14	2012/1/13
ETSTW-GSM 020	Band Reject Filter	WRCD1747/1748- 1743/1752-32/5SS	1	WI	2011/1/14	2012/1/13
ETSTW-GSM 021	Band Reject Filter	WRCD1879.5/1880 .5-1875.5/1884.5- 32/5SS	3	WI	2011/1/14	2012/1/13
ETSTW-GSM 022	Band Reject Filter	WRCT901.9/903.1- 904.25-50/8SS	1	WI	2011/1/14	2012/1/13
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2010/9/20	2011/9/19
ETSTW-Cable 002	Microwave Cable	SUCOFLEX 104 (S_Cable 7)	238093	HUBER+SUHNER	2010/9/27	2011/9/26
ETSTW-Cable 003	Microwave Cable	SUCOFLEX 104 (S_Cable 11)	209953	HUBER+SUHNER	2010/9/27	2011/9/26
ETSTW-Cable 010	BNC Cable	5 M BNC Cable	None	JYE BAO CO.,LTD.	2011/3/8	2012/3/7
ETSTW-Cable 011	BNC Cable	BNC Cable 1	None	JYE BAO CO.,LTD.	Pre-test	Use NCR
ETSTW-Cable 012	BNC Cable	BNC Cable 2	None	JYE BAO CO.,LTD.	2011/3/8	2012/3/7
ETSTW-Cable 013	Microwave Cable	SUCOFLEX 104 (S_Cable 5)	232345	HUBER+SUHNER	Functi	on Test
ETSTW-Cable 022	N TYPE Cable	OATS Cable 3	0002	JYE BAO CO.,LTD.	2011/3/4	2012/3/3
ETSTW-Cable 026	Microwave Cable	SUCOFLEX 104	279075	HUBER+SUHNER	2011/3/10	2012/3/9
ETSTW-Cable 027	Microwave Cable	SUCOFLEX 104	279083	HUBER+SUHNER	2011/3/10	2012/3/9



ETSTW-Cable 028	Microwave Cable	FA147A0015M2020	A0015M2020 30064-2 UTIFLEX		2010/9/13	2011/9/12
ETSTW-Cable 029	Microwave Cable	FA147A0015M2020	30064-3	UTIFLEX	2010/9/13	2011/9/12
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S_Cable 9)	279067	SPECTRUM	2011/3/10	2012/3/9
ETSTW-Cable 031	Microwave Cable	SUCOFLEX 104 (S_Cable 10)	238092	HUBER+SUHNER	2010/11/30	2011/11/29
ETSTW-Cable 039	Microwave Cable	SUCOFLEX 104 (S_Cable 19)	316739	HUBER+SUHNER	2011/3/4	2012/3/3
ETSTW-Cable 043	Microwave Cable	SUCOFLEX 104	317576	HUBER+SUHNER	2010/11/30	2011/11/29
ETSTW-Cable 047	Microwave Cable	SUCOFLEX 104	325518	HUBER+SUHNER	2010/11/30	2011/11/29
ETSTW-Cable 051	BNC Cable	BNC Cable 6	None	JYE BAO CO.,LTD.	2011/3/31	2012/3/30
ETSTW-Cable 052	BNC Cable	Clamp Cable	able None Schwarz beck 20		2011/3/31	2012/3/30
ETSTW-Cable 053	N TYPE To SMA Cable	OATS Cable 4	None	JYE BAO CO.,LTD.	2011/3/4	2012/3/3
ETSTW-Cable 054	BNC To SMA Cable	OATS Cable 5	ATS Cable 5 None JYE BAO CO.,LTD. 2		2011/3/4	2012/3/3
WTSTW-SW 001	SW 001 EMI TEST SOFTWARE Ha		None	EMC PARTNER	HARCS Version 4.16 Firmware Version 2.18	
WTSTW-SW 002	EMI TEST SOFTWARE	EZ_EMC	None Farad		Version I	ETS-03A1
WTSTW-SW 003	EMS TEST SOFTWARE	i2	None	AUDIX	Version 3.2	2007-8-17b
WTSTW-SW 005	GSM Fading Level Correction	GSMFadLevCor	None	R&S	Version 1.66	



2.4 General Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.4-2009 5.2 using a 50µH LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

RADIATION INTERFERENCE: The test procedure used was according to ANSI STANDARD C63.4-2009 6.4 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of $dB\mu V$) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:Freq (MHz)METER READING + ACF + CABLE LOSS (to the receiver) = FS33 $20 \text{ dB}\mu\text{V} + 10.36 \text{ dB} + 6 \text{ dB} = 36.36 \text{ dB}\mu\text{V/m} @3m$

The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table) and arranged according to ANSI C63.4-2009 6.3.1. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

(1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

(2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.

(3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.

(4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

Measurements were made by Worldwide Testing Services(Taiwan) Co., Ltd. at the registered open field test site located at No.5-1, Lishui, Shuang Sing Village, Wanli Dist., New Taipei City 207, Taiwan (R.O.C.). The Registration Number: 930600.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.



When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

The formula is as follows: Average = Peak + Duty Factor Duty Factor = 20 log (dwell time/T) T = 100ms when the pulse train period is over 100 ms or the period of the pulse train.

Modified Limits for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

ANSI STANDARD C63.4-2009 10.2.7: Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.



Registration number: W6M21104-11399-C-1 FCC ID: RXZ-WR861R

3 Test results (enclosure)

TEST CASE	Para. Number	Required	Test passed	Test failed
Peak Output Power	15.247(b)(3)	×	×	
Equivalent radiated Power	15.247(b)(3)	×	×	
Spurious Emissions radiated – Transmitter	15.247(c):	×	×	
operating	15.209			
Band Edge Measurement	15.247(c)	×	X	
Minimum 6 dB Bandwidth	15.247(a)(2)	×	X	
Peak Power Spectral Density	15.247(d)	×	×	
Radiated Emission from Digital Part	15.109			
Power Line Conducted Emission	15.207			

Note:

- 1. This EUT incorporates a MIMO function with IEEE 802.11b, 802.11g, and 802.11n draft 2.0. Physically, this EUT includes two transmitters and two receivers with two incoherent streams. This device uses multiplexing and also employ cyclic delay diversity to improve range and throughput, and this device simultaneously operates on two adjacent channels.
- 2. This EUT is 2*2 spatial MIMO (2Tx&2Rx) without beam forming function. That operates dual chain configuration. The Pre-test was performed to determine the worst case mode from all possible combinations between all available modulations, data rates, bandwidths, and spatial stream modes.
- 3. The worst case mode was base on the investigations by measuring the peak and average power according to the description above. The detail of chosen mode for full testing are as below:

Mode	Available	Chosen	Modulation	Modulation	Data Rate
Mode	channel	Channel	Technology	Туре	(Mbps)
802.11b	1 to 11	1,6,11	DSSS	DBPSK	1
802.11g	1 to 11	1,6,11	OFDM	BPSK	6
Draft 802.11n (20MHz)	1 to 11	1,6,11	OFDM	BPSK	6.5
Draft 802.11n (40MHz)	1 to 7	1,4,7	OFDM	BPSK	13.5

4. Because both antennas operate simultaneously, when performed the relevant conducted measurement(ex. RF output power, peak power spectral density....and so on), we basically use a splitter to combine each antenna port in order to get the total measuring results.




3.1 Peak Output Power (transmitter)

FCC Rule: 15.247(b)(3)


This measurement applies to equipment with an integral antenna and to equipment with an antenna connector and equipped with an antenna as declared by the applicant.

The power was measured with modulation (declared by the applicant).

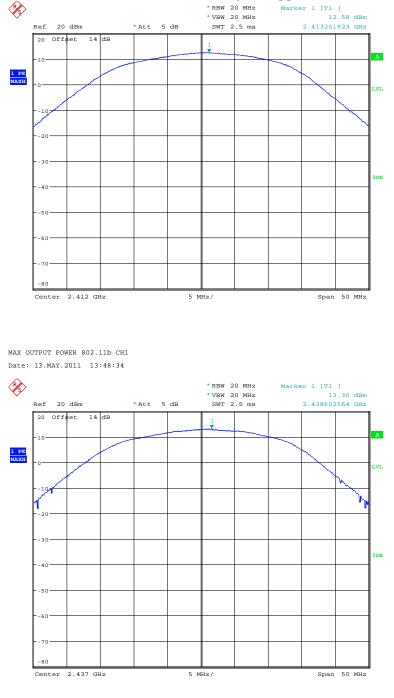


MAX OUTPUT POWER 802.11b CH6 Date: 13.MAY.2011 13:49:20



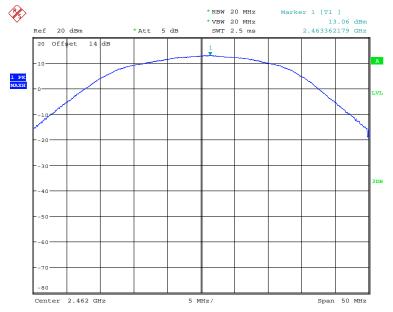


MAX OUTPUT POWER 802.11b CH11 Date: 13.MAY.2011 13:50:08

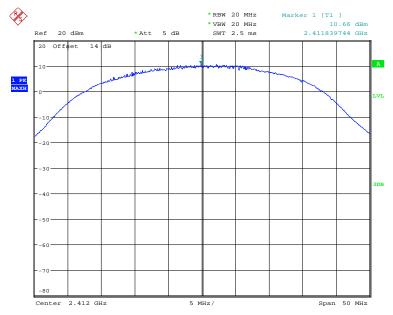


MAX OUTPUT POWER 802.11g CH1 Date: 13.MAY.2011 13:52:06



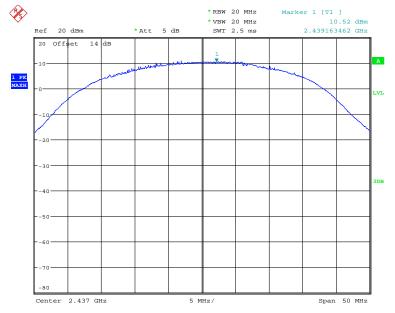


MAX OUTPUT POWER 802.11g CH6 Date: 13.MAY.2011 13:51:42

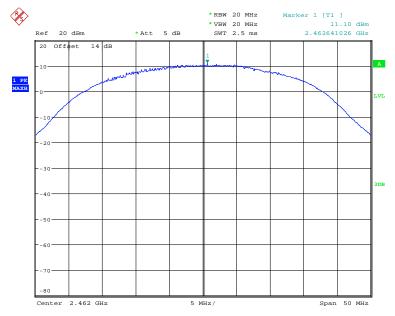


MAX OUTPUT POWER 802.11g CH11 Date: 13.MAY.2011 13:51:14



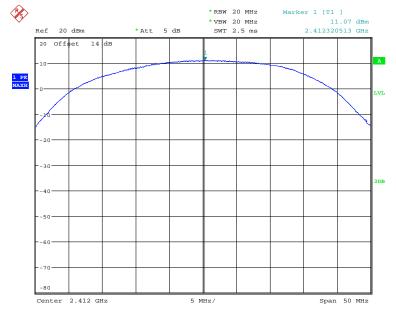


MAX OUTPUT POWER 802.11n 20MHz CH1 Date: 13.MAY.2011 13:53:53

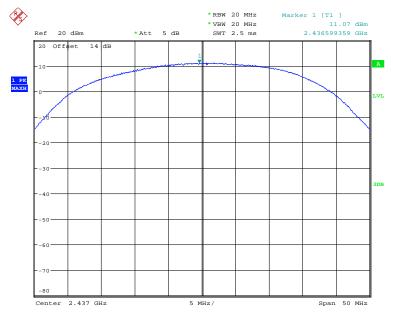


MAX OUTPUT POWER 802.11n 20MHz CH6 Date: 13.MAY.2011 13:54:19



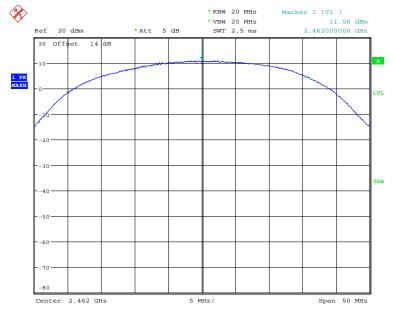


MAX OUTPUT POWER 802.11n 20MHz CH11 Date: 13.MAY.2011 13:54:42

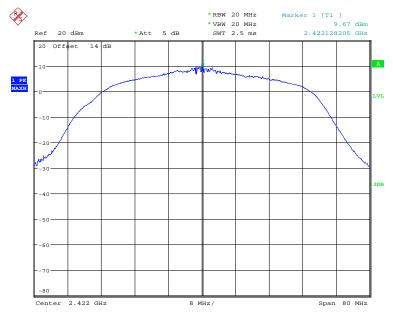


MAX OUTPUT POWER 802.11n 40MHz CH1 Date: 13.MAY.2011 13:55:52



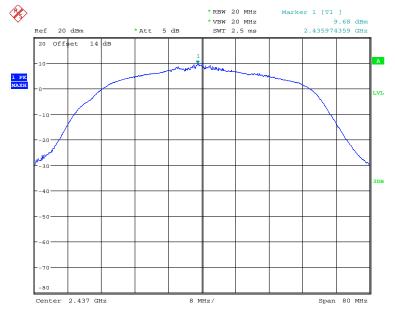

MAX OUTPUT POWER 802.11n 40MHz CH4 Date: 13.MAY.2011 13:56:26

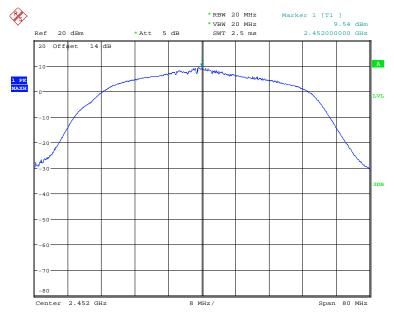

MAX OUTPUT POWER 802.11n 40MHz CH7 Date: 13.MAY.2011 13:56:56



Test condition $T_{nom} =^{\circ}C, V_{nom} =V$	Signal Field strength TX highest power mode dB μ V/m
Frequency [MHz]	

Limits:

Emiles.	
Frequency	Power
MHz	dBm
902 - 928	30
2400 - 2483.5	30
5725 - 5850	30

In case of employing transmitter antennas having antenna gain > 6 dBi and using fixed point-to point operation consider 15.247 (b)(4)

Test equipment used: ETSTW-RE 055



3.2 Equivalent isotropic radiated power

FCC Rule: 15.247(b)(3)

EIRP = max. conducted output power + antenna gain EIRP = 13.30 dBm + 2 dBi = 15.30 dBm Limit: EIRP = +36 dBm for Antenna gain < 6 dBi

Test equipment used: ETSTW-RE 055

3.3 RF Exposure Compliance Requirements

FCC OET Bulletin 65 Edition 97.01 determines the equations for predicting RF fields and applicable limits.

The prediction for power density in the far-field but will over-predict power density in the near field, where it could be used for walking a "worst case" or conservative prediction.

S – Power Density

P – Output power ERP

R – Distance

 $D-Cable\ Loss$

AG – Antenna Gain

Item	Unit	Value	Remarks
Р	mW	21.379	Peak value
D	dB		
AG	dBi	2	
G		1.58	Calculated Value
R	cm	20	Assumed value
S	mW/cm ²	0.0067	Calculated value

Limits:

Limit for General Population / Uncontrolled Exposure					
Frequency (MHz)	Power Density (mW/cm ²)				
1500 - 100.000	1.0				



3.4 Transmitter Radiated Emissions in Restricted Bands

FCC Rules: 15.247 (c), 15.205, 15.209, 15.35 Radiated emission measurements were performed from 30 MHz to 26500 MHz. For radiated emission tests, the analyzer setting was as followings:

Frequency ≤ 1 GHz, RBW:100 kHz, VBW: 100 kHz (Peak measurements) Frequency > 1 GHz, RBW: 1 MHz, VBW: 1 MHz (Peak measurements) Frequency > 1 GHz, RBW:1 MHz, VBW: 10 Hz (Average measurements)

Limits.

For frequencies below 1GHz:

Frequency of Emission	Field strength	Field Strength
(MHz)	(microvolts/meter)	(dB microvolts/meter)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above	500	54.0

For frequencies above 1GHz (Average measurements).

Guidance on Measurement of Digit Transmission Systems:

"If the emission is pulsed, modify the unit for continuous operation, use the setting shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation."

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty cycle correction = 20 log (dwell time/ 100ms)

Note: No duty cycle correction was added to the reading of this EUT.

Explanation: see attached diagrams in Appendix.



3.5 Spurious Emissions (tx)

Spurious emission was measured with modulation (declared by manufacturer).

In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))

FCC Rule: 15.247(c), 15.35

For out of band emissions that are close to or that exceed the 20 dB attenuation requirement described in the specification, radiated measurements were performed at a 3 m separation distance to determine whether these emissions complied with the general radiated emission requirement.

Limits:

For frequencies above 1GHz (Peak measurements). Modified Limit for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

For frequencies above 1GHz (Average measurements). Max. reading – 20dB

Max. reading – 20 dB

Guidance on Measurement of Digit Transmission Systems:

"If the emission is pulsed, modify the unit for continuous operation, use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation."

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty Cycle correction = 20 log (dwell time/100ms)

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 018, ETSTW-RE 028, ETSTW-RE 029, ETSTW-RE 030, ETSTW-RE 044

Note: No duty cycle correction was added to the reading of EUT.



SAMPLE CALCULATION OF LIMIT. All results will be updated by an automatic measuring system in accordance with point 2.3.

Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

The peak and average spurious emission plots was measured with the average limits. In the Table being listed the critical peak and average value and exhibit the compliance with the above calculated Limits.

If in the column's correction factor states a value then the max. Field strength in the same row is corrected by a value gained from the "Correction Factor".

Model: Mode: Polarization:	WR86 802.11t Horizo	CH1 7	Date: Temperature: Humidity:	2011/ 22.1 60	/5/13 °C %	Engin	eer:	Kevin
Frequency (MHz)	Reading (dBm) Peak	Factor (dB) Corr.	Result (dBm)		mit 3m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
273.4870	11.80	peak	15.24	27	.04	46.00	-18.96	200
976.1523	5.72	peak	27.80	33	.52	54.00	-20.48	210

Polarization:	Horizontal
---------------	------------

Frequency	Read (dBi		Factor (dB)	Resi (dBuV	Liı (dBu	nit V/m)	Margin	Table Degree	Ant. High
(MHz)	Peak	Ave.	Corr.		Peak		(dB)	(Deg.)	(cm)
4817.6350	43.08		4.57	47.65	 74.00	54.00	-26.35	220	100
7236.0000	40.28		6.93	47.21	 74.00	54.00	-26.79	130	100
9648.0000	34.80		9.49	44.29	 74.00	54.00	-29.71	60	100
12060.0000	34.50		13.62	48.12	 74.00	54.00	-25.88	310	100

Polarization:	Vertical						
Frequency	Reading	Factor	Result	Limit	Margin	Table	Ant.
	(dBm)	(dB)	(dBm)	(dBm)		Degree	High
(MHz)	Peak	Corr.	(ubiii)	(ubiii)	(dB)	(Deg.)	(cm)
273.4870	8.42	peak	15.24	23.66	46.00	-22.34	240
978.9580	4.29	peak	27.81	32.10	54.00	-21.90	300

Polarization: Vertical

Frequency	Read (dBi		Factor (dB)	Res (dBu		Liı (dBu	nit V/m)	Margin	Table Degree	
(MHz)	Peak	Áve.	Corr.	· ·	Avé.	Peak		(dB)	(Deg.)	(cm)
4817.6350	48.00	46.79	4.57	52.57	51.36	74.00	54.00	-2.64	170	100
7236.0000	40.47		6.93	47.40		74.00	54.00	-26.60	110	100
9648.0000	34.52		9.49	44.01		74.00	54.00	-29.99	310	100
12060.0000	32.68		13.62	46.30		74.00	54.00	-27.70	60	100



Registration number: W6M21104-11399-C-1 FCC ID: RXZ-WR861R

Mode:	802.11b (CH6					
Polarization:	Horizontal						
Frequency	Reading	Factor	Result	Limit	Margin	Table	Ant.
	(dBm)	(dB)	(dBm)	(dBm)		Degree	High
(MHz)	Peak	Corr.	(uDIII)	(uDIII)	(dB)	(Deg.)	(cm)
273.4870	12.18	peak	15.24	27.42	46.00	-18.58	270
984.5691	5.08	peak	27.83	32.91	54.00	-21.09	220

_	Polarization:	Horizonta	l								
	Frequency	Read	ling	Factor	Resi	ılt	Liı	nit	Margin	Table	Ant.
		(dBu	ıV)	(dB)	(dBuV	′/m)	(dBu	V/m)	-	Degree	High
	(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
	4873.7480	42.28		4.59	46.87		74.00	54.00	-27.13	220	100
	7311.0000	40.02		6.93	46.95		74.00	54.00	-27.05	340	100
	9748.0000	33.68		9.63	43.31		74.00	54.00	-30.69	240	100
	12185.0000	33.89		14.66	48.55		74.00	54.00	-25.45	130	100

Polarization:	Vertical						
Frequency	Reading	Factor	Result	Limit	Margin	Table	Ant.
	(dBm)	(dB)	(dBm)	(dBm)	_	Degree	High
(MHz)	Peak	Corr.	(ubiii)	(ubiii)	(dB)	(Deg.)	(cm)
108.9980	22.01	peak	12.93	34.94	43.50	-8.56	260
990.1804	5.05	peak	27.85	32.90	54.00	-21.10	170

Polarization:	Vertical									
Frequency	Reading Factor			Res	Result		mit	Margin	Table	Ant.
	(dBı	ıV)	(dB)	(dBu	(dBuV/m)		V/m)	-	Degree	High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4873.7480	48.61	47.33	4.59	53.20	51.92	74.00	54.00	-2.08	165	100
7311.0000	40.93		6.93	47.86		74.00	54.00	-26.14	130	100
9748.0000	32.95		9.63	42.58		74.00	54.00	-31.42	270	100
12185.0000	33.30		14.66	47.96		74.00	54.00	-26.04	160	100


Mode:	802.11b CH11
Delarization	Llorizontal

Polarization:	Horizontal						
Frequency	Reading	Factor	Dogult	Limit	Margin	Table	Ant.
	(dBm)	(dB)	Result	-	Ũ	Degree	High
(MHz)	Peak	Corr.	(dBm)	(dBm)	(dB)	(Deg.)	(cm)
261.5832	12.87	peak	14.79	27.66	46.00	-18.34	240
990.1804	7.33	peak	27.85	35.18	54.00	-18.82	220

Polarization: Horizontal

Frequency	Reading I		Factor	Result		Limit		Margin	Table	Ant.
	(dBuV)		(dB)	(dBuV/m)		(dBuV/m)		-	Degree	High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4921.8440	42.37		4.67	47.04		74.00	54.00	-26.96	310	100
7386.0000	40.42		6.84	47.26		74.00	54.00	-26.74	60	100
9848.0000	34.58		9.77	44.35		74.00	54.00	-29.65	220	100
12310.0000	33.57		14.27	47.84		74.00	54.00	-26.16	60	100





Polarization: Vertical											
Frequency	Reading	Factor	Result	Limit	Margin	Table	Ant.				
	(dBm)	(dB)	(dBm)	(dBm)		Degree	High				
(MHz)	Peak	Corr.	(ubiii)	(ubiii)	(dB)	(Deg.)	(cm)				
108.9980	18.55	peak	12.93	31.48	43.50	-12.02	300				
981.7635	4.53	peak	27.82	32.35	54.00	-21.65	50				

Polarization: Vertical

Frequency	Reading (dBuV)		Factor (dB)			Limit (dBuV/m)		Margin	Table Degree	
(MHz)	Peak	Ave.	Corr.	· ·		Peak	/	(dB)	(Deg.)	(cm)
4921.8440	47.68	46.28	4.67	52.35	50.95	74.00	54.00	-3.05	160	100
7386.0000	40.01		6.84	46.85		74.00	54.00	-27.15	310	100
9848.0000	32.95		9.77	42.72		74.00	54.00	-31.28	50	100
12310.0000	31.65		14.27	45.92		74.00	54.00	-28.08	130	100

Mode: 802.11g CH1

Polarization: Horizontal

1 olunzution.	Homzontai						
Frequency	Reading	Factor	Result	Limit	Margin	Table	Ant.
	(dBm)	(dB)	(dBm)	(dBm)		Degree	High
(MHz)	Peak	Corr.	(uDIII)	(ubiii)	(dB)	(Deg.)	(cm)
273.4870	12.14	peak	15.24	27.38	46.00	-18.62	260
973.3467	4.89	peak	27.79	32.68	54.00	-21.32	130

Polarization: Horizontal

Frequency	Reading (dBuV)		Factor (dB)			Limit (dBuV/m)		Margin	Table Degree	
(MHz)	Peak	Áve.	Corr.	Peak	Avé.	Peak	Ave.	(dB)	(Deg.)	(cm)
4824.0000	41.31		4.57	45.88		74.00	54.00	-28.12	110	100
7236.0000	40.42		6.93	47.35		74.00	54.00	-26.65	60	100
9648.0000	34.66		9.49	44.15		74.00	54.00	-29.85	170	100
12060.0000	32.72		13.62	46.34		74.00	54.00	-27.66	220	100

Polarization: Vertical

Frequency (MHz)	Reading (dBm) Peak	Factor (dB) Corr.	Result (dBm)	Limit (dBm)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
108.9980	18.55	peak	12.93	31.48	43.50	-12.02	300
976.1523	4.44	peak	27.80	32.24	54.00	-21.76	210

Polarization: Vertical

Frequency	Reading I (dBuV)		Factor (dB)	Result (dBuV/m)		Limit (dBuV/m)		Margin	Table Degree	Ant. High
(MHz)	Peak	Áve.	Corr.	\ \		Peak		(dB)	(Deg.)	(cm)
4817.6350	43.23		4.57	47.80		74.00	54.00	-26.20	160	100
7236.0000	39.78		6.93	46.71		74.00	54.00	-27.29	210	100
9648.0000	35.49		9.49	44.98		74.00	54.00	-29.02	210	100
12055.1100	34.44		13.58	48.02		74.00	54.00	-25.98	170	100



Registration number: W6M21104-11399-C-1 FCC ID: RXZ-WR861R

Mode:	802.11g	J CH6					
Polarization:	Horizontal						
Frequency	Reading	Factor	Result	Limit	Margin	Table	Ant.
	(dBm)	(dB)	(dBm)	(dBm)		Degree	High
(MHz)	Peak	Corr.	(uDIII)	(uDIII)	(dB)	(Deg.)	(cm)
273.4870	11.35	peak	15.24	26.59	46.00	-19.41	240
970.5411	4.78	peak	27.79	32.57	54.00	-21.43	220

Polarization: Horizontal

Frequency	Reading (dBuV)		Factor (dB)	Result (dBuV/m)		Limit (dBuV/m)		Margin	Table Degree	
(MHz)	Peak	Áve.	Corr.	Peak	Avé.	Peak	Ave.	(dB)	(Deg.)	(cm)
4874.0000	39.78		4.59	44.37		74.00	54.00	-29.63	270	100
7311.0000	39.68		6.93	46.61		74.00	54.00	-27.39	110	100
9748.0000	32.71		9.63	42.34		74.00	54.00	-31.66	260	100
12185.0000	32.25		14.66	46.91		74.00	54.00	-27.09	110	100

Polarization:	Vertical						
Frequency	Reading	Factor	Result	Limit	Margin	Table	Ant.
	(dBm)	(dB)	(dBm)	(dBm)		Degree	High
(MHz)	Peak	Corr.	(ubiii)	(ubiii)	(dB)	(Deg.)	(cm)
108.9980	21.32	peak	12.93	34.25	43.50	-9.25	160
985.9720	5.52	peak	27.84	33.36	54.00	-20.64	130

Polarization:	Vertical									
Frequency	Read	ling	Factor	Resi	ılt	Liı	nit	Margin	Table	Ant.
	(dBu	ıV)	(dB)	(dBuV/m)		(dBuV/m)		-	Degree	High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4874.0000	40.77		4.59	45.36		74.00	54.00	-28.64	230	100
7311.0000	39.31		6.93	46.24		74.00	54.00	-27.76	170	100
9748.0000	33.69		9.63	43.32		74.00	54.00	-30.68	220	100
12185.0000	32.12		14.66	46.78		74.00	54.00	-27.22	270	100

Mode:	802.11g CH11
-------	--------------

	0020						
Polarization:	Horizontal						
Frequency	Reading	Factor	Result	Limit	Margin	Table	Ant.
	(dBm)	(dB)	(dBm)	(dBm)		Degree	High
(MHz)	Peak	Corr.	(uDIII)	(uDIII)	(dB)	(Deg.)	(cm)
108.9980	15.81	peak	12.93	28.74	43.50	-14.76	150
994.3888	4.81	peak	27.86	32.67	54.00	-21.33	230

Polarization: Horizontal

Frequency	Reading		Factor	Result		Limit		Margin	Table	Ant.
	(dBuV)		(dB)	(dBuV/m)		(dBuV/m)		-	Degree	High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4924.0000	40.79		4.68	45.47		74.00	54.00	-28.53	60	100
7386.0000	40.20		6.84	47.04		74.00	54.00	-26.96	130	100
9848.0000	31.83		9.77	41.60		74.00	54.00	-32.40	260	100
12310.0000	30.94		14.27	45.21		74.00	54.00	-28.79	110	100



Registration number: W6M21104-11399-C-1 FCC ID: RXZ-WR861R

Polarization:	Vertical						
Frequency	Reading	Factor	Dogult	Limit	Margin	Table	Ant.
	(dBm)	(dB)	Result		Ũ	Degree	High
(MHz)	Peak	Corr.	(dBm)	(dBm)	(dB)	(Deg.)	(cm)
108.9980	20.50	peak	12.93	33.43	43.50	-10.07	230
984.5691	4.45	peak	27.83	32.28	54.00	-21.72	220

Polarization: Vertical

Frequency	Reading		Factor	Result		Limit		Margin	Table	Ant.
	(dBuV)		(dB)	(dBuV/m)		(dBuV/m)			Degree	High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4921.8440	41.68		4.67	46.35		74.00	54.00	-27.65	260	100
7386.0000	39.48		6.84	46.32		74.00	54.00	-27.68	190	100
9848.0000	33.94		9.77	43.71		74.00	54.00	-30.29	220	100
12310.0000	31.29		14.27	45.56		74.00	54.00	-28.44	260	100

Mode:	802.11n 20M CH1

Polarization: Horizontal

Frequency (MHz)	Reading (dBm) Peak	Factor (dB) Corr.	Result (dBm)	Limit (dBm)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
108.9980	15.71	peak	12.93	28.64	43.50	-14.86	130
987.3747	4.93	peak	27.84	32.77	54.00	-21.23	230

Polarization:	Horizonta	l								
Frequency	Read	ling	Factor	Resi	ılt	Liı	nit	Margin	Table	Ant.
	(dBı	ıV)	(dB)	(dBuV	//m)	(dBu	V/m)	U	Degree	High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4824.0000	40.89		4.57	45.46		74.00	54.00	-28.54	110	100
7236.0000	41.04		6.93	47.97		74.00	54.00	-26.03	40	100
9648.0000	34.09		9.49	43.58		74.00	54.00	-30.42	170	100
12060.0000	32.45		13.62	46.07		74.00	54.00	-27.93	215	100

Polarization:	Vertical						
Frequency	Reading	Factor	Result	Limit	Margin	Table	Ant.
	(dBm)	(dB)	(dBm)	(dBm)	_	Degree	High
(MHz)	Peak	Corr.	(ubiii)	(ubiii)	(dB)	(Deg.)	(cm)
108.9980	19.91	peak	12.93	32.84	43.50	-10.66	170
995.7916	5.17	peak	27.87	33.04	54.00	-20.96	220

Polarization: Vertical

Frequency	Read	ling	Factor	Resu	ılt	Lir	nit	Margin	Table	Ant.
	(dBı	ıV)	(dB)	(dBuV	//m)	(dBu	V/m)		Degree	High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4825.6510	42.75		4.57	47.32		74.00	54.00	-26.68	230	100
7230.4610	41.28		6.93	48.21		74.00	54.00	-25.79	60	100
9648.0000	33.23		9.49	42.72		74.00	54.00	-31.28	220	100
12060.0000	32.24		13.62	45.86		74.00	54.00	-28.14	300	100



Registration number: W6M21104-11399-C-1 FCC ID: RXZ-WR861R

Mode:	802.11n 2	20M CH6					
Polarization:	Horizontal						
Frequency	Reading	Factor	Result	Limit	Margin	Table	Ant.
	(dBm)	(dB)	(dBm)	(dBm)		Degree	High
(MHz)	Peak	Corr.	(uDIII)	(ubiii)	(dB)	(Deg.)	(cm)
273.4870	11.67	peak	15.24	26.91	46.00	-19.09	210
988.7776	5.07	peak	27.84	32.91	54.00	-21.09	260

Polarization: Horizontal

Frequency	Read (dBi		Factor (dB)	Resi (dBuV			nit V/m)	Margin	Table Degree	
(MHz)	Peak	Áve.	Corr.	Peak	Avé.	Peak	Ave.	(dB)		(cm)
4874.0000	39.94		4.59	44.53		74.00	54.00	-29.47	260	100
7311.0000	39.60		6.93	46.53		74.00	54.00	-27.47	330	100
9748.0000	32.94		9.63	42.57		74.00	54.00	-31.43	170	100
12185.0000	32.63		14.66	47.29		74.00	54.00	-26.71	40	100

Polarization: Vertical

Frequency	Reading	Factor	Result	Limit	Margin	Table	Ant.
	(dBm)	(dB)	(dBm)	(dBm)		Degree	High
(MHz)	Peak	Corr.	(abiii)	(uDIII)	(dB)	(Deg.)	(cm)
108.9980	23.26	peak	12.93	36.19	43.50	-7.31	240
984.5691	5.00	peak	27.83	32.83	54.00	-21.17	200

Polarization:	Vertical									
Frequency	Read	ling	Factor	Res	ult	Liı	nit	Margin	Table	Ant.
	(dBı	ıV)	(dB)	(dBu'	V/m)	(dBu	V/m)		Degree	High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4874.0000	40.94		4.59	45.53		74.00	54.00	-28.47	210	100
7311.0000	40.33		6.93	47.26		74.00	54.00	-26.74	60	100
9748.0000	33.05		9.63	42.68		74.00	54.00	-31.32	240	100
12185.0000	31.49		14.66	46.15		74.00	54.00	-27.85	60	100

Mode: 802.11n 20M CH11

Polarization:	Horizontal						
Frequency	Reading	Factor	Result	Limit	Margin	Table	Ant.
	(dBm)	(dB)	(dBm)		-	Degree	High
(MHz)	Peak	Corr.	(ubiii)	(dBm)	(dB)	(Deg.)	(cm)
108.9980	14.84	peak	12.93	27.77	43.50	-15.73	130
978.9580	4.74	peak	27.81	32.55	54.00	-21.45	310

Polarization: Horizontal

Frequency	Read	ling	Factor	Resi	ılt	Liı	nit	Margin	Table	Ant.
	(dBu	ıV)	(dB)	(dBuV	′/m)	(dBu	V/m)	-	Degree	High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4924.0000	40.65		4.68	45.33		74.00	54.00	-28.67	220	100
7386.0000	39.78		6.84	46.62		74.00	54.00	-27.38	60	100
9848.0000	33.58		9.77	43.35		74.00	54.00	-30.65	220	100
12310.0000	31.69		14.27	45.96		74.00	54.00	-28.04	70	100



Registration number: W6M21104-11399-C-1 FCC ID: RXZ-WR861R

Polarization:	Vertical						
Frequency	Reading (dBm)	Factor (dB)	Result	Limit	Margin	Table Degree	Ant. High
(MHz)	Peak	Corr.	(dBm)	(dBm)	(dB)	(Deg.)	(cm)
108.9980	22.34	peak	12.93	35.27	43.50	-8.23	270
976.1523	4.76	peak	27.80	32.56	54.00	-21.44	240

Polarization: Vertical

Frequency	Read	ling	Factor	Resi	ılt	Liı	nit	Margin	Table	Ant.
	(dBı	ıV)	(dB)	(dBuV	//m)	(dBu	V/m)		Degree	High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4924.0000	40.54		4.68	45.22		74.00	54.00	-28.78	220	100
7386.0000	39.29		6.84	46.13		74.00	54.00	-27.87	80	100
9848.0000	33.96		9.77	43.73		74.00	54.00	-30.27	60	100
12310.0000	33.02		14.27	47.29		74.00	54.00	-26.71	110	100

Polarization:	Horizontal
Frequency	Reading

Frequency (MHz)	Reading (dBm) Peak	Factor (dB) Corr.	Result (dBm)	Limit (dBm)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
273.4870	12.19	peak	15.24	27.43	46.00	-18.57	130
997.1944	4.63	peak	27.87	32.50	54.00	-21.50	260

Polarization:	Horizonta	l								
Frequency		Reading F		Result		Limit		Margin		Ant.
	(dBu	ıV)	(dB)	(dBuV	//m)	(dBu	V/m)		Degree	High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4841.6830	42.07		4.58	46.65		74.00	54.00	-27.35	310	100
7266.0000	39.24		6.94	46.18		74.00	54.00	-27.82	160	100
9688.0000	34.07		9.51	43.58		74.00	54.00	-30.42	130	100
12110.0000	33.28		14.00	47.28		74.00	54.00	-26.72	170	100

Polarization:	Vertical						
Frequency	Reading (dBm)	Factor	Result	Limit	Margin		Ant.
(MHz)	(dBm) Peak	(dB) Corr.	(dBm)	(dBm)	(dB)	Degree (Deg.)	High (cm)
108.9980	21.24	peak	12.93	34.17	43.50	-9.33	250
990.1804	5.58	peak	27.85	33.43	54.00	-20.57	300

Polarization: Vertical

Frequency	Reading		Factor	Result		Limit		Margin	Table	Ant.
	(dBı	ıV)	(dB)	(dBuV	//m)	(dBu	V/m)		Degree	High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4844.0000	39.60		4.58	44.18		74.00	54.00	-29.82	230	100
7266.0000	38.59		6.94	45.53		74.00	54.00	-28.47	170	100
9688.0000	33.23		9.51	42.74		74.00	54.00	-31.26	160	100
12110.0000	33.14		14.00	47.14		74.00	54.00	-26.86	300	100



Registration number: W6M21104-11399-C-1 FCC ID: RXZ-WR861R

Mode:	802.11n 4	40M CH4					
Polarizatio	on: Horizontal						
Frequence	y Reading	Factor	Result	Limit	Margin	Table	Ant.
	(dBm)	(dB)	(dBm)	(dBm)		Degree	High
(MHz)	Peak	Corr.	(uDIII)	(uDIII)	(dB)	(Deg.)	(cm)
273.487	0 11.46	peak	15.24	26.70	46.00	-19.30	160
973.346	7 4.83	peak	27.79	32.62	54.00	-21.38	230

Polarization: Horizontal

Frequency	Reading		Factor	Result		Limit		Margin	Table	Ant.
	(dBuV)		(dB)	(dBuV/m)		(dBuV/m)			Degree	High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4874.0000	39.99		4.59	44.58		74.00	54.00	-29.42	160	100
7311.0000	39.31		6.93	46.24		74.00	54.00	-27.76	220	100
9748.0000	33.27		9.63	42.90		74.00	54.00	-31.10	160	100
12185.0000	33.43		14.66	48.09		74.00	54.00	-25.91	290	100

Polarization:	Vertical						
Frequency	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin	Table Degree	Ant. High
(MHz)	Peak	Corr.	(ubiii)	(ubiii)	(dB)	(Deg.)	(cm)
108.9980	22.68	peak	12.93	35.61	43.50	-7.89	230
990.1804	4.40	peak	27.85	32.25	54.00	-21.75	240

Polarization:	Vertical									
Frequency	Read	ling	Factor	Resi	ılt	Liı	mit	Margin	Table	Ant.
	(dBı	JV)	(dB)	(dBuV	′/m)	(dBu	V/m)	•	Degree	High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4874.0000	39.87		4.59	44.46		74.00	54.00	-29.54	260	100
7311.0000	40.21		6.93	47.14		74.00	54.00	-26.86	110	100
9748.0000	33.20		9.63	42.83		74.00	54.00	-31.17	80	100
12185.0000	31.74		14.66	46.40		74.00	54.00	-27.60	130	100

Mode: 802.11n 40M CH7

Polarization:	Horizontal						
Frequency	Reading	Factor	Dogult	Limit	Margin	Table	Ant.
	(dBm)	(dB)	Result		U	Degree	High
(MHz)	Peak	Corr.	(dBm)	(dBm)	(dB)	(Deg.)	(cm)
108.9980	15.04	peak	12.93	27.97	43.50	-15.53	220
980.3607	5.20	peak	27.82	33.02	54.00	-20.98	310

Polarization: Horizontal

Frequency	Reading Fac		Factor	Result				Margin	Table	Ant.
	(dBu	ıV)	(dB)	(dBuV	//m)	(dBu	V/m)		Degree	High
(MHz)	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	(dB)	(Deg.)	(cm)
4904.0000	40.82		4.61	45.43		74.00	54.00	-28.57	230	100
7356.0000	38.26		6.87	45.13		74.00	54.00	-28.87	170	100
9808.0000	33.22		9.75	42.97		74.00	74.00	-31.03	260	100
12260.0000	31.93		14.47	46.40		74.00	54.00	-27.60	110	100



Registration number: W6M21104-11399-C-1 FCC ID: RXZ-WR861R

Polarization:	Vertical				-		
Frequency (MHz)	Reading (dBm) Peak	Factor (dB) Corr.	Result (dBm)	Limit (dBm)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
108.9980	21.51	peak	12.93	34.44	43.50	-9.06	220
974.7495	4.83	peak	27.80	32.63	54.00	-21.37	230

Polarization: Vertical

Frequency	Reading (dBuV)		Factor (dB)	Result (dBuV/m)		Limit (dBuV/m)		Margin	Table Degree	
(MHz)	Peak	Ave.	Corr.			Peak		(dB)		(cm)
4904.0000	40.39		4.61	45.00		74.00	54.00	-29.00	170	100
7356.0000	39.02		6.87	45.89		74.00	54.00	-28.11	290	100
9808.0000	34.42		9.75	44.17		74.00	74.00	-29.83	190	100
12260.0000	31.46		14.47	45.93		74.00	54.00	-28.07	320	100

Note 1. Correction Factor = Antenna factor + Cable loss - Preamplifier

2. The formula of measured value as: Test Result = Reading + Correction Factor

3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average

4. All not in the table noted test results are more than 20 dB below the relevant limits.

5. See the attached diagram as appendix.

TEST RESULT (Transmitter): The unit DOES meet the FCC requirements.


Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 018, ETSTW-RE 028, ETSTW-RE 029, ETSTW-RE 030, ETSTW-RE 044



3.6 Radiated Emission on the band edge


According to FCC rules part 15 subpart C §15.247(c) in any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required.

In addition radiated emission which fall in the restricted bands, as defined in section 15.205(a), must also with the radiated emission limits.

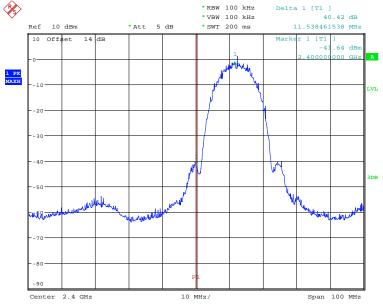


FREQENCY RANGE 802.11b CH1 Date: 13.MAY.2011 14:26:56



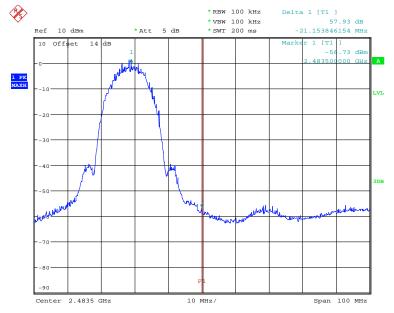


FREQENCY RANGE 802.11b CH11 Date: 13.MAY.2011 14:19:17

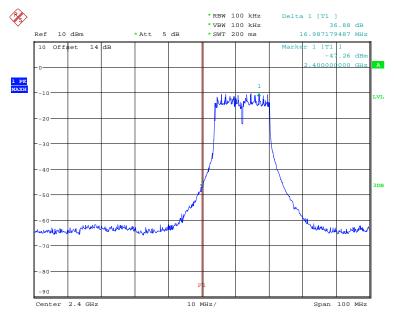


FREQENCY RANGE 802.11g CH1 Date: 13.MAY.2011 14:26:19



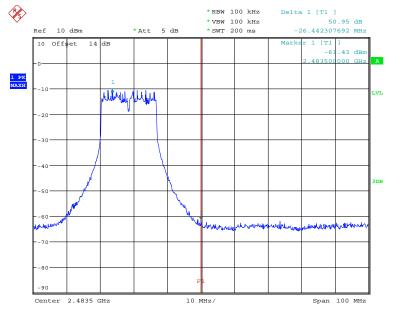


FREQENCY RANGE 802.11g CH11 Date: 13.MAY.2011 14:20:21

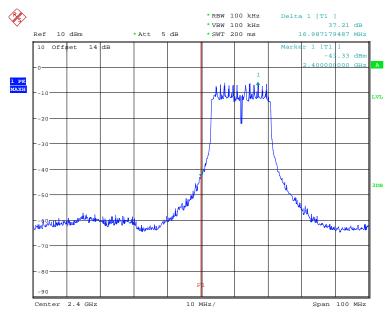


FREQENCY RANGE 802.11n 20MHz CH1 Date: 13.MAY.2011 14:25:39



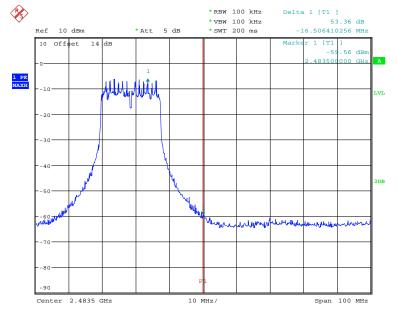


FREQENCY RANGE 802.11n 20MHz CH11 Date: 13.MAY.2011 14:22:17

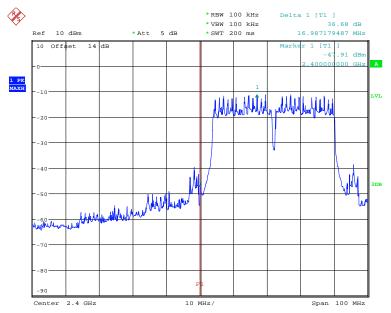

FREQENCY RANGE 802.11n 40MHz CH1 Date: 13.MAY.2011 14:24:47



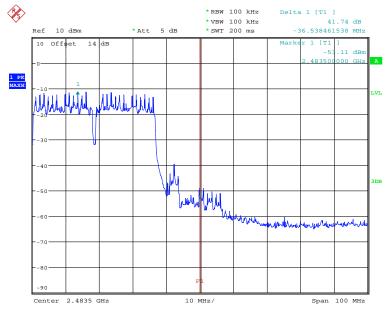

FREQENCY RANGE 802.11n 40MHz CH7 Date: 13.MAY.2011 14:24:14

Limit:

Frequency Range / MHz	Limit
902 –928	
2400 - 2483.5	- 20 dB
5725 - 5850	


Test equipment used: ETSTW-RE 055



3.7 Minimum 6 dB Bandwidth


The analyzer ResBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK reading was taken, two markers were set 6 dB below the maximum level on the right and the left side of the emission.

The 6 dB bandwidth is the frequency difference between the two markers. × *RBW 100 kHz Delta 1 [T1] * VBW 100 kHz 0.07 dF * SWT 200 ms 10.544871795 MHz Ref 10 dBm Att 10 Offset 14 dB 66 dB 41 GH 4067 win urp how 2 [Т] mm Λ 1 PK MAXH Mr. 52 dB 10 And Why ly 20 -80 Center 2.412 GHz 2 MHz/ Span 20 MHz

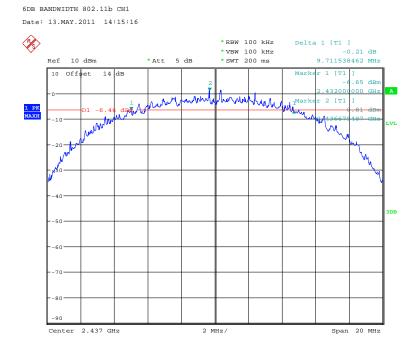


6DB BANDWIDTH 802.11b CH6 Date: 13.MAY.2011 14:16:11



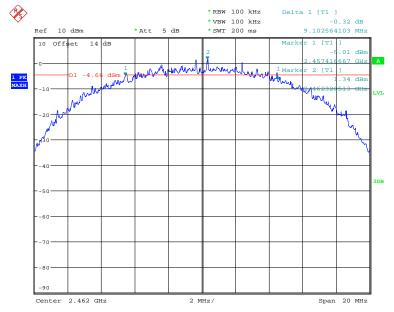


⁶DB BANDWIDTH 802.11b CH11 Date: 13.MAY.2011 14:17:14

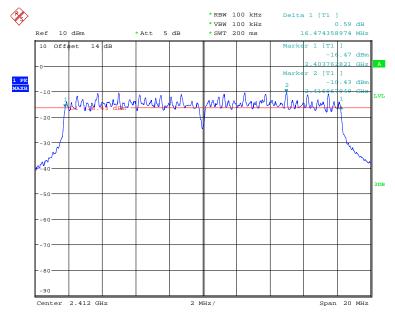


6DB BANDWIDTH 802.11g CH1 Date: 13.MAY.2011 14:14:08



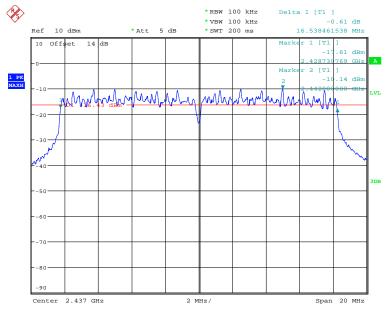


⁶DB BANDWIDTH 802.11g CH6 Date: 13.MAY.2011 14:13:20

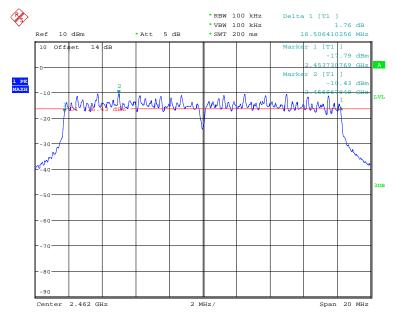


6DB BANDWIDTH 802.11g CH11 Date: 13.MAY.2011 14:12:44



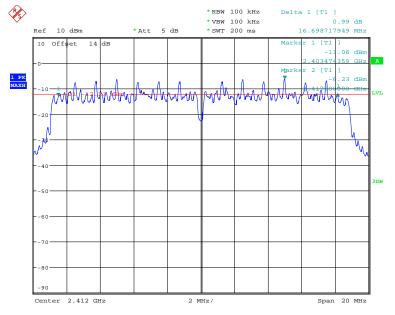


⁶DB BANDWIDTH 802.11n 20MHz CH1 Date: 13.MAY.2011 14:09:57

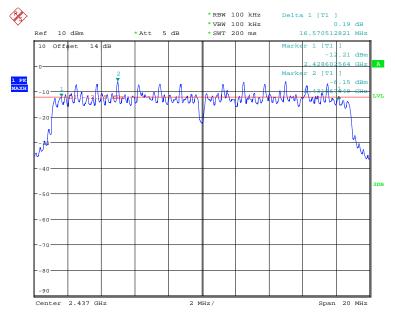


⁶DB BANDWIDTH 802.11n 20MHz CH6 Date: 13.MAY.2011 14:08:47



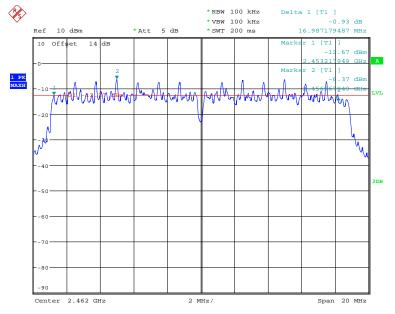


⁶DB BANDWIDTH 802.11n 20MHz CH11 Date: 13.MAY.2011 14:11:32

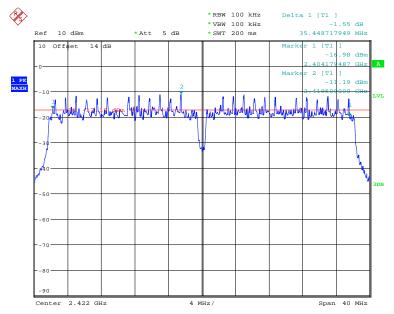


⁶DB BANDWIDTH 802.11n 40MHz CH1 Date: 13.MAY.2011 14:05:55



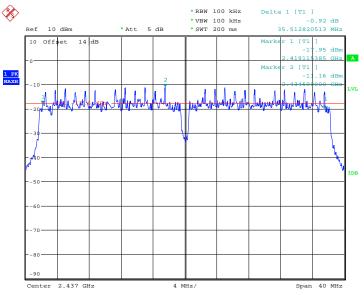

⁶DB BANDWIDTH 802.11n 40MHz CH4 Date: 13.MAY.2011 14:04:53

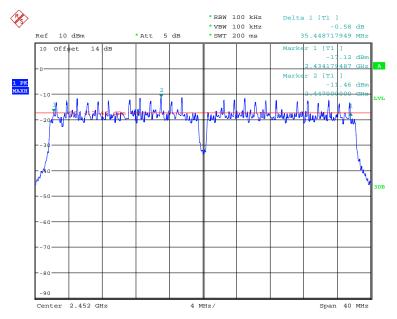

6DB BANDWIDTH 802.11n 40MHz CH7 Date: 13.MAY.2011 14:02:59

Limits:

Frequency Range MHz	Limits
902-928	min 500 kHz
2400-2483.5	min 500 kHz
5725-5850	min 500 kHz


Test equipment used: ETSTW-RE 055



3.8 Peak Power Spectral Density


Peak Power Spectral density is a measured at low, middle and high channel.


The peak output power is measured with a measurement bandwidth of 10 MHz and displayed on diagram together with Peak Power Spectral Density result which was measured with a bandwidth of 3 kHz, appreciate frequency span and sweep time.

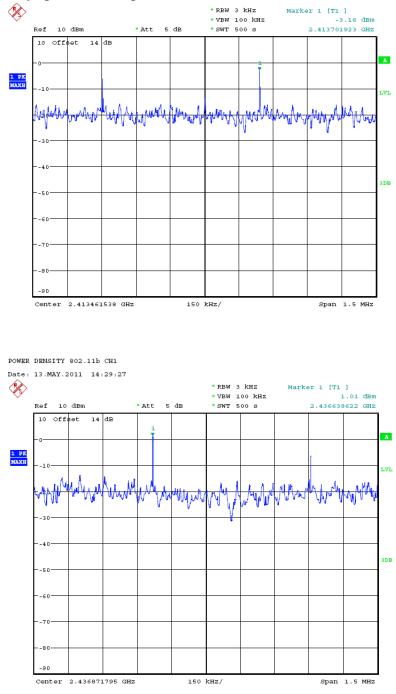

POWER DENSITY 802.11b CH6 Date: 13.MAY.2011 14:30:33



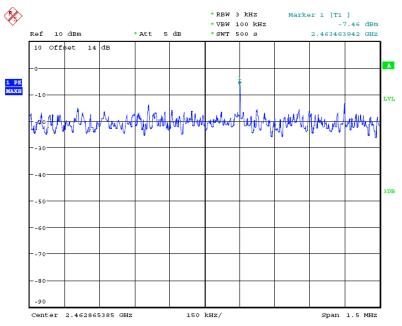


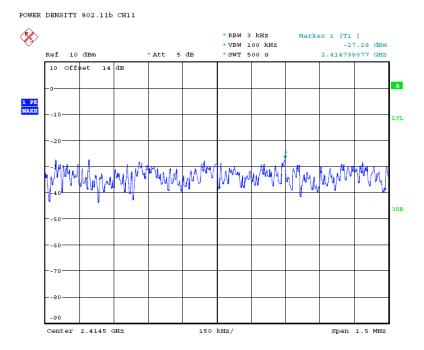

POWER DENSITY 802.11g CH1 Date: 13.MAY.2011 14:36:58




Registration number: W6M21104-11399-C-1 FCC ID: RXZ-WR861R

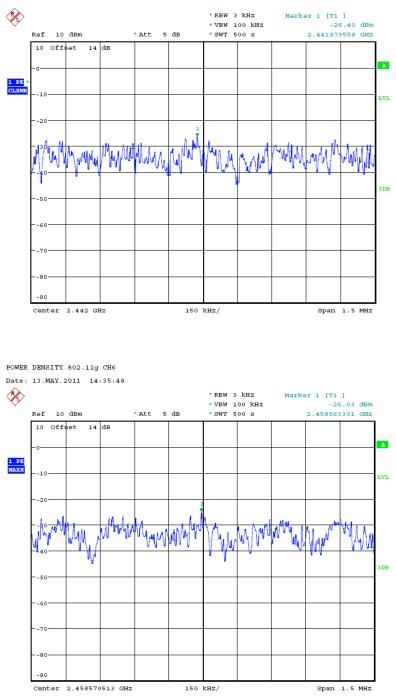

POWER DENSITY 802.11g CH11 Date: 13.MAY.2011 14:34:40




Registration number: W6M21104-11399-C-1 FCC ID: RXZ-WR861R

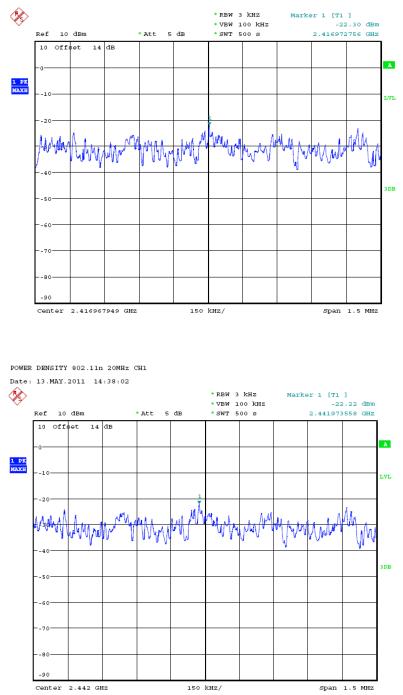


POWER DENSITY 802.11n 20MHz CH6 Date: 13.MAY.2011 14:38:48




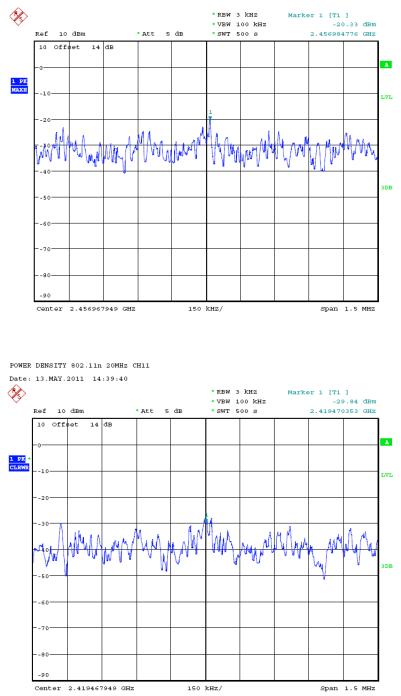

POWER DENSITY 802.11n 40MHz CH1 Date: 13.MAY.2011 14:42:42



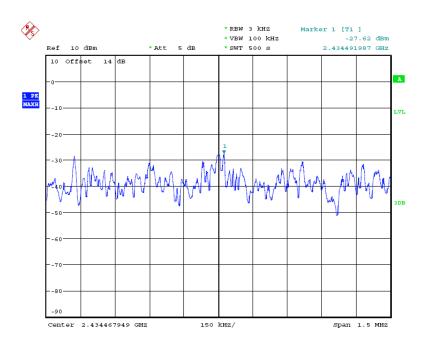

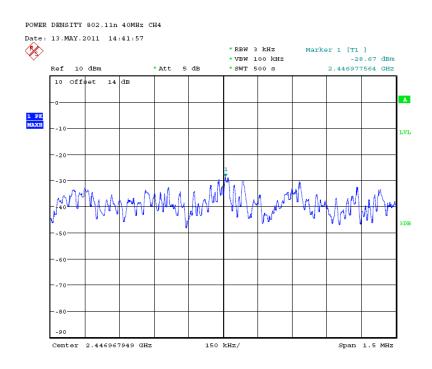

POWER DENSITY 802.11n 40MHz CH7 Date: 13.MAY.2011 14:41:14



Limits:

Frequency Range MHz	dBm
902-928	8
2400-2483.5	8
5725-5850	8

Test equipment used: ETSTW-RE 055



3.9 Radiated Emission from Digital Part

FCC Rule: 15.109

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission	Field Strength	Field Strength		
(MHz)	(microvolts/meter)	(dBmicrovolts/meter)		
30 - 88	100	40.0		
88 - 216	150	43.5		
216 - 960	200	46.0		
Above 960	500	54.0		

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 018, ETSTW-RE 028, ETSTW-RE 029, ETSTW-RE 030, ETSTW-RE 044


Explanation: The test results are listed in the separated test report no. W6M21104-11399-P-15B.




3.9 Power Line Conducted Emission

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

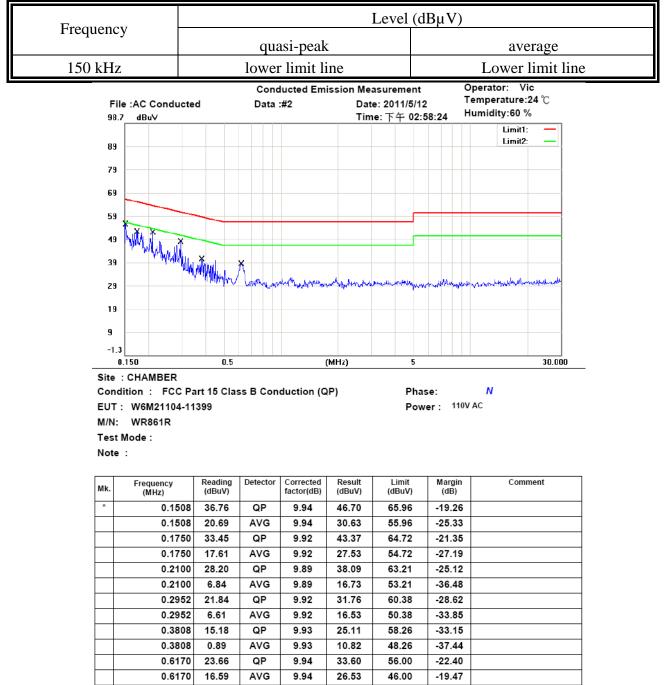



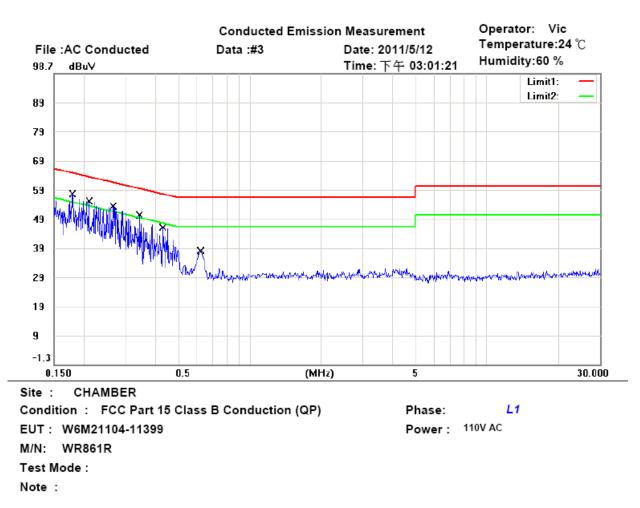

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Comment
	0.1793	34.70	QP	9.96	44.66	64.52	-19.86	
	0.1793	15.13	AVG	9.96	25.09	54.52	-29.43	
	0.2106	28.99	QP	9.94	38.93	63.18	-24.25	
	0.2106	7.96	AVG	9.94	17.90	53.18	-35.28	
	0.2657	25.63	QP	9.97	35.60	61.25	-25.65	
	0.2657	7.41	AVG	9.97	17.38	51.25	-33.87	
	0.3430	20.62	QP	9.98	30.60	59.13	-28.53	
	0.3430	2.89	AVG	9.98	12.87	49.13	-36.26	
	0.4295	17.72	QP	10.00	27.72	57.26	-29.54	
	0.4295	5.39	AVG	10.00	15.39	47.26	-31.87	
	0.6237	23.44	QP	10.00	33.44	56.00	-22.56	
*	0.6237	16.41	AVG	10.00	26.41	46.00	-19.59	

Note: 1. The formula of measured value as: Test Result = Reading + Correction Factor

- 2. The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss
- 3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
- 4. All not in the table noted test results are more than 20 dB below the relevant limits.
- 5. Up Line: QP Limit Line, Down Line: Ave Limit Line.



Registration number: W6M21104-11399-C-1 FCC ID: RXZ-WR861R

Limits:

Frequency of Emission (MHz)	Conducted Limit (dBuV)		
	Quasi Peak	Average	
0.15-0.5	66 to 56	56 to 46	
0.5-5	56	46	
5-30	60	50	

Test equipment used: ETSTW-CE 001, ETSTW-CE 004, ETSTW-CE 006




Appendix

Measurement diagrams

Spurious Emissions radiated




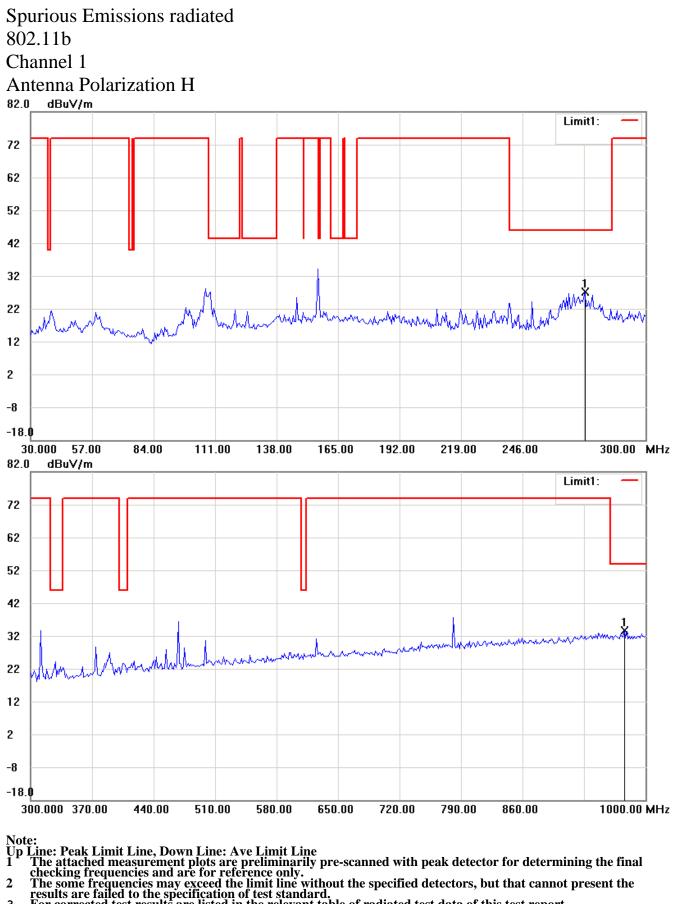

The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report.


3



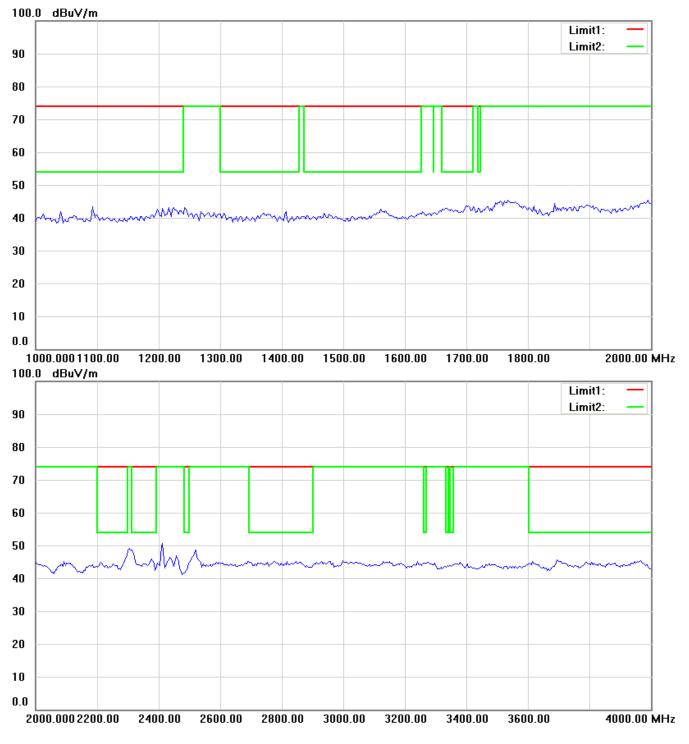


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.



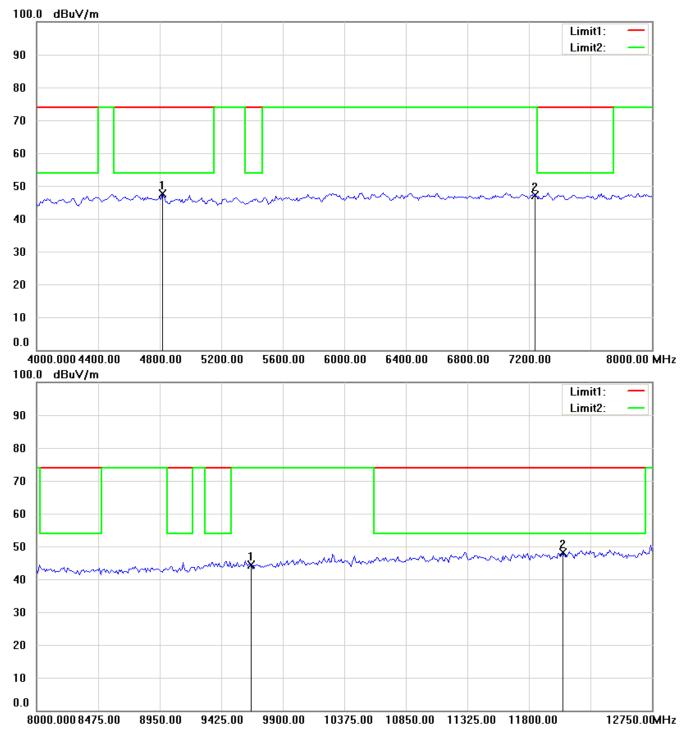

- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.




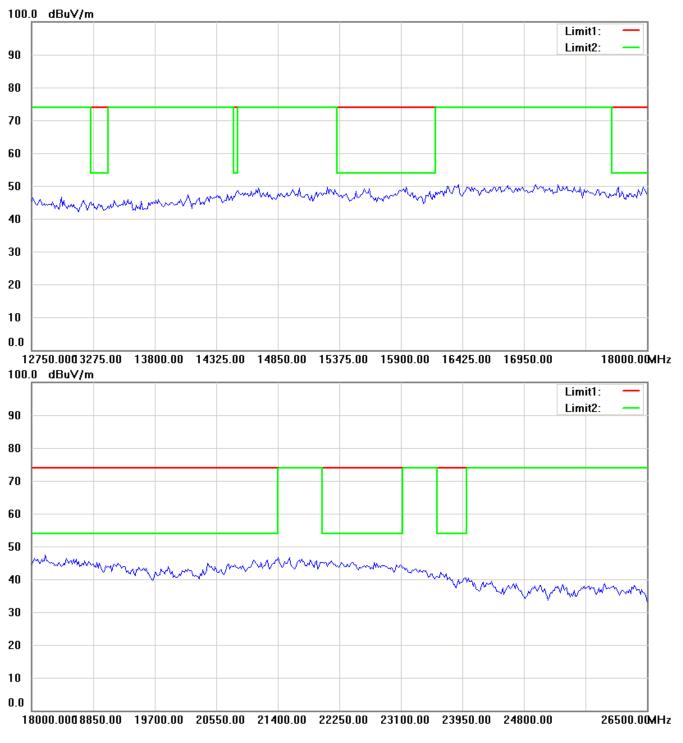

- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.



Antenna Polarization V

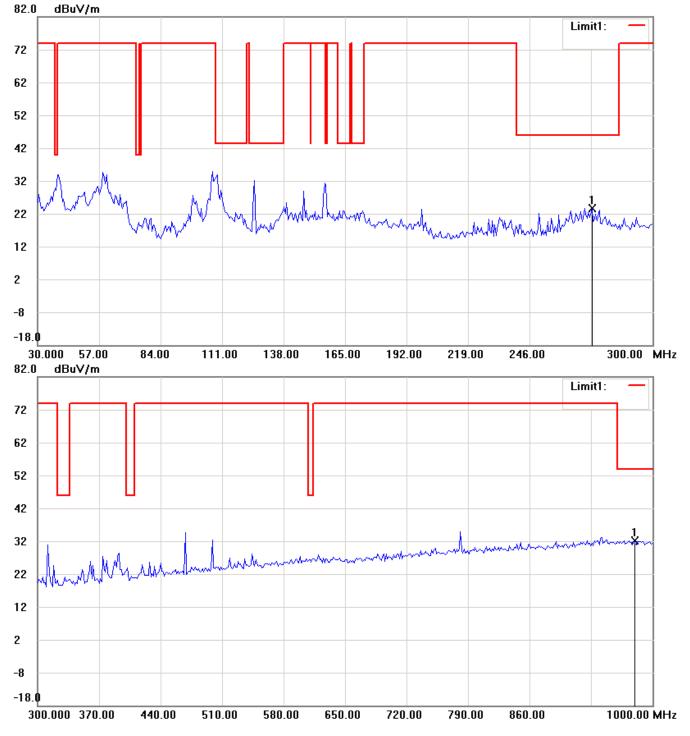


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report.
- 3






- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only. 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report.
- 3



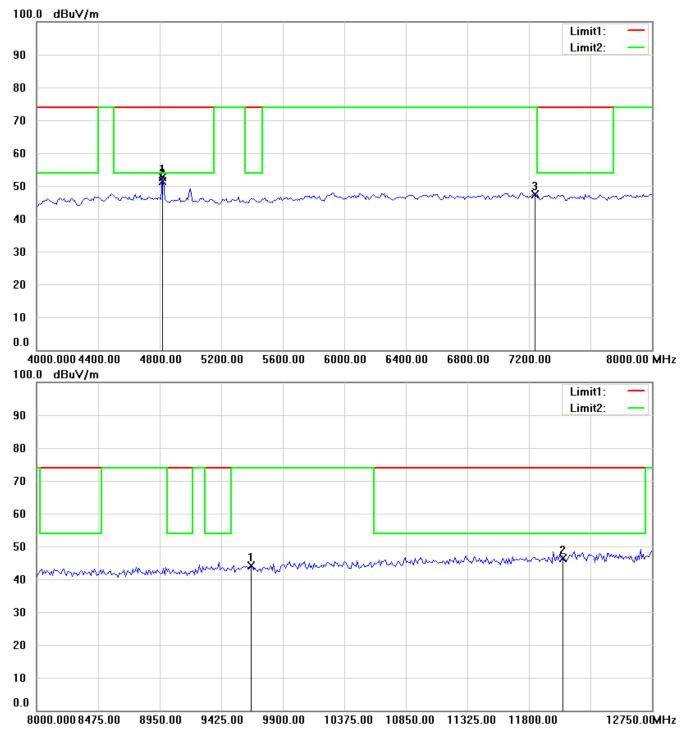


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.



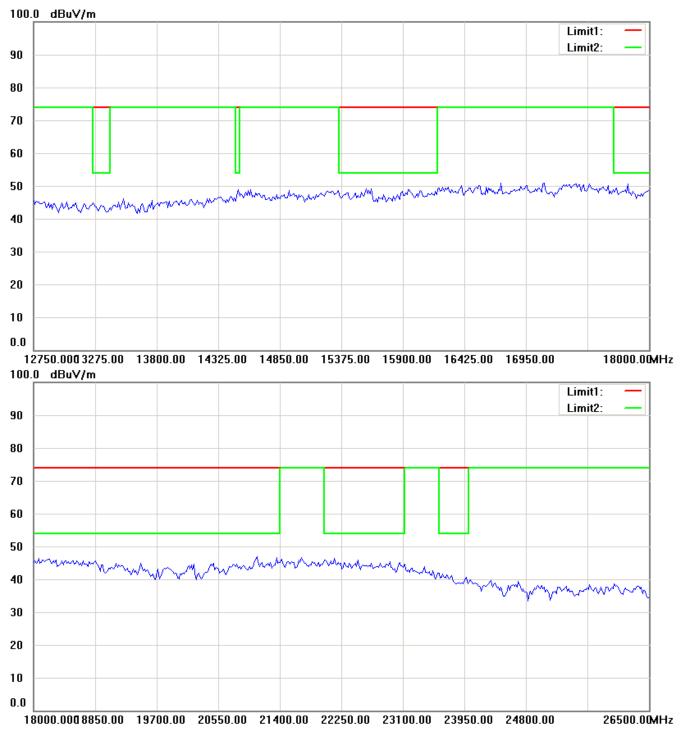

- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.



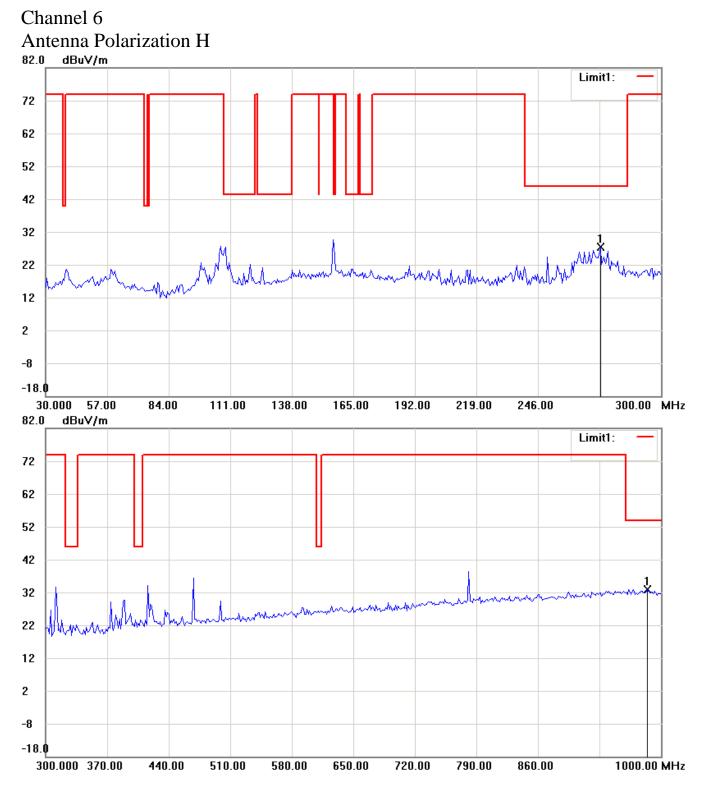


Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.

The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report. 2


3



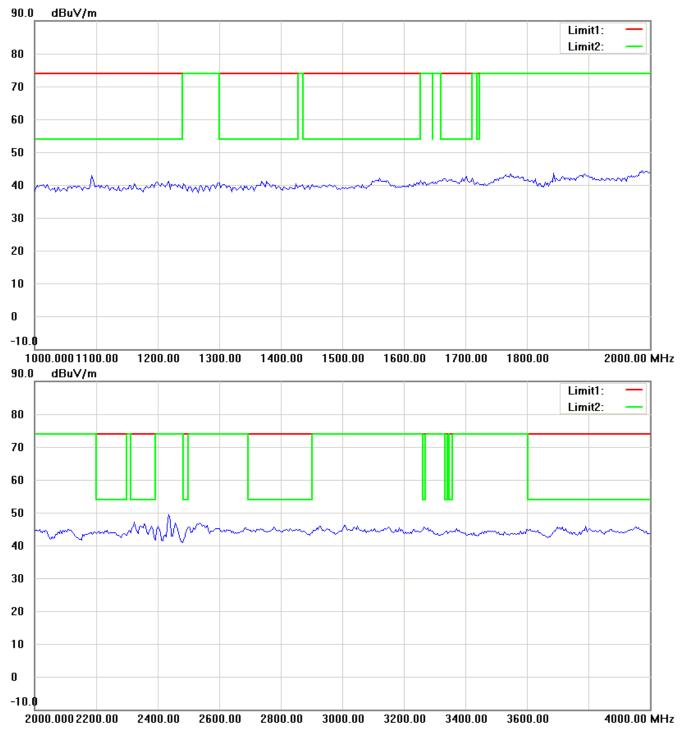


- Note:
 Up Line: Peak Limit Line, Down Line: Ave Limit Line
 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



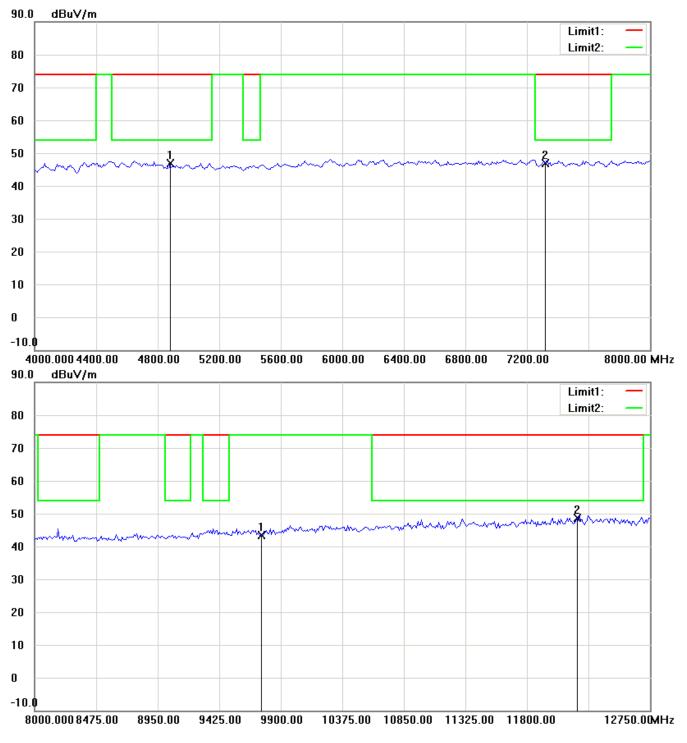

- Note:
 Up Line: Peak Limit Line, Down Line: Ave Limit Line
 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 3 For corrected test results are listed in the relevant table of radiated test data of this test report.




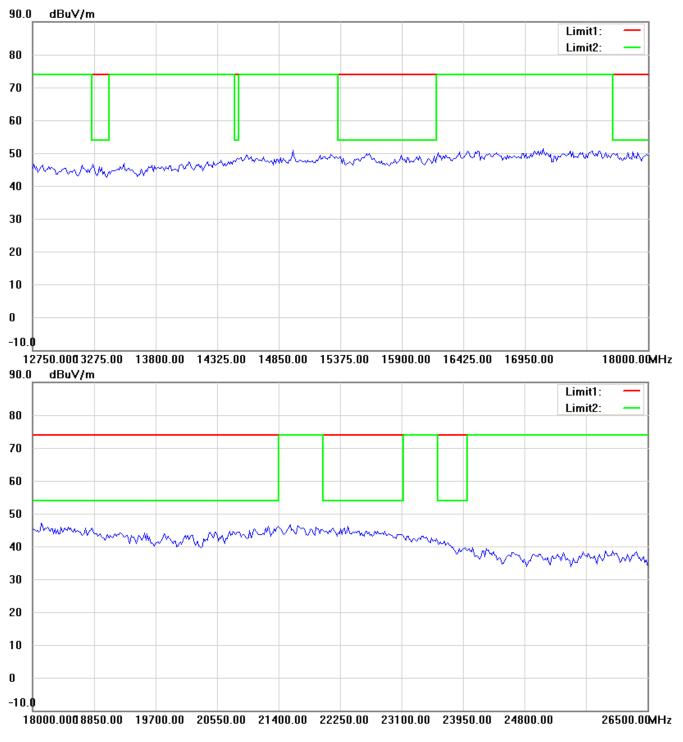

- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.




Antenna Polarization V

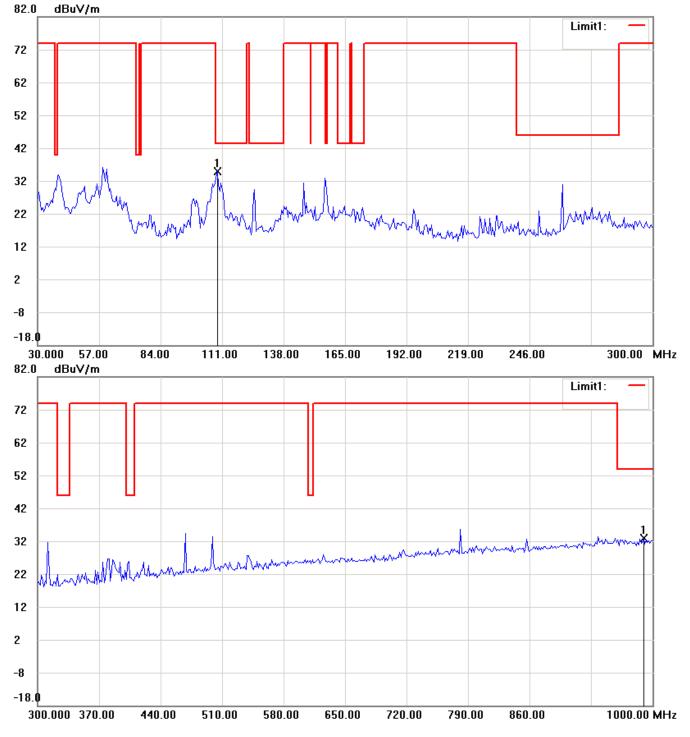


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report.
- 3



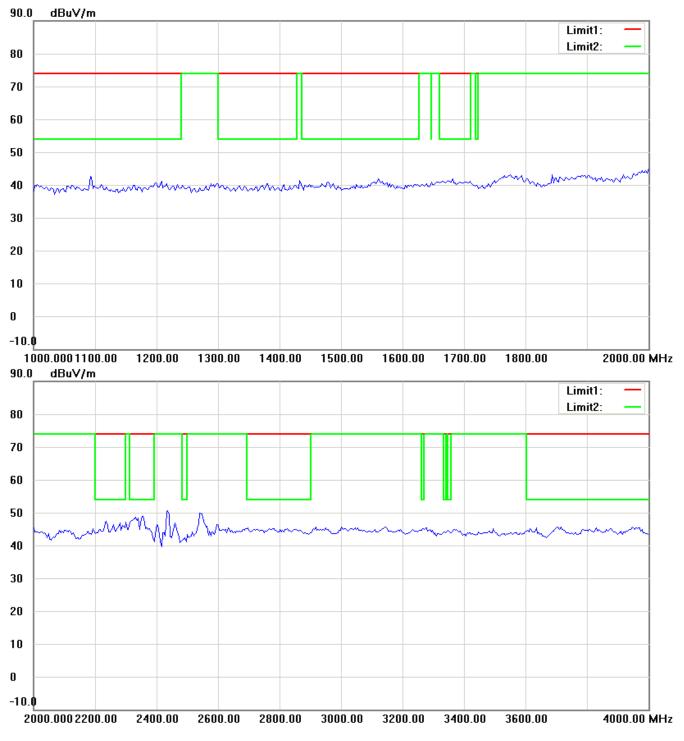


- Note:
 Up Line: Peak Limit Line, Down Line: Ave Limit Line
 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



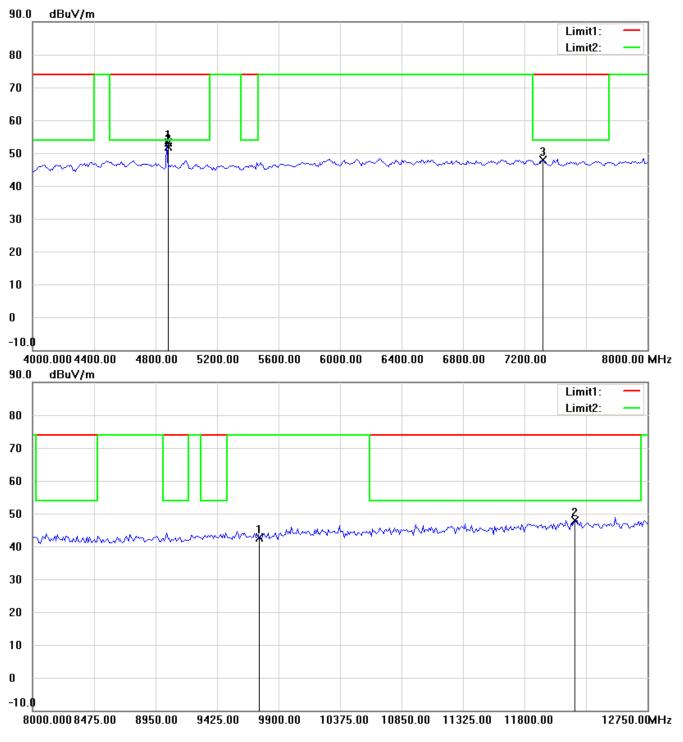


- Note:
 Up Line: Peak Limit Line, Down Line: Ave Limit Line
 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



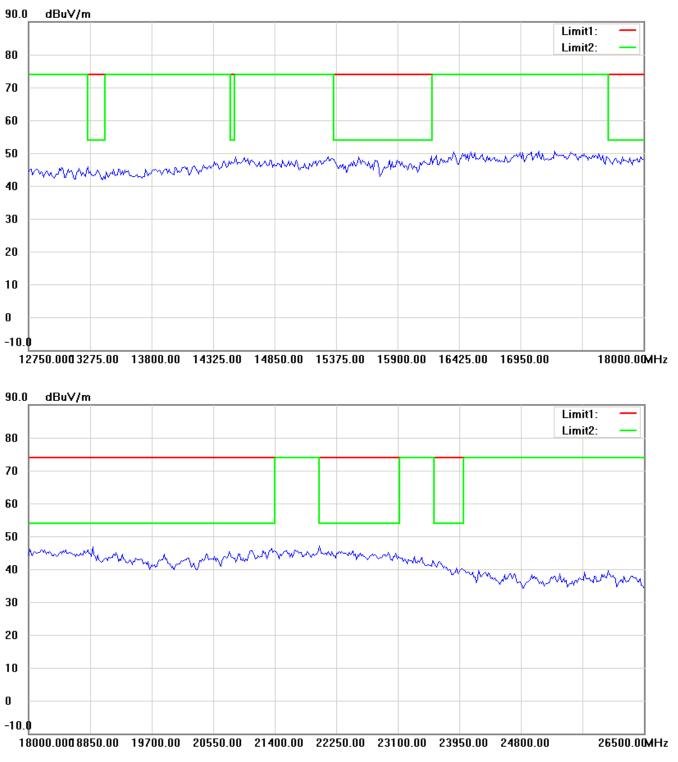

- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report. 2
- 3



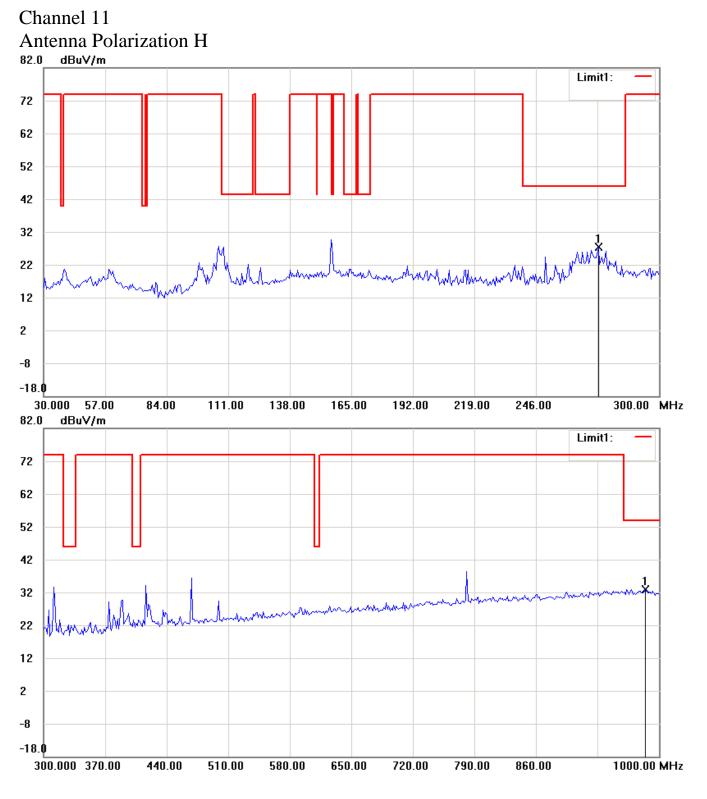


Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.

The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report. 2


3



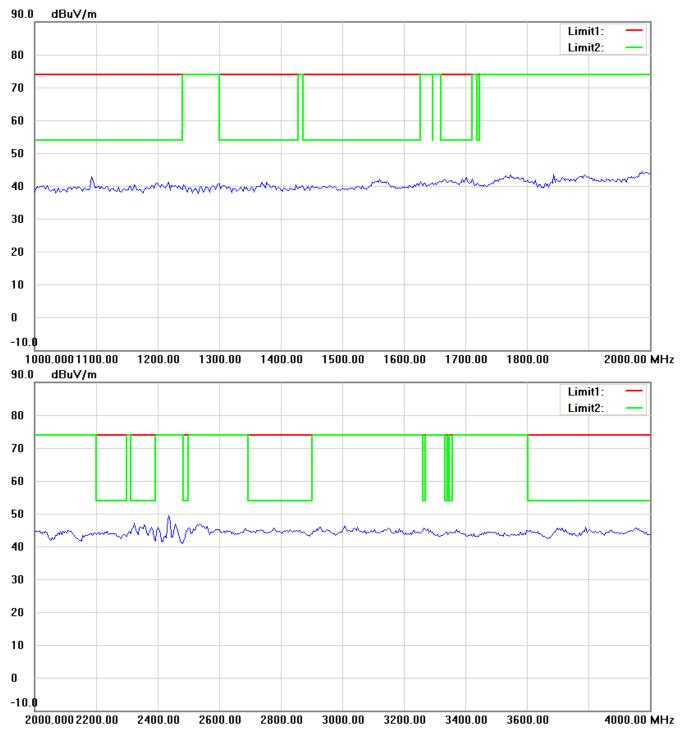


- Note:
 Up Line: Peak Limit Line, Down Line: Ave Limit Line
 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



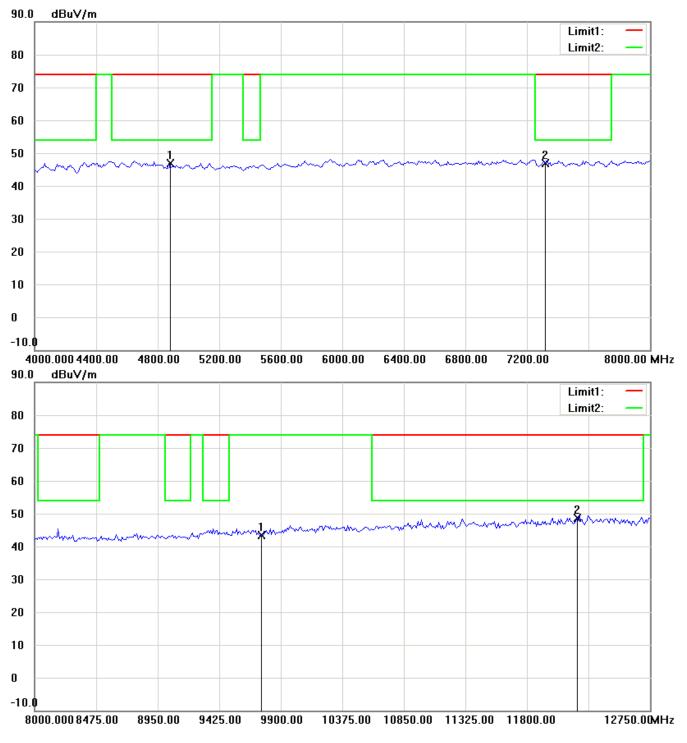

- Note:
 Up Line: Peak Limit Line, Down Line: Ave Limit Line
 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 3 For corrected test results are listed in the relevant table of radiated test data of this test report.




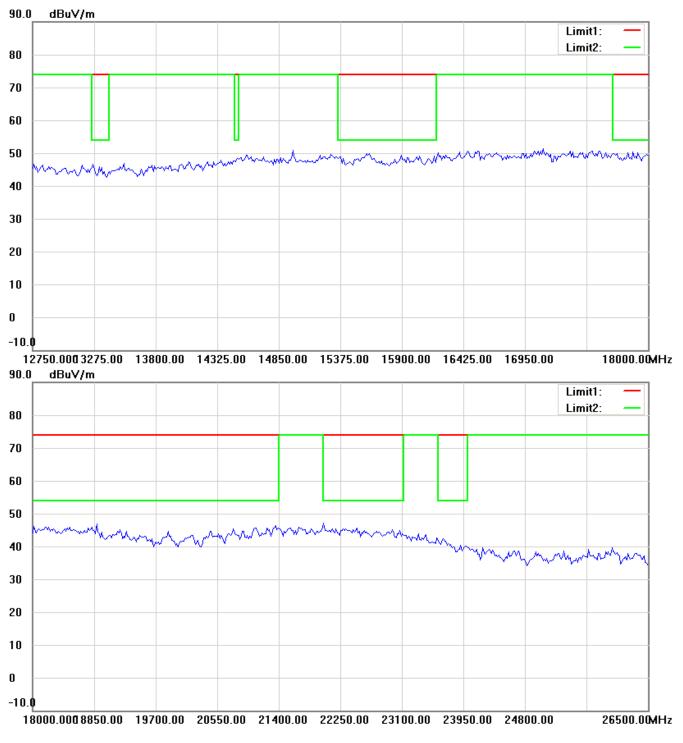

- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.




Antenna Polarization V

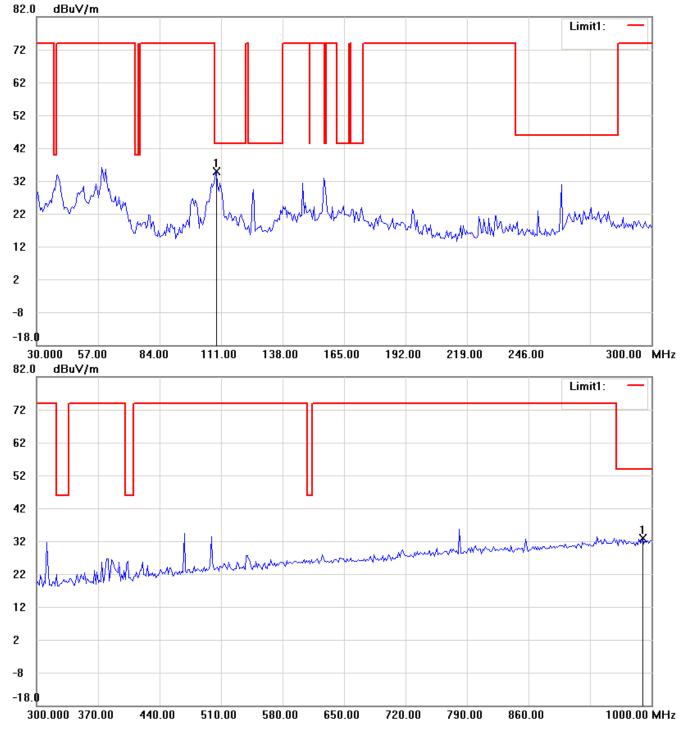


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report.
- 3



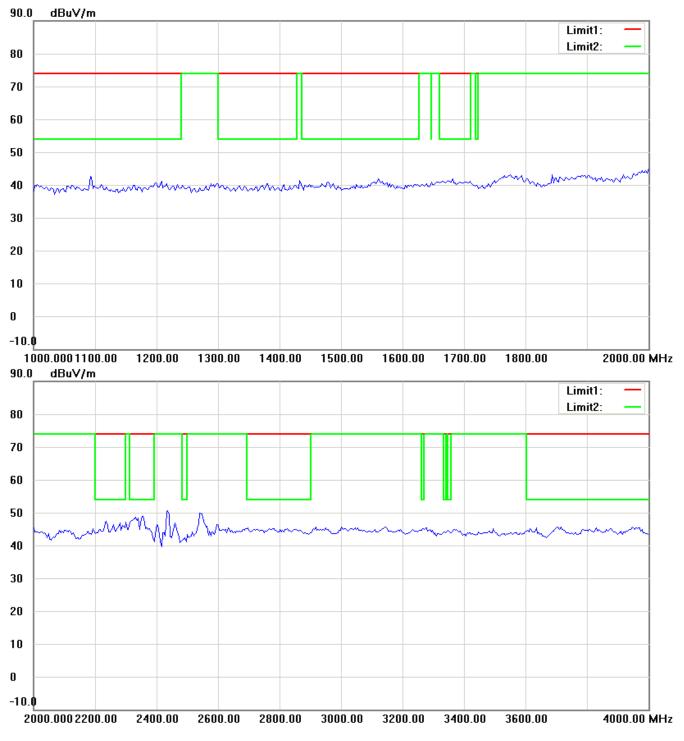


- Note:
 Up Line: Peak Limit Line, Down Line: Ave Limit Line
 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



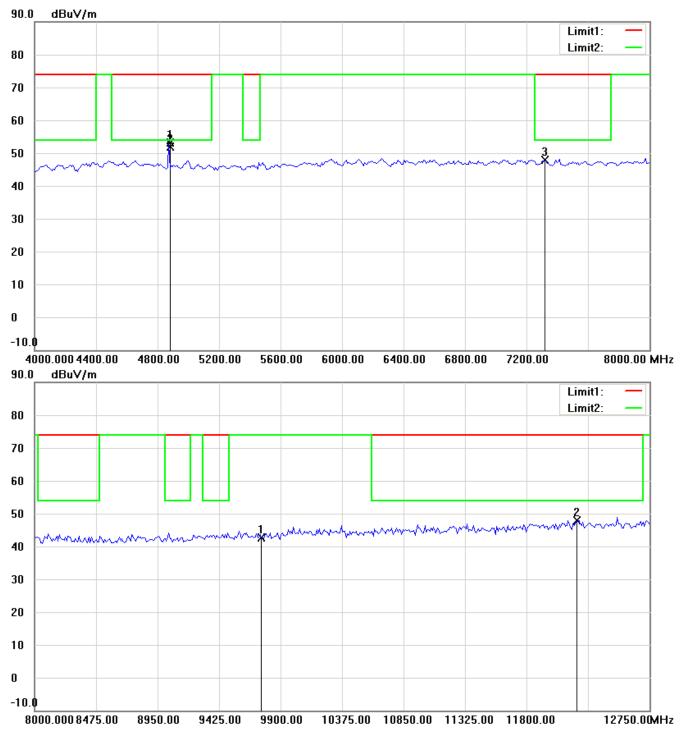

- Note:
 Up Line: Peak Limit Line, Down Line: Ave Limit Line
 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 3 For corrected test results are listed in the relevant table of radiated test data of this test report.




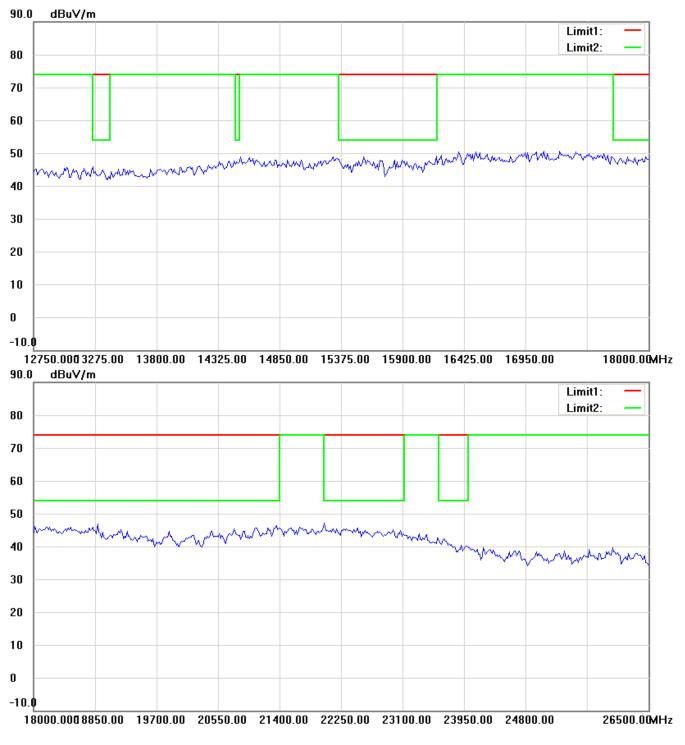


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.




802.11g Channel 1



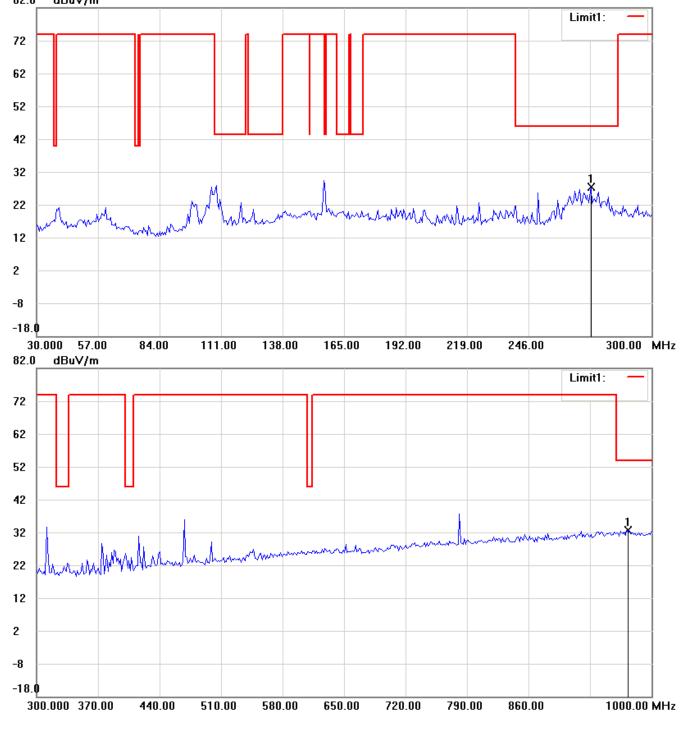


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report. 2
- 3



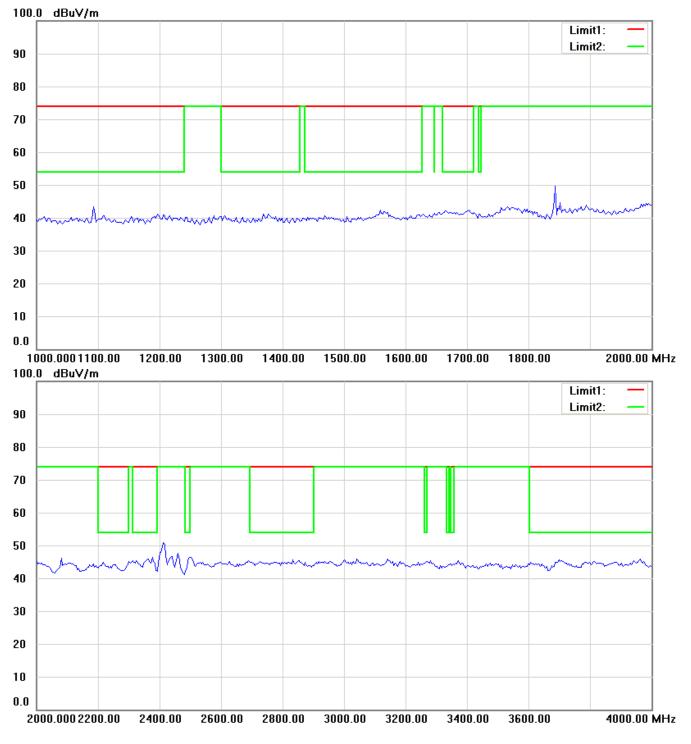


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only. 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report.
- 3



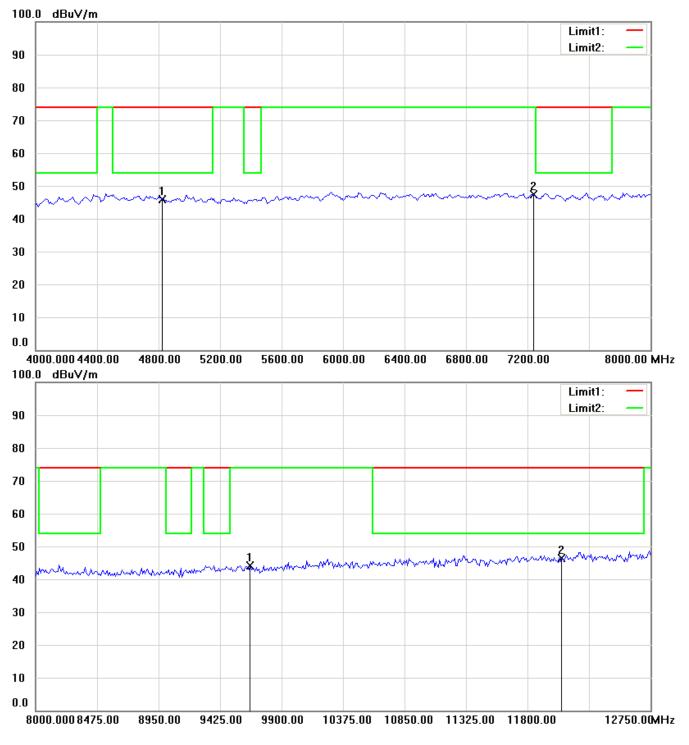

- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.




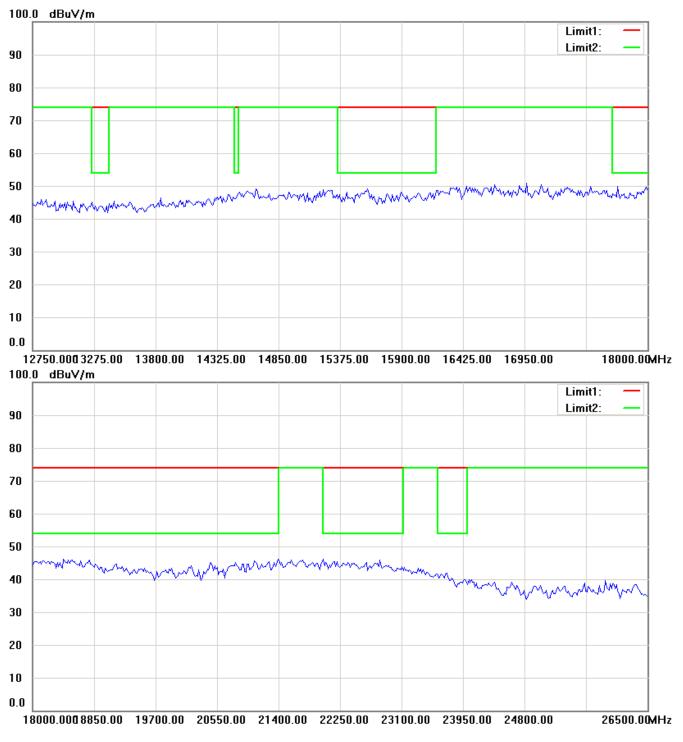

- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.




Antenna Polarization V

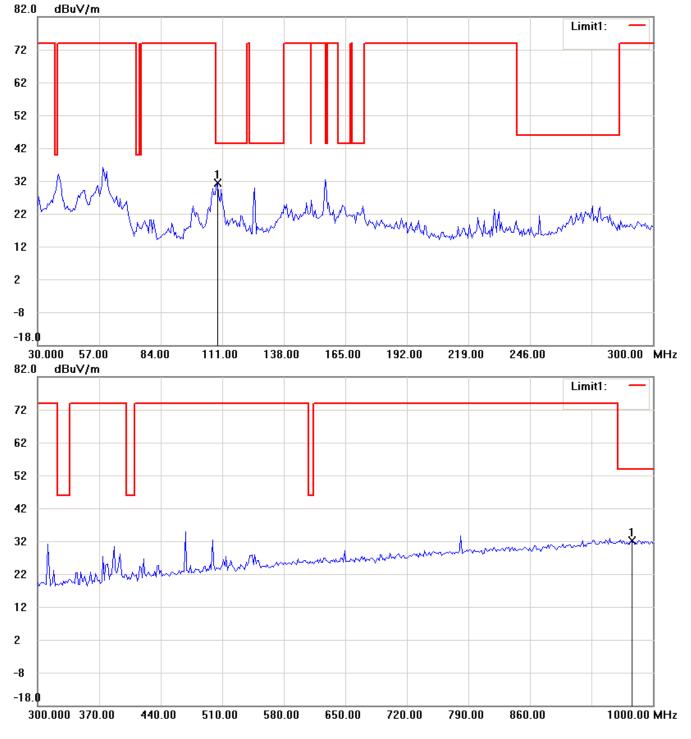


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report. 2
- 3



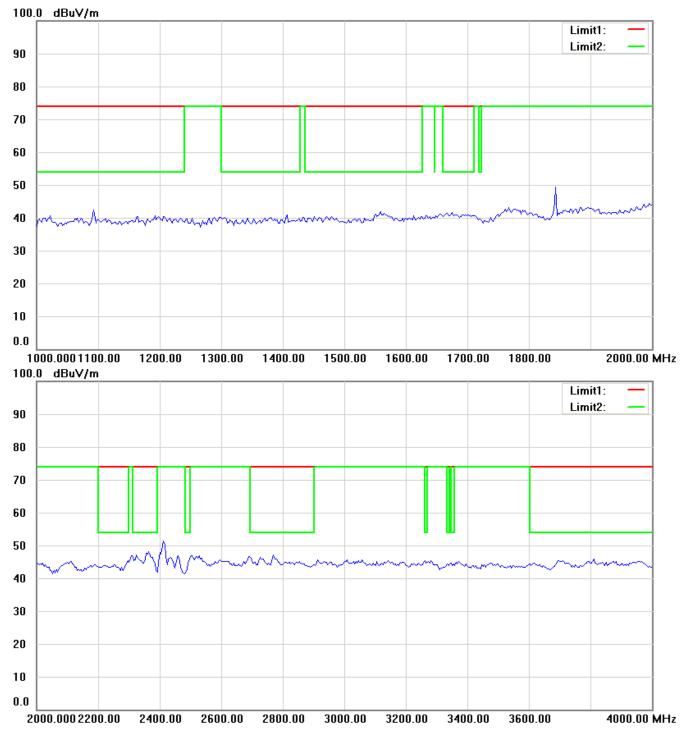


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only. 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report.
- 3



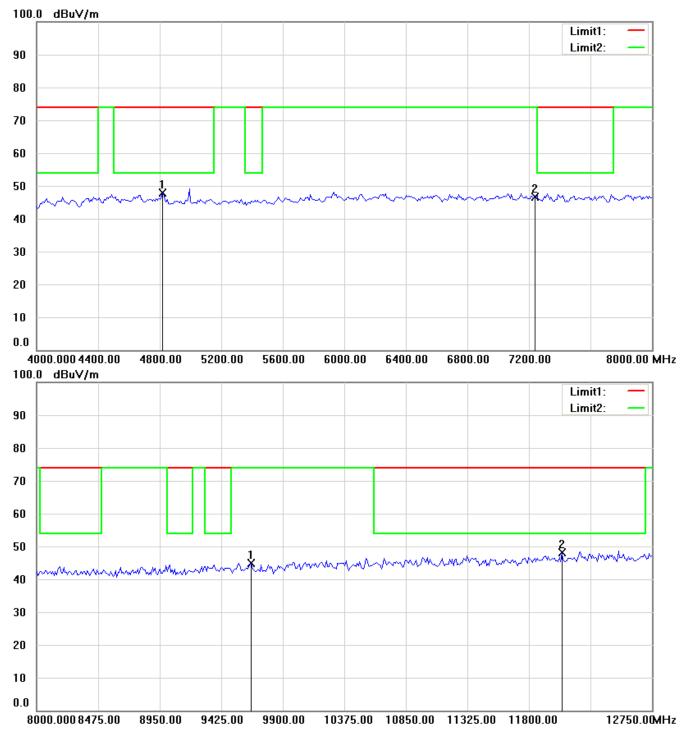


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.



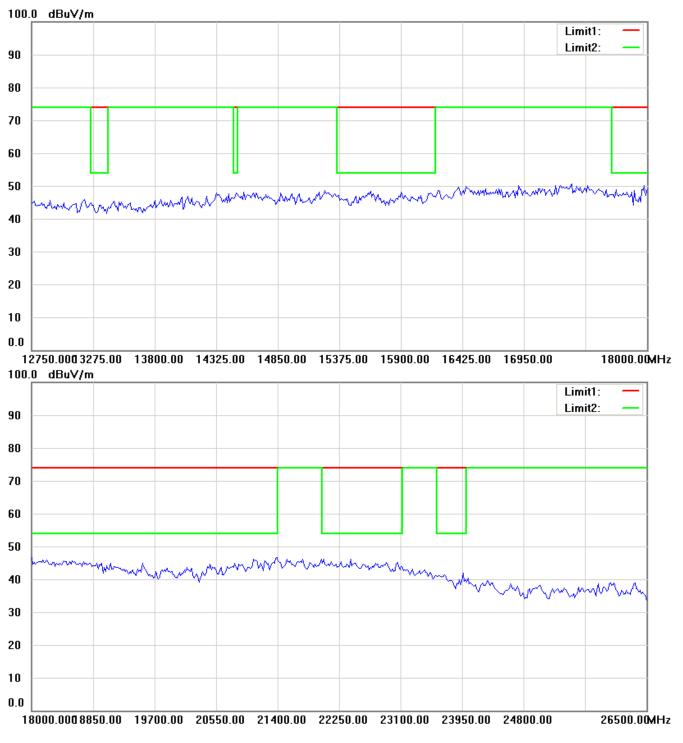

- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.



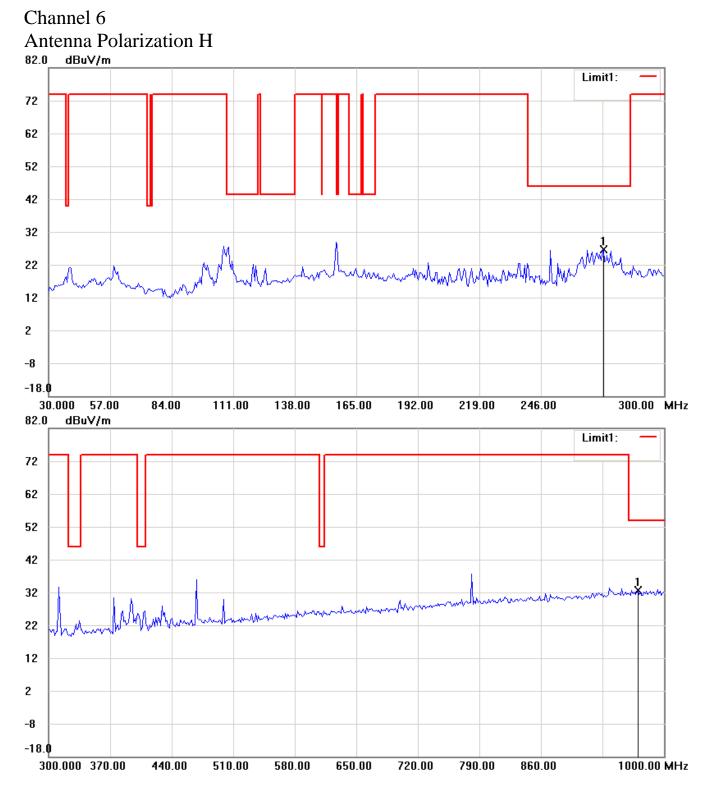


Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.

The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report. 2


3



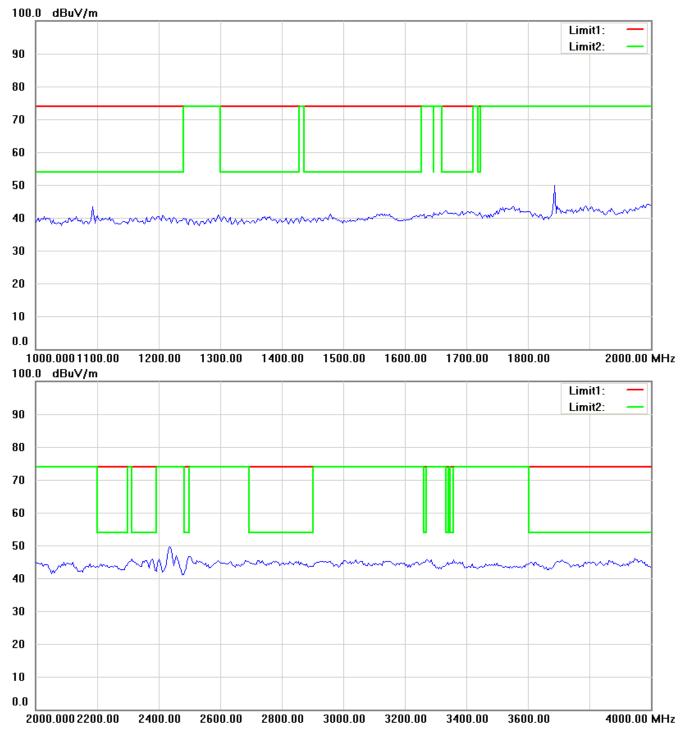


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only. 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report.
- 3



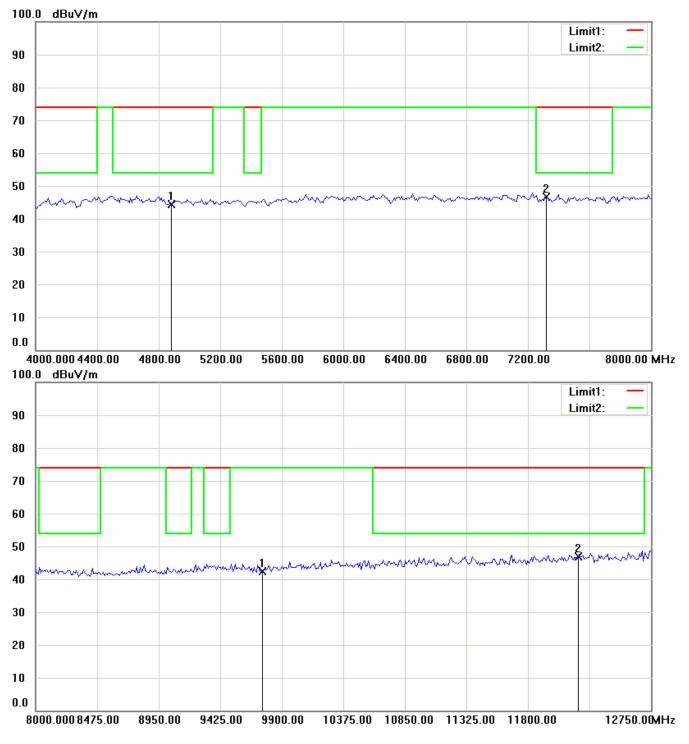

- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.




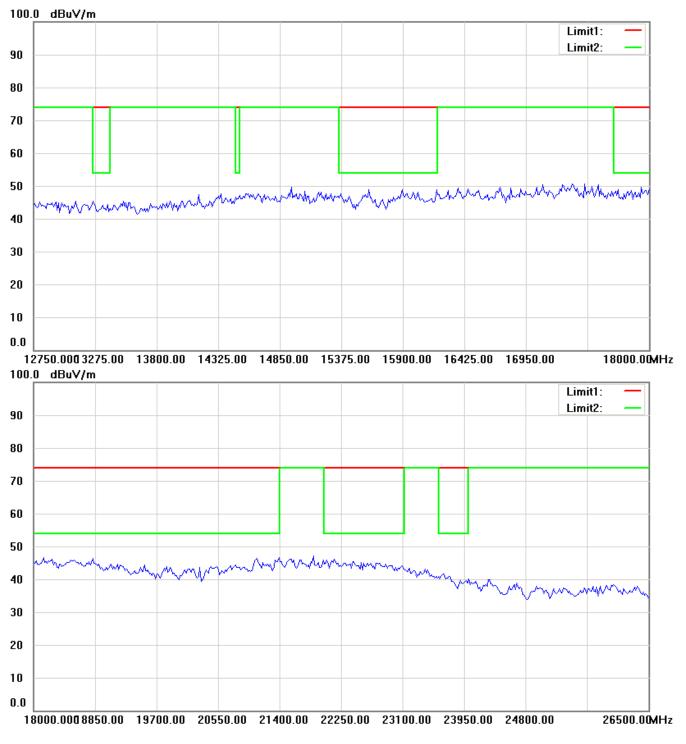

- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.




Antenna Polarization V

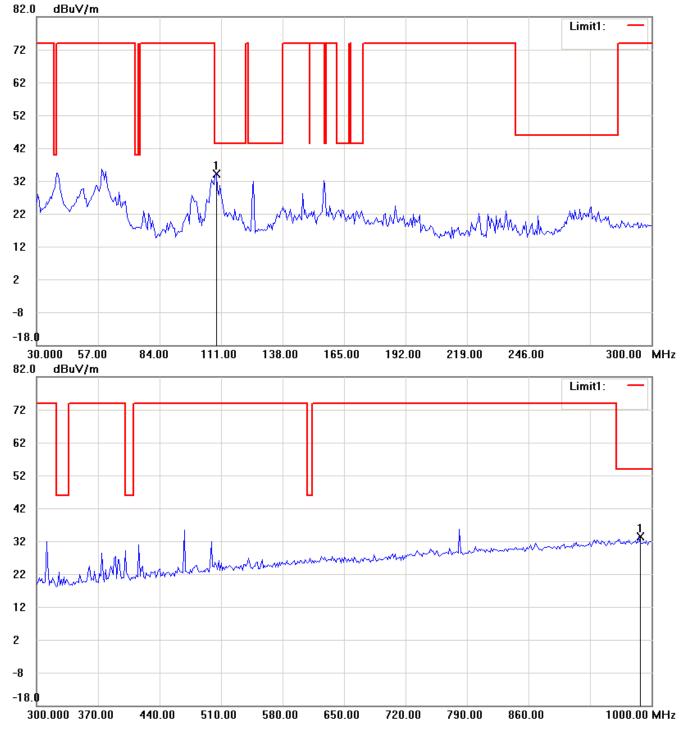


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report.
- 3



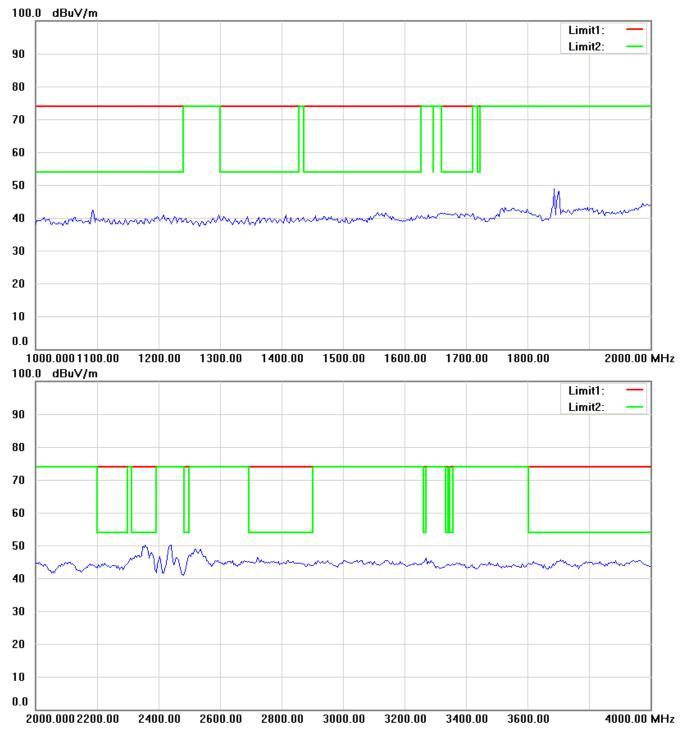


- Note:
 Up Line: Peak Limit Line, Down Line: Ave Limit Line
 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



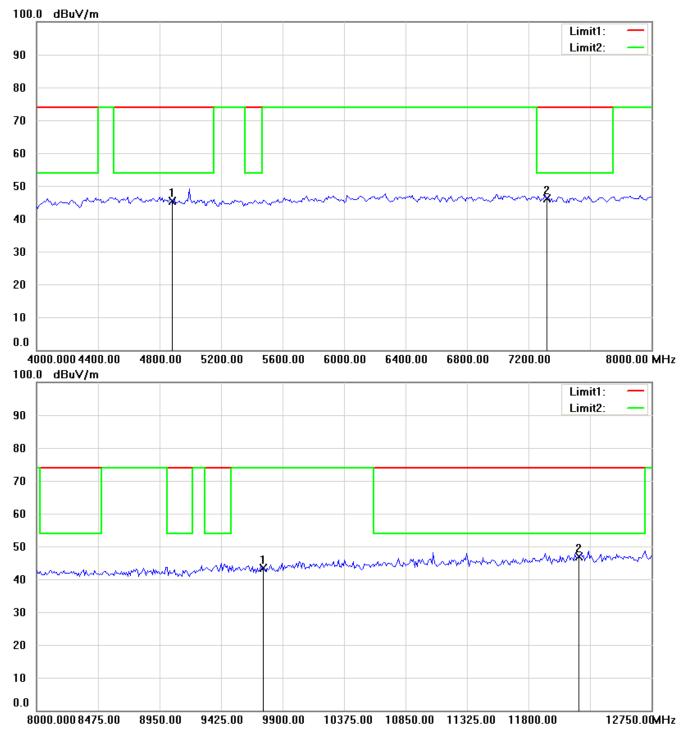


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.



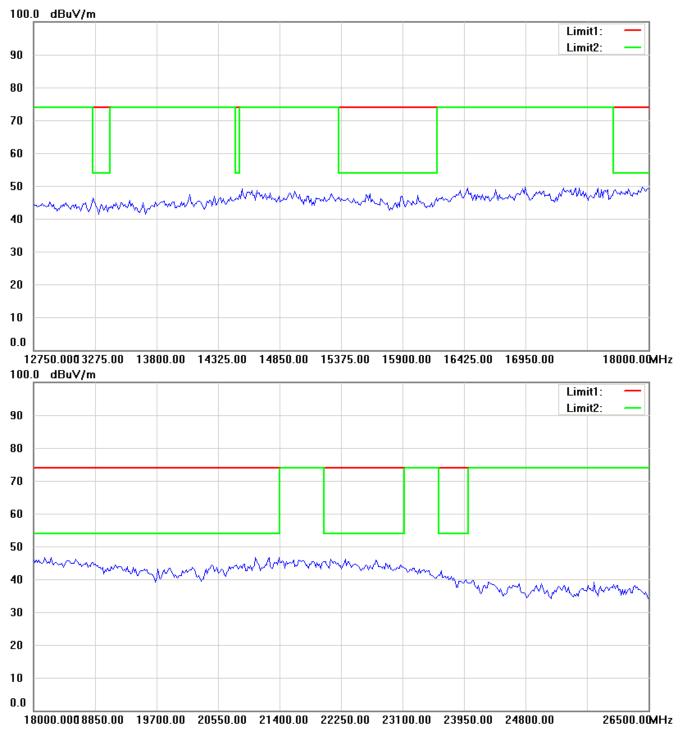

- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.



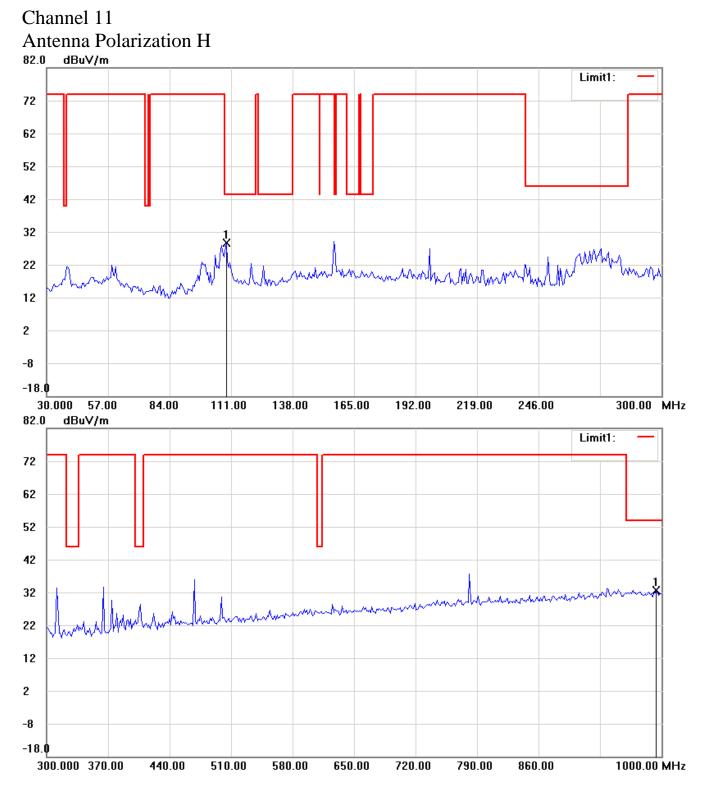


Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.

The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report. 2


3



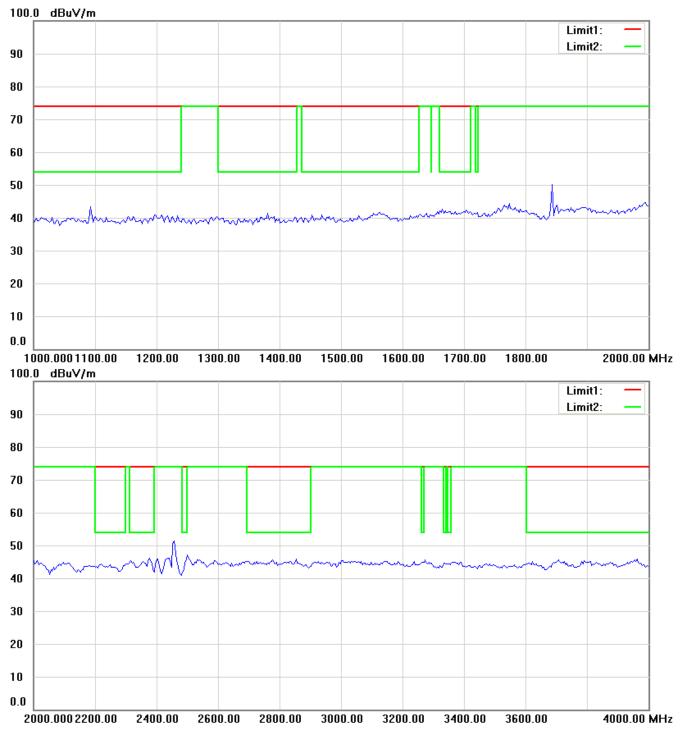


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.



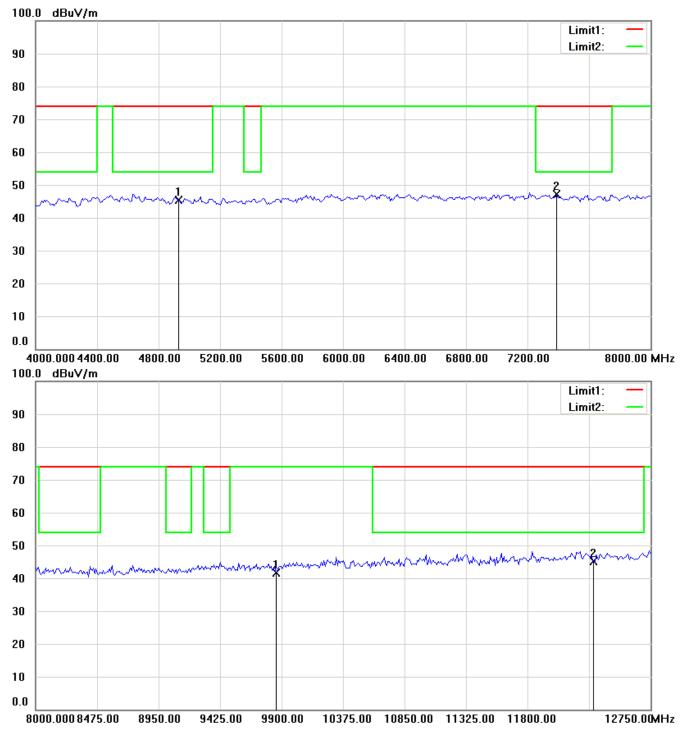

- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.




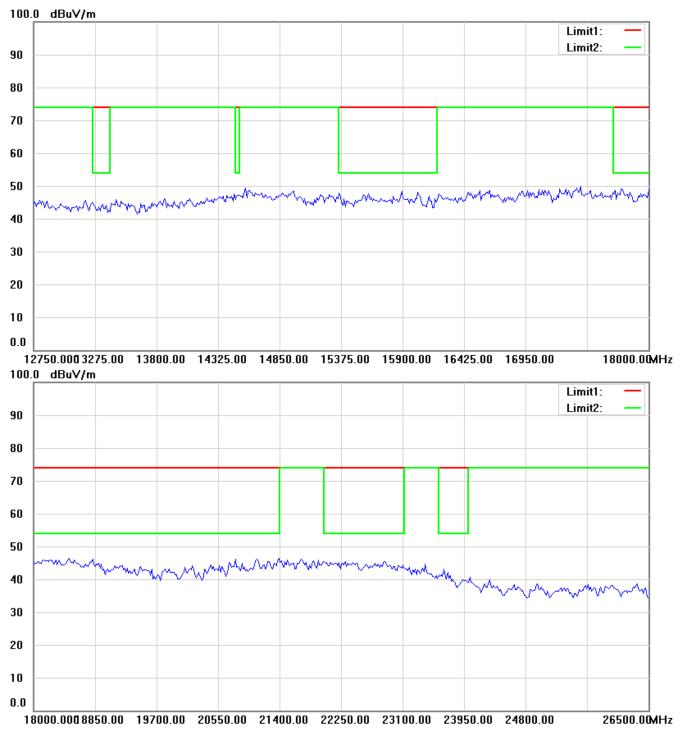

- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.




Antenna Polarization V

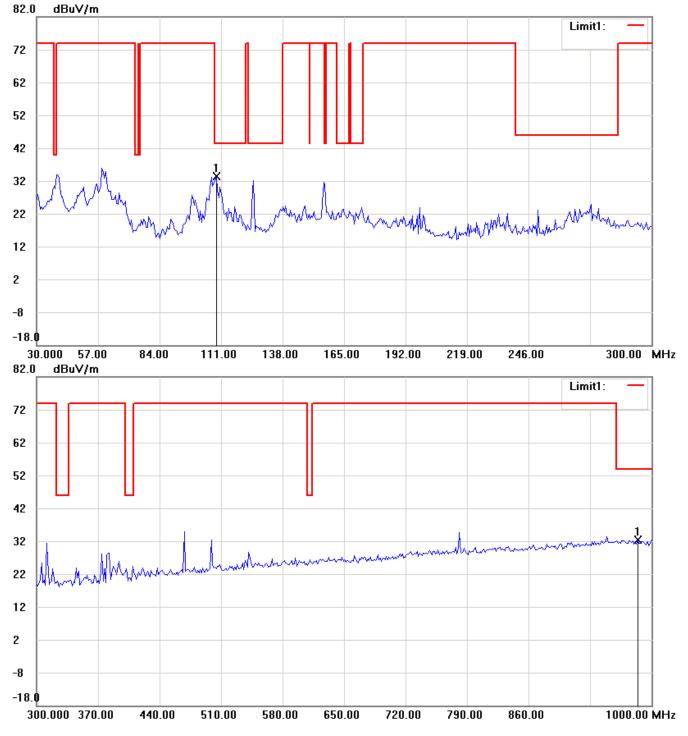


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report.
- 3



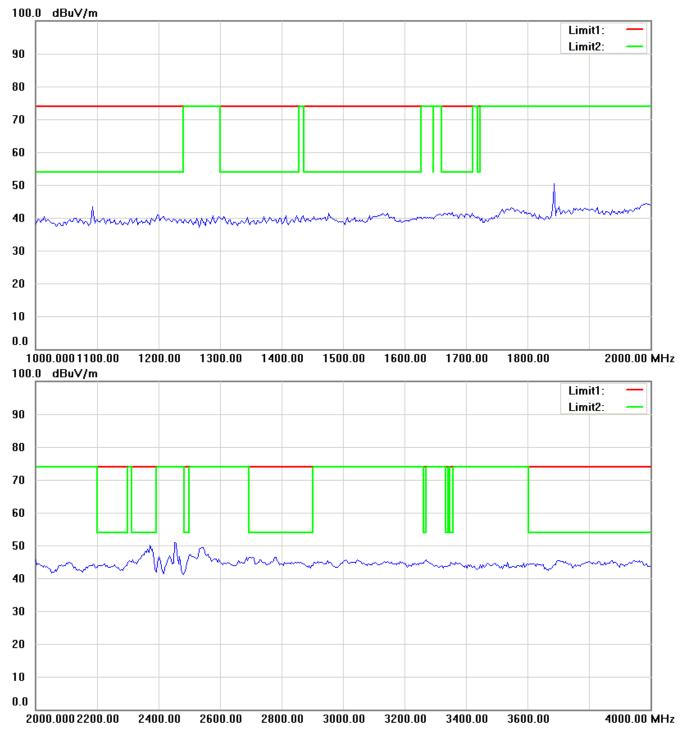


- Note:
 Up Line: Peak Limit Line, Down Line: Ave Limit Line
 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



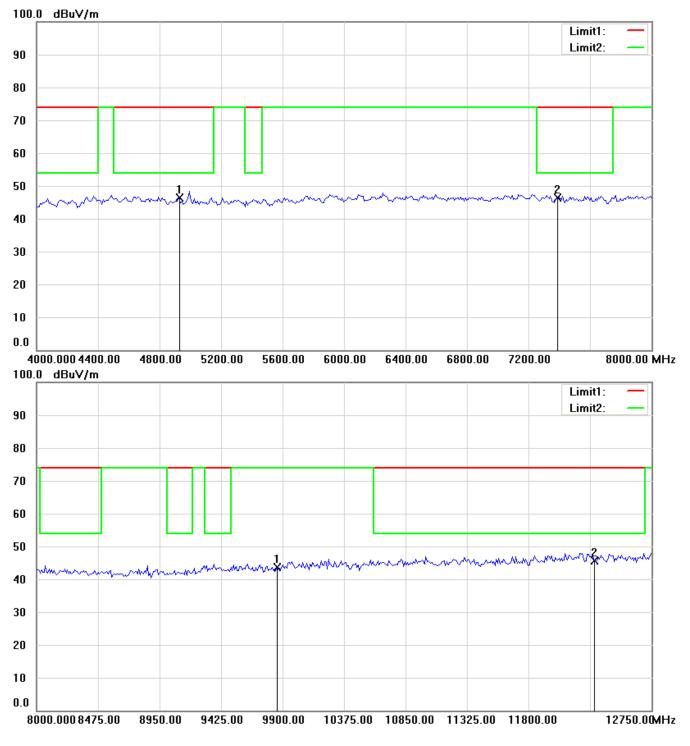


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.



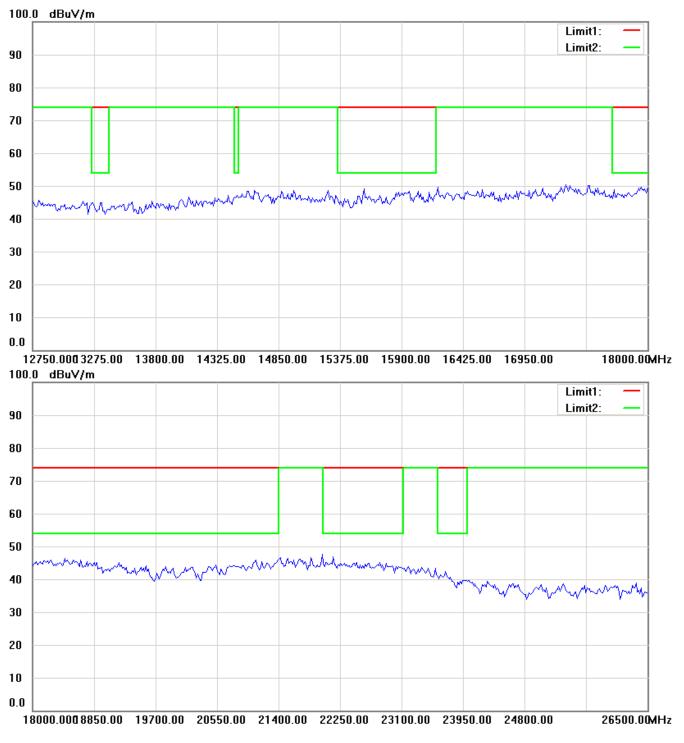

- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.



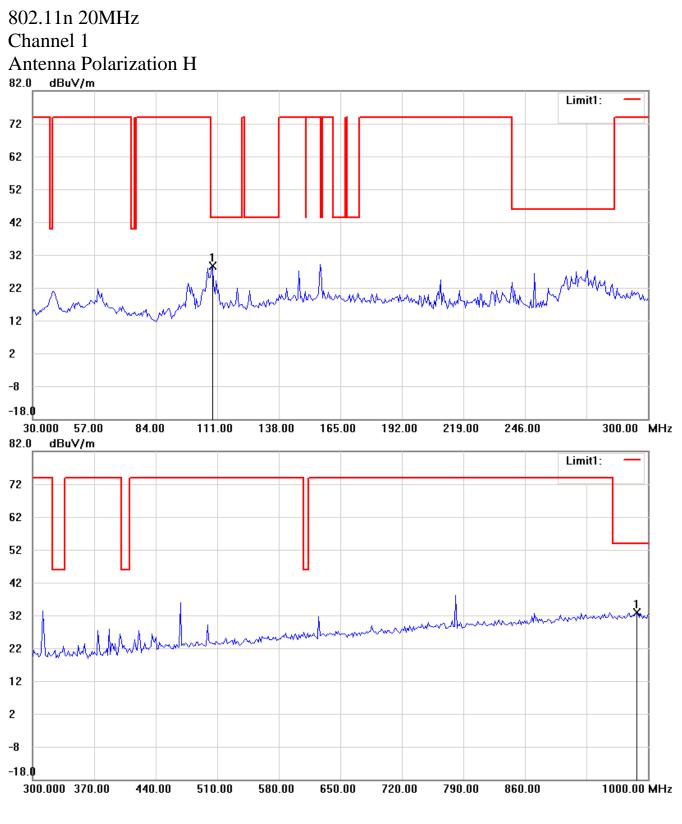


Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only. 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the

The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report.


3



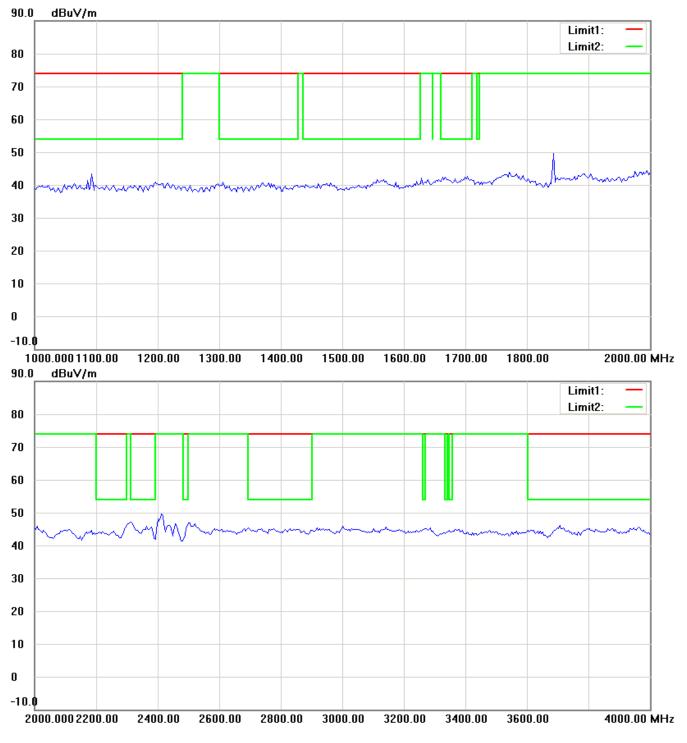


- Note:
 Up Line: Peak Limit Line, Down Line: Ave Limit Line
 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



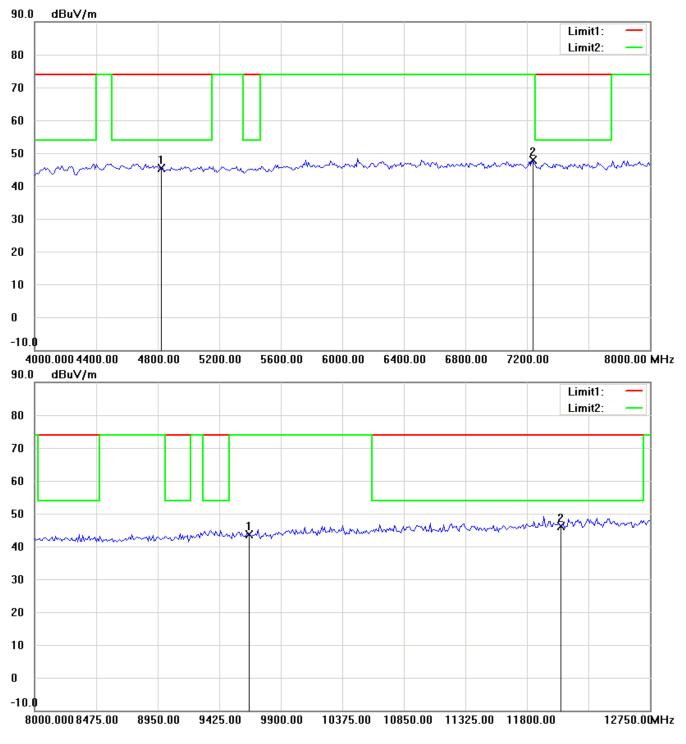

- Note:
 Up Line: Peak Limit Line, Down Line: Ave Limit Line
 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 3 For corrected test results are listed in the relevant table of radiated test data of this test report.




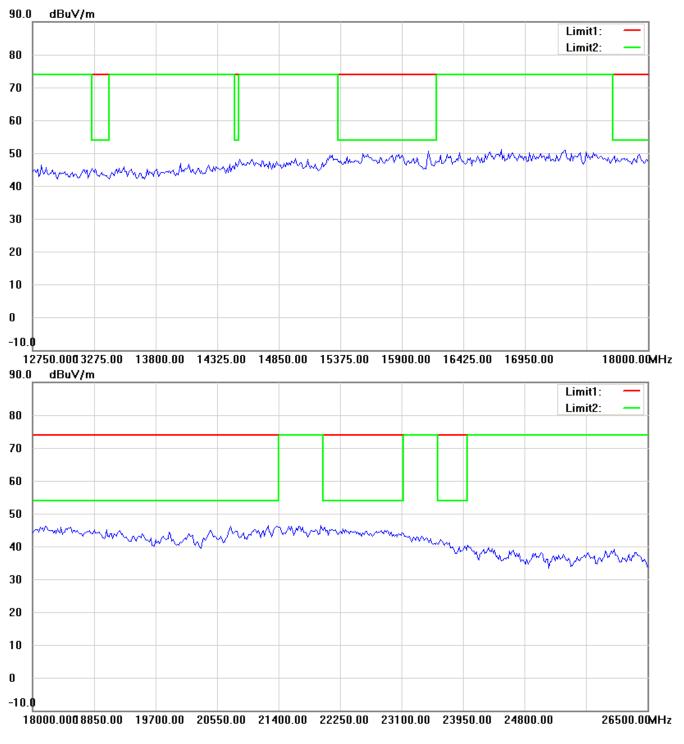

- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.




Antenna Polarization V

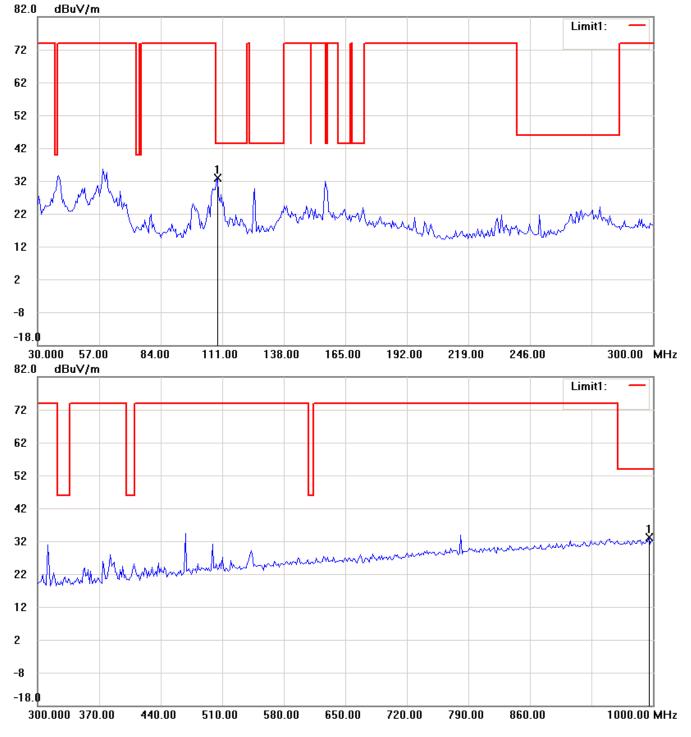


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report. 2
- 3



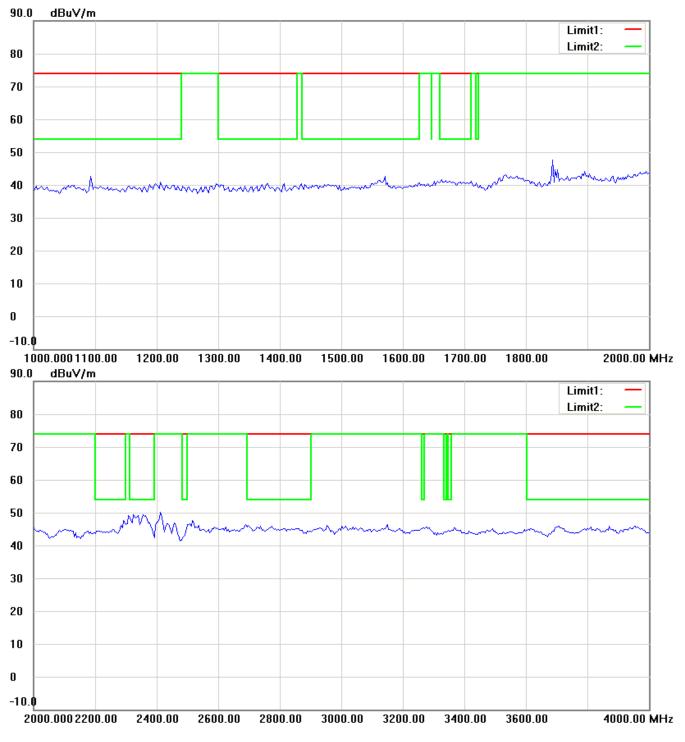


- Note:
 Up Line: Peak Limit Line, Down Line: Ave Limit Line
 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



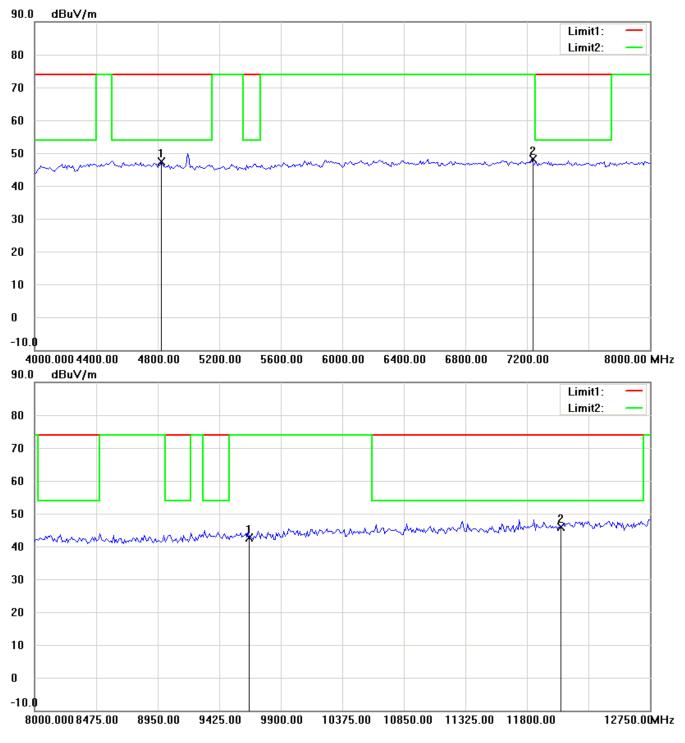


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.



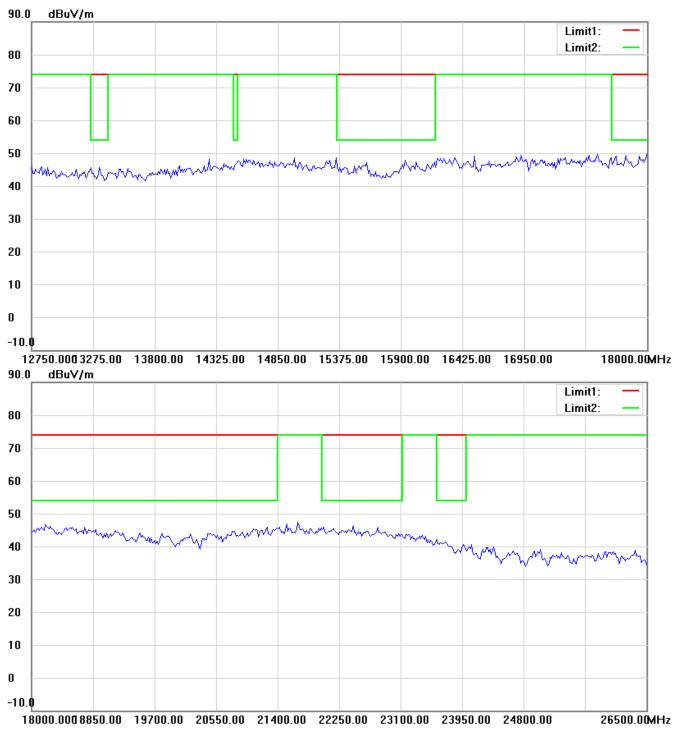

- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.



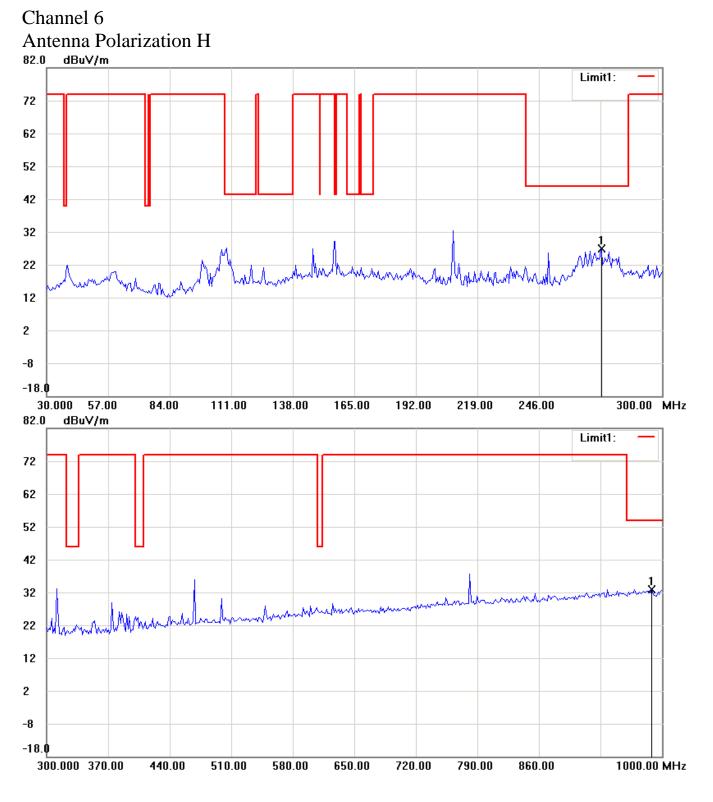


Note: Up Li 1 T

Line: Peak Limit Line, Down Line: Ave Limit Line The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.

The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report. 2


3



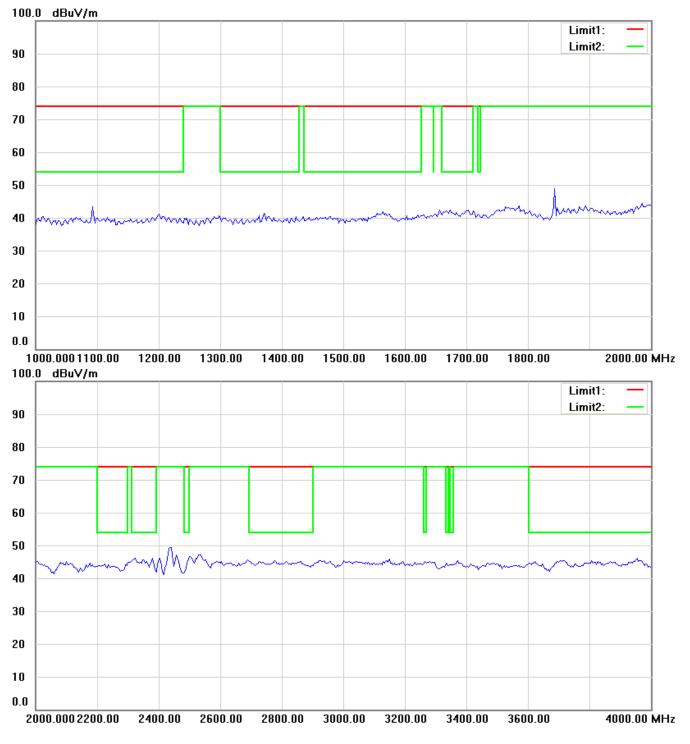


- Note:
 Up Line: Peak Limit Line, Down Line: Ave Limit Line
 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



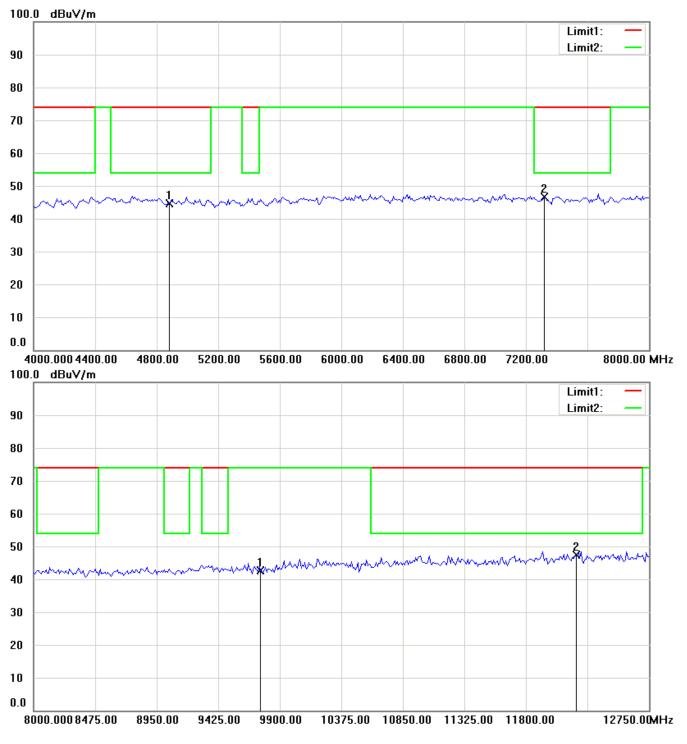

- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.




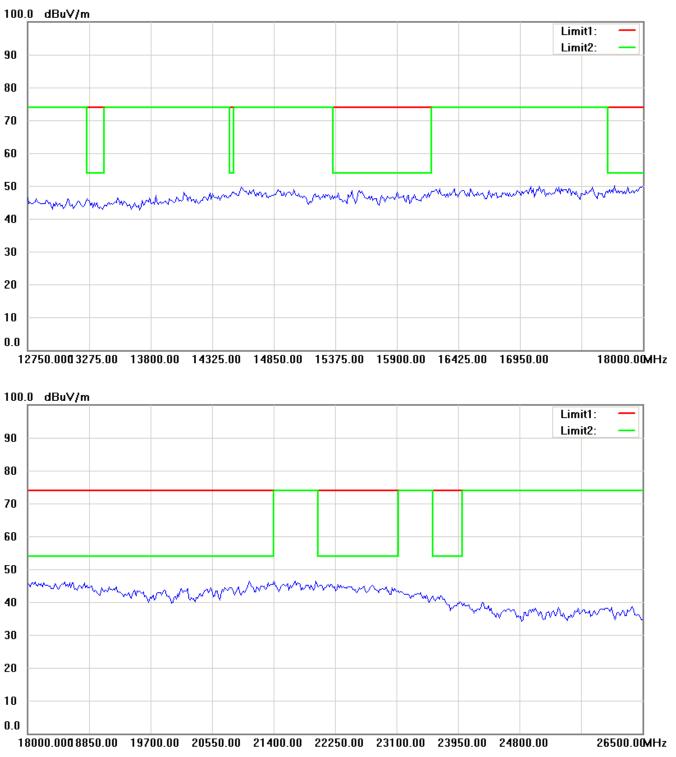

- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report.
- 3




Antenna Polarization V

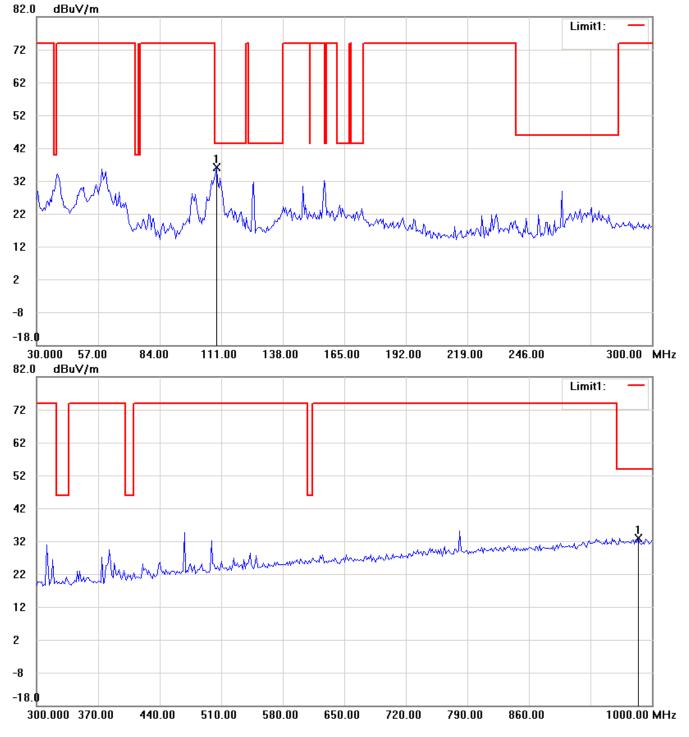


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report. 2
- 3



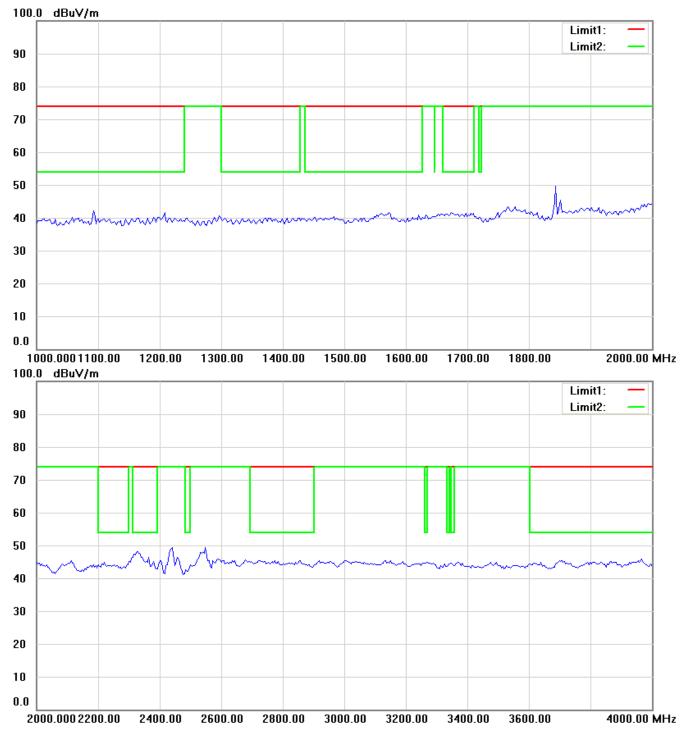


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only. 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report.
- 3



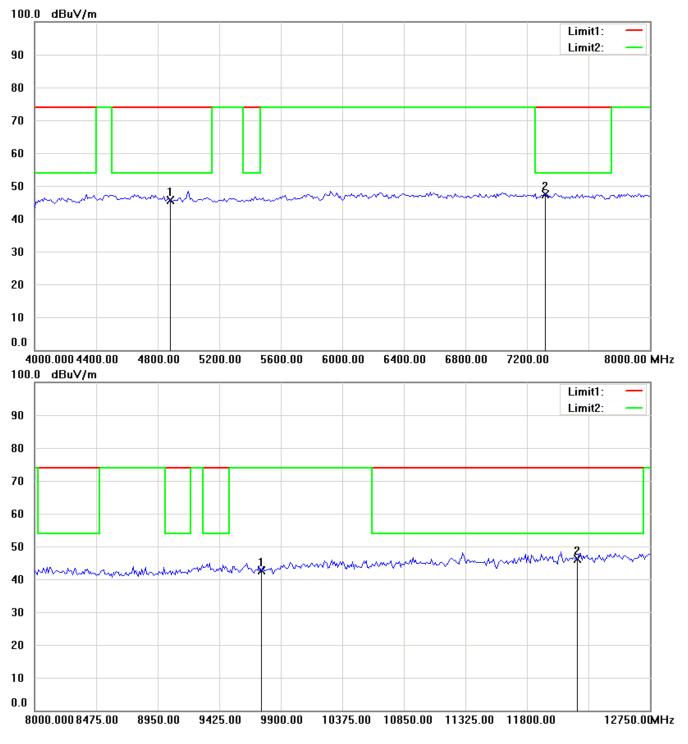


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.



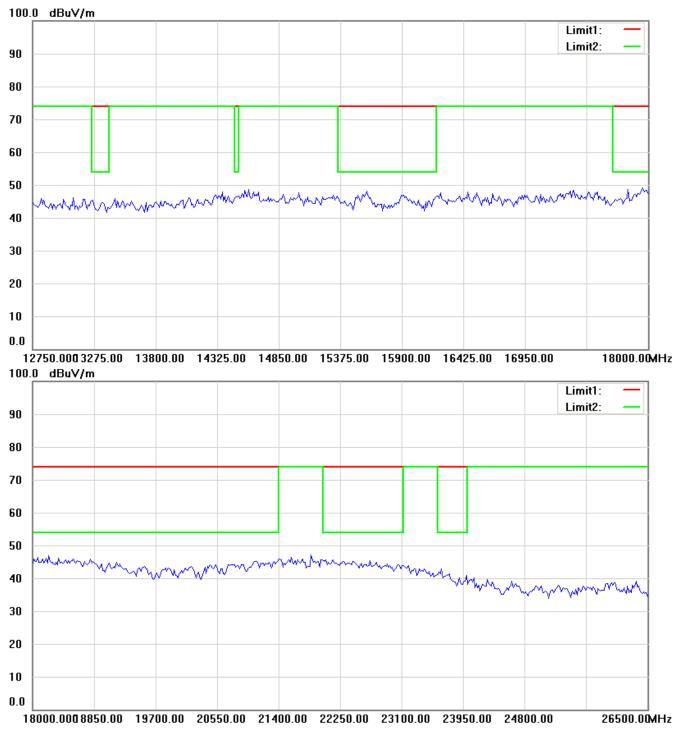

- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report.
- 3



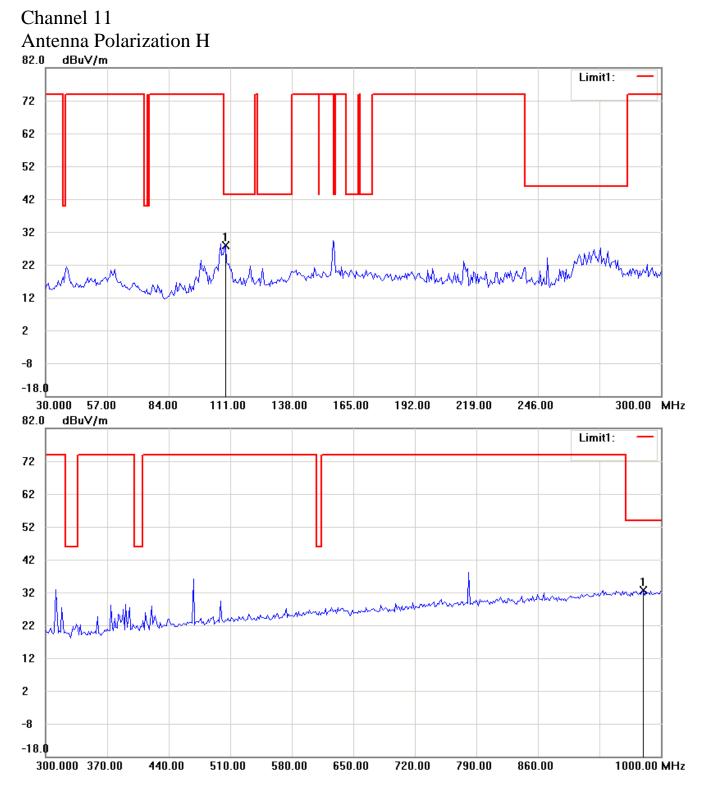


Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.

The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report. 2


3



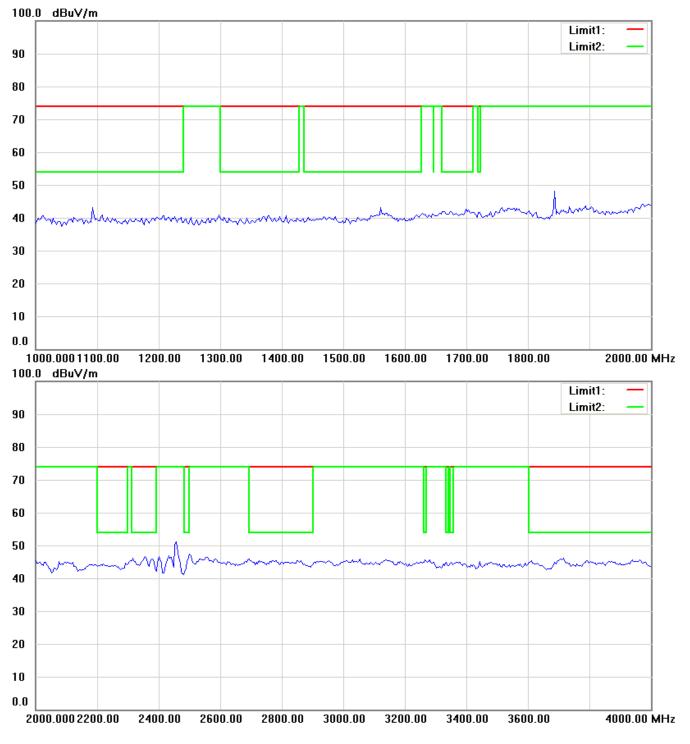


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only. 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report.
- 3



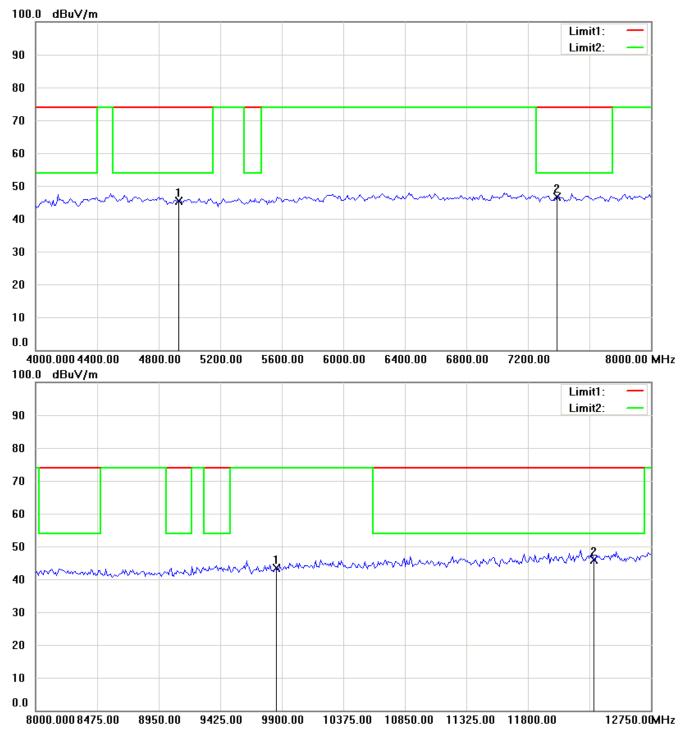

- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.




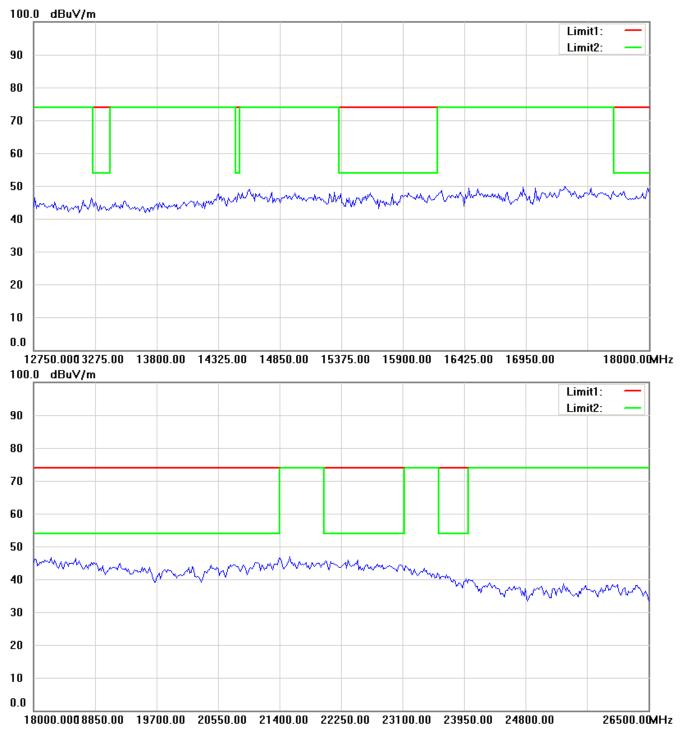

- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report.
- 3




Antenna Polarization V

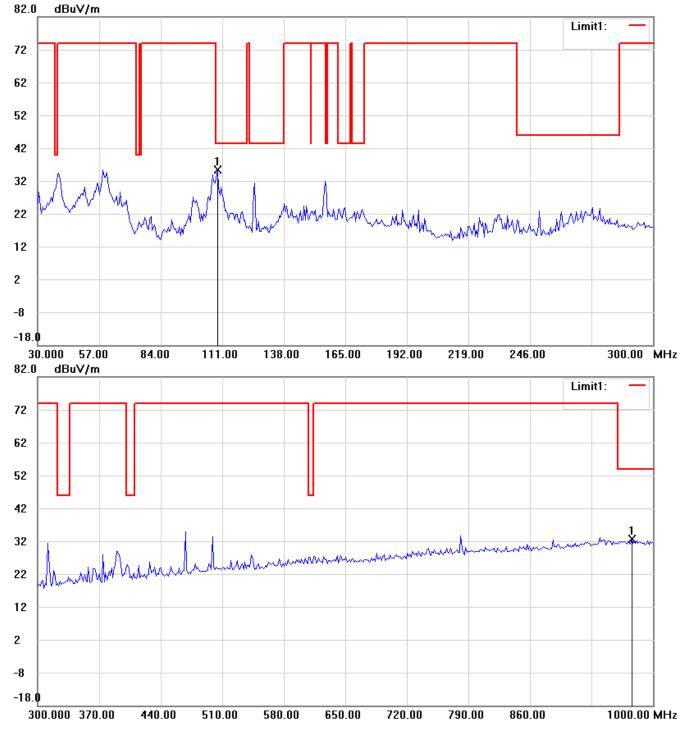


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report. 2
- 3



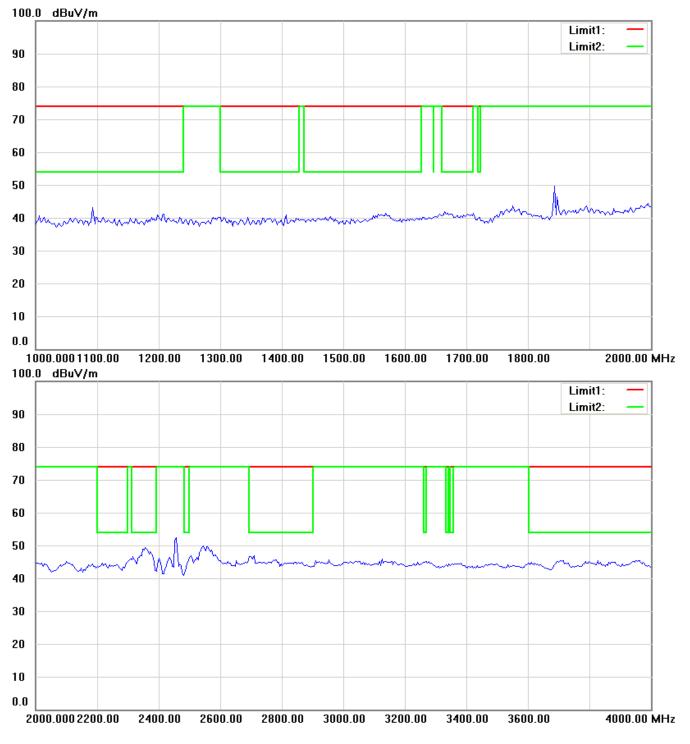


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only. 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report.
- 3



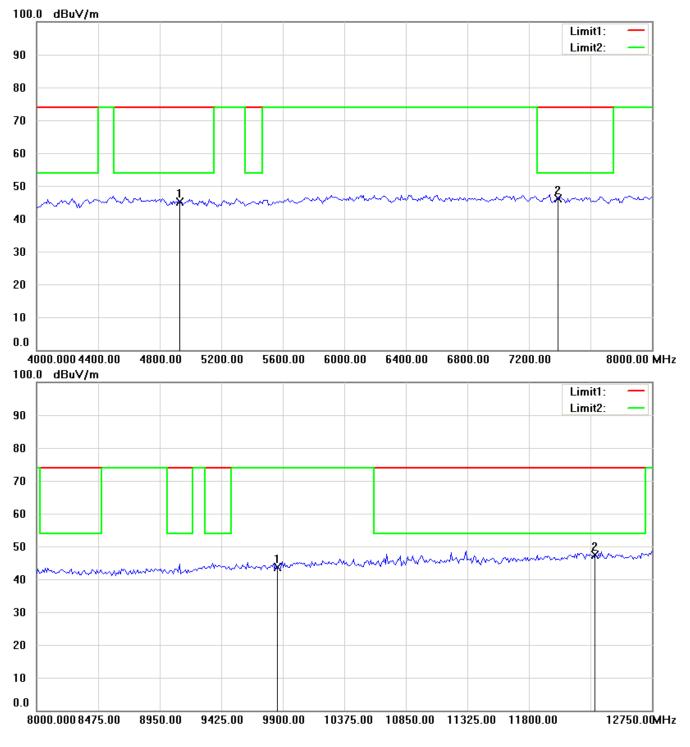


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.



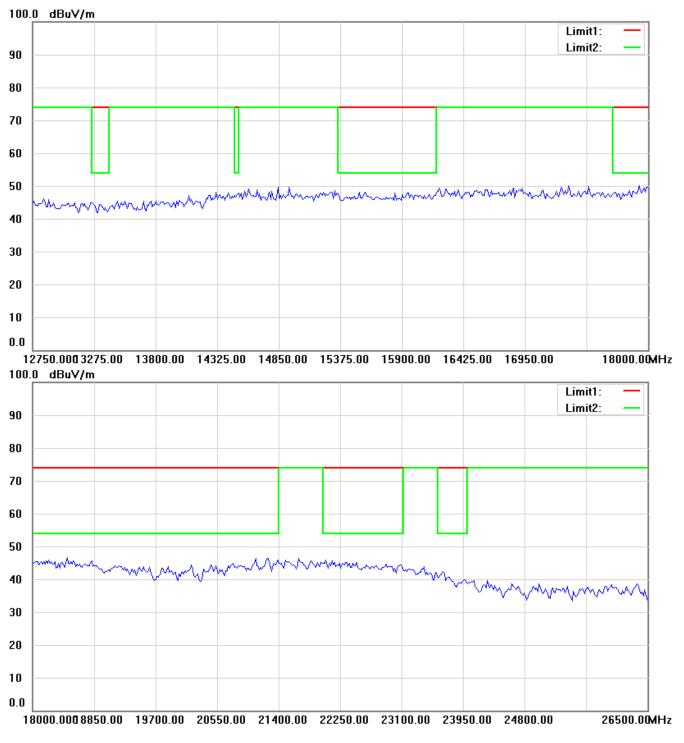

- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.



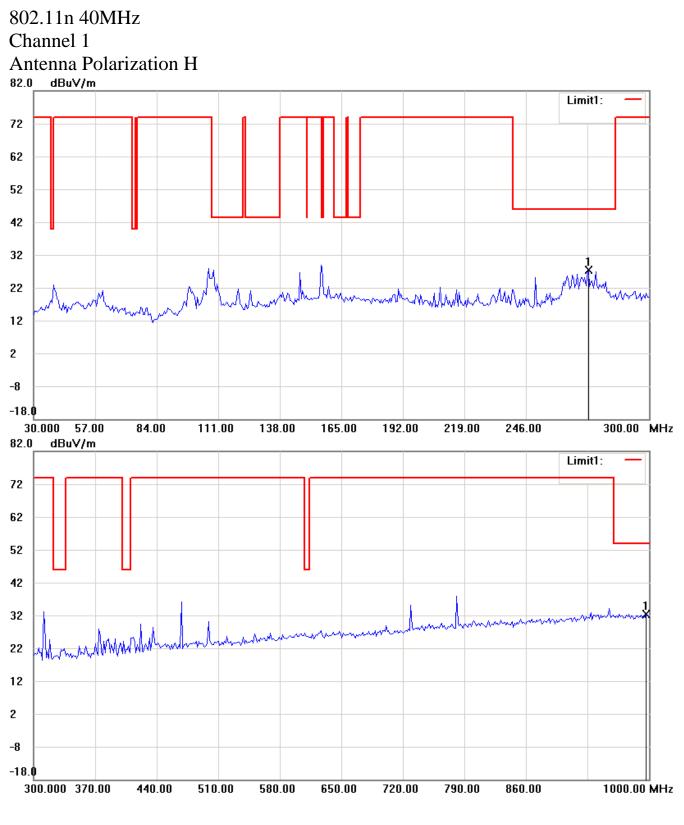


Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only. 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the

The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report.


3



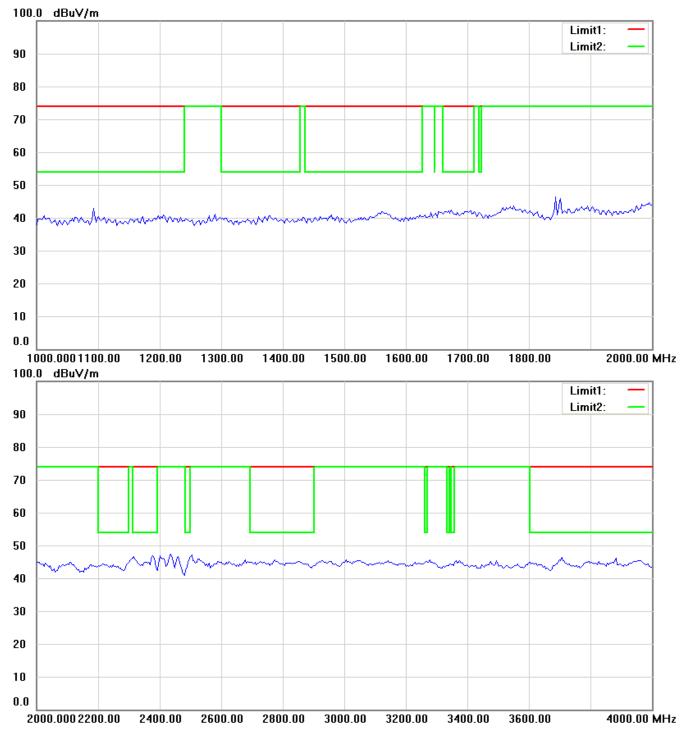


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.



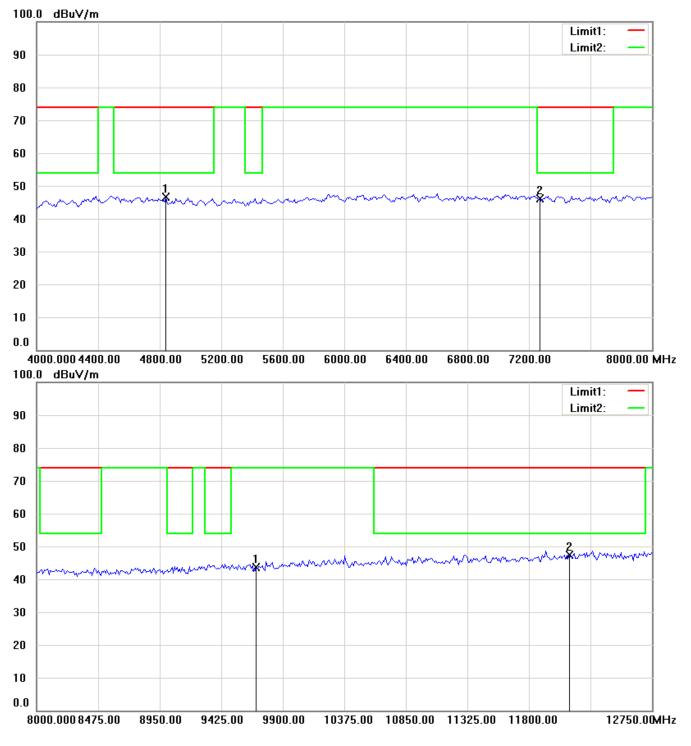

- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.




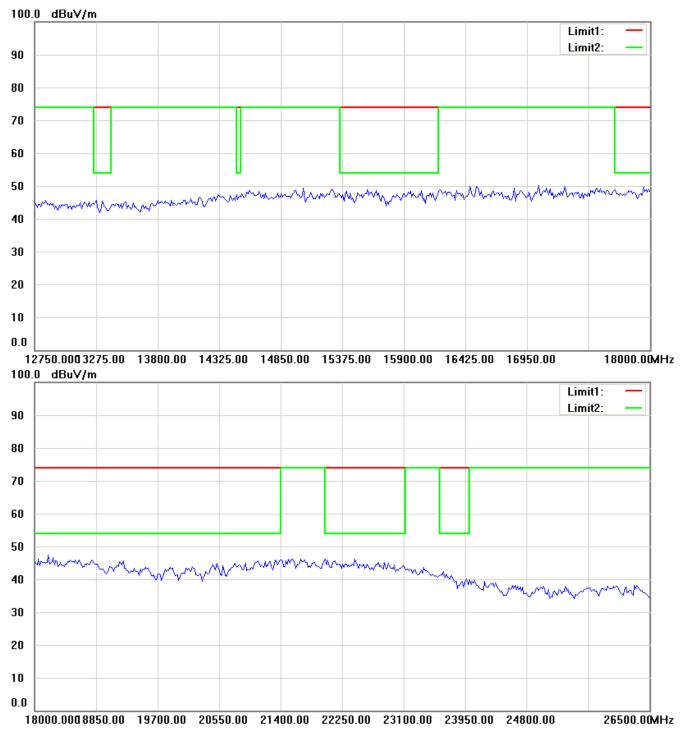

- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.




Antenna Polarization V

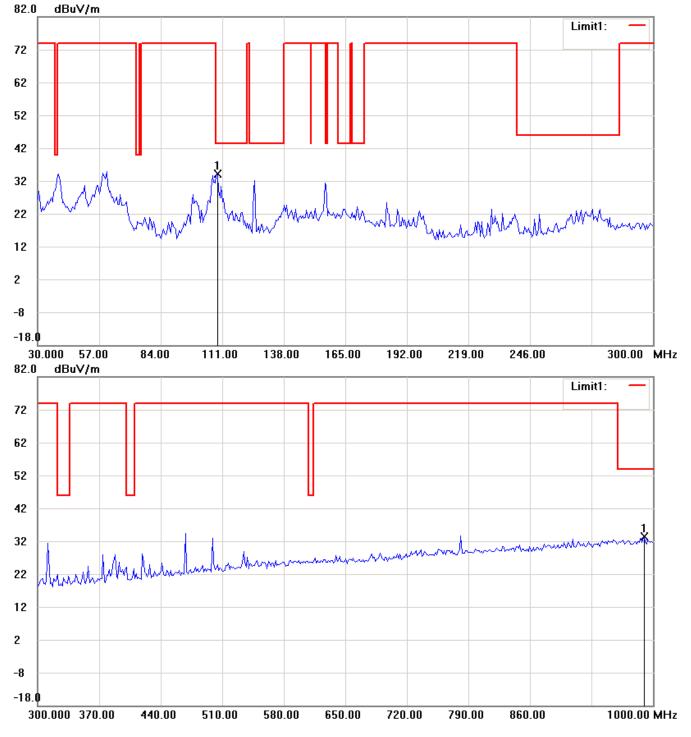


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report. 2
- 3



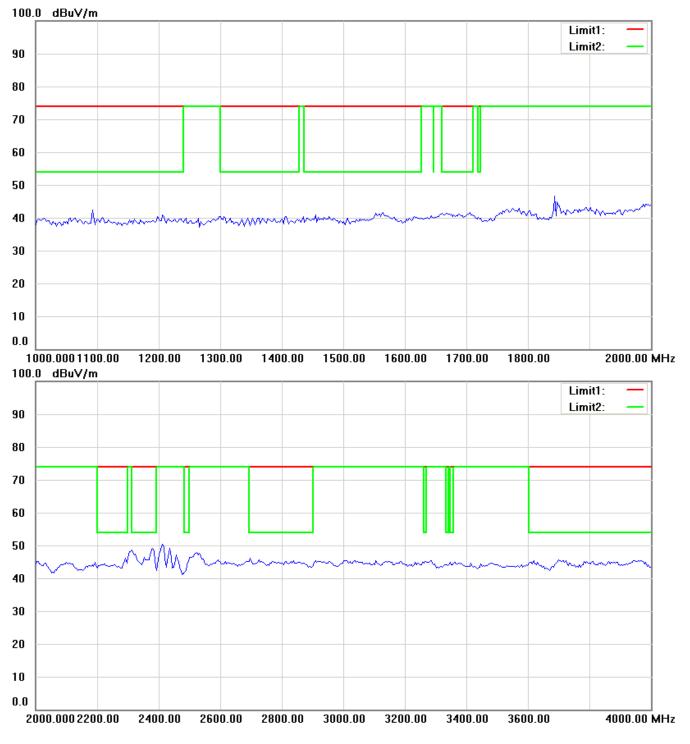


- Note:
 Up Line: Peak Limit Line, Down Line: Ave Limit Line
 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



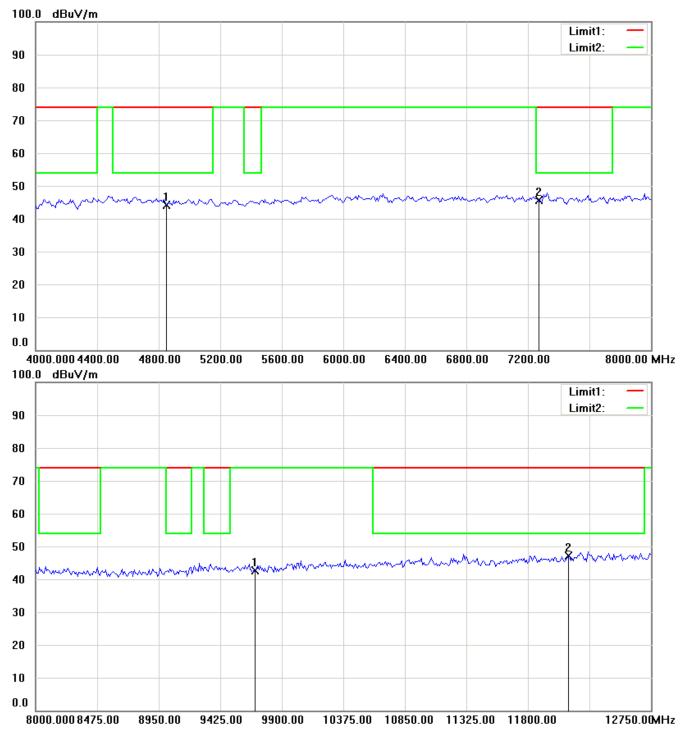


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.



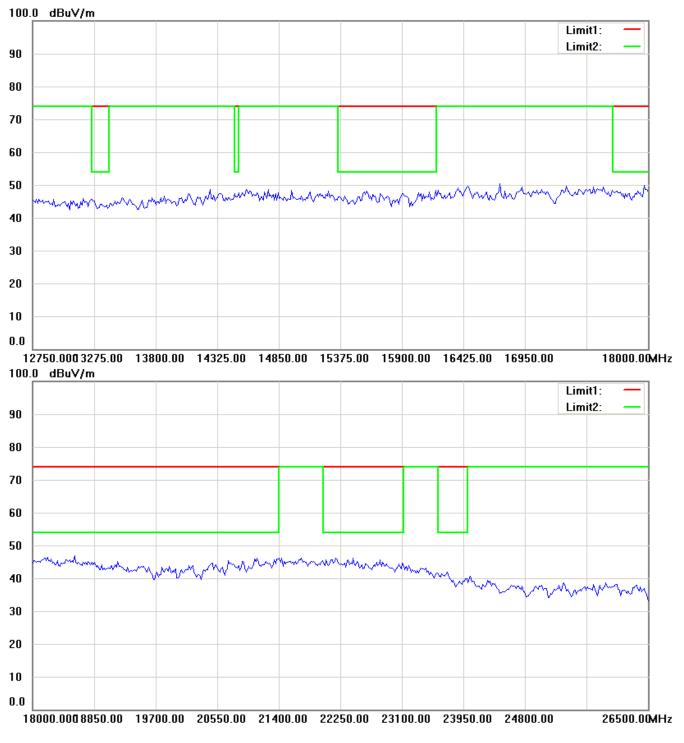

- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report.
- 3



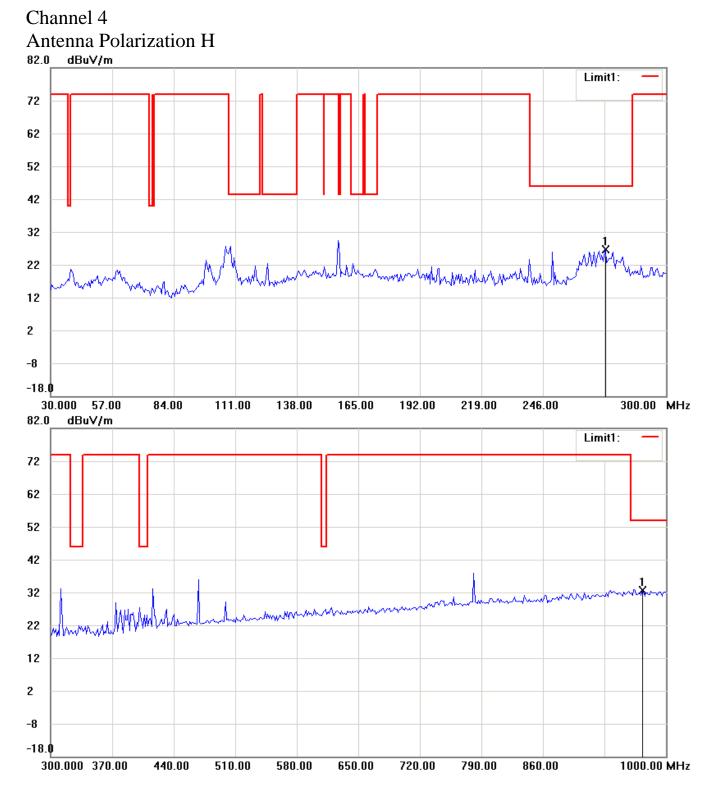


Note: Up Li 1 T

Line: Peak Limit Line, Down Line: Ave Limit Line The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.

The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report. 2


3



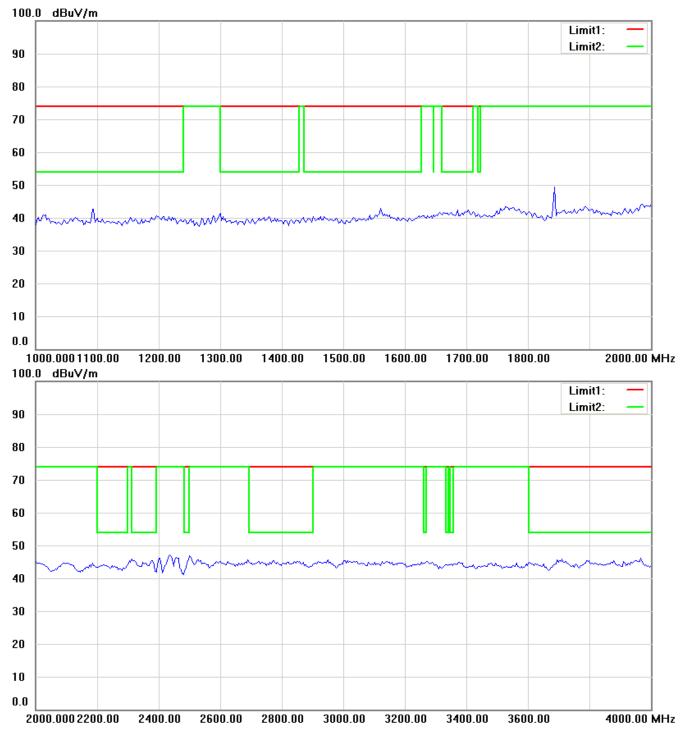


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only. 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report.
- 3



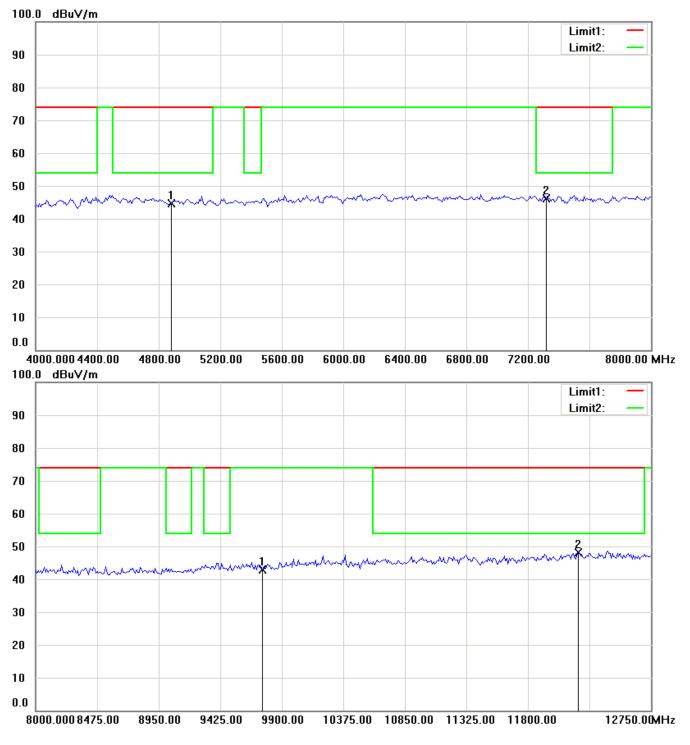

- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.




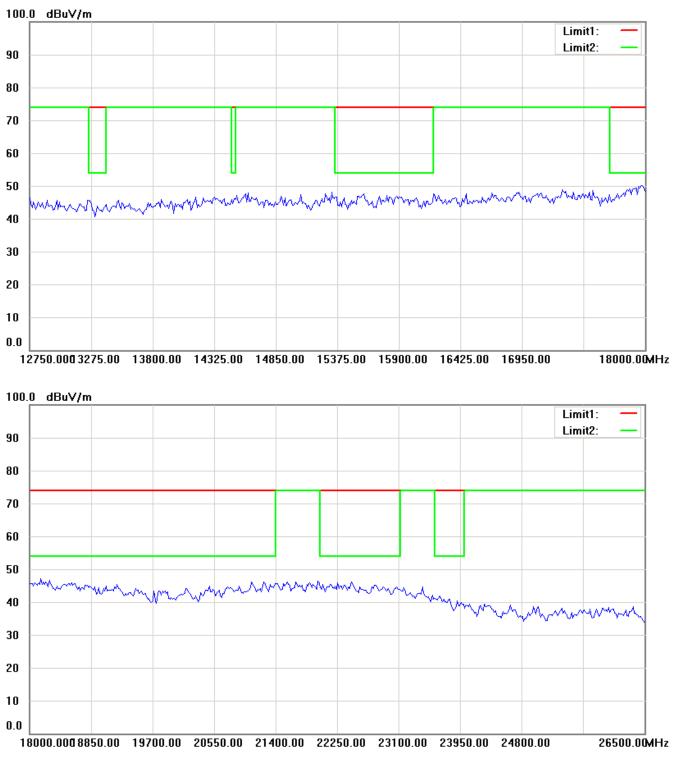

- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report. 2
- 3




Antenna Polarization V

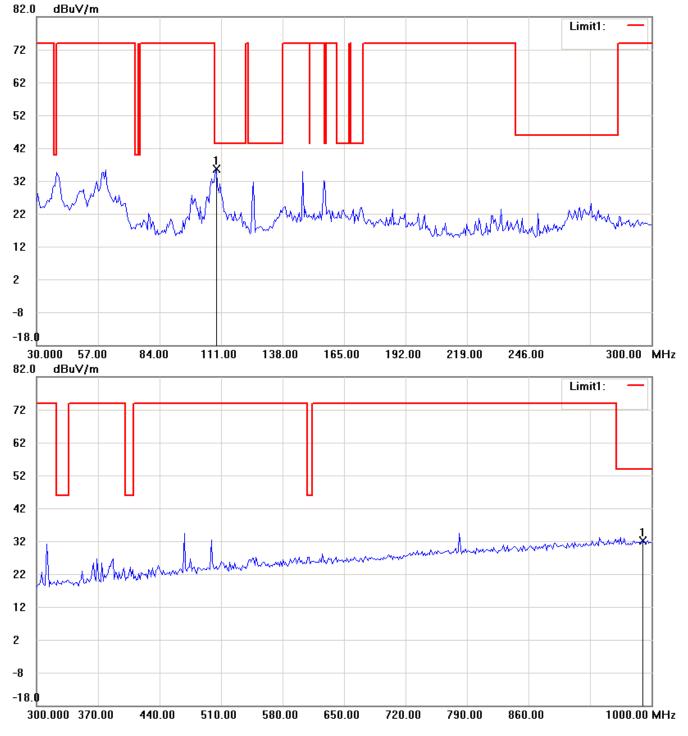


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report.
- 3



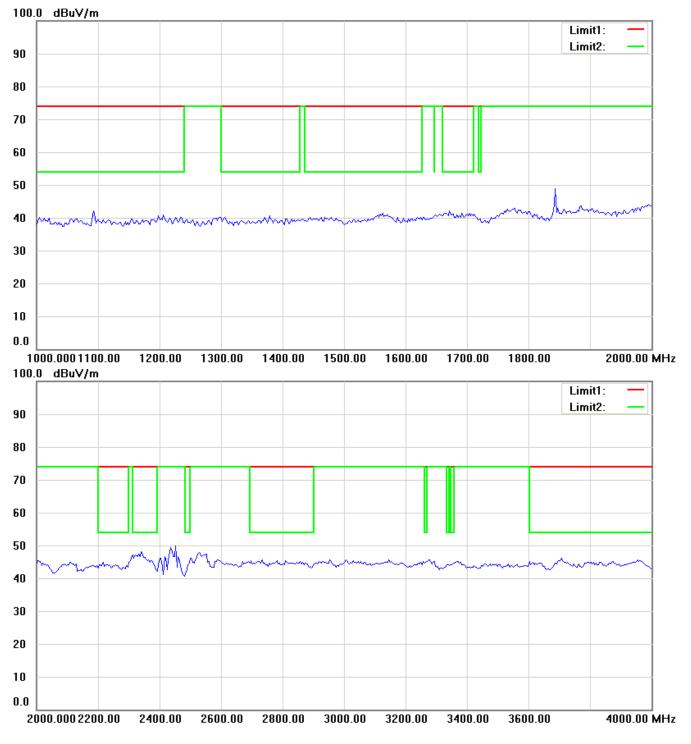


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only. 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report.
- 3



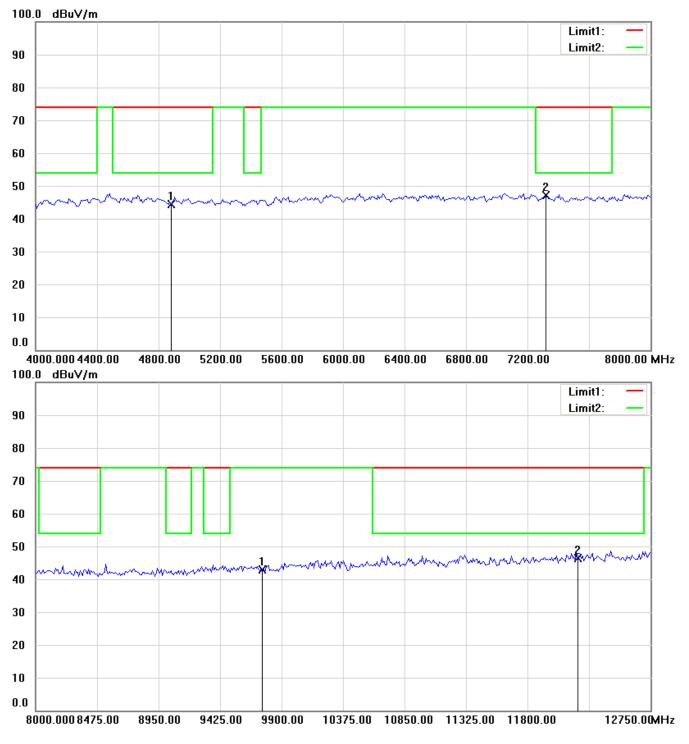


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.



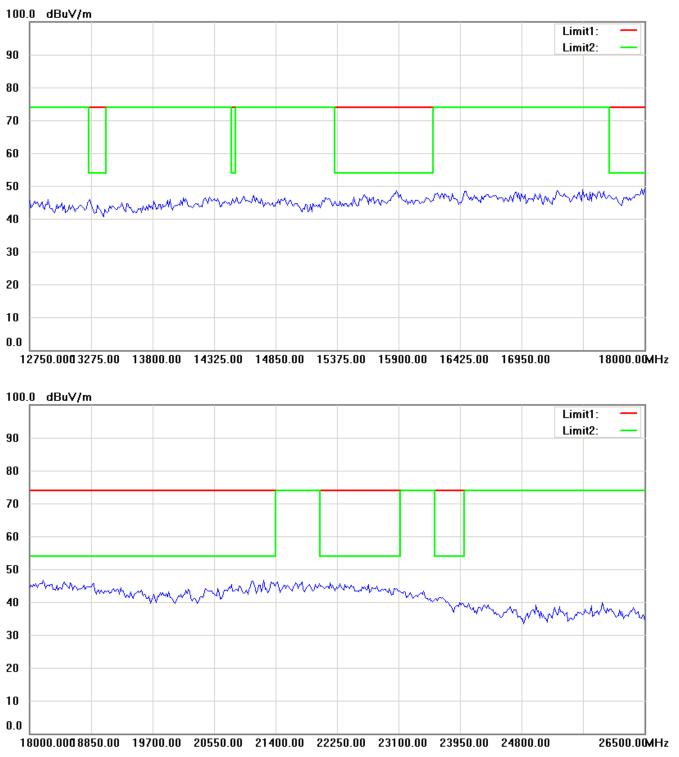

- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report. 2
- 3



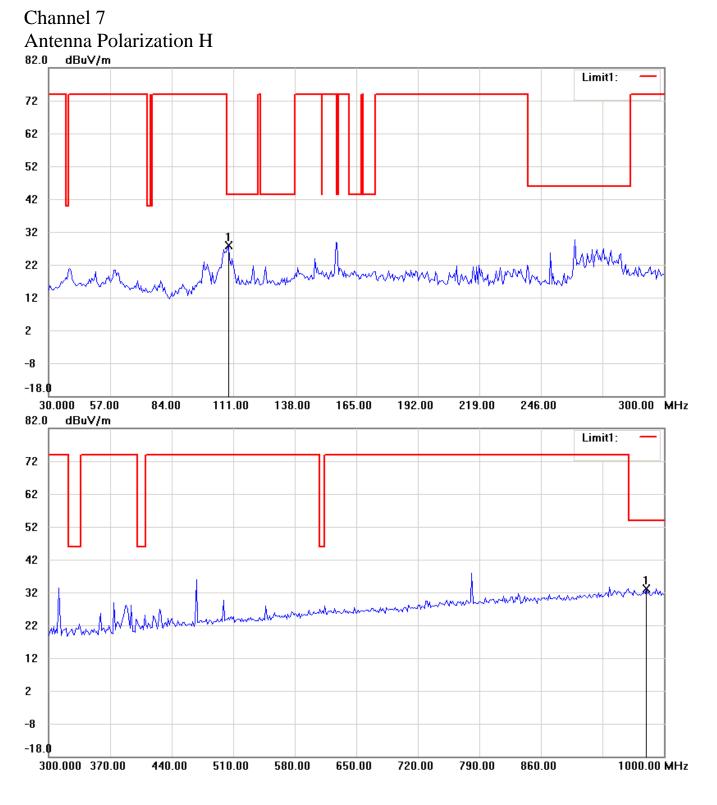


Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.

The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report. 2


3



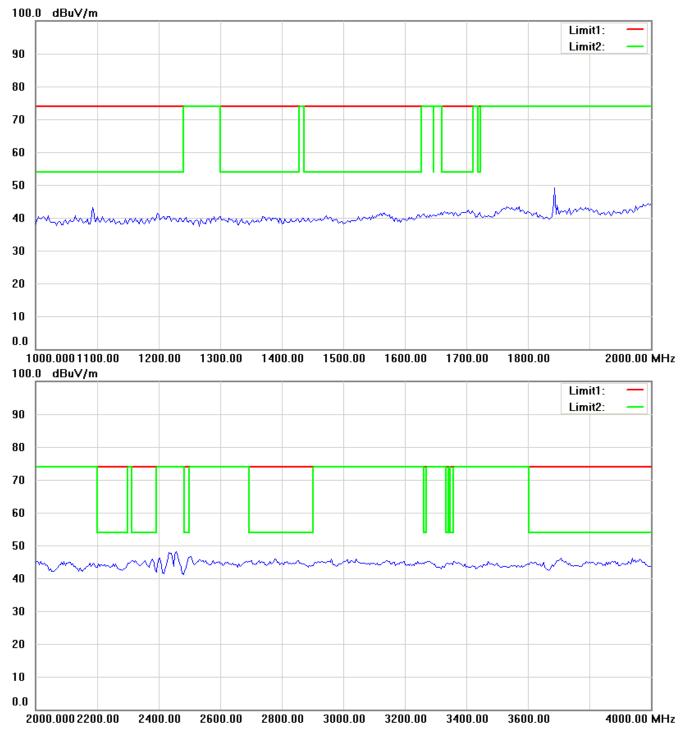


- Note:
 Up Line: Peak Limit Line, Down Line: Ave Limit Line
 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 3 For corrected test results are listed in the relevant table of radiated test data of this test report.



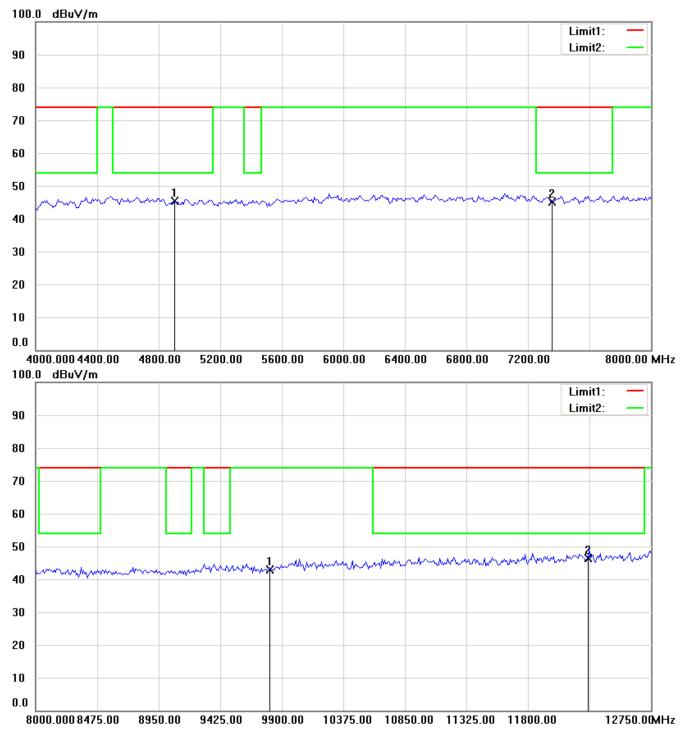

- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.




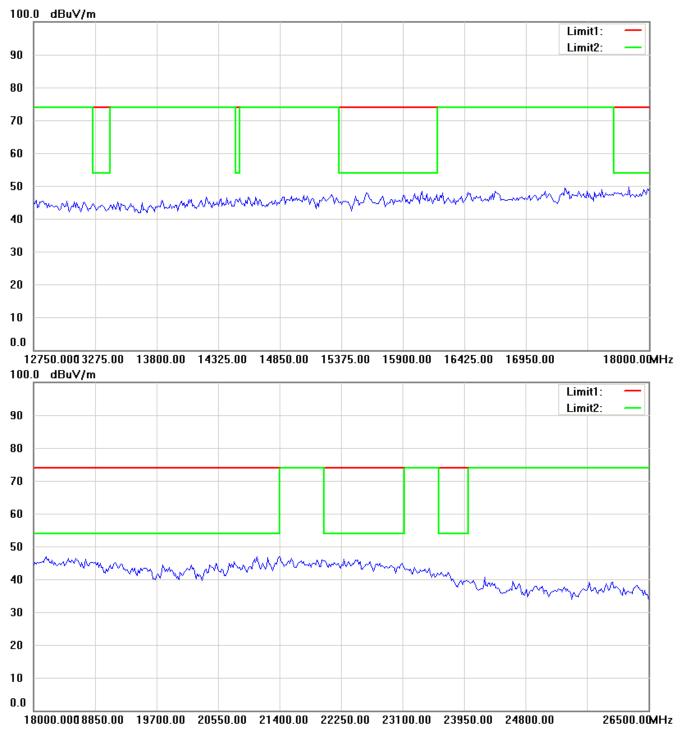

- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.




Antenna Polarization V

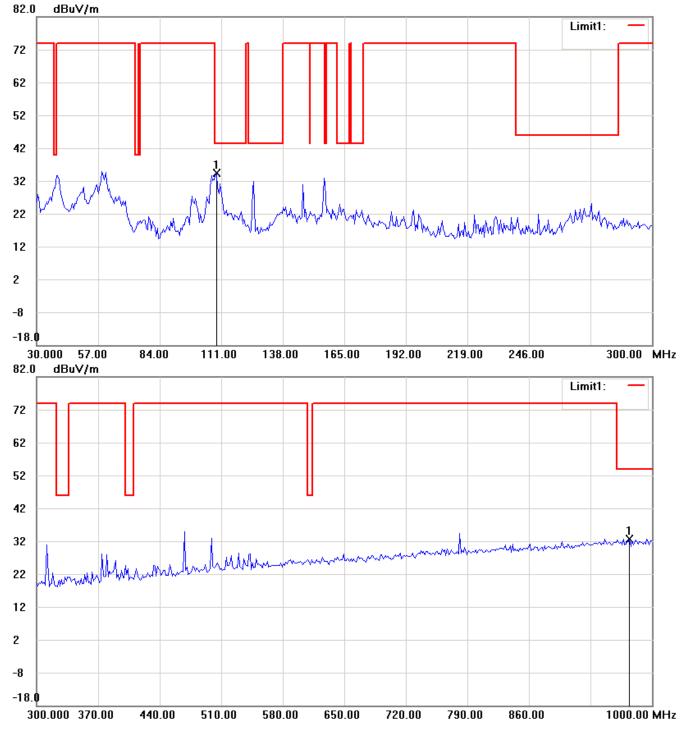


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report. 2
- 3



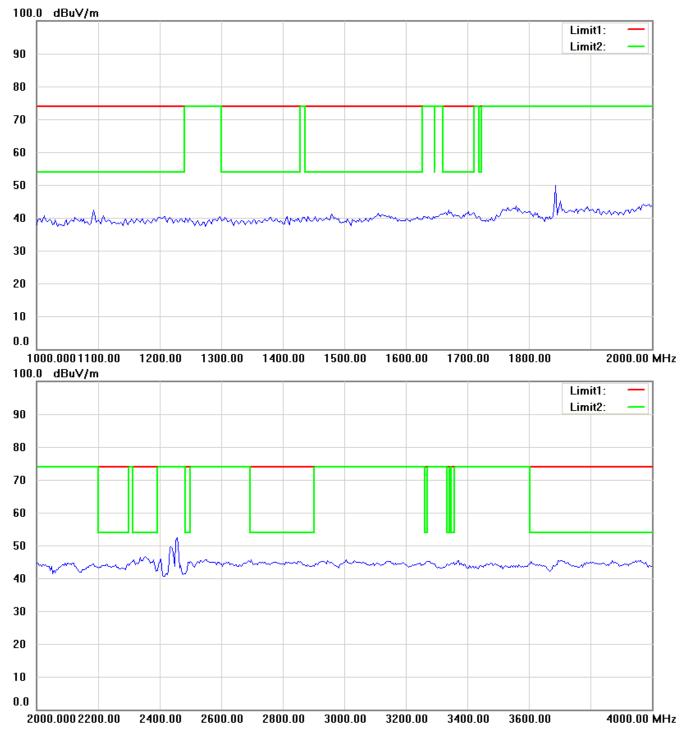


- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only. 2 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report.
- 3



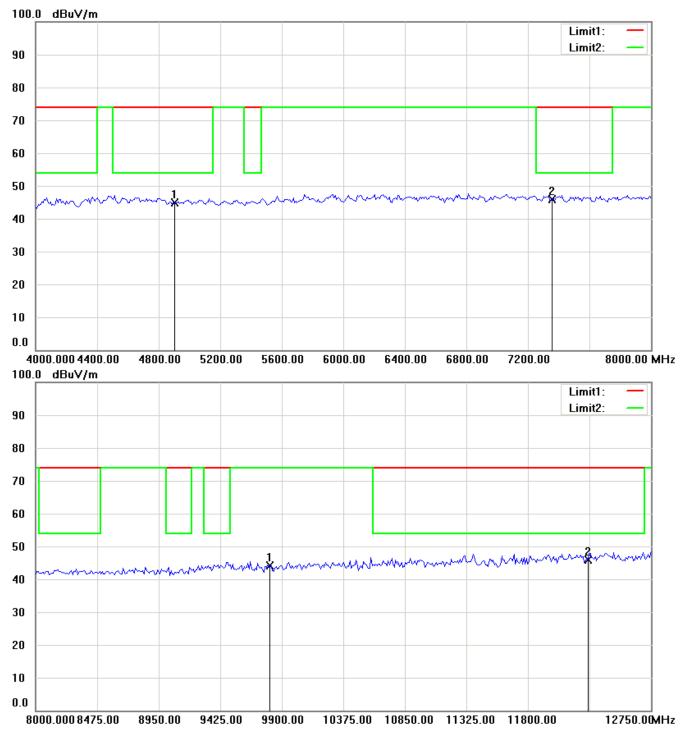

- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line
 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
 The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
 For corrected test results are listed in the relevant table of radiated test data of this test report.



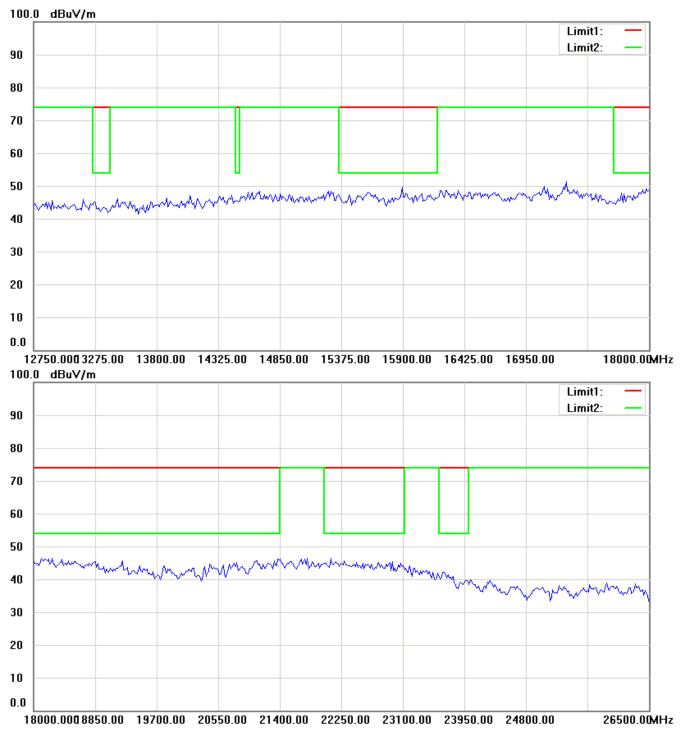

- Note: Up Line: Peak Limit Line, Down Line: Ave Limit Line 1 The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
- 2
- The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard. For corrected test results are listed in the relevant table of radiated test data of this test report.
- 3