



**ETS Dr.GenZ Taiwan PS Co., Ltd.**

**FCC Registration No.: 930600**

**Industry Canada filed test laboratory Reg. No. IC 5679**

**Accredited Testing Laboratory**



**A2LA Cert.No.: 2300.01**

**PTCRB Accredited Type Certification Test House**

# **FCC**

# **TEST - REPORT**


**FCC Part 15 C for IEEE 802.11 b device**

**FCC ID: RXZ-WU61RL**

**Test report no.: W6M20606-7087-C-1**

## TABLE OF CONTENTS

<b>1</b>	<b>GENERAL INFORMATION .....</b>	<b>3</b>
1.1	NOTES .....	3
1.2	TESTING LABORATORY .....	4
1.2.1	<i>Location</i> .....	4
1.2.2	<i>Details of accreditation status</i> .....	4
1.3	DETAILS OF APPROVAL HOLDER .....	4
1.4	APPLICATION DETAILS .....	5
1.5	GENERAL INFORMATION OF TEST ITEM .....	5
1.6	TEST STANDARDS .....	6
<b>2</b>	<b>TECHNICAL TEST .....</b>	<b>7</b>
2.1	SUMMARY OF TEST RESULTS .....	7
2.2	TEST ENVIRONMENT .....	7
2.3	TEST EQUIPMENT LIST .....	8
<b>3</b>	<b>TEST RESULTS (ENCLOSURE).....</b>	<b>13</b>
3.1	PEAK OUTPUT POWER (TRANSMITTER) .....	14
3.2	EQUIVALENT ISOTROPIC RADIATED POWER .....	15
3.2.1	<i>Transmitter</i> .....	15
3.3	RF EXPOSURE COMPLIANCE REQUIREMENTS .....	15
3.4	TRANSMITTER RADIATED EMISSIONS IN RESTRICTED BANDS.....	16
3.5	SPURIOUS EMISSIONS (TX) .....	17
3.6	MINIMUM 6 DB BANDWIDTH .....	20
3.7	PEAK POWER SPECTRAL DENSITY.....	21
3.8	RADIATED EMISSIONS FROM RECEIVER SECTION OF TRANSCEIVER.....	22
3.9	POWER LINE CONDUCTED EMISSION .....	24
<b>APPENDIX</b>	<b>.....</b>	<b>26</b>
	APPENDIX A.....	27
	APPENDIX B.....	28
	APPENDIX C.....	29
	APPENDIX D.....	30
	APPENDIX E .....	31
	APPENDIX F .....	32
	APPENDIX G.....	33
	APPENDIX H.....	34



Registration number: W6M20606-7087-C-1  
FCC ID: RXZ-WU61RL

**1 General Information**

**1.1 Notes**

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has Passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems.

The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that is performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the ETS DR. GENZ TAIWAN PS CO., LTD.


**Specific Conditions:**

Usage of the hereunder tested device in combination with other integrated or external antennas requires at least additional output power measurements, spurious emission measurements, conducted emission measurements (AC supply lines) and radio frequency exposure evaluations for each individual configuration performed, for certification by FCC.


The test sample is able to work according IEEE 802.11 b.


This report is related to FCC Part 15 C (DSSS device).

**Tester:**

July 18, 2006	Jay Chaing	
_____	_____	_____
Date	ETS-Lab. Name	Signature

**Technical responsibility for area of testing:**

July 18, 2006	Steven Chuang	
_____	_____	_____
Date	ETS Name	Signature



Registration number: W6M20606-7087-C-1  
FCC ID: RXZ-WU61RL

## 1.2 Testing laboratory

### 1.2.1 Location

OATS  
No.5-1, Shuang Sing Village,  
LiShuei Rd., Wanli Township,  
Taipei County 207, Taiwan (R.O.C.)

Company  
ETS Dr.Genx Taiwan PS Co., Ltd.  
6F, NO. 58, LANE 188, RUEY-KUANG RD.  
NEIHU, TAIPEI 114, TAIWAN R.O.C.  
Tel : 886-2-66068877  
Fax : 886-2-66068879

### 1.2.2 Details of accreditation status

#### Accredited testing laboratory

**A2LA-registration number: 2300.01**

**FCC filed test laboratory Reg. No. 930600**

**Industry Canada filed test laboratory Reg. No. IC 5679**

**PTCRB Accredited Type Certification Test House**

## 1.3 Details of approval holder

Name	: Pro-Nets Technology Corporation
Street	: 7F, No.95, Lide St., Chung Ho City
Town	: Taipei 235
Country	: Taiwan R.O.C.
Telephone	: 02-8221-8385#713
Fax	: 02-3234-5818



Registration number: W6M20606-7087-C-1

FCC ID: RXZ-WU61RL

#### 1.4 Application details

Date of receipt of application : Jun. 23, 2006  
Date of receipt of test item : Jun. 28, 2006  
Date of test : from Jun. 29, 2006 to July. 13, 2006

#### 1.5 General information of Test item

Type of test item : USB WIRELESS LAN CARD  
Model Number : WU61RL  
Brand Name : PRO-NETS  
  
Hardware : Ver:1.1  
Software : Ver:1.1.0.0  
Serial number : Test sample without serial number  
Photos : see Annex

#### Technical data

Frequency band : 2.4 GHz – 2.4835 GHz  
Frequency ( ch A) : 2.412 GHz  
Frequency ( ch B) : 2.437 GHz  
Frequency ( ch C) : 2.462 GHz  
Number of Channels : 11  
Operation modes : duplex  
Modulation Type : DSSS / OFDM


Fixed point-to-point operation:  Yes /  No

Type of Antenna : PCB Antenna

Antenna gain of Antenna : 1.42 dBi

Power supply : 120 VAC ( power on pc )

Emission designator : 17M9G1D



Registration number: W6M20606-7087-C-1  
 FCC ID: RXZ-WU61RL

Host device: none

Classification :

Fixed Device	<input checked="" type="checkbox"/>
Mobile Device (Human Body distance > 20cm)	<input type="checkbox"/>
Portable Device (Human Body distance < 20cm)	<input type="checkbox"/>

**Transmitter**

**Unom**

**Power ( ch A)** : Conducted: 15.26 dBm  
**Power ( ch B)** : Conducted: 17.95 dBm  
**Power ( ch C)** : Conducted: 18.65 dBm

**Manufacturer:**


(if different from applicant)

Name : ./.  
 Street : ./.  
 Town : ./.  
 Country : ./.

Additional information: The sample is using WLAN technology according IEEE 802.11 b/g. For this report the function according IEEE 802.11b is considered only. The scheme for frequency generation, spectrum spreading, receiver parameters, synchronization procedure, and other parameters are determined by the mentioned standard above.

**1.6 Test standards**

Technical standard : FCC RULES PART 15 SUBPART B / SUBPART C § 15.247 : September 2005



Registration number: W6M20606-7087-C-1  
FCC ID: RXZ-WU61RL

## **2 Technical test**

### **2.1 Summary of test results**

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

**or**

The deviations as specified in 2.5 were ascertained in the course of the tests performed.

### **2.2 Test environment**

Temperature	: 23 °C
Relative humidity content	: 20 ... 75 %
Air pressure	: 86 ... 103 kPa
Power supply adaptor	: 120 VAC ( power on pc)
Extreme conditions parameters	: --

Registration number: W6M20606-7087-C-1

FCC ID: RXZ-WU61RL

## 2.3 Test Equipment List


No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2005/10/27	2006/10/26
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function Test	
ETSTW-CE 004	ZWEILEITER-V-NETZACHBILDUNG TWO-LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2005/10/25	2006/10/24
ETSTW-CE 005	Line-Impedance Stabilisation Network	NNBM 8126D	137	Schwarzbeck	2005/10/21	2006/10/20
ETSTW-CE 006	IMPULS-BEGRENZER PULSE LIMITER	ESH3-Z2	100226	R&S	2004/11/11	2006/11/10
ETSTW-CE 008	ABSORBING CLAMP	MDS 21	3469	ABSORPTIONS- MESSWANDLER- ZANGE	2005/10/24	2007/10/23
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2005/8/18	2006/8/17
ETSTW-CE 011	Power Line Conducted Emission Only	None	None	ETS	2005/10/25	2006/10/24
ETSTW-CE 012	Dual-Phase-V-Network	NNB-2/16Z	03/10201	Telemeter	2006/6/13	2007/6/12
ETSTW-CS 001	SIGNAL GENERATOR	SMX	849254/003	R&S	2005/10/14	2006/10/13
ETSTW-CS 002	COUPLING AND DECOUPLING NETWORK	CDN S751	19263	SCHAFFNER	2005/10/14	2006/10/13
ETSTW-CS 003	COUPLING AND DECOUPLING NETWORK	CDN T400	19820	SCHAFFNER	2005/10/14	2006/10/13
ETSTW-CS 004	COUPLING AND DECOUPLING NETWORK	CDN M016	20053	SCHAFFNER	2005/10/27	2006/10/26
ETSTW-CS 005	RF Power Amplifier	100A250A	306547	AR	2005/10/14	2006/10/13
ETSTW-CS 008	6 dB Attenuator	HFP-5100-3/06 N M/F	2010876106		In House Certificate	
ETSTW-RE 002	Function Generator	33220A	MY43004982	Agilent	2005/10/14	2007/10/13
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2005/10/24	2006/10/23
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2005/10/29	2006/10/30
ETSTW-RE 005	EMI TEST RECEIVER	ESVS10	843207/020	R&S	2005/10/16	2006/10/15
ETSTW-RE 010	PROGRAMMABLE LINEAR POWER SUPPLY	LPS-305	30503070181	MOTECH	Function Test	
ETSTW-RE 011	PROGRAMMABLE LINEAR POWER SUPPLY	LPS-305	30503070165	MOTECH	Function Test	
ETSTW-RE 017	ANTENNA	HL025	352886/001	R&S	2006/5/4	2008/5/3
ETSTW-RE 018	ANTENNA	AT4560	27212	AR	2004/11/8	2007/11/7
ETSTW-RE 021	SWEEP GENERATOR	SWM05	835130/010	R&S	2005/10/14	2006/10/13
ETSTW-RE 022	AMPLIFIER	8447D	2944A09837	Agilent	2005/10/14	2006/10/13
ETSTW-RE 027	Passive Loop Antenna	6512	34563	EMCO	2004/6/30	2007/6/29
ETSTW-RE 028	Log-Periodic DipoleArray Antenna	3148	34429	EMCO	2006/5/26	2008/5/25
ETSTW-RE 029	Biconical Antenna	3109	33524	EMCO	2006/5/26	2008/5/25
ETSTW-RE 030	Double-Ridged Waveguide Horn Antenna	3117	35224	EMCO	2006/5/3	2008/5/2
ETSTW-RE 032	Millivoltmeter	URV 55	849086/013	R&S	2005/10/17	2006/10/16
ETSTW-RE 033	4CH 1GHz 5GS/s DSO	WAVERUNNER 6100A	LCRY0604P14508	LeCory	2005/8/11	2006/8/10



Registration number: W6M20606-7087-C-1

FCC ID: RXZ-WU61RL

ETSTW-RE 034	Power Sensor	URV5-Z4	839313/006	R&S	2005/10/17	2006/10/16
ETSTW-RE 037	Log-Periodic DipoleArray Antenna	3148	00034546	EMCO	2004/11/18	2006/11/17
ETSTW-RE 038	Log-Periodic DipoleArray Antenna	3148	00034547	EMCO	2004/11/18	2006/11/17
ETSTW-RE 039	Biconical Antenna	3110B	41760	EMCO	2004/11/18	2006/11/17
ETSTW-RE 040	Biconical Antenna	3110B	41761	EMCO	2004/11/18	2006/11/17
ETSTW-RE 042	ANTENNA	HK116	100172	R&S	2005/1/14	2007/1/13
ETSTW-RE 043	ANTENNA	HL223	100166	R&S	2006/5/8	2008/5/7
ETSTW-RE 044	ANTENNA	HL050	100094	R&S	2006/5/29	2008/5/28
ETSTW-RE 048	Triple Loop Antenna	HXYZ 9170	HXYZ 9170-134	Schwarzbeck	2005/3/22	2008/3/21
ETSTW-RE 049	TRILOG Super Broadband test Antenna	VULB 9160	9160-3185	Schwarzbeck	2005/5/19	2007/5/18
ETSTW-RE 055	SPECTRUM ANALYZER	FSU-26	200074	R&S	2005/9/6	2006/9/5
ETSTW-EMI 001	HARMONICS 1000	HAR1000-1P	93	EMC-PARTNER	2005/9/12	2006/9/11
ETSTW-EMS 001	Clamp BASELSTRASSE 160 CH-4242 LAUFEN	CN-EFT1000	354	EMC-PARTNER	2004/11/2	2006/11/1
ETSTW-EMS 002	Frequency Converter	YF-6020	0308014		Function Test	
ETSTW-EMS 003	EMC Immunity Test System	TRA2000IN6	579	EMC-PARTNER	2005/10/27	2006/10/26
ETSTW-EMS 004	ESD generator minizap	ESD2000	016	EMC-PARTNER	2005/10/27	2006/10/26
ETSTW-EMS 005	Attenuator (50Ω)	VERI50	051	EMC-PARTNER	2004/8/31	2006/8/30
ETSTW-EMS 006	Attenuator (1 KΩ)	VERI1K	019	EMC-PARTNER	2004/10/21	2006/10/20
ETSTW-EMS 007	20GΩ Divider	ESD-VERI-V	021	EMC-PARTNER	2006/6/13	2008/6/12
ETSTW-EMS 008	Safety Test Solutions	ELT-400	E-0039	Narda	2005/5/4	2007/5/3
ETSTW-EMS 009	Magnetic Field Antenna	MF1000-1	104	EMC-PARTNER	2004/12/3	2007/12/2
ETSTW-EMS 010	Coupling De-coupling Network	CDN-UTP8	014	EMC-PARTNER	2005/9/1	2008/8/31
ETSTW-EMS 011	Calibration Fixture	F-2031-CF-23MM	451	FCC	2005/8/11	2007/8/11
ETSTW-EMS 012	EM Injection Clamp	F-2031-23MM	476	FCC	2005/8/11	2007/8/10
ETSTW-RS 003	RF Power Amplifier	30S1G3	306933	AR		
ETSTW-RS 004	RF Power Amplifier	150W1000	307009	AR	2005/10/21	2006/10/20
ETSTW-RS 005	Electric Field Probe Type 8.3	EMR-20	BN 2244/20	Narda	2005/9/7	2007/9/6
ETSTW-RS 006	SIGNAL GENERATOR	SML03	101551	R&S	2005/10/21	2006/10/20
ETSTW-GSM 01	SIM Simulator	IT3	B2004-50106	ORGA	2005/9/15	2006/9/14
ETSTW-GSM 02	Universal Radio Communication Tester	CMU 200	103489	R&S	2005/11/15	2006/11/14
ETSTW-GSM 03	Agilent 8960 Test Set 1	E5515C	GB44052675	Agilent	2006/7/13	2008/7/12
ETSTW-GSM 04	Agilent 8960 Test Set 2	E5515C	GB44052665	Agilent	2006/7/13	2008/7/12
ETSTW-GSM 05	Agilent 8960 Test Set 3	E5515C	GB44052652	Agilent	2006/7/16	2008/7/15
ETSTW-GSM 06	Agilent 8960 Test Set 4	E5515C	GB44052684	Agilent	2006/7/16	2008/7/15
ETSTW-GSM 07	Agilent 8960 Test Set 5	E5515C	GB44052658	Agilent	2006/7/13	2008/7/12
ETSTW-GSM 08	Agilent 8960 Test Set 6	E5515C	GB44052666	Agilent	2006/7/16	2008/7/15



Registration number: W6M20606-7087-C-1  
 FCC ID: RXZ-WU61RL

ETSTW-GSM 10	Combiner Wessex / Anite	B4605/100	053	Wessex / Anite	2006/7/13	2008/7/12
ETSTW-GSM 11	GSM 850,900,1800,1900 Test system	TS8950G		R&S	2005/11/1	2006/10/31
ETSTW-GSM 12	Acoustical Calibrator	4231	2463874	Brüel&Kjær	2005/10/31	2006/10/30
ETSTW-GSM 13	Conditioning Amplifier	2690-0S2	2437856	Brüel&Kjær		
ETSTW-GSM 14	Telephone Test Head	4602B	2465324	Brüel&Kjær		
ETSTW-GSM 15	Mouth Simulator	4227	2462516	Brüel&Kjær		
ETSTW-GSM 16	TEMP.&HUMIDITY CHAMBER	GTH-120-40-1P-U	MAA0501002	GIANT FORCE	2005/12/29	2006/12/28
ETSTW-GSM 18	AUDIO ANALYZER	UPL16	100173	R&S	2005/10/29	2006/10/28
ETSTW-GSM 24	Vibration Testing System	VS-100V	5494	Vibration	2005/12/20	2006/12/19

Registration number: W6M20606-7087-C-1  
FCC ID: RXZ-WU61RL

## 2.4 General Test Procedure

**POWER LINE CONDUCTED INTERFERENCE:** The procedure used was ANSI STANDARD C63.4-2003 using a 50 $\mu$ H LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

**RADIATION INTERFERENCE:** The test procedure used was according to ANSI STANDARD C63.4-2003 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The ambient temperature of the UUT was 23°C with a humidity of 40 %.

**FORMULA OF CONVERSION FACTORS:** The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB $\mu$ V) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:


Freq (MHz)      METER READING + ACF + CABLE LOSS (to the receiver) = FS  
33                      20 dB $\mu$ V + 10.36 dB + 6 dB = 36.36 dB $\mu$ V/m @3m

The UUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table) and arranged according to ANSI C63.4-2003 Section 13.1.2. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

Measurements were made by ETS Dr.Genx Taiwan PS Co., Ltd. at the registered open field test site located at No.5-1, Shuang Sing Village, LiShuei Rd., Wanli Township, Taipei County 207, Taiwan (R.O.C.) The Registration Number: 930600.



Registration number: W6M20606-7087-C-1  
FCC ID: RXZ-WU61RL

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

The formula is as follows:

Average = Peak + Duty Factor


Duty Factor =  $20 \log(\text{dwell time}/T)$

T = 100ms when the pulse train period is over 100 ms or the period of the pulse train.

Modified Limits for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

ANTENNA & GROUND:

**This unit uses PCB Antenna. (see photos)**




Registration number: W6M20606-7087-C-1  
 FCC ID: RXZ-WU61RL

**3 Test results (enclosure)**

TEST CASE	Para. Number	Required	Test passed	Test failed
Peak Output Power	15.247(b)(3)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Equivalent radiated Power	15.247(b)(3)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Spurious Emissions radiated – Transmitter operating	15.247(c)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Band Edge Measurement	15.247(c)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Minimum 6 dB Bandwidth	15.247(a)(2)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Peak Power Spectral Density	15.247(d)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Radiated Emission from Digital Part And Receiver L.O.	15.109	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Power Line Conducted Emission	15.207	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

The follows is intended to leave blank.



Registration number: W6M20606-7087-C-1  
 FCC ID: RXZ-WU61RL

**3.1 Peak Output Power (transmitter)**

FCC Rule: 15.247(b)(3)

This measurement applies to equipment with an integral antenna and to equipment with an antenna connector and equipped with an antenna as declared by the applicant.

The power was measured with modulation (declared by the applicant).

Test condition		Conducted Power		
		Channel A	Channel B	Channel C
		[dBm]	[dBm]	[dBm]
$T_{nom} = 23^{\circ}C$	$V_{nom} = 120\ V$	15.26	17.95	18.65
Measurement uncertainty		< 3 dB		

Test condition $T_{nom} = 23^{\circ}C, V_{nom} = 120\ V$	Signal Field strength TX highest power mode dB $\mu V/m$
Frequency [MHz]	
2462	102.98
Measurement uncertainty	< 3 dB


Remarks: The diagrams for the field strength measurements are included in Appendix.

Limits:

Frequency MHz	Power dBm
902 - 928	30
2400 – 2483.5	30
5725 – 5850	30

In case of employing transmitter antennas having antenna gain > 6 dBi and using fixed point-to-point operation consider §15.247 (b)(4)

Test equipment used: ETSTW-RE 003 , ETSTW-RE 004 , ETSTW-RE 017 , ETSTW-RE 030 ,  
 ETSTW-RE 044 , ETSTW-RE 055



Registration number: W6M20606-7087-C-1  
 FCC ID: RXZ-WU61RL

**3.2 Equivalent isotropic radiated power**

FCC Rule: 15.247(b)(3)

EIRP = max. conducted output power + antenna gain  
 EIRP = 18.65 dBm + 1.42 dBi  
 = 20.07 dBm

Limit: EIRP = +36 dBm for Antenna gain <6dBi

**3.2.1 Transmitter**

Integral Antenna:

At the transmitter the measurement was transacted with the modulation declared by the manufacturer and the maximum available output power of the EUT.

In this arrangement the EUT fulfils the requirements of the FCC rules § 15.247, subpart C, section b.

**3.3 RF Exposure Compliance Requirements**

The test sample is a WLAN access point intended for fixed installation.

FCC OET Bulletin 65 Edition 97.01 determines the equations for predicting RF fields and applicable limits.

The prediction for power density in the far-field but will over-predict power density in the near field, where it could be used for walking a “worst case” or conservative prediction.

$$S = \frac{PG}{4 \pi R^2}$$

S – Power Density

P – Output power ERP

R – Distance


D – Cable Loss

AG – Antenna Gain G = AG-D

Item	Unit	Value	Remarks
P	mW	73.28245	Peak value
D	dB		
AG	dBi	1.4	
G		1.42	Calculated Value
R	cm	20	Assumed value
S	mW/cm <sup>2</sup>	0.02070	Calculated value

Limits:

Limit for General Population / Uncontrolled Exposure	
Frequency (MHz)	Power Density (mW/cm <sup>2</sup> )
1500 – 100.000	1,0



Registration number: W6M20606-7087-C-1  
 FCC ID: RXZ-WU61RL

**3.4 Transmitter Radiated Emissions in Restricted Bands**

FCC Rules: 15.247 (c), 15.205, 15.209, 15.35

Radiated emission measurements were performed from 30 MHz to 1000 MHz.

For radiated emission tests, the analyzer setting was as followings:

Frequency  $\leq$  1 GHz, RBW:100 kHz, VBW: 100 kHz (Peak measurements)

Frequency  $>$  1 GHz, RBW: 1 MHz, VBW: 1 MHz (Peak measurements)

Frequency  $>$  1 GHz , RBW:1 MHz , VBW: 100Hz (Average measurements)

Limits.

For frequencies below 1GHz:

Frequency of Emission (MHz)	Field strength (microvolts/meter)	Field Strength (dB microvolts/meter)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above	500	54.0

For frequencies above 1GHz (Average measurements).

Guidance on Measurement of DSSS Systems:

“If the emission is pulsed, modify the unit for continuous operation, use the setting shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.”

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty cycle correction =  $20 \log (\text{dwell time} / 100\text{ms})$

No duty cycle correction was added to the reading.

$54.0\text{dB } \mu\text{V/m} + 20 \text{ dB} = 74 \text{ dB } \mu\text{V/m}$

Remarks: see attached diagrams

Test equipment used: ETSTW-RE 003 , ETSTW-RE 004 , ETSTW-RE 017 , ETSTW-RE 030 ,  
 ETSTW-RE 049 , ETSTW-RE 055





Registration number: W6M20606-7087-C-1

FCC ID: RXZ-WU61RL

### 3.5 Spurious Emissions (tx)

Spurious emission was measured with modulation (declared by manufacturer).

In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))

FCC Rule: 15.247(c), 15.35

For out of band emissions that are close to or that exceed the 20 dB attenuation requirement described in the specification, radiated measurements were performed at a 3 m separation distance to determine whether these emissions complied with the general radiated emission requirement.

Limits:

For frequencies below 1GHz:

Max. reading – 20 dB

102.98 dB  $\mu$  V/m- 20 dB= 82.98 dB  $\mu$  V/m

Guidance on Measurement of DSSS Systems:

“If the emission is pulsed, modify the unit for continuous operation, use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.”

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty Cycle correction =  $20 \log(\text{dwell time}/100\text{ms})$

For frequencies above 1GHz (Peak measurements).

Limit = max. aver. Reading-20dB+20dB(because Peak detector is used)

82.98 dB  $\mu$  V/m

For frequencies above 1GHz (Average measurements).


Max. reading – 20dB

No duty cycle correction was added to the reading

102.98 dB  $\mu$  V/m- 20 dB= 82.98 dB  $\mu$  V/m

Remarks: see attached diagrams

Test equipment used: ETSTW-RE 003 , ETSTW-RE 004 , ETSTW-RE 017  
ETSTW-RE 030 , ETSTW-RE 049 , ETSTW-RE 055



Registration number: W6M20606-7087-C-1  
 FCC ID: RXZ-WU61RL

SAMPLE CALCULATION OF LIMIT. All results will be updated by an automatic measuring system in accordance with point 2.3.

Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

The peak and average spurious emission plots was measured with the average limits.

In the Table being listed the critical peak and average value and exhibit the compliance with the above calculated Limits.

If in the column's correction factor states a value then the max. Field strength in the same row is corrected by a value gained from the "Duty-Cycle Correction Factor".

**Summary table with radiated data of the test plots**

**Low Channel**

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuV)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Table Azimuth (degree)	Antenna Height (cm)
H	6432.148	48.89	6.01	PK	54.9	82.98	28.08	310	184
	2389.579	47.12	2.08	PK	49.2	54	4.8	241	171

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuV)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Table Azimuth (degree)	Antenna Height (cm)
V	2389.579	41.30	2.08	PK	43.38	54.0	10.62	183	159
	6432.239	49.67	6.01	PK	55.68	82.98	27.30	144	211

**Middle Channel**

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuV)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Table Azimuth (degree)	Antenna Height (cm)
H	1625.250	47.89	-6.89	PK	41.00	54.0	13.00	320	184
	6501.002	48.98	6.16	PK	55.14	82.98	27.76	312	158
	9563.126	37.40	10.60	PK	48.00	82.98	34.90	47	171

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuV)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Table Azimuth (degree)	Antenna Height (cm)
V	4865.731	41.76	4.71	PK	46.47	54.0	7.53	182	158
	6501.002	49.05	6.16	PK	55.21	82.98	27.77	111	241
	2385.571	38.50	2.08	PK	40.58	54.0	13.42	41	201



Registration number: W6M20606-7087-C-1

FCC ID: RXZ-WU61RL

**High Channel**

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBUV)	Correction Factor (dB)	Detector	Test Result (dBUV/m)	Compliance Limit (dBUV/m)	Margin (dB)	Table Azimuth (degree)	Antenna Height (cm)
H	4921.843	43.12	4.75	PK	47.87	54.0	6.13	218	182
	6565.130	49.50	5.88	PK	55.38	82.98	27.52	42	199
	1645.290	46.19	-6.80	PK	39.39	82.98	43.51	317	184
	2483.500	58.25	-1.08	PK	57.17	74.0	16.83	310	189
	2483.500	51.36	-1.08	AV	50.28	54.0	3.72	188	214

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBUV)	Correction Factor (dB)	Detector	Test Result (dBUV/m)	Compliance Limit (dBUV/m)	Margin (dB)	Table Azimuth (degree)	Antenna Height (cm)
V	1374.749	45.39	-8.51	PK	36.88	54.0	17.12	92	189
	6565.130	28.51	5.88	PK	34.39	82.98	48.59	196	214
	9619.238	58.44	-10.74	PK	47.70	54.0	6.30	47	241

- Note**
1. Correction Factor = Antenna factor + Cable loss - Preamplifier
  2. The formula of measured value as: Test Result = Corrected Reading + Correction Factor
  3. Detector function in the form : P = Peak, QP = Quasi Peak, AV = Average

Freq. – Frequency Range:

- 1: 30 - 200 MHz
- 2: 200 - 1000 MHz
- 3: 1 - 4 GHz
- 4: 4 - 8 GHz
- 5: 8 - 12 GHz
- 6: 12 - 17 GHz
- 7: 17 - 26.5 GHz

All not in the table noted test results are more than 20 dB below the relevant limits.


All other not noted test polts do not contain significant test results in relation to the limits.

**TEST RESULT (Transmitter):** The unit DOES meet the FCC requirements.

Comment: see attached diagrams

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 030

ETSTW-RE 017, ETSTW-RE 049, ETSTW-RE 055□□



Registration number: W6M20606-7087-C-1  
 FCC ID: RXZ-WU61RL

**3.6 Minimum 6 dB Bandwidth**

The analyzer ResBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK reading was taken, two markers were set 6 dB below the maximum level on the right and the left side of the emission. The 6 dB bandwidth is the frequency difference between the two markers.


Test conditions		6 dB Bandwidth		
		Channel A	Channel B	Channel C
$T_{nom} = 23^{\circ}C$	$V_{nom} = 120 V$	12.78 MHz	11.4 MHz	10.92 MHz
Measurement uncertainty		< 10 Hz		

**Limits:**

Frequency Range MHz	Limits
902-928	min 500 kHz
2400-2483.5	min 500 kHz
5725-5850	min 500 kHz

Test equipment used: ETSTW-CE 003 , ETSTW-RE 004 , ETSTW-RE 055

Comment: see attached diagram



Registration number: W6M20606-7087-C-1  
 FCC ID: RXZ-WU61RL

**3.7 Peak Power Spectral Density**

Peak Power Spectral density is a measured at low, middle and high channel.  
 The Peak Power Spectral Density result which was measured with a bandwidth of 3 kHz, and Set VBW > RBW, sweep= (SPAN/3 kHz) e.g., for a span of 1.5 MHz, the sweep should be  $1.5 \times 10^6 \div 3 \times 10^3 = 500$  seconds. The peak level measured must be no greater than + 8 dBm.

Test conditions		Peak Power Spectral Density (3 kHz)		
		Channel A [dBm]	Channel B [dBm]	Channel C [dBm]
$T_{nom} = 23^{\circ}C$	$V_{nom} = 120 \text{ V}$	-11.51	-11.03	-10.68
Measurement uncertainty		< 3 Hz		

**Limits:**

Frequency Range MHz	dBm
902-928	8
2400-2483,5	8
5725-5850	8

Test equipment used: ETSTW-CE 003 , ETSTW-RE 004 , ETSTW-RE 055

Comment: see attached diagram

Registration number: W6M20606-7087-C-1

FCC ID: RXZ-WU61RL

### 3.8 Radiated Emissions from Receiver Section of Transceiver

FCC Rule: 15.109

#### Summary table with radiated data of the test plots

##### RX

##### Low Channel

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuV)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Table Azimuth (degree)	Antenna Height (cm)
H	3278.557	47.30	0.25	PK	47.55	54	6.45	79	192
	7535.070	44.94	6.86	PK	51.80	54	2.2	312	174

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuV)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Table Azimuth (degree)	Antenna Height (cm)
V	1498.998	58.62	-7.22	PK	51.4	54	2.6	41	212
	1667.334	56.91	-6.81	PK	50.1	54	3.9	215	184

##### Middle Channel

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuV)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Table Azimuth (degree)	Antenna Height (cm)
H	2370.741	45.71	2.09	PK	47.8	54	6.2	250	194
	3272.545	47.95	0.25	PK	48.2	54	5.8	78	191


Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuV)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Table Azimuth (degree)	Antenna Height (cm)
V	1498.998	58.42	-7.22	PK	51.2	54	2.8	42	217
	3284.569	47.87	0.23	PK	48.1	54	5.9	92	200

##### High Channel

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuV)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Table Azimuth (degree)	Antenna Height (cm)
H	2454.910	49	0.2	PK	49.2	54.00	4.8	248	200
	3284.569	49.47	0.23	PK	49.7	54.00	4.3	77	194

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuV)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Table Azimuth (degree)	Antenna Height (cm)
V	1498.998	57.32	-7.22	PK	50.1	54	3.9	40	216
	3278.557	50.95	0.25	PK	51.2	54	2.8	93	201

- Note
1. Correction Factor = Antenna factor + Cable loss - Preamplifier
  2. The formula of measured value as: Test Result = Corrected Reading + Correction Factor
  3. Detector function in the form : P = Peak, QP = Quasi Peak, AV = Average



Registration number: W6M20606-7087-C-1  
 FCC ID: RXZ-WU61RL

**Digital**

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuv)		Correction Factor (dB)	Test Result (dBuV/m)		Compliance Limit (dBuV/m)	Margin (dB)		Table Azimuth (degree)	Antenna Height (cm)
		PK	QP		PK	QP		PK	QP		
H	49.418	17.87	--	13.55	31.42	--	40.0	--	8.58	302	315
	166.272	17.20	--	15.21	32.41	--	43.5	--	11.09	104	324
	464.529	18.17	--	19.19	37.36	--	46.0	--	8.64	219	214
	501.402	20.70	--	19.82	40.52	--	46.0	--	5.48	41	238
	432.464	15.21	--	18.53	33.74	--	46.0	--	12.26	133	240

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuv)		Correction Factor (dB)	Test Result (dBuV/m)		Compliance Limit (dBuV/m)	Margin (dB)		Table Azimuth (degree)	Antenna Height (cm)
		PK	QP		PK	QP		PK	QP		
V	89.959	20.64	--	10.56	31.20	--	43.5	--	12.30	172	207
	166.613	19.99	--	15.21	35.20	--	43.5	--	8.30	107	224
	178.537	18.25	--	14.15	32.40	--	43.5	--	11.10	247	198
	466.132	17.20	--	19.20	36.40	--	46.0	--	9.60	215	325
	716.232	17.36	--	23.84	41.20	--	46.0	--	4.80	324	341
	913.426	15.59	--	26.51	42.10	--	46.0	--	3.90	352	358


- Note**
1. Correction Factor = Antenna factor + Cable loss - Preamplifier
  2. The formula of measured value as: Test Result = Corrected Reading + Correction Factor
  3. Detector function in the form : P = Peak, QP = Quasi Peak, AV = Average

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission (MHz)	Field Strength (microvolts/meter)	Field Strength (dBmicrovolts/meter)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 028, ETSTW-RE 029, □□  
 ETSTW-RE 042, ETSTW-RE 043, ETSTW-RE 055□□

Comment: see attached diagram



Registration number: W6M20606-7087-C-1  
 FCC ID: RXZ-WU61RL

**3.9 Power Line Conducted Emission**

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.


Frequency	Level (dBµV)	
	quasi-peak	average
150 kHz	lower limit line	Lower limit line

LISN type	Frequency Marker	Corrected Reading (dBuV)		Correction Factor	Test Result (dBuV)		Compliance Limit (dBuV)		Margin (dB)		
		QP	AV		dB	QP	AV	QP	AV	QP	AV
N	MHz										
	0.2	28.7	20.4	10.1	38.8	30.5	63.6	53.6	24.8	23.1	
	0.27	24.2	18.7	10.1	34.3	28.8	61.1	51.1	26.8	22.3	
	0.4	21.9	19.1	10.1	32	29.2	57.8	47.8	25.8	18.6	
	0.47	19.2	16.9	10.1	29.3	27	56.5	46.5	27.2	19.5	
	1.54	18.6	16.1	10.1	28.7	26.2	56	46	27.3	19.8	
	5.22	16.9	15.5	10.1	27	25.6	60	50	33	24.4	

LISN type	Frequency Marker	Corrected Reading (dBuV)		Correction Factor	Test Result (dBuV)		Compliance Limit (dBuV)		Margin (dB)		
		QP	AV		dB	QP	AV	QP	AV	QP	AV
L1	MHz										
	0.2	28.6	20.7	10.1	38.7	30.8	63.6	53.6	24.9	22.8	
	0.27	22.4	18.6	10.1	32.5	28.7	61.1	51.1	28.6	22.4	
	0.47	19.9	17.4	10.1	30	27.5	56.5	46.5	26.5	19	
	0.67	17.7	15.7	10.1	27.8	25.8	56	46	28.2	20.2	
	1.81	17.4	15.7	10.1	27.5	25.8	56	46	28.5	20.2	
	15.86	17.6	15.6	10.1	27.7	25.7 0	60	50	32.3	24.3	

- Note: 1. The formula of measured value as: Test Result = Corrected Reading + Correction Factor**
- 2. The Correction Factor = Cable Loss + LISN Insertion Loss**
- 3. Detector function in the form : P = Peak, QP = Quasi Peak, AV = Average**






Registration number: W6M20606-7087-C-1  
FCC ID: RXZ-WU61RL

**Limits:**

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi Peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Test equipment used: ETSTW-CE 001 , ETSTW-CE 003 , ETSTW-CE 004 , ETSTW-CE 006  
Comment: see attached diagram



Registration number: W6M20606-7087-C-1  
FCC ID: RXZ-WU61RL

## **Appendix**

- A Peak Output Power
- B Spurious Emissions radiated
- C Band Edge Measurement
- D Minimum 6dB Bandwidth
- E Peak Power Spectral Density
- F Radiated Emissions from Receiver Section of Transceiver
- G Power Line Conducted Emission
- H Pictures




Registration number: W6M20606-7087-C-1  
FCC ID: RXZ-WU61RL

## **Appendix A**


### Peak Output Power

**The measurement diagram are wideband pre-scan results; only for reference.**

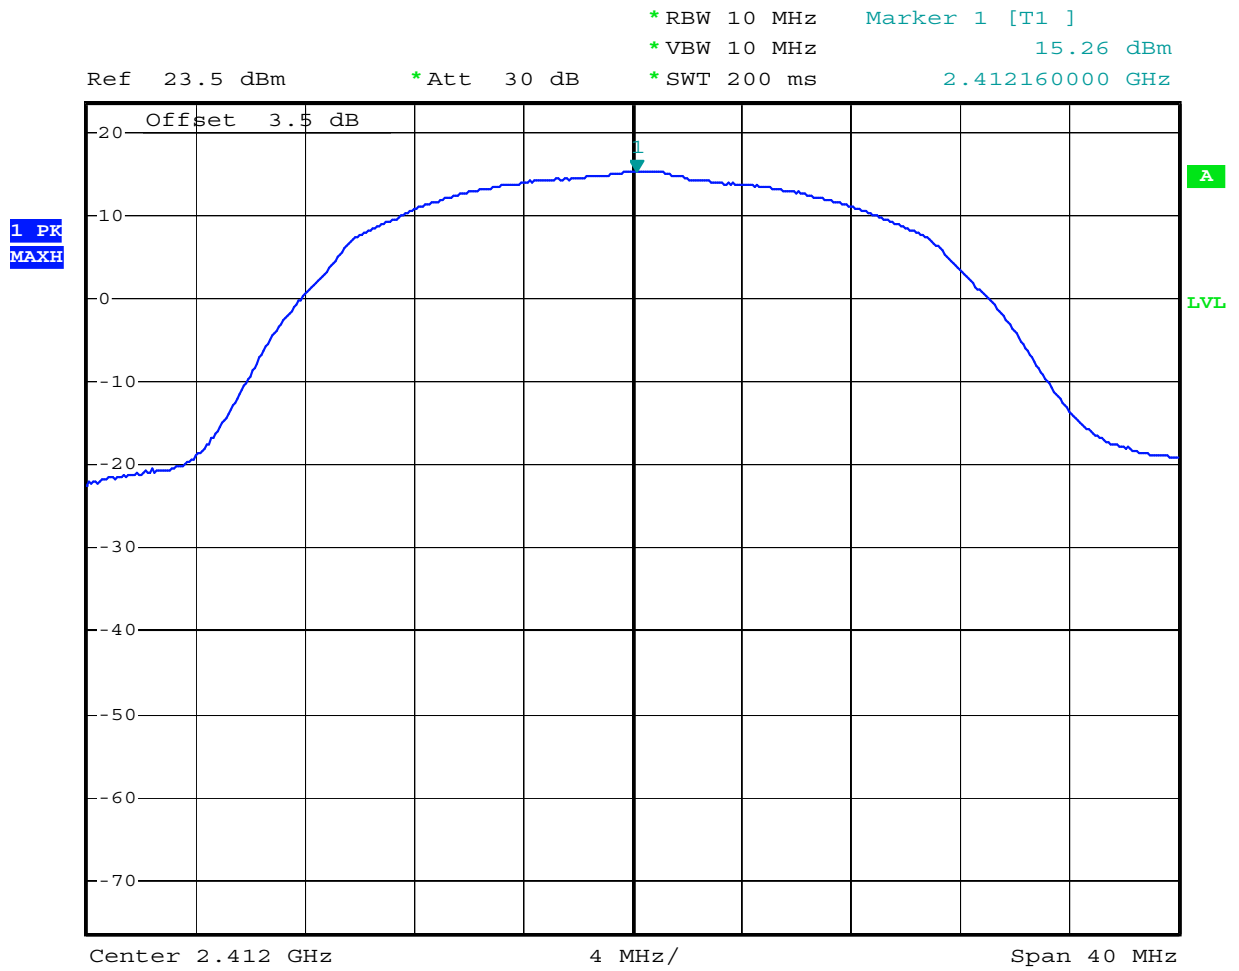


MAX OUTPUT POWER 802.11b CH1

Date: 29.JUN.2006 14:27:21

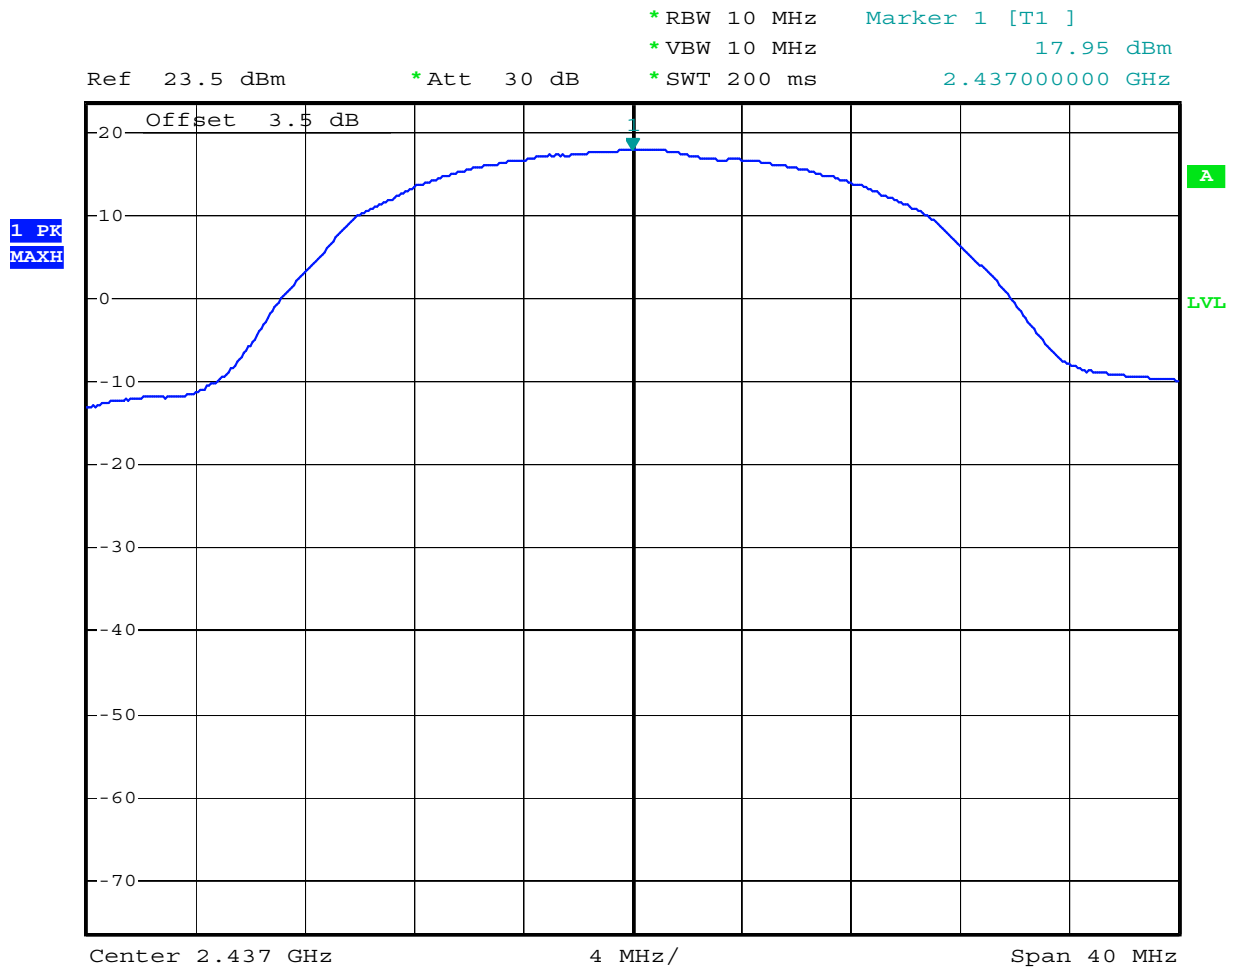

MAX OUTPUT POWER 802.11b CH6

Date: 29.JUN.2006 14:28:18

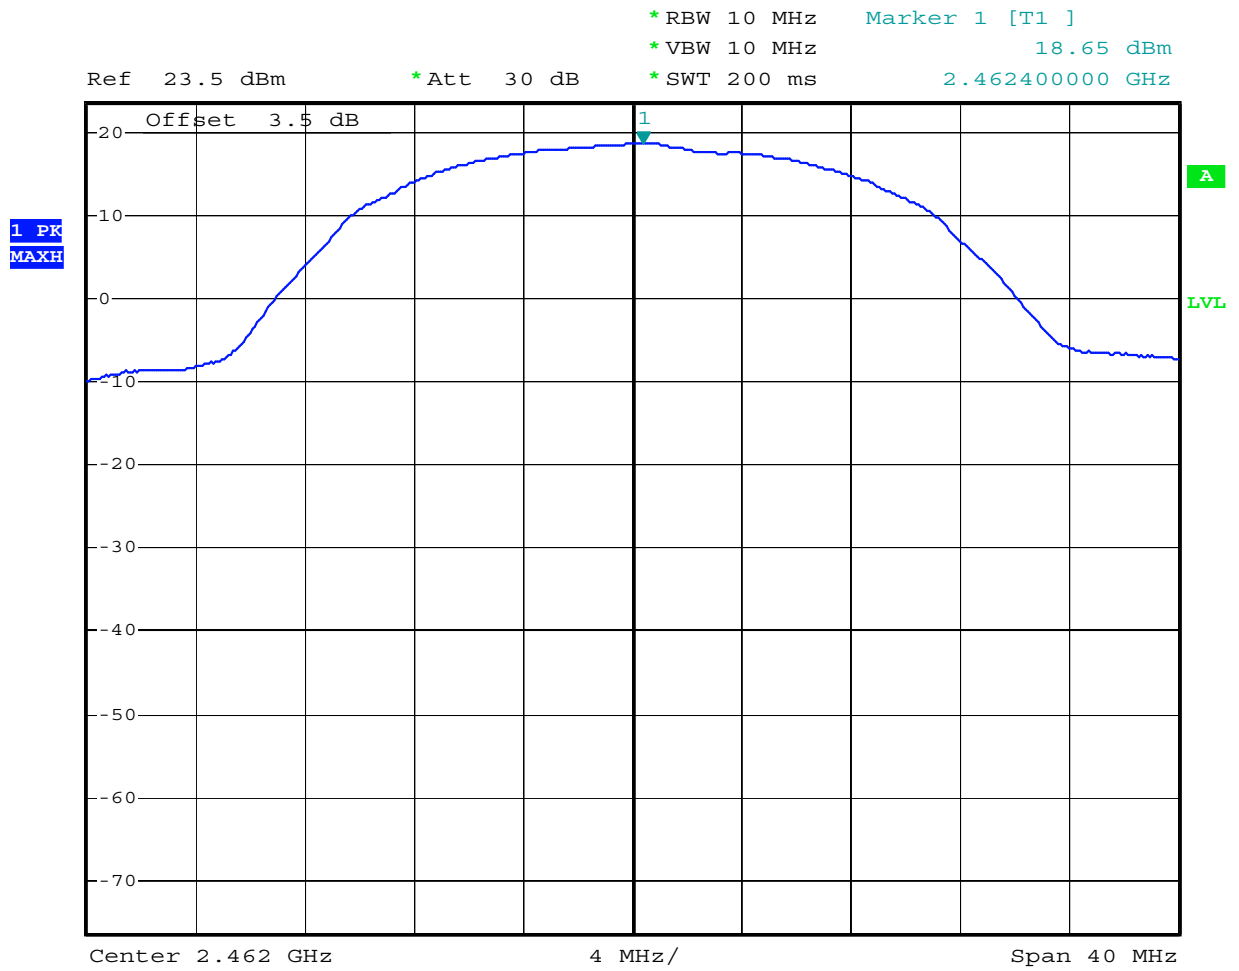


MAX OUTPUT POWER 802.11b CH11

Date: 29.JUN.2006 14:30:18

**Carrier power (Field Strength)**

**FCC RULES PART 15, SUBPART C / LP0002**


Order Number : W6M20606-7087 802.11b ch1  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Freq: 2.413GHz, Emax: 96.45dBµV/m, RBW: 1MHz

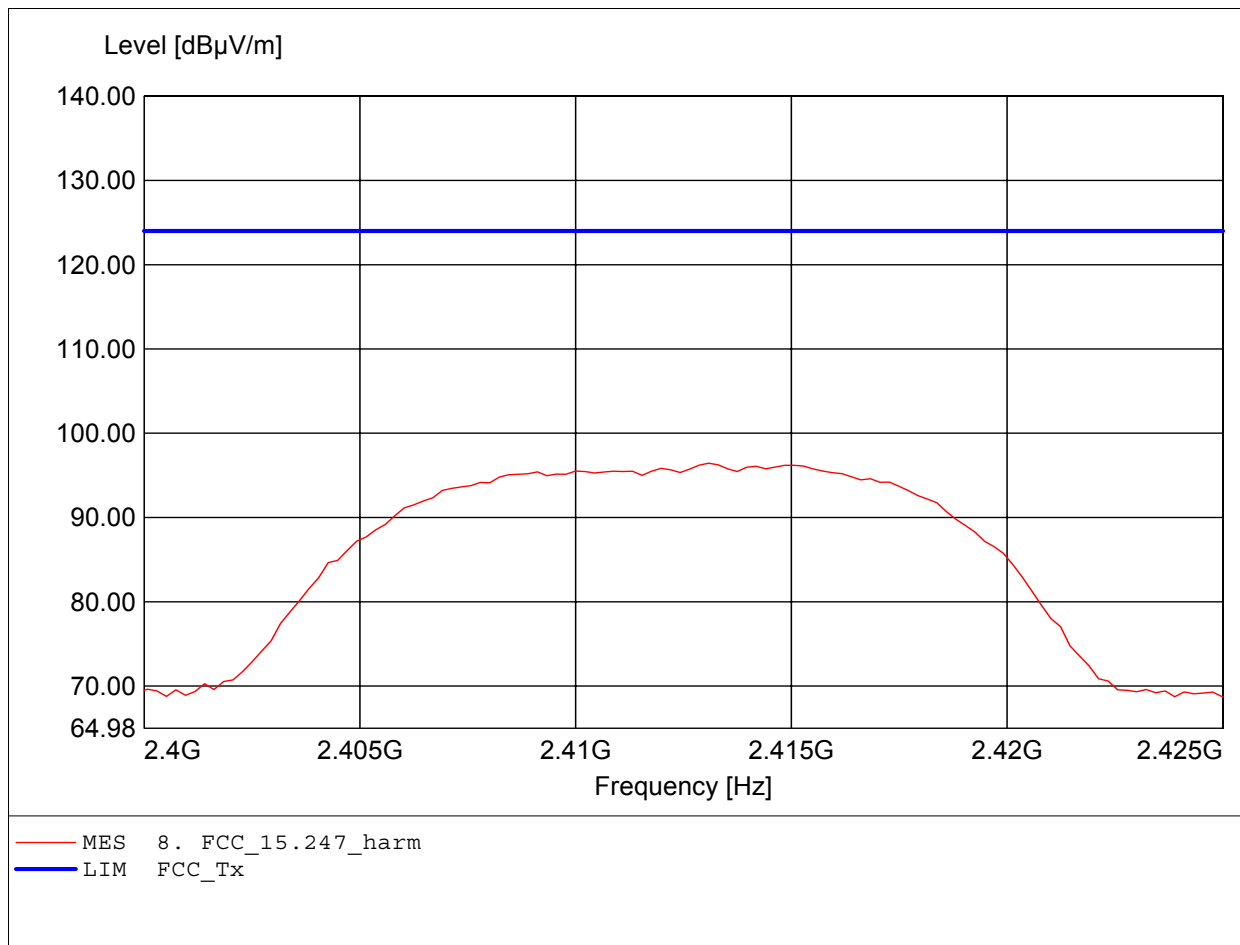

**Carrier power (Field Strength)**

**FCC RULES PART 15, SUBPART C / LP0002**

Order Number : W6M20606-7087 802.11b ch1  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Freq: 2.413GHz, Emax: 94.71dBµV/m, RBW: 1MHz

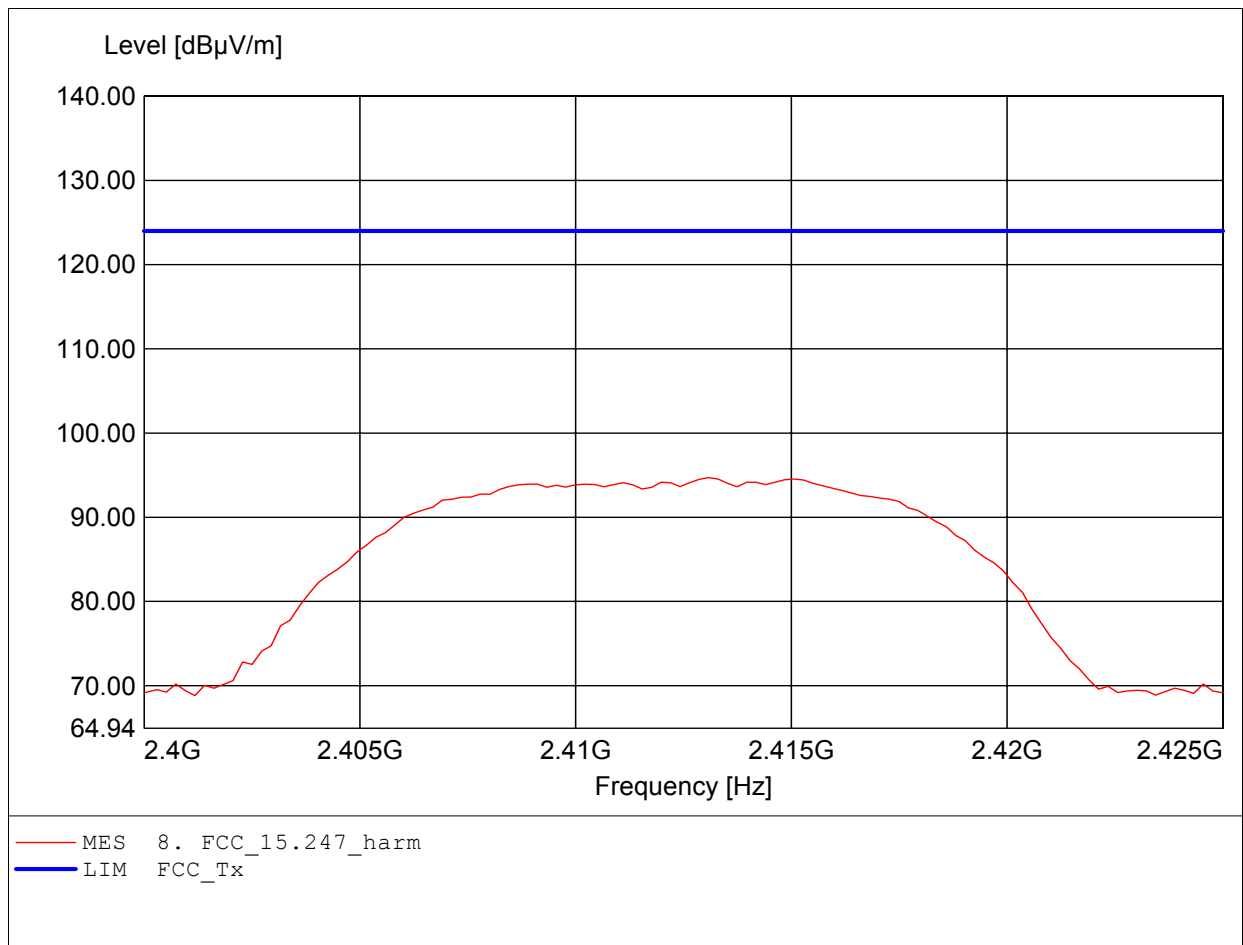




**Carrier power (Field Strength)**

**FCC RULES PART 15, SUBPART C / LP0002**


Order Number : W6M20606-7087 802.11b ch6  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Freq: 2.438GHz, Emax: 100.40dBµV/m, RBW: 1MHz

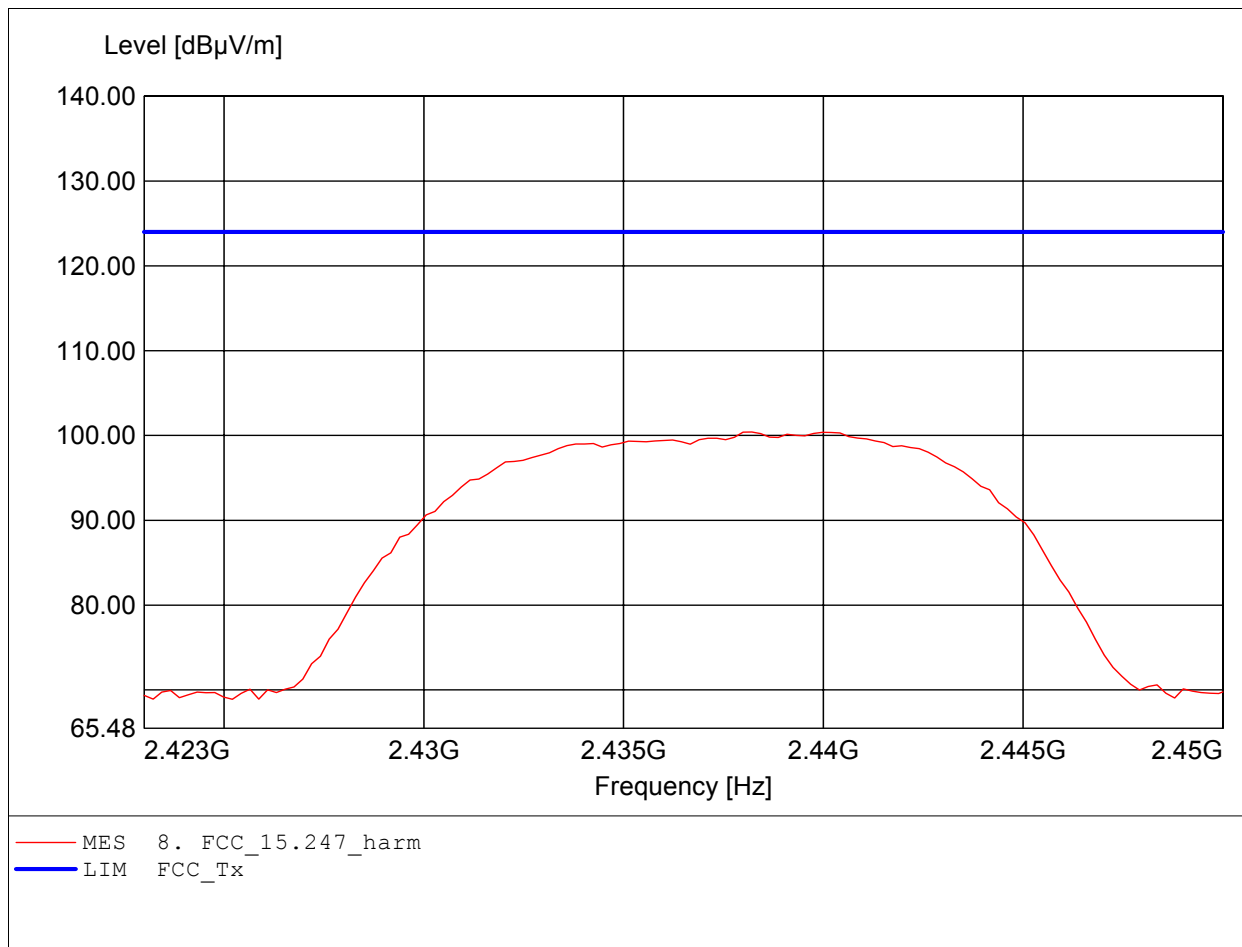

**Carrier power (Field Strength)**

**FCC RULES PART 15, SUBPART C / LP0002**


Order Number : W6M20606-7087 802.11b ch6  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Freq: 2.438GHz, Emax: 94.19dBµV/m, RBW: 1MHz

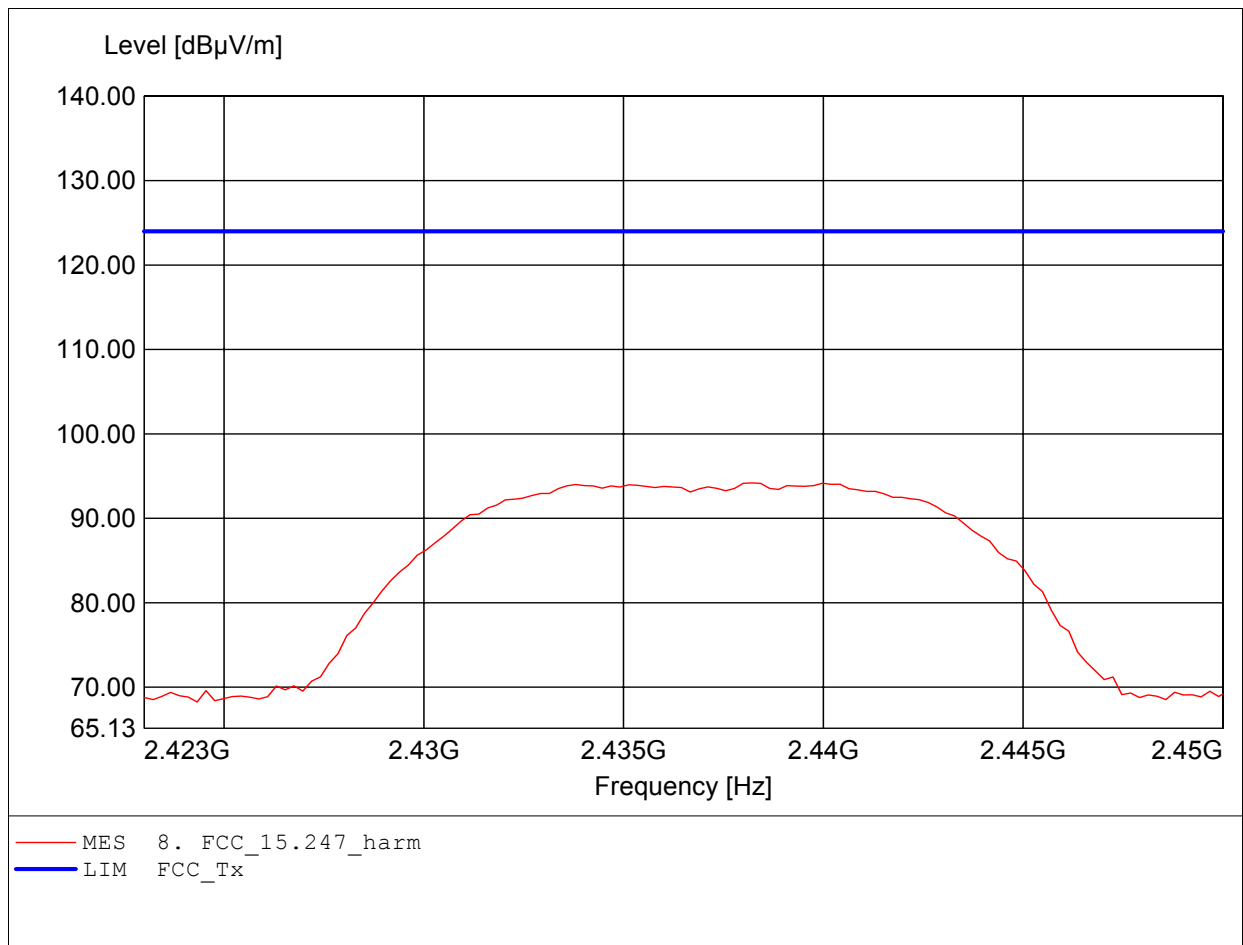

**Carrier power (Field Strength)**

**FCC RULES PART 15, SUBPART C / LP0002**


Order Number : W6M20606-7087 802.11b ch11  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Freq: 2.463GHz, Emax: 102.98dBµV/m, RBW: 1MHz

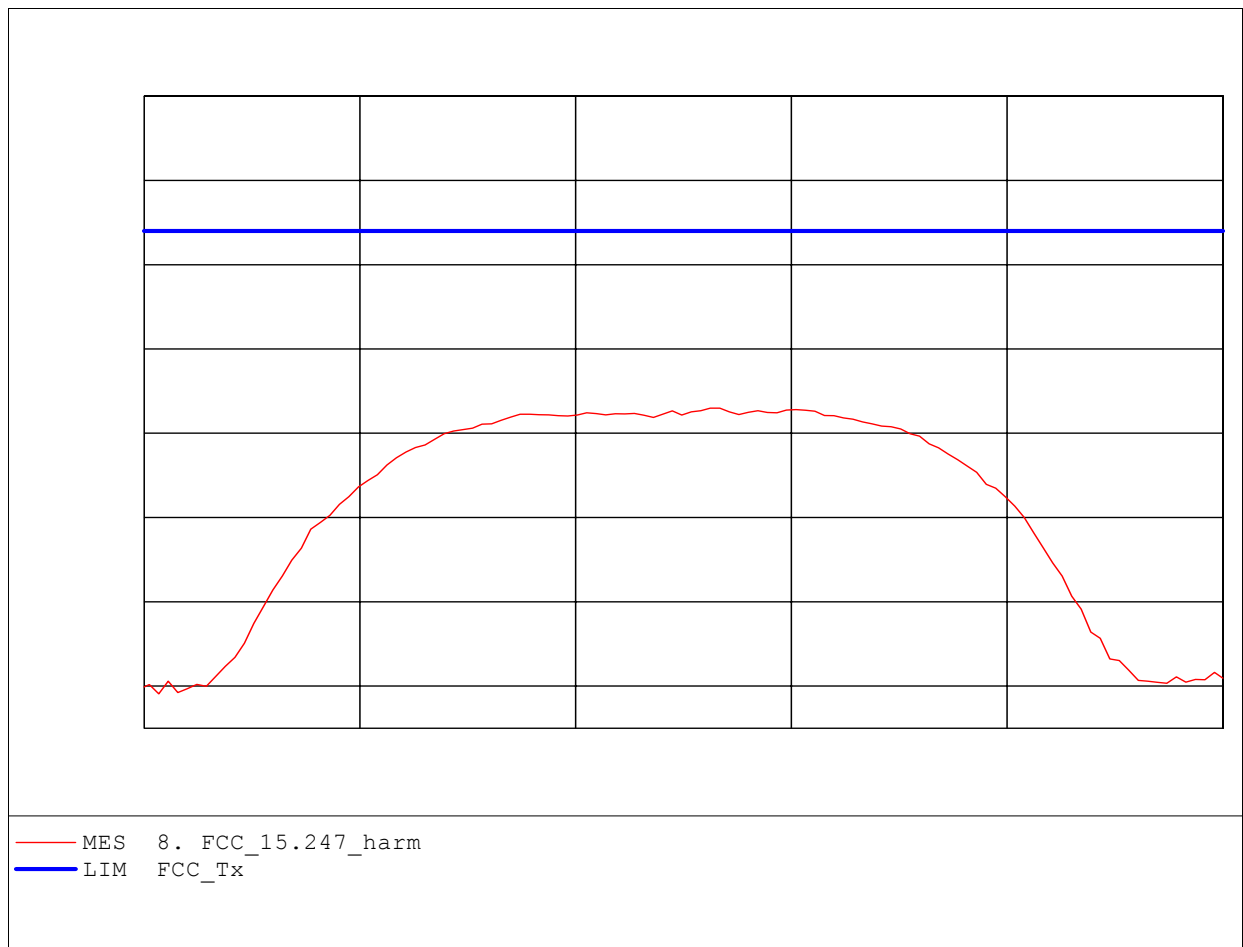

**Carrier power (Field Strength)**

**FCC RULES PART 15, SUBPART C / LP0002**

Order Number : W6M20606-7087 802.11b ch11  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL025  
Freq: 2.463GHz, Emax: 97.11dBµV/m, RBW: 1MHz

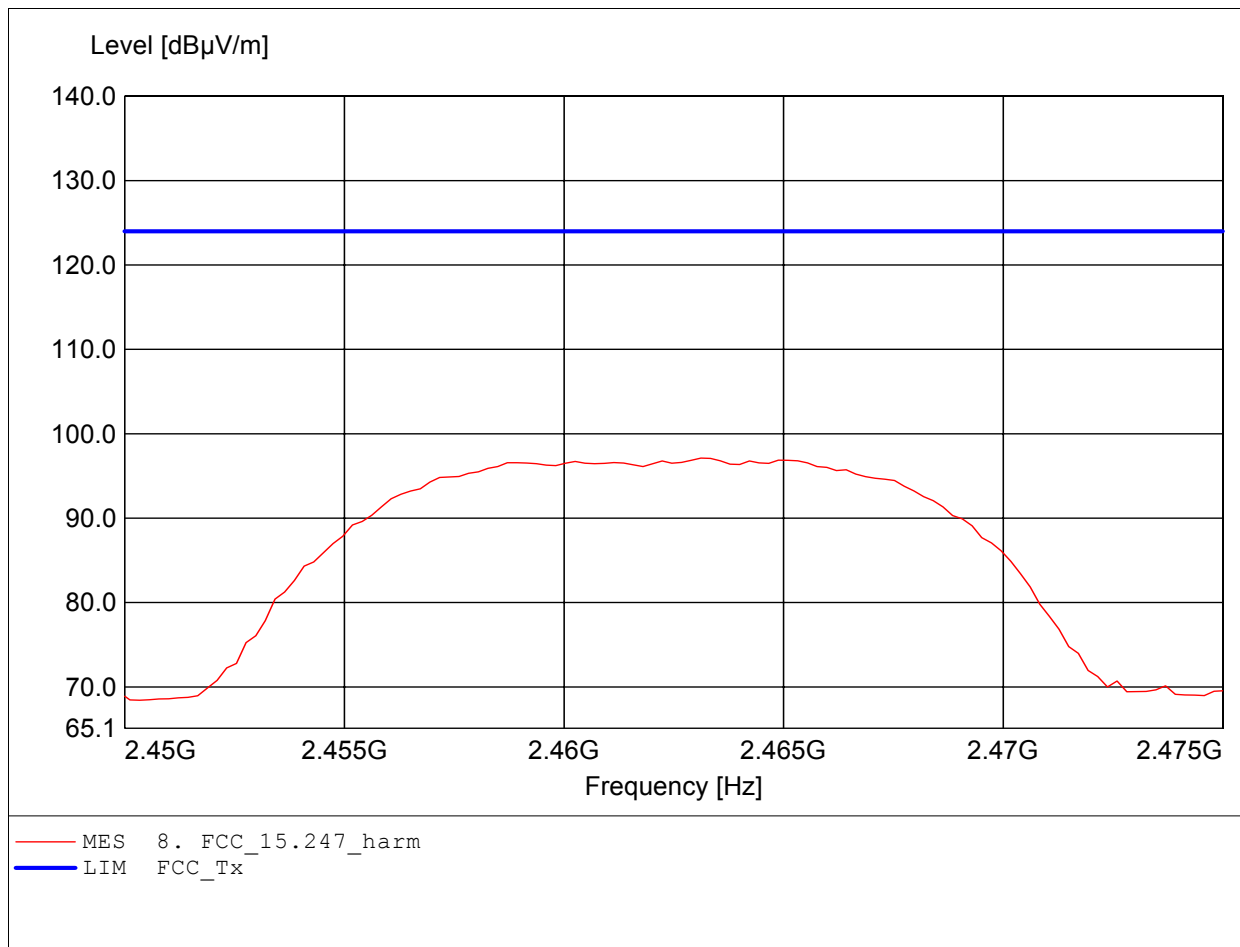



Registration number: W6M20606-7087-C-1  
FCC ID: RXZ-WU61RL

## **Appendix B**


Spurious Emissions radiated

**The measurement diagram are wideband pre-scan results; only for reference.**

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C / LP0002


Order Number : W6M20606-7087 802.11b ch1  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 2.400GHz, Emax: 59.35dBµV/m, RBW: 1MHz

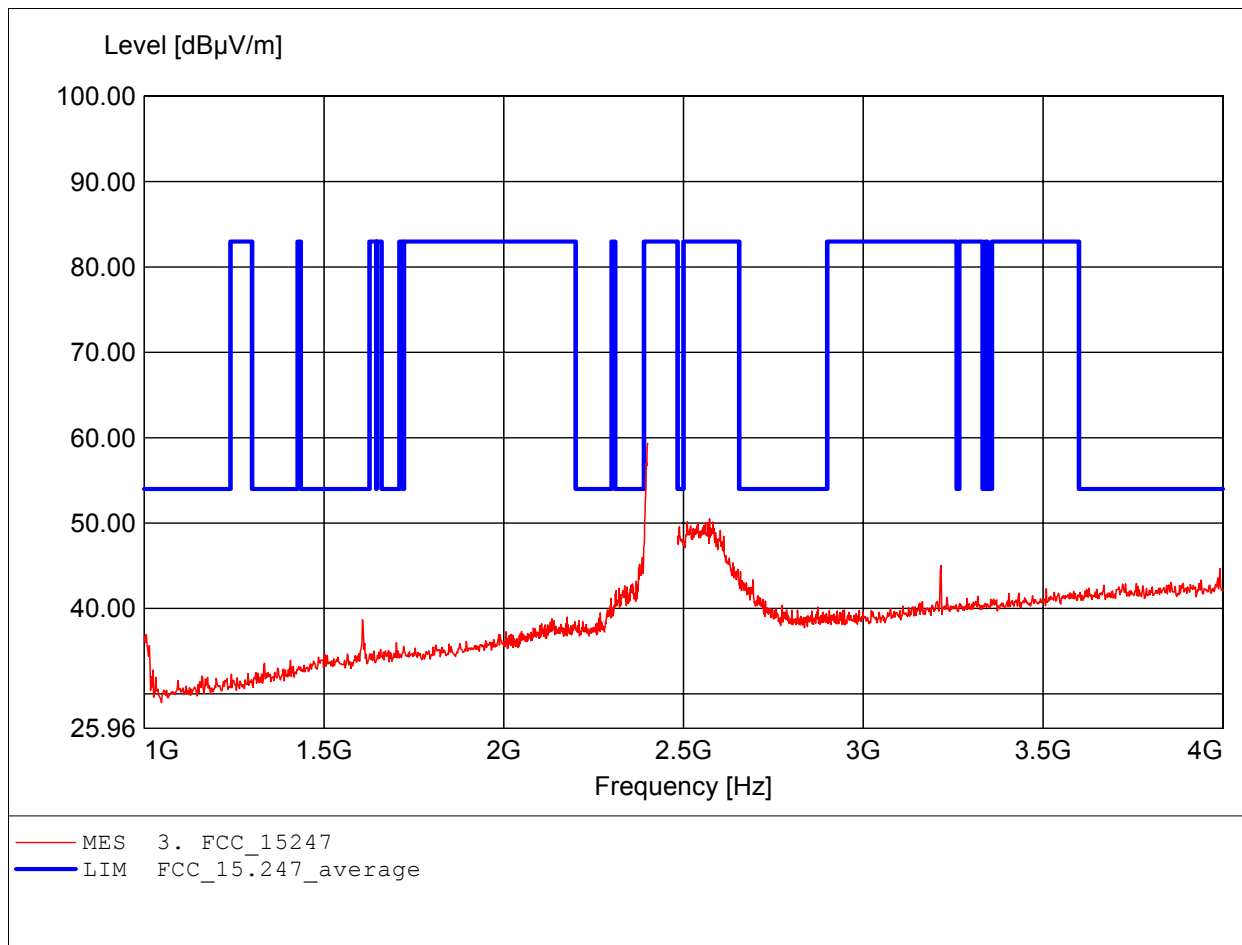

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C / LP0002


Order Number : W6M20606-7087 802.11b ch1  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 2.400GHz, Emax: 53.35dBµV/m, RBW: 1MHz

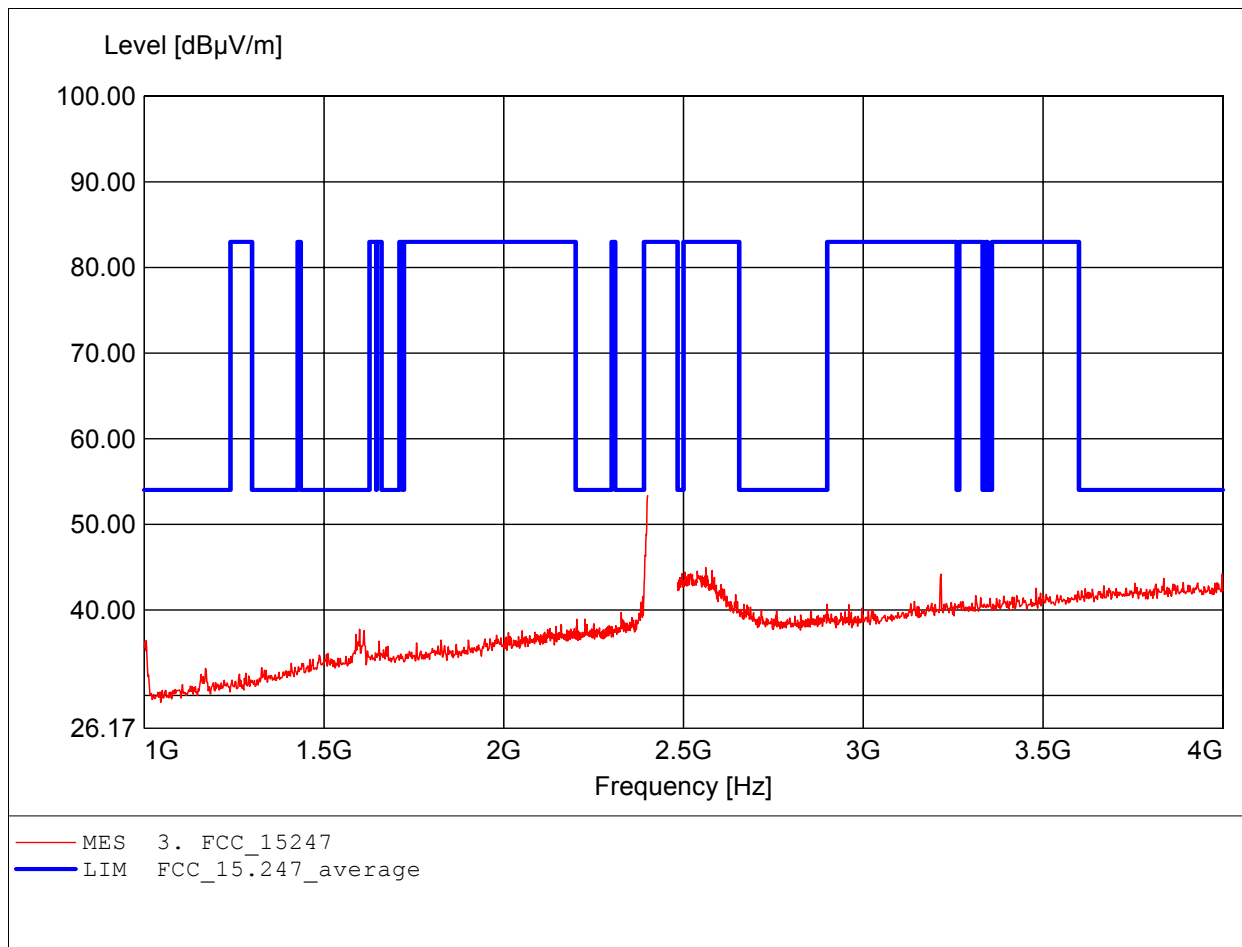

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C / LP0002

Order Number : W6M20606-7087 802.11b ch1  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 6.437GHz, Emax: 52.90dBµV/m, RBW: 1MHz

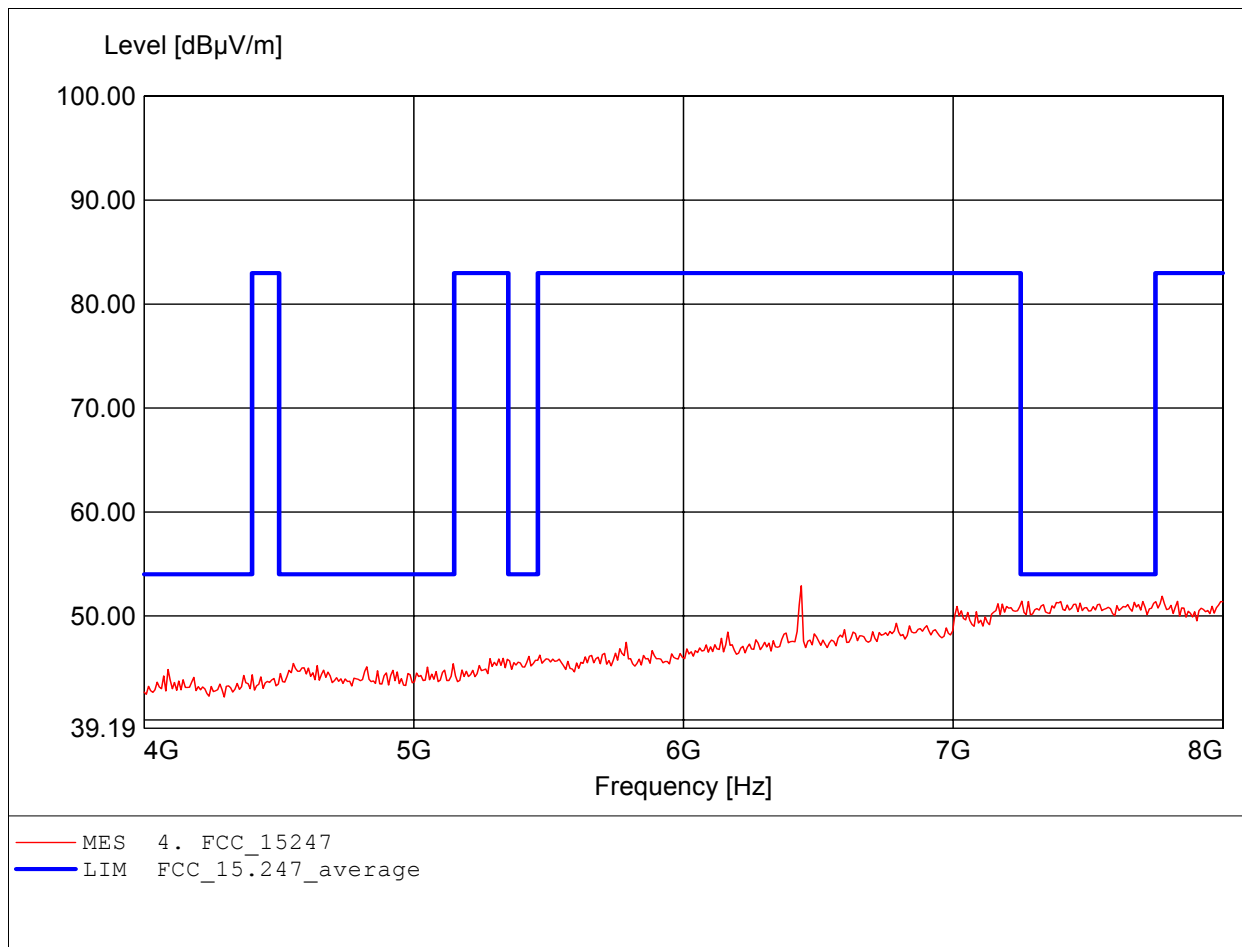




**Spurious emissions Field Strength**

**FCC RULES PART 15, SUBPART C / LP0002**


Order Number : W6M20606-7087 802.11b ch1  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 6.437GHz, Emax: 53.68dBµV/m, RBW: 1MHz

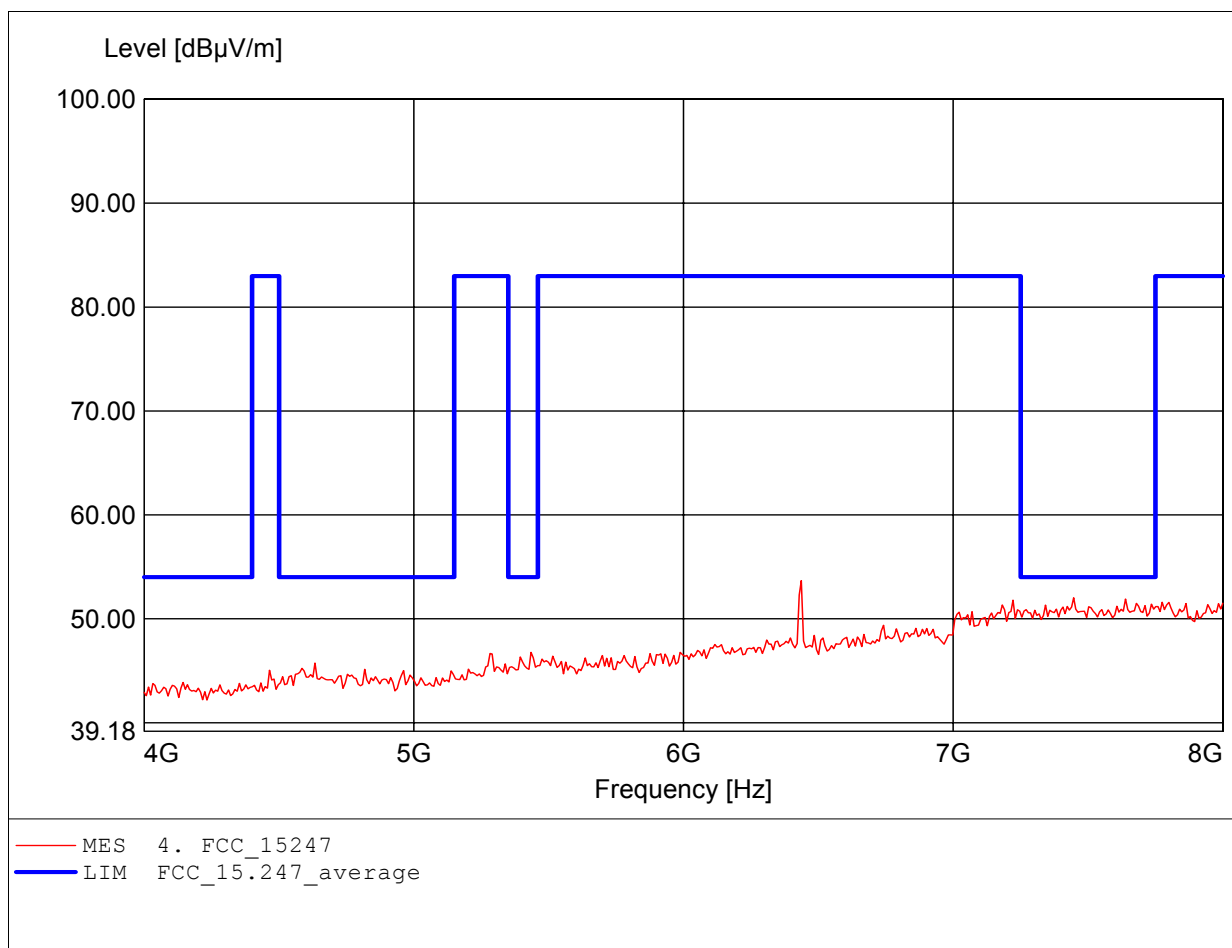

**Spurious emissions Field Strength**

**FCC RULES PART 15, SUBPART C / LP0002**


Order Number : W6M20606-7087 802.11b ch1  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 11.631GHz, Emax: 48.61dBμV/m, RBW: 1MHz

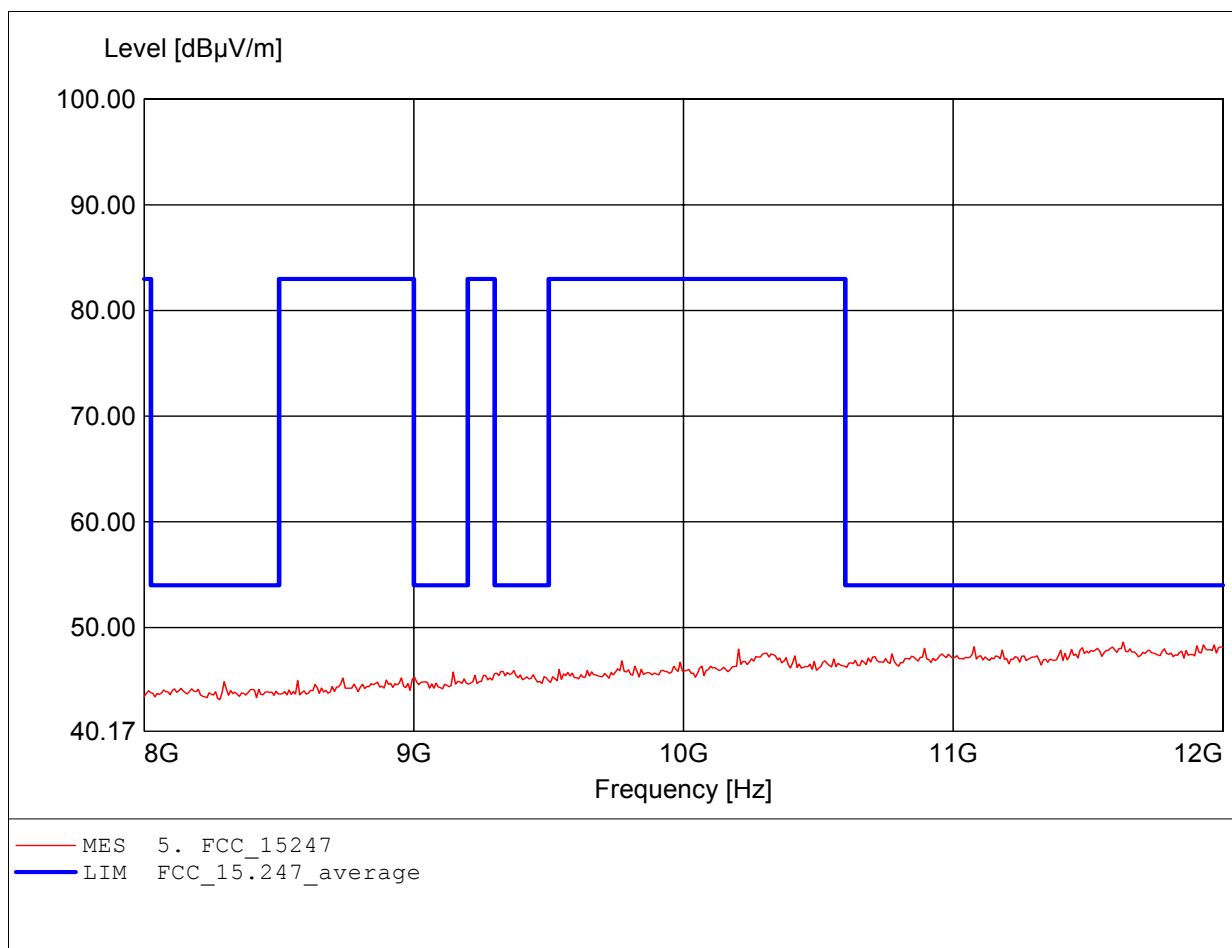

**Spurious emissions Field Strength**

**FCC RULES PART 15, SUBPART C / LP0002**


Order Number : W6M20606-7087 802.11b ch1  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 11.952GHz, Emax: 48.70dBµV/m, RBW: 1MHz

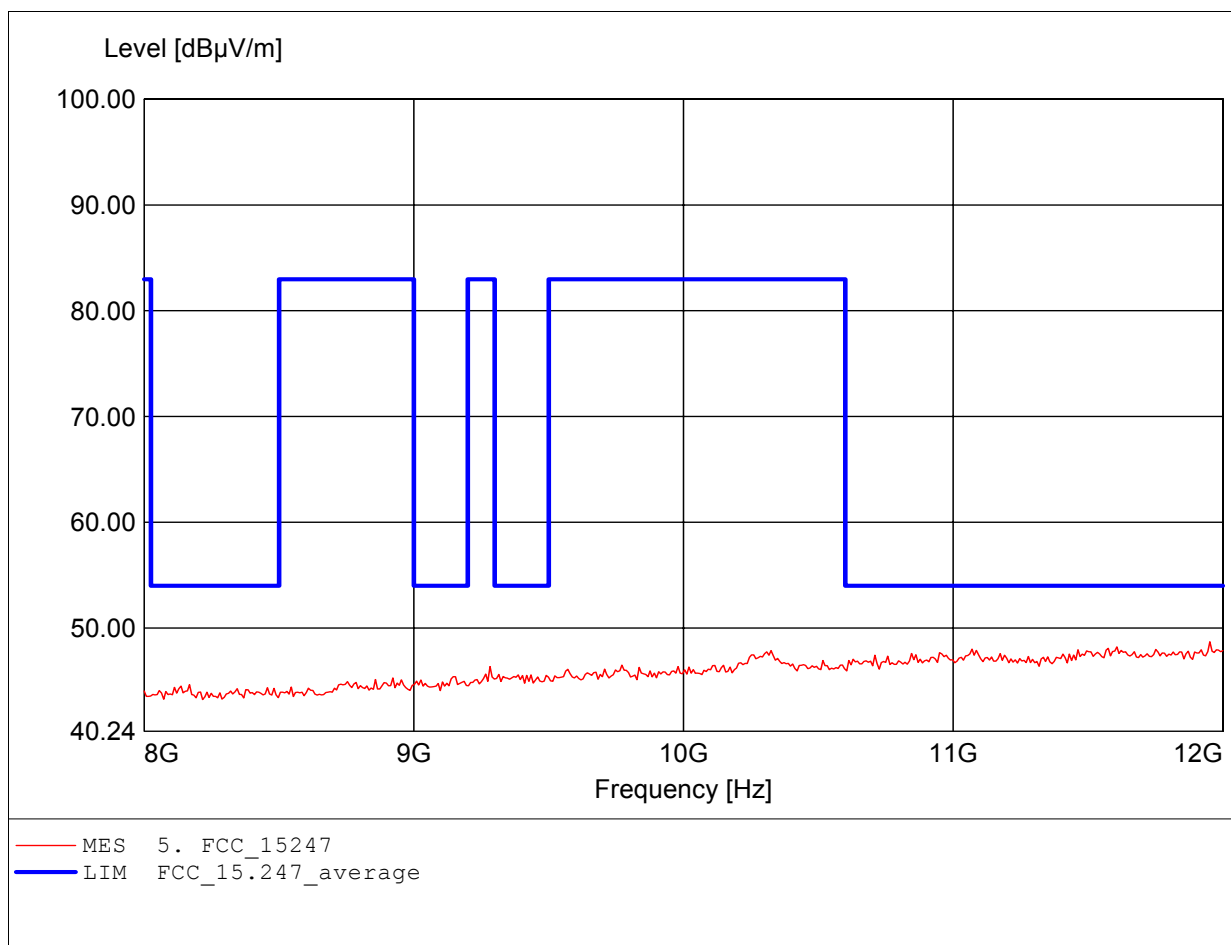

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C / LP0002


Order Number : W6M20606-7087 802.11b ch1  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 17.916GHz, Emax: 52.65dBµV/m, RBW: 1MHz

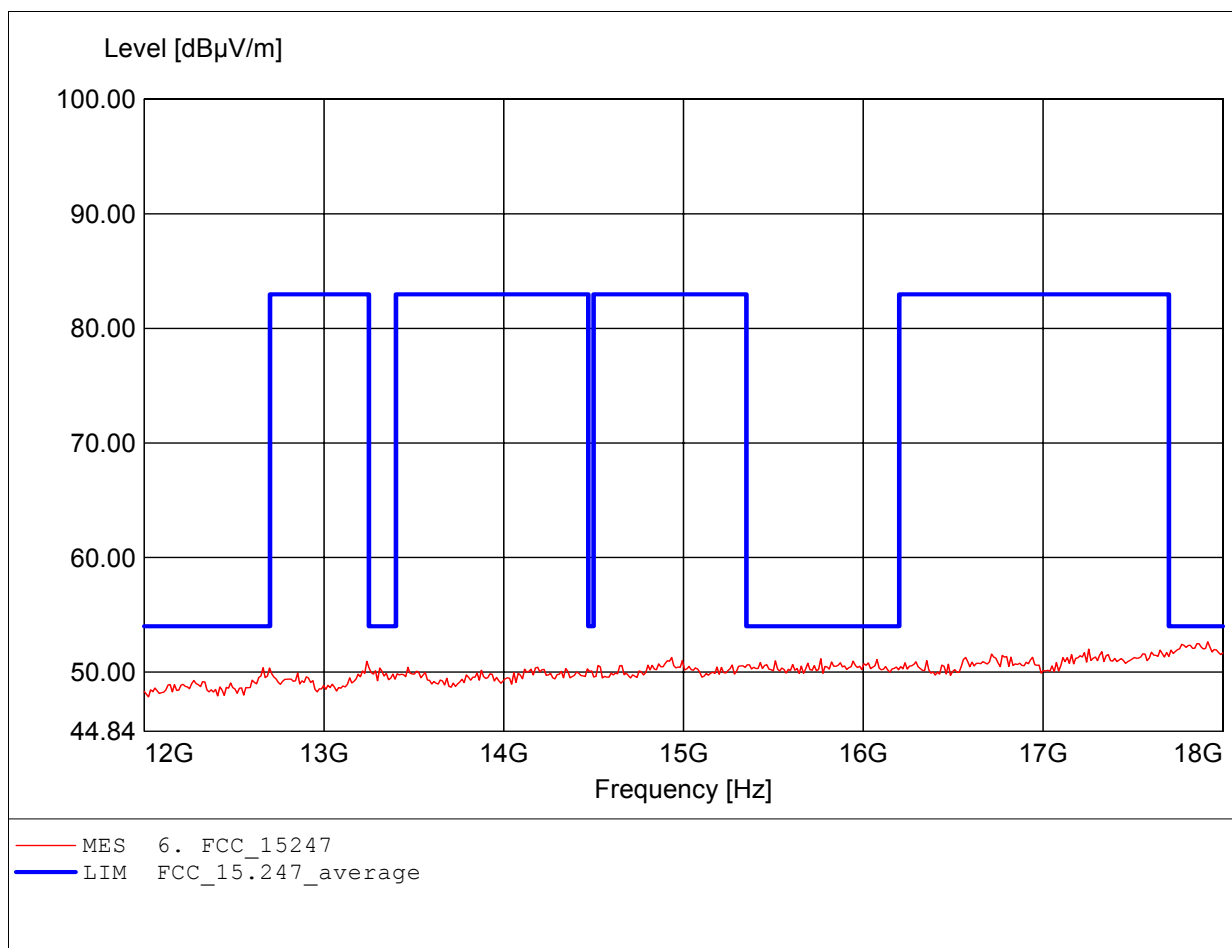

**Spurious emissions Field Strength**

**FCC RULES PART 15, SUBPART C / LP0002**


Order Number : W6M20606-7087 802.11b ch1  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 17.856GHz, Emax: 52.57dBµV/m, RBW: 1MHz

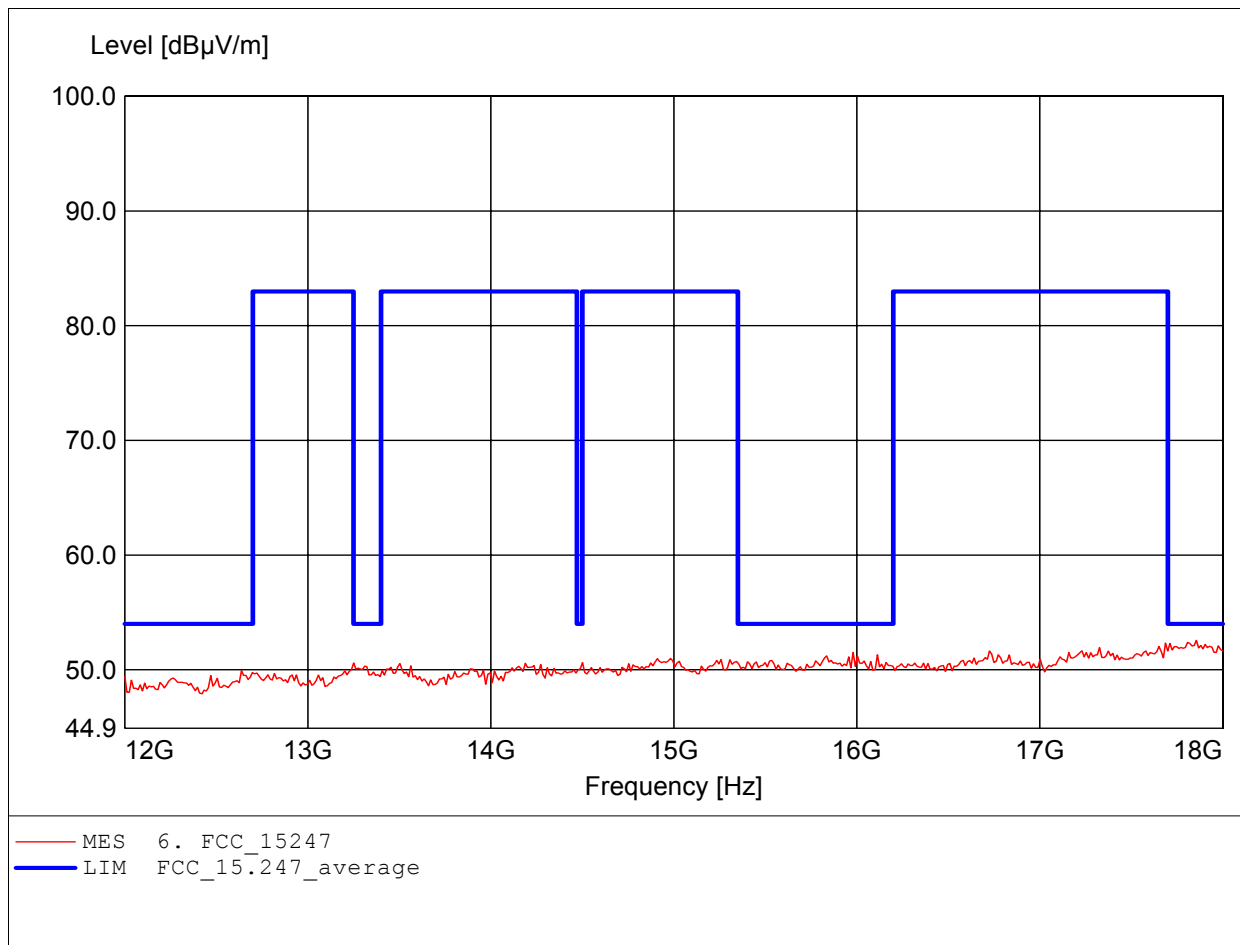

**Spurious emissions Field Strength**

**FCC RULES PART 15, SUBPART C / LP0002**


Order Number : W6M20606-7087 802.11b ch1  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 24.388GHz, Emax: 50.69dBμV/m, RBW: 1MHz

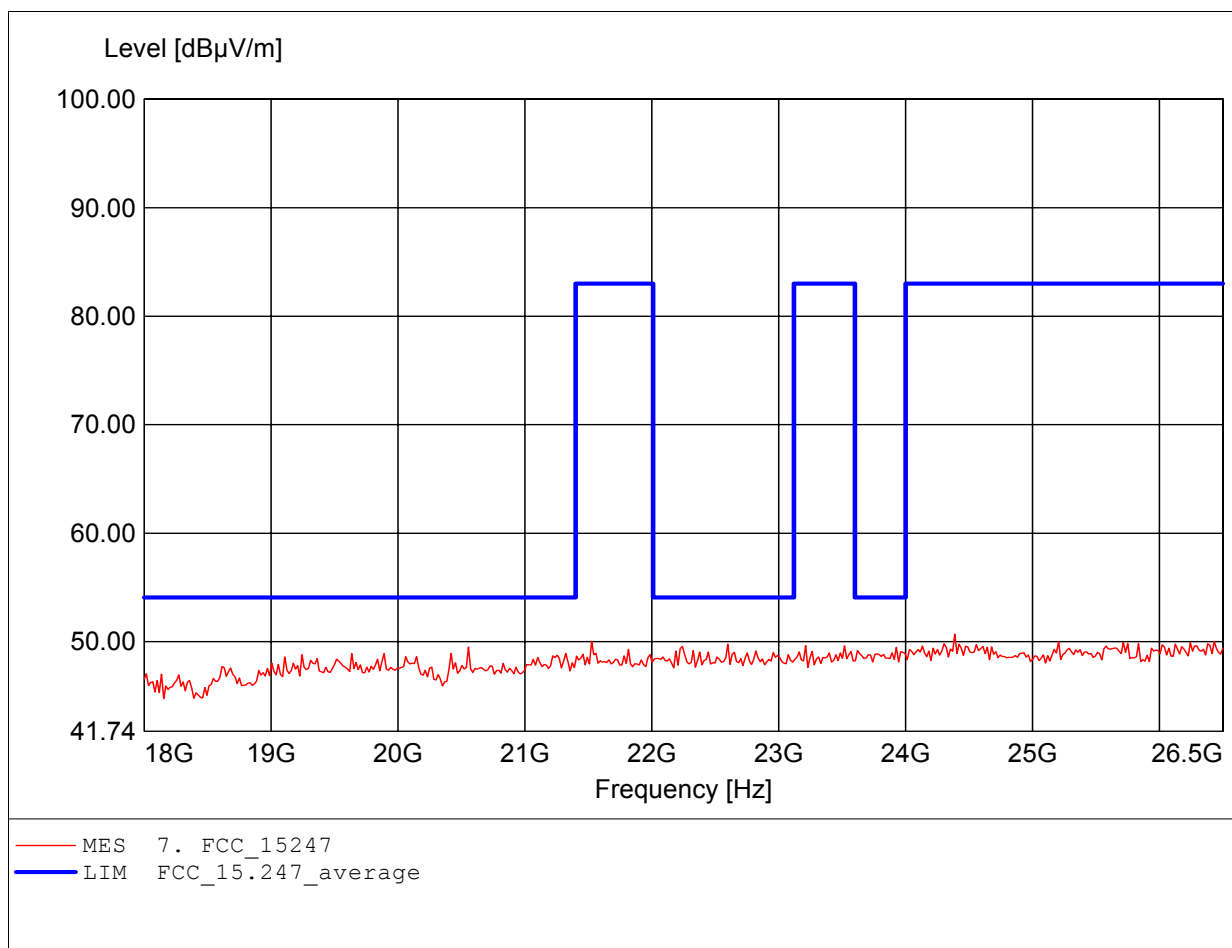

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C / LP0002


Order Number : W6M20606-7087 802.11b ch1  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 26.313GHz, Emax: 50.47dBµV/m, RBW: 1MHz

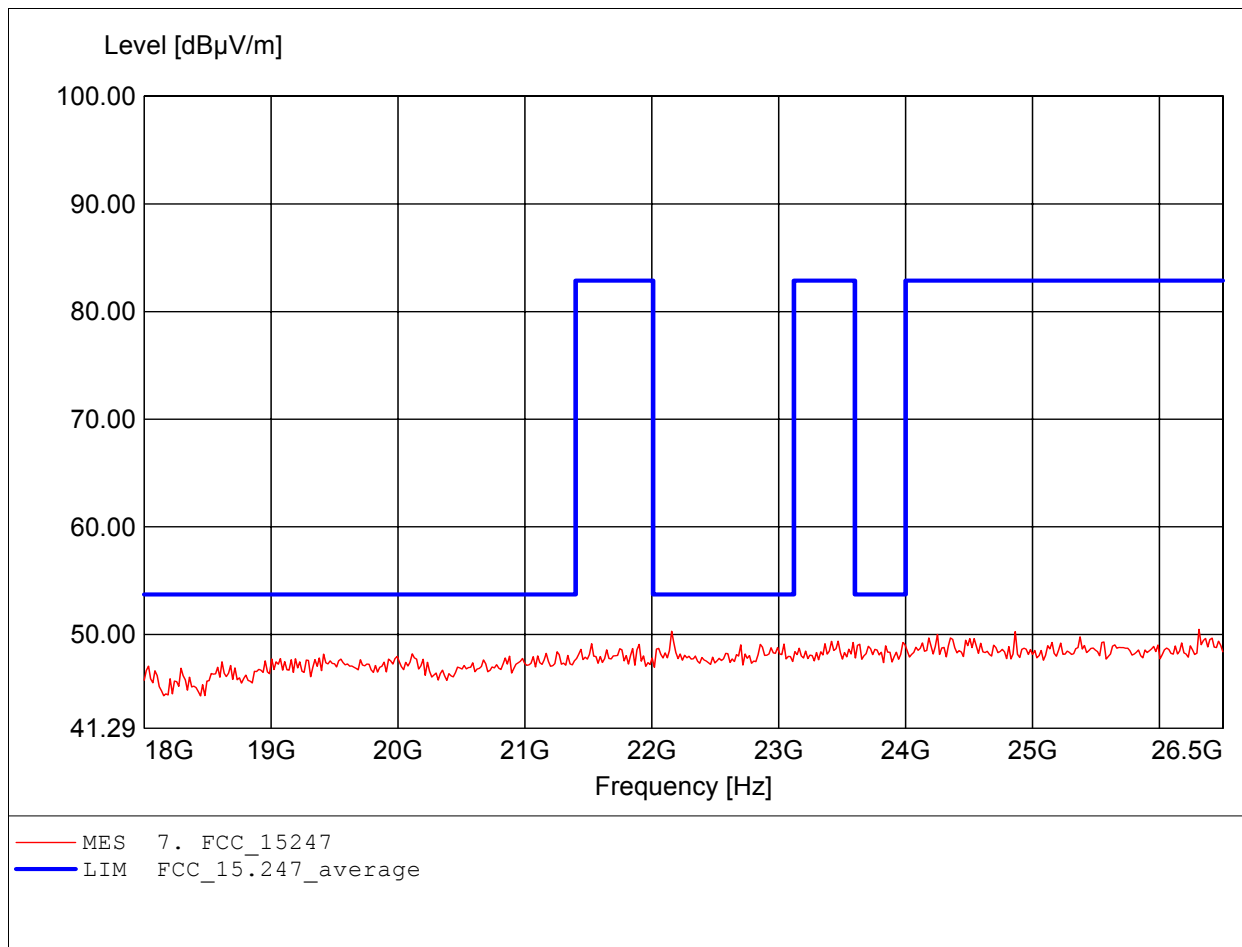

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C / LP0002

Order Number : W6M20606-7087 802.11b ch6  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 2.587GHz, Emax: 50.34dBµV/m, RBW: 1MHz

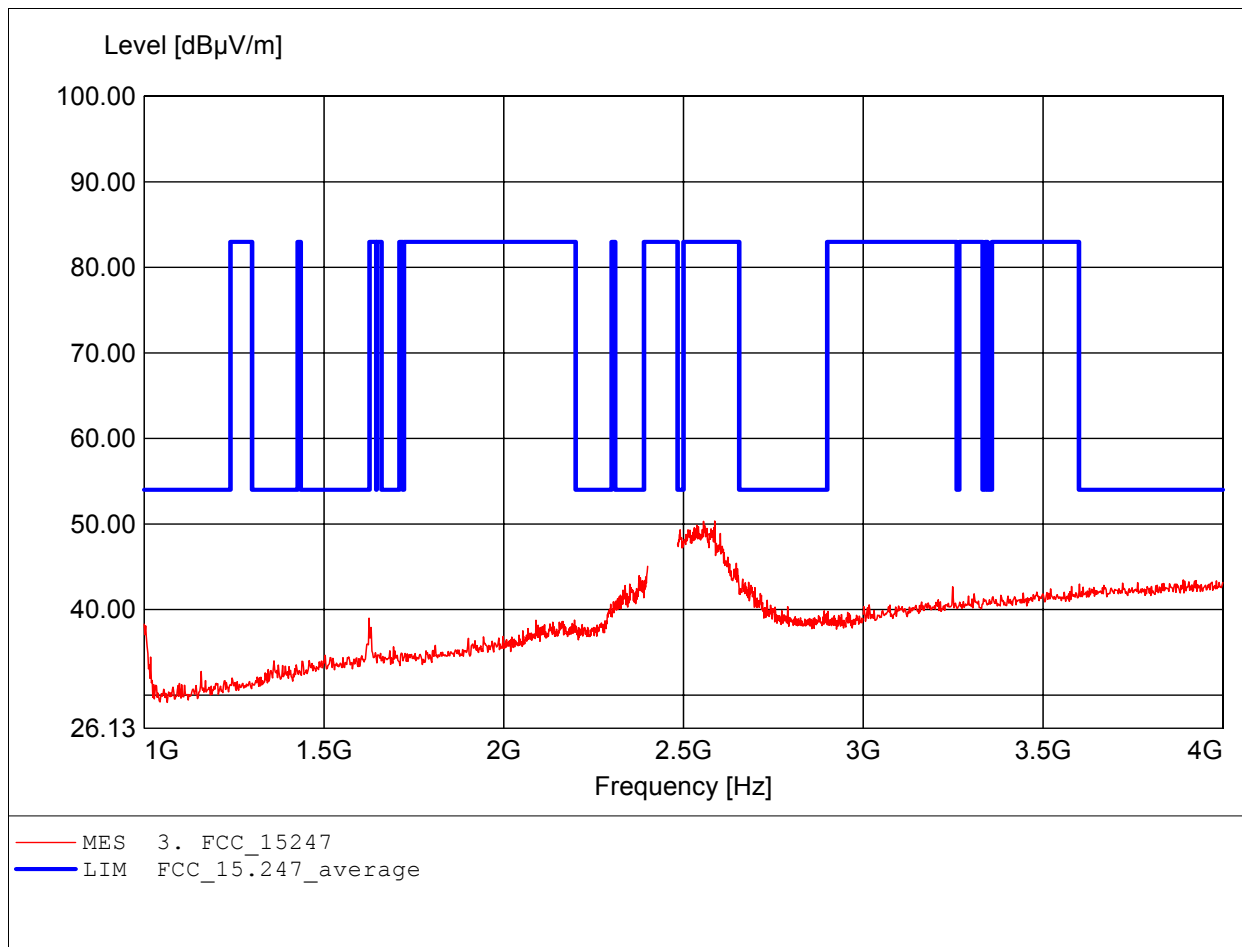




# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C / LP0002


Order Number : W6M20606-7087 802.11b ch6  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 3.691GHz, Emax: 43.96dBµV/m, RBW: 1MHz

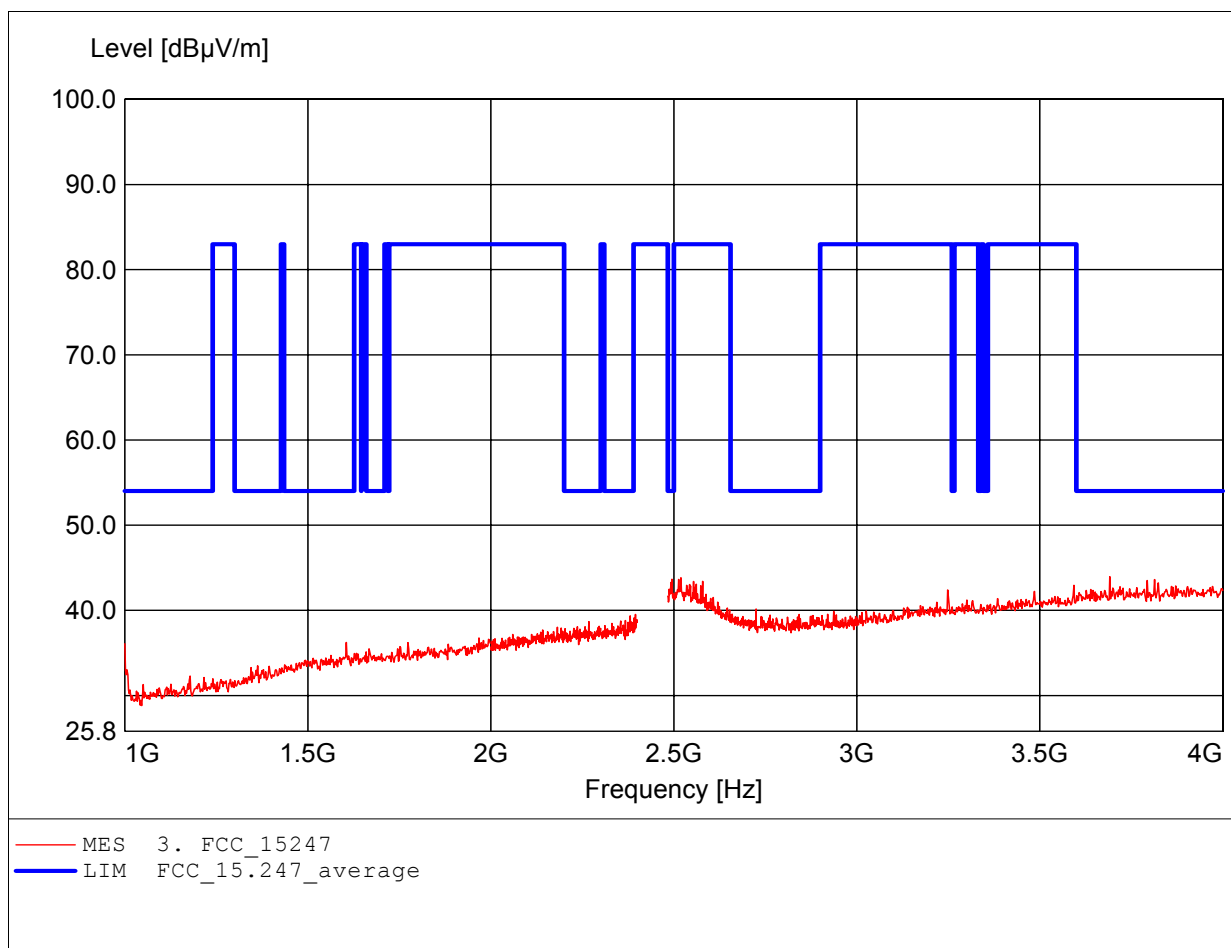

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C / LP0002


Order Number : W6M20606-7087 802.11b ch6  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 6.501GHz, Emax: 53.14dBµV/m, RBW: 1MHz

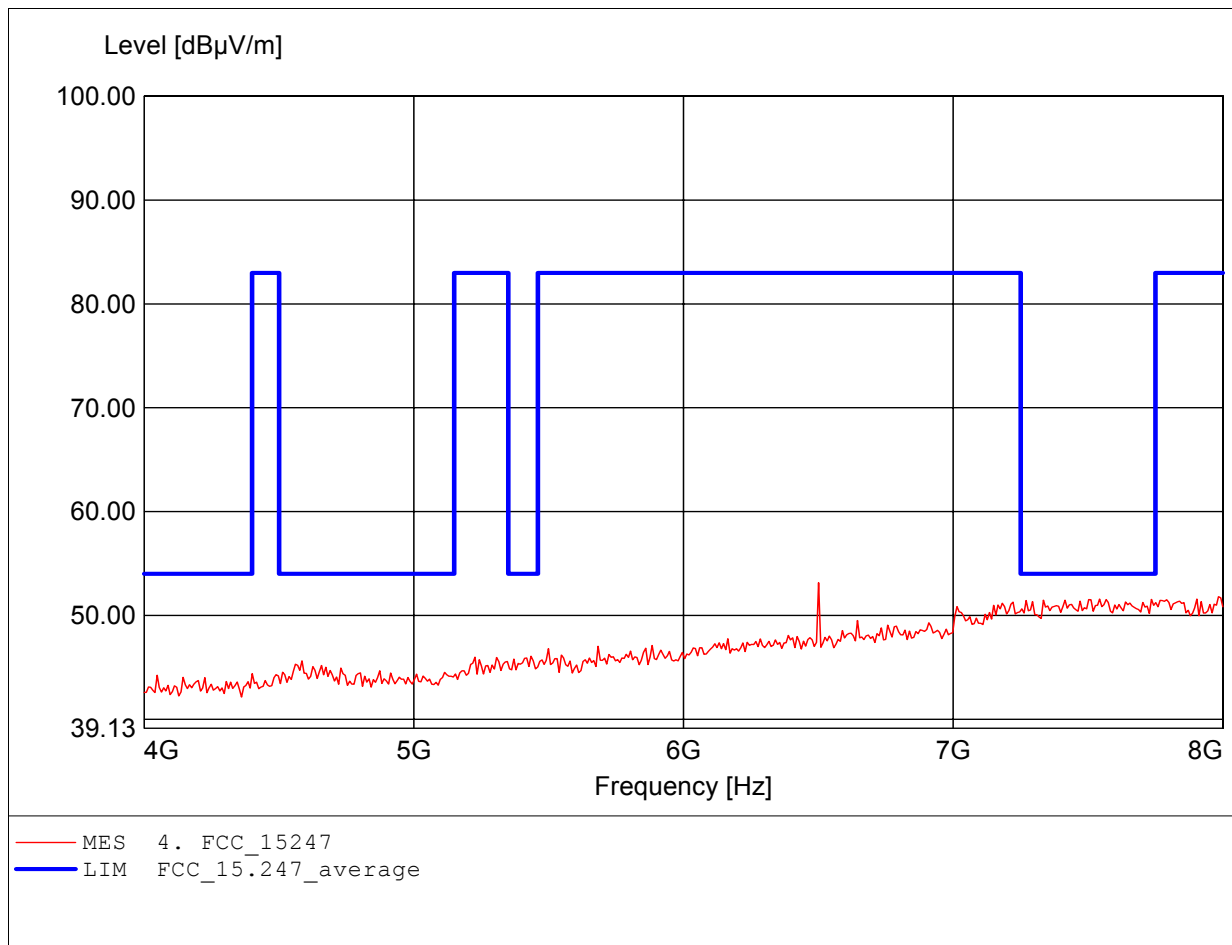

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C / LP0002


Order Number : W6M20606-7087 802.11b ch6  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 6.501GHz, Emax: 53.21dBµV/m, RBW: 1MHz

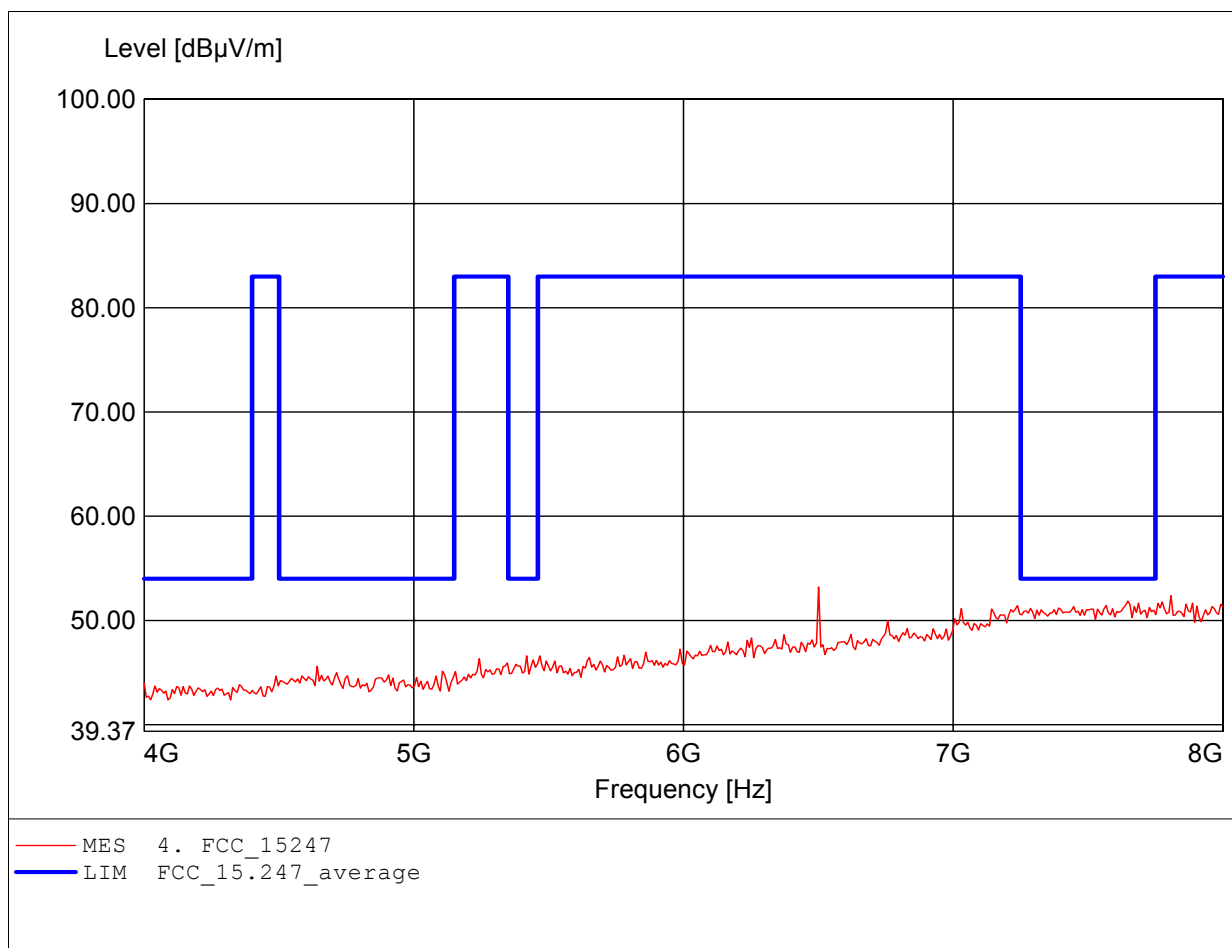

**Spurious emissions Field Strength**

**FCC RULES PART 15, SUBPART C / LP0002**


Order Number : W6M20606-7087 802.11b ch6  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 11.856GHz, Emax: 48.43dBμV/m, RBW: 1MHz

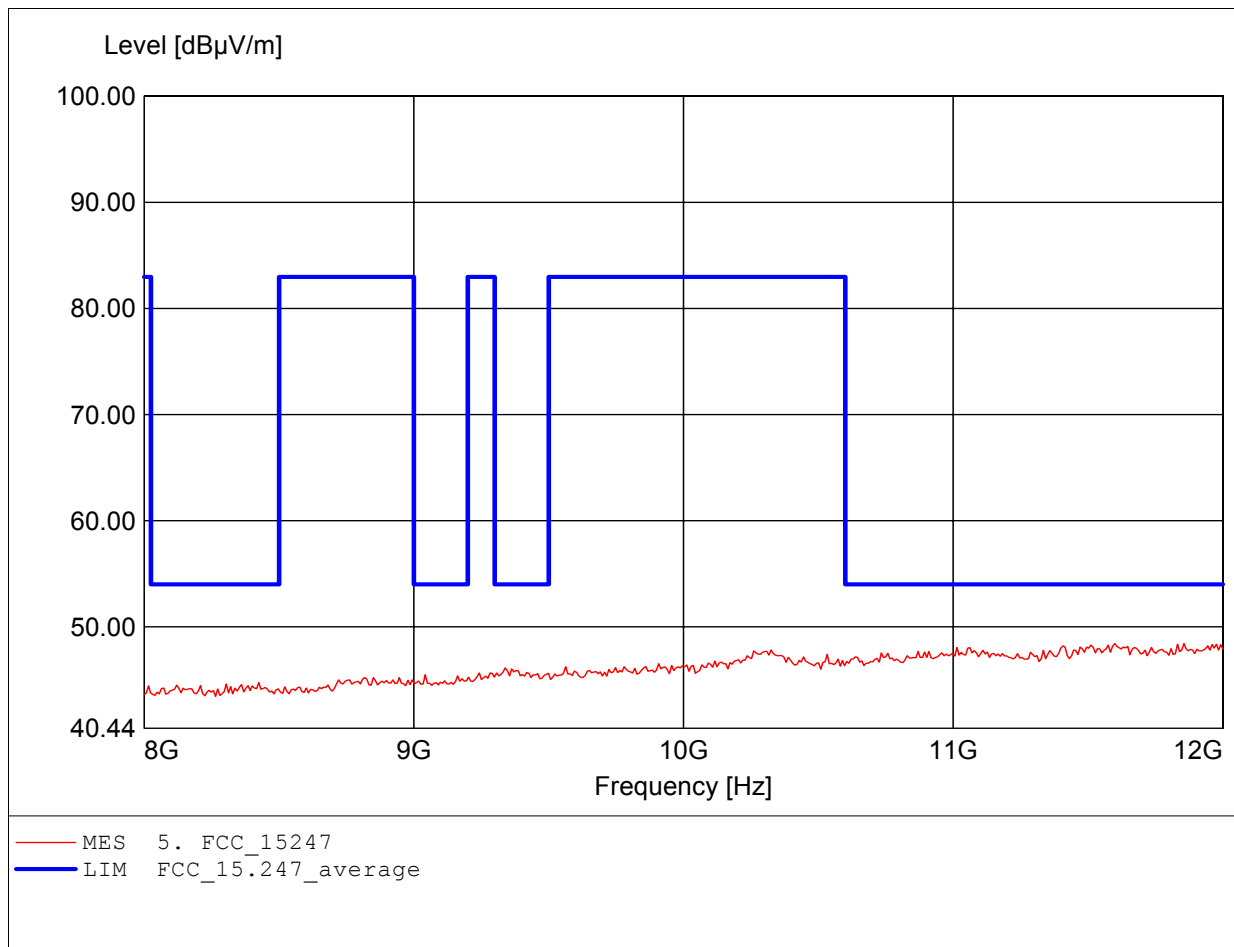

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C / LP0002


Order Number : W6M20606-7087 802.11b ch6  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 10.301GHz, Emax: 48.28dBµV/m, RBW: 1MHz

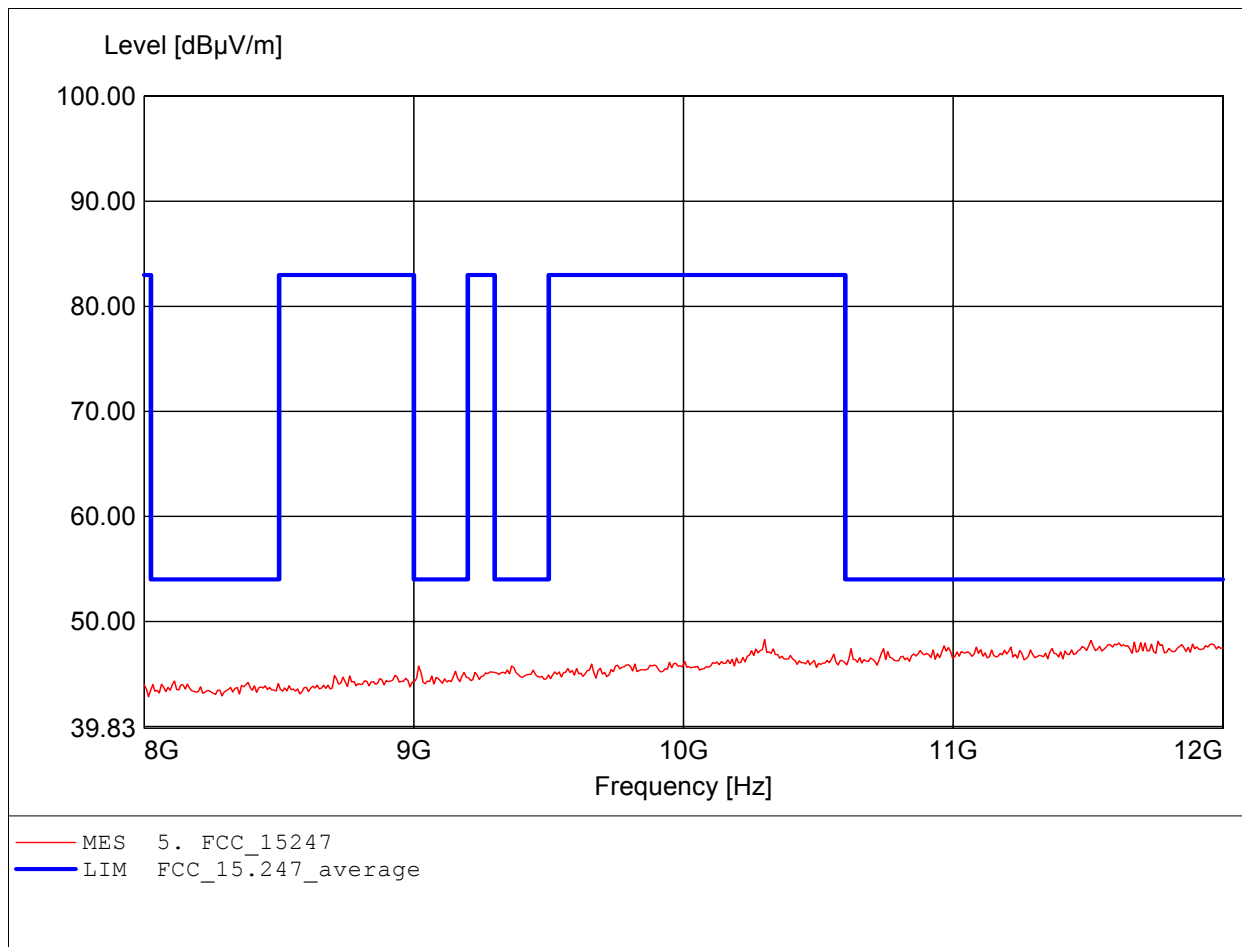

**Spurious emissions Field Strength**

**FCC RULES PART 15, SUBPART C / LP0002**


Order Number : W6M20606-7087 802.11b ch6  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 17.808GHz, Emax: 52.77dBµV/m, RBW: 1MHz

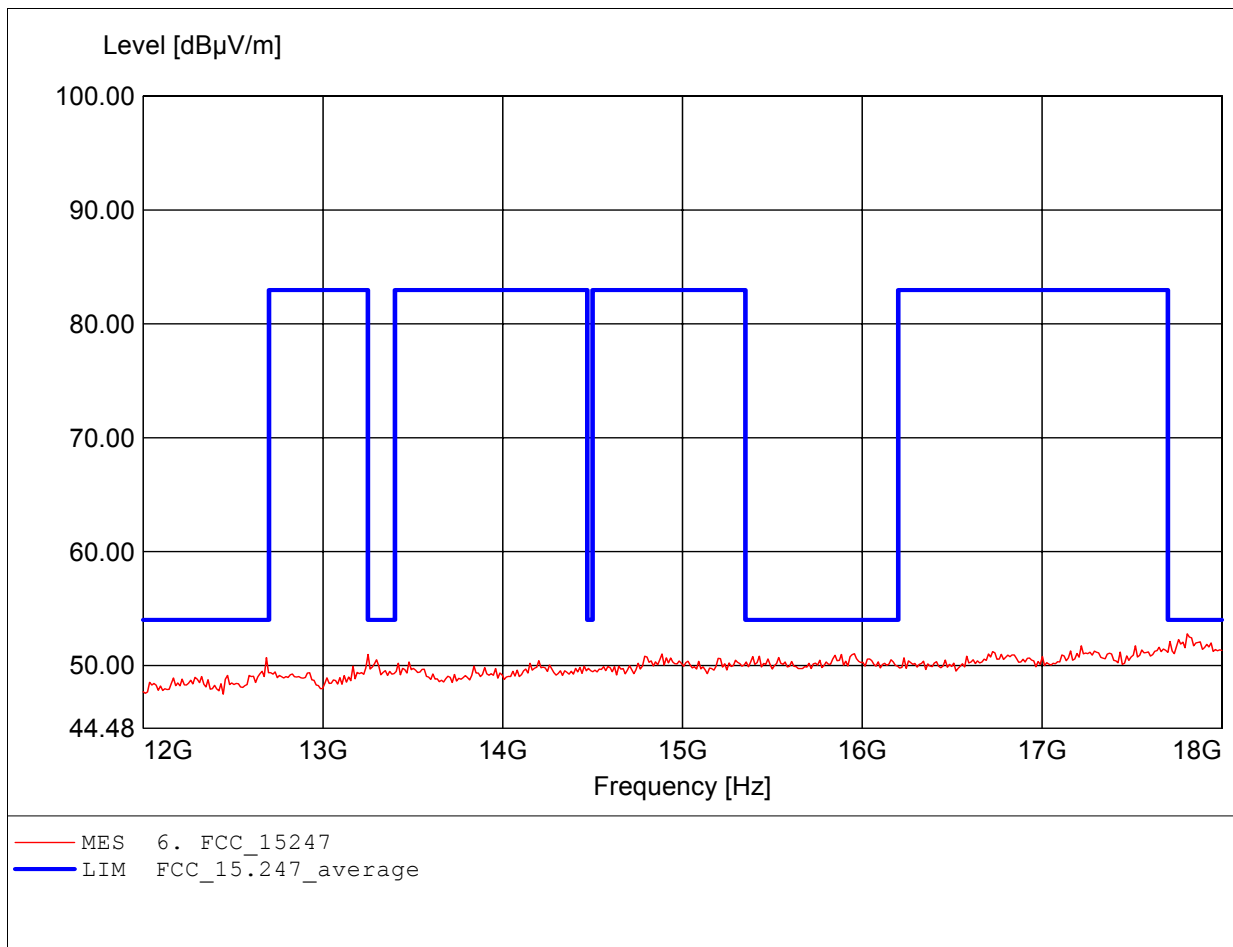

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C / LP0002


Order Number : W6M20606-7087 802.11b ch6  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 17.844GHz, Emax: 52.34dBµV/m, RBW: 1MHz

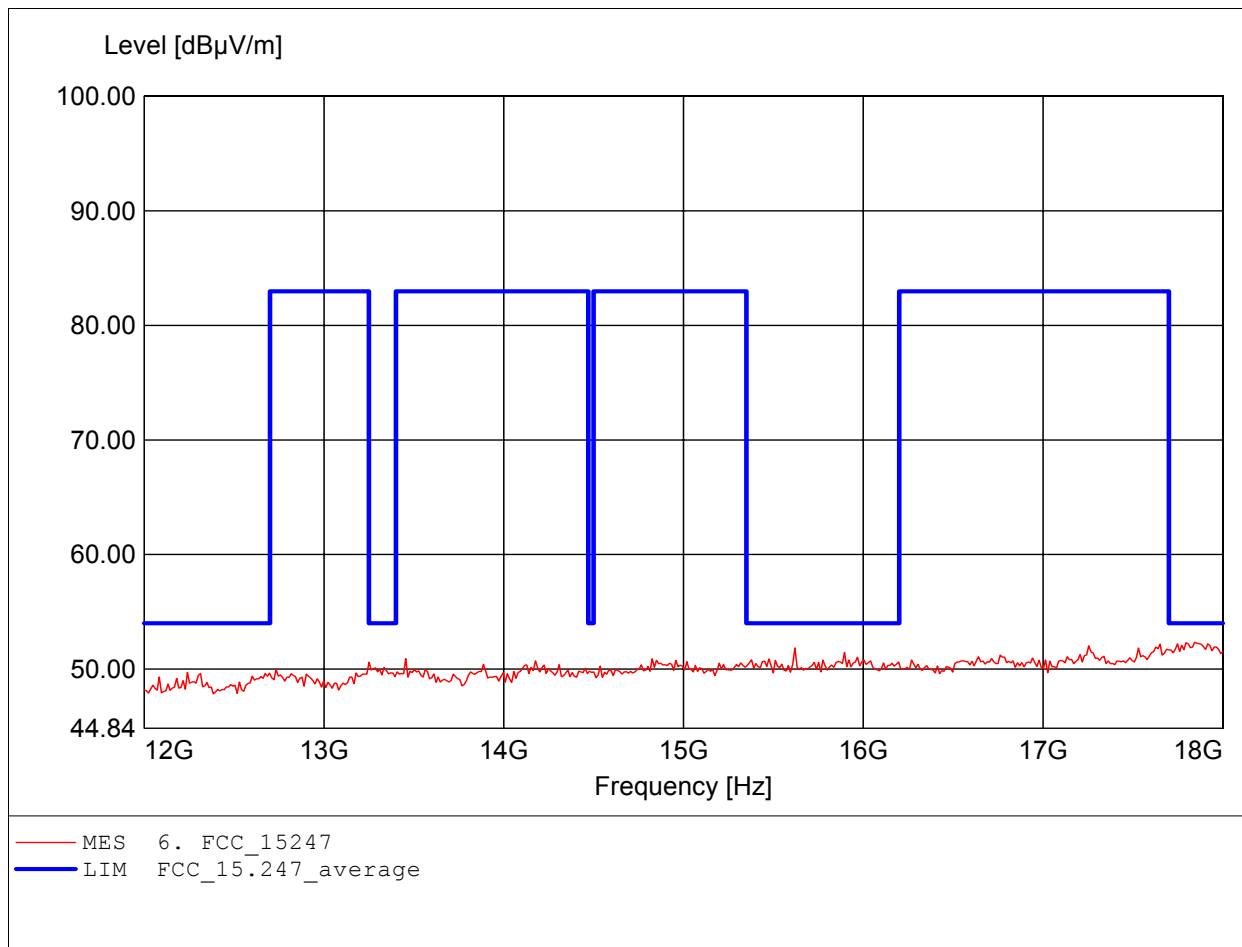

# Spurious emissions Field Strength

0

Order Number : W6M20606-7087 802.11b ch6  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 24.439GHz, Emax: 50.64dBμV/m, RBW: 1MHz

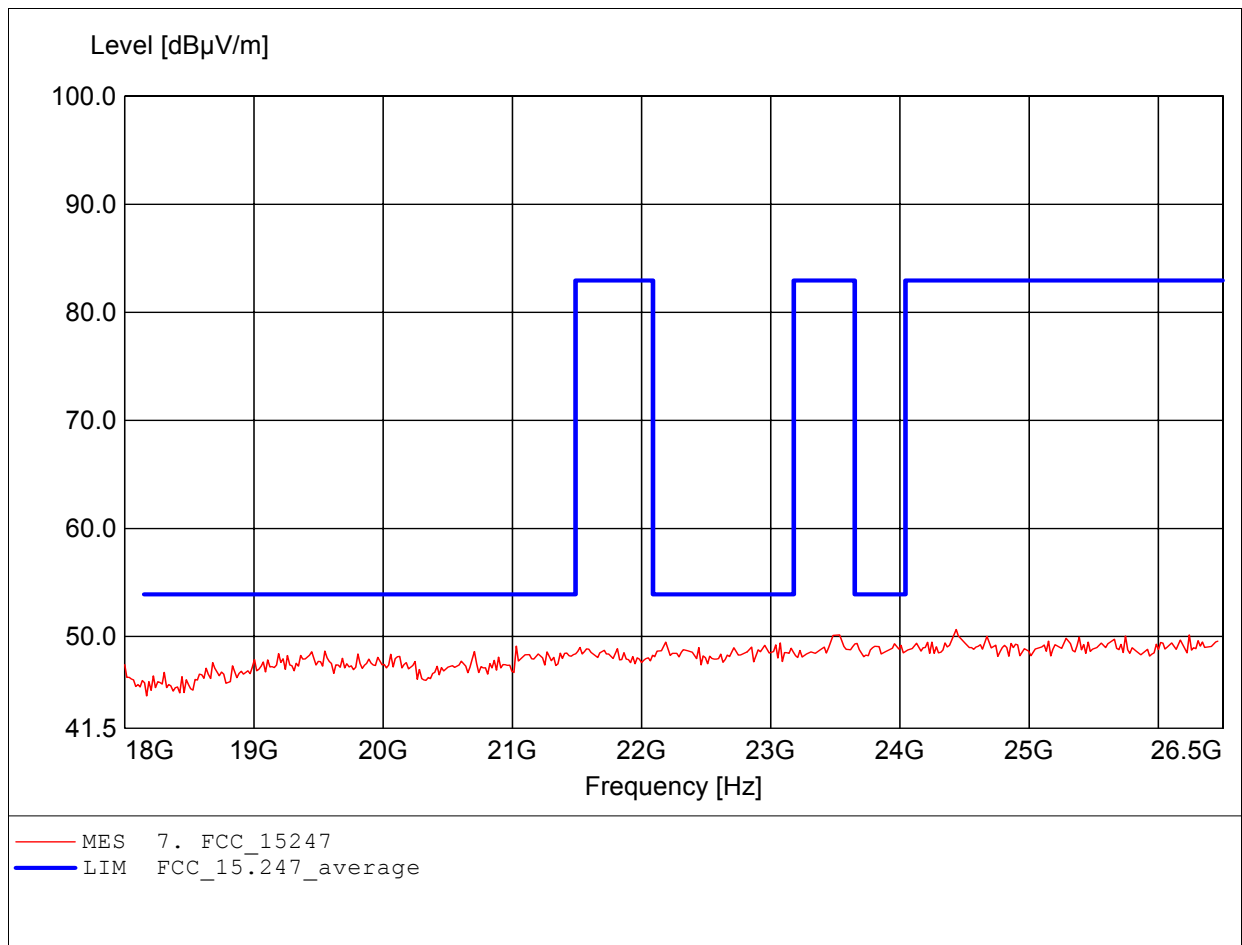




# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C / LP0002


Order Number : W6M20606-7087 802.11b ch6  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 25.682GHz, Emax: 50.39dBμV/m, RBW: 1MHz

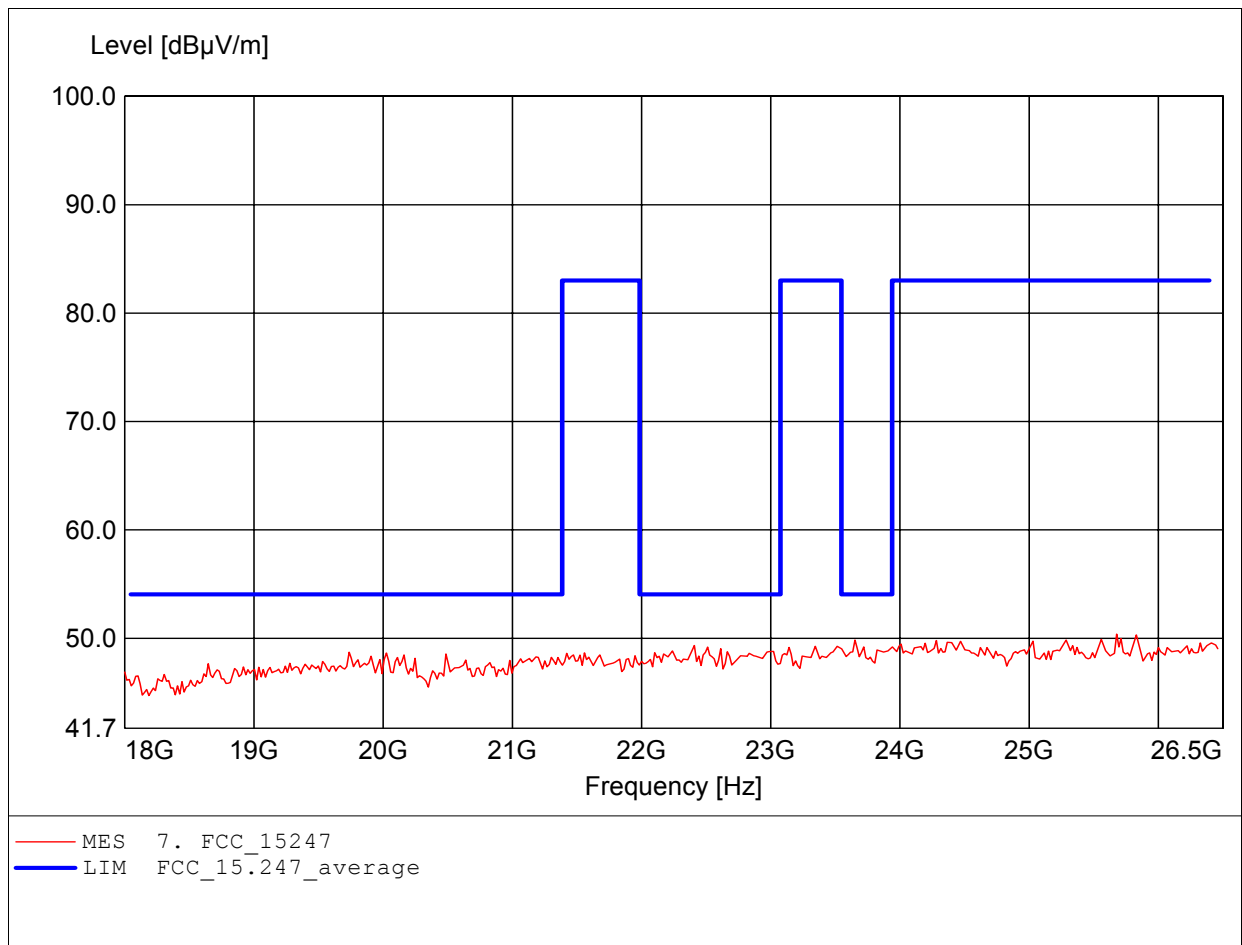

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C / LP0002


Order Number : W6M20606-7087 802.11b ch11  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 2.484GHz, Emax: 57.31dBµV/m, RBW: 1MHz

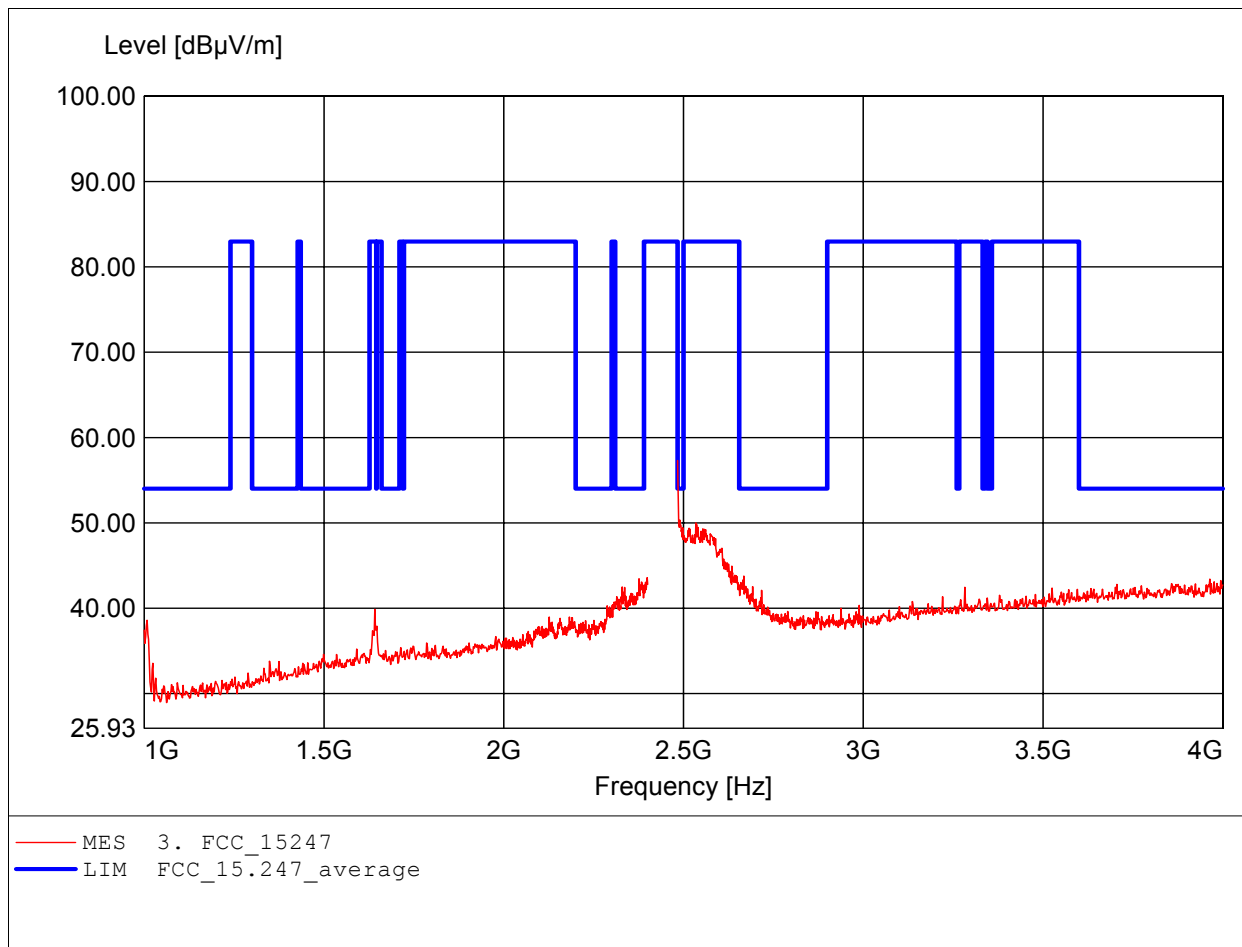

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C / LP0002


Order Number : W6M20606-7087 802.11b ch11  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 2.484GHz, Emax: 47.58dBµV/m, RBW: 1MHz

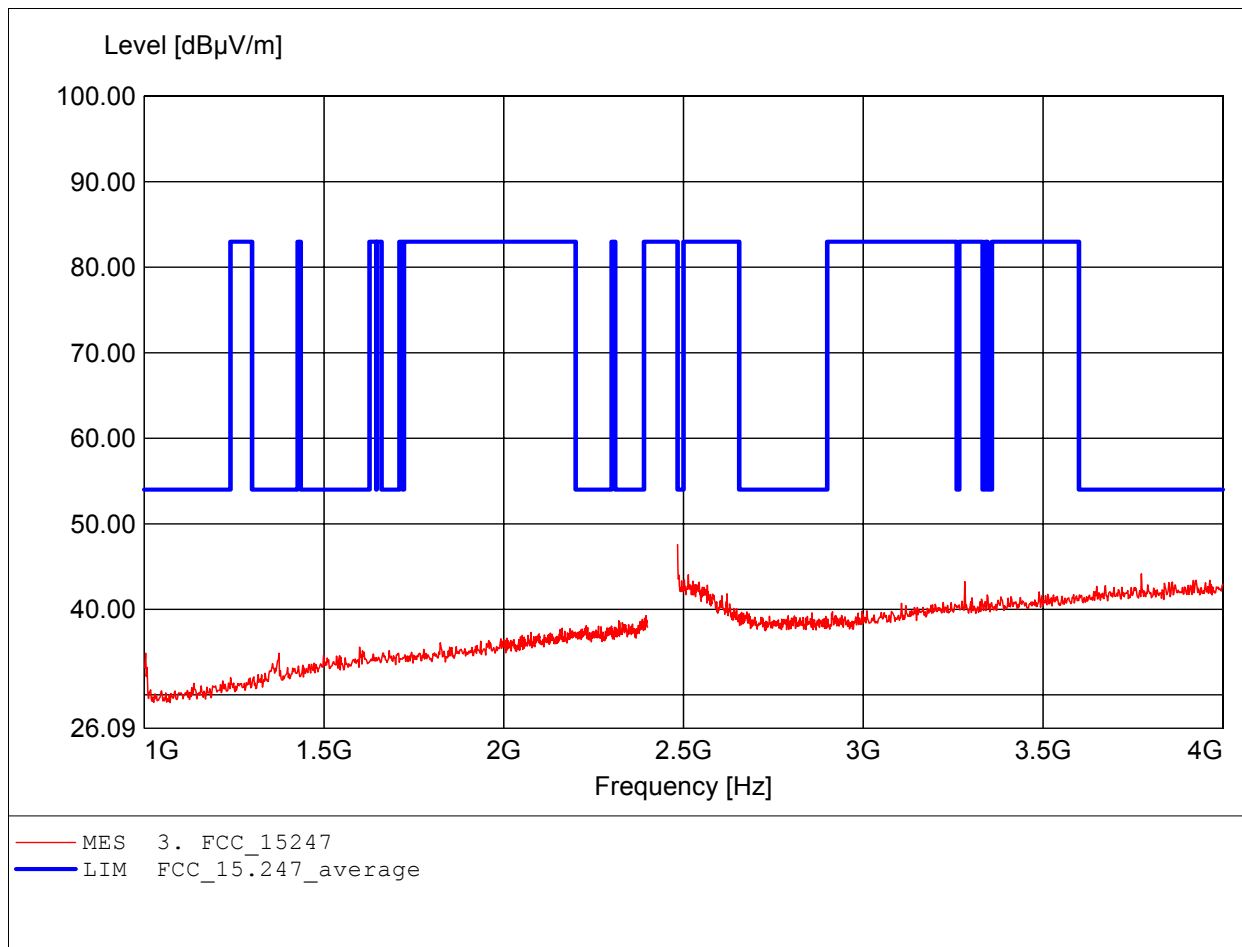

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C / LP0002


Order Number : W6M20606-7087 802.11b ch11  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 6.565GHz, Emax: 53.38dBµV/m, RBW: 1MHz

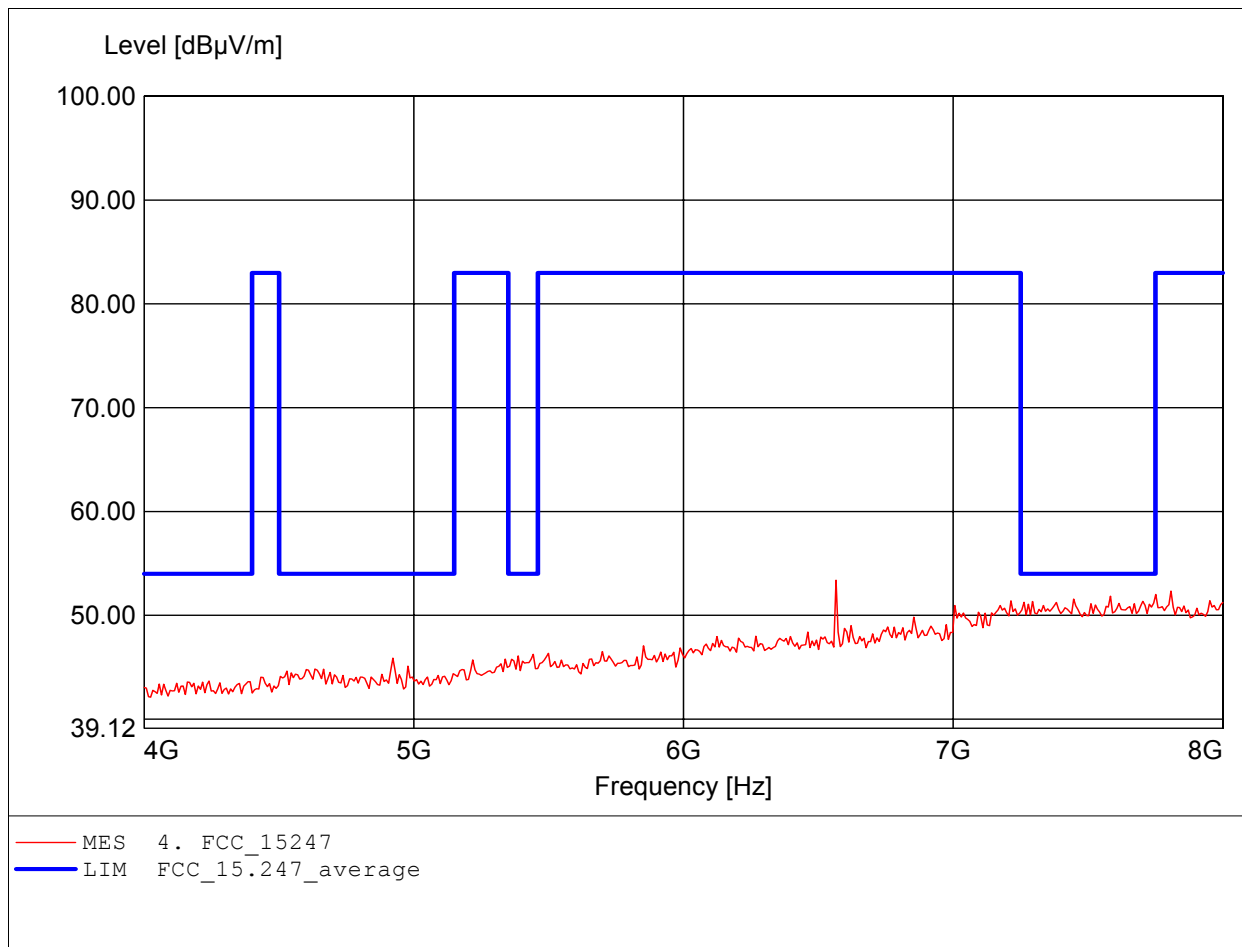

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C / LP0002


Order Number : W6M20606-7087 802.11b ch11  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 6.565GHz, Emax: 52.39dBμV/m, RBW: 1MHz

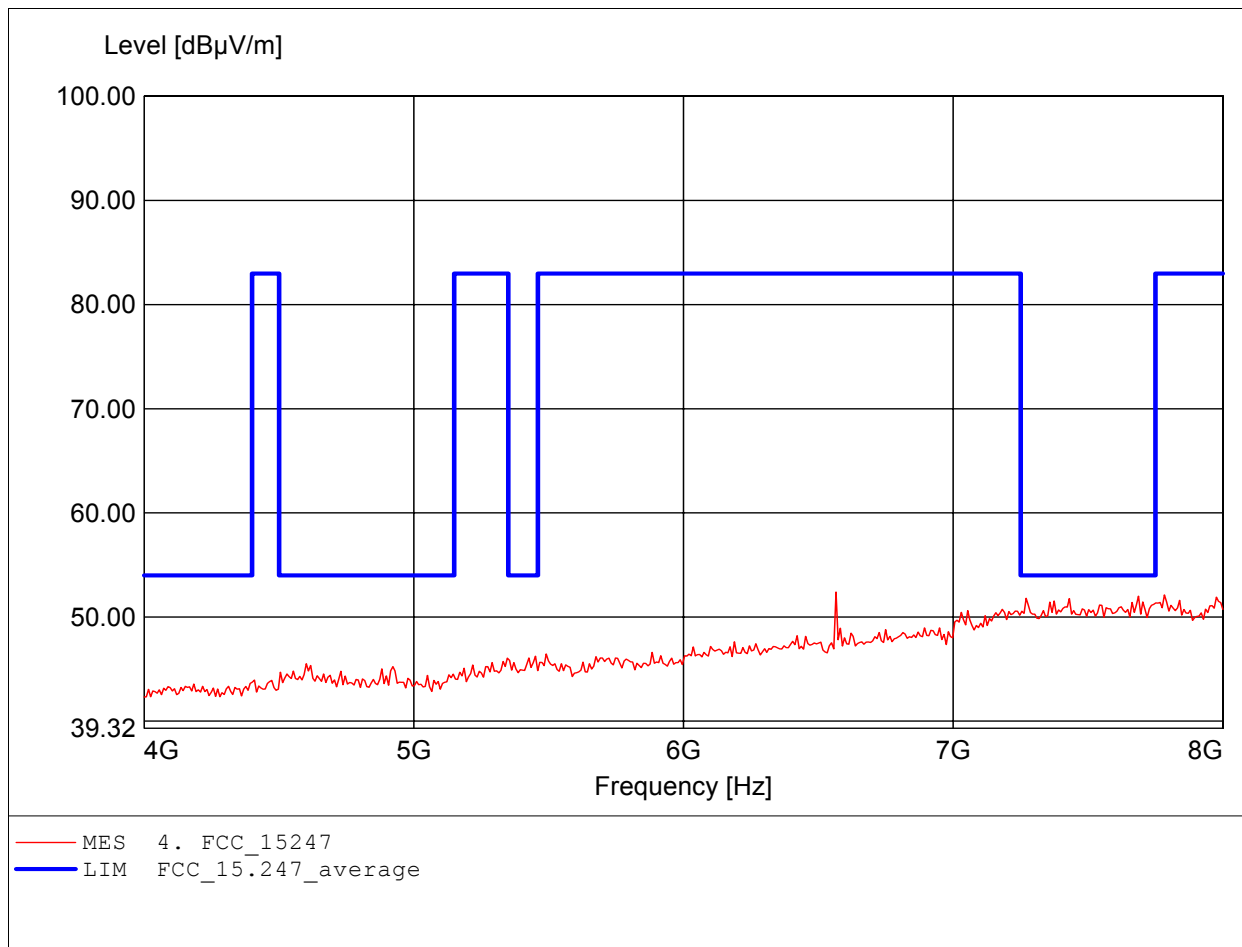

**Spurious emissions Field Strength**

**FCC RULES PART 15, SUBPART C / LP0002**


Order Number : W6M20606-7087 802.11b ch11  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 11.383GHz, Emax: 48.21dBµV/m, RBW: 1MHz

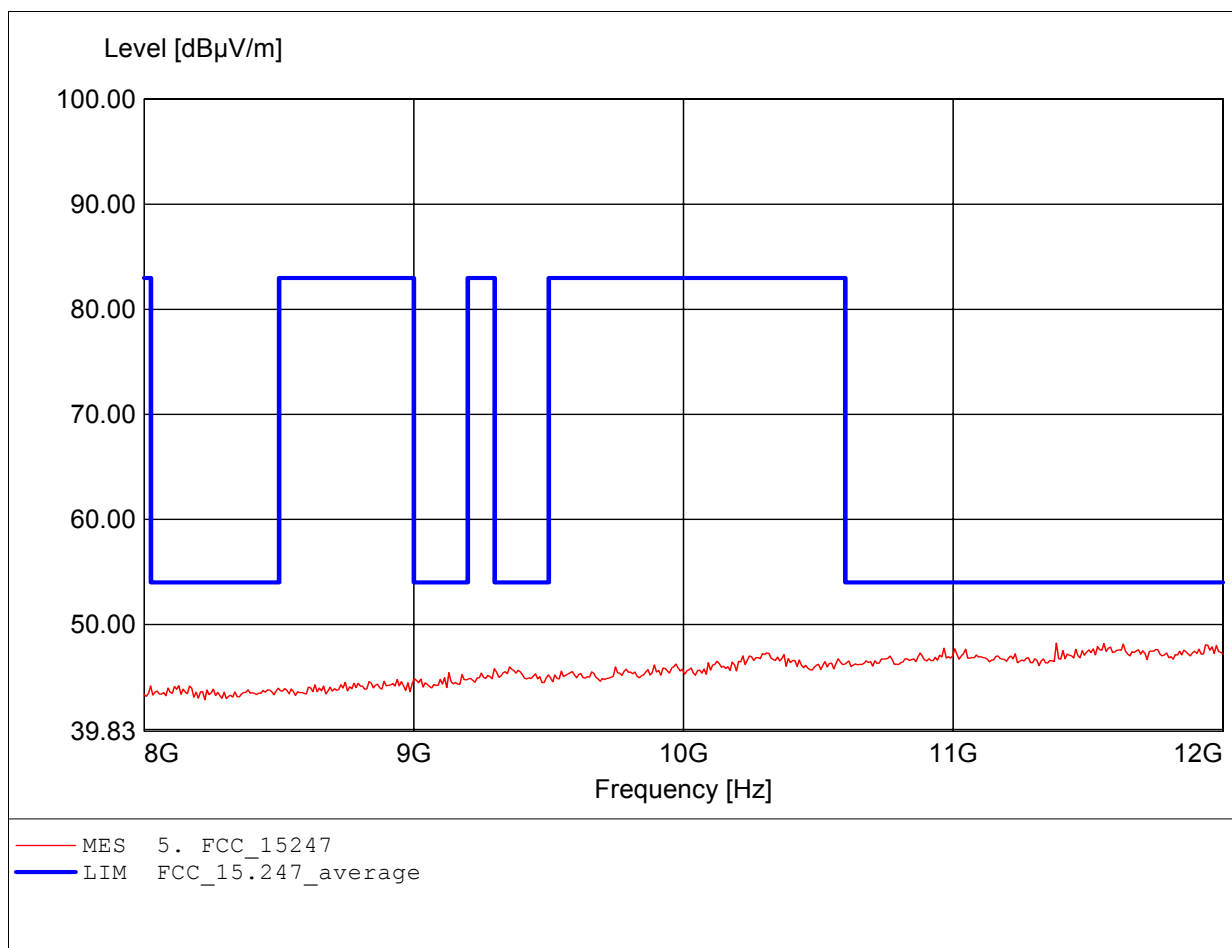

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C / LP0002


Order Number : W6M20606-7087 802.11b ch11  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 11.599GHz, Emax: 48.45dBµV/m, RBW: 1MHz

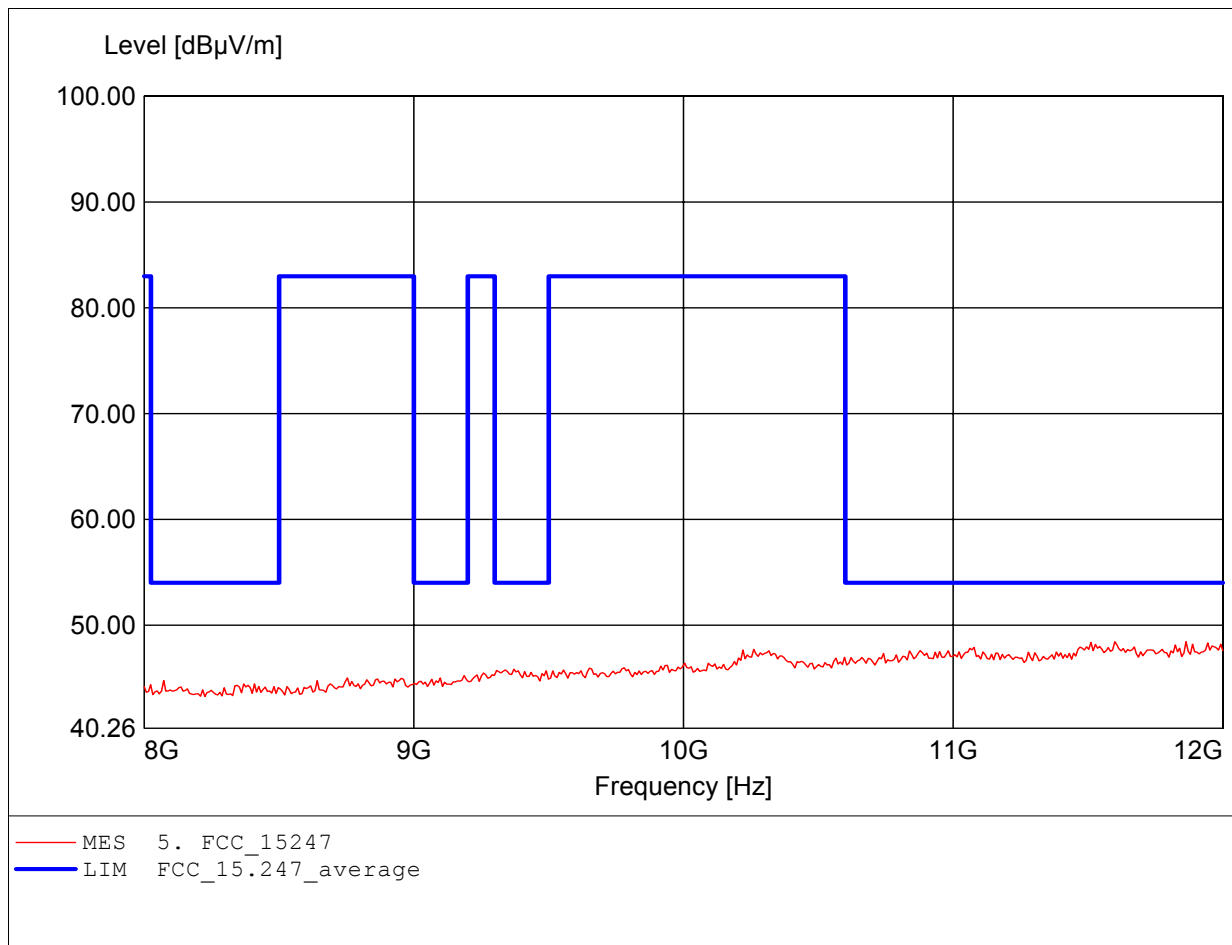

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C / LP0002

Order Number : W6M20606-7087 802.11b ch11  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 17.916GHz, Emax: 52.69dBμV/m, RBW: 1MHz

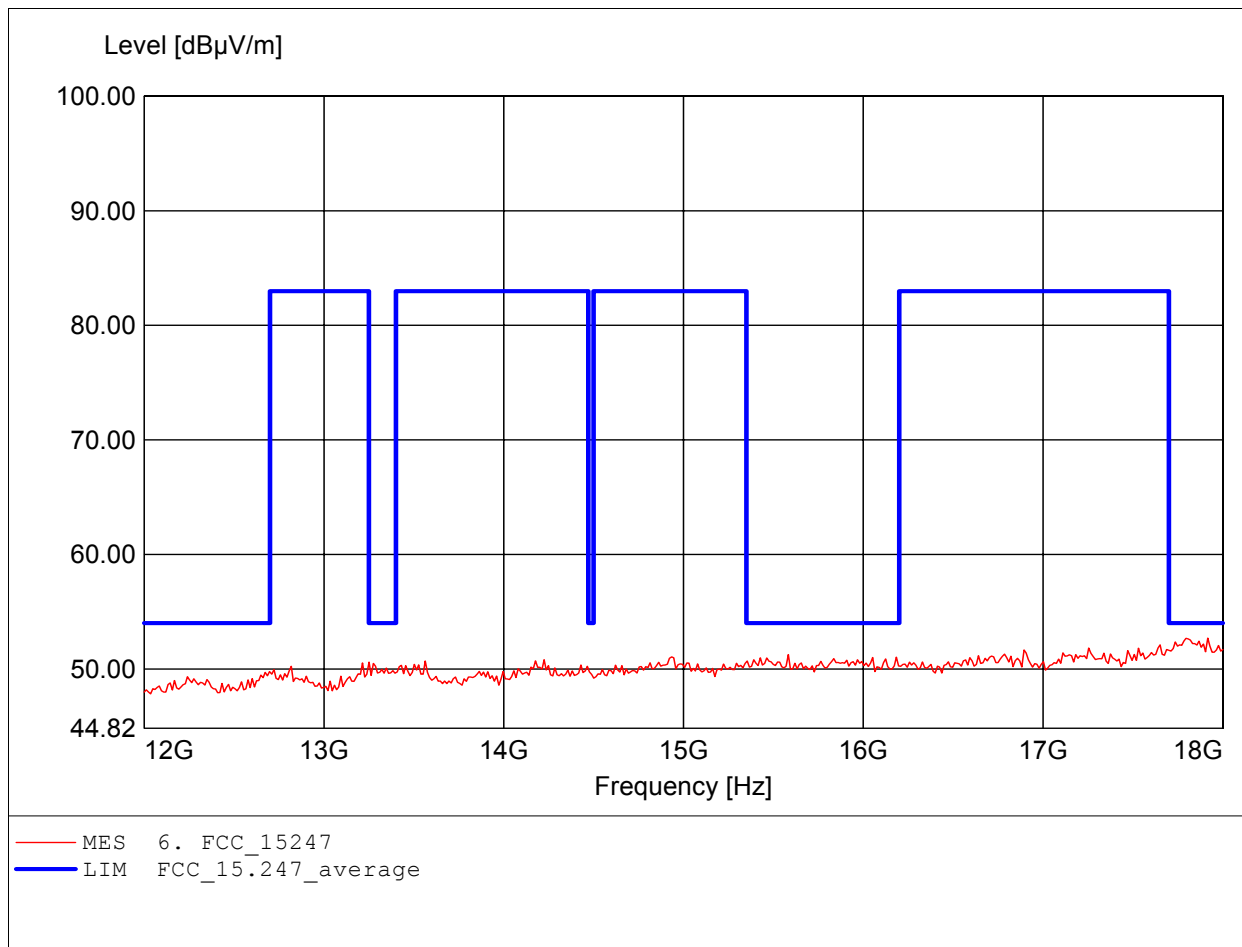




# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C / LP0002


Order Number : W6M20606-7087 802.11b ch11  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 17.832GHz, Emax: 52.63dBµV/m, RBW: 1MHz

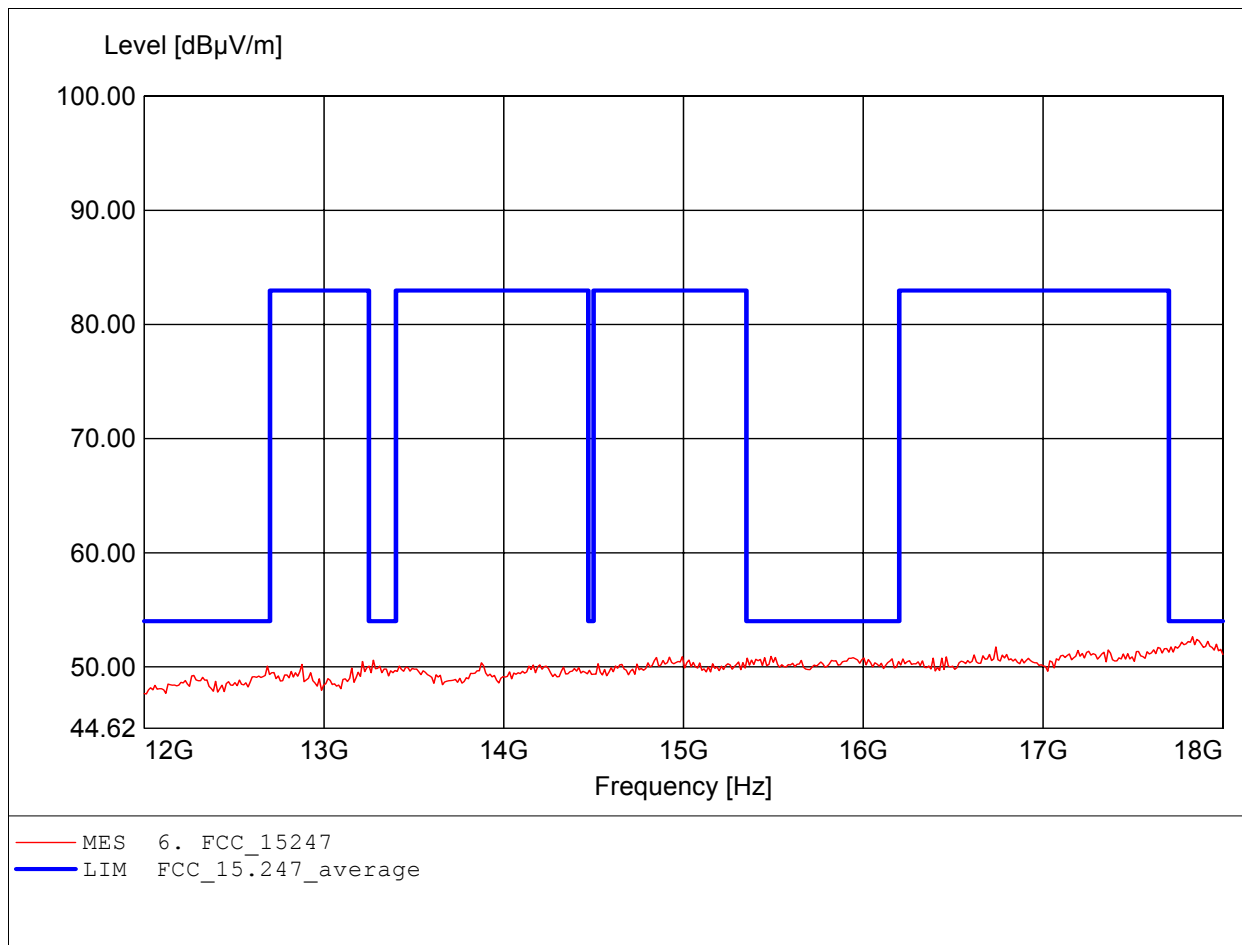

**Spurious emissions Field Strength**

**FCC RULES PART 15, SUBPART C / LP0002**


Order Number : W6M20606-7087 802.11b ch11  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 23.775GHz, Emax: 50.02dBµV/m, RBW: 1MHz

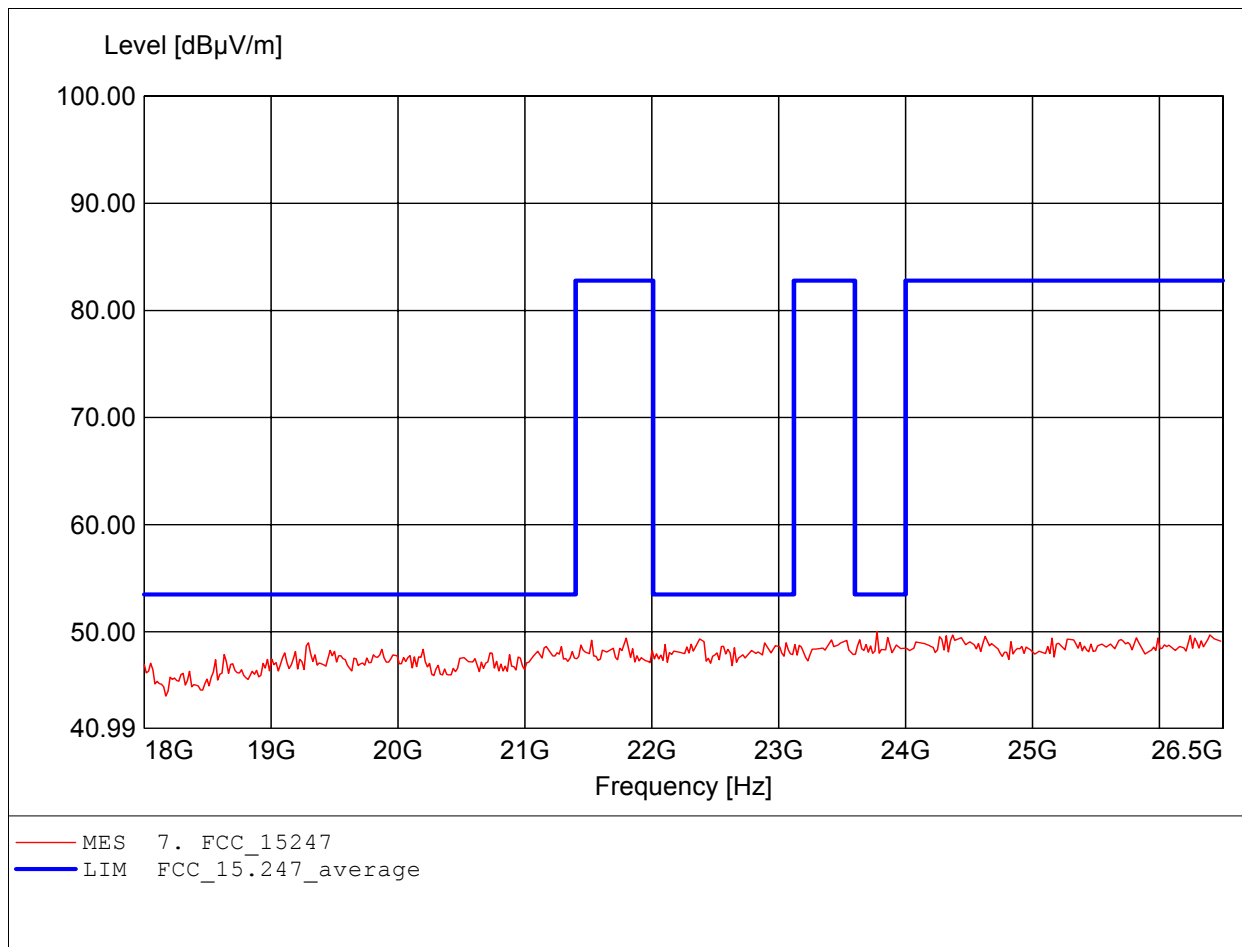


# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C / LP0002

Order Number : W6M20606-7087 802.11b ch11  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 24.183GHz, Emax: 50.41dBµV/m, RBW: 1MHz

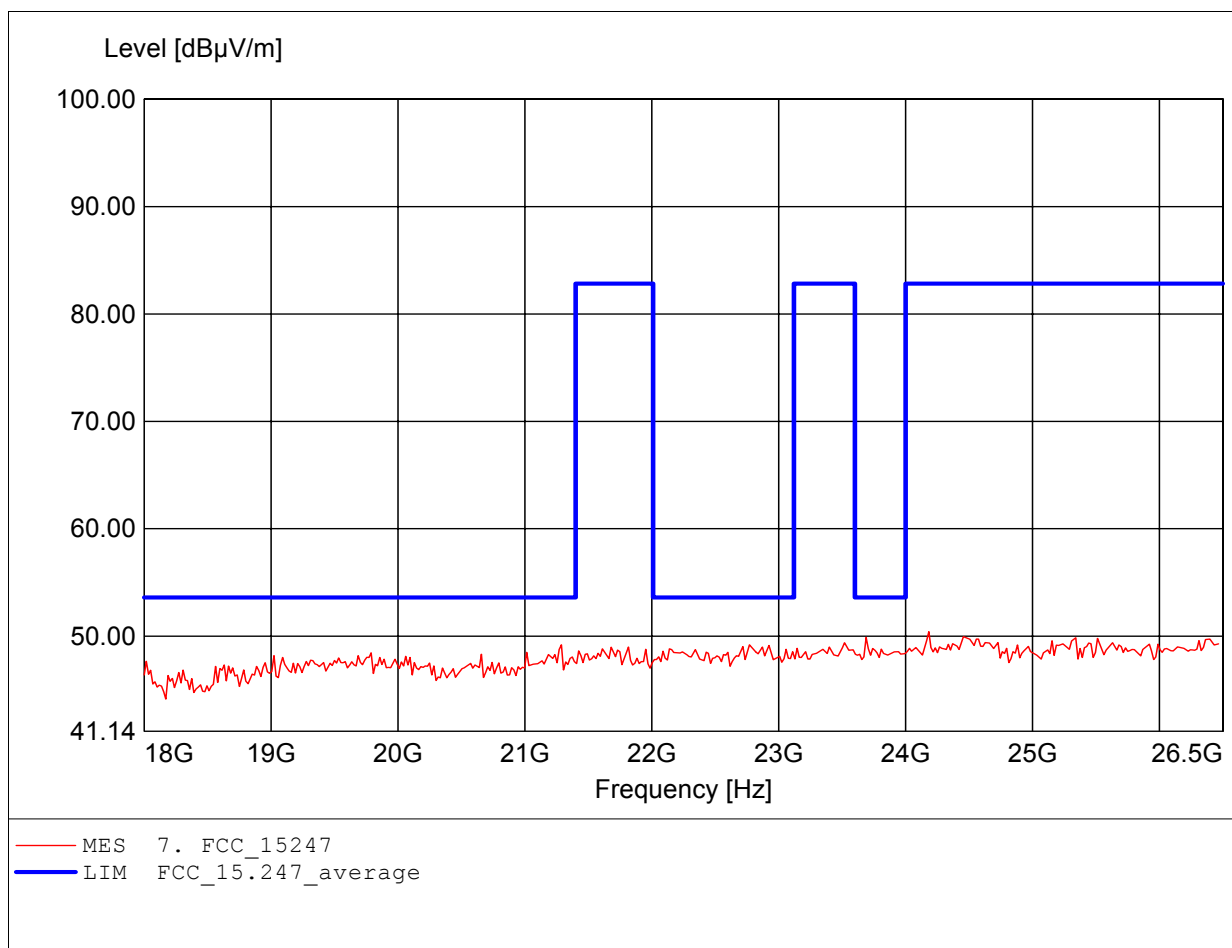




Registration number: W6M20606-7087-C-1  
FCC ID: RXZ-WU61RL

## **Appendix C**

### Band Edge Measurement



Ref 13.5 dBm      \*Att 30 dB      \*RBW 100 kHz      Delta 1 [T1 ]  
\*VBW 300 kHz      38.43 dB  
\*SWT 200 ms      12.692307692 MHz

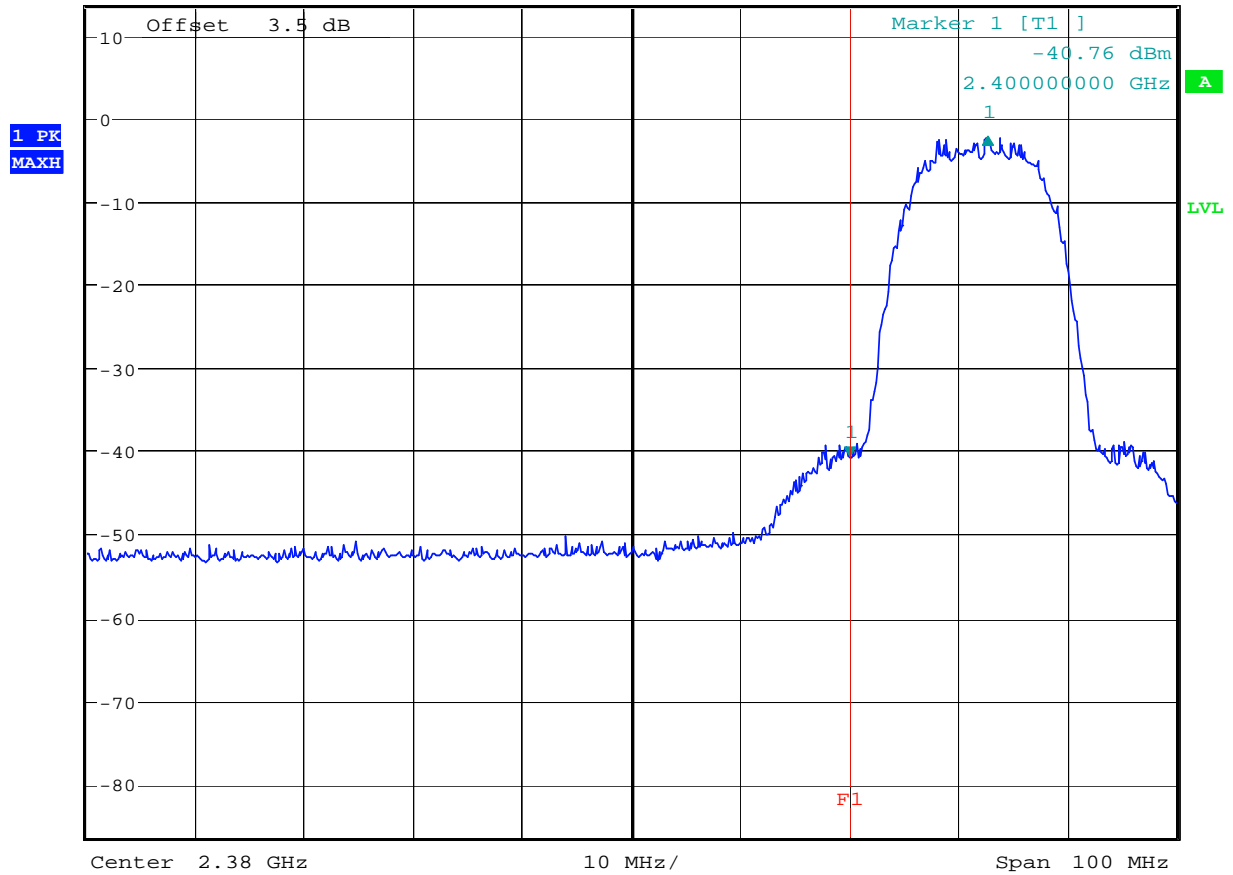

BANDEDGE 802.11b CH1


Date: 30.JUN.2006 09:48:46



\*RBW 100 kHz      Delta 1 [T1 ]  
\*VBW 300 kHz      50.45 dB  
\*SWT 200 ms      -19.557692308 MHz

Ref 13.5 dBm      \*Att 30 dB

1 PK  
MAXH

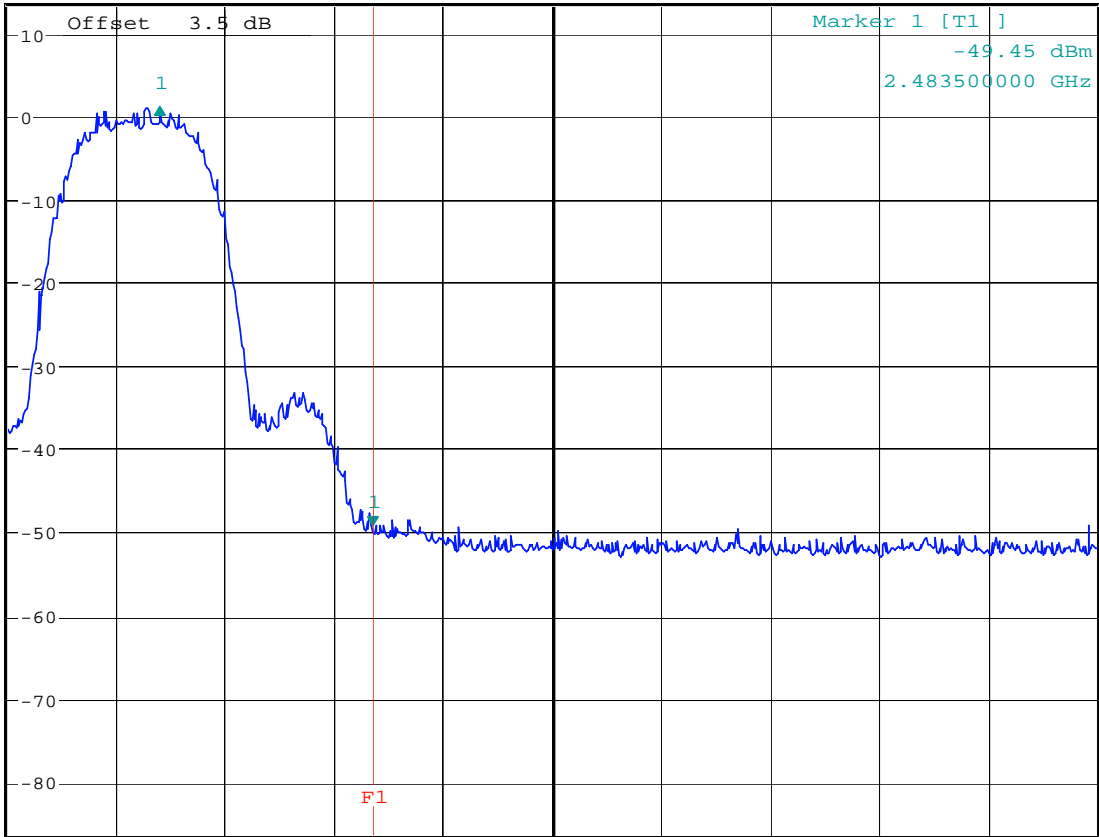


Center 2.5 GHz

10 MHz/

Span 100 MHz

BANDEDGE 802.11b CH11

Date: 30.JUN.2006 09:51:59



Registration number: W6M20606-7087-C-1  
FCC ID: RXZ-WU61RL


## **Appendix D**

Minimum 6dB Bandwidth






\*RBW 100 kHz    Marker 1 [T1]    3.58 dBm  
 \*VBW 300 kHz  
 Ref 13.5 dBm    \*Att 30 dB    \*SWT 300 ms    2.437780000 GHz

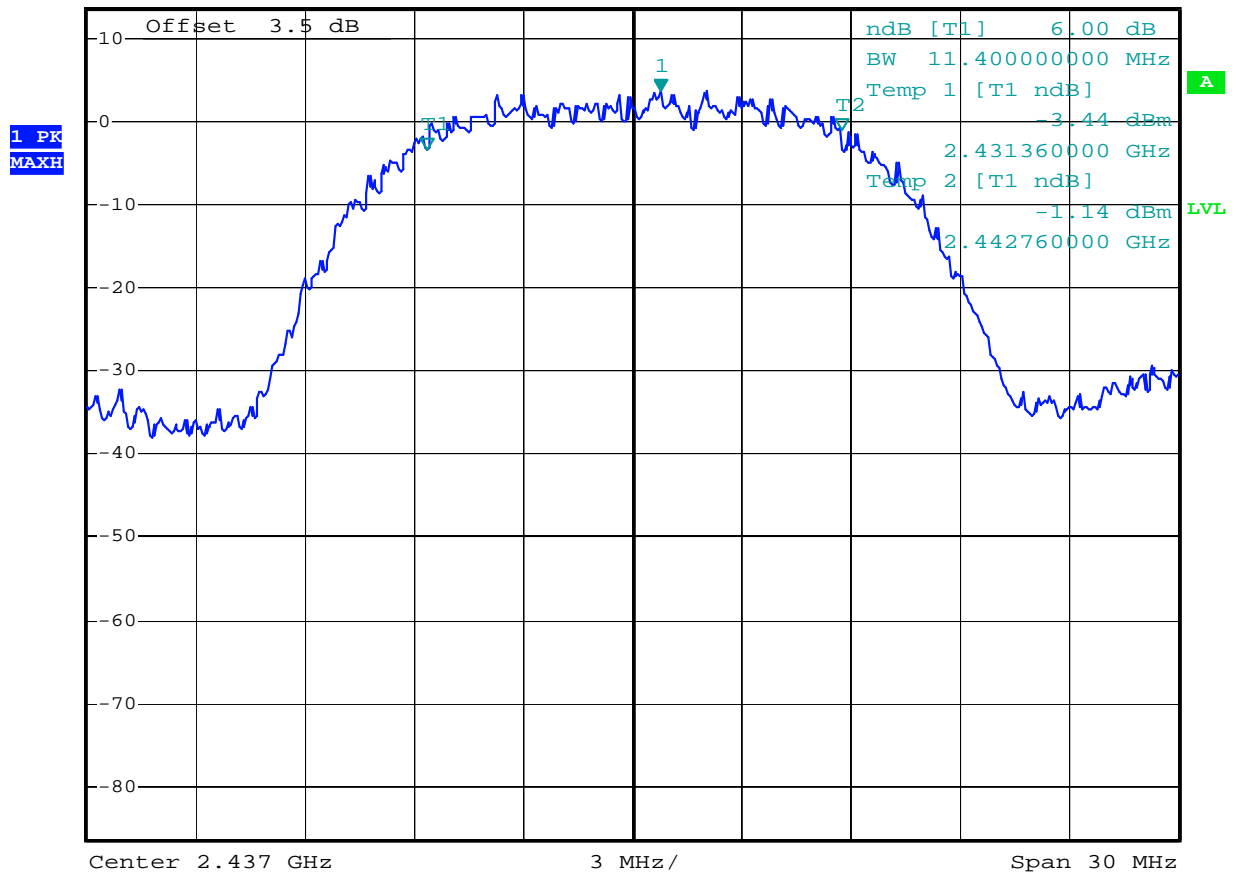

6dB BANDWIDTH 802.11b CH6

Date: 29.JUN.2006 18:24:11






Registration number: W6M20606-7087-C-1  
FCC ID: RXZ-WU61RL

## **Appendix E**

### Peak Power Spectral Density



Ref 13.5 dBm      \*Att 30 dB      \*RBW 3 kHz      Marker 1 [T1 ]  
\*VBW 100 kHz      -11.03 dBm  
\*SWT 500 s      2.437369000 GHz

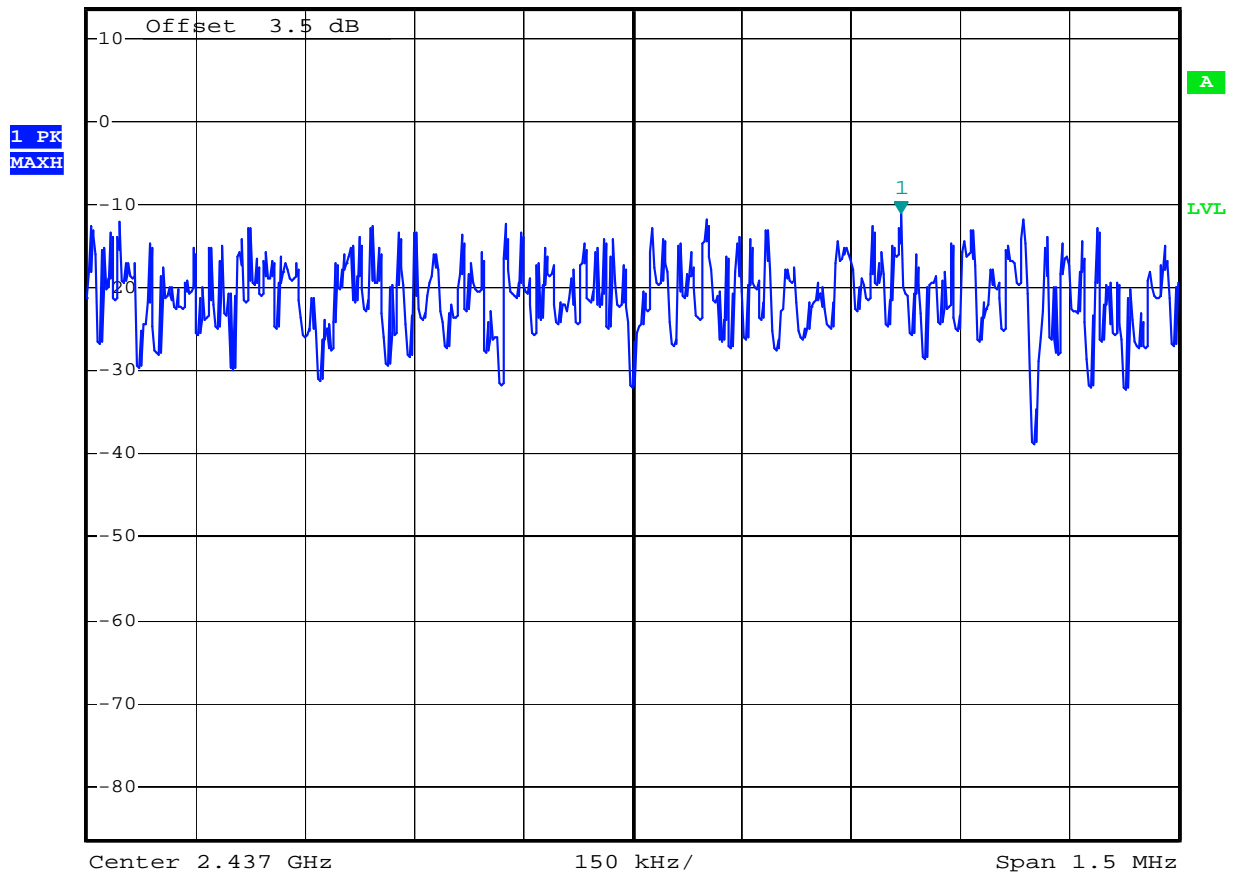

POWER DENSITY 802.11b CH6

Date: 29.JUN.2006 18:18:51





Registration number: W6M20606-7087-C-1  
FCC ID: RXZ-WU61RL

## **Appendix F**


Radiated Emissions from Receiver Section of Transceiver

**The measurement diagram are wideband pre-scan results; only for reference.**

**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**

Order Number : W6M20606-7087  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HK 116  
Freq:49.419MHz Emax:30.54dBµV/m RBW: 100 kHz

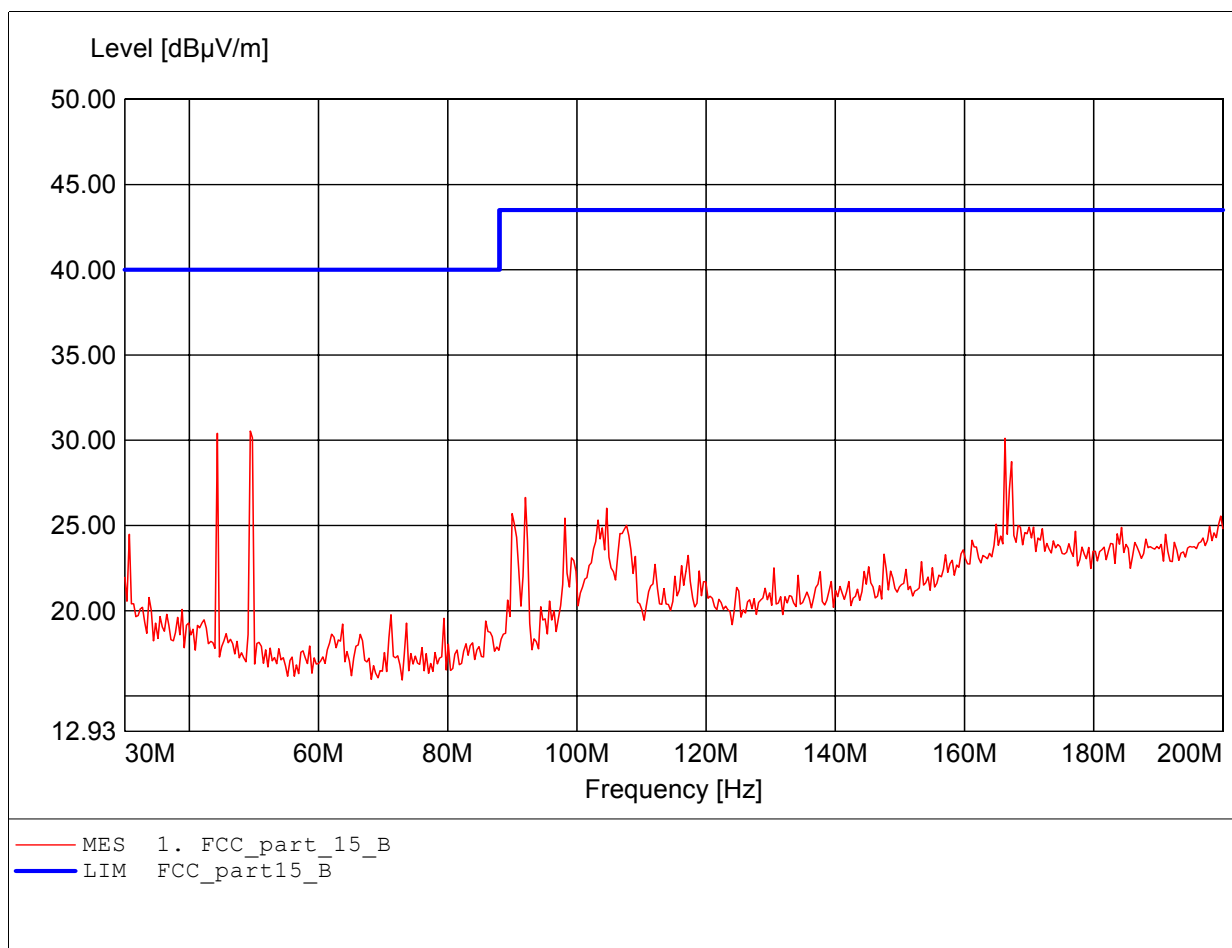




**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**


Order Number : W6M20606-7087  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HK 116  
Freq:166.613MHz Emax:34.23dBµV/m RBW: 100 kHz

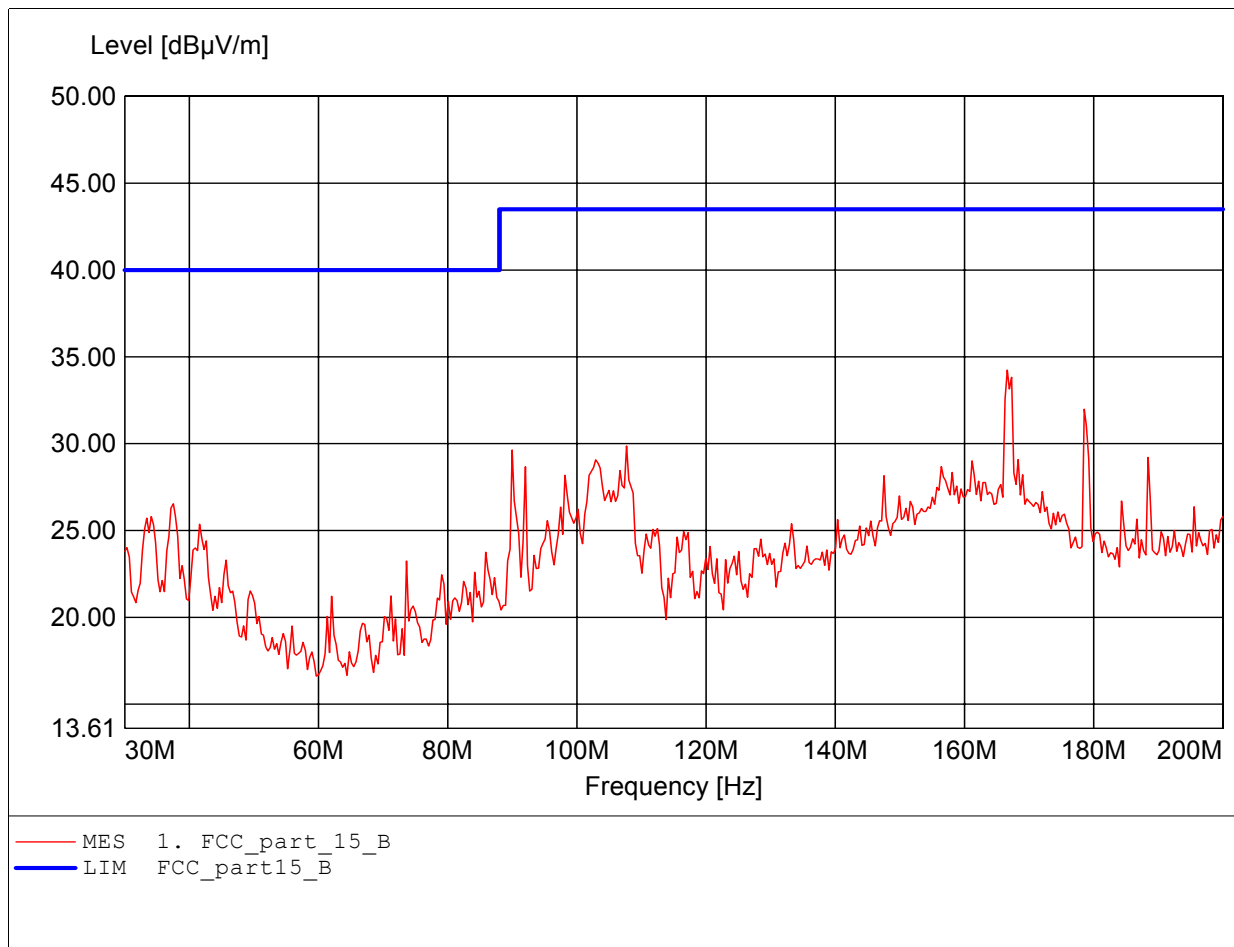

**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**


Order Number : W6M20606-7087  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.  
Freq:501.403MHz Emax:40.52dBµV/m RBW: 100 kHz

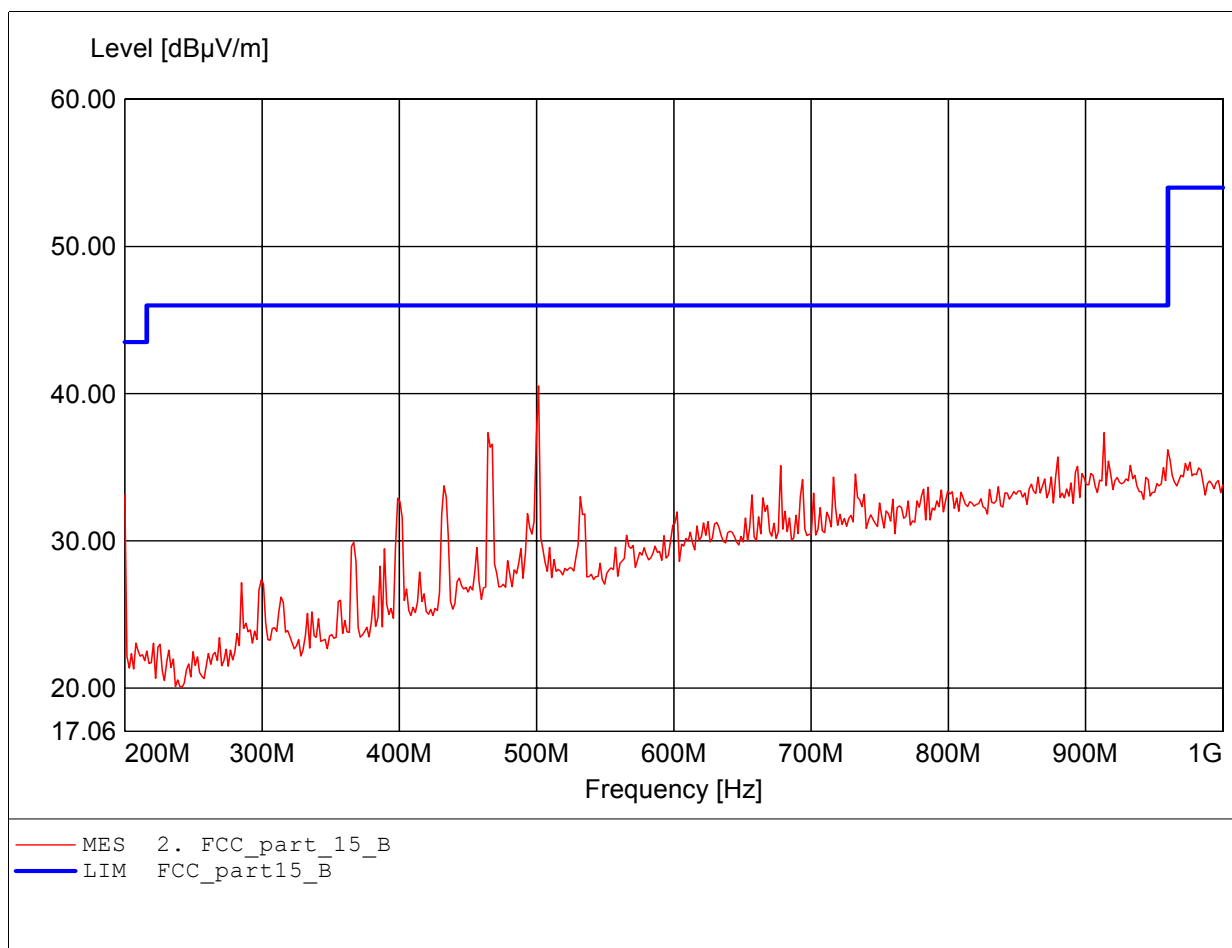

**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**


Order Number : W6M20606-7087  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.  
Freq:913.427MHz Emax:39.95dBµV/m RBW: 100 kHz

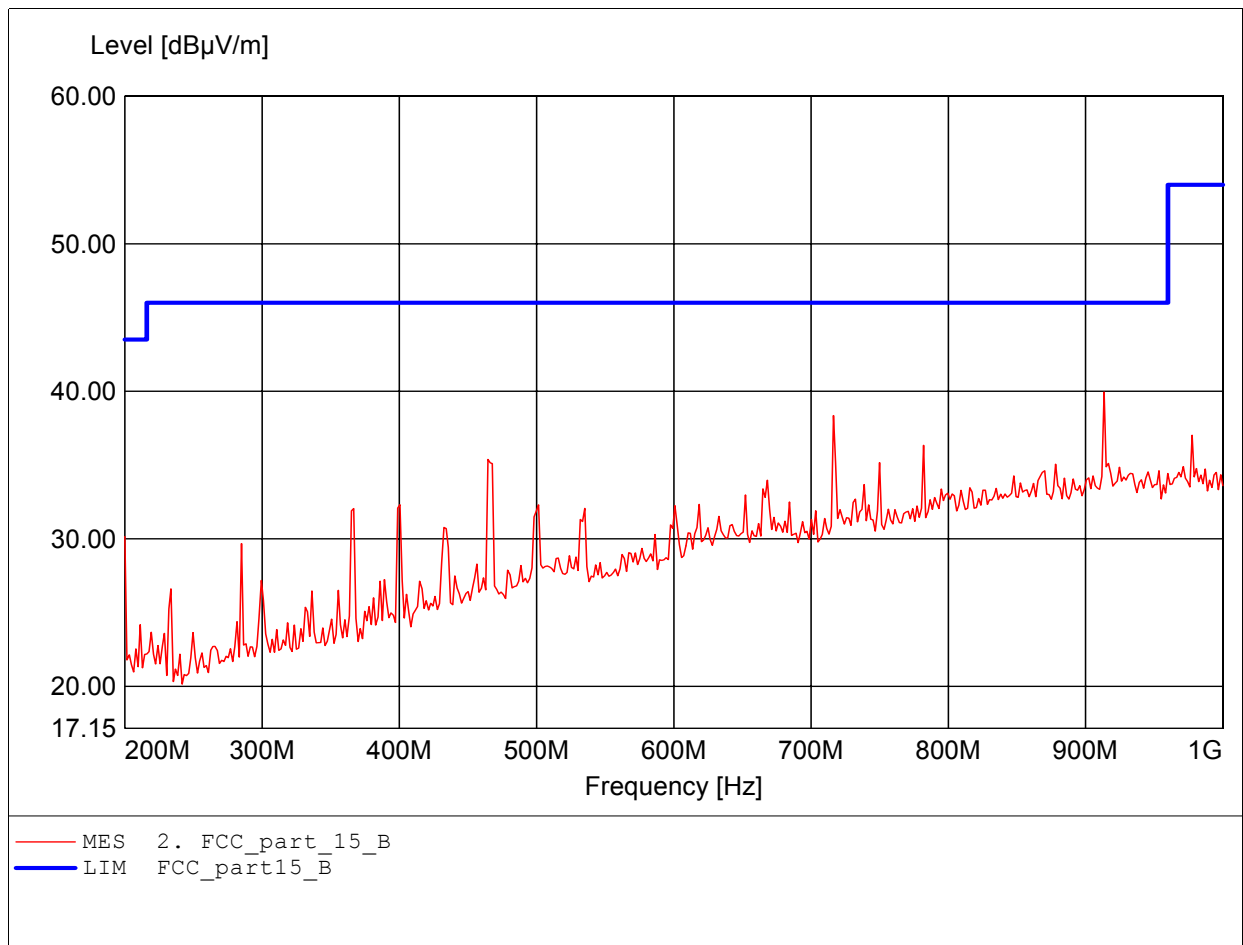

**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**


Order Number: W6M20606-7087 802.11b ch1  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:3.218GHz Emax:47.81dBµV/m RBW: 1 MHz

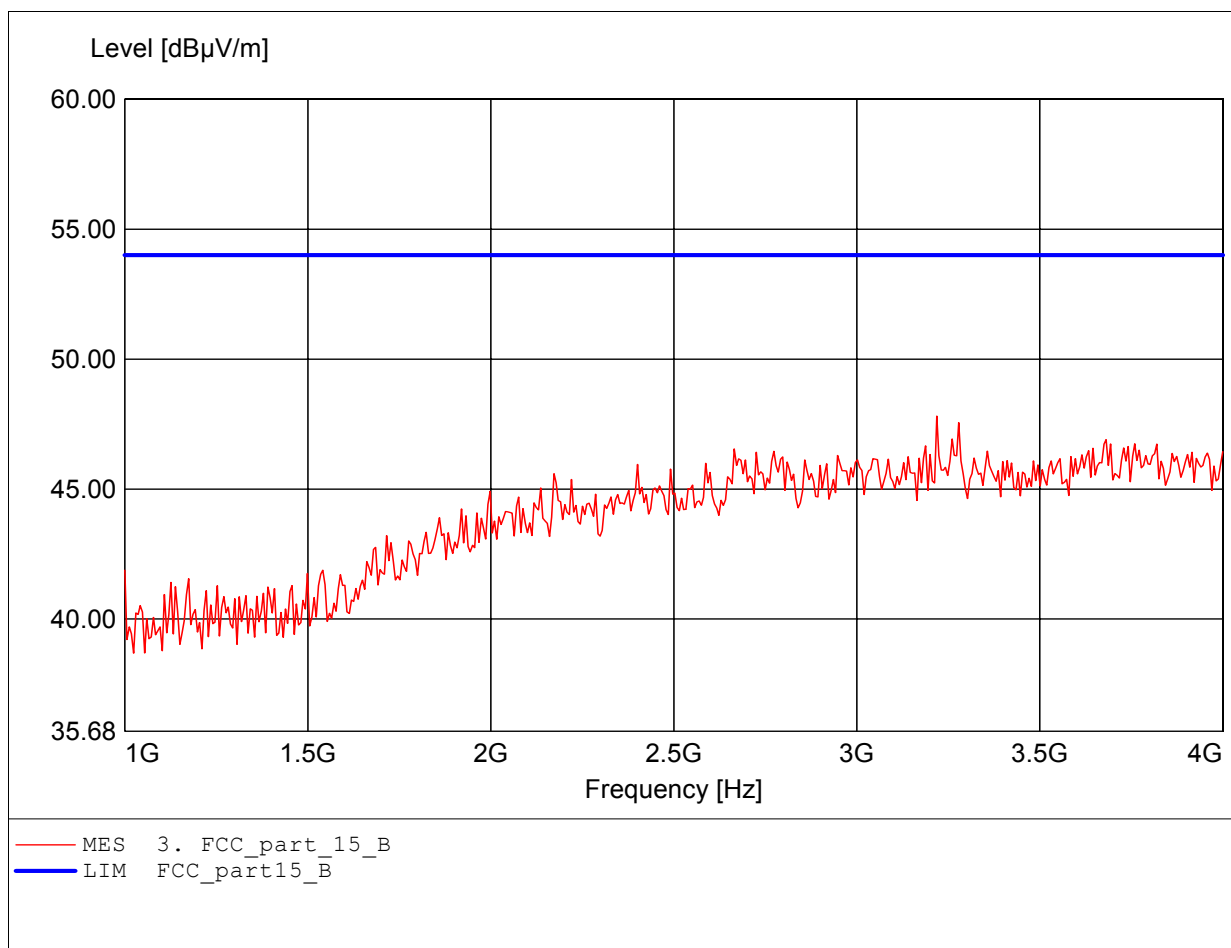

**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**


Order Number: W6M20606-7087 802.11b ch1  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:1.499GHz Emax:50.76dBµV/m RBW: 1 MHz

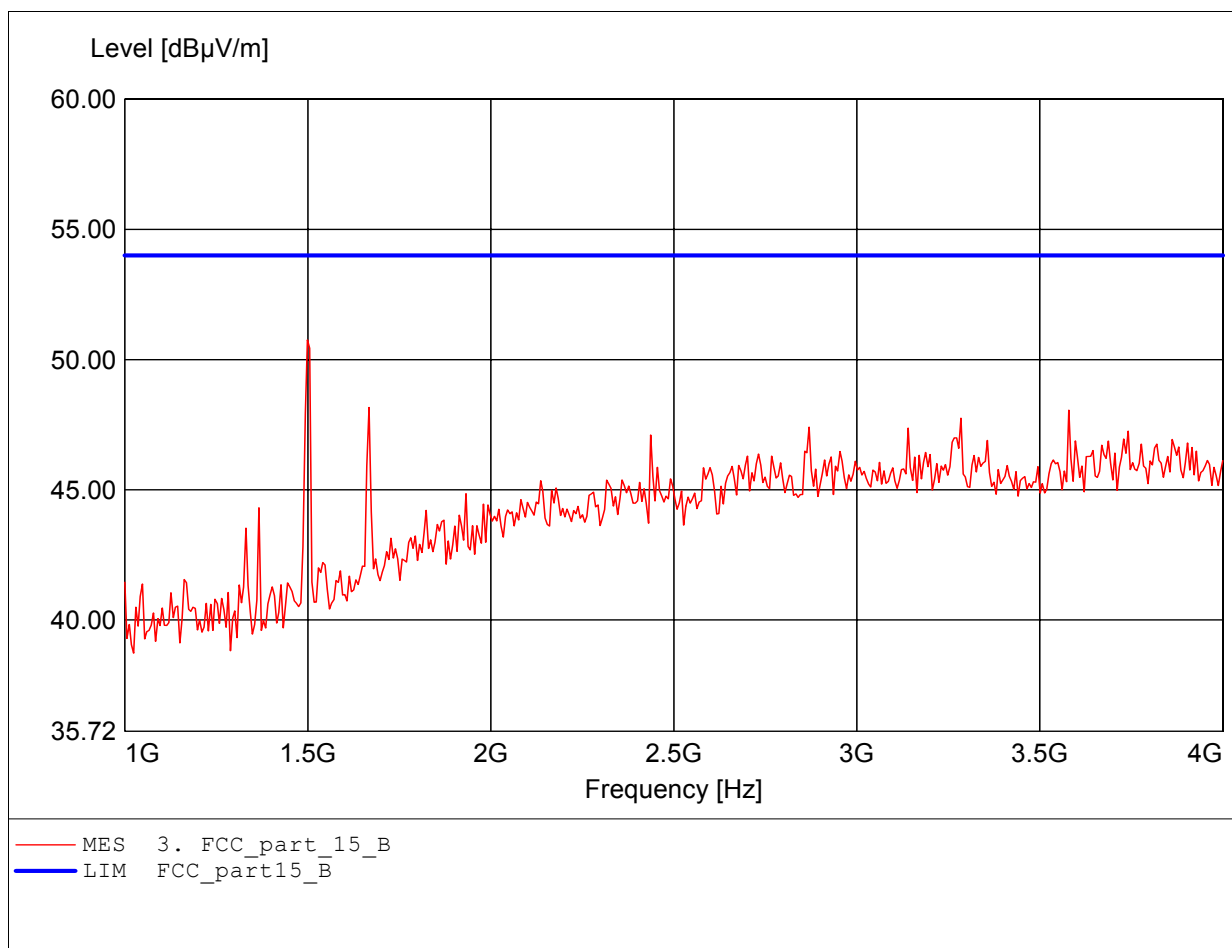

**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**


Order Number: W6M20606-7087 802.11b ch1  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:7.246GHz Emax:51.77dBµV/m RBW: 1 MHz

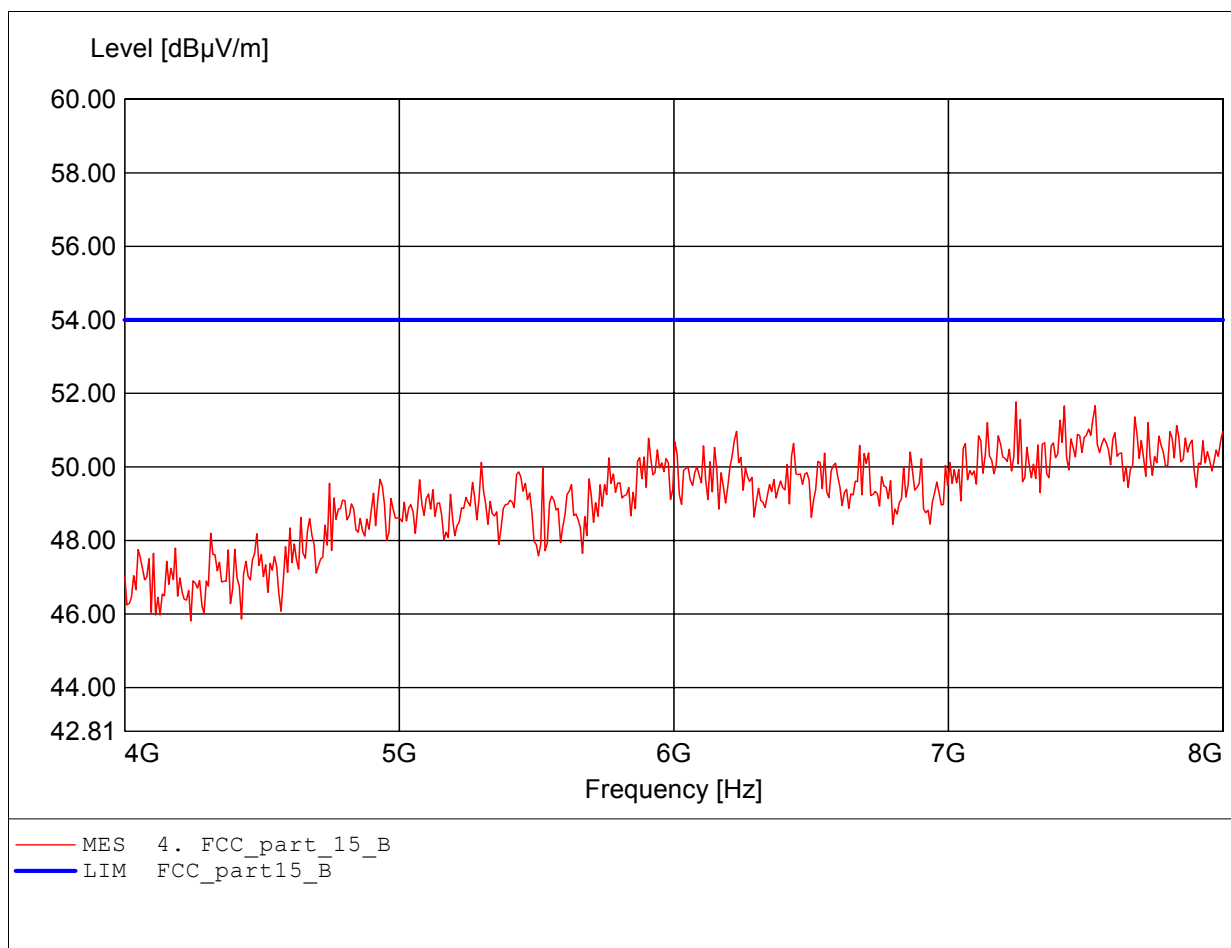

**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**


Order Number: W6M20606-7087 802.11b ch1  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:7.519GHz Emax:51.80dBµV/m RBW: 1 MHz

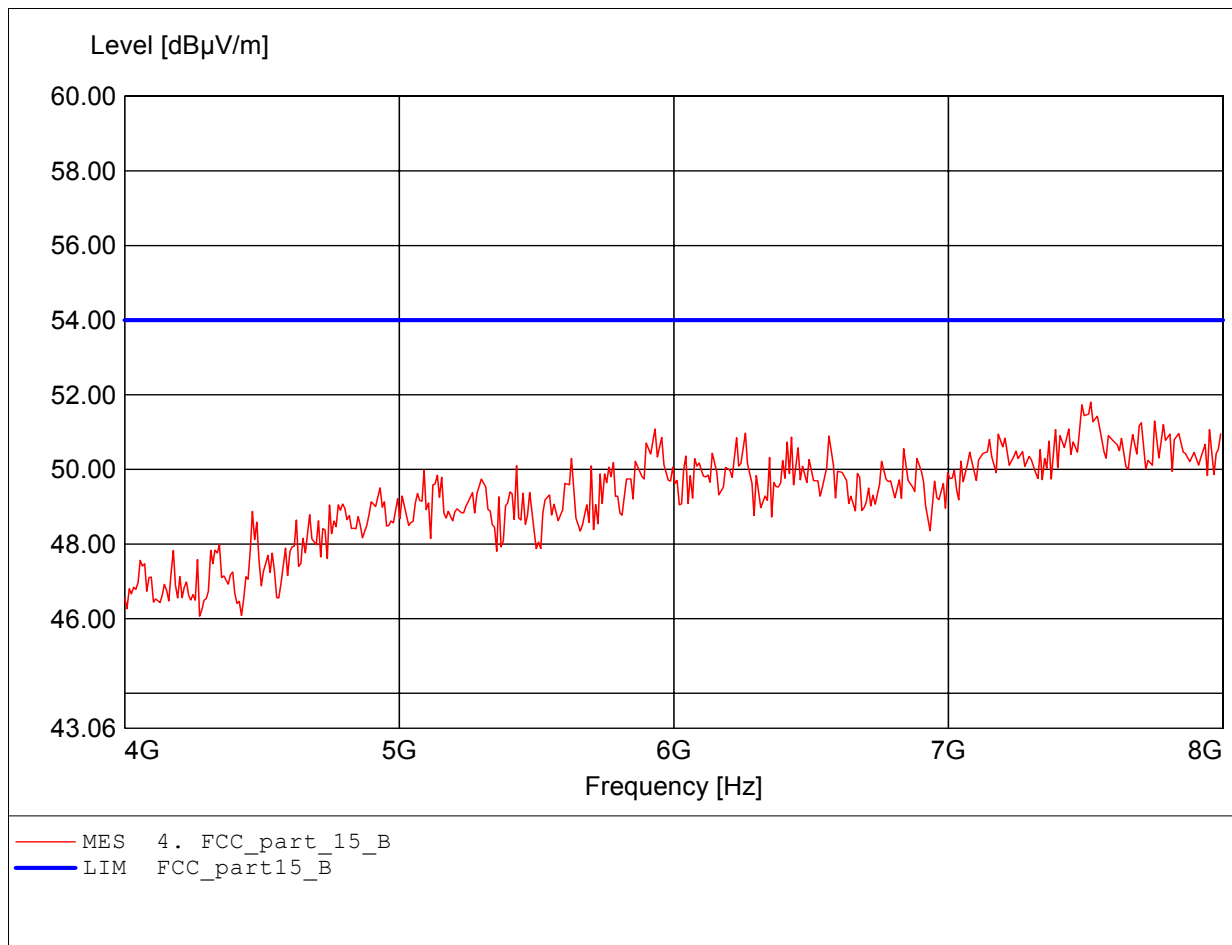

**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**

Order Number: W6M20606-7087 802.11b ch1  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:12.930GHz Emax:53.07dBµV/m RBW: 1 MHz

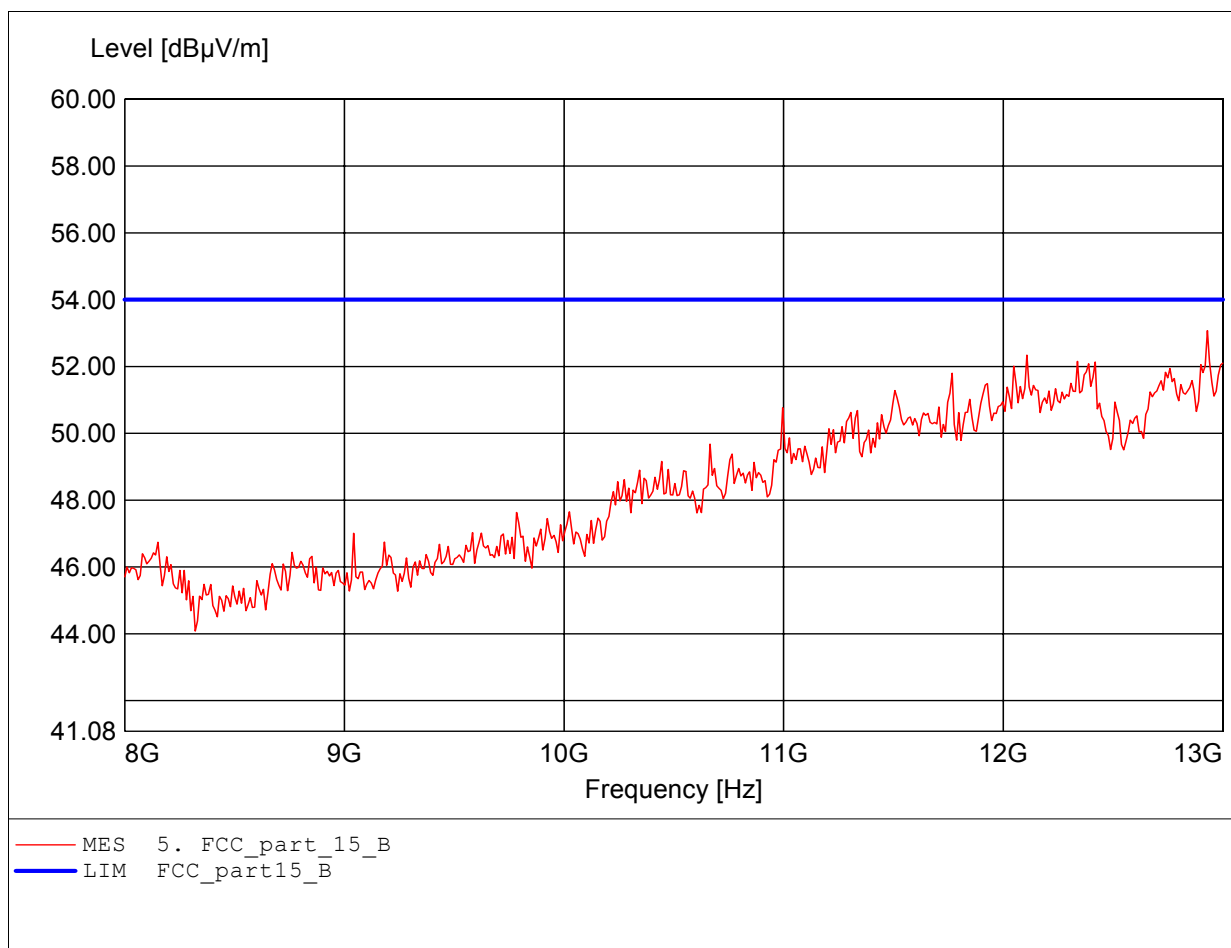




**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**


Order Number: W6M20606-7087 802.11b ch1  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:12.960GHz Emax:52.76dBµV/m RBW: 1 MHz

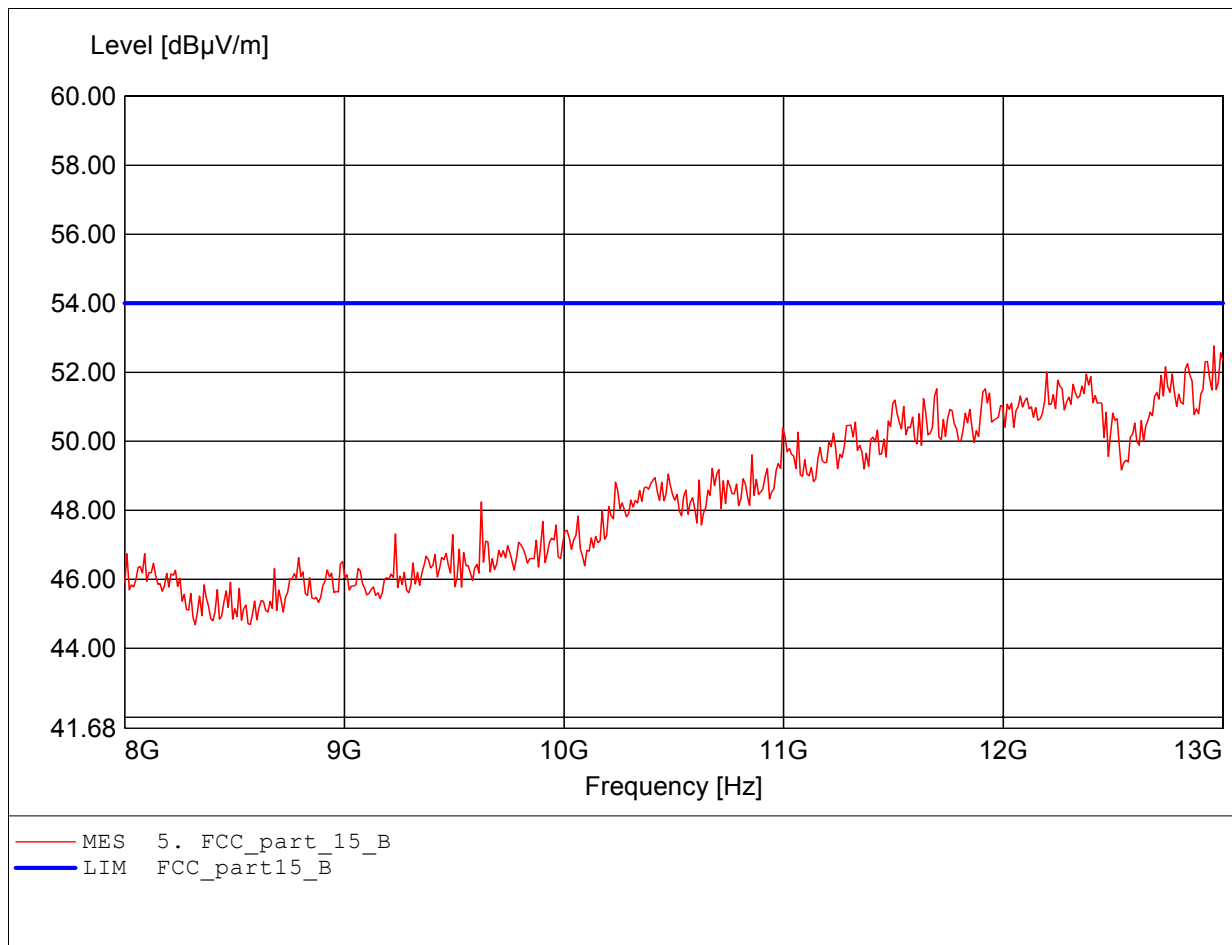

**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**


Order Number: W6M20606-7087 802.11b ch1  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:17.832GHz Emax:48.65dBµV/m RBW: 1 MHz

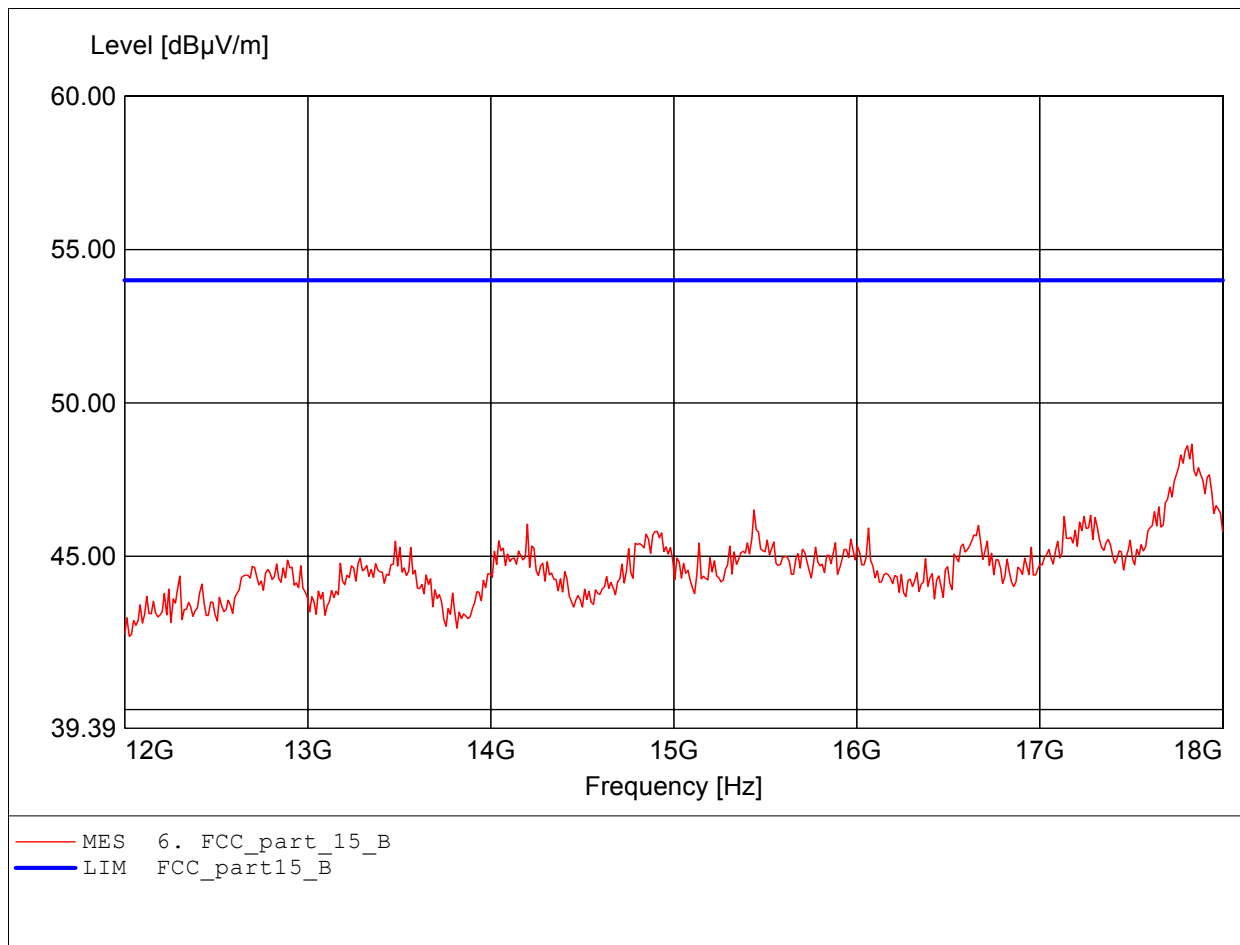

**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**


Order Number: W6M20606-7087 802.11b ch1  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:17.808GHz Emax:48.52dBμV/m RBW: 1 MHz

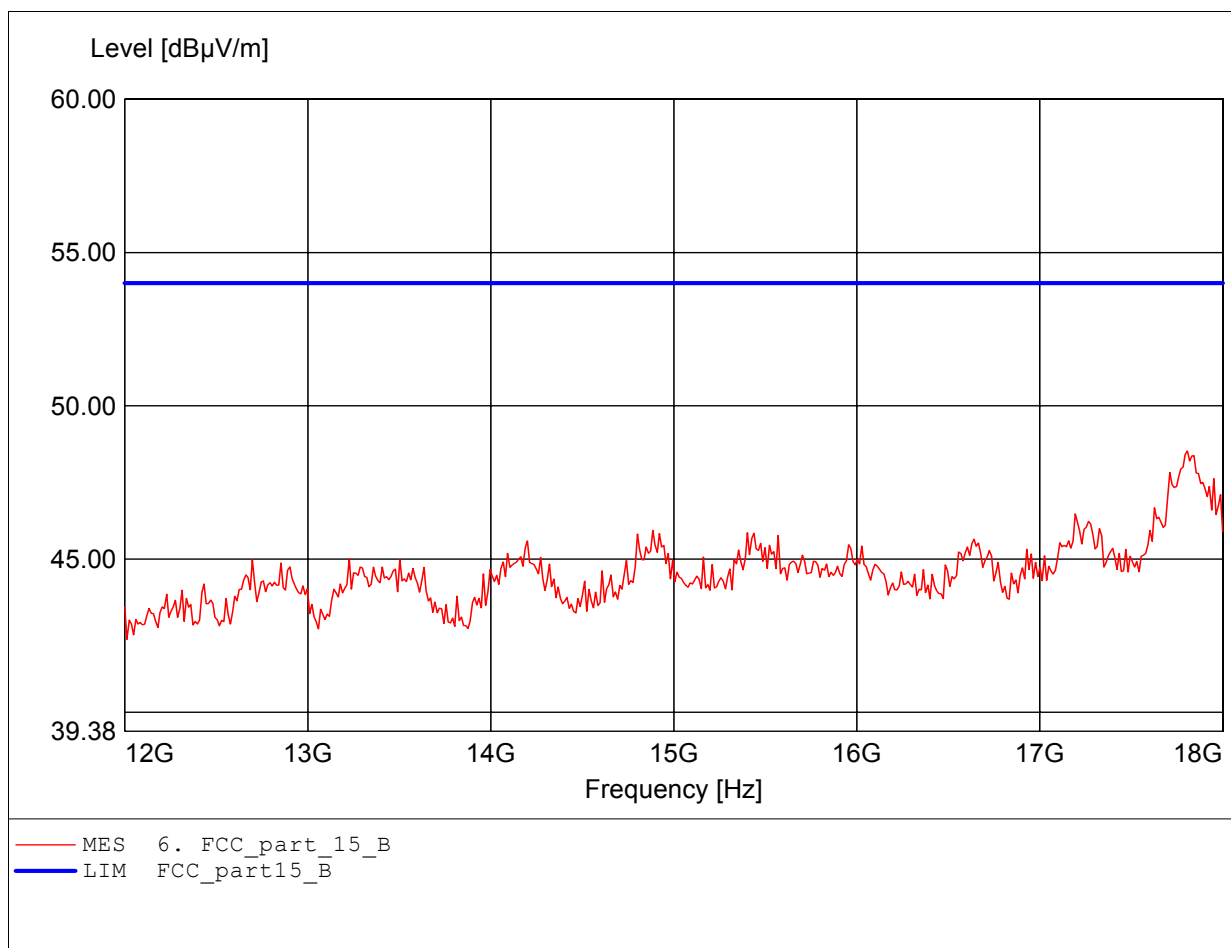

**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**


Order Number : W6M20606-7087  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HK 116  
Freq:49.419MHz Emax:30.54dBµV/m RBW: 100 kHz

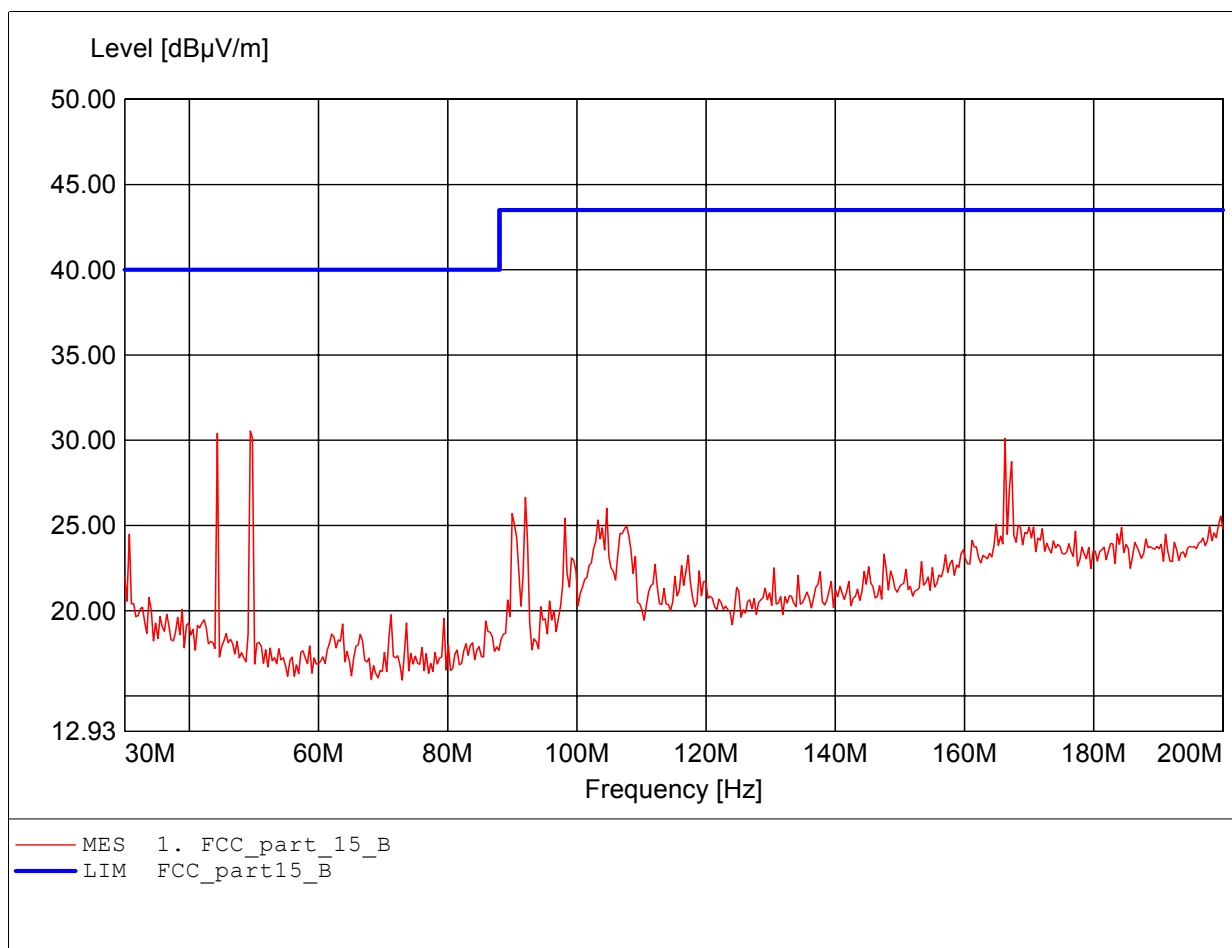

**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**


Order Number : W6M20606-7087  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HK 116  
Freq:166.613MHz Emax:34.23dBµV/m RBW: 100 kHz

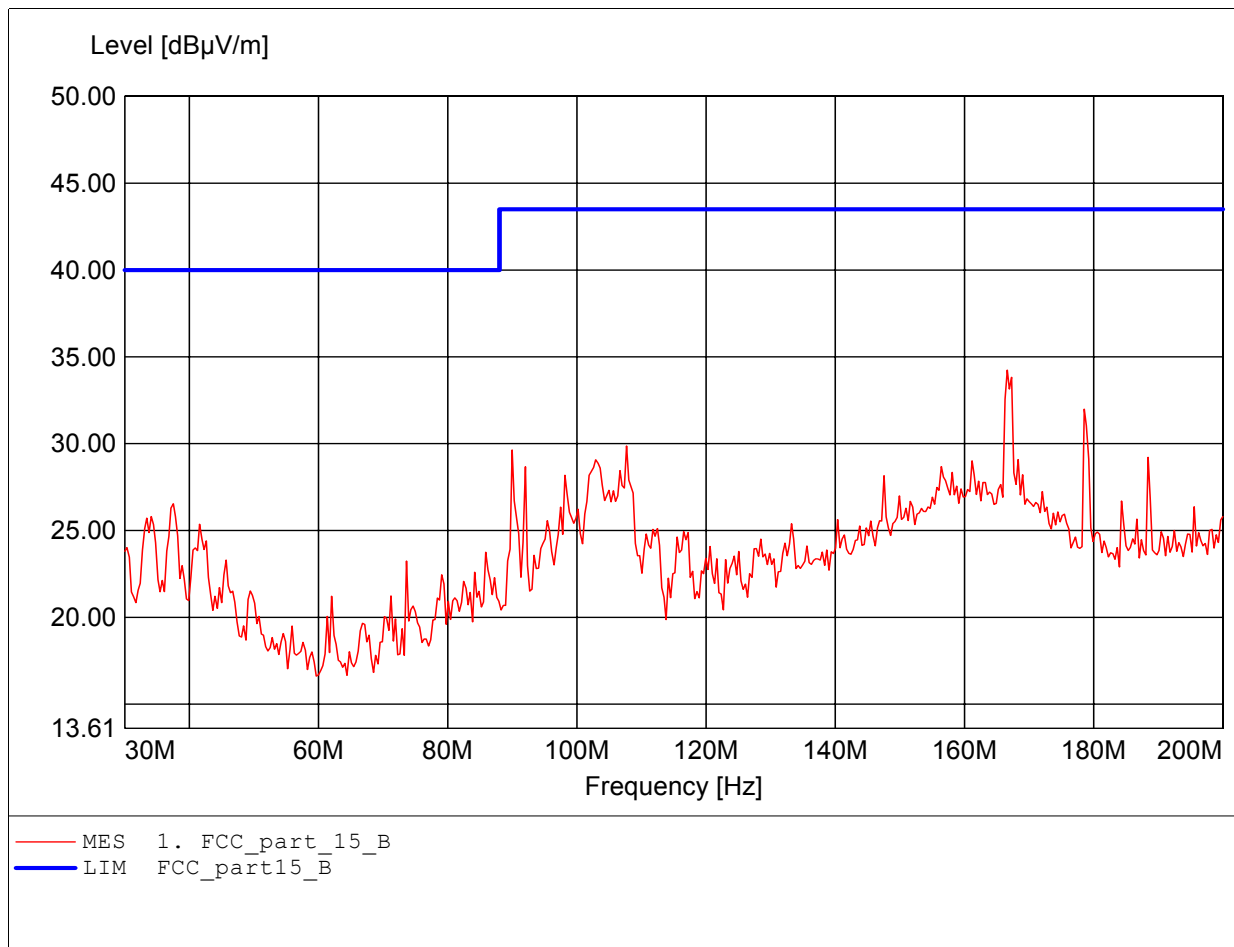

**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**


Order Number : W6M20606-7087  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.  
Freq:501.403MHz Emax:40.52dBμV/m RBW: 100 kHz

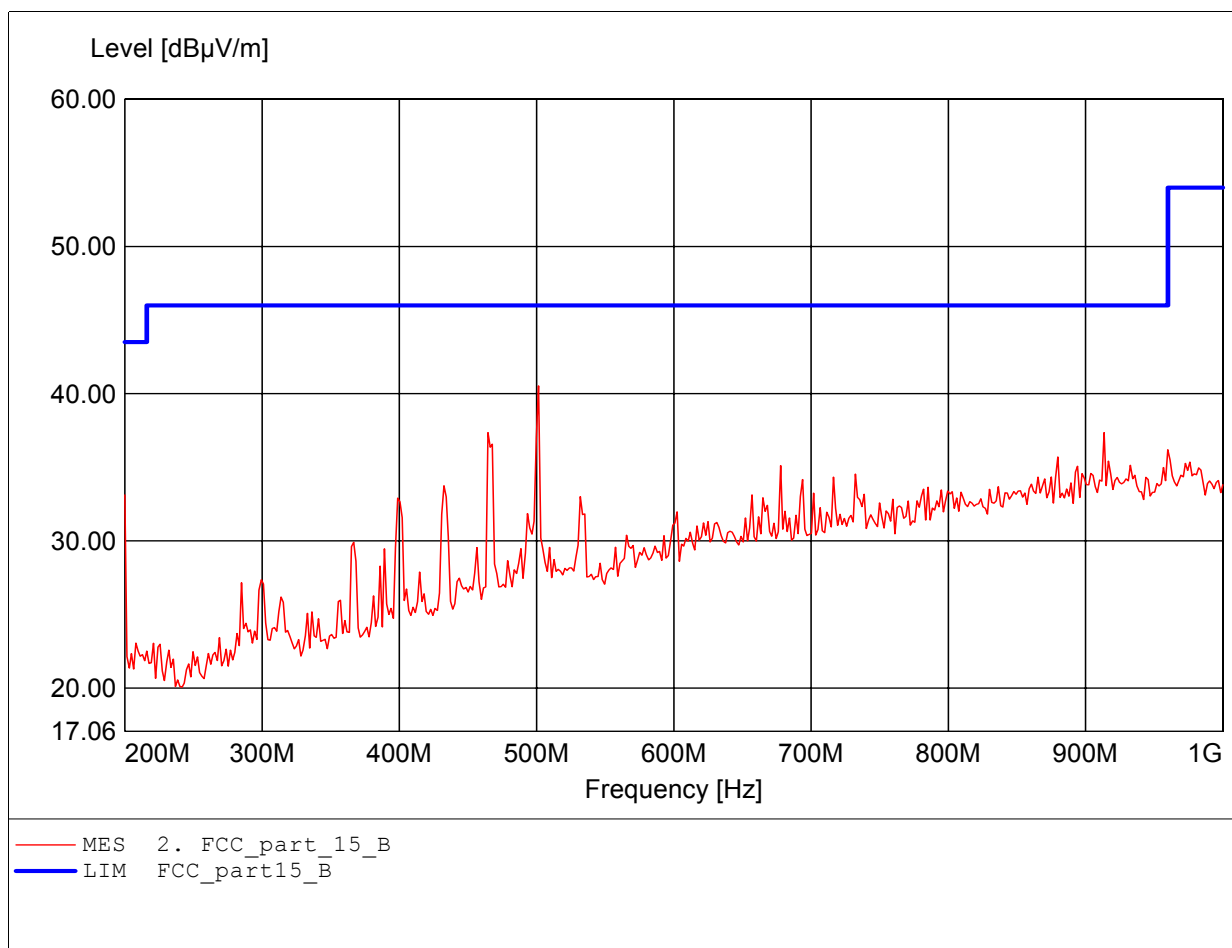

**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**


Order Number : W6M20606-7087  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.  
Freq:913.427MHz Emax:39.95dBµV/m RBW: 100 kHz

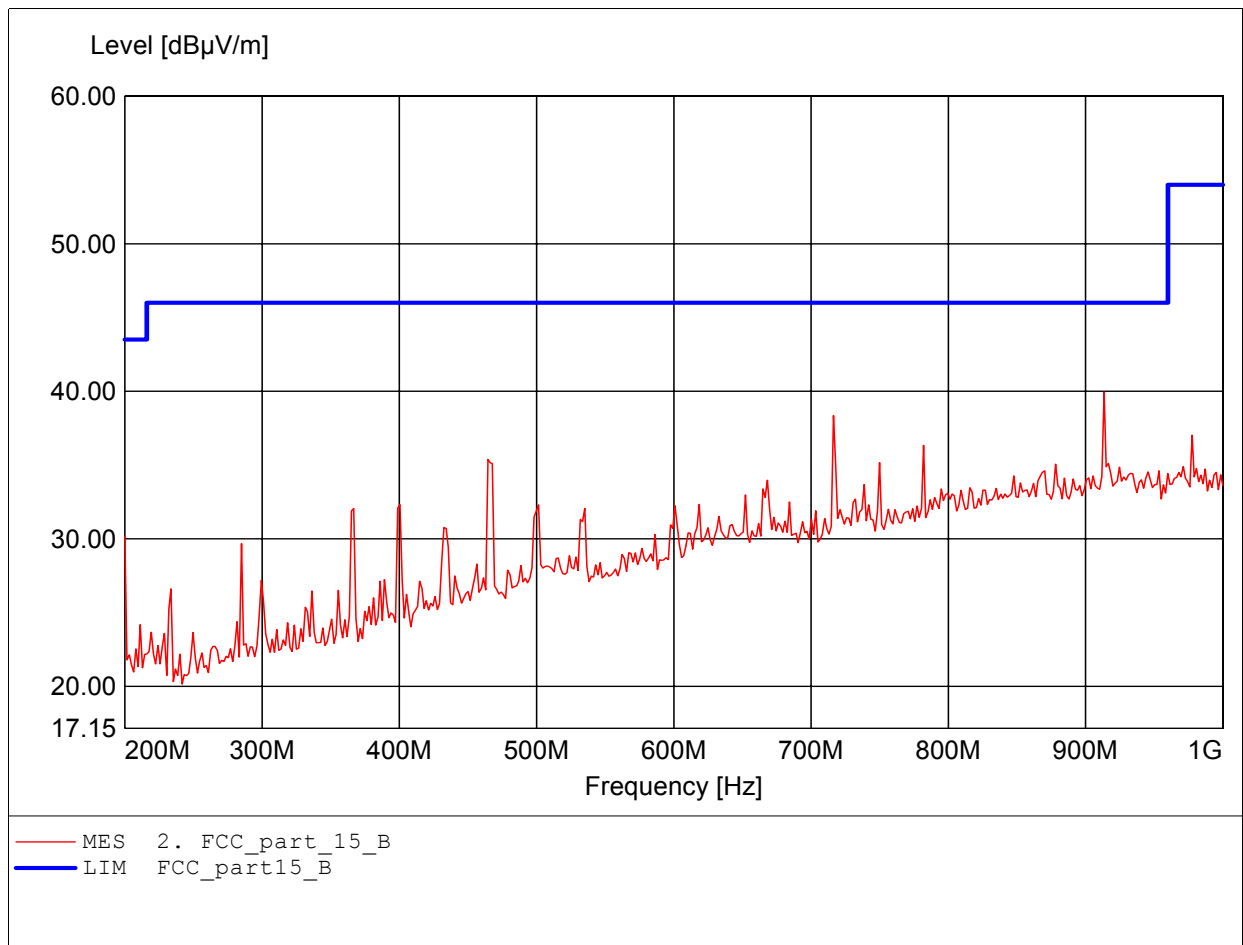

**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**

Order Number: W6M20606-7087 802.11b ch6  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:2.431GHz Emax:81.32dBµV/m RBW: 1 MHz

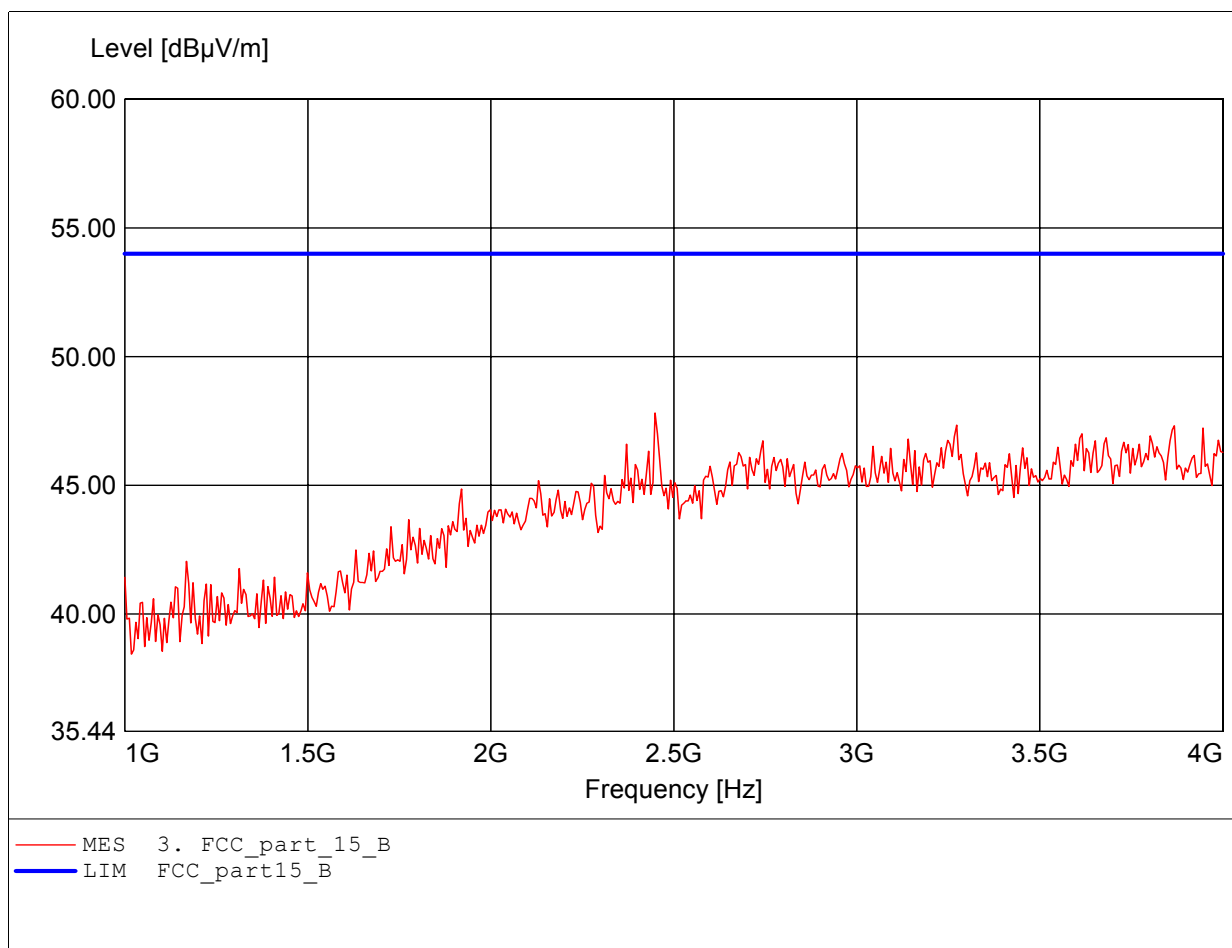




**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**


Order Number: W6M20606-7087 802.11b ch6  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:2.443GHz Emax:95.45dBμV/m RBW: 1 MHz

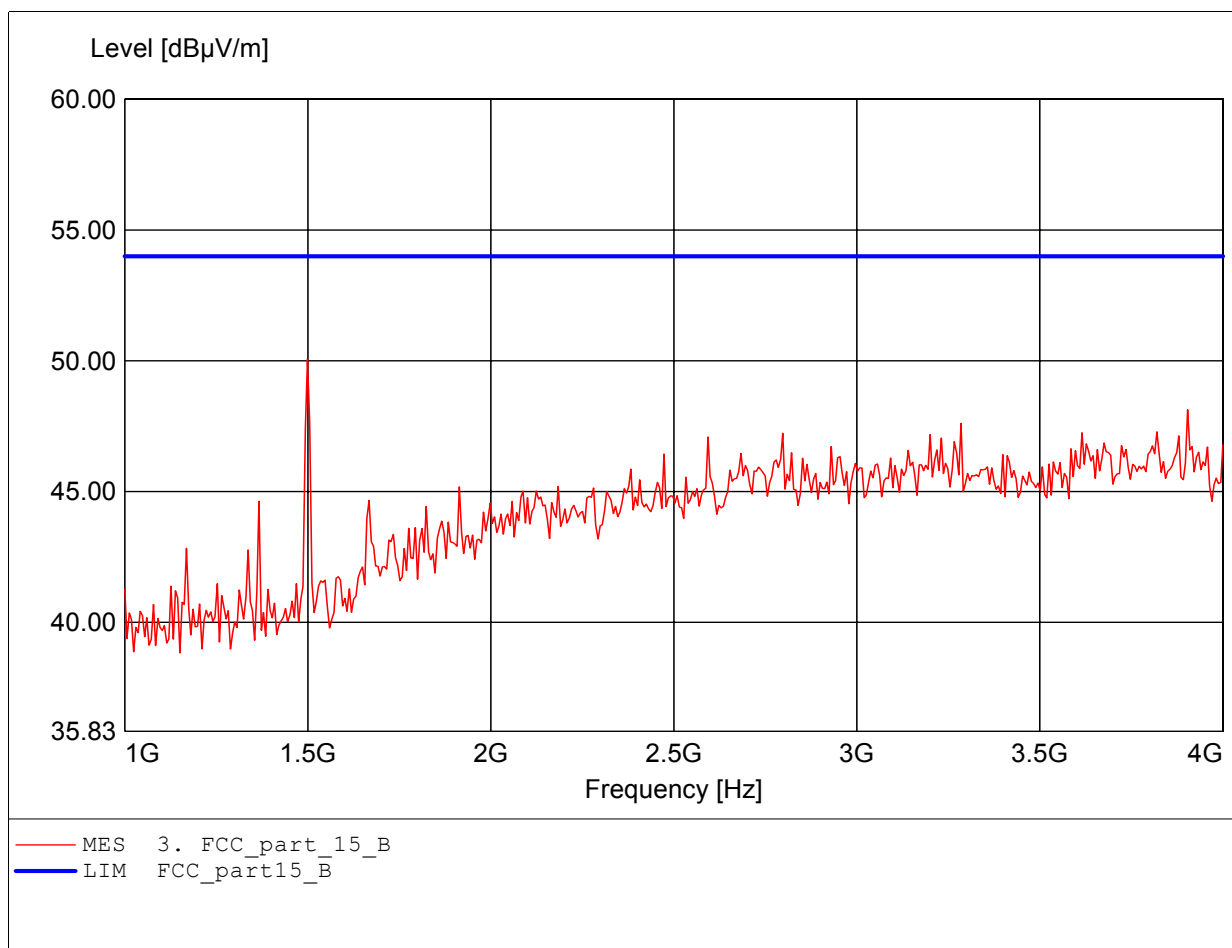

**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**


Order Number: W6M20606-7087 802.11b ch6  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:7.527GHz Emax:51.85dBµV/m RBW: 1 MHz

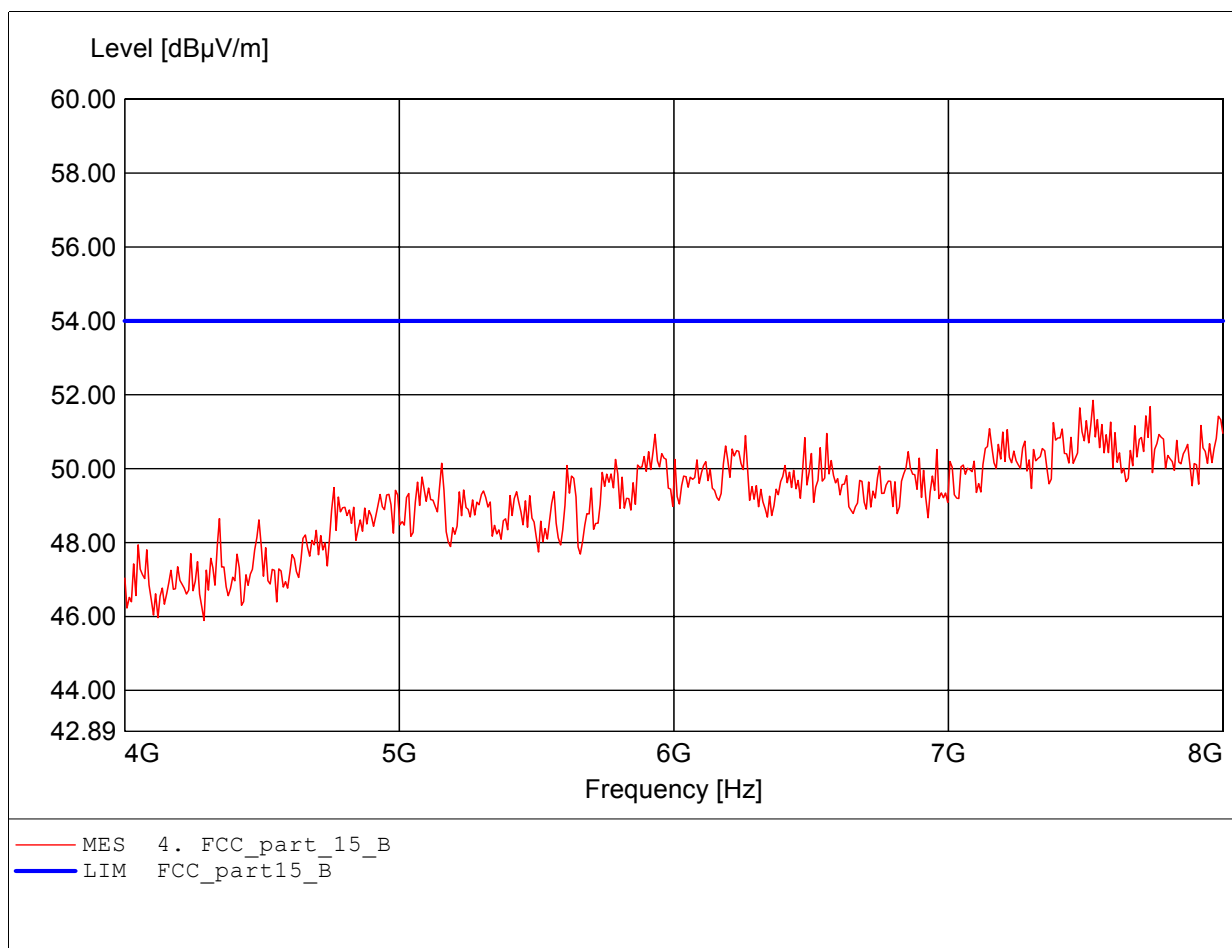

**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**


Order Number: W6M20606-7087 802.11b ch6  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:7.503GHz Emax:51.65dBµV/m RBW: 1 MHz

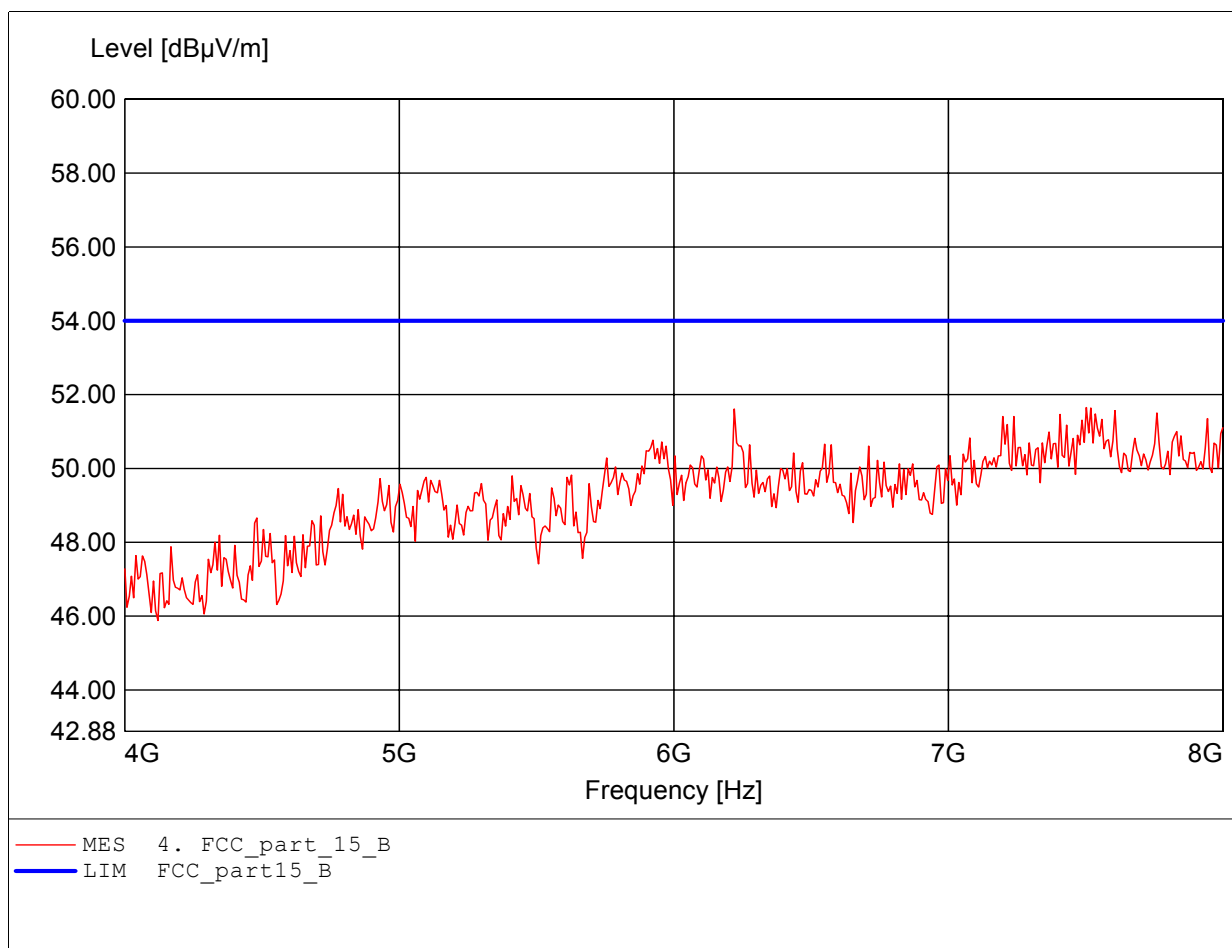

**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**


Order Number: W6M20606-7087 802.11b ch6  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:12.930GHz Emax:52.55dBµV/m RBW: 1 MHz

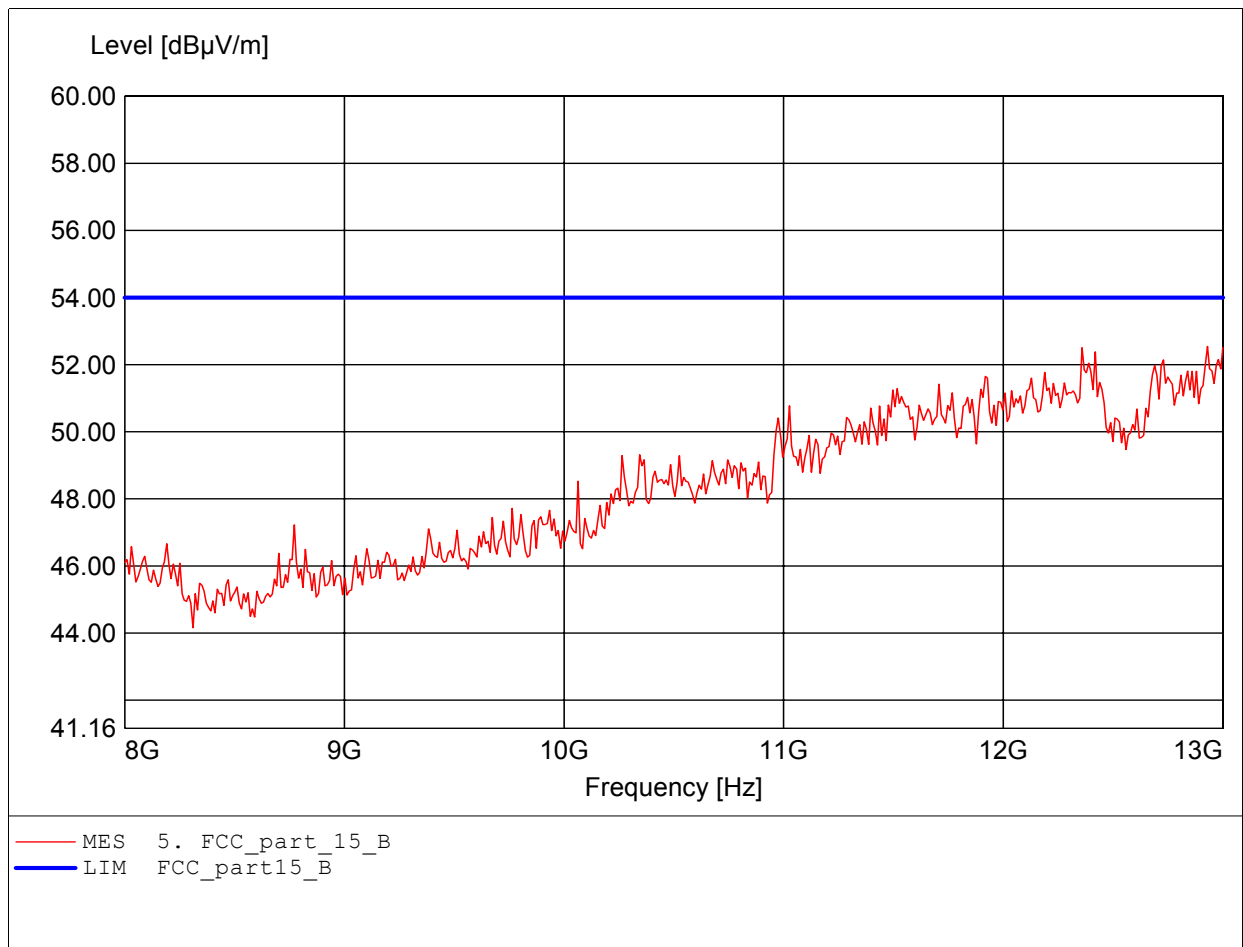

**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**


Order Number: W6M20606-7087 802.11b ch6  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:13.000GHz Emax:52.40dBµV/m RBW: 1 MHz

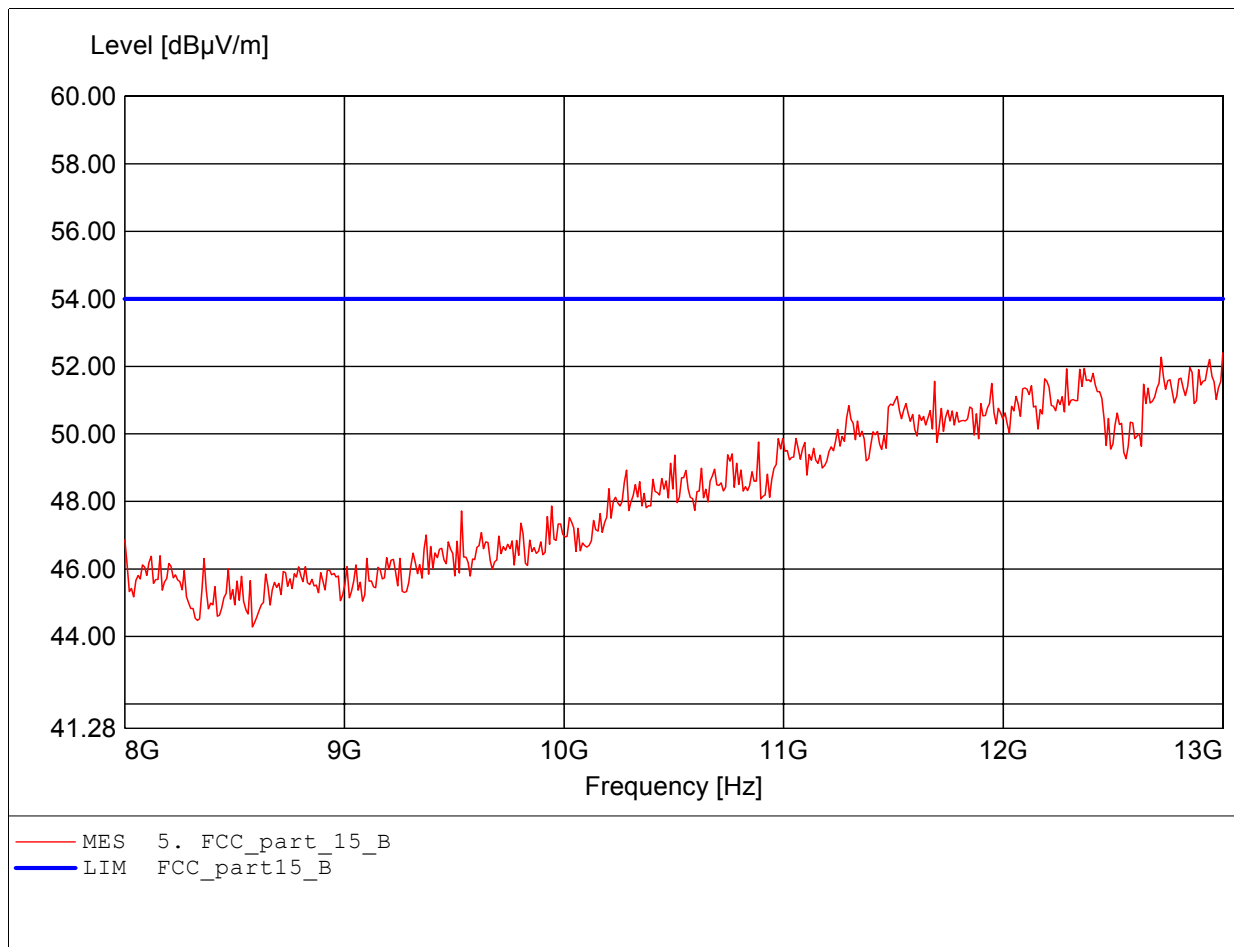

**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**


Order Number: W6M20606-7087 802.11b ch6  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:17.832GHz Emax:52.48dBµV/m RBW: 1 MHz

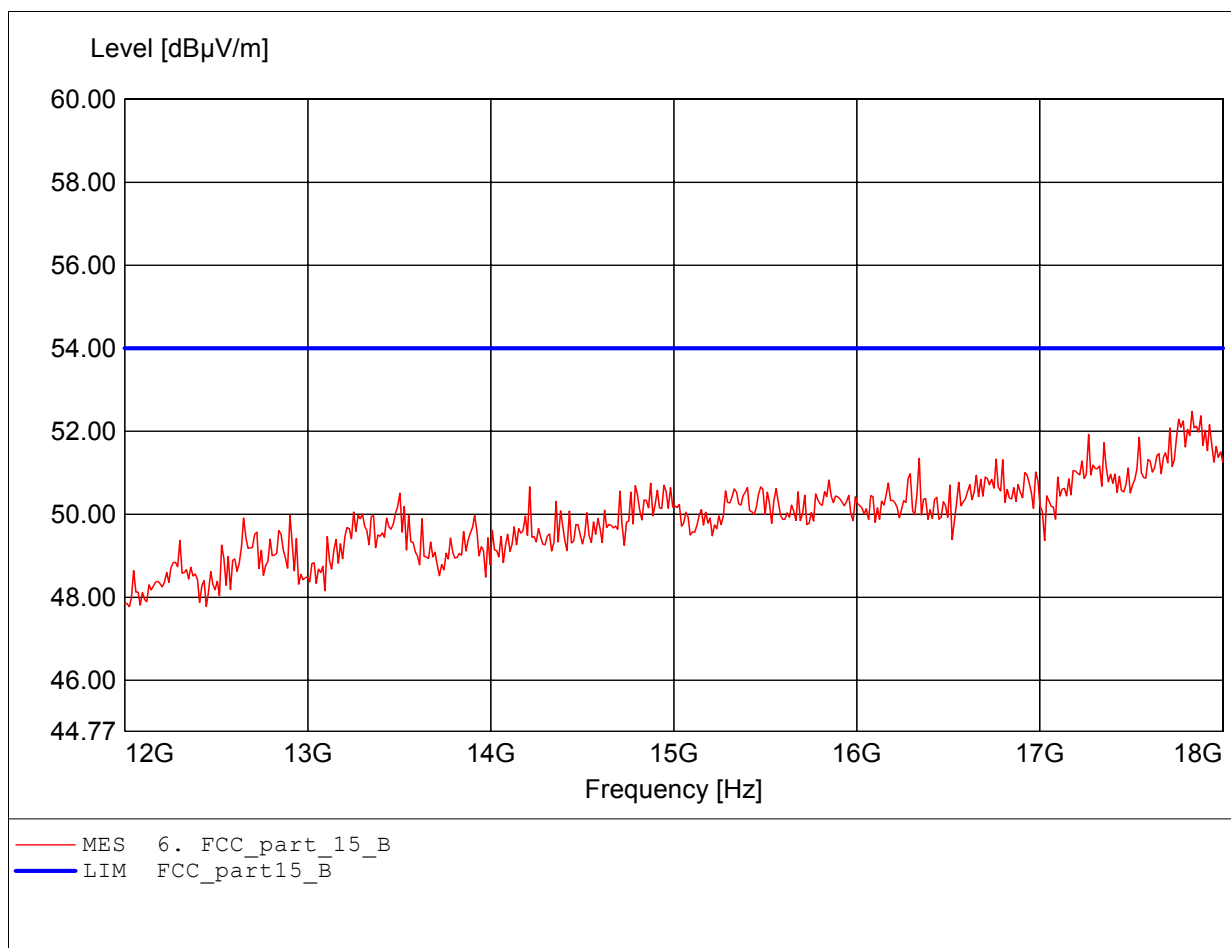

**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**


Order Number: W6M20606-7087 802.11b ch6  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:17.820GHz Emax:52.92dBµV/m RBW: 1 MHz

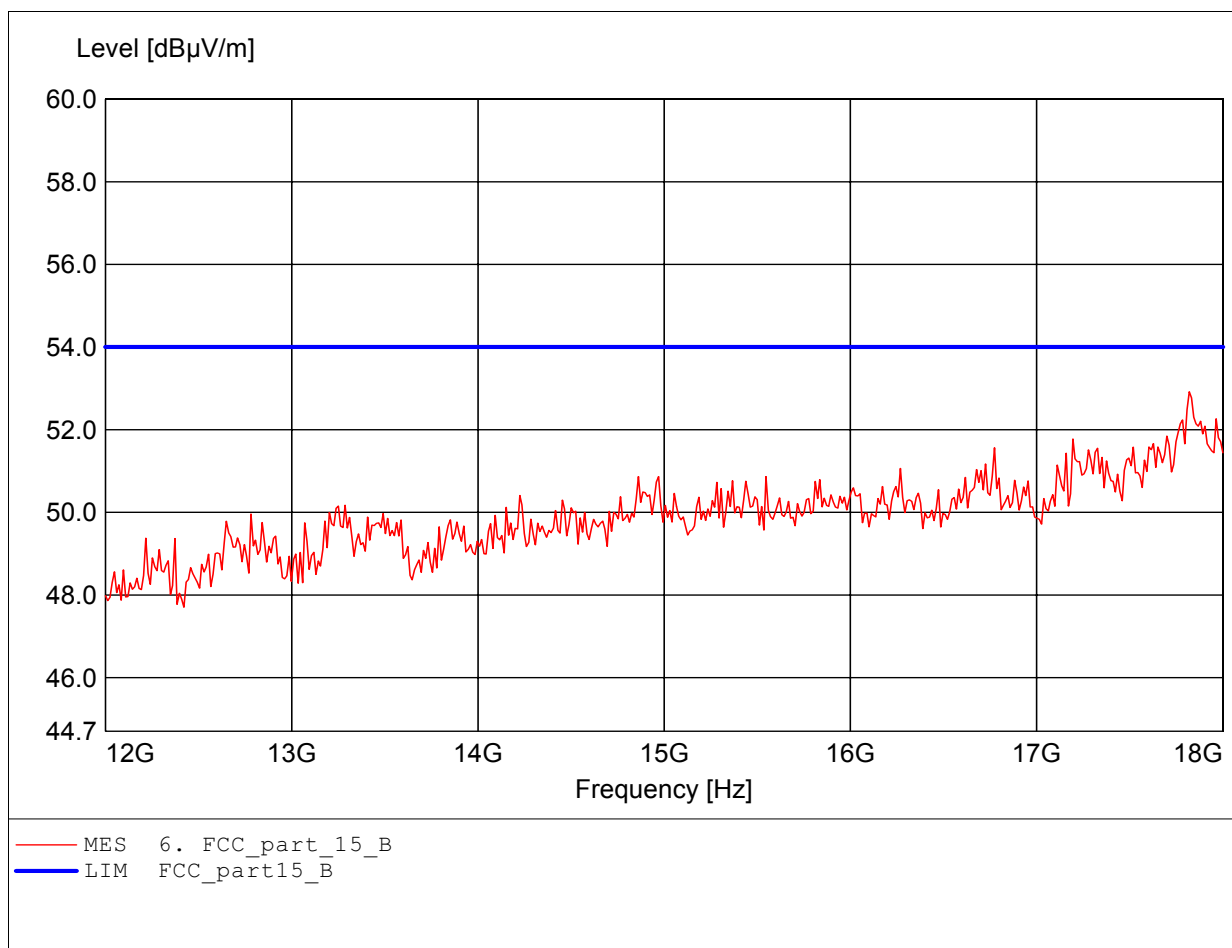

**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**

Order Number : W6M20606-7087  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HK 116  
Freq:49.419MHz Emax:30.54dBµV/m RBW: 100 kHz

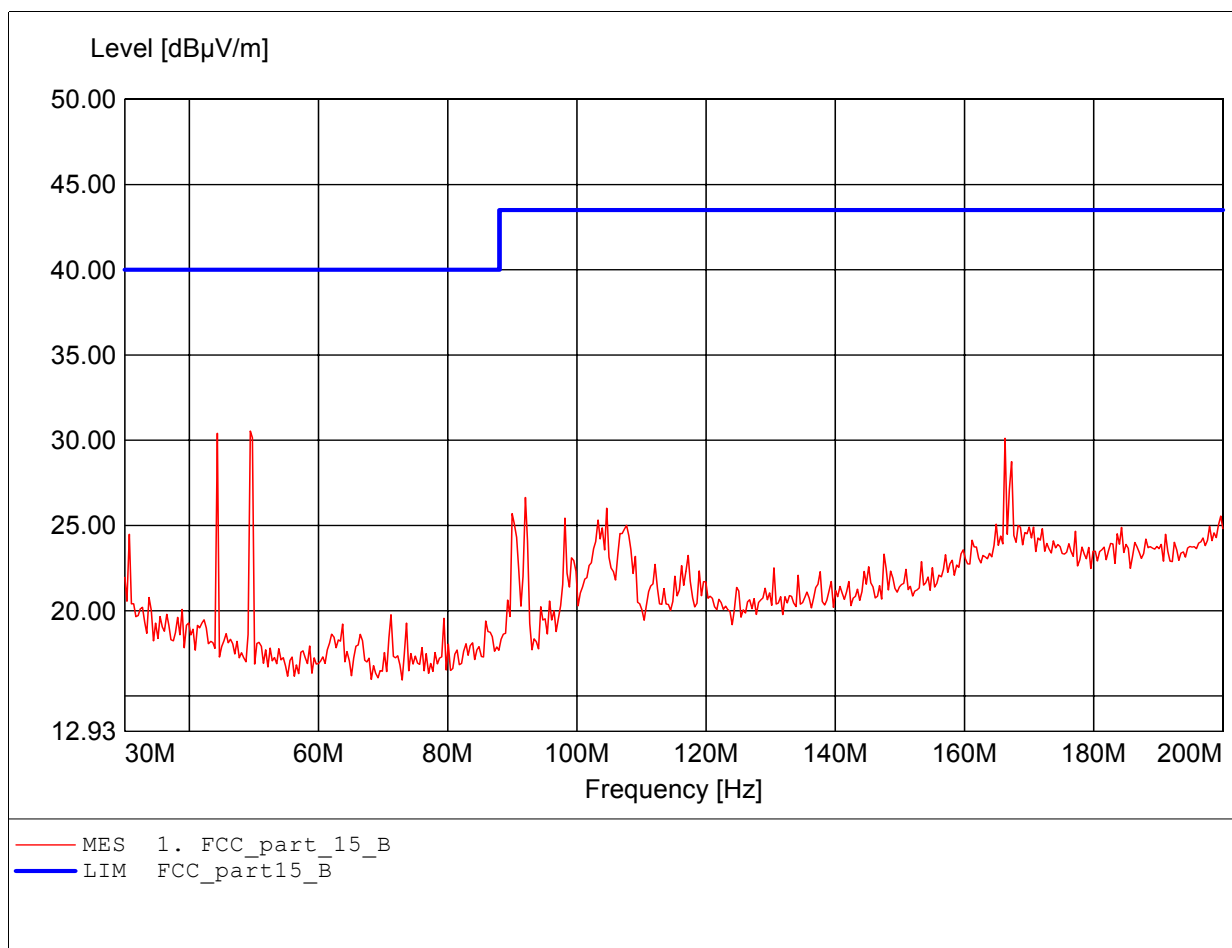




**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**


Order Number : W6M20606-7087  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HK 116  
Freq:166.613MHz Emax:34.23dBµV/m RBW: 100 kHz

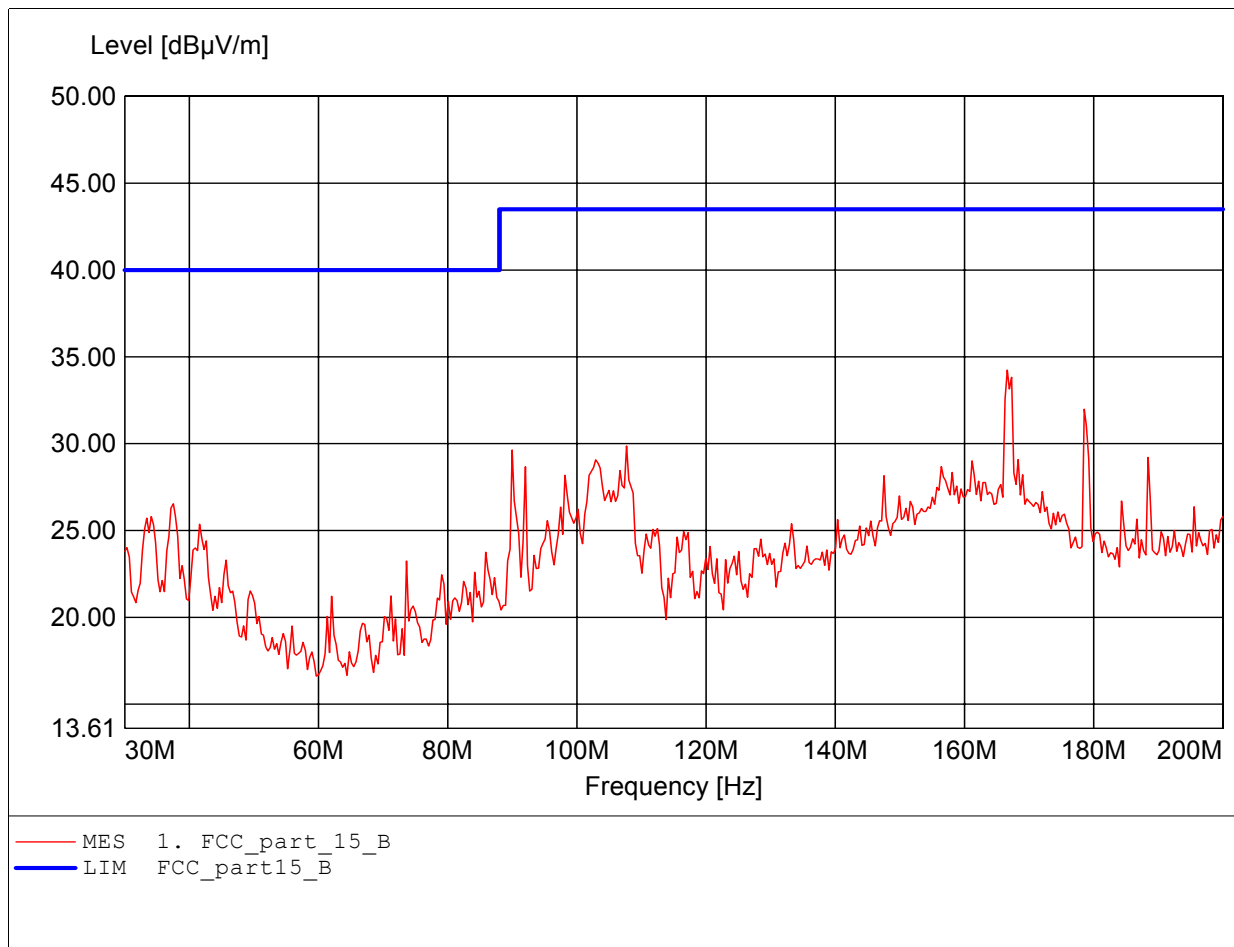

**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**


Order Number : W6M20606-7087  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.  
Freq:501.403MHz Emax:40.52dBµV/m RBW: 100 kHz

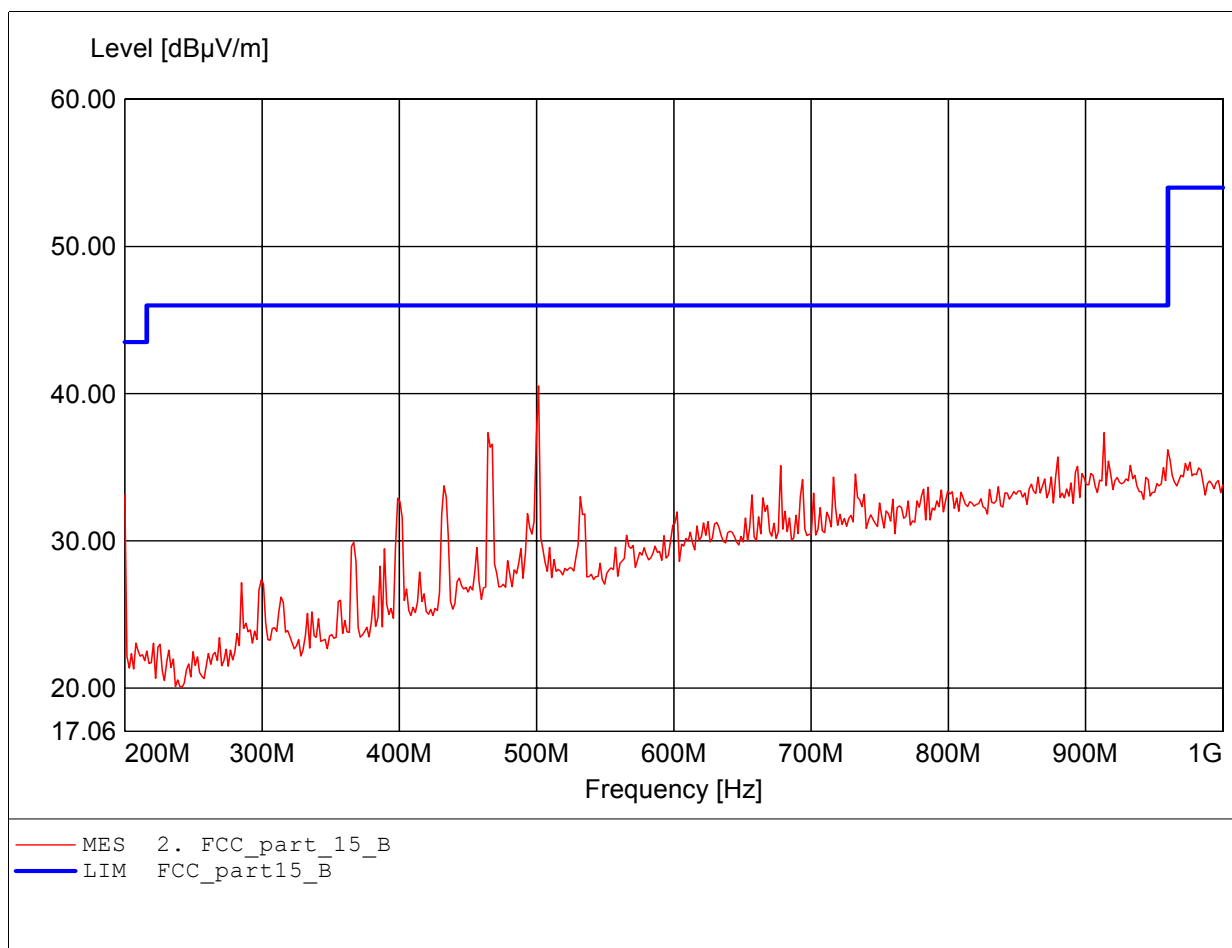

**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**


Order Number : W6M20606-7087  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.  
Freq:913.427MHz Emax:39.95dBµV/m RBW: 100 kHz

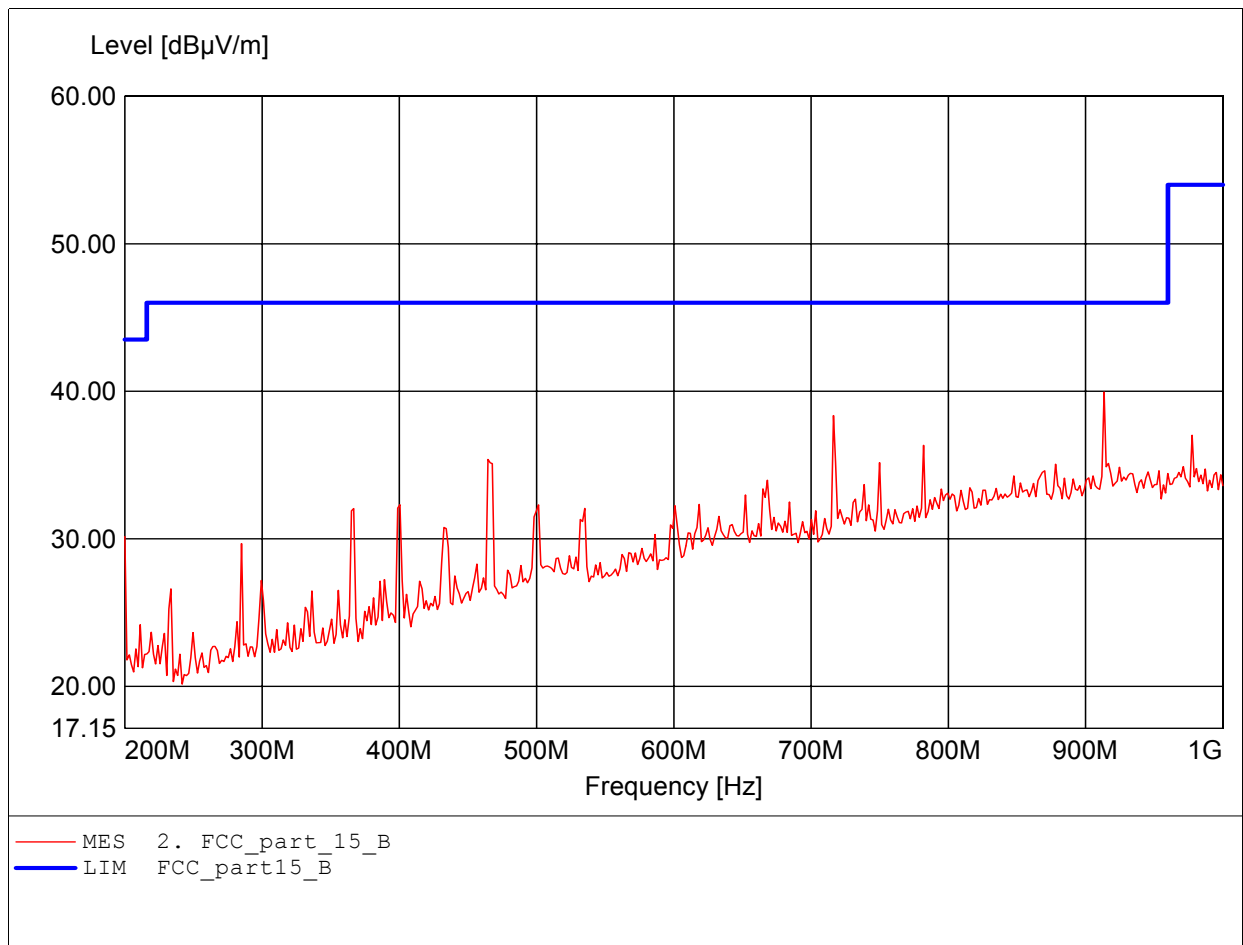

**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**


Order Number: W6M20606-7087 802.11b ch11  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:3.285GHz Emax:48.29dBµV/m RBW: 1 MHz

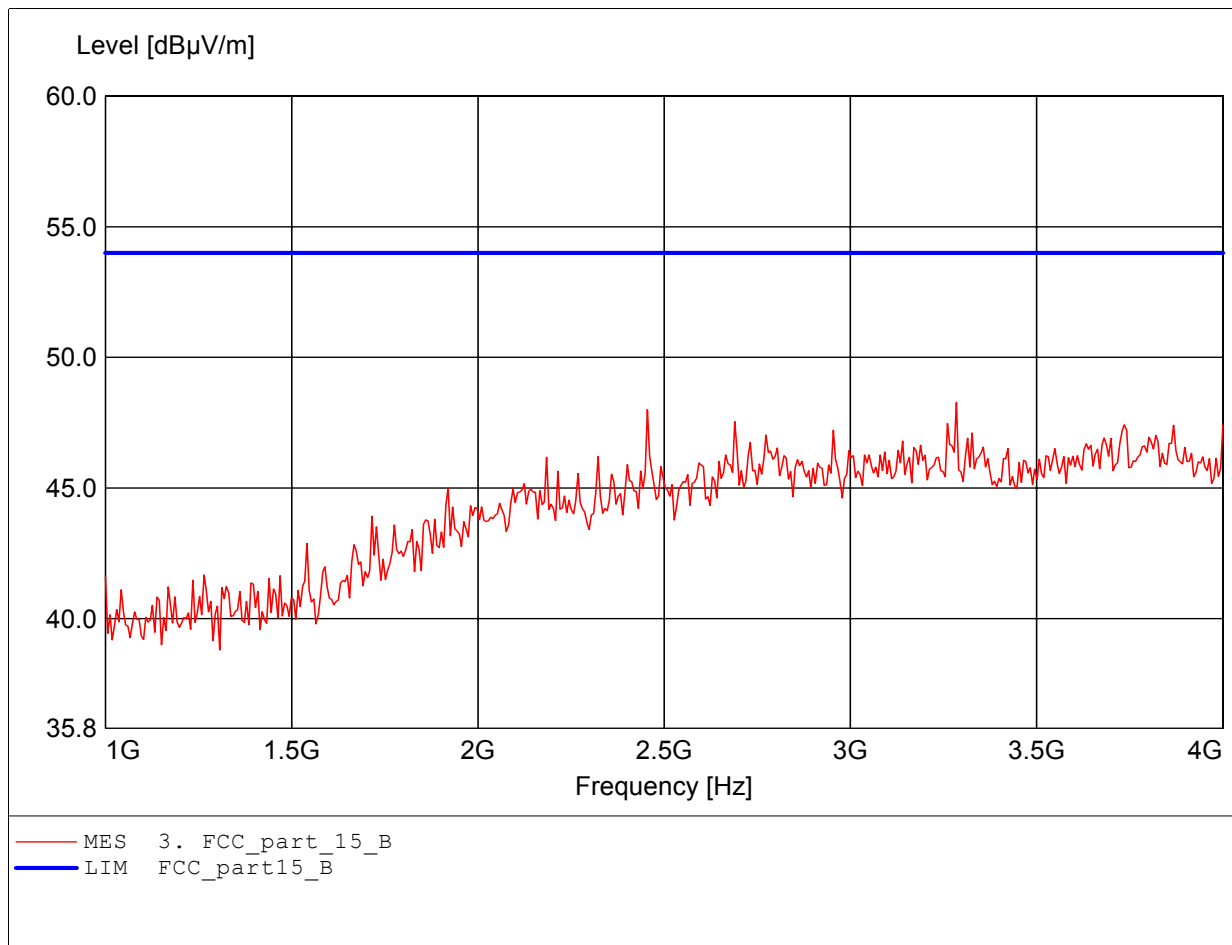

**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**


Order Number: W6M20606-7087 802.11b ch11  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:2.431GHz Emax:49.17dBµV/m RBW: 1 MHz

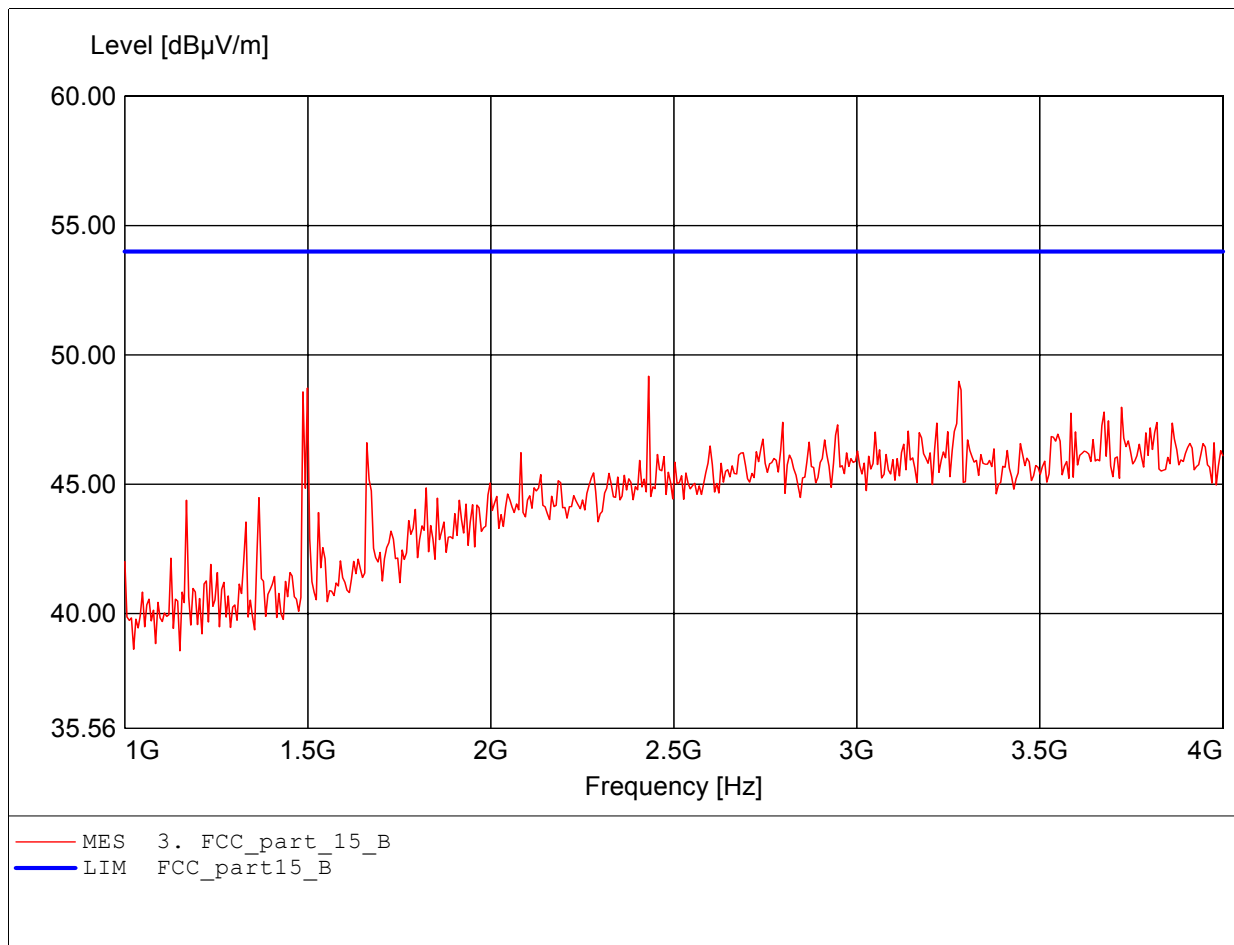

**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**


Order Number: W6M20606-7087 802.11b ch11  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:7.479GHz Emax:52.12dBμV/m RBW: 1 MHz

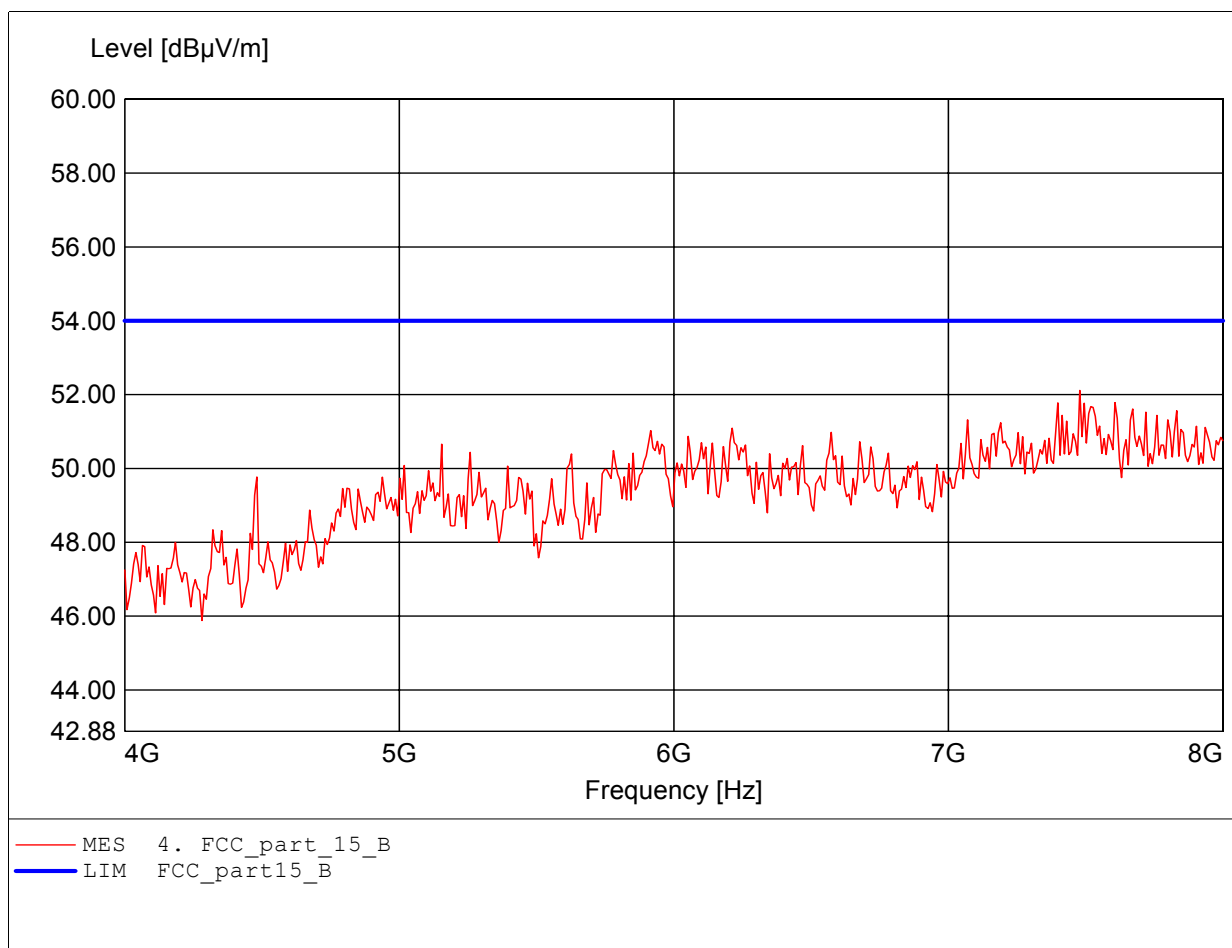

**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**


Order Number: W6M20606-7087 802.11b ch11  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:7.503GHz Emax:51.75dBµV/m RBW: 1 MHz

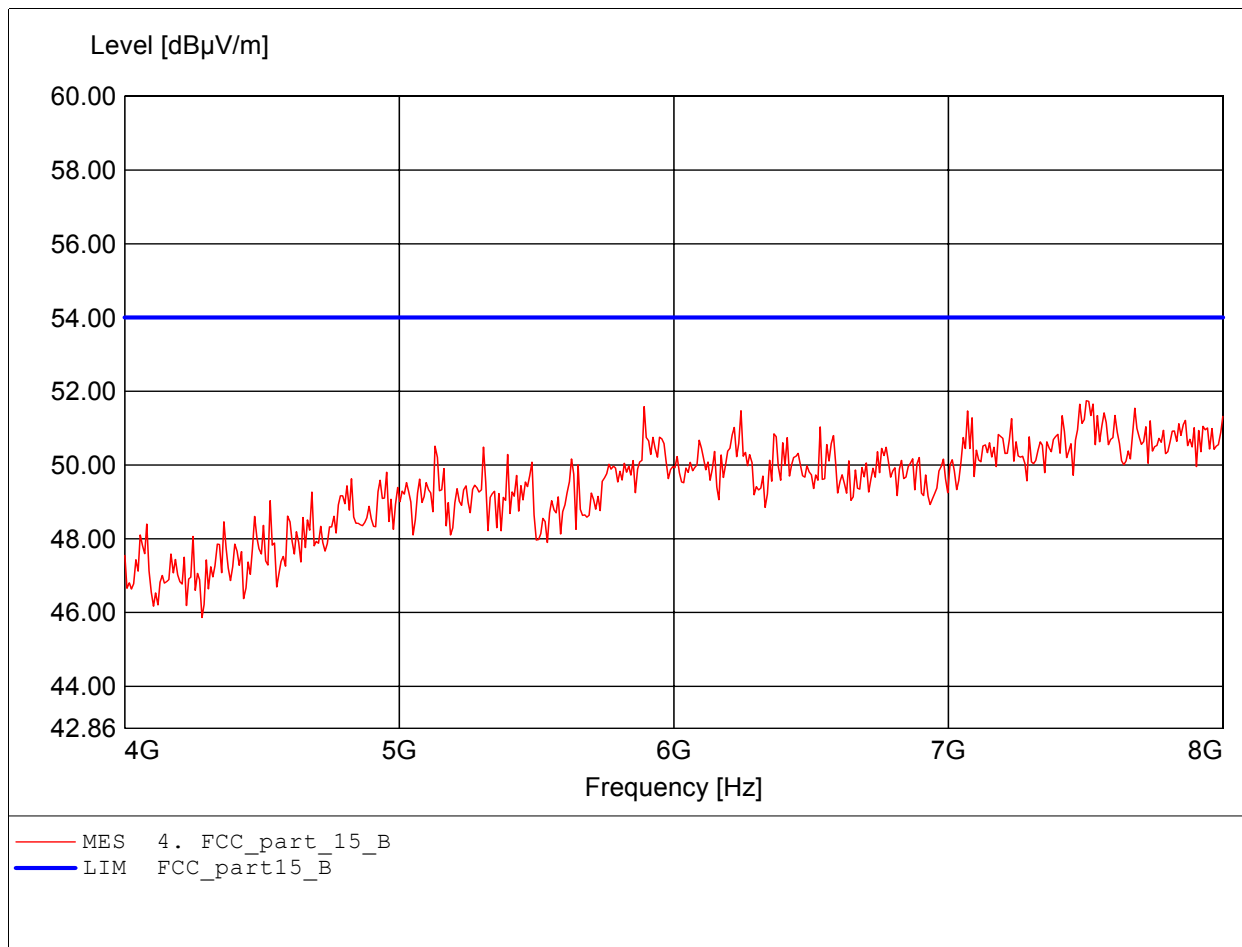

**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**

Order Number: W6M20606-7087 802.11b ch11  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:12.930GHz Emax:53.19dBµV/m RBW: 1 MHz

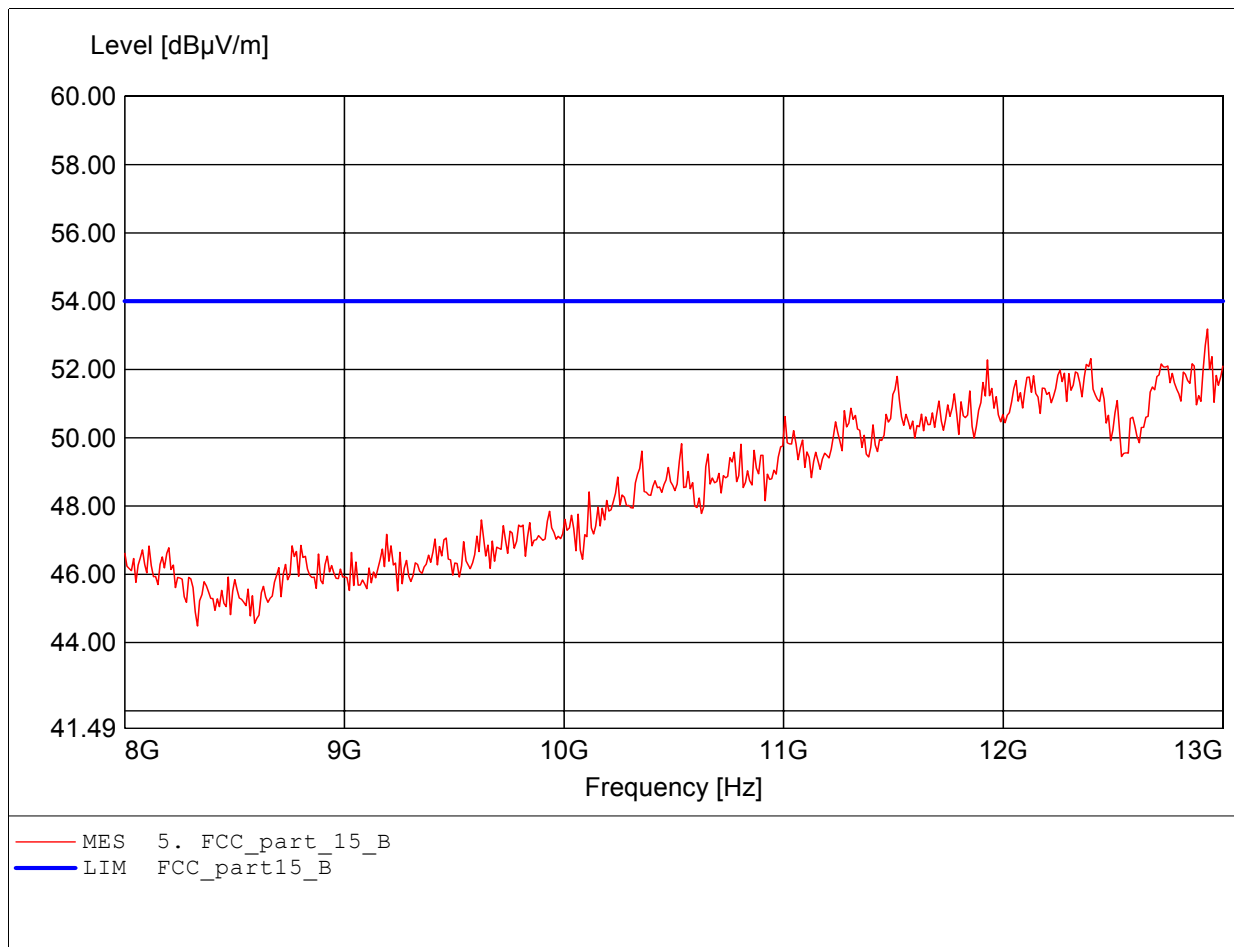




**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**


Order Number: W6M20606-7087 802.11b ch11  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:12.790GHz Emax:52.97dBµV/m RBW: 1 MHz

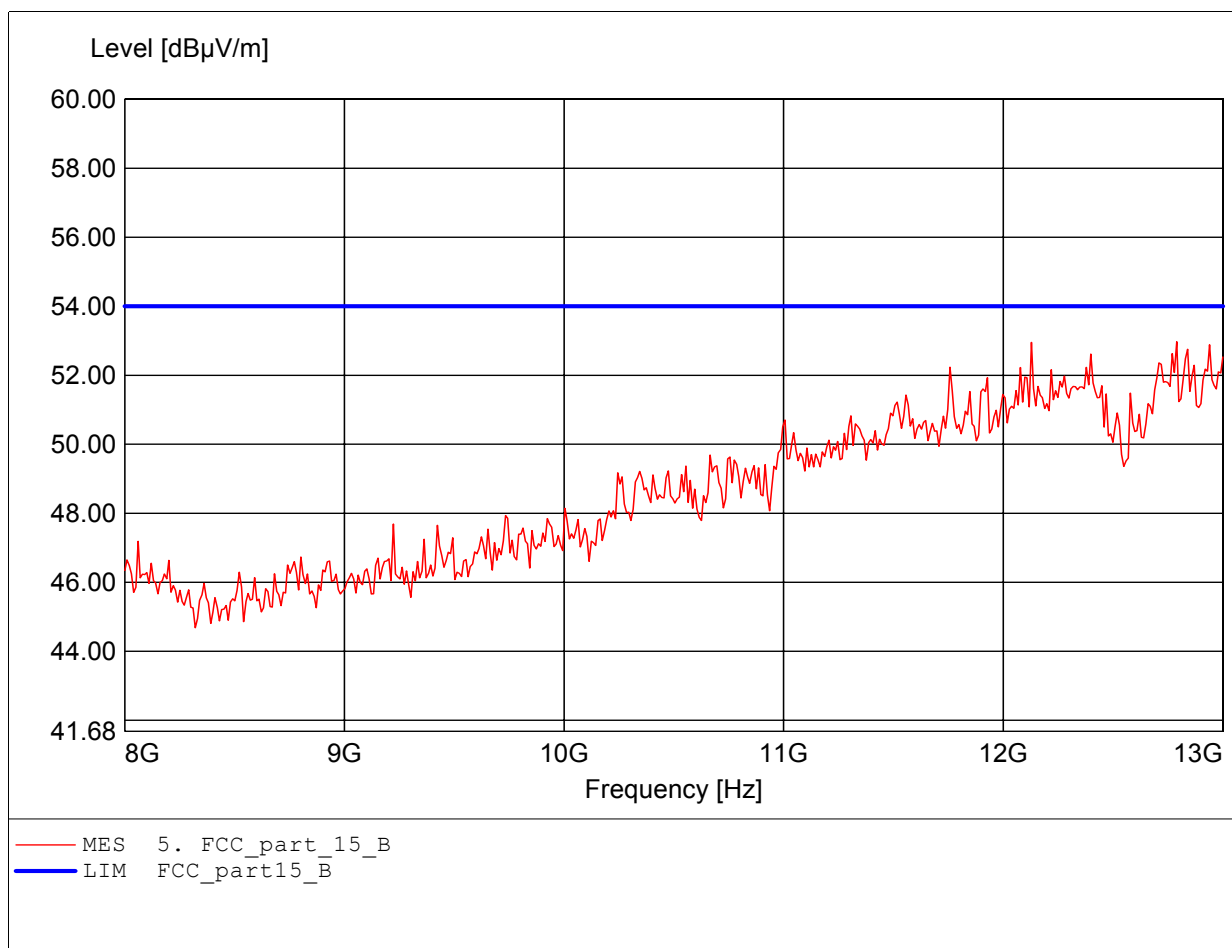

**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**


Order Number: W6M20606-7087 802.11b ch11  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:17.844GHz Emax:52.49dBµV/m RBW: 1 MHz

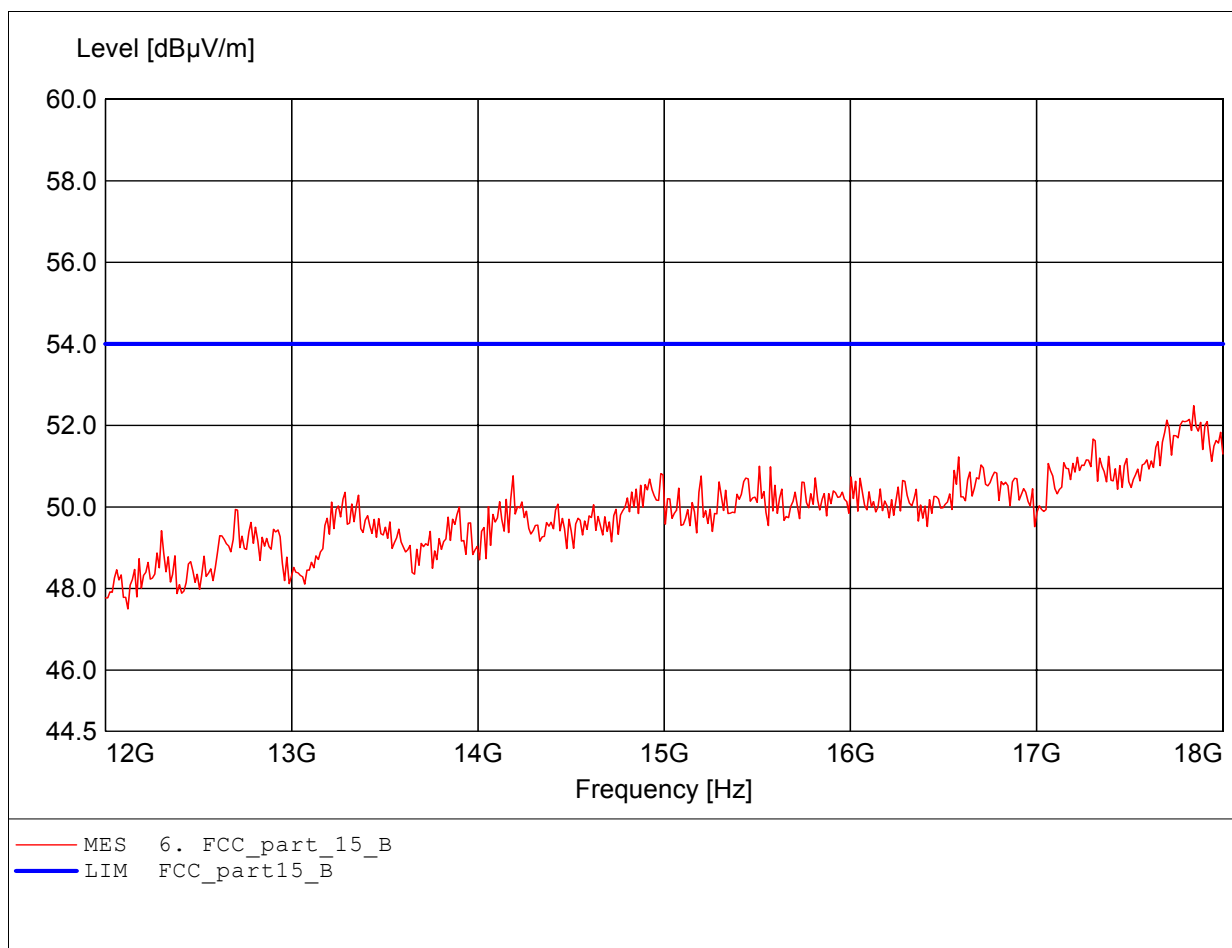

**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**

Order Number: W6M20606-7087 802.11b ch11  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23.9°C/ Unom.: 120 VAC ( power on pc )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:17.747GHz Emax:52.68dBµV/m RBW: 1 MHz

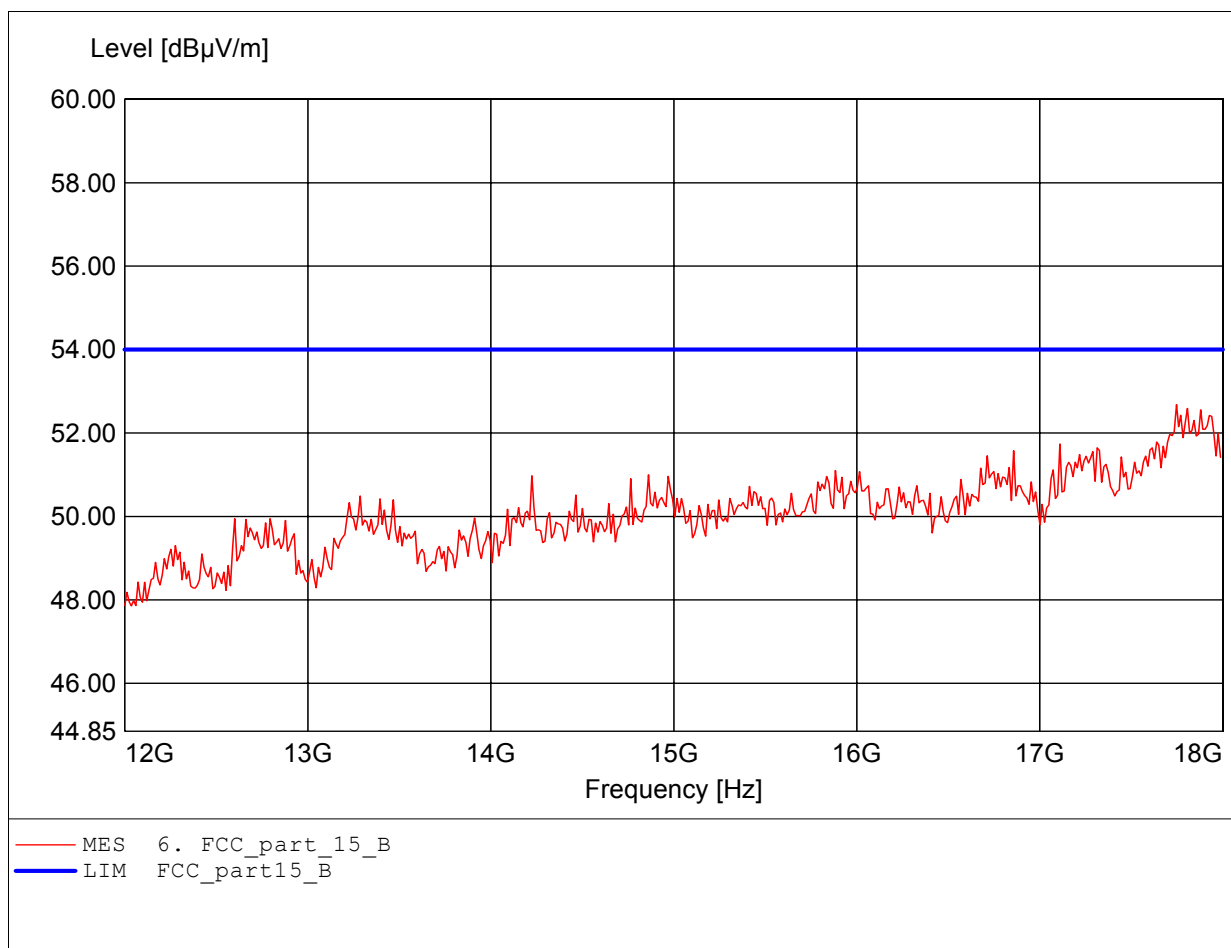



Registration number: W6M20606-7087-C-1  
FCC ID: RXZ-WU61RL

## **Appendix G**


### Power Line Conducted Emission

**The measurement diagram are wideband pre-scan results; only for reference.**

# EMI voltage test in the ac-mains according to FCC Part 15

## Class B


Order Number:: W6M20606-7087  
Operating Condition: Unom: 120VAC(power on pc) , Tnom: 23.9°C  
Test Site: ETS  
Operator: Dennis  
Test Specification: V-network: WU61RL N

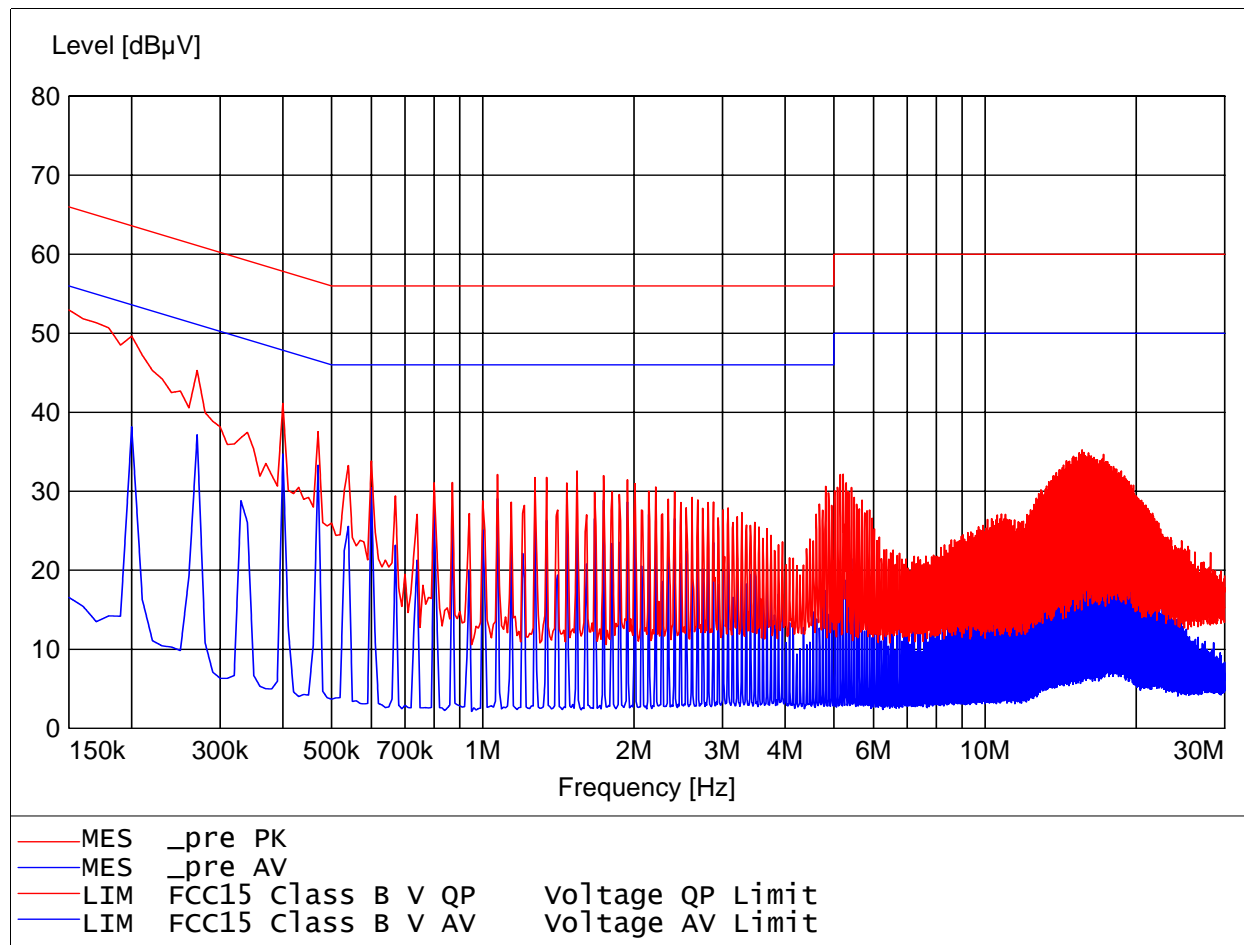


# EMI voltage test in the ac-mains according to FCC Part 15

## Class B

Order Number:: W6M20606-7087  
Operating Condition: Unom: 120VAC(power on pc) , Tnom: 23.9°C  
Test Site: ETS  
Operator: Dennis  
Test Specification: V-network: WU61RL L1

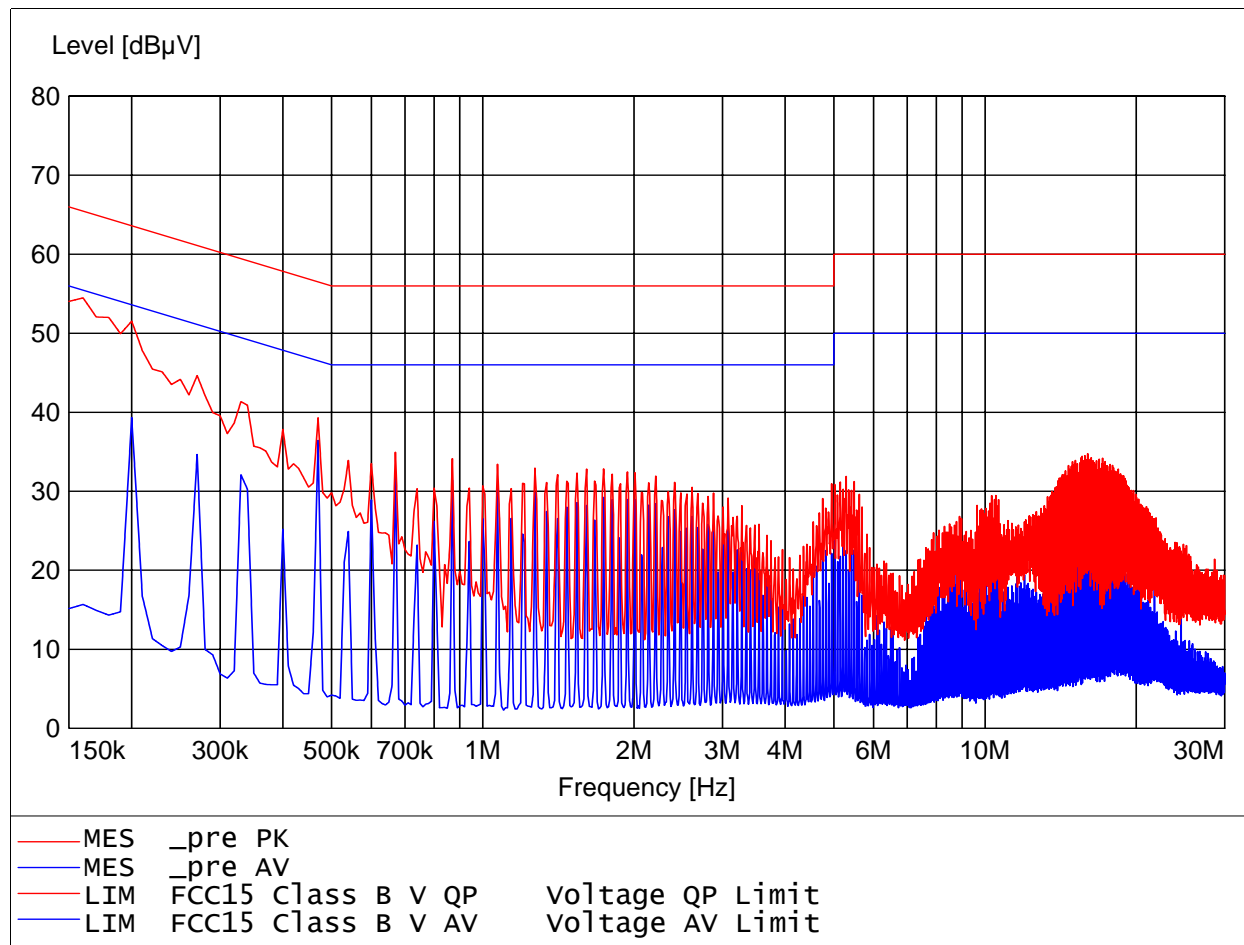



Registration number: W6M20606-7087-C-1  
FCC ID: RXZ-WU61RL

## **Appendix H**

Pictures