

Certification of Compliance

CFR 47 Part 15 Subpart B

Test Report File No. : 05-IST-0289

Date of Issue : September 15, 2005

Model(s) : EFL-2602W
Kind of Product : Gaming LCD Monitor
FCC ID : RY8EFL2602W
Applicant : Effinet Systems, Inc.
Address : #801 KICOX Venture Center, 188-5, Guro-dong Guro-gu,
Seoul, Korea

Manufacturer : Effinet Systems, Inc.
Address : 92, Chogok-ri, Nam-myun, Kimcheon City, Kyungbuk, Korea

Test Result

☒ Positive

☐ Negative

Reviewed By

Approved By



S.J.CHO / EMC Group Manager



J.H.LEE / Chief

Comment (s)

- Investigations requested : Measurement to the relevant clauses of FCC rules and regulations Part 15 Subpart B - Unintentional Radiators, Class B.
- The test report with appendix consists of 17 pages.
- The test result only responds to the tested sample.
- It is not allowed to copy this report even partly without the allowance of IST EMC Laboratory.
- This equipment as for has been shown to be capable of continued compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4 2003.



TABLE OF CONTENTS

Table of contents	2
Information of test laboratory, Environmental conditions, Power used, Product information	3
Descriptions of test	
Conducted Emission	4
Radiated Emission	5
Equipment Under Test	6
Summary	7

■ Test Conditions and Data - Emissions

◆ Conducted Emissions	0.15MHz - 30MHz	Applicable	
Test Conditions / Data and Plots			8-10
◆ Radiated Emissions	30MHz - 1GHz	Applicable	
Test Conditions / Data and Plots			11-14

Appendix	A. The Photos of Test Setup	15-16
	B. The Photos of Equipment Under Test	17

Note:

INFORMATIONS OF TEST LABORATORY

EMC LABORATORY of IST Co., Ltd. (*FCC Filing Lab.*)

San 21-8, Goan-Ri, Baekam-Myun, Yongin-City

Kyonggi-Do, 449-860, Korea

TEL : +82 31 333 4093

FAX : +82 31 333 4094

ENVIRONMENTAL CONDITIONS

Temperature 24 °C

Humidity 59 %

Atmospheric pressure 1009 mbar

POWER SUPPLY SYSTEM USED

Power supply system AC 120V, 60Hz

(Refer to the product information)

PRODUCT INFORMATION

- EMC suppression device is not used during the test.

- Please refer to user's manual.

Model Name : EFL-2602W

FCC ID : RY8EFL2602W

Panel : Size - 26" Diagonal

Active Display Area - 575.77 x 323.71 mm

Type. No - Smausng, LTA260W2

Number of Pixels - 1366(H) x 768(V)

Pixel Arrangement - RGB Vertical Stripe

Pixel Pitch - 0.511mm x 0.511mm

Color Depth - 16.7M True Color

Surface Treatments - Hard Coating(3H), Haze 44%

View Angle - Horizontal : Θ L 85Degrees

Θ R 85Degrees

Vertical : Φ H 85Degrees

Φ L 85Degrees

Contrast Ratio - Typ. 1000 : 1

Panel Demension - (WHD) 626.0 x 373.0 x 51mm

Scanning Frequency : Horizontal - 30 ~ 60KHz

Vertical - 50 ~ 60Hz

Resolution : Prime - 1280 x 768 @60Hz

Standard - 720x400 @70Hz / 640x480 @60Hz / 800x600 @60Hz

1024x768 @60Hz / 1280x768 @60Hz


DESCRIPTIONS OF TEST

Conducted Emissions:

The measurement were performed over the frequency range of 0.15MHz to 30MHz using a $50\Omega/50\mu\text{H}$ LISN as the input transducer to a Spectrum Analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 10KHz or for "quasi-peak" & "Average" within a bandwidth of 9KHz.

-Procedure of Test

The line-conducted facility is located inside a shielded room No.1. A 1m X 1.5m wooden table 80cm height is placed 40cm away from the vertical wall and 1.5m away from the other wall of the shielded room. The R/S ESH3 and Hyup-Rip KNW-407 LISN are bonded to bottom of the shielded room. The EUT is located on the wooden table with distance more than 80cm from the LISN and powered from the EMC LISN. The peripheral equipment is powered from the other LISN. Power to the LISNs are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner ϕ 1.2cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the EMC LISN. All interconnecting cables more than 1m were shortened by non-inductive bundling to a 1m length. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating conditions. The RF output of the LISN was connected to the R/S receiver to determine the frequency producing the maximum emission from the EUT. The frequency producing the maximum level was reexamined using Quasi-Peak mode by manual measurement, after scanned by automatic Peak mode for frequency range from 0.15 to 30MHz. The bandwidth of the receiver was set to 10kHz. The EUT, peripheral equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

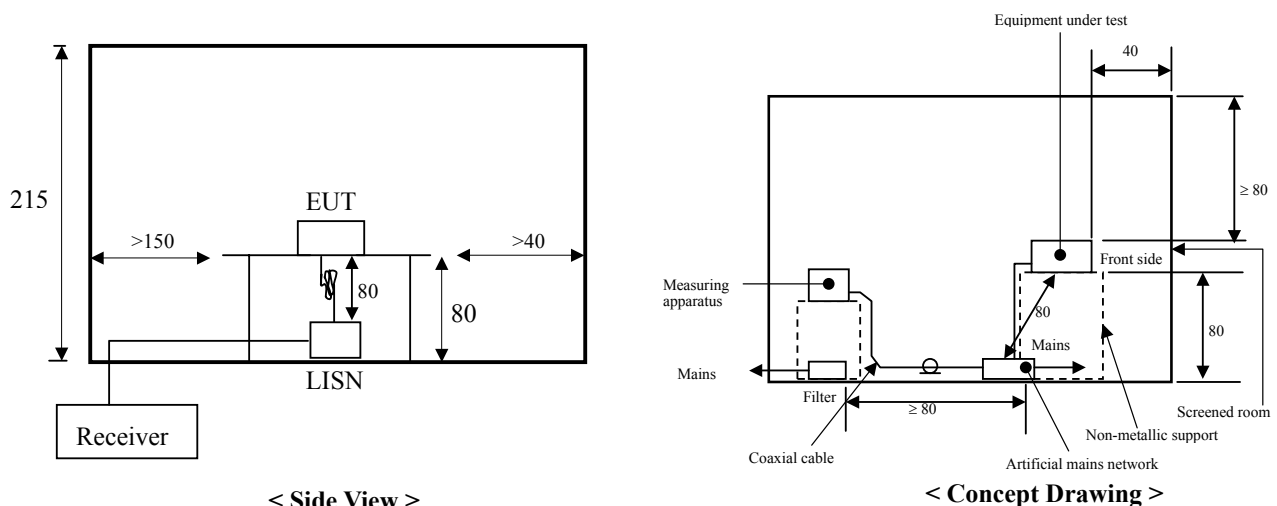



DESCRIPTION OF TEST

Radiated Emissions:

The measurement was performed over the frequency range of 30MHz to 1GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurement was made with the detector set for "quasi-peak" within a bandwidth of 120KHz.

-Procedure of Test

Preliminary measurements were made at 3 meter using bi-conical and log-periodic antennas, and spectrum analyzer to determine the frequency producing the max. emission in anechoic chamber. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turn-table azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30MHz to 300MHz using S/B bi-conical antenna and 300 to 1000MHz using S/B log-periodic antenna. Above 1GHz, linearly polarized double ridge horn antennas were used. Final measurements were made at open site with 3-meters test distance using S/B bi-log antenna or horn antenna. The OATS have been verified in regular for its normalized site attenuation. The test equipment was placed on a wooden table. Sufficient time for the EUT, peripheral equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 120kHz or 1MHz depending on the frequency of type of signal. The EUT, peripheral equipment and interconnecting cables were re-configured to the set-up producing the max. emission for the frequency and were placed on top of a 0.8-meter high nonmetallic 1 x 1.5 meter table. The EUT, peripheral equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation to the EUT and/or peripheral equipment and changing the polarity of the antenna, whichever determined the worst-case emission.

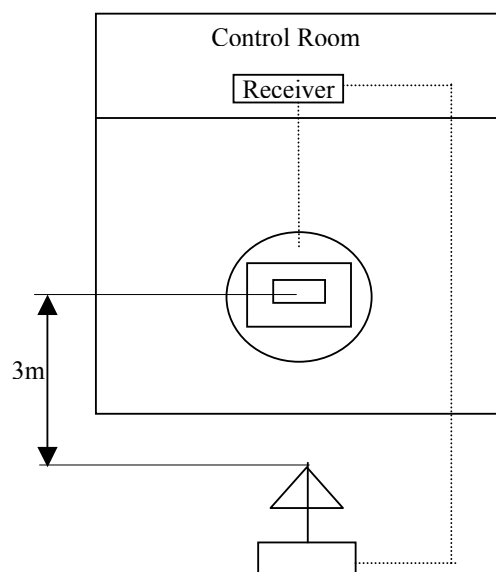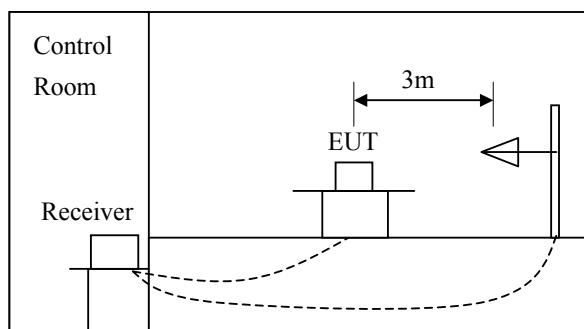

Equipment Under Test

EUT Type :

- ☒ Table-Top. ☐ Floor-Standing.
☐ Table-Top and Floor-Standing(Combination).

Operation - mode of the E.U.T. :

The equipment under test was operated during the measurement under following conditions :

- ☐ Standby Mode
☒ Operational Condition : Scrolling H pattern on the Window
■ 1280 x 768, 60Hz
■ 1024 x 768, 60Hz
■ 800 x 600, 60Hz

Configuration of the equipment under test :

Following peripheral devices and interface cables were connected during the measurement :

Equipment	Type	Brand	Serial No.
PC	Vectra VL420 MT	HP	SG23101784
Keyboard(PS/2)	SK-2502C	HP	M020321066
Mouse(PS/2)	M-S48a	HP	LZC20602926
Mouse(Serial)	M-M28	Logitech	N/A
Printer	A0302380	Northern Telecom	N/A

Connecting Interface Cables :

Shielded monitor's signal cable(with two ferrite core) : 1.6 m
Shielded Printer's signal cable(with two ferrite core) : 1.8 m
Unshielded Mouse(Serial) cable(without ferrite core) : 1.5 m
Unshielded Mouse(PS/2) cable(without ferrite core) : 1.6 m
Unshielded Keyboard(PS/2) cable(without ferrite core) : 1.6 m

Note :

TEST CONDITIONS AND DATA

Conducted Emissions

[Applicable]

◆ Test Equipment Used

Model Name	Description	Manufacture	Calibration Date	Serial Number
ESH 3	Test Receiver	Rohde & Schwarz	Jul. 12, 2005	892108/018
3725/2	LISN	EMCO	Jul. 12, 2005	9101-2068
KNW-407	LISN	Hyup-Rip	Jul. 12, 2005	8-883-10
ESH 3-Z2	Transient limiter	Rohde & Schwarz	Jul. 12, 2005	357.8810.52

◆ Test Accessories Used

Type	Manufacturer
Aneroid Barometer	Sato
Hygrometer	Sato

◆ Test Program Scrolling H pattern on the windows at 1280 x768, 60Hz


◆ Test Date September 07, 2005

◆ Test Area Conducted room No.1

Note : The equipment used is calibrated in regular for every year.

Conducted Emissions

Live Phase

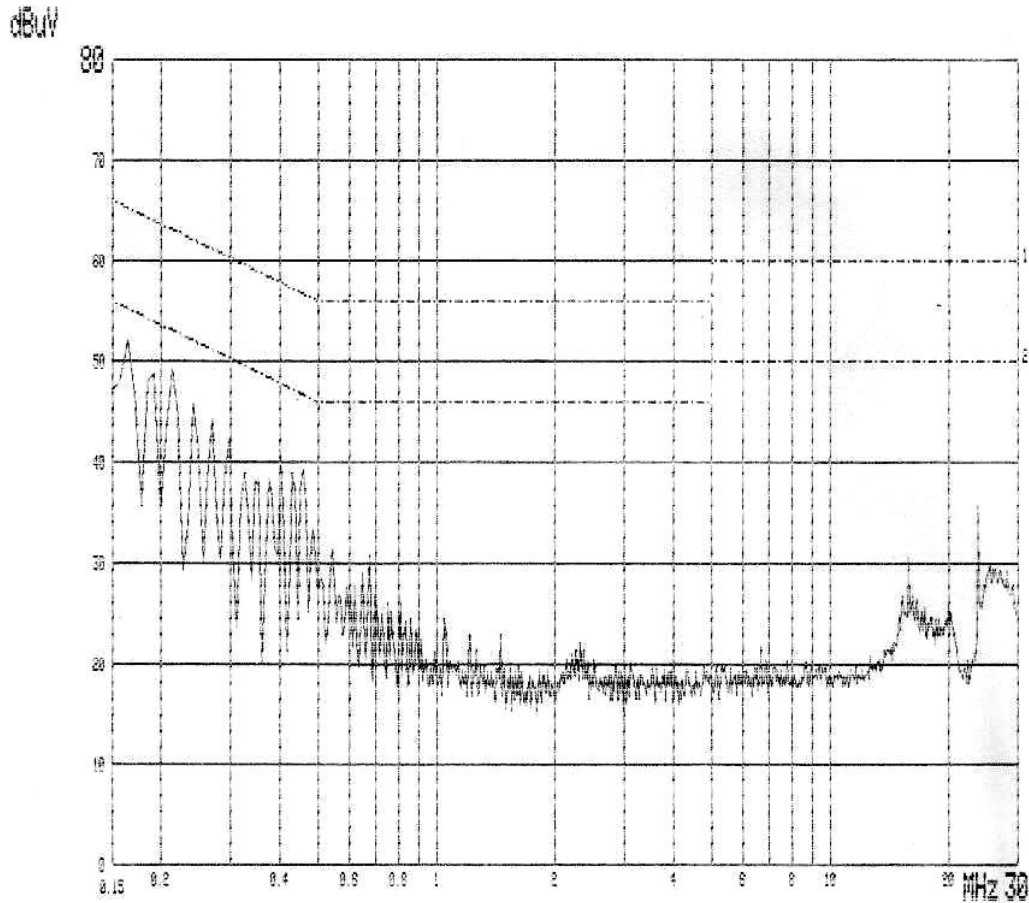


MODEL NAME : EFL-2602W
120Vac 60Hz PHASE : LIVE

Freq. [MHz]	Measurement [dB μ V]		Limit [dB μ V]		Insertion Loss [dB]	Cable Loss [dB μ V]	Result [dB μ V]		Margin [dB]	
	Q-peak	Average	Q-peak	Average			Q-peak	Average	Q-peak	Average
0.163	51.5	44.9	65.3	55.3	0.2	0.5	52.2	45.6	13.1	9.7
0.188	50.5	46.3	64.1	54.1	0.3	0.5	51.3	47.1	12.9	7.1
0.511	28.5	25.3	56.0	46.0	0.3	0.4	29.2	26.0	26.8	20.0
0.646	27.0	23.1	56.0	46.0	0.3	0.4	27.7	23.8	28.3	22.2
15.872	29.2	23.0	60.0	50.0	0.6	0.7	30.5	24.3	29.5	25.7
23.783	34.8	28.6	60.0	50.0	0.9	0.7	36.4	30.2	23.6	19.8

Note : 1280 x 768, 60Hz

Conducted Emissions

Neutral Phase

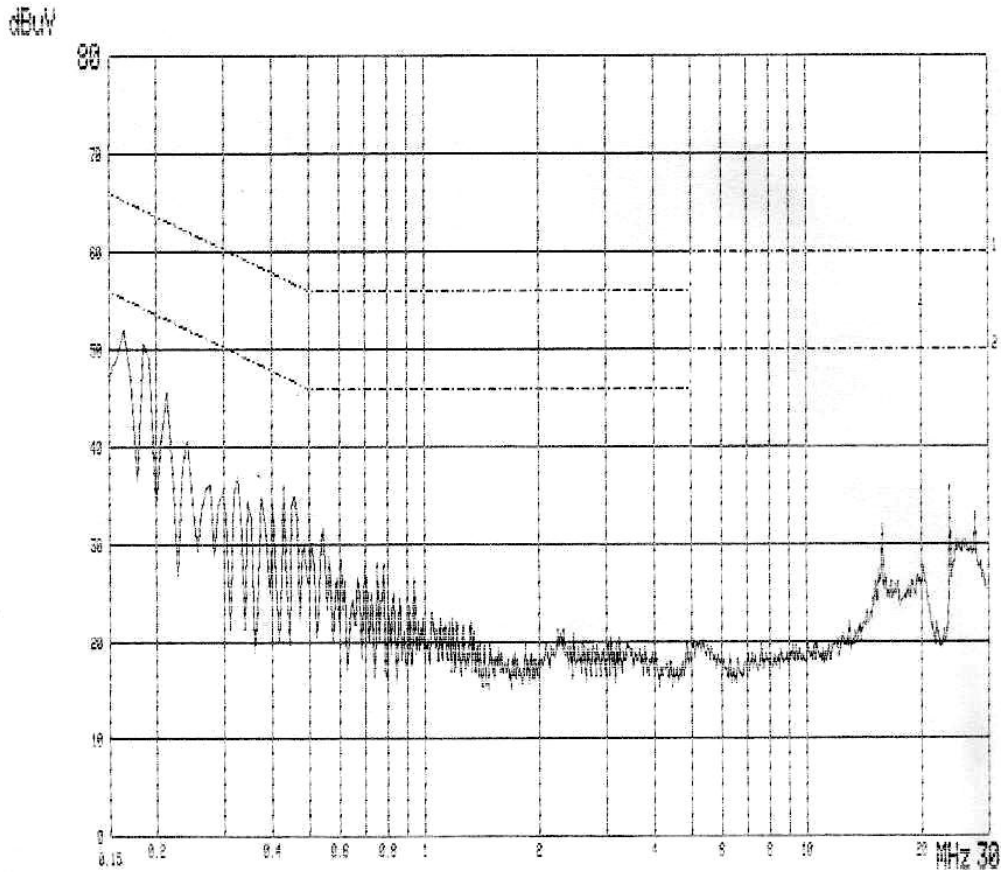

MODEL NAME : EFL-2682W
120Vac 60Hz PHASE : NEUTRAL

Freq. [MHz]	Measurement [dB μ V]		Limit [dB μ V]		Insertion Loss [dB]	Cable Loss [dB μ V]	Result [dB μ V]		Margin [dB]	
	Q-peak	Average	Q-peak	Average			Q-peak	Average	Q-peak	Average
0.163	52.3	45.4	65.3	55.3	0.2	0.5	53.0	46.1	12.3	9.2
0.188	49.0	44.4	64.1	54.1	0.3	0.5	49.8	45.2	14.3	8.9
0.511	28.9	25.3	56.0	46.0	0.4	0.4	29.7	26.1	26.3	19.9
0.550	27.8	24.7	56.0	46.0	0.4	0.4	28.6	25.5	27.4	20.5
15.871	30.1	22.9	60.0	50.0	0.6	0.7	31.4	24.2	28.6	25.8
23.783	35.0	28.7	60.0	50.0	0.9	0.7	36.6	30.3	23.4	19.7

Note : 1280 x768, 60Hz

TEST CONDITIONS AND DATA

Radiated Emission

[Applicable]

◆ Test Equipment Used

Name	Type	Manufacturer	Calibration. Date	Serial Number
ESVS 10	Test Receiver	Rohde & Schwarz	Aug. 16, 2005	839049/004
VULB 9160	Antenna	Schwarzbeck	Jul. 19, 2005	3047

◆ Test Accessories Used

Type	Manufacturer
Aneroid Barometer	Sato
Hygrometer	Sato

◆ Test Program Scrolling H pattern on the windows

◆ Test Date September 13, 2005

◆ Test Area Open site No.2

Note : The equipment used is calibrated in regular for every year.

Radiated Emissions
 (Disturbance Radiation)

[Applicable]

Mode	Freq. [MHz]	Reading [dBuV]	Antenna Factor [dB/m]	Cable Loss [dB]	Polar. [H/V]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]
1280x768, 60Hz	80.0	24.5	8.0	2.0	V	34.5	40.0	5.5
	82.6	20.3	8.0	2.0	V	30.3	40.0	9.7
	159.9	18.1	13.1	2.9	V	34.1	43.5	9.4
	239.8	19.4	10.8	3.8	H	34.0	46.0	12.0
	253.8	17.6	11.1	3.9	V	32.6	46.0	13.4
	261.7	19.5	11.3	3.9	H	34.7	46.0	11.3
	293.4	14.2	12.3	4.2	V	30.7	46.0	15.3
	359.7	16.7	13.9	4.8	V	35.4	46.0	10.6
	436.2	10.0	15.5	5.4	H	30.9	46.0	15.1
	479.7	13.9	16.5	5.9	V	36.3	46.0	9.7
1024x768, 60Hz	57.7	16.4	11.3	1.6	V	29.3	40.0	10.7
	79.8	23.2	8.1	1.9	V	33.2	40.0	6.8
	119.4	11.6	11.3	2.5	V	25.4	43.5	18.1
	159.4	17.6	13.1	2.9	V	33.6	43.5	9.9
	222.1	14.2	9.5	3.6	V	27.3	46.0	18.7
	239.7	18.5	10.8	3.8	H	33.1	46.0	12.9
	253.8	17.6	11.1	3.9	V	32.6	46.0	13.4
	293.4	14.2	12.3	4.2	V	30.7	46.0	15.3
	301.4	13.3	12.5	4.4	V	30.2	46.0	15.8
	359.5	15.0	13.9	4.8	V	33.7	46.0	12.3
	479.7	12.6	16.5	5.9	V	35.0	46.0	11.0

Note:

Radiated Emissions


(Disturbance Radiation)

[Applicable]

Mode	Freq. [MHz]	Reading [dBuV]	Antenna Factor [dB/m]	Cable Loss [dB]	Polar. [H/V]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]
800x600, 60Hz	57.6	16.1	11.3	1.6	V	29.0	40.0	11.0
	79.8	22.6	8.1	1.9	V	32.6	40.0	7.4
	82.5	18.6	8.0	2.0	V	28.6	40.0	11.4
	119.4	11.0	11.3	2.5	V	24.8	43.5	18.7
	159.9	18.1	13.1	2.9	V	34.1	43.5	9.4
	239.8	18.6	10.8	3.8	H	33.2	46.0	12.8
	261.7	19.2	11.3	3.9	H	34.4	46.0	11.3
	277.6	14.1	11.9	4.1	H	30.1	46.0	15.9
	301.4	13.3	12.5	4.4	V	30.2	46.0	15.8
	359.7	15.1	13.9	4.8	V	33.8	46.0	12.2
	479.7	13.0	16.5	5.9	V	35.4	46.0	10.6

Note:

MEASUREMENT OF DISTURBANCE RADIATION

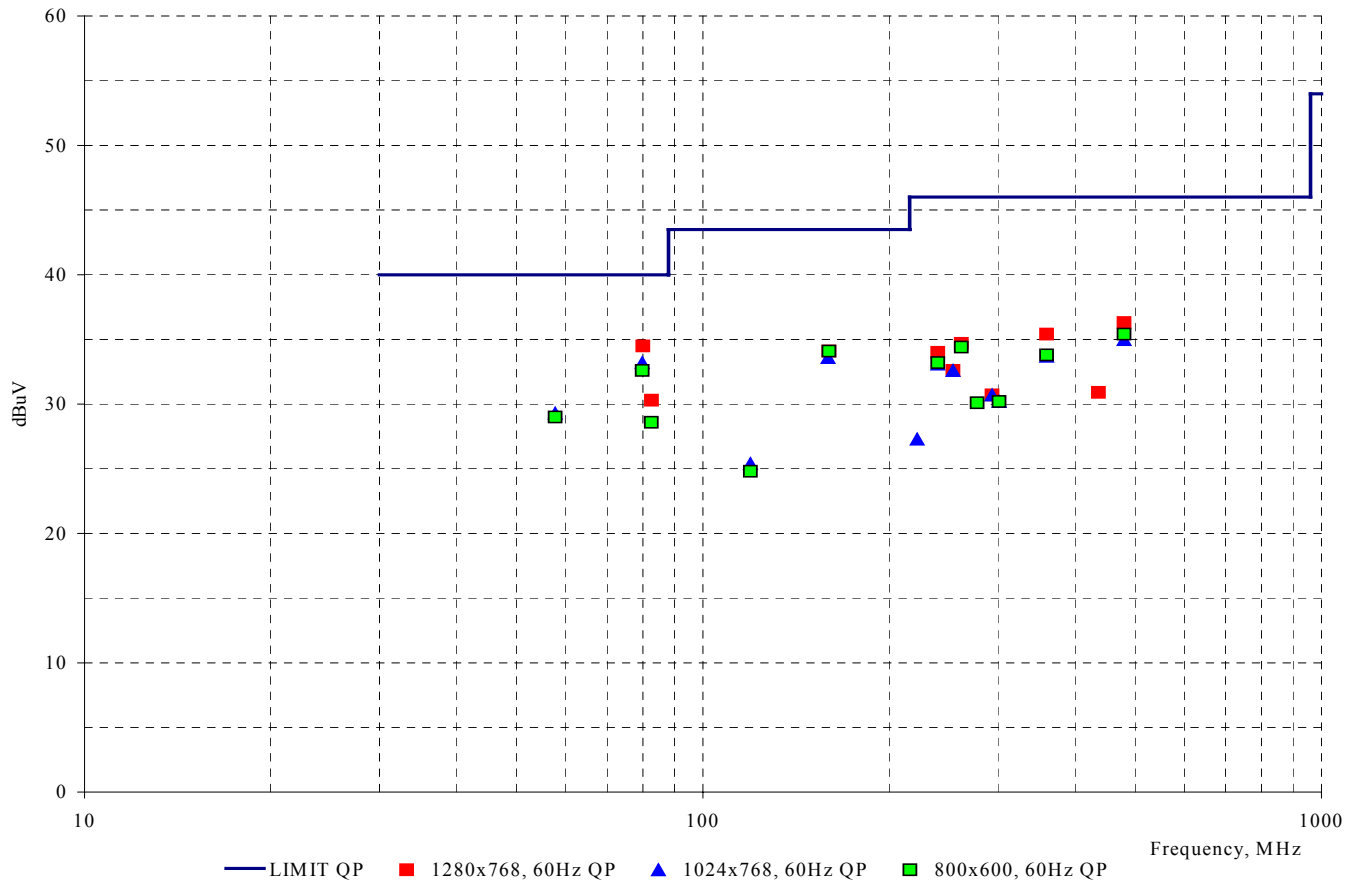

Appendix A. The Photos of Test Setup




Conducted Emissions - Front View



Conducted Emissions - Rear View

Appendix A. The Photos of Test Setup

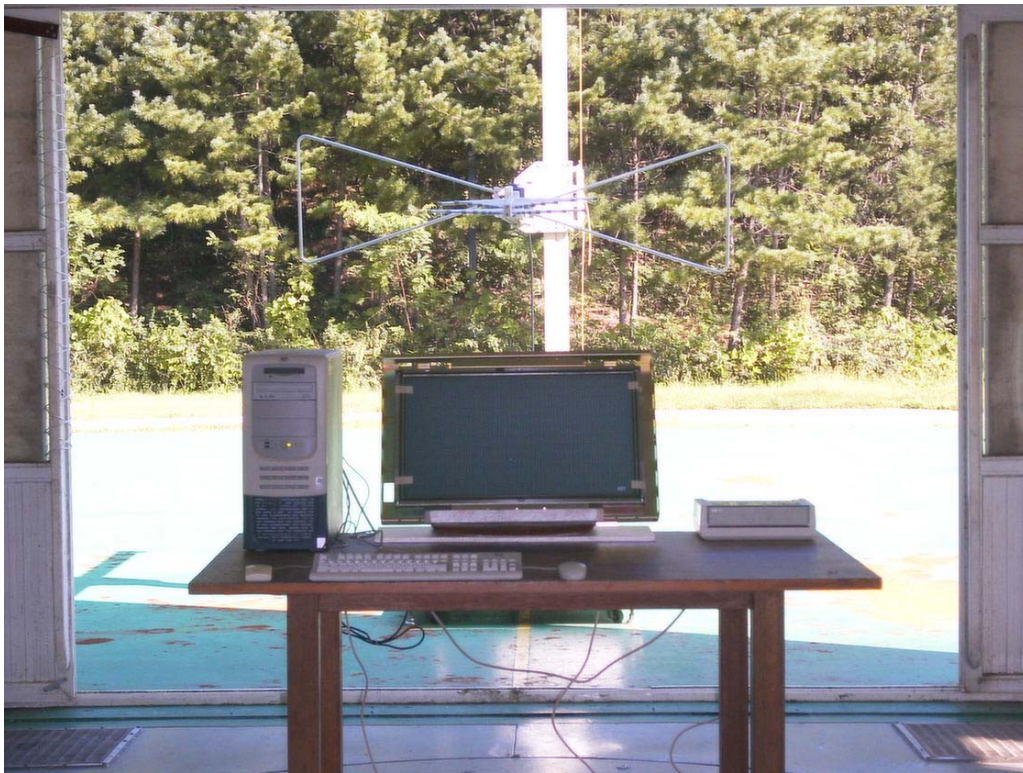

Radiated Emissions - Front View




Radiated Emissions - Rear View

Appendix B. The Photos of Equipment Under Test



Front View

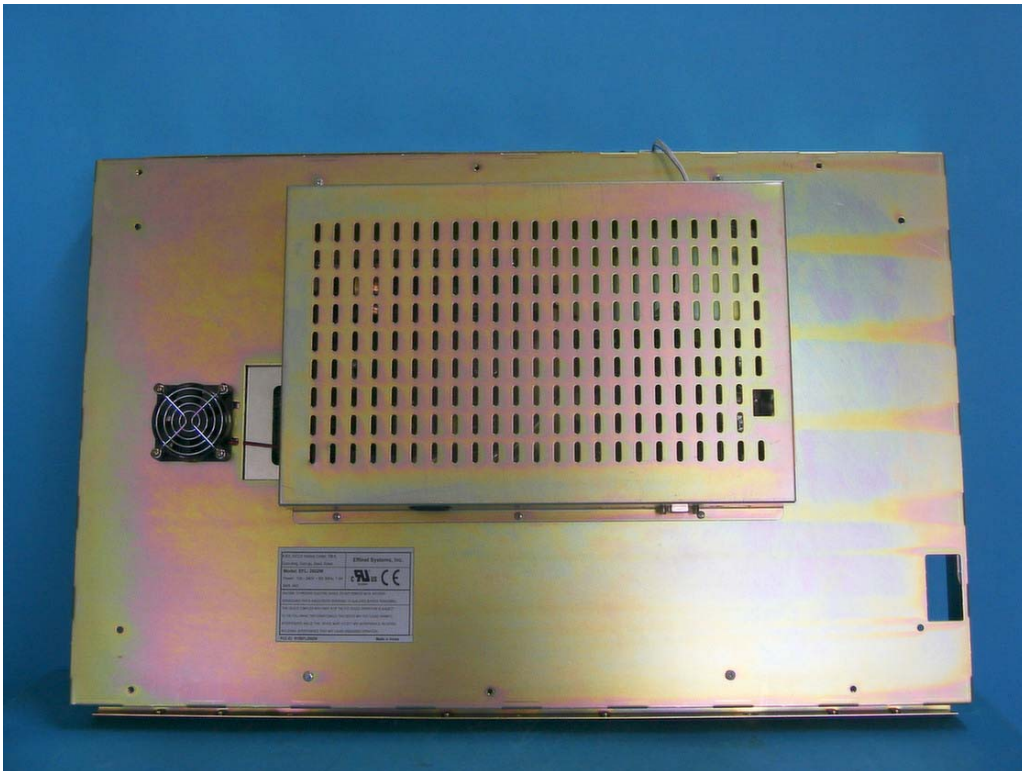

Rear View