

AD-305N

Antenna Approval Sheet

Part Number	R3410110223
Product Number	AD-305N
Description	5dBi/5.53dBi 2.4G/5GHz Dipole RP-SMA
DOC NO.	AS-1809003

Ver.1.4

Revised History

Version	Purpose	Date	Editor
V1.0	Initial	09/18/2018	Aaron
V1.1	Revised Page6 Pic and Page 8 Gain table	02/15/2019	Kamoro
V1.2	Replaced page 6 picture	08/16/2019	Kamoro
V1.3	Added Packing Info.	01/03/2020	Kamoro
V1.4	Revised Specification / Frequency (Page 3)	08/28/2020	Kamoro

SparkLAN		Customer
Sales	PM	Approved by
	Aaron	

Index


1. Features.....	3
2. Specification	3
3. Mechanical Dimensions	3
4. Antenna Testing System.....	4
5. Antenna under testing.....	5
6. Antenna Placement	6
7. ANT S-Parameter, VSWR & Smith Chart	7
8. Gain Table	8
9. Ant 2.4G 2D&3D Gain pattern	9
10. Ant 5G 2D&3D Gain pattern	11
11. Packing information	13

Features


- Dual band IEEE 802.11 a/b/g/n/ac standard
- High efficiency
- Quick integration

Specification

Frequency (MHz)	2400 - 2483	5150 - 5825
Peak Gain (dBi)	5.0 ± 0.5	5.0 ± 0.5
VSWR	≤2.0	≤2.0
Power (Watts)	1	1
Impedance (Ohms)	50	50
Dimension (mm)	196 x Ø13	
Weight (g)	20 ±2 g	
Connector	SMA Male RP	
Polarization	Liner ; Vertical	
Operating Temp (°C)	-20°C ~ +60°C	




2.45GHz



5GHz


Mechanical Dimensions

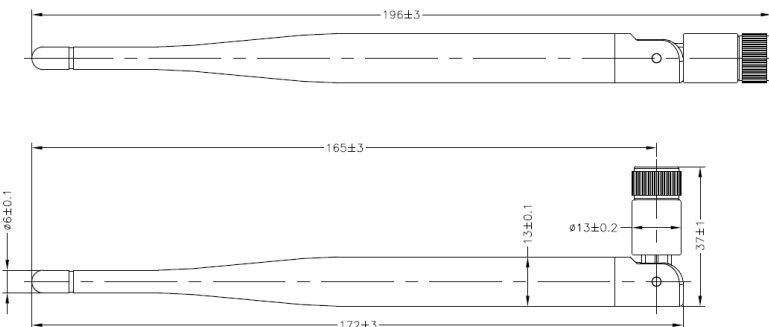

Manufacture: Lynwave Technology Ltd.

Manufacturer address: 5F., No. 655, Xuecheng Rd., Shulin Dist., New Taipei City, 238701, Taiwan

Antenna Testing System

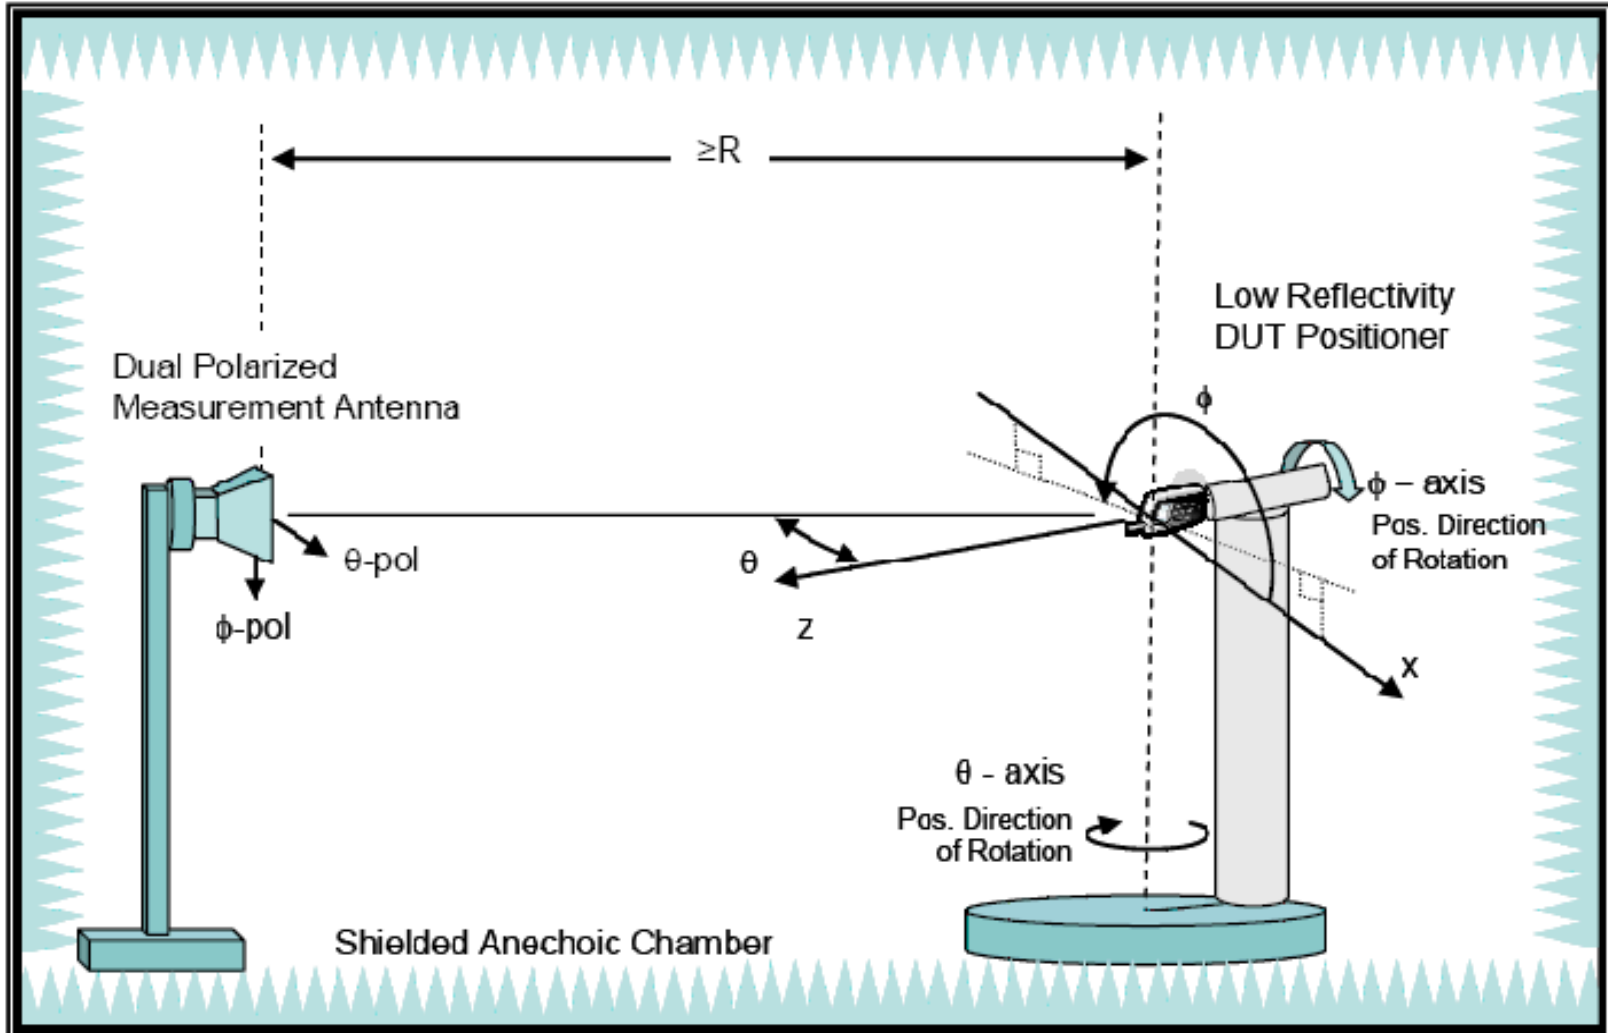


Antenna under testing



Antenna Placement




ANT S-Parameter, VSWR & Smith Chart

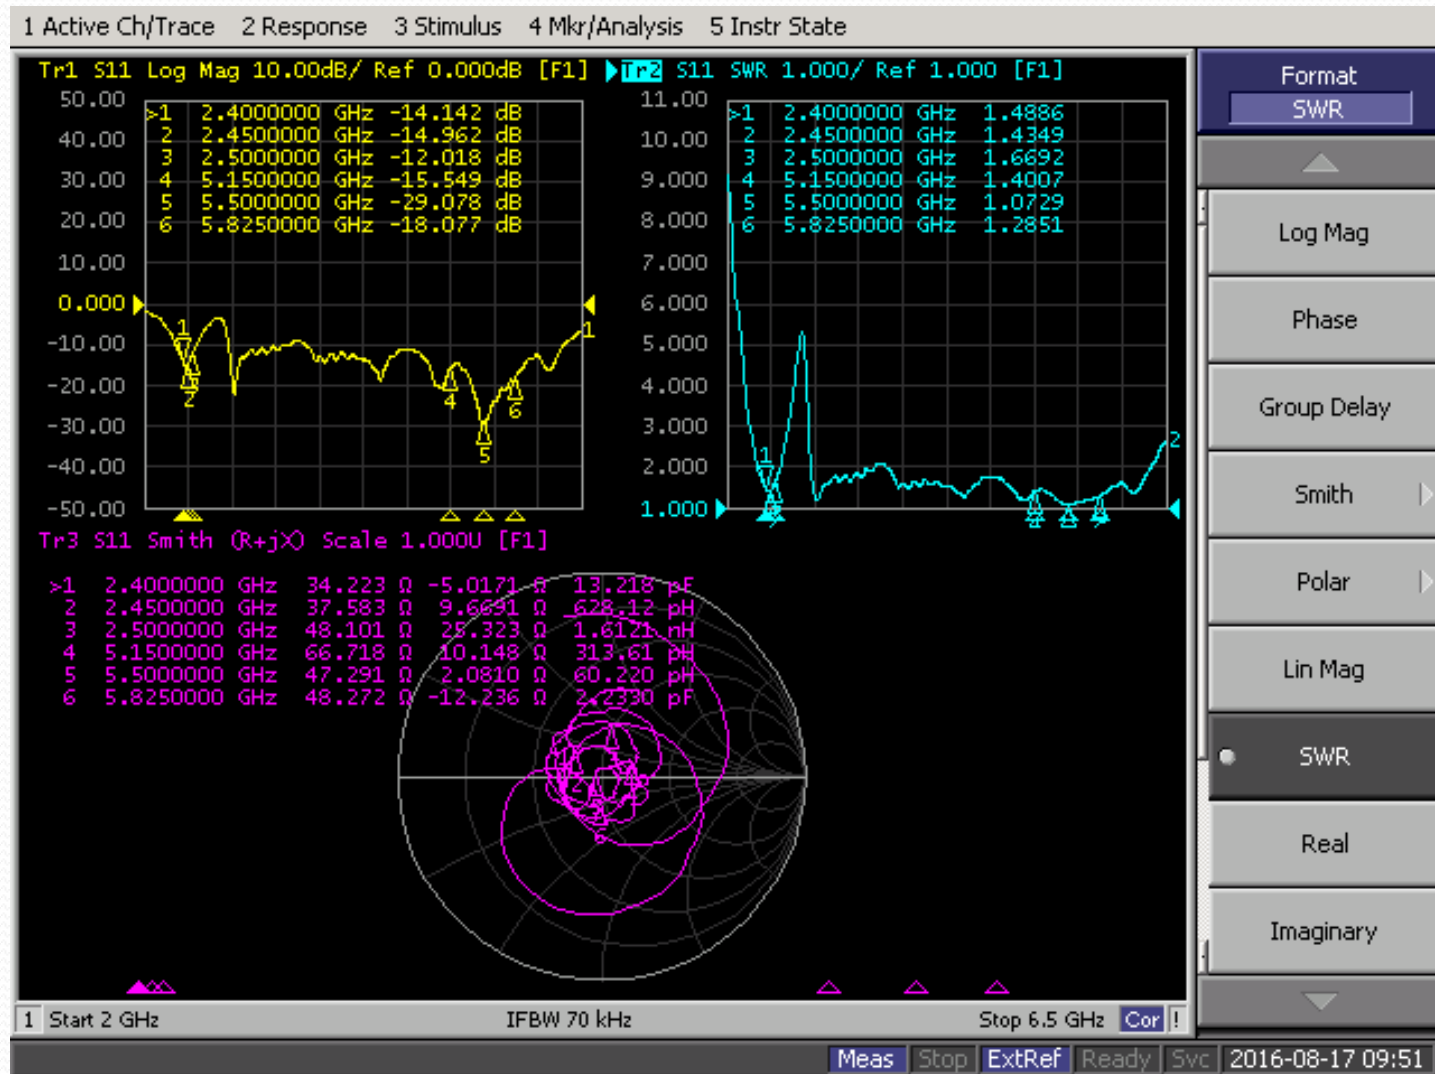


Gain Table

Ant												
Frequency (MHz)	2400	2450	2500	5150	5250	5350	5450	5550	5650	5725	5775	5825
Efficiency (dB)	-1.77	-1.32	-1.42	-1.27	-1.49	-1.62	-1.58	-1.39	-1.43	-1.69	-1.66	-1.71
Peak Gain (dBi)	4.62	5.00	4.85	5.53	5.44	5.26	5.43	5.53	5.01	4.69	4.69	4.57
Efficiency (%)	66.47	73.82	72.07	74.69	70.91	68.8	69.51	72.62	71.93	67.84	68.24	67.39


Ant 2.4G 3D Gain pattern

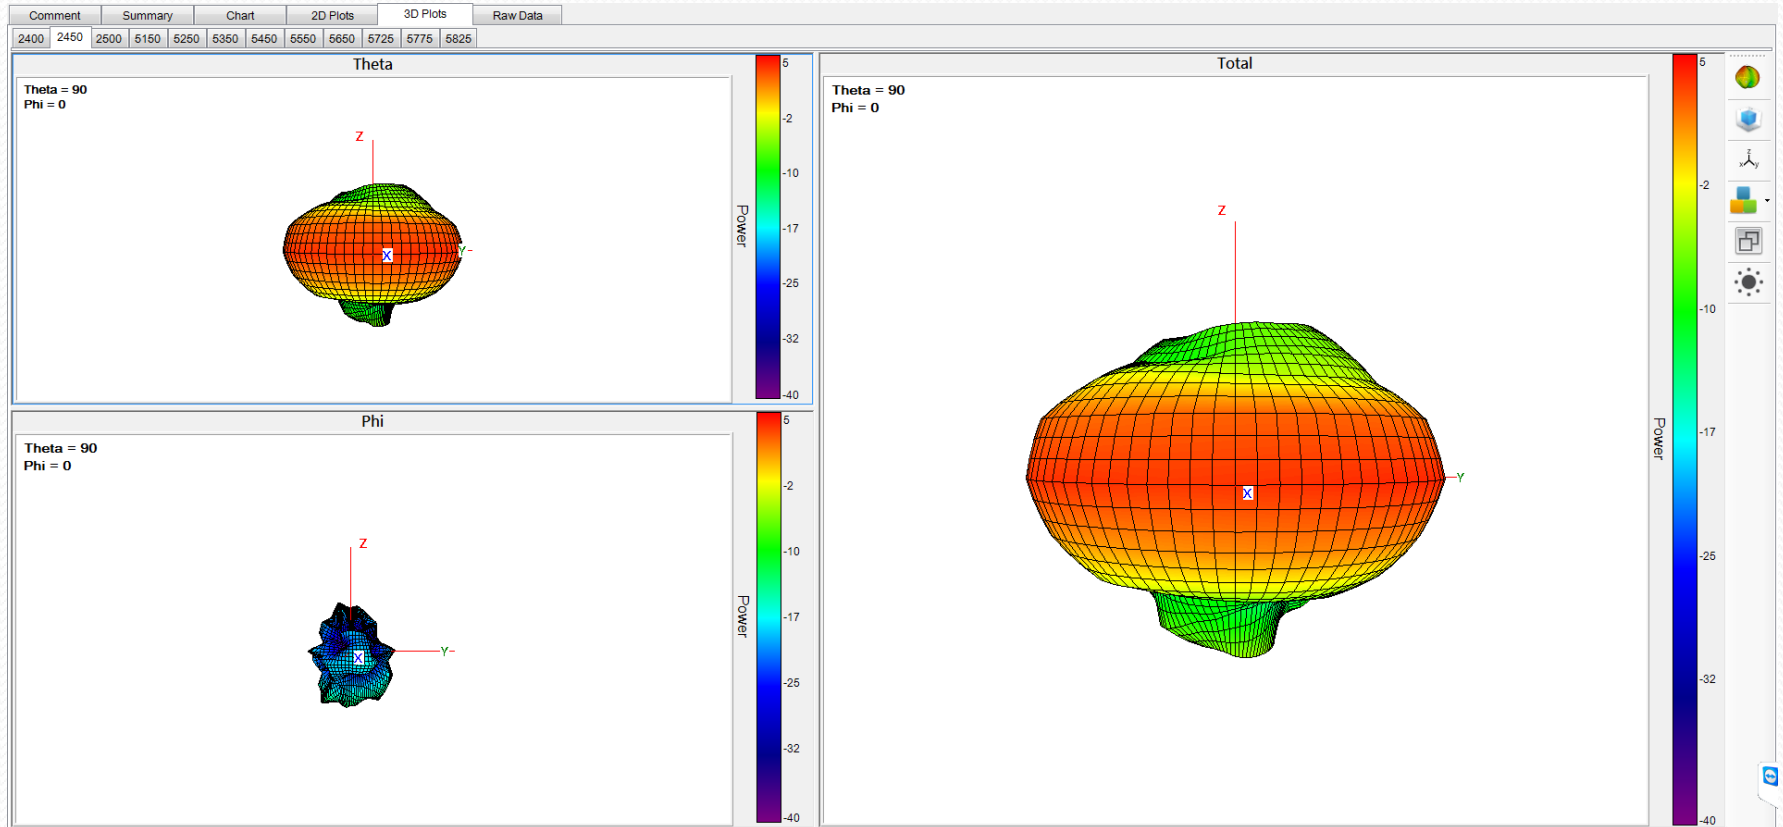


Ant 2.4G 2D Gain pattern

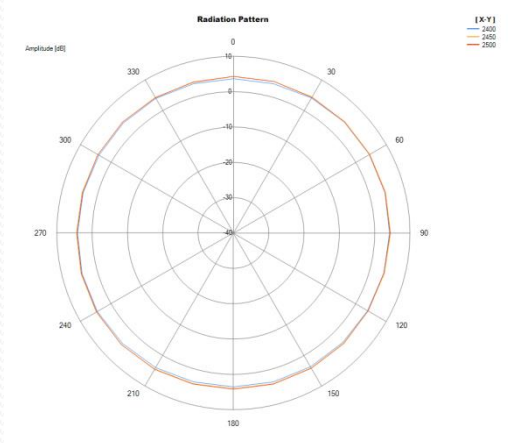

X-Y

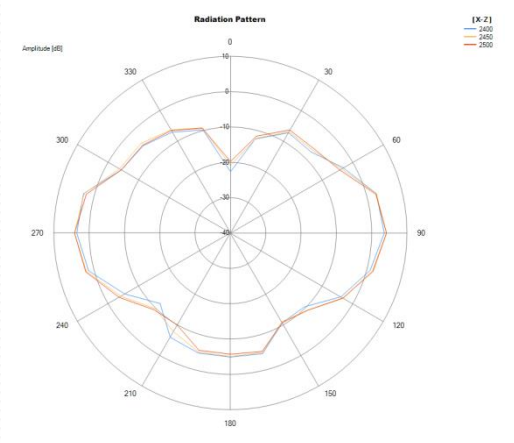


X-Z


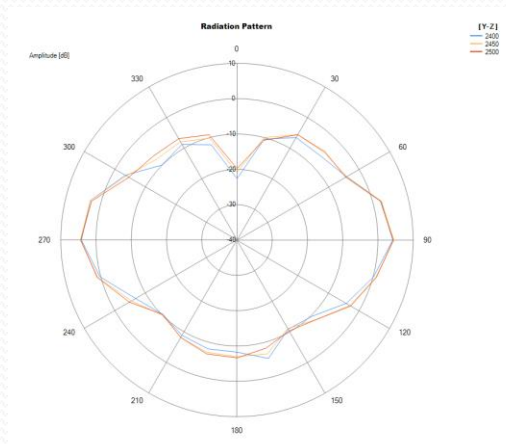


Y-Z


Ant 5G 3D Gain pattern

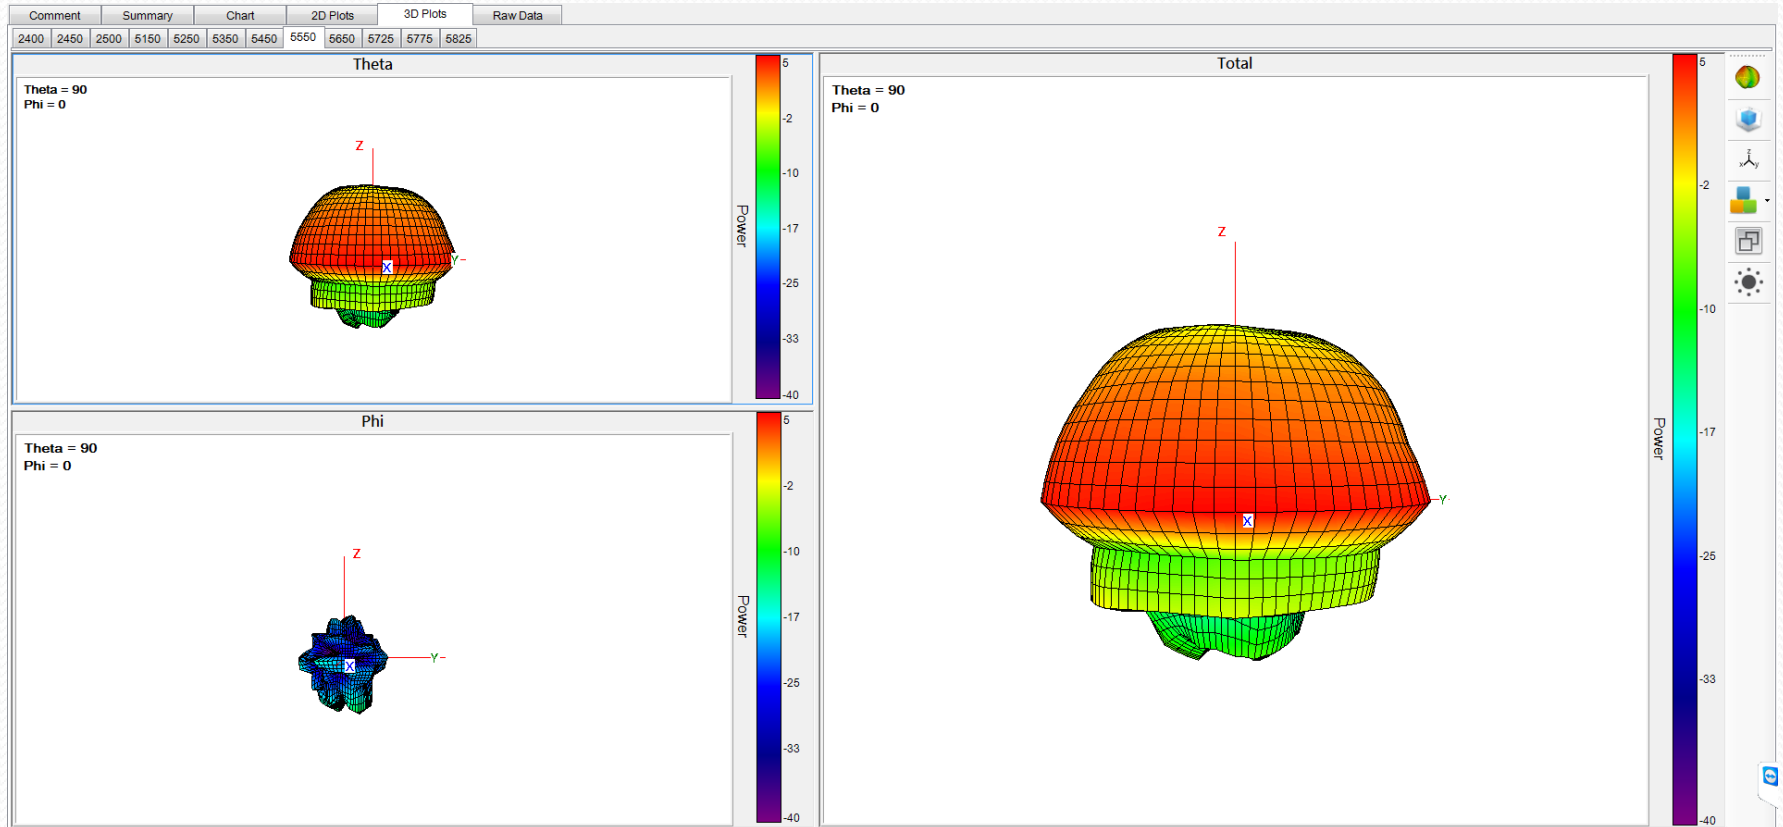

Ant 5G 2D Gain pattern

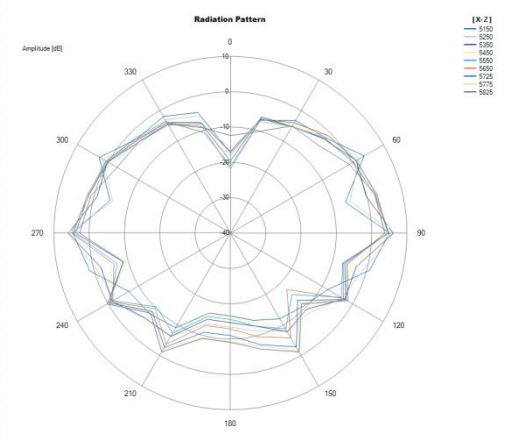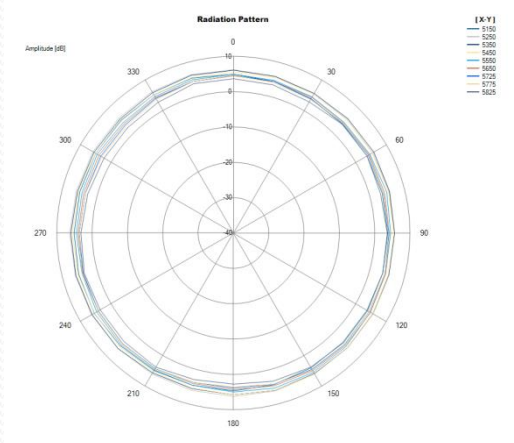

X-Y

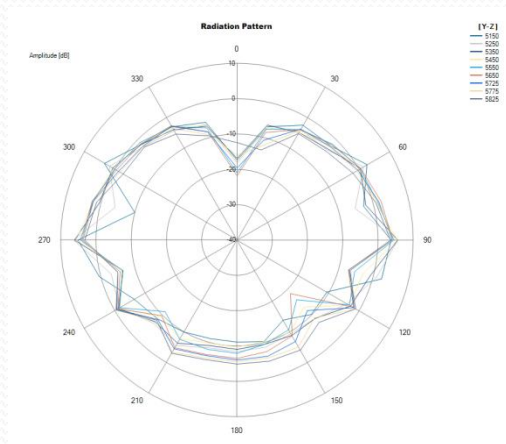

X-Z

Y-Z

包裝規範書

產品名稱	AD-305N	客戶名稱		產品名稱	
產品料號	R3410110223	客戶料號		製作日期	2020/5/27

產品包裝說明:


單個產品



內袋包裝說明:

1. PE袋厚 0.1mm, 每PE袋裝入 20 pcs 產品.
2. 每袋需貼 1pc 內袋標籤(PE袋正中間) 以及 1pc RoHS 標籤, RoHS 標籤需粘貼在內袋標籤的正下方位置.

內袋包裝

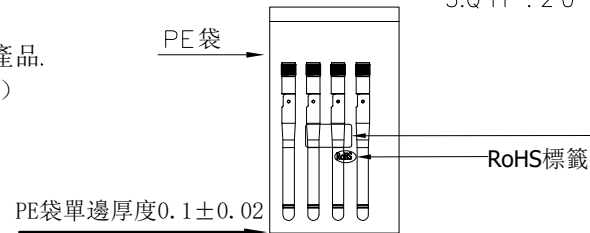

標籤說明:

1. Company : SparkLAN Communications, Inc.
2. Model Name : AD-305
3. Description : Dipole Antenna, 5dBi/5dBi 2.4G/5GHz, RP-SMA(M) connector
4. Part NO : R3410110223
5. Q'TY : 20 PCS


Company	SparkLAN Communications, Inc.
Model Name	AD-305
Description	Dipole Antenna, 5dBi/5dBi 2.4G/5GHz, RP-SMA(M) connector
Part NO	R3410110223
Q'TY	20 PCS


內袋標籤

Pack full: 20pcs/ Bag



外箱包裝

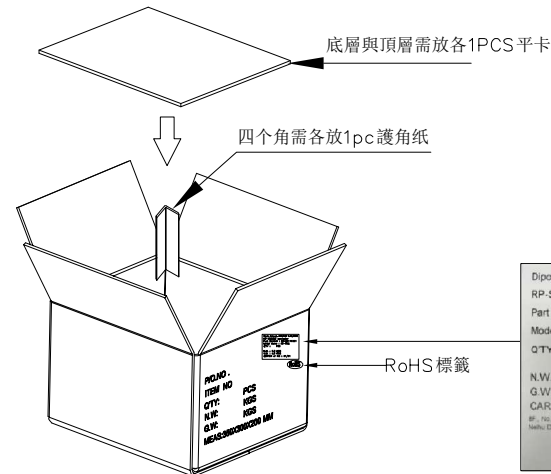

Dipole Antenna, 3dBi(2dBi) 2.4G/5GHz, RP-SMA(M) connector	
Part Number: R3410110221	
Model No.: AD-302N	
Q'TY: 20 PCS	
N.W: 0.3 KGS	
G.W: 0.5 KGS	
CARTON of NO: 01 / 01	
R.F. No. 287, Sec. 2, Tung Hsing, Hsichu District, Taipei 11493, Taiwan	
Made in Taiwan	

外箱標籤示意

外箱包裝說明:

1. 紙箱底層與頂層需各放 1pc 平卡 · 紙箱四個角需各放 1pc 護角紙.
2. 外箱需貼 1pc 外箱標籤(規格尺寸面) 右上角位置.
3. RoHS 標籤需外箱標籤右下角外置.
4. 紙箱尺寸: 長 350mm * 寬 300mm * 高 200mm.
5. 每箱裝 25 袋產品 · 共計裝 500 pcs 產品.
6. 箱內若有空隙需用填充材填實, 避免晃動.
7. 實際包裝會依出貨數量進行調整.