


# FCC Test Report

**FCC ID** : RYK-WPEQ257ACN  
**Equipment** : 802.11ac/b/g/n Mini PCIe Module  
**Model No.** : WPEQ-257ACN  
**Brand Name** : SparkLAN  
**Applicant** : SparkLAN Communications, Inc.  
**Address** : 8F., No.257, Sec. 2, Tiding Blvd., Neihu  
District, Taipei City 11493, Taiwan.  
**Standard** : 47 CFR FCC Part 15.247  
**Received Date** : Jun. 06, 2016  
**Tested Date** : Jul. 28 ~ Aug. 05, 2016

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

Approved by:

  
Along Chen / Assistant Manager

  
Gary Chang / Manager



---

## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Local Support Equipment List .....	7
1.3	Test Setup Chart .....	7
1.4	The Equipment List .....	8
1.5	Test Standards .....	9
1.6	Measurement Uncertainty .....	9
<b>2</b>	<b>TEST CONFIGURATION .....</b>	<b>10</b>
2.1	Testing Condition .....	10
2.2	The Worst Test Modes and Channel Details .....	10
<b>3</b>	<b>TRANSMITTER TEST RESULTS.....</b>	<b>11</b>
3.1	Conducted Emissions.....	11
3.2	6dB and Occupied Bandwidth .....	14
3.3	RF Output Power .....	17
3.4	Power Spectral Density .....	19
3.5	Unwanted Emissions into Restricted Frequency Bands .....	21
3.6	Emissions in Non-Restricted Frequency Bands .....	49
<b>4</b>	<b>TEST LABORATORY INFORMATION .....</b>	<b>62</b>

---

## Release Record

Report No.	Version	Description	Issued Date
FR660602AC	Rev. 01	Initial issue	Sep. 14, 2016

## Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.367MHz 40.74 (Margin -7.82dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 2483.50MHz 52.99 (Margin -1.01dB) – AV [dBuV/m at 3m]: 2390.00MHz 72.99 (Margin -1.01dB) – PK	Pass
15.247(b)(3)	Maximum Output Power	Max Power [dBm]: 25.94	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

# 1 General Description

## 1.1 Information

### 1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N <sub>TX</sub> )	Data Rate / MCS
2400-2483.5	b	2412-2462	1-11 [11]	2	1-11 Mbps
2400-2483.5	g	2412-2462	1-11 [11]	2	6-54 Mbps
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	2	MCS 0-15
2400-2483.5	n (HT40)	2422-2452	3-9 [7]	2	MCS 0-15

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.  
 Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.  
 Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

### 1.1.2 Antenna Details

Ant. No.	Brand	Model	Type	Connector	Operating Frequencies / Antenna Gain (dBi)		
					2400~2483.5MHz	5150~5250MHz	5725~5850MHz
1	Wanshih Electronic Co., Ltd.	WSS038	Dipole	RP-SMA	4.6	5	5
2	Long Cheng Tech. Int'l Co., Ltd.	DB B-SMA THIN PADDLE Ant. GEC6200	Dipole	RP-SMA	3	5	5

### 1.1.3 Power Supply Type of Equipment under Test (EUT)

<b>Power Supply Type</b>	3.3Vdc from host
--------------------------	------------------

### 1.1.4 Accessories

N/A

### 1.1.5 Channel List

Frequency band (MHz)		2400~2483.5	
802.11 b / g / n HT20		802.11n HT40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	3	2422
2	2417	4	2427
3	2422	5	2432
4	2427	6	2437
5	2432	7	2442
6	2437	8	2447
7	2442	9	2452
8	2447	---	---
9	2452	---	---
10	2457	---	---
11	2462	---	---

### 1.1.6 Test Tool and Duty Cycle

Test Tool	ART2-GUI, Version: 2.3		
Duty Cycle and Duty Factor	Mode	Duty cycle (%)	Duty factor (dB)
	11b	100.00%	0.00
	11g	100.00%	0.00
	HT20	100.00%	0.00
	HT40	100.00%	0.00


### 1.1.7 Power Setting

Modulation Mode	Test Frequency (MHz)	Power Set
11b	2412	16
11b	2437	15
11b	2462	16
11g	2412	12
11g	2437	19
11g	2462	10
HT20	2412	12
HT20	2437	19
HT20	2462	10
HT40	2422	9
HT40	2437	13
HT40	2452	8

### 1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Signal cable / Length (m)
1	Notebook	DELL	Latitude E6430	DoC	---
2.	Extension Card	---	---	---	---

### 1.3 Test Setup Chart

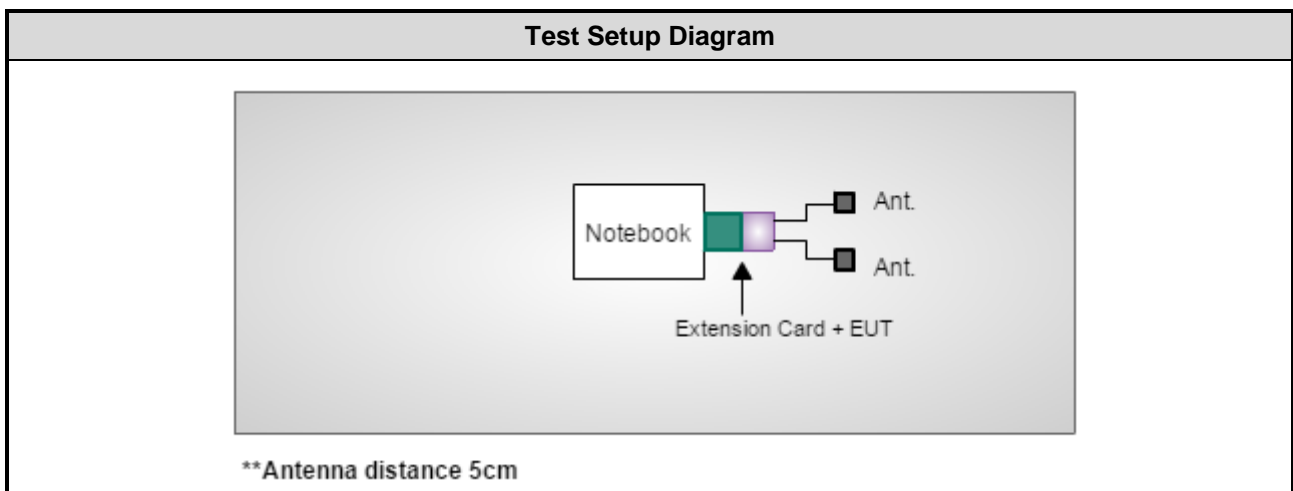

## 1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
EMC Receiver	R&S	ESCS 30	100169	Oct. 21, 2015	Oct. 20, 2016
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 13, 2015	Nov. 12, 2016
RF Cable-CON	EMC	EMCCFD300-BM-BM-6000	50821	Dec. 21, 2015	Dec. 20, 2016
Measurement Software	AUDIX	e3	6.120210k	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Dec. 13, 2015	Dec. 12, 2016
Receiver	R&S	ESR3	101658	Nov. 04, 2015	Nov. 03, 2016
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Aug. 20, 2015	Aug. 19, 2016
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 16, 2015	Dec. 15, 2016
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 04, 2015	Nov. 03, 2016
Preamplifier	Burgeon	BPA-530	SN:100219	Sep. 10, 2015	Sep. 09, 2016
Preamplifier	Agilent	83017A	MY39501308	Oct. 02, 2015	Oct. 01, 2016
Preamplifier	EMC	EMC184045B	980192	Sep. 01, 2015	Aug. 31, 2016
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 10, 2015	Dec. 09, 2016
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 10, 2015	Dec. 09, 2016
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 10, 2015	Dec. 09, 2016
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Dec. 10, 2015	Dec. 09, 2016
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Dec. 10, 2015	Dec. 09, 2016
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Feb. 17, 2016	Feb. 16, 2017
Power Meter	Anritsu	ML2495A	1241002	Sep. 21, 2015	Sep. 20, 2016
Power Sensor	Anritsu	MA2411B	1207366	Sep. 21, 2015	Sep. 20, 2016
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA

Note: Calibration Interval of instruments listed above is one year.



## 1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2013

FCC KDB 558074 D01 DTS Meas Guidance v03r05

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

## 1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±34.134 Hz
Conducted power	±0.808 dB
Power density	±0.463 dB
Conducted emission	±2.670 dB
AC conducted emission	±2.90 dB
Radiated emission ≤ 1GHz	±3.66 dB
Radiated emission > 1GHz	±5.63 dB

## 2 Test Configuration

### 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	21°C / 60%	Howard Huang
Radiated Emissions	03CH01-WS	23°C / 61%	Vincent Yeh
RF Conducted	TH01-WS	23°C / 66%	Alex Huang

➤ FCC site registration No.: 181692

➤ IC site registration No.: 10807A-1

### 2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Configuration
Conducted Emissions	11g	2437	6 Mbps	---
Radiated Emissions ≤1GHz	11g	2437	6 Mbps	---
Radiated Emissions >1GHz	11b	2412 / 2437 / 2462	1 Mbps	---
Maximum Output Power	11g	2412 / 2437 / 2462	6 Mbps	
6dB bandwidth	HT20	2412 / 2437 / 2462	MCS 0	
Power spectral density	HT40	2422 / 2437 / 2452	MCS 0	

## 3 Transmitter Test Results

### 3.1 Conducted Emissions

#### 3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.

#### 3.1.2 Test Procedures


1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.

#### 3.1.3 Test Setup

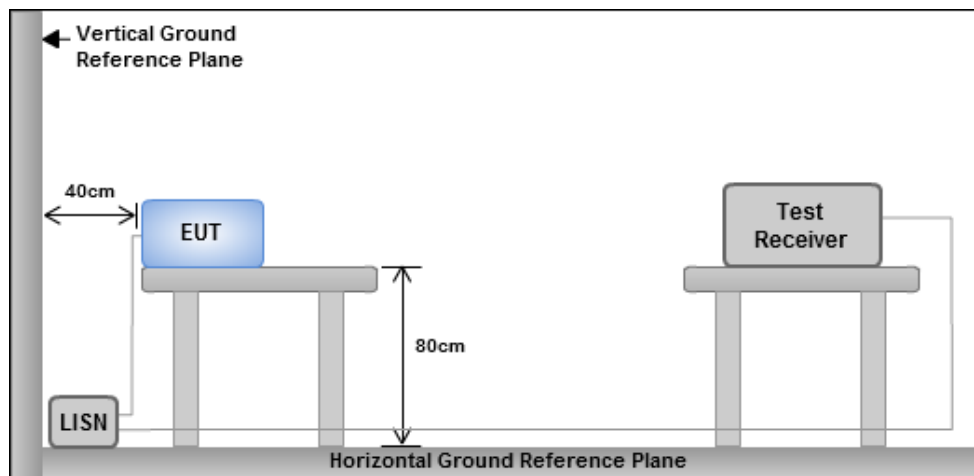


- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.1.4 Test Result of Conducted Emissions

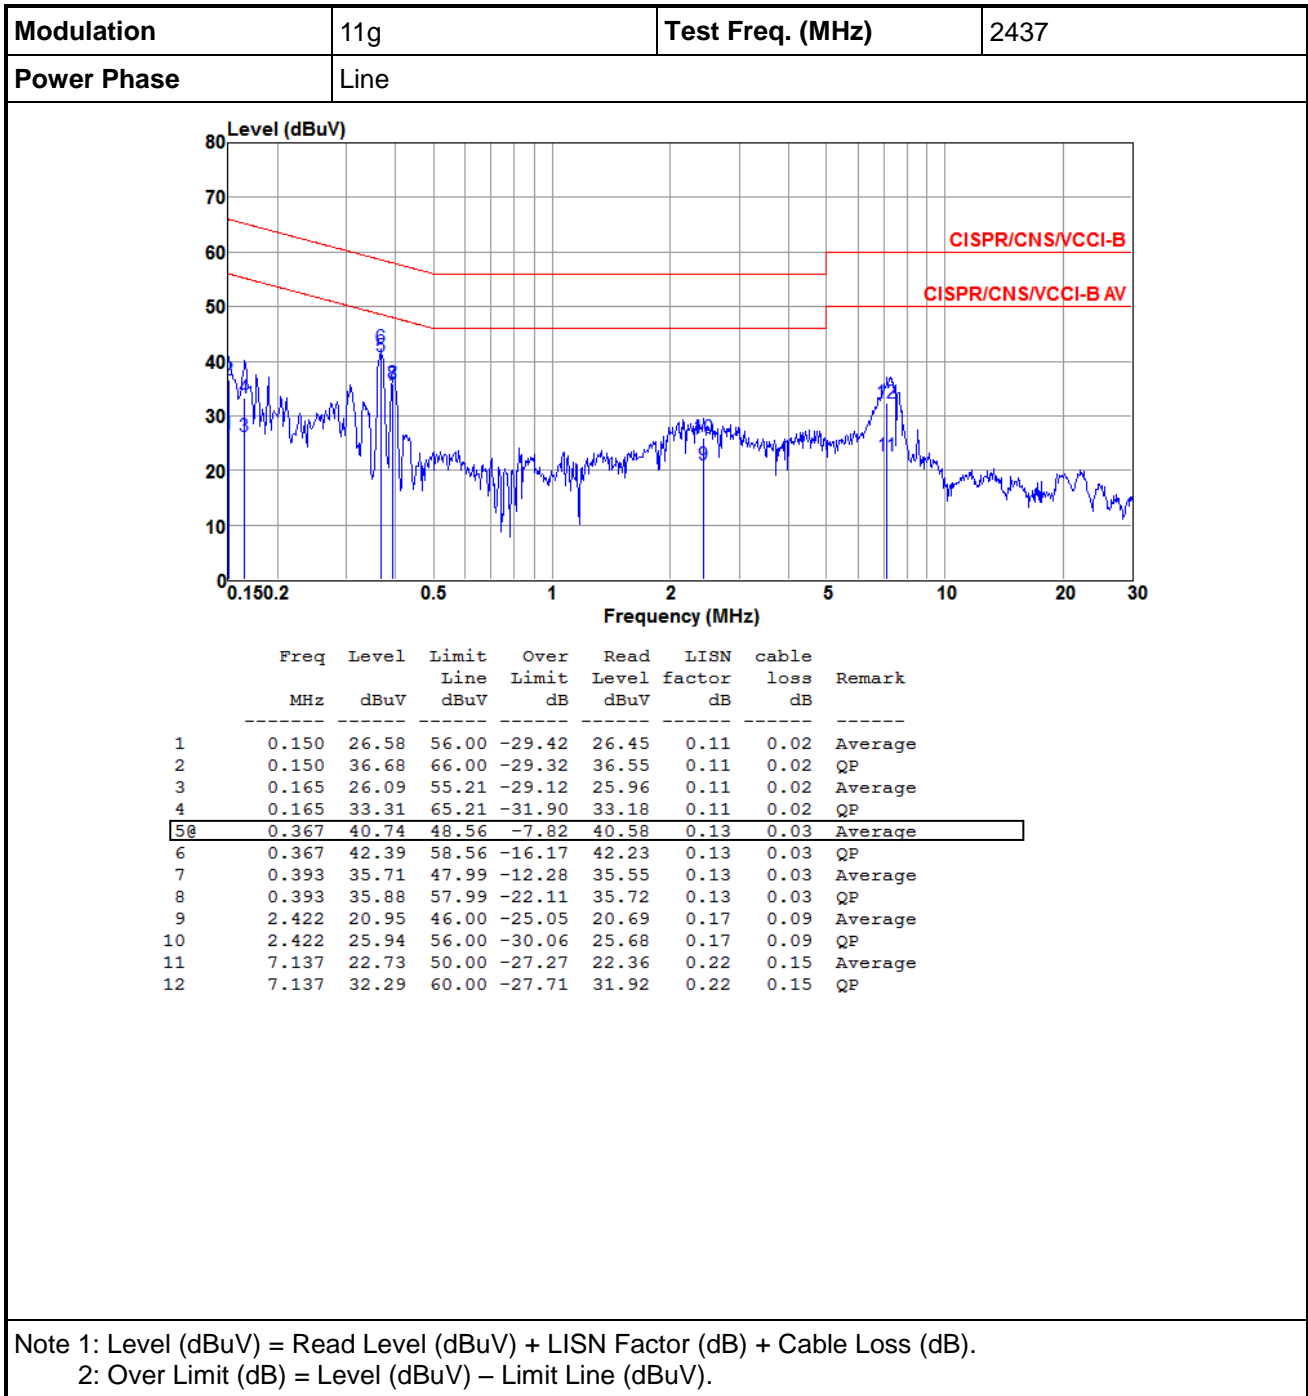

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2437
<b>Power Phase</b>	Neutral		

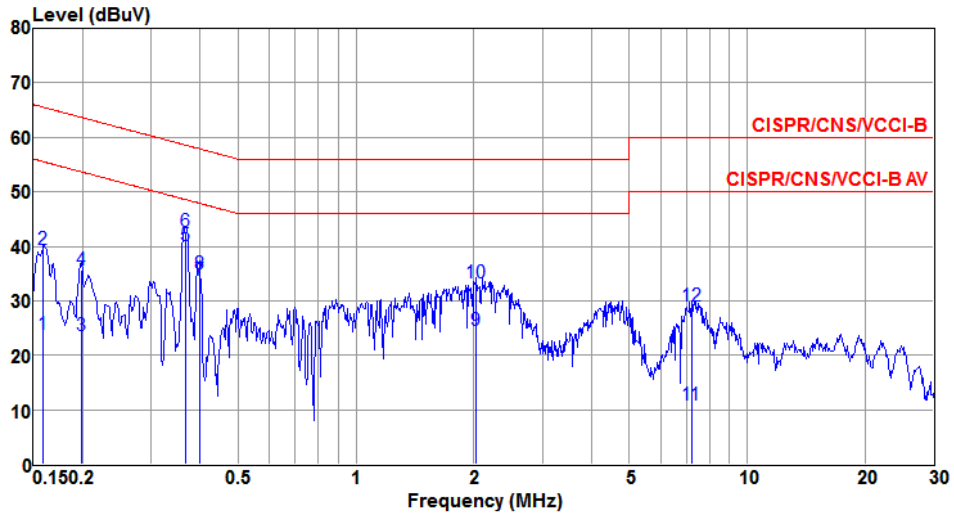

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.159	23.85	55.52	-31.67	23.71	0.12	0.02	Average
2	0.159	39.52	65.52	-26.00	39.38	0.12	0.02	QP
3	0.199	23.63	53.67	-30.04	23.51	0.10	0.02	Average
4	0.199	35.67	63.67	-28.00	35.55	0.10	0.02	QP
5@	0.367	40.21	48.56	-8.35	40.05	0.13	0.03	Average
6	0.367	42.61	58.56	-15.95	42.45	0.13	0.03	QP
7	0.398	33.67	47.90	-14.23	33.50	0.14	0.03	Average
8	0.398	35.00	57.90	-22.90	34.83	0.14	0.03	QP
9	2.033	24.52	46.00	-21.48	24.27	0.17	0.08	Average
10	2.033	33.25	56.00	-22.75	33.00	0.17	0.08	QP
11	7.213	10.94	50.00	-39.06	10.56	0.23	0.15	Average
12	7.213	28.96	60.00	-31.04	28.58	0.23	0.15	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

## 3.2 6dB and Occupied Bandwidth

### 3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

### 3.2.2 Test Procedures


#### 6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

#### Occupied Bandwidth


1. Set resolution bandwidth (RBW) = 1 MHz, Video bandwidth = 3 MHz.
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

### 3.2.3 Test Setup

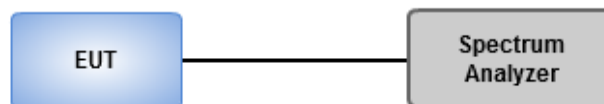


### 3.2.4 Test Result of 6dB and Occupied Bandwidth

Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	6dB Bandwidth (MHz)				Limit (kHz)
			Chain 0	Chain 1	Chain 2	Chain 3	
11b	2	2412	7.07	7.07	---	---	500
11b	2	2437	7.07	7.54	---	---	500
11b	2	2462	7.07	7.54	---	---	500
11g	2	2412	16.58	16.35	---	---	500
11g	2	2437	16.46	16.41	---	---	500
11g	2	2462	16.35	16.35	---	---	500
HT20	2	2412	17.80	17.62	---	---	500
HT20	2	2437	16.41	17.33	---	---	500
HT20	2	2462	17.57	16.70	---	---	500
HT40	2	2422	35.83	36.17	---	---	500
HT40	2	2437	36.41	35.83	---	---	500
HT40	2	2452	35.94	36.06	---	---	500

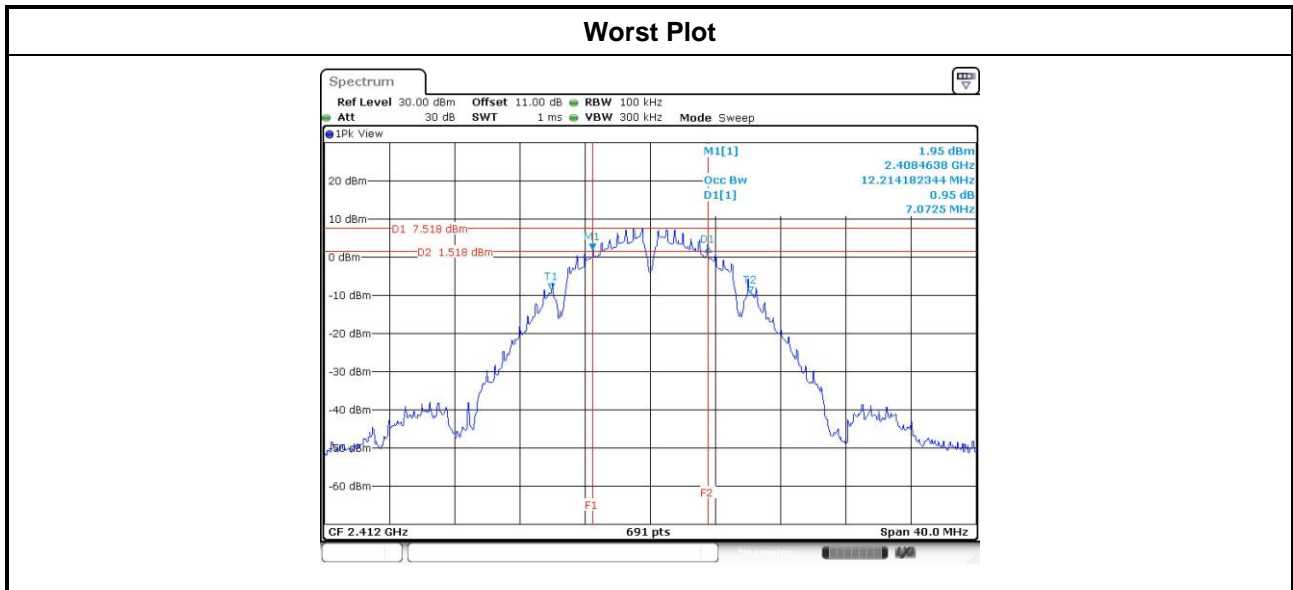

Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	99% Occupied Bandwidth (MHz)			
			Chain 0	Chain 1	Chain 2	Chain 3
11b	2	2412	12.33	12.59	---	---
11b	2	2437	12.35	12.43	---	---
11b	2	2462	12.69	12.73	---	---
11g	2	2412	16.75	16.69	---	---
11g	2	2437	23.48	23.00	---	---
11g	2	2462	16.73	16.63	---	---
HT20	2	2412	17.84	17.81	---	---
HT20	2	2437	22.92	23.51	---	---
HT20	2	2462	17.83	17.81	---	---
HT40	2	2422	36.72	36.69	---	---
HT40	2	2437	36.93	36.91	---	---
HT40	2	2452	36.67	36.69	---	---

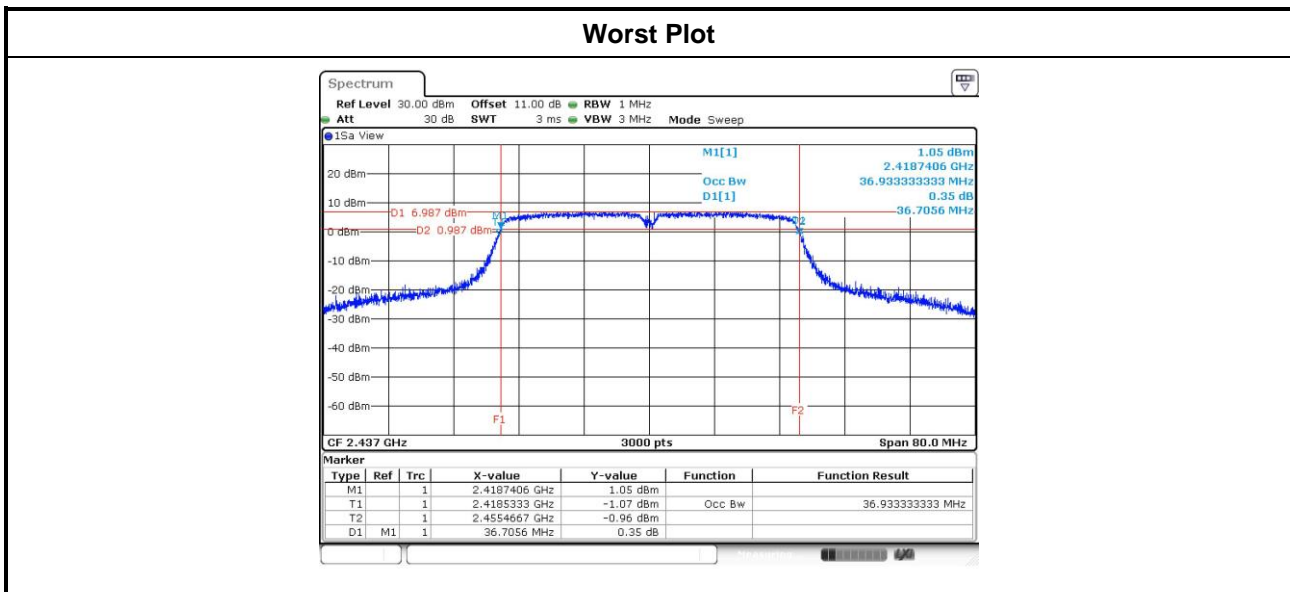



## 3.3 RF Output Power

### 3.3.1 Limit of RF Output Power

Conducted power shall not exceed 1Watt.


- Antenna gain  $\leq$  6dBi, no any corresponding reduction is in output power limit.
- Antenna gain  $>$  6dBi
  - Non Fixed, point to point operations.  
The conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB
  - Fixed, point to point operations  
Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point Operations, maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations ,no any corresponding reduction is in transmitter peak output power

### 3.3.2 Test Procedures

- Maximum Peak Conducted Output Power
  - Spectrum analyzer**
    1. Set RBW = 1MHz, VBW = 3MHz, Detector = Peak.
    2. Sweep time = auto, Trace mode = max hold, Allow trace to fully stabilize.
    3. Use the spectrum analyzer channel power measurement function with the band limits set equal to the DTS bandwidth edges.
  - Power meter**
    1. A broadband Peak RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.
- Maximum Conducted Output Power ( For reference only )
  - Power meter**
    1. A broadband Average RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

### 3.3.3 Test Setup



### 3.3.4 Test Result of Maximum Output Power

Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Peak conducted Output Power (dBm)							Ant. Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3	Total Power (mW)	Total Power (dBm)	Limit (dBm)			
11b	2	2412	18.85	18.25	---	---	143.571	21.57	30.00	4.60	26.17	36.00
11b	2	2437	17.98	18.07	---	---	126.927	21.04	30.00	4.60	25.64	36.00
11b	2	2462	19.68	19.41	---	---	180.194	22.56	30.00	4.60	27.16	36.00
11g	2	2412	17.92	17.8	---	---	122.200	20.87	30.00	4.60	25.47	36.00
11g	2	2437	22.94	22.91	---	---	392.223	<b>25.94</b>	30.00	4.60	30.54	36.00
11g	2	2462	17.13	17.1	---	---	102.928	20.13	30.00	4.60	24.73	36.00
HT20	2	2412	17.65	17.8	---	---	118.466	20.74	30.00	4.60	25.34	36.00
HT20	2	2437	22.79	22.55	---	---	369.995	25.68	30.00	4.60	30.28	36.00
HT20	2	2462	16.33	16.75	---	---	90.269	19.56	30.00	4.60	24.16	36.00
HT40	2	2422	14.3	14.72	---	---	56.564	17.53	30.00	4.60	22.13	36.00
HT40	2	2437	18.57	18.67	---	---	145.566	21.63	30.00	4.60	26.23	36.00
HT40	2	2452	14.38	14.6	---	---	56.256	17.50	30.00	4.60	22.10	36.00

Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Conducted (Average) Output Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3			
11b	2	2412	16.01	15.66	---	---	76.715	18.85	---
11b	2	2437	15.12	15.26	---	---	66.082	18.20	---
11b	2	2462	16.9	16.64	---	---	95.110	19.78	---
11g	2	2412	12.24	12.18	---	---	33.269	15.22	---
11g	2	2437	19.1	19.21	---	---	164.651	<b>22.17</b>	---
11g	2	2462	11.36	11.5	---	---	27.803	14.44	---
HT20	2	2412	11.9	12.2	---	---	32.084	15.06	---
HT20	2	2437	19	18.73	---	---	154.078	21.88	---
HT20	2	2462	10.51	11.09	---	---	24.099	13.82	---
HT40	2	2422	8.39	8.95	---	---	14.755	11.69	---
HT40	2	2437	13.08	13.32	---	---	41.802	16.21	---
HT40	2	2452	8.48	8.8	---	---	14.633	11.65	---

Note: Conducted average output power is for reference only.

## 3.4 Power Spectral Density


### 3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

### 3.4.2 Test Procedures

- Maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit.
  1. Set the RBW = 3kHz, VBW = 10kHz.
  2. Detector = Peak, Sweep time = auto couple.
  3. Trace mode = max hold, allow trace to fully stabilize.
  4. Use the peak marker function to determine the maximum amplitude level.
- Maximum (average) conducted output power was used to demonstrate compliance to the fundamental output power limit.
  1. Set the RBW = 100kHz, VBW = 300 kHz.
  2. Detector = RMS, Sweep time = auto couple.
  3. Set the sweep time to:  $\geq 10 \times$  (number of measurement points in sweep)  $\times$  (maximum data rate per stream).
  4. Perform the measurement over a single sweep.
  5. Use the peak marker function to determine the maximum amplitude level.


### 3.4.3 Test Setup



### 3.4.4 Test Result of Power Spectral Density

Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Total Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
11b	2	2412	-2.90	8.00
11b	2	2437	-3.33	8.00
11b	2	2462	-1.97	8.00
11g	2	2412	-10.45	8.00
11g	2	2437	1.66	8.00
11g	2	2462	-10.58	8.00
HT20	2	2412	-9.94	8.00
HT20	2	2437	1.72	8.00
HT20	2	2462	-11.59	8.00
HT40	2	2422	-15.27	8.00
HT40	2	2437	-12.89	8.00
HT40	2	2452	-16.53	8.00

Note: Test result is bin-by-bin summing measured value of each TX port.

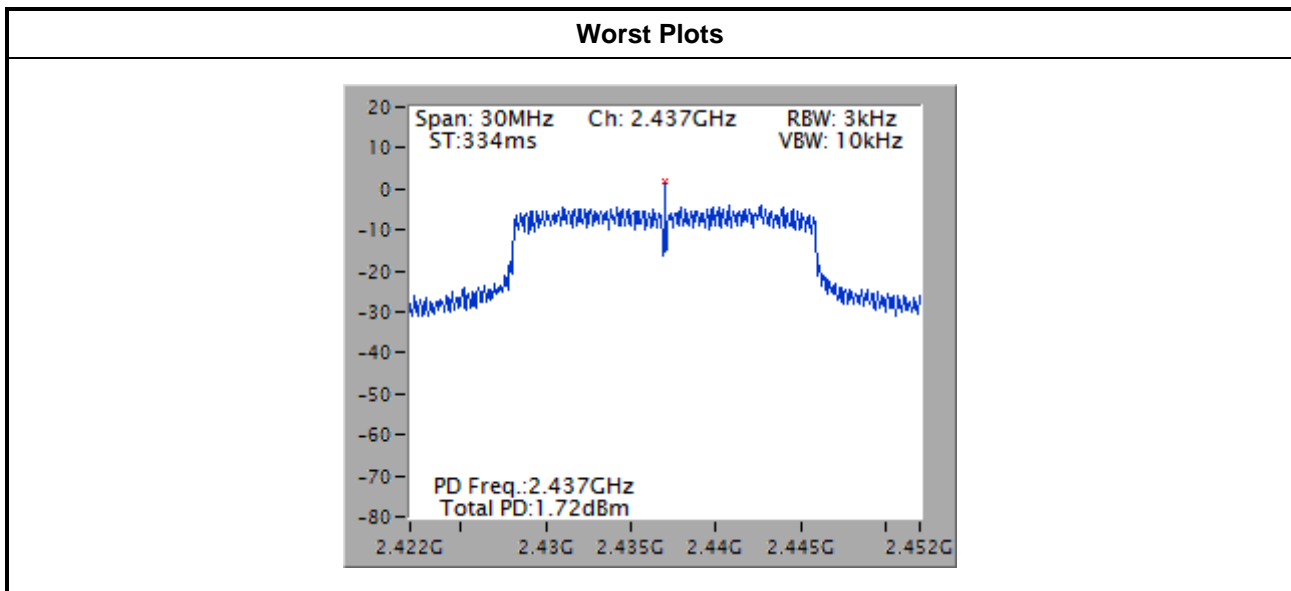

## 3.5 Unwanted Emissions into Restricted Frequency Bands

### 3.5.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

**Note 1:**  
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

### 3.5.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

### 3.5.3 Test Setup


#### Radiated Emissions below 1 GHz

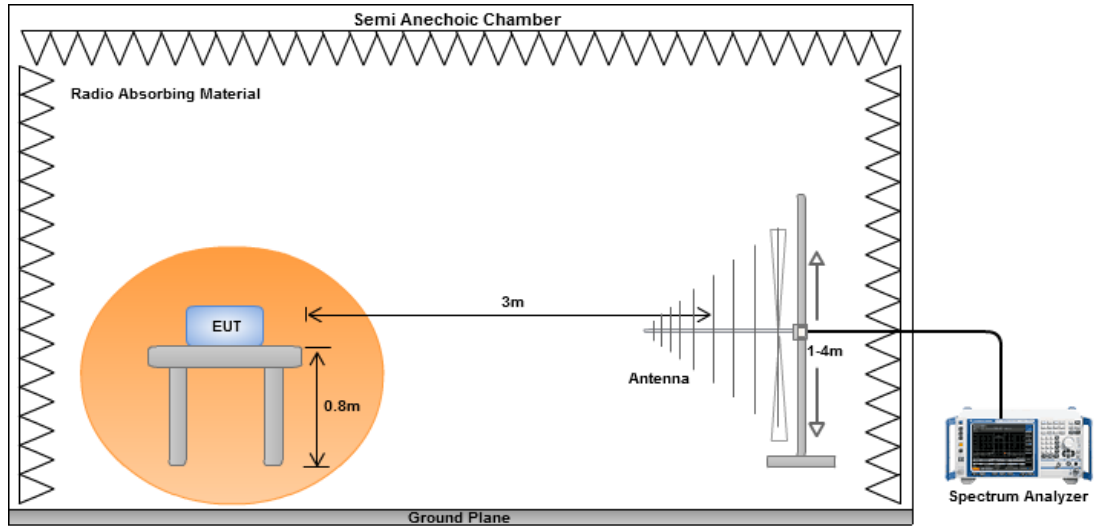


#### Radiated Emissions above 1 GHz

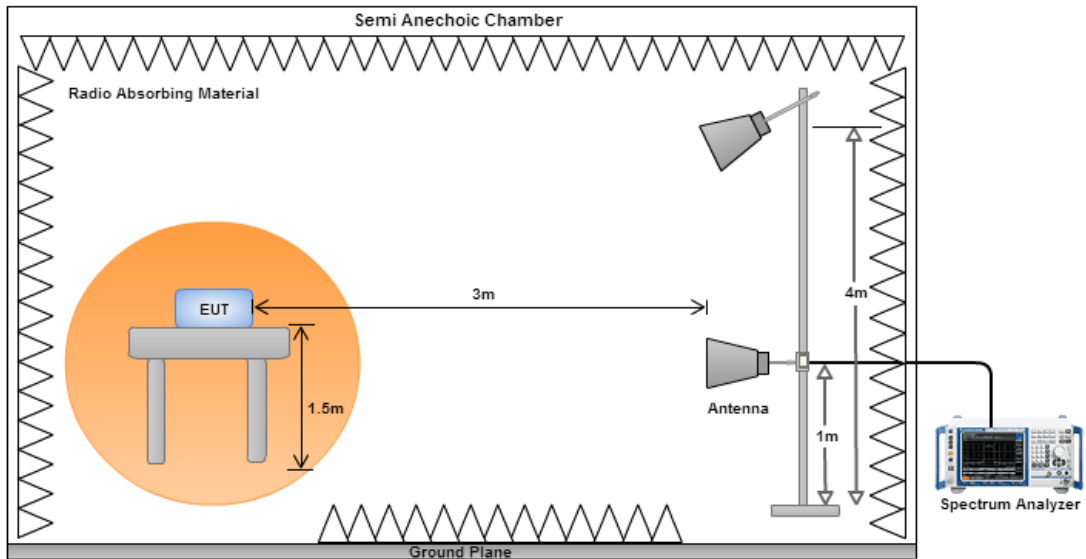

### 3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

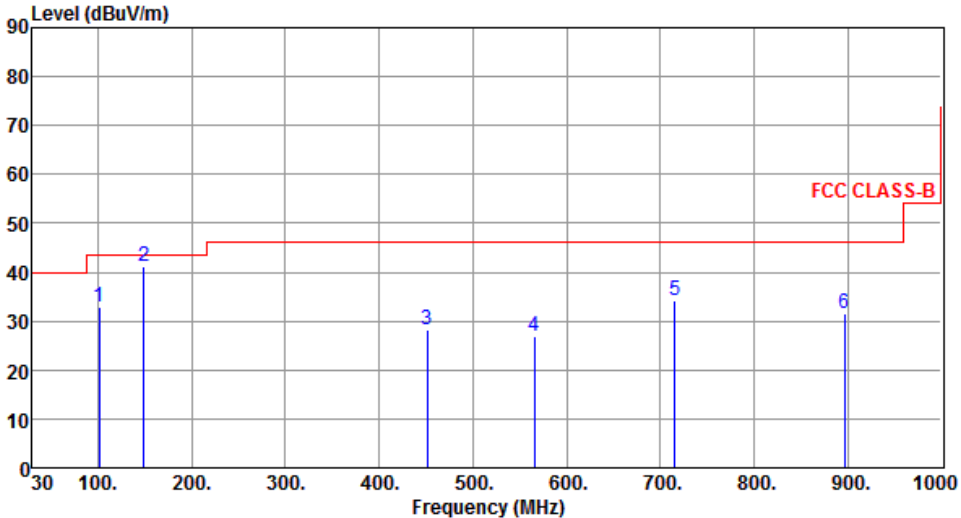Modulation	11g	Test Freq. (MHz)	2437						
Polarization	Horizontal								
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	101.78	32.87	43.50	-10.63	49.00	-16.13	Peak	---	---
2	149.31	41.12	43.50	-2.38	52.87	-11.75	QP	100	180
3	450.98	28.08	46.00	-17.92	35.43	-7.35	Peak	---	---
4	565.44	26.79	46.00	-19.21	31.94	-5.15	Peak	---	---
5	715.79	34.11	46.00	-11.89	36.91	-2.80	Peak	---	---
6	896.21	31.68	46.00	-14.32	32.16	-0.48	Peak	---	---
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).            Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>									

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

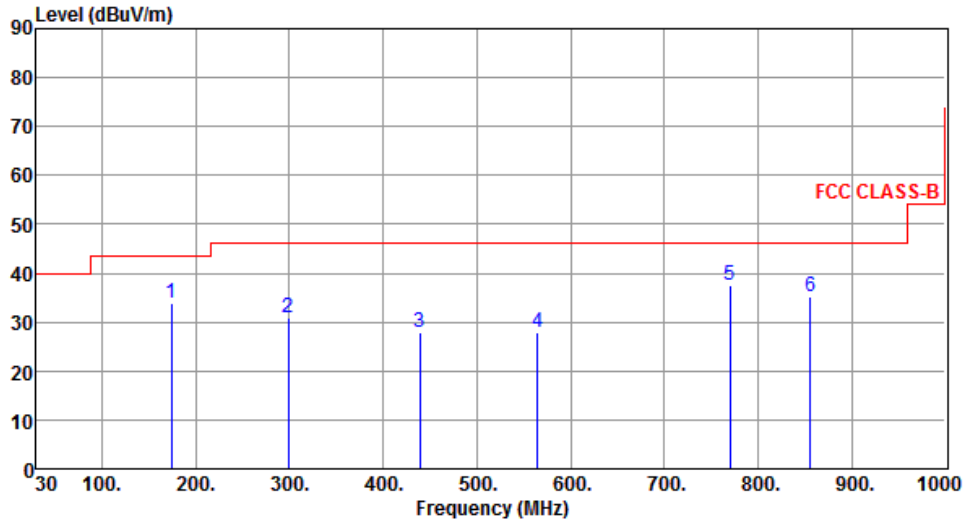

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	174.53	33.73	43.50	-9.77	46.11	-12.38	Peak	---	---
2	298.69	30.85	46.00	-15.15	41.86	-11.01	Peak	---	---
3	439.34	28.00	46.00	-18.00	35.61	-7.61	Peak	---	---
4	564.47	27.90	46.00	-18.10	33.07	-5.17	Peak	---	---
5	770.11	37.56	46.00	-8.44	39.59	-2.03	Peak	---	---
6	855.47	35.08	46.00	-10.92	36.08	-1.00	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



### 3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11b

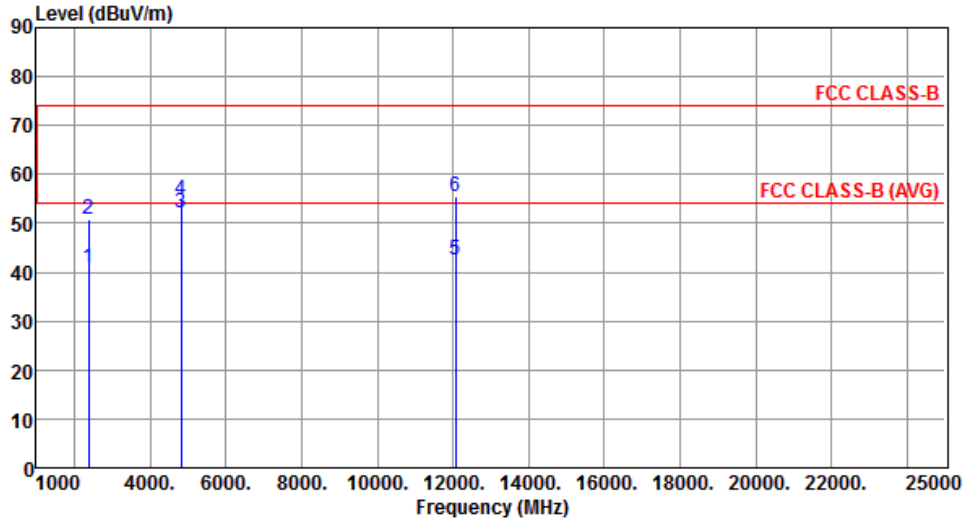Modulation	11b	Test Freq. (MHz)	2412						
Polarization	Horizontal								
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	40.97	54.00	-13.03	44.32	-3.35	Average	203	300
2	2390.00	50.71	74.00	-23.29	54.06	-3.35	Peak	203	300
3	4824.00	52.06	54.00	-1.94	48.47	3.59	Average	111	79
4	4824.00	54.71	74.00	-19.29	51.12	3.59	Peak	111	79
5	12060.00	42.65	54.00	-11.35	28.52	14.13	Average	104	216
6	12060.00	55.54	74.00	-18.46	41.41	14.13	Peak	104	216
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2412
<b>Polarization</b>	Vertical		

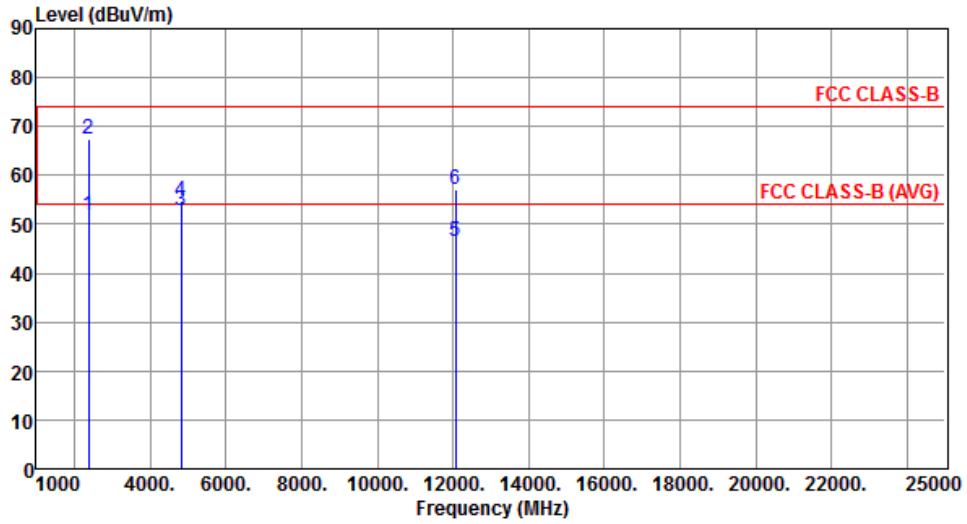


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	51.84	54.00	-2.16	55.19	-3.35	Average	194	104
2	2390.00	67.37	74.00	-6.63	70.72	-3.35	Peak	194	104
3	4824.00	52.70	54.00	-1.30	49.11	3.59	Average	374	67
4	4824.00	54.84	74.00	-19.16	51.25	3.59	Peak	374	67
5	12060.00	46.36	54.00	-7.64	32.23	14.13	Average	240	138
6	12060.00	57.15	74.00	-16.85	43.02	14.13	Peak	240	138

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Horizontal		

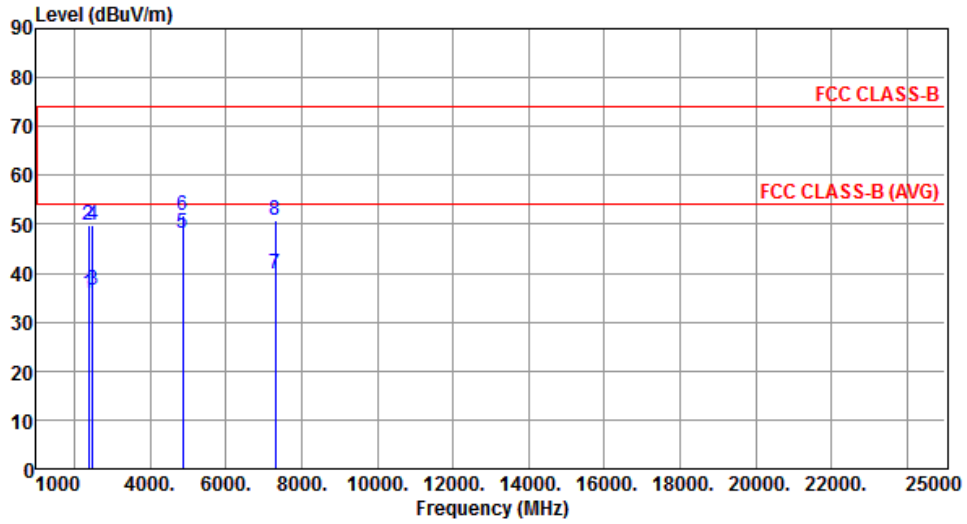


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	36.01	54.00	-17.99	39.36	-3.35	Average	100	303
2	2390.00	49.95	74.00	-24.05	53.30	-3.35	Peak	100	303
3	2483.50	36.50	54.00	-17.50	39.43	-2.93	Average	100	106
4	2483.50	49.91	74.00	-24.09	52.84	-2.93	Peak	100	106
5	4874.00	48.16	54.00	-5.84	44.41	3.75	Average	113	113
6	4874.00	51.97	74.00	-22.03	48.22	3.75	Peak	113	113
7	7311.00	39.74	54.00	-14.26	31.32	8.42	Average	100	106
8	7311.00	50.90	74.00	-23.10	42.48	8.42	Peak	100	106

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

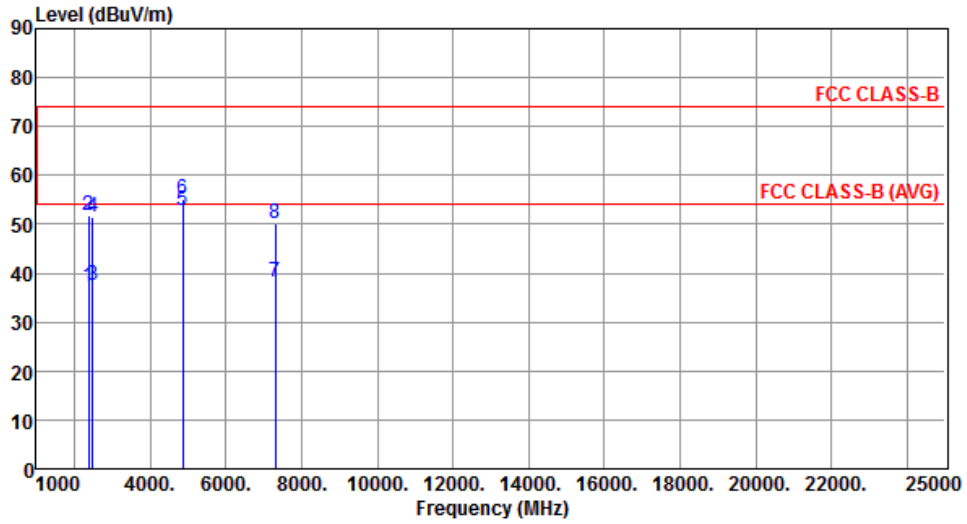


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.31	54.00	-16.69	40.66	-3.35	Average	226	81
2	2390.00	51.67	74.00	-22.33	55.02	-3.35	Peak	226	81
3	2483.50	37.52	54.00	-16.48	40.45	-2.93	Average	226	81
4	2483.50	51.51	74.00	-22.49	54.44	-2.93	Peak	226	81
5	4874.00	52.66	54.00	-1.34	48.91	3.75	Average	254	107
6	4874.00	55.19	74.00	-18.81	51.44	3.75	Peak	254	107
7	7311.00	38.29	54.00	-15.71	29.87	8.42	Average	174	306
8	7311.00	50.31	74.00	-23.69	41.89	8.42	Peak	174	306

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Horizontal		

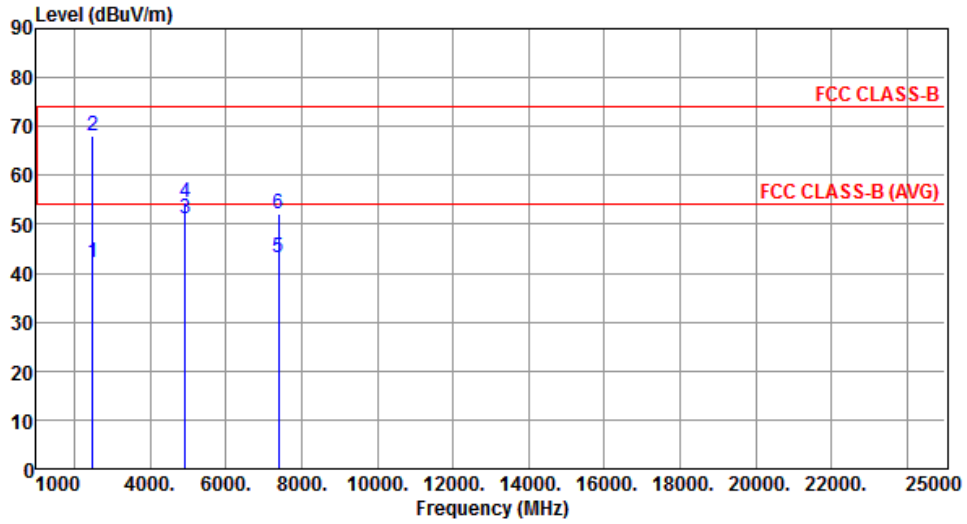


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	42.03	54.00	-11.97	44.96	-2.93	Average	186	76
2	2483.50	68.11	74.00	-5.89	71.04	-2.93	Peak	186	76
3	4924.00	51.26	54.00	-2.74	47.35	3.91	Average	183	82
4	4924.00	54.47	74.00	-19.53	50.56	3.91	Peak	183	82
5	7386.00	43.06	54.00	-10.94	34.60	8.46	Average	191	69
6	7386.00	52.29	74.00	-21.71	43.83	8.46	Peak	191	69

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Vertical		

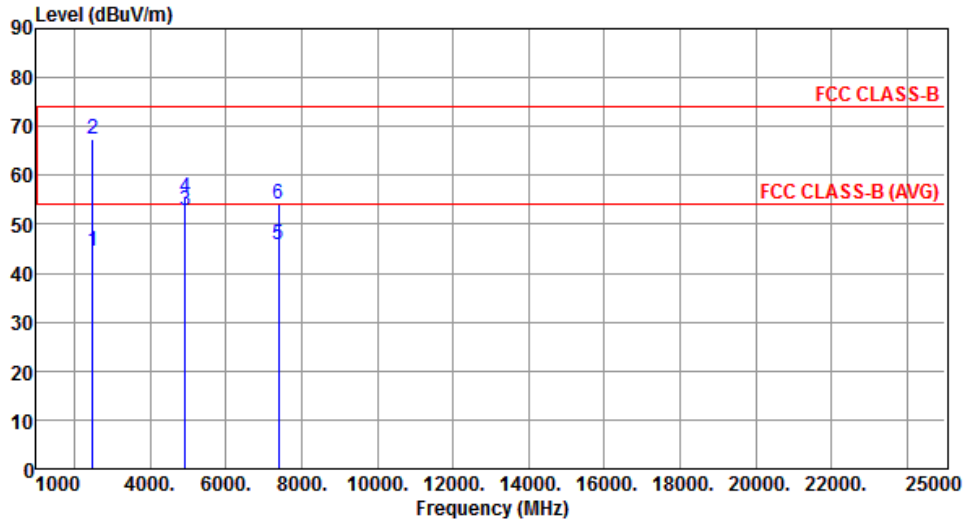


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	44.66	54.00	-9.34	47.59	-2.93	Average	210	91
2	2483.50	67.46	74.00	-6.54	70.39	-2.93	Peak	210	91
3	4924.00	52.69	54.00	-1.31	48.78	3.91	Average	178	70
4	4924.00	55.42	74.00	-18.58	51.51	3.91	Peak	178	70
5	7386.00	45.68	54.00	-8.32	37.22	8.46	Average	164	86
6	7386.00	54.06	74.00	-19.94	45.60	8.46	Peak	164	86

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### 3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11g

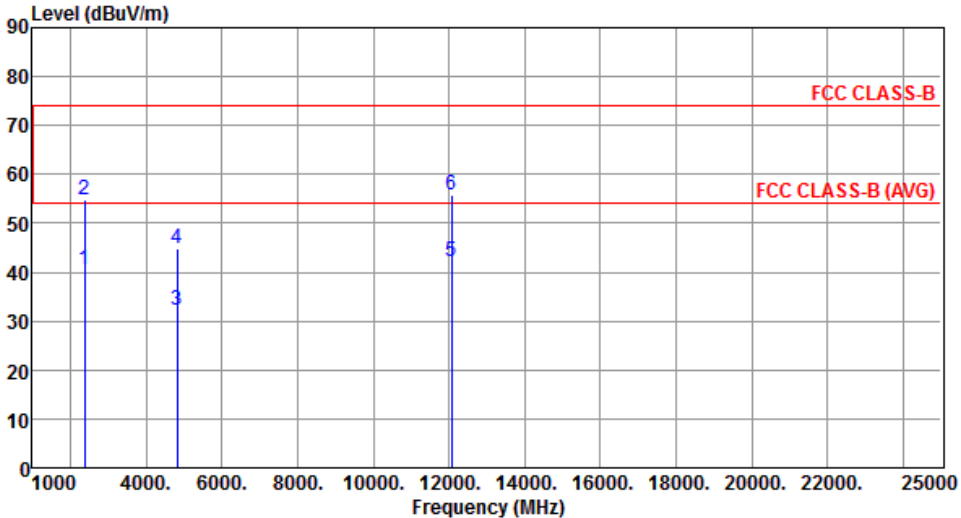Modulation	11g	Test Freq. (MHz)	2412						
Polarization	Horizontal								
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	40.38	54.00	-13.62	43.73	-3.35	Average	174	300
2	2390.00	54.96	74.00	-19.04	58.31	-3.35	Peak	174	300
3	4824.00	32.16	54.00	-21.84	28.57	3.59	Average	144	80
4	4824.00	44.94	74.00	-29.06	41.35	3.59	Peak	144	80
5	12060.00	42.31	54.00	-11.69	28.18	14.13	Average	128	56
6	12060.00	55.65	74.00	-18.35	41.52	14.13	Peak	128	56
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2412
<b>Polarization</b>	Vertical		

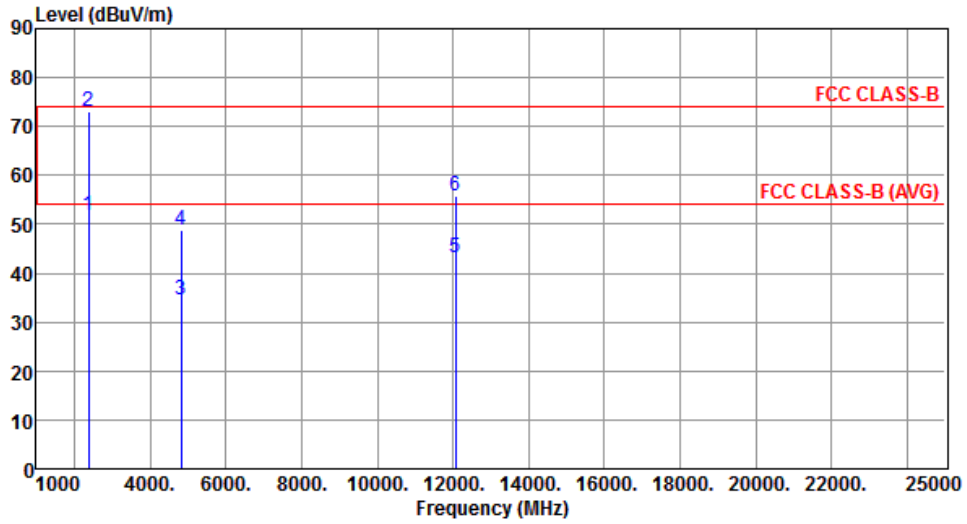

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	51.87	54.00	-2.13	55.22	-3.35	Average	193	92
2	2390.00	72.98	74.00	-1.02	76.33	-3.35	Peak	193	92
3	4824.00	34.59	54.00	-19.41	31.00	3.59	Average	220	113
4	4824.00	48.94	74.00	-25.06	45.35	3.59	Peak	220	113
5	12060.00	43.14	54.00	-10.86	29.01	14.13	Average	100	146
6	12060.00	55.85	74.00	-18.15	41.72	14.13	Peak	100	146


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Horizontal		

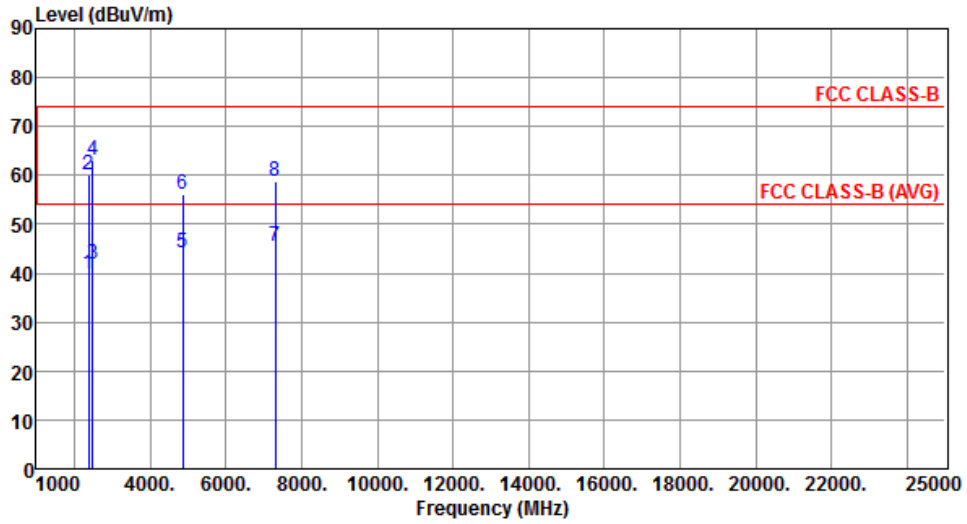


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.69	54.00	-14.31	43.04	-3.35	Average	100	301
2	2390.00	60.27	74.00	-13.73	63.62	-3.35	Peak	100	301
3	2483.50	41.87	54.00	-12.13	44.80	-2.93	Average	100	301
4	2483.50	63.06	74.00	-10.94	65.99	-2.93	Peak	100	301
5	4874.00	44.26	54.00	-9.74	40.51	3.75	Average	103	115
6	4874.00	56.26	74.00	-17.74	52.51	3.75	Peak	103	115
7	7311.00	45.43	54.00	-8.57	37.01	8.42	Average	100	79
8	7311.00	58.81	74.00	-15.19	50.39	8.42	Peak	100	79

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

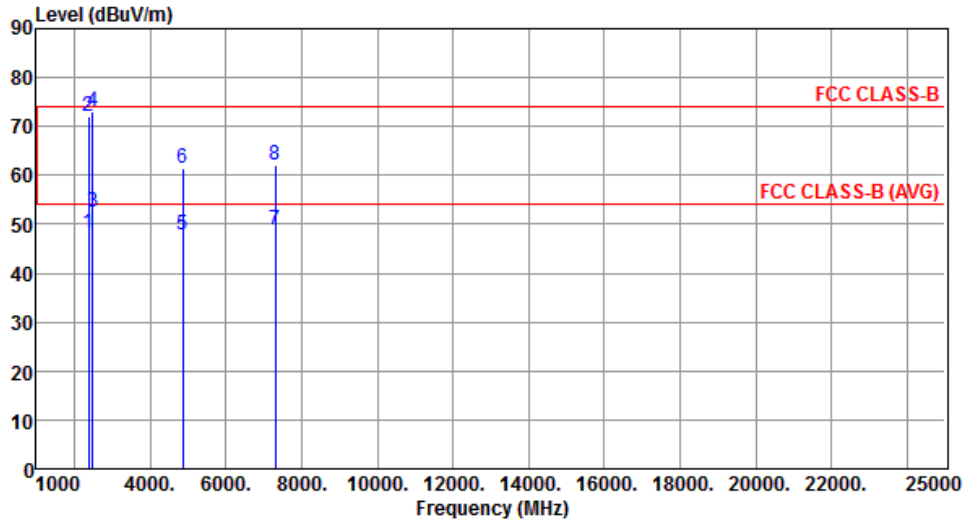


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	48.24	54.00	-5.76	51.59	-3.35	Average	219	90
2	2390.00	72.16	74.00	-1.84	75.51	-3.35	Peak	219	90
3	2483.50	52.57	54.00	-1.43	55.50	-2.93	Average	219	82
4	2483.50	72.92	74.00	-1.08	75.85	-2.93	Peak	219	82
5	4874.00	47.88	54.00	-6.12	44.13	3.75	Average	259	111
6	4874.00	61.47	74.00	-12.53	57.72	3.75	Peak	259	111
7	7311.00	48.83	54.00	-5.17	40.41	8.42	Average	261	90
8	7311.00	62.00	74.00	-12.00	53.58	8.42	Peak	261	90

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Horizontal		

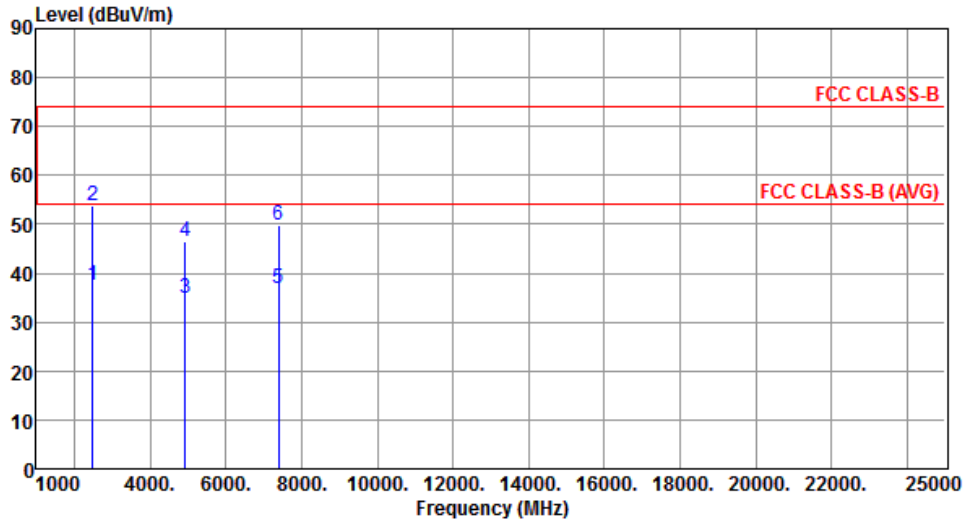


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	37.68	54.00	-16.32	40.61	-2.93	Average	140	303
2	2483.50	53.74	74.00	-20.26	56.67	-2.93	Peak	140	303
3	4924.00	34.78	54.00	-19.22	30.87	3.91	Average	135	207
4	4924.00	46.55	74.00	-27.45	42.64	3.91	Peak	135	207
5	7386.00	36.72	54.00	-17.28	28.26	8.46	Average	175	117
6	7386.00	49.72	74.00	-24.28	41.26	8.46	Peak	175	117

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Vertical		

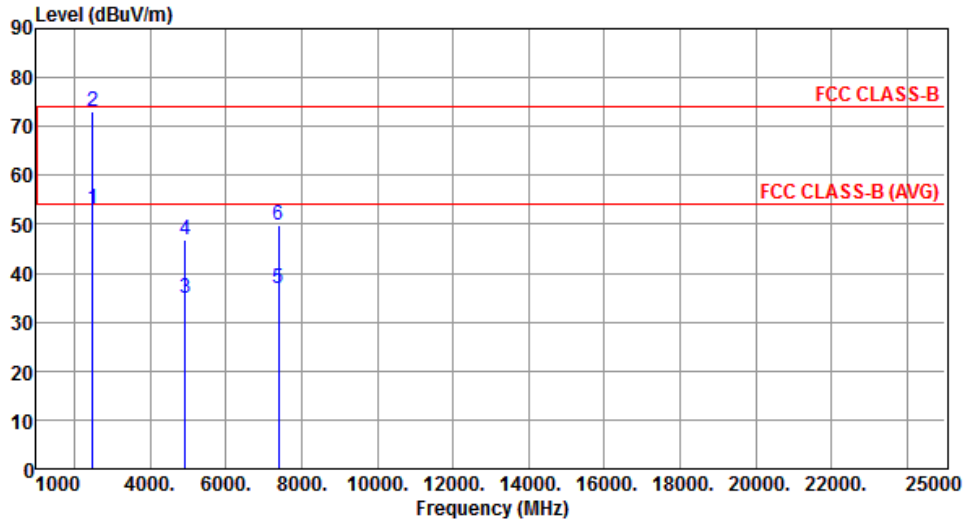


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	52.99	54.00	-1.01	55.92	-2.93	Average	186	79
2	2483.50	72.97	74.00	-1.03	75.90	-2.93	Peak	186	79
3	4924.00	34.84	54.00	-19.16	30.93	3.91	Average	193	71
4	4924.00	46.72	74.00	-27.28	42.81	3.91	Peak	193	71
5	7386.00	36.86	54.00	-17.14	28.40	8.46	Average	100	93
6	7386.00	49.87	74.00	-24.13	41.41	8.46	Peak	100	93

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### 3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

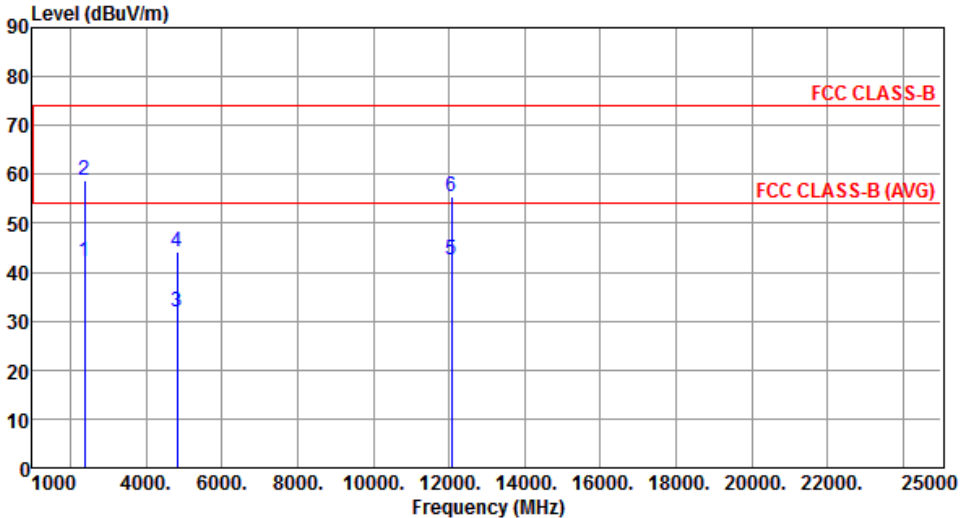Modulation	HT20	Test Freq. (MHz)	2412						
Polarization	Horizontal								
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	42.03	54.00	-11.97	45.38	-3.35	Average	135	36
2	2390.00	58.74	74.00	-15.26	62.09	-3.35	Peak	135	36
3	4824.00	31.76	54.00	-22.24	28.17	3.59	Average	126	155
4	4824.00	44.11	74.00	-29.89	40.52	3.59	Peak	126	155
5	12060.00	42.47	54.00	-11.53	28.34	14.13	Average	173	86
6	12060.00	55.45	74.00	-18.55	41.32	14.13	Peak	173	86
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2412
<b>Polarization</b>	Vertical		

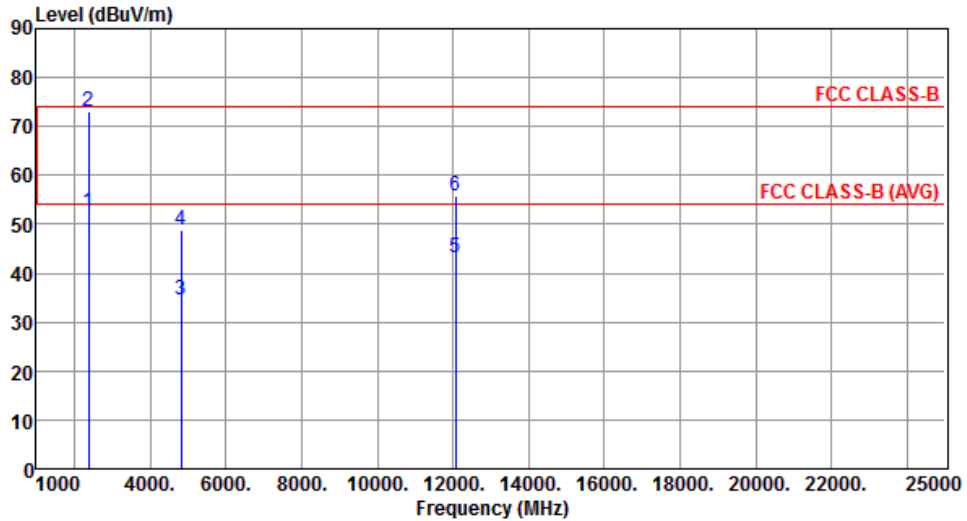


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	52.62	54.00	-1.38	55.97	-3.35	Average	183	0
2	2390.00	72.99	74.00	-1.01	76.34	-3.35	Peak	183	0
3	4824.00	34.49	54.00	-19.51	30.90	3.59	Average	215	119
4	4824.00	48.87	74.00	-25.13	45.28	3.59	Peak	215	119
5	12060.00	43.05	54.00	-10.95	28.92	14.13	Average	100	156
6	12060.00	55.68	74.00	-18.32	41.55	14.13	Peak	100	156

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Horizontal		

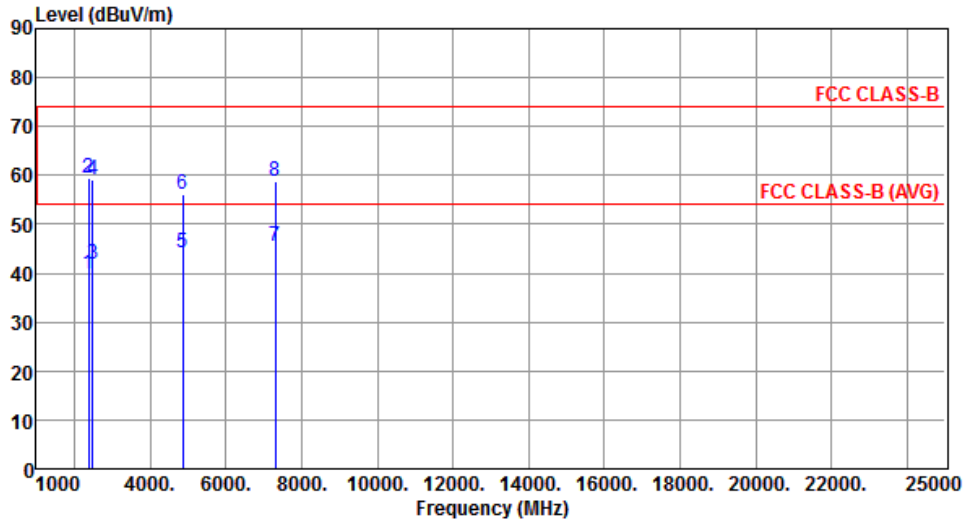


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.88	54.00	-14.12	43.23	-3.35	Average	100	303
2	2390.00	59.43	74.00	-14.57	62.78	-3.35	Peak	100	303
3	2483.50	41.77	54.00	-12.23	44.70	-2.93	Average	100	296
4	2483.50	59.04	74.00	-14.96	61.97	-2.93	Peak	100	296
5	4874.00	44.19	54.00	-9.81	40.44	3.75	Average	100	116
6	4874.00	56.20	74.00	-17.80	52.45	3.75	Peak	100	116
7	7311.00	45.38	54.00	-8.62	36.96	8.42	Average	100	85
8	7311.00	58.77	74.00	-15.23	50.35	8.42	Peak	100	85

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

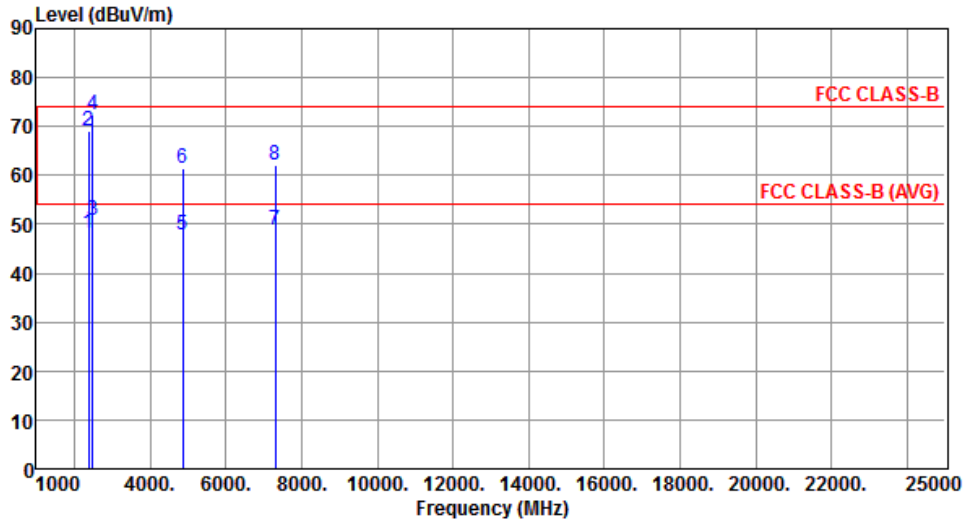

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	48.24	54.00	-5.76	51.59	-3.35	Average	213	66
2	2390.00	69.16	74.00	-4.84	72.51	-3.35	Peak	213	66
3	2483.50	50.76	54.00	-3.24	53.69	-2.93	Average	213	143
4	2483.50	72.56	74.00	-1.44	75.49	-2.93	Peak	213	143
5	4874.00	47.93	54.00	-6.07	44.18	3.75	Average	263	110
6	4874.00	61.54	74.00	-12.46	57.79	3.75	Peak	263	110
7	7311.00	48.89	54.00	-5.11	40.47	8.42	Average	256	90
8	7311.00	62.13	74.00	-11.87	53.71	8.42	Peak	256	90


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Horizontal		

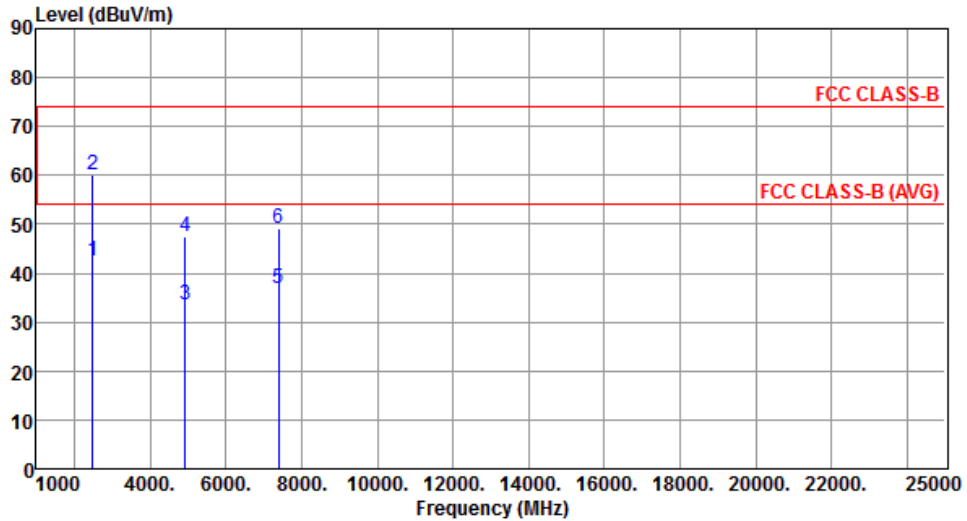


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	42.50	54.00	-11.50	45.43	-2.93	Average	137	303
2	2483.50	60.19	74.00	-13.81	63.12	-2.93	Peak	137	303
3	4924.00	33.67	54.00	-20.33	29.76	3.91	Average	196	145
4	4924.00	47.45	74.00	-26.55	43.54	3.91	Peak	196	145
5	7386.00	36.75	54.00	-17.25	28.29	8.46	Average	201	284
6	7386.00	49.23	74.00	-24.77	40.77	8.46	Peak	201	284

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Vertical		

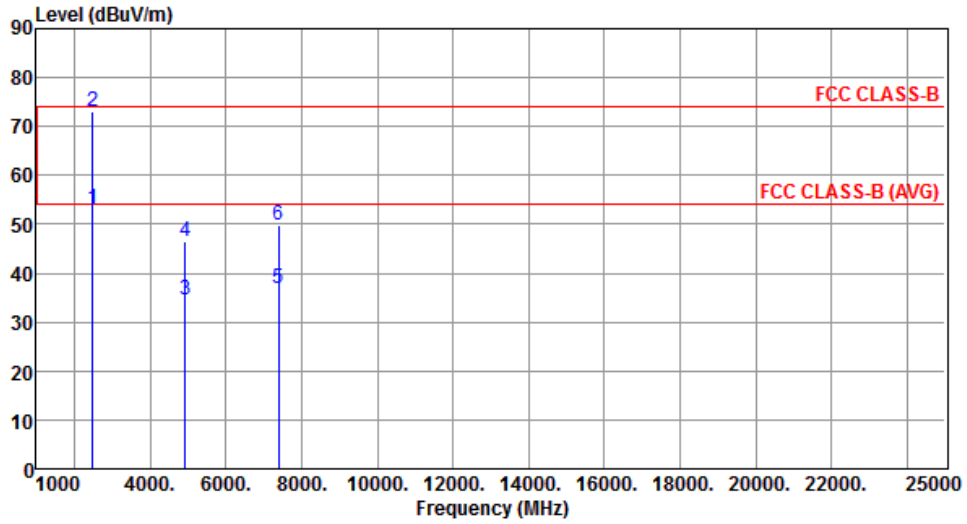


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	52.99	54.00	-1.01	55.92	-2.93	Average	192	93
2	2483.50	72.97	74.00	-1.03	75.90	-2.93	Peak	192	93
3	4924.00	34.51	54.00	-19.49	30.60	3.91	Average	198	72
4	4924.00	46.62	74.00	-27.38	42.71	3.91	Peak	198	72
5	7386.00	36.70	54.00	-17.30	28.24	8.46	Average	100	86
6	7386.00	49.68	74.00	-24.32	41.22	8.46	Peak	100	86

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### 3.5.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40

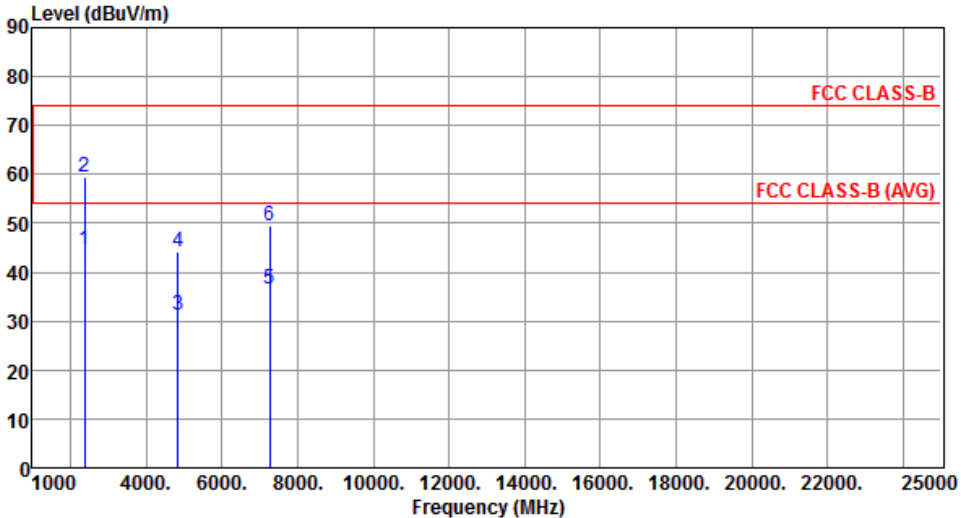Modulation	HT40	Test Freq. (MHz)	2422						
Polarization	Horizontal								
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	44.66	54.00	-9.34	48.01	-3.35	Average	114	292
2	2390.00	59.56	74.00	-14.44	62.91	-3.35	Peak	114	292
3	4844.00	31.15	54.00	-22.85	27.49	3.66	Average	100	134
4	4844.00	44.09	74.00	-29.91	40.43	3.66	Peak	100	134
5	7266.00	36.69	54.00	-17.31	28.27	8.42	Average	100	238
6	7266.00	49.35	74.00	-24.65	40.93	8.42	Peak	100	238

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)  
\*Factor includes antenna factor , cable loss and amplifier gain  
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	2422
<b>Polarization</b>	Vertical		

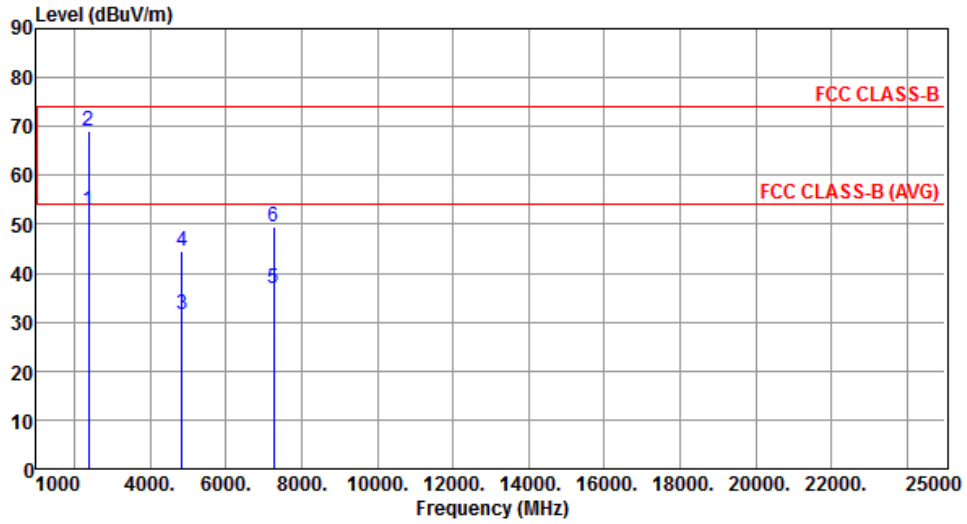


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	52.96	54.00	-1.04	56.31	-3.35	Average	211	11
2	2390.00	69.01	74.00	-4.99	72.36	-3.35	Peak	211	11
3	4844.00	31.58	54.00	-22.42	27.92	3.66	Average	100	201
4	4844.00	44.46	74.00	-29.54	40.80	3.66	Peak	100	201
5	7266.00	36.86	54.00	-17.14	28.44	8.42	Average	100	234
6	7266.00	49.52	74.00	-24.48	41.10	8.42	Peak	100	234

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Horizontal		

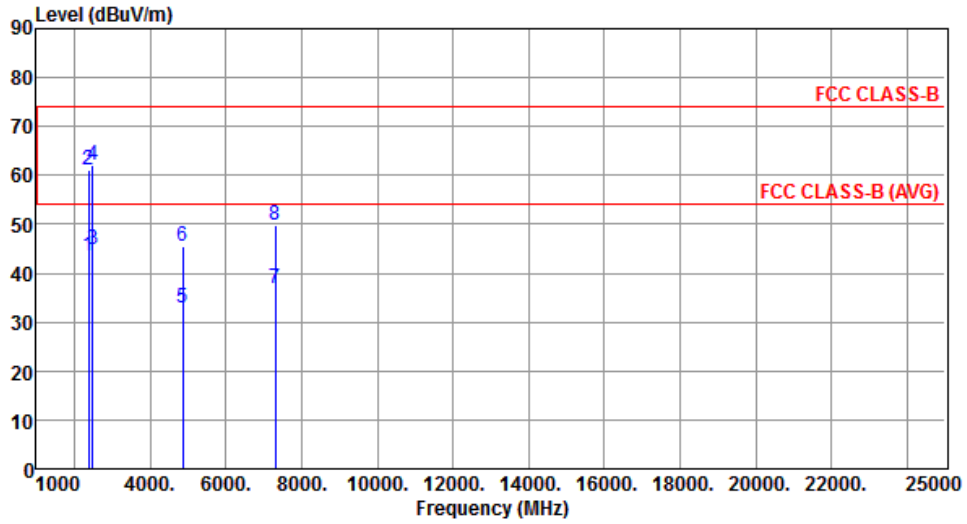


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	43.35	54.00	-10.65	46.70	-3.35	Average	116	300
2	2390.00	61.08	74.00	-12.92	64.43	-3.35	Peak	116	300
3	2483.50	44.87	54.00	-9.13	47.80	-2.93	Average	116	300
4	2483.50	62.22	74.00	-11.78	65.15	-2.93	Peak	116	300
5	4874.00	32.80	54.00	-21.20	29.05	3.75	Average	100	115
6	4874.00	45.54	74.00	-28.46	41.79	3.75	Peak	100	115
7	7311.00	37.03	54.00	-16.97	28.61	8.42	Average	100	227
8	7311.00	49.87	74.00	-24.13	41.45	8.42	Peak	100	227

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

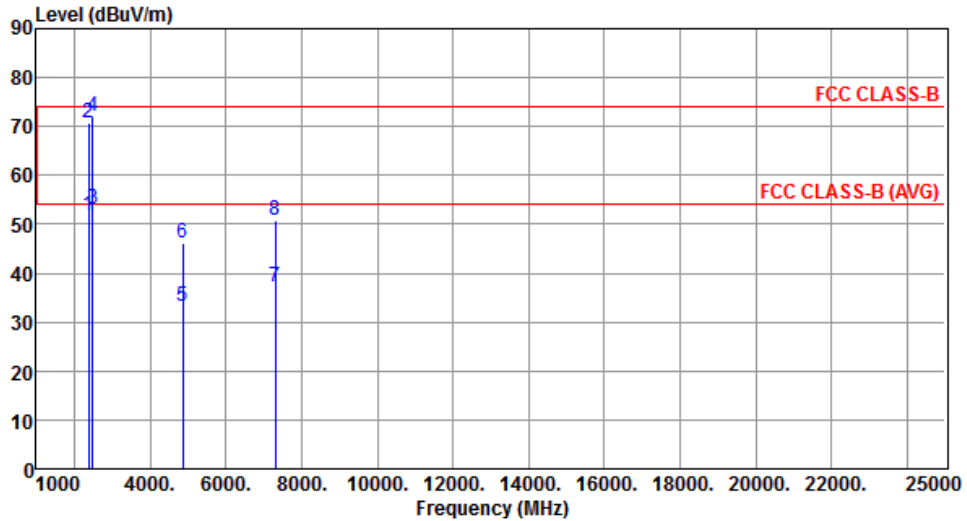


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	51.93	54.00	-2.07	55.28	-3.35	Average	182	275
2	2390.00	70.86	74.00	-3.14	74.21	-3.35	Peak	182	275
3	2483.50	52.99	54.00	-1.01	55.92	-2.93	Average	182	275
4	2483.50	72.18	74.00	-1.82	75.11	-2.93	Peak	182	275
5	4874.00	33.36	54.00	-20.64	29.61	3.75	Average	100	350
6	4874.00	46.14	74.00	-27.86	42.39	3.75	Peak	100	350
7	7311.00	37.11	54.00	-16.89	28.69	8.42	Average	100	138
8	7311.00	50.92	74.00	-23.08	42.50	8.42	Peak	100	138

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	2452
<b>Polarization</b>	Horizontal		

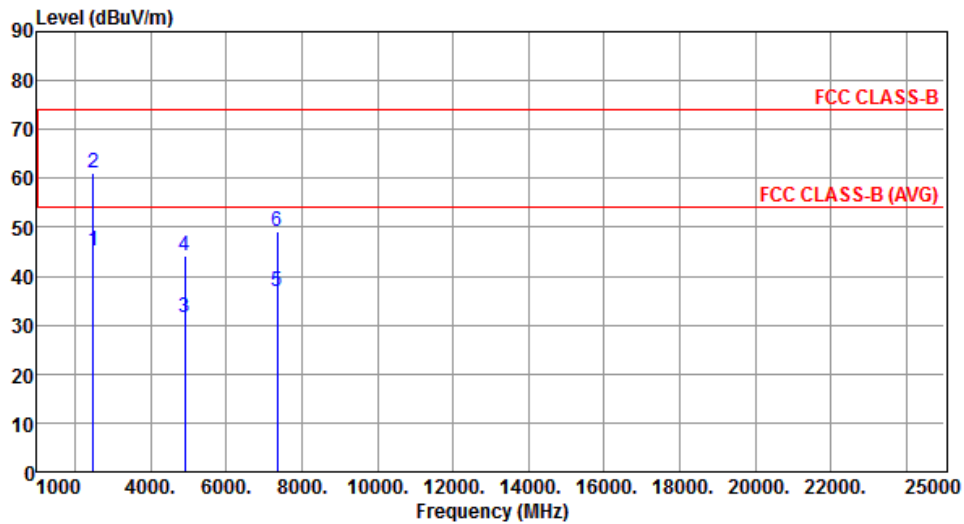


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	45.19	54.00	-8.81	48.12	-2.93	Average	109	287
2	2483.50	61.21	74.00	-12.79	64.14	-2.93	Peak	109	287
3	4904.00	31.50	54.00	-22.50	27.64	3.86	Average	100	122
4	4904.00	44.26	74.00	-29.74	40.40	3.86	Peak	100	122
5	7356.00	36.77	54.00	-17.23	28.33	8.44	Average	100	231
6	7356.00	49.32	74.00	-24.68	40.88	8.44	Peak	100	231

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	2452
<b>Polarization</b>	Vertical		

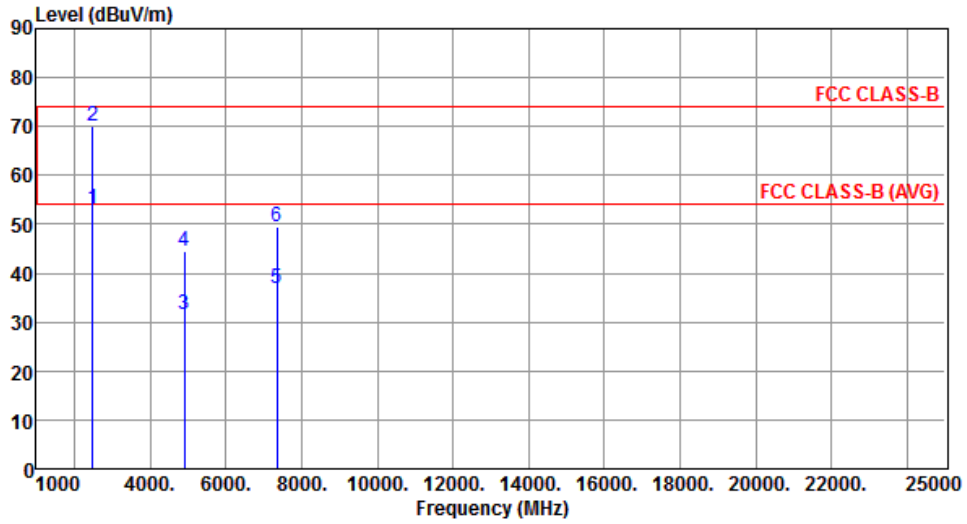

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	52.99	54.00	-1.01	55.92	-2.93	Average	155	92
2	2483.50	70.00	74.00	-4.00	72.93	-2.93	Peak	155	92
3	4904.00	31.67	54.00	-22.33	27.81	3.86	Average	100	182
4	4904.00	44.59	74.00	-29.41	40.73	3.86	Peak	100	182
5	7356.00	36.99	54.00	-17.01	28.55	8.44	Average	100	249
6	7356.00	49.63	74.00	-24.37	41.19	8.44	Peak	100	249

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



## 3.6 Emissions in Non-Restricted Frequency Bands

### 3.6.1 Emissions in Non-Restricted Frequency Bands Limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz

### 3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.6.3 Test Procedures


#### Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

#### Emission level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level

### 3.6.4 Test Setup

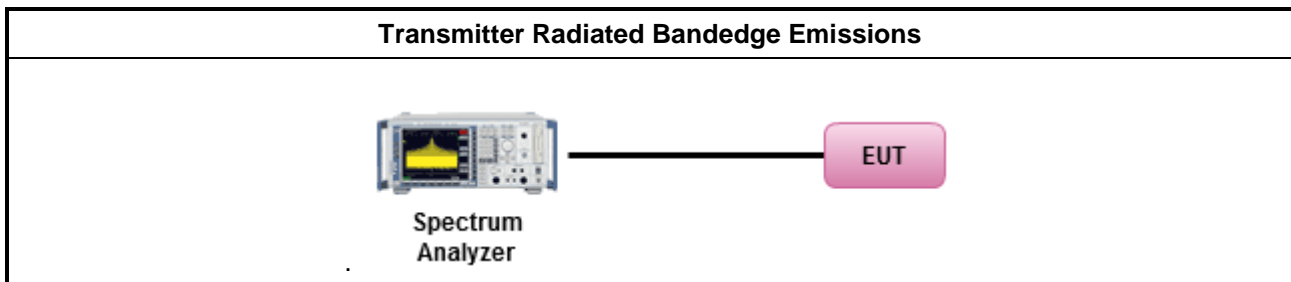



### 3.6.5 Test Result of Emissions in non-restricted frequency bands


This test item is performed on each TX output individually without summing or adding  $10 \log(N_{ANT})$  since measurements are made relative to the in-band emissions on the individual outputs. Only worst test result of each operating mode is presented.

### 3.6.6 Unwanted Emissions into Non-Restricted Frequency Bands


802.11b

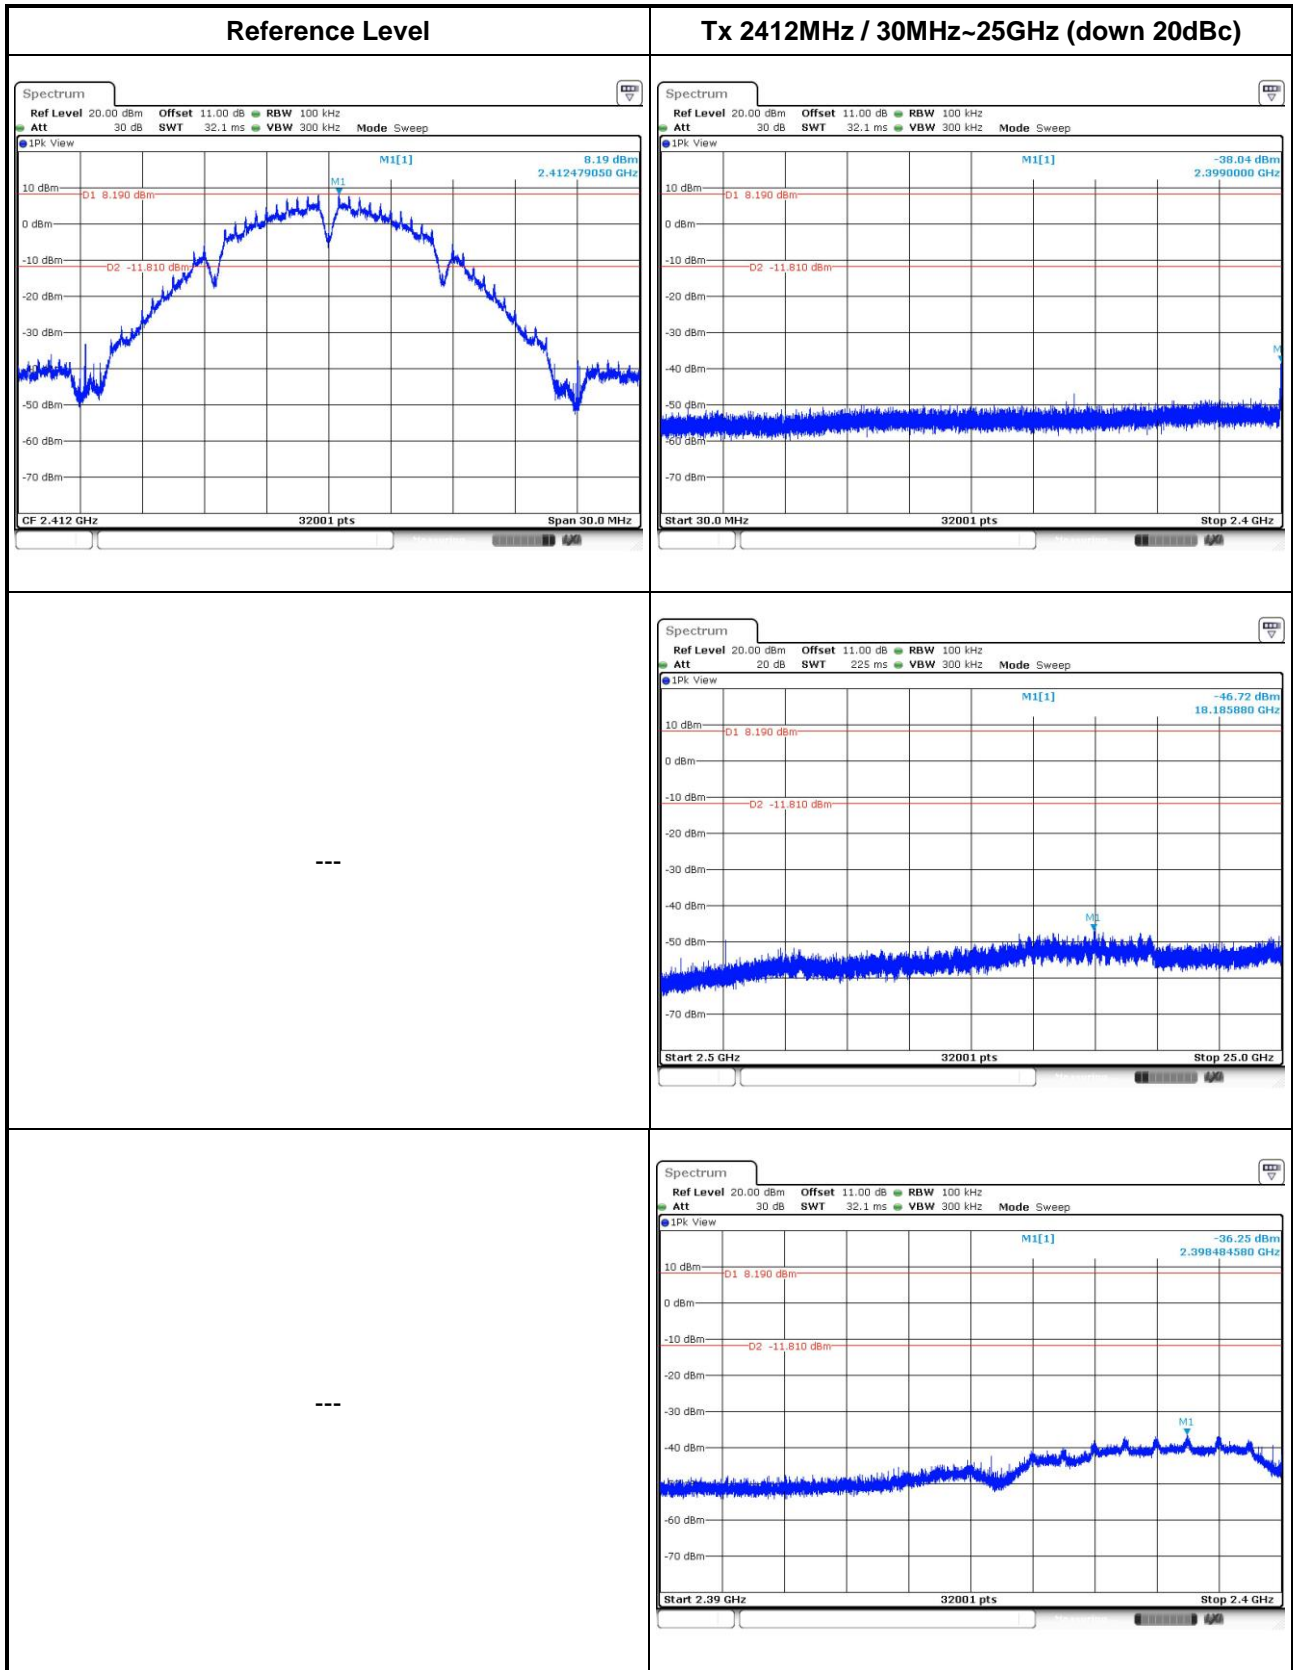


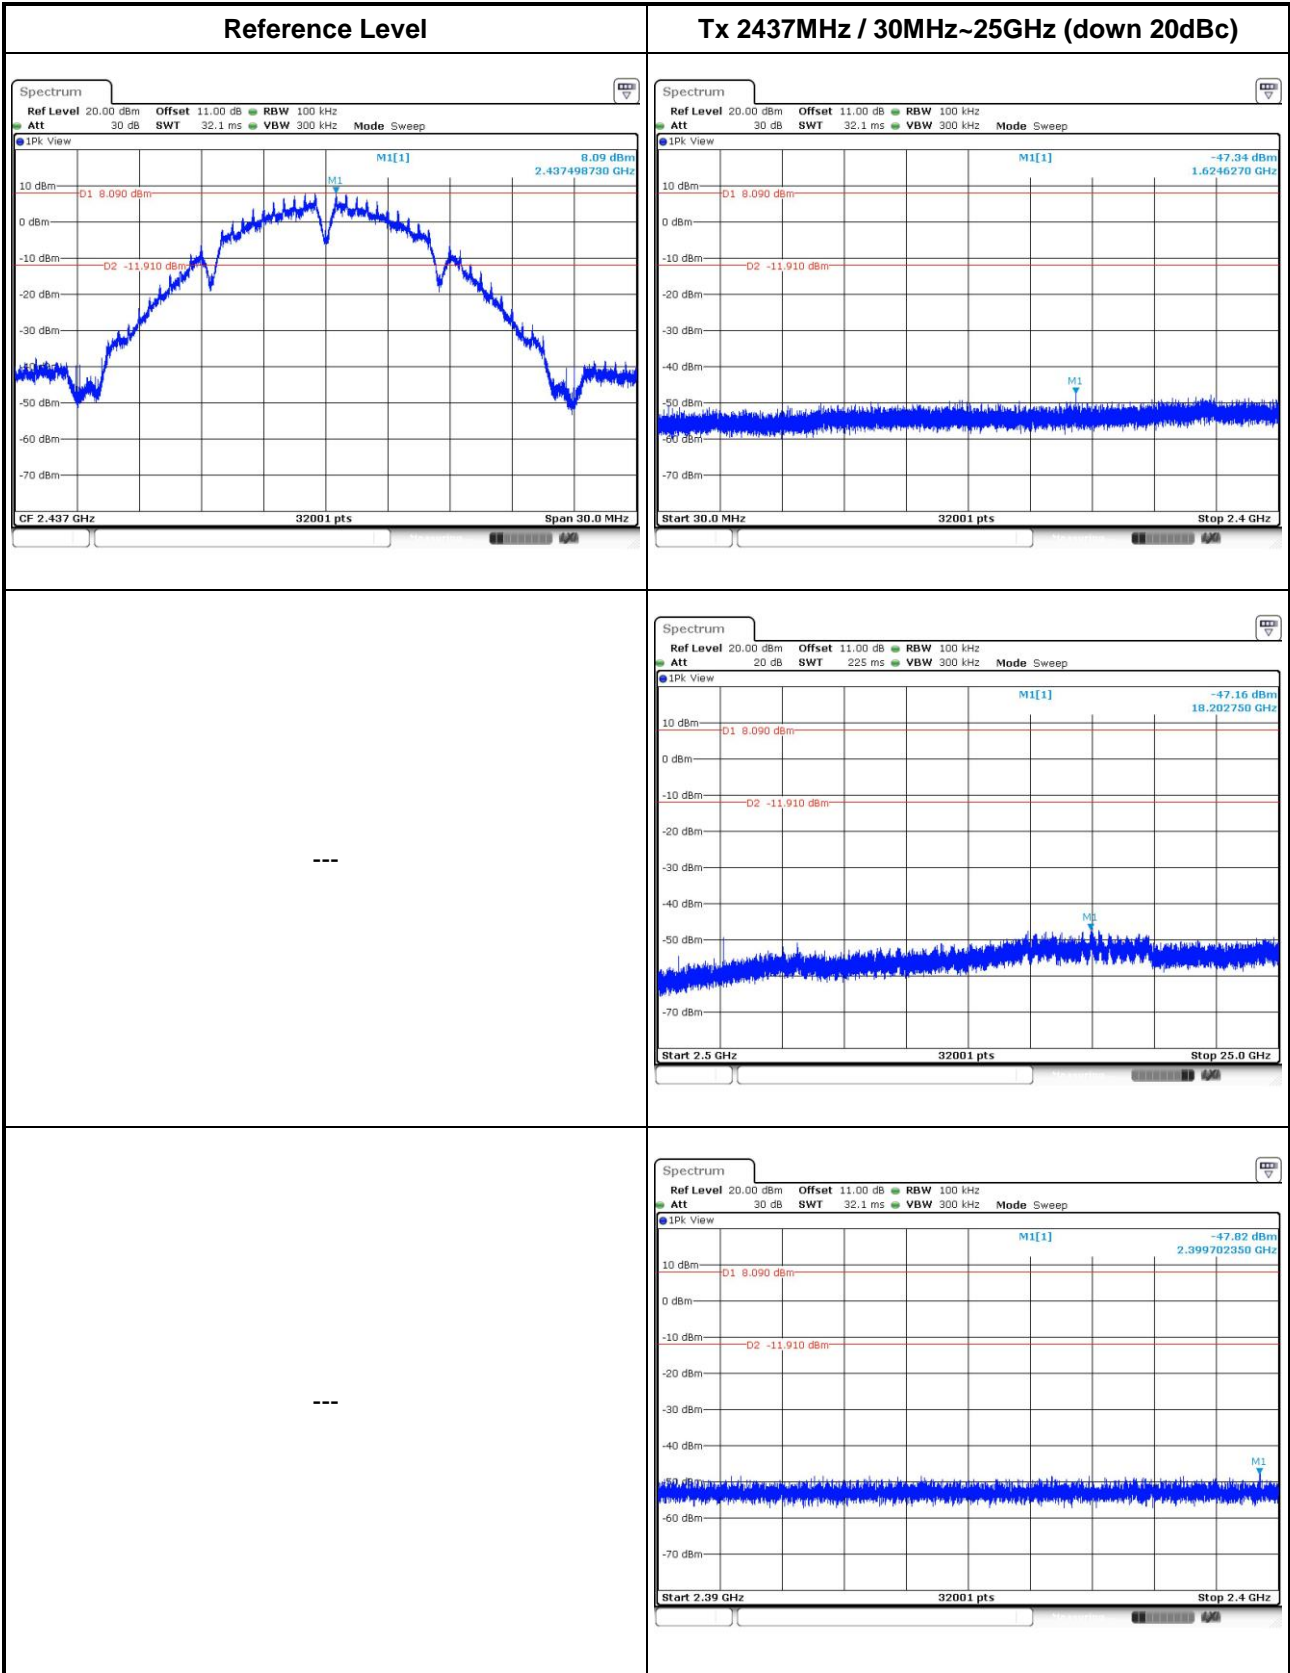


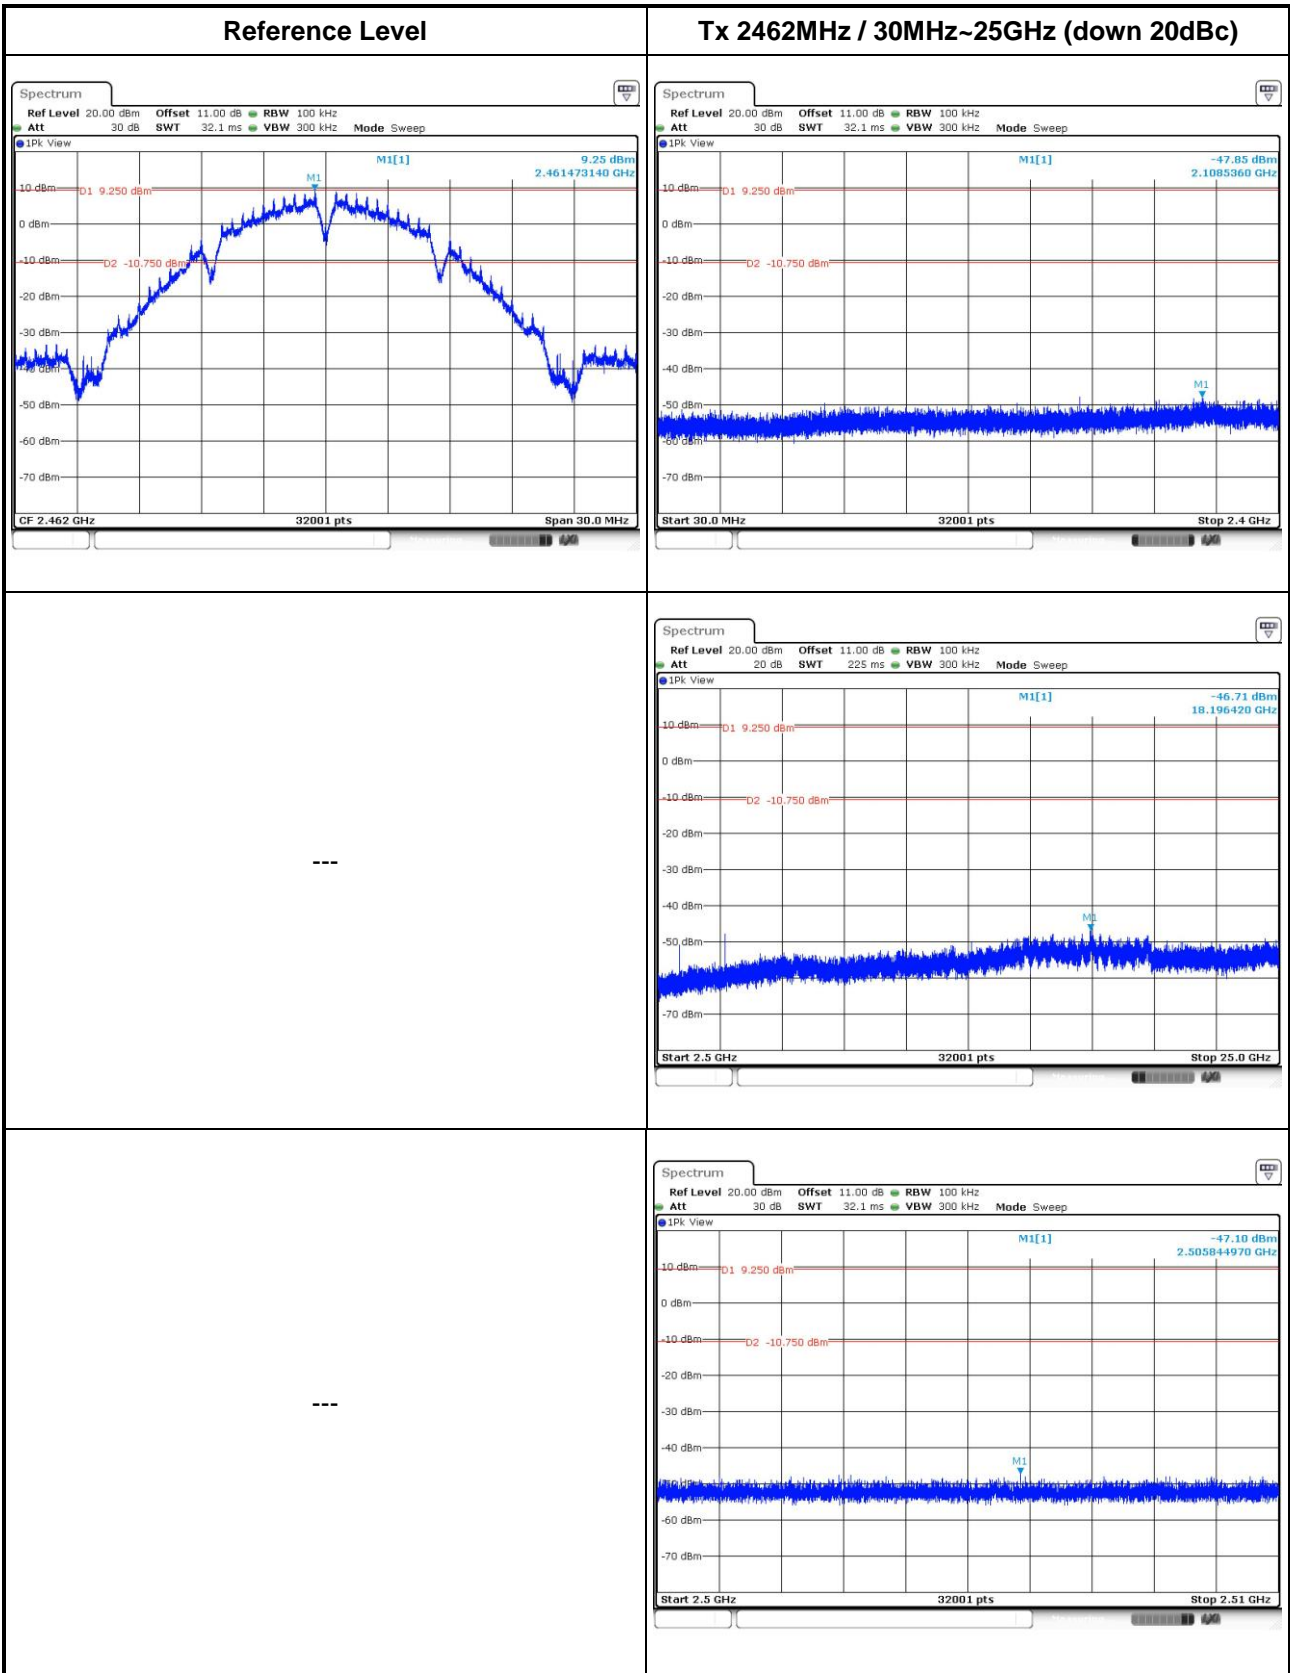


802.11g

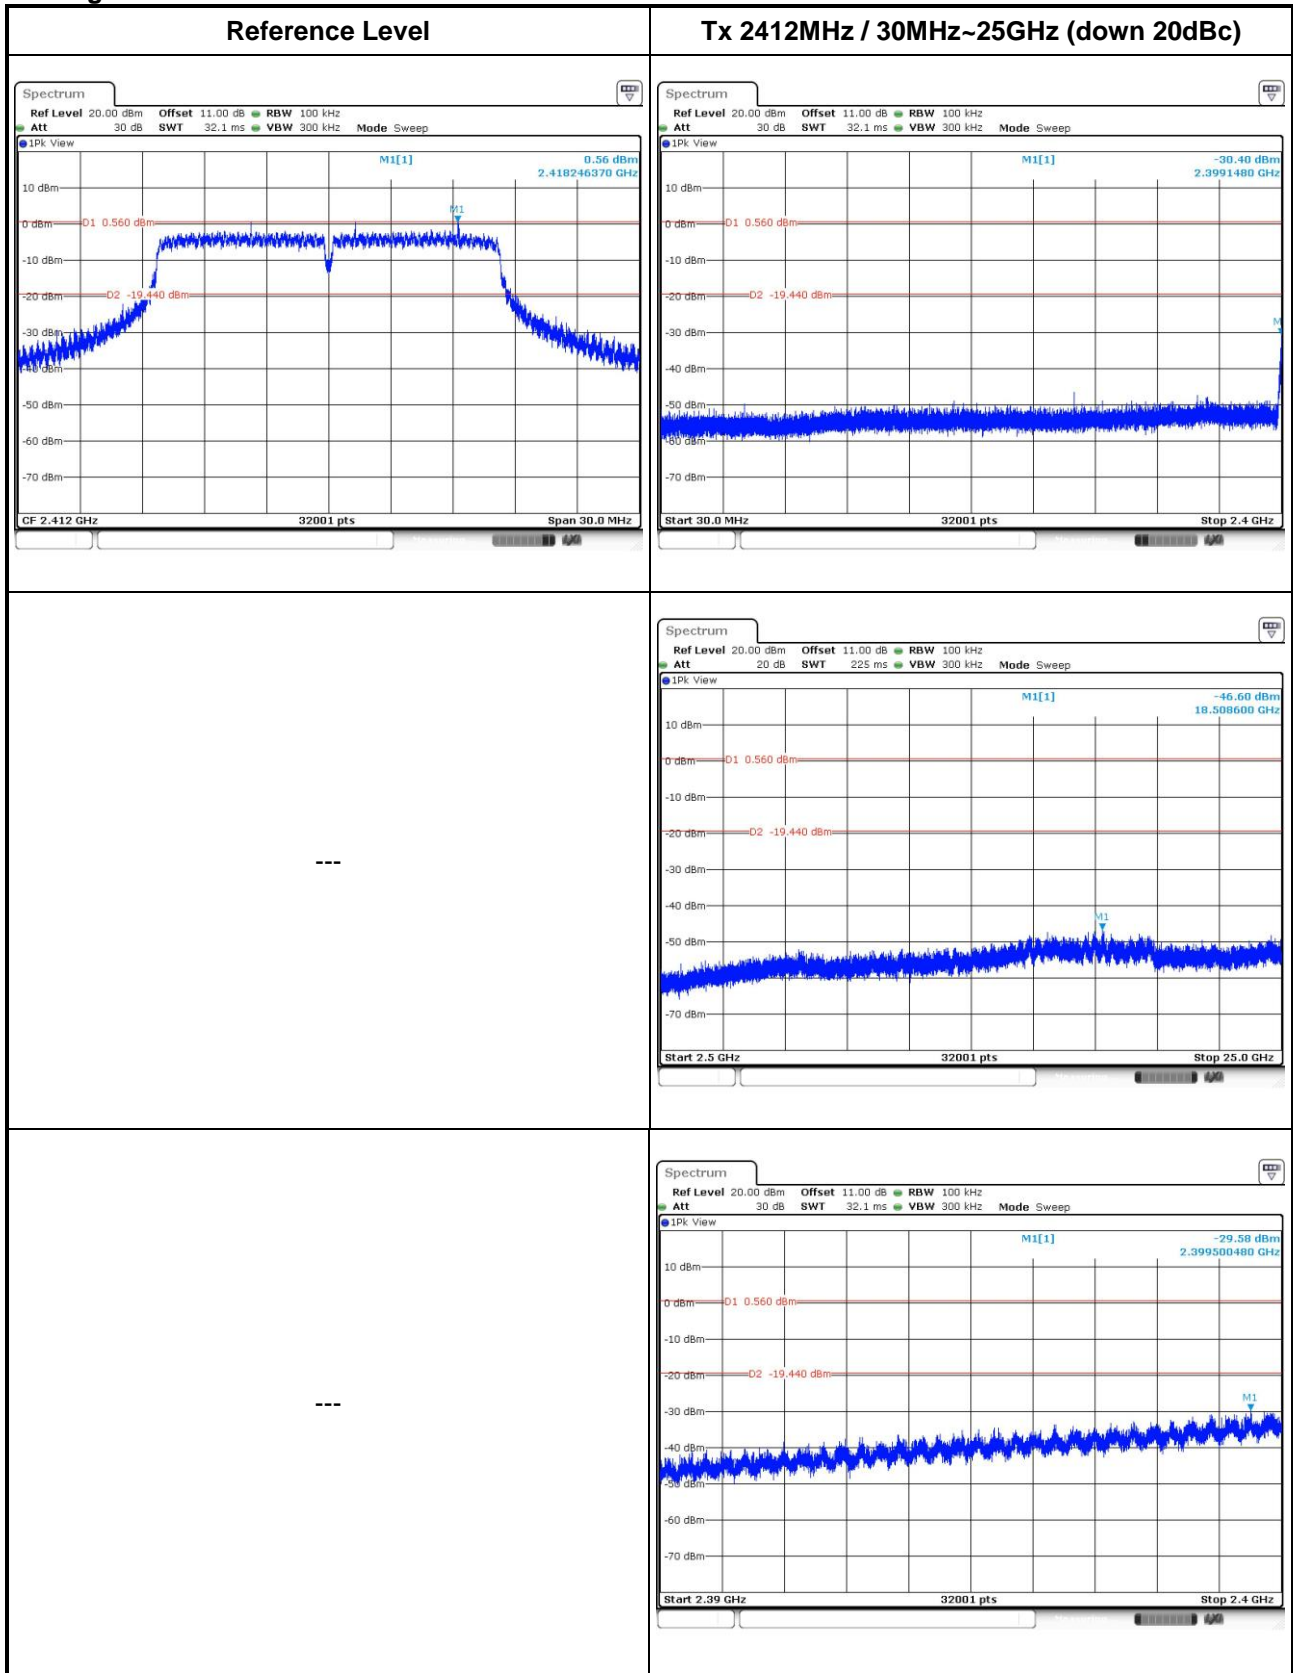

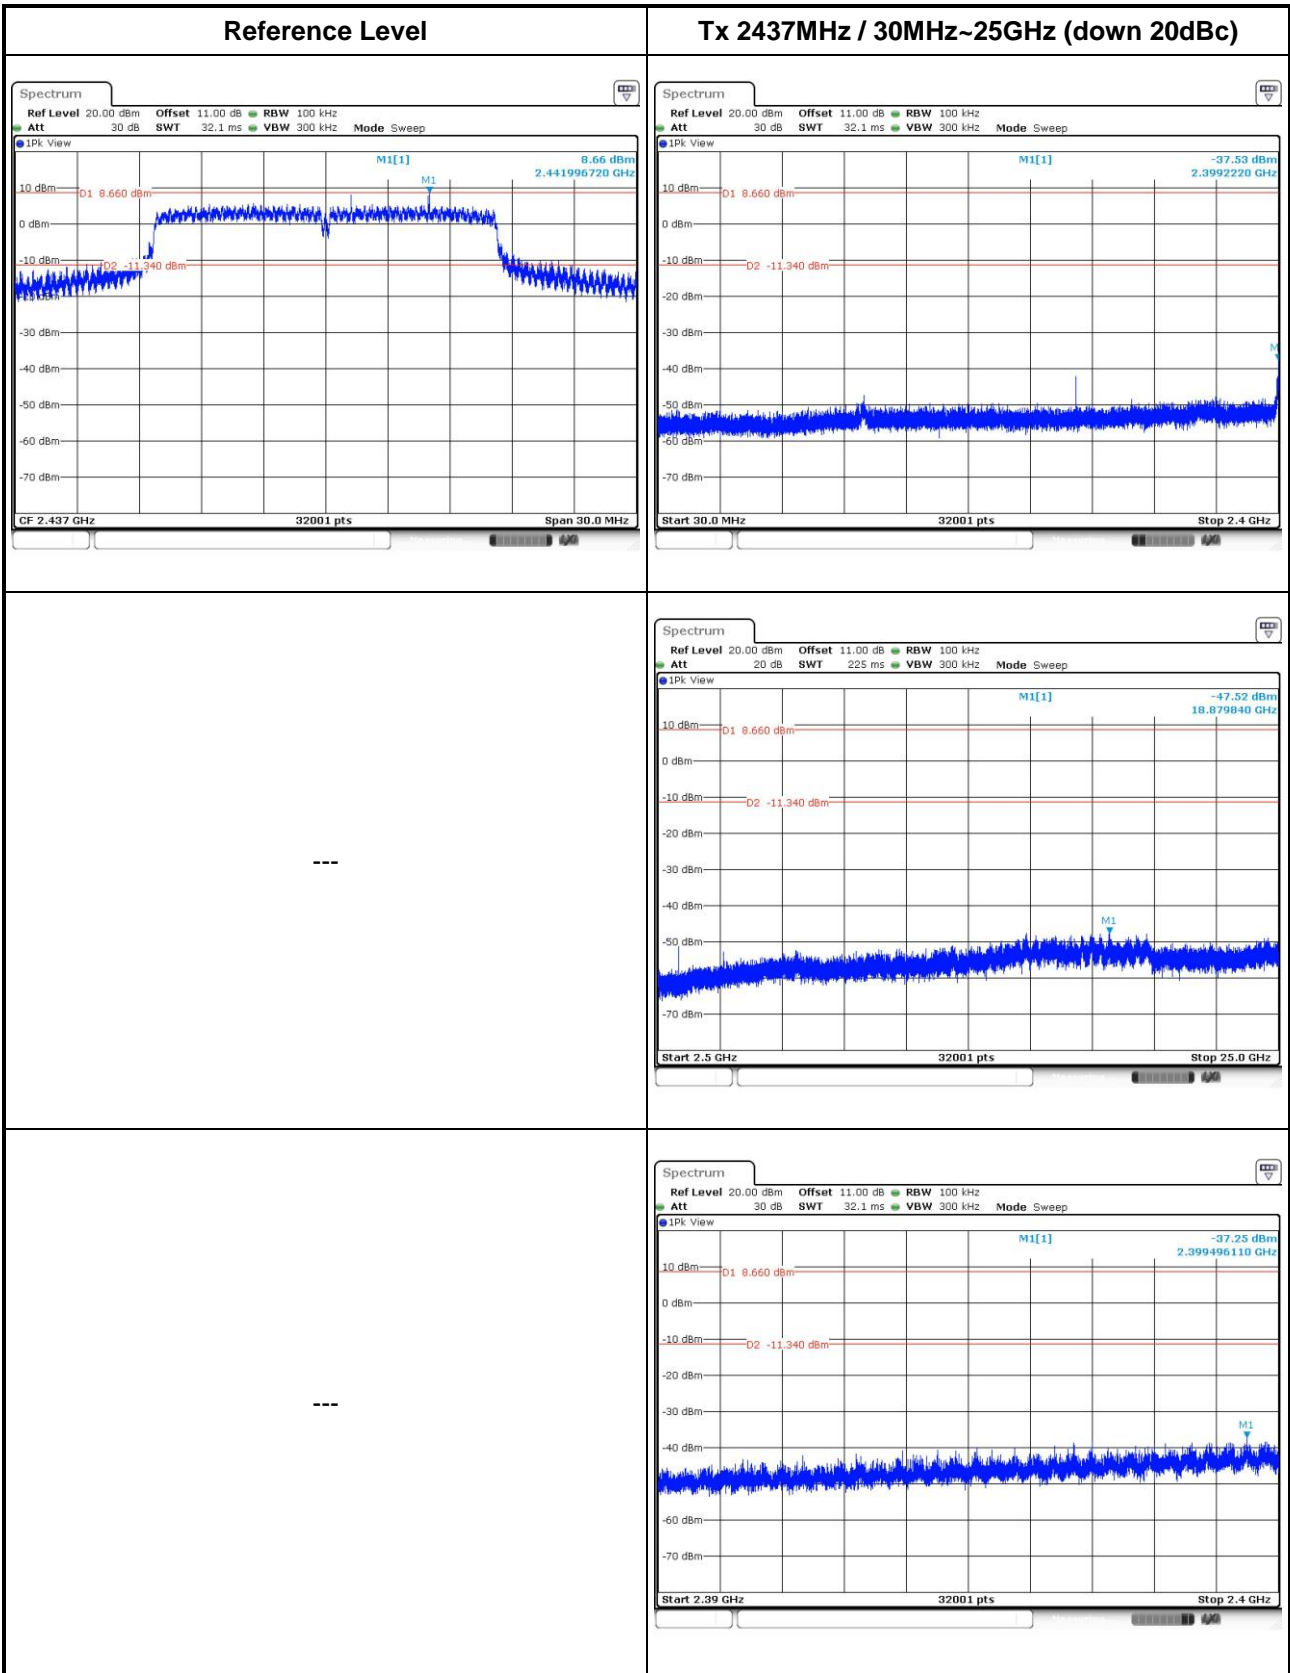


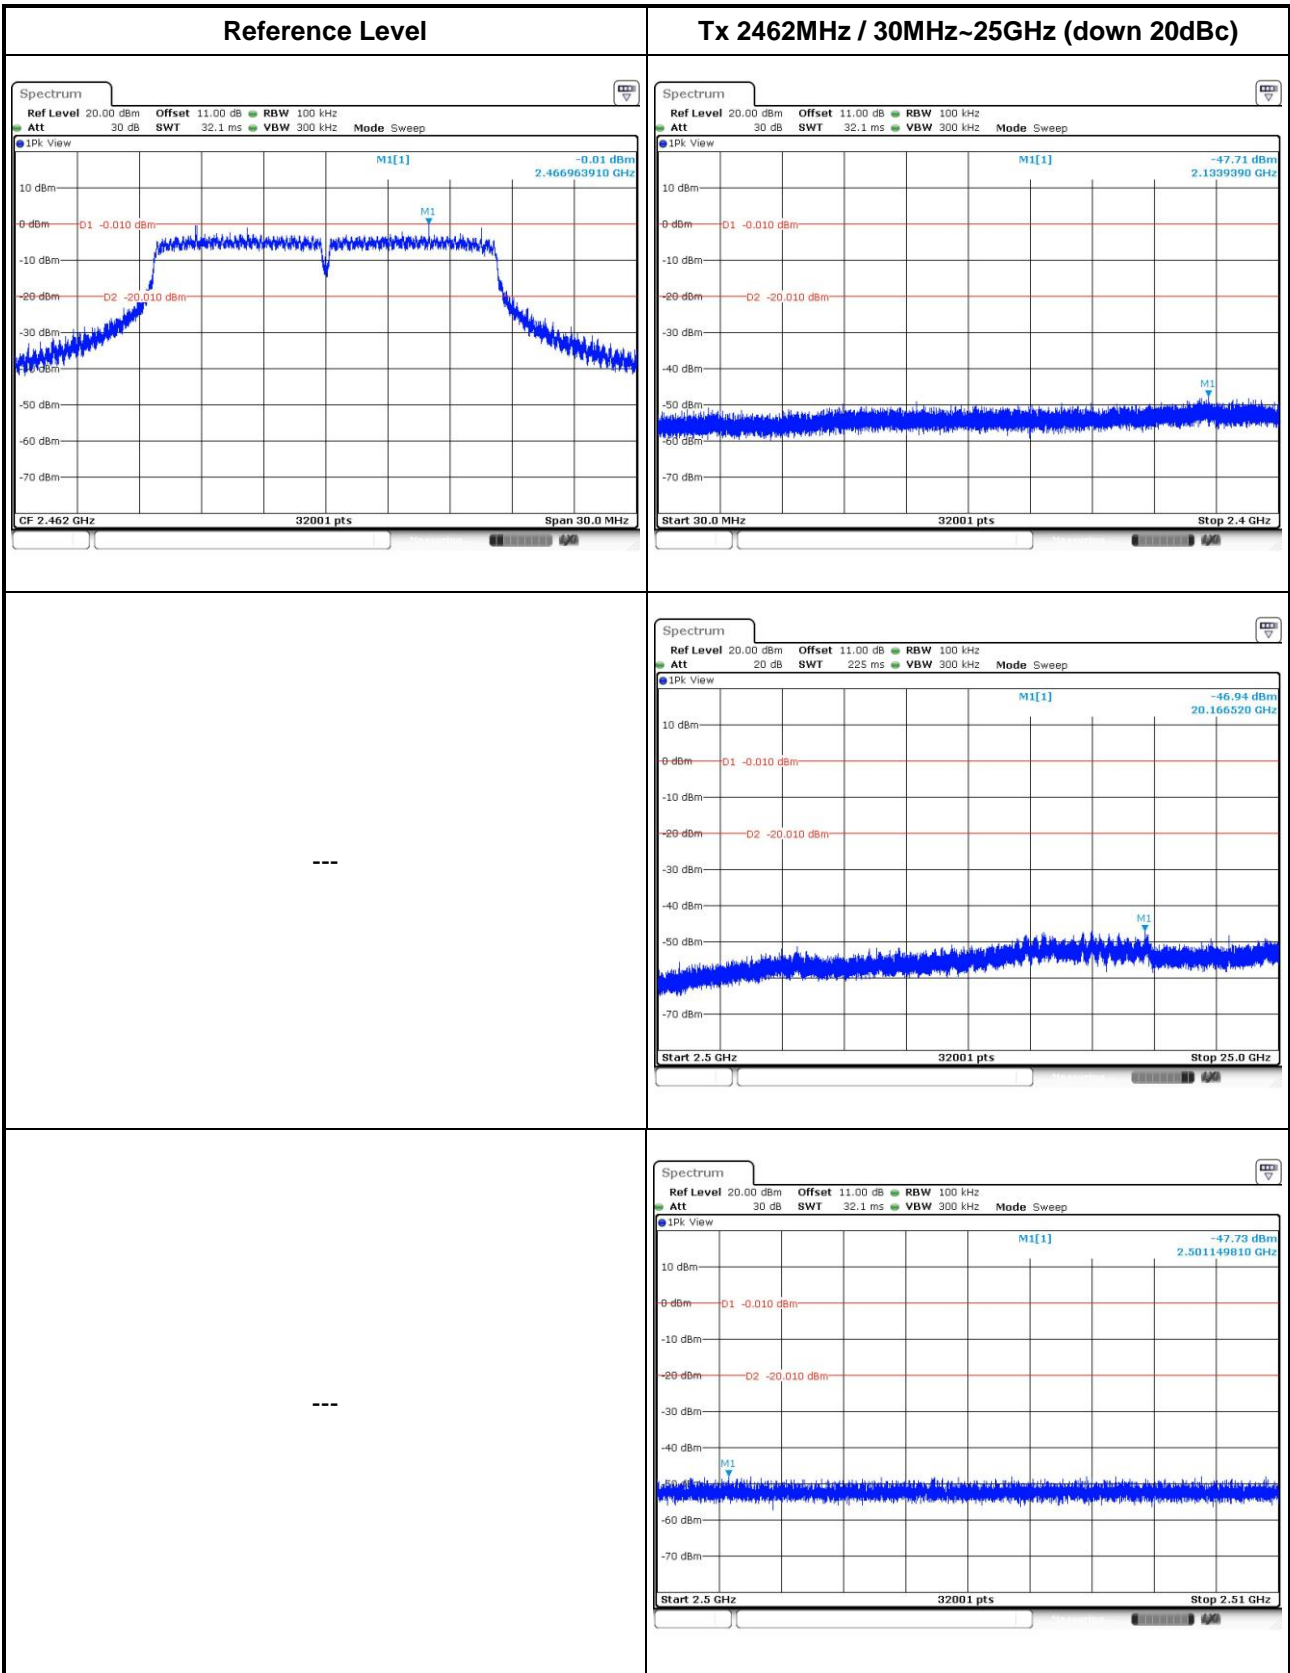


802.11n HT20

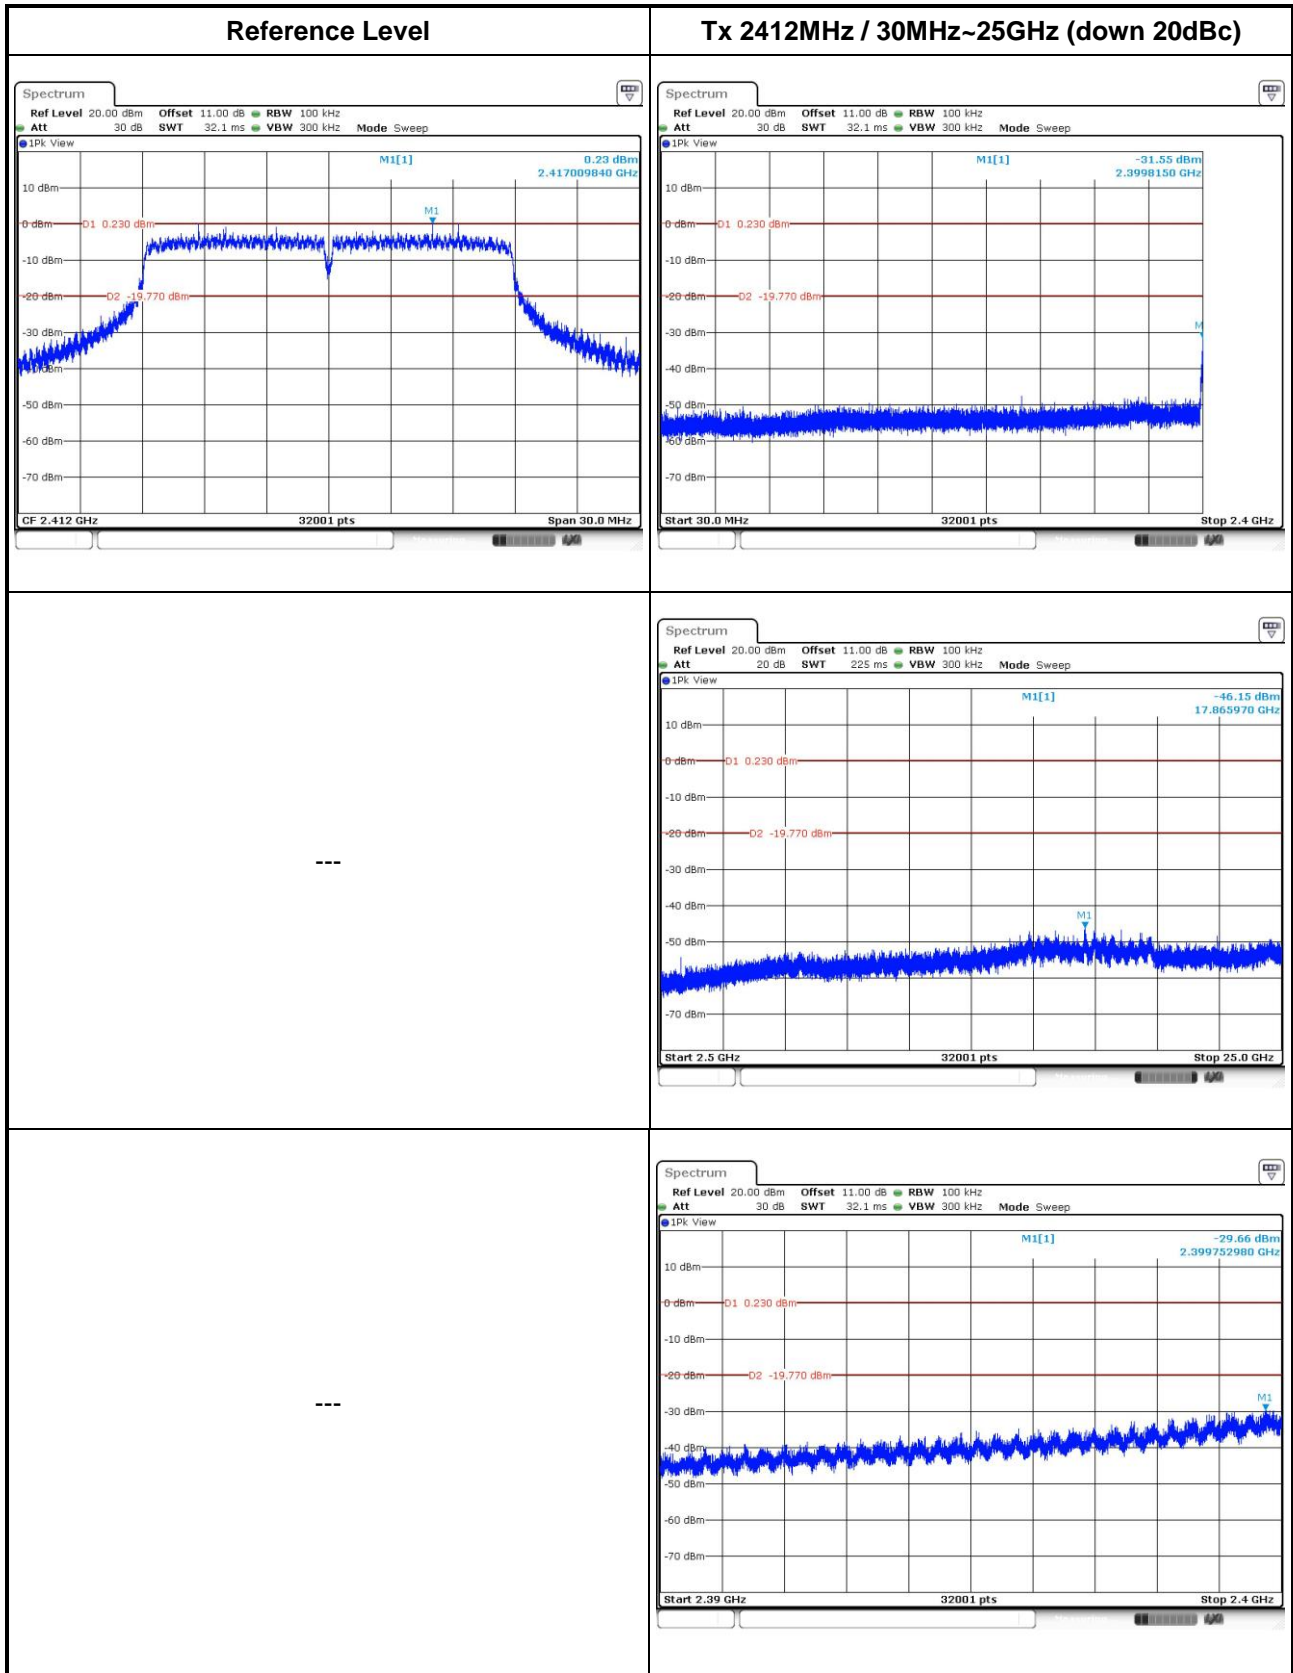





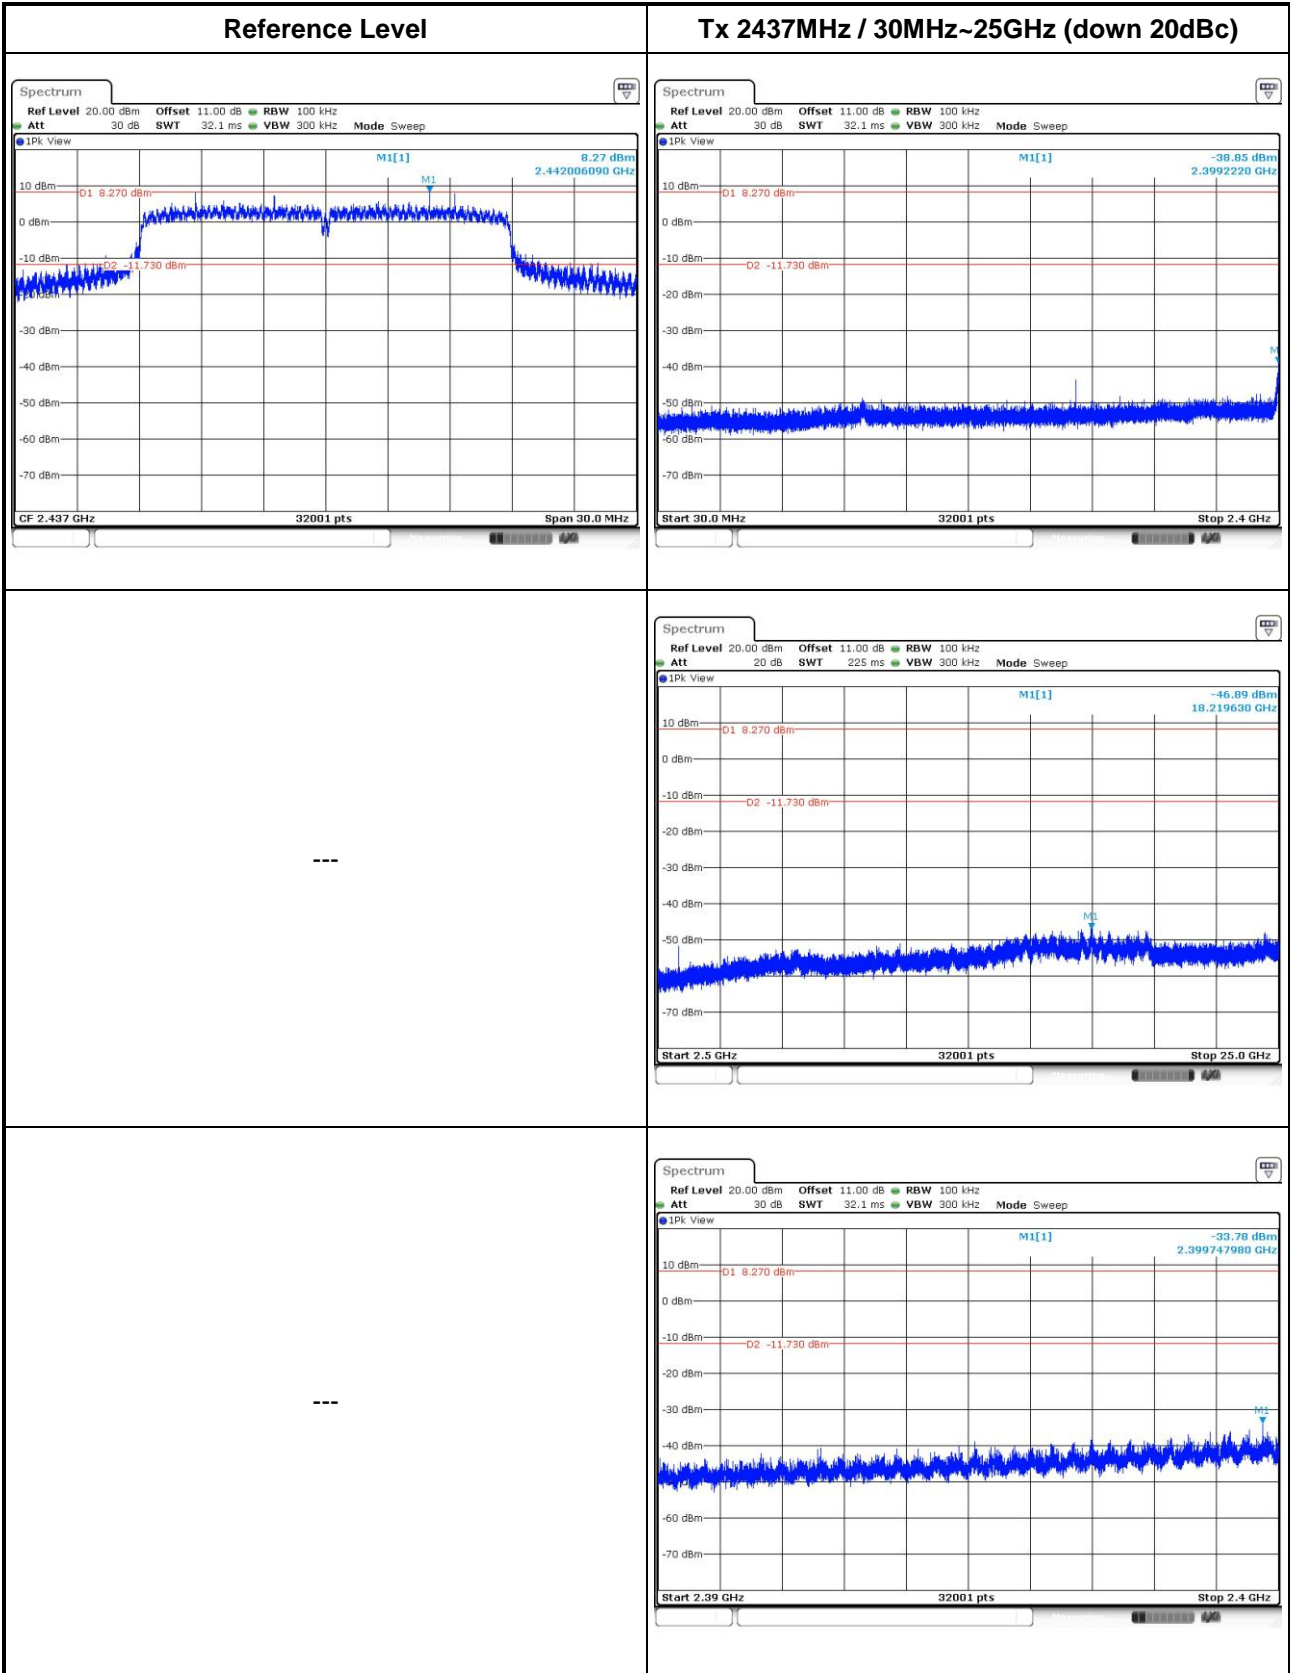


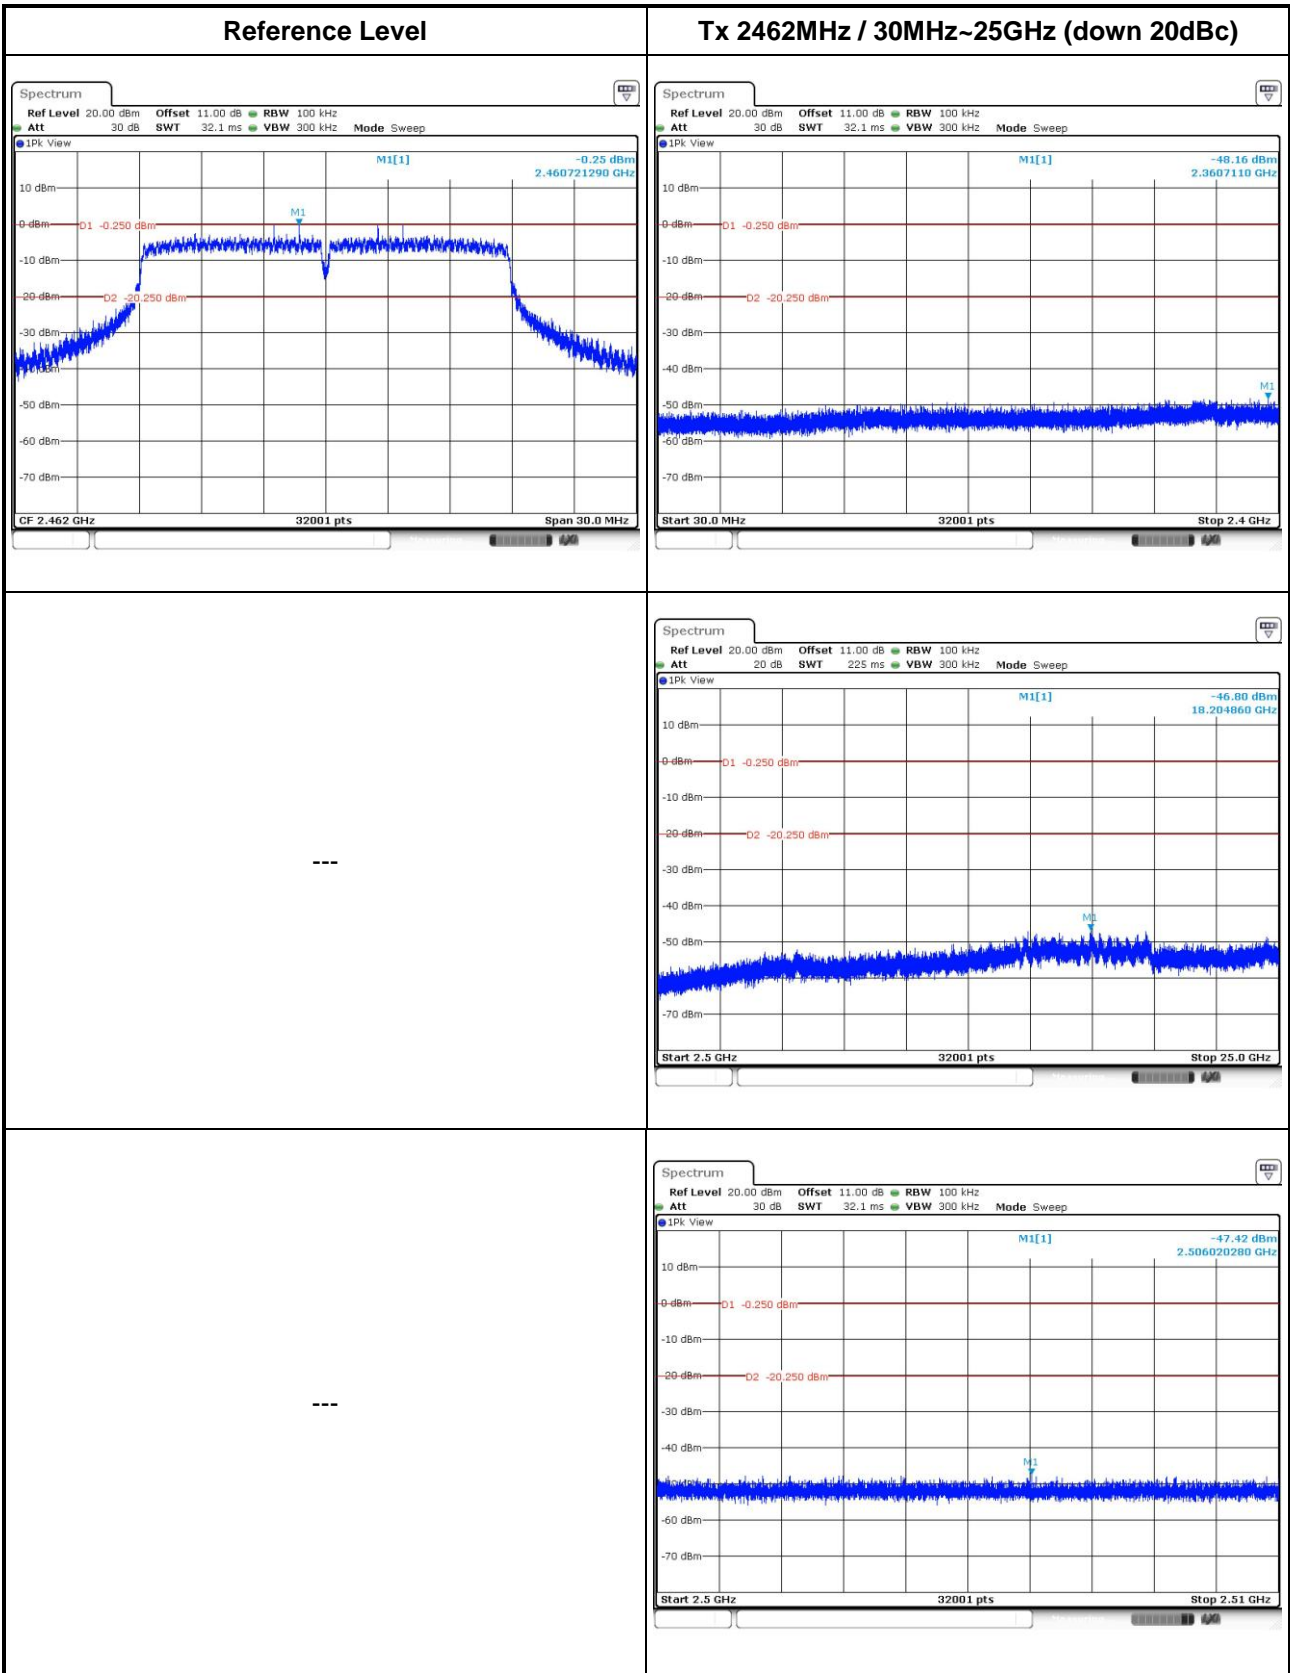

802.11n HT40

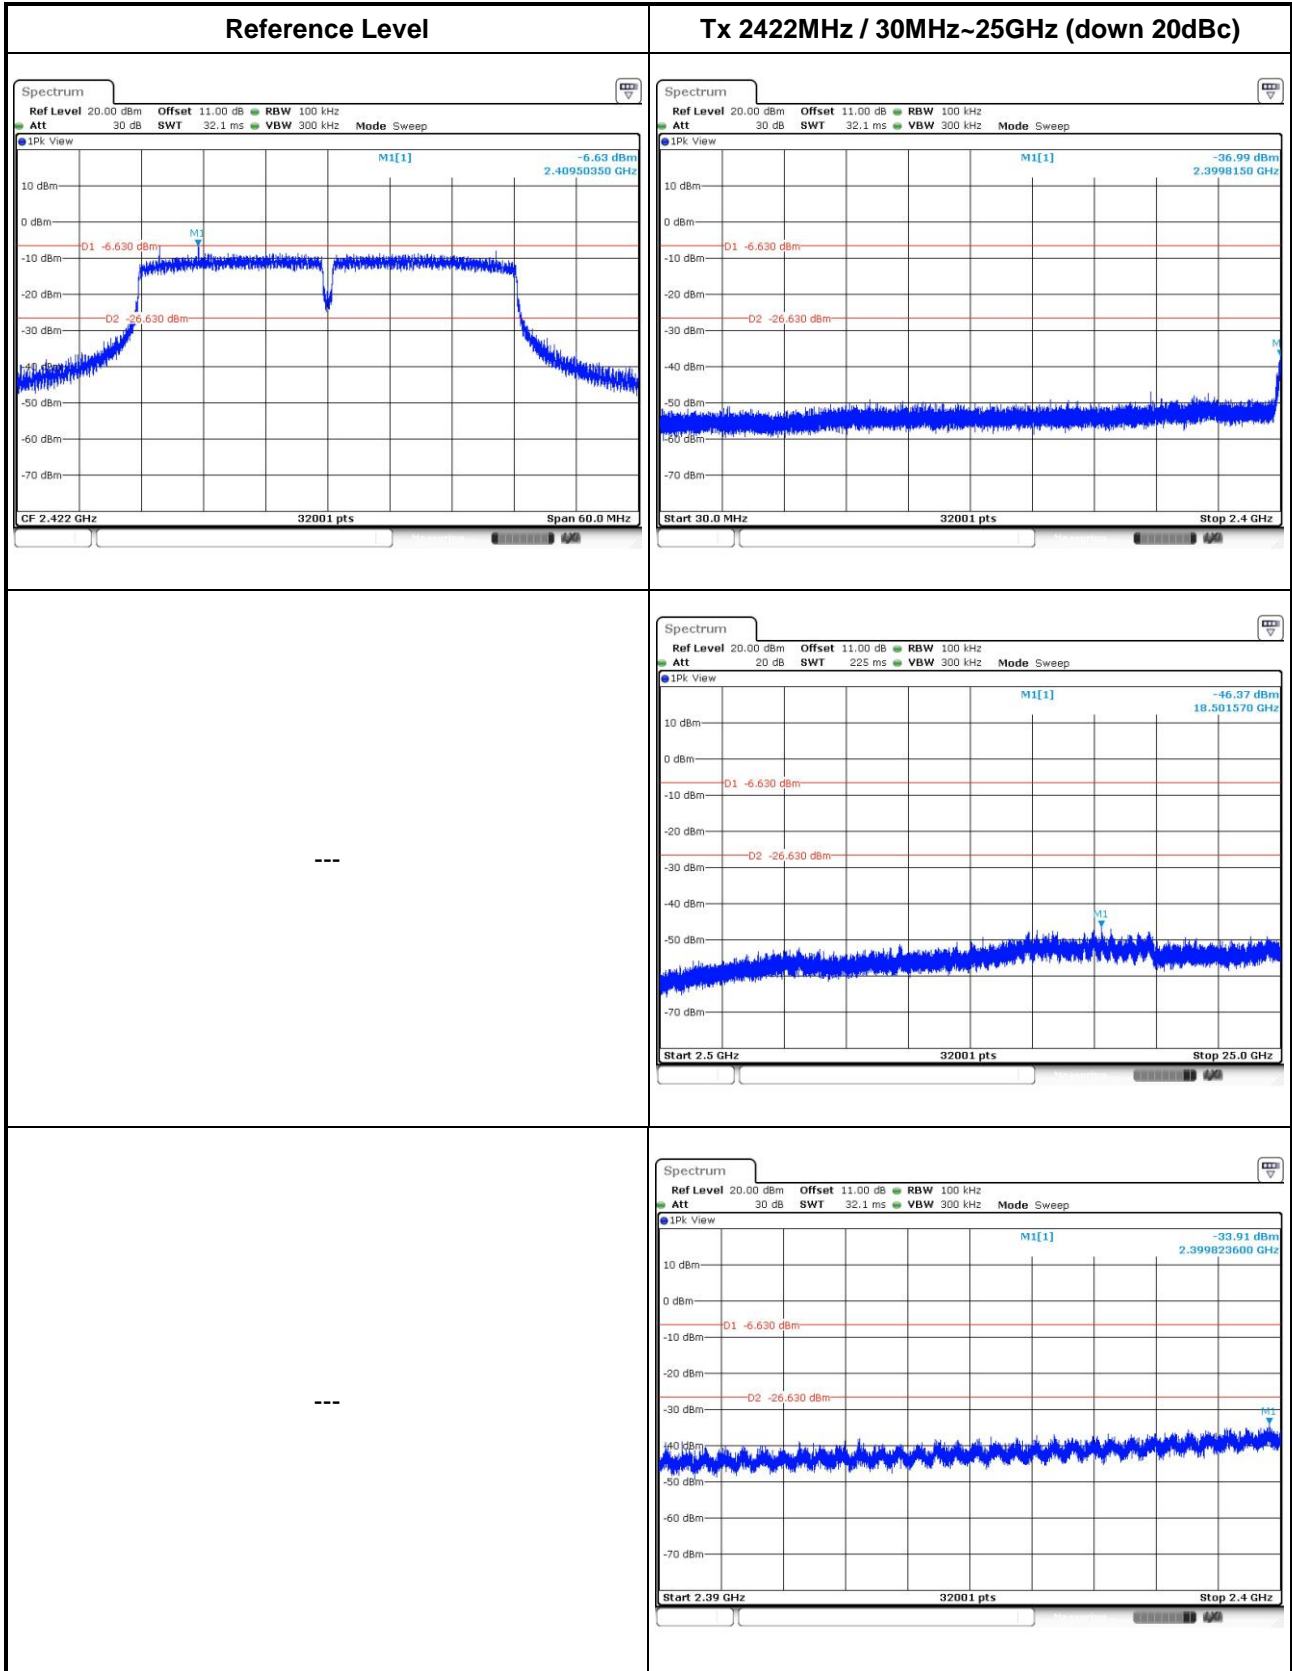

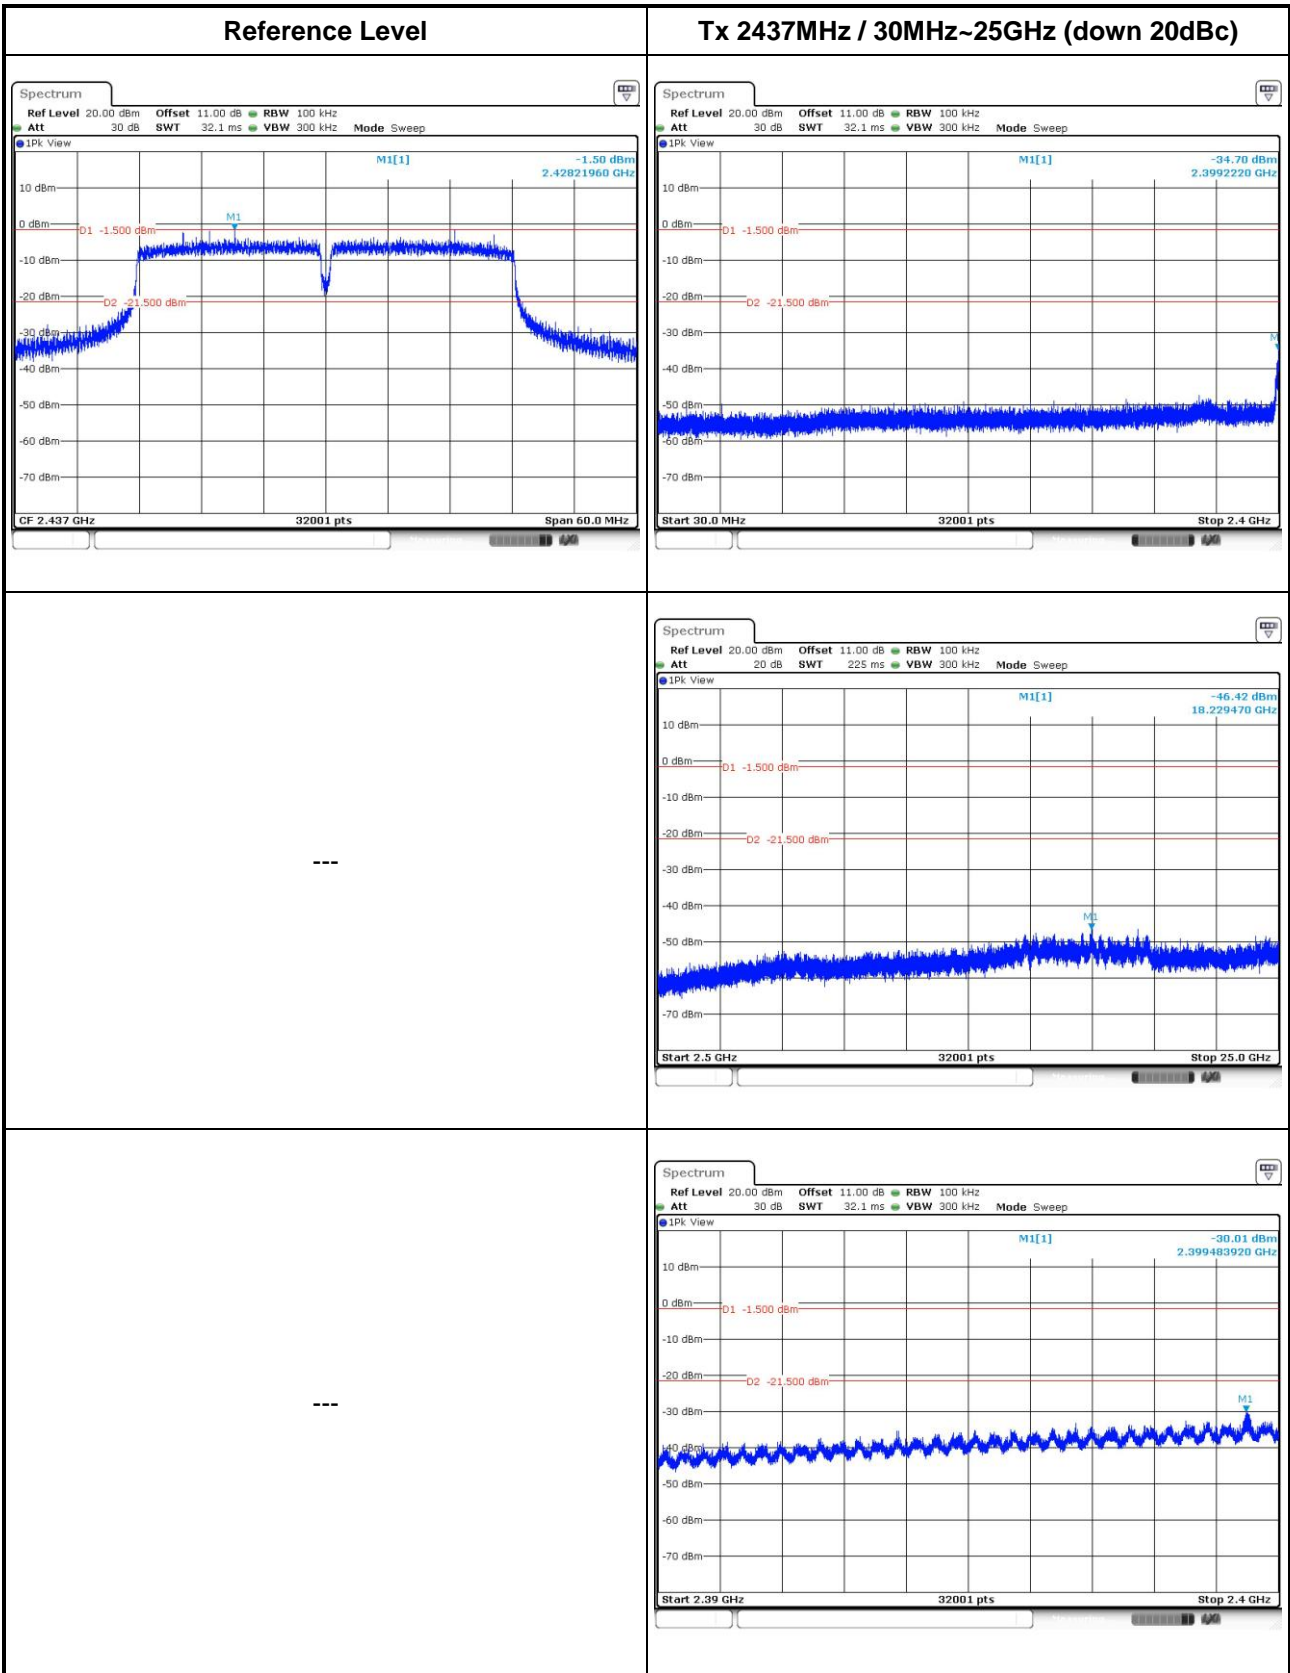

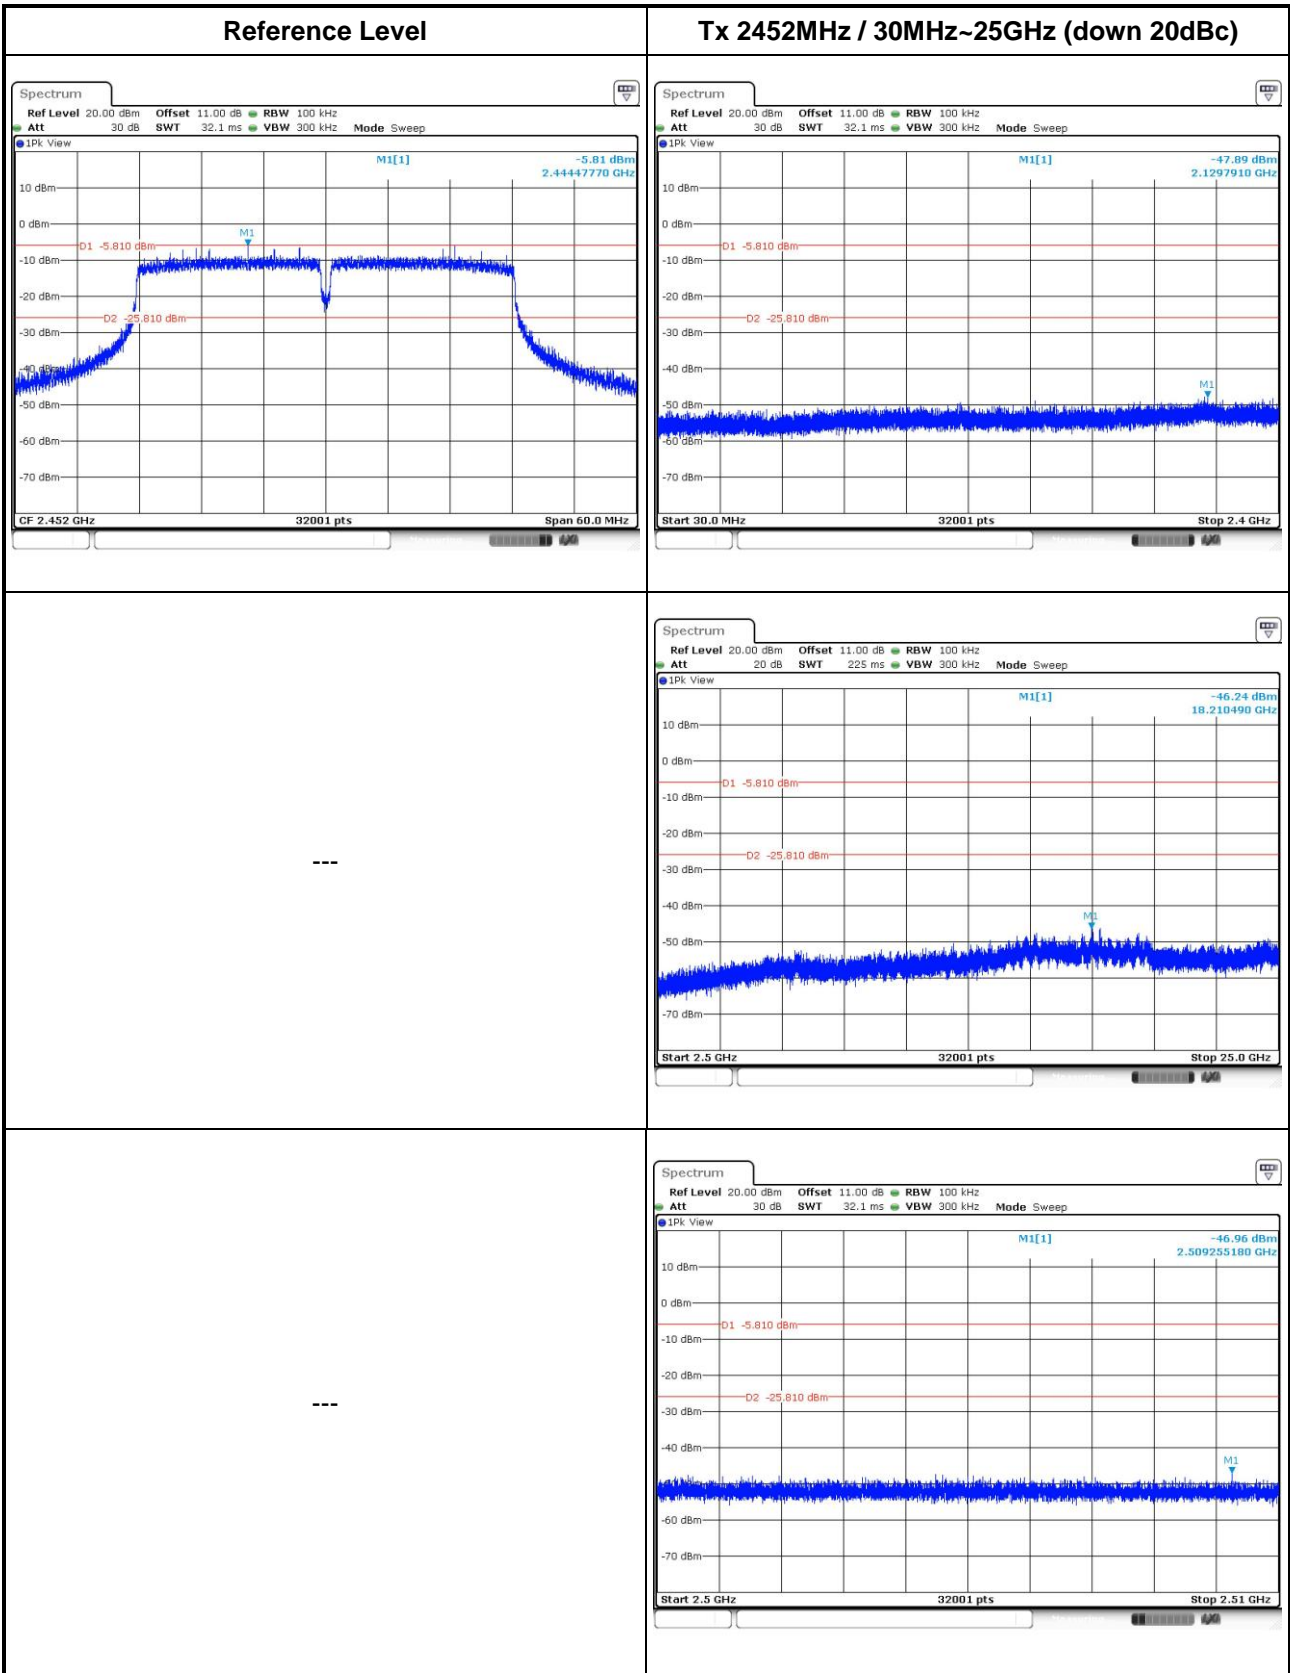

## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <http://www.icertifi.com.tw>.

### **Linkou**

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin  
Kou District, New Taipei City,  
Taiwan, R.O.C.

### **Kwei Shan**

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,  
Kwei Shan District, Tao Yuan City  
333, Taiwan, R.O.C.

### **Kwei Shan Site II**

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd  
St., Kwei Shan District, Tao Yuan  
City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC\_Service@icertifi.com.tw

==END==