



Test report No. : 4790038917B-US-R1-V0
Page : 1 of 123
Issued date : 2022/1/13
FCC ID : RYK-WUBT239ACND

RADIO TEST REPORT

Product : 802.11ac/a/b/g/n 2T2R Wi-Fi + Bluetooth 5.0 USB Dongle
Model Name : WUBT-239ACN(BT) Dongle
FCC ID : RYK-WUBT239ACND
Test Regulation : FCC 47 CFR Part 15 Subpart E (Section 15.407)
Received Date : 2021/8/5
Test Date : 2021/8/9 ~ 2021/10/25
Issued Date : 2022/1/13

Applicant : SparkLAN Communications, Inc.
8F., No.257, Sec. 2, Tiding Blvd., Neihu District, Taipei City
11493, Taiwan (R.O.C.)

Issued By : Underwriters Laboratories Taiwan Co., Ltd.
Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd.,
Zhudong Township, Hsinchu County, Taiwan



The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report are responsible of the test sample(s) provided by the client only and are not to be used to indicate applicability to other similar products.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Telephone :+886-2-7737-3000
Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0



Table of Contents

| | |
|---|-----------|
| 1. Attestation of Test Results | 4 |
| 2. Summary of Test Results | 5 |
| 3. Test Methodology and Reference Procedures..... | 6 |
| 4. Facilities and Accreditation..... | 6 |
| 5. Measurement Uncertainty | 7 |
| 6. Equipment under Test | 8 |
| 6.1. Description of EUT..... | 8 |
| 6.2. Channel List..... | 10 |
| 6.3. Test Condition..... | 12 |
| 6.4. Description of Available Antennas..... | 12 |
| 6.5. Test Mode Applicability and Tested Channel Detail..... | 13 |
| 6.6. Duty cycle | 15 |
| 7. Test Equipment..... | 16 |
| 8. Description of Test Setup..... | 18 |
| 9. Test Results..... | 21 |
| 9.1. Conducted output power | 21 |
| 9.2. Radiated Spurious Emission | 28 |
| 9.3. AC Power Line Conducted Emission | 120 |

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0



Test report No. : 4790038917B-US-R1-V0
Page : 4 of 123
Issued date : 2022/1/13
FCC ID : RYK-WUBT239ACND

1. Attestation of Test Results

APPLICANT: SparkLAN Communications, Inc.
8F., No.257, Sec. 2, Tiding Blvd., Neihu District, Taipei City 11493,
Taiwan (R.O.C.)

MANUFACTURER: SparkLAN Communications, Inc.
8F., No.257, Sec. 2, Tiding Blvd., Neihu District, Taipei City 11493,
Taiwan (R.O.C.)

EUT DESCRIPTION: 802.11ac/a/b/g/n 2T2R Wi-Fi + Bluetooth 5.0 USB Dongle

BRAND: SparkLAN

MODEL: WUBT-239ACN(BT) Dongle

SAMPLE STAGE: Engineering Verification Test sample

DATE of TESTED: 2021/8/9 ~ 2021/10/25

| APPLICABLE STANDARDS | |
|---|--------------|
| STANDARD | Test Results |
| FCC 47 CFR PART 15 Subpart E (Section 15.407) | PASS |

Underwriters Laboratories Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Underwriters Laboratories Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Underwriters Laboratories Taiwan Co., Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Underwriters Laboratories Taiwan Co., Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Prepared By:

Sally Lu
Project Handler

Date : 2022/1/13

Approved and Authorized By:

Waternil Guan
Engineer

Date : 2022/1/13

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Telephone : +886-2-7737-3000
Facsimile (FAX) : +886-3-583-7948

Doc No: 17-EM-F0878 / 6.0



2. Summary of Test Results

| Summary of Test Results | | |
|--------------------------------|---|--------|
| FCC Clause | Test Items | Result |
| 15.407(e) | 6dB Bandwidth | Note 1 |
| 15.403(i) | 26dB Bandwidth | Note 1 |
| 2.1049 | Occupied Bandwidth | Note 1 |
| 15.407(a)(1/2/3) | Conducted Output Power | PASS |
| 15.407(a)(1/2/3) | Power Spectral Density | Note 1 |
| 15.407(g) | Frequency Stability | Note 1 |
| 15.407(b) (1/2/3/4(i/ii)/9) | Radiated Emissions and Band Edge Measurement | PASS |
| 15.407(b)(9) | AC Power Conducted Emission | PASS |
| 15.203 | Antenna Requirement | PASS |
| 15.407(h) | Dynamic Frequency Selection | Note 2 |

Note:

1. This prepared for FCC Spot Check Verification Report, the test items and spot-check test data are decided by applicant's engineering judgment, for more details please refer to the note 1 and 2 of section 6.1.
2. The "Dynamic Frequency Selection measurement" was recorded in Report No.: 4790038917B-US-R2-V0.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0



3. Test Methodology and Reference Procedures

The tests documented in this report were performed in accordance with 47 CFR FCC Part 2, KDB 789033 D02 General UNII Test Procedure New Rules v02r01, KDB414788 D01 Radiated Test Site v01r01, ANSI C63.10-2013 and KDB 662911 D01 Multiple Transmitter Output v02r01.

4. Facilities and Accreditation

| | |
|----------------------------------|---|
| Test Location | Underwriters Laboratories Taiwan Co., Ltd. |
| Address | Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan |
| Accreditation Certificate | Underwriters Laboratories Taiwan Co., Ltd. is accredited by TAF, Laboratory Code 3398. |

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0



5. Measurement Uncertainty

For statement of conformity, accuracy method (Section 8.2.4 and 8.2.5 of ISO Guide 98-4) was applied as decision rule for measurement in this test report.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k=2$.

| Measurement | Frequency | Uncertainty |
|--|----------------|--------------|
| Conducted disturbance at mains terminals ports | 150kHz ~ 30MHz | ± 3.1 dB |
| RF Conducted | 9 kHz - 40GHz | ± 1.9 dB |
| Radiated disturbance below 30MHz | 9 kHz - 30 MHz | ± 1.9 dB |
| Radiated disturbance below 1 GHz | 30MHz ~ 1GHz | ± 5.4 dB |
| Radiated disturbance above 1 GHz | 1GHz ~ 40GHz | ± 4.7 dB |

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0



6. Equipment under Test

6.1. Description of EUT

| | | |
|-----------------------------|--|--|
| Product | 802.11ac/a/b/g/n 2T2R Wi-Fi + Bluetooth 5.0 USB Dongle | |
| Brand Name | SparkLAN | |
| Model Name | WUBT-239ACN(BT) Dongle | |
| Operating Frequency | 5180 ~ 5240 MHz, 5260 ~ 5320 MHz, 5500 ~ 5720 MHz, 5745 ~ 5825 MHz | |
| Modulation | 256QAM, 64QAM, 16QAM, QPSK, BPSK | |
| Transfer Rate | 802.11a: up to 54 Mbps 802.11n: up to MCS15 802.11ac: up to MCS9 | |
| Number of Channel | 5180 ~ 5240 MHz | 4 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) |
| | | 2 for 802.11n (HT40), 802.11ac (VHT40) |
| | | 1 for 802.11ac (VHT80) |
| | 5260 ~ 5320 MHz | 4 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) |
| | | 2 for 802.11n (HT40), 802.11ac (VHT40) |
| | | 1 for 802.11ac (VHT80) |
| | 5500 ~ 5720 MHz | 12 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) |
| | | 6 for 802.11n (HT40), 802.11ac (VHT40) |
| | | 3 for 802.11ac (VHT80) |
| | 5745 ~ 5825 MHz | 5 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) |
| | | 2 for 802.11n (HT40), 802.11ac (VHT40) |
| | | 1 for 802.11ac (VHT80) |
| Maximum Output Power | 5180 ~ 5240 MHz: 16.65 dBm 5260 ~ 5320 MHz: 17.80 dBm 5500 ~ 5720 MHz: 17.35 dBm 5745 ~ 5825 MHz: 16.95 dBm | |
| Normal Voltage | 5Vdc | |
| Sample ID | Conducted Test: 4197850 Radiated Test: 4197853 | |

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Telephone :+886-2-7737-3000
Facsimile (FAX) :+886-3-583-7948



Note:

1. This spot check report was issued based on the re-used report with report number 4790038917A-US-R1-V0 / FCC ID: RYK-WUBT239ACNBT. The technical construction which included circuit diagram, PCB Layout, components and component layout, all electrical construction and mechanical construction are as same as the original device (Model: WUBT-239ACN(BT) [MU]), the differences are add outer case and use PCB antenna only. Therefore, only the output power and worst case of the emission was performed and recorded in this report.
2. The spot check verification data was following the table, and just shows the worst case of the radiated spurious and band edge emission.

| Band | Test Item | Test Limit | Original Model | | | Spot Check Model | | | Deviation |
|----------------------|-----------|-------------|--------------------------|----------|--------------|-------------------------|----------|--------------|-----------|
| | | | WUBT-239ACN(BT) [MU] | | | WUBT-239ACN(BT) Dongle | | | |
| | | | FCC ID: RYK-WUBT239ACNBT | | | FCC ID: RYK-WUBT239ACND | | | |
| | | | Mode | Channel | Test Result | Mode | Channel | Test Result | |
| UNII WLAN 5GHz | Band Edge | 54 dBuV/m | 11a | 5300 MHz | 44.34 dBuV/m | 11a | 5180 MHz | 44.59 dBuV/m | 0.25 dB |
| | RSE | 68.2 dBuV/m | 11a | 5240 MHz | 51.04 dBuV/m | 11a | 5240 MHz | 50.97 dBuV/m | -0.07 dB |
| | Band Edge | 54 dBuV/m | 11ac20 | 5240 MHz | 43.96 dBuV/m | 11ac20 | 5240 MHz | 44.04 dBuV/m | 0.08 dB |
| | RSE | 68.2 dBuV/m | 11ac20 | 5220 MHz | 49.77 dBuV/m | 11ac20 | 5220 MHz | 49.92 dBuV/m | 0.15 dB |
| | Band Edge | 54 dBuV/m | 11ac40 | 5190 MHz | 44.04 dBuV/m | 11ac40 | 5190 MHz | 44.64 dBuV/m | 0.6 dB |
| | RSE | 68.2 dBuV/m | 11ac40 | 5230 MHz | 49.92 dBuV/m | 11ac40 | 5230 MHz | 49.81 dBuV/m | -0.11 dB |
| | Band Edge | 54 dBuV/m | 11ac80 | 5210 MHz | 43.95 dBuV/m | 11ac80 | 5210 MHz | 44.33 dBuV/m | 0.38 dB |
| | RSE | 68.2 dBuV/m | 11ac80 | 5210 MHz | 49.51 dBuV/m | 11ac80 | 5210 MHz | 49.46 dBuV/m | -0.05 dB |

Comparison of two models, all test results are under FCC Technical Limit.

3. The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers.

| Modulation Mode | Tx,Rx Function |
|------------------|----------------|
| 802.11a | 2TX,2RX |
| 802.11n (HT20) | 2TX,2RX |
| 802.11n (HT40) | 2TX,2RX |
| 802.11ac (VHT20) | 2TX,2RX |
| 802.11ac (VHT40) | 2TX,2RX |
| 802.11ac (VHT80) | 2TX,2RX |

* The modulation and bandwidth are similar for 802.11n mode for HT20 / HT40 and 802.11ac mode for VHT20 / VHT40 and tune up powers of 802.11n mode for HT20 / HT40 are same as 802.11ac mode for VHT20 / VHT40, therefore investigated worst case to representative mode in test report.

4. The above EUT information is declared by manufacturer and for more detailed features description, please refer the manufacturer's or user's manual.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Telephone :+886-2-7737-3000
Facsimile (FAX) :+886-3-583-7948



6.2. Channel List

FOR 5180 ~ 5240MHz

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 36 | 5180 MHz | 44 | 5220 MHz |
| 40 | 5200 MHz | 48 | 5240 MHz |

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 38 | 5190 MHz | 46 | 5230 MHz |

1 channel is provided for 802.11ac (VHT80):

| Channel | Frequency |
|---------|-----------|
| 42 | 5210MHz |

FOR 5260 ~ 5320MHz

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 52 | 5260 MHz | 60 | 5300 MHz |
| 56 | 5280 MHz | 64 | 5320 MHz |

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 54 | 5270 MHz | 62 | 5310 MHz |

1 channel is provided for 802.11ac (VHT80):

| Channel | Frequency |
|---------|-----------|
| 58 | 5290MHz |

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0



FOR 5500 ~ 5720MHz

12 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 100 | 5500 MHz | 124 | 5620 MHz |
| 104 | 5520 MHz | 128 | 5640 MHz |
| 108 | 5540 MHz | 132 | 5660 MHz |
| 112 | 5560 MHz | 136 | 5680 MHz |
| 116 | 5580 MHz | 140 | 5700 MHz |
| 120 | 5600 MHz | 144 | 5720 MHz |

6 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 102 | 5510 MHz | 126 | 5630 MHz |
| 110 | 5550 MHz | 134 | 5670 MHz |
| 118 | 5590 MHz | 142 | 5710 MHz |

3 channels are provided for 802.11ac (VHT80):

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 106 | 5530MHz | 138 | 5690MHz |
| 122 | 5610MHz | - | - |

FOR 5745 ~ 5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 149 | 5745MHz | 161 | 5805MHz |
| 153 | 5765MHz | 165 | 5825MHz |
| 157 | 5785MHz | - | - |

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 151 | 5755MHz | 159 | 5795MHz |

1 channel is provided for 802.11ac (VHT80):

| Channel | Frequency |
|---------|-----------|
| 155 | 5775MHz |

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948



6.3. Test Condition

| Test Item | Test Site No. | Environmental Condition | Input Power | Test Date | Tested by |
|------------------------------------|---------------|-------------------------|-------------|---------------------------|---------------------------|
| Antenna Port Conducted Measurement | SR4 | 23~26°C/ 60~65%RH | 5Vdc | 2021/08/09~ 2021/10/25 | Mike Cai |
| Radiated Spurious Emission | 966-2 | 23~26°C/ 60~65%RH | 5Vdc | 2021/09/06~ 2021/10/22 | Patrick Kuan/ Mike Cai |
| AC power Line Conducted Emission | SR1 | 23~26°C/ 60~65%RH | 5Vdc | 2021/10/07~ 2021/10/08 | Mike Cai |

FCC Test Firm Registration Number: 498077

6.4. Description of Available Antennas

| Ant. No. | Transmitter Circuit | Brand Name | Model Name | Ant. Type | Maximum Gain (dBi) | Remark |
|----------|---------------------|------------|------------|-----------|----------------------------|--------|
| 1 | Chain (0) | SparkLAN | N/A | PCB | 2.4GHz: 0.7 5GHz: 4.24 | Ant L |
| | Chain (1) | SparkLAN | N/A | PCB | 2.4GHz: 0.25 5GHz: 3.83 | Ant R |

Note: The above antenna information was provided from customer and for more detailed features description, please refer the manufacturer's specification or user's manual.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0



6.5. Test Mode Applicability and Tested Channel Detail

- For AC power line conducted emissions, the pre-scan has been determined by AC power 120Vac/60Hz (worst case).
- The fundamental of the EUT with PCB Antenna was investigated in three orthogonal axes X-Y/Y-Z/X-Z, it was determined that Y-Z plane was worst-case. Therefore, all final radiated testing was performed with the EUT in Y-Z plane.
- For Antenna Port Conducted Measurement, this item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- For below 30MHz testing, investigation was done on three antenna orientations (parallel, perpendicular, and ground-parallel), parallel and perpendicular are the worst orientations, therefore testing was performed on these two orientations only.
- For below 1 GHz radiated emission and AC power line conducted emission have performed all modes of operation were investigated and the worst-case emissions are reported.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

| Test Item | Mode | Modulation Technology | Modulation Type | Available Channel | Test Channel | Data Rate |
|----------------------------------|------------|-----------------------|-----------------|-------------------|--------------------|-----------|
| Radiated Emissions (Above 1GHz) | 802.11a | 5180-5240 | OFDM | 36 to 48 | 36, 44, 48 | 6Mbps |
| | 802.11ac20 | | | 36 to 48 | 36, 44, 48 | MCS0 |
| | 802.11ac40 | | | 38 to 46 | 38, 46 | MCS0 |
| | 802.11ac80 | | | 42 | 42 | MCS0 |
| | 802.11a | 5260-5320 | | 52 to 64 | 52, 60, 64 | 6Mbps |
| | 802.11ac20 | | | 52 to 64 | 52, 60, 64 | MCS0 |
| | 802.11ac40 | | | 54 to 62 | 54, 62 | MCS0 |
| | 802.11ac80 | | | 58 | 58 | MCS0 |
| | 802.11a | 5500-5720 | | 100 to 144 | 100, 116, 140, 144 | 6Mbps |
| | 802.11ac20 | | | 100 to 144 | 100, 116, 140, 144 | MCS0 |
| | 802.11ac40 | | | 102 to 142 | 102, 110, 134, 142 | MCS0 |
| | 802.11ac80 | | | 106, 122, 138 | 106, 122, 138 | MCS0 |
| | 802.11a | 5745-5825 | | 149 to 165 | 149, 157, 165 | 6Mbps |
| | 802.11ac20 | | | 149 to 165 | 149, 157, 165 | MCS0 |
| | 802.11ac40 | | | 151 to 159 | 151, 159 | MCS0 |
| | 802.11ac80 | | | 155 | 155 | MCS0 |
| Radiated Emissions (Below 1GHz) | 802.11ac20 | 5745-5825 | OFDM | 149 to 165 | 149 | MCS0 |
| AC Power Line Conducted Emission | 802.11ac20 | 5745-5825 | OFDM | 149 to 165 | 149 | MCS0 |

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0



| Test Item | Mode | Modulation Technology | Modulation Type | Available Channel | Test Channel | Data Rate |
|------------------------|------------|-----------------------|-----------------|-------------------|--------------------|-----------|
| Conducted Output Power | 802.11a | 5180-5240 | OFDM | 36 to 48 | 36, 44, 48 | 6Mbps |
| | 802.11ac20 | | | 36 to 48 | 36, 44, 48 | MCS0 |
| | 802.11ac40 | | | 38 to 46 | 38, 46 | MCS0 |
| | 802.11ac80 | | | 42 | 42 | MCS0 |
| | 802.11a | 5260-5320 | | 52 to 64 | 52, 60, 64 | 6Mbps |
| | 802.11ac20 | | | 52 to 64 | 52, 60, 64 | MCS0 |
| | 802.11ac40 | | | 54 to 62 | 54, 62 | MCS0 |
| | 802.11ac80 | | | 58 | 58 | MCS0 |
| | 802.11a | 5500-5720 | | 100 to 144 | 100, 116, 140, 144 | 6Mbps |
| | 802.11ac20 | | | 100 to 144 | 100, 116, 140, 144 | MCS0 |
| | 802.11ac40 | | | 102 to 142 | 102, 110, 134, 142 | MCS0 |
| | 802.11ac80 | | | 106, 122, 138 | 106, 122, 138 | MCS0 |
| | 802.11a | 5745-5825 | | 149 to 165 | 149, 157, 165 | 6Mbps |
| | 802.11ac20 | | | 149 to 165 | 149, 157, 165 | MCS0 |
| | 802.11ac40 | | | 151 to 159 | 151, 159 | MCS0 |
| | 802.11ac80 | | | 155 | 155 | MCS0 |

Simultaneously transmission condition:

| Condition | Technology | |
|-----------|-----------------------|-------------------|
| 1 | WLAN (2.4GHz), Chain0 | Bluetooth, Chain1 |
| 2 | WLAN (5GHz), Chain0 | Bluetooth Chain1 |

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0




6.6. Duty cycle

802.11a: Duty cycle = 1/1 = 100%, duty cycle of test signal is $\geq 98\%$, duty factor is not required.

802.11ac(VHT20): Duty cycle = 1/1 = 100%, duty cycle of test signal is $\geq 98\%$, duty factor is not required.

802.11ac(VHT40): Duty cycle = 1/1 = 100%, duty cycle of test signal is $\geq 98\%$, duty factor is not required.

802.11ac(VHT80): Duty cycle = 1/1 = 100%, duty cycle of test signal is $\geq 98\%$, duty factor is not required.

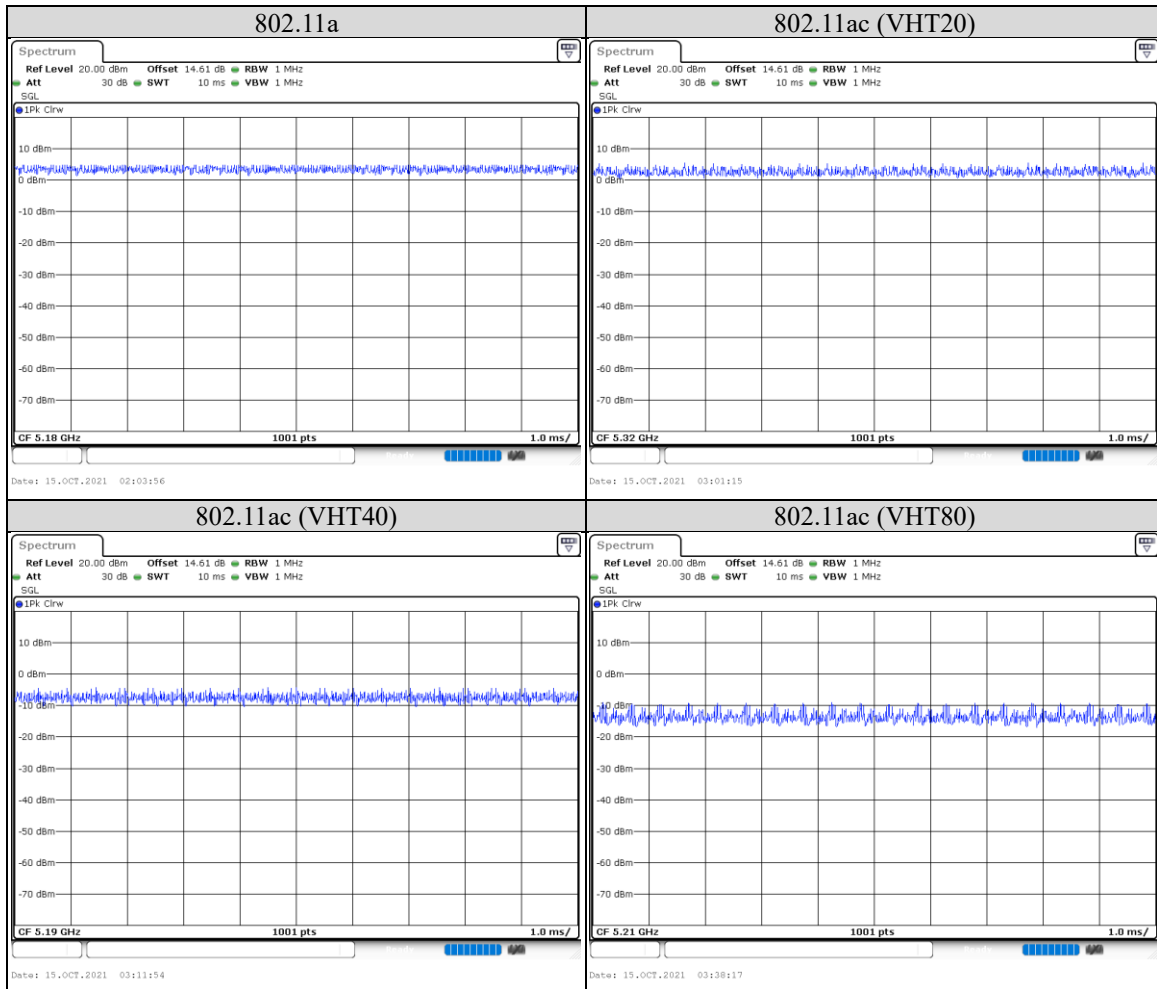



7. Test Equipment

| Test Equipment List | | | | | |
|--|--------------------|-------------------------|---------------------|------------|--------------|
| Equipment | Manufacturer | Model No. | Serial No. | Cal. Date | Expired date |
| Radiated Spurious Emission | | | | | |
| Spectrum Analyzer | Keysight | N9010A | MY56070827 | 2020/11/11 | 2021/11/10 |
| EMI Test Receiver | Rohde & Schwarz | ESR7 | 101754 | 2020/12/11 | 2021/12/10 |
| Loop Antenna | ETS lindgren | 6502 | 00213440 | 2020/12/25 | 2021/12/24 |
| Trilog-Broadband Antenna with 5dB Attenuator | Schwarzbeck & EMCI | VULB 9168 & N-6-05 | 774 & AT-N0538 | 2021/1/13 | 2022/1/12 |
| Horn Antenna (1-18 GHz) | Schwarzbeck | BBHA 9120 D | 01690 | 2020/12/30 | 2021/12/29 |
| Horn Antenna (18-40 GHz) | Schwarzbeck | BBHA 9170 | 781 | 2020/12/30 | 2021/12/29 |
| Preamplifier (30-1000 MHz) | EMCI | EMC330E | 980405 | 2021/6/8 | 2022/6/7 |
| Preamplifier (1-18 GHz) | EMCI | EMC051835BE | 980406 | 2021/2/3 | 2022/2/2 |
| Preamplifier (18-40GHz) | EMCI | EMC184040SEE | 980426 | 2021/5/19 | 2022/5/18 |
| Cables | Hanyitek | K1K50-UP0264-K1K50-2500 | 170214-4 & 170425-2 | 2021/1/22 | 2022/1/21 |
| Cables | Hanyitek | K1K50-UP0264-K1K50-2500 | 170214-1 & 170214-2 | 2021/1/22 | 2022/1/21 |

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0



Test report No. : 4790038917B-US-R1-V0
Page : 17 of 123
Issued date : 2022/1/13
FCC ID : RYK-WUBT239ACND

| Test Equipment List | | | | | |
|-------------------------------------|-----------------|------------------|--------------------------|------------|--------------|
| Equipment | Manufacturer | Model No. | Serial No. | Cal. Date | Expired date |
| Antenna Port Conducted Measurement | | | | | |
| Spectrum Analyzer | Keysight | N9010A | MY56070834 | 2020/11/6 | 2021/11/5 |
| Pulse Power Sensor | Anritsu | MA2411B | 1531202 | 2020/12/21 | 2021/12/20 |
| Power Meter | Anritsu | ML2495A | 1645002 | 2020/12/21 | 2021/12/20 |
| Temperature & Humidity Test Chamber | GIANT FORCE | GTH-150-40-CP-AR | MAA1701-010 | 2021/3/22 | 2022/3/21 |
| AC power Line Conducted Emission | | | | | |
| EMI Test Receiver | Rohde & Schwarz | ESR7 | 101753 | 2020/11/17 | 2021/11/16 |
| Two-Line V-Network | Rohde & Schwarz | ENV216 | 102136 | 2021/8/30 | 2022/8/29 |
| Impuls-Begrenzer Pulse Limiter | Rohde & Schwarz | ESH3-Z2 | 102219-Qt | 2021/8/26 | 2022/8/25 |
| Cables | TITAN | CFD200 | T0732ACFD20 020A300-1 | 2021/3/2 | 2022/3/1 |

| UL Software | | |
|----------------------------------|-------------------------|----------------|
| Description | Name | Version |
| Radiated measurement | e3 | 6.191211 (V6) |
| Conducted measurement | RF Conducted Test Tools | ver 2.4.0.620b |
| AC power Line Conducted Emission | EZ_EMG | UL-3A1.2 |

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0



8. Description of Test Setup

Support Equipment

| ID | Equipment | Brand Name | Model Name | S/N | Remark |
|----|-----------|------------|------------|----------|----------------|
| A | Laptop | Lenovo | T460 | PC0FWU5Y | Provide by lab |

I/O Cables

| ID | Equipment | Brand Name | Model Name | Length (m) | Remark |
|----|-----------|------------|------------|------------|----------------|
| 1 | USB Cable | fujiei | Z08145 | 1 | Provide by lab |

Test Setup

Controlled using a bespoke application (RTL8822CU MP Diagnostic Program 0.0001.1020.2018) on a test Notebook. The application was used to enable a continuous transmission mode and to select the test channels, data rates, modulation schemes and power setting as required.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0



Setup Diagram for Radiated Spurious Emission Test

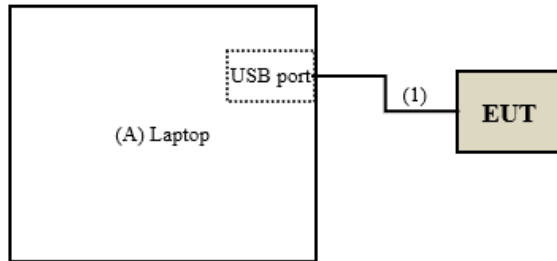

Under Table

Remote Site

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0



Setup Diagram for AC Power Line Conducted Emission Test

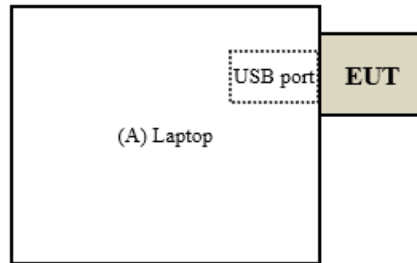

Under Table

Remote Site

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0



9. Test Results

9.1. Conducted output power

Requirements

| Operation Band | EUT Category | | Limit |
|----------------|--------------|-----------------------------------|--|
| U-NII-1 | | Outdoor Access Point | 1 Watt (30 dBm) Max. e.i.r.p \leq 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ |
| | | Fixed point-to-point Access Point | 1 Watt (30 dBm) If $G_{TX} > 23$ dBi, then $P_{Out} = 30 - (G_{TX} - 23)$ |
| | | Indoor Access Point | 1 Watt (30 dBm) If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ |
| | √ | Client device | 250mW (24 dBm) If $G_{TX} > 6$ dBi, then $P_{Out} = 23.98 - (G_{TX} - 6)$ |
| U-NII-2A | √ | | 250mW (24 dBm) or $11 \text{ dBm} + 10 \log B^*$ If $G_{TX} > 6$ dBi, then $P_{Out} = 23.98 - (G_{TX} - 6)$ |
| U-NII-2C | √ | | 250mW (24 dBm) or $11 \text{ dBm} + 10 \log B^*$ If $G_{TX} > 6$ dBi, then $P_{Out} = 23.98 - (G_{TX} - 6)$ |
| U-NII-3 | √ | | For Point-to-multipoint systems (P2M): 1 Watt (30 dBm). If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ For Point-to-point systems (P2P): 1 Watt (30 dBm) |

Note:

- P_{Out} = maximum conducted output power in dBm,
- G_{TX} = the maximum transmitting antenna directional gain in dBi.
- B is the 26 dB emission bandwidth in megahertz
- Directional Gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{Gn/20})^2 / N_{ant}]$ dBi.
 N_{ant} : Number of Transmit Antennas
 $G1, G2, \dots, Gn$: Gain of Individual Antennas
- Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,
Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;
Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;
Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Telephone : +886-2-7737-3000
Facsimile (FAX) : +886-3-583-7948



Test Procedure

For Average Power Measurement

Test method PM-G

For 802.11a, 802.11ac (VHT20), 802.11ac (VHT40)

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst and set the detector to AVERAGE. Duty factor is not added to measured value.

Test method SA-1

For 802.11ac (VHT80)

- a. Set span to encompass the entire 26 dB EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- b. Set sweep trigger*.
- c. Set RBW = 1 MHz.
- d. Set VBW \geq 3 MHz
- e. Number of points in sweep \geq 2 Span / RBW.
- f. Sweep time \leq (number of points in sweep) * T
- g. Using emission bandwidth to determine the frequency span for integration the channel bandwidth.
- h. Detector = RMS.
- i. Trace mode = max hold.
- j. Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.

* If transmit duty cycle < 98%, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle \geq 98%, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run.”

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000


Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0




Test Setup

For Average Power Measurement



The loss between RF output port of the EUT and the input port of the Power Meter has been taken into consideration.



The loss between RF output port of the EUT and the input port of the Spectrum Analyzer has been taken into consideration.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0



Test Data

802.11a

| Channel | Channel Frequency (MHz) | Maximum Conducted Power (dBm) | | Total Power (mW) | Total Power (dBm) | Power Limit (dBm) | Pass/Fail |
|------------------------|-------------------------|-------------------------------|---------|------------------|-------------------|-------------------|-----------|
| | | Chain 0 | Chain 1 | | | | |
| 36 | 5180 | 13.86 | 12.85 | 43.551 | 16.39 | 23.98 | PASS |
| 44 | 5220 | 13.42 | 12.72 | 40.644 | 16.09 | 23.98 | PASS |
| 48 | 5240 | 13.82 | 12.71 | 42.756 | 16.31 | 23.98 | PASS |
| 52 | 5260 | 13.44 | 14.80 | 52.24 | 17.18 | 23.66 | PASS |
| 60 | 5300 | 13.52 | 14.71 | 52.119 | 17.17 | 23.68 | PASS |
| 64 | 5320 | 13.90 | 14.71 | 54.075 | 17.33 | 23.67 | PASS |
| 100 | 5500 | 11.84 | 15.51 | 50.816 | 17.06 | 23.65 | PASS |
| 116 | 5580 | 11.75 | 15.58 | 51.05 | 17.08 | 23.66 | PASS |
| 140 | 5700 | 11.81 | 15.47 | 50.35 | 17.02 | 23.66 | PASS |
| 144 (U-NII-2c Band) | 5720 | 10.67 | 14.34 | 38.815 | 15.89 | 22.53 | PASS |
| 144 (U-NII-3 Band) | 5720 | 5.31 | 9.03 | 11.402 | 10.57 | 30 | PASS |
| 149 | 5745 | 12.58 | 14.57 | 46.774 | 16.70 | 30 | PASS |
| 157 | 5785 | 12.90 | 14.77 | 49.545 | 16.95 | 30 | PASS |
| 165 | 5825 | 12.67 | 14.77 | 48.529 | 16.86 | 30 | PASS |

Note: The directional gain = 4.24 dBi < 6 dBi, so the power limit shall not be reduced.

For Reference only – Straddle Channels Total Power

| Channel | Channel Frequency (MHz) | Maximum Conducted Power (dBm) | | Total Power (mW) | Total Power (dBm) |
|---------|-------------------------|-------------------------------|---------|------------------|-------------------|
| | | Chain 0 | Chain 1 | | |
| 144 | 5720 | 11.78 | 15.46 | 50.234 | 17.01 |

Note: The total power was calculated through formula and record the value for reference only.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0



802.11ac (VHT20)

| Channel | Channel Frequency (MHz) | Maximum Conducted Power (dBm) | | Total Power (mW) | Total Power (dBm) | Power Limit (dBm) | Pass/Fail |
|---------------------|-------------------------|-------------------------------|---------|------------------|-------------------|-------------------|-----------|
| | | Chain 0 | Chain 1 | | | | |
| 36 | 5180 | 13.86 | 12.88 | 43.752 | 16.41 | 23.98 | PASS |
| 44 | 5220 | 13.74 | 12.83 | 42.855 | 16.32 | 23.98 | PASS |
| 48 | 5240 | 14.30 | 12.57 | 44.978 | 16.53 | 23.98 | PASS |
| 52 | 5260 | 14.45 | 14.49 | 55.976 | 17.48 | 23.91 | PASS |
| 60 | 5300 | 14.61 | 14.83 | 59.293 | 17.73 | 23.91 | PASS |
| 64 | 5320 | 12.42 | 14.09 | 43.152 | 16.35 | 23.91 | PASS |
| 100 | 5500 | 11.63 | 15.57 | 50.582 | 17.04 | 23.9 | PASS |
| 116 | 5580 | 11.78 | 15.75 | 52.602 | 17.21 | 23.92 | PASS |
| 140 | 5700 | 11.69 | 15.69 | 51.88 | 17.15 | 23.95 | PASS |
| 144 (U-NII-2c Band) | 5720 | 10.71 | 14.43 | 39.537 | 15.97 | 22.72 | PASS |
| 144 (U-NII-3 Band) | 5720 | 5.75 | 9.50 | 12.677 | 11.03 | 30 | PASS |
| 149 | 5745 | 12.48 | 14.84 | 48.195 | 16.83 | 30 | PASS |
| 157 | 5785 | 12.96 | 14.55 | 48.306 | 16.84 | 30 | PASS |
| 165 | 5825 | 12.43 | 14.51 | 45.709 | 16.60 | 30 | PASS |

Note: The directional gain = 4.24 dBi < 6 dBi, so the power limit shall not be reduced.

For Reference only – Straddle Channels Total Power

| Channel | Channel Frequency (MHz) | Maximum Conducted Power (dBm) | | Total Power (mW) | Total Power (dBm) |
|---------|-------------------------|-------------------------------|---------|------------------|-------------------|
| | | Chain 0 | Chain 1 | | |
| 144 | 5720 | 11.91 | 15.64 | 52.119 | 17.17 |

Note: The total power was calculated through formula and record the value for reference only.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948



802.11ac (VHT40)

| Channel | Channel Frequency (MHz) | Maximum Conducted Power (dBm) | | Total Power (mW) | Total Power (dBm) | Power Limit (dBm) | Pass/Fail |
|---------------------|-------------------------|-------------------------------|---------|------------------|-------------------|-------------------|-----------|
| | | Chain 0 | Chain 1 | | | | |
| 38 | 5190 | 9.57 | 11.19 | 22.233 | 13.47 | 23.98 | PASS |
| 46 | 5230 | 13.72 | 13.55 | 46.238 | 16.65 | 23.98 | PASS |
| 54 | 5270 | 13.71 | 15.66 | 60.256 | 17.80 | 23.98 | PASS |
| 62 | 5310 | 9.93 | 10.90 | 22.131 | 13.45 | 23.98 | PASS |
| 102 | 5510 | 9.47 | 10.76 | 20.749 | 13.17 | 23.98 | PASS |
| 110 | 5550 | 11.66 | 15.99 | 54.325 | 17.35 | 23.98 | PASS |
| 134 | 5670 | 11.45 | 16.00 | 53.827 | 17.31 | 23.98 | PASS |
| 142 (U-NII-2c Band) | 5710 | 11.24 | 14.95 | 44.566 | 16.49 | 23.98 | PASS |
| 142 (U-NII-3 Band) | 5710 | 3.41 | 7.21 | 7.464 | 8.73 | 30 | PASS |
| 151 | 5755 | 12.36 | 14.48 | 45.29 | 16.56 | 30 | PASS |
| 159 | 5795 | 12.80 | 14.65 | 48.195 | 16.83 | 30 | PASS |

Note: The directional gain = 4.24 dBi < 6 dBi, so the power limit shall not be reduced.

For Reference only – Straddle Channels Total Power

| Channel | Channel Frequency (MHz) | Maximum Conducted Power (dBm) | | Total Power (mW) | Total Power (dBm) |
|---------|-------------------------|-------------------------------|---------|------------------|-------------------|
| | | Chain 0 | Chain 1 | | |
| 142 | 5710 | 11.90 | 15.63 | 52 | 17.16 |

Note: The total power was calculated through formula and record the value for reference only.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0



802.11ac (VHT80)

| Channel | Channel Frequency (MHz) | Maximum Conducted Power (dBm) | | Total Power (mW) | Total Power (dBm) | Power Limit (dBm) | Pass/Fail |
|------------------------|-------------------------|-------------------------------|---------|------------------|-------------------|-------------------|-----------|
| | | Chain 0 | Chain 1 | | | | |
| 42 | 5210 | 7.33 | 9.08 | 13.49 | 11.30 | 23.98 | PASS |
| 58 | 5290 | 7.29 | 8.95 | 13.213 | 11.21 | 23.98 | PASS |
| 106 | 5530 | 10.72 | 11.45 | 25.763 | 14.11 | 23.98 | PASS |
| 122 | 5610 | 12.56 | 15.53 | 53.703 | 17.30 | 23.98 | PASS |
| 138 (U-NII-2c Band) | 5690 | 11.12 | 14.48 | 41.02 | 16.13 | 23.98 | PASS |
| 138 (U-NII-3 Band) | 5690 | 6.30 | 9.87 | 13.964 | 11.45 | 30 | PASS |
| 155 | 5775 | 12.61 | 14.76 | 48.195 | 16.83 | 30 | PASS |

Note: The directional gain = 4.24 dBi < 6 dBi, so the power limit shall not be reduced.

For Reference only – Straddle Channels Total Power

| Channel | Channel Frequency (MHz) | Maximum Conducted Power (dBm) | | Total Power (mW) | Total Power (dBm) |
|---------|-------------------------|-------------------------------|---------|------------------|-------------------|
| | | Chain 0 | Chain 1 | | |
| 138 | 5690 | 12.36 | 15.77 | 54.954 | 17.40 |

Note: The total power was calculated through formula and record the value for reference only.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0



9.2. Radiated Spurious Emission

Requirements

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

| Frequency(MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|----------------|--------------------------------------|----------------------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30.0 | 30 | 30 |
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0



Limits of unwanted emission out of the restricted bands

| Applicable To | | Limit | |
|---|-----------------|---|---|
| 789033 D02 General UNII Test Procedure New Rules v02r01 | | Field Strength at 3m | |
| | | PK:74 (dBμV/m) | AV:54 (dBμV/m) |
| Frequency Band | Applicable To | EIRP Limit | Equivalent Field Strength at 3m |
| 5150~5250 MHz | 15.407(b)(1) | PK:-27 (dBm/MHz) | PK:68.2(dBμV/m) |
| 5250~5350 MHz | 15.407(b)(2) | | |
| 5470~5725 MHz | 15.407(b)(3) | | |
| 5725~5850 MHz | 15.407(b)(4)(i) | PK:-27 (dBm/MHz) *1 PK:10 (dBm/MHz) *2 PK:15.6 (dBm/MHz) *3 PK:27 (dBm/MHz) *4 | PK: 68.2(dBμV/m) *1 PK:105.2 (dBμV/m) *2 PK: 110.8(dBμV/m) *3 PK:122.2 (dBμV/m) *4 |
| *1 beyond 75 MHz or more above of the band edge. *2 below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above. *3 below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above. *4 from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. | | | |

Note:

The following formula is used to convert the effective isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0



Test Procedures

[For 9 kHz ~ 30 MHz]

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. For measurement below 30MHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

[For above 30 MHz]

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0



Note:

- a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- b. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
- c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.

| Configuration | Average | |
|------------------|---------|------|
| | RBW | VBW |
| 802.11a | 1MHz | 10Hz |
| 802.11ac (VHT20) | | 10Hz |
| 802.11ac (VHT40) | | 10Hz |
| 802.11ac (VHT80) | | 10Hz |


Note: Refer to section 6.6 for duty cycle.

- d. All modes of operation were investigated (includes all external accessories) and the worst-case emissions are reported.
- e. Test data of Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
- f. Test data of Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
- g. Test data of Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) - Preamp Factor (dB).
- h. Test data of Notation "@" = Fundamental Frequency
- i. Test data of Notation "*" = Only required peak limit or the peak result under 20 dB above and complies with AVG limit, AVG result is deemed to comply with AVG limit.


Underwriters Laboratories Taiwan Co., Ltd.

Test Setup

<Frequency Range 9 kHz ~ 30 MHz>

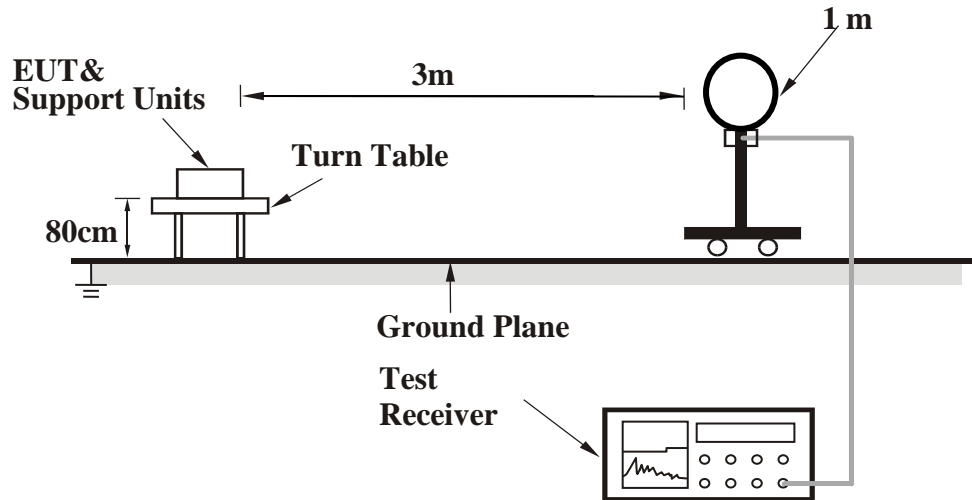

<Frequency Range 30 MHz ~ 1 GHz >

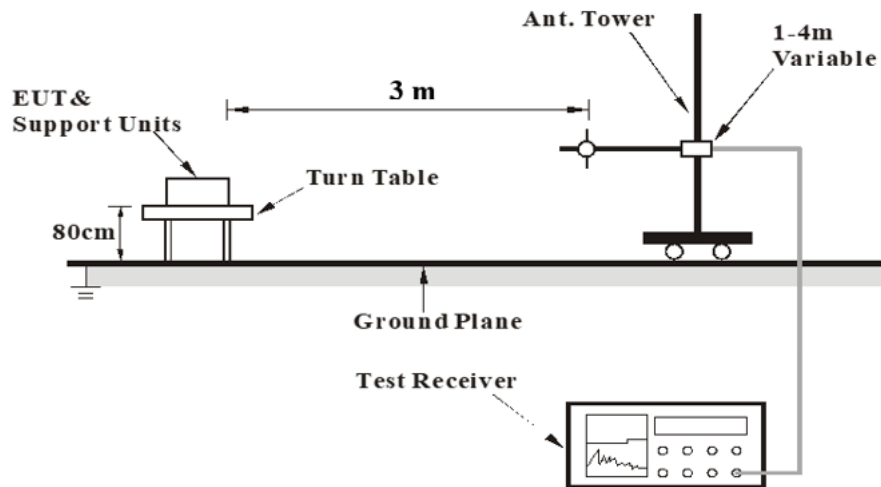

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: 17-EM-F0878 / 6.0



<Frequency Range above 1 GHz>

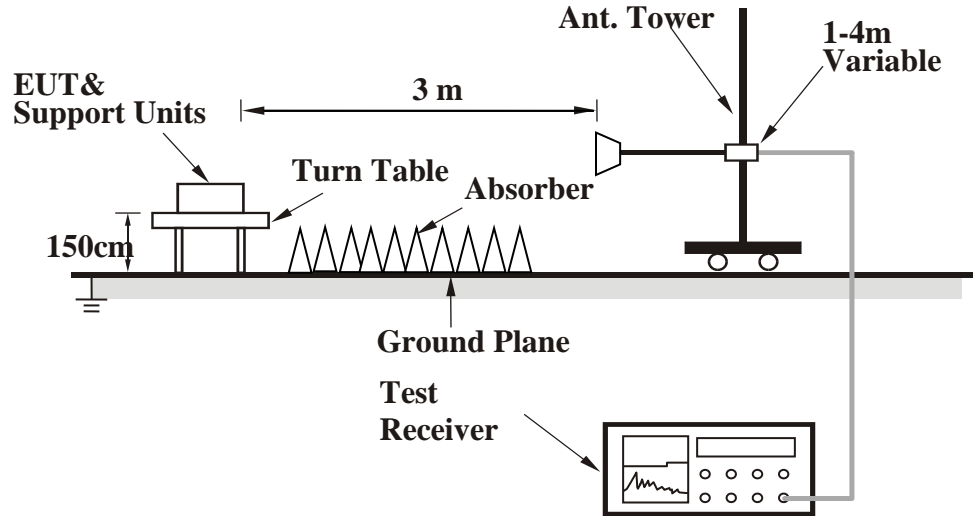

For the actual test configuration, please refer to the Setup Configurations.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0



Test Data

Above 1G

| | | | |
|------|---------|---------|----|
| Mode | 802.11a | Channel | 36 |
|------|---------|---------|----|

| Polarization | Notation | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|--------------|----------|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| Horizontal | | 5069.3 | 42.06 | 13.37 | 55.43 | 74 | -18.57 | PK |
| | | 5107.8 | 30.17 | 13.45 | 43.62 | 54 | -10.38 | AVG |
| | @ | 5180 | 88.53 | 13.4 | 101.93 | N/A | N/A | PK |
| | @ | 5180 | 81.22 | 13.4 | 94.62 | N/A | N/A | AVG |
| | | 10360 | 31.92 | 17.39 | 49.31 | 68.2 | -18.89 | PK |
| Vertical | | 5056 | 36.95 | 13.32 | 50.27 | 74 | -23.73 | PK |
| | | 5100.1 | 32.93 | 13.46 | 46.39 | 54 | -7.61 | AVG |
| | @ | 5180 | 88.78 | 13.4 | 102.18 | N/A | N/A | PK |
| | @ | 5180 | 87.76 | 13.4 | 101.16 | N/A | N/A | AVG |
| | | 10360 | 31.24 | 17.39 | 48.63 | 68.2 | -19.57 | PK |


Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0

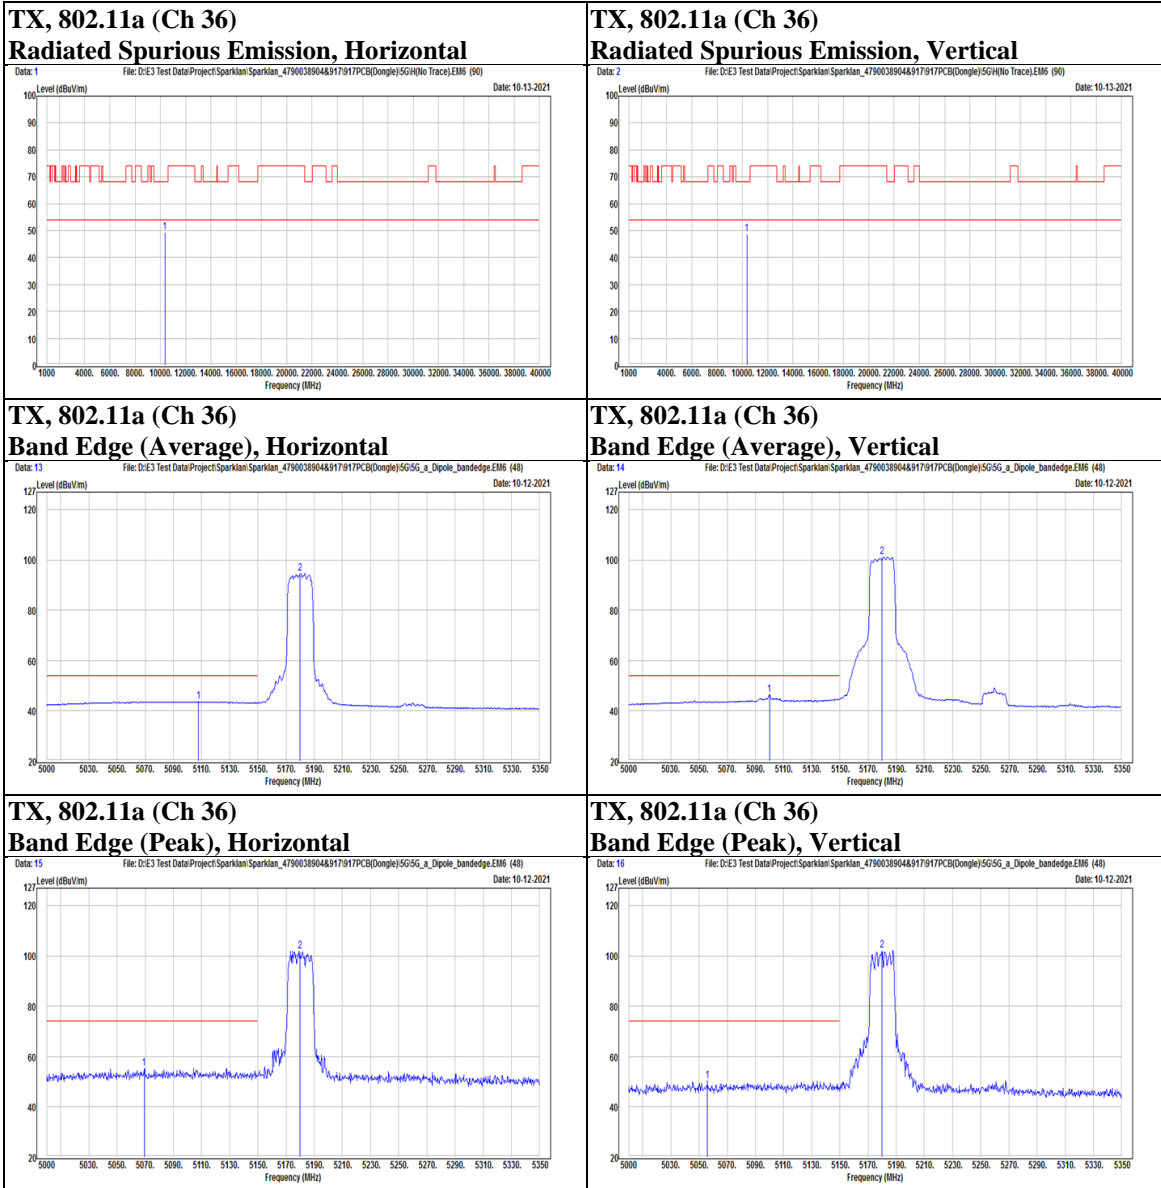



| | | | |
|------|---------|---------|----|
| Mode | 802.11a | Channel | 44 |
|------|---------|---------|----|

| Polarization | Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
|--------------|----------|-----------|---------|---------|----------|----------|--------|--------|
| | | (MHz) | (dBuV) | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | |
| Horizontal | | 5097.65 | 30.25 | 13.46 | 43.71 | 54 | -10.29 | AVG |
| | | 5108.85 | 42.26 | 13.45 | 55.71 | 74 | -18.29 | PK |
| | @ | 5220 | 91.58 | 13.33 | 104.91 | N/A | N/A | PK |
| | @ | 5220 | 82.64 | 13.33 | 95.97 | N/A | N/A | AVG |
| | | 10440 | 31.06 | 17.63 | 48.69 | 68.2 | -19.51 | PK |
| Vertical | | 5098.7 | 30.3 | 13.46 | 43.76 | 54 | -10.24 | AVG |
| | | 5143.5 | 36.86 | 13.43 | 50.29 | 74 | -23.71 | PK |
| | @ | 5220 | 90.46 | 13.33 | 103.79 | N/A | N/A | PK |
| | @ | 5220 | 87.2 | 13.33 | 100.53 | N/A | N/A | AVG |
| | | 10440 | 31.95 | 17.63 | 49.58 | 68.2 | -18.62 | PK |


Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0

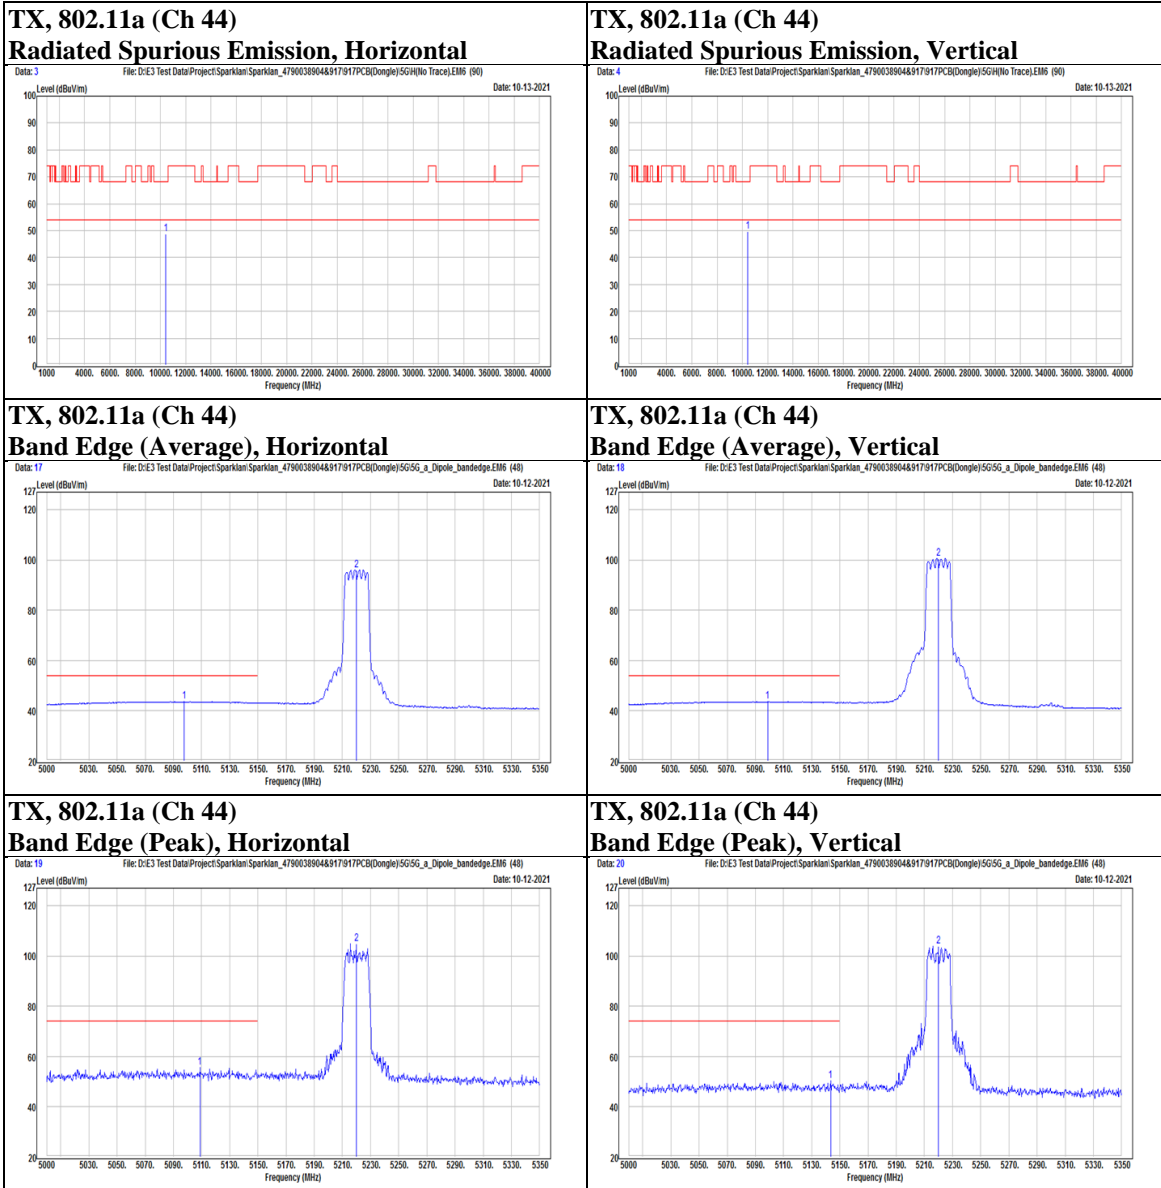



| | | | |
|------|---------|---------|----|
| Mode | 802.11a | Channel | 48 |
|------|---------|---------|----|

| Polarization | Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
|--------------|----------|-----------|---------|---------|----------|----------|--------|--------|
| | | (MHz) | (dBuV) | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | |
| Horizontal | | 5102.2 | 30.29 | 13.46 | 43.75 | 54 | -10.25 | AVG |
| | | 5105.7 | 41.68 | 13.46 | 55.14 | 74 | -18.86 | PK |
| | @ | 5240 | 89.62 | 13.27 | 102.89 | N/A | N/A | PK |
| | @ | 5240 | 83.09 | 13.27 | 96.36 | N/A | N/A | AVG |
| | | 10480 | 33.28 | 17.69 | 50.97 | 68.2 | -17.23 | PK |
| Vertical | | 5119.35 | 38.18 | 13.45 | 51.63 | 74 | -22.37 | PK |
| | | 5133.35 | 30.51 | 13.43 | 43.94 | 54 | -10.06 | AVG |
| | @ | 5240 | 89.8 | 13.27 | 103.07 | N/A | N/A | PK |
| | @ | 5240 | 87.34 | 13.27 | 100.61 | N/A | N/A | AVG |
| | | 10480 | 31.35 | 17.69 | 49.04 | 68.2 | -19.16 | PK |


Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0

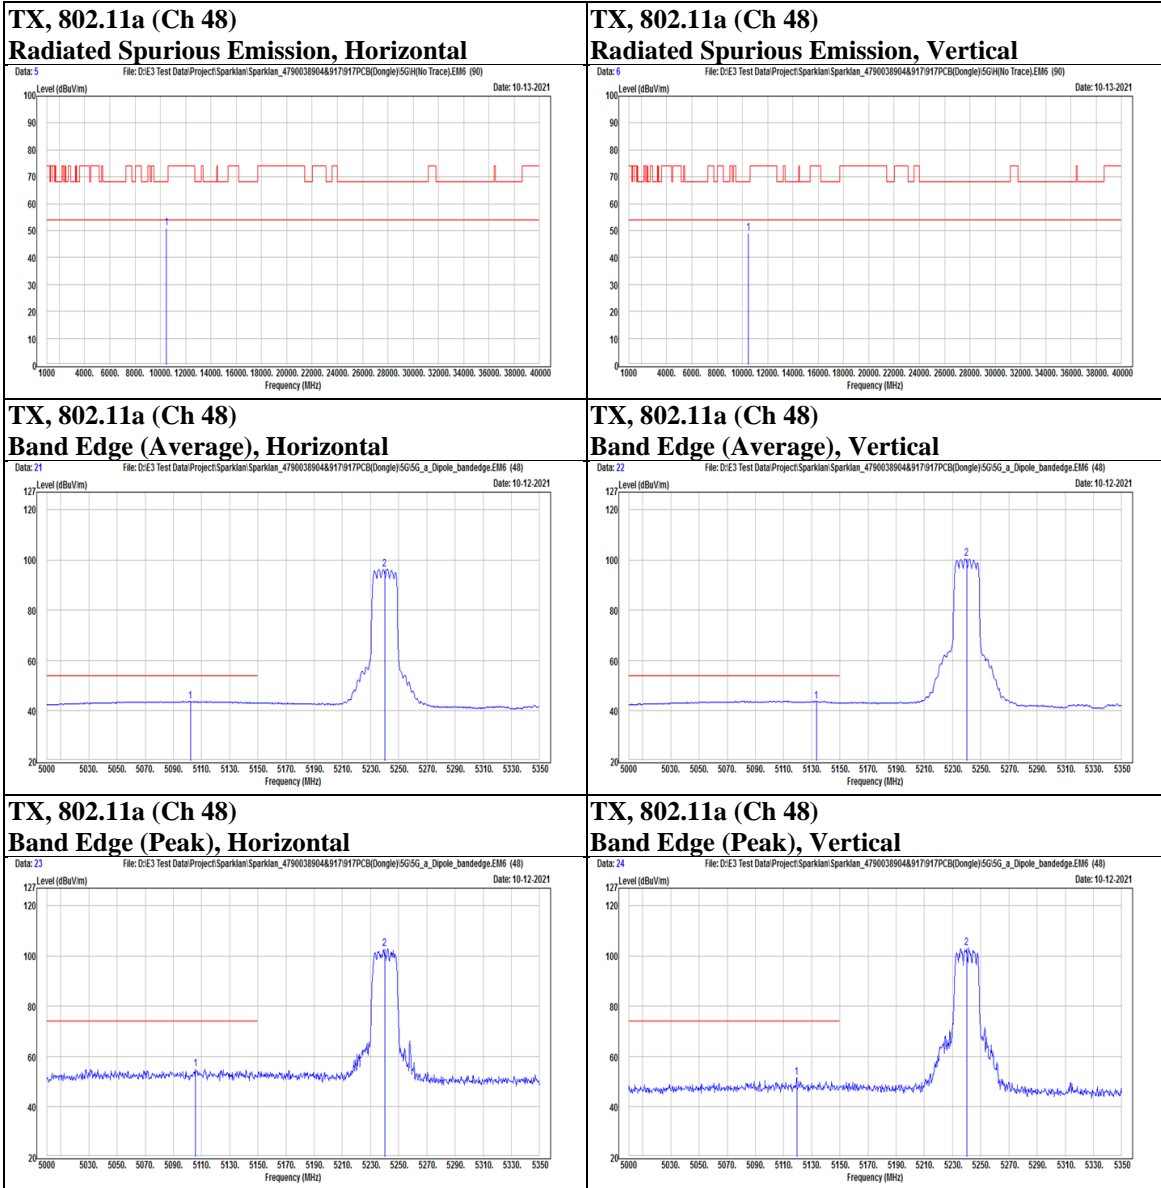



| | | | |
|------|---------|---------|----|
| Mode | 802.11a | Channel | 52 |
|------|---------|---------|----|

| Polarization | Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
|--------------|----------|-----------|---------|---------|----------|----------|--------|--------|
| | | (MHz) | (dBuV) | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | |
| Horizontal | @ | 5260 | 89.71 | 13.24 | 102.95 | N/A | N/A | PK |
| | @ | 5260 | 82.15 | 13.24 | 95.39 | N/A | N/A | AVG |
| | | 5366.7 | 29.19 | 13.31 | 42.5 | 54 | -11.5 | AVG |
| | | 5433.6 | 40.22 | 13.59 | 53.81 | 74 | -20.19 | PK |
| | | 10520 | 30.9 | 17.73 | 48.63 | 68.2 | -19.57 | PK |
| Vertical | @ | 5260 | 94.9 | 13.24 | 108.14 | N/A | N/A | PK |
| | @ | 5260 | 87.05 | 13.24 | 100.29 | N/A | N/A | AVG |
| | | 5366.4 | 30.03 | 13.31 | 43.34 | 54 | -10.66 | AVG |
| | | 5404.2 | 40.53 | 13.45 | 53.98 | 74 | -20.02 | PK |
| | | 10520 | 31.34 | 17.73 | 49.07 | 68.2 | -19.13 | PK |


Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0

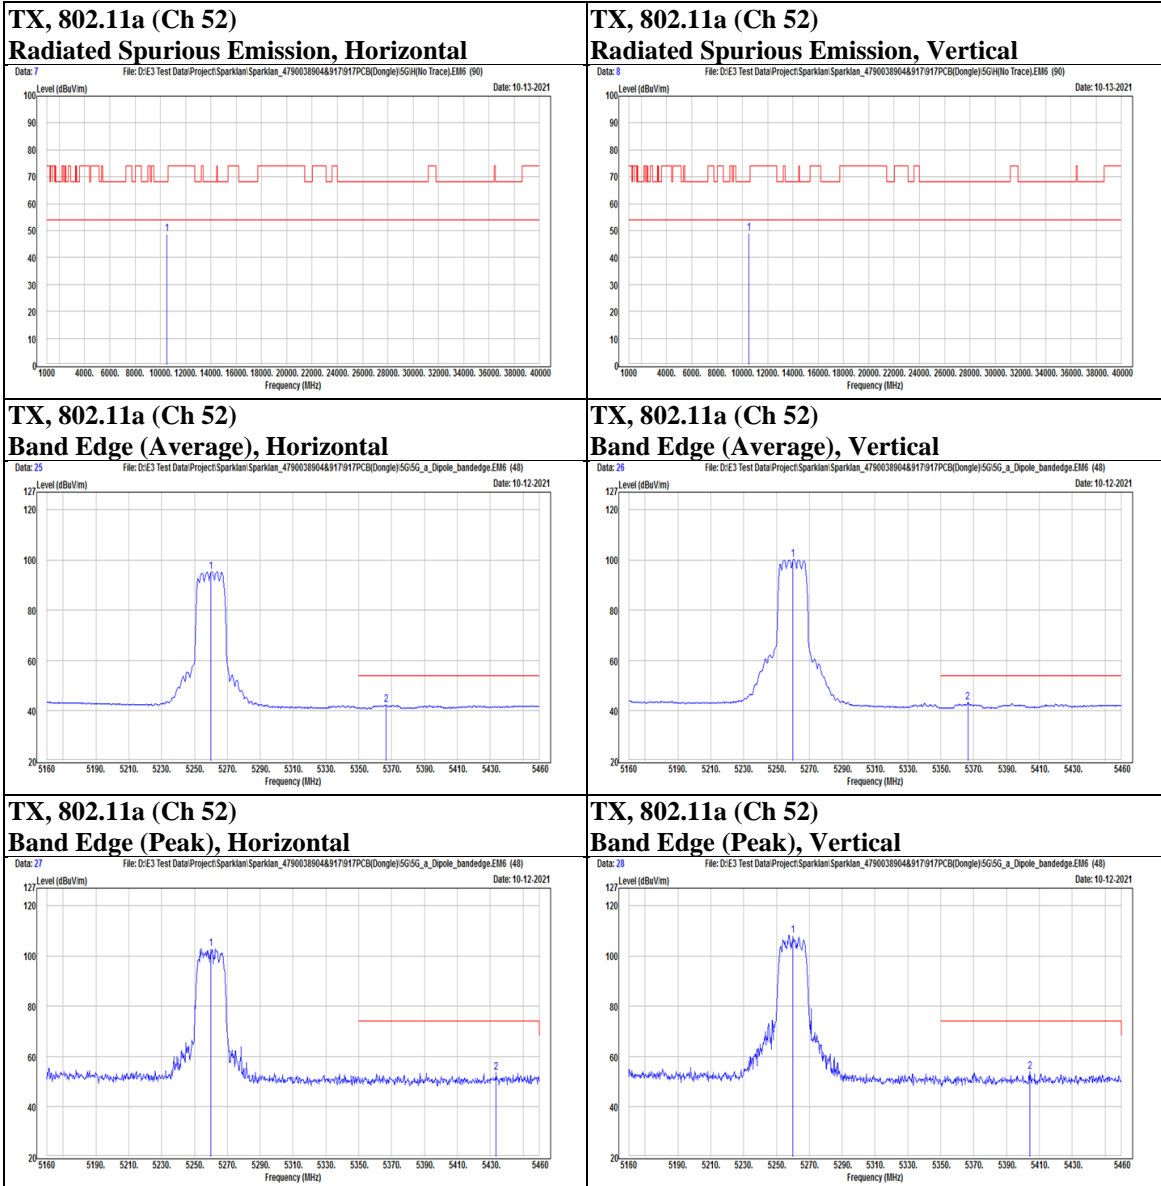



| | | | |
|------|---------|---------|----|
| Mode | 802.11a | Channel | 60 |
|------|---------|---------|----|

| Polarization | Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
|--------------|----------|-----------|---------|---------|----------|----------|--------|--------|
| | | (MHz) | (dBuV) | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | |
| Horizontal | @ | 5300 | 91.97 | 13.21 | 105.18 | N/A | N/A | PK |
| | @ | 5300 | 83.2 | 13.21 | 96.41 | N/A | N/A | AVG |
| | | 5456.1 | 39.29 | 13.69 | 52.98 | 74 | -21.02 | PK |
| | | 5460 | 29.41 | 13.7 | 43.11 | 54 | -10.89 | AVG |
| | | 10600 | 31.78 | 17.73 | 49.51 | 68.2 | -18.69 | PK |
| Vertical | @ | 5300 | 94.73 | 13.21 | 107.94 | N/A | N/A | PK |
| | @ | 5300 | 86.48 | 13.21 | 99.69 | N/A | N/A | AVG |
| | | 5455.8 | 30.9 | 13.69 | 44.59 | 54 | -9.41 | AVG |
| | | 5457.6 | 40.88 | 13.7 | 54.58 | 74 | -19.42 | PK |
| | | 10600 | 30.75 | 17.73 | 48.48 | 68.2 | -19.72 | PK |


Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0

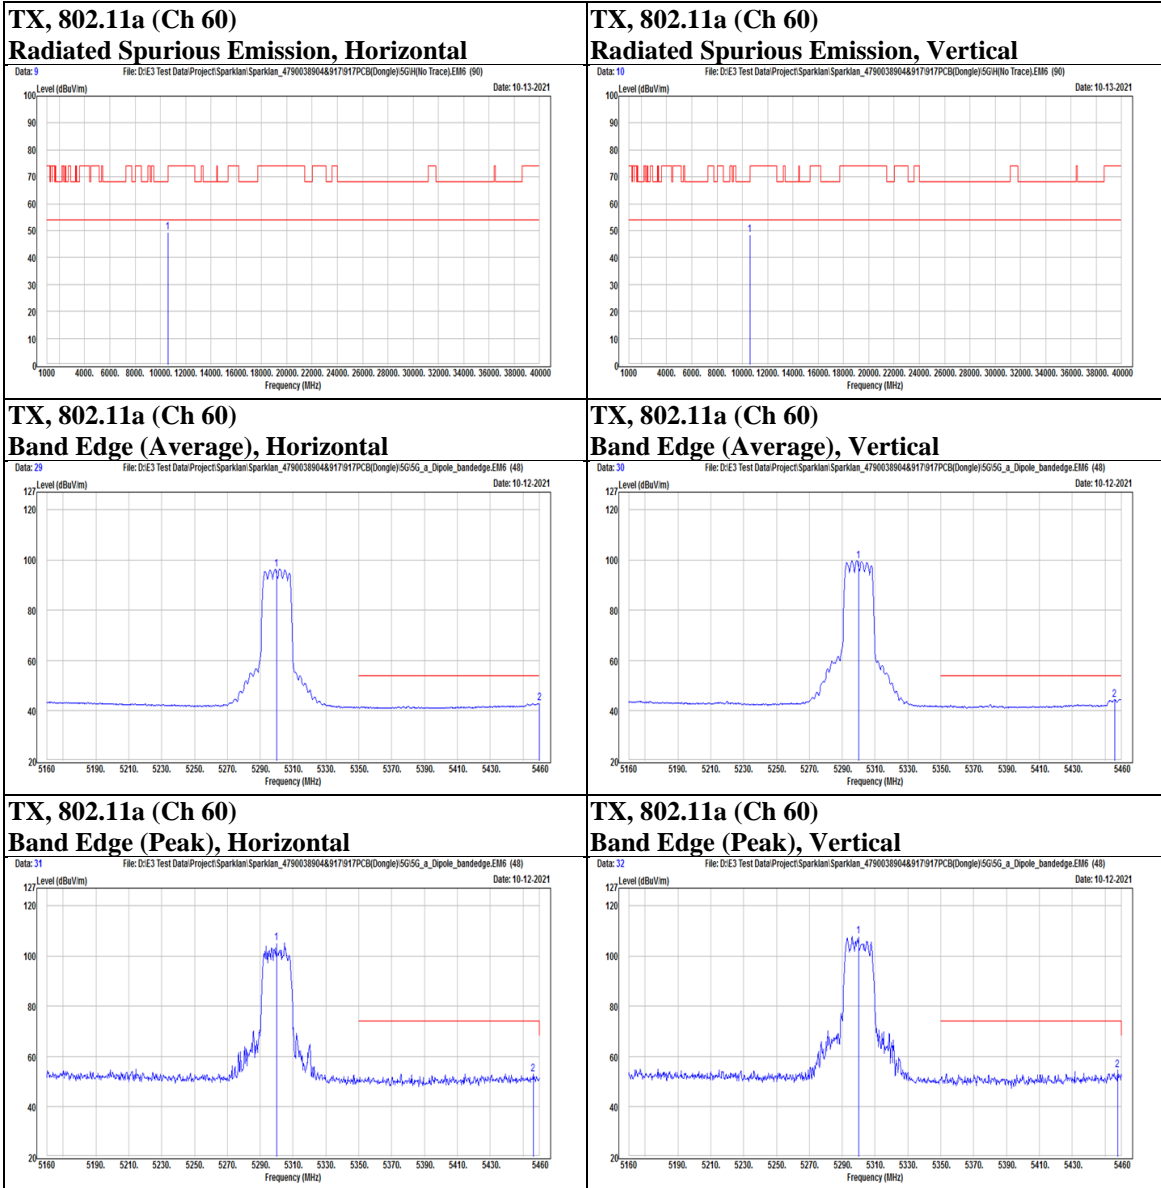



Test report No. : 4790038917B-US-R1-V0
Page : 44 of 123
Issued date : 2022/1/13
FCC ID : RYK-WUBT239ACND

| | | | |
|------|---------|---------|----|
| Mode | 802.11a | Channel | 64 |
|------|---------|---------|----|

| Polarization | Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
|--------------|----------|-----------|---------|---------|----------|----------|--------|--------|
| | | (MHz) | (dBuV) | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | |
| Horizontal | @ | 5320 | 90.39 | 13.23 | 103.62 | N/A | N/A | PK |
| | @ | 5320 | 81.85 | 13.23 | 95.08 | N/A | N/A | AVG |
| | | 5350.2 | 28.89 | 13.26 | 42.15 | 54 | -11.85 | AVG |
| | | 5442.3 | 40.22 | 13.64 | 53.86 | 74 | -20.14 | PK |
| | * | 10640 | 31.69 | 17.82 | 49.51 | 74 | -24.49 | PK |
| Vertical | @ | 5320 | 92.41 | 13.23 | 105.64 | N/A | N/A | PK |
| | @ | 5320 | 84.71 | 13.23 | 97.94 | N/A | N/A | AVG |
| | | 5350.8 | 50 | 13.26 | 63.26 | 74 | -10.74 | PK |
| | | 5352.3 | 29.69 | 13.26 | 42.95 | 54 | -11.05 | AVG |
| | * | 10640 | 31.53 | 17.82 | 49.35 | 74 | -24.65 | PK |


Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0

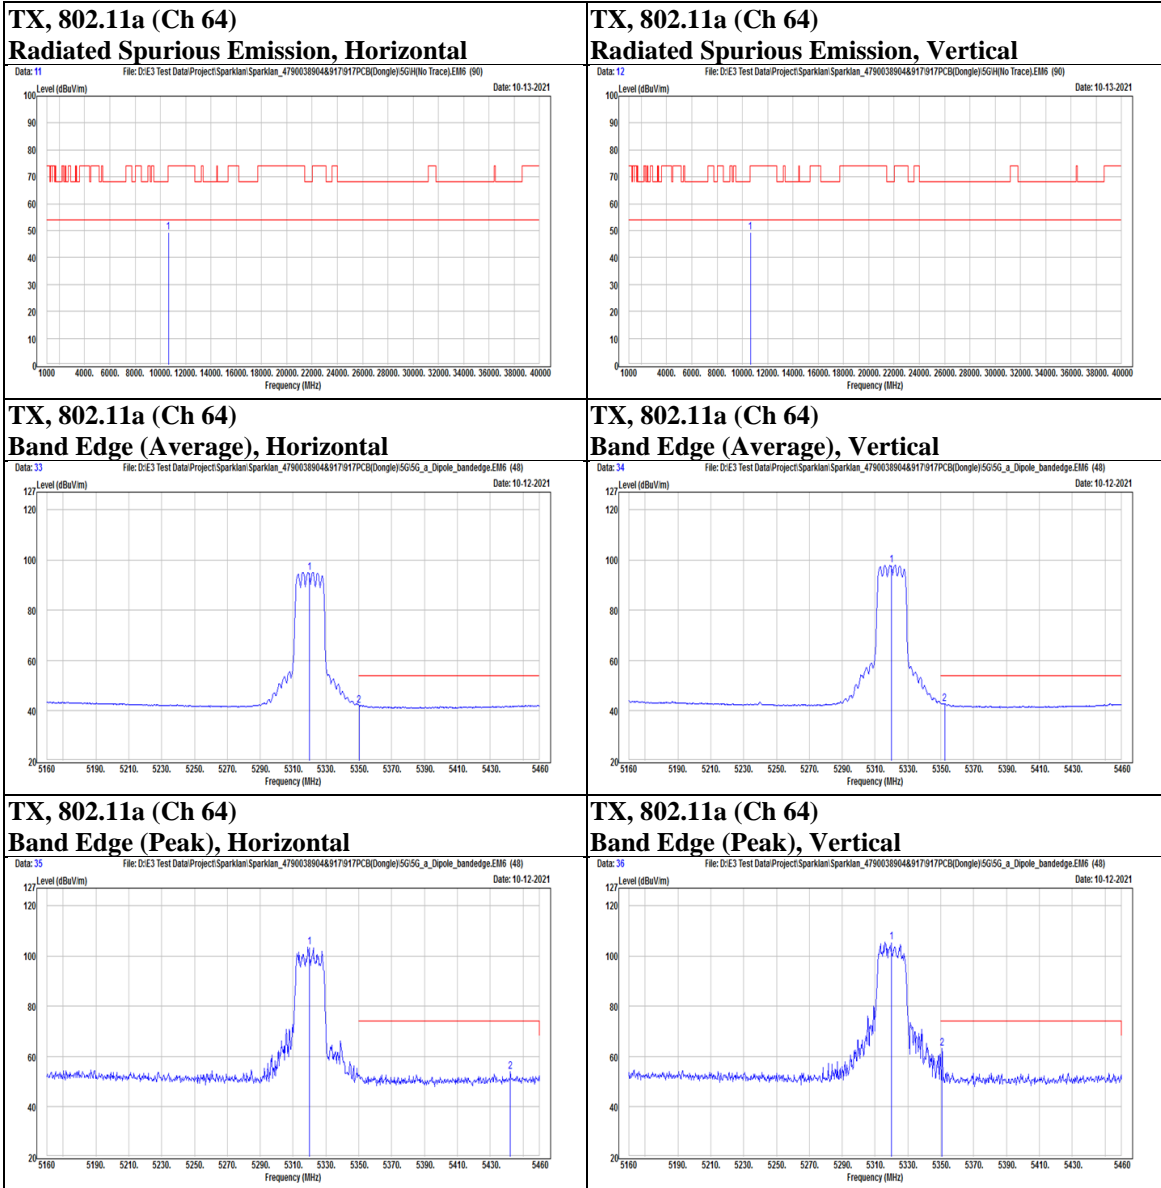



| | | | |
|------|---------|---------|-----|
| Mode | 802.11a | Channel | 100 |
|------|---------|---------|-----|

| Polarization | Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
|--------------|----------|-----------|---------|---------|----------|----------|--------|--------|
| | | (MHz) | (dBuV) | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | |
| Horizontal | | 5452.85 | 39.42 | 13.68 | 53.1 | 74 | -20.9 | PK |
| | | 5452.85 | 29.8 | 13.68 | 43.48 | 54 | -10.52 | AVG |
| | | 5469.3 | 41.81 | 13.74 | 55.55 | 68.2 | -12.65 | PK |
| | @ | 5500 | 90.65 | 13.83 | 104.48 | N/A | N/A | PK |
| | @ | 5500 | 80.5 | 13.83 | 94.33 | N/A | N/A | AVG |
| | * | 11000 | 30.78 | 18.28 | 49.06 | 74 | -24.94 | PK |
| Vertical | | 5459.85 | 41.82 | 13.7 | 55.52 | 74 | -18.48 | PK |
| | | 5459.85 | 31.1 | 13.7 | 44.8 | 54 | -9.2 | AVG |
| | | 5468.95 | 45.31 | 13.74 | 59.05 | 68.2 | -9.15 | PK |
| | @ | 5500 | 95.24 | 13.83 | 109.07 | N/A | N/A | PK |
| | @ | 5500 | 85.3 | 13.83 | 99.13 | N/A | N/A | AVG |
| | | * | 11000 | 31.54 | 18.28 | 49.82 | 74 | -24.18 |


Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0

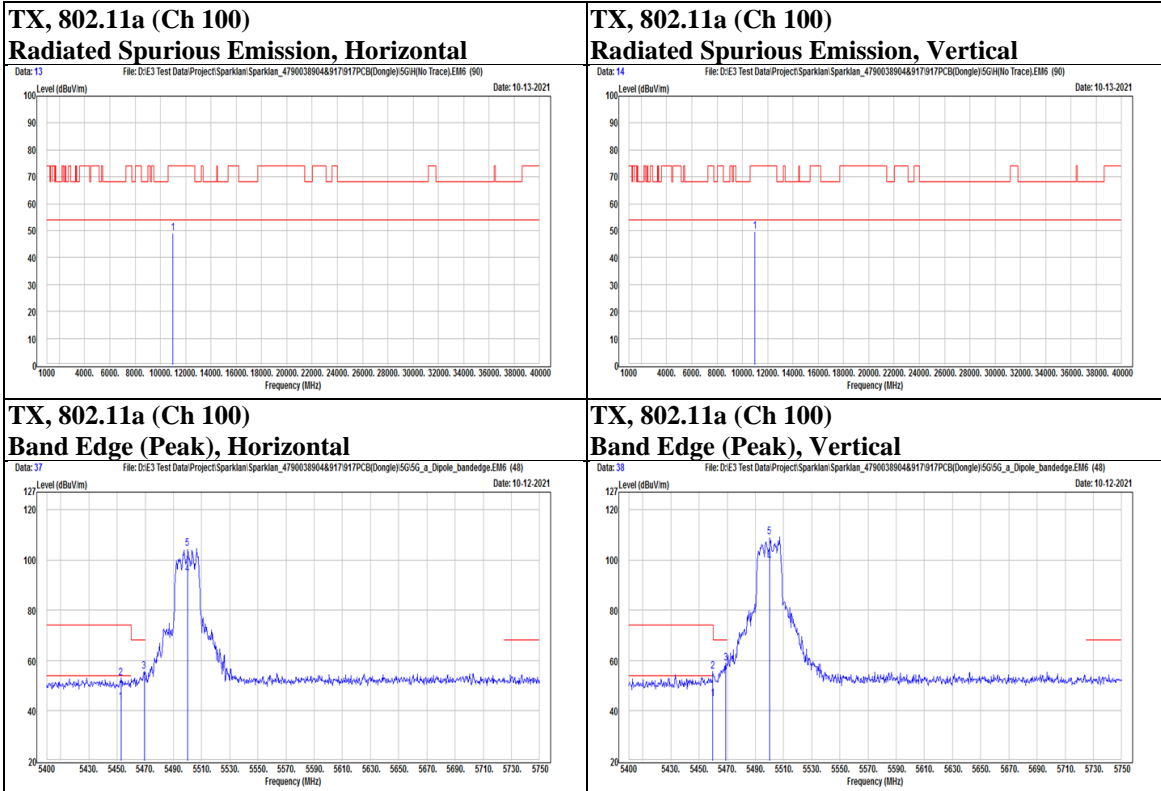



| | | | |
|------|---------|---------|-----|
| Mode | 802.11a | Channel | 116 |
|------|---------|---------|-----|

| Polarization | Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
|--------------|----------|-----------|---------|---------|----------|----------|--------|--------|
| | | (MHz) | (dBuV) | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | |
| Horizontal | | 5433.6 | 39.28 | 13.59 | 52.87 | 74 | -21.13 | PK |
| | | 5433.6 | 28.1 | 13.59 | 41.69 | 54 | -12.31 | AVG |
| | | 5460.2 | 38.58 | 13.7 | 52.28 | 68.2 | -15.92 | PK |
| | @ | 5580 | 91.75 | 13.98 | 105.73 | N/A | N/A | PK |
| | @ | 5580 | 81.2 | 13.98 | 95.18 | N/A | N/A | AVG |
| | | 5733.9 | 41.02 | 14.23 | 55.25 | 68.2 | -12.95 | PK |
| Vertical | * | 11160 | 31.7 | 18.32 | 50.02 | 74 | -23.98 | PK |
| | | 5439.55 | 39.7 | 13.63 | 53.33 | 74 | -20.67 | PK |
| | | 5439.55 | 28.39 | 13.63 | 42.02 | 54 | -11.98 | AVG |
| | | 5463.7 | 39.92 | 13.72 | 53.64 | 68.2 | -14.56 | PK |
| | @ | 5580 | 96.07 | 13.98 | 110.05 | N/A | N/A | PK |
| | @ | 5580 | 86.7 | 13.98 | 100.68 | N/A | N/A | AVG |
| | 5737.75 | 41.19 | 14.24 | 55.43 | 68.2 | -12.77 | PK | |
| | * | 11160 | 30.58 | 18.32 | 48.9 | 74 | -25.1 | PK |


Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0

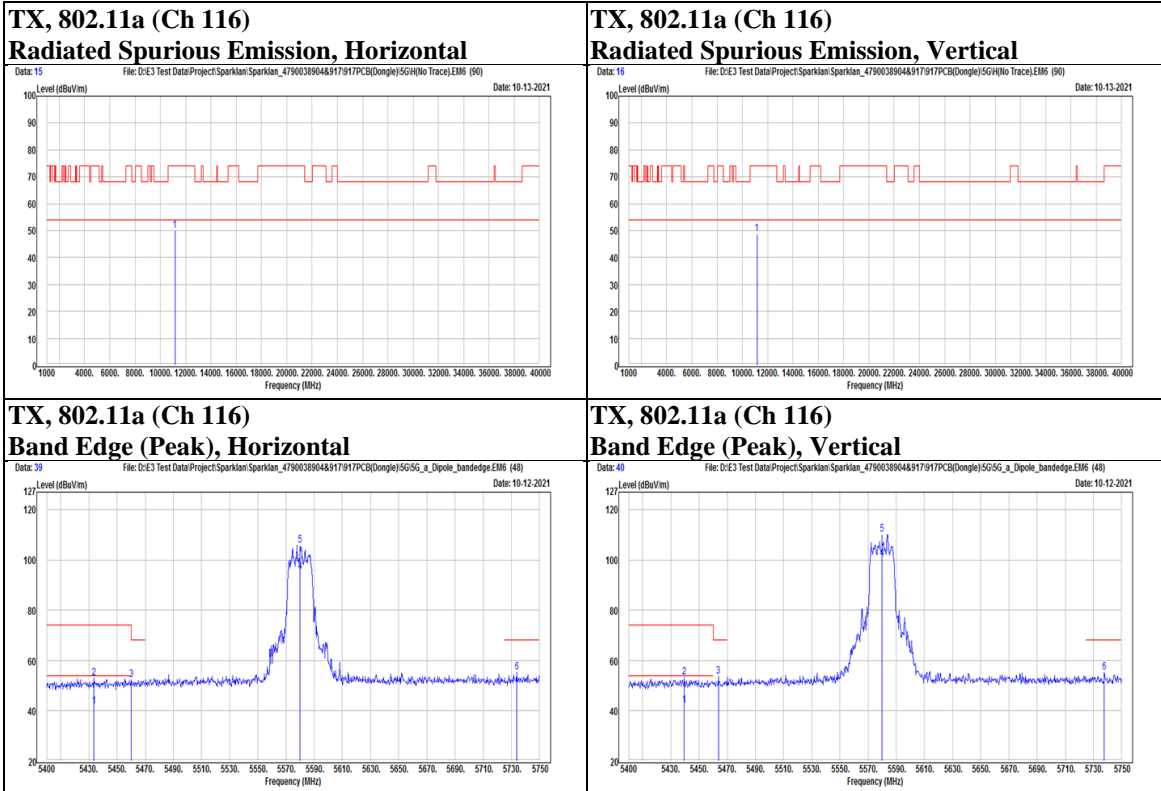



Test report No. : 4790038917B-US-R1-V0
Page : 50 of 123
Issued date : 2022/1/13
FCC ID : RYK-WUBT239ACND

| | | | |
|------|---------|---------|-----|
| Mode | 802.11a | Channel | 140 |
|------|---------|---------|-----|

| Polarization | Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
|--------------|----------|-----------|---------|---------|----------|----------|--------|--------|
| | | (MHz) | (dBuV) | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | |
| Horizontal | @ | 5700 | 90 | 14.05 | 104.05 | N/A | N/A | PK |
| | @ | 5700 | 79.5 | 14.05 | 93.55 | N/A | N/A | AVG |
| | | 5732.5 | 42.19 | 14.22 | 56.41 | 68.2 | -11.79 | PK |
| | * | 11400 | 30.96 | 18.74 | 49.7 | 74 | -24.3 | PK |
| Vertical | @ | 5700 | 93.88 | 14.05 | 107.93 | N/A | N/A | PK |
| | @ | 5700 | 83.1 | 14.05 | 97.15 | N/A | N/A | AVG |
| | | 5725.5 | 42.3 | 14.18 | 56.48 | 68.2 | -11.72 | PK |
| | * | 11400 | 30.3 | 18.74 | 49.04 | 74 | -24.96 | PK |


Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0

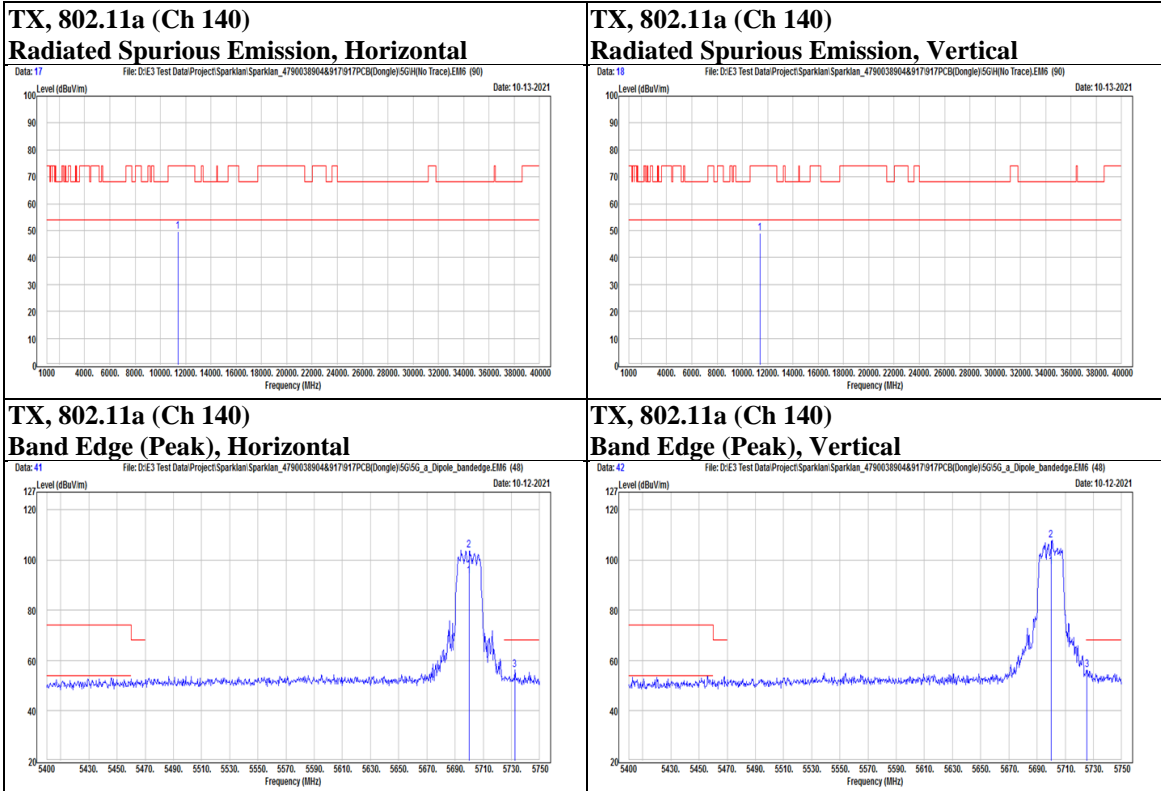



Test report No. : 4790038917B-US-R1-V0
Page : 52 of 123
Issued date : 2022/1/13
FCC ID : RYK-WUBT239ACND

| | | | |
|------|---------|---------|-----|
| Mode | 802.11a | Channel | 144 |
|------|---------|---------|-----|

| Polarization | Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
|--------------|----------|-----------|---------|---------|----------|----------|--------|--------|
| | | (MHz) | (dBuV) | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | |
| Horizontal | * | 11440 | 30.32 | 18.86 | 49.18 | 74 | -24.82 | PK |
| Vertical | * | 11440 | 30.81 | 18.86 | 49.67 | 74 | -24.33 | PK |


Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0

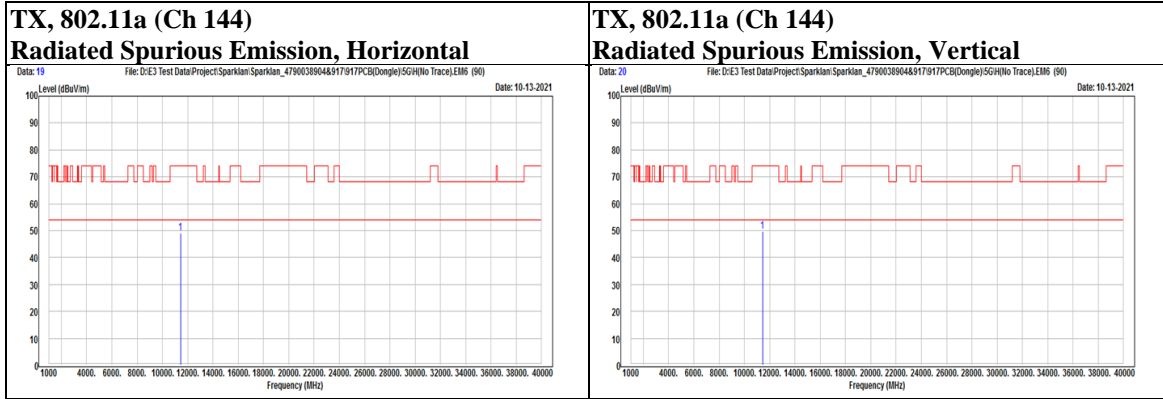

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: 17-EM-F0878 / 6.0



| | | | |
|------|---------|---------|-----|
| Mode | 802.11a | Channel | 149 |
|------|---------|---------|-----|

| Polarization | Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
|--------------|----------|-----------|---------|---------|----------|----------|--------|--------|
| | | (MHz) | (dBuV) | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | |
| Horizontal | | 5588.5 | 40.25 | 14.01 | 54.26 | 68.2 | -13.94 | PK |
| | | 5696.5 | 41.61 | 14.05 | 55.66 | 102.62 | -46.96 | PK |
| | @ | 5745 | 93.47 | 14.28 | 107.75 | N/A | N/A | PK |
| | * | 11490 | 31.74 | 19.02 | 50.76 | 74 | -23.24 | PK |
| Vertical | | 5616.5 | 40.4 | 14.03 | 54.43 | 68.2 | -13.77 | PK |
| | | 5697 | 42.23 | 14.05 | 56.28 | 102.99 | -46.71 | PK |
| | @ | 5745 | 97.51 | 14.28 | 111.79 | N/A | N/A | PK |
| | * | 11490 | 30.34 | 19.02 | 49.36 | 74 | -24.64 | PK |


Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0

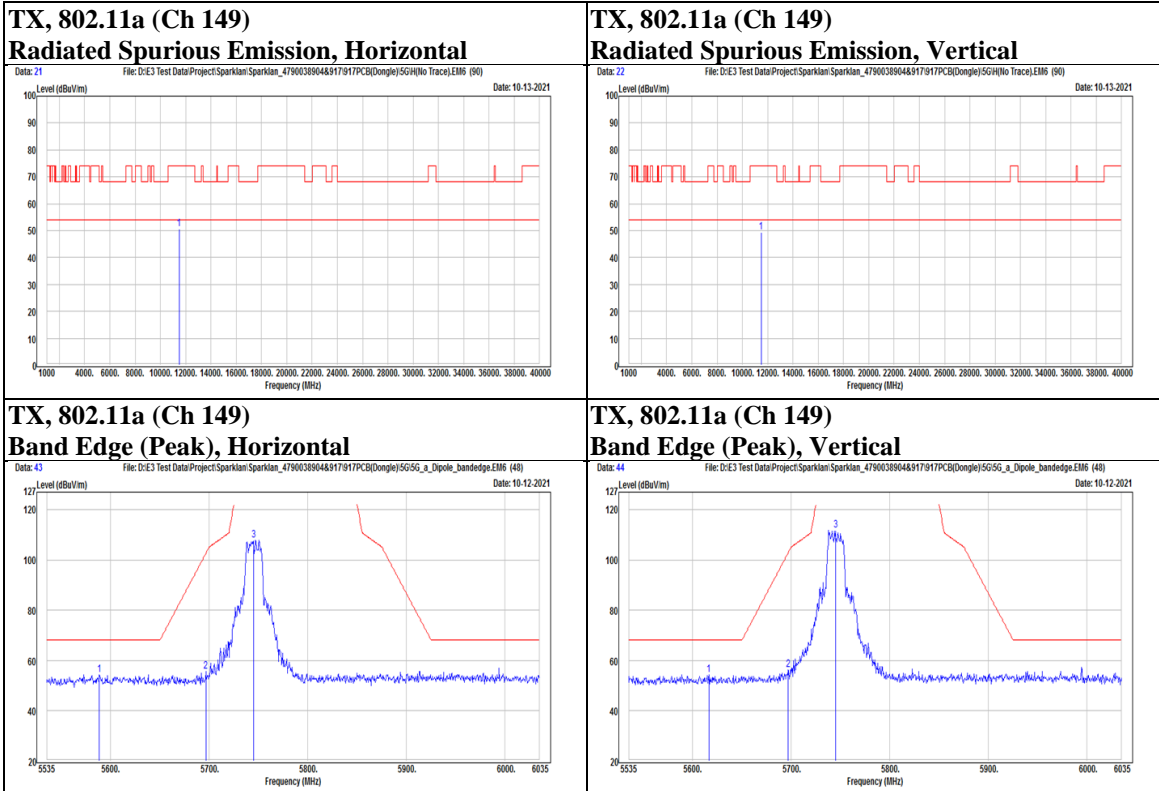



Test report No. : 4790038917B-US-R1-V0
Page : 56 of 123
Issued date : 2022/1/13
FCC ID : RYK-WUBT239ACND

| | | | |
|------|---------|---------|-----|
| Mode | 802.11a | Channel | 157 |
|------|---------|---------|-----|

| Polarization | Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
|--------------|----------|-----------|---------|---------|----------|----------|--------|--------|
| | | (MHz) | (dBuV) | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | |
| Horizontal | | 5550.5 | 40.65 | 13.89 | 54.54 | 68.2 | -13.66 | PK |
| | | 5697 | 41.15 | 14.05 | 55.2 | 102.99 | -47.79 | PK |
| | @ | 5785 | 94.68 | 14.48 | 109.16 | N/A | N/A | PK |
| | | 5910 | 40.83 | 14.97 | 55.8 | 79.27 | -23.47 | PK |
| | | 5941.5 | 40.96 | 15.01 | 55.97 | 68.2 | -12.23 | PK |
| | * | 11570 | 30.37 | 18.88 | 49.25 | 74 | -24.75 | PK |
| Vertical | | 5620.5 | 41.6 | 14.02 | 55.62 | 68.2 | -12.58 | PK |
| | | 5662 | 41.04 | 14.01 | 55.05 | 77.11 | -22.06 | PK |
| | @ | 5785 | 97.67 | 14.48 | 112.15 | N/A | N/A | PK |
| | | 5924.5 | 41.53 | 14.99 | 56.52 | 68.57 | -12.05 | PK |
| | | 5945.5 | 41.95 | 15.01 | 56.96 | 68.2 | -11.24 | PK |
| | * | 11570 | 31.16 | 18.88 | 50.04 | 74 | -23.96 | PK |


Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0

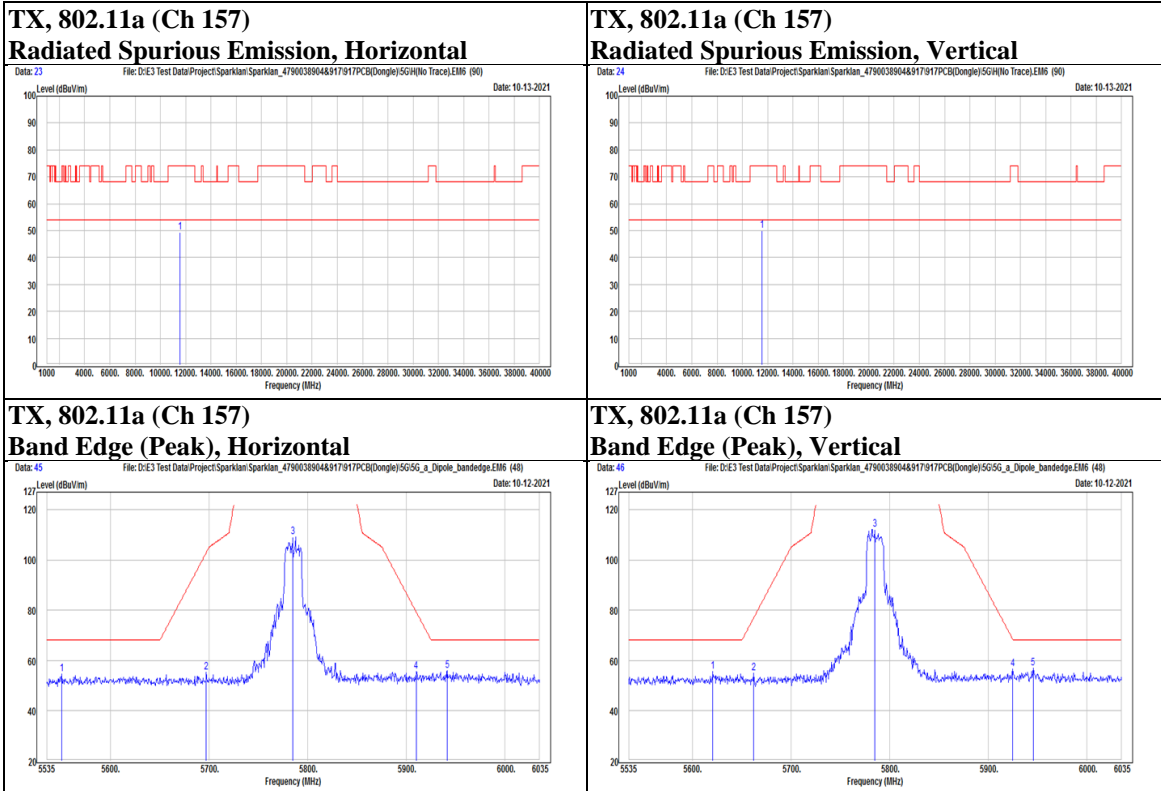



Test report No. : 4790038917B-US-R1-V0
Page : 58 of 123
Issued date : 2022/1/13
FCC ID : RYK-WUBT239ACND

| | | | |
|------|---------|---------|-----|
| Mode | 802.11a | Channel | 165 |
|------|---------|---------|-----|

| Polarization | Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
|--------------|----------|-----------|---------|---------|----------|----------|--------|--------|
| | | (MHz) | (dBuV) | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | |
| Horizontal | @ | 5825 | 92.56 | 14.69 | 107.25 | N/A | N/A | PK |
| | | 5924.5 | 40.2 | 14.99 | 55.19 | 68.57 | -13.38 | PK |
| | | 6002.5 | 41.92 | 15.17 | 57.09 | 68.2 | -11.11 | PK |
| | * | 11650 | 30.32 | 18.63 | 48.95 | 74 | -25.05 | PK |
| Vertical | @ | 5825 | 95.87 | 14.69 | 110.56 | N/A | N/A | PK |
| | | 5896.5 | 40.07 | 14.96 | 55.03 | 89.25 | -34.22 | PK |
| | | 5980 | 40.01 | 15.11 | 55.12 | 68.2 | -13.08 | PK |
| | * | 11650 | 30.46 | 18.63 | 49.09 | 74 | -24.91 | PK |


Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0

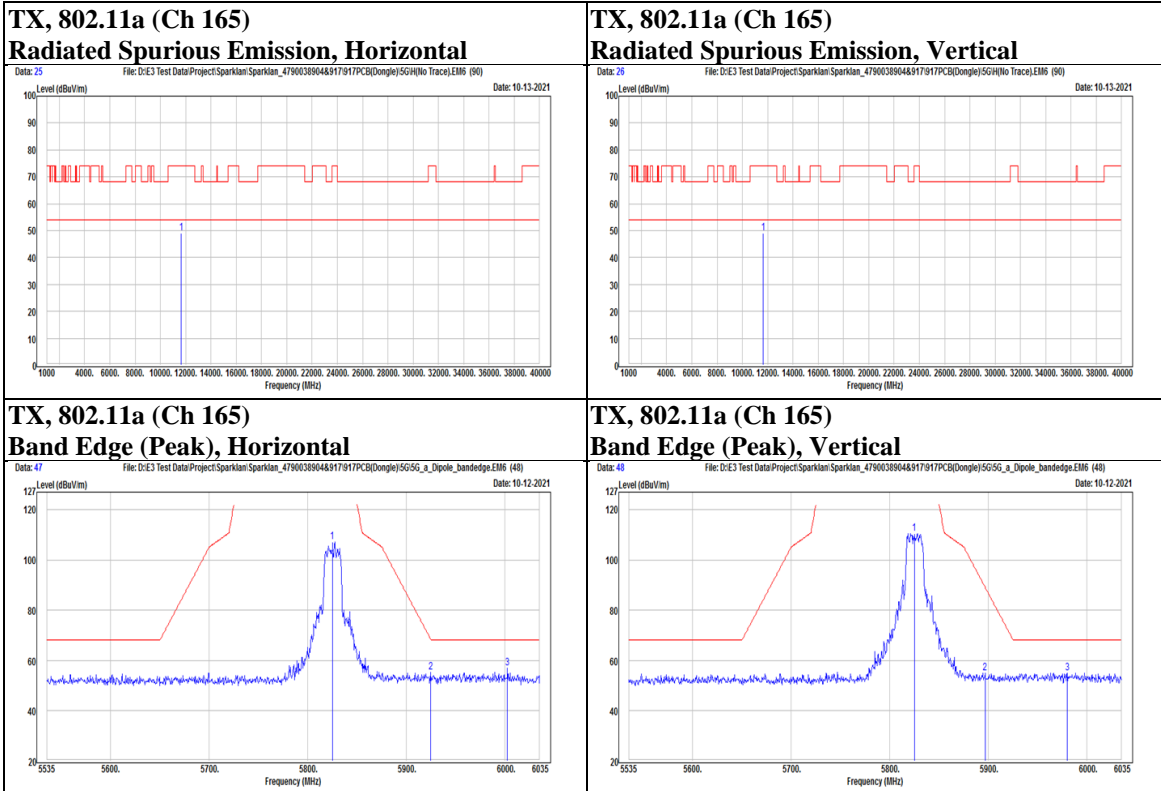



Test report No. : 4790038917B-US-R1-V0
Page : 60 of 123
Issued date : 2022/1/13
FCC ID : RYK-WUBT239ACND

| | | | |
|------|-----------------|---------|----|
| Mode | 802.11ac(VHT20) | Channel | 36 |
|------|-----------------|---------|----|

| Polarization | Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
|--------------|----------|-----------|---------|---------|----------|----------|--------|--------|
| | | (MHz) | (dBuV) | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | |
| Horizontal | | 5089.25 | 42.83 | 13.44 | 56.27 | 74 | -17.73 | PK |
| | | 5100.1 | 30.33 | 13.46 | 43.79 | 54 | -10.21 | AVG |
| | @ | 5180 | 88.49 | 13.4 | 101.89 | N/A | N/A | PK |
| | @ | 5180 | 80.88 | 13.4 | 94.28 | N/A | N/A | AVG |
| | | 10360 | 31.52 | 17.39 | 48.91 | 68.2 | -19.29 | PK |
| Vertical | | 5135.8 | 37.95 | 13.44 | 51.39 | 74 | -22.61 | PK |
| | | 5149.8 | 31.58 | 13.43 | 45.01 | 54 | -8.99 | AVG |
| | @ | 5180 | 89.63 | 13.4 | 103.03 | N/A | N/A | PK |
| | @ | 5180 | 87.44 | 13.4 | 100.84 | N/A | N/A | AVG |
| | | 10360 | 31.34 | 17.39 | 48.73 | 68.2 | -19.47 | PK |


Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0

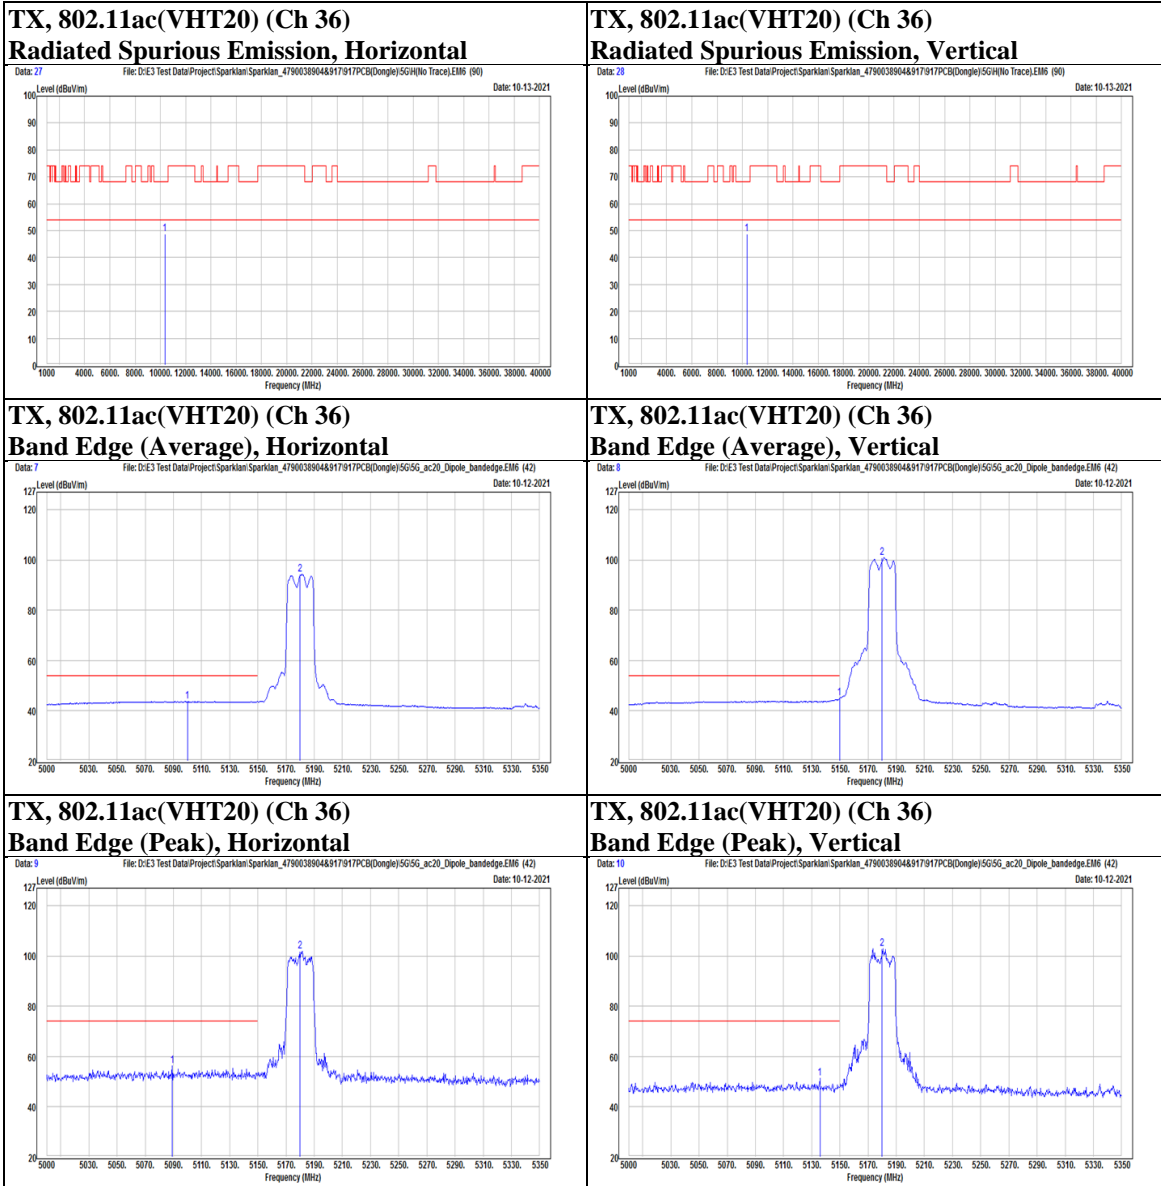



| | | | |
|------|-----------------|---------|----|
| Mode | 802.11ac(VHT20) | Channel | 44 |
|------|-----------------|---------|----|

| Polarization | Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
|--------------|----------|-----------|---------|---------|----------|----------|--------|--------|
| | | (MHz) | (dBuV) | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | |
| Horizontal | | 5087.5 | 30.32 | 13.42 | 43.74 | 54 | -10.26 | AVG |
| | | 5130.2 | 42.36 | 13.44 | 55.8 | 74 | -18.2 | PK |
| | @ | 5220 | 89.39 | 13.33 | 102.72 | N/A | N/A | PK |
| | @ | 5220 | 82.04 | 13.33 | 95.37 | N/A | N/A | AVG |
| | | 10440 | 32.29 | 17.63 | 49.92 | 68.2 | -18.28 | PK |
| Vertical | | 5102.2 | 30.38 | 13.46 | 43.84 | 54 | -10.16 | AVG |
| | | 5127.75 | 37.16 | 13.43 | 50.59 | 74 | -23.41 | PK |
| | @ | 5220 | 89.15 | 13.33 | 102.48 | N/A | N/A | PK |
| | @ | 5220 | 87.47 | 13.33 | 100.8 | N/A | N/A | AVG |
| | | 10440 | 31.89 | 17.63 | 49.52 | 68.2 | -18.68 | PK |


Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0

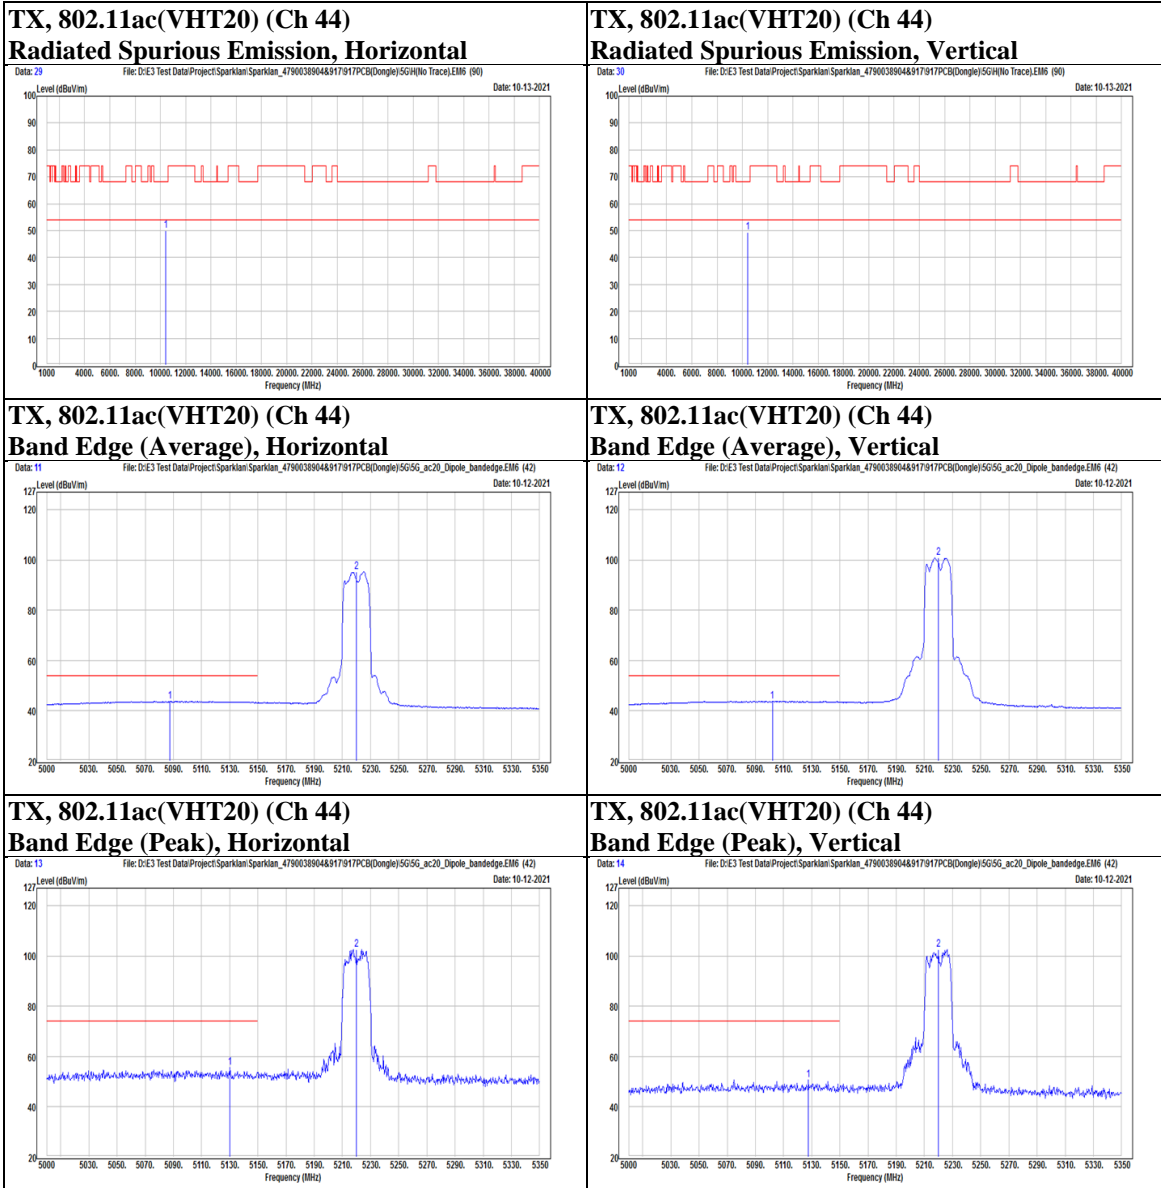



| | | | |
|------|-----------------|---------|----|
| Mode | 802.11ac(VHT20) | Channel | 48 |
|------|-----------------|---------|----|

| Polarization | Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
|--------------|----------|-----------|---------|---------|----------|----------|--------|--------|
| | | (MHz) | (dBuV) | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | |
| Horizontal | | 5080.15 | 42.72 | 13.4 | 56.12 | 74 | -17.88 | PK |
| | | 5113.05 | 30.37 | 13.45 | 43.82 | 54 | -10.18 | AVG |
| | @ | 5240 | 90.04 | 13.27 | 103.31 | N/A | N/A | PK |
| | @ | 5240 | 82.37 | 13.27 | 95.64 | N/A | N/A | AVG |
| | | 10480 | 31.46 | 17.69 | 49.15 | 68.2 | -19.05 | PK |
| Vertical | | 5034.65 | 36.85 | 13.13 | 49.98 | 74 | -24.02 | PK |
| | | 5106.75 | 30.58 | 13.46 | 44.04 | 54 | -9.96 | AVG |
| | @ | 5240 | 89.91 | 13.27 | 103.18 | N/A | N/A | PK |
| | @ | 5240 | 87.66 | 13.27 | 100.93 | N/A | N/A | AVG |
| | | 10480 | 31.71 | 17.69 | 49.4 | 68.2 | -18.8 | PK |

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 6.0