



NVLAP LAB CODE 200707-0



## FCC PART 15.227

# EMI MEASUREMENT AND TEST REPORT

For

**DynaPoint (Dong Guan) Inc.**

The Sixth Industrial Park, Shangsha, South Area ChangAn,  
DongGuan, GuangDong, China 523880

**FCC ID: RYLH1T5000**

|  |  |
|--|--|
| <b>This Report Concerns:</b><br><input checked="" type="checkbox"/> Original Report  | <b>Equipment Type:</b><br>Wireless Mouse |
| <b>Test Engineer:</b> Cinderallar Chen <i>Cinderallar Chen</i>   |  |
| <b>Report No.:</b> RSZ07060701   |  |
| <b>Test Date:</b> 2007-06-12   |  |
| <b>Report Date:</b> 2007-06-16   |  |
| <b>Reviewed By:</b> EMC Manager: Boni Baniquid <i>Boni</i>   |  |
| <b>Prepared By:</b> Bay Area Compliance Laboratory Corp. (Shenzhen)<br>6/F, the 3rd Phase of WanLi Industrial Building,<br>ShiHua Road, FuTian Free Trade Zone<br>Shenzhen, Guangdong, China<br>Tel: +86-755-33320018<br>Fax: +86-755-33320008 |  |

**Note:** This test report is for the customer shown above and their specific product only. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratory Corp. (Shenzhen). This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government.

## TABLE OF CONTENTS

|   |           |
|---|-----------|
| <b>GENERAL INFORMATION.....</b>                                     | <b>3</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....             | 3         |
| OBJECTIVE .....   | 3         |
| RELATED SUBMITTAL(S)/GRANT(S).....                                  | 3         |
| TEST METHODOLOGY .....  | 3         |
| TEST FACILITY .....   | 3         |
| <b>SYSTEM TEST CONFIGURATION.....</b>                               | <b>4</b>  |
| JUSTIFICATION .....   | 4         |
| EUT EXERCISE SOFTWARE .....   | 4         |
| SPECIAL ACCESSORIES .....   | 4         |
| SCHEMATICS AND BLOCK DIAGRAM.....                                   | 4         |
| EQUIPMENT MODIFICATIONS .....                                       | 4         |
| CONFIGURATION OF TEST SETUP .....                                   | 5         |
| BLOCK DIAGRAM OF TEST SETUP .....                                   | 5         |
| <b>SUMMARY OF TEST RESULTS .....</b>                                | <b>6</b>  |
| <b>§15.203 - ANTENNA REQUIREMENT.....</b>                           | <b>7</b>  |
| STANDARD APPLICABLE .....   | 7         |
| <b>§15.205, §15.209, §15.227(A) - RADIATED EMISSIONS TEST .....</b> | <b>8</b>  |
| STANDARD APPLICABLE .....   | 8         |
| MEASUREMENT UNCERTAINTY .....                                       | 8         |
| EUT SETUP .....   | 8         |
| EMI TEST RECEIVER SETUP.....  | 9         |
| TEST EQUIPMENT LIST AND DETAILS.....                                | 9         |
| CORRECTED AMPLITUDE & MARGIN CALCULATION .....                      | 9         |
| TEST RESULTS SUMMARY .....  | 9         |
| TEST DATA .....   | 10        |
| <b>§15.227(B) – OUT OF BAND EMISSIONS .....</b>                     | <b>12</b> |
| STANDARD APPLICABLE .....   | 12        |
| TEST EQUIPMENT LIST AND DETAILS.....                                | 12        |
| TEST DATA .....   | 12        |

---

## GENERAL INFORMATION

---

### Product Description for Equipment under Test (EUT)

The *DynaPoint (Dong Guan) Inc.*'s product, model number: *H1T5000/26-339* or the "EUT" as referred to in this report is a *Wireless Mouse*. The EUT is measured approximately 11.5 cm L x 5.5 cm W x 3.5 cm H. rated input voltage: DC 3V battery.

*\* The test data gathered are from production sample, serial number: 0706016, provided by the manufacturer, we received EUT on 2007-06-07.*

### Objective

This Type approval report is prepared on behalf of *DynaPoint (Dong Guan) Inc.* in accordance with Part 2, Subpart J, and Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC rules, sec 15.203, 15.205, 15.209 and sec 15.227.

### Related Submittal(s)/Grant(s)

No Related Submittals.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### Test Facility

The Test site used by Bay Area Compliance Laboratory Corp. (Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratory Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 04, 2004. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratory Corp. (Shenzhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0). The current scope of accreditations can be found at <http://ts.nist.gov/ts/htdocs/210/214/scopes/2007070.htm>

## SYSTEM TEST CONFIGURATION

---

### Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

### EUT Exercise Software

N/A.

### Special Accessories

The special accessories were supplied by Bay Area Compliance Laboratory Corp. (Shenzhen).

### Schematics and Block Diagram

Please refer to the Exhibit D.


### Equipment Modifications

Bay Area Compliance Laboratory Corp. (Shenzhen) has not done any modification on the EUT.

## Configuration of Test Setup



## Block Diagram of Test Setup

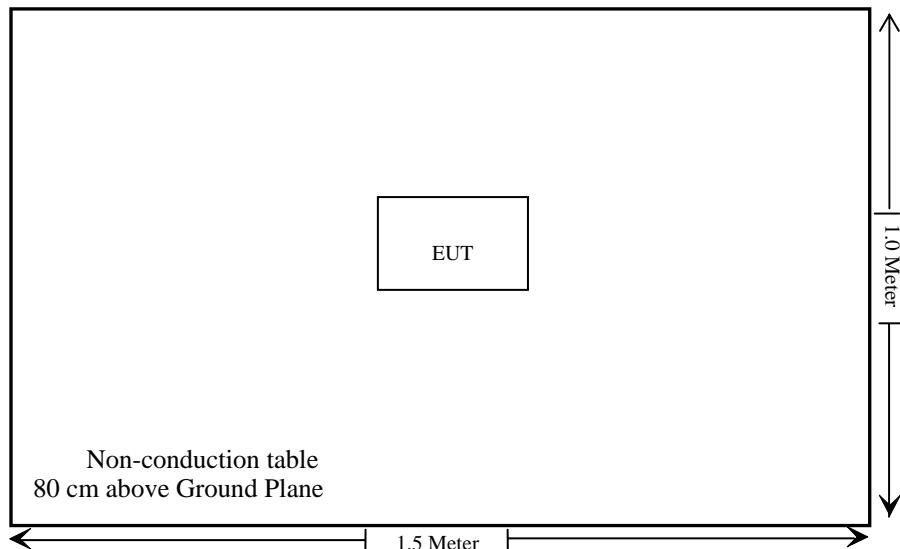

**SUMMARY OF TEST RESULTS**

| FCC RULES  | DESCRIPTION OF TEST          | RESULT    |
|------------|------------------------------|-----------|
| §15.203    | Antenna requirement          | Compliant |
| §15.205    | Restricted Band of operation | Compliant |
| §15.209    | Radiated Emissions Limit     | Compliant |
| §15.227(a) | Fundamental Field Strength   | Compliant |
| §15.227(b) | Out of band emissions        | Compliant |

---

## §15.203 - ANTENNA REQUIREMENT

---

### Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has a permanent antenna, fulfill the requirement of this section.

**Result:** Compliant

## §15.205, §15.209, §15.227(a) - RADIATED EMISSIONS TEST

### Standard Applicable

According to §15.227 (a), The field strength if any emission within this band shall not exceed 10,000 microvolts/meter at 3 meters.

(b), the field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in §15.209.


### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is  $\pm 4.0$  dB.

The fundamental data was measured in average and peak detection mode: set the VBW AVE on, then record the data.

### EUT Setup

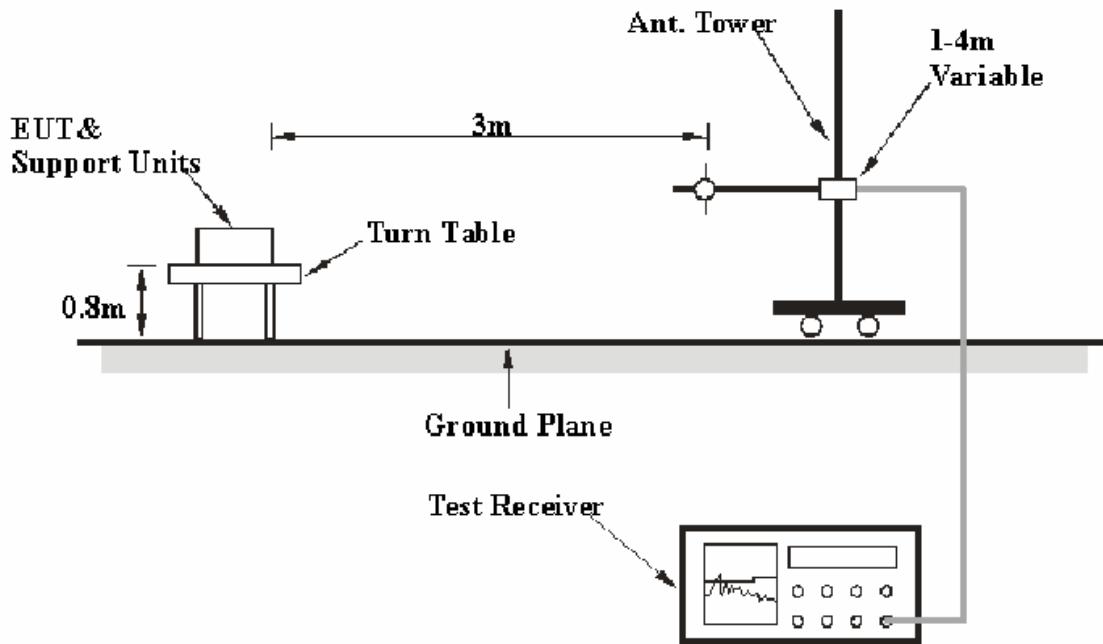

The radiated emission tests were performed in the 3-meter chamber A test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC Part 15.227 limits.

## EMI Test Receiver Setup

According to FCC Rules, 47 CFR 15.33, the EUT emissions were investigated from 27 to 1000 MHz.

During the radiated emission test, the EMI test Receiver was set with the following configurations:

| <b>Frequency Range</b> | <b>RBW</b> | <b>Video B/W</b> |
|------------------------|------------|------------------|
| Below 30 MHz           | 10 kHz     | 30 kHz           |
| 30 – 1000 MHz          | 100 kHz    | 300 kHz          |

## Test Equipment List and Details

| Manufacturer    | Description          | Model   | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|----------------------|---------|---------------|------------------|----------------------|
| HP              | Amplifier            | HP8447E | 1937A01046    | 2006-11-15       | 2007-11-15           |
| Rohde & Schwarz | EMI Test Receiver    | ESCI    | 100035        | 2006-09-29       | 2007-09-29           |
| Sunol Sciences  | Broadband Antenna    | JB1     | A040904-2     | 2006-08-14       | 2007-08-14           |
| ETS             | Passive Loop Antenna | 6512    | 00029604      | 2006-08-25       | 2007-08-25           |

\* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corr. Amp l.}$$

## Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.227 and 15.209, with the worst margin reading of:

**7.8 dB at 351.583475 MHz in the Horizontal polarization.**

## Test Data


### Environmental Conditions

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 25 °C     |
| <b>Relative Humidity:</b> | 53 %      |
| <b>ATM Pressure:</b>      | 101.0 kPa |

*The testing was performed by Cinderallar Chen on 2007-06-12.*

*Test mode: Transmitting*

| Indicated   |                      | Table Angle Degree | ANT. Height (m) | Detector (PK/AV) | Correction Factor  |                 |                    | Corr. Ampl. (dB $\mu$ V/m) | FCC PART 15.227      |             |         |
|-------------|----------------------|--------------------|-----------------|------------------|--------------------|-----------------|--------------------|----------------------------|----------------------|-------------|---------|
| Freq. (MHz) | Reading (dB $\mu$ V) |                    |                 |                  | Ant. Factor (dB/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) |                            | Limit (dB $\mu$ V/m) | Margin (dB) | Remarks |
| 27.045      | 34.96                | 246                | 1.0             | AV               | 31.9               | 0.5             | 26.8               | 40.56                      | 80                   | 39.44       | Fund.   |
| 27.045      | 35.27                | 153                | 1.0             | PK               | 31.9               | 0.5             | 26.8               | 40.87                      | 100                  | 59.13       | Fund.   |

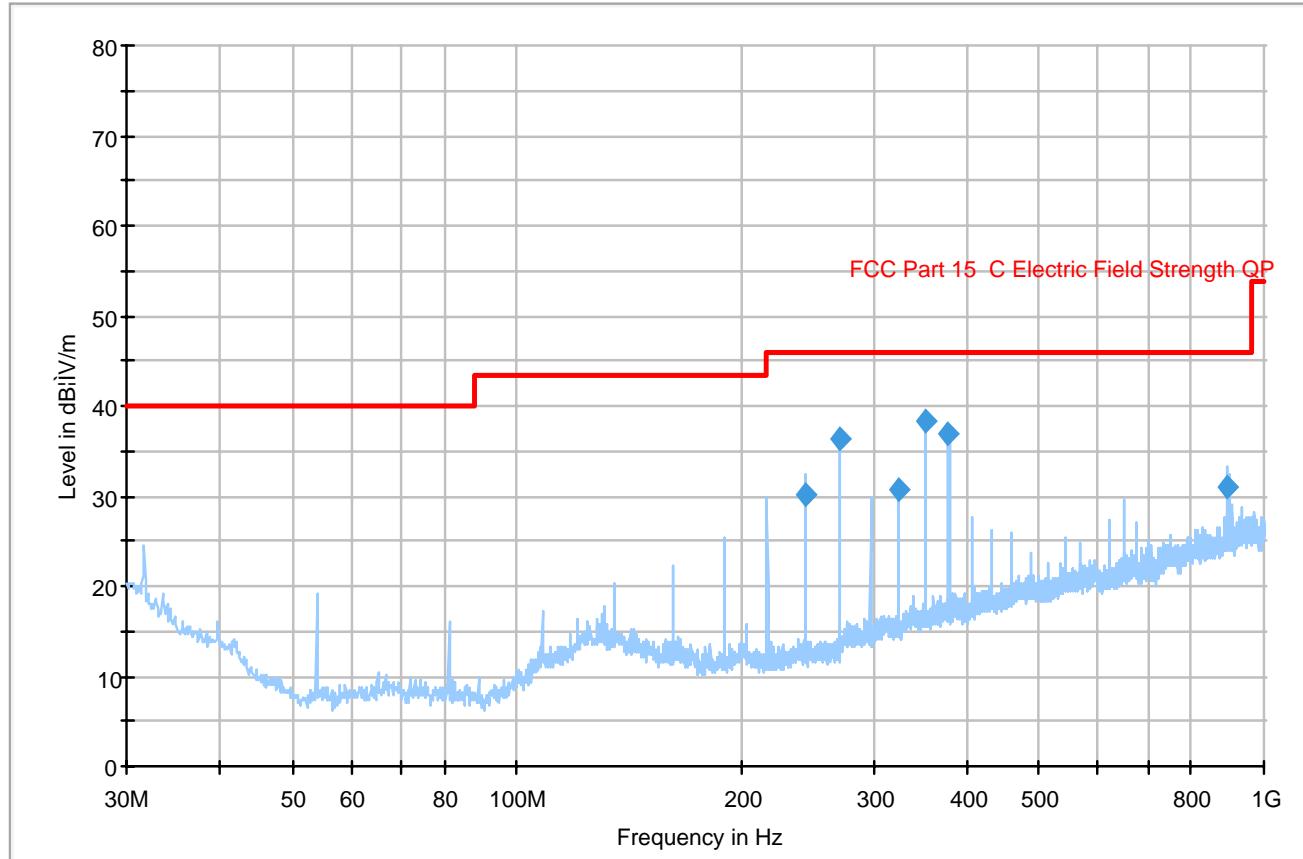

| Frequency (MHz) | Quasi Peak (dB $\mu$ V/m) | Antenna Height (cm) | Polarity | Turntable Position (deg) | Corr. (dB) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|---------------------------|---------------------|----------|--------------------------|------------|----------------------|-------------|
| 351.583475      | 38.2                      | 99.0                | H        | 278.0                    | -9.4       | 46.0                 | 7.8         |
| 378.603650      | 37.0                      | 100.0               | H        | 92.0                     | -8.4       | 46.0                 | 9.0         |
| 270.440625      | 36.4                      | 114.0               | H        | 84.0                     | -12.5      | 46.0                 | 9.6         |
| 890.295475      | 31.0                      | 400.0               | V        | 91.0                     | -0.5       | 46.0                 | 15.0        |
| 324.649900      | 30.7                      | 99.0                | H        | 80.0                     | -10.1      | 46.0                 | 15.3        |
| 243.465250      | 30.1                      | 136.0               | H        | 86.0                     | -13.0      | 46.0                 | 15.9        |

## §15.227(b) – OUT OF BAND EMISSIONS

### Standard Applicable

According to §15.227(b), the field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in §15.209.

### Test Equipment List and Details

| Manufacturer    | Description       | Model   | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-------------------|---------|---------------|------------------|----------------------|
| Rohde & Schwarz | EMI Test Receiver | ESCI    | 100035        | 2006-09-29       | 2007-09-29           |
| HP              | Amplifier         | HP8447E | 1937A01046    | 2006-11-15       | 2007-11-15           |
| HP              | Preamplifier      | 8449B   | 3008A00277    | 2006-09-29       | 2007-09-29           |
| Sunol Sciences  | Broadband Antenna | JB1     | A040904-2     | 2006-08-14       | 2007-08-14           |

\* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

### Test Data


#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 53 %      |
| ATM Pressure:      | 1010 mbar |

The testing was performed by Cinderallar Chen on 2007-06-12.

Test Mode: Transmitting

| Indicated   |                      | Table Angle Degree | ANT. Height (m) | Detector (PK/AV) | Correction Factor  |                 |                    | Corr. Ampl. (dB $\mu$ V/m) | FCC PART 15.227/209  |             |         |
|-------------|----------------------|--------------------|-----------------|------------------|--------------------|-----------------|--------------------|----------------------------|----------------------|-------------|---------|
| Freq. (MHz) | Reading (dB $\mu$ V) |                    |                 |                  | Ant. Factor (dB/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) |                            | Limit (dB $\mu$ V/m) | Margin (dB) | Remarks |
| 26.96       | 17.23                | 246                | 1.0             | QP               | 31.9               | 0.5             | 26.8               | 22.83                      | 49.5                 | 26.67       | /       |
| 27.28       | 16.75                | 153                | 1.0             | QP               | 31.9               | 0.5             | 26.8               | 22.35                      | 49.5                 | 27.15       | /       |

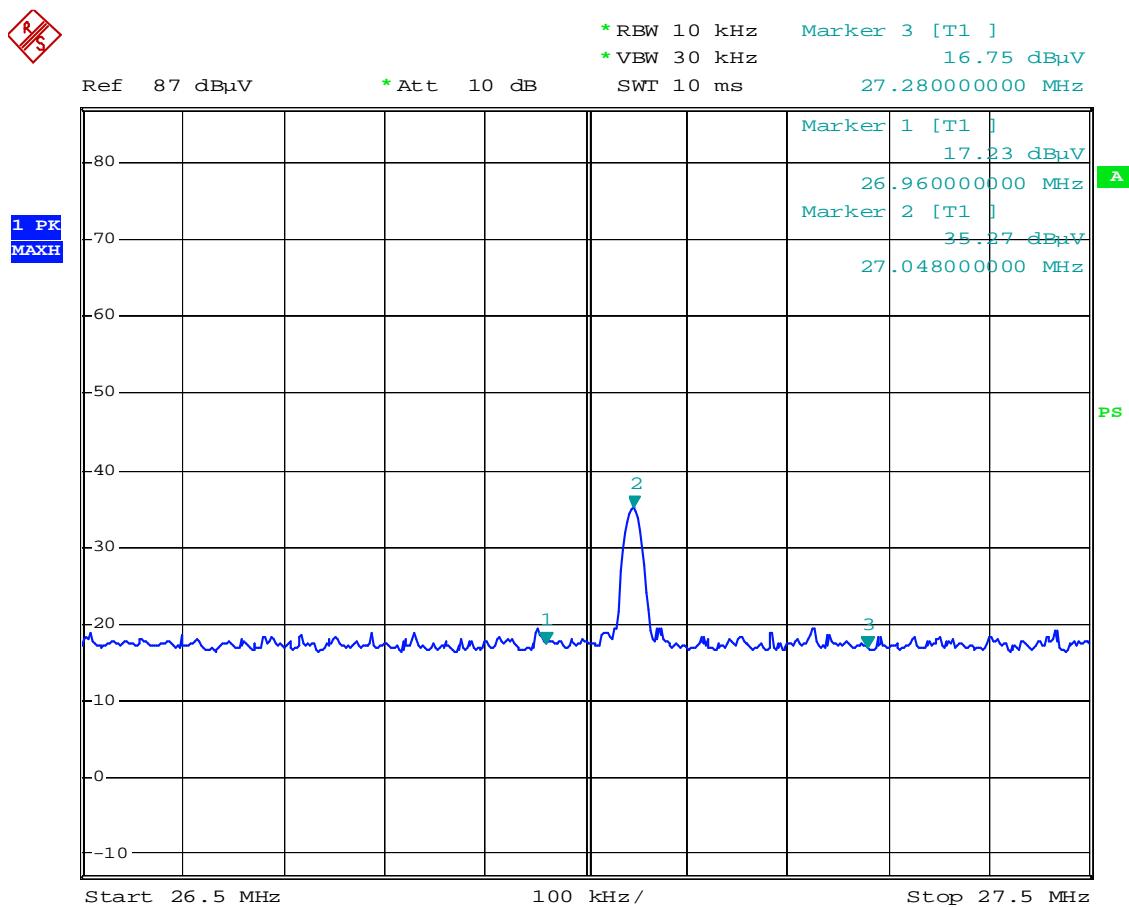

Dynapoint Band edge

Date: 12.JUN.2007 13:59:23